



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 1 of 244

TEST REPORT

Application No.: KSCR2407001236AT
FCC ID: 2AH25K2A13
IC: 22621-K2A13
Applicant: Shanghai Sunmi Technology Co.,Ltd.
Address of Applicant: Room 505, No.388 Song Hu Road, Yang Pu District, Shanghai, China
Manufacturer: Shanghai Sunmi Technology Co.,Ltd.
Address of Manufacturer: Room 505, No.388 Song Hu Road, Yang Pu District, Shanghai, China
Equipment Under Test (EUT):
EUT Name: Self-Checkout Kiosk
Model No.: F4E02
HVIN: F4E02, F4E02(B)
Trade Mark: SUNMI
Standard(s) : 47 CFR Part 15, Subpart C 15.247
RSS-247 Issue 3, August 2023
RSS-Gen Issue 5 Amendment 2 (February 2021)
Date of Receipt: 2024-07-03
Date of Test: 2024-08-08 to 2024-08-19
Date of Issue: 2024-08-19

Test Result:

Pass*

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 2 of 244

Revision Record			
Version	Description	Date	Remark
00	Original	2024-08-19	/

Authorized for issue by:			
Tested By		Damon Zhou	
		Damon Zhou /Project Engineer	
Approved By		Terry Hou	
		Terry Hou /Reviewer	



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 3 of 244

2 Test Summary

Radio Spectrum Technical Requirement				
Item	FCC Requirement	IC Requirement	Method	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	RSS-Gen Clause 6.8	N/A	Customer Declaration

N/A: Not applicable

Radio Spectrum Matter Part				
Item	FCC Requirement	IC Requirement	Method	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.207	RSS-Gen Clause 8.8	ANSI C63.10 (2013) Section 6.2	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247a(2)	RSS-247 Clause 5.2(a)	ANSI C63.10 (2013) Section 11.8.1	Pass
Conducted Average Output Power	47 CFR Part 15, Subpart C 15.247(b)(3)	RSS-247 Clause 5.4(d)	ANSI C63.10 (2013) Section 11.9.2	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247(e)	RSS-247 Clause 5.2(b)	ANSI C63.10 (2013) Section 11.10.3	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247(d)	RSS-247 Clause 5.5	ANSI C63.10 (2013) Section 11.13.3.2	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247(d)	RSS-247 Clause 5.5	ANSI C63.10 (2013) Section 11.11	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	RSS-247 Section 3.3 & RSS-Gen Section 8.9	ANSI C63.10 (2013) Section 6.10.5	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	RSS-247 Section 3.3 & RSS-Gen Section 8.9	ANSI C63.10 (2013) Section 6.4,6.5,6.6	Pass
99% Bandwidth	-	RSS-Gen Section 6.7	ANSI C63.10 Section 6.9.3	Pass

Remark:

The product is divided into two different configurations (SKU1, SKU2).

SKU1: Large scan code window, the HVIN is F4E02(B)

SKU2: Small scan code window, the HVIN is F4E02

Except for the above differences, everything else is the same.

After Pre-scan test, only SKU2(HVIN: F4E02) was tested since their differences.

3 Contents

	Page
1 COVER PAGE.....	1
2 Test Summary	3
3 Contents	4
4 General Information	5
4.1 Details of E.U.T.....	5
4.2 Description of Support Units	5
4.3 Power level setting using in test	5
4.4 Measurement Uncertainty.....	6
4.5 Test Location	7
4.6 Test Facility.....	7
4.7 Deviation from Standards	7
4.8 Abnormalities from Standard Conditions	7
5 Equipment List.....	8
6 Radio Spectrum Technical Requirement	9
6.1 Antenna Requirement	9
7 Radio Spectrum Matter Test Results.....	11
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	11
7.2 Radiated Emissions which fall in the restricted bands.....	15
7.3 Radiated Spurious Emissions Below 1GHz.....	51
7.4 Radiated Spurious Emissions Above 1GHz	55
7.5 Conducted Average Output Power	93
7.6 Minimum 6dB Bandwidth	95
7.7 Power Spectrum Density	96
7.8 Conducted Band Edges Measurement.....	97
7.9 Conducted Spurious Emissions	99
7.10 99% Bandwidth	101
8 Test Setup Photo	102
9 EUT Constructional Details (EUT Photos)	102
10 Appendix	103

4 General Information

4.1 Details of E.U.T.

Power supply:	AC 120V/60Hz
Test Voltage:	AC 120V/60Hz
Operation Frequency:	802.11b/g/n(HT20)/ax(HE20): 2412MHz to 2462MHz; 802.11n(HT40)/ax(HE40): 2422MHz to 2452MHz
Modulation Type:	802.11b: DSSS; 802.11g/n: OFDM; 802.11ax:OFDMA
Number of Channels:	802.11b/g/n(HT20)/ax(HE20):11;802.11n(HT40)/ax(HE40):7
Channel Spacing:	5MHz
Antenna Type:	FPC Antenna
Antenna Gain:	Ant 1:2.1dBi (Provided by the manufacturer) Ant 2:2.1dBi (Provided by the manufacturer)
SN:	K288D45N00072
Firmware Version:	V 2.0

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Notebook	Lenovo	/	/

4.3 Power level setting using in test

Channel	802.11b	802.11b	802.11g	802.11g	802.11n(HT20)	802.11n(HT20)
	a	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2
1	15	14	15	14	11	11
6	17	15	15.5	13.5	12	12
11	16	15	14.5	13.5	11.5	11.5

Channel	802.11ax (HEW20)	802.11ax (HEW20)	802.11n(HT40)	802.11n(HT40)	802.11ax (HEW40)	802.11ax (HEW40)
	Ant 1	Ant 2	Ant 1	Ant 1	Ant 1	Ant 2
3	11	11	11	11	11	11
6	11	11	11	11	11	11
9	11	11	11	11	11	11

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 6 of 244

4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4×10^{-8}
2	Timeout	2s
3	Duty Cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Conducted Power	0.6dB
6	RF Power Density	2.9dB
7	Conducted Spurious Emissions	0.75dB
8	RF Radiated Power	5.2dB (Below 1GHz)
		5.9dB (Above 1GHz)
9	Radiated Spurious Emission Test	4.2dB (Below 30MHz)
		4.5dB (30MHz-1GHz)
		5.1dB (1GHz-18GHz)
		5.4dB (Above 18GHz)
10	Temperature Test	1°C
11	Humidity Test	3%
12	Supply Voltages	1.5%
13	Time	3%
Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.		

4.5 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA**

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

- **FCC**

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory. Designation Number: CN1172.

- **ISED**

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 2324E

- **VCCI**

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSC240700123603

Page: 8 of 244

5 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
Conducted Emission at Mains Terminals						
1	EMI Test Receive	R&S	ESCI	KS301101	01/15/2024	01/14/2025
2	LISN	R&S	ENV216	KS301197	01/15/2024	01/14/2025
3	LISN	Schwarzbeck	NNLK 8129	KS301091	01/15/2024	01/14/2025
4	Pulse Limiter	R&S	ESH3-Z2	KUS1902E001	01/15/2024	01/14/2025
5	CE test Cable	Thermax	/	CZ301102	01/15/2024	01/14/2025
6	Test Software	Farad	EZ-EMC	/	N.C.R	N.C.R
RF Conducted Test						
1	Spectrum Analyzer	Keysight	N9020A	KUS1911E004-2	08/24/2023	08/23/2024
2	Spectrum Analyzer	Keysight	N9020A	KUS2001M001-2	08/24/2023	08/23/2024
3	Spectrum Analyzer	Keysight	N9030B	KSEM021-1	01/15/2024	01/14/2025
4	Signal Generator	R&S	SMBV100B	KSEM032	03/19/2024	03/18/2025
5	Signal Generator	R&S	SMW200A	KSEM020-1	08/24/2023	08/23/2024
6	Signal Generator	Agilent	N5182A	KUS2001M001-1	08/24/2023	08/23/2024
7	Radio Communication Test Station	Anritsu	MT8000A	KSEM001-1	08/24/2023	08/23/2024
8	Radio Communication Analyzer	Anritsu	MT8821C	KSEM002-1	03/19/2024	03/18/2025
9	Universal Radio Communication Tester	R&S	CMW500	KUS1911E004-1	08/24/2023	08/23/2024
10	Switcher	TST	FY562	KUS2001M001-4	01/15/2024	01/14/2025
11	AC Power Source	EXTECH	6605	KS301178	N.C.R	N.C.R
12	DC Power Supply	Aglient	E3632A	KS301180	N.C.R	N.C.R
13	Conducted Test Cable	Thermax	RF01-RF04	CZ301111-CZ301120	01/15/2024	01/14/2025
14	Temp. / Humidity Chamber	TERCHY	MHK-120AK	KS301190	08/24/2023	08/23/2024
15	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-5	03/19/2024	03/18/2025
16	Software	BST	TST-PASS	/	NCR	NCR
RF Radiated Test						
1	Spectrum Analyzer	R&S	FSV40	KUS1806E003	08/24/2023	08/23/2024
2	Universal Radio Communication Tester	R&S	CMW500	KSEM009-1	03/19/2024	03/18/2025
3	Signal Generator	Agilent	E8257C	KS301066	08/24/2023	08/23/2024
4	Loop Antenna	COM-POWER	AL-130R	KUS1806E001	03/18/2023	03/17/2025
5	Bilog Antenna	TESEQ	CBL 6112D	KUS1806E005	06/29/2023	06/28/2025
6	Bilog Antenna	TESEQ	CBL 6112D	KUS1806E006	03/19/2024	03/18/2025
7	Horn-antenna(1-18GHz)	Schwarzbeck	BBHA9120D	KS301079	08/24/2023	08/23/2024
8	Horn-antenna(1-18GHz)	ETS-LINDGREN	3117	KS301186	04/07/2023	04/06/2025
9	Horn Antenna(18-40GHz)	Schwarzbeck	BBHA9170	CZ301058	01/07/2024	01/06/2026
10	Amplifier(30MHz~18GHz)	PANSHAN TECHNOLOGY	LNA:1~18G	KSEM010-1	01/15/2024	01/14/2025
11	Amplifier(18~40GHz)	PANSHAN TECHNOLOGY	LNA180400G40	KSEM038	08/24/2023	08/23/2024
12	RE Test Cable	REBES MICROWAVE	/	CZ301097	08/24/2023	08/23/2024
13	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-4	03/19/2024	03/18/2025
14	Software	Faratronic	EZ_EMG-v 3A1	/	NCR	NCR
15	Software	ESE	E3_V 6.111221a	/	NCR	NCR

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is FPC Antenna and no consideration of replacement. The best case gain of the antenna1 and antenna 2 is 2.1 dBi.

Antenna location: Refer to internal photo.



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 10 of 244

Directional Gain Calculations for MIMO:

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

Basic methodology with NANT transmit antennas, each with the same directional gain GANT dBi, being driven by NANT transmitter outputs of equal power. Directional gain is to be computed as follows:

- If any transmit signals are correlated with each other,
Directional gain = $GANT + 10 \log(NANT)$ dBi
- If all transmit signals are completely uncorrelated with each other,
Directional gain = GANT

Unequal antenna gains, with equal transmit powers. For antenna gains given by G1, G2, ..., GN dBi

- If transmit signals are correlated, then
Directional gain = $10 \log[(10G1/20 + 10G2/20 + \dots + 10GN/20)^2 / NANT]$ dBi [Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]
- If all transmit signals are completely uncorrelated, then
Directional gain = $10 \log[(10G1/10 + 10G2/10 + \dots + 10GN/10)/NANT]$ dBi

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain.

All antennas have the same gain:

Operation Frequency	Ant 1 (dBi)	Ant 2 (dBi)	Directional gain For Power(dBi)	Directional gain For PSD(dBi)
2400 MHz to 2483.5 MHz	2.1	2.1	2.1	2.1

2400 MHz to 2483.5 MHz:

Power Limit Reduction = Directional gain – 6dBi, (Directional gain < 6dBi) =0

PSD Limit Reduction = Directional gain – 6dBi, (Directional gain < 6dBi) =0

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 44.1 % RH

Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and Only the data of worst case is recorded in the report.

7.1.3 Test Setup Diagram

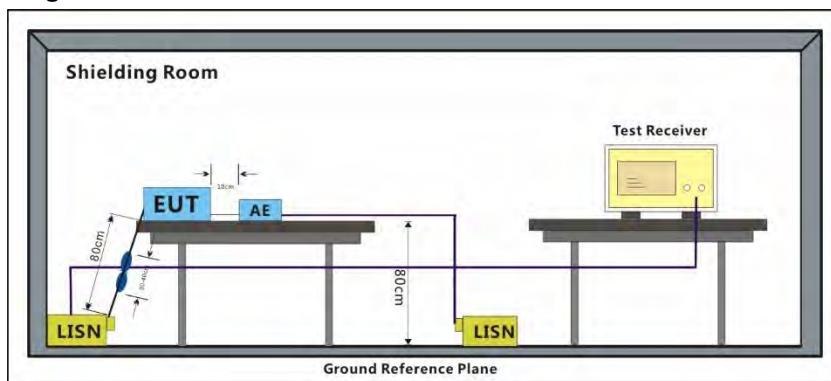

7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 13 of 244

Test Mode: 04; Line: Live line

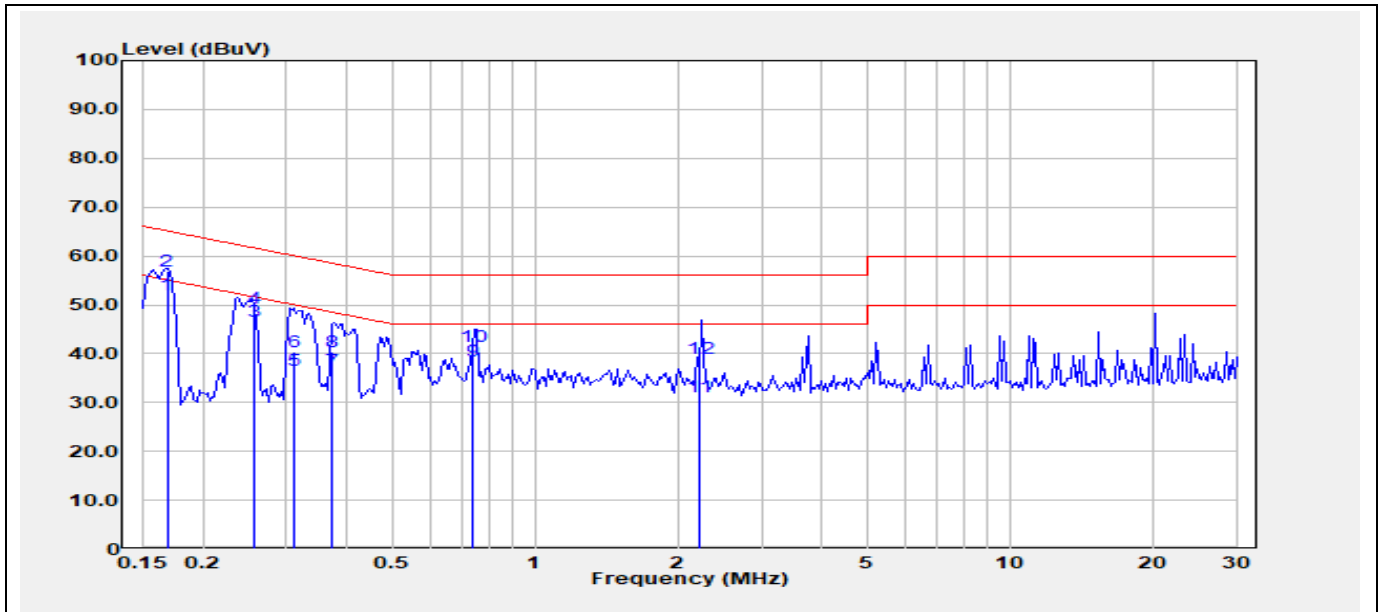

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1680	31.81	20.18	51.99	55.06	-3.07	Average
2	0.1680	36.81	20.18	56.99	65.06	-8.07	QP
3	0.2560	26.47	20.07	46.54	51.56	-5.02	Average
4	0.2560	29.38	20.07	49.45	61.56	-12.11	QP
5	0.3097	16.47	20.08	36.54	49.98	-13.43	Average
6	0.3097	20.36	20.08	40.43	59.98	-19.54	QP
7	0.3743	16.47	20.07	36.54	48.41	-11.87	Average
8	0.3743	20.44	20.07	40.51	58.41	-17.90	QP
9	0.7395	18.72	19.77	38.50	46.00	-7.50	Average
10	0.7395	21.69	19.77	41.47	56.00	-14.53	QP
11	2.2220	11.26	20.02	31.27	46.00	-14.73	Average
12	2.2220	19.12	20.02	39.14	56.00	-16.86	QP


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 14 of 244

Test Mode: 04; Line: Neutral Line

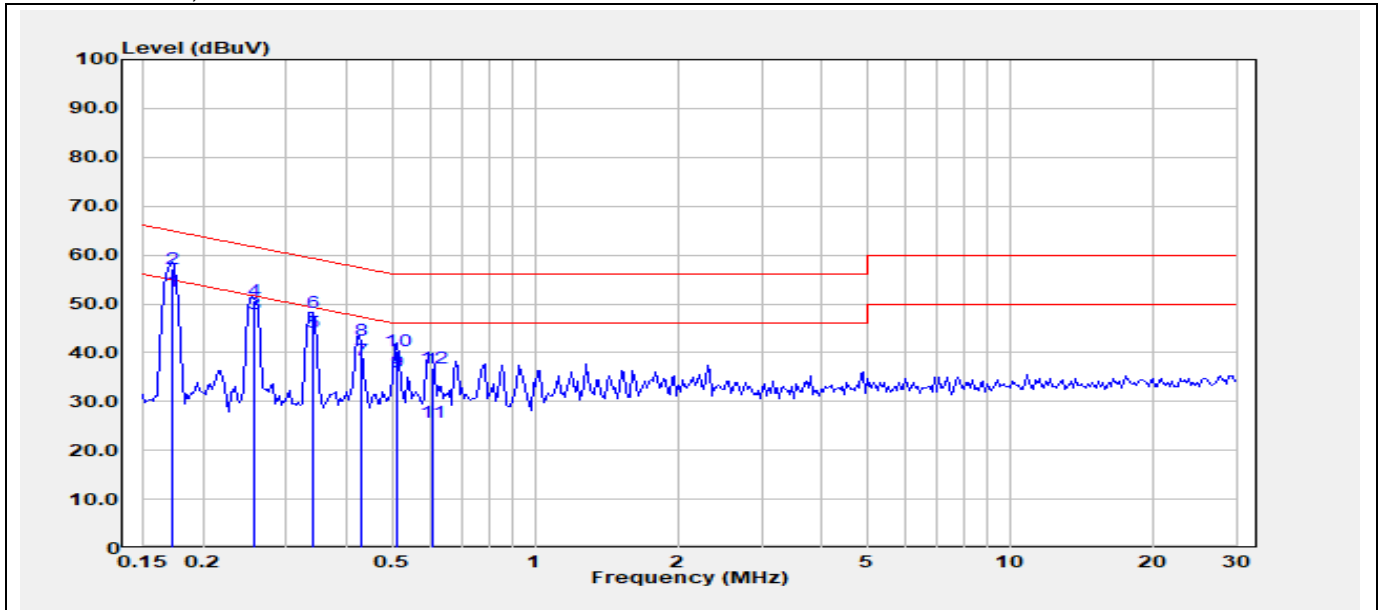

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1723	32.31	20.15	52.46	54.85	-2.39	Average
2	0.1723	37.11	20.15	57.26	64.85	-7.59	QP
3	0.2559	28.01	20.09	48.10	51.56	-3.46	Average
4	0.2559	30.70	20.09	50.79	61.56	-10.77	QP
5	0.3419	24.03	20.10	44.13	49.16	-5.03	Average
6	0.3419	28.13	20.10	48.23	59.16	-10.93	QP
7	0.4310	18.48	20.05	38.53	47.23	-8.70	Average
8	0.4310	22.62	20.05	42.67	57.23	-14.56	QP
9	0.5130	16.05	19.92	35.97	46.00	-10.03	Average
10	0.5130	20.53	19.92	40.45	56.00	-15.55	QP
11	0.6067	5.79	19.87	25.66	46.00	-20.34	Average
12	0.6067	17.04	19.87	36.91	56.00	-19.09	QP

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 15 of 244

7.2 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Measurement Distance: 3M

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.2.1 E.U.T. Operation


Operating Environment:

Temperature: °C Humidity: % RH Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and Only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

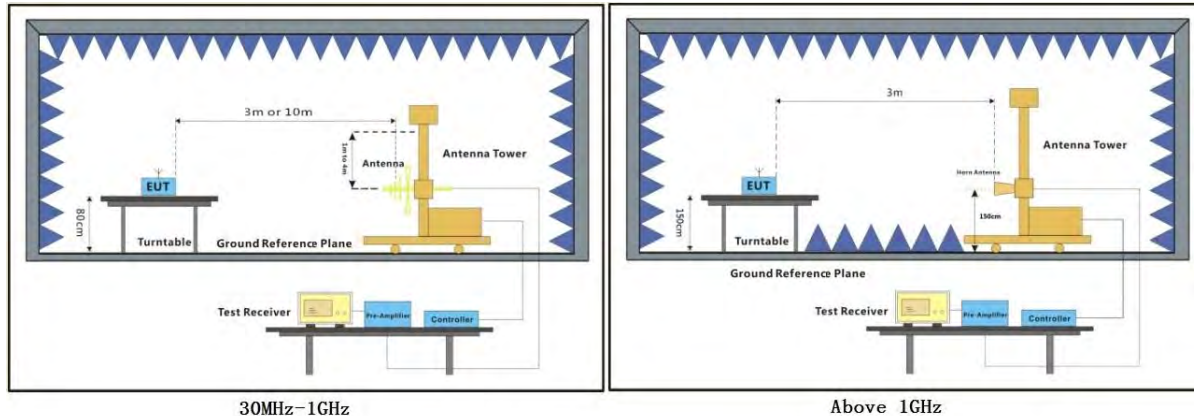

7.2.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 17 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

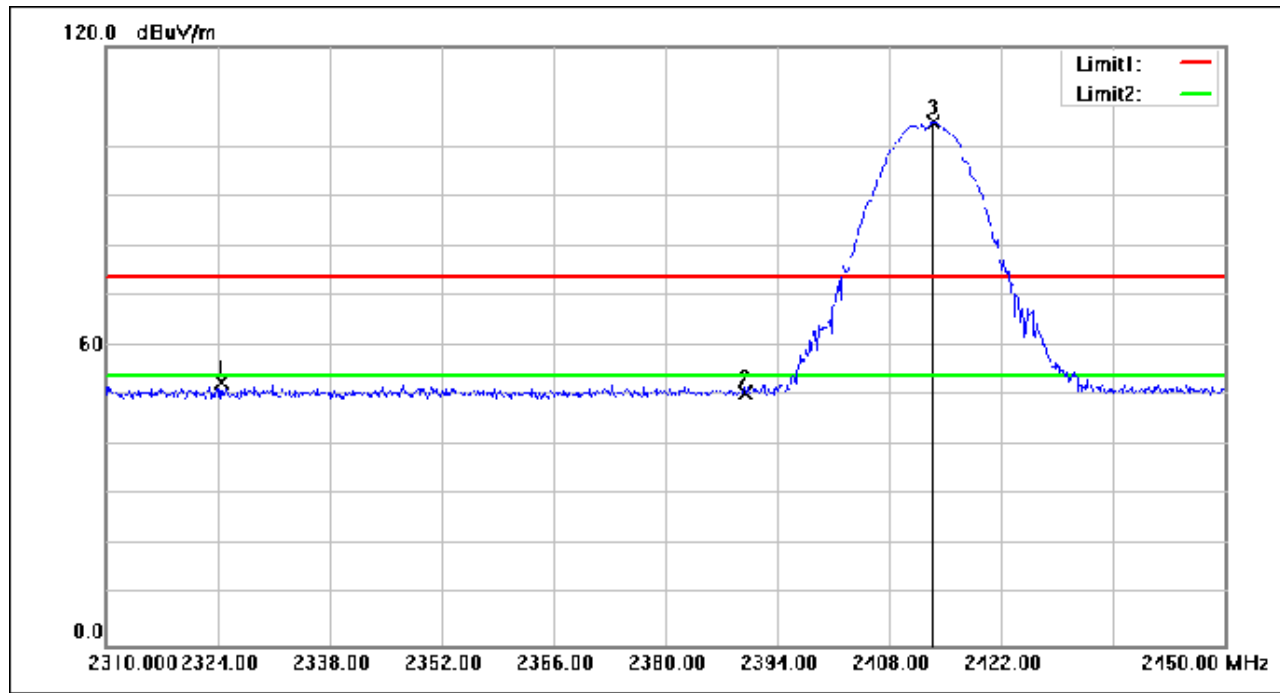

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2324.420	77.56	-24.99	52.57	74.00	-21.43	peak
2	2390.000	75.40	-24.71	50.69	74.00	-23.31	peak
3	2413.460	129.58	-24.60	104.98	74.00	30.98	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 18 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

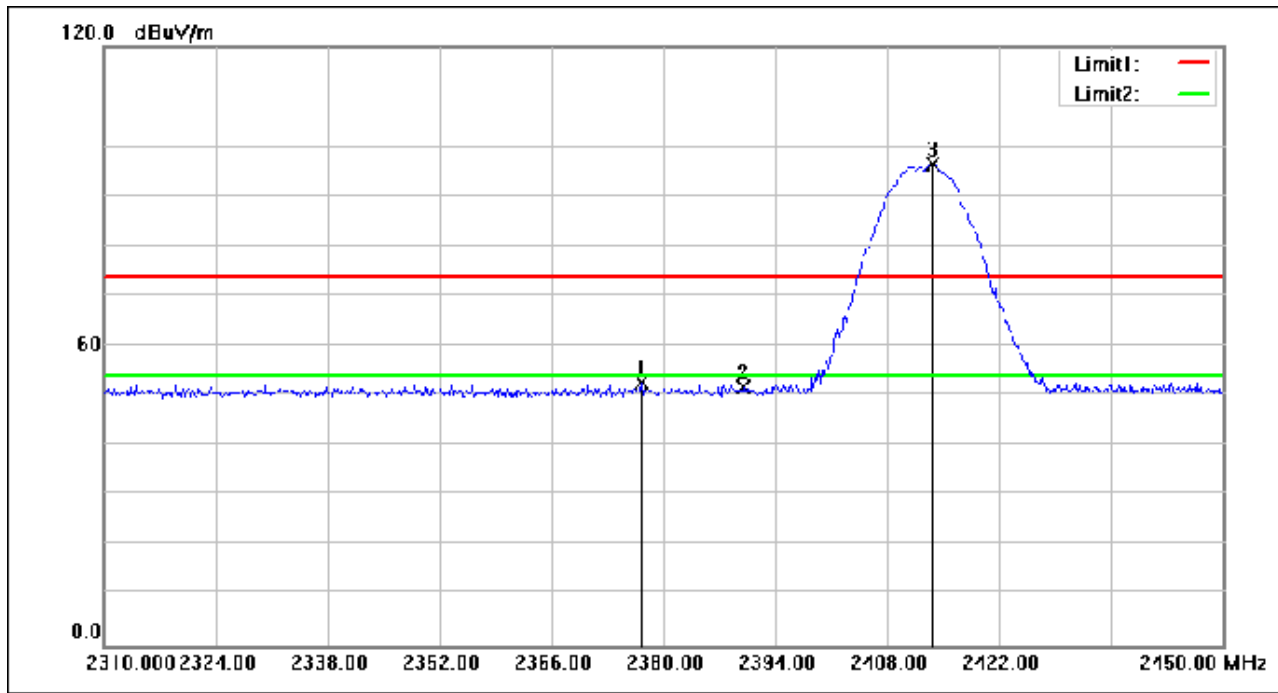

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2377.200	77.29	-24.77	52.52	74.00	-21.48	peak
2	2390.000	76.51	-24.71	51.80	74.00	-22.20	peak
3	2413.600	121.09	-24.59	96.50	74.00	22.50	peak

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 19 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High



No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.650	128.41	-24.38	104.03	74.00	30.03	peak
2	2483.500	75.40	-24.27	51.13	74.00	-22.87	peak
3	2496.200	76.72	-24.21	52.51	74.00	-21.49	peak
4	2500.000	76.08	-24.19	51.89	74.00	-22.11	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 20 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High

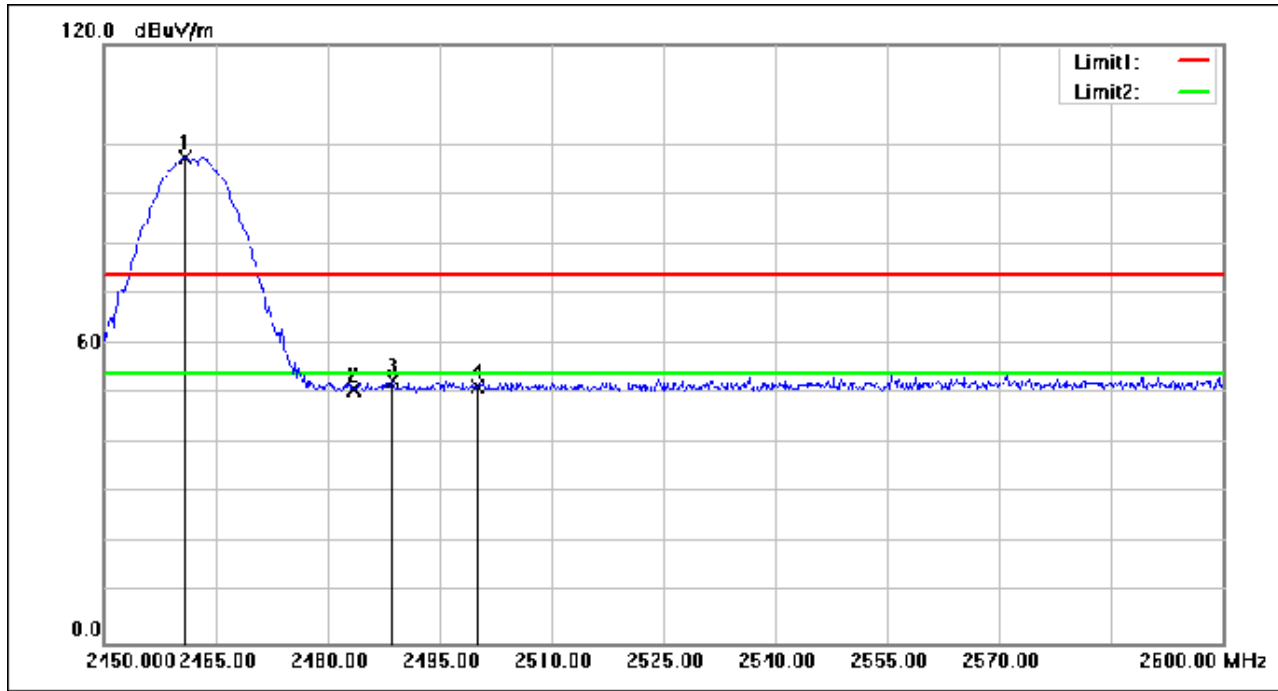

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.950	121.74	-24.38	97.36	74.00	23.36	peak
2	2483.500	75.25	-24.27	50.98	74.00	-23.02	peak
3	2488.700	77.01	-24.25	52.76	74.00	-21.24	peak
4	2500.000	75.78	-24.19	51.59	74.00	-22.41	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 21 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

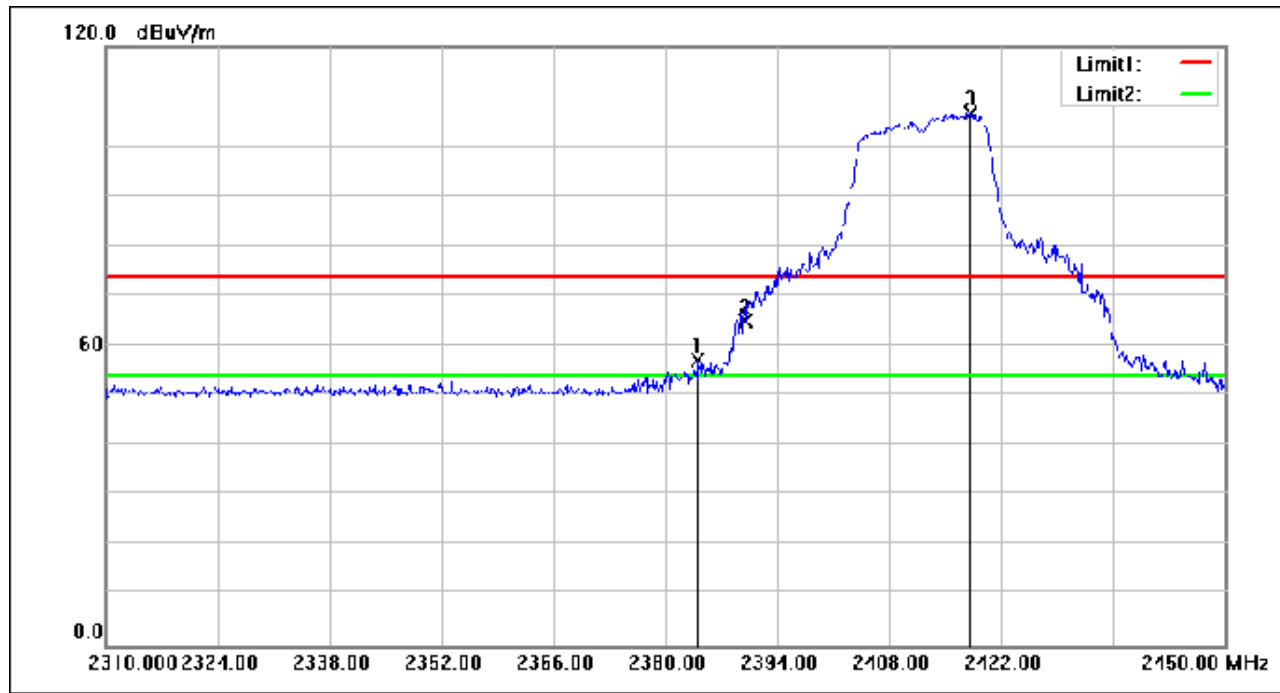

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.060	81.83	-24.73	57.10	74.00	-16.90	peak
2	2390.000	89.70	-24.71	64.99	74.00	-9.01	peak
3	2418.220	131.25	-24.58	106.67	74.00	32.67	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 22 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

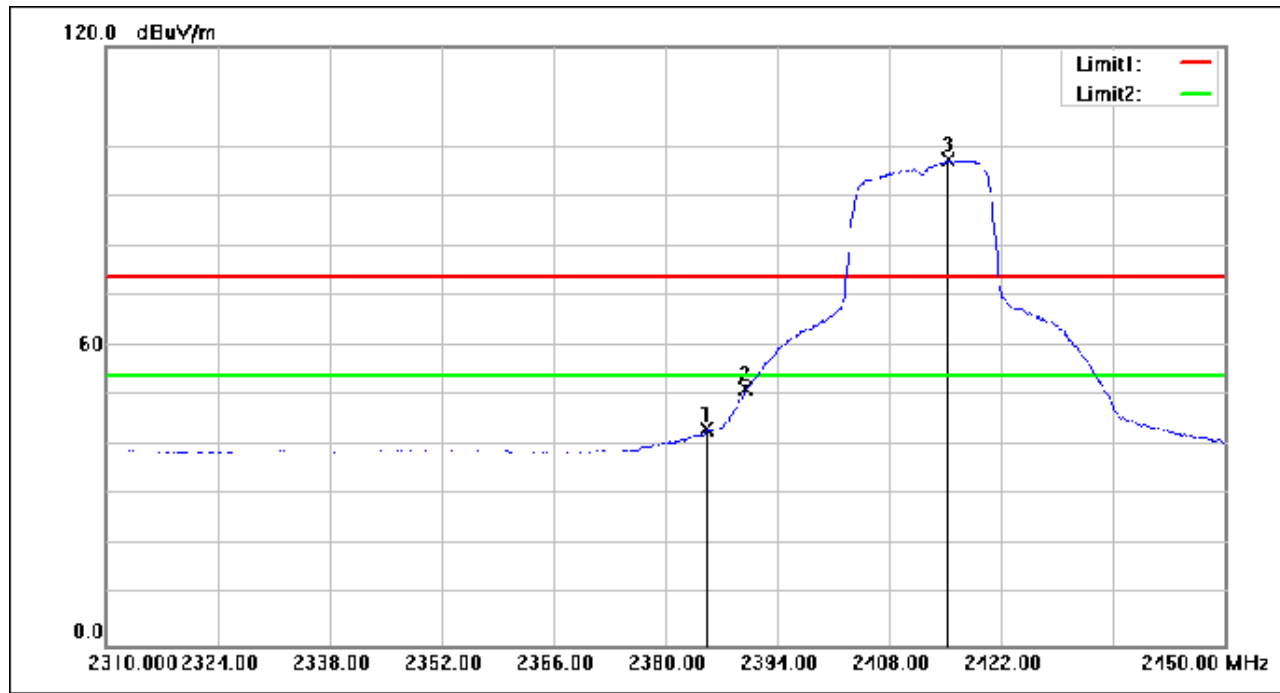

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.180	68.07	-24.73	43.34	54.00	-10.66	AVG
2	2390.000	76.13	-24.71	51.42	54.00	-2.58	AVG
3	2415.280	121.86	-24.59	97.27	54.00	43.27	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 23 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

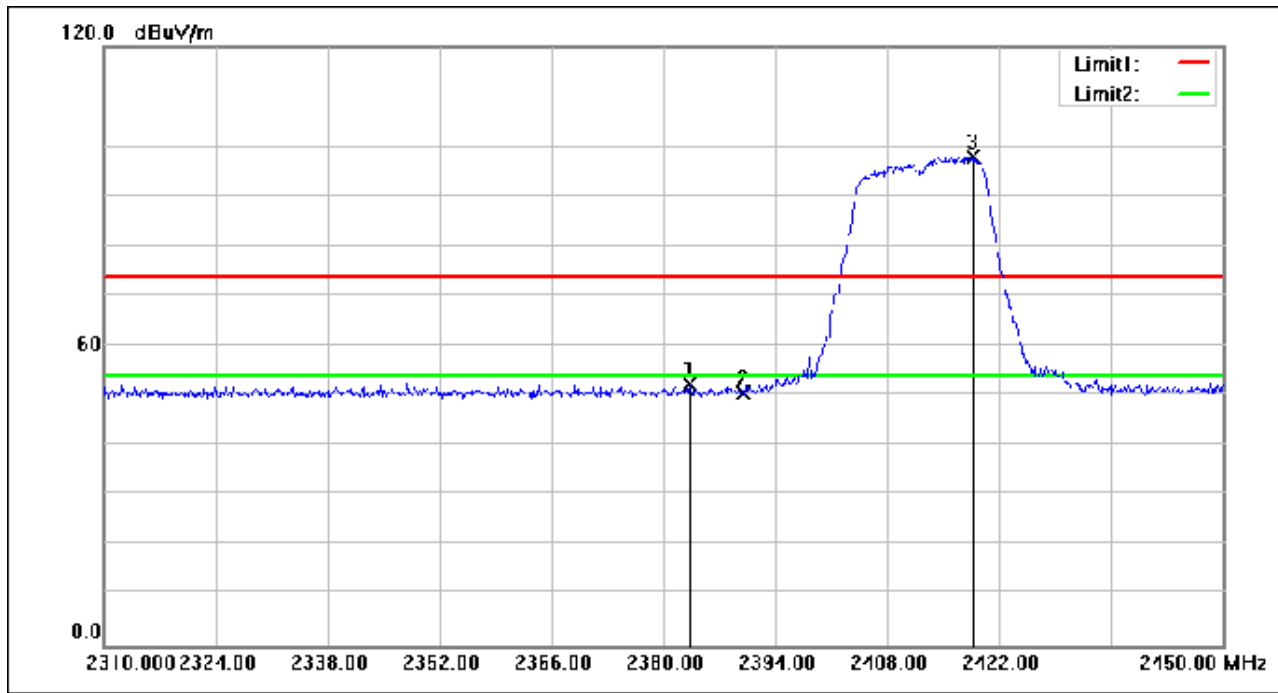

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2383.220	77.00	-24.74	52.26	74.00	-21.74	peak
2	2390.000	75.30	-24.71	50.59	74.00	-23.41	peak
3	2418.640	122.56	-24.57	97.99	74.00	23.99	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 24 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:High

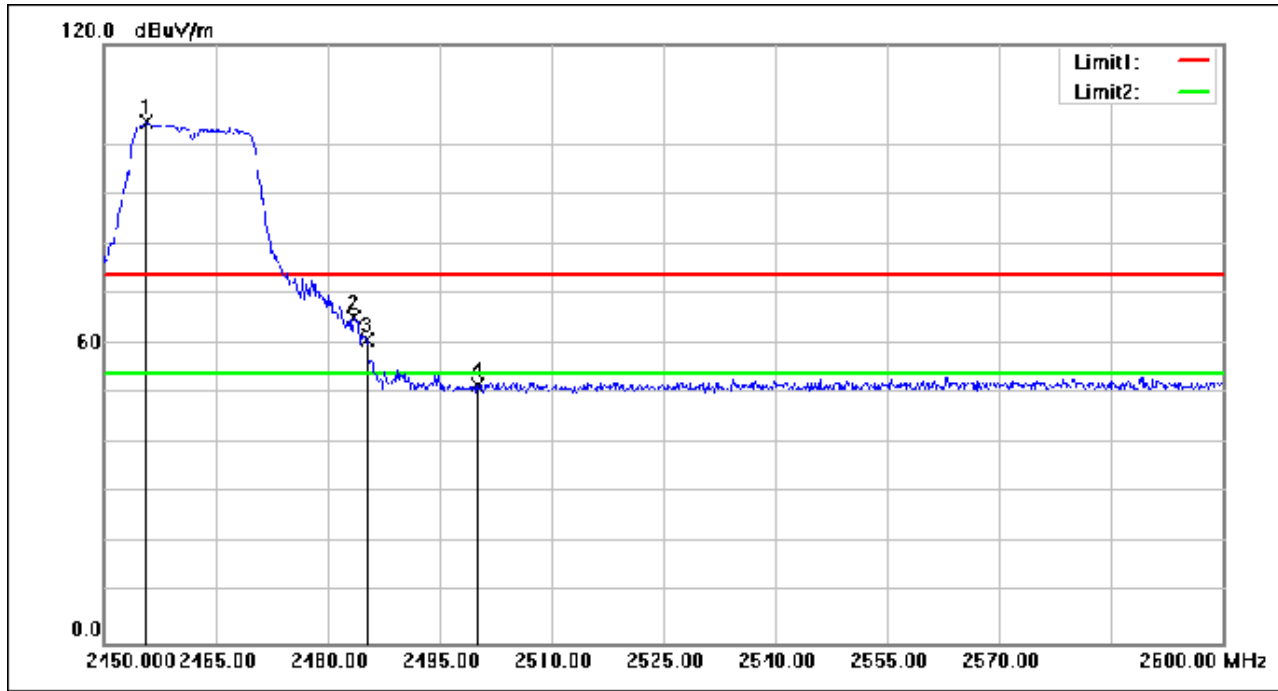

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2455.700	128.81	-24.40	104.41	74.00	30.41	peak
2	2483.500	89.65	-24.27	65.38	74.00	-8.62	peak
3	2485.250	85.11	-24.26	60.85	74.00	-13.15	peak
4	2500.000	75.85	-24.19	51.66	74.00	-22.34	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 25 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:High

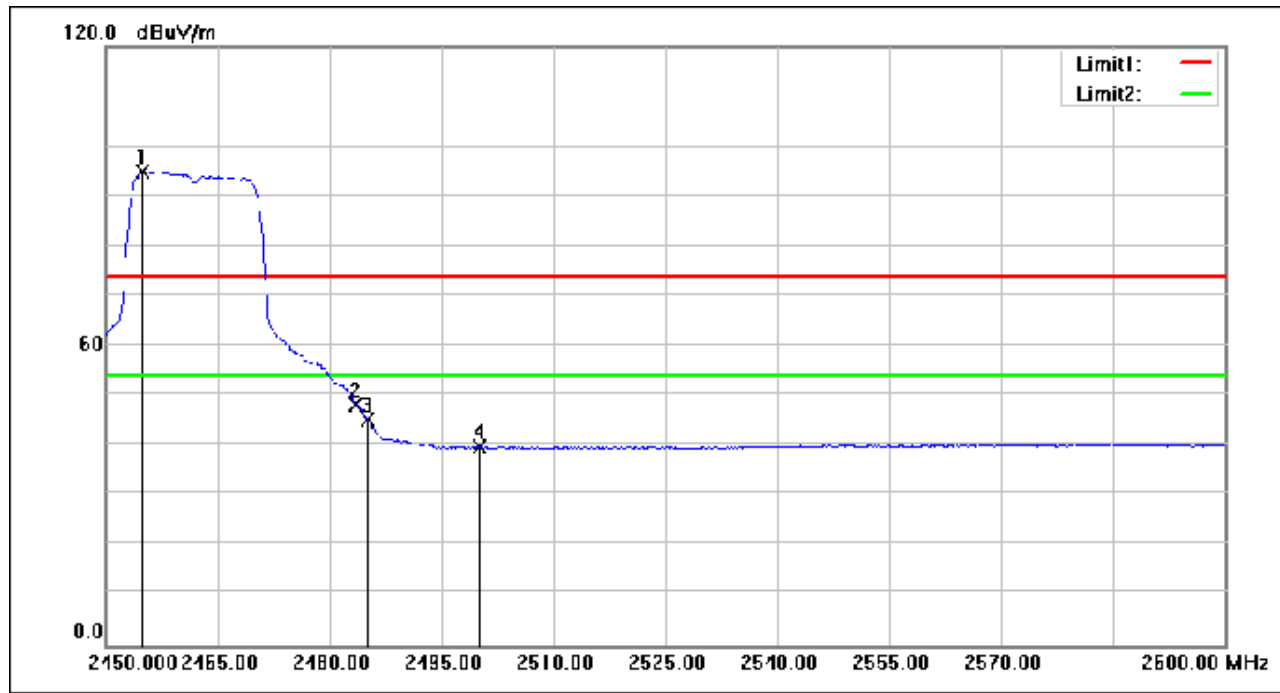

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2454.950	119.38	-24.40	94.98	54.00	40.98	AVG
2	2483.500	72.48	-24.27	48.21	54.00	-5.79	AVG
3	2485.100	69.54	-24.26	45.28	54.00	-8.72	AVG
4	2500.000	63.98	-24.19	39.79	54.00	-14.21	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 26 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:High

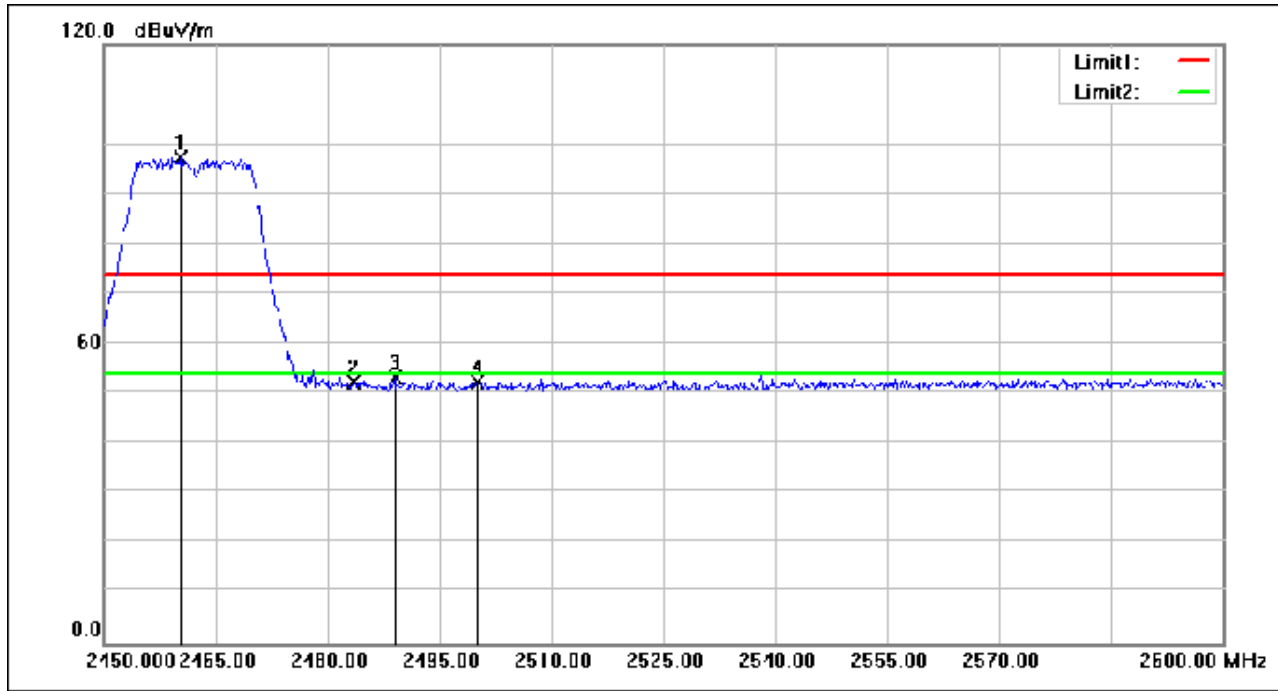

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.200	121.61	-24.38	97.23	74.00	23.23	peak
2	2483.500	76.55	-24.27	52.28	74.00	-21.72	peak
3	2489.000	77.48	-24.24	53.24	74.00	-20.76	peak
4	2500.000	76.39	-24.19	52.20	74.00	-21.80	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 27 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

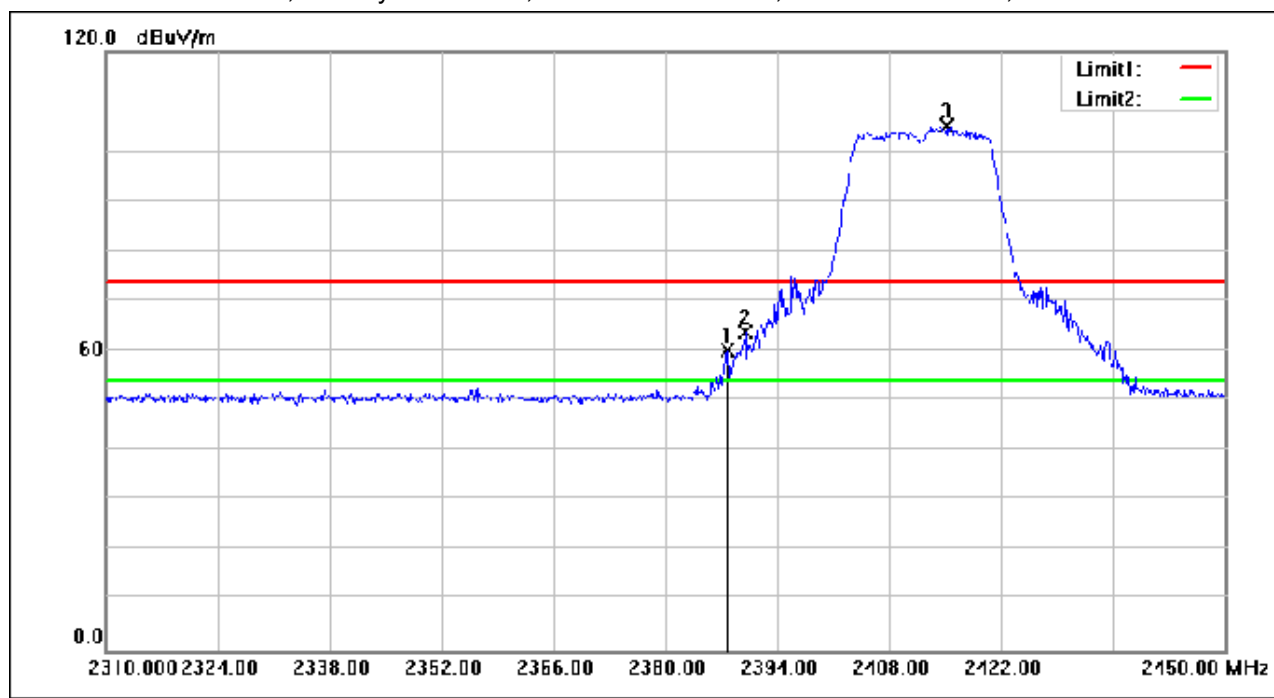

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.700	84.89	-24.72	60.17	74.00	-13.83	peak
2	2390.000	88.45	-24.71	63.74	74.00	-10.26	peak
3	2415.140	129.67	-24.59	105.08	74.00	31.08	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 28 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

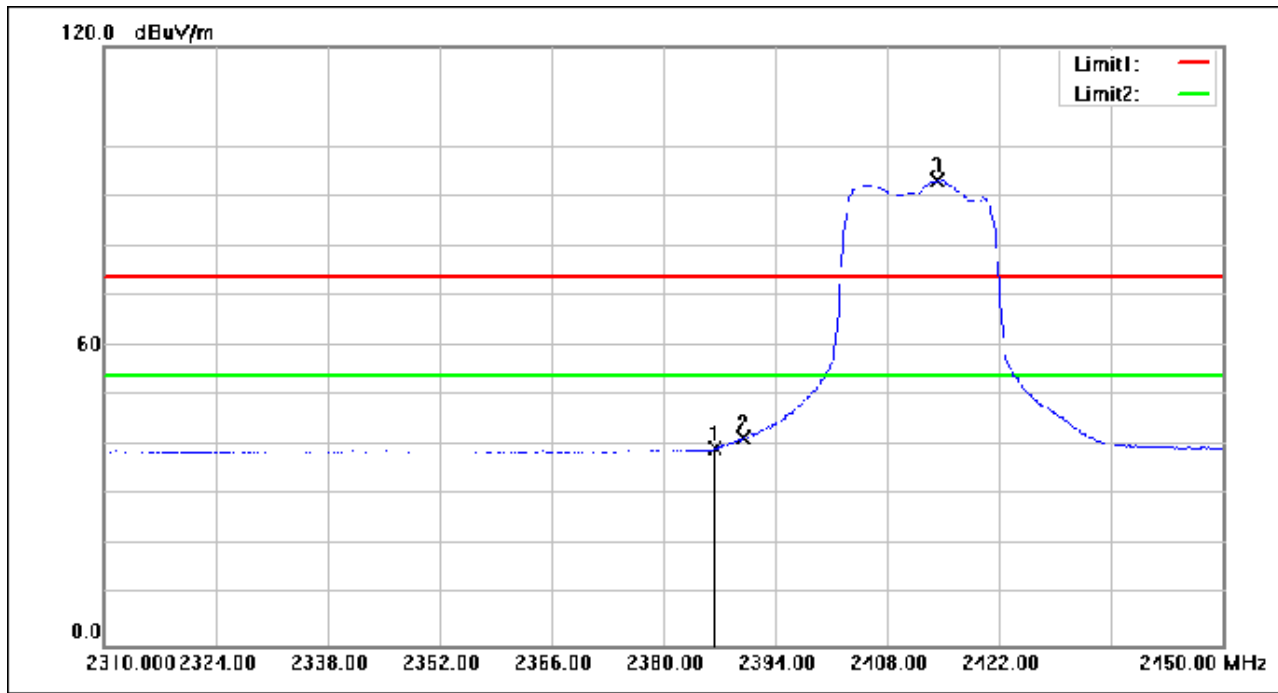

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.440	64.26	-24.72	39.54	54.00	-14.46	AVG
2	2390.000	66.21	-24.71	41.50	54.00	-12.50	AVG
3	2414.300	117.83	-24.59	93.24	54.00	39.24	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 29 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

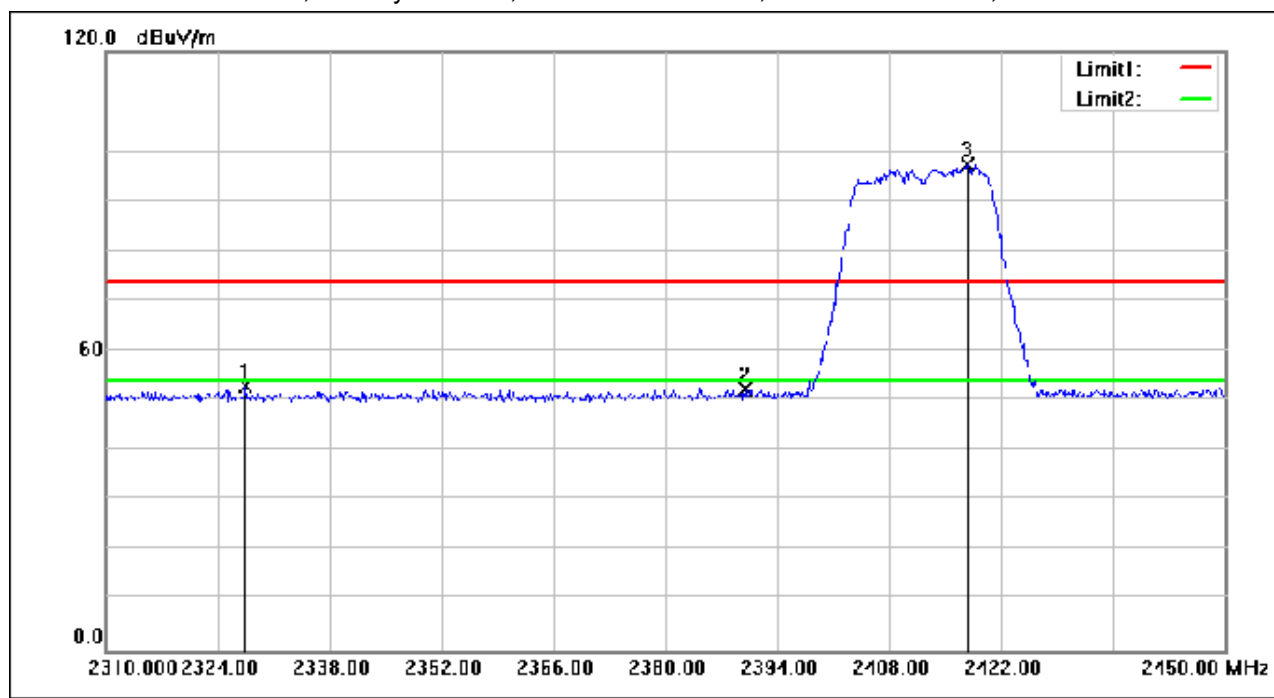

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2327.500	77.85	-24.98	52.87	74.00	-21.13	peak
2	2390.000	76.93	-24.71	52.22	74.00	-21.78	peak
3	2417.800	121.93	-24.58	97.35	74.00	23.35	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 30 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

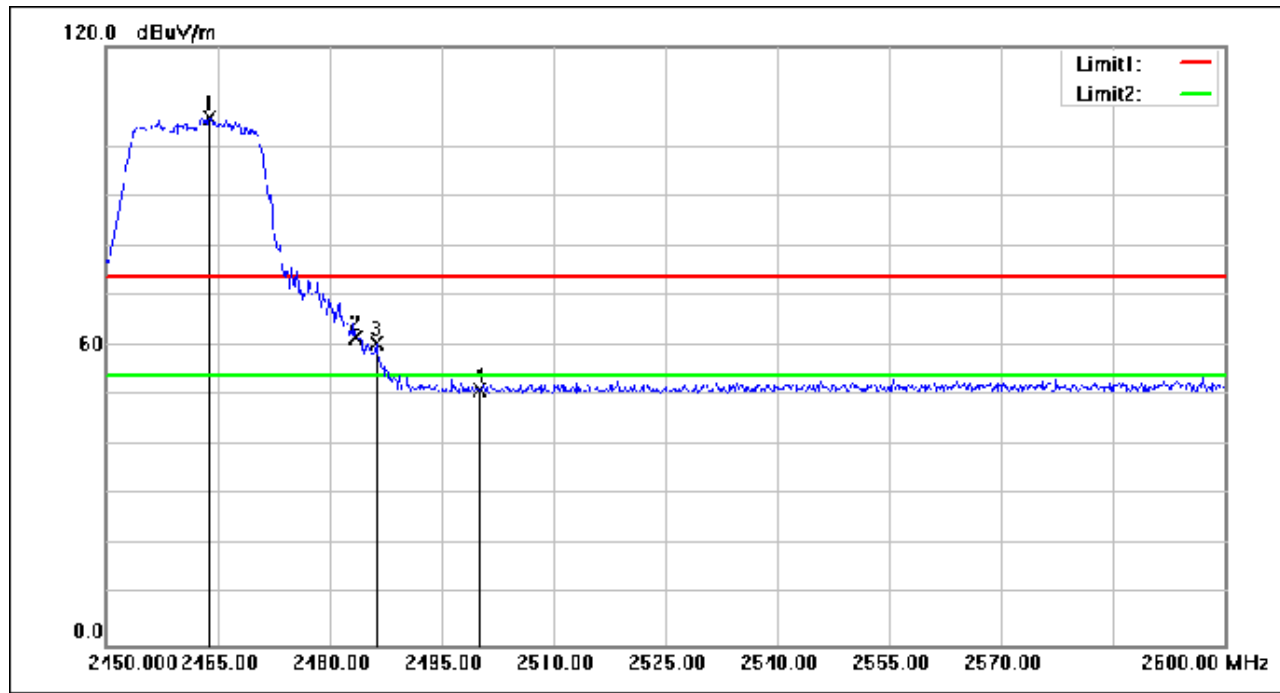

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.950	130.18	-24.36	105.82	74.00	31.82	peak
2	2483.500	85.94	-24.27	61.67	74.00	-12.33	peak
3	2486.300	84.64	-24.25	60.39	74.00	-13.61	peak
4	2500.000	75.35	-24.19	51.16	74.00	-22.84	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 31 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

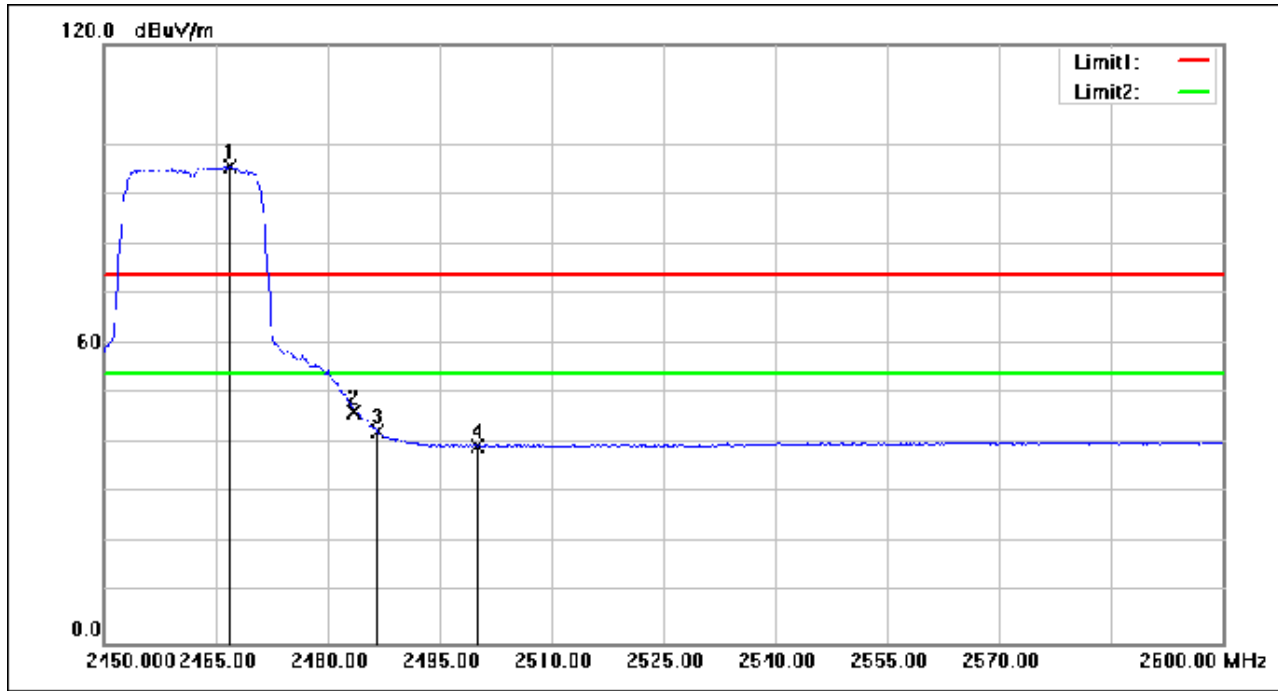

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2466.950	119.85	-24.34	95.51	54.00	41.51	AVG
2	2483.500	70.74	-24.27	46.47	54.00	-7.53	AVG
3	2486.750	66.56	-24.25	42.31	54.00	-11.69	AVG
4	2500.000	63.78	-24.19	39.59	54.00	-14.41	AVG

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 32 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High



No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.050	122.49	-24.37	98.12	74.00	24.12	peak
2	2483.500	75.57	-24.27	51.30	74.00	-22.70	peak
3	2496.350	77.23	-24.20	53.03	74.00	-20.97	peak
4	2500.000	75.11	-24.19	50.92	74.00	-23.08	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 33 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

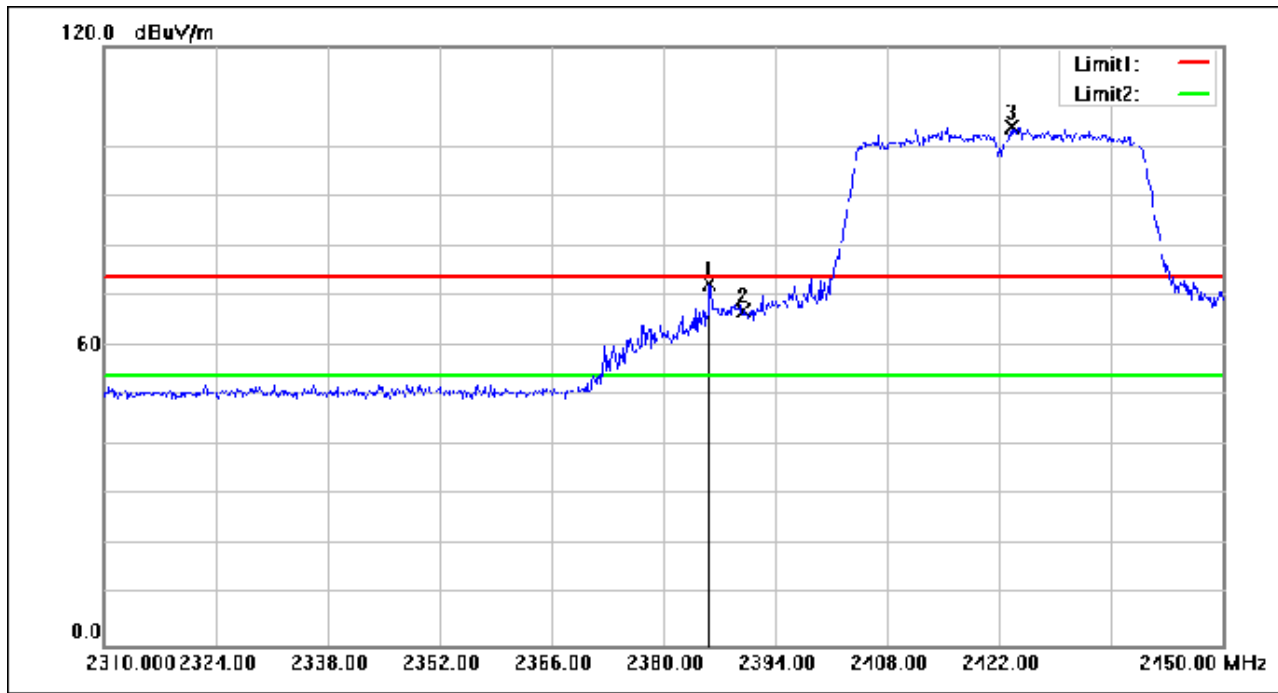

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.740	97.09	-24.73	72.36	74.00	-1.64	peak
2	2390.000	91.87	-24.71	67.16	74.00	-6.84	peak
3	2423.540	128.41	-24.54	103.87	74.00	29.87	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 34 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

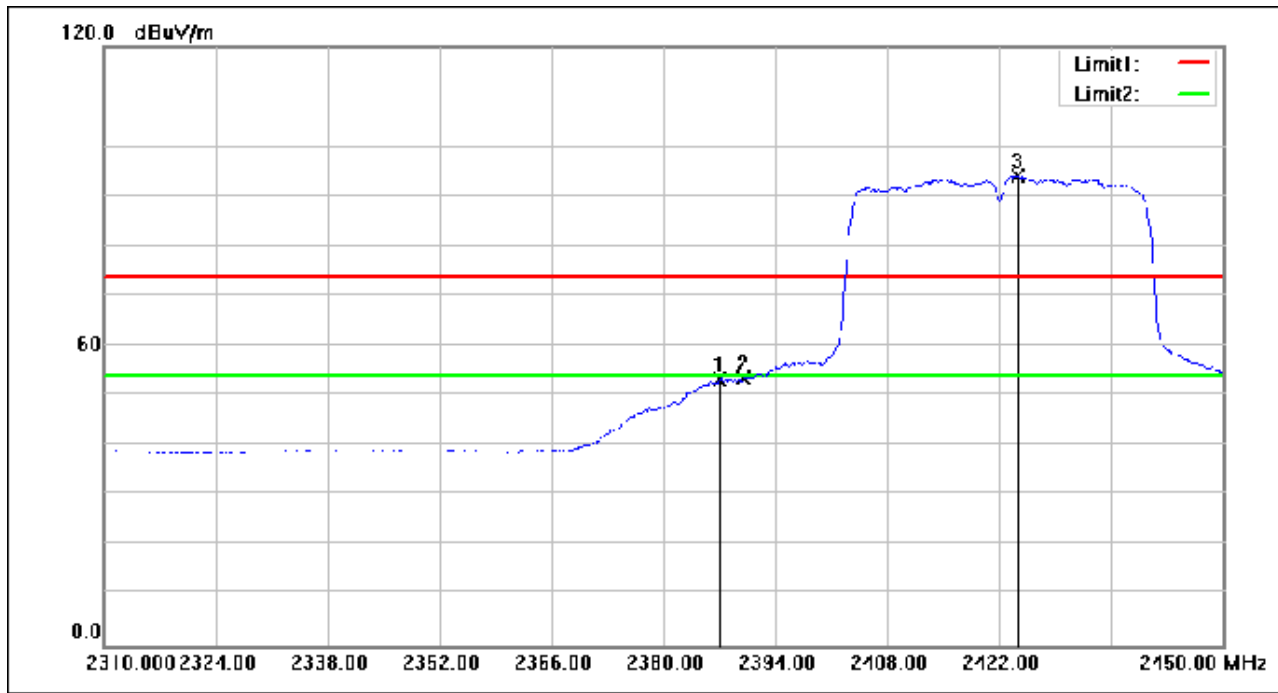

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.000	78.00	-24.72	53.28	54.00	-0.72	AVG
2	2390.000	78.27	-24.71	53.56	54.00	-0.44	AVG
3	2424.240	118.69	-24.54	94.15	54.00	40.15	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 35 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

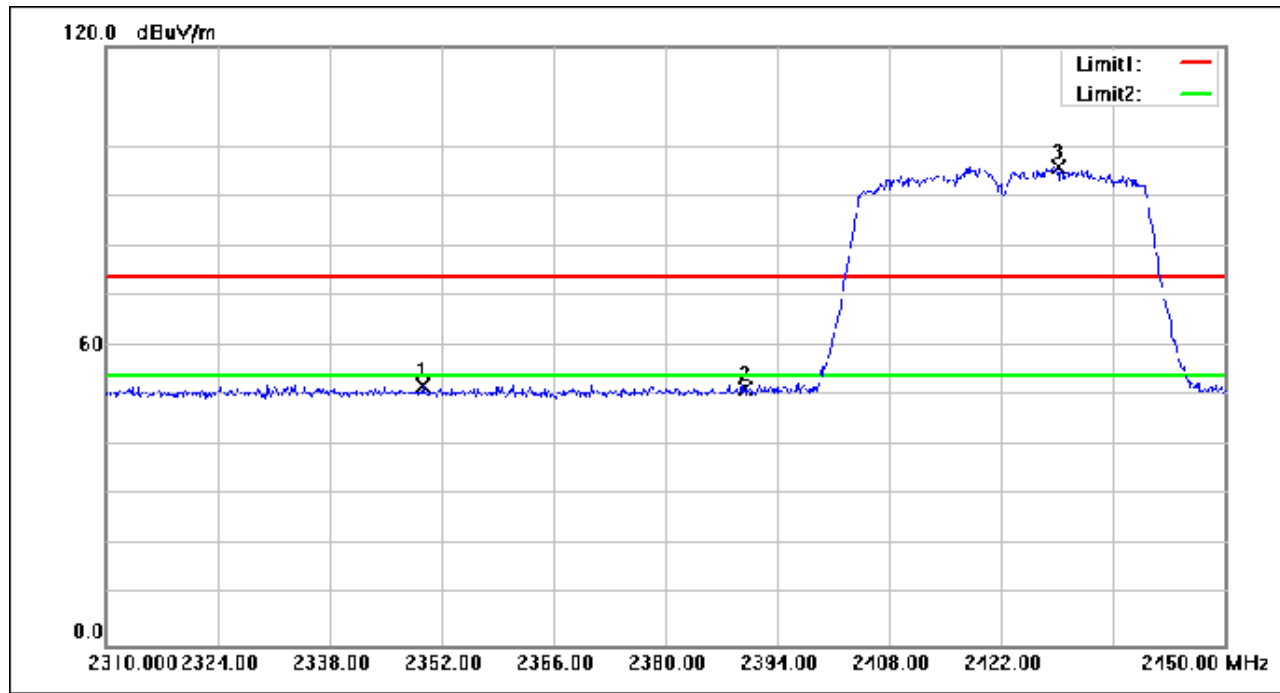

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2349.620	76.82	-24.89	51.93	74.00	-22.07	peak
2	2390.000	76.31	-24.71	51.60	74.00	-22.40	peak
3	2429.140	120.42	-24.52	95.90	74.00	21.90	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 36 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

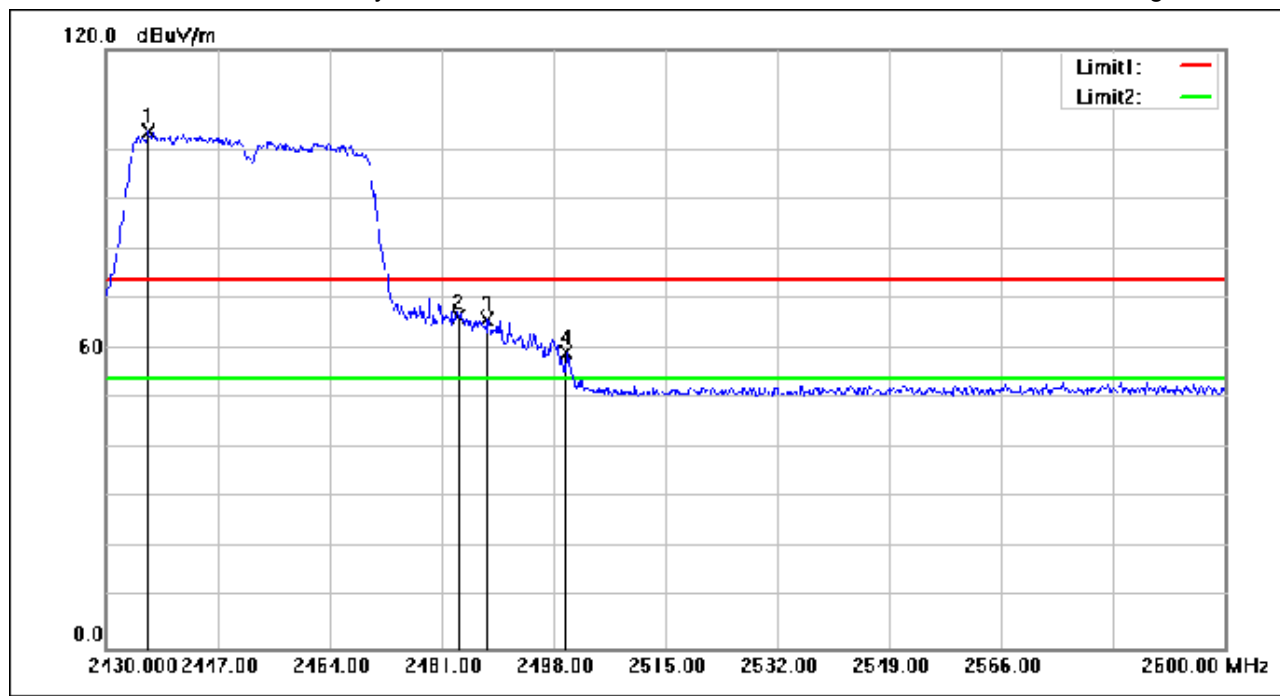

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2436.460	128.25	-24.48	103.77	74.00	29.77	peak
2	2483.500	90.83	-24.27	66.56	74.00	-7.44	peak
3	2487.970	90.05	-24.25	65.80	74.00	-8.20	peak
4	2500.000	83.58	-24.19	59.39	74.00	-14.61	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 37 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

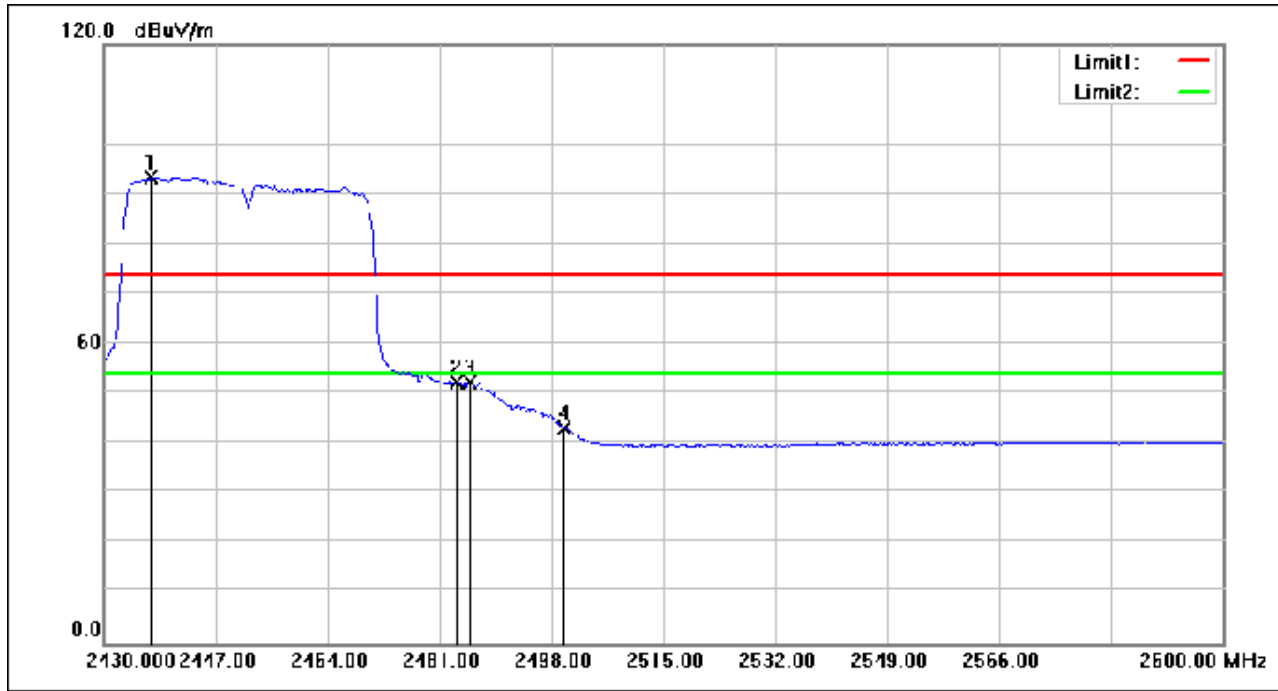

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2437.140	117.79	-24.48	93.31	54.00	39.31	AVG
2	2483.500	76.73	-24.27	52.46	54.00	-1.54	AVG
3	2485.590	76.57	-24.26	52.31	54.00	-1.69	AVG
4	2500.000	67.21	-24.19	43.02	54.00	-10.98	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 38 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

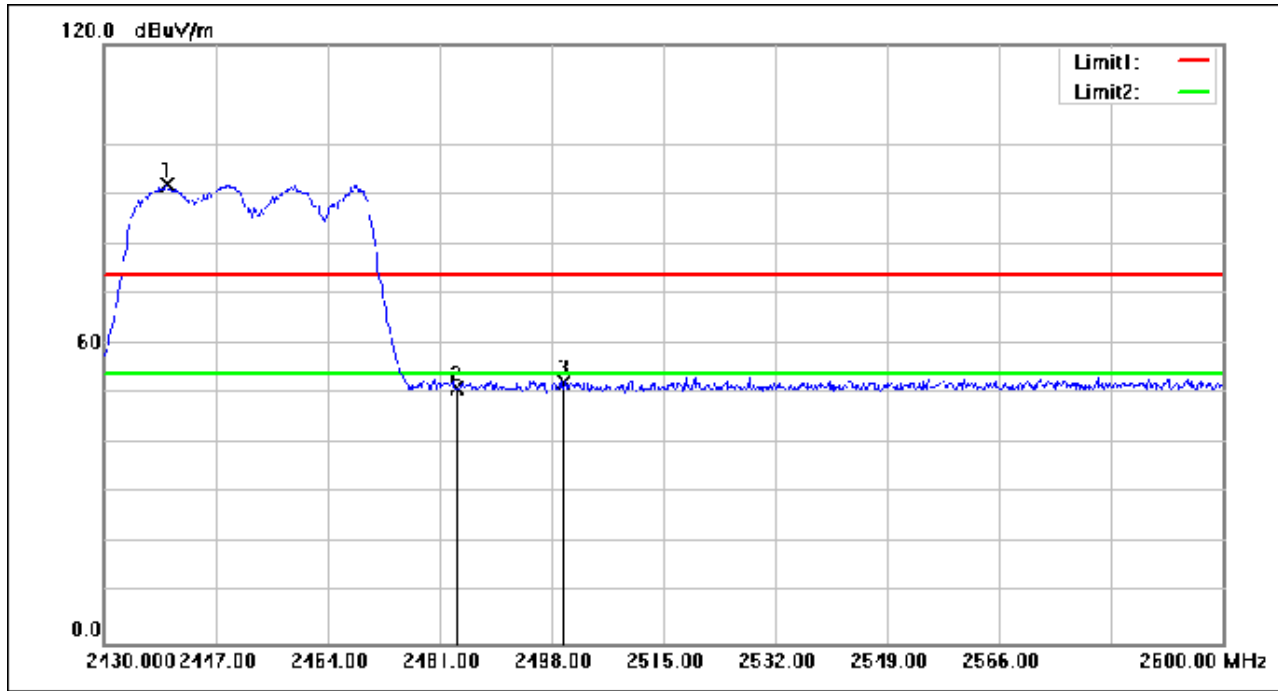

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2439.520	116.40	-24.47	91.93	74.00	17.93	peak
2	2483.500	75.30	-24.27	51.03	74.00	-22.97	peak
3	2500.000	76.68	-24.19	52.49	74.00	-21.51	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 39 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

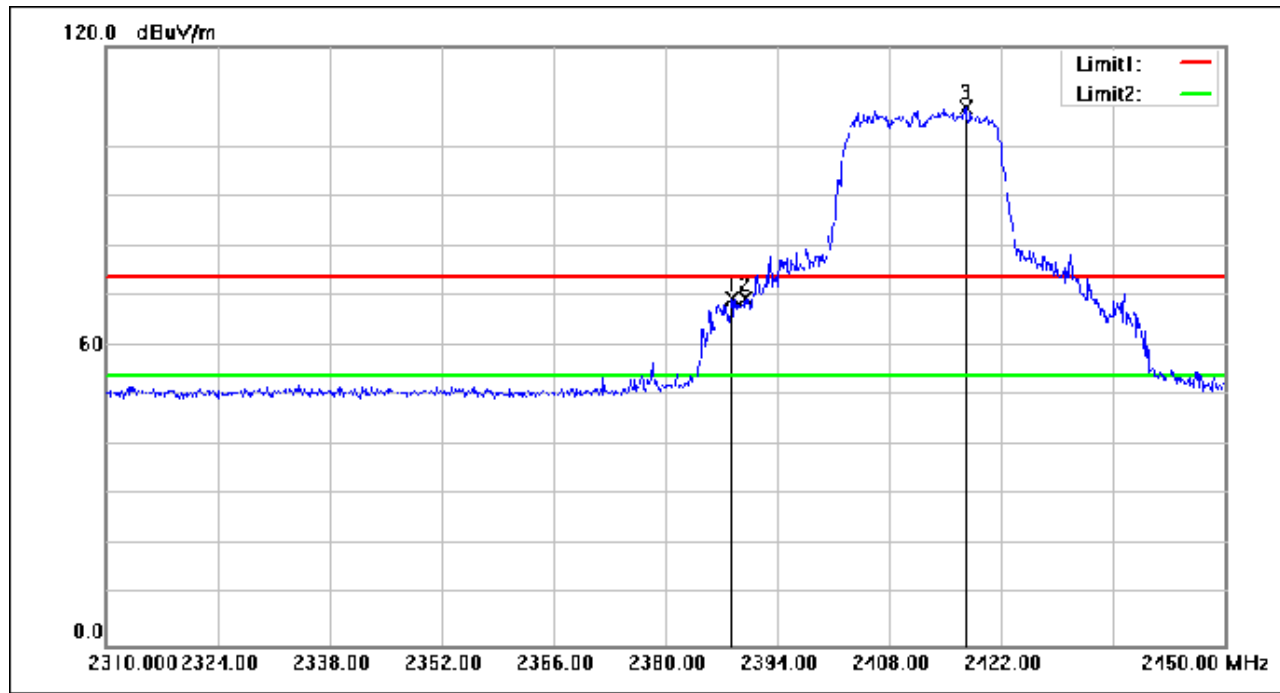

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.260	94.31	-24.72	69.59	74.00	-4.41	peak
2	2390.000	94.16	-24.71	69.45	74.00	-4.55	peak
3	2417.520	132.50	-24.58	107.92	74.00	33.92	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 40 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

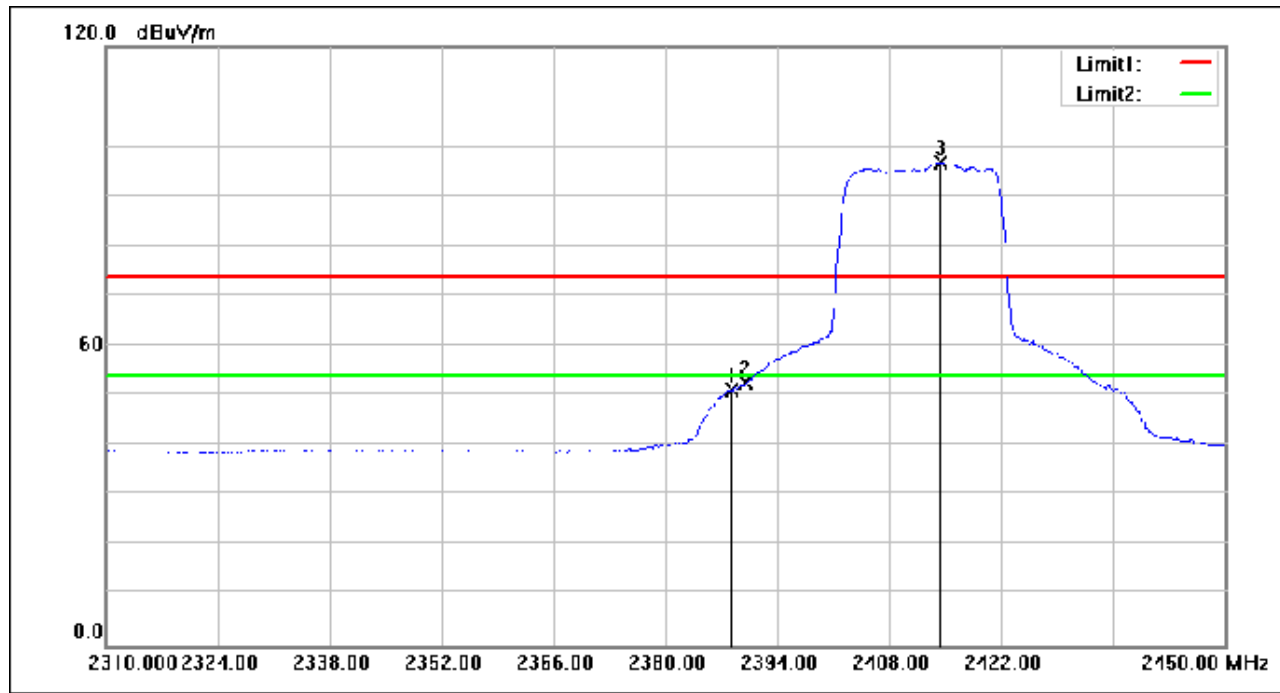

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.260	76.00	-24.72	51.28	54.00	-2.72	AVG
2	2390.000	77.42	-24.71	52.71	54.00	-1.29	AVG
3	2414.440	121.29	-24.59	96.70	54.00	42.70	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 41 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

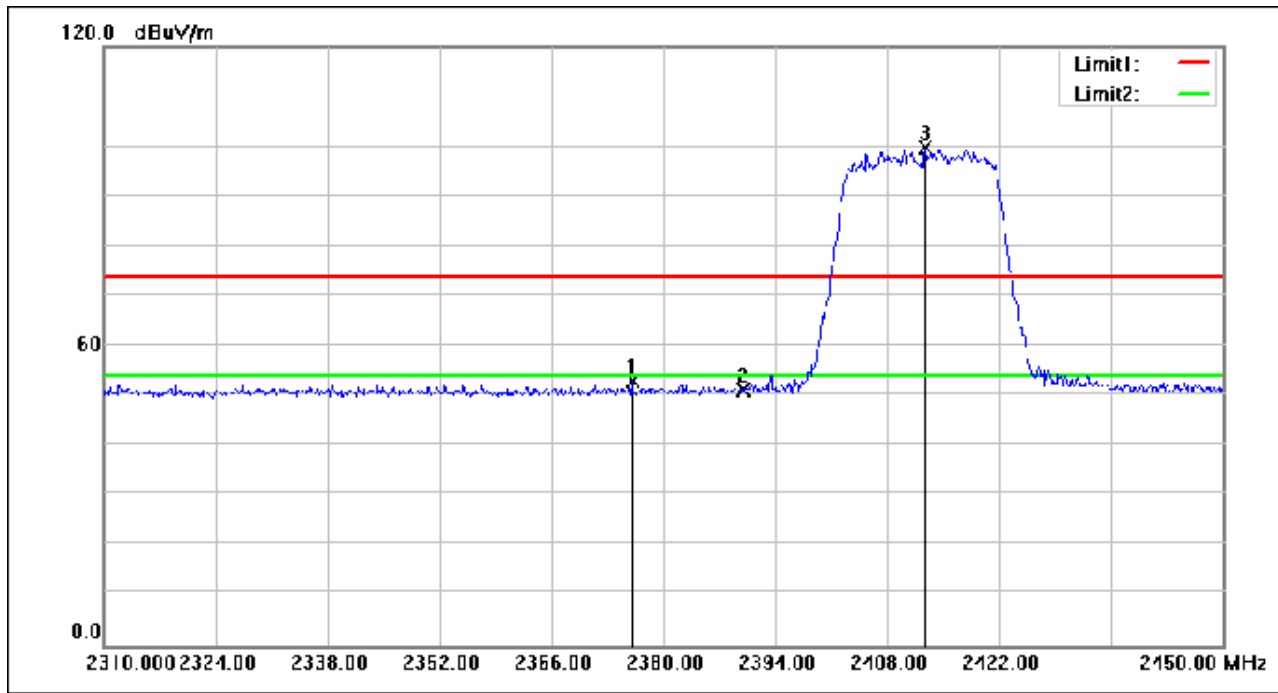

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2376.080	77.84	-24.77	53.07	74.00	-20.93	peak
2	2390.000	76.01	-24.71	51.30	74.00	-22.70	peak
3	2412.760	124.25	-24.60	99.65	74.00	25.65	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 42 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

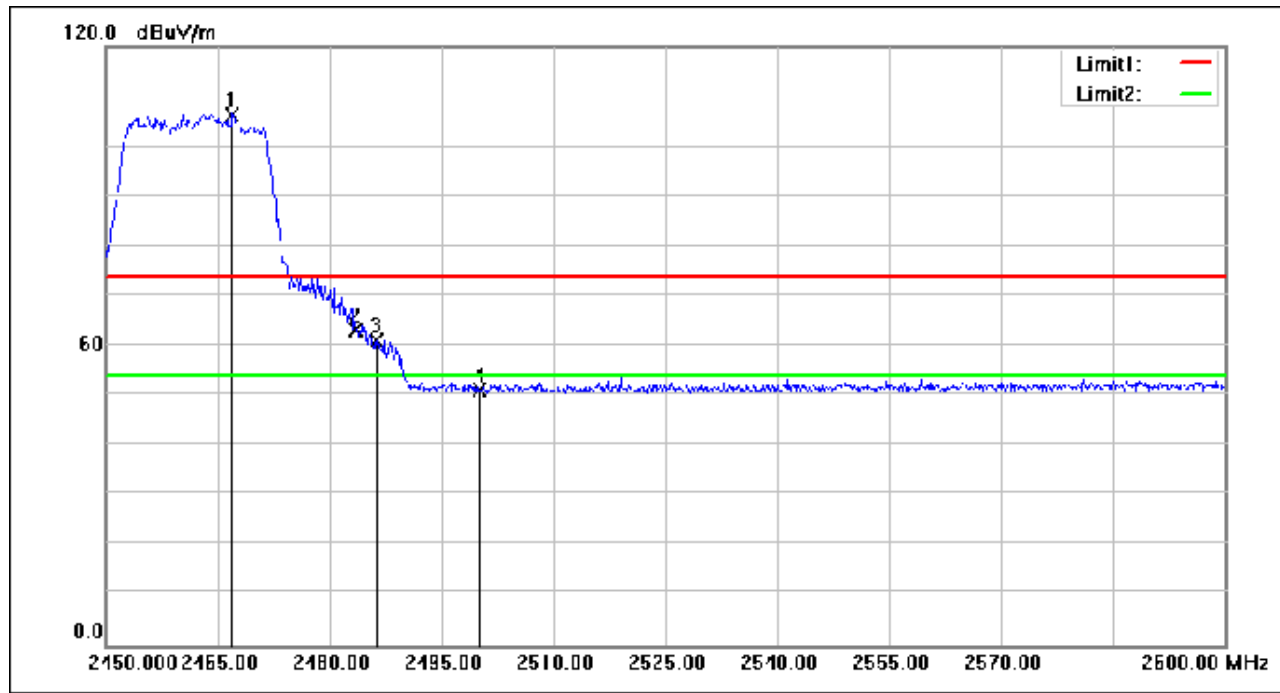

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2466.950	130.84	-24.34	106.50	74.00	32.50	peak
2	2483.500	87.47	-24.27	63.20	74.00	-10.80	peak
3	2486.300	85.26	-24.25	61.01	74.00	-12.99	peak
4	2500.000	75.31	-24.19	51.12	74.00	-22.88	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 43 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

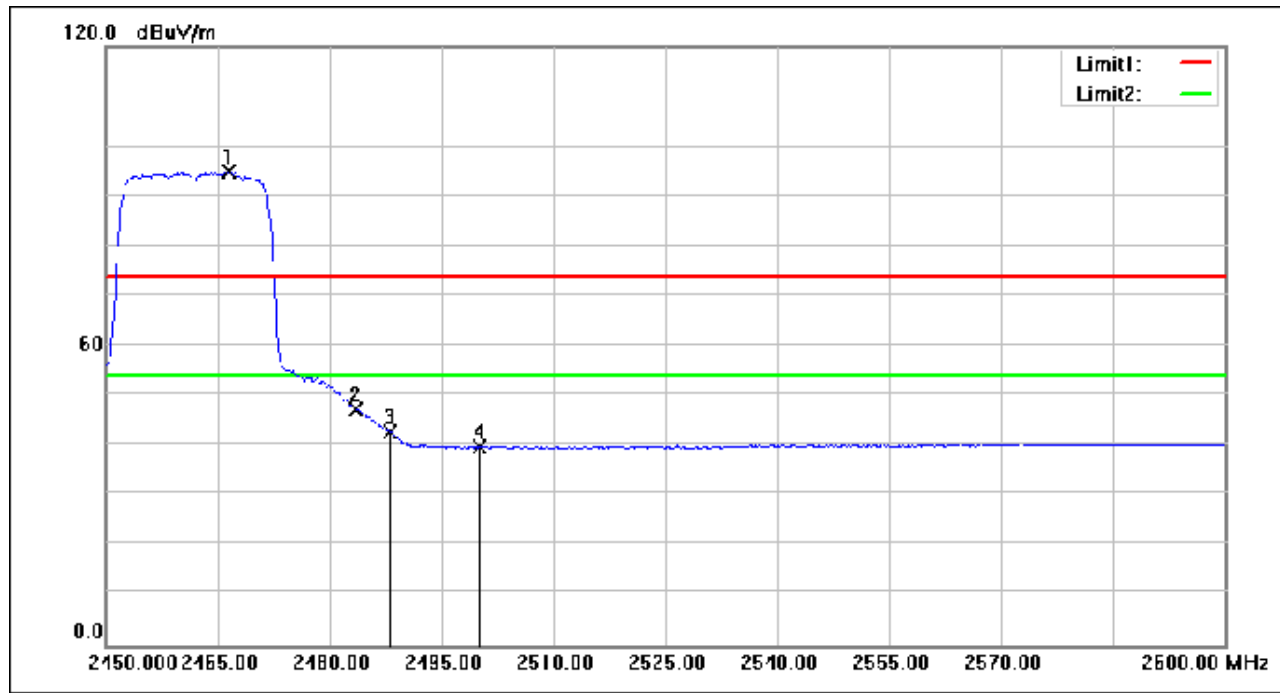

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2466.500	119.26	-24.34	94.92	54.00	40.92	AVG
2	2483.500	71.52	-24.27	47.25	54.00	-6.75	AVG
3	2488.100	66.99	-24.25	42.74	54.00	-11.26	AVG
4	2500.000	63.88	-24.19	39.69	54.00	-14.31	AVG

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 44 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High



No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2464.250	123.62	-24.36	99.26	74.00	25.26	peak
2	2483.500	75.83	-24.27	51.56	74.00	-22.44	peak
3	2496.200	77.27	-24.21	53.06	74.00	-20.94	peak
4	2500.000	75.82	-24.19	51.63	74.00	-22.37	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 45 of 244

Test Mode: 04; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: Low

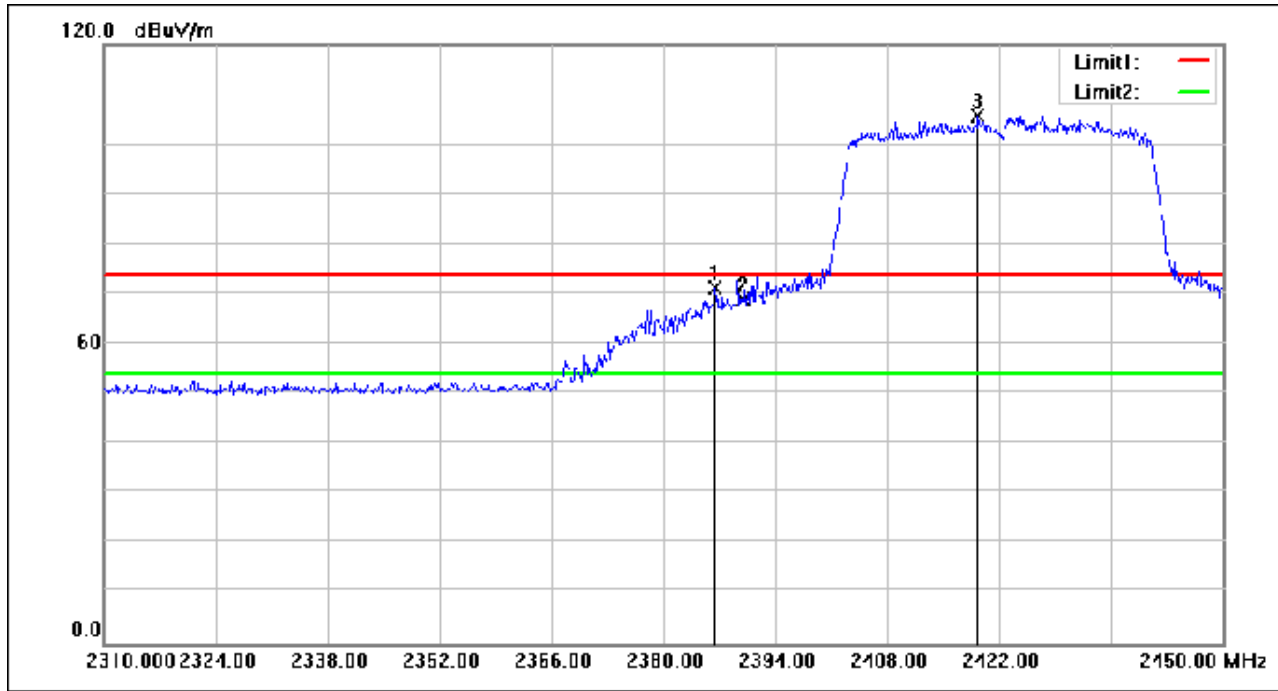

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.440	95.94	-24.72	71.22	74.00	-2.78	peak
2	2390.000	93.51	-24.71	68.80	74.00	-5.20	peak
3	2419.340	130.46	-24.57	105.89	74.00	31.89	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 46 of 244

Test Mode: 04; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: Low

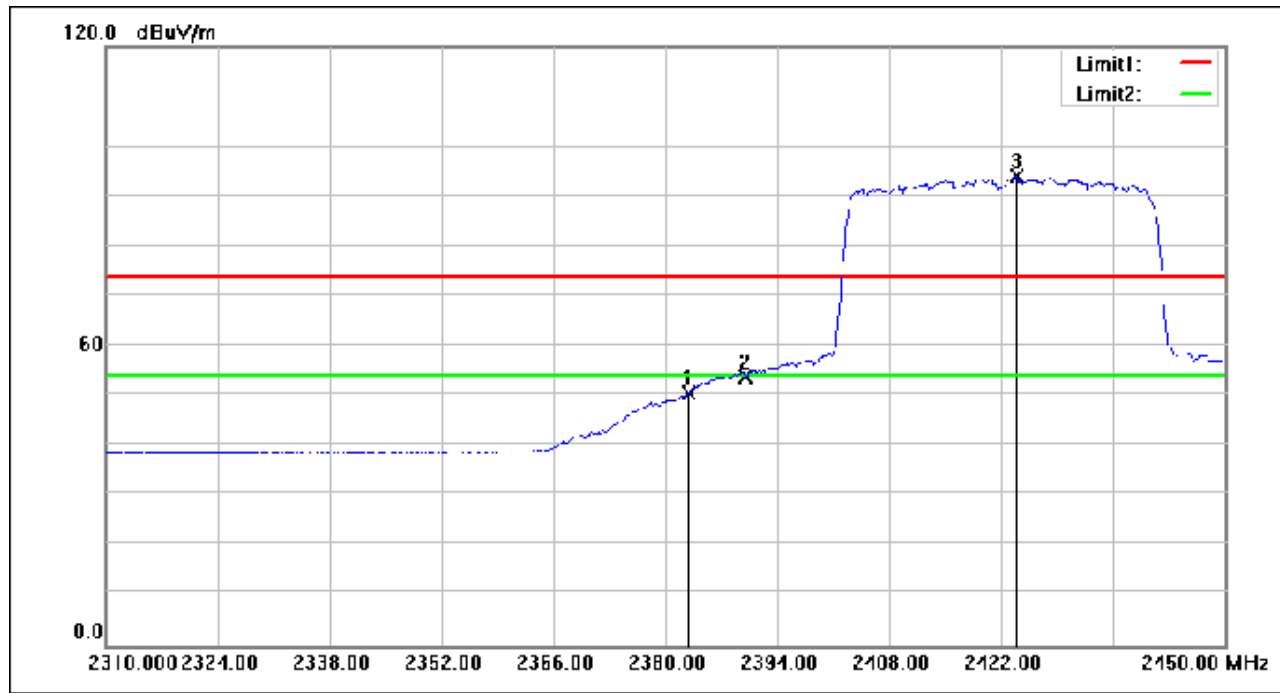

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2382.940	75.34	-24.74	50.60	54.00	-3.40	AVG
2	2390.000	78.60	-24.71	53.89	54.00	-0.11	AVG
3	2423.960	118.56	-24.54	94.02	54.00	40.02	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 47 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

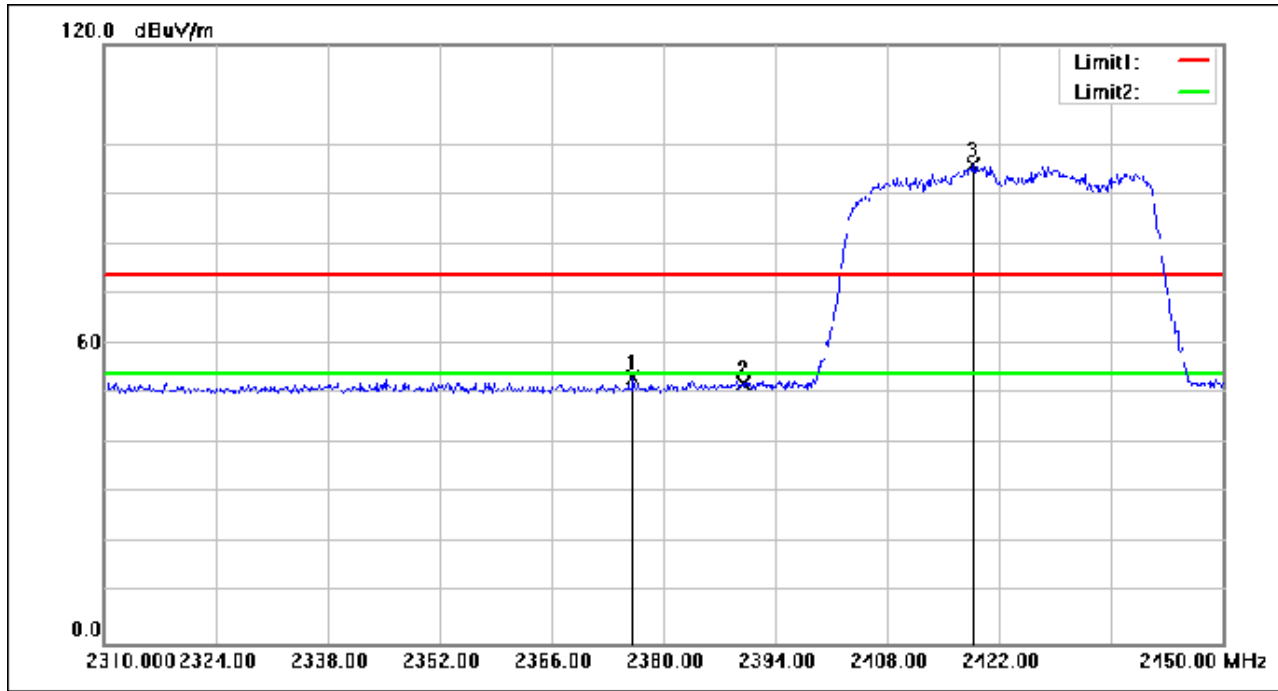

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2376.220	77.95	-24.77	53.18	74.00	-20.82	peak
2	2390.000	76.89	-24.71	52.18	74.00	-21.82	peak
3	2418.640	120.35	-24.57	95.78	74.00	21.78	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 48 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

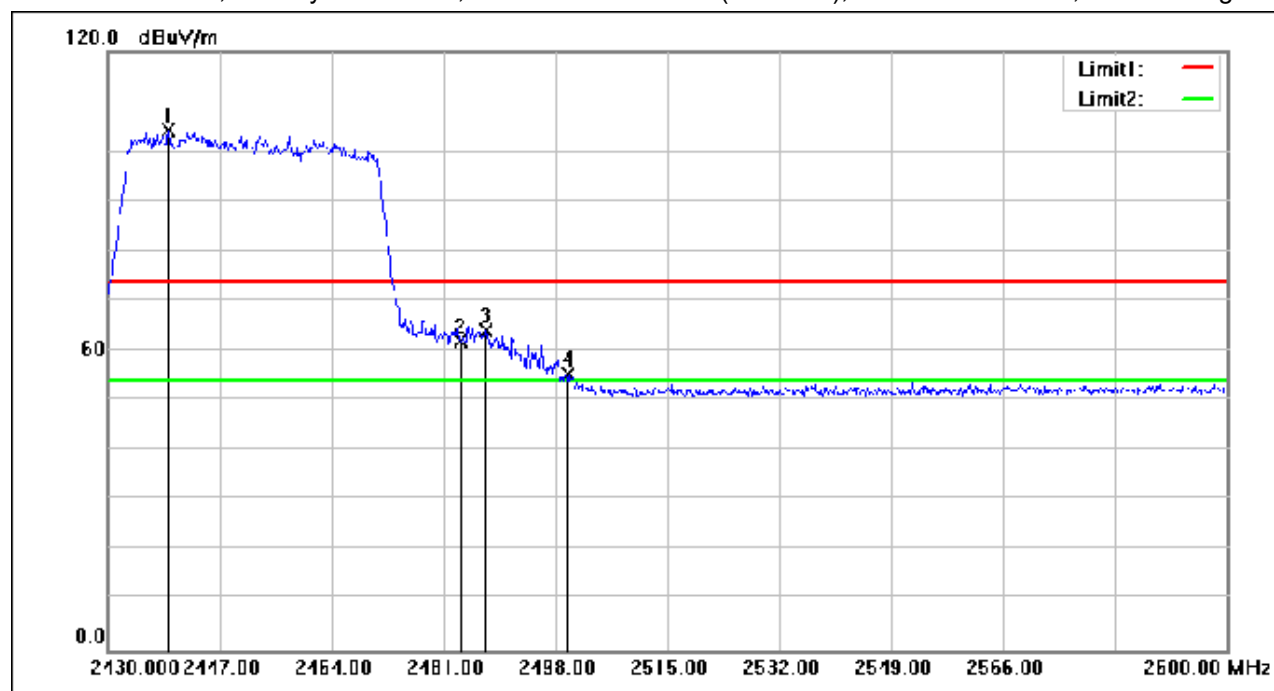

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2439.180	128.77	-24.47	104.30	74.00	30.30	peak
2	2483.500	86.09	-24.27	61.82	74.00	-12.18	peak
3	2487.460	88.26	-24.25	64.01	74.00	-9.99	peak
4	2500.000	79.41	-24.19	55.22	74.00	-18.78	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 49 of 244

Test Mode: 04; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: High

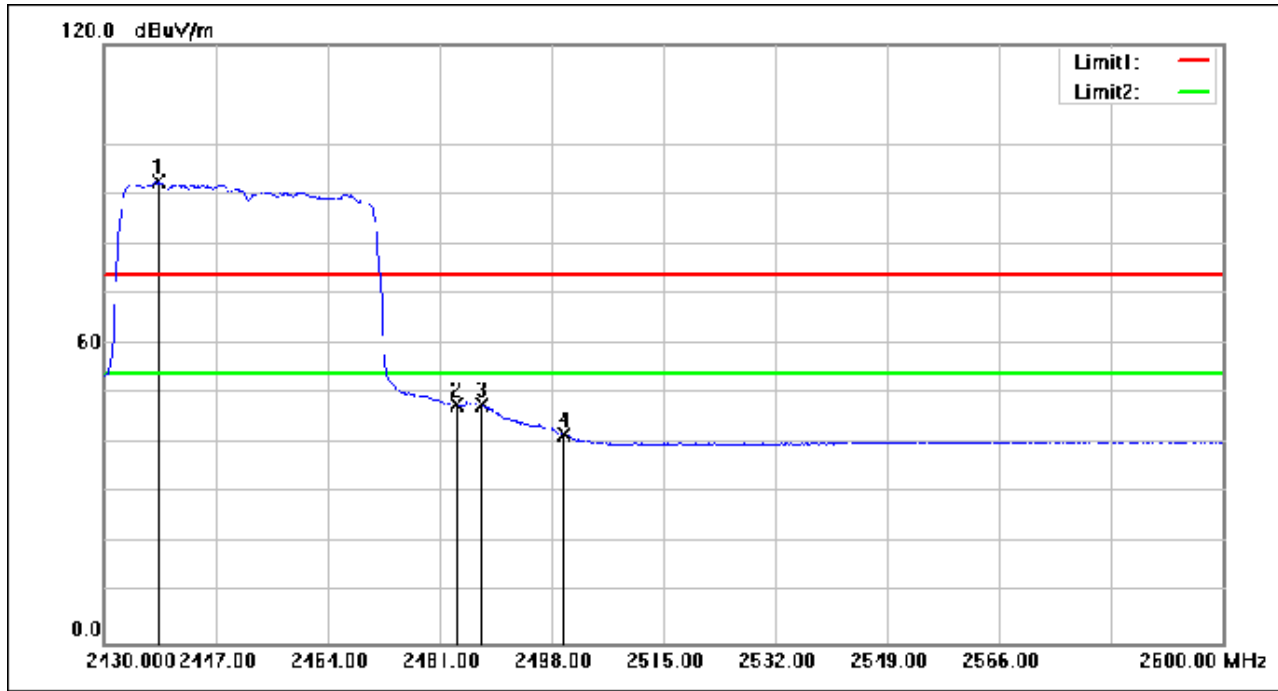

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2438.330	116.91	-24.48	92.43	54.00	38.43	AVG
2	2483.500	72.04	-24.27	47.77	54.00	-6.23	AVG
3	2487.460	72.07	-24.25	47.82	54.00	-6.18	AVG
4	2500.000	66.00	-24.19	41.81	54.00	-12.19	AVG


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 50 of 244

Test Mode: 04; Polarity: Vertical; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: High

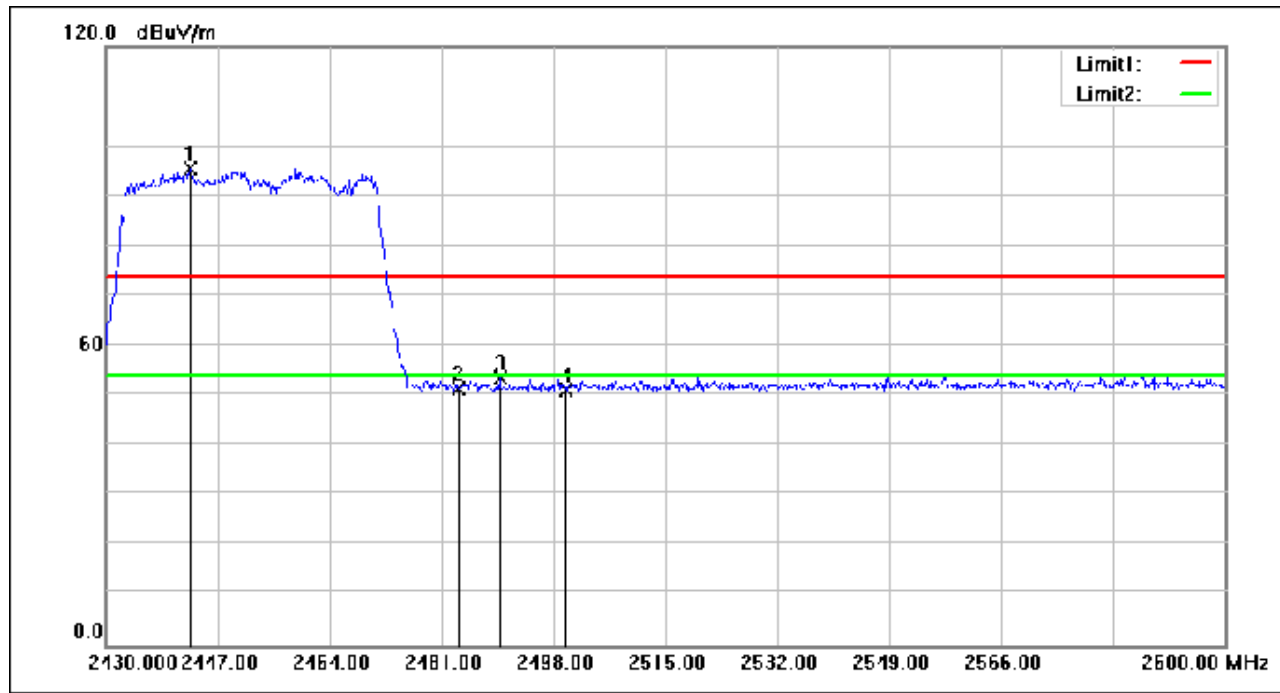

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2442.750	120.00	-24.46	95.54	74.00	21.54	peak
2	2483.500	75.77	-24.27	51.50	74.00	-22.50	peak
3	2489.840	77.92	-24.24	53.68	74.00	-20.32	peak
4	2500.000	75.20	-24.19	51.01	74.00	-22.99	peak

7.3 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Measurement Distance: 3M

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.3.1 E.U.T. Operation


Operating Environment:

Temperature: °C Humidity: % RH Atmospheric Pressure: 1010 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and Only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

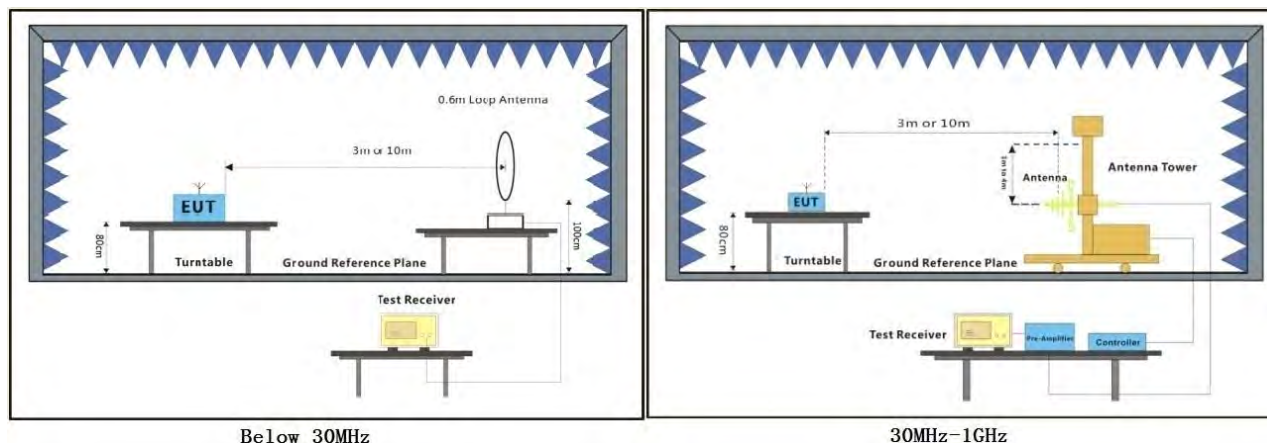

7.3.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamplifier Factor}$
2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 53 of 244

Test Mode: 04; Polarity: Horizontal

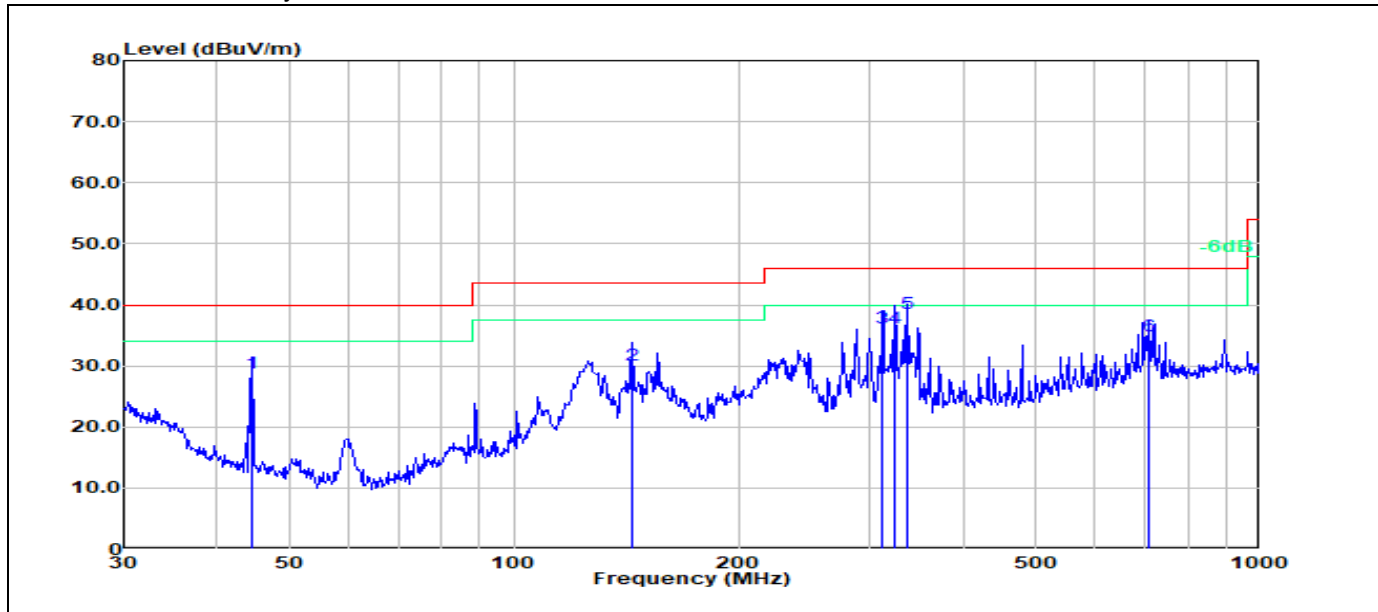

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	44.5868	20.11	8.63	28.74	40.00	-11.26	100	165	QP
2	143.8295	16.57	13.55	30.12	43.50	-13.38	100	105	QP
3	312.1794	20.29	15.92	36.21	46.00	-9.79	100	232	QP
4	324.4561	19.91	16.21	36.12	46.00	-9.88	200	51	QP
5	336.0352	22.40	16.22	38.62	46.00	-7.38	100	51	QP
6	709.1823	10.93	23.93	34.86	46.00	-11.14	100	360	QP


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 54 of 244

Test Mode: 04; Polarity: Vertical

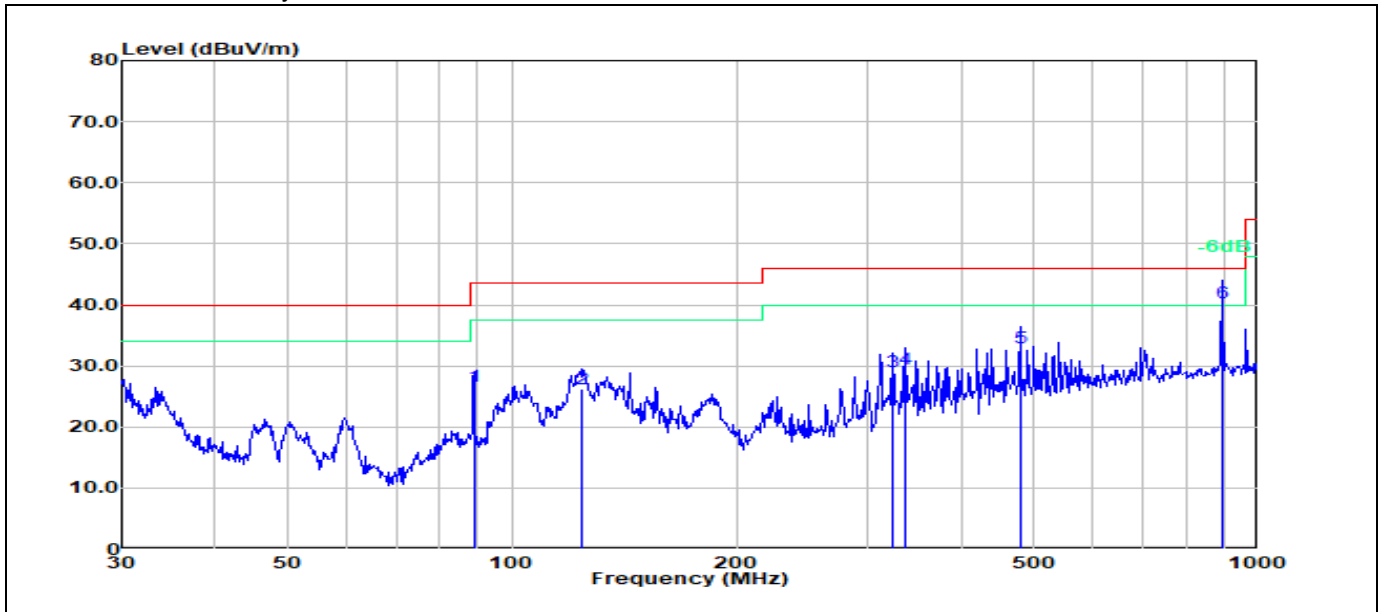

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	88.9639	15.15	11.59	26.74	43.50	-16.76	100	360	QP
2	123.6985	11.97	14.34	26.31	43.50	-17.19	100	242	QP
3	324.4561	12.90	16.21	29.11	46.00	-16.89	100	248	QP
4	336.0352	13.32	16.22	29.54	46.00	-16.46	100	315	QP
5	480.5276	12.87	20.18	33.05	46.00	-12.95	100	308	QP
6	893.8567	14.65	25.67	40.32	46.00	-5.68	200	289	QP

7.4 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.6

Measurement Distance: 3M

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

7.4.1 E.U.T. Operation


Operating Environment:

Temperature: °C Humidity: % RH Atmospheric Pressure: 1010 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

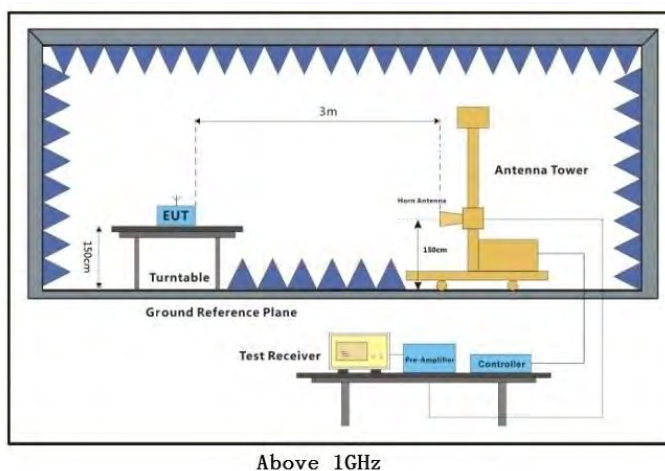

7.4.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamplifier Factor}$
2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 57 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

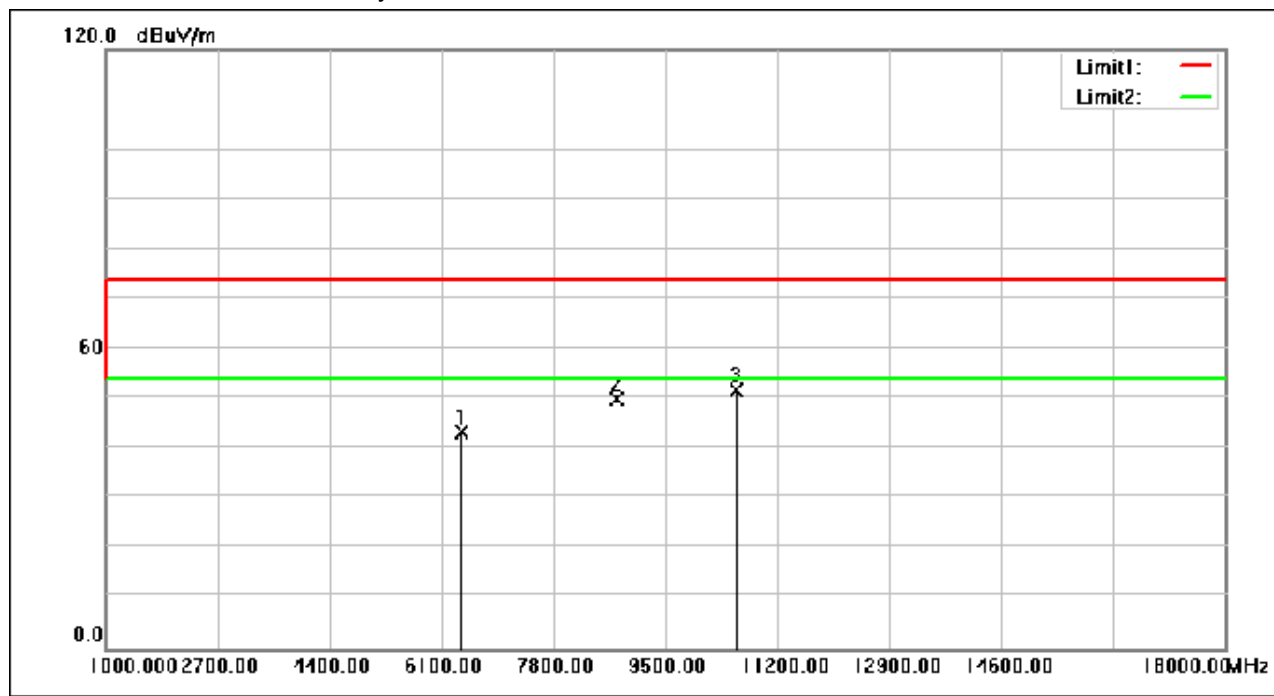

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6409.400	57.12	-13.70	43.42	74.00	-30.58	peak
2	8769.000	59.22	-9.31	49.91	74.00	-24.09	peak
3	10581.880	58.74	-6.99	51.75	74.00	-22.25	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 58 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

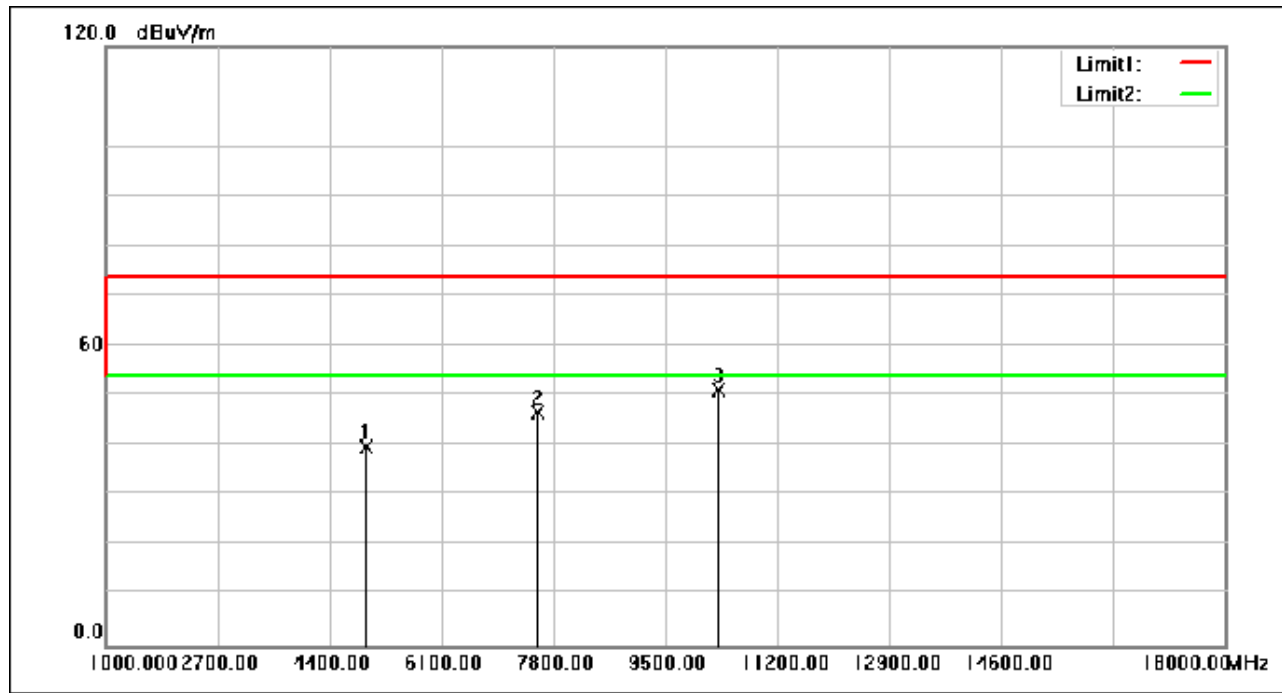

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4969.160	58.23	-18.46	39.77	74.00	-34.23	peak
2	7564.040	57.78	-11.17	46.61	74.00	-27.39	peak
3	10307.160	58.22	-7.15	51.07	74.00	-22.93	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 59 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

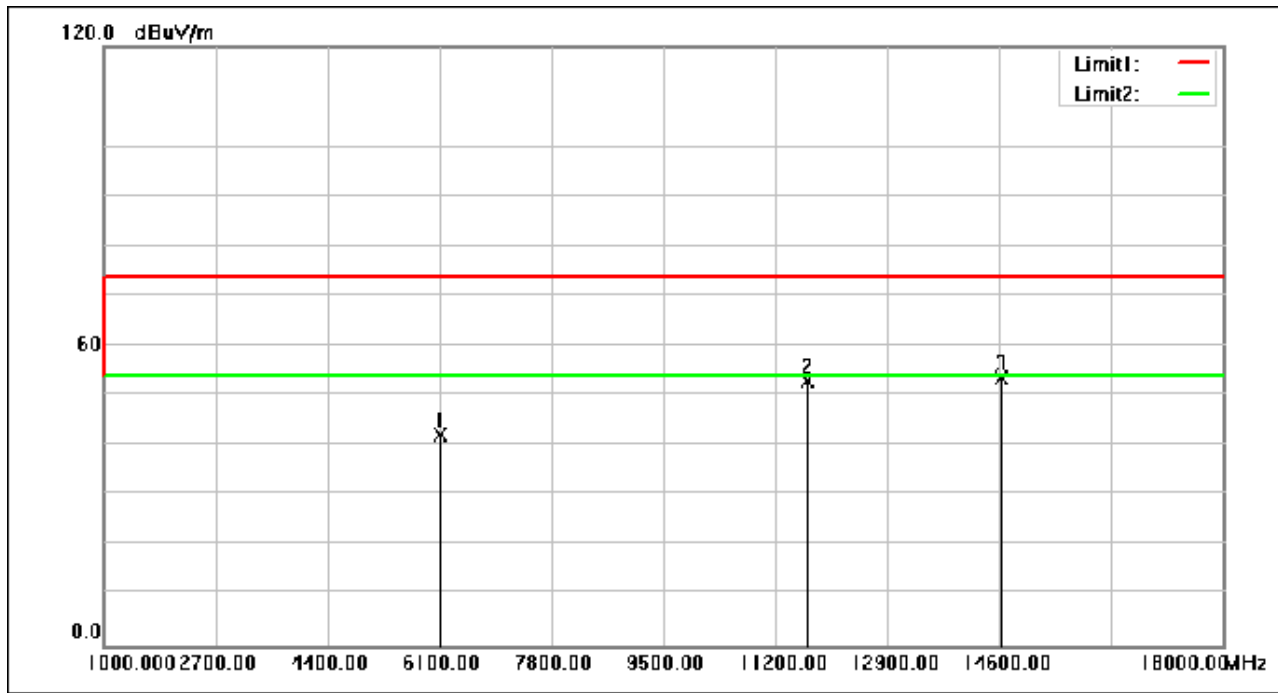

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6124.480	57.46	-15.18	42.28	74.00	-31.72	peak
2	11707.960	59.24	-6.19	53.05	74.00	-20.95	peak
3	14639.440	59.22	-5.71	53.51	74.00	-20.49	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 60 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

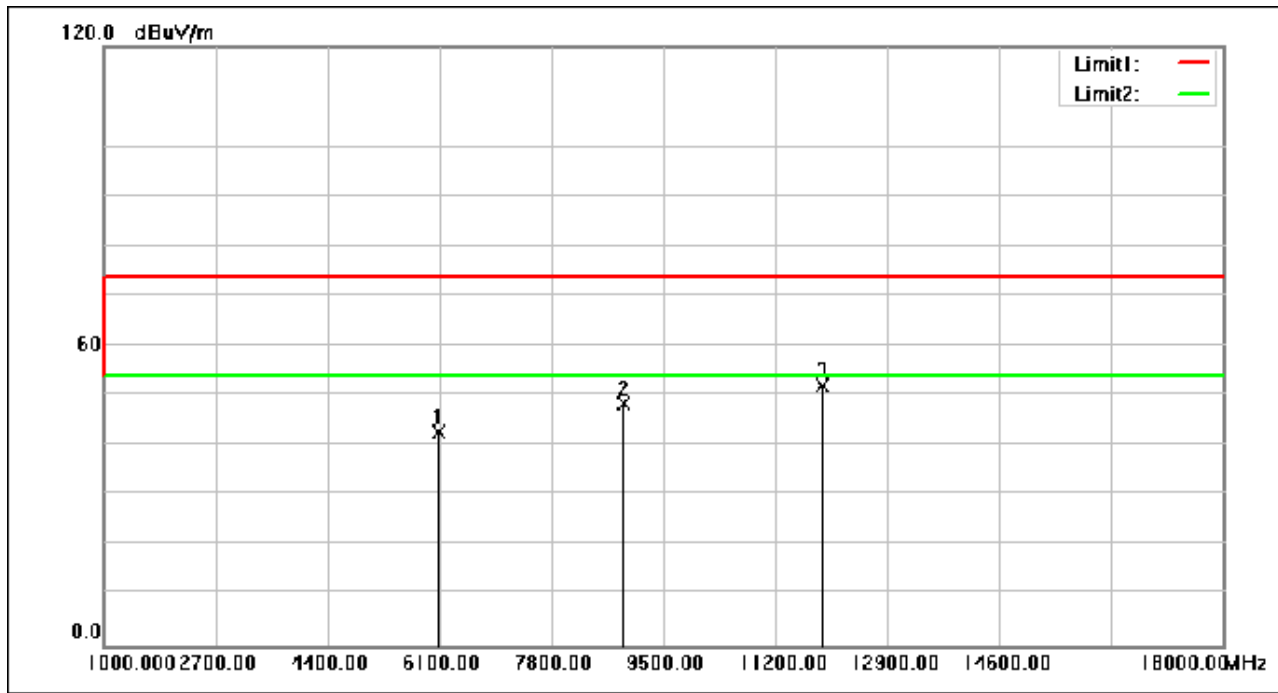

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6085.720	58.23	-15.38	42.85	74.00	-31.15	peak
2	8896.160	57.59	-9.10	48.49	74.00	-25.51	peak
3	11918.080	58.19	-6.02	52.17	74.00	-21.83	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 61 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High

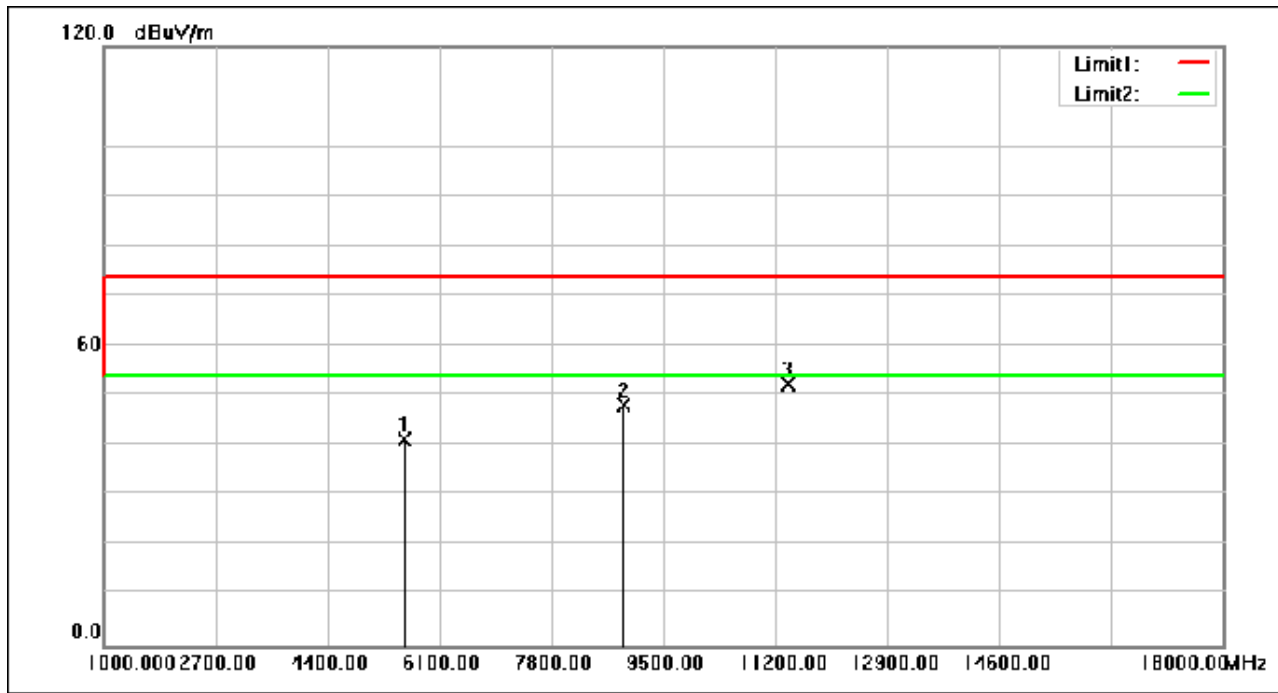

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5583.880	58.73	-17.51	41.22	74.00	-32.78	peak
2	8898.880	57.35	-9.09	48.26	74.00	-25.74	peak
3	11399.920	58.82	-6.44	52.38	74.00	-21.62	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 62 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High

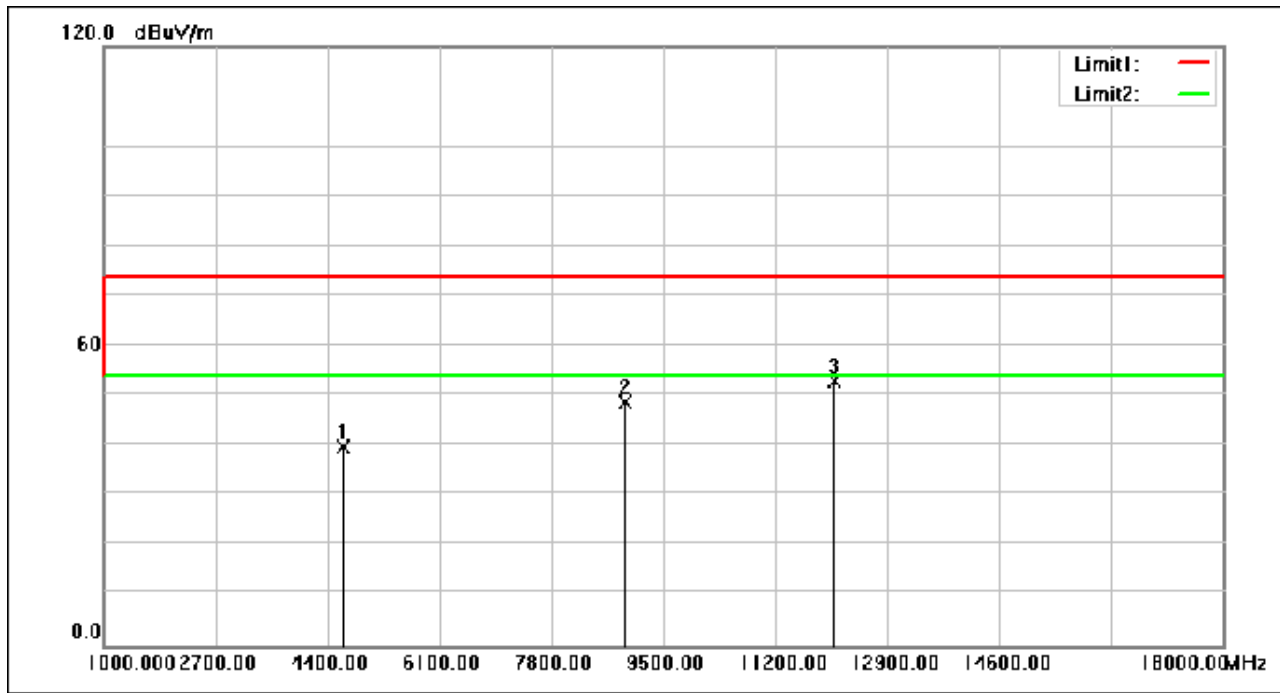

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4643.440	58.30	-18.66	39.64	74.00	-34.36	peak
2	8926.080	57.74	-9.05	48.69	74.00	-25.31	peak
3	12091.480	58.85	-5.93	52.92	74.00	-21.08	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 63 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

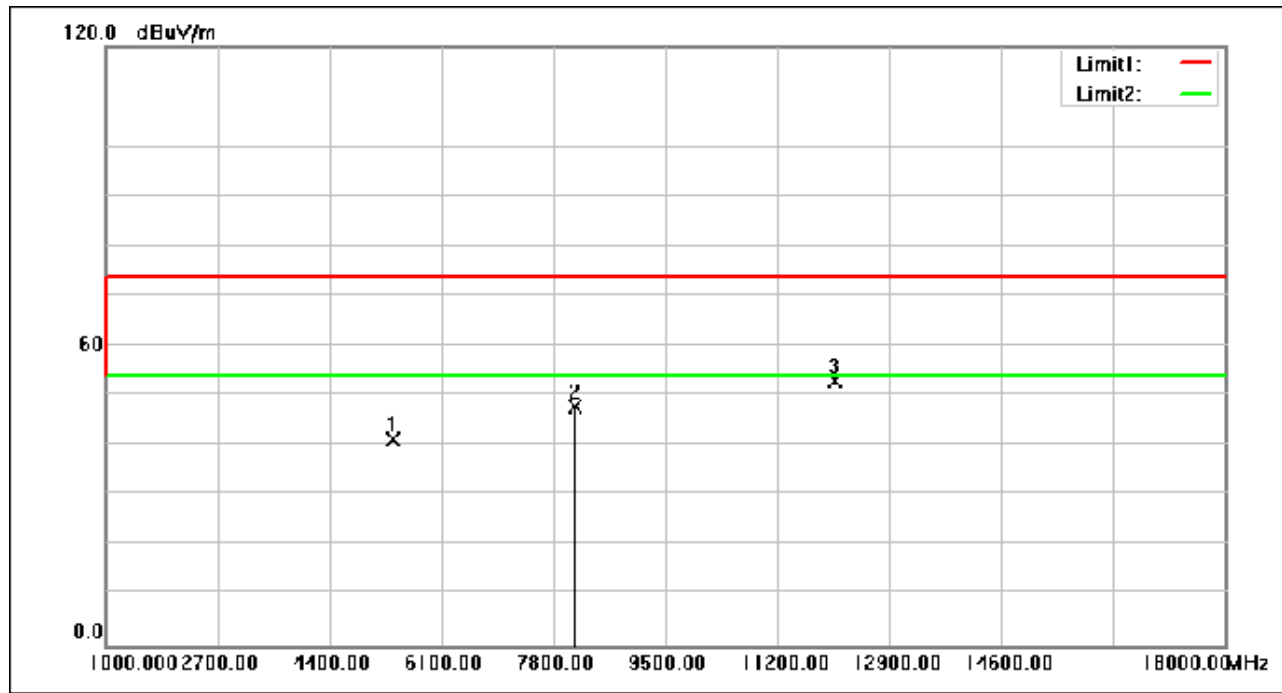

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5364.240	59.11	-17.90	41.21	74.00	-32.79	peak
2	8138.640	58.09	-10.35	47.74	74.00	-26.26	peak
3	12069.040	58.77	-5.92	52.85	74.00	-21.15	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 64 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

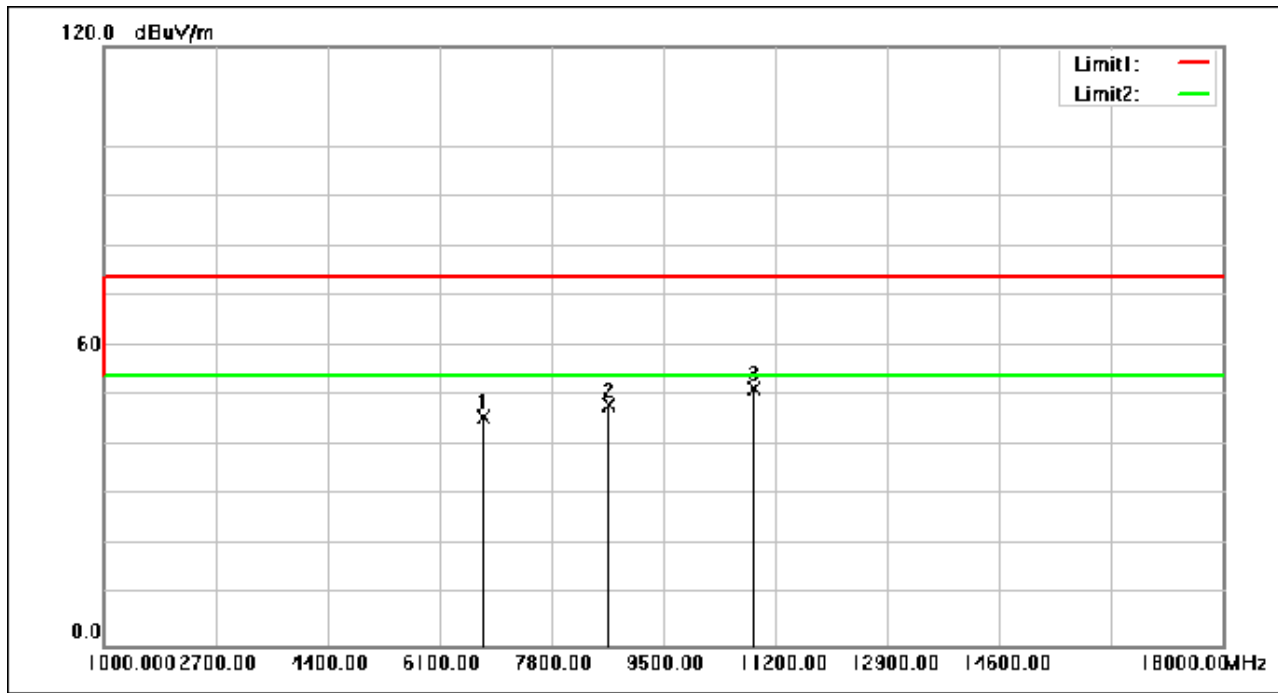

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6769.800	57.70	-11.96	45.74	74.00	-28.26	peak
2	8680.600	57.64	-9.46	48.18	74.00	-25.82	peak
3	10861.360	58.29	-6.84	51.45	74.00	-22.55	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 65 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:middle

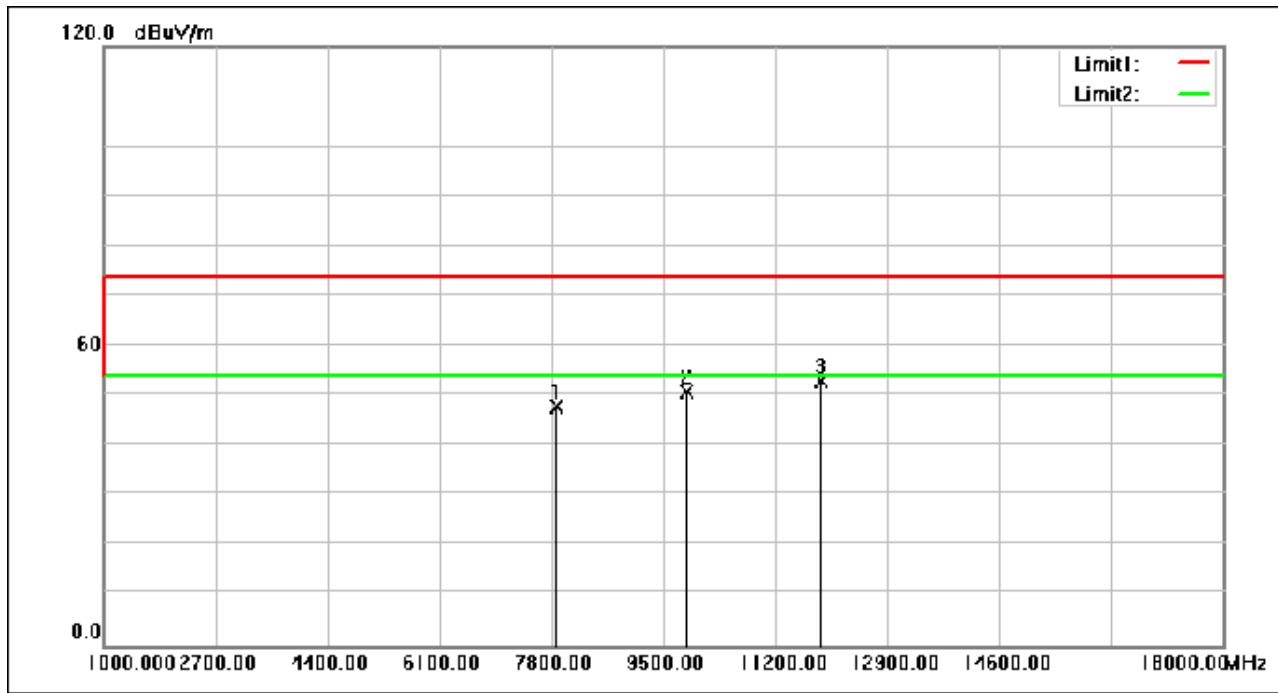

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7879.560	58.70	-10.76	47.94	74.00	-26.06	peak
2	9853.600	58.02	-7.30	50.72	74.00	-23.28	peak
3	11906.520	59.00	-6.03	52.97	74.00	-21.03	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 66 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:middle

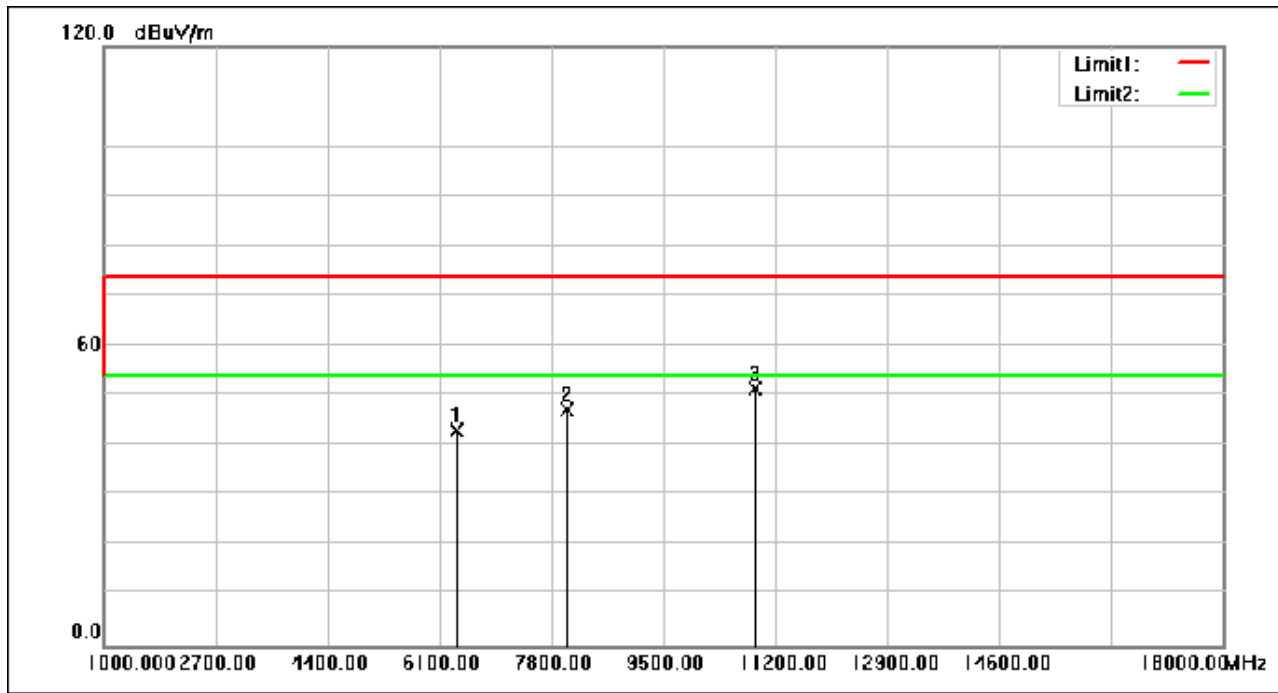

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6368.600	57.07	-13.91	43.16	74.00	-30.84	peak
2	8043.440	57.93	-10.53	47.40	74.00	-26.60	peak
3	10910.320	58.31	-6.80	51.51	74.00	-22.49	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 67 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:High

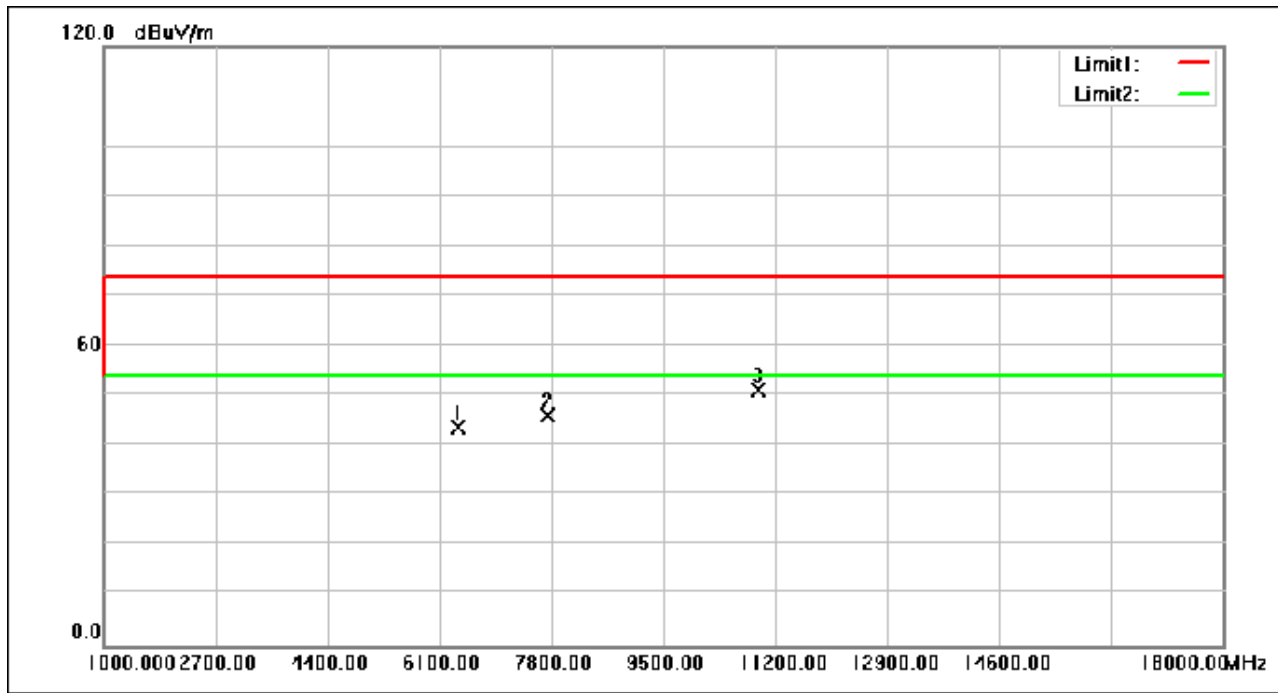

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6405.320	57.37	-13.71	43.66	74.00	-30.34	peak
2	7748.320	57.01	-10.93	46.08	74.00	-27.92	peak
3	10959.960	57.90	-6.78	51.12	74.00	-22.88	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 68 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:High

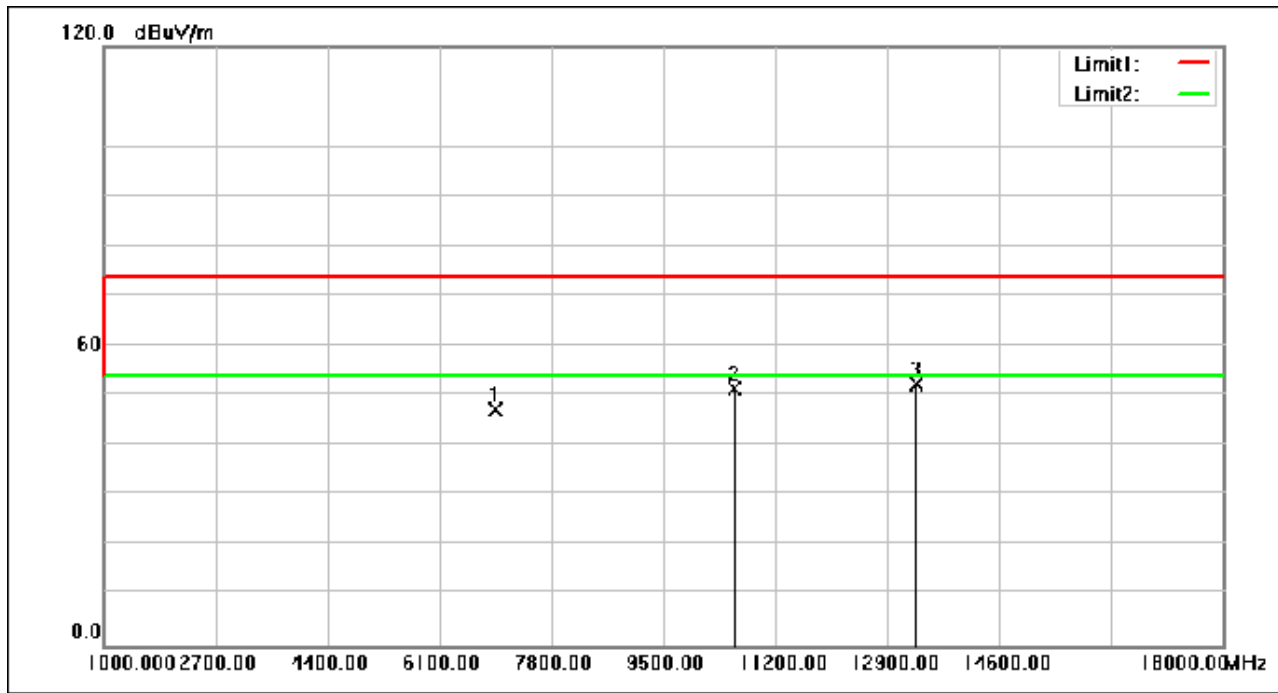

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6952.720	59.01	-11.65	47.36	74.00	-26.64	peak
2	10573.720	58.37	-7.00	51.37	74.00	-22.63	peak
3	13356.280	58.63	-6.31	52.32	74.00	-21.68	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 69 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

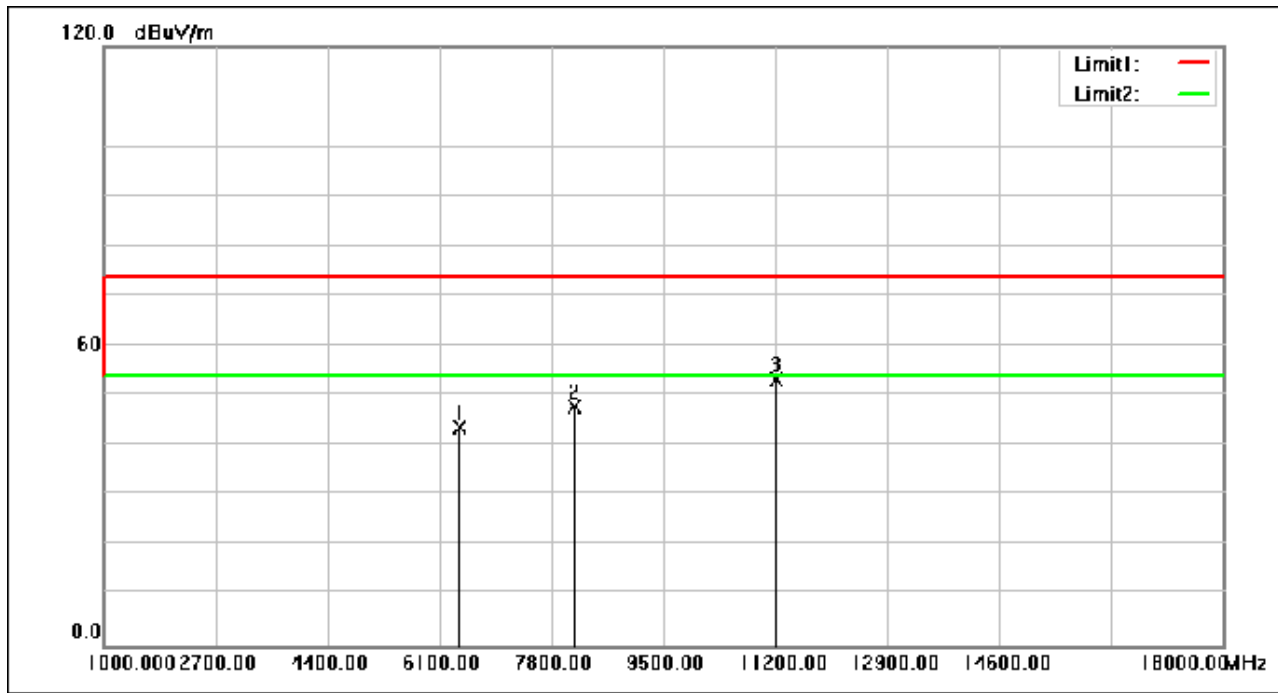

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6416.200	57.21	-13.66	43.55	74.00	-30.45	peak
2	8154.280	58.18	-10.32	47.86	74.00	-26.14	peak
3	11221.760	59.91	-6.58	53.33	74.00	-20.67	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 70 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

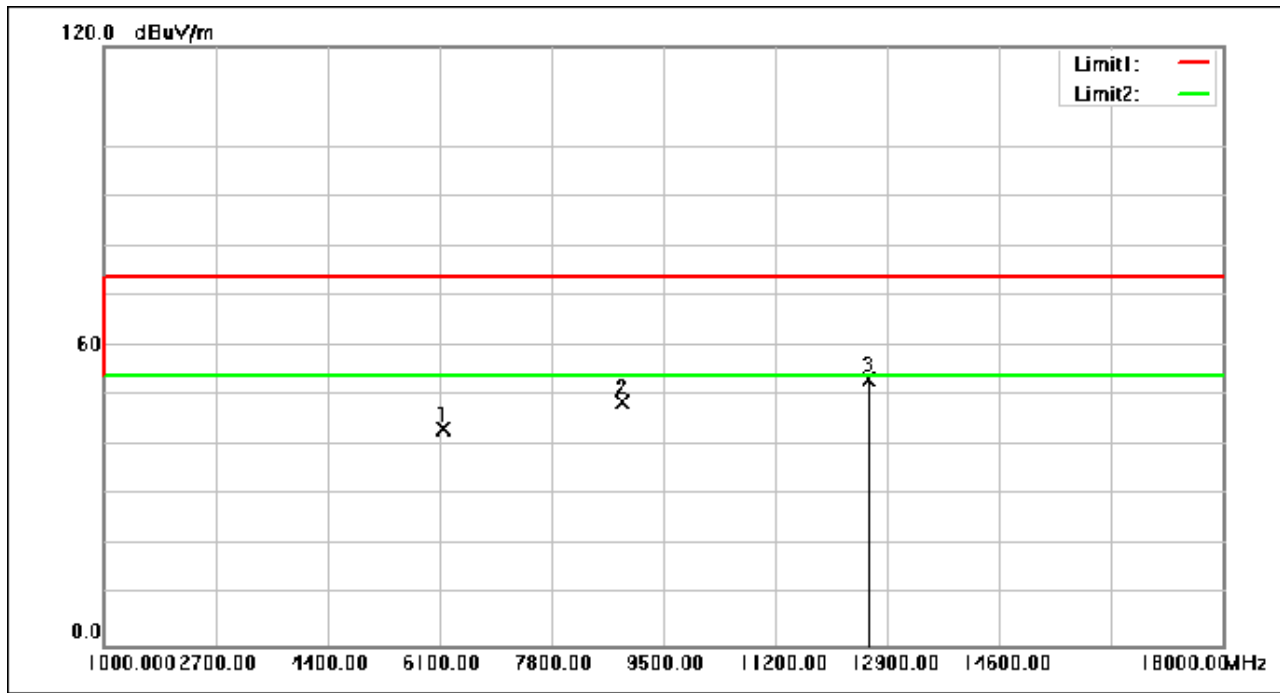

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6158.480	58.43	-15.01	43.42	74.00	-30.58	peak
2	8871.000	58.03	-9.14	48.89	74.00	-25.11	peak
3	12625.960	59.35	-6.17	53.18	74.00	-20.82	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 71 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

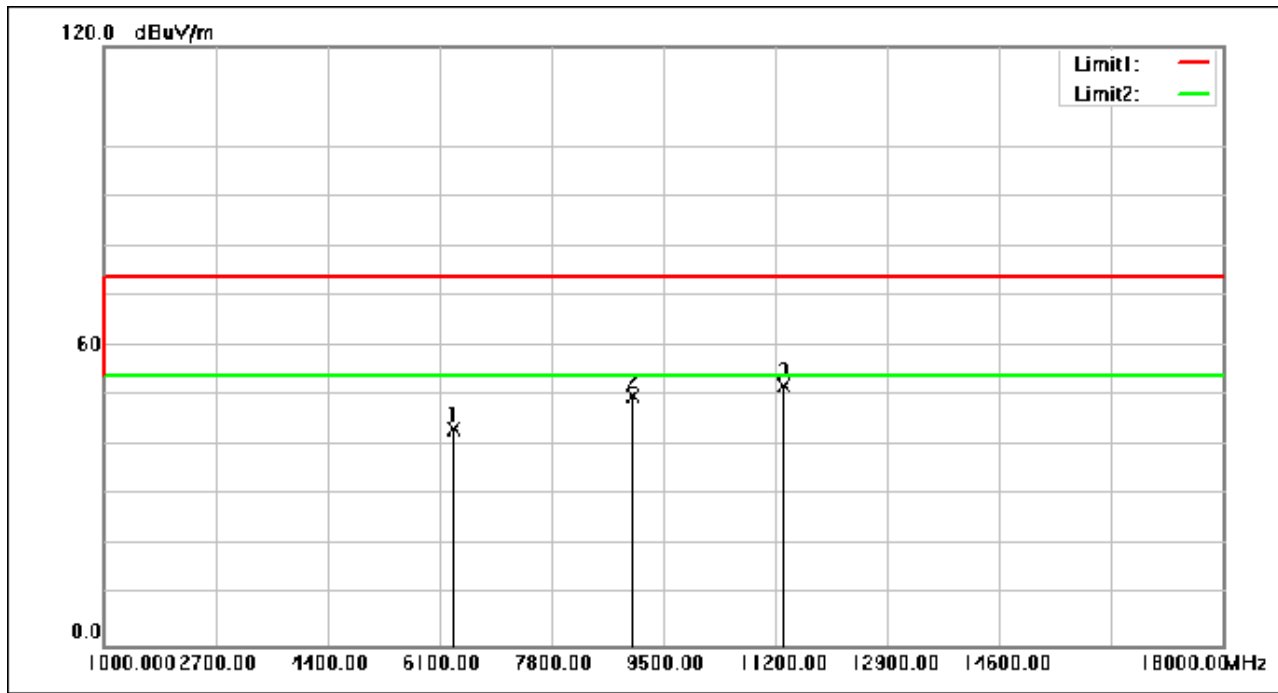

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6329.840	57.45	-14.12	43.33	74.00	-30.67	peak
2	9049.160	58.90	-8.80	50.10	74.00	-23.90	peak
3	11320.360	58.60	-6.50	52.10	74.00	-21.90	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 72 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

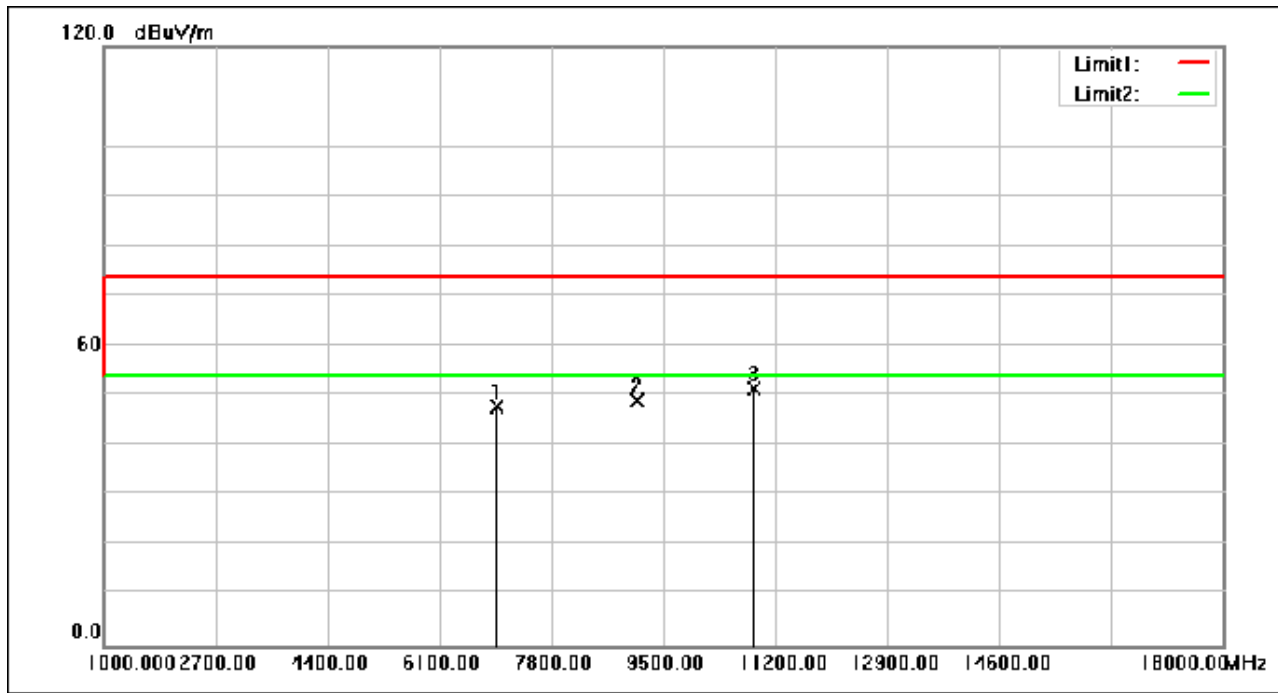

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6968.360	59.61	-11.62	47.99	74.00	-26.01	peak
2	9120.560	57.84	-8.67	49.17	74.00	-24.83	peak
3	10883.800	58.19	-6.82	51.37	74.00	-22.63	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 73 of 244

Test Mode: 04; Polarity: Horizontal; Modulation: 802.11n; Bandwidth: 20MHz; Channel: High

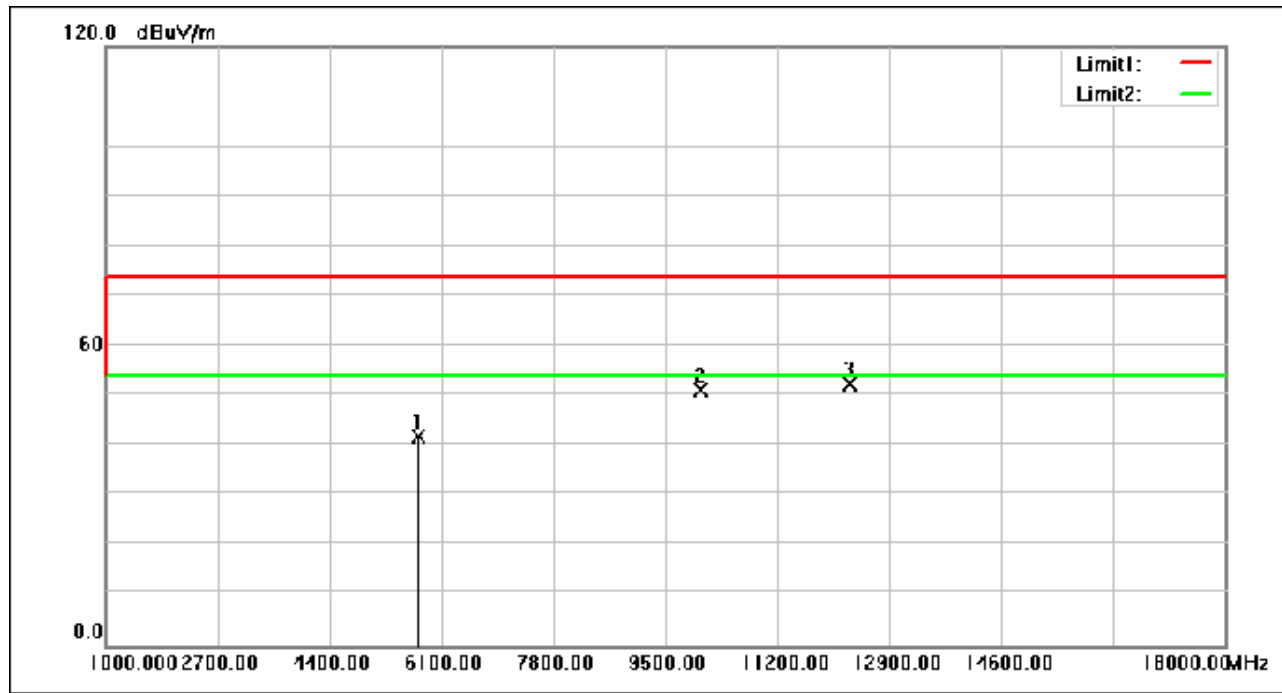

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5747.080	58.76	-16.83	41.93	74.00	-32.07	peak
2	10036.520	58.32	-7.30	51.02	74.00	-22.98	peak
3	12320.640	58.51	-6.03	52.48	74.00	-21.52	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 74 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

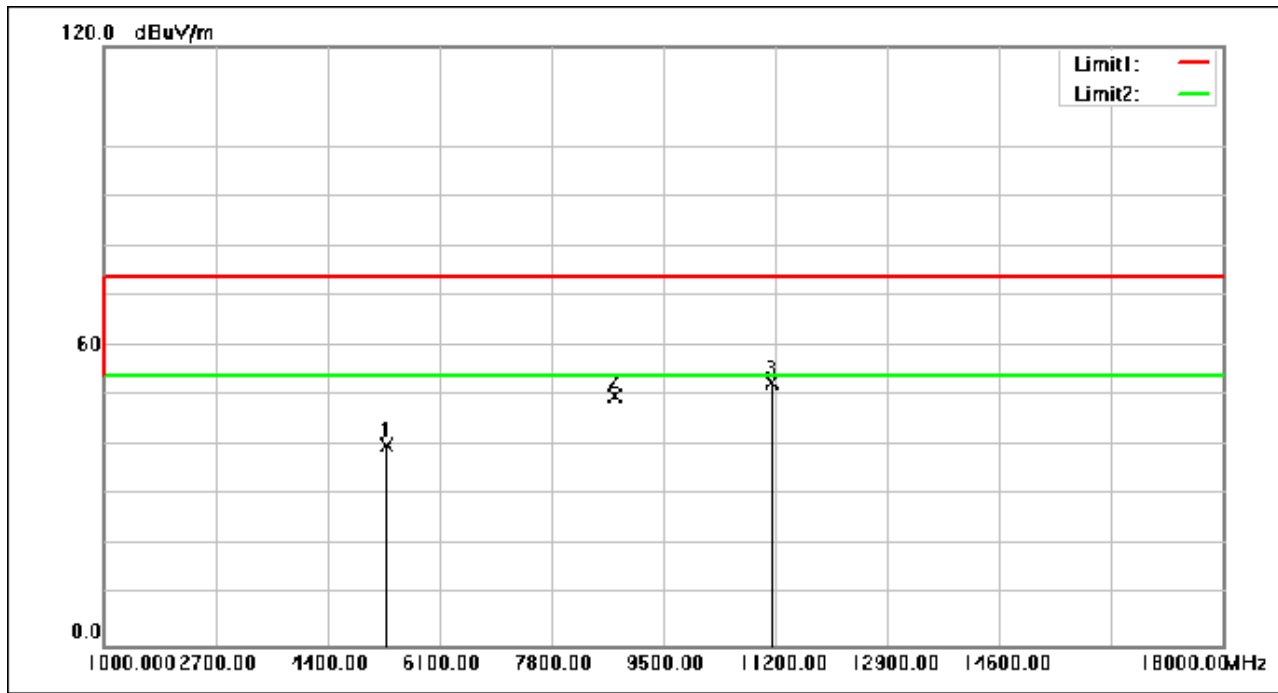

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5313.240	58.09	-17.97	40.12	74.00	-33.88	peak
2	8782.600	59.28	-9.29	49.99	74.00	-24.01	peak
3	11147.640	59.32	-6.64	52.68	74.00	-21.32	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 75 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

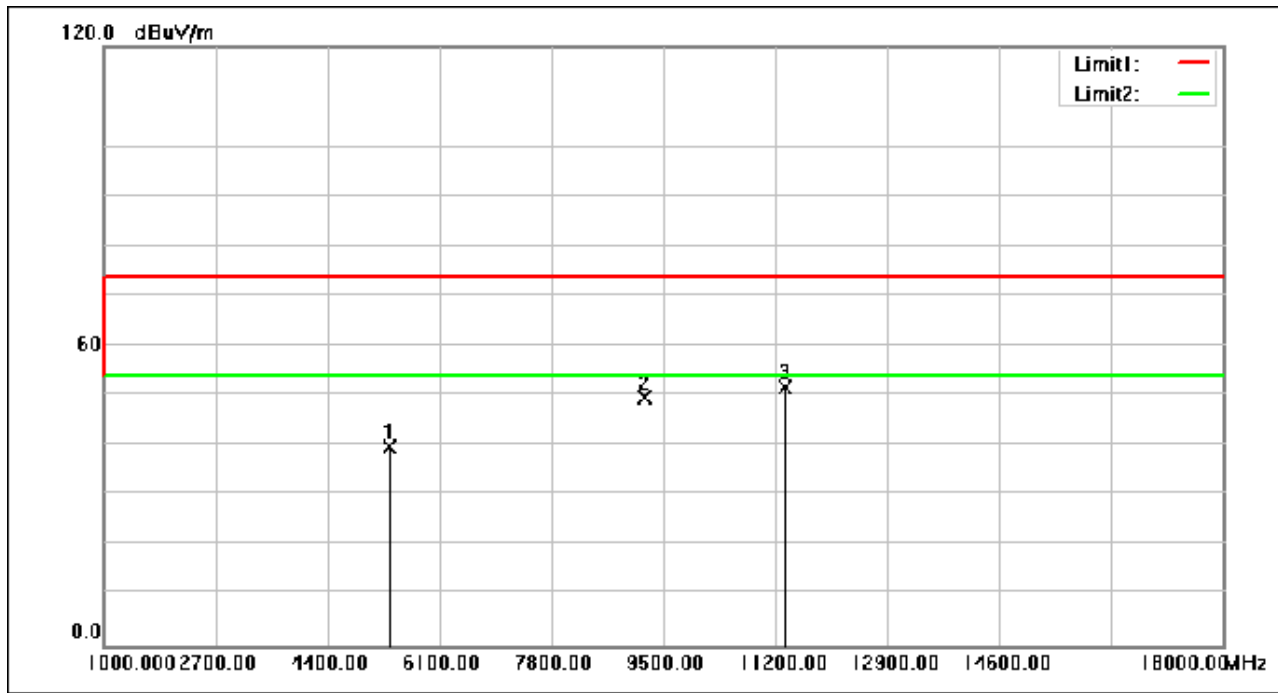

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5336.360	57.67	-17.94	39.73	74.00	-34.27	peak
2	9221.880	58.25	-8.48	49.77	74.00	-24.23	peak
3	11356.400	58.19	-6.47	51.72	74.00	-22.28	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 76 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

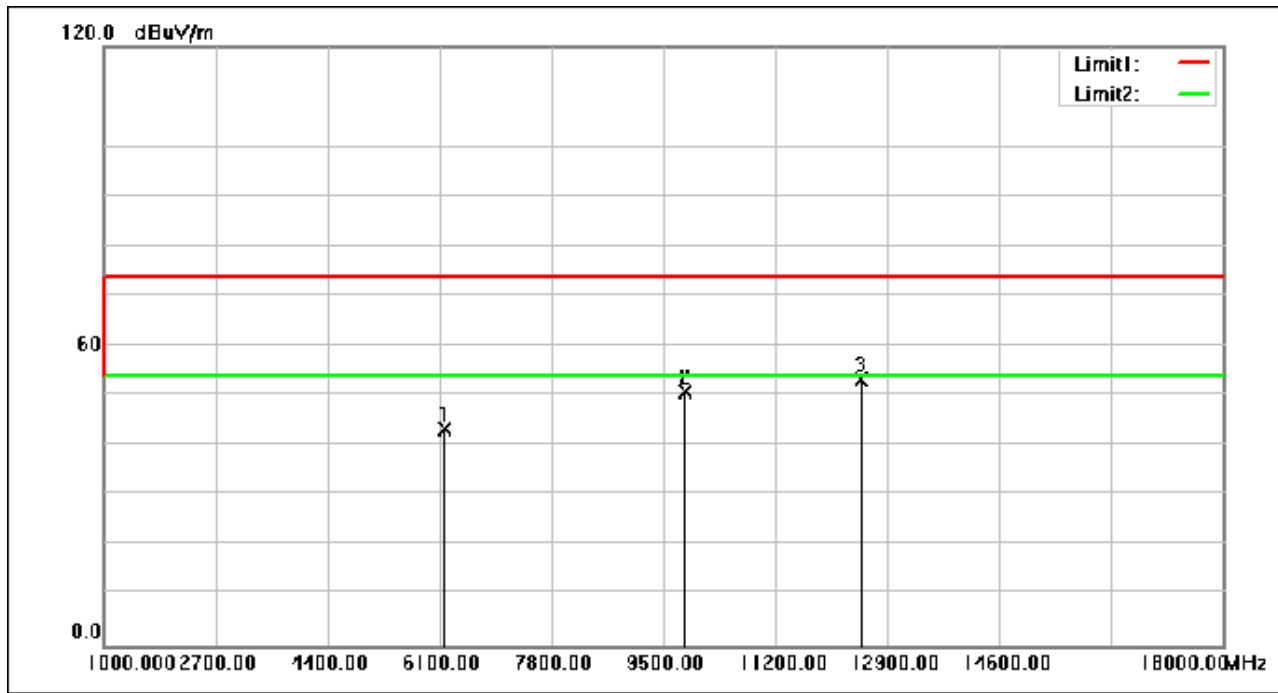

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6182.280	58.36	-14.88	43.48	74.00	-30.52	peak
2	9838.640	58.28	-7.31	50.97	74.00	-23.03	peak
3	12498.120	59.45	-6.12	53.33	74.00	-20.67	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 77 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

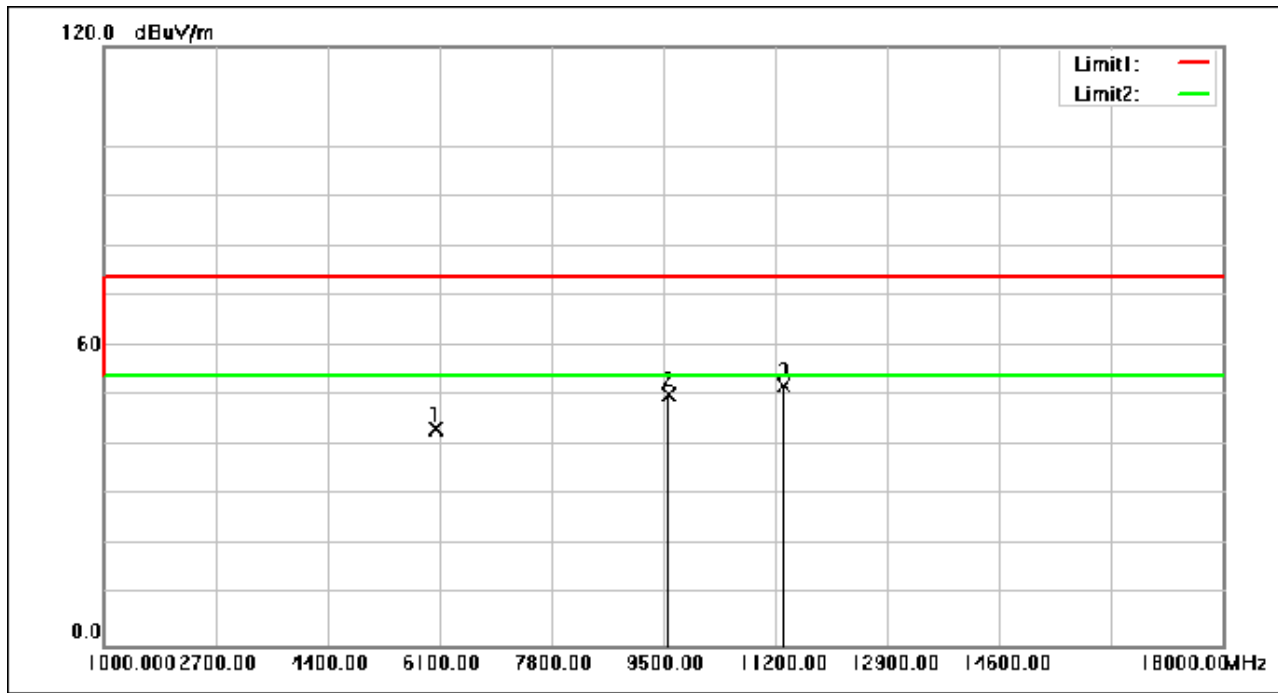

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6043.560	58.90	-15.57	43.33	74.00	-30.67	peak
2	9597.920	58.14	-7.77	50.37	74.00	-23.63	peak
3	11321.720	58.51	-6.50	52.01	74.00	-21.99	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 78 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

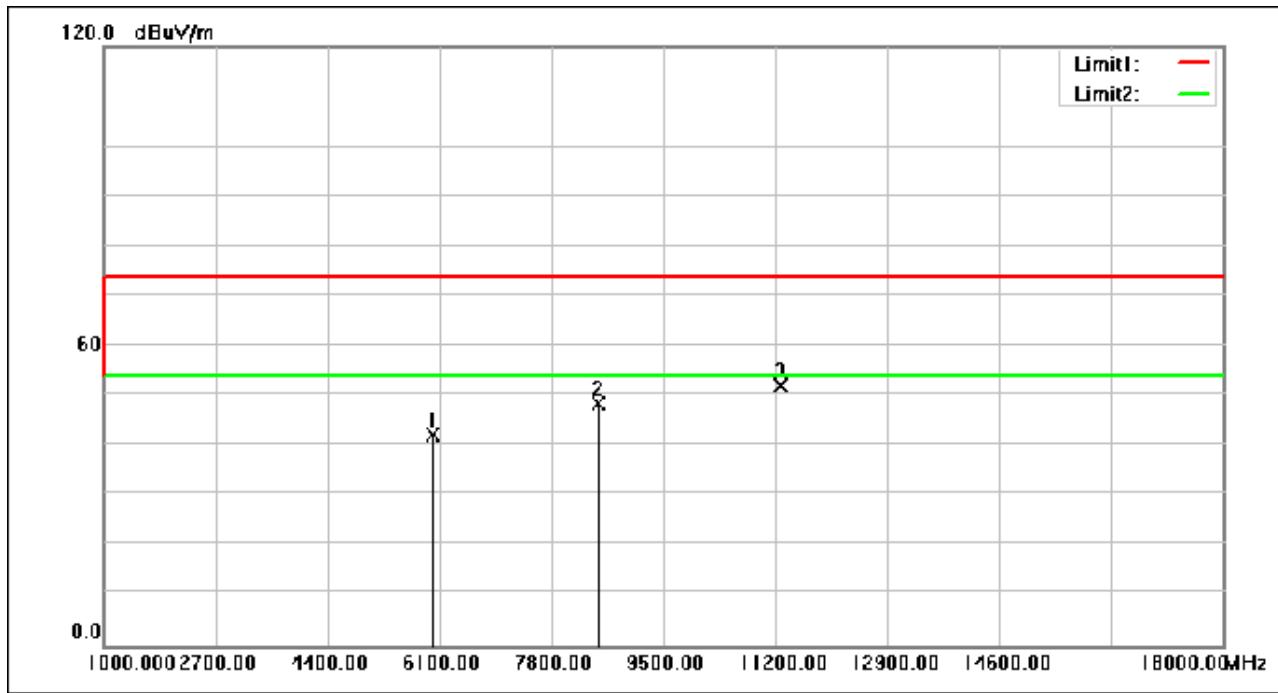

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6005.480	57.77	-15.75	42.02	74.00	-31.98	peak
2	8526.240	58.10	-9.71	48.39	74.00	-25.61	peak
3	11274.120	58.73	-6.55	52.18	74.00	-21.82	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 79 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

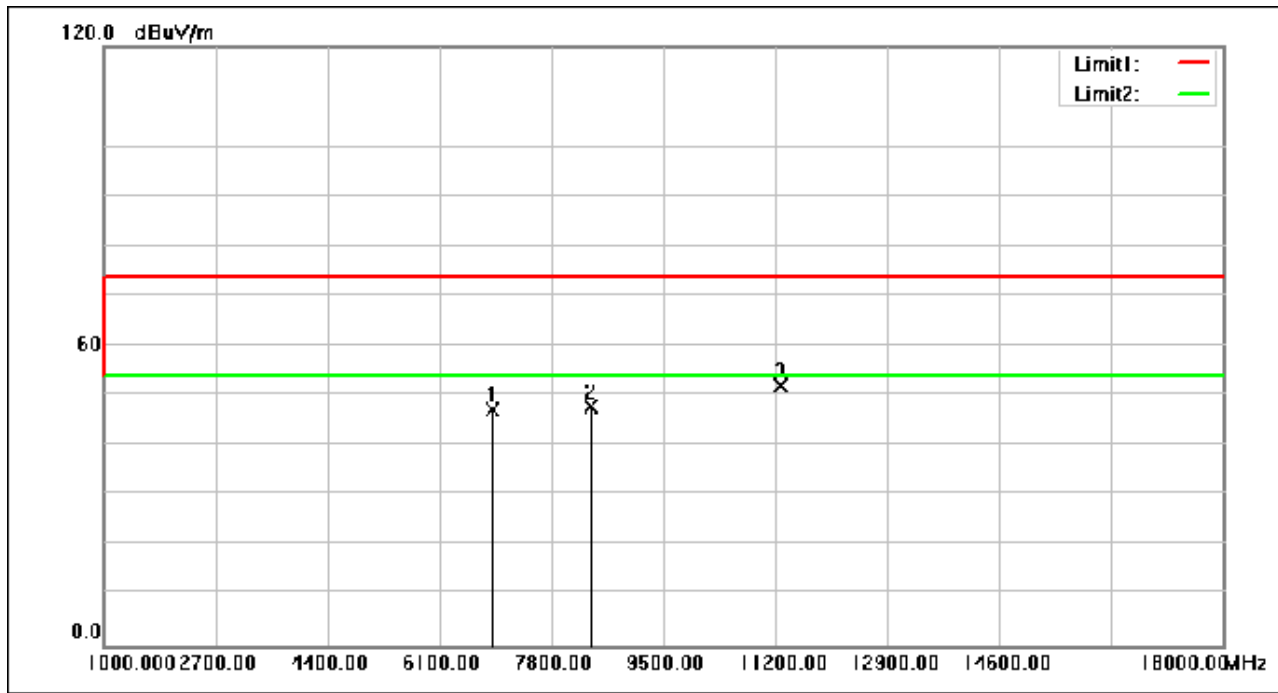

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6901.720	59.05	-11.74	47.31	74.00	-26.69	peak
2	8403.160	57.89	-9.91	47.98	74.00	-26.02	peak
3	11288.400	58.45	-6.53	51.92	74.00	-22.08	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 80 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

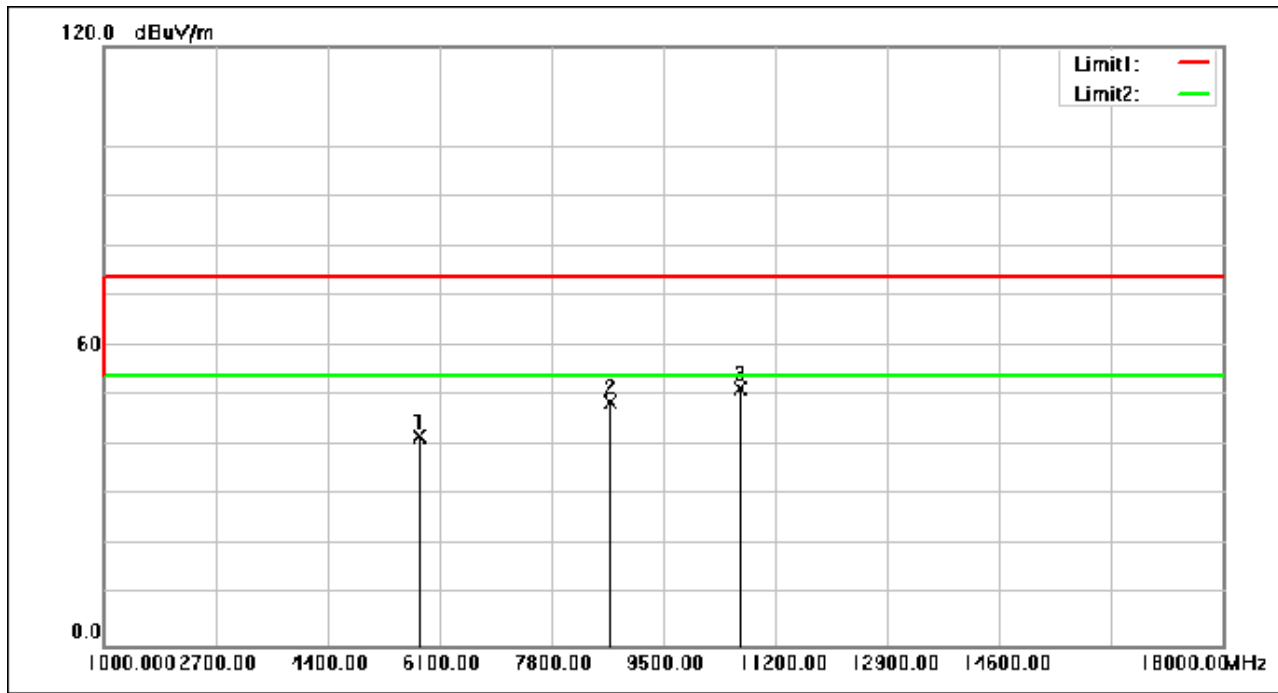

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5808.280	58.45	-16.58	41.87	74.00	-32.13	peak
2	8711.880	58.16	-9.41	48.75	74.00	-25.25	peak
3	10678.440	58.51	-6.94	51.57	74.00	-22.43	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 81 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

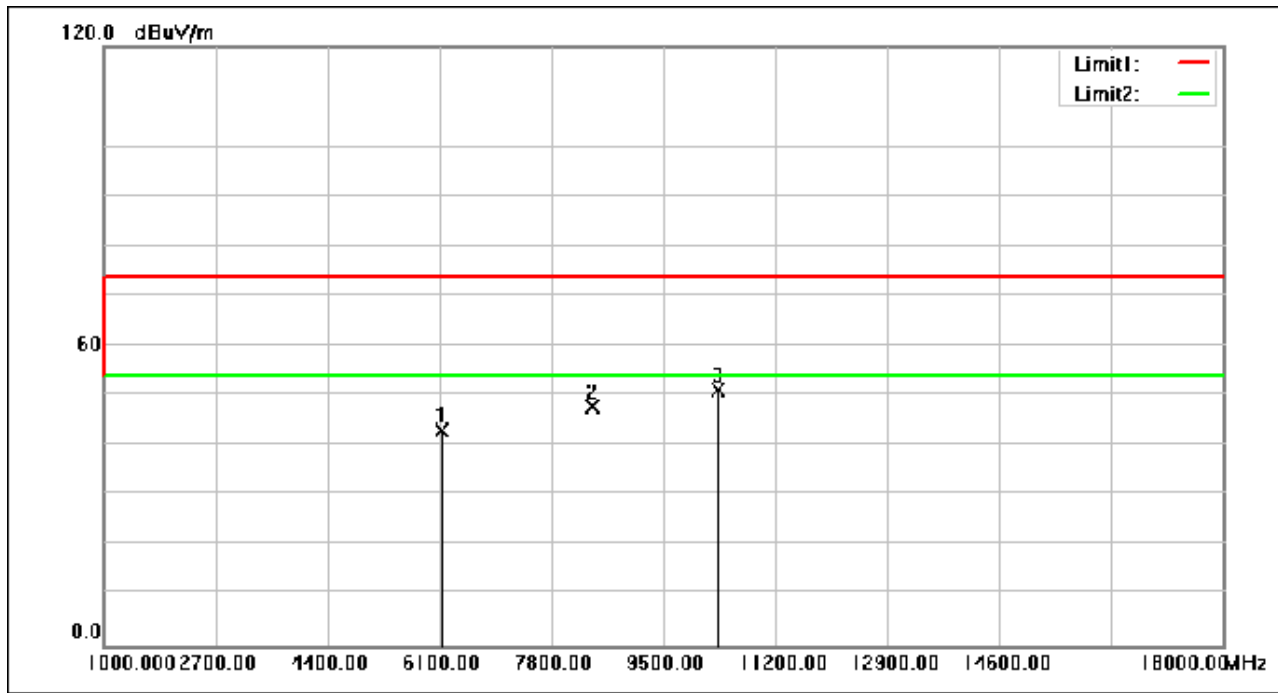

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6144.880	58.18	-15.08	43.10	74.00	-30.90	peak
2	8413.360	57.73	-9.90	47.83	74.00	-26.17	peak
3	10346.600	58.43	-7.13	51.30	74.00	-22.70	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 82 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

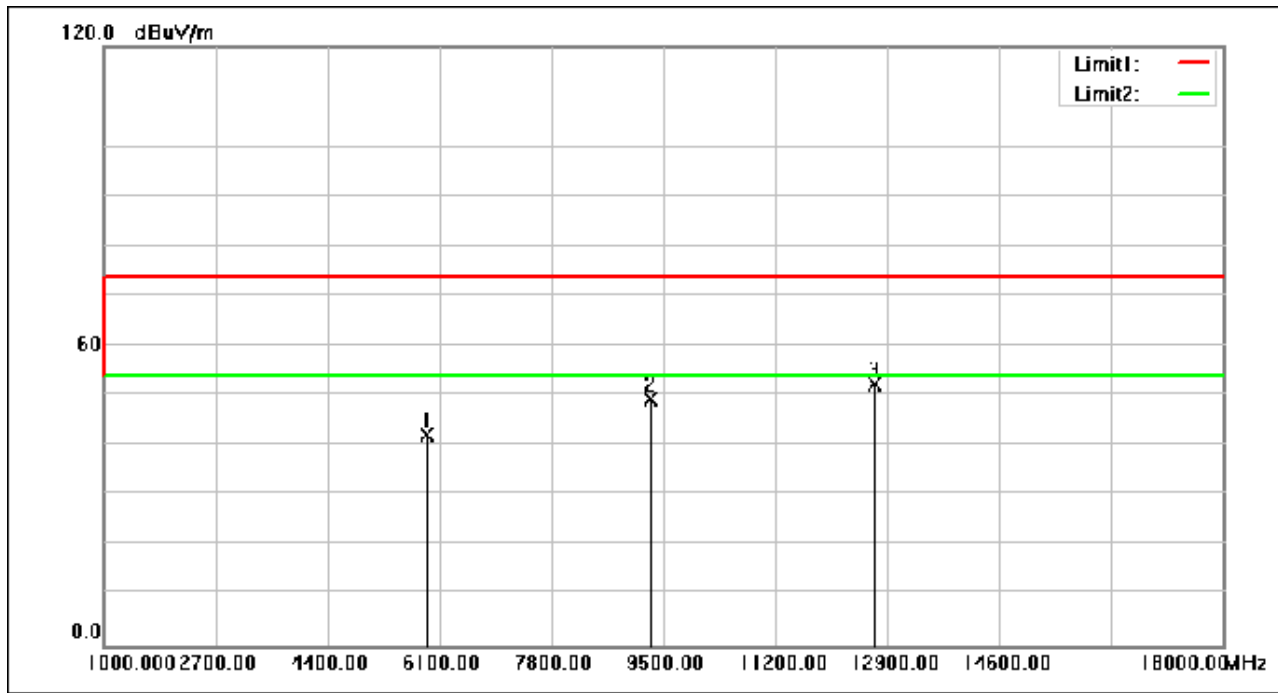

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5905.520	58.21	-16.17	42.04	74.00	-31.96	peak
2	9299.400	57.74	-8.33	49.41	74.00	-24.59	peak
3	12713.000	58.69	-6.21	52.48	74.00	-21.52	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 83 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

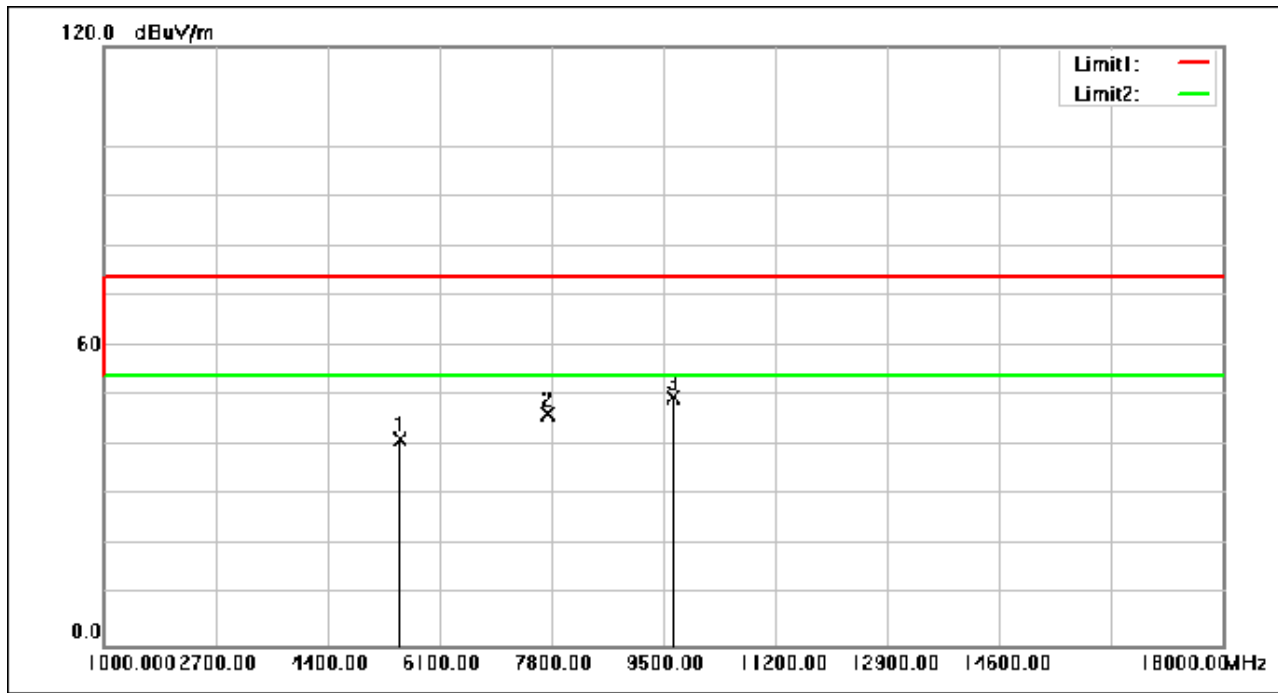

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5518.600	58.84	-17.67	41.17	74.00	-32.83	peak
2	7732.680	57.38	-10.96	46.42	74.00	-27.58	peak
3	9655.040	57.22	-7.67	49.55	74.00	-24.45	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 84 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

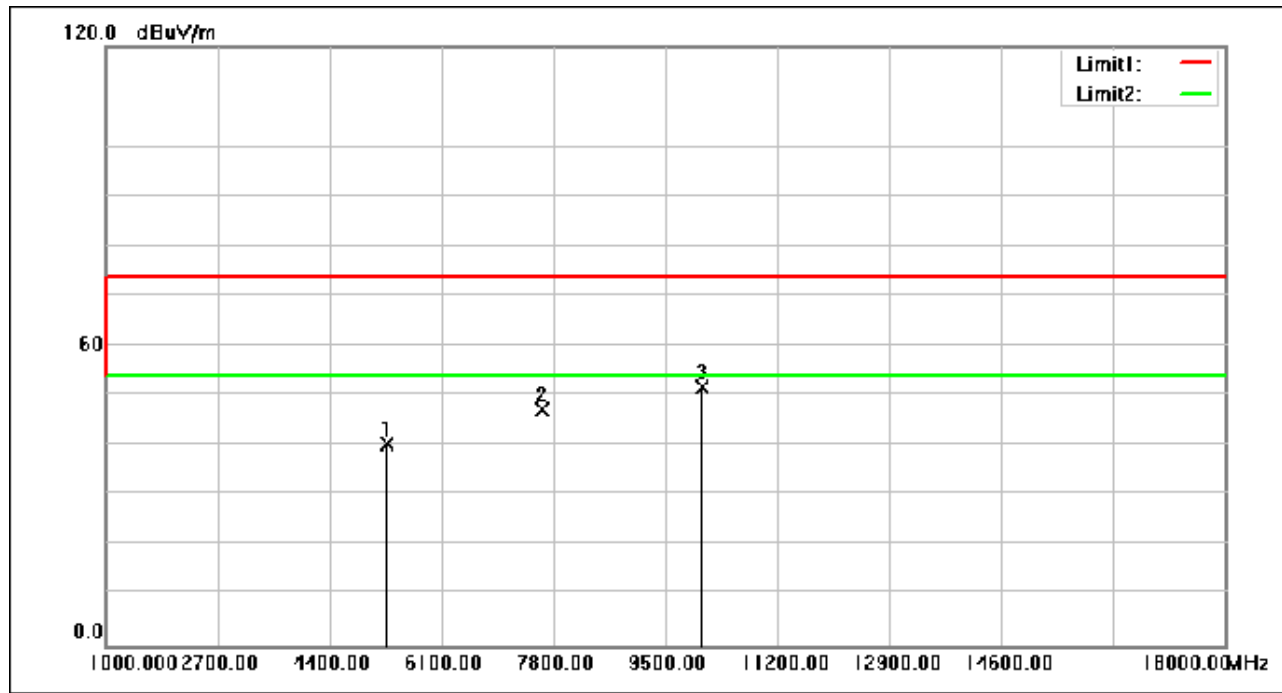

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5282.640	58.34	-18.02	40.32	74.00	-33.68	peak
2	7644.960	58.33	-11.07	47.26	74.00	-26.74	peak
3	10068.480	59.09	-7.29	51.80	74.00	-22.20	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 85 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

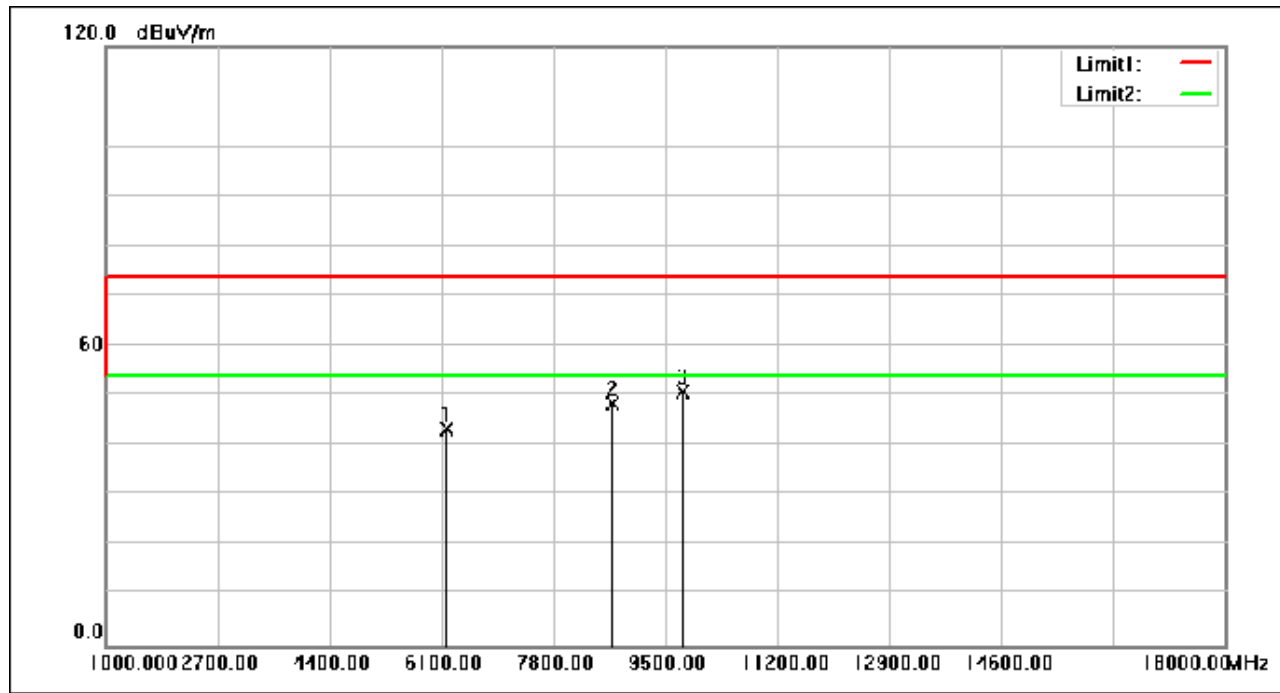

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6176.840	58.16	-14.92	43.24	74.00	-30.76	peak
2	8685.360	57.88	-9.44	48.44	74.00	-25.56	peak
3	9768.600	58.38	-7.45	50.93	74.00	-23.07	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 86 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

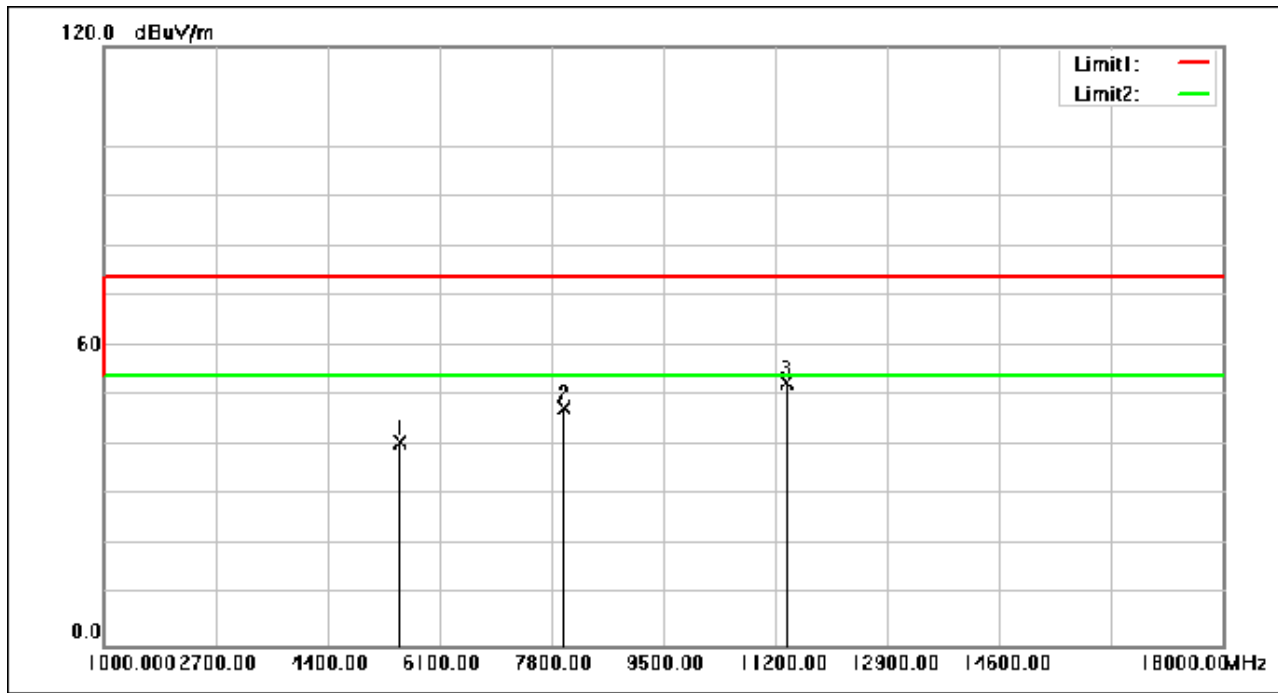

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5517.920	58.27	-17.67	40.60	74.00	-33.40	peak
2	7991.080	58.10	-10.62	47.48	74.00	-26.52	peak
3	11384.280	59.09	-6.46	52.63	74.00	-21.37	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 87 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

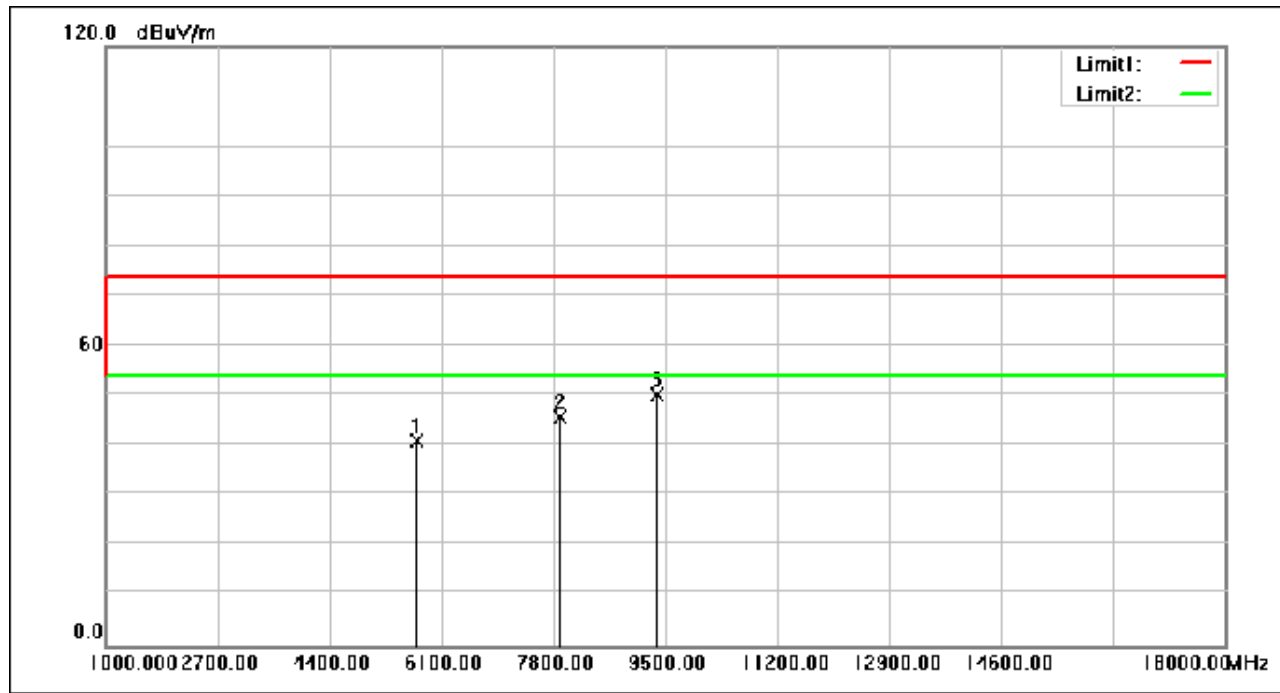

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5729.400	57.87	-16.91	40.96	74.00	-33.04	peak
2	7916.280	56.58	-10.71	45.87	74.00	-28.13	peak
3	9365.360	58.49	-8.21	50.28	74.00	-23.72	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 88 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

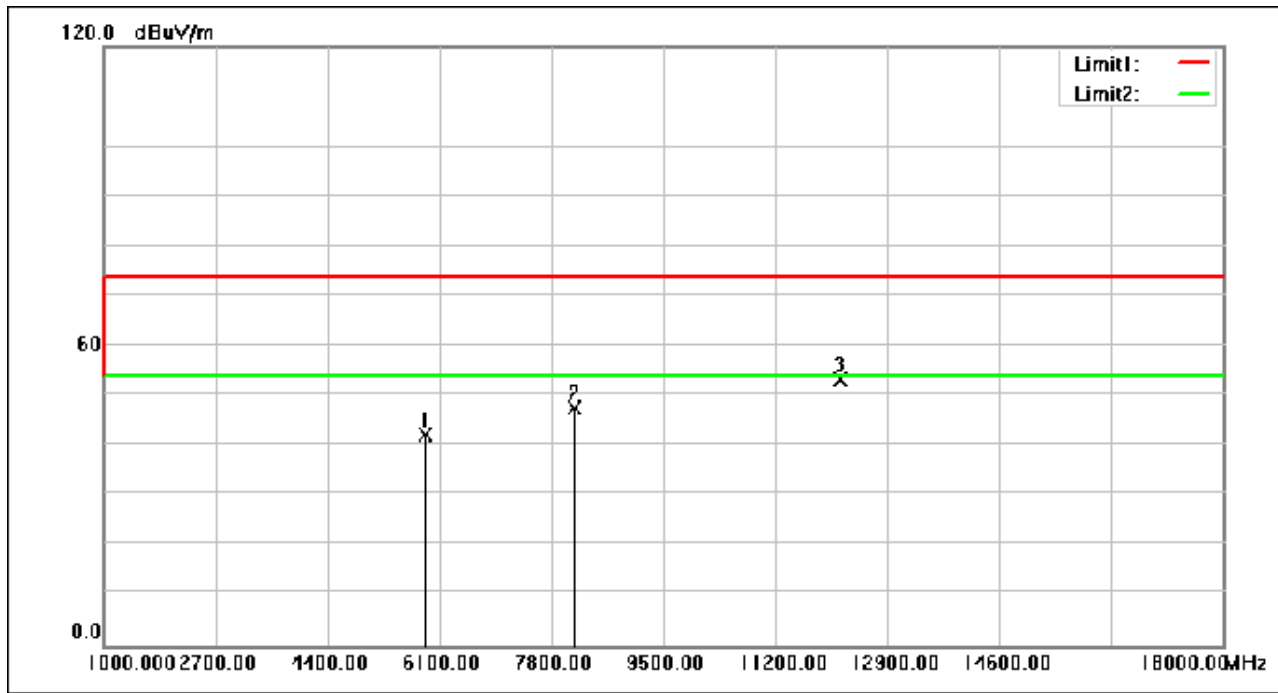

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5889.880	58.37	-16.24	42.13	74.00	-31.87	peak
2	8142.720	57.92	-10.35	47.57	74.00	-26.43	peak
3	12198.920	59.16	-5.98	53.18	74.00	-20.82	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 89 of 244

Test Mode: 04; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 40MHz; Channel: middle

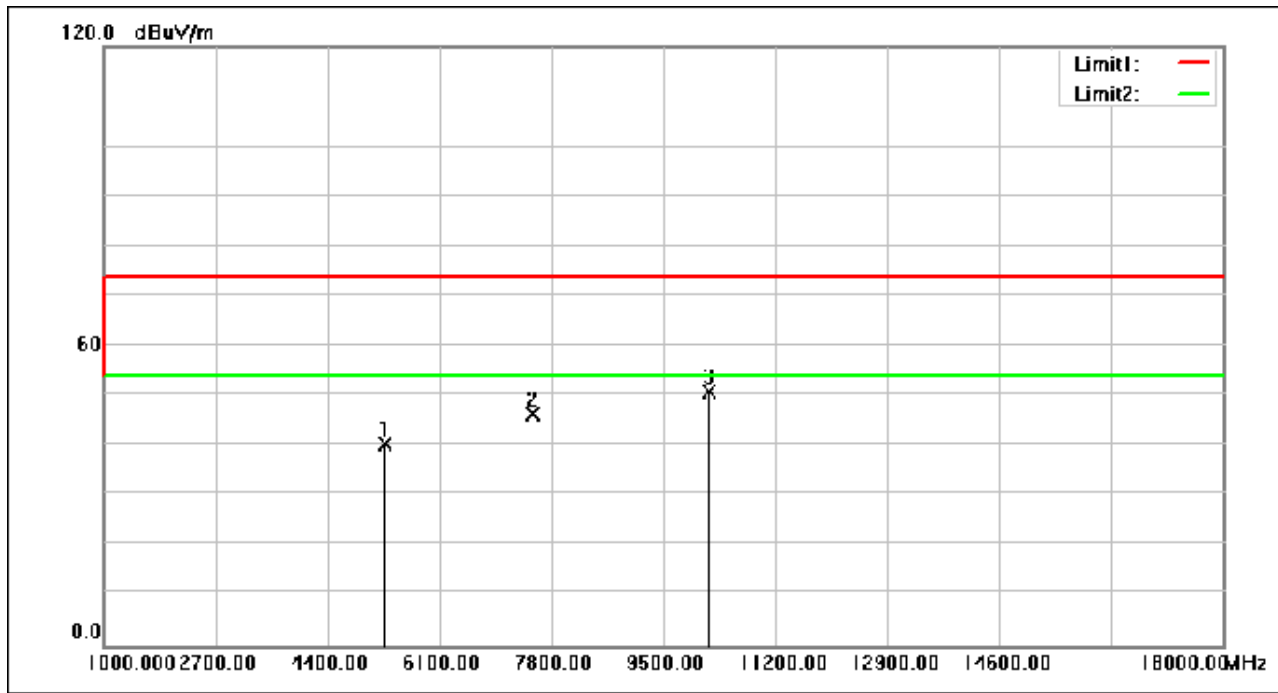

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5274.480	58.44	-18.03	40.41	74.00	-33.59	peak
2	7519.160	57.60	-11.23	46.37	74.00	-27.63	peak
3	10181.360	57.97	-7.22	50.75	74.00	-23.25	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 90 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:middle

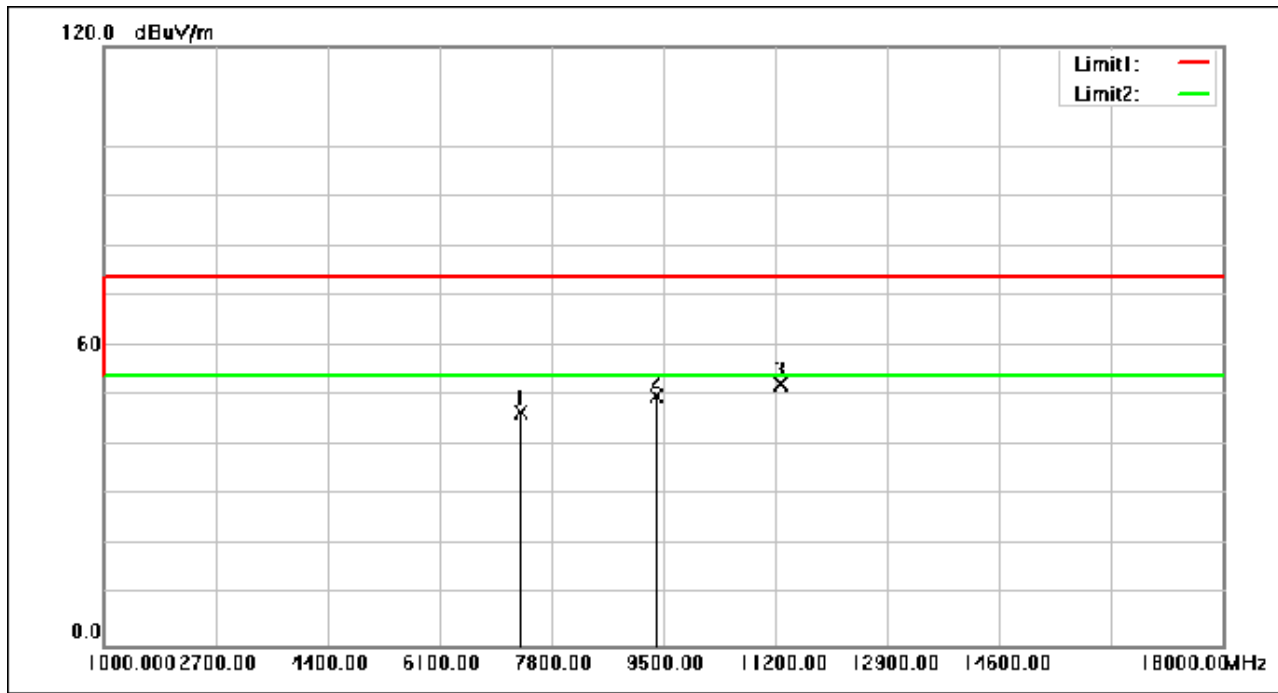

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7342.360	58.00	-11.42	46.58	74.00	-27.42	peak
2	9400.720	58.10	-8.14	49.96	74.00	-24.04	peak
3	11294.520	58.93	-6.53	52.40	74.00	-21.60	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 91 of 244

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

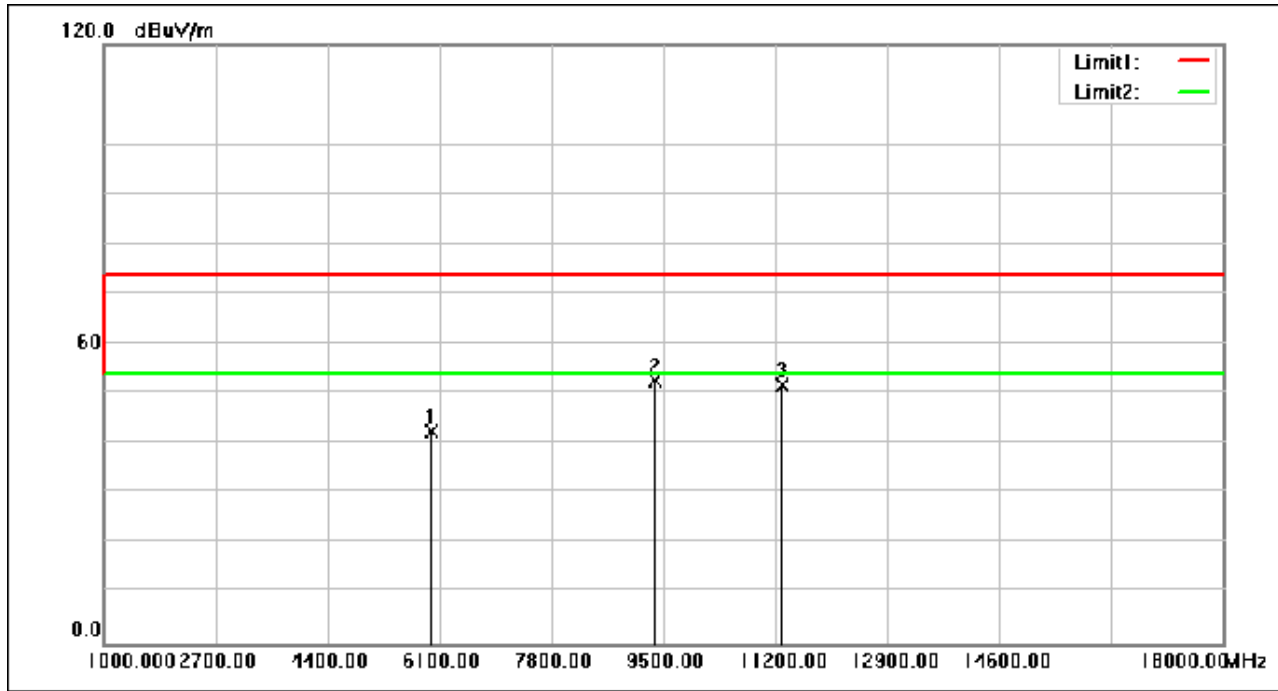

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5989.840	58.37	-15.83	42.54	74.00	-31.46	peak
2	9392.560	60.67	-8.16	52.51	74.00	-21.49	peak
3	11306.760	58.30	-6.51	51.79	74.00	-22.21	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 92 of 244

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

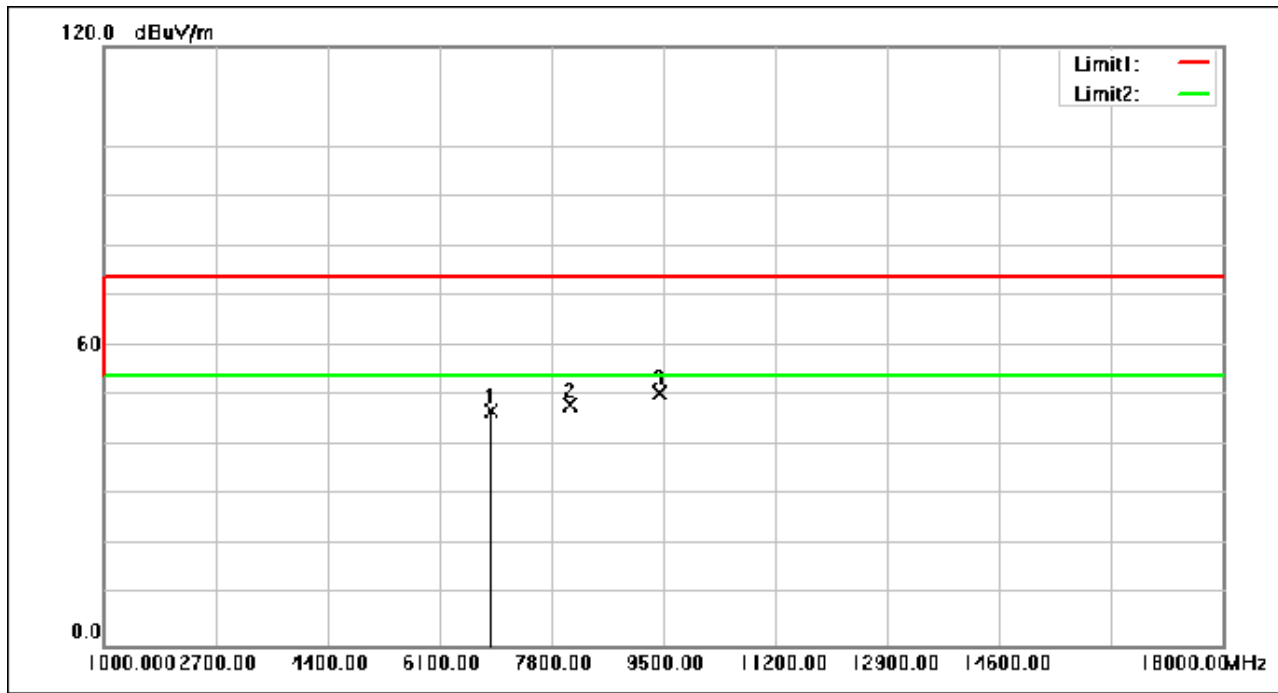

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6894.920	58.66	-11.75	46.91	74.00	-27.09	peak
2	8083.560	58.50	-10.45	48.05	74.00	-25.95	peak
3	9434.720	58.76	-8.07	50.69	74.00	-23.31	peak

7.5 Conducted Average Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2013) Section 11.9.2

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 44.1 % RH

Atmospheric Pressure: 1010 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and Only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

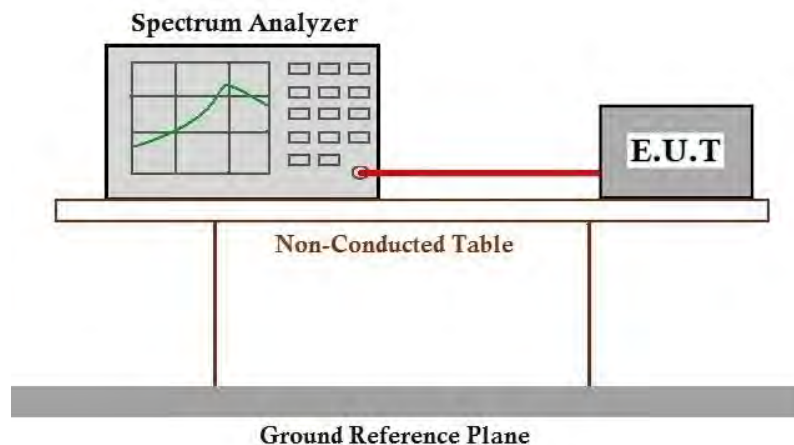



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 94 of 244

7.5.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

7.6 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)

Test Method: ANSI C63.10 (2013) Section 11.8.1

Limit:

≥500 kHz

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 44.1 % RH

Atmospheric Pressure: 1010 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and Only the data of worst case is recorded in the report.

7.6.3 Test Setup Diagram

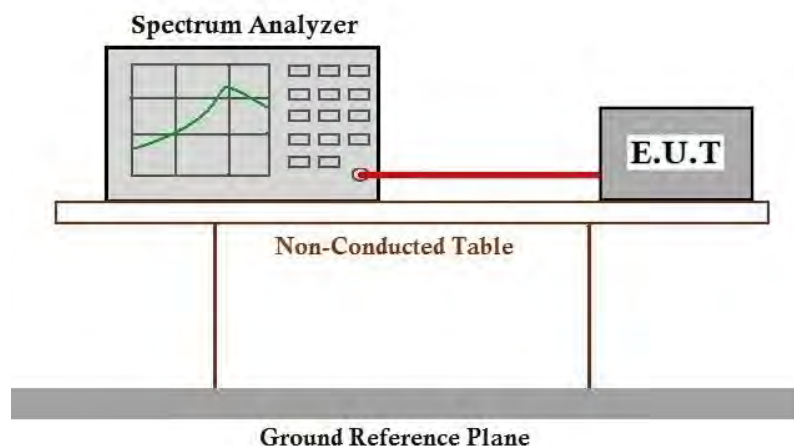

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)

Test Method: ANSI C63.10 (2013) Section 11.10.2

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 44.1 % RH

Atmospheric Pressure: 1010 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and Only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

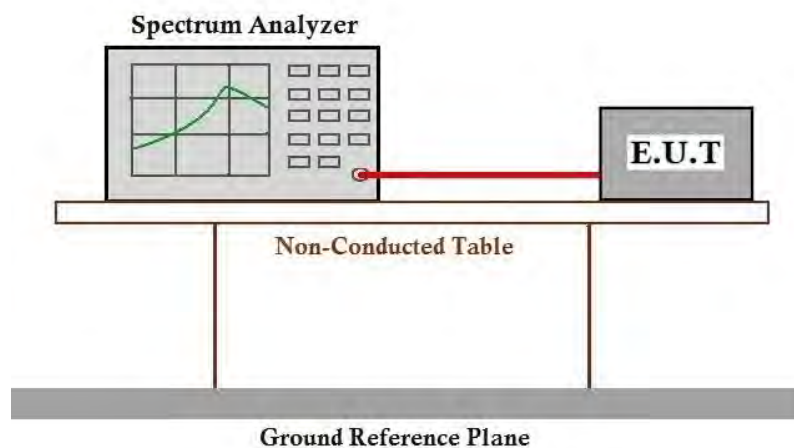

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 97 of 244

7.8 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
 Test Method: ANSI C63.10 (2013) Section 11.13.3.2

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.8.1 E.U.T. Operation


Operating Environment:

Temperature: 25.4 °C Humidity: 44.1 % RH Atmospheric Pressure: 1010 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and Only the data of worst case is recorded in the report.

7.8.3 Test Setup Diagram

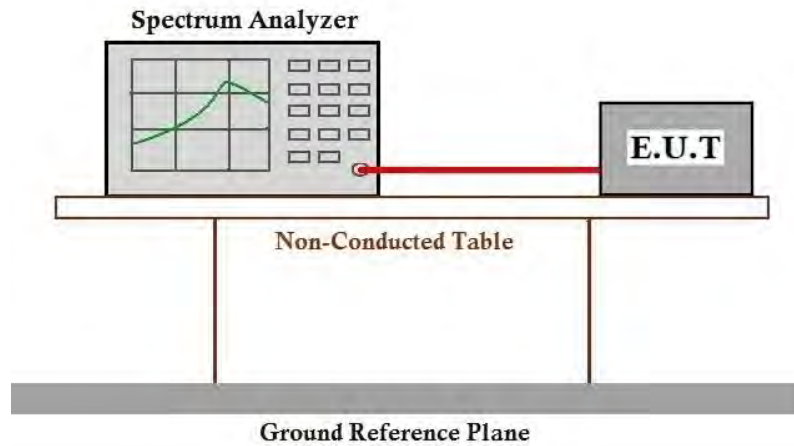

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 99 of 244

7.9 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 44.1 % RH

Atmospheric Pressure: 1010 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and Only the data of worst case is recorded in the report.

7.9.3 Test Setup Diagram

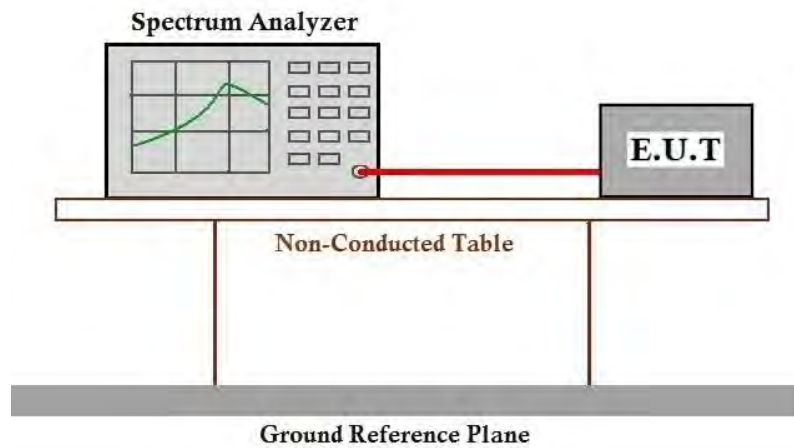

7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.10 99% Bandwidth

Test Requirement RSS-Gen Section 6.7
Test Method: ANSI C63.10 (2013) Section 6.9.3


7.10.1 E.U.T. Operation

Operating Environment:
Temperature: 25.4 °C Humidity: 44.1 % RH Atmospheric Pressure: 1010 mbar

7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and Only the data of worst case is recorded in the report.

7.10.3 Test Setup Diagram

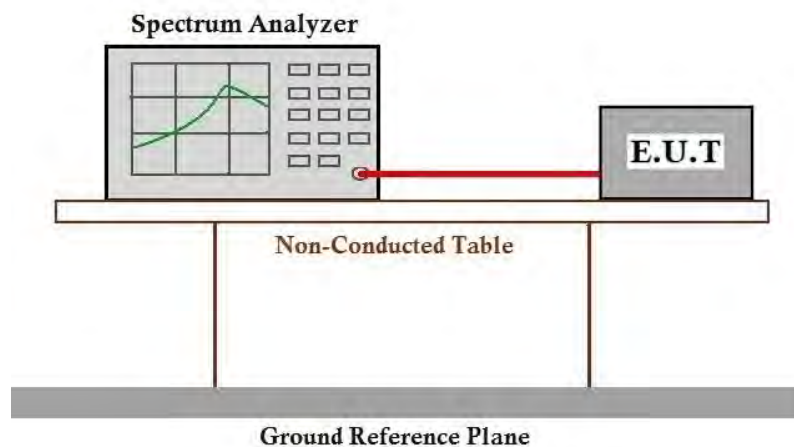

7.10.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 102 of 244

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for KSCR2407001236AT

9 EUT Constructional Details (EUT Photos)

Refer to Appendix - Photographs of EUT Constructional Details for KSCR2407001236AT

10 Appendix

1. Duty Cycle


1.1 Test Result

1.1.1 Ant1


Ant1									
Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11b	SISO	2412	/	/	0.688	0.701	98.15	0.08	0.03
		2437	/	/	0.689	0.701	98.29	0.07	0.03
		2462	/	/	0.689	0.701	98.29	0.07	0.07
802.11g	SISO	2412	/	/	2.097	2.544	82.43	0.84	0.89
		2437	/	/	2.097	2.599	80.68	0.93	2.93
		2462	/	/	2.096	2.598	80.68	0.93	2.94
802.11n (HT20)	MIMO	2412	/	/	5.429	5.931	91.54	0.38	1.40
		2437	/	/	5.429	5.930	91.55	0.38	1.27
		2462	/	/	5.427	5.928	91.55	0.38	1.14
802.11n (HT40)	MIMO	2422	/	/	5.427	5.875	92.37	0.34	1.05
		2437	/	/	5.429	5.875	92.41	0.34	0.85
		2452	/	/	5.430	5.858	92.69	0.33	0.57
802.11ax (HEW20)	MIMO	2412	RU242	Left	5.446	5.948	91.56	0.38	1.13
		2437	RU242	Left	5.444	5.884	92.52	0.34	0.13
		2462	RU242	Left	5.446	5.948	91.56	0.38	1.26
802.11ax (HEW40)	MIMO	2422	RU484	Left	5.446	5.911	92.13	0.36	1.28
		2437	RU484	Left	5.446	5.911	92.13	0.36	1.14
		2452	RU484	Left	5.447	5.893	92.43	0.34	0.98

1.2 Test Graph


1.2.1 Ant1

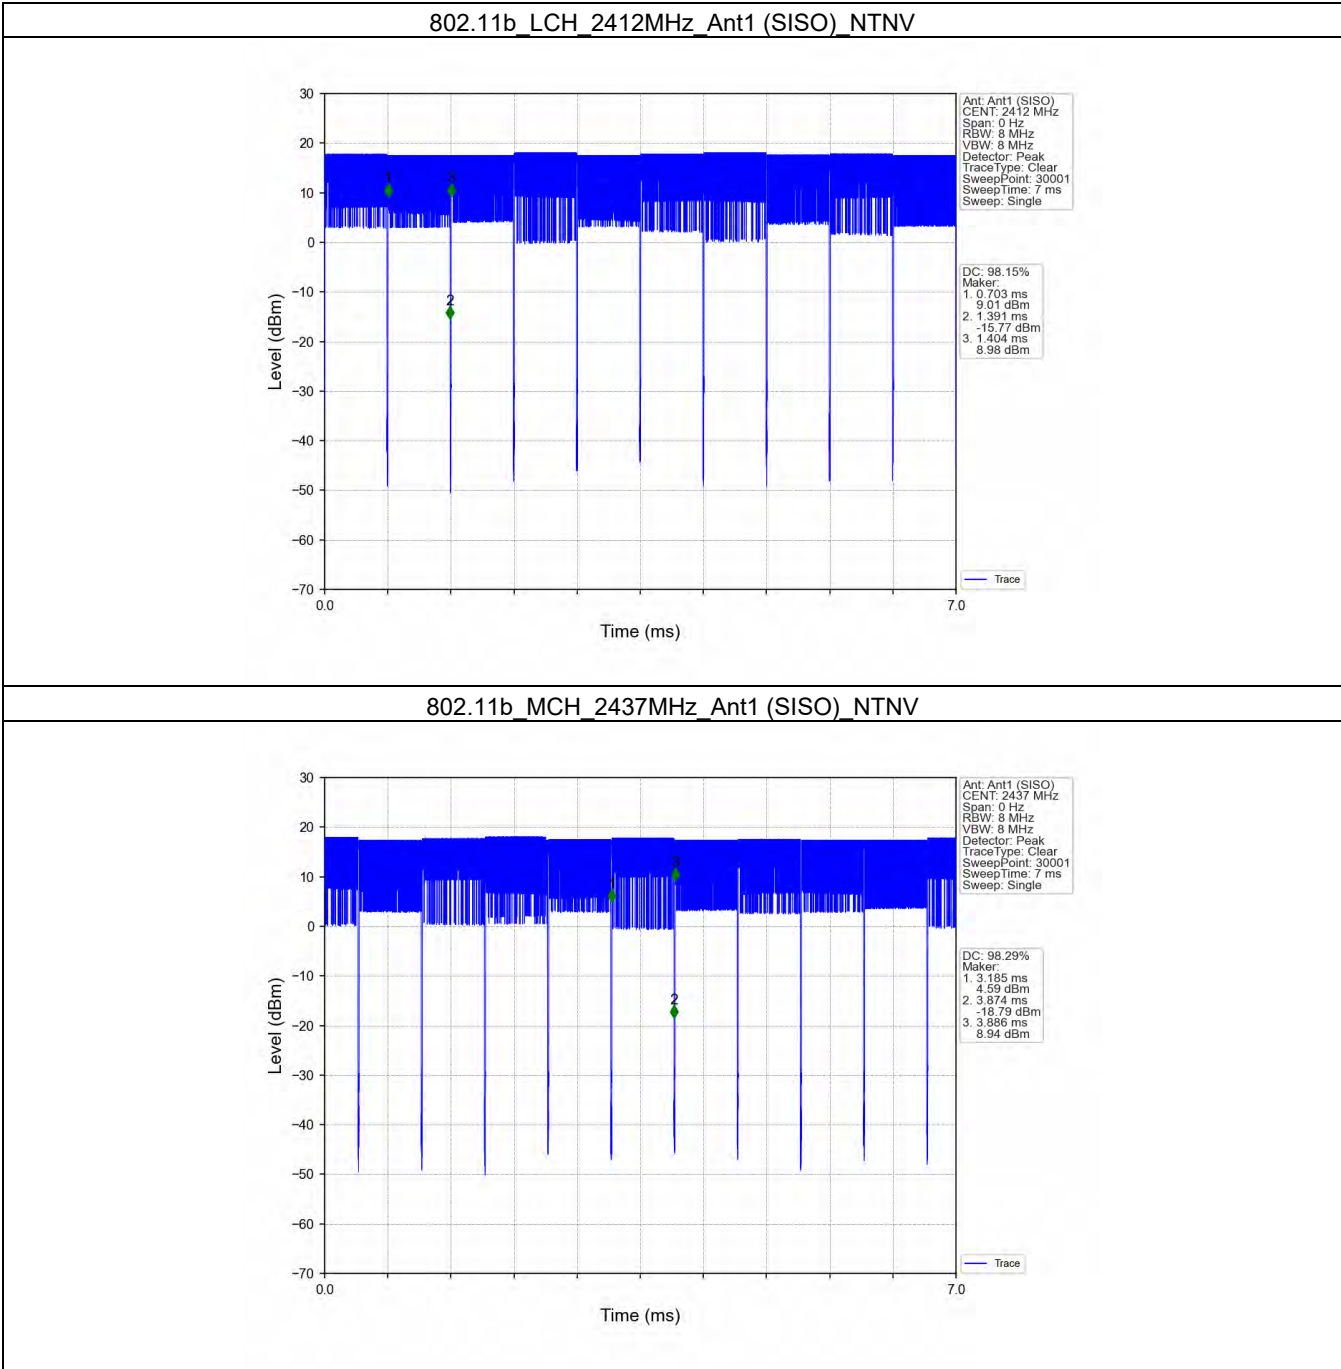


802.11b HCH 2462MHz Ant1 (SISO) NTN

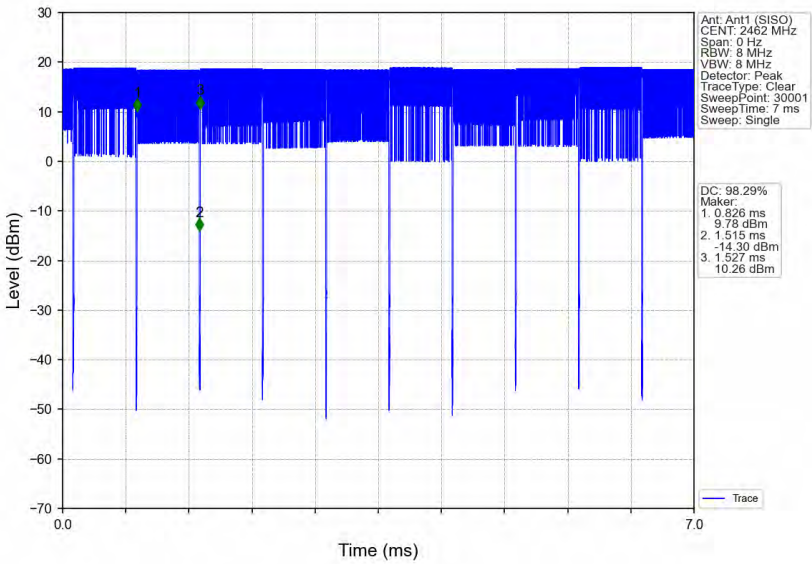


802.11g LCH 2412MHz Ant1 (SISO) NTN

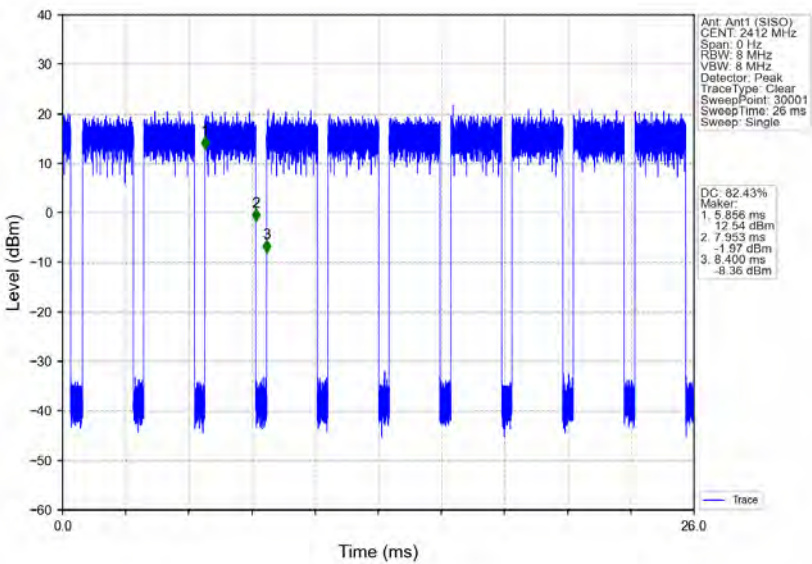


802.11g_MCH_2437MHz_Ant1 (SISO) NTN

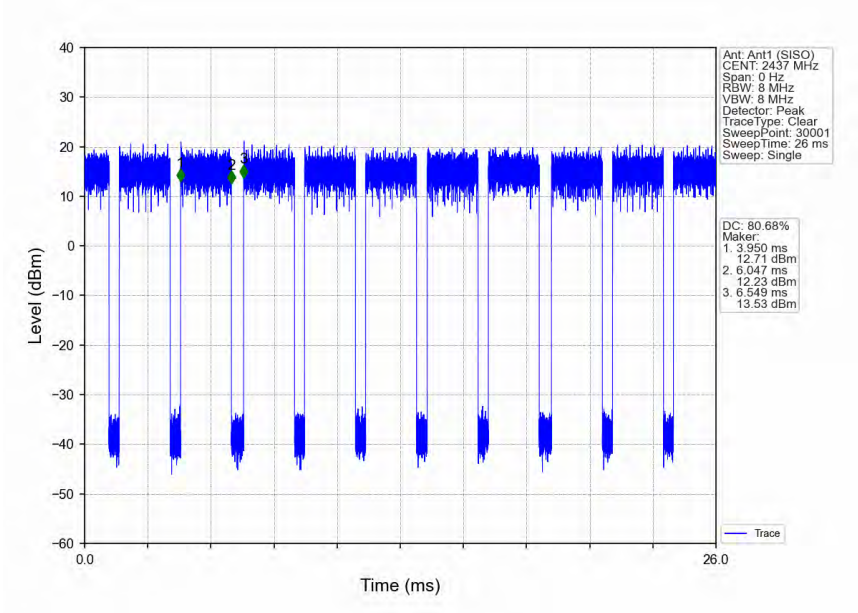


802.11g_HCH_2462MHz_Ant1 (SISO) NTN

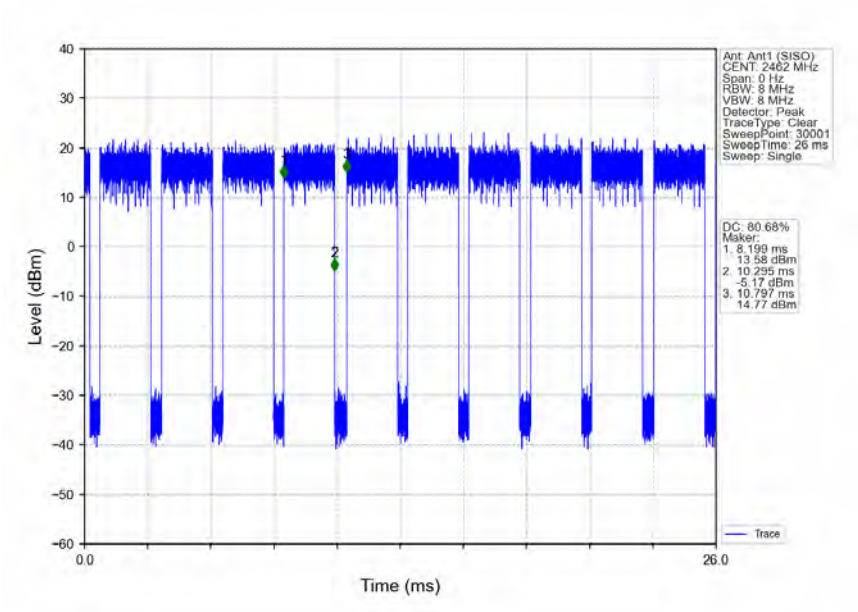


802.11n(HT20) LCH 2412MHz Ant1 (MIMO) NTN

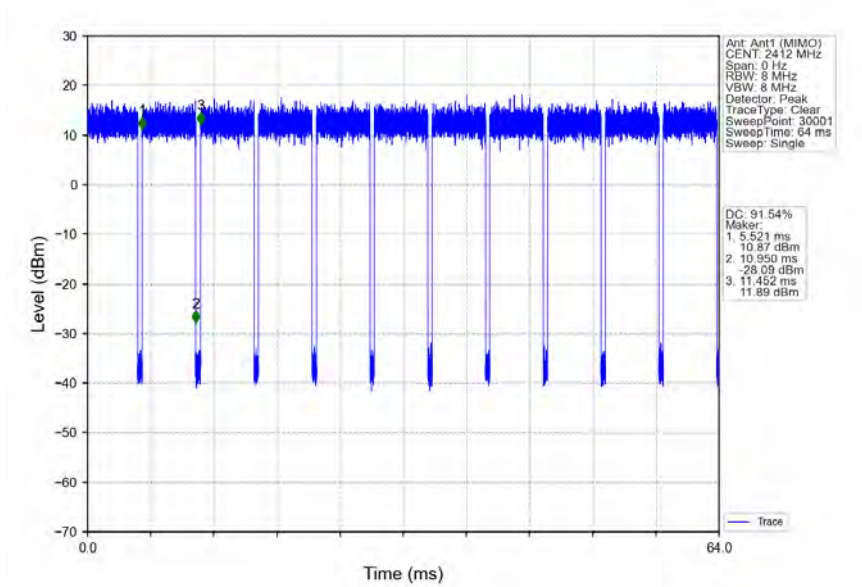


802.11n(HT20) MCH 2437MHz Ant1 (MIMO) NTN

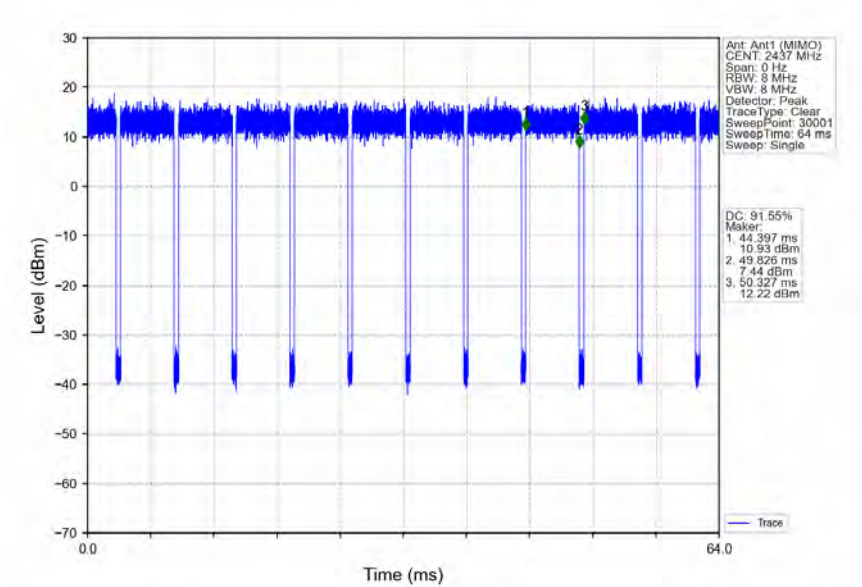

802.11n(HT20) HCH 2462MHz Ant1 (MIMO) NTN

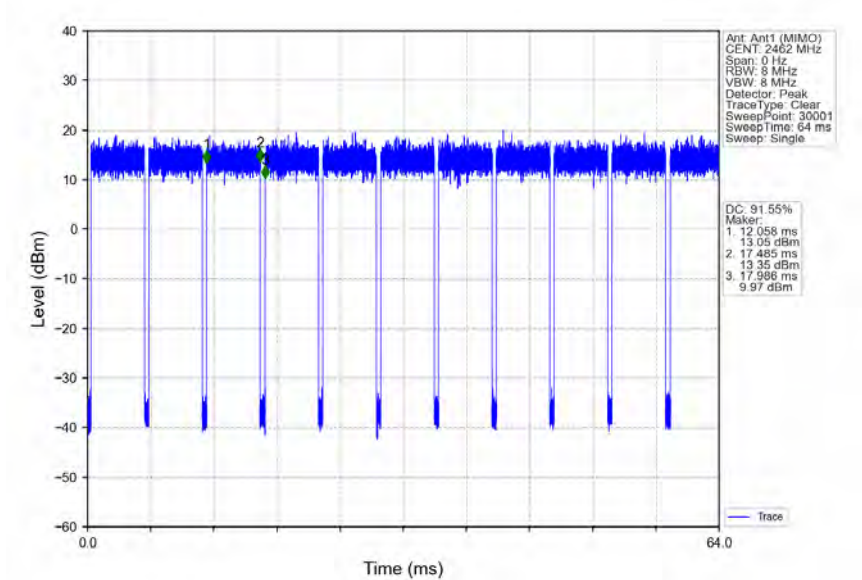

802.11n(HT40) LCH 2422MHz Ant1 (MIMO) NTN

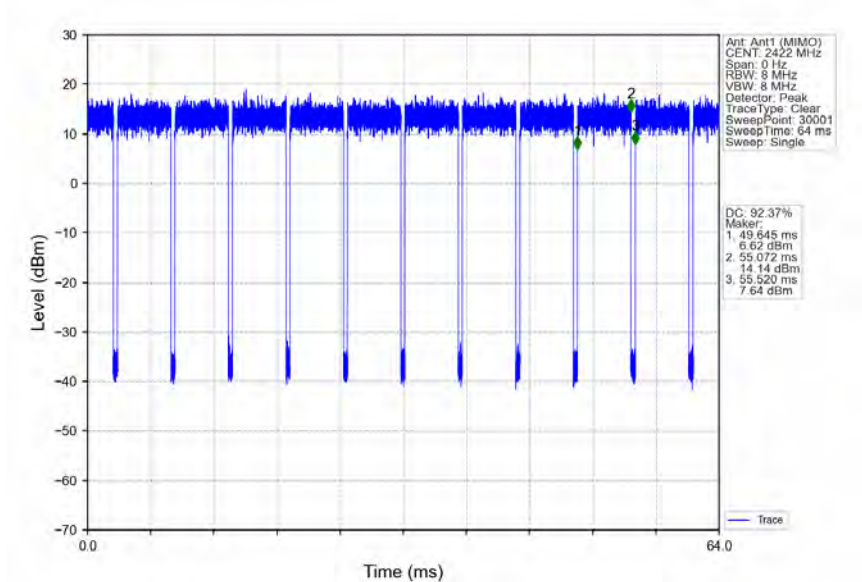


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 109 of 244

802.11n(HT40) MCH 2437MHz Ant1 (MIMO) NTN

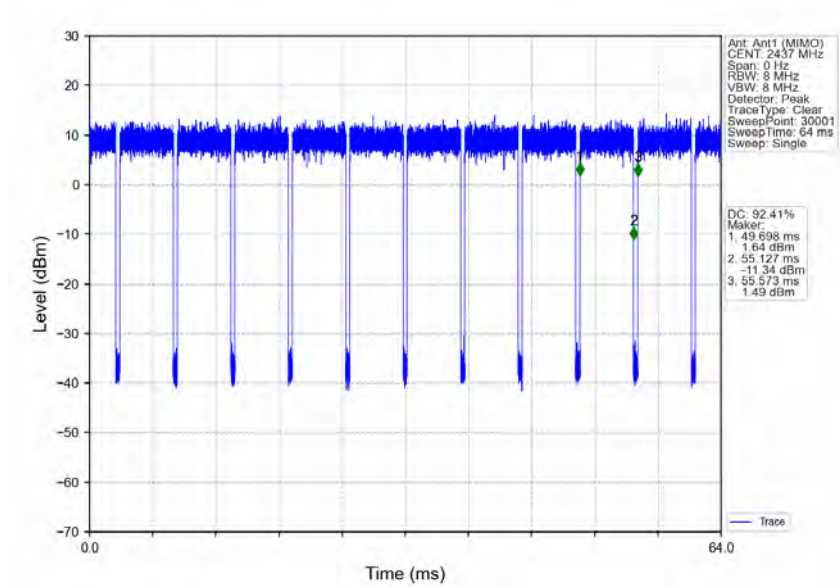

802.11n(HT40) HCH 2452MHz Ant1 (MIMO) NTN

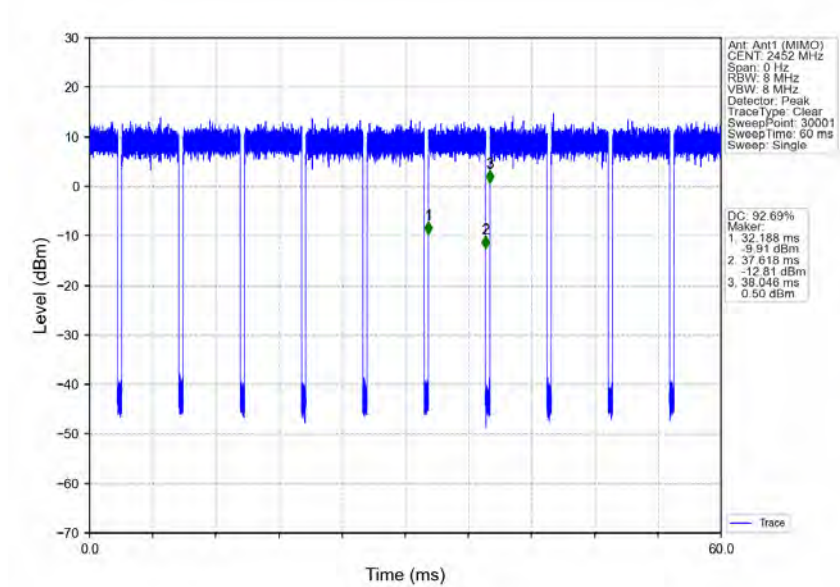


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 110 of 244


802.11ax(HEW20) LCH 2412MHz RU242 Left Ant1 (MIMO) NTN

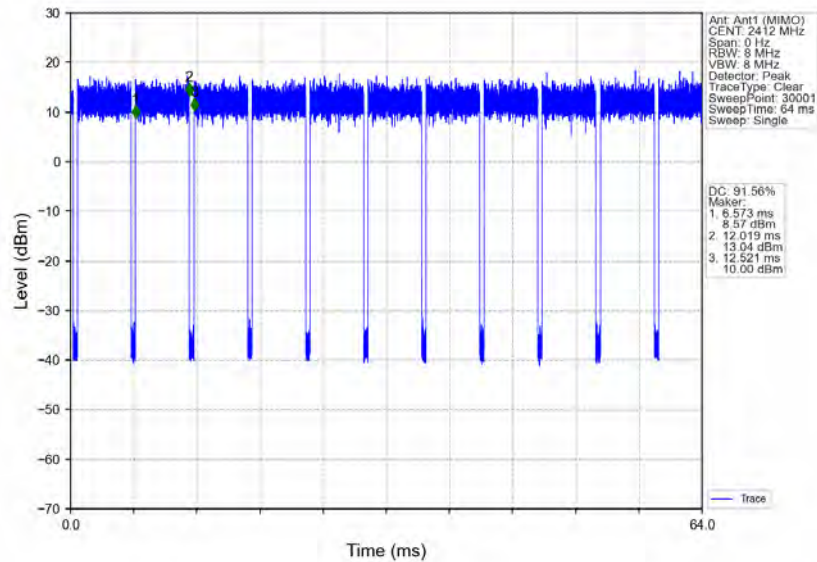


802.11ax(HEW20) MCH 2437MHz RU242 Left Ant1 (MIMO) NTN

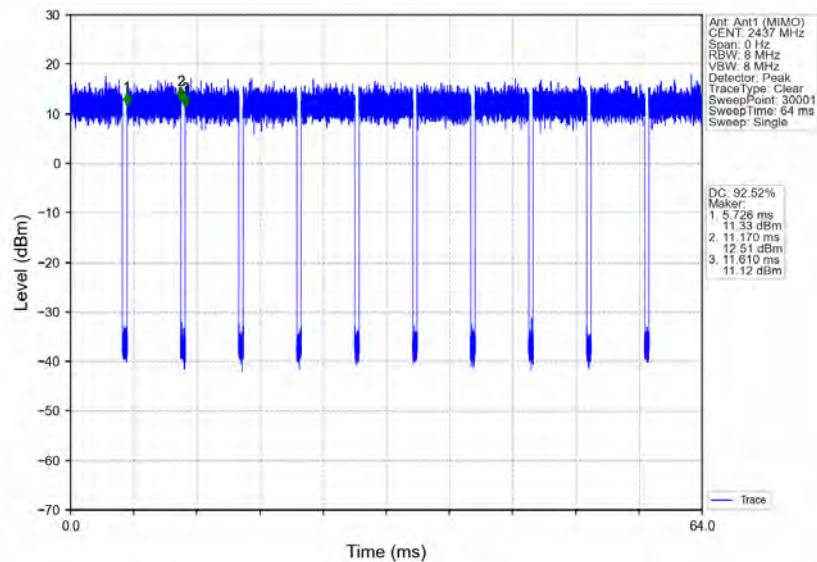


802.11ax(HEW20) HCH 2462MHz RU242 Left Ant1 (MIMO) NTN

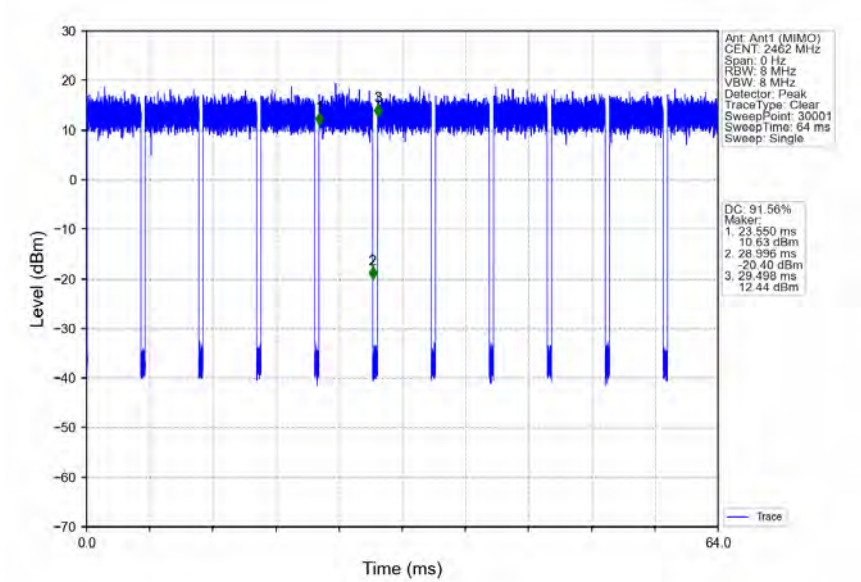


802.11ax(HEW40) LCH 2422MHz RU484 Left Ant1 (MIMO) NTN

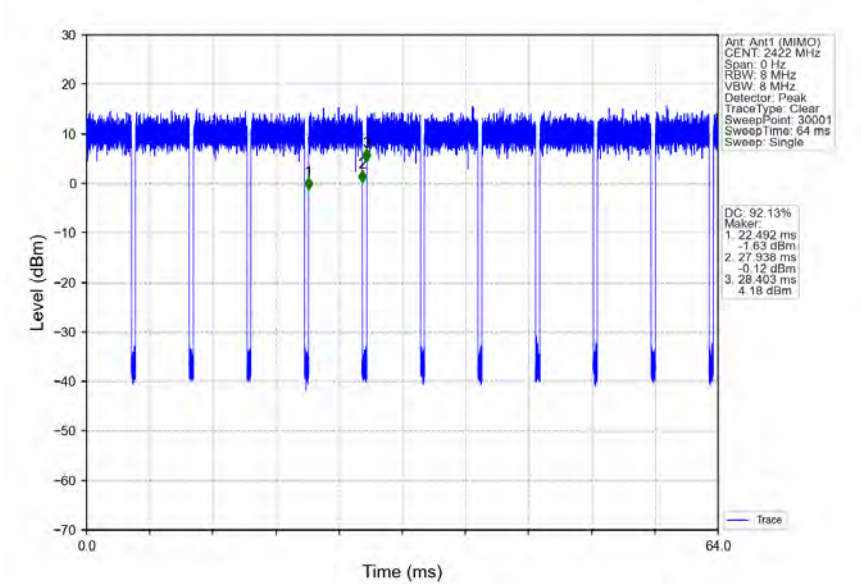

802.11ax(HEW40) MCH 2437MHz RU484 Left Ant1 (MIMO) NTN

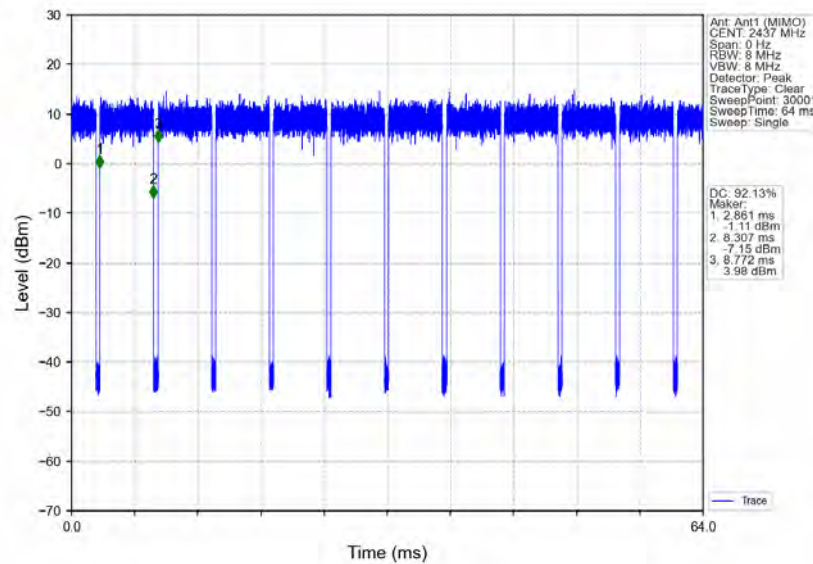

802.11ax(HEW40) HCH 2452MHz RU484 Left Ant1 (MIMO) NTN

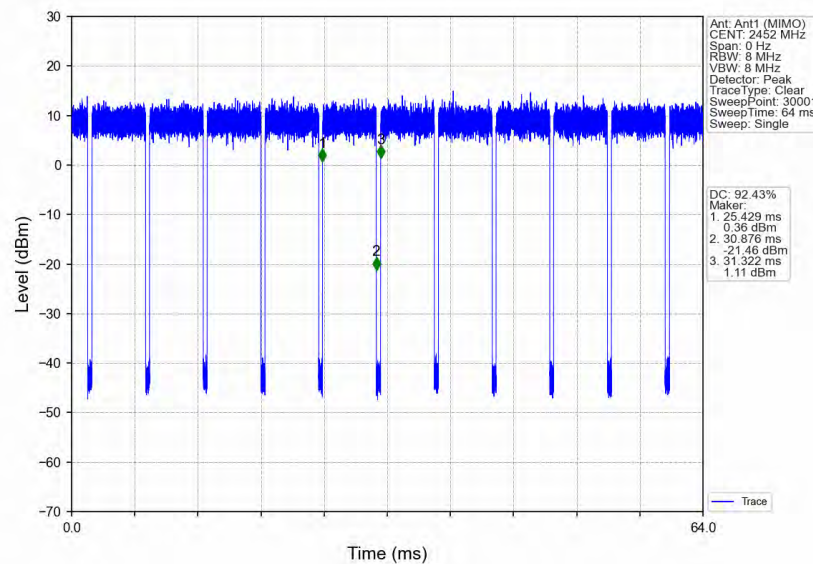

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 113 of 244

2. Bandwidth

2.1 Test Result

2.1.1 OBW

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
						Result	Limit	
802.11b	SISO	2412	/	/	1	13.483	/	Pass
					2	13.075	/	Pass
		2437	/	/	1	13.314	/	Pass
					2	13.003	/	Pass
		2462	/	/	1	12.826	/	Pass
					2	13.180	/	Pass
802.11g	SISO	2412	/	/	1	16.871	/	Pass
					2	16.696	/	Pass
		2437	/	/	1	16.937	/	Pass
					2	16.674	/	Pass
		2462	/	/	1	16.748	/	Pass
					2	16.792	/	Pass
802.11n (HT20)	MIMO	2412	/	/	1	18.006	/	Pass
					2	17.850	/	Pass
		2437	/	/	1	17.959	/	Pass
					2	17.839	/	Pass
		2462	/	/	1	17.828	/	Pass
					2	17.942	/	Pass
802.11n (HT40)	MIMO	2422	/	/	1	35.832	/	Pass
					2	36.064	/	Pass
		2437	/	/	1	36.253	/	Pass
					2	36.044	/	Pass
		2452	/	/	1	36.486	/	Pass
					2	36.343	/	Pass
802.11ax (HEW20)	MIMO	2412	RU242	Left	1	19.097	/	Pass
					2	19.050	/	Pass
		2437	RU242	Left	1	19.086	/	Pass
					2	18.992	/	Pass
		2462	RU242	Left	1	19.013	/	Pass
					2	19.088	/	Pass
802.11ax (HEW40)	MIMO	2422	RU484	Left	1	37.637	/	Pass
					2	37.824	/	Pass
		2437	RU484	Left	1	37.932	/	Pass
					2	37.728	/	Pass
		2452	RU484	Left	1	38.091	/	Pass
					2	37.961	/	Pass

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 114 of 244


2.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	6dB Bandwidth (MHz)		Verdict
						Result	Limit	
802.11b	SISO	2412	/	/	1	8.593	≥ 0.5	Pass
					2	8.078	≥ 0.5	Pass
		2437	/	/	1	8.566	≥ 0.5	Pass
					2	8.105	≥ 0.5	Pass
		2462	/	/	1	8.086	≥ 0.5	Pass
					2	8.131	≥ 0.5	Pass
802.11g	SISO	2412	/	/	1	15.977	≥ 0.5	Pass
					2	16.347	≥ 0.5	Pass
		2437	/	/	1	15.783	≥ 0.5	Pass
					2	16.390	≥ 0.5	Pass
		2462	/	/	1	16.065	≥ 0.5	Pass
					2	16.413	≥ 0.5	Pass
802.11n (HT20)	MIMO	2412	/	/	1	16.750	≥ 0.5	Pass
					2	16.695	≥ 0.5	Pass
		2437	/	/	1	16.593	≥ 0.5	Pass
					2	17.211	≥ 0.5	Pass
		2462	/	/	1	17.339	≥ 0.5	Pass
					2	17.611	≥ 0.5	Pass
802.11n (HT40)	MIMO	2422	/	/	1	35.101	≥ 0.5	Pass
					2	35.733	≥ 0.5	Pass
		2437	/	/	1	35.501	≥ 0.5	Pass
					2	33.878	≥ 0.5	Pass
		2452	/	/	1	36.010	≥ 0.5	Pass
					2	35.767	≥ 0.5	Pass
802.11ax (HEW20)	MIMO	2412	RU242	Left	1	18.634	≥ 0.5	Pass
					2	17.593	≥ 0.5	Pass
		2437	RU242	Left	1	18.602	≥ 0.5	Pass
					2	18.694	≥ 0.5	Pass
		2462	RU242	Left	1	18.893	≥ 0.5	Pass
					2	18.970	≥ 0.5	Pass
802.11ax (HEW40)	MIMO	2422	RU484	Left	1	36.069	≥ 0.5	Pass
					2	36.547	≥ 0.5	Pass
		2437	RU484	Left	1	37.453	≥ 0.5	Pass
					2	35.910	≥ 0.5	Pass
		2452	RU484	Left	1	38.058	≥ 0.5	Pass
					2	37.655	≥ 0.5	Pass


2.2 Test Graph

2.2.1 OBW

802.11b_LCH_2412MHz_Ant1 (SISO)_NTNV

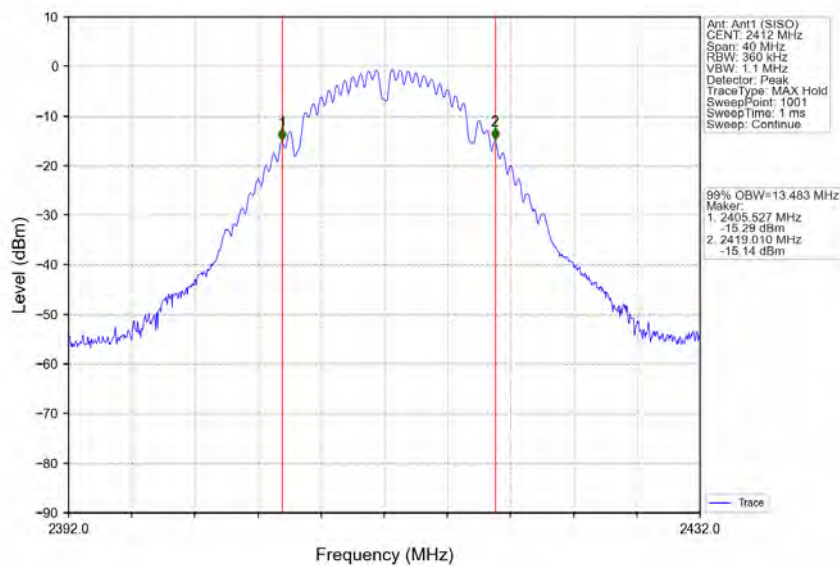

802.11b_LCH_2412MHz_Ant2 (SISO)_NTNV

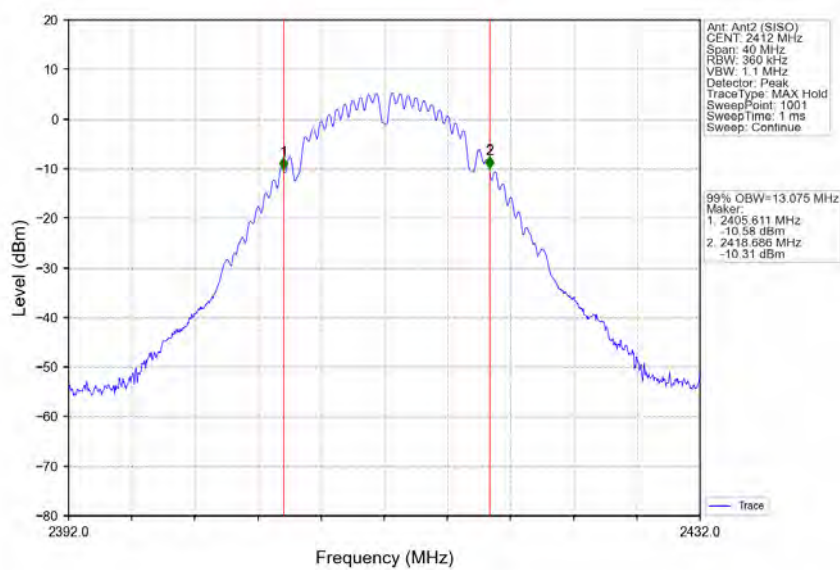


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 116 of 244


802.11b MCH 2437MHz Ant1 (SISO) NTN

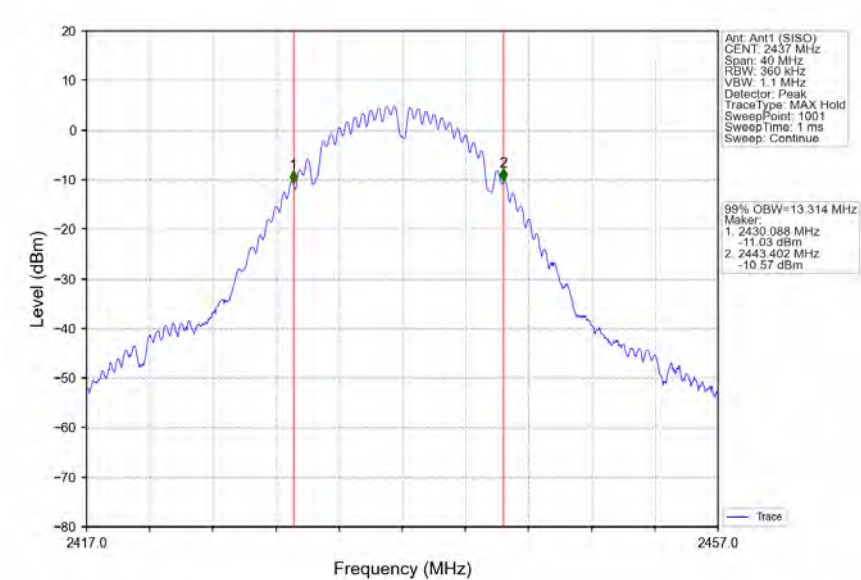


802.11b MCH 2437MHz Ant2 (SISO) NTN

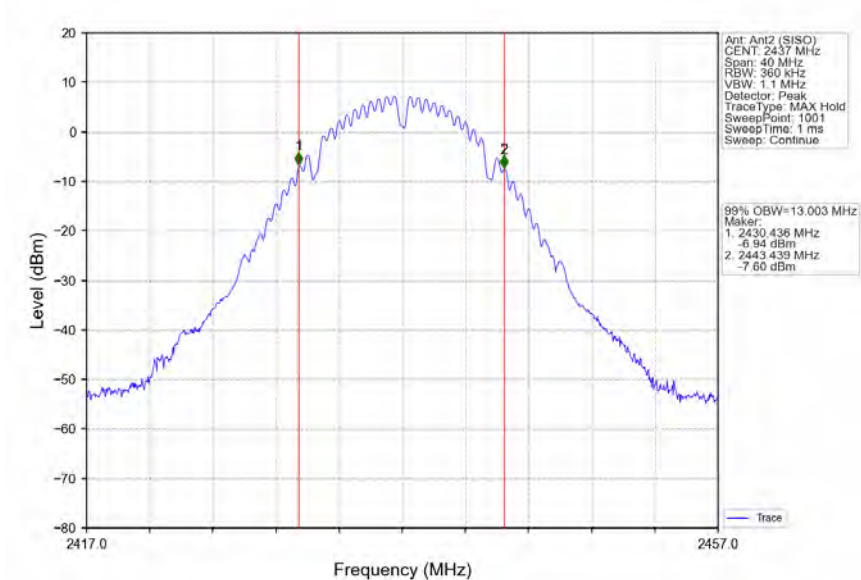

802.11b HCH 2462MHz Ant1 (SISO) NTN

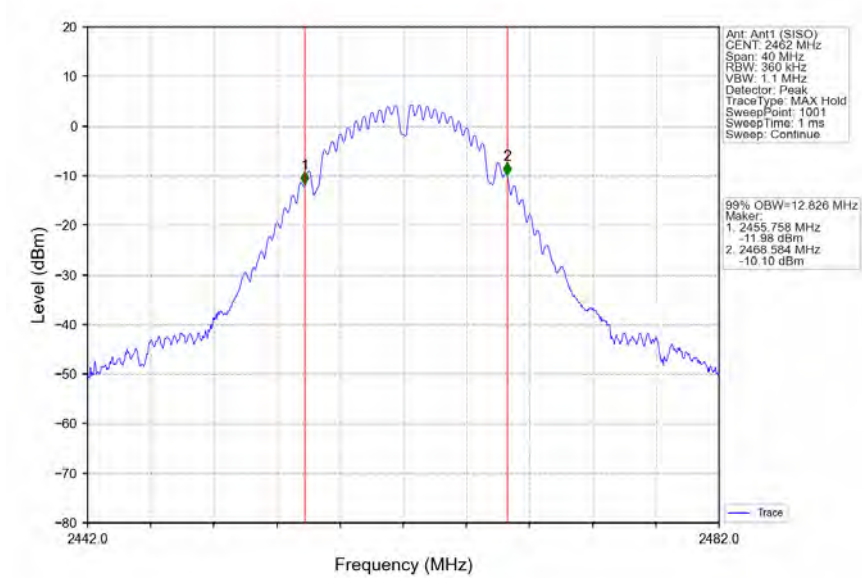

802.11b HCH 2462MHz Ant2 (SISO) NTN

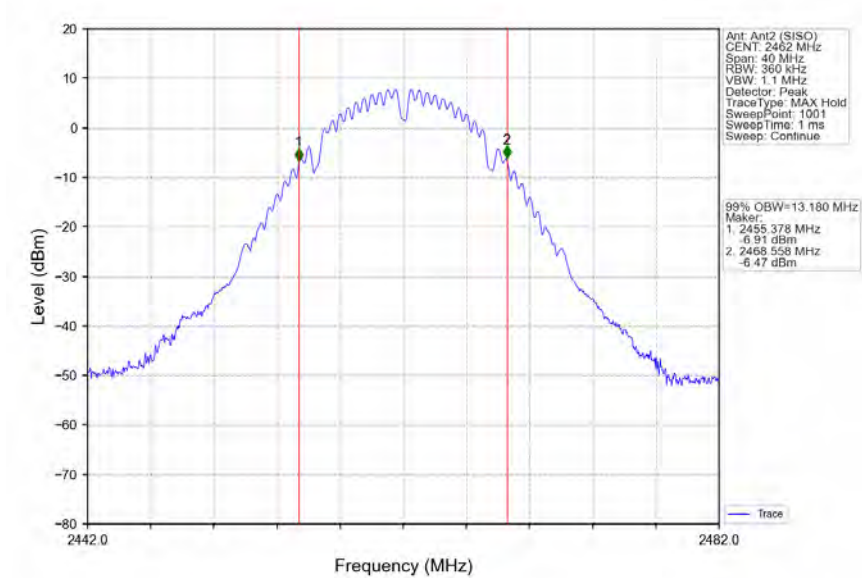


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 118 of 244

802.11g LCH 2412MHz Ant1 (SISO) NTN

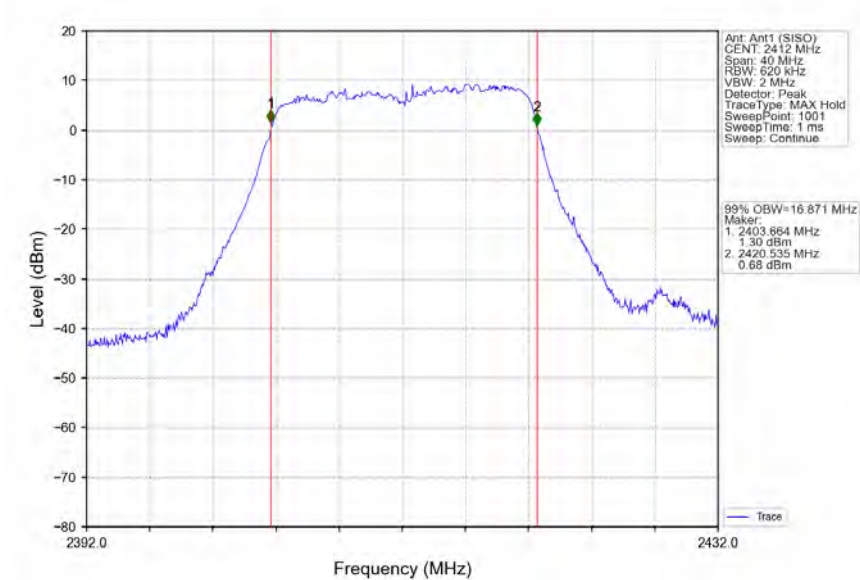

802.11g LCH 2412MHz Ant2 (SISO) NTN

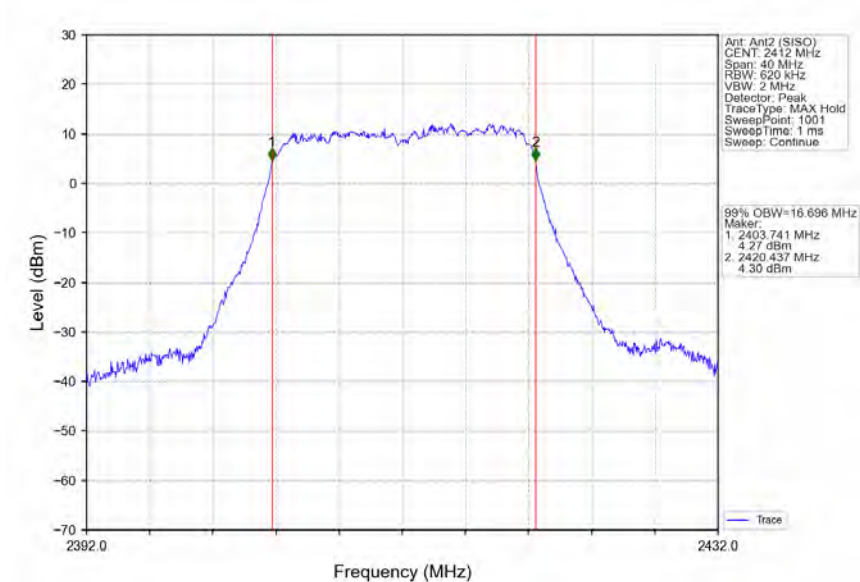


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 119 of 244


802.11g MCH 2437MHz Ant1 (SISO) NTN

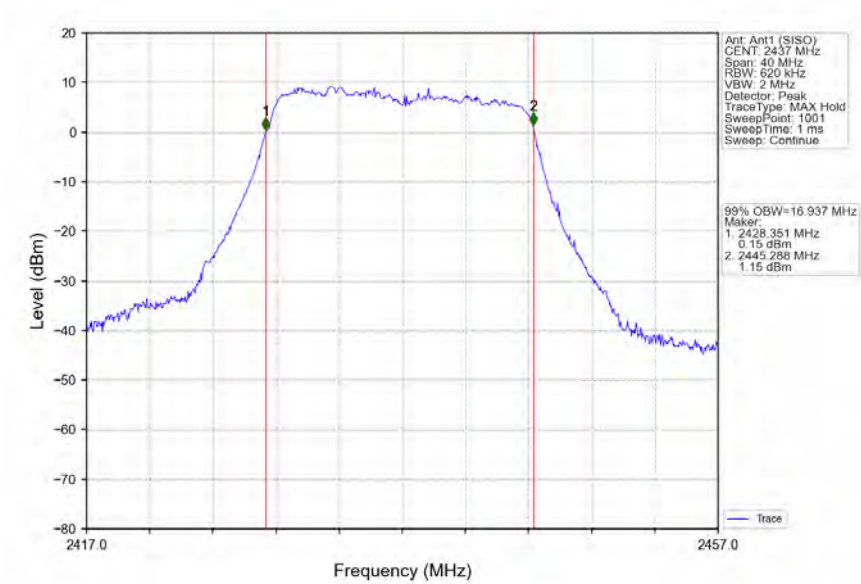


802.11g MCH 2437MHz Ant2 (SISO) NTN

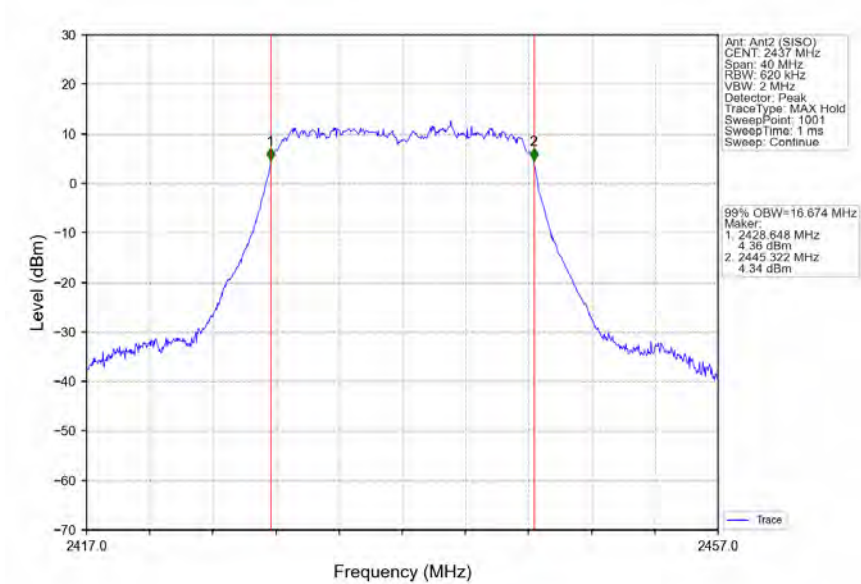

802.11g_HCH_2462MHz_Ant1 (SISO) NTN

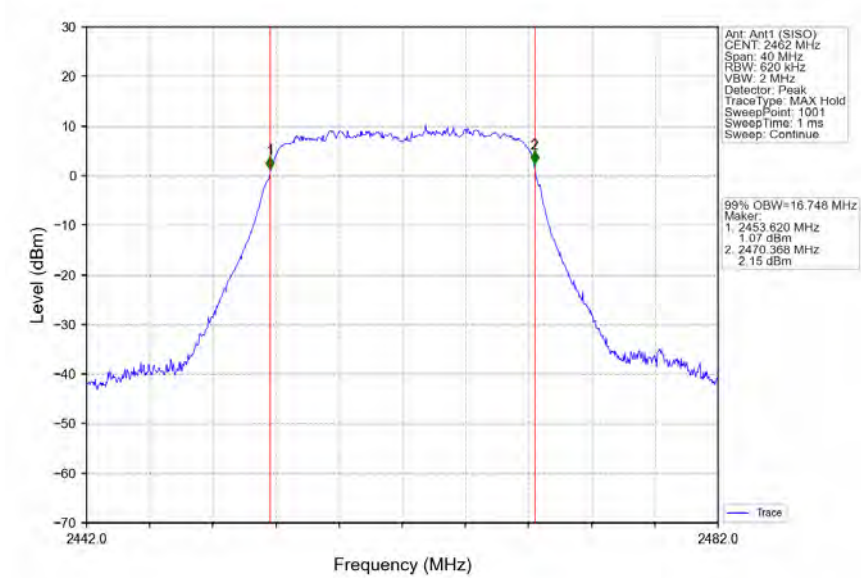

802.11g_HCH_2462MHz_Ant2 (SISO) NTN

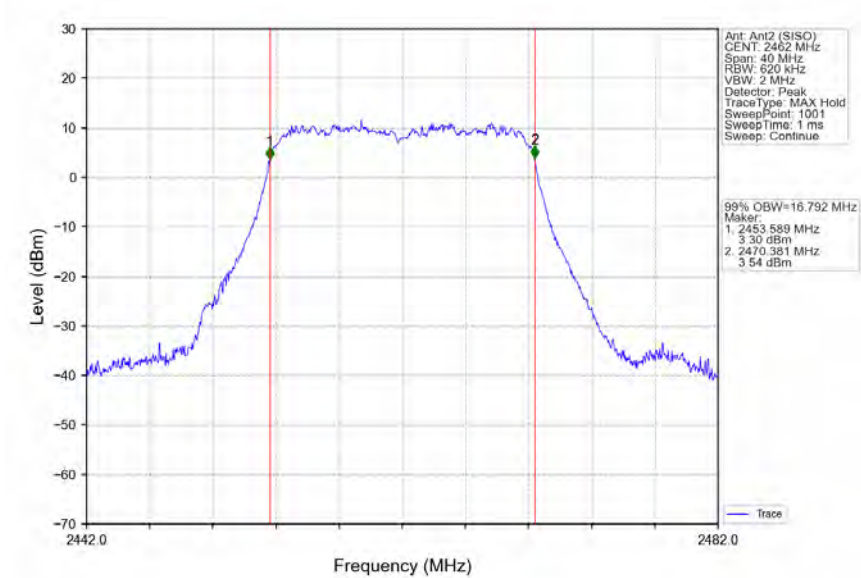


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 121 of 244


802.11n(HT20) LCH 2412MHz Ant1 (MIMO) NTN

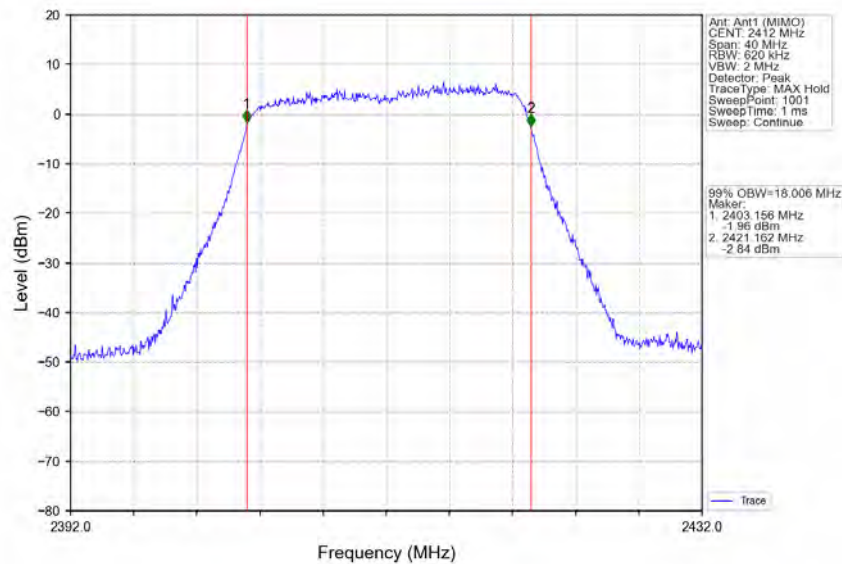


802.11n(HT20) LCH 2412MHz Ant2 (MIMO) NTN

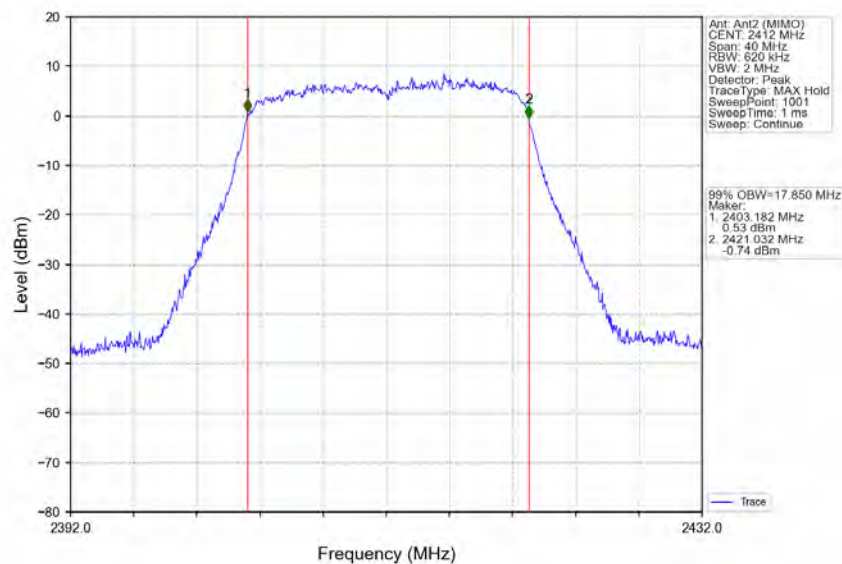


802.11n(HT20) MCH 2437MHz Ant1 (MIMO) NTN

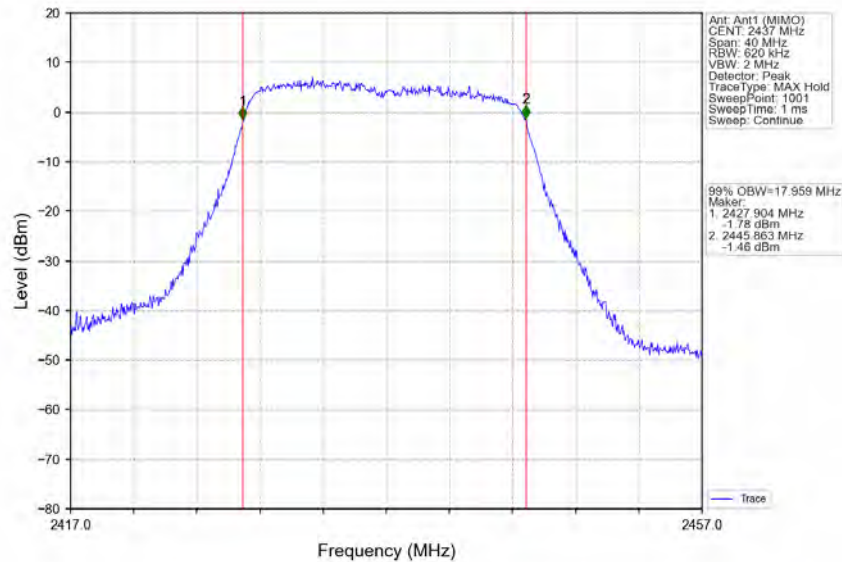


802.11n(HT20) MCH 2437MHz Ant2 (MIMO) NTN

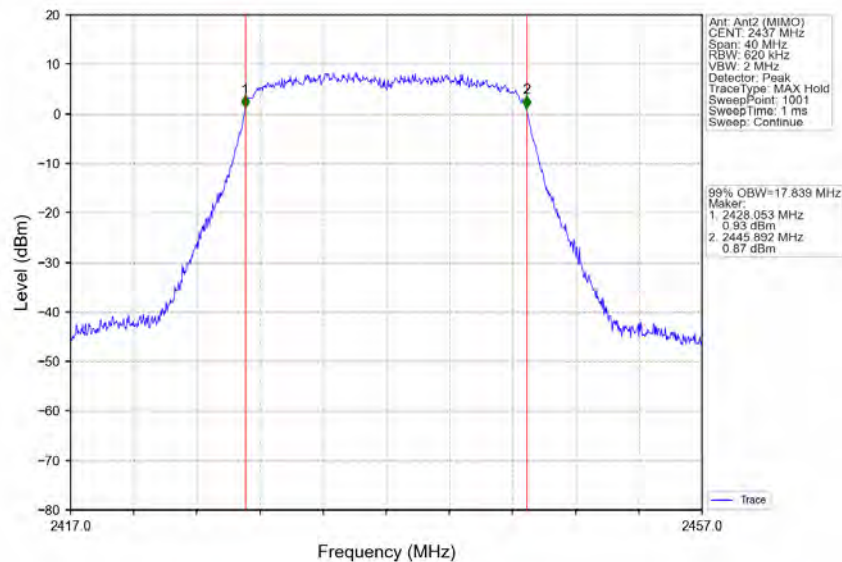


802.11n(HT20) HCH 2462MHz Ant1 (MIMO) NTN

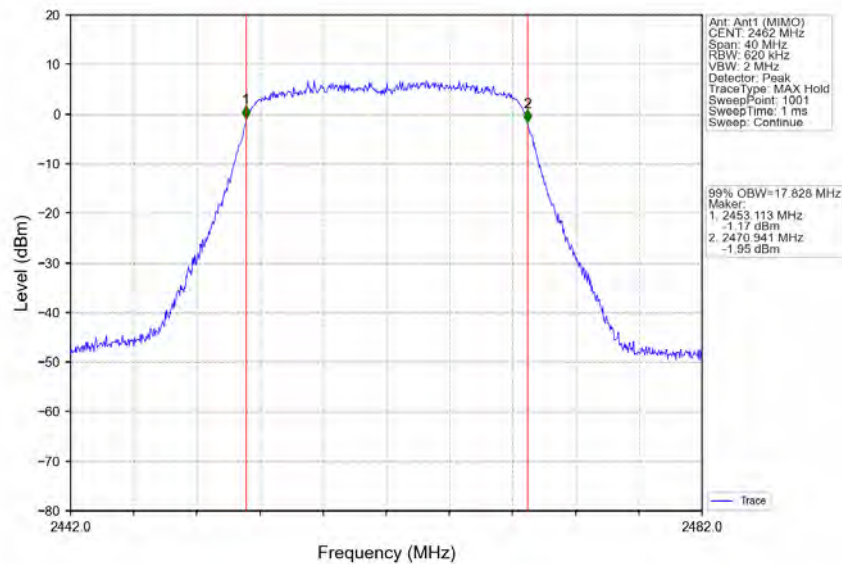


802.11n(HT20) HCH 2462MHz Ant2 (MIMO) NTN

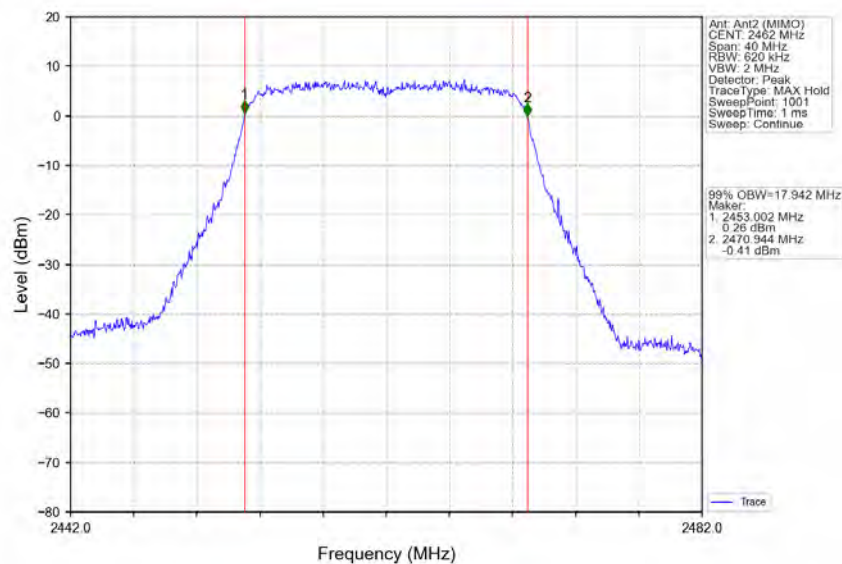

802.11n(HT40) LCH 2422MHz Ant1 (MIMO) NTN

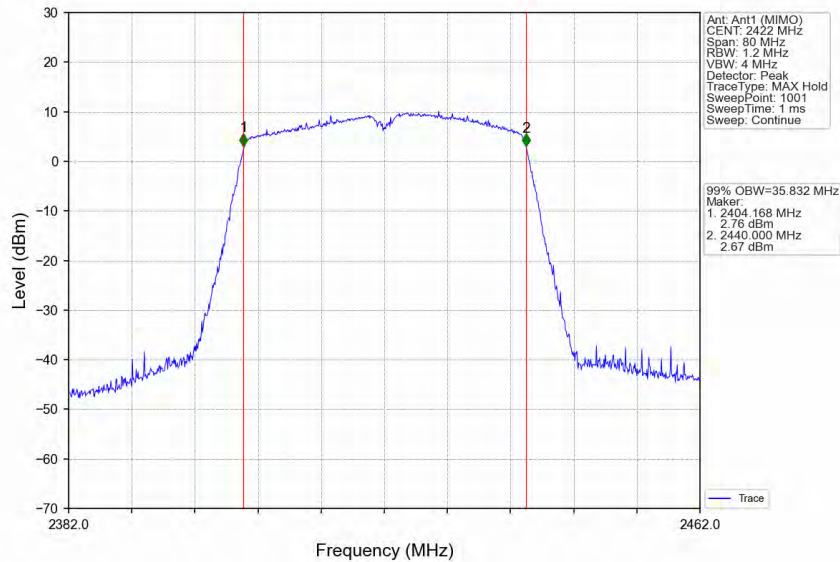

802.11n(HT40) LCH 2422MHz Ant2 (MIMO) NTN

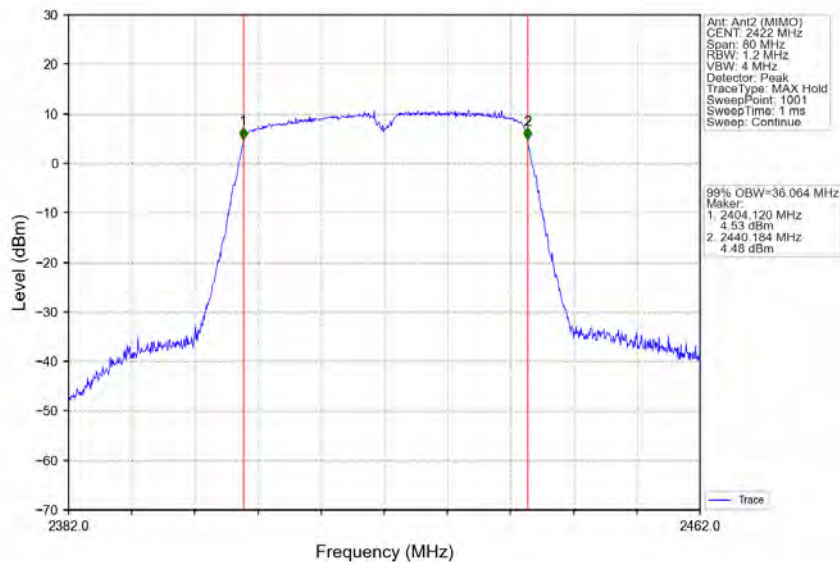


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 125 of 244

802.11n(HT40) MCH 2437MHz Ant1 (MIMO) NTN

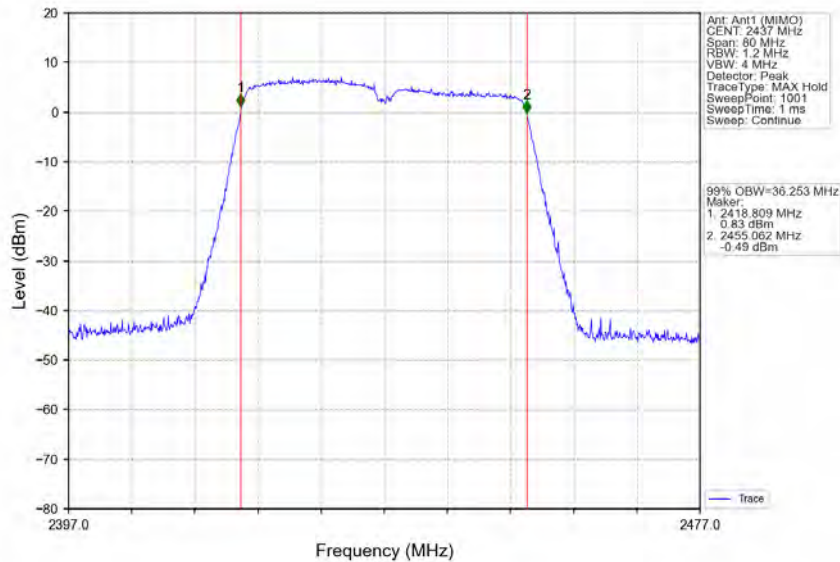

802.11n(HT40) MCH 2437MHz Ant2 (MIMO) NTN

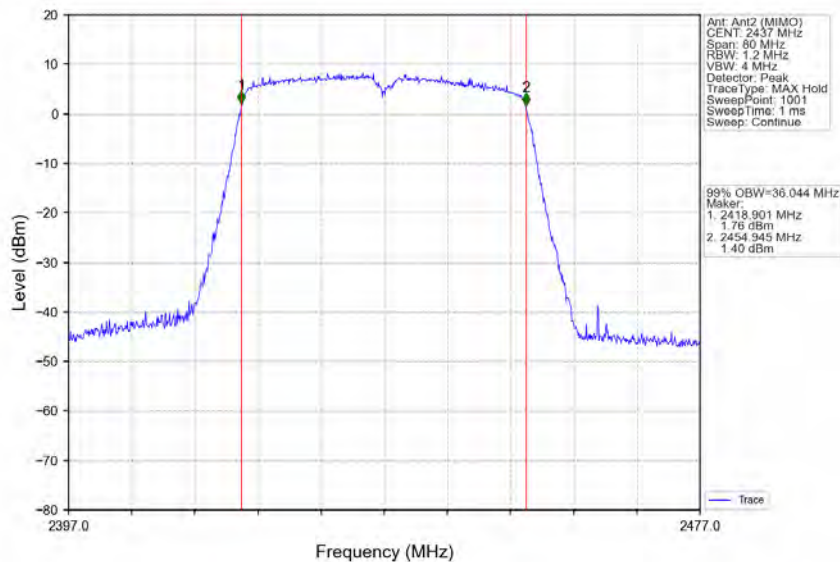


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 126 of 244


802.11n(HT40) HCH 2452MHz Ant1 (MIMO) NTN

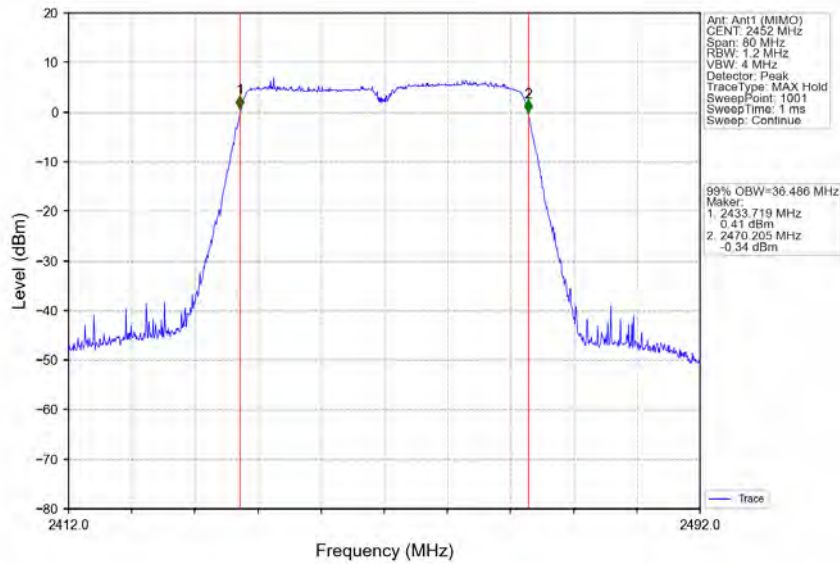


802.11n(HT40) HCH 2452MHz Ant2 (MIMO) NTN

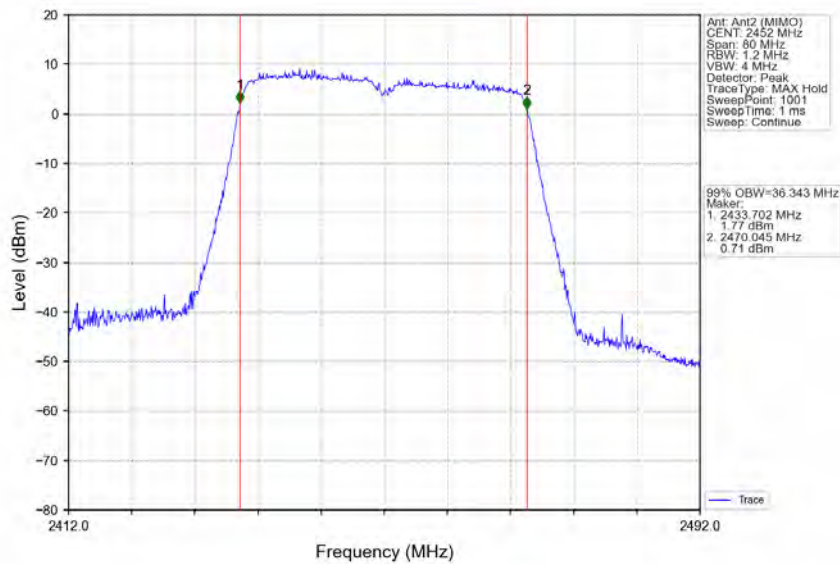

802.11ax(HEW20) LCH 2412MHz RU242 Left Ant1 (MIMO) NTNv

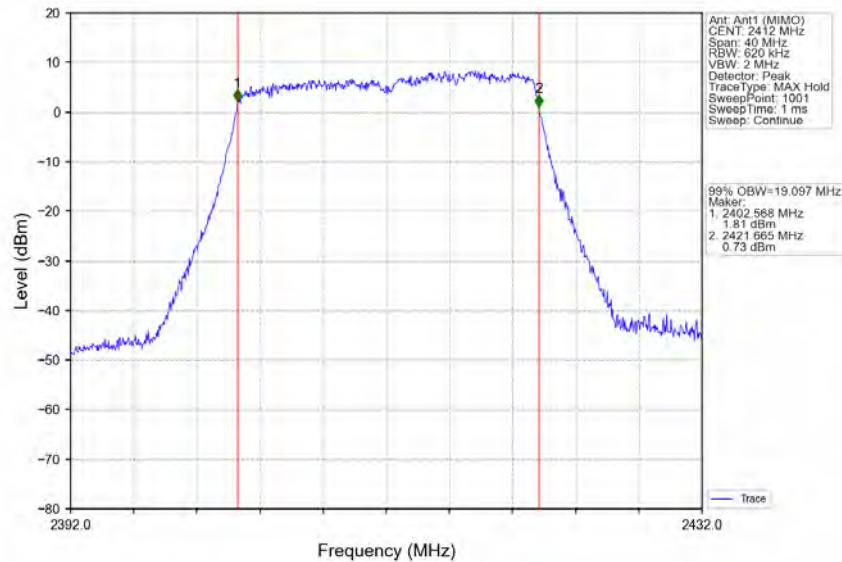

802.11ax(HEW20) LCH 2412MHz RU242 Left Ant2 (MIMO) NTNv

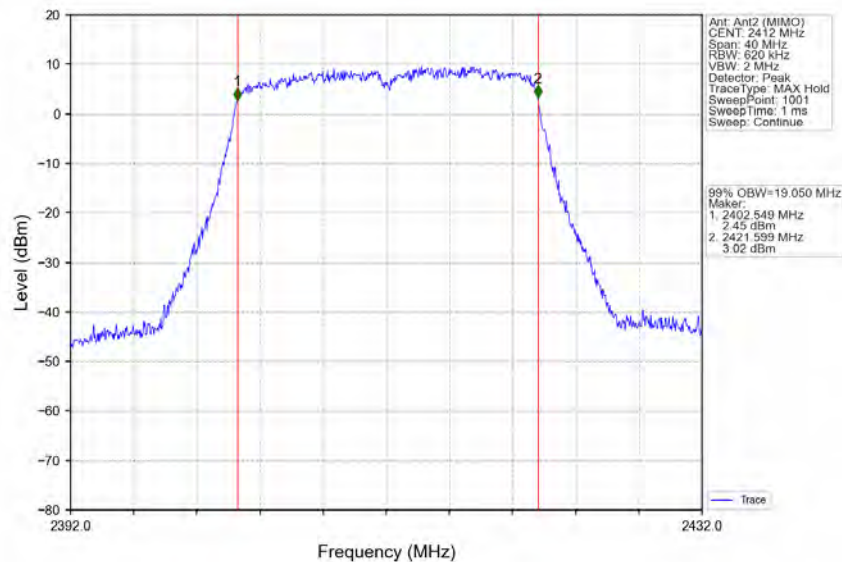


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 128 of 244


802.11ax(HEW20) MCH_2437MHz RU242 Left Ant1 (MIMO) NTN

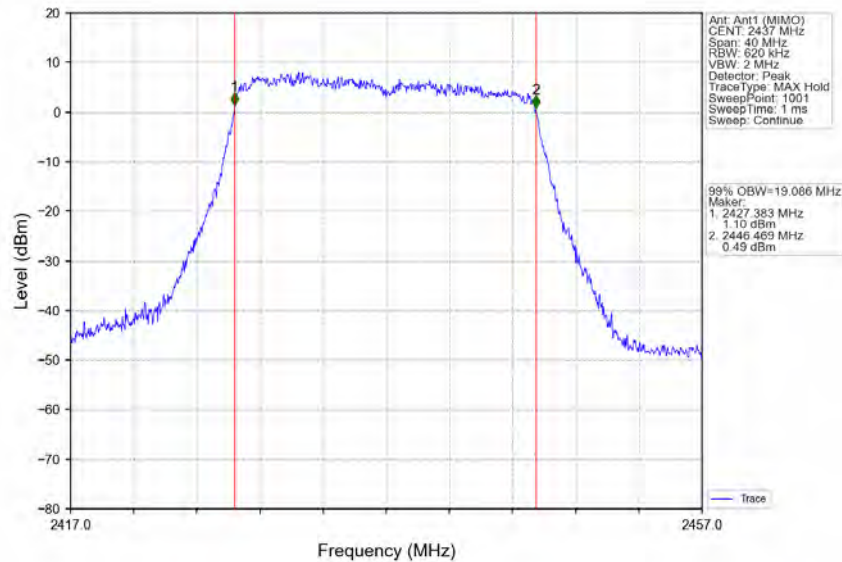


802.11ax(HEW20) MCH_2437MHz RU242 Left Ant2 (MIMO) NTN

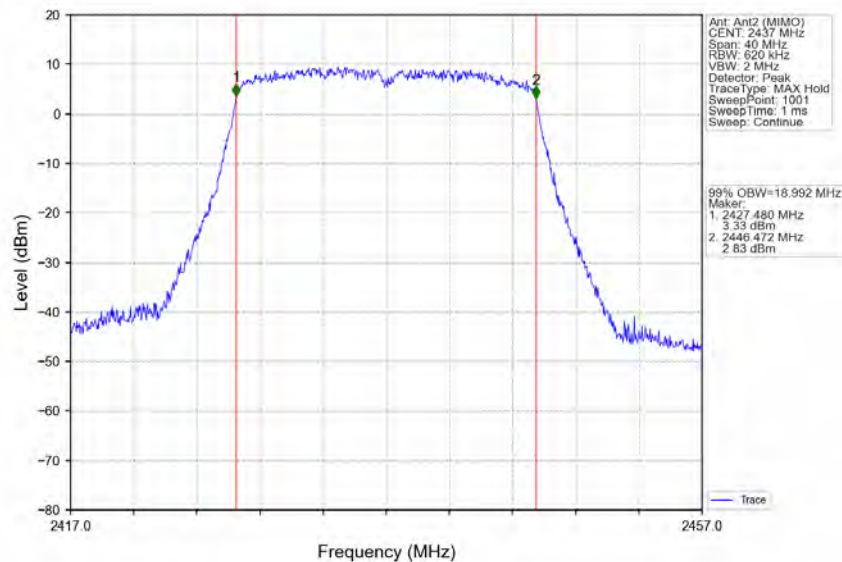

802.11ax(HEW20) HCH 2462MHz RU242 Left Ant1 (MIMO) NTN

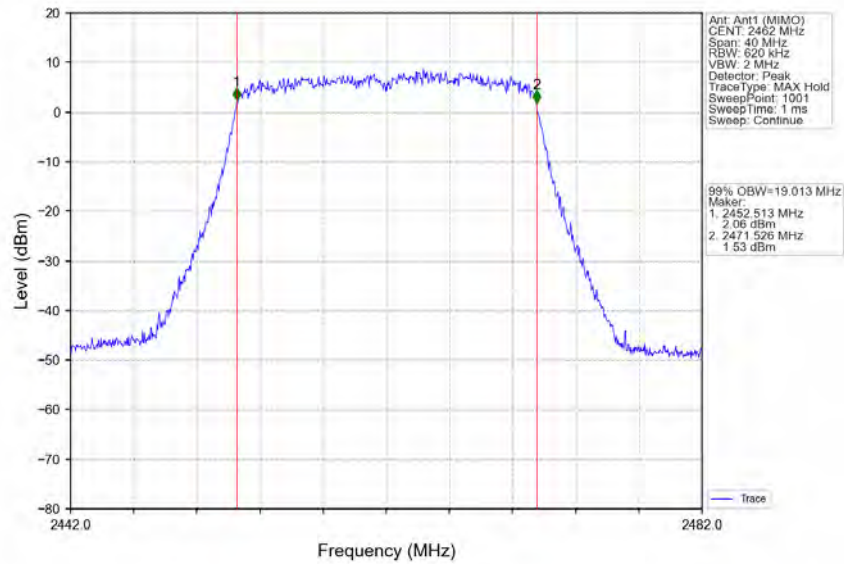

802.11ax(HEW20) HCH 2462MHz RU242 Left Ant2 (MIMO) NTN

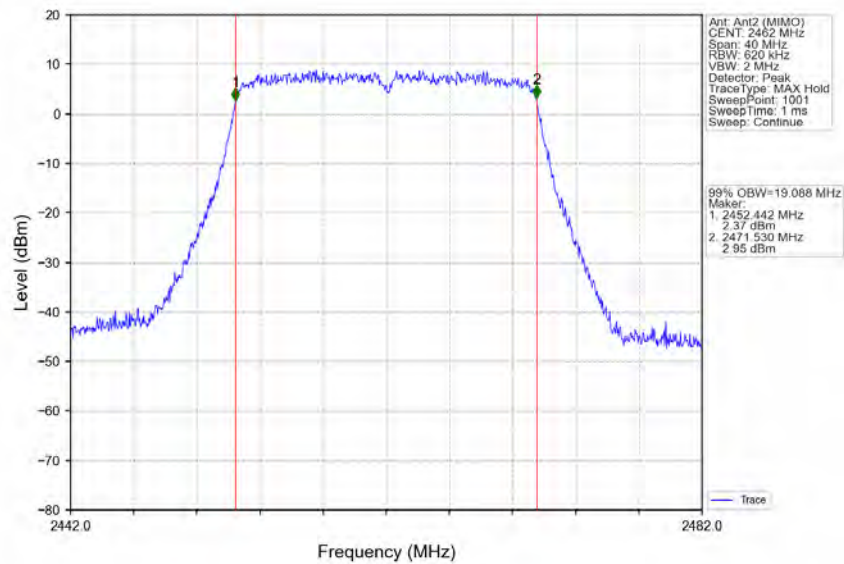


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 130 of 244

802.11ax(HEW40) LCH 2422MHz RU484 Left Ant1 (MIMO) NTNv

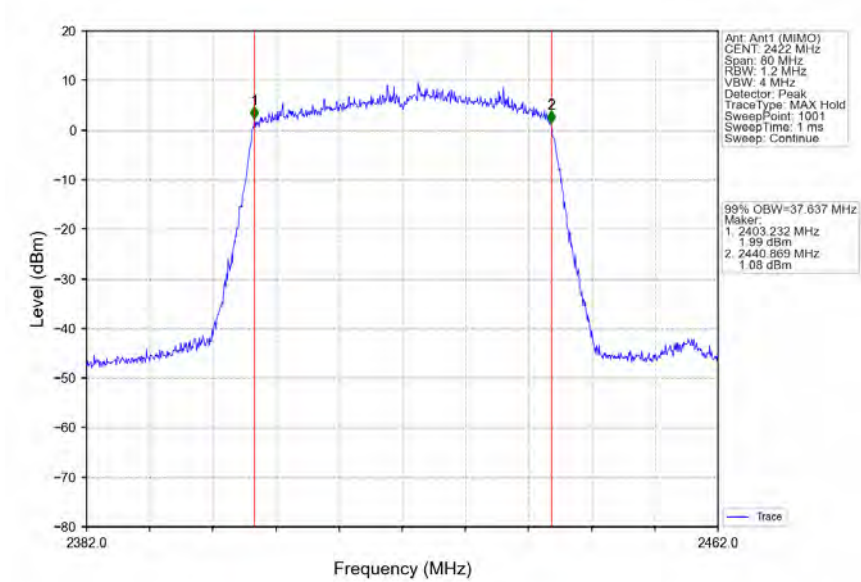

802.11ax(HEW40) LCH 2422MHz RU484 Left Ant2 (MIMO) NTNv

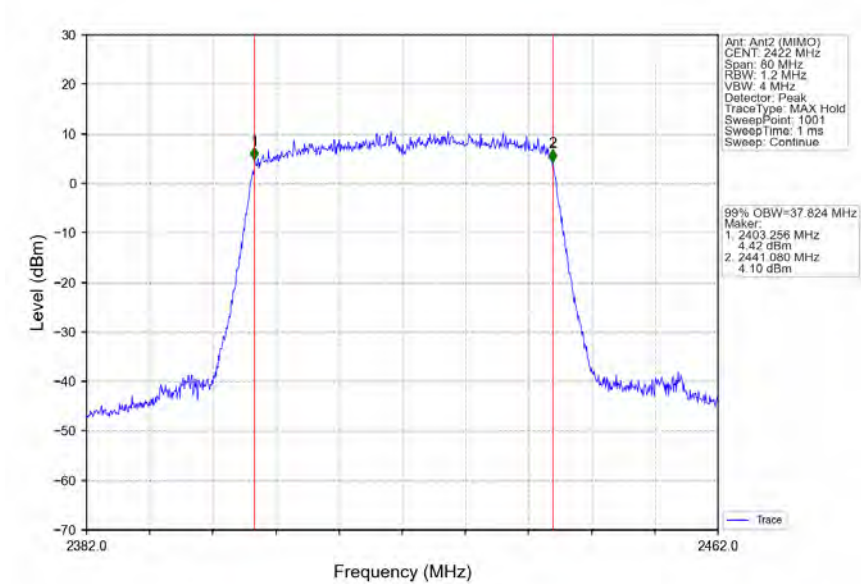


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 131 of 244

802.11ax(HEW40) MCH_2437MHz RU484 Left Ant1 (MIMO) NTN

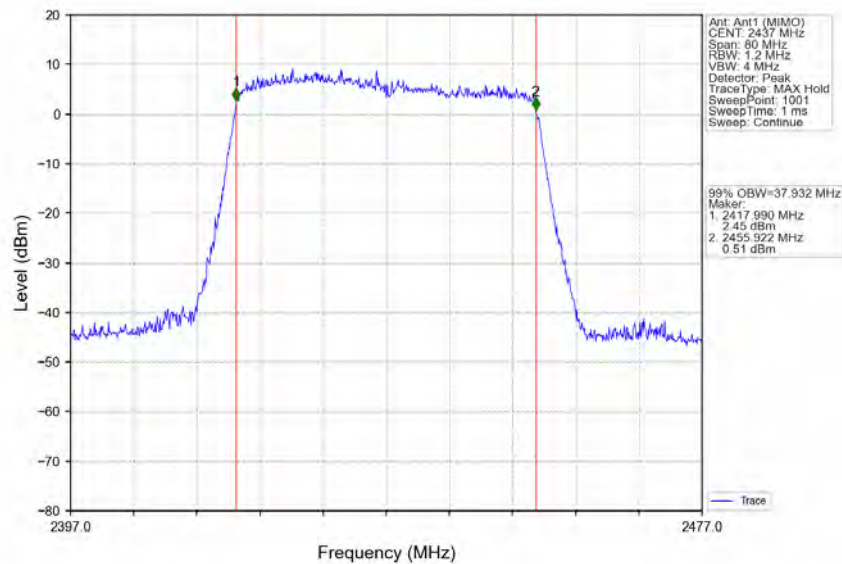

802.11ax(HEW40) MCH_2437MHz RU484 Left Ant2 (MIMO) NTN

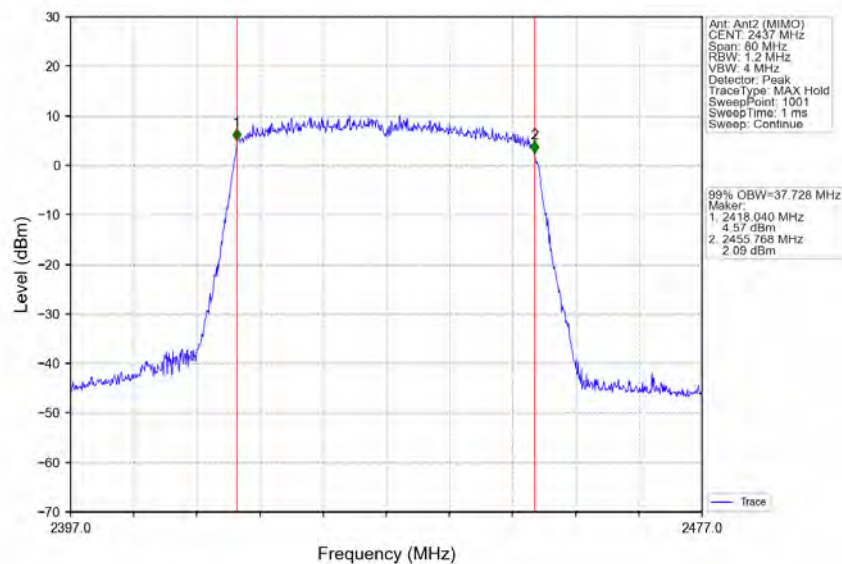


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 132 of 244


802.11ax(HEW40) HCH 2452MHz RU484 Left Ant1 (MIMO) NTN

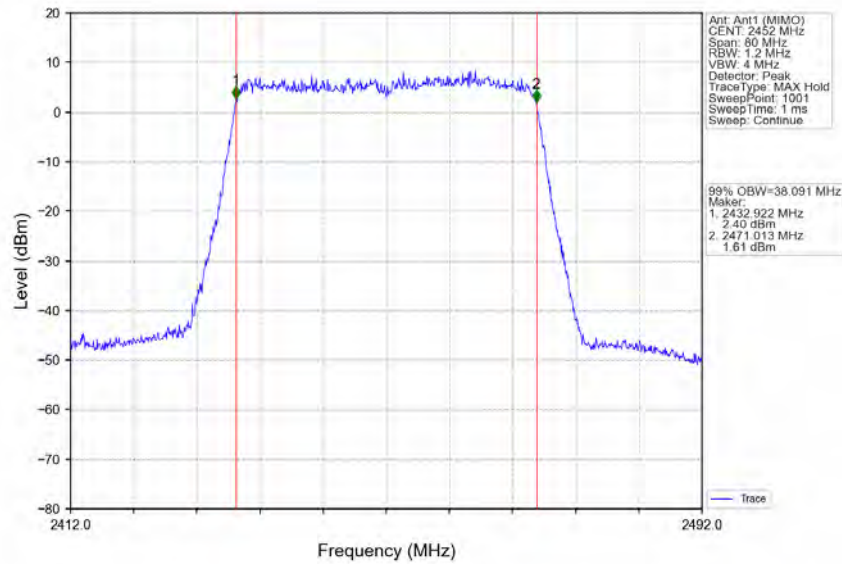

802.11ax(HEW40) HCH 2452MHz RU484 Left Ant2 (MIMO) NTN

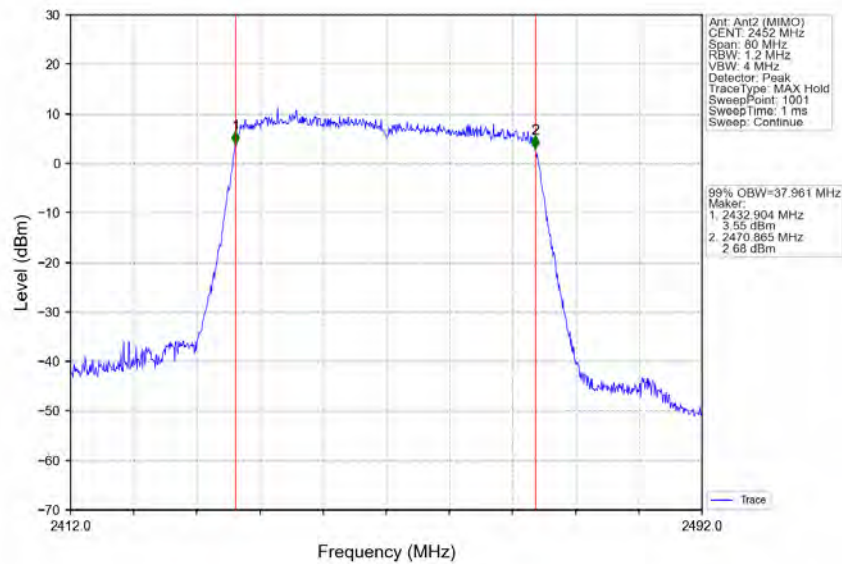

2.2.2 6dB BW

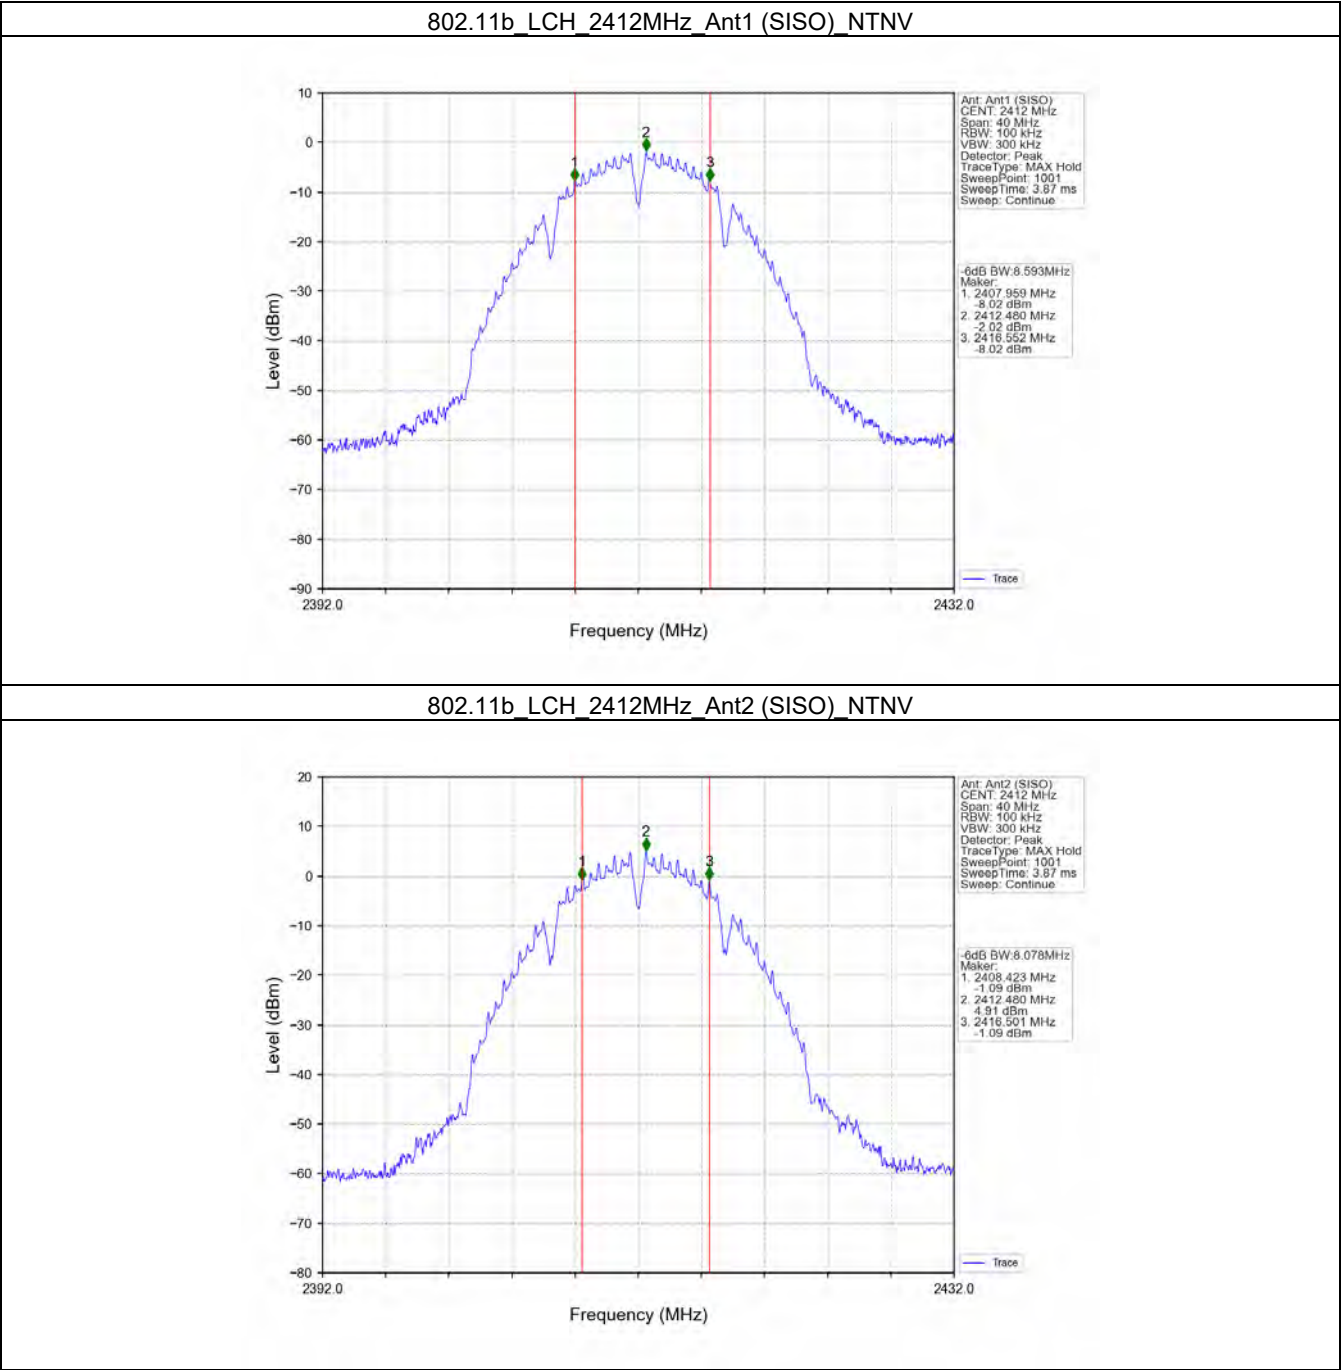


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 134 of 244

802.11b MCH 2437MHz Ant1 (SISO) NTN

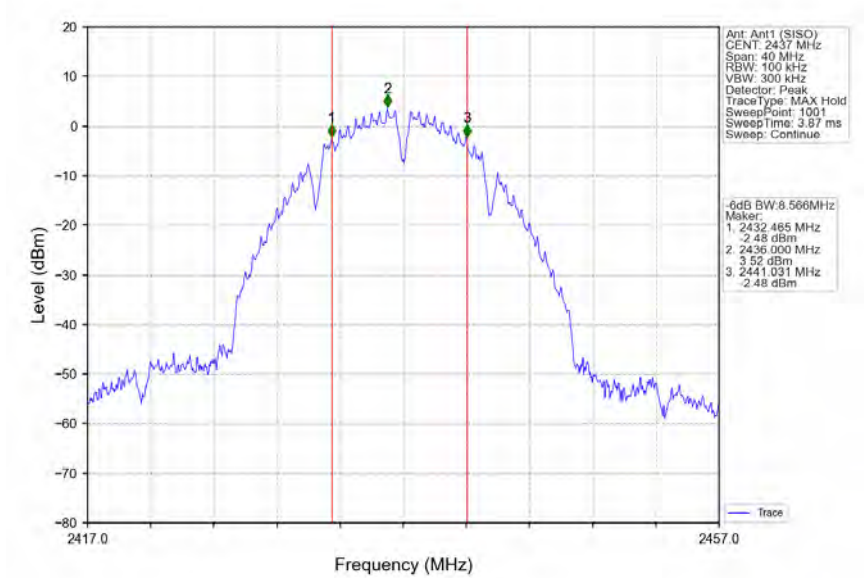

802.11b MCH 2437MHz Ant2 (SISO) NTN

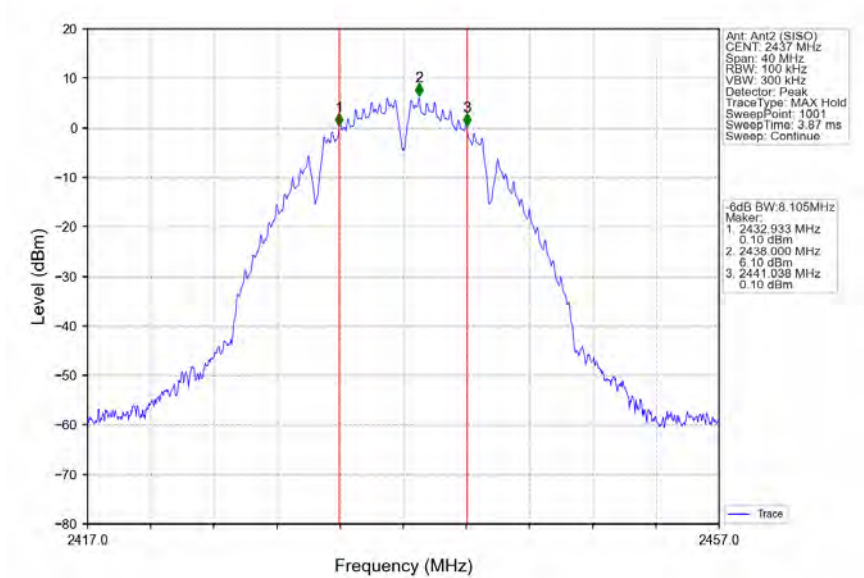


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 135 of 244

802.11b HCH 2462MHz Ant1 (SISO) NTN

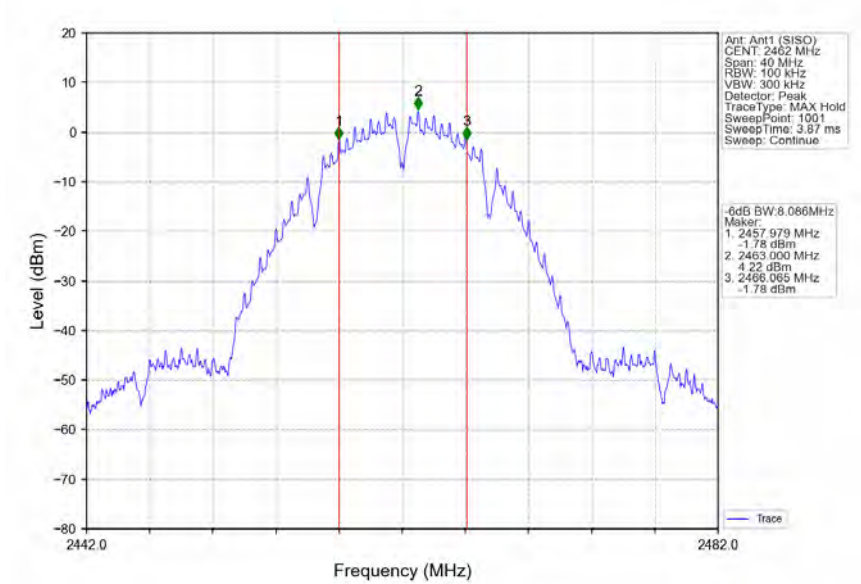

802.11b HCH 2462MHz Ant2 (SISO) NTN

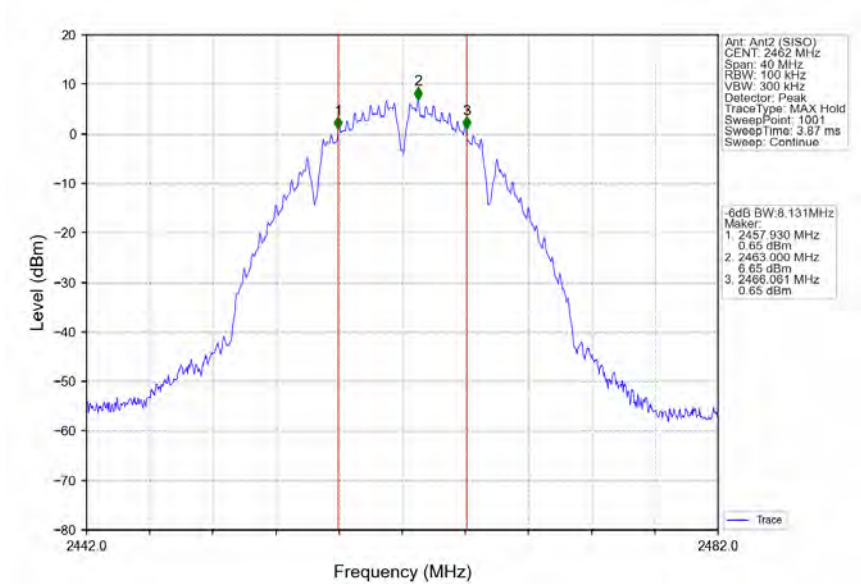


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 136 of 244

802.11g LCH 2412MHz Ant1 (SISO) NTN

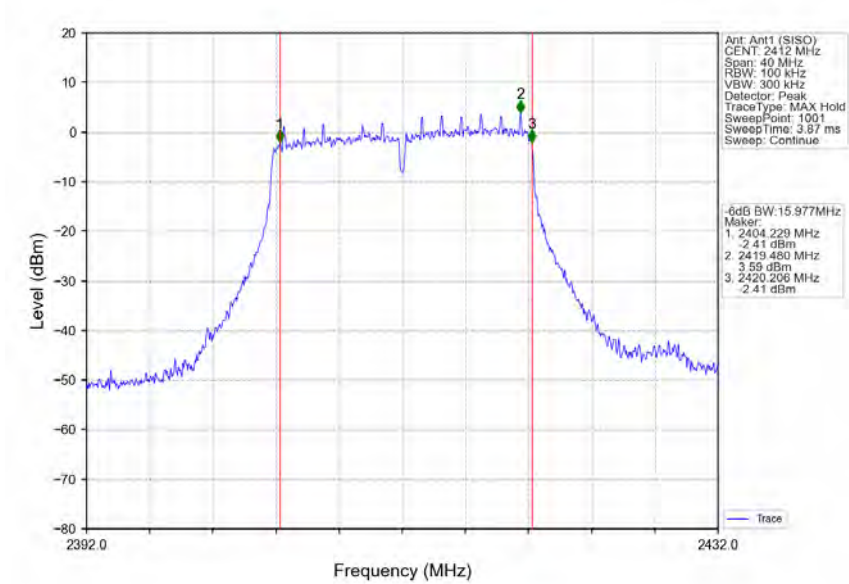

802.11g LCH 2412MHz Ant2 (SISO) NTN

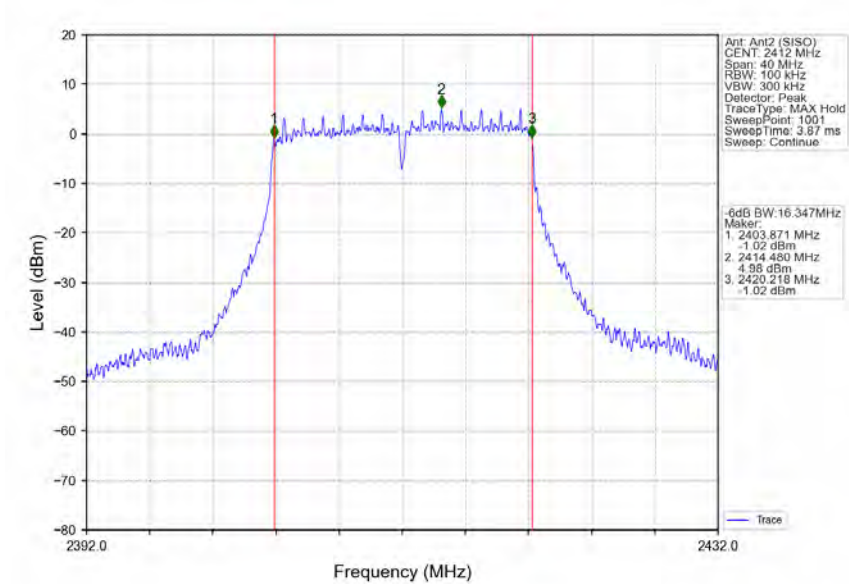


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 137 of 244

802.11g MCH 2437MHz Ant1 (SISO) NTN

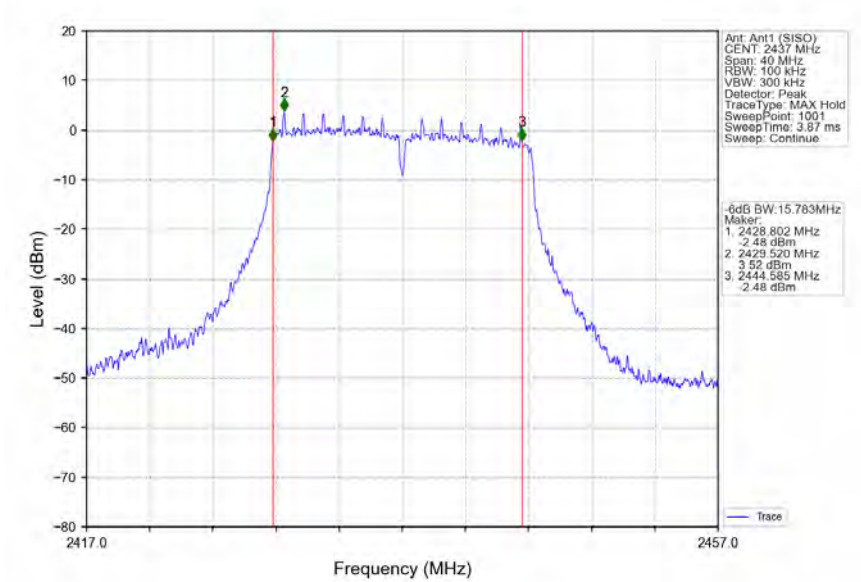

802.11g MCH 2437MHz Ant2 (SISO) NTN

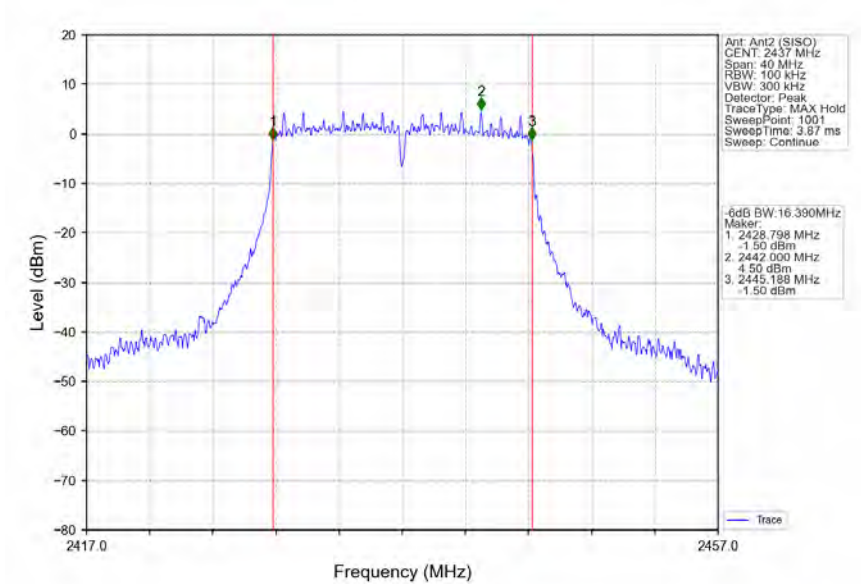


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 138 of 244

802.11g_HCH_2462MHz_Ant1 (SISO) NTN

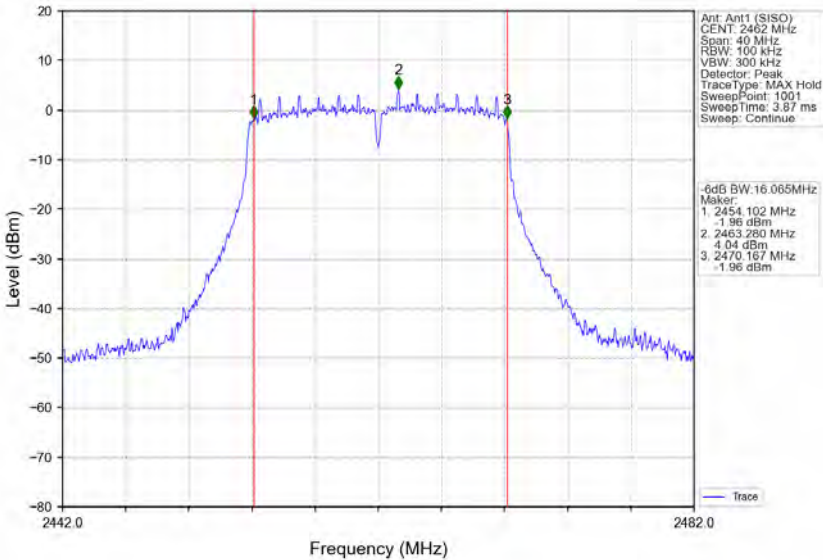

802.11g_HCH_2462MHz_Ant2 (SISO) NTN

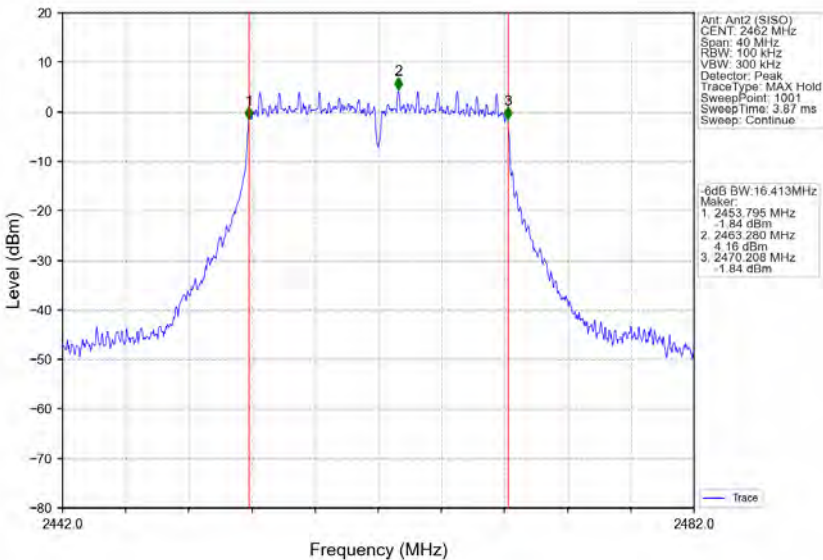


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 139 of 244

802.11n(HT20) LCH 2412MHz Ant1 (MIMO) NTN

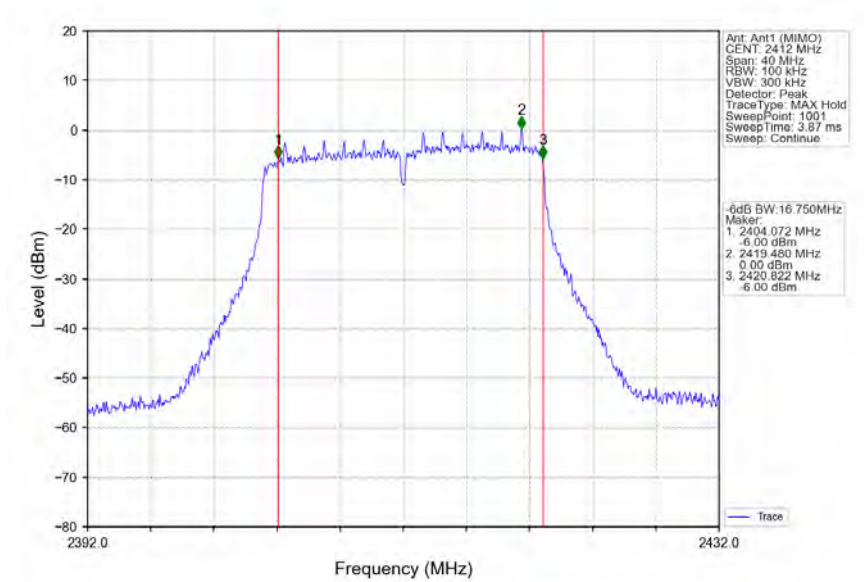

802.11n(HT20) LCH 2412MHz Ant2 (MIMO) NTN

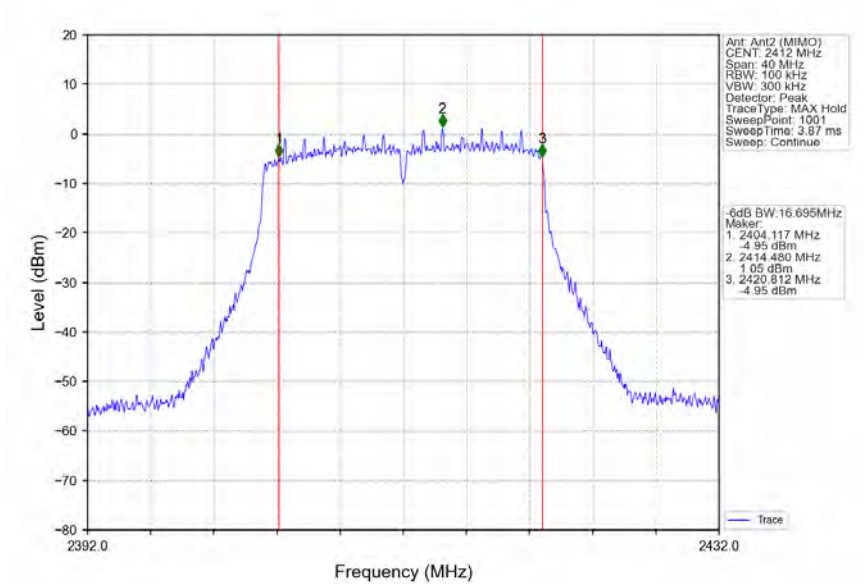


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 140 of 244

802.11n(HT20) MCH 2437MHz Ant1 (MIMO) NTN

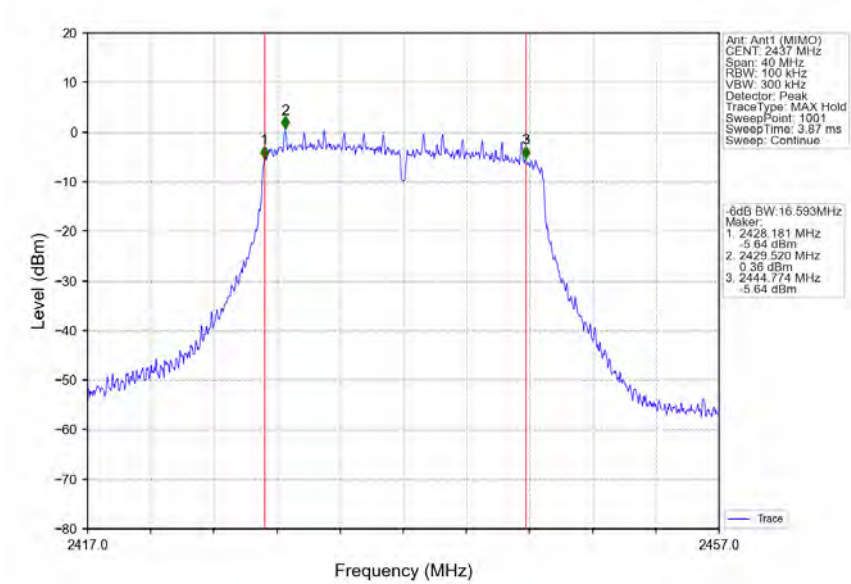

802.11n(HT20) MCH 2437MHz Ant2 (MIMO) NTN

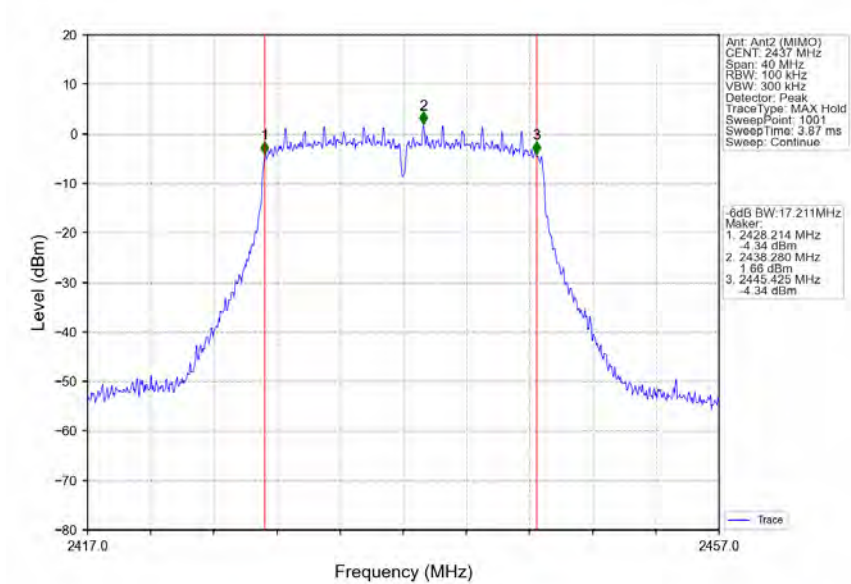


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 141 of 244

802.11n(HT20) HCH 2462MHz Ant1 (MIMO) NTN

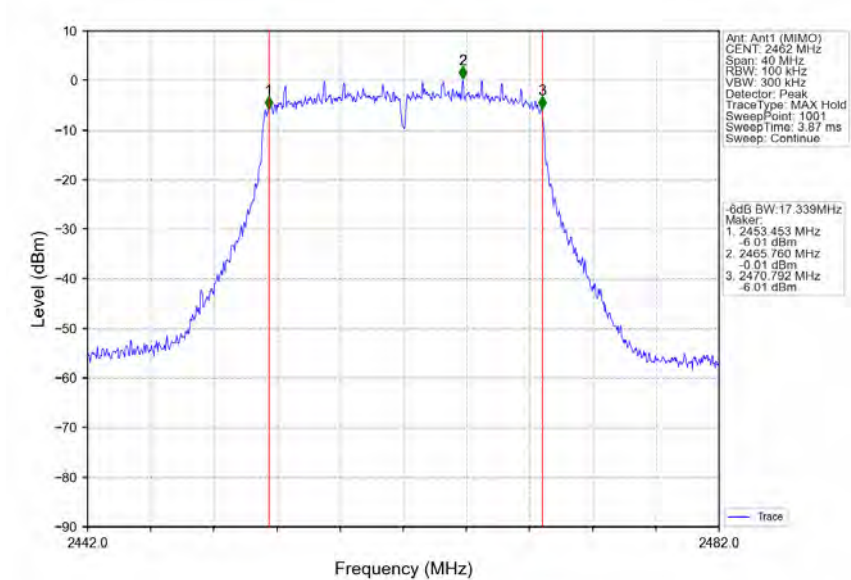

802.11n(HT20) HCH 2462MHz Ant2 (MIMO) NTN

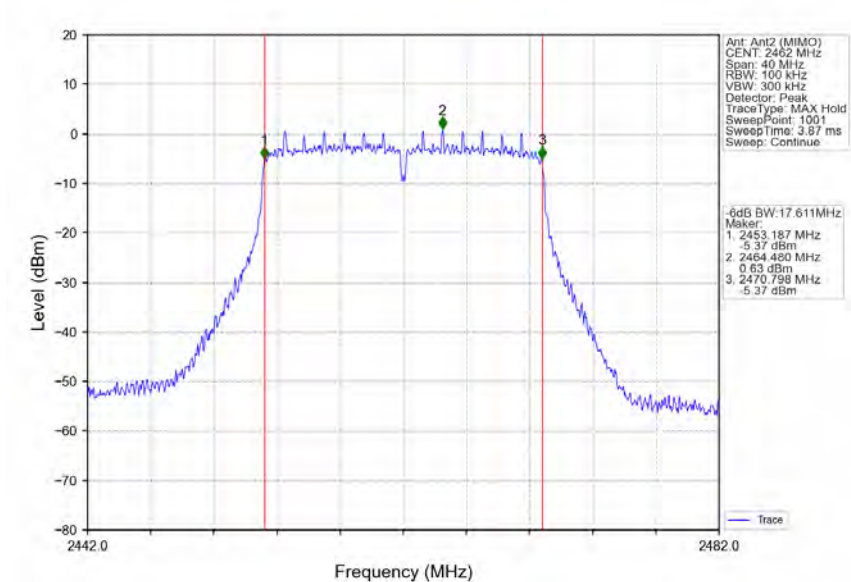


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 142 of 244


802.11n(HT40) LCH 2422MHz Ant1 (MIMO) NTVN

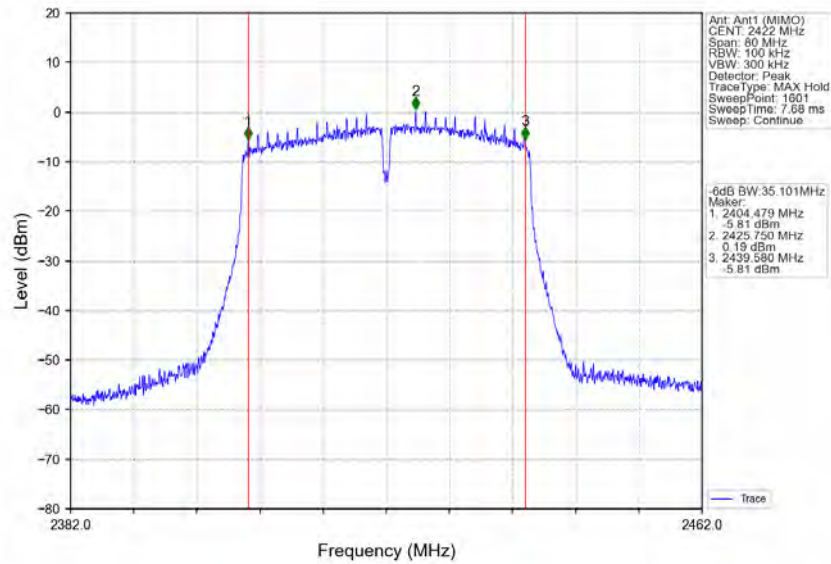


802.11n(HT40) LCH 2422MHz Ant2 (MIMO) NTVN

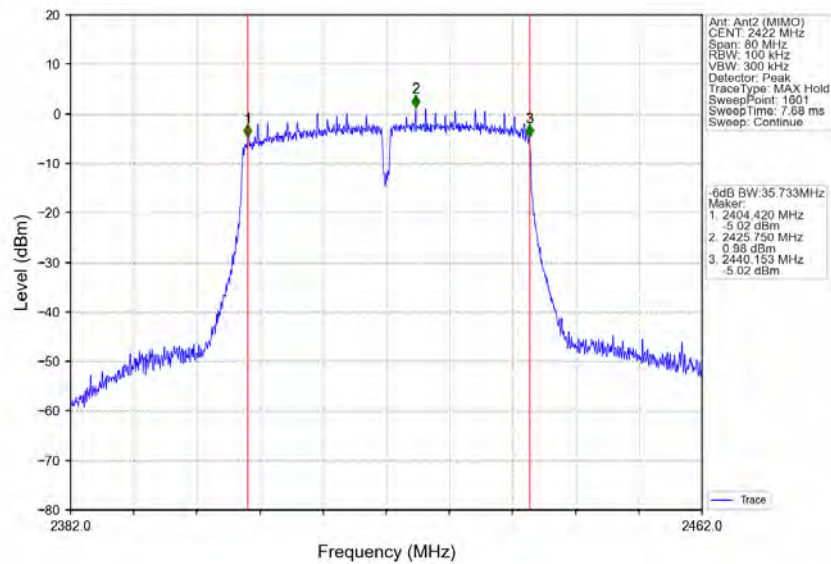

802.11n(HT40) MCH 2437MHz Ant1 (MIMO) NTN

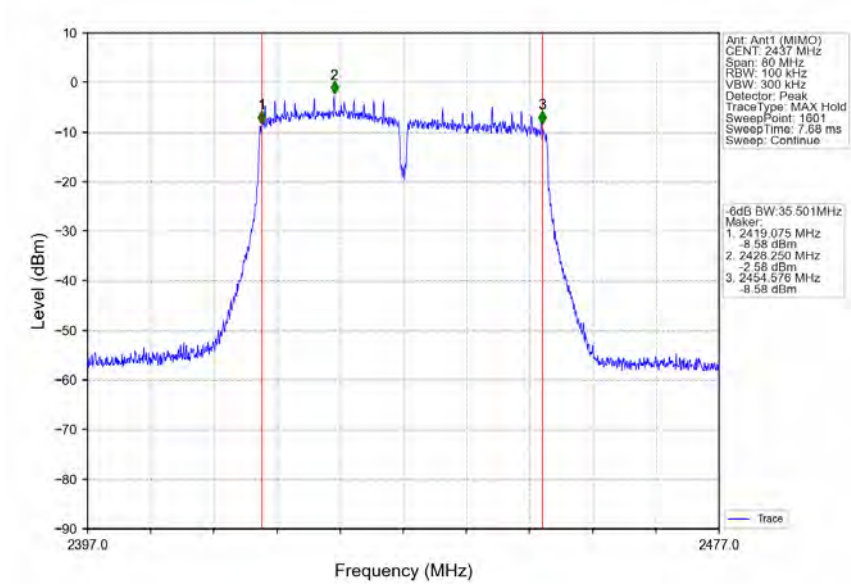

802.11n(HT40) MCH 2437MHz Ant2 (MIMO) NTN

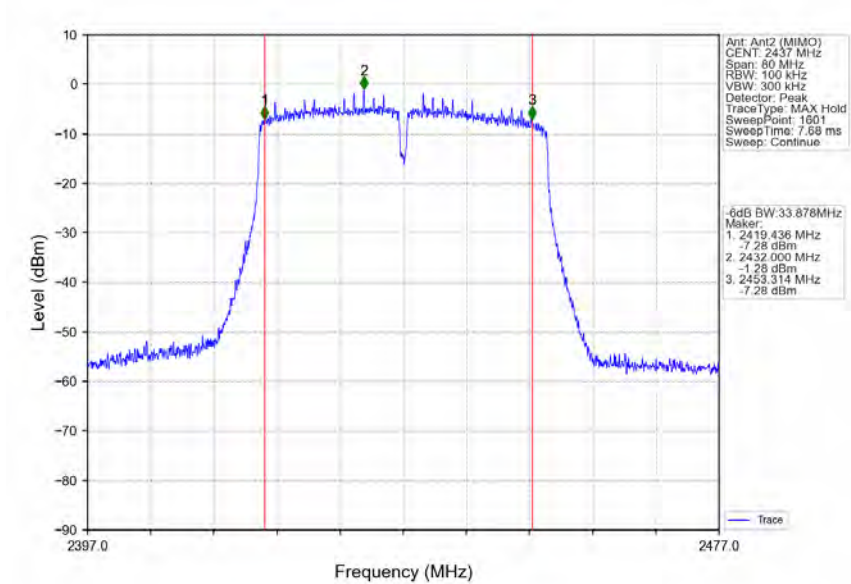


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 144 of 244

802.11n(HT40) HCH 2452MHz Ant1 (MIMO) NTN

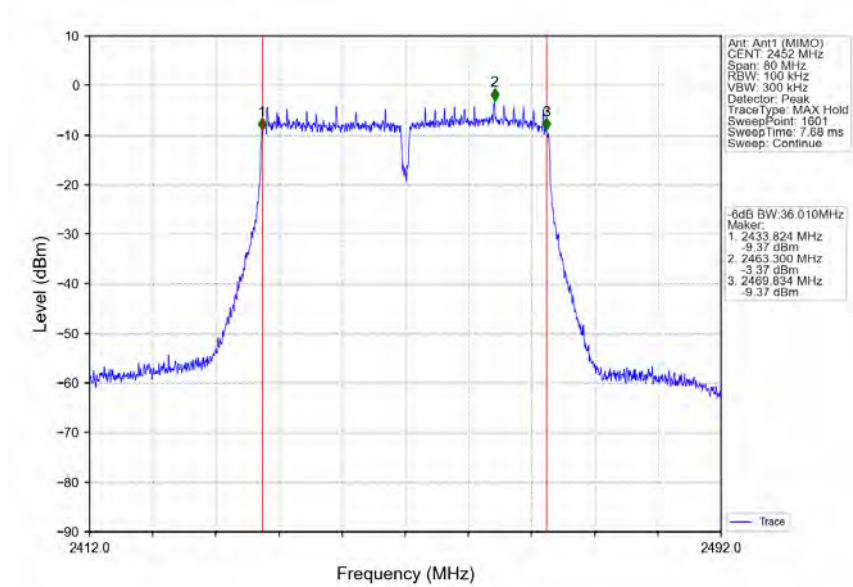

802.11n(HT40) HCH 2452MHz Ant2 (MIMO) NTN

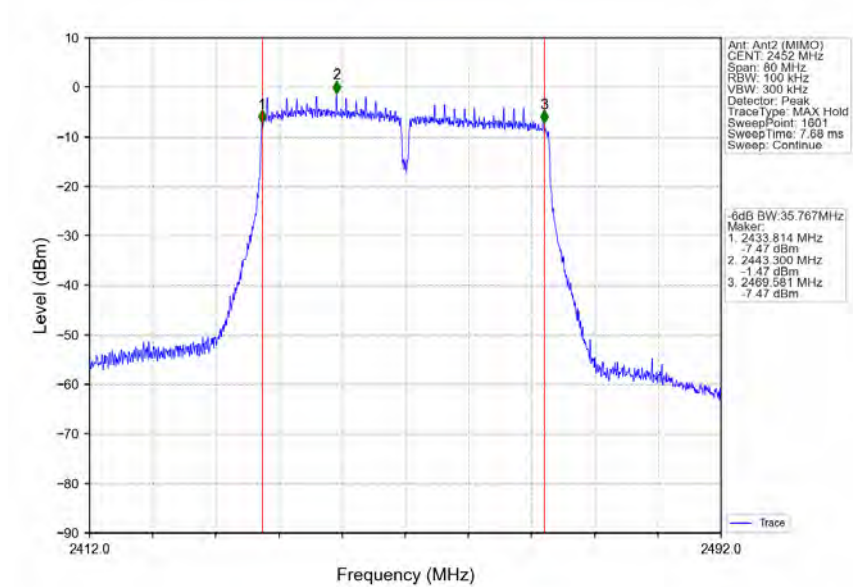


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 145 of 244

802.11ax(HEW20) LCH 2412MHz RU242 Left Ant1 (MIMO) NTNv

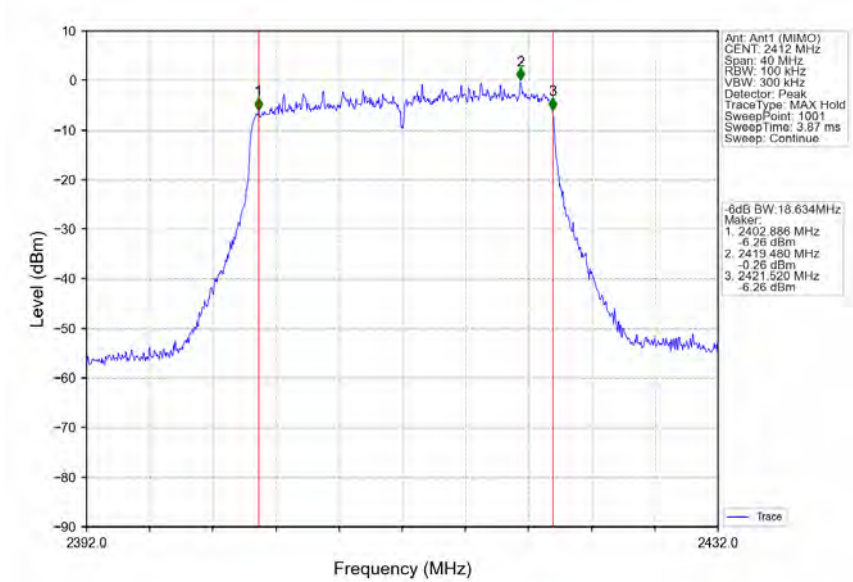

802.11ax(HEW20) LCH 2412MHz RU242 Left Ant2 (MIMO) NTNv

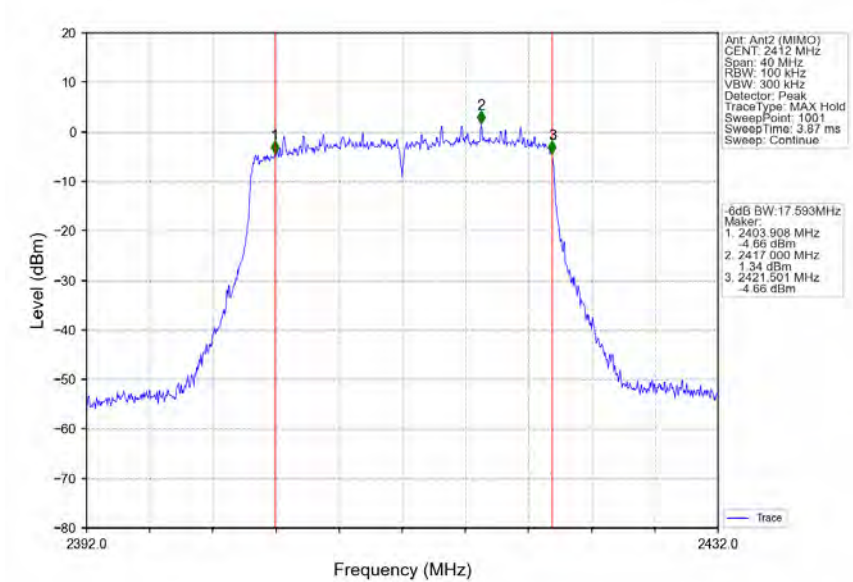


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 146 of 244

802.11ax(HEW20) MCH_2437MHz RU242 Left Ant1 (MIMO) NTN

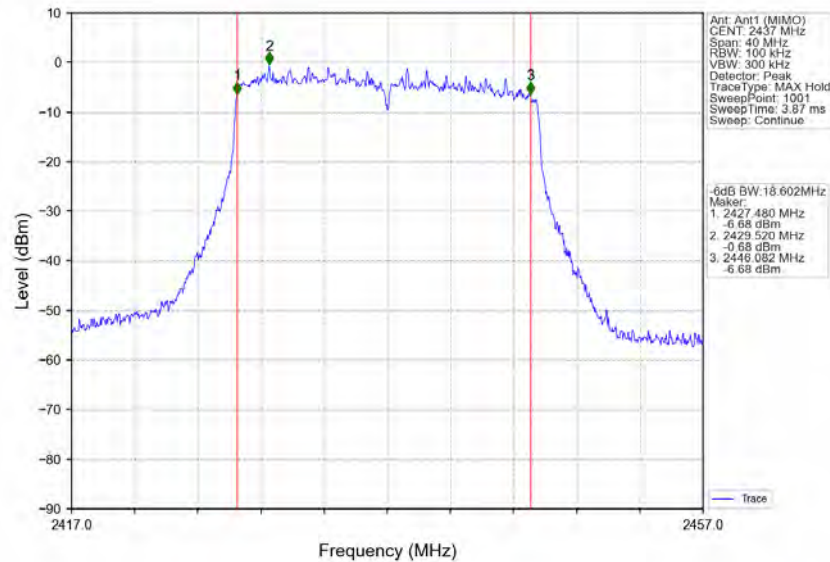

802.11ax(HEW20) MCH_2437MHz RU242 Left Ant2 (MIMO) NTN

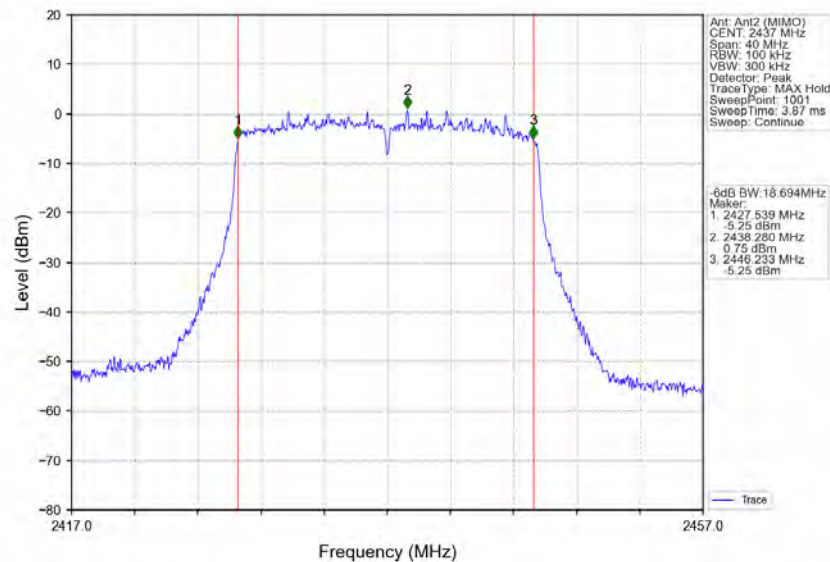


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 147 of 244

802.11ax(HEW20) HCH 2462MHz RU242 Left Ant1 (MIMO) NTN

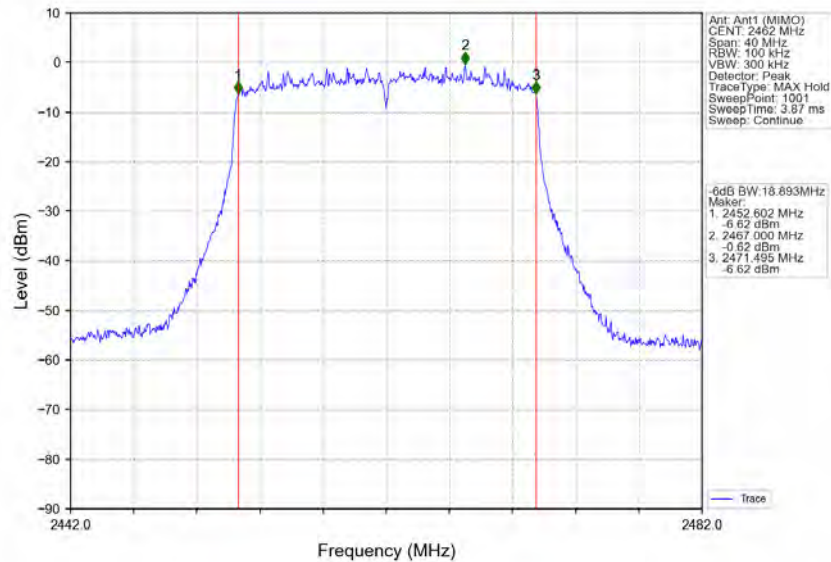

802.11ax(HEW20) HCH 2462MHz RU242 Left Ant2 (MIMO) NTN

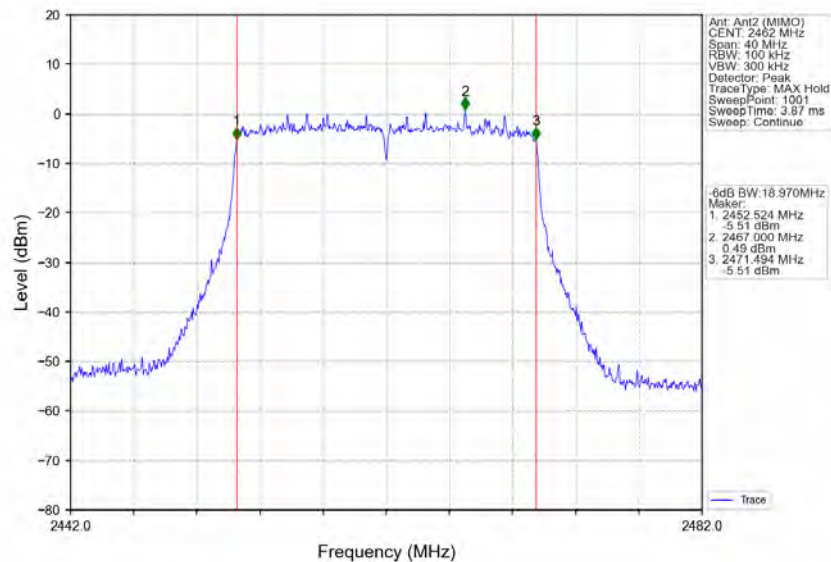


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 148 of 244

802.11ax(HEW40) LCH 2422MHz RU484 Left Ant1 (MIMO) NTNv

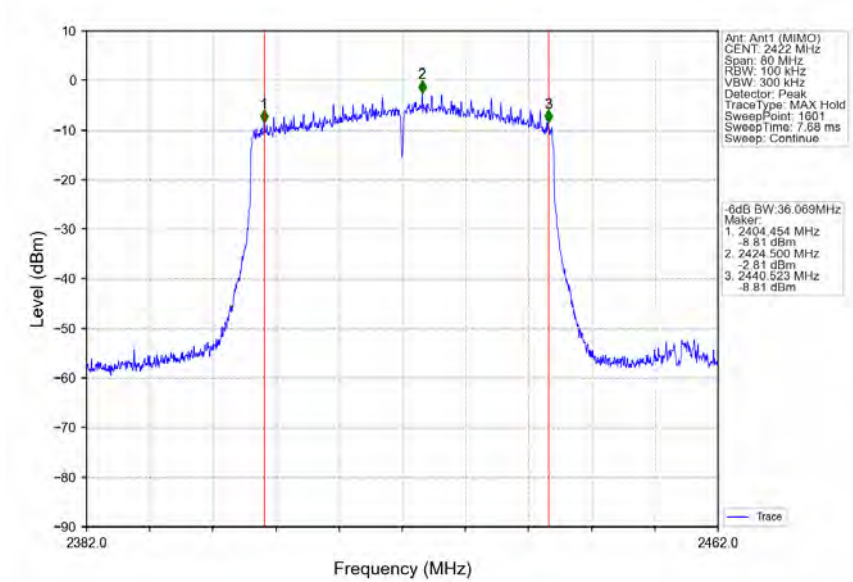

802.11ax(HEW40) LCH 2422MHz RU484 Left Ant2 (MIMO) NTNv

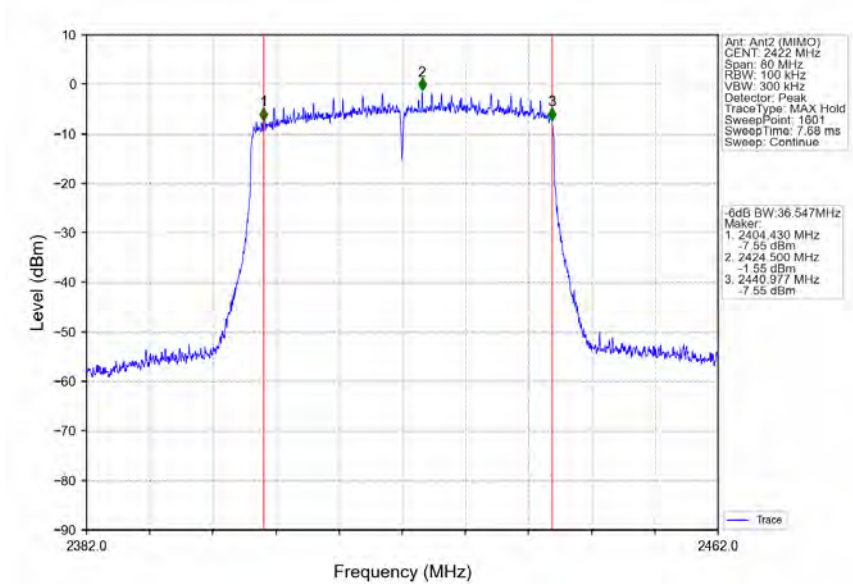


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 149 of 244

802.11ax(HEW40) MCH_2437MHz RU484 Left Ant1 (MIMO) NTN

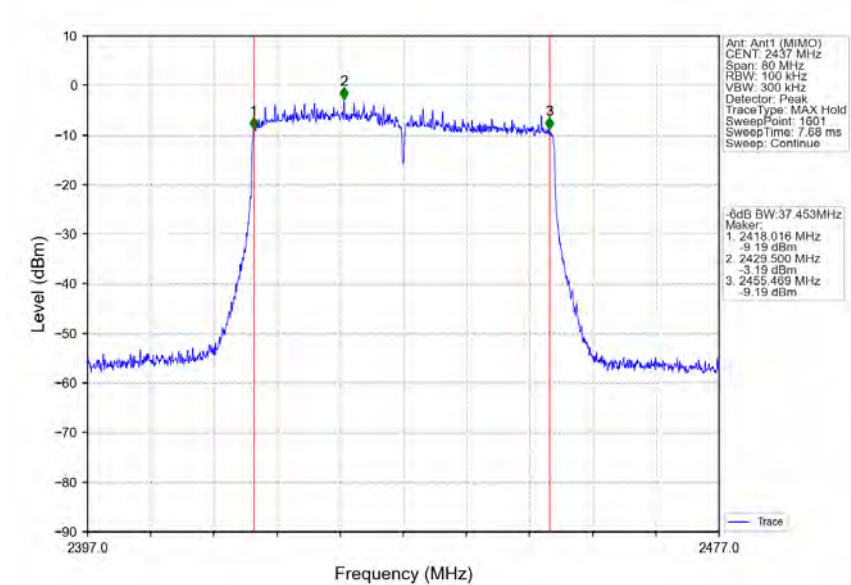

802.11ax(HEW40) MCH_2437MHz RU484 Left Ant2 (MIMO) NTN

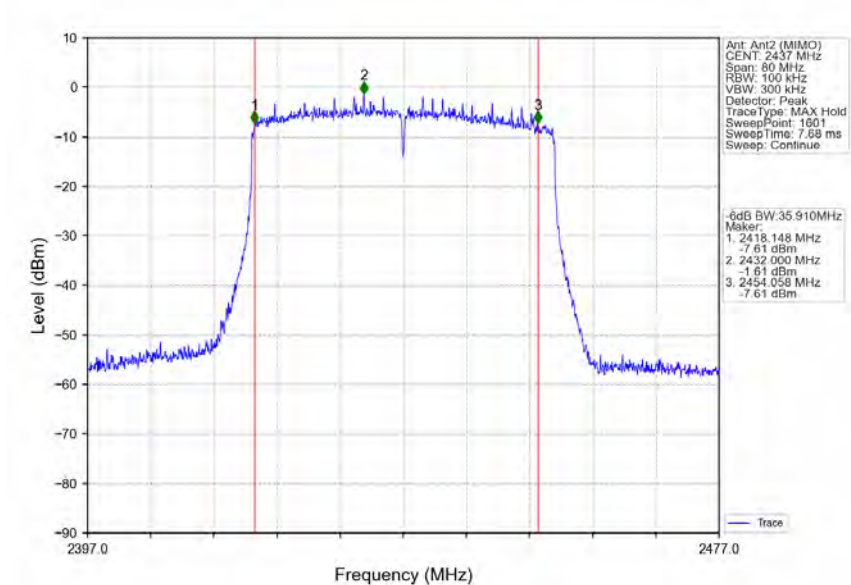


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 150 of 244

802.11ax(HEW40) HCH 2452MHz RU484 Left Ant1 (MIMO) NTN

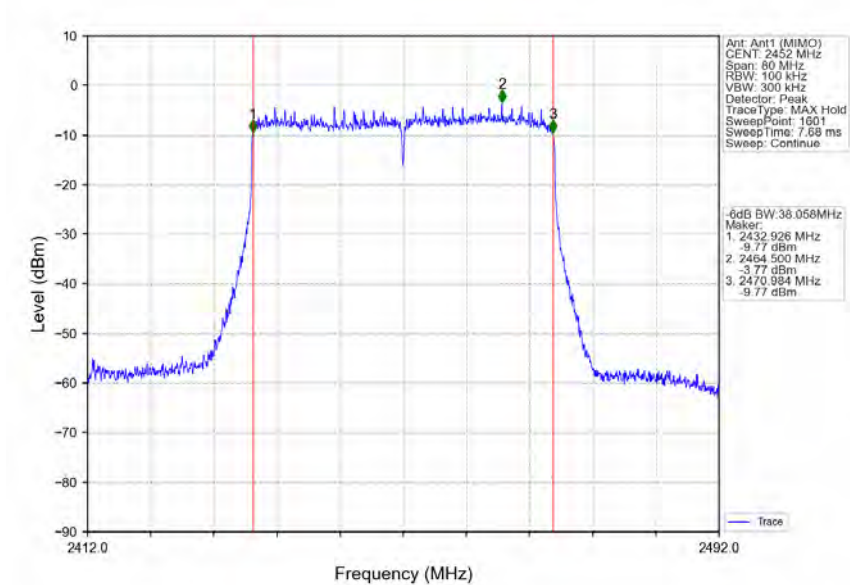

802.11ax(HEW40) HCH 2452MHz RU484 Left Ant2 (MIMO) NTN

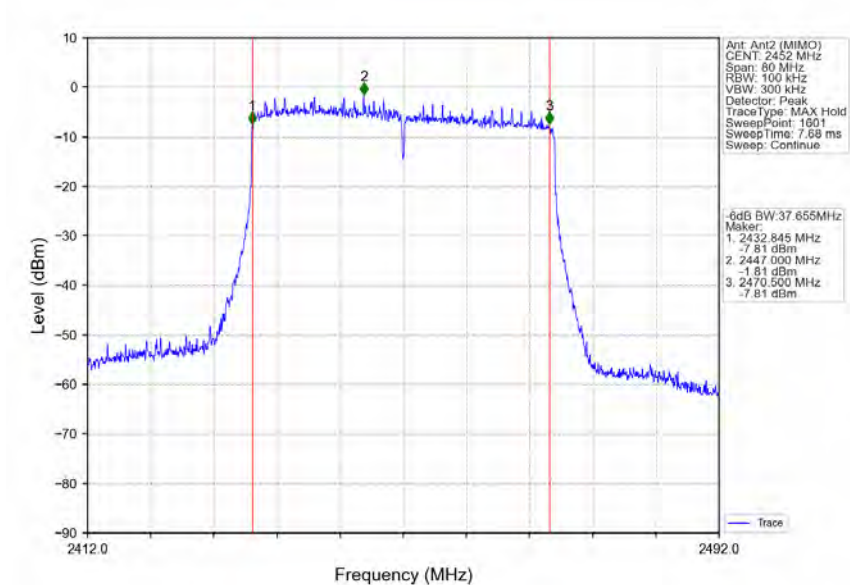


Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)				Verdict
					ANT1	ANT2	MIMO	Limit	
802.11b	SISO	2412	/	/	14.11	14.94	/	<=30	Pass
		2437	/	/	14.71	14.36	/	<=30	Pass
		2462	/	/	14.15	14.15	/	<=30	Pass
802.11g	SISO	2412	/	/	14.10	15.05	/	<=30	Pass
		2437	/	/	14.13	14.53	/	<=30	Pass
		2462	/	/	14.00	14.08	/	<=30	Pass
802.11n (HT20)	MIMO	2412	/	/	10.43	11.65	14.09	<=30	Pass
		2437	/	/	10.85	12.73	14.90	<=30	Pass
		2462	/	/	11.44	11.85	14.66	<=30	Pass
802.11n (HT40)	MIMO	2422	/	/	10.34	12.17	14.36	<=30	Pass
		2437	/	/	10.34	11.91	14.21	<=30	Pass
		2452	/	/	10.38	11.81	14.16	<=30	Pass
802.11ax (HEW20)	MIMO	2412	RU242	Left	10.47	11.97	14.29	<=30	Pass
		2437	RU242	Left	10.02	11.94	14.10	<=30	Pass
		2462	RU242	Left	10.71	11.54	14.16	<=30	Pass
802.11ax (HEW40)	MIMO	2422	RU484	Left	10.02	12.00	14.13	<=30	Pass
		2437	RU484	Left	10.30	11.82	14.14	<=30	Pass
		2452	RU484	Left	10.26	11.81	14.11	<=30	Pass


Note1: Antenna Gain: Ant1: 2.10dBi; Ant2: 2.10dBi;
Note2: Directional Gain: Uncorrelated(Directional Gain = Ant Gain)

3.2 Test Graph


3.2.1 Power

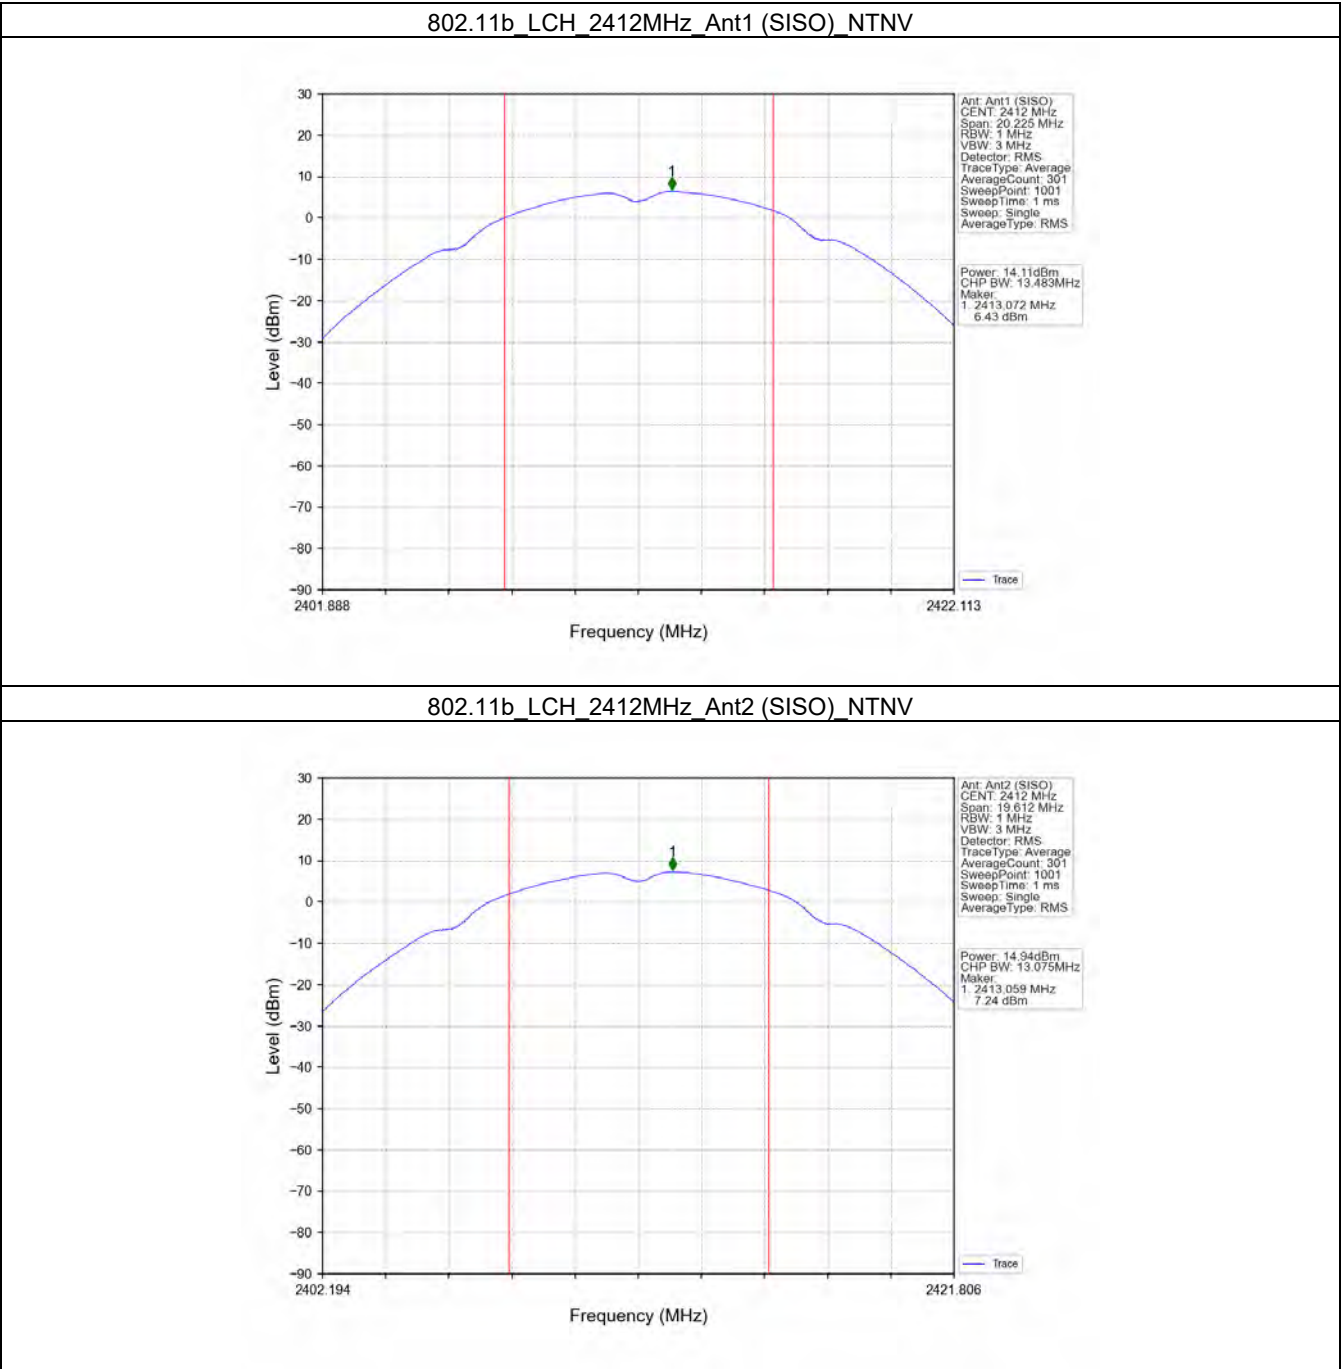

802.11b MCH 2437MHz Ant1 (SISO) NTN

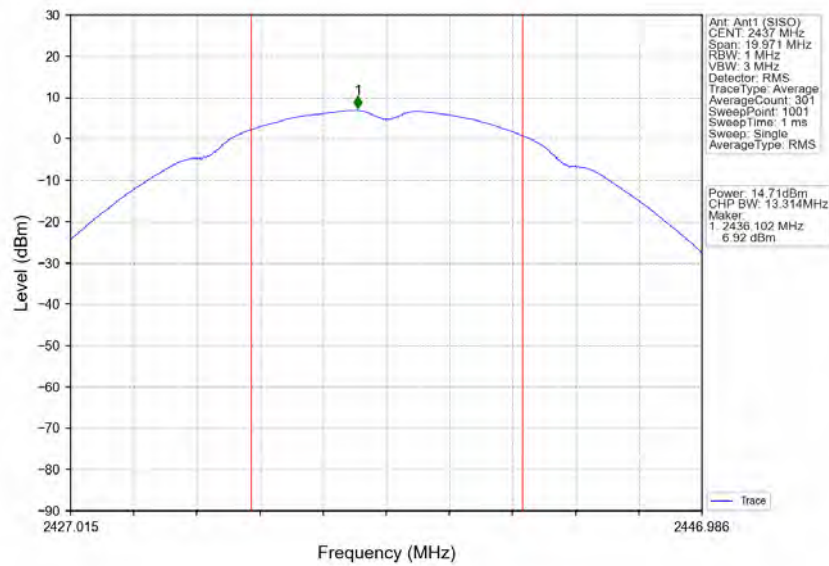

802.11b MCH 2437MHz Ant2 (SISO) NTN

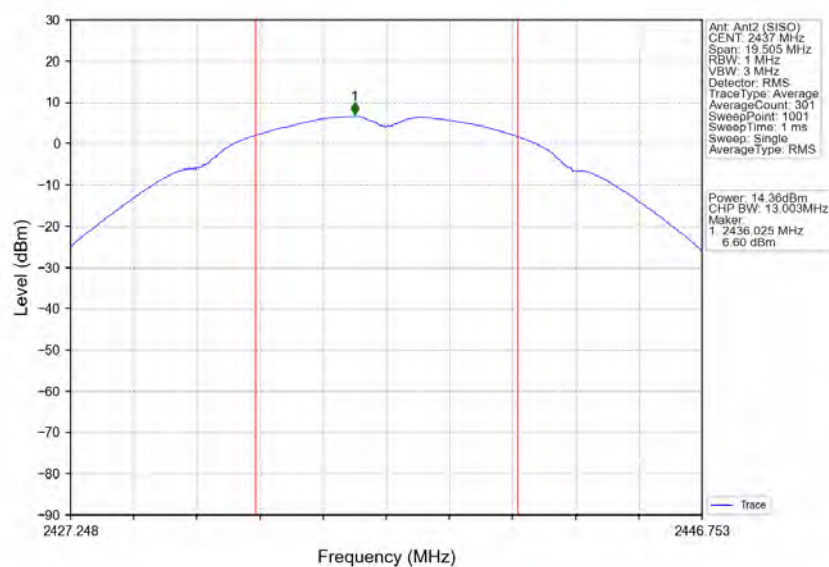


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 154 of 244

802.11b HCH 2462MHz Ant1 (SISO) NTN

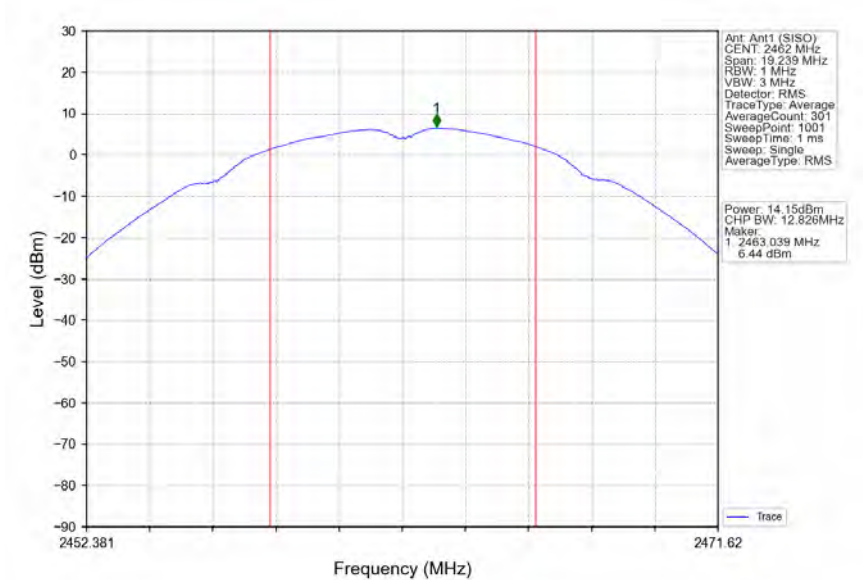

802.11b HCH 2462MHz Ant2 (SISO) NTN

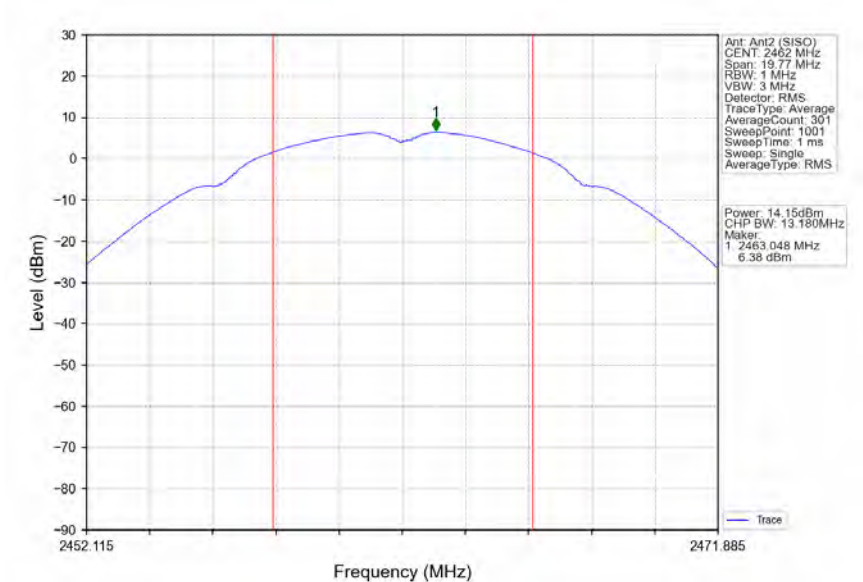


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 155 of 244


802.11g LCH 2412MHz Ant1 (SISO) NTN

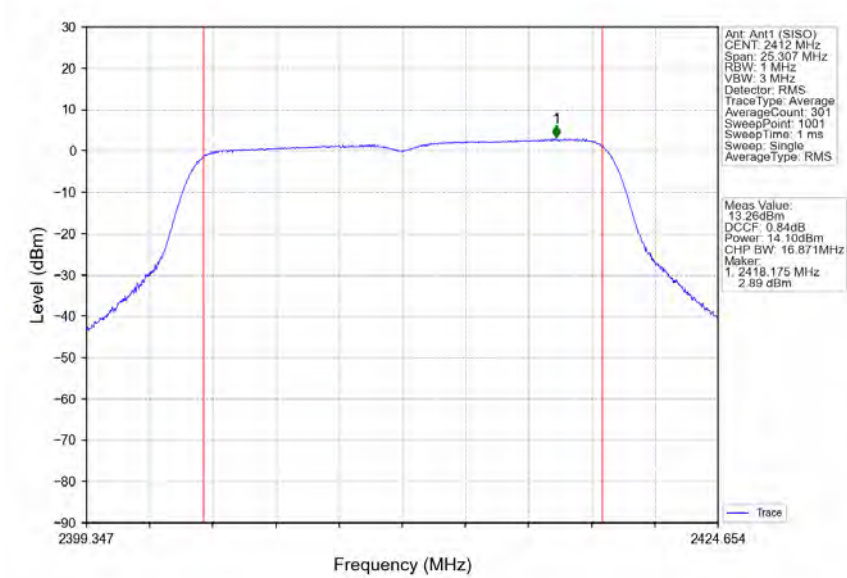


802.11g LCH 2412MHz Ant2 (SISO) NTN

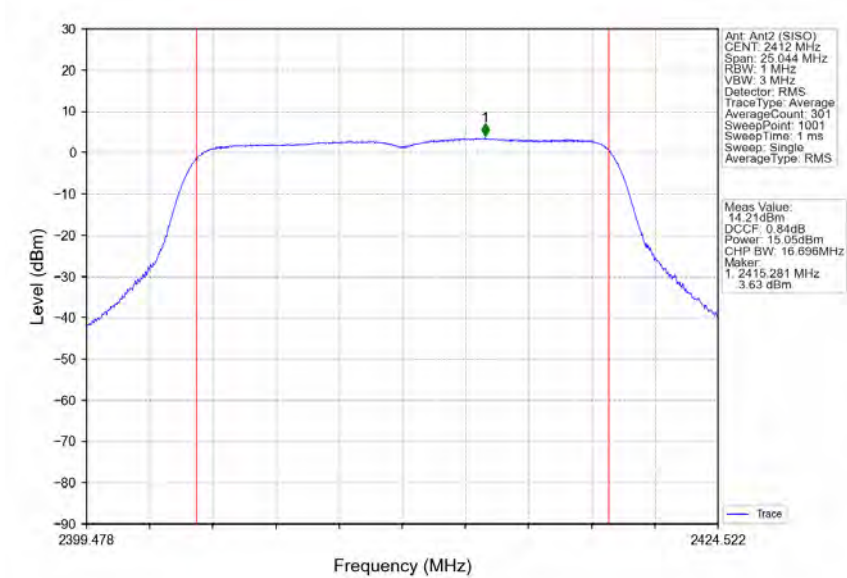

802.11g_MCH_2437MHz_Ant1 (SISO) NTN

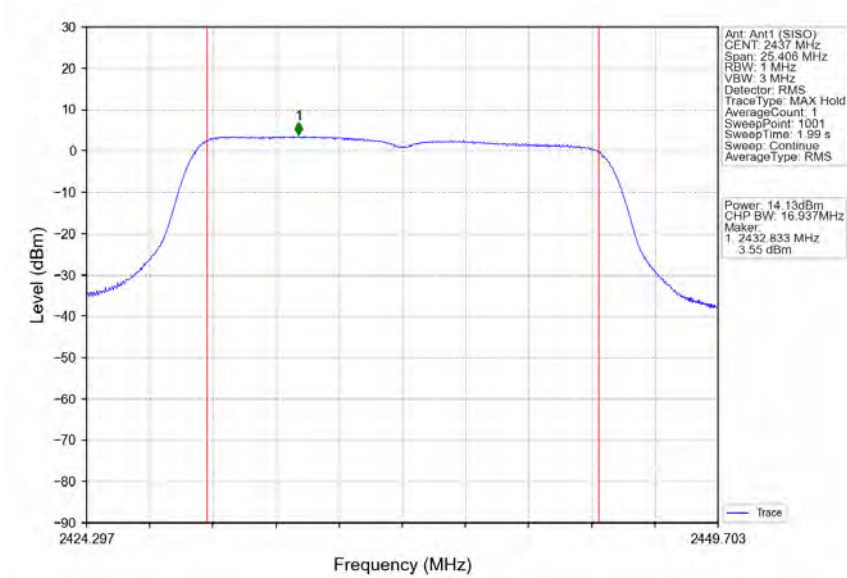

802.11g_MCH_2437MHz_Ant2 (SISO) NTN

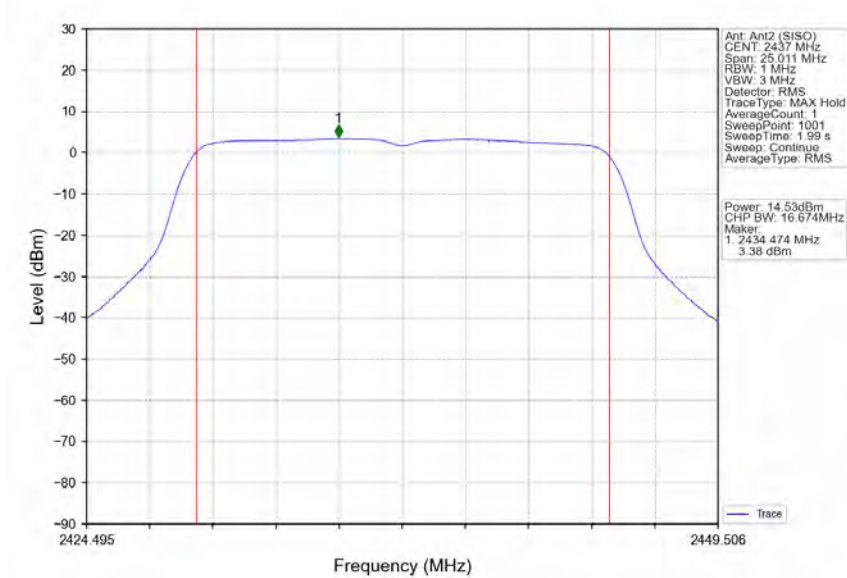


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 157 of 244


802.11g_HCH_2462MHz_Ant1 (SISO) NTN

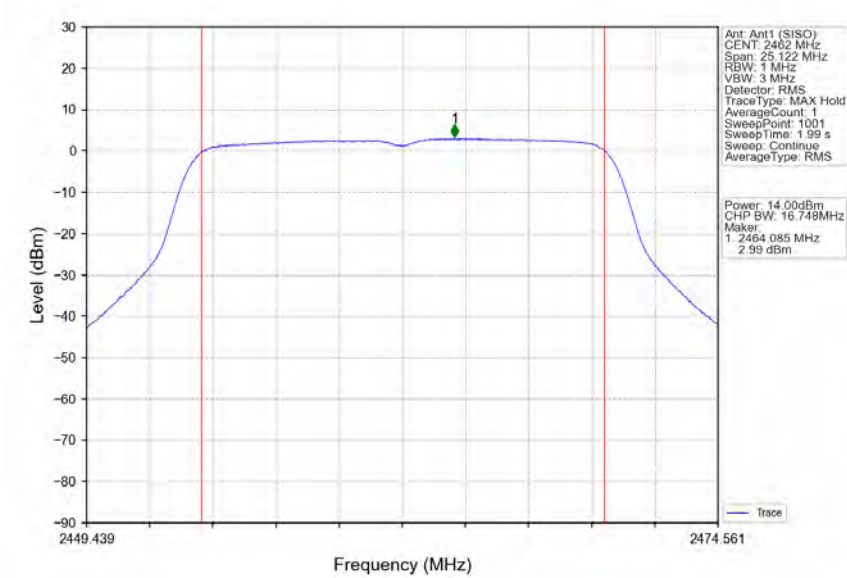


802.11g_HCH_2462MHz_Ant2 (SISO) NTN

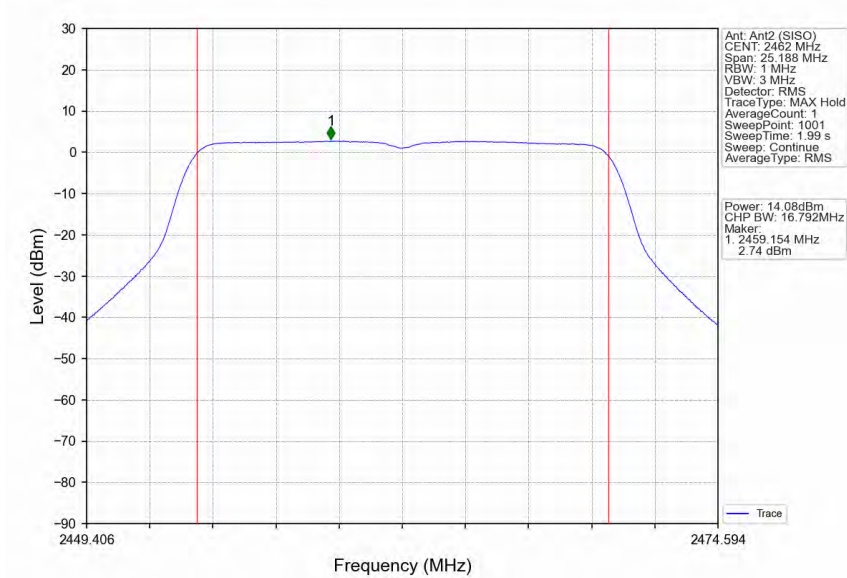

802.11n(HT20) LCH 2412MHz Ant1 (MIMO) NTVN

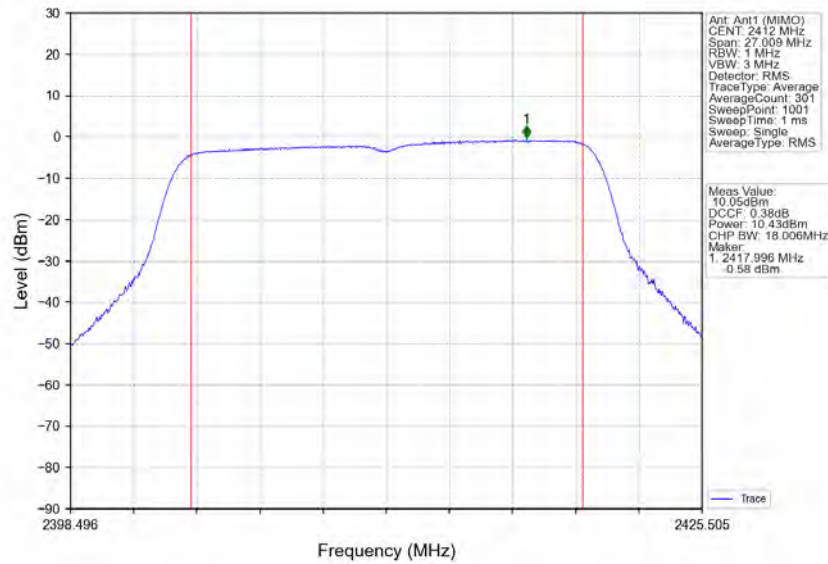

802.11n(HT20) LCH 2412MHz Ant2 (MIMO) NTVN

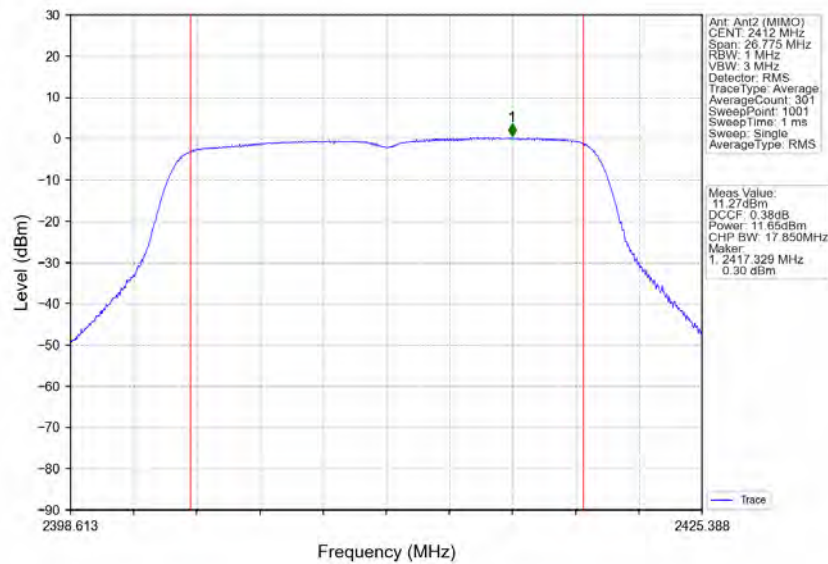


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 159 of 244


802.11n(HT20) MCH 2437MHz Ant1 (MIMO) NTNV

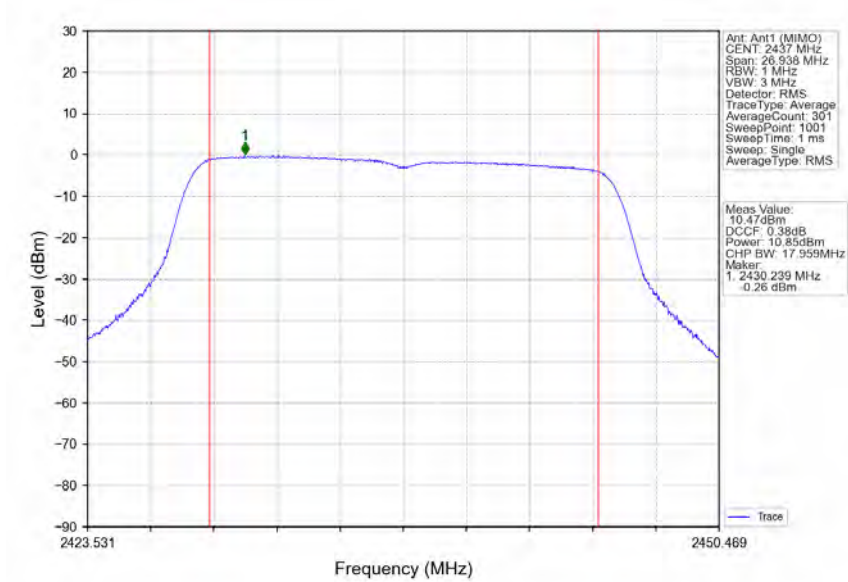


802.11n(HT20) MCH 2437MHz Ant2 (MIMO) NTNV

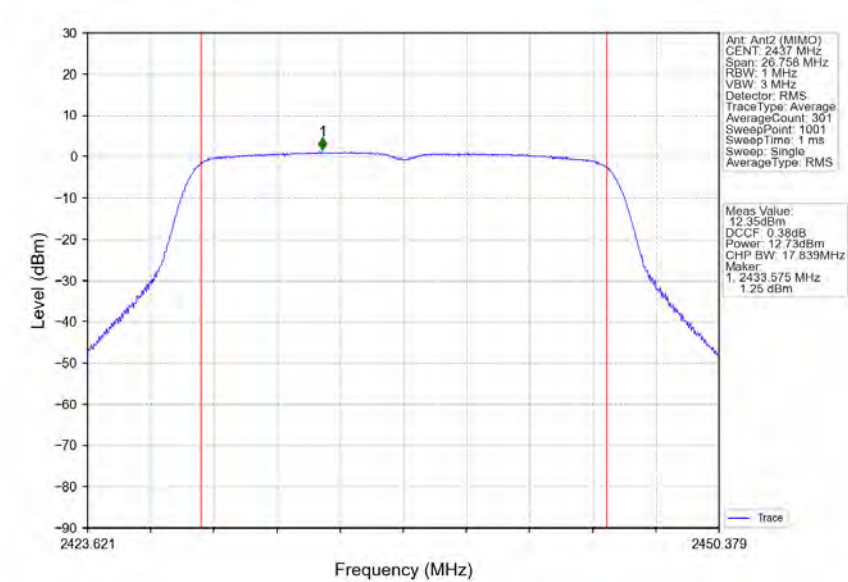


802.11n(HT20) HCH 2462MHz Ant1 (MIMO) NTN

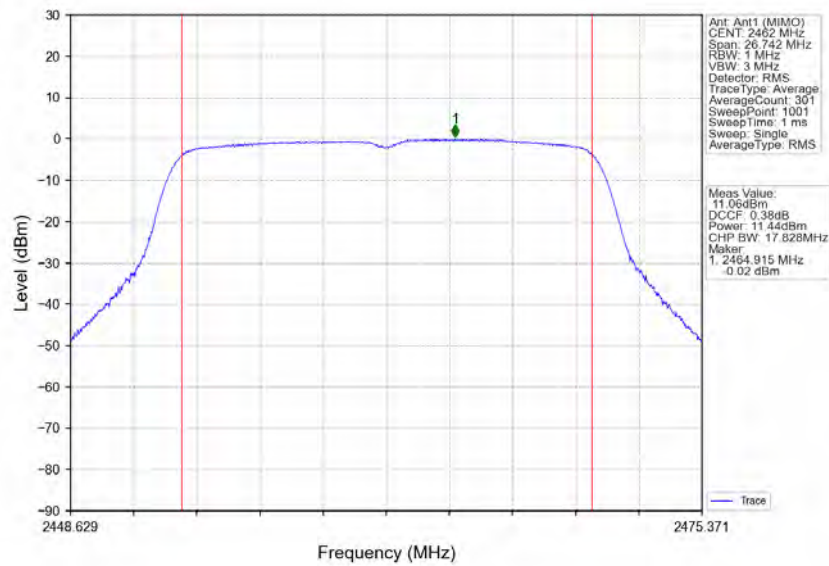


802.11n(HT20) HCH 2462MHz Ant2 (MIMO) NTN

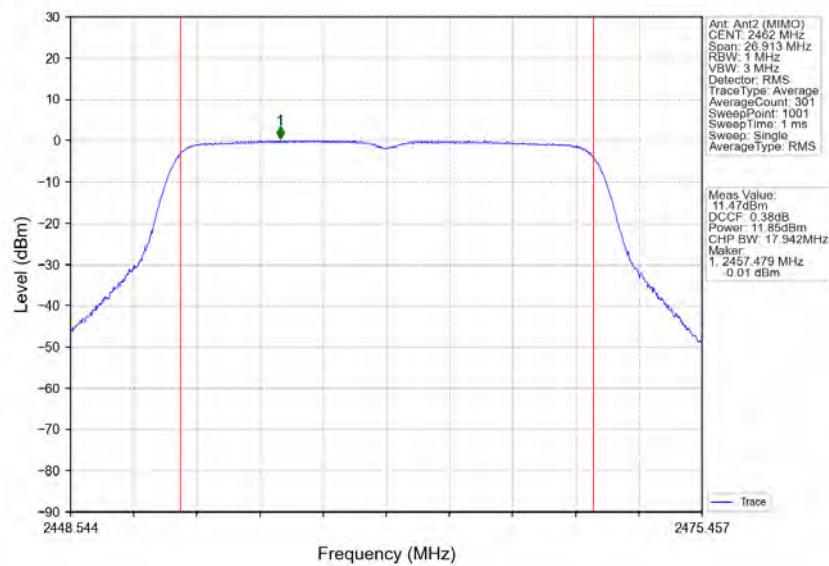

802.11n(HT40) LCH 2422MHz Ant1 (MIMO) NTVN

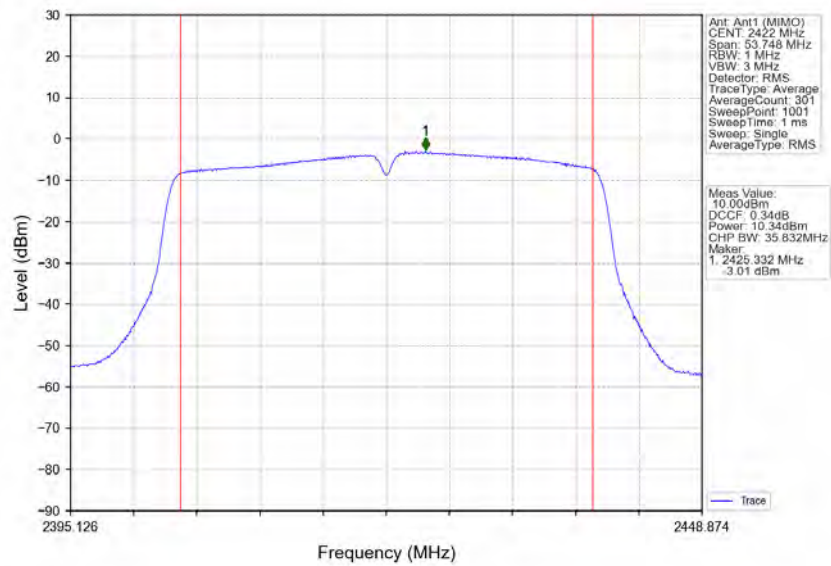

802.11n(HT40) LCH 2422MHz Ant2 (MIMO) NTVN

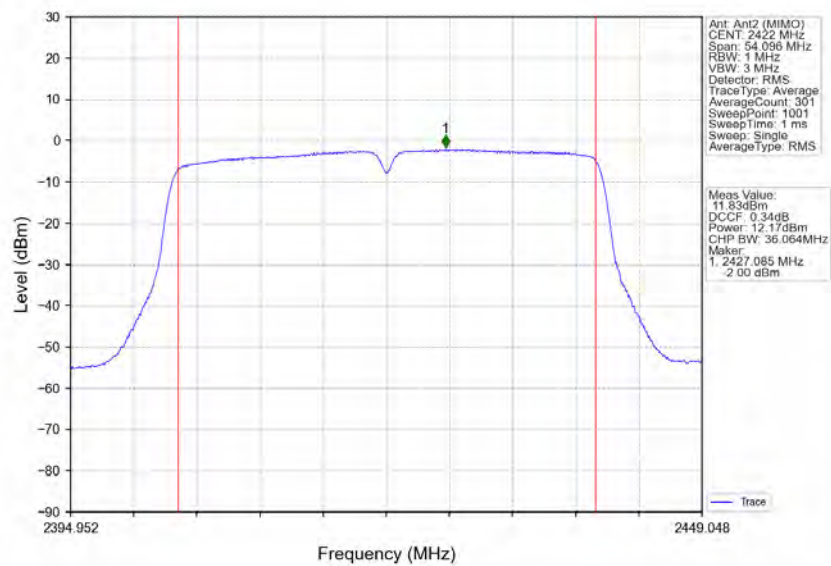


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 162 of 244


802.11n(HT40) MCH 2437MHz Ant1 (MIMO) NTNV

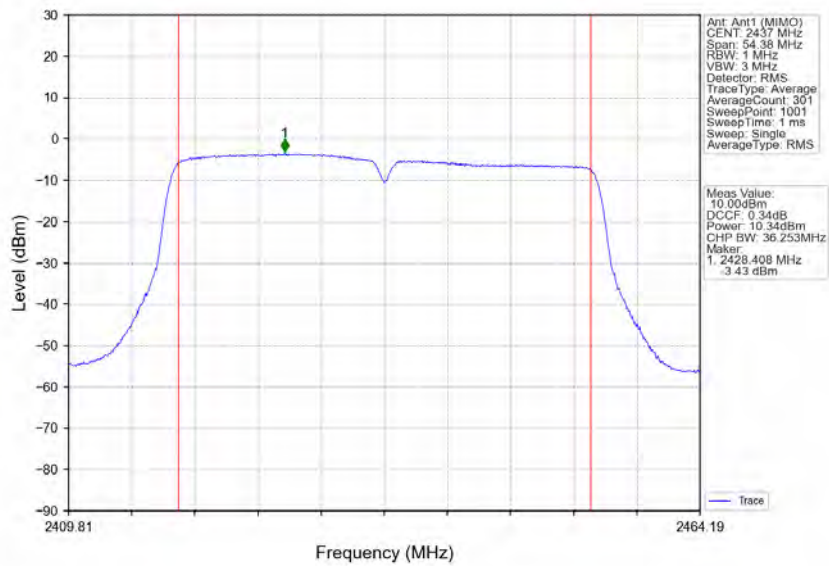


802.11n(HT40) MCH 2437MHz Ant2 (MIMO) NTNV

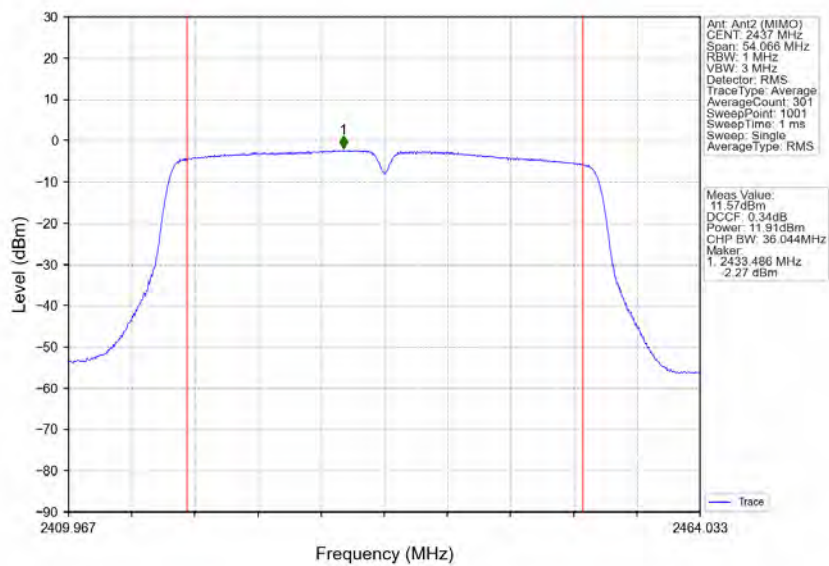

802.11n(HT40) HCH 2452MHz Ant1 (MIMO) NTN

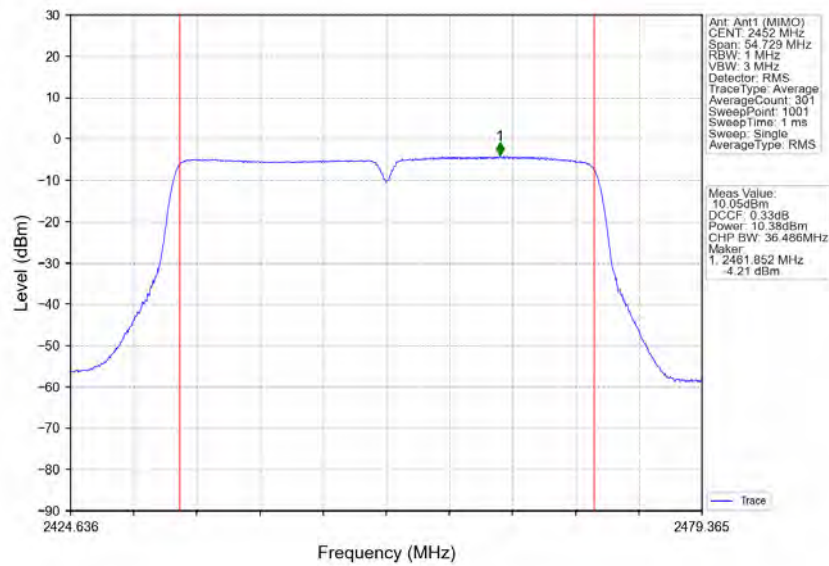

802.11n(HT40) HCH 2452MHz Ant2 (MIMO) NTN

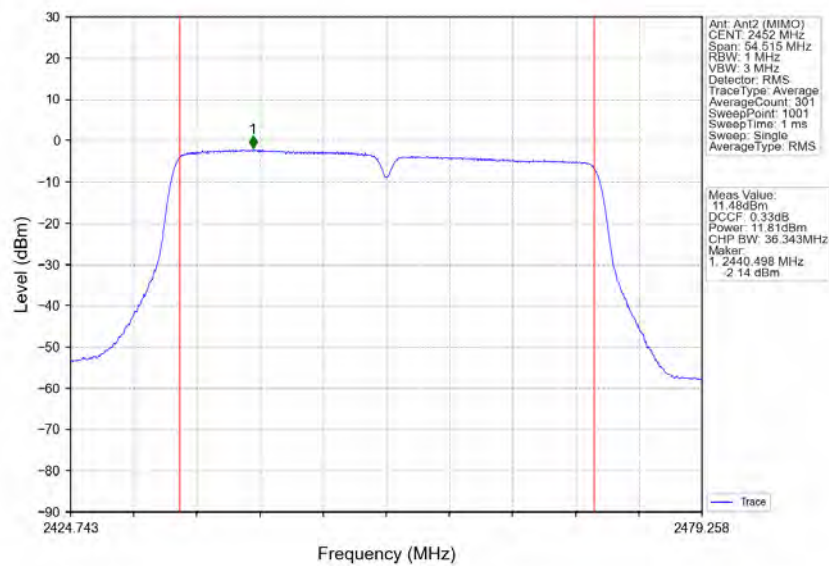


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 164 of 244


802.11ax(HEW20) LCH 2412MHz RU242 Left Ant1 (MIMO) NTNv

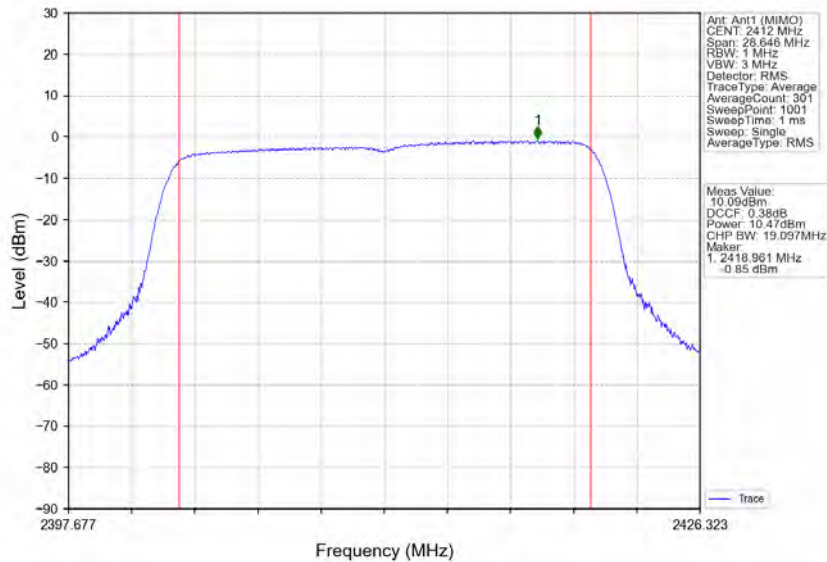


802.11ax(HEW20) LCH 2412MHz RU242 Left Ant2 (MIMO) NTNv

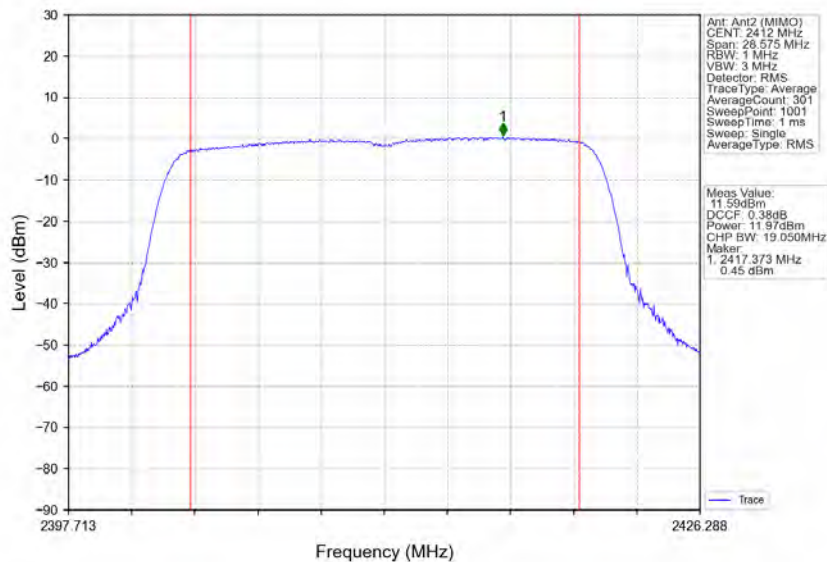

802.11ax(HEW20) MCH_2437MHz RU242 Left Ant1 (MIMO) NTN

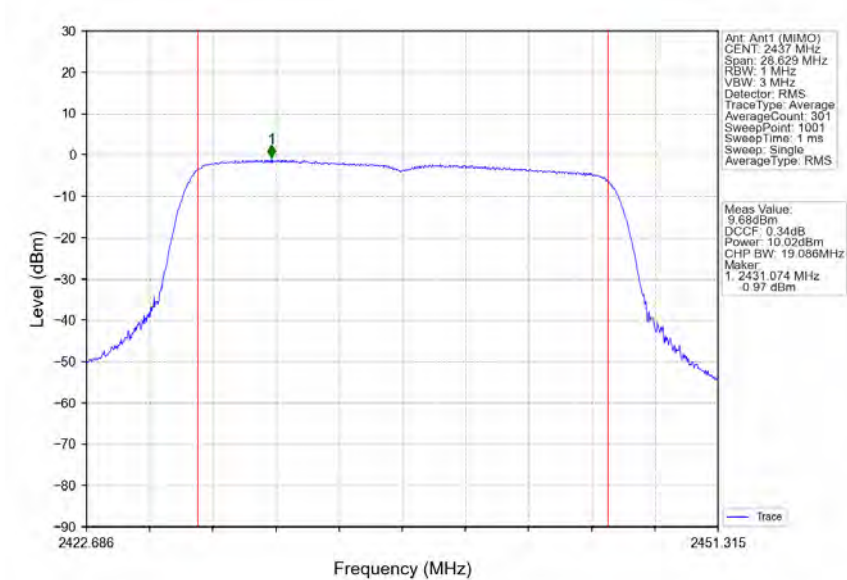

802.11ax(HEW20) MCH_2437MHz RU242 Left Ant2 (MIMO) NTN

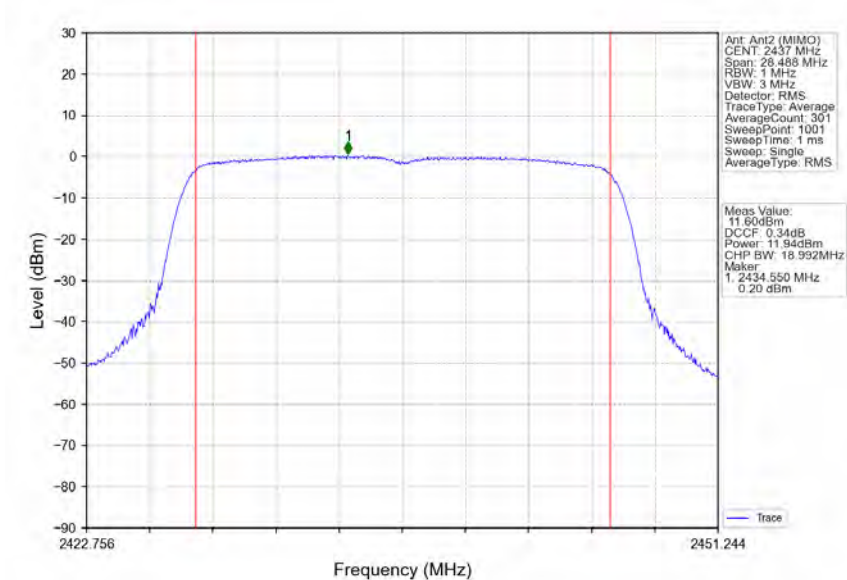


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 166 of 244


802.11ax(HEW20) HCH 2462MHz RU242 Left Ant1 (MIMO) NTN

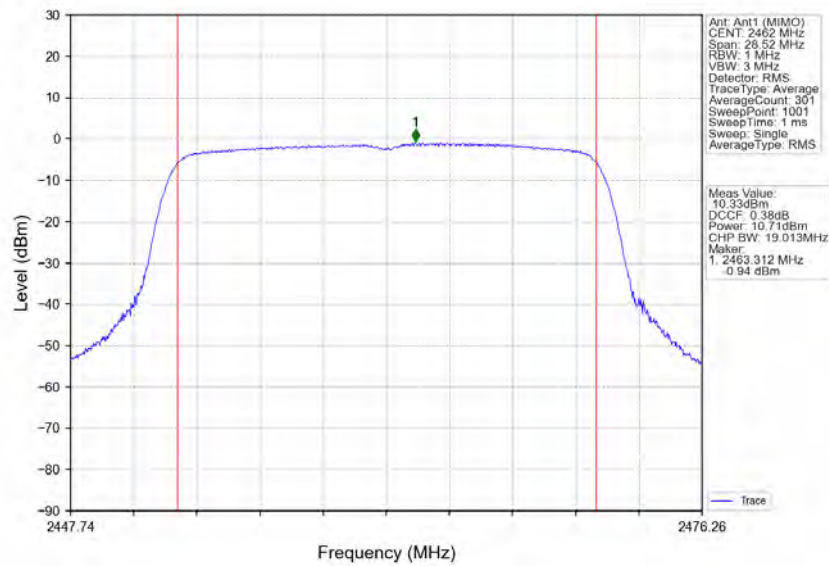


802.11ax(HEW20) HCH 2462MHz RU242 Left Ant2 (MIMO) NTN

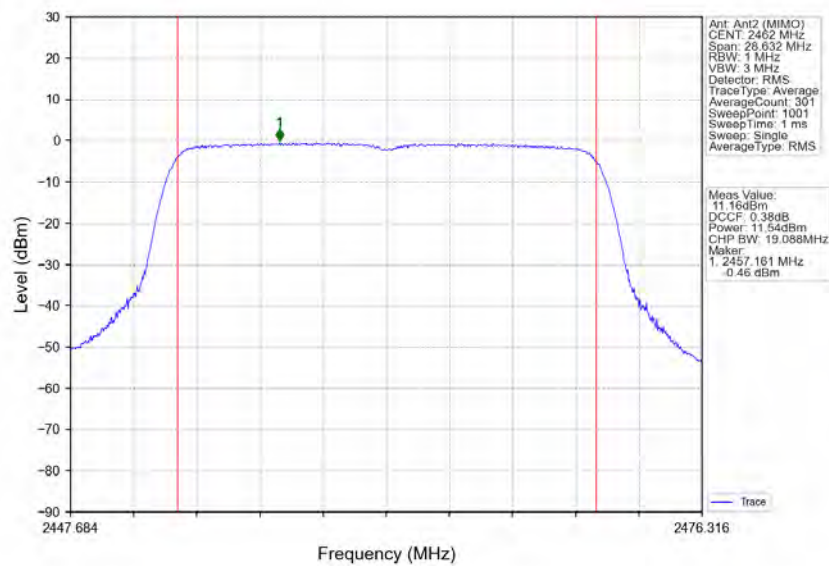


802.11ax(HEW40) LCH 2422MHz RU484 Left Ant1 (MIMO) NTN

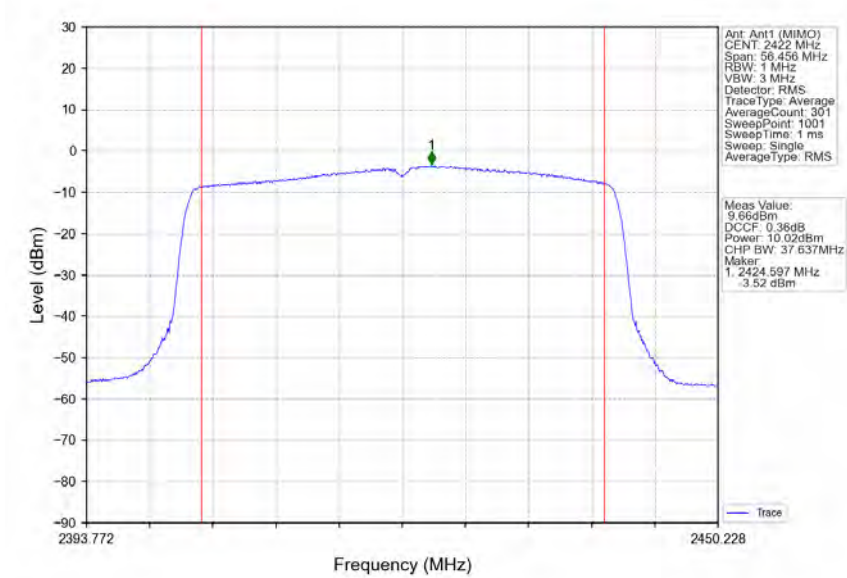


802.11ax(HEW40) LCH 2422MHz RU484 Left Ant2 (MIMO) NTN

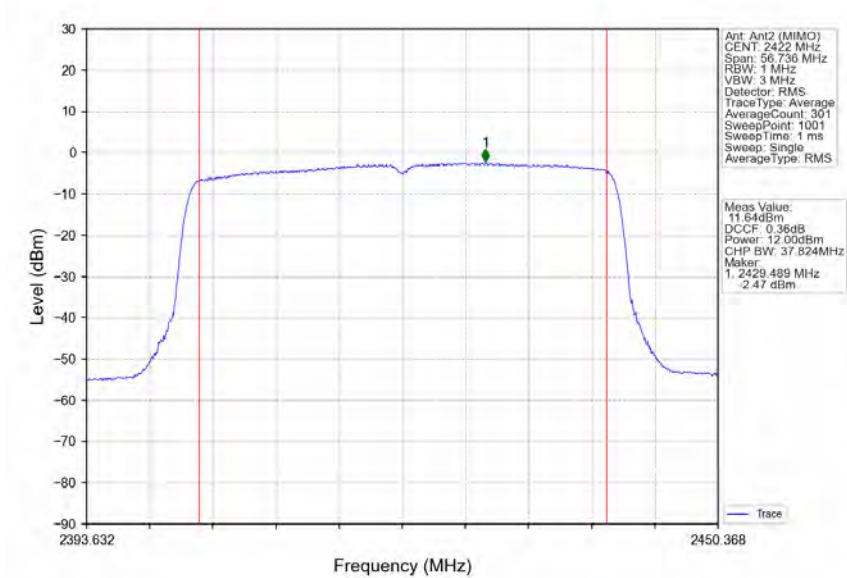

802.11ax(HEW40) MCH_2437MHz RU484 Left Ant1 (MIMO) NTN

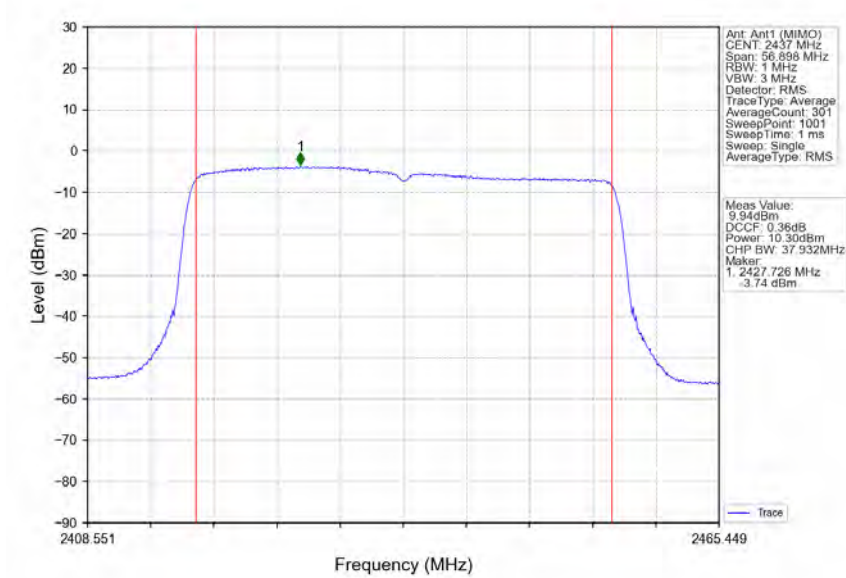

802.11ax(HEW40) MCH_2437MHz RU484 Left Ant2 (MIMO) NTN

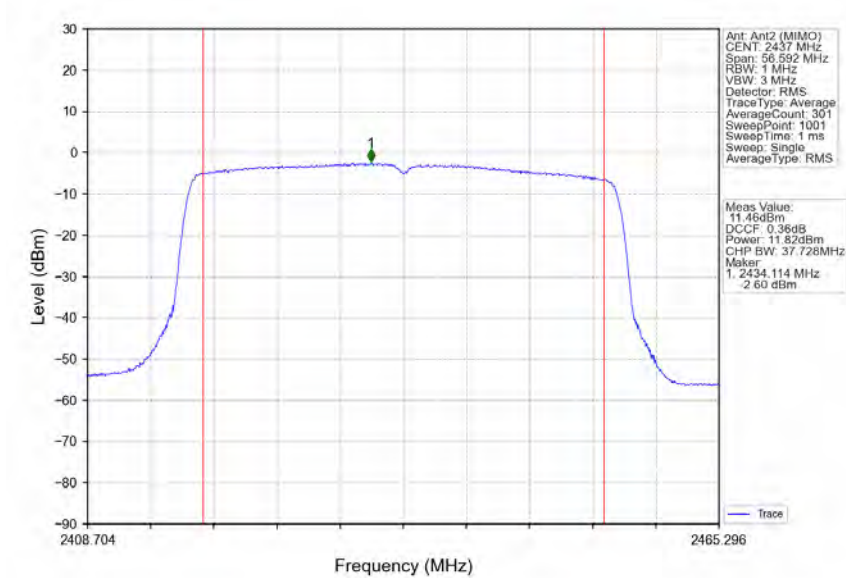


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 169 of 244

802.11ax(HEW40) HCH 2452MHz RU484 Left Ant1 (MIMO) NTN

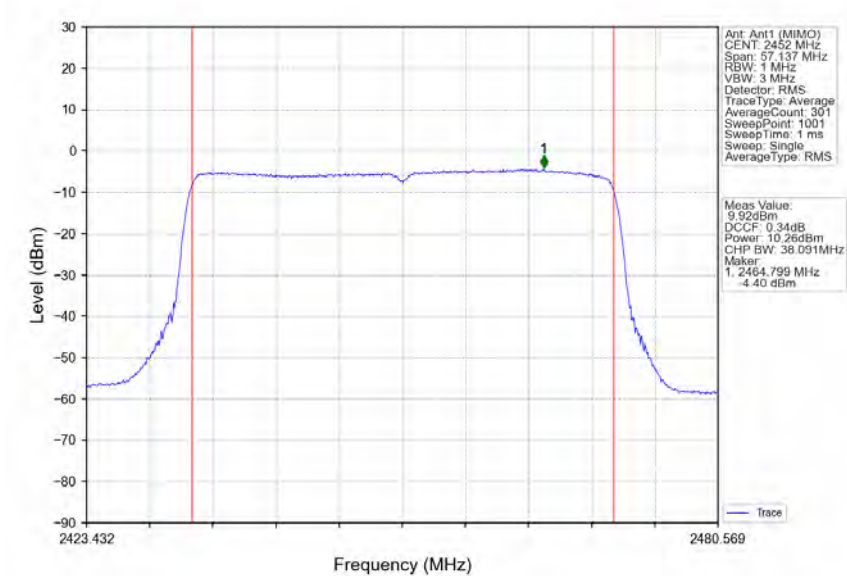

802.11ax(HEW40) HCH 2452MHz RU484 Left Ant2 (MIMO) NTN

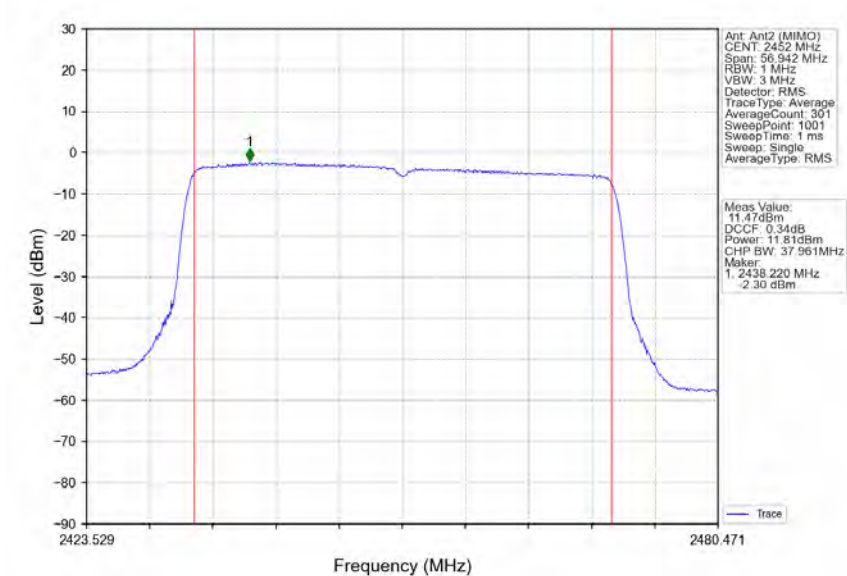

4. Maximum Power Spectral Density

4.1 Test Result


4.1.1 PSD

Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum PSD (dBm/3kHz)				Verdict
					ANT1	ANT2	MIMO	Limit	
802.11b	SISO	2412	/	/	-8.19	-6.62	/	<=8	Pass
		2437	/	/	-5.91	-7.92	/	<=8	Pass
		2462	/	/	-8.12	-8.69	/	<=8	Pass
802.11g	SISO	2412	/	/	-13.40	-12.86	/	<=8	Pass
		2437	/	/	-14.23	-11.72	/	<=8	Pass
		2462	/	/	-13.90	-13.21	/	<=8	Pass
802.11n (HT20)	MIMO	2412	/	/	-13.35	-13.33	-10.99	<=8	Pass
		2437	/	/	-14.01	-13.33	-12.24	<=8	Pass
		2462	/	/	-14.75	-13.93	-11.95	<=8	Pass
802.11n (HT40)	MIMO	2422	/	/	-17.50	-15.93	-14.31	<=8	Pass
		2437	/	/	-17.49	-16.05	-14.50	<=8	Pass
		2452	/	/	-18.49	-15.98	-15.34	<=8	Pass
802.11ax (HEW20)	MIMO	2412	RU242	Left	-15.84	-14.83	-13.76	<=8	Pass
		2437	RU242	Left	-16.33	-14.62	-13.08	<=8	Pass
		2462	RU242	Left	-15.21	-15.29	-13.25	<=8	Pass
802.11ax (HEW40)	MIMO	2422	RU484	Left	-18.00	-17.00	-15.22	<=8	Pass
		2437	RU484	Left	-18.51	-16.05	-15.04	<=8	Pass
		2452	RU484	Left	-18.70	-16.68	-15.70	<=8	Pass

Note1: Antenna Gain: Ant1: 2.10dBi; Ant2: 2.10dBi;
Note2: Directional Gain: Uncorrelated(Directional Gain = Ant Gain)

4.2 Test Graph

4.2.1 PSD

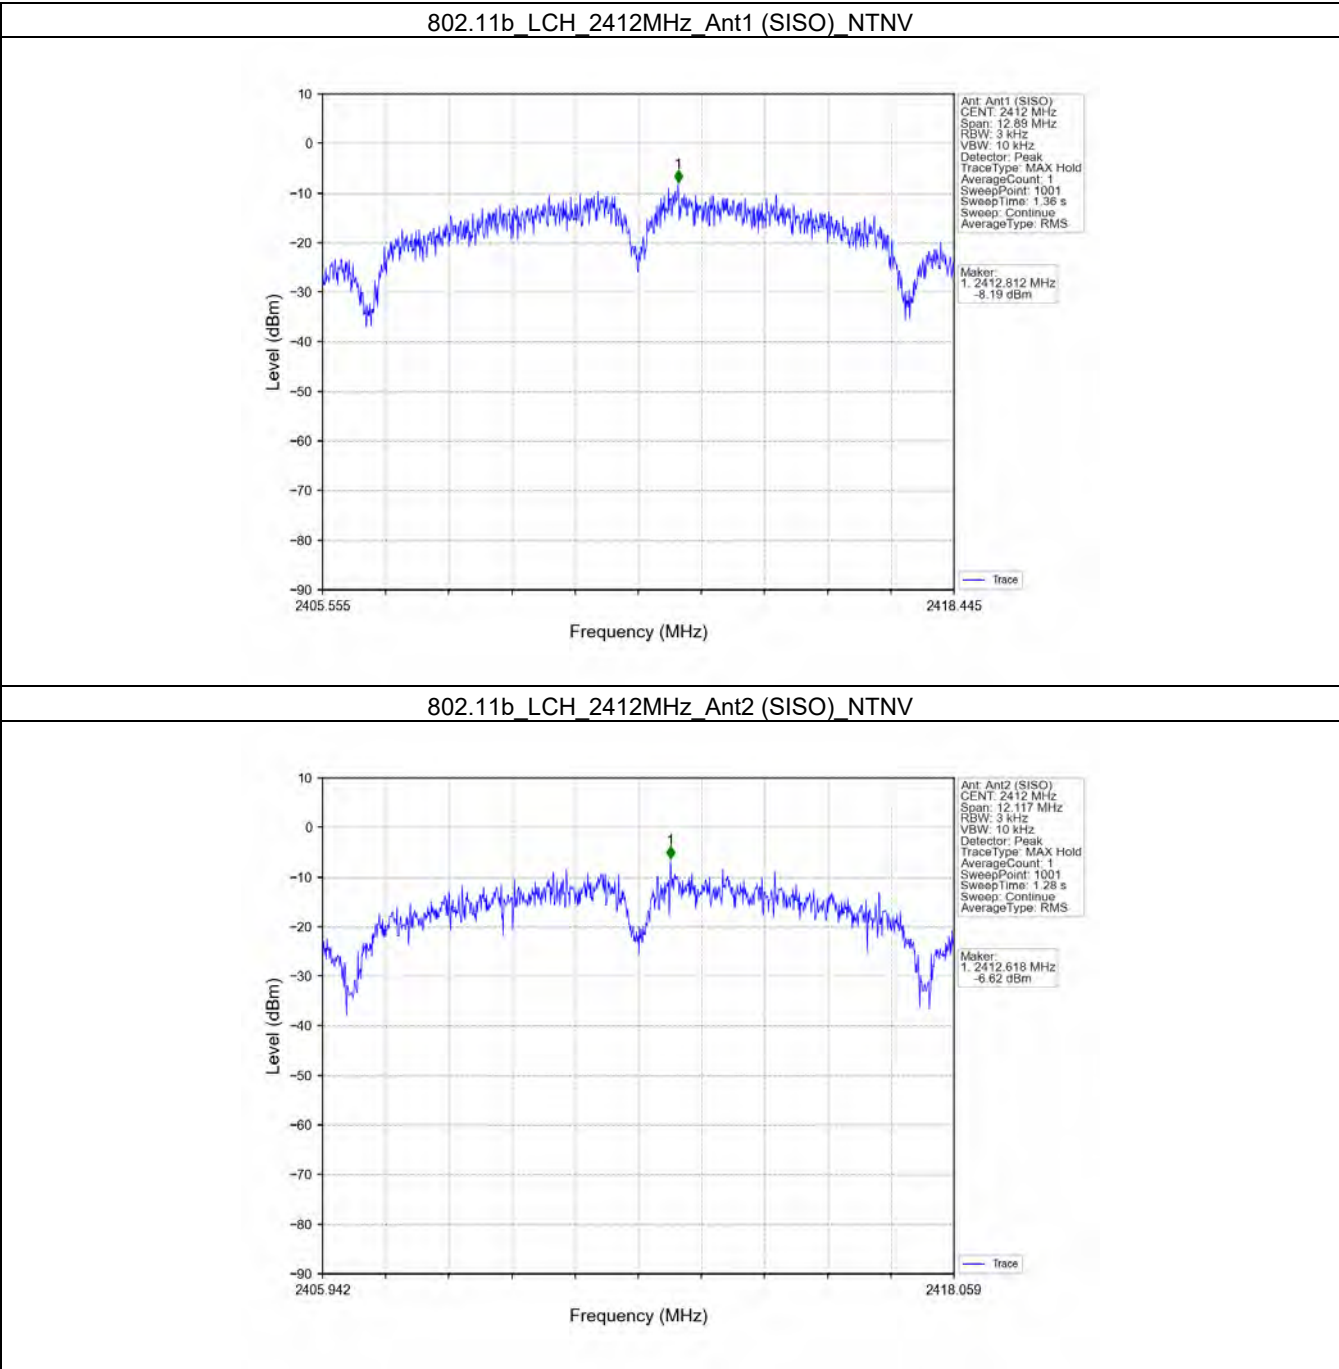


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240700123603

Page: 172 of 244

802.11b MCH 2437MHz Ant1 (SISO) NTN

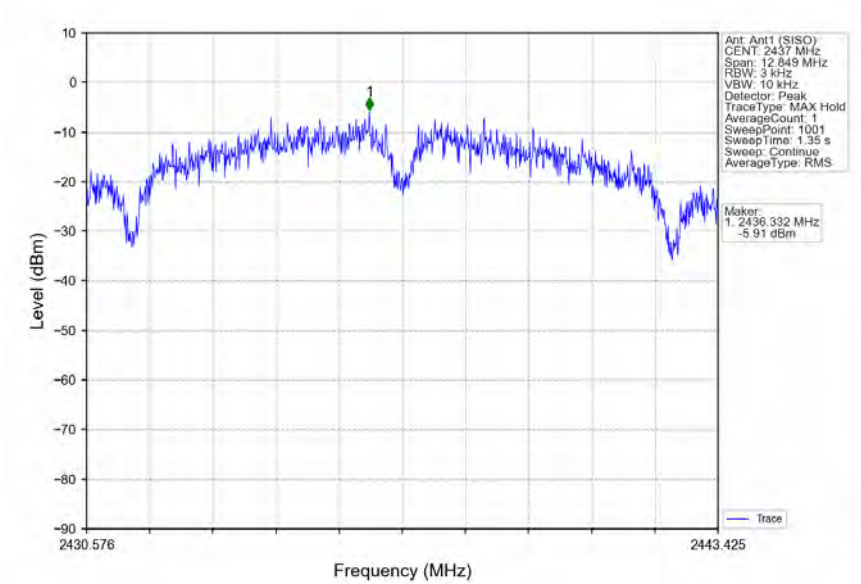

802.11b MCH 2437MHz Ant2 (SISO) NTN

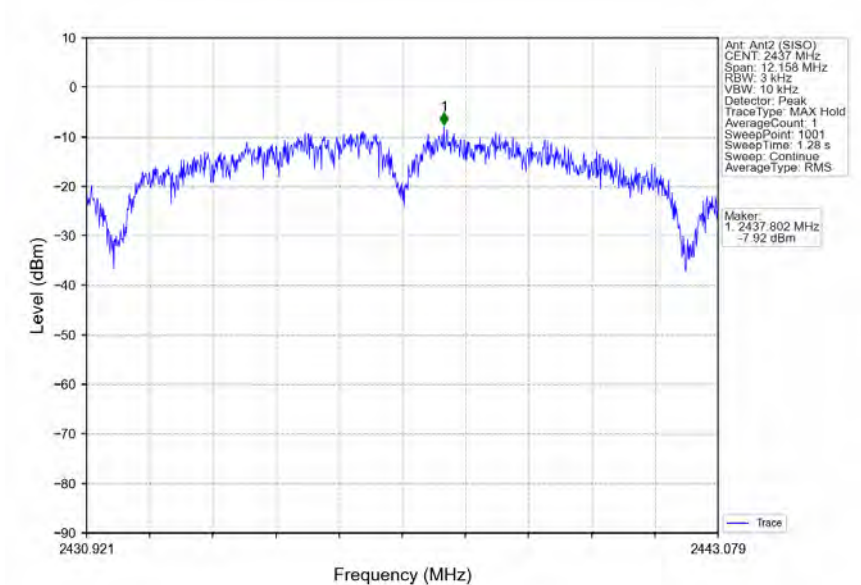


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240700123603

Page: 173 of 244

802.11b HCH 2462MHz Ant1 (SISO) NTN

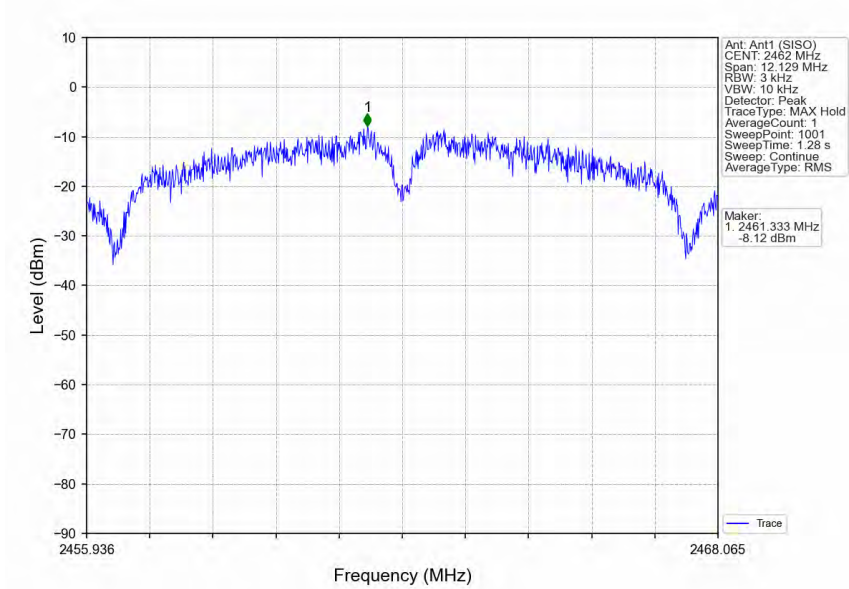

802.11b HCH 2462MHz Ant2 (SISO) NTN

