



# TEST REPORT

No.I22N01936-WLAN 2.4GHz

for

**Shanghai Sunmi Technology Co.,Ltd.**

**Cloud POS Priter**

**Model Name: NT311**

with

**Hardware Version: V2.0**

**Software Version: FW3.0.3 & APP 3.0.3**

**FCC ID: 2AH25NT311S**

**Issued Date: 2022-10-21**

**Designation Number: CN1210**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

**Test Laboratory:**

**SAICT, Shenzhen Academy of Information and Communications Technology**

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen,  
Guangdong, P. R. China 518000.

Tel:+86(0)755-33322000, Fax:+86(0)755-33322001

Email: yewu@caict.ac.cn www.saict.ac.cn

©Copyright. All rights reserved by SAICT.



## **CONTENTS**

<b>CONTENTS .....</b>	<b>2</b>
<b>1. SUMMARY OF TEST REPORT .....</b>	<b>3</b>
1.1. TEST ITEMS .....	3
1.2. TEST STANDARDS .....	3
1.3. TEST RESULT .....	3
1.4. TESTING LOCATION .....	3
1.5. PROJECT DATA .....	3
1.6. SIGNATURE .....	3
<b>2. CLIENT INFORMATION .....</b>	<b>4</b>
2.1. APPLICANT INFORMATION .....	4
2.2. MANUFACTURER INFORMATION .....	4
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>5</b>
3.1. ABOUT EUT .....	5
3.2. INTERNAL IDENTIFICATION OF EUT .....	5
3.3. INTERNAL IDENTIFICATION OF AE .....	5
3.4. GENERAL DESCRIPTION .....	6
<b>4. REFERENCE DOCUMENTS .....</b>	<b>7</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	7
4.2. REFERENCE DOCUMENTS FOR TESTING .....	7
<b>5. TEST RESULTS .....</b>	<b>8</b>
5.1. TESTING ENVIRONMENT .....	8
5.2. TEST RESULTS .....	8
5.3. STATEMENTS .....	8
<b>6. TEST EQUIPMENTS UTILIZED .....</b>	<b>9</b>
<b>7. LABORATORY ENVIRONMENT .....</b>	<b>10</b>
<b>8. MEASUREMENT UNCERTAINTY .....</b>	<b>11</b>
<b>ANNEX A: DETAILED TEST RESULTS .....</b>	<b>12</b>
TEST CONFIGURATION .....	12
A.0 ANTENNA REQUIREMENT .....	15
A.1 MAXIMUM OUTPUT POWER .....	16
A.2 PEAK POWER SPECTRAL DENSITY .....	17
A.3 6dB BANDWIDTH .....	23
A.4 BAND EDGES COMPLIANCE .....	29
A.5 CONDUCTED EMISSION .....	33
A.6 RADIATED EMISSION .....	48
A.7 AC POWER LINE CONDUCTED EMISSION .....	60



## **1. Summary of Test Report**

### **1.1. Test Items**

Product Name	Cloud POS Priter
Model Name	NT311
Applicant's name	Shanghai Sunmi Technology Co.,Ltd.
Manufacturer's Name	Shanghai Sunmi Technology Co.,Ltd.

### **1.2. Test Standards**

FCC Part15-2019; ANSI C63.10-2013.

### **1.3. Test Result**

#### **Pass**

Please refer to "5.2. Test Results"

### **1.4. Testing Location**

Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road,  
Futian District, Shenzhen, Guangdong, P. R. China

### **1.5. Project data**

Testing Start Date:	2022-09-24
Testing End Date:	2022-10-20

### **1.6. Signature**

---

**Lin Zechuang**  
**(Prepared this test report)**

---

**An Ran**  
**(Reviewed this test report)**

---

**Zhang Bojun**  
**(Approved this test report)**



## **2. Client Information**

### **2.1.Applicant Information**

Company Name: Shanghai Sunmi Technology Co.,Ltd.  
Address: Room 505, NO.388 Song Hu Road, Yang Pu District, Shanghai  
200433, China  
Contact Person Emma Yang  
E-Mail chan.yang@sunmi.com  
Telephone: 13510126210  
Fax: /

### **2.2.Manufacturer Information**

Company Name: Shanghai Sunmi Technology Co.,Ltd.  
Address: Room 505, NO.388 Song Hu Road, Yang Pu District, Shanghai  
200433, China  
Contact Person Emma Yang  
E-Mail chan.yang@sunmi.com  
Telephone: 13510126210  
Fax: /



### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Product Name	Cloud POS Priter
Model Name	NT311
RF Protocol	IEEE 802.11b/g/n-HT20
Operating Frequency	ISM 2412MHz~2462MHz
Type of Modulation	DSSS/CCK/OFDM
Antenna Type	Integrated antenna
Antenna Gain	2.3dBi
Power Supply	4V DC by External Power Supply
FCC ID	2AH25NT311S
Condition of EUT as received	No abnormality in appearance

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Shenzhen Academy of Information and Communications Technology.

#### **3.2. Internal Identification of EUT**

<b>EUT ID*</b>	<b>IMEI</b>	<b>HW Version</b>	<b>SW Version</b>	<b>Receive Date</b>
UT03aa	N45D28X0050	V2.0	FW3.0.3 & APP 3.0.3	2022-09-21
UT01aa	N45D28X0042	V2.0	FW3.0.3 & APP 3.0.3	2022-09-21

\*EUT ID: is used to identify the test sample in the lab internally.

UT03aa is used for conduction test, UT01aa is used for radiation test and AC Power line Conducted Emission test.

#### **3.3. Internal Identification of AE**

<b>AE ID*</b>	<b>Description</b>	<b>AE ID*</b>
AE1	Charger	/
AE2	PC	/
AE3	cashbox	/
AE34	USB Cable	/

##### **AE1**

Model	CYSE65-240250
Manufacturer	Jiangsu Chenyang Electron co.,Ltd.

##### **AE2**

Model	/
Manufacturer	/

##### **AE3**

Model	/
Manufacturer	/

##### **AE4**

Model	/
Manufacturer	/



\*AE ID: is used to identify the test sample in the lab internally.

### **3.4. General Description**

The Equipment under Test (EUT) is a model of Smart Phone with integrated antenna.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.



## **4. Reference Documents**

### **4.1. Documents supplied by applicant**

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

### **4.2. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz	2019
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013



## 5. Test Results

### 5.1. Testing Environment

Normal Temperature: 15~35°C

Relative Humidity: 20~75%

### 5.2. Test Results

No	Test cases	Sub-clause of Part 15C	Verdict
0	Antenna Requirement	15.203	<b>P</b>
1	Maximum Output Power	15.247 (b)	<b>P</b>
2	Peak Power Spectral Density	15.247 (e)	<b>P</b>
3	6dB Bandwidth	15.247 (a)	<b>P</b>
4	Band Edges Compliance	15.247 (d)	<b>P</b>
5	Conducted Emission	15.247 (d)	<b>P</b>
6	Radiated Emission	15.247, 15.205, 15.209	<b>P</b>
7	AC Power line Conducted	15.207	<b>P</b>

See **ANNEX A** for details.

### 5.3. Statements

SAICT has evaluated the test cases requested by the applicant/manufacture as listed in section 5.2 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2.

Disclaimer:

A. After confirmation with the customer, the sample information provided by the customer may affect the validity of the measurement results in this report, and the impact and consequences arising therefrom shall be borne by the customer.

B. The samples in this report are provided by the customer, and the test results are only applicable to the samples received.





## 6. Test Equipments Utilized

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Vector Signal Analyzer	FSV40	100903	Rohde & Schwarz	2022-12-29	1 year
2	Power Sensor	U2021XA	MY55430013	Keysight	2022-12-29	1 year
3	Data Acquisition	U2531A	TW55443507	Keysight	/	/
4	RF Control Unit	JS0806-2	21C8060398	Tonscend	2023-05-08	1 year

### Radiated test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Test Receiver	ESR7	101676	Rohde & Schwarz	2022-11-24	1 year
2	BiLog Antenna	3142E	0224831	ETS-Lindgren	2024-05-27	3 years
3	Horn Antenna	3117	00066577	ETS-Lindgren	2025-04-17	3 years
4	Horn Antenna	QSH-SL-1 8-26-S-20	17013	Q-par	2023-01-06	3 years
5	Horn Antenna	QSH-SL-8- 26-40-K-20	17014	Q-par	2023-01-06	3 years
6	Anechoic Chamber	FACT3-2.0	1285	ETS-Lindgren	2023-05-29	2 years
7	Spectrum Analyzer	FSV40	101192	Rohde & Schwarz	2023-01-12	1 year
8	Loop Antenna	HLA6120	35779	TESEQ	2025-05-12	3 years
9	Test Receiver	ESCI	100701	Rohde & Schwarz	2023-08-07	1 year
10	LISN	ENV216	102067	Rohde & Schwarz	2023-07-14	1 year

### Test software

No.	Equipment	Manufacturer	Version
1	JS1120-3	Tonscend	3.2
2	EMC32	Rohde & Schwarz	10.50.40

EUT is engineering software provided by the customer to control the transmitting signal. The EUT was programmed to be in continuously transmitting mode.



## 7. Laboratory Environment

### Shielded room

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2M $\Omega$
Ground system resistance	< 4 $\Omega$

### Anechoic chamber

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2M $\Omega$
Ground system resistance	< 4 $\Omega$
Normalised site attenuation (NSA)	< $\pm 4$ dB, 3 m distance, from 30 to 1000 MHz
Voltage Standing Wave Ratio (VSWR)	$\leq 6$ dB, from 1 to 18 GHz, 3m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz



**8. Measurement Uncertainty**

Test Name	Uncertainty ( $k=2$ )	
1. Maximum Peak Output Power	1.32dB	
2. Peak Power Spectral Density	1.32dB	
3. 6dB Bandwidth	4.56kHz	
4. Band Edges Compliance	1.92dB	
5. Transmitter Spurious Emission - Conducted	30MHz≤f<1GHz	1.41dB
	1GHz≤f<7GHz	1.92dB
	7GHz≤f<13GHz	2.31dB
	13GHz≤f≤26GHz	2.61dB
6. Transmitter Spurious Emission - Radiated	9kHz≤f<30MHz	1.79dB
	30MHz≤f<1GHz	4.86dB
	1GHz≤f<18GHz	4.50dB
	18GHz≤f≤40GHz	2.90dB
7. AC Power line Conducted Emission	150kHz≤f≤30MHz	2.62dB


## **ANNEX A: Detailed Test Results**

### **Test Configuration**

The measurement is made according to ANSI C63.10.

#### **1) Conducted Measurements**

1. Connect the EUT to the test system correctly.
2. Set the EUT to the required work mode.
3. Set the EUT to the required channel.
4. Set the spectrum analyzer to start measurement.
5. Record the values.




#### **2) Radiated Measurements**

##### **Test setup:**

##### **9kHz-30MHz:**

The EUT are measured in an anechoic chamber. The EUT is placed on a non-conductive stand of 80cm high, and at a measurement distance of 3m from the receiving antenna. The center of the receiving loop antenna is 1.0 meter above the ground. The test setup refers to figure below.


Detected emissions were maximized at each frequency by rotating the EUT and adjusting the receiver antenna polarization.

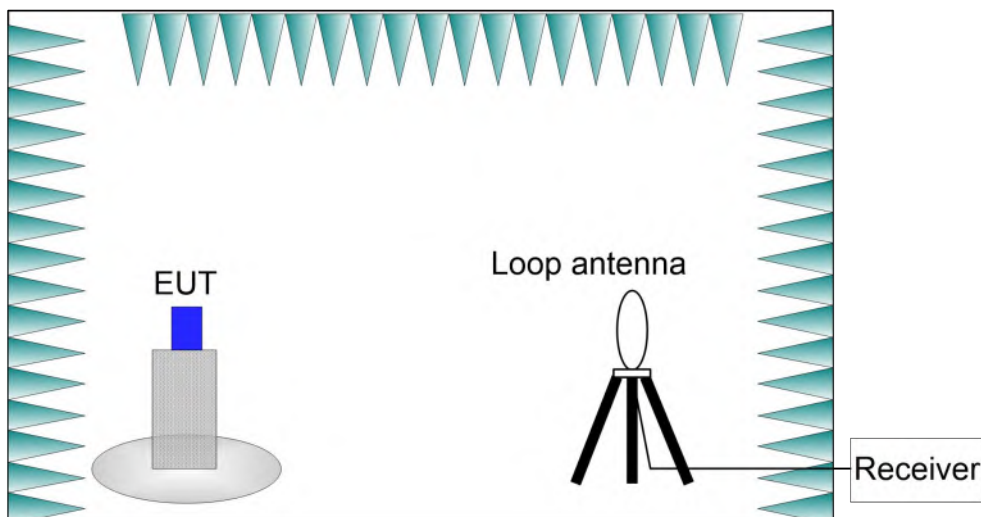


**30MHz-26.5GHz:**

The EUT are measured in a anechoic chamber. The EUT is placed on a non-conductive stand of 80cm high, and at a measurement distance of 3m from the receiving antenna. The center of the receiving antenna is 1.0 meter to 4.0 meter above the ground. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT and adjusting the receiver antenna polarization.


**30MHz-1GHz:**

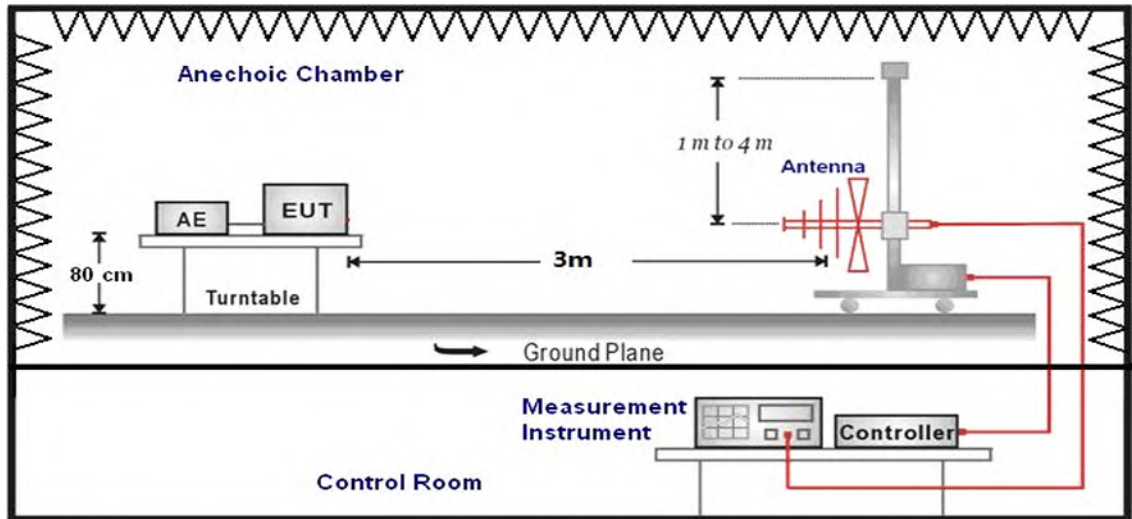

**1GHz-3G:**

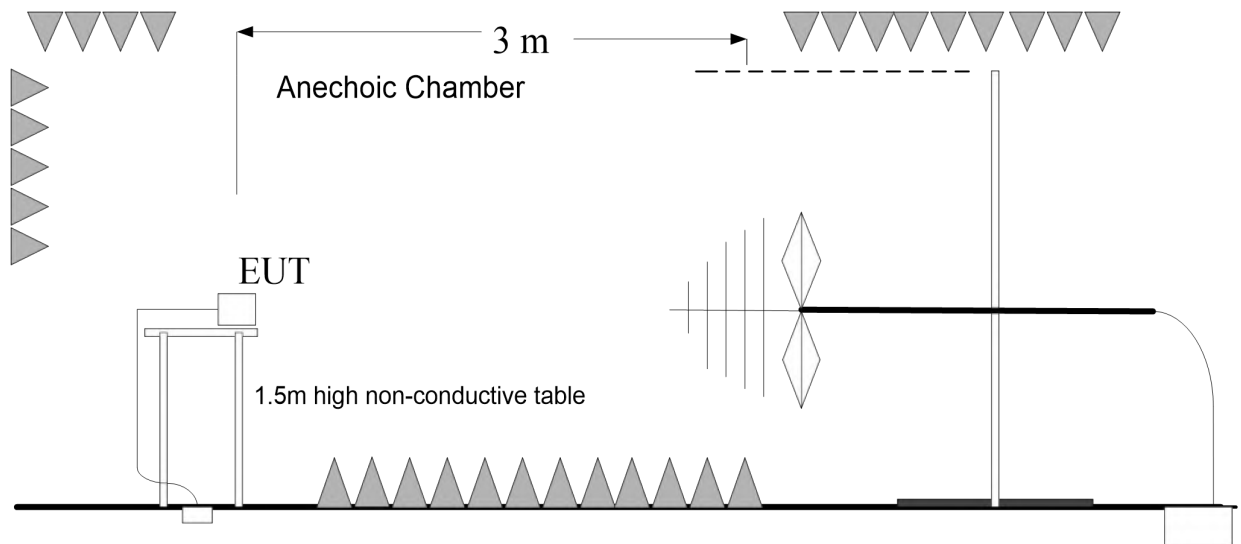


**3GHz-26.5G:**

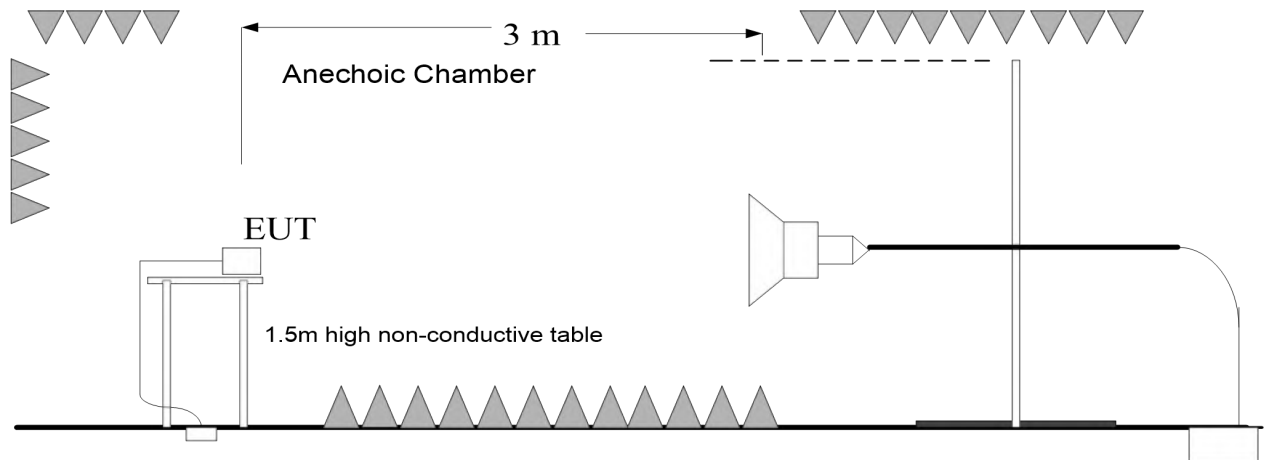

**3) AC Power line Conducted Emission Measurement**

For Bluetooth LE, the EUT is working under test mode. The EUT is commanded to operate at maximum transmitting power.

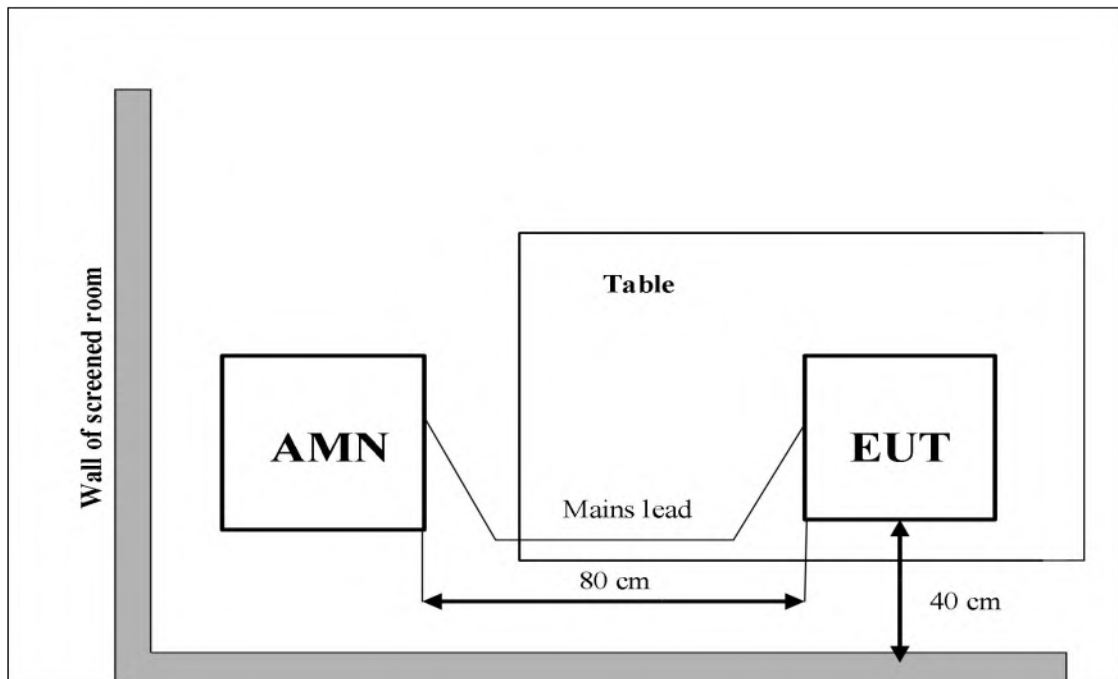



### A.0 Antenna requirement

#### Measurement Limit:

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

**Conclusion: The Directional gains of antenna used for transmitting is 2.3dBi.  
The RF transmitter uses an integrate antenna without connector.**



### A.1 Maximum Output Power

**Measurement of method: See ANSI C63.10-2013-Clause 11.9.2.3.2.**

Method AVGPM-G is a measurement using a gated RF average power meter.

Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

**Measurement Limit:**

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30

**Measurement Results:**

Mode	RF output power (dBm)		
	2412MHz (CH1)	2437MHz (CH6)	2462MHz (CH11)
802.11b	12.74	12.84	12.82
802.11g	12.62	12.63	12.71
802.11n-HT20	12.49	12.52	12.54

**Note:**

The data rate 1Mbps (11b mode), 6Mbps (11g mode), MCS0 (11n mode) are selected as the Worst-Case. The following cases and test graphs are performed with this condition.

The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

**Conclusion: PASS**





### A.2 Peak Power Spectral Density

Method of Measurement: See ANSI C63.10-clause 11.10.2.

Measurement Limit:

Standard	Limit (dBm/10 kHz)
FCC CRF Part 15.247(e)	< 8

Measurement Results:

Mode	Frequency (MHz)	Test Results(dBm/10 kHz)		Conclusion
802.11b	2412(CH1)	Fig.1	-6.25	<b>P</b>
	2437(CH6)	Fig.2	-7.23	<b>P</b>
	2462(CH11)	Fig.3	-7.32	<b>P</b>
802.11g	2412(CH1)	Fig.4	-8.81	<b>P</b>
	2437(CH6)	Fig.5	-9.29	<b>P</b>
	2462(CH11)	Fig.6	-9.21	<b>P</b>
802.11n-HT20	2412(CH1)	Fig.7	-8.65	<b>P</b>
	2437(CH6)	Fig.8	-8.76	<b>P</b>
	2462(CH11)	Fig.9	-7.81	<b>P</b>

See below for test graphs.

Conclusion: **PASS**

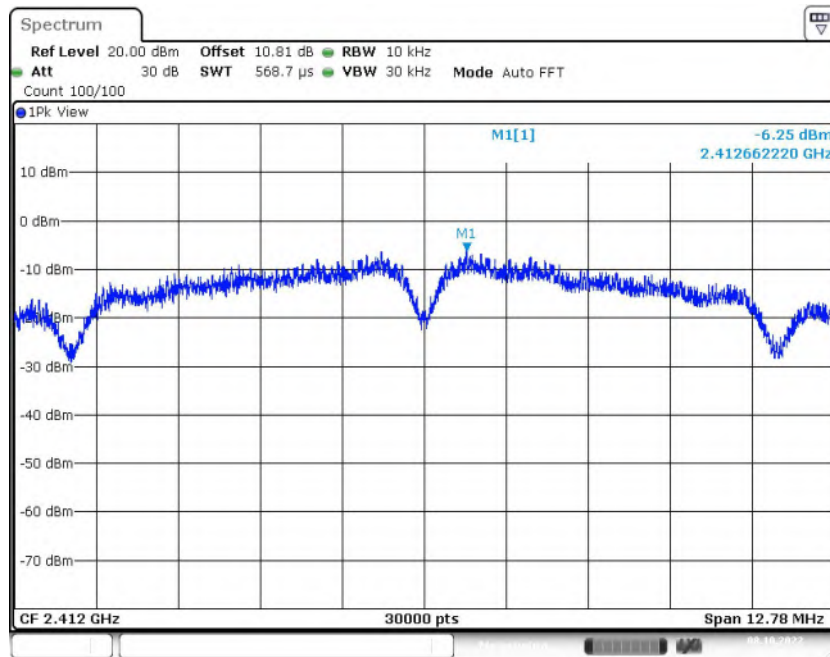


Fig.1 Power Spectral Density (802.11b, CH1)

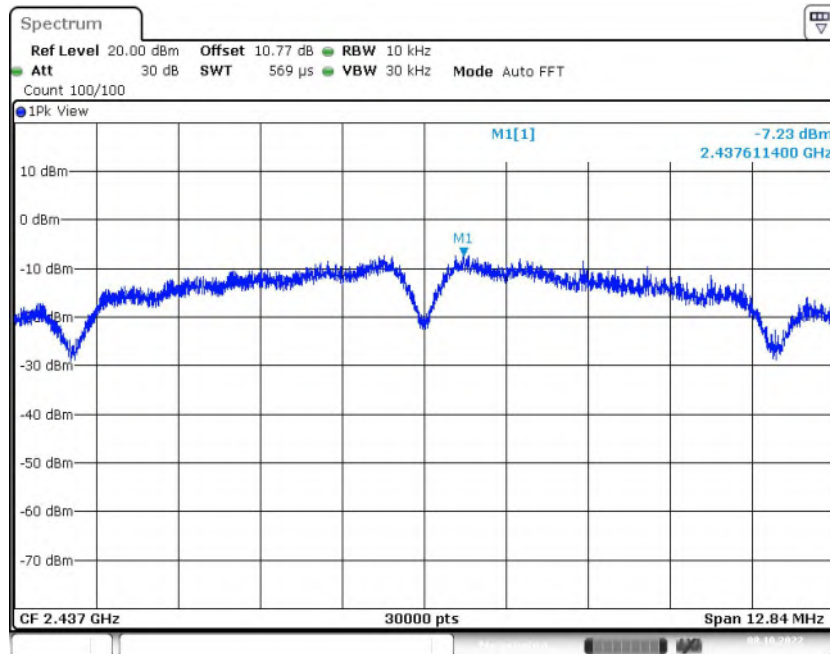


Fig.2 Power Spectral Density (802.11b, CH6)

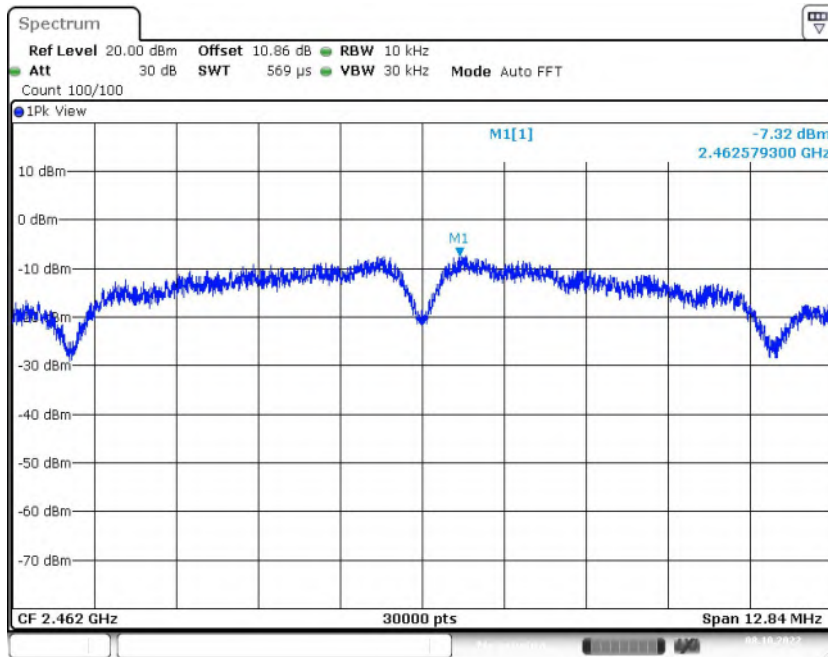


Fig.3 Power Spectral Density (802.11b, CH11)

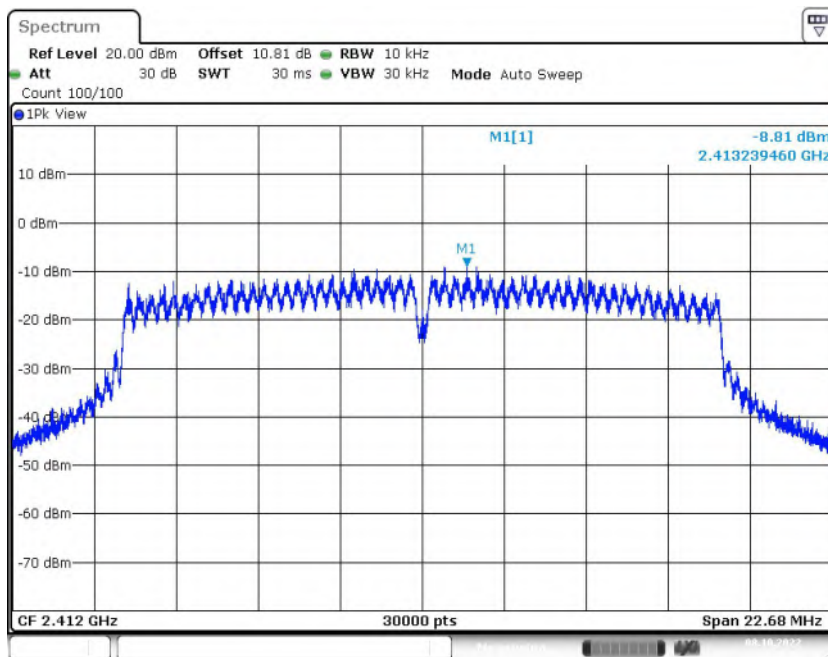


Fig.4 Power Spectral Density (802.11g, CH1)

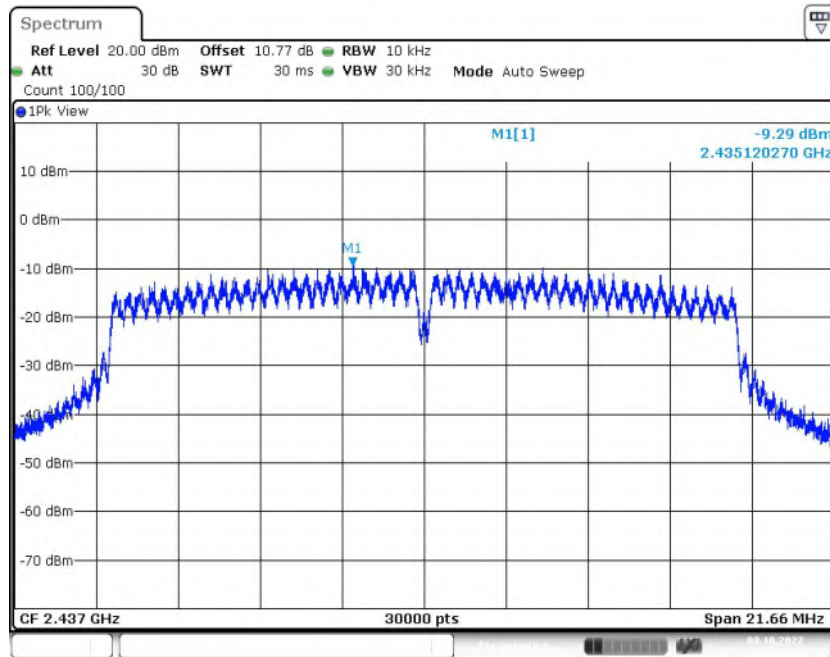


Fig.5 Power Spectral Density (802.11g, CH6)

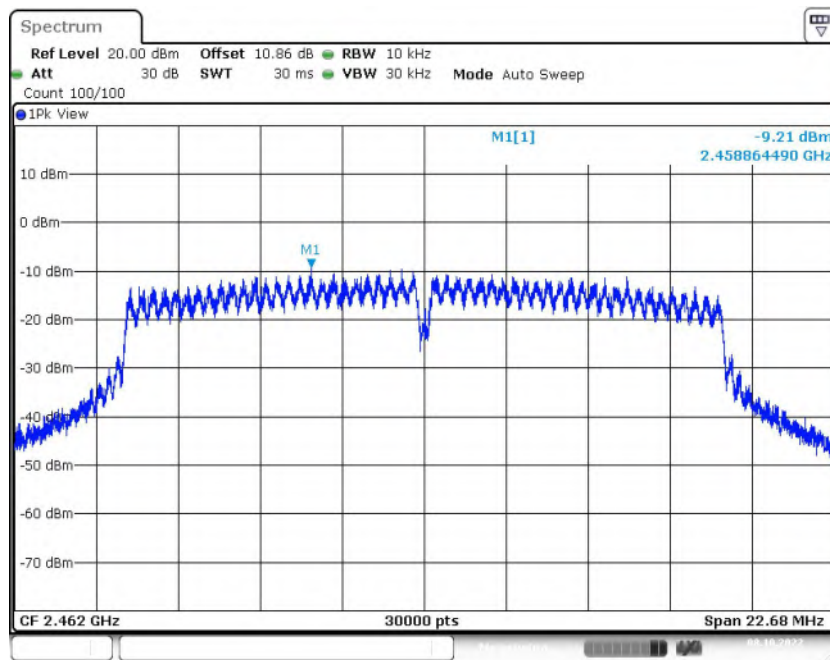


Fig.6 Power Spectral Density (802.11g, CH11)

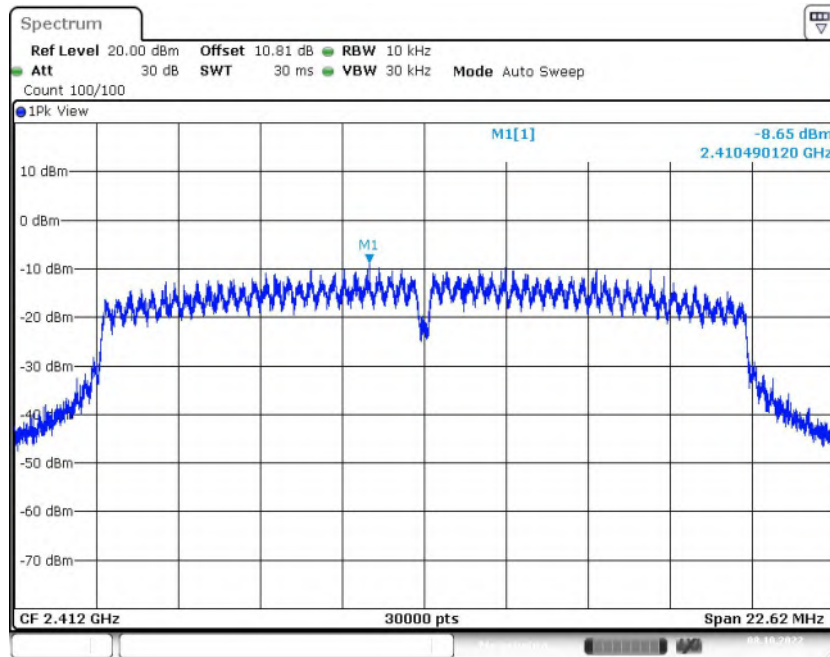


Fig.7 Power Spectral Density (802.11n-HT20, CH1)

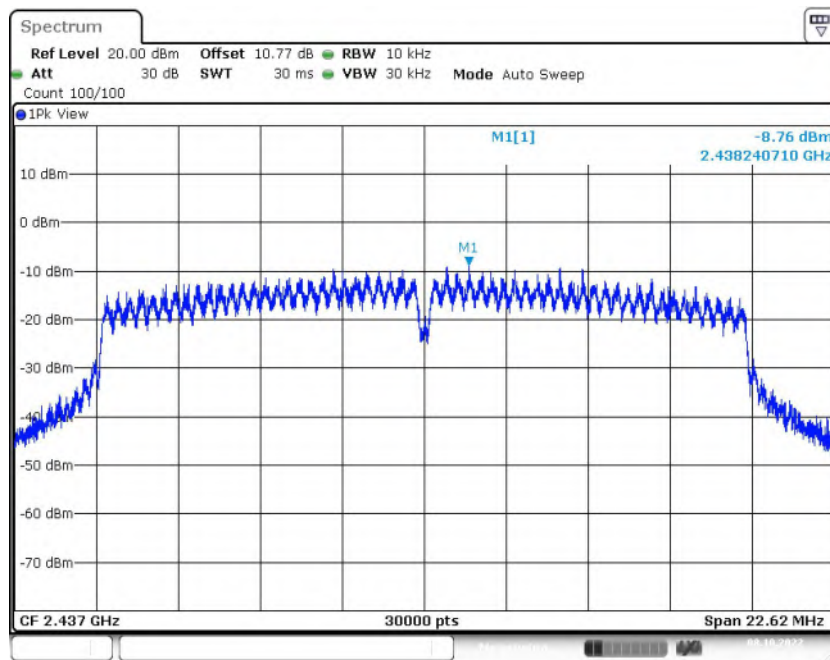


Fig.8 Power Spectral Density (802.11n-HT20, CH6)

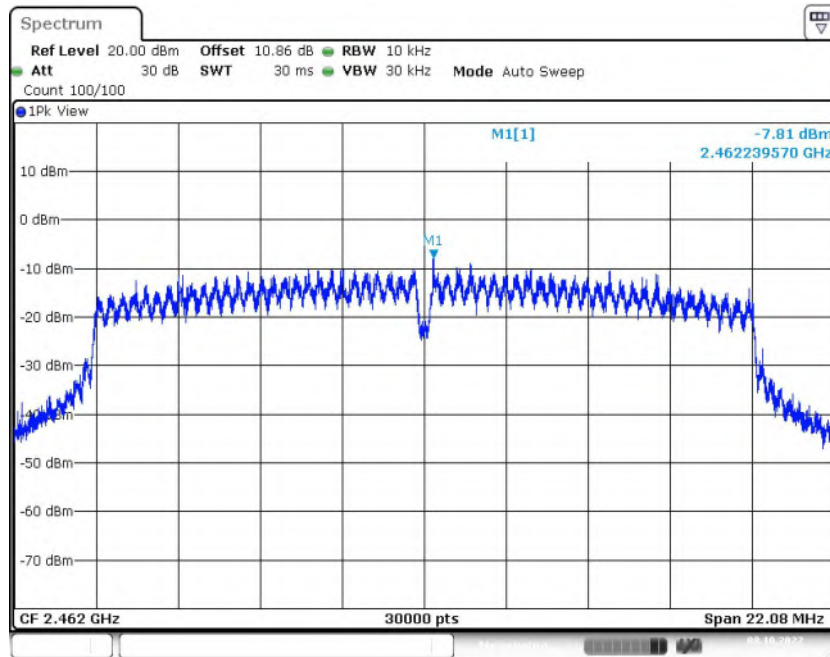


Fig.9 Power Spectral Density (802.11n-HT20, CH11)



### A.3 6dB Bandwidth

Method of Measurement: See ANSI C63.10-clause 11.8.2.

Measurement Limit:

Standard	Limit (MHz)
FCC 47 CFR Part 15.247 (a)	≥ 0.5

Measurement Result:

Mode	Frequency (MHz)	Test Results (MHz)		Conclusion
		Fig.	Value	
802.11b	2412(CH1)	Fig.10	8.52	P
	2437(CH6)	Fig.11	8.56	P
	2462(CH11)	Fig.12	8.56	P
802.11g	2412(CH1)	Fig.13	15.12	P
	2437(CH6)	Fig.14	14.44	P
	2462(CH11)	Fig.15	15.12	P
802.11n-HT20	2412(CH1)	Fig.16	15.08	P
	2437(CH6)	Fig.17	15.08	P
	2462(CH11)	Fig.18	14.72	P

See below for test graphs.

Conclusion: PASS



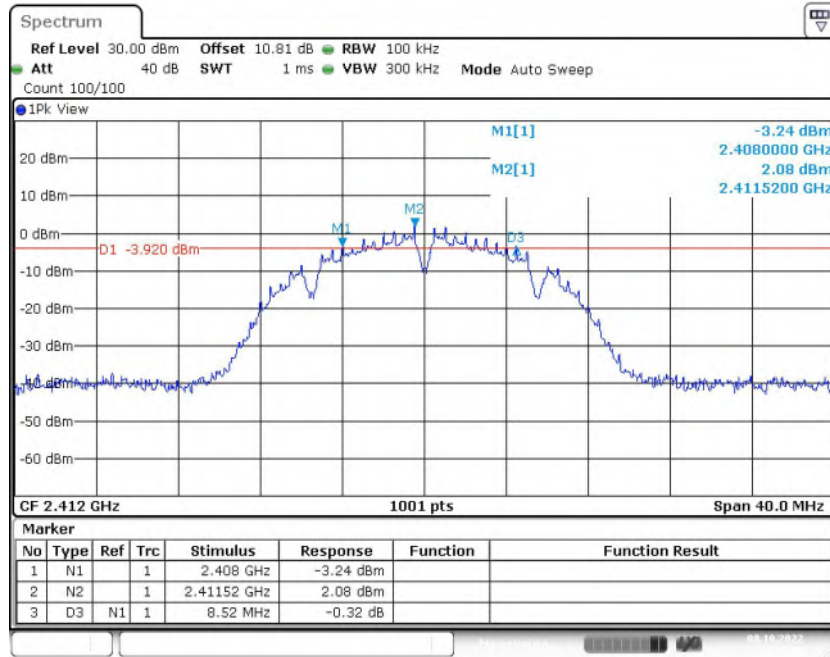


Fig.10 6dB Bandwidth (802.11b, CH1)

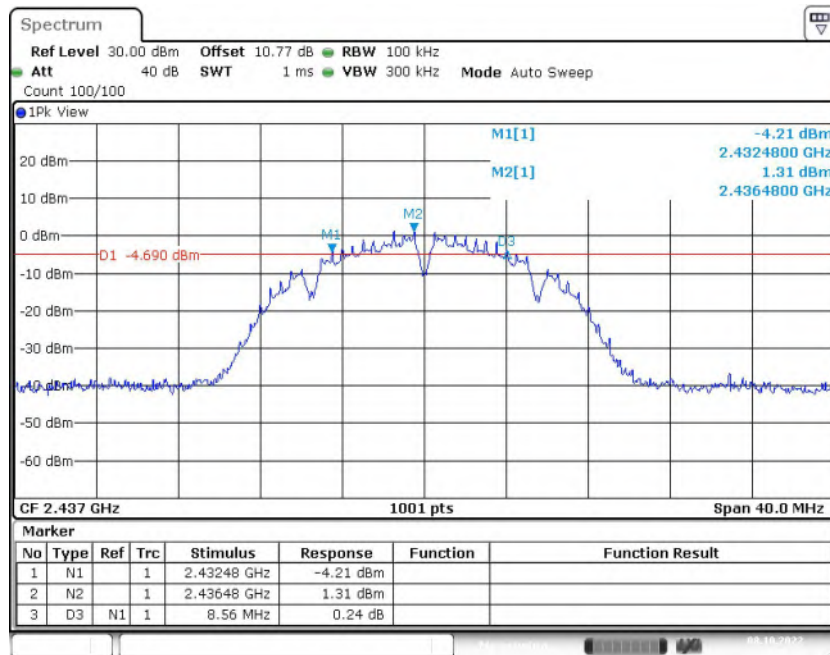


Fig.11 6dB Bandwidth (802.11b, CH6)



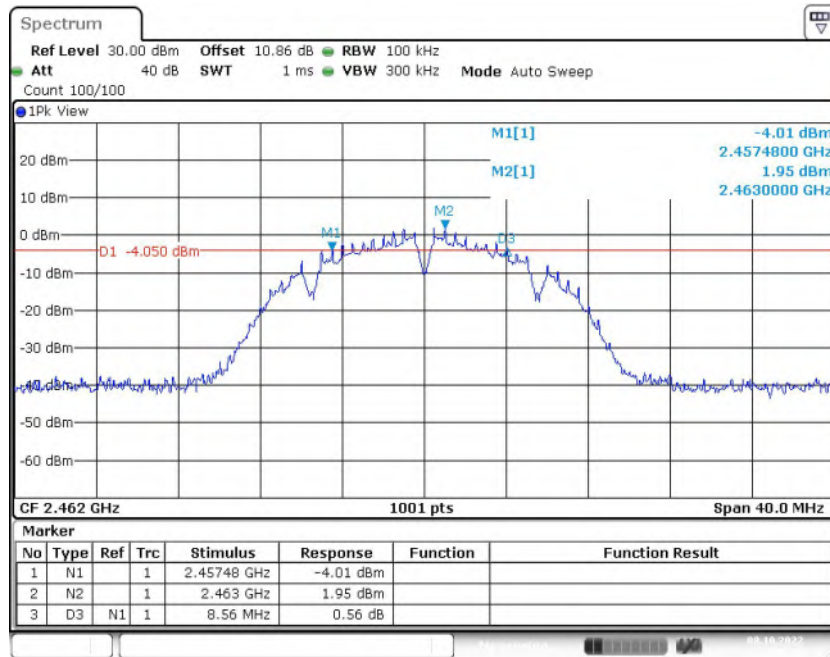


Fig.12 6dB Bandwidth (802.11b, CH11)

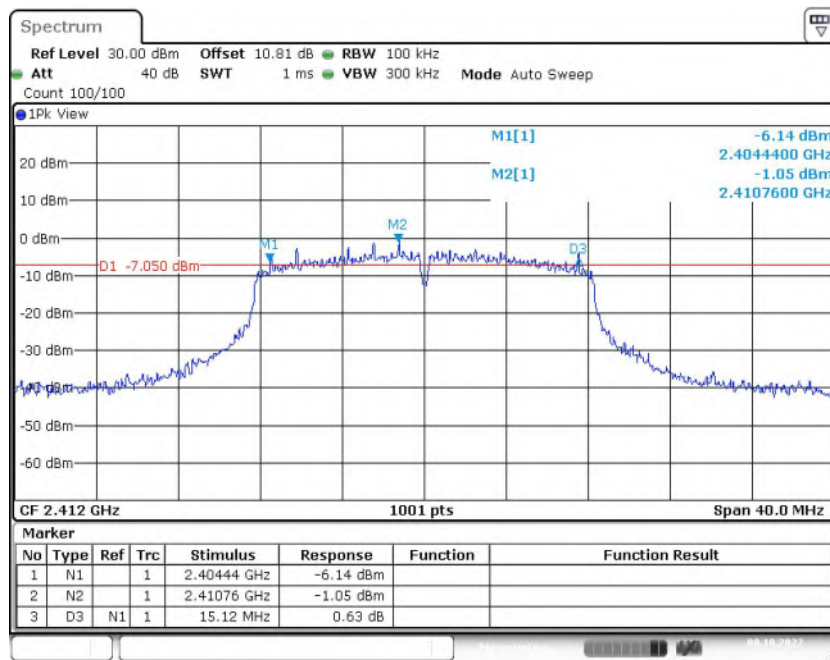


Fig.13 6dB Bandwidth (802.11g, CH1)

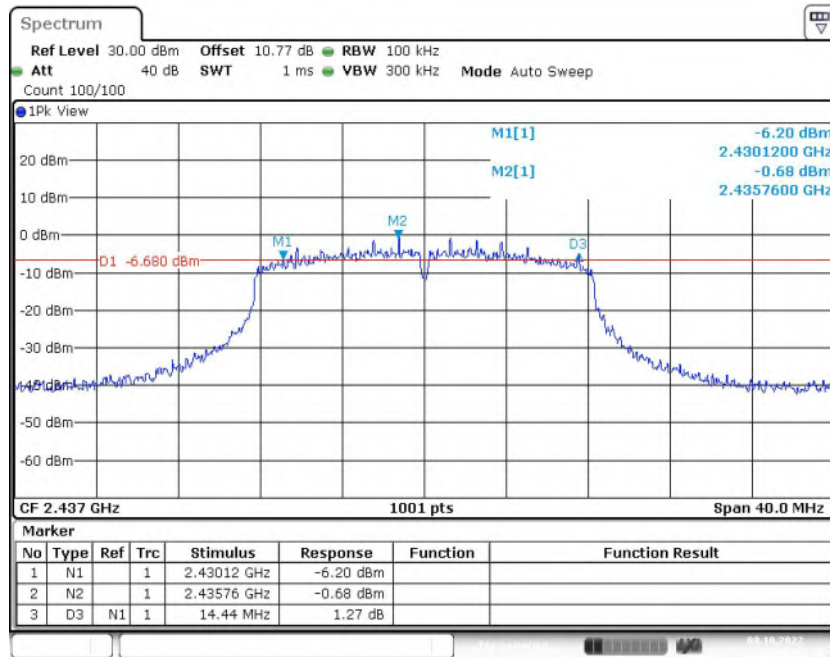


Fig.14 6dB Bandwidth (802.11g, CH6)

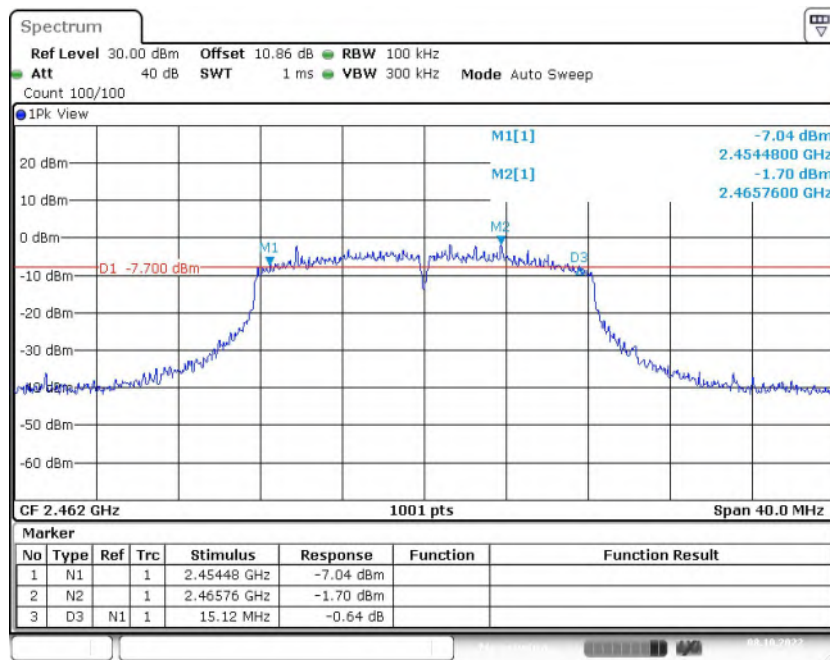


Fig.15 6dB Bandwidth (802.11g, CH11)

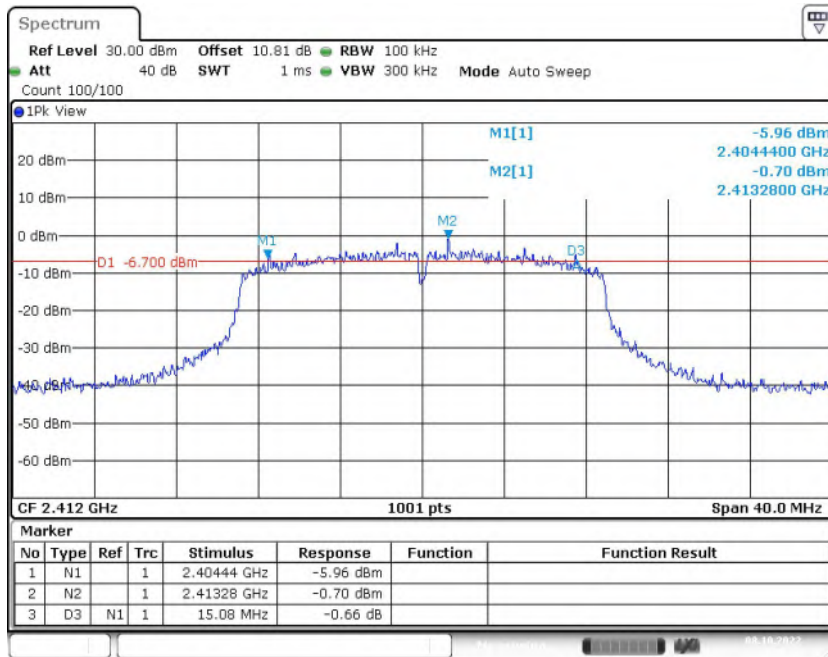


Fig.16 6dB Bandwidth (802.11n-HT20, CH1)

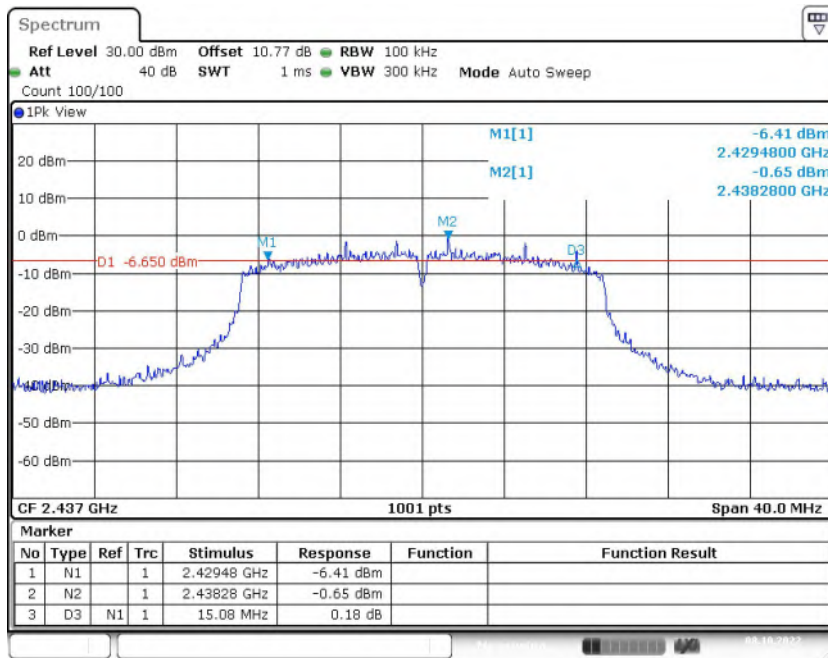


Fig.17 6dB Bandwidth (802.11n-HT20, CH6)

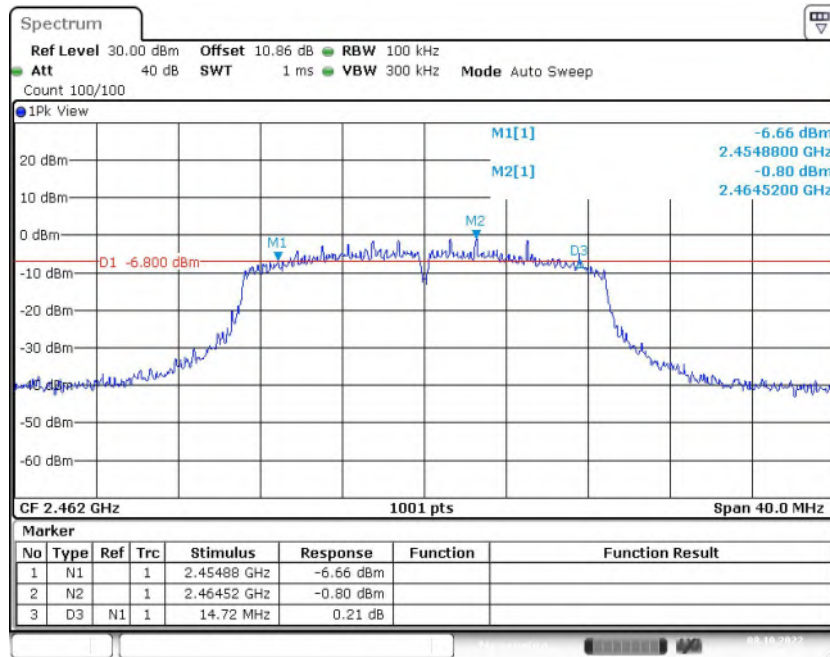


Fig.18 6dB Bandwidth (802.11n-HT20, CH11)



### A.4 Band Edges Compliance

Method of Measurement: See ANSI C63.10-clause 11.13.3.2.

Measurement Limit:

Standard	Limit (dB)
FCC 47 CFR Part 15.247 (d)	> 30

Measurement Result:

Mode	Frequency (MHz)	Test Results (dB)		Conclusion
		Fig.	Value	
802.11b	2412(CH1)	Fig.19	43.03	P
	2462(CH11)	Fig.20	47.44	P
802.11g	2412(CH1)	Fig.21	34.82	P
	2462(CH11)	Fig.22	44.78	P
802.11n-HT20	2412(CH1)	Fig.23	34.01	P
	2462(CH11)	Fig.24	45.10	P

See below for test graphs.

Conclusion: PASS

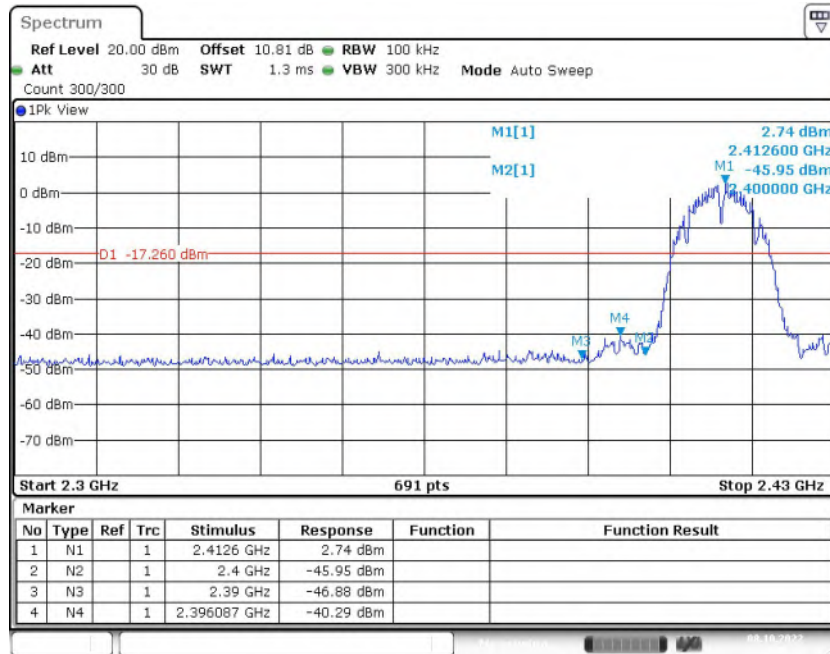


Fig.19 Band Edges (802.11b, CH1)

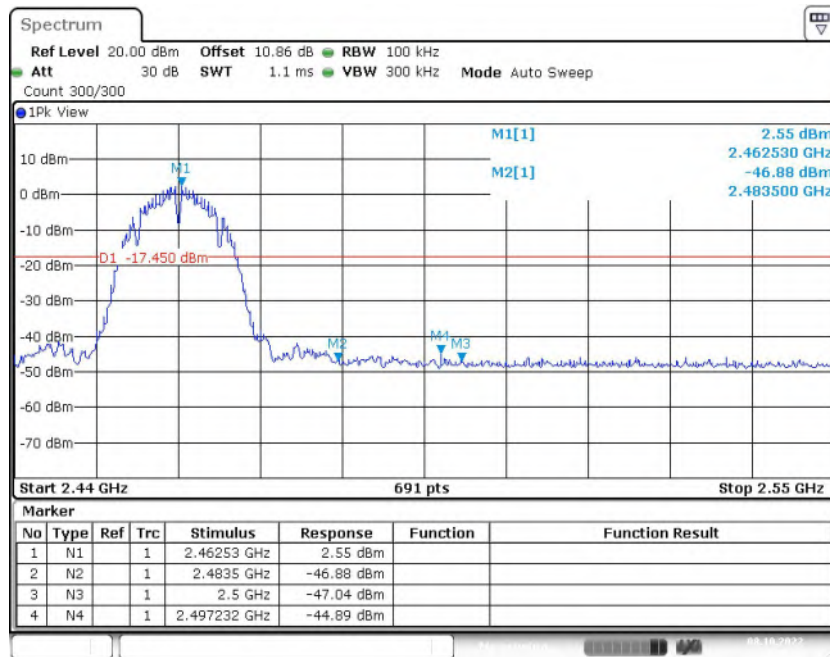


Fig.20 Band Edges (802.11b, CH11)



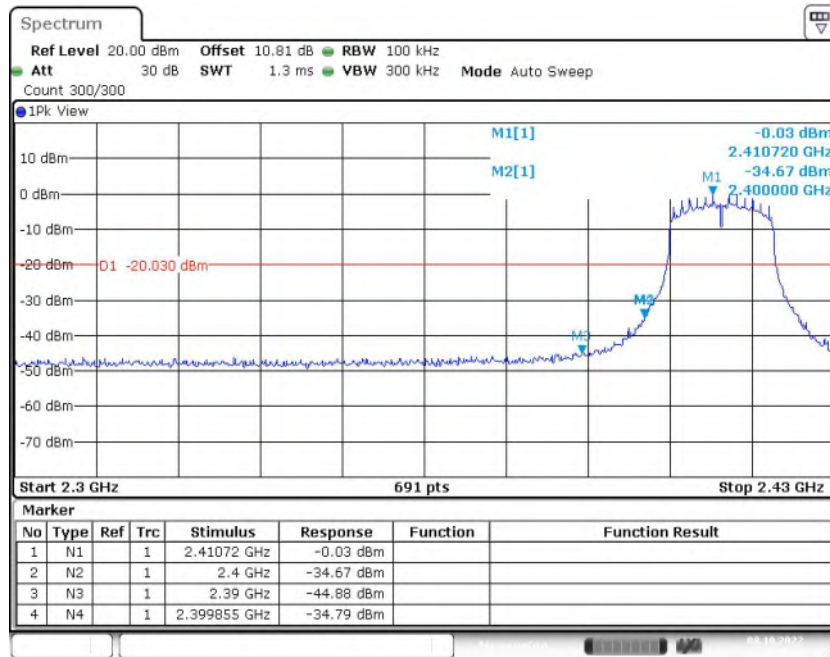


Fig.21 Band Edges (802.11g, CH1)

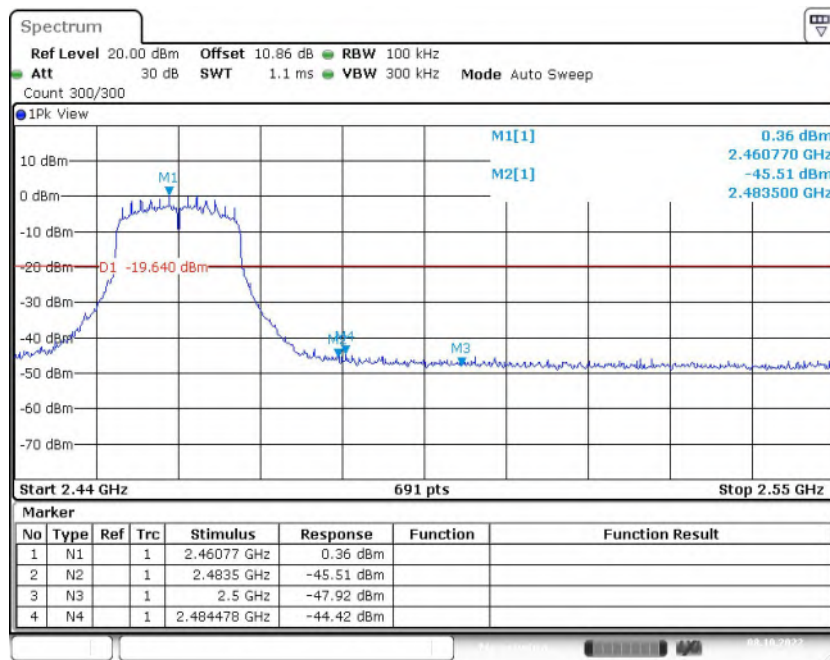


Fig.22 Band Edges (802.11g, CH11)

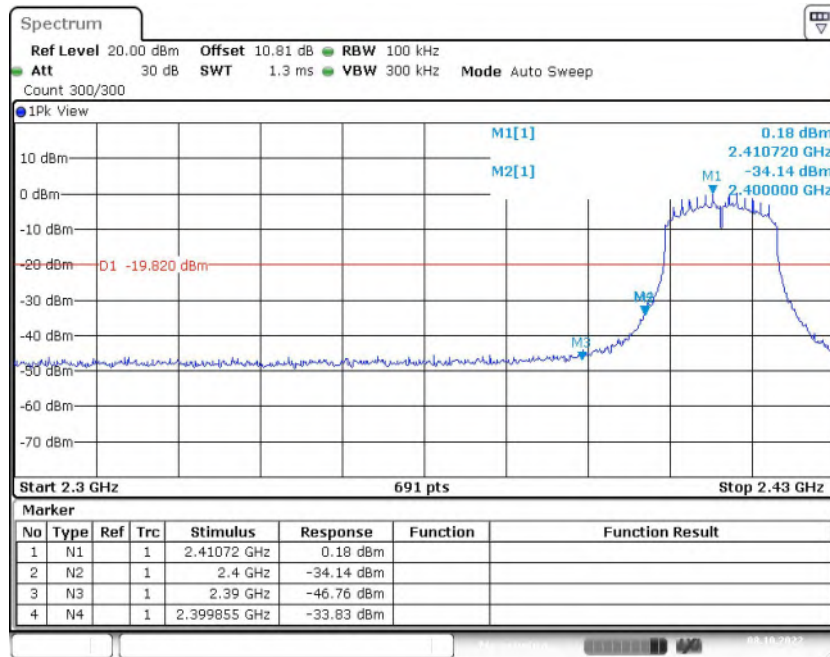


Fig.23 Band Edges (802.11n-HT20, CH1)

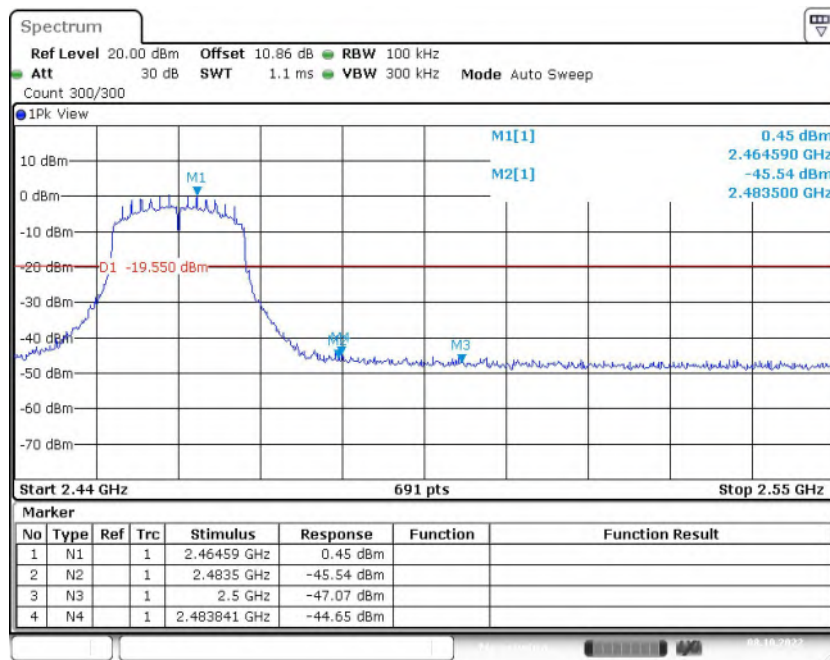


Fig.24 Band Edges (802.11n-HT20, CH11)





**A.5 Conducted Emission**

**Method of Measurement: See ANSI C63.10-clause 11.11.2&11.11.3.**


**Measurement Limit:**

Standard	Limit (dBm)
FCC 47 CFR Part 15.247 (d)	30dBm below peak output power in 100kHz bandwidth


**Measurement Results:**

Mode	Frequency (MHz)	Frequency Range	Test Results	Conclusion
802.11b	2412(CH1)	2.412GHz	Fig.25	P
		30MHz-1GHz	Fig.26	P
		1GHz-26.5GHz	Fig.27	P
	2437(CH6)	2.437GHz	Fig.28	P
		30MHz-1GHz	Fig.29	P
		1GHz-26.5GHz	Fig.30	P
	2462(CH11)	2.462GHz	Fig.31	P
		30MHz-1GHz	Fig.32	P
		1GHz-26.5GHz	Fig.33	P
802.11g	2412(CH1)	2.412GHz	Fig.34	P
		30MHz-1GHz	Fig.35	P
		1GHz-26.5GHz	Fig.36	P
	2437(CH6)	2.437GHz	Fig.37	P
		30MHz-1GHz	Fig.38	P
		1GHz-26.5GHz	Fig.39	P
	2462(CH11)	2.462GHz	Fig.40	P
		30MHz-1GHz	Fig.41	P
		1GHz-26.5GHz	Fig.42	P
802.11n-HT20	2412(CH1)	2.412GHz	Fig.43	P
		30MHz-1GHz	Fig.44	P
		1GHz-26.5GHz	Fig.45	P
	2437(CH6)	2.437GHz	Fig.46	P
		30MHz-1GHz	Fig.47	P
		1GHz-26.5GHz	Fig.48	P
	2462(CH11)	2.462GHz	Fig.49	P
		30MHz-1GHz	Fig.50	P
		1GHz-26.5GHz	Fig.51	P

See below for test graphs.  
**Conclusion: PASS**

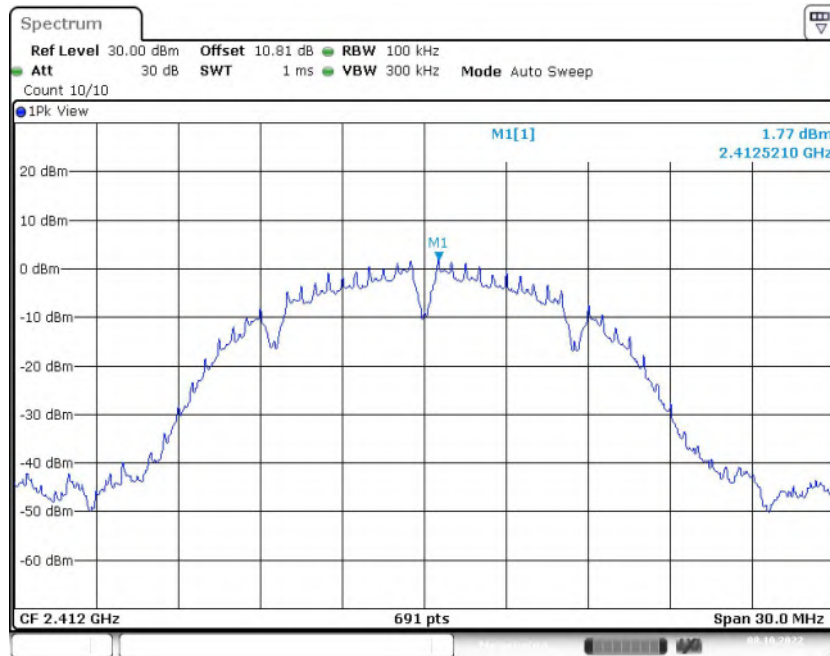

**Fig.25 Conducted Spurious Emission (Center Frequency, 802.11b, CH1)**

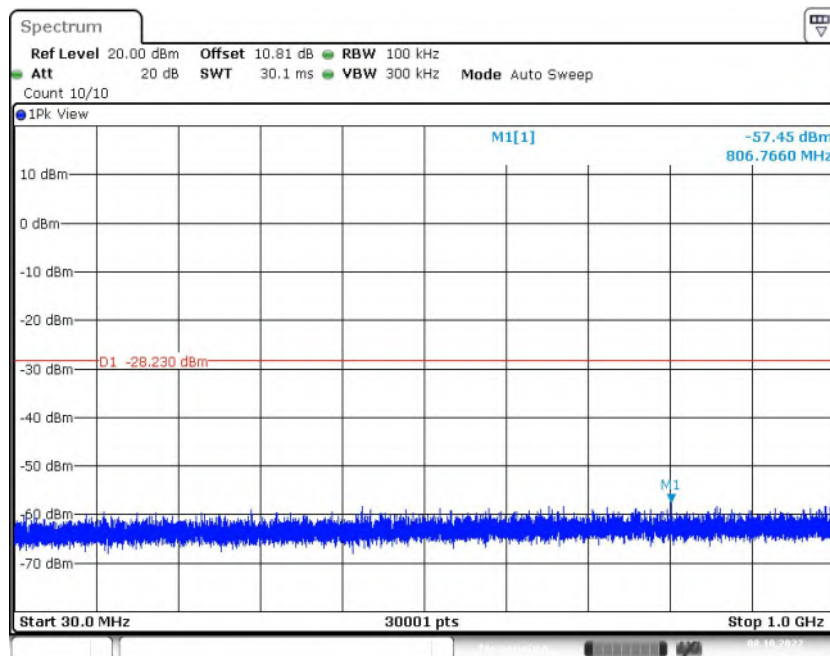

**Fig.26 Conducted Spurious Emission (30MHz-1GHz, 802.11b, CH1)**

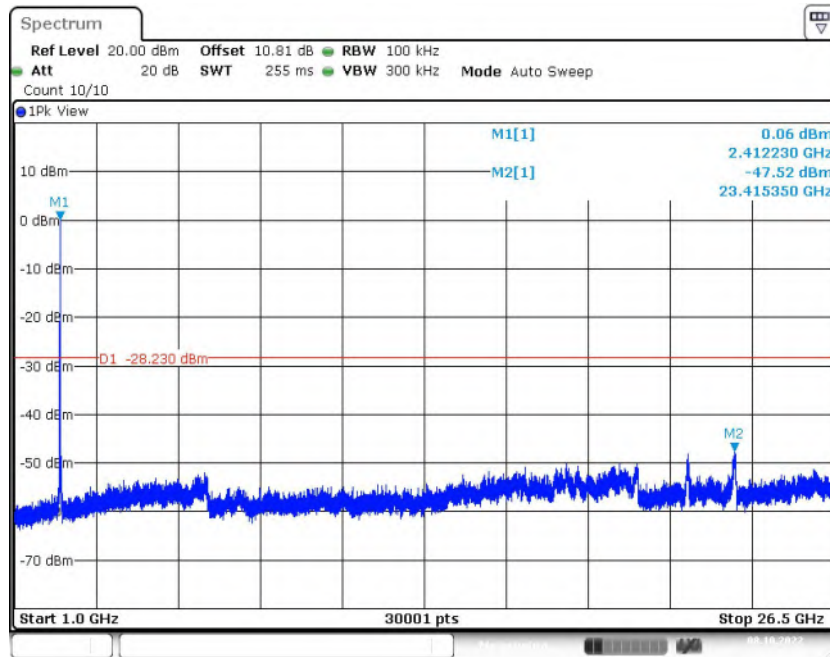


Fig.27 Conducted Spurious Emission (1GHz-26.5GHz, 802.11b, CH1)

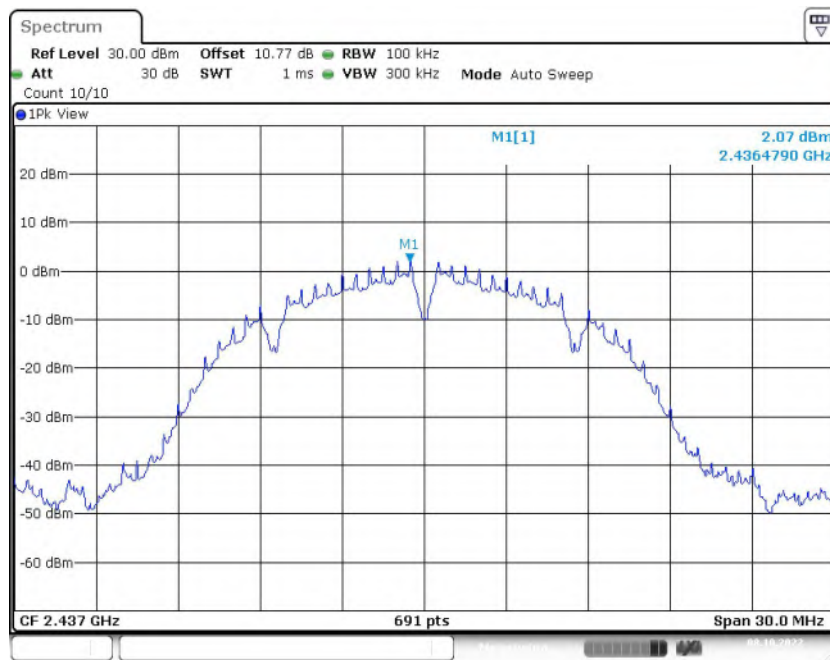


Fig.28 Conducted Spurious Emission (Center Frequency, 802.11b, CH6)

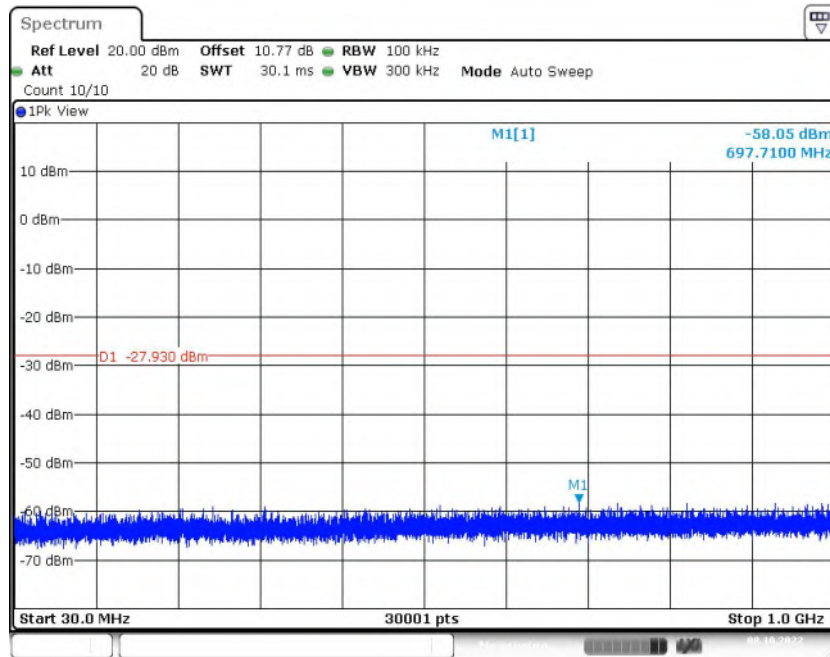


Fig.29 Conducted Spurious Emission (30MHz-1GHz, 802.11b, CH6)

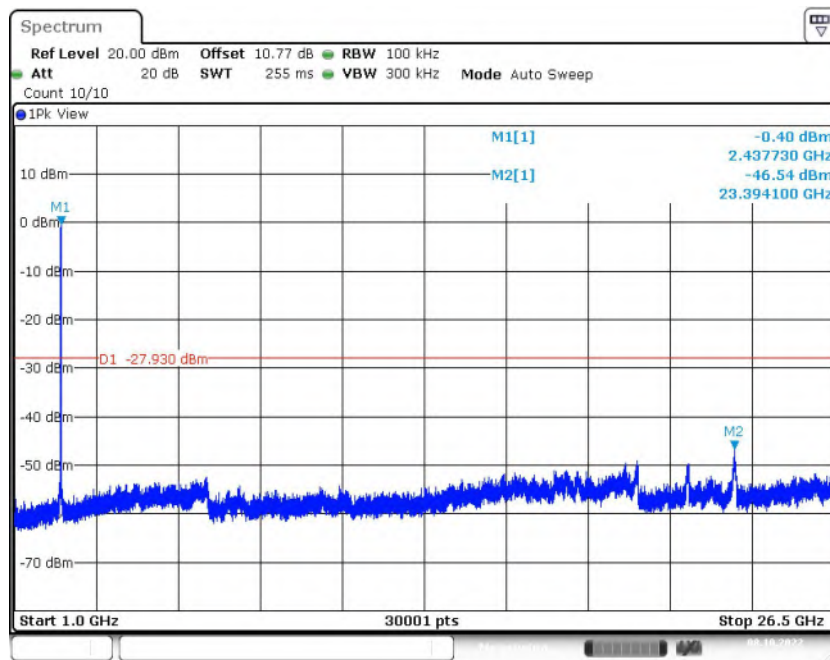


Fig.30 Conducted Spurious Emission (1GHz-26.5GHz, 802.11b, CH6)

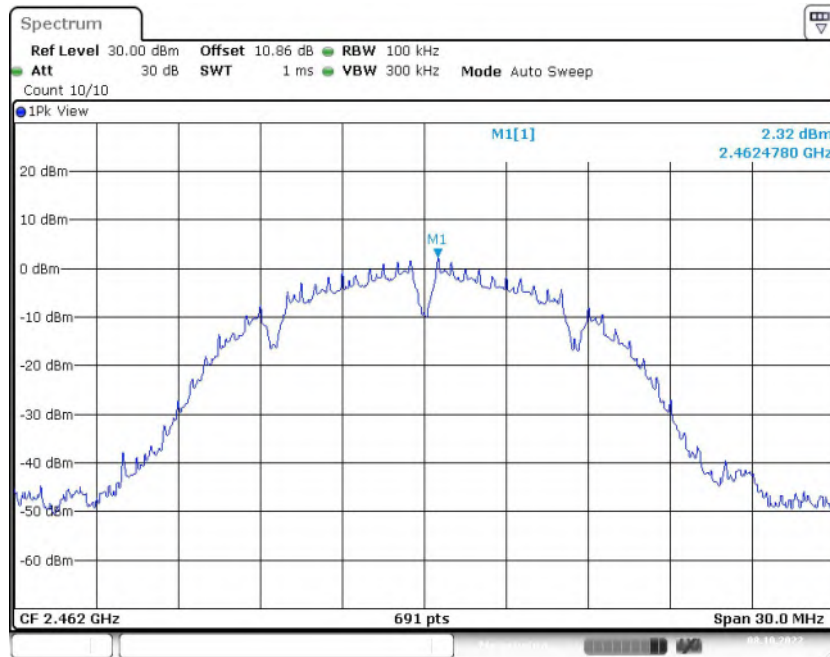


Fig.31 Conducted Spurious Emission (Center Frequency, 802.11b, CH11)

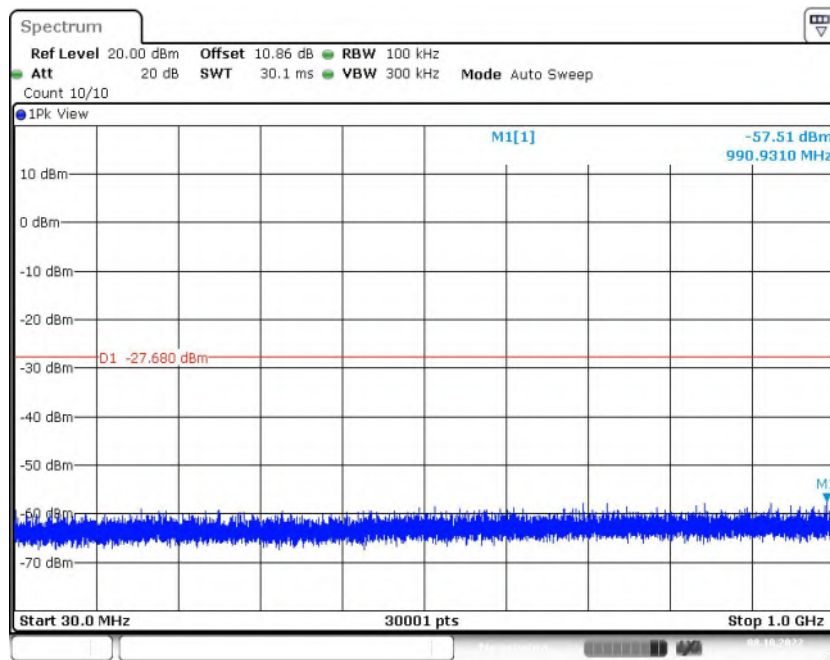


Fig.32 Conducted Spurious Emission (30MHz-1GHz, 802.11b, CH11)

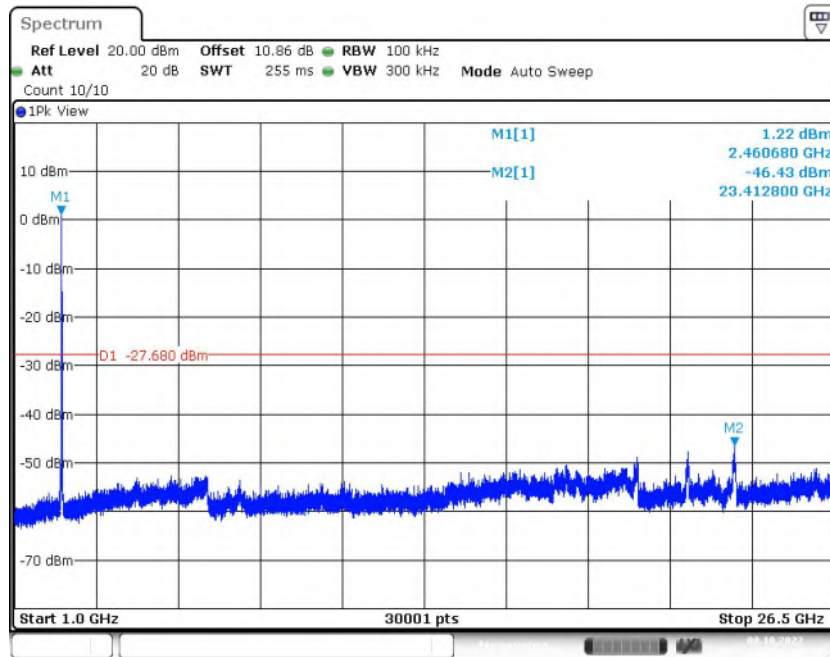


Fig.33 Conducted Spurious Emission (1GHz-26.5GHz, 802.11b, CH11)

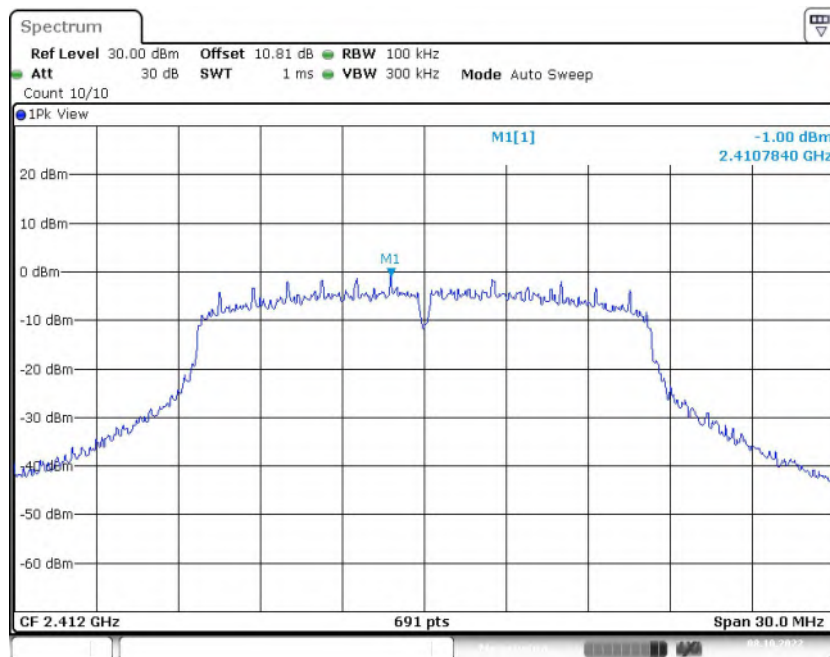


Fig.34 Conducted Spurious Emission (Center Frequency, 802.11g, CH1)



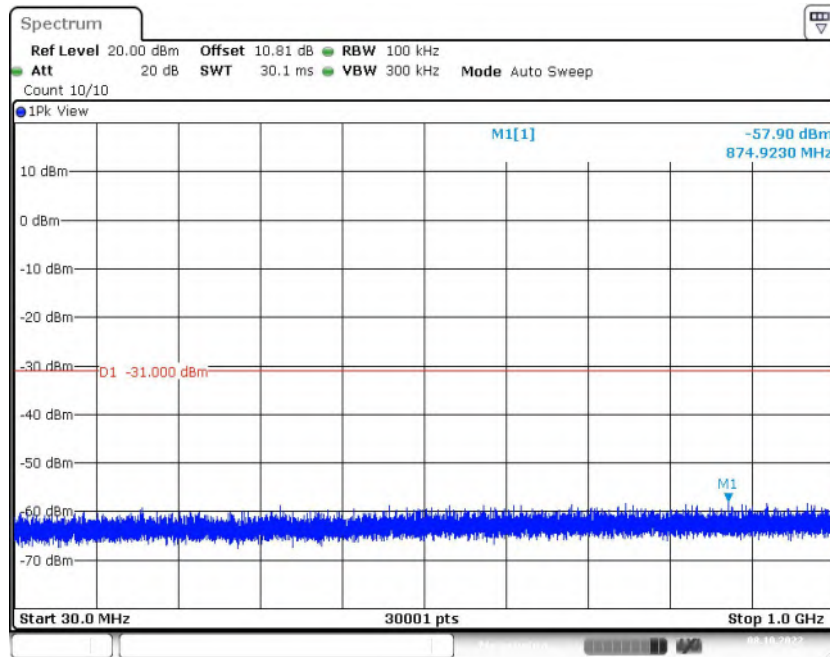


Fig.35 Conducted Spurious Emission (30MHz-1GHz, 802.11g, CH1)

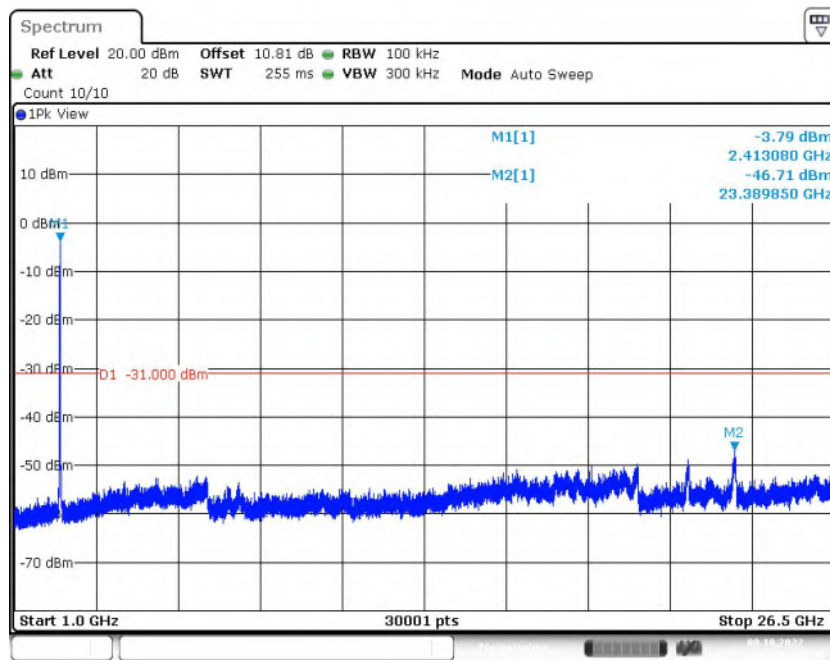


Fig.36 Conducted Spurious Emission (1GHz-26.5GHz, 802.11g, CH1)

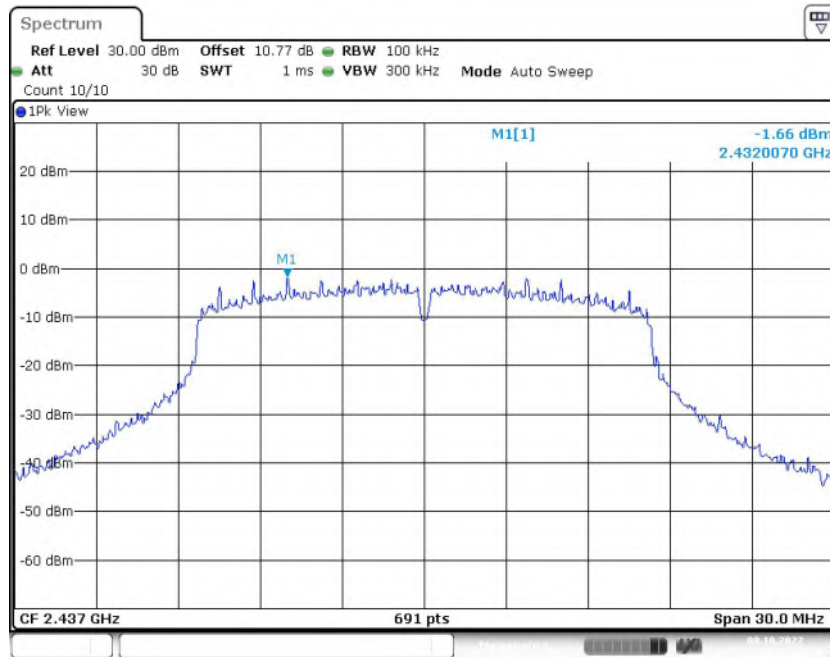


Fig.37 Conducted Spurious Emission (Center Frequency, 802.11g, CH6)

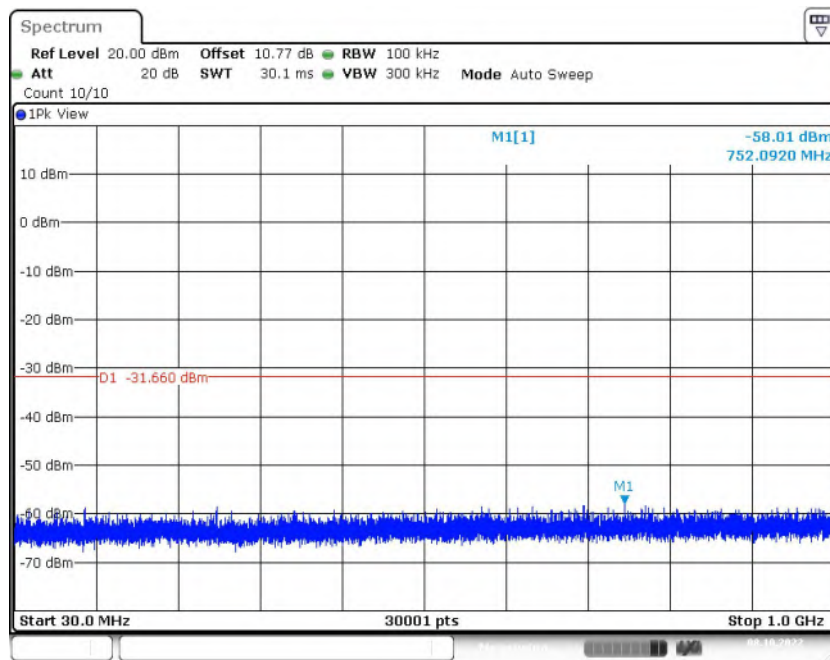


Fig.38 Conducted Spurious Emission (30MHz-1GHz, 802.11g, CH6)



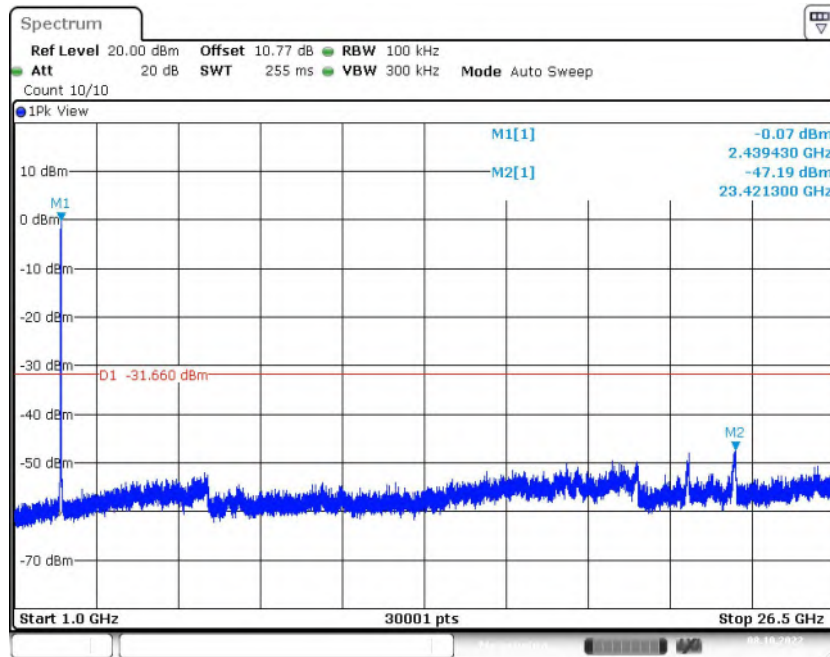


Fig.39 Conducted Spurious Emission (1GHz-26.5GHz, 802.11g, CH6)

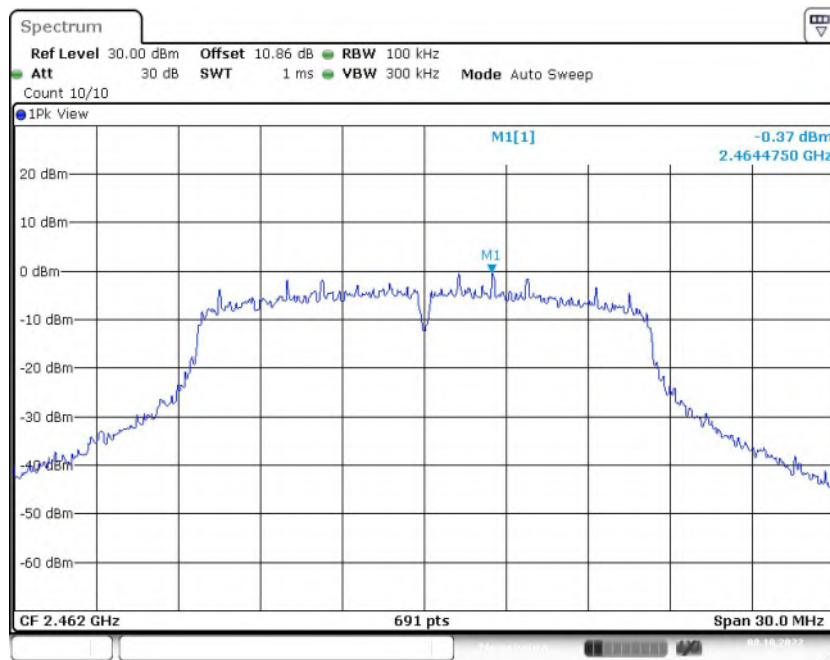


Fig.40 Conducted Spurious Emission (Center Frequency, 802.11g, CH11)

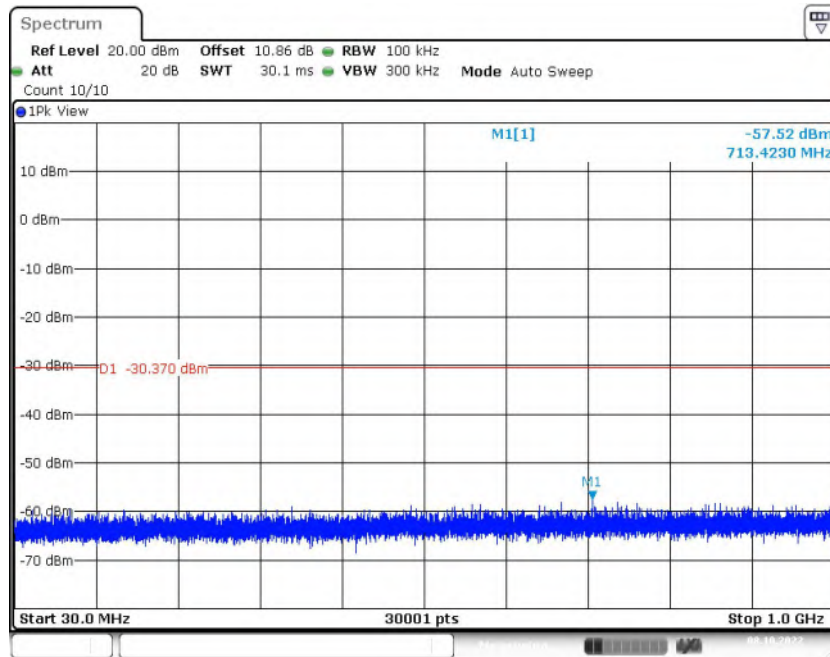


Fig.41 Conducted Spurious Emission (30MHz-1GHz, 802.11g, CH11)

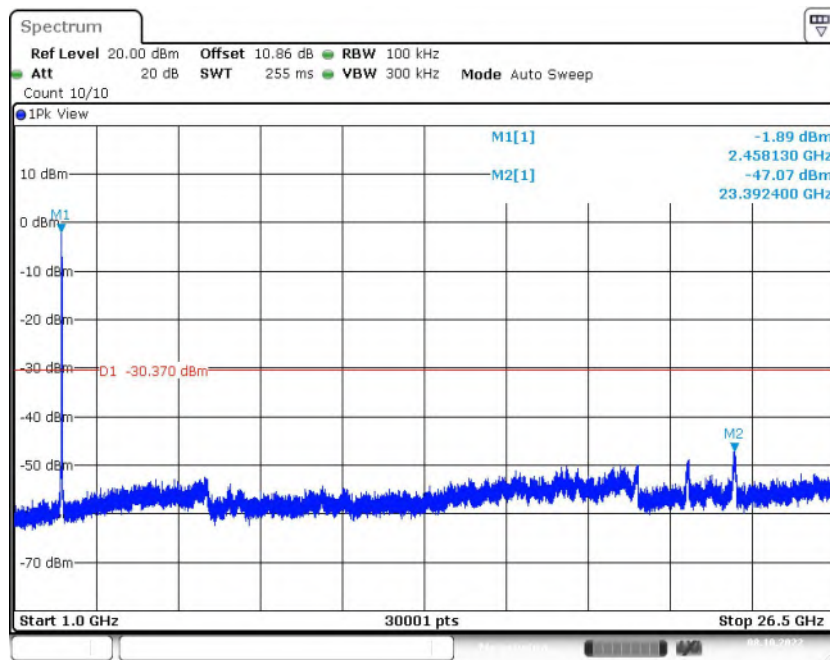


Fig.42 Conducted Spurious Emission (1GHz-26.5GHz, 802.11g, CH11)

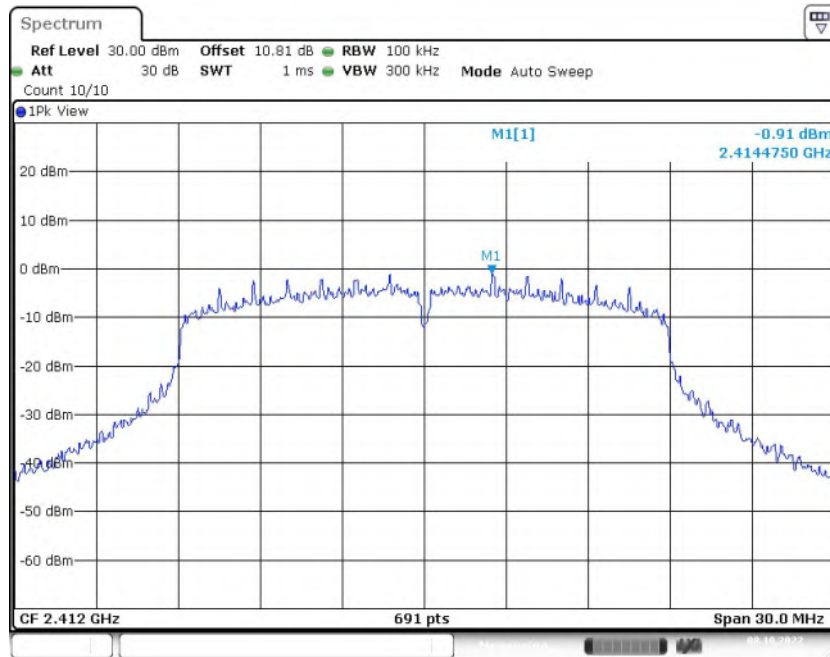


Fig.43 Conducted Spurious Emission (Center Frequency, 802.11n-HT20, CH1)

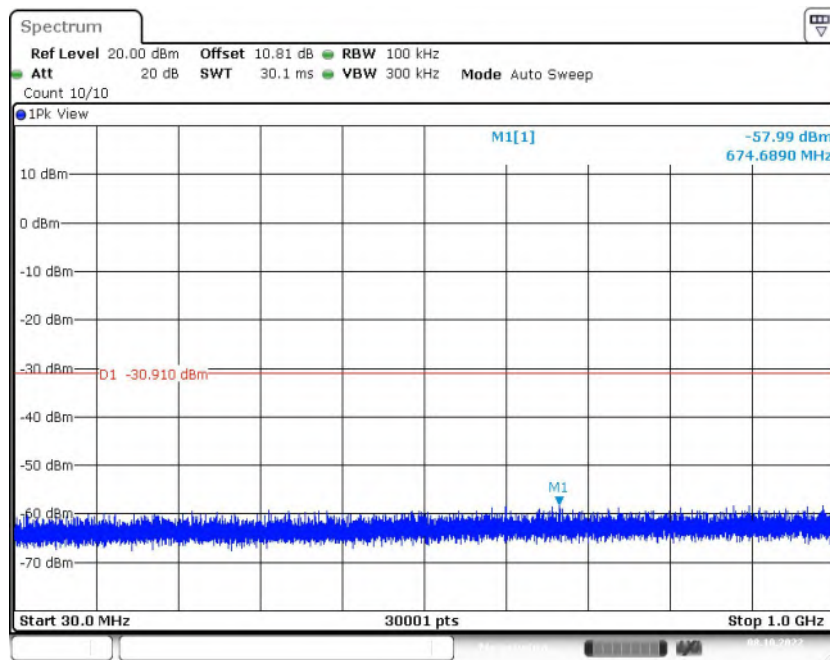


Fig.44 Conducted Spurious Emission (30MHz-1GHz, 802.11n-HT20, CH1)

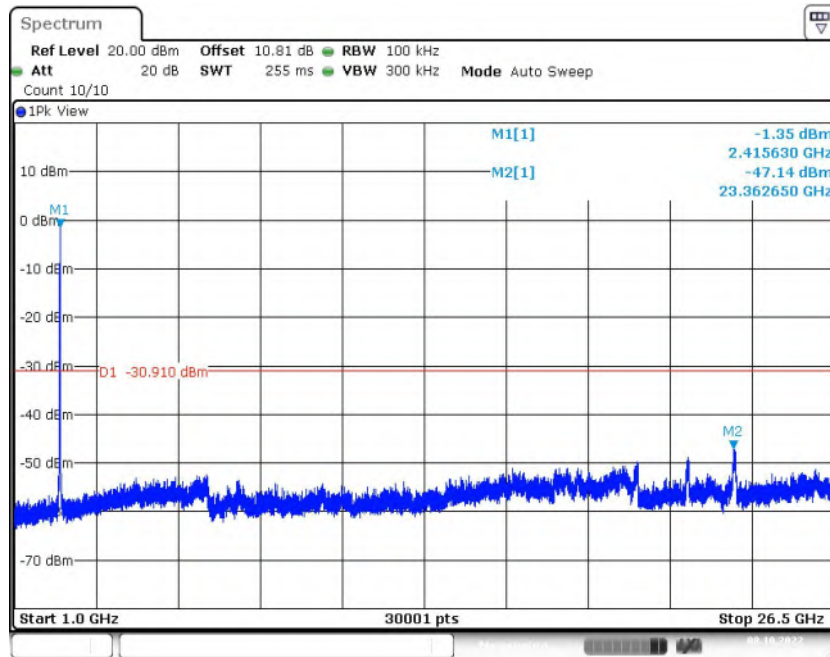


Fig.45 Conducted Spurious Emission (1GHz-26.5GHz, 802.11n-HT20, CH1)

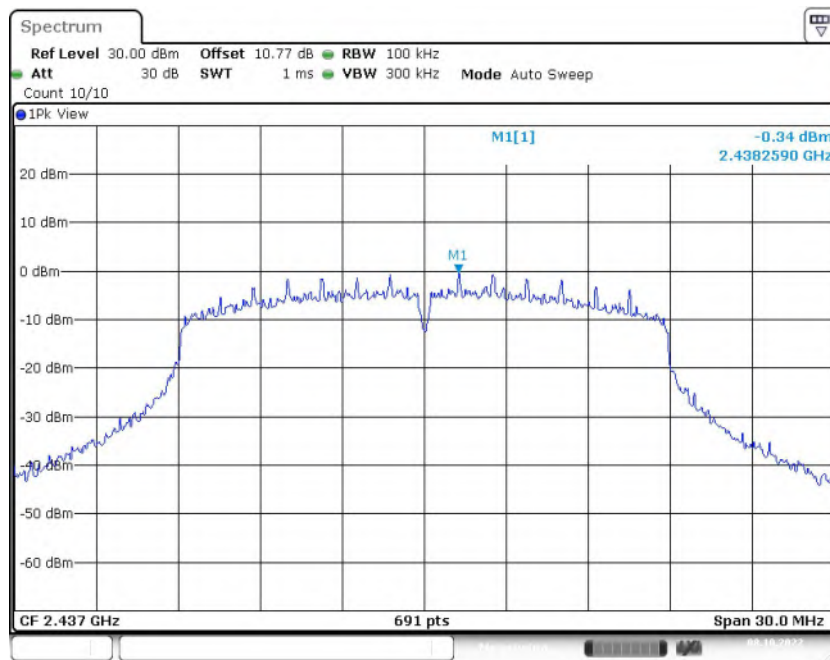


Fig.46 Conducted Spurious Emission (Center Frequency, 802.11n-HT20, CH6)

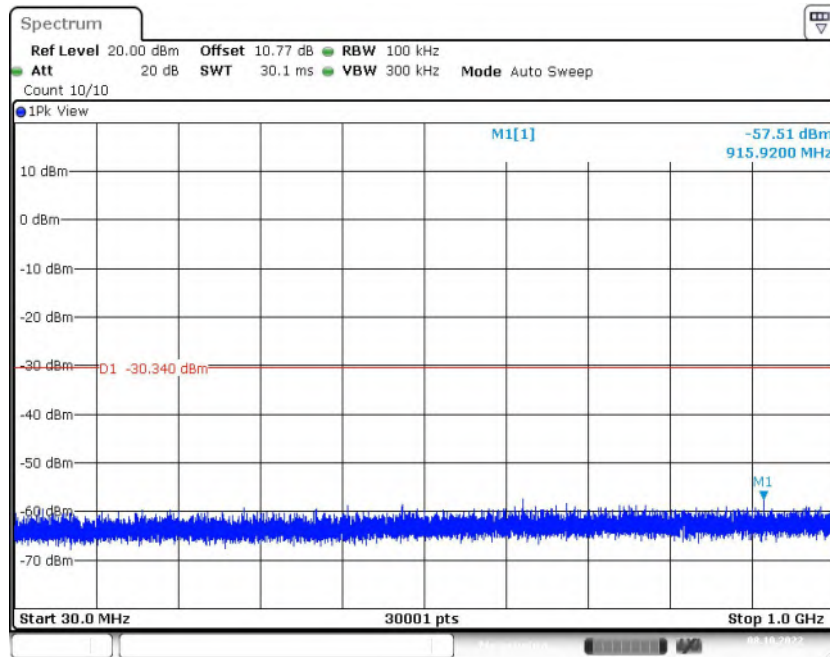


Fig.47 Conducted Spurious Emission (30MHz-1GHz, 802.11n-HT20, CH6)

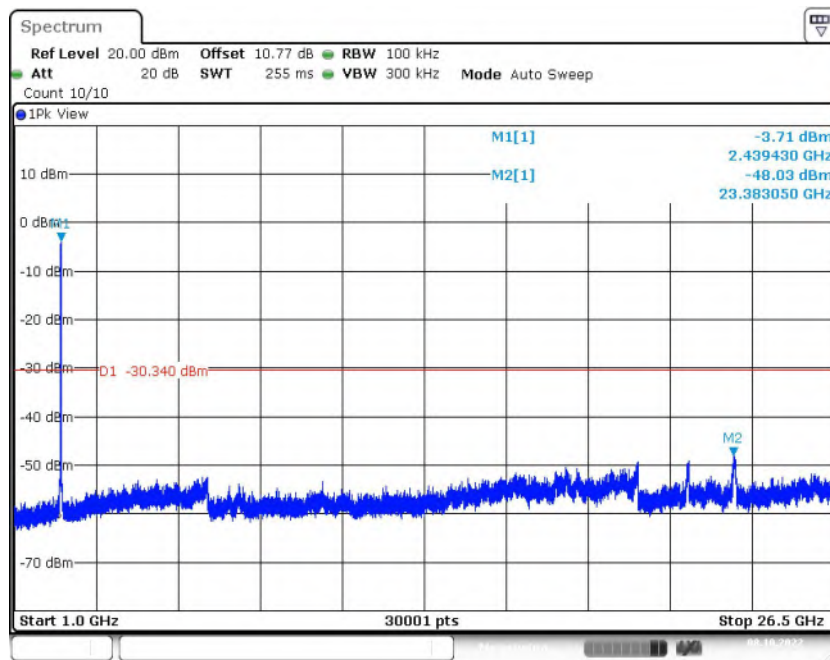


Fig.48 Conducted Spurious Emission (1GHz-26.5GHz, 802.11n-HT20, CH6)



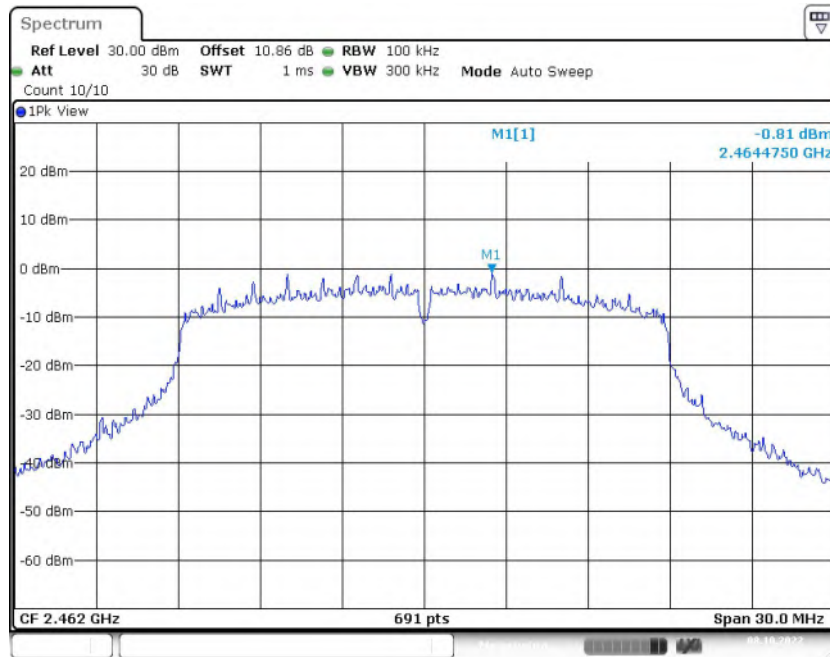


Fig.49 Conducted Spurious Emission (Center Frequency, 802.11n-HT20, CH11)

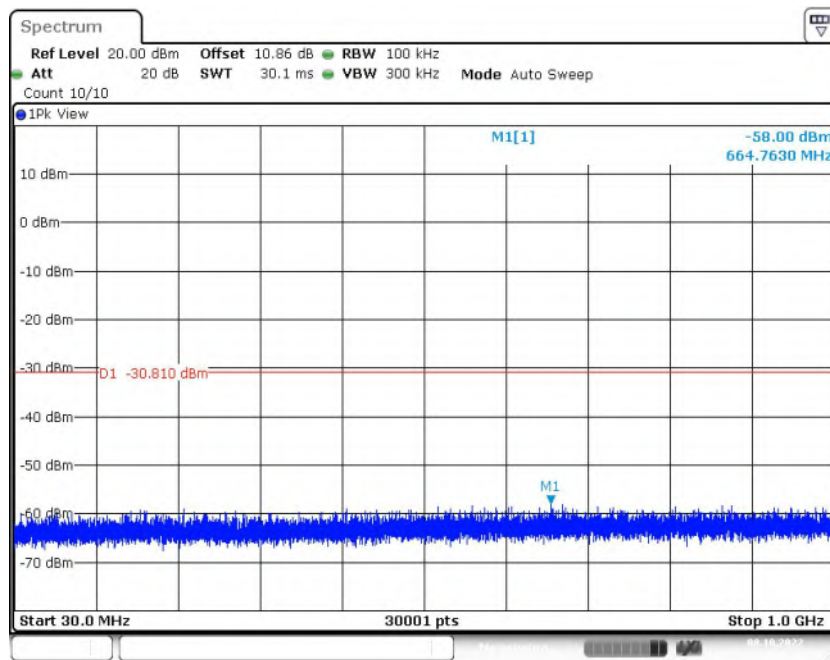


Fig.50 Conducted Spurious Emission (30MHz-1GHz, 802.11n-HT20, CH11)

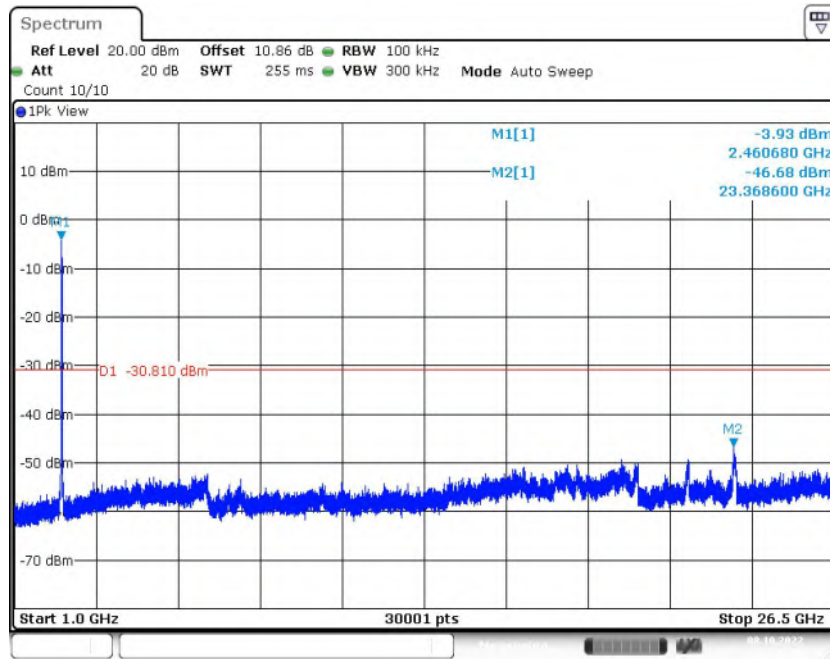


Fig.51 Conducted Spurious Emission (1GHz-26.5GHz, 802.11n-HT20, CH11)

**A.6 Radiated Emission****Method of Measurement: See ANSI C63.10-clause 11.11&11.12.****Measurement Limit:**

Standard	Limit (dBm)
FCC 47 CFR Part 15.247, 15.205, 15.209	20dBm below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

**Limit in restricted band:**

Frequency of emission (MHz)	Field strength( $\mu$ V/m)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**Test Condition:**

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	120kHz/300kHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

**Note:**

According to the performance evaluation, the radiated emission margin of EUT is over 20dB in the band below 30MHz. Therefore, the measurement starts from 30MHz to tenth harmonic.

The measurement results include the horizontal polarization and vertical polarization measurements.





**Measurement Results:**

Mode	Frequency (MHz)	Frequency Range	Test Results	Conclusion
802.11b	2412(CH1)	1 GHz ~18 GHz	Fig.52	<b>P</b>
	2437(CH6)	1 GHz ~18 GHz	Fig.53	<b>P</b>
	2462(CH11)	1 GHz ~18 GHz	Fig.54	<b>P</b>
	Restricted Band (CH1)	2.38 GHz ~ 2.45 GHz	Fig.55	<b>P</b>
	Restricted Band (CH11)	2.45 GHz ~ 2.5 GHz	Fig.56	<b>P</b>
802.11g	2412(CH1)	1 GHz ~18 GHz	Fig.57	<b>P</b>
	2437(CH6)	1 GHz ~18 GHz	Fig.58	<b>P</b>
	2462(CH11)	1 GHz ~18 GHz	Fig.59	<b>P</b>
	Restricted Band (CH1)	2.38 GHz ~ 2.45 GHz	Fig.60	<b>P</b>
	Restricted Band (CH11)	2.45 GHz ~ 2.5 GHz	Fig.61	<b>P</b>
802.11n- HT20	2412(CH1)	1 GHz ~18 GHz	Fig.62	<b>P</b>
	2437(CH6)	1 GHz ~18 GHz	Fig.63	<b>P</b>
	2462(CH11)	1 GHz ~18 GHz	Fig.64	<b>P</b>
	Restricted Band (CH1)	2.38 GHz ~ 2.45 GHz	Fig.65	<b>P</b>
	Restricted Band (CH11)	2.45 GHz ~ 2.5 GHz	Fig.66	<b>P</b>
/	All Channels	9 kHz ~30 MHz	Fig.67	<b>P</b>
		30 MHz ~1 GHz	Fig.68	<b>P</b>
		18 GHz ~26.5 GHz	Fig.69	<b>P</b>

**Worst-Case Result:**

**802.11b CH6 (1-18GHz)**

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
13368.857143	47.00	74.00	27.00	V	11.4
14227.714286	46.82	74.00	27.18	H	11.2
14894.142857	49.13	74.00	24.87	V	13.0
16584.857143	52.66	74.00	21.34	V	16.8
17109.428571	54.24	74.00	19.76	V	18.4
17927.571429	54.72	74.00	19.28	H	18.9

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
13368.857143	38.12	54.00	15.88	V	11.4
14227.714286	38.17	54.00	15.83	H	11.2
14894.142857	40.69	54.00	13.31	V	13.0
16584.857143	43.77	54.00	10.23	V	16.8
17109.428571	44.24	54.00	9.76	V	18.4
17927.571429	44.45	54.00	9.55	H	18.9



**802.11g CH11 (1GHz-18GHz)**

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
9529.285714	45.90	74.00	28.10	V	7.1
10408.714286	47.39	74.00	26.61	H	9.1
11442.000000	46.89	74.00	27.11	V	10.1
12880.714286	48.62	74.00	25.38	V	11.0
14857.285714	49.58	74.00	24.42	V	13.0
16920.428571	54.07	74.00	19.93	H	18.1

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
9529.285714	36.55	54.00	17.45	V	7.1
10408.714286	36.92	54.00	17.08	H	9.1
11442.000000	36.54	54.00	17.46	V	10.1
12880.714286	38.53	54.00	15.47	V	11.0
14857.285714	40.33	54.00	13.67	V	13.0
16920.428571	44.22	54.00	9.78	H	18.1

**802.11n-HT CH11 (1GHz-18GHz)**

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
4524.900000	46.30	74.00	27.70	V	4.0
5827.200000	48.07	74.00	25.93	H	4.7
10389.000000	47.60	74.00	26.40	H	9.0
12841.285714	49.45	74.00	24.55	H	11.1
15921.000000	51.92	74.00	22.08	H	14.1
16882.285714	53.95	74.00	20.05	H	18.0

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
4524.900000	35.10	54.00	19.90	V	4.0
5827.200000	36.36	54.00	18.64	H	4.7
10389.000000	35.99	54.00	19.01	H	9.0
12841.285714	37.24	54.00	17.76	H	11.1
15921.000000	40.66	54.00	14.34	H	14.1
16882.285714	42.90	54.00	12.10	H	18.0


**Note:**

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and Antenna Factor, the gain of the preamplifier, the cable loss.  $P_{Mea}$  is the field strength recorded from the instrument. The measurement results are obtained as described below:


Result=  $P_{Mea}$  +Cable Loss +Antenna Factor-Gain of the preamplifier.

**See below for test graphs.**


**Conclusion: PASS**

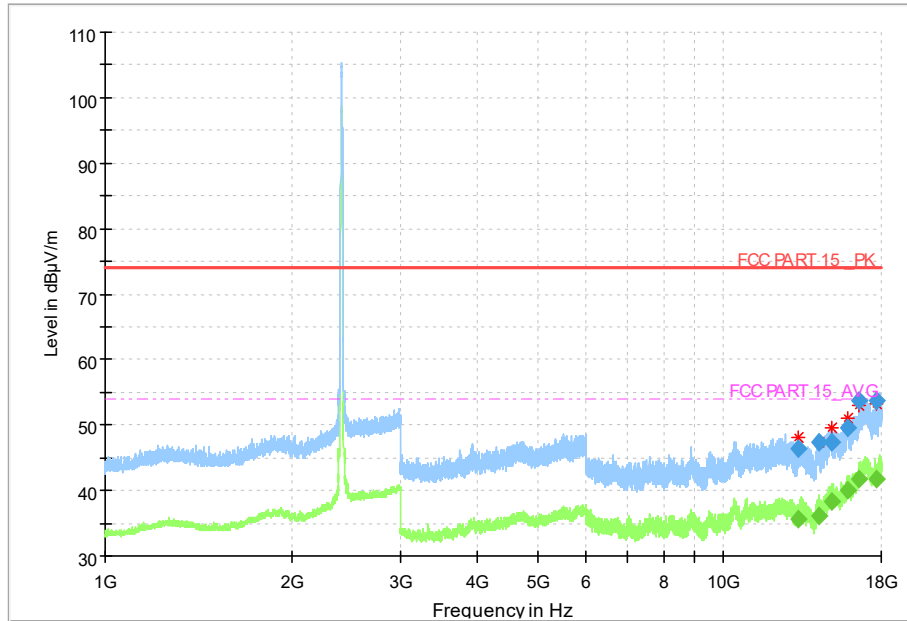


**Fig.52 Radiated Spurious Emission (802.11b, CH1, 1GHz-18GHz)**

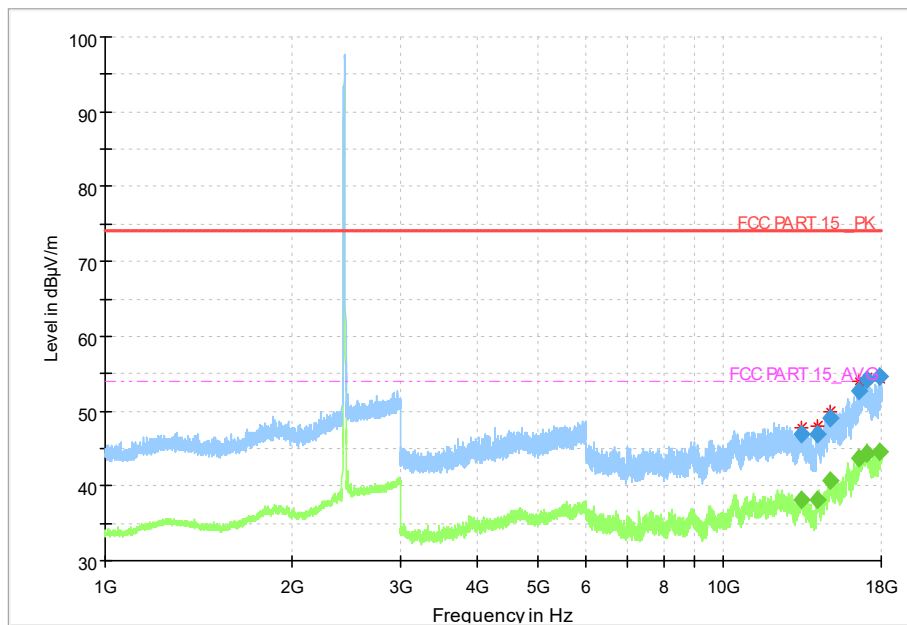


**Fig.53 Radiated Spurious Emission (802.11b, CH6, 1GHz-18GHz)**

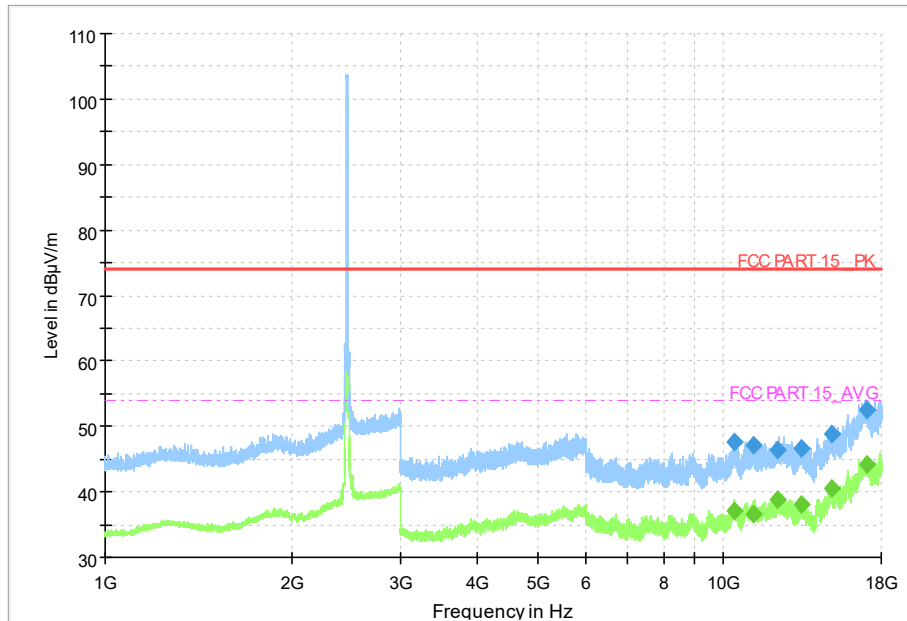


**Fig.54 Radiated Spurious Emission (802.11b, CH11, 1GHz-18GHz)**

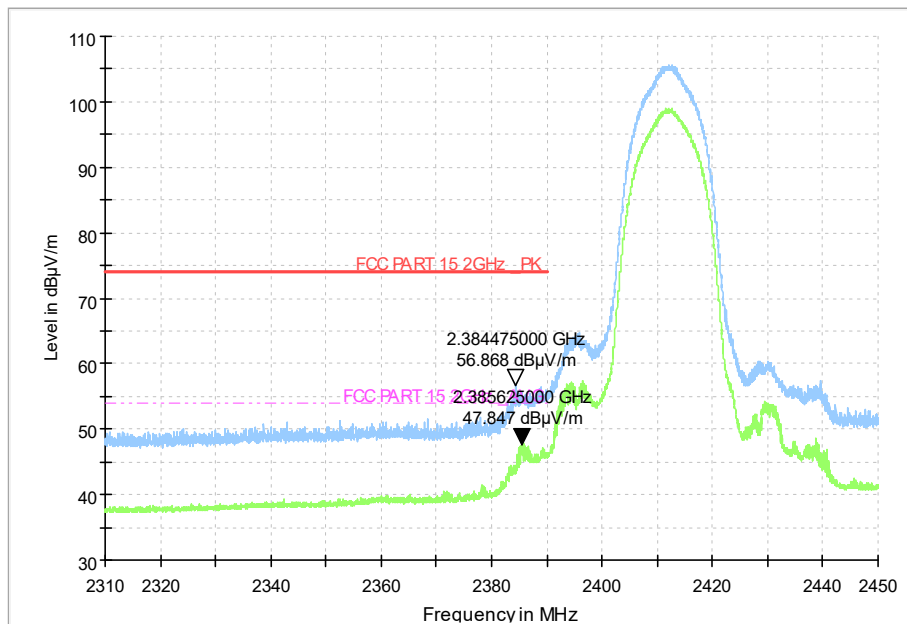


**Fig.55 Radiated Restricted Band (802.11b, CH1, 2.38GHz~2.45GHz)**

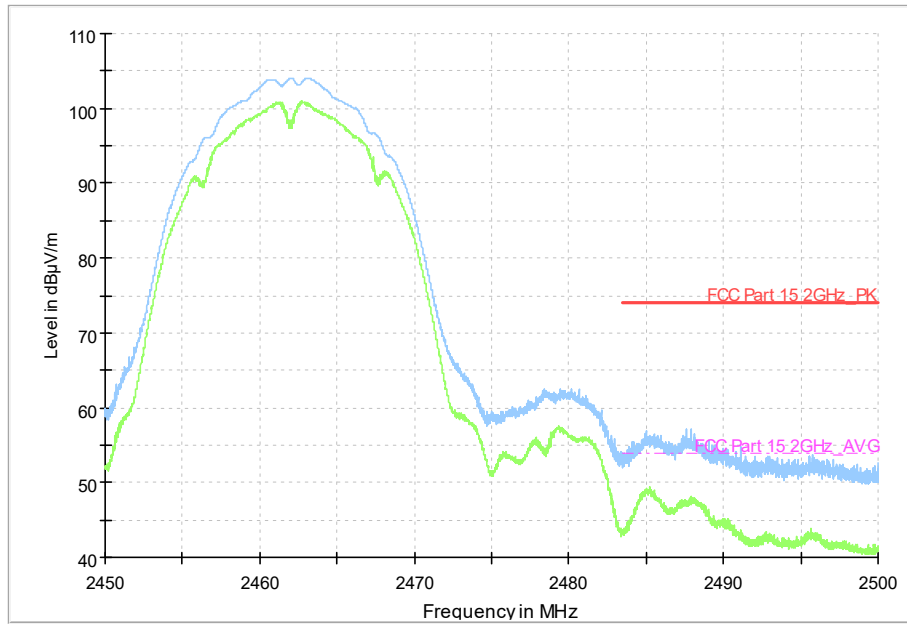


**Fig.56 Radiated Restricted Band (802.11b, CH11, 2.45GHz~2.50GHz)**

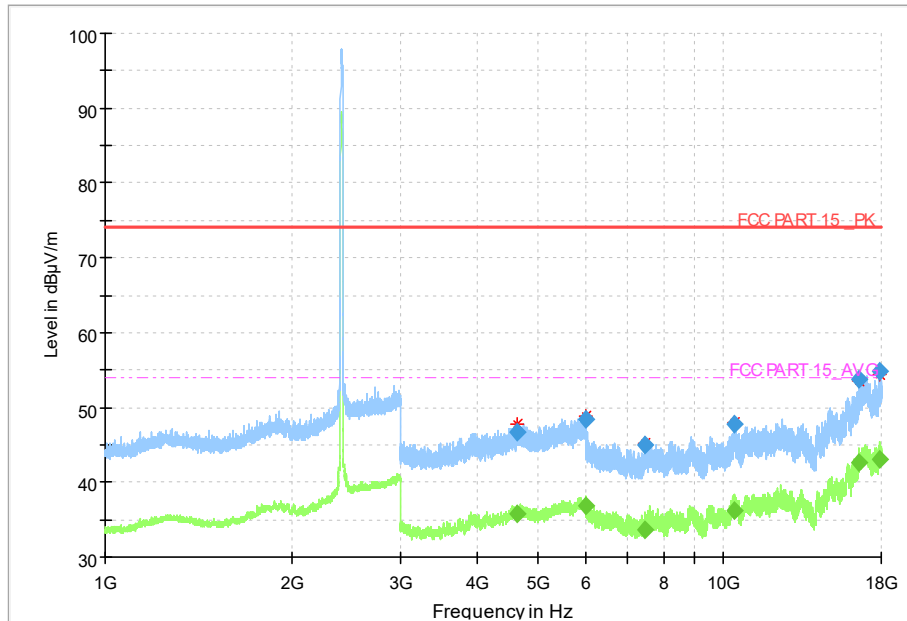


**Fig.57 Radiated Spurious Emission (802.11g, CH1, 1GHz-18GHz)**

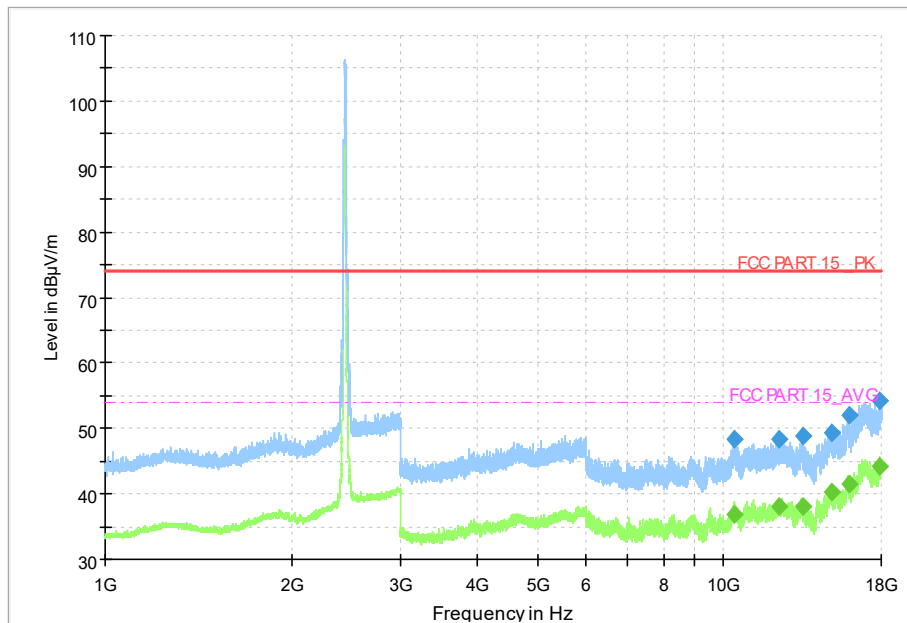


**Fig.58 Radiated Spurious Emission (802.11g, CH6, 1GHz-18GHz)**

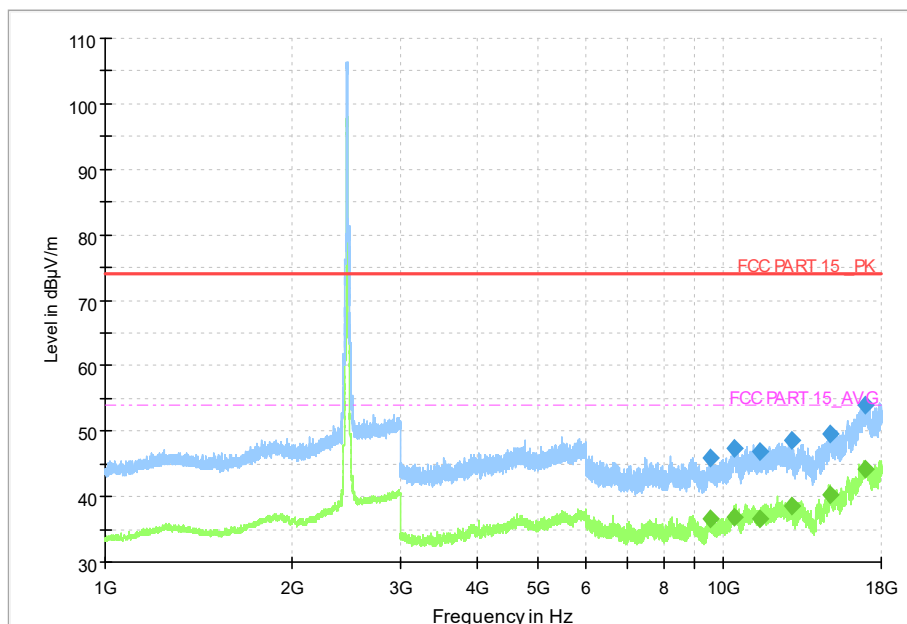


**Fig.59 Radiated Spurious Emission (802.11g, CH11, 1GHz-18GHz)**

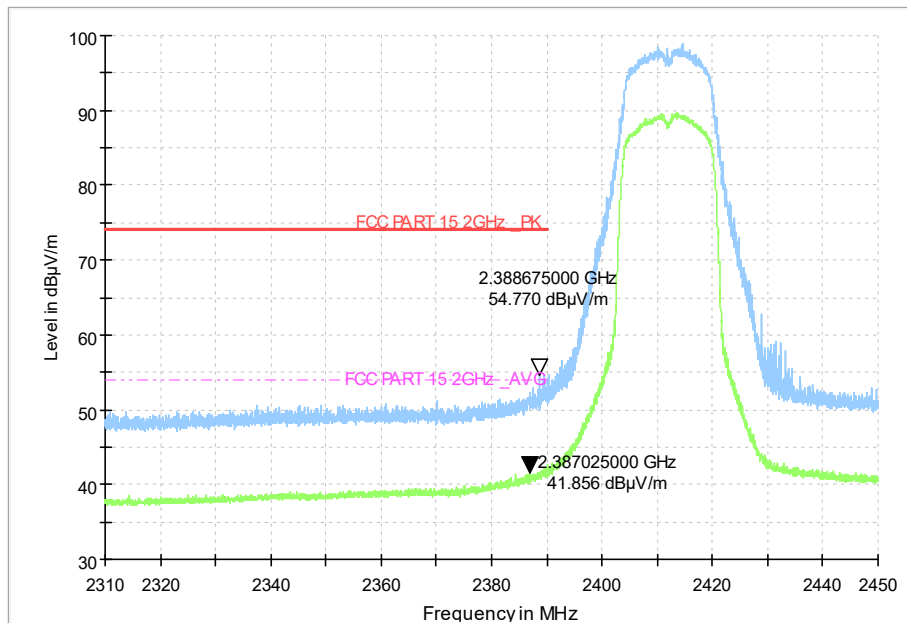


**Fig.60 Radiated Restricted Band (802.11g, CH1, 2.38GHz~2.45GHz)**

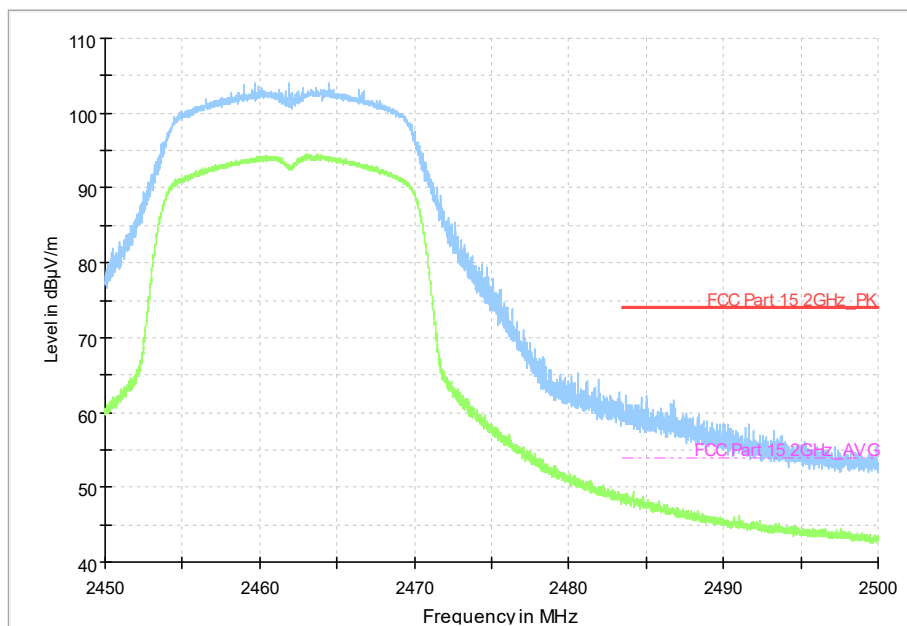

**Fig.61 Radiated Restricted Band (802.11g, CH11, 2.45GHz~2.50GHz)**

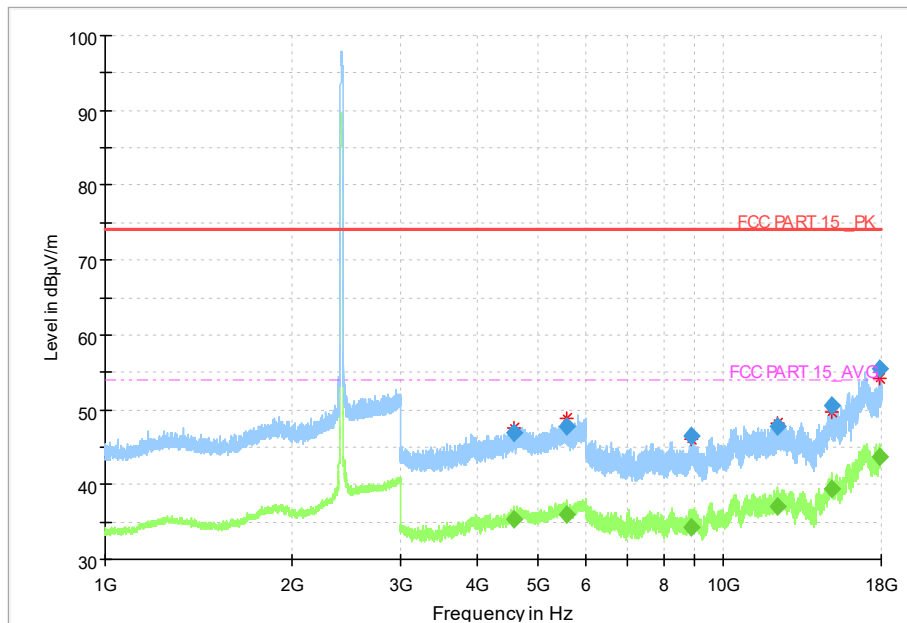


**Fig.62 Radiated Spurious Emission (802.11n-HT20, CH1, 1GHz-18GHz)**

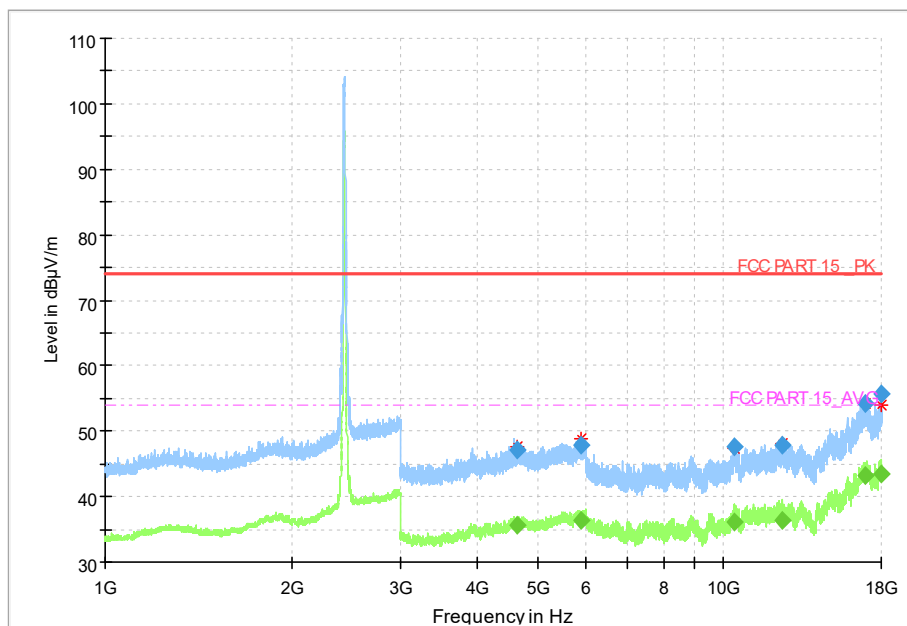


**Fig.63 Radiated Spurious Emission (802.11n-HT20, CH6, 1GHz-18GHz)**




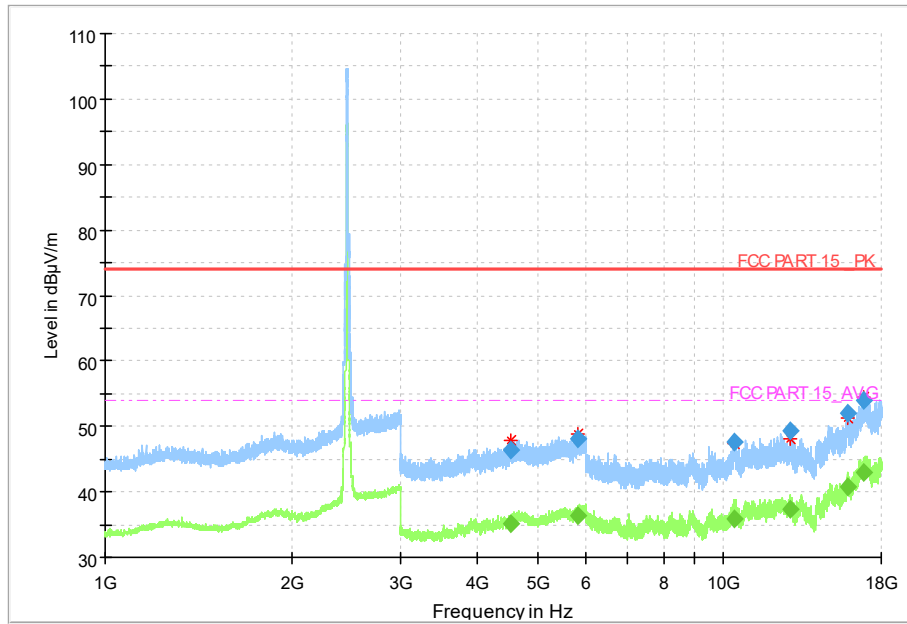


**Fig.64 Radiated Spurious Emission (802.11n-HT20, CH11, 1GHz-18GHz)**

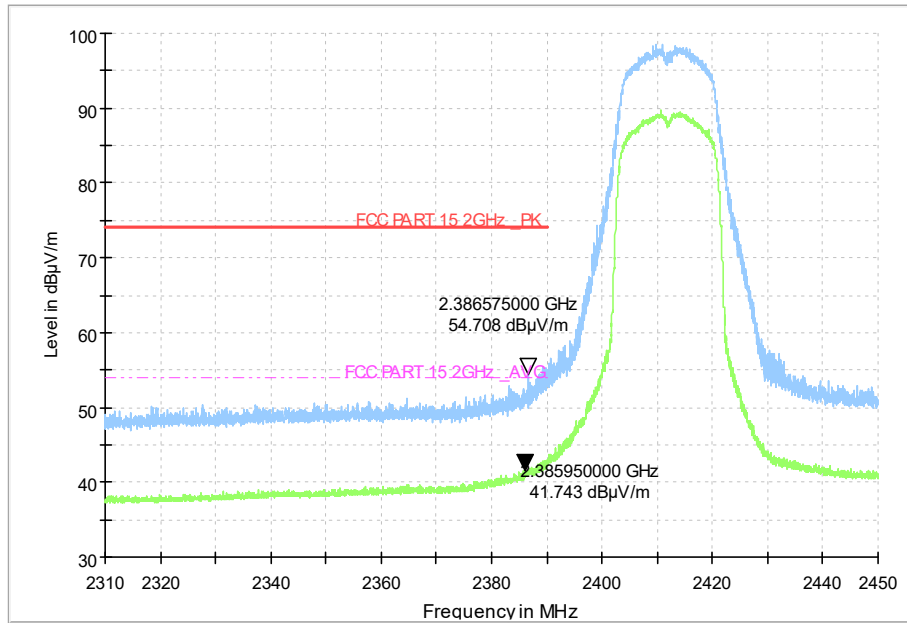


**Fig.65 Radiated Restricted Band (802.11n-HT20, CH1, 2.38GHz~2.45GHz)**

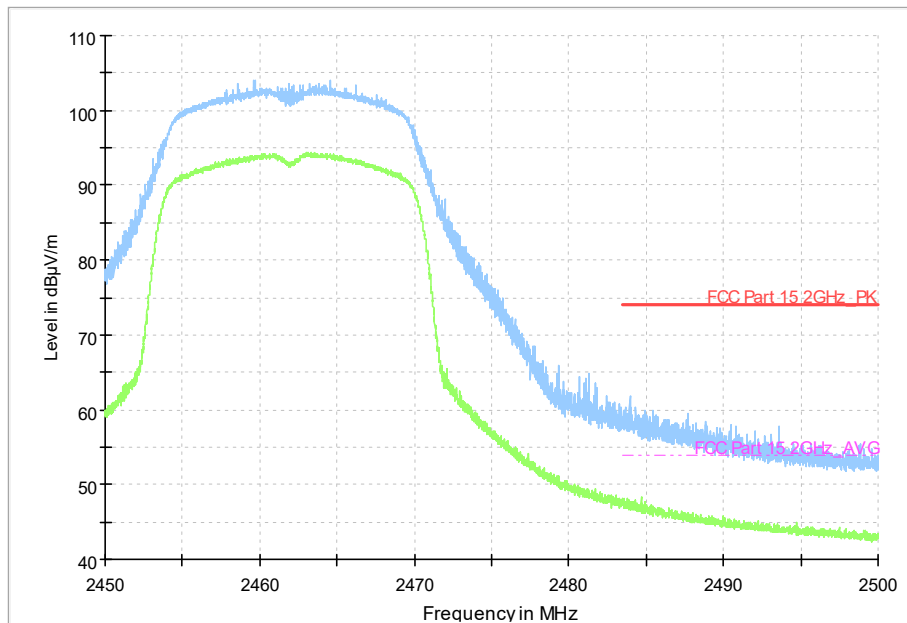


**Fig.66 Radiated Spurious Emission (802.11-HT20, CH11, 2.45GHz~2.50GHz)**

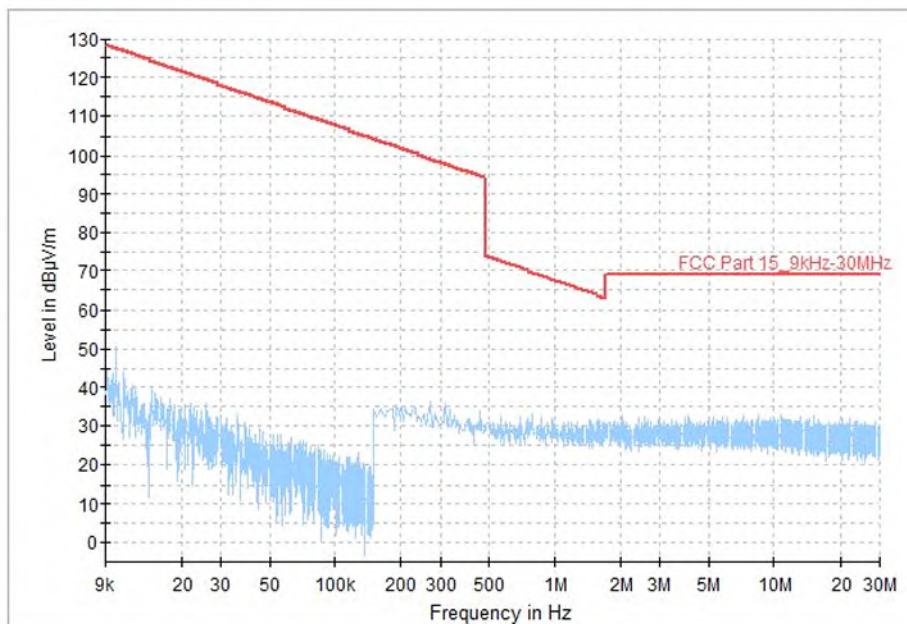

**Fig.67 Radiated Spurious Emission (All channel, 9kHz~30MHz)**

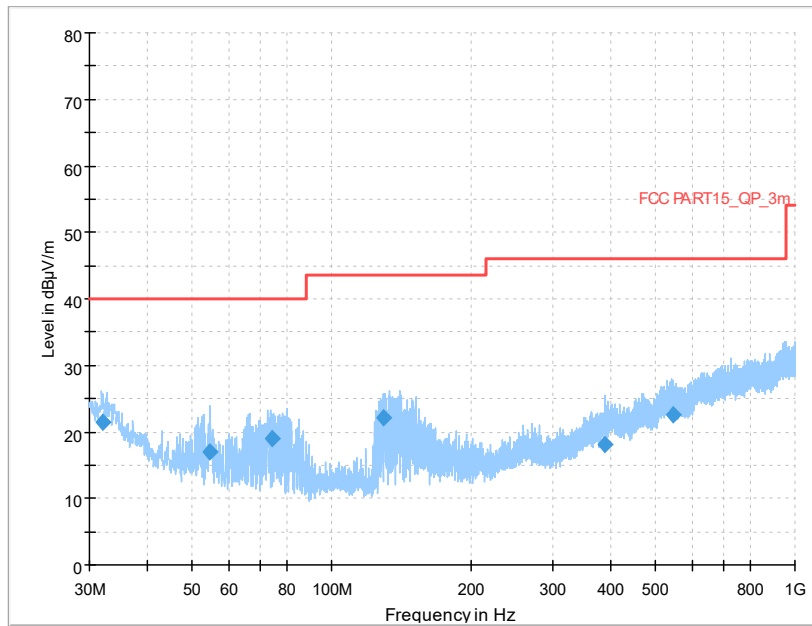

**Fig.68 Radiated Spurious Emission (All channel, 30MHz~1GHz)**

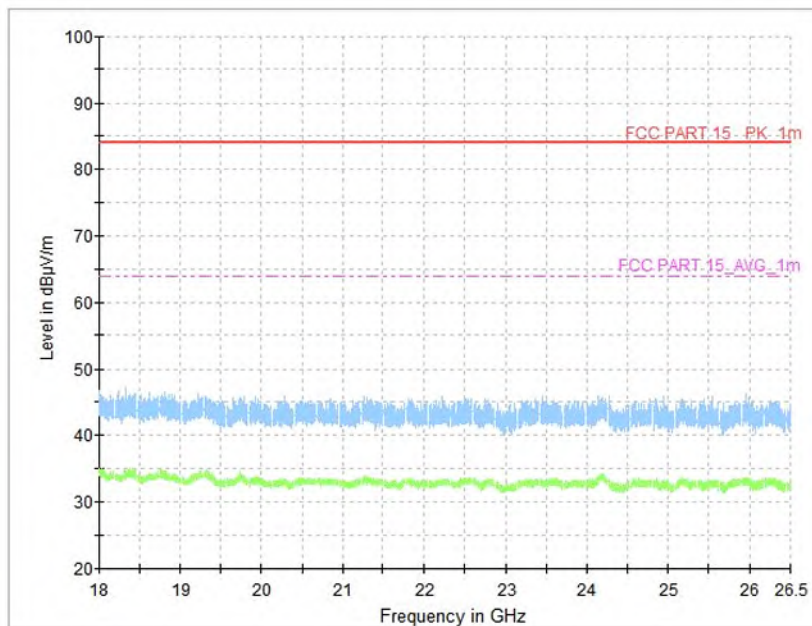

**Fig.69 Radiated Spurious Emission (All channel, 18GHz~26.5GHz)**



### A.7 AC Power line Conducted Emission

Method of Measurement: See ANSI C63.10-clause 6.2.

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Average-peak Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
			Traffic	Idle	
0.15 to 0.5	66 to 56	56 to 46	Fig.70	Fig.71	<b>P</b>
0.5 to 5	56	46			
5 to 30	60	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

**Note:** The measurement results include the L1 and N measurements.

See below for test graphs.

Conclusion: **PASS**

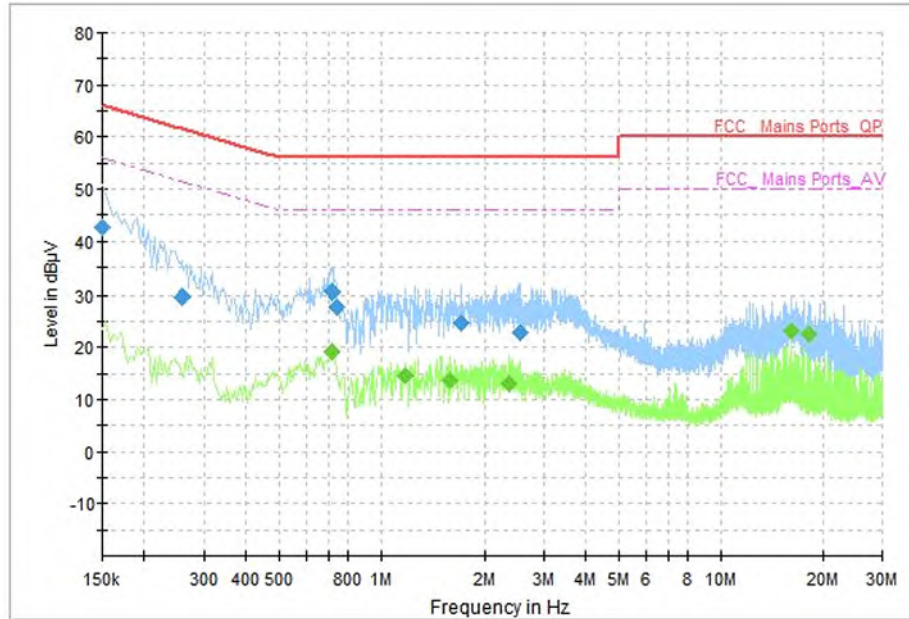


Fig.70 AC Power line Conducted Emission (Traffic)

Measurement Results: Quasi Peak

Frequency (MHz)	Quasi Peak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	42.61	66.00	23.39	N	ON	10
0.258000	29.64	61.50	31.86	L1	ON	10
0.718000	30.34	56.00	25.66	N	ON	10
0.738000	27.57	56.00	28.43	N	ON	10
1.706000	24.73	56.00	31.27	N	ON	10
2.554000	22.87	56.00	33.13	N	ON	10

Measurement Results: Average

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.718000	19.13	46.00	26.87	N	ON	10
1.174000	14.49	46.00	31.51	N	ON	10
1.590000	13.72	46.00	32.28	N	ON	10
2.366000	13.11	46.00	32.89	N	ON	10
16.230000	23.27	50.00	26.73	N	ON	11
18.242000	22.56	50.00	27.44	N	ON	10

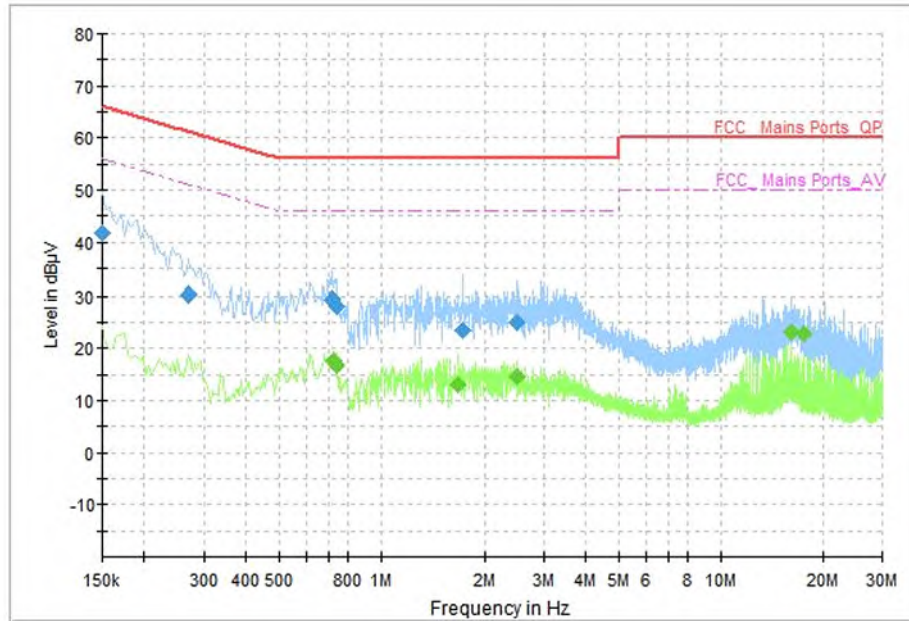


Fig.71 AC Power line Conducted Emission (Idle)

**Measurement Results: Quasi Peak**

Frequency (MHz)	Quasi Peak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	41.77	66.00	24.23	N	ON	10
0.270000	30.15	61.12	30.97	N	ON	10
0.714000	29.36	56.00	26.64	L1	ON	10
0.738000	28.14	56.00	27.86	N	ON	10
1.726000	23.47	56.00	32.53	N	ON	10
2.490000	25.05	56.00	30.95	N	ON	10

**Measurement Results: Average**

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.722000	17.76	46.00	28.24	L1	ON	10
0.738000	16.64	46.00	29.36	N	ON	10
1.678000	13.10	46.00	32.90	N	ON	10
2.490000	14.68	46.00	31.32	N	ON	10
16.230000	23.25	50.00	26.75	N	ON	11
17.694000	22.68	50.00	27.32	N	ON	11

\*\*\*END OF REPORT\*\*\*