

Test Laboratory: BACL SAR Testing Lab

1_GSM850_GSM Voice_Head Left Cheek_Ch 190

DUT: T5810

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042
Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.813$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.6 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch190/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.231 W/kg

Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.57 V/m; Power Drift = 0.08 dB



Peak SAR (extrapolated) = 0.245 W/kg

SAR(1 g) = 0.192 W/kg; SAR(10 g) = 0.148 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 79.6%

Maximum value of SAR (measured) = 0.227 W/kg

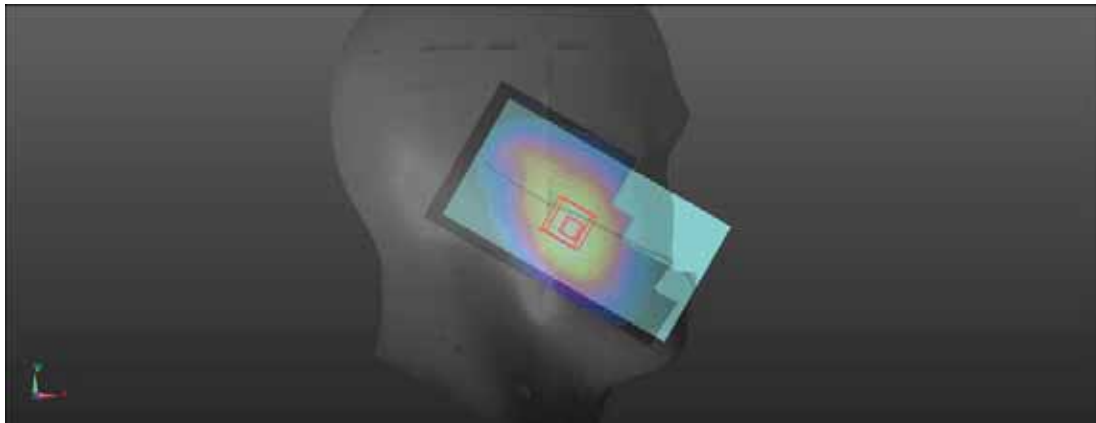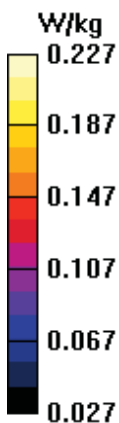

Test Laboratory: BACL SAR Testing Lab

2_GSM850_GSM Voice_Head Left Tilt_Ch 190

DUT: T5810



Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042
Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.813$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.6 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch190/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.142 W/kg

Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.41 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 0.159 W/kg
SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.093 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 77.6%
Maximum value of SAR (measured) = 0.149 W/kg

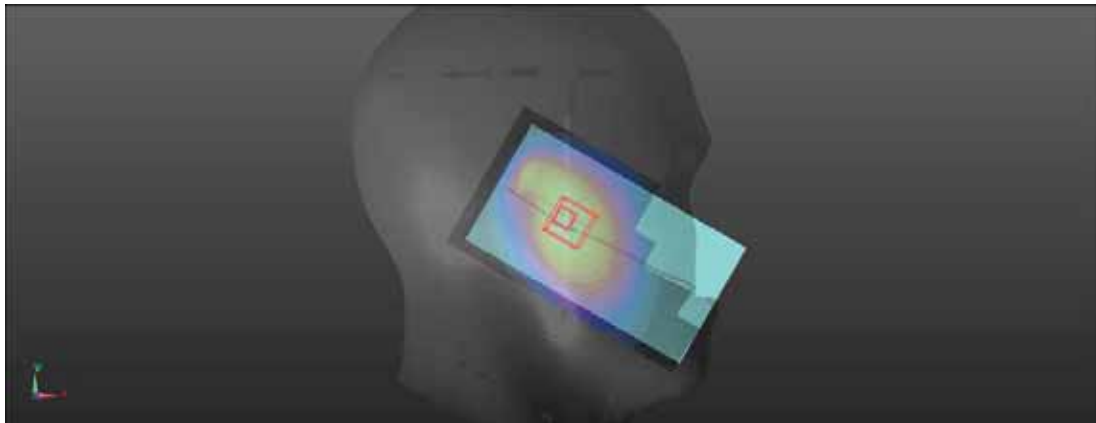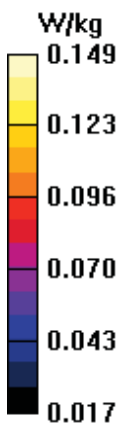

Test Laboratory: BACL SAR Testing Lab

3_GSM850_GSM Voice_Head Right Cheek_Ch 190

DUT: T5810


Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042
Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.813$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.6 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch190/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.208 W/kg

Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.40 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 0.226 W/kg
SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.144 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 79.9%
Maximum value of SAR (measured) = 0.212 W/kg

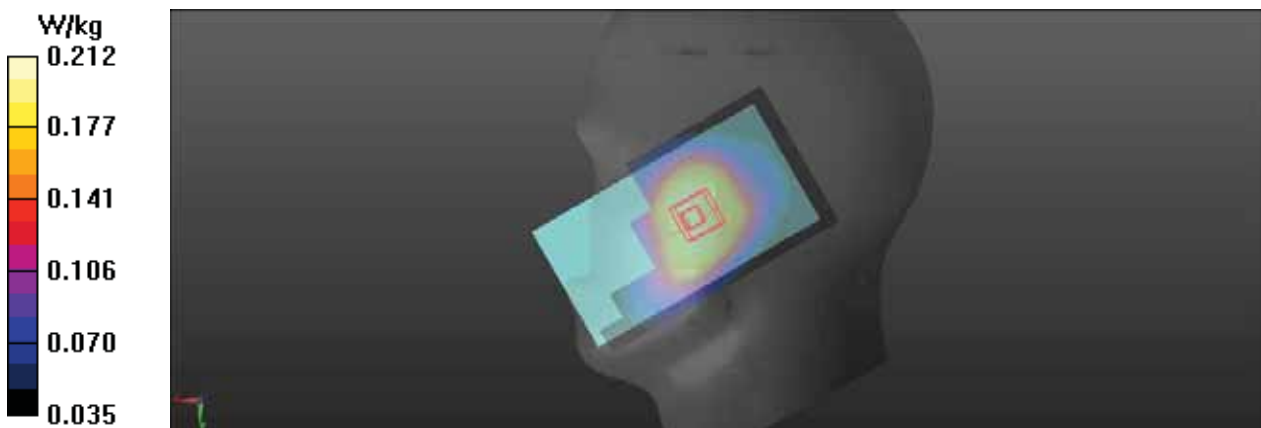

Test Laboratory: BACL SAR Testing Lab

4_GSM850_GSM Voice_Head Right Tilt_Ch 190

DUT: T5810

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042
Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.813$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.6 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch190/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.165 W/kg

Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.42 V/m; Power Drift = -0.09 dB



Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.111 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 80.8%

Maximum value of SAR (measured) = 0.167 W/kg

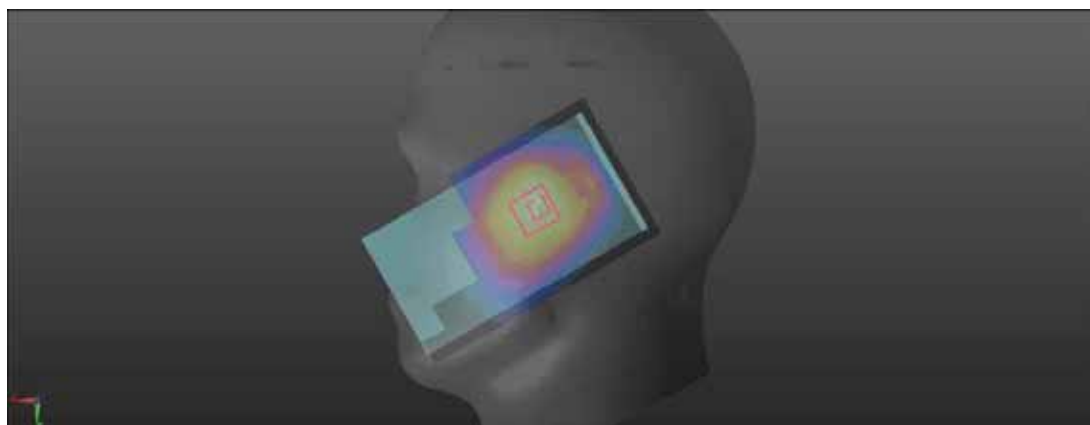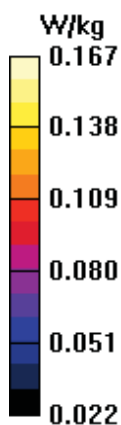

Test Laboratory: BACL SAR Testing Lab

5_GSM850_GSM Voice_Head Left Cheek_Ch 190

DUT: T5810

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042
Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.813$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.6 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch190/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.229 W/kg

Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.46 V/m; Power Drift = 0.04 dB



Peak SAR (extrapolated) = 0.251 W/kg

SAR(1 g) = 0.191 W/kg; SAR(10 g) = 0.148 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 76.7%

Maximum value of SAR (measured) = 0.231 W/kg

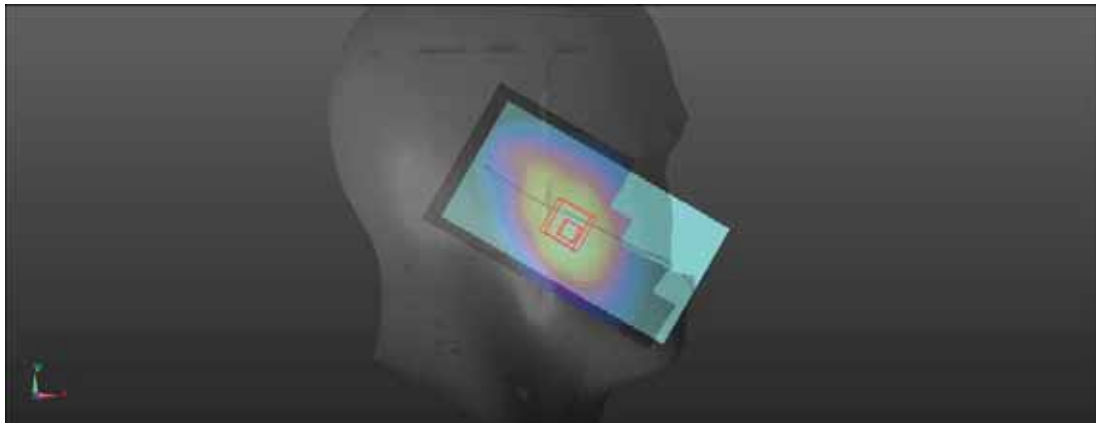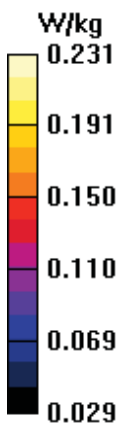

Test Laboratory: BACL SAR Testing Lab

150_GSM 850_GPRS(4TX Slots)_Body Front_Ch 190

DUT: T5810

Communication System: UID 0, GPRS 4TX (0); Frequency: 836.6 MHz; Duty Cycle: 1:1.99986
Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.813$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.6 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch190/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.589 W/kg

Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.78 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.654 W/kg

SAR(1 g) = 0.486 W/kg; SAR(10 g) = 0.369 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 74.6%

Maximum value of SAR (measured) = 0.595 W/kg

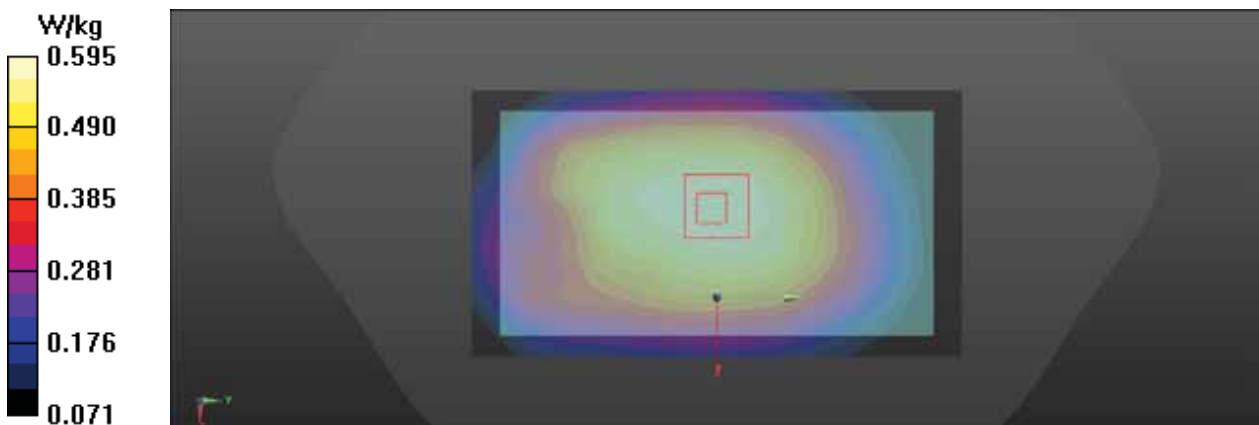

Test Laboratory: BACL SAR Testing Lab

151_GSM 850_GPRS(4TX Slots)_Body Back_Ch 190

DUT: T5810

Communication System: UID 0, GPRS 4TX (0); Frequency: 836.6 MHz; Duty Cycle: 1:1.99986
Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.813$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.6 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch190/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.564 W/kg

Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.16 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.627 W/kg

SAR(1 g) = 0.461 W/kg; SAR(10 g) = 0.346 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 74.2%

Maximum value of SAR (measured) = 0.569 W/kg

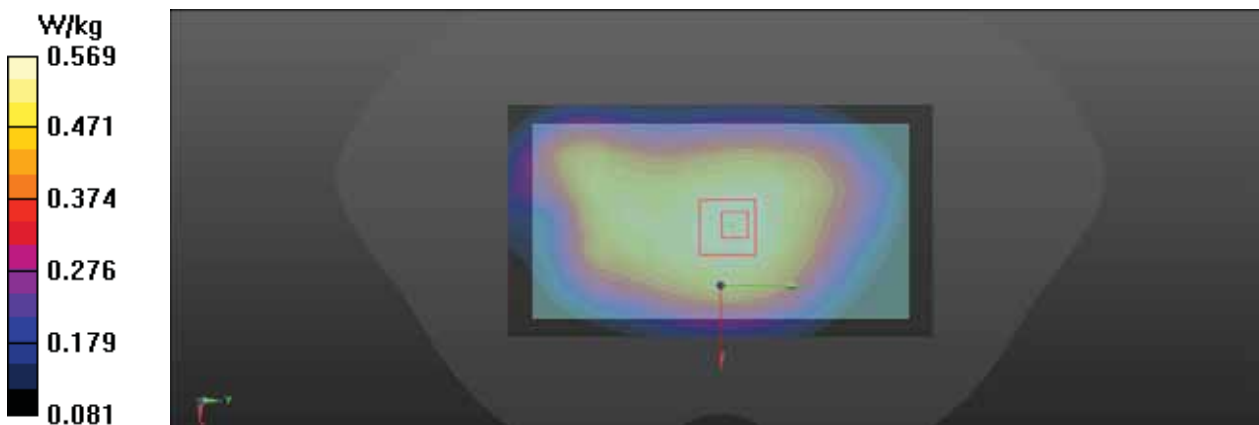

Test Laboratory: BACL SAR Testing Lab

152_GSM 850_GPRS(4TX Slots)_Body Left_Ch 190

DUT: T5810

Communication System: UID 0, GPRS 4TX (0); Frequency: 836.6 MHz; Duty Cycle: 1:1.99986
Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.813$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.6 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch190/Area Scan (21x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.584 W/kg

Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.81 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.671 W/kg

SAR(1 g) = 0.450 W/kg; SAR(10 g) = 0.310 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 67.4%

Maximum value of SAR (measured) = 0.585 W/kg

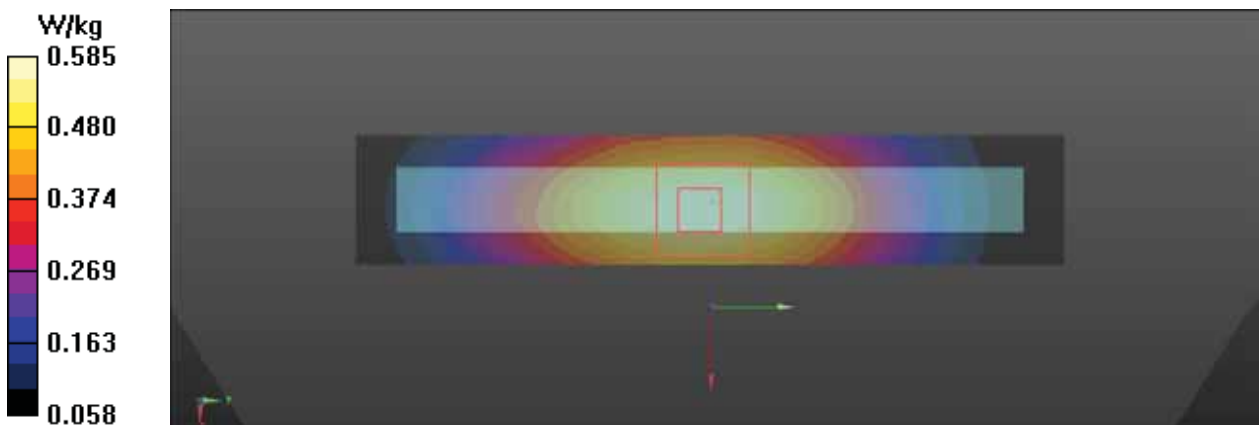

Test Laboratory: BACL SAR Testing Lab

153_GSM 850_GPRS(4TX Slots)_Body Right_Ch 190

DUT: T5810

Communication System: UID 0, GPRS 4TX (0); Frequency: 836.6 MHz; Duty Cycle: 1:1.99986
Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.813$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.6 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch190/Area Scan (21x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.403 W/kg

Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.64 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.467 W/kg

SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.218 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 67.8%

Maximum value of SAR (measured) = 0.412 W/kg

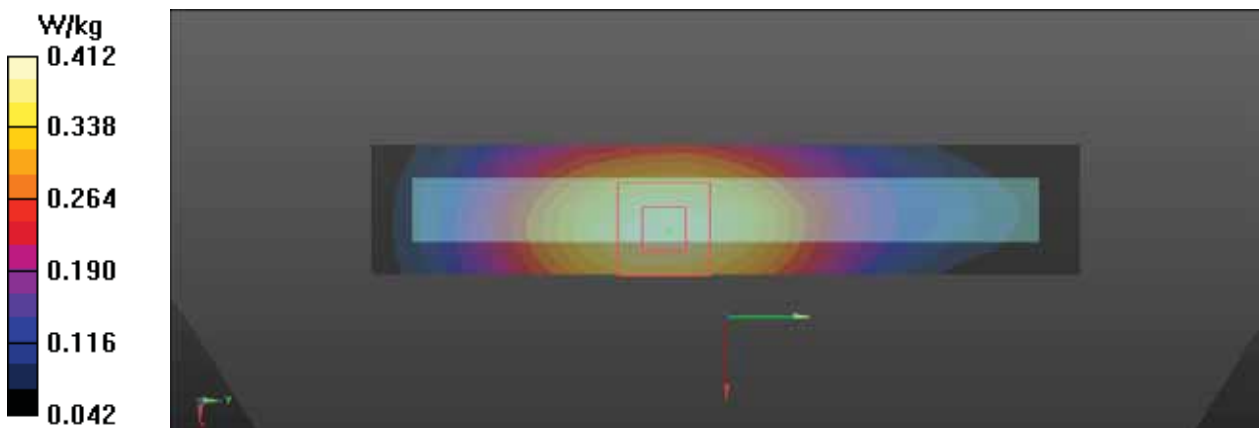

Test Laboratory: BACL SAR Testing Lab

154_GSM 850_GPRS(4TX Slots)_Body Bottom_Ch 190

DUT: T5810


Communication System: UID 0, GPRS 4TX (0); Frequency: 836.6 MHz; Duty Cycle: 1:1.99986
Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.813$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.6 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch190/Area Scan (21x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.257 W/kg

Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.68 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 0.374 W/kg
SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.096 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 50%
Maximum value of SAR (measured) = 0.288 W/kg

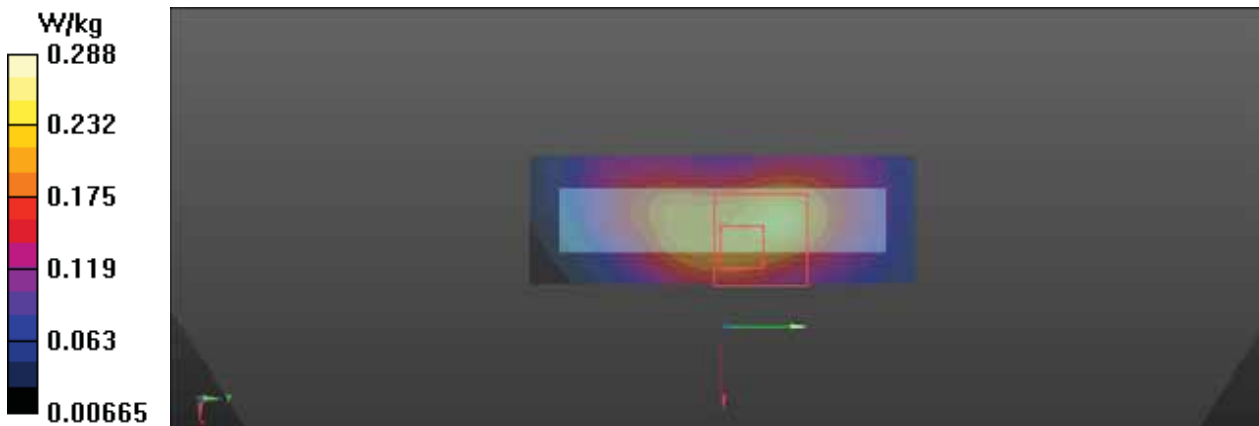

Test Laboratory: BACL SAR Testing Lab

156_GSM 850_GPRS(4TX Slots)_Body Front_Ch 190

DUT: T5810

Communication System: UID 0, GPRS 4TX (0); Frequency: 836.6 MHz; Duty Cycle: 1:1.99986
Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.813$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.6 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch190/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.588 W/kg

Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.49 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.649 W/kg

SAR(1 g) = 0.478 W/kg; SAR(10 g) = 0.365 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 72.6%

Maximum value of SAR (measured) = 0.585 W/kg

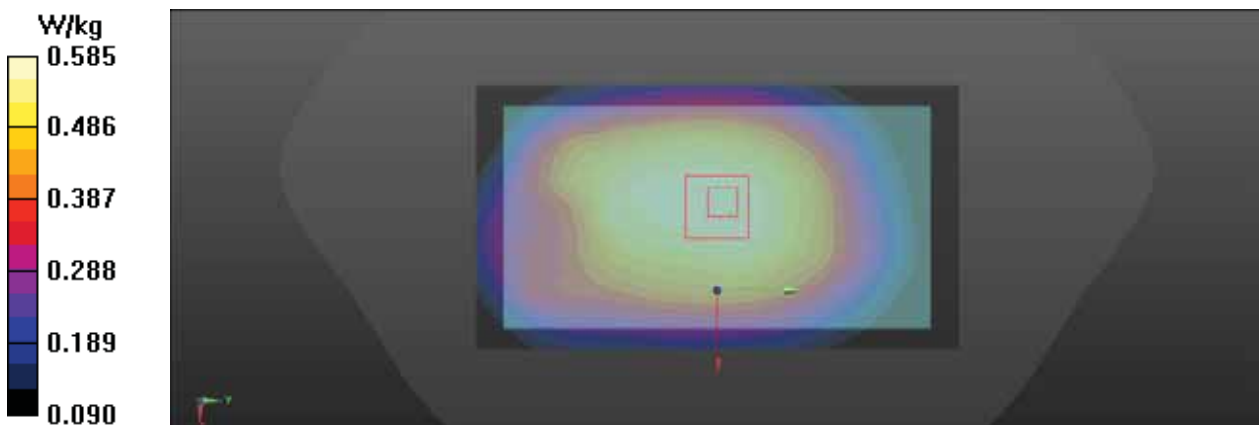

Test Laboratory: BACL SAR Testing Lab

155_GSM 850_GPRS(4TX Slots)_Body Handheld Front_Ch 190

DUT: T5810

Communication System: UID 0, GPRS 4TX (0); Frequency: 836.6 MHz; Duty Cycle: 1:1.99986
Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.813$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.6 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch190/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 4.28 W/kg

Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 49.61 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 4.90 W/kg

SAR(1 g) = 2.03 W/kg; SAR(10 g) = 1.000 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 45%

Maximum value of SAR (measured) = 3.58 W/kg

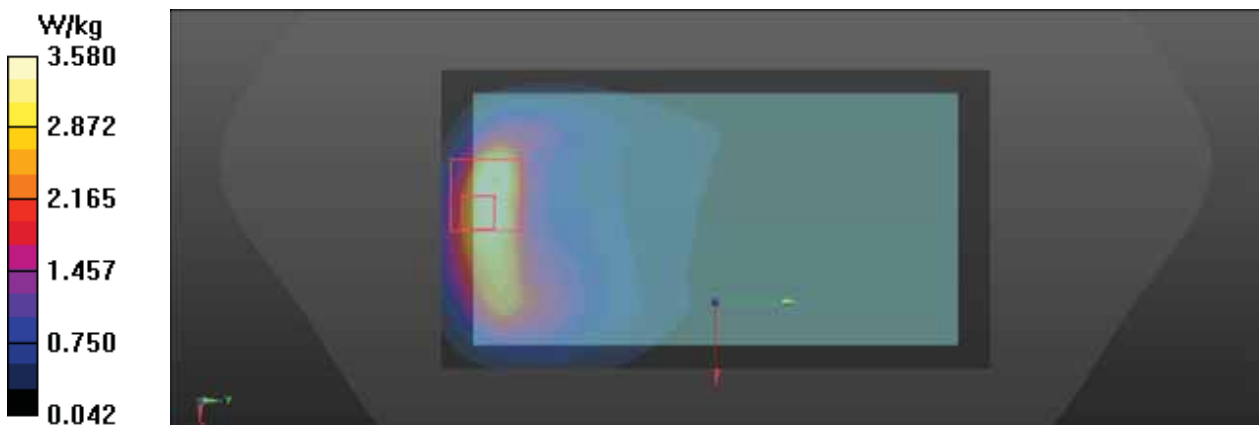

Test Laboratory: BACL SAR Testing Lab

6_GSM1900_GSM Voice_Head Left Cheek_Ch 661

DUT: T5810



Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.395$ S/m; $\epsilon_r = 38.972$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch661/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.395 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.63 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.442 W/kg
SAR(1 g) = 0.333 W/kg; SAR(10 g) = 0.254 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 77%
Maximum value of SAR (measured) = 0.405 W/kg

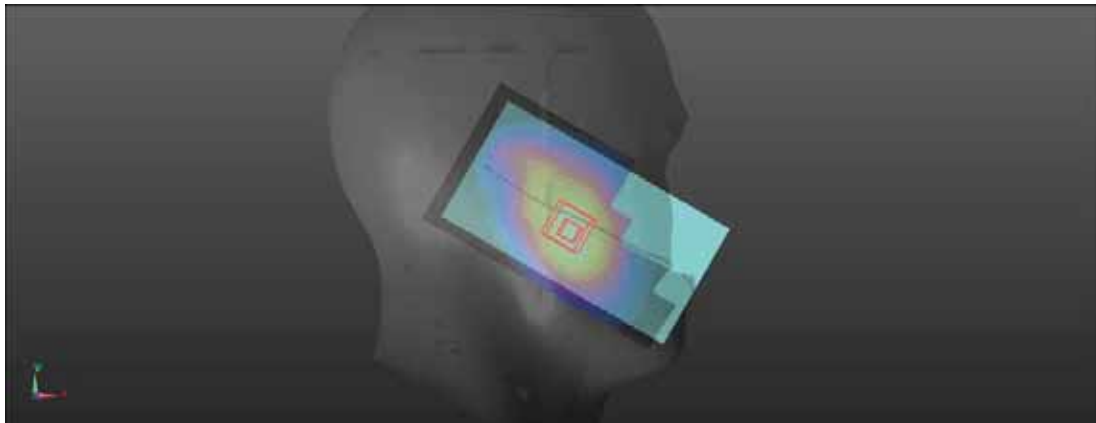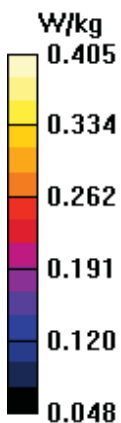

Test Laboratory: BACL SAR Testing Lab

7_GSM1900_GSM Voice_Head Left Tile_Ch 661

DUT: T5810



Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.395$ S/m; $\epsilon_r = 38.972$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch661/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.257 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.06 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.283 W/kg
SAR(1 g) = 0.211 W/kg; SAR(10 g) = 0.160 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 75.4%
Maximum value of SAR (measured) = 0.258 W/kg

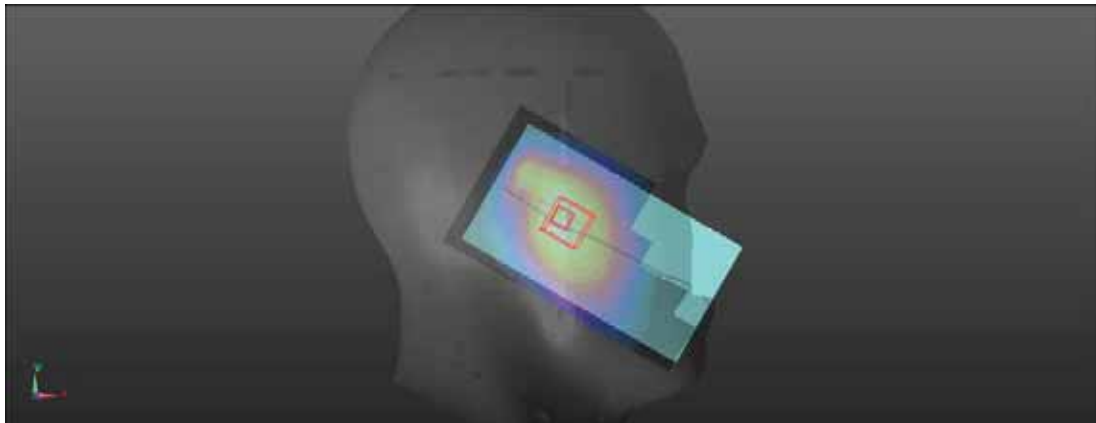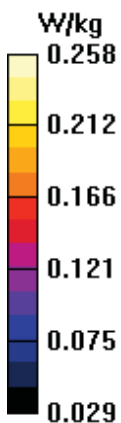

Test Laboratory: BACL SAR Testing Lab

8_GSM1900_GSM Voice_Head Right Cheek_Ch 661

DUT: T5810

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.395$ S/m; $\epsilon_r = 38.972$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch661/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.368 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.78 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.396 W/kg

SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.248 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 79.1%

Maximum value of SAR (measured) = 0.368 W/kg

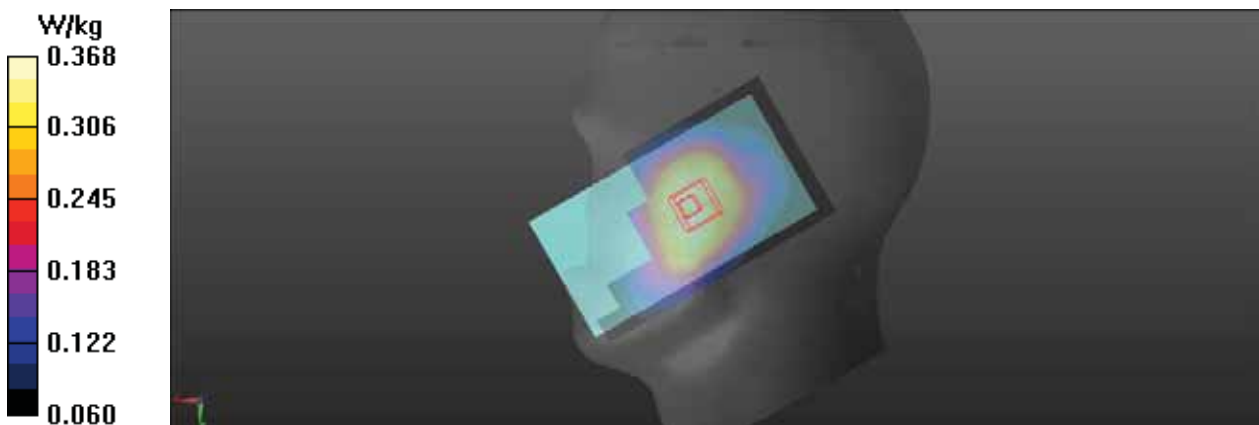

Test Laboratory: BACL SAR Testing Lab

9_GSM1900_GSM Voice_Head Right Tilt_Ch 661

DUT: T5810



Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.395$ S/m; $\epsilon_r = 38.972$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch661/Area Scan (61x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.290 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 14.12 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.321 W/kg
SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.190 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 73.8%
Maximum value of SAR (measured) = 0.292 W/kg

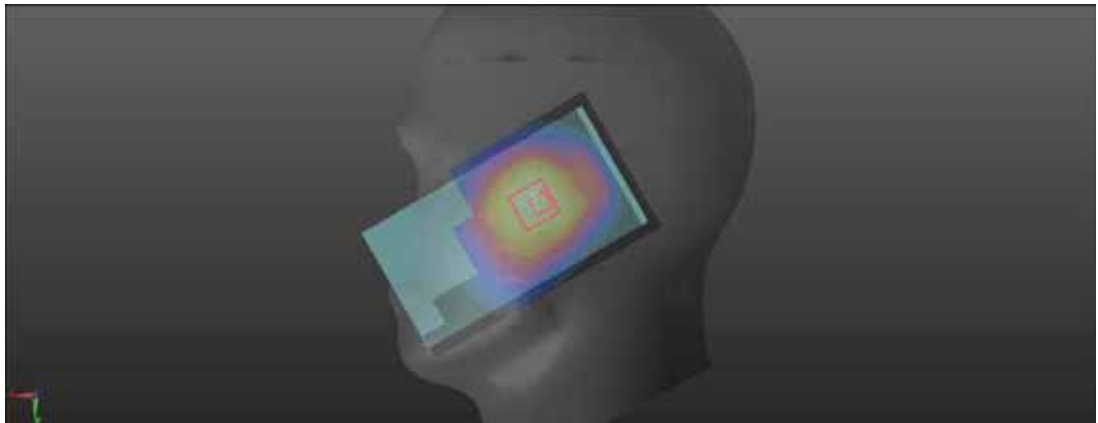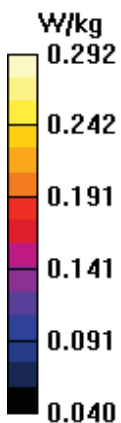

Test Laboratory: BACL SAR Testing Lab

10_GSM1900_GSM Voice_Head Left Cheek_Ch 661

DUT: T5810

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.395$ S/m; $\epsilon_r = 38.972$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch661/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.415 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.46 V/m; Power Drift = -0.02 dB



Peak SAR (extrapolated) = 0.433 W/kg

SAR(1 g) = 0.330 W/kg; SAR(10 g) = 0.253 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 78%

Maximum value of SAR (measured) = 0.396 W/kg

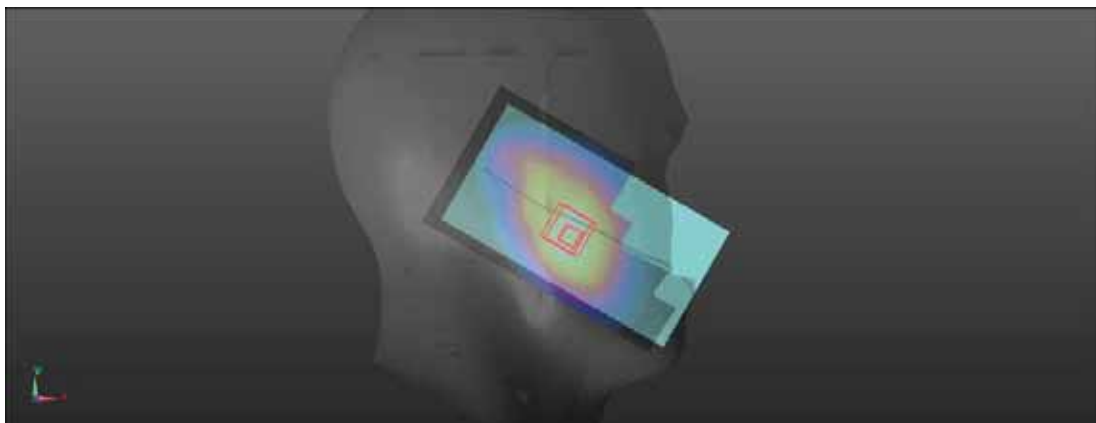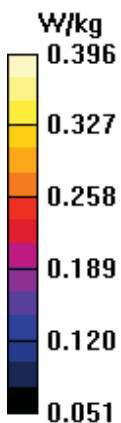

Test Laboratory: BACL SAR Testing Lab

157_GSM 1900_GPRS(4TX Slots)_Body Front_Ch 661

DUT: T5810

Communication System: UID 0, GPRS 4TX (0); Frequency: 1880 MHz; Duty Cycle: 1:1.99986
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.395$ S/m; $\epsilon_r = 38.972$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch661/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.03 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.50 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.828 W/kg; SAR(10 g) = 0.629 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 73.4%

Maximum value of SAR (measured) = 1.02 W/kg

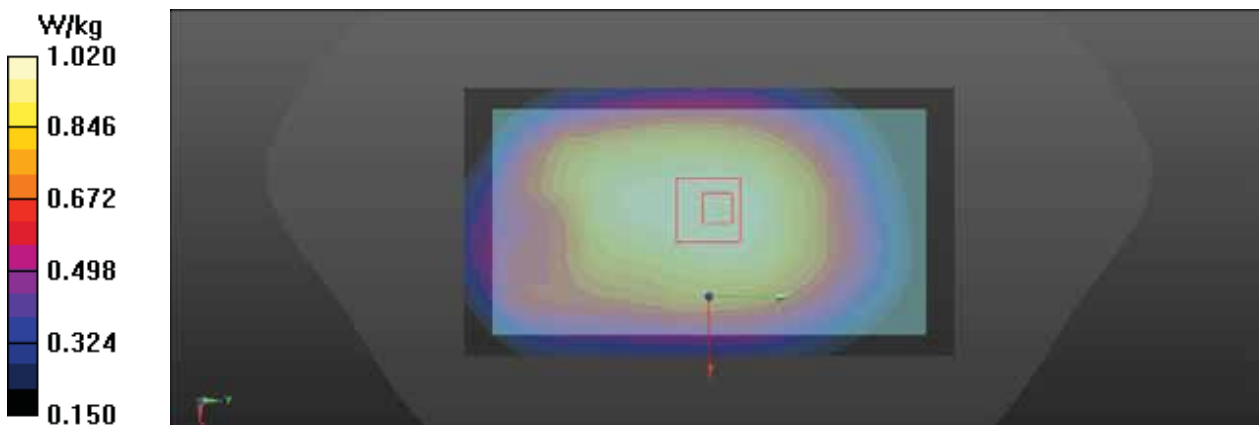

Test Laboratory: BACL SAR Testing Lab

157-1_GSM 1900_GPRS(4TX Slots)_Body Front_Ch 512

DUT: T5810

Communication System: UID 0, GPRS 4TX (0); Frequency: 1850.2 MHz; Duty Cycle: 1:1.99986
Medium: HSL 1900 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 39.043$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1850.2 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch512/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.04 W/kg

Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.81 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.849 W/kg; SAR(10 g) = 0.645 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 72.4%

Maximum value of SAR (measured) = 1.04 W/kg

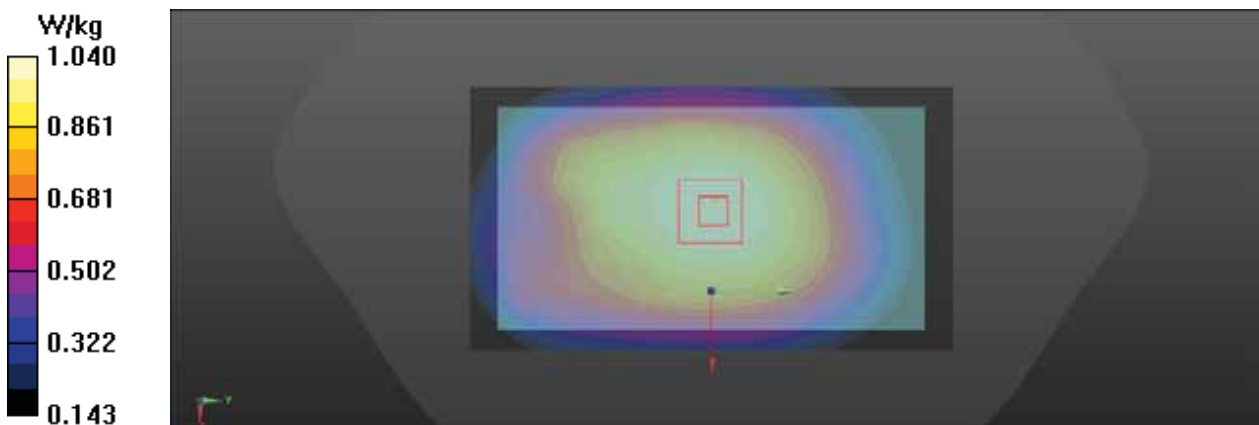

Test Laboratory: BACL SAR Testing Lab

157-2_GSM 1900_GPRS(4TX Slots)_Body Front_Ch 810

DUT: T5810

Communication System: UID 0, GPRS 4TX (0); Frequency: 1909.8 MHz; Duty Cycle: 1:1.99986
Medium: HSL 1900 Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 38.895$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1909.8 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch810/Area Scan (61x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.997 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 27.01 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.801 W/kg; SAR(10 g) = 0.609 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 70.7%

Maximum value of SAR (measured) = 0.998 W/kg

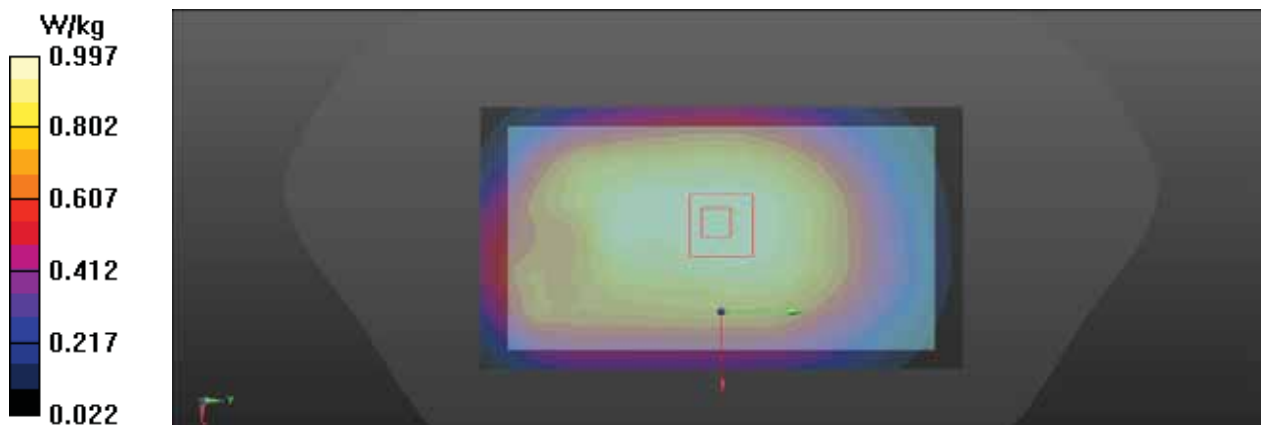

Test Laboratory: BACL SAR Testing Lab

158_GSM 1900_GPRS(4TX Slots)_Body Back_Ch 661

DUT: T5810

Communication System: UID 0, GPRS 4TX (0); Frequency: 1880 MHz; Duty Cycle: 1:1.99986
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.395$ S/m; $\epsilon_r = 38.972$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch661/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.02 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.99 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.814 W/kg; SAR(10 g) = 0.609 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 72.4%

Maximum value of SAR (measured) = 1.01 W/kg

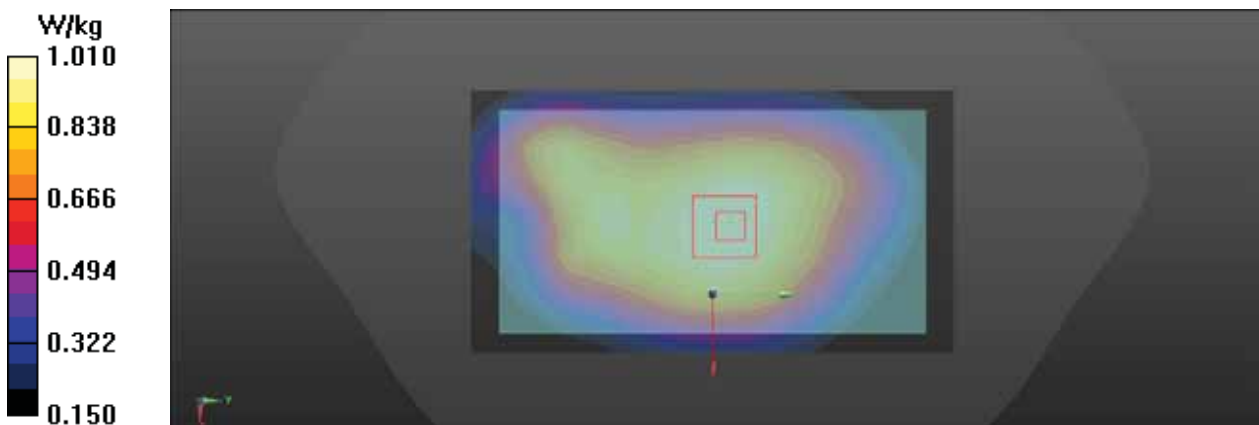

Test Laboratory: BACL SAR Testing Lab

158-1_GSM 1900_GPRS(4TX Slots)_Body Back_Ch 661

DUT: T5810

Communication System: UID 0, GPRS 4TX (0); Frequency: 1850.2 MHz; Duty Cycle: 1:1.99986
Medium: HSL 1900 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 39.043$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1850.2 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch512/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.04 W/kg

Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.17 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.835 W/kg; SAR(10 g) = 0.630 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 71.9%

Maximum value of SAR (measured) = 1.04 W/kg

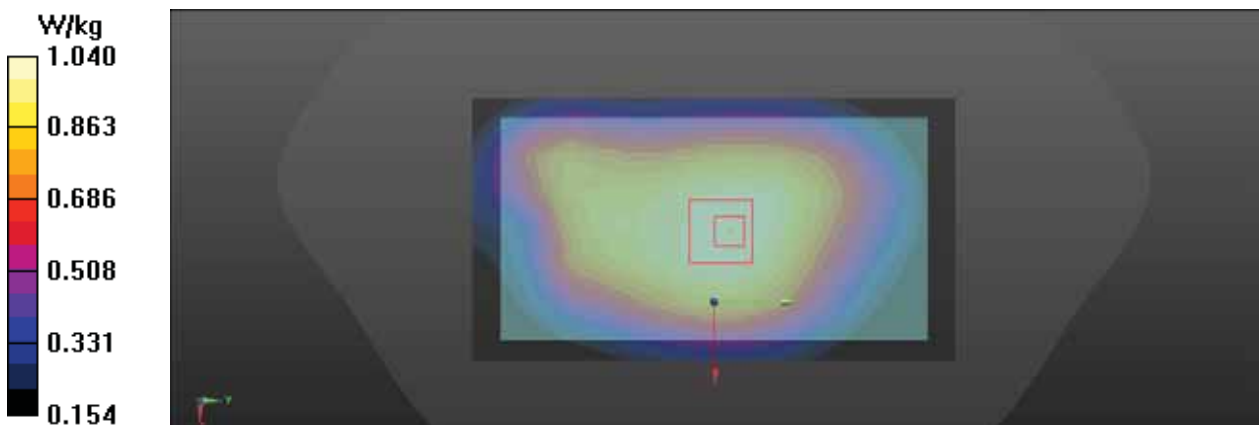

Test Laboratory: BACL SAR Testing Lab

158-2_GSM 1900_GPRS(4TX Slots)_Body Back_Ch 810

DUT: T5810

Communication System: UID 0, GPRS 4TX (0); Frequency: 1909.8 MHz; Duty Cycle: 1:1.99986
Medium: HSL 1900 Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 38.895$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1909.8 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch810/Area Scan (61x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.973 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 26.52 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.789 W/kg; SAR(10 g) = 0.590 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 72.9%

Maximum value of SAR (measured) = 0.977 W/kg

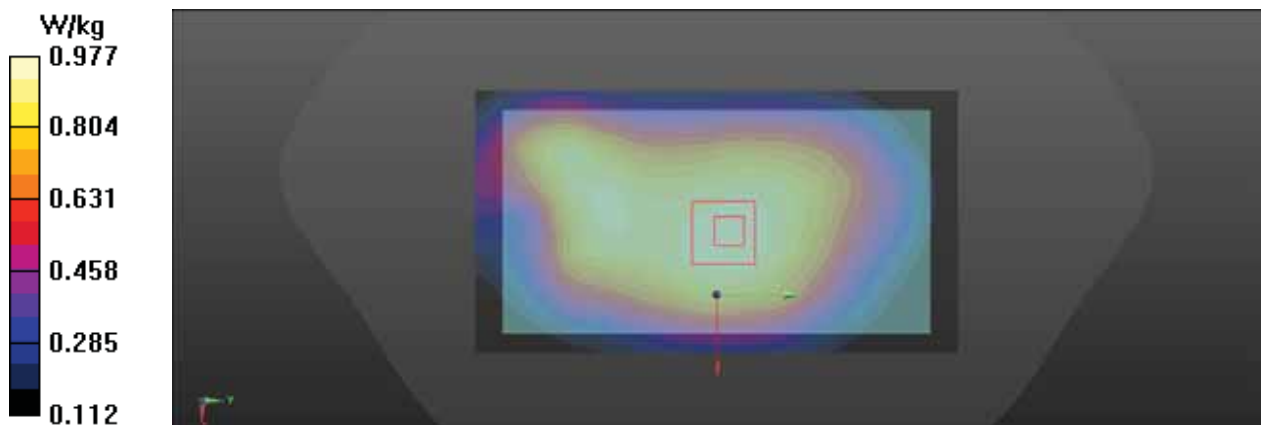

Test Laboratory: BACL SAR Testing Lab

159_GSM 1900_GPRS(4TX Slots)_Body Left_Ch 661

DUT: T5810

Communication System: UID 0, GPRS 4TX (0); Frequency: 1880 MHz; Duty Cycle: 1:1.99986
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.395$ S/m; $\epsilon_r = 38.972$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch661/Area Scan (21x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.01 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.50 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.767 W/kg; SAR(10 g) = 0.528 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 65.1%

Maximum value of SAR (measured) = 1.01 W/kg

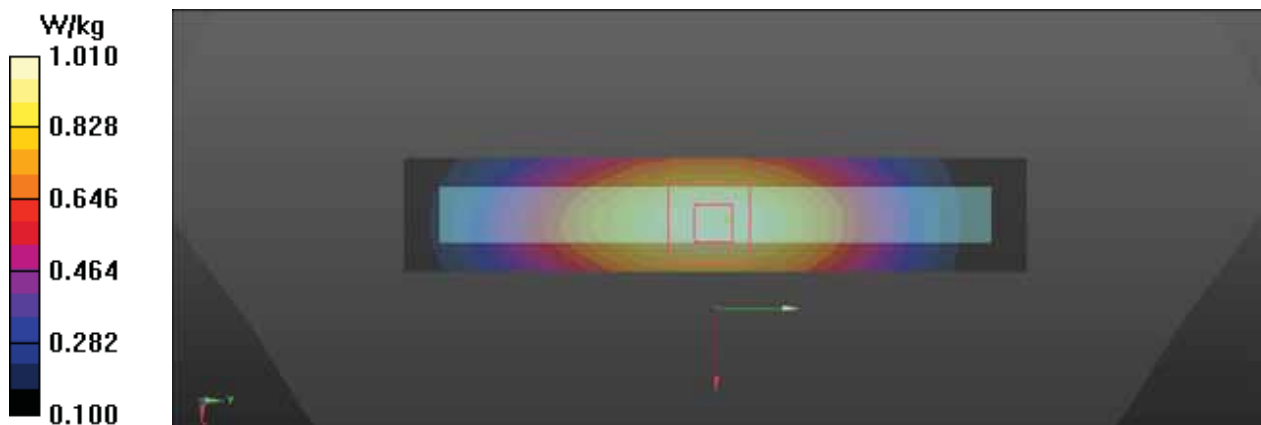

Test Laboratory: BACL SAR Testing Lab

159-1_GSM 1900_GPRS(4TX Slots)_Body Left_Ch 512

DUT: T5810

Communication System: UID 0, GPRS 4TX (0); Frequency: 1850.2 MHz; Duty Cycle: 1:1.99986
Medium: HSL 1900 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 39.043$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1850.2 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch512/Area Scan (21x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.04 W/kg

Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.99 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.794 W/kg; SAR(10 g) = 0.543 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 65.2%

Maximum value of SAR (measured) = 1.05 W/kg

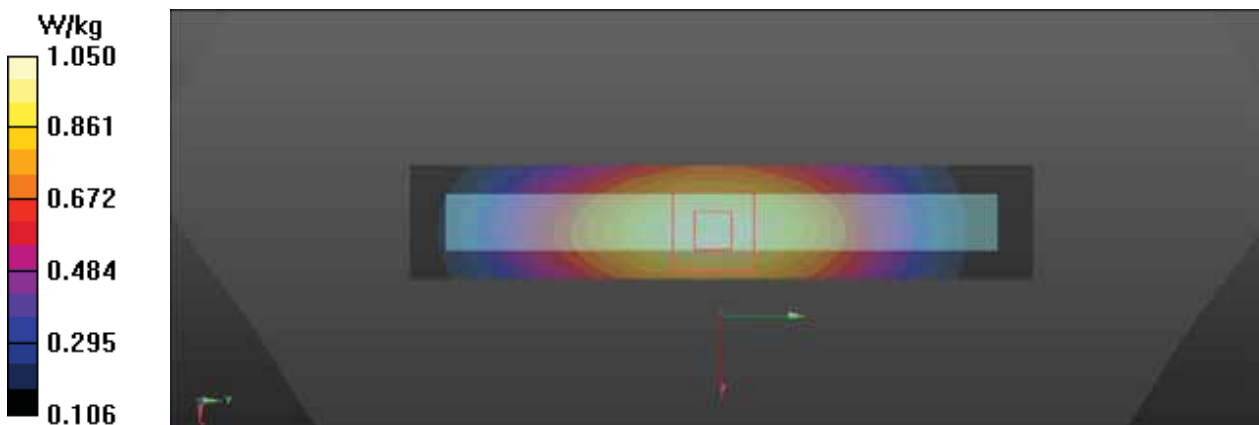

Test Laboratory: BACL SAR Testing Lab

159-2_GSM 1900_GPRS(4TX Slots)_Body Left_Ch 810

DUT: T5810

Communication System: UID 0, GPRS 4TX (0); Frequency: 1909.8 MHz; Duty Cycle: 1:1.99986
Medium: HSL 1900 Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 38.895$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1909.8 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch810/Area Scan (21x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.02 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 27.53 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.765 W/kg; SAR(10 g) = 0.525 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 65.2%

Maximum value of SAR (measured) = 1.02 W/kg

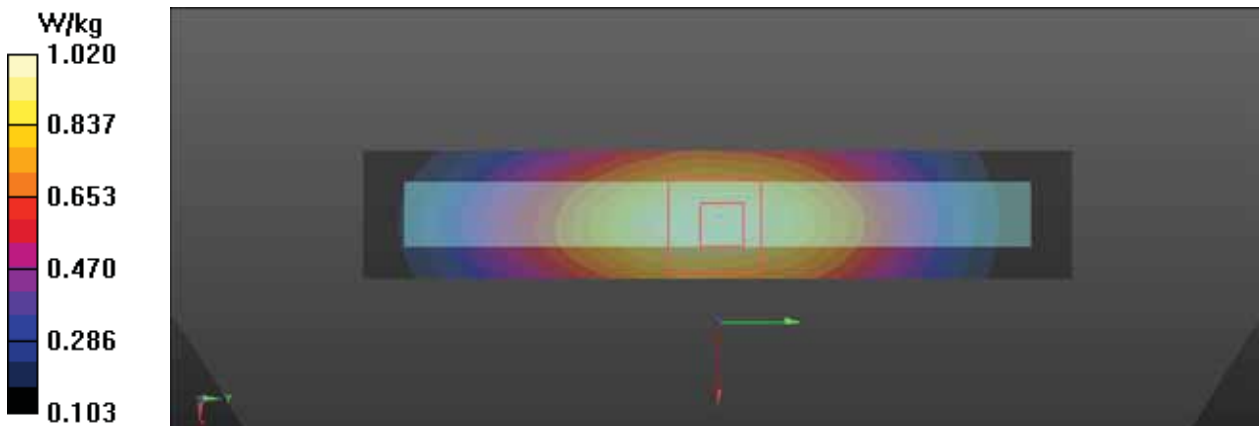

Test Laboratory: BACL SAR Testing Lab

160_GSM 1900_GPRS(4TX Slots)_Body Right_Ch 661

DUT: T5810

Communication System: UID 0, GPRS 4TX (0); Frequency: 1880 MHz; Duty Cycle: 1:1.99986
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.395$ S/m; $\epsilon_r = 38.972$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch661/Area Scan (21x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.717 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.01 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.837 W/kg

SAR(1 g) = 0.543 W/kg; SAR(10 g) = 0.374 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 64.7%

Maximum value of SAR (measured) = 0.725 W/kg

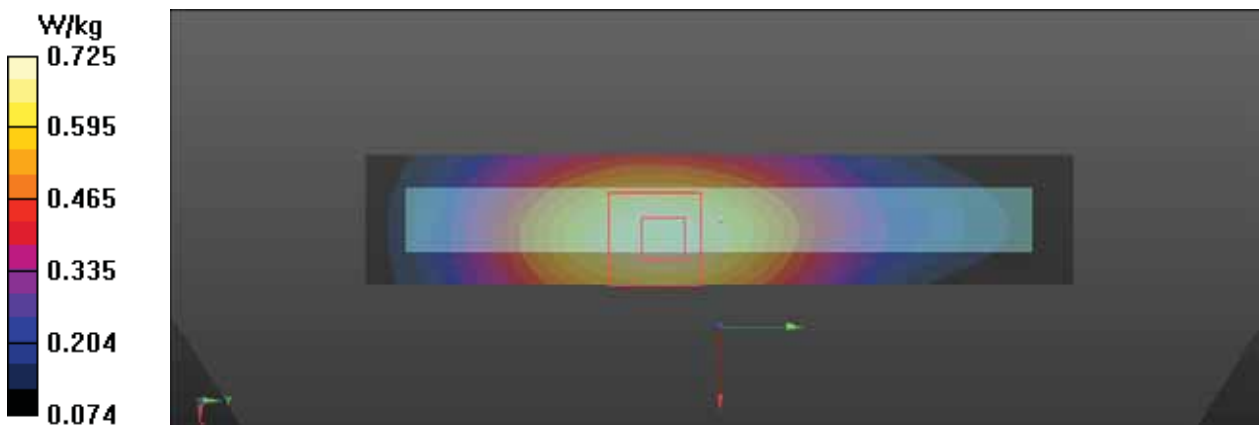

Test Laboratory:BACL.SAR TestingLab

161_GSM 1900_GPRS(4TX Slots)_Body Bottom_Ch 661

DUT: T5810


Communication System: UID 0, GPRS 4TX (0); Frequency: 1880 MHz;Duty Cycle: 1:1.99986
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.395$ S/m; $\epsilon_r = 38.972$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch661/Area Scan (21x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.442 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.72 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.664 W/kg
SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.166 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 49.6%
Maximum value of SAR (measured) = 0.501 W/kg

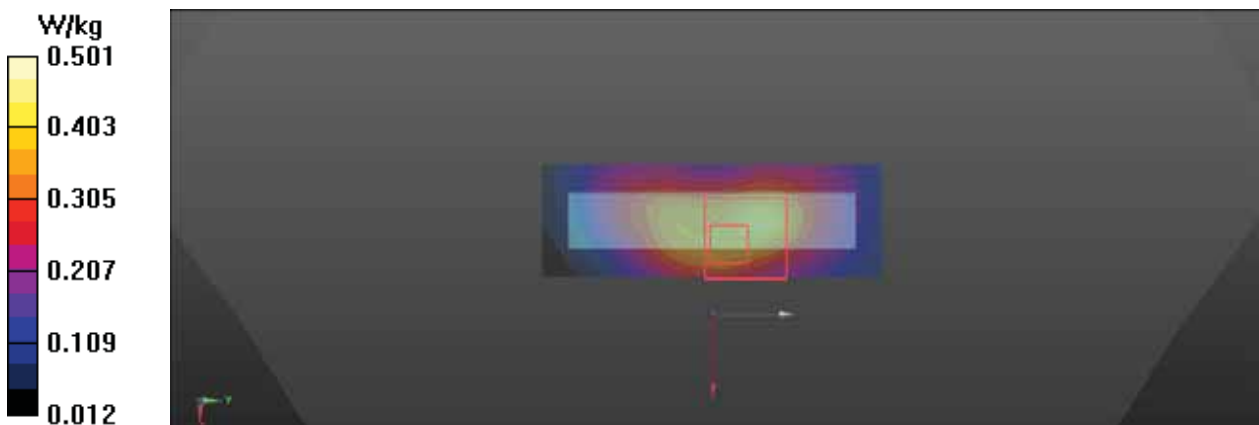

Test Laboratory: BACL SAR Testing Lab

163_GSM 1900_GPRS(4TX Slots)_Body Front_Ch 512

DUT: T5810

Communication System: UID 0, GPRS 4TX (0); Frequency: 1850.2 MHz; Duty Cycle: 1:1.99986
Medium: HSL 1900 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 39.043$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1850.2 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch512/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.03 W/kg

Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.37 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.828 W/kg; SAR(10 g) = 0.626 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 72.9%

Maximum value of SAR (measured) = 1.02 W/kg

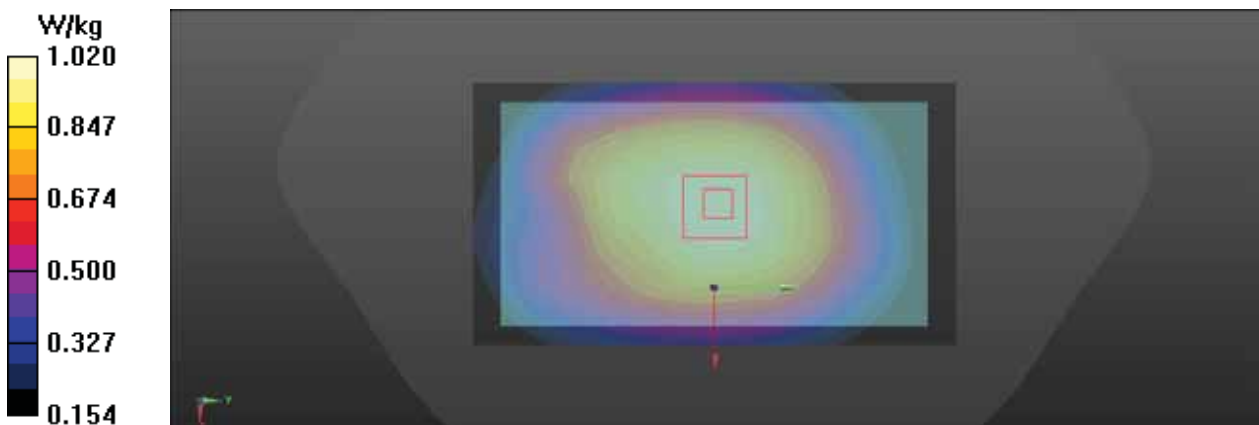

Test Laboratory: BACL SAR Testing Lab

162_GSM 1900_GPRS(4TX Slots)_Body Handheld Front_Ch 512

DUT: T5810


Communication System: UID 0, GPRS 4TX (0); Frequency: 1850.2 MHz; Duty Cycle: 1:1.99986
Medium: HSL 1900 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 39.043$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1850.2 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch512/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 6.69 W/kg

Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 51.78 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 7.80 W/kg
SAR(1 g) = 3.1 W/kg; SAR(10 g) = 1.55 W/kg
Smallest distance from peaks to all points 3 dB below = 6.4 mm
Ratio of SAR at M2 to SAR at M1 = 43.8%
Maximum value of SAR (measured) = 5.44 W/kg

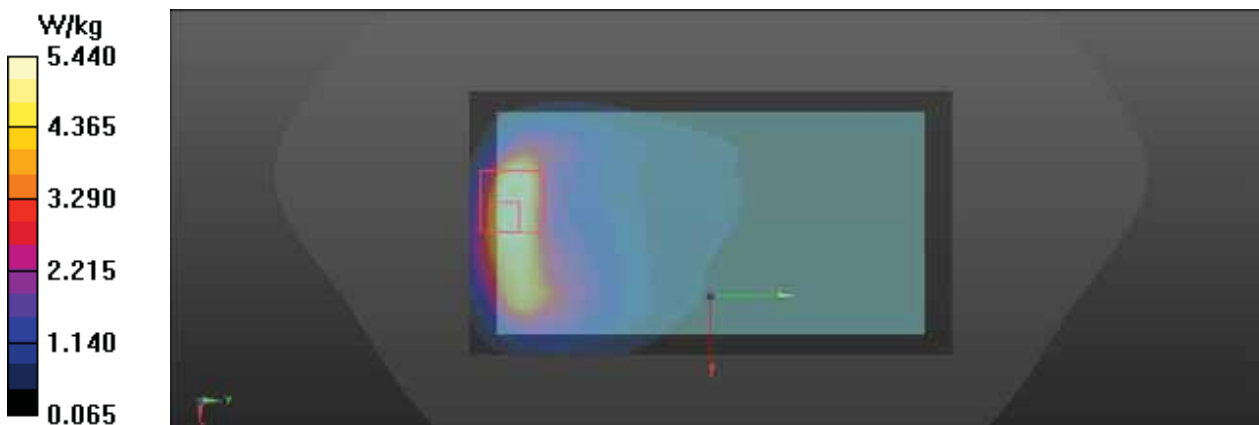

Test Laboratory: BACL SAR Testing Lab

11_WCDMA II_RMC_Head Left Cheek_Ch 9400

DUT: T5810

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch9400/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.183 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.37 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.203 W/kg

SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.078 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 64.8%

Maximum value of SAR (measured) = 0.173 W/kg

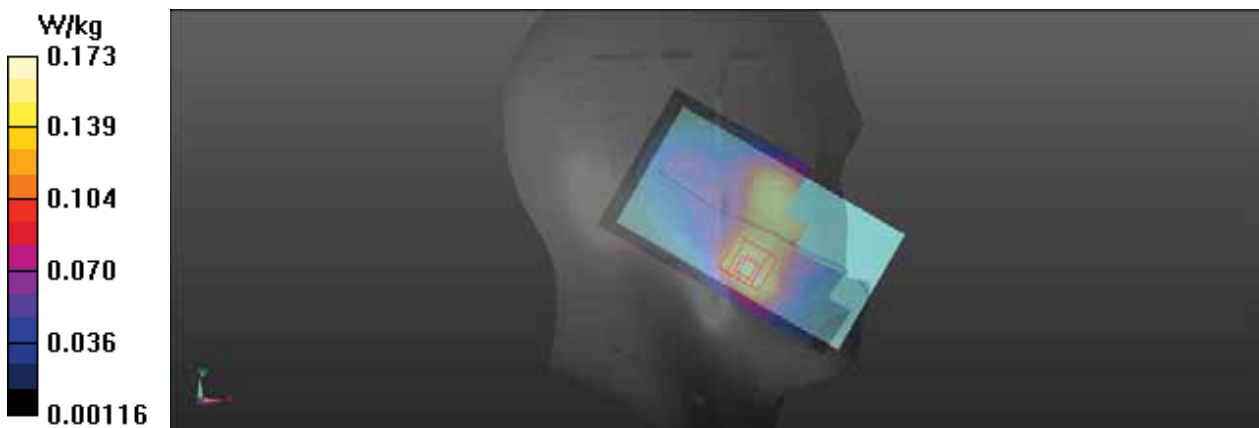

Test Laboratory:BACL.SAR TestingLab

12_WCDMA II_RMC_Head Left Tilt_Ch 9400

DUT: T5810



Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch9400/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.148 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.125 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 0.101 W/kg
SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.035 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 62.4%
Maximum value of SAR (measured) = 0.0919 W/kg

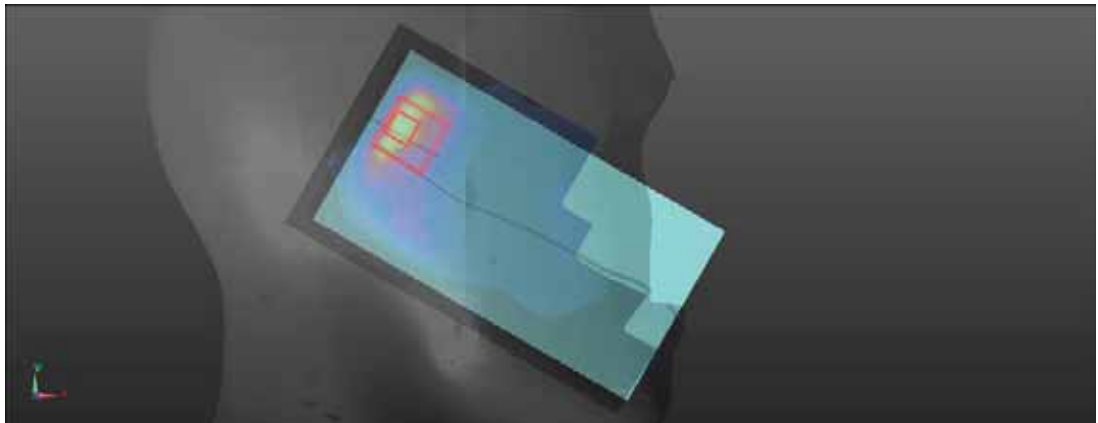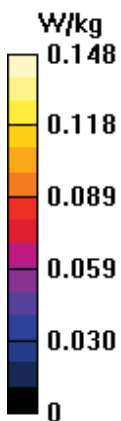

Test Laboratory: BACL SAR Testing Lab

13_WCDMA II_RMC_Head Right Cheek_Ch 9400

DUT: T5810

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch9400/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.373 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.40 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.406 W/kg

SAR(1 g) = 0.258 W/kg; SAR(10 g) = 0.159 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 63.8%

Maximum value of SAR (measured) = 0.354 W/kg



Test Laboratory: BACL SAR Testing Lab

14_WCDMA II_RMC_Head Right Tilt_Ch 9400

DUT: T5810


Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch9400/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.140 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.910 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 0.157 W/kg
SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.057 W/kg
Smallest distance from peaks to all points 3 dB below = 13.7 mm
Ratio of SAR at M2 to SAR at M1 = 61.6%
Maximum value of SAR (measured) = 0.136 W/kg

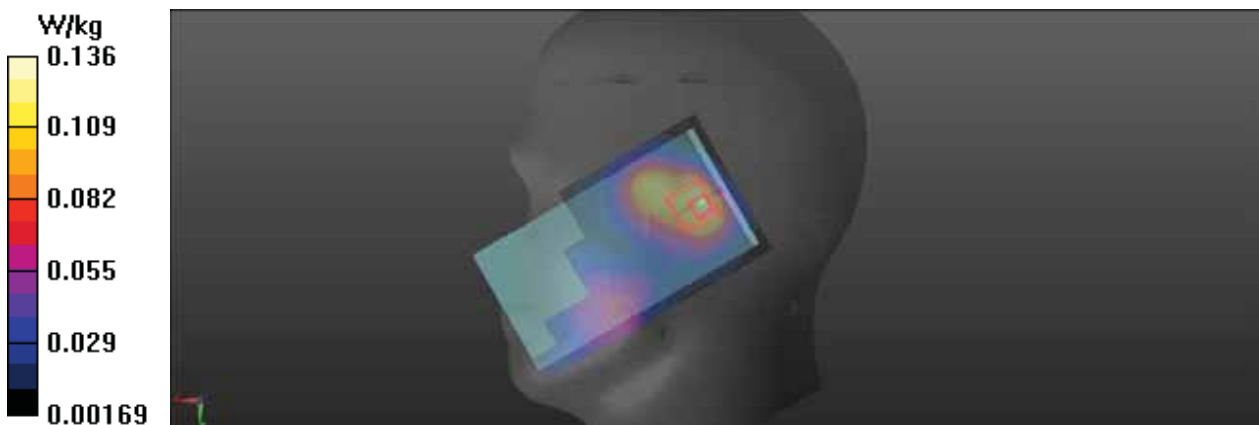

Test Laboratory: BACL SAR Testing Lab

15_WCDMA II_RMC_Head Right Cheek_Ch 9400

DUT: T5810

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch9400/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.376 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.38 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 0.402 W/kg

SAR(1 g) = 0.255 W/kg; SAR(10 g) = 0.158 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 63.8%

Maximum value of SAR (measured) = 0.351 W/kg

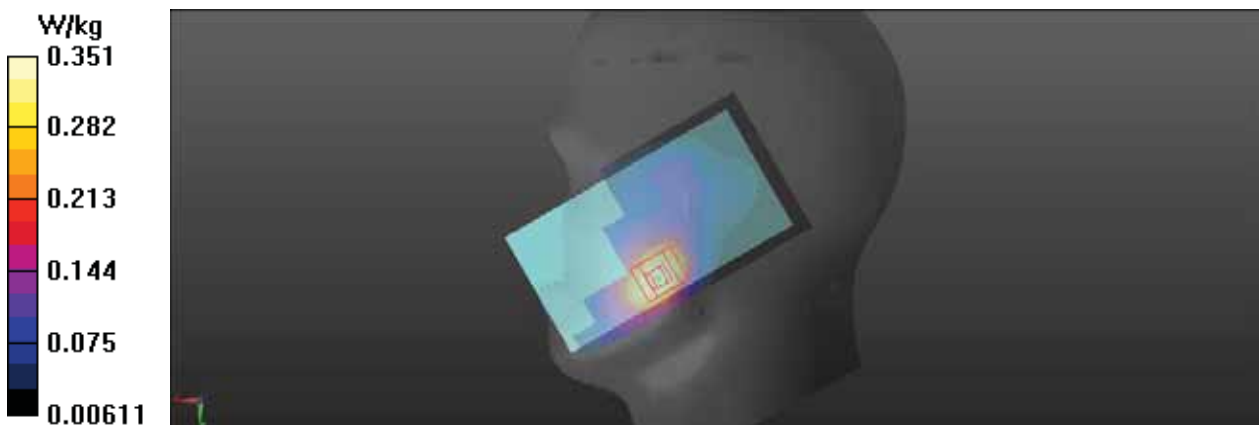

Test Laboratory: BACL SAR Testing Lab

164_WCDMA II_RMC_Body Front_Ch 9400

DUT: T5810

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch9400/Area Scan (61x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.452 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.30 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.518 W/kg

SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.184 W/kg

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 57.3%

Maximum value of SAR (measured) = 0.427 W/kg

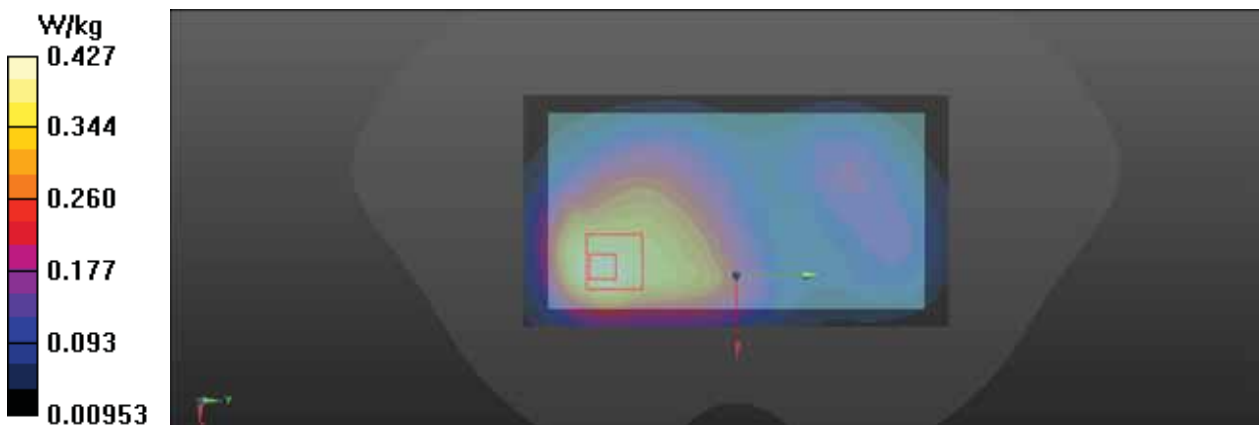

Test Laboratory: BACL SAR Testing Lab

165_WCDMA II_RMC_Body Back_Ch 9400

DUT: T5810

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch9400/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.403 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.30 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.473 W/kg

SAR(1 g) = 0.276 W/kg; SAR(10 g) = 0.168 W/kg

Smallest distance from peaks to all points 3 dB below = 19.3 mm

Ratio of SAR at M2 to SAR at M1 = 57.3%

Maximum value of SAR (measured) = 0.395 W/kg

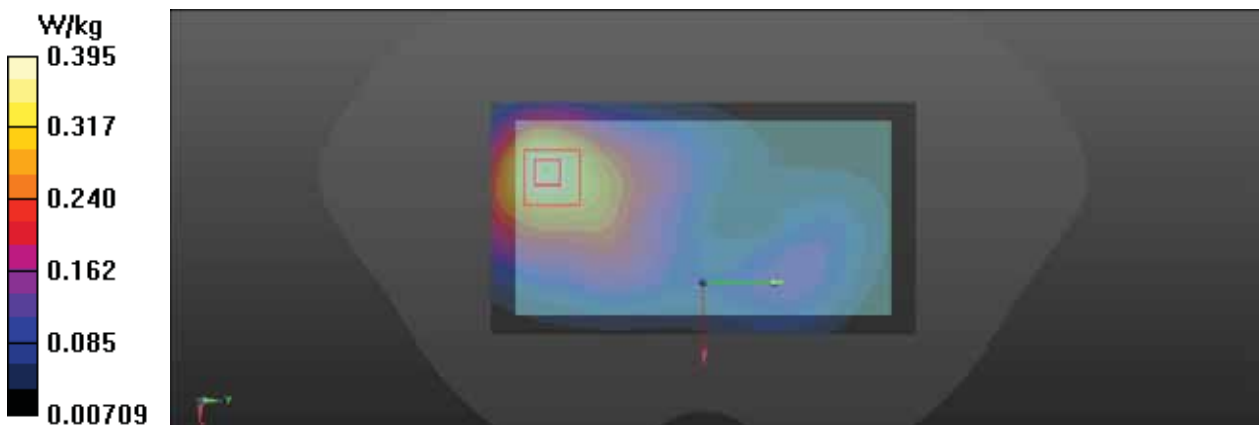

Test Laboratory: BACL SAR Testing Lab

166_WCDMA II_RMC_Body Left_Ch 9400

DUT: T5810

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch9400/Area Scan (21x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.106 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.645 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.124 W/kg

SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.044 W/kg

Smallest distance from peaks to all points 3 dB below = 21.8 mm

Ratio of SAR at M2 to SAR at M1 = 59.3%

Maximum value of SAR (measured) = 0.105 W/kg

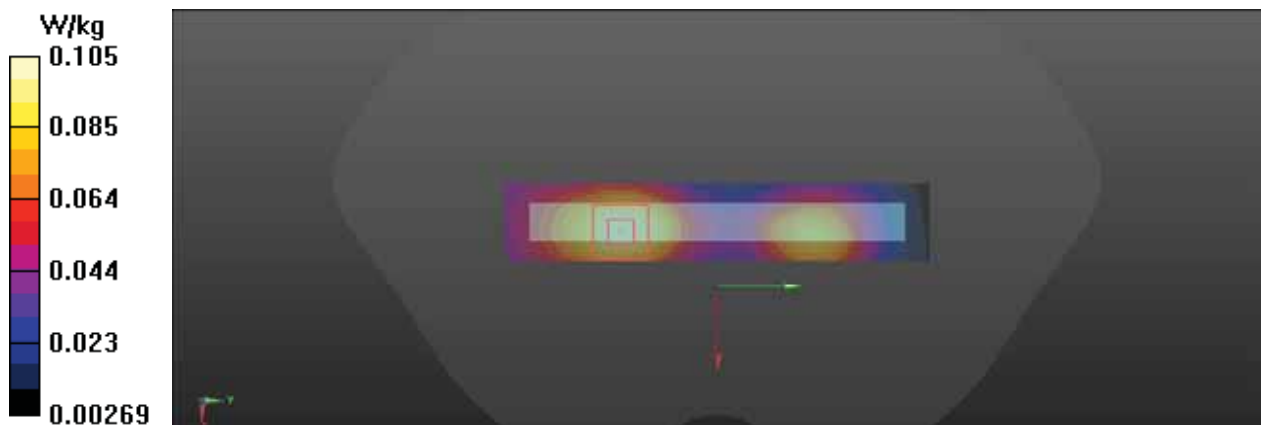

Test Laboratory: BACL SAR Testing Lab

167_WCDMA II_RMC_Body Right_Ch 9400

DUT: T5810


Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch9400/Area Scan (21x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.246 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.29 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 0.287 W/kg
SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.094 W/kg
Smallest distance from peaks to all points 3 dB below = 16.5 mm
Ratio of SAR at M2 to SAR at M1 = 56.3%
Maximum value of SAR (measured) = 0.238 W/kg

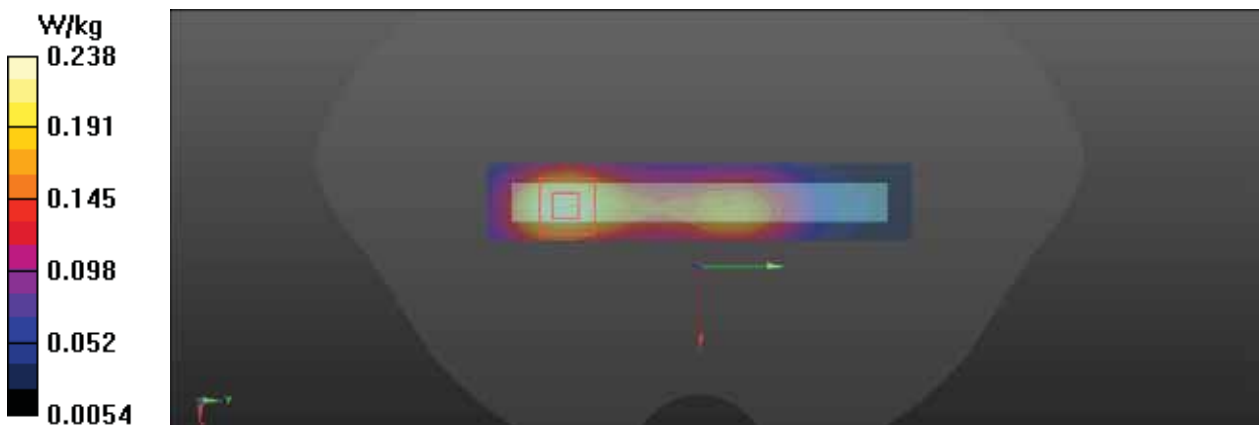

Test Laboratory: BACL SAR Testing Lab

168_WCDMA II_RMC_Body Bottom_Ch 9400

DUT: T5810

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch9400/Area Scan (21x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.315 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.86 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.383 W/kg

SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.121 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 58.2%

Maximum value of SAR (measured) = 0.321 W/kg

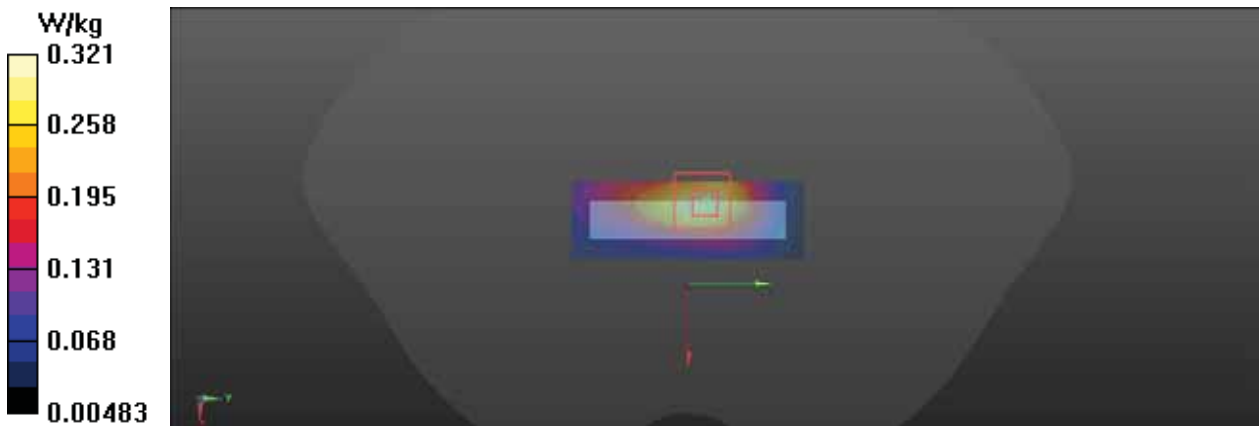

Test Laboratory: BACL SAR Testing Lab

170_WCDMA II_RMC_Body Front_Ch 9400

DUT: T5810

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch9400/Area Scan (61x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.381 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.46 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.437 W/kg

SAR(1 g) = 0.256 W/kg; SAR(10 g) = 0.160 W/kg

Smallest distance from peaks to all points 3 dB below = 16.5 mm

Ratio of SAR at M2 to SAR at M1 = 58%

Maximum value of SAR (measured) = 0.365 W/kg

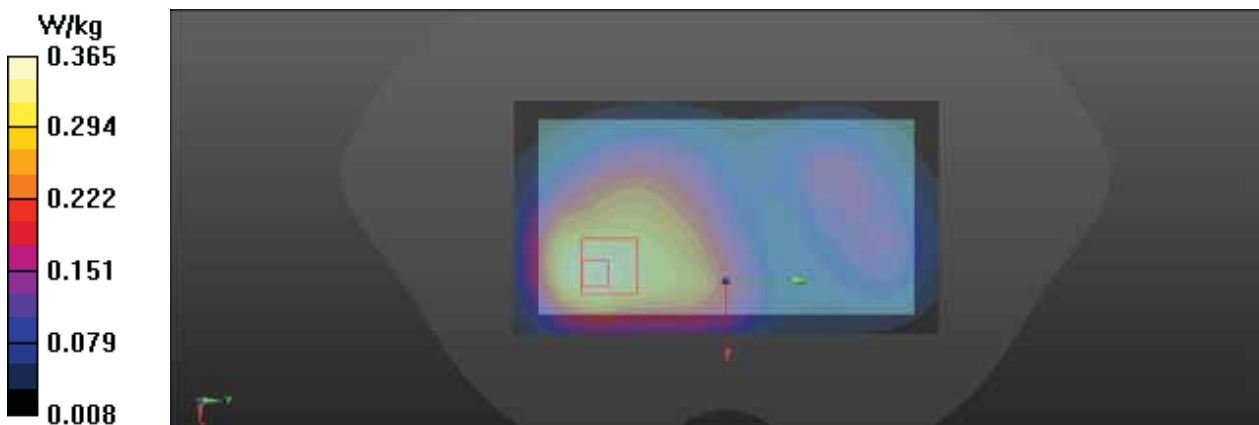

Test Laboratory: BACL SAR Testing Lab

169_WCDMA II_RMC_Body Handheld Front_Ch 9400

DUT: T5810

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch9400/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 2.76 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 37.95 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 3.42 W/kg

SAR(1 g) = 1.59 W/kg; SAR(10 g) = 0.830 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 52%

Maximum value of SAR (measured) = 2.42 W/kg



16_WCDMA V_RMC_Head Left Cheek_Ch 4182

DUT: T5810

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: HSL835 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.814$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.4 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch4182/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.215 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.96 V/m; Power Drift = -0.03 dB



Peak SAR (extrapolated) = 0.226 W/kg

SAR(1 g) = 0.178 W/kg; SAR(10 g) = 0.139 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 79.9%

Maximum value of SAR (measured) = 0.211 W/kg

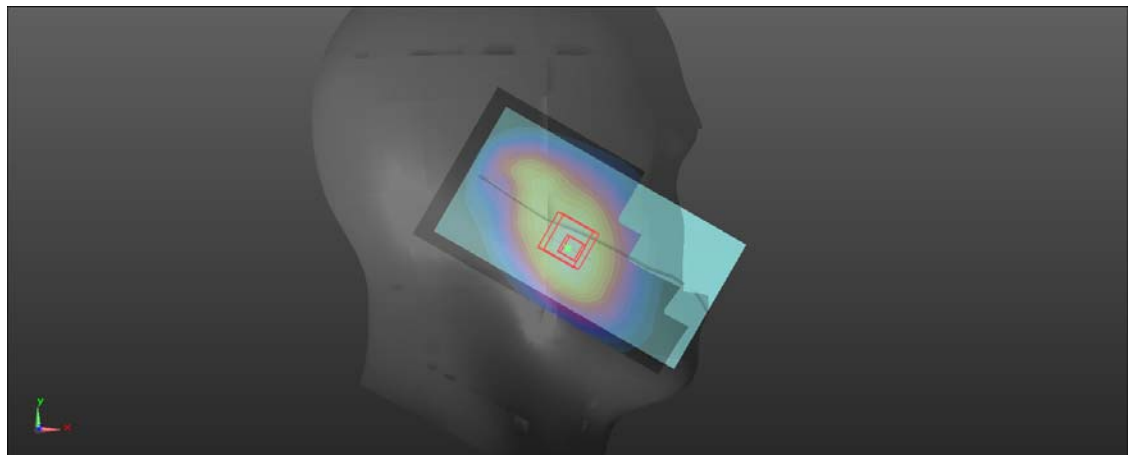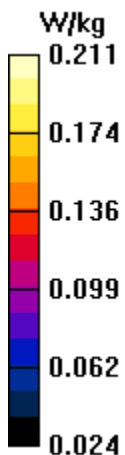

17_WCDMA V_RMC_Head Left Tilt_Ch 4182

DUT: T5810

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz;Duty Cycle: 1:1
Medium: HSL835 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.814$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.4 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch4182/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.133 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 12.11 V/m; Power Drift = 0.02 dB



Peak SAR (extrapolated) = 0.144 W/kg

SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.086 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 78.2%

Maximum value of SAR (measured) = 0.133 W/kg

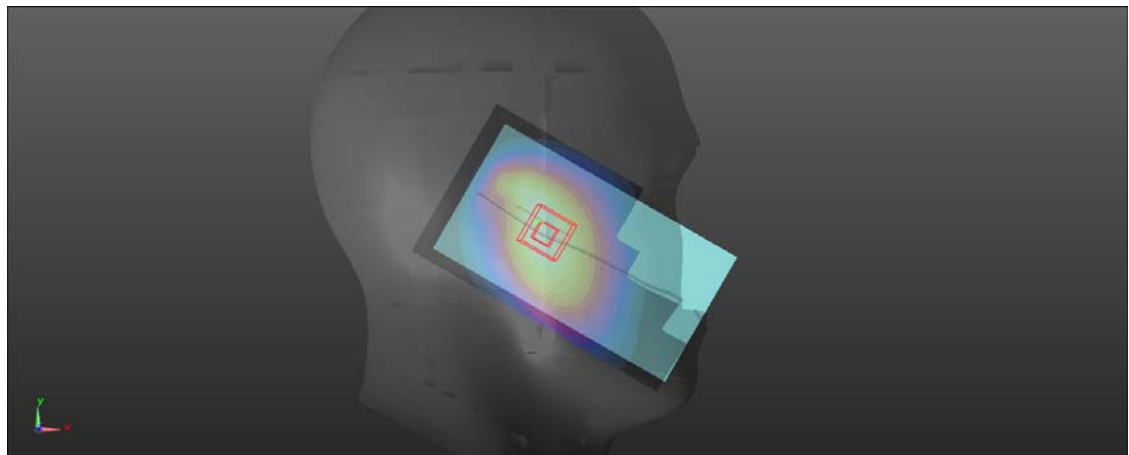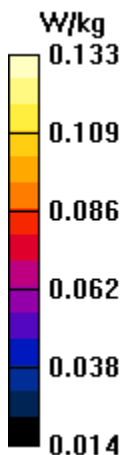

18_WCDMA V_RMC_Head Right Cheek_Ch 4182

DUT: T5810

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: HSL835 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.814$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.4 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch4182/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.203 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.99 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.216 W/kg

SAR(1 g) = 0.178 W/kg; SAR(10 g) = 0.143 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 82.5%

Maximum value of SAR (measured) = 0.203 W/kg

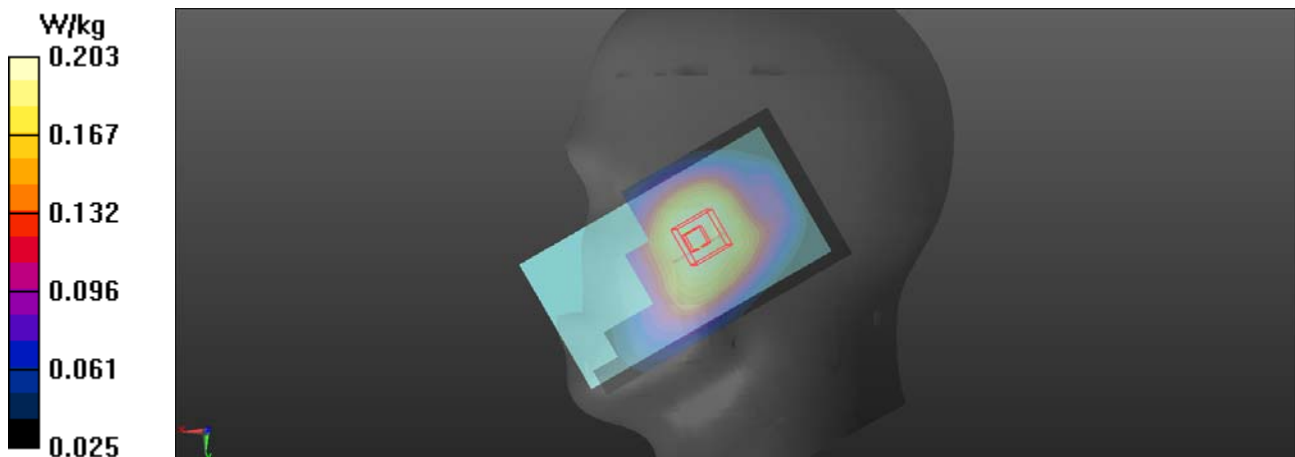

19_WCDMA V_RMC_Head Right Tilt_Ch 4182

DUT: T5810

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: HSL835 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.814$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.4 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch4182/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.143 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.48 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.154 W/kg

SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.095 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 79.5%

Maximum value of SAR (measured) = 0.144 W/kg

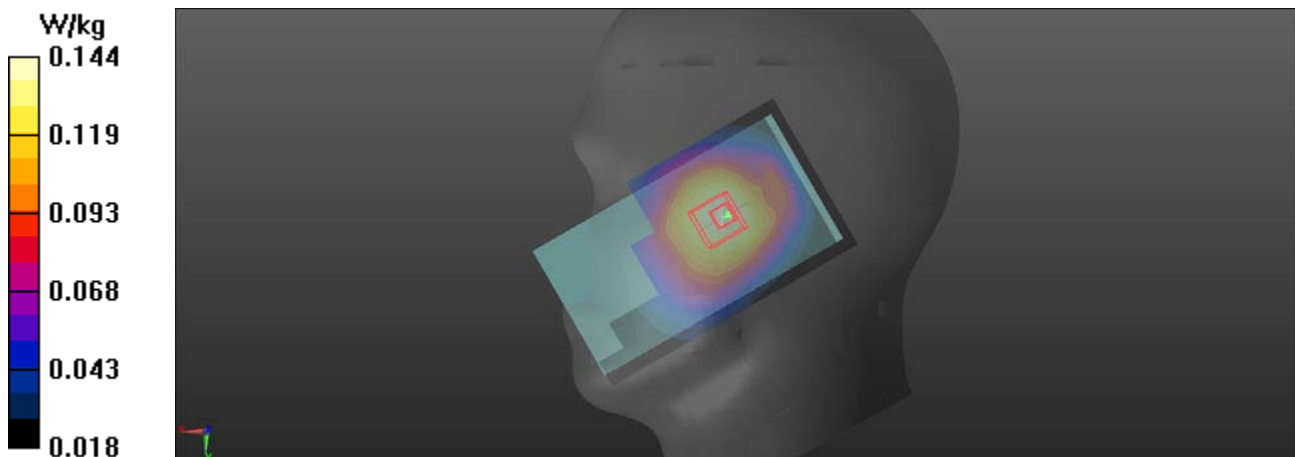

20_WCDMA V_RMC_Head Right Cheek_Ch 4182

DUT: T5810

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz;Duty Cycle: 1:1
Medium: HSL835 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.814$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.4 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch4182/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.204 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 14.89 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 0.213 W/kg

SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.141 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 81.8%

Maximum value of SAR (measured) = 0.202 W/kg

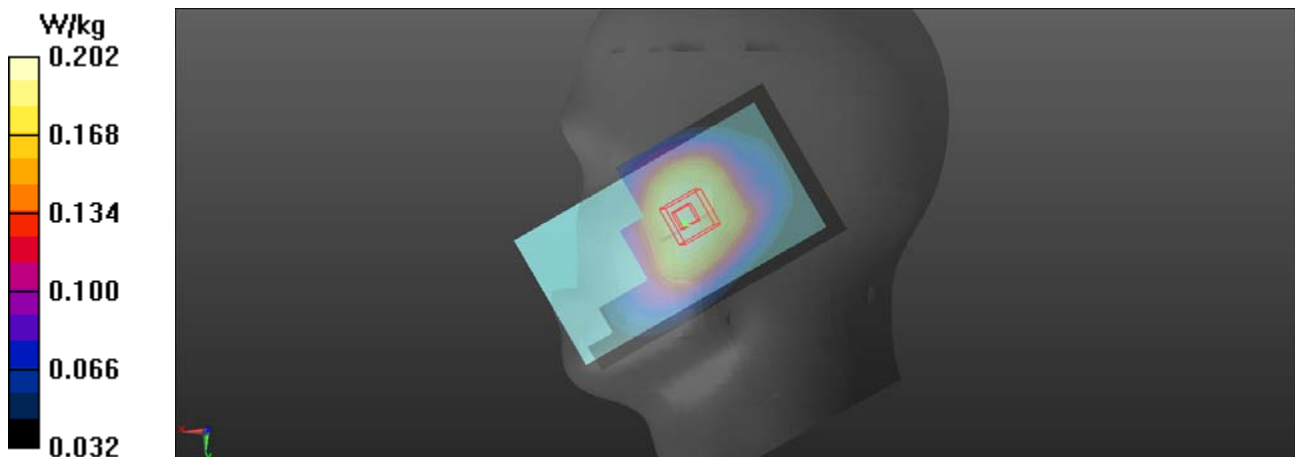

171_WCDMA V_RMC_Body Front_Ch 4182

DUT: T5810

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: HSL835 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.814$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.4 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch4182/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.261 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.93 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.287 W/kg

SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.158 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 73.6%

Maximum value of SAR (measured) = 0.258 W/kg

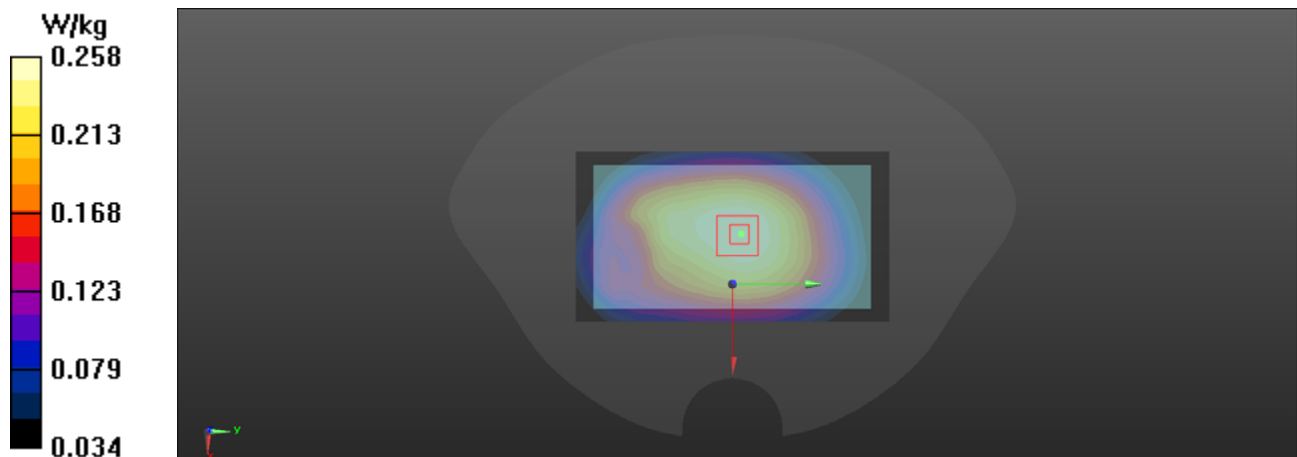

172_WCDMA V_RMC_Body Back_Ch 4182

DUT: T5810

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: HSL835 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.814$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.4 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch4182/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.277 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.82 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.303 W/kg

SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.168 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 73.8%

Maximum value of SAR (measured) = 0.274 W/kg

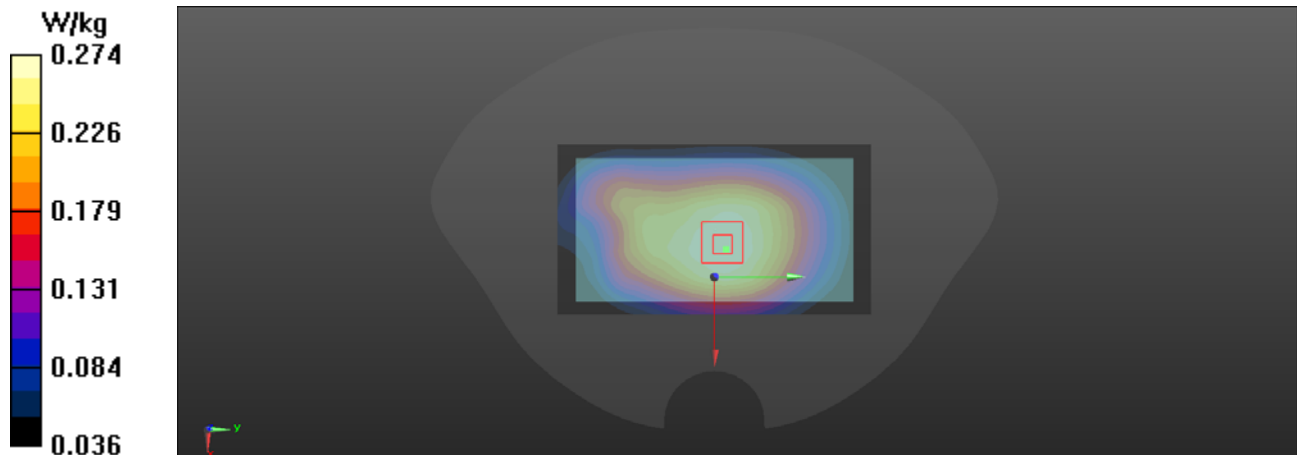

173_WCDMA V_RMC_Body Left_Ch 4182

DUT: T5810

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: HSL835 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.814$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.4 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch4182/Area Scan (21x11x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.223 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 15.97 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.257 W/kg

SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.117 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 66.3%

Maximum value of SAR (measured) = 0.222 W/kg

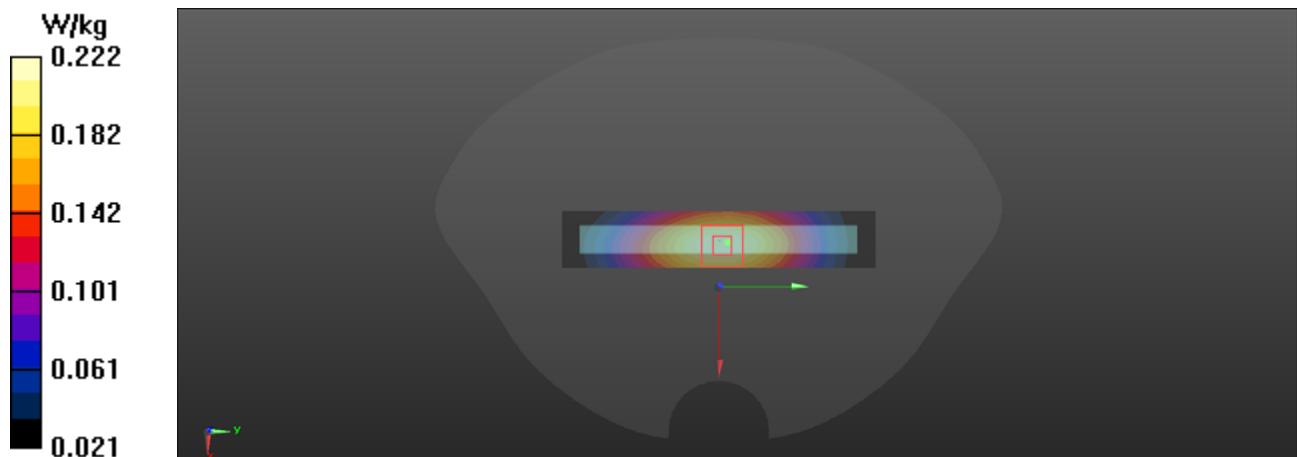

174_WCDMA V_RMCA Body Right_Ch 4182

DUT: T5810

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: HSL835 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.814$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.4 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch4182/Area Scan (21x11x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.134 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.90 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.152 W/kg

SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.070 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 67.3%

Maximum value of SAR (measured) = 0.133 W/kg

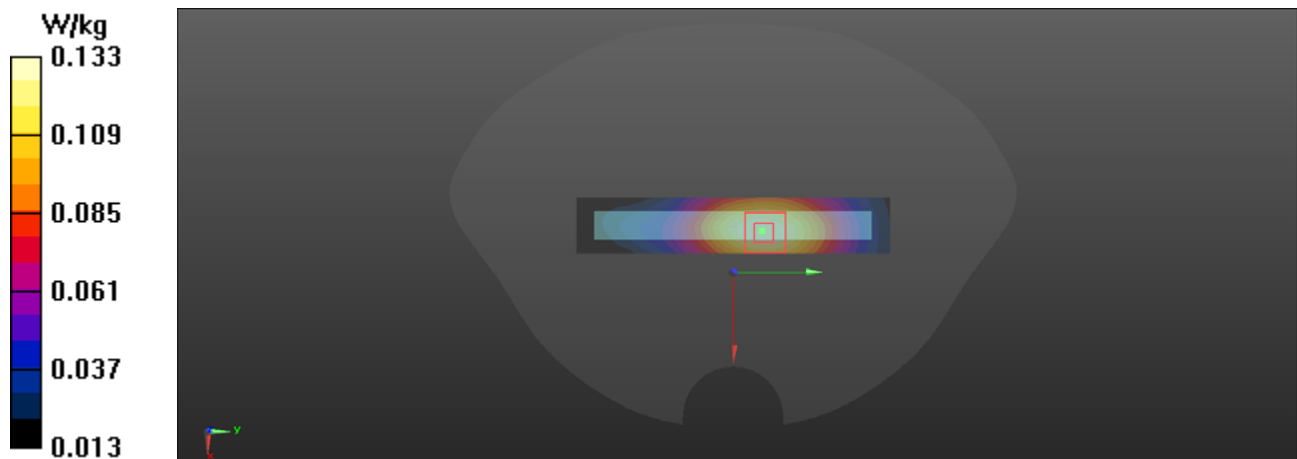

175_WCDMA V_RMC_Body Bottom_Ch 4182

DUT: T5810


Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: HSL835 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.814$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.4 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch4182/Area Scan (21x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.126 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.88 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.160 W/kg
SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.038 W/kg
Smallest distance from peaks to all points 3 dB below = 8 mm
Ratio of SAR at M2 to SAR at M1 = 47.6%
Maximum value of SAR (measured) = 0.121 W/kg

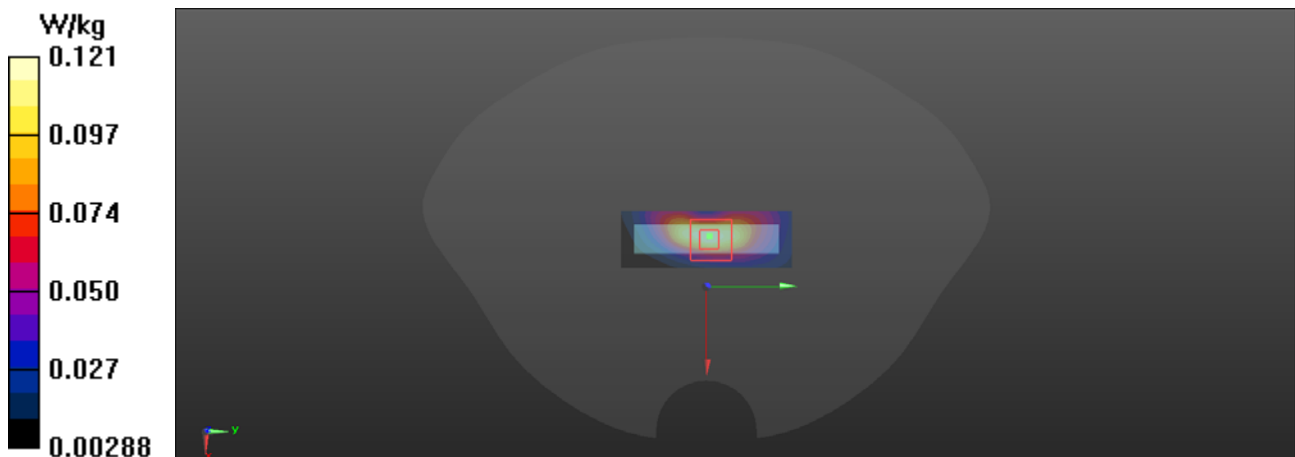

177_WCDMA V_RMC_Body Back_Ch 4182

DUT: T5810

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz;Duty Cycle: 1:1
Medium: HSL835 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.814$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.4 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch4182/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.244 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,
dz=5mm Reference Value = 16.42 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.268 W/kg

SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.149 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 74.1%

Maximum value of SAR (measured) = 0.243 W/kg

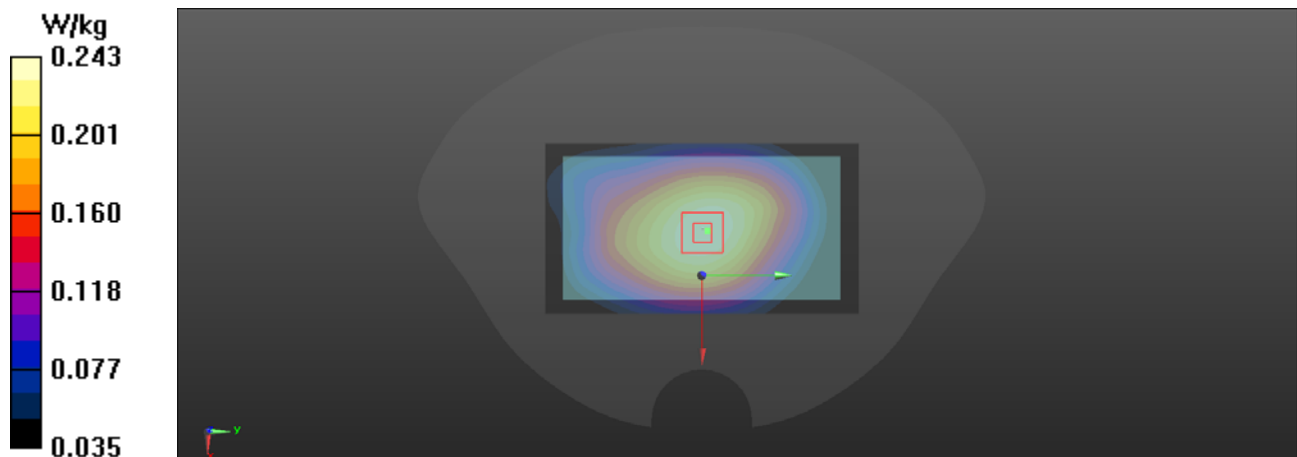

176_WCDMA V_RMC_Body Handheld Back_Ch 4182

DUT: T5810

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: HSL835 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.814$; $\rho = 1000$ kg/m³


DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.4 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch4182/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.07 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 35.50 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 1.43 W/kg
SAR(1 g) = 0.769 W/kg; SAR(10 g) = 0.463 W/kg
Smallest distance from peaks to all points 3 dB below = 14.5 mm
Ratio of SAR at M2 to SAR at M1 = 54.2%
Maximum value of SAR (measured) = 1.16 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 35.50 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 1.26 W/kg
SAR(1 g) = 0.722 W/kg; SAR(10 g) = 0.447 W/kg
Smallest distance from peaks to all points 3 dB below = 22.4 mm
Ratio of SAR at M2 to SAR at M1 = 59.4%
Maximum value of SAR (measured) = 1.08 W/kg

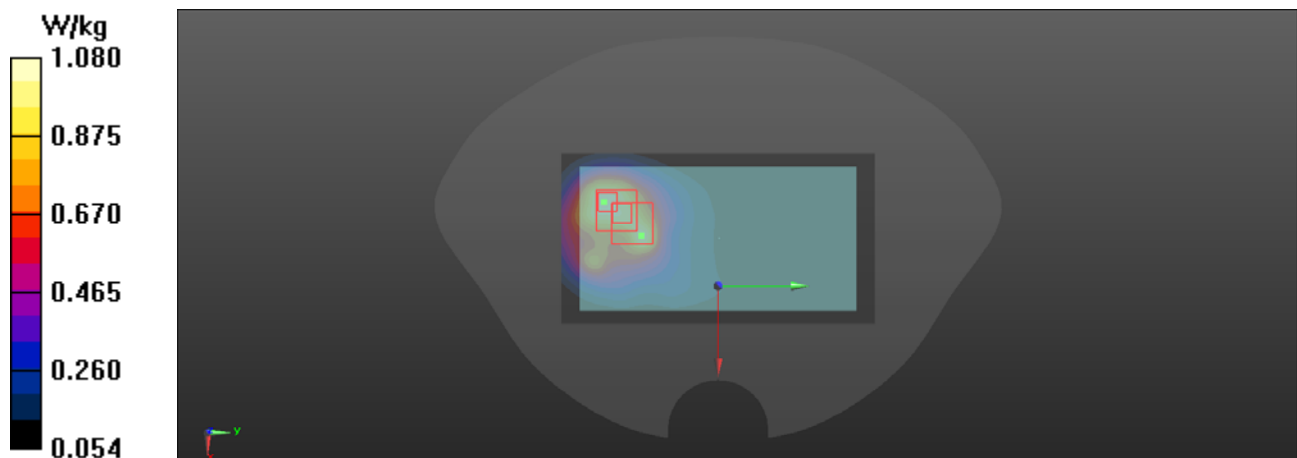

Test Laboratory:BACL.SAR TestingLab

21_LTE FDD Band 2_20M_QPSK_1RB_0Offset_Head Left Check_Ch 18900

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch18900/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.182 W/kg

Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.64 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.194 W/kg

SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.077 W/kg

Smallest distance from peaks to all points 3 dB below = 14.2 mm

Ratio of SAR at M2 to SAR at M1 = 65.1%

Maximum value of SAR (measured) = 0.168 W/kg

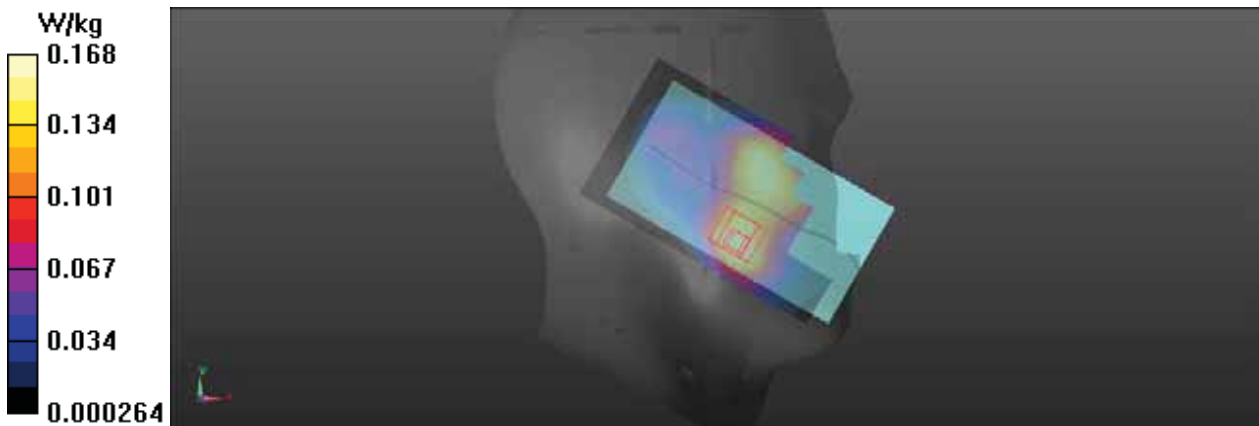

Test Laboratory:BACL.SAR TestingLab

22_LTE FDD Band 2_20M_QPSK_1RB_0Offset_Head Left Tilt_Ch 18900

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1882.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch18900/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.138 W/kg

Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.123 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.167 W/kg

SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.058 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 62%

Maximum value of SAR (measured) = 0.144 W/kg



Test Laboratory:BACL.SAR TestingLab

23_LTE FDD Band 2_20M_QPSK_1RB_0Offset_Head Right Check_Ch 18900

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch18900/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.351 W/kg

Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.87 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.391 W/kg

SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.150 W/kg

Smallest distance from peaks to all points 3 dB below = 15 mm

Ratio of SAR at M2 to SAR at M1 = 62.6%

Maximum value of SAR (measured) = 0.339 W/kg

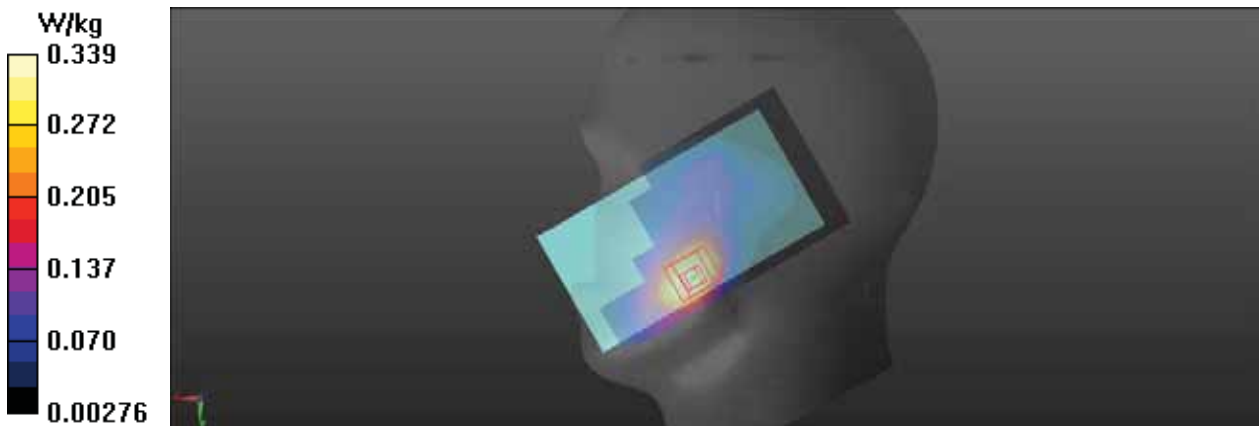

Test Laboratory:BACL.SAR TestingLab

24_LTE FDD Band 2_20M_QPSK_1RB_0Offset_Head Right Tilt_Ch 18900

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch18900/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.125 W/kg

Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.445 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.146 W/kg

SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.053 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 65.1%

Maximum value of SAR (measured) = 0.117 W/kg

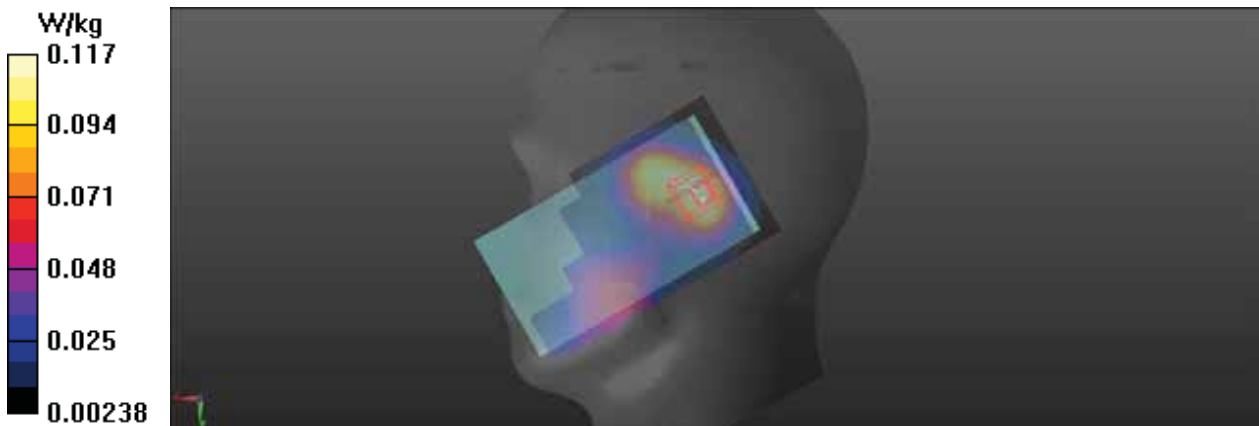

Test Laboratory: BACL SAR Testing Lab

25_LTE FDD Band 2_20M_QPSK_50%RB_0Offset_Head Left Check_Ch 18900

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch18900/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.155 W/kg

Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.994 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.169 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.067 W/kg

Smallest distance from peaks to all points 3 dB below = 15.7 mm

Ratio of SAR at M2 to SAR at M1 = 65.1%

Maximum value of SAR (measured) = 0.147 W/kg

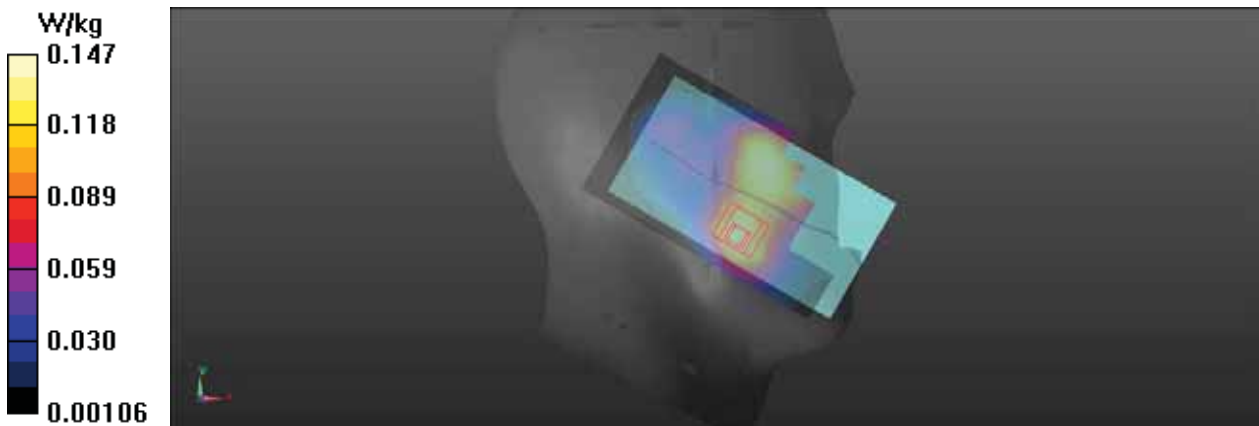

Test Laboratory: BACL SAR Testing Lab

26_LTE FDD Band 2_20M_QPSK_50%RB_0Offset_Head Left Tilt_Ch 18900

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1882.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch18900/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.121 W/kg

Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.476 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.147 W/kg

SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.050 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 61.1%

Maximum value of SAR (measured) = 0.127 W/kg



Test Laboratory:BACL.SAR TestingLab

27_LTE FDD Band 2_20M_QPSK_50%RB_0Offset_Head Right Check_Ch 18900

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch18900/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.300 W/kg

Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.88 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.331 W/kg

SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.127 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 63.5%

Maximum value of SAR (measured) = 0.289 W/kg

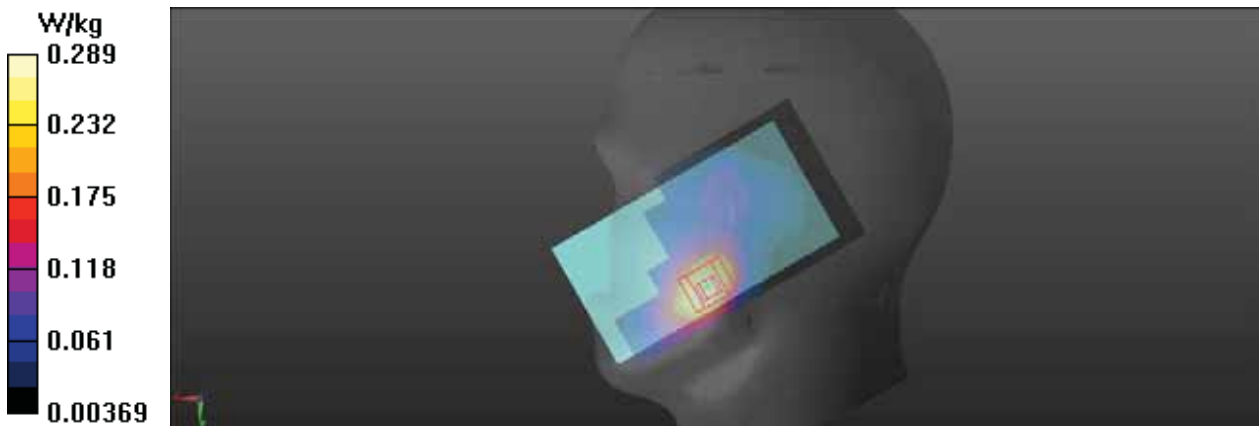

Test Laboratory:BACL.SAR TestingLab

28_LTE FDD Band 2_20M_QPSK_50%RB_0Offset_Head Right Tilt_Ch 18900

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch18900/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.108 W/kg

Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.714 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 0.127 W/kg

SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.046 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 64.6%

Maximum value of SAR (measured) = 0.102 W/kg

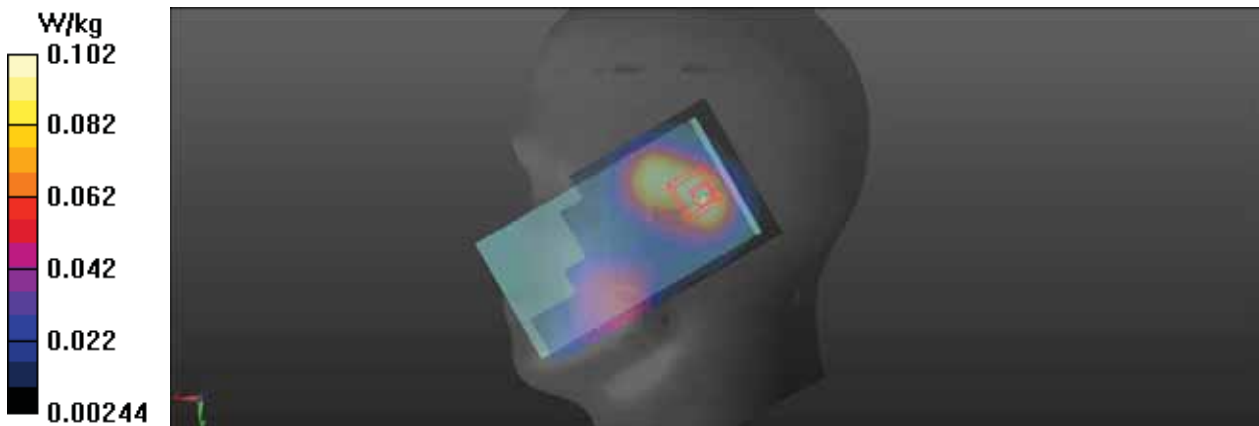

Test Laboratory:BACL.SAR TestingLab

29_LTE FDD Band 2_20M_QPSK_1RB_0Offset_Head Right Check_Ch 18900

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch18900/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.340 W/kg

Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.71 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.380 W/kg

SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.146 W/kg

Smallest distance from peaks to all points 3 dB below = 15 mm

Ratio of SAR at M2 to SAR at M1 = 62.4%

Maximum value of SAR (measured) = 0.329 W/kg



Test Laboratory: BACL SAR Testing Lab

178_LTE FDD Band 2_20M_QPSK_1RB_0Offset_Body Front_Ch 18900

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 18900/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.459 W/kg

Ch 18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.26 V/m; Power Drift = 0.04 dB



Peak SAR (extrapolated) = 0.500 W/kg

SAR(1 g) = 0.292 W/kg; SAR(10 g) = 0.182 W/kg

Smallest distance from peaks to all points 3 dB below = 19.3 mm

Ratio of SAR at M2 to SAR at M1 = 56.9%

Maximum value of SAR (measured) = 0.420 W/kg

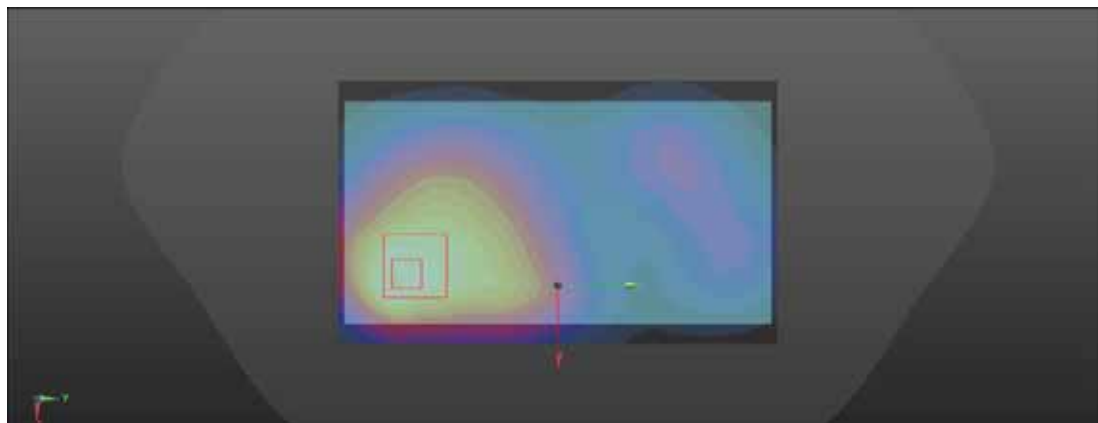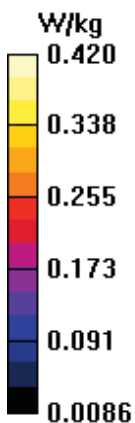

Test Laboratory: BACL SAR Testing Lab

179_LTE FDD Band 2_20M_QPSK_1RB_0Offset_Body Back_Ch 18900

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1


Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 18900/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.391 W/kg

Ch 18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.69 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.458 W/kg
SAR(1 g) = 0.266 W/kg; SAR(10 g) = 0.164 W/kg
Smallest distance from peaks to all points 3 dB below = 21.5 mm
Ratio of SAR at M2 to SAR at M1 = 57%
Maximum value of SAR (measured) = 0.384 W/kg

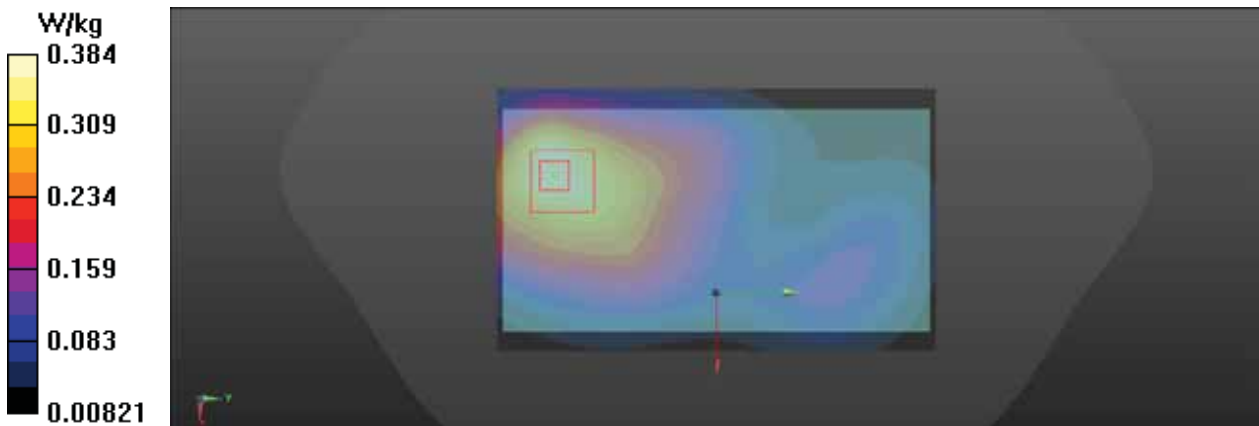

Test Laboratory: BACL SAR Testing Lab

180_LTE FDD Band 2_20M_QPSK_1RB_0Offset_Body Left_Ch 18900

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 18900/Area Scan (21x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0902 W/kg

Ch 18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.725 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.110 W/kg
SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.038 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 56.6%
Maximum value of SAR (measured) = 0.0917 W/kg

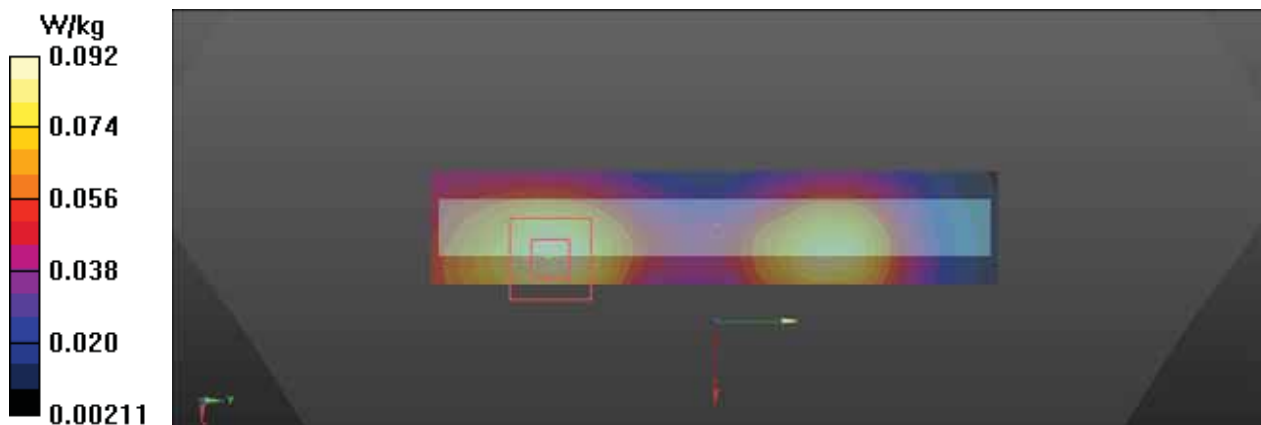

Test Laboratory: BACL SAR Testing Lab

181_LTE FDD Band 2_20M_QPSK_1RB_0Offset_Body Right_Ch 18900

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1


Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 18900/Area Scan (21x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.303 W/kg

Ch 18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.91 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.352 W/kg
SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.108 W/kg
Smallest distance from peaks to all points 3 dB below = 13.7 mm
Ratio of SAR at M2 to SAR at M1 = 54.6%
Maximum value of SAR (measured) = 0.283 W/kg

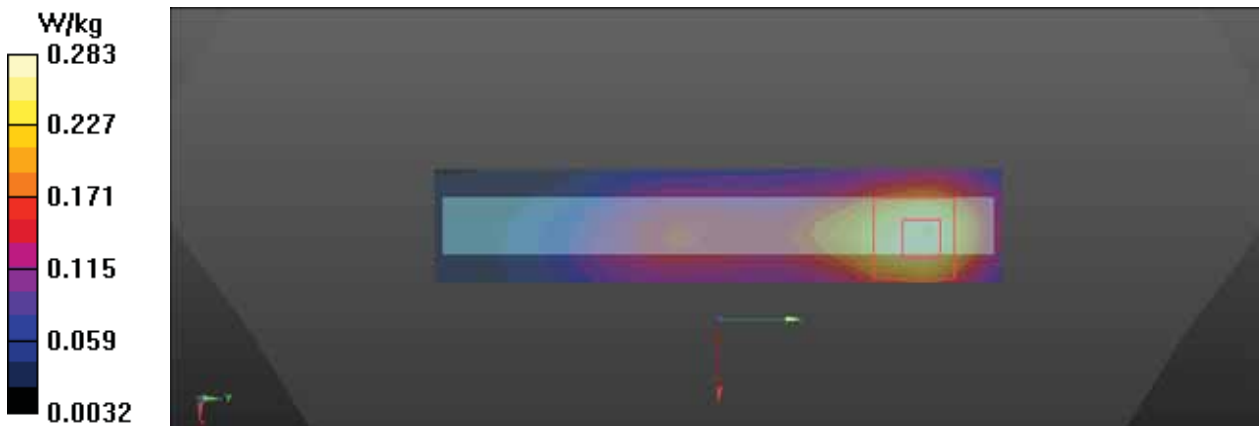

Test Laboratory: BACL SAR Testing Lab

182_LTE FDD Band 2_20M_QPSK_1RB_0Offset_Body Bottom_Ch 18900

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1


Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 18900/Area Scan (21x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.313 W/kg

Ch 18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.26 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 0.368 W/kg
SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.114 W/kg
Smallest distance from peaks to all points 3 dB below = 11.6 mm
Ratio of SAR at M2 to SAR at M1 = 56.3%
Maximum value of SAR (measured) = 0.306 W/kg

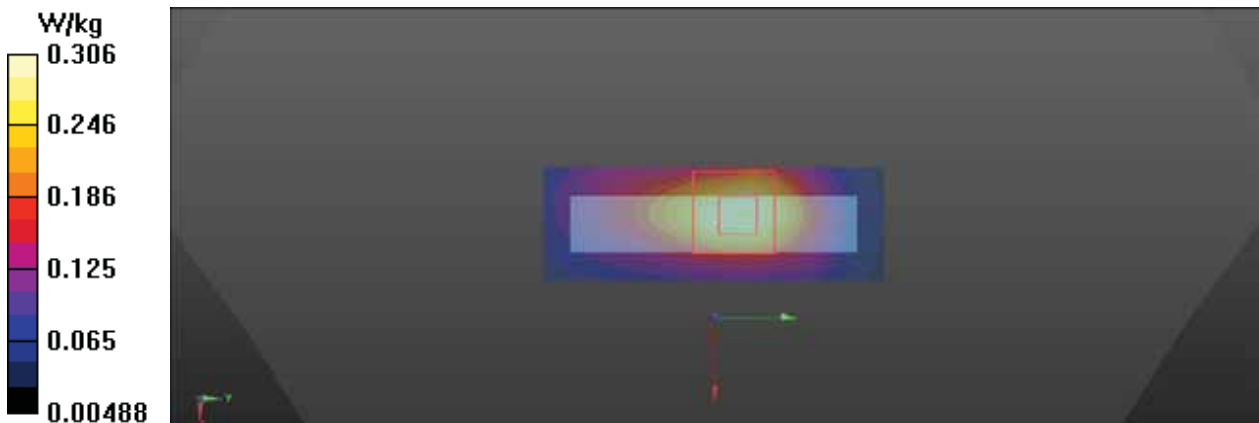

Test Laboratory: BACL SAR Testing Lab

183_LTE FDD Band 2_20M_QPSK_50%RB_0Offset_Body Front_Ch 18900

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1


Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 18900/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.394 W/kg

Ch 18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.14 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.440 W/kg
SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.158 W/kg
Smallest distance from peaks to all points 3 dB below = 19.3 mm
Ratio of SAR at M2 to SAR at M1 = 56.3%
Maximum value of SAR (measured) = 0.368 W/kg

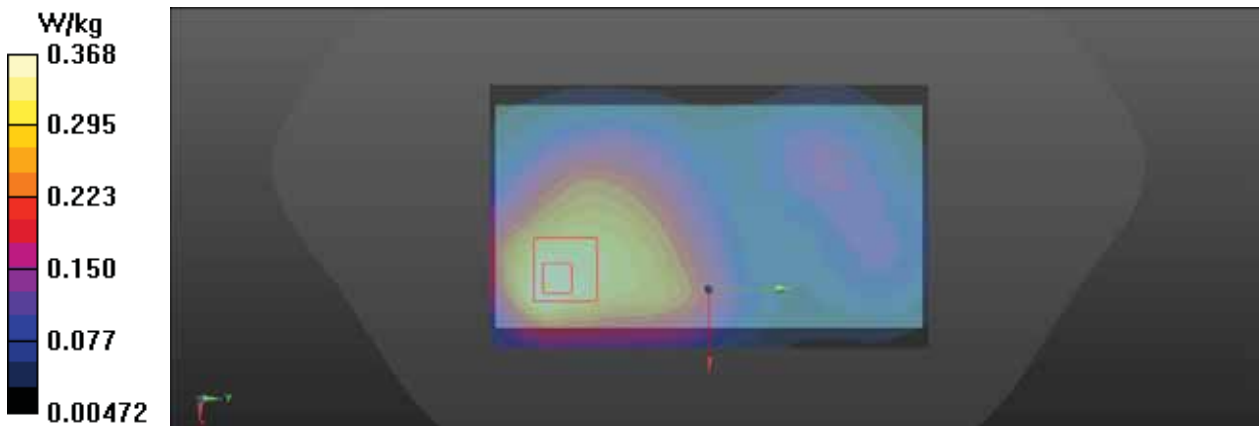

Test Laboratory: BACL SAR Testing Lab

184_LTE FDD Band 2_20M_QPSK_50%RB_0Offset_Body Back_Ch 18900

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 18900/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.334 W/kg

Ch 18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.36 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.393 W/kg

SAR(1 g) = 0.228 W/kg; SAR(10 g) = 0.139 W/kg

Smallest distance from peaks to all points 3 dB below = 19.5 mm

Ratio of SAR at M2 to SAR at M1 = 57.4%

Maximum value of SAR (measured) = 0.327 W/kg

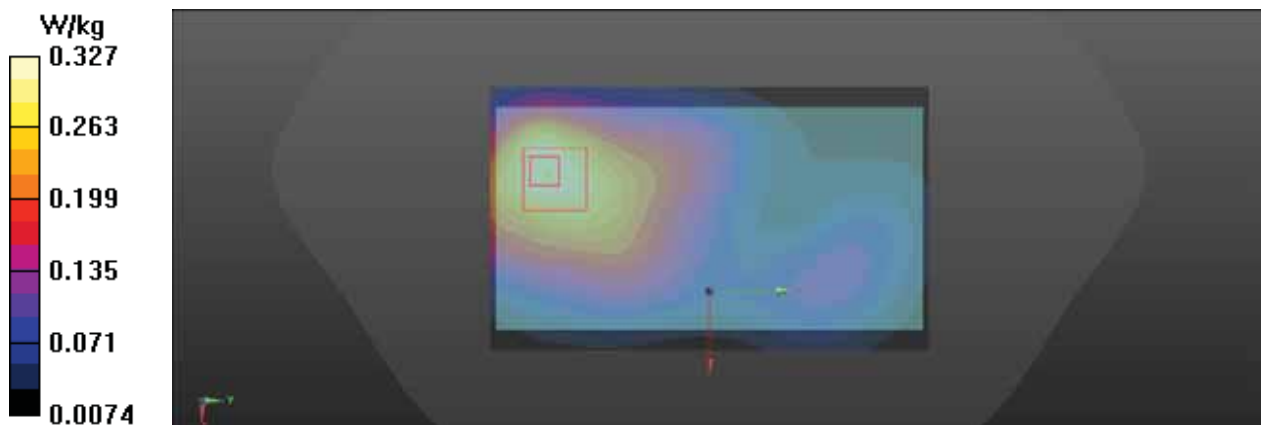

Test Laboratory: BACL SAR Testing Lab

185_LTE FDD Band 2_20M_QPSK_50%RB_0Offset_Body Left_Ch 18900

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 18900/Area Scan (21x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0838 W/kg

Ch 18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.425 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 0.100 W/kg

SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.034 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 56.1%

Maximum value of SAR (measured) = 0.0830 W/kg

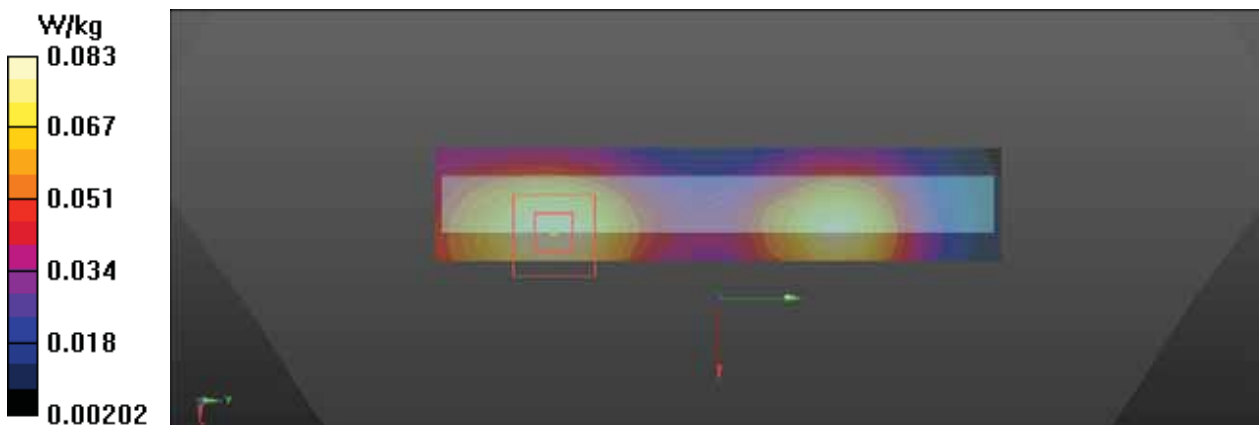

Test Laboratory: BACL SAR Testing Lab

186_LTE FDD Band 2_20M_QPSK_50%RB_0Offset_Body Right_Ch 18900

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1


Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 18900/Area Scan (21x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.265 W/kg

Ch 18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.00 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.308 W/kg
SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.095 W/kg
Smallest distance from peaks to all points 3 dB below = 13.7 mm
Ratio of SAR at M2 to SAR at M1 = 54.5%
Maximum value of SAR (measured) = 0.249 W/kg

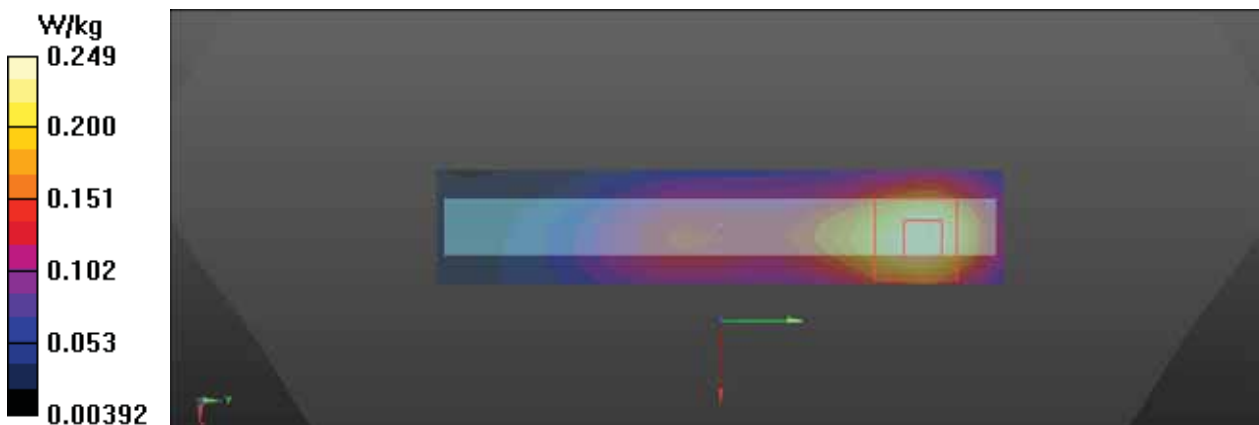

Test Laboratory: BACL SAR Testing Lab

187_LTE FDD Band 2_20M_QPSK_50%RB_0Offset_Body Bottom_Ch 18900

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 18900/Area Scan (21x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.277 W/kg

Ch 18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.42 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.329 W/kg
SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.101 W/kg
Smallest distance from peaks to all points 3 dB below = 12.8 mm
Ratio of SAR at M2 to SAR at M1 = 56.9%
Maximum value of SAR (measured) = 0.273 W/kg

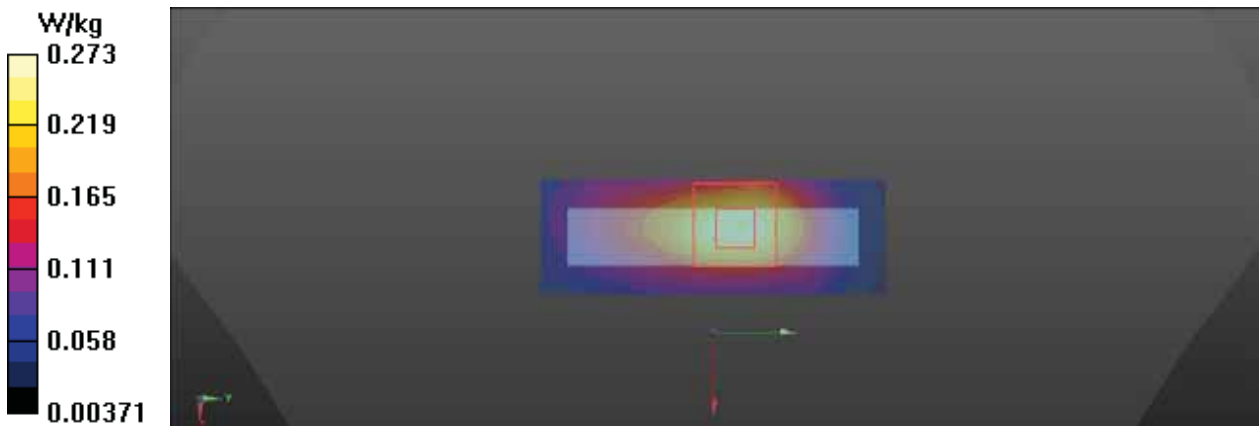

Test Laboratory:BACL.SAR TestingLab

189_LTE FDD Band 2_20M_QPSK_1RB_0Offset_Body Front_Ch 18900

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1


Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch 18900/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.424 W/kg

Ch 18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.87 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.470 W/kg
SAR(1 g) = 0.277 W/kg; SAR(10 g) = 0.174 W/kg
Smallest distance from peaks to all points 3 dB below = 19.3 mm
Ratio of SAR at M2 to SAR at M1 = 57.8%
Maximum value of SAR (measured) = 0.395 W/kg

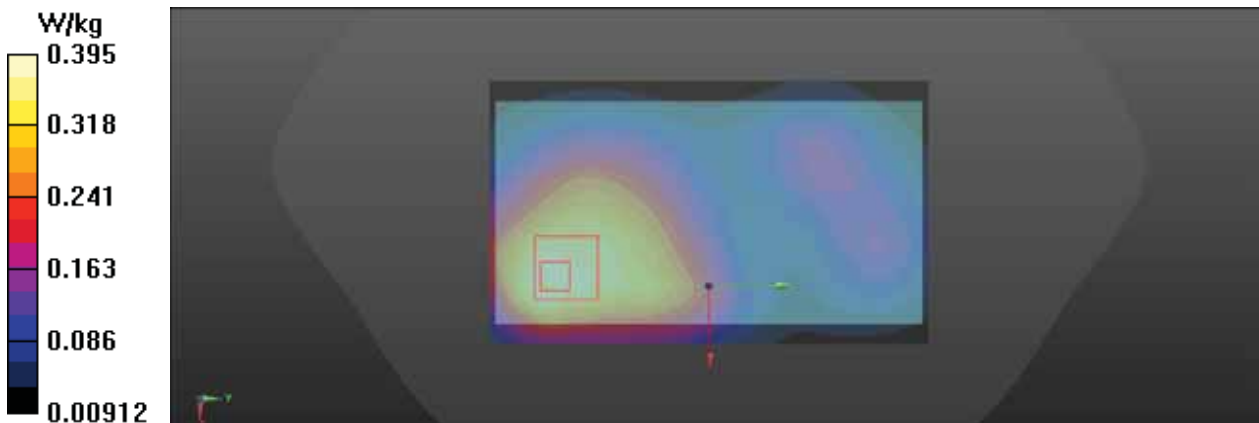

Test Laboratory:BACL.SAR TestingLab

188_LTE FDD Band 2_20M_QPSK_1RB_0Offset_Body Handheld Front_Ch 18900

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1880 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch 18900/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 3.02 W/kg

Ch 18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 29.81 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 3.26 W/kg
SAR(1 g) = 1.52 W/kg; SAR(10 g) = 0.793 W/kg
Smallest distance from peaks to all points 3 dB below = 8.6 mm
Ratio of SAR at M2 to SAR at M1 = 51.9%
Maximum value of SAR (measured) = 2.33 W/kg

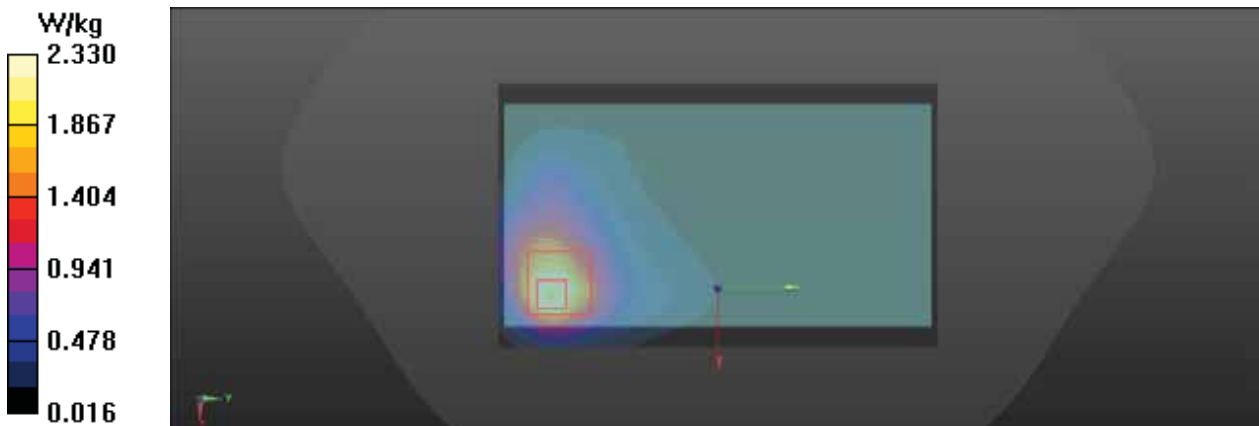

Test Laboratory:BACL.SAR TestingLab

30_LTE FDD Band 4_20M_QPSK_1RB_0Offset_Head Left Check_Ch 20300

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch20300/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.224 W/kg

Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.72 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 0.240 W/kg
SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.106 W/kg
Smallest distance from peaks to all points 3 dB below = 21.6 mm
Ratio of SAR at M2 to SAR at M1 = 67.8%
Maximum value of SAR (measured) = 0.213 W/kg

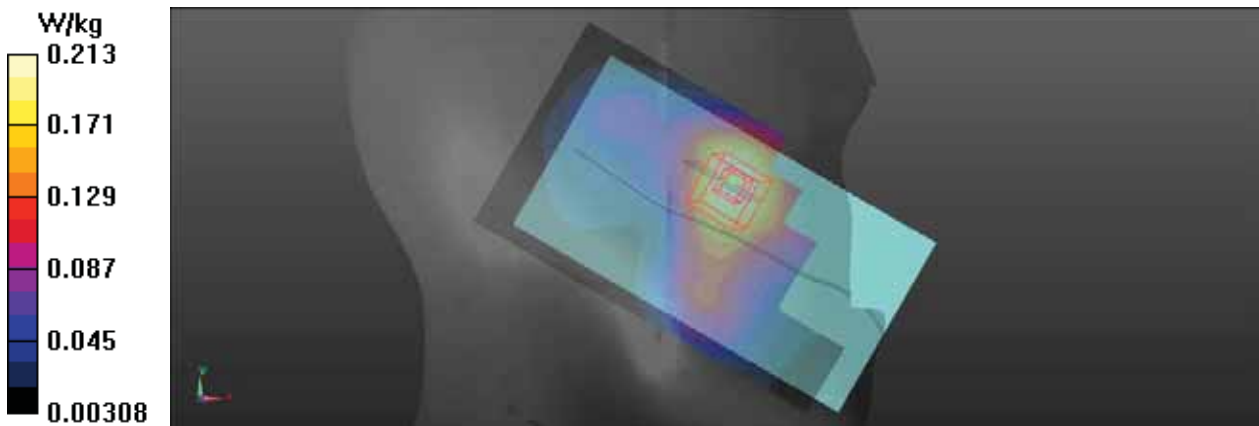

Test Laboratory:BACL.SAR TestingLab

31_LTE FDD Band 4_20M_QPSK_1RB_0Offset_Head Left Tilt_Ch 20300

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch20300/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.130 W/kg

Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.152 V/m; Power Drift = 0.01 dB



Peak SAR (extrapolated) = 0.153 W/kg

SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.052 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 59.8%

Maximum value of SAR (measured) = 0.129 W/kg

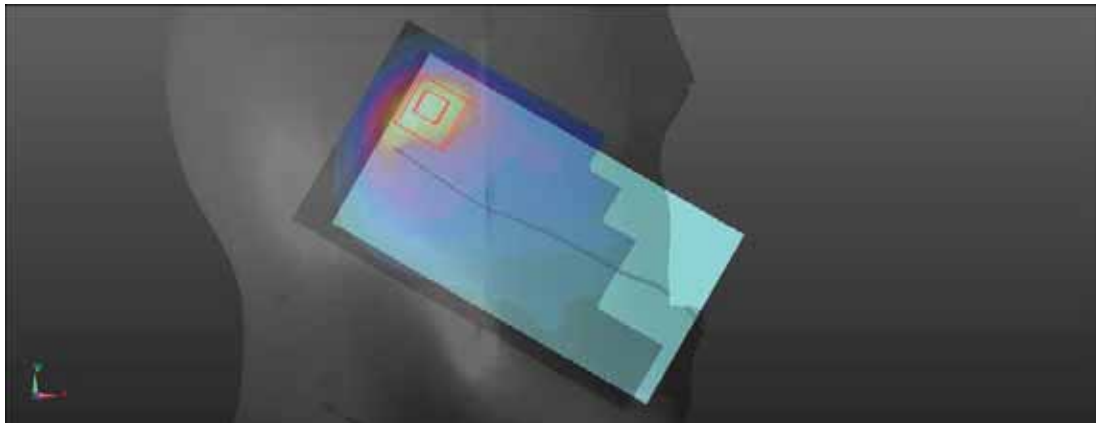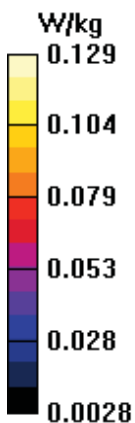

Test Laboratory: BACL SAR Testing Lab

32_LTE FDD Band 4_20M_QPSK_1RB_0Offset_Head Right Cheek_Ch 20300

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20300/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.384 W/kg

Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.85 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.430 W/kg

SAR(1 g) = 0.269 W/kg; SAR(10 g) = 0.168 W/kg

Smallest distance from peaks to all points 3 dB below = 14.1 mm

Ratio of SAR at M2 to SAR at M1 = 61.9%

Maximum value of SAR (measured) = 0.370 W/kg

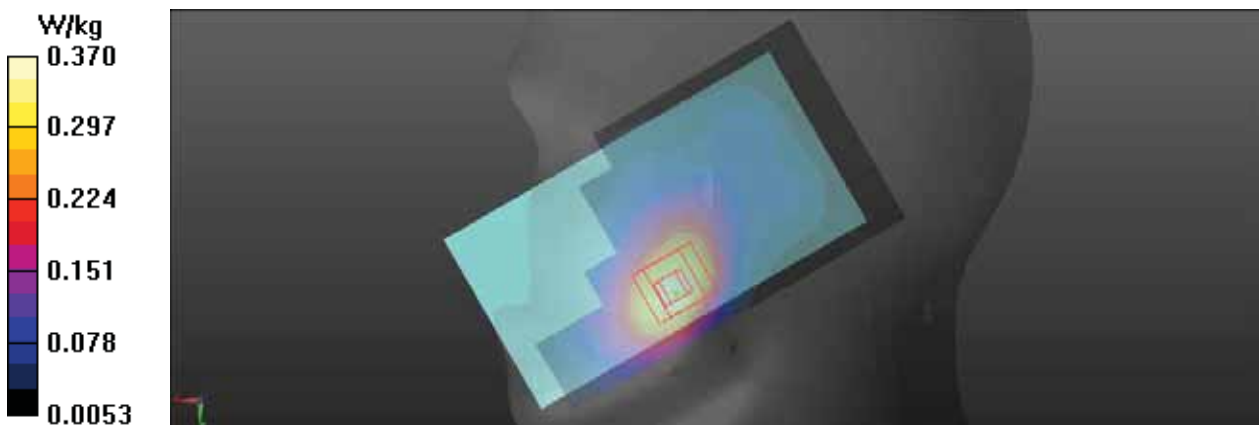

Test Laboratory:BACL.SAR TestingLab

33_LTE FDD Band 4_20M_QPSK_1RB_0Offset_Head Right Tilt_Ch 20300

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch20300/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.108 W/kg

Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.547 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.125 W/kg
SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.048 W/kg
Smallest distance from peaks to all points 3 dB below = 13.7 mm
Ratio of SAR at M2 to SAR at M1 = 62.4%
Maximum value of SAR (measured) = 0.105 W/kg

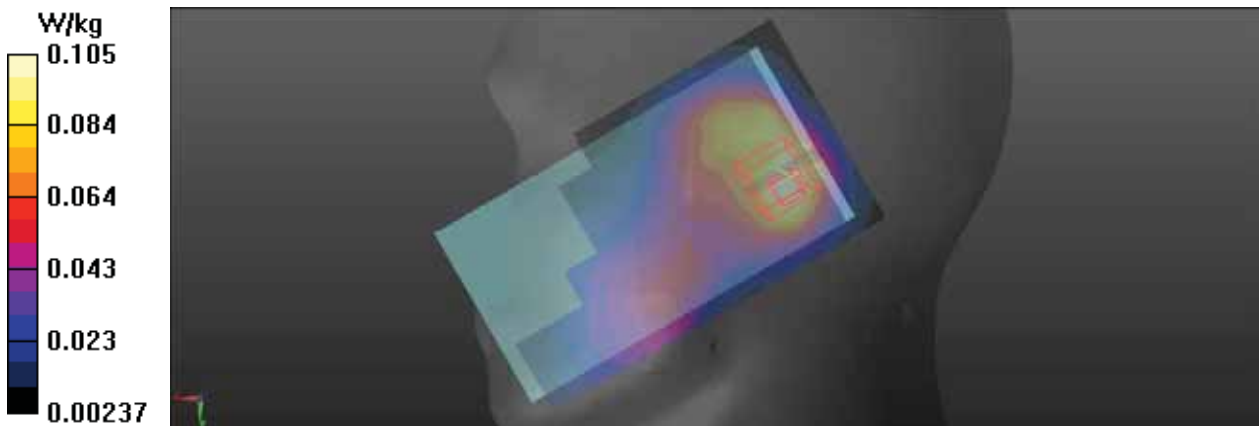

Test Laboratory: BACL SAR Testing Lab

34_LTE FDD Band 4_20M_QPSK_50%RB_0Offset_Head Left Check_Ch 20300

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20300/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.171 W/kg

Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.30 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.190 W/kg

SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.084 W/kg

Smallest distance from peaks to all points 3 dB below = 19.3 mm

Ratio of SAR at M2 to SAR at M1 = 66.6%

Maximum value of SAR (measured) = 0.166 W/kg

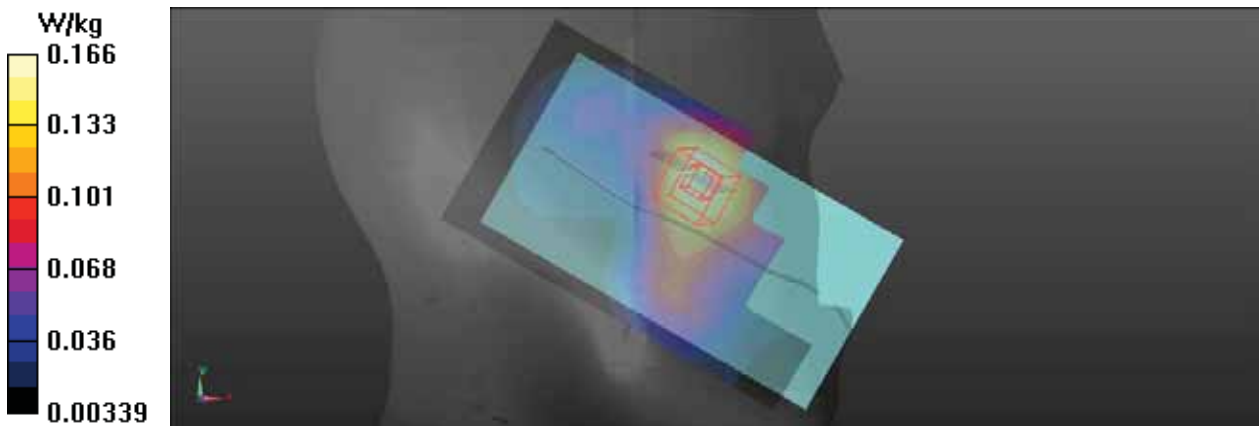

Test Laboratory: BACL SAR Testing Lab

35_LTE FDD Band 4_20M_QPSK_50%RB_0Offset_Head Left Tilt_Ch 20300

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20300/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.103 W/kg

Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.196 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.121 W/kg
SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.041 W/kg
Smallest distance from peaks to all points 3 dB below = 11.3 mm
Ratio of SAR at M2 to SAR at M1 = 60.2%
Maximum value of SAR (measured) = 0.103 W/kg

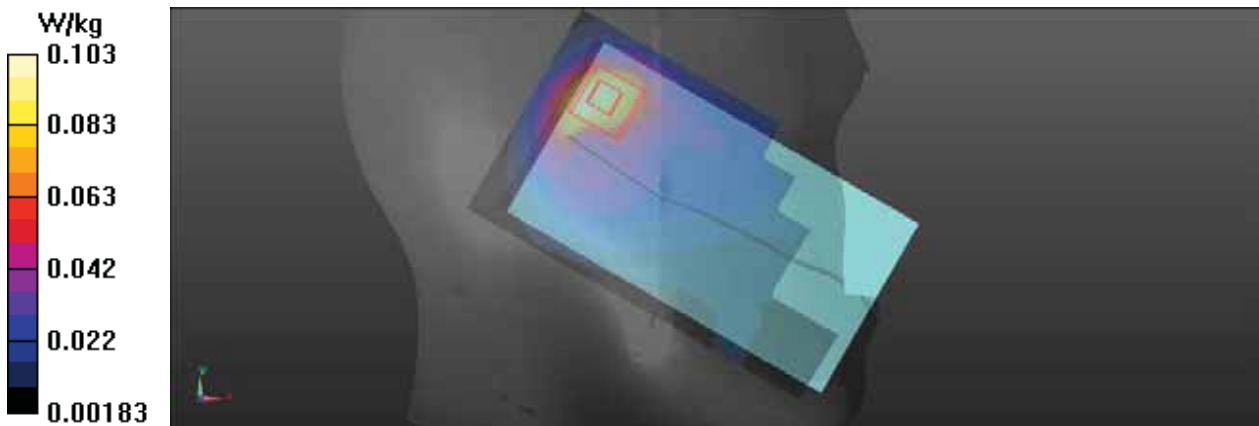

Test Laboratory: BACL SAR Testing Lab

36_LTE FDD Band 4_20M_QPSK_50%RB_0Offset_Head Right Cheek_Ch 20300

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20300/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.255 W/kg

Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.35 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.283 W/kg

SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.115 W/kg

Smallest distance from peaks to all points 3 dB below = 14.9 mm

Ratio of SAR at M2 to SAR at M1 = 64.6%

Maximum value of SAR (measured) = 0.248 W/kg

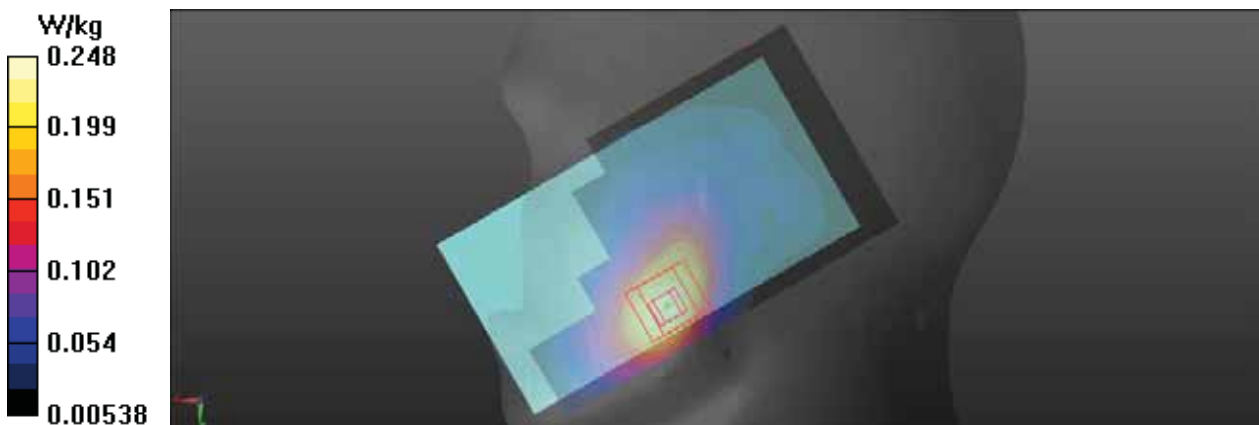

Test Laboratory: BACL SAR Testing Lab

37_LTE FDD Band 4_20M_QPSK_50%RB_0Offset_Head Right Tilt_Ch 20300

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20300/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0855 W/kg

Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.585 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.0980 W/kg

SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.038 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 67.2%

Maximum value of SAR (measured) = 0.0811 W/kg

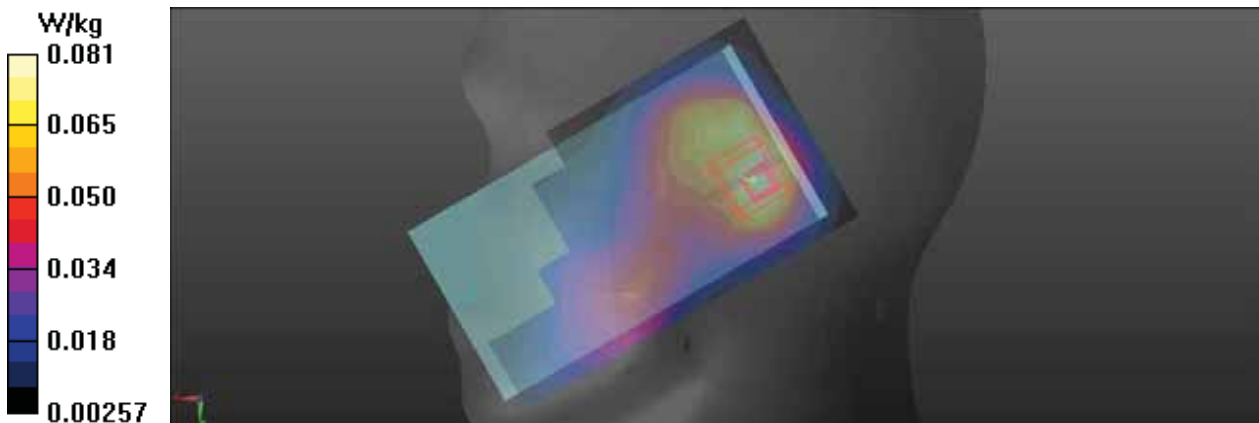

Test Laboratory: BACL SAR Testing Lab

38_LTE FDD Band 4_20M_QPSK_1RB_0Offset_Head Right Cheek_Ch 20300

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20300/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.319 W/kg

Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.99 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 0.354 W/kg
SAR(1 g) = 0.228 W/kg; SAR(10 g) = 0.145 W/kg
Smallest distance from peaks to all points 3 dB below = 15.5 mm
Ratio of SAR at M2 to SAR at M1 = 64.9%
Maximum value of SAR (measured) = 0.311 W/kg

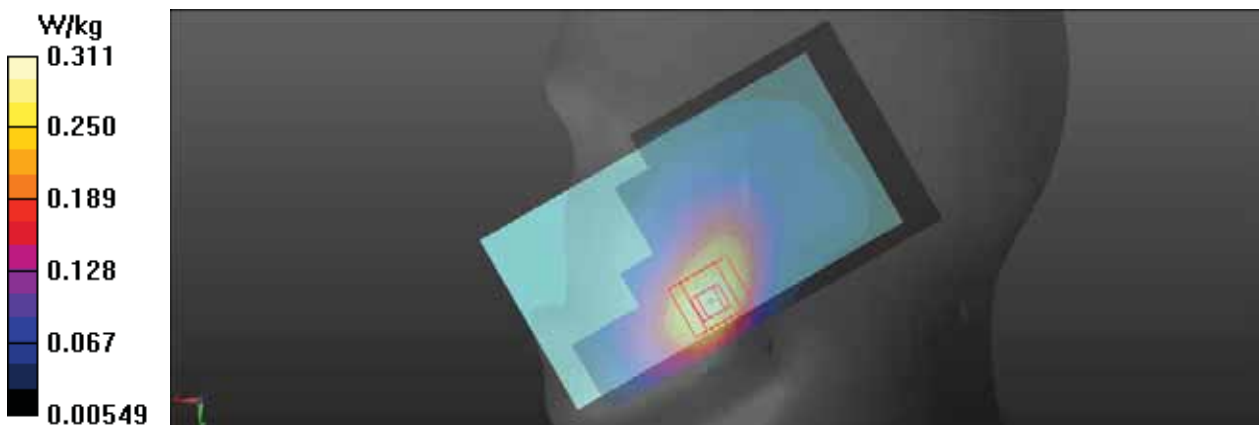

Test Laboratory: BACL SAR Testing Lab

190_LTE FDD Band 4_20M_QPSK_1RB_0Offset_Body Front_Ch 20300

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20300/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.417 W/kg

Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.17 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.460 W/kg

SAR(1 g) = 0.279 W/kg; SAR(10 g) = 0.173 W/kg

Smallest distance from peaks to all points 3 dB below = 19.3 mm

Ratio of SAR at M2 to SAR at M1 = 60%

Maximum value of SAR (measured) = 0.393 W/kg

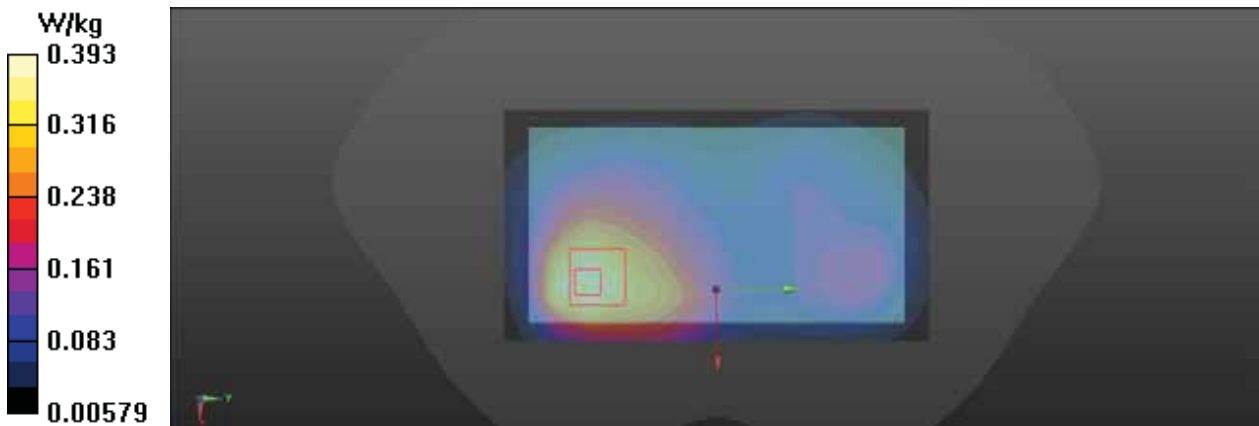

Test Laboratory: BACL SAR Testing Lab

191_LTE FDD Band 4_20M_QPSK_1RB_0Offset_Body Back_Ch 20300

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20300/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.598 W/kg

ConfiguratioCh20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.99 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.689 W/kg

SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.260 W/kg

Smallest distance from peaks to all points 3 dB below = 26.2 mm

Ratio of SAR at M2 to SAR at M1 = 59.6%

Maximum value of SAR (measured) = 0.580 W/kg

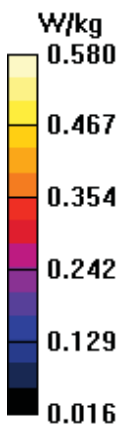

Test Laboratory: BACL SAR Testing Lab

192_LTE FDD Band 4_20M_QPSK_1RB_0Offset_Body Left_Ch 20300

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20300/Area Scan (21x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0696 W/kg

Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.241 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.0820 W/kg

SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.030 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 58.8%

Maximum value of SAR (measured) = 0.0687 W/kg

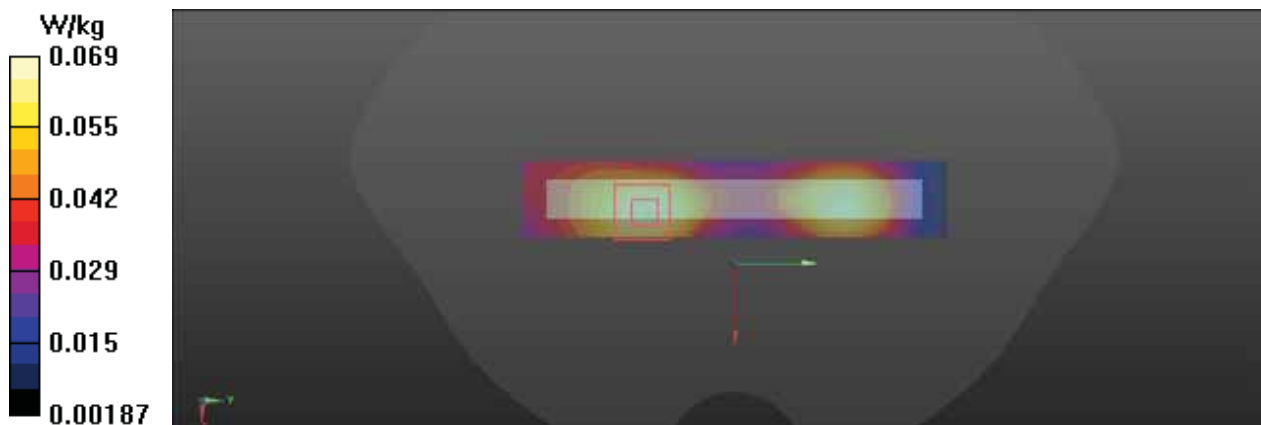

Test Laboratory: BACL SAR Testing Lab

193_LTE FDD Band 4_20M_QPSK_1RB_0Offset_Body Right_Ch 20393

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20300/Area Scan (21x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.424 W/kg

Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.31 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.473 W/kg

SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.162 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 57.4%

Maximum value of SAR (measured) = 0.396 W/kg

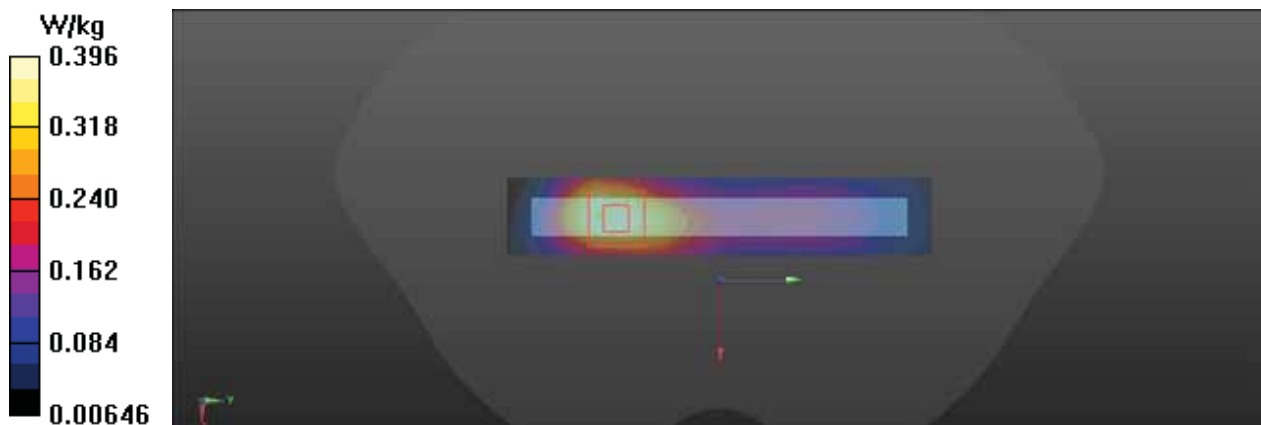

Test Laboratory: BACL SAR Testing Lab

194_LTE FDD Band 4_20M_QPSK_1RB_0Offset_Body Bottom_Ch 20300

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20300/Area Scan (21x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.234 W/kg

Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.08 V/m; Power Drift = -0.02 dB



Peak SAR (extrapolated) = 0.269 W/kg

SAR(1 g) = 0.158 W/kg; SAR(10 g) = 0.091 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 59.6%

Maximum value of SAR (measured) = 0.230 W/kg

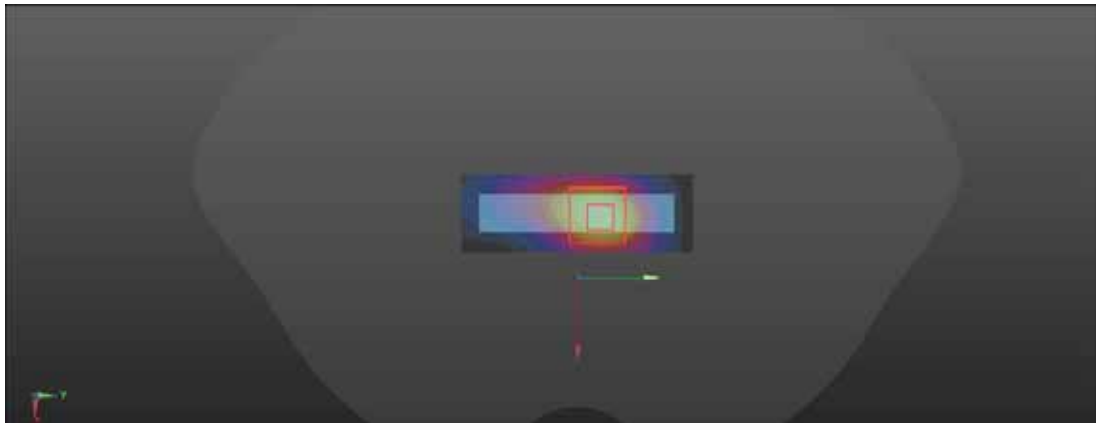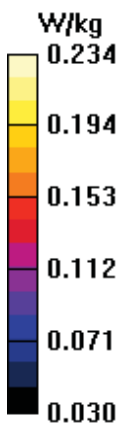

Test Laboratory: BACL SAR Testing Lab

195_LTE FDD Band 4_20M_QPSK_50%RB_0Offset_Body Front_Ch 20300

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20300/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.335 W/kg

Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.50 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.371 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.139 W/kg

Smallest distance from peaks to all points 3 dB below = 17 mm

Ratio of SAR at M2 to SAR at M1 = 61.1%

Maximum value of SAR (measured) = 0.312 W/kg

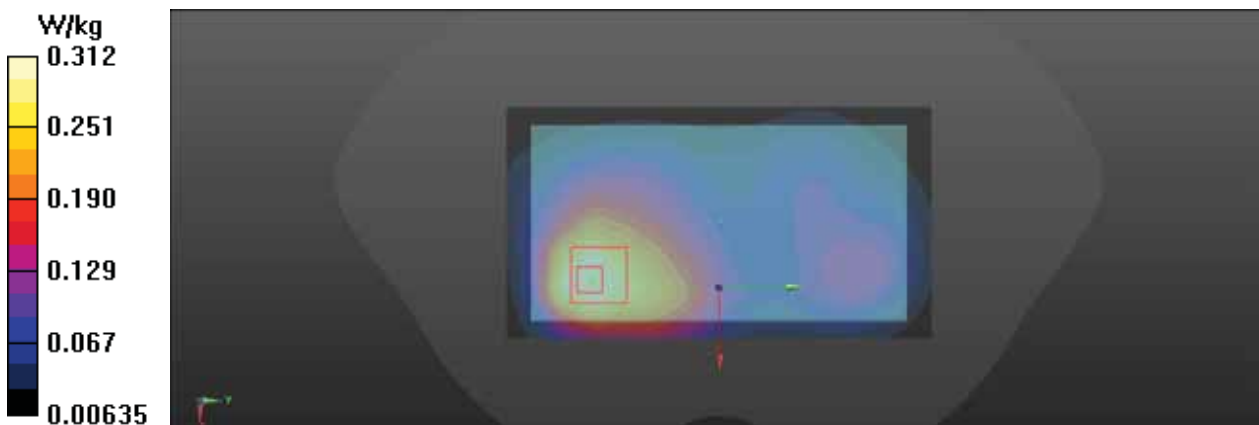

Test Laboratory: BACL SAR Testing Lab

196_LTE FDD Band 4_20M_QPSK_50%RB_0Offset_Body Back_Ch 20300

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20300/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.471 W/kg

Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.77 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.551 W/kg

SAR(1 g) = 0.333 W/kg; SAR(10 g) = 0.207 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 59.2%

Maximum value of SAR (measured) = 0.463 W/kg

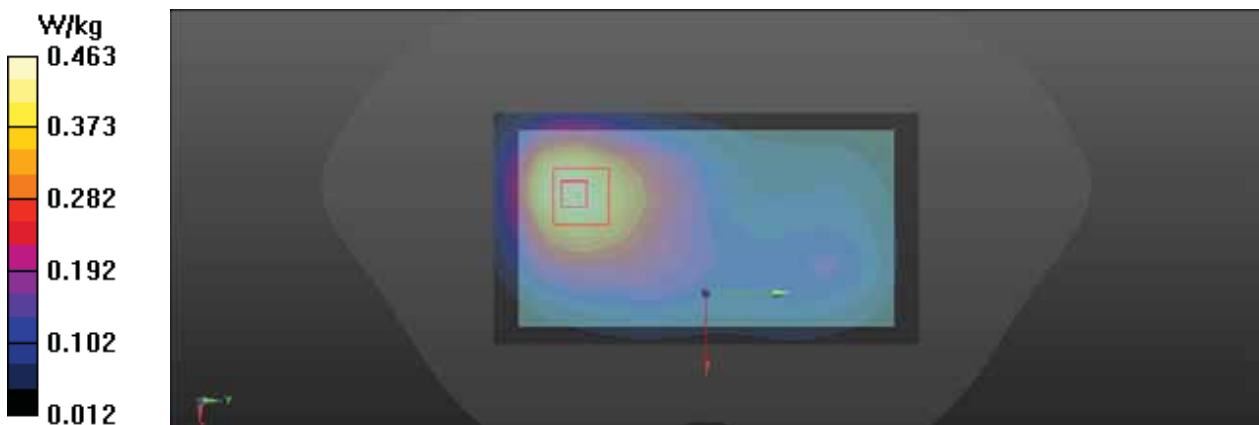

Test Laboratory: BACL SAR Testing Lab

197_LTE FDD Band 4_20M_QPSK_50%RB_0Offset_Body Left_Ch 20300

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20300/Area Scan (21x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0567 W/kg

Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.430 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0660 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.024 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 58.8%

Maximum value of SAR (measured) = 0.0558 W/kg



Test Laboratory: BACL SAR Testing Lab

198_LTE FDD Band 4_20M_QPSK_50%RB_0Offset_Body Right_Ch 20393

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20300/Area Scan (21x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.338 W/kg

Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.39 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.374 W/kg

SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.128 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 57.1%

Maximum value of SAR (measured) = 0.313 W/kg

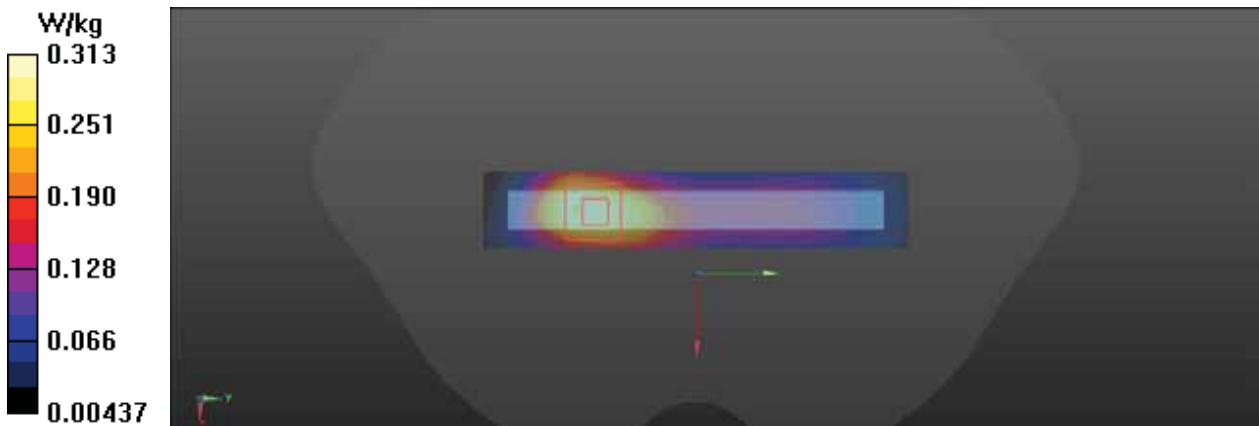

Test Laboratory: BACL SAR Testing Lab

199_LTE FDD Band 4_20M_QPSK_50%RB_0Offset_Body Bottom_Ch 20300

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20300/Area Scan (21x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.186 W/kg

Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.62 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.214 W/kg
SAR(1 g) = 0.126 W/kg; SAR(10 g) = 0.072 W/kg
Smallest distance from peaks to all points 3 dB below = 14.4 mm
Ratio of SAR at M2 to SAR at M1 = 60.1%
Maximum value of SAR (measured) = 0.182 W/kg

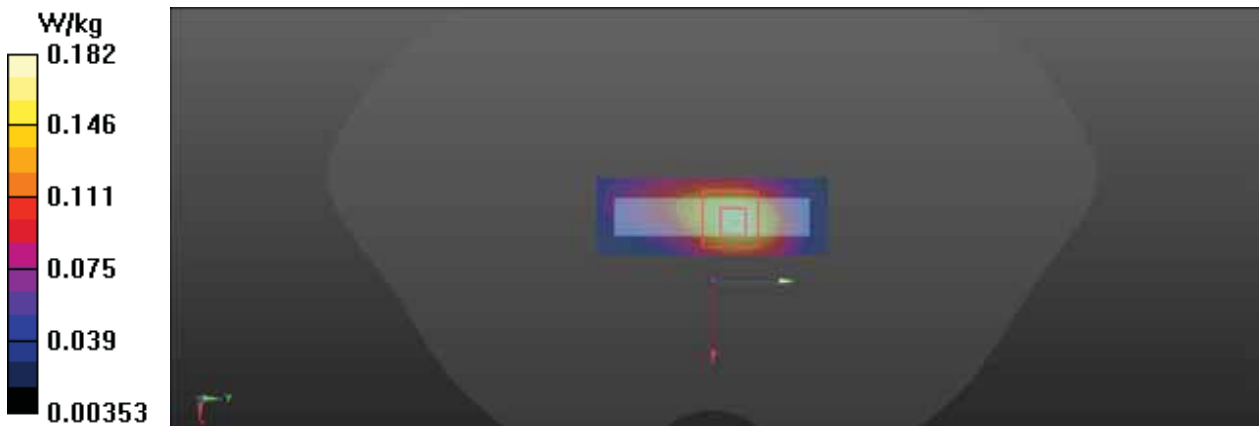

Test Laboratory: BACL SAR Testing Lab

201_LTE FDD Band 4_20M_QPSK_1RB_0Offset_Body Back_Ch 20300

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20300/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.324 W/kg

Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.14 V/m; Power Drift = -0.04 dB



Peak SAR (extrapolated) = 0.375 W/kg

SAR(1 g) = 0.230 W/kg; SAR(10 g) = 0.147 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 60.4%

Maximum value of SAR (measured) = 0.320 W/kg

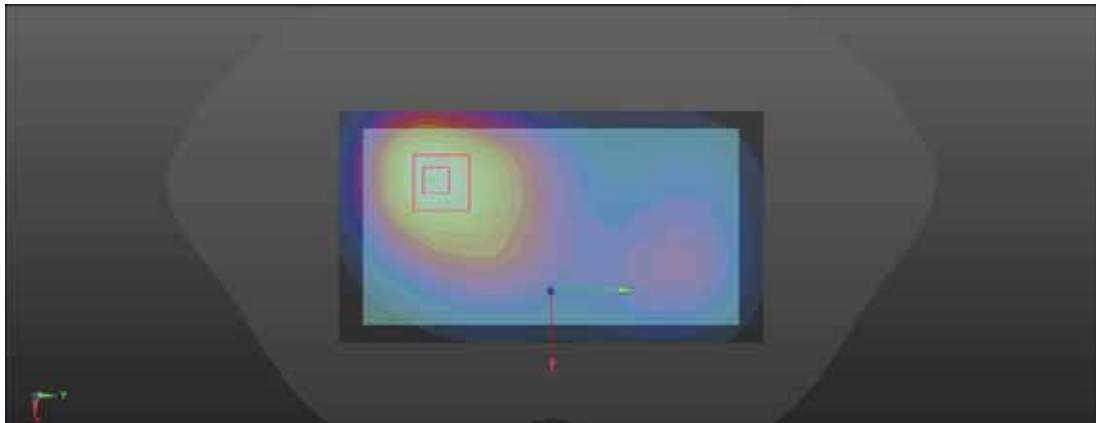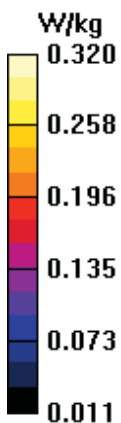

Test Laboratory: BACL SAR Testing Lab

200_LTE FDD Band 4_20M_QPSK_1RB_0Offset_Body Handheld Back_Ch 20300

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20300/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 2.75 W/kg

Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 37.63 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 3.38 W/kg

SAR(1 g) = 1.75 W/kg; SAR(10 g) = 0.995 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.7%

Maximum value of SAR (measured) = 2.65 W/kg

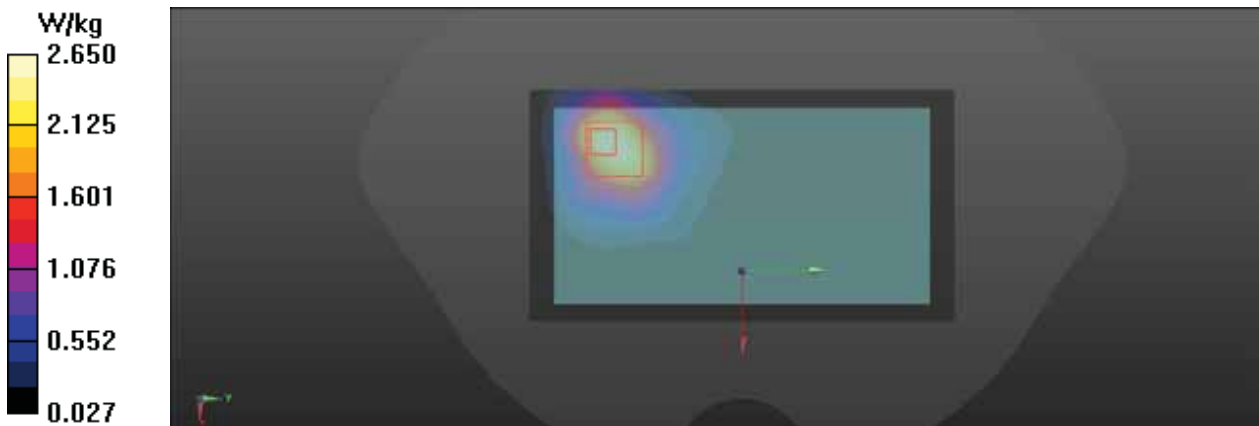

Test Laboratory: BACL SAR Testing Lab

93_LTE FDD Band 5_10M_QPSK_1RB_0Offset_Head Left Cheek_Ch 20525

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.05$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20525/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.189 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.19 V/m; Power Drift = -0.02 dB



Peak SAR (extrapolated) = 0.209 W/kg

SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.125 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 78.3%

Maximum value of SAR (measured) = 0.193 W/kg

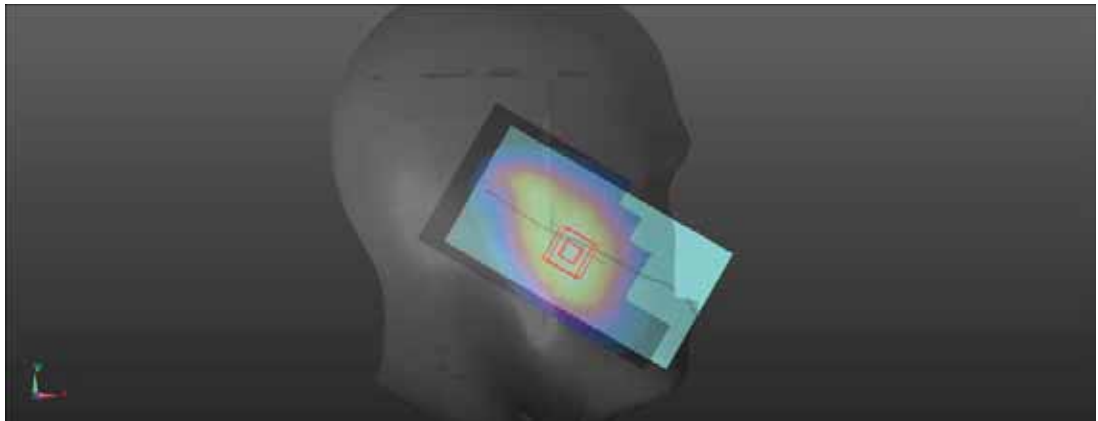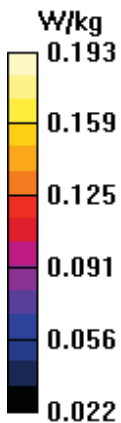

Test Laboratory:BACL.SAR TestingLab

94_LTE FDD Band 5_10M_QPSK_1RB_0Offset_Head Left Tilt_Ch 20525

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.05$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch20525/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.134 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.00 V/m; Power Drift = -0.04 dB



Peak SAR (extrapolated) = 0.149 W/kg

SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.085 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 75.9%

Maximum value of SAR (measured) = 0.137 W/kg

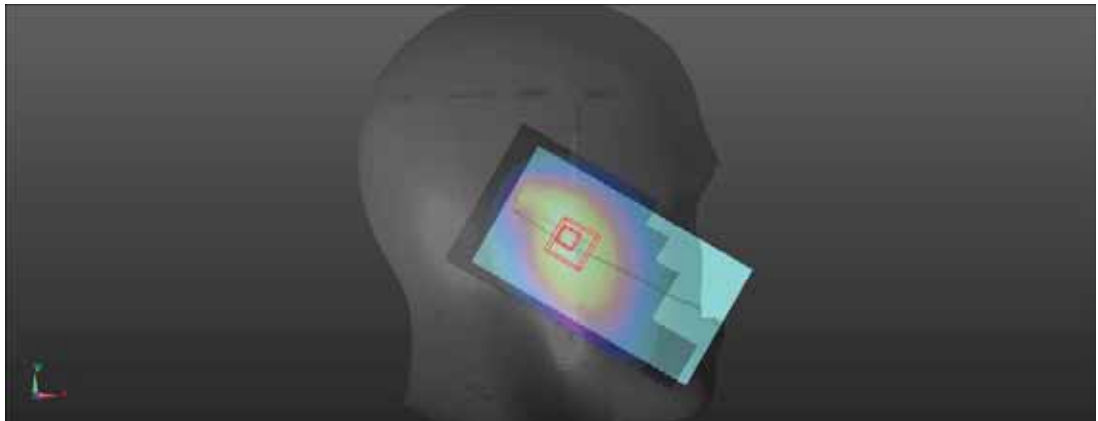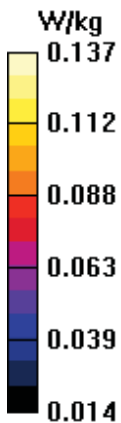

Test Laboratory:BACL.SAR TestingLab

95_LTE FDD Band 5_10M_QPSK_1RB_0Offset_Head Right Cheek_Ch 20525

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium: HSL835 Medium parameters used : $f = 836.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.05$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch20525/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.193 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.13 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.204 W/kg

SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.131 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 79.9%

Maximum value of SAR (measured) = 0.191 W/kg

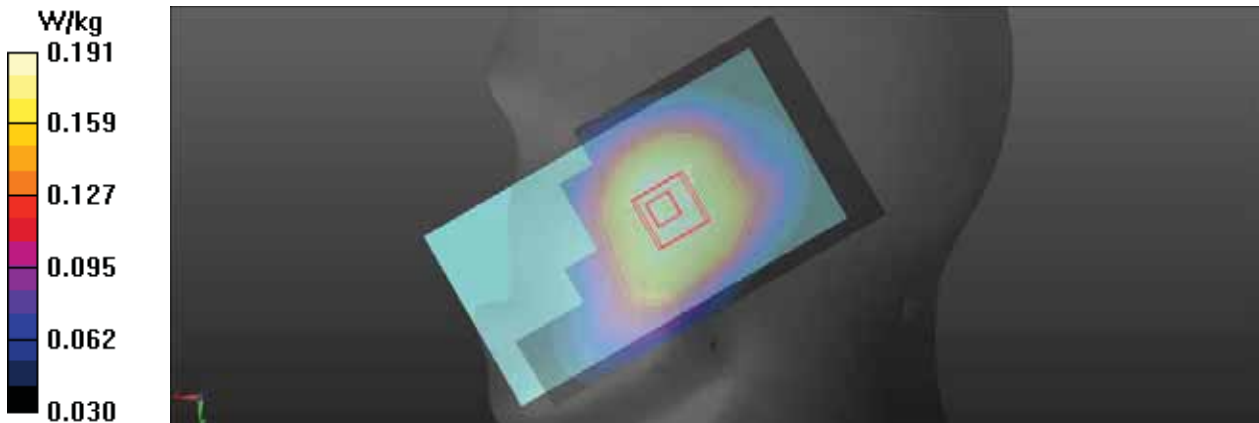

Test Laboratory:BACL.SAR TestingLab

96_LTE FDD Band 5_10M_QPSK_1RB_0Offset_Head Right Tilt_Ch 20525

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium: HSL835 Medium parameters used : $f = 836.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.05$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch20525/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.134 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.72 V/m; Power Drift = -0.00 dB



Peak SAR (extrapolated) = 0.147 W/kg

SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.088 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 76.2%

Maximum value of SAR (measured) = 0.135 W/kg

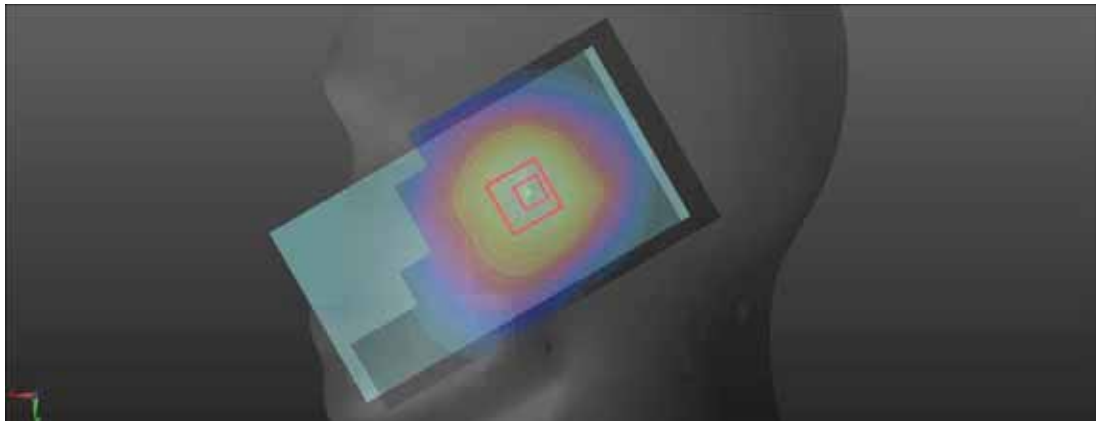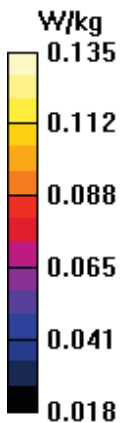

Test Laboratory:BACL.SAR TestingLab

97_LTE FDD Band 5_10M_QPSK_50%RB_0Offset_Head Left Cheek_Ch 20525

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.05$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch20525/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.154 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.89 V/m; Power Drift = 0.02 dB



Peak SAR (extrapolated) = 0.172 W/kg

SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.103 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 78.5%

Maximum value of SAR (measured) = 0.160 W/kg

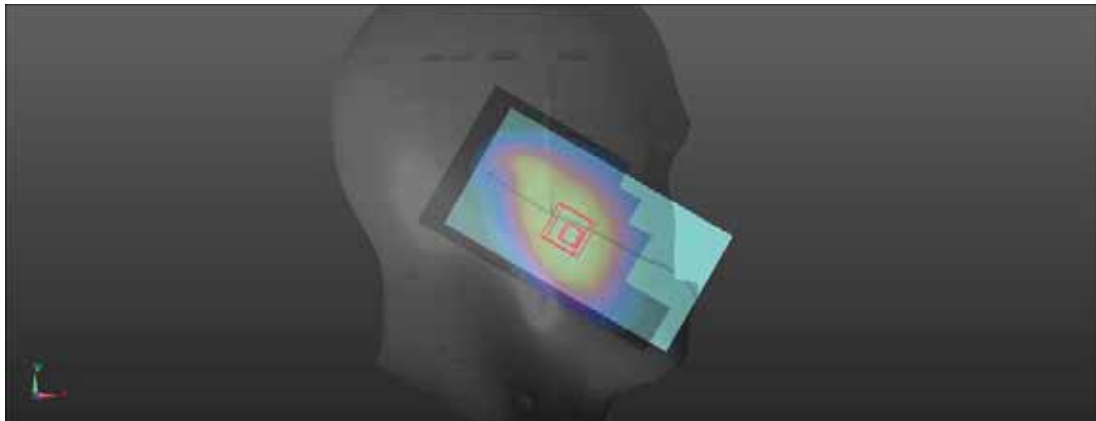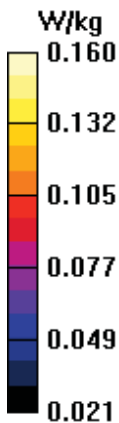

Test Laboratory:BACL.SAR TestingLab

98_LTE FDD Band 5_10M_QPSK_50%RB_0Offset_Head Left Tilt_Ch 20525

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.05$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch20525/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.111 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.93 V/m; Power Drift = -0.03 dB



Peak SAR (extrapolated) = 0.123 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.070 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 75.5%

Maximum value of SAR (measured) = 0.113 W/kg

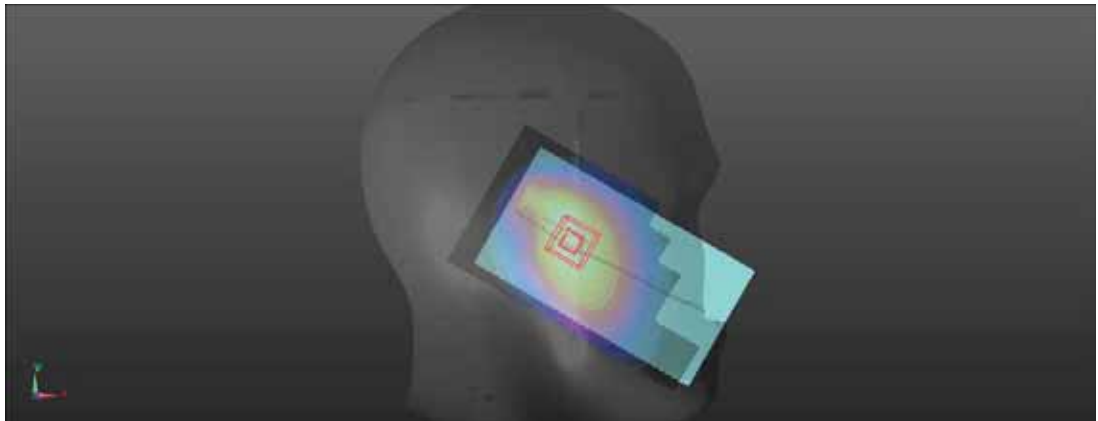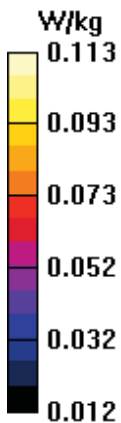

Test Laboratory: BACL SAR Testing Lab

99_LTE FDD Band 5_10M_QPSK_50%RB_0Offset_Head Right Cheek_Ch 20525

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used : $f = 836.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.05$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20525/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.159 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.73 V/m; Power Drift = 0.01 dB



Peak SAR (extrapolated) = 0.168 W/kg

SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.108 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 79.5%

Maximum value of SAR (measured) = 0.157 W/kg

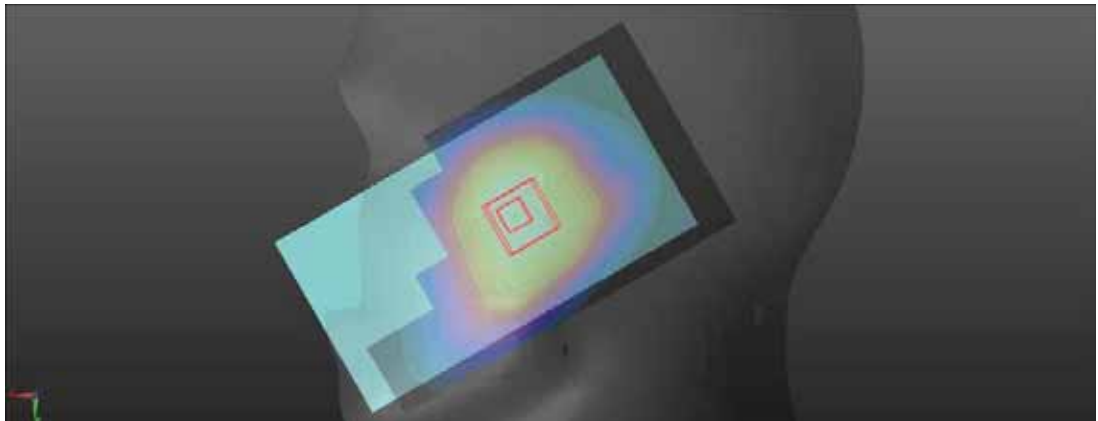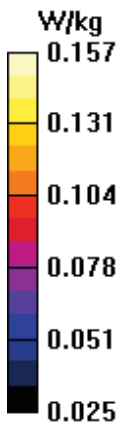

Test Laboratory: BACL SAR Testing Lab

100_LTE FDD Band 5_10M_QPSK_50%RB_0Offset_Head Right Tilt_Ch 20525

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.05$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20525/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.110 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.59 V/m; Power Drift = 0.00 dB



Peak SAR (extrapolated) = 0.122 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.072 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 76%

Maximum value of SAR (measured) = 0.112 W/kg

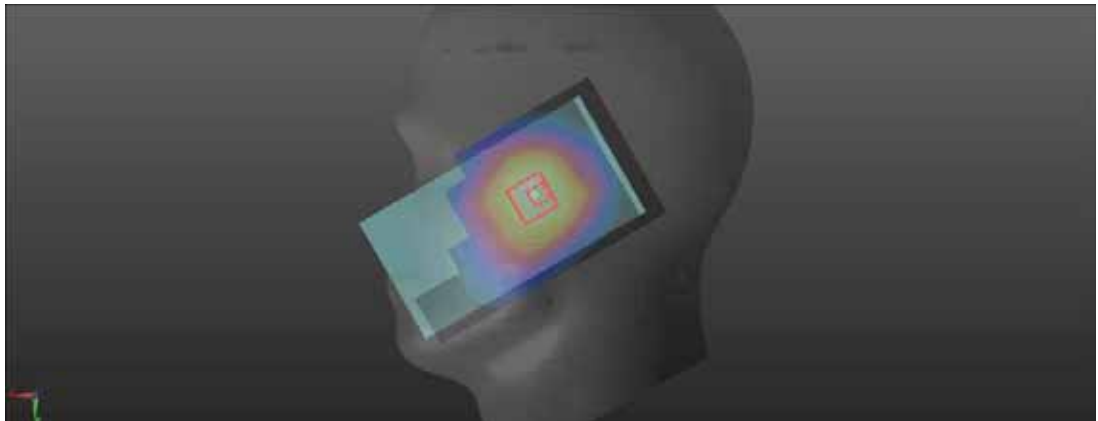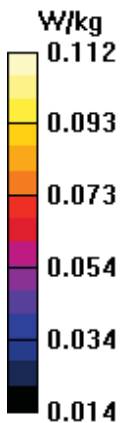

Test Laboratory:BACL.SAR TestingLab

101_LTE FDD Band 5_10M_QPSK_1RB_0Offset_Head Right Cheek_Ch 20525

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium: HSL835 Medium parameters used : $f = 836.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.05$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch20525/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.157 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.69 V/m; Power Drift = 0.01 dB



Peak SAR (extrapolated) = 0.165 W/kg

SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.106 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 80.3%

Maximum value of SAR (measured) = 0.155 W/kg

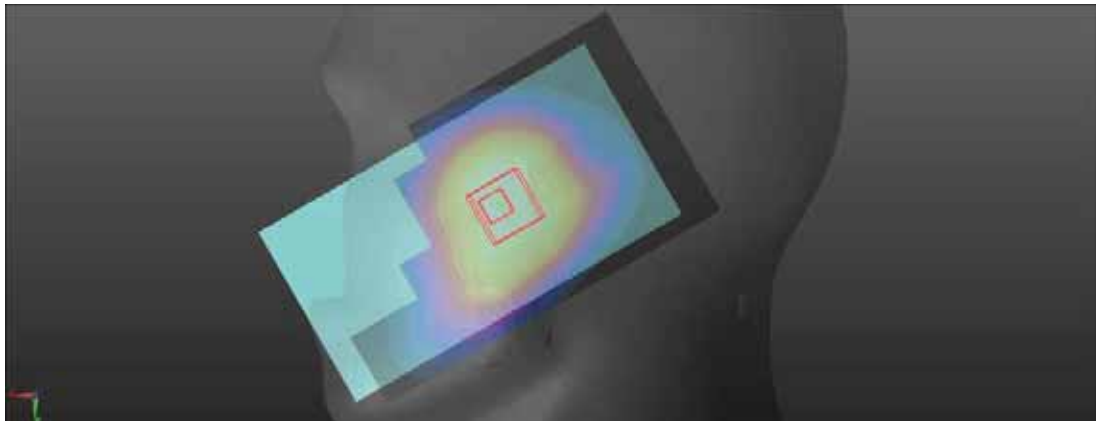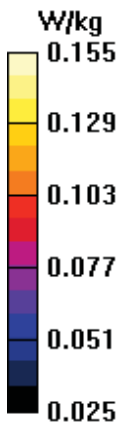

Test Laboratory:BACL.SAR TestingLab

274_LTE FDD Band 5_10M_QPSK_1RB_0Offset_Body Front_Ch 20525

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium: HSL835 Medium parameters used : $f = 836.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.05$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch20525/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.236 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.38 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.262 W/kg

SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.142 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 72.5%

Maximum value of SAR (measured) = 0.236 W/kg

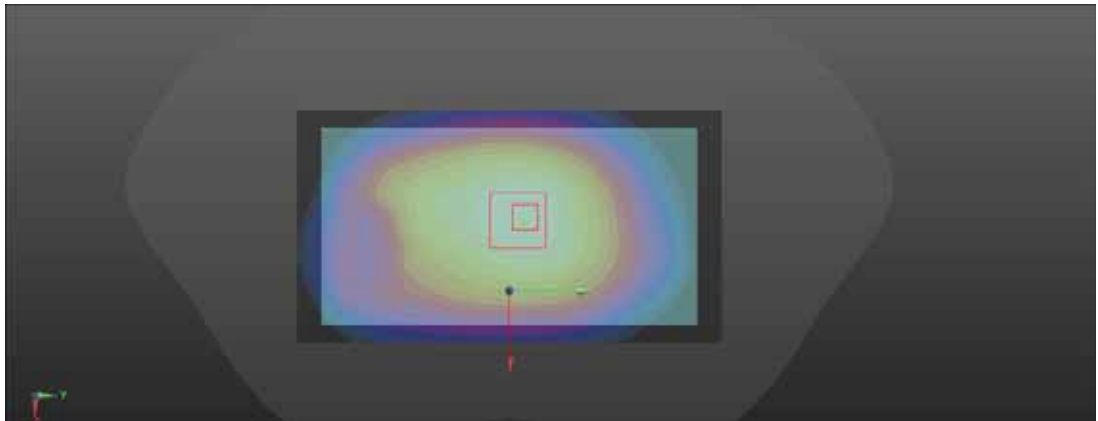

Test Laboratory:BACL.SAR TestingLab

275_LTE FDD Band 5_10M_QPSK_1RB_0Offset_Body Back_Ch 20525

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.05$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch20525/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.258 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.31 V/m; Power Drift = -0.01 dB



Peak SAR (extrapolated) = 0.286 W/kg

SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.156 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 73.2%

Maximum value of SAR (measured) = 0.260 W/kg

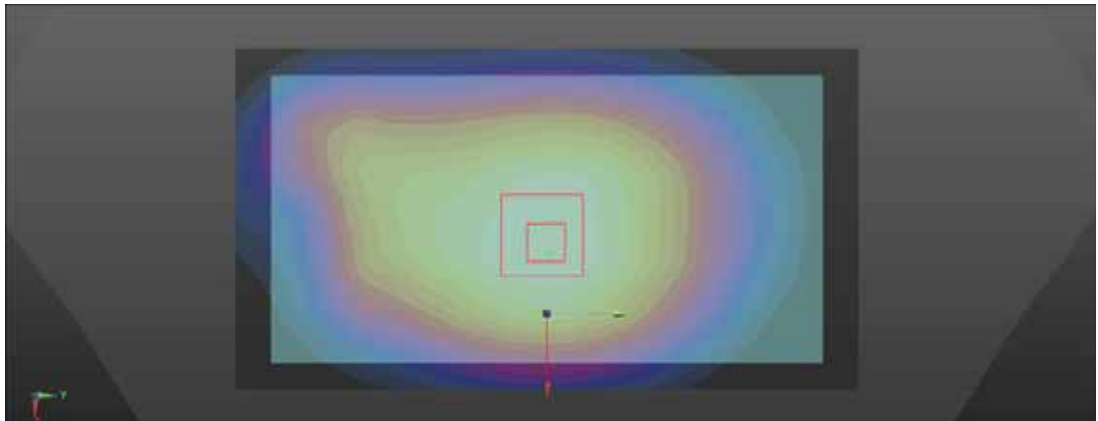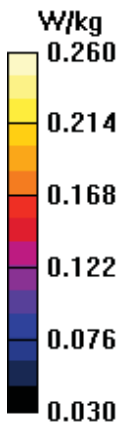

Test Laboratory: BACL SAR Testing Lab

276_LTE FDD Band 5_10M_QPSK_1RB_0Offset_Body Left_Ch 20525

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.05$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20525/Area Scan (21x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.244 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.81 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.285 W/kg

SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.129 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 66.3%

Maximum value of SAR (measured) = 0.248 W/kg

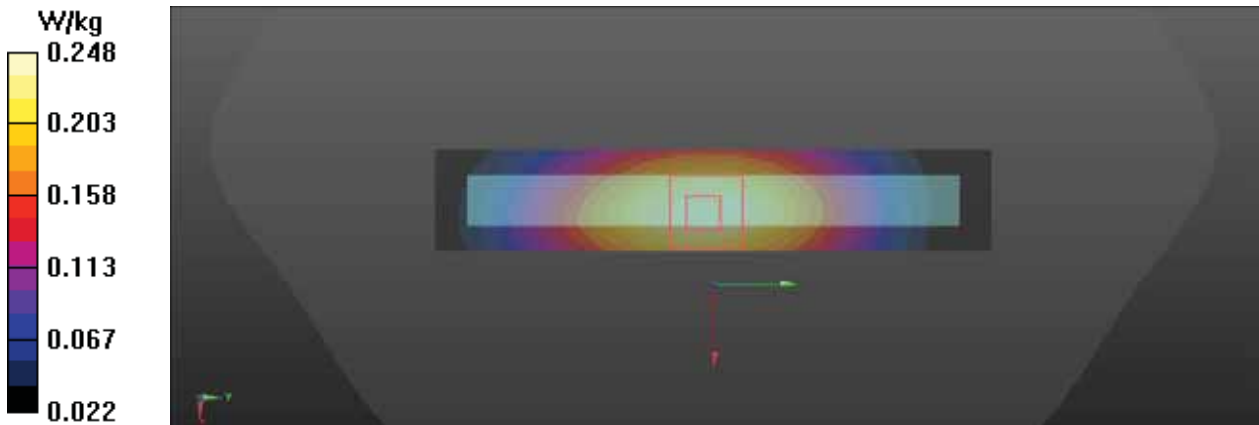

Test Laboratory: BACL SAR Testing Lab

277_LTE FDD Band 5_10M_QPSK_1RB_0Offset_Body Right_Ch 20525

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.05$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20525/Area Scan (21x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.184 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 14.25 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.209 W/kg

SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.096 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 67.1%

Maximum value of SAR (measured) = 0.183 W/kg

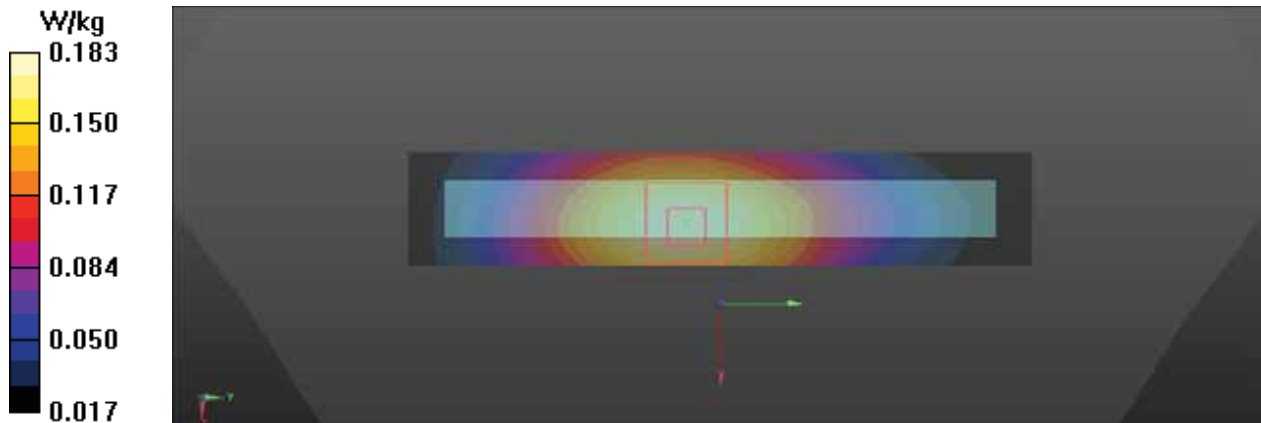

Test Laboratory: BACL SAR Testing Lab

278_LTE FDD Band 5_10M_QPSK_1RB_0Offset_Body Bottom_Ch 20525

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.05$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20525/Area Scan (31x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0987 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.470 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.149 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.037 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 50.4%

Maximum value of SAR (measured) = 0.112 W/kg

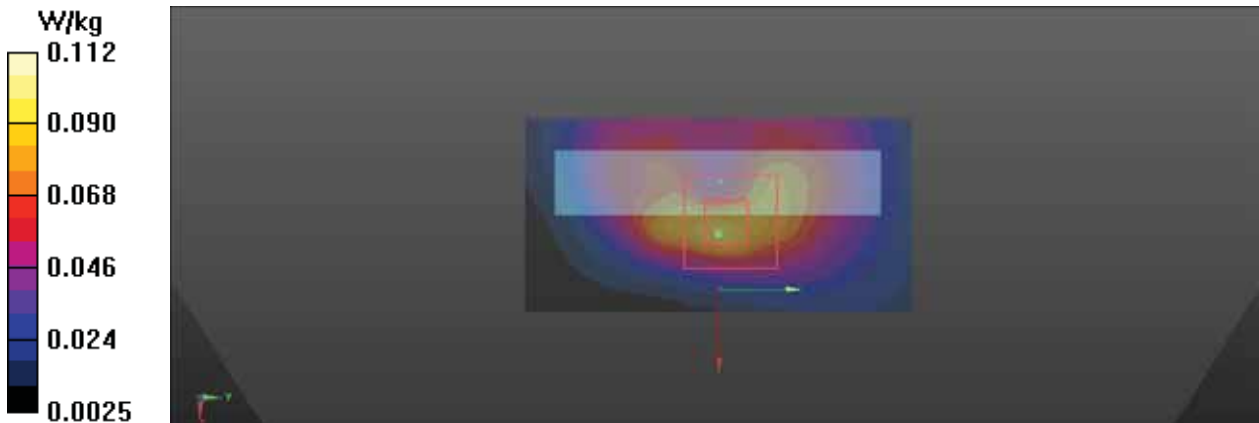

Test Laboratory:BACL.SAR TestingLab

279_LTE FDD Band 5_10M_QPSK_50%RB_0Offset_Body Front_Ch 20525

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium: HSL835 Medium parameters used : $f = 836.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.05$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch20525/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.222 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.11 V/m; Power Drift = 0.00 dB



Peak SAR (extrapolated) = 0.247 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.132 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 71.2%

Maximum value of SAR (measured) = 0.221 W/kg

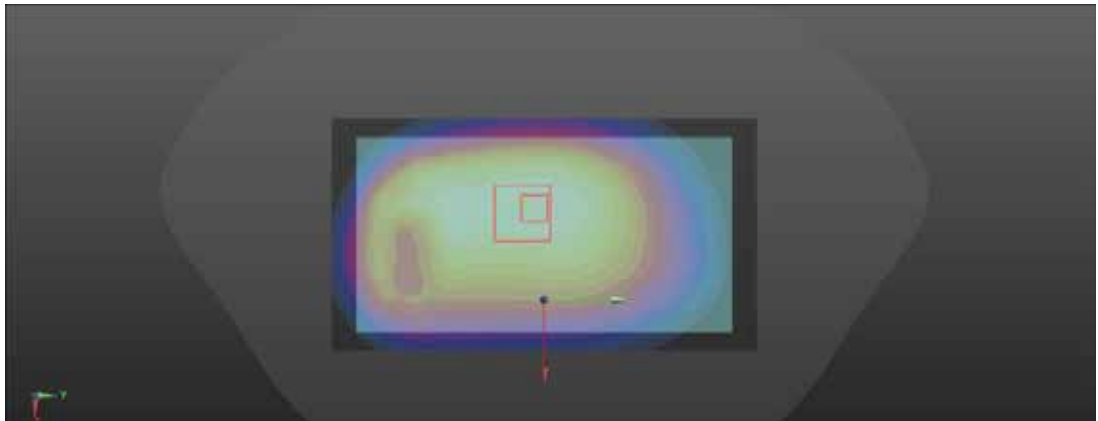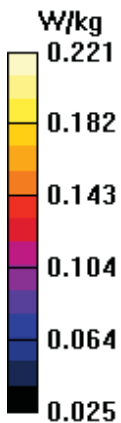

Test Laboratory:BACL.SAR TestingLab

280_LTE FDD Band 5_10M_QPSK_50%RB_0Offset_Body Back_Ch 20525

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.05$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch20525/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.236 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.47 V/m; Power Drift = -0.01 dB



Peak SAR (extrapolated) = 0.259 W/kg

SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.141 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 72.8%

Maximum value of SAR (measured) = 0.234 W/kg

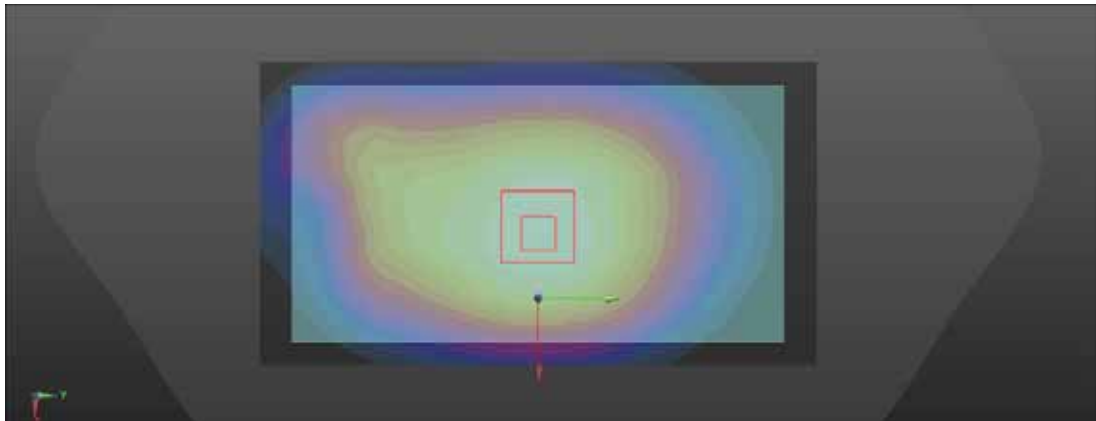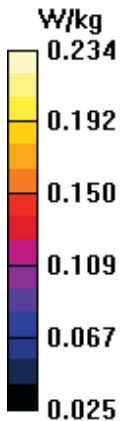

Test Laboratory: BACL SAR Testing Lab

281_LTE FDD Band 5_10M_QPSK_50%RB_0Offset_Body Left_Ch 20525

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.05$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20525/Area Scan (21x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.202 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.21 V/m; Power Drift = -0.03 dB



Peak SAR (extrapolated) = 0.235 W/kg

SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.106 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 65.8%

Maximum value of SAR (measured) = 0.206 W/kg

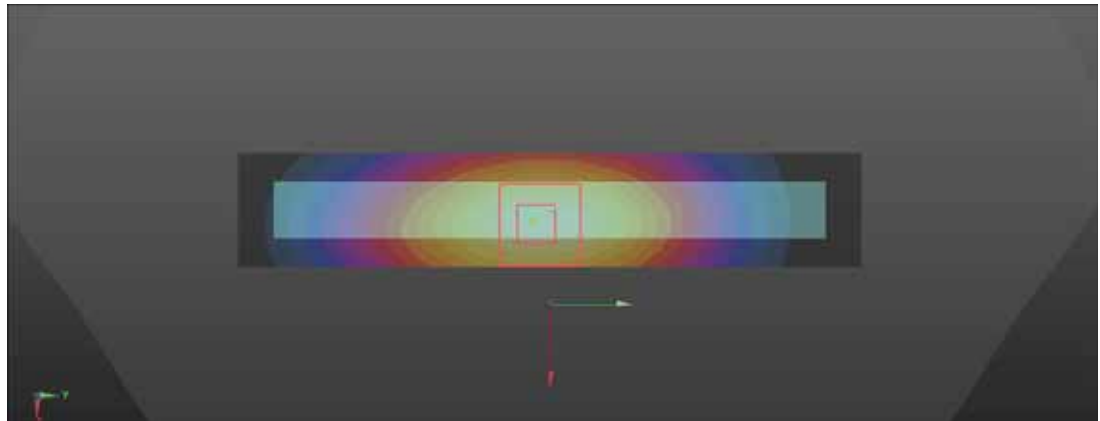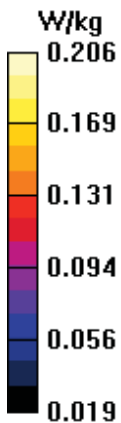

Test Laboratory: BACL SAR Testing Lab

282_LTE FDD Band 5_10M_QPSK_50%RB_0Offset_Body Right_Ch 20525

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.05$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20525/Area Scan (21x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.148 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.74 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.172 W/kg

SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.078 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 65.9%

Maximum value of SAR (measured) = 0.152 W/kg

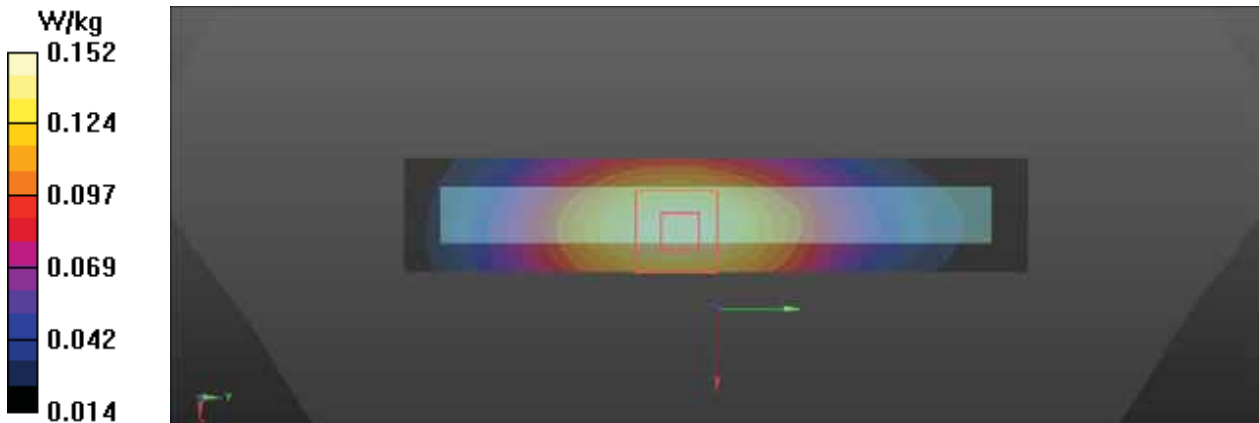

Test Laboratory: BACL SAR Testing Lab

283_LTE FDD Band 5_10M_QPSK_50%RB_0Offset_Body Bottom_Ch 20525

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.05$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20525/Area Scan (31x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0857 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.739 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.032 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 50.7%

Maximum value of SAR (measured) = 0.0974 W/kg

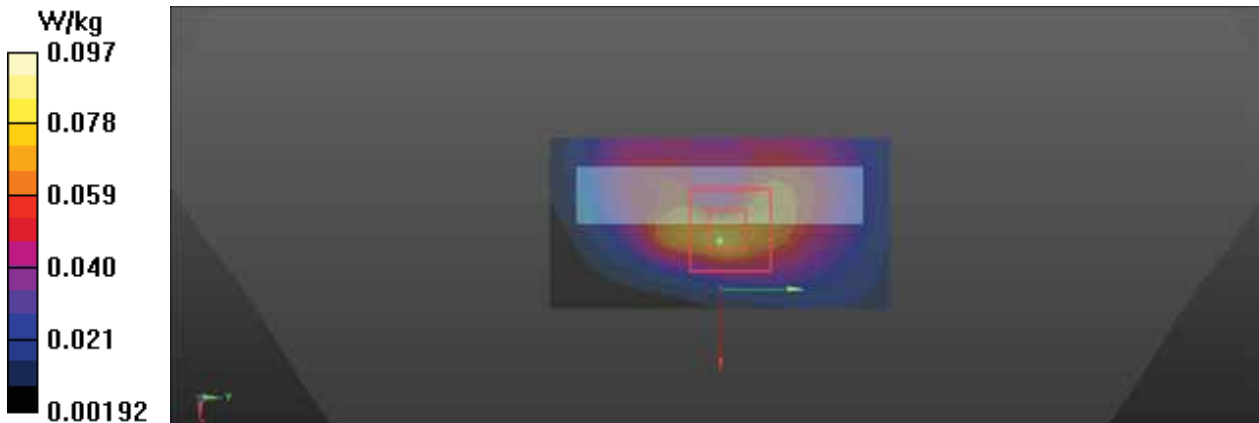

Test Laboratory: BACL SAR Testing Lab

285_LTE FDD Band 5_10M_QPSK_1RB_0Offset_Body Back_Ch 20525

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.05$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20525/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.247 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.65 V/m; Power Drift = 0.03 dB



Peak SAR (extrapolated) = 0.275 W/kg

SAR(1 g) = 0.201 W/kg; SAR(10 g) = 0.149 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 72.8%

Maximum value of SAR (measured) = 0.249 W/kg

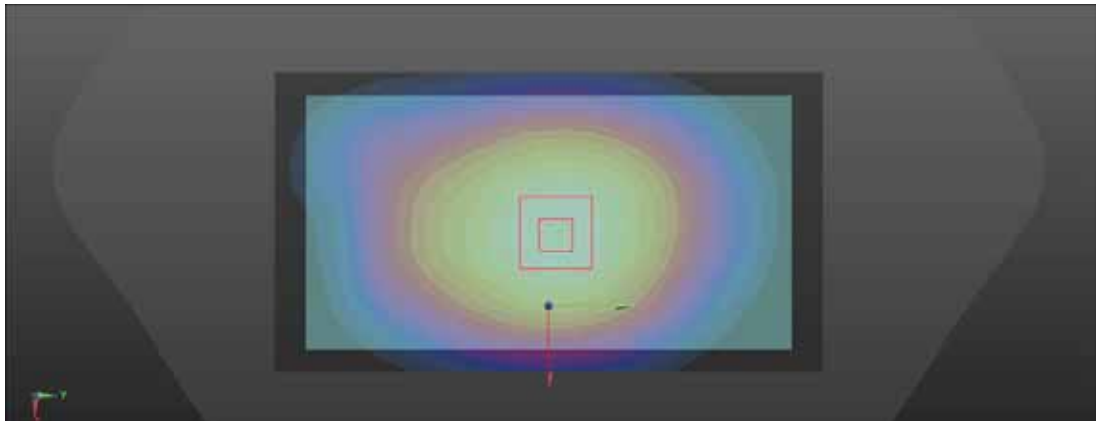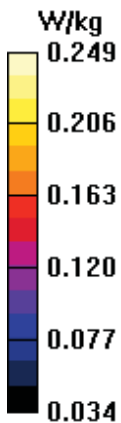

Test Laboratory: BACL SAR Testing Lab

284_LTE FDD Band 5_10M_QPSK_1RB_0Offset_Body Handheld Back_Ch 20525

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.05$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 836.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20525/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.992 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.87 V/m; Power Drift = 0.00 dB



Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.705 W/kg; SAR(10 g) = 0.428 W/kg

Smallest distance from peaks to all points 3 dB below = 15.1 mm

Ratio of SAR at M2 to SAR at M1 = 56%

Maximum value of SAR (measured) = 1.04 W/kg

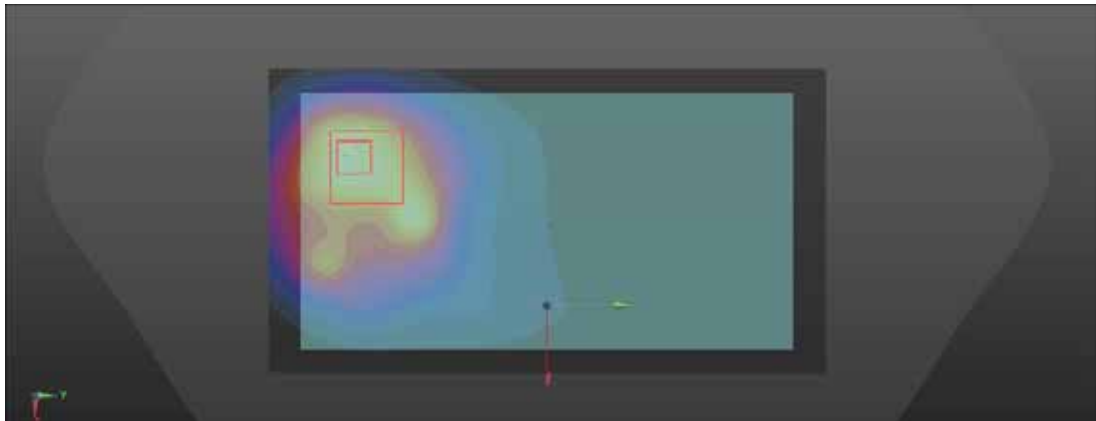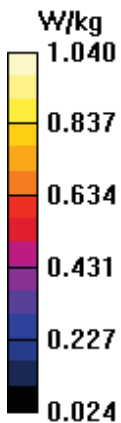

Test Laboratory:BACL.SAR TestingLab

48_LTE FDD Band 7_20M_QPSK_1RB_0Offset_Head Left Check_Ch 21100

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium: HSL2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 40.929$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2535 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch21100/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.539 W/kg

Ch21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.76 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.622 W/kg

SAR(1 g) = 0.367 W/kg; SAR(10 g) = 0.208 W/kg

Smallest distance from peaks to all points 3 dB below = 15 mm

Ratio of SAR at M2 to SAR at M1 = 58.5%

Maximum value of SAR (measured) = 0.526 W/kg

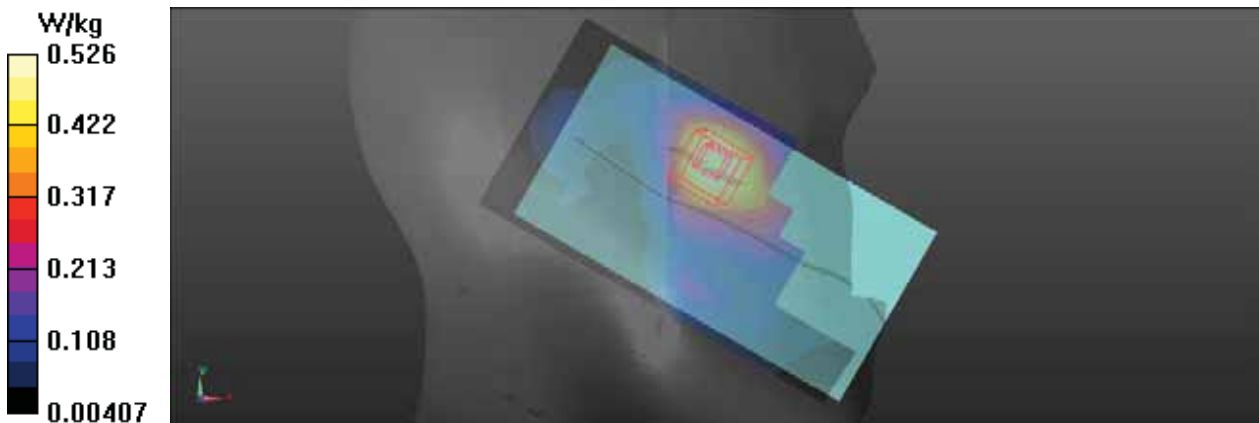

Test Laboratory:BACL.SAR TestingLab

49_LTE FDD Band 7_20M_QPSK_1RB_0Offset_Head Left Tilt_Ch 21100

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium: HSL2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 40.929$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2535 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch21100/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.302 W/kg

Ch21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.950 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.362 W/kg

SAR(1 g) = 0.201 W/kg; SAR(10 g) = 0.106 W/kg

Smallest distance from peaks to all points 3 dB below = 13 mm

Ratio of SAR at M2 to SAR at M1 = 55.6%

Maximum value of SAR (measured) = 0.306 W/kg

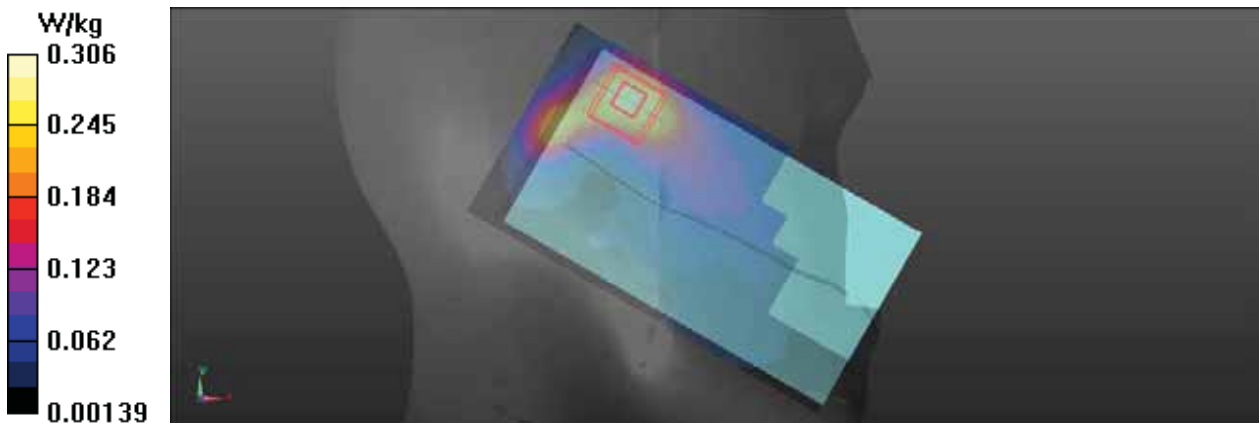

Test Laboratory:BACL.SAR TestingLab

50_LTE FDD Band 7_20M_QPSK_1RB_0Offset_Head Right Check_Ch 21100

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium: HSL2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 40.929$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2535 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch21100/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.802 W/kg

Ch21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 18.64 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.903 W/kg
SAR(1 g) = 0.517 W/kg; SAR(10 g) = 0.286 W/kg
Smallest distance from peaks to all points 3 dB below = 10.9 mm
Ratio of SAR at M2 to SAR at M1 = 56.2%
Maximum value of SAR (measured) = 0.753 W/kg

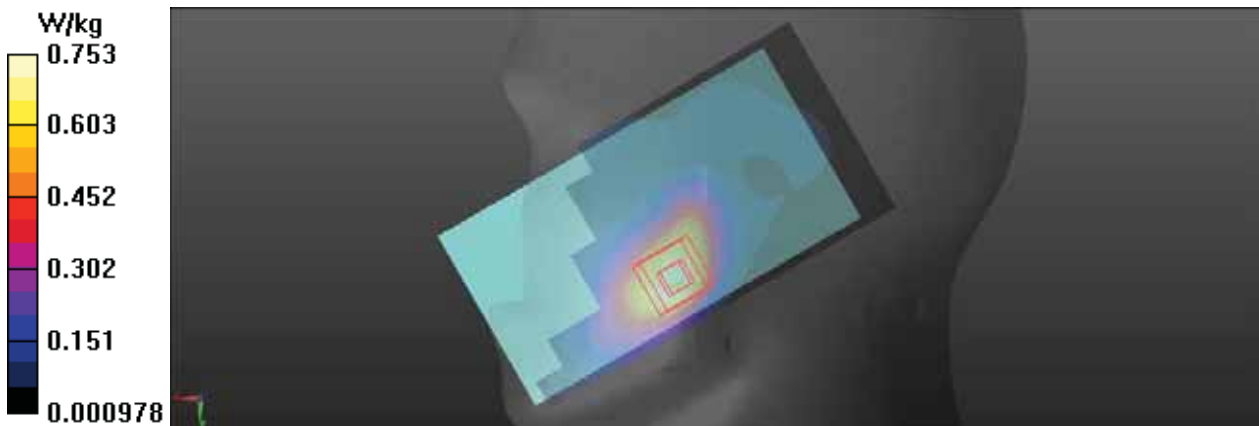

Test Laboratory:BACL.SAR TestingLab

51_LTE FDD Band 7_20M_QPSK_1RB_0Offset_Head Right Tilt_Ch 21100

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium: HSL2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 40.929$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2535 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch21100/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.248 W/kg

Ch21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 8.715 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 0.311 W/kg
SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.077 W/kg
Smallest distance from peaks to all points 3 dB below = 8.5 mm
Ratio of SAR at M2 to SAR at M1 = 52.9%
Maximum value of SAR (measured) = 0.256 W/kg

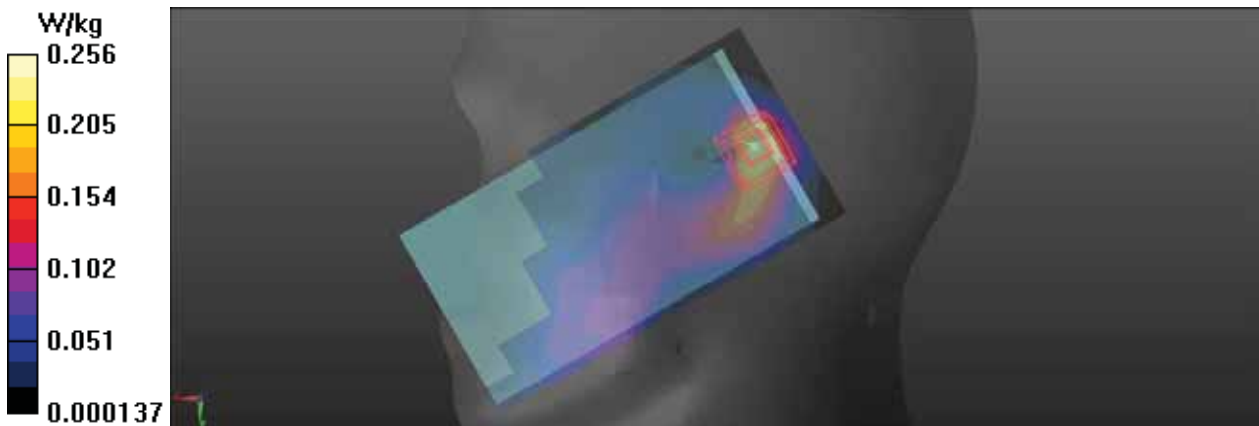

Test Laboratory:BACL.SAR TestingLab

52_LTE FDD Band 7_20M_QPSK_50%RB_0Offset_Head Left Check_Ch 21100

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium: HSL2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 40.929$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2535 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch21100/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.435 W/kg

Ch21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.19 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.506 W/kg

SAR(1 g) = 0.298 W/kg; SAR(10 g) = 0.168 W/kg

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 58.4%

Maximum value of SAR (measured) = 0.430 W/kg

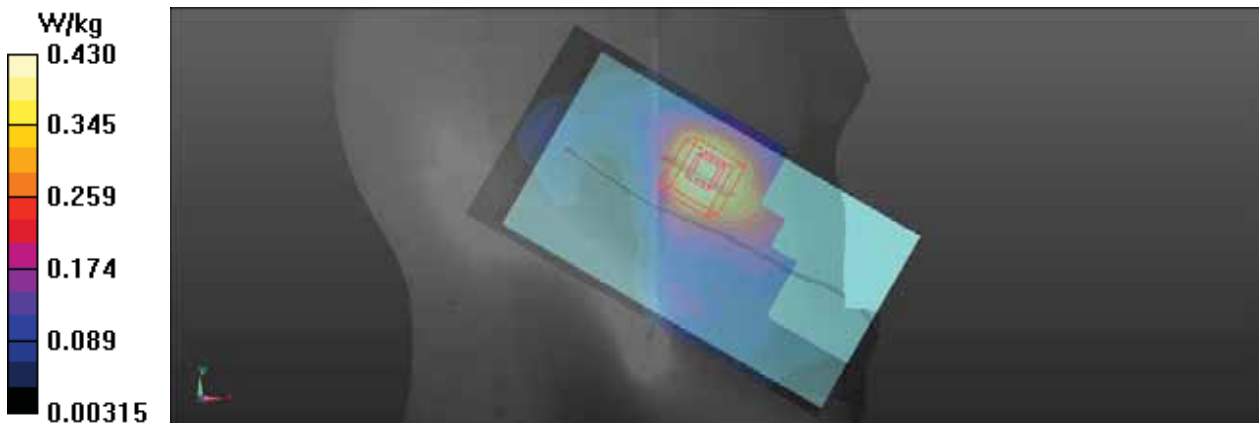

Test Laboratory:BACL.SAR TestingLab

53_LTE FDD Band 7_20M_QPSK_50%RB_0Offset_Head Left Tilt_Ch 21100

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium: HSL2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 40.929$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2535 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch21100/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.244 W/kg

Ch21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 8.843 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.300 W/kg
SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.086 W/kg
Smallest distance from peaks to all points 3 dB below = 13 mm
Ratio of SAR at M2 to SAR at M1 = 56.5%
Maximum value of SAR (measured) = 0.253 W/kg

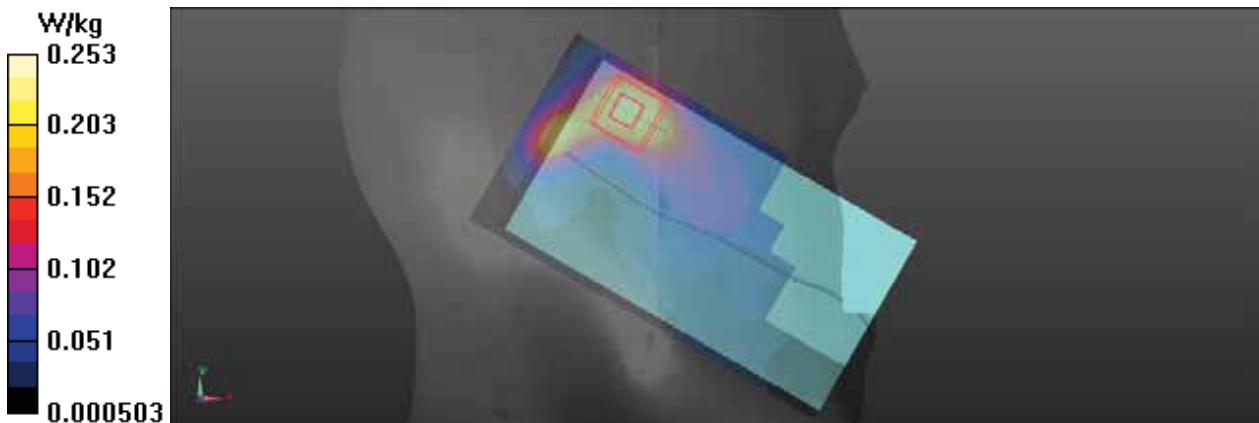

Test Laboratory: BACL SAR Testing Lab

54_LTE FDD Band 7_20M_QPSK_50%RB_0Offset_Head Right Check_Ch 21100

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: HSL2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 40.929$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2535 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch21100/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.660 W/kg

Ch21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 16.77 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.734 W/kg
SAR(1 g) = 0.421 W/kg; SAR(10 g) = 0.234 W/kg
Smallest distance from peaks to all points 3 dB below = 12 mm
Ratio of SAR at M2 to SAR at M1 = 56.6%
Maximum value of SAR (measured) = 0.621 W/kg

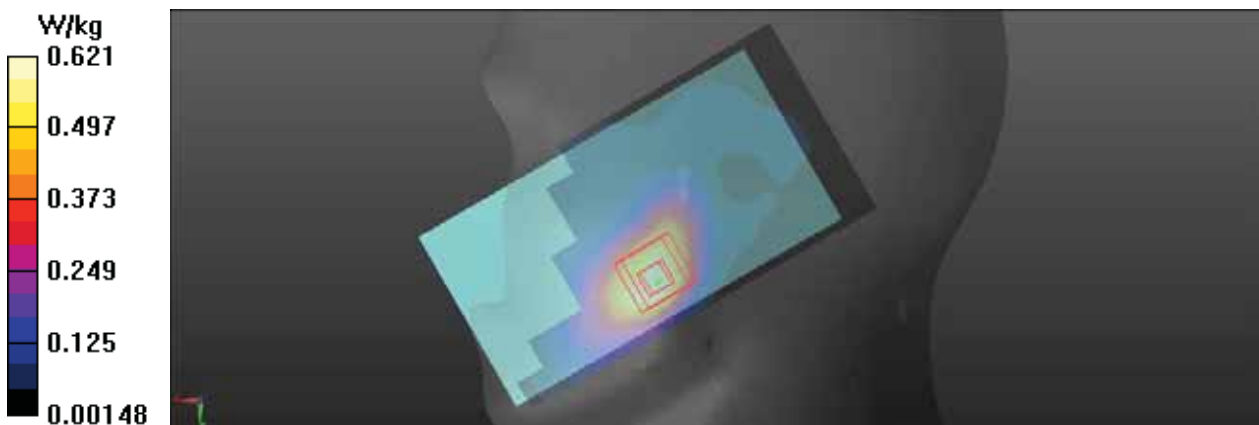

Test Laboratory:BACL.SAR TestingLab

55_LTE FDD Band 7_20M_QPSK_50%RB_0Offset_Head Right Tilt_Ch 21100

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium: HSL2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 40.929$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2535 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch21100/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.190 W/kg

Ch21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 8.094 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.250 W/kg
SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.060 W/kg
Smallest distance from peaks to all points 3 dB below = 9.2 mm
Ratio of SAR at M2 to SAR at M1 = 51.7%
Maximum value of SAR (measured) = 0.204 W/kg

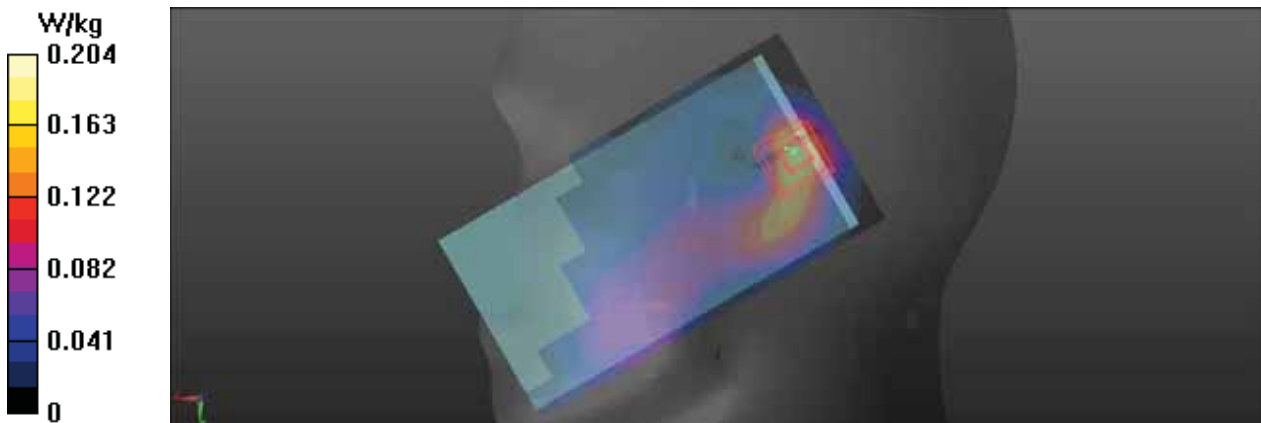

Test Laboratory:BACL.SAR TestingLab

56_LTE FDD Band 7_20M_QPSK_1RB_0Offset_Head Right Check_Ch 21100

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium: HSL2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 40.929$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2535 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch21100/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.785 W/kg

Ch21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.17 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.860 W/kg

SAR(1 g) = 0.498 W/kg; SAR(10 g) = 0.279 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 58%

Maximum value of SAR (measured) = 0.730 W/kg

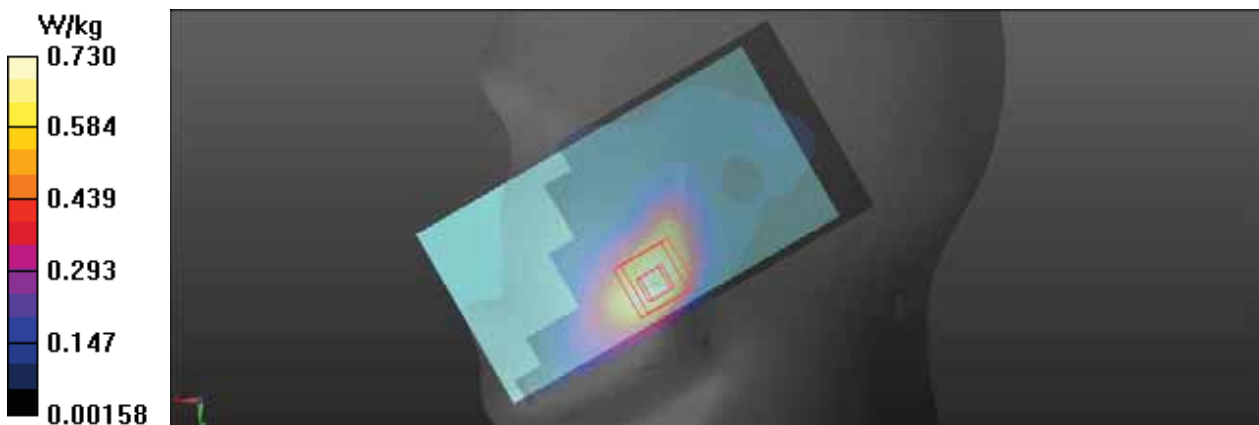

Test Laboratory: BACL SAR Testing Lab

214_LTE FDD Band 7_20M_QPSK_1RB_0Offset_Body Front_Ch 21100

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: HSL2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 40.929$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2535 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 21100/Area Scan (81x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.594 W/kg

Ch 21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 14.73 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.726 W/kg
SAR(1 g) = 0.379 W/kg; SAR(10 g) = 0.200 W/kg
Smallest distance from peaks to all points 3 dB below = 12.7 mm
Ratio of SAR at M2 to SAR at M1 = 52%
Maximum value of SAR (measured) = 0.582 W/kg

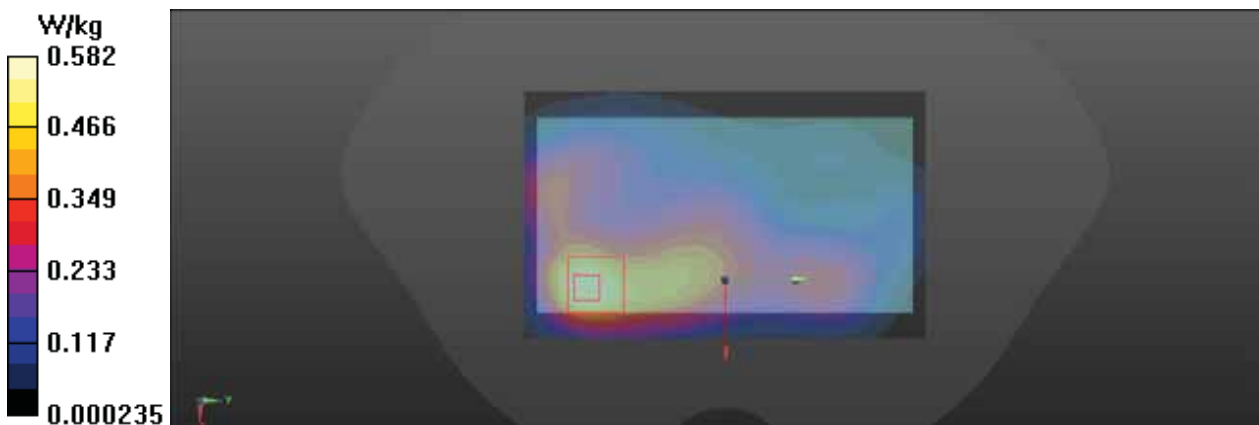

Test Laboratory: BACL SAR Testing Lab

215_LTE FDD Band 7_20M_QPSK_1RB_0Offset_Body Back_Ch 21100

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: HSL2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 40.929$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2535 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 21100/Area Scan (81x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.275 W/kg

Ch 21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 12.10 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.338 W/kg
SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.103 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 52.9%
Maximum value of SAR (measured) = 0.273 W/kg

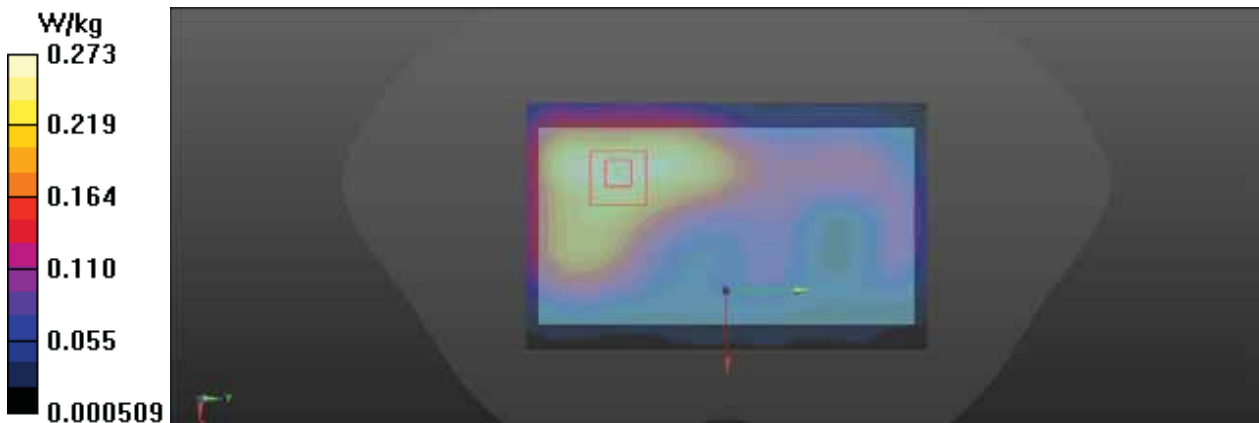

Test Laboratory: BACL SAR Testing Lab

216_LTE FDD Band 7_20M_QPSK_1RB_0Offset_Body Left_Ch 21100

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: HSL2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 40.929$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2535 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 21100/Area Scan (41x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0650 W/kg

Ch 21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.593 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 0.0740 W/kg
SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.019 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 51.8%
Maximum value of SAR (measured) = 0.0585 W/kg

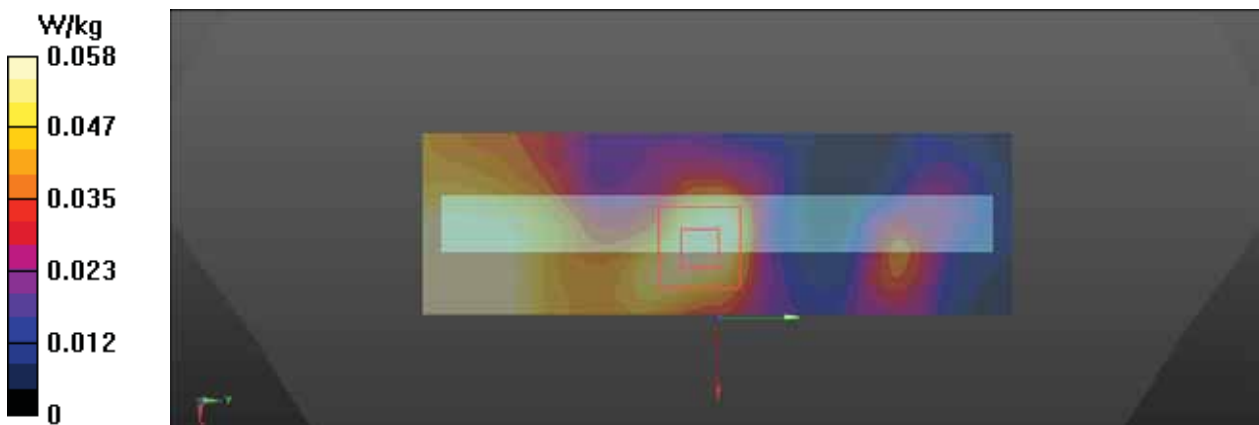

Test Laboratory: BACL SAR Testing Lab

217_LTE FDD Band 7_20M_QPSK_1RB_0Offset_Body Right_Ch 21100

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: HSL2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 40.929$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2535 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 21100/Area Scan (41x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.558 W/kg

Ch 21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 16.44 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.667 W/kg
SAR(1 g) = 0.334 W/kg; SAR(10 g) = 0.171 W/kg
Smallest distance from peaks to all points 3 dB below = 13.9 mm
Ratio of SAR at M2 to SAR at M1 = 49%
Maximum value of SAR (measured) = 0.535 W/kg

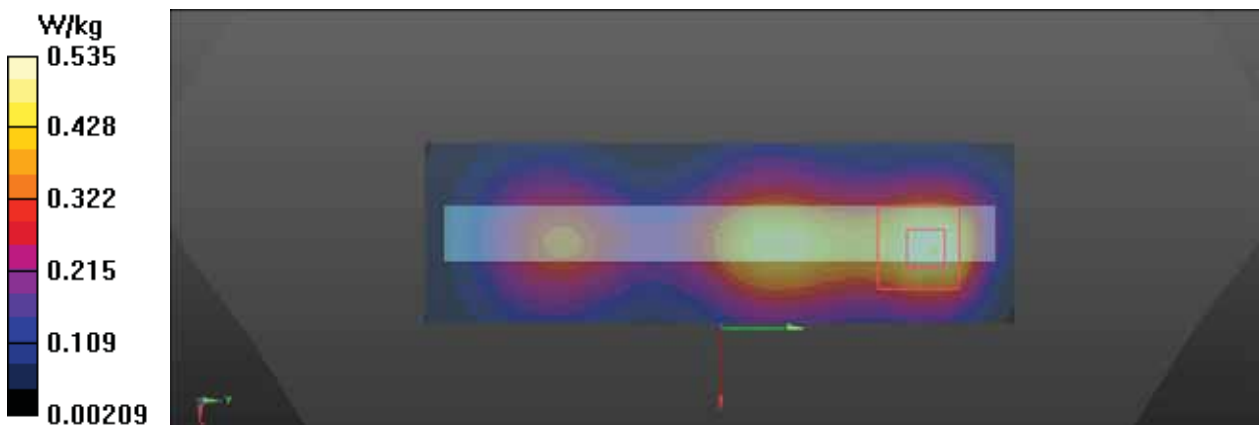

Test Laboratory:BACL.SAR TestingLab

218_LTE FDD Band 7_20M_QPSK_1RB_0Offset_Body Bottom_Ch 21100

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium: HSL2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 40.929$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2535 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch 21100/Area Scan (41x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.447 W/kg

Ch 21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 14.93 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.541 W/kg
SAR(1 g) = 0.277 W/kg; SAR(10 g) = 0.138 W/kg
Smallest distance from peaks to all points 3 dB below = 12.6 mm
Ratio of SAR at M2 to SAR at M1 = 51.5%
Maximum value of SAR (measured) = 0.442 W/kg

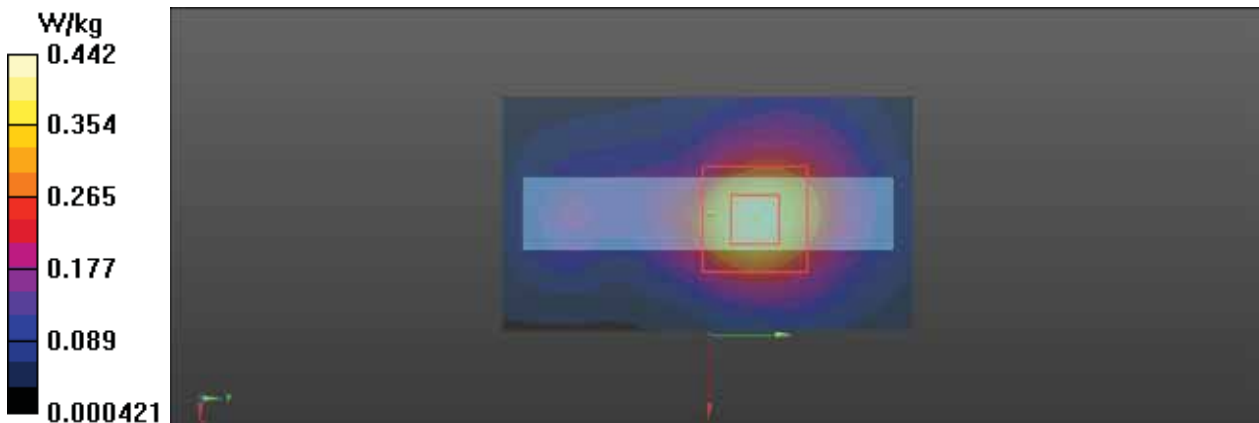

Test Laboratory:BACL.SAR TestingLab

219_LTE FDD Band 7_20M_QPSK_50%RB_0Offset_Body Front_Ch 21100

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium: HSL2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 40.929$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2535 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch 21100/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.449 W/kg

Ch 21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 12.56 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.534 W/kg
SAR(1 g) = 0.281 W/kg; SAR(10 g) = 0.150 W/kg
Smallest distance from peaks to all points 3 dB below = 13.5 mm
Ratio of SAR at M2 to SAR at M1 = 49.7%
Maximum value of SAR (measured) = 0.431 W/kg

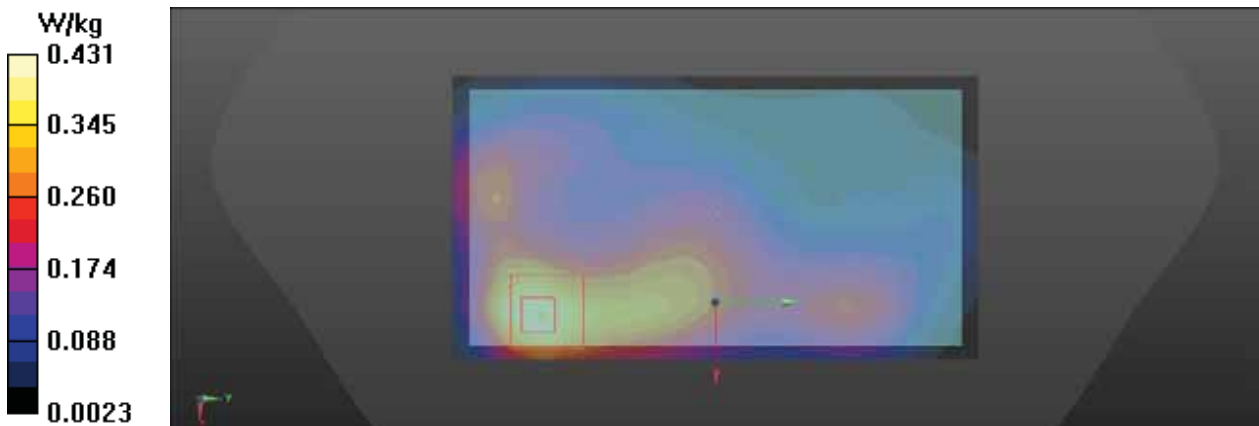

Test Laboratory: BACL SAR Testing Lab

220_LTE FDD Band 7_20M_QPSK_50%RB_0Offset_Body Back_Ch 21100

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: HSL2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 40.929$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2535 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 21100/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.216 W/kg

Ch 21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 10.80 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.272 W/kg
SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.082 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 50.5%
Maximum value of SAR (measured) = 0.221 W/kg

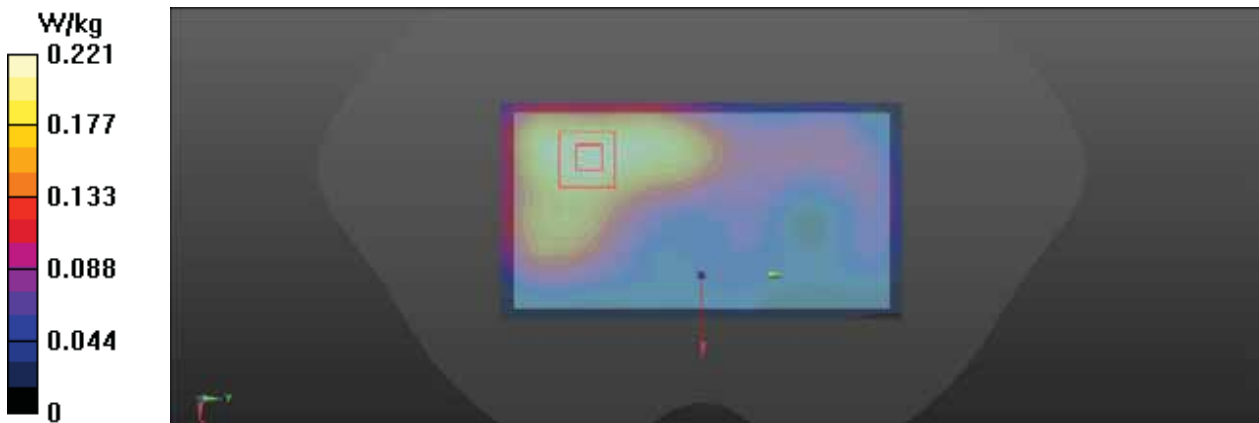

Test Laboratory: BACL SAR Testing Lab

221_LTE FDD Band 7_20M_QPSK_50%RB_0Offset_Body Left_Ch 21100

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: HSL2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 40.929$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2535 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 21100/Area Scan (41x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0550 W/kg

Ch 21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.014 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.0640 W/kg
SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.021 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 57.6%
Maximum value of SAR (measured) = 0.0532 W/kg

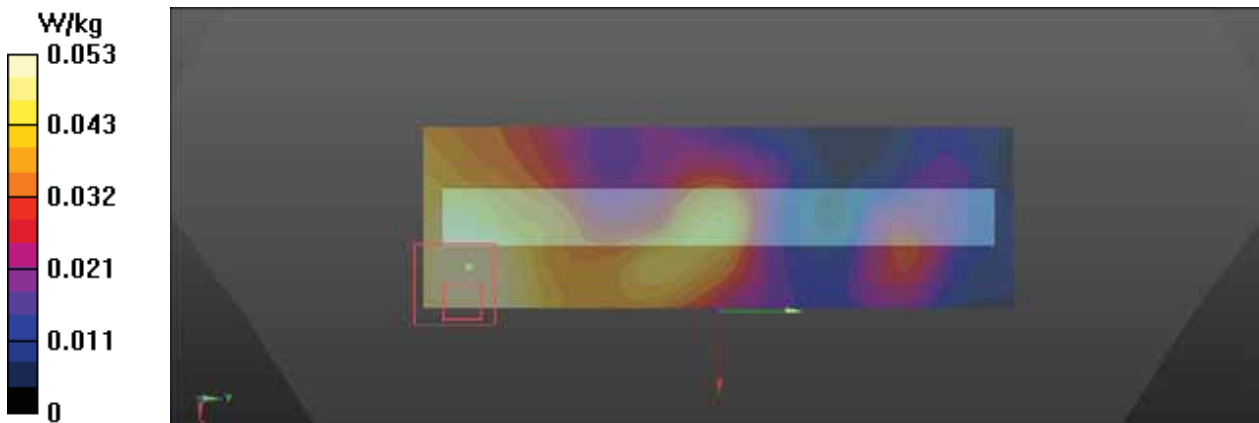

Test Laboratory: BACL SAR Testing Lab

222_LTE FDD Band 7_20M_QPSK_50%RB_0Offset_Body Right_Ch 21100

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: HSL2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 40.929$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2535 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 21100/Area Scan (41x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.485 W/kg

Ch 21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 15.00 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 0.583 W/kg
SAR(1 g) = 0.291 W/kg; SAR(10 g) = 0.149 W/kg
Smallest distance from peaks to all points 3 dB below = 13.3 mm
Ratio of SAR at M2 to SAR at M1 = 48.9%
Maximum value of SAR (measured) = 0.468 W/kg

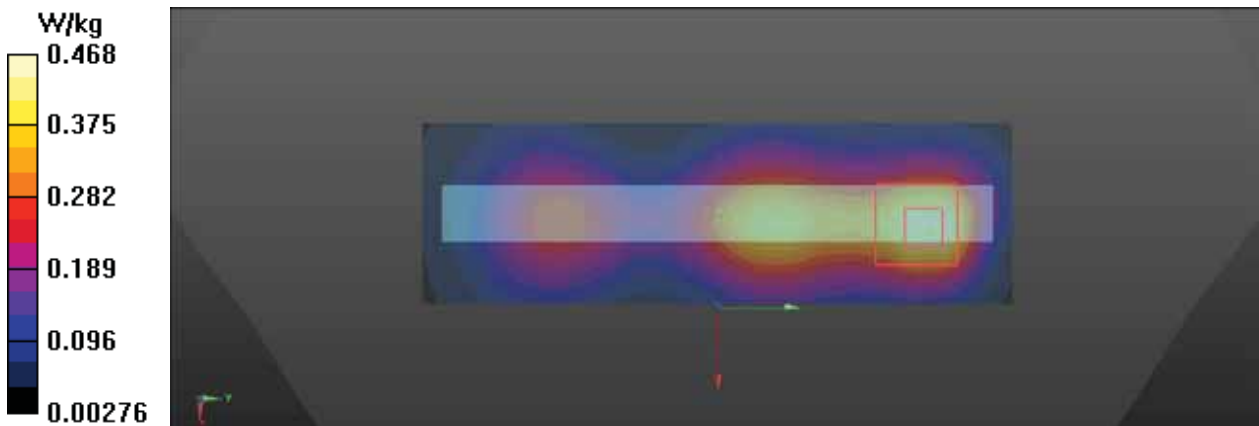

Test Laboratory: BACL SAR Testing Lab

223_LTE FDD Band 7_20M_QPSK_50%RB_0Offset_Body Bottom_Ch 21100

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: HSL2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 40.929$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2535 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 21100/Area Scan (41x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.371 W/kg

Ch 21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 13.58 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.444 W/kg
SAR(1 g) = 0.228 W/kg; SAR(10 g) = 0.112 W/kg
Smallest distance from peaks to all points 3 dB below = 12.4 mm
Ratio of SAR at M2 to SAR at M1 = 51.4%
Maximum value of SAR (measured) = 0.364 W/kg

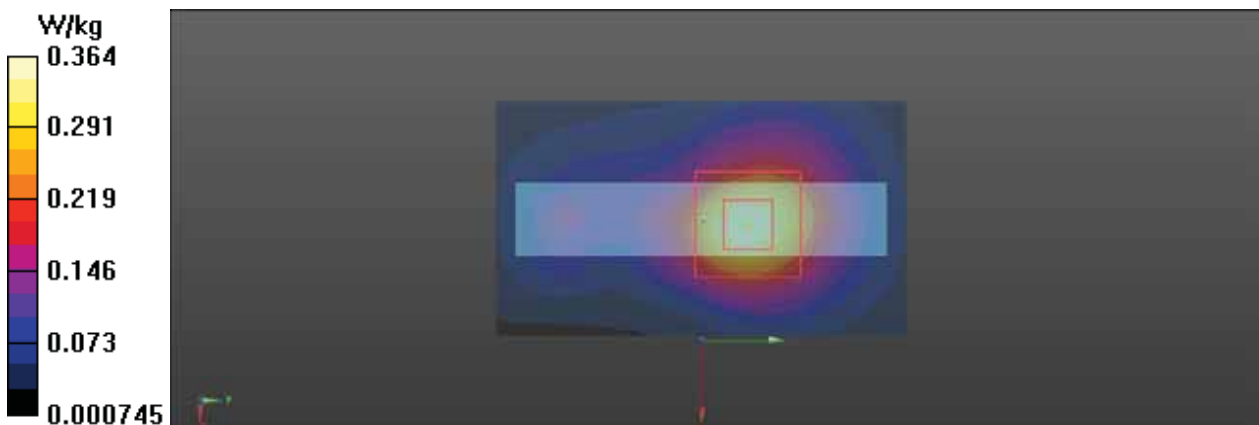

Test Laboratory: BACL SAR Testing Lab

225_LTE FDD Band 7_20M_QPSK_1RB_0Offset_Body Front_Ch 21100

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: HSL2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 40.929$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2535 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 21100/Area Scan (81x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.481 W/kg

Ch 21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 12.67 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 0.605 W/kg
SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.163 W/kg
Smallest distance from peaks to all points 3 dB below = 12.7 mm
Ratio of SAR at M2 to SAR at M1 = 51.6%
Maximum value of SAR (measured) = 0.483 W/kg

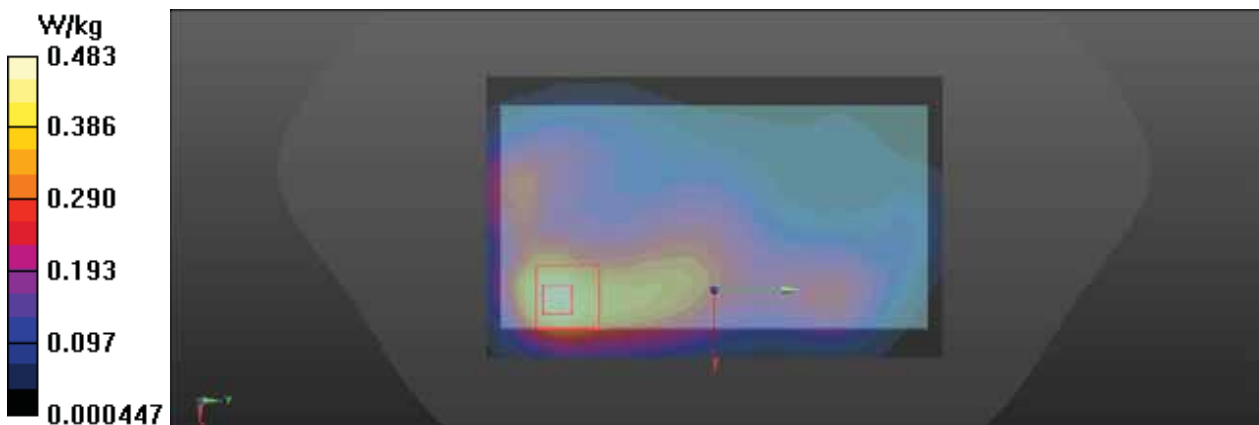

Test Laboratory: BACL SAR Testing Lab

224_LTE FDD Band 7_20M_QPSK_1RB_0Offset_Body Handheld Front_Ch 21100

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: HSL2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 40.929$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2535 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 21100/Area Scan (81x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 5.11 W/kg

Ch 21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 24.14 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 6.60 W/kg
SAR(1 g) = 2.86 W/kg; SAR(10 g) = 1.21 W/kg
Smallest distance from peaks to all points 3 dB below = 7.6 mm
Ratio of SAR at M2 to SAR at M1 = 45.4%
Maximum value of SAR (measured) = 4.87 W/kg

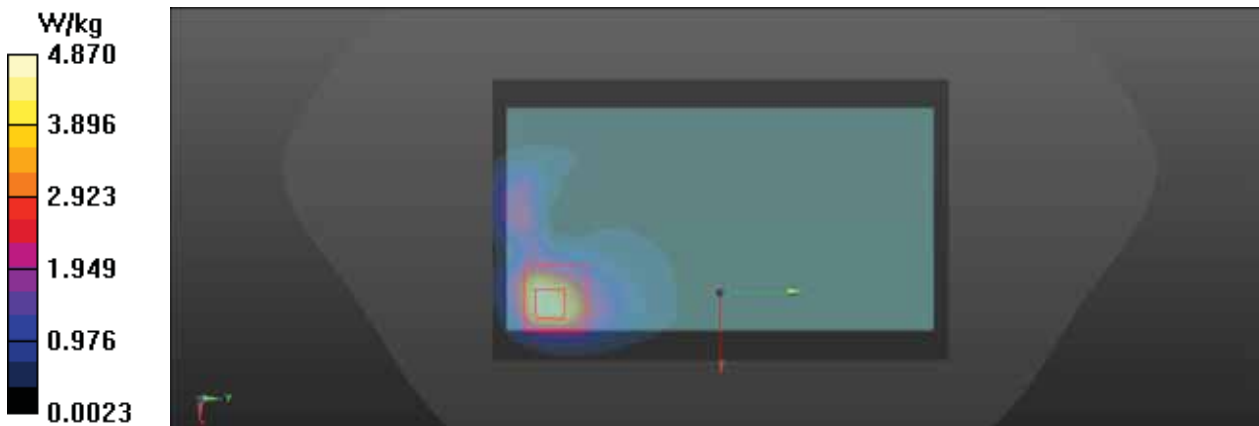

Test Laboratory: BACL SAR Testing Lab

57_LTE FDD Band 12_10M_QPSK_1RB_0Offset_Head Left Cheek_Ch 23095

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL_750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.554$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 707.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.125 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.40 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.131 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.085 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 79.4%

Maximum value of SAR (measured) = 0.122 W/kg

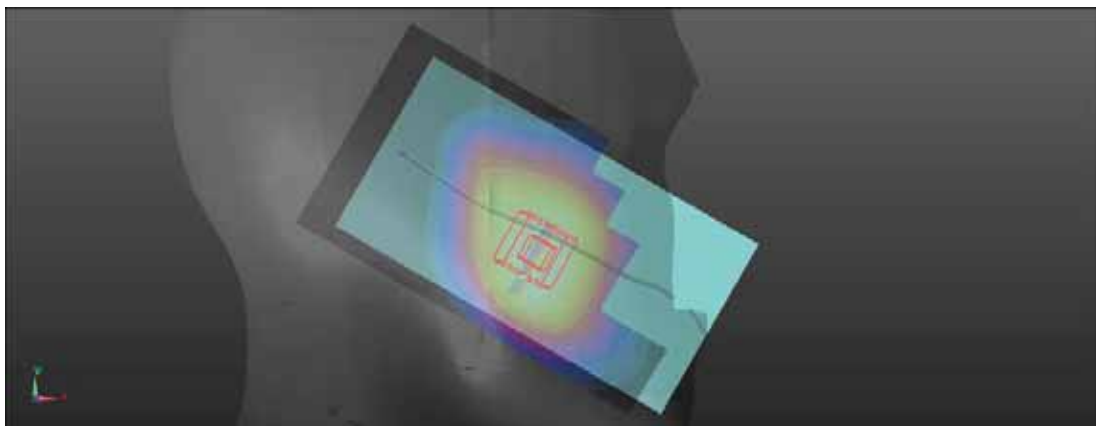

Test Laboratory: BACL SAR Testing Lab

58_LTE FDD Band 12_10M_QPSK_1RB_0Offset_Head Left Tilt_Ch 23095

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL_750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.554$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 707.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0668 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.514 V/m; Power Drift = 0.13 dB



Peak SAR (extrapolated) = 0.0750 W/kg

SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.048 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 77.8%

Maximum value of SAR (measured) = 0.0692 W/kg

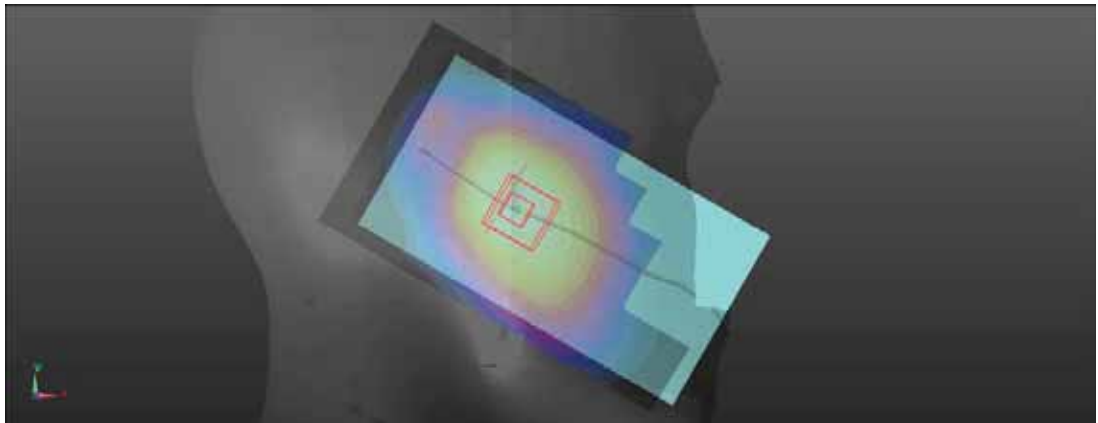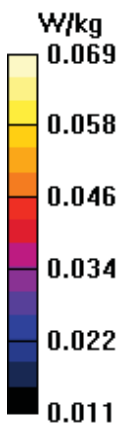

Test Laboratory: BACL SAR Testing Lab

59_LTE FDD Band 12_10M_QPSK_1RB_0Offset_Head Right Check_Ch 23095

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL_750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.554$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 707.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.128 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.60 V/m; Power Drift = 0.06 dB



Peak SAR (extrapolated) = 0.136 W/kg

SAR(1 g) = 0.108 W/kg; SAR(10 g) = 0.084 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 79%

Maximum value of SAR (measured) = 0.126 W/kg

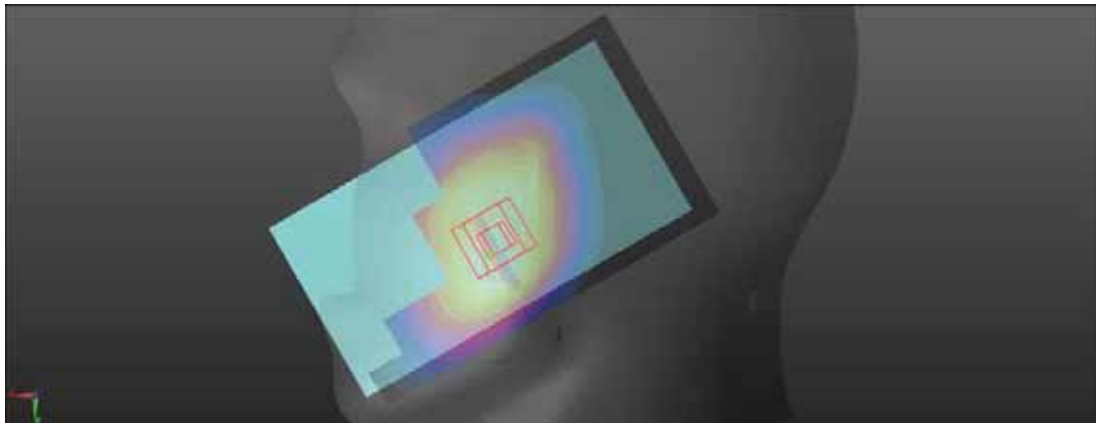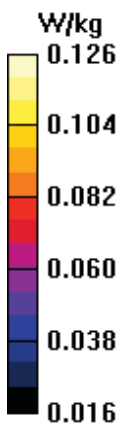

Test Laboratory: BACL SAR Testing Lab

60_LTE FDD Band 12_10M_QPSK_1RB_0Offset_Head Right Tilt_Ch 23095

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.554$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 707.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0634 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.439 V/m; Power Drift = 0.05 dB



Peak SAR (extrapolated) = 0.0660 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.043 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 80.9%

Maximum value of SAR (measured) = 0.0617 W/kg

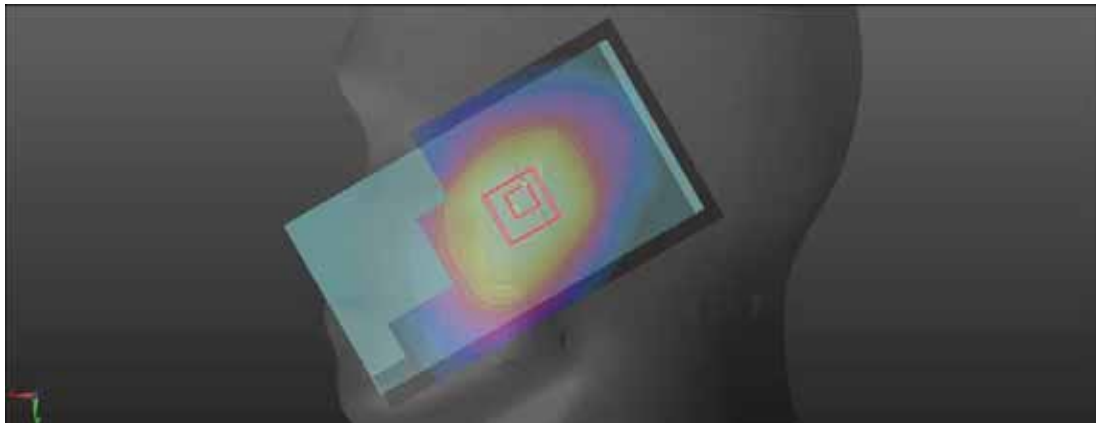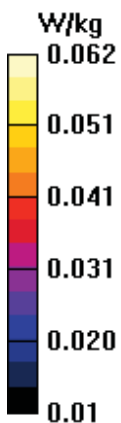

Test Laboratory: BACL SAR Testing Lab

61_LTE FDD Band 12_10M_QPSK_50%RB_0Offset_Head Left Cheek_Ch 23095

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.554$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 707.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0966 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.88 V/m; Power Drift = -0.03 dB



Peak SAR (extrapolated) = 0.101 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.066 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 82.4%

Maximum value of SAR (measured) = 0.0946 W/kg

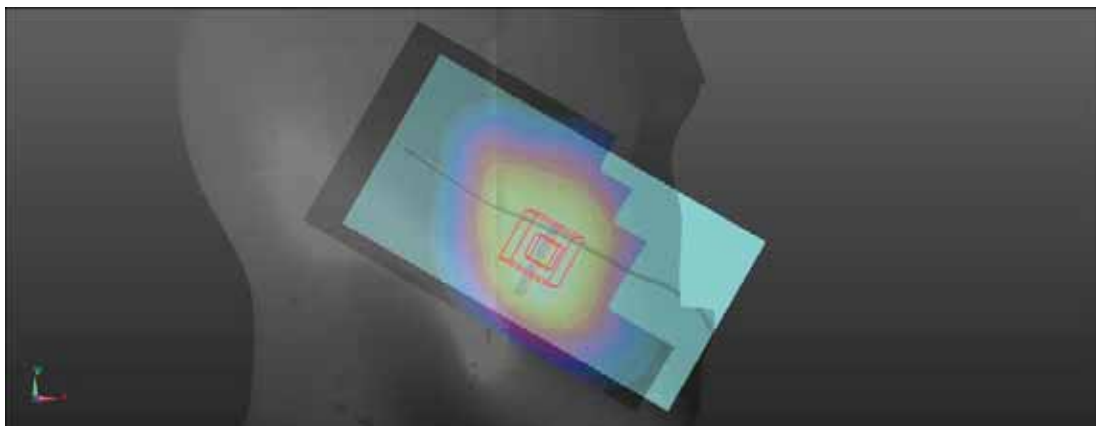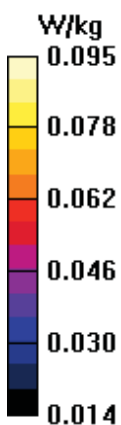

Test Laboratory:BACL.SAR TestingLab

62_LTE FDD Band 12_10M_QPSK_50%RB_0Offset_Head Left Tilt_Ch 23095

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz;Duty Cycle: 1:1
Medium: HSL_750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.554$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 707.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0525 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.881 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.0570 W/kg

SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.036 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 80%

Maximum value of SAR (measured) = 0.0529 W/kg

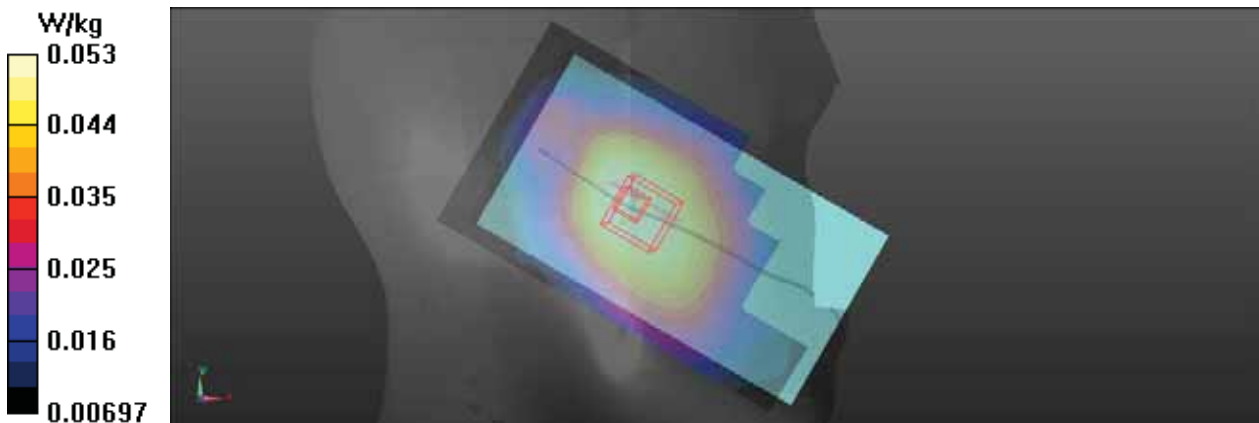

Test Laboratory: BACL SAR Testing Lab

63_LTE FDD Band 12_10M_QPSK_50%RB_0Offset_Head Right Check_Ch 23095

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL_750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.554$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 707.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.100 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.23 V/m; Power Drift = 0.04 dB



Peak SAR (extrapolated) = 0.107 W/kg

SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.067 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 80%

Maximum value of SAR (measured) = 0.0978 W/kg

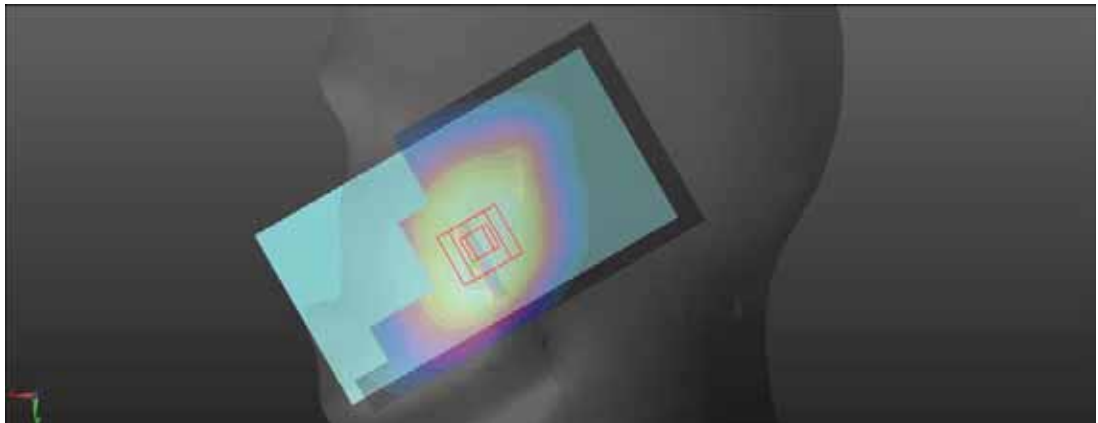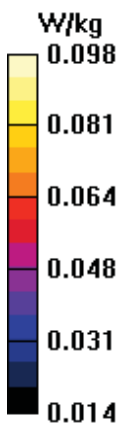

Test Laboratory: BACL SAR Testing Lab

64_LTE FDD Band 12_10M_QPSK_50%RB_0Offset_Head Right Tilt_Ch 23095

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL_750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.554$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 707.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0511 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.550 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.0540 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.034 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 80.4%

Maximum value of SAR (measured) = 0.0501 W/kg

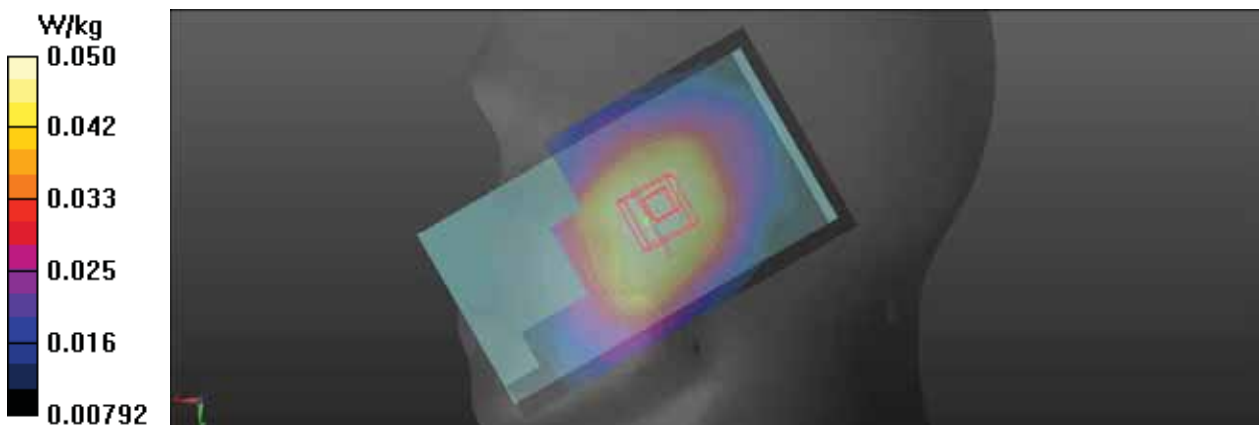

Test Laboratory: BACL SAR Testing Lab

65_LTE FDD Band 12_10M_QPSK_1RB_0Offset_Head Right Check_Ch 23095

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL_750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.554$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 707.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.128 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.71 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.134 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.085 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 80.3%

Maximum value of SAR (measured) = 0.124 W/kg

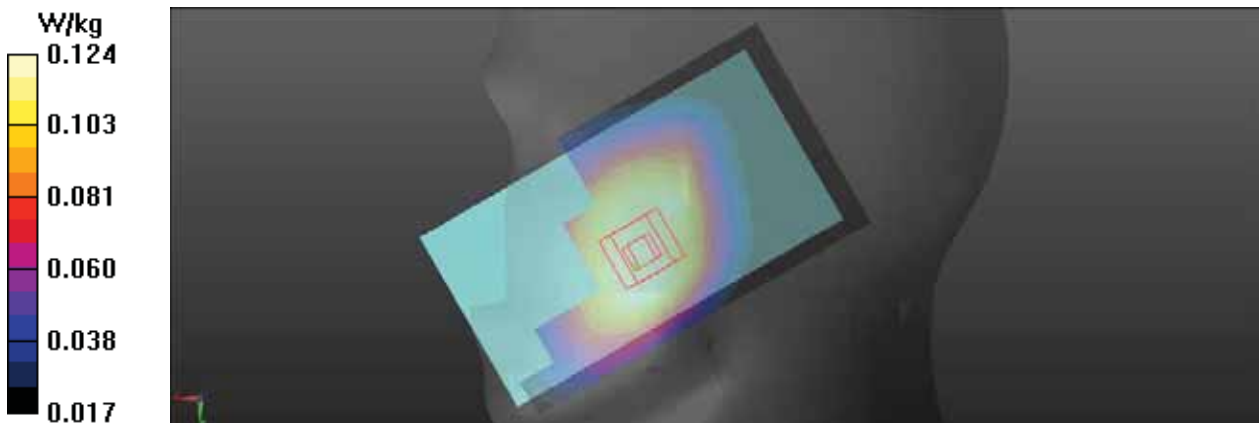

Test Laboratory: BACL SAR Testing Lab

226_LTE FDD Band 12_10M_QPSK_1RB_0Offset_Body Front_Ch 23095

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.554$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 707.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.223 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.58 V/m; Power Drift = -0.02 dB



Peak SAR (extrapolated) = 0.243 W/kg

SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.137 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 73.8%

Maximum value of SAR (measured) = 0.221 W/kg

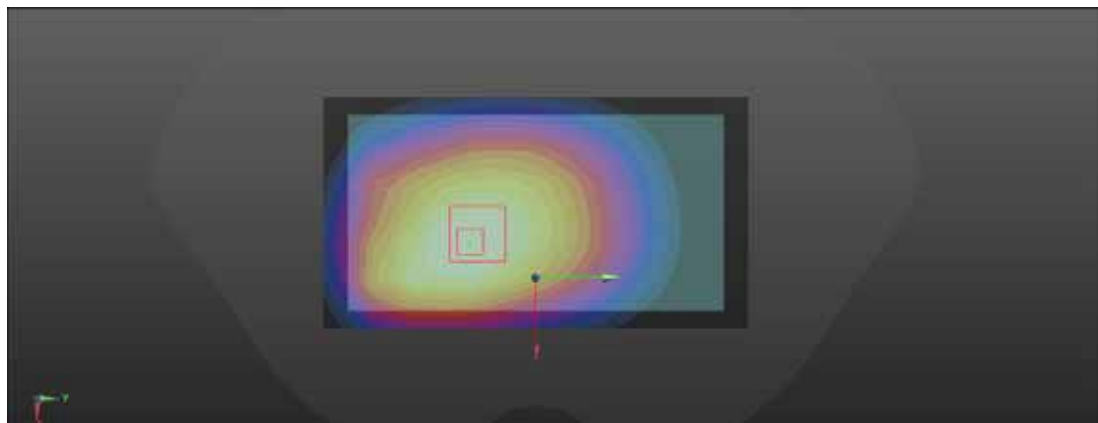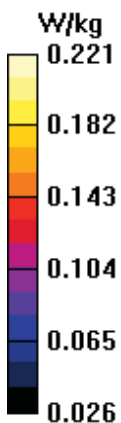

Test Laboratory: BACL SAR Testing Lab

227_LTE FDD Band 12_10M_QPSK_1RB_0Offset_Body Back_Ch 23095

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.554$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 707.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.151 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.65 V/m; Power Drift = -0.04 dB



Peak SAR (extrapolated) = 0.165 W/kg

SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.091 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 74.2%

Maximum value of SAR (measured) = 0.150 W/kg

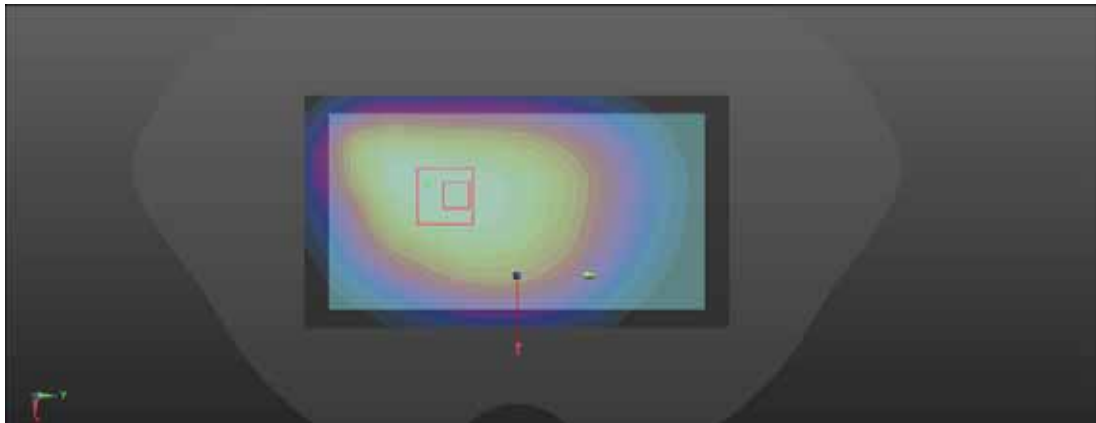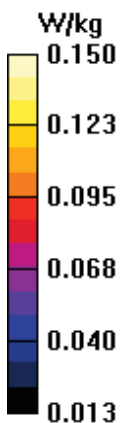

Test Laboratory: BACL SAR Testing Lab

228_LTE FDD Band 12_10M_QPSK_1RB_0Offset_Body Left_Ch 23095

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.554$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 707.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (21x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.125 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.13 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.069 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 69.5%

Maximum value of SAR (measured) = 0.125 W/kg

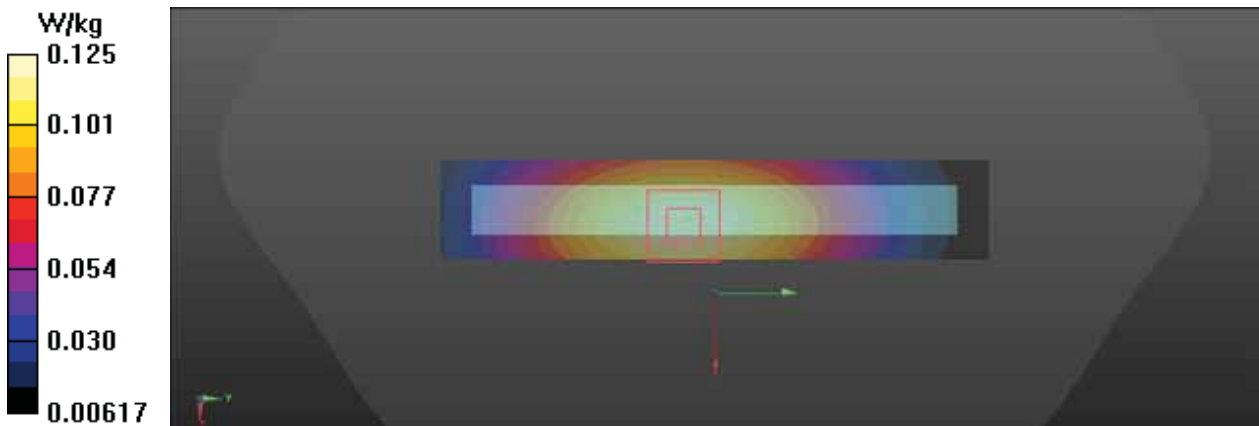

Test Laboratory: BACL SAR Testing Lab

229_LTE FDD Band 12_10M_QPSK_1RB_0Offset_Body Right_Ch 23095

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.554$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 707.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (21x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.157 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.67 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.185 W/kg

SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.087 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 66.9%

Maximum value of SAR (measured) = 0.162 W/kg

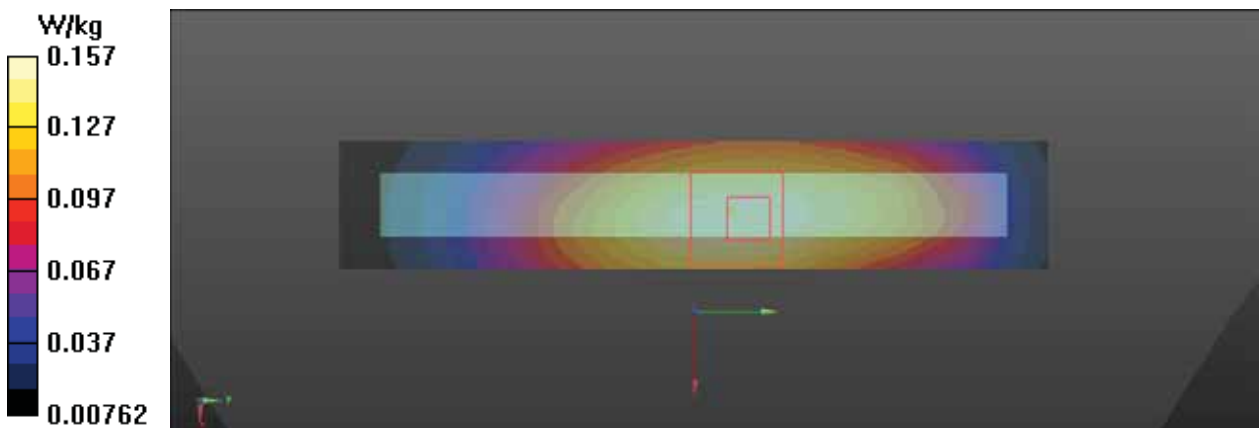

Test Laboratory:BACL.SAR TestingLab

230_LTE FDD Band 12_10M_QPSK_1RB_0Offset_Body Bottom_Ch 23095

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.554$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 707.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (21x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0468 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.286 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.0690 W/kg

SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.017 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 42.1%

Maximum value of SAR (measured) = 0.0474 W/kg

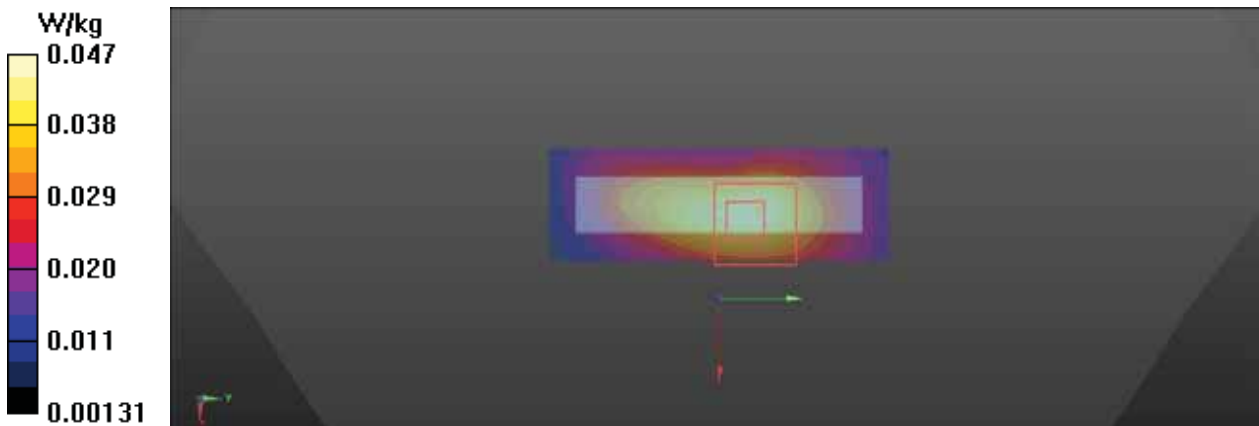

Test Laboratory: BACL SAR Testing Lab

231_LTE FDD Band 12_10M_QPSK_50%RB_0Offset_Body Front_Ch 23095

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.554$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 707.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.175 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.81 V/m; Power Drift = -0.01 dB



Peak SAR (extrapolated) = 0.193 W/kg

SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.109 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 75%

Maximum value of SAR (measured) = 0.177 W/kg

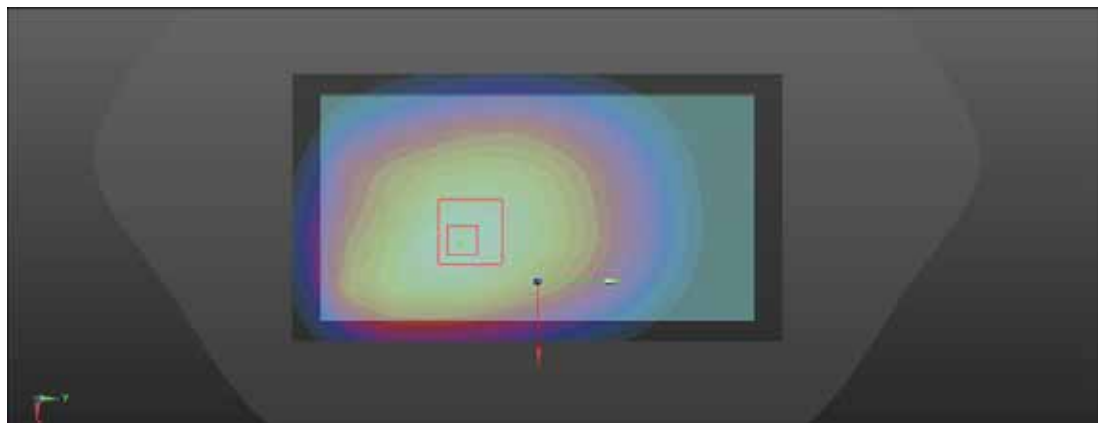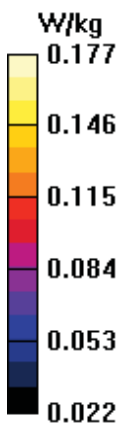

Test Laboratory: BACL SAR Testing Lab

232_LTE FDD Band 12_10M_QPSK_50%RB_0Offset_Body Back_Ch 23095

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.554$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 707.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.119 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.01 V/m; Power Drift = -0.01 dB



Peak SAR (extrapolated) = 0.131 W/kg

SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.072 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 72%

Maximum value of SAR (measured) = 0.119 W/kg

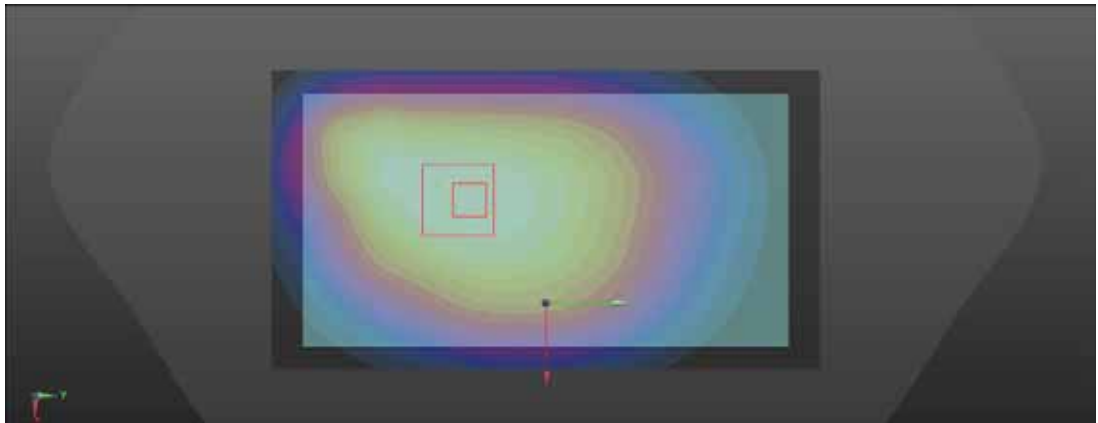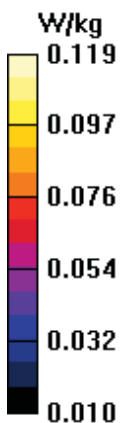

Test Laboratory: BACL SAR Testing Lab

233_LTE FDD Band 12_10M_QPSK_50%RB_0Offset_Body Left_Ch 23095

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.554$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 707.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (21x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.102 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.99 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.117 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.056 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 69.1%

Maximum value of SAR (measured) = 0.104 W/kg

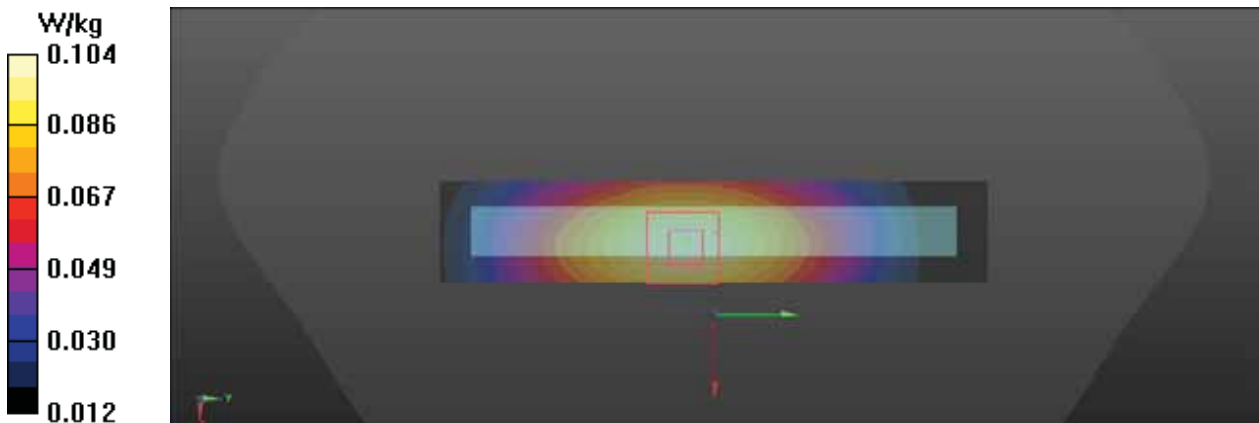

Test Laboratory: BACL SAR Testing Lab

234_LTE FDD Band 12_10M_QPSK_50%RB_0Offset_Body Right_Ch 23095

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.554$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 707.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (21x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.126 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.17 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.144 W/kg

SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.068 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 68.1%

Maximum value of SAR (measured) = 0.126 W/kg

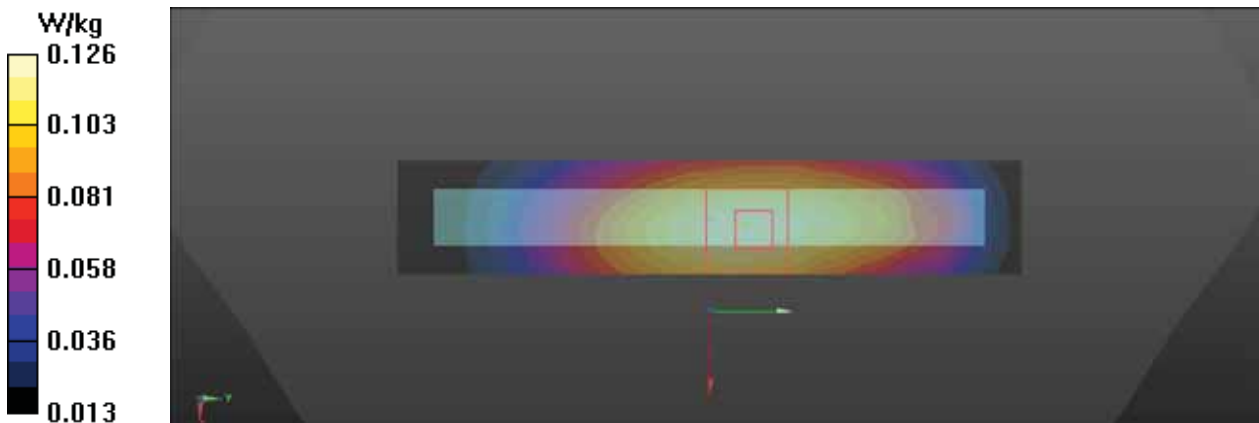

Test Laboratory: BACL SAR Testing Lab

235_LTE FDD Band 12_10M_QPSK_50%RB_0Offset_Body Bottom_Ch 23095

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.554$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 707.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (21x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0369 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.448 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.0550 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.013 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 42.2%

Maximum value of SAR (measured) = 0.0376 W/kg

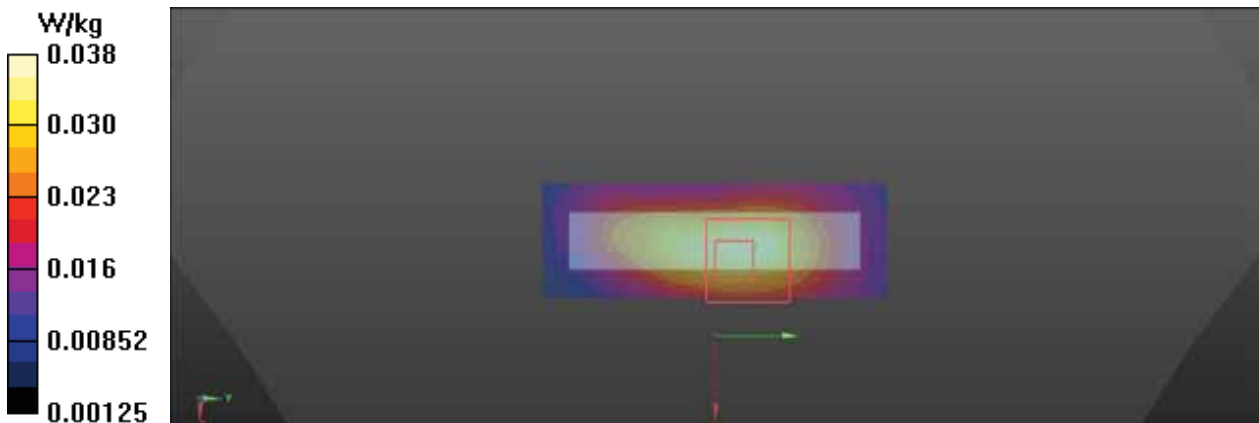

Test Laboratory: BACL SAR Testing Lab

237_LTE FDD Band 12_10M_QPSK_1RB_0Offset_Body Front_Ch 23095

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.554$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 707.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26860/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.222 W/kg

Ch26860/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.61 V/m; Power Drift = -0.04 dB



Peak SAR (extrapolated) = 0.243 W/kg

SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.136 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 74.3%

Maximum value of SAR (measured) = 0.222 W/kg

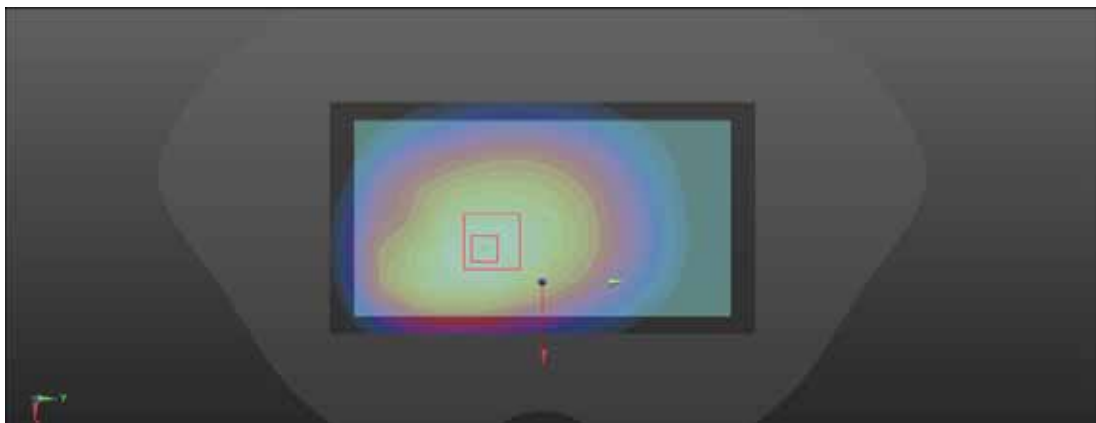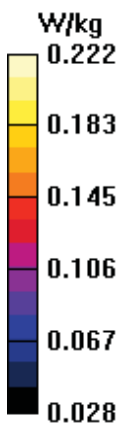

Test Laboratory: BACL SAR Testing Lab

236_LTE FDD Band 12_10M_QPSK_1RB_0Offset_Body Handheld Front_Ch 23095

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.554$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 707.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.17 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.09 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.492 W/kg; SAR(10 g) = 0.263 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 37%

Maximum value of SAR (measured) = 0.885 W/kg

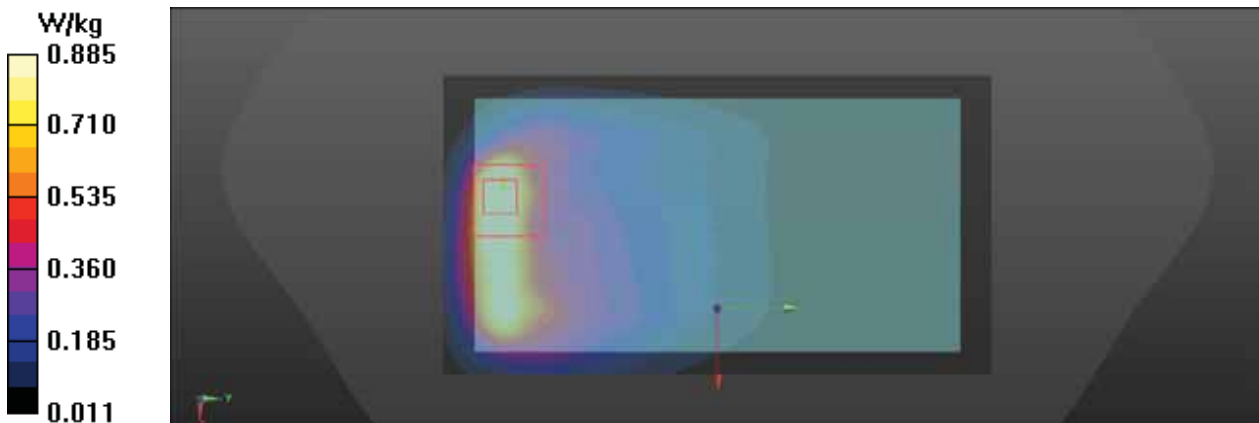

Test Laboratory:BACL.SAR TestingLab

66_LTE FDD Band 17_10M_QPSK_1RB_0Offset_Head Left Cheek_Ch 23790

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 710 MHz;Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.543$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 710 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch23790/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.118 W/kg

Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.95 V/m; Power Drift = 0.03 dB



Peak SAR (extrapolated) = 0.124 W/kg

SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.080 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 81.1%

Maximum value of SAR (measured) = 0.116 W/kg

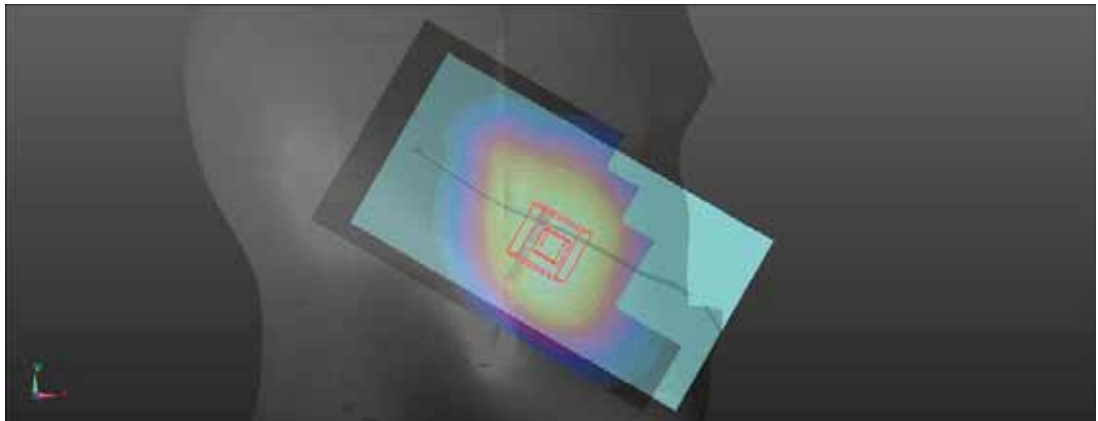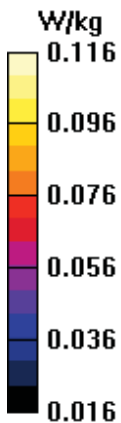

Test Laboratory:BACL.SAR TestingLab

67_LTE FDD Band 17_10M_QPSK_1RB_0Offset_Head Left Tilt_Ch 23790

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 710 MHz;Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.543$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 710 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch23790/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0644 W/kg

Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.452 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.0690 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.045 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 81.6%

Maximum value of SAR (measured) = 0.0653 W/kg

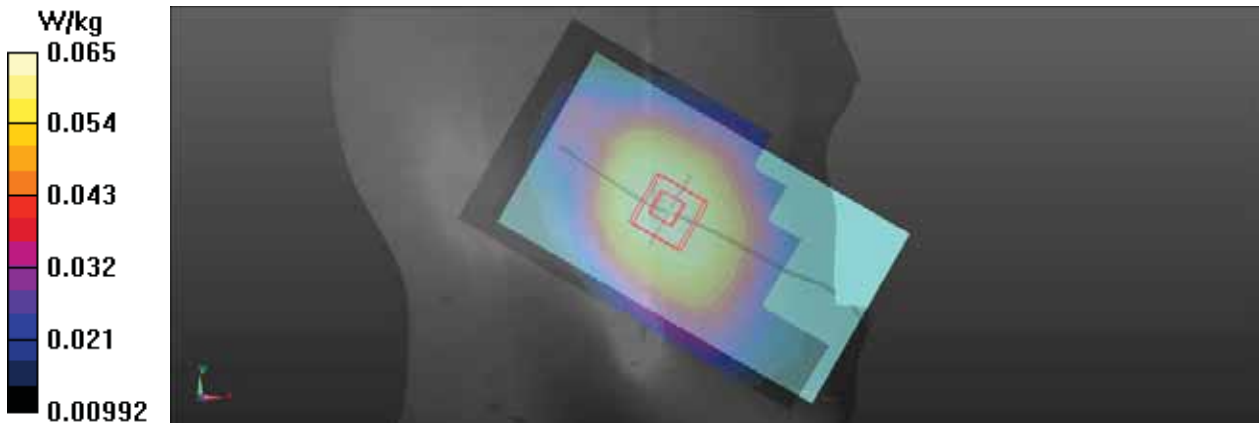

Test Laboratory: BACL SAR Testing Lab

68_LTE FDD Band 17_10M_QPSK_1RB_0Offset_Head Right Check_Ch 23790

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.543$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 710 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23790/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.124 W/kg

Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.38 V/m; Power Drift = 0.08 dB



Peak SAR (extrapolated) = 0.134 W/kg

SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.082 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 79.1%

Maximum value of SAR (measured) = 0.122 W/kg

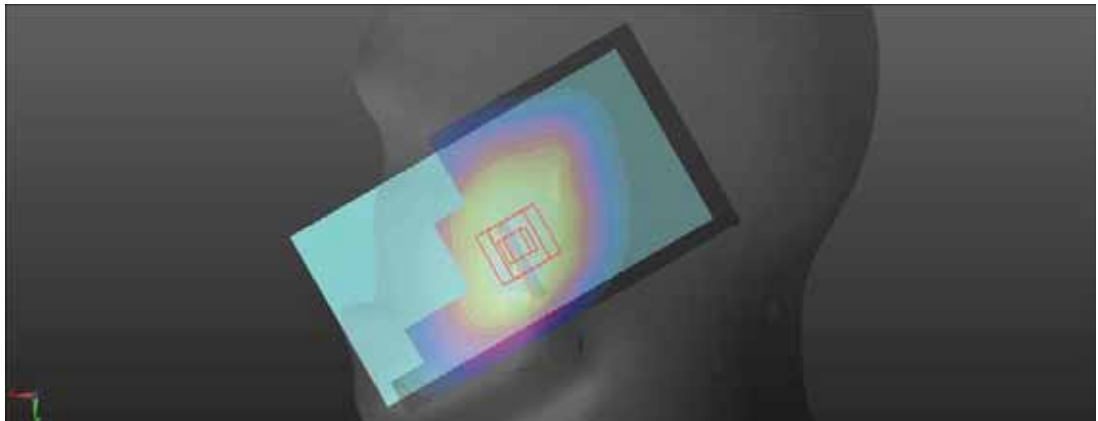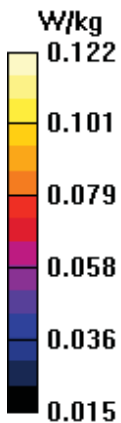

Test Laboratory:BACL.SAR TestingLab

69_LTE FDD Band 17_10M_QPSK_1RB_0Offset_Head Right Tilt_Ch 23790

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 710 MHz;Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.543$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 710 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch23790/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0604 W/kg

Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.323 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.0650 W/kg

SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.041 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 79.8%

Maximum value of SAR (measured) = 0.0604 W/kg

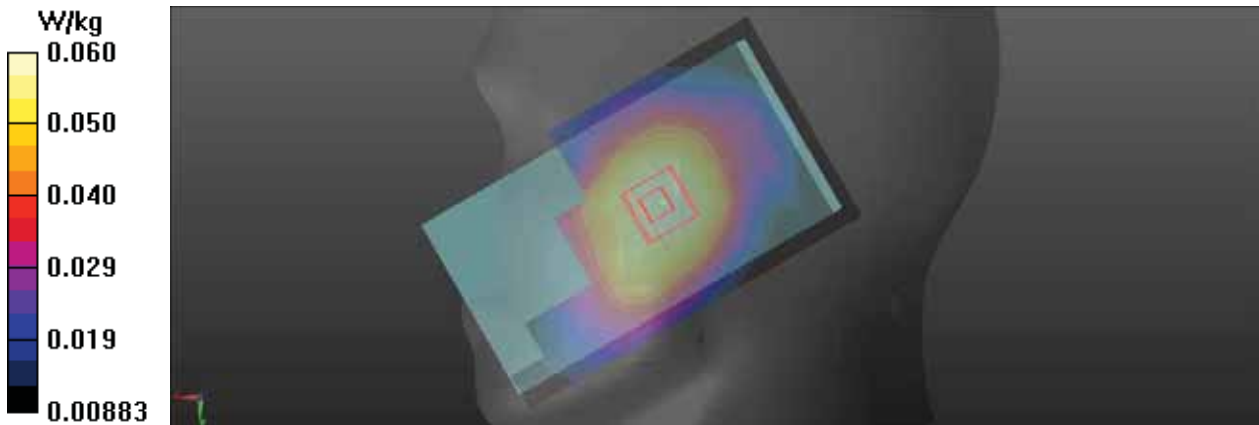

Test Laboratory:BACL.SAR TestingLab

70_LTE FDD Band 17_10M_QPSK_50%RB_0Offset_Head Left Cheek_Ch 23790

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 710 MHz;Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.543$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 710 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch23790/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.103 W/kg

Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.17 V/m; Power Drift = 0.06 dB



Peak SAR (extrapolated) = 0.108 W/kg

SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.070 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 81.3%

Maximum value of SAR (measured) = 0.101 W/kg

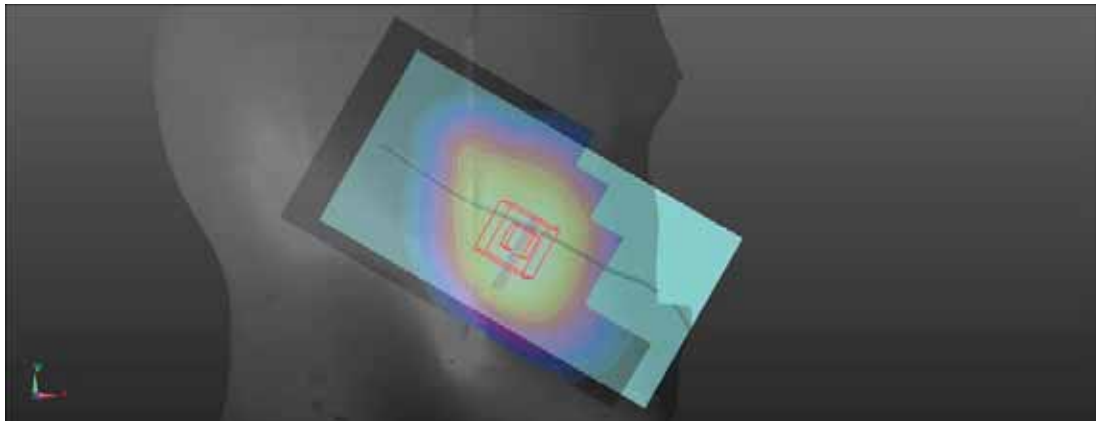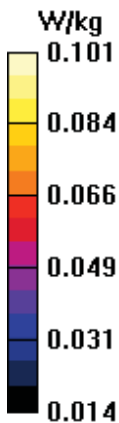

Test Laboratory:BACL.SAR TestingLab

71_LTE FDD Band 17_10M_QPSK_50%RB_0Offset_Head Left Tilt_Ch 23790

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 710 MHz;Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.543$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 710 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch23790/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0563 W/kg

Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.908 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.0620 W/kg

SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.039 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 78.8%

Maximum value of SAR (measured) = 0.0579 W/kg

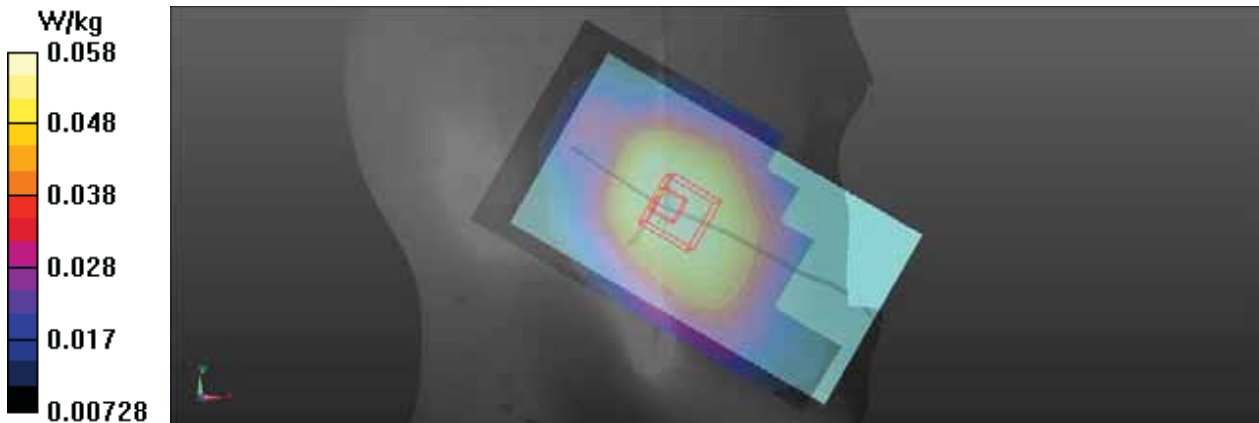

Test Laboratory:BACL.SAR TestingLab

72_LTE FDD Band 17_10M_QPSK_50%RB_0Offset_Head Right Check_Ch 23790

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 710 MHz;Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.543$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 710 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch23790/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.110 W/kg

Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.71 V/m; Power Drift = 0.02 dB



Peak SAR (extrapolated) = 0.118 W/kg

SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.073 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 79%

Maximum value of SAR (measured) = 0.109 W/kg

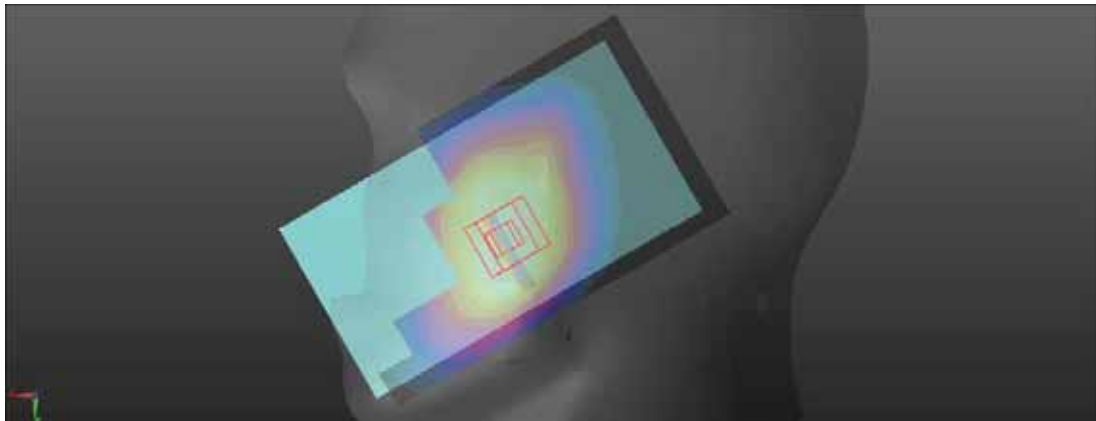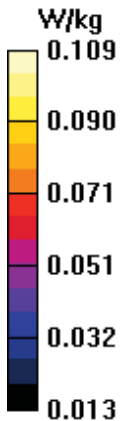

Test Laboratory:BACL.SAR TestingLab

73_LTE FDD Band 17_10M_QPSK_50%RB_0Offset_Head Right Tilt_Ch 23790

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 710 MHz;Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.543$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 710 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch23790/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0553 W/kg

Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.885 V/m; Power Drift = 0.03 dB



Peak SAR (extrapolated) = 0.0580 W/kg

SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.037 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 81.4%

Maximum value of SAR (measured) = 0.0543 W/kg

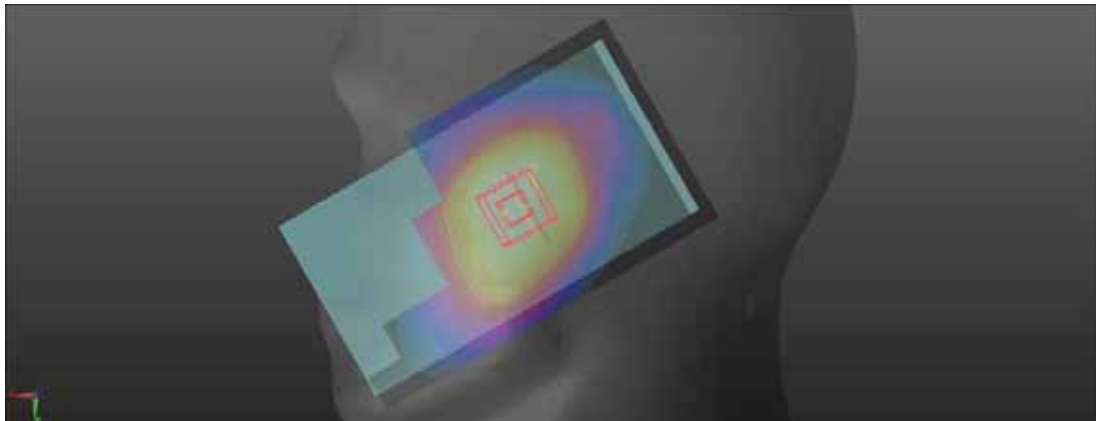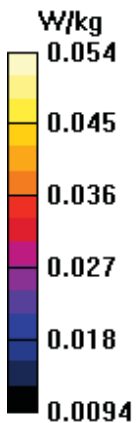

Test Laboratory: BACL SAR Testing Lab

74_LTE FDD Band 17_10M_QPSK_1RB_0Offset_Head Right Check_Ch 23790

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.543$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 710 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23790/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.124 W/kg

Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.49 V/m; Power Drift = 0.06 dB



Peak SAR (extrapolated) = 0.131 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.082 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 79.9%

Maximum value of SAR (measured) = 0.120 W/kg

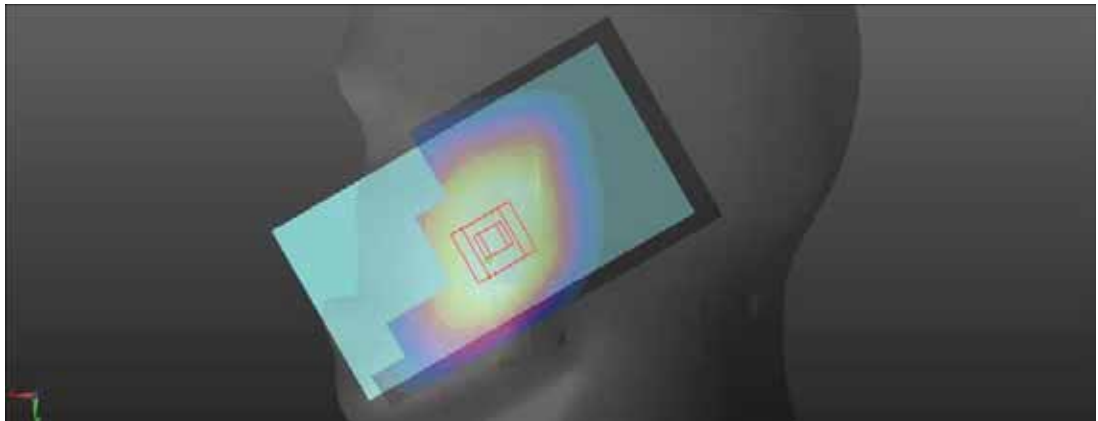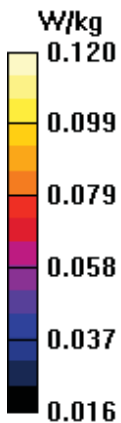

Test Laboratory: BACL SAR Testing Lab

238_LTE FDD Band 17_10M_QPSK_1RB_0Offset_Body Front_Ch 23790

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.543$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 710 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23790/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.209 W/kg

Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.02 V/m; Power Drift = 0.02 dB



Peak SAR (extrapolated) = 0.230 W/kg

SAR(1 g) = 0.173 W/kg; SAR(10 g) = 0.131 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 75.5%

Maximum value of SAR (measured) = 0.209 W/kg

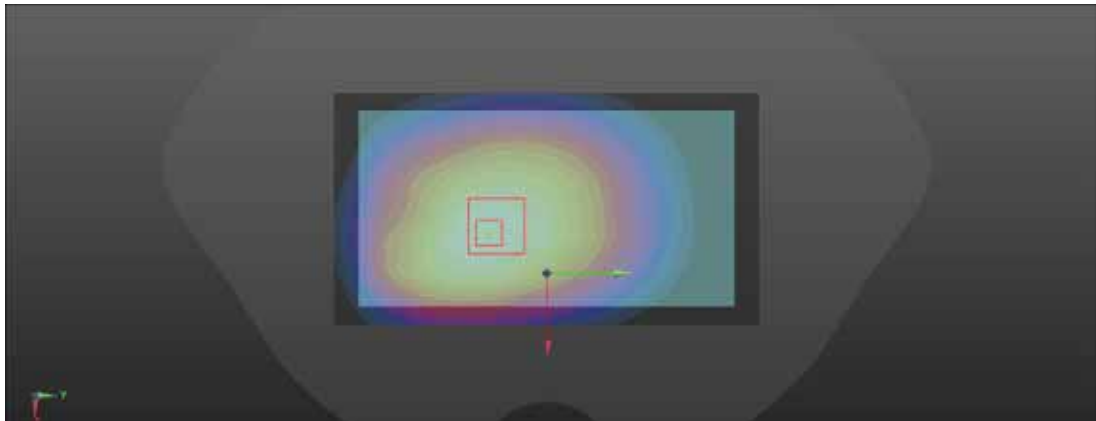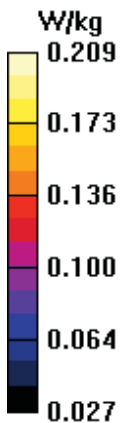

Test Laboratory: BACL SAR Testing Lab

239_LTE FDD Band 17_10M_QPSK_1RB_0Offset_Body Back_Ch 23790

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.543$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 710 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23790/Area Scan (61x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.145 W/kg

Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.36 V/m; Power Drift = -0.01 dB



Peak SAR (extrapolated) = 0.159 W/kg

SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.088 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 72.5%

Maximum value of SAR (measured) = 0.144 W/kg

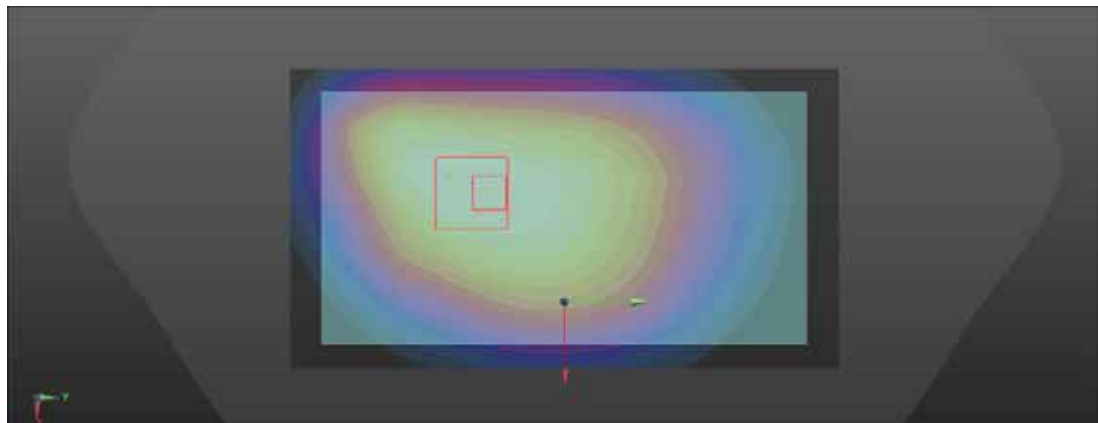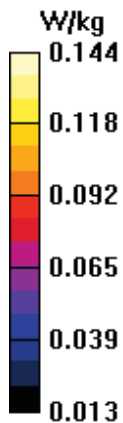

Test Laboratory: BACL SAR Testing Lab

240_LTE FDD Band 17_10M_QPSK_1RB_0Offset_Body Left_Ch 23790

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.543$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 710 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23790/Area Scan (21x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.123 W/kg

Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.08 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.096 W/kg; SAR(10 g) = 0.067 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 69%

Maximum value of SAR (measured) = 0.123 W/kg

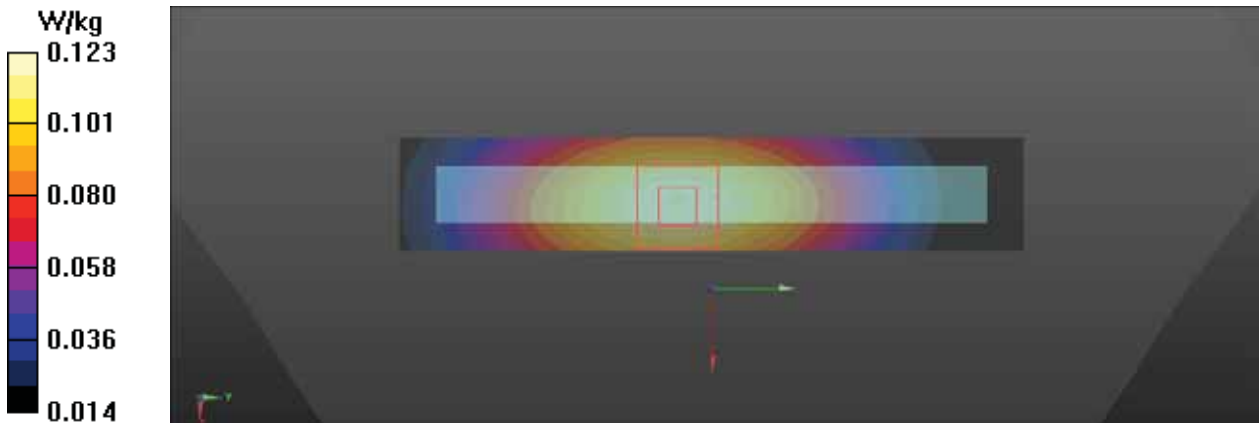

Test Laboratory: BACL SAR Testing Lab

241_LTE FDD Band 17_10M_QPSK_1RB_0Offset_Body Right_Ch 23790

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.543$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 710 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23790/Area Scan (21x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.153 W/kg

Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.41 V/m; Power Drift = -0.05 dB



Peak SAR (extrapolated) = 0.173 W/kg

SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.083 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 67.7%

Maximum value of SAR (measured) = 0.153 W/kg

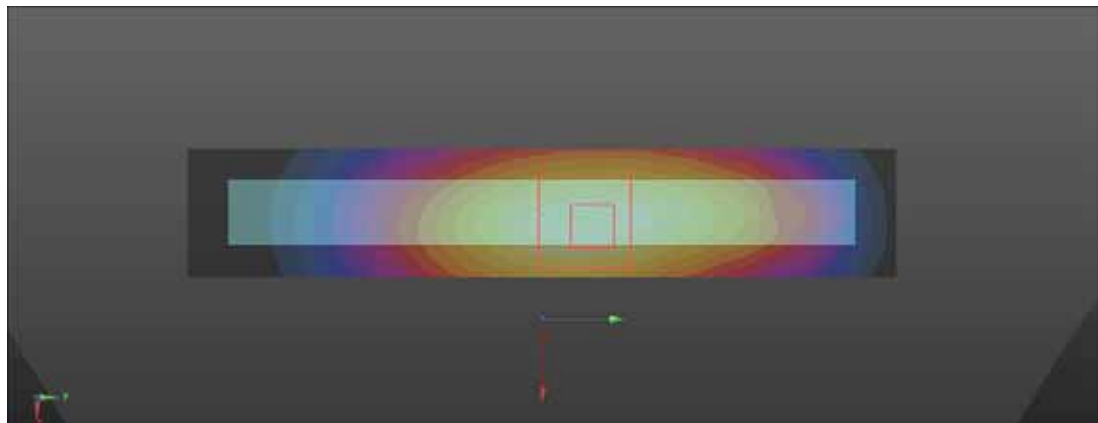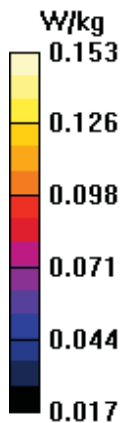

Test Laboratory: BACL SAR Testing Lab

242_LTE FDD Band 17_10M_QPSK_1RB_0Offset_Body Bottom_Ch 23790

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.543$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 710 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23790/Area Scan (21x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0452 W/kg

Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.323 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.0670 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.016 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 43.3%

Maximum value of SAR (measured) = 0.0458 W/kg

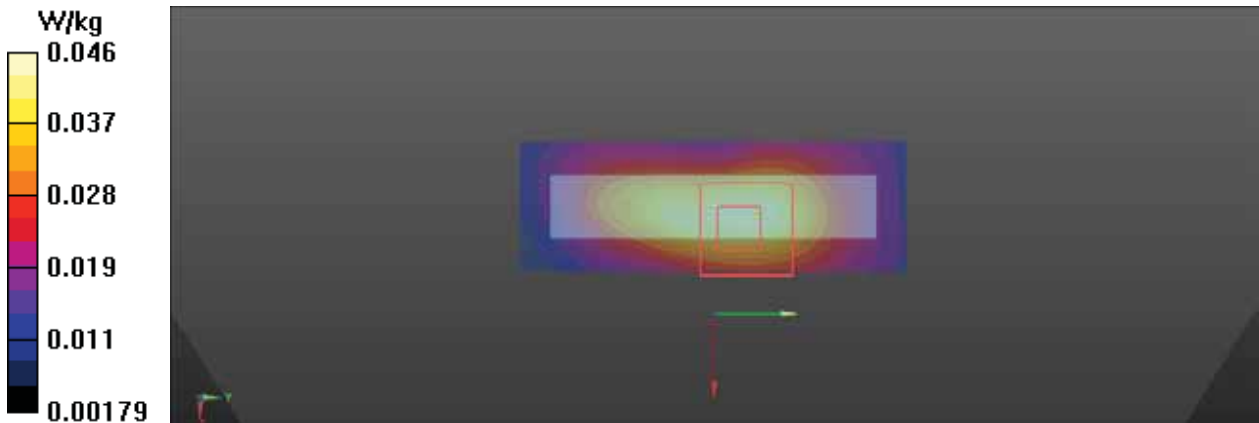

Test Laboratory: BACL SAR Testing Lab

243_LTE FDD Band 17_10M_QPSK_50%RB_0Offset_Body Front_Ch 23790

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.543$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 710 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23790/Area Scan (61x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.182 W/kg

Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 14.89 V/m; Power Drift = 0.03 dB



Peak SAR (extrapolated) = 0.199 W/kg

SAR(1 g) = 0.149 W/kg; SAR(10 g) = 0.113 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 74.9%

Maximum value of SAR (measured) = 0.182 W/kg

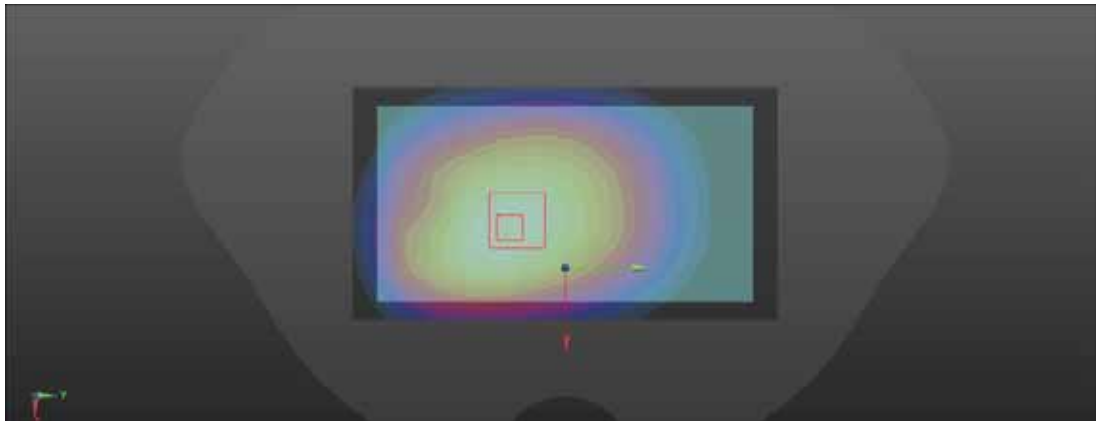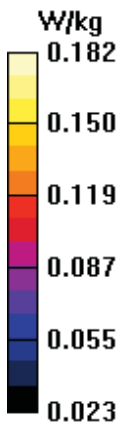

Test Laboratory: BACL SAR Testing Lab

244_LTE FDD Band 17_10M_QPSK_50%RB_0Offset_Body Back_Ch 23790

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.543$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 710 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23790/Area Scan (61x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.127 W/kg

Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.45 V/m; Power Drift = 0.04 dB



Peak SAR (extrapolated) = 0.139 W/kg

SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.077 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 72.3%

Maximum value of SAR (measured) = 0.126 W/kg

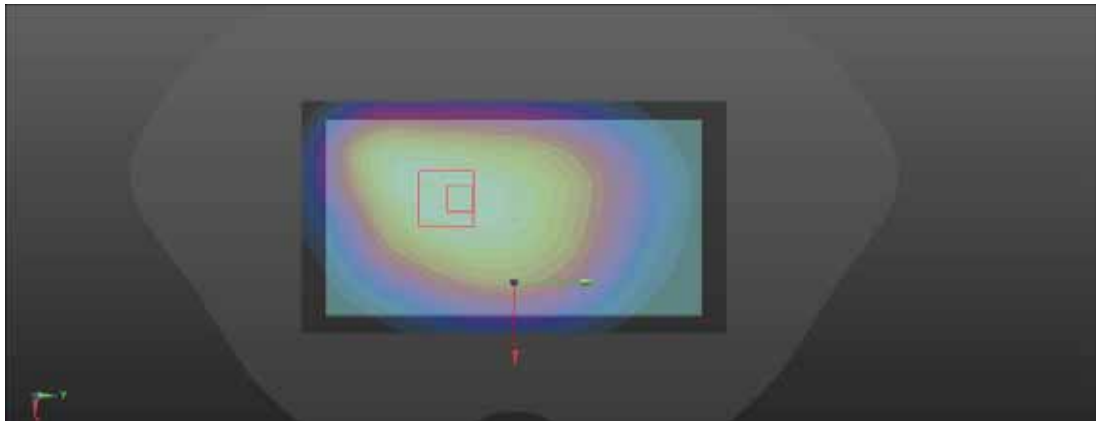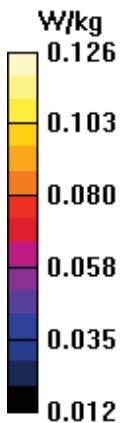

Test Laboratory: BACL SAR Testing Lab

245_LTE FDD Band 17_10M_QPSK_50RB_0Offset_Body Left_Ch 23790

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.543$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 710 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23790/Area Scan (21x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.110 W/kg

Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.46 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.125 W/kg

SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.060 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 68.3%

Maximum value of SAR (measured) = 0.112 W/kg

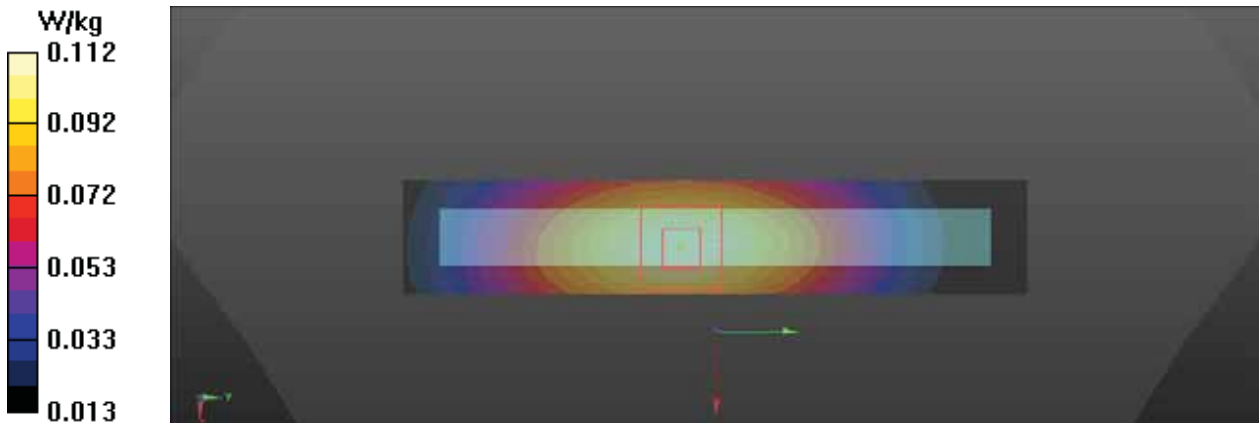

Test Laboratory: BACL SAR Testing Lab

246_LTE FDD Band 17_10M_QPSK_50%RB_0Offset_Body Right_Ch 23790

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.543$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 710 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23790/Area Scan (21x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.137 W/kg

Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.65 V/m; Power Drift = -0.03 dB



Peak SAR (extrapolated) = 0.153 W/kg

SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.073 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 68.6%

Maximum value of SAR (measured) = 0.135 W/kg

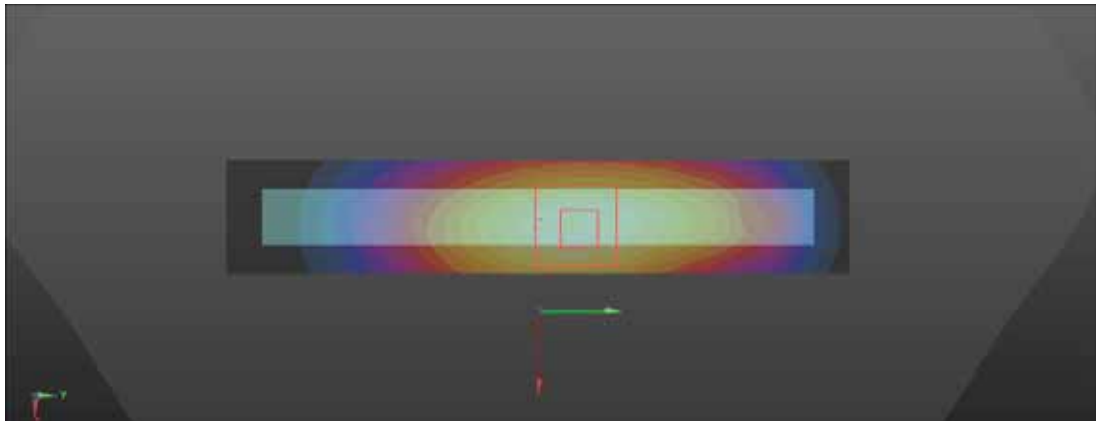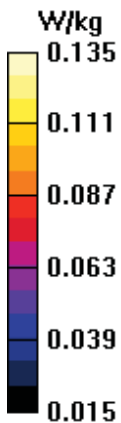

Test Laboratory:BACL.SAR TestingLab

247_LTE FDD Band 17_10M_QPSK_50RB_0Offset_Body Bottom_Ch 23790

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 710 MHz;Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.543$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 710 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch23790/Area Scan (21x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0408 W/kg

Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.990 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.0580 W/kg

SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.015 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 45%

Maximum value of SAR (measured) = 0.0406 W/kg

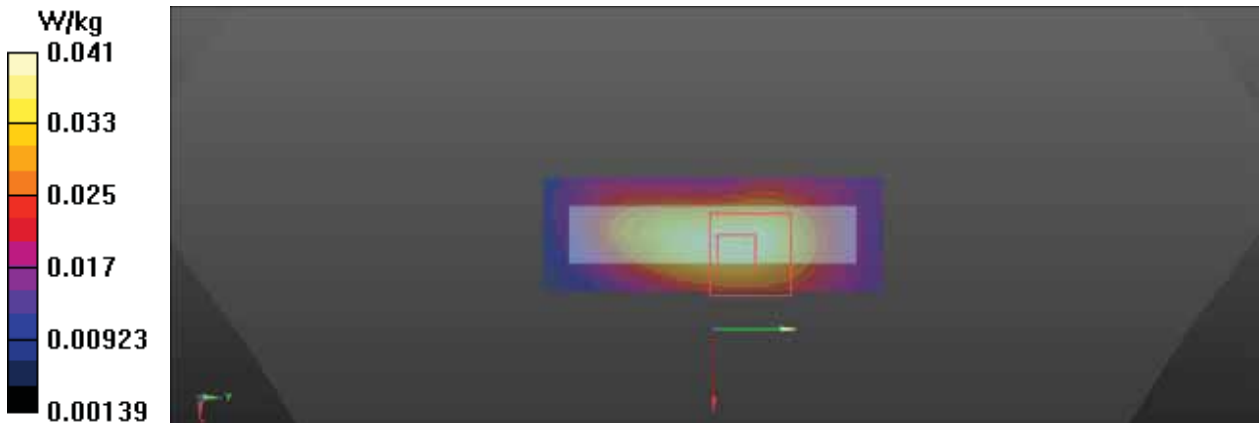

Test Laboratory: BACL SAR Testing Lab

249_LTE FDD Band 17_10M_QPSK_1RB_0Offset_Body Front_Ch 23790

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.543$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 710 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23790/Area Scan (61x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.207 W/kg

Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.93 V/m; Power Drift = -0.03 dB



Peak SAR (extrapolated) = 0.224 W/kg

SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.128 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 74.8%

Maximum value of SAR (measured) = 0.205 W/kg

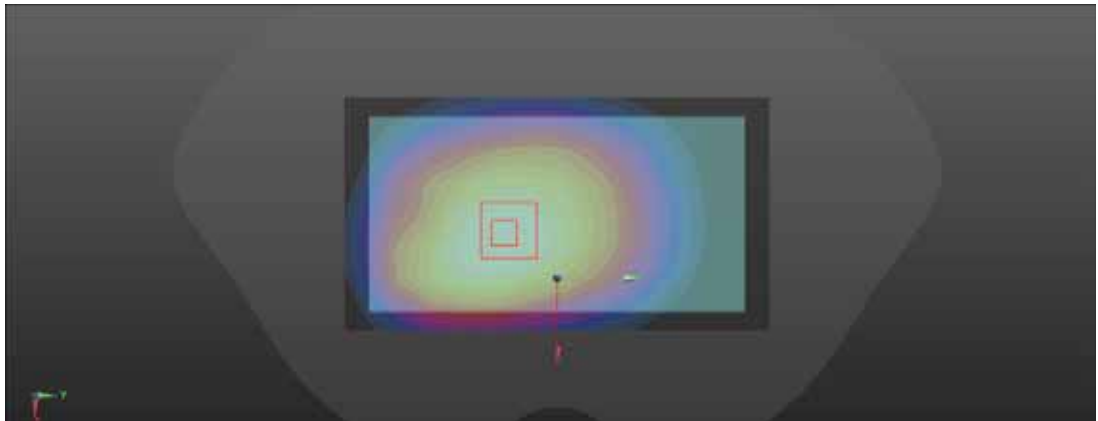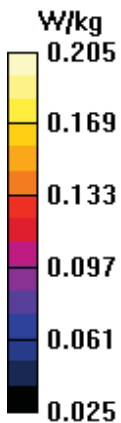

Test Laboratory: BACL SAR Testing Lab

248_LTE FDD Band 17_10M_QPSK_1RB_0Offset_Body Handheld Front_Ch 23790

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 710$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.543$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 710 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23790/Area Scan (61x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.22 W/kg

Ch23790/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 35.18 V/m; Power Drift = -0.01 dB



Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 0.572 W/kg; SAR(10 g) = 0.298 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 32.4%

Maximum value of SAR (measured) = 1.19 W/kg

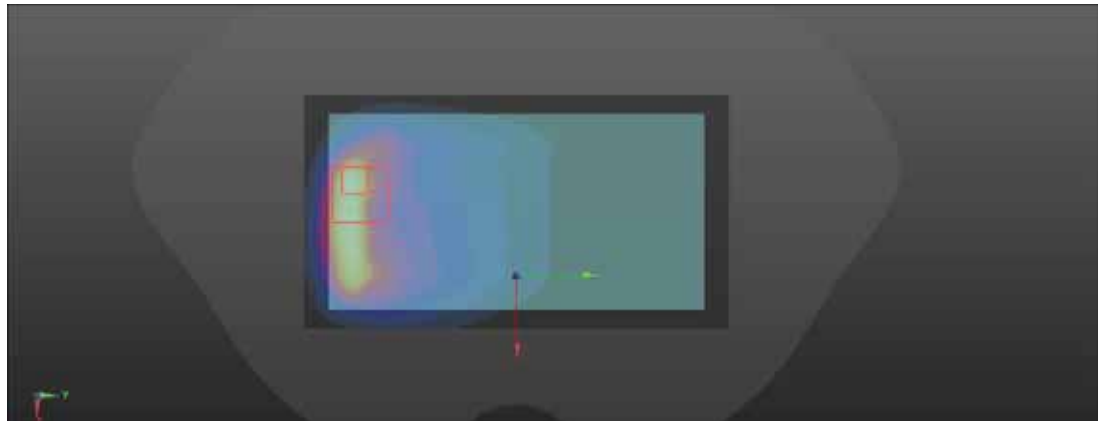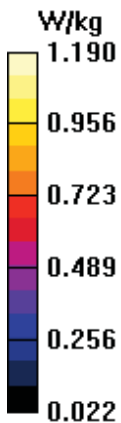

Test Laboratory: BACL SAR Testing Lab

84_LTE FDD Band 25_20M_QPSK_1RB_0Offset_Head Left Check_Ch 26365

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 38.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1882.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26365/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.181 W/kg

Ch26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.61 V/m; Power Drift = 0.08 dB



Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.077 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 66%

Maximum value of SAR (measured) = 0.166 W/kg

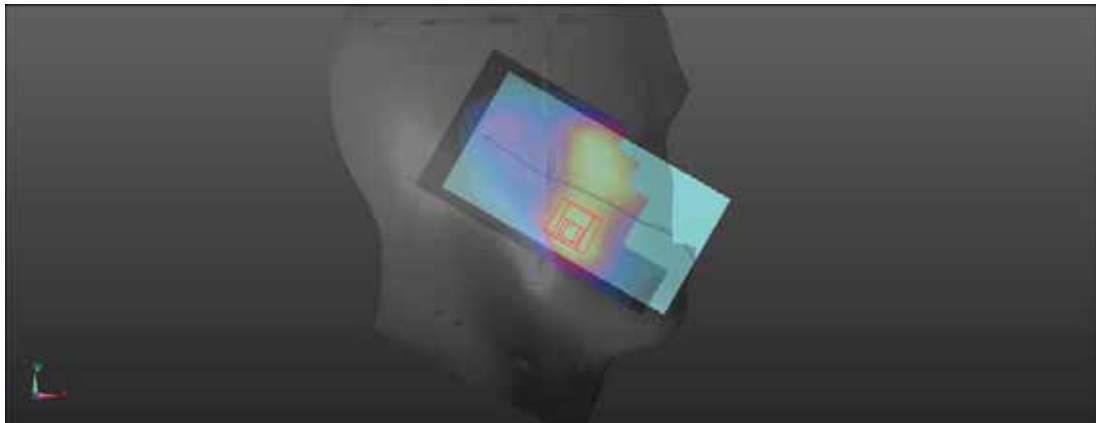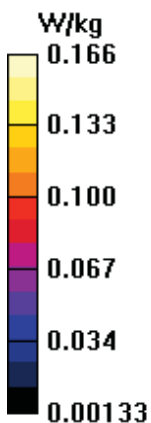

Test Laboratory:BACL.SAR TestingLab

85_LTE FDD Band 25_20M_QPSK_1RB_0Offset_Head Left Tilt_Ch 26365

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 38.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1882.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch26365/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.140 W/kg

Ch26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.060 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 0.163 W/kg
SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.057 W/kg
Smallest distance from peaks to all points 3 dB below = 12.9 mm
Ratio of SAR at M2 to SAR at M1 = 62.9%
Maximum value of SAR (measured) = 0.141 W/kg



Test Laboratory: BACL SAR Testing Lab

86_LTE FDD Band 25_20M_QPSK_1RB_0Offset_Head Right Check_Ch 26365

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 38.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1882.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26365/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.353 W/kg

Ch26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.90 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.390 W/kg
SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.150 W/kg
Smallest distance from peaks to all points 3 dB below = 15.5 mm
Ratio of SAR at M2 to SAR at M1 = 62.8%
Maximum value of SAR (measured) = 0.338 W/kg

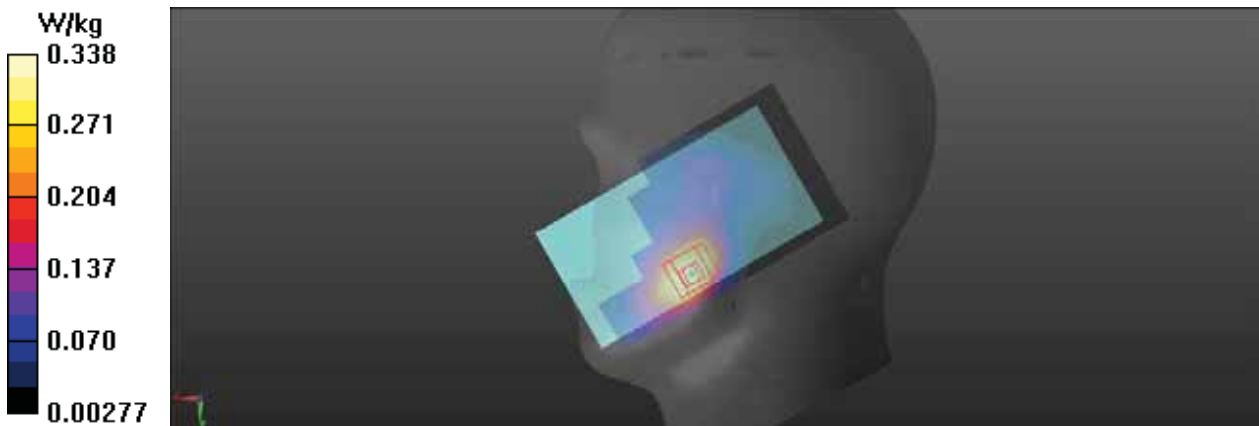

Test Laboratory:BACL.SAR TestingLab

87_LTE FDD Band 25_20M_QPSK_1RB_0Offset_Head Right Tilt_Ch 26365

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 38.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1882.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch26365/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.122 W/kg

Ch26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.358 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.148 W/kg

SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.054 W/kg

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 60.2%

Maximum value of SAR (measured) = 0.125 W/kg

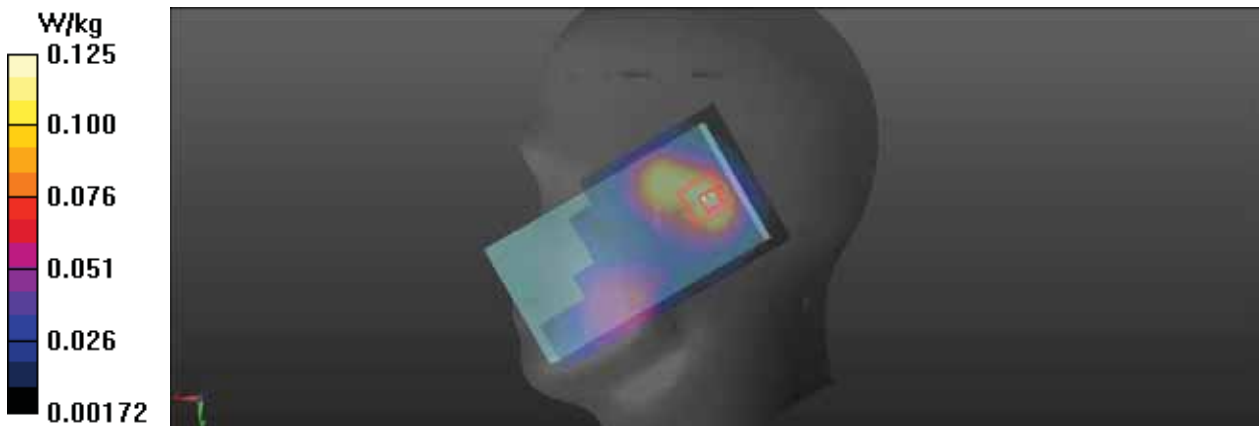

Test Laboratory:BACL.SAR TestingLab

88_LTE FDD Band 25_20M_QPSK_50%RB_0Offset_Head Left Check_Ch 26365

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 38.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1882.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch26365/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.153 W/kg

Ch26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.865 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.163 W/kg
SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.065 W/kg
Smallest distance from peaks to all points 3 dB below = 12.8 mm
Ratio of SAR at M2 to SAR at M1 = 64.6%
Maximum value of SAR (measured) = 0.140 W/kg

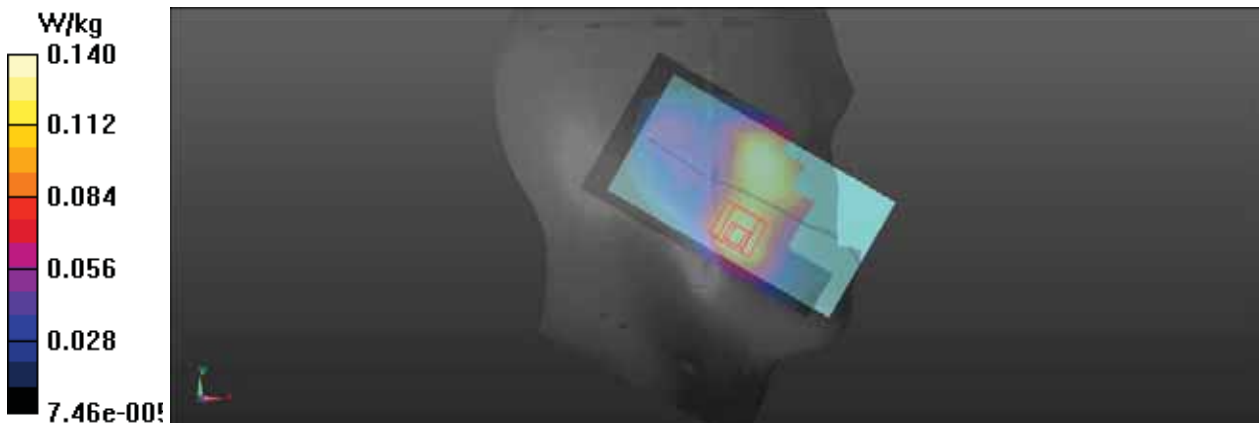

Test Laboratory: BACL SAR Testing Lab

89_LTE FDD Band 25_20M_QPSK_50%RB_0Offset_Head Left Tilt_Ch 26365

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 38.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1882.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26365/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.116 W/kg

Ch26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.294 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.141 W/kg
SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.048 W/kg
Smallest distance from peaks to all points 3 dB below = 12.8 mm
Ratio of SAR at M2 to SAR at M1 = 61.2%
Maximum value of SAR (measured) = 0.121 W/kg



Test Laboratory:BACL.SAR TestingLab

90_LTE FDD Band 25_20M_QPSK_50%RB_0Offset_Head Right Check_Ch 26365

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 38.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1882.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch26365/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.303 W/kg

Ch26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.92 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.339 W/kg
SAR(1 g) = 0.211 W/kg; SAR(10 g) = 0.129 W/kg
Smallest distance from peaks to all points 3 dB below = 15.5 mm
Ratio of SAR at M2 to SAR at M1 = 62.4%
Maximum value of SAR (measured) = 0.294 W/kg



Test Laboratory:BACL.SAR TestingLab

91_LTE FDD Band 25_20M_QPSK_50%RB_0Offset_Head Right Tilt_Ch 26365

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 38.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1882.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch26365/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.109 W/kg

Ch26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.807 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.124 W/kg
SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.046 W/kg
Smallest distance from peaks to all points 3 dB below = 16 mm
Ratio of SAR at M2 to SAR at M1 = 61.5%
Maximum value of SAR (measured) = 0.106 W/kg

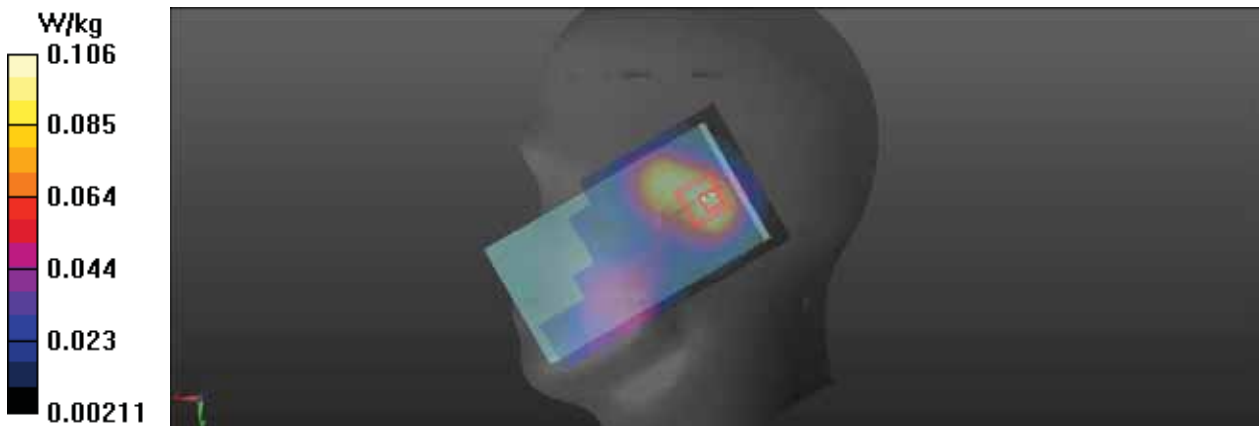

Test Laboratory:BACL.SAR TestingLab

92_LTE FDD Band 25_20M_QPSK_1RB_0Offset_Head Right Check_Ch 26365

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 38.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1882.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch26365/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.296 W/kg

Ch26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.68 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 0.321 W/kg
SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.124 W/kg
Smallest distance from peaks to all points 3 dB below = 15 mm
Ratio of SAR at M2 to SAR at M1 = 63%
Maximum value of SAR (measured) = 0.278 W/kg



Test Laboratory: BACL SAR Testing Lab

262_LTE FDD Band 25_20M_QPSK_1RB_0Offset_Body Front_Ch 26365

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 38.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1882.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 26365/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.452 W/kg

Ch 26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.15 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.493 W/kg
SAR(1 g) = 0.288 W/kg; SAR(10 g) = 0.179 W/kg
Smallest distance from peaks to all points 3 dB below = 19.3 mm
Ratio of SAR at M2 to SAR at M1 = 57%
Maximum value of SAR (measured) = 0.414 W/kg

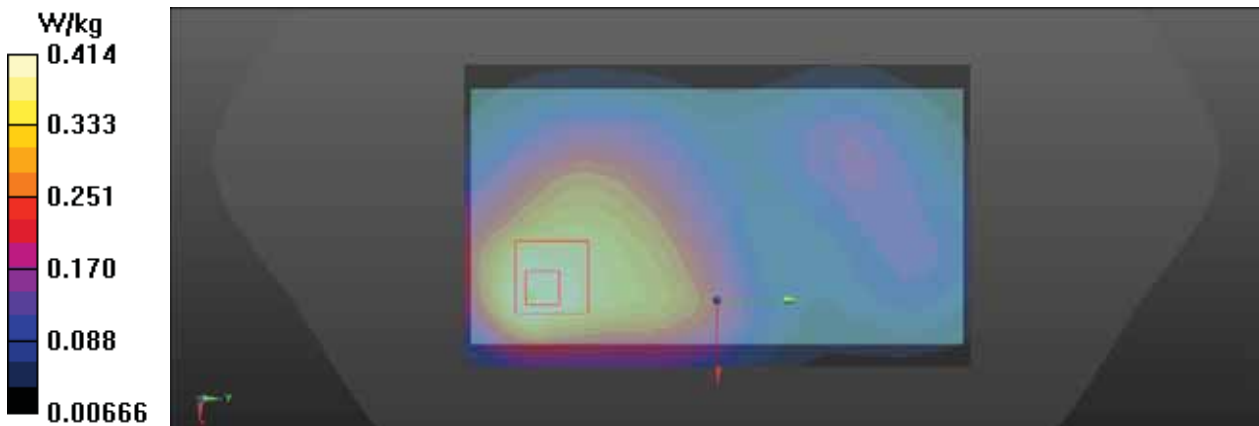

Test Laboratory: BACL SAR Testing Lab

263_LTE FDD Band 25_20M_QPSK_1RB_0Offset_Body Back_Ch 26365

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL 1900 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 38.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1882.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 26365/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.393 W/kg

Ch 26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.65 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.457 W/kg

SAR(1 g) = 0.266 W/kg; SAR(10 g) = 0.164 W/kg

Smallest distance from peaks to all points 3 dB below = 18.2 mm

Ratio of SAR at M2 to SAR at M1 = 57.6%

Maximum value of SAR (measured) = 0.381 W/kg

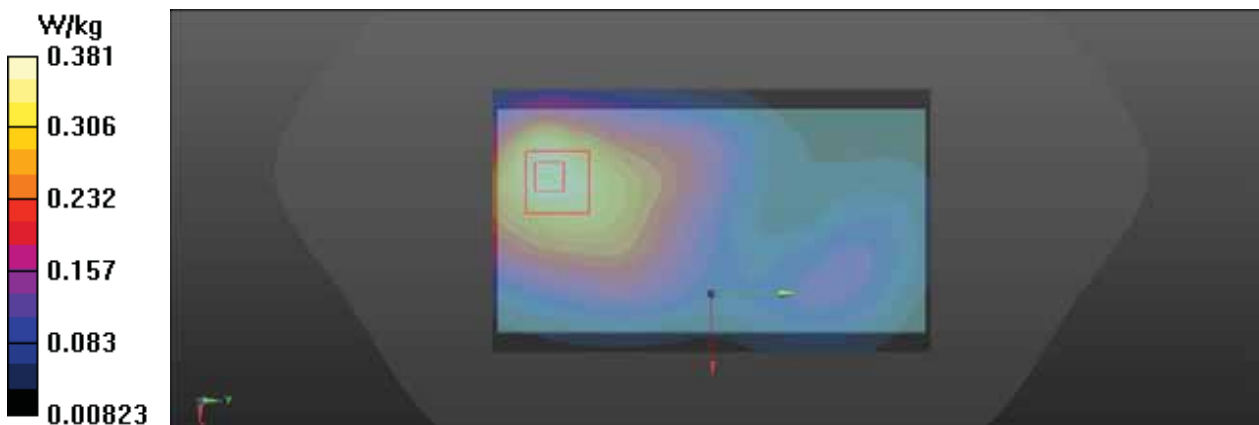

Test Laboratory: BACL SAR Testing Lab

264_LTE FDD Band 25_20M_QPSK_1RB_0Offset_Body Left_Ch 26365

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL 1900 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 38.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1882.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 26365/Area Scan (21x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0922 W/kg

Ch 26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.838 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.110 W/kg

SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.038 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 57.3%

Maximum value of SAR (measured) = 0.0922 W/kg

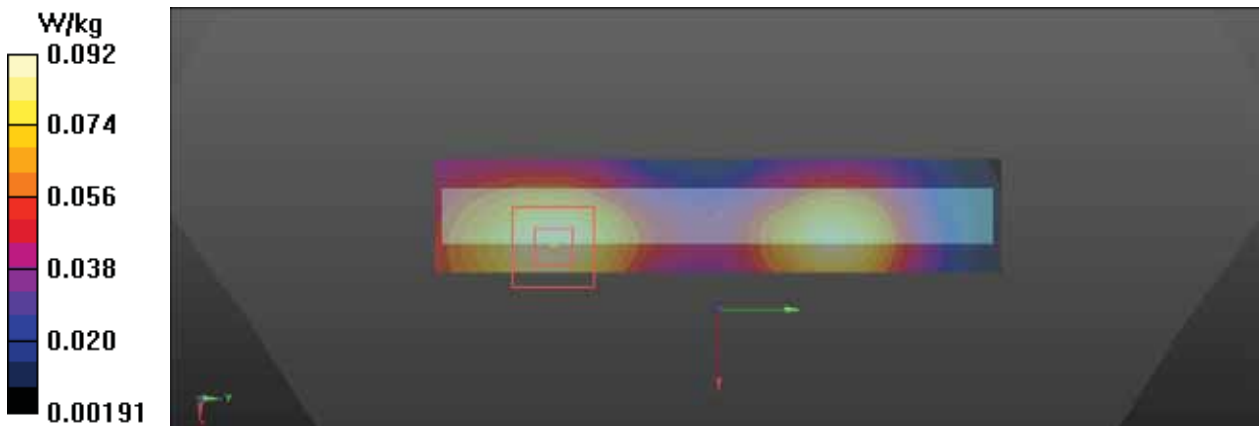

Test Laboratory:BACL.SAR TestingLab

265_LTE FDD Band 25_20M_QPSK_1RB_0Offset_Body Right_Ch 26365

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1

Medium: HSL 1900 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 38.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1882.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch 26365/Area Scan (21x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.300 W/kg

Ch 26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.76 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.348 W/kg

SAR(1 g) = 0.191 W/kg; SAR(10 g) = 0.107 W/kg

Smallest distance from peaks to all points 3 dB below = 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 54.1%

Maximum value of SAR (measured) = 0.280 W/kg

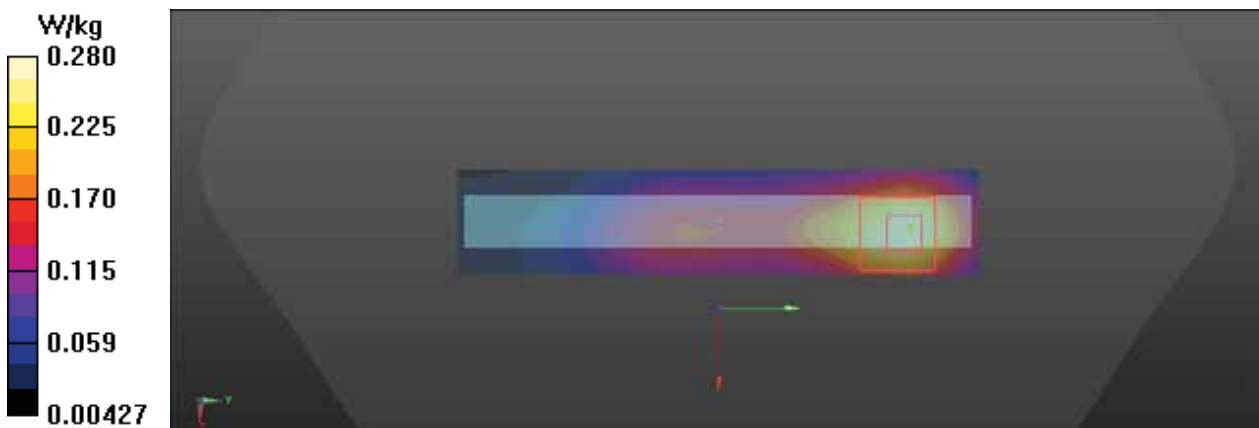

Test Laboratory: BACL SAR Testing Lab

266_LTE FDD Band 25_20M_QPSK_1RB_0Offset_Body Bottom_Ch 26365

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL 1900 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 38.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1882.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 26365/Area Scan (21x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.318 W/kg

Ch 26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.29 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.370 W/kg

SAR(1 g) = 0.208 W/kg; SAR(10 g) = 0.115 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 57.3%

Maximum value of SAR (measured) = 0.306 W/kg

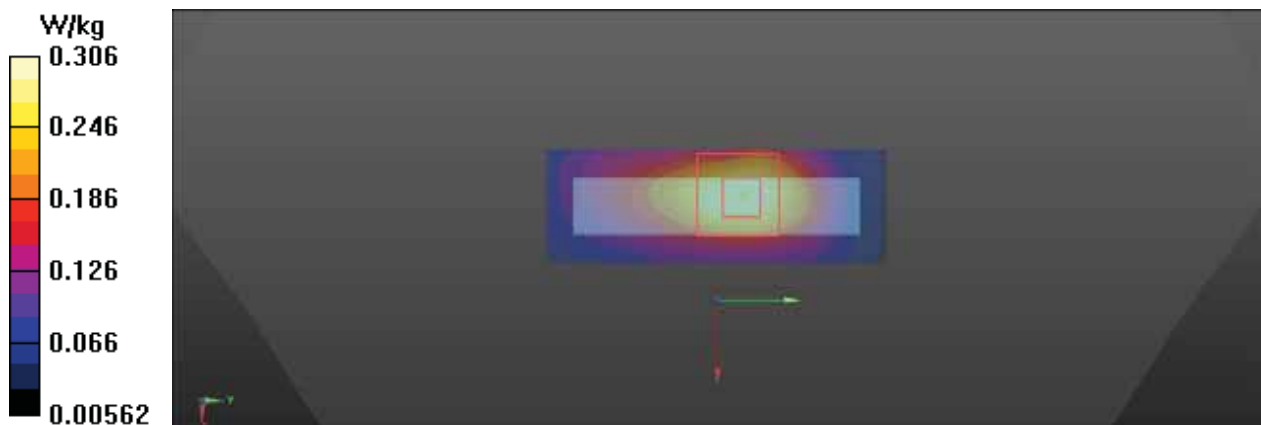

Test Laboratory: BACL SAR Testing Lab

267_LTE FDD Band 25_20M_QPSK_50%RB_0Offset_Body Front_Ch 26365

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL 1900 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 38.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1882.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 26365/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.384 W/kg

Ch 26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.86 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.425 W/kg

SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.153 W/kg

Smallest distance from peaks to all points 3 dB below = 18.7 mm

Ratio of SAR at M2 to SAR at M1 = 56.7%

Maximum value of SAR (measured) = 0.355 W/kg

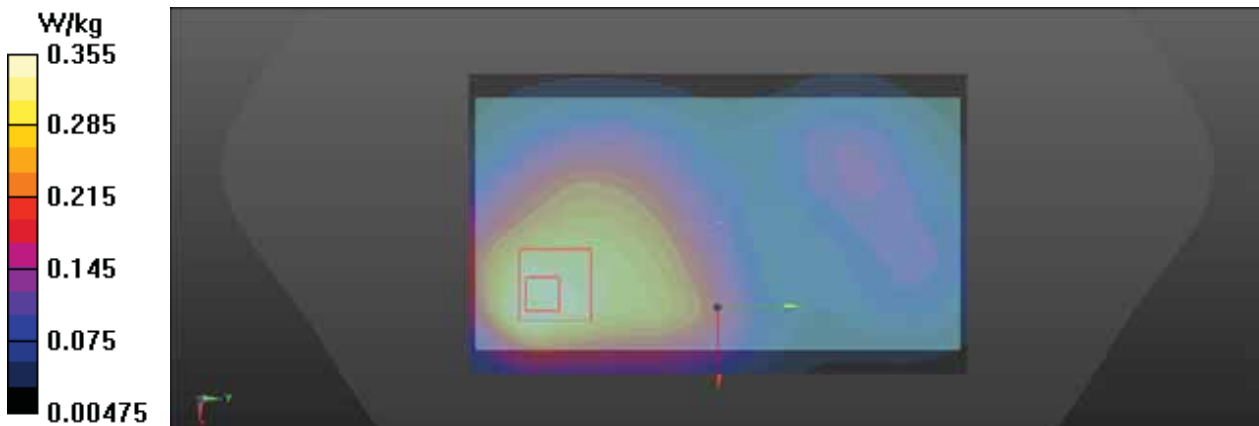

Test Laboratory: BACL SAR Testing Lab

268_LTE FDD Band 25_20M_QPSK_50%RB_0Offset_Body Back_Ch 26365

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1


Medium: HSL 1900 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 38.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1882.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 26365/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.341 W/kg

Ch 26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.48 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.394 W/kg
SAR(1 g) = 0.230 W/kg; SAR(10 g) = 0.141 W/kg
Smallest distance from peaks to all points 3 dB below = 19.5 mm
Ratio of SAR at M2 to SAR at M1 = 57.6%
Maximum value of SAR (measured) = 0.329 W/kg

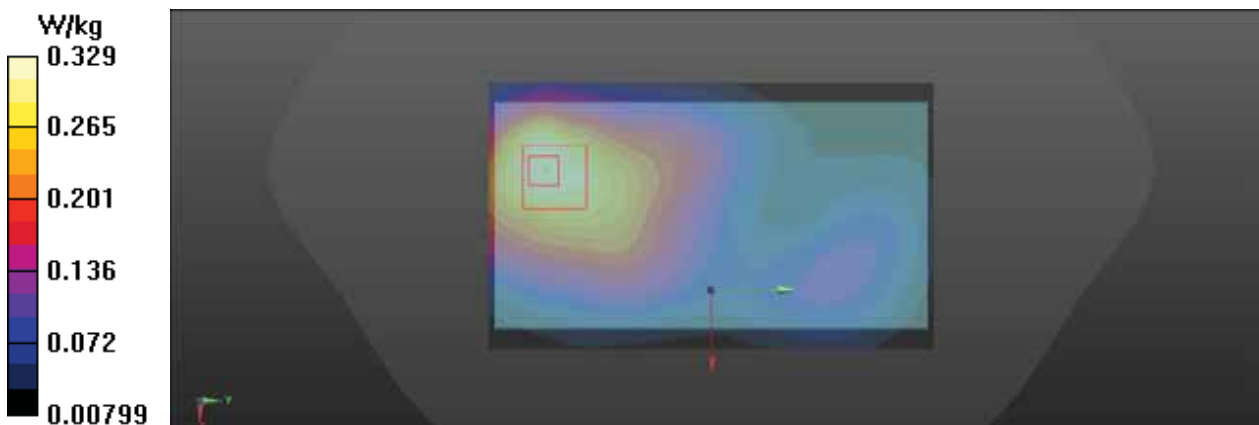

Test Laboratory: BACL SAR Testing Lab

269_LTE FDD Band 25_20M_QPSK_50%RB_0Offset_Body Left_Ch 26365

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL 1900 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 38.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1882.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 26365/Area Scan (21x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0819 W/kg

Ch 26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.384 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.100 W/kg

SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.034 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 57.1%

Maximum value of SAR (measured) = 0.0838 W/kg

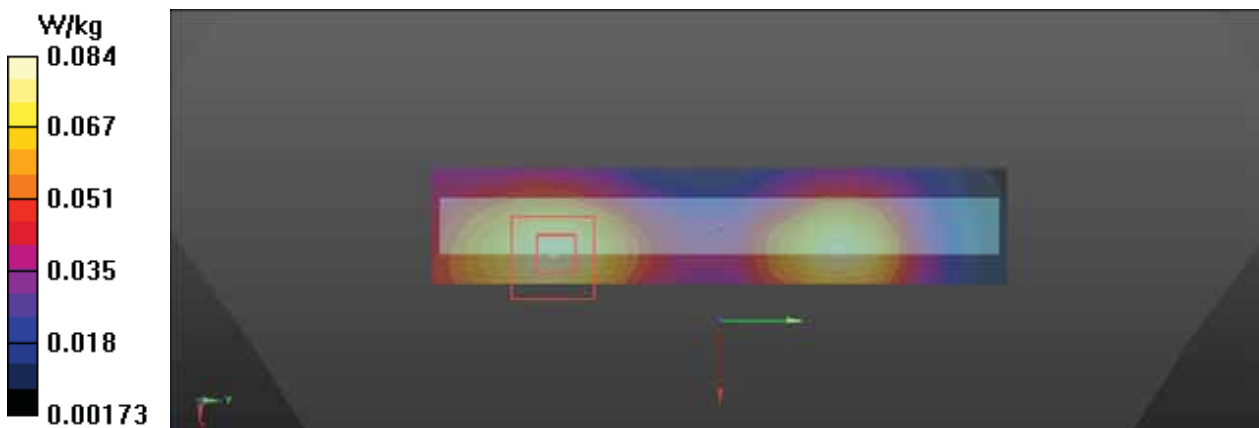

Test Laboratory: BACL SAR Testing Lab

270_LTE FDD Band 25_20M_QPSK_50%RB_0Offset_Body Right_Ch 26365

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 38.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1882.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 26365/Area Scan (21x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.259 W/kg

Ch 26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.74 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.301 W/kg
SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.092 W/kg
Smallest distance from peaks to all points 3 dB below = 14.4 mm
Ratio of SAR at M2 to SAR at M1 = 54.3%
Maximum value of SAR (measured) = 0.243 W/kg

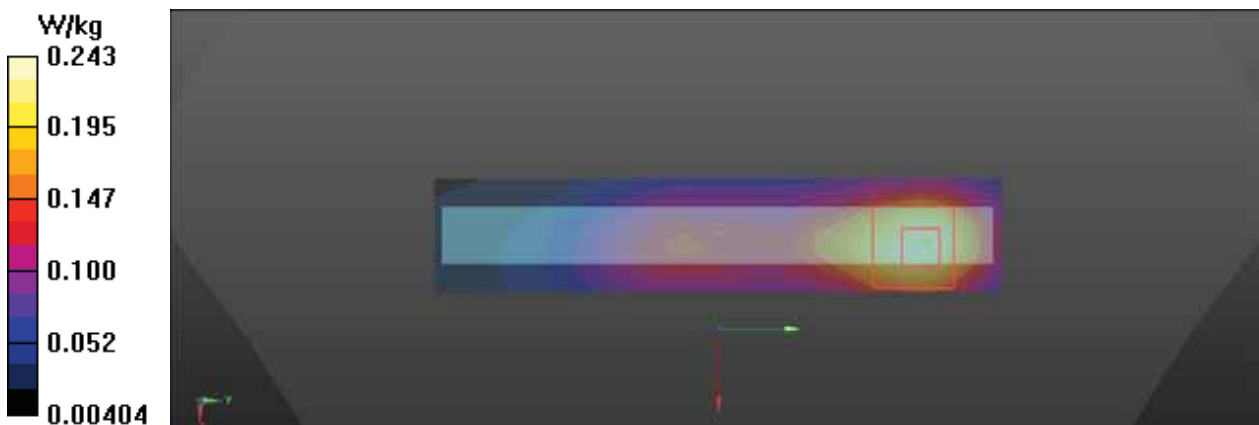

Test Laboratory: BACL SAR Testing Lab

271_LTE FDD Band 25_20M_QPSK_50%RB_0Offset_Body Bottom_Ch 26365

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1


Medium: HSL 1900 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 38.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1882.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 26365/Area Scan (21x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.274 W/kg

Ch 26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.34 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.322 W/kg
SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.099 W/kg
Smallest distance from peaks to all points 3 dB below = 12.8 mm
Ratio of SAR at M2 to SAR at M1 = 57%
Maximum value of SAR (measured) = 0.265 W/kg

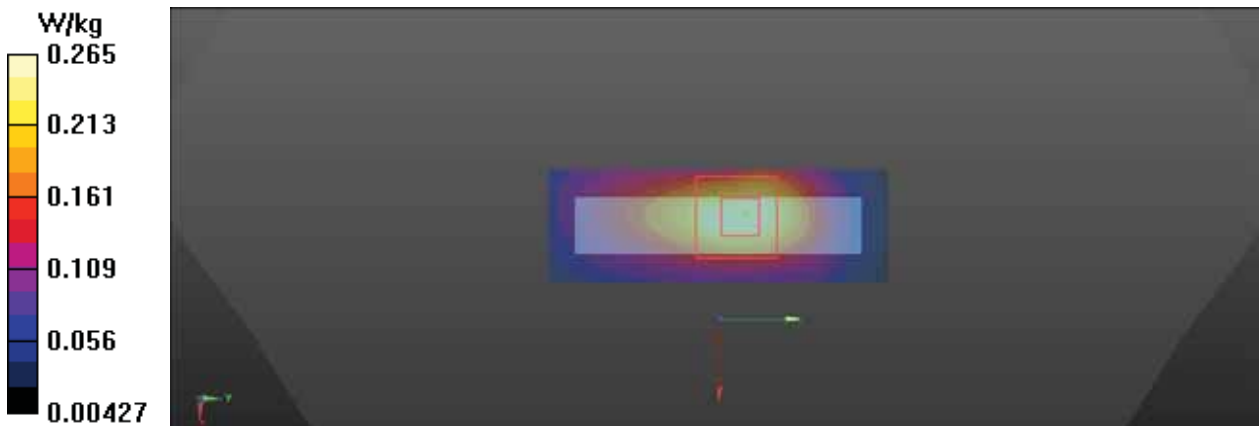

Test Laboratory: BACL SAR Testing Lab

273_LTE FDD Band 25_20M_QPSK_1RB_0Offset_Body Front_Ch 26365

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 38.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1882.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 26365/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.419 W/kg

Ch 26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.58 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.463 W/kg
SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.172 W/kg
Smallest distance from peaks to all points 3 dB below = 19.3 mm
Ratio of SAR at M2 to SAR at M1 = 58%
Maximum value of SAR (measured) = 0.389 W/kg

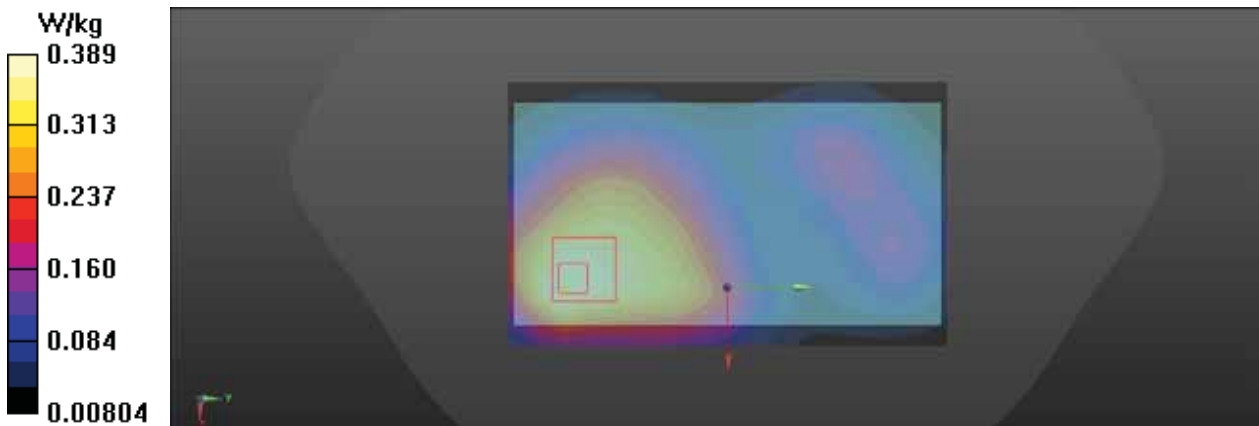

Test Laboratory: BACL SAR Testing Lab

272_LTE FDD Band 25_20M_QPSK_1RB_0Offset_Body Handheld Front_Ch 26365

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 38.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1882.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch 26365/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 2.96 W/kg

Ch 26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 29.59 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 3.22 W/kg
SAR(1 g) = 1.5 W/kg; SAR(10 g) = 0.784 W/kg
Smallest distance from peaks to all points 3 dB below = 9.1 mm
Ratio of SAR at M2 to SAR at M1 = 51.8%
Maximum value of SAR (measured) = 2.29 W/kg

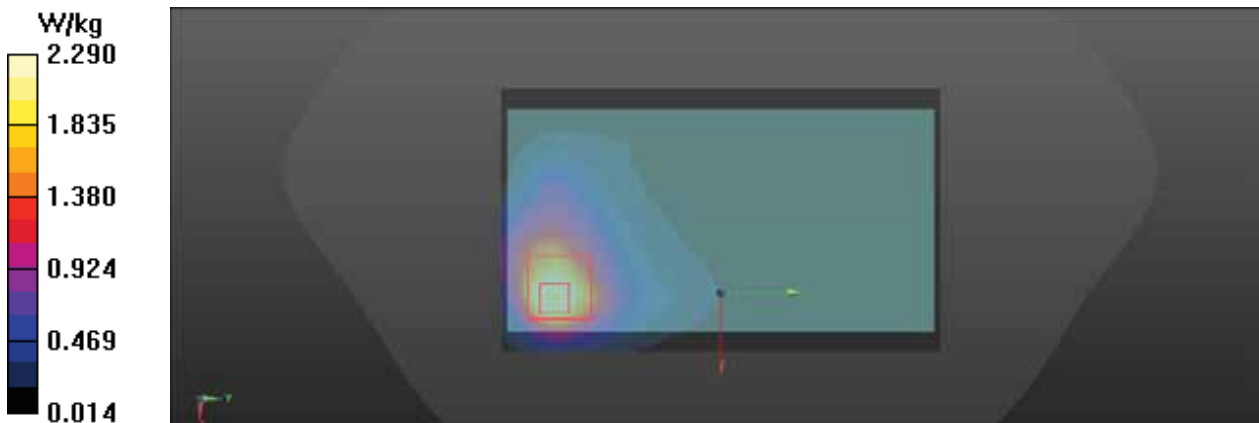

Test Laboratory: BACL SAR Testing Lab

39_LTE FDD Band 26_15M_QPSK_1RB_0Offset_Head Left Cheek_Ch 26860

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: HSL835 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.096$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 831.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26860/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.199 W/kg

Ch26860/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.79 V/m; Power Drift = 0.08 dB



Peak SAR (extrapolated) = 0.221 W/kg

SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.137 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 79.7%

Maximum value of SAR (measured) = 0.203 W/kg

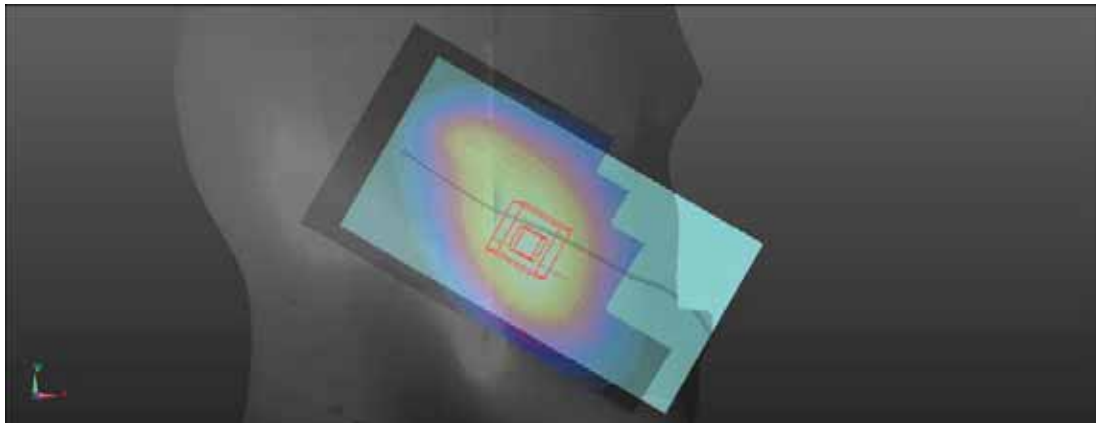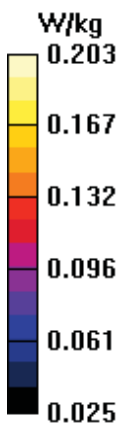

Test Laboratory: BACL SAR Testing Lab

40_LTE FDD Band 26_15M_QPSK_1RB_0Offset_Head Left Tilt_Ch 26860

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.096$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 831.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26860/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.121 W/kg

Ch26860/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.49 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.137 W/kg

SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.079 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 75.6%

Maximum value of SAR (measured) = 0.127 W/kg

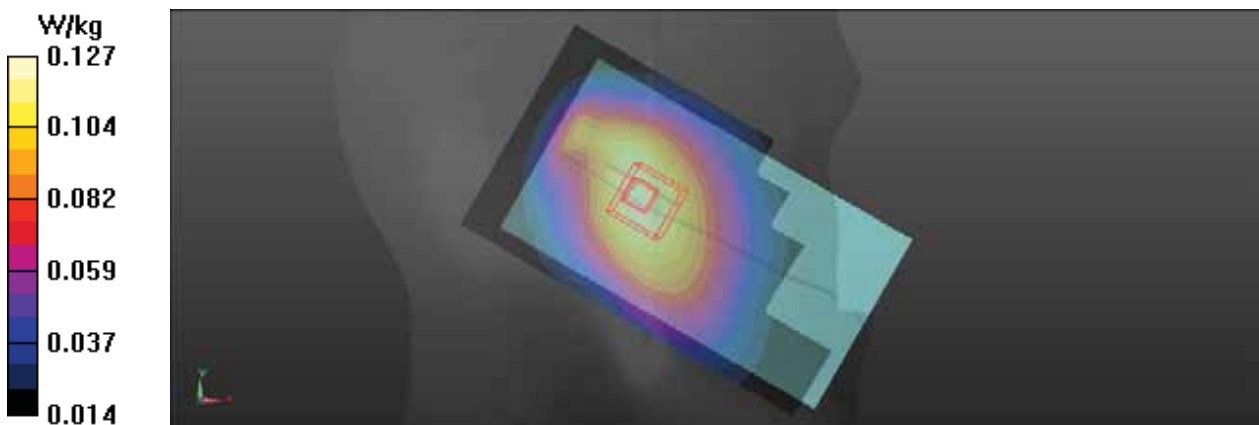

Test Laboratory: BACL SAR Testing Lab

41_LTE FDD Band 26_15M_QPSK_1RB_0Offset_Right Check_Ch 26860

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.096$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 831.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26860/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.189 W/kg

Ch26860/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.12 V/m; Power Drift = 0.10 dB



Peak SAR (extrapolated) = 0.199 W/kg

SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.130 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 80.6%

Maximum value of SAR (measured) = 0.187 W/kg

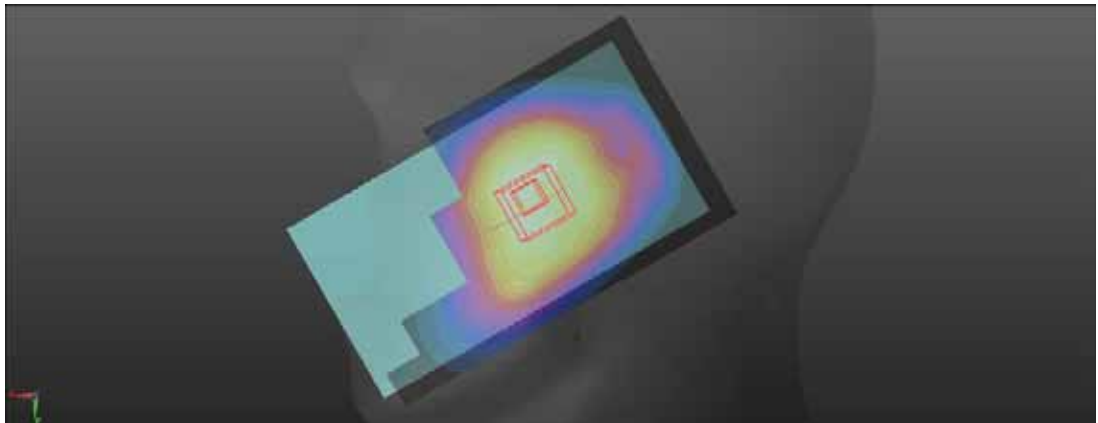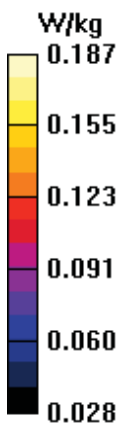

Test Laboratory: BACL SAR Testing Lab

42_LTE FDD Band 26_15M_QPSK_1RB_0Offset_Head Right Tilt_Ch 26860

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: HSL835 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.096$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 831.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26860/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.130 W/kg

Ch26860/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.55 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 0.140 W/kg

SAR(1 g) = 0.108 W/kg; SAR(10 g) = 0.081 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 77%

Maximum value of SAR (measured) = 0.129 W/kg

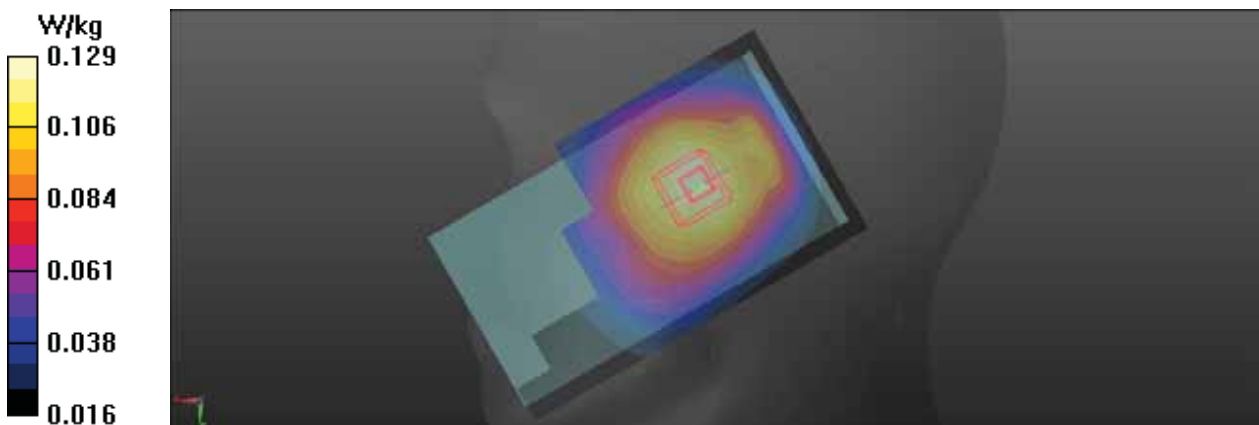

Test Laboratory: BACL SAR Testing Lab

43_LTE FDD Band 26_15M_QPSK_50%RB_0Offset_Head Left Cheek_Ch 26860

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.096$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 831.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26860/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.159 W/kg

Ch26860/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.98 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.175 W/kg

SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.107 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 79.4%

Maximum value of SAR (measured) = 0.161 W/kg

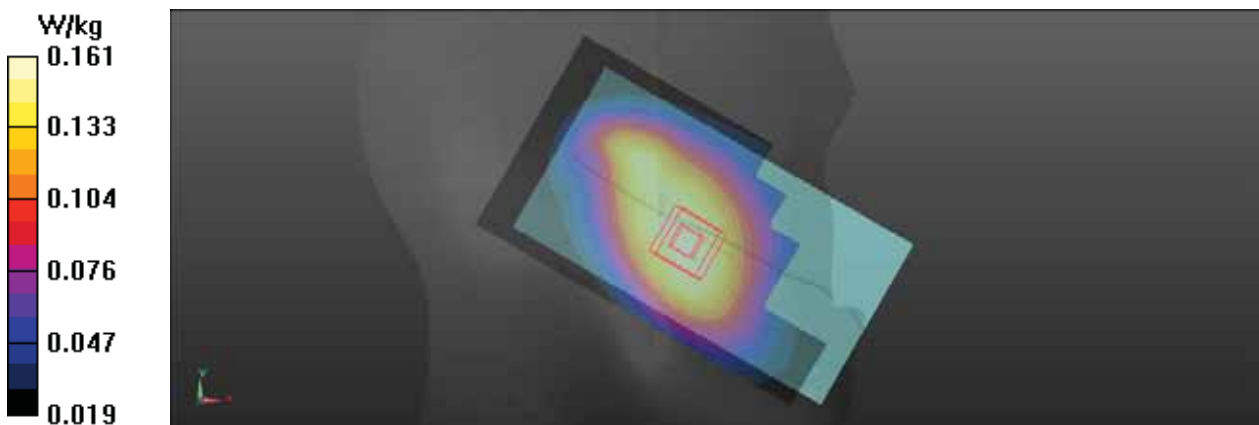

Test Laboratory: BACL SAR Testing Lab

44_LTE FDD Band 26_15M_QPSK_50%RB_0Offset_Head Left Tilt_Ch 26860

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: HSL835 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.096$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 831.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26860/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.101 W/kg

Ch26860/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.46 V/m; Power Drift = -0.03 dB



Peak SAR (extrapolated) = 0.112 W/kg

SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.064 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 77.1%

Maximum value of SAR (measured) = 0.103 W/kg

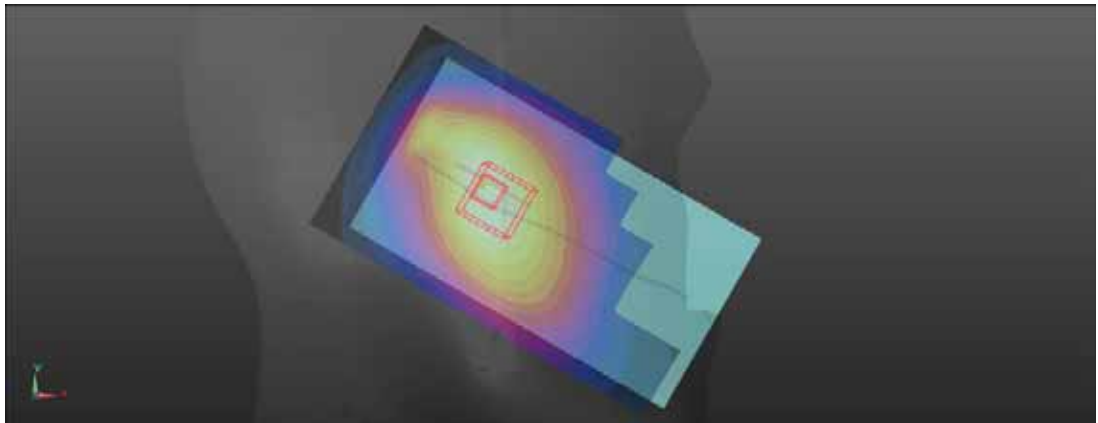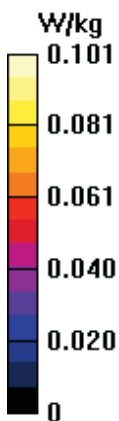

Test Laboratory: BACL SAR Testing Lab

45_LTE FDD Band 26_15M_QPSK_50%RB_0Offset_Head Right Cheek_Ch 26860

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.096$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 831.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26860/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.159 W/kg

Ch26860/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.35 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.167 W/kg

SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.109 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 80.6%

Maximum value of SAR (measured) = 0.157 W/kg

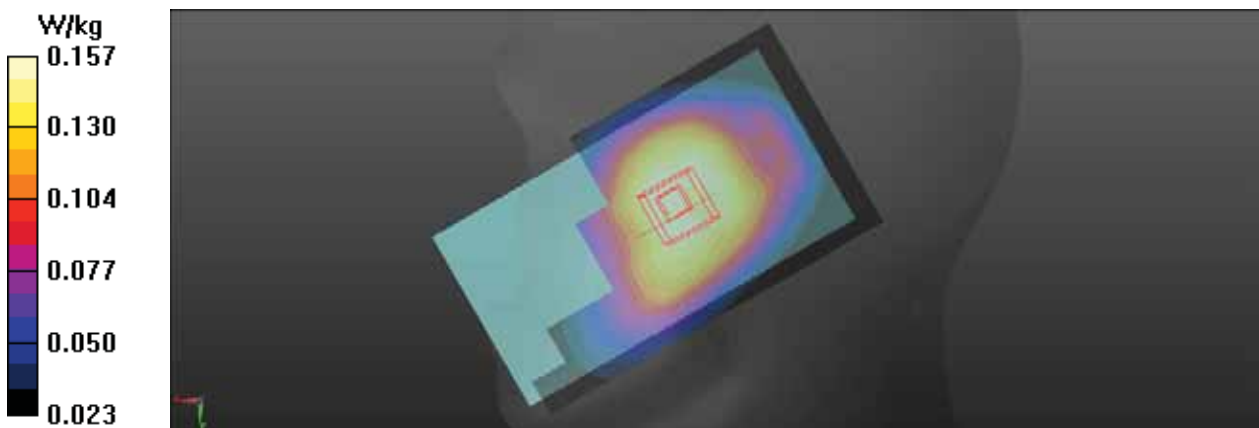

Test Laboratory: BACL SAR Testing Lab

46_LTE FDD Band 26_15M_QPSK_50%RB_0Offset_Head Right Tilt_Ch 26860

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: HSL835 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.096$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 831.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26860/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.106 W/kg

Ch26860/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.37 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 0.114 W/kg

SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.066 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 76.3%

Maximum value of SAR (measured) = 0.105 W/kg

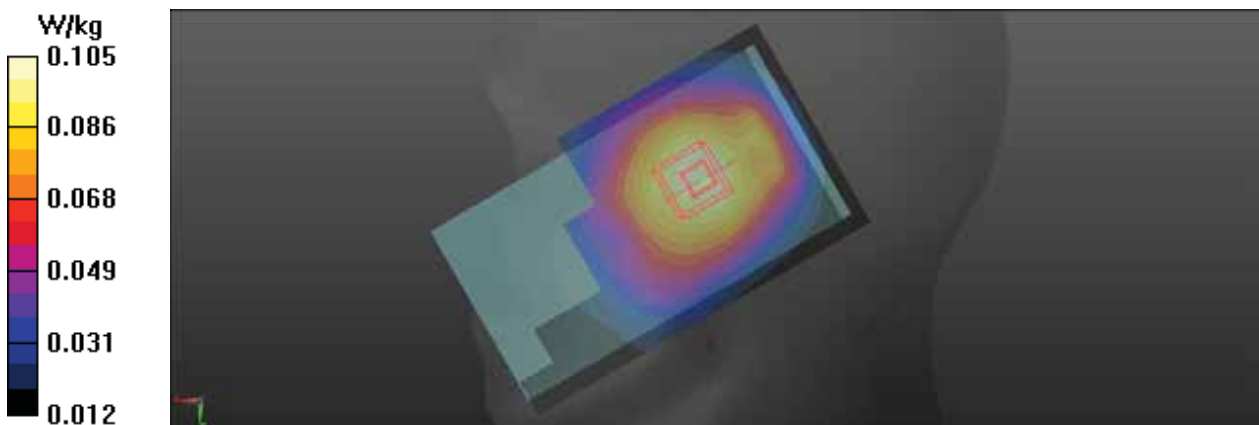

Test Laboratory: BACL SAR Testing Lab

47_LTE FDD Band 26_15M_QPSK_1RB_0Offset_Head Left Cheek_Ch 26860

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: HSL835 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.096$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 831.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26860/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.199 W/kg

Ch26860/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.74 V/m; Power Drift = 0.01 dB



Peak SAR (extrapolated) = 0.217 W/kg

SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.132 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 78.3%

Maximum value of SAR (measured) = 0.199 W/kg

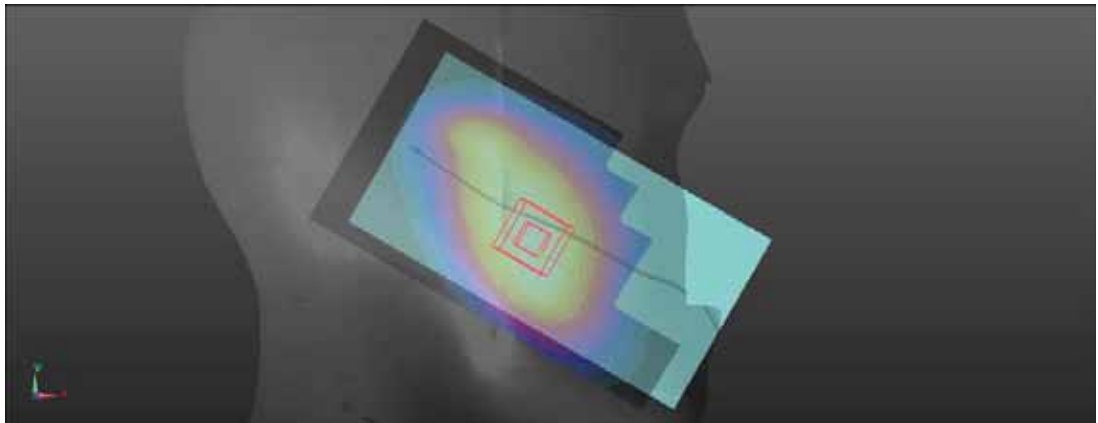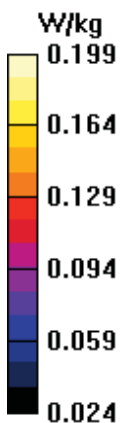

Test Laboratory: BACL SAR Testing Lab

202_LTE FDD Band 26_15M_QPSK_1RB_0Offset_Body Front_Ch 26860

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.096$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 831.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26860/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.258 W/kg

Ch26860/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.12 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.287 W/kg

SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.158 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 72.8%

Maximum value of SAR (measured) = 0.260 W/kg

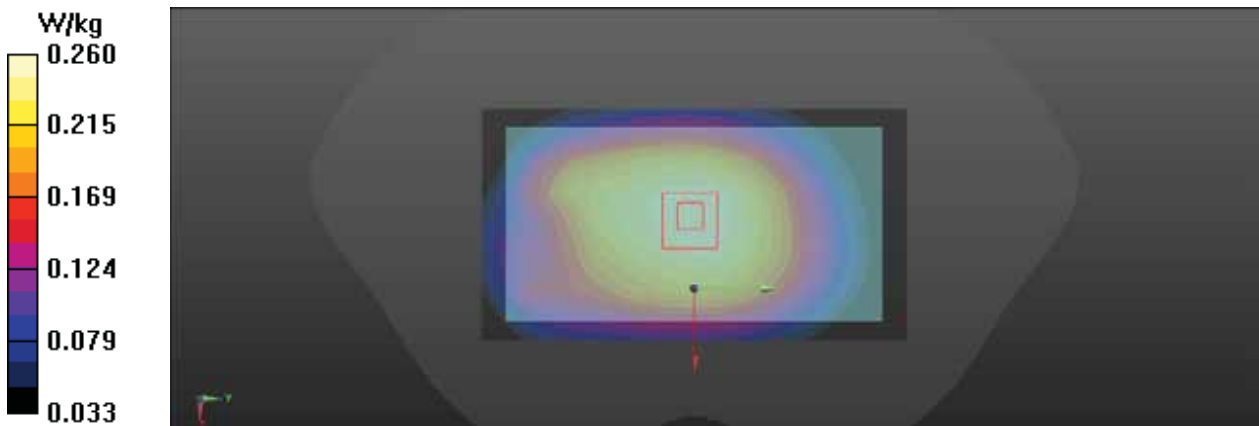

Test Laboratory: BACL SAR Testing Lab

203_LTE FDD Band 26_15M_QPSK_1RB_0Offset_Body Back_Ch 26860

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.096$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 831.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26860/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.256 W/kg

Ch26860/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.20 V/m; Power Drift = -0.04 dB



Peak SAR (extrapolated) = 0.286 W/kg

SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.156 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 73%

Maximum value of SAR (measured) = 0.259 W/kg

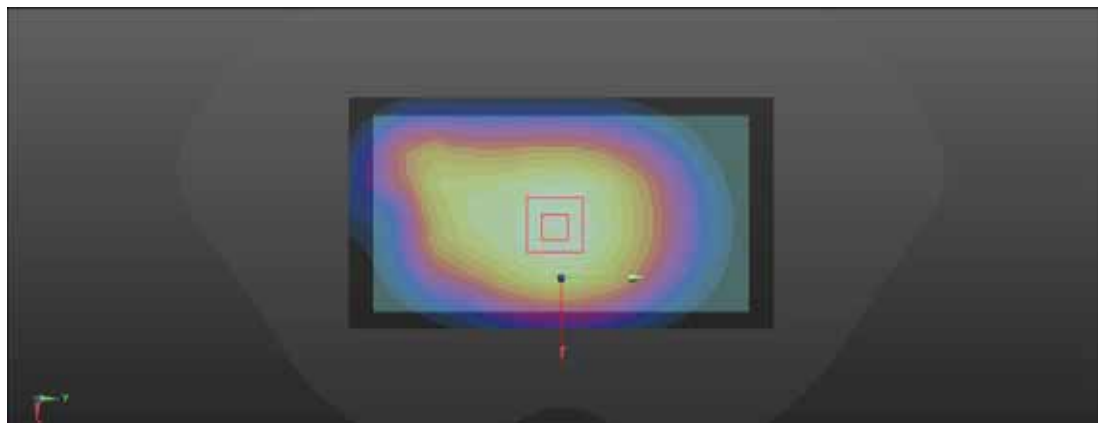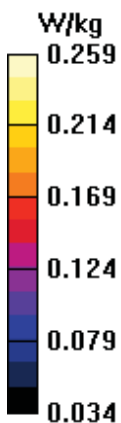

Test Laboratory: BACL SAR Testing Lab

204_LTE FDD Band 26_15M_QPSK_1RB_0Offset_Body Left_Ch 26860

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.096$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 831.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26860/Area Scan (21x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.224 W/kg

Ch26860/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.16 V/m; Power Drift = -0.09 dB



Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.115 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 66.3%

Maximum value of SAR (measured) = 0.223 W/kg

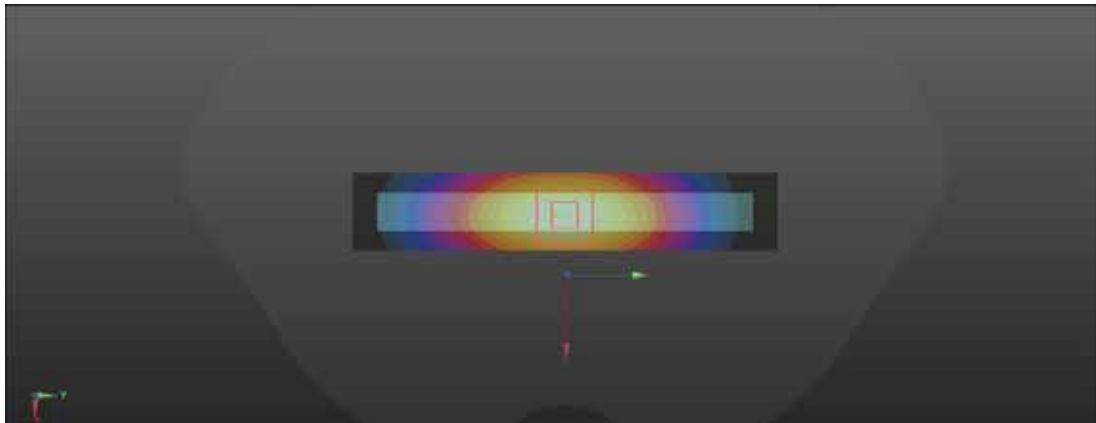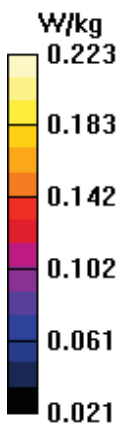

Test Laboratory: BACL SAR Testing Lab

205_LTE FDD Band 26_15M_QPSK_1RB_0Offset_Body Right_Ch 26860

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.096$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 831.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26860/Area Scan (21x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.150 W/kg

Ch26860/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.87 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.078 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 66.7%

Maximum value of SAR (measured) = 0.150 W/kg

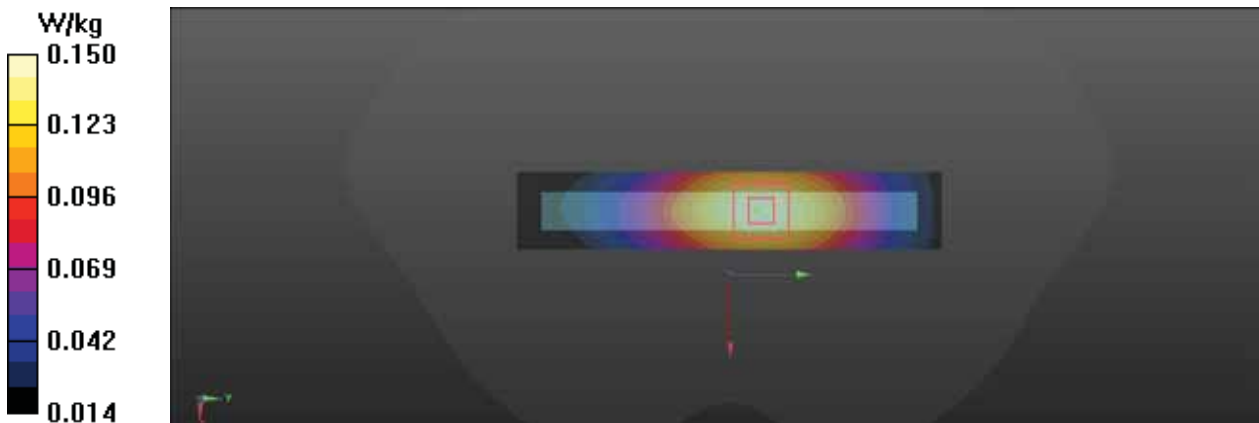

Test Laboratory: BACL SAR Testing Lab

206_LTE FDD Band 26_15M_QPSK_1RB_0Offset_Body Bottom_Ch 26860

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.096$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 831.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26860/Area Scan (21x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0933 W/kg

Ch26860/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.172 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.119 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.028 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 45.2%

Maximum value of SAR (measured) = 0.0886 W/kg



Test Laboratory: BACL SAR Testing Lab

207_LTE FDD Band 26_15M_QPSK_50%RB_0Offset_Body Front_Ch 26860

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.096$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 831.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26860/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.214 W/kg

Ch26860/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.47 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.237 W/kg

SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.130 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 71.6%

Maximum value of SAR (measured) = 0.212 W/kg

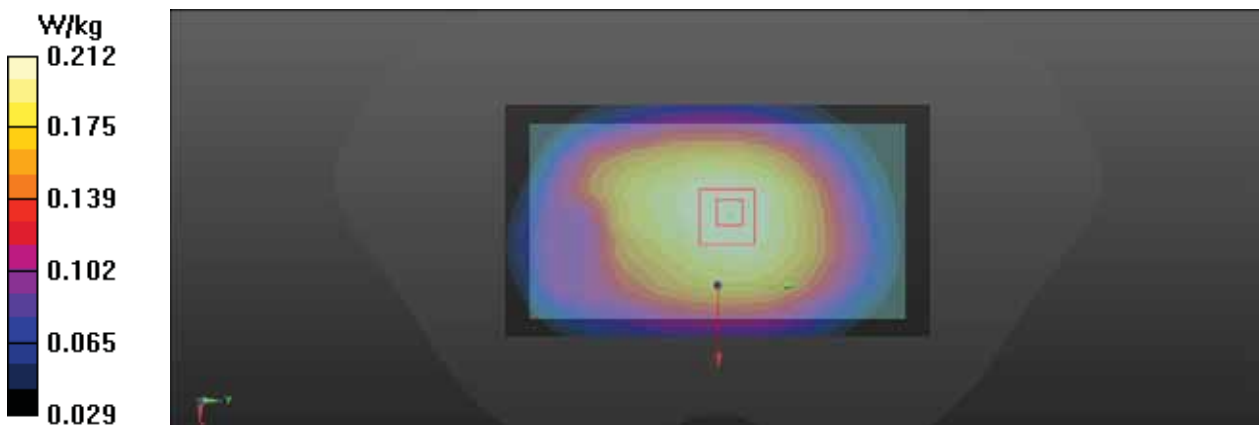

Test Laboratory: BACL SAR Testing Lab

208_LTE FDD Band 26_15M_QPSK_50%RB_0Offset_Body Back_Ch 26860

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.096$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 831.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26860/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.225 W/kg

Ch26860/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.15 V/m; Power Drift = -0.08 dB



Peak SAR (extrapolated) = 0.250 W/kg

SAR(1 g) = 0.184 W/kg; SAR(10 g) = 0.137 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 73%

Maximum value of SAR (measured) = 0.225 W/kg

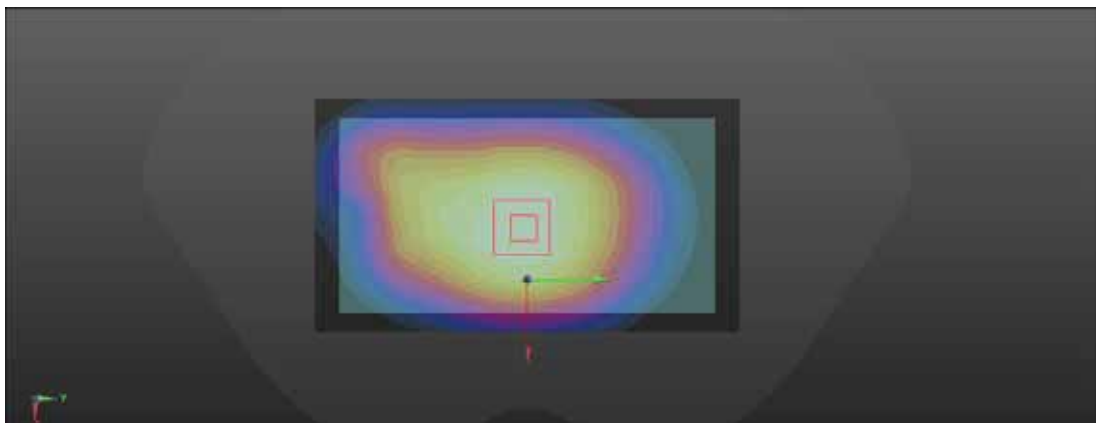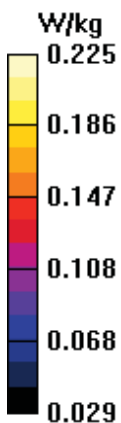

Test Laboratory: BACL SAR Testing Lab

209_LTE FDD Band 26_15M_QPSK_50%RB_0Offset_Body Left_Ch 26860

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: HSL835 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.096$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 831.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26860/Area Scan (21x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.174 W/kg

Ch26860/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.57 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 0.201 W/kg

SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.092 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 66.5%

Maximum value of SAR (measured) = 0.176 W/kg

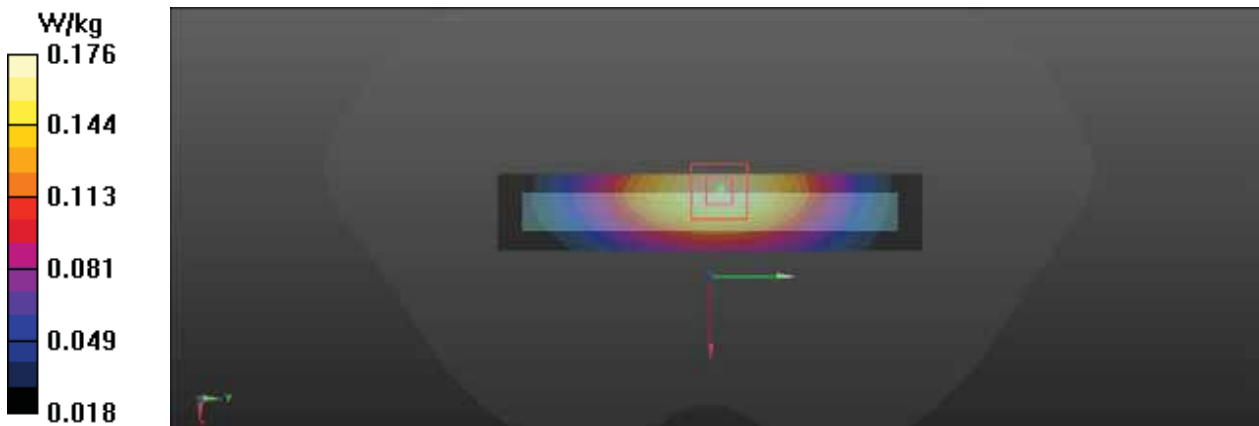

Test Laboratory: BACL SAR Testing Lab

210_LTE FDD Band 26_15M_QPSK_50%RB_0Offset_Body Right_Ch 26860

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: HSL835 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.096$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 831.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26860/Area Scan (21x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.127 W/kg

Ch26860/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.74 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = 0.096 W/kg; SAR(10 g) = 0.066 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 67.2%

Maximum value of SAR (measured) = 0.125 W/kg

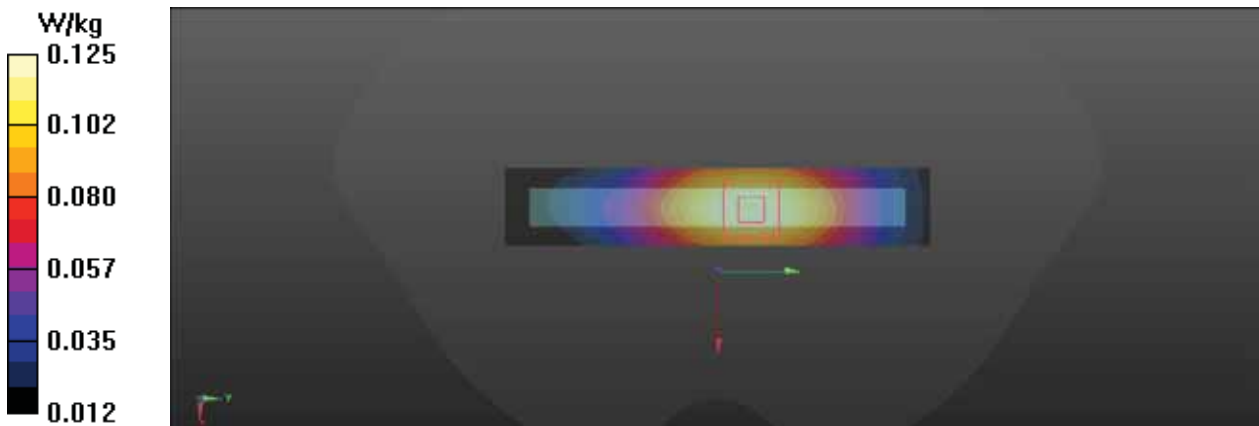

Test Laboratory: BACL SAR Testing Lab

211_LTE FDD Band 26_15M_QPSK_50%RB_0Offset_Body Bottom_Ch 26860

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: HSL835 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.096$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 831.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26860/Area Scan (21x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0826 W/kg

Ch26860/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.578 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.104 W/kg
SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.024 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 45.4%
Maximum value of SAR (measured) = 0.0787 W/kg

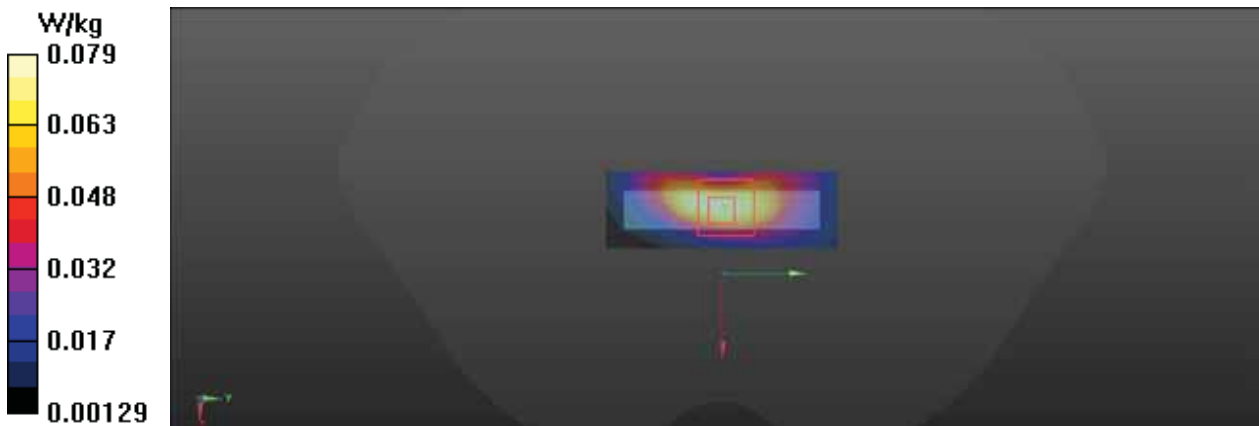

Test Laboratory: BACL SAR Testing Lab

213_LTE FDD Band 26_15M_QPSK_1RB_0Offset_Body Back_Ch 26860

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.096$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 831.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26860/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.247 W/kg

Ch26860/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.66 V/m; Power Drift = -0.02 dB



Peak SAR (extrapolated) = 0.274 W/kg

SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.147 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 72.1%

Maximum value of SAR (measured) = 0.248 W/kg

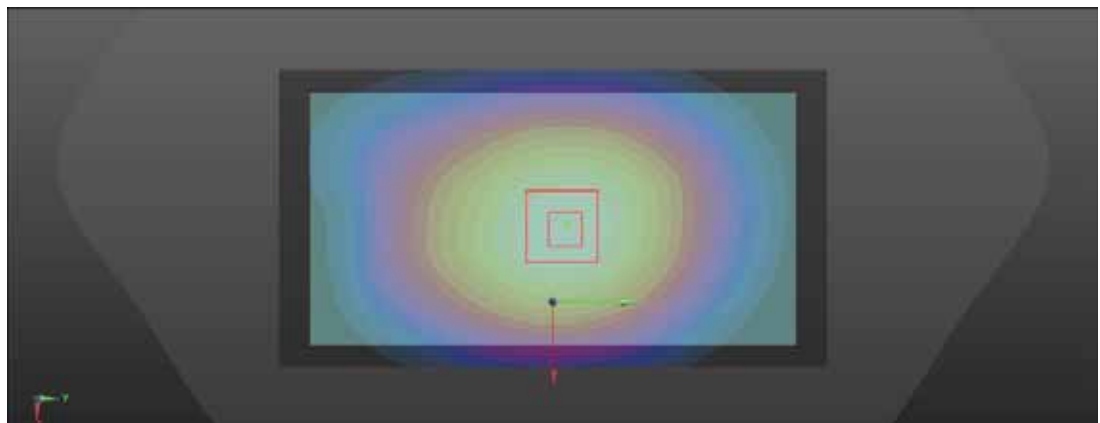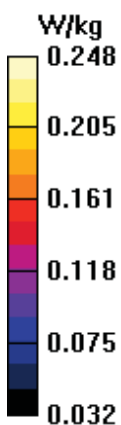

Test Laboratory: BACL SAR Testing Lab

212_LTE FDD Band 26_15M_QPSK_1RB_0Offset_Body Handheld Back_Ch 26860

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.096$; $\rho = 1000$ kg/m³


DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 831.5 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26860/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.11 W/kg

Ch26860/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 35.62 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 1.24 W/kg
SAR(1 g) = 0.713 W/kg; SAR(10 g) = 0.447 W/kg
Smallest distance from peaks to all points 3 dB below = 24 mm
Ratio of SAR at M2 to SAR at M1 = 59.8%
Maximum value of SAR (measured) = 1.07 W/kg

Ch26860/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 35.62 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 1.43 W/kg
SAR(1 g) = 0.764 W/kg; SAR(10 g) = 0.459 W/kg
Smallest distance from peaks to all points 3 dB below = 14.3 mm
Ratio of SAR at M2 to SAR at M1 = 53.2%
Maximum value of SAR (measured) = 1.17 W/kg

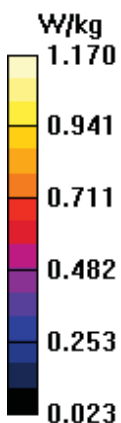

Test Laboratory: BACL SAR Testing Lab

75_LTE FDD Band 66_20M_QPSK_1RB_0Offset_Head Left Check_Ch 132322

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch132322/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.153 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.08 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.170 W/kg
SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.078 W/kg
Smallest distance from peaks to all points 3 dB below = 24.1 mm
Ratio of SAR at M2 to SAR at M1 = 67.6%
Maximum value of SAR (measured) = 0.151 W/kg

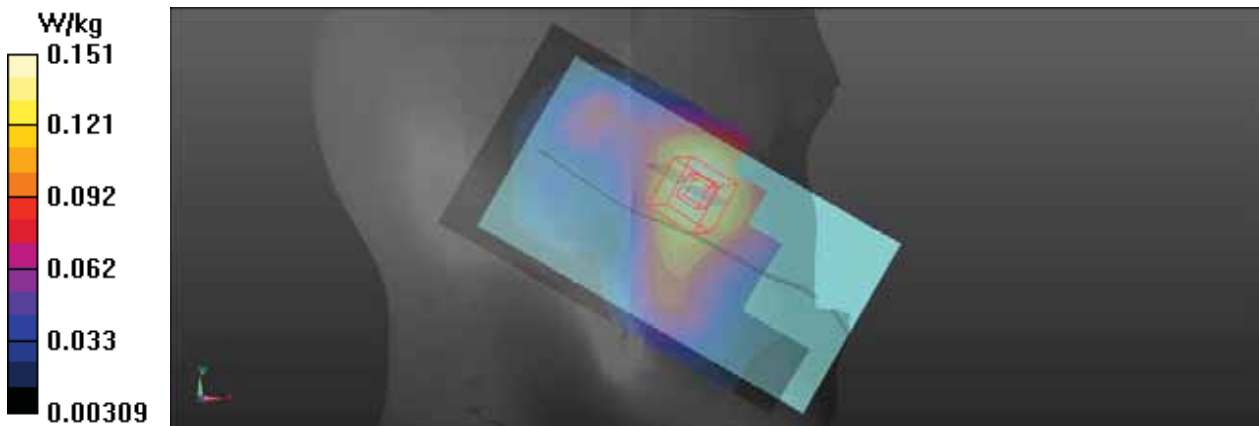

Test Laboratory: BACL SAR Testing Lab

76_LTE FDD Band 66_20M_QPSK_1RB_0Offset_Head Left Tilt_Ch 132322

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch132322/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.110 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.511 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.137 W/kg
SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.046 W/kg
Smallest distance from peaks to all points 3 dB below = 11.3 mm
Ratio of SAR at M2 to SAR at M1 = 62.8%
Maximum value of SAR (measured) = 0.111 W/kg

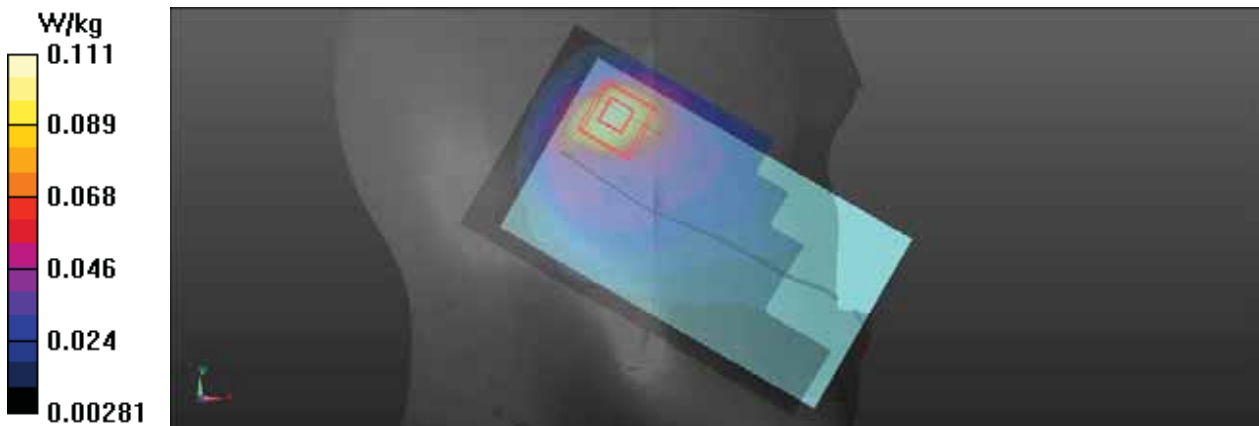

Test Laboratory: BACL SAR Testing Lab

77_LTE FDD Band 66_20M_QPSK_1RB_0Offset_Head Right Check_Ch 132322

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch132322/Area Scan (61x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.392 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.08 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.428 W/kg

SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.170 W/kg

Smallest distance from peaks to all points 3 dB below = 14.5 mm

Ratio of SAR at M2 to SAR at M1 = 64.1%

Maximum value of SAR (measured) = 0.375 W/kg

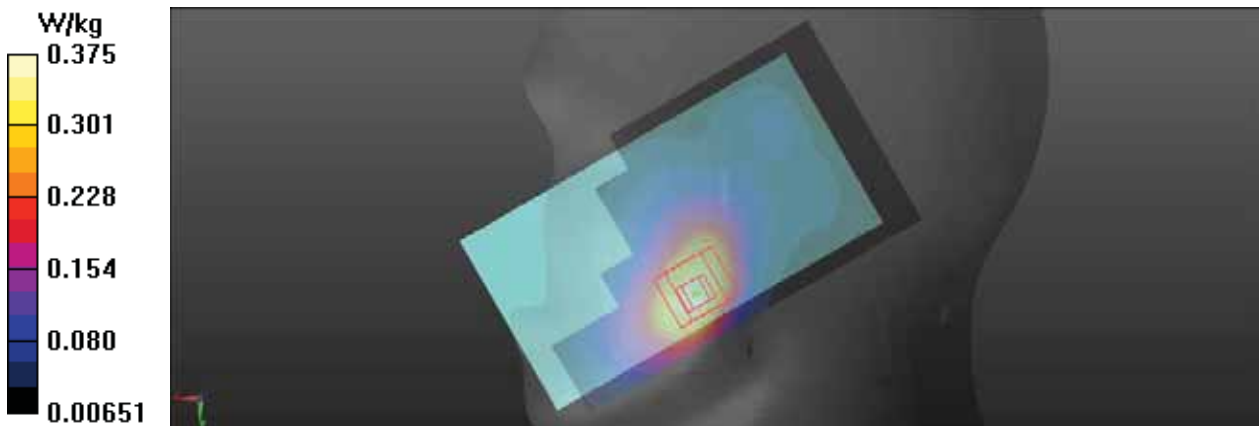

Test Laboratory:BACL.SAR TestingLab

78_LTE FDD Band 66_20M_QPSK_1RB_0Offset_Head Right Tilt_Ch 132322

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch132322/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.109 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.655 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.121 W/kg
SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.047 W/kg
Smallest distance from peaks to all points 3 dB below = 14.7 mm
Ratio of SAR at M2 to SAR at M1 = 64.1%
Maximum value of SAR (measured) = 0.105 W/kg

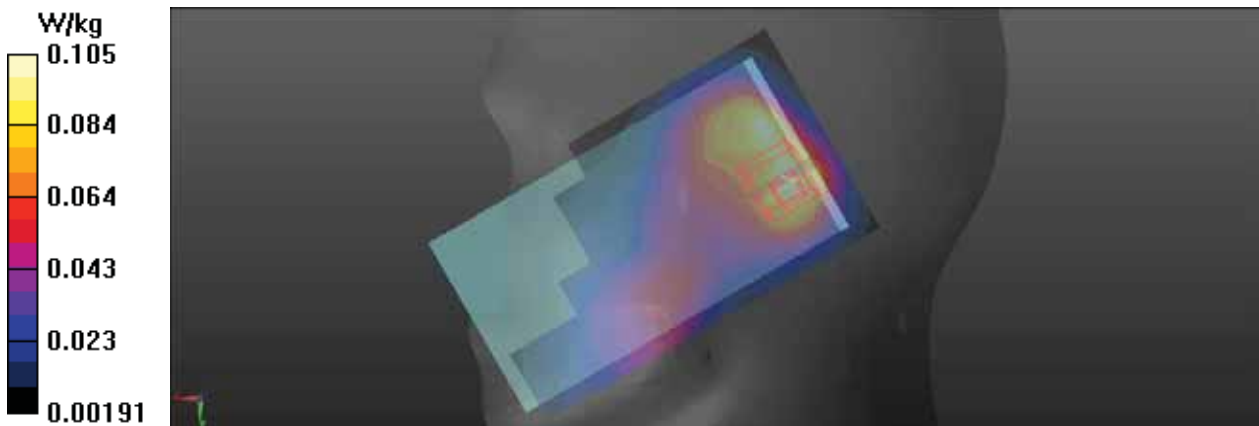

Test Laboratory: BACL SAR Testing Lab

79_LTE FDD Band 66_20M_QPSK_50%RB_0Offset_Head Left Check_Ch 132322

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch132322/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.126 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.131 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 0.137 W/kg
SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.064 W/kg
Smallest distance from peaks to all points 3 dB below = 25.3 mm
Ratio of SAR at M2 to SAR at M1 = 69.3%
Maximum value of SAR (measured) = 0.122 W/kg

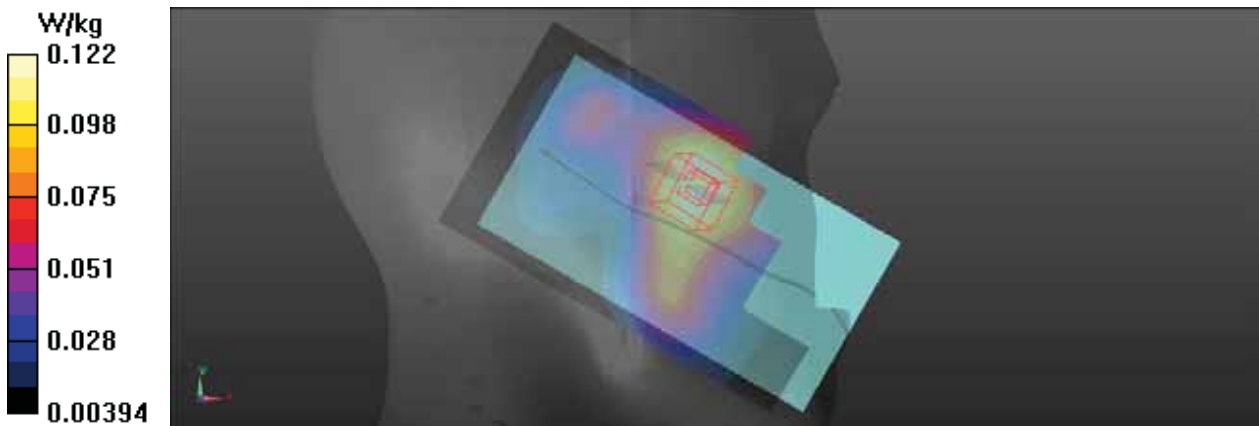

Test Laboratory: BACL SAR Testing Lab

80_LTE FDD Band 66_20M_QPSK_50%RB_0Offset_Head Left Tilt_Ch 132322

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch132322/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0907 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.809 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.112 W/kg

SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.039 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 63%

Maximum value of SAR (measured) = 0.0945 W/kg

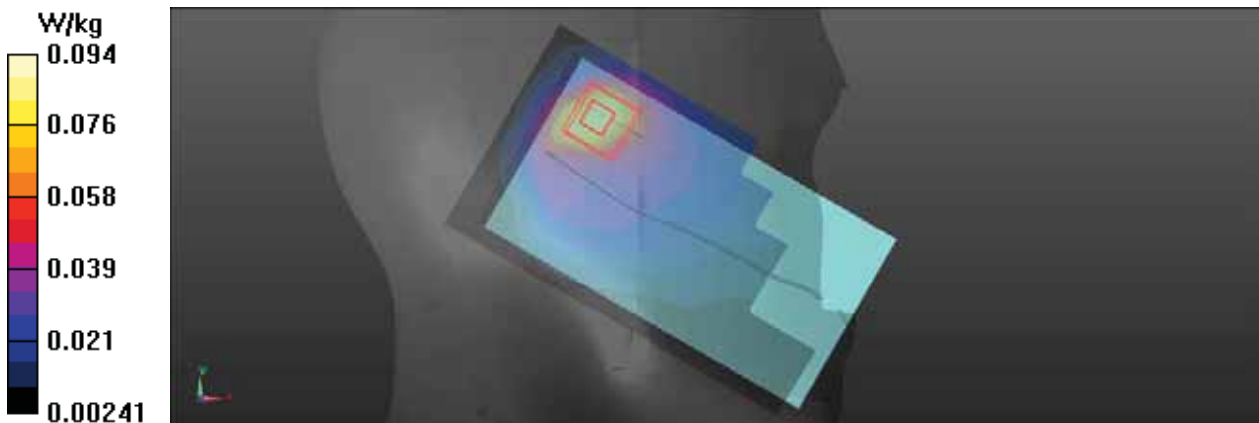

Test Laboratory: BACL SAR Testing Lab

81_LTE FDD Band 66_20M_QPSK_50%RB_0Offset_Head Right Check_Ch 132322

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch132322/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.330 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.81 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.362 W/kg
SAR(1 g) = 0.229 W/kg; SAR(10 g) = 0.143 W/kg
Smallest distance from peaks to all points 3 dB below = 14.5 mm
Ratio of SAR at M2 to SAR at M1 = 63.9%
Maximum value of SAR (measured) = 0.317 W/kg

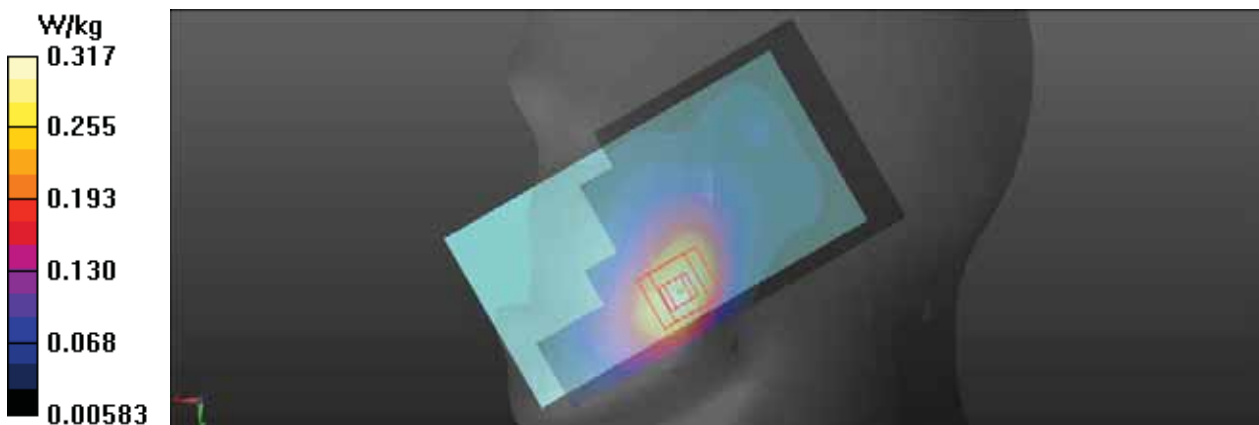

Test Laboratory: BACL SAR Testing Lab

82_LTE FDD Band 66_20M_QPSK_50%RB_0Offset_Head Right Tilt_Ch 132322

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch132322/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0938 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.986 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.104 W/kg
SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.041 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 62.9%
Maximum value of SAR (measured) = 0.0904 W/kg

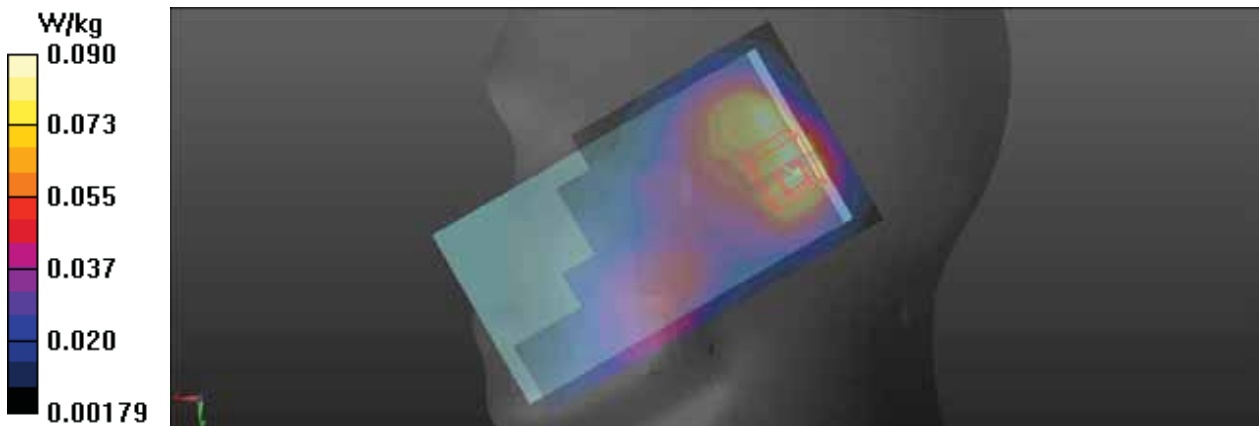

Test Laboratory: BACL SAR Testing Lab

83_LTE FDD Band 66_20M_QPSK_1RB_0Offset_Head Right Check_Ch 132322

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch132322/Area Scan (61x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.368 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 15.20 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.408 W/kg
SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.161 W/kg
Smallest distance from peaks to all points 3 dB below = 14.8 mm
Ratio of SAR at M2 to SAR at M1 = 62.4%
Maximum value of SAR (measured) = 0.354 W/kg

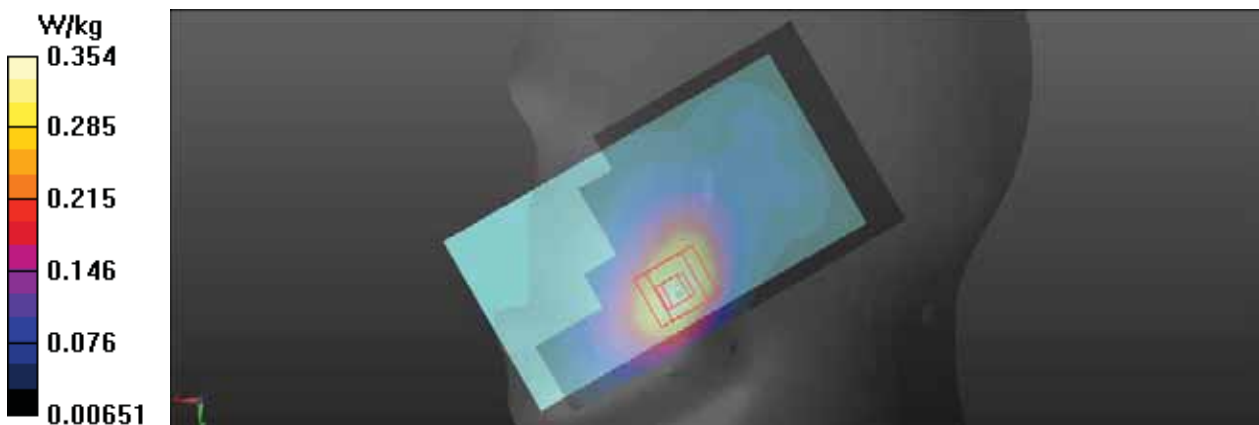

Test Laboratory: BACL SAR Testing Lab

250_LTE FDD Band 66_20M_QPSK_1RB_0Offset_Body Front_Ch 132322

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch132322/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.388 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.09 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.438 W/kg

SAR(1 g) = 0.263 W/kg; SAR(10 g) = 0.162 W/kg

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 60.7%

Maximum value of SAR (measured) = 0.367 W/kg

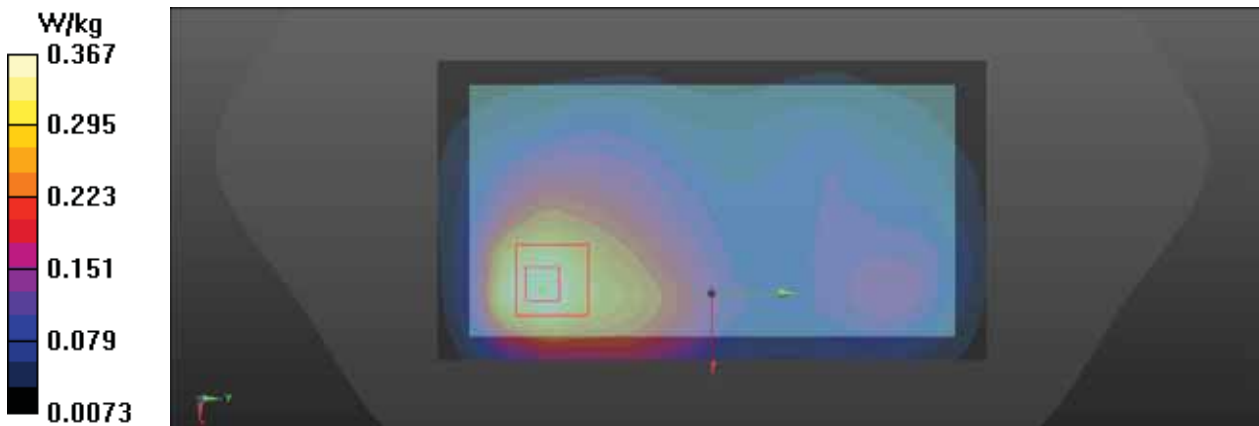

Test Laboratory: BACL SAR Testing Lab

251_LTE FDD Band 66_20M_QPSK_1RB_0Offset_Body Back_Ch 132322

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch132322/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.513 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.88 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.580 W/kg

SAR(1 g) = 0.356 W/kg; SAR(10 g) = 0.221 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 62%

Maximum value of SAR (measured) = 0.492 W/kg

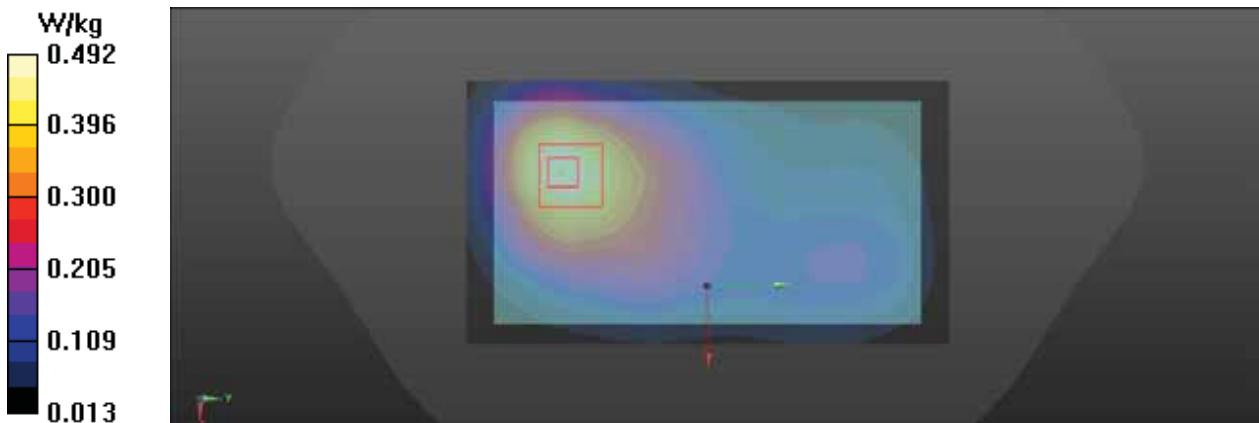

Test Laboratory: BACL SAR Testing Lab

252_LTE FDD Band 66_20M_QPSK_1RB_0Offset_Body Left_Ch 132322

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch132322/Area Scan (21x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0724 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.666 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.0860 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.030 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 58%

Maximum value of SAR (measured) = 0.0715 W/kg

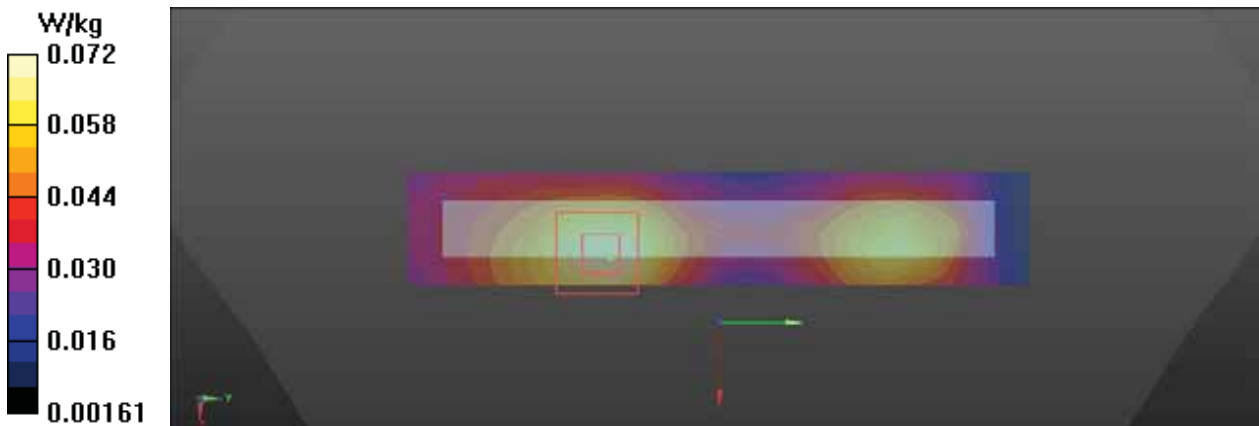

Test Laboratory: BACL SAR Testing Lab

253_LTE FDD Band 66_20M_QPSK_1RB_0Offset_Body Right_Ch 132322

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch132322/Area Scan (21x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.396 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.86 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.420 W/kg

SAR(1 g) = 0.244 W/kg; SAR(10 g) = 0.144 W/kg

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 57.7%

Maximum value of SAR (measured) = 0.353 W/kg

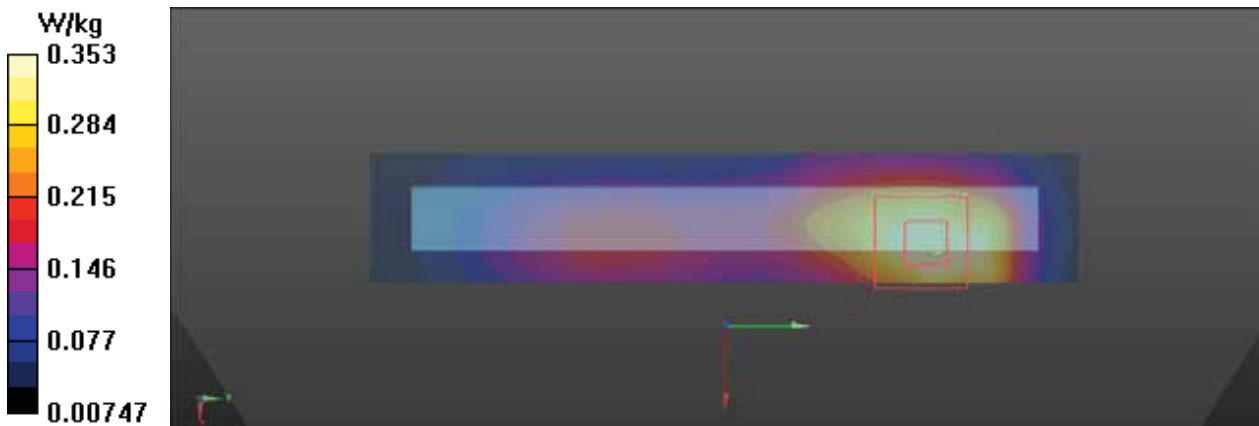

Test Laboratory: BACL SAR Testing Lab

254_LTE FDD Band 66_20M_QPSK_1RB_0Offset_Body Bottom_Ch 132322

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch132322/Area Scan (31x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.223 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.75 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.271 W/kg
SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.090 W/kg
Smallest distance from peaks to all points 3 dB below = 14.8 mm
Ratio of SAR at M2 to SAR at M1 = 59.4%
Maximum value of SAR (measured) = 0.231 W/kg

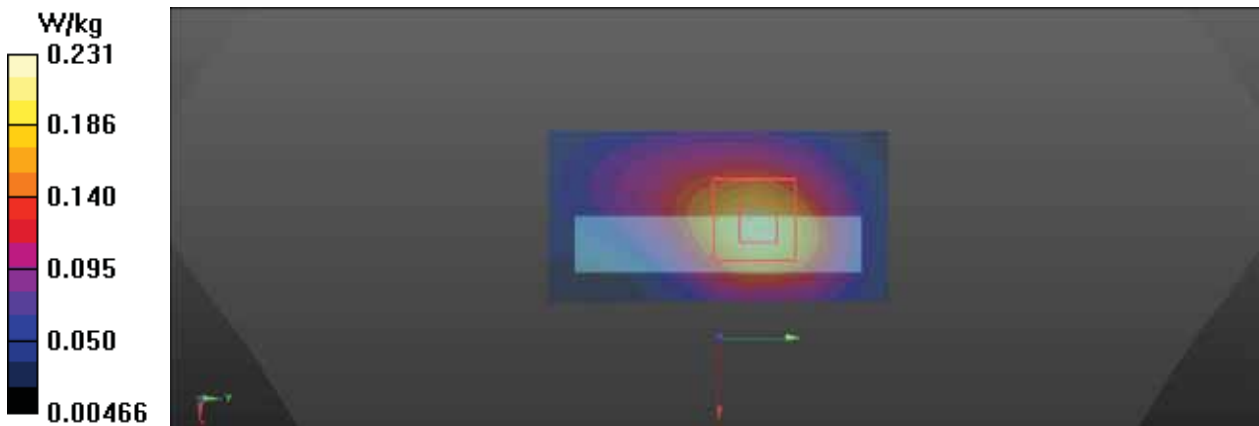

Test Laboratory: BACL SAR Testing Lab

255_LTE FDD Band 66_20M_QPSK_50%RB_0Offset_Body Front_Ch 132322

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch132322/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.337 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.05 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.378 W/kg

SAR(1 g) = 0.226 W/kg; SAR(10 g) = 0.139 W/kg

Smallest distance from peaks to all points 3 dB below = 17 mm

Ratio of SAR at M2 to SAR at M1 = 59.6%

Maximum value of SAR (measured) = 0.320 W/kg

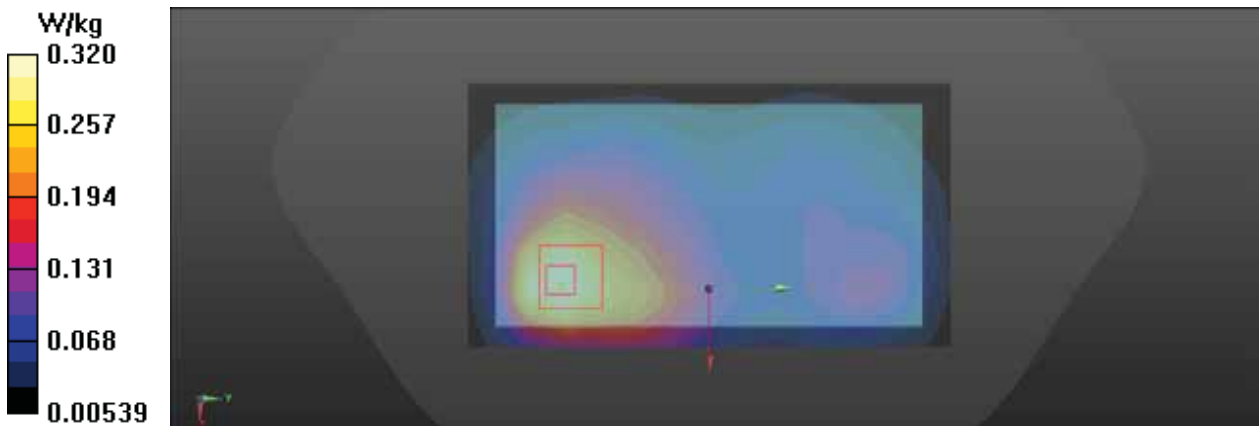

Test Laboratory: BACL SAR Testing Lab

256_LTE FDD Band 66_20M_QPSK_50%RB_0Offset_Body Back_Ch 132322

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch132322/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.433 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 18.29 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.496 W/kg
SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.187 W/kg
Smallest distance from peaks to all points 3 dB below = 20.5 mm
Ratio of SAR at M2 to SAR at M1 = 61.2%
Maximum value of SAR (measured) = 0.420 W/kg

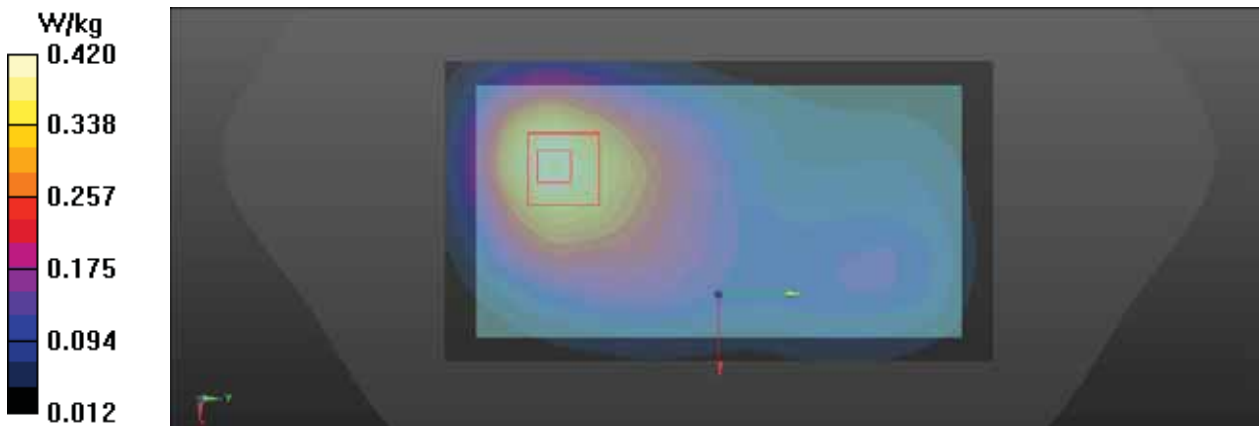

Test Laboratory: BACL SAR Testing Lab

257_LTE FDD Band 66_20M_QPSK_50%RB_0Offset_Body Left_Ch 132322

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch132322/Area Scan (31x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0606 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.180 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 0.0740 W/kg
SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.026 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 56.6%
Maximum value of SAR (measured) = 0.0614 W/kg

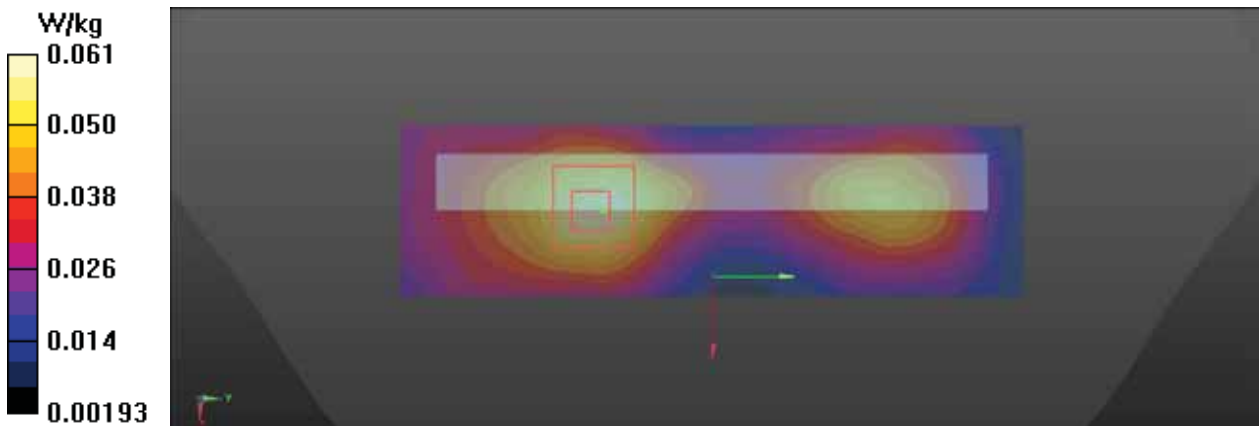

Test Laboratory: BACL SAR Testing Lab

258_LTE FDD Band 66_20M_QPSK_50%RB_0Offset_Body Right_Ch 132322

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch132322/Area Scan (21x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.332 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 14.42 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.348 W/kg
SAR(1 g) = 0.202 W/kg; SAR(10 g) = 0.119 W/kg
Smallest distance from peaks to all points 3 dB below = 15.2 mm
Ratio of SAR at M2 to SAR at M1 = 57.5%
Maximum value of SAR (measured) = 0.290 W/kg

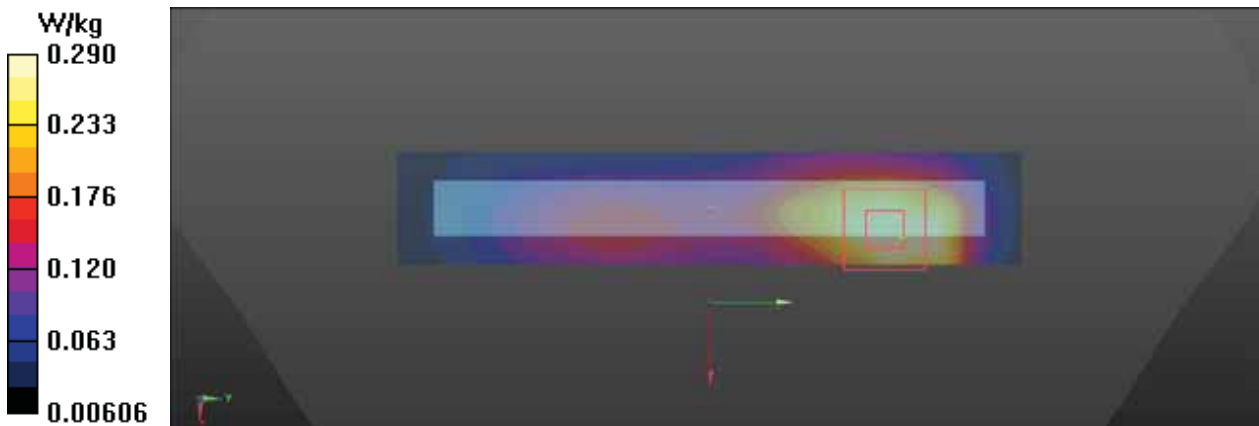

Test Laboratory: BACL SAR Testing Lab

259_LTE FDD Band 66_20M_QPSK_50%RB_0Offset_Body Bottom_Ch 132322

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch132322/Area Scan (31x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.189 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.79 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.231 W/kg
SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.077 W/kg
Smallest distance from peaks to all points 3 dB below = 14.8 mm
Ratio of SAR at M2 to SAR at M1 = 58.8%
Maximum value of SAR (measured) = 0.196 W/kg

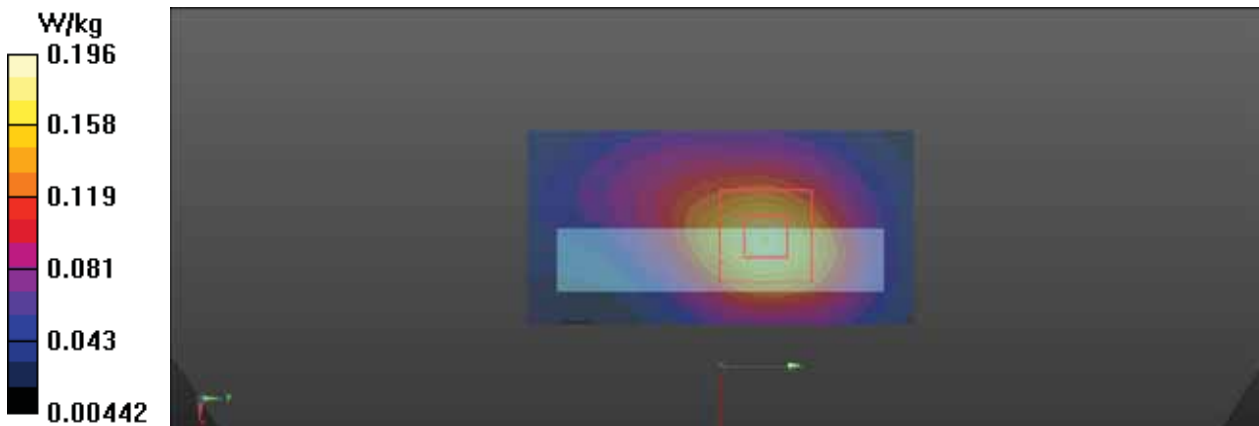

Test Laboratory: BACL SAR Testing Lab

261_LTE FDD Band 66_20M_QPSK_1RB_0Offset_Body Back_Ch 132322

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch132322/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.296 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.38 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.346 W/kg

SAR(1 g) = 0.211 W/kg; SAR(10 g) = 0.134 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 60.6%

Maximum value of SAR (measured) = 0.295 W/kg

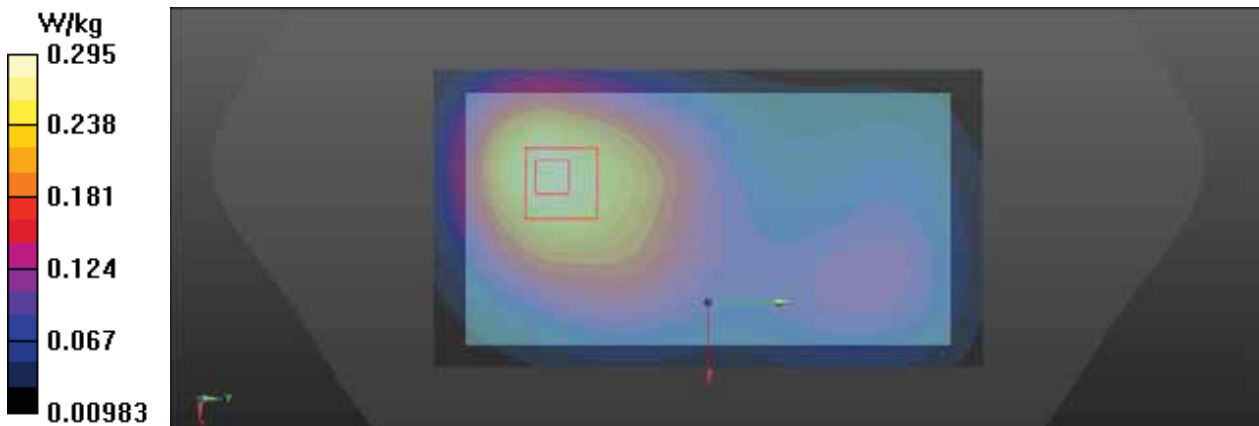

Test Laboratory: BACL SAR Testing Lab

260_LTE FDD Band 66_20M_QPSK_1RB_0Offset_Body Handheld Back_Ch 132322

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.396$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1745 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch132322/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 2.39 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 40.81 V/m; Power Drift = 0.02 dB



Peak SAR (extrapolated) = 3.15 W/kg

SAR(1 g) = 1.67 W/kg; SAR(10 g) = 0.955 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 56.4%

Maximum value of SAR (measured) = 2.44 W/kg

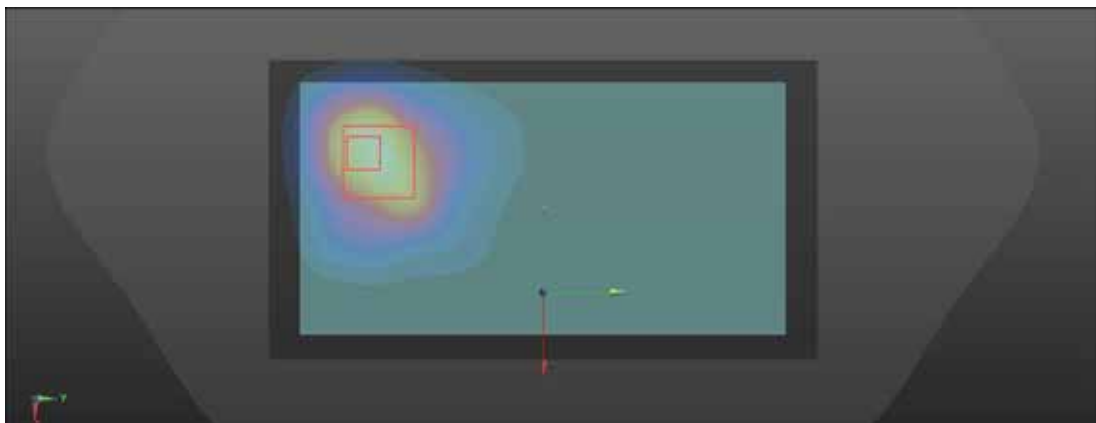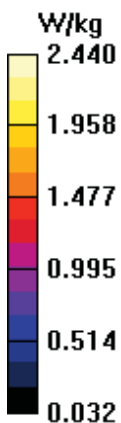

Test Laboratory:BACL.SAR TestingLab

102_LTE TDD Band 38_20M_QPSK_1RB_0Offset_Head Left Check_Ch 38000

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2595 MHz;Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 40.894$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2595 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch38000/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.186 W/kg

Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 9.404 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.217 W/kg
SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.065 W/kg
Smallest distance from peaks to all points 3 dB below = 12 mm
Ratio of SAR at M2 to SAR at M1 = 56.2%
Maximum value of SAR (measured) = 0.178 W/kg

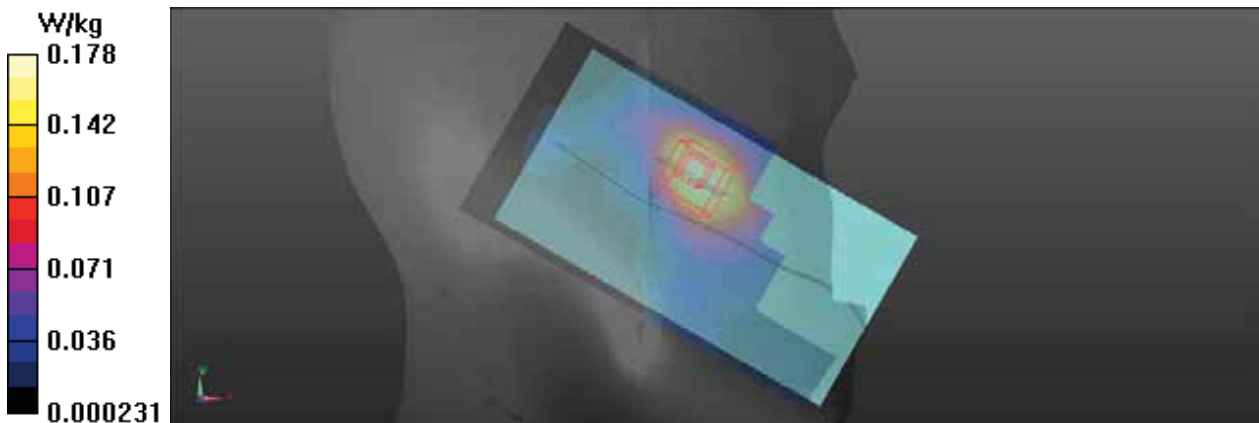

Test Laboratory:BACL.SAR TestingLab

103_LTE TDD Band 38_20M_QPSK_1RB_0Offset_Head Left Tilt_Ch 38000

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2595 MHz;Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 40.894$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2595 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch38000/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0884 W/kg

Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.886 V/m; Power Drift = 0.02 dB



Peak SAR (extrapolated) = 0.115 W/kg

SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.029 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 0.0935 W/kg

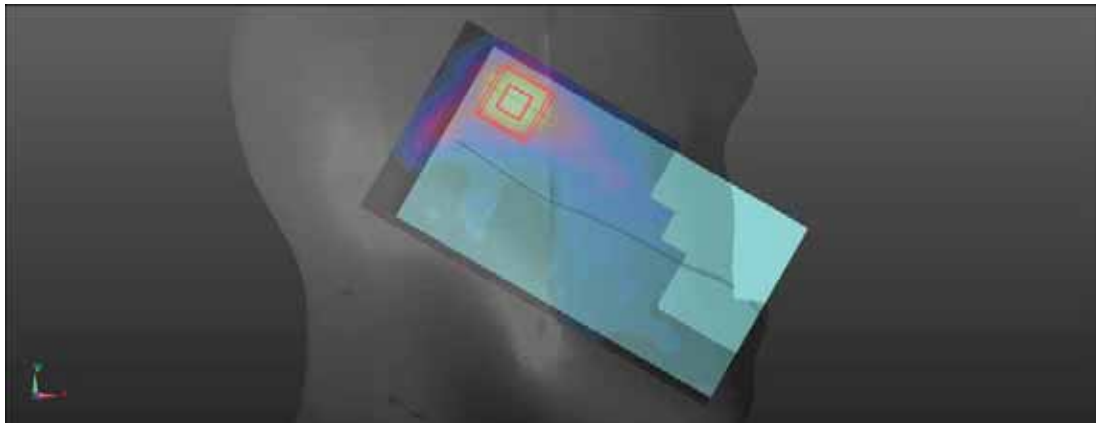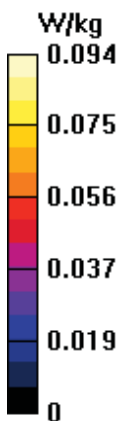

Test Laboratory:BACL.SAR TestingLab

104_LTE TDD Band 38_20M_QPSK_1RB_0Offset_Head Right Check_Ch 38000

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2595 MHz;Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 40.894$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2595 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch38000/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.287 W/kg

Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 10.68 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.333 W/kg
SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.097 W/kg
Smallest distance from peaks to all points 3 dB below = 10.6 mm
Ratio of SAR at M2 to SAR at M1 = 53.9%
Maximum value of SAR (measured) = 0.275 W/kg

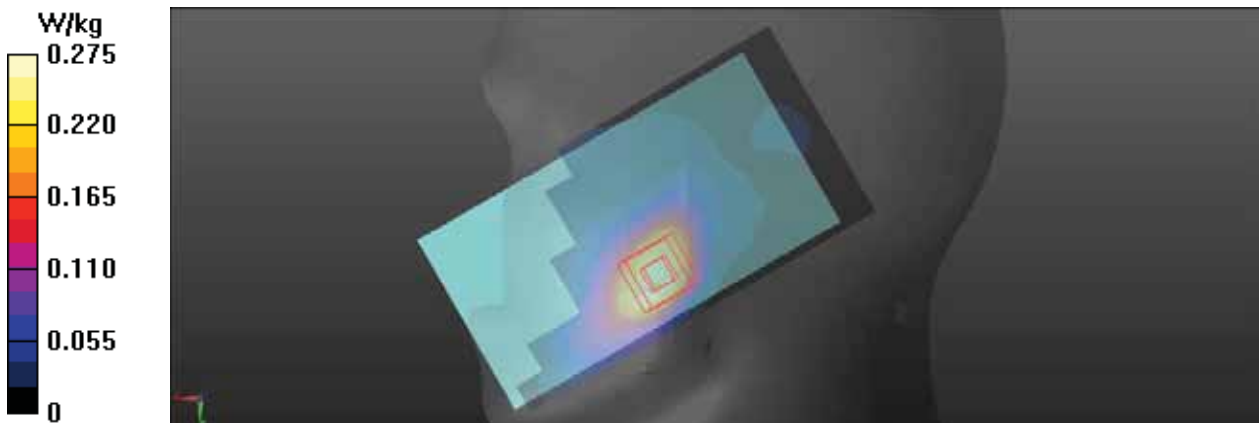

Test Laboratory:BACL.SAR TestingLab

105_LTE TDD Band 38_20M_QPSK_1RB_0Offset_Head Right Tilt_Ch 38000

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2595 MHz;Duty Cycle: 1:1.5787

Medium: HSL2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 40.894$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2595 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch38000/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0627 W/kg

Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.406 V/m; Power Drift = -0.02 dB



Peak SAR (extrapolated) = 0.0780 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.018 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 49%

Maximum value of SAR (measured) = 0.0637 W/kg

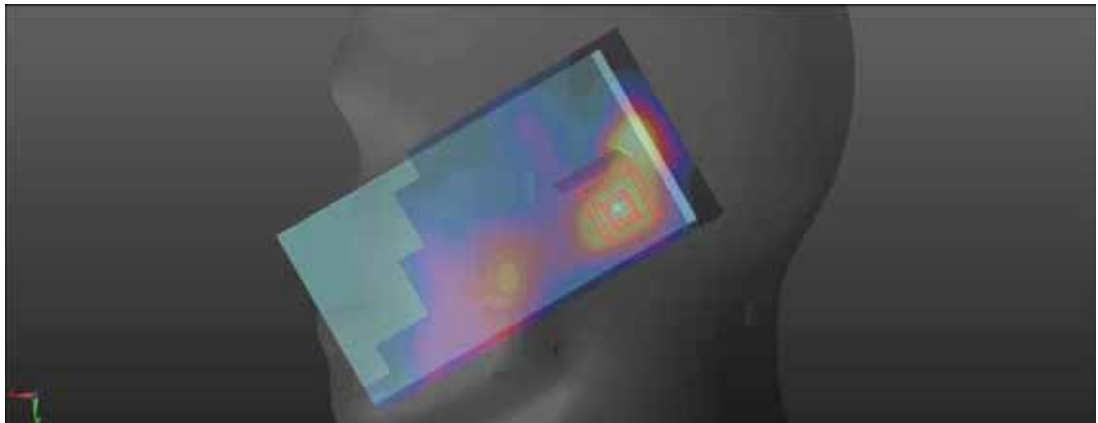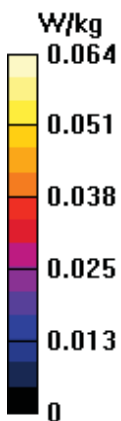

Test Laboratory: BACL SAR Testing Lab

106_LTE TDD Band 38_20M_QPSK_50%RB_0Offset_Head Left Check_Ch 3800 0

DUT: T5810



Communication System: UID 0, LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 40.894$; $\rho = 1000$
kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2595 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch38000/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.147 W/kg

Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 8.468 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.172 W/kg
SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.050 W/kg
Smallest distance from peaks to all points 3 dB below = 14.1 mm
Ratio of SAR at M2 to SAR at M1 = 55.7%
Maximum value of SAR (measured) = 0.145 W/kg

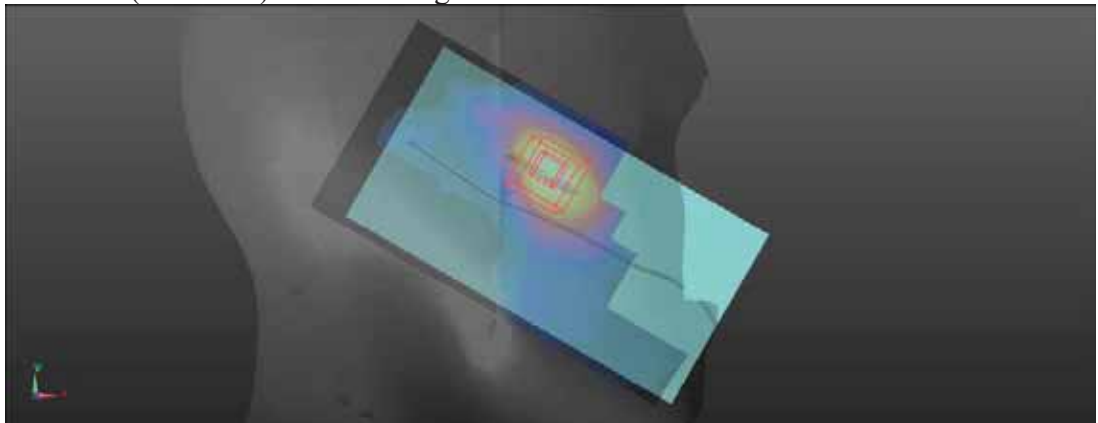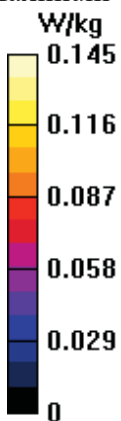

Test Laboratory:BACL.SAR TestingLab

107_LTE TDD Band 38_20M_QPSK_50%RB_0Offset_Head Left Tilt_Ch 38000

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2595 MHz;Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 40.894$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2595 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch38000/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0897 W/kg

Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.758 V/m; Power Drift = 0.08 dB



Peak SAR (extrapolated) = 0.114 W/kg

SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.027 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 50.4%

Maximum value of SAR (measured) = 0.0932 W/kg

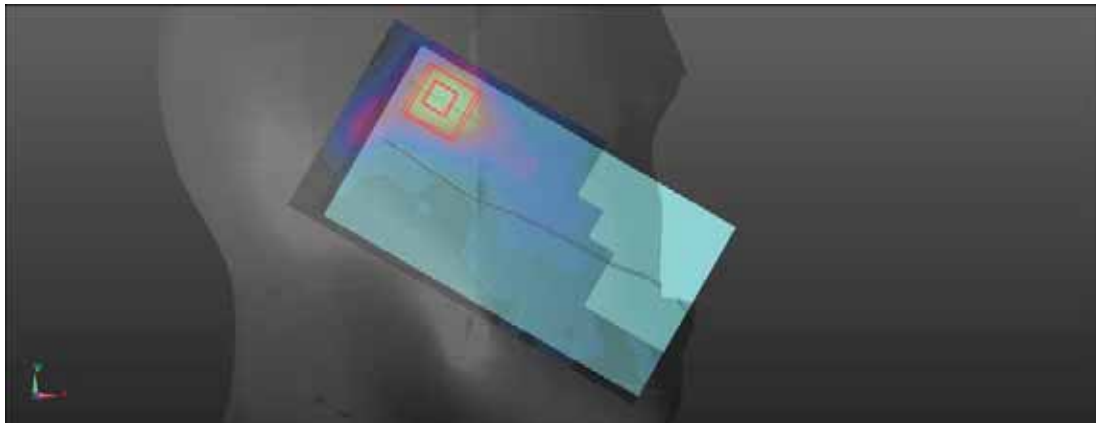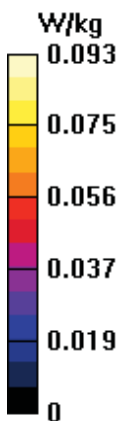

Test Laboratory: BACL SAR Testing Lab

108_LTE TDD Band 38_20M_QPSK_50%RB_0Offset_Head Right Check_Ch 38000

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 40.894$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2595 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch38000/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.233 W/kg

Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 9.638 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 0.271 W/kg
SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.078 W/kg
Smallest distance from peaks to all points 3 dB below = 10.6 mm
Ratio of SAR at M2 to SAR at M1 = 52.8%
Maximum value of SAR (measured) = 0.224 W/kg

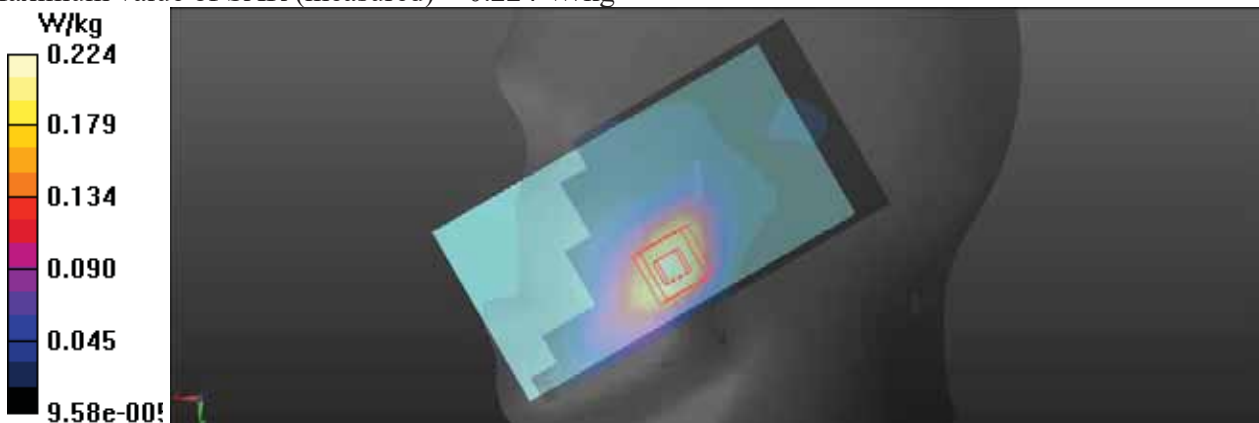

Test Laboratory:BACL.SAR TestingLab

109_LTE TDD Band 38_20M_QPSK_50%RB_0Offset_Head Right Tilt_Ch 38000

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2595 MHz;Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 40.894$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2595 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch38000/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0602 W/kg

Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.829 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.0950 W/kg
SAR(1 g) = 0.0322 W/kg; SAR(10 g) = 0.013 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 43.7%
Maximum value of SAR (measured) = 0.0536 W/kg

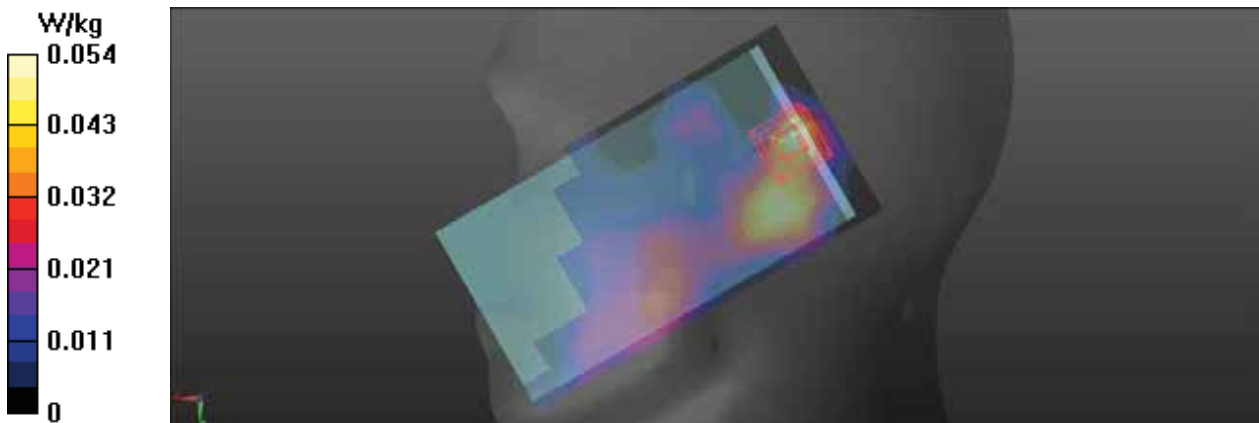

Test Laboratory:BACL.SAR TestingLab

110_LTE TDD Band 38_20M_QPSK_1RB_0Offset_Head Right Check_Ch 38000

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2595 MHz;Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 40.894$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2595 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch38000/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.237 W/kg

Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.665 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.278 W/kg

SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.083 W/kg

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.6%

Maximum value of SAR (measured) = 0.231 W/kg

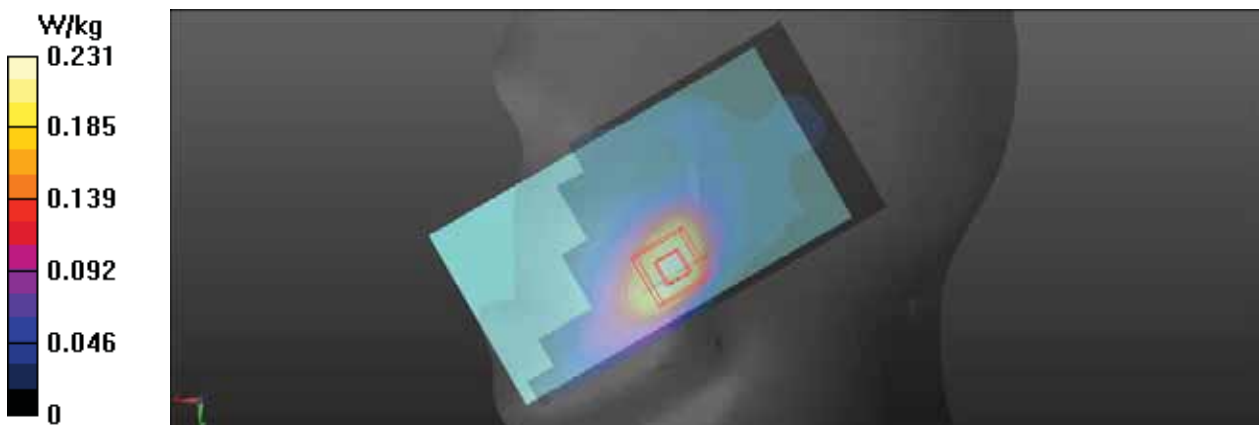

Test Laboratory: BACL SAR Testing Lab

286_LTE TDD Band 38_20M_QPSK_1RB_0Offset_Body Front_Ch 38000

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 40.894$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2595 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch38000/Area Scan (81x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.279 W/kg

Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.143 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 0.327 W/kg

SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.090 W/kg

Smallest distance from peaks to all points 3 dB below = 13.9 mm

Ratio of SAR at M2 to SAR at M1 = 51.4%

Maximum value of SAR (measured) = 0.266 W/kg

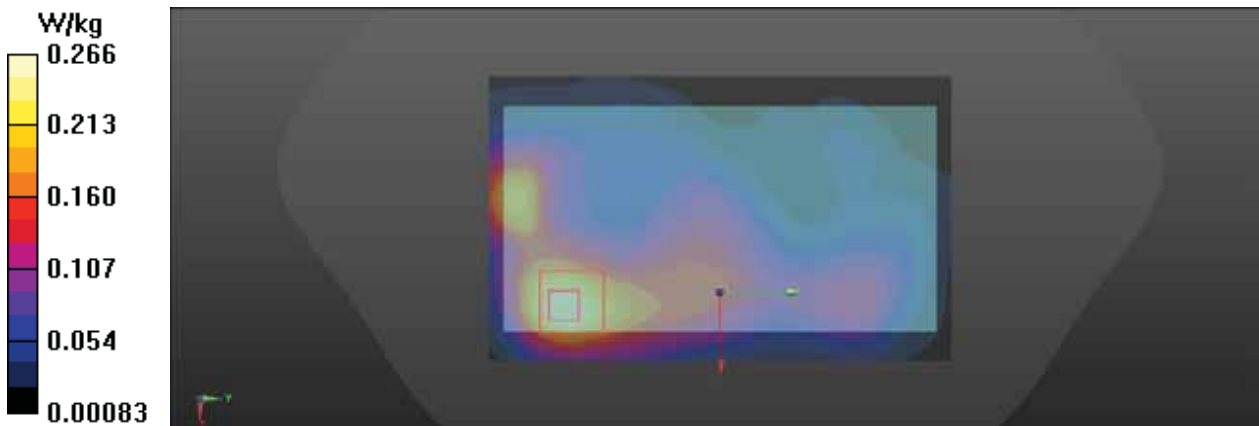

Test Laboratory:BACL.SAR TestingLab

287_LTE TDD Band 38_20M_QPSK_1RB_0Offset_Body Back_Ch 38000

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2595 MHz;Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 40.894$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2595 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch38000/Area Scan (81x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.208 W/kg

Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.15 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 0.253 W/kg

SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.073 W/kg

Smallest distance from peaks to all points 3 dB below = 17 mm

Ratio of SAR at M2 to SAR at M1 = 48.7%

Maximum value of SAR (measured) = 0.204 W/kg

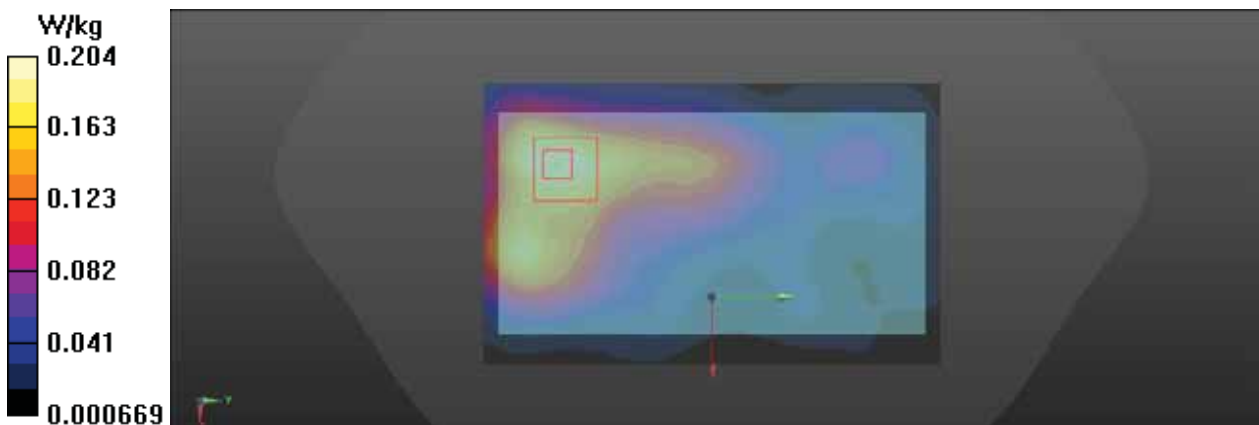

Test Laboratory:BACL.SAR TestingLab

288_LTE TDD Band 38_20M_QPSK_1RB_0Offset_Body Left_Ch 38000

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2595 MHz;Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 40.894$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2595 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch38000/Area Scan (41x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0309 W/kg

Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.739 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.0370 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.00876 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 45%

Maximum value of SAR (measured) = 0.0294 W/kg

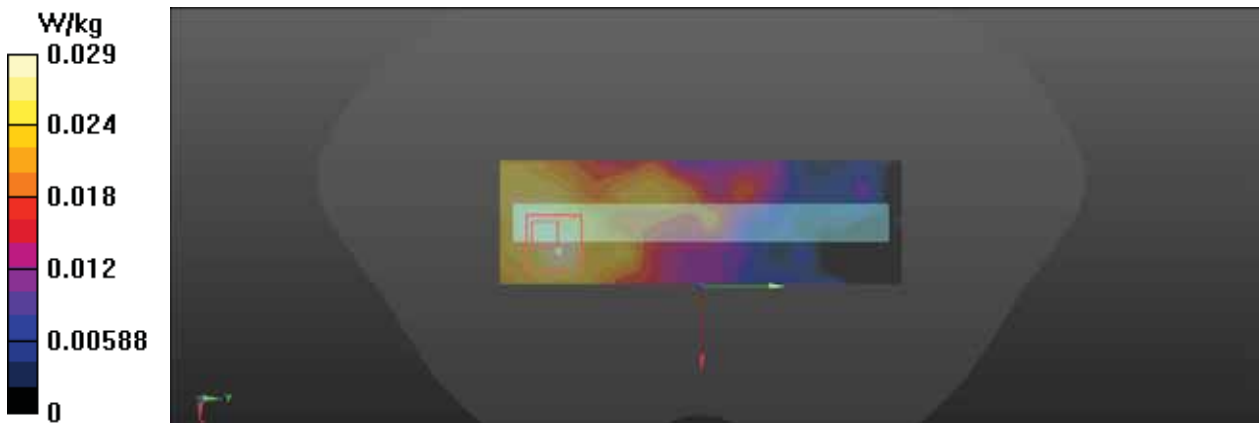

Test Laboratory: BACL SAR Testing Lab

289_LTE TDD Band 38_20M_QPSK_1RB_0Offset_Body Right_Ch 38000

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 40.894$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2595 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch38000/Area Scan (41x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.417 W/kg

Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.75 V/m; Power Drift = -0.01 dB



Peak SAR (extrapolated) = 0.510 W/kg

SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.120 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 47.6%

Maximum value of SAR (measured) = 0.402 W/kg

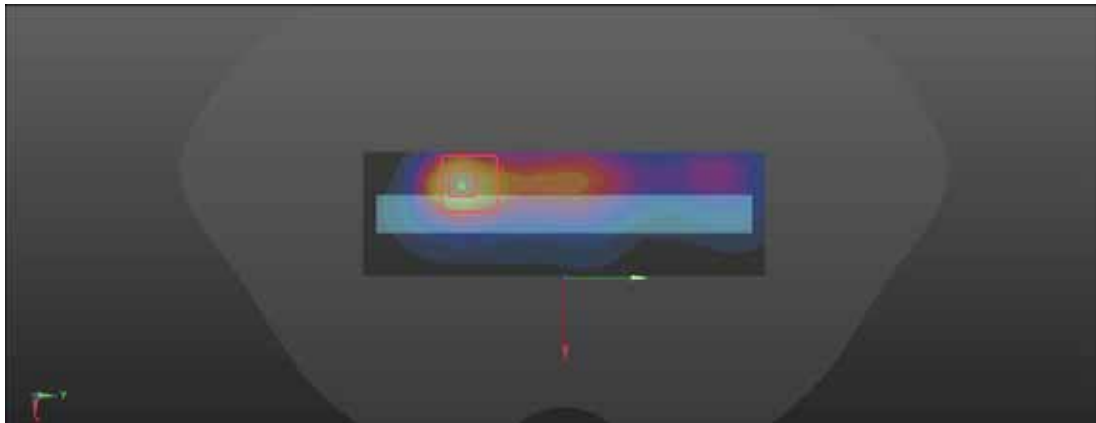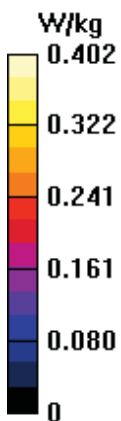

Test Laboratory:BACL.SAR TestingLab

290_LTE TDD Band 38_20M_QPSK_1RB_0Offset_Body Bottom_Ch 38000

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2595 MHz;Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 40.894$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2595 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch38000/Area Scan (41x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.355 W/kg

Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 12.97 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.414 W/kg
SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.100 W/kg
Smallest distance from peaks to all points 3 dB below = 11 mm
Ratio of SAR at M2 to SAR at M1 = 51%
Maximum value of SAR (measured) = 0.339 W/kg

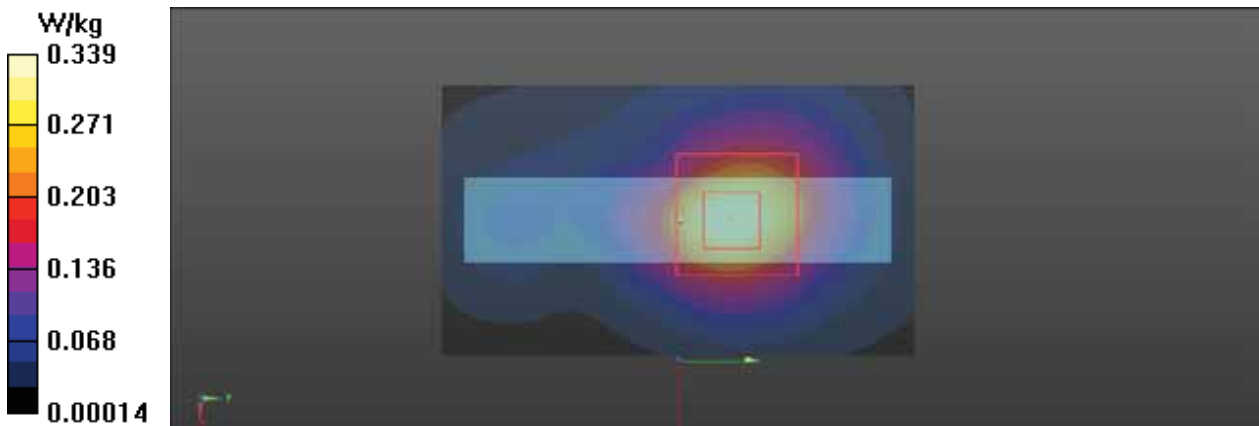

Test Laboratory: BACL SAR Testing Lab

291_LTE TDD Band 38_20M_QPSK_50%RB_0Offset_Body Front_Ch 38000

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 40.894$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2595 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch38000/Area Scan (81x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.227 W/kg

Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.307 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.275 W/kg

SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.073 W/kg

Smallest distance from peaks to all points 3 dB below = 13.3 mm

Ratio of SAR at M2 to SAR at M1 = 50.5%

Maximum value of SAR (measured) = 0.223 W/kg

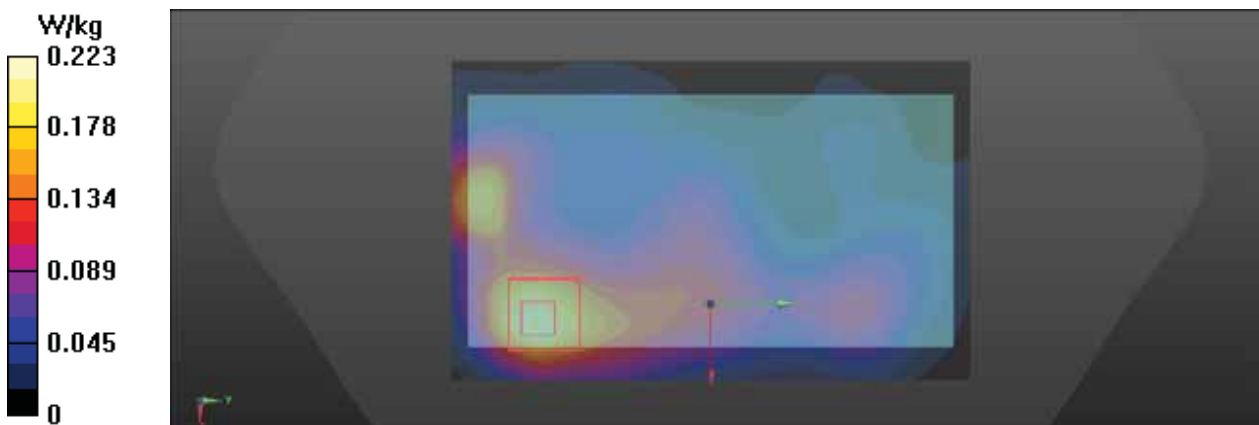

Test Laboratory: BACL SAR Testing Lab

292_LTE TDD Band 38_20M_QPSK_50%RB_0Offset_Body Back_Ch 38000

DUT: T5810



Communication System: UID 0, LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 40.894$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2595 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch38000/Area Scan (81x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.168 W/kg

Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 9.197 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 0.204 W/kg
SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.058 W/kg
Smallest distance from peaks to all points 3 dB below = 17.1 mm
Ratio of SAR at M2 to SAR at M1 = 50.1%
Maximum value of SAR (measured) = 0.165 W/kg

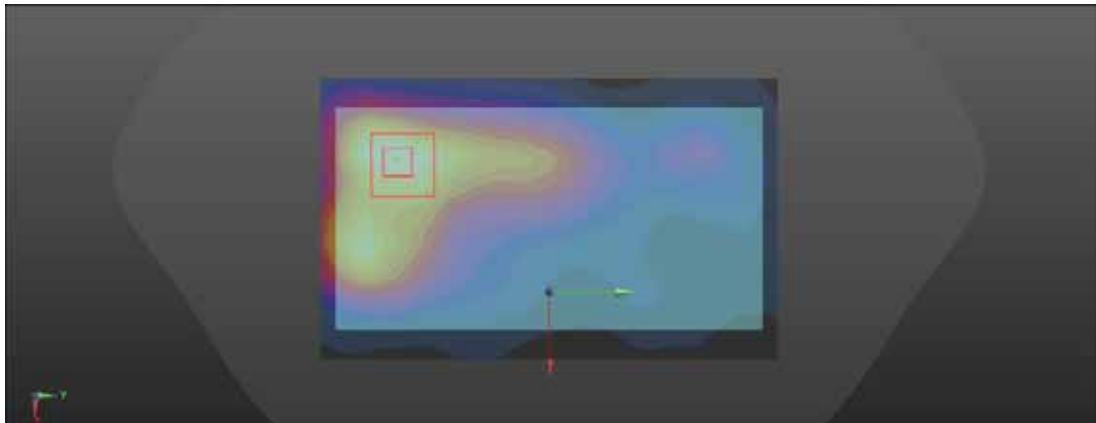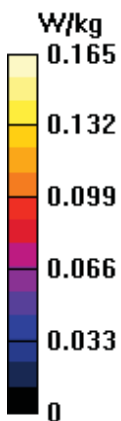

Test Laboratory: BACL SAR Testing Lab

293_LTE TDD Band 38_20M_QPSK_50%RB_0Offset_Body Left_Ch 38000

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 40.894$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2595 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch38000/Area Scan (41x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0276 W/kg

Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.286 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.0360 W/kg

SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.00727 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 35%

Maximum value of SAR (measured) = 0.0256 W/kg

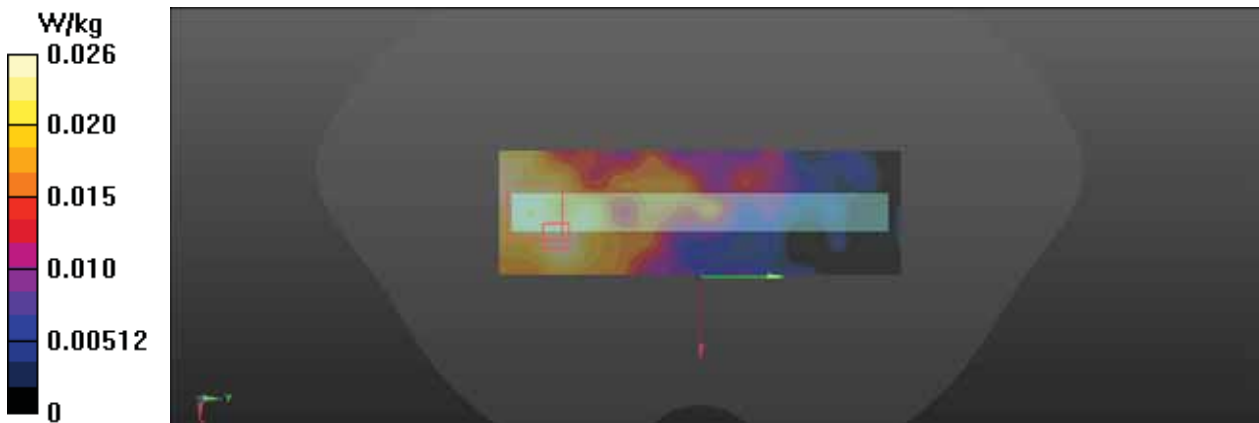

Test Laboratory: BACL SAR Testing Lab

294_LTE TDD Band 38_20M_QPSK_50%RB_0Offset_Body Right_Ch 38000

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 40.894$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2595 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch38000/Area Scan (41x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.348 W/kg

Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 9.598 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.414 W/kg
SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.097 W/kg
Smallest distance from peaks to all points 3 dB below = 11.7 mm
Ratio of SAR at M2 to SAR at M1 = 47.8%
Maximum value of SAR (measured) = 0.324 W/kg

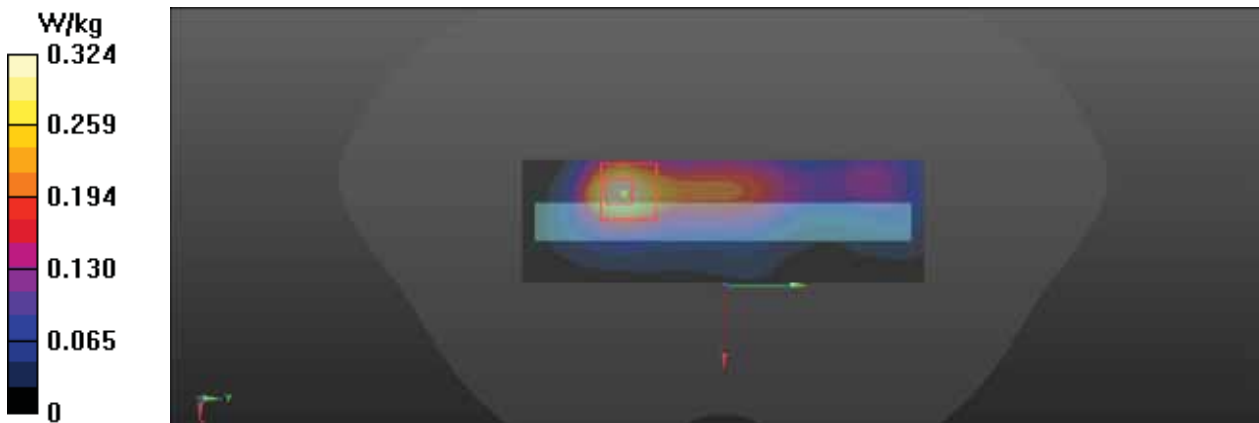

Test Laboratory: BACL SAR Testing Lab

295_LTE TDD Band 38_20M_QPSK_50%RB_0Offset_Body Bottom_Ch 38000

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.5787

Medium: HSL2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 40.894$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2595 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch38000/Area Scan (41x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.301 W/kg

Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.85 V/m; Power Drift = -0.01 dB



Peak SAR (extrapolated) = 0.356 W/kg

SAR(1 g) = 0.178 W/kg; SAR(10 g) = 0.085 W/kg

Smallest distance from peaks to all points 3 dB below = 10.6 mm

Ratio of SAR at M2 to SAR at M1 = 50.8%

Maximum value of SAR (measured) = 0.287 W/kg

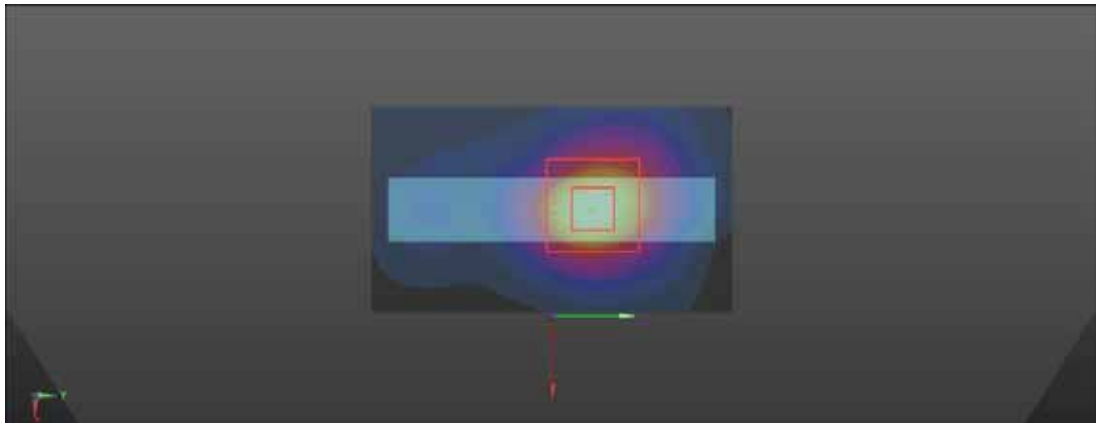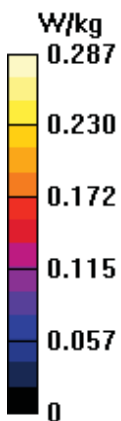

Test Laboratory: BACL SAR Testing Lab

297_LTE TDD Band 38_20M_QPSK_1RB_0Offset_Body Right_Ch 38000

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 40.894$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2595 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch38000/Area Scan (41x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.422 W/kg

Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 10.80 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.503 W/kg
SAR(1 g) = 0.244 W/kg; SAR(10 g) = 0.119 W/kg
Smallest distance from peaks to all points 3 dB below = 11.3 mm
Ratio of SAR at M2 to SAR at M1 = 48%
Maximum value of SAR (measured) = 0.395 W/kg

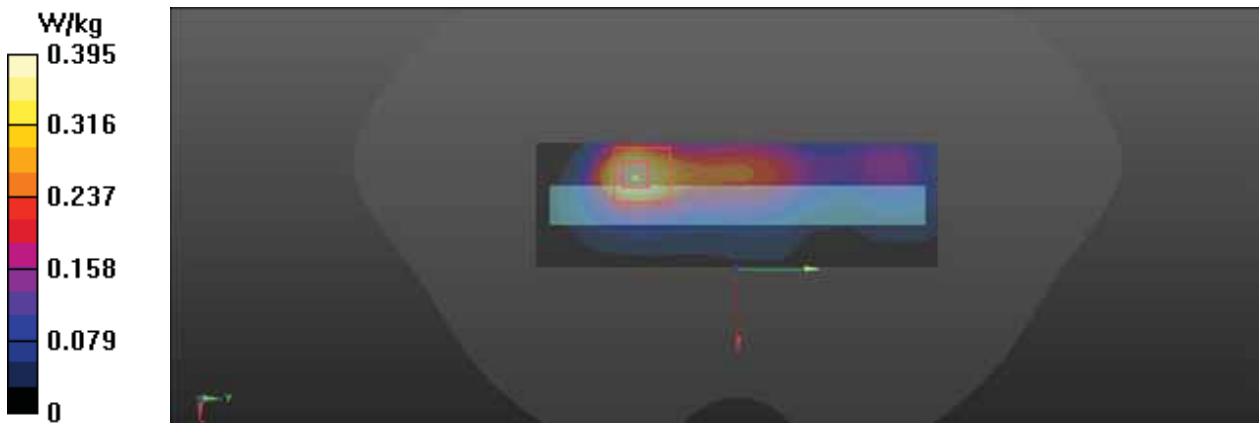

Test Laboratory:BACL.SAR TestingLab

296_LTE TDD Band 38_20M_QPSK_1RB_0Offset_Body Handheld Right_Ch 38000

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2595 MHz;Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 40.894$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2595 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch38000/Area Scan (41x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 2.46 W/kg

Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.87 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 3.98 W/kg

SAR(1 g) = 1.25 W/kg; SAR(10 g) = 0.532 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 25.1%

Maximum value of SAR (measured) = 2.43 W/kg

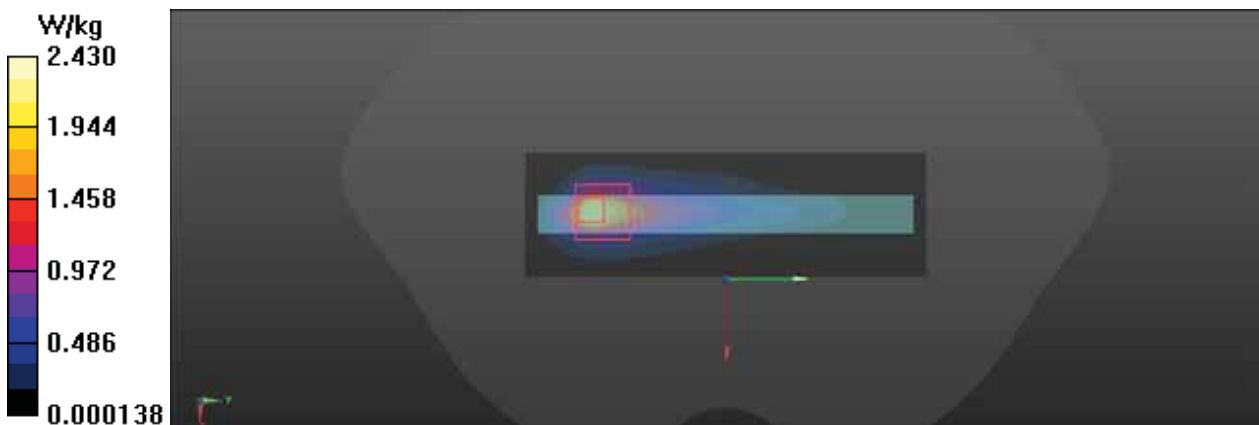

Test Laboratory:BACL.SAR TestingLab

111_LTE TDD Band 41_20M_QPSK_1RB_0Offset_Head Left Check_Ch 40740

DUT: T5810



Communication System: UID 0, LTE (0); Frequency: 2605 MHz;Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2605$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 40.888$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2605 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch40740/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.161 W/kg

Ch40740/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 8.374 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.193 W/kg
SAR(1 g) = 0.106 W/kg; SAR(10 g) = 0.055 W/kg
Smallest distance from peaks to all points 3 dB below = 12.2 mm
Ratio of SAR at M2 to SAR at M1 = 53.1%
Maximum value of SAR (measured) = 0.160 W/kg

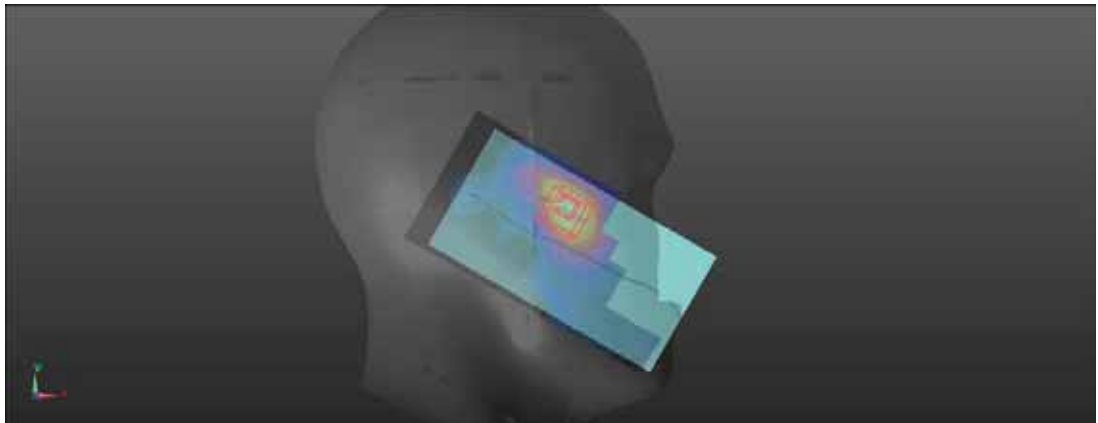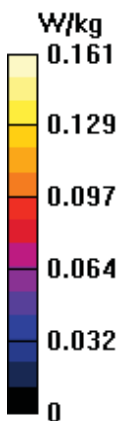

Test Laboratory:BACL.SAR TestingLab

112_LTE TDD Band 41_20M_QPSK_1RB_0Offset_Head Left Tilt_Ch 40740

DUT: T5810



Communication System: UID 0, LTE (0); Frequency: 2605 MHz;Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2605$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 40.888$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2605 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch40740/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.116 W/kg

Ch40740/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.963 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.153 W/kg
SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.035 W/kg
Smallest distance from peaks to all points 3 dB below = 12.6 mm
Ratio of SAR at M2 to SAR at M1 = 49.1%
Maximum value of SAR (measured) = 0.125 W/kg

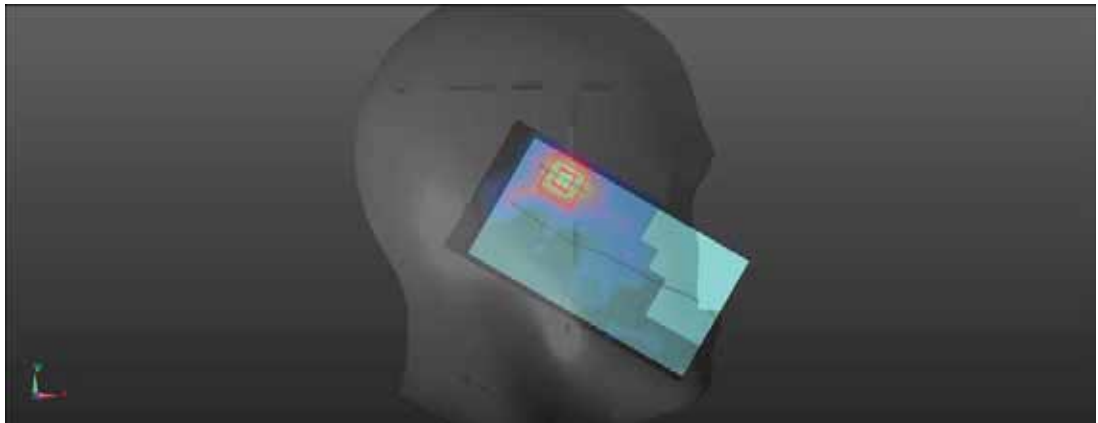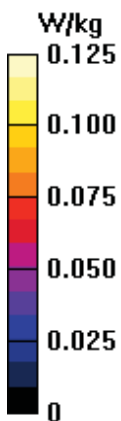

Test Laboratory:BACL.SAR TestingLab

113_LTE TDD Band 41_20M_QPSK_1RB_0Offset_Head Right Check_Ch 40740

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2605 MHz;Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2605$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 40.888$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2605 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch40740/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.272 W/kg

Ch40740/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.19 V/m; Power Drift = -0.04 dB



Peak SAR (extrapolated) = 0.335 W/kg

SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.094 W/kg

Smallest distance from peaks to all points 3 dB below = 11.1 mm

Ratio of SAR at M2 to SAR at M1 = 53.3%

Maximum value of SAR (measured) = 0.278 W/kg

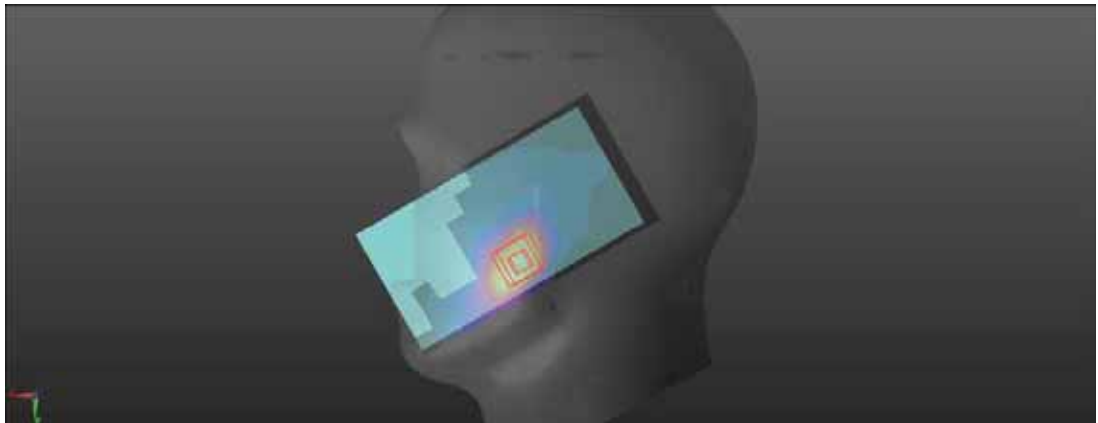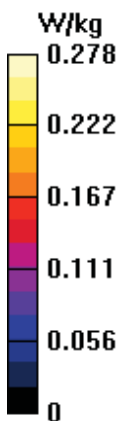

Test Laboratory:BACL.SAR TestingLab

114_LTE TDD Band 41_20M_QPSK_1RB_0Offset_Head Right Tilt_Ch 40740

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2605 MHz;Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2605$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 40.888$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2605 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch40740/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0752 W/kg

Ch40740/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.477 V/m; Power Drift = -0.18 dB



Peak SAR (extrapolated) = 0.0920 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.018 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 46.7%

Maximum value of SAR (measured) = 0.0738 W/kg

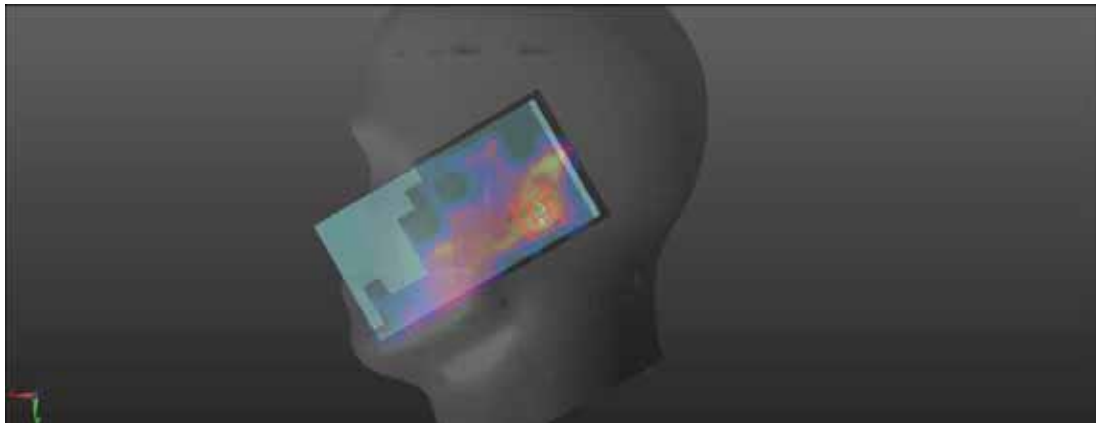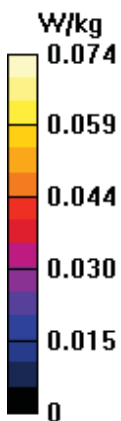

Test Laboratory: BACL SAR Testing Lab

115_LTE TDD Band 41_20M_QPSK_50%RB_0Offset_Head Left Check_Ch 40740

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2605$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 40.888$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2605 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch40740/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.134 W/kg

Ch40740/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 7.531 V/m; Power Drift = 0.13 dB
Peak SAR (extrapolated) = 0.154 W/kg
SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.044 W/kg
Smallest distance from peaks to all points 3 dB below = 15 mm
Ratio of SAR at M2 to SAR at M1 = 54%
Maximum value of SAR (measured) = 0.128 W/kg

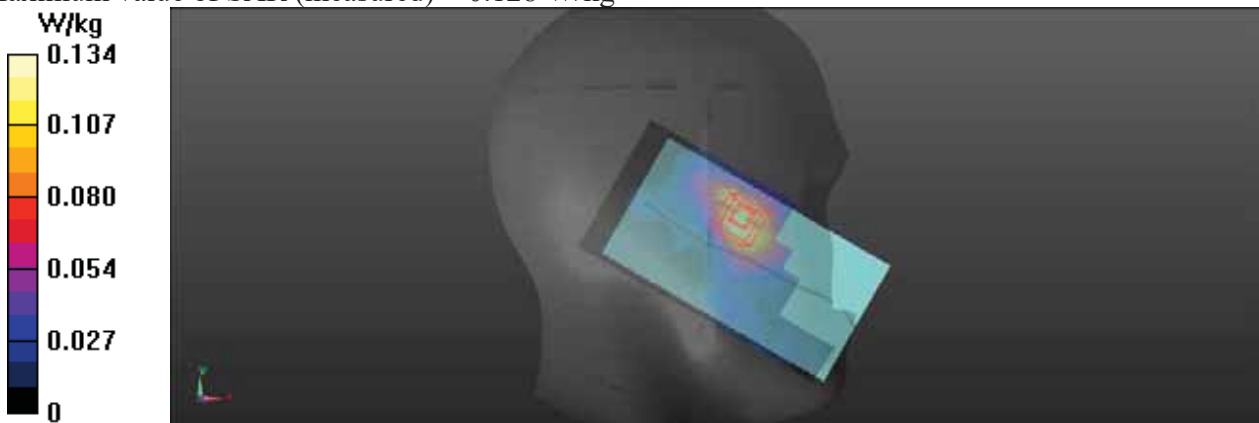

Test Laboratory:BACL.SAR TestingLab

116_LTE TDD Band 41_20M_QPSK_50%RB_0Offset_Head Left Tilt_Ch 40740

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2605 MHz;Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2605$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 40.888$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2605 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch40740/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0928 W/kg

Ch40740/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.205 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.118 W/kg

SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.027 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 51%

Maximum value of SAR (measured) = 0.0979 W/kg

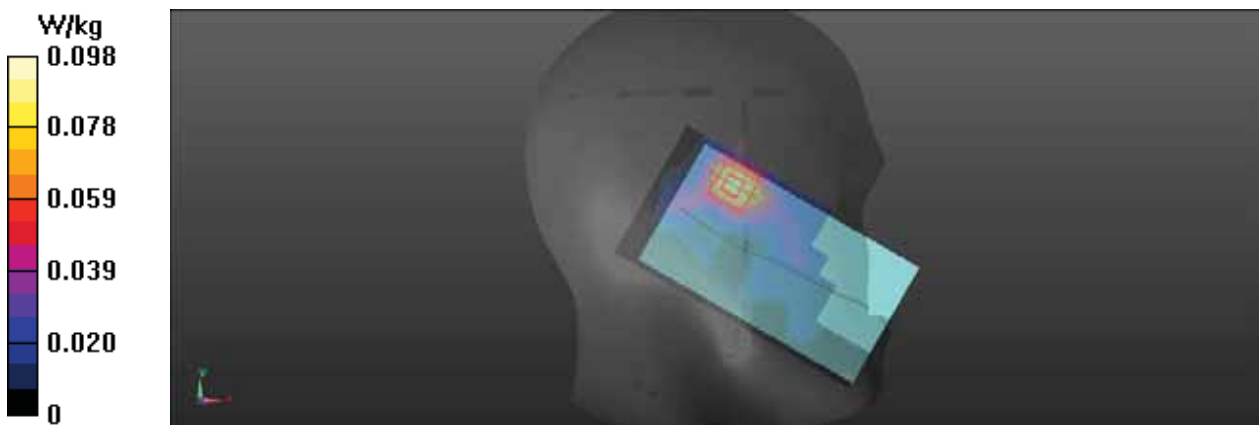

Test Laboratory: BACL SAR Testing Lab

117_LTE TDD Band 41_20M_QPSK_50%RB_0Offset_Head Right Check_Ch 40740

DUT: T5810



Communication System: UID 0, LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2605$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 40.888$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2605 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch40740/Area Scan (71x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.218 W/kg

Ch40740/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 8.949 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.264 W/kg
SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.073 W/kg
Smallest distance from peaks to all points 3 dB below = 11.1 mm
Ratio of SAR at M2 to SAR at M1 = 52.4%
Maximum value of SAR (measured) = 0.219 W/kg

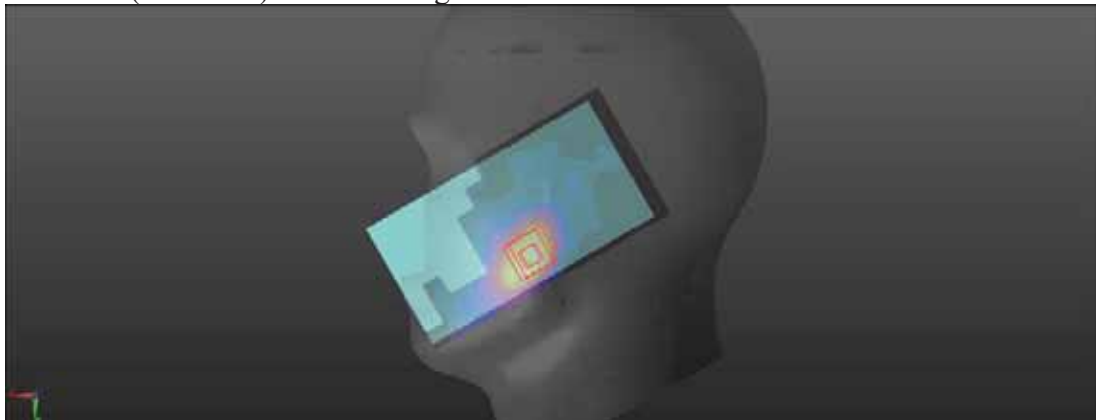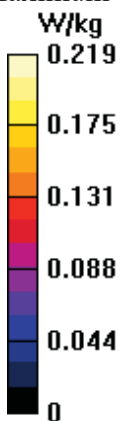

Test Laboratory:BACL.SAR TestingLab

118_LTE TDD Band 41_20M_QPSK_50%RB_0Offset_Head Right Tilt_Ch 40740

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2605 MHz;Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2605$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 40.888$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2605 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch40740/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0598 W/kg

Ch40740/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.959 V/m; Power Drift = 0.07 dB



Peak SAR (extrapolated) = 0.0730 W/kg

SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.016 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 45.1%

Maximum value of SAR (measured) = 0.0629 W/kg

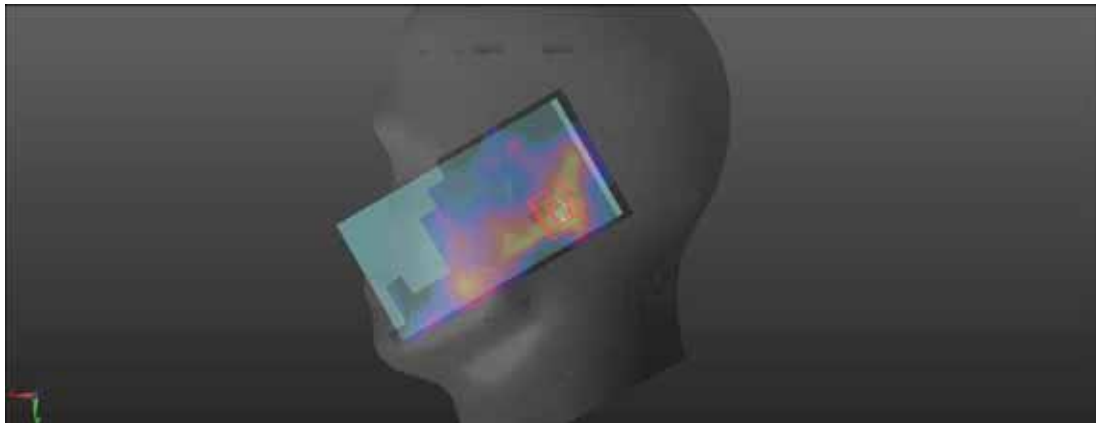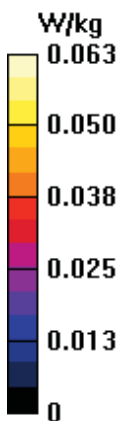

Test Laboratory:BACL.SAR TestingLab

119_LTE TDD Band 41_20M_QPSK_1RB_0Offset_Head Right Check_Ch 40740

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2605 MHz;Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2605$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 40.888$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2605 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch40740/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.276 W/kg

Ch40740/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.960 V/m; Power Drift = -0.06 dB



Peak SAR (extrapolated) = 0.315 W/kg

SAR(1 g) = 0.170 W/kg; SAR(10 g) = 0.089 W/kg

Smallest distance from peaks to all points 3 dB below = 10.6 mm

Ratio of SAR at M2 to SAR at M1 = 52.8%

Maximum value of SAR (measured) = 0.259 W/kg

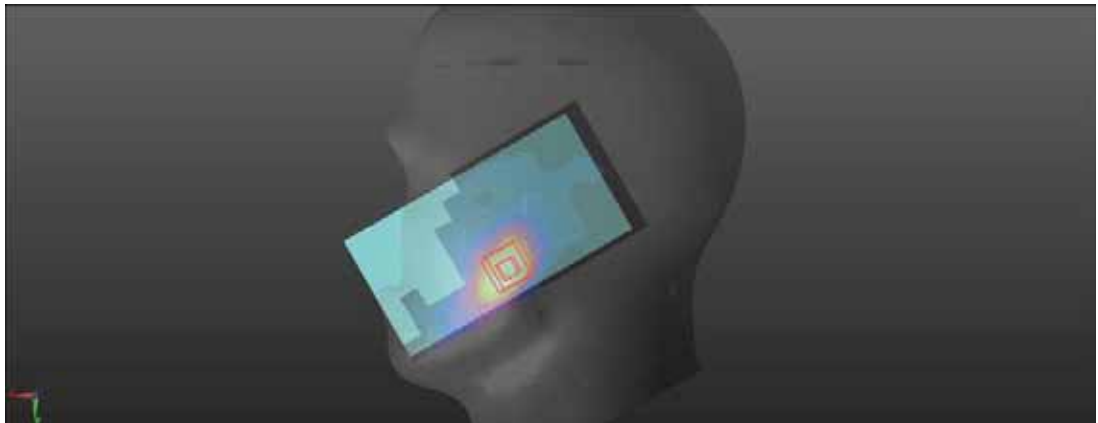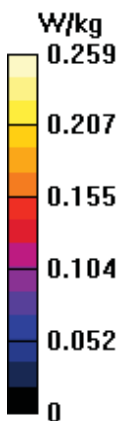

Test Laboratory: BACL SAR Testing Lab

298_LTE TDD Band 41_20M_QPSK_1RB_0Offset_Body Front_Ch 40740

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2605$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 40.888$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2605 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Configuration/Ch40740/Area Scan (81x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.251 W/kg

Configuration/Ch40740/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.570 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 0.305 W/kg

SAR(1 g) = 0.154 W/kg; SAR(10 g) = 0.078 W/kg

Smallest distance from peaks to all points 3 dB below = 13.5 mm

Ratio of SAR at M2 to SAR at M1 = 48.8%

Maximum value of SAR (measured) = 0.246 W/kg

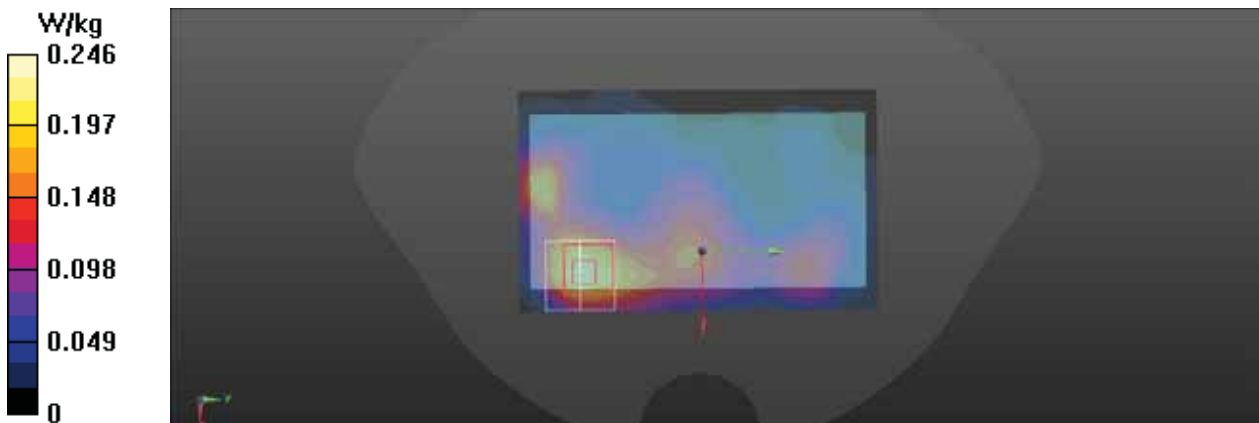

Test Laboratory: BACL SAR Testing Lab

299_LTE TDD Band 41_20M_QPSK_1RB_0Offset_Body Back_Ch 40740

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2605$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 40.888$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2605 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch40740/Area Scan (81x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.177 W/kg

Ch40740/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.476 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 0.224 W/kg

SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.058 W/kg

Smallest distance from peaks to all points 3 dB below = 17.1 mm

Ratio of SAR at M2 to SAR at M1 = 44.6%

Maximum value of SAR (measured) = 0.175 W/kg

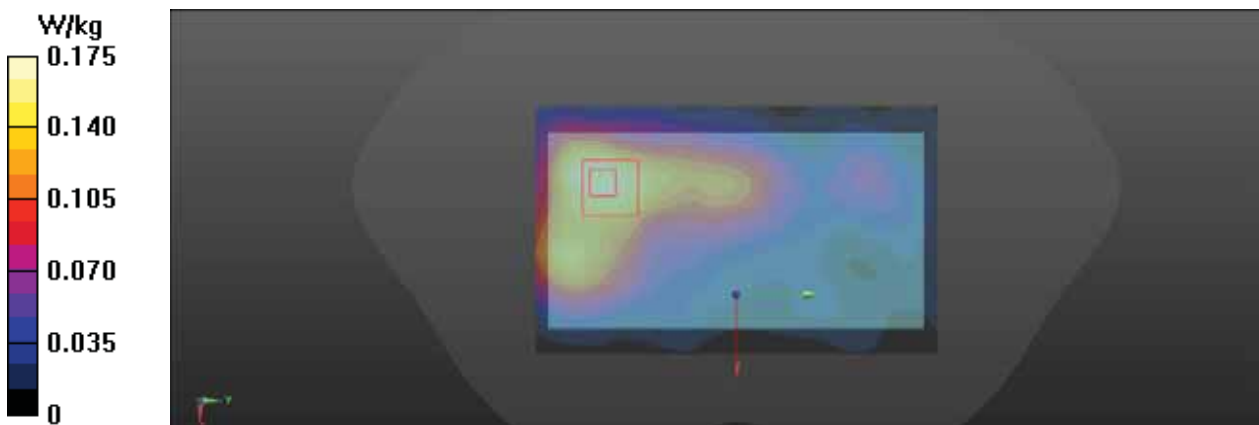

Test Laboratory: BACL SAR Testing Lab

300_LTE TDD Band 41_20M_QPSK_1RB_0Offset_Body Left_Ch 40740

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2605$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 40.888$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2605 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch40740/Area Scan (41x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0308 W/kg

Ch40740/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.675 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.0500 W/kg

SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.00759 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 33.1%

Maximum value of SAR (measured) = 0.0336 W/kg

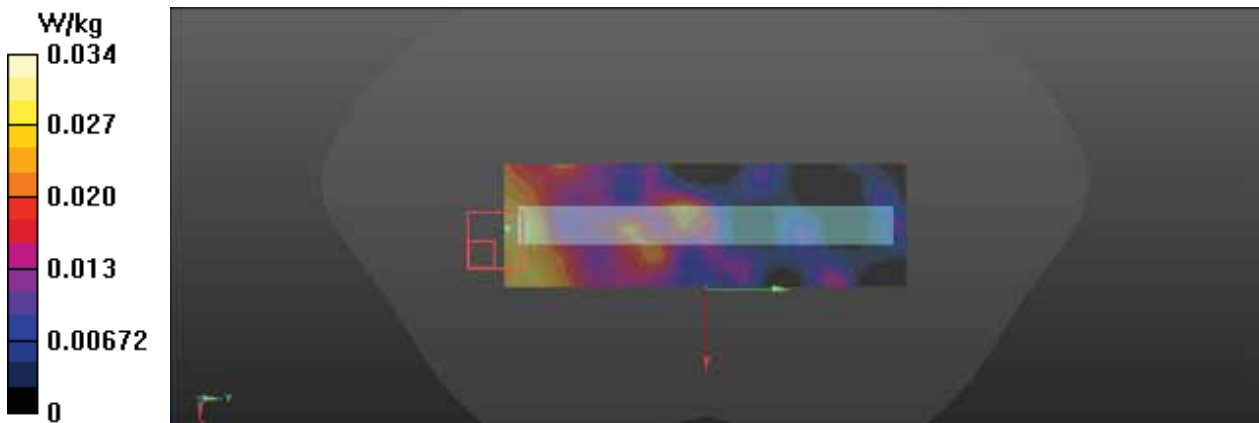

Test Laboratory:BACL.SAR TestingLab

301_LTE TDD Band 41_20M_QPSK_1RB_0Offset_Body Right_Ch 40740

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2605 MHz;Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2605$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 40.888$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2605 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch40740/Area Scan (41x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.241 W/kg

Ch40740/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 11.31 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 0.290 W/kg
SAR(1 g) = 0.149 W/kg; SAR(10 g) = 0.081 W/kg
Smallest distance from peaks to all points 3 dB below = 14.8 mm
Ratio of SAR at M2 to SAR at M1 = 49%
Maximum value of SAR (measured) = 0.232 W/kg

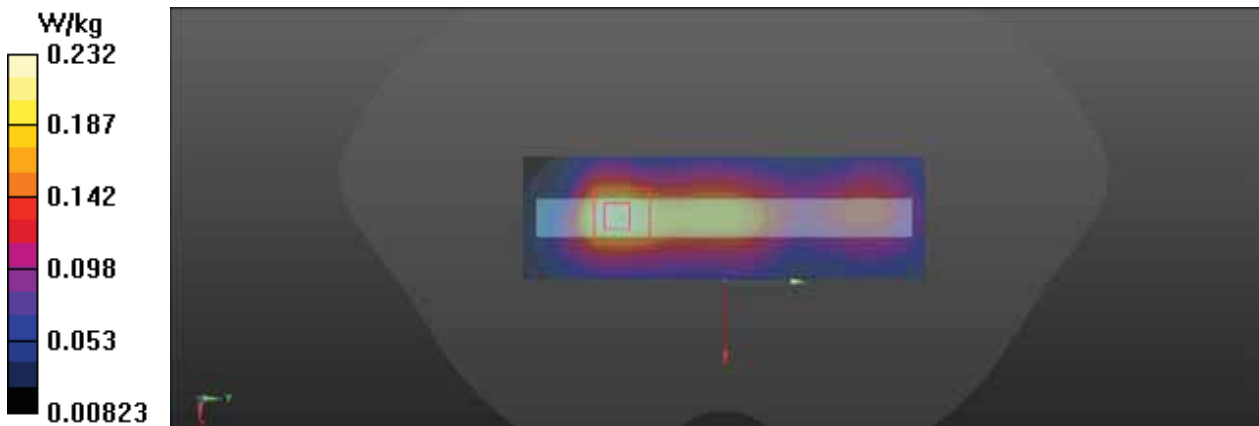

Test Laboratory:BACL.SAR TestingLab

302_LTE TDD Band 41_20M_QPSK_1RB_0Offset_Body Bottom_Ch 40740

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2605 MHz;Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2605$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 40.888$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2605 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch40740/Area Scan (41x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.425 W/kg

Ch40740/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.49 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.494 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.124 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.8%

Maximum value of SAR (measured) = 0.404 W/kg

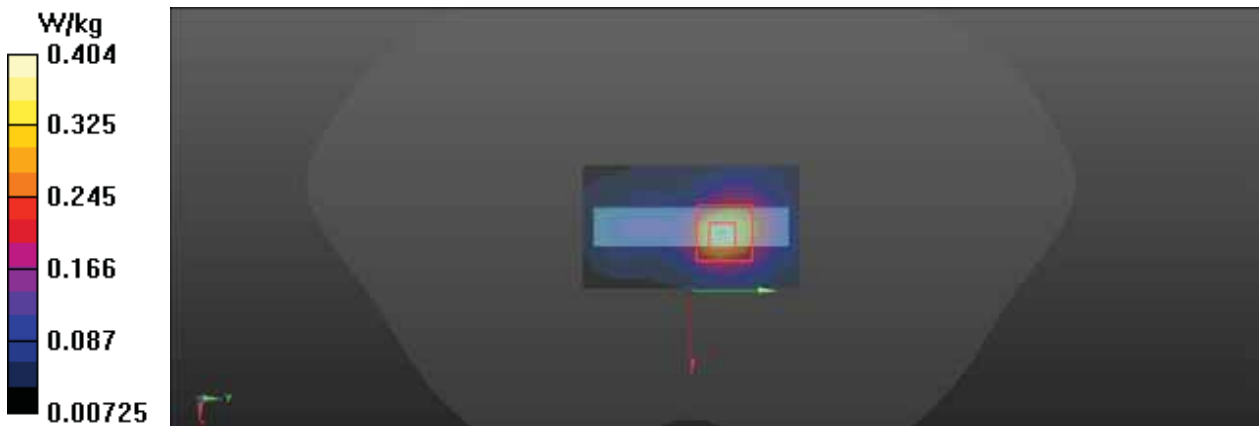

Test Laboratory: BACL SAR Testing Lab

303_LTE TDD Band 41_20M_QPSK_50%RB_0Offset_Body Front_Ch 40740

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2605$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 40.888$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2605 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch40740/Area Scan (81x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.203 W/kg

Ch40740/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.838 V/m; Power Drift = -0.12 dB



Peak SAR (extrapolated) = 0.249 W/kg

SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.063 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 48.8%

Maximum value of SAR (measured) = 0.202 W/kg

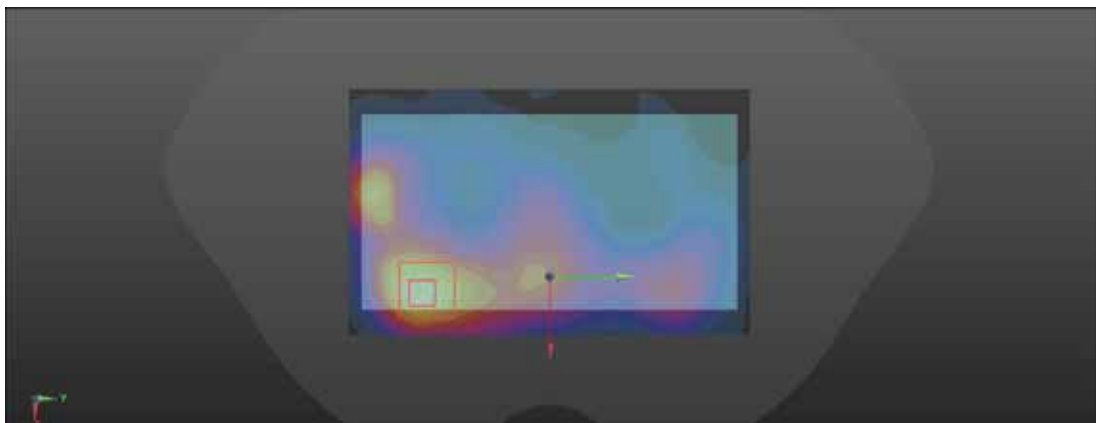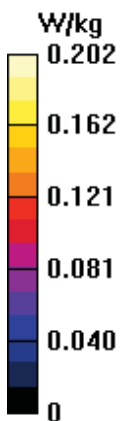

Test Laboratory: BACL SAR Testing Lab

304_LTE TDD Band 41_20M_QPSK_50%RB_0Offset_Body Back_Ch 40740

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2605$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 40.888$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2605 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch40740/Area Scan (81x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.152 W/kg

Ch40740/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 8.652 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.188 W/kg
SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.048 W/kg
Smallest distance from peaks to all points 3 dB below = 15 mm
Ratio of SAR at M2 to SAR at M1 = 46.5%
Maximum value of SAR (measured) = 0.151 W/kg

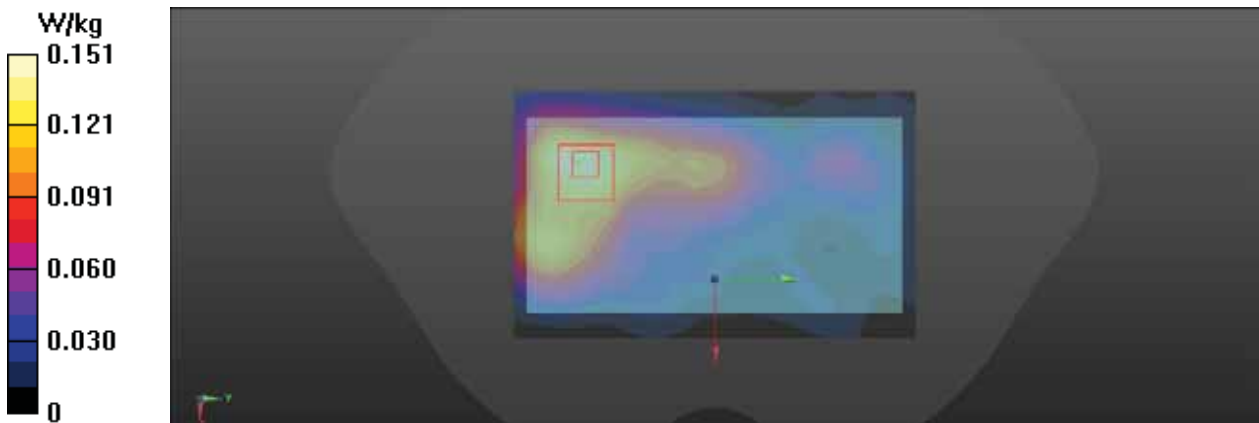

Test Laboratory: BACL SAR Testing Lab

305_LTE TDD Band 41_20M_QPSK_50%RB_0Offset_Body Left_Ch 40740

DUT: T5810

Communication System: UID 0, LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2605$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 40.888$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2605 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch40740/Area Scan (41x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0257 W/kg

Ch40740/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.453 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.0930 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.00672 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 52.3%

Maximum value of SAR (measured) = 0.0302 W/kg

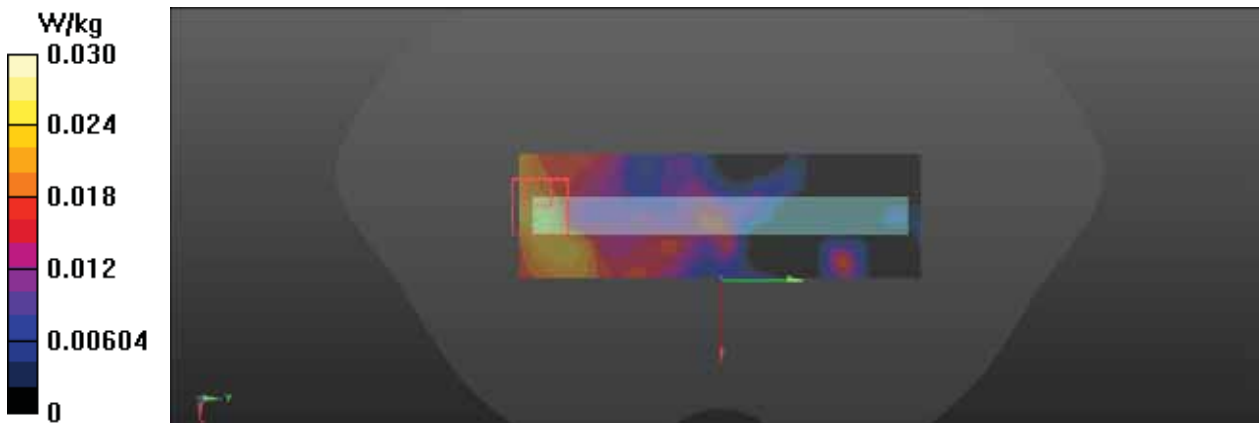

Test Laboratory: BACL SAR Testing Lab

306_LTE TDD Band 41_20M_QPSK_50%RB_0Offset_Body Right_Ch 40740

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2605$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 40.888$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2605 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch40740/Area Scan (41x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.203 W/kg

Ch40740/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 10.39 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.246 W/kg
SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.070 W/kg
Smallest distance from peaks to all points 3 dB below = 15.2 mm
Ratio of SAR at M2 to SAR at M1 = 49.7%
Maximum value of SAR (measured) = 0.196 W/kg

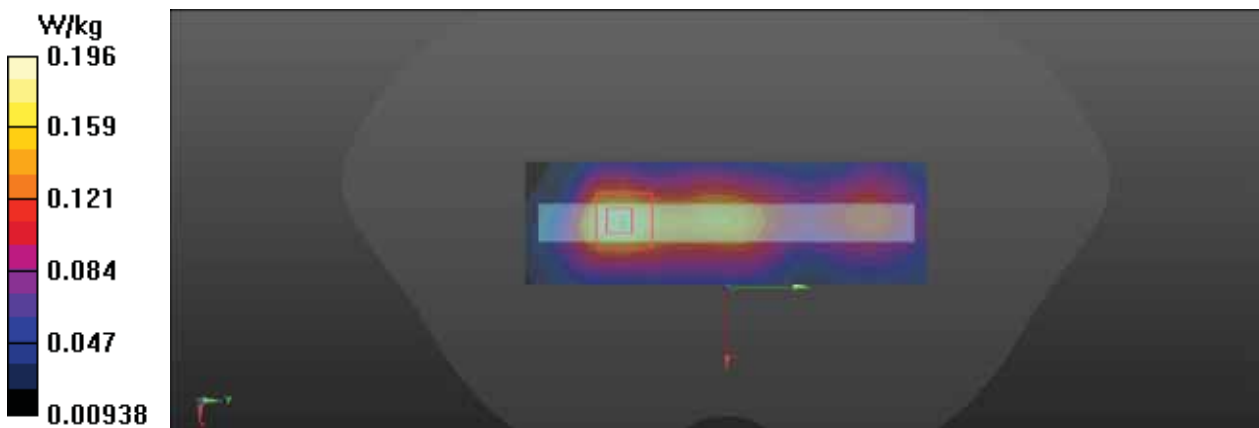

Test Laboratory: BACL SAR Testing Lab

307_LTE TDD Band 41_20M_QPSK_50%RB_0Offset_Body Bottom_Ch 40740

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2605$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 40.888$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2605 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch40740/Area Scan (41x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.367 W/kg

Ch40740/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 13.36 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.435 W/kg
SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.107 W/kg
Smallest distance from peaks to all points 3 dB below = 10.8 mm
Ratio of SAR at M2 to SAR at M1 = 51.3%
Maximum value of SAR (measured) = 0.352 W/kg

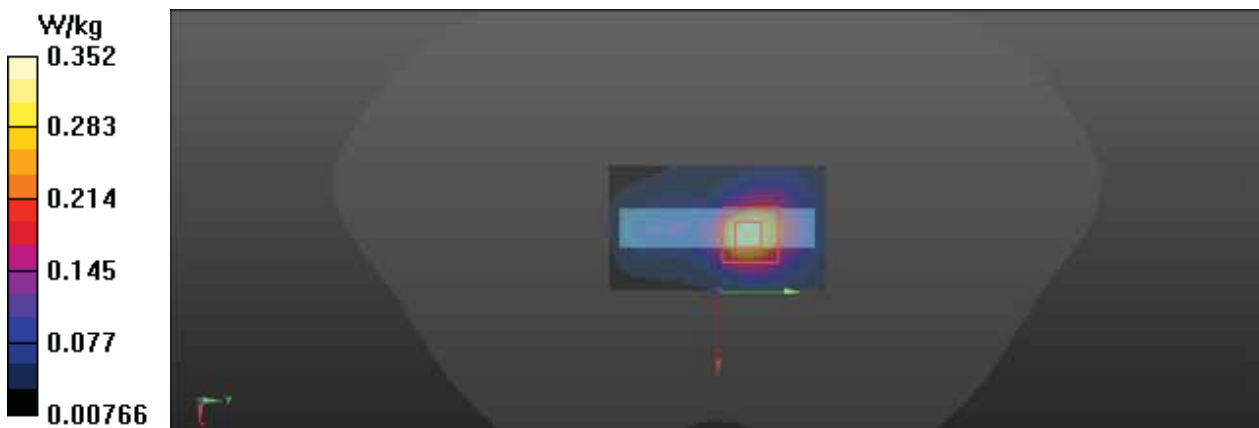

Test Laboratory:BACL.SAR TestingLab

309_LTE TDD Band 41_20M_QPSK_1RB_0Offset_Body Bottom_Ch 40740

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2605 MHz;Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2605$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 40.888$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2605 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch40740/Area Scan (41x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.263 W/kg

Ch40740/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 11.43 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 0.317 W/kg
SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.082 W/kg
Smallest distance from peaks to all points 3 dB below = 12.5 mm
Ratio of SAR at M2 to SAR at M1 = 51%
Maximum value of SAR (measured) = 0.259 W/kg

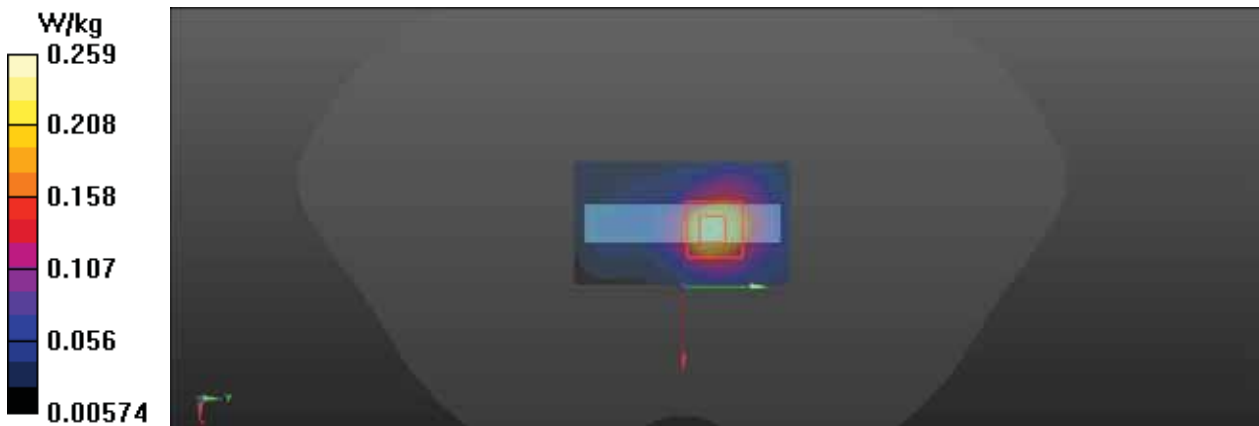

Test Laboratory: BACL SAR Testing Lab

308_LTE TDD Band 41_20M_QPSK_1RB_0Offset_Body Bottom_Ch 40740

DUT: T5810


Communication System: UID 0, LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.5787
Medium: HSL2600 Medium parameters used: $f = 2605$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 40.888$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2605 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch40740/Area Scan (41x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 3.57 W/kg

Ch40740/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 35.61 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 4.36 W/kg
SAR(1 g) = 1.76 W/kg; SAR(10 g) = 0.656 W/kg
Smallest distance from peaks to all points 3 dB below = 6 mm
Ratio of SAR at M2 to SAR at M1 = 42.4%
Maximum value of SAR (measured) = 3.29 W/kg

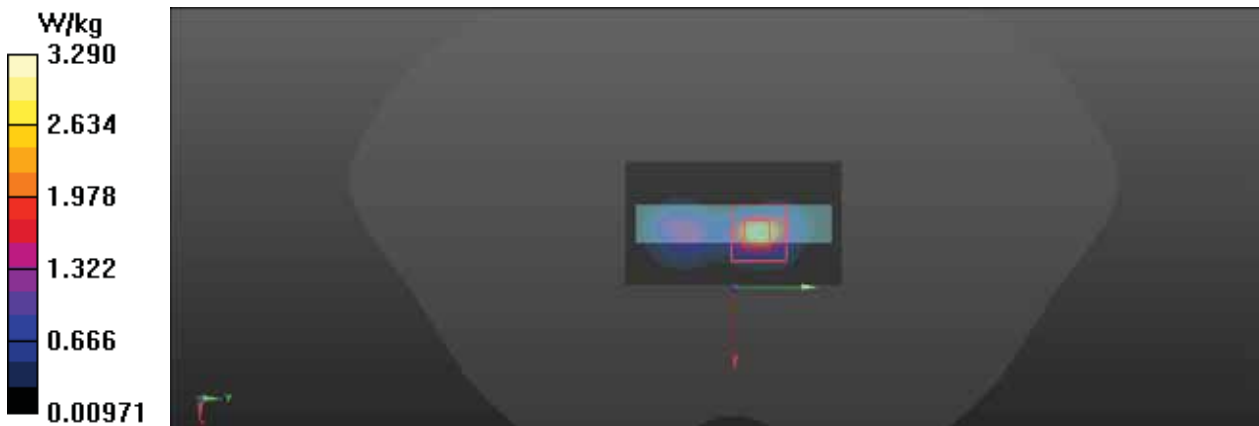

Test Laboratory: BACL SAR Testing Lab

120_WLAN2.4G_802.11b 1Mbps_Left Check_Ch6

DUT: T5810


Communication System: UID 0, WIFI2.4G (0); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: HSL_2450 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 38.305$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2437 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch6/Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.148 W/kg

Ch6/Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.691 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 0.155 W/kg
SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.049 W/kg
Smallest distance from peaks to all points 3 dB below = 8 mm
Ratio of SAR at M2 to SAR at M1 = 53.5%
Maximum value of SAR (measured) = 0.126 W/kg

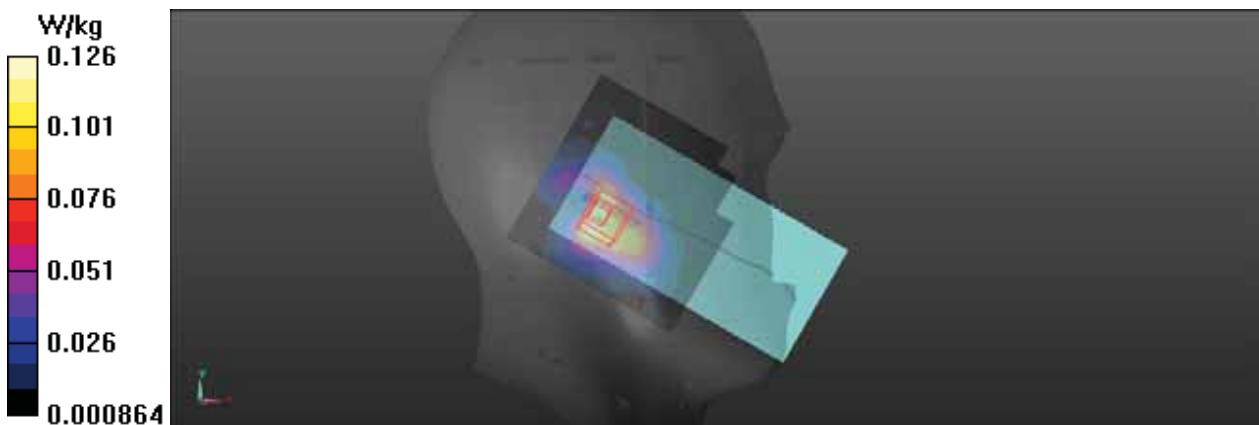

Test Laboratory:BACL.SAR TestingLab

121_WLAN2.4G_802.11b 1Mbps_Left Tilt_Ch6

DUT: T5810



Communication System: UID 0, WIFI2.4G (0); Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: HSL_2450 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 38.305$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2437 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch6/Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0765 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.597 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.0990 W/kg
SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.027 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 52.5%
Maximum value of SAR (measured) = 0.0816 W/kg

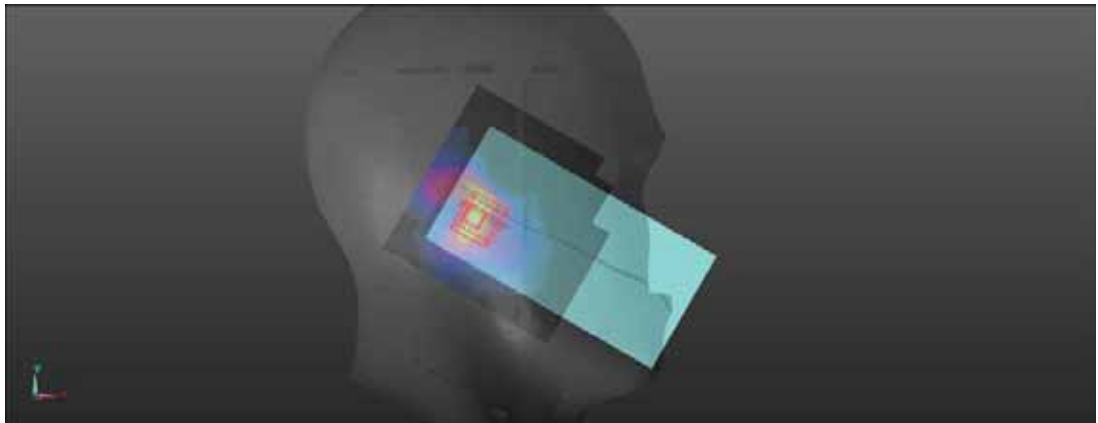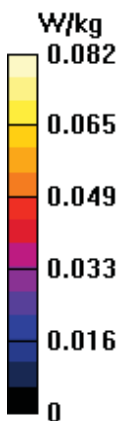

Test Laboratory: BACL SAR Testing Lab

122_WLAN2.4G_802.11b 1Mbps_Right Check_Ch6

DUT: T5810


Communication System: UID 0, WIFI2.4G (0); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: HSL_2450 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 38.305$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2437 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch6/Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.405 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 6.887 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.438 W/kg
SAR(1 g) = 0.256 W/kg; SAR(10 g) = 0.136 W/kg
Smallest distance from peaks to all points 3 dB below = 10.7 mm
Ratio of SAR at M2 to SAR at M1 = 62.6%
Maximum value of SAR (measured) = 0.363 W/kg

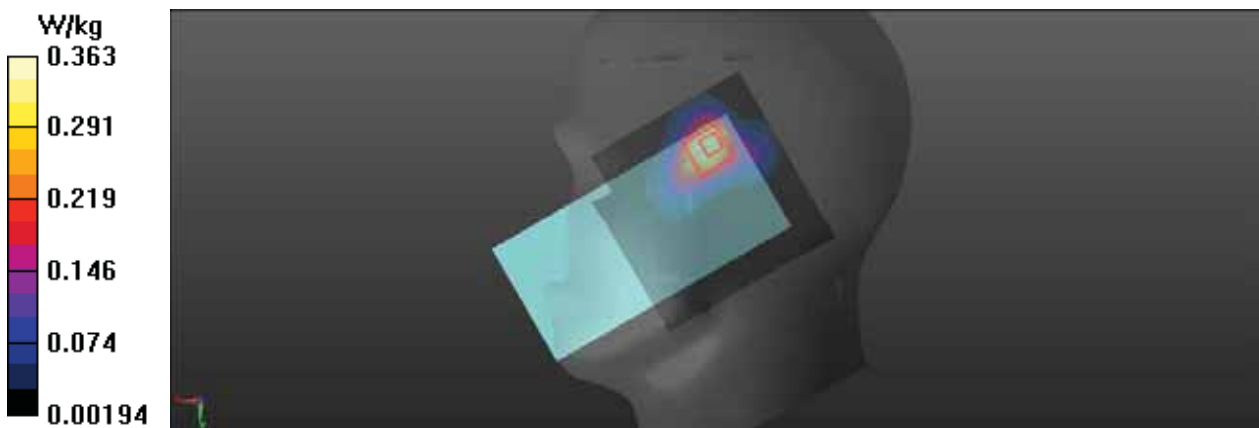

Test Laboratory:BACL.SAR TestingLab

123_WLAN2.4G_802.11b 1Mbps_Right Tilt_Ch6

DUT: T5810


Communication System: UID 0, WIFI2.4G (0); Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: HSL_2450 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 38.305$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2437 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch6/Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.223 W/kg

Ch6/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 6.917 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.275 W/kg
SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.079 W/kg
Smallest distance from peaks to all points 3 dB below = 7.7 mm
Ratio of SAR at M2 to SAR at M1 = 60.8%
Maximum value of SAR (measured) = 0.228 W/kg

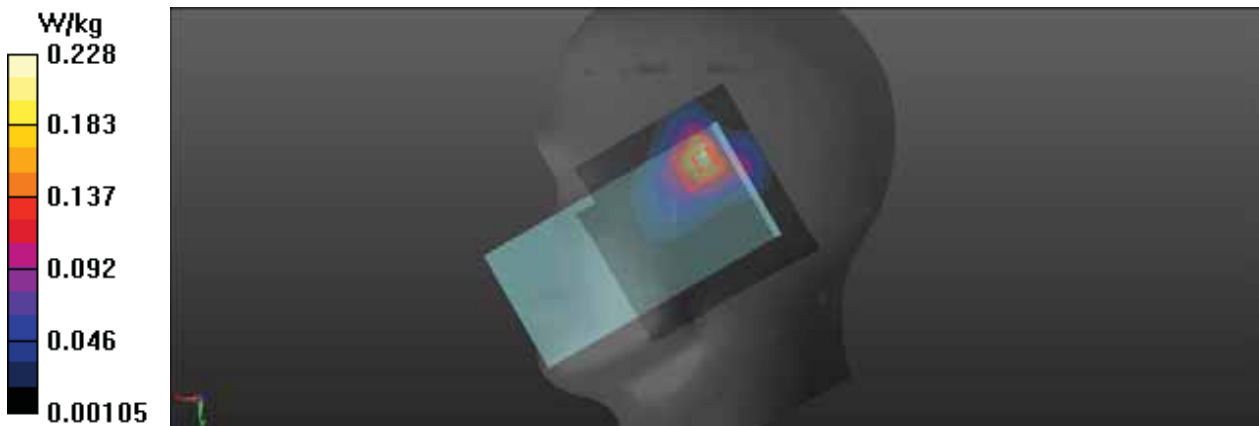

310_WLAN2.4G_802.11b 1Mbps_Body Front_Ch6

DUT: T5810


Communication System: UID 0, WIFI2.4G (0); Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: HSL_2450 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 38.305$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2437 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch6/Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0584 W/kg

Ch6/Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.475 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 0.0690 W/kg
SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.021 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 54.2%
Maximum value of SAR (measured) = 0.0568 W/kg

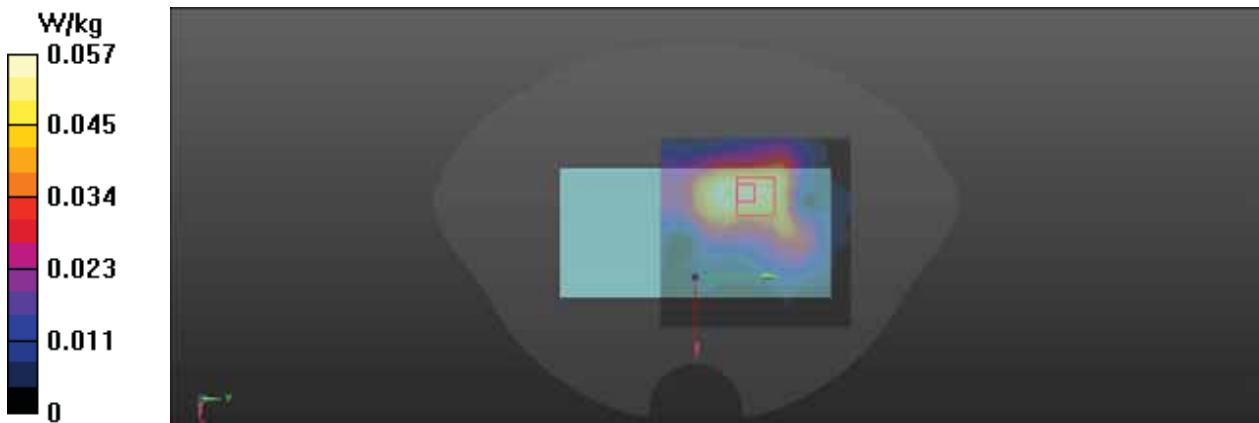

Test Laboratory: BACL SAR Testing Lab

311_WLAN2.4G_802.11b 1Mbps_Body Back_Ch6

DUT: T5810


Communication System: UID 0, WIFI2.4G (0); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: HSL_2450 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 38.305$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2437 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch6/Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.236 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.579 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.284 W/kg
SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.074 W/kg
Smallest distance from peaks to all points 3 dB below = 11.2 mm
Ratio of SAR at M2 to SAR at M1 = 53.2%
Maximum value of SAR (measured) = 0.234 W/kg

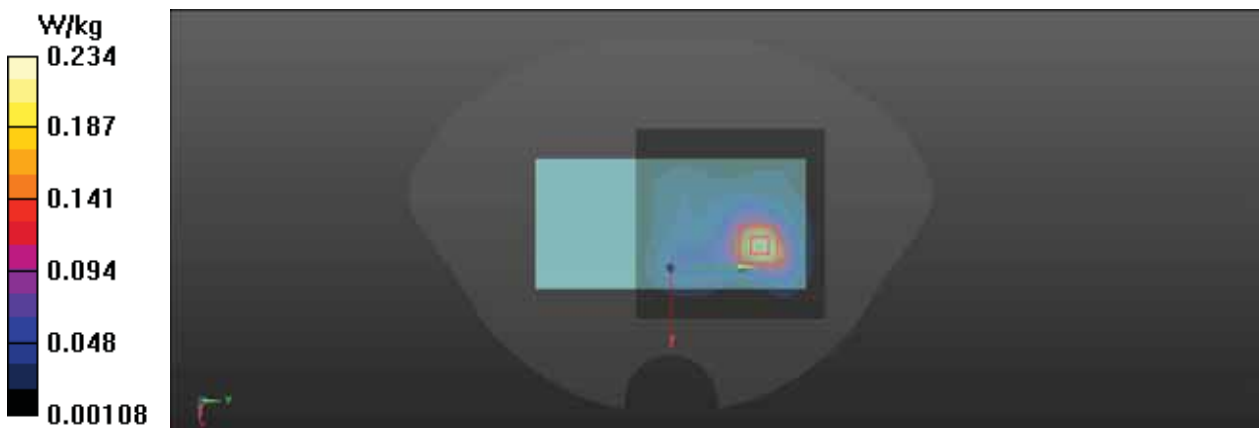

Test Laboratory: BACL SAR Testing Lab

312_WLAN2.4G_802.11b 1Mbps_Body Left_Ch6

DUT: T5810


Communication System: UID 0, WIFI2.4G (0); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: HSL_2450 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 38.305$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2437 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch6/Area Scan (81x31x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0694 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.849 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.0830 W/kg
SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.026 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 54.7%
Maximum value of SAR (measured) = 0.0696 W/kg

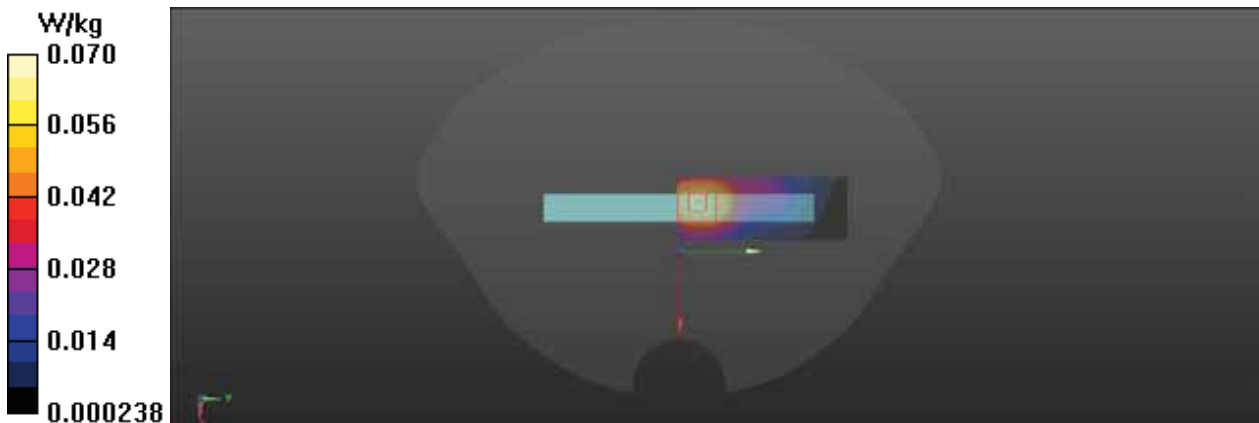

Test Laboratory:BACL.SAR TestingLab

313_WLAN2.4G_802.11b 1Mbps_Body Right_Ch6

DUT: T5810

Communication System: UID 0, WIFI2.4G (0); Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: HSL_2450 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 38.305$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2437 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch6/Area Scan (81x31x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0176 W/kg

Ch6/Zoom Scan (10x11x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.517 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.0150 W/kg

SAR(1 g) = 0.00901 W/kg; SAR(10 g) = 0.00442 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 54.8%

Maximum value of SAR (measured) = 0.0136 W/kg

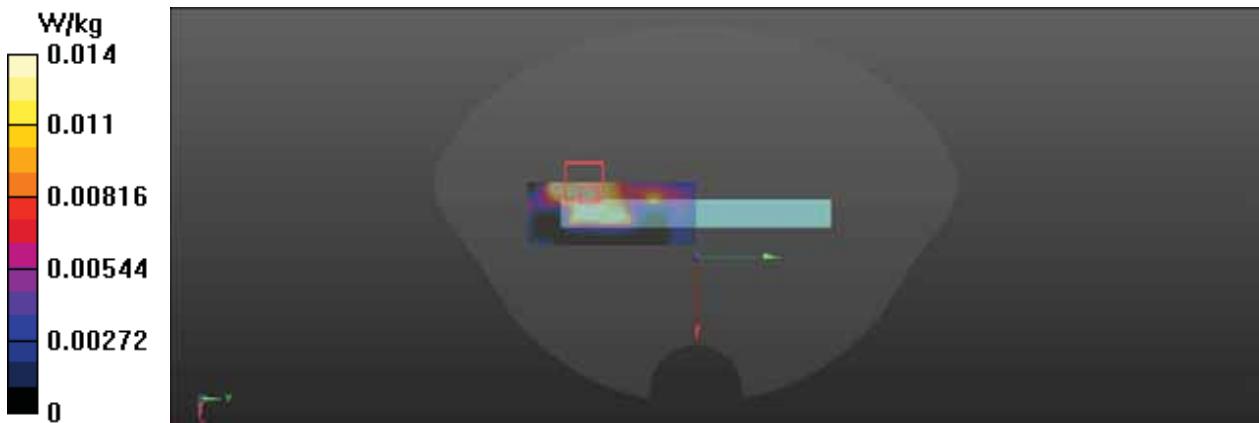

Test Laboratory: BACL SAR Testing Lab

314_WLAN2.4G_802.11b 1Mbps_Body Top_Ch6

DUT: T5810



Communication System: UID 0, WIFI2.4G (0); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: HSL_2450 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 38.305$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2437 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch6/Area Scan (81x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0201 W/kg

Ch6/Zoom Scan (9x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.282 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 0.0250 W/kg
SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.0073 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 48%
Maximum value of SAR (measured) = 0.0205 W/kg

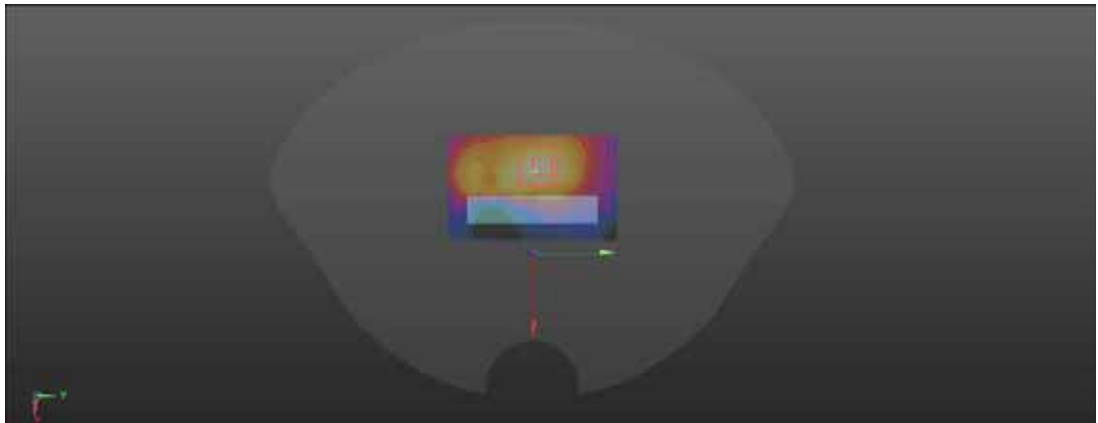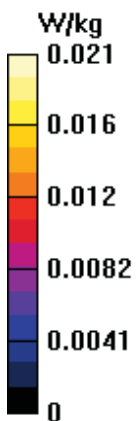

315_WLAN2.4G_802.11b 1Mbps_Body Back_Ch6

DUT: T5810


Communication System: UID 0, WIFI2.4G (0); Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: HSL_2450 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 38.305$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2437 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch6/Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.205 W/kg

Ch6/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.195 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.230 W/kg
SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.073 W/kg
Smallest distance from peaks to all points 3 dB below = 10 mm
Ratio of SAR at M2 to SAR at M1 = 58.5%
Maximum value of SAR (measured) = 0.192 W/kg

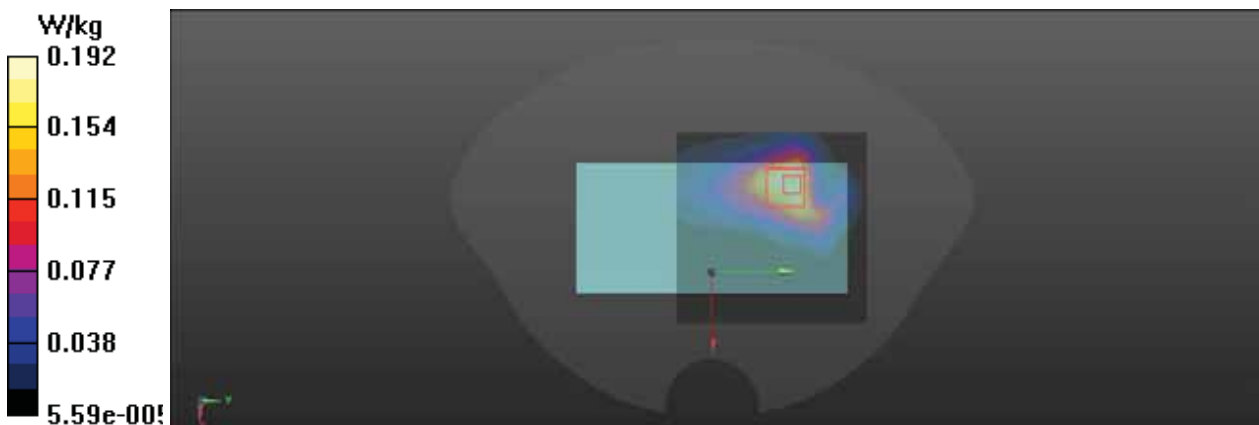

Test Laboratory: BACL SAR Testing Lab

135_BT_1DH5_Left Check_Ch0

DUT: T5810


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.3499
Medium: HSL_2450 Medium parameters used : $f = 2402$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.454$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2402 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch0/Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.00183 W/kg

Ch0/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.00488 W/kg
SAR(1 g) = 0.001 W/kg; SAR(10 g) = 0.000734 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 56.5%
Maximum value of SAR (measured) = 0.00424 W/kg

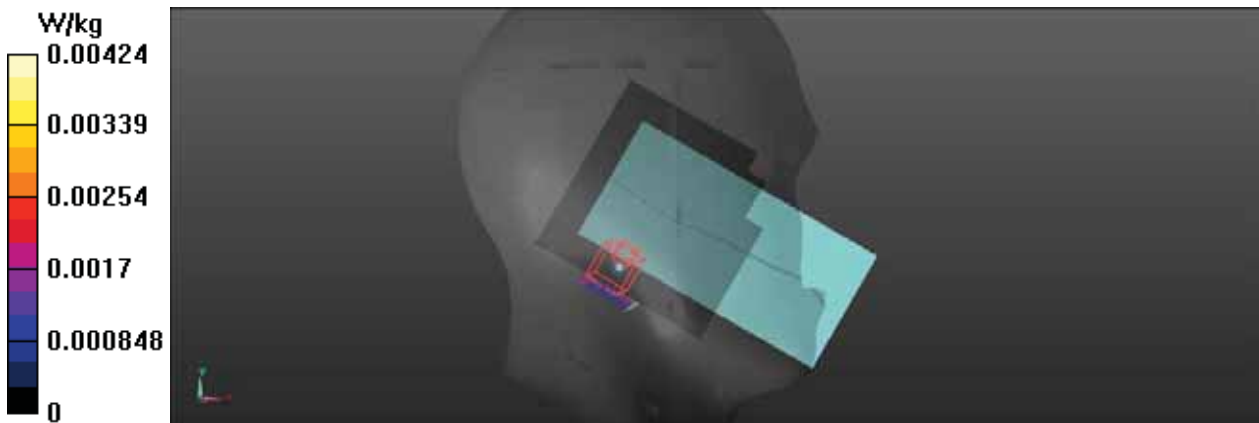

136_BT_1DH5_Left Tilt_Ch0

DUT: T5810


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.3499
Medium: HSL_2450 Medium parameters used : $f = 2402$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.454$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2402 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch0/Area Scan (101x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.00127 W/kg

Ch0/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.5200 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 0.00749 W/kg
SAR(1 g) = 0.00212 W/kg; SAR(10 g) = 0.000973 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 75.4%
Maximum value of SAR (measured) = 0.00286 W/kg

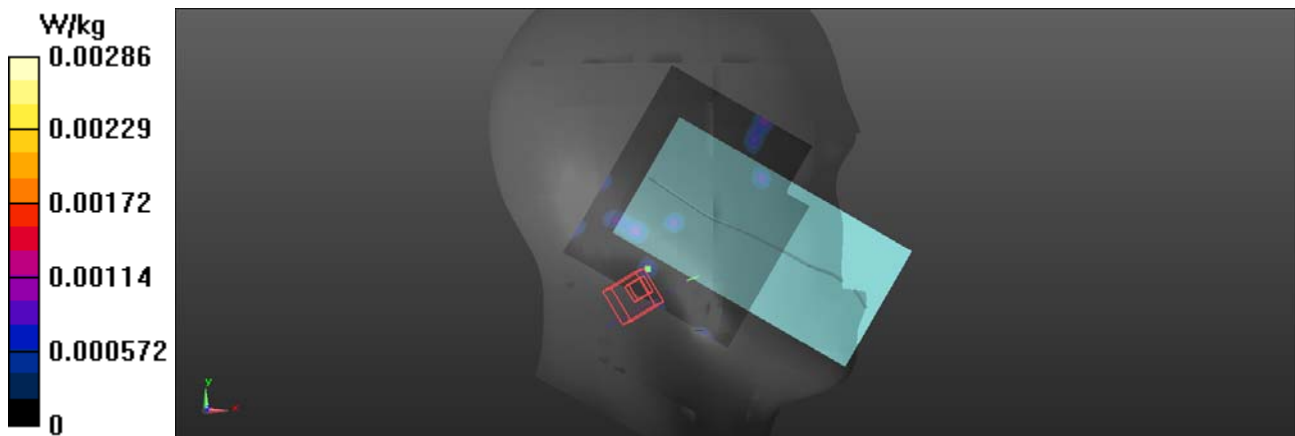

Test Laboratory: BACL SAR Testing Lab

137_BT_1DH5_Right Check_Ch0

DUT: T5810


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.3499
Medium: HSL_2450 Medium parameters used : $f = 2402$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.454$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2402 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch0/Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.00498 W/kg

Ch0/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.5350 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.00834 W/kg
SAR(1 g) = 0.00124 W/kg; SAR(10 g) = 0.000321 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 41.8%
Maximum value of SAR (measured) = 0.00391 W/kg

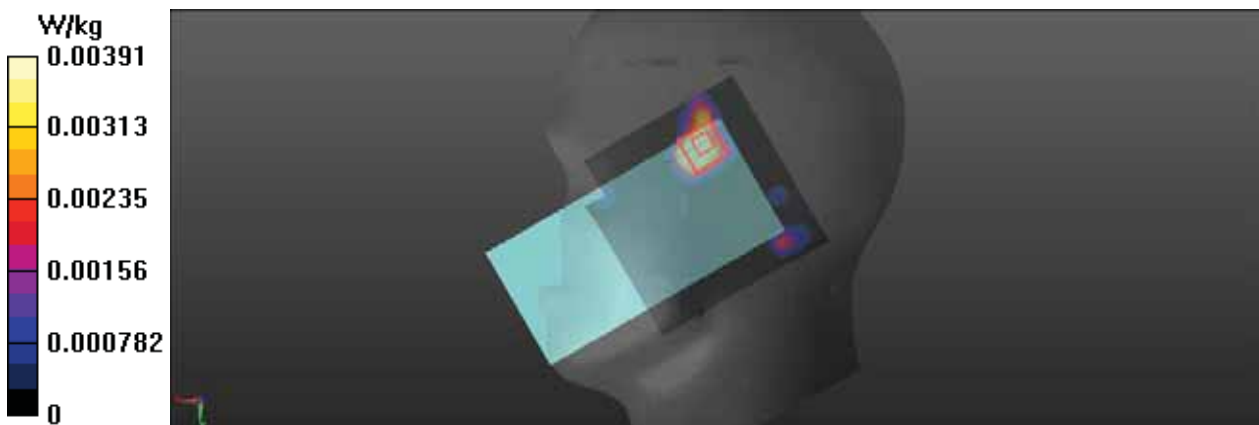

138_BT_1DH5_Right Tilt_Ch0

DUT: T5810


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz;Duty Cycle: 1:1.3499
Medium: HSL_2450 Medium parameters used : $f = 2402$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.454$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2402 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch0/Area Scan (111x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.00446 W/kg

Ch0/Zoom Scan (7x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.107 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.00330 W/kg
SAR(1 g) = 0.002 W/kg; SAR(10 g) = 0.001 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 97.9%
Maximum value of SAR (measured) = 0.00316 W/kg

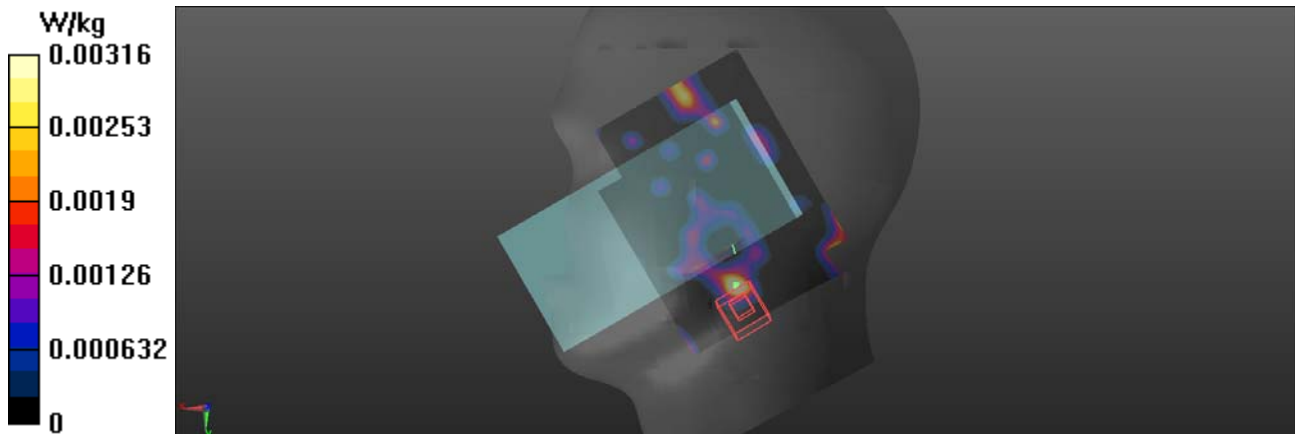

333_BT_1DH5_Body Front_Ch0

DUT: T5810


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz;Duty Cycle: 1:1.3499
Medium: HSL_2450 Medium parameters used : $f = 2402$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.454$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2402 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Fix Surface)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch0/Area Scan (161x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.000723 W/kg

Ch0/Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.5130 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.00393 W/kg
SAR(1 g) = 0.002 W/kg; SAR(10 g) = 0.00111 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 67.5%
Maximum value of SAR (measured) = 0.00301 W/kg

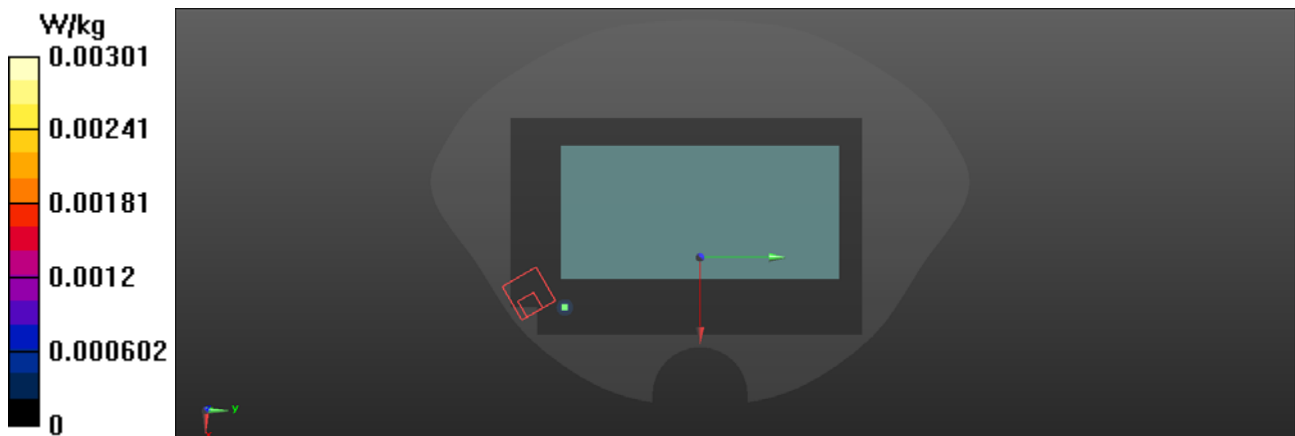

334_BT_1DH5_Body Back_Ch0

DUT: T5810

Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.3499

Medium: HSL_2450 Medium parameters used : $f = 2402$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.454$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2402 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch0/Area Scan (101x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.00467 W/kg

Ch0/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.5690 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.00974 W/kg

SAR(1 g) = 0.00322 W/kg; SAR(10 g) = 0.00127 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 58.3%

Maximum value of SAR (measured) = 0.00502 W/kg

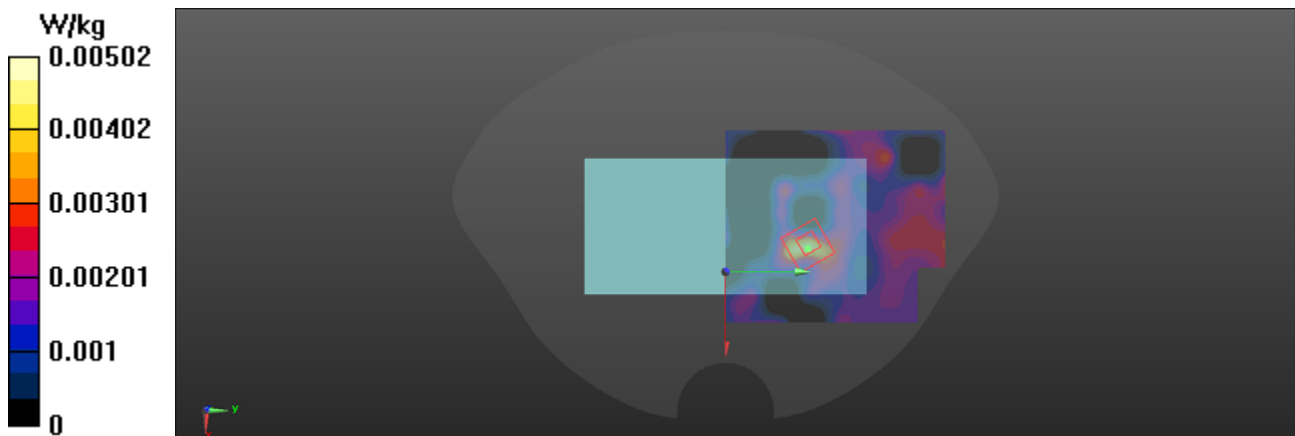

335_BT_1DH5_Body Left_Ch0

DUT: T5810


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.3499
Medium: HSL_2450 Medium parameters used : $f = 2402$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.454$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2402 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch0/Area Scan (91x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.00631 W/kg

Ch0/Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.5740 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.00275 W/kg
SAR(1 g) = 0.00187 W/kg; SAR(10 g) = 0.00115 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 87%
Maximum value of SAR (measured) = 0.00275 W/kg

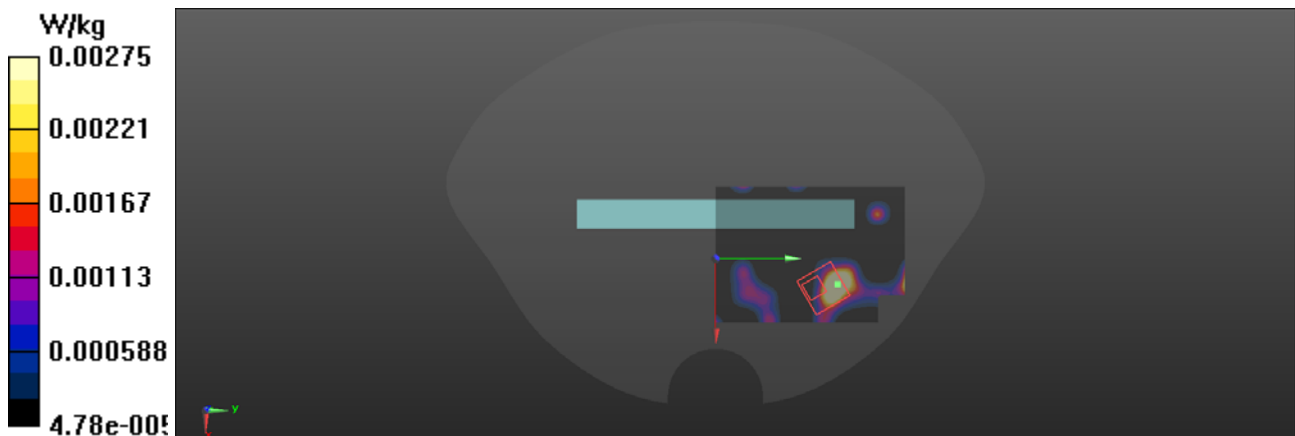

336_BT_1DH5_Body Right_Ch0

DUT: T5810


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz;Duty Cycle: 1:1.3499
Medium: HSL_2450 Medium parameters used : $f = 2402$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.454$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2402 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch0/Area Scan (81x41x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.00219 W/kg

Ch0/Zoom Scan (8x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.4725 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 0.00925 W/kg
SAR(1 g) = 0.00213 W/kg; SAR(10 g) = 0.000909 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 65.7%
Maximum value of SAR (measured) = 0.00334 W/kg

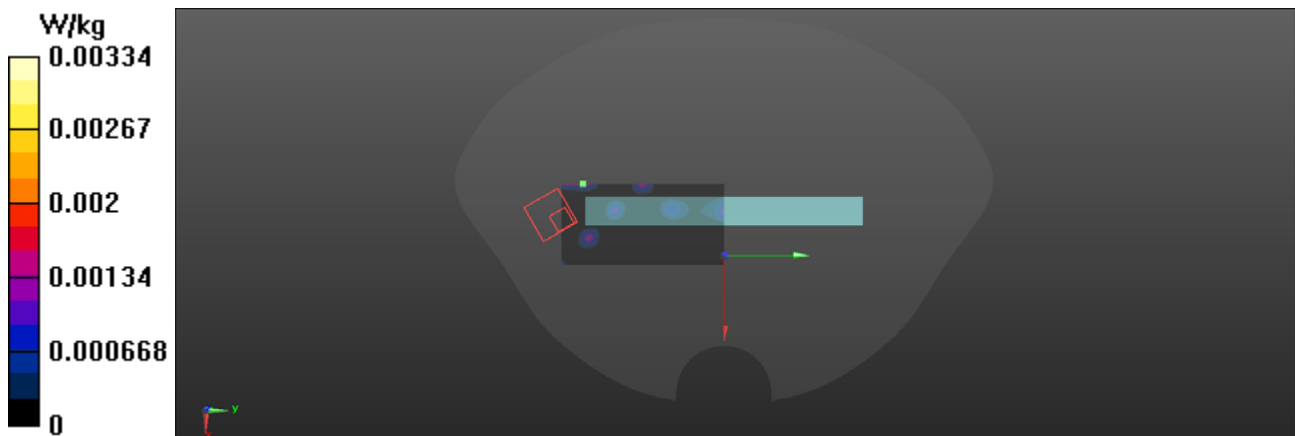

337_BT_1DH5_Body_Top_Ch0

DUT: T5810


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.3499
Medium: HSL_2450 Medium parameters used : $f = 2402$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.454$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2402 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch0/Area Scan (101x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.00280 W/kg

Ch0/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.9110 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.00619 W/kg
SAR(1 g) = 0.00135 W/kg; SAR(10 g) = 0.000439 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 67.6%
Maximum value of SAR (measured) = 0.00210 W/kg

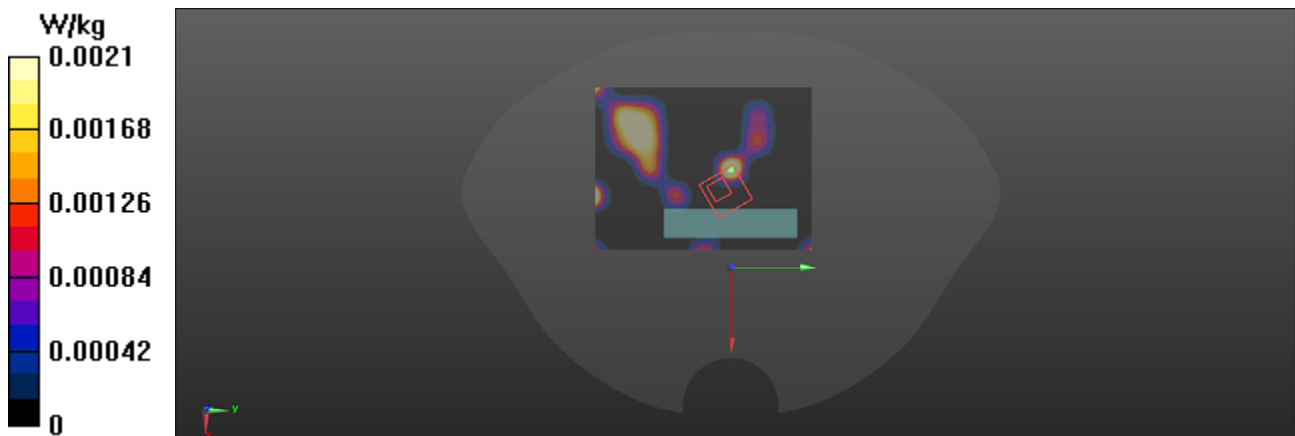

Test Laboratory: BACL SAR Testing Lab

338_BT_1DH5_Body Left_Ch0

DUT: T5810


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.3499
Medium: HSL_2450 Medium parameters used : $f = 2402$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.454$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2402 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch0/Area Scan (91x31x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.00361 W/kg

Ch0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.139 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 0.00405 W/kg
SAR(1 g) = 0.00126 W/kg; SAR(10 g) = 0.0005 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 41.1%
Maximum value of SAR (measured) = 0.00316 W/kg

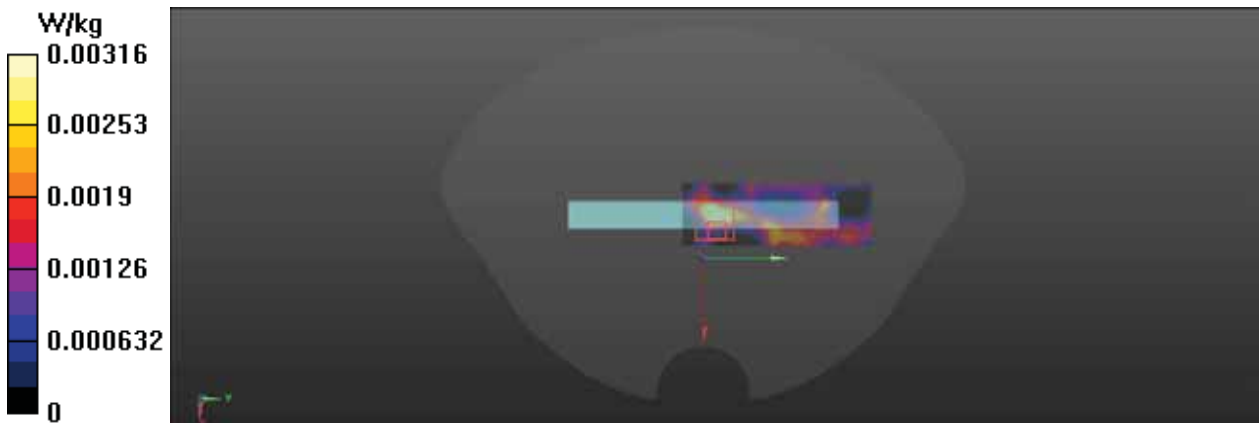

Test Laboratory:BACL.SAR TestingLab

125_WLAN5G_802.11a 6Mbps_Left Check_Ch40

DUT: T5810


Communication System: UID 0, WIFI 5G (0); Frequency: 5200 MHz;Duty Cycle: 1:1
Medium: HSL_5000 Medium parameters used: $f = 5200$ MHz; $\sigma = 4.561$ S/m; $\epsilon_r = 35.919$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.8, 4.8, 4.8) @ 5200 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch40/Area Scan (101x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.52 W/kg

Ch40/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 8.620 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.99 W/kg
SAR(1 g) = 0.670 W/kg; SAR(10 g) = 0.230 W/kg
Smallest distance from peaks to all points 3 dB below = 9.2 mm
Ratio of SAR at M2 to SAR at M1 = 71.9%
Maximum value of SAR (measured) = 1.44 W/kg

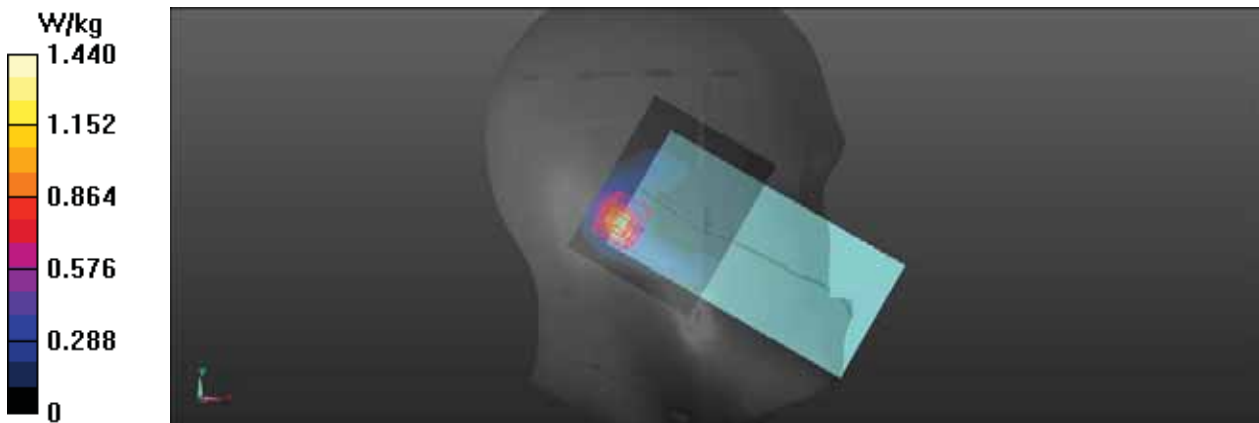

Test Laboratory: BACL SAR Testing Lab

126_WLAN5G_802.11a 6Mbps_Left Tilt_Ch40

DUT: T5810



Communication System: UID 0, WIFI 5G (0); Frequency: 5200 MHz; Duty Cycle: 1:1
Medium: HSL_5000 Medium parameters used: $f = 5200$ MHz; $\sigma = 4.561$ S/m; $\epsilon_r = 35.919$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.8, 4.8, 4.8) @ 5200 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch40/Area Scan (101x81x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 1.46 W/kg

Ch40/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm
Reference Value = 7.899 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 1.88 W/kg
SAR(1 g) = 0.645 W/kg; SAR(10 g) = 0.224 W/kg
Smallest distance from peaks to all points 3 dB below = 9.2 mm
Ratio of SAR at M2 to SAR at M1 = 72.4%
Maximum value of SAR (measured) = 1.36 W/kg

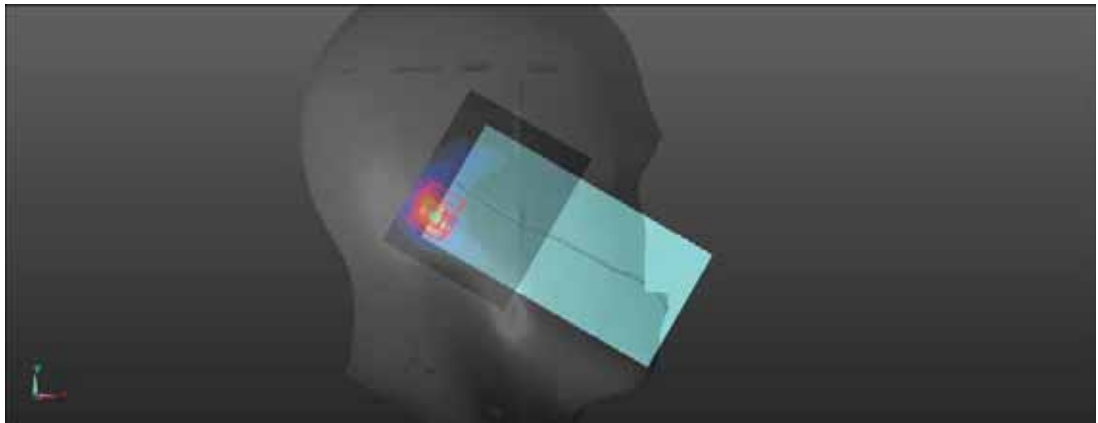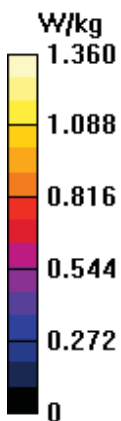

Test Laboratory:BACL.SAR TestingLab

127_WLAN5G_802.11a 6Mbps_Right Check_Ch40

DUT: T5810



Communication System: UID 0, WIFI 5G (0); Frequency: 5200 MHz;Duty Cycle: 1:1
Medium: HSL_5000 Medium parameters used: $f = 5200$ MHz; $\sigma = 4.561$ S/m; $\epsilon_r = 35.919$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.8, 4.8, 4.8) @ 5200 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch40/Area Scan (101x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.60 W/kg

Ch40/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 6.730 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 2.45 W/kg
SAR(1 g) = 0.711 W/kg; SAR(10 g) = 0.239 W/kg
Smallest distance from peaks to all points 3 dB below = 8 mm
Ratio of SAR at M2 to SAR at M1 = 69.8%
Maximum value of SAR (measured) = 1.56 W/kg

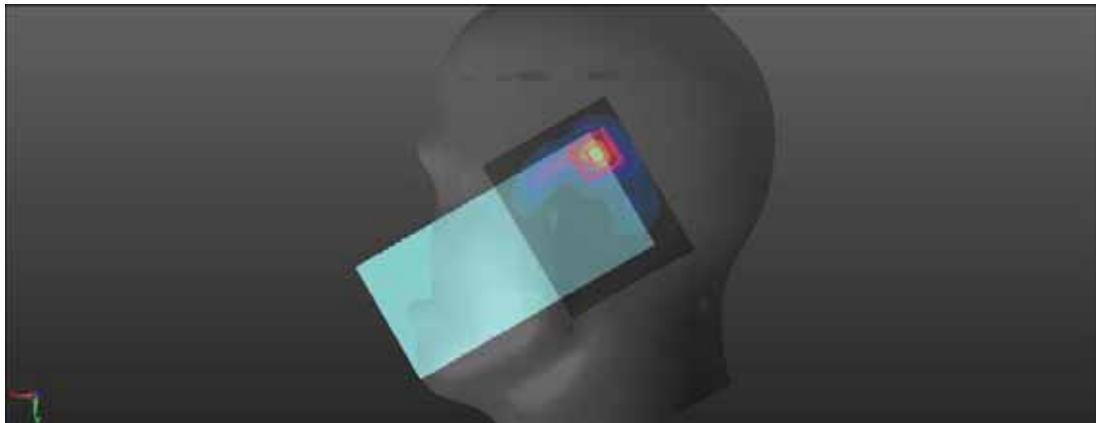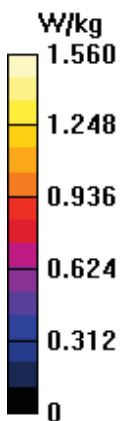

Test Laboratory:BACL.SAR TestingLab

128_WLAN5G_802.11a 6Mbps_Right Tilt_Ch40

DUT: T5810



Communication System: UID 0, WIFI 5G (0); Frequency: 5200 MHz;Duty Cycle: 1:1
Medium: HSL_5000 Medium parameters used: $f = 5200$ MHz; $\sigma = 4.561$ S/m; $\epsilon_r = 35.919$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.8, 4.8, 4.8) @ 5200 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch40/Area Scan (101x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.34 W/kg

Ch40/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 6.690 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 2.14 W/kg
SAR(1 g) = 0.630 W/kg; SAR(10 g) = 0.204 W/kg
Smallest distance from peaks to all points 3 dB below = 8.2 mm
Ratio of SAR at M2 to SAR at M1 = 69.8%
Maximum value of SAR (measured) = 1.42 W/kg

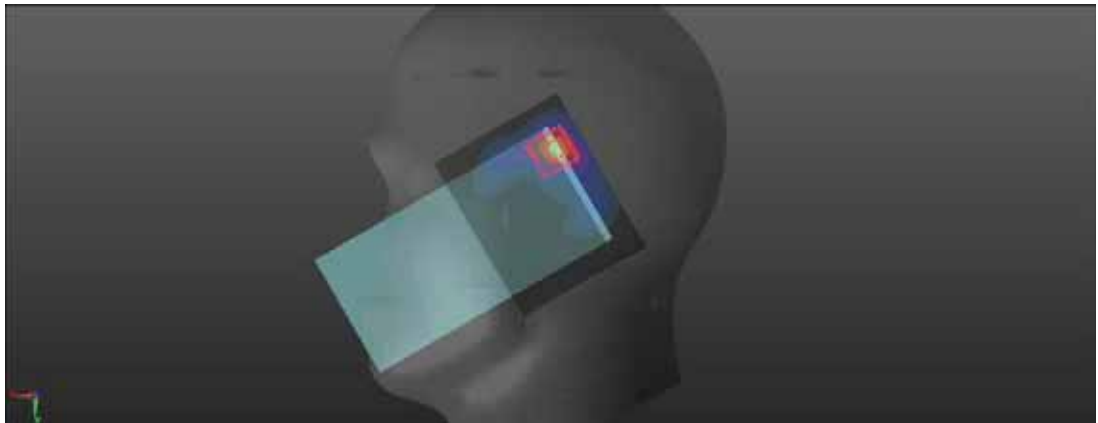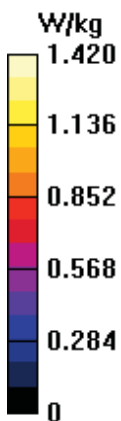

317_WLAN5G_802.11a 6Mbps_Body Front_Ch40

DUT: T5810


Communication System: UID 0, WIFI 5G (0); Frequency: 5200 MHz;Duty Cycle: 1:1
Medium: HSL_5000 Medium parameters used: $f = 5200$ MHz; $\sigma = 4.561$ S/m; $\epsilon_r = 35.919$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.8, 4.8, 4.8) @ 5200 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch6/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.308 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 1.967 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.486 W/kg
SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.063 W/kg
Smallest distance from peaks to all points 3 dB below = 12 mm
Ratio of SAR at M2 to SAR at M1 = 69%
Maximum value of SAR (measured) = 0.335 W/kg

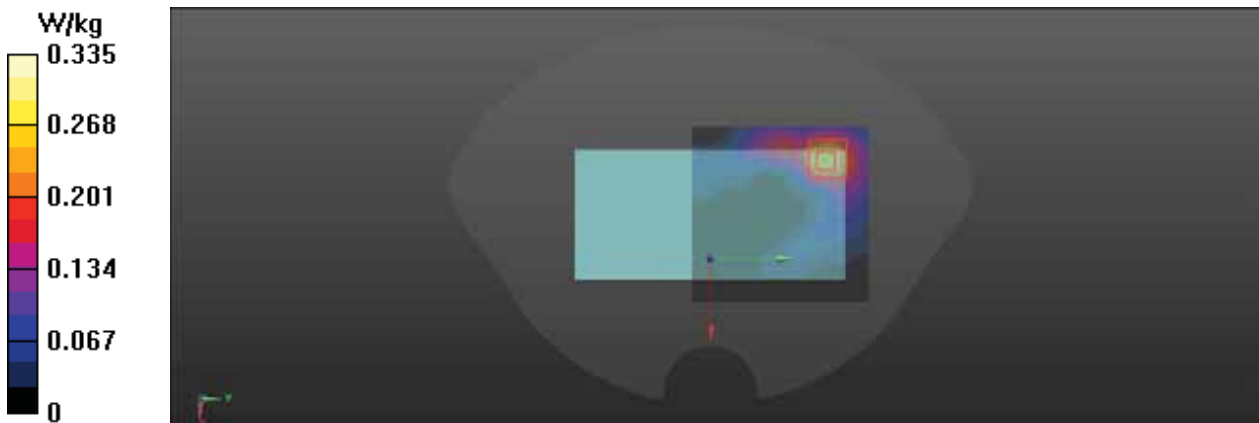

Test Laboratory: BACL SAR Testing Lab

318_WLAN5G_802.11a 6Mbps_Body Back_Ch40

DUT: T5810


Communication System: UID 0, WIFI 5G (0); Frequency: 5200 MHz; Duty Cycle: 1:1
Medium: HSL_5000 Medium parameters used: $f = 5200$ MHz; $\sigma = 4.561$ S/m; $\epsilon_r = 35.919$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.8, 4.8, 4.8) @ 5200 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch40/Area Scan (101x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.944 W/kg

Ch40/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm
Reference Value = 0.6600 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 1.32 W/kg
SAR(1 g) = 0.439 W/kg; SAR(10 g) = 0.169 W/kg
Smallest distance from peaks to all points 3 dB below = 11.2 mm
Ratio of SAR at M2 to SAR at M1 = 69.8%
Maximum value of SAR (measured) = 0.917 W/kg

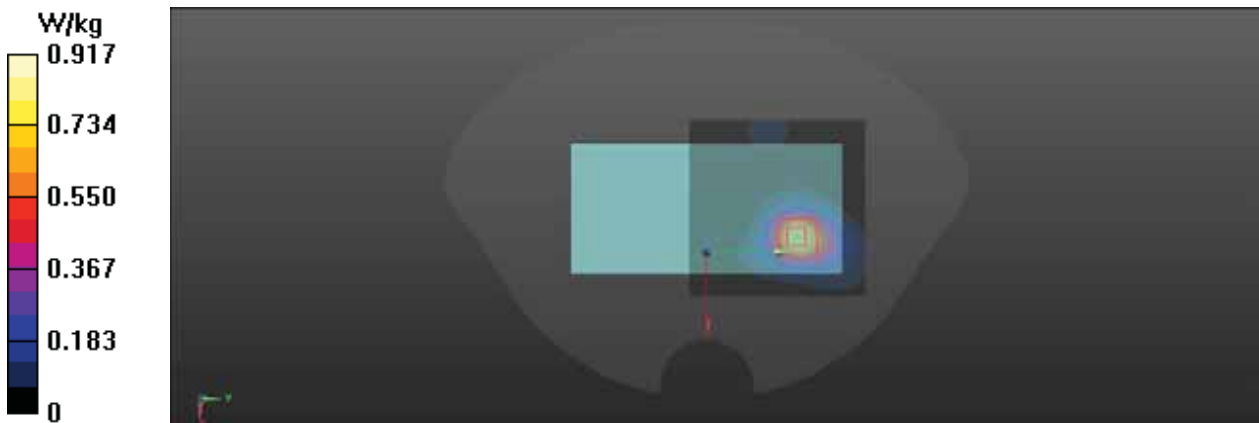

319_WLAN5G_802.11a 6Mbps_Body Left_Ch40

DUT: T5810



Communication System: UID 0, WIFI 5G (0); Frequency: 5200 MHz;Duty Cycle: 1:1
Medium: HSL_5000 Medium parameters used: $f = 5200$ MHz; $\sigma = 4.561$ S/m; $\epsilon_r = 35.919$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.8, 4.8, 4.8) @ 5200 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch40/Area Scan (101x51x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.230 W/kg

Ch40/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 2.233 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 0.366 W/kg
SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.053 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 68.5%
Maximum value of SAR (measured) = 0.247 W/kg

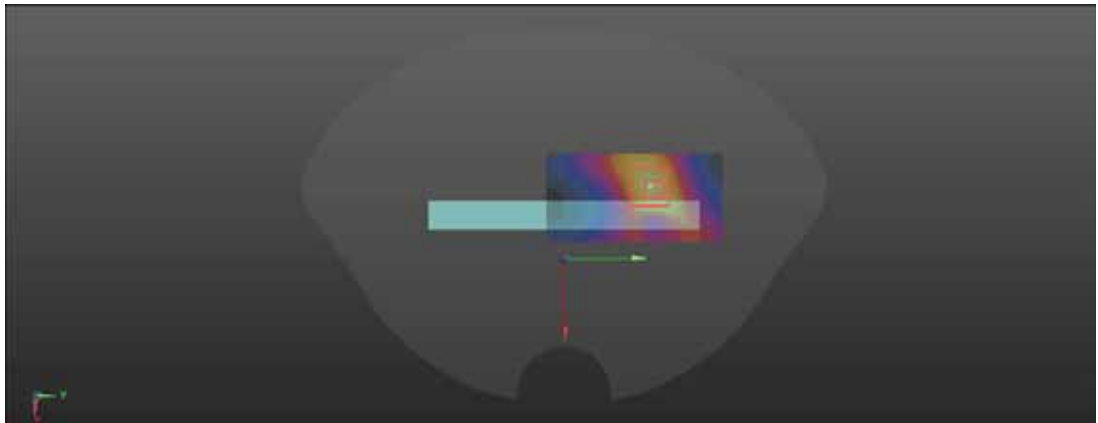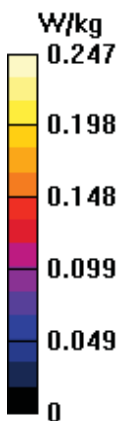

Test Laboratory:BACL.SAR TestingLab

320_WLAN5G_802.11a 6Mbps_Body Right_Ch40

DUT: T5810



Communication System: UID 0, WIFI 5G (0); Frequency: 5200 MHz;Duty Cycle: 1:1
Medium: HSL_5000 Medium parameters used: $f = 5200$ MHz; $\sigma = 4.561$ S/m; $\epsilon_r = 35.919$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.8, 4.8, 4.8) @ 5200 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch40/Area Scan (101x51x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.175 W/kg

Ch40/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.252 W/kg
SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.034 W/kg
Smallest distance from peaks to all points 3 dB below = 11.9 mm
Ratio of SAR at M2 to SAR at M1 = 68.8%
Maximum value of SAR (measured) = 0.173 W/kg

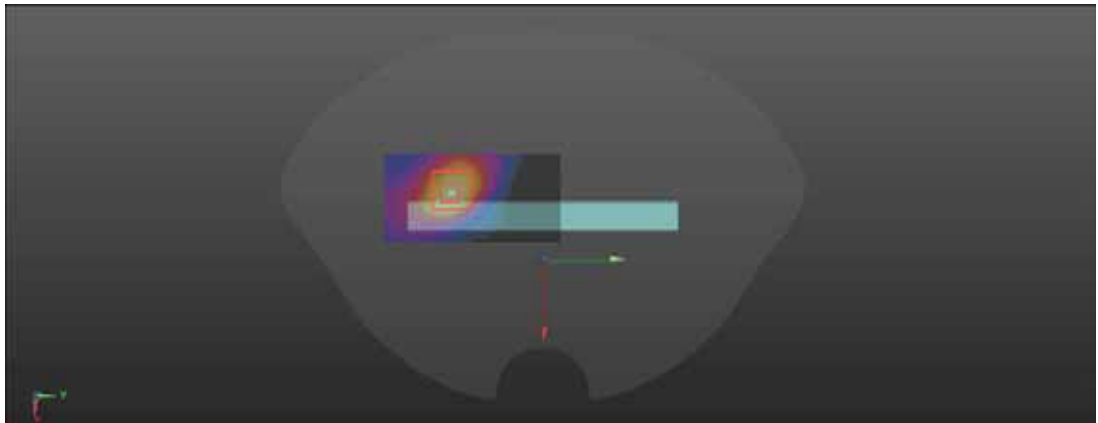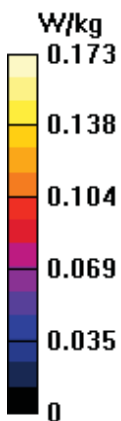

Test Laboratory: BACL SAR Testing Lab

321_WLAN5G_802.11a 6Mbps_Body Top_Ch40

DUT: T5810



Communication System: UID 0, WIFI 5G (0); Frequency: 5200 MHz; Duty Cycle: 1:1
Medium: HSL_5000 Medium parameters used: $f = 5200$ MHz; $\sigma = 4.561$ S/m; $\epsilon_r = 35.919$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.8, 4.8, 4.8) @ 5200 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch40/Area Scan (91x41x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.773 W/kg

Ch40/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 7.339 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.15 W/kg
SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.130 W/kg
Smallest distance from peaks to all points 3 dB below = 9.7 mm
Ratio of SAR at M2 to SAR at M1 = 68%
Maximum value of SAR (measured) = 0.772 W/kg

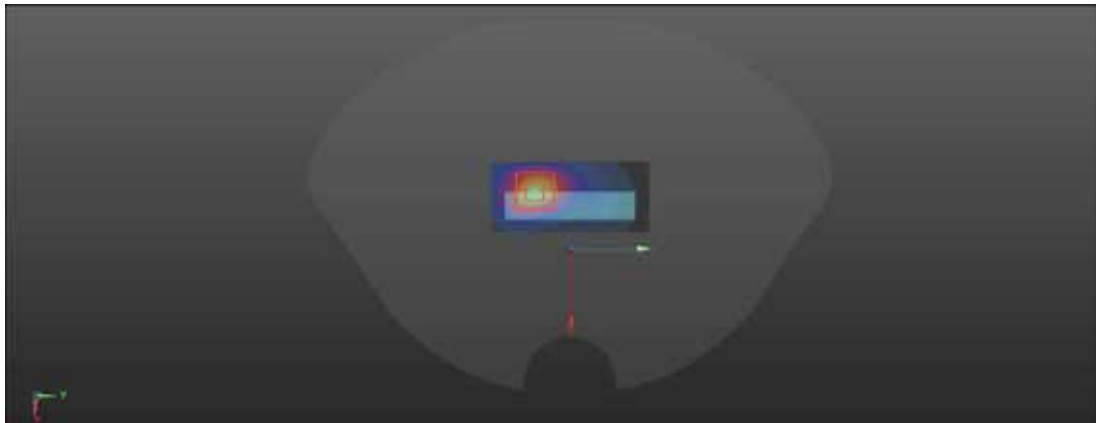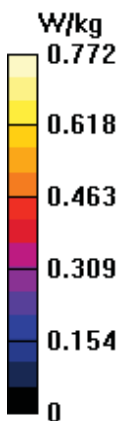

Test Laboratory:BACL.SAR TestingLab

322_WLAN5G_802.11a 6Mbps_Body Back_Ch40

DUT: T5810


Communication System: UID 0, WIFI 5G (0); Frequency: 5200 MHz;Duty Cycle: 1:1
Medium: HSL_5000 Medium parameters used: $f = 5200$ MHz; $\sigma = 4.561$ S/m; $\epsilon_r = 35.919$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.8, 4.8, 4.8) @ 5200 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch40/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 4.43 W/kg

Ch40/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0.5220 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 5.85 W/kg
SAR(1 g) = 1.97 W/kg; SAR(10 g) = 0.619 W/kg
Smallest distance from peaks to all points 3 dB below = 7.4 mm
Ratio of SAR at M2 to SAR at M1 = 73%
Maximum value of SAR (measured) = 4.13 W/kg

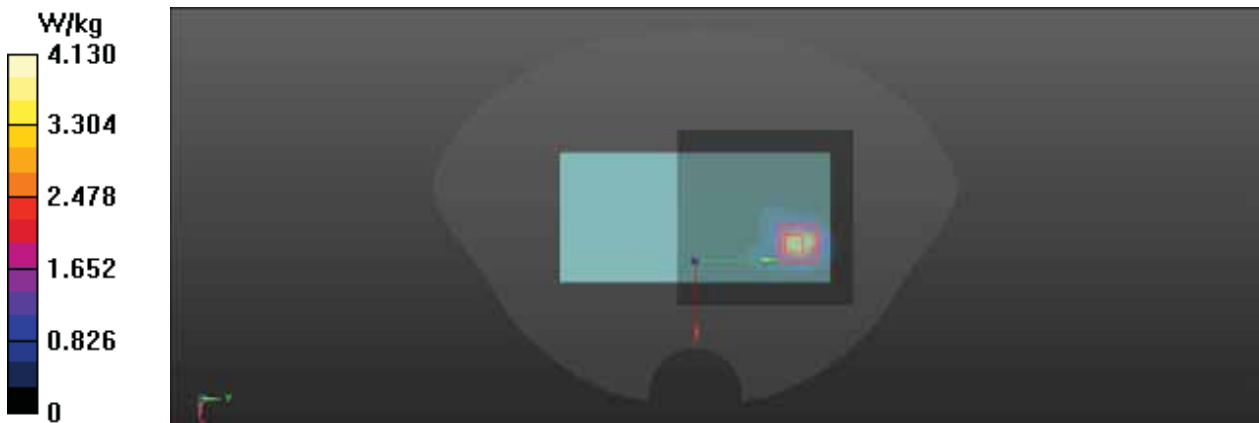

130_WLAN5G_802.11a 6Mbps_Left Check_Ch157

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5785 MHz;Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 34.23$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.39, 4.39, 4.39) @ 5785 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch157/Area Scan (101x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.833 W/kg

Ch157/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.22 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.490 W/kg

SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.041 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 66.9%

Maximum value of SAR (measured) = 0.331 W/kg

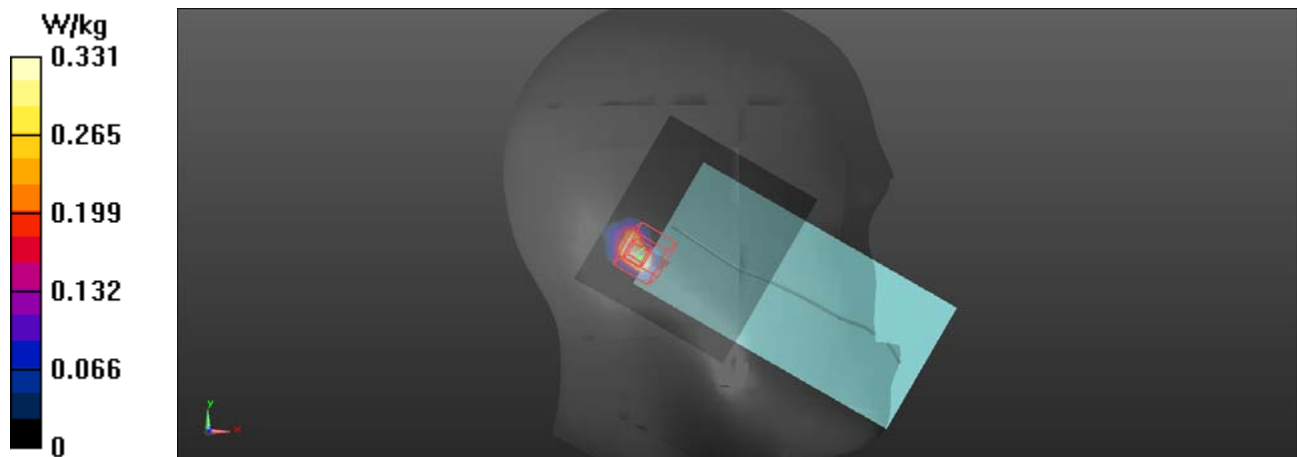

131_WLAN5G_802.11a 6Mbps_Left Tilt_Ch157

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 34.23$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.39, 4.39, 4.39) @ 5785 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch157/Area Scan (101x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.864 W/kg

Ch157/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.522 V/m; Power Drift = 0.01 dB



Peak SAR (extrapolated) = 0.586 W/kg

SAR(1 g) = 0.173 W/kg; SAR(10 g) = 0.053 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 67.1%

Maximum value of SAR (measured) = 0.389 W/kg

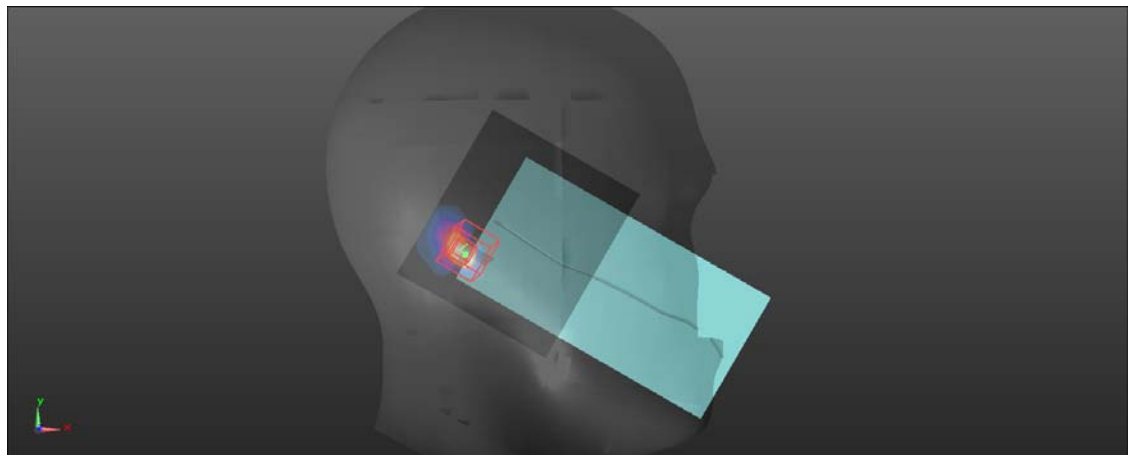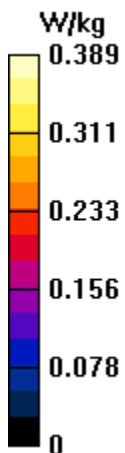

132_WLAN5G_802.11a 6Mbps_Right Check_Ch157

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5785 MHz;Duty Cycle: 1:1


Medium: HSL_5000 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 34.23$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.39, 4.39, 4.39) @ 5785 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch157/Area Scan (101x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.643 W/kg

Ch157/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0.731 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.442 W/kg
SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.025 W/kg
Smallest distance from peaks to all points 3 dB below = 6.4 mm
Ratio of SAR at M2 to SAR at M1 = 63.8%
Maximum value of SAR (measured) = 0.268 W/kg

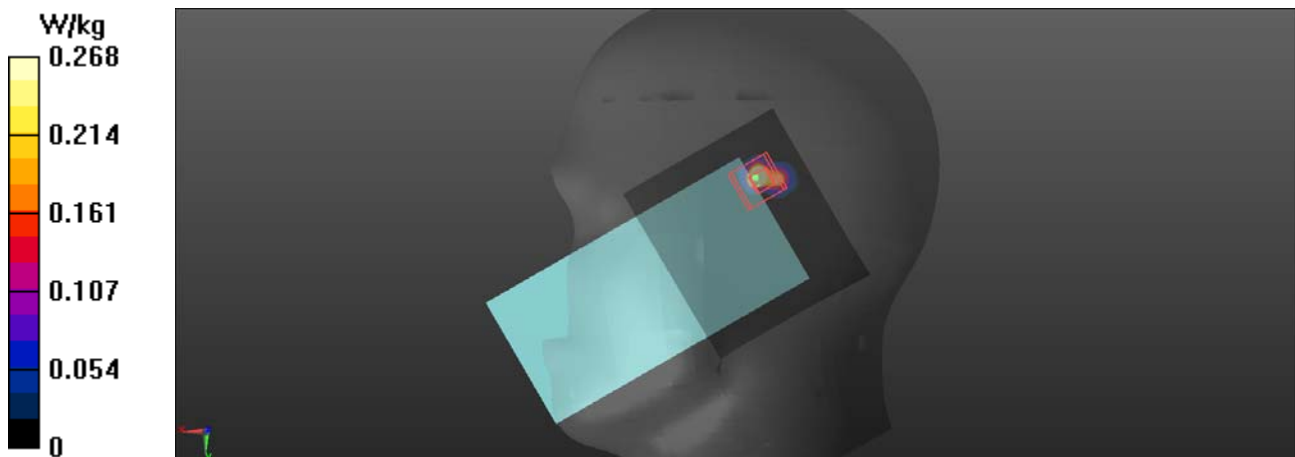

133_WLAN5G_802.11a 6Mbps_Right Tilt_Ch157

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 34.23$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.39, 4.39, 4.39) @ 5785 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch157/Area Scan (101x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.392 W/kg

Ch157/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.7820 V/m; Power Drift = -0.02 dB



Peak SAR (extrapolated) = 0.495 W/kg

SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.029 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 66.7%

Maximum value of SAR (measured) = 0.290 W/kg

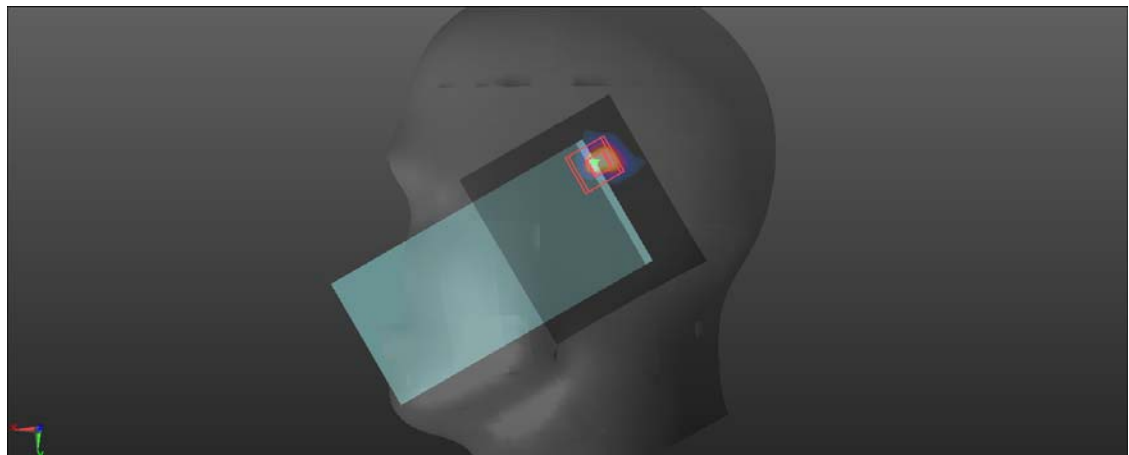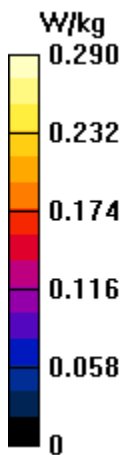

326_WLAN5G_802.11a 6Mbps_Body Front_Ch157

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 34.23$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.39, 4.39, 4.39) @ 5785 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch157/Area Scan (101x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0735 W/kg

Ch157/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.6500 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.0740 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.00955 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 62.7%

Maximum value of SAR (measured) = 0.0481 W/kg

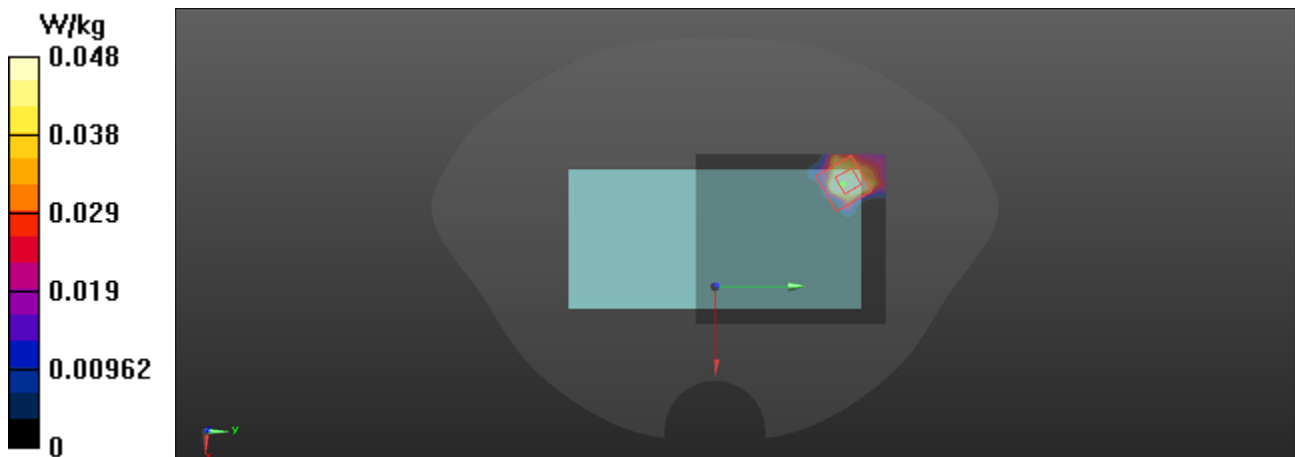

327_WLAN5G_802.11a 6Mbps_Body Back_Ch157

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 34.23$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.39, 4.39, 4.39) @ 5785 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch157/Area Scan (101x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0627 W/kg

Ch157/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.2960 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.0930 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.00863 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 64.2%

Maximum value of SAR (measured) = 0.0562 W/kg

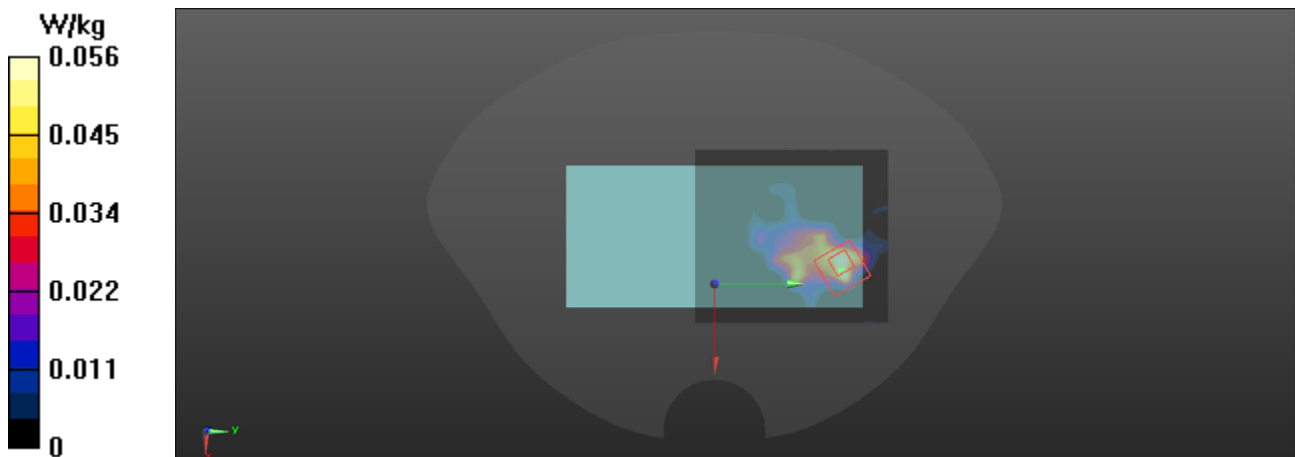

328_WLAN5G_802.11a 6Mbps_Body Left_Ch157

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5785 MHz;Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 34.23$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.39, 4.39, 4.39) @ 5785 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch157/Area Scan (121x41x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0522 W/kg

Ch157/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.7400 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.0620 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.00729 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 56%

Maximum value of SAR (measured) = 0.0316 W/kg

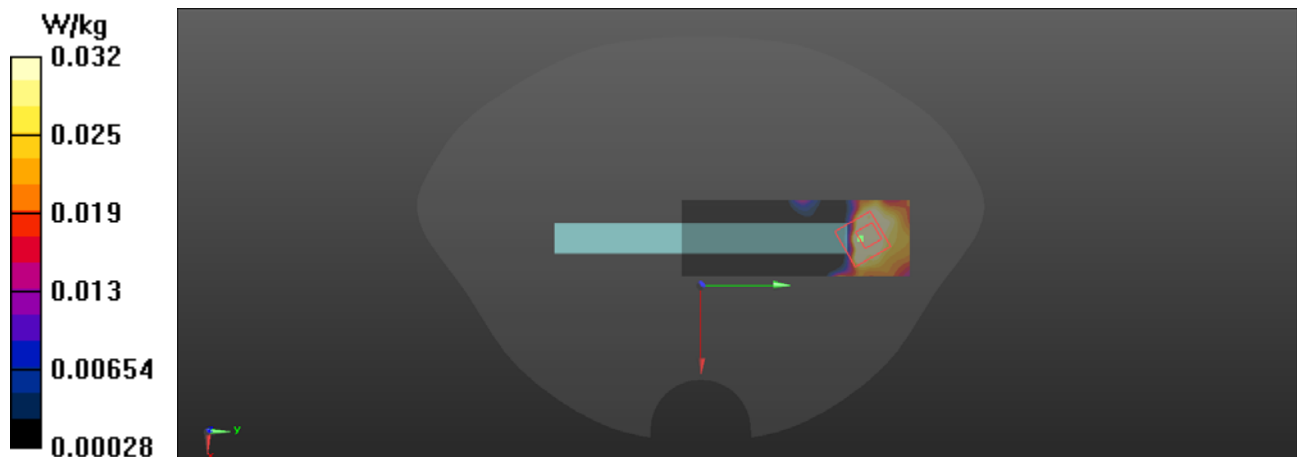

329_WLAN5G_802.11a 6Mbps_Body Right_Ch157

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 34.23$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.39, 4.39, 4.39) @ 5785 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch157/Area Scan (101x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0184 W/kg

Ch157/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.3530 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.0310 W/kg

SAR(1 g) = 0.00598 W/kg; SAR(10 g) = 0.00439 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 61.6%

Maximum value of SAR (measured) = 0.0124 W/kg

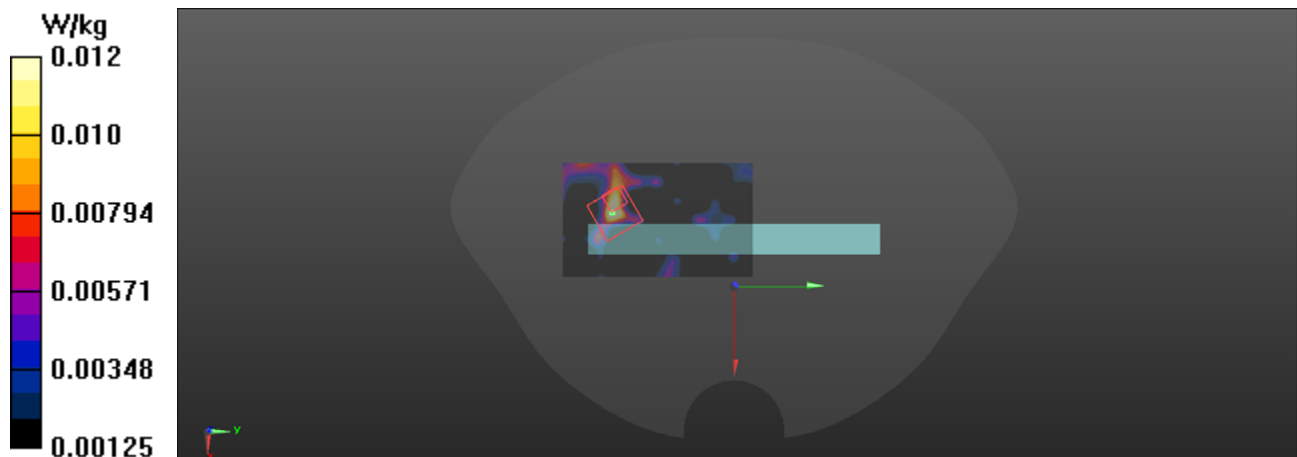

330_WLAN5G_802.11a 6Mbps_Body Top_Ch157

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5785 MHz;Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 34.23$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.39, 4.39, 4.39) @ 5785 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch157/Area Scan (91x31x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.151 W/kg

Ch157/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.4380 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.532 W/kg

SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.022 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 66%

Maximum value of SAR (measured) = 0.146 W/kg

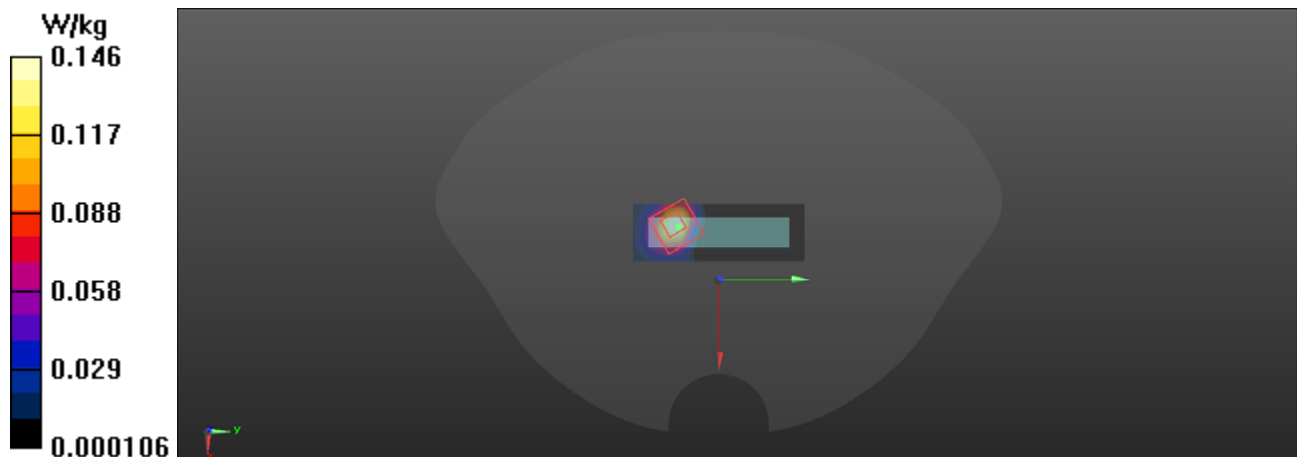

331_WLAN5G_802.11a 6Mbps_Body Top_Ch157

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 34.23$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.39, 4.39, 4.39) @ 5785 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch157/Area Scan (91x31x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.749 W/kg

Ch157/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.238 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.057 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 63.3%

Maximum value of SAR (measured) = 0.752 W/kg

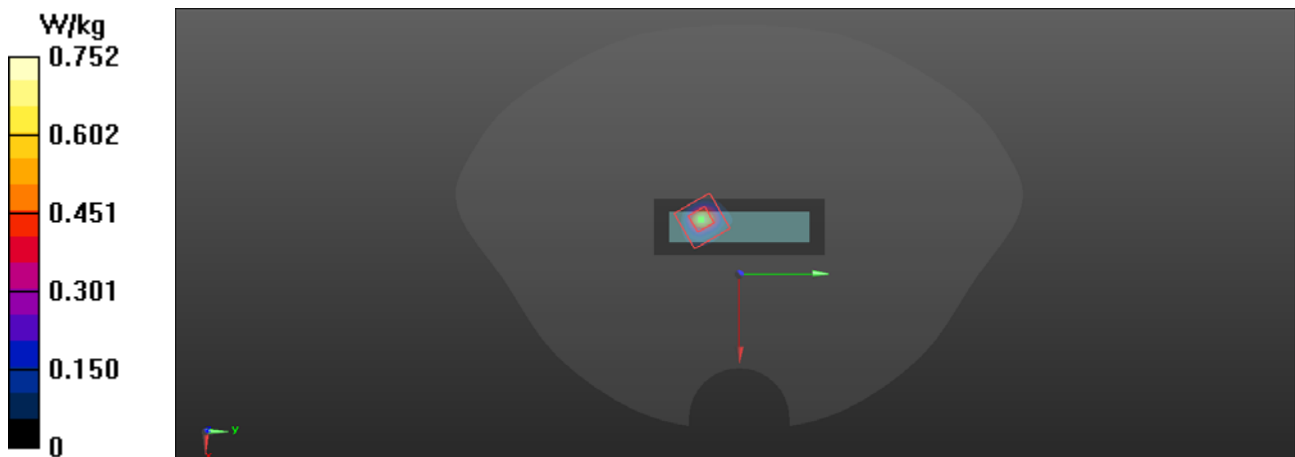

120-1_WLAN 2.4GHz_802.11b 1Mbps_Left Cheek_Ch6

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1


Medium: HSL_2450 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 38.305$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2437 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch0/Area Scan (91x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.819 W/kg

Ch0/Zoom Scan (8x9x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 11.29 V/m; Power Drift = 0.18 dB
Peak SAR (extrapolated) = 0.904 W/kg
SAR(1 g) = 0.560 W/kg; SAR(10 g) = 0.337 W/kg
Smallest distance from peaks to all points 3 dB below = 12.4 mm
Ratio of SAR at M2 to SAR at M1 = 61.1%
Maximum value of SAR (measured) = 0.774 W/kg

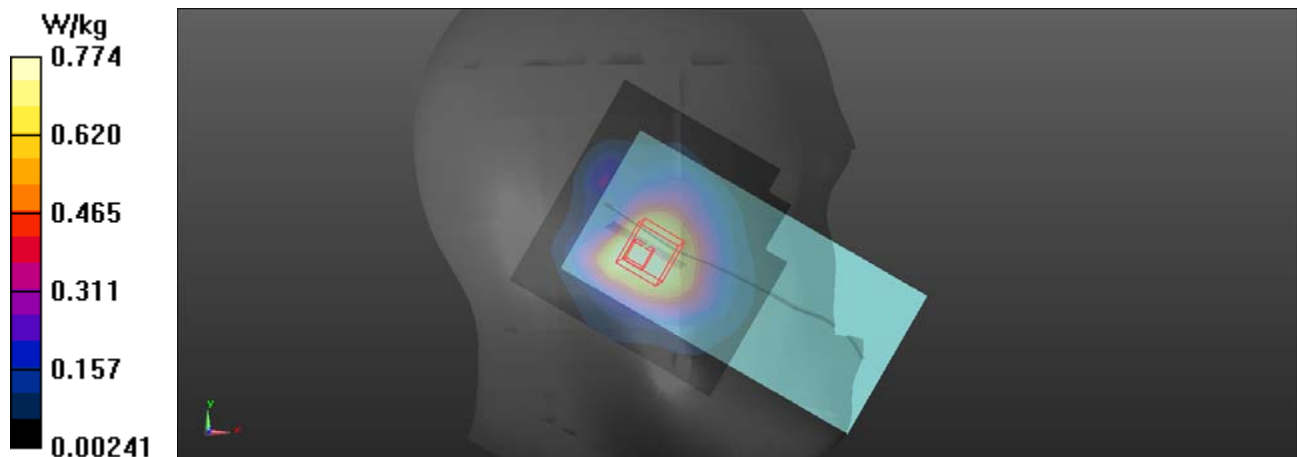

121-1_WLAN2.4G_802.11b 1Mbps_Left Tilt_Ch6

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1


Medium: HSL_2450 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 38.305$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2437 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch6/Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.338 W/kg

Ch6/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 9.198 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 0.370 W/kg
SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.126 W/kg
Smallest distance from peaks to all points 3 dB below = 10 mm
Ratio of SAR at M2 to SAR at M1 = 58.7%
Maximum value of SAR (measured) = 0.318 W/kg

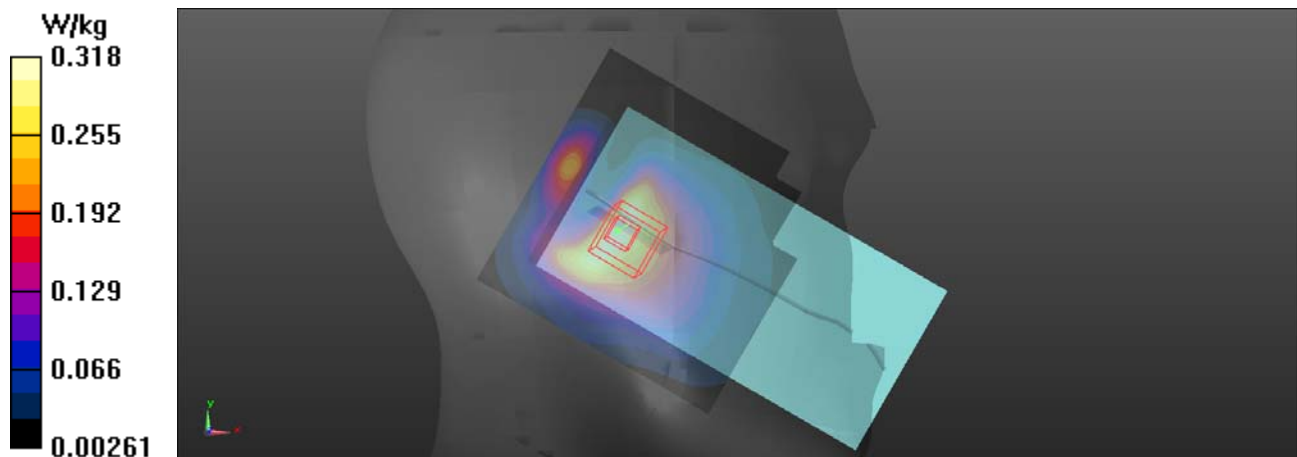

122-1_WLAN2.4G_802.11b 1Mbps_Right Check_Ch6

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL_2450 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 38.305$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2437 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch6/Area Scan (91x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 1.32 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.87 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.839 W/kg; SAR(10 g) = 0.454 W/kg

Smallest distance from peaks to all points 3 dB below = 12.4 mm

Ratio of SAR at M2 to SAR at M1 = 62%

Maximum value of SAR (measured) = 1.20 W/kg

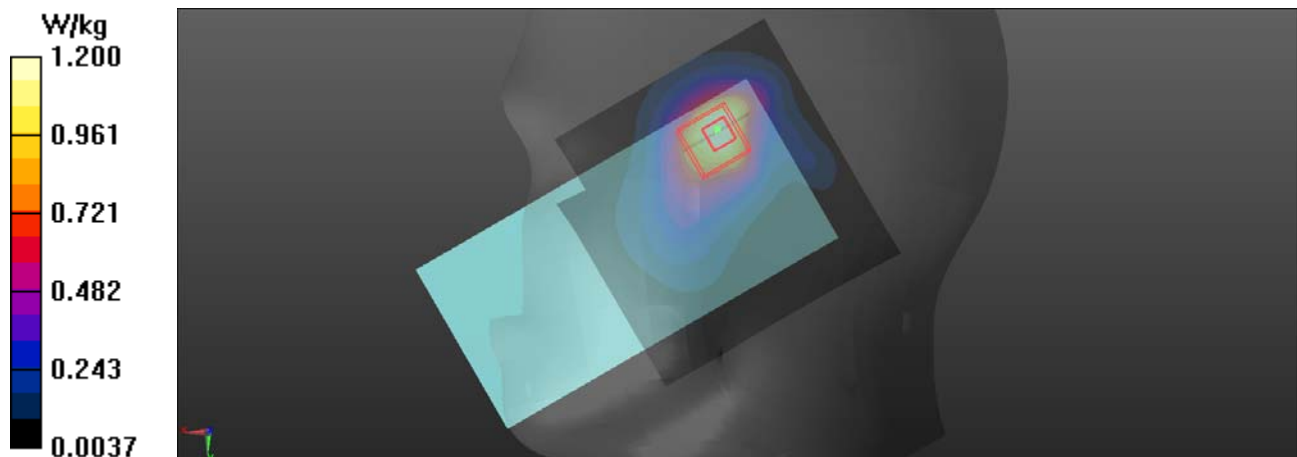

123-1_WLAN2.4G_802.11b 1Mbps_Right Tilt_Ch6

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL_2450 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 38.305$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2437 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch0/Area Scan (91x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.788 W/kg

Ch0/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.615 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 0.945 W/kg

SAR(1 g) = 0.550 W/kg; SAR(10 g) = 0.295 W/kg

Smallest distance from peaks to all points 3 dB below = 11.4 mm

Ratio of SAR at M2 to SAR at M1 = 57.5%

Maximum value of SAR (measured) = 0.803 W/kg

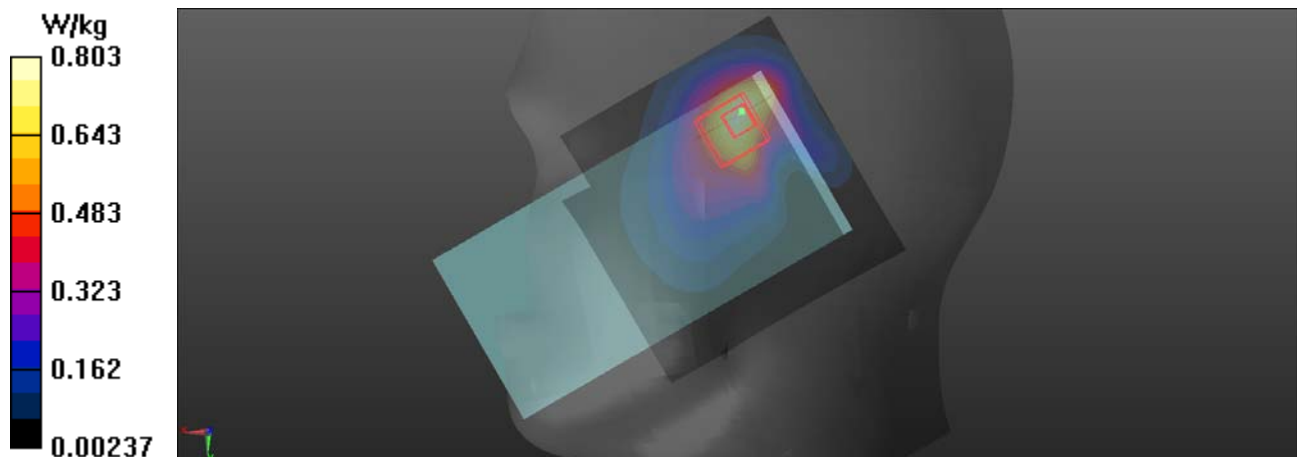

310-1_WLAN2.4G_802.11b 1Mbps_Body Front_Ch6

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1


Medium: HSL_2450 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 38.305$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2437 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch6/Area Scan (91x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.221 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 8.271 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.257 W/kg
SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.091 W/kg
Smallest distance from peaks to all points 3 dB below = 16.3 mm
Ratio of SAR at M2 to SAR at M1 = 56.3%
Maximum value of SAR (measured) = 0.215 W/kg

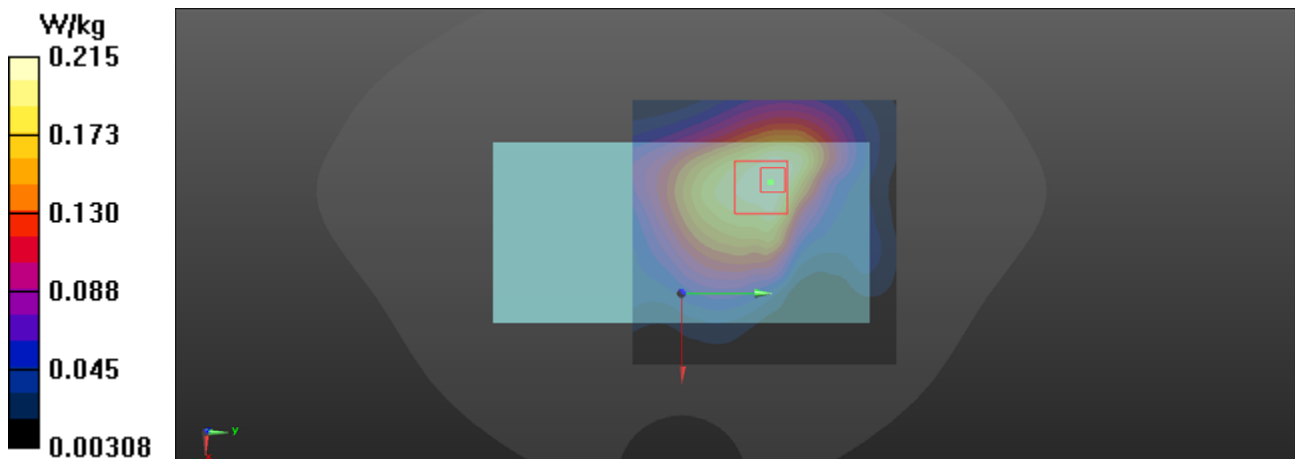

311-1_WLAN2.4G_802.11b 1Mbps_Body Back_Ch6

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1


Medium: HSL_2450 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 38.305$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2437 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch6/Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.177 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.949 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 0.226 W/kg
SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.065 W/kg
Smallest distance from peaks to all points 3 dB below = 15 mm
Ratio of SAR at M2 to SAR at M1 = 51.9%
Maximum value of SAR (measured) = 0.185 W/kg

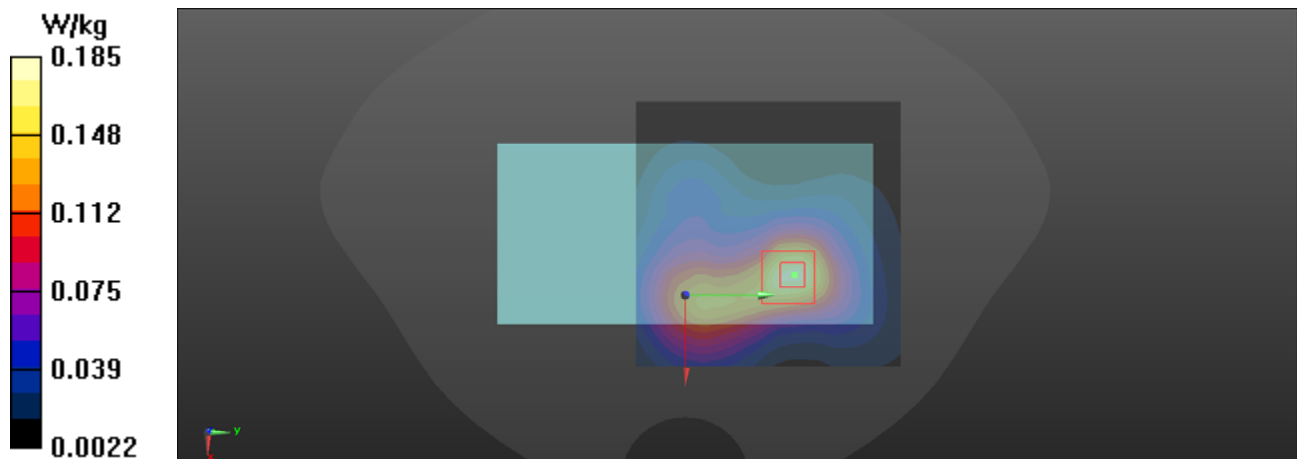

312-1_WLAN2.4G_802.11b 1Mbps_Body Left_Ch6

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1


Medium: HSL_2450 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 38.305$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2437 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch6/Area Scan (41x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.376 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 10.91 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.455 W/kg
SAR(1 g) = 0.251 W/kg; SAR(10 g) = 0.140 W/kg
Smallest distance from peaks to all points 3 dB below = 15 mm
Ratio of SAR at M2 to SAR at M1 = 54.5%
Maximum value of SAR (measured) = 0.380 W/kg

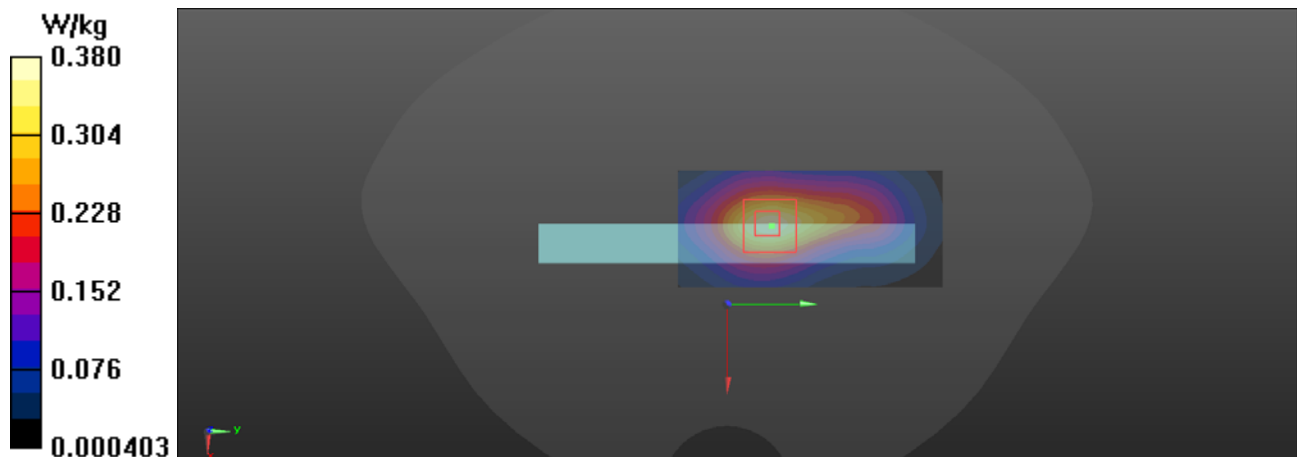

313-1_WLAN2.4G_802.11b 1Mbps_Body Right_Ch6

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1


Medium: HSL_2450 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 38.305$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2437 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch6/Area Scan (41x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0201 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.717 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.0240 W/kg
SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00613 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 47.7%
Maximum value of SAR (measured) = 0.0185 W/kg

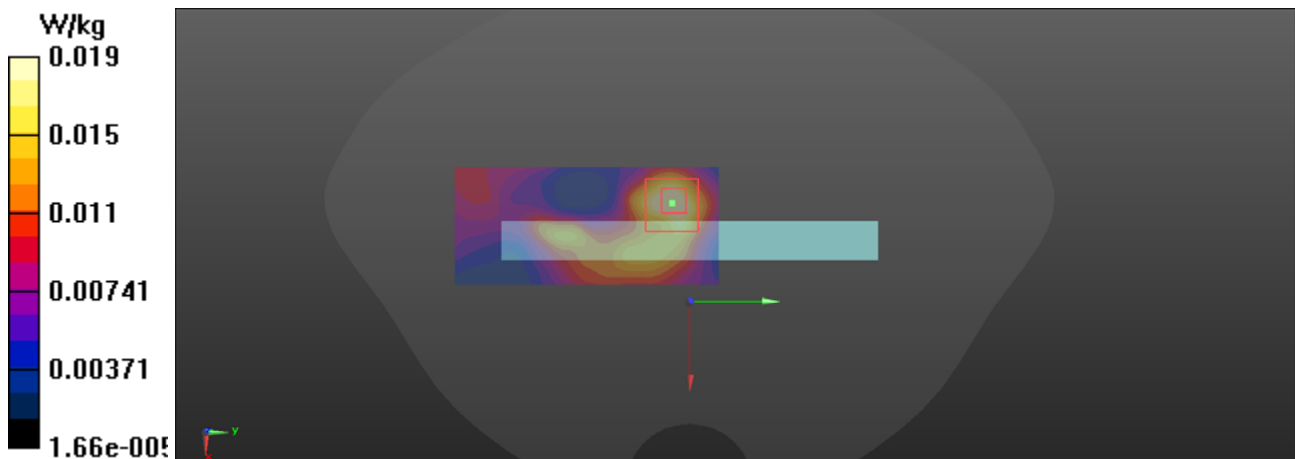

314-1_WLAN2.4G_802.11b 1Mbps_Body Top_Ch6

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL_2450 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 38.305$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2437 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch6/Area Scan (41x91x1): Interpolated grid: $dx=1.200$

Maximum value of SAR (interpolated) = 0.0833 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.125 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 0.0950 W/kg

SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.029 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 55%

Maximum value of SAR (measured) = 0.0773 W/kg

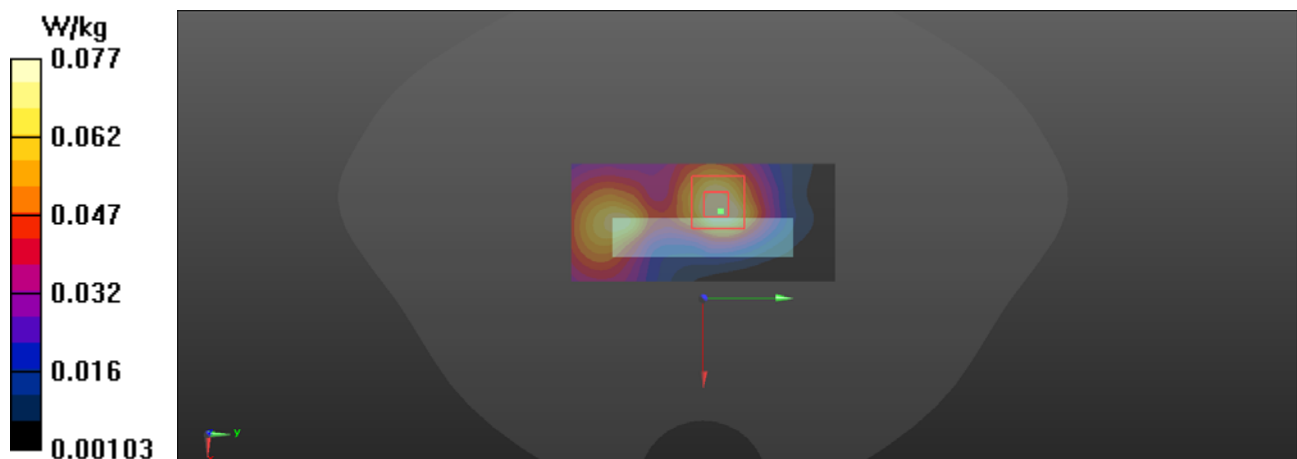

315-1_WLAN2.4G_802.11b 1Mbps_Body Back_Ch6

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1


Medium: HSL_2450 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 38.305$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2437 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch6/Area Scan (91x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 1.30 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 8.084 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 1.64 W/kg
SAR(1 g) = 0.823 W/kg; SAR(10 g) = 0.416 W/kg
Smallest distance from peaks to all points 3 dB below = 11 mm
Ratio of SAR at M2 to SAR at M1 = 52.6%
Maximum value of SAR (measured) = 1.29 W/kg

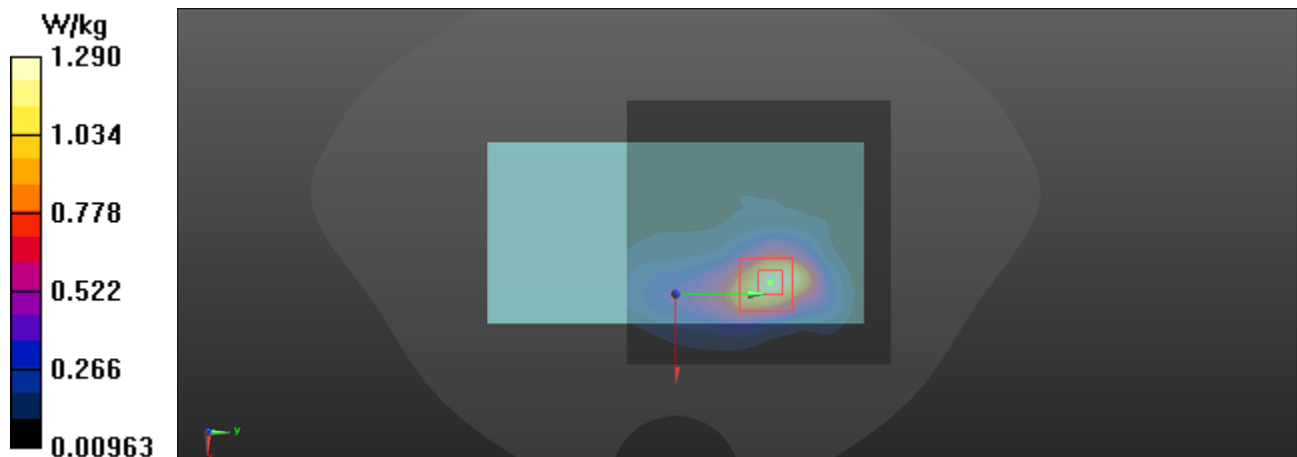

135-1_BT_1DH5_Left Check_Ch0

DUT: T5810


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.3499
Medium: HSL_2450 Medium parameters used : $f = 2402$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.454$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2402 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch0/Area Scan (81x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.0862 W/kg

Ch0/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 3.621 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 0.0910 W/kg
SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.034 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 60.4%
Maximum value of SAR (measured) = 0.0784 W/kg

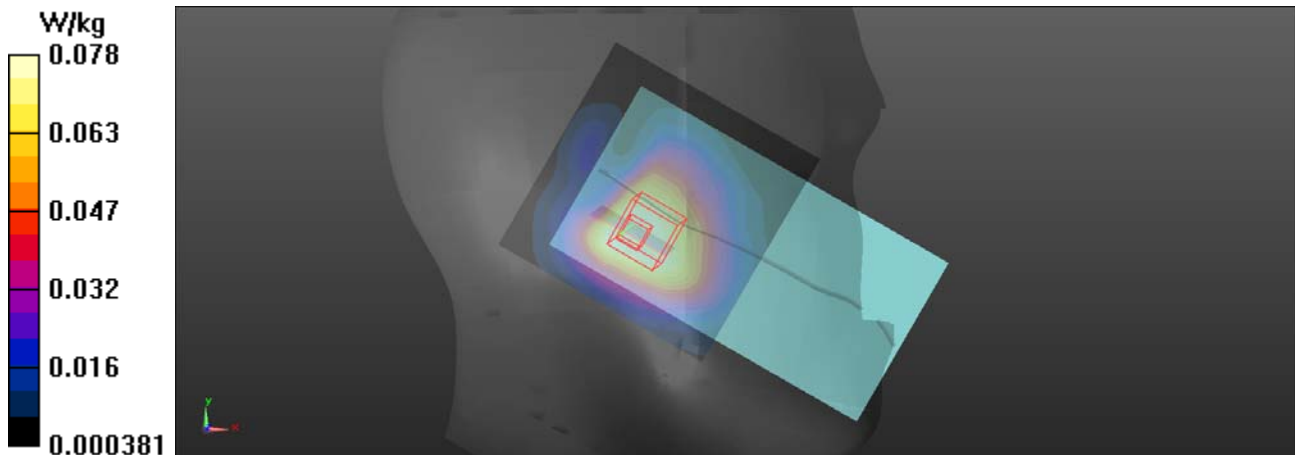

136-1_BT_1DH5_Left Tilt_Ch0

DUT: T5810

Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.3499

Medium: HSL_2450 Medium parameters used : $f = 2402$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.454$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2402 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch0/Area Scan (81x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0370 W/kg

Ch0/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.893 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 0.0430 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.015 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 58.1%

Maximum value of SAR (measured) = 0.0361 W/kg

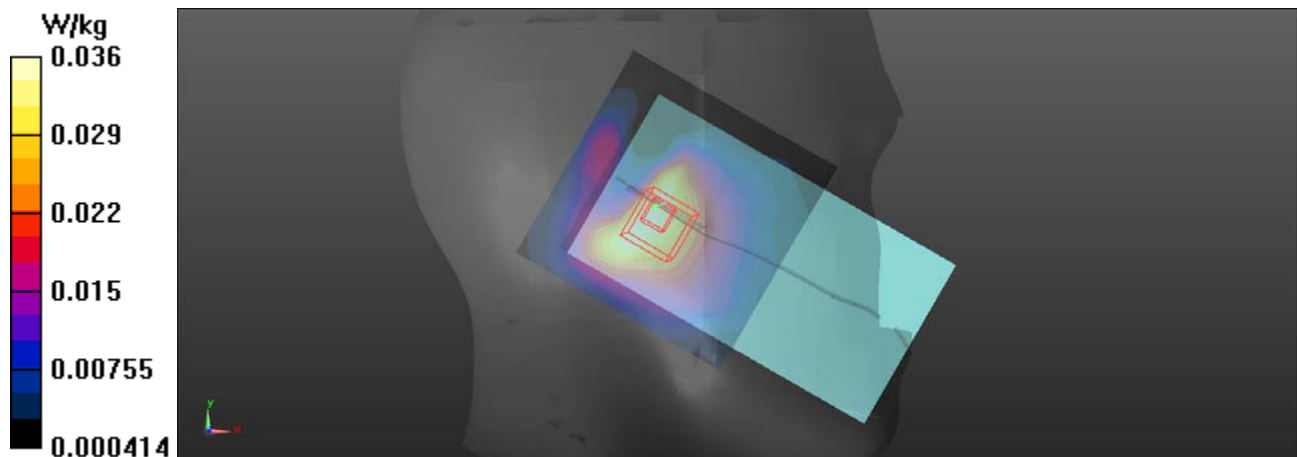

137-1_BT_1DH5_Right Check_Ch0

DUT: T5810


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.3499
Medium: HSL_2450 Medium parameters used : $f = 2402$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.454$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2402 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch0/Area Scan (81x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.155 W/kg

Ch0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 4.043 V/m; Power Drift = 0.13 dB
Peak SAR (extrapolated) = 0.172 W/kg
SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.056 W/kg
Smallest distance from peaks to all points 3 dB below = 11.3 mm
Ratio of SAR at M2 to SAR at M1 = 63.9%
Maximum value of SAR (measured) = 0.148 W/kg

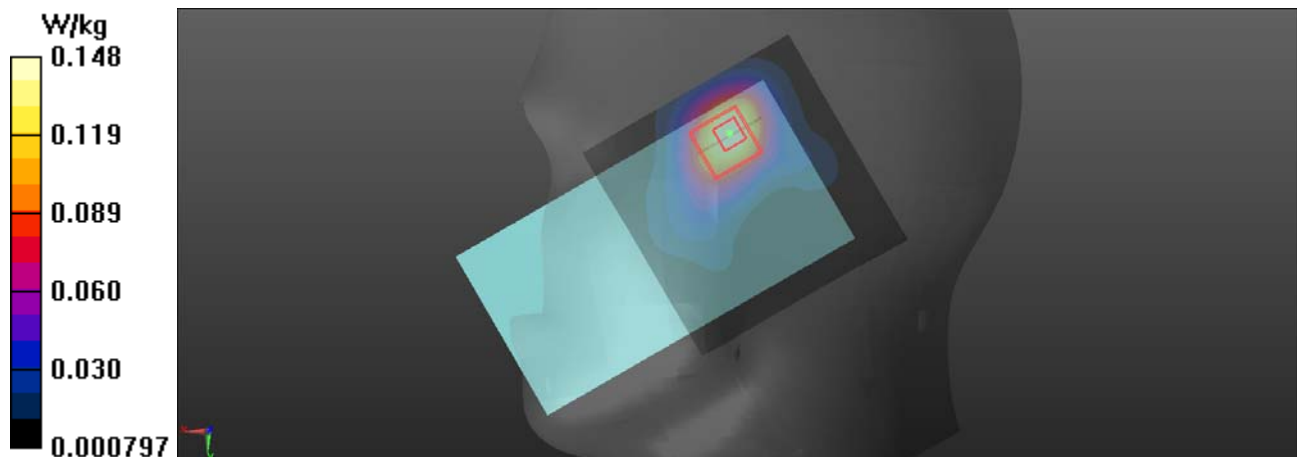

138-1_BT_1DH5_Right Tilt_Ch0

DUT: T5810



Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.3499
Medium: HSL_2450 Medium parameters used : $f = 2402$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.454$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2402 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch0/Area Scan (81x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.0722 W/kg

Ch0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 3.145 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 0.0910 W/kg
SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.028 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 60.1%
Maximum value of SAR (measured) = 0.0762 W/kg

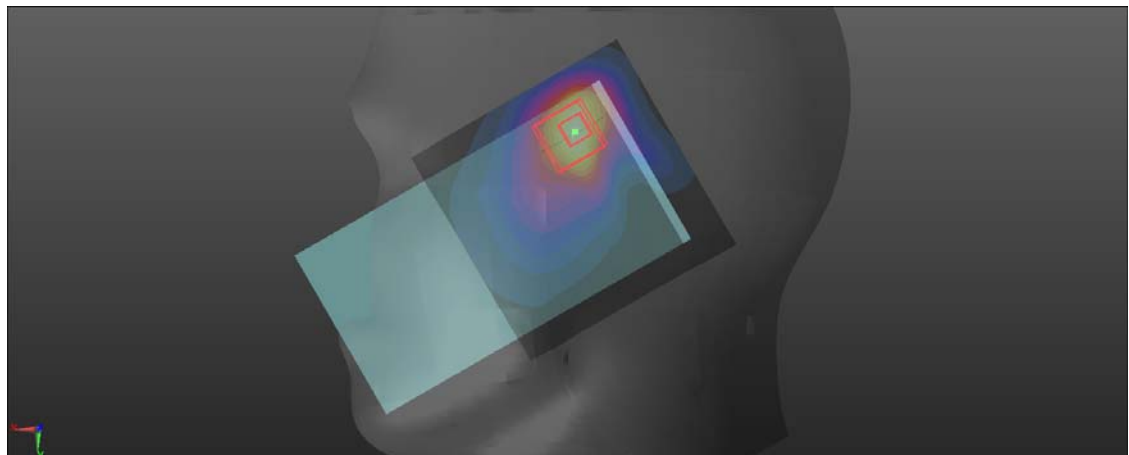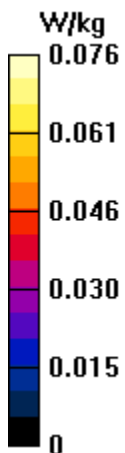

333-1_BT_1DH5_Body Front_Ch0

DUT: T5810


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.3499
Medium: HSL_2450 Medium parameters used : $f = 2402$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.454$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2402 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch0/Area Scan (81x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.0239 W/kg

Ch0/Zoom Scan (8x9x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 2.778 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 0.0280 W/kg
SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.00997 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 56.1%
Maximum value of SAR (measured) = 0.0241 W/kg

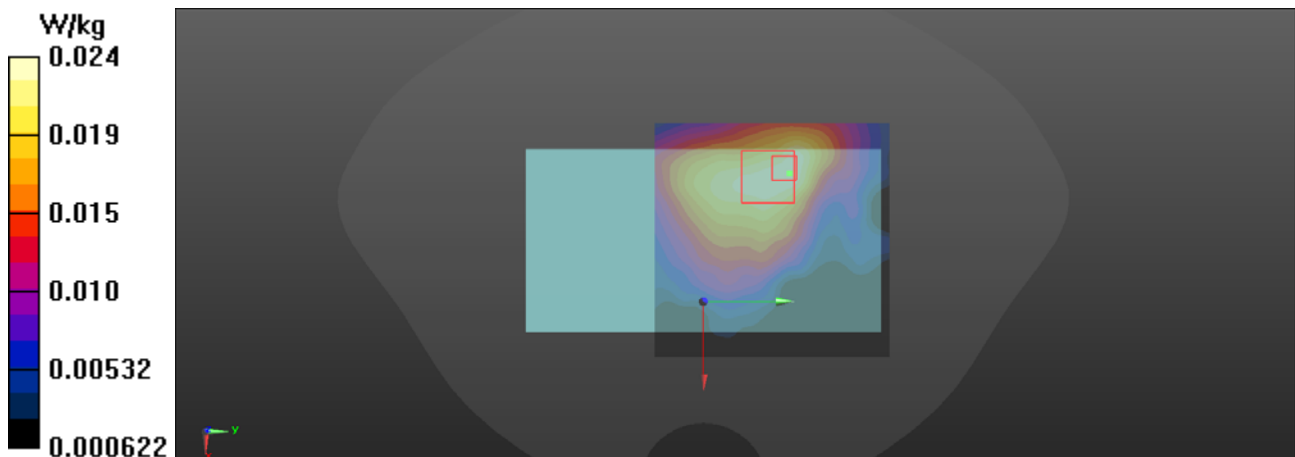

334-1_BT_1DH5_Body Back_Ch0

DUT: T5810


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.3499
Medium: HSL_2450 Medium parameters used : $f = 2402$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.454$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2402 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch0/Area Scan (81x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.0323 W/kg

Ch0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 2.368 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 0.0400 W/kg
SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.011 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 50.9%
Maximum value of SAR (measured) = 0.0327 W/kg

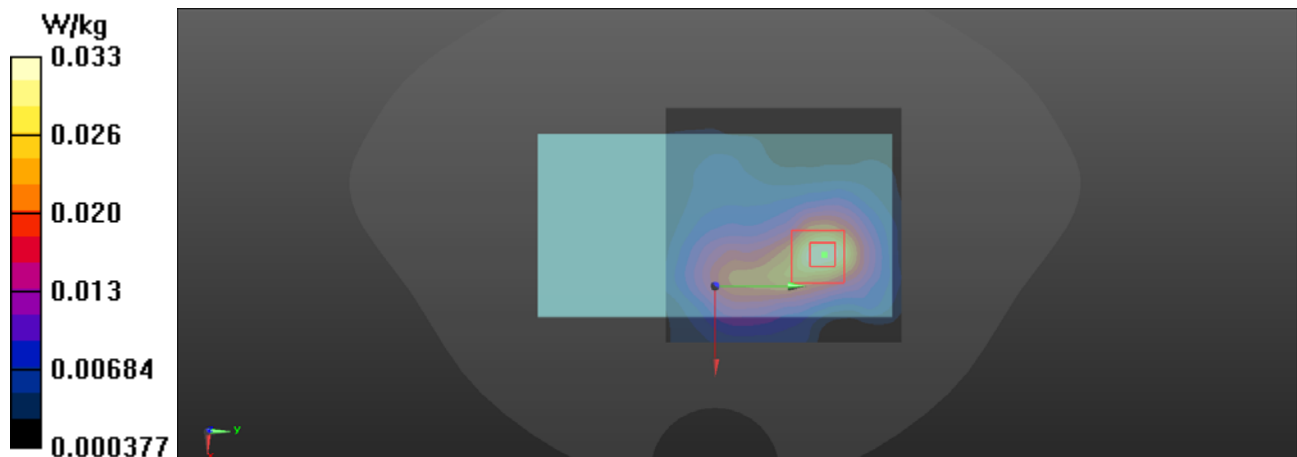

335-1_BT_1DH5_Body Left_Ch0

DUT: T5810


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.3499
Medium: HSL_2450 Medium parameters used : $f = 2402$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.454$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2402 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch0/Area Scan (31x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.0340 W/kg

Ch0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 3.665 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.0420 W/kg
SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.013 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 49.7%
Maximum value of SAR (measured) = 0.0335 W/kg

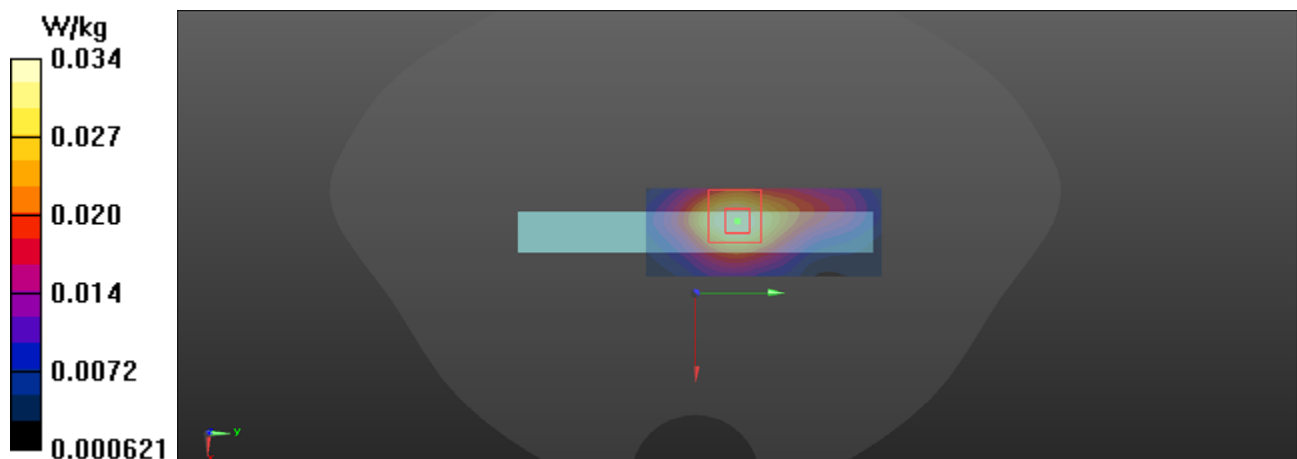

336-1_BT_1DH5_Body Right_Ch0

DUT: T5810


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.3499
Medium: HSL_2450 Medium parameters used : $f = 2402$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.454$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2402 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch0/Area Scan (51x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.00323 W/kg

Ch0/Zoom Scan (8x9x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 0.805 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.00371 W/kg
SAR(1 g) = 0.00157 W/kg; SAR(10 g) = 0.00104 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 62.6%
Maximum value of SAR (measured) = 0.00274 W/kg

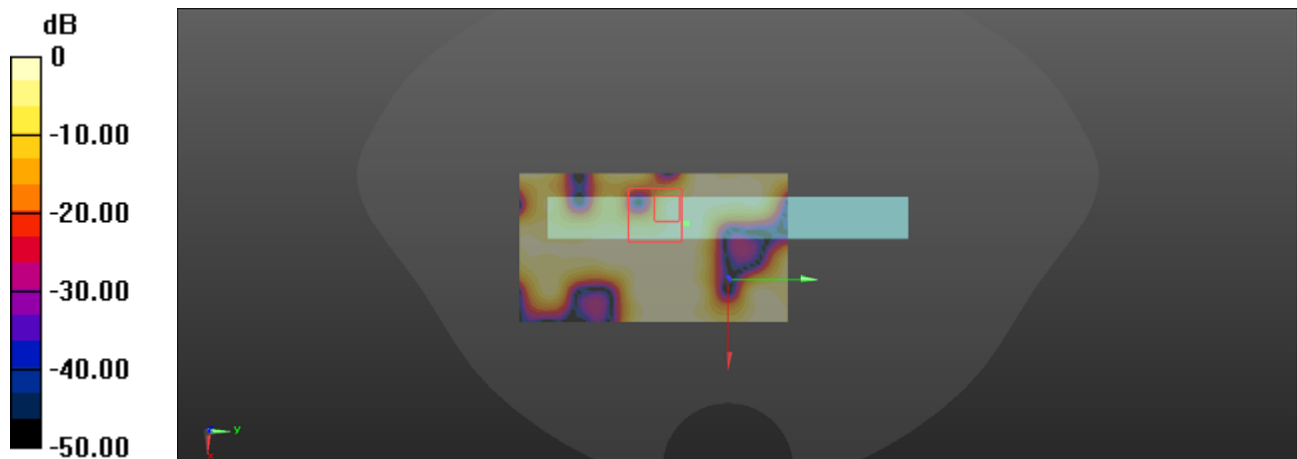

0 dB = 0.00274 W/kg = -25.62 dBW/kg

337-1_BT_1DH5_Body Top_Ch0

DUT: T5810


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz;Duty Cycle: 1:1.3499
Medium: HSL_2450 Medium parameters used : $f = 2402$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.454$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2402 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch0/Area Scan (41x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0122 W/kg

Ch0/Zoom Scan (10x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.344 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 0.0190 W/kg
SAR(1 g) = 0.00425 W/kg; SAR(10 g) = 0.00203 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 56.9%
Maximum value of SAR (measured) = 0.00680 W/kg

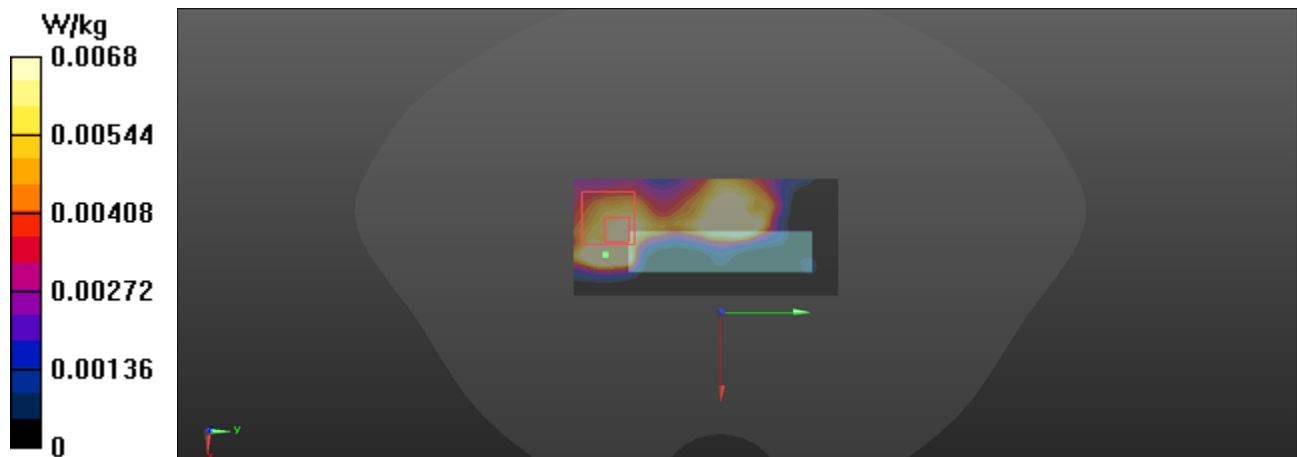

338-1_BT_1DH5_Body Back_Ch0

DUT: T5810

Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz;Duty Cycle: 1:1.3499

Medium: HSL_2450 Medium parameters used : $f = 2402$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.454$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2402 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch0/Area Scan (81x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.150 W/kg

Ch0/Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.109 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.049 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 50.4%

Maximum value of SAR (measured) = 0.149 W/kg

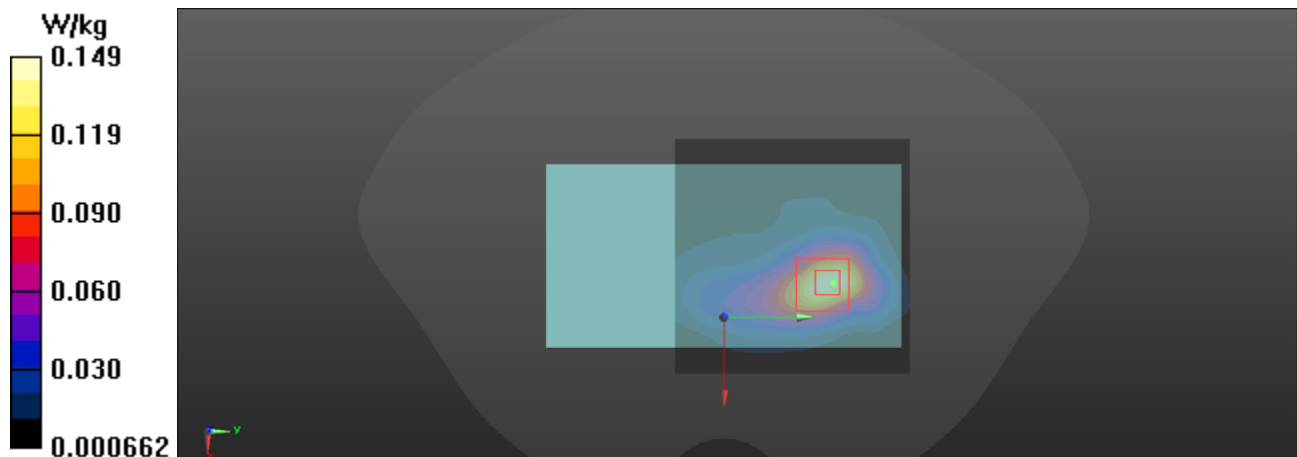

125-1_WLAN5G_802.11a 6Mbps_Left Check_Ch40

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: HSL_5G Medium parameters used: $f = 5200$ MHz; $\sigma = 4.561$ S/m; $\epsilon_r = 35.919$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.8, 4.8, 4.8) @ 5200 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch40/Area Scan (101x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 1.60 W/kg

Ch40/Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 10.28 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 0.672 W/kg; SAR(10 g) = 0.253 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 71.3%

Maximum value of SAR (measured) = 1.41 W/kg

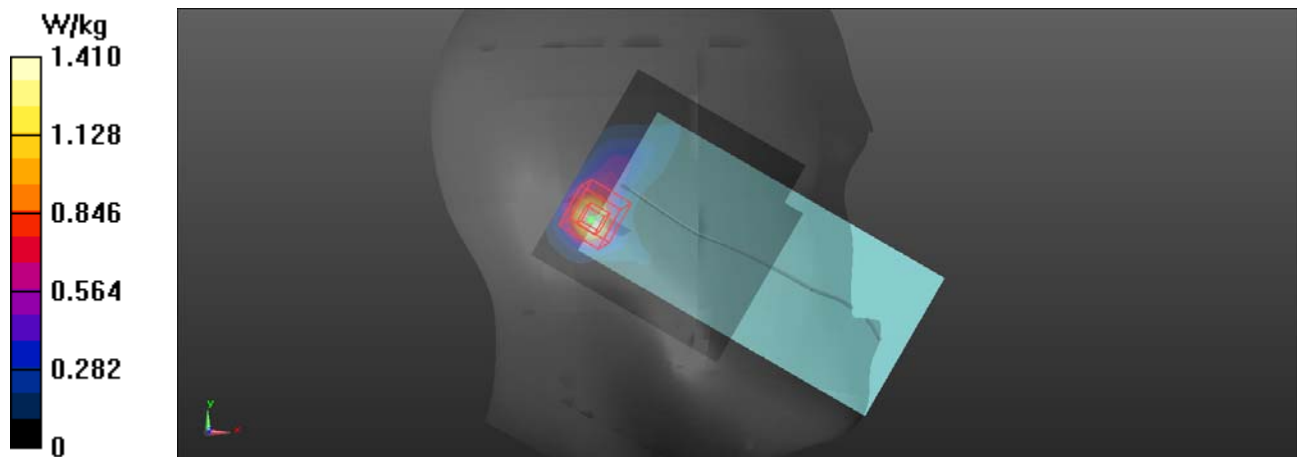

126-1_WLAN5G_802.11a 6Mbps_Left Tilt_Ch40

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: HSL_5G Medium parameters used: $f = 5200$ MHz; $\sigma = 4.561$ S/m; $\epsilon_r = 35.919$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.8, 4.8, 4.8) @ 5200 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch40/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.93 W/kg

Ch40/Zoom Scan (8x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 10.43 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 2.33 W/kg

SAR(1 g) = 0.792 W/kg; SAR(10 g) = 0.282 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 72.2%

Maximum value of SAR (measured) = 1.66 W/kg

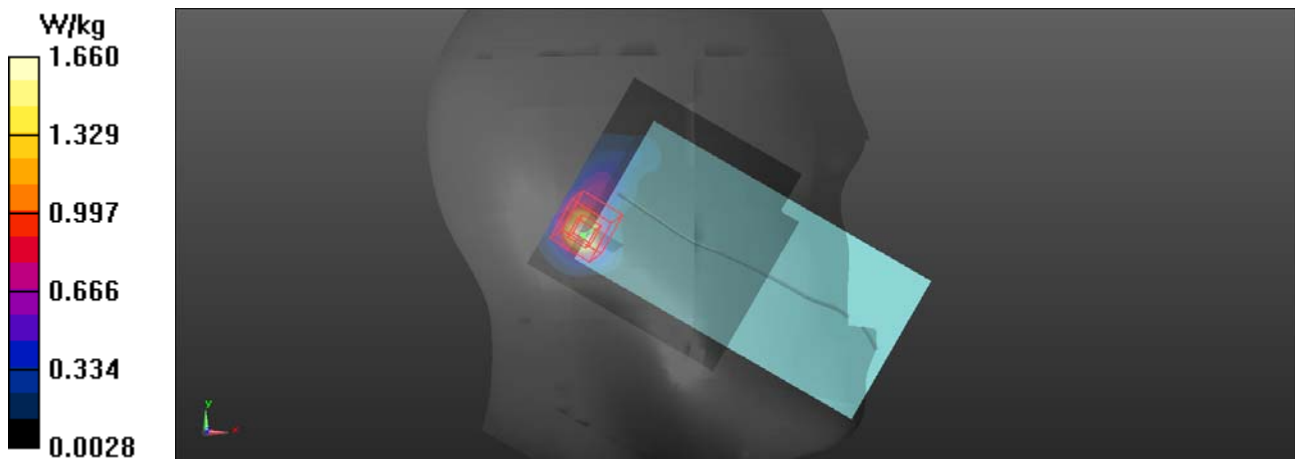

127-1_WLAN5G_802.11a 6Mbps_Right Check_Ch40

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5200 MHz; Duty Cycle: 1:1


Medium: HSL_5G Medium parameters used: $f = 5200$ MHz; $\sigma = 4.561$ S/m; $\epsilon_r = 35.919$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.8, 4.8, 4.8) @ 5200 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch40/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.83 W/kg

Ch40/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 7.356 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 2.49 W/kg
SAR(1 g) = 0.739 W/kg; SAR(10 g) = 0.246 W/kg
Smallest distance from peaks to all points 3 dB below = 8 mm
Ratio of SAR at M2 to SAR at M1 = 69.2%
Maximum value of SAR (measured) = 1.69 W/kg

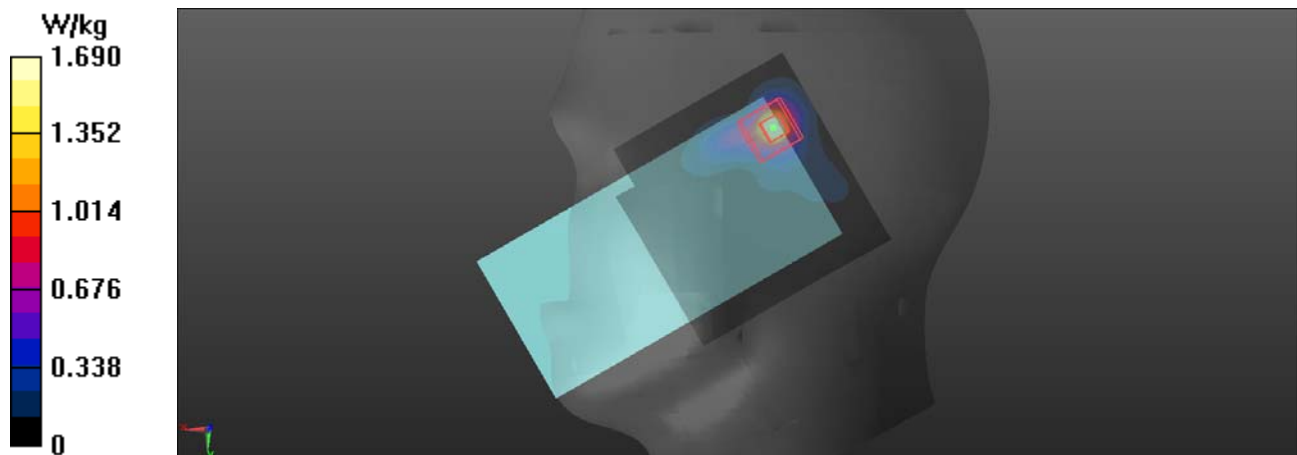

128-1_WLAN5G_802.11a 6Mbps_Right Tilt_Ch40

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: HSL_5G Medium parameters used: $f = 5200$ MHz; $\sigma = 4.561$ S/m; $\epsilon_r = 35.919$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.8, 4.8, 4.8) @ 5200 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch40/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.57 W/kg

Ch40/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.076 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 2.39 W/kg

SAR(1 g) = 0.718 W/kg; SAR(10 g) = 0.230 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 69.7%

Maximum value of SAR (measured) = 1.63 W/kg

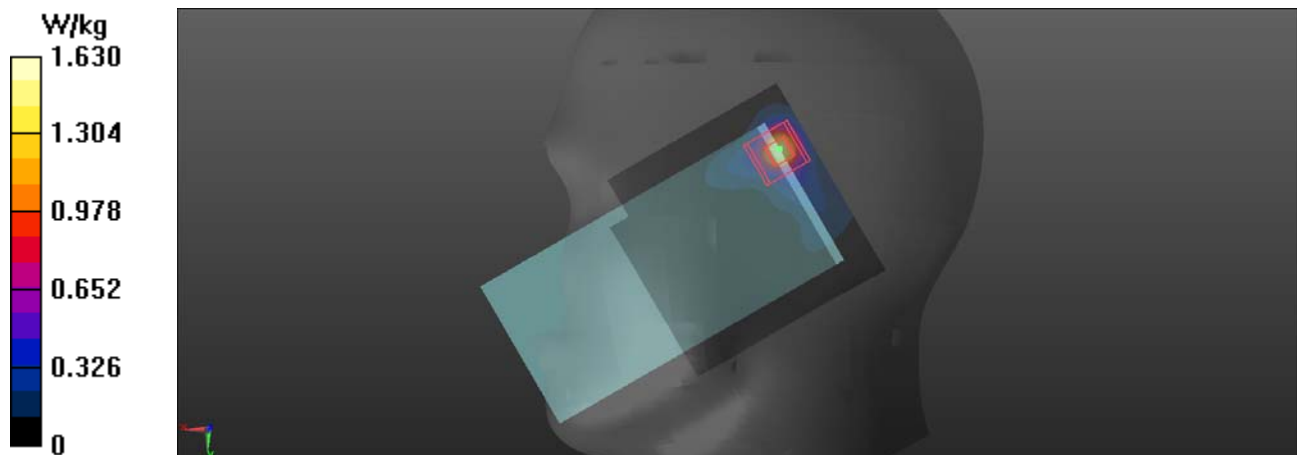

317-1_WLAN5G_802.11a 6Mbps_Body Front_Ch40

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: HSL_5G Medium parameters used: $f = 5200$ MHz; $\sigma = 4.561$ S/m; $\epsilon_r = 35.919$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.8, 4.8, 4.8) @ 5200 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch40/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.488 W/kg

Ch40/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.468 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.720 W/kg

SAR(1 g) = 0.232 W/kg; SAR(10 g) = 0.091 W/kg

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Ratio of SAR at M2 to SAR at M1 = 69.2%

Maximum value of SAR (measured) = 0.497 W/kg

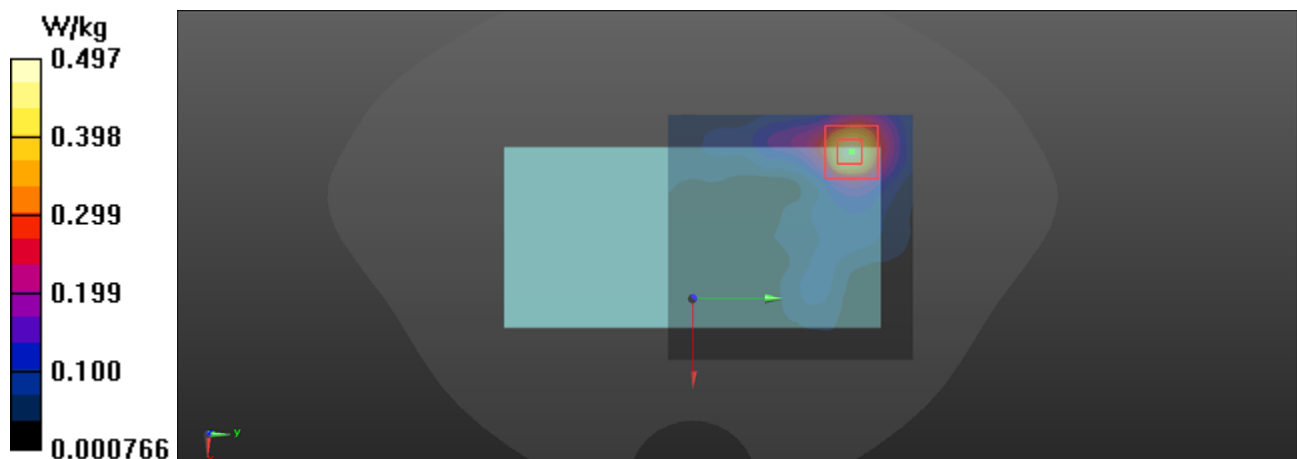

318-1_WLAN5G_802.11a 6Mbps_Body Back_Ch40

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: HSL_5G Medium parameters used: $f = 5200$ MHz; $\sigma = 4.561$ S/m; $\epsilon_r = 35.919$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.8, 4.8, 4.8) @ 5200 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch40/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.600 W/kg

Ch40/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.1 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.888 W/kg

SAR(1 g) = 0.294 W/kg; SAR(10 g) = 0.123 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 68.8%

Maximum value of SAR (measured) = 0.603 W/kg

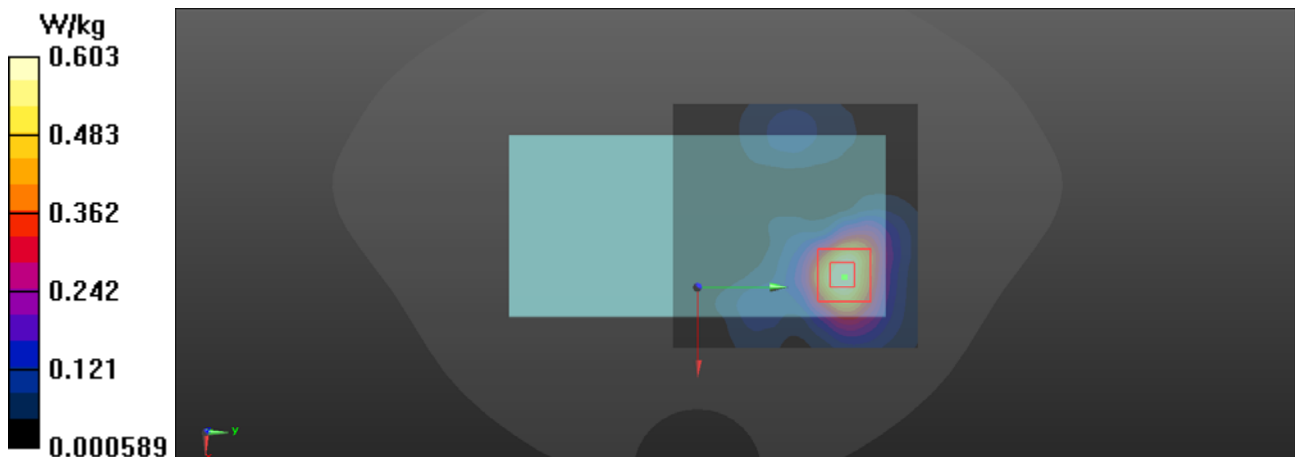

319-1_WLAN5G_802.11a 6Mbps_Body Left_Ch40

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5200 MHz;Duty Cycle: 1:1

Medium: HSL_5G Medium parameters used: $f = 5200$ MHz; $\sigma = 4.561$ S/m; $\epsilon_r = 35.919$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.8, 4.8, 4.8) @ 5200 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch40/Area Scan (41x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.270 W/kg

Ch40/Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 4.404 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.396 W/kg

SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.058 W/kg

Smallest distance from peaks to all points 3 dB below = 13.6 mm

Ratio of SAR at M2 to SAR at M1 = 68.6%

Maximum value of SAR (measured) = 0.269 W/kg

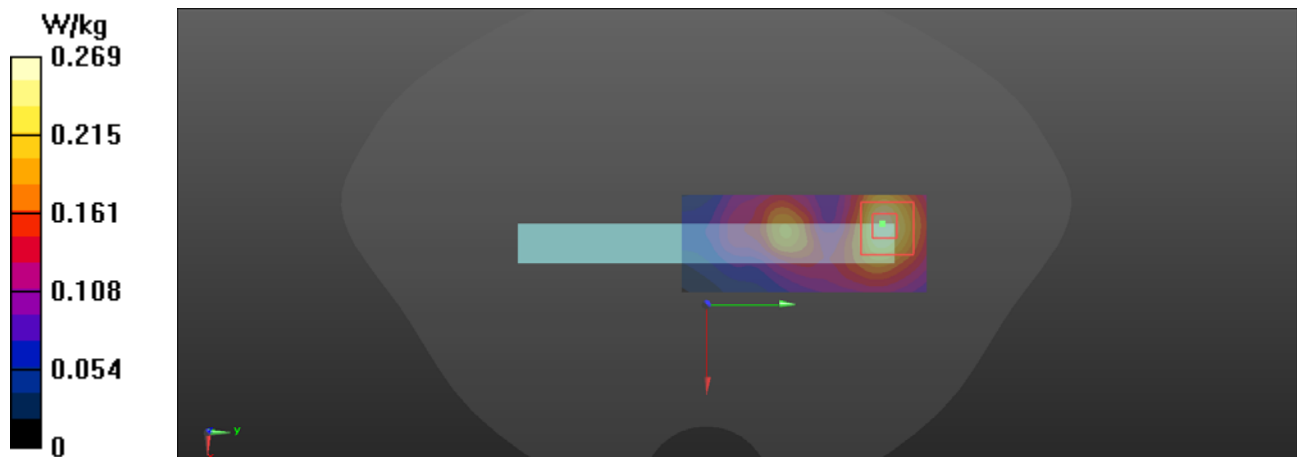

320-1_WLAN5G_802.11a 6Mbps_Body Right_Ch40

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: HSL_5G Medium parameters used: $f = 5200$ MHz; $\sigma = 4.561$ S/m; $\epsilon_r = 35.919$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.8, 4.8, 4.8) @ 5200 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch40/Area Scan (51x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.213 W/kg

Ch40/Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0.7910 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.299 W/kg

SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.038 W/kg

Smallest distance from peaks to all points 3 dB below = 11.1 mm

Ratio of SAR at M2 to SAR at M1 = 69.8%

Maximum value of SAR (measured) = 0.205 W/kg

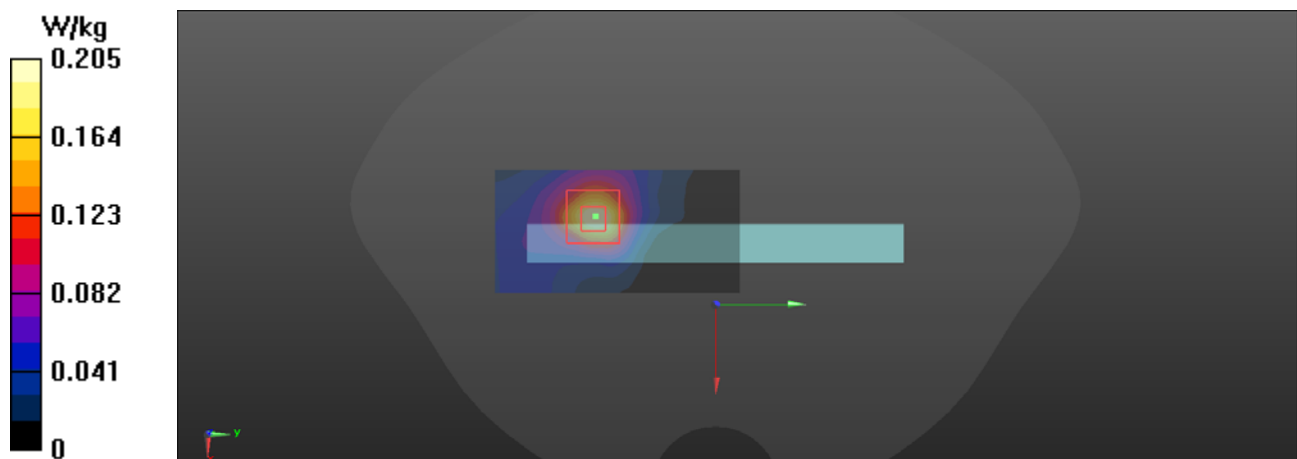

321-1_WLAN5G_802.11a 6Mbps_Body Top_Ch40

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: HSL_5G Medium parameters used: $f = 5200$ MHz; $\sigma = 4.561$ S/m; $\epsilon_r = 35.919$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.8, 4.8, 4.8) @ 5200 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch40/Area Scan (41x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.406 W/kg

Ch40/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.353 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.633 W/kg

SAR(1 g) = 0.202 W/kg; SAR(10 g) = 0.084 W/kg

Smallest distance from peaks to all points 3 dB below = 12 mm

Ratio of SAR at M2 to SAR at M1 = 67.9%

Maximum value of SAR (measured) = 0.416 W/kg

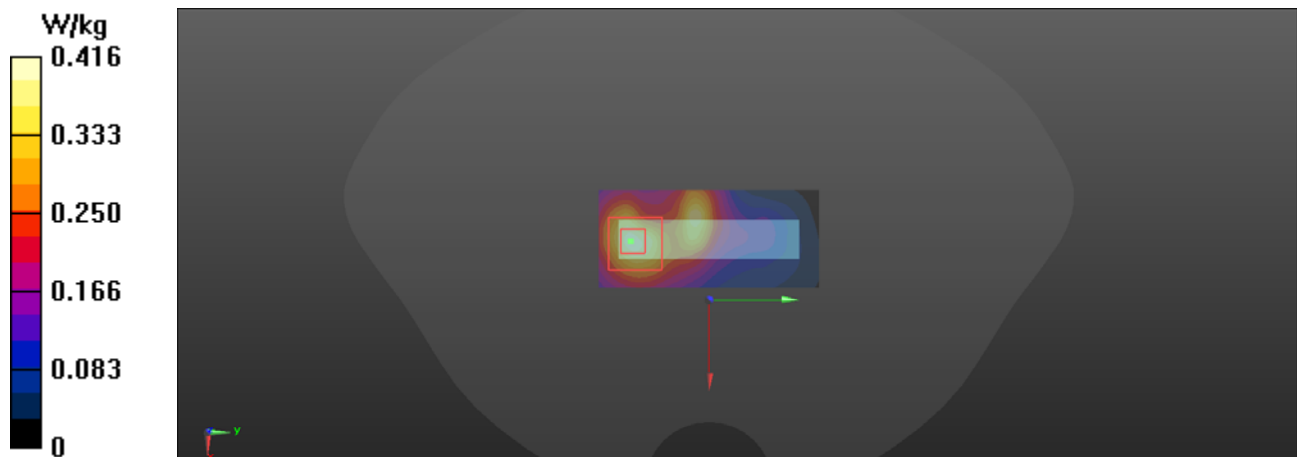

322-1_WLAN5G_802.11a 6Mbps_Body Back_Ch40

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: HSL_5G Medium parameters used: $f = 5200$ MHz; $\sigma = 4.561$ S/m; $\epsilon_r = 35.919$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.8, 4.8, 4.8) @ 5200 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch40/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.41 W/kg

Ch40/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.5620 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 2.25 W/kg

SAR(1 g) = 0.657 W/kg; SAR(10 g) = 0.239 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 67%

Maximum value of SAR (measured) = 1.42 W/kg

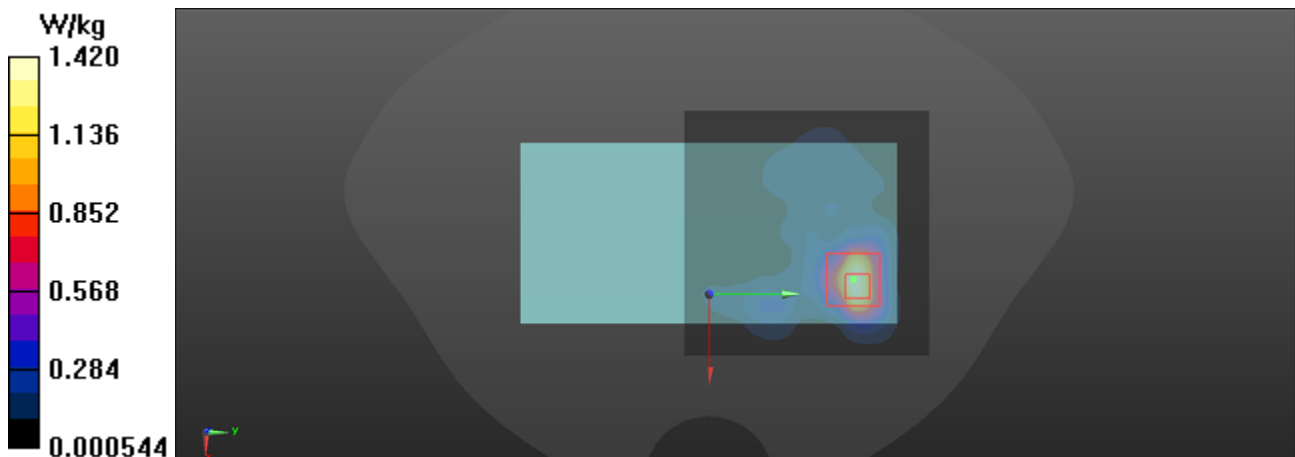

130-1_WLAN5G_802.11a 6Mbps_Left Check_Ch157

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 34.23$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.39, 4.39, 4.39) @ 5785 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch157/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.52 W/kg

Ch157/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 7.712 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 0.616 W/kg; SAR(10 g) = 0.215 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 69.7%

Maximum value of SAR (measured) = 1.36 W/kg

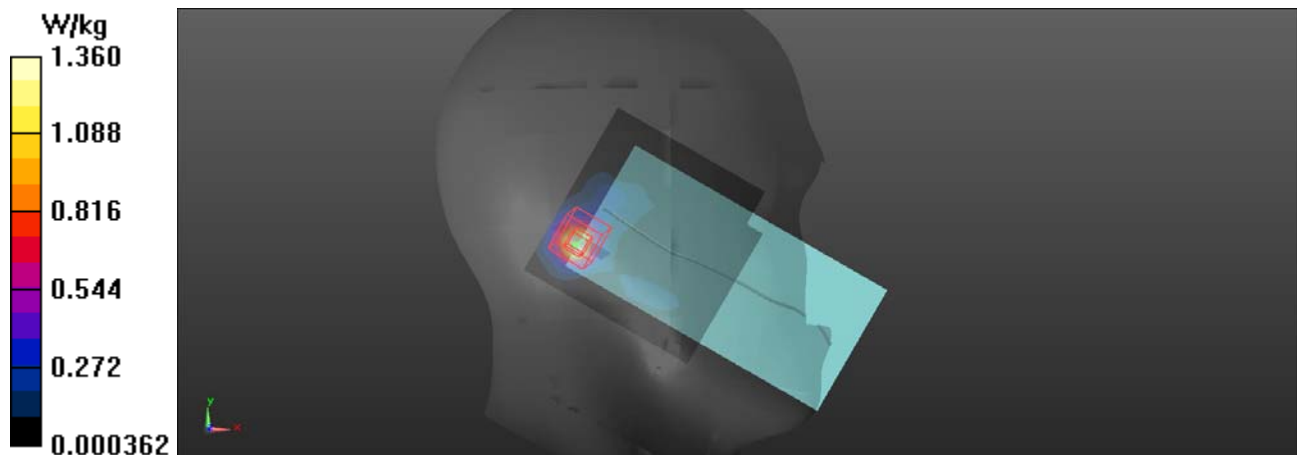

131-1_WLAN5G_802.11a 6Mbps_Left Tilt_Ch157

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 34.23$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.39, 4.39, 4.39) @ 5785 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch157/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.69 W/kg

Ch157/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.142 V/m; Power Drift = -0.01 dB



Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 0.663 W/kg; SAR(10 g) = 0.228 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 69.7%

Maximum value of SAR (measured) = 1.49 W/kg

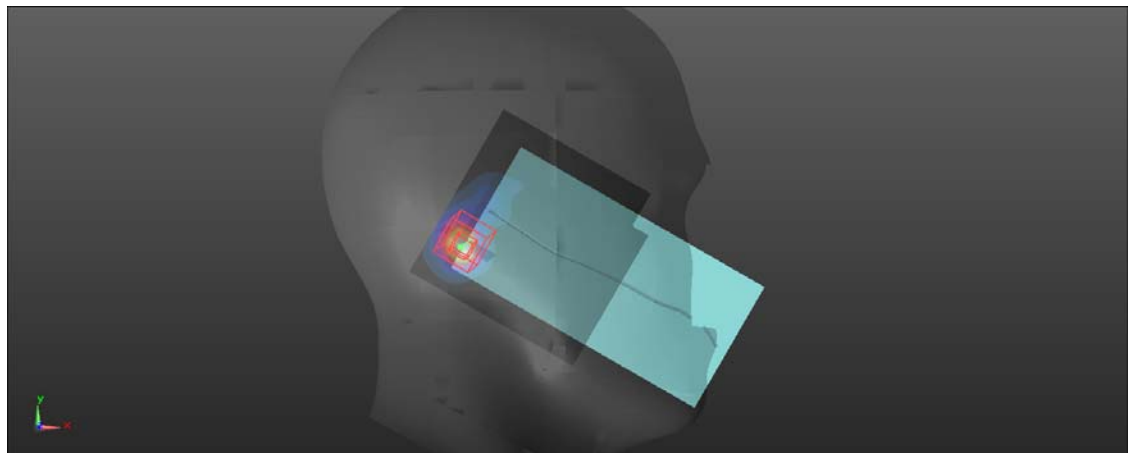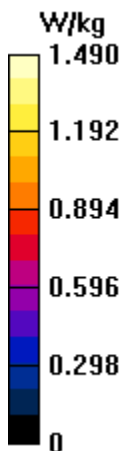

132-1_WLAN5G_802.11a 6Mbps_Right Check_Ch157

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 34.23$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.39, 4.39, 4.39) @ 5785 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch157/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.72 W/kg

Ch157/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 6.155 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 2.92 W/kg

SAR(1 g) = 0.789 W/kg; SAR(10 g) = 0.238 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 67.8%

Maximum value of SAR (measured) = 1.86 W/kg

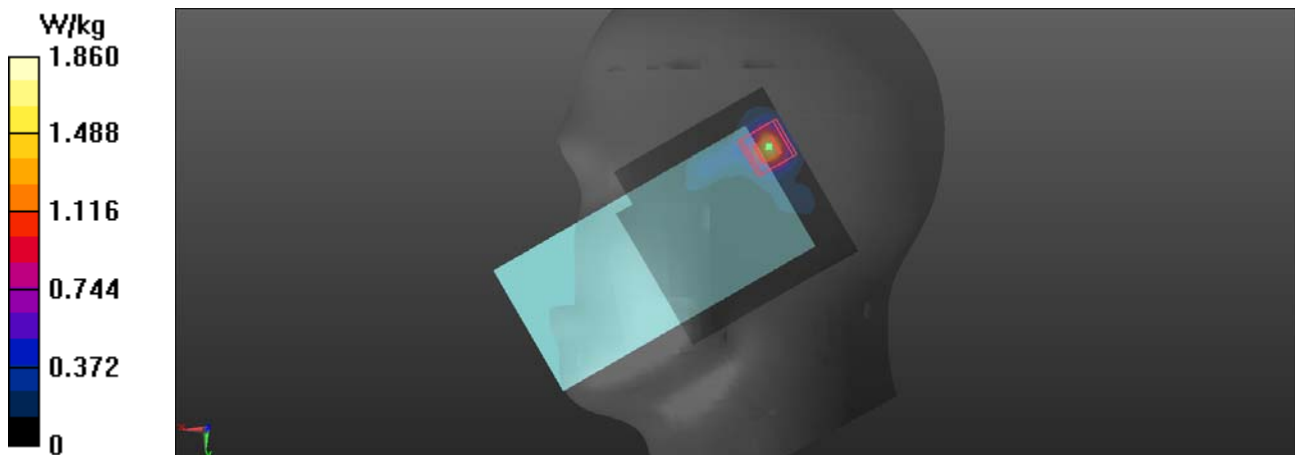

133-1_WLAN5G_802.11a 6Mbps_Right Tilt_Ch157

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 34.23$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.39, 4.39, 4.39) @ 5785 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch157/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.66 W/kg

Ch157/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 6.719 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 2.59 W/kg

SAR(1 g) = 0.720 W/kg; SAR(10 g) = 0.225 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 67.4%

Maximum value of SAR (measured) = 1.75 W/kg

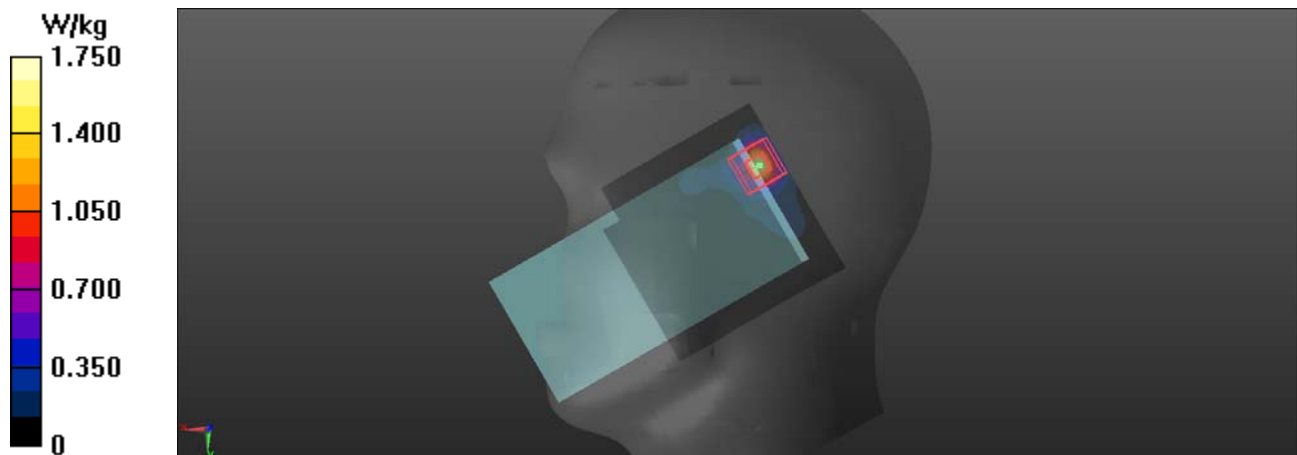

326-1_WLAN5G_802.11a 6Mbps_Body Front_Ch157

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 34.23$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.39, 4.39, 4.39) @ 5785 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch157/Area Scan (101x111x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.386 W/kg

Ch157/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.037 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.595 W/kg

SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.070 W/kg

Smallest distance from peaks to all points 3 dB below = 11.8 mm

Ratio of SAR at M2 to SAR at M1 = 65.6%

Maximum value of SAR (measured) = 0.383 W/kg

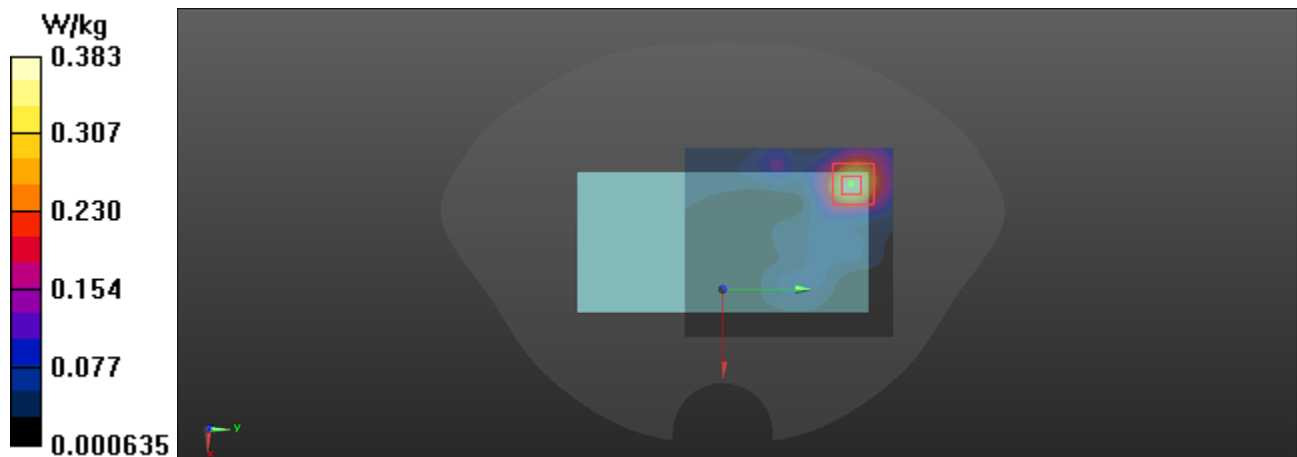

327-1_WLAN5G_802.11a 6Mbps_Body Back_Ch157

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 34.23$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.39, 4.39, 4.39) @ 5785 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch157/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.478 W/kg

Ch157/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.307 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.701 W/kg

SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.081 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 66.5%

Maximum value of SAR (measured) = 0.461 W/kg

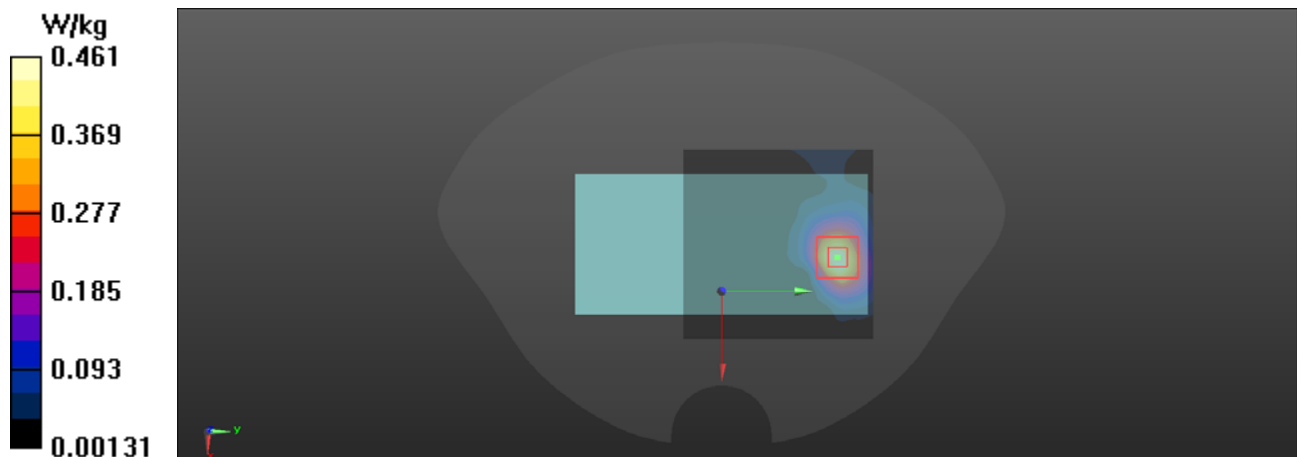

328-1_WLAN5G_802.11a 6Mbps_Body Left_Ch157

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 34.23$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.39, 4.39, 4.39) @ 5785 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch157/Area Scan (51x11x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.179 W/kg

Ch157/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.432 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 0.269 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.037 W/kg

Smallest distance from peaks to all points 3 dB below = 12 mm

Ratio of SAR at M2 to SAR at M1 = 66.6%

Maximum value of SAR (measured) = 0.175 W/kg

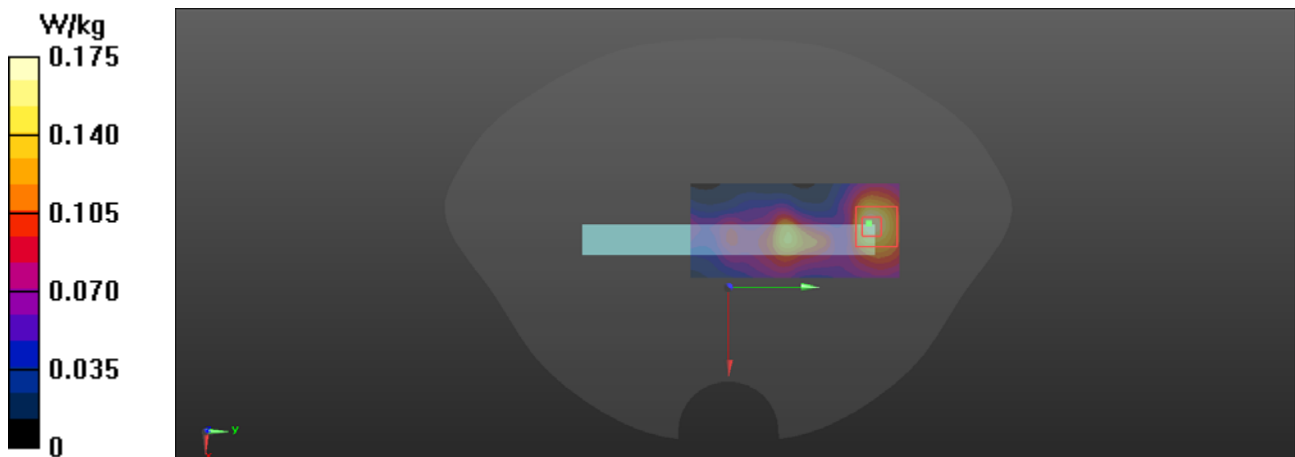

329-1_WLAN5G_802.11a 6Mbps_Body Right_Ch157

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 34.23$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.39, 4.39, 4.39) @ 5785 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch157/Area Scan (51x11x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0886 W/kg

Ch157/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.4520 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.154 W/kg

SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.021 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 71.2%

Maximum value of SAR (measured) = 0.0923 W/kg

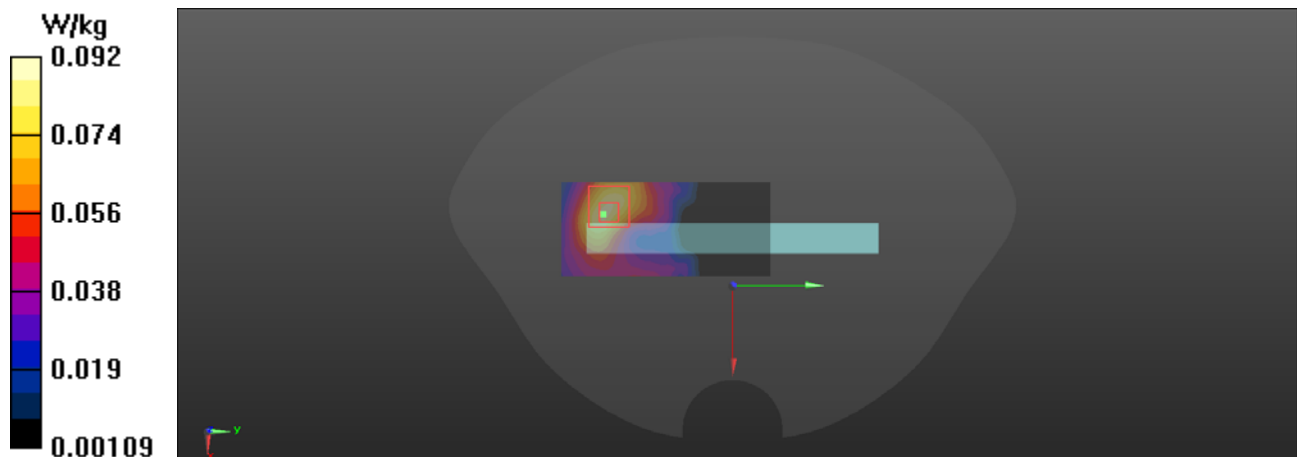

330-1_WLAN5G_802.11a 6Mbps_Body Top_Ch157

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5785 MHz;Duty Cycle: 1:1


Medium: HSL_5000 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 34.23$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.39, 4.39, 4.39) @ 5785 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Ch157/Area Scan (41x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.320 W/kg

Ch157/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 7.034 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 0.498 W/kg
SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.062 W/kg
Smallest distance from peaks to all points 3 dB below = 10.7 mm
Ratio of SAR at M2 to SAR at M1 = 66.2%
Maximum value of SAR (measured) = 0.323 W/kg

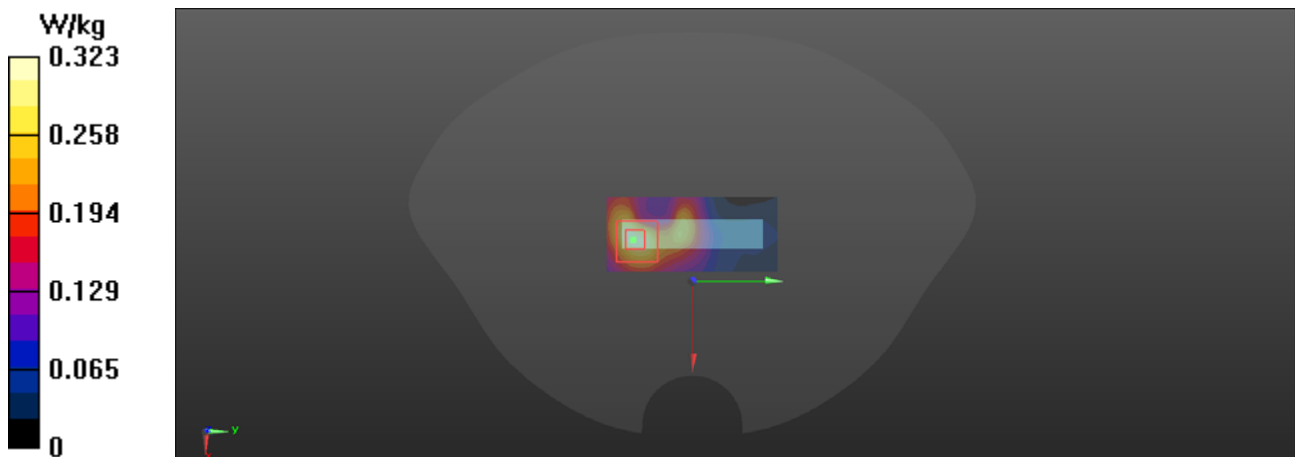

331-1_WLAN5G_802.11a 6Mbps_Body Top_Ch157

DUT: T5810

Communication System: UID 0, WIFI (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 34.23$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.39, 4.39, 4.39) @ 5785 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch157/Area Scan (41x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.22 W/kg

Ch157/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 11.35 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 0.503 W/kg; SAR(10 g) = 0.177 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 64.6%

Maximum value of SAR (measured) = 1.22 W/kg

