

SAR EVALUATION REPORT

For

Shanghai Sunmi Technology Co.,Ltd.

Room 505, KIC Plaza, No.388 Song Hu Road, Yang Pu District, Shanghai, China

FCC ID: 2AH25T5940

Report Type: CIIPC report		Product Type: Wireless data POS System	
Project Engineer:	Bard Liu		
Report Number:	RKSA240109002-20B		
Report Date:	2024-05-15		
Reviewed By:	Oscar Ye EMC Manager		
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn		

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Kunshan). This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, or any agency of the U.S.Government.

Attestation of Test Results				
EUT Information	EUT Description	Wireless data POS System		
	Tested Model	T5940		
	FCC ID	2AH25T5940		
	Serial Number	RKSA240109002-1		
	Test Date	2024-04-18~ 2024-04-25		
MODE		Max. SAR Level(s) Reported(W/kg)	Limit (W/kg)	
GSM850	1g Body SAR	0.661	1.6	
GSM1900	1g Body SAR	0.813		
WCDMA II	1g Body SAR	0.830		
WCDMA IV	1g Body SAR	1.008		
WCDMA V	1g Body SAR	0.868		
LTE Band 7	1g Body SAR	1.112		
LTE Band 12<E Band 17	1g Body SAR	0.589		
LTE Band 25<E Band 2	1g Body SAR	0.918		
LTE Band 26<E Band 5	1g Body SAR	0.580		
LTE Band 66<E Band 4	1g Body SAR	1.028		
LTE Band 40-low	1g Body SAR	1.067		
LTE Band 40-upper	1g Body SAR	1.08		
LTE Band 41	1g Body SAR	1.104		
Bluetooth	1g Body SAR	0.342		
2.4GHz WLAN	1g Body SAR	0.431		
5.2GHz WLAN	1g Body SAR	0.944		
5.8GHz WLAN	1g Body SAR	1.011		
Simultaneous	1g Body SAR	1.195		
Applicable Standards	FCC 47 CFR part 2.1093 Radiofrequency radiation exposure evaluation: portable devices			
	RF Exposure Procedures: TCB Workshop April 2019			
	IEEE 1528:2013 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques			
	KDB procedures KDB 447498 D01 General RF Exposure Guidance v06 KDB 648474 D04 Handset SAR v01r03 KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04 KDB 865664 D02 RF Exposure Reporting v01r02 KDB 941225 D01 3G SAR Procedures v03r01 KDB 941225 D05 SAR for LTE Devices v02r05 KDB 941225 D06 Hot Spot SAR v02r01 KDB 248227 D01 802.11 Wi-Fi SAR v02r02			
Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in FCC 47 CFR part 2.1093 and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures. The results and statements contained in this report pertain only to the device(s) evaluated.				

TABLE OF CONTENTS

DOCUMENT HISTORY	4
FILING DESCRIPTION	5
EUT DESCRIPTION	6
TECHNICAL SPECIFICATION	6
REFERENCE, STANDARDS, AND GUIDELINES.....	8
SAR LIMITS	8
FACILITIES.....	9
DESCRIPTION OF TEST SYSTEM	10
EQUIPMENT LIST AND CALIBRATION	17
EQUIPMENTS LIST & CALIBRATION INFORMATION	17
SAR MEASUREMENT SYSTEM VERIFICATION	18
LIQUID VERIFICATION	18
SYSTEM ACCURACY VERIFICATION.....	21
SAR SYSTEM VALIDATION DATA	22
EUT TEST STRATEGY AND METHODOLOGY	31
TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS	31
TEST DISTANCE FOR SAR EVALUATION	31
SAR EVALUATION PROCEDURE.....	32
CONDUCTED OUTPUT POWER MEASUREMENT	33
TEST PROCEDURE	33
RADIO CONFIGURATION	34
PROXIMITY SENSOR OPERATION.....	40
MAXIMUM TARGET OUTPUT POWER	48
TEST RESULTS:	52
STANDALONE SAR TEST EXCLUSION CONSIDERATIONS	118
SAR TEST EXCLUSION FOR THE EUT EDGE CONSIDERATIONS RESULT	119
SAR TEST DATA.....	122
SAR SIMULTANEOUS TRANSMISSION DESCRIPTION	136
APPENDIX A SAR PLOTS OF SAR MEASUREMENT	137
APPENDIX B MEASUREMENT UNCERTAINTY	138
APPENDIX C EUT TEST POSITION PHOTOS	140
APPENDIX D CALIBRATION CERTIFICATES	145

DOCUMENT HISTORY

Revision	Release Date	Description of Revision	Report Number
R1V1	2021-06-21	Original Report	RKSA210422002-20A
R1V2	2024-05-15	CIIPC Report	RKSA240109002-20B

FILING DESCRIPTION

Report Number	Information about Changes
RKSA210422002-20A	First Release
RKSA240109002-20B	Adapter, LCD, Stepping Motor, Scan Engine

Note:

This is a CIIPC report application based on RKSA210422002-20A, grant date: 7/20/2021, the details as below:

1. Delete an adapter: UC13US
2. Add an LCD, its model is HS55ET16T6F, the supplier is Huashi Opto-Electronic Co., Ltd. and the specification is 5.45inch.
3. Add a stepping motor, its model is 15BY25-098, the supplier is SHENZHEN YOFON ELECTRONIC CO. , LTD and the specification is 5Vdc.
4. Add a scan engine, its model is NG004, the supplier is shanghai Sunmi Technology Co.,Ltd. and the specification is 3.3Vdc.

In response to the above changes, we retested the SAR on the front and worst sides. The frequency band of sensor reduce power is several more (WCDMA 5/LTE Band 12&17/LTE Band26&5) , so we re-tested it

EUT DESCRIPTION

**All measurement and test data in this report was gathered from production sample serial number: RKSA240109002-1(Assigned by BACL, Kunshan).The EUT supplied by the applicant was received on 2024-01-09.*

Technical Specification

Device Type:	portable
Exposure Category:	Population / Uncontrolled
Antenna Type(s):	FPC Antenna
Body-Worn Accessories:	None
Face-Head Accessories:	None
Operation Mode :	GPRS/EGPRS WCDMA FDD-LTE/ TDD-LTE WLAN2.4G/WLAN 5G Bluetooth NFC
Frequency Band:	GSM 850: 824-849 MHz(TX), 869-894 MHz(RX) GSM1900: 1850-1910MHz(TX), 1930-1990MHz(RX) WCDMA Band II: 1850-1910 MHz MHz(TX), 1930-1990 MHz(RX) WCDMA Band IV: 1710-1755 MHz(TX), 2110-2155MHz(RX) WCDMA Band V: 824-849 MHz(TX), 869-894 MHz(RX) LTE Band 2: 1850-1910 MHz(TX), 1930-1990MHz(RX) LTE Band 4: 1710-1755 MHz(TX), 2110-2155MHz(RX) LTE Band 5: 824-849 MHz(TX), 869-894 MHz(RX) LTE Band 7: 2500-2570 MHz(TX), 2620-2690 MHz(RX) LTE Band 12: 699-716 MHz(TX), 729-746 MHz(RX) LTE Band 17: 704-716 MHz(TX), 734-746 MHz(RX) LTE Band 25: 1850-1915 MHz(TX), 1930-1995 MHz(RX) LTE Band 26: 814-849 MHz(TX), 859-894 MHz(RX) LTE Band 40 Lower: 2305-2315 MHz(TX), 2305-2315 MHz(RX) LTE Band 40 Upper: 2350-2360 MHz(TX), 2350-2360 MHz(RX) LTE Band 41: 2555-2655 MHz(TX), 2555-2655 MHz(RX) LTE Band 66: 1710-1780 MHz(TX), 2110-2200 MHz(RX) 2.4G Wi-Fi: 2412-2462 MHz(802.11b/g/n20), 2422-2452 MHz(802.11n40) BT/BLE(1Mbps)/BLE(2Mbps): 2402-2480 MHz 5G WIFI Band 1: 5150~5250 MHz, Band 4: 5725~5850 MHz NFC:13.56MHz
Conducted RF Power:	GSM850: 33.98dBm GSM1900:29.45dBm WCDMA Band II: 22.19 dBm; WCDMA Band IV: 22.34 dBm WCDMA Band V: 22.16 dBm LTE Band 2: 22.26 dBm; LTE Band 4: 22.21 dBm LTE Band 5: 22.25 dBm;LTE Band 7: 22.21 dBm LTE Band 12: 22.24 dBm; LTE Band 17: 22.31 dBm LTE Band 25: 22.25 dBm; LTE Band 26: 22.26 dBm LTE Band 40-low: 22.16 dBm; LTE Band 40-up: 22.25 dBm LTE Band 41: 22.30 dBm LTE Band 66: 22.35 dBm; WLAN 2.4G: 16.92 dBm WLAN 5.2G: 11.56 dBm WLAN 5.8G :13.30 dBm Bluetooth(BDR/EDR); 9.91 dBm; BLE:-2.37 dBm

Power Source:	DC 7.7 V from battery
Normal Operation:	Body Supported
★Maximum Antenna Gain:	GPRS/EGPRS 850: 0.07 dBi GPRS/EGPRS 1900: 2.0 dBi WCDMA Band II: 2.0 dBi WCDMA Band IV: 1.15 dBi WCDMA Band V: 0.07 dBi LTE Band 2: 2.0 dBi LTE Band 4: 1.15 dBi LTE Band 5: 0.07 dBi LTE Band 7: 0.42 dBi LTE Band 12: 2.0 dBi LTE Band 17: 2.0 dBi LTE Band 25: 2.0 dBi LTE Band 26: 2.0 dBi LTE Band 40: 2.0 dBi LTE Band 41: 2.0 dBi LTE Band 66: 1.15 dBi 2.4G Wi-Fi/BLE/BT: 2.0 dBi 5.2Gwifi/5.8Gwifi; 2.0 dBi

*Adapter Information:**Model: TPA-23A050200UU01**Input: AC100-240V 50/60Hz 0.3A**Output: 5.0V, 2000mA**Note: The maximum antenna gain was declared by the manufacturer.*

REFERENCE, STANDARDS, AND GUIDELINES

FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

SAR Limits

FCC Limit

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).


General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg for 1g Body SAR applied to the EUT.

FACILITIES


The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) is accredited in accordance with ISO/IEC 17025:2017 by NVLAP (Lab code: 600338-0), and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No. : CN5055.

These measurements were performed with the automated near-field scanning system DASY6 from Schmid & Partner Engineering AG (SPEAG) which is the Fifth generation of the system shown in the figure hereinafter:

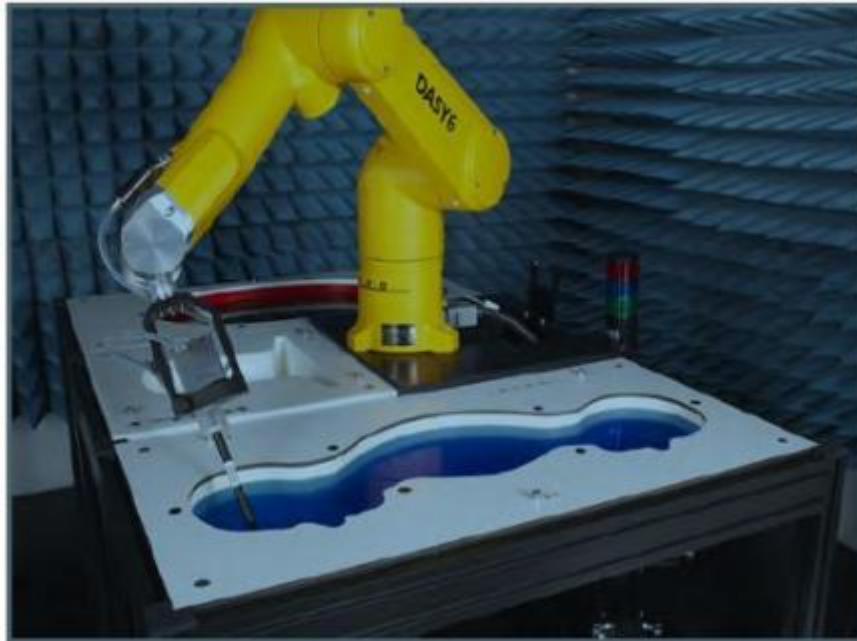

The DASY6 system for performing compliance tests consists of the following items:

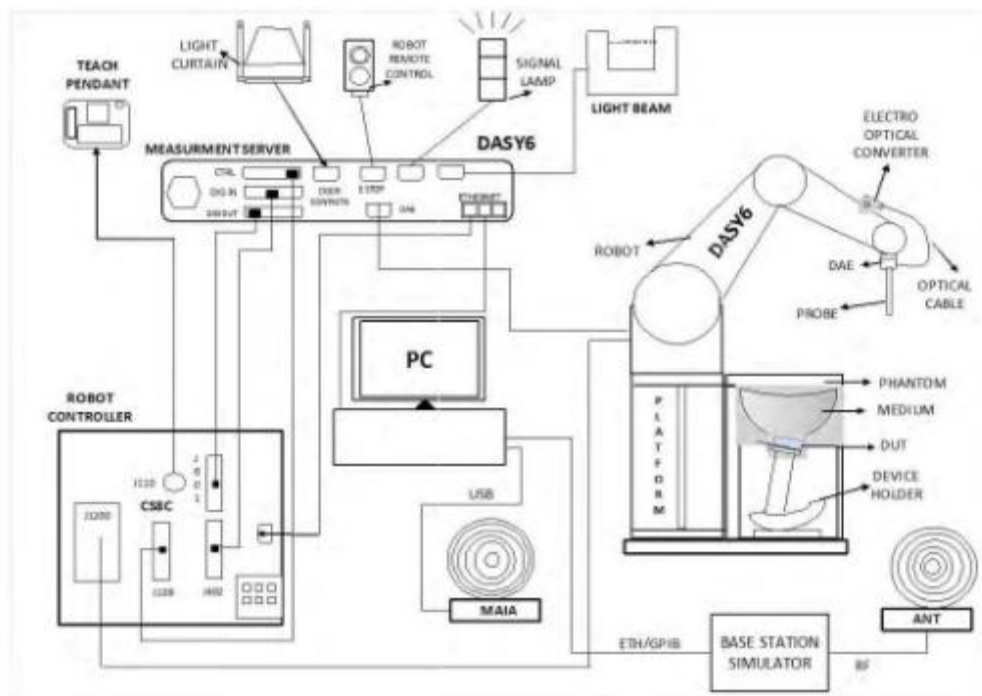

- A standard high precision 6-axis robot (Staubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal application, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

DASY6 Measurement Server

The DASY6 measurement server is based on a PC/104 CPU board with a 400 MHz Intel ULV Celeron, 128 MB chip-disk and 128 MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16-bit AD converter system for optical detection and digital I/O interface are contained on the DASY6 I/O board, which is directly connected to the PC/104 bus of the CPU board.



The measurement server performs all real-time data evaluations of field measurements and surface detection, controls robot movements, and handles safety operations. The PC operating system cannot interfere with these time-critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program- controlled robot movements. Furthermore, the measurement server is equipped with an expansion port, which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Connection of devices from any other supplier could seriously damage the measurement server.

Data Acquisition Electronics

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

EX3DV4 E-Field Probes

Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (Tip: 9 mm) Tip diameter: 2.5 mm (Body: 10 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI

SAM Twin Phantom

The SAM Twin Phantom (shown in front of DASY6) is a fiberglass shell phantom with shell thickness 2 mm, except in the ear region where the thickness is increased to 6 mm. The phantom has three measurement areas: 1) Left Head, 2) Right Head, and 3) Flat Section. For larger devices, the use of the ELI-Phantom (shown behind DASY6) is required. For devices such as glasses with a wireless link, the Face Down Phantom is the most suitable (between the SAM Twin and ELI phantoms).

When the phantom is mounted inside allocated slot of the DASY6 platform, phantom reference points can be taught directly in the DASY5 V5.2 software. When the DASY6 platform is used to mount the Phantom, some of the phantom teaching points cannot be reached by the robot in DASY5 V5.2. A special tool called P1a-P2aX-Former is provided to transform two of the three points, P1 and P2, to reachable locations. To use these new teaching points, a revised phantom configuration file is required.


In addition to our standard broadband liquids, the phantom can be used with the following tissue simulating liquids:

Sugar-water-based liquids can be left permanently in the phantom. Always cover the liquid when the system is not in use to prevent changes in liquid parameters due to water evaporation.

DGBE-based liquids should be used with care. As DGBE is a softener for most plastics, the liquid should be taken out of the phantom, and the phantom should be dried when the system is not in use (desirable at least once a week).

Do not use other organic solvents without previously testing the solvent resistivity of the phantom.

Approximately 25 liters of liquid is required to fill the SAM Twin phantom.

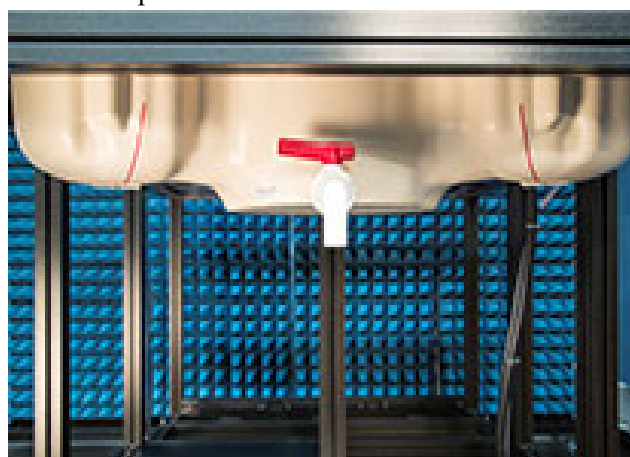


ELI Phantom

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6 GHz. ELI is fully compatible with the latest draft of the standard IEC 62209-2 and the use of all known tissue simulating liquids. ELI has been optimized for performance and can be integrated into a SPEAG standard phantom table. A cover is provided to prevent evaporation of water and changes in liquid parameters. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points.

The phantom can be used with the following tissue simulating liquids:

- Sugar-water-based liquids can be left permanently in the phantom. Always cover the liquid when the system is not in use to prevent changes in liquid parameters due to water evaporation.
- DGBE-based liquids should be used with care. As DGBE is a softener for most plastics, the liquid should be taken out of the phantom, and the phantom should be dried when the system is not in use (desirable at least once a week).
- Do not use other organic solvents without previously testing the solvent resistivity of the phantom.

Approximately 25 liters of liquid is required to fill the ELI phantom.

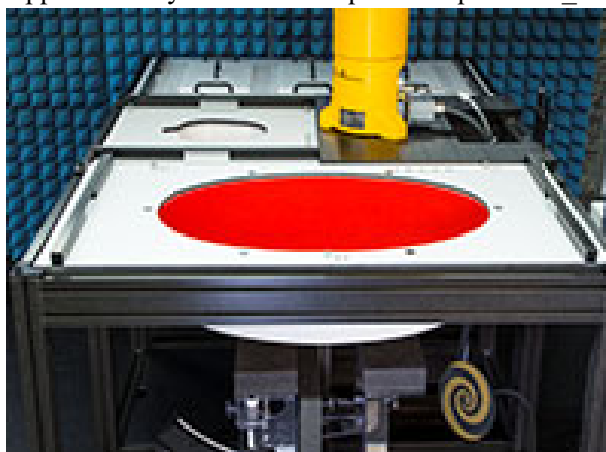

Robots

The DASY6 system uses the high-precision industrial robots TX60L, TX90XL, and RX160L from Staubli SA (France). The TX robot family - the successor of the well-known RX robot family - continues to offer the features important for DASY6 applications:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchrony motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)

The robots are controlled by the Staubli CS8c robot controllers. All information regarding the use and maintenance of the robot arm and the robot controller is provided

Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 15mm 2 step integral, with 1.5mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the DASY5 software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 10mm, with the side length of the 10g cube is 21.5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 7 x 7 x 7 (5mmx5mmx5mm) providing a volume of 30 mm in the X & Y & Z axis.

Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEC 62209-1:2016

Recommended Tissue Dielectric Parameters for Head liquid

Table A.3 – Dielectric properties of the head tissue-equivalent liquid

Frequency MHz	Relative permittivity ϵ_r	Conductivity (σ) S/m
300	45,3	0,87
450	43,5	0,87
750	41,9	0,89
835	41,5	0,90
900	41,5	0,97
1 450	40,5	1,20
1 500	40,4	1,23
1 640	40,2	1,31
1 750	40,1	1,37
1 800	40,0	1,40
1 900	40,0	1,40
2 000	40,0	1,40
2 100	39,8	1,49
2 300	39,5	1,67
2 450	39,2	1,80
2 600	39,0	1,96
3 000	38,5	2,40
3 500	37,9	2,91
4 000	37,4	3,43
4 500	36,8	3,94
5 000	36,2	4,45
5 200	36,0	4,66
5 400	35,8	4,86
5 600	35,5	5,07
5 800	35,3	5,27
6 000	35,1	5,48

NOTE For convenience, permittivity and conductivity values at those frequencies which are not part of the original data provided by Drossos et al. [33] or the extension to 5 800 MHz are provided (i.e. the values shown *in italics*). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6 000 MHz that were linearly extrapolated from the values at 3 000 MHz and 5 800 MHz.

Note:


- 1, Effective February 19, 2019, FCC has permitted the use of single head-tissue simulating liquid specified in IEC 62209-1 for all SAR tests.
- 2, Mix and Match of traditional FCC SAR TSLs and IEC 62209-1 TSL in a single application is not permitted TSL can be changed in a Permissive Change.
- 3, If SAR increases and original SAR > 1.2 W/kg, additional SAR measurements will be required IEC 62209-1 TSL is an alternative, not mandatory at this time.
- 4, If FCC parameters are used, $\pm 5\%$ tolerance. If IEC parameters, $\pm 10\%$.
- 5, In this case, IEC parameters applied.

EQUIPMENT LIST AND CALIBRATION**Equipments List & Calibration Information**

Equipment	Model	S/N	Calibration Date	Calibration Due Date
DASY5 Test Software	DASY52 52.10.2	N/A	N/A	N/A
DASY6 Measurement Server	DASY6 6.0.31	N/A	N/A	N/A
Data Acquisition Electronics	DAE4	527	2024/03/26	2025/03/25
E-Field Probe	EX3DV4	7557	2024/03/26	2025/03/25
Mounting Device	MD4HHTV5	SD 000 H01 KA	N/A	N/A
ELI V8.0 Phantom	QD OVA 004 Ax	2095	N/A	N/A
Dipole, 750MHz	D750V3	1166	2021/08/31	2024/08/30
Dipole, 835MHz	D835V2	445	2023/02/10	2026/02/09
Dipole,1750MHz	D1750V2	1140	2021/06/29	2024/06/28
Dipole,1900MHz	D1900V2	5d206	2021/09/01	2024/08/31
Dipole,2300MHz	D2300V2	1098	2022/08/23	2025/08/22
Dipole,2450MHz	D2450V2	970	2021/06/28	2024/06/27
Dipole,2600MHz	D2600V2	1162	2022/08/22	2025/08/21
Dipole,5GHz	D5GHzV2	1296	2022/08/17	2025/08/16
Simulated Tissue LiquidHead	HBBL600-6000V6	180611-3	Each Time	
Network Analyzer	E5071B	SG42400155	2023/05/23	2024/05/22
Dielectric Assessment Kit	DAK-3.5	SM DAK 300AB	N/A	N/A
Signal Generator	N5182B	MY53051592	2023/05/23	2024/05/22
Power Amplifier	5S1G4	71377	N/A	N/A
Directional Coupler	4242-10	3307	N/A	N/A
Attenuator	3dB	5402	N/A	N/A
Attenuator	10dB	AU 3842	N/A	N/A
Radio Communication Analyzer	MT8820C	6200930956	2023/06/15	2024/06/14
Hygrothermograph	HTC-1	N/A	2023/5/22	2024/5/21
Thermometer	UL-IL01	N/A	2023/5/22	2024/5/21
Power Meter	E4419B	MY41291878	2023/05/23	2024/05/22

SAR MEASUREMENT SYSTEM VERIFICATION

Liquid Verification

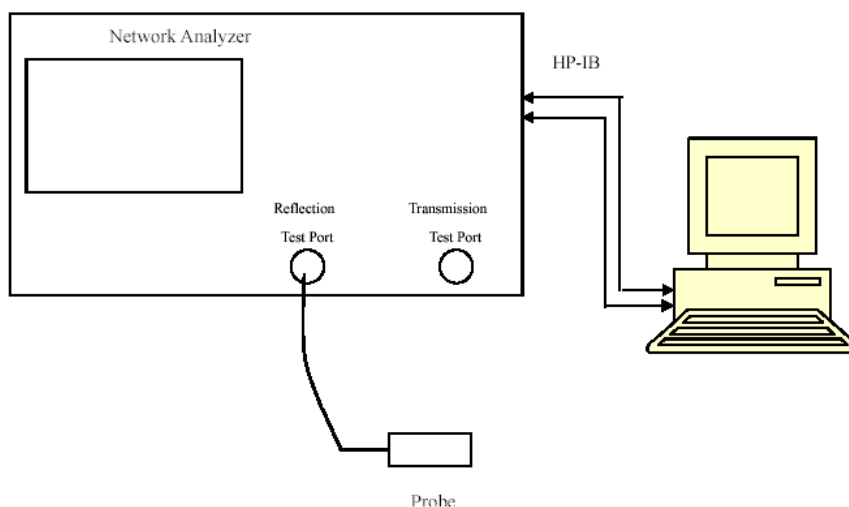

Liquid Verification Setup Block Diagram

Liquid Verification Results

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	$\Delta \sigma$	$\Delta \epsilon_r$	
750	Head	0.900	41.707	0.890	41.900	1.12	-0.46	± 5
707.5	Head	0.858	42.200	0.887	42.112	-3.27	0.21	± 5
704	Head	0.855	42.248	0.887	42.133	-3.61	0.27	± 5
711	Head	0.862	42.161	0.887	42.097	-2.82	0.15	± 5

*Liquid Verification above was performed on 2024/04/18.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	$\Delta \sigma$	$\Delta \epsilon_r$	
835	Head	0.925	42.273	0.900	41.500	2.78	1.86	± 5
824.2	Head	0.914	42.401	0.898	41.512	1.78	2.14	± 5
848.8	Head	0.938	42.106	0.909	41.500	3.19	1.46	± 5
836.6	Head	0.927	42.253	0.901	41.500	2.89	1.81	± 5
826.4	Head	0.916	42.384	0.898	41.508	2.00	2.11	± 5
846.6	Head	0.936	42.120	0.907	41.500	3.20	1.49	± 5
831.5	Head	0.921	42.317	0.899	41.501	2.45	1.97	± 5
821.5	Head	0.911	42.435	0.897	41.517	1.56	2.21	± 5
841.5	Head	0.932	42.195	0.903	41.500	3.21	1.67	± 5

*Liquid Verification above was performed on 2024/04/19.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		O (S/m)	ϵ_r	O (S/m)	ϵ_r	ΔO	$\Delta \epsilon_r$	
1750	Head	1.368	39.457	1.370	40.100	-0.15	-1.60	± 5
1745	Head	1.363	39.479	1.384	40.046	-1.52	-1.42	± 5
1720	Head	1.337	39.583	1.369	40.089	-2.34	-1.26	± 5
1770	Head	1.387	39.375	1.395	40.015	-0.57	-1.60	± 5
1732.6	Head	1.351	39.531	1.377	40.069	-1.89	-1.34	± 5
1712.4	Head	1.33	39.618	1.364	40.104	-2.49	-1.21	± 5
1752.6	Head	1.371	39.449	1.388	40.034	-1.22	-1.46	± 5

*Liquid Verification above was performed on 2024/04/20.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		O (S/m)	ϵ_r	O (S/m)	ϵ_r	ΔO	$\Delta \epsilon_r$	
1900	Head	1.422	39.142	1.400	40.000	1.57	-2.14	± 5
1880	Head	1.402	39.232	1.400	40.000	0.14	-1.92	± 5
1850.2	Head	1.372	39.367	1.400	40.000	-2.00	-1.58	± 5
1909.8	Head	1.433	39.104	1.400	40.000	2.36	-2.24	± 5
1852.4	Head	1.375	39.358	1.400	40.000	-1.79	-1.61	± 5
1907.6	Head	1.431	39.113	1.400	40.000	2.21	-2.22	± 5
1860	Head	1.382	39.328	1.400	40.000	-1.29	-1.68	± 5
1905	Head	1.428	39.122	1.400	40.000	2.00	-2.20	± 5

*Liquid Verification above was performed on 2024/04/21

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		O (S/m)	ϵ_r	O (S/m)	ϵ_r	ΔO	$\Delta \epsilon_r$	
2300	Head	1.706	38.791	1.670	39.500	2.16	-1.79	± 5
2310	Head	1.718	38.746	1.67	39.42	2.87	-1.71	± 5
2355	Head	1.769	38.558	1.71	39.35	3.45	-2.01	± 5

*Liquid Verification above was performed on 2024/04/22

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		O (S/m)	ϵ_r	O (S/m)	ϵ_r	ΔO	$\Delta \epsilon_r$	
2450	Head	1.846	39.167	1.800	39.200	2.56	-0.08	± 5
2437	Head	1.832	39.220	1.788	39.219	2.46	0.00	± 5
2412	Head	1.802	39.313	1.765	39.256	2.10	0.15	± 5
2462	Head	1.859	39.115	1.812	39.183	2.59	-0.17	± 5
2441	Head	1.836	39.205	1.79	39.21	2.57	-0.01	± 5
2402	Head	1.791	39.353	1.76	39.27	1.76	0.21	± 5
2480	Head	1.881	39.041	1.83	39.16	2.79	-0.30	± 5
2535	Head	1.946	38.832	1.888	39.084	3.07	-0.64	± 5
2510	Head	1.915	38.932	1.861	39.117	2.90	-0.47	± 5

*Liquid Verification above was performed on 2024/04/23

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		O (S/m)	ϵ_r	O (S/m)	ϵ_r	ΔO	$\Delta \epsilon_r$	
2600	Head	2.046	37.501	1.960	39.000	4.39	-3.84	± 5
2560	Head	1.998	37.666	1.916	39.051	4.28	-3.55	± 5
2605	Head	2.051	37.485	1.97	38.99	4.32	-3.87	± 5
2565	Head	2.004	37.642	1.92	39.04	4.32	-3.59	± 5
2580	Head	2.022	37.577	1.938	39.025	4.33	-3.71	± 5
2645	Head	2.097	37.322	2.01	38.94	4.38	-4.16	± 5

*Liquid Verification above was performed on 2024/04/24

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		O (S/m)	ϵ_r	O (S/m)	ϵ_r	ΔO	$\Delta \epsilon_r$	
5250	Head	4.906	37.378	4.710	35.900	4.16	4.12	± 5
5200	Head	4.849	37.452	4.660	36.000	4.06	4.03	± 5
5180	Head	4.827	37.480	4.639	36.020	4.05	4.05	± 5
5240	Head	4.895	37.378	4.701	35.960	4.13	3.94	± 5

*Liquid Verification above was performed on 2024/04/25

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		O (S/m)	ϵ_r	O (S/m)	ϵ_r	ΔO	$\Delta \epsilon_r$	
5750	Head	5.465	36.558	5.220	35.400	4.69	3.27	± 5
5785	Head	5.476	36.583	5.255	35.315	4.21	3.59	± 5
5745	Head	5.428	36.627	5.215	35.355	4.08	3.60	± 5
5825	Head	5.516	36.511	5.296	35.275	4.15	3.50	± 5

*Liquid Verification above was performed on 2024/04/25


System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The spacing distances in the **System Verification Setup Block Diagram** is given by the following:

- $s = 15 \text{ mm} \pm 0,2 \text{ mm}$ for $300 \text{ MHz} \leq f \leq 1\,000 \text{ MHz}$;
- $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $1\,000 \text{ MHz} < f \leq 3\,000 \text{ MHz}$;
- $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $3\,000 \text{ MHz} < f \leq 6\,000 \text{ MHz}$.

System Verification Setup Block Diagram

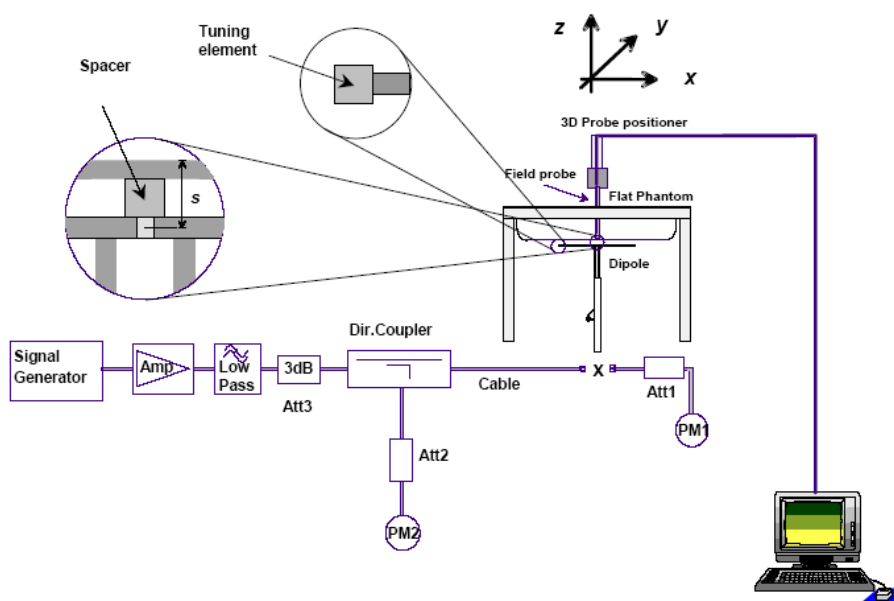

System Accuracy Check Results

Date	Frequency Band	Liquid Type	Input Power (mW)	Measured SAR (W/kg)		Normalized to 1W (W/kg)	Target Value (W/kg)	Delta (%)	Tolerance (%)
2024/04/18	750MHz	Head	250	1g	2.18	8.72	8.52	2.35	± 10
2024/04/19	835 MHz	Head	250	1g	2.43	9.72	9.53	1.99	± 10
2024/04/20	1750 MHz	Head	250	1g	9.65	38.6	35.90	7.52	± 10
2024/04/21	1900MHz	Head	250	1g	10.50	42	39.60	6.06	± 10
2024/04/22	2300MHz	Head	250	1g	11.9	47.6	49.50	-3.84	± 10
2024/04/23	2450 MHz	Head	250	1g	14.00	56	53.10	5.46	± 10
2024/04/24	2600 MHz	Head	250	1g	14.00	56	54.90	2.00	± 10
2024/04/25	5250 MHz	Head	100	1g	7.42	74.2	79.40	-6.55	± 10
2024/04/25	5750 MHz	Head	100	1g	7.63	76.3	79.00	-3.42	± 10

*The SAR values above are normalized to 1 Watt forward power.

SAR SYSTEM VALIDATION DATA

System Check_Head_750MHz

DUT: Dipole 750 MHz D750V3; Type: D750V3; Serial: D750V3 - SN:1166

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 750$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 41.707$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(10.27, 10.27, 10.27); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Pin=250mW/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.19 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 53.32 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 3.18 W/kg

SAR(1 g) = 2.18 W/kg; SAR(10 g) = 1.45 W/kg

Maximum value of SAR (measured) = 2.52 W/kg

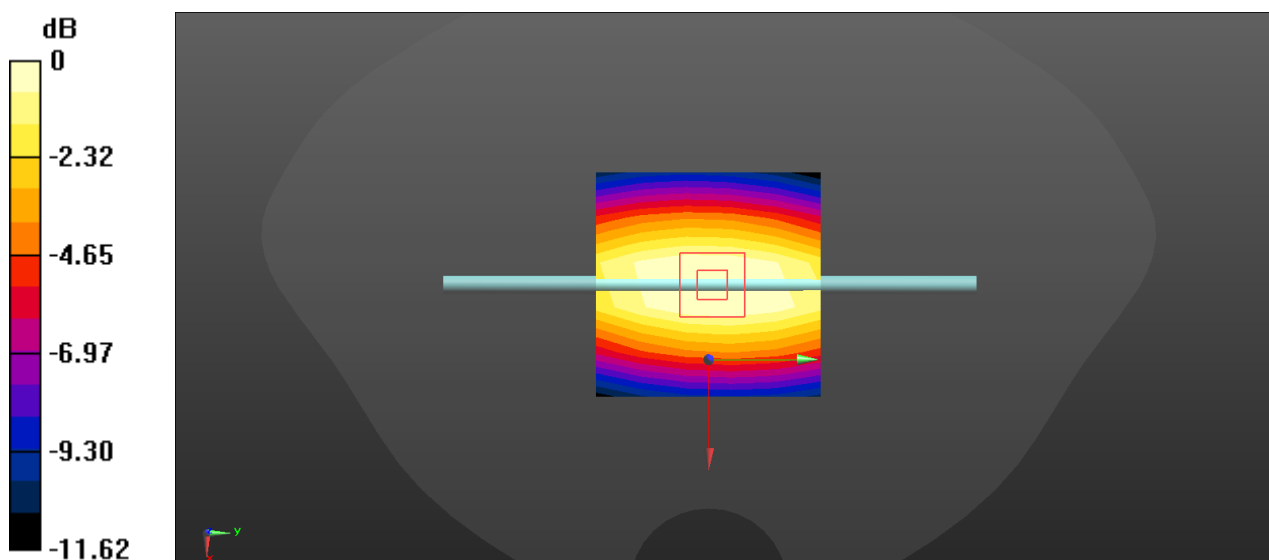

$$0 \text{ dB} = 2.52 \text{ W/kg} = 4.01 \text{ dBW/kg}$$

System Check_Head_835MHz

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:445

Communication System: UID 0, CW (0); Frequency: 835 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 42.273$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(9.88, 9.88, 9.88); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Pin=250mW/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.53 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 56.12 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 3.58 W/kg

SAR(1 g) = 2.43 W/kg; SAR(10 g) = 1.6 W/kg

Maximum value of SAR (measured) = 2.84 W/kg

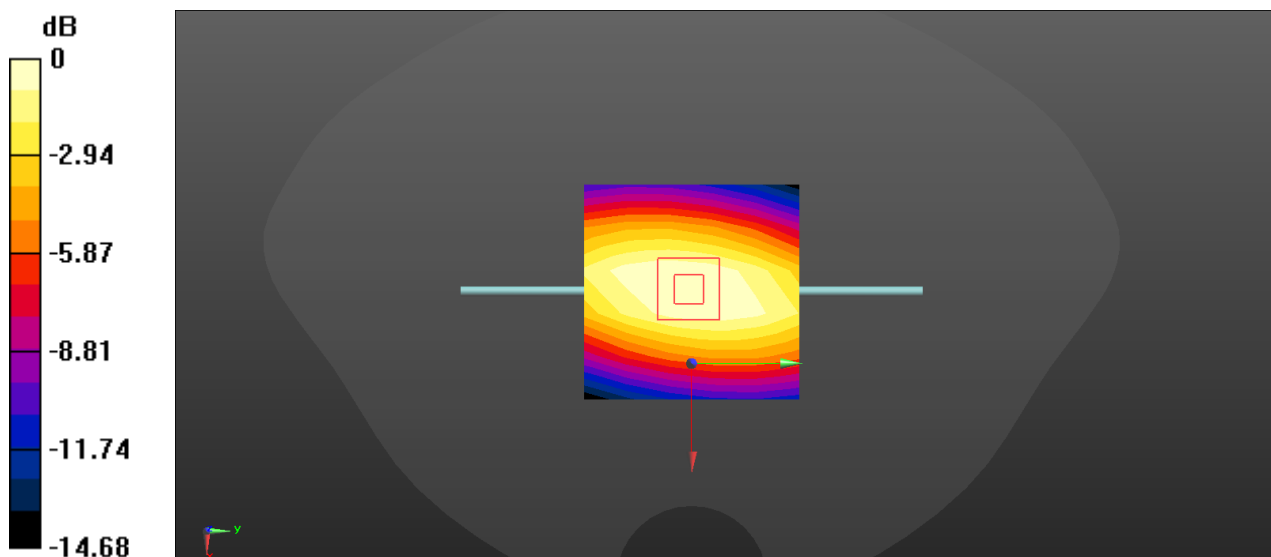

$$0 \text{ dB} = 2.84 \text{ W/kg} = 4.53 \text{ dBW/kg}$$

System Check_Head_1750MHz

DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN:1140

Communication System: UID 0, CW (0); Frequency: 1750 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 39.457$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(8.28, 8.28, 8.28); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 12.8 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 97.35 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 18.2 W/kg

SAR(1 g) = 9.65 W/kg; SAR(10 g) = 5.02 W/kg

Maximum value of SAR (measured) = 12.6 W/kg

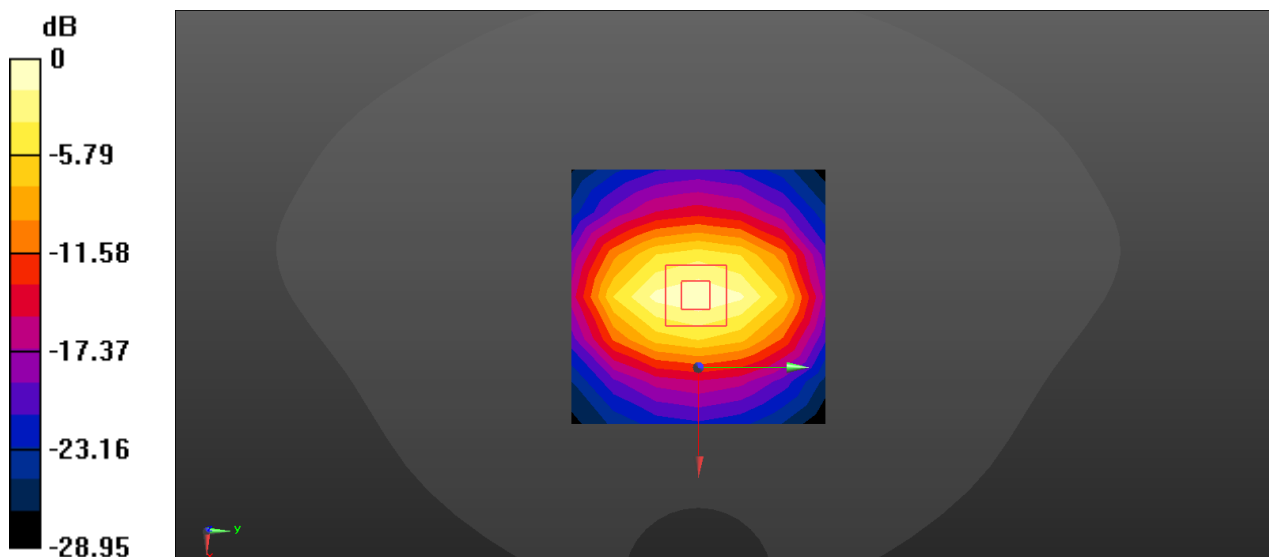

$$0 \text{ dB} = 12.8 \text{ W/kg} = 11.07 \text{ dBW/kg}$$

System Check_Head_1900MHz

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d206

Communication System: UID 0, CW (0); Frequency: 1900 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.422$ S/m; $\epsilon_r = 39.142$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.92, 7.92, 7.92); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Pin=250mW/Area Scan (7x7x1); Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 12.6 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 95.08 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 19.6 W/kg

SAR(1 g) = 10.5 W/kg; SAR(10 g) = 5.45 W/kg

Maximum value of SAR (measured) = 13.2 W/kg

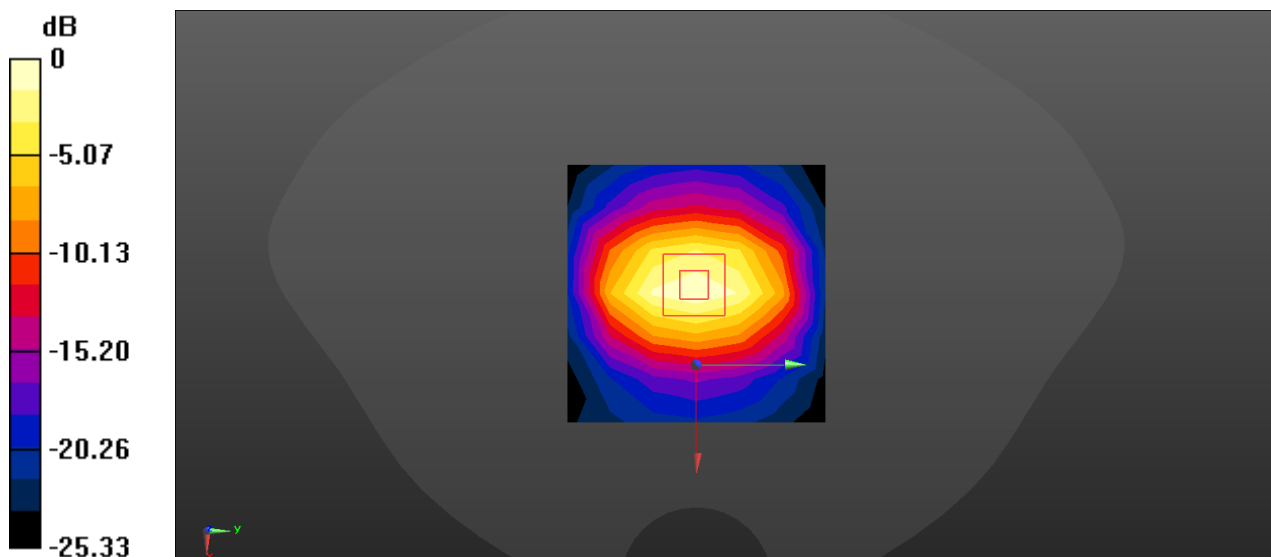

$$0 \text{ dB} = 13.2 \text{ W/kg} = 11.21 \text{ dBW/kg}$$

System Check_Head_2300MHz

DUT: D2300V2-1098; Type: D2300V2; Serial: D2300V2 - SN:1098

Communication System: UID 0, CW (0); Frequency: 2300 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2300$ MHz; $\sigma = 1.706$ S/m; $\epsilon_r = 38.791$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.6, 7.6, 7.6); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Pin=250mW/Area Scan (7x7x1); Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 13.7 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.27 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 20.4 W/kg

SAR(1 g) = 11.9 W/kg; SAR(10 g) = 5.43 W/kg

Maximum value of SAR (measured) = 14.0 W/kg

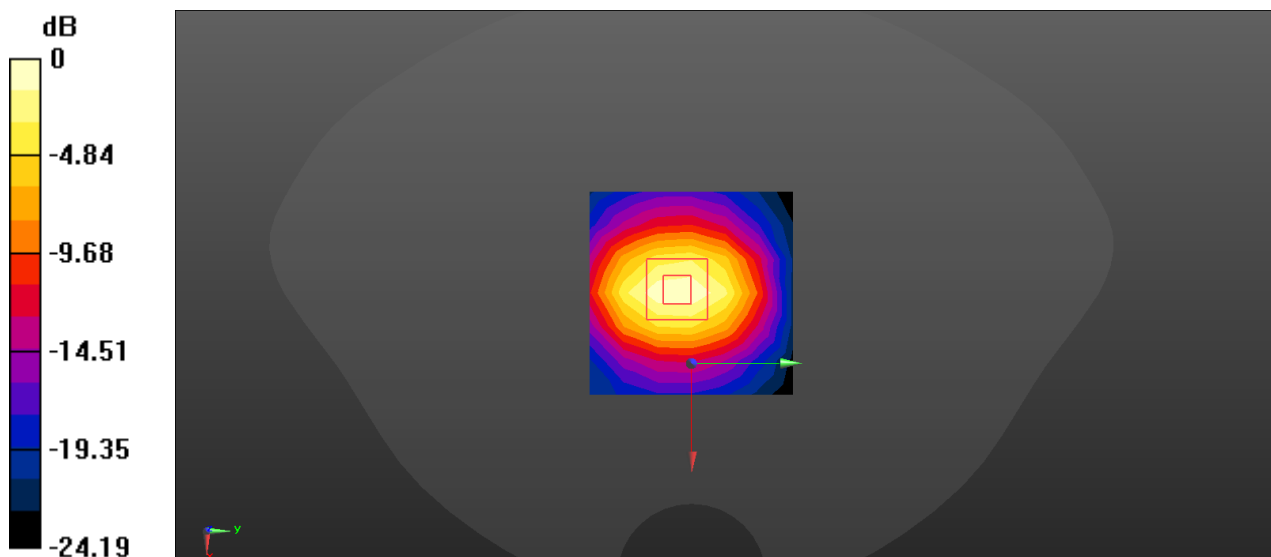

$$0 \text{ dB} = 14.0 \text{ W/kg} = 11.46 \text{ dBW/kg}$$

System Check_Head_2450MHz

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:970

Communication System: UID 0, CW (0); Frequency: 2450 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.846$ S/m; $\epsilon_r = 39.167$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 17.3 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.16 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 27.9 W/kg

SAR(1 g) = 14 W/kg; SAR(10 g) = 6.47 W/kg

Maximum value of SAR (measured) = 18.2 W/kg

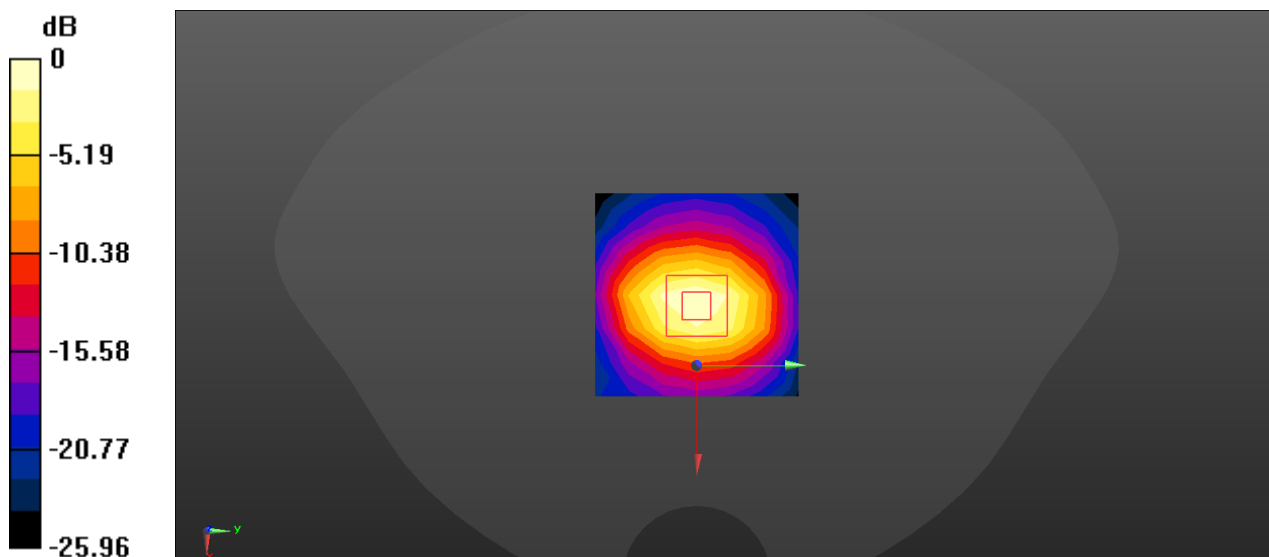 $0 \text{ dB} = 18.2 \text{ W/kg} = 12.60 \text{ dBW/kg}$

System Check_Head_2600MHz

DUT: D2600V2-1162; Type: D2600V2; Serial: D2600V2 - SN:1162

Communication System: UID 0, CW (0); Frequency: 2600 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.046$ S/m; $\epsilon_r = 37.501$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.02, 7.02, 7.02); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Pin=250mW/Area Scan (7x7x1); Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 23.6 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 112.9 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 29.1 W/kg

SAR(1 g) = 14 W/kg; SAR(10 g) = 6.36 W/kg

Maximum value of SAR (measured) = 23.6 W/kg

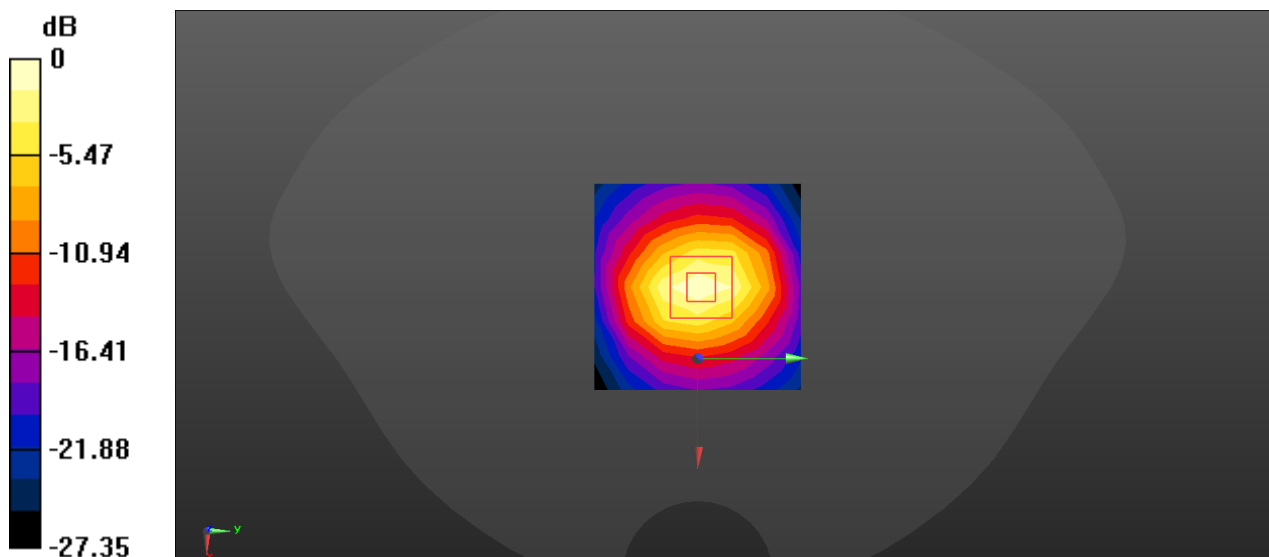

$$0 \text{ dB} = 23.6 \text{ W/kg} = 13.73 \text{ dBW/kg}$$

System Check_Head_5250MHz

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1296

Communication System: UID 0, CW (0); Frequency: 5250 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.906$ S/m; $\epsilon_r = 37.378$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(5.25, 5.25, 5.25); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Pin=100mW/Area Scan (7x7x1); Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 10.5 W/kg


Pin=100mW/Zoom Scan (7x7x17)/Cube 0; Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.27 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 36.4 W/kg

SAR(1 g) = 7.42 W/kg; SAR(10 g) = 2.07 W/kg

Maximum value of SAR (measured) = 10.7 W/kg

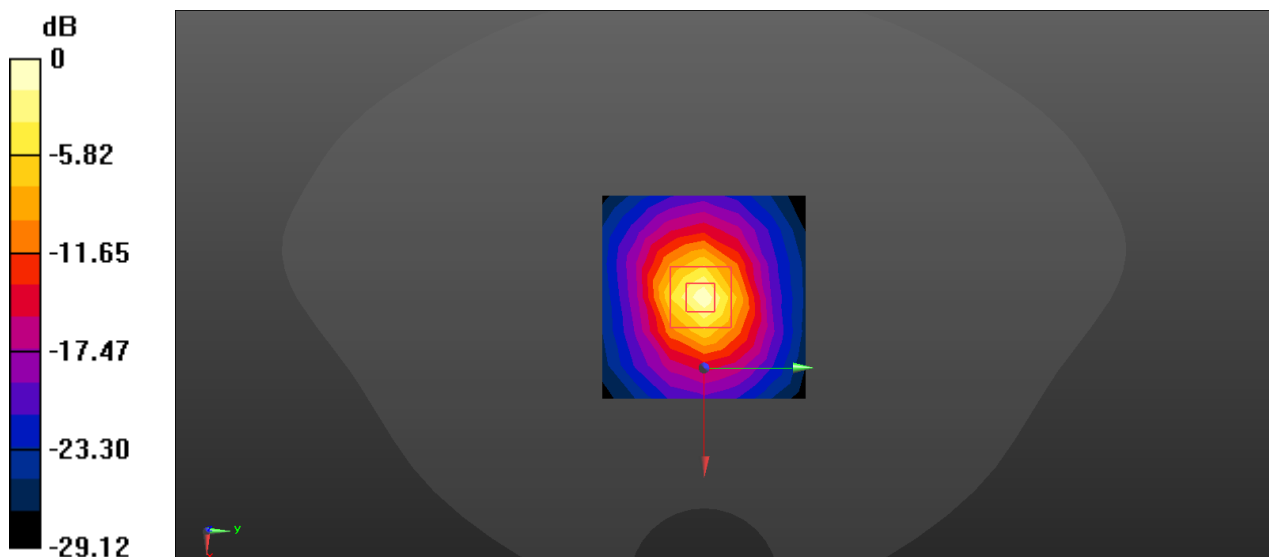 $0 \text{ dB} = 10.7 \text{ W/kg} = 10.29 \text{ dBW/kg}$

System Check_Head_5750MHz

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1296

Communication System: UID 0, CW (0); Frequency: 5750 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5750$ MHz; $\sigma = 5.465$ S/m; $\epsilon_r = 36.558$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(4.78, 4.78, 4.78); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 1963
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Pin=100mW/Area Scan (9x9x1); Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 10.5 W/kg


Pin=100mW/Zoom Scan (10x10x17)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.83 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 32.6 W/kg

SAR(1 g) = 7.63 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 12.0 W/kg

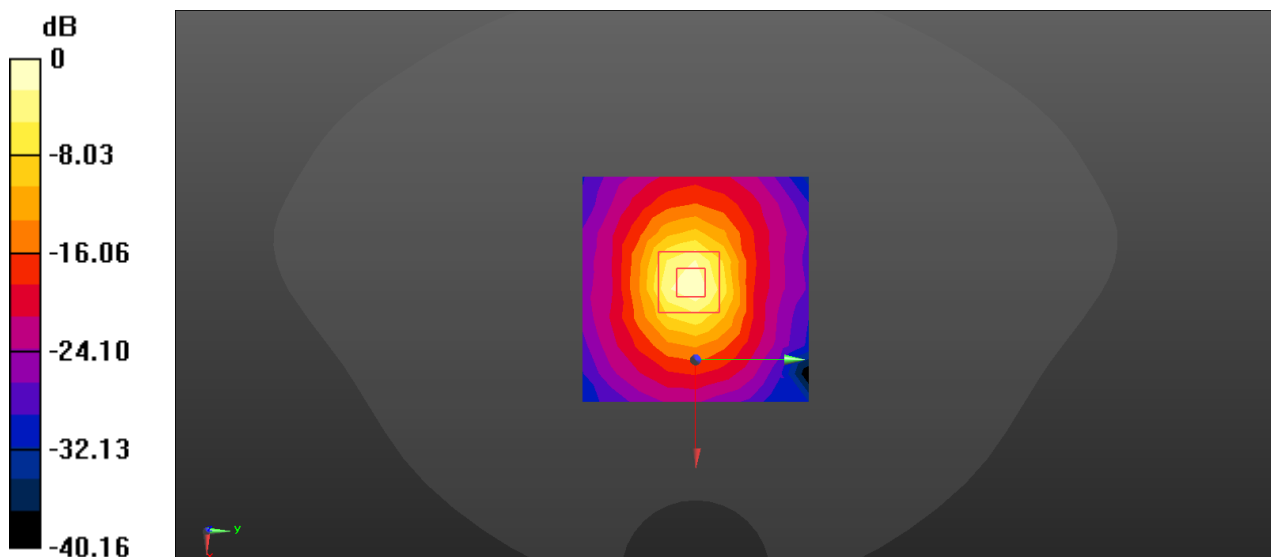 $0 \text{ dB} = 12.0 \text{ W/kg} = 10.79 \text{ dBW/kg}$

EUT TEST STRATEGY AND METHODOLOGY

Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

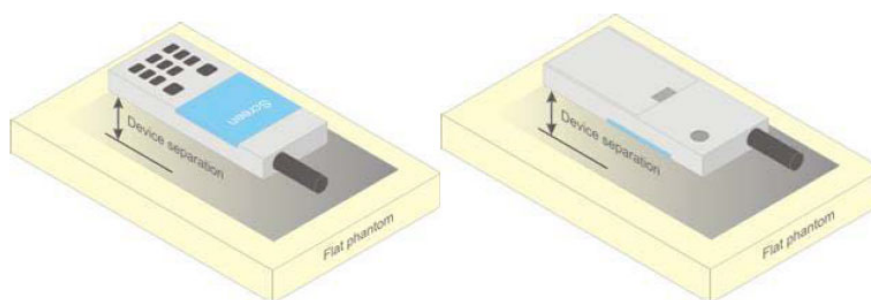


Figure 5 – Test positions for body-worn devices

Test Distance for SAR Evaluation

In this case the EUT (Equipment Under Test) is set against from the phantom, the test distance is 0mm.

SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or radiating structures of the EUT, the horizontal grid spacing was 15 mm x 15 mm, and the SAR distribution was determined by integrated grid of 1.5mm x 1.5mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

- 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

- 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.



All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.

CONDUCTED OUTPUT POWER MEASUREMENT

Test Procedure

The RF output of the transmitter was connected to the input of the Communication Test Set and Power Meter

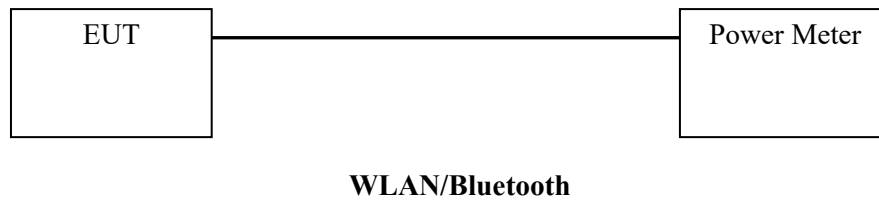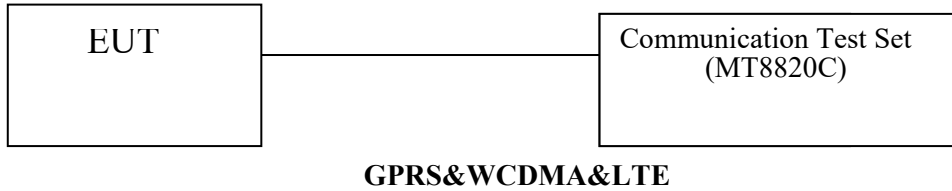

Radio Configuration

The power measurement was configured by the Wireless Communication Test Set.

GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GPRS or EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

> 27 dBm for EGPRS 850

> 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desired test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal on to turn on the signal and change settings

WCDMA Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_e/β_d	8/15

HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode Subset	HSDPA 1	HSDPA 2	HSDPA 3	HSDPA 4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	$\beta_d(SF)$	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR(dB)	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{cc}	209/225	12/15	30/15	2/15	5/15
	β_c / β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs} = \beta_{hs} / \beta_c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	

HSPA+

Sub-test	β_c (Note3)	β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

FDD-LTE

For UE Power Class 1 and 3, the allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2-1 due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

For UE Power Class 1 and 3 the specific requirements and identified sub clauses are specified in Table 6.2.4-1 along with the allowed A-MPR values that may be used to meet these requirements. The allowed A-MPR values specified below in Table 6.2.4-1 to 6.2.4-15 are in addition to the allowed MPR requirements specified in sub clause 6.2.3.

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
NS_05	6.6.3.3.1	1	10, 15, 20	Table 6.2.4-4	
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	≥ 50	≤ 1
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 5.6-1	N/A
NS_08	6.6.3.3.3	19	10, 15	Table 6.2.4-2	
NS_09	6.6.3.3.4	21	10, 15	> 44	≤ 3
				> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	
NS_11	6.6.2.2.1	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
NS_12	6.6.3.3.5	26	1.4, 3, 5	Table 6.2.4-6	
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9 Table 6.2.4-10	
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5	≥ 2	≤ 1
			10, 15, 20	≥ 1	≤ 4
NS_19	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_20	6.2.2 6.6.2.2.1 6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
...					
NS_32	-	-	-	-	-

TDD-LTE

P TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

We used configuration 0 for LTE Band 41 SAR test, that is 63.33%(1:1.58)for duty cycle.


Proximity Sensor Operation

Triggering distances (Per KDB 616217)

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (6000MHz) and lowest (600MHz) frequency was used for proximity sensor triggering testing. It should be applied to determine proximity sensor triggering distances for the back surface and individual edges of a tablet.

2. Capacitive proximity sensor placed coincident with antenna elements at the left end of the pos are utilized to determine when the device comes in proximity of the user's body at the front or back or left side or right surface of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support. sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna

3. The device employs proximity sensors that detect the presence of the user's body or handhold at the front or back or left side or right side of the device. When back surface or edge of body worn condition is detected, GSM 850/GSM 1900/WCDMA II /WCDMA IV / WCDMA V /LTE Band 25<E Band 2 / LTE Band 66<E Band 4/LTE Band 7/ LTE Band 12<E Band 17/ LTE Band 26<E Band 5/LTE Band 40-low/LTE Band 40-upper/LTE Band 41/ WLAN5G reduced power will be active. Other mode or frequency band can't be active. (P-sensor can't work at detecting presence of the user's body at the bottom, top edges of the device.)

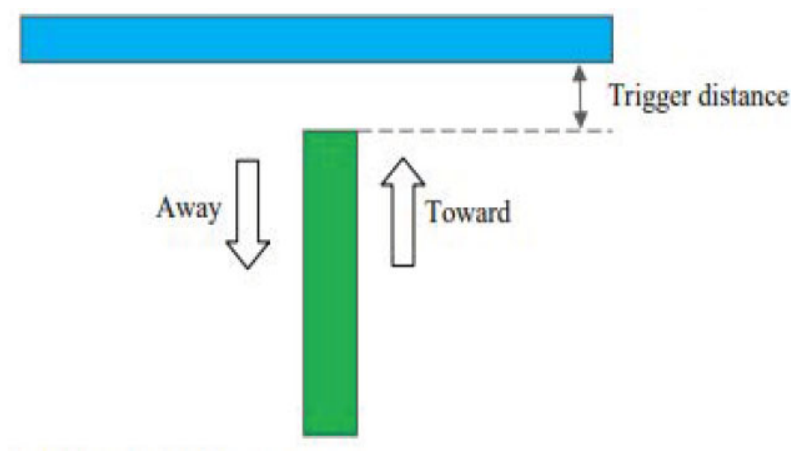

The minimum detection distances determined as below:

Proximity Sensor Triggering Distance(mm) and Triggering Power(dBm)

GSM 850:

Distance		0	1	2	3	4	5	6	7	8	14	18	19	20	21	22	23	30
Front edge	Toward	28	28	28	28	28	28	30	30	30	30	30	30	30	30	30	30	30
	Away	28	28	28	28	28	28	28	28	30	30	30	30	30	30	30	30	30
Back edge	Toward	28	28	28	28	28	28	30	30	30	30	30	30	30	30	30	30	30
	Away	28	28	28	28	28	28	28	28	30	30	30	30	30	30	30	30	30
Left edge	Toward	28	28	28	28	28	28	28	28	28	28	28	28	28	30	30	30	30
	Away	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	30	30

GSM 1900

Distance		0	1	2	3	4	5	6	7	8	14	18	19	20	21	22	23	30
Front edge	Toward	24	24	24	24	24	24	27	27	27	27	27	27	27	27	27	27	27
	Away	24	24	24	24	24	24	24	24	27	27	27	27	27	27	27	27	27
Back edge	Toward	24	24	24	24	24	24	27	27	27	27	27	27	27	27	27	27	27
	Away	24	24	24	24	24	24	24	24	27	27	27	27	27	27	27	27	27
Left edge	Toward	24	24	24	24	24	24	24	24	24	24	24	24	24	27	27	27	27
	Away	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	27	27

Note: For GSM Mode(s), the maximum time based average power (4Slots) were used for calculation.

WCDMA II:

Distance		0	1	2	3	4	5	6	7	8	14	18	19	20	21	22	23	30
Front edge	Toward	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Back edge	Toward	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Left edge	Toward	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5
	Away	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5

WCDMA IV:

Distance		0	1	2	3	4	5	6	7	8	14	18	19	20	21	22	23	30
Front edge	Toward	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Back edge	Toward	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Left edge	Toward	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5
	Away	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5

WCDMA V:

Distance		0	1	2	3	4	5	6	7	8	14	18	19	20	21	22	23	30
Front edge	Toward	20.5	20.5	20.5	20.5	20.5	20.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Back edge	Toward	20.5	20.5	20.5	20.5	20.5	20.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Left edge	Toward	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	22.5	22.5	22.5	22.5
	Away	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	22.5	22.5

LTE Band25 & LTE Band2:

Distance		0	1	2	3	4	5	6	7	8	14	18	19	20	21	22	23	30
Front edge	Toward	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Back edge	Toward	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Left edge	Toward	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5
	Away	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5

LTE Band12 & LTE Band17:

Distance		0	1	2	3	4	5	6	7	8	14	18	19	20	21	22	23	30
Front edge	Toward	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Back edge	Toward	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Left edge	Toward	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5
	Away	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5

LTE Band26 & LTE Band5:

Distance		0	1	2	3	4	5	6	7	8	14	18	19	20	21	22	23	30
Front edge	Toward	20.5	20.5	20.5	20.5	20.5	20.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Back edge	Toward	20.5	20.5	20.5	20.5	20.5	20.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Left edge	Toward	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	22.5	22.5	22.5	22.5
	Away	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	22.5	22.5

LTE Band66 & LTE Band4:

Distance		0	1	2	3	4	5	6	7	8	14	18	19	20	21	22	23	30
Front edge	Toward	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Back edge	Toward	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Left edge	Toward	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5
	Away	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5

LTE Band7:

Distance		0	1	2	3	4	5	6	7	8	14	18	19	20	21	22	23	30
Front edge	Toward	14.5	14.5	14.5	14.5	14.5	14.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Back edge	Toward	14.5	14.5	14.5	14.5	14.5	14.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Left edge	Toward	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	22.5	22.5	22.5	22.5
	Away	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	22.5	22.5

LTE Band40-low&: LTE Band40-up

Distance		0	1	2	3	4	5	6	7	8	14	18	19	20	21	22	23	30
Front edge	Toward	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Back edge	Toward	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Left edge	Toward	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5
	Away	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5

LTE Band41:

Distance		0	1	2	3	4	5	6	7	8	14	18	19	20	21	22	23	30
Front edge	Toward	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Back edge	Toward	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Left edge	Toward	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5
	Away	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5

WLAN 5.2G :

Distance		0	1	2	3	4	5	6	7	8	9	10	11	12	15	20	25	30
Right edge	Toward	9	9	9	9	9	9	12	12	12	12	12	12	12	12	12	12	12
	Away	9	9	9	9	9	9	9	9	9	12	12	12	12	12	12	12	12

WLAN 5.8G :

Distance		0	1	2	3	4	5	6	7	8	9	10	11	12	15	20	25	30
Right edge	Toward	7.5	7.5	7.5	7.5	7.5	7.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5
	Away	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5

Note: each side minimum detection distance was performed with below:

Toward: moving toward the phantom

Away: Moving away from the phantom

Summary of trigger distances:

Band	Back edge (mm)		Front edge (mm)		Left edge (mm)	
	Toward	Away	Toward	Away	Toward	Away
2G/3G/4G	5	7	5	7	20	22

Note: The SAR sensor located in GSM850 / GSM 1900 / WCDMA II / WCDMA IV/ WCDMA V/ LTE Band 2 / LTE Band4 / LTE Band5/ LTE Band26/ LTE Band12/ LTE Band17/LTE Band 7/ LTE Band 25/ LTE Band66 / LTE Band 40-low / LTE Band40-up / LTE Band 41 antenna


Band	Right edge (mm)	
	Toward	Away
WLAN 5G	5	8

Note: The SAR sensor located in WLAN5G antenna

Tilt angle

The influence of device tilt angles to proximity sensor triggering was determined by positioning each device edge that contains a transmitting antenna, perpendicular to the flat phantom, at 4 mm separation.

Rotating the device around the edge next to the phantom in $\leq 10^\circ$ increments until the device is $\pm 45^\circ$ from the vertical position at 0° . And the maximum output power remains in the reduced mode.

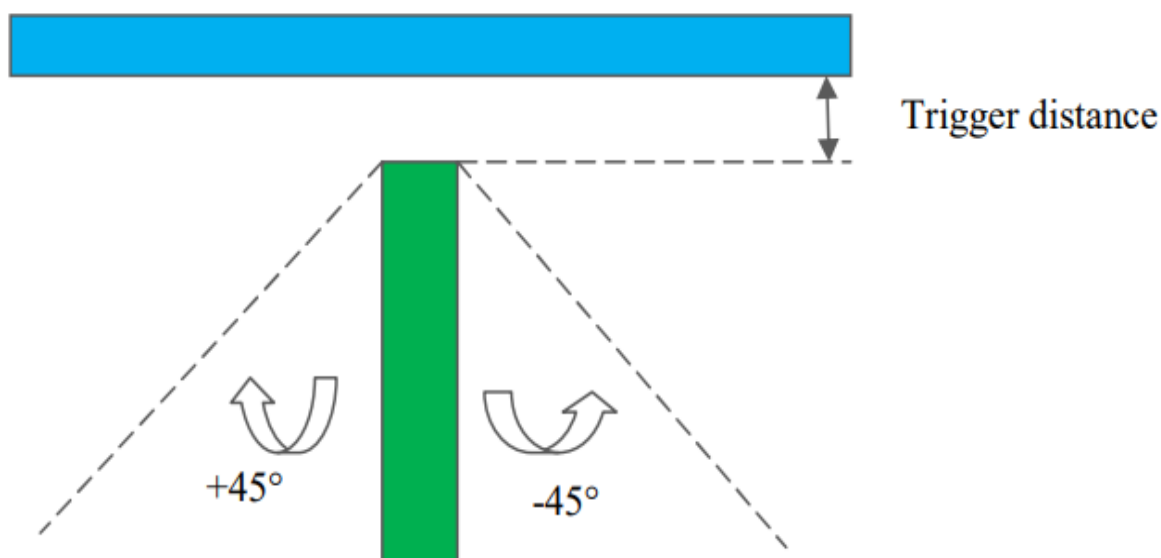

Proximity Sensor Status Table

Minimum Distance(mm)	-45	-40	-30	-20	-10	0	10	20	30	40	45
4	on	on	on	on	on	on	on	on	on	on	on

Resulting test positions for SAR measurements

Wireless Technologies	Position	Triggering Distance(mm)	Worst case distance For SAR(mm)
WWAN	Front	5	4
	Back	5	4
	Left	20	19

Wireless Technologies	Position	Triggering Distance(mm)	Worst case distance For SAR(mm)
WLAN	Right	5	4

Maximum Target Output Power**Full Power Target power**

Max Target Power(dBm)			
Mode/Band	Channel		
	Low	Middle	High
GSM850 GPRS 1Tx	34	34	34
GSM850 GPRS 2Tx	32	32	32
GSM850 GPRS 3Tx	31	31	31
GSM850 GPRS 4Tx	30	30	30
GSM850 EGPRS 1Tx	28	28	28
GSM850 EGPRS 2Tx	27	27	27
GSM850 EGPRS 3Tx	26	26	26
GSM850 EGPRS 4Tx	25.5	25.5	25.5
GSM1900 GPRS 1Tx	30	30	30
GSM1900 GPRS 2Tx	29	29	29
GSM1900 GPRS 3Tx	27.5	27.5	27.5
GSM1900 GPRS 4Tx	26.5	27	26.5
GSM1900 EGPRS 1Tx	26	26	26
GSM1900 EGPRS 2Tx	25	25	25
GSM1900 EGPRS 3Tx	24	24	24
GSM1900 EGPRS 4Tx	23	23	23
WCDMA Band 2	22.5	22.5	22.5
WCDMA Band 4	22.5	22.5	22.5
WCDMA Band 5	22.5	22.5	22.5
LTE Band 2	22.5	22.5	22.5
LTE Band 4	22.5	22.5	22.5
LTE Band 5	22.5	22.5	22.5
LTE Band 7	22.5	22.5	22.5
LTE Band 12	22.5	22.5	22.5
LTE Band 17	22.5	22.5	22.5
LTE Band 25	22.5	22.5	22.5
LTE Band 26	22.5	22.5	22.5
LTE Band 40-low	22.5	22.5	22.5
LTE Band 40-up	22.5	22.5	22.5
LTE Band 41	22.5	22.5	22.5
LTE Band 66	22.5	22.5	22.5
WLAN 2.4G (802.11b)	17	17	17
WLAN 2.4G (802.11g)	14.5	14.5	14.5
WLAN 2.4G (802.11n-HT20)	13.6	13.6	13.6
WLAN 2.4G (802.11n-HT40)	12.5	12.5	12.5
Bluetooth	10	10	10
BLE(1Mbps)	-3	-2	-2
BLE(2Mbps)	-3	-2	-2

WLAN 5.2G(802 11 a)	12	12	12
WLAN 5.2G(802 11 n20)	11.5	11.5	11.5
WLAN 5.2G(802 11 n40)	11.0	/	11.0
WLAN 5.2G(802 11 ac20)	11.5	11.5	11.5
WLAN 5.2G(802 11 ac40)	10.8	/	10.8
WLAN 5.2G(802 11 ac80)	/	9	/
WLAN 5.8G(802 11 a)	13.5	13.5	13.5
WLAN 5.8G(802 11 n20)	13.3	13.3	13.3
WLAN 5.8G(802 11 n40)	13.1	/	13.1
WLAN 5.8G(802 11 ac20)	13.3	13.3	13.3
WLAN 5.8G(802 11 ac40)	13.3	/	13.3
WLAN 5.8G(802 11 ac80)	/	13.2	/

Reduction Target power

Max Target Power(dBm)			
Mode/Band	Channel		
	Low	Middle	High
GSM850 GPRS 1Tx	32	32	32
GSM850 GPRS 2Tx	30	30	30
GSM850 GPRS 3Tx	29	29	29
GSM850 GPRS 4Tx	28	28	28
GSM850 EGPRS 1Tx	26	26	26
GSM850 EGPRS 2Tx	24.5	24.5	24.5
GSM850 EGPRS 3Tx	23.5	23.5	23.5
GSM850 EGPRS 4Tx	23	23	23
GSM1900 GPRS 1Tx	27	27	27
GSM1900 GPRS 2Tx	26	26	26
GSM1900 GPRS 3Tx	24.5	24.5	24.5
GSM1900 GPRS 4Tx	23.5	24	23.5
GSM1900 EGPRS 1Tx	23	23	23
GSM1900 EGPRS 2Tx	22	22	22
GSM1900 EGPRS 3Tx	21	21	21
GSM1900 EGPRS 4Tx	20	20	20
WCDMA Band 2	18.5	18.5	18.5
WCDMA Band 4	18.5	18.5	18.5
LTE Band 2	19.5	19.5	19.5
LTE Band 4	19.5	19.5	19.5
LTE Band 7	14.5	14.5	14.5
LTE Band 25	19.5	19.5	19.5
LTE Band 40-low	18.5	18.5	18.5
LTE Band 40-up	18.5	18.5	18.5
LTE Band 41	19.5	19.5	19.5
LTE Band 66	19.5	19.5	19.5
WCDMA Band 5	20.5	20.5	20.5
LTE Band 12	19.5	19.5	19.5
LTE Band 17	19.5	19.5	19.5
LTE Band 26	20.5	20.5	20.5
LTE Band 5	20.5	20.5	20.5
WLAN 5.2G(802 11 a)	9	9	9
WLAN 5.2G(802 11 n20)	8.5	8.5	8.5
WLAN 5.2G(802 11 n40)	7.5	/	7.5
WLAN 5.2G(802 11 ac20)	8.5	8.5	8.5
WLAN 5.2G(802 11 ac40)	8	/	8
WLAN 5.2G(802 11 ac80)	/	6	/
WLAN 5.8G(802 11 a)	7.5	7.5	7.5

WLAN 5.8G(802 11 n20)	7.3	7.3	7.3
WLAN 5.8G(802 11 n40)	7.2	/	7.2
WLAN 5.8G(802 11 ac20)	7.2	7.2	7.2
WLAN 5.8G(802 11 ac40)	7.3	/	7.3
WLAN 5.8G(802 11 ac80)	/	7.2	/

Test Results:**GPRS:**

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	33.05	31.87	30.67	29.64
	190	836.6	33.44	31.98	30.87	29.66
	251	848.8	33.98	31.02	30.9	29.49
PCS 1900	512	1850.2	29.45	28.64	27.26	26.01
	661	1880.0	29	28.79	27.13	26.68
	810	1909.8	29.35	28.76	27.29	26.04

EDGE:

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	27.26	26.74	25.59	24.69
	190	836.6	27.34	26.2	25.78	24.21
	251	848.8	27.52	26.24	25.15	24.99
PCS 1900	512	1850.2	25.09	24.91	23.39	22
	661	1880.0	25.87	24.35	23.93	22.87
	810	1909.8	25.48	24.63	23.93	22.08

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Time based Ave. power compared to slotted Ave. power	-9 dB	-6 dB	-4.25 dB	-3 dB
Crest Factor	8	4	2.66	2

The time based average power for GPRS

Band	Channel No.	Frequency (MHz)	Time based average Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
GSM 850	128	824.2	24.05	25.87	26.41	26.64
	190	836.6	24.44	25.98	26.61	26.66
	251	848.8	24.98	25.02	26.64	26.49
PCS 1900	512	1850.2	20.45	22.64	23	23.01
	661	1880	20	22.79	22.87	23.68
	810	1909.8	20.35	22.76	23.03	23.04

The time based average power for EDGE

Band	Channel No.	Frequency (MHz)	Time based average Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
GSM 850	128	824.2	18.26	20.74	21.33	21.69
	190	836.6	18.34	20.2	21.52	21.21
	251	848.8	18.52	20.24	20.89	21.99
PCS 1900	512	1850.2	16.09	18.91	19.13	19
	661	1880	16.87	18.35	19.67	19.87
	810	1909.8	16.48	18.63	19.67	19.08

Note:

1. Rohde & Schwarz Radio Communication Tester (CMU200) was used for the measurement of GSM peak and average output power for active timeslots.
- 2 .For GSM voice, 1 timeslot has been activated with power level 5 (850 MHz band) and 0 (1900 MHz band).
- 3 .For GPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 3(850 MHz band) and 3(1900 MHz band).
4. According to KDB941225D01-SAR for EGPRS mode are not required when the source-based time-averaged output power for data mode is lower than that in the normal GPRS mode.

WCDMA:**WCDMA Band II**

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band II)	Normal	Rel 99	1	22.17	22.19	21.99
		HSDPA	1	22.27	22.15	22.14
			2	22.29	22.02	22.26
			3	22.18	22.07	22.08
			4	22.21	22.10	22.06
		HSUPA	1	22.39	22.04	22.17
			2	22.24	21.93	22.22
			3	22.34	21.95	22.10
			4	22.37	22.02	22.15
			5	22.32	22.04	22.07
		HSPA+	1	22.33	22.04	22.13

WCDMA Band IV

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band IV)	Normal	Rel 99	1	21.99	22.34	22.22
		HSDPA	1	22.32	22.04	22.04
			2	22.26	22.02	22.23
			3	22.27	21.95	22.14
			4	22.33	22.13	22.10
		HSUPA	1	22.28	22.09	22.11
			2	22.24	22.04	22.14
			3	22.19	21.99	22.08
			4	22.33	22.12	22.22
			5	22.27	21.95	22.09
		HSPA+	1	22.30	22.10	22.03

WCDMA Band V

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band V)	Normal	Rel 99	1	22.06	22.16	22.15
		HSDPA	1	22.14	21.96	22.01
			2	22.14	22.18	22.16
			3	22.17	21.96	22.20
			4	22.15	22.01	22.11
		HSUPA	1	22.07	22.10	22.13
			2	21.98	22.15	22.14
			3	22.12	22.13	22.18
			4	22.05	21.98	22.18
			5	22.03	22.01	22.11
		HSPA+	1	22.05	22.00	22.11

Note:

1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model 1.
2. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/HSPA+ when the maximum average output of each RF channel is less than ¼ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.

Maximum Output Power:**LTE Band 2**

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	21.70	21.19	21.78
		1#3	22.00	21.41	21.30
		1#5	21.30	21.78	21.50
		3#0	21.69	21.35	21.42
		3#1	21.80	21.11	21.05
		3#3	22.14	21.16	21.48
		6#0	21.26	22.10	21.36
	16-QAM	1#0	21.78	21.26	21.04
		1#3	22.22	21.38	21.52
		1#5	21.48	22.09	21.78
		3#0	22.15	22.04	21.14
		3#1	21.77	22.02	21.49
		3#3	21.85	21.82	21.19
		6#0	22.08	22.07	21.19
3M	QPSK	1#0	21.47	21.18	21.50
		1#7	21.66	21.94	21.51
		1#14	21.58	21.87	21.37
		8#0	21.70	21.84	21.05
		8#4	21.26	21.25	21.11
		8#7	21.36	21.82	21.88
		15#0	22.14	21.24	21.87
	16-QAM	1#0	22.13	22.01	21.49
		1#7	21.65	21.25	21.40
		1#14	21.94	22.06	21.97
		8#0	21.39	21.86	21.13
		8#4	21.30	21.22	21.06
		8#7	21.43	21.79	21.20
		15#0	21.37	21.56	21.19

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	21.99	22.08	21.34
		1#12	21.70	22.09	21.62
		1#24	21.65	22.10	21.47
		12#0	21.56	22.01	21.29
		12#6	21.35	21.75	21.09
		12#11	21.26	21.93	21.03
		25#0	21.78	21.26	21.42
	16-QAM	1#0	21.98	21.74	21.29
		1#12	21.64	21.54	21.92
		1#24	22.24	22.07	21.69
		12#0	21.42	21.54	21.58
		12#6	22.14	21.13	21.96
		12#11	21.82	21.82	21.92
		25#0	21.58	21.71	21.34
10M	QPSK	1#0	21.94	21.17	21.60
		1#24	21.69	21.14	21.78
		1#49	21.61	21.95	21.27
		25#0	22.08	21.59	21.60
		25#12	21.75	21.45	21.74
		25#24	21.89	21.64	21.59
		50#0	21.75	21.94	21.49
	16-QAM	1#0	21.84	21.84	21.88
		1#24	22.19	21.96	21.34
		1#49	21.34	21.34	22.00
		25#0	21.96	21.13	21.78
		25#12	22.05	22.10	21.21
		25#24	21.57	21.76	21.92
		50#0	21.61	21.90	21.24

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	21.53	22.02	21.73
		1#37	21.55	21.84	21.79
		1#74	21.40	21.29	22.00
		36#0	21.58	21.81	21.70
		36#17	21.47	21.26	21.17
		36#35	21.56	21.15	21.21
		75#0	21.58	21.78	21.97
	16-QAM	1#0	21.55	21.82	21.77
		1#37	21.51	21.93	21.51
		1#74	21.29	22.03	21.57
		36#0	21.82	21.34	21.43
		36#17	21.37	21.23	21.31
		36#35	21.69	21.49	21.93
		75#0	22.20	21.98	21.93
20M	QPSK	1#0	22.11	22.26	21.19
		1#49	22.20	21.32	21.68
		1#99	21.53	21.76	21.93
		50#0	22.18	22.06	21.67
		50#24	22.21	21.72	21.27
		50#49	21.53	21.80	21.59
		100#0	21.87	21.96	21.05
	16-QAM	1#0	21.87	21.90	21.98
		1#49	21.33	21.73	21.03
		1#99	22.04	22.06	21.84
		50#0	21.57	21.15	21.75
		50#24	21.63	21.40	21.80
		50#49	21.40	21.56	21.23
		100#0	22.06	21.39	21.45

LTE Band 4

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	21.99	21.57	21.68
		1#3	21.99	21.36	21.14
		1#5	21.54	21.96	21.22
		3#0	21.43	21.21	22.00
		3#1	21.73	21.23	21.02
		3#3	21.93	21.49	21.05
		6#0	22.15	21.86	21.11
	16-QAM	1#0	21.47	21.91	21.40
		1#3	21.47	21.74	21.52
		1#5	21.43	22.05	21.33
		3#0	22.10	21.63	21.10
		3#1	21.40	21.79	21.13
		3#3	21.48	21.47	21.36
		6#0	21.46	21.98	21.62
3M	QPSK	1#0	21.49	22.05	21.17
		1#7	22.08	21.41	21.59
		1#14	21.33	21.89	21.10
		8#0	22.13	21.65	21.43
		8#4	22.01	21.64	21.54
		8#7	22.13	21.53	21.31
		15#0	22.08	21.57	21.38
	16-QAM	1#0	21.75	21.53	22.01
		1#7	21.36	22.04	21.68
		1#14	21.44	22.06	21.21
		8#0	21.96	22.07	21.83
		8#4	22.09	21.22	21.38
		8#7	21.38	21.26	21.19
		15#0	22.18	21.26	21.91

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	21.32	21.86	21.59
		1#12	21.66	21.58	21.60
		1#24	22.10	21.50	21.49
		12#0	22.04	21.33	21.46
		12#6	21.51	21.78	21.29
		12#11	21.67	21.13	21.46
		25#0	21.68	21.22	21.82
	16-QAM	1#0	21.76	21.81	21.48
		1#12	21.54	21.31	21.27
		1#24	22.19	21.91	21.07
		12#0	22.14	21.72	21.99
		12#6	21.55	21.39	21.26
		12#11	21.97	21.29	21.91
		25#0	21.50	21.97	22.01
10M	QPSK	1#0	21.29	21.12	21.77
		1#24	21.56	21.38	21.75
		1#49	22.03	22.06	21.13
		25#0	21.66	21.98	21.51
		25#12	22.05	22.08	21.64
		25#24	22.03	21.13	21.07
		50#0	21.32	21.39	21.72
	16-QAM	1#0	22.12	21.82	21.29
		1#24	22.13	21.38	21.76
		1#49	21.56	21.21	21.19
		25#0	21.73	21.89	21.36
		25#12	21.59	21.40	21.41
		25#24	21.77	21.64	21.41
		50#0	21.59	21.58	21.45

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	21.53	22.09	21.63
		1#37	21.33	21.95	21.16
		1#74	22.16	21.23	21.07
		36#0	21.83	21.26	21.58
		36#17	21.56	21.52	21.17
		36#35	22.00	21.70	21.16
		75#0	21.21	21.92	21.36
	16-QAM	1#0	21.27	21.33	21.84
		1#37	21.80	21.33	21.20
		1#74	21.40	21.37	21.97
		36#0	21.59	21.39	21.81
		36#17	21.84	21.69	21.45
		36#35	21.74	21.16	21.28
		75#0	22.10	21.40	21.53
20M	QPSK	1#0	22.15	22.21	22.17
		1#49	21.65	21.12	21.20
		1#99	21.26	21.44	21.59
		50#0	21.76	21.96	21.90
		50#24	22.11	21.56	21.09
		50#49	21.78	21.40	21.24
		100#0	21.41	21.50	22.02
	16-QAM	1#0	22.04	21.45	21.15
		1#49	21.37	21.34	21.79
		1#99	22.06	21.91	21.97
		50#0	21.65	22.02	21.23
		50#24	21.69	21.41	21.26
		50#49	21.72	21.37	21.53
		100#0	21.42	21.13	21.66

LTE Band 5

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	21.96	21.73	21.78
		1#3	21.46	21.21	21.54
		1#5	21.49	21.62	21.28
		3#0	22.10	21.25	21.80
		3#1	21.47	21.94	21.99
		3#3	22.04	21.61	21.44
		6#0	21.81	21.12	21.48
	16-QAM	1#0	21.66	22.05	21.27
		1#3	21.99	21.44	21.81
		1#5	21.99	21.31	21.94
		3#0	21.78	21.92	21.29
		3#1	21.93	21.51	21.60
		3#3	22.02	21.70	21.36
		6#0	21.45	21.77	21.67
3M	QPSK	1#0	21.84	21.34	21.43
		1#7	21.76	21.44	21.17
		1#14	21.72	21.49	21.19
		8#0	21.97	21.62	21.29
		8#4	21.72	21.60	21.42
		8#7	21.95	21.96	21.95
		15#0	21.57	21.48	21.18
	16-QAM	1#0	22.09	21.20	21.82
		1#7	21.93	22.05	21.43
		1#14	21.58	21.49	21.63
		8#0	21.85	21.60	21.17
		8#4	21.96	21.22	21.89
		8#7	21.70	21.68	21.68
		15#0	21.60	21.35	21.47

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	21.33	21.44	21.86
		1#12	21.93	22.10	21.19
		1#24	22.12	22.08	21.05
		12#0	21.79	21.52	21.35
		12#6	21.34	21.72	21.33
		12#11	21.78	21.28	21.32
		25#0	21.90	22.05	21.66
	16-QAM	1#0	22.19	21.40	21.23
		1#12	21.35	21.13	21.76
		1#24	21.54	22.02	21.52
		12#0	21.99	21.55	21.05
		12#6	21.43	21.58	21.95
		12#11	21.47	21.14	21.06
		25#0	22.04	21.54	21.86
10M	QPSK	1#0	22.18	22.25	22.15
		1#24	21.72	21.64	21.56
		1#49	21.40	21.97	21.73
		25#0	21.34	21.88	21.42
		25#12	22.06	21.51	21.65
		25#24	22.16	21.43	21.19
		50#0	22.20	21.74	21.88
	16-QAM	1#0	21.44	21.21	21.02
		1#24	21.68	21.69	21.26
		1#49	22.17	22.00	21.21
		25#0	21.69	21.26	21.37
		25#12	21.32	21.99	21.57
		25#24	22.14	21.35	21.98
		50#0	21.83	21.44	21.06

LTE Band 7

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	22.11	21.78	21.91
		1#12	21.78	21.22	21.53
		1#24	21.48	21.23	21.62
		12#0	21.53	21.54	21.65
		12#6	21.79	21.66	21.02
		12#11	21.28	21.85	21.28
		25#0	21.73	21.89	21.85
	16-QAM	1#0	21.32	22.02	21.05
		1#12	21.38	21.73	21.28
		1#24	21.49	21.19	22.02
		12#0	22.20	21.95	21.85
		12#6	22.13	21.11	21.14
		12#11	21.51	21.59	21.11
		25#0	21.65	21.70	21.55
10M	QPSK	1#0	21.78	21.57	21.39
		1#24	21.63	21.58	21.76
		1#49	21.73	21.66	21.99
		25#0	21.28	21.49	21.88
		25#12	21.73	21.71	21.47
		25#24	21.43	21.71	21.16
		50#0	21.80	21.59	22.02
	16-QAM	1#0	21.94	22.09	21.73
		1#24	21.29	21.97	22.00
		1#49	21.63	21.50	21.71
		25#0	21.96	21.52	21.05
		25#12	21.79	21.15	21.96
		25#24	21.82	21.72	21.31
		50#0	21.95	21.53	21.07

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	21.65	21.45	21.56
		1#37	21.58	21.35	21.51
		1#74	21.96	21.45	21.64
		36#0	22.15	21.76	21.90
		36#17	21.29	21.85	21.12
		36#35	22.20	21.55	21.49
		75#0	22.14	21.45	21.06
	16-QAM	1#0	21.38	21.69	21.94
		1#37	21.81	22.04	21.35
		1#74	21.86	21.26	22.00
		36#0	21.42	21.25	21.65
		36#17	22.01	21.46	21.96
		36#35	21.80	21.14	21.93
		75#0	21.84	21.70	21.30
20M	QPSK	1#0	21.34	22.21	22.12
		1#49	22.04	22.04	21.09
		1#99	22.20	21.81	21.50
		50#0	21.59	21.99	21.27
		50#24	21.65	21.11	21.44
		50#49	21.63	21.28	21.26
		100#0	21.98	21.42	21.95
	16-QAM	1#0	21.50	22.02	21.91
		1#49	22.19	21.16	21.54
		1#99	21.29	21.23	21.26
		50#0	21.32	21.67	21.76
		50#24	21.56	21.60	21.63
		50#49	21.79	21.48	21.15
		100#0	21.44	21.51	21.19

LTE Band 12

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	22.19	21.44	21.98
		1#3	22.06	21.33	21.09
		1#5	21.85	21.90	21.07
		3#0	21.63	21.54	22.00
		3#1	22.22	21.17	21.90
		3#3	21.30	21.54	21.64
		6#0	22.17	21.49	21.07
	16-QAM	1#0	21.30	21.98	21.36
		1#3	22.00	21.59	21.67
		1#5	21.81	21.95	21.57
		3#0	21.30	21.64	21.10
		3#1	21.86	21.78	21.69
		3#3	21.33	21.82	21.77
		6#0	21.93	22.00	21.62
3M	QPSK	1#0	21.24	21.31	21.73
		1#7	22.11	21.21	21.14
		1#14	21.62	21.40	21.93
		8#0	21.44	21.46	21.13
		8#4	21.65	21.50	21.31
		8#7	22.16	21.35	21.18
		15#0	22.05	21.37	21.12
	16-QAM	1#0	21.88	21.55	21.61
		1#7	21.35	21.69	21.98
		1#14	21.28	22.02	21.38
		8#0	21.58	22.02	21.03
		8#4	21.82	22.11	21.95
		8#7	21.70	21.56	21.65
		15#0	22.16	21.85	21.50

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	21.28	21.66	21.69
		1#12	21.46	21.80	21.19
		1#24	21.61	21.54	21.76
		12#0	21.62	21.33	21.51
		12#6	21.53	21.80	21.84
		12#11	22.15	21.76	21.94
		25#0	21.32	21.43	21.96
	16-QAM	1#0	21.40	21.83	21.87
		1#12	22.14	22.11	21.18
		1#24	21.33	21.91	21.32
		12#0	21.58	21.39	21.93
		12#6	21.75	21.53	21.85
		12#11	22.09	22.03	21.95
		25#0	21.75	21.87	21.51
10M	QPSK	1#0	21.61	22.24	22.19
		1#24	21.52	21.43	21.81
		1#49	22.05	21.37	21.56
		25#0	21.91	21.86	21.10
		25#12	22.01	22.01	21.78
		25#24	21.47	21.92	21.81
		50#0	21.82	21.52	21.95
	16-QAM	1#0	21.30	21.41	21.36
		1#24	22.05	21.60	21.53
		1#49	22.09	21.29	21.62
		25#0	21.96	21.93	21.22
		25#12	21.44	21.42	21.55
		25#24	21.58	21.47	21.97
		50#0	21.35	21.95	21.39

LTE Band 17

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	22.06	21.94	21.88
		1#12	21.54	21.81	21.84
		1#24	22.04	21.70	21.44
		12#0	21.82	22.08	21.36
		12#6	21.44	21.43	21.38
		12#11	21.79	21.88	21.07
		25#0	22.16	21.46	21.38
	16-QAM	1#0	21.84	21.54	21.96
		1#12	21.70	21.53	21.20
		1#24	21.64	21.18	21.32
		12#0	21.34	21.74	21.38
		12#6	21.96	21.45	21.72
		12#11	22.17	21.94	21.56
		25#0	21.74	21.79	21.97
10M	QPSK	1#0	21.41	22.31	21.63
		1#24	21.89	21.85	21.51
		1#49	21.63	21.85	21.46
		25#0	22.17	22.23	21.25
		25#12	22.03	21.86	21.06
		25#24	21.70	21.85	21.90
		50#0	21.41	21.93	21.93
	16-QAM	1#0	21.65	22.10	21.48
		1#24	21.82	21.51	21.32
		1#49	21.30	21.11	21.62
		25#0	22.04	21.68	21.84
		25#12	21.65	21.70	21.11
		25#24	21.50	22.05	21.05
		50#0	21.67	21.48	21.93

LTE Band 25

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	22.04	21.48	21.95
		1#3	21.96	21.14	21.90
		1#5	22.11	21.46	22.01
		3#0	21.57	21.44	21.23
		3#1	21.50	21.96	21.43
		3#3	21.64	21.49	21.79
		6#0	21.53	22.03	21.61
	16-QAM	1#0	21.28	22.11	21.18
		1#3	21.68	21.43	21.77
		1#5	22.02	21.69	21.41
		3#0	22.10	21.98	21.78
		3#1	22.00	21.66	21.90
		3#3	22.21	21.80	21.61
		6#0	22.17	21.33	21.86
3M	QPSK	1#0	21.98	21.92	21.13
		1#7	21.46	21.97	21.08
		1#14	21.68	22.02	21.36
		8#0	21.67	21.86	21.72
		8#4	21.81	21.78	21.69
		8#7	21.28	21.75	21.57
		15#0	21.74	22.09	21.40
	16-QAM	1#0	21.94	22.05	21.94
		1#7	21.66	21.72	21.16
		1#14	21.69	21.24	21.46
		8#0	22.15	21.98	21.30
		8#4	21.63	21.30	21.22
		8#7	21.31	21.93	21.41
		15#0	22.21	22.08	21.96

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	22.16	21.82	21.42
		1#12	21.98	21.71	21.62
		1#24	21.47	21.96	21.18
		12#0	21.84	22.09	21.06
		12#6	21.67	21.64	21.58
		12#11	21.81	21.61	21.57
		25#0	21.68	21.58	21.88
	16-QAM	1#0	21.86	21.73	21.34
		1#12	21.88	22.01	21.49
		1#24	21.39	22.11	21.79
		12#0	21.30	21.19	21.44
		12#6	21.41	21.39	21.23
		12#11	21.44	21.50	21.56
		25#0	22.17	21.35	21.38
10M	QPSK	1#0	21.84	21.86	21.22
		1#24	21.92	21.17	21.51
		1#49	21.72	21.52	21.84
		25#0	21.27	21.42	22.02
		25#12	21.70	21.21	21.12
		25#24	21.82	21.24	21.52
		50#0	21.43	21.31	21.95
	16-QAM	1#0	21.99	21.61	21.04
		1#24	22.12	21.28	21.61
		1#49	22.15	21.37	21.64
		25#0	22.22	21.90	21.72
		25#12	22.23	21.99	21.69
		25#24	21.91	21.32	21.39
		50#0	21.97	21.65	21.70

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	21.31	22.07	21.73
		1#37	22.07	21.46	21.06
		1#74	21.75	21.16	21.39
		36#0	21.43	21.20	21.04
		36#17	21.84	21.97	21.57
		36#35	21.69	21.37	21.40
		75#0	21.76	21.62	21.70
	16-QAM	1#0	21.71	21.12	21.75
		1#37	21.40	21.92	21.17
		1#74	21.96	22.00	21.06
		36#0	22.14	21.54	21.63
		36#17	21.64	21.23	21.66
		36#35	21.92	21.18	21.65
		75#0	21.29	21.34	21.08
20M	QPSK	1#0	21.12	22.25	21.19
		1#49	21.91	21.83	21.30
		1#99	21.80	21.64	21.34
		50#0	21.50	22.14	21.47
		50#24	22.22	21.47	21.10
		50#49	21.47	21.22	21.30
		100#0	21.94	21.74	21.76
	16-QAM	1#0	22.24	21.50	21.44
		1#49	22.18	21.39	21.97
		1#99	21.75	21.20	21.33
		50#0	21.70	21.65	21.99
		50#24	22.25	21.67	21.54
		50#49	21.81	22.07	21.40
		100#0	21.41	21.57	21.24

LTE Band 26

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	21.73	21.32	21.20
		1#3	21.89	21.63	21.12
		1#5	21.80	21.20	21.76
		3#0	21.36	21.90	21.81
		3#1	21.26	21.91	21.54
		3#3	21.37	22.08	21.57
		6#0	21.43	21.56	21.78
	16-QAM	1#0	21.77	21.45	21.54
		1#3	22.14	22.08	21.32
		1#5	21.68	21.44	21.94
		3#0	22.09	22.00	21.72
		3#1	22.02	21.50	21.91
		3#3	22.16	21.70	21.53
		6#0	21.67	21.17	21.62
3M	QPSK	1#0	21.48	21.34	21.24
		1#7	21.84	21.82	21.33
		1#14	21.50	21.31	21.18
		8#0	21.61	21.85	21.66
		8#4	22.24	21.44	21.98
		8#7	21.47	21.96	21.96
		15#0	22.05	22.05	21.75
	16-QAM	1#0	22.02	21.77	21.04
		1#7	22.12	22.08	21.73
		1#14	21.83	21.54	21.29
		8#0	21.96	21.75	21.38
		8#4	21.27	22.02	21.74
		8#7	21.98	21.37	21.41
		15#0	22.07	21.13	21.19

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	21.33	21.80	21.07
		1#12	21.72	21.98	21.81
		1#24	21.37	21.58	21.90
		12#0	21.89	21.65	21.50
		12#6	21.75	21.34	21.21
		12#11	22.17	21.36	21.08
		25#0	21.84	21.74	21.34
	16-QAM	1#0	21.67	21.46	21.35
		1#12	21.28	21.80	22.00
		1#24	21.67	21.48	21.17
		12#0	21.40	21.57	21.50
		12#6	21.40	21.67	21.55
		12#11	21.59	21.20	21.10
		25#0	21.35	21.42	21.74
10M	QPSK	1#0	21.49	21.91	21.78
		1#24	21.43	21.26	21.05
		1#49	21.95	21.36	21.68
		25#0	21.61	22.10	21.65
		25#12	21.89	21.64	21.48
		25#24	21.70	21.12	21.11
		50#0	22.11	21.99	21.27
	16-QAM	1#0	21.67	22.02	21.33
		1#24	22.25	21.83	21.95
		1#49	22.04	21.92	21.18
		25#0	22.15	21.17	21.21
		25#12	21.32	21.24	21.26
		25#24	21.41	21.14	21.73
		50#0	22.07	22.09	21.37

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	22.04	22.26	22.14
		1#37	21.52	22.09	21.55
		1#74	22.19	21.16	21.96
		36#0	22.09	22.18	21.74
		36#17	22.24	21.23	21.41
		36#35	21.75	21.13	21.27
		75#0	21.92	21.96	21.04
	16-QAM	1#0	21.89	21.12	21.15
		1#37	21.34	21.13	21.13
		1#74	21.73	21.81	21.02
		36#0	21.78	21.26	21.20
		36#17	22.02	21.95	21.33
		36#35	21.99	21.34	21.70
		75#0	21.31	21.59	21.23

LTE Band 40 Lower

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	21.53	21.14	21.26
		1#12	21.67	21.89	21.09
		1#24	21.93	21.16	21.40
		12#0	22.15	21.24	21.08
		12#6	21.39	21.92	21.78
		12#11	21.61	21.14	21.44
		25#0	21.96	21.22	21.33
	16-QAM	1#0	21.42	21.17	21.96
		1#12	21.99	21.23	21.38
		1#24	21.65	21.97	21.99
		12#0	21.51	21.68	21.36
		12#6	21.45	21.78	21.24
		12#11	21.91	21.85	21.44
		25#0	21.70	21.97	21.35
10M	QPSK	1#0	/	22.16	/
		1#24	/	21.50	/
		1#49	/	21.63	/
		25#0	/	22.06	/
		25#12	/	21.95	/
		25#24	/	22.06	/
		50#0	/	21.12	/
	16-QAM	1#0	/	22.00	/
		1#24	/	21.40	/
		1#49	/	21.60	/
		25#0	/	21.11	/
		25#12	/	21.82	/
		25#24	/	21.65	/
		50#0	/	21.50	/

Note:

LTE Band40 duty cycle is 32.34%. Refer to the report for details RKSA240109002-00D

LTE Band 40 Upper

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	21.87	21.96	21.80
		1#12	21.84	21.83	21.51
		1#24	22.24	21.85	21.89
		12#0	21.37	21.61	21.24
		12#6	21.29	21.63	21.45
		12#11	22.05	21.47	21.57
		25#0	21.62	21.30	21.08
	16-QAM	1#0	22.17	21.80	21.29
		1#12	21.78	21.48	21.74
		1#24	21.92	21.33	21.58
		12#0	21.98	21.72	21.26
		12#6	21.55	21.58	21.28
		12#11	21.59	21.71	21.18
		25#0	22.12	21.43	21.06
10M	QPSK	1#0	/	22.25	/
		1#24	/	21.52	/
		1#49	/	21.79	/
		25#0	/	22.14	/
		25#12	/	21.94	/
		25#24	/	21.18	/
		50#0	/	21.74	/
	16-QAM	1#0	/	21.19	/
		1#24	/	22.03	/
		1#49	/	21.79	/
		25#0	/	21.15	/
		25#12	/	21.66	/
		25#24	/	21.71	/
		50#0	/	21.88	/

Note:

LTE Band40 duty cycle is 31.32%. Refer to the report for details RKSA240109002-00D

LTE Band 41

Test Bandwidth	Test Modulation	Resource Block & RB offset	Lowest Channel (dBm)	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	22.23	21.30	21.62	21.44
		1#12	21.43	21.41	21.97	21.41
		1#24	22.02	21.19	21.21	21.67
		12#0	21.74	21.21	21.49	21.94
		12#6	21.46	21.30	21.20	21.29
		12#11	22.24	22.01	21.31	21.05
		25#0	21.73	21.96	21.49	21.81
	16-QAM	1#0	21.70	21.86	22.11	21.73
		1#12	21.58	21.70	21.55	21.87
		1#24	21.49	22.10	21.80	21.28
		12#0	21.84	21.76	21.93	21.32
		12#6	21.57	22.11	21.40	21.59
		12#11	21.84	21.10	21.25	21.32
		25#0	22.25	21.45	21.58	21.17
10M	QPSK	1#0	21.73	21.10	21.85	21.34
		1#24	21.59	21.71	21.77	21.82
		1#49	22.15	21.02	21.77	21.51
		25#0	21.96	21.44	21.83	21.19
		25#12	21.90	21.90	21.18	22.01
		25#24	22.07	21.01	21.82	21.63
		50#0	21.98	21.82	21.77	21.21
	16-QAM	1#0	21.56	21.00	21.14	21.70
		1#24	21.31	21.30	22.09	21.33
		1#49	21.84	21.36	21.64	21.04
		25#0	21.38	21.50	21.45	21.42
		25#12	21.62	21.71	22.02	21.84
		25#24	21.53	21.92	21.88	21.70
		50#0	21.90	21.60	21.57	21.09

Note: The lowest channel frequency, middle channel frequency and high channel frequency is low, middle and high test frequencies corresponding to different bandwidths within the frequency range 2555MHz~2655MHz, and the low channel frequency is 2580MHz.

Test Bandwidth	Test Modulation	Resource Block & RB offset	Lowest Channel (dBm)	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	21.45	21.52	21.61	21.92
		1#37	21.53	21.69	21.77	21.05
		1#74	21.46	21.46	21.66	21.05
		36#0	22.09	21.62	21.98	21.08
		36#17	21.68	21.81	21.97	21.56
		36#35	21.88	21.36	21.13	21.73
		75#0	21.70	21.42	21.32	22.02
	16-QAM	1#0	21.73	21.36	21.54	21.11
		1#37	21.48	21.36	21.22	21.41
		1#74	22.10	21.72	21.55	21.80
		36#0	21.57	21.06	21.11	21.11
		36#17	21.69	21.30	21.43	21.30
		36#35	21.75	21.68	21.51	21.82
		75#0	21.41	21.51	21.18	21.89
20M	QPSK	1#0	22.16	22.16	22.30	22.19
		1#49	21.52	21.13	22.10	21.31
		1#99	21.31	21.53	21.57	21.75
		50#0	22.05	22.12	22.15	22.14
		50#24	22.18	21.86	22.09	21.66
		50#49	21.63	21.40	21.62	21.68
		100#0	21.42	21.63	21.76	21.35
	16-QAM	1#0	22.02	21.69	21.29	21.04
		1#49	22.20	21.62	21.23	21.48
		1#99	22.07	22.05	21.81	22.02
		50#0	21.86	21.32	21.48	21.70
		50#24	21.52	21.43	22.04	21.48
		50#49	22.14	21.29	21.51	21.08
		100#0	22.13	21.36	21.45	21.03

Note: The lowest channel frequency, middle channel frequency and high channel frequency is low, middle and high test frequencies corresponding to different bandwidths within the frequency range 2555MHz~2655MHz, and the low channel frequency is 2580MHz.

LTE Band 66

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	21.75	21.51	21.82
		1#3	21.32	21.63	21.13
		1#5	22.06	21.22	21.31
		3#0	21.93	21.21	21.98
		3#1	21.57	21.27	21.33
		3#3	22.05	21.65	21.76
		6#0	21.26	21.15	21.55
	16-QAM	1#0	21.86	21.31	21.81
		1#3	21.28	21.49	21.59
		1#5	22.09	22.01	21.52
		3#0	22.10	21.63	21.92
		3#1	22.15	21.39	21.98
		3#3	21.38	21.96	21.36
		6#0	21.33	21.62	21.86
3M	QPSK	1#0	21.53	21.25	21.05
		1#7	22.10	21.16	21.76
		1#14	21.86	21.51	21.70
		8#0	21.95	21.90	21.67
		8#4	21.78	21.87	21.07
		8#7	22.09	21.21	21.84
		15#0	21.99	22.00	21.77
	16-QAM	1#0	21.93	22.08	21.58
		1#7	22.25	21.45	21.52
		1#14	21.57	21.37	22.01
		8#0	21.50	21.94	22.02
		8#4	22.19	21.39	21.94
		8#7	21.43	21.83	21.27
		15#0	21.71	22.10	21.14

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	21.34	21.93	21.37
		1#12	21.85	21.66	21.08
		1#24	21.78	21.15	21.34
		12#0	21.51	21.65	21.08
		12#6	21.90	21.52	21.51
		12#11	21.87	21.32	21.12
		25#0	21.61	21.75	21.63
	16-QAM	1#0	21.46	21.44	21.32
		1#12	21.50	21.46	21.43
		1#24	21.86	21.21	21.68
		12#0	21.87	21.58	22.01
		12#6	21.27	21.49	21.42
		12#11	22.19	21.17	21.36
		25#0	21.35	21.43	21.32
10M	QPSK	1#0	21.53	22.00	21.41
		1#24	22.14	21.60	21.73
		1#49	21.29	21.19	21.23
		25#0	21.66	21.59	21.44
		25#12	21.41	21.25	21.06
		25#24	22.14	21.54	21.18
		50#0	22.17	21.56	21.81
	16-QAM	1#0	22.10	21.22	21.36
		1#24	22.01	22.02	21.58
		1#49	21.38	21.18	21.40
		25#0	22.14	21.44	21.09
		25#12	21.53	22.05	21.20
		25#24	22.15	21.21	21.49
		50#0	22.12	21.55	21.03

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	21.43	21.49	21.18
		1#37	21.90	21.60	21.45
		1#74	21.26	21.18	21.50
		36#0	21.50	21.60	21.63
		36#17	21.69	21.98	21.03
		36#35	22.16	21.99	21.80
		75#0	21.34	21.49	21.46
	16-QAM	1#0	22.00	21.59	21.24
		1#37	21.75	21.71	21.40
		1#74	21.74	21.15	21.79
		36#0	21.87	21.84	21.30
		36#17	21.64	21.90	21.15
		36#35	21.61	21.80	21.04
		75#0	21.37	21.41	21.35
20M	QPSK	1#0	22.28	22.35	22.17
		1#49	21.39	21.34	22.01
		1#99	21.82	21.74	21.54
		50#0	21.96	22.11	22.06
		50#24	21.84	21.65	21.40
		50#49	21.30	21.80	21.12
		100#0	22.09	21.55	21.17
	16-QAM	1#0	21.27	21.52	21.58
		1#49	22.07	21.21	21.10
		1#99	22.18	21.81	21.11
		50#0	22.26	21.89	21.13
		50#24	21.63	21.79	21.69
		50#49	21.94	21.88	22.02
		100#0	21.53	21.99	21.88

WLAN 2.4G:

Mode	Channel frequency (MHz)	Data Rate	Conducted Average Output Power(dBm)
802.11b	2412	1Mbps	16.75
	2437		16.58
	2462		16.92
802.11g	2412	6Mbps	14.03
	2437		14.05
	2462		14.01
802.11n HT20	2412	MCS0	12.82
	2437		13.38
	2462		13.47
802.11n HT40	2422	MCS0	12.00
	2437		11.90
	2452		11.82

Note:

2.4G wifi duty cycle is 100%. Refer to the report for details RKSA240109002-00B

WLAN 5.2G:

Test mode	Band	Frequency (MHz)	Average Conducted Output Power (dBm)
802.11a	5150-5250 MHz	5180	11.56
		5200	11.53
		5240	11.41
802.11ac20	5150-5250 MHz	5180	11.30
		5200	11.40
		5240	11.29
802.11n-HT20	5150-5250 MHz	5180	11.39
		5200	11.30
		5240	11.40
802.11ac40	5150-5250 MHz	5190	10.50
		5230	10.21
802.11n-HT40	5150-5250 MHz	5190	10.45
		5230	10.44
802.11ac80	/	5210	8.75

Note:

5.2G wifi duty cycle is 100%. Refer to the report for details RKSA240109002-00E

WLAN 5.8G:

Test mode	Band	Frequency (MHz)	Average Conducted Output Power (dBm)
802.11a	5725-5850 MHz	5745	13.05
		5785	13.04
		5825	13.30
802.11ac20	5725-5850 MHz	5745	12.82
		5785	12.81
		5825	13.11
802.11n-HT20	5725-5850 MHz	5745	12.92
		5785	12.86
		5825	13.12
802.11ac40	5725-5850 MHz	5755	13.01
		5795	13.19
802.11n-HT40	5725-5850 MHz	5755	12.84
		5795	12.92
802.11ac80	/	5775	12.98

Note:


5.8G wifi duty cycle is 100%. Refer to the report for details RKSA240109002-00E

Bluetooth:

Mode	Channel frequency (MHz)	RF Output Power (dBm)
BDR(GFSK)	2402	8.95
	2441	9.91
	2480	9.29
EDR($\pi/4$ -DQPSK)	2402	8.72
	2441	9.18
	2480	9.63
EDR(8DPSK)	2402	8.72
	2441	9.29
	2480	9.63

Note:

Bluetooth duty cycle is 76.47%, as shown below.

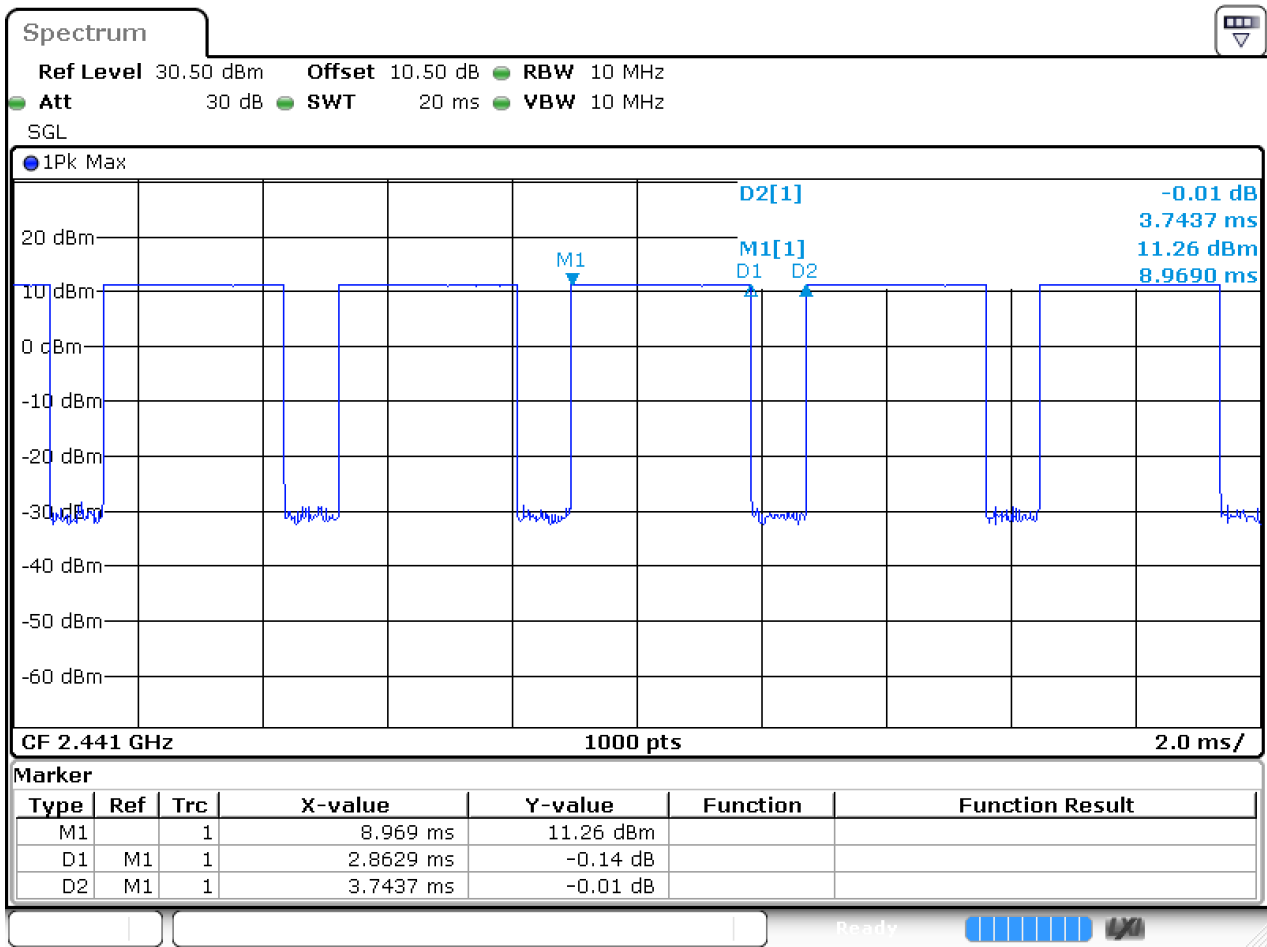

ProjectNo.:RKSA240109002 Tester:Allen Sun

Date: 4.JUL.2024 14:18:28

BLE:

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)
BLE(1Mbps) Mode		
Low	2402	-4.05
Middle	2440	-2.44
High	2480	-2.89
BLE(2Mbps) Mode		
Low	2402	-3.86
Middle	2440	-2.37
High	2480	-2.86

Note:

BLE(1Mbps) duty cycle is 67.77%. Refer to the report for details RKSA240109002-00B

BLE(2Mbps) duty cycle is 35.01%. Refer to the report for details RKSA240109002-00B

WWAN Antenna Reduction Power**GPRS:**

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	31.01	29.89	28.65	27.61
	190	836.6	31.44	29.98	28.87	27.64
	251	848.8	31.98	29.02	28.9	27.49
PCS 1900	512	1850.2	26.32	25.56	24.24	22.9
	661	1880.0	25.88	25.72	24.02	23.49
	810	1909.8	26.24	25.66	24.22	22.96

EDGE:

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	25.15	24.38	23.47	22.43
	190	836.6	25.26	24.36	23.49	22.28
	251	848.8	25.17	24.31	23.11	22.59
PCS 1900	512	1850.2	22.05	21.76	20.41	19.45
	661	1880.0	22.71	21.48	20.82	19.47
	810	1909.8	22.52	21.54	20.79	19.38

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Time based Ave. power compared to slotted Ave. power	-9 dB	-6 dB	-4.25 dB	-3 dB
Crest Factor	8	4	2.66	2

The time based average power for GPRS

Band	Channel No.	Frequency (MHz)	Time based average Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
GSM 850	128	824.2	22.01	23.89	24.4	24.61
	190	836.6	22.44	23.98	24.62	24.64
	251	848.8	22.98	23.02	24.65	24.49
PCS 1900	512	1850.2	17.32	19.56	19.99	19.9
	661	1880	16.88	19.72	19.77	20.49
	810	1909.8	17.24	19.66	19.97	19.96

The time based average power for EDGE

Band	Channel No.	Frequency (MHz)	Time based average Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
GSM 850	128	824.2	16.15	18.38	19.22	19.43
	190	836.6	16.26	18.36	19.24	19.28
	251	848.8	16.17	18.31	18.86	19.59
PCS 1900	512	1850.2	13.05	15.76	16.16	16.45
	661	1880	13.71	15.48	16.57	16.47
	810	1909.8	13.52	15.54	16.54	16.38

Note:

1. Rohde & Schwarz Radio Communication Tester (CMU200) was used for the measurement of GSM peak and average output power for active timeslots.
- 2 .For GSM voice, 1 timeslot has been activated with power level 5 (850 MHz band) and 0 (1900 MHz band).
- 3 .For GPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 3(850 MHz band) and 3(1900 MHz band).
4. According to KDB941225D01-SAR for EGPRS mode are not required when the source-based time-averaged output power for data mode is lower than that in the normal GPRS mode.

WCDMA Band II

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band II)	Normal	Rel 99	1	18.11	18.21	17.93
		HSDPA	1	18.14	18.10	18.06
			2	18.12	17.96	18.07
			3	18.09	18.03	17.96
			4	18.13	18.15	18.11
		HSUPA	1	18.20	18.14	18.12
			2	18.10	17.96	18.15
			3	18.16	18.11	18.02
			4	18.16	17.95	18.01
			5	18.10	18.14	18.15
		HSPA+	1	18.15	18.02	18.04

WCDMA Band IV

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band IV)	Normal	Rel 99	1	18.13	18.29	18.15
		HSDPA	1	18.19	18.09	18.06
			2	18.11	18.01	18.17
			3	18.13	17.93	18.12
			4	18.21	18.04	18.05
		HSUPA	1	18.17	18.14	18.13
			2	18.13	18.05	18.02
			3	18.16	17.83	18.11
			4	18.23	18.04	18.18
			5	18.13	17.84	18.06
		HSPA+	1	18.16	18.00	18.07

WCDMA Band V

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band V)	Normal	Rel 99	1	19.82	20.09	19.95
		HSDPA	1	20.03	19.76	19.86
			2	19.97	19.95	20.01
			3	19.92	19.81	20
			4	19.98	19.72	19.88
		HSUPA	1	19.94	19.82	20
			2	19.85	19.91	19.96
			3	19.99	19.99	19.95
			4	19.83	19.68	20.08
			5	19.85	19.71	19.94
		HSPA+	1	19.93	19.79	19.88

LTE Band 12

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	18.99	18.32	18.71
		1#3	18.81	18.05	17.86
		1#5	18.61	18.79	17.84
		3#0	18.45	18.31	18.74
		3#1	19.01	18.04	18.63
		3#3	18.04	18.3	18.53
		6#0	18.94	18.3	17.93
	16-QAM	1#0	18.08	18.74	18.07
		1#3	18.83	18.29	18.42
		1#5	18.71	18.82	18.39
		3#0	18.19	18.54	17.94
		3#1	18.59	18.61	18.46
		3#3	18.03	18.66	18.56
		6#0	18.83	18.82	18.35
3M	QPSK	1#0	18.44	18.88	18.82
		1#7	18.93	17.98	17.97
		1#14	18.33	18.11	18.66
		8#0	18.33	18.23	17.89
		8#4	18.37	18.28	18.08
		8#7	18.87	18.14	17.88
		15#0	18.91	18.15	17.85
	16-QAM	1#0	18.75	18.34	18.39
		1#7	18.09	18.4	18.85
		1#14	18.06	18.79	18.22
		8#0	18.43	18.75	17.8
		8#4	18.71	18.83	18.82
		8#7	18.57	18.29	18.41
		15#0	18.92	18.7	18.32

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	18.01	18.54	18.55
		1#12	18.27	18.7	17.97
		1#24	18.4	18.24	18.63
		12#0	18.4	18.19	18.32
		12#6	18.43	18.5	18.55
		12#11	18.89	18.65	18.65
		25#0	18.03	18.26	18.71
	16-QAM	1#0	18.29	18.55	18.74
		1#12	18.89	18.81	18.01
		1#24	18.03	18.76	18.12
		12#0	18.48	18.22	18.68
		12#6	18.53	18.34	18.62
		12#11	18.9	18.78	18.66
		25#0	18.62	18.62	18.28
10M	QPSK	1#0	18.5	19.06	18.97
		1#24	18.33	18.3	18.55
		1#49	18.9	18.25	18.37
		25#0	18.65	18.61	17.96
		25#12	18.76	18.81	18.51
		25#24	18.36	18.68	18.59
		50#0	18.62	18.37	18.67
	16-QAM	1#0	18.12	18.23	18.07
		1#24	18.95	18.38	18.38
		1#49	18.86	18.18	18.46
		25#0	18.72	18.76	18.04
		25#12	18.25	18.22	18.42
		25#24	18.41	18.18	18.87
		50#0	18.07	18.79	18.21

LTE Band 17

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	18.95	18.83	18.77
		1#12	18.44	18.68	18.69
		1#24	18.91	18.6	18.14
		12#0	18.66	18.78	18.15
		12#6	18.14	18.33	18.27
		12#11	18.55	18.68	17.94
		25#0	18.95	18.16	18.28
	16-QAM	1#0	18.59	18.31	18.71
		1#12	18.5	18.4	18.05
		1#24	18.49	17.98	18.13
		12#0	18.21	18.58	18.22
		12#6	18.74	18.3	18.55
		12#11	19.04	18.73	18.33
		25#0	18.49	18.63	18.67
10M	QPSK	1#0	18.3	19.09	18.47
		1#24	18.64	18.59	18.25
		1#49	18.37	18.55	18.26
		25#0	18.92	18.94	18.02
		25#12	18.85	18.61	17.77
		25#24	18.43	18.69	18.64
		50#0	18.26	18.78	18.81
	16-QAM	1#0	18.44	18.92	18.26
		1#24	18.59	18.24	18.06
		1#49	18.08	17.85	18.32
		25#0	18.8	18.38	18.58
		25#12	18.46	18.6	17.84
		25#24	18.26	18.95	17.77
		50#0	18.43	18.27	18.8

LTE Band 26

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	19.56	19.08	19.03
		1#3	19.78	19.36	18.93
		1#5	19.7	18.91	19.58
		3#0	19.24	19.64	19.7
		3#1	19.06	19.68	19.41
		3#3	19.23	19.87	19.41
		6#0	19.2	19.37	19.57
	16-QAM	1#0	19.47	19.3	19.35
		1#3	19.92	19.85	19.15
		1#5	19.5	19.28	19.82
		3#0	19.92	19.89	19.57
		3#1	19.72	19.2	19.66
		3#3	19.87	19.41	19.26
		6#0	19.57	19.06	19.39
3M	QPSK	1#0	19.37	19.14	19.09
		1#7	19.63	19.66	19.19
		1#14	19.22	19.06	19.08
		8#0	19.37	19.61	19.54
		8#4	20.13	19.15	19.85
		8#7	19.26	19.83	19.78
		15#0	19.9	19.76	19.64
	16-QAM	1#0	19.89	19.55	18.84
		1#7	19.93	19.93	19.59
		1#14	19.69	19.38	19.16
		8#0	19.67	19.45	19.22
		8#4	19.02	19.89	19.57
		8#7	19.83	19.14	19.14
		15#0	19.8	18.86	19.02

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	19.19	19.59	18.89
		1#12	19.59	19.75	19.67
		1#24	19.24	19.29	19.64
		12#0	19.78	19.51	19.36
		12#6	19.53	19.05	19.01
		12#11	20	19.09	18.87
		25#0	19.64	19.49	19.2
	16-QAM	1#0	19.4	19.21	19.15
		1#12	19.08	19.5	19.9
		1#24	19.45	19.18	19.04
		12#0	19.21	19.47	19.27
		12#6	19.3	19.45	19.42
		12#11	19.33	18.93	18.9
		25#0	19.21	19.28	19.59
10M	QPSK	1#0	19.38	19.75	19.68
		1#24	19.14	18.97	18.95
		1#49	19.72	19.14	19.47
		25#0	19.45	19.86	19.46
		25#12	19.71	19.41	19.34
		25#24	19.43	19.02	18.82
		50#0	19.81	19.85	19.08
	16-QAM	1#0	19.39	19.73	19.21
		1#24	19.97	19.56	19.71
		1#49	19.77	19.64	18.89
		25#0	19.99	18.87	19.11
		25#12	19.02	19.14	19.07
		25#24	19.13	19	19.54
		50#0	19.83	19.92	19.2

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	19.93	20.13	19.93
		1#37	19.33	19.8	19.27
		1#74	19.89	18.96	19.86
		36#0	19.95	19.9	19.64
		36#17	20.09	19.03	19.17
		36#35	19.57	18.91	19.14
		75#0	19.79	19.72	18.92
	16-QAM	1#0	20.14	19.85	19.55
		1#37	19.21	18.84	18.92
		1#74	19.63	19.66	18.78
		36#0	19.6	18.96	19.03
		36#17	19.73	19.69	19.22
		36#35	19.69	19.09	19.45
		75#0	19.16	19.39	18.96

LTE Band 5

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	19.66	19.49	19.66
		1#3	19.36	19.05	19.42
		1#5	19.33	19.52	19
		3#0	19.83	19.07	19.62
		3#1	19.23	19.83	19.74
		3#3	19.84	19.46	19.28
		6#0	19.64	18.96	19.26
	16-QAM	1#0	19.56	19.93	19.07
		1#3	19.76	19.21	19.53
		1#5	19.82	19.01	19.78
		3#0	19.6	19.7	19.08
		3#1	19.71	19.21	19.42
		3#3	19.83	19.56	19.1
		6#0	19.29	19.53	19.38
3M	QPSK	1#0	19.6	19.24	19.29
		1#7	19.54	19.31	18.95
		1#14	19.55	19.3	19.01
		8#0	19.7	19.51	19.1
		8#4	19.56	19.37	19.22
		8#7	19.76	19.69	19.78
		15#0	19.28	19.21	19.03
	16-QAM	1#0	19.81	18.99	19.53
		1#7	19.64	19.87	19.32
		1#14	19.31	19.37	19.49
		8#0	19.72	19.32	19.03
		8#4	19.79	19.11	19.62
		8#7	19.58	19.49	19.54
		15#0	19.37	19.14	19.27

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	19.2	19.23	19.59
		1#12	19.8	19.92	19.04
		1#24	19.97	19.86	18.85
		12#0	19.56	19.24	19.17
		12#6	19.07	19.5	19.14
		12#11	19.68	19.08	19.15
		25#0	19.75	19.82	19.41
	16-QAM	1#0	19.99	19.28	18.99
		1#12	19.17	18.93	19.58
		1#24	19.4	19.75	19.28
		12#0	19.84	19.34	18.95
		12#6	19.17	19.44	19.7
		12#11	19.2	18.97	18.85
		25#0	19.88	19.31	19.73
10M	QPSK	1#0	19.95	20.13	19.87
		1#24	19.56	19.51	19.26
		1#49	19.16	19.85	19.62
		25#0	19.24	19.72	19.16
		25#12	19.83	19.26	19.42
		25#24	20	19.14	18.9
		50#0	19.92	19.52	19.73
	16-QAM	1#0	19.3	19.1	18.92
		1#24	19.48	19.4	19.05
		1#49	20.06	19.86	19.01
		25#0	19.51	19.14	19.15
		25#12	19.17	19.81	19.45
		25#24	19.97	19.12	19.82
		50#0	19.7	19.21	18.76

LTE Band 2

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	18.92	19.07	18.78
		1#3	19.15	18.63	18.26
		1#5	18.35	18.20	18.67
		3#0	18.79	18.45	18.09
		3#1	18.29	18.42	18.52
		3#3	19.22	18.43	18.23
		6#0	18.49	18.81	18.83
	16-QAM	1#0	18.71	18.87	18.29
		1#3	18.39	18.26	18.46
		1#5	18.47	18.40	18.96
		3#0	19.01	18.51	18.29
		3#1	18.97	18.19	18.54
		3#3	18.99	18.53	18.74
		6#0	18.52	18.16	18.98
3M	QPSK	1#0	18.27	18.75	19.02
		1#7	19.03	18.32	18.20
		1#14	18.97	18.81	18.53
		8#0	19.11	18.34	18.97
		8#4	18.51	18.58	18.39
		8#7	18.42	18.23	18.53
		15#0	18.84	18.49	18.33
	16-QAM	1#0	18.45	18.22	18.49
		1#7	18.41	18.78	18.83
		1#14	18.59	18.87	18.76
		8#0	18.57	18.64	18.48
		8#4	18.77	18.30	18.94
		8#7	18.28	18.85	18.71
		15#0	18.41	19.01	18.38

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	18.84	19.06	18.69
		1#12	18.93	18.75	18.61
		1#24	19.22	18.69	18.15
		12#0	18.89	18.89	18.04
		12#6	18.87	18.43	18.44
		12#11	18.41	18.84	18.58
		25#0	18.73	18.20	18.30
	16-QAM	1#0	18.94	19.01	18.49
		1#12	18.29	18.74	18.84
		1#24	19.24	19.07	18.50
		12#0	18.86	18.20	18.63
		12#6	19.21	18.22	18.43
		12#11	18.73	18.32	18.88
		25#0	18.95	18.93	18.30
10M	QPSK	1#0	19.16	18.56	18.46
		1#24	18.88	18.20	18.88
		1#49	18.64	18.20	18.80
		25#0	19.02	18.86	18.30
		25#12	18.92	18.88	18.15
		25#24	19.05	18.59	18.40
		50#0	19.05	18.21	18.33
	16-QAM	1#0	18.94	18.69	18.26
		1#24	18.48	18.18	18.95
		1#49	19.16	18.32	18.10
		25#0	18.67	18.36	18.64
		25#12	18.63	18.91	18.91
		25#24	18.53	18.34	18.91
		50#0	18.80	18.64	18.83

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	18.47	18.69	18.05
		1#37	19.24	18.85	18.13
		1#74	18.34	18.94	18.74
		36#0	19.23	18.19	18.80
		36#17	18.50	18.76	18.30
		36#35	18.78	18.37	18.04
		75#0	18.38	18.16	18.41
	16-QAM	1#0	18.47	18.97	18.74
		1#37	19.25	18.14	18.29
		1#74	19.10	18.89	18.99
		36#0	18.26	18.45	18.39
		36#17	18.41	19.04	18.06
		36#35	18.50	18.31	18.68
		75#0	18.80	18.96	18.91
20M	QPSK	1#0	19.20	18.44	18.72
		1#49	18.29	18.82	18.89
		1#99	19.22	19.10	18.53
		50#0	18.85	18.38	18.97
		50#24	19.08	18.36	18.33
		50#49	19.05	18.18	18.85
		100#0	19.23	18.51	19.01
	16-QAM	1#0	18.67	18.66	18.34
		1#49	19.23	18.36	18.84
		1#99	18.96	18.33	18.73
		50#0	18.71	18.89	18.07
		50#24	18.94	18.65	18.75
		50#49	19.06	18.56	18.90
		100#0	18.35	19.07	18.80

LTE Band 4

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	18.46	18.88	18.53
		1#3	19.07	18.47	18.58
		1#5	19.08	19.06	19.02
		3#0	18.51	18.16	18.65
		3#1	18.65	18.15	18.79
		3#3	18.73	18.16	18.64
		6#0	18.31	18.81	18.77
	16-QAM	1#0	18.91	18.82	18.56
		1#3	18.74	18.53	18.23
		1#5	18.35	18.76	19.00
		3#0	18.43	18.86	18.86
		3#1	19.03	18.64	18.78
		3#3	18.56	18.95	18.57
		6#0	18.43	18.62	18.26
3M	QPSK	1#0	19.15	18.67	18.82
		1#7	18.40	18.73	18.83
		1#14	19.13	18.79	18.95
		8#0	19.25	18.98	19.01
		8#4	18.79	18.33	18.75
		8#7	18.38	18.99	18.68
		15#0	19.16	18.68	18.87
	16-QAM	1#0	18.81	18.12	18.70
		1#7	18.27	18.47	18.98
		1#14	18.84	18.45	18.79
		8#0	18.58	18.37	18.72
		8#4	19.09	19.08	18.51
		8#7	19.05	19.00	18.18
		15#0	18.94	18.76	18.25

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	19.00	18.40	19.01
		1#12	19.04	18.19	18.04
		1#24	19.11	19.11	18.69
		12#0	18.44	18.41	18.81
		12#6	19.16	18.29	18.37
		12#11	18.56	18.63	18.31
		25#0	19.09	18.61	18.05
	16-QAM	1#0	18.79	18.92	18.26
		1#12	18.29	18.91	18.62
		1#24	18.95	18.42	18.30
		12#0	18.66	18.61	18.97
		12#6	19.20	18.87	18.40
		12#11	19.04	18.31	18.35
		25#0	18.91	18.28	18.33
10M	QPSK	1#0	19.10	18.37	18.12
		1#24	19.06	18.74	18.88
		1#49	19.21	18.75	18.95
		25#0	19.11	19.01	18.57
		25#12	19.02	18.71	18.37
		25#24	18.40	18.13	18.88
		50#0	19.05	18.30	18.49
	16-QAM	1#0	18.49	18.99	18.77
		1#24	18.98	18.84	18.14
		1#49	18.67	18.97	18.27
		25#0	18.95	18.68	18.14
		25#12	18.73	18.17	18.85
		25#24	18.48	19.00	18.84
		50#0	18.84	18.93	18.85

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	18.82	18.66	18.87
		1#37	18.63	19.10	18.27
		1#74	19.12	19.09	18.05
		36#0	18.73	18.22	18.37
		36#17	18.41	18.57	18.70
		36#35	19.26	18.23	18.17
		75#0	19.25	18.95	18.90
	16-QAM	1#0	19.04	18.98	18.77
		1#37	18.64	18.77	18.56
		1#74	18.81	18.59	18.96
		36#0	18.87	18.18	18.66
		36#17	19.21	18.44	18.73
		36#35	18.66	18.66	18.16
		75#0	18.33	18.38	18.36
20M	QPSK	1#0	19.18	18.24	18.08
		1#49	18.59	18.47	18.58
		1#99	18.70	18.28	18.69
		50#0	18.80	19.05	18.46
		50#24	18.30	18.69	18.54
		50#49	18.93	18.33	18.31
		100#0	18.74	18.38	18.06
	16-QAM	1#0	18.86	18.99	18.52
		1#49	19.08	18.41	18.40
		1#99	18.30	18.82	18.36
		50#0	18.98	18.90	18.35
		50#24	18.49	18.24	18.57
		50#49	18.73	18.75	18.36
		100#0	18.58	18.32	18.72

LTE Band 7

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	13.40	13.60	13.38
		1#12	13.56	13.91	13.82
		1#24	13.39	13.17	13.56
		12#0	14.24	14.00	13.13
		12#6	13.99	13.50	13.22
		12#11	13.73	13.27	13.83
		25#0	13.43	13.36	13.05
	16-QAM	1#0	13.73	14.03	13.88
		1#12	13.64	13.58	13.50
		1#24	14.17	13.99	13.51
		12#0	13.48	14.00	13.32
		12#6	14.24	13.50	13.86
		12#11	13.68	14.10	13.49
		25#0	14.06	13.16	13.68
10M	QPSK	1#0	13.78	13.92	13.27
		1#24	13.91	13.39	13.30
		1#49	13.32	13.84	13.39
		25#0	13.98	13.14	13.63
		25#12	13.61	13.59	13.96
		25#24	14.17	13.26	13.06
		50#0	13.87	13.93	13.41
	16-QAM	1#0	13.49	13.73	13.59
		1#24	13.28	13.72	13.34
		1#49	13.43	13.19	13.95
		25#0	14.18	13.84	13.36
		25#12	14.03	13.92	13.73
		25#24	13.48	13.17	13.11
		50#0	13.45	13.37	13.39

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	13.57	13.57	13.77
		1#37	13.43	13.37	13.89
		1#74	13.58	13.39	13.71
		36#0	14.13	13.63	13.25
		36#17	13.74	13.15	13.61
		36#35	13.76	13.76	13.86
		75#0	14.12	13.89	13.32
	16-QAM	1#0	13.93	13.21	13.55
		1#37	14.22	13.28	13.76
		1#74	13.46	13.28	13.81
		36#0	14.20	13.19	13.24
		36#17	14.16	14.05	13.31
		36#35	14.20	13.80	13.10
		75#0	14.12	13.20	13.72
20M	QPSK	1#0	14.21	14.24	14.22
		1#49	13.99	13.88	13.30
		1#99	13.90	13.94	13.87
		50#0	14.16	14.23	14.14
		50#24	13.57	14.06	13.26
		50#49	13.49	13.17	13.29
		100#0	14.22	13.58	13.82
	16-QAM	1#0	13.48	14.06	13.04
		1#49	14.15	13.40	13.29
		1#99	13.32	13.13	13.08
		50#0	13.45	13.82	13.76
		50#24	14.06	13.95	13.66
		50#49	13.59	13.60	13.67
		100#0	14.00	13.39	13.64

LTE Band 25

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	19.01	18.48	18.44
		1#3	18.67	18.67	18.43
		1#5	19.06	18.29	18.61
		3#0	18.68	19.05	18.65
		3#1	19.04	18.91	18.40
		3#3	19.12	18.82	18.57
		6#0	18.80	18.83	18.28
	16-QAM	1#0	18.52	18.92	18.32
		1#3	18.61	19.03	18.32
		1#5	19.01	18.66	19.01
		3#0	18.99	18.68	18.08
		3#1	18.83	18.96	18.78
		3#3	18.97	19.02	18.94
		6#0	18.77	18.74	18.90
3M	QPSK	1#0	18.95	18.42	18.22
		1#7	18.38	18.92	18.59
		1#14	18.88	18.22	18.48
		8#0	19.01	18.21	18.48
		8#4	18.94	18.22	18.64
		8#7	19.15	18.20	18.68
		15#0	18.99	18.17	18.02
	16-QAM	1#0	18.66	18.80	18.87
		1#7	18.49	18.73	18.81
		1#14	18.89	18.37	18.17
		8#0	18.36	18.16	18.47
		8#4	18.61	18.45	18.48
		8#7	18.91	18.27	18.10
		15#0	18.97	18.99	18.71

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	18.95	19.10	18.53
		1#12	18.32	18.20	18.76
		1#24	18.61	18.60	18.89
		12#0	18.98	18.82	18.19
		12#6	18.30	18.44	18.21
		12#11	19.12	19.08	19.00
		25#0	18.45	18.72	18.83
	16-QAM	1#0	18.52	19.06	18.30
		1#12	18.66	18.81	18.67
		1#24	19.06	18.89	18.47
		12#0	18.59	18.14	18.90
		12#6	18.96	19.06	18.60
		12#11	18.65	18.21	18.36
		25#0	18.94	18.50	18.90
10M	QPSK	1#0	18.46	18.51	18.26
		1#24	19.02	18.69	18.48
		1#49	18.46	18.61	18.42
		25#0	18.97	18.41	18.78
		25#12	18.44	19.10	19.00
		25#24	18.46	18.19	18.21
		50#0	19.23	18.18	18.28
	16-QAM	1#0	19.12	18.78	18.80
		1#24	18.73	18.47	18.90
		1#49	19.18	19.07	18.23
		25#0	19.18	18.52	18.13
		25#12	19.17	19.11	18.40
		25#24	18.94	18.43	18.87
		50#0	19.22	18.66	18.08

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	18.32	18.31	18.97
		1#37	18.62	18.83	18.73
		1#74	18.75	18.83	18.71
		36#0	18.37	18.58	19.01
		36#17	18.92	18.62	18.03
		36#35	19.08	19.05	18.80
		75#0	18.49	18.88	18.17
	16-QAM	1#0	18.56	19.04	18.91
		1#37	18.34	18.69	18.85
		1#74	18.46	18.63	18.29
		36#0	19.06	18.92	18.95
		36#17	18.73	18.95	18.05
		36#35	19.10	18.30	19.01
		75#0	18.41	19.09	18.36
20M	QPSK	1#0	19.11	19.24	19.13
		1#49	18.74	18.28	18.64
		1#99	18.91	18.80	18.59
		50#0	18.81	19.06	18.86
		50#24	18.54	18.22	18.90
		50#49	18.32	18.65	18.04
		100#0	18.57	18.94	18.65
	16-QAM	1#0	18.89	18.85	18.04
		1#49	19.21	18.93	18.18
		1#99	18.86	18.75	18.62
		50#0	18.67	18.14	18.70
		50#24	19.07	18.95	18.05
		50#49	18.49	18.23	18.34
		100#0	18.74	18.27	18.53

LTE Band 40 Lower

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	17.36	17.52	17.27
		1#12	18.13	17.48	17.43
		1#24	18.25	17.44	17.53
		12#0	17.43	17.14	17.48
		12#6	17.62	17.51	17.20
		12#11	17.71	17.12	17.72
		25#0	18.18	18.07	17.27
	16-QAM	1#0	17.95	17.16	17.55
		1#12	18.13	17.38	17.48
		1#24	17.77	17.14	17.52
		12#0	17.28	17.24	17.54
		12#6	17.83	17.60	17.65
		12#11	17.63	17.99	17.29
		25#0	17.67	17.30	17.69
10M	QPSK	1#0	/	18.26	/
		1#24	/	17.43	/
		1#49	/	17.25	/
		25#0	/	17.99	/
		25#12	/	17.85	/
		25#24	/	18.08	/
		50#0	/	18.06	/
	16-QAM	1#0	/	17.55	/
		1#24	/	17.87	/
		1#49	/	17.56	/
		25#0	/	17.25	/
		25#12	/	17.41	/
		25#24	/	17.51	/
		50#0	/	17.20	/

LTE Band 40 Upper

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	17.69	18.02	17.50
		1#12	17.57	17.50	17.79
		1#24	17.61	17.13	17.45
		12#0	17.85	17.13	17.83
		12#6	17.70	17.78	17.79
		12#11	17.35	17.15	17.52
		25#0	17.83	17.25	17.23
	16-QAM	1#0	18.21	17.35	17.15
		1#12	17.63	17.99	17.36
		1#24	18.17	17.47	17.29
		12#0	17.34	17.33	17.84
		12#6	17.63	17.81	17.39
		12#11	18.06	17.38	17.34
		25#0	17.98	17.11	17.45
10M	QPSK	1#0	/	18.21	/
		1#24	/	17.80	/
		1#49	/	18.15	/
		25#0	/	18.06	/
		25#12	/	17.89	/
		25#24	/	17.19	/
		50#0	/	17.91	/
	16-QAM	1#0	/	17.73	/
		1#24	/	17.68	/
		1#49	/	17.75	/
		25#0	/	17.74	/
		25#12	/	17.50	/
		25#24	/	17.30	/
		50#0	/	17.99	/

LTE Band 41

Test Bandwidth	Test Modulation	Resource Block & RB offset	Lowest Channel (dBm)	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	18.81	19.02	18.52	18.38
		1#12	18.91	18.76	18.91	18.24
		1#24	18.92	19.08	18.07	18.83
		12#0	19.12	18.44	18.32	19.07
		12#6	18.47	18.49	18.13	18.59
		12#11	19.10	18.43	18.37	18.53
		25#0	19.10	18.17	18.24	18.33
	16-QAM	1#0	19.24	18.12	18.35	18.80
		1#12	18.80	18.36	18.97	19.05
		1#24	18.83	18.35	18.88	18.32
		12#0	18.83	19.06	18.56	18.14
		12#6	19.16	18.76	18.42	18.76
		12#11	19.11	18.37	18.73	18.41
		25#0	18.35	18.56	18.84	18.28
10M	QPSK	1#0	18.94	19.05	18.53	18.50
		1#24	18.86	18.64	18.53	18.70
		1#49	18.77	18.45	18.64	18.63
		25#0	18.37	18.98	18.50	18.79
		25#12	18.53	19.01	18.41	18.30
		25#24	18.42	18.54	18.30	18.37
		50#0	19.05	18.41	18.94	18.44
	16-QAM	1#0	19.03	18.97	18.67	18.31
		1#24	19.16	18.83	18.13	18.94
		1#49	18.71	18.60	18.47	18.34
		25#0	19.09	18.34	18.44	18.85
		25#12	19.22	18.37	18.59	18.50
		25#24	18.35	18.55	18.11	18.52
		50#0	18.40	18.64	18.45	18.71

Note: The lowest channel frequency, middle channel frequency and high channel frequency is low, middle and high test frequencies corresponding to different bandwidths within the frequency range 2555MHz~2655MHz, and the low channel frequency is 2580MHz.

Test Bandwidth	Test Modulation	Resource Block & RB offset	Lowest Channel (dBm)	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	18.77	18.35	18.11	18.98
		1#37	18.61	18.69	18.19	18.30
		1#74	18.53	18.49	18.40	18.48
		36#0	18.65	18.58	18.97	18.36
		36#17	18.28	19.01	18.94	18.54
		36#35	18.54	18.22	18.50	18.12
		75#0	19.17	18.70	18.71	18.25
	16-QAM	1#0	18.90	18.21	19.02	18.83
		1#37	18.32	18.91	18.22	18.50
		1#74	18.33	18.13	18.83	18.45
		36#0	18.43	18.75	18.96	18.41
		36#17	19.09	18.40	18.32	19.04
		36#35	19.13	18.39	18.42	18.81
		75#0	18.36	18.51	18.52	18.94
20M	QPSK	1#0	19.11	19.19	19.25	19.07
		1#49	18.34	18.23	18.90	18.54
		1#99	18.92	19.02	18.50	18.34
		50#0	19.14	19.16	19.20	19.10
		50#24	19.14	18.14	18.38	18.82
		50#49	19.12	18.63	18.14	18.85
		100#0	18.33	18.23	18.56	18.72
	16-QAM	1#0	18.53	18.77	18.88	18.15
		1#49	18.33	18.35	19.02	18.86
		1#99	18.90	18.66	18.66	18.15
		50#0	18.58	18.25	18.57	18.62
		50#24	18.36	18.27	18.74	19.00
		50#49	18.64	18.53	18.06	18.48
		100#0	19.06	19.05	18.41	18.25

Note: The lowest channel frequency, middle channel frequency and high channel frequency is low, middle and high test frequencies corresponding to different bandwidths within the frequency range 2555MHz~2655MHz, and the low channel frequency is 2580MHz.

LTE Band 66

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	18.31	18.96	18.27
		1#3	18.53	18.77	18.34
		1#5	19.23	18.30	18.18
		3#0	18.90	18.58	18.27
		3#1	19.25	18.38	18.71
		3#3	18.96	18.86	18.25
		6#0	19.06	18.23	19.02
	16-QAM	1#0	19.15	18.64	19.02
		1#3	18.36	18.96	18.65
		1#5	18.96	18.90	18.60
		3#0	18.84	18.15	18.96
		3#1	18.61	18.34	18.30
		3#3	19.17	18.24	18.91
		6#0	18.79	18.46	18.87
3M	QPSK	1#0	18.36	18.94	18.65
		1#7	18.43	18.99	18.54
		1#14	18.27	18.70	19.00
		8#0	19.06	18.40	18.34
		8#4	18.83	18.25	18.10
		8#7	18.43	19.11	18.27
		15#0	18.47	18.55	18.94
	16-QAM	1#0	18.26	18.18	18.46
		1#7	18.43	18.12	18.08
		1#14	18.66	18.89	18.73
		8#0	19.23	19.03	18.61
		8#4	18.37	18.11	18.22
		8#7	18.75	18.74	18.65
		15#0	18.85	18.20	18.50

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	19.12	18.13	18.95
		1#12	19.09	18.67	18.21
		1#24	18.74	18.86	18.69
		12#0	18.38	18.98	18.86
		12#6	18.72	18.25	18.36
		12#11	18.28	18.17	19.00
		25#0	18.99	18.66	18.42
	16-QAM	1#0	18.97	18.58	18.06
		1#12	19.01	19.03	18.34
		1#24	18.96	18.48	18.43
		12#0	18.39	18.17	18.30
		12#6	18.74	18.79	18.92
		12#11	18.60	18.49	18.46
		25#0	18.68	18.31	18.95
10M	QPSK	1#0	19.13	18.36	18.66
		1#24	18.62	18.97	18.58
		1#49	19.07	18.16	18.72
		25#0	18.52	19.09	18.83
		25#12	18.60	18.31	18.67
		25#24	18.59	18.56	18.56
		50#0	18.63	18.16	18.51
	16-QAM	1#0	18.33	18.89	18.26
		1#24	18.95	18.73	18.05
		1#49	18.49	18.98	18.03
		25#0	18.74	18.46	18.18
		25#12	18.87	19.00	18.60
		25#24	18.38	18.85	18.20
		50#0	19.09	18.49	18.23

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	18.79	18.95	18.53
		1#37	18.72	18.83	18.26
		1#74	18.90	18.44	18.17
		36#0	18.62	18.81	18.30
		36#17	18.28	18.96	18.04
		36#35	18.52	18.67	18.06
		75#0	18.73	18.40	18.32
	16-QAM	1#0	18.73	18.15	18.19
		1#37	18.33	18.73	18.96
		1#74	18.95	18.54	18.64
		36#0	19.15	18.62	18.56
		36#17	19.14	18.57	18.33
		36#35	18.40	18.57	18.24
		75#0	18.88	18.29	18.78
20M	QPSK	1#0	19.21	19.39	19.28
		1#49	19.05	19.09	18.14
		1#99	18.37	18.68	18.97
		50#0	19.20	19.33	19.10
		50#24	19.00	18.17	18.80
		50#49	18.62	18.30	18.72
		100#0	18.81	18.97	18.74
	16-QAM	1#0	18.74	19.06	18.53
		1#49	18.73	18.69	18.33
		1#99	18.99	18.14	18.93
		50#0	19.07	18.88	18.44
		50#24	18.62	18.19	18.47
		50#49	19.24	18.33	18.21
		100#0	18.97	18.57	18.21

WLAN 5.2G:

Test mode	Band	Frequency (MHz)	Average Conducted Output Power (dBm)
802.11a	5150-5250 MHz	5180	8.68
		5200	8.56
		5240	8.39
802.11ac20	5150-5250 MHz	5180	8.35
		5200	8.30
		5240	8.22
802.11n-HT20	5150-5250 MHz	5180	8.31
		5200	8.29
		5240	8.36
802.11ac40	5150-5250 MHz	5190	7.53
		5230	7.20
802.11n-HT40	5150-5250 MHz	5190	7.34
		5230	7.38
802.11ac80	/	5210	5.71

Note :

1.The maximum antenna gain is 2 dBi.

WLAN 5.8G:


Test mode	Band	Frequency (MHz)	Average Conducted Output Power (dBm)
802.11a	5725-5850 MHz	5745	7.26
		5785	7.18
		5825	7.41
802.11ac20	5725-5850 MHz	5745	6.94
		5785	6.87
		5825	7.05
802.11n-HT20	5725-5850 MHz	5745	6.86
		5785	6.74
		5825	7.10
802.11ac40	5725-5850 MHz	5755	7.05
		5795	7.21
802.11n-HT40	5725-5850 MHz	5755	6.91
		5795	6.99
802.11ac80	/	5775	7.01

Note :

1.The maximum antenna gain is 2 dBi.

Standalone SAR test exclusion considerations

Antennas Location:

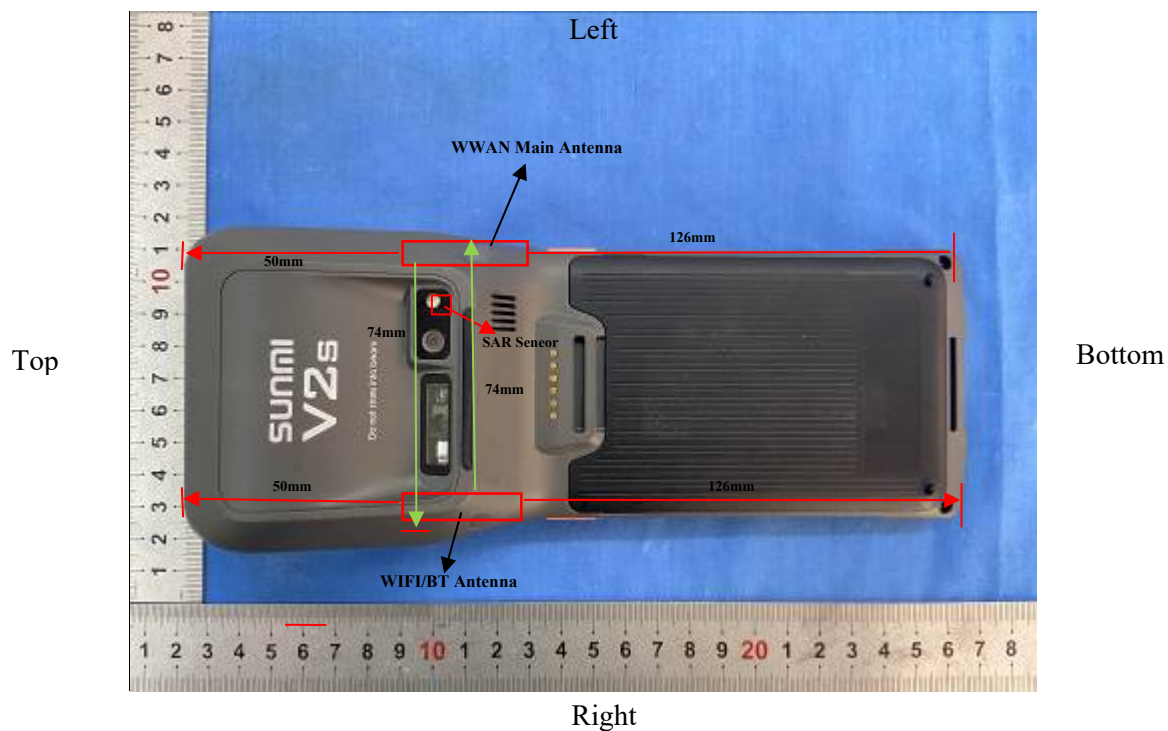

Antenna Distance To Edge

Antenna	Antenna Distance To Edge(mm)					
	Back	Front	Left	Right	Top	Bottom
WWAN Main	<5	<5	<5	74	50	126
WIFI/BT	<5	<5	74	<5	50	126

Note: The Main antenna has transmitting and receiving functions, while the DIV antenna only has receiving functions

Standalone SAR test exclusion considerations

Mode	Frequency (MHz)	Pavg (dBm)	Pavg (mW)	Test Exclusion Distance(mm)
GSM 850	848.8	30.0	1000	197.95
GSM 1900	1909.8	27.0	501.19	89.26
WCDMA 2	1907.6	22.5	177.83	56.92
WCDMA 4	1752.6	22.5	177.83	56.45
WCDMA 5	846.6	22.5	177.83	52.62
LTE Band 25/2	1905	22.5	177.83	56.91
LTE Band 66/4	1770	22.5	177.83	56.51
LTE Band 7	2560	22.5	177.83	58.4
LTE Band 12/17	711	22.5	177.83	49.98
LTE Band 26/5	841.5	22.5	177.83	52.55
LTE Band 40-Lower	2310	22.5	177.83	57.91
LTE Band 40-Upper	2355	22.5	177.83	58
LTE Band 41	2680	22.5	177.83	58.62
WLAN 2.4G Antenna	2462	17.0	50.12	26.21
WLAN 5.2G Antenna	5240	12.0	15.85	12.09
WLAN 5.8G Antenna	5825	13.5	22.39	18.01
Bluetooth	2480	10.0	10	5.25
BLE(1Mbps)	2480	-2	0.63	0.33
BLE(2Mbps)	2480	-2	0.63	0.33

SAR test exclusion for the EUT edge considerations Result

Mode	Back	Front	Left	Right	Top	Bottom
GSM 850	Required	Required	Required	Required	Required	Required
GSM 1900	Required	Required	Required	Required	Required	Exclusion
WCDMA 2	Required	Required	Required	Exclusion	Required	Exclusion
WCDMA 4	Required	Required	Required	Exclusion	Required	Exclusion
WCDMA 5	Required	Required	Required	Exclusion	Required	Exclusion
LTE Band 25/2	Required	Required	Required	Exclusion	Required	Exclusion
LTE Band 66/4	Required	Required	Required	Exclusion	Required	Exclusion
LTE Band 7	Required	Required	Required	Exclusion	Required	Exclusion
LTE Band 12/17	Required	Required	Required	Exclusion	Exclusion	Exclusion
LTE Band 26/5	Required	Required	Required	Exclusion	Required	Exclusion
LTE Band 40-Lower	Required	Required	Required	Exclusion	Required	Exclusion
LTE Band 40-Upper	Required	Required	Required	Exclusion	Required	Exclusion
LTE Band 41	Required	Required	Required	Exclusion	Required	Exclusion
WLAN 2.4G Antenna	Required	Required	Exclusion	Required	Exclusion	Exclusion
WLAN 5.2G Antenna	Required	Required	Exclusion	Required	Exclusion	Exclusion
WLAN 5.8G Antenna	Required	Required	Exclusion	Required	Exclusion	Exclusion
Bluetooth	Required	Required	Exclusion	Required	Exclusion	Exclusion
BLE(1Mbps)	Exclusion	Exclusion	Exclusion	Exclusion	Exclusion	Exclusion
BLE(2Mbps)	Exclusion	Exclusion	Exclusion	Exclusion	Exclusion	Exclusion

Distance< 50mm(To Edges)

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.

2. Power and distance are rounded to the nearest mW and mm before calculation.

3. The result is rounded to one decimal place for comparison.

4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

5. The Time based average Power is used for calculation

Distance> 50mm(To Edges)

At 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following:

a) $[\text{Power allowed at numeric threshold for 50 mm in step 1}) + (\text{test separation distance} - 50 \text{ mm}) \cdot (f(\text{MHz})/150)]$ mW, at 100 MHz to 1500 MHz

b) $[\text{Power allowed at numeric threshold for 50 mm in step 1}) + (\text{test separation distance} - 50 \text{ mm}) \cdot 10]$ mW at > 1500 MHz and ≤ 6 GHz.

According to KDB447498 D01 General RF Exposure Guidance v06: 4.3. General SAR test exclusion guidance

c) For frequencies below 100 MHz, the following may be considered for SAR test exclusion (also illustrated in Appendix C):

- 1) For test separation distances > 50 mm and < 200 mm, the power threshold at the corresponding test separation distance at 100 MHz in step b) is multiplied by $[1 + \log(100/f(\text{MHz}))]$
- 2) For test separation distances ≤ 50 mm, the power threshold determined by the equation in c) 1) for 50 mm and 100 MHz is multiplied by $\frac{1}{2}$
- 3) SAR measurement procedures are not established below 100 MHz

Measurement Result:

For NFC, the power of EUT: E-Field@3m is 76.36 dBuV/m = -18.84dBm (0.01mW)

Note: $E[\text{dB } \mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2$ for $d = 3$ m.

SAR test exclusion threshold for NFC(13.56MHz) separation distance < 50 mm

$$= [474 * (1 + \log(100/f(\text{MHz}))) / 2]$$

$$= 443\text{mW}$$

$$> 0.01 \text{ mW}$$

Conclusion:

The NFC SAR evaluation can be exempted.

Note:

For NFC, please refer to report RKSA240109002-00F

SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

SAR Test Data

Environmental Conditions

Temperature:	22.4-23.2 °C	22.5-23.4 °C	22.8-23.5 °C	22.3-23.4 °C	22.6-23.4 °C
Relative Humidity:	52 %	51 %	47%	49 %	51 %
Test Date:	2024/04/18	2024/04/19	2024/04/20	2024/04/21	2024/04/22
Temperature:	22.6-23.4 °C	22.4-23.6 °C	22.5-23.8 °C		
Relative Humidity:	51 %	53 %	48 %		
Test Date:	2024/04/23	2024/04/24	2024/04/25		

Testing was performed by Allen and Jason

GSM 850 :

EUT Position	Frequency (MHz)	Test Mode	SENSOR	Max Power (dBm)		Scaled Factor	1g SAR (W/kg)			Plot
				Meas.	Rated		Meas.	Rated	Limit	
Body-Front (0mm)	836.6	GPRS4TX	On	27.64	28.00	1.086	0.469	0.510	1.6	1#
Body-Back (0mm)	836.6	GPRS4TX	On	/	/	/	/	/	/	/
Body-Left (0mm)	836.6	GPRS4TX	On	27.64	28.00	1.086	0.525	0.570	1.6	2#
Body-Left (0mm)	824.2	GPRS4TX	On	27.61	28.00	1.094	0.511	0.559	1.6	3#
Body-Left (0mm)	848.8	GPRS4TX	On	27.49	28.00	1.125	0.588	0.661	1.6	4#
Body-Right (0mm)	836.6	GPRS4TX	Off	/	/	/	/	/	/	/
Body-Top (0mm)	836.6	GPRS4TX	Off	/	/	/	/	/	/	/
Body-Bottom (0mm)	836.6	GPRS4TX	Off	/	/	/	/	/	/	/
Body-Front (4mm)	836.6	GPRS4TX	Off	29.66	30.00	1.081	0.230	0.249	1.6	162#
Body-Back (4mm)	836.6	GPRS4TX	Off	/	/	/	/	/	/	/
Body-Left (19mm)	836.6	GPRS4TX	Off	/	/	/	/	/	/	/

GSM 1900 :

EUT Position	Frequency (MHz)	Test Mode	SENSOR	Max Power (dBm)		Scaled Factor	1g SAR (W/kg)			Plot
				Meas.	Rated		Meas.	Rated	Limit	
Body-Front (0mm)	1880	GPRS4TX	On	23.49	24.00	1.125	0.164	0.184	1.6	5#
Body-Back (0mm)	1880	GPRS4TX	On	/	/	/	/	/	/	/
Body-Left (0mm)	1880	GPRS4TX	On	23.49	24.00	1.125	0.683	0.768	1.6	6#
Body-Left (0mm)	1850.2	GPRS4TX	On	22.90	23.50	1.148	0.629	0.722	1.6	7#
Body-Left (0mm)	1909.8	GPRS4TX	On	22.96	23.50	1.132	0.718	0.813	1.6	8#
Body-Right (0mm)	1880	GPRS4TX	Off	/	/	/	/	/	/	/
Body-Top (0mm)	1880	GPRS4TX	Off	/	/	/	/	/	/	/
Body-Bottom (0mm)	1880	GPRS4TX	Off	/	/	/	/	/	/	/
Body-Front (4mm)	1880	GPRS4TX	Off	26.68	27.00	1.076	0.113	0.122	1.6	163#
Body-Back (4mm)	1880	GPRS4TX	Off	/	/	/	/	/	/	/
Body-Left (19mm)	1880	GPRS4TX	Off	/	/	/	/	/	/	/

WCDMA Band II :

EUT Position	Frequency (MHz)	Test Mode	SENSOR	Max Power (dBm)		Scaled Factor	1g SAR (W/kg)			Plot
				Meas.	Rated		Meas.	Rated	Limit	
Body-Front (0mm)	1880	RMC	On	18.21	18.50	1.069	0.162	0.173	1.6	9#
Body-Back (0mm)	1880	RMC	On	/	/	/	/	/	/	/
Body-Left (0mm)	1880	RMC	On	18.21	18.50	1.069	0.739	0.790	1.6	10#
Body-Left (0mm)	1852.4	RMC	On	18.11	18.50	1.094	0.759	0.830	1.6	11#
Body-Left (0mm)	1907.6	RMC	On	17.93	18.50	1.140	0.701	0.799	1.6	12#
Body-Front (4mm)	1880	RMC	Off	22.19	22.50	1.074	0.120	0.129	1.6	164#
Body-Back (4mm)	1880	RMC	Off	/	/	/	/	/	/	/
Body-Left (19mm)	1880	RMC	Off	/	/	/	/	/	/	/

WCDMA Band IV :

EUT Position	Frequency (MHz)	Test Mode	SENSOR	Max Power (dBm)		Scaled Factor	1g SAR (W/kg)			Plot
				Meas.	Rated		Meas.	Rated	Limit	
Body-Front (0mm)	1732.6	RMC	ON	18.29	18.50	1.050	0.228	0.239	1.6	13#
Body-Back (0mm)	1732.6	RMC	ON	/	/	/	/	/	/	/
Body-Left (0mm)	1732.6	RMC	ON	18.29	18.50	1.050	0.958	1.005	1.6	14#
Body-Left (0mm)	1712.4	RMC	ON	18.13	18.50	1.089	0.926	1.008	1.6	15#
Body-Left (0mm)	1752.6	RMC	ON	18.15	18.50	1.084	0.878	0.952	1.6	16#
Body-Right (0mm)	1732.6	RMC	OFF	/	/	/	/	/	/	/
Body-Top (0mm)	1732.6	RMC	OFF	/	/	/	/	/	/	/
Body-Bottom (0mm)	1732.6	RMC	OFF	/	/	/	/	/	/	/
Body-Front (4mm)	1732.6	RMC	OFF	22.34	22.50	1.038	0.149	0.155	1.6	165#
Body-Back (4mm)	1732.6	RMC	OFF	/	/	/	/	/	/	/
Body-Left (19mm)	1732.6	RMC	OFF	/	/	/	/	/	/	/

WCDMA Band V :

EUT Position	Frequency (MHz)	Test Mode	SENSOR	Max Power (dBm)		Scaled Factor	1g SAR (W/kg)			Plot
				Meas.	Rated		Meas.	Rated	Limit	
Body-Front (0mm)	836.6	RMC	ON	20.09	20.50	1.099	0.473	0.520	1.6	17#
Body-Back (0mm)	836.6	RMC	ON	20.09	20.50	1.099	0.267	0.293	1.6	18#
Body-Left (0mm)	836.6	RMC	ON	20.09	20.50	1.099	0.728	0.800	1.6	19#
Body-Left (0mm)	826.4	RMC	ON	19.82	20.50	1.169	0.694	0.812	1.6	20#
Body-Left (0mm)	846.6	RMC	ON	19.95	20.50	1.135	0.765	0.868	1.6	21#
Body-Right (0mm)	836.6	RMC	OFF	22.16	22.50	1.081	0.170	0.184	1.6	22#
Body-Top (0mm)	836.6	RMC	OFF	22.16	22.50	1.081	0.043	0.065	1.6	23#
Body-Bottom (0mm)	836.6	RMC	OFF	22.16	22.50	1.081	0.060	0.263	1.6	24#
Body-Front (4mm)	836.6	RMC	OFF	22.16	22.50	1.081	0.243	0.263	1.6	25#
Body-Back (4mm)	836.6	RMC	OFF	22.16	22.50	1.081	0.236	0.255	1.6	26#
Body-Left (19mm)	836.6	RMC	OFF	22.16	22.50	1.081	0.168	0.182	1.6	27#

LTE Band 7 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	RB	SENSOR	Max Power (dBm)		Scaled Factor	1g SAR (W/kg)			Plot
					Meas.	Rated		Meas.	Rated	Limit	
Body-Front (0mm)	2535	20	1RB	On	14.24	14.50	1.062	0.234	0.248	1.6	88#
	2535	20	50%RB	On	14.23	14.50	1.064	0.189	0.201	1.6	89#
Body-Back (0mm)	2535	20	1RB	On	/	/	/	/	/	1.6	/
	2535	20	50%RB	On	/	/	/	/	/	1.6	/
Body-Left (0mm)	2535	20	1RB	On	14.24	14.50	1.062	0.944	1.002	1.6	90#
	2510	20	1RB	On	14.21	14.50	1.069	1.040	1.112	1.6	91#
	2560	20	1RB	On	14.22	14.50	1.067	1.000	1.067	1.6	92#
	2535	20	50%RB	On	14.23	14.50	1.064	0.787	0.837	1.6	93#
	2510	20	50%RB	On	14.16	14.50	1.081	0.812	0.878	1.6	94#
	2560	20	50%RB	On	14.14	14.50	1.086	0.883	0.959	1.6	95#
	2535	20	100%RB	On	13.58	14.50	1.236	0.802	0.991	1.6	96#
Body-Front (4mm)	2535	20	1RB	Off	22.21	22.50	1.069	0.122	0.130	1.6	166#
	2535	20	50%RB	Off	21.99	22.50	1.125	0.099	0.111	1.6	167#
Body-Back (4mm)	2535	20	1RB	Off	/	/	/	/	/	1.6	/
	2535	20	50%RB	Off	/	/	/	/	/	1.6	/
Body-Left (19mm)	2535	20	1RB	Off	/	/	/	/	/	1.6	/
	2535	20	50%RB	Off	/	/	/	/	/	1.6	/

LTE FDD Band 12& LTE FDD Band 17:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	RB	SENSOR	Max Power (dBm)		Scaled Factor	1g SAR (W/kg)			Plot
					Meas.	Rated		Meas.	Rated	Limit	
Body-Front (0mm)	707.5	10	1RB	On	19.06	19.50	1.107	0.327	0.362	1.6	48#
	707.5	10	50%RB	On	18.61	19.50	1.227	0.267	0.328	1.6	49#
Body-Back (0mm)	707.5	10	1RB	On	19.06	19.50	1.107	0.312	0.345	1.6	50#
	707.5	10	50%RB	On	18.61	19.50	1.227	0.265	0.325	1.6	51#
Body-Left (0mm)	707.5	10	1RB	On	19.06	19.50	1.107	0.468	0.518	1.6	52#
	704	10	1RB	On	18.50	19.50	1.259	0.468	0.589	1.6	53#
	711	10	1RB	On	18.97	19.50	1.130	0.460	0.520	1.6	54#
	707.5	10	50%RB	On	18.61	19.50	1.227	0.374	0.459	1.6	55#
Body-Right (0mm)	707.5	10	1RB	Off	22.24	22.50	1.062	0.053	0.056	1.6	56#
	707.5	10	50%RB	Off	21.86	22.50	1.159	0.050	0.057	1.6	57#
Body-Top (0mm)	707.5	10	1RB	Off	22.24	22.50	1.062	0.028	0.026	1.6	58#
	707.5	10	50%RB	Off	21.86	22.50	1.159	0.022	0.025	1.6	59#
Body-Bottom (0mm)	707.5	10	1RB	Off	22.24	22.50	1.062	0.024	0.262	1.6	60#
	707.5	10	50%RB	Off	21.86	22.50	1.159	0.021	0.229	1.6	61#
Body-Front (4mm)	707.5	10	1RB	Off	22.24	22.50	1.062	0.247	0.262	1.6	62#
	707.5	10	50%RB	Off	21.86	22.50	1.159	0.198	0.229	1.6	63#
Body-Back (4mm)	707.5	10	1RB	Off	22.24	22.50	1.062	0.314	0.333	1.6	64#
	707.5	10	50%RB	Off	21.86	22.50	1.159	0.249	0.289	1.6	65#
Body-Left (19mm)	707.5	10	1RB	Off	22.24	22.50	1.062	0.111	0.118	1.6	66#
	707.5	10	50%RB	Off	21.86	22.50	1.159	0.095	0.110	1.6	67#

Note:

LTE FDD Band 12 and LTE FDD Band 17 have the same power, we only tested the LTE Band 12 because it has a larger frequency range, so the LTE FDD Band 17 does not need to be tested

LTE Band 25 & LTE Band 2 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	RB	SENSOR	Max Power (dBm)		Scaled Factor	1g SAR (W/kg)			Plot
					Meas.	Rated		Meas.	Rated	Limit	
Body-Front (0mm)	1880	20	1RB	On	19.24	19.50	1.062	0.156	0.166	1.6	97#
	1880	20	50%RB	On	19.06	19.50	1.107	0.125	0.138	1.6	98#
Body-Back (0mm)	1880	20	1RB	On	/	/	/	/	/	1.6	/
	1880	20	50%RB	On	/	/	/	/	/	1.6	/
Body-Left (0mm)	1880	20	1RB	On	19.24	19.50	1.062	0.811	0.861	1.6	99#
	1860	20	1RB	On	19.11	19.50	1.094	0.839	0.918	1.6	100#
	1905	20	1RB	On	19.13	19.50	1.089	0.780	0.849	1.6	101#
	1880	20	50%RB	On	19.06	19.50	1.107	0.657	0.727	1.6	102#
	1860	20	50%RB	On	18.81	19.50	1.172	0.727	0.852	1.6	103#
	1905	20	50%RB	On	18.86	19.50	1.159	0.685	0.794	1.6	104#
	1880	20	100%RB	On	18.94	19.50	1.138	0.680	0.774	1.6	105#
Body-Front (4mm)	1880	20	1RB	Off	22.25	22.50	1.059	0.083	0.088	1.6	168#
	1880	20	50%RB	Off	22.14	22.50	1.086	0.076	0.082	1.6	169#
Body-Back (4mm)	1880	20	1RB	Off	/	/	/	/	/	1.6	/
	1880	20	50%RB	Off	/	/	/	/	/	1.6	/
Body-Left (19mm)	1880	20	1RB	Off	/	/	/	/	/	1.6	/
	1880	20	50%RB	Off	/	/	/	/	/	1.6	/

Note:

LTE FDD Band 25 and LTE FDD Band 2 have the same power, we only tested the LTE Band 25 because it has a larger frequency range, so the LTE FDD Band 2 does not need to be tested

LTE Band 26 & LTE Band 5 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	RB	SENSOR	Max Power (dBm)		Scaled Factor	1g SAR (W/kg)			Plot
					Meas.	Rated		Meas.	Rated	Limit	
Body-Front (0mm)	831.5	15	1RB	On	20.13	20.50	1.089	0.327	0.356	1.6	68#
	831.5	15	50%RB	On	19.90	20.50	1.148	0.268	0.308	1.6	69#
Body-Back (0mm)	831.5	15	1RB	On	20.13	20.50	1.089	0.075	0.081	1.6	70#
	831.5	15	50%RB	On	19.90	20.50	1.148	0.076	0.087	1.6	71#
Body-Left (0mm)	831.5	15	1RB	On	20.13	20.50	1.089	0.491	0.535	1.6	72#
	821.5	15	1RB	On	19.93	20.50	1.140	0.462	0.527	1.6	73#
	841.5	15	1RB	On	19.93	20.50	1.140	0.509	0.580	1.6	74#
	831.5	15	50%RB	On	19.90	20.50	1.148	0.412	0.473	1.6	75#
Body-Right (0mm)	831.5	15	1RB	Off	22.26	22.50	1.057	0.089	0.094	1.6	76#
	831.5	15	50%RB	Off	22.18	22.50	1.076	0.073	0.079	1.6	77#
Body-Top (0mm)	831.5	15	1RB	Off	22.26	22.50	1.057	0.026	0.039	1.6	78#
	831.5	15	50%RB	Off	22.18	22.50	1.076	0.021	0.032	1.6	79#
Body-Bottom (0mm)	831.5	15	1RB	Off	22.26	22.50	1.057	0.037	0.203	1.6	80#
	831.5	15	50%RB	Off	22.18	22.50	1.076	0.030	0.167	1.6	81#
Body-Front (4mm)	831.5	15	1RB	Off	22.26	22.50	1.057	0.192	0.203	1.6	82#
	831.5	15	50%RB	Off	22.18	22.50	1.076	0.155	0.167	1.6	83#
Body-Back (4mm)	831.5	15	1RB	Off	22.26	22.50	1.057	0.188	0.199	1.6	84#
	831.5	15	50%RB	Off	22.18	22.50	1.076	0.152	0.164	1.6	85#
Body-Left (19mm)	831.5	15	1RB	Off	22.26	22.50	1.057	0.104	0.110	1.6	86#
	831.5	15	50%RB	Off	22.18	22.50	1.076	0.082	0.088	1.6	87#

Note:

LTE FDD Band 26 and LTE FDD Band 5 have the same power, we only tested the LTE Band 26 because it has a larger frequency range, so the LTE FDD Band 5 does not need to be tested

LTE FDD Band 66&TE FDD Band 4

EUT Position	Frequency (MHz)	Bandwidth (MHz)	RB	SENSOR	Max Power (dBm)		Scaled Factor	1g SAR (W/kg)			Plot
					Meas.	Rated		Meas.	Rated	Limit	
Body-Front (0mm)	1745	20	1RB	On	19.39	19.50	1.026	0.222	0.228	1.6	116#
	1745	20	50%RB	On	19.33	19.50	1.040	0.187	0.194	1.6	117#
Body-Back (0mm)	1745	20	1RB	On	/	/	/	/	/	1.6	/
	1745	20	50%RB	On	/	/	/	/	/	1.6	/
Body-Left (0mm)	1745	20	1RB	On	19.39	19.50	1.026	0.955	0.979	1.6	118#
	1720	20	1RB	On	19.21	19.50	1.069	0.924	0.988	1.6	119#
	1770	20	1RB	On	19.28	19.50	1.052	0.977	1.028	1.6	120#
	1745	20	50%RB	On	19.33	19.50	1.040	0.816	0.849	1.6	121#
	1720	20	50%RB	On	19.20	19.50	1.072	0.803	0.860	1.6	122#
	1770	20	50%RB	On	19.10	19.50	1.096	0.829	0.909	1.6	123#
	1745	20	100%RB	On	18.97	19.50	1.130	0.802	0.906	1.6	124#
Body-Front (4mm)	1745	20	1RB	Off	22.35	22.50	1.035	0.132	0.137	1.6	174#
	1745	20	50%RB	Off	22.11	22.50	1.094	0.112	0.123	1.6	175#
Body-Back (4mm)	1745	20	1RB	Off	/	/	/	/	/	1.6	/
	1745	20	50%RB	Off	/	/	/	/	/	1.6	/
Body-Left (19mm)	1745	20	1RB	Off	/	/	/	/	/	1.6	/
	1745	20	50%RB	Off	/	/	/	/	/	1.6	/

Note:

LTE FDD Band 66 and LTE FDD Band 4 have the same power, we only tested the LTE Band 66 because it has a larger frequency range, so the LTE FDD Band 4 does not need to be tested

LTE TDD Band 40 - Low:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	RB	SENSOR	Max Power (dBm)		Scale Factor	Duct Cycle Factor	1g SAR (W/kg)			Plot
					Measured	Rated			Measured	Rated	Limit	
Body-Front (0mm)	2310	10	1RB	On	18.26	18.50	1.057	3.092	0.090	0.095	1.6	106#
	2310	10	50%RB	On	17.99	18.50	1.125	3.092	0.092	0.103	1.6	107#
Body-Back (0mm)	2310	10	1RB	On	/	/	/		/	/	1.6	/
	2310	10	50%RB	On	/	/	/		/	/	1.6	/
Body-Left (0mm)	2310	10	1RB	On	18.26	18.50	1.057	3.092	1.010	1.067	1.6	108#
	2310	10	50%RB	On	17.99	18.50	1.125	3.092	0.807	0.908	1.6	109#
	2310	10	100%RB	On	18.06	18.50	1.107	3.092	0.806	0.892	1.6	110#
Body-Front (4mm)	2310	10	1RB	Off	22.16	22.50	1.081	3.092	0.204	0.221	1.6	170#
	2310	10	50%RB	Off	22.06	22.50	1.107	3.092	0.162	0.179	1.6	171#
Body-Back (4mm)	2310	10	1RB	Off	/	/	/		/	/	1.6	/
	2310	10	50%RB	Off	/	/	/		/	/	1.6	/
Body-Left (19mm)	2310	10	1RB	Off	/	/	/		/	/	1.6	/
	2310	10	50%RB	Off	/	/	/		/	/	1.6	/

LTE TDD Band 40 - upper:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	RB	SENSOR	Max Power (dBm)		Scale Factor	Duct Cycle Factor	1g SAR (W/kg)			Plot
					Measured	Rated			Measured	Rated	Limit	
Body-Front (0mm)	2355	10	1RB	On	18.21	18.50	1.069	3.193	0.095	0.102	1.6	111#
	2355	10	50%RB	On	18.06	18.50	1.107	3.193	0.097	0.108	1.6	112#
Body-Back (0mm)	2355	10	1RB	On	/	/	/		/	/	1.6	/
	2355	10	50%RB	On	/	/	/		/	/	1.6	/
Body-Left (0mm)	2355	10	1RB	On	18.21	18.50	1.069	3.193	1.010	1.080	1.6	113#
	2355	10	50%RB	On	18.06	18.50	1.107	3.193	0.839	0.928	1.6	114#
	2355	10	100%RB	On	17.91	18.50	1.146	3.193	0.841	0.963	1.6	115#
Body-Front (4mm)	2355	10	1RB	Off	22.25	22.50	1.059	3.193	0.213	0.226	1.6	172#
	2355	10	50%RB	Off	22.14	22.50	1.086	3.193	0.168	0.183	1.6	173#
Body-Back (4mm)	2355	10	1RB	Off	/	/	/		/	/	1.6	/
	2355	10	50%RB	Off	/	/	/		/	/	1.6	/
Body-Left (19mm)	2355	10	1RB	Off	/	/	/		/	/	1.6	/
	2355	10	50%RB	Off	/	/	/		/	/	1.6	/

LTE Band 41 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	RB	SENSOR	Max Power (dBm)		Scaled Factor	1g SAR (W/kg)			Plot
					Meas.	Rated		Meas.	Rated	Limit	
Body-Front (0mm)	2605	20	1RB	On	19.25	19.50	1.059	0.135	0.143	1.6	134#
	2605	20	50%RB	On	19.20	19.50	1.072	0.105	0.113	1.6	135#
Body-Back (0mm)	2605	20	1RB	On	/	/	/	/	/	1.6	/
	2605	20	50%RB	On	/	/	/	/	/	1.6	/
Body-Left (0mm)	2605	20	1RB	On	19.25	19.50	1.059	0.895	0.948	1.6	136#
	2565	20	1RB	On	19.11	19.50	1.094	0.916	1.002	1.6	137#
	2580	20	1RB	On	19.19	19.50	1.074	0.940	1.010	1.6	138#
	2645	20	1RB	On	19.07	19.50	1.104	1.000	1.104	1.6	139#
	2605	20	50%RB	On	19.20	19.50	1.072	0.823	0.882	1.6	140#
	2565	20	50%RB	On	19.14	19.50	1.086	0.821	0.892	1.6	141#
	2580	20	50%RB	On	19.16	19.50	1.081	0.832	0.900	1.6	142#
	2645	20	50%RB	On	19.10	19.50	1.096	0.863	0.946	1.6	143#
	2605	20	100%RB	On	18.56	19.50	1.242	0.820	1.018	1.6	144#
Body-Front (4mm)	2605	20	1RB	Off	22.30	22.50	1.047	0.138	0.145	1.6	178#
	2605	20	50%RB	Off	22.15	22.50	1.084	0.118	0.128	1.6	179#
Body-Back (4mm)	2605	20	1RB	Off	/	/	/	/	/	1.6	/
	2605	20	50%RB	Off	/	/	/	/	/	1.6	/
Body-Left (19mm)	2605	20	1RB	Off	/	/	/	/	/	1.6	/
	2605	20	50%RB	Off	/	/	/	/	/	1.6	/

WLAN 2.4G:

EUT Position	Frequency (MHz)	Test Mode	SENSOR	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	Scaled Factor	Duct Cycle Factor	1g SAR (W/kg)			Plot
								Meas. SAR	Scaled SAR	Limit	
Body-Front (0mm)	2462	802.11b	Off	16.92	17.00	1.019	1.0	0.102	0.104	1.6	149#
Body-Back (0mm)	2462	802.11b	Off	/	/	/	/	/	/	1.6	/
Body-Left (0mm)	2462	802.11b	Off	/	/	/	/	/	/	1.6	/
Body-Right (0mm)	2462	802.11b	Off	16.92	17.00	1.019	1.0	0.408	0.416	1.6	150#
	2412	802.11b	Off	16.75	17.00	1.059	1.0	0.386	0.409	1.6	151#
	2437	802.11b	Off	16.58	17.00	1.102	1.0	0.391	0.431	1.6	152#
Body-Top (0mm)	2462	802.11b	Off	/	/	/	/	/	/	1.6	/
Body-Bottom (0mm)	2462	802.11b	Off	/	/	/	/	/	/	1.6	/

Bluetooth:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	Scaled Factor	Duct Cycle Factor	1g SAR (W/Kg)			Plot
							Meas.	Scaled SAR	Limit	
Body Front(0mm)	2441	DH51Mbps	9.91	10.00	1.021	1.308	0.048	0.064	1.6	145#
Body Back(0mm)	2441	DH51Mbps	/	/	/	/	/	/	1.6	/
Body-Left (0mm)	2441	DH51Mbps	/	/	/	/	/	/	1.6	/
Body-Right(0mm)	2441	DH51Mbps	9.91	10.00	1.021	1.308	0.210	0.280	1.6	146#
	2402	DH51Mbps	8.95	10.00	1.274	1.308	0.158	0.263	1.6	147#
	2480	DH51Mbps	9.29	10.00	1.178	1.308	0.222	0.342	1.6	148#
Body-Top (0mm)	2441	DH51Mbps	/	/	/	/	/	/	1.6	/
Body-Bottom (0mm)	2441	DH51Mbps	/	/	/	/	/	/	1.6	/

Note:

1. When the SAR Value is less than half of the limit, testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. KDB 248227 D01-SAR measurement is not required for 2.4 GHz OFDM(801.11g/n) when the highest reported SAR for DSSS(802.11b) is ≤ 1.2 W/kg, and the output power for DSSS is not less than that for OFDM.

WLAN 5.2G:

EUT Position	Frequency (MHz)	Test Mode	Bandwidth (MHz)	SENSOR	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	Scaled Factor	Duct Cycle Factor	1g SAR (W/kg)			Plot
									Meas. SAR	Scaled SAR	Limit	
Body Front (0mm)	5180	802.11a	20	Off	11.56	12.00	1.107	1.0	0.026	0.028	1.6	153#
Body-Back (0mm)	5180	802.11a	20	Off	/	/	/		/	/	1.6	/
Body-Left (0mm)	5180	802.11a	20	Off	/	/	/		/	/	1.6	/
Body- Right (0mm)	5180	802.11a	20	On	8.68	9.00	1.076	1.0	0.784	0.844	1.6	154#
	5200	802.11a	20	On	8.56	9.00	1.107	1.0	0.822	0.910	1.6	156#
	5240	802.11a	20	On	8.39	9.00	1.151	1.0	0.820	0.944	1.6	157#
Body-Top (0mm)	5180	802.11a	20	Off	/	/	/		/	/	1.6	/
Body-Bottom (0mm)	5180	802.11a	20	Off	/	/	/		/	/	1.6	/
Body-Right (4mm)	5180	802.11a	20	Off	/	/	/		/	/	1.6	/

WLAN 5.8G:

EUT Position	Frequency (MHz)	Test Mode	Bandwidth (MHz)	SENSOR	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	Scaled Factor	Duct Cycle Facto	1g SAR (W/kg)			Plot
									Meas. SAR	Scaled SAR	Limit	
Body Front (0mm)	5825	802.11a	20	Off	13.30	13.50	1.047	1.0	0.039	0.041	1.6	158#
Body-Back (0mm)	5825	802.11a	20	Off	/	/	/	/	/	/	1.6	/
Body-Left (0mm)	5825	802.11a	20	Off	/	/	/	/	/	/	1.6	/
Body-Right (0mm)	5825	802.11a	20	On	7.41	7.50	1.021	1.0	0.863	0.881	1.6	159#
	5745	802.11a	20	On	7.26	7.50	1.057	1.0	0.943	0.997	1.6	160#
	5785	802.11a	20	On	7.18	7.50	1.076	1.0	0.939	1.011	1.6	161#
Body-Top (0mm)	5825	802.11a	20	Off	/	/	/	/	/	/	1.6	/
Body-Bottom (0mm)	5825	802.11a	20	Off	/	/	/	/	/	/	1.6	/
Body-Right (4mm)	5825	802.11a	20	Off	/	/	/	/	/	/	1.6	/

Note:

1. When the SAR Value is less than half of the limit, testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
4. According to IEEE 1528:2013, If the correction Δ SAR is within $\pm 5\%$, the measured SAR results should not be corrected.

SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

Simultaneous Transmission:

Description of Simultaneous Transmit Capabilities		
Transmitter Combination	Simultaneous?	Hotspot?
WWAN + WLAN 2.4G	√	√
WWAN+ WLAN 5G	√	√
WWAN+ Bluetooth	√	×
WWAN + WLAN 2.4G/5G+NFC	√	×
WWAN + Bluetooth +NFC	√	×

Simultaneous Transmission Consideration Detail

Transmitter Combination	Position	Max SAR(W/kg)		ΣSAR< 1.6W/kg
		SAR1(WWAN)	SAR2(WLAN)	
WWAN + WLAN 2.4G	Body Front	0.520	0.104	0.624
	Body Back	0.345	0.061	0.406
	Body Left	1.112	0.011	1.123
	Body Right	0.184	0.431	0.615
	Body Top	0.065	0.011	0.076
	Body Bottom	0.263	0.050	0.313

Transmitter Combination	Position	Max SAR(W/kg)		ΣSAR< 1.6W/kg
		SAR1(WWAN)	SAR2(Bluetooth)	
WWAN+ Bluetooth	Body Front	0.520	0.064	0.584
	Body Back	0.345	0.016	0.361
	Body Left	1.112	0.018	1.13
	Body Right	0.184	0.342	0.526
	Body Top	0.065	0.009	0.074
	Body Bottom	0.263	0.020	0.283

Transmitter Combination	Position	Max SAR(W/kg)		ΣSAR< 1.6W/kg
		SAR1(WWAN)	SAR2(WLAN)	
WWAN+ WLAN 5G	Body Front	0.520	0.041	0.561
	Body Back	0.345	0.053	0.398
	Body Left	1.112	0.004	1.116
	Body Right	0.184	1.011	1.195
	Body Top	0.065	0.004	0.069
	Body Bottom	0.263	0.007	0.27

Note:

1.Some of the data came from the original report RKSA210422002-20B

2.For the EIRP of NFC is 0.01mW, per KDB447498 D01 clause 4.3, the estimated SAR is so lower, so the NFC almost have no influence on the results of simultaneous transmission.

Conclusion:

Sum of SAR: **ΣSAR ≤ 1.6 W/kg** for 1g Body SAR , therefore simultaneous transmission SAR with Volume Scans is **not required**.

APPENDIX A SAR PLOTS OF SAR MEASUREMENT

Please Refer to the Attachment.

APPENDIX B MEASUREMENT UNCERTAINTY


The uncertainty budget has been determined for the measurement system and is given in the following Table.

DASY6 Uncertainty Budget According to IEEE 1528:2013 (30M - 3GHz range)								
Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)	(Vi) Veff
Measurement System								
Probe Calibration	6.35	N	1	1	1	6.35	6.35	∞
Axial Isotropy	4.7	R	1.732	1	1	2.7	2.7	∞
Hemispherical Isotropy	9.6	R	1.732	1	1	5.5	5.5	∞
Boundary Effects	2.0	R	1.732	1	1	1.2	1.2	∞
Linearity	4.7	R	1.732	1	1	2.7	2.7	∞
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6	∞
Modulation Response	2.4	R	1.732	1	1	1.4	1.4	∞
Readout Electronics	0.3	N	1	1	1	0.3	0.3	∞
Response Time	0.8	R	1.732	1	1	0.5	0.5	∞
Integration Time	2.6	R	1.732	1	1	1.5	1.5	∞
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7	∞
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7	∞
Probe Positioner	0.8	R	1.732	1	1	0.5	0.5	∞
Probe Positioning	6.7	R	1.732	1	1	3.9	3.9	∞
Post-Processing	4.0	R	1.732	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	N	1	1	1	2.9	2.9	145
Device Holder	3.6	N	1	1	1	3.6	3.6	5
Power Drift	5.0	R	1.732	1	1	2.9	2.9	∞
Power Scaling	0.0	R	1.732	1	1	0.0	0.0	∞
Phantom and Setup								
Phantom Uncertainty	7.9	R	1.732	1	1	4.6	4.6	∞
SAR correction	1.9	N	1.732	1	0.84	1.1	0.9	∞
Liquid Conductivity (mea.)	2.5	N	1.732	0.78	0.21	1.1	0.3	∞
Liquid Permittivity (mea.)	2.5	N	1.732	0.23	0.26	0.3	0.4	∞
Liquid Conductivity -Temp.unc	3.4	R	1.732	0.78	0.71	1.5	1.4	∞
Liquid Permittivity -Temp.unc	0.4	R	1.732	0.23	0.26	0.1	0.1	∞
Combined Std. Uncertainty						13.18%	13.11%	1859
Coverage Factor for 95 %						K=2	K=2	
Expanded STD Uncertainty						26.36%	26.22%	

DASY6 Uncertainty Budget According to IEEE 1528:2013 (3 - 6 GHz range)								
Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)	(Vi) Veff
Measurement System								
Probe Calibration	6.95	N	1	1	1	6.95	6.95	∞
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9	∞
Boundary Effects	2.0	R	1.732	1	1	1.2	1.2	∞
Linearity	4.7	R	1.732	1	1	2.7	2.7	∞
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6	∞
Modulation Response	2.4	R	1.732	1	1	1.4	1.4	∞
Readout Electronics	0.3	N	1	1	1	0.3	0.3	∞
Response Time	0.8	R	1.732	1	1	0.5	0.5	∞
Integration Time	2.6	R	1.732	1	1	1.5	1.5	∞
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7	∞
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7	∞
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2	∞
Probe Positioning	6.7	R	1.732	1	1	3.9	3.9	∞
Max.SAREval	4.0	R	1.732	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	N	1.732	1	1	1.7	1.7	145
Device Holder	3.6	N	1.732	1	1	2.1	2.1	5
Power Drift	5.0	R	1.732	1	1	2.9	2.9	∞
Power Scaling	0.0	R	1.732	1	1	0.0	0.0	∞
Phantom and Setup								
Phantom Uncertainty	6.6	R	1.732	1	1	3.8	3.8	∞
SAR correction	1.9	N	1.732	1	0.84	1.1	0.9	∞
Liquid Conductivity (mea.)	2.5	N	1.732	0.78	0.71	1.1	1.0	∞
Liquid Permittivity (mea.)	2.5	N	1.732	0.26	0.26	0.4	0.4	∞
Liquid Conductivity -Temp.unc	3.4	R	1.732	0.78	0.71	1.5	1.4	∞
Liquid Permittivity -Temp.unc	0.4	R	1.732	0.23	0.26	0.1	0.1	∞
Combined Std. Uncertainty						11.92%	11.88%	9023
Coverage Factor for 95 %						K=2	K=2	
Expanded STD Uncertainty						23.84%	23.76%	

APPENDIX C EUT TEST POSITION PHOTOS

WWAN/WLAN - Body Front(0mm)

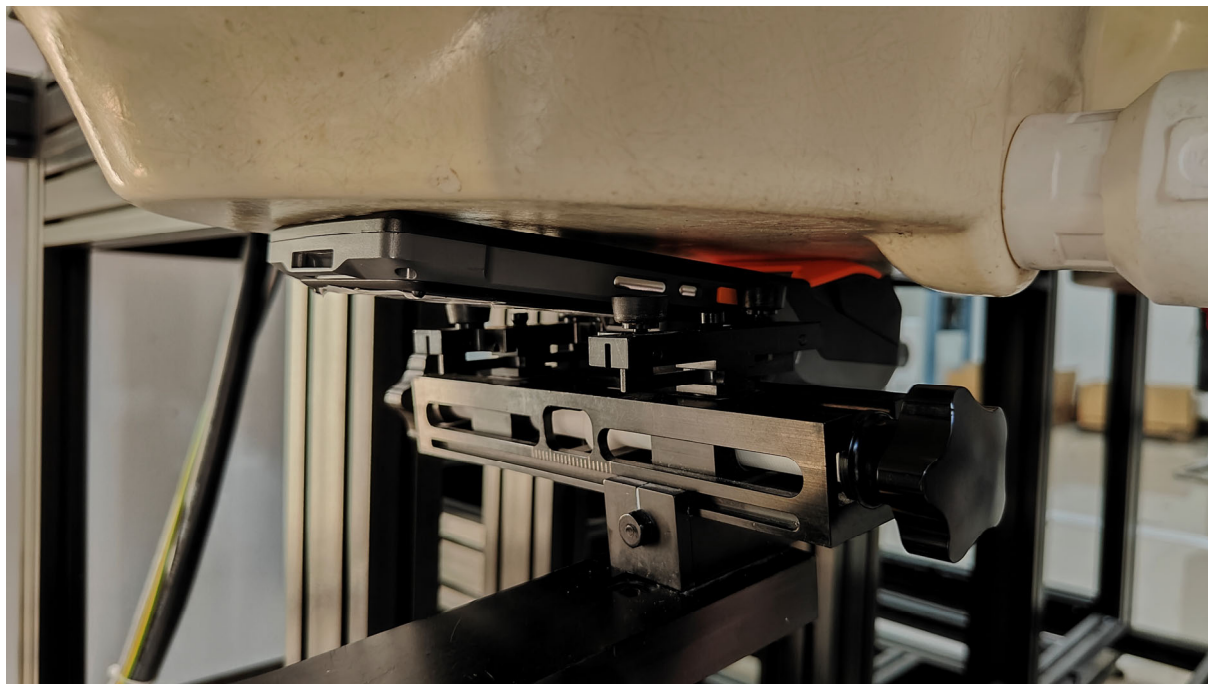


WWAN - Body Back(0mm)




WWAN/WLAN - Body Left(0mm)




WWAN - Body Right(0mm)

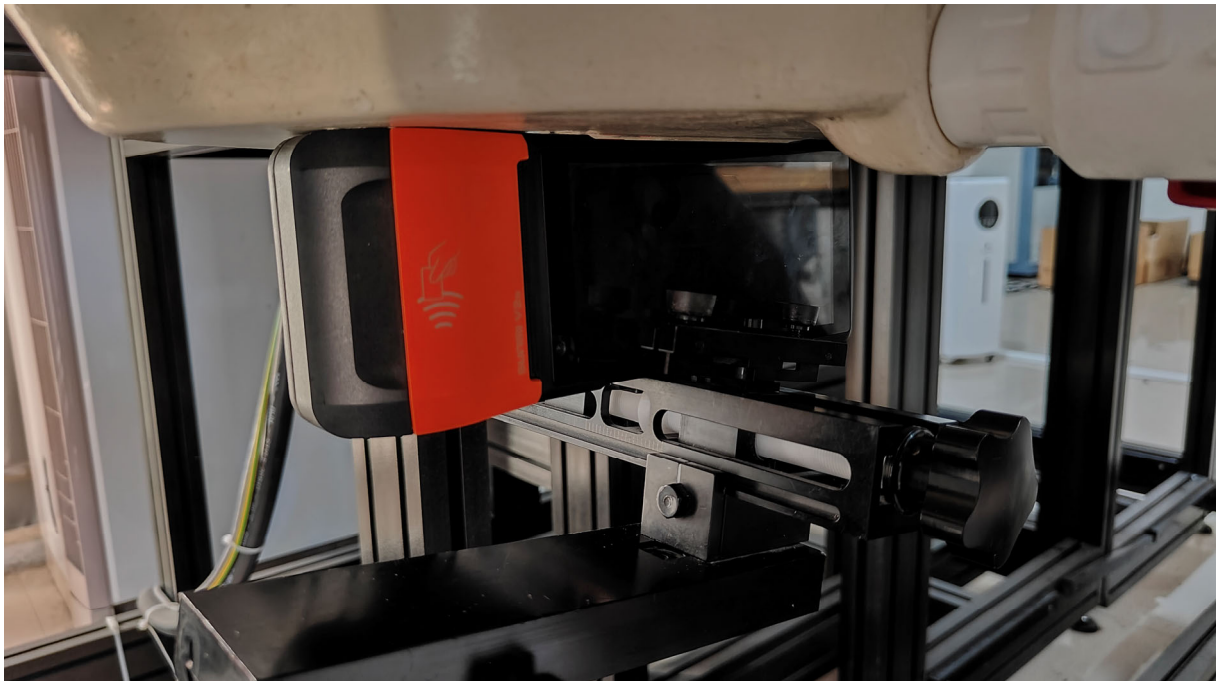


WWAN - Body Top(0mm)

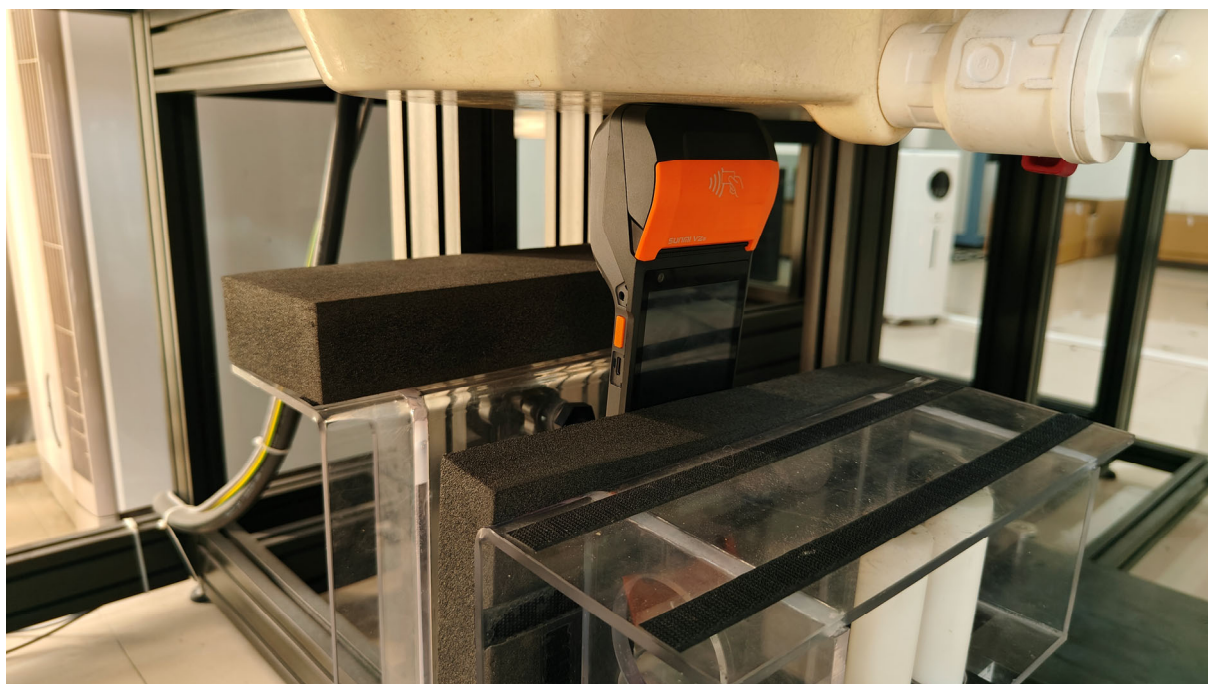

WWAN - Body Bottom(0mm)

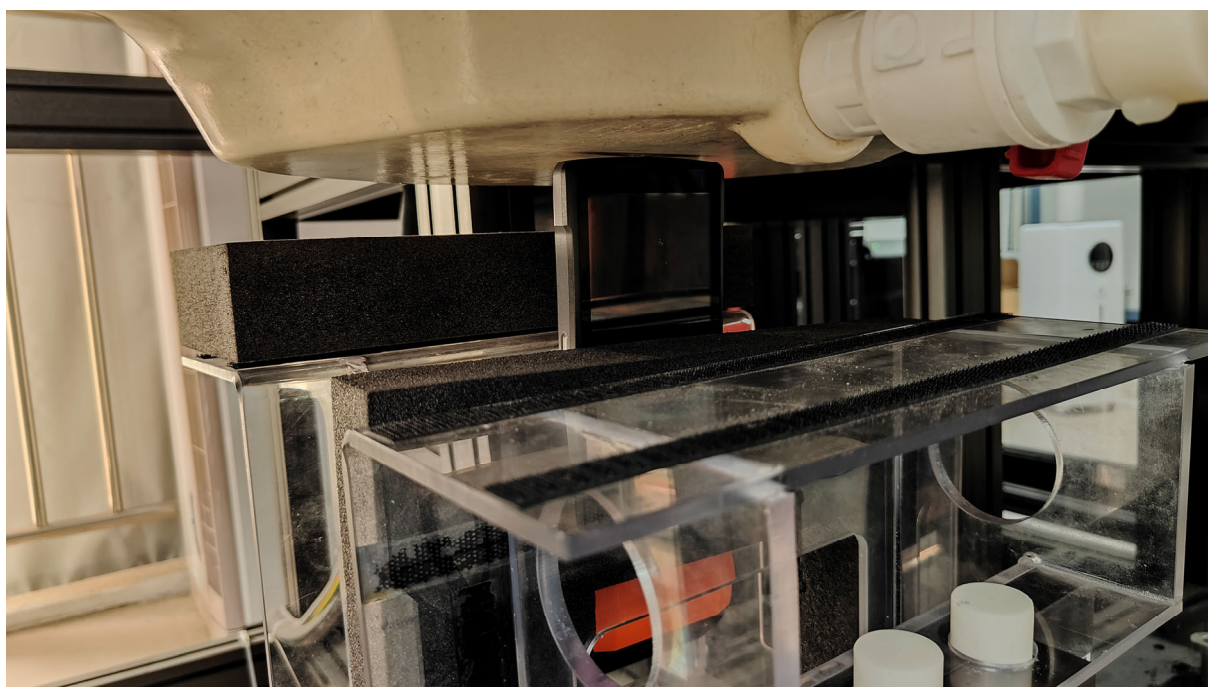


WWAN - Body Front(4mm)

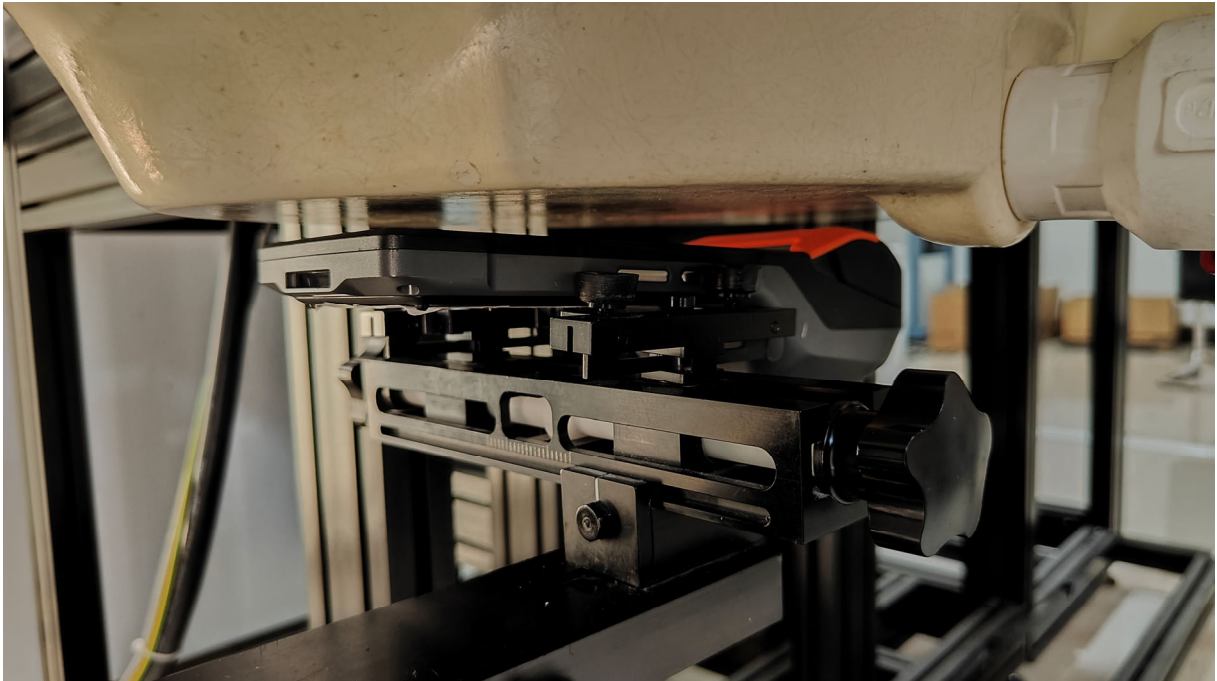

WWAN - Body Back(4mm)



WWAN - Body Left(19mm)

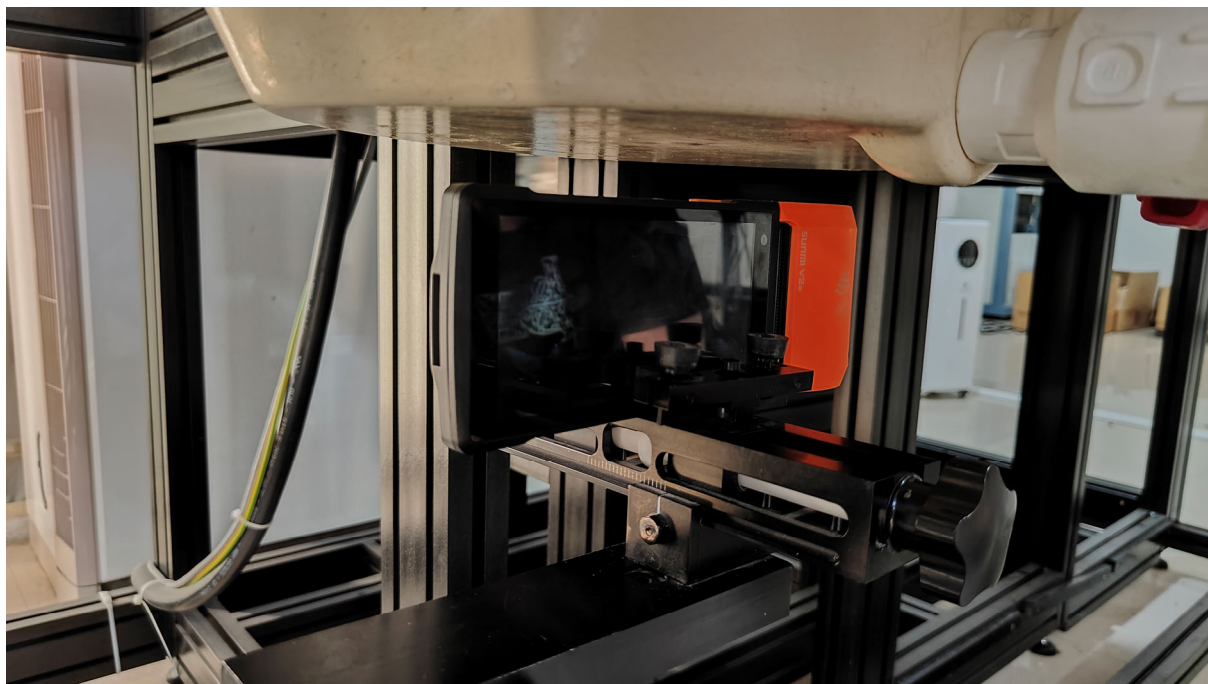

APPENDIX D CALIBRATION CERTIFICATES

Please Refer to the Attachment.

Declarations

1. The laboratory is not responsible for the authenticity of any information provided by the applicant. Information from the applicant that may affect test results is marked with “★”.
2. The test data was only valid for the test sample(s).
3. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
4. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
5. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor $k=2$ with the 95.45% confidence interval.

******* END OF REPORT *******