




30 MHz – 1 GHz (15 MHz, 16-QAM, Middle Channel)

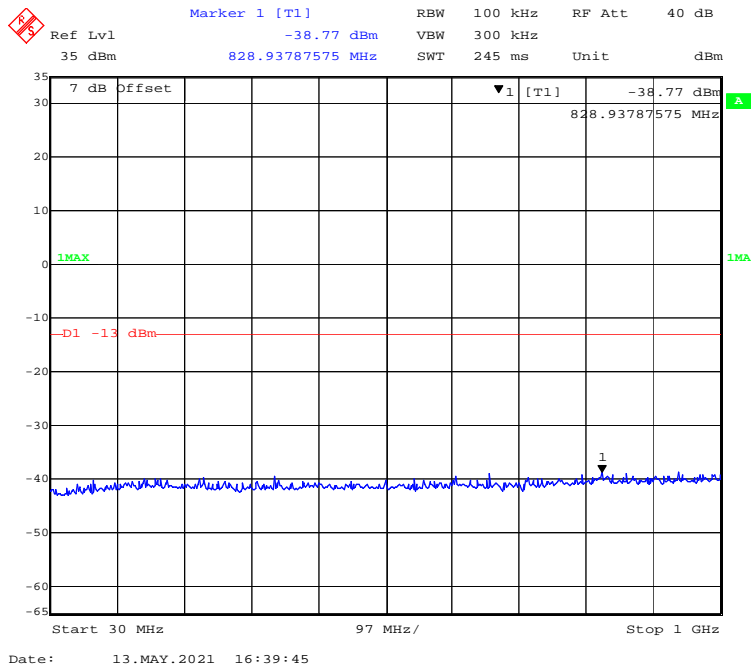


1 GHz – 20 GHz (15 MHz, 16-QAM, Middle Channel)

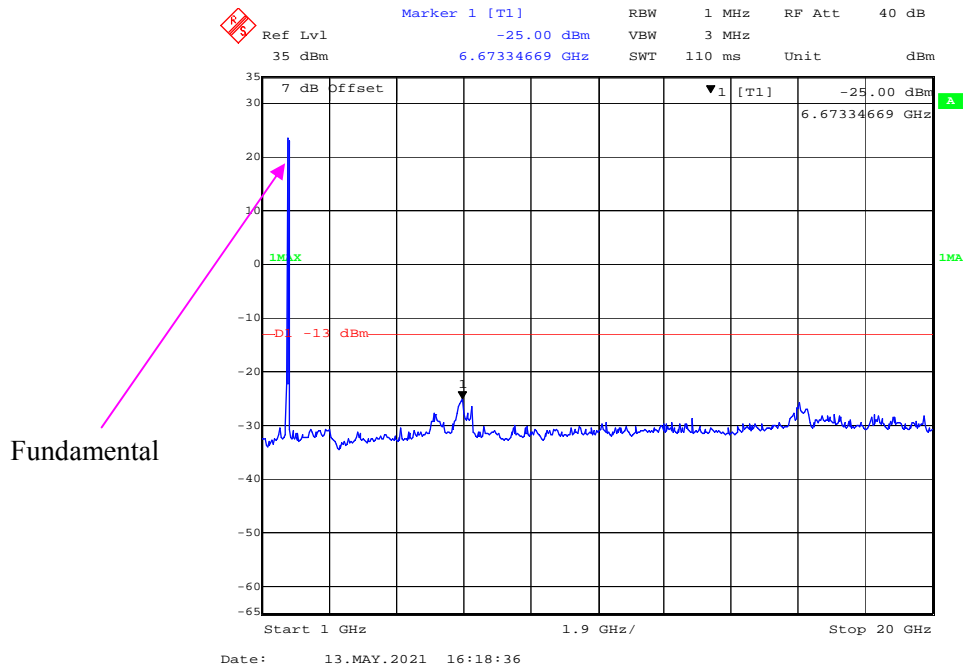


30 MHz – 1 GHz (20 MHz, QPSK, Middle Channel)

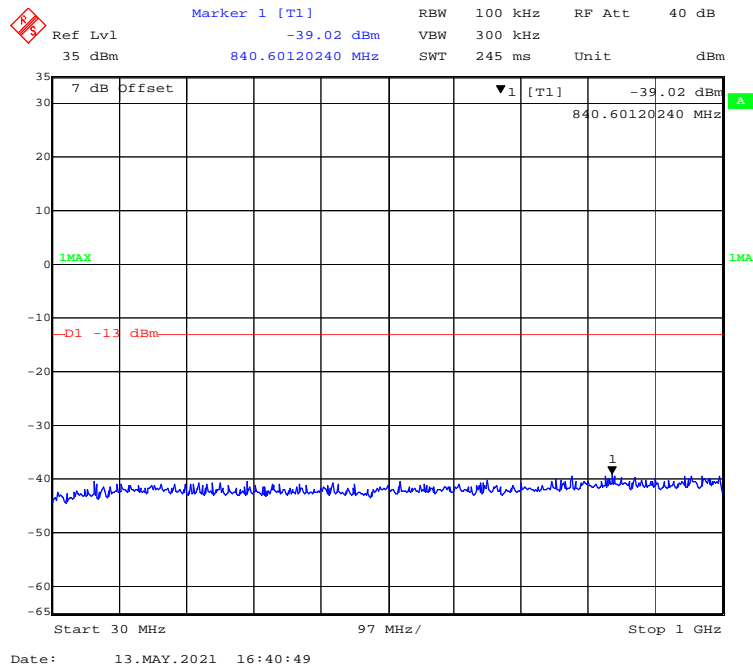


1 GHz – 20 GHz (20 MHz, QPSK, Middle Channel)

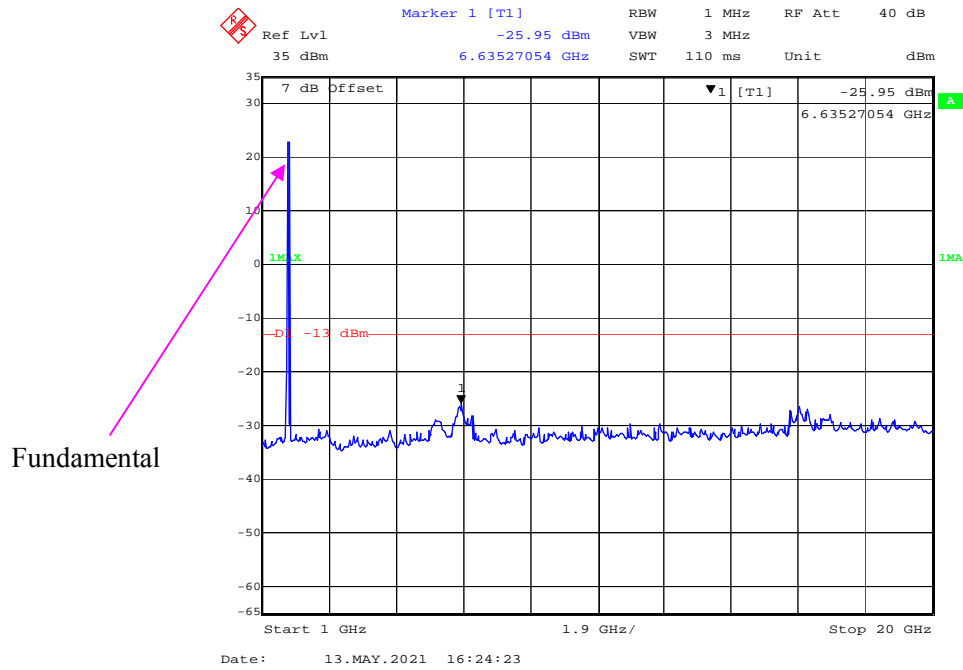


30 MHz – 1 GHz (20 MHz, 16-QAM, Middle Channel)

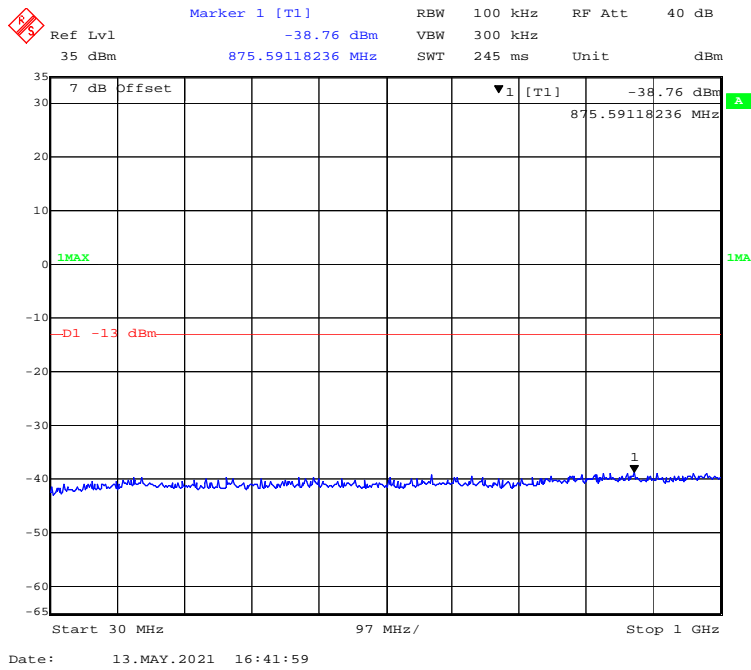


1 GHz – 20 GHz (20 MHz, 16-QAM, Middle Channel)

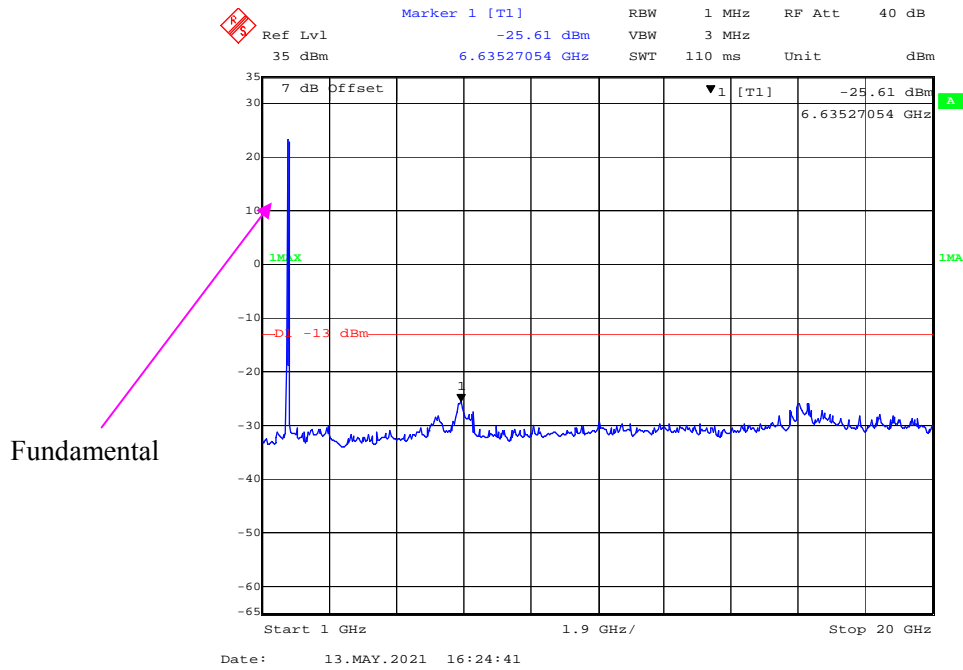


30 MHz – 1 GHz (1.4 MHz, QPSK, High Channel)

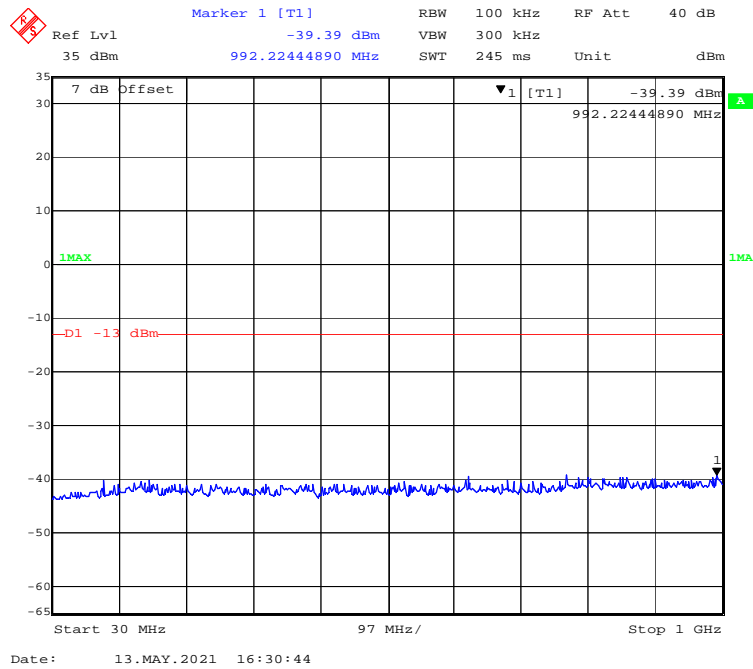


1 GHz – 20 GHz (1.4 MHz, QPSK, High Channel)

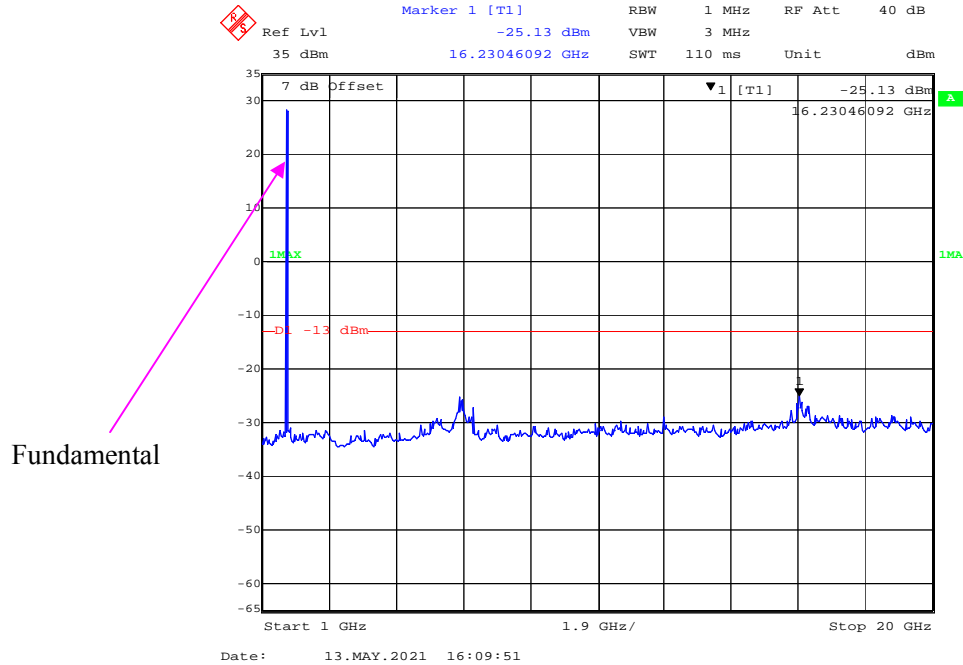


30 MHz – 1 GHz (1.4 MHz, 16-QAM, High Channel)

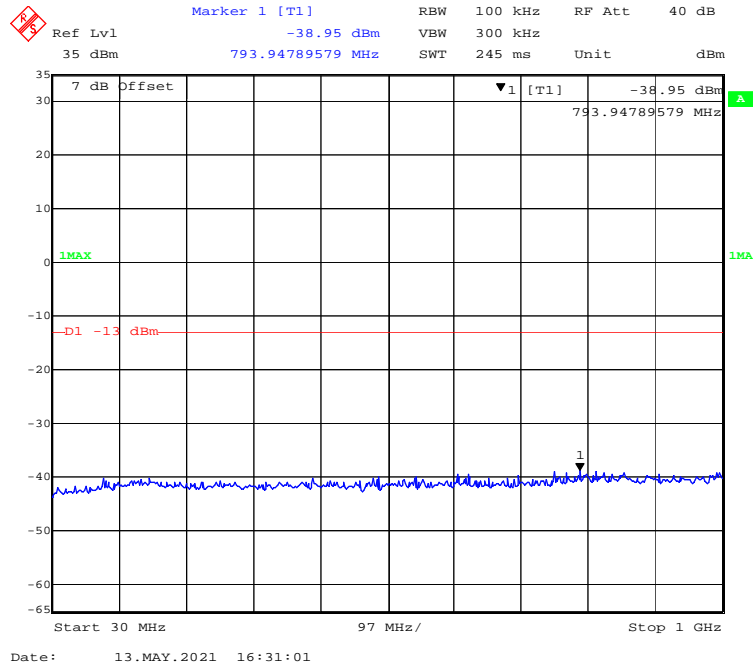


1 GHz – 20 GHz (1.4 MHz, 16-QAM, High Channel)

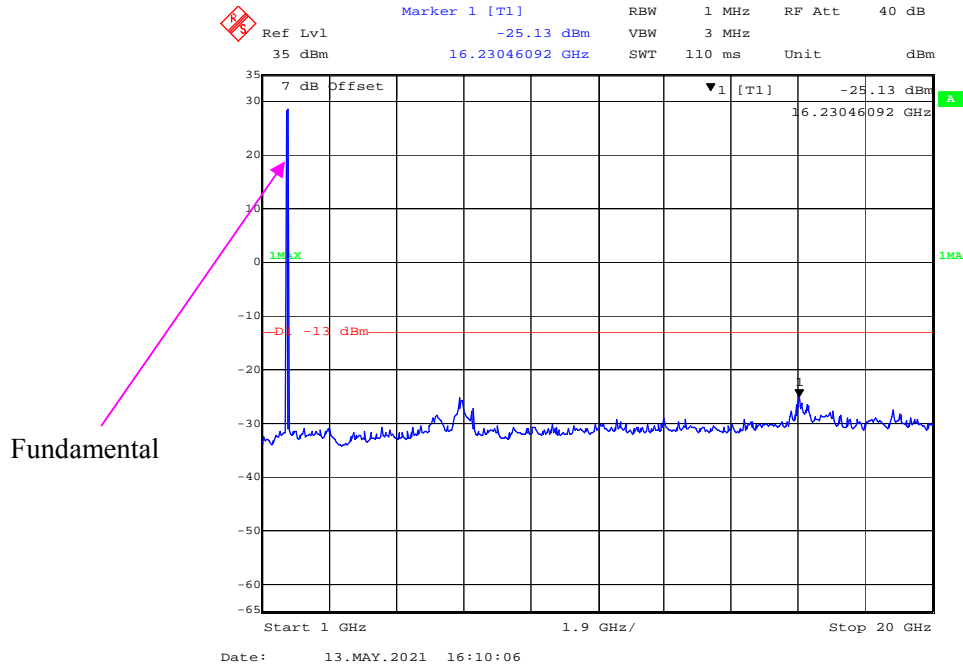


30 MHz – 1 GHz (3 MHz, QPSK, High Channel)

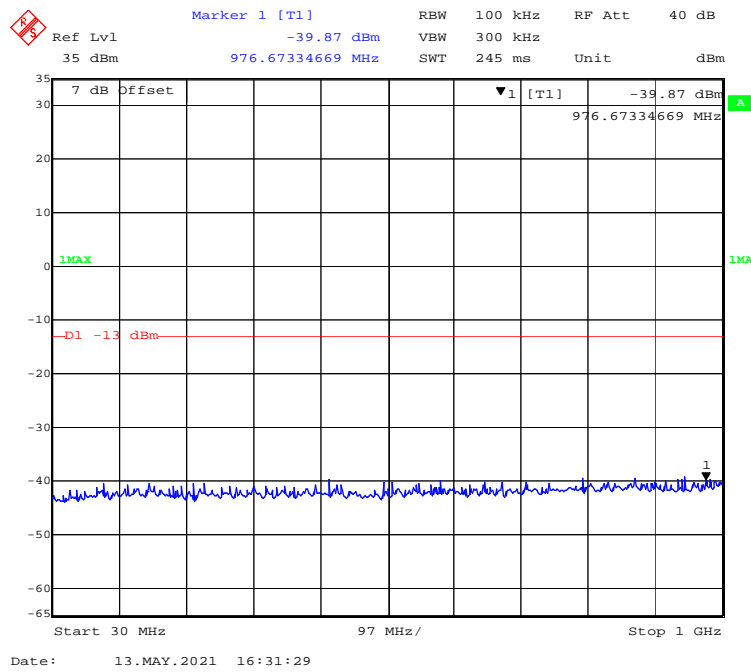


1 GHz – 20 GHz (3 MHz, QPSK, High Channel)

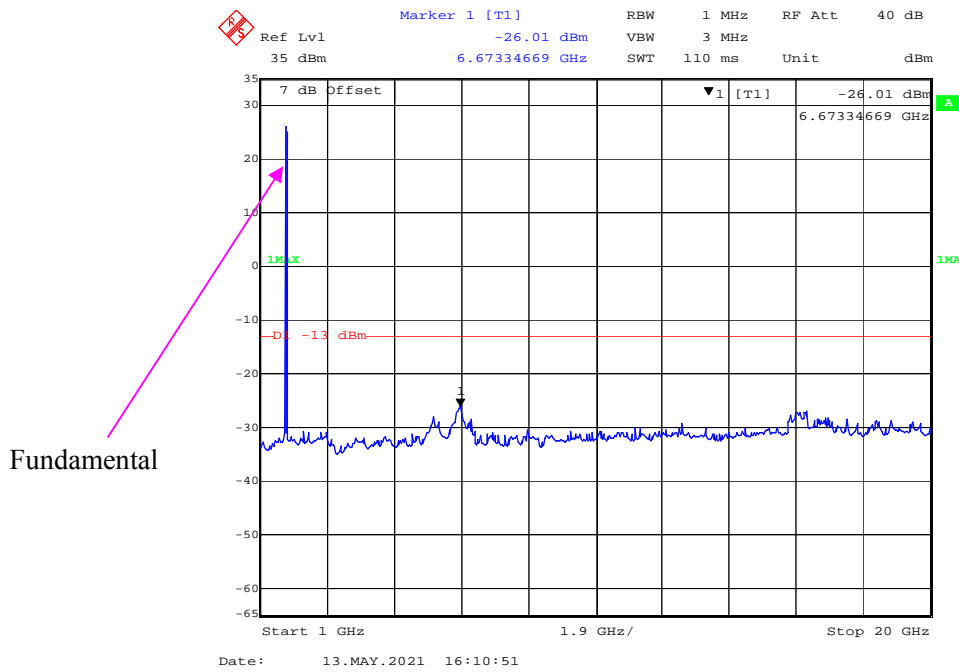


30 MHz – 1 GHz (3 MHz, 16-QAM, High Channel)

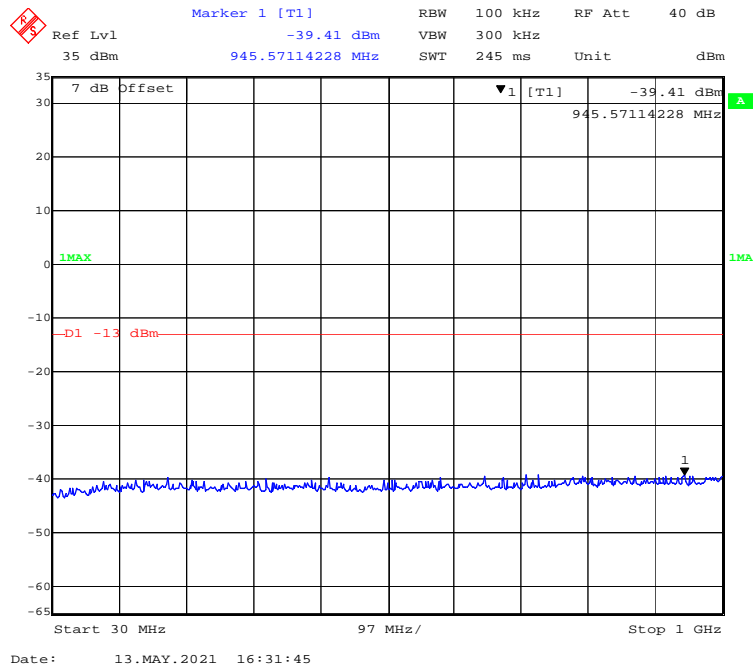


1 GHz – 20 GHz (3 MHz, 16-QAM, High Channel)

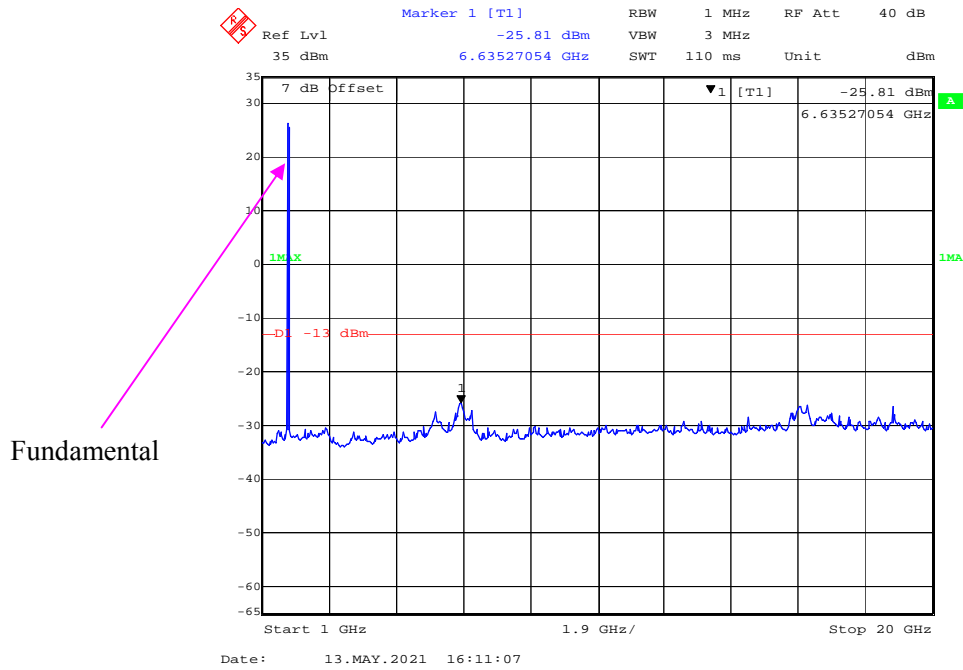


30 MHz – 1 GHz (5 MHz, QPSK, High Channel)

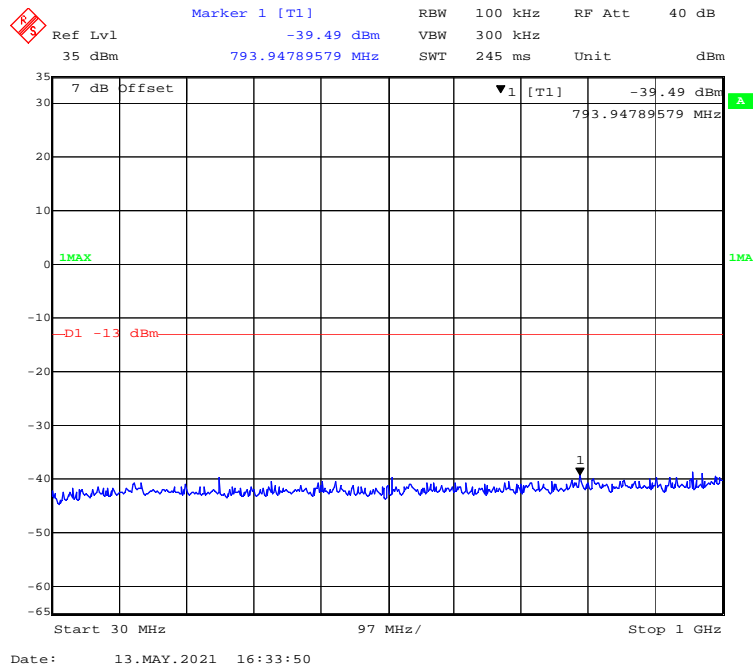


1 GHz – 20 GHz (5 MHz, QPSK, High Channel)

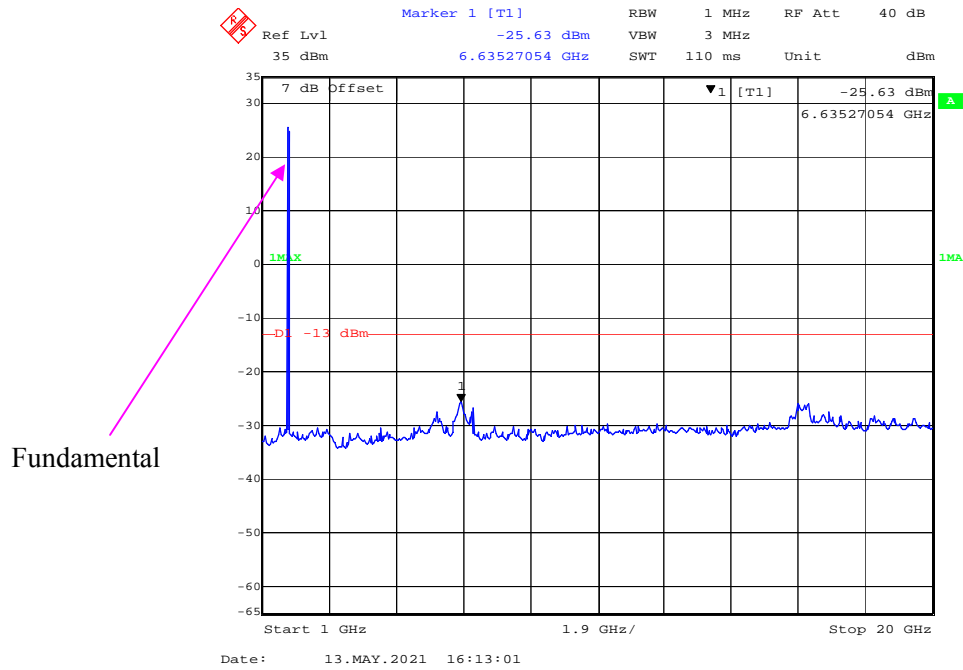


30 MHz – 1 GHz (5 MHz, 16-QAM, High Channel)

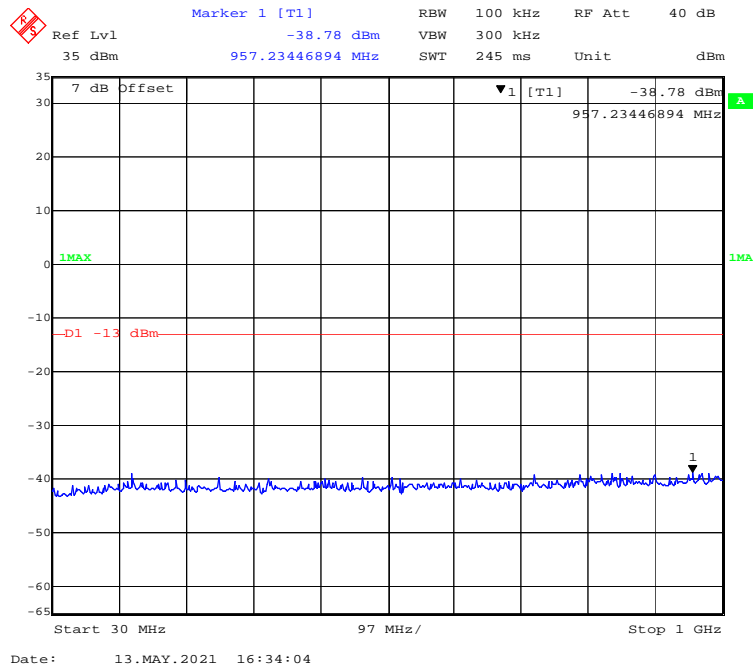


1 GHz – 20 GHz (5 MHz, 16-QAM, High Channel)

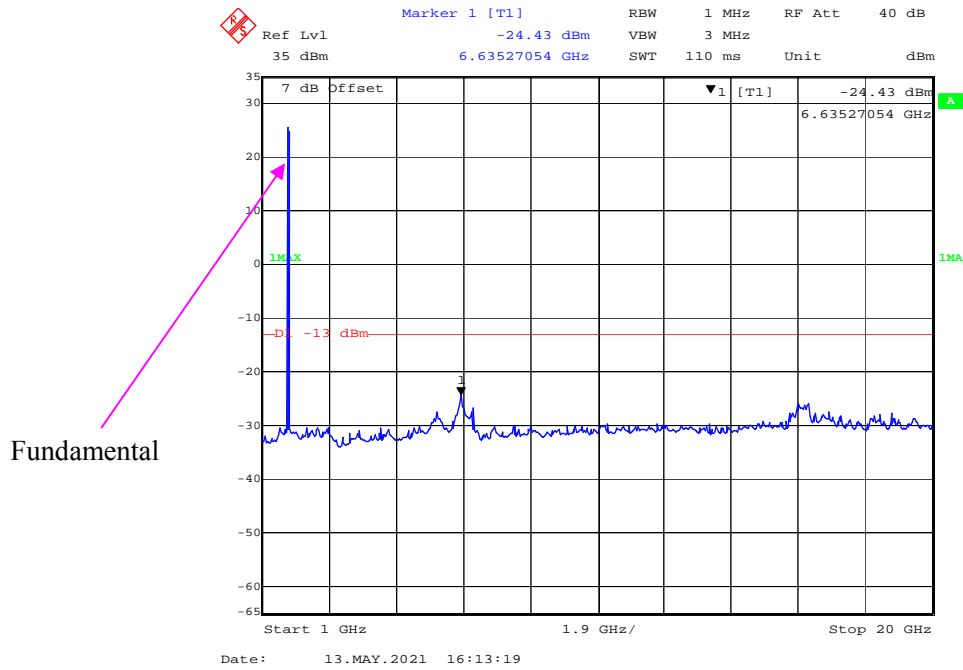


30 MHz – 1 GHz (10 MHz, QPSK, High Channel)

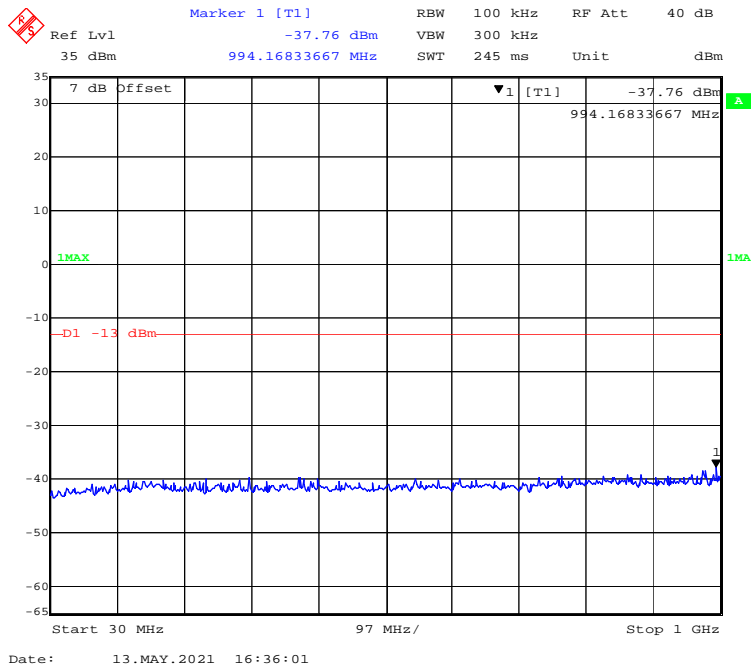


1 GHz – 20 GHz (10 MHz, QPSK, High Channel)

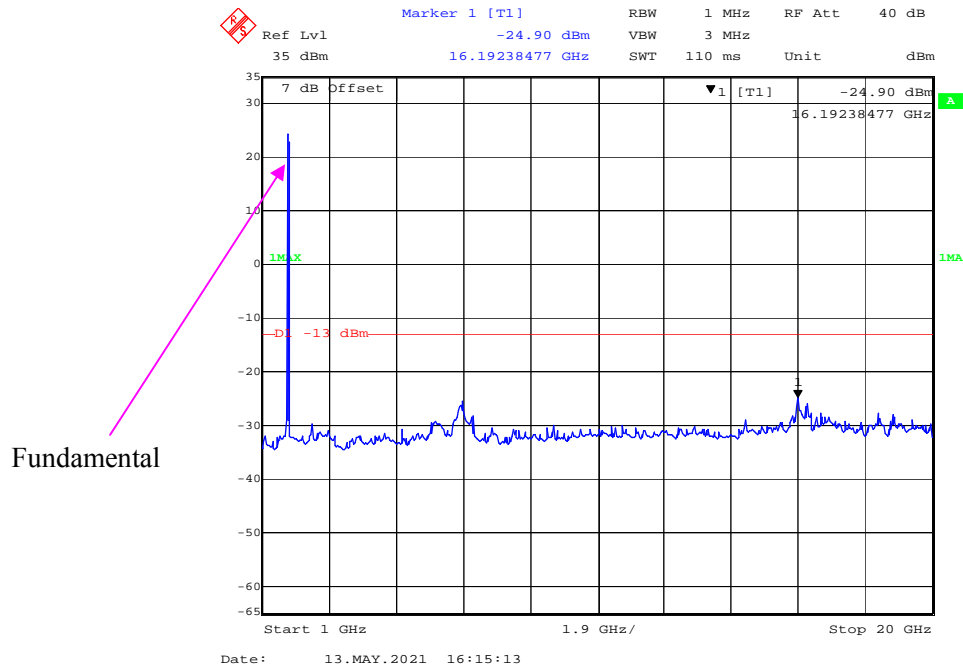


30 MHz – 1 GHz (10 MHz, 16-QAM, High Channel)

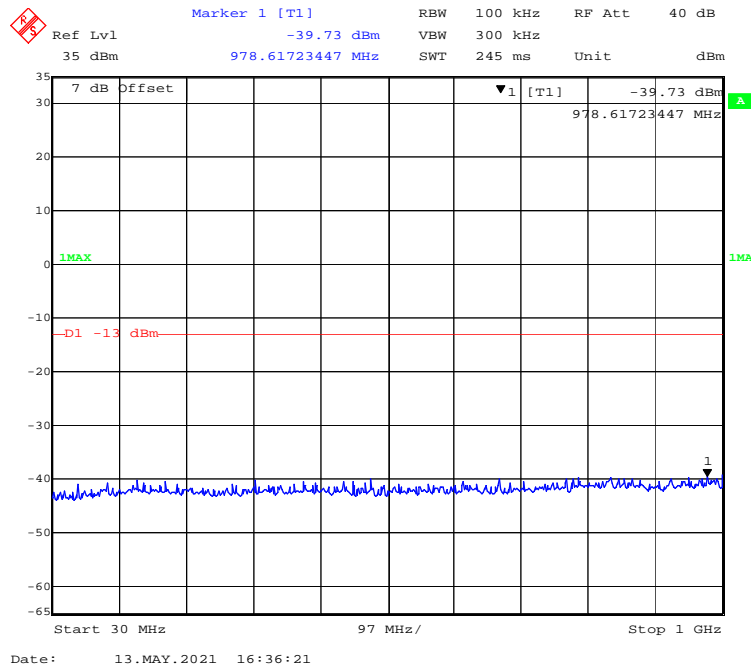


1 GHz – 20 GHz (10 MHz, 16-QAM, High Channel)

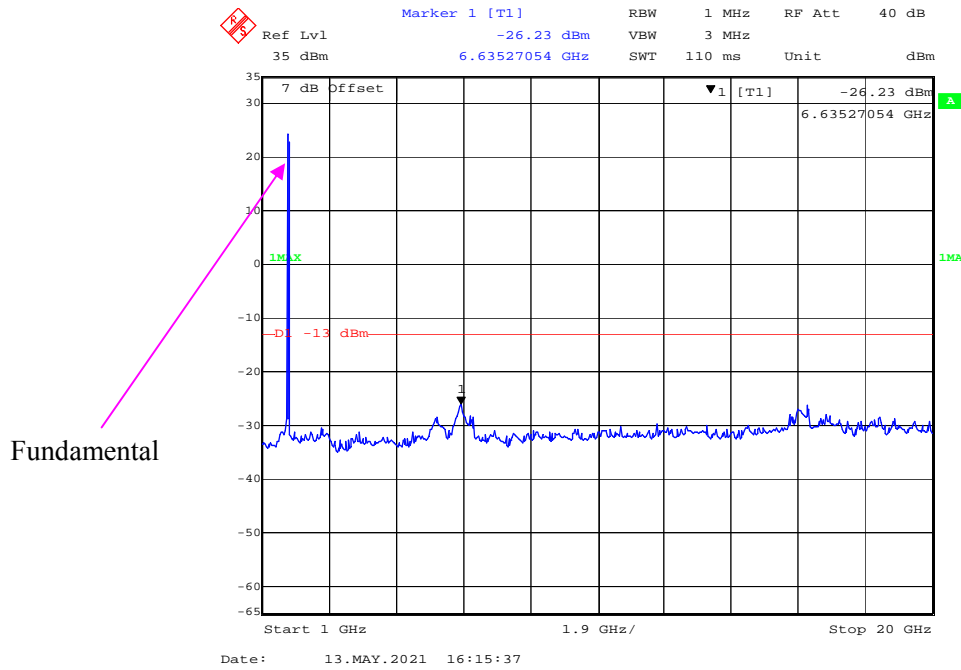


30 MHz – 1 GHz (15 MHz, QPSK, High Channel)

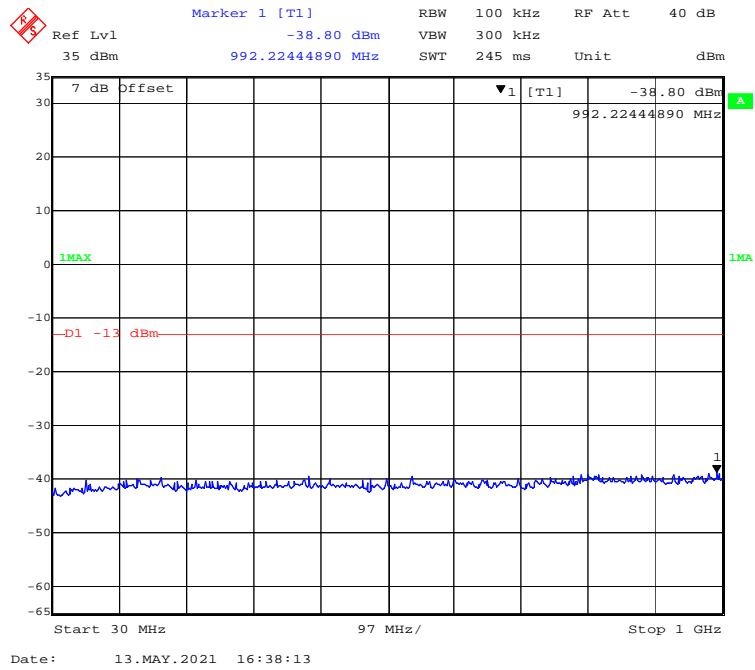


1 GHz – 20 GHz (15 MHz, QPSK, High Channel)

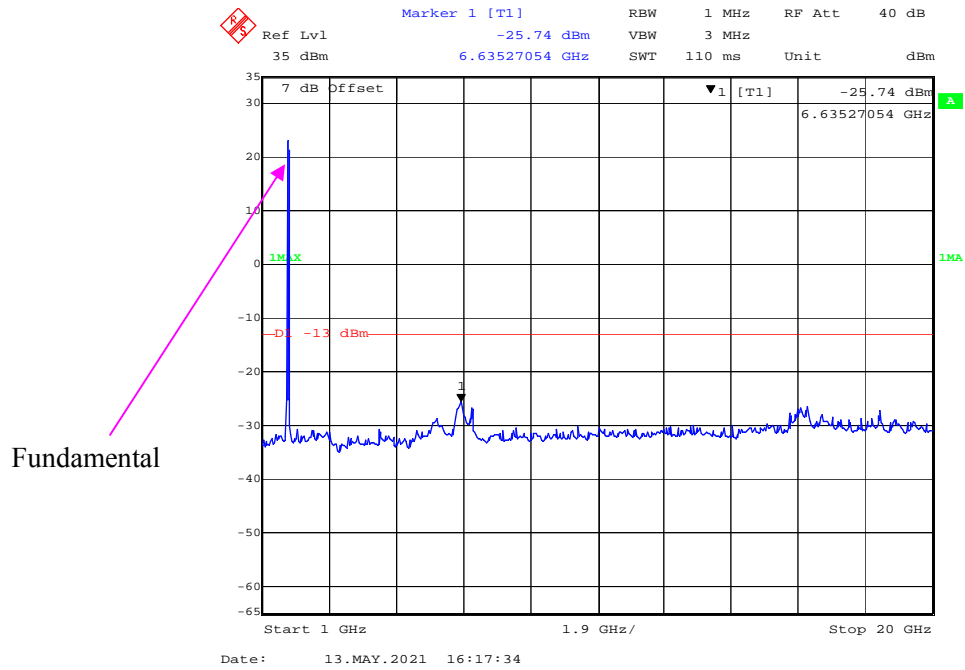


30 MHz – 1 GHz (15 MHz, 16-QAM, High Channel)

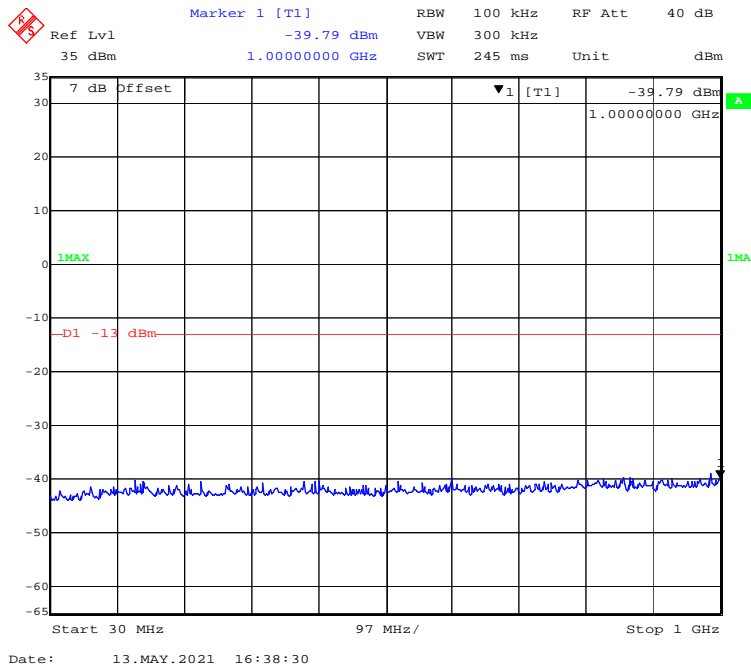


1 GHz – 20 GHz (15 MHz, 16-QAM, High Channel)

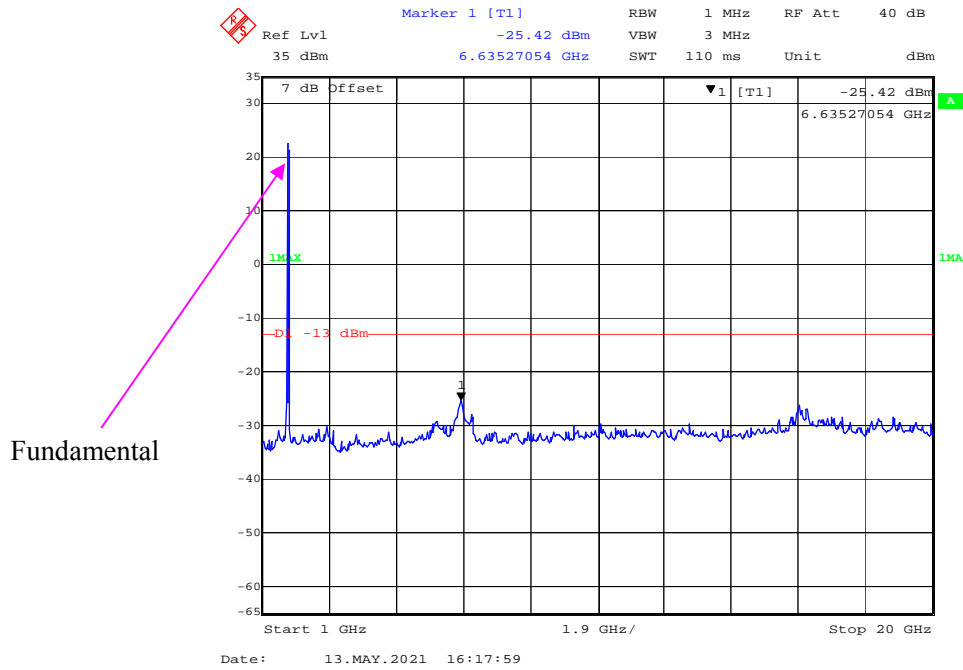


30 MHz – 1 GHz (20 MHz, QPSK, High Channel)

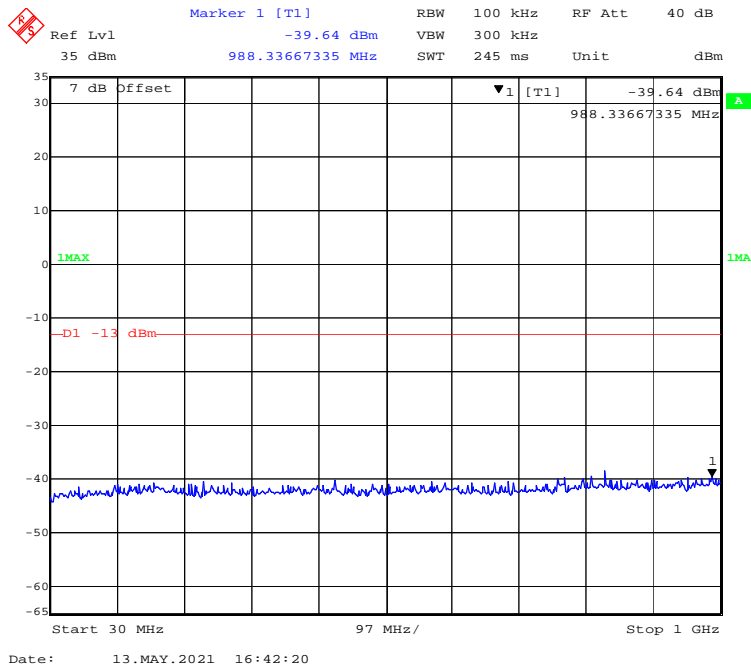


1 GHz – 20 GHz (20 MHz, QPSK, High Channel)

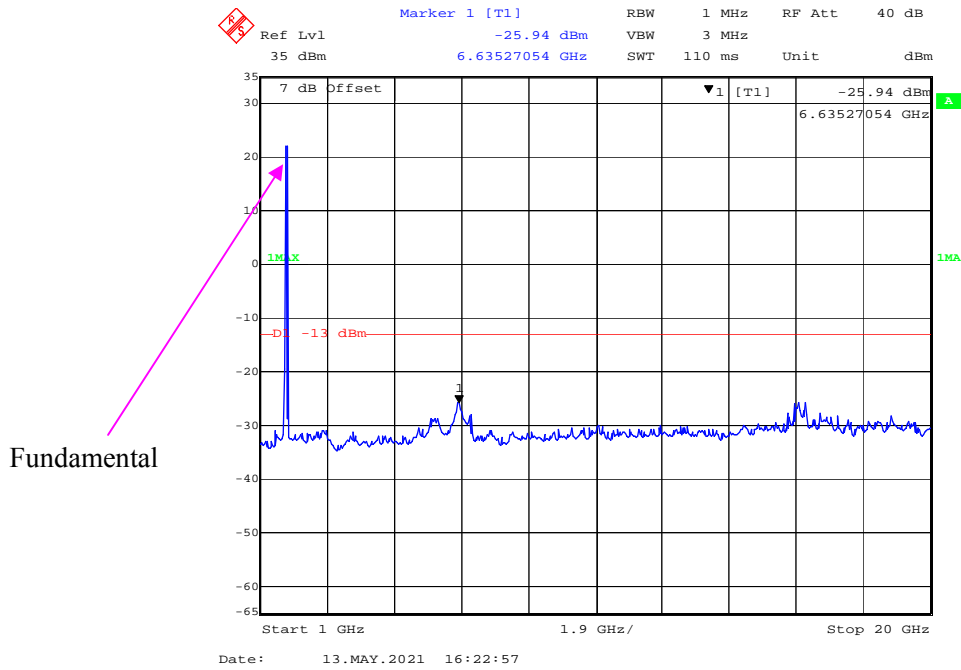

30 MHz – 1 GHz (20 MHz, 16-QAM, High Channel)

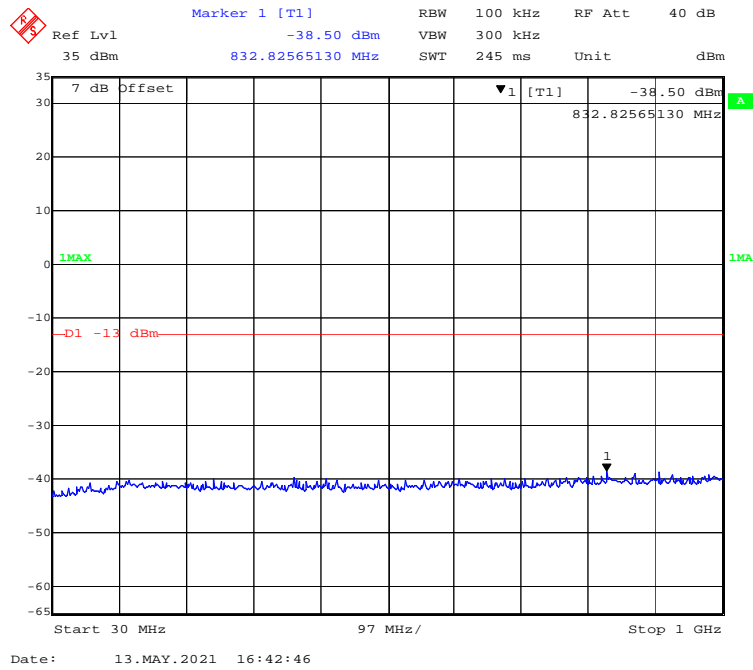

1 GHz – 20 GHz (20 MHz, 16-QAM, High Channel)

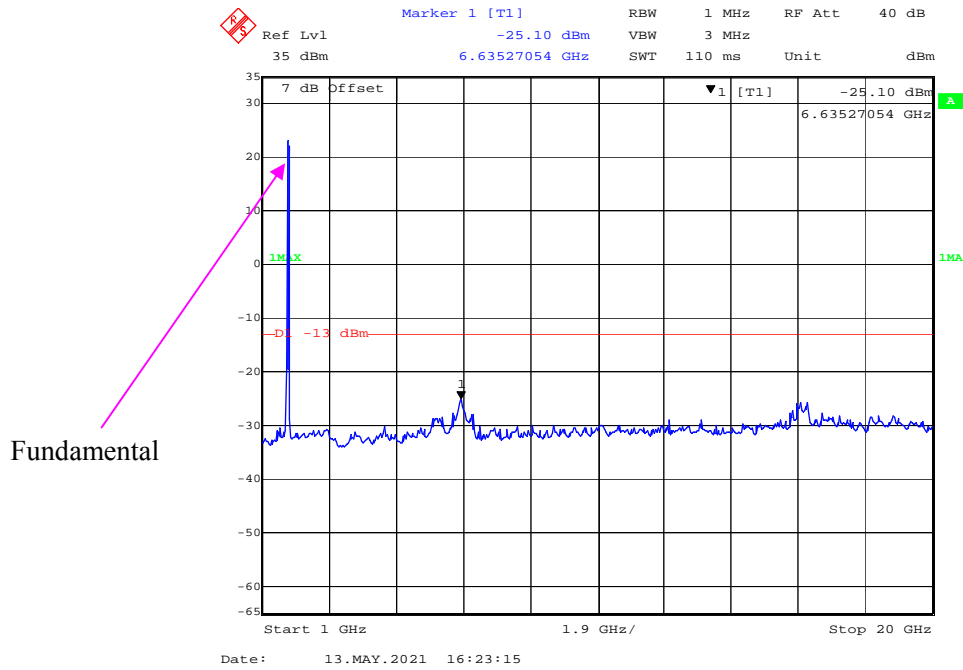

FCC § 2.1053; § 22.917 (a); § 24.238 (a)& §27.53 (a) (g) (h) (m); § 90.691 - SPURIOUS RADIATED EMISSIONS

Applicable Standards

FCC § 2.1053, §22.917(a) and § 24.238(a), §90.691 and § 27.53(h) (m)

22.917 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

27.53(h) (m), for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Rule Part 90.691 specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TX pwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \text{Log}_{10} (\text{power out in Watts})$

Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 24.9 °C |
| Relative Humidity: | 50 % |
| ATM Pressure: | 101.9 kPa |

The testing was performed by Miller Xie on 2021-05-18.

Test mode: Transmitting (Pre-scan with low, middle and high channels, and the worse case data as below)

30 MHz ~ 10 GHz:

GSM 850 Band

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|---------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| GPRS Mode, Low channel | | | | | | | | | | |
| 306.23 | 53.24 | 197 | 150 | H | -52.56 | 0.46 | -2.1 | -55.12 | -13 | 42.12 |
| 306.23 | 55.51 | 24 | 150 | V | -50.29 | 0.46 | -2.1 | -52.85 | -13 | 39.85 |
| 1648.4 | 75.34 | 289 | 150 | H | -38.01 | 0.84 | 8.44 | -30.41 | -13 | 17.41 |
| 1648.4 | 74.48 | 130 | 150 | V | -38.87 | 0.84 | 8.44 | -31.27 | -13 | 18.27 |
| GPRS Mode, Middle channel | | | | | | | | | | |
| 306.21 | 56.3 | 68 | 150 | H | -49.5 | 0.46 | -2.1 | -52.06 | -13 | 39.06 |
| 306.21 | 54.98 | 200 | 150 | V | -50.82 | 0.46 | -2.1 | -53.38 | -13 | 40.38 |
| 1673.2 | 75.01 | 193 | 150 | H | -38.38 | 0.84 | 8.48 | -30.74 | -13 | 17.74 |
| 1673.2 | 73.36 | 30 | 150 | V | -40.03 | 0.84 | 8.48 | -32.39 | -13 | 19.39 |
| GPRS Mode, High channel | | | | | | | | | | |
| 306.28 | 55.4 | 36 | 150 | H | -50.4 | 0.46 | -2.1 | -52.96 | -13 | 39.96 |
| 306.28 | 54.89 | 35 | 150 | V | -50.91 | 0.46 | -2.1 | -53.47 | -13 | 40.47 |
| 1697.6 | 75.17 | 124 | 150 | H | -37.84 | 0.84 | 8.52 | -30.16 | -13 | 17.16 |
| 1697.6 | 74.1 | 232 | 150 | V | -38.91 | 0.84 | 8.52 | -31.23 | -13 | 18.23 |

WCDMA Band V

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|----------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| WCDMA Mode, Low channel | | | | | | | | | | |
| 226.79 | 49.65 | 186 | 150 | H | -57.91 | 0.43 | -3.04 | -61.38 | -13 | 48.38 |
| 226.79 | 52.24 | 279 | 150 | V | -55.32 | 0.43 | -3.04 | -58.79 | -13 | 45.79 |
| 1652.80 | 62.56 | 11 | 100 | H | -50.76 | 0.84 | 8.44 | -43.16 | -13 | 30.16 |
| 1652.80 | 59.9 | 243 | 100 | V | -53.42 | 0.84 | 8.44 | -45.82 | -13 | 32.82 |
| WCDMA Mode, Middle channel | | | | | | | | | | |
| 226.79 | 48.83 | 282 | 150 | H | -58.73 | 0.43 | -3.04 | -62.2 | -13 | 49.2 |
| 226.79 | 52.54 | 329 | 150 | V | -55.02 | 0.43 | -3.04 | -58.49 | -13 | 45.49 |
| 1673.20 | 62.21 | 295 | 100 | H | -51.18 | 0.84 | 8.48 | -43.54 | -13 | 30.54 |
| 1673.20 | 60.29 | 256 | 100 | V | -53.10 | 0.84 | 8.48 | -45.46 | -13 | 32.46 |
| WCDMA Mode, High channel | | | | | | | | | | |
| 226.79 | 49.13 | 290 | 150 | H | -58.43 | 0.43 | -3.04 | -61.9 | -13 | 48.9 |
| 226.79 | 52.69 | 221 | 150 | V | -54.87 | 0.43 | -3.04 | -58.34 | -13 | 45.34 |
| 1693.20 | 63.17 | 143 | 100 | H | -49.86 | 0.84 | 8.51 | -42.19 | -13 | 29.19 |
| 1693.20 | 59.53 | 140 | 100 | V | -53.50 | 0.84 | 8.51 | -45.83 | -13 | 32.83 |

30 MHz ~ 20 GHz:

GPRS 1900 Band

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|--------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| GSM Mode, Low channel | | | | | | | | | | |
| 415.23 | 52.48 | 48 | 150 | H | -51.86 | 0.53 | -1.44 | -53.83 | -13 | 40.83 |
| 415.23 | 54.93 | 188 | 150 | V | -49.41 | 0.53 | -1.44 | -51.38 | -13 | 38.38 |
| 3700.4 | 54.73 | 263 | 150 | H | -52.24 | 0.95 | 9.78 | -43.41 | -13 | 30.41 |
| 3700.4 | 53.28 | 357 | 150 | V | -53.69 | 0.95 | 9.78 | -44.86 | -13 | 31.86 |
| GSM Mode, Middle channel | | | | | | | | | | |
| 415.21 | 52.44 | 42 | 150 | H | -51.9 | 0.53 | -1.44 | -53.87 | -13 | 40.87 |
| 415.21 | 54.16 | 263 | 150 | V | -50.18 | 0.53 | -1.44 | -52.15 | -13 | 39.15 |
| 3760 | 55.05 | 307 | 150 | H | -52.16 | 0.95 | 9.74 | -43.37 | -13 | 30.37 |
| 3760 | 53.9 | 180 | 150 | V | -53.31 | 0.95 | 9.74 | -44.52 | -13 | 31.52 |
| GSM Mode, High channel | | | | | | | | | | |
| 415.27 | 53.22 | 3 | 150 | H | -51.12 | 0.53 | -1.44 | -53.09 | -13 | 40.09 |
| 415.27 | 54.8 | 19 | 150 | V | -49.54 | 0.53 | -1.44 | -51.51 | -13 | 38.51 |
| 3819.6 | 54.42 | 238 | 150 | H | -52.17 | 0.96 | 9.71 | -43.42 | -13 | 30.42 |
| 3819.6 | 53.46 | 74 | 150 | V | -53.13 | 0.96 | 9.71 | -44.38 | -13 | 31.38 |

WCDMA Band II

| Frequency (MHz) | Receiver Reading (dBμV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|----------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| WCDMA Mode, Low channel | | | | | | | | | | |
| 415.22 | 54.16 | 282 | 150 | H | -50.18 | 0.53 | -1.44 | -52.15 | -13 | 39.15 |
| 415.22 | 53.89 | 257 | 150 | V | -50.45 | 0.53 | -1.44 | -52.42 | -13 | 39.42 |
| 3704.8 | 46.74 | 93 | 200 | H | -60.22 | 0.95 | 9.78 | -51.39 | -13 | 38.39 |
| 3704.8 | 47.94 | 291 | 100 | V | -59.02 | 0.95 | 9.78 | -50.19 | -13 | 37.19 |
| WCDMA Mode, Middle channel | | | | | | | | | | |
| 415.22 | 53.05 | 78 | 150 | H | -51.29 | 0.53 | -1.44 | -53.26 | -13 | 40.26 |
| 415.22 | 53.19 | 136 | 150 | V | -51.15 | 0.53 | -1.44 | -53.12 | -13 | 40.12 |
| 3760 | 46.96 | 244 | 200 | H | -59.82 | 0.95 | 9.74 | -51.03 | -13 | 38.03 |
| 3760 | 45.71 | 54 | 100 | V | -61.07 | 0.95 | 9.74 | -52.28 | -13 | 39.28 |
| WCDMA Mode, High channel | | | | | | | | | | |
| 415.22 | 53.19 | 233 | 150 | H | -51.15 | 0.53 | -1.44 | -53.12 | -13 | 40.12 |
| 415.22 | 52.76 | 287 | 150 | V | -51.58 | 0.53 | -1.44 | -53.55 | -13 | 40.55 |
| 3815.2 | 47.36 | 250 | 200 | H | -59.24 | 0.96 | 9.71 | -50.49 | -13 | 37.49 |
| 3815.2 | 44.36 | 152 | 100 | V | -62.24 | 0.96 | 9.71 | -53.49 | -13 | 40.49 |

Note:

- 1) Absolute Level (dBm) = Submitted Level (dBm) - Cable loss (dB) + Antenna Gain (dBd/dBi)
- 2) Margin (dB) = Limit (dBm) - Absolute Level (dBm)

WCDMA Band IV

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|----------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| WCDMA Mode, Low channel | | | | | | | | | | |
| 287.54 | 51.30 | 338 | 150 | H | -55.64 | 0.46 | -2.17 | -58.27 | -13 | 45.27 |
| 287.54 | 53.02 | 315 | 150 | V | -53.92 | 0.46 | -2.17 | -56.55 | -13 | 43.55 |
| 3430 | 52.87 | 162 | 200 | H | -55.03 | 0.93 | 9.83 | -46.13 | -13 | 33.13 |
| 3430 | 53.14 | 104 | 100 | V | -54.76 | 0.93 | 9.83 | -45.86 | -13 | 32.86 |
| WCDMA Mode, Middle channel | | | | | | | | | | |
| 287.54 | 51.07 | 141 | 150 | H | -55.87 | 0.46 | -2.17 | -58.5 | -13 | 45.5 |
| 287.54 | 53.16 | 14 | 150 | V | -53.78 | 0.46 | -2.17 | -56.41 | -13 | 43.41 |
| 3465.2 | 53.78 | 276 | 200 | H | -53.97 | 0.93 | 9.87 | -45.03 | -13 | 32.03 |
| 3465.2 | 52.32 | 246 | 100 | V | -55.43 | 0.93 | 9.87 | -46.49 | -13 | 33.49 |
| WCDMA Mode, High channel | | | | | | | | | | |
| 287.54 | 51.19 | 85 | 150 | H | -55.75 | 0.46 | -2.17 | -58.38 | -13 | 45.38 |
| 287.54 | 53.19 | 54 | 150 | V | -53.75 | 0.46 | -2.17 | -56.38 | -13 | 43.38 |
| 3500 | 51.80 | 189 | 200 | H | -55.8 | 0.93 | 9.9 | -46.83 | -13 | 33.83 |
| 3500 | 51.44 | 129 | 100 | V | -56.16 | 0.93 | 9.9 | -47.19 | -13 | 34.19 |

Note:

- 1) Absolute Level (dBm) = Submitted Level (dBm) - Cable loss (dB) + Antenna Gain (dBd/dBi)
- 2) Margin (dB) = Limit (dBm) - Absolute Level (dBm)

Test mode: Transmitting (Pre-scan with all the bandwidth, and worse case as below)

30 MHz ~ 20 GHz:

LTE Band 2:

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|-------------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 1.4MHz Bandwidth Low Channel | | | | | | | | | | |
| 266.68 | 47.81 | 233 | 100 | H | -60.67 | 0.45 | -2.22 | -63.34 | -13 | 50.34 |
| 266.68 | 47.31 | 260 | 200 | V | -61.17 | 0.45 | -2.22 | -63.84 | -13 | 50.84 |
| 3701.40 | 48.88 | 131 | 150 | H | -58.08 | 0.95 | 9.78 | -49.25 | -13 | 36.25 |
| 3701.40 | 49.89 | 203 | 100 | V | -57.07 | 0.95 | 9.78 | -48.24 | -13 | 35.24 |
| 16-QAM 1.4MHz Bandwidth Low Channel | | | | | | | | | | |
| 266.68 | 47.78 | 248 | 150 | H | -60.7 | 0.45 | -2.22 | -58.03 | -13 | 45.03 |
| 266.68 | 47.98 | 329 | 150 | V | -60.5 | 0.45 | -2.22 | -57.83 | -13 | 44.83 |
| 3701.40 | 50.47 | 242 | 200 | H | -56.49 | 0.95 | 9.78 | -47.66 | -13 | 34.66 |
| 3701.40 | 49.36 | 240 | 200 | V | -57.6 | 0.95 | 9.78 | -48.77 | -13 | 35.77 |

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|--|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 1.4MHz Bandwidth Middle Channel | | | | | | | | | | |
| 266.68 | 47.24 | 132 | 100 | H | -61.24 | 0.45 | -2.22 | -63.91 | -13 | 50.91 |
| 266.68 | 48.19 | 102 | 100 | V | -60.29 | 0.45 | -2.22 | -62.96 | -13 | 49.96 |
| 3760 | 48.73 | 81 | 150 | H | -58.05 | 0.95 | 9.74 | -49.26 | -13 | 36.26 |
| 3760 | 49.06 | 186 | 100 | V | -57.72 | 0.95 | 9.74 | -48.93 | -13 | 35.93 |
| 16-QAM 1.4MHz Bandwidth Middle Channel | | | | | | | | | | |
| 266.68 | 48.14 | 187 | 150 | H | -60.34 | 0.45 | -2.22 | -57.67 | -13 | 44.67 |
| 266.68 | 48.12 | 179 | 150 | V | -60.36 | 0.45 | -2.22 | -57.69 | -13 | 44.69 |
| 3760 | 49.53 | 183 | 200 | H | -57.25 | 0.95 | 9.74 | -48.46 | -13 | 35.46 |
| 3760 | 49.43 | 346 | 200 | V | -57.35 | 0.95 | 9.74 | -48.56 | -13 | 35.56 |

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|--------------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 1.4MHz Bandwidth High Channel | | | | | | | | | | |
| 266.68 | 47.53 | 150 | 100 | H | -60.95 | 0.45 | -2.22 | -63.62 | -13 | 50.62 |
| 266.68 | 48.43 | 139 | 200 | V | -60.05 | 0.45 | -2.22 | -57.38 | -13 | 44.38 |
| 3818.60 | 49.08 | 151 | 150 | H | -57.52 | 0.96 | 9.71 | -48.77 | -13 | 35.77 |
| 3818.60 | 50.06 | 258 | 100 | V | -56.54 | 0.96 | 9.71 | -47.79 | -13 | 34.79 |
| 16-QAM 1.4MHz Bandwidth High Channel | | | | | | | | | | |
| 266.68 | 48.17 | 195 | 150 | H | -60.31 | 0.45 | -2.22 | -62.98 | -13 | 49.98 |
| 266.68 | 47.8 | 142 | 150 | V | -60.68 | 0.45 | -2.22 | -63.35 | -13 | 50.35 |
| 3818.60 | 50.44 | 66 | 200 | H | -56.16 | 0.96 | 9.71 | -47.41 | -13 | 34.41 |
| 3818.60 | 49.41 | 201 | 200 | V | -57.19 | 0.96 | 9.71 | -48.44 | -13 | 35.44 |

LTE Band 4:

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|-------------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 1.4MHz Bandwidth Low Channel | | | | | | | | | | |
| 241.46 | 46.56 | 327 | 100 | H | -62.35 | 0.44 | -2.54 | -65.33 | -13 | 52.33 |
| 241.46 | 46.53 | 135 | 200 | V | -62.38 | 0.44 | -2.54 | -65.36 | -13 | 52.36 |
| 3421.40 | 54.41 | 137 | 150 | H | -53.53 | 0.93 | 9.82 | -44.64 | -13 | 31.64 |
| 3421.40 | 55.84 | 240 | 100 | V | -52.1 | 0.93 | 9.82 | -43.21 | -13 | 30.21 |
| 16-QAM 1.4MHz Bandwidth Low Channel | | | | | | | | | | |
| 241.46 | 46.25 | 242 | 150 | H | -62.66 | 0.44 | -2.54 | -59.68 | -13 | 46.68 |
| 241.46 | 46.22 | 359 | 150 | V | -62.69 | 0.44 | -2.54 | -59.71 | -13 | 46.71 |
| 3421.40 | 56.25 | 163 | 200 | H | -51.69 | 0.93 | 9.82 | -42.8 | -13 | 29.8 |
| 3421.40 | 54.8 | 109 | 200 | V | -53.14 | 0.93 | 9.82 | -44.25 | -13 | 31.25 |

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|--|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 1.4MHz Bandwidth Middle Channel | | | | | | | | | | |
| 241.46 | 46 | 7 | 100 | H | -62.91 | 0.44 | -2.54 | -65.89 | -13 | 52.89 |
| 241.46 | 46.7 | 320 | 200 | V | -62.21 | 0.44 | -2.54 | -65.19 | -13 | 52.19 |
| 3465 | 53.9 | 166 | 150 | H | -53.85 | 0.93 | 9.87 | -44.91 | -13 | 31.91 |
| 3465 | 54.88 | 114 | 100 | V | -52.87 | 0.93 | 9.87 | -43.93 | -13 | 30.93 |
| 16-QAM 1.4MHz Bandwidth Middle Channel | | | | | | | | | | |
| 241.46 | 46.64 | 86 | 150 | H | -62.27 | 0.44 | -2.54 | -59.29 | -13 | 46.29 |
| 241.46 | 46.09 | 54 | 150 | V | -62.82 | 0.44 | -2.54 | -59.84 | -13 | 46.84 |
| 3465 | 53.93 | 106 | 200 | H | -53.82 | 0.93 | 9.87 | -44.88 | -13 | 31.88 |
| 3465 | 55.42 | 179 | 200 | V | -52.33 | 0.93 | 9.87 | -43.39 | -13 | 30.39 |

| Frequency (MHz) | Receiver Reading (dBμV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|--------------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 1.4MHz Bandwidth High Channel | | | | | | | | | | |
| 241.46 | 46.93 | 29 | 100 | H | -61.98 | 0.44 | -2.54 | -64.96 | -13 | 51.96 |
| 241.46 | 46.79 | 334 | 200 | V | -62.12 | 0.44 | -2.54 | -65.10 | -13 | 52.10 |
| 3508.60 | 54.85 | 184 | 150 | H | -52.72 | 0.93 | 9.90 | -43.75 | -13 | 30.75 |
| 3508.60 | 55.61 | 240 | 100 | V | -51.96 | 0.93 | 9.90 | -42.99 | -13 | 29.99 |
| 16-QAM 1.4MHz Bandwidth High Channel | | | | | | | | | | |
| 241.46 | 47.03 | 273 | 150 | H | -61.88 | 0.44 | -2.54 | -64.86 | -13 | 51.86 |
| 241.46 | 46.60 | 164 | 150 | V | -62.31 | 0.44 | -2.54 | -65.29 | -13 | 52.29 |
| 3508.60 | 56.37 | 192 | 200 | H | -51.2 | 0.93 | 9.90 | -42.23 | -13 | 29.23 |
| 3508.60 | 54.80 | 33 | 200 | V | -52.77 | 0.93 | 9.90 | -43.80 | -13 | 30.80 |

30 MHz ~ 10 GHz:

LTE Band 5:

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|-------------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 1.4MHz Bandwidth Low Channel | | | | | | | | | | |
| 230.06 | 44.7 | 2 | 100 | H | -63.16 | 0.43 | -2.93 | -66.52 | -13 | 53.52 |
| 230.06 | 44.4 | 127 | 200 | V | -63.46 | 0.43 | -2.93 | -66.82 | -13 | 53.82 |
| 1649.40 | 61.92 | 26 | 150 | H | -51.42 | 0.84 | 8.44 | -43.82 | -13 | 30.82 |
| 1649.40 | 63.12 | 279 | 100 | V | -50.22 | 0.84 | 8.44 | -42.62 | -13 | 29.62 |
| 16-QAM 1.4MHz Bandwidth Low Channel | | | | | | | | | | |
| 230.06 | 44.97 | 263 | 150 | H | -62.89 | 0.43 | -2.93 | -66.25 | -13 | 53.25 |
| 230.06 | 44.45 | 288 | 150 | V | -63.41 | 0.43 | -2.93 | -66.77 | -13 | 53.77 |
| 1649.40 | 63.74 | 175 | 200 | H | -49.6 | 0.84 | 8.44 | -42 | -13 | 29.00 |
| 1649.40 | 62.08 | 202 | 200 | V | -51.26 | 0.84 | 8.44 | -43.66 | -13 | 30.66 |

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|--|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 1.4MHz Bandwidth Middle Channel | | | | | | | | | | |
| 230.06 | 44.36 | 299 | 100 | H | -63.5 | 0.43 | -2.93 | -66.86 | -13 | 53.86 |
| 230.06 | 44.82 | 95 | 200 | V | -63.04 | 0.43 | -2.93 | -66.40 | -13 | 53.40 |
| 1673.00 | 61.75 | 314 | 150 | H | -51.64 | 0.84 | 8.48 | -44.00 | -13 | 31.00 |
| 1673.00 | 62.27 | 18 | 100 | V | -51.12 | 0.84 | 8.48 | -43.48 | -13 | 30.48 |
| 16-QAM 1.4MHz Bandwidth Middle Channel | | | | | | | | | | |
| 230.06 | 44.6 | 114 | 150 | H | -63.26 | 0.43 | -2.93 | -66.62 | -13 | 53.62 |
| 230.06 | 44.45 | 20 | 150 | V | -63.41 | 0.43 | -2.93 | -66.77 | -13 | 53.77 |
| 1673.00 | 61.87 | 178 | 200 | H | -51.52 | 0.84 | 8.48 | -43.88 | -13 | 30.88 |
| 1673.00 | 62.99 | 170 | 200 | V | -50.40 | 0.84 | 8.48 | -42.76 | -13 | 29.76 |

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|--------------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 1.4MHz Bandwidth High Channel | | | | | | | | | | |
| 230.06 | 44.49 | 7 | 100 | H | -63.37 | 0.43 | -2.93 | -66.73 | -13 | 53.73 |
| 230.06 | 45 | 174 | 200 | V | -62.86 | 0.43 | -2.93 | -66.22 | -13 | 53.22 |
| 1696.60 | 61.75 | 213 | 150 | H | -51.26 | 0.84 | 8.51 | -43.59 | -13 | 30.59 |
| 1696.60 | 63.28 | 7 | 100 | V | -49.73 | 0.84 | 8.51 | -42.06 | -13 | 29.06 |
| 16-QAM 1.4MHz Bandwidth High Channel | | | | | | | | | | |
| 230.06 | 44.86 | 121 | 150 | H | -63.00 | 0.43 | -2.93 | -66.36 | -13 | 53.36 |
| 230.06 | 45.22 | 333 | 150 | V | -62.64 | 0.43 | -2.93 | -66.00 | -13 | 53.00 |
| 1696.60 | 63.39 | 350 | 200 | H | -49.62 | 0.84 | 8.51 | -41.95 | -13 | 28.95 |
| 1696.60 | 61.98 | 100 | 200 | V | -51.03 | 0.84 | 8.51 | -43.36 | -13 | 30.36 |

30MHz~26.5GHz:

LTE Band 7:

| Frequency (MHz) | Receiver Reading (dBμV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|-----------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 5MHz Bandwidth Low Channel | | | | | | | | | | |
| 231.76 | 45.15 | 281 | 200 | H | -62.86 | 0.43 | -2.87 | -66.16 | -25 | 41.16 |
| 231.76 | 45.03 | 227 | 200 | V | -62.98 | 0.43 | -2.87 | -66.28 | -25 | 41.28 |
| 5005.00 | 50.8 | 94 | 100 | H | -55.19 | 1.08 | 10.30 | -45.97 | -25 | 20.97 |
| 5005.00 | 50.94 | 72 | 150 | V | -55.05 | 1.08 | 10.30 | -45.83 | -25 | 20.83 |
| 16-QAM 5MHz Bandwidth Low Channel | | | | | | | | | | |
| 231.76 | 45.07 | 252 | 100 | H | -62.94 | 0.43 | -2.87 | -66.24 | -25 | 41.24 |
| 231.76 | 45.25 | 226 | 150 | V | -62.76 | 0.43 | -2.87 | -66.06 | -25 | 41.06 |
| 5005 | 51.12 | 15 | 150 | H | -54.87 | 1.08 | 10.30 | -45.65 | -25 | 20.65 |
| 5005 | 51.28 | 150 | 200 | V | -54.71 | 1.08 | 10.30 | -45.49 | -25 | 20.49 |

| Frequency (MHz) | Receiver Reading (dBμV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|--------------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 5MHz Bandwidth Middle Channel | | | | | | | | | | |
| 231.76 | 44.54 | 162 | 200 | H | -63.47 | 0.43 | -2.87 | -66.77 | -25 | 41.77 |
| 231.76 | 44.87 | 331 | 200 | V | -63.14 | 0.43 | -2.87 | -66.44 | -25 | 41.44 |
| 5070 | 50.18 | 40 | 100 | H | -55.81 | 1.09 | 10.30 | -46.6 | -25 | 21.60 |
| 5070 | 50.58 | 224 | 150 | V | -55.41 | 1.09 | 10.30 | -46.2 | -25 | 21.20 |
| 16-QAM 5MHz Bandwidth Middle Channel | | | | | | | | | | |
| 231.76 | 45.50 | 252 | 100 | H | -62.51 | 0.43 | -2.87 | -65.81 | -25 | 40.81 |
| 231.76 | 45.31 | 290 | 150 | V | -62.70 | 0.43 | -2.87 | -66.00 | -25 | 41.00 |
| 5070 | 50.68 | 239 | 150 | H | -55.31 | 1.09 | 10.30 | -46.10 | -25 | 21.10 |
| 5070 | 50.95 | 92 | 200 | V | -55.04 | 1.09 | 10.30 | -45.83 | -25 | 20.83 |

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|------------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 5MHz Bandwidth High Channel | | | | | | | | | | |
| 231.76 | 45.37 | 189 | 200 | H | -62.64 | 0.43 | -2.87 | -65.94 | -25 | 40.94 |
| 231.76 | 45.43 | 208 | 200 | V | -62.58 | 0.43 | -2.87 | -65.88 | -25 | 40.88 |
| 5135 | 50.71 | 103 | 100 | H | -54.56 | 1.1 | 10.30 | -45.36 | -25 | 20.36 |
| 5135 | 51 | 87 | 150 | V | -54.27 | 1.1 | 10.30 | -45.07 | -25 | 20.07 |
| 16-QAM 5MHz Bandwidth High Channel | | | | | | | | | | |
| 231.76 | 46.33 | 292 | 100 | H | -61.68 | 0.43 | -2.87 | -64.98 | -25 | 39.98 |
| 231.76 | 45.76 | 292 | 150 | V | -62.25 | 0.43 | -2.87 | -65.55 | -25 | 40.55 |
| 5135 | 50.48 | 255 | 150 | H | -54.79 | 1.1 | 10.30 | -45.59 | -25 | 20.59 |
| 5135 | 51.57 | 31 | 200 | V | -53.70 | 1.1 | 10.30 | -44.50 | -25 | 19.50 |

30MHz~10GHz:

LTE Band 12:

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|-------------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 1.4MHz Bandwidth Low Channel | | | | | | | | | | |
| 294.33 | 47.81 | 350 | 100 | H | -58.64 | 0.46 | -2.16 | -61.26 | -13 | 48.26 |
| 294.33 | 47.6 | 260 | 200 | V | -58.85 | 0.46 | -2.16 | -61.47 | -13 | 48.47 |
| 1399.4 | 69.76 | 21 | 150 | H | -44.41 | 0.82 | 7.92 | -37.31 | -13 | 24.31 |
| 1399.4 | 70.33 | 146 | 100 | V | -43.84 | 0.82 | 7.92 | -36.74 | -13 | 23.74 |
| 16-QAM 1.4MHz Bandwidth Low Channel | | | | | | | | | | |
| 223.63 | 48.41 | 335 | 150 | H | -55.23 | 0.43 | -3.15 | -58.81 | -13 | 45.81 |
| 223.63 | 48.31 | 220 | 150 | V | -55.33 | 0.43 | -3.15 | -58.91 | -13 | 45.91 |
| 1399.4 | 70.4 | 105 | 200 | H | -43.77 | 0.82 | 7.92 | -36.67 | -13 | 23.67 |
| 1399.4 | 70.3 | 290 | 200 | V | -43.87 | 0.82 | 7.92 | -36.77 | -13 | 23.77 |

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|--|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 1.4MHz Bandwidth Middle Channel | | | | | | | | | | |
| 294.33 | 43.28 | 330 | 100 | H | -63.17 | 0.46 | -2.16 | -60.55 | -13 | 47.55 |
| 294.33 | 44.1 | 267 | 200 | V | -62.35 | 0.46 | -2.16 | -59.73 | -13 | 46.73 |
| 1415.00 | 68.88 | 327 | 150 | H | -45.32 | 0.82 | 7.96 | -38.18 | -13 | 25.18 |
| 1415.00 | 69.04 | 49 | 100 | V | -45.16 | 0.82 | 7.96 | -38.02 | -13 | 25.02 |
| 16-QAM 1.4MHz Bandwidth Middle Channel | | | | | | | | | | |
| 294.33 | 44.25 | 329 | 150 | H | -62.2 | 0.46 | -2.16 | -59.58 | -13 | 46.58 |
| 294.33 | 44.13 | 298 | 150 | V | -62.32 | 0.46 | -2.16 | -59.70 | -13 | 46.70 |
| 1415.00 | 69.68 | 271 | 200 | H | -44.52 | 0.82 | 7.96 | -37.38 | -13 | 24.38 |
| 1415.00 | 69.82 | 256 | 200 | V | -44.38 | 0.82 | 7.96 | -37.24 | -13 | 24.24 |

| Frequency (MHz) | Receiver Reading (dBμV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|--------------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 1.4MHz Bandwidth High Channel | | | | | | | | | | |
| 294.33 | 43.67 | 347 | 100 | H | -62.78 | 0.46 | -2.16 | -60.16 | -13 | 47.16 |
| 294.33 | 43.51 | 181 | 200 | V | -62.94 | 0.46 | -2.16 | -60.32 | -13 | 47.32 |
| 1430.6 | 69.44 | 272 | 150 | H | -44.79 | 0.82 | 8 | -37.61 | -13 | 24.61 |
| 1430.6 | 70.01 | 57 | 100 | V | -44.22 | 0.82 | 8 | -37.04 | -13 | 24.04 |
| 16-QAM 1.4MHz Bandwidth High Channel | | | | | | | | | | |
| 294.33 | 43.68 | 260 | 150 | H | -62.77 | 0.46 | -2.16 | -60.15 | -13 | 47.15 |
| 294.33 | 43.32 | 175 | 150 | V | -63.13 | 0.46 | -2.16 | -60.51 | -13 | 47.51 |
| 1430.6 | 70.55 | 55 | 200 | H | -43.68 | 0.82 | 8 | -36.5 | -13 | 23.50 |
| 1430.6 | 70.35 | 312 | 200 | V | -43.88 | 0.82 | 8 | -36.7 | -13 | 23.70 |

LTE Band 17:

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|-----------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 5MHz Bandwidth Low Channel | | | | | | | | | | |
| 241.46 | 44.26 | 352 | 100 | H | -64.65 | 0.44 | -2.54 | -67.63 | -13 | 54.63 |
| 241.46 | 44.86 | 273 | 200 | V | -64.05 | 0.44 | -2.54 | -67.03 | -13 | 54.03 |
| 1413.00 | 64.98 | 218 | 150 | H | -49.99 | 0.83 | 8.06 | -42.76 | -13 | 29.76 |
| 1413.00 | 65.91 | 264 | 100 | V | -49.06 | 0.83 | 8.06 | -41.83 | -13 | 28.83 |
| 16-QAM 5MHz Bandwidth Low Channel | | | | | | | | | | |
| 241.46 | 45.42 | 302 | 100 | H | -63.49 | 0.44 | -2.54 | -66.47 | -13 | 53.47 |
| 241.46 | 44.46 | 305 | 200 | V | -64.45 | 0.44 | -2.54 | -67.43 | -13 | 54.43 |
| 1413.00 | 65.91 | 206 | 200 | H | -49.06 | 0.83 | 8.06 | -41.83 | -13 | 28.83 |
| 1413.00 | 65.91 | 113 | 200 | V | -49.06 | 0.83 | 8.06 | -41.83 | -13 | 28.83 |

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|--------------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 5MHz Bandwidth Middle Channel | | | | | | | | | | |
| 241.46 | 43.77 | 118 | 100 | H | -65.14 | 0.44 | -2.54 | -68.12 | -13 | 55.12 |
| 241.46 | 44.35 | 320 | 200 | V | -64.56 | 0.44 | -2.54 | -67.54 | -13 | 54.54 |
| 1420 | 64.73 | 335 | 150 | H | -50.19 | 0.83 | 8.07 | -42.95 | -13 | 29.95 |
| 1420 | 64.97 | 216 | 100 | V | -49.95 | 0.83 | 8.07 | -42.71 | -13 | 29.71 |
| 16-QAM 5MHz Bandwidth Middle Channel | | | | | | | | | | |
| 241.46 | 43.98 | 162 | 100 | H | -64.93 | 0.44 | -2.54 | -67.91 | -13 | 54.91 |
| 241.46 | 43.83 | 197 | 200 | V | -65.08 | 0.44 | -2.54 | -68.06 | -13 | 55.06 |
| 1420 | 65.39 | 137 | 200 | H | -49.53 | 0.83 | 8.07 | -42.29 | -13 | 29.29 |
| 1420 | 65.75 | 72 | 200 | V | -49.17 | 0.83 | 8.07 | -41.93 | -13 | 28.93 |

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|------------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 5MHz Bandwidth High Channel | | | | | | | | | | |
| 241.46 | 44.08 | 117 | 100 | H | -64.83 | 0.44 | -2.54 | -67.81 | -13 | 54.81 |
| 241.46 | 43.92 | 70 | 200 | V | -64.99 | 0.44 | -2.54 | -67.97 | -13 | 54.97 |
| 1427 | 65.54 | 8 | 150 | H | -49.34 | 0.83 | 8.08 | -42.09 | -13 | 29.09 |
| 1427 | 65.83 | 305 | 100 | V | -49.05 | 0.83 | 8.08 | -41.8 | -13 | 28.80 |
| 16-QAM 5MHz Bandwidth High Channel | | | | | | | | | | |
| 241.46 | 43.85 | 339 | 100 | H | -65.06 | 0.44 | -2.54 | -68.04 | -13 | 55.04 |
| 241.46 | 44.03 | 117 | 200 | V | -64.88 | 0.44 | -2.54 | -67.86 | -13 | 54.86 |
| 1427 | 66.78 | 128 | 200 | H | -48.1 | 0.83 | 8.08 | -40.85 | -13 | 27.85 |
| 1427 | 66.32 | 136 | 200 | V | -48.56 | 0.83 | 8.08 | -41.31 | -13 | 28.31 |

30 MHz ~ 20 GHz:

LTE Band 25:

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|-------------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 1.4MHz Bandwidth Low Channel | | | | | | | | | | |
| 290.69 | 41.94 | 267 | 100 | H | -64.77 | 0.46 | -2.17 | -67.4 | -13 | 54.40 |
| 290.69 | 42.85 | 346 | 200 | V | -63.86 | 0.46 | -2.17 | -66.49 | -13 | 53.49 |
| 3611.4 | 49.56 | 249 | 150 | H | -57.69 | 0.94 | 9.83 | -48.8 | -13 | 35.80 |
| 3611.4 | 50.16 | 1 | 100 | V | -57.09 | 0.94 | 9.83 | -48.2 | -13 | 35.20 |
| 16-QAM 1.4MHz Bandwidth Low Channel | | | | | | | | | | |
| 290.69 | 43.15 | 141 | 100 | H | -63.56 | 0.46 | -2.17 | -66.19 | -13 | 53.19 |
| 290.69 | 42.72 | 143 | 200 | V | -63.99 | 0.46 | -2.17 | -66.62 | -13 | 53.62 |
| 3611.4 | 50.06 | 317 | 200 | H | -57.19 | 0.94 | 9.83 | -48.3 | -13 | 35.30 |
| 3611.4 | 49.92 | 85 | 200 | V | -57.33 | 0.94 | 9.83 | -48.44 | -13 | 35.44 |

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|--|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 1.4MHz Bandwidth Middle Channel | | | | | | | | | | |
| 290.69 | 41.79 | 162 | 100 | H | -64.92 | 0.46 | -2.17 | -67.55 | -13 | 54.55 |
| 290.69 | 41.96 | 22 | 200 | V | -64.75 | 0.46 | -2.17 | -67.38 | -13 | 54.38 |
| 3765 | 48.31 | 321 | 150 | H | -58.45 | 0.95 | 9.74 | -49.66 | -13 | 36.66 |
| 3765 | 48.38 | 287 | 100 | V | -58.38 | 0.95 | 9.74 | -49.59 | -13 | 36.59 |
| 16-QAM 1.4MHz Bandwidth Middle Channel | | | | | | | | | | |
| 290.69 | 42.17 | 243 | 100 | H | -64.54 | 0.46 | -2.17 | -67.17 | -13 | 54.17 |
| 290.69 | 42.42 | 44 | 200 | V | -64.29 | 0.46 | -2.17 | -66.92 | -13 | 53.92 |
| 3765 | 49.22 | 156 | 200 | H | -57.54 | 0.95 | 9.74 | -48.75 | -13 | 35.75 |
| 3765 | 49.25 | 29 | 200 | V | -57.51 | 0.95 | 9.74 | -48.72 | -13 | 35.72 |

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|--------------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 1.4MHz Bandwidth High Channel | | | | | | | | | | |
| 290.69 | 42.69 | 108 | 100 | H | -64.02 | 0.46 | -2.17 | -66.65 | -13 | 53.65 |
| 290.69 | 42.21 | 355 | 200 | V | -64.5 | 0.46 | -2.17 | -67.13 | -13 | 54.13 |
| 3828.6 | 48.79 | 140 | 150 | H | -57.77 | 0.96 | 9.7 | -49.03 | -13 | 36.03 |
| 3828.6 | 49.04 | 224 | 100 | V | -57.52 | 0.96 | 9.7 | -48.78 | -13 | 35.78 |
| 16-QAM 1.4MHz Bandwidth High Channel | | | | | | | | | | |
| 290.69 | 41.98 | 349 | 100 | H | -64.73 | 0.46 | -2.17 | -67.36 | -13 | 54.36 |
| 290.69 | 41.81 | 163 | 200 | V | -64.9 | 0.46 | -2.17 | -67.53 | -13 | 54.53 |
| 3828.6 | 49.21 | 183 | 200 | H | -57.35 | 0.96 | 9.7 | -48.61 | -13 | 35.61 |
| 3828.6 | 49.13 | 351 | 200 | V | -57.43 | 0.96 | 9.7 | -48.69 | -13 | 35.69 |

30 MHz ~ 10 GHz:

LTE Band 26:

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|-------------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 1.4MHz Bandwidth Low Channel | | | | | | | | | | |
| 230.67 | 43.33 | 137 | 100 | H | -64.58 | 0.43 | -2.91 | -67.92 | -13 | 54.92 |
| 230.67 | 44.26 | 137 | 200 | V | -63.65 | 0.43 | -2.91 | -66.99 | -13 | 53.99 |
| 1629.4 | 51.88 | 193 | 100 | H | -61.59 | 0.84 | 8.41 | -54.02 | -13 | 41.02 |
| 1629.4 | 52.21 | 234 | 150 | V | -61.26 | 0.84 | 8.41 | -53.69 | -13 | 40.69 |
| 16-QAM 1.4MHz Bandwidth Low Channel | | | | | | | | | | |
| 230.67 | 43.43 | 352 | 100 | H | -64.48 | 0.43 | -2.91 | -67.82 | -13 | 54.82 |
| 230.67 | 44.31 | 197 | 150 | V | -63.6 | 0.43 | -2.91 | -40.35 | -13 | 27.35 |
| 1629.4 | 53.17 | 156 | 150 | H | -60.30 | 0.84 | 8.41 | -52.73 | -13 | 39.73 |
| 1629.4 | 52.50 | 227 | 200 | V | -60.97 | 0.84 | 8.41 | -53.4 | -13 | 40.40 |

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|--|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 1.4MHz Bandwidth Middle Channel | | | | | | | | | | |
| 230.67 | 42.73 | 7 | 100 | H | -65.18 | 0.43 | -2.91 | -68.52 | -13 | 55.52 |
| 230.67 | 43.04 | 135 | 200 | V | -64.87 | 0.43 | -2.91 | -68.21 | -13 | 55.21 |
| 1663 | 50.80 | 116 | 100 | H | -62.44 | 0.84 | 8.46 | -54.82 | -13 | 41.82 |
| 1663 | 50.89 | 333 | 150 | V | -62.35 | 0.84 | 8.46 | -54.73 | -13 | 41.73 |
| 16-QAM 1.4MHz Bandwidth Middle Channel | | | | | | | | | | |
| 230.67 | 43.41 | 36 | 100 | H | -64.5 | 0.43 | -2.91 | -67.84 | -13 | 54.84 |
| 230.67 | 43.12 | 119 | 200 | V | -64.79 | 0.43 | -2.91 | -68.13 | -13 | 55.13 |
| 1663 | 51.2 | 262 | 150 | H | -62.04 | 0.84 | 8.46 | -54.42 | -13 | 41.42 |
| 1663 | 51.82 | 232 | 200 | V | -61.42 | 0.84 | 8.46 | -53.8 | -13 | 40.80 |

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|--------------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 1.4MHz Bandwidth High Channel | | | | | | | | | | |
| 230.67 | 43.54 | 305 | 100 | H | -64.37 | 0.43 | -2.91 | -67.71 | -13 | 54.71 |
| 230.67 | 43.42 | 344 | 200 | V | -64.49 | 0.43 | -2.91 | -67.83 | -13 | 54.83 |
| 1696.6 | 51.01 | 317 | 100 | H | -62.00 | 0.84 | 8.51 | -54.33 | -13 | 41.33 |
| 1696.6 | 51.40 | 224 | 150 | V | -61.61 | 0.84 | 8.51 | -53.94 | -13 | 40.94 |
| 16-QAM 1.4MHz Bandwidth High Channel | | | | | | | | | | |
| 230.67 | 43.33 | 111 | 100 | H | -64.58 | 0.43 | -2.91 | -67.92 | -13 | 54.92 |
| 230.67 | 42.95 | 5 | 200 | V | -64.96 | 0.43 | -2.91 | -68.3 | -13 | 55.30 |
| 1696.6 | 52.39 | 6 | 150 | H | -60.62 | 0.84 | 8.51 | -52.95 | -13 | 39.95 |
| 1696.6 | 51.53 | 140 | 200 | V | -61.48 | 0.84 | 8.51 | -53.81 | -13 | 40.81 |

30 MHz ~ 26.5 GHz:

LTE Band 40(2305MHz-2315MHz):

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|-----------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 5MHz Bandwidth Low Channel | | | | | | | | | | |
| 294.57 | 44.95 | 308 | 150 | H | -61.48 | 0.46 | -2.16 | -64.10 | -40 | 24.1 |
| 294.57 | 45.91 | 103 | 200 | V | -60.52 | 0.46 | -2.16 | -63.14 | -40 | 23.14 |
| 4615.00 | 51.27 | 320 | 100 | H | -55.65 | 1.03 | 9.99 | -46.69 | -40 | 6.69 |
| 4615.00 | 52.59 | 92 | 100 | V | -54.33 | 1.03 | 9.99 | -45.37 | -40 | 5.37 |
| 16-QAM 5MHz Bandwidth Low Channel | | | | | | | | | | |
| 294.57 | 45.78 | 184 | 200 | H | -60.65 | 0.46 | -2.16 | -63.27 | -40 | 23.27 |
| 294.57 | 45.38 | 266 | 150 | V | -61.05 | 0.46 | -2.16 | -63.67 | -40 | 23.67 |
| 4615.00 | 53.22 | 278 | 150 | H | -53.70 | 1.03 | 9.99 | -44.74 | -40 | 4.74 |
| 4615.00 | 51.58 | 260 | 100 | V | -55.34 | 1.03 | 9.99 | -46.38 | -40 | 6.38 |

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|--------------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 5MHz Bandwidth Middle Channel | | | | | | | | | | |
| 294.57 | 44.95 | 218 | 150 | H | -61.48 | 0.46 | -2.16 | -64.10 | -40 | 24.10 |
| 294.57 | 45.17 | 102 | 200 | V | -61.26 | 0.46 | -2.16 | -63.88 | -40 | 23.88 |
| 4620.00 | 51.07 | 20 | 100 | H | -55.84 | 1.03 | 10.00 | -46.87 | -40 | 6.87 |
| 4620.00 | 51.62 | 328 | 100 | V | -55.29 | 1.03 | 10.00 | -46.32 | -40 | 6.32 |
| 16-QAM 5MHz Bandwidth Middle Channel | | | | | | | | | | |
| 294.57 | 45.64 | 246 | 200 | H | -60.79 | 0.46 | -2.16 | -63.41 | -40 | 23.41 |
| 294.57 | 45.12 | 251 | 150 | V | -61.31 | 0.46 | -2.16 | -63.93 | -40 | 23.93 |
| 4620.00 | 51.67 | 162 | 150 | H | -55.24 | 1.03 | 10.00 | -46.27 | -40 | 6.27 |
| 4620.00 | 51.9 | 348 | 100 | V | -55.01 | 1.03 | 10.00 | -46.04 | -40 | 6.04 |

| Frequency (MHz) | Receiver Reading (dBμV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|------------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 5MHz Bandwidth High Channel | | | | | | | | | | |
| 294.57 | 45.03 | 167 | 150 | H | -61.4 | 0.46 | -2.16 | -64.02 | -40 | 24.02 |
| 294.57 | 45.45 | 178 | 200 | V | -60.98 | 0.46 | -2.16 | -63.60 | -40 | 23.6 |
| 4625.00 | 52.2 | 43 | 100 | H | -54.7 | 1.04 | 10.00 | -45.74 | -40 | 5.74 |
| 4625.00 | 52.85 | 156 | 100 | V | -54.05 | 1.04 | 10.00 | -45.09 | -40 | 5.09 |
| 16-QAM 5MHz Bandwidth High Channel | | | | | | | | | | |
| 294.57 | 46.27 | 281 | 200 | H | -60.16 | 0.46 | -2.16 | -62.78 | -40 | 22.78 |
| 294.57 | 45.94 | 167 | 150 | V | -60.49 | 0.46 | -2.16 | -63.11 | -40 | 23.11 |
| 4625.00 | 54.17 | 28 | 150 | H | -52.73 | 1.04 | 10.00 | -43.77 | -40 | 3.77 |
| 4625.00 | 52.01 | 349 | 100 | V | -54.89 | 1.04 | 10.00 | -45.93 | -40 | 5.93 |

LTE Band 40(2350MHz-2360MHz):

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|-----------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 5MHz Bandwidth Low Channel | | | | | | | | | | |
| 294.57 | 46.70 | 154 | 150 | H | -59.73 | 0.46 | -2.16 | -62.35 | -40 | 22.35 |
| 294.57 | 46.07 | 178 | 200 | V | -60.36 | 0.46 | -2.16 | -62.98 | -40 | 22.98 |
| 4705.00 | 51.81 | 67 | 100 | H | -54.9 | 1.04 | 10.06 | -45.88 | -40 | 5.88 |
| 4705.00 | 52.39 | 353 | 100 | V | -54.32 | 1.04 | 10.06 | -45.3 | -40 | 5.30 |
| 16-QAM 5MHz Bandwidth Low Channel | | | | | | | | | | |
| 221.69 | 46.3 | 29 | 200 | H | -60.13 | 0.46 | -2.16 | -62.75 | -40 | 22.75 |
| 221.69 | 45.84 | 188 | 150 | V | -60.59 | 0.46 | -2.16 | -63.21 | -40 | 23.21 |
| 4705.00 | 53.05 | 64 | 150 | H | -53.66 | 1.04 | 10.06 | -44.64 | -40 | 4.64 |
| 4705.00 | 52.4 | 310 | 100 | V | -54.31 | 1.04 | 10.06 | -45.29 | -40 | 5.29 |

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|--------------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 5MHz Bandwidth Middle Channel | | | | | | | | | | |
| 294.57 | 45.79 | 13 | 150 | H | -60.64 | 0.46 | -2.16 | -63.26 | -40 | 23.26 |
| 294.57 | 46.47 | 289 | 200 | V | -59.96 | 0.46 | -2.16 | -62.58 | -40 | 22.58 |
| 4710.00 | 51.67 | 165 | 100 | H | -55.03 | 1.05 | 10.07 | -46.01 | -40 | 6.01 |
| 4710.00 | 52.02 | 345 | 100 | V | -54.68 | 1.05 | 10.07 | -45.66 | -40 | 5.66 |
| 16-QAM 5MHz Bandwidth Middle Channel | | | | | | | | | | |
| 294.57 | 45.99 | 264 | 200 | H | -60.44 | 0.46 | -2.16 | -63.06 | -40 | 23.06 |
| 294.57 | 45.88 | 12 | 150 | V | -60.55 | 0.46 | -2.16 | -63.17 | -40 | 23.17 |
| 4710.00 | 52.17 | 274 | 150 | H | -54.53 | 1.05 | 10.07 | -45.51 | -40 | 5.51 |
| 4710.00 | 52.52 | 43 | 100 | V | -54.18 | 1.05 | 10.07 | -45.16 | -40 | 5.16 |

| Frequency (MHz) | Receiver Reading (dBμV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|------------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 5MHz Bandwidth High Channel | | | | | | | | | | |
| 294.57 | 46.75 | 90 | 150 | H | -59.68 | 0.46 | -2.16 | -62.30 | -40 | 22.30 |
| 294.57 | 47.57 | 219 | 200 | V | -58.86 | 0.46 | -2.16 | -61.48 | -40 | 21.48 |
| 4715.00 | 52.73 | 39 | 100 | H | -53.96 | 1.05 | 10.07 | -44.94 | -40 | 4.94 |
| 4715.00 | 52.6 | 291 | 100 | V | -54.09 | 1.05 | 10.07 | -45.07 | -40 | 5.07 |
| 16-QAM 5MHz Bandwidth High Channel | | | | | | | | | | |
| 294.57 | 46.47 | 274 | 200 | H | -59.96 | 0.46 | -2.16 | -62.58 | -40 | 22.58 |
| 294.57 | 46.47 | 248 | 150 | V | -59.96 | 0.46 | -2.16 | -62.58 | -40 | 22.58 |
| 4715.00 | 53.26 | 257 | 150 | H | -53.43 | 1.05 | 10.07 | -44.41 | -40 | 4.41 |
| 4715.00 | 52.59 | 10 | 100 | V | -54.1 | 1.05 | 10.07 | -45.08 | -40 | 5.08 |

LTE Band 41:

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|-----------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 5MHz Bandwidth Low Channel | | | | | | | | | | |
| 300.51 | 44.8 | 80 | 150 | H | -61.21 | 0.46 | -2.15 | -63.82 | -25 | 38.82 |
| 300.51 | 45.16 | 215 | 200 | V | -60.85 | 0.46 | -2.15 | -63.46 | -25 | 38.46 |
| 5115.00 | 49.25 | 307 | 100 | H | -56.13 | 1.09 | 10.30 | -46.92 | -25 | 21.92 |
| 5115.00 | 50.07 | 98 | 100 | V | -55.31 | 1.09 | 10.30 | -46.10 | -25 | 21.10 |
| 16-QAM 5MHz Bandwidth Low Channel | | | | | | | | | | |
| 300.51 | 44.99 | 263 | 200 | H | -61.02 | 0.46 | -2.15 | -63.63 | -25 | 38.63 |
| 300.51 | 44.95 | 247 | 150 | V | -61.06 | 0.46 | -2.15 | -63.67 | -25 | 38.67 |
| 5115.00 | 51.07 | 341 | 150 | H | -54.31 | 1.09 | 10.30 | -45.10 | -25 | 20.10 |
| 5115.000 | 49.75 | 188 | 100 | V | -55.63 | 1.09 | 10.30 | -46.42 | -25 | 21.42 |

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|--------------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 5MHz Bandwidth Middle Channel | | | | | | | | | | |
| 300.51 | 44.30 | 132 | 150 | H | -61.71 | 0.46 | -2.15 | -64.32 | -25 | 39.32 |
| 300.51 | 45.11 | 304 | 200 | V | -60.9 | 0.46 | -2.15 | -63.51 | -25 | 38.51 |
| 5210.00 | 49.20 | 185 | 100 | H | -56.18 | 1.11 | 10.30 | -46.99 | -25 | 21.99 |
| 5210.00 | 50.01 | 135 | 100 | V | -55.37 | 1.11 | 10.30 | -46.18 | -25 | 21.18 |
| 16-QAM 5MHz Bandwidth Middle Channel | | | | | | | | | | |
| 300.51 | 44.40 | 234 | 200 | H | -61.61 | 0.46 | -2.15 | -64.22 | -25 | 39.22 |
| 300.51 | 45.27 | 215 | 150 | V | -60.74 | 0.46 | -2.15 | -63.35 | -25 | 38.35 |
| 5210.00 | 49.97 | 143 | 150 | H | -55.41 | 1.11 | 10.30 | -46.22 | -25 | 21.22 |
| 5210.00 | 50.37 | 141 | 100 | V | -55.01 | 1.11 | 10.30 | -45.82 | -25 | 20.82 |

| Frequency (MHz) | Receiver Reading (dBμV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|------------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 5MHz Bandwidth High Channel | | | | | | | | | | |
| 300.51 | 44.81 | 297 | 150 | H | -61.2 | 0.46 | -2.15 | -63.81 | -25 | 38.81 |
| 300.51 | 45.16 | 56 | 200 | V | -60.85 | 0.46 | -2.15 | -63.46 | -25 | 38.46 |
| 5305.00 | 49.11 | 51 | 100 | H | -55.21 | 1.12 | 10.30 | -46.03 | -25 | 21.03 |
| 5305.00 | 49.56 | 175 | 100 | V | -54.76 | 1.12 | 10.30 | -45.58 | -25 | 20.58 |
| 16-QAM 5MHz Bandwidth High Channel | | | | | | | | | | |
| 300.51 | 45.23 | 209 | 200 | H | -60.78 | 0.46 | -2.15 | -63.39 | -25 | 38.39 |
| 300.51 | 45.24 | 65 | 150 | V | -60.77 | 0.46 | -2.15 | -63.38 | -25 | 38.38 |
| 5305.00 | 50.28 | 15 | 150 | H | -54.04 | 1.12 | 10.30 | -44.86 | -25 | 19.86 |
| 5305.00 | 49.72 | 5 | 100 | V | -54.6 | 1.12 | 10.30 | -45.42 | -25 | 20.42 |

30 MHz ~ 20 GHz:

LTE Band 66:

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|-------------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 1.4MHz Bandwidth Low Channel | | | | | | | | | | |
| 234.55 | 44.24 | 327 | 150 | H | -64.03 | 0.43 | -2.78 | -67.24 | -13 | 54.24 |
| 234.55 | 45.46 | 7 | 200 | V | -62.81 | 0.43 | -2.78 | -66.02 | -13 | 53.02 |
| 3421.40 | 50.75 | 200 | 100 | H | -57.19 | 0.93 | 9.82 | -48.30 | -13 | 35.30 |
| 3421.40 | 50.34 | 305 | 100 | V | -57.6 | 0.93 | 9.82 | -48.71 | -13 | 35.71 |
| 16-QAM 1.4MHz Bandwidth Low Channel | | | | | | | | | | |
| 234.55 | 45.55 | 286 | 200 | H | -62.72 | 0.43 | -2.78 | -65.93 | -13 | 52.93 |
| 234.55 | 45.28 | 235 | 150 | V | -62.99 | 0.43 | -2.78 | -66.20 | -13 | 53.20 |
| 3421.40 | 51.98 | 185 | 150 | H | -55.96 | 0.93 | 9.82 | -47.07 | -13 | 34.07 |
| 3421.40 | 51.76 | 183 | 100 | V | -56.18 | 0.93 | 9.82 | -47.29 | -13 | 34.29 |

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|--|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 1.4MHz Bandwidth Middle Channel | | | | | | | | | | |
| 234.55 | 44.23 | 339 | 150 | H | -64.04 | 0.43 | -2.78 | -60.83 | -13 | 47.83 |
| 234.55 | 44.57 | 133 | 200 | V | -63.7 | 0.43 | -2.78 | -60.49 | -13 | 47.49 |
| 3490 | 49.58 | 110 | 100 | H | -58.06 | 0.93 | 9.89 | -49.1 | -13 | 36.1 |
| 3490 | 50.17 | 13 | 100 | V | -57.47 | 0.93 | 9.89 | -48.51 | -13 | 35.51 |
| 16-QAM 1.4MHz Bandwidth Middle Channel | | | | | | | | | | |
| 234.55 | 44.41 | 127 | 200 | H | -63.86 | 0.43 | -2.78 | -60.65 | -13 | 47.65 |
| 234.55 | 44.40 | 172 | 150 | V | -63.87 | 0.43 | -2.78 | -60.66 | -13 | 47.66 |
| 3490 | 49.95 | 49 | 150 | H | -57.69 | 0.93 | 9.89 | -48.73 | -13 | 35.73 |
| 3490 | 50.68 | 339 | 100 | V | -56.96 | 0.93 | 9.89 | -48 | -13 | 35 |

| Frequency (MHz) | Receiver Reading (dBµV) | Turntable Angle Degree | Rx Antenna | | Substituted | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|--------------------------------------|-------------------------|------------------------|-------------|-------------|-----------------------|-----------------|------------------------|----------------------|-------------|-------------|
| | | | Height (cm) | Polar (H/V) | Submitted Level (dBm) | Cable Loss (dB) | Antenna Gain (dBd/dBi) | | | |
| QPSK 1.4MHz Bandwidth High Channel | | | | | | | | | | |
| 234.55 | 45 | 66 | 150 | H | -63.27 | 0.43 | -2.78 | -60.06 | -13 | 47.06 |
| 234.55 | 44.85 | 44 | 200 | V | -63.42 | 0.43 | -2.78 | -60.21 | -13 | 47.21 |
| 3558.6 | 49.79 | 240 | 100 | H | -57.63 | 0.93 | 9.87 | -48.69 | -13 | 35.69 |
| 3558.6 | 50.82 | 36 | 100 | V | -56.6 | 0.93 | 9.87 | -47.66 | -13 | 34.66 |
| 16-QAM 1.4MHz Bandwidth High Channel | | | | | | | | | | |
| 234.55 | 44.6 | 43 | 200 | H | -63.67 | 0.43 | -2.78 | -60.46 | -13 | 47.46 |
| 234.55 | 44.77 | 254 | 150 | V | -63.5 | 0.43 | -2.78 | -60.29 | -13 | 47.29 |
| 3558.6 | 50.97 | 267 | 150 | H | -56.45 | 0.93 | 9.87 | -47.51 | -13 | 34.51 |
| 3558.6 | 49.91 | 301 | 100 | V | -57.51 | 0.93 | 9.87 | -48.57 | -13 | 35.57 |

Note:

- 1) Absolute Level (dBm) = Submitted Level (dBm) - Cable loss (dB) + Antenna Gain (dBd/dBi)
- 2) Margin (dB) = Limit (dBm) - Absolute Level (dBm)

FCC § 22.917 (a); § 24.238 (a); §27.53 (a) (g) (h) (m); § 90.691 - BAND EDGES

Applicable Standards

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to FCC §27.53 (h) (m), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

FCC §2.1051 and §90.691(a).The power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or less, but at least one percent of the emission bandwidth of the fundamental emission of the transmitter, provided the measured energy is integrated over a 1 MHz bandwidth.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

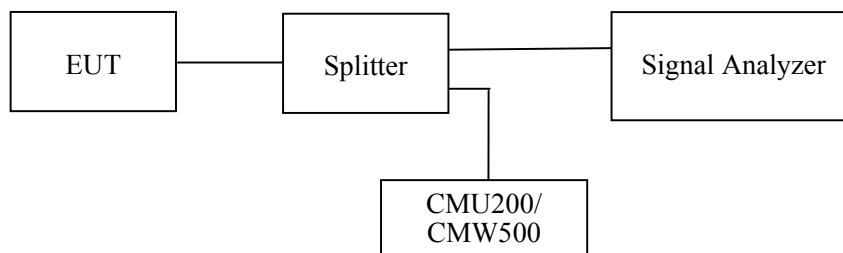

Test Data

Environmental Conditions

| | |
|---------------------------|-----------------|
| Temperature: | 24.9~25.3 °C |
| Relative Humidity: | 49~50 % |
| ATM Pressure: | 100.7~102.9 kPa |


The testing was performed by Miller Xie from 2021-04-29 to 2021-06-09.

EUT operation mode: Transmitting


Test Result: Compliant.

GSM 850 Band:


GPRS Mode, Left Band Edge

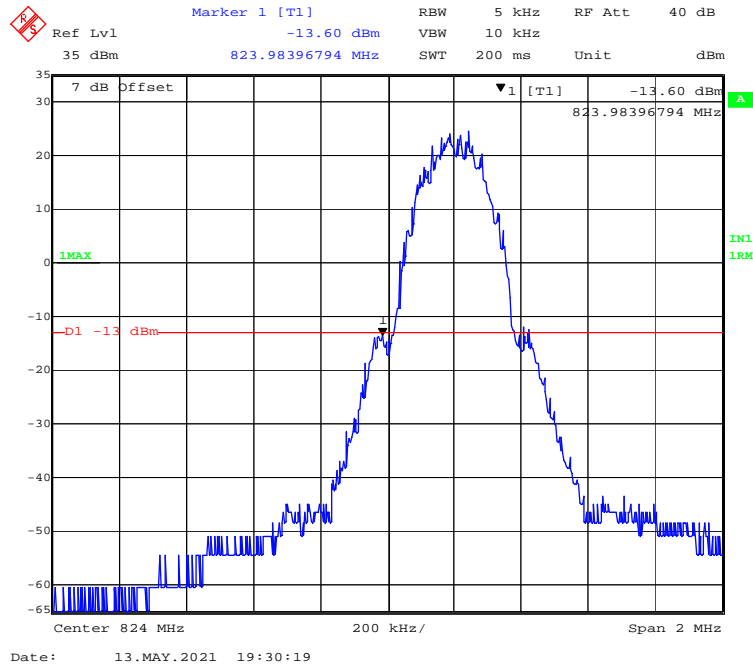

GPRS Mode, Right Band Edge

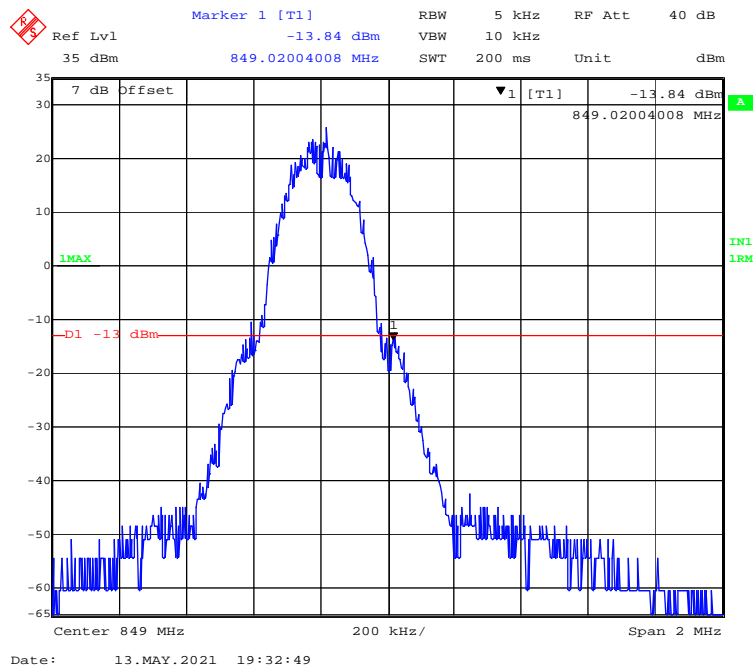

EGPRS Mode, Left Band Edge

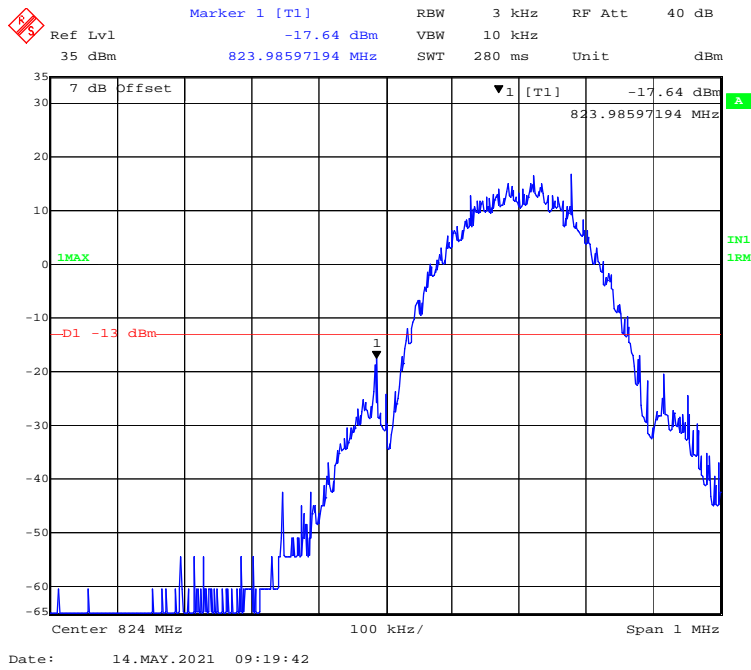


EGPRS Mode, Right Band Edge




WCDMA Band V


WCDMA (Rel 99) Mode, Left Band Edge

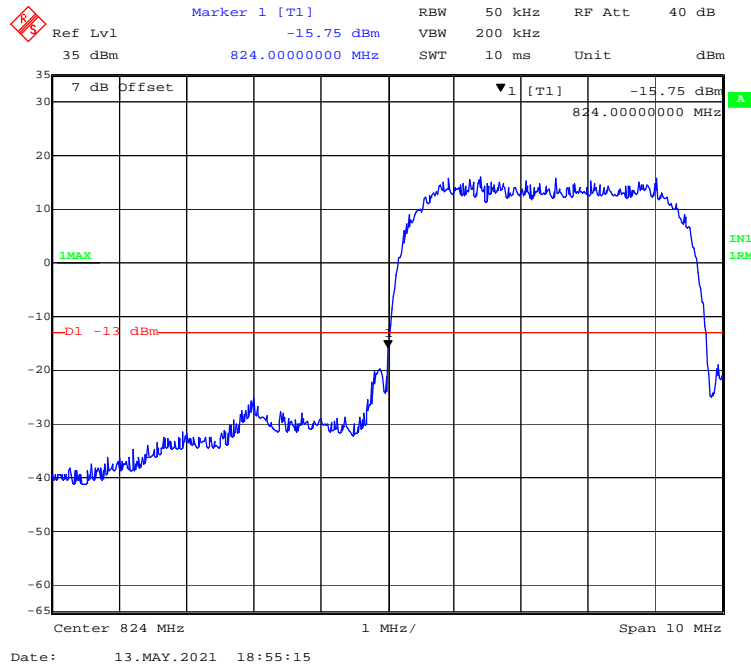


WCDMA (Rel 99) Mode, Right Band Edge

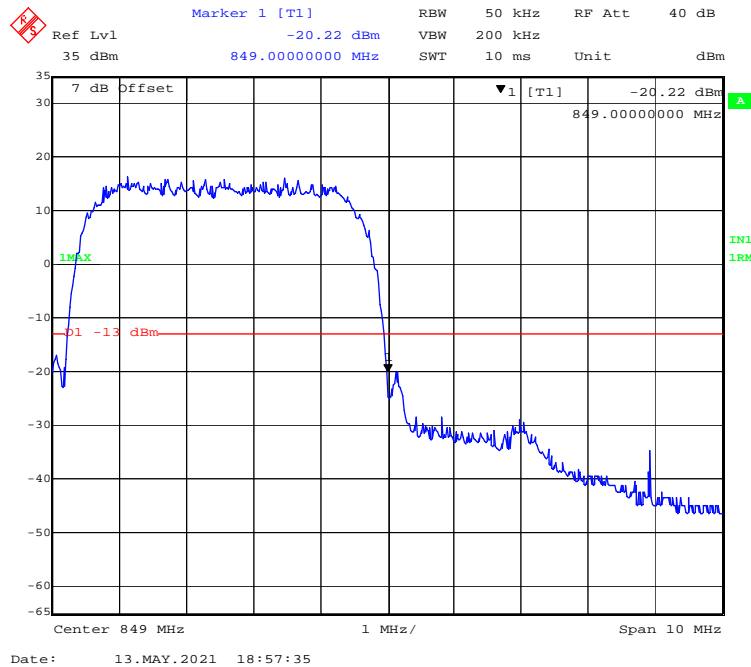


WCDMA (HSDPA) Mode, Left Band Edge

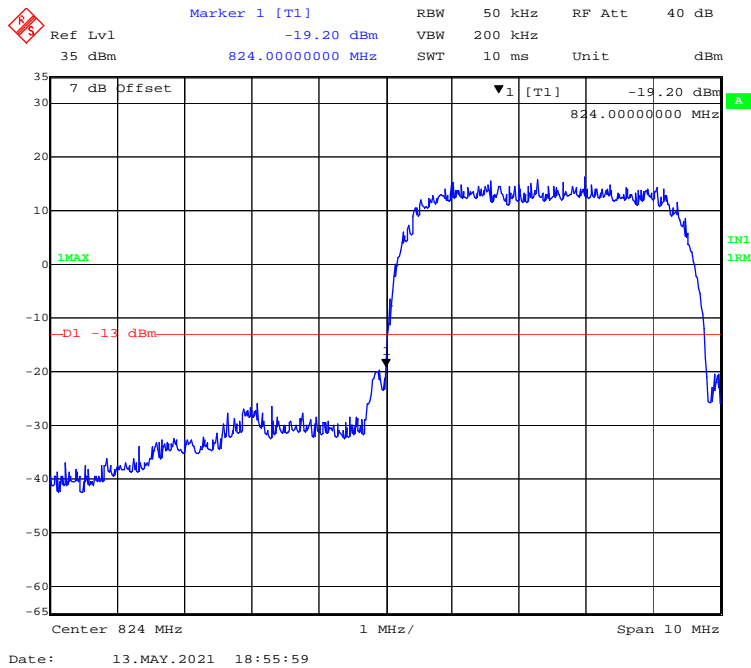

WCDMA (HSDPA) Mode, Right Band Edge

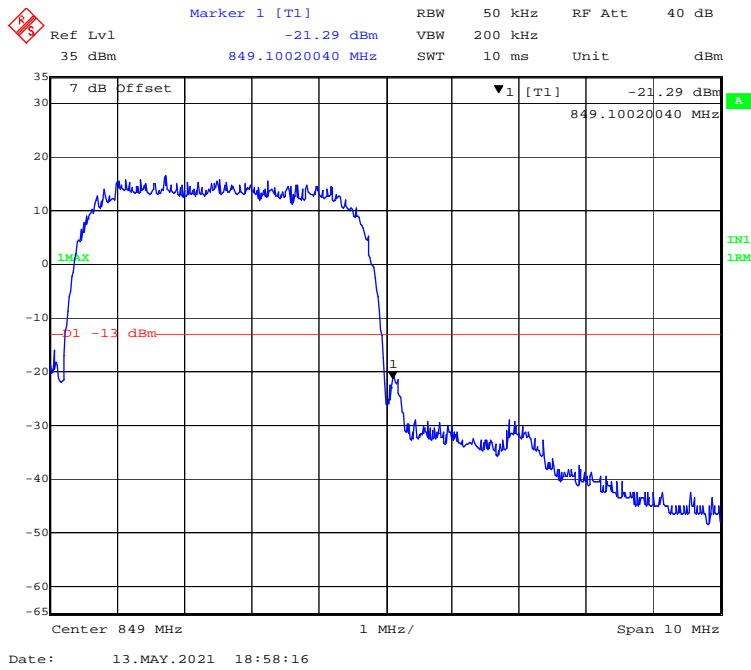


WCDMA (HSUPA) Mode, Left Band Edge

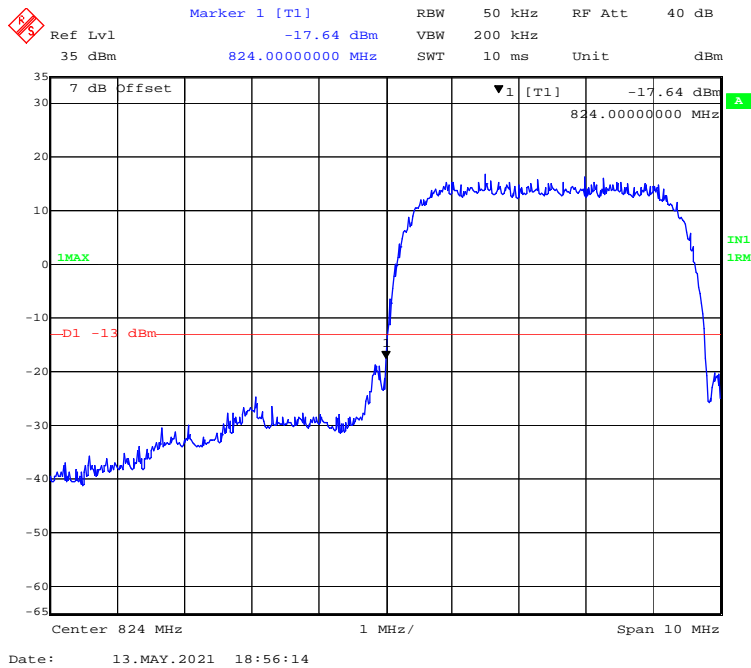


WCDMA (HSUPA) Mode, Right Band Edge



WCDMA (HSPA+) Mode, Left Band Edge

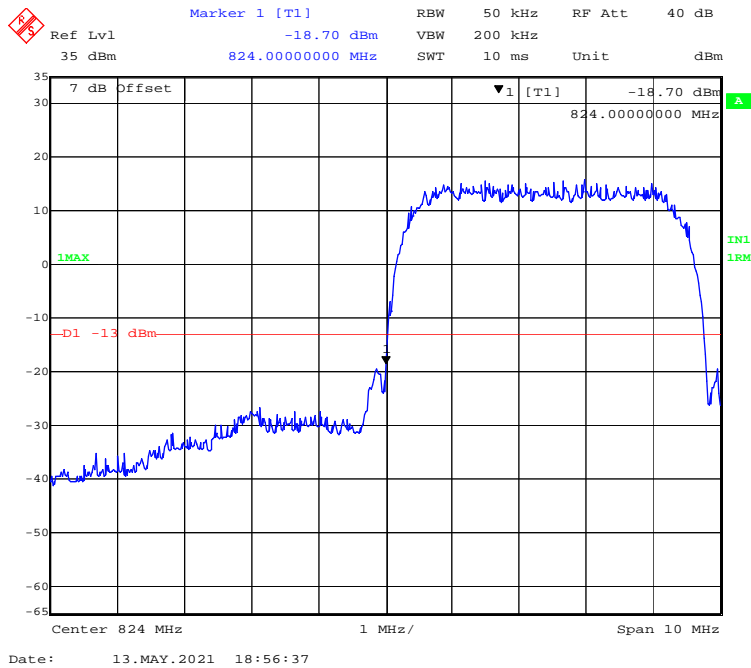


WCDMA (HSPA+) Mode, Right Band Edge

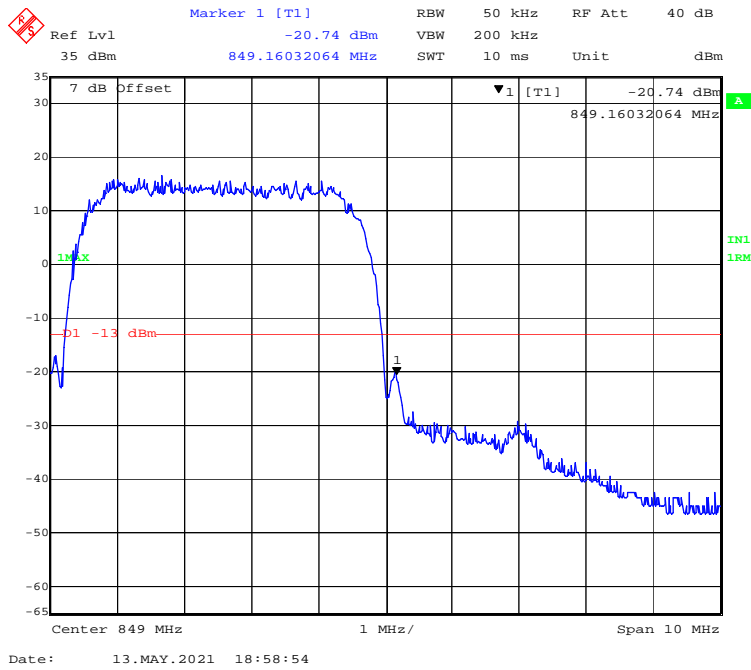


PCS 1900 Band:


GPRS Mode, Left Band Edge

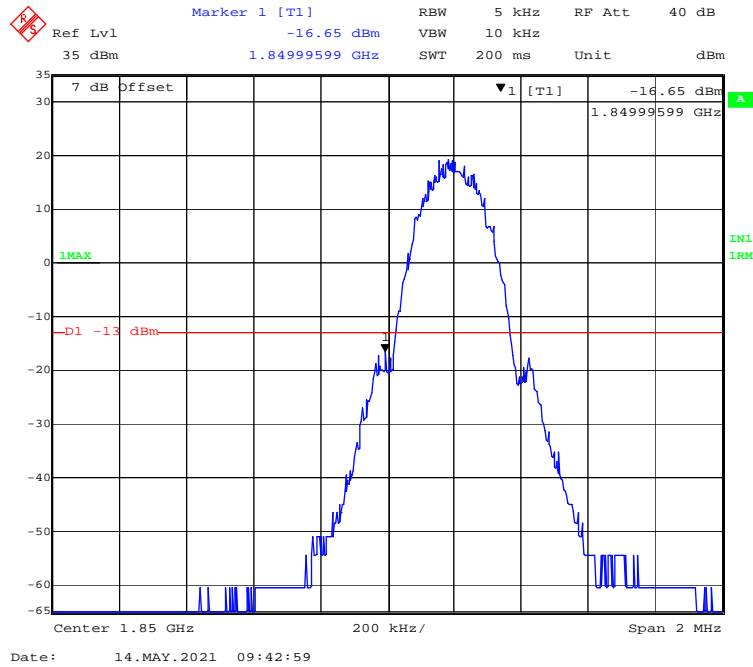


GPRS Mode, Right Band Edge

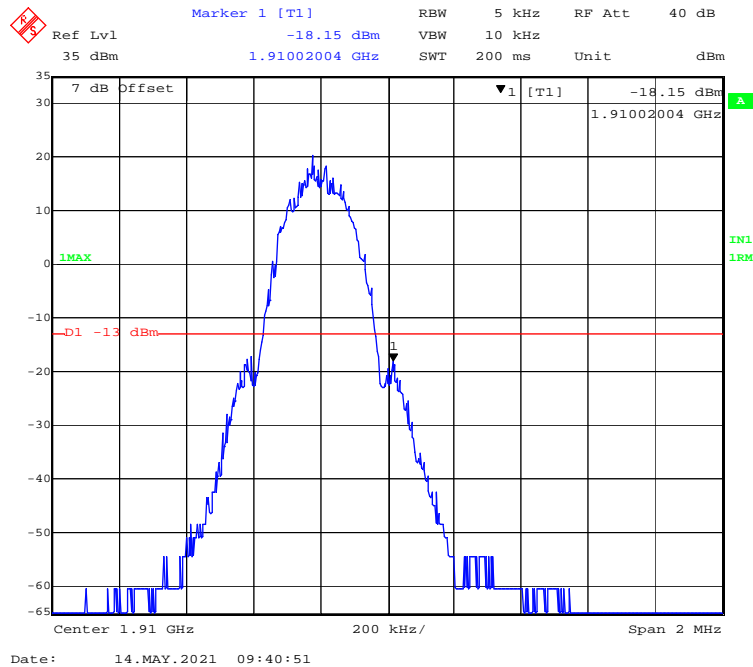

EGPRS Mode, Left Band Edge

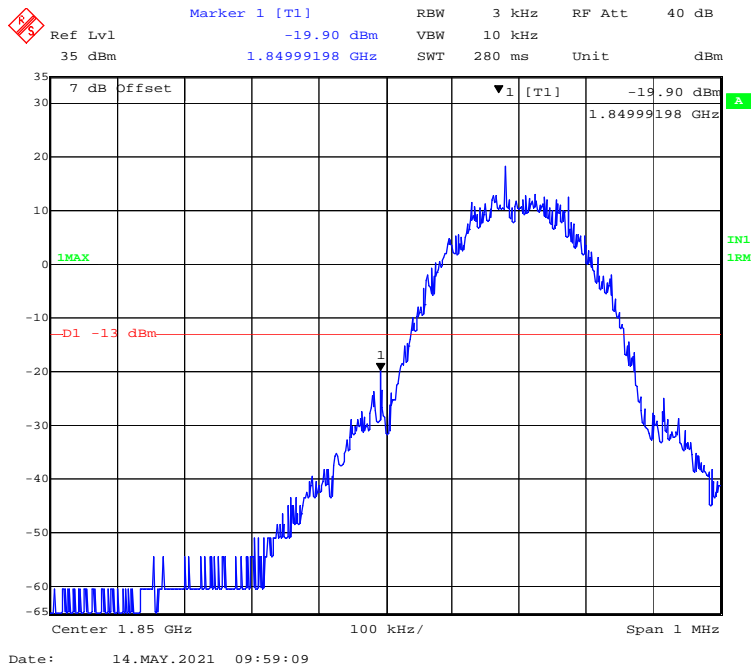


EGPRS Mode, Right Band Edge

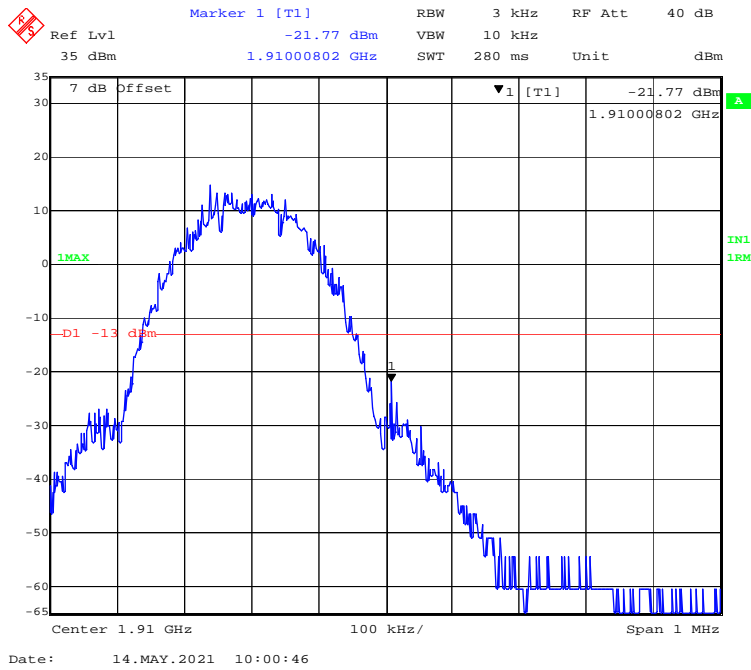


WCDMA Band II


WCDMA (Rel 99) Mode, Left Band Edge

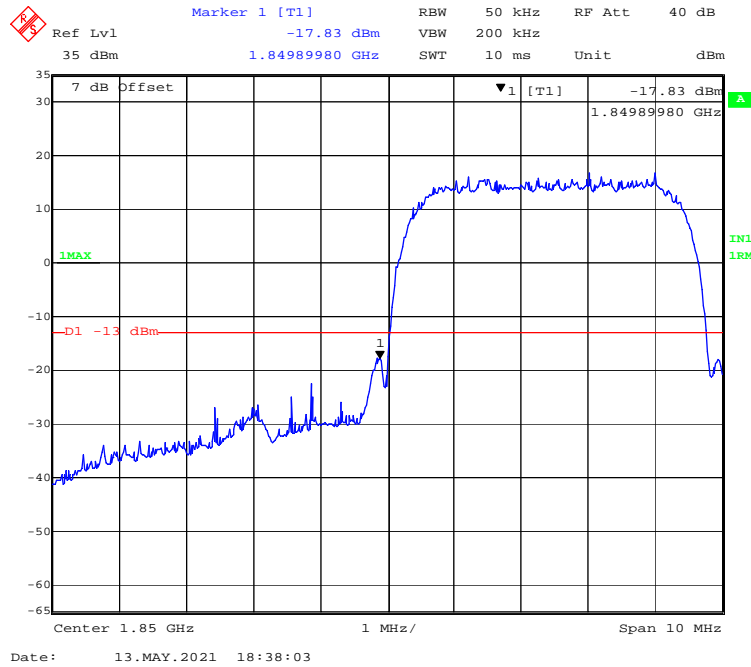


WCDMA (Rel 99) Mode, Right Band Edge

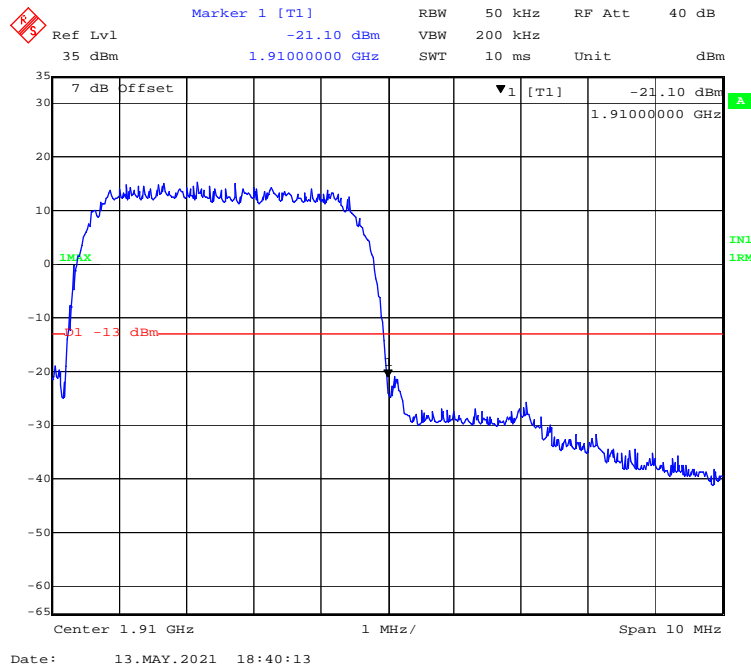


WCDMA (HSDPA) Mode, Left Band Edge

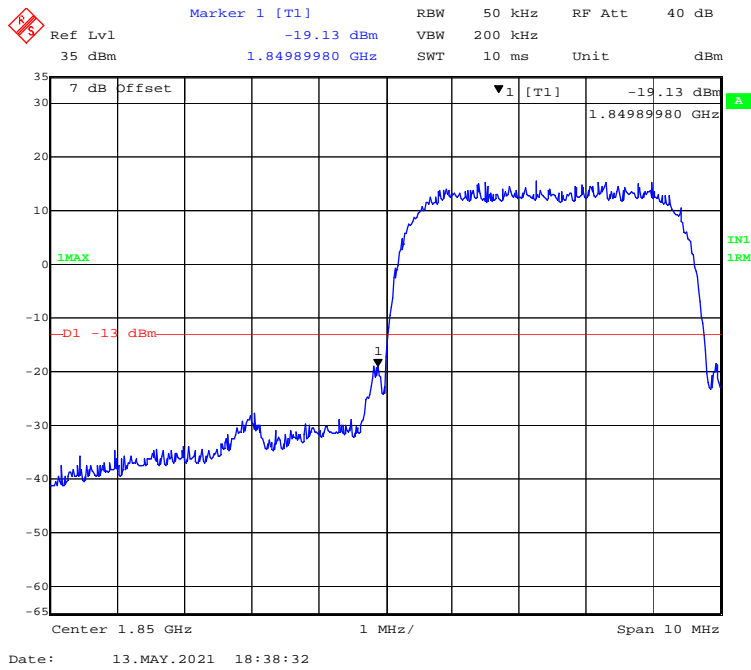


WCDMA (HSDPA) Mode, Right Band Edge

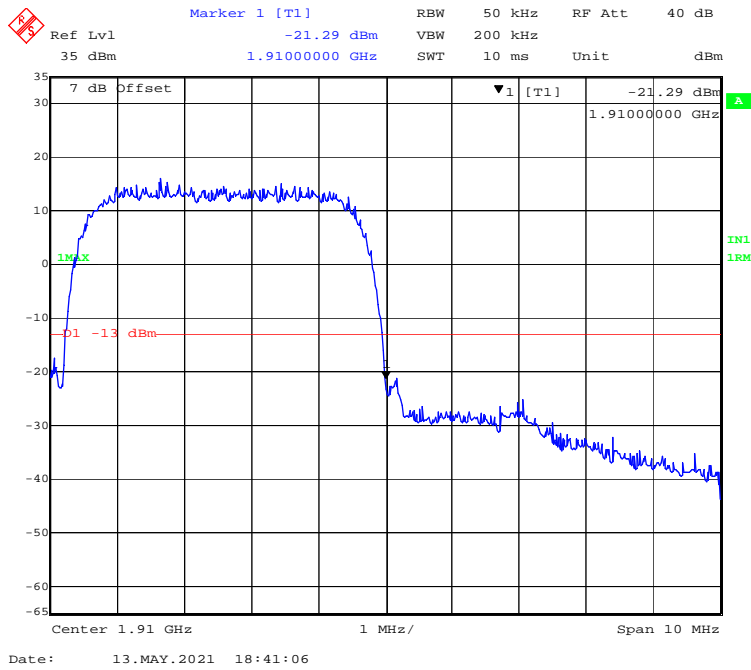


WCDMA (HSUPA) Mode, Left Band Edge

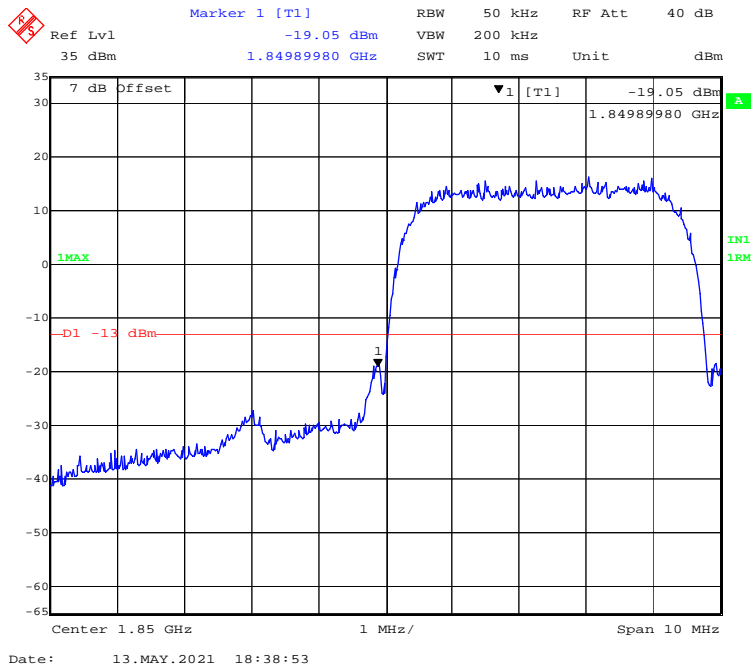


WCDMA (HSUPA) Mode, Right Band Edge

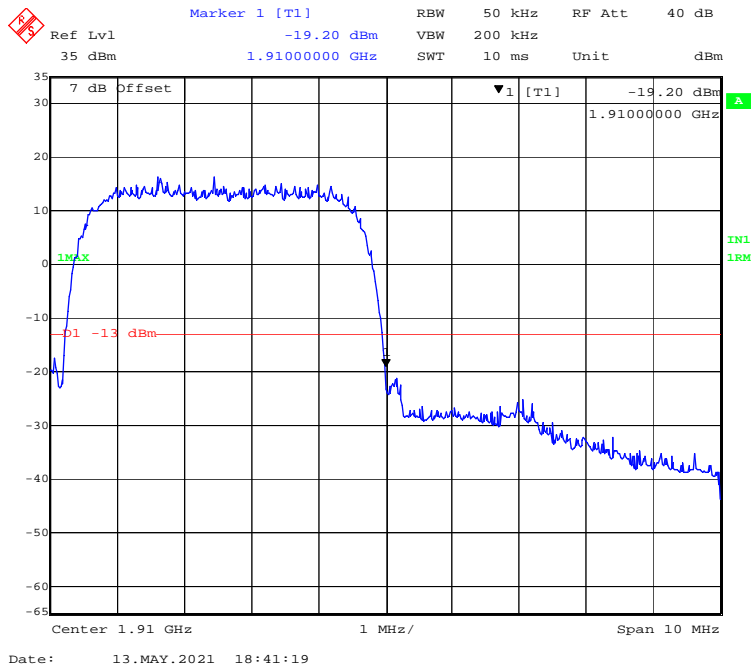

WCDMA (HSPA+) Mode, Left Band Edge

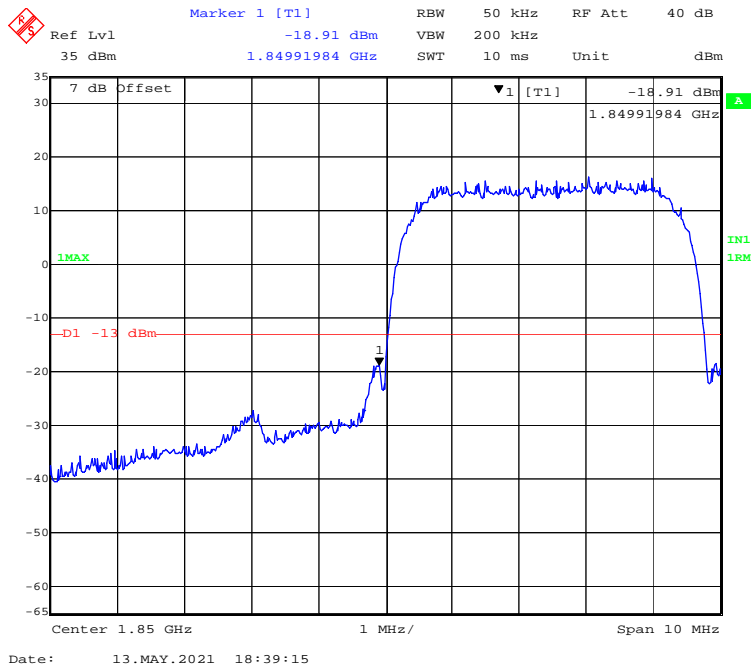


WCDMA (HSPA+) Mode, Right Band Edge

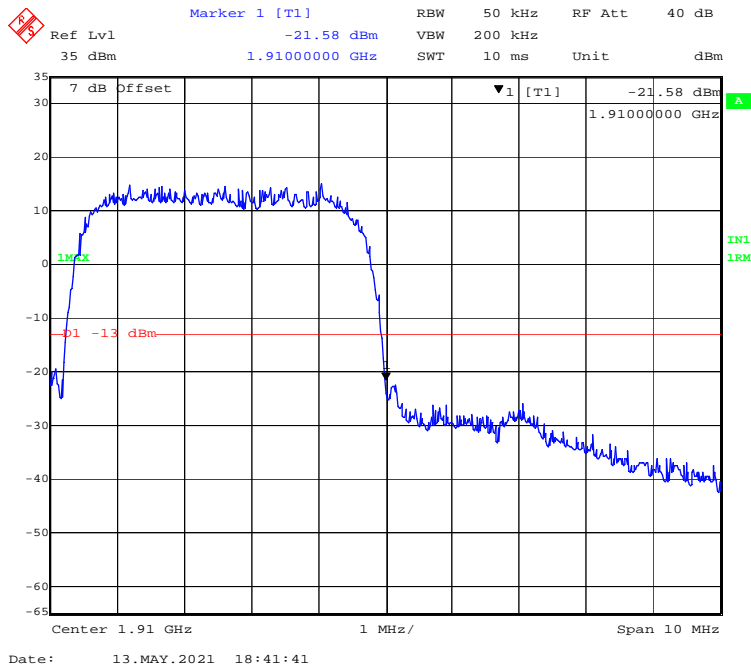


WCDMA Band IV


WCDMA (Rel 99) Mode, Left Band Edge

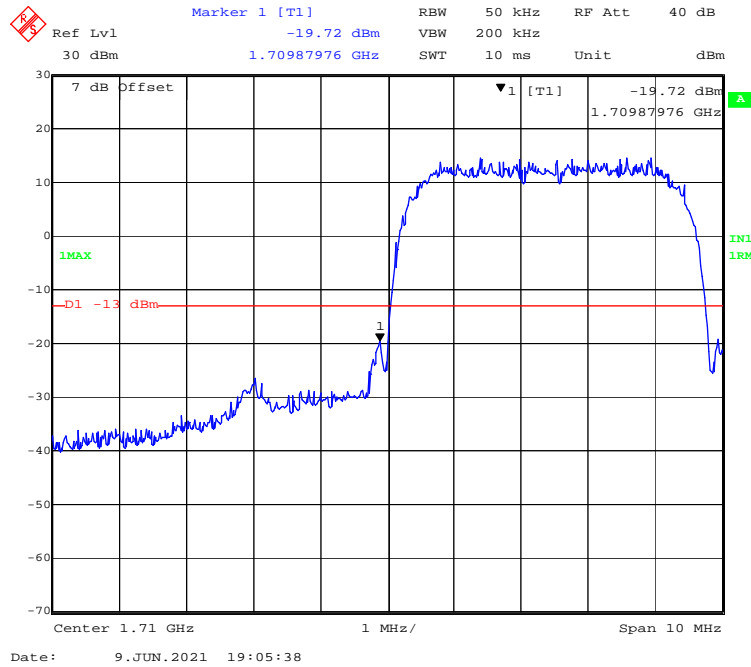


WCDMA (Rel 99) Mode, Right Band Edge

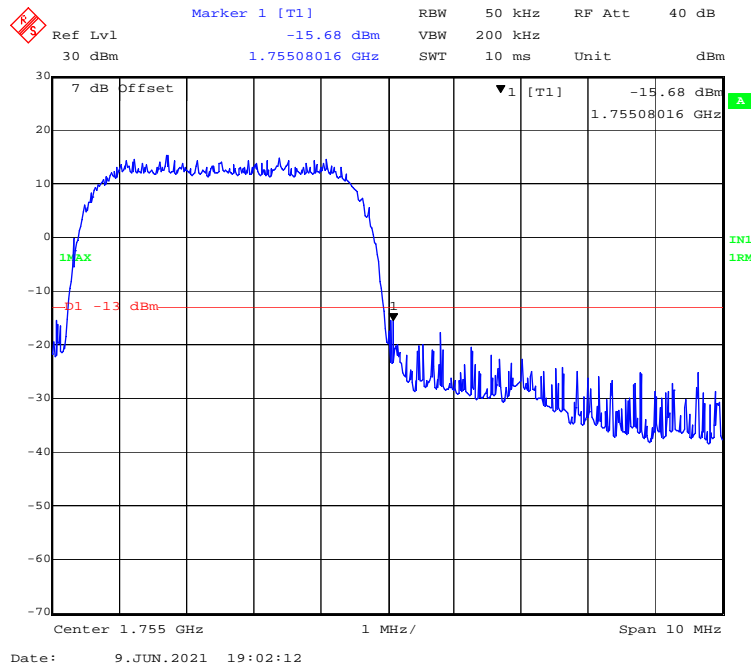


WCDMA (HSDPA) Mode, Left Band Edge

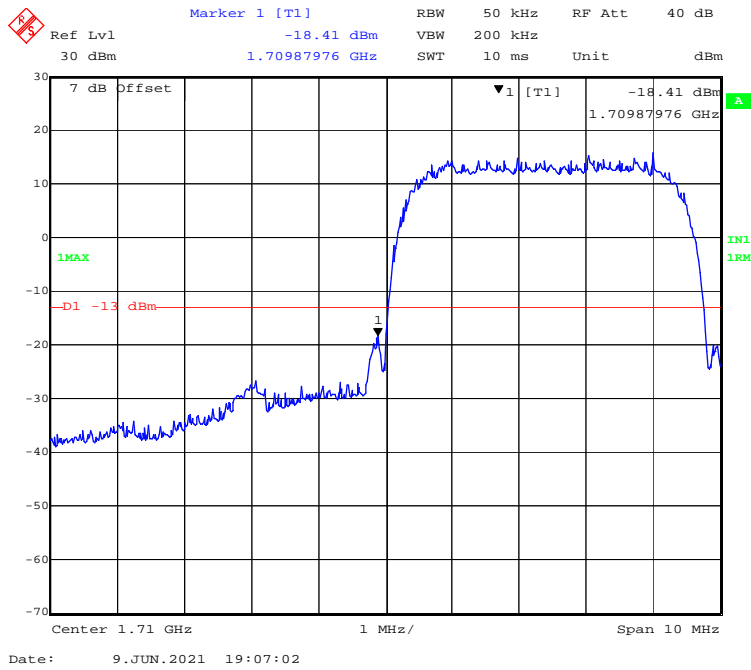


WCDMA (HSDPA) Mode, Right Band Edge

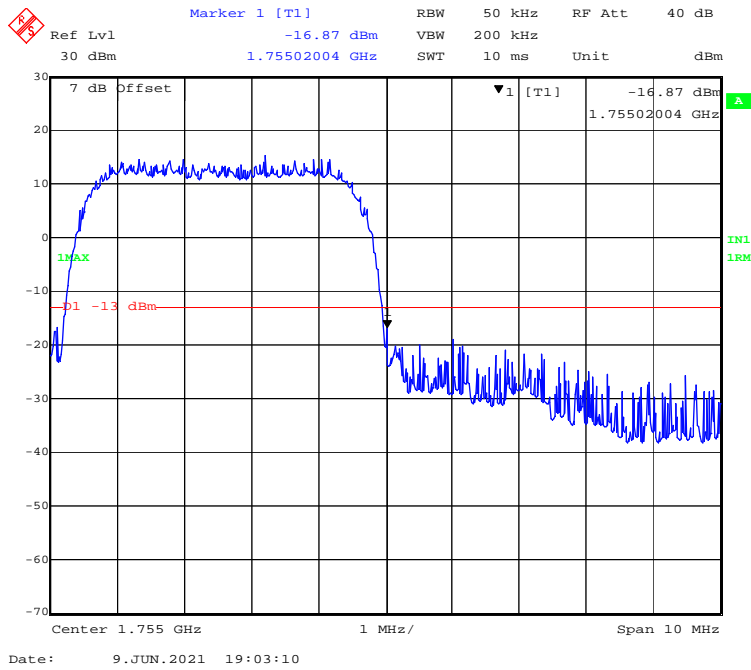


WCDMA (HSUPA) Mode, Left Band Edge

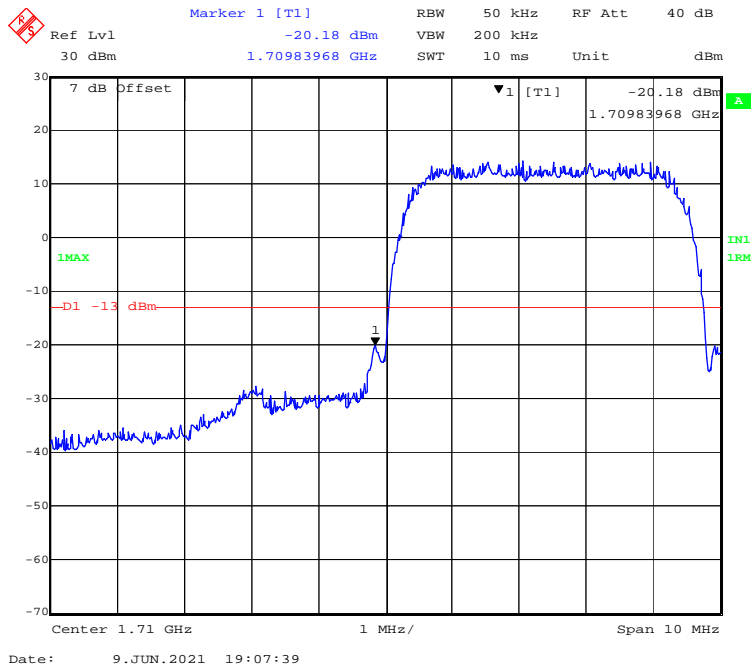


WCDMA (HSUPA) Mode, Right Band Edge

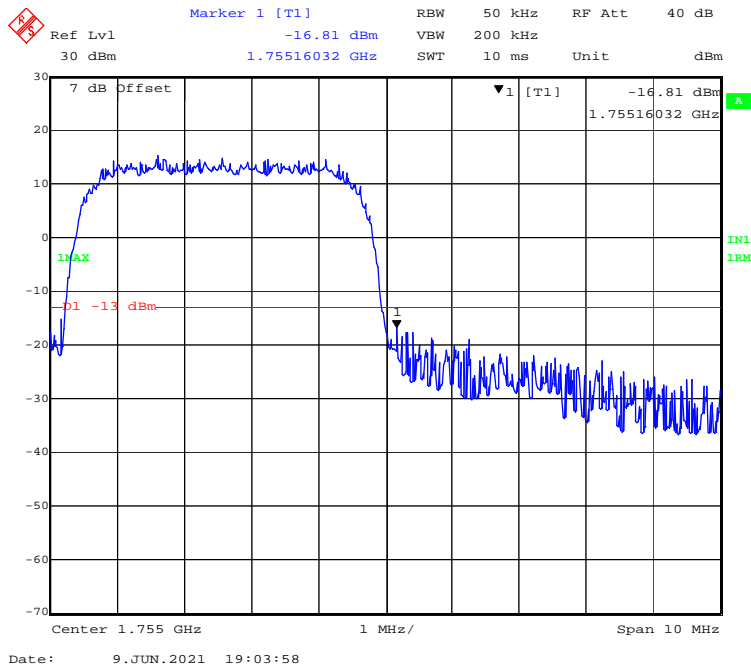

WCDMA (HSPA+) Mode, Left Band Edge

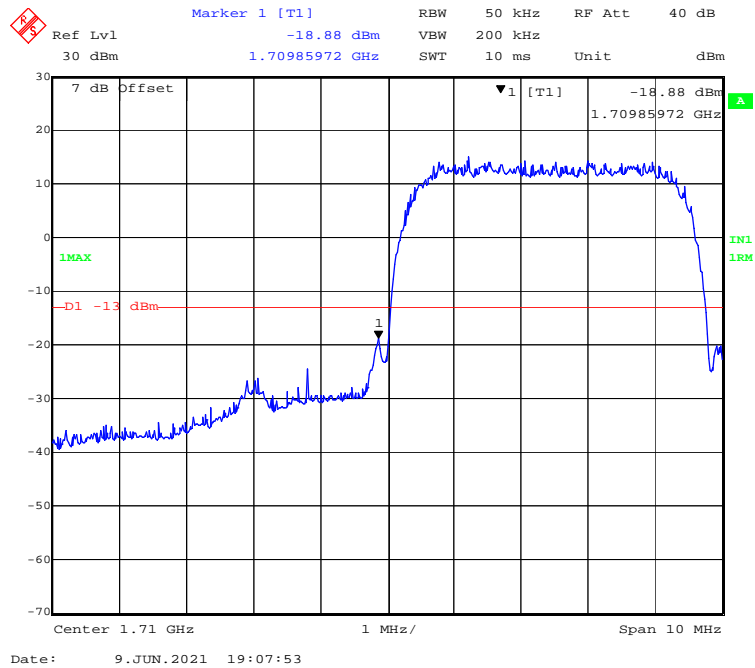


WCDMA (HSPA+) Mode, Right Band Edge

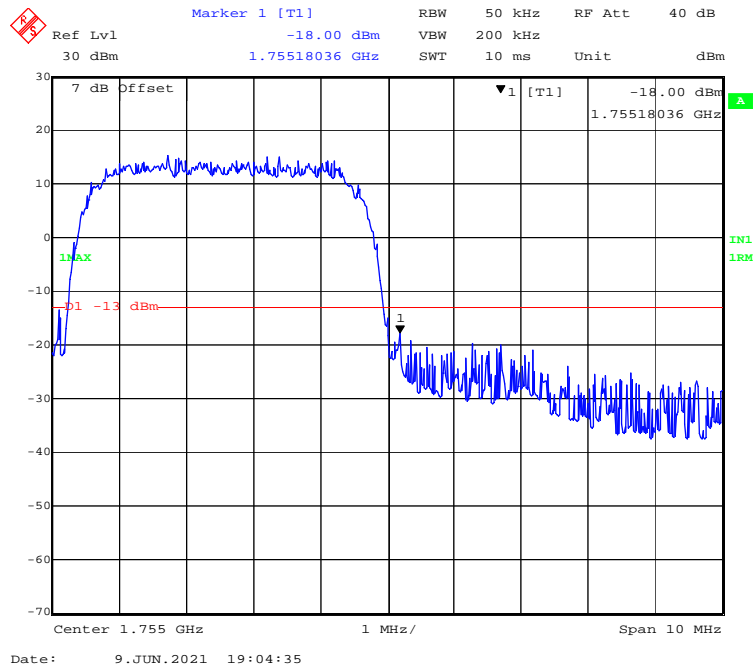


LTE Band 2:


QPSK (1.4 MHz, FULL RB) - Left Band Edge

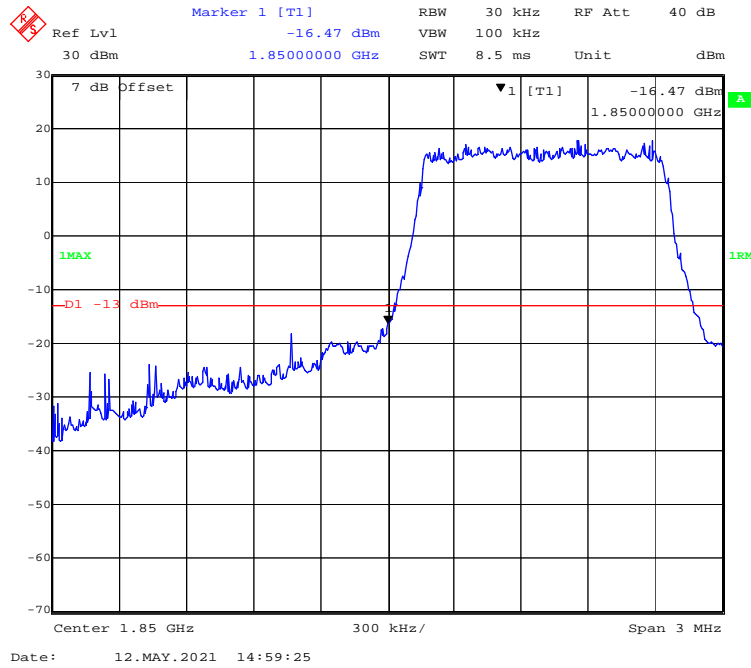


QPSK (1.4 MHz, FULL RB) - Right Band Edge

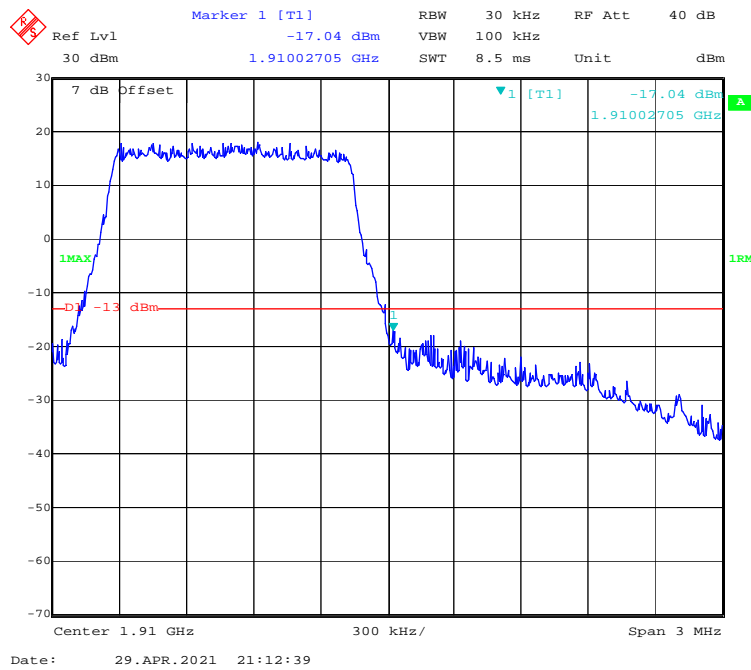


QPSK (3 MHz, FULL RB) - Left Band Edge

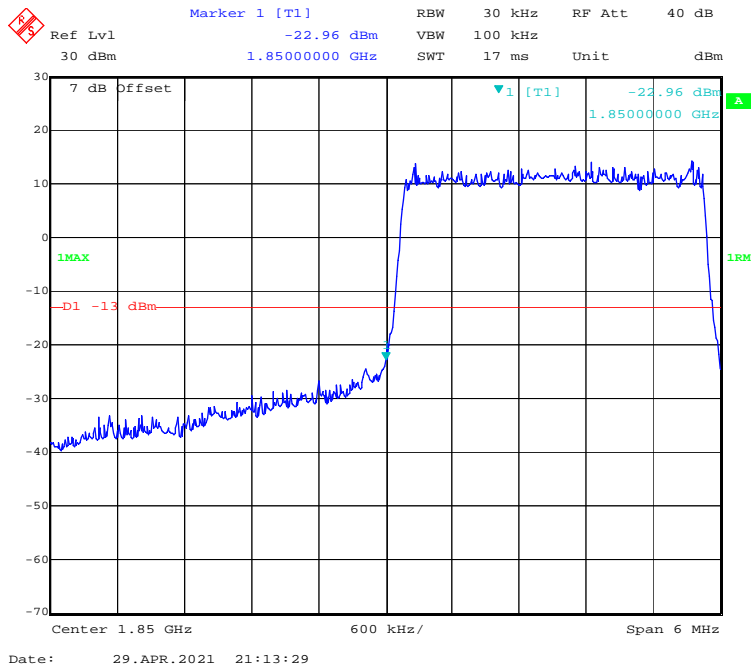


QPSK (3 MHz, FULL RB) - Right Band Edge

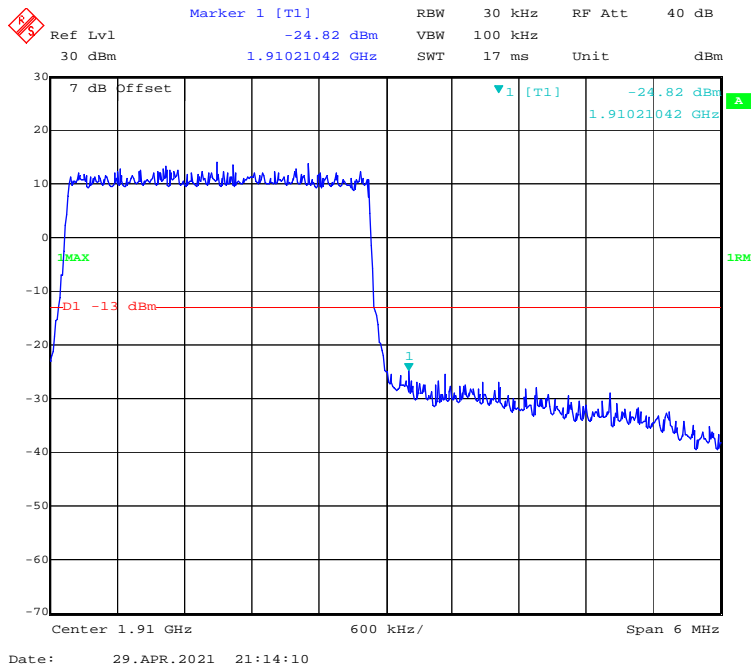


QPSK (5 MHz, FULL RB) - Left Band Edge

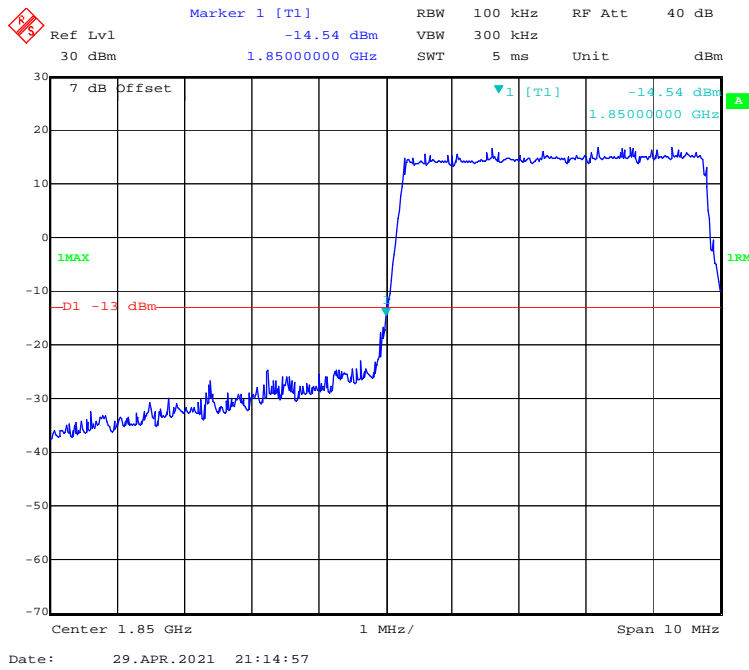


QPSK (5 MHz, FULL RB) - Right Band Edge

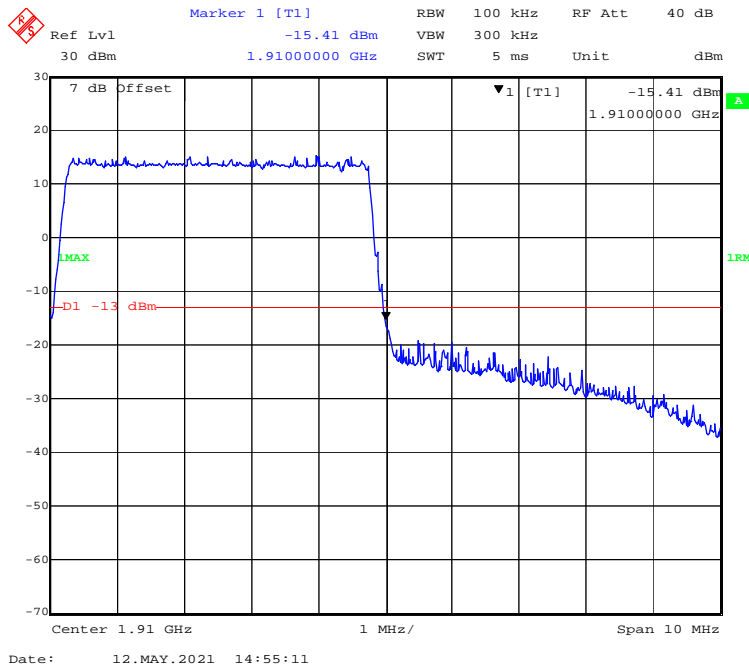


QPSK (10 MHz, FULL RB) - Left Band Edge

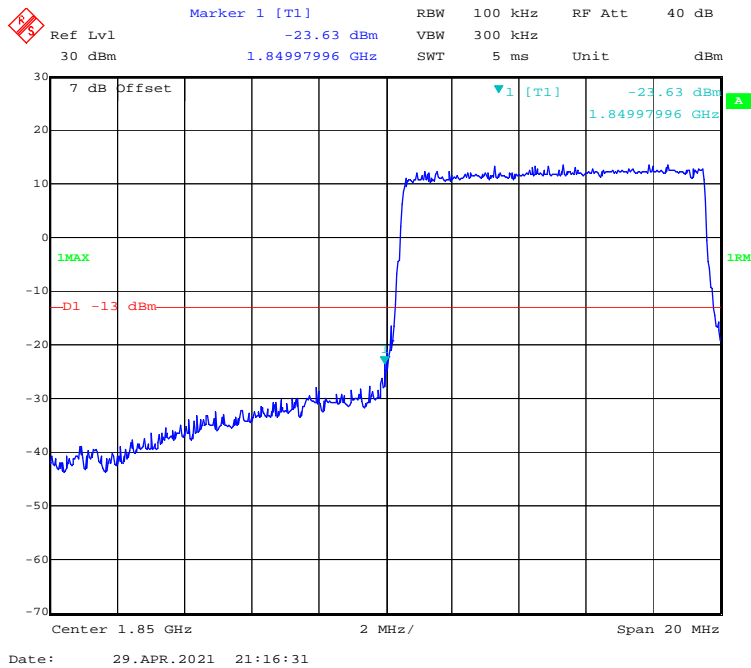


QPSK (10 MHz, FULL RB) - Right Band Edge

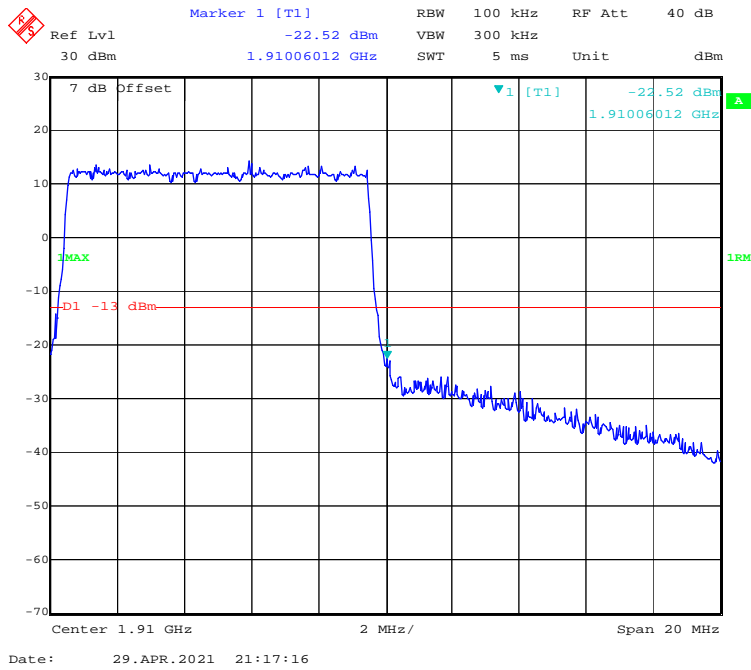


QPSK (15 MHz, FULL RB) - Left Band Edge

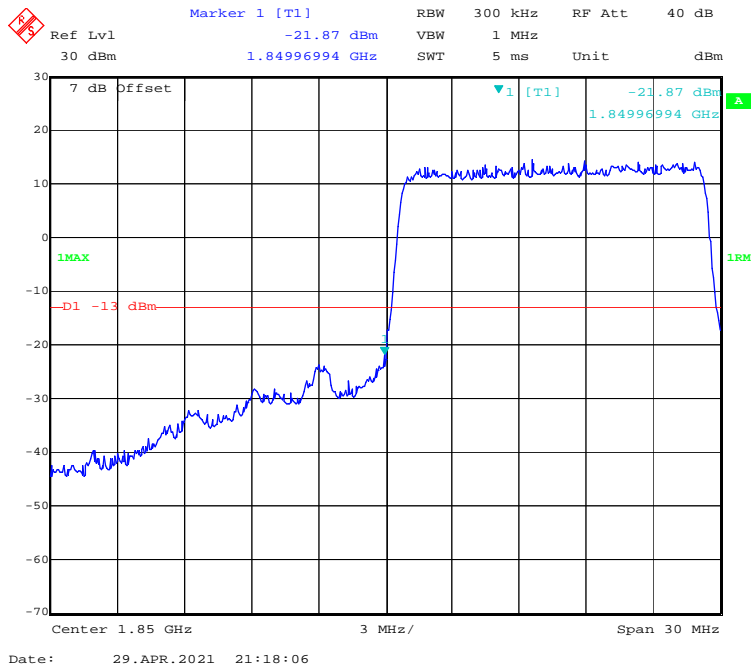


QPSK (15 MHz, FULL RB) - Right Band Edge

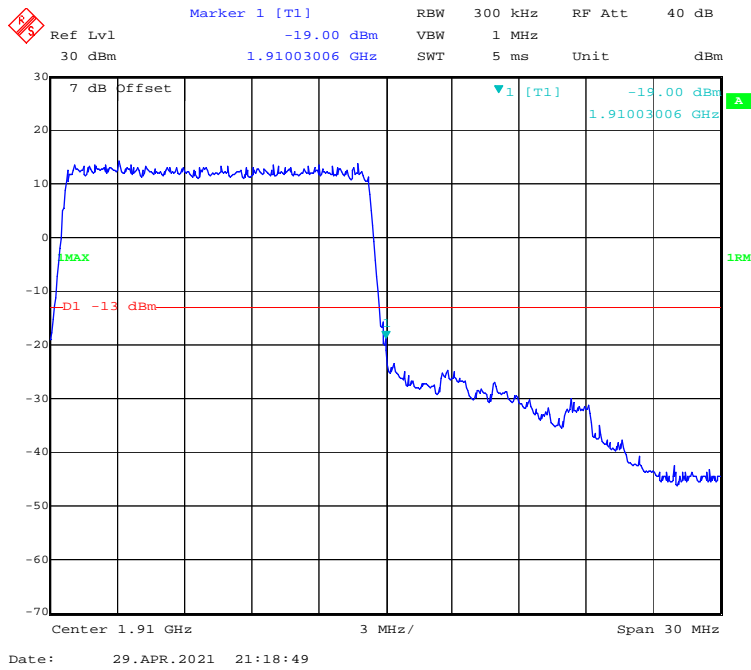


QPSK (20 MHz, FULL RB) - Left Band Edge

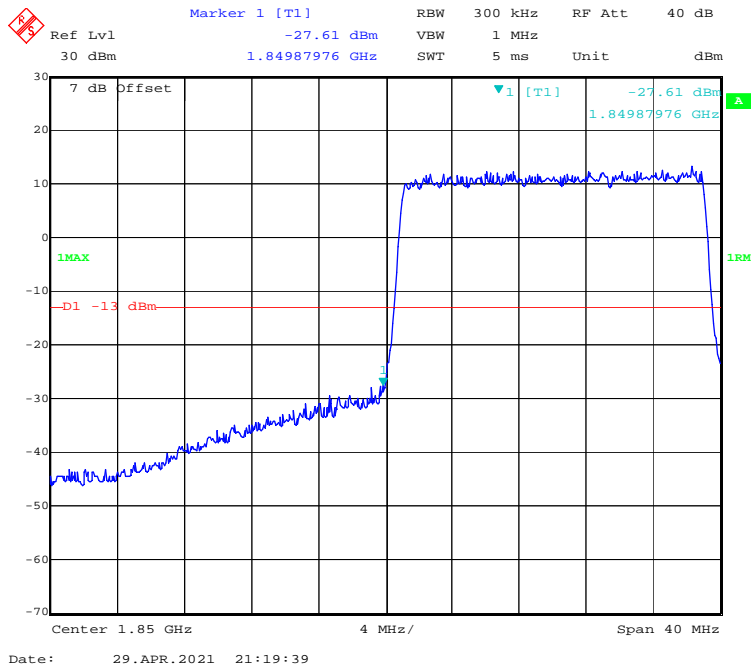


QPSK (20 MHz, FULL RB) - Right Band Edge

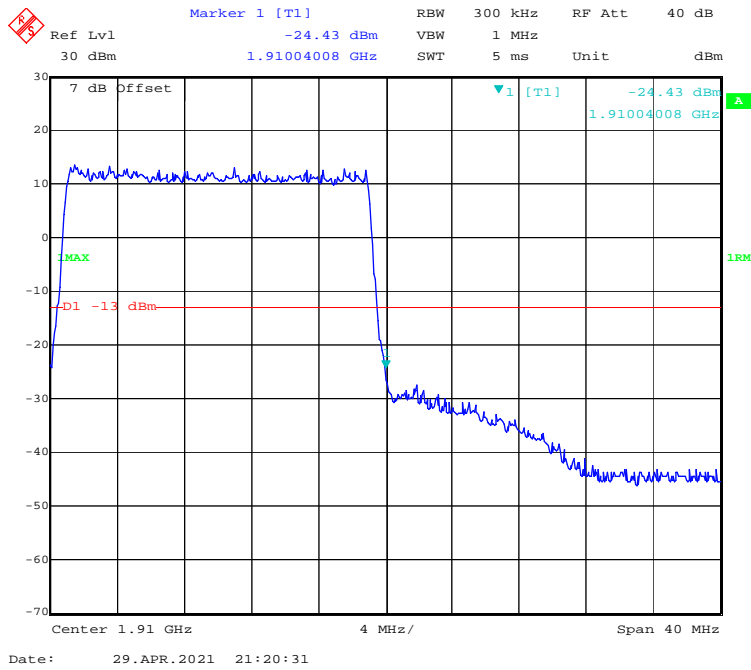


16-QAM (1.4 MHz, FULL RB) - Left Band Edge

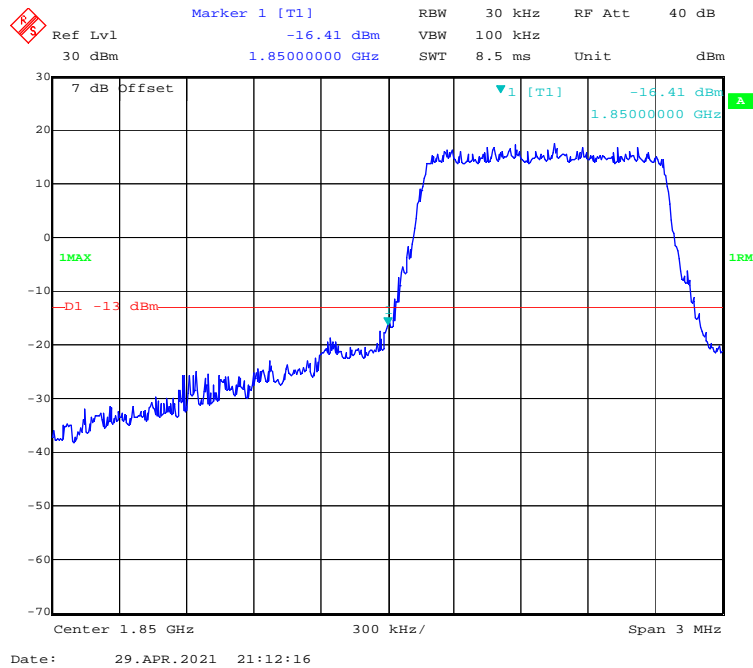

16-QAM (1.4 MHz, FULL RB) - Right Band Edge

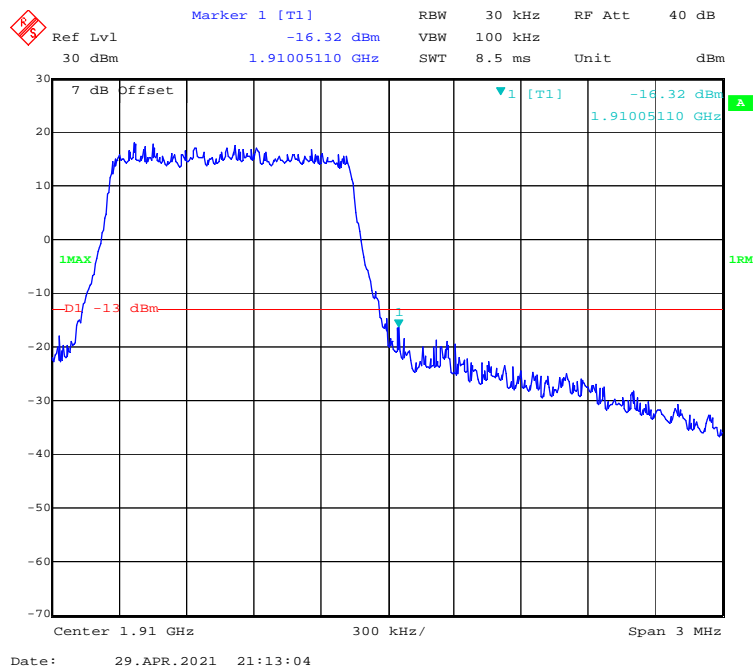


16-QAM (3 MHz, FULL RB) - Left Band Edge

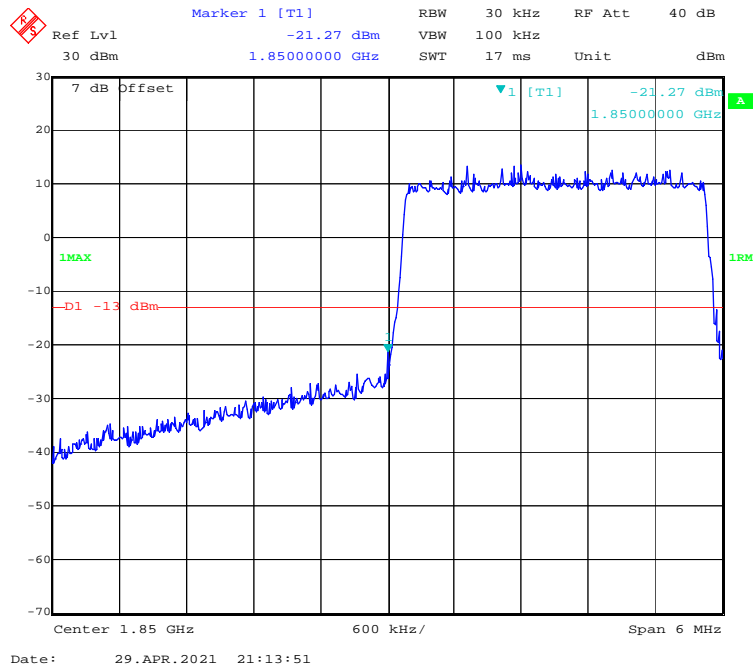


16-QAM (3 MHz, FULL RB) - Right Band Edge




16-QAM (5 MHz, FULL RB) - Left Band Edge

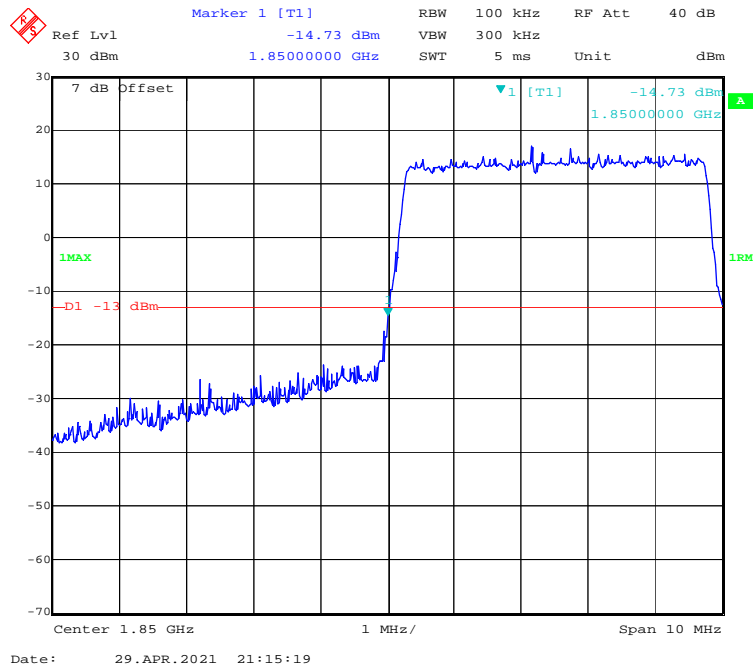


16-QAM (5 MHz, FULL RB) - Right Band Edge

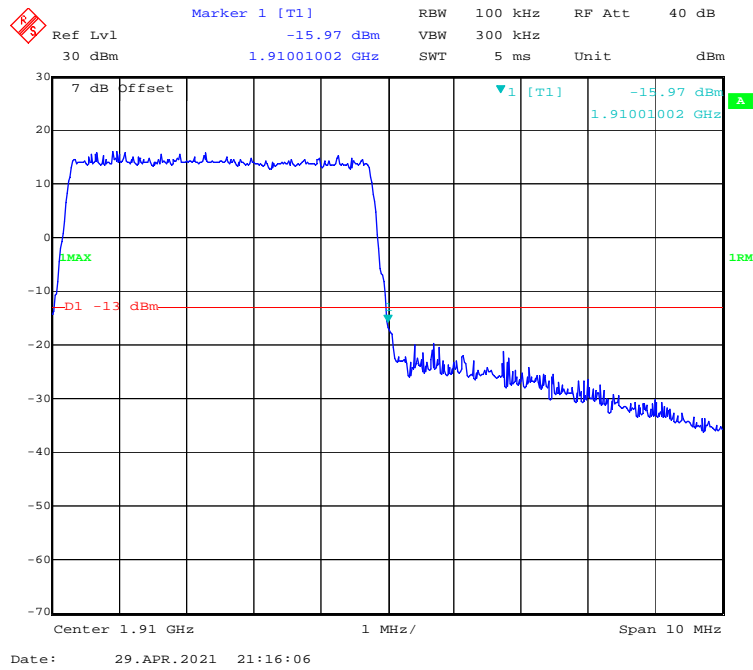


16-QAM (10 MHz, FULL RB) - Left Band Edge

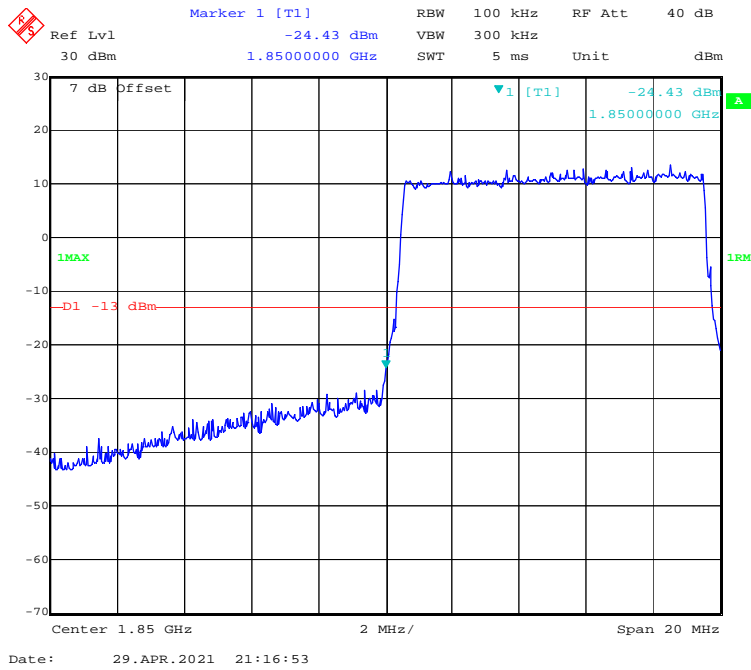


16-QAM (10 MHz, FULL RB) - Right Band Edge

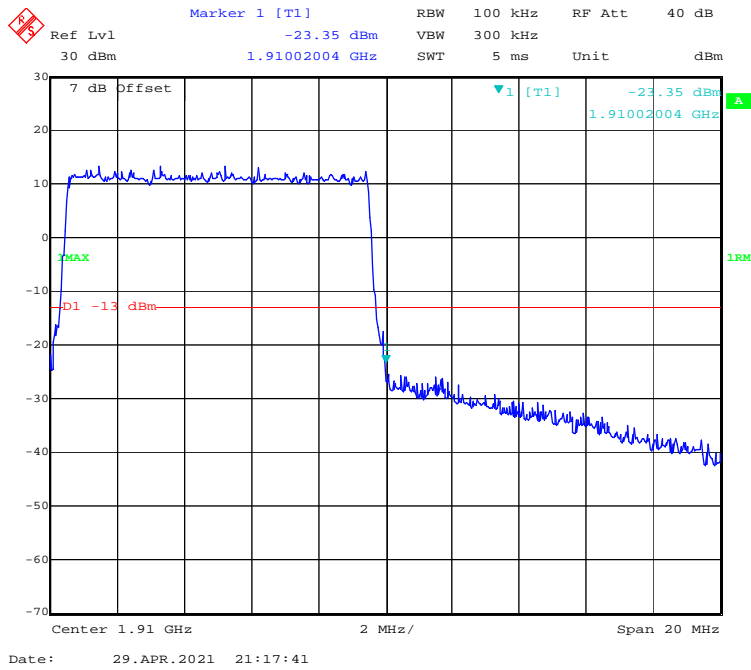


16-QAM (15 MHz, FULL RB) - Left Band Edge

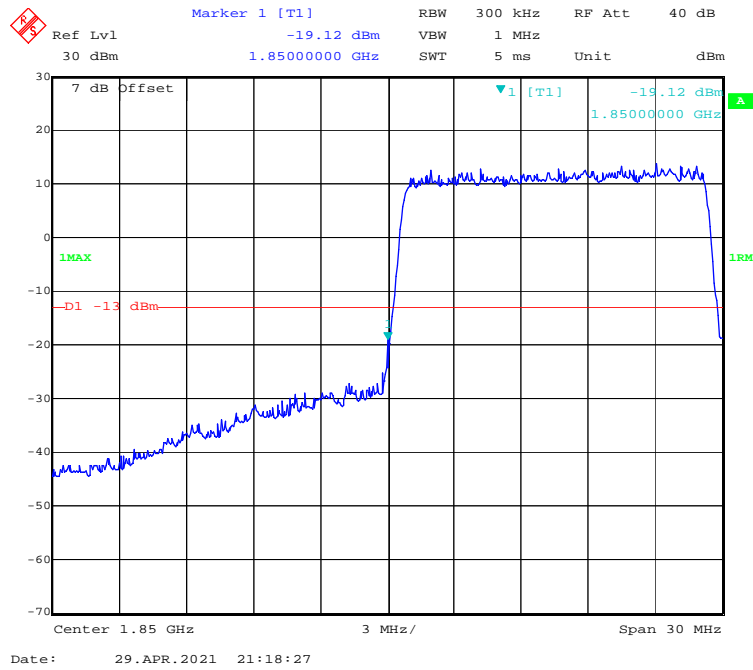


16-QAM (15 MHz, FULL RB) - Right Band Edge

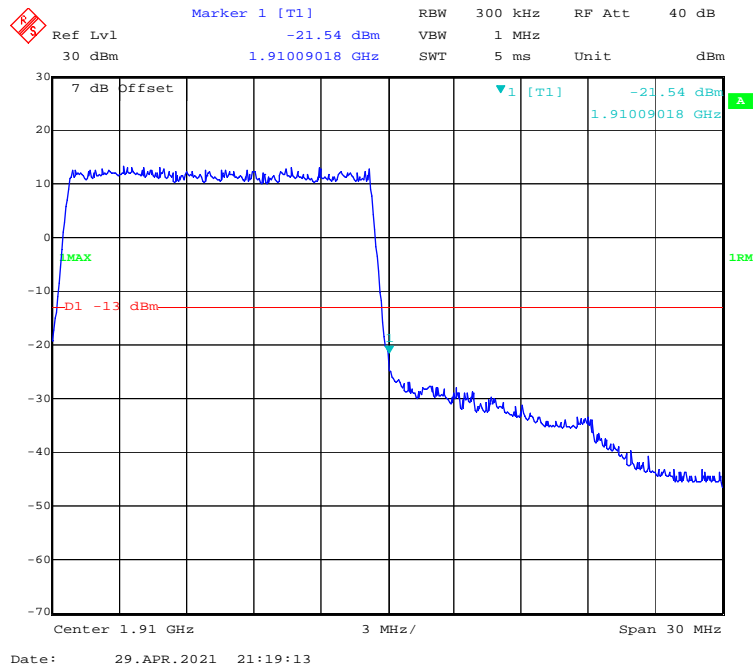

16-QAM (20 MHz, FULL RB) - Left Band Edge

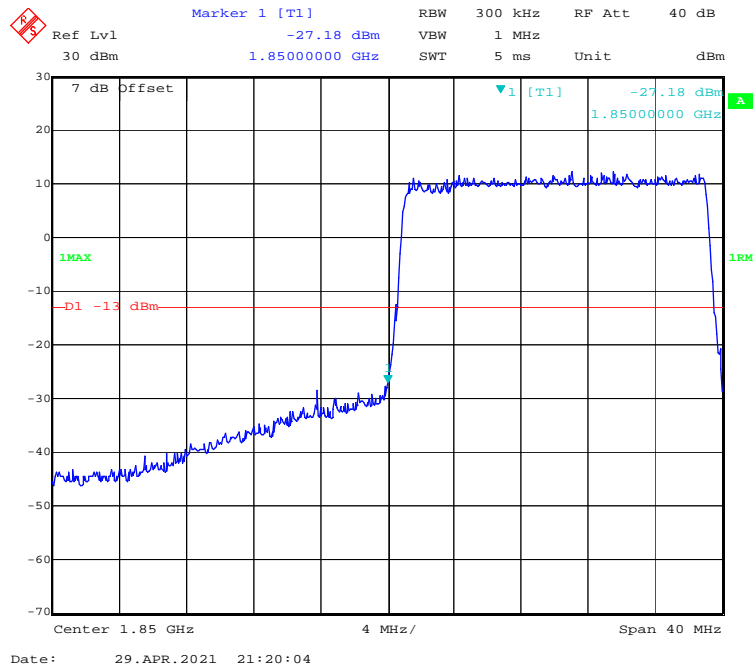


16-QAM (20 MHz, FULL RB) - Right Band Edge

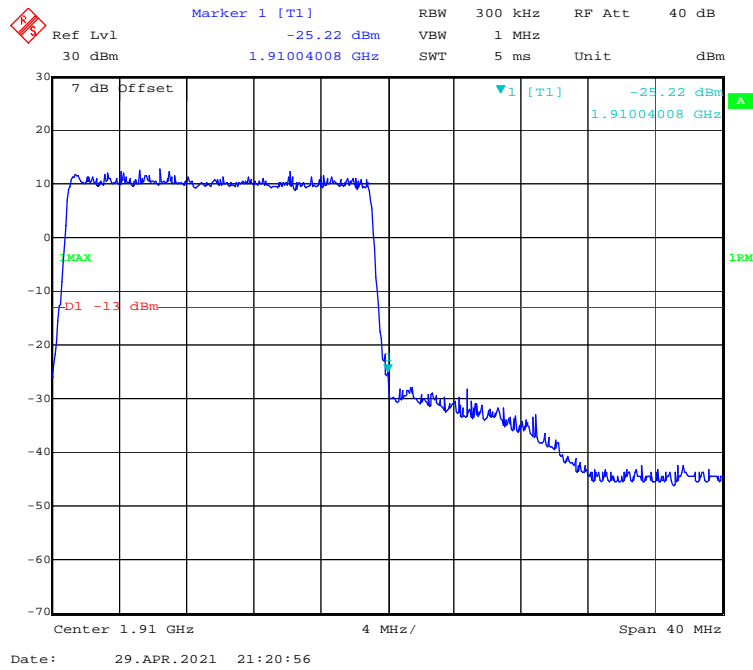


LTE Band 4:


QPSK (1.4 MHz, FULL RB) - Left Band Edge

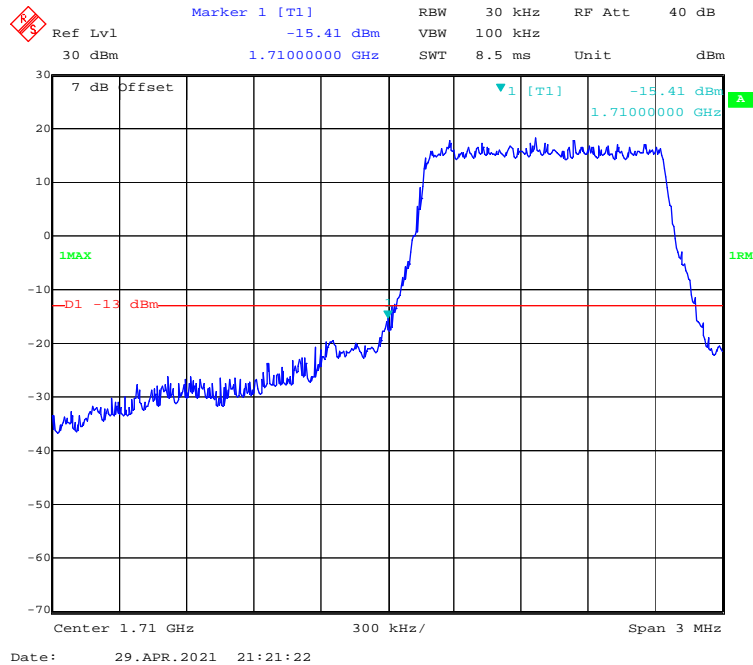


QPSK (1.4 MHz, FULL RB) - Right Band Edge

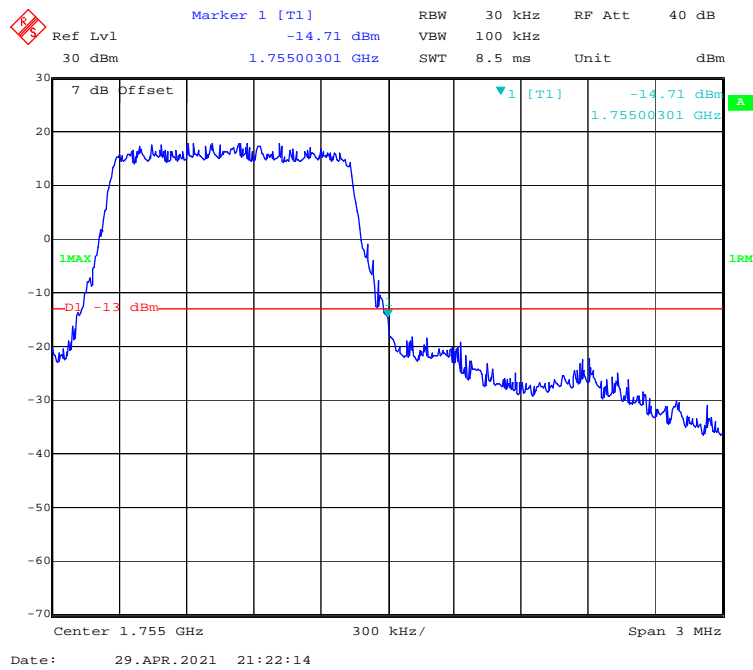


QPSK (3 MHz, FULL RB) - Left Band Edge

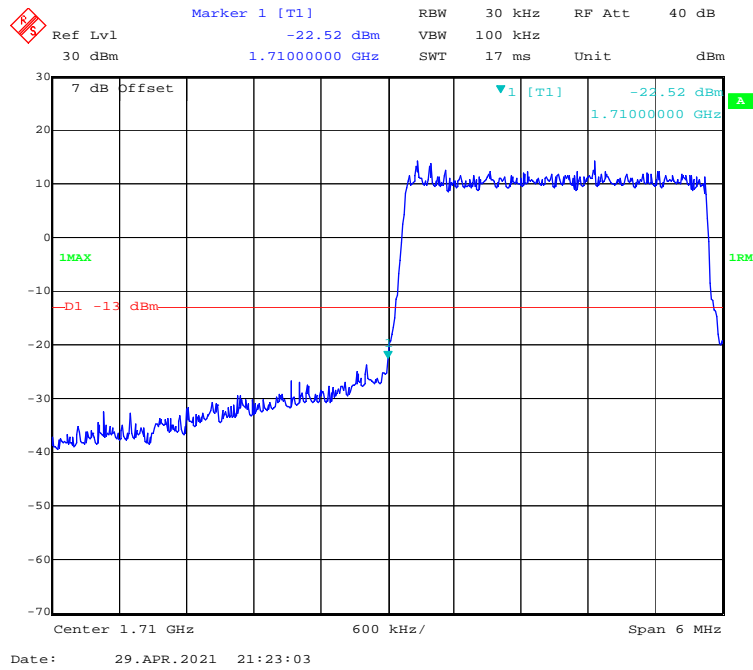


QPSK (3 MHz, FULL RB) - Right Band Edge

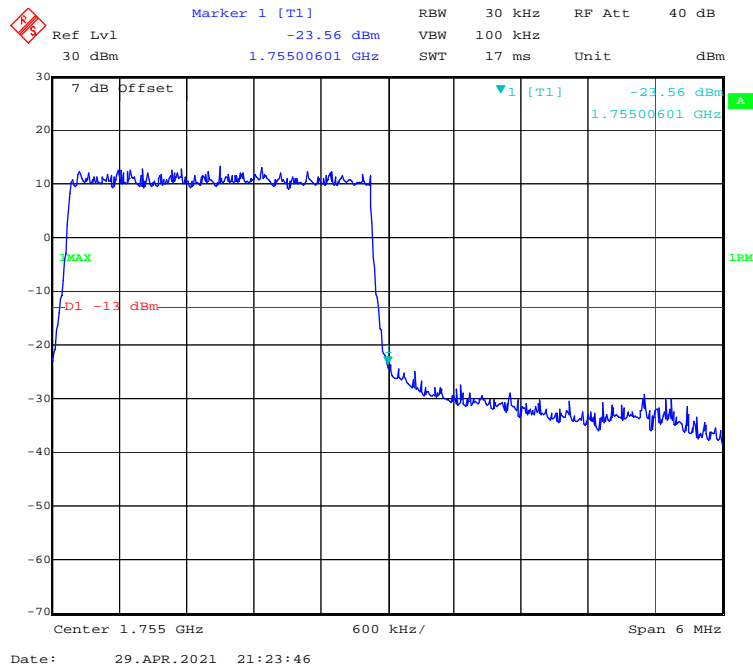


QPSK (5 MHz, FULL RB) - Left Band Edge

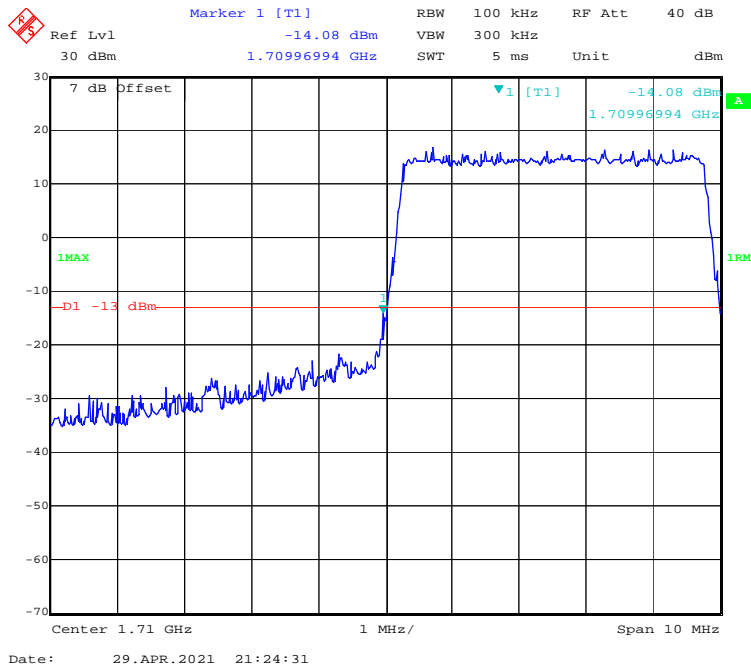


QPSK (5 MHz, FULL RB) - Right Band Edge

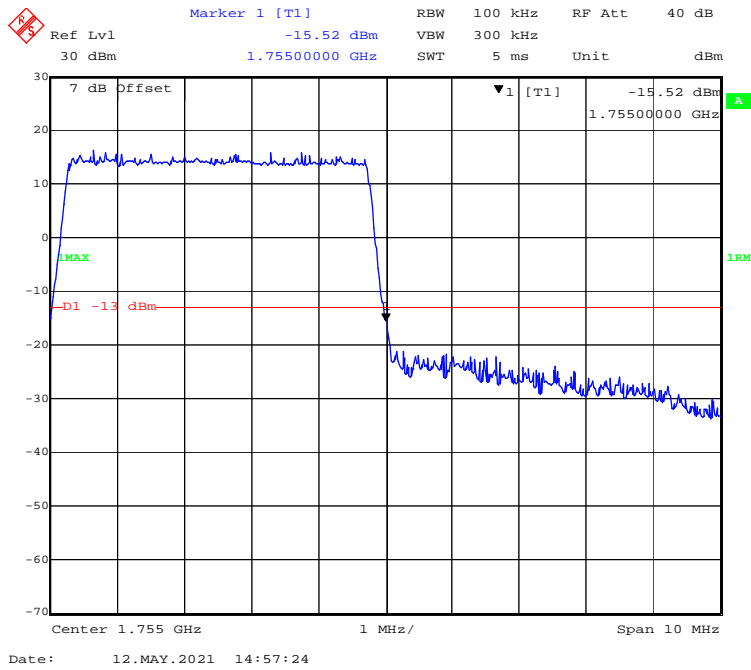


QPSK (10 MHz, FULL RB) - Left Band Edge

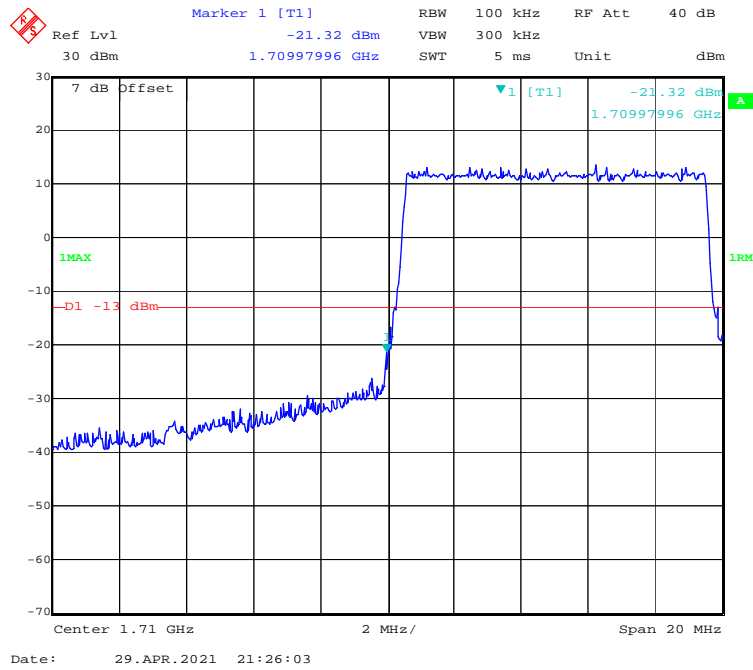


QPSK (10 MHz, FULL RB) - Right Band Edge

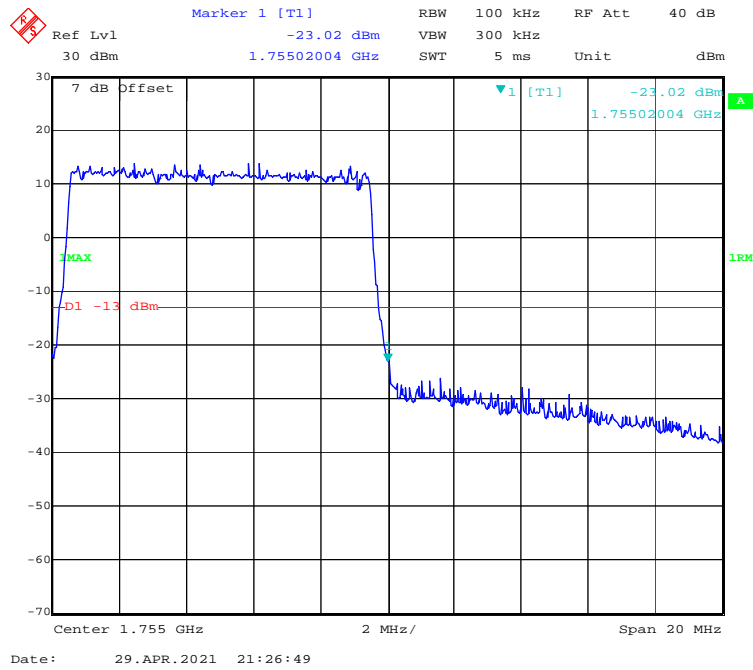


QPSK (15 MHz, FULL RB) - Left Band Edge

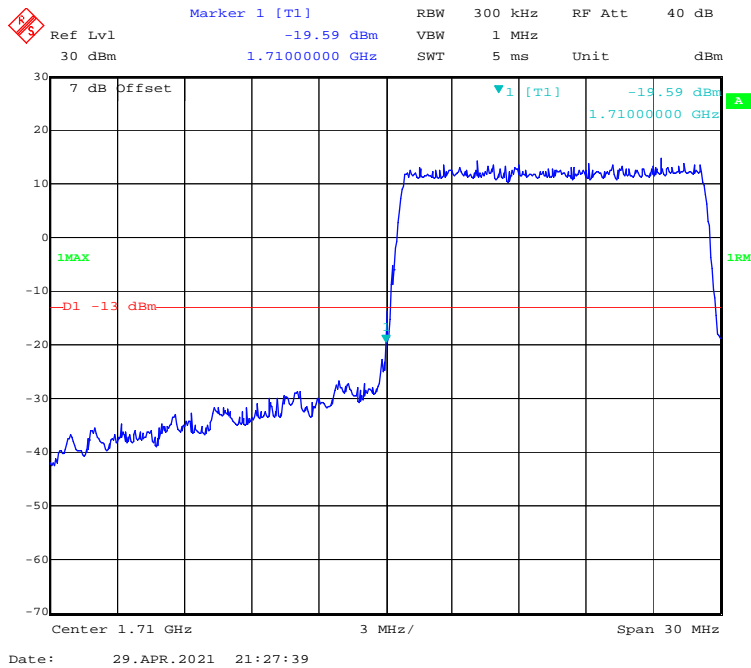


QPSK (15 MHz, FULL RB) - Right Band Edge

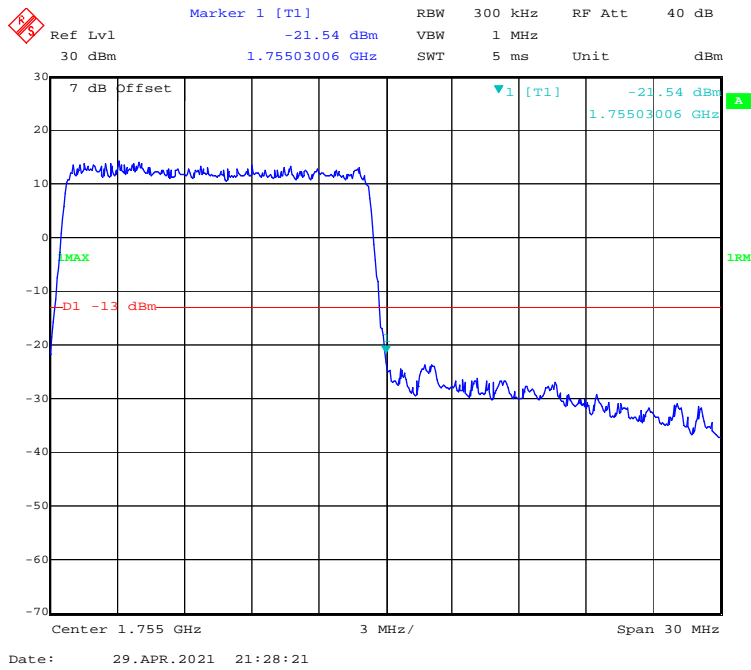


QPSK (20 MHz, FULL RB) - Left Band Edge

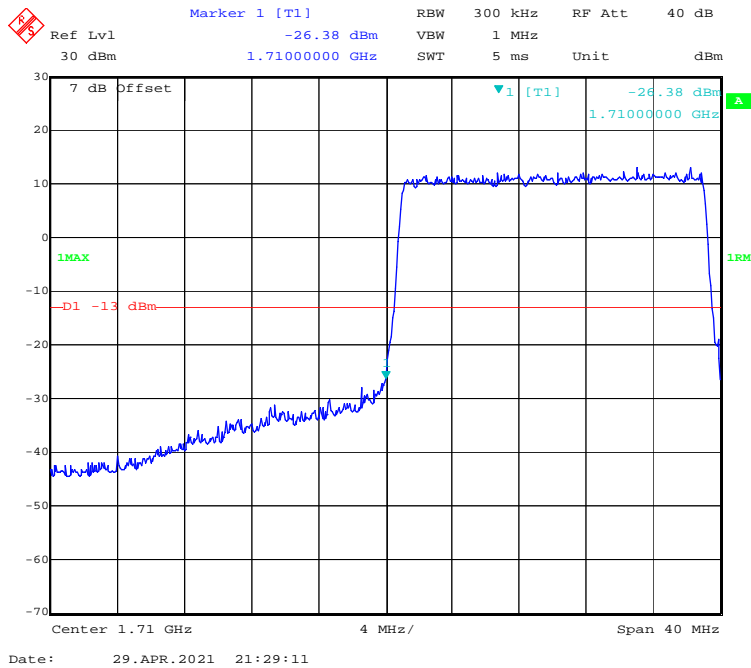


QPSK (20 MHz, FULL RB) - Right Band Edge

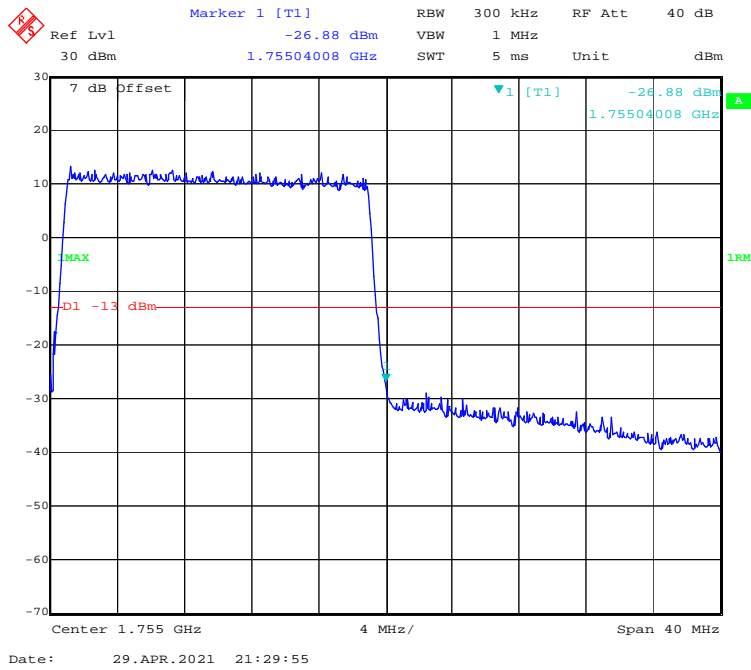


16-QAM (1.4 MHz, FULL RB) - Left Band Edge

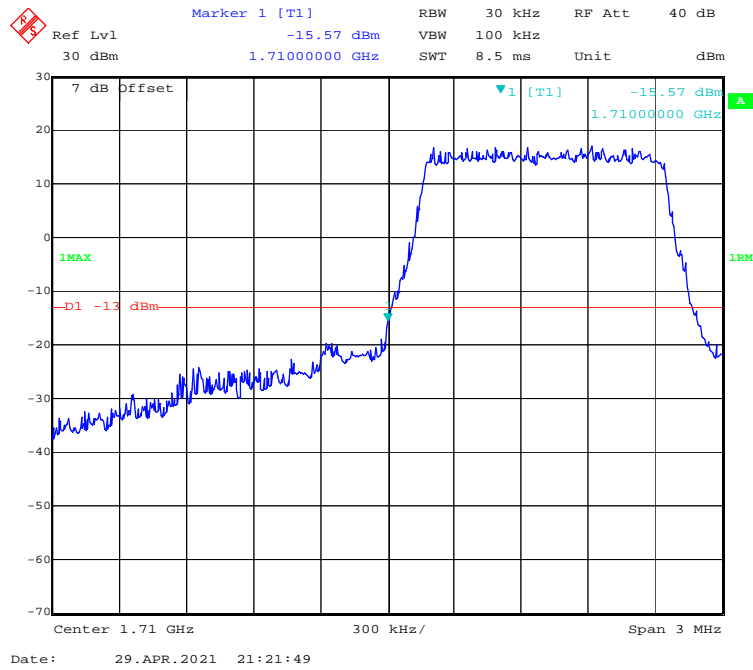


16-QAM (1.4 MHz, FULL RB) - Right Band Edge

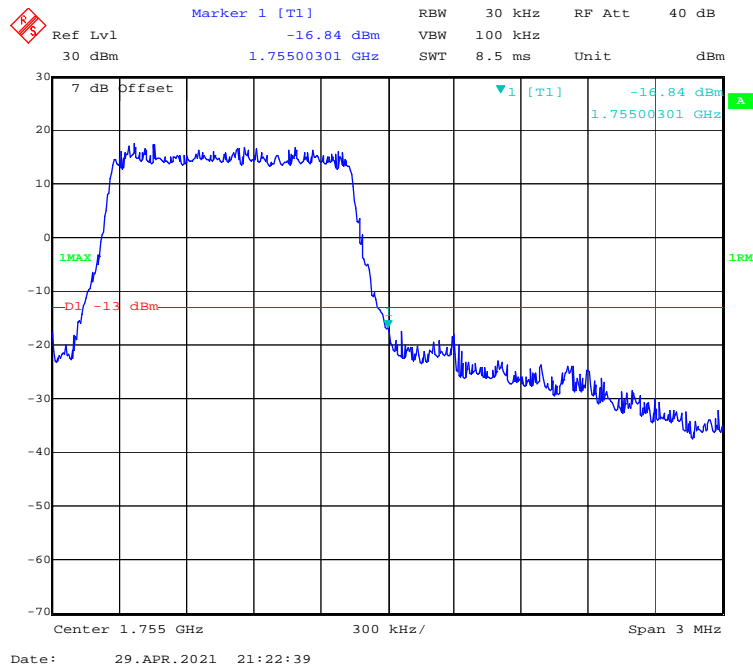


16-QAM (3 MHz, FULL RB) - Left Band Edge

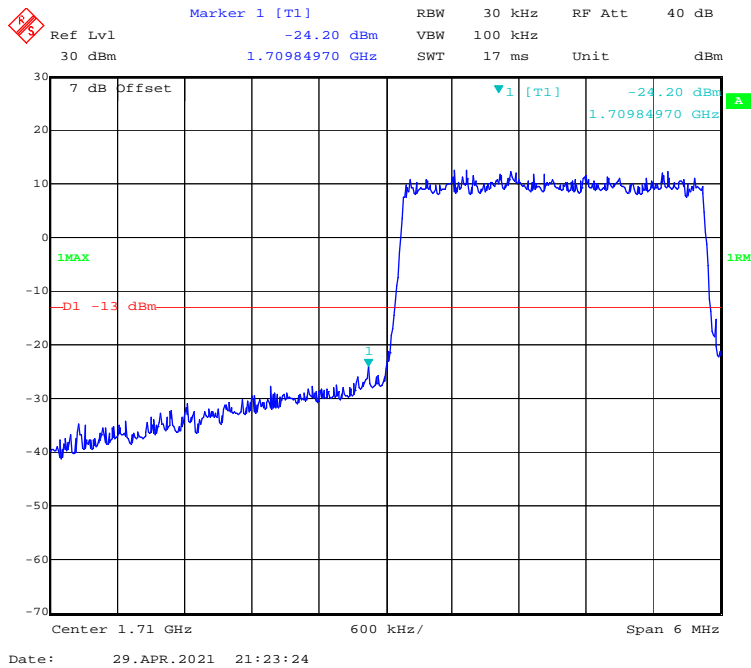


16-QAM (3 MHz, FULL RB) - Right Band Edge

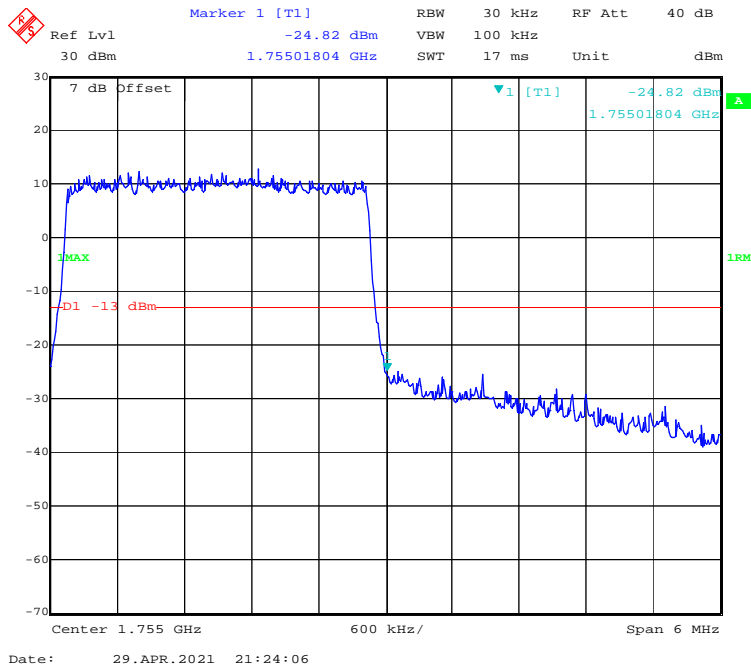


16-QAM (5 MHz, FULL RB) - Left Band Edge

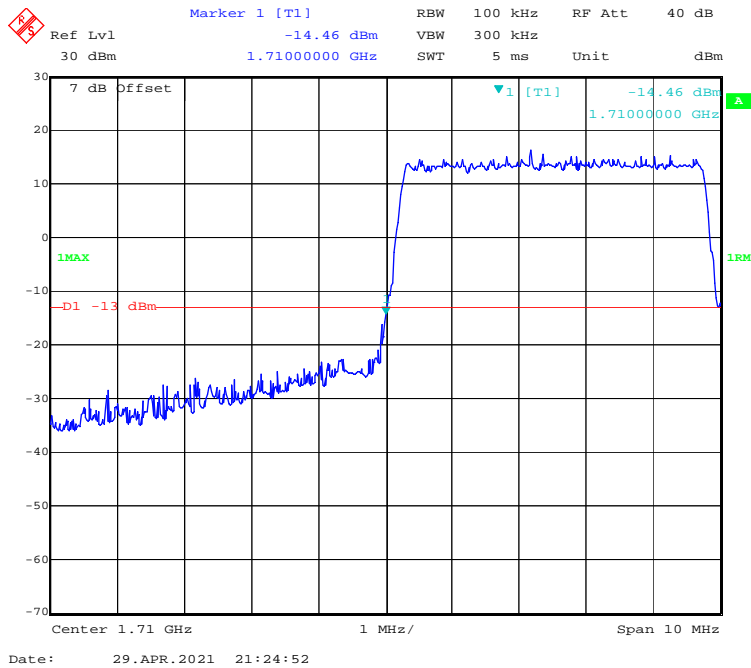


16-QAM (5 MHz, FULL RB) - Right Band Edge

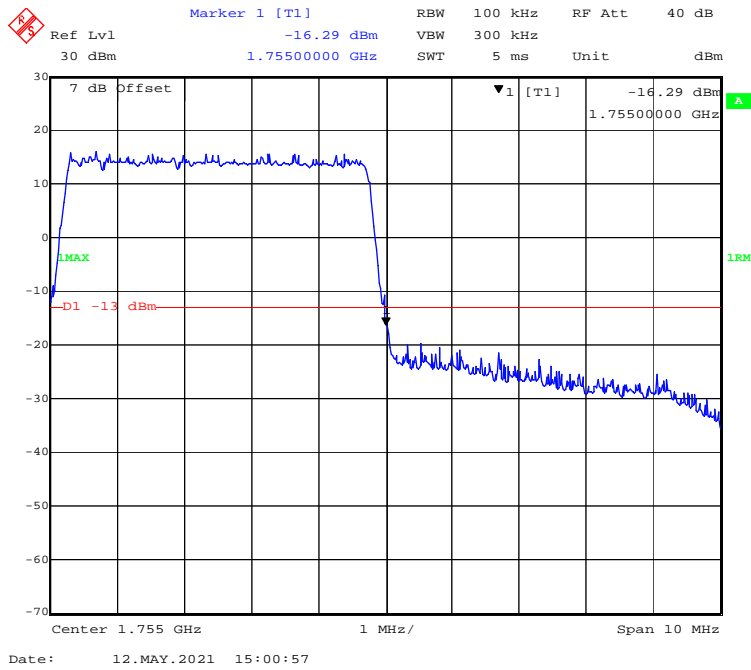


16-QAM (10 MHz, FULL RB) - Left Band Edge

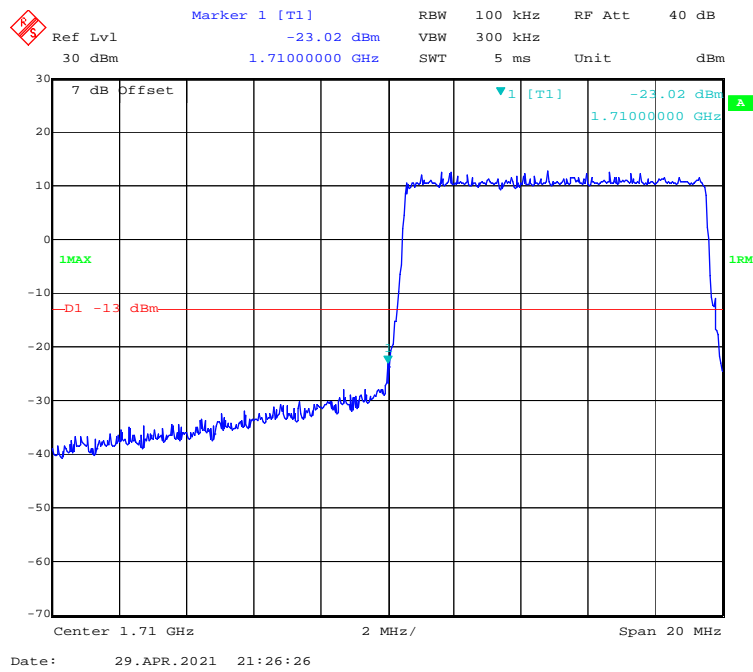


16-QAM (10 MHz, FULL RB) - Right Band Edge

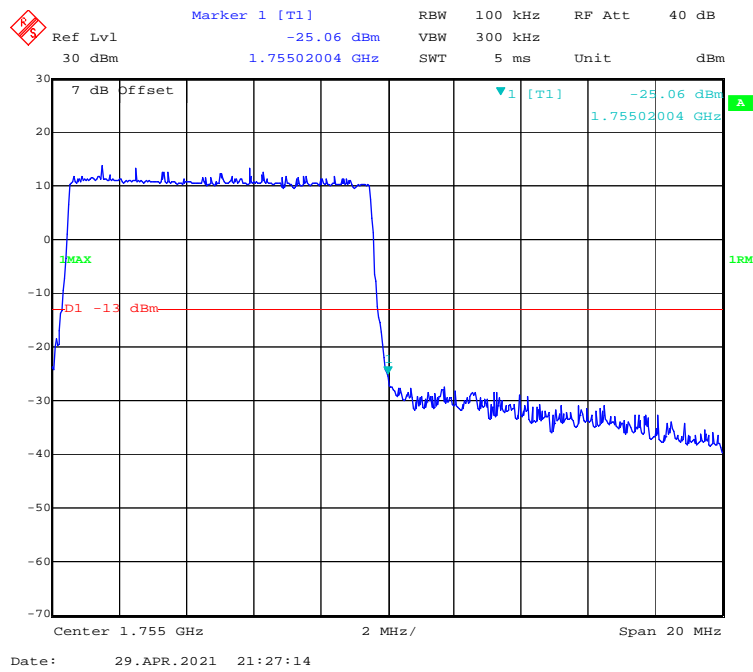


16-QAM (15 MHz, FULL RB) - Left Band Edge

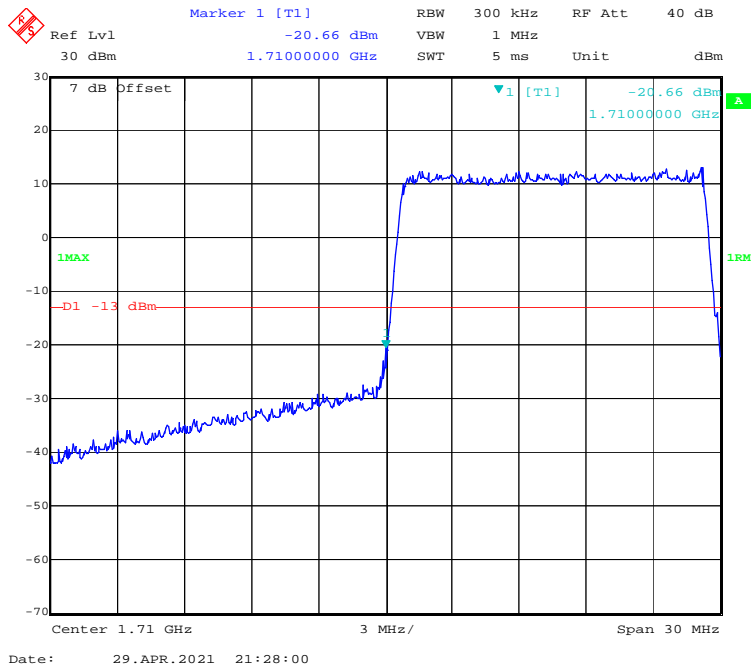


16-QAM (15 MHz, FULL RB) - Right Band Edge

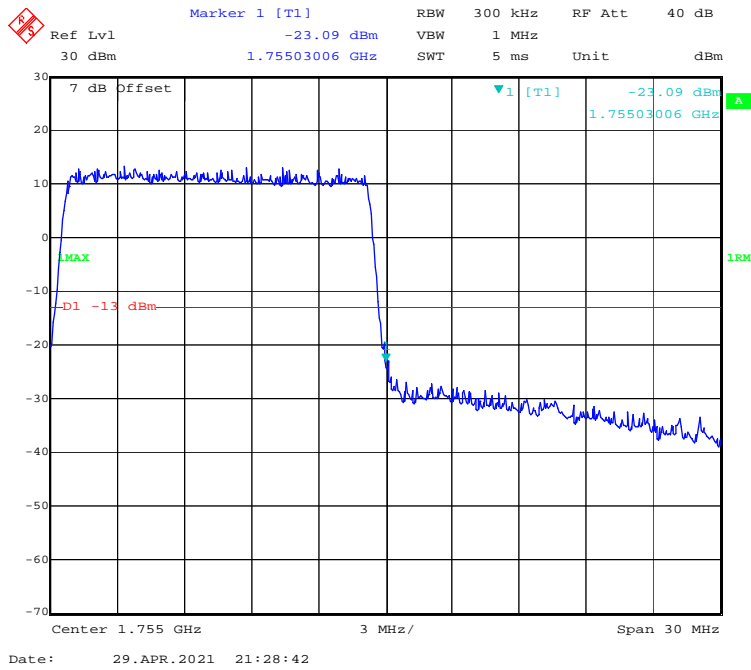

16-QAM (20 MHz, FULL RB) - Left Band Edge

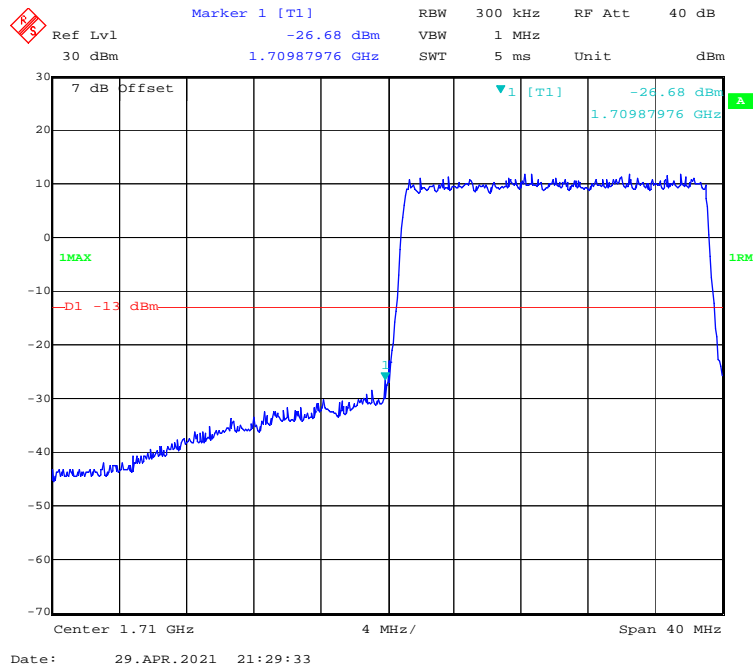


16-QAM (20 MHz, FULL RB) - Right Band Edge

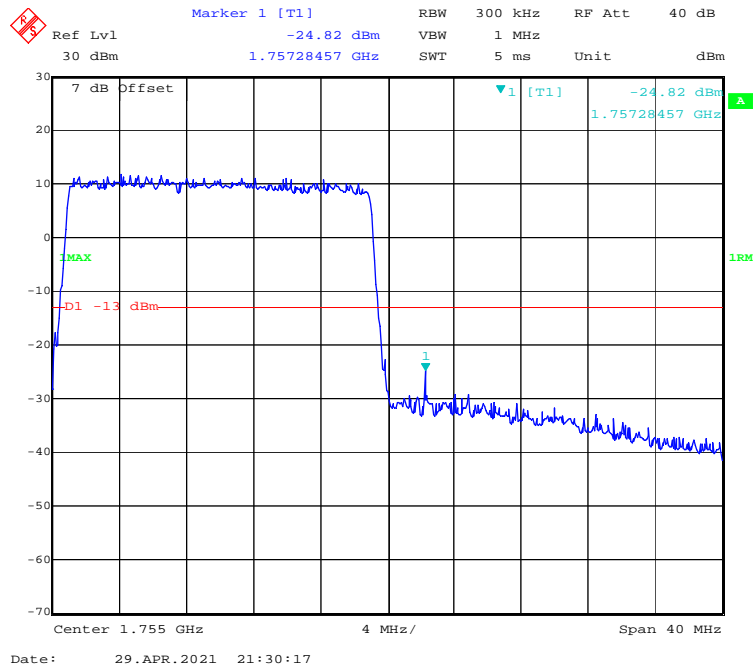


LTE Band 5:


QPSK (1.4 MHz, FULL RB) - Left Band Edge

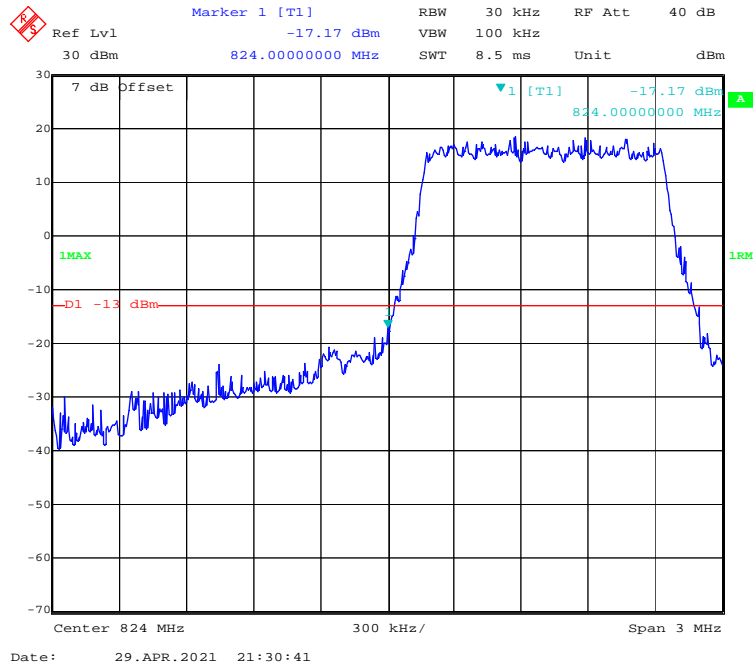


QPSK (1.4 MHz, FULL RB) - Right Band Edge

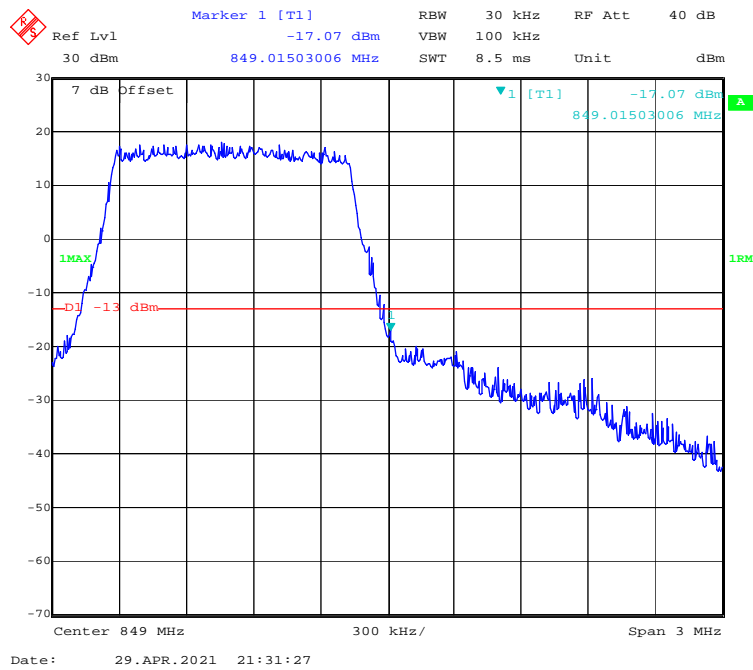


QPSK (3.0 MHz, FULL RB) - Left Band Edge

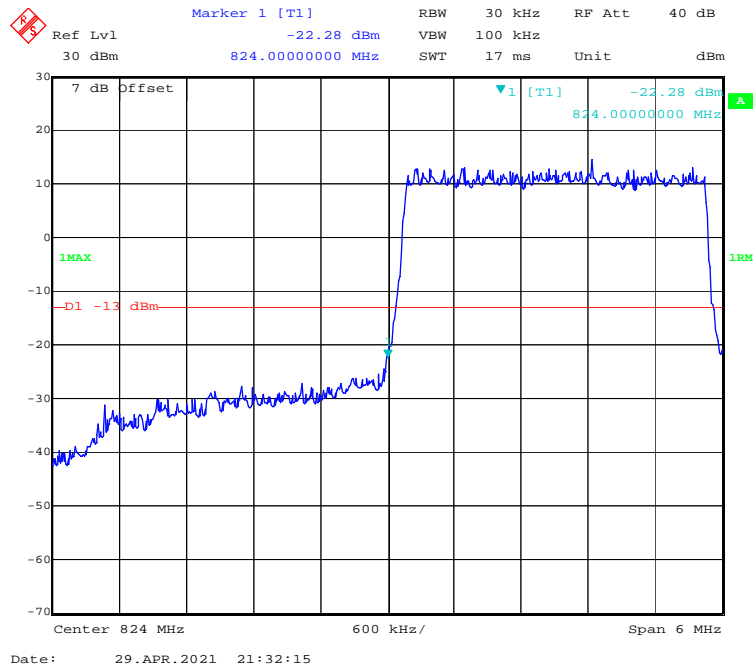


QPSK (3.0 MHz, FULL RB) - Right Band Edge

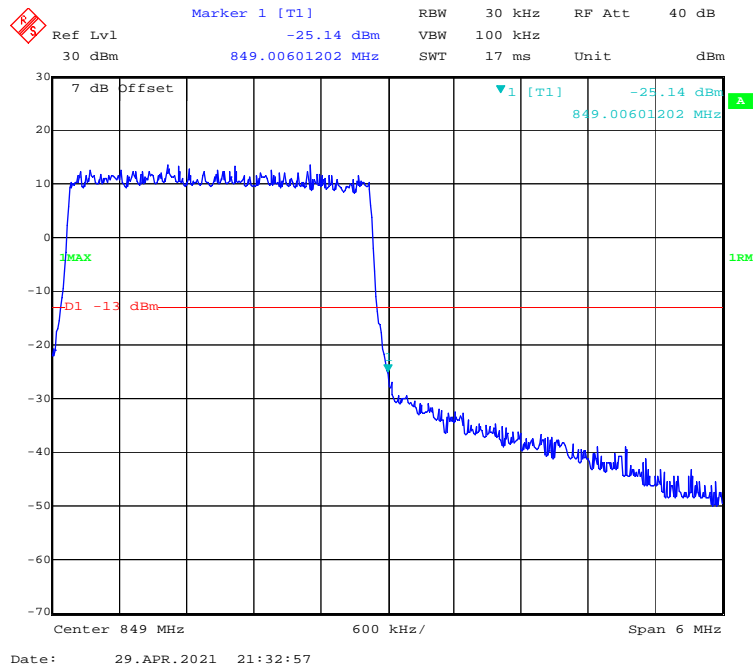


QPSK (5.0 MHz, FULL RB) - Left Band Edge

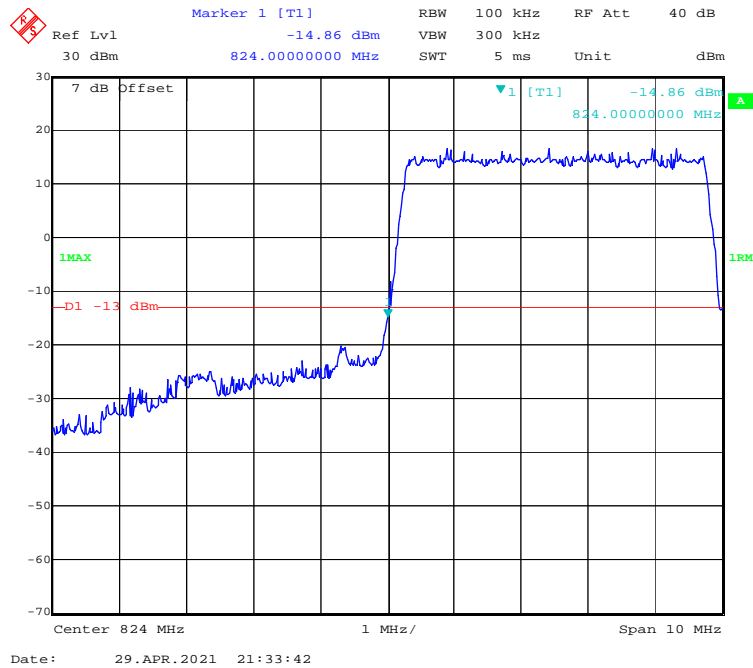


QPSK (5.0 MHz, FULL RB) - Right Band Edge

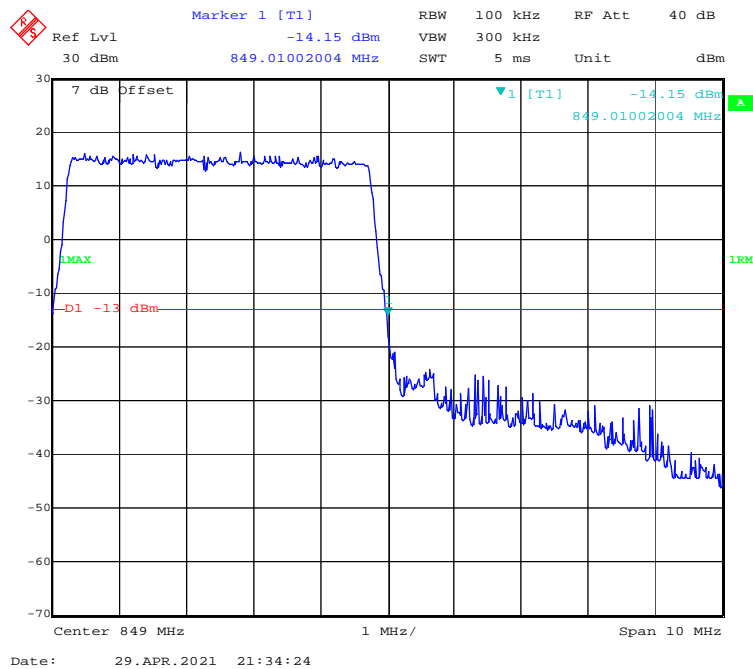


QPSK (10.0 MHz, FULL RB) - Left Band Edge

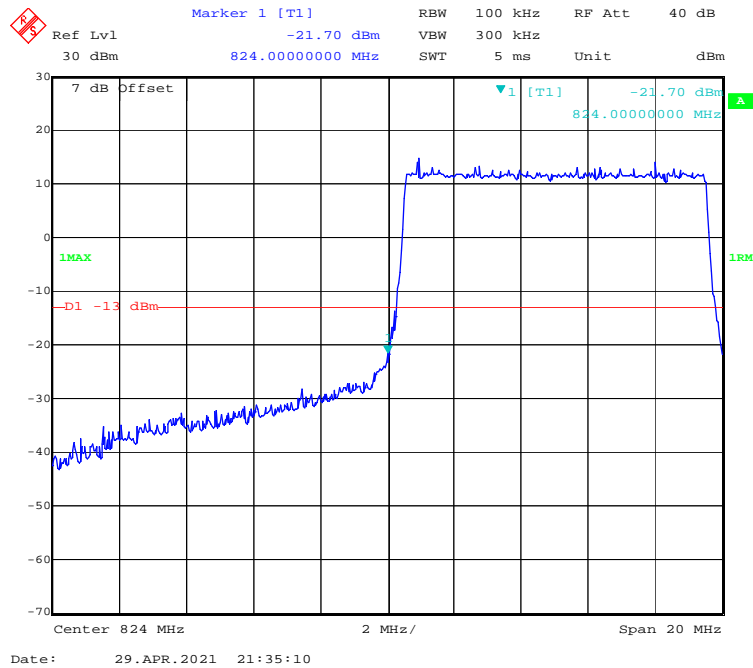


QPSK (10.0 MHz, FULL RB) - Right Band Edge

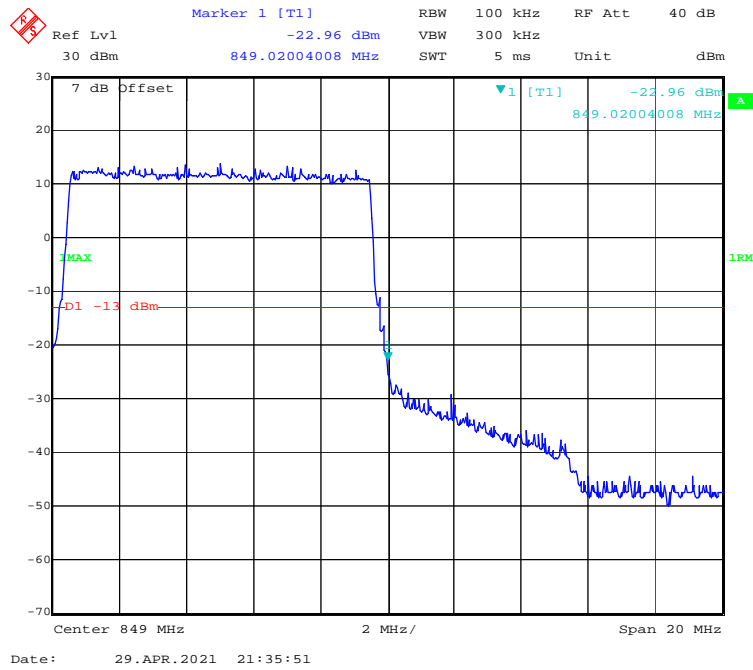


16-QAM (1.4 MHz, FULL RB) - Left Band Edge

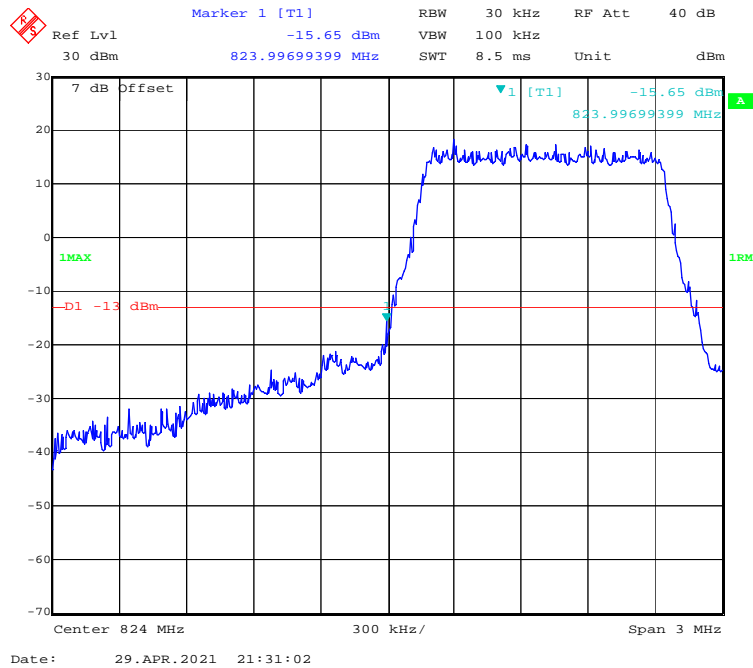


16-QAM (1.4 MHz, FULL RB) - Right Band Edge

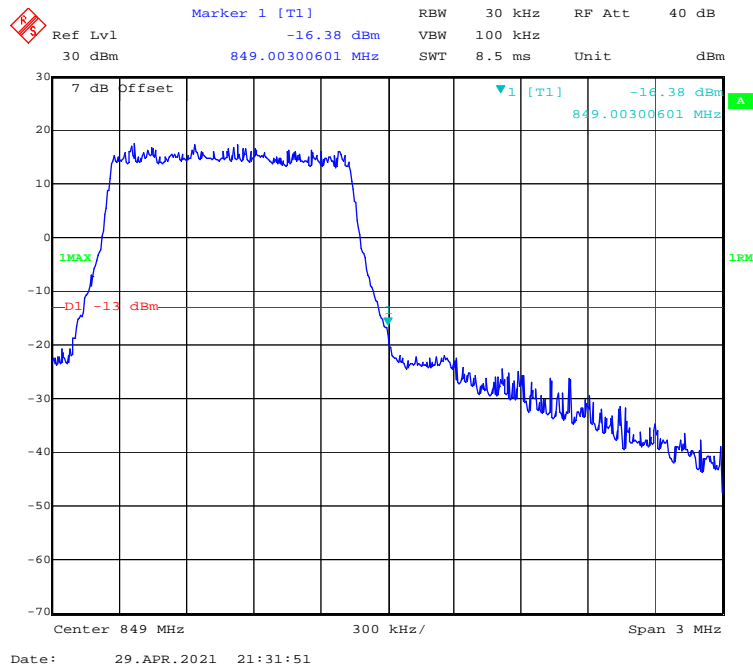


16-QAM (3.0 MHz, FULL RB) - Left Band Edge

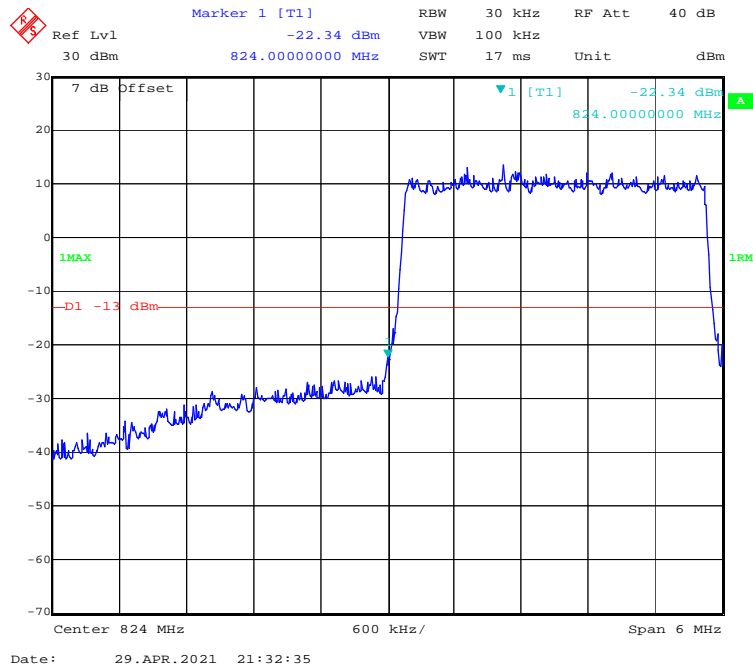


16-QAM (3.0 MHz, FULL RB) - Right Band Edge

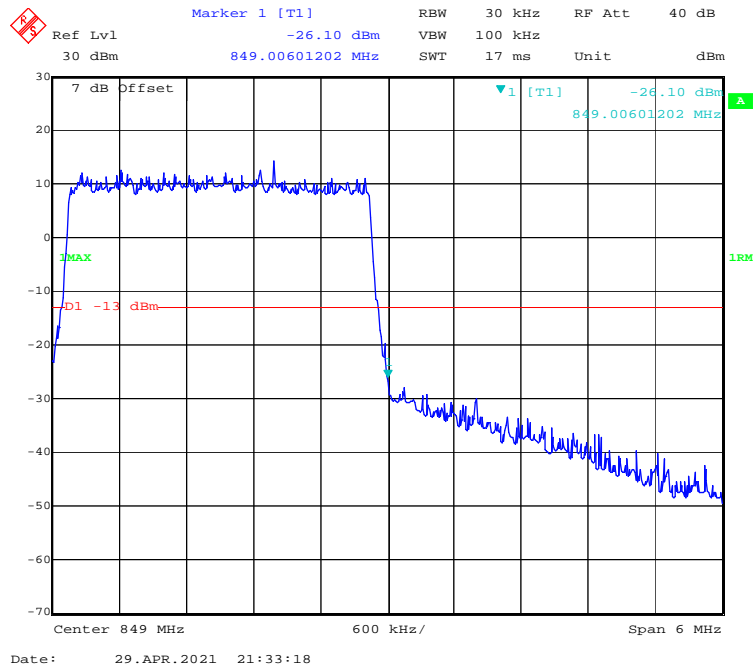


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

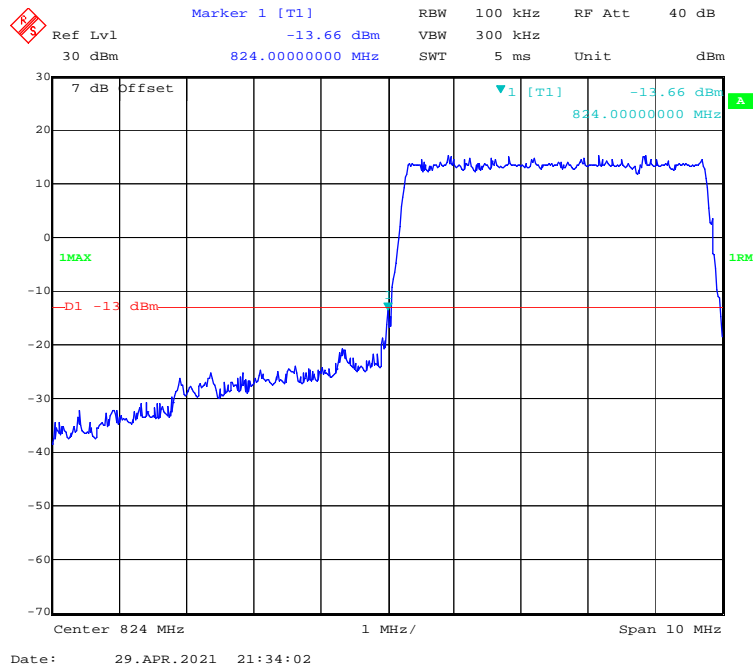


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

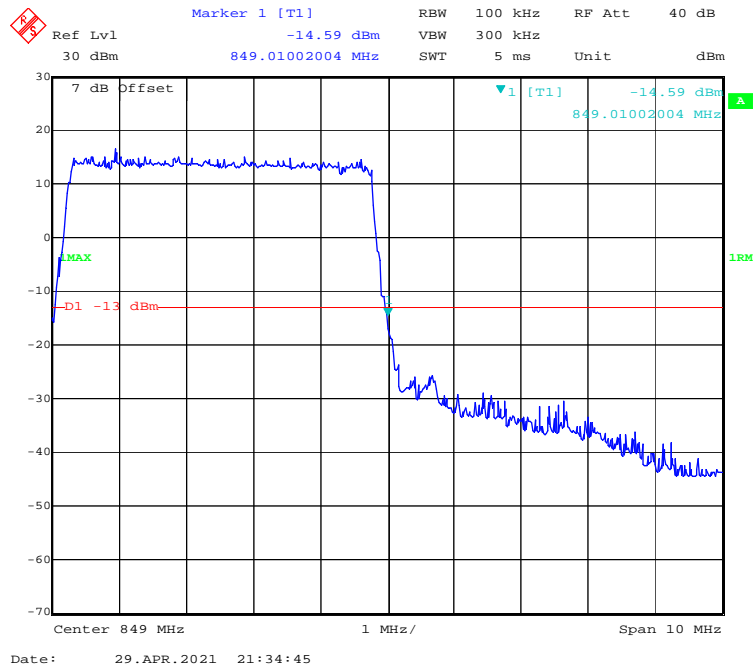

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

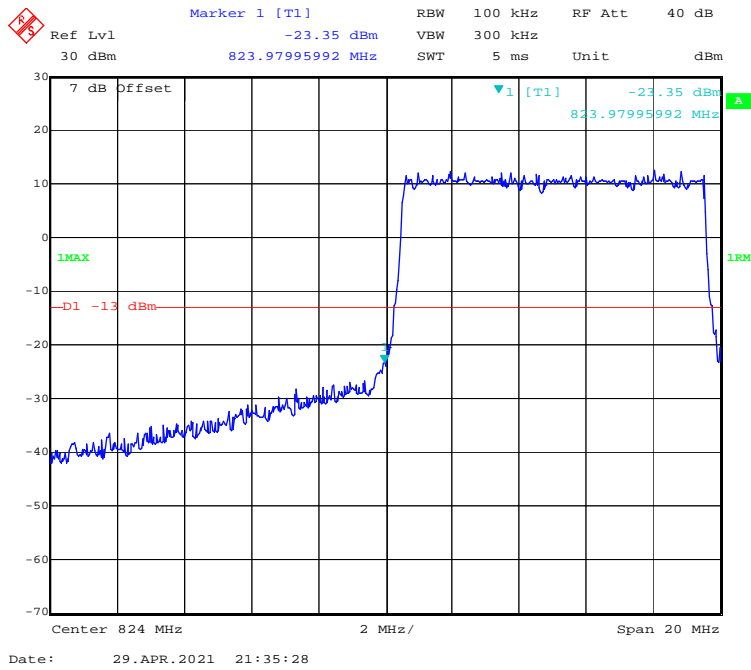


16-QAM (10.0 MHz, FULL RB) - Right Band Edge

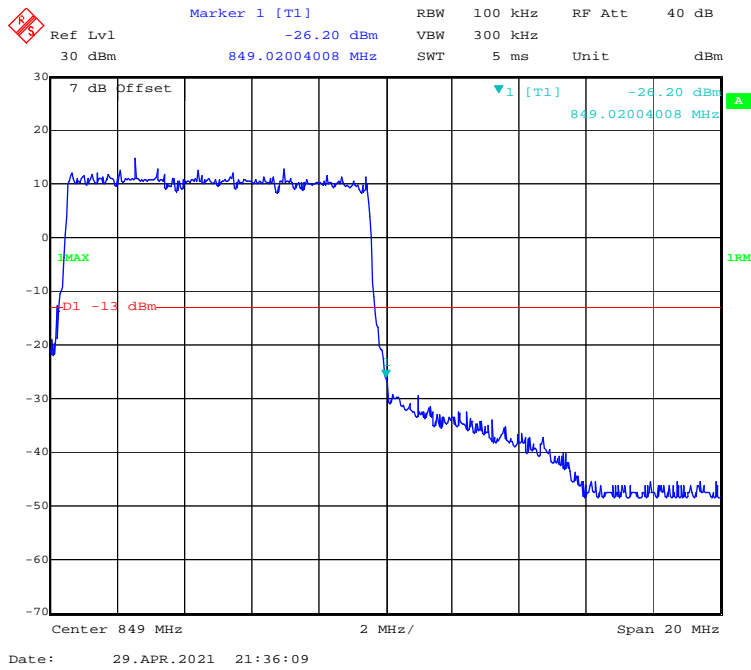


LTE Band 7:


QPSK (5.0 MHz, FULL RB) - Left Band Edge

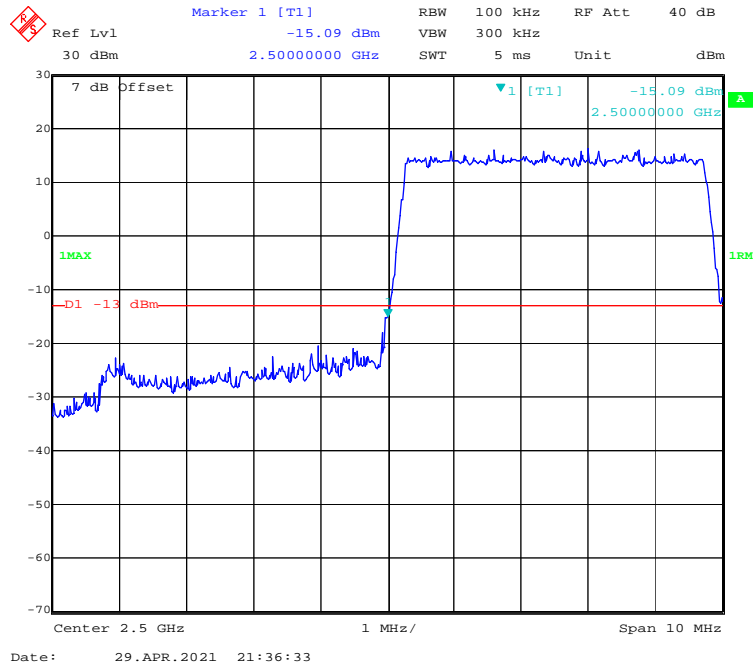


QPSK (5.0 MHz, FULL RB) - Right Band Edge

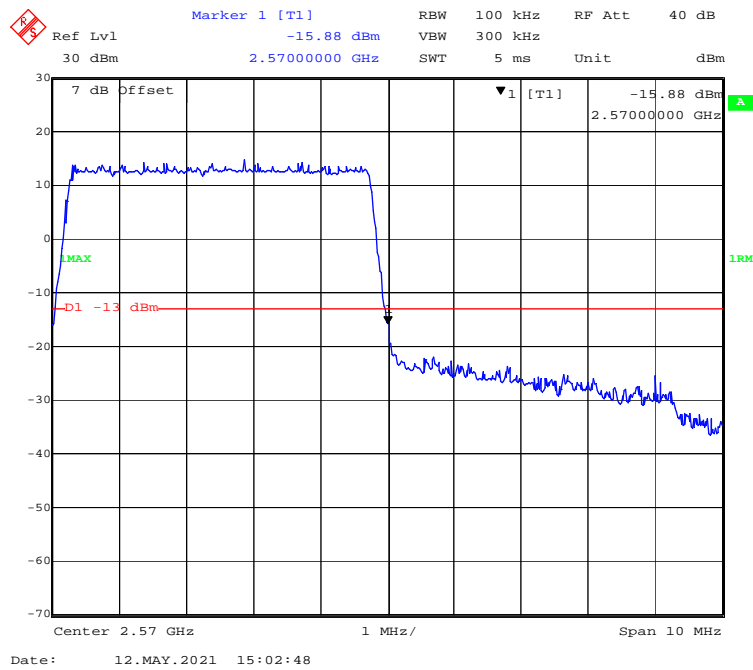


QPSK (10.0 MHz, FULL RB) - Left Band Edge

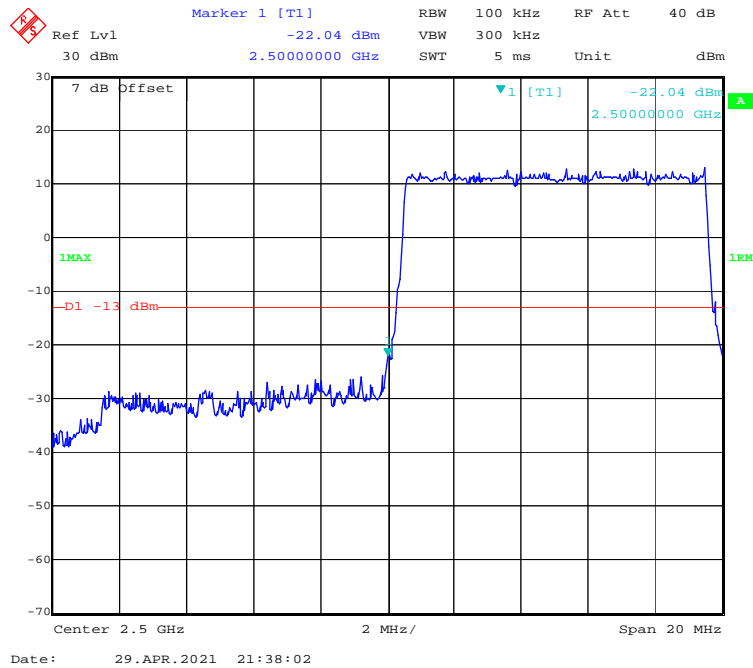


QPSK (10.0 MHz, FULL RB) - Right Band Edge

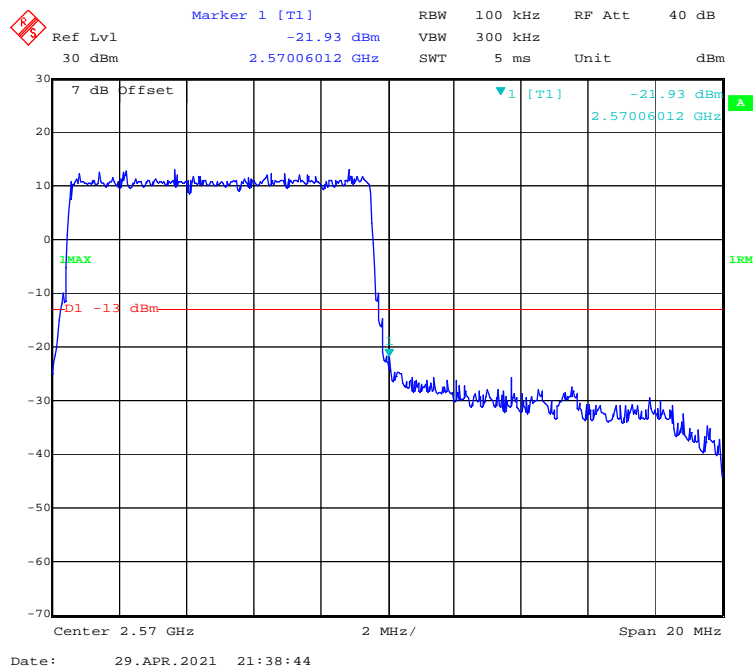


QPSK (15.0 MHz, FULL RB) - Left Band Edge

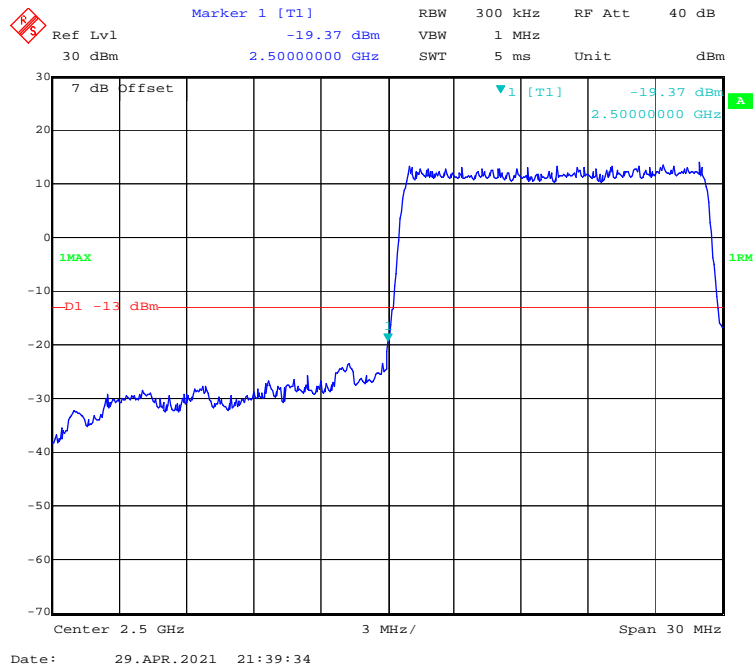


QPSK (15.0 MHz, FULL RB) - Right Band Edge

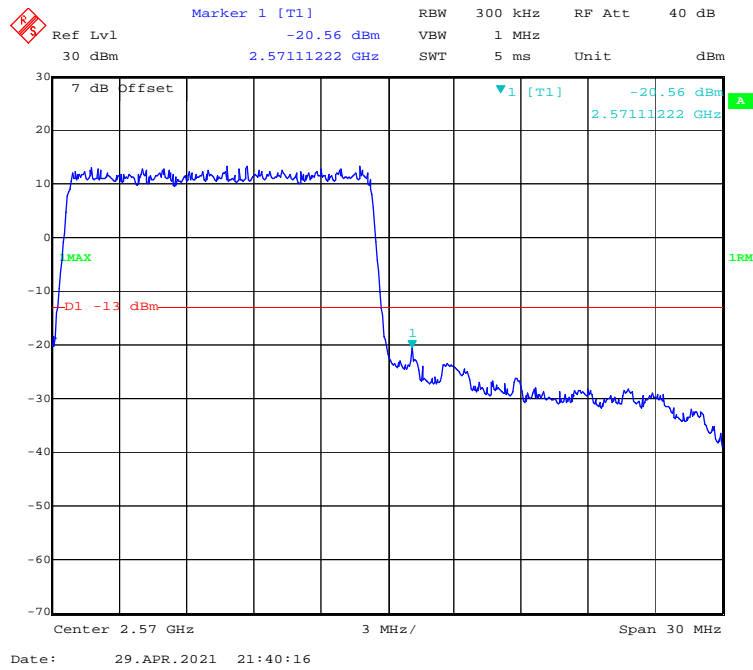


QPSK (20.0 MHz, FULL RB) - Left Band Edge

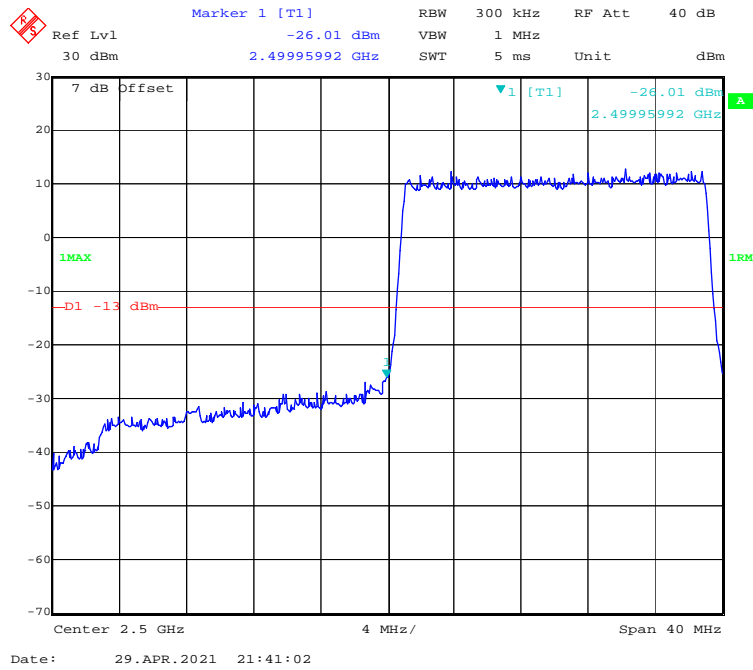


QPSK (20.0 MHz, FULL RB) - Right Band Edge

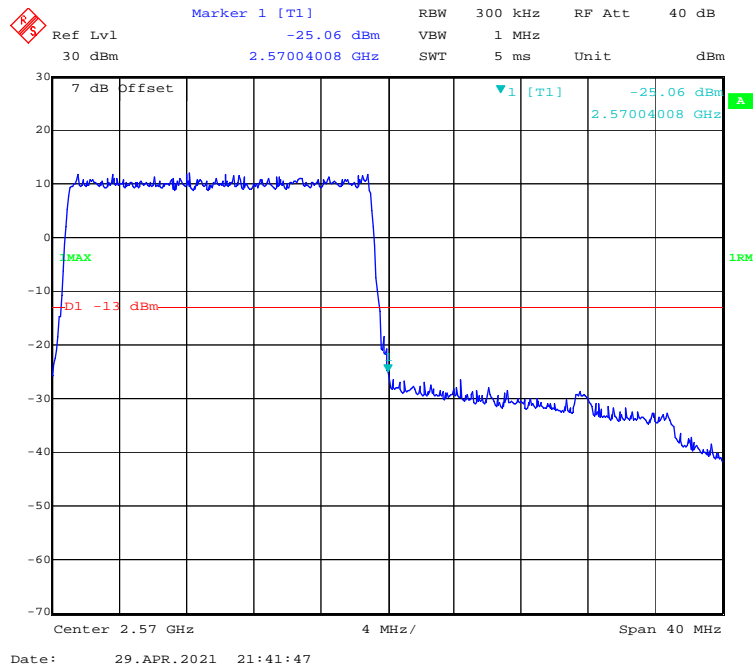


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

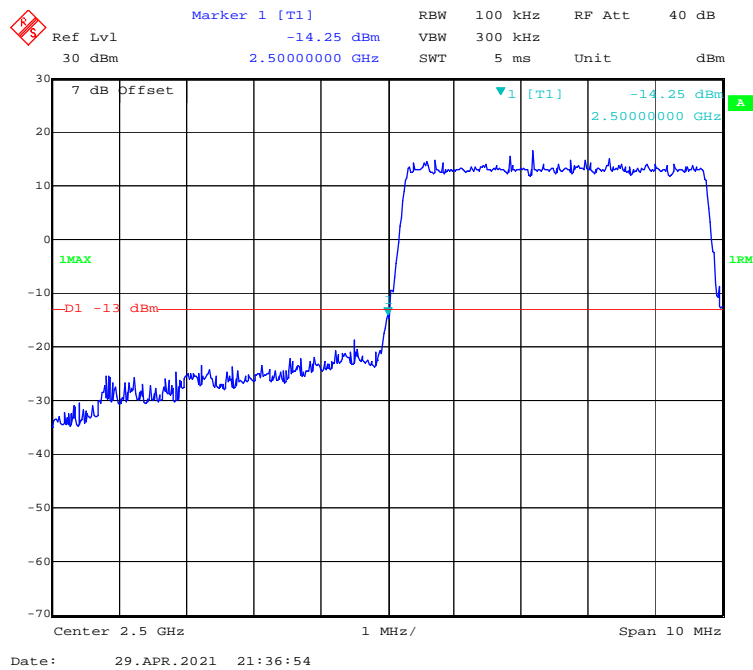


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

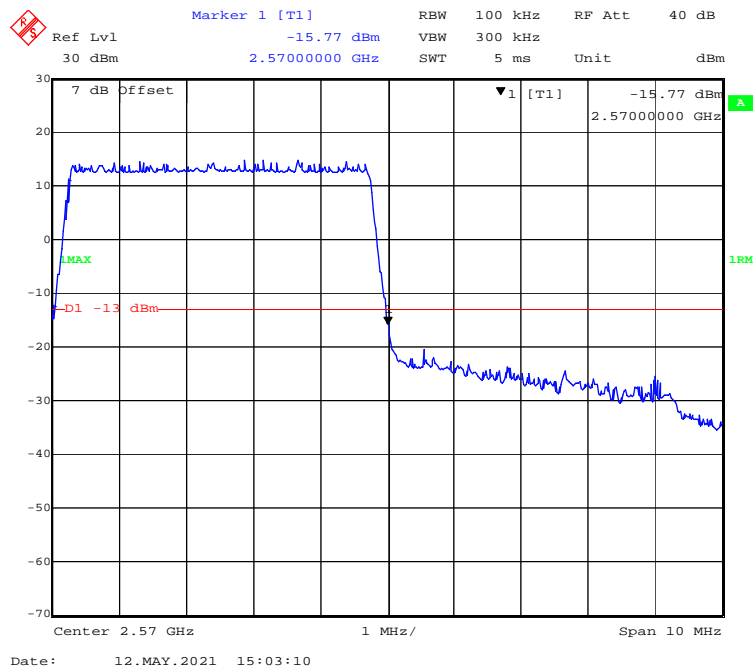


16-QAM (10.0 MHz, FULL RB) - Left Band Edge

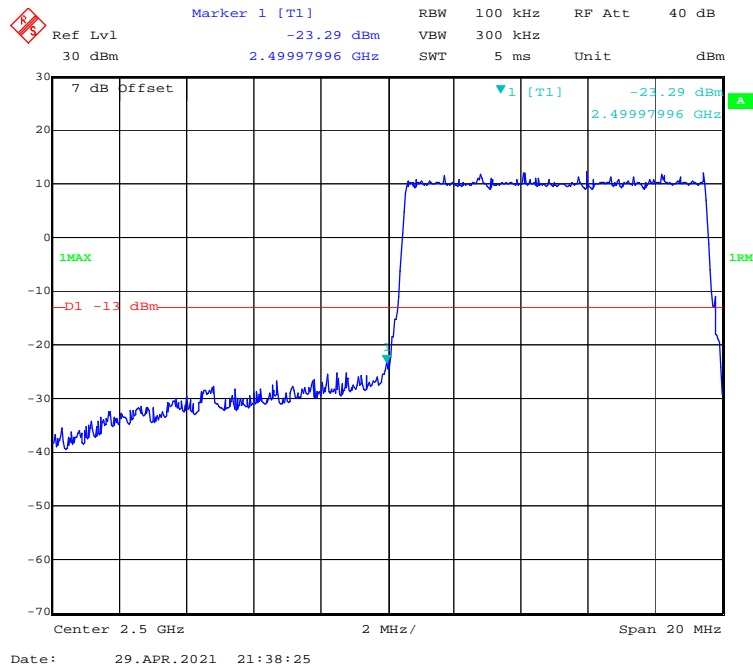


16-QAM (10.0 MHz, FULL RB) - Right Band Edge

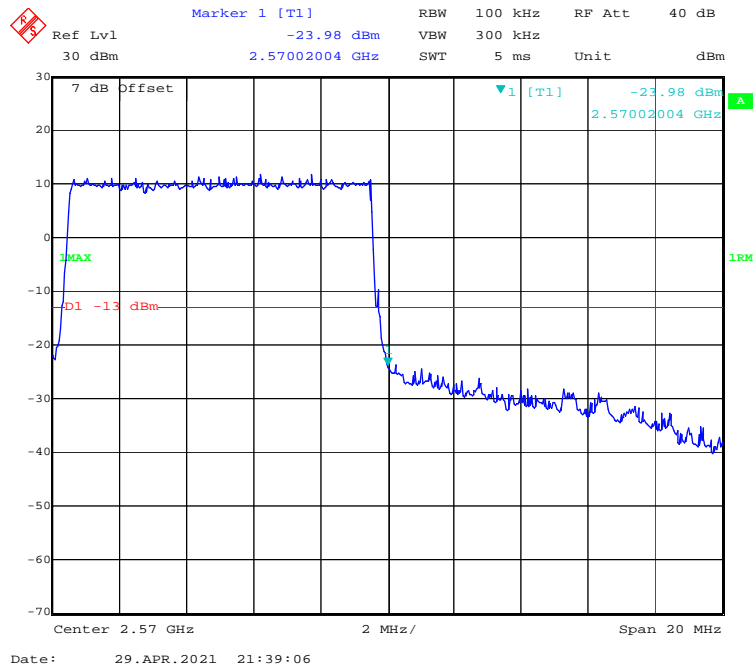


16-QAM (15.0 MHz, FULL RB) - Left Band Edge

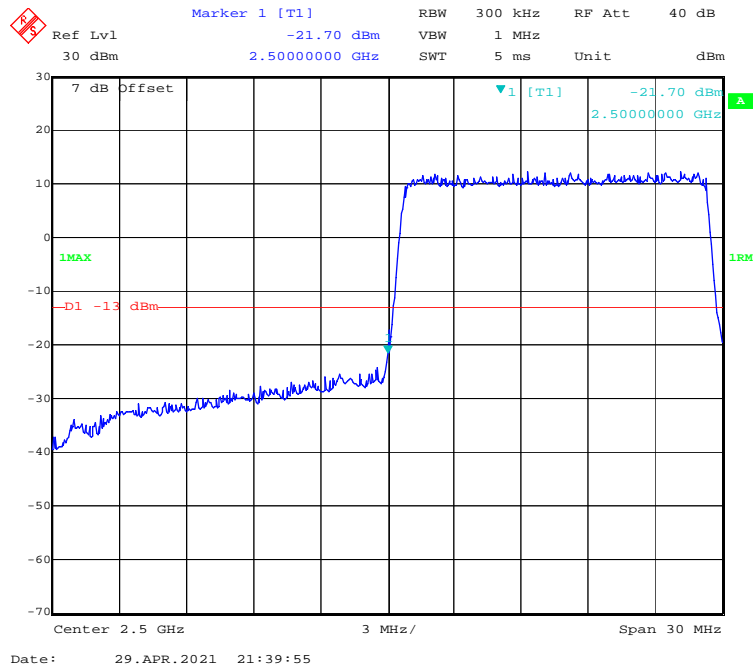


16-QAM (15.0 MHz, FULL RB) - Right Band Edge

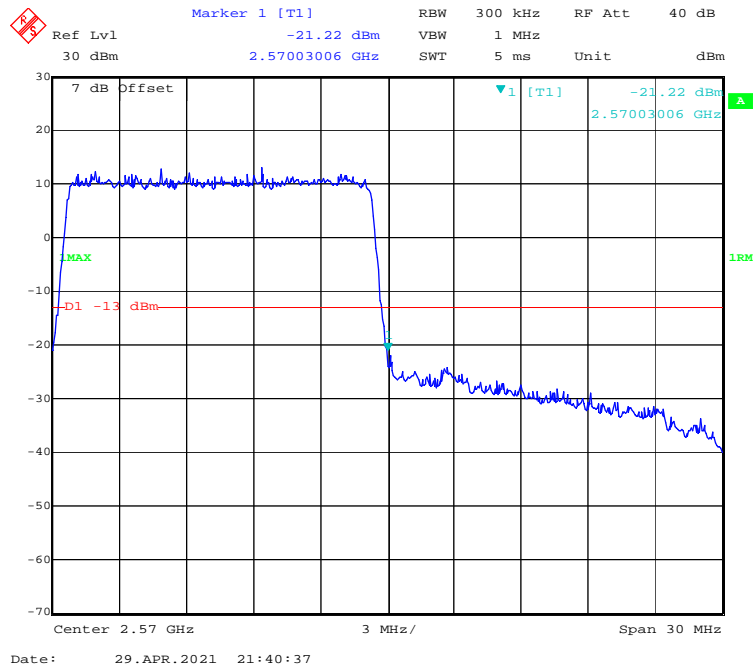

16-QAM (20.0 MHz, FULL RB) - Left Band Edge

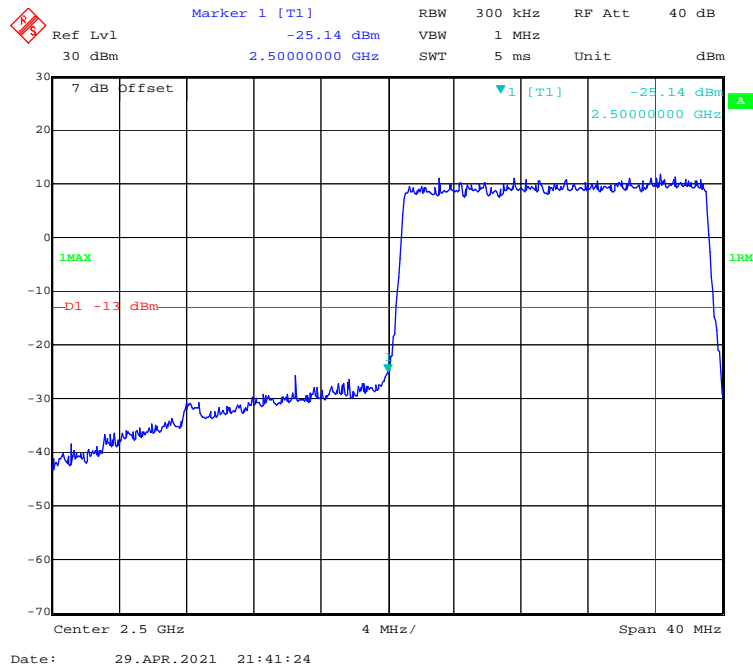


16-QAM (20.0 MHz, FULL RB) - Right Band Edge

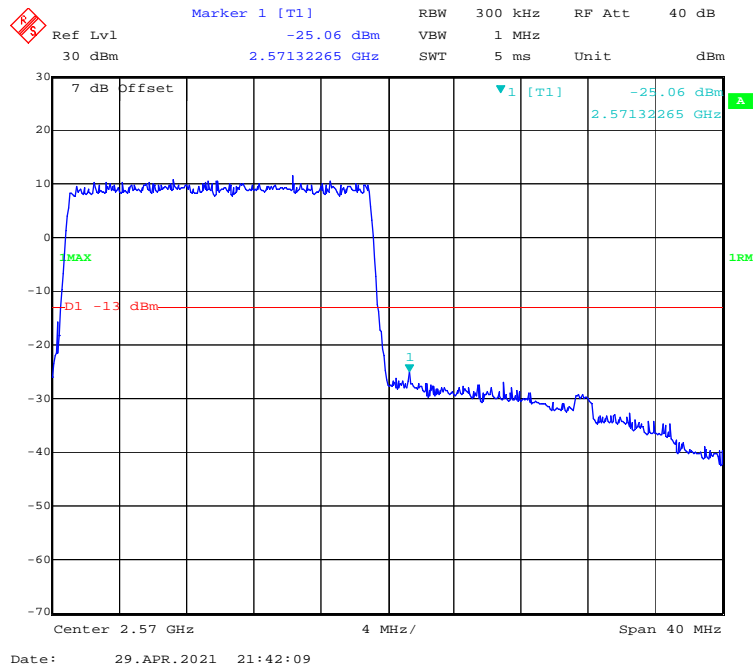


LTE Band 12:


QPSK (1.4 MHz, FULL RB) - Left Band Edge

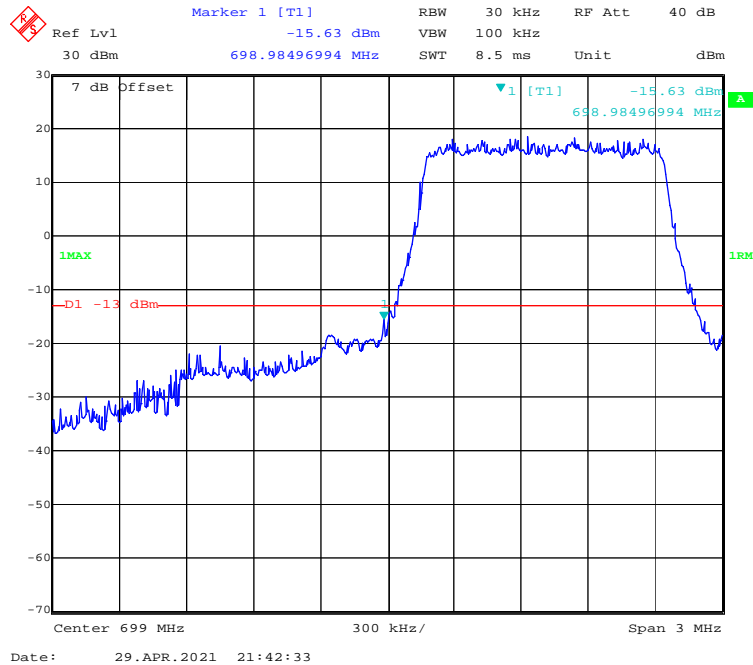


QPSK (1.4 MHz, FULL RB) - Right Band Edge

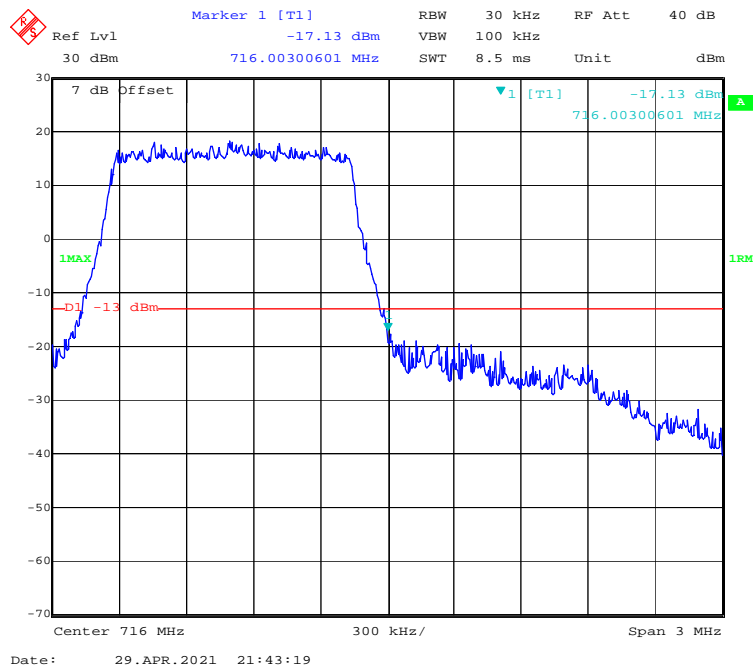


QPSK (3.0 MHz, FULL RB) - Left Band Edge

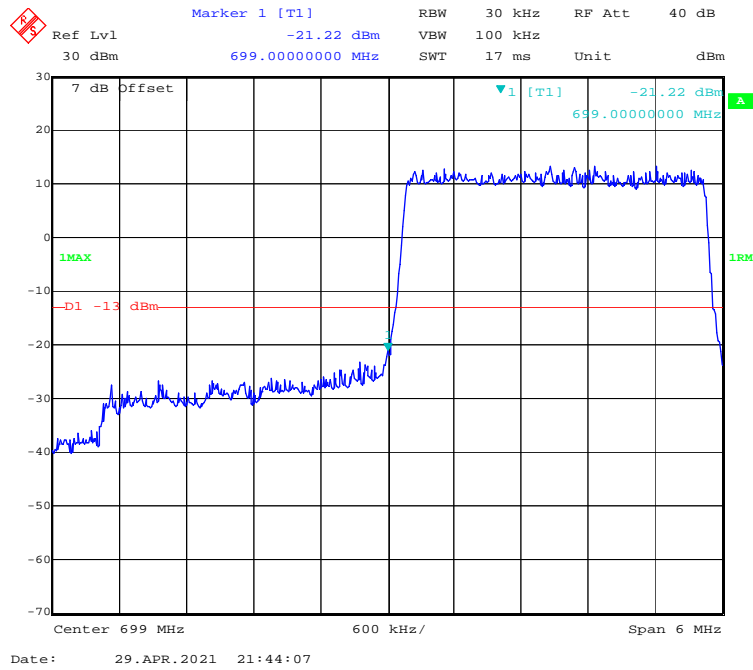


QPSK (3.0 MHz, FULL RB) - Right Band Edge

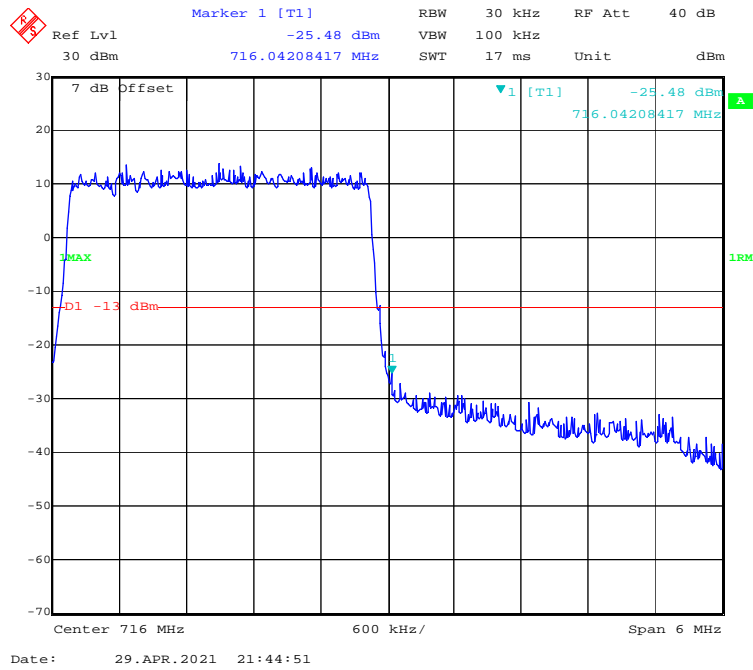


QPSK (5.0 MHz, FULL RB) - Left Band Edge

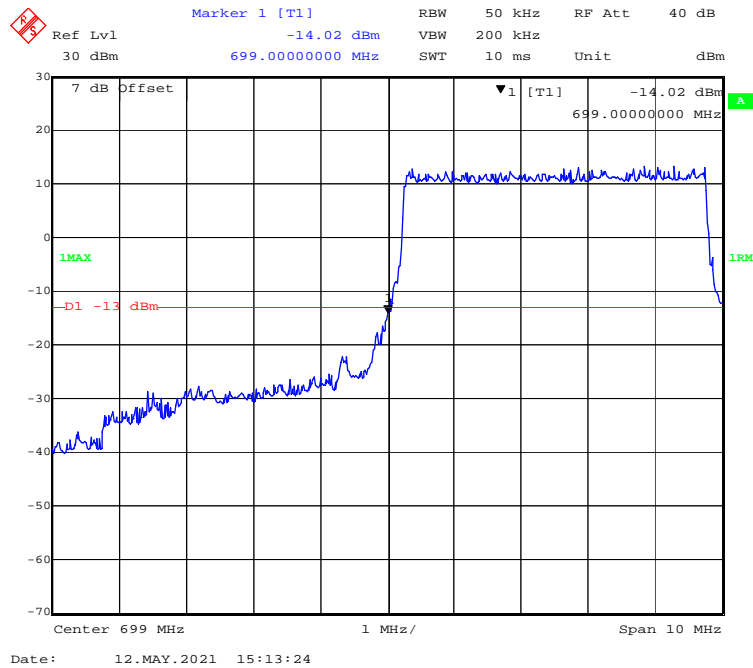


QPSK (5.0 MHz, FULL RB) - Right Band Edge

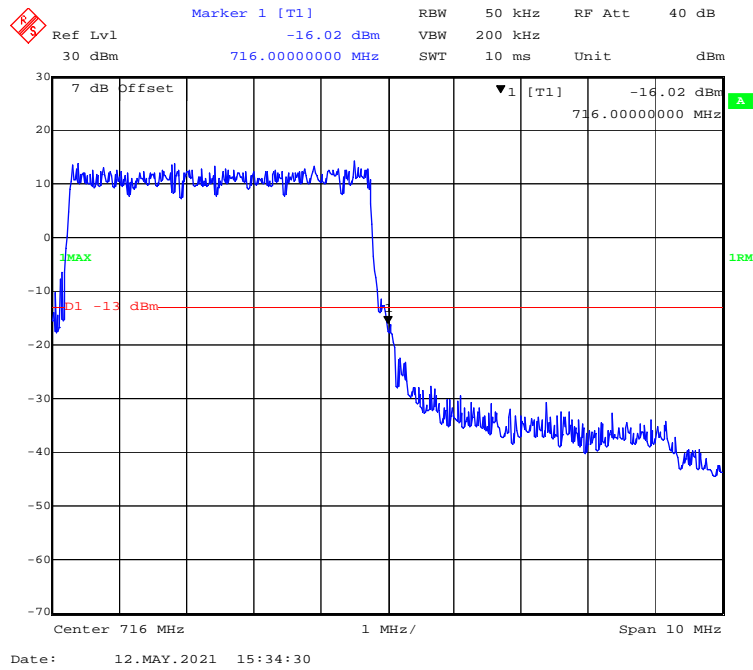


QPSK (10.0 MHz, FULL RB) - Left Band Edge

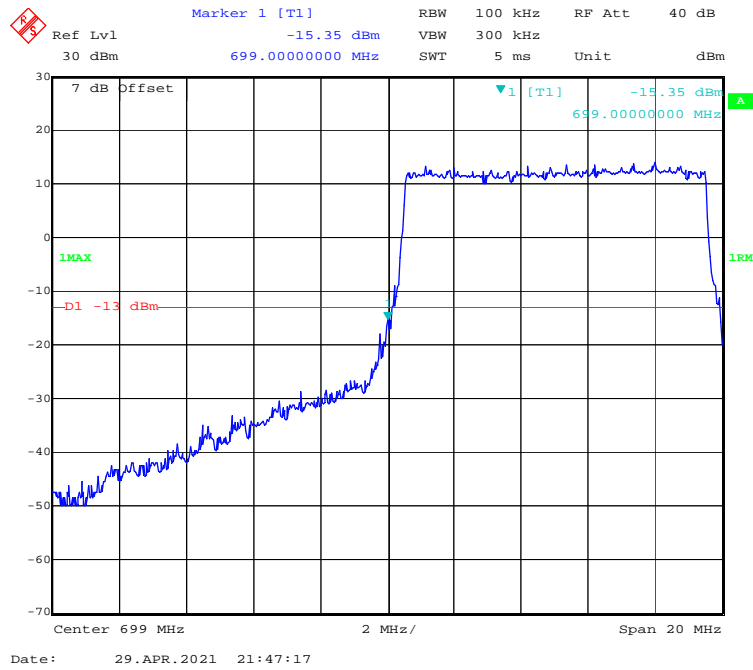


QPSK (10.0 MHz, FULL RB) - Right Band Edge

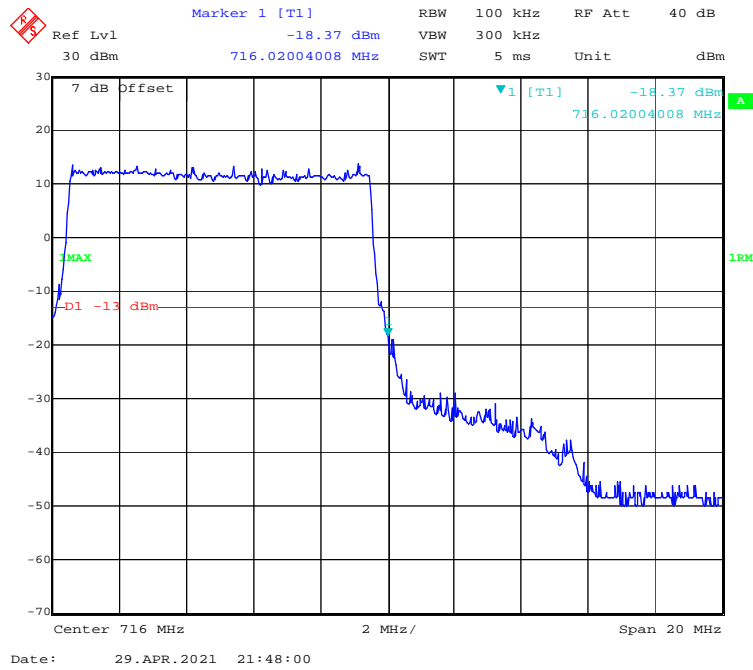


16-QAM (1.4 MHz, FULL RB) - Left Band Edge

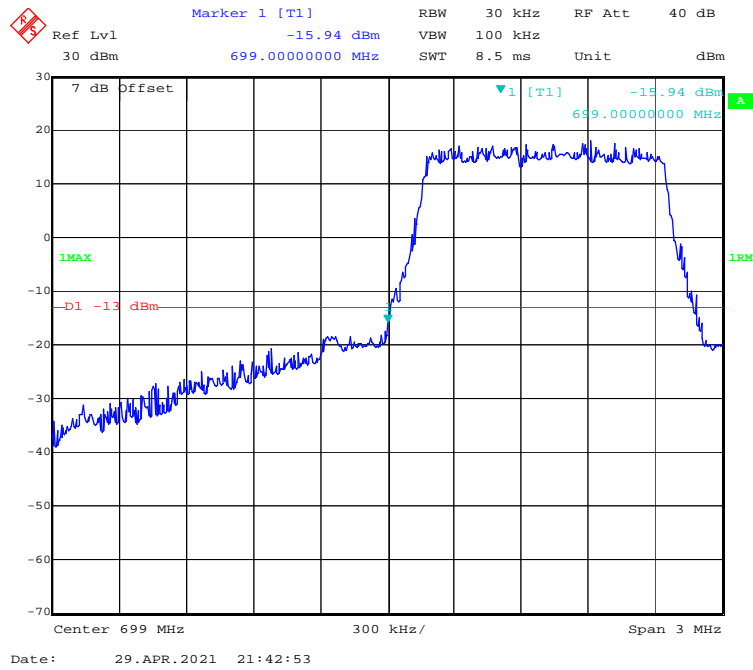


16-QAM (1.4 MHz, FULL RB) - Right Band Edge

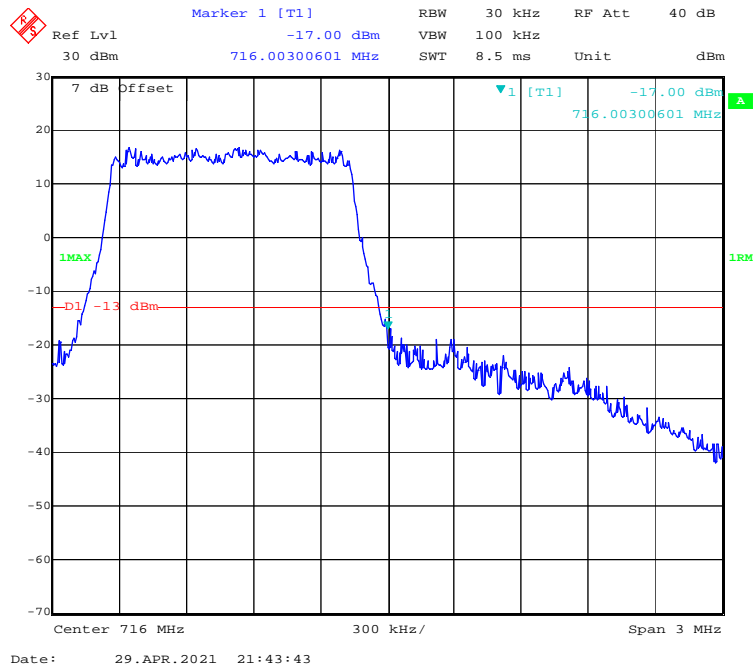


16-QAM (3.0 MHz, FULL RB) - Left Band Edge

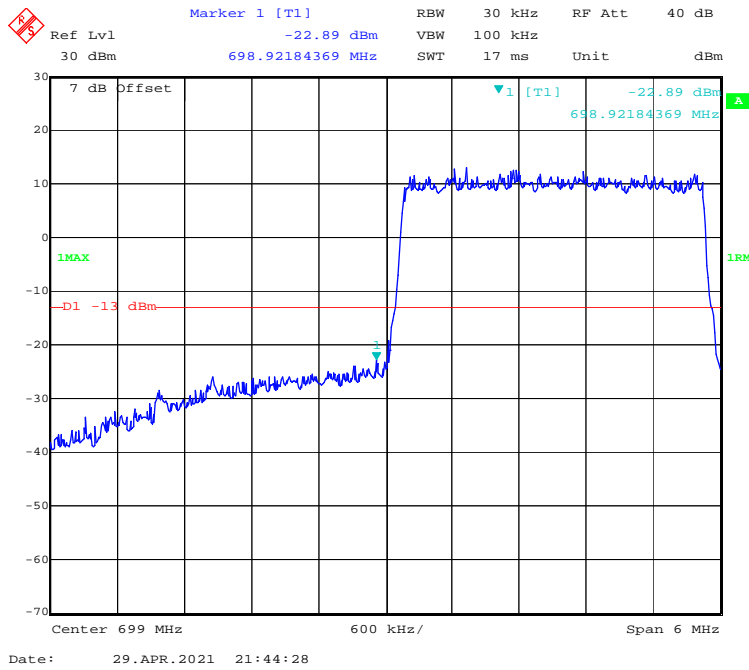


16-QAM (3.0 MHz, FULL RB) - Right Band Edge

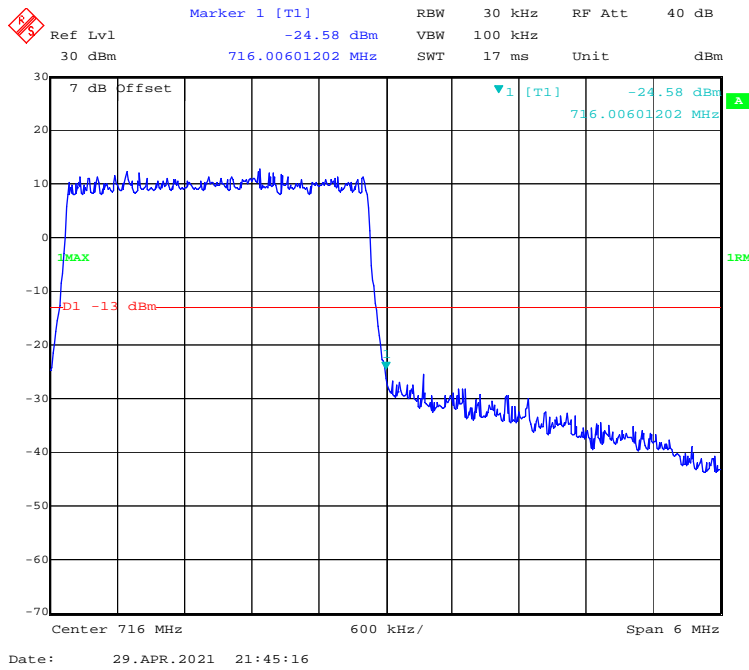


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

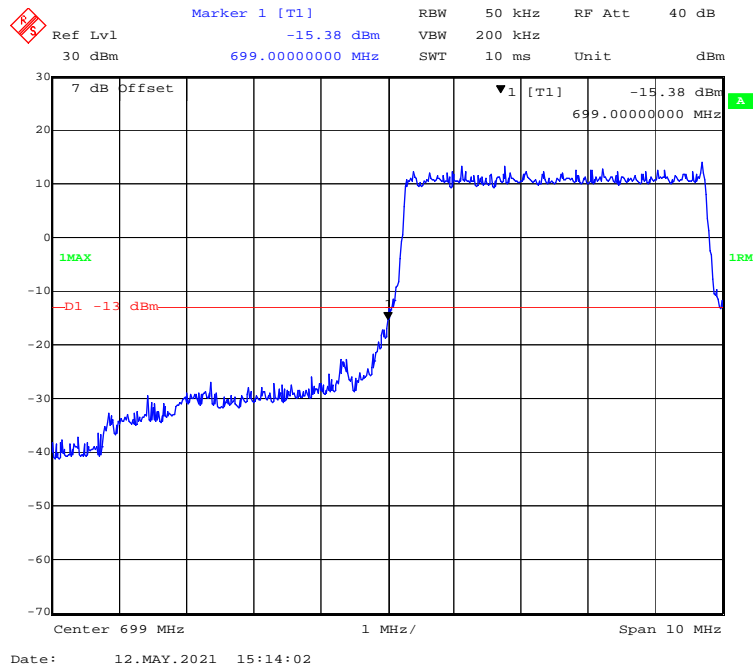


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

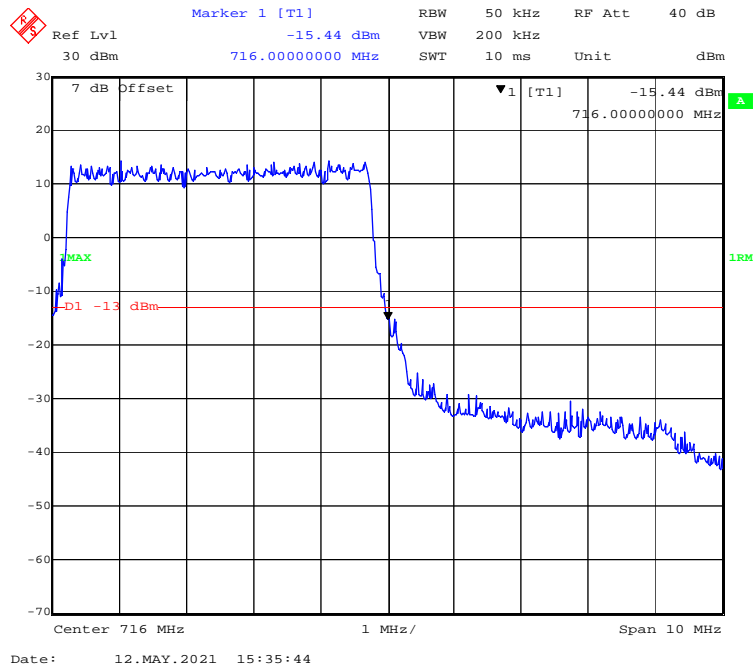

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

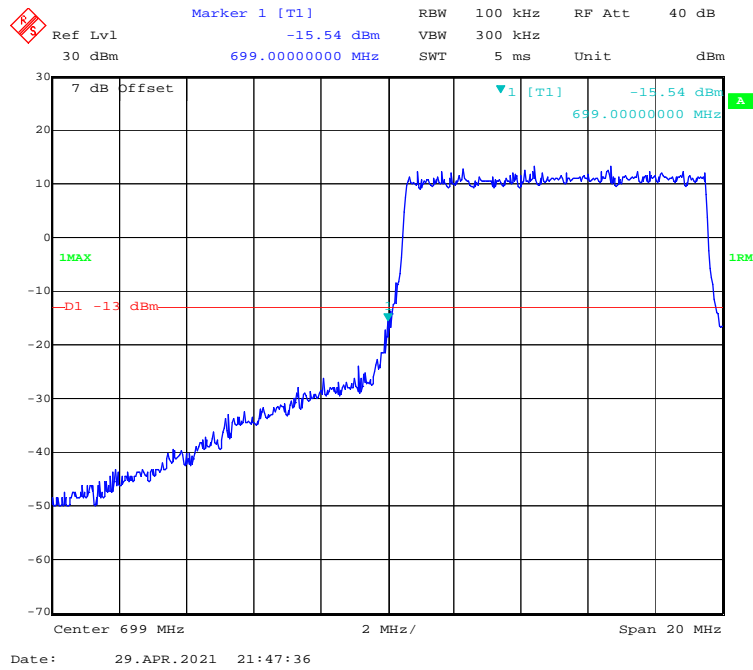


16-QAM (10.0 MHz, FULL RB) - Right Band Edge

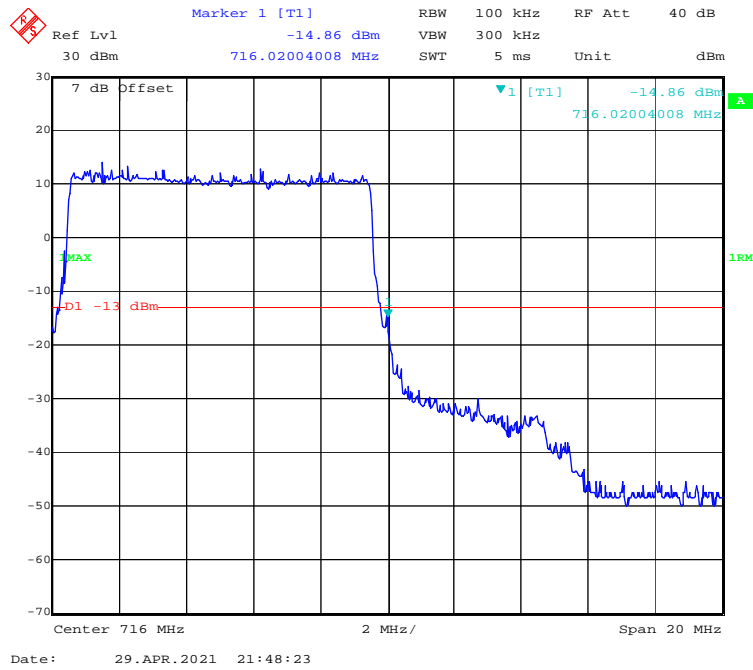


LTE Band 17:


QPSK (5.0 MHz, FULL RB) - Left Band Edge

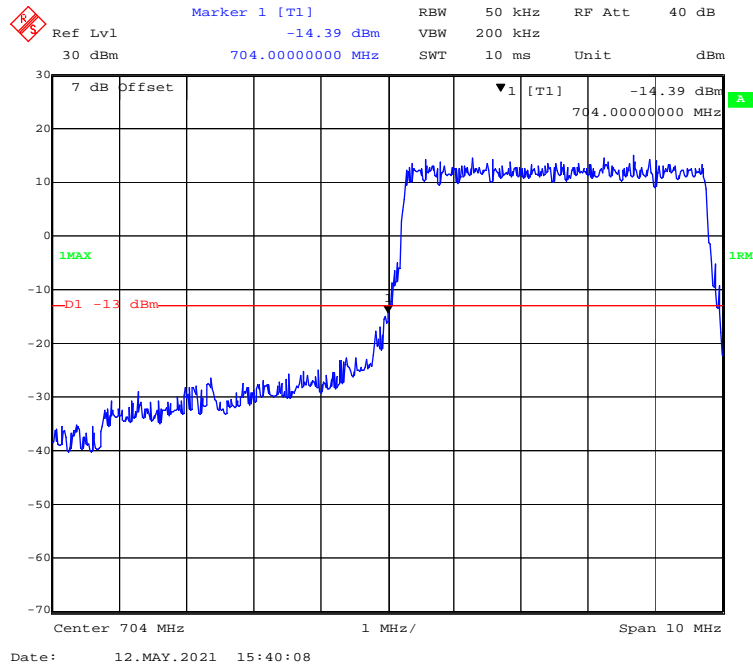


QPSK (5.0 MHz, FULL RB) - Right Band Edge

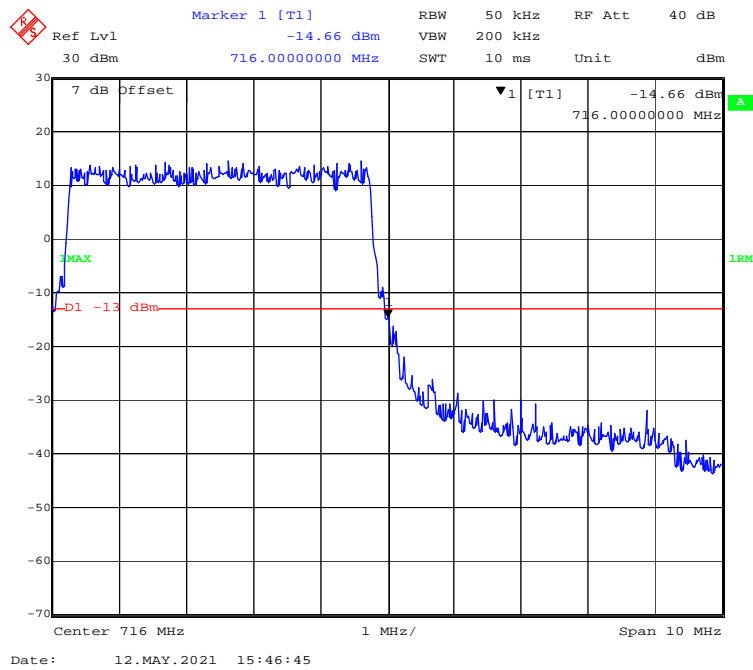


QPSK (10.0 MHz, FULL RB) - Left Band Edge

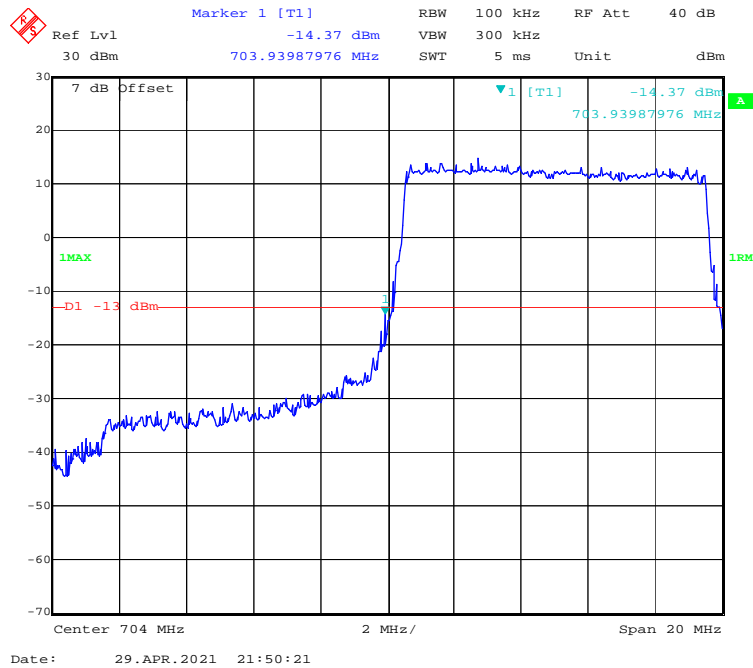


QPSK (10.0 MHz, FULL RB) - Right Band Edge

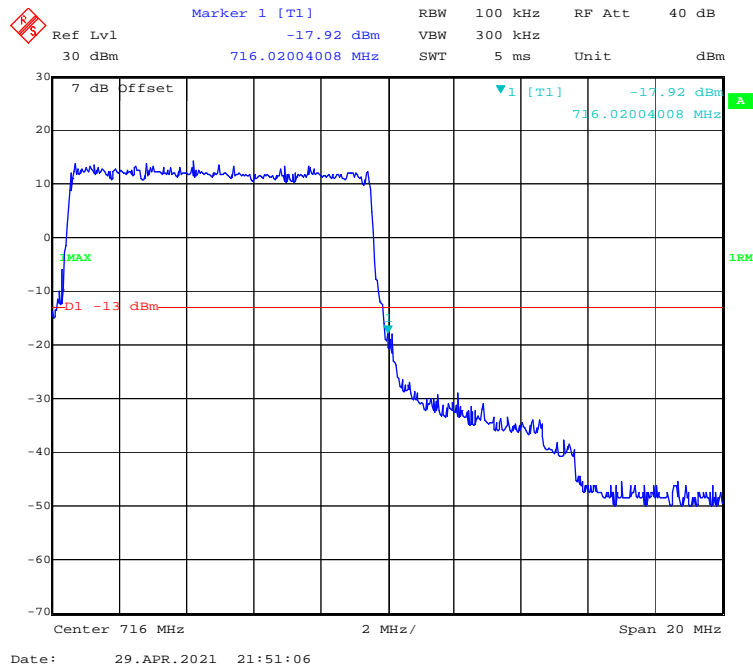


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

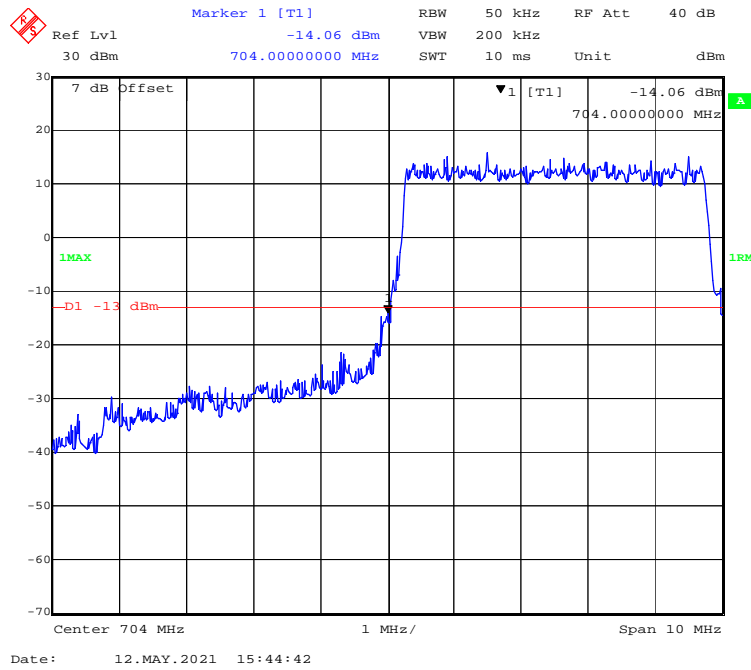


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

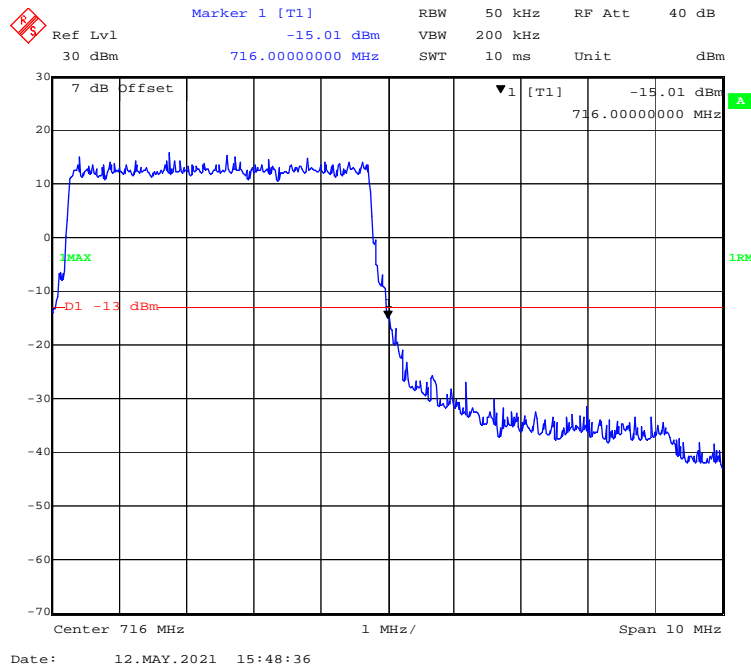

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

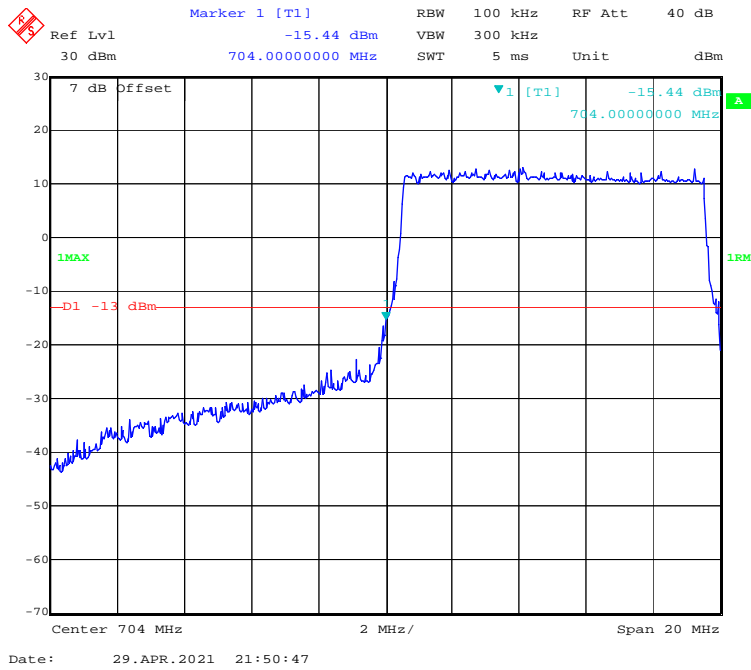


16-QAM (10.0 MHz, FULL RB) - Right Band Edge

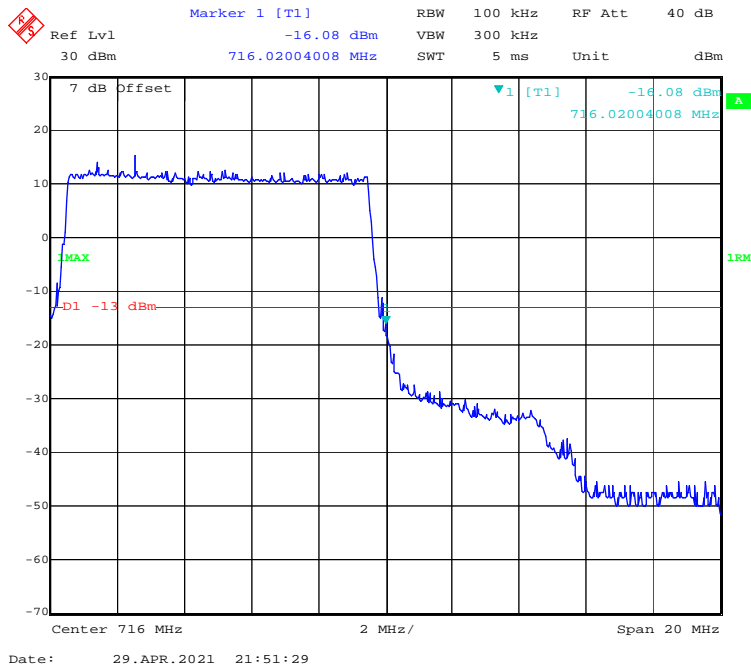


LTE Band 25:


QPSK (1.4 MHz, FULL RB) - Left Band Edge

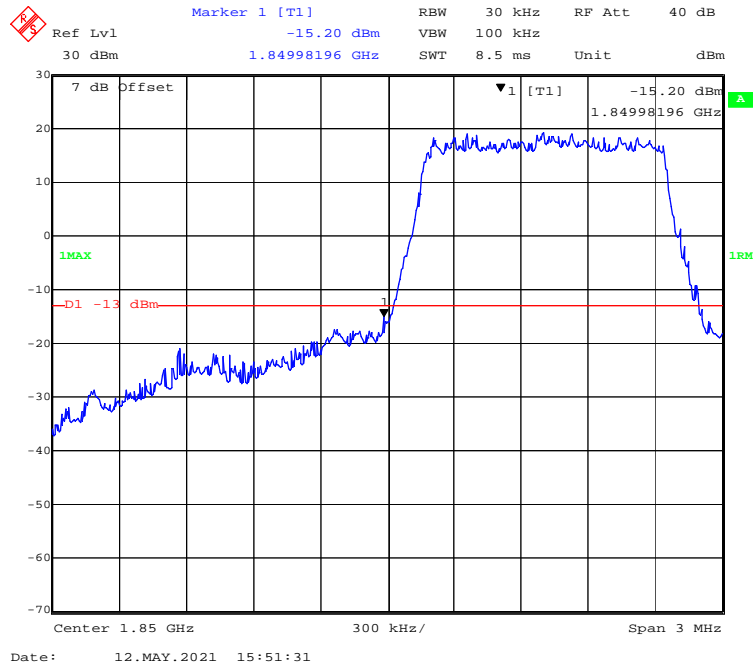


QPSK (1.4 MHz, FULL RB) - Right Band Edge

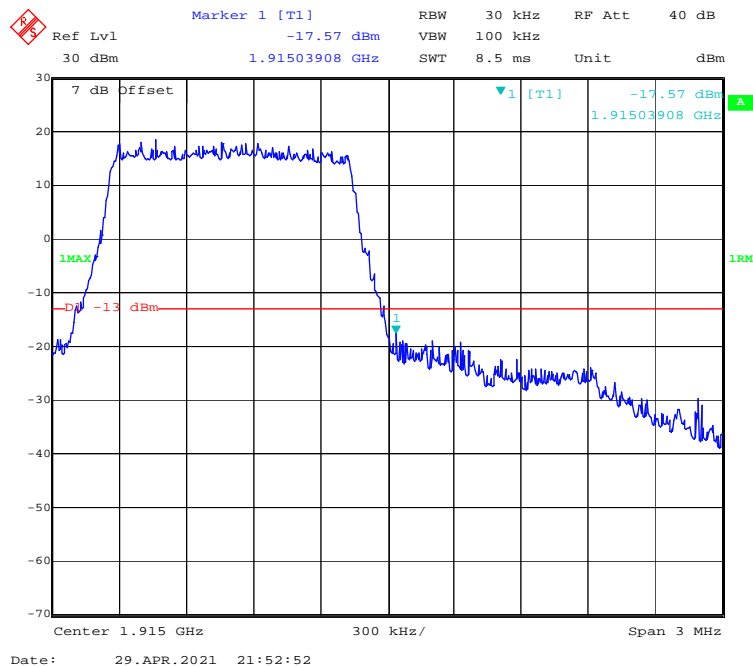


QPSK (3 MHz, FULL RB) - Left Band Edge

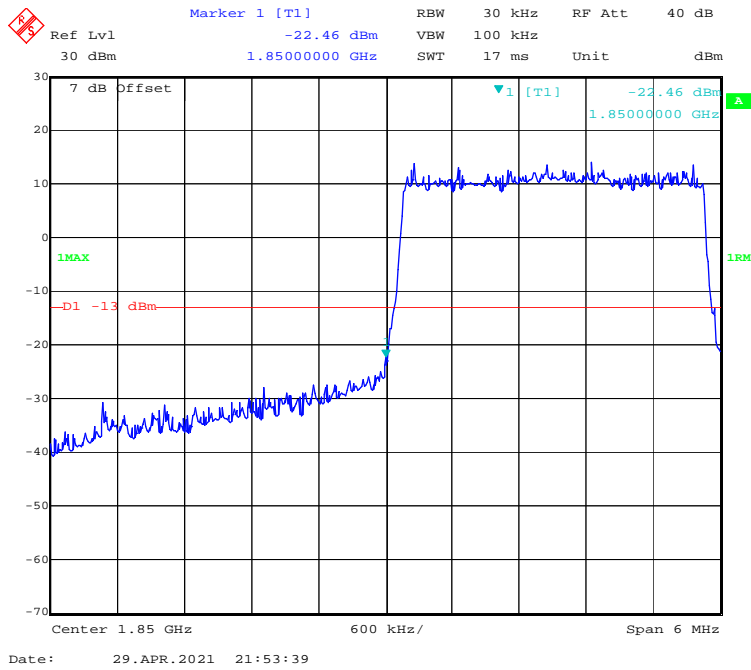


QPSK (3 MHz, FULL RB) - Right Band Edge

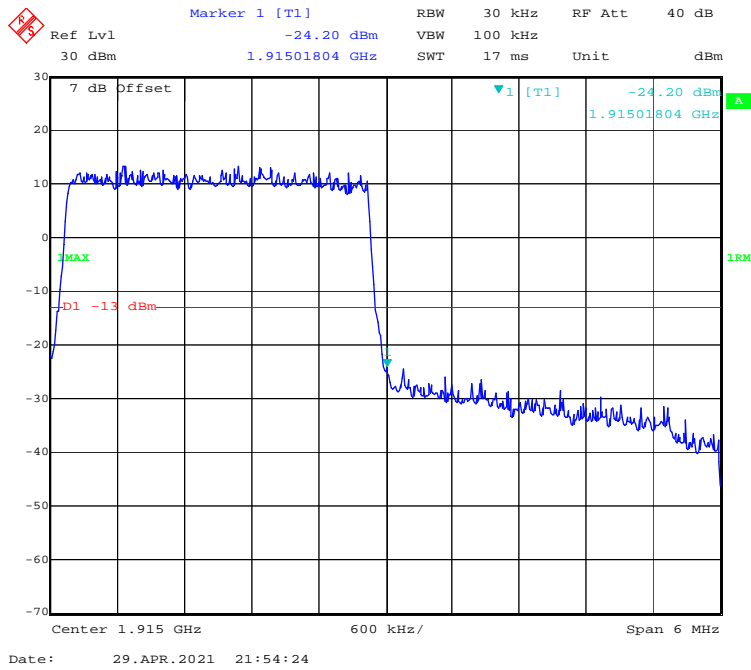


QPSK (5 MHz, FULL RB) - Left Band Edge

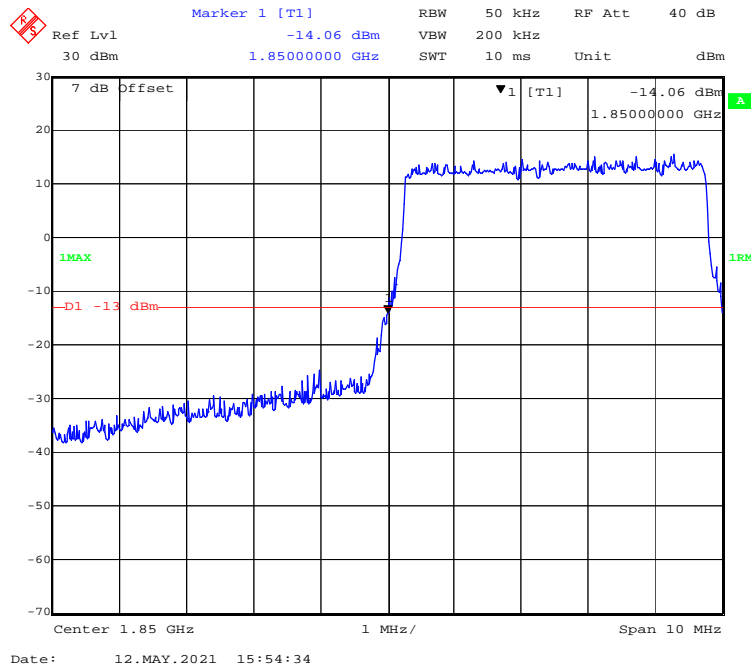


QPSK (5 MHz, FULL RB) - Right Band Edge

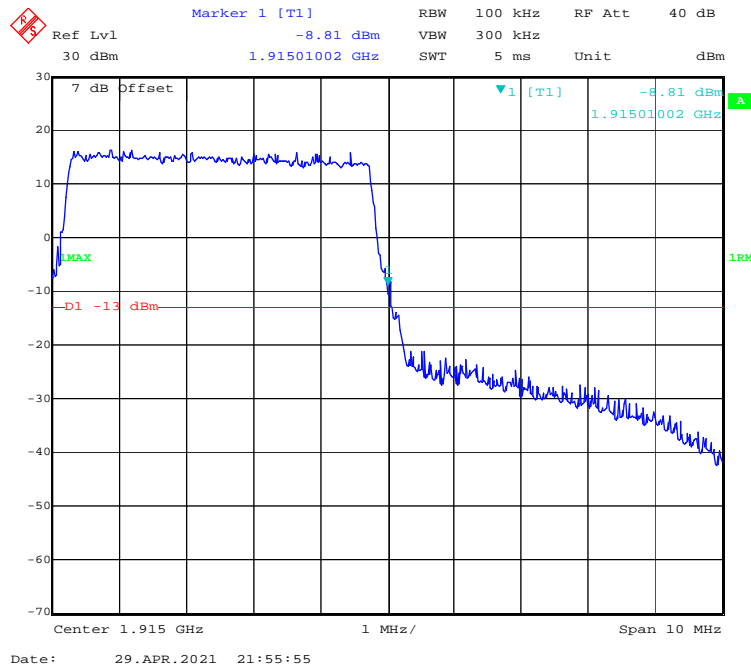


QPSK (10 MHz, FULL RB) - Left Band Edge

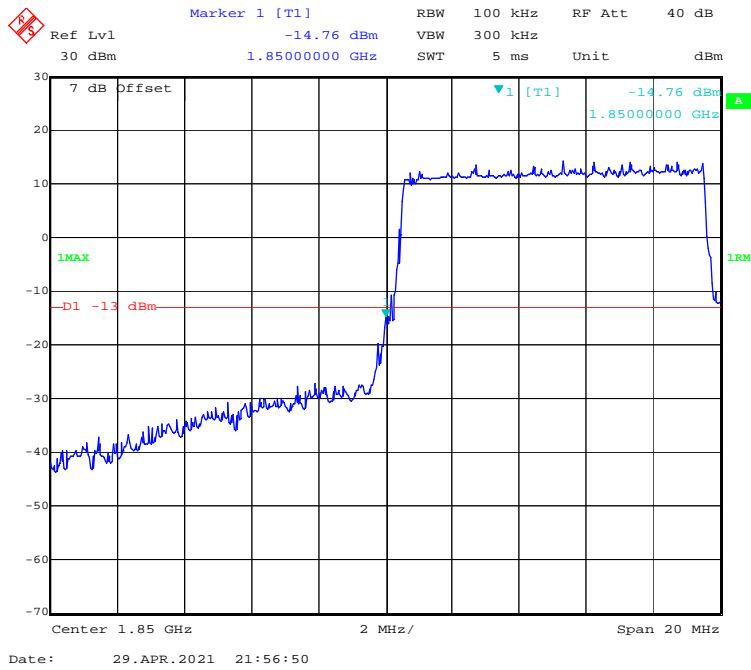


QPSK (10 MHz, FULL RB) - Right Band Edge

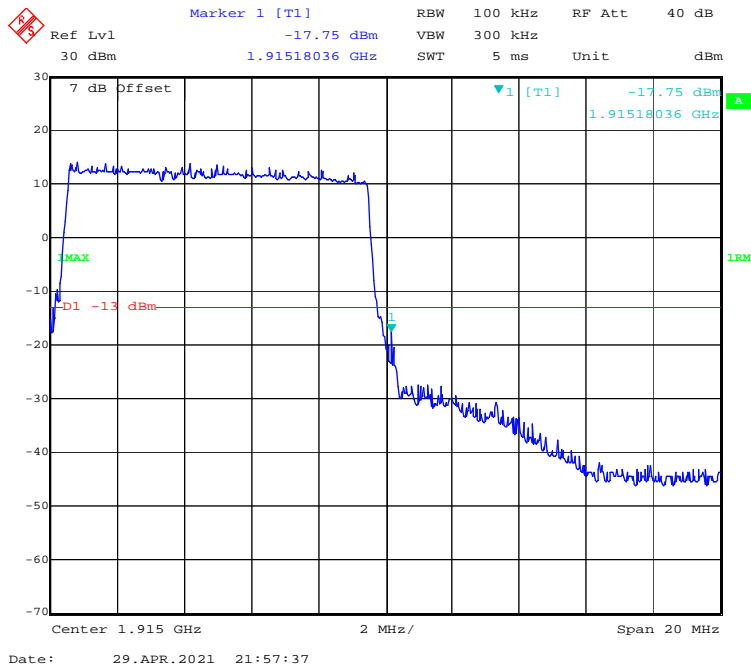


QPSK (15 MHz, FULL RB) - Left Band Edge

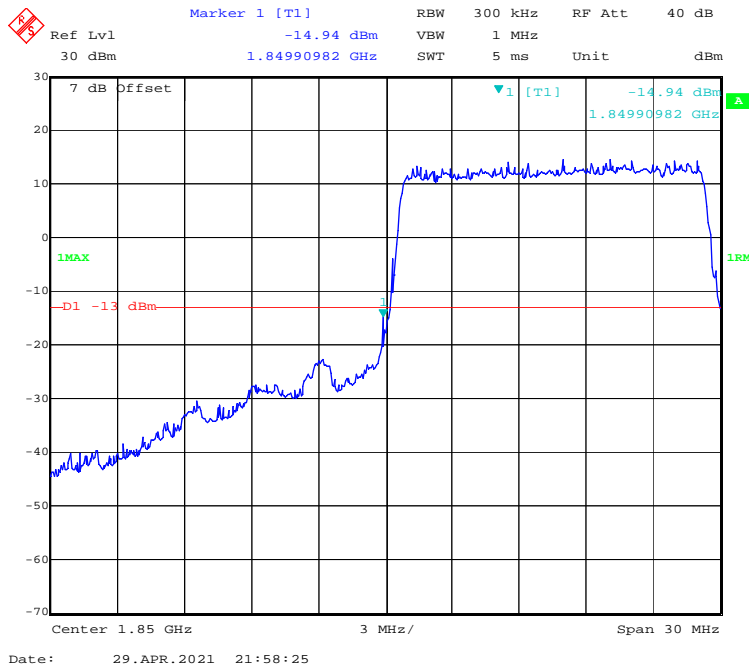


QPSK (15 MHz, FULL RB) - Right Band Edge

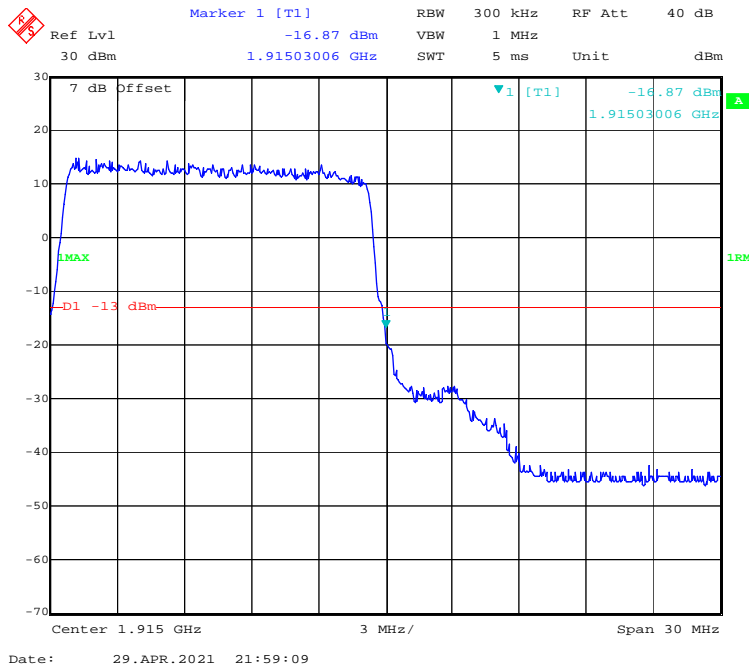


QPSK (20 MHz, FULL RB) - Left Band Edge

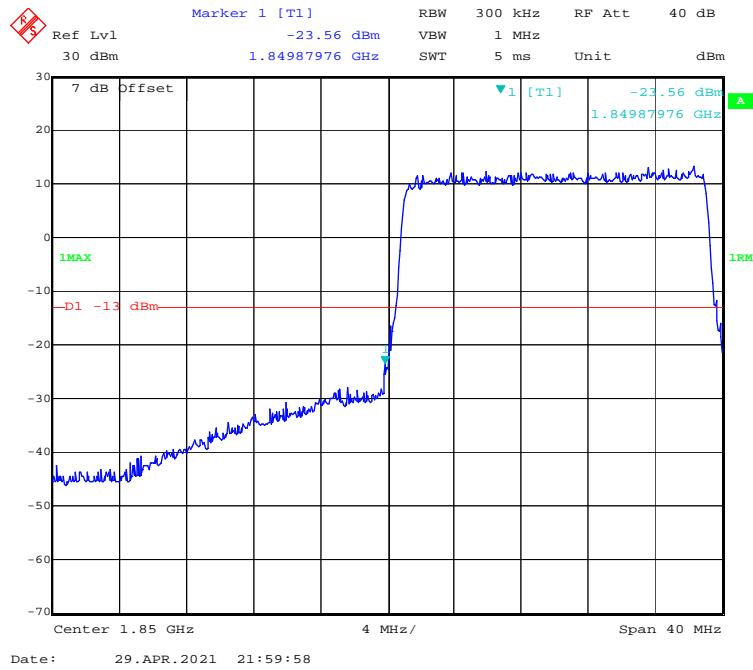


QPSK (20 MHz, FULL RB) - Right Band Edge

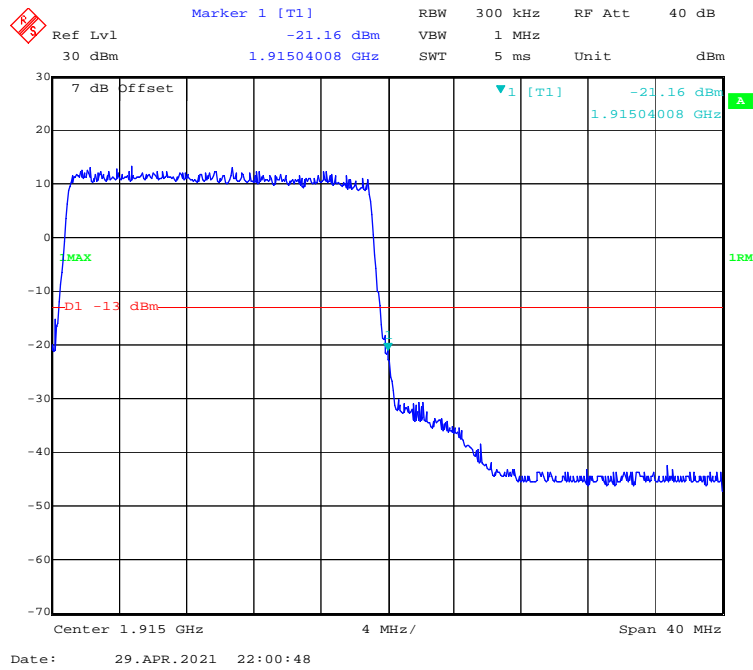


16-QAM (1.4 MHz, FULL RB) - Left Band Edge

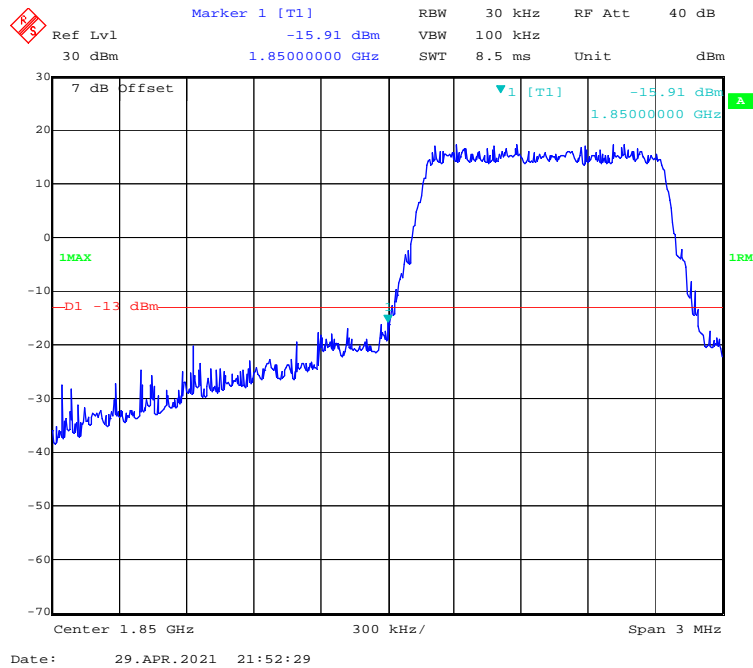


16-QAM (1.4 MHz, FULL RB) - Right Band Edge

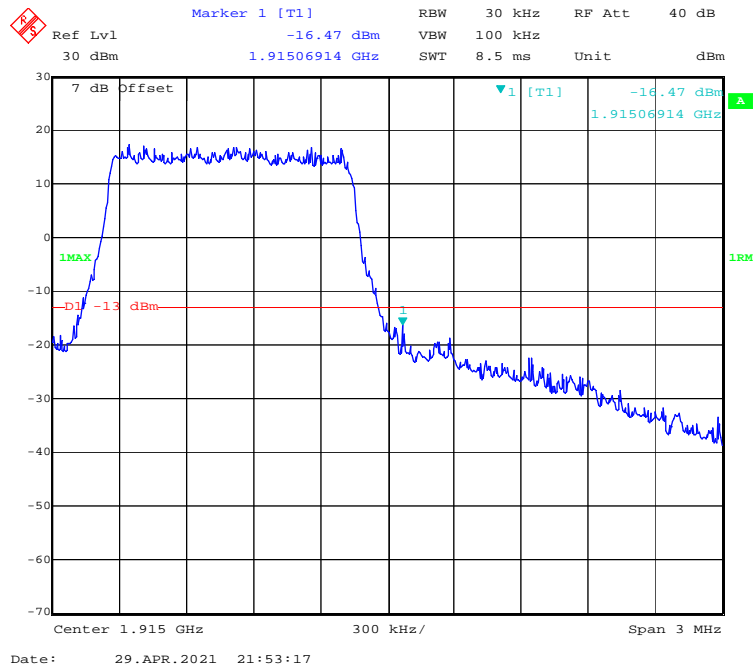


16-QAM (3 MHz, FULL RB) - Left Band Edge

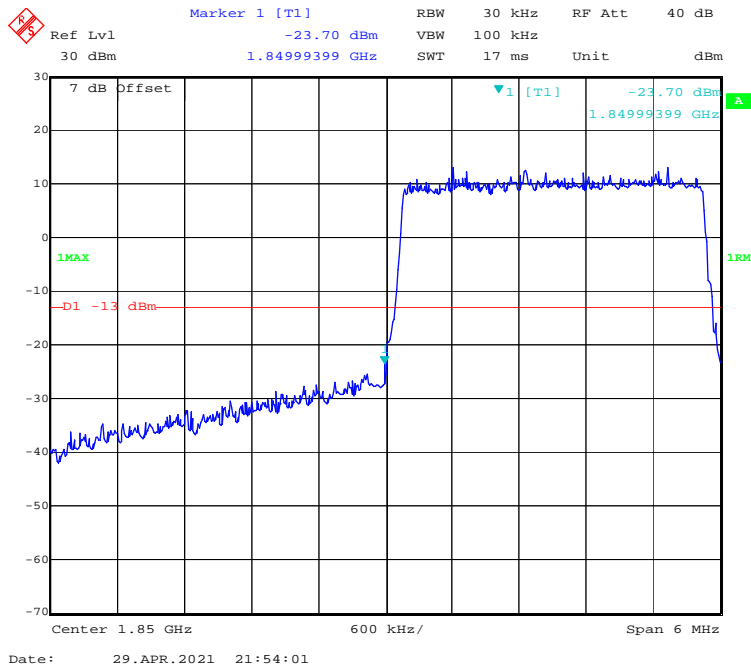


16-QAM (3 MHz, FULL RB) - Right Band Edge

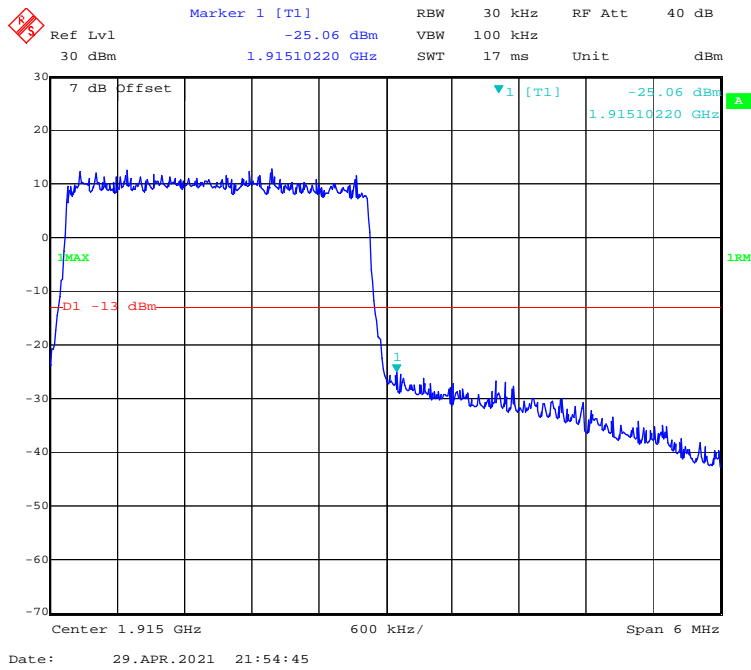


16-QAM (5 MHz, FULL RB) - Left Band Edge

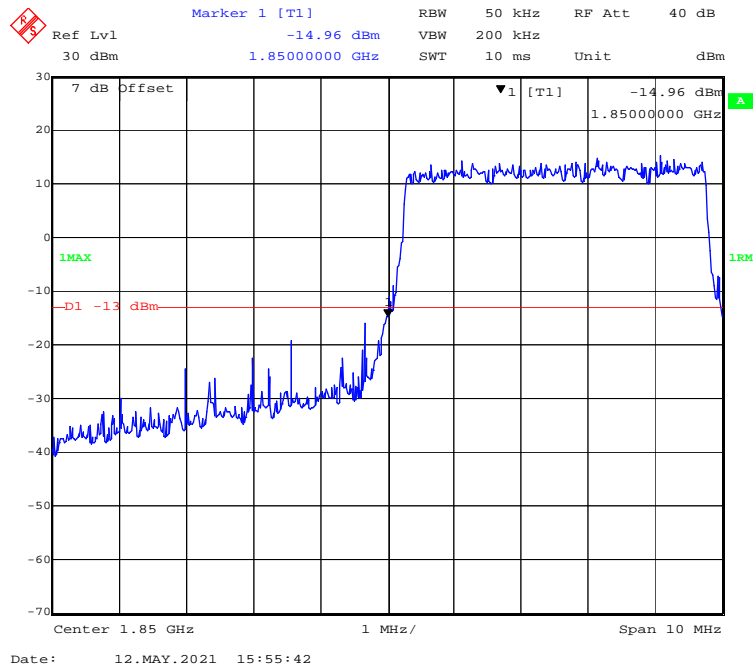


16-QAM (5 MHz, FULL RB) - Right Band Edge

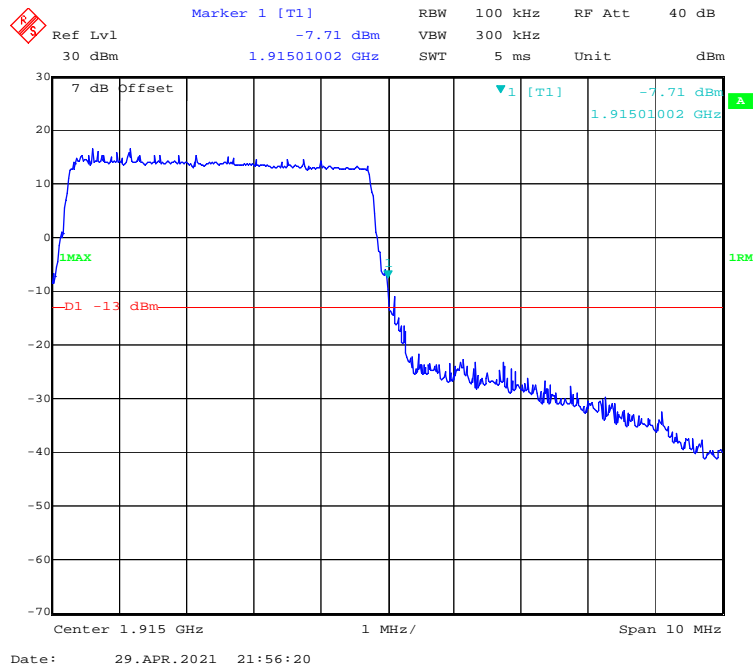


16-QAM (10 MHz, FULL RB) - Left Band Edge

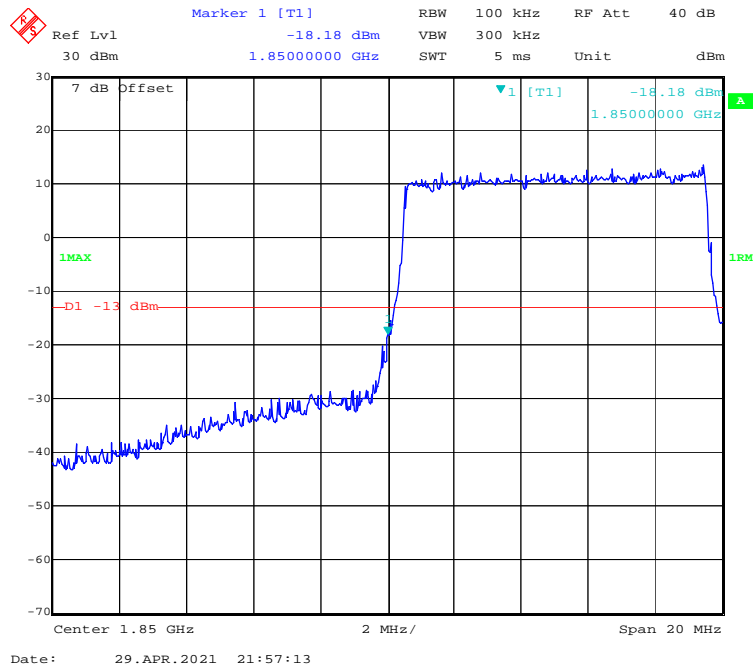


16-QAM (10 MHz, FULL RB) - Right Band Edge

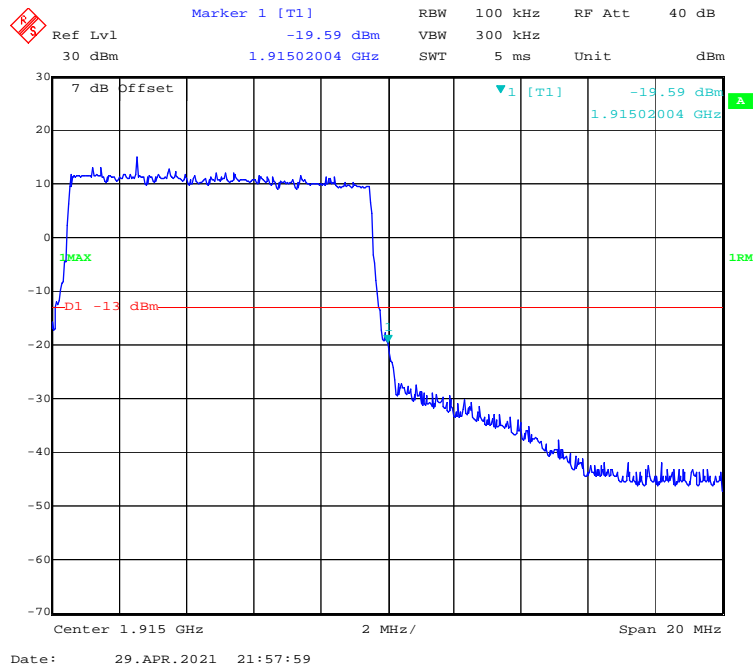


16-QAM (15 MHz, FULL RB) - Left Band Edge

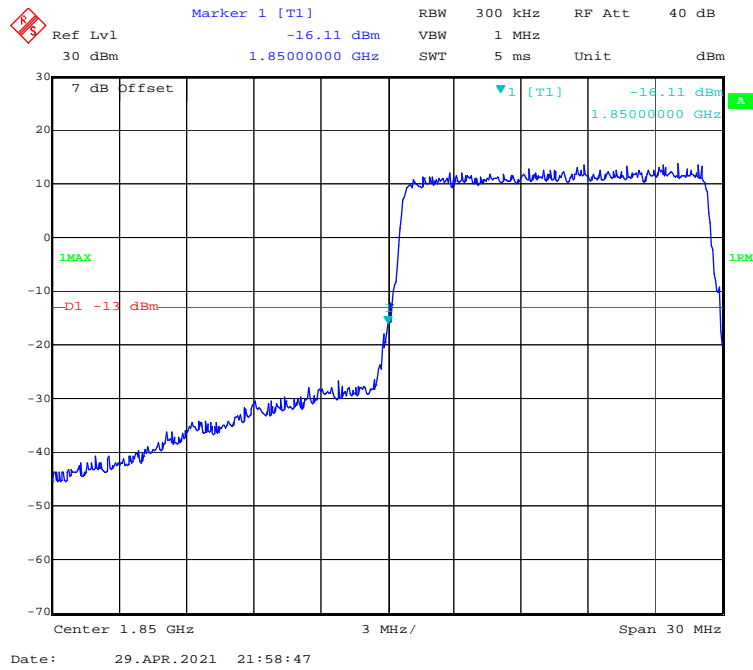


16-QAM (15 MHz, FULL RB) - Right Band Edge

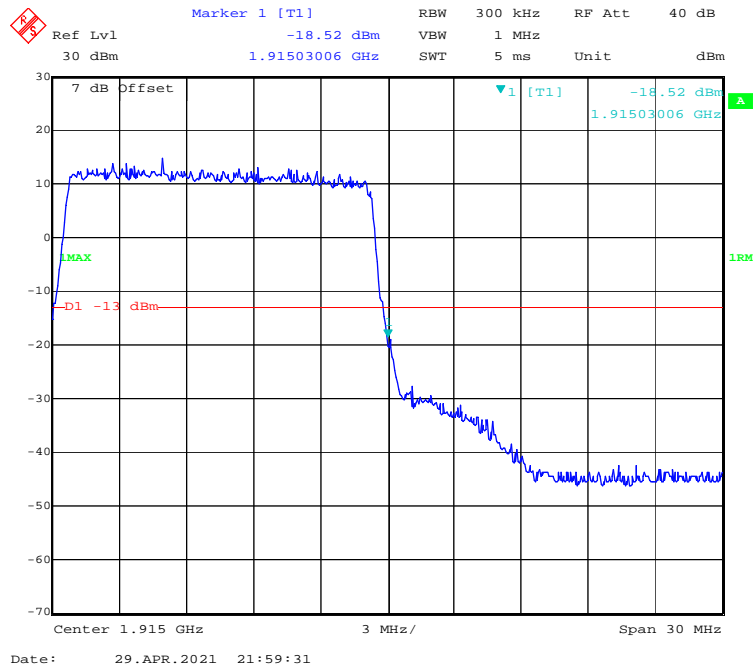

16-QAM (20 MHz, FULL RB) - Left Band Edge

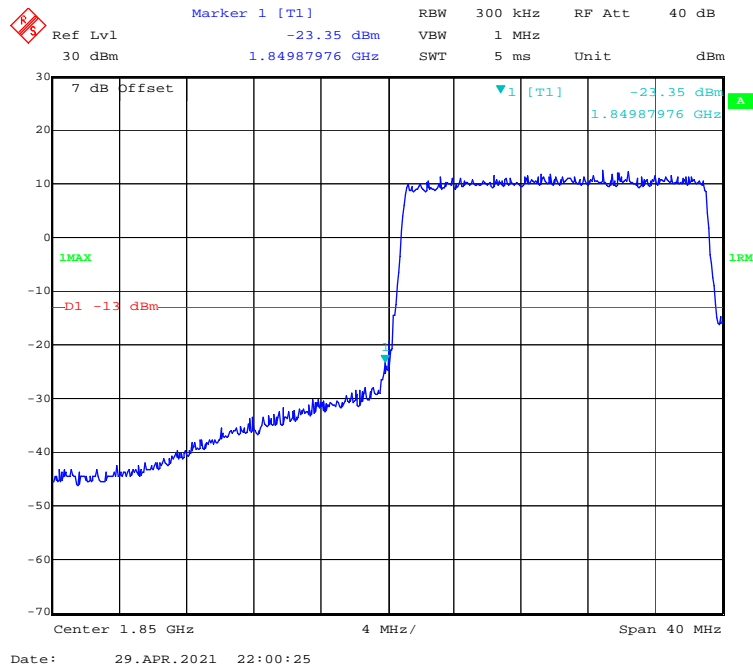


16-QAM (20 MHz, FULL RB) - Right Band Edge

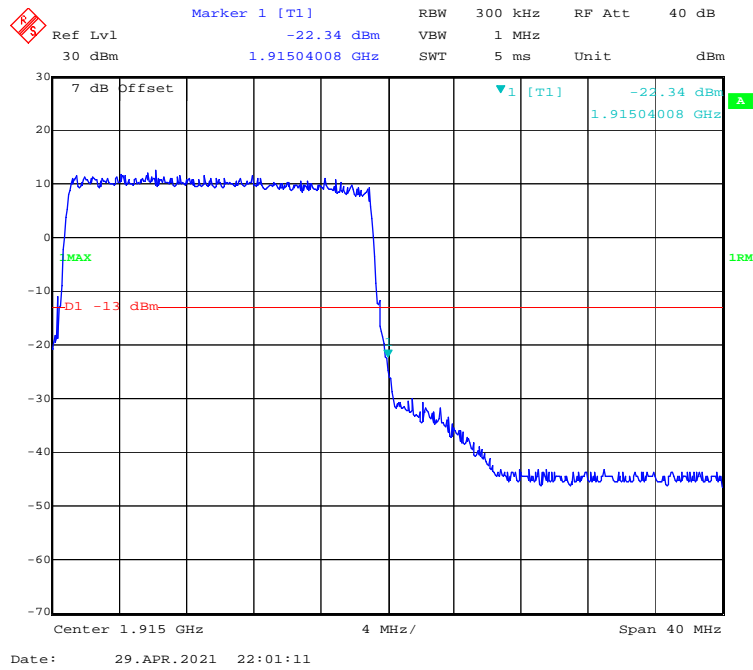


LTE Band 26:


QPSK (1.4 MHz, FULL RB) - Left Band Edge

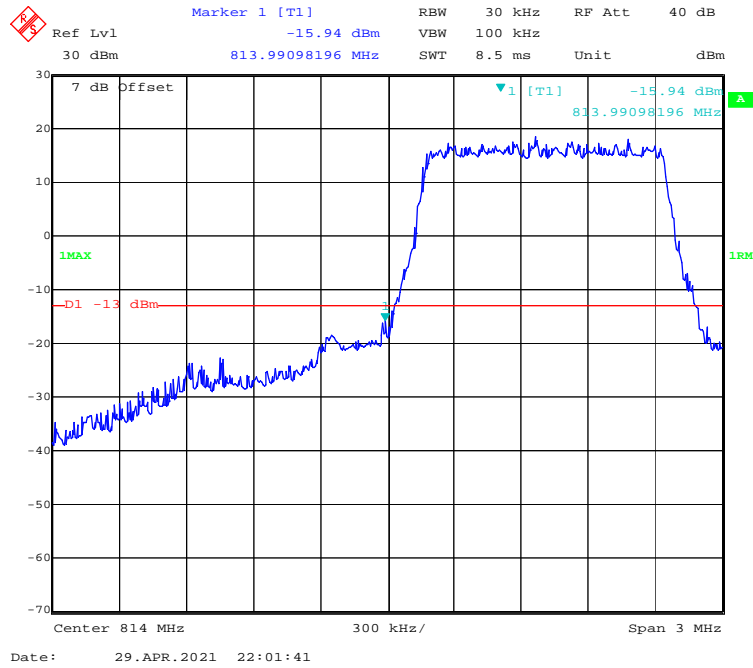


QPSK (1.4 MHz, FULL RB) - Right Band Edge

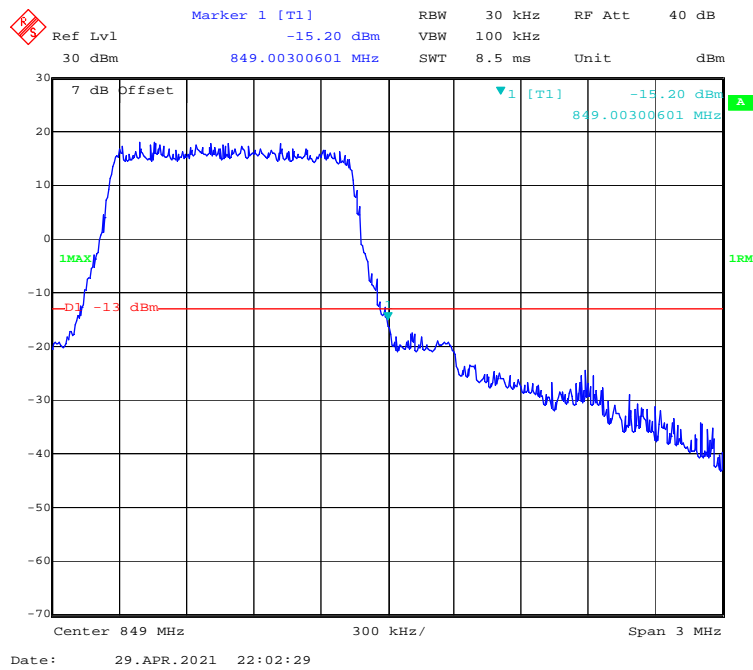


QPSK (3 MHz, FULL RB) - Left Band Edge

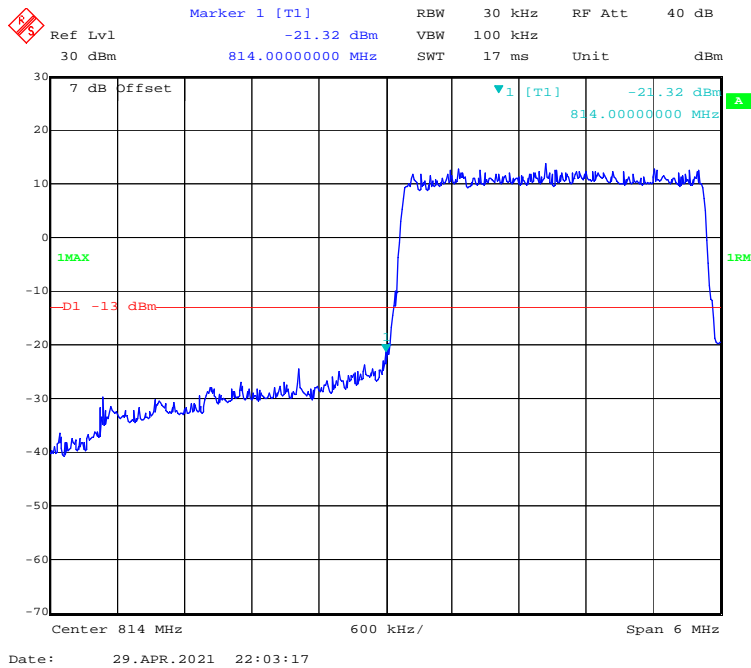


QPSK (3 MHz, FULL RB) - Right Band Edge

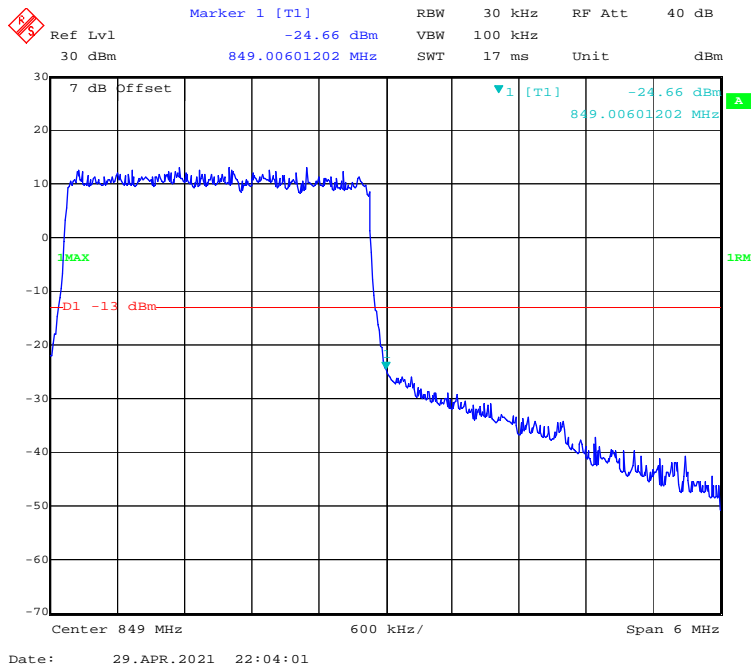


QPSK (5 MHz, FULL RB) - Left Band Edge

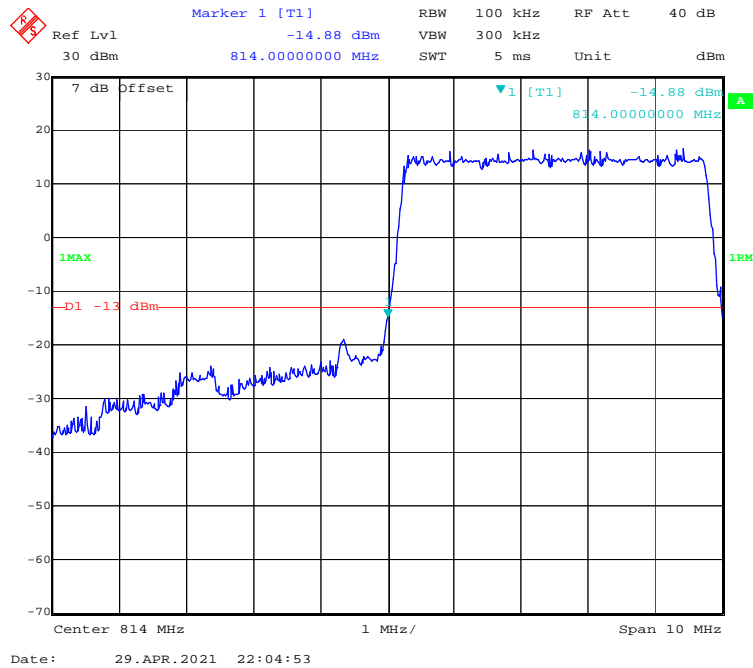


QPSK (5 MHz, FULL RB) - Right Band Edge

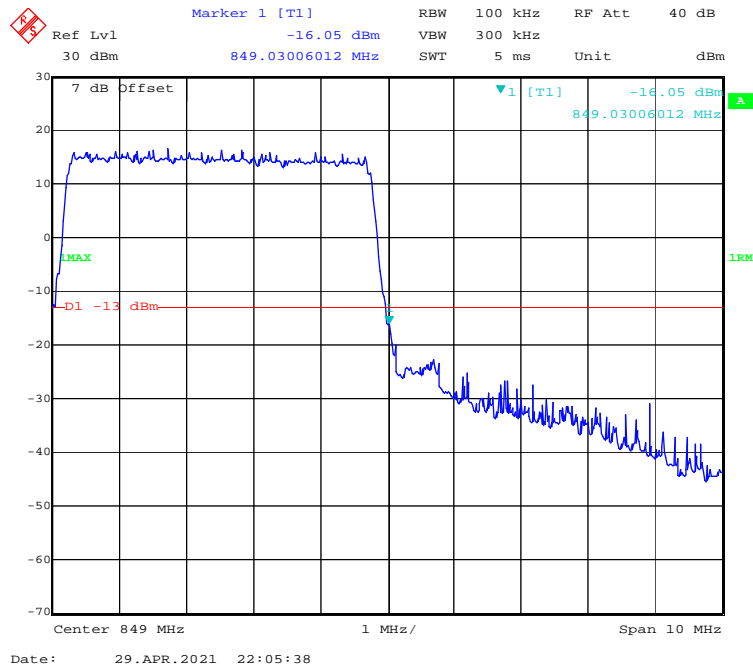


QPSK (10 MHz, FULL RB) - Left Band Edge

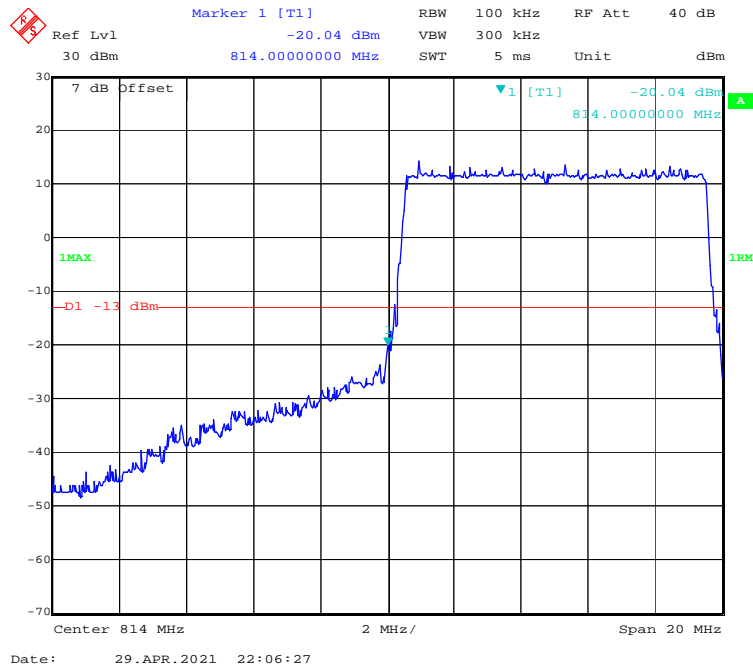


QPSK (10 MHz, FULL RB) - Right Band Edge

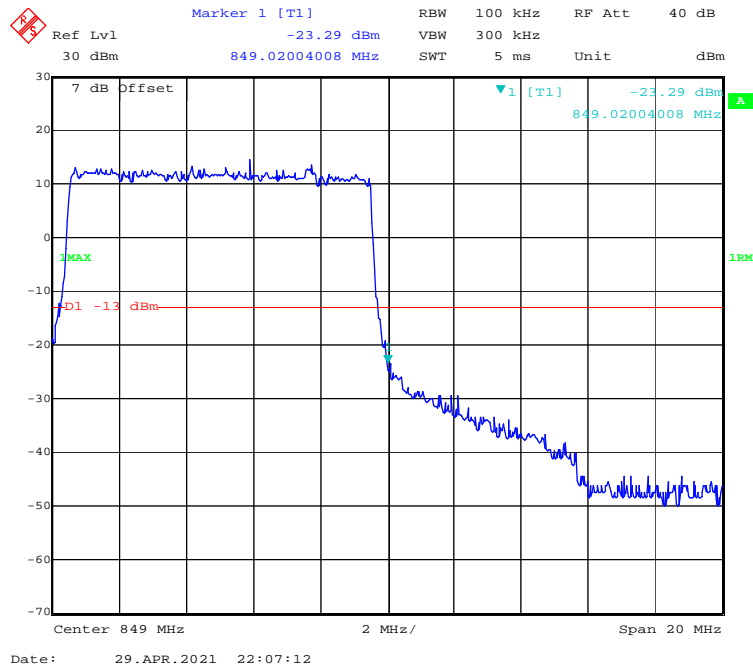


QPSK (15 MHz, FULL RB) - Left Band Edge

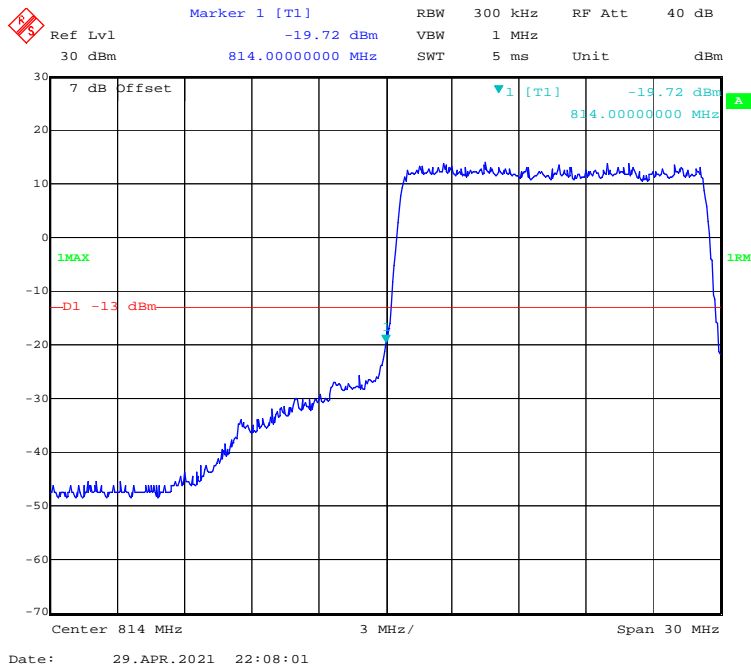


QPSK (15 MHz, FULL RB) - Right Band Edge

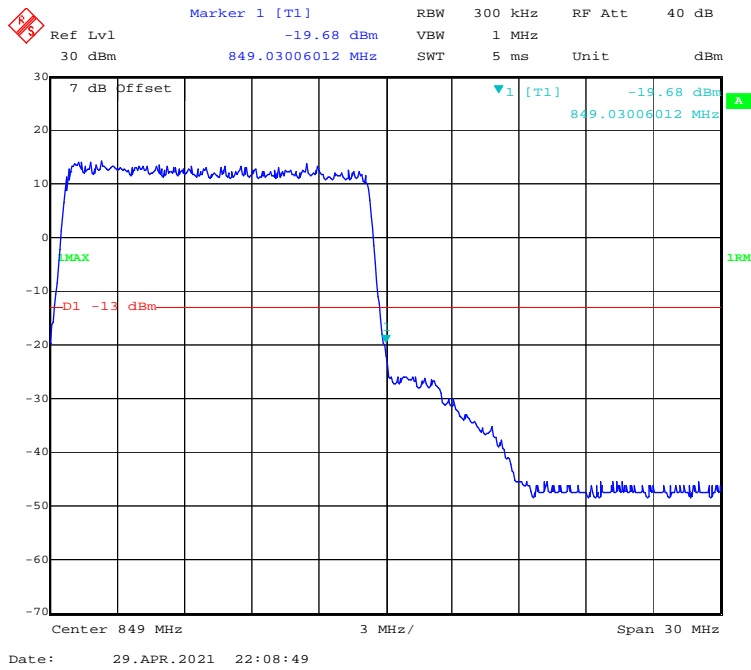


16-QAM (1.4 MHz, FULL RB) - Left Band Edge

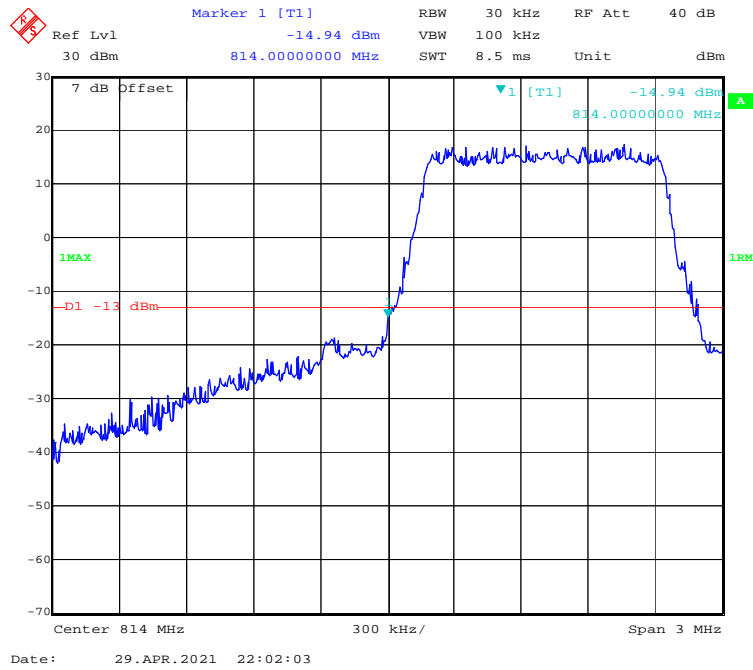


16-QAM (1.4 MHz, FULL RB) - Right Band Edge

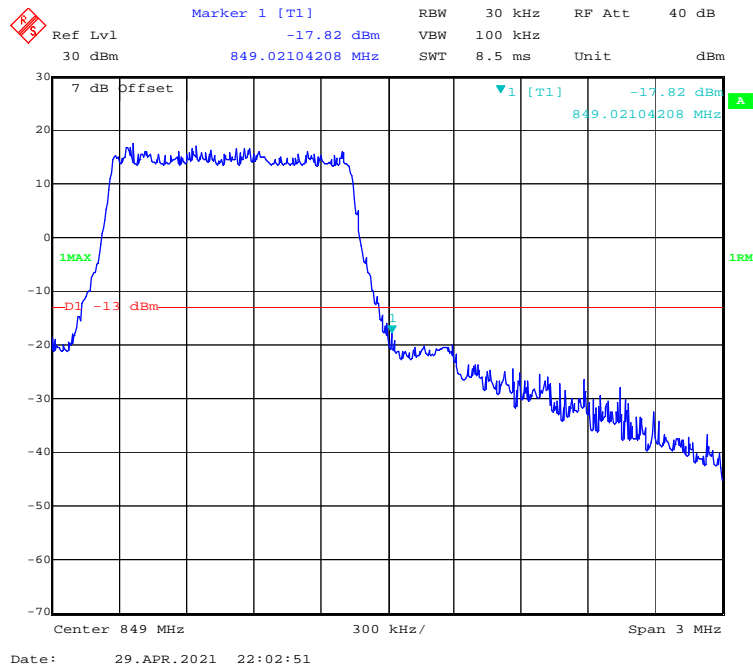


16-QAM (3 MHz, FULL RB) - Left Band Edge

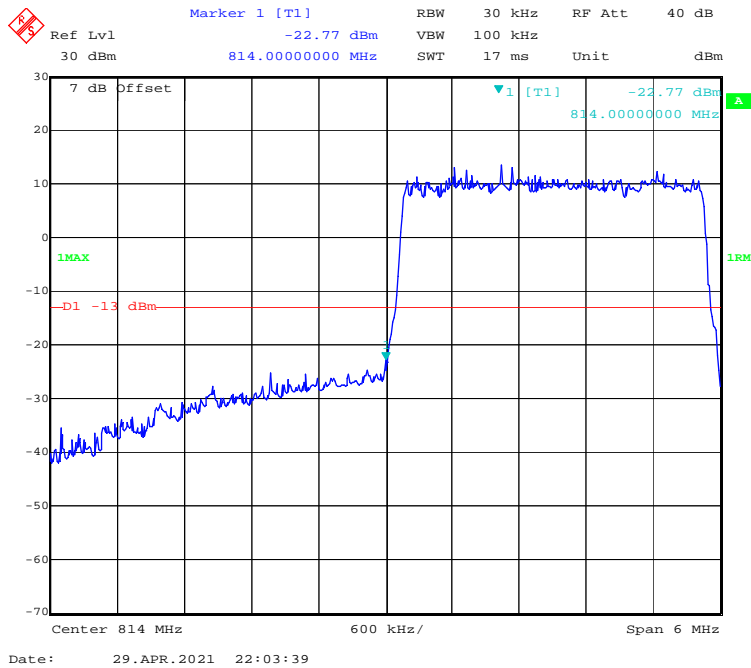


16-QAM (3 MHz, FULL RB) - Right Band Edge

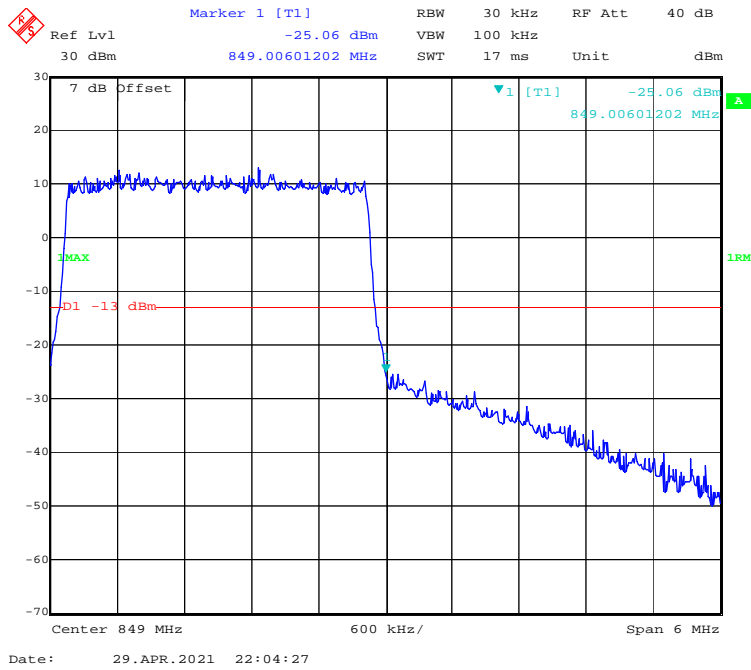


16-QAM (5 MHz, FULL RB) - Left Band Edge

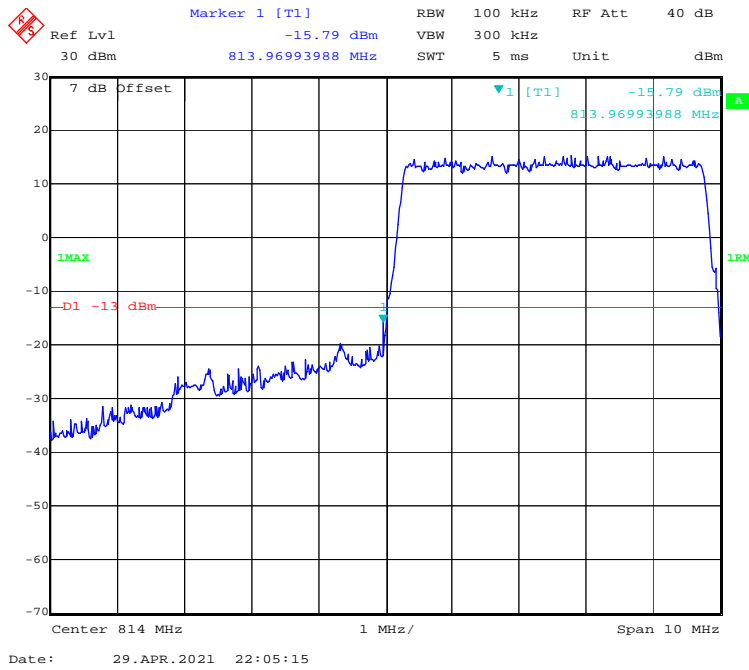


16-QAM (5 MHz, FULL RB) - Right Band Edge

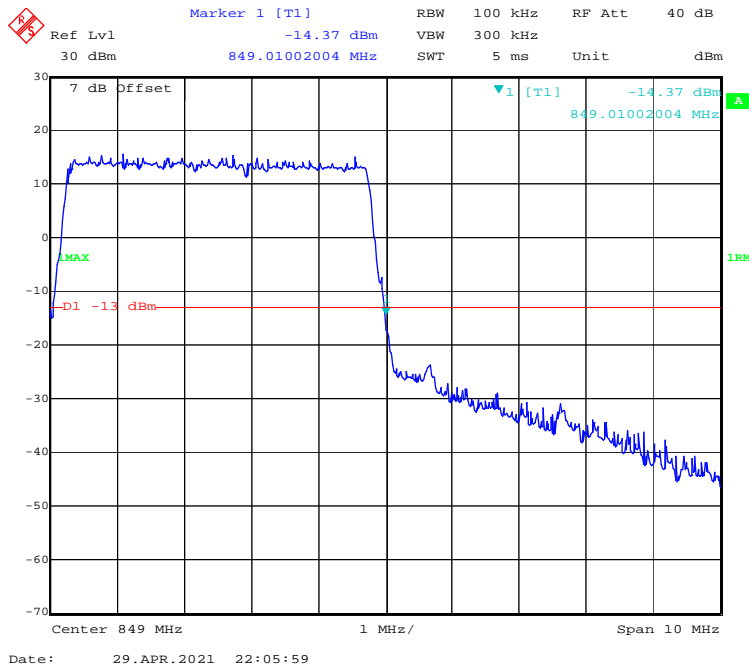


16-QAM (10 MHz, FULL RB) - Left Band Edge

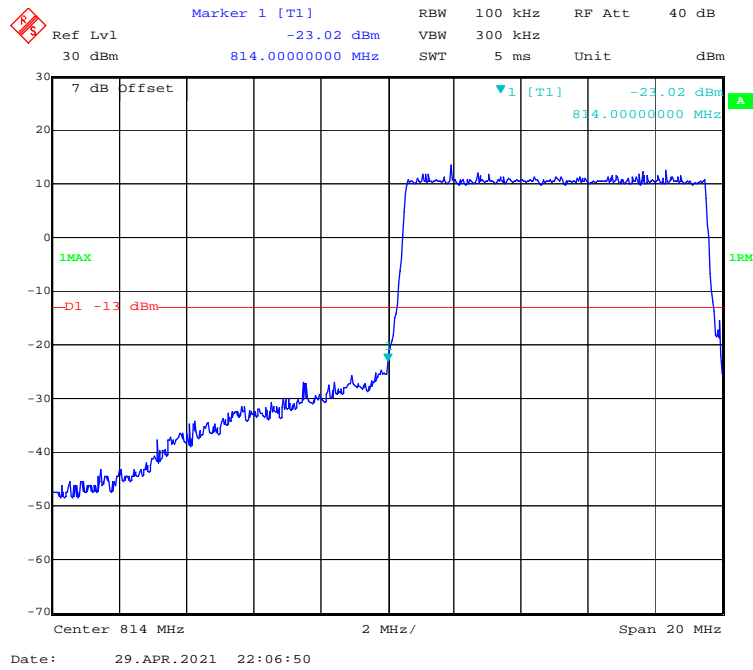


16-QAM (10 MHz, FULL RB) - Right Band Edge

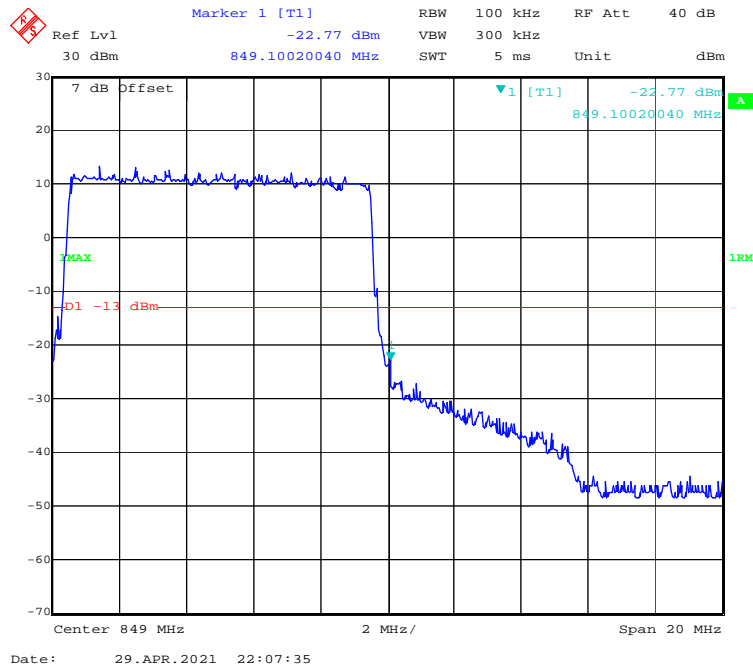

16-QAM (15 MHz, FULL RB) - Left Band Edge

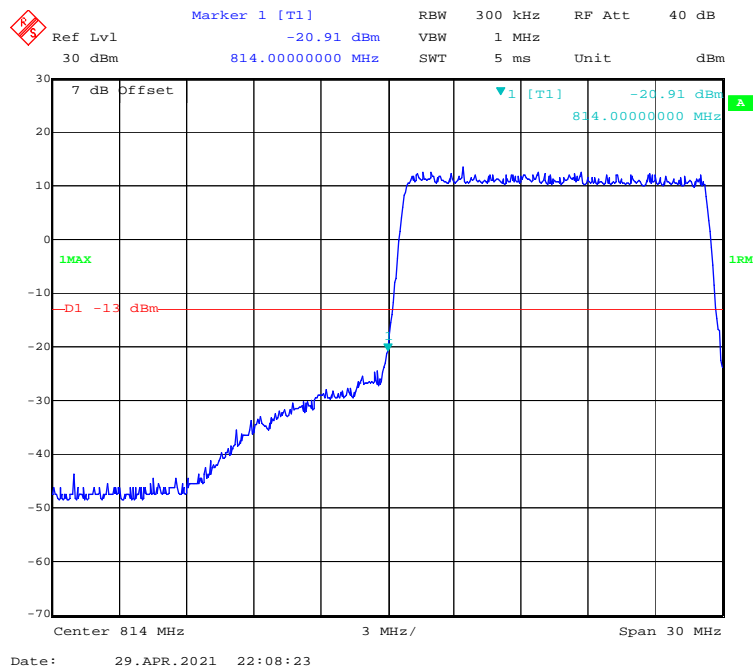


16-QAM (15 MHz, FULL RB) - Right Band Edge

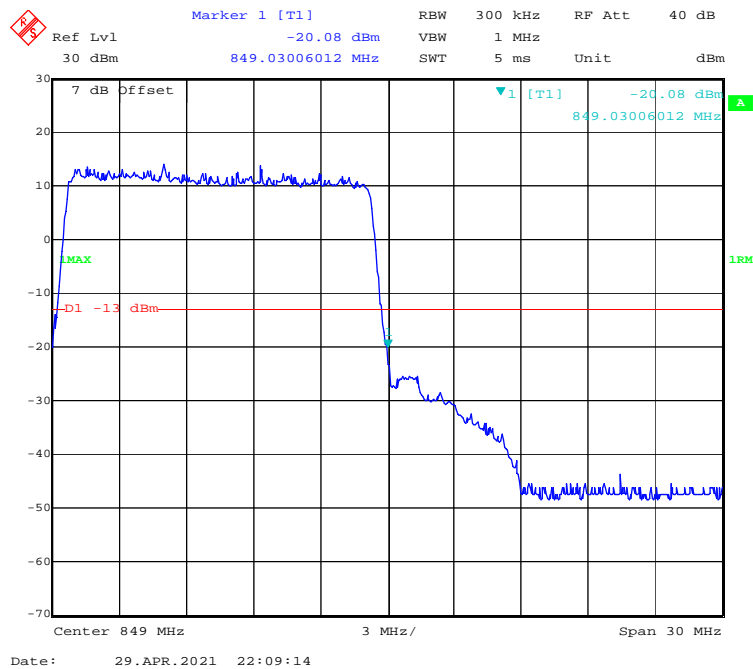


LTE Band 40(2305MHz-2315MHz):


QPSK (5.0 MHz, FULL RB) - Left Band Edge

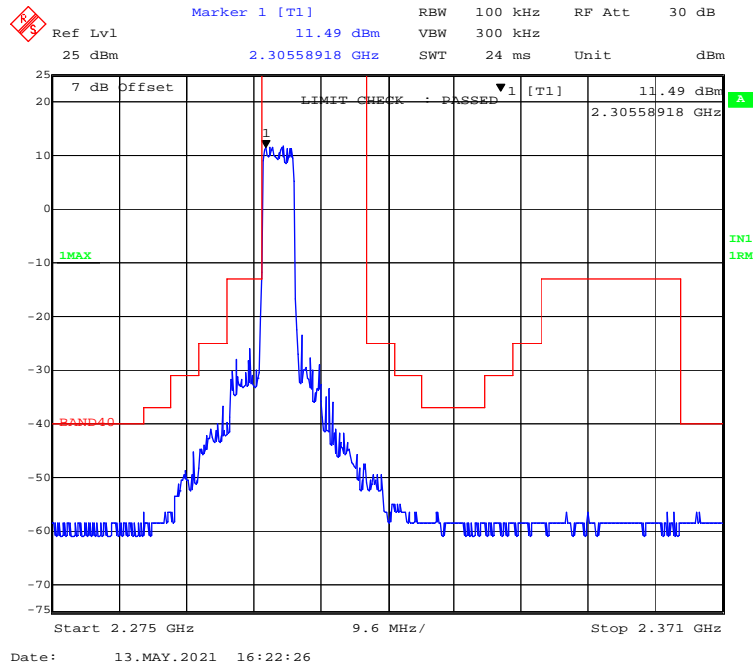


QPSK (5.0 MHz, FULL RB) - Right Band Edge

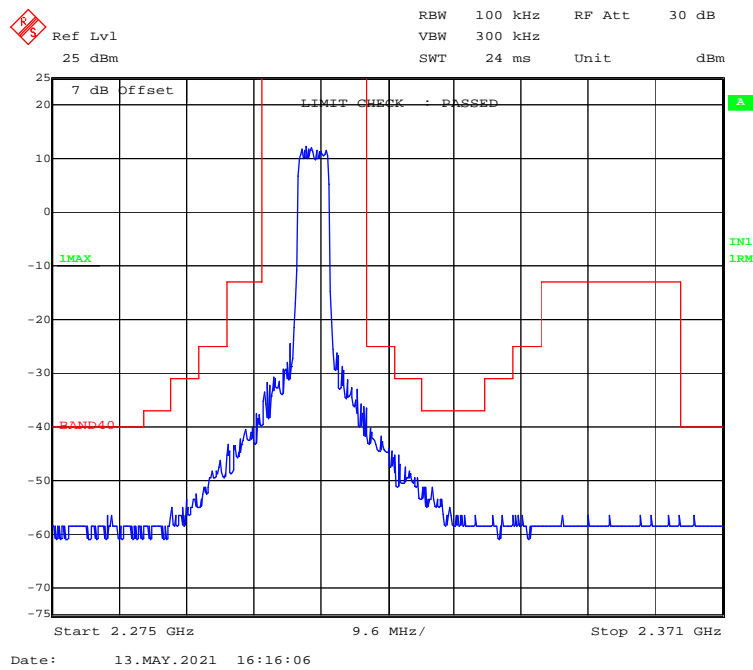


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

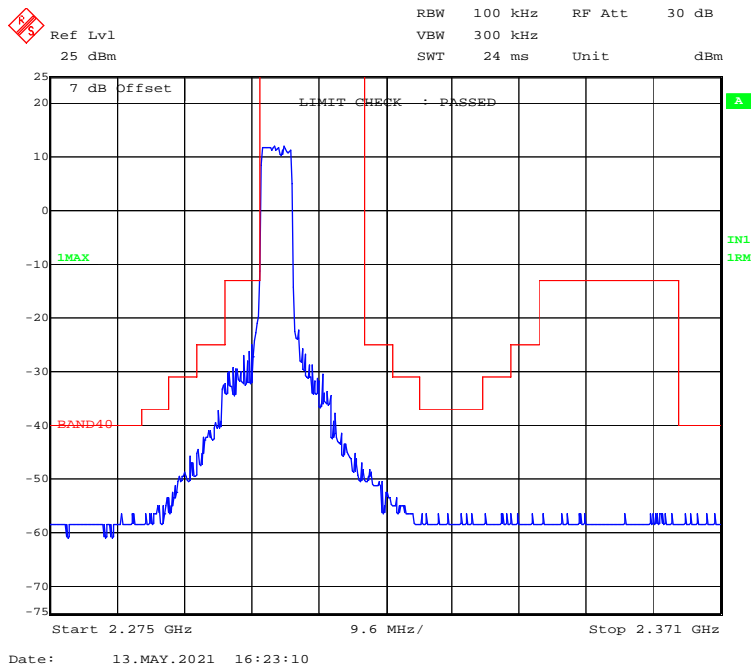


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

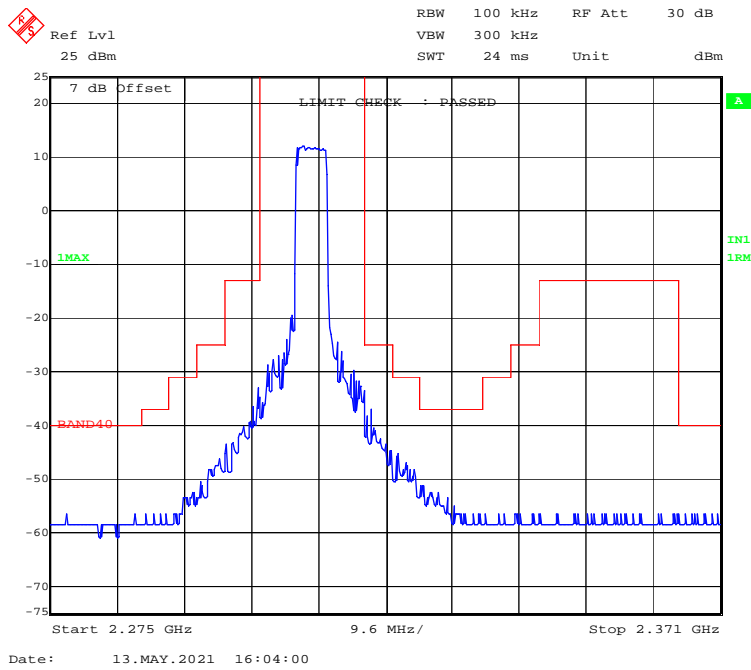

QPSK (10.0 MHz, FULL RB) - Band Edge

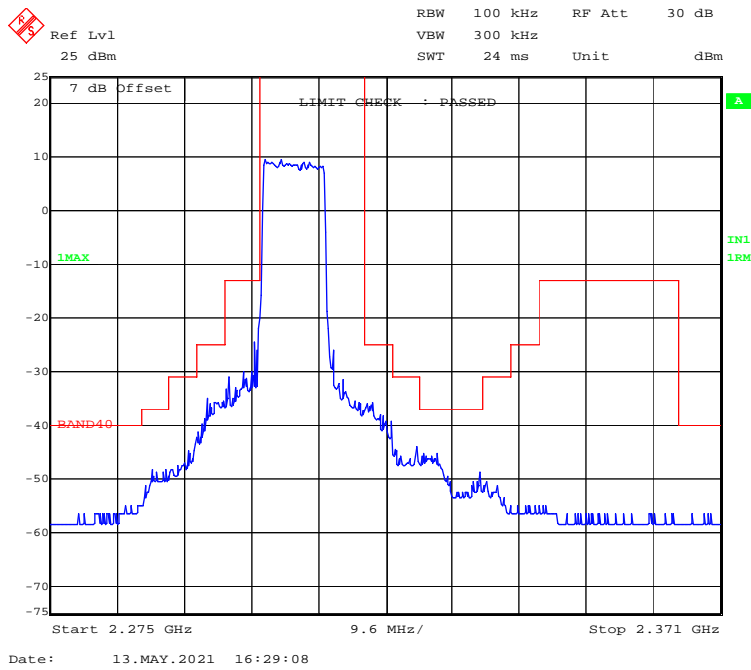


16-QAM (10.0 MHz, FULL RB) - Band Edge

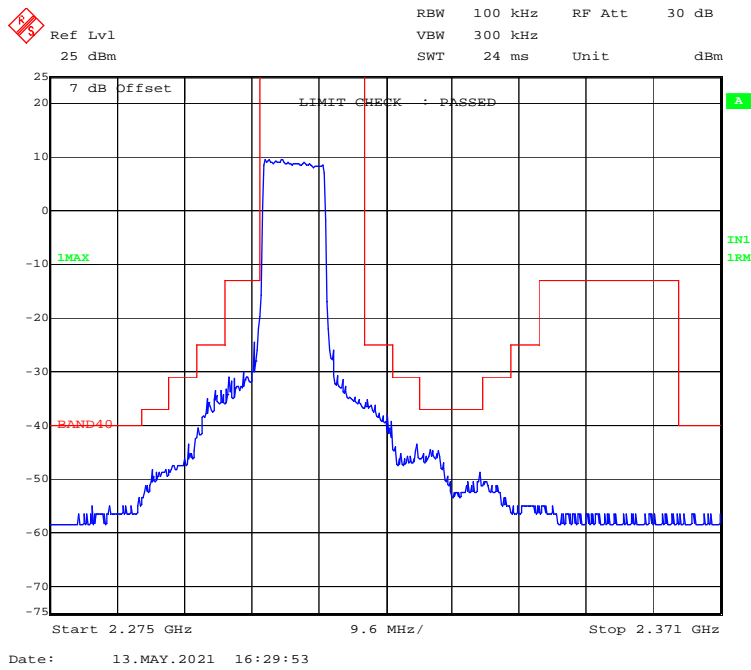


LTE Band 40(2350MHz-2360MHz):


QPSK (5.0 MHz, FULL RB) - Left Band Edge

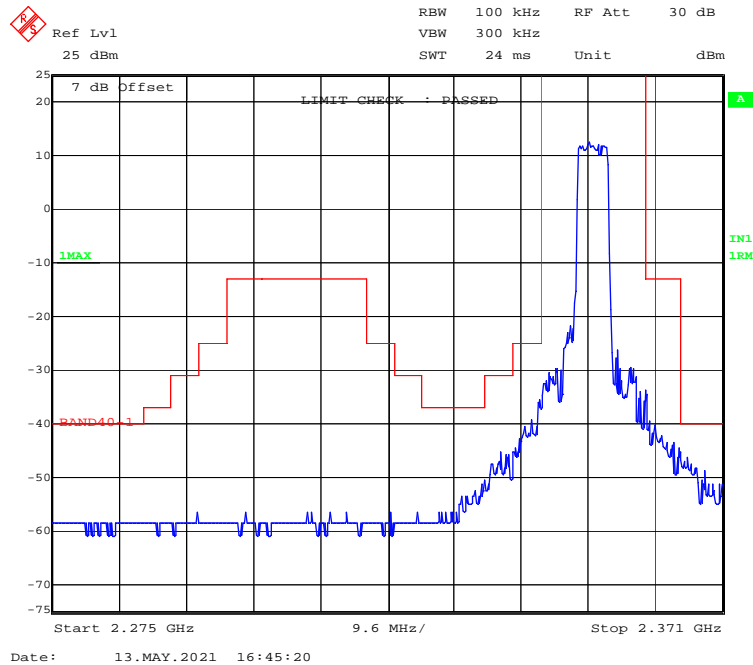


QPSK (5.0 MHz, FULL RB) - Right Band Edge

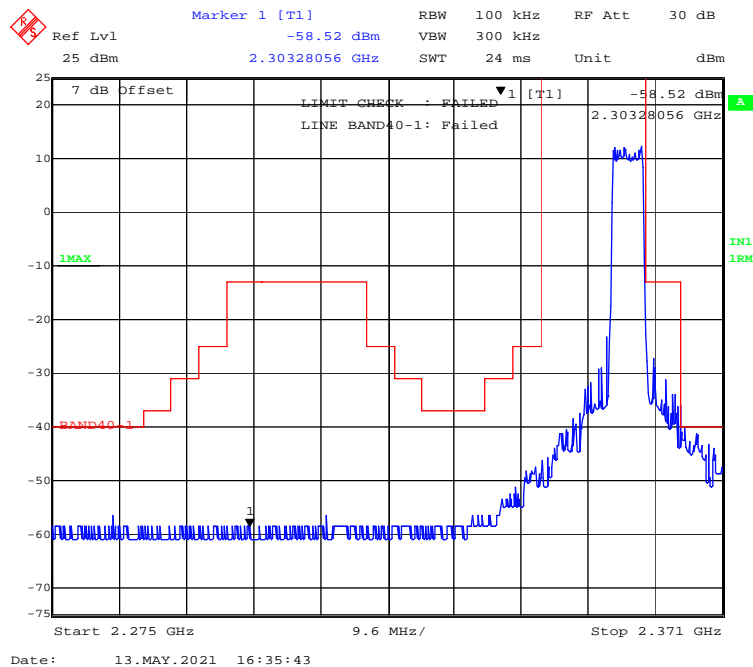

16-QAM (5.0 MHz, FULL RB) - Left Band Edge

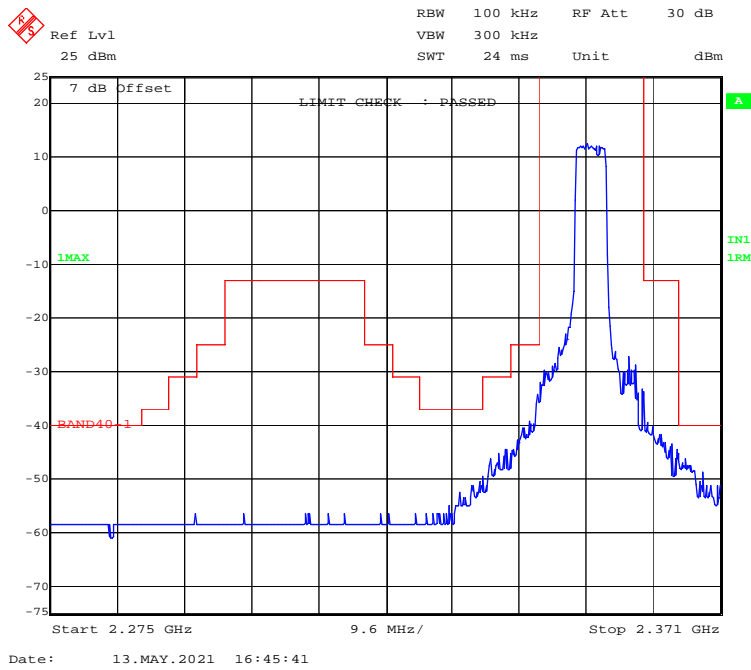


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

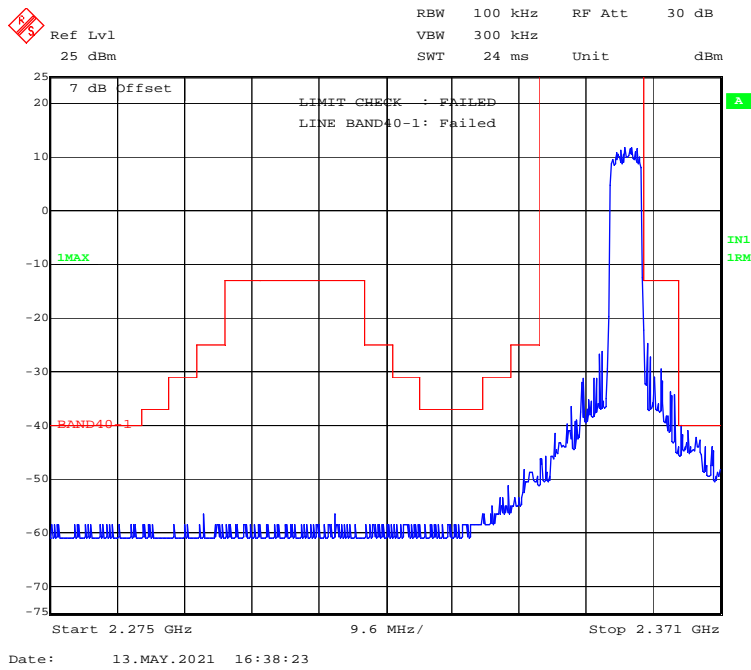

QPSK (10.0 MHz, FULL RB) - Band Edge




16-QAM (10.0 MHz, FULL RB) - Band Edge

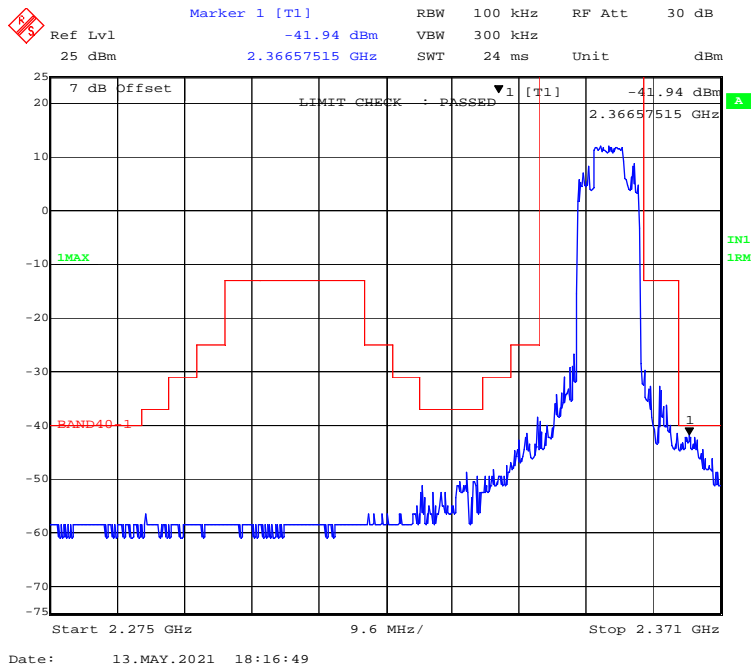


LTE Band 41:


QPSK (5.0 MHz, FULL RB) - Left Band Edge

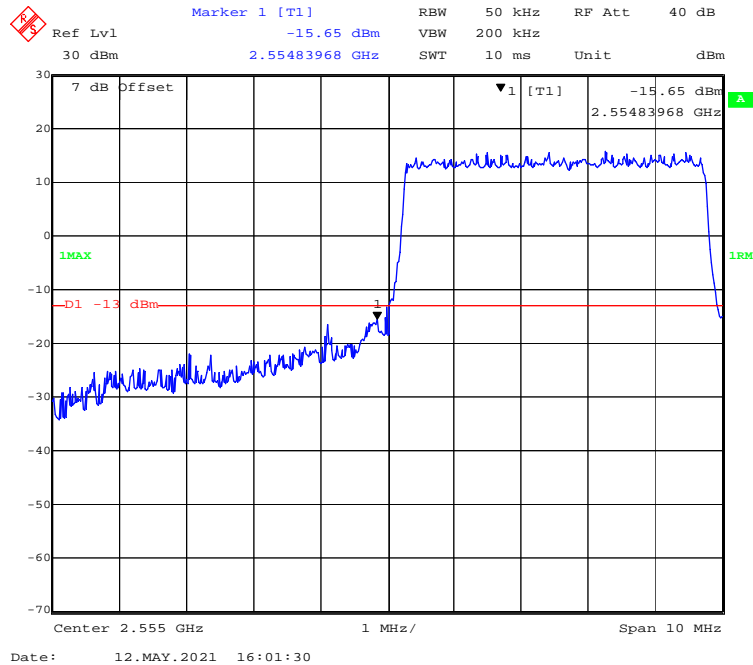


QPSK (5.0 MHz, FULL RB) - Right Band Edge

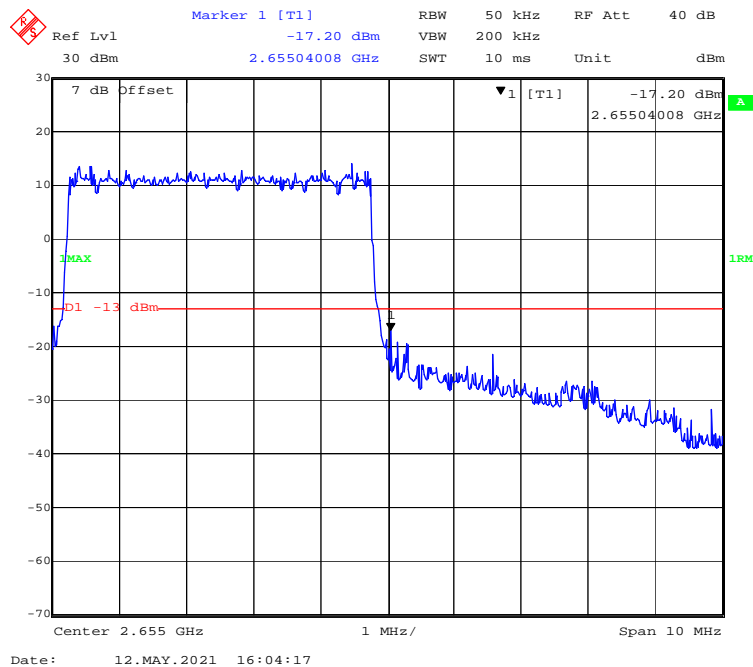


QPSK (10.0 MHz, FULL RB) - Left Band Edge

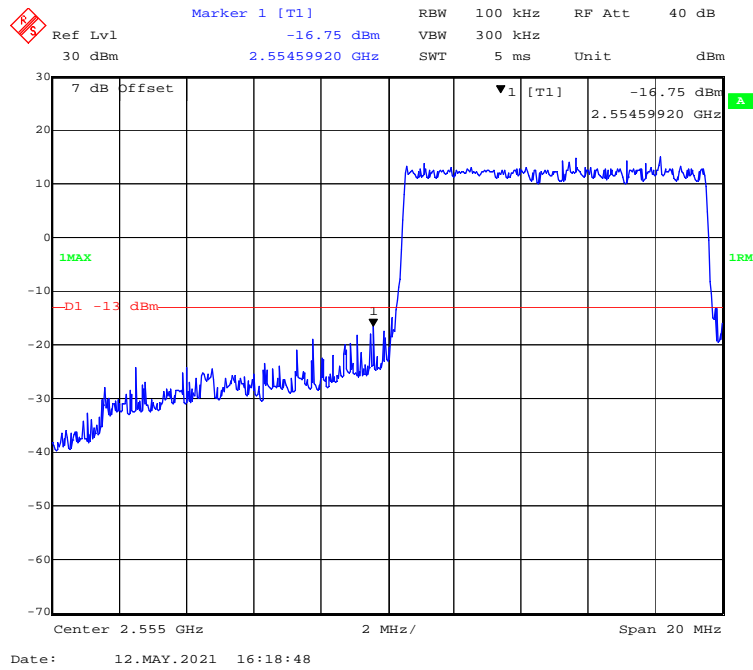


QPSK (10.0 MHz, FULL RB) - Right Band Edge

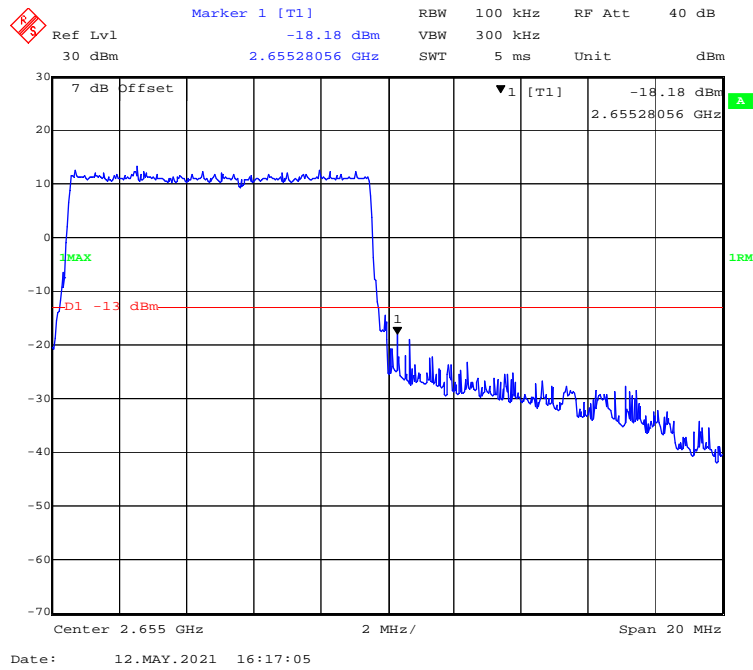


QPSK (15.0 MHz, FULL RB) - Left Band Edge

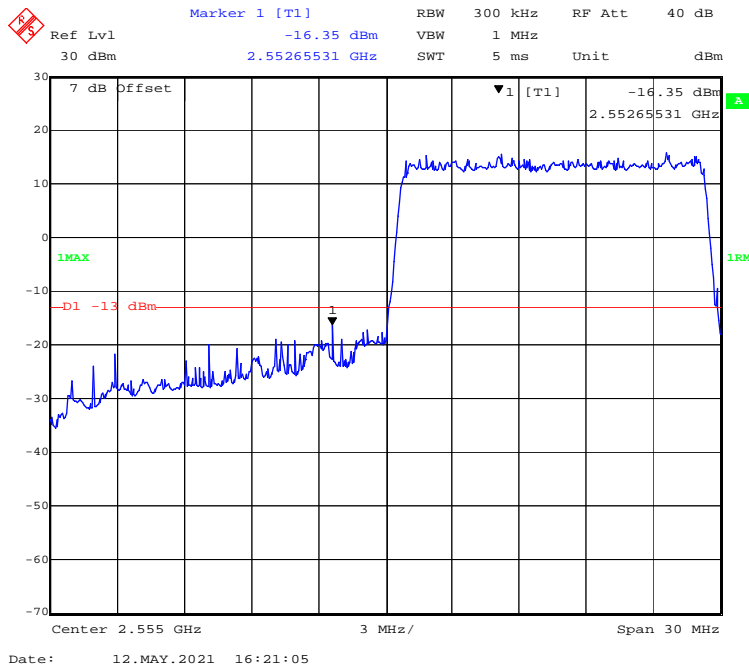


QPSK (15.0 MHz, FULL RB) - Right Band Edge

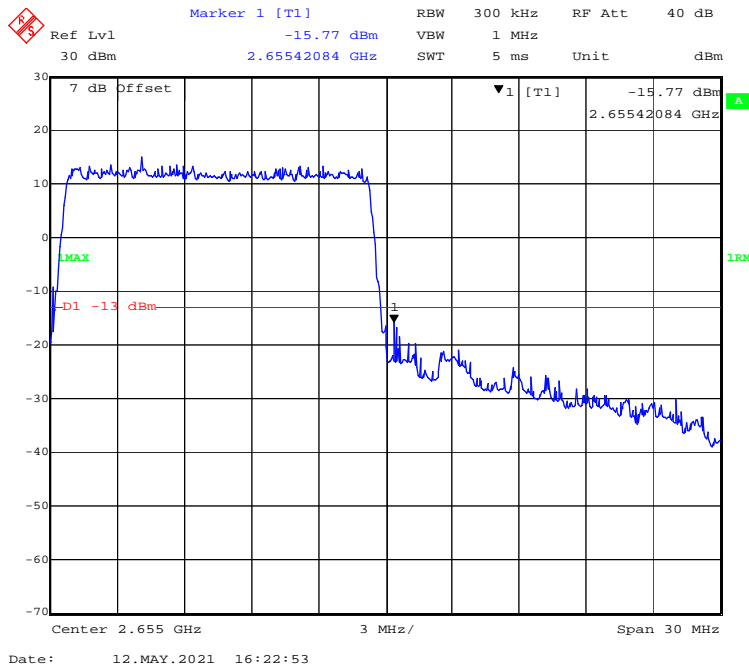


QPSK (20.0 MHz, FULL RB) - Left Band Edge

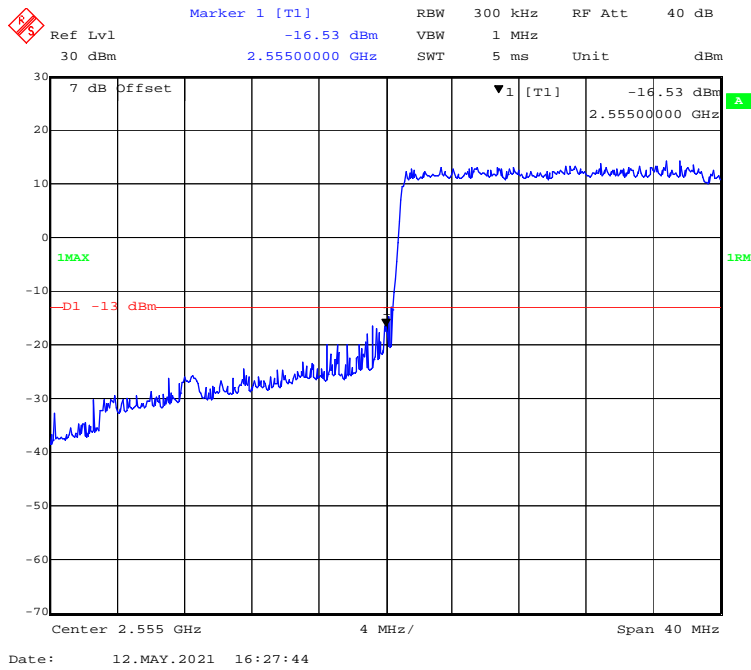


QPSK (20.0 MHz, FULL RB) - Right Band Edge

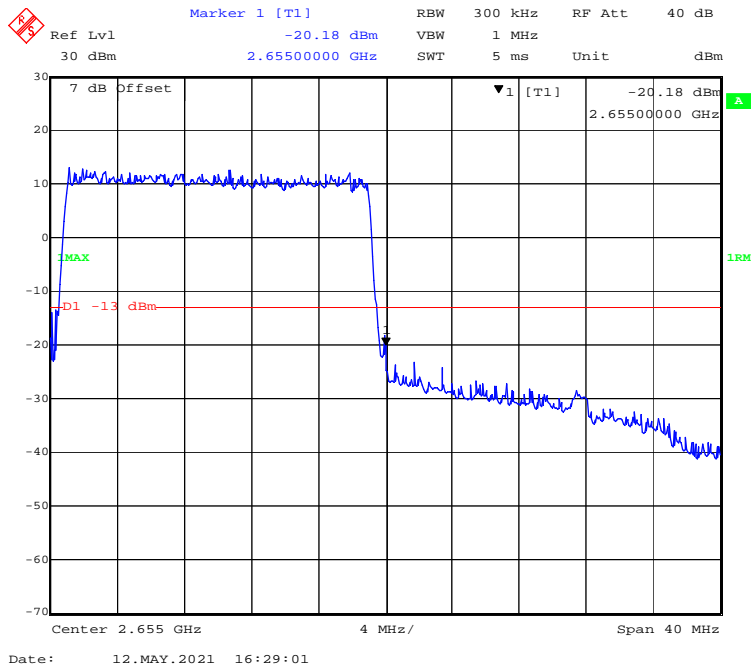


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

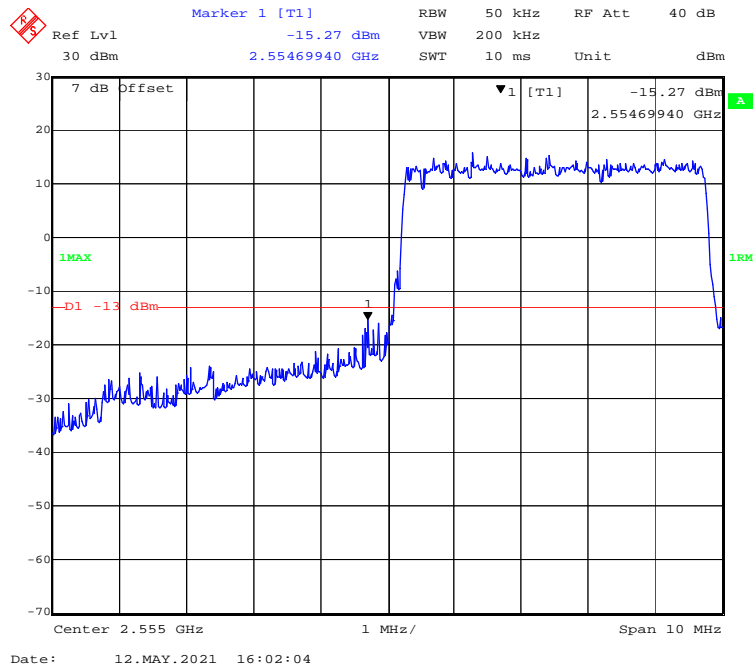


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

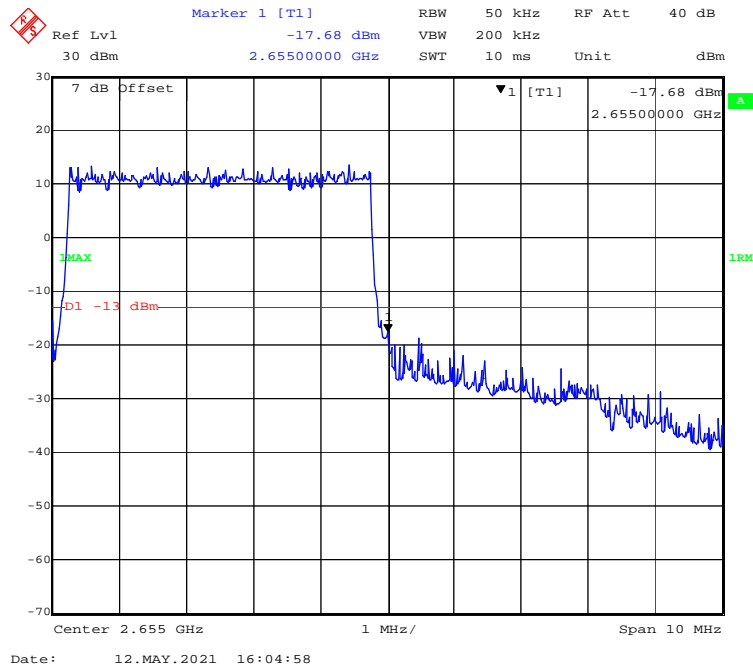


16-QAM (10.0 MHz, FULL RB) - Left Band Edge

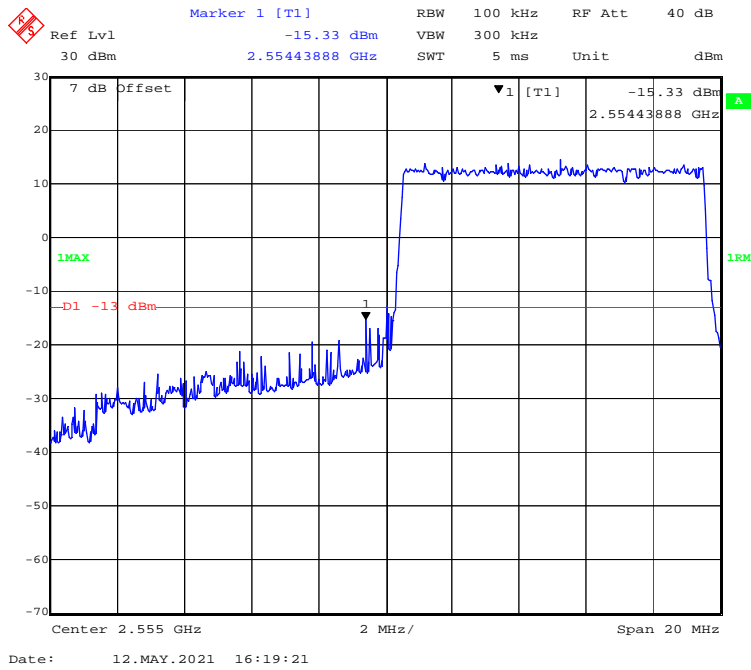


16-QAM (10.0 MHz, FULL RB) - Right Band Edge

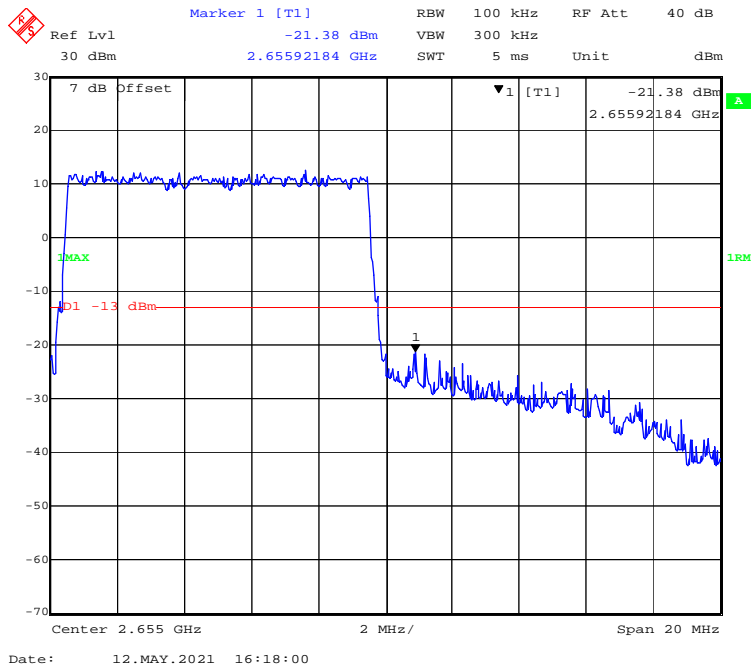


16-QAM (15.0 MHz, FULL RB) - Left Band Edge

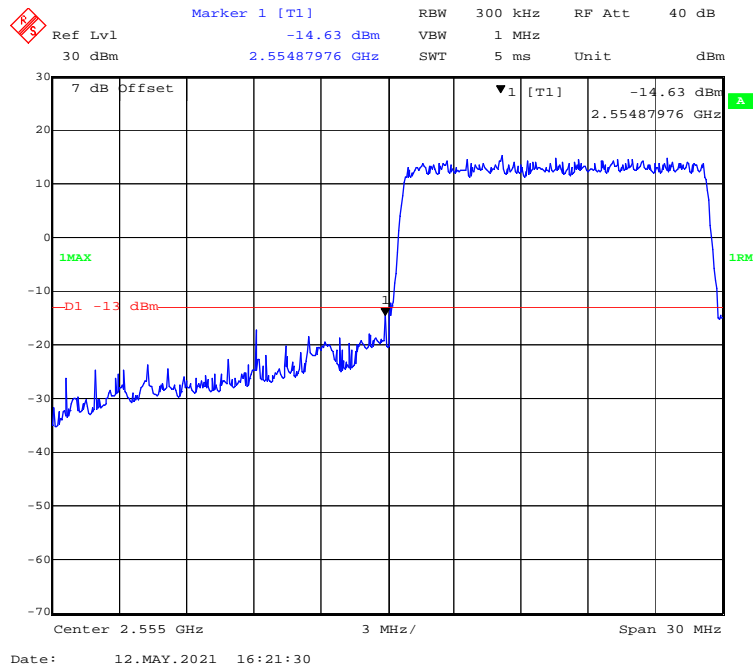


16-QAM (15.0 MHz, FULL RB) - Right Band Edge

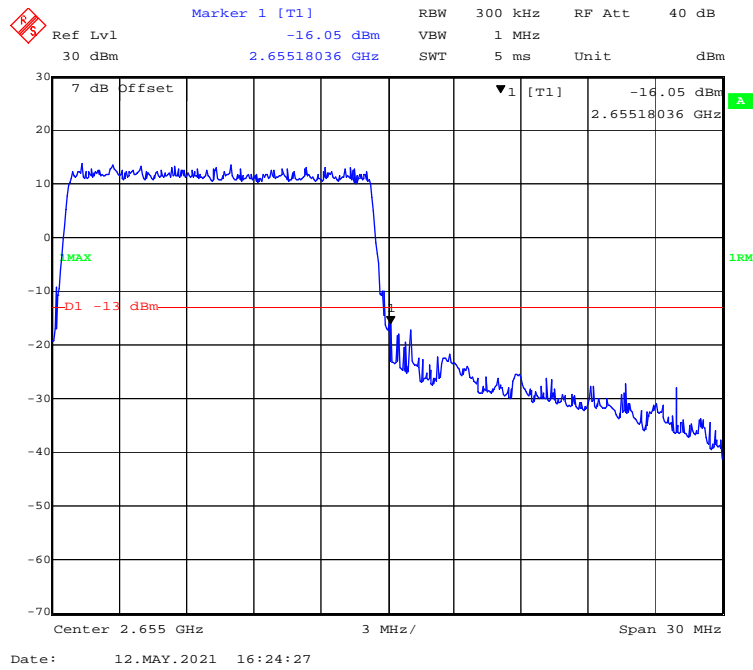

16-QAM (20.0 MHz, FULL RB) - Left Band Edge

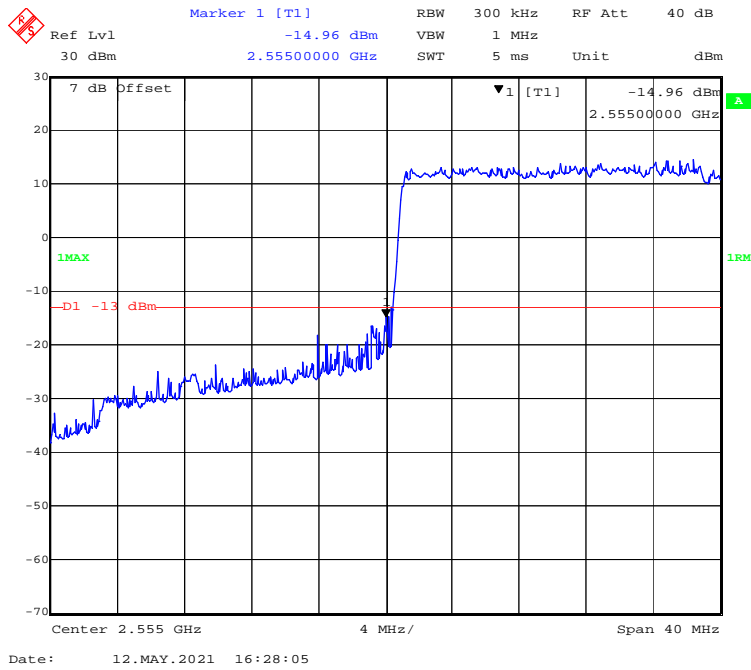


16-QAM (20.0 MHz, FULL RB) - Right Band Edge

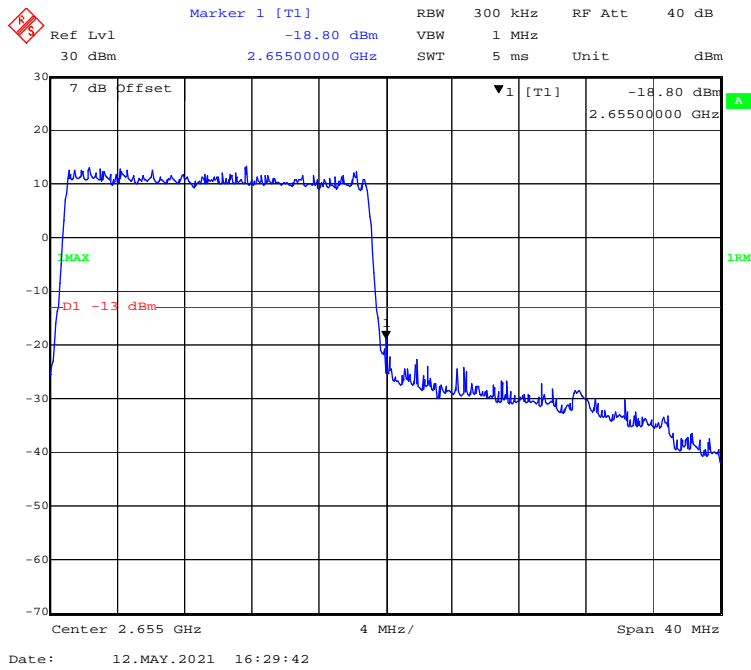


LTE Band 66:


QPSK (1.4 MHz, FULL RB) - Left Band Edge

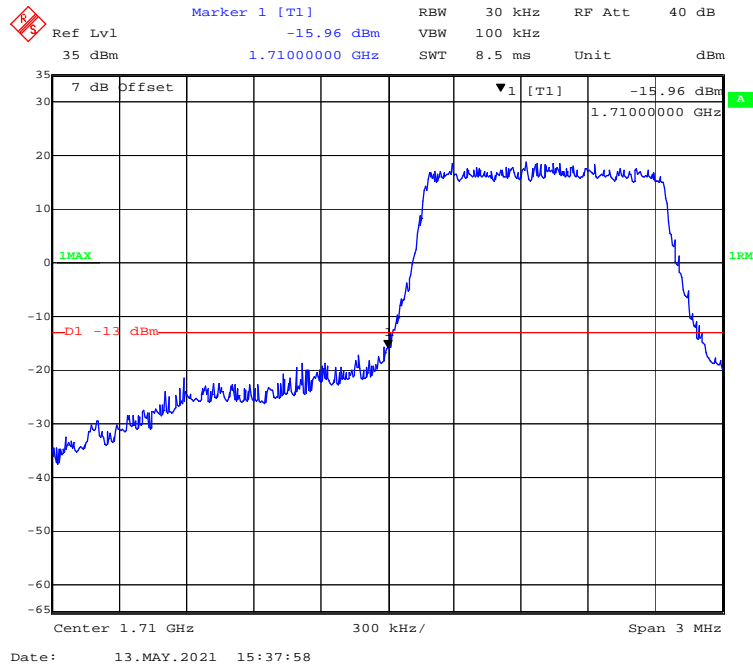


QPSK (1.4 MHz, FULL RB) - Right Band Edge

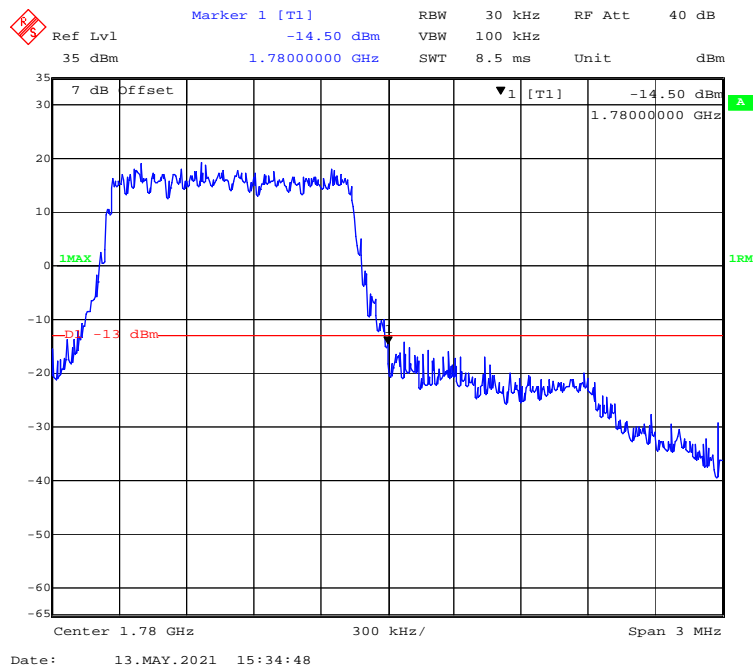


QPSK (3 MHz, FULL RB) - Left Band Edge

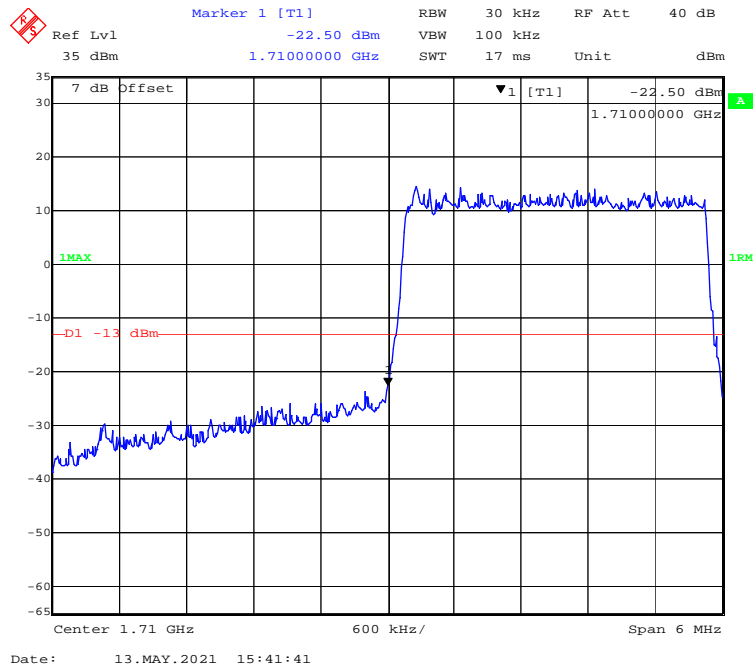


QPSK (3 MHz, FULL RB) - Right Band Edge

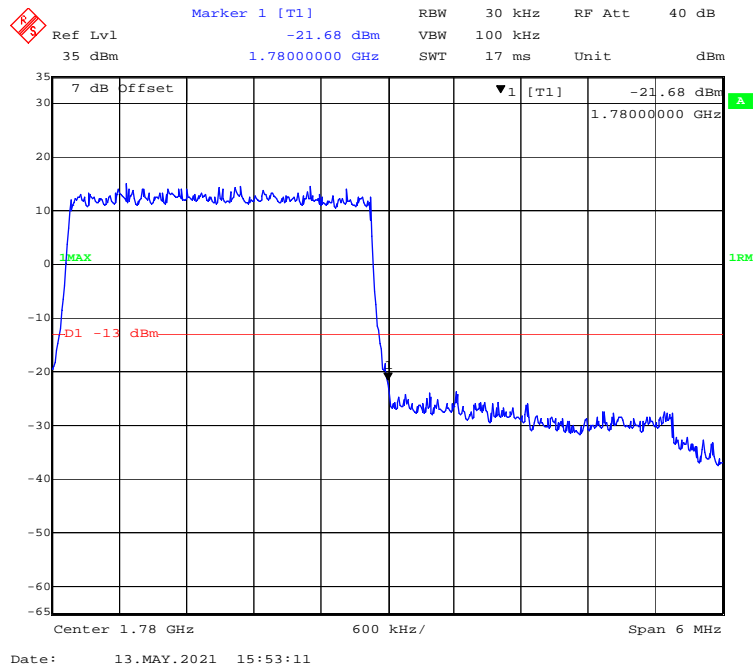


QPSK (5 MHz, FULL RB) - Left Band Edge

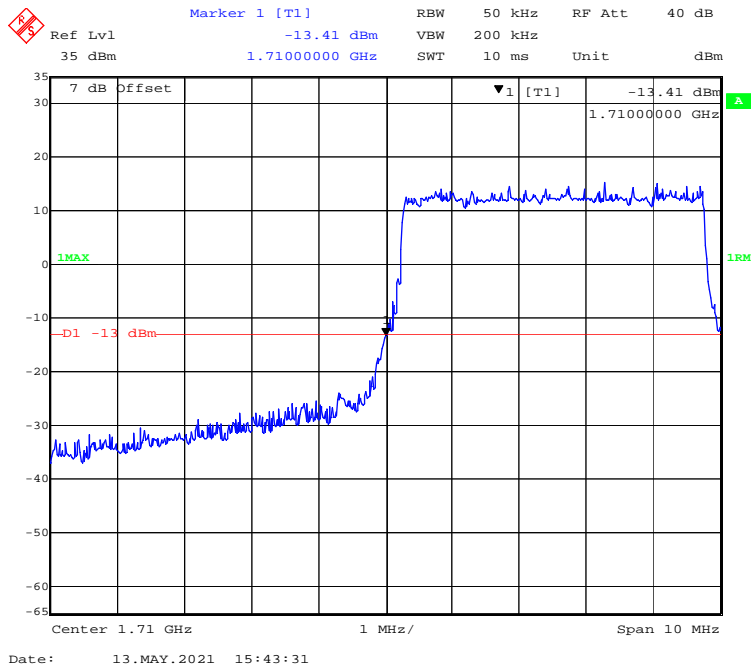


QPSK (5 MHz, FULL RB) - Right Band Edge

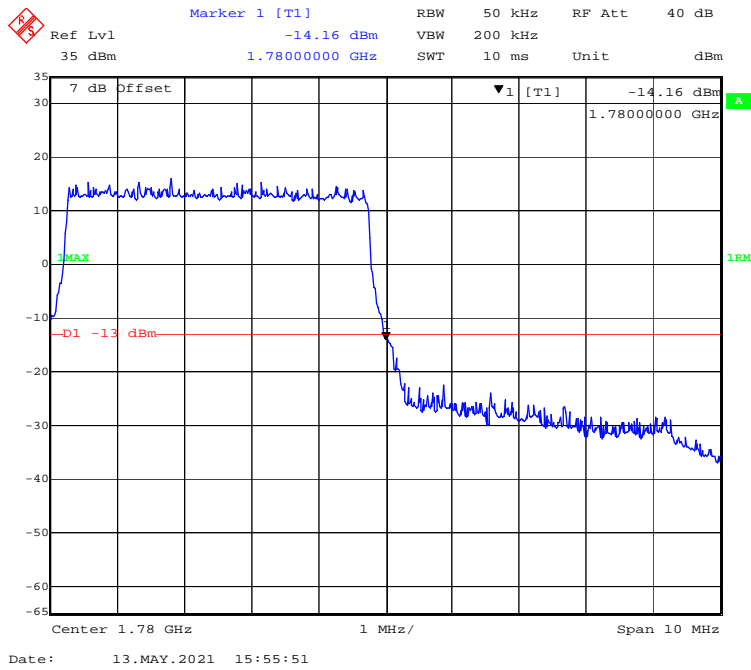


QPSK (10 MHz, FULL RB) - Left Band Edge

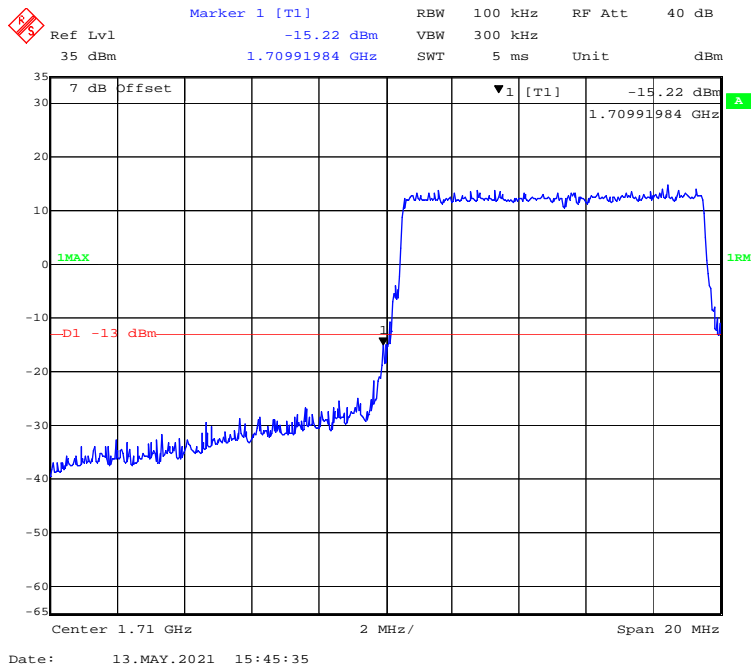


QPSK (10 MHz, FULL RB) - Right Band Edge

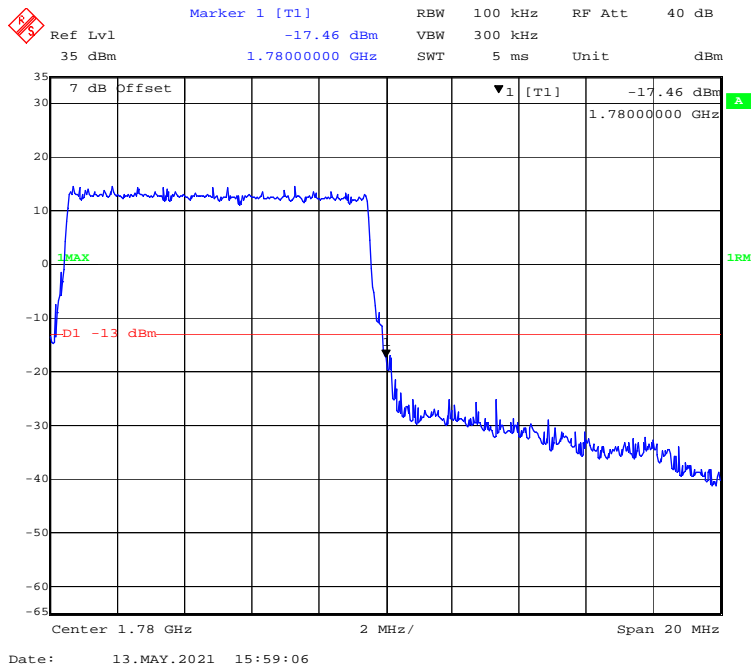


QPSK (15 MHz, FULL RB) - Left Band Edge

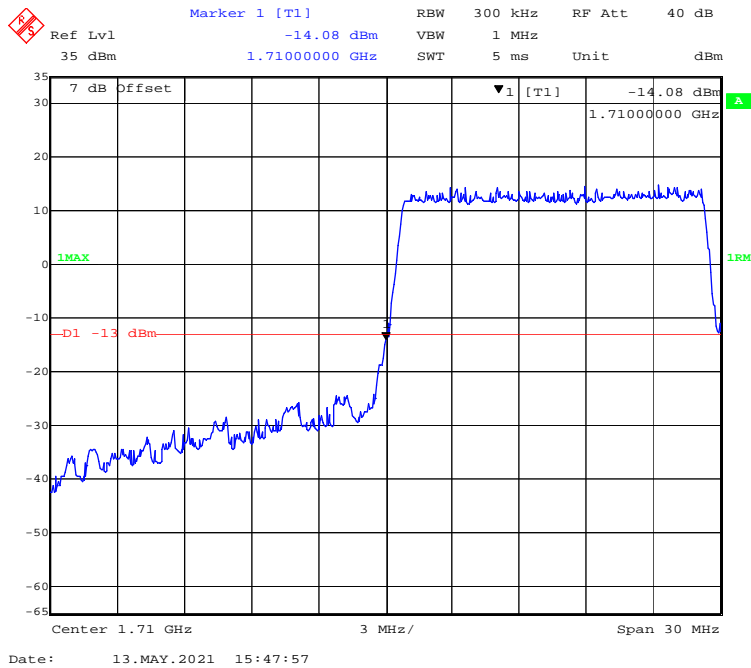


QPSK (15 MHz, FULL RB) - Right Band Edge

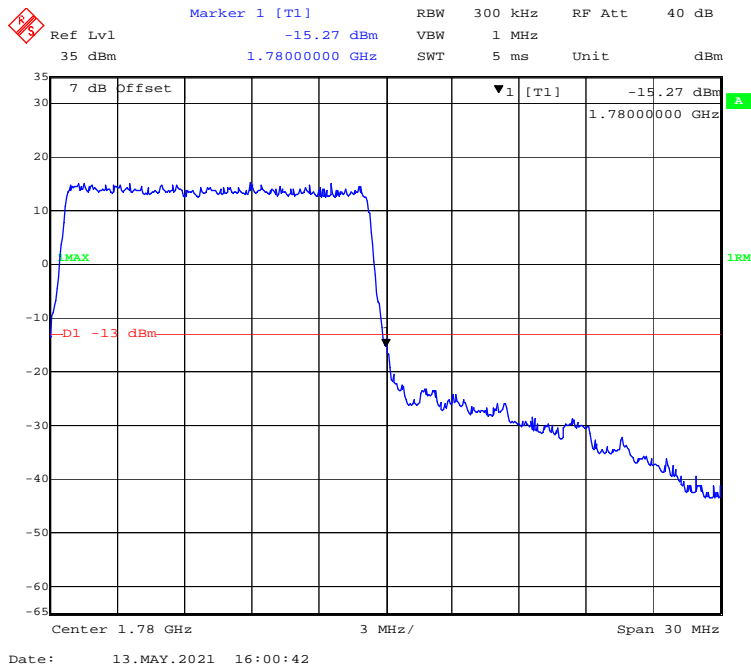


QPSK (20 MHz, FULL RB) - Left Band Edge

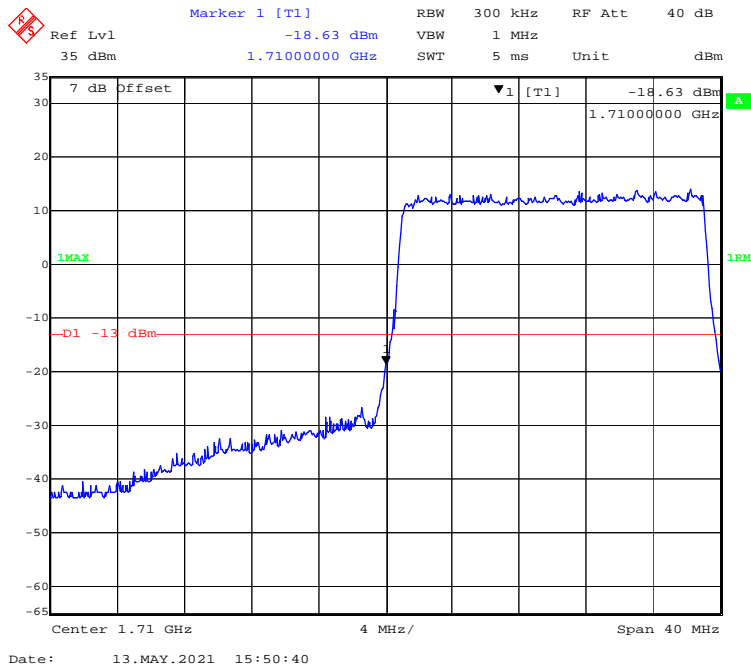


QPSK (20 MHz, FULL RB) - Right Band Edge

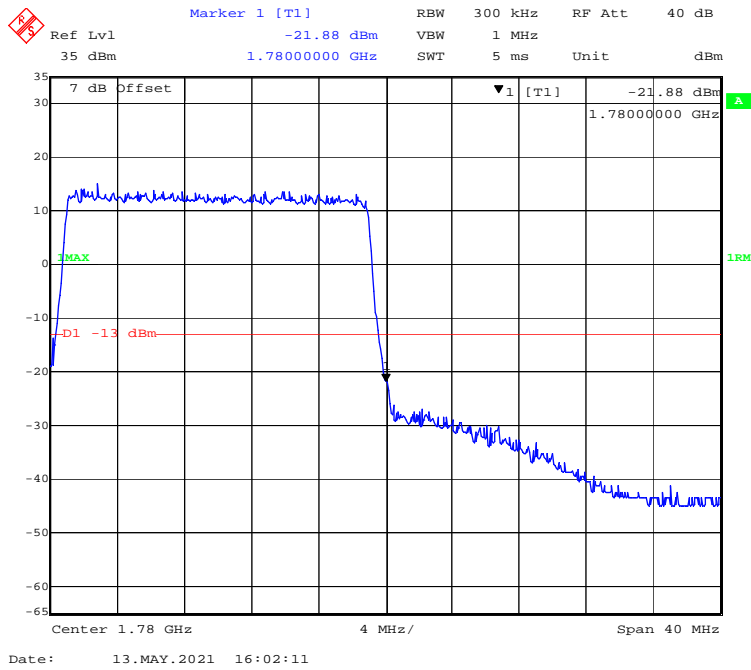


16-QAM (1.4 MHz, FULL RB) - Left Band Edge

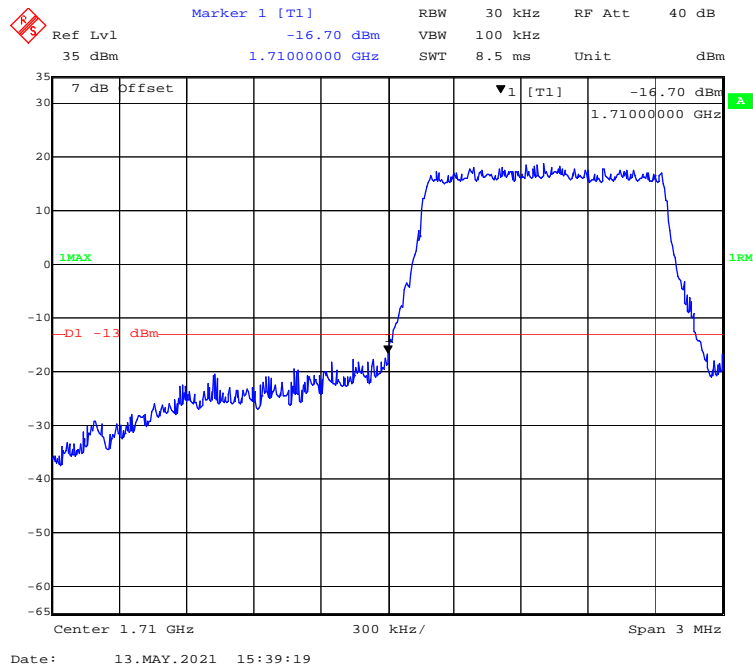


16-QAM (1.4 MHz, FULL RB) - Right Band Edge

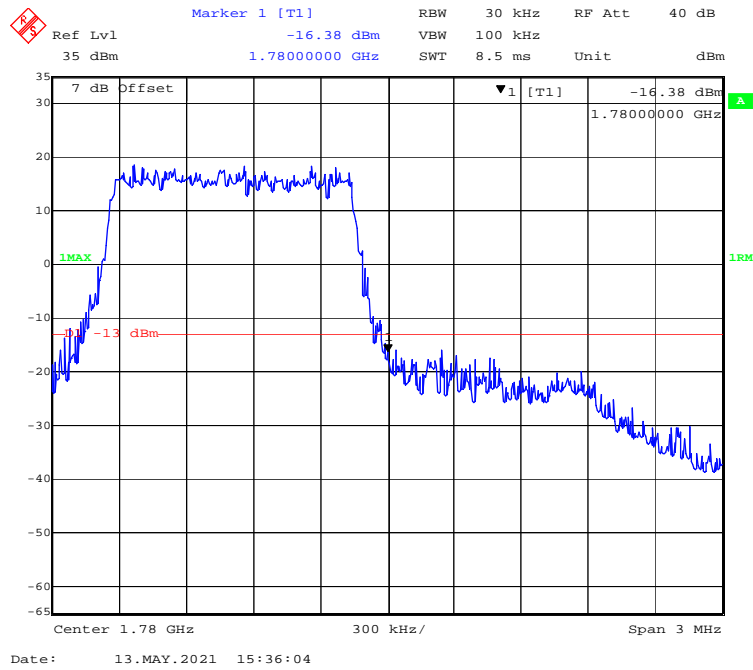


16-QAM (3 MHz, FULL RB) - Left Band Edge

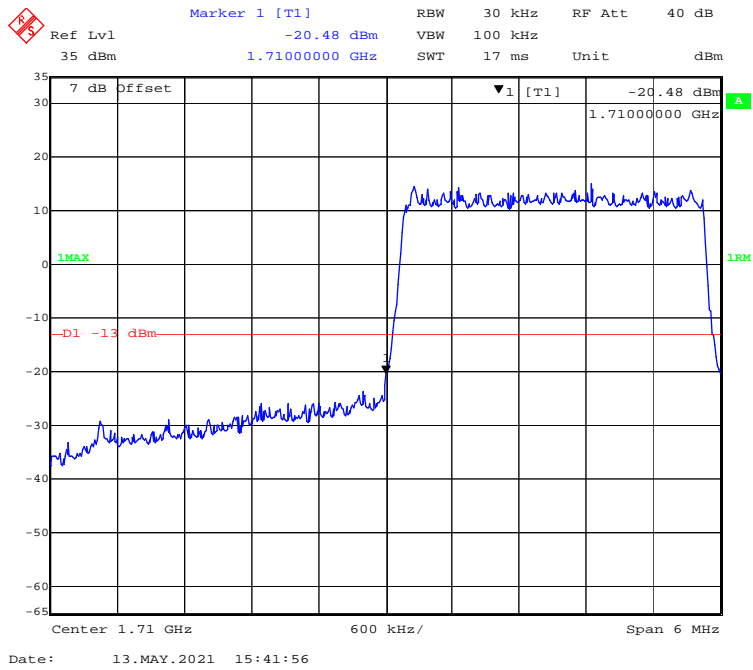


16-QAM (3 MHz, FULL RB) - Right Band Edge

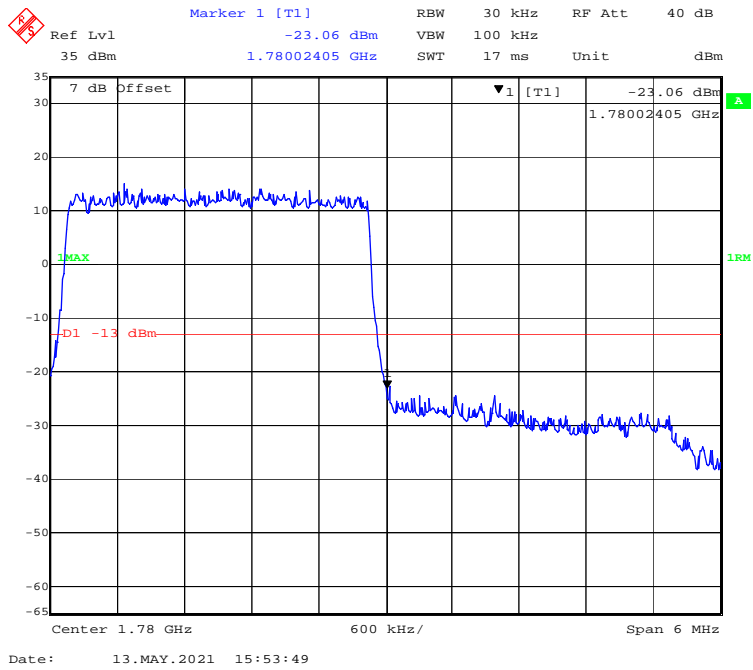


16-QAM (5 MHz, FULL RB) - Left Band Edge

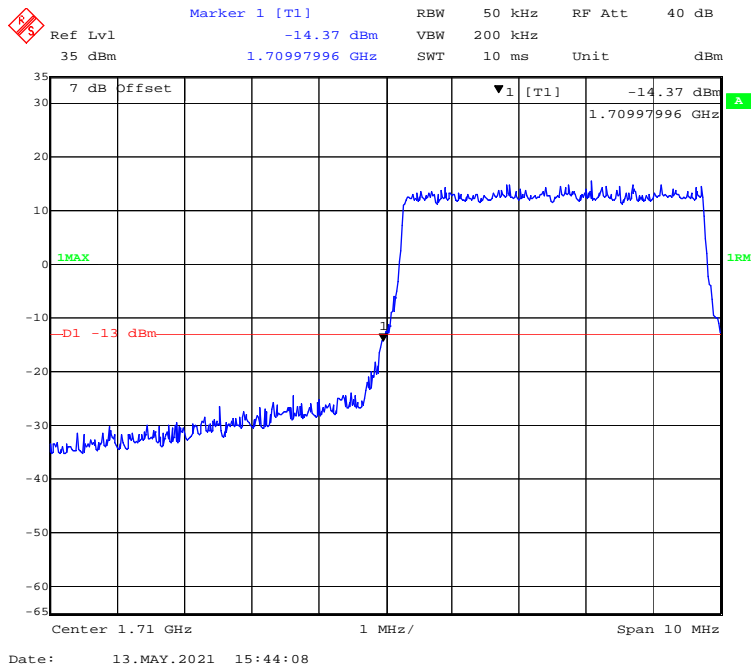


16-QAM (5 MHz, FULL RB) - Right Band Edge

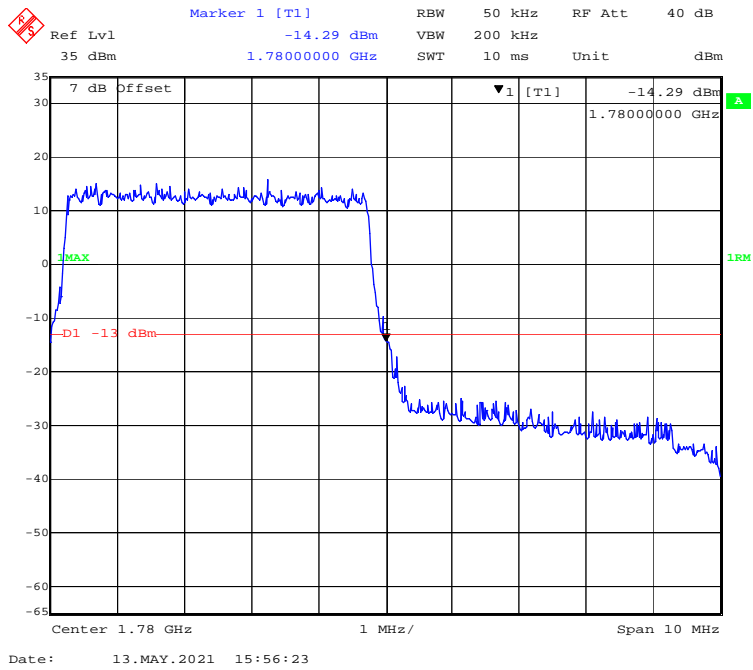


16-QAM (10 MHz, FULL RB) - Left Band Edge

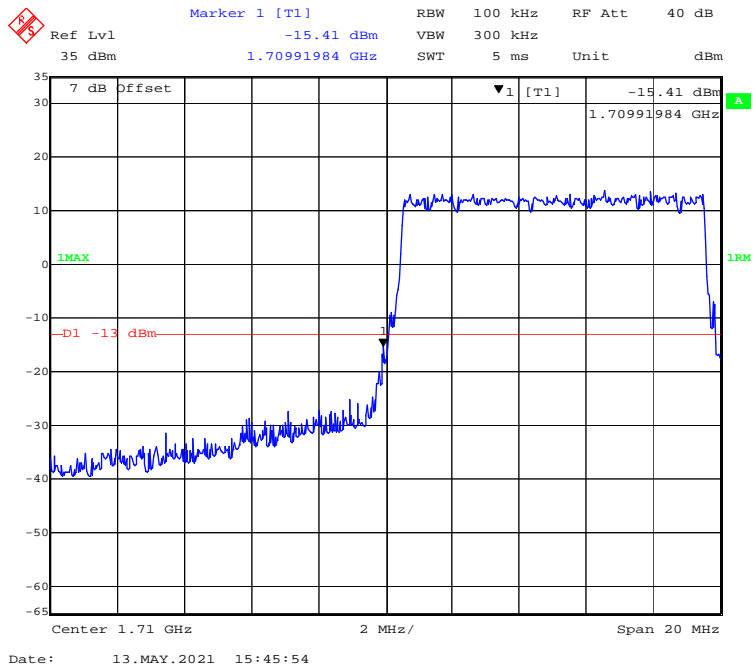


16-QAM (10 MHz, FULL RB) - Right Band Edge

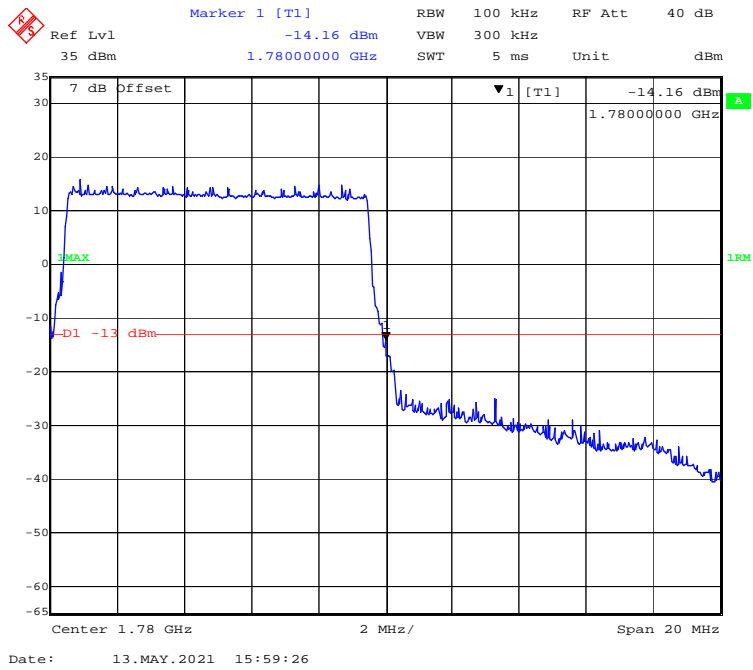


16-QAM (15 MHz, FULL RB) - Left Band Edge

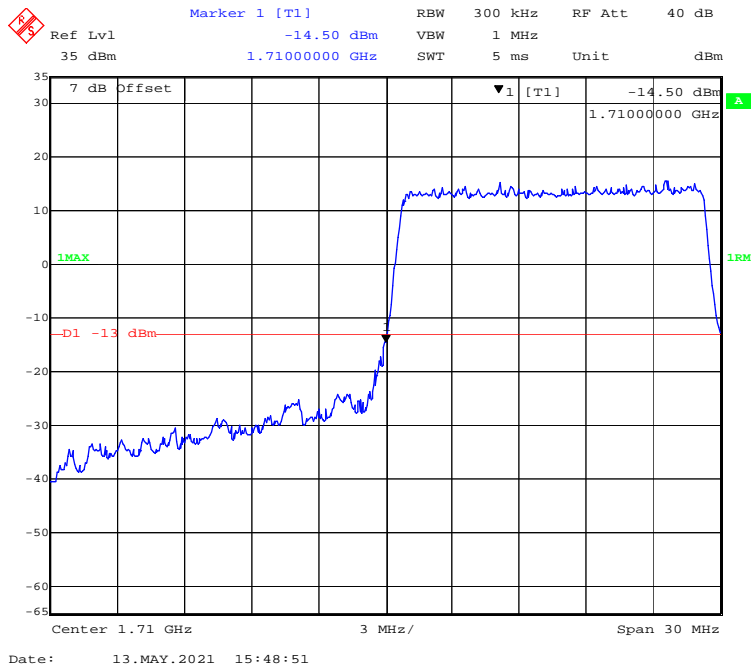


16-QAM (15 MHz, FULL RB) - Right Band Edge

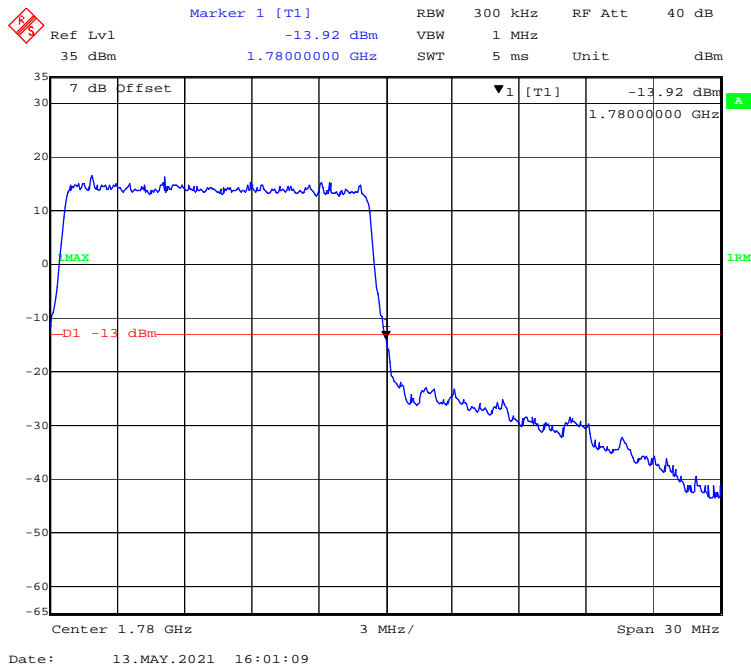

16-QAM (20 MHz, FULL RB) - Left Band Edge

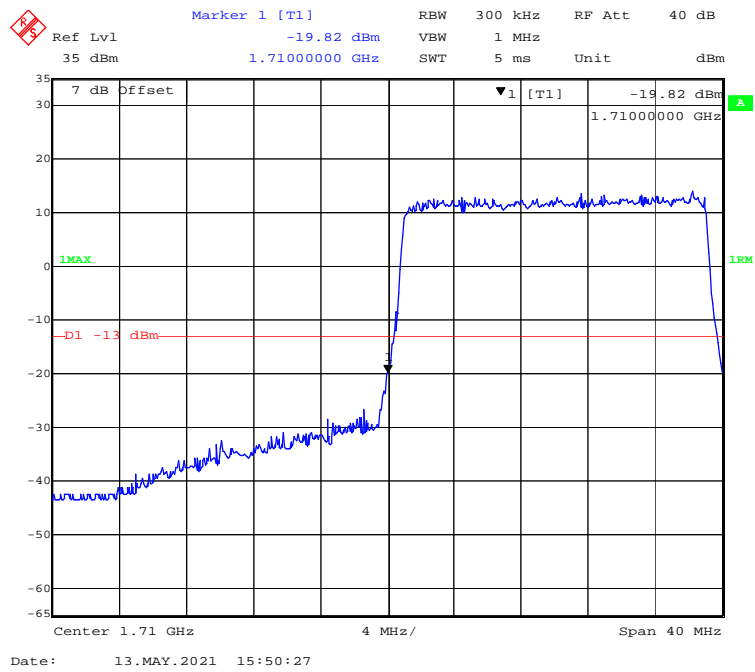

16-QAM (20 MHz, FULL RB) - Right Band Edge

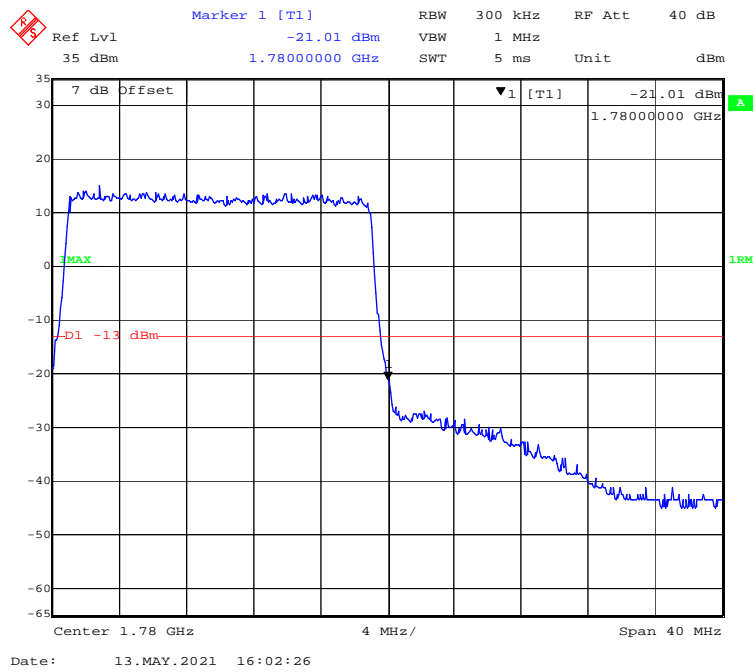

FCC § 2.1055; § 22.355; § 24.235; §27.54; §90.213- FREQUENCY STABILITY

Applicable Standards

FCC § 2.1055, §22.355, §24.235, §27.54 and §90.213.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

| Frequency Range (MHz) | Base, fixed (ppm) | Mobile > 3 watts (ppm) | Mobile ≤ 3 watts (ppm) |
|-----------------------|-------------------|------------------------|------------------------|
| 25 to 50 | 20.0 | 20.0 | 50.0 |
| 50 to 450 | 5.0 | 5.0 | 50.0 |
| 450 to 512 | 2.5 | 5.0 | 5.0 |
| 821 to 896 | 1.5 | 2.5 | 2.5 |
| 928 to 929. | 5.0 | N/A | N/A |
| 929 to 960. | 1.5 | N/A | N/A |
| 2110 to 2220 | 10.0 | N/A | N/A |


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

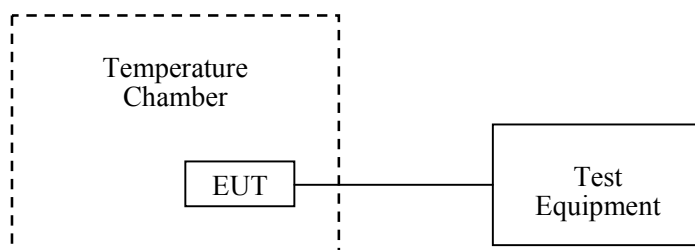

Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 24.9 °C |
| Relative Humidity: | 47% |
| ATM Pressure: | 101.2 kPa |

The testing was performed by Miller Xie on 2021-05-18.

EUT operation mode: Transmitting

Test Result: Compliant.

GSM 850 Band:

| GPRS Mode, Middle Channel, f _o =836.6 MHz | | | | |
|--|-----------------------------------|----------------------|-----------------------|-------------|
| Temperature (°C) | Power Supplied (V _{DC}) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| -30 | 7.7 | 15 | 0.01793 | 2.5 |
| -20 | | 19 | 0.02271 | 2.5 |
| -10 | | 9 | 0.01076 | 2.5 |
| 0 | | 14 | 0.01673 | 2.5 |
| 10 | | 13 | 0.01554 | 2.5 |
| 20 | | 14 | 0.01673 | 2.5 |
| 30 | | 6 | 0.00717 | 2.5 |
| 40 | | 12 | 0.01434 | 2.5 |
| 50 | | 16 | 0.01913 | 2.5 |
| 20 | | V min.= 6.9 | 15 | 0.01793 |
| 20 | V max.= 8.5 | 12 | 0.01434 | 2.5 |

| EGPRS Mode, Middle Channel, $f_0 = 836.6$ MHz | | | | |
|---|-----------------------------------|----------------------|-----------------------|-------------|
| Temperature (°C) | Power Supplied (V _{DC}) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| -30 | 7.7 | 15 | 0.01793 | 2.5 |
| -20 | | 16 | 0.01913 | 2.5 |
| -10 | | 17 | 0.02032 | 2.5 |
| 0 | | 13 | 0.01554 | 2.5 |
| 10 | | 18 | 0.02152 | 2.5 |
| 20 | | 14 | 0.01673 | 2.5 |
| 30 | | 17 | 0.02032 | 2.5 |
| 40 | | 13 | 0.01554 | 2.5 |
| 50 | | 15 | 0.01793 | 2.5 |
| 20 | | V min.= 6.9 | 17 | 0.02032 |
| 20 | V max.= 8.5 | 18 | 0.02152 | 2.5 |

WCDMA Band V:

| WCDMA Mode, Middle Channel, $f_0 = 836.6$ MHz | | | | |
|---|--|-----------------------------|------------------------------|--------------------|
| Temperature (°C) | Power Supplied (V_{DC}) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| -30 | 7.7 | 12 | 0.01434 | 2.5 |
| -20 | | 11 | 0.01315 | 2.5 |
| -10 | | 16 | 0.01913 | 2.5 |
| 0 | | 19 | 0.02271 | 2.5 |
| 10 | | 15 | 0.01793 | 2.5 |
| 20 | | 12 | 0.01434 | 2.5 |
| 30 | | 21 | 0.02510 | 2.5 |
| 40 | | 13 | 0.01554 | 2.5 |
| 50 | | 10 | 0.01195 | 2.5 |
| 20 | V min.= 6.9 | 10 | 0.01195 | 2.5 |
| 20 | V max.= 8.5 | 12 | 0.01434 | 2.5 |

PCS 1900 Band:

| GPRS Mode, Middle Channel, $f_0 = 1880.0$ MHz | | | | |
|---|--|-----------------------------|------------------------------|---------------|
| Temperature (°C) | Power Supplied (V_{DC}) | Frequency Error (Hz) | Frequency Error (ppm) | Result |
| -30 | 7.7 | -14 | -0.00745 | pass |
| -20 | | -10 | -0.00532 | pass |
| -10 | | -14 | -0.00745 | pass |
| 0 | | -6 | -0.00319 | pass |
| 10 | | -18 | -0.00957 | pass |
| 20 | | -13 | -0.00691 | pass |
| 30 | | -15 | -0.00798 | pass |
| 40 | | -18 | -0.00957 | pass |
| 50 | | -11 | -0.00585 | pass |
| 20 | V min.= 6.9 | -20 | -0.01064 | pass |
| 20 | V max.= 8.5 | -11 | -0.00585 | pass |

| EGPRS Mode, Middle Channel, $f_o = 1880.0$ MHz | | | | |
|--|-----------------------------------|----------------------|-----------------------|----------|
| Temperature (°C) | Power Supplied (V _{DC}) | Frequency Error (Hz) | Frequency Error (ppm) | Result |
| -30 | 7.7 | -15 | -0.00798 | pass |
| -20 | | -20 | -0.01064 | pass |
| -10 | | -11 | -0.00585 | pass |
| 0 | | -13 | -0.00691 | pass |
| 10 | | -20 | -0.01064 | pass |
| 20 | | -11 | -0.00585 | pass |
| 30 | | -13 | -0.00691 | pass |
| 40 | | -14 | -0.00745 | pass |
| 50 | | -11 | -0.00585 | pass |
| 20 | | V min.= 6.9 | -11 | -0.00585 |
| 20 | V max.= 8.5 | -8 | -0.00426 | pass |

WCDMA Band II:

| WCDMA Mode, Middle Channel, $f_o = 1880.0$ MHz | | | | |
|--|-----------------------------------|----------------------|-----------------------|----------|
| Temperature (°C) | Power Supplied (V _{DC}) | Frequency Error (Hz) | Frequency Error (ppm) | Result |
| -30 | 7.7 | 28 | 0.014894 | pass |
| -20 | | 17 | 0.009043 | pass |
| -10 | | 16 | 0.008511 | pass |
| 0 | | 16 | 0.008511 | pass |
| 10 | | 14 | 0.007447 | pass |
| 20 | | 7 | 0.003723 | pass |
| 30 | | 12 | 0.006383 | pass |
| 40 | | 11 | 0.005851 | pass |
| 50 | | 16 | 0.008511 | pass |
| 20 | | V min.= 6.9 | 14 | 0.007447 |
| 20 | V max.= 8.5 | 19 | 0.010106 | pass |

WCDMA Band IV:

| Temperature (°C) | Power Supplied (V _{DC}) | F _L (MHz) | F _H (MHz) | F _L Limit (MHz) | F _H Limit (MHz) |
|------------------|-----------------------------------|----------------------|----------------------|----------------------------|----------------------------|
| -30 | 7.7 | 1710.3962 | 1754.7658 | 1710 | 1755 |
| -20 | | 1710.3635 | 1754.7666 | 1710 | 1755 |
| -10 | | 1710.3826 | 1754.7672 | 1710 | 1755 |
| 0 | | 1710.3718 | 1754.7689 | 1710 | 1755 |
| 10 | | 1710.3691 | 1754.7665 | 1710 | 1755 |
| 20 | | 1710.3298 | 1754.7637 | 1710 | 1755 |
| 30 | | 1710.3648 | 1754.7654 | 1710 | 1755 |
| 40 | | 1710.4378 | 1754.7637 | 1710 | 1755 |
| 50 | | 1710.4365 | 1754.7626 | 1710 | 1755 |
| 20 | | V min.= 6.9 | 1710.4227 | 1754.7634 | 1710 |
| 20 | V max.= 8.5 | 1710.3456 | 1754.7658 | 1710 | 1755 |

LTE Band 2:

| f₀ =1880.0 MHz (QPSK) | | | | |
|---|--|-----------------------------|------------------------------|---------------|
| Temperature (°C) | Power Supplied (V_{DC}) | Frequency Error (Hz) | Frequency Error (ppm) | Result |
| -30 | 7.7 | 6 | 0.00319 | Pass |
| -20 | | 18 | 0.00957 | Pass |
| -10 | | 15 | 0.00798 | Pass |
| 0 | | 12 | 0.00638 | Pass |
| 10 | | 15 | 0.00798 | Pass |
| 20 | | 7 | 0.00372 | Pass |
| 30 | | 11 | 0.00585 | Pass |
| 40 | | 13 | 0.00691 | Pass |
| 50 | | 21 | 0.01117 | Pass |
| 20 | | V min.=6.9 | 16 | 0.00851 |
| 20 | V max.= 8.5 | 14 | 0.00745 | Pass |

| f₀ =1880.0 MHz (16-QAM) | | | | |
|---|--|-----------------------------|------------------------------|---------------|
| Temperature (°C) | Power Supplied (V_{DC}) | Frequency Error (Hz) | Frequency Error (ppm) | Result |
| -30 | 7.7 | 12 | 0.00638 | Pass |
| -20 | | 12 | 0.00638 | Pass |
| 0 | | 17 | 0.00904 | Pass |
| 0 | | 9 | 0.00479 | Pass |
| 10 | | 11 | 0.00585 | Pass |
| 20 | | 14 | 0.00745 | Pass |
| 30 | | 15 | 0.00798 | Pass |
| 40 | | 12 | 0.00638 | Pass |
| 50 | | 9 | 0.00479 | Pass |
| 20 | | V min.=6.9 | 9 | 0.00479 |
| 20 | V max.= 8.5 | 15 | 0.00798 | Pass |

LTE Band 4:

| Low Channel & High Channel (QPSK) /Channel Bandwidth:20MHz | | | | | |
|--|--------------------|----------------|----------------|----------------------|----------------------|
| Temperature | Power Supplied | F _L | F _H | F _L Limit | F _H Limit |
| (°C) | (V _{DC}) | (MHz) | (MHz) | (MHz) | (MHz) |
| -30 | 7.7 | 1710.0455 | 1754.9682 | 1710 | 1755 |
| -20 | | 1710.0418 | 1754.9683 | 1710 | 1755 |
| -10 | | 1710.0425 | 1754.9652 | 1710 | 1755 |
| 0 | | 1710.0480 | 1754.9602 | 1710 | 1755 |
| 10 | | 1710.0449 | 1754.9675 | 1710 | 1755 |
| 20 | | 1710.0434 | 1754.9637 | 1710 | 1755 |
| 30 | | 1710.0481 | 1754.9694 | 1710 | 1755 |
| 40 | | 1710.0475 | 1754.9624 | 1710 | 1755 |
| 50 | | 1710.0443 | 1754.9661 | 1710 | 1755 |
| 20 | | V min.= 6.9 | 1710.0419 | 1754.9689 | 1710 |
| 20 | V max.= 8.5 | 1710.0445 | 1754.9655 | 1710 | 1755 |

| Low Channel & High Channel (16-QAM) /Channel Bandwidth:20MHz | | | | | |
|--|--------------------|----------------|----------------|----------------------|----------------------|
| Temperature | Power Supplied | F _L | F _H | F _L Limit | F _H Limit |
| (°C) | (V _{DC}) | (MHz) | (MHz) | (MHz) | (MHz) |
| -30 | 7.7 | 1710.0409 | 1754.9646 | 1710 | 1755 |
| -20 | | 1710.0498 | 1754.9628 | 1710 | 1755 |
| -10 | | 1710.0423 | 1754.9631 | 1710 | 1755 |
| 0 | | 1710.0499 | 1754.9699 | 1710 | 1755 |
| 10 | | 1710.0481 | 1754.9677 | 1710 | 1755 |
| 20 | | 1710.0425 | 1754.9641 | 1710 | 1755 |
| 30 | | 1710.0428 | 1754.9617 | 1710 | 1755 |
| 40 | | 1710.0411 | 1754.9652 | 1710 | 1755 |
| 50 | | 1710.0475 | 1754.967 | 1710 | 1755 |
| 20 | | V min.= 6.9 | 1710.0476 | 1754.9627 | 1710 |
| 20 | V max.= 8.5 | 1710.0415 | 1754.9613 | 1710 | 1755 |

LTE Band 5:

| Middle Channel, $f_0 = 836.5$ MHz (QPSK) | | | | |
|--|--------------------|-----------------|-----------------|--------|
| Temperature | Power Supplied | Frequency Error | Frequency Error | Limit |
| (°C) | (V _{DC}) | (Hz) | (ppm) | (ppm) |
| -30 | 7.7 | 15 | 0.0179 | 2.5 |
| -20 | | 20 | 0.0239 | 2.5 |
| -10 | | 19 | 0.0227 | 2.5 |
| 0 | | 17 | 0.0203 | 2.5 |
| 10 | | 12 | 0.0143 | 2.5 |
| 20 | | 17 | 0.0203 | 2.5 |
| 30 | | 8 | 0.0096 | 2.5 |
| 40 | | 11 | 0.0132 | 2.5 |
| 50 | | 17 | 0.0203 | 2.5 |
| 20 | | V min.=6.9 | 12 | 0.0143 |
| 20 | V max.= 8.5 | 14 | 0.0167 | 2.5 |

| Middle Channel, $f_0 = 836.5$ MHz (16-QAM) | | | | |
|--|--------------------|-----------------|-----------------|--------|
| Temperature | Power Supplied | Frequency Error | Frequency Error | Limit |
| (°C) | (V _{DC}) | (Hz) | (ppm) | (ppm) |
| -30 | 7.7 | 15 | 0.0179 | 2.5 |
| -20 | | 12 | 0.0143 | 2.5 |
| 0 | | 18 | 0.0215 | 2.5 |
| 0 | | 20 | 0.0239 | 2.5 |
| 10 | | 19 | 0.0227 | 2.5 |
| 20 | | 11 | 0.0132 | 2.5 |
| 30 | | 13 | 0.0155 | 2.5 |
| 40 | | 13 | 0.0155 | 2.5 |
| 50 | | 17 | 0.0203 | 2.5 |
| 20 | | V min.=6.9 | 11 | 0.0132 |
| 20 | V max.= 8.5 | 17 | 0.0203 | 2.5 |

LTE Band 7:

| Low Channel & High Channel (QPSK) /Channel Bandwidth:20MHz | | | | | |
|--|--------------------|----------------|----------------|----------------------|----------------------|
| Temperature | Power Supplied | F _L | F _H | F _L Limit | F _H Limit |
| (°C) | (V _{DC}) | (MHz) | (MHz) | (MHz) | (MHz) |
| -30 | 7.7 | 2500.0427 | 2569.9516 | 2500 | 2570 |
| -20 | | 2500.0499 | 2569.9527 | 2500 | 2570 |
| -10 | | 2500.0409 | 2569.9566 | 2500 | 2570 |
| 0 | | 2500.0402 | 2569.9515 | 2500 | 2570 |
| 10 | | 2500.0429 | 2569.9564 | 2500 | 2570 |
| 20 | | 2500.0498 | 2569.9522 | 2500 | 2570 |
| 30 | | 2500.0411 | 2569.9554 | 2500 | 2570 |
| 40 | | 2500.0448 | 2569.9567 | 2500 | 2570 |
| 50 | | 2500.0444 | 2569.9566 | 2500 | 2570 |
| 20 | | V min.= 6.9 | 2500.0454 | 2569.9541 | 2500 |
| 20 | V max.= 8.5 | 2500.0496 | 2569.9551 | 2500 | 2570 |

| Low Channel & High Channel (16-QAM) /Channel Bandwidth:20MHz | | | | | |
|--|--------------------|----------------|----------------|----------------------|----------------------|
| Temperature | Power Supplied | F _L | F _H | F _L Limit | F _H Limit |
| (°C) | (V _{DC}) | (MHz) | (MHz) | (MHz) | (MHz) |
| -30 | 7.7 | 2500.0456 | 2569.9569 | 2500 | 2570 |
| -20 | | 2500.045 | 2569.9579 | 2500 | 2570 |
| -10 | | 2500.0476 | 2569.954 | 2500 | 2570 |
| 0 | | 2500.0499 | 2569.9562 | 2500 | 2570 |
| 10 | | 2500.0401 | 2569.9581 | 2500 | 2570 |
| 20 | | 2500.0474 | 2569.9531 | 2500 | 2570 |
| 30 | | 2500.0436 | 2569.9573 | 2500 | 2570 |
| 40 | | 2500.0488 | 2569.9543 | 2500 | 2570 |
| 50 | | 2500.0471 | 2569.9534 | 2500 | 2570 |
| 20 | | V min.= 6.9 | 2500.0427 | 2569.9551 | 2500 |
| 20 | V max.= 8.5 | 2500.0448 | 2569.9553 | 2500 | 2570 |

LTE Band 12:

| Low Channel & High Channel (QPSK) /Channel Bandwidth:20MHz | | | | | |
|--|--------------------|----------------|----------------|----------------------|----------------------|
| Temperature | Power Supplied | F _L | F _H | F _L Limit | F _H Limit |
| (°C) | (V _{DC}) | (MHz) | (MHz) | (MHz) | (MHz) |
| -30 | 7.7 | 699.9548 | 715.9406 | 699 | 716 |
| -20 | | 699.9515 | 715.9407 | 699 | 716 |
| -10 | | 699.9593 | 715.9477 | 699 | 716 |
| 0 | | 699.9595 | 715.941 | 699 | 716 |
| 10 | | 699.9576 | 715.943 | 699 | 716 |
| 20 | | 699.9538 | 715.9469 | 699 | 716 |
| 30 | | 699.958 | 715.9421 | 699 | 716 |
| 40 | | 699.9533 | 715.9497 | 699 | 716 |
| 50 | | 699.9509 | 715.9448 | 699 | 716 |
| 20 | | V min.= 6.9 | 699.9573 | 715.9417 | 699 |
| 20 | V max.= 8.5 | 699.9542 | 715.9494 | 699 | 716 |

| Low Channel & High Channel (16-QAM) /Channel Bandwidth:20MHz | | | | | |
|--|--------------------|----------------|----------------|----------------------|----------------------|
| Temperature | Power Supplied | F _L | F _H | F _L Limit | F _H Limit |
| (°C) | (V _{DC}) | (MHz) | (MHz) | (MHz) | (MHz) |
| -30 | 7.7 | 699.9565 | 715.9423 | 699 | 716 |
| -20 | | 699.9559 | 715.9454 | 699 | 716 |
| -10 | | 699.9584 | 715.9453 | 699 | 716 |
| 0 | | 699.9515 | 715.9433 | 699 | 716 |
| 10 | | 699.9551 | 715.9401 | 699 | 716 |
| 20 | | 699.9557 | 715.9486 | 699 | 716 |
| 30 | | 699.9589 | 715.947 | 699 | 716 |
| 40 | | 699.9511 | 715.9423 | 699 | 716 |
| 50 | | 699.955 | 715.947 | 699 | 716 |
| 20 | | V min.= 6.9 | 699.9543 | 715.9483 | 699 |
| 20 | V max.= 8.5 | 699.9586 | 715.944 | 699 | 716 |

LTE Band 17:

| Low Channel & High Channel (QPSK) /Channel Bandwidth:20MHz | | | | | |
|--|--------------------|----------------|----------------|----------------------|----------------------|
| Temperature | Power Supplied | F _L | F _H | F _L Limit | F _H Limit |
| (°C) | (V _{DC}) | (MHz) | (MHz) | (MHz) | (MHz) |
| -30 | 7.7 | 704.9589 | 715.9483 | 704 | 716 |
| -20 | | 704.9517 | 715.9469 | 704 | 716 |
| -10 | | 704.9555 | 715.9471 | 704 | 716 |
| 0 | | 704.9573 | 715.9444 | 704 | 716 |
| 10 | | 704.9559 | 715.9496 | 704 | 716 |
| 20 | | 704.9552 | 715.9427 | 704 | 716 |
| 30 | | 704.9562 | 715.9427 | 704 | 716 |
| 40 | | 704.9562 | 715.9489 | 704 | 716 |
| 50 | | 704.9504 | 715.9498 | 704 | 716 |
| 20 | | V min.= 6.9 | 704.9515 | 715.9493 | 704 |
| 20 | V max.=8.5 | 704.9522 | 715.9446 | 704 | 716 |

| Low Channel & High Channel (16-QAM) /Channel Bandwidth:20MHz | | | | | |
|--|--------------------|----------------|----------------|----------------------|----------------------|
| Temperature | Power Supplied | F _L | F _H | F _L Limit | F _H Limit |
| (°C) | (V _{DC}) | (MHz) | (MHz) | (MHz) | (MHz) |
| -30 | 7.7 | 704.9537 | 715.949 | 704 | 716 |
| -20 | | 704.9553 | 715.9489 | 704 | 716 |
| -10 | | 704.9584 | 715.9495 | 704 | 716 |
| 0 | | 704.9518 | 715.9454 | 704 | 716 |
| 10 | | 704.9567 | 715.9419 | 704 | 716 |
| 20 | | 704.9533 | 715.946 | 704 | 716 |
| 30 | | 704.9528 | 715.9418 | 704 | 716 |
| 40 | | 704.9524 | 715.9452 | 704 | 716 |
| 50 | | 704.9529 | 715.9418 | 704 | 716 |
| 20 | | V min.=6.9 | 704.9543 | 715.9403 | 704 |
| 20 | V max.= 8.5 | 704.9577 | 715.9459 | 704 | 716 |

LTE Band 25:

| Middle Channel, $f_0 = 1882.5$ MHz (QPSK) | | | | |
|---|--------------------|-----------------|-----------------|---------|
| Temperature | Power Supplied | Frequency Error | Frequency Error | Limit |
| (°C) | (V _{DC}) | (Hz) | (ppm) | (ppm) |
| -30 | 7.7 | 17 | 0.00903 | 2.5 |
| -20 | | 12 | 0.00637 | 2.5 |
| -10 | | 16 | 0.00850 | 2.5 |
| 0 | | 11 | 0.00584 | 2.5 |
| 10 | | 15 | 0.00797 | 2.5 |
| 20 | | 16 | 0.00850 | 2.5 |
| 30 | | 10 | 0.00531 | 2.5 |
| 40 | | 13 | 0.00691 | 2.5 |
| 50 | | 15 | 0.00797 | 2.5 |
| 20 | | V min.=6.9 | 16 | 0.00850 |
| 20 | V max.= 8.5 | 7 | 0.00372 | 2.5 |

| Middle Channel, $f_0 = 1882.5$ MHz (16-QAM) | | | | |
|---|--------------------|-----------------|-----------------|---------|
| Temperature | Power Supplied | Frequency Error | Frequency Error | Limit |
| (°C) | (V _{DC}) | (Hz) | (ppm) | (ppm) |
| -30 | 7.7 | 11 | 0.00584 | 2.5 |
| -20 | | 13 | 0.00691 | 2.5 |
| 0 | | 15 | 0.00797 | 2.5 |
| 0 | | 12 | 0.00637 | 2.5 |
| 10 | | 19 | 0.01009 | 2.5 |
| 20 | | 8 | 0.00425 | 2.5 |
| 30 | | 14 | 0.00744 | 2.5 |
| 40 | | 13 | 0.00691 | 2.5 |
| 50 | | 14 | 0.00744 | 2.5 |
| 20 | | V min.=6.9 | 19 | 0.01009 |
| 20 | V max.= 8.5 | 14 | 0.00744 | 2.5 |

LTE Band 26:

| Middle Channel, $f_0 = 831.5$ MHz (QPSK) | | | | |
|--|--------------------|-----------------|-----------------|--------|
| Temperature | Power Supplied | Frequency Error | Frequency Error | Limit |
| (°C) | (V _{DC}) | (Hz) | (ppm) | (ppm) |
| -30 | 7.7 | 8 | 0.0096 | 2.5 |
| -20 | | 12 | 0.0143 | 2.5 |
| -10 | | 12 | 0.0143 | 2.5 |
| 0 | | 14 | 0.0167 | 2.5 |
| 10 | | 15 | 0.0179 | 2.5 |
| 20 | | 16 | 0.0191 | 2.5 |
| 30 | | 17 | 0.0203 | 2.5 |
| 40 | | 8 | 0.0096 | 2.5 |
| 50 | | 11 | 0.0132 | 2.5 |
| 20 | | V min.=6.9 | 12 | 0.0143 |
| 20 | V max.= 8.5 | 21 | 0.0251 | 2.5 |

| Middle Channel, $f_0 = 831.5$ MHz (16-QAM) | | | | |
|--|--------------------|-----------------|-----------------|--------|
| Temperature | Power Supplied | Frequency Error | Frequency Error | Limit |
| (°C) | (V _{DC}) | (Hz) | (ppm) | (ppm) |
| -30 | 7.7 | 14 | 0.0167 | 2.5 |
| -20 | | 14 | 0.0167 | 2.5 |
| 0 | | 19 | 0.0227 | 2.5 |
| 0 | | 23 | 0.0275 | 2.5 |
| 10 | | 16 | 0.0191 | 2.5 |
| 20 | | 9 | 0.0108 | 2.5 |
| 30 | | 14 | 0.0167 | 2.5 |
| 40 | | 11 | 0.0132 | 2.5 |
| 50 | | 18 | 0.0215 | 2.5 |
| 20 | | V min.=6.9 | 10 | 0.0120 |
| 20 | V max.= 8.5 | 20 | 0.0239 | 2.5 |

LTE Band 40(2305MHz-2315MHz):

| Low Channel & High Channel (QPSK) /Channel Bandwidth:20MHz | | | | | |
|--|--------------------|----------------|----------------|----------------------|----------------------|
| Temperature | Power Supplied | F _L | F _H | F _L Limit | F _H Limit |
| (°C) | (V _{DC}) | (MHz) | (MHz) | (MHz) | (MHz) |
| -30 | 7.7 | 2305.053 | 2314.9546 | 2305 | 2315 |
| -20 | | 2305.0501 | 2314.9562 | 2305 | 2315 |
| -10 | | 2305.0509 | 2314.9551 | 2305 | 2315 |
| 0 | | 2305.0525 | 2314.9545 | 2305 | 2315 |
| 10 | | 2305.0579 | 2314.9505 | 2305 | 2315 |
| 20 | | 2305.0584 | 2314.9526 | 2305 | 2315 |
| 30 | | 2305.052 | 2314.9575 | 2305 | 2315 |
| 40 | | 2305.0584 | 2314.9566 | 2305 | 2315 |
| 50 | | 2305.0554 | 2314.9529 | 2305 | 2315 |
| 20 | | V min.= 6.9 | 2305.0539 | 2314.9581 | 2305 |
| 20 | V max.= 8.5 | 2305.0599 | 2314.9515 | 2305 | 2315 |

| Low Channel & High Channel (16-QAM) /Channel Bandwidth:20MHz | | | | | |
|--|--------------------|----------------|----------------|----------------------|----------------------|
| Temperature | Power Supplied | F _L | F _H | F _L Limit | F _H Limit |
| (°C) | (V _{DC}) | (MHz) | (MHz) | (MHz) | (MHz) |
| -30 | 7.7 | 2305.0579 | 2314.9574 | 2305 | 2315 |
| -20 | | 2305.0592 | 2314.9587 | 2305 | 2315 |
| -10 | | 2305.0569 | 2314.9577 | 2305 | 2315 |
| 0 | | 2305.0521 | 2314.9559 | 2305 | 2315 |
| 10 | | 2305.0524 | 2314.9514 | 2305 | 2315 |
| 20 | | 2305.0502 | 2314.9584 | 2305 | 2315 |
| 30 | | 2305.0533 | 2314.9559 | 2305 | 2315 |
| 40 | | 2305.0557 | 2314.957 | 2305 | 2315 |
| 50 | | 2305.0565 | 2314.9533 | 2305 | 2315 |
| 20 | | V min.= 6.9 | 2305.0505 | 2314.9599 | 2305 |
| 20 | V max.= 8.5 | 2305.0542 | 2314.9587 | 2305 | 2315 |

LTE Band 40(2350MHz-2360MHz):

| Low Channel & High Channel (QPSK) /Channel Bandwidth:20MHz | | | | | |
|--|--------------------|----------------|----------------|----------------------|----------------------|
| Temperature | Power Supplied | F _L | F _H | F _L Limit | F _H Limit |
| (°C) | (V _{DC}) | (MHz) | (MHz) | (MHz) | (MHz) |
| -30 | 7.7 | 2350.0562 | 2359.9558 | 2350 | 2360 |
| -20 | | 2350.0588 | 2359.953 | 2350 | 2360 |
| -10 | | 2350.0582 | 2359.9529 | 2350 | 2360 |
| 0 | | 2350.0554 | 2359.9525 | 2350 | 2360 |
| 10 | | 2350.0588 | 2359.9569 | 2350 | 2360 |
| 20 | | 2350.0599 | 2359.9534 | 2350 | 2360 |
| 30 | | 2350.0521 | 2359.9557 | 2350 | 2360 |
| 40 | | 2350.0505 | 2359.959 | 2350 | 2360 |
| 50 | | 2350.0547 | 2359.9599 | 2350 | 2360 |
| 20 | | V min.= 6.9 | 2350.0515 | 2359.9512 | 2350 |
| 20 | V max.= 8.5 | 2350.0549 | 2359.9574 | 2350 | 2360 |

| Low Channel & High Channel (16-QAM) /Channel Bandwidth:20MHz | | | | | |
|--|--------------------|----------------|----------------|----------------------|----------------------|
| Temperature | Power Supplied | F _L | F _H | F _L Limit | F _H Limit |
| (°C) | (V _{DC}) | (MHz) | (MHz) | (MHz) | (MHz) |
| -30 | 7.7 | 2350.0521 | 2359.955 | 2350 | 2360 |
| -20 | | 2350.053 | 2359.956 | 2350 | 2360 |
| -10 | | 2350.0552 | 2359.9561 | 2350 | 2360 |
| 0 | | 2350.0507 | 2359.9557 | 2350 | 2360 |
| 10 | | 2350.0543 | 2359.9566 | 2350 | 2360 |
| 20 | | 2350.053 | 2359.9506 | 2350 | 2360 |
| 30 | | 2350.0516 | 2359.9516 | 2350 | 2360 |
| 40 | | 2350.0598 | 2359.9544 | 2350 | 2360 |
| 50 | | 2350.0573 | 2359.9506 | 2350 | 2360 |
| 20 | | V min.= 6.9 | 2350.0553 | 2359.9549 | 2350 |
| 20 | V max.= 8.5 | 2350.0507 | 2359.9591 | 2350 | 2360 |

LTE Band 41:

| Low Channel & High Channel (QPSK) /Channel Bandwidth:20MHz | | | | | |
|--|--------------------|----------------|----------------|----------------------|----------------------|
| Temperature | Power Supplied | F _L | F _H | F _L Limit | F _H Limit |
| (°C) | (V _{DC}) | (MHz) | (MHz) | (MHz) | (MHz) |
| -30 | 7.7 | 2555.054 | 2654.9513 | 2555 | 2655 |
| -20 | | 2555.0507 | 2654.9594 | 2555 | 2655 |
| -10 | | 2555.0563 | 2654.958 | 2555 | 2655 |
| 0 | | 2555.0538 | 2654.9594 | 2555 | 2655 |
| 10 | | 2555.0598 | 2654.9558 | 2555 | 2655 |
| 20 | | 2555.0547 | 2654.9578 | 2555 | 2655 |
| 30 | | 2555.0507 | 2654.955 | 2555 | 2655 |
| 40 | | 2555.0568 | 2654.951 | 2555 | 2655 |
| 50 | | 2555.0581 | 2654.9543 | 2555 | 2655 |
| 20 | | V min.= 6.9 | 2555.0556 | 2654.9553 | 2555 |
| 20 | V max.= 8.5 | 2555.0523 | 2654.9508 | 2555 | 2655 |

| Low Channel & High Channel (16-QAM) /Channel Bandwidth:20MHz | | | | | |
|--|--------------------|----------------|----------------|----------------------|----------------------|
| Temperature | Power Supplied | F _L | F _H | F _L Limit | F _H Limit |
| (°C) | (V _{DC}) | (MHz) | (MHz) | (MHz) | (MHz) |
| -30 | 7.7 | 2555.054 | 2654.9586 | 2555 | 2655 |
| -20 | | 2555.0505 | 2654.9555 | 2555 | 2655 |
| -10 | | 2555.0551 | 2654.951 | 2555 | 2655 |
| 0 | | 2555.0544 | 2654.9567 | 2555 | 2655 |
| 10 | | 2555.0566 | 2654.9553 | 2555 | 2655 |
| 20 | | 2555.0561 | 2654.9589 | 2555 | 2655 |
| 30 | | 2555.0599 | 2654.952 | 2555 | 2655 |
| 40 | | 2555.0522 | 2654.9501 | 2555 | 2655 |
| 50 | | 2555.0512 | 2654.9568 | 2555 | 2655 |
| 20 | | V min.= 6.9 | 2555.0505 | 2654.9583 | 2555 |
| 20 | V max.= 8.5 | 2555.0545 | 2654.9584 | 2555 | 2655 |

LTE Band 66:

| Low Channel & High Channel (QPSK) /Channel Bandwidth:20MHz | | | | | |
|--|--------------------|----------------|----------------|----------------------|----------------------|
| Temperature | Power Supplied | F _L | F _H | F _L Limit | F _H Limit |
| (°C) | (V _{DC}) | (MHz) | (MHz) | (MHz) | (MHz) |
| -30 | 7.7 | 1710.953 | 1779.9548 | 1710 | 1780 |
| -20 | | 1710.9509 | 1779.9528 | 1710 | 1780 |
| -10 | | 1710.9557 | 1779.9536 | 1710 | 1780 |
| 0 | | 1710.9533 | 1779.9573 | 1710 | 1780 |
| 10 | | 1710.956 | 1779.9512 | 1710 | 1780 |
| 20 | | 1710.9554 | 1779.9503 | 1710 | 1780 |
| 30 | | 1710.9526 | 1779.9578 | 1710 | 1780 |
| 40 | | 1710.95 | 1779.9576 | 1710 | 1780 |
| 50 | | 1710.9511 | 1779.9512 | 1710 | 1780 |
| 20 | | V min.= 6.9 | 1710.9511 | 1779.9552 | 1710 |
| 20 | V max.= 8.5 | 1710.9515 | 1779.9508 | 1710 | 1780 |

| Low Channel & High Channel (16-QAM) /Channel Bandwidth:20MHz | | | | | |
|--|--------------------|----------------|----------------|----------------------|----------------------|
| Temperature | Power Supplied | F _L | F _H | F _L Limit | F _H Limit |
| (°C) | (V _{DC}) | (MHz) | (MHz) | (MHz) | (MHz) |
| -30 | 7.7 | 1710.9536 | 1779.9521 | 1710 | 1780 |
| -20 | | 1710.9504 | 1779.9509 | 1710 | 1780 |
| -10 | | 1710.9507 | 1779.9587 | 1710 | 1780 |
| 0 | | 1710.9546 | 1779.9505 | 1710 | 1780 |
| 10 | | 1710.9557 | 1779.9501 | 1710 | 1780 |
| 20 | | 1710.9557 | 1779.9557 | 1710 | 1780 |
| 30 | | 1710.9547 | 1779.9506 | 1710 | 1780 |
| 40 | | 1710.9531 | 1779.9554 | 1710 | 1780 |
| 50 | | 1710.9547 | 1779.9541 | 1710 | 1780 |
| 20 | | V min.= 6.9 | 1710.9539 | 1779.9597 | 1710 |
| 20 | V max.= 8.5 | 1710.9549 | 1779.9586 | 1710 | 1780 |

Declarations

1: BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

2: Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

3: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

4: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

5: This report cannot be reproduced except in full, without prior written approval of the Company.

6: This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

******* END OF REPORT *******