



TEST REPORT

No. I19D00121-SRD07

For

Client: Shanghai Sunmi Technology Co.,Ltd.

Production: Smart POS system

Model Name: T6900

Brand Name: SUNMI

FCC ID : 2AH25T6900

Hardware Version: B1691_MAIN_PCB

Software Version: V1.0.1

Issued date: 2019-08-28

NOTE

1. The test results in this test report relate only to the devices specified in this report.
2. This report shall not be reproduced except in full without the written approval of East China Institute of Telecommunications.
3. KDB 789033 standard has not been accredited by A2LA.
4. For the test results, the uncertainty of measurement is not taken into account when judging the compliance with specification, and the results of measurement or the average value of measurement results are taken as the criterion of the compliance with specification directly.

Test Laboratory:

East China Institute of Telecommunications

Add: 7-8F, G Area, No.668, Beijing East Road, Huangpu District, Shanghai, P. R. China

Tel: +86 21 63843300

FAX: +86 21 63843301

E-Mail: welcome@ecit.org.cn

Revision Version

Report Number	Revision	Date	Memo
I19D00121-SRD07	00	2019-08-28	Initial creation of test report

CONTENTS

1. TEST LABORATORY	6
1.1. TESTING LOCATION	6
1.2. TESTING ENVIRONMENT	6
1.3. PROJECT DATA	6
1.4. SIGNATURE	6
2. CLIENT INFORMATION	7
2.1. APPLICANT INFORMATION	7
2.2. MANUFACTURER INFORMATION	7
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	8
3.1. ABOUT EUT	8
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	8
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	8
4. REFERENCE DOCUMENTS	9
4.1. DOCUMENTS SUPPLIED BY APPLICANT	9
4.2. REFERENCE DOCUMENTS FOR TESTING	9
5. TEST RESULTS	10
5.1. SUMMARY OF TEST RESULTS	10
5.2. STATEMENTS	11
6. TEST EQUIPMENTS UTILIZED	12
6.1. CONDUCTED TEST SYSTEM	12
6.2. RADIATED EMISSION TEST SYSTEM	12
7. MEASUREMENT UNCERTAINTY	13
8. TEST ENVIRONMENT	14
ANNEX A. DETAILED TEST RESULTS	15
ANNEX A.1. MEASUREMENT METHOD	15

ANNEX A.2.	MAXIMUM OUTPUT POWER.....	16
ANNEX A.3.	PEAK POWER SPECTRAL DENSITY (CONDUCTED)	18
ANNEX A.4.	OCCUPIED 26DB BANDWIDTH(CONDUCTED)	27
ANNEX A.5.	99% OCCUPIED BANDWIDTH(CONDUCTED).....	36
ANNEX A.6.	BAND EDGES COMPLIANCE	45
ANNEX A.7.	TRANSMITTER SPURIOUS EMISSION	65
ANNEX A.8.	CONDUCTED EMISSION (150KHZ- 30MHZ).....	94
ANNEX B.	ACCREDITATION CERTIFICATE	96

1. Test Laboratory

1.1. Testing Location

Company Name	East China Institute of Telecommunications
Address	7-8/F., Area G, No.668, Beijing East Road, Shanghai, China
Postal Code	200001
Telephone	+86 21 63843300
Fax	+86 21 63843301
FCC registration No	CN1177

1.2. Testing Environment

Normal Temperature	15°C-35°C
Relative Humidity	20%-75%

1.3. Project Data

Project Leader	Chen Minfei
Testing Start Date	2019-08-06
Testing End Date	2019-08-08


1.4. Signature



Wang Liang
 (Prepared this test report)



Fan Songyan
 (Reviewed this test report)



Zheng Zhongbin
 (Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 605, Block 7, KIC Plaza, No.388 Song Hu Road, Yang Pu District, Shanghai, China
Telephone	86-18721763396
Postcode	/

2.2. Manufacturer Information

Company Name	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 605, Block 7, KIC Plaza, No.388 Song Hu Road, Yang Pu District, Shanghai, China
Telephone	86-18721763396
Postcode	/

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Production	Smart POS system
Model name	T6900
WLAN (5G)	802.11 a/n20/n40
Frequency Range	ISM Bands: 5150MHz-5250MHz
WLAN type of modulation	OFDM
Extreme Temperature	0/+45°C
Nominal Voltage	7.6V
Extreme High Voltage	8.7V
Extreme Low Voltage	6.8V
Maximum of Antenna Gain	WIFI5Ghz: 1.15dBi

Note:

- Photographs of EUT are shown in ANNEX A of this test report.
- The value of the antenna gain is provided by the customer. For specific antenna information, please check the antenna specifications of the customer.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
N02	865150030742925	B1691_MAIN_PCB	V1.0.1	2019-08-06
	865150030742926			
N04	865150030742925	B1691_MAIN_PCB	V1.0.1	2019-08-06
	865150030742926			

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Type	Manufacturer
AE1	RF cable	---	AE1

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Documents supplied by applicant

All technical documents are supplied by the client or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices	2018-10-01
ANSI 63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2013
KDB 789033	Information Infrastructure (U-NII) Devices - Part 15, Subpart E	2017
KDB 905462	COMPLIANCE MEASUREMENT PROCEDURES FOR UNLICENSED-NATIONAL INFORMATION INFRASTRUCTURE DEVICES OPERATING IN THE 5250-5350 MHz AND 5470-5725 MHz BANDS INCORPORATING DYNAMIC FREQUENCY SELECTION	2016

5. Test Results

5.1. Summary of Test Results

Measurement Items	Sub-clause of Part15C	Verdict
Maximum Output Power	15.407	P
Power Spectral Density	15.407	P
99% Occupied Bandwidth	15.407	P
Band edge compliance	15.407	P
Transmitter spurious emissions radiated	15.407	P
Spurious emissions radiated < 30 MHz	15.407	P
Spurious emissions conducted < 30 MHz	15.407	P
Peak Excursion	15.407	P
Frequency Stability	15.407	P
Transmit Power Control	15.407	P

Note: Please refer to section 6 for detail; please refer to Annex A in this test report for the detailed test results.

The following terms are used in the above table.

P	Pass, the EUT complies with the essential requirements in the standard.
NP	Not Perform, the test was not performed by ECIT.
NA	Not Applicable, the test was not applicable.
F	Fail, the EUT does not comply with the essential requirements in the standard.

Test Conditions

Tnom	Normal Temperature
Tmin	Low Temperature
Tmax	High Temperature
Vnom	Normal Voltage
Vmin	Low Voltage

Vmax	High Voltage
Hnom	Norm Humidity
Anom	Norm Air Pressure

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

Temperature	Tnom	25°C
Voltage	Vnom	7.6V
Humidity	Hnom	48%
Air Pressure	Anom	1010hPa

5.2. Statements

The T6900 is an initial product for testing.

ECIT only performed test cases which identified with P/NP/NA/F results in Annex A.

ECIT has verified that the compliance of the tested device specified in section 3 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 4 of this test report.

6. Test Equipments Utilized

6.1. Conducted Test System

Item	Instrument Name	Type	SN	Manufacturer	Cal. Date	Cal. interval
1	Vector Signal Analyzer	FSQ40	200063	R&S	2019-05-10	1 year
2	DC Power Supply	ZUP60-14	LOC-220Z006-0007	TDL-Lambda	2019-05-10	1 year
3	Universal Radio Communication Tester	CMW500	104178	R&S	2019-05-10	1 year

6.2. Radiated Emission Test System

Item	Instrument Name	Type	SN	Manufacturer	Cal. Date	Cal. interval
1	Universal Radio Communication Tester	CMU200	123123	R&S	2019-05-10	1 year
2	EMI Test Receiver	ESU40	100307	R&S	2019-05-10	1 year
3	TRILOG Broadband Antenna	VULB9163	VULB9163-515	Schwarzbeck	2017-02-25	3 years
4	Double-ridged Waveguide Antenna	ETS-3117	00135890	ETS	2017-01-11	3 years
5	2-Line V-Network	ENV216	101380	R&S	2019-05-10	1 year
6	Loop Antenna	AL-130R	121083	COM-POWER	2016-11-21	3 years

Anechoic chamber

Fully anechoic chamber by ETS.

7. Measurement Uncertainty

Measurement uncertainty for all the testing in this report are within the limit specified in ECIT documents . The detailed measurement uncertainty is defined in ECIT documents.

Measurement Items	Range	Confidence Level	Calculated Uncertainty
Peak Output Power-Conducted	5100MHz-5850MHz	95%	$\pm 1.024\text{dB}$
Peak Power Spectral Density	5100MHz-5850MHz	95%	$\pm 1.024\text{dB}$
Occupied 6dB Bandwidth	5100MHz-5850MHz	95%	$\pm 62.04\text{Hz}$
Frequency Band Edges-Conducted	5100MHz-5850MHz	95%	$\pm 1.024\text{dB}$
Conducted Emission	30MHz-2GHz	95%	$\pm 0.90\text{dB}$
Conducted Emission	2GHz-3.6GHz	95%	$\pm 0.88\text{dB}$
Conducted Emission	3.6GHz-8GHz	95%	$\pm 0.96\text{dB}$
Conducted Emission	8GHz-20GHz	95%	$\pm 0.94\text{dB}$
Conducted Emission	20GHz-22GHz	95%	$\pm 0.88\text{dB}$
Conducted Emission	22GHz-26GHz	95%	$\pm 0.86\text{dB}$
Transmitter Spurious Emission-Radiated	9KHz-30MHz	95%	$\pm 5.66\text{dB}$
Transmitter Spurious Emission-Radiated	30MHz-1000MHz	95%	$\pm 4.98\text{dB}$
Transmitter Spurious Emission-Radiated	1000MHz -18000MHz	95%	$\pm 5.06\text{dB}$
Transmitter Spurious Emission-Radiated	18000MHz -40000MHz	95%	$\pm 5.20\text{dB}$
AC Power line Conducted Emission	0.15MHz-30MHz	95%	$\pm 3.66\text{ dB}$

8. Test Environment

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Ground system resistance	< 0.5 Ω

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1 (6.9 meters×10.9 meters×5.4 meters) did not exceed following limits along the EMC testing:


Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB,30MHz to 1GHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

ANNEX A. Detailed Test Results

ANNEX A.1. Measurement Method


A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

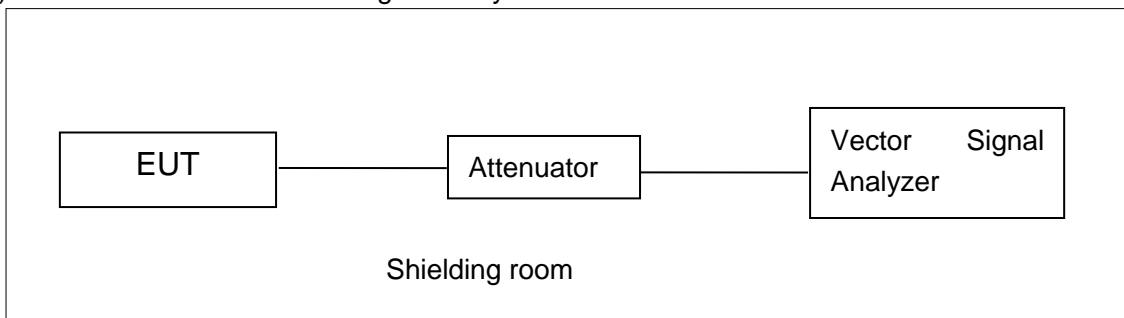

A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,
 Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;
 Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

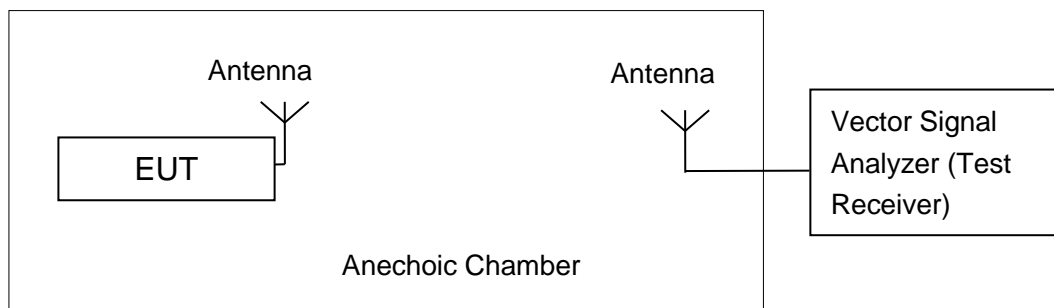

The measurement is made according to KDB 789033

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

ANNEX A.2. Maximum output Power

Measurement Limit and Method:

Standard	Frequency (MHz)	Limit (dBm)
FCC CRF Part 15.407(a)	5150MHz~5250MHz	24dBm
	5250MHz~5350MHz	24dBm or 11+10logB
	5470MHz~5725MHz	24dBm or 11+10logB

Limit use the less value, and B is the 26dB bandwidth.

The measurement method SA-1 is made according to KDB 789033.

Set the spectrum analyzer in the following:

Detector: RMS.

RBW=1MHz.

VBW=3MHz.

Sweep time = AUTO.

Span:30MHz (for 20MHz); 50MHz (for 40MHz).

Measurement Results:

802.11a mode U-NII-1

Mode	Data Rate(Mbps)	Teat Result(dBm)		
		5180MHz	5200MHz	5240MHz
802.11a	6	13.35	12.86	12.79

The data rate 6Mbps is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT20 mode U-NII-1

Mode	Data Rate(Index)	Teat Result(dBm)		
		5180MHz	5200MHz	5240MHz
802.11n(20MHz)	MCS0	13.38	12.85	12.87

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT40 mode U-NII-1

Mode	Data Rate(Index)	Teat Result(dBm)		
		5190MHz	/	5230MHz
802.11n(40MHz)	MCS0	13.27	/	13.18

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11a mode U-NII-2a

Mode	Data Rate(Mbps)	Teat Result(dBm)		
		5260MHz	5280MHz	5320MHz
802.11a	6	11.82	11.85	11.50

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT20 mode U-NII-2a

Mode	Data Rate(Index)	Teat Result(dBm)		
		5260MHz	5280MHz	5320MHz
802.11n(20MHz)	MCS0	11.58	11.90	11.57

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT40 mode U-NII-2a

Mode	Data Rate(Index)	Teat Result(dBm)		
		5270MHz	/	5310MHz
802.11n(40MHz)	MCS0	13.08	/	12.72

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

ANNEX A.3. Peak Power Spectral Density (conducted)

Measurement Limit:

Standard	Frequency (MHz)	Limit (dBm/MHz)
FCC CRF Part 15.407(a)	5150MHz~5250MHz	11
	5250MHz~5350MHz	11
	5470MHz~5725MHz	11

The output power measurement method SA-1 is made according to KDB 789033

Measurement Results:


U-NII-1:

Mode	Channel	Power Spectral Density (dBm/MHz)		Conclusion
		Fig.	Value	
802.11a	5180 MHz	Fig.1	4.217	P
	5200 MHz	Fig.2	3.317	P
	5240 MHz	Fig.3	3.482	P
802.11n HT20	5180 MHz	Fig.4	3.915	P
	5200 MHz	Fig.5	4.977	P
	5240 MHz	Fig.6	3.471	P
802.11n HT40	5190 MHz	Fig.7	-0.082	P
	5230 MHz	Fig.8	0.365	P

U-NII-2a:


Mode	Channel	Power Spectral Density (dBm/MHz)		Conclusion
		Fig.	Value	
802.11a	5260 MHz	Fig.9	4.709	P
	5280 MHz	Fig.10	4.738	P
	5320 MHz	Fig.11	5.105	P
802.11n HT20	5260 MHz	Fig.12	4.490	P
	5280 MHz	Fig.13	4.938	P
	5320 MHz	Fig.14	4.615	P
802.11n HT40	5270 MHz	Fig.15	1.653	P
	5310 MHz	Fig.16	1.563	P

Conclusion: PASS

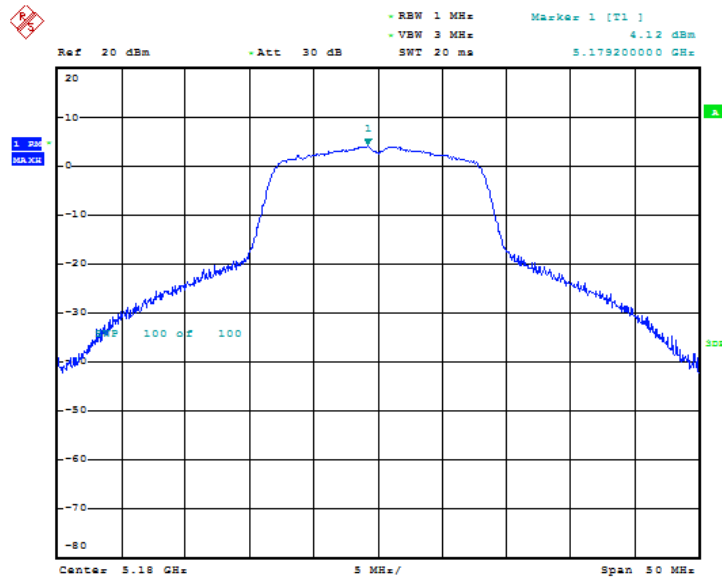


Date: 9.AUG.2019 03:43:54

Fig. 1 Power Spectral Density (802.11a, 5180MHz)

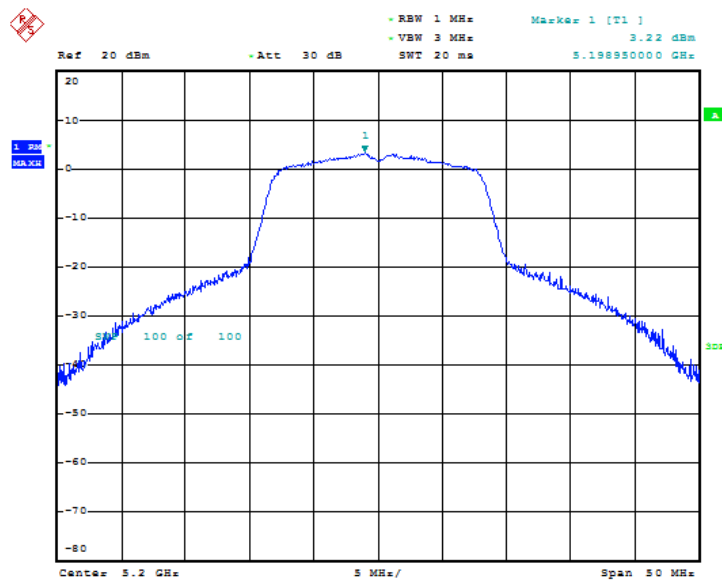


Date: 9.AUG.2019 03:44:54

Fig. 2 Power Spectral Density (802.11a, 5200MHz)

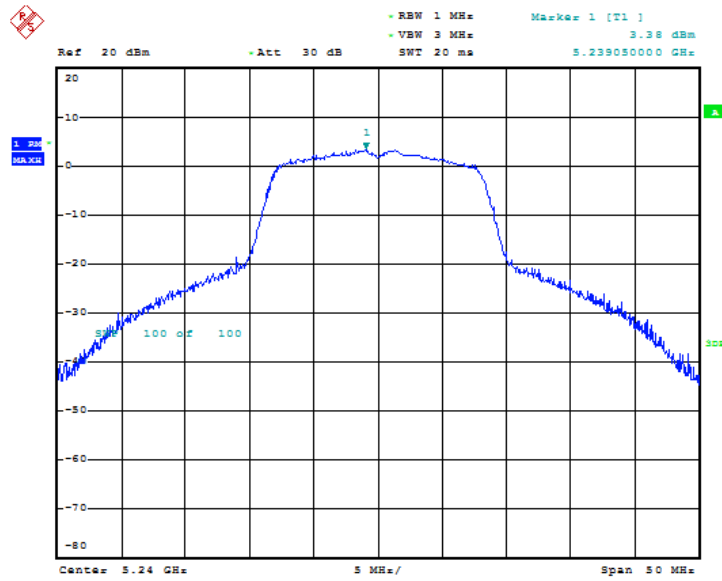


Date: 9.AUG.2019 03:45:47

Fig. 3 Power Spectral Density (802.11a, 5240MHz)

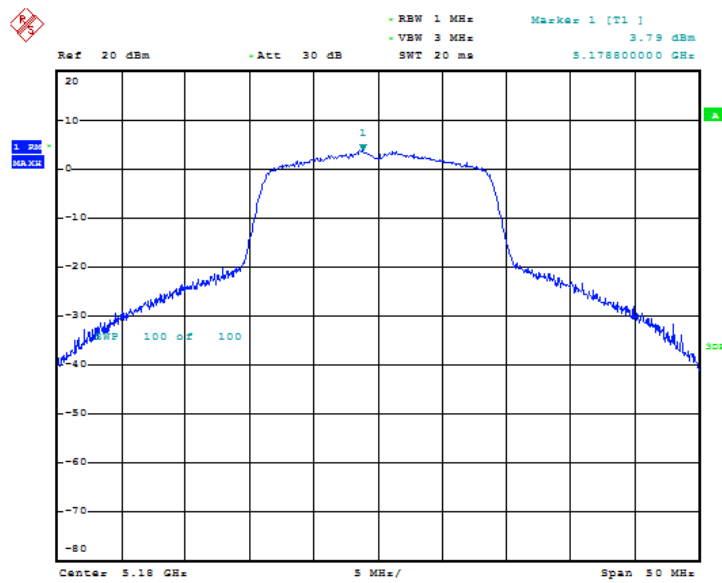


Date: 9.AUG.2019 03:47:03

Fig. 4 Power Spectral Density (802.11n-HT20, 5180MHz)

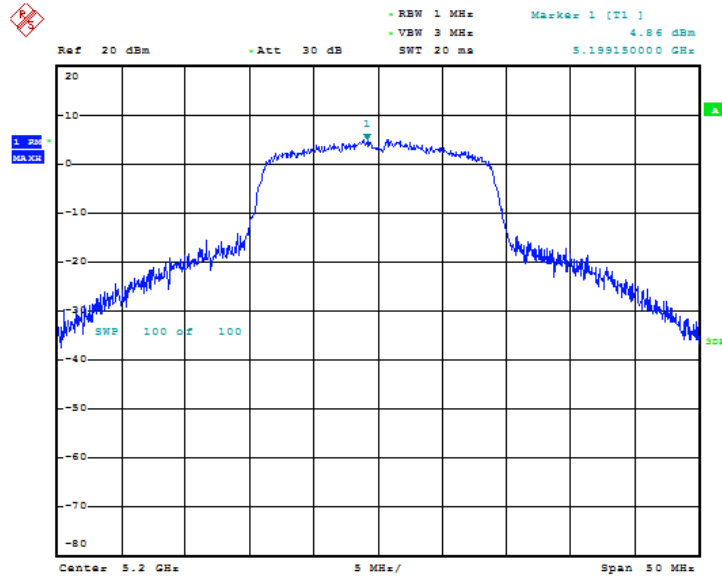


Date: 9.AUG.2019 03:47:56

Fig. 5 Power Spectral Density (802.11n-HT20, 5200MHz)

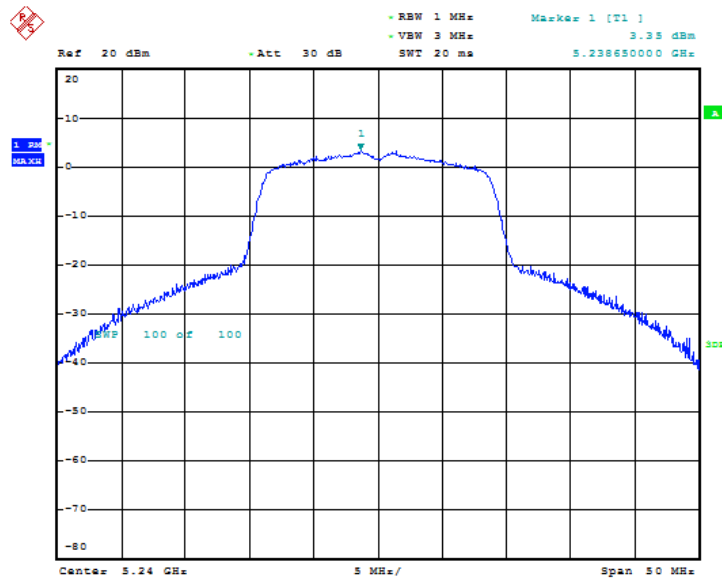


Date: 9.AUG.2019 03:48:47

Fig. 6 Power Spectral Density (802.11n-HT20, 5240MHz)

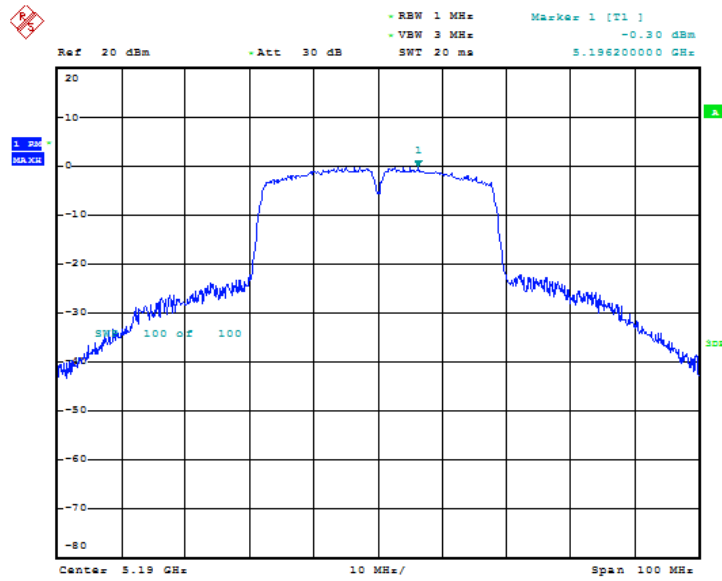


Date: 9.AUG.2019 03:50:07

Fig. 7 Power Spectral Density (802.11n-HT40, 5190MHz)

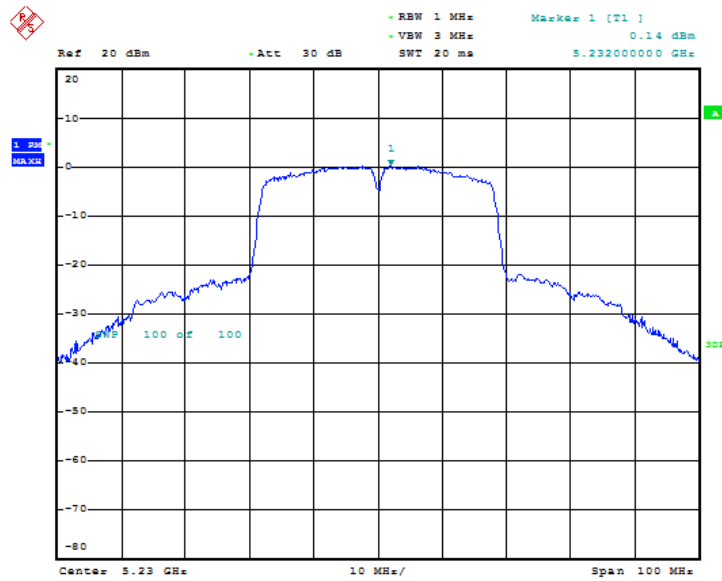


Date: 9.AUG.2019 03:50:57

Fig. 8 Power Spectral Density (802.11n-HT40, 5230MHz)

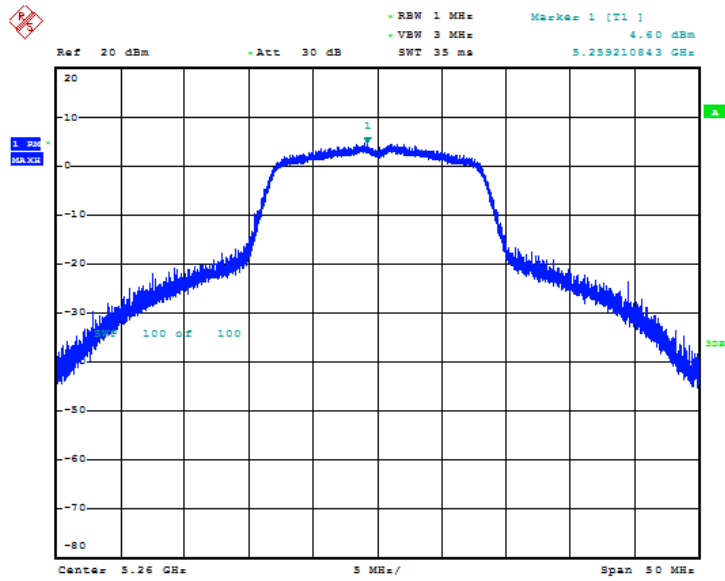


Date: 9.AUG.2019 05:20:50

Fig. 9 Power Spectral Density (802.11a, 5260MHz)

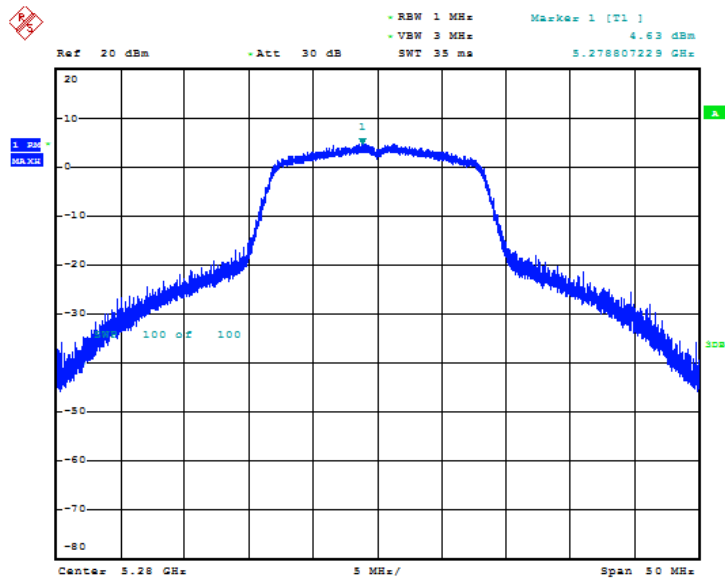


Date: 9.AUG.2019 05:21:55

Fig. 10 Power Spectral Density (802.11a, 5280MHz)

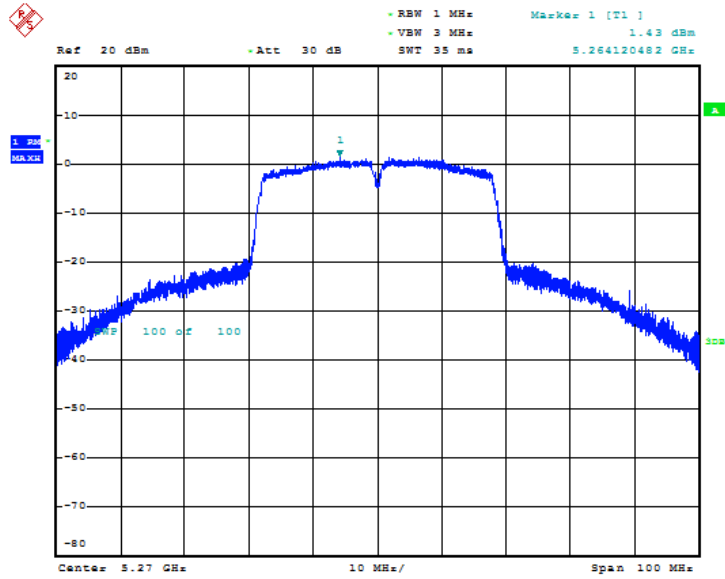

Date: 9.AUG.2019 05:27:35

Fig. 15 Power Spectral Density (802.11n-HT40, 5270MHz)

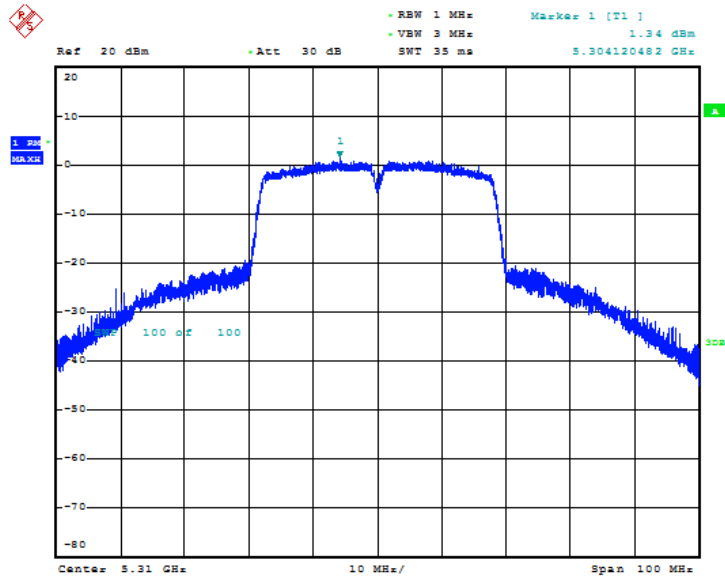

Date: 9.AUG.2019 05:28:51

Fig. 16 Power Spectral Density (802.11n-HT40, 5310MHz)

ANNEX A.4. Occupied 26dB Bandwidth(conducted)

Measurement Limit:

Standard	Limit (MHz)
FCC 47 CFR Part 15.403 (i)	/

The measurement is made according to KDB 789033

Measurement Result:

U-NII-1:


Mode	Channel	Occupied 26dB Bandwidth (MHz)		conclusion
802.11a	5180 MHz	Fig.17	31.17	P
	5200 MHz	Fig.18	31.73	P
	5240 MHz	Fig.19	29.81	P
802.11n HT20	5180 MHz	Fig.20	33.33	P
	5200 MHz	Fig.21	33.09	P
	5240 MHz	Fig.22	32.53	P
802.11n HT40	5190 MHz	Fig.23	67.31	P
	5230 MHz	Fig.24	57.85	P

U-NII-2a:

Mode	Channel	Occupied 26dB Bandwidth (MHz)		conclusion
802.11a	5260 MHz	Fig.25	28.53	P
	5280 MHz	Fig.26	27.40	P
	5320 MHz	Fig.27	27.24	P
802.11n HT20	5260 MHz	Fig.28	31.33	P
	5280 MHz	Fig.29	28.61	P
	5320 MHz	Fig.30	28.45	P
802.11n HT40	5270 MHz	Fig.31	62.50	P
	5310 MHz	Fig.32	62.02	P


Conclusion: PASS

Test graphs as below:

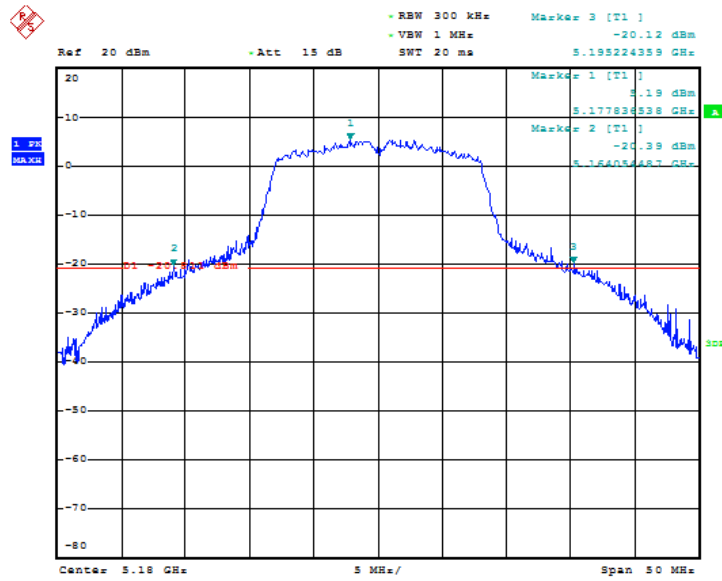


Date: 8.AUG.2019 07:18:26

Fig. 17 Occupied 26dB Bandwidth (802.11a, 5180MHz)

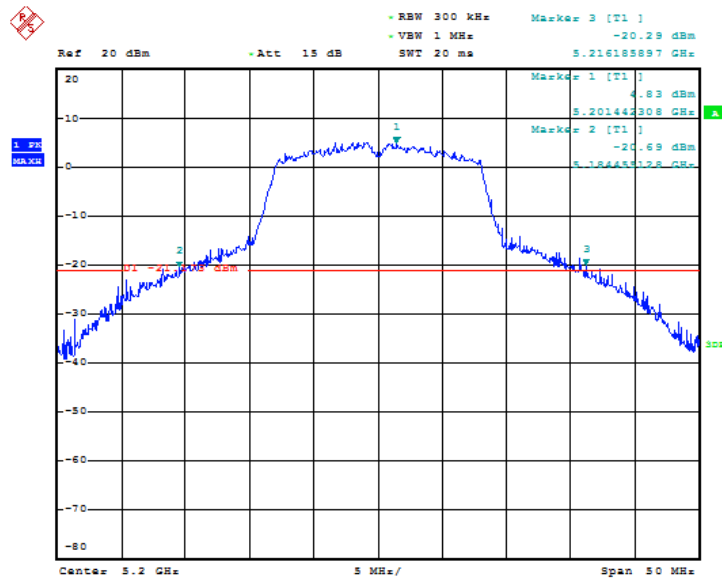


Date: 8.AUG.2019 07:19:09

Fig. 18 Occupied 26dB Bandwidth (802.11a, 5200MHz)

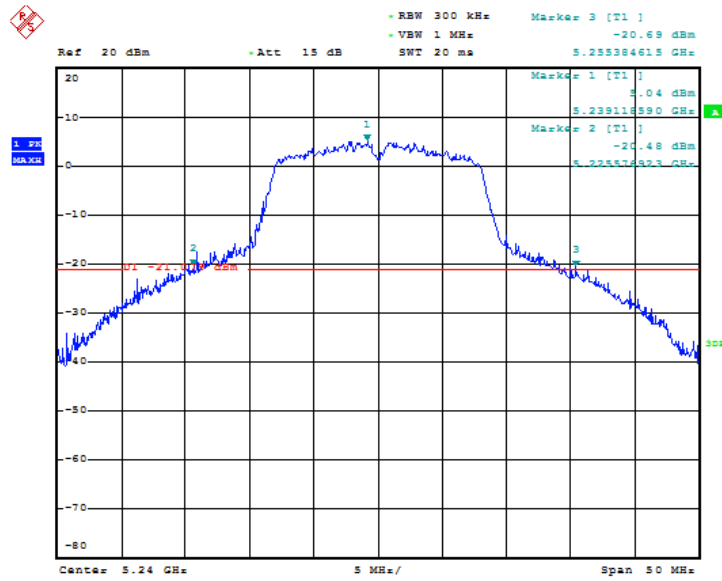


Date: 8.AUG.2019 07:19:54

Fig. 19 Occupied 26dB Bandwidth (802.11a, 5240MHz)

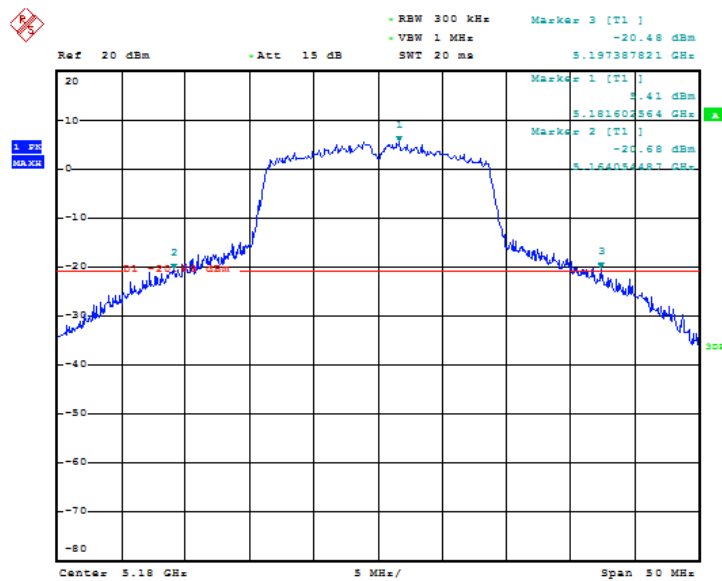


Date: 8.AUG.2019 06:57:01

Fig. 20 Occupied 26dB Bandwidth (802.11n-HT20, 5180MHz)

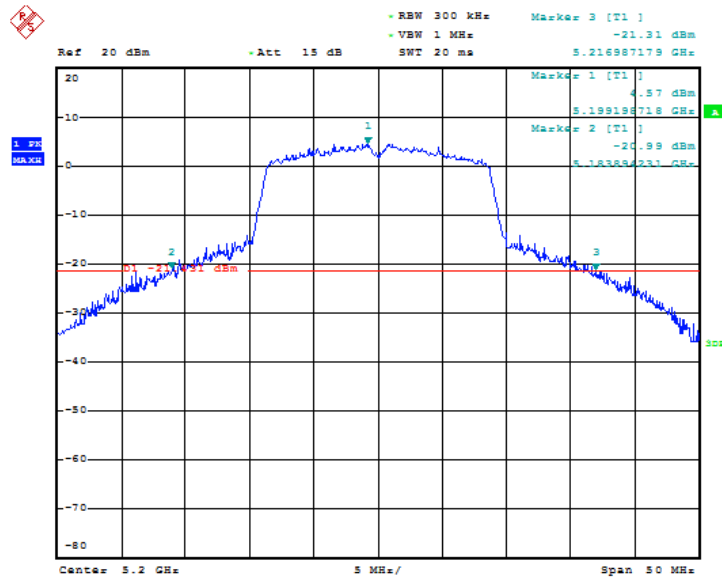


Date: 8.AUG.2019 06:57:40

Fig. 21 Occupied 26dB Bandwidth (802.11-HT20, 5200MHz)

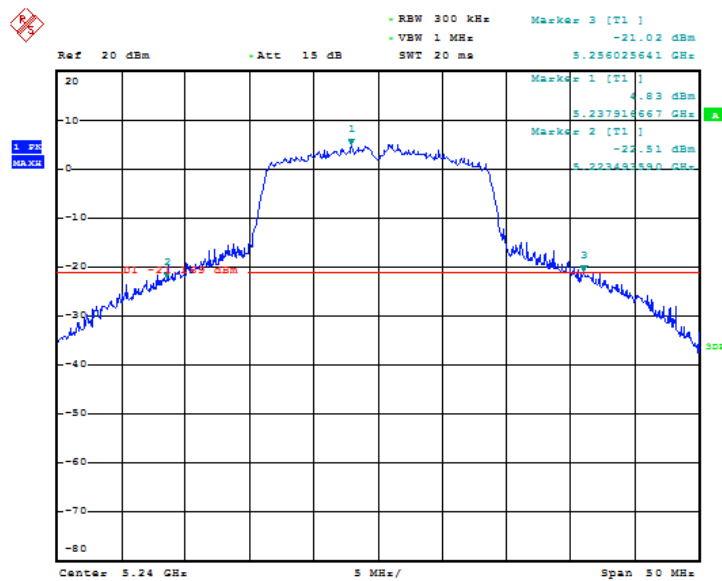


Date: 8.AUG.2019 06:58:22

Fig. 22 Occupied 26dB Bandwidth (802.11n-HT20, 5240MHz)

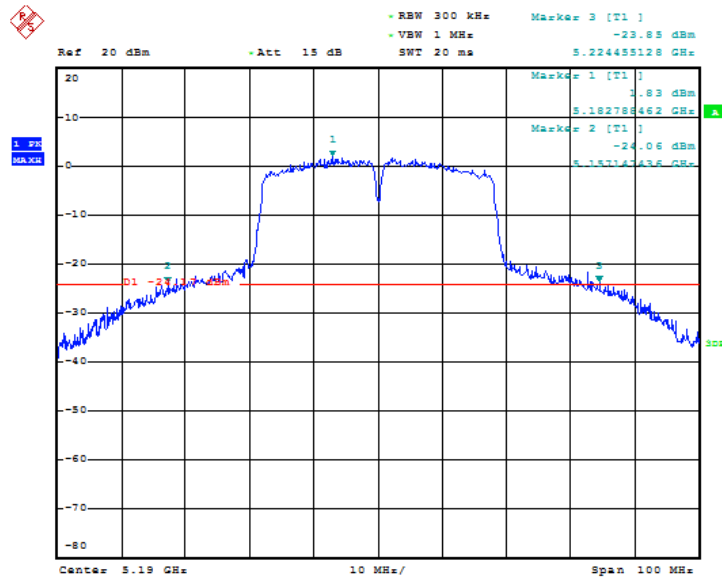


Date: 8.AUG.2019 06:59:29

Fig. 23 Occupied 26dB Bandwidth (802.11n-HT40, 5190MHz)

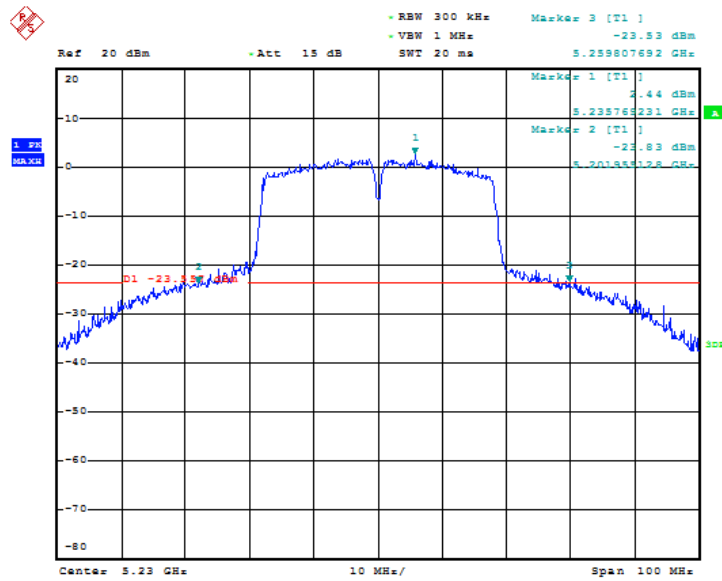


Date: 8.AUG.2019 07:00:09

Fig. 24 Occupied 26dB Bandwidth (802.11n-HT40, 5230MHz)

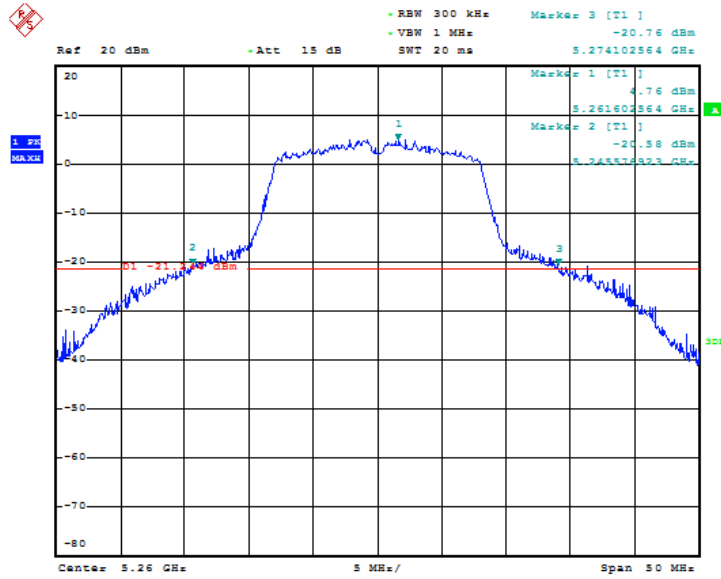


Date: 9.AUG.2019 04:21:46

Fig. 25 Occupied 26dB Bandwidth (802.11a, 5260MHz)

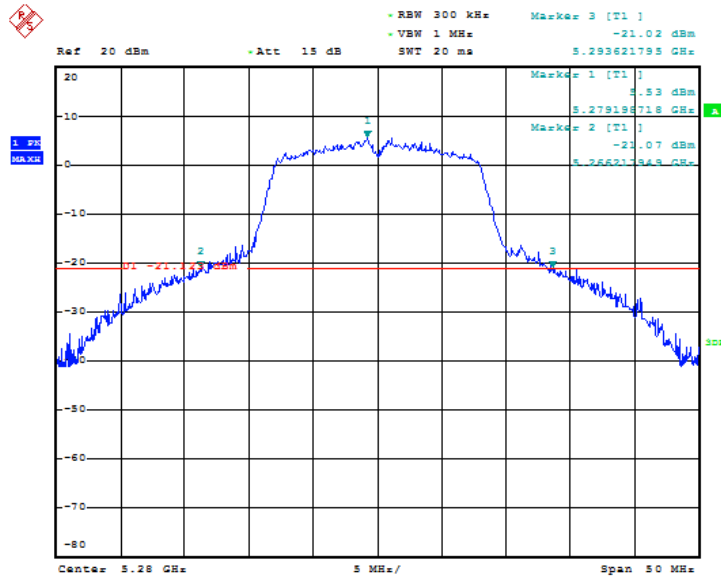


Date: 9.AUG.2019 04:23:17

Fig. 26 Occupied 26dB Bandwidth (802.11a, 5280MHz)

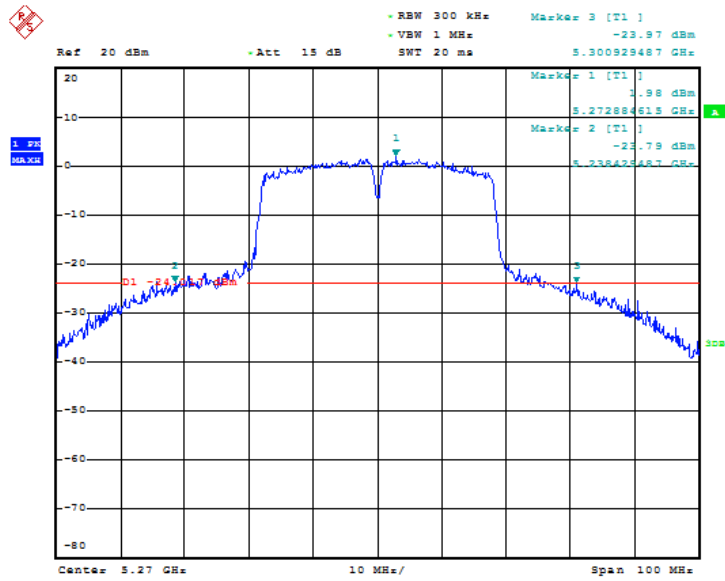

Date: 9.AUG.2019 04:27:58

Fig. 31 Occupied 26dB Bandwidth (802.11n-HT40, 5270MHz)

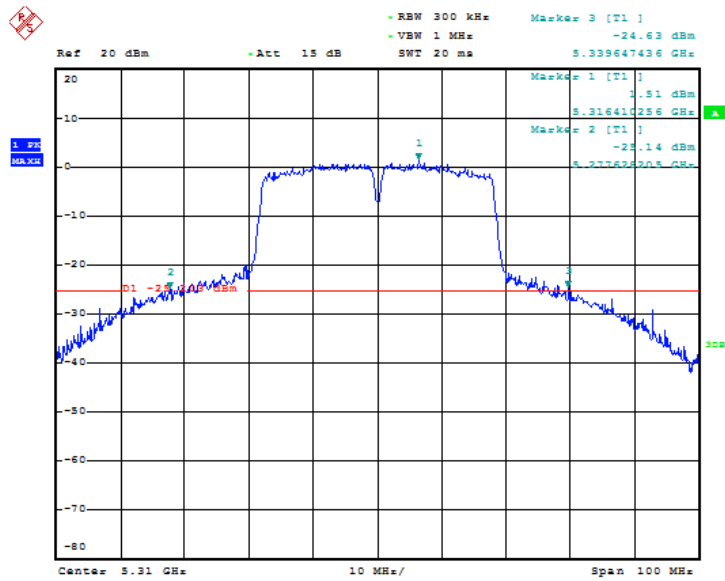

Date: 9.AUG.2019 04:28:44

Fig. 32 Occupied 26dB Bandwidth (802.11n-HT40, 5310MHz)

ANNEX A.5. 99% Occupied Bandwidth(conducted)

Measurement Limit:

Standard	Limit (MHz)
FCC 47 CFR Part 15.407 (e)	/

The measurement is made according to KDB 789033

Measurement Result:

U-NII-1:


Mode	Channel	99% Occupied Bandwidth (MHz)		conclusion
		Fig.	Value	
802.11a	5180 MHz	Fig.33	17.708	P
	5200 MHz	Fig.34	17.949	P
	5240 MHz	Fig.35	17.708	P
802.11n HT20	5180 MHz	Fig.36	18.429	P
	5200 MHz	Fig.37	18.670	P
	5240 MHz	Fig.38	18.349	P
802.11n HT40	5190 MHz	Fig.39	36.538	P
	5230 MHz	Fig.40	36.538	P

U-NII-2a:

Mode	Channel	99% Occupied Bandwidth (MHz)		conclusion
		Fig.	Value	
802.11a	5260 MHz	Fig.41	17.628	P
	5280 MHz	Fig.42	17.308	P
	5320 MHz	Fig.43	17.228	P
802.11n HT20	5260 MHz	Fig.44	18.429	P
	5280 MHz	Fig.45	18.189	P
	5320 MHz	Fig.46	18.189	P
802.11n HT40	5270 MHz	Fig.47	36.378	P
	5310 MHz	Fig.48	36.538	P


Conclusion: PASS

Test graphs as below:

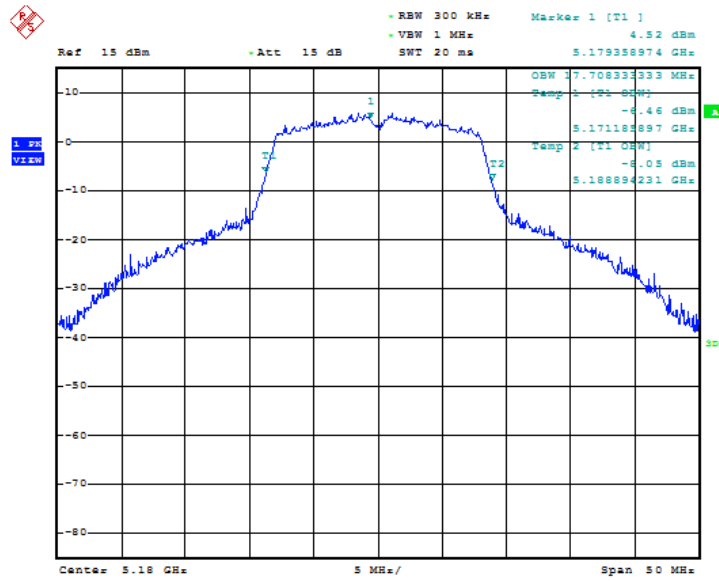


Date: 8.AUG.2019 07:09:36

Fig. 33 99% Occupied Bandwidth (802.11a, 5180MHz)

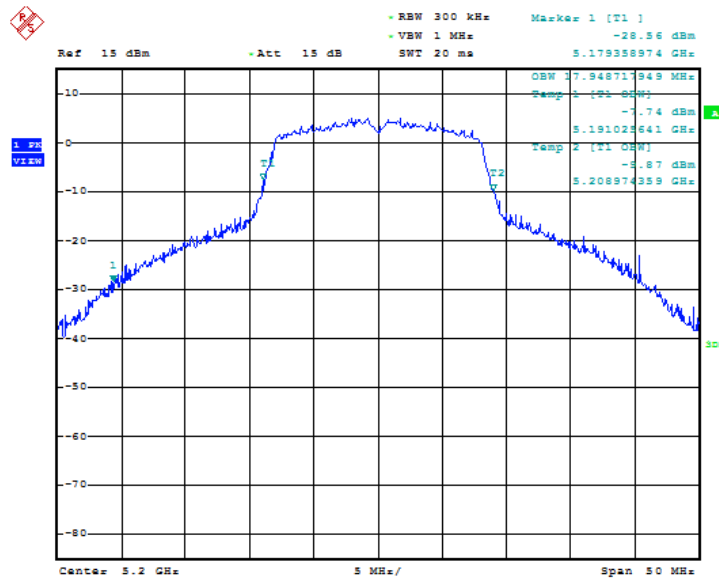


Date: 8.AUG.2019 07:10:28

Fig. 34 99% Occupied Bandwidth (802.11a, 5200MHz)

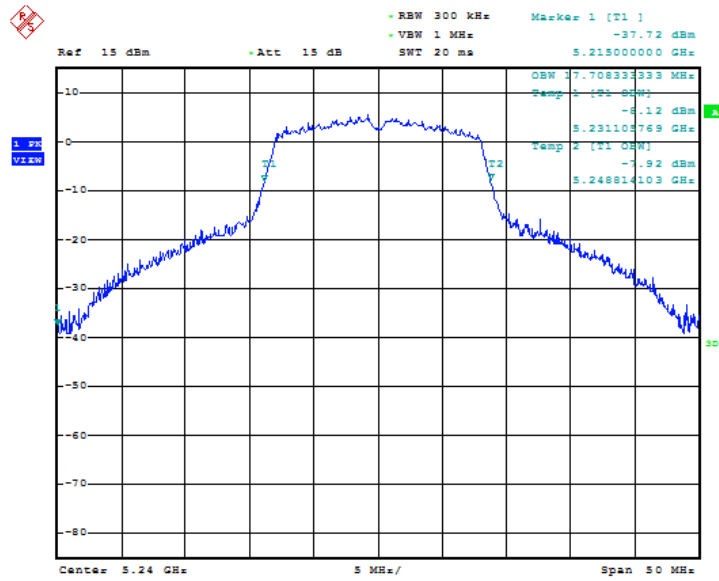


Date: 8.AUG.2019 07:11:20

Fig. 35 99% Occupied Bandwidth (802.11a, 5240MHz)

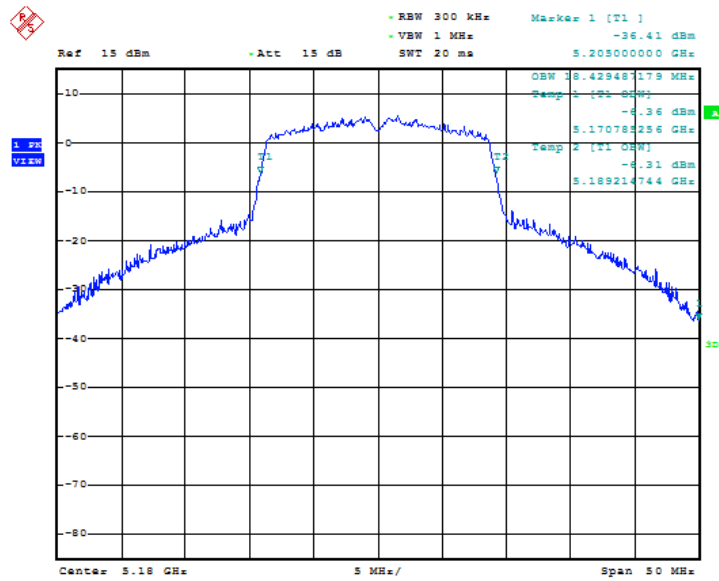


Date: 8.AUG.2019 07:12:31

Fig. 36 99% Occupied Bandwidth (802.11n-HT20, 5180MHz)

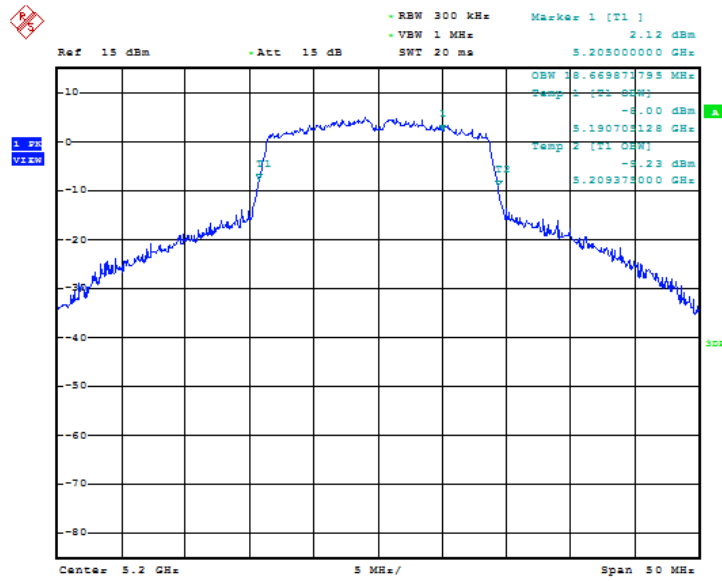


Date: 8.AUG.2019 07:13:24

Fig. 37 99% Occupied Bandwidth (802.11n-HT20, 5200MHz)

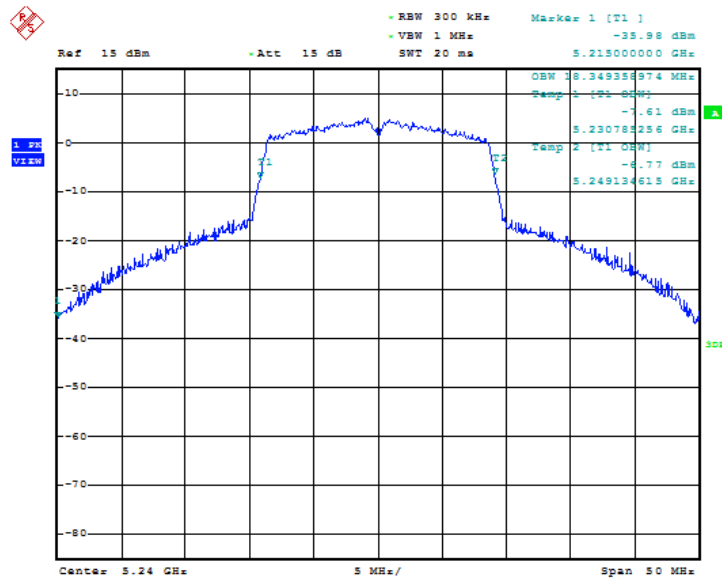


Date: 8.AUG.2019 07:14:33

Fig. 38 99% Occupied Bandwidth (802.11n-HT20, 5240MHz)

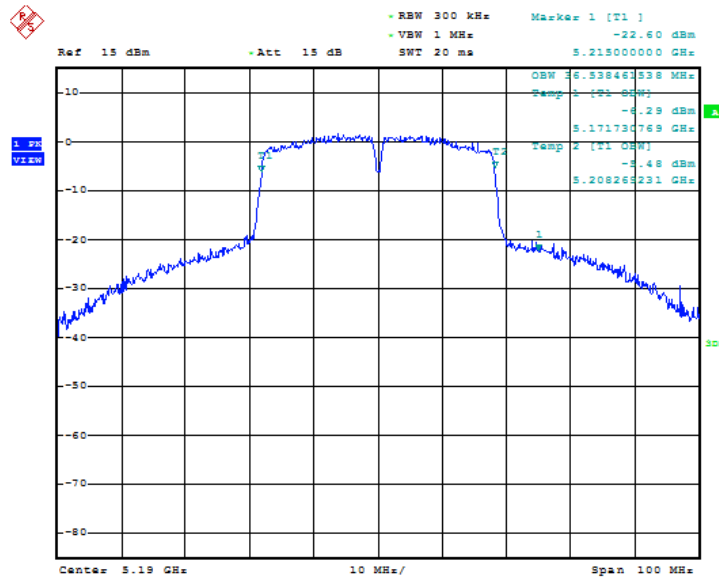


Date: 8.AUG.2019 07:15:45

Fig. 39 99% Occupied Bandwidth (802.11n-HT40, 5190MHz)

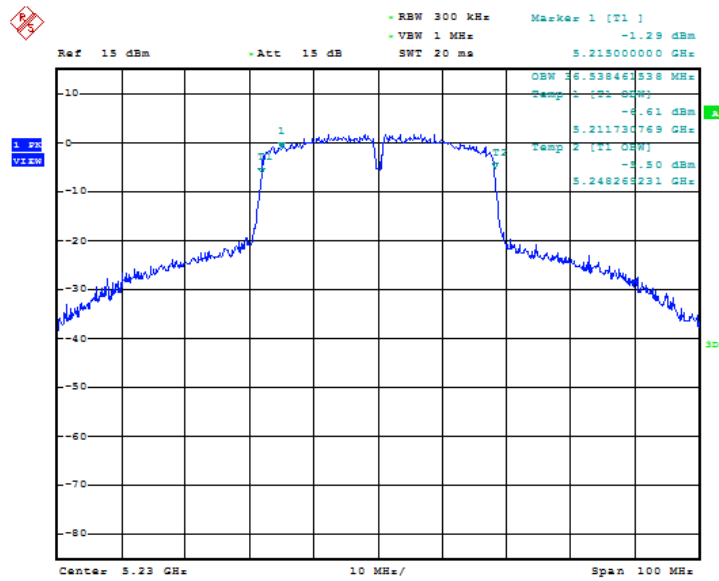


Date: 8.AUG.2019 07:16:53

Fig. 40 99% Occupied Bandwidth (802.11n-HT40, 5230MHz)

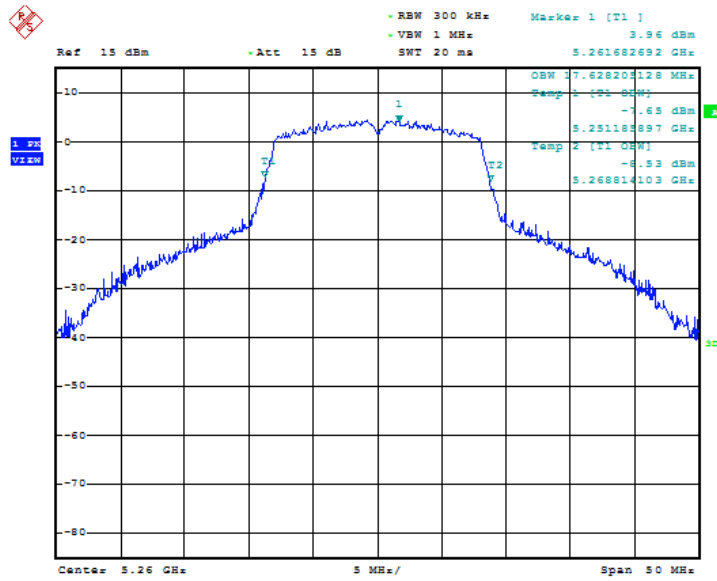


Date: 9.AUG.2019 04:32:48

Fig. 41 99% Occupied Bandwidth (802.11a, 5260MHz)

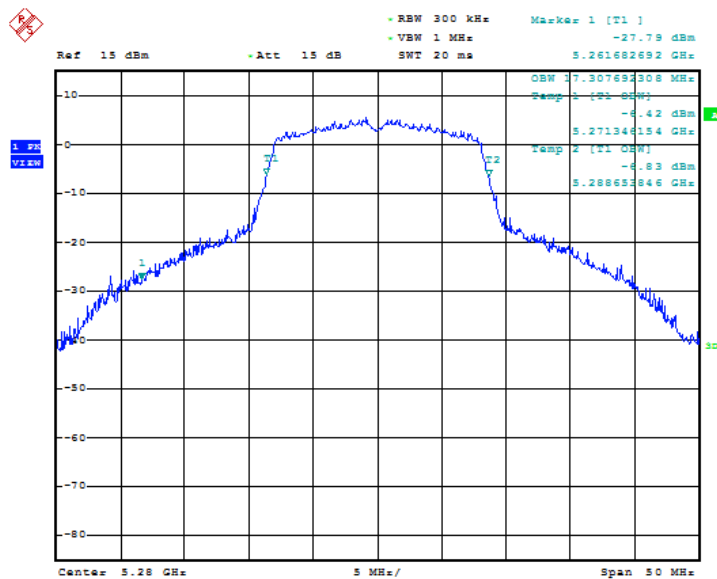


Date: 9.AUG.2019 04:34:02

Fig. 42 99% Occupied Bandwidth (802.11a, 5280MHz)

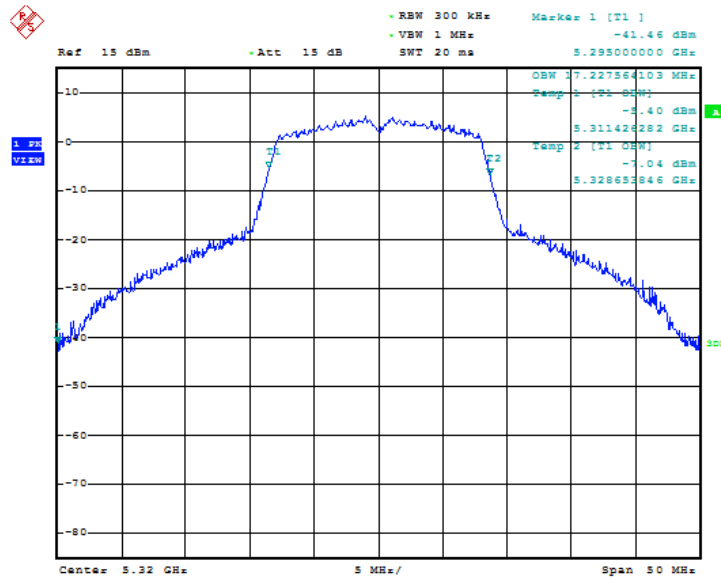


Date: 9.AUG.2019 04:35:13

Fig. 43 99% Occupied Bandwidth (802.11a, 5320MHz)

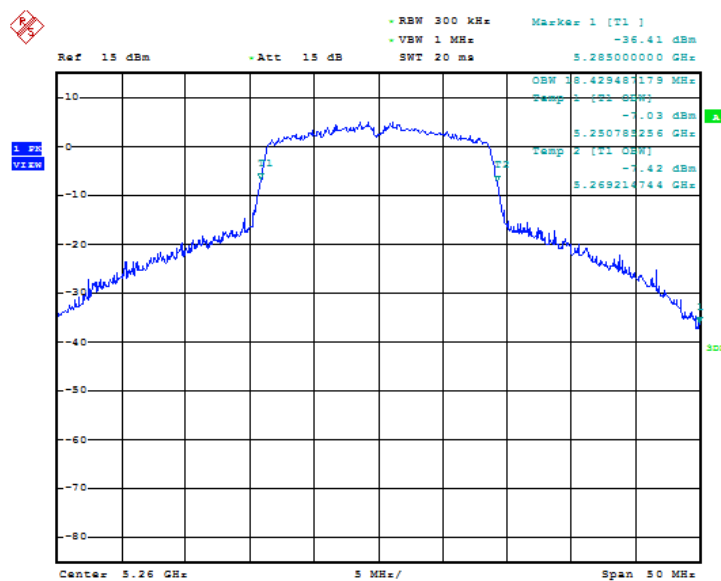


Date: 9.AUG.2019 04:36:51

Fig. 44 99% Occupied Bandwidth (802.11n-HT20, 5260MHz)

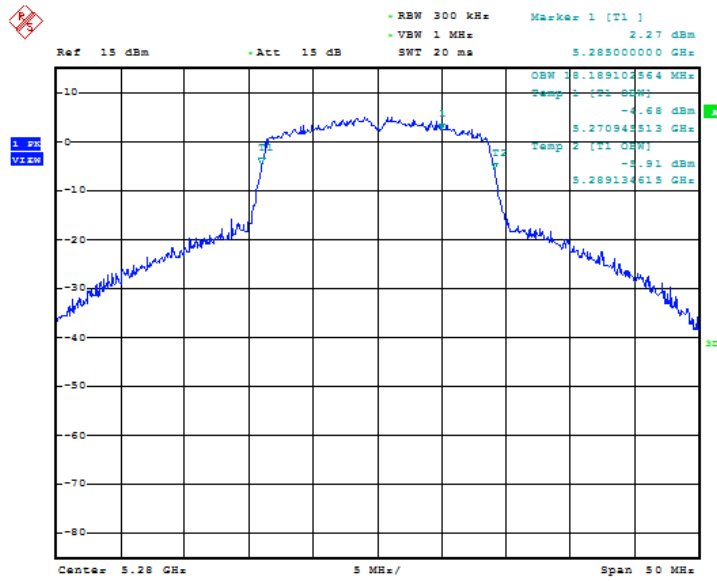


Date: 9.AUG.2019 04:37:45

Fig. 45 99% Occupied Bandwidth (802.11n-HT20, 5280MHz)

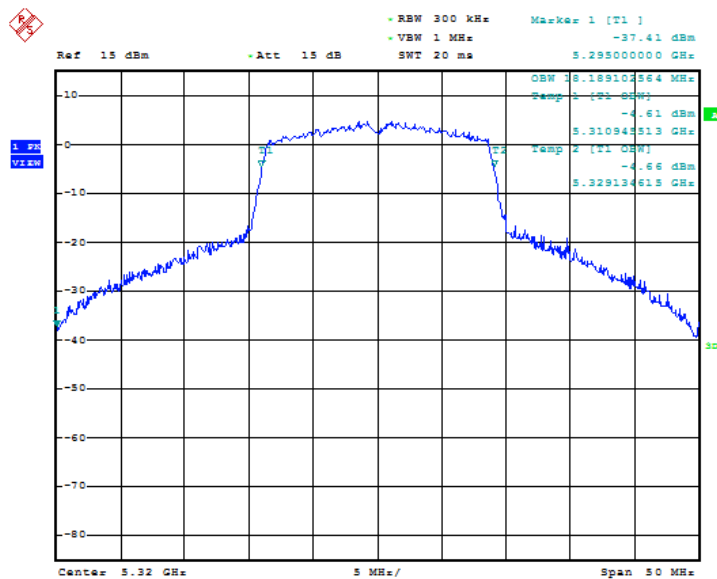


Date: 9.AUG.2019 04:39:40

Fig. 46 99% Occupied Bandwidth (802.11n-HT20, 5320MHz)

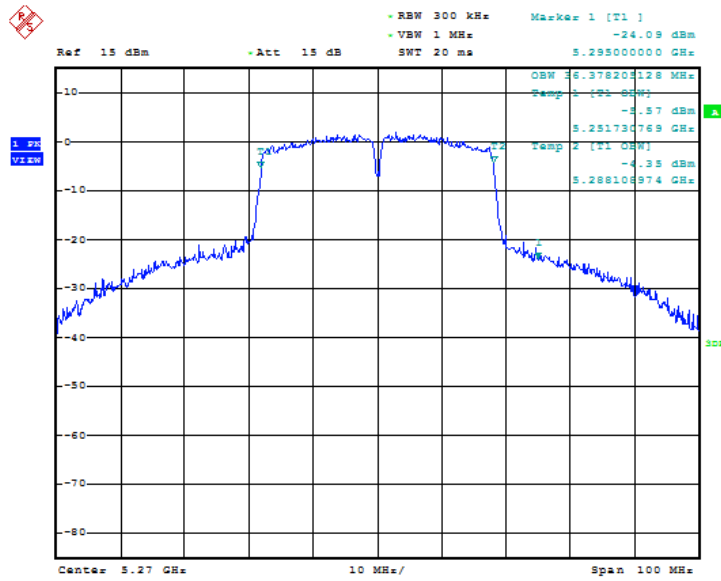

Date: 9.AUG.2019 04:41:01

Fig. 47 99% Occupied Bandwidth (802.11n-HT40, 5270MHz)

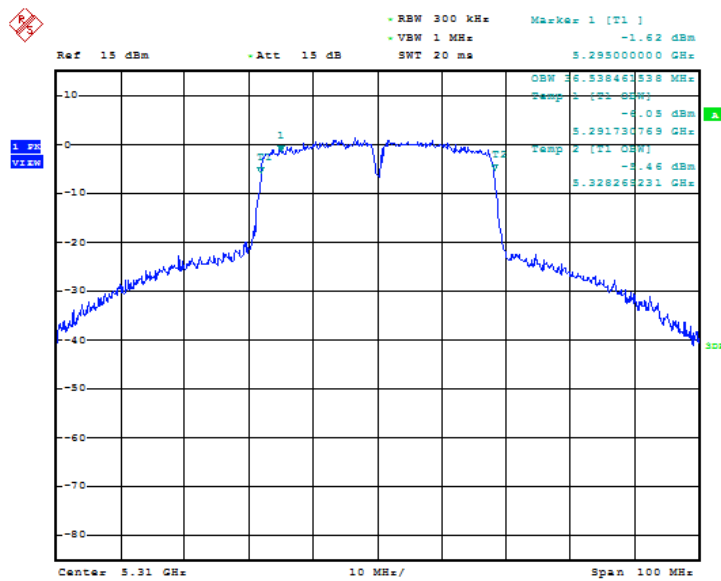

Date: 9.AUG.2019 04:43:32

Fig. 48 99% Occupied Bandwidth (802.11n-HT40, 5310MHz)

ANNEX A.6. Band Edges Compliance

A.6.1 Band Edges - conducted

Measurement Limit:

Standard	Limit (dBm/MHz)
FCC 47 CFR Part 15.407	< -27

The measurement is made according to KDB 789033

Measurement Result:

U-NII-1:


Mode	Channel	Test Results	Conclusion
802.11a	5180 MHz	Fig.49	P
	5240 MHz	Fig.50	P
802.11n HT20	5180 MHz	Fig.51	P
	5240 MHz	Fig.52	P
802.11n HT40	5190 MHz	Fig.53	P
	5230 MHz	Fig.54	P

U-NII-2a:

Mode	Channel	Test Results	Conclusion
802.11a	5260 MHz	Fig.55	P
	5320 MHz	Fig.56	P
802.11n HT20	5260 MHz	Fig.57	P
	5320 MHz	Fig.58	P
802.11n HT40	5270 MHz	Fig.59	P
	5310 MHz	Fig.60	P


Conclusion: PASS

Test graphs as below:

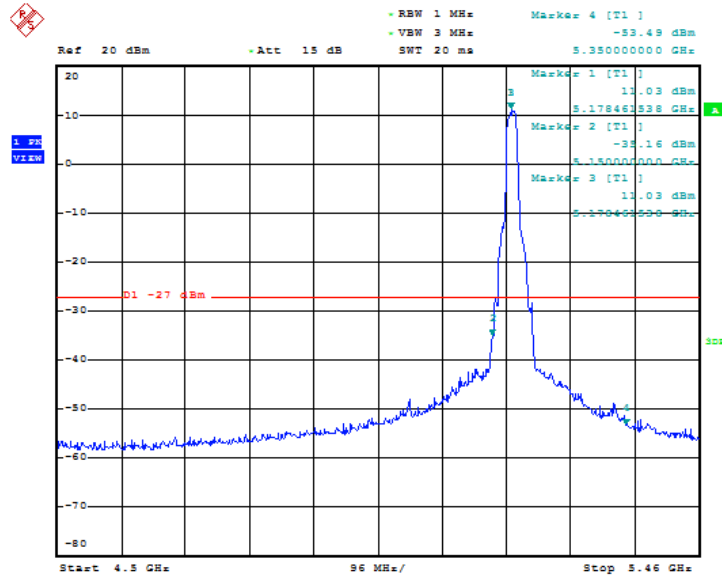


Date: 9.AUG.2019 03:56:38

Fig. 49 Band Edges (802.11a, 5180MHz)

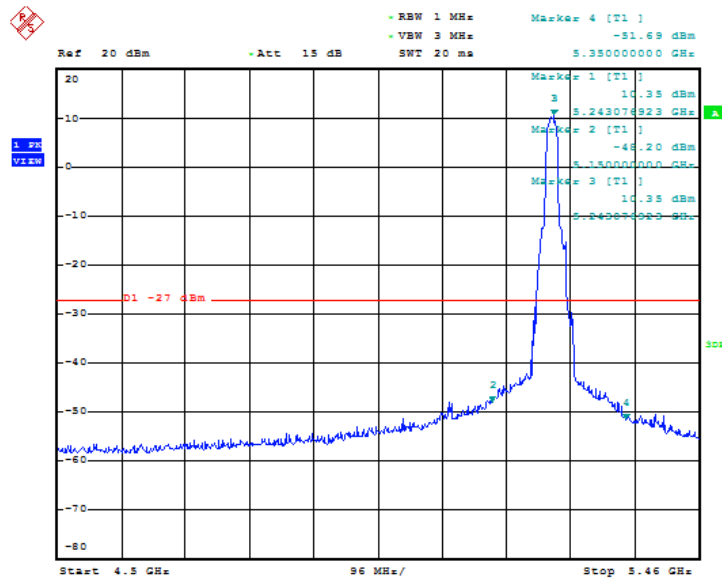


Date: 9.AUG.2019 04:02:24

Fig. 50 Band Edges (802.11a, 5240MHz)

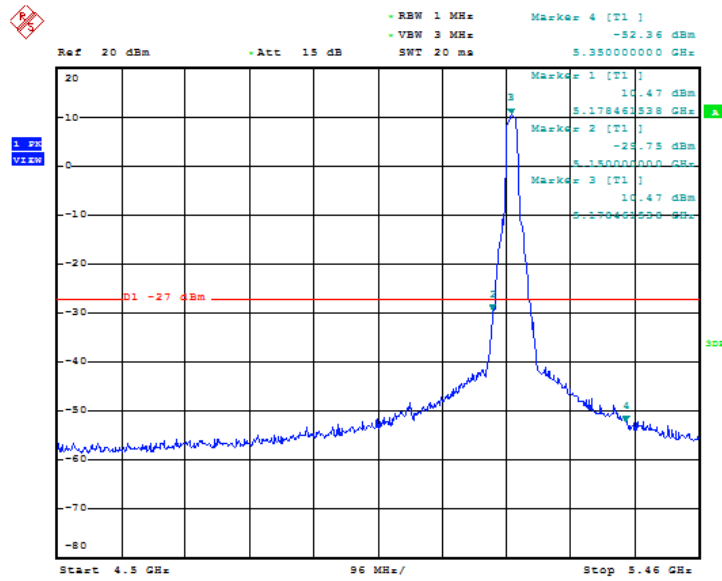


Date: 9.AUG.2019 04:05:17

Fig. 51 Band Edges (802.11n-HT20, 5180MHz)

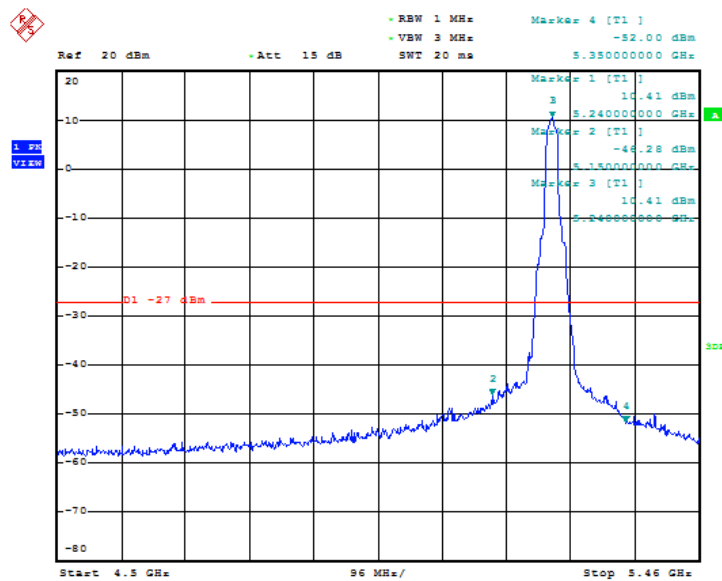


Date: 9.AUG.2019 04:10:31

Fig. 52 Band Edges (802.11n-HT20, 5240MHz)

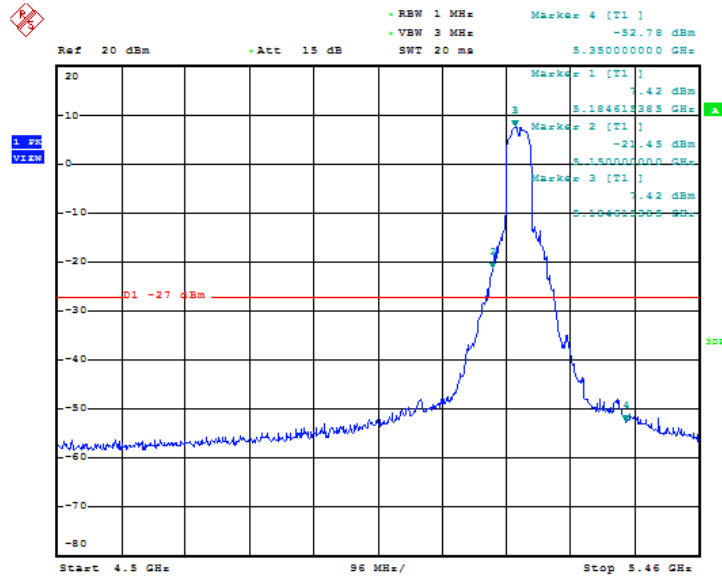


Date: 9.AUG.2019 04:13:33

Fig. 53 Band Edges (802.11n-HT40, 5190MHz)

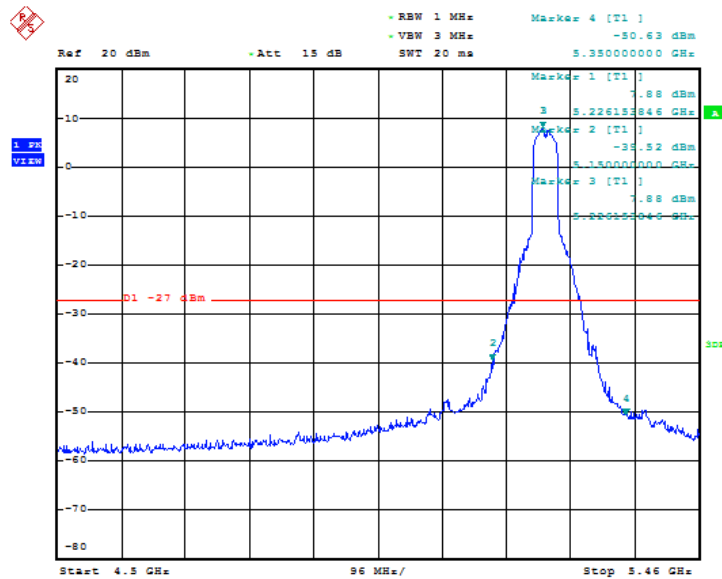


Date: 9.AUG.2019 04:16:52

Fig. 54 Band Edges (802.11n-HT40, 5230MHz)

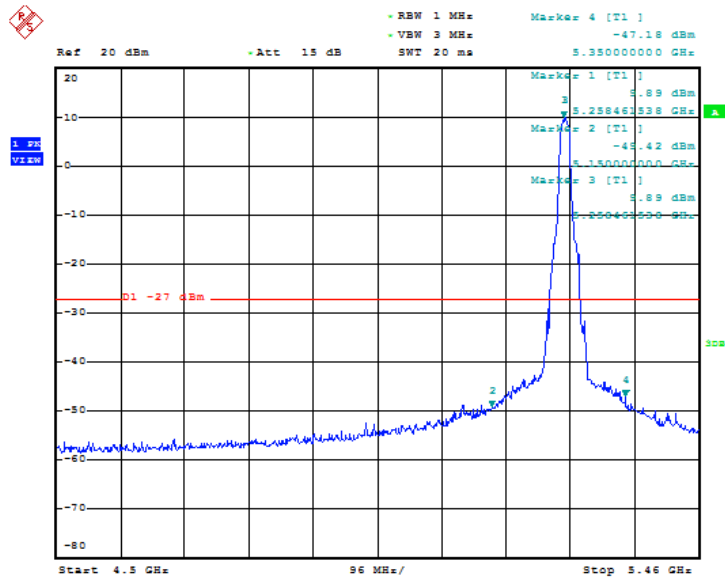


Date: 9.AUG.2019 05:35:20

Fig. 55 Band Edges (802.11a, 5260MHz)

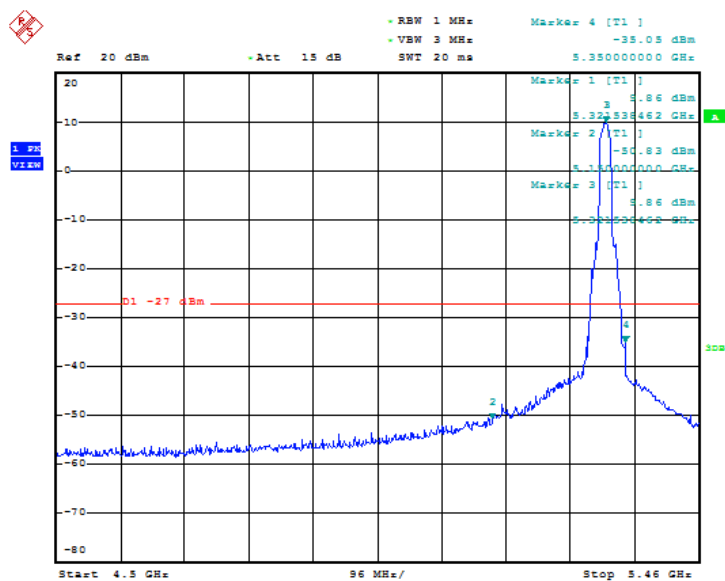


Date: 9.AUG.2019 05:40:24

Fig. 56 Band Edges (802.11a, 5320MHz)

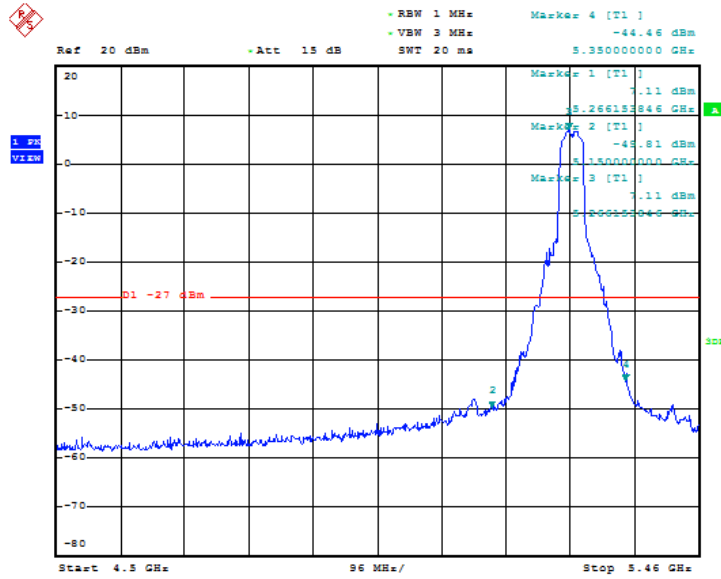

Date: 9.AUG.2019 06:09:32

Fig. 59 Band Edges (802.11n-HT40, 5270MHz)

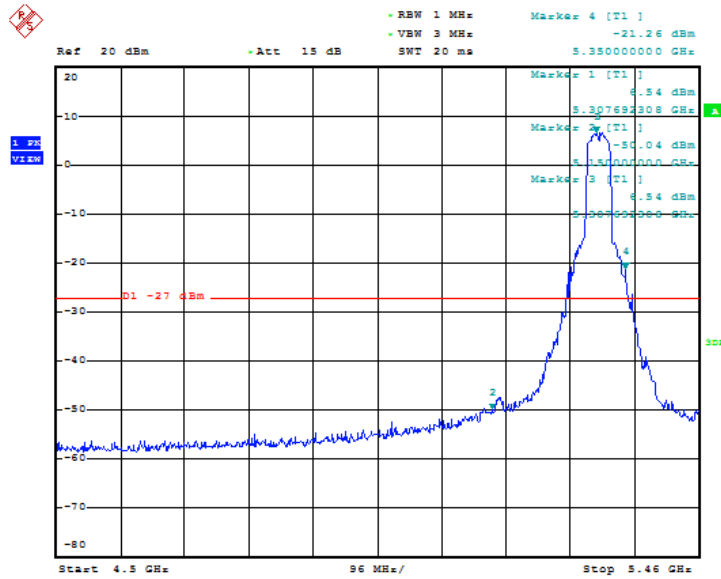

Date: 9.AUG.2019 06:12:14

Fig. 60 Band Edges (802.11n-HT40, 5310MHz)

A.6.2 Band Edges - Radiated

Measurement Limit:

Standard	Limit (dB μ V/m)	
	FCC 47 CFR Part 15.209	Peak
Average		54

The measurement is made according to KDB 789033.

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Measurement Result:

U-NII-1:


Mode	Channel	Test Results	Conclusion
802.11a	5180 MHz	Fig.61	P
	5240 MHz	Fig.62	P
802.11n HT20	5180 MHz	Fig.63	P
	5240 MHz	Fig.64	P
802.11n HT40	5190 MHz	Fig.65	P
	5230 MHz	Fig.66	P

U-NII-2a:


Mode	Channel	Test Results	Conclusion
802.11a	5260 MHz	Fig.67	P
	5320 MHz	Fig.68	P
802.11n HT20	5260 MHz	Fig.69	P
	5320 MHz	Fig.70	P
802.11n HT40	5270 MHz	Fig.71	P
	5310 MHz	Fig.72	P

Conclusion: PASS

Test graphs as below:

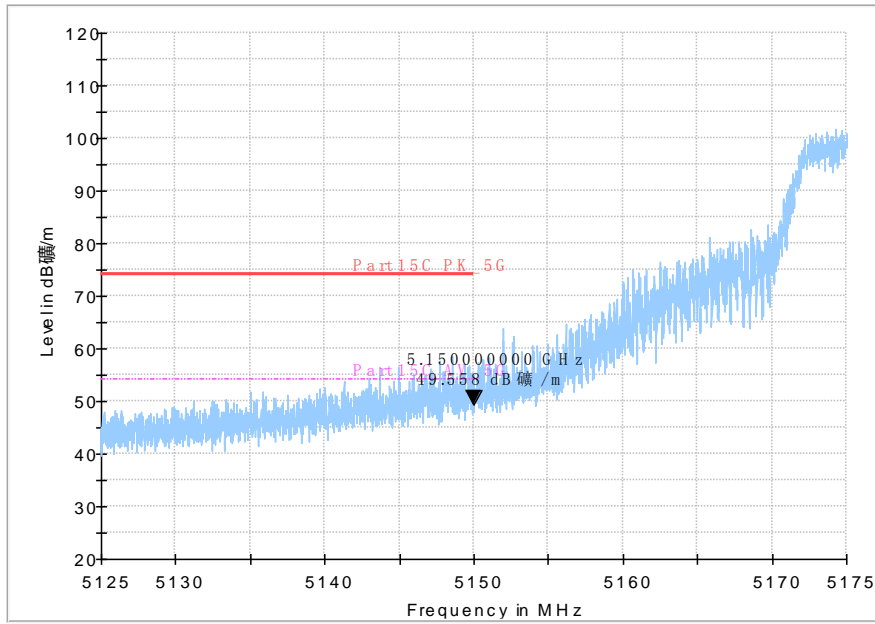


Peak

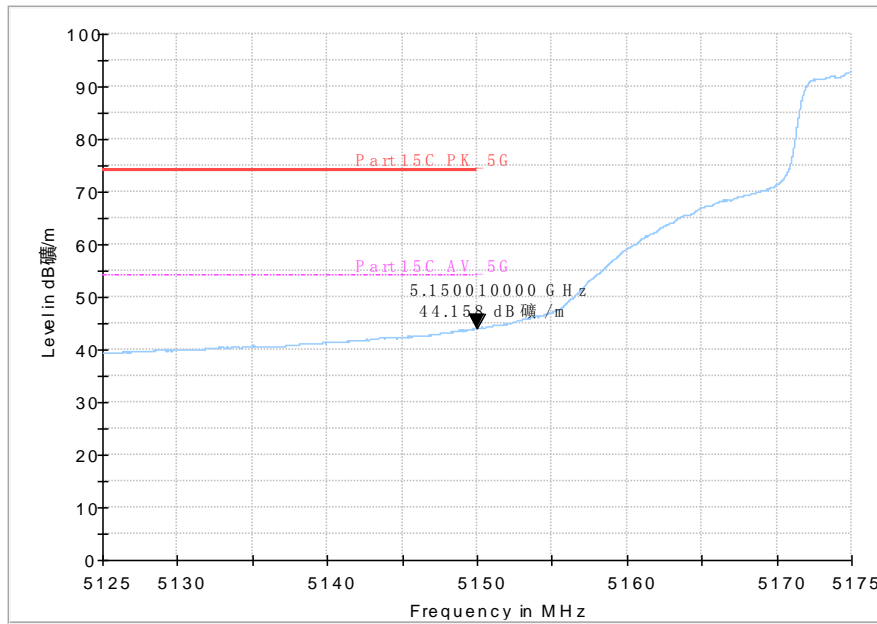


Average

Fig. 61 Band Edges (802.11a, 5180MHz)

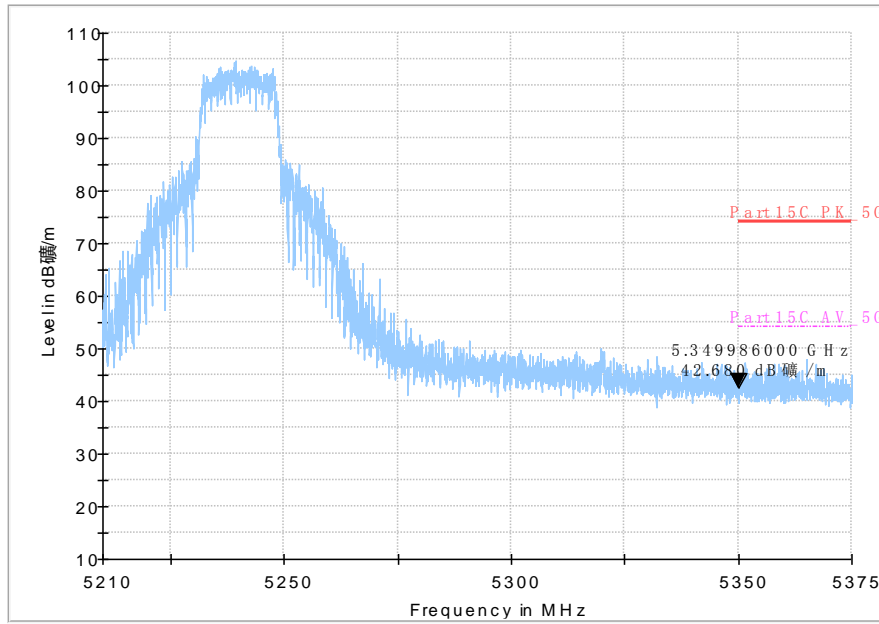


Peak

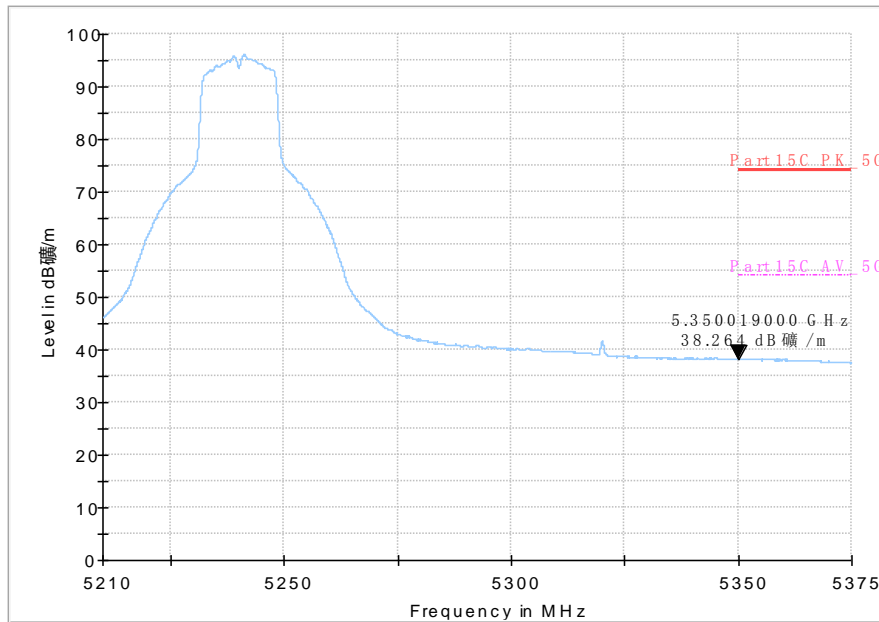


Average

Fig. 62 Band Edges (802.11a, 5240MHz)

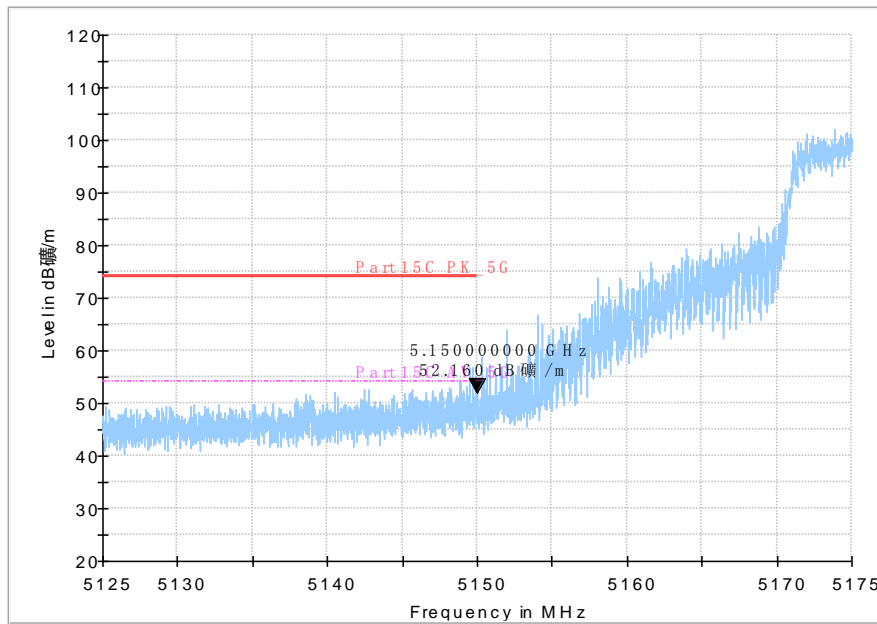


Peak

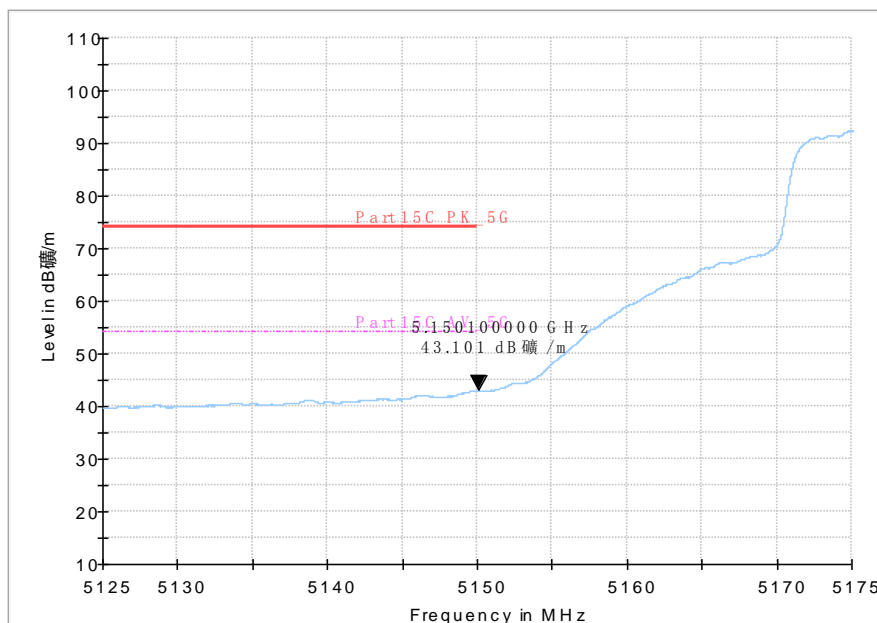


Average

Fig. 63 Band Edges (802.11n-HT20, 5180MHz)

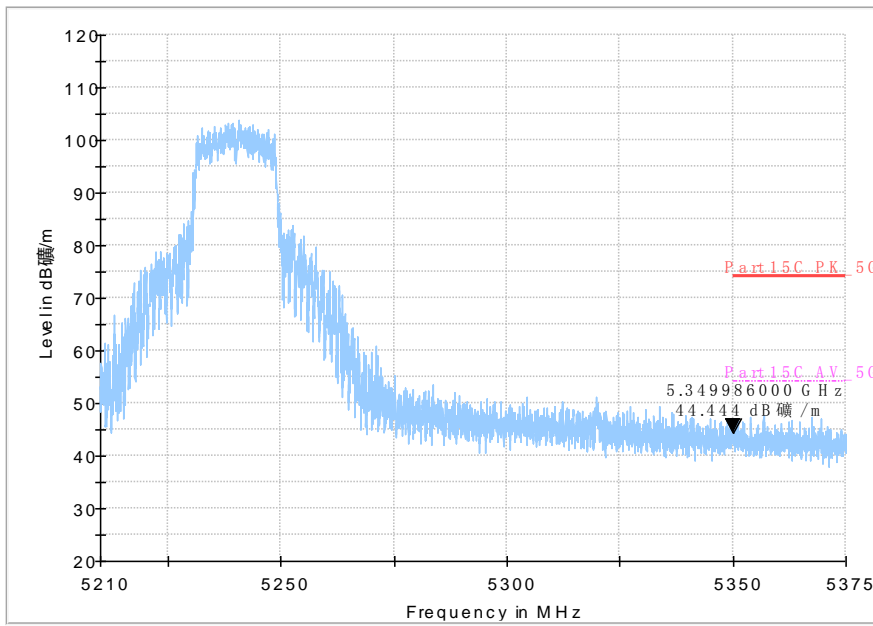


Peak

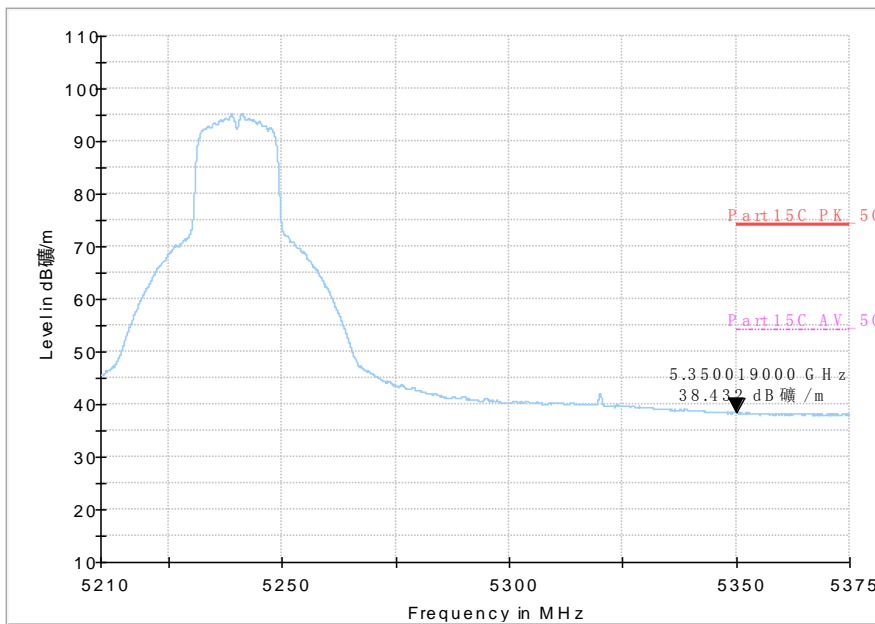


Average

Fig. 64 Band Edges (802.11n-HT20, 5240MHz)

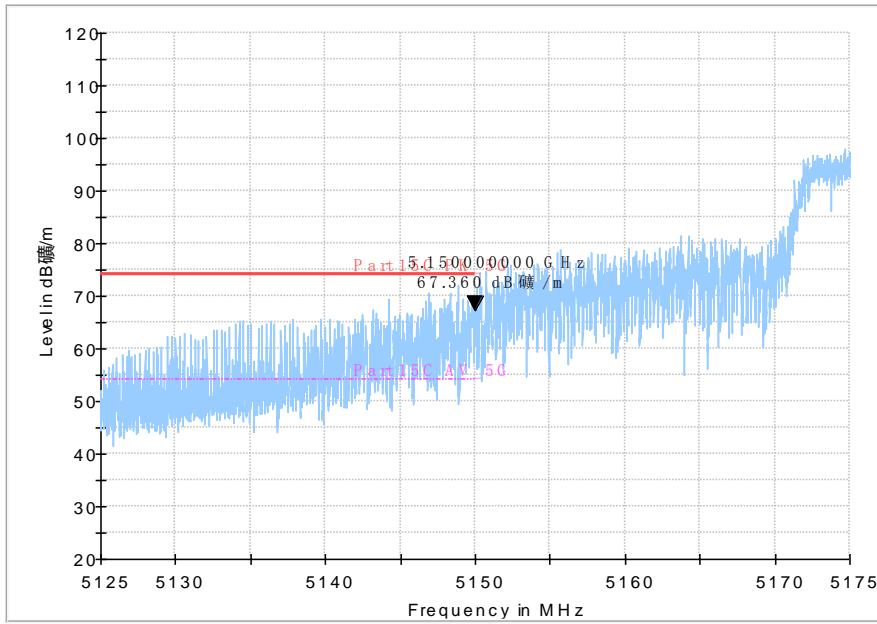


Peak

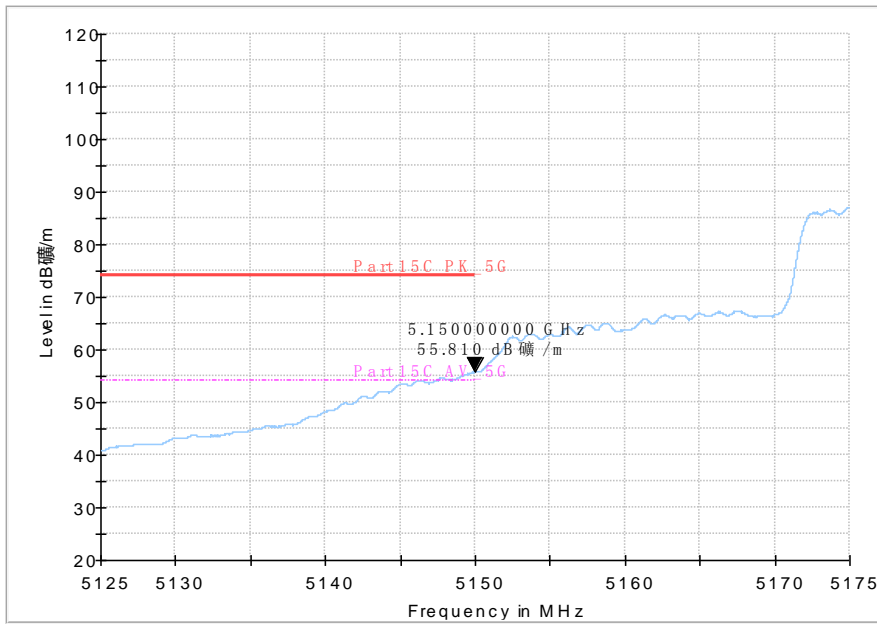


Average

Fig. 65 Band Edges (802.11n-HT40, 5190MHz)

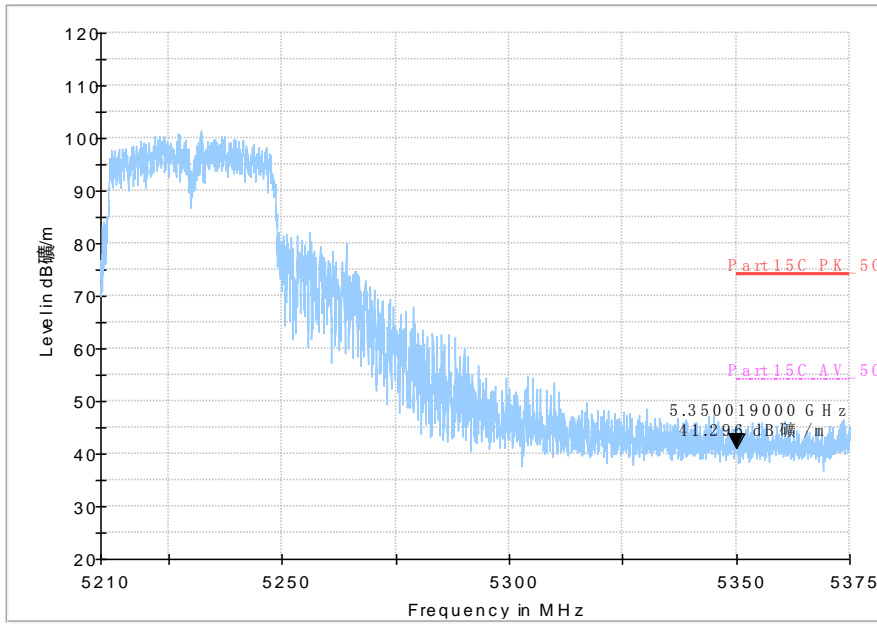


Peak

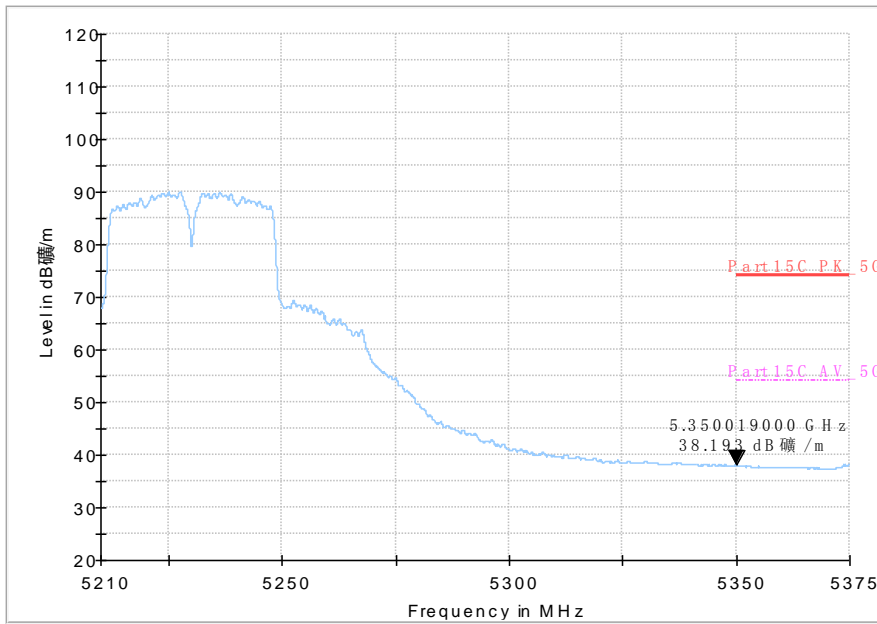


Average

Fig. 66 Band Edges (802.11n-HT40, 5230MHz)

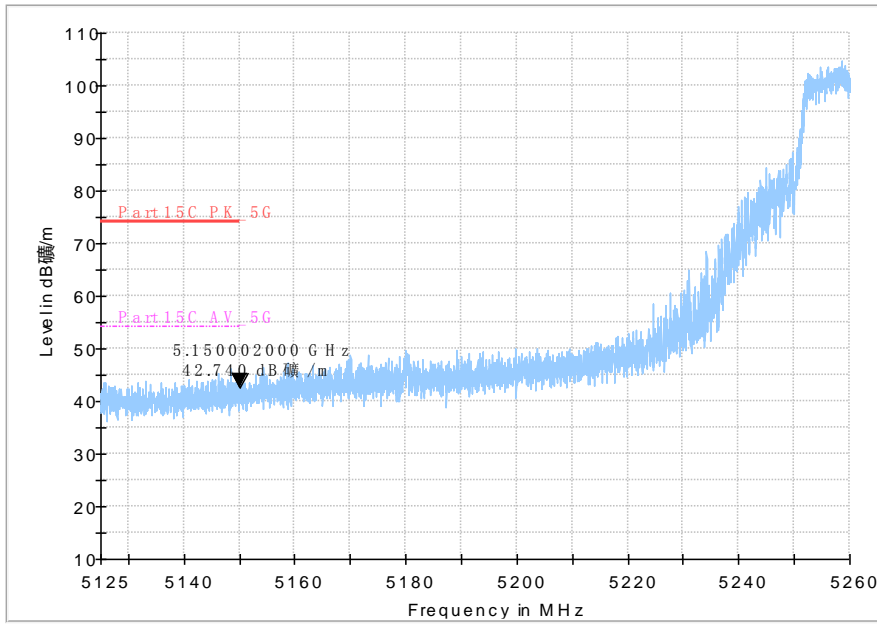


Peak

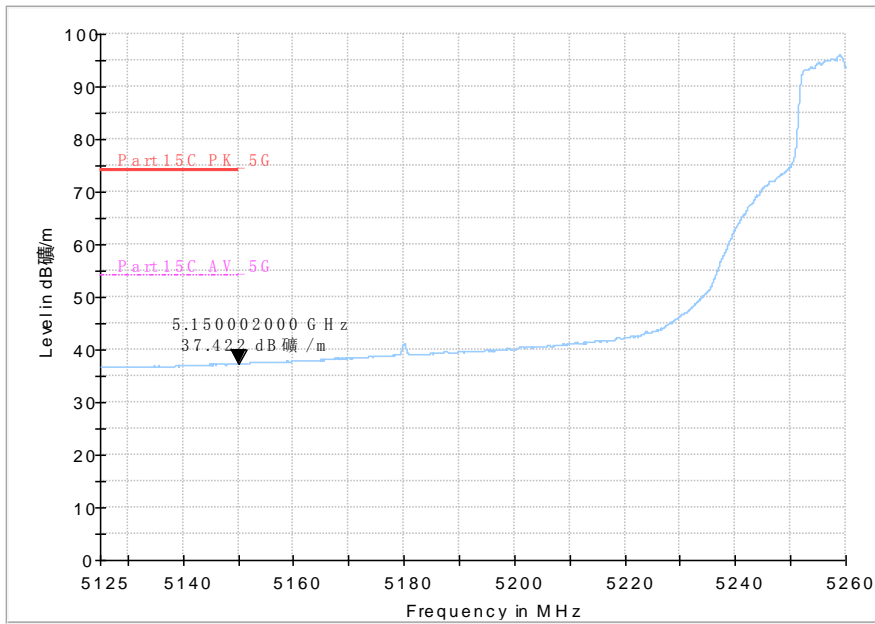


Average

Fig. 67 Band Edges (802.11a, 5260MHz)

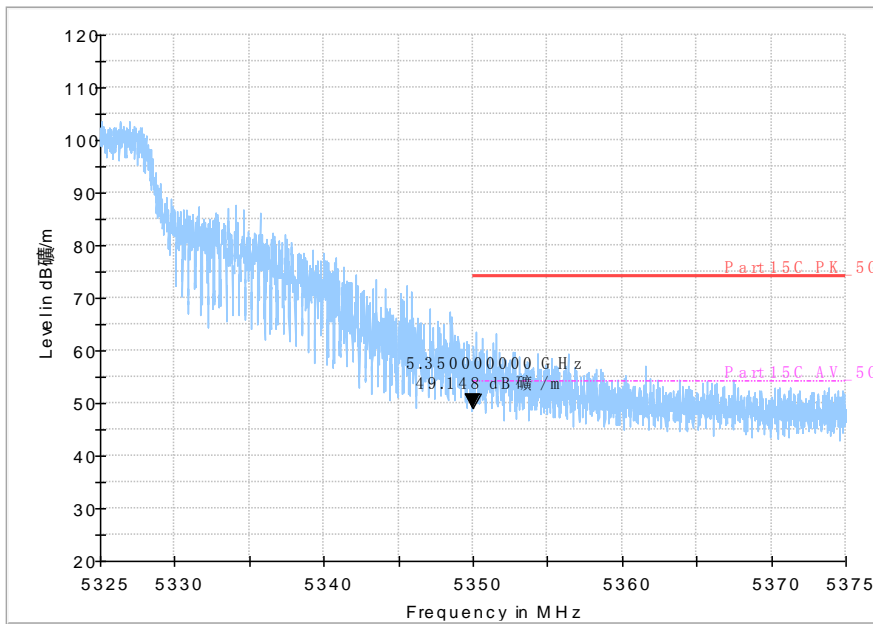


Peak

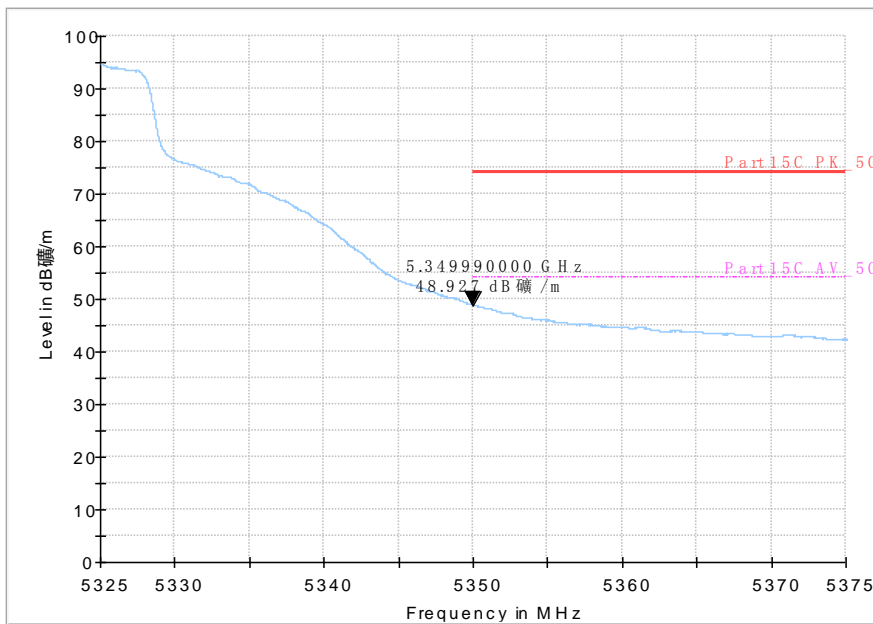


Average

Fig. 68 Band Edges (802.11a, 5320MHz)

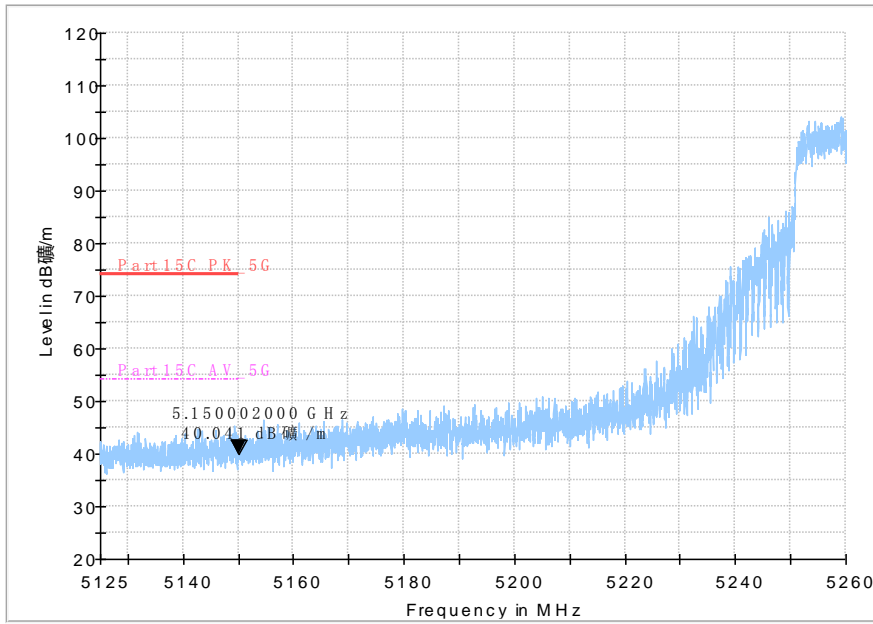


Peak

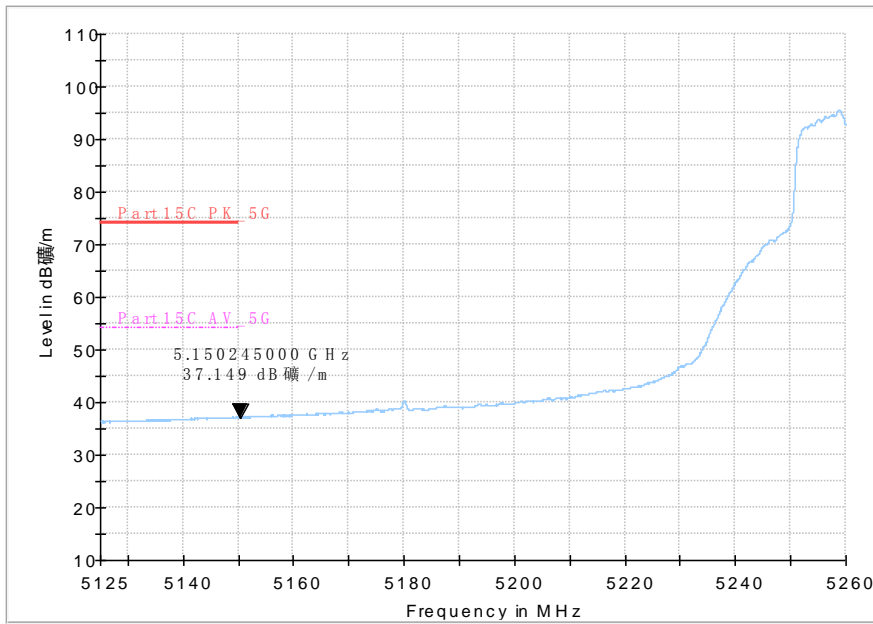


Average

Fig. 69 Band Edges (802.11n-HT20, 5270MHz)

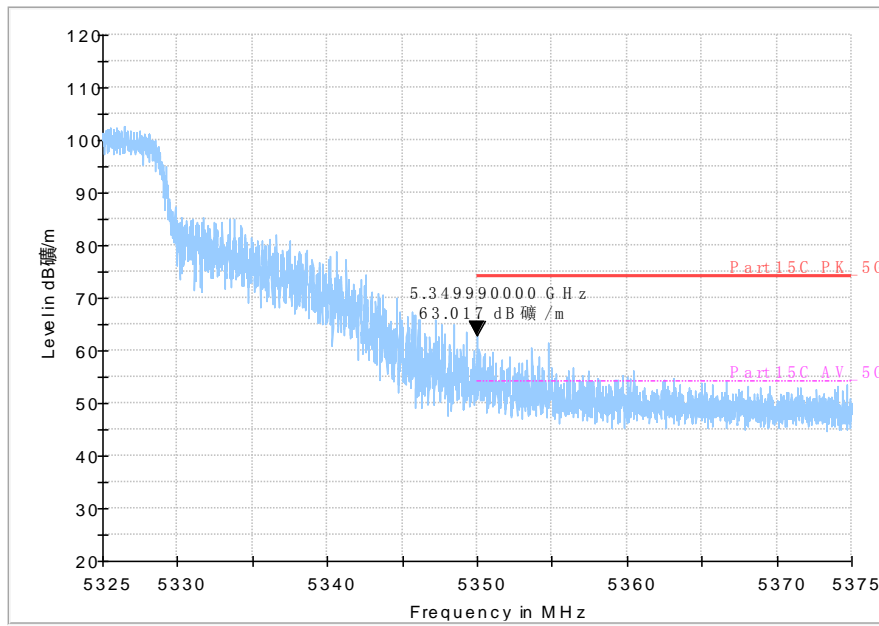


Peak

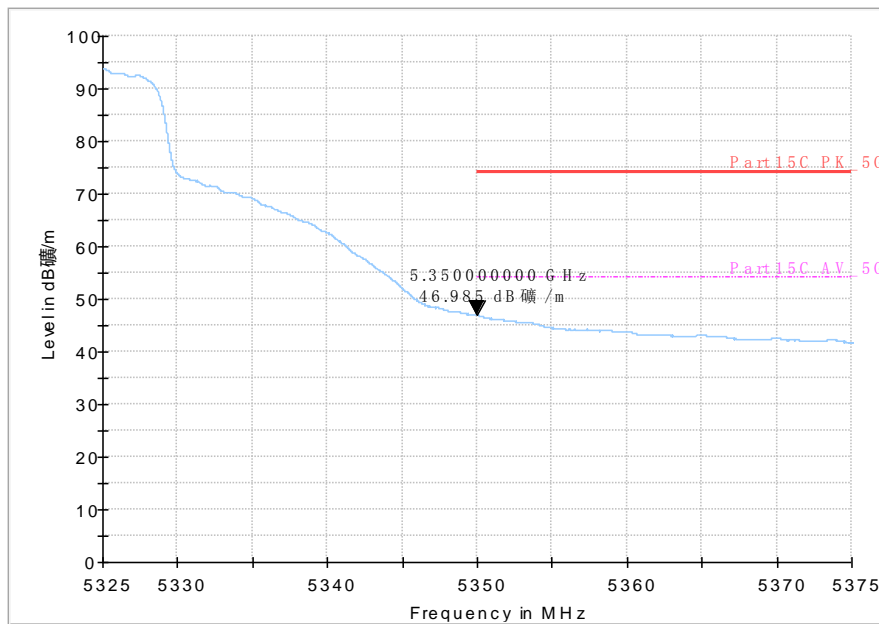


Average

Fig. 70 Band Edges (802.11n-HT20, 5310MHz)

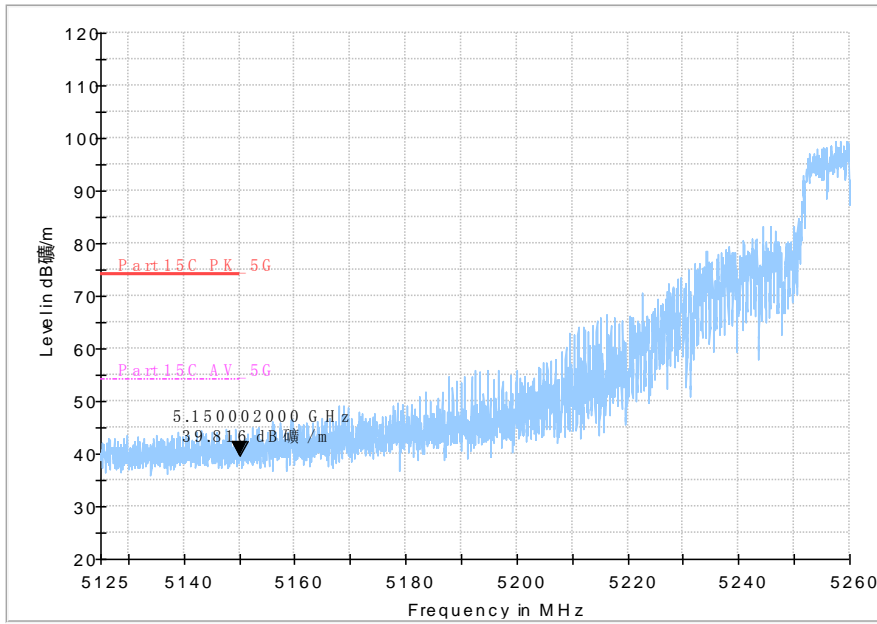


Peak

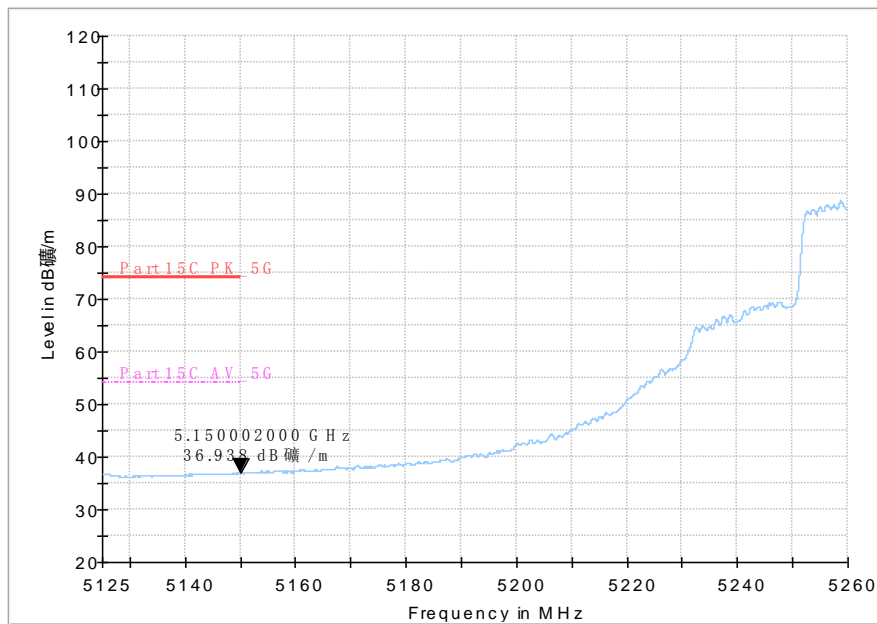


Average

Fig. 71 Band Edges (802.11n-HT40, 5270MHz)

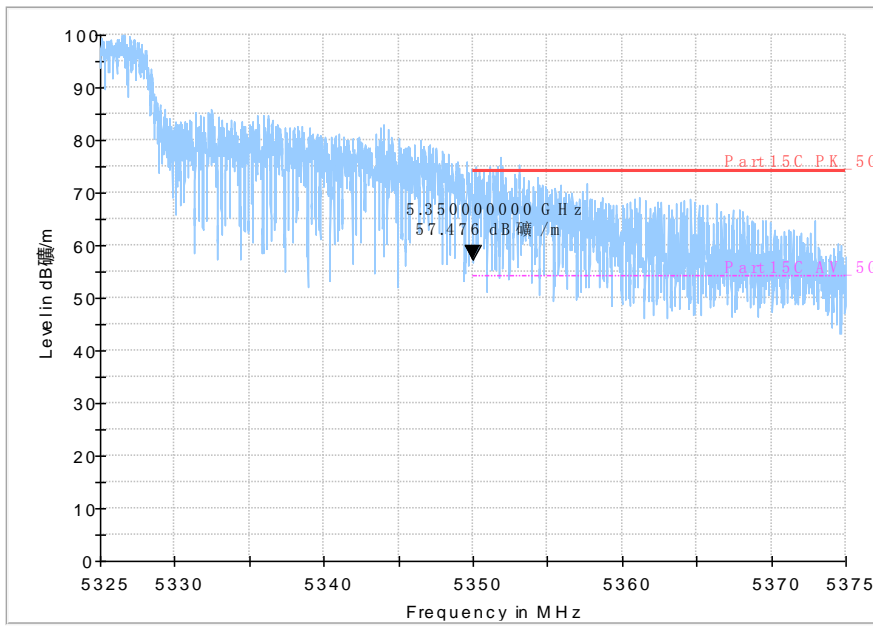

Peak

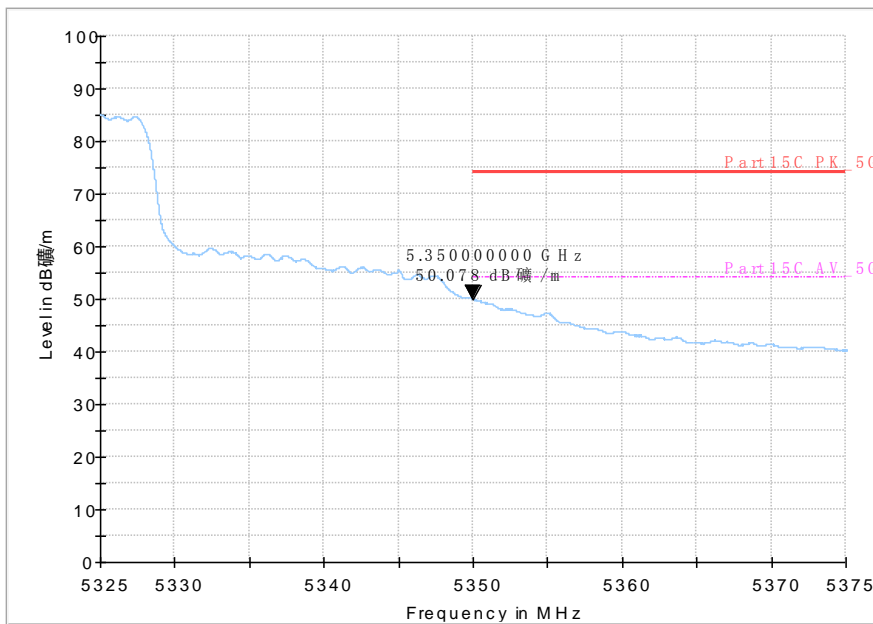

Average

Fig. 72 Band Edges (802.11n-HT40, 5310MHz)

ANNEX A.7. Transmitter Spurious Emission

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407	-27 dBm/MHz

The measurement is made according to KDB 789033

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

Below 1GHz(detector: Peak and Quasi-Peak)

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz(detector: Peak):

(a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=3MHz / Sweep= AUTO

Limit in restricted band:

Frequency of emission (MHz)	Field strength(dBμV/m)	Measurement distance(m)
0.009-0.490	129-94	3
0.490-1.705	74-63	3
1.705-30	70	3
30-88	40.0	3
88-216	43.5	3
216-960	46.0	3
Above 960	54.0	3

Note: for frequency range below 960MHz, the limit in 15.209 is defined in 10m test distance. The limit used above is calculated from 10m to 3m

Modulation type and data rate tested (Only worst case result is given below):

U-NII-1:

Mode	Data rate	Channel
802.11a	6Mbps	48(5240MHz)
802.11n-HT20	MCS0	48(5240MHz)
802.11n-HT40	MCS0	46(5230MHz)

U-NII-2a:

Mode	Data rate	Channel
802.11a	6Mbps	52(5260MHz)
802.11n-HT20	MCS0	60(5300MHz)
802.11n-HT40	MCS0	62(5310MHz)

Measurement Results:
U-NII-1:
802.11a mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11a	48(5240MHz)	30 MHz ~ 1 GHz	Fig.73	P
		1 GHz ~ 8 GHz	Fig.74	P
		8 GHz ~ 18 GHz	Fig.75	P
		18 GHz ~ 26.5 GHz	Fig.76	P
		26.5 GHz ~ 40 GHz	Fig.77	P

802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n- HT20	48(5240MHz)	30 MHz ~ 1 GHz	Fig.78	P
		1 GHz ~ 8 GHz	Fig.79	P
		8 GHz ~ 18 GHz	Fig.80	P
		18 GHz ~ 26.5 GHz	Fig.81	P
		26.5 GHz ~ 40 GHz	Fig.82	P

802.11n-HT40 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n HT40	46(5230MHz)	30 MHz ~ 1 GHz	Fig.83	P
		1 GHz ~ 8 GHz	Fig.84	P
		8 GHz ~ 18 GHz	Fig.85	P
		18 GHz ~ 26.5 GHz	Fig.86	P
		26.5 GHz ~ 40 GHz	Fig.87	P

U-NII-2a:
802.11a mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11a	52(5260MHz)	30 MHz ~ 1 GHz	Fig.88	P
		1 GHz ~ 8 GHz	Fig.89	P
		8 GHz ~ 18 GHz	Fig.90	P
		18 GHz ~ 26.5 GHz	Fig.91	P
		26.5 GHz ~ 40 GHz	Fig.92	P

802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n- HT20	60(5300MHz)	30 MHz ~ 1 GHz	Fig.93	P
		1 GHz ~ 8 GHz	Fig.94	P

		8 GHz ~ 18 GHz	Fig.95	P
		18 GHz ~ 26.5 GHz	Fig.96	P
		26.5 GHz ~ 40 GHz	Fig.97	P

802.11n-HT40 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n HT40	62(5310MHz)	30 MHz ~ 1 GHz	Fig.98	P
		1 GHz ~ 8 GHz	Fig.99	P
		8 GHz ~ 18 GHz	Fig.100	P
		18 GHz ~ 26.5 GHz	Fig.101	P
		26.5 GHz ~ 40 GHz	Fig.102	P

Radiated Spurious Emission (9kHz-30MHz)

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n HT40	38(5190MHz)	9kHz~30 MHz	Fig.103	P

Conclusion: PASS

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result= $P_{Mea}+A_{Rpl}= P_{Mea}+Cable Loss+Antenna Factor$

U-NII-1:
802.11a

Channel 48 (30MHz ~1GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
34.5	14.47	-27.3	41.77	V
52.6	12.98	-25.5	38.48	H
98.3	14.83	-27.6	42.43	V
220.9	15.53	-27.5	43.03	V
450.0	17.8	-22.7	40.5	V
900.0	36.15	-13.9	50.05	V

Channel 48 (1GHz ~ 8GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
5814.2	45.91	4.6	41.31	V
6373.2	46.94	5.6	41.34	H
6713.4	47.73	6.6	41.13	H
7052.6	46.51	7.3	39.21	H
7394.0	46.64	7.2	39.44	V
7746.8	47.51	8.4	39.11	H

Channel 48 (8GHz ~ 18GHz) (Peak)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
10472.0	52.4	13.1	39.3	H
11680.6	51.62	15.1	36.52	H
13138.6	53.51	17.7	35.81	H
14693.8	54.06	19.8	34.26	V
15719.4	61.07	21.9	39.17	H
17145.6	56.65	24.1	32.55	V

Channel 36 (8GHz ~ 18GHz)(Average)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
14693.8	42.17	19.8	22.37	V
15719.4	47.62	21.9	25.72	H
17145.6	44.56	24.1	20.46	V

Channel 48 (18GHz ~ 26.5GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
19237.6	40.13	-5.7	45.83	H
20311.2	42.43	-4.7	47.13	H
21708.6	43.56	-3.4	46.96	V
22996.3	43.57	-3	46.57	H
24211.0	43.97	-2.9	46.87	V
25315.1	45.37	-2.4	47.77	H

Channel 48 (26.5GHz ~ 40GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
28222.6	43.9	-0.5	44.4	H
30301.6	44.54	-0.8	45.34	H
32190.2	44.08	0.5	43.58	V
34008.7	46	1.5	44.5	H
35815.0	46.79	1	45.79	H
38290.9	46.83	2.1	44.73	V

802.11n-HT20

Channel 48 (30MHz ~1GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
34.4	13.05	-27.3	40.35	V
47.2	13.2	-25.2	38.4	V
104.5	9.23	-27.4	36.63	H
220.9	15.31	-27.5	42.81	V

415.0	14.44	-23.1	37.54	H
900.0	35.75	-13.9	49.65	V

Channel 48 (1GHz ~ 8GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
5766.6	45.45	4.7	40.75	V
6224.0	44.76	5.3	39.46	V
6476.6	46.1	6	40.1	H
6974.4	46.52	7.1	39.42	V
7340.8	46.85	7.3	39.55	V
7747.4	47.28	8.4	38.88	V

Channel 48 (8GHz ~ 18GHz) (Peak)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
10486.8	52.88	13.1	39.78	H
11230.8	50.94	13.9	37.04	H
12256.8	51.99	15.8	36.19	H
13327.2	54.15	18.1	36.05	H
14483.6	53.87	19.1	34.77	V
15718.6	64.46	21.9	42.56	H

Channel 48 (8GHz ~ 18GHz)(Average)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
13327.2	41.74	18.1	23.64	H
15718.6	49.42	21.9	27.52	H

Channel 48 (18GHz ~ 26.5GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
19078.6	39.41	-5.5	44.91	H
20504.1	41.13	-4.3	45.43	V
21699.2	43.96	-3.4	47.36	V

22828.8	43.36	-2.9	46.26	V
24182.9	44.85	-2.9	47.75	V
25890.6	47.42	-2	49.42	V

Channel 36 (26.5GHz ~ 40GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
28388.6	42.91	-1.1	44.01	V
30826.8	46.09	0.3	45.79	V
32769.4	42.9	0.6	42.3	V
34608.1	46.47	0.6	45.87	V
36989.5	46.48	1.4	45.08	H
38864.6	50.19	3.7	46.49	H

802.11n-HT40

Channel 46 (30MHz ~ 1GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
34.7	12.65	-27.3	39.95	V
52.3	12.98	-25.5	38.48	H
98.3	14.27	-27.5	41.77	V
220.9	15.02	-27.5	42.52	V
366.2	13.68	-24.2	37.88	V
900.0	35.34	-13.9	49.24	V

Channel 46 (1GHz ~ 8GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
5831.8	45.34	4.6	40.74	V
6092.4	45.32	4.8	40.52	H
6555.8	45.8	6.2	39.6	V
6859.2	45.91	6.8	39.11	V
7167.8	46.1	7.2	38.9	V
7690.2	46.96	8.1	38.86	V

Channel 46 (8GHz ~ 18GHz)(Peak)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
9152.8	49.85	10.4	39.45	V
10459.6	52.72	13	39.72	V
12585.6	53	16.7	36.3	H
14099.8	53.53	19.3	34.23	H
15681.0	59.92	21.7	38.22	V
17009.0	56.95	23.8	33.15	V

Channel 46 (8GHz ~ 18GHz)(Average)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
15681.0	46.64	21.7	24.94	V
17009.0	44.73	23.8	20.93	V

Channel 46 (18GHz ~ 26.5GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
18844.9	40.65	-5.5	46.15	V
19982.2	39.95	-4.9	44.85	V
21199.4	42.1	-3.9	46	H
22452.3	44.77	-3.2	47.97	V
23596.4	45.68	-2.8	48.48	H
24820.4	46.55	-2.3	48.85	H

Channel 46 (26.5GHz ~ 40GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
28273.9	43.72	-0.7	44.42	V
30315.1	44.02	-0.7	44.72	H
32749.2	44.61	0.5	44.11	V
34450.2	47.2	1.2	46	V
35838.0	47.43	1	46.43	H
38269.3	47.11	2	45.11	H

U-NII-2a:
802.11a

Channel 52 (30MHz ~1GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
33.9	12.38	-27.3	39.68	V
78.8	6.08	-31.3	37.38	V
115.7	8.08	-28.3	36.38	H
220.9	15.14	-27.5	42.64	V
473.2	15.42	-22.2	37.62	H
900.0	36.4	-13.9	50.3	V

Channel 52 (1GHz ~ 8GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
5838.8	44.6	4.6	40	V
6164.8	45.41	5.1	40.31	V
6501.0	46.46	6	40.46	H
6871.4	46.37	6.9	39.47	V
7362.6	48.38	7.3	41.08	H
7704.2	46.91	8.2	38.71	V

Channel 52 (8GHz ~ 18GHz)(Peak)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
13618.6	55.2	18.5	36.7	V
15287.2	54.29	20.7	33.59	V
15780.6	68.04	22	46.04	V
16196.2	55.4	22.3	33.1	V
17089.6	57.07	24	33.07	H
17571.8	56.96	24.6	32.36	H

Channel 52 (8GHz ~ 18GHz)(Average)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
10523.4	40.89	13.1	27.79	H
13626.8	41.7	18.5	23.2	H
15115.2	42.44	20.6	21.84	H
15781.0	46.6	22	24.6	V

Channel 52 (18GHz ~ 26.5GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
19014.0	39.44	-5.5	44.94	H
20056.2	40.34	-4.8	45.14	V
20965.6	41	-4.1	45.1	V
22245.8	44.26	-3	47.26	V
23376.2	44.13	-2.6	46.73	H
24632.6	44.19	-2.4	46.59	V

Channel 52 (26.5GHz ~ 40GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
28448.0	45.67	-1.2	46.87	V
30211.2	42.59	-0.9	43.49	V
32006.6	43.84	0.4	43.44	H
33950.6	45.03	1.5	43.53	H
35815.0	46.48	1	45.48	H
38130.2	46.66	1.7	44.96	V

802.11n-HT20

Channel 60 (30MHz ~1GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
34.5	12.48	-27.3	39.78	V
73.7	15.81	-30.3	46.11	V
98.3	15.64	-27.5	43.14	V

220.9	15.28	-27.5	42.78	V
300.0	17.31	-25.7	43.01	V
900.0	35.58	-13.9	49.48	V

Channel 60 (1GHz ~ 8GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
5833.6	44.85	4.6	40.25	V
6174.0	45.68	5.1	40.58	V
6590.8	46.7	6.3	40.4	H
6960.2	47.45	7.1	40.35	H
7302.4	46.06	7.4	38.66	H
7770.0	47.58	8.5	39.08	V

Channel 60 (8GHz ~ 18GHz)(Peak)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
8478.8	46.92	8.6	38.32	V
9210.6	49.26	10.4	38.86	H
10598.8	54.32	13	41.32	V
11631.0	51.79	15.2	36.59	H
13598.8	54.58	18.4	36.18	V
15904.6	58.76	21.9	36.86	H

Channel 60 (8GHz ~ 18GHz)(Average)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
10598.8	41.08	13	28.08	V
13598.8	41.79	18.4	23.39	V
15904.6	46.02	21.9	24.12	H

Channel 60 (18GHz ~ 26.5GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
19069.3	39.2	-5.5	44.7	H

20263.6	40.92	-4.8	45.72	V
21353.2	42.63	-3.5	46.13	V
22695.4	44.16	-2.8	46.96	V
23518.2	45.77	-2.8	48.57	V
24736.2	44.5	-2.2	46.7	V

Channel 60 (26.5GHz ~ 40GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
27843.2	44.64	-0.4	45.04	V
30662.0	45.05	-0.1	45.15	V
32653.3	42.76	0.3	42.46	V
34408.3	45.03	1.4	43.63	V
36773.5	46.24	2.3	43.94	V
38794.4	48.75	3.4	45.35	V

802.11n-HT40

Channel 62 (30MHz ~1GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
34.4	12.86	-27.3	40.16	V
56.9	11.93	-26.4	38.33	V
96.4	9.23	-27.9	37.13	V
220.9	15.4	-27.5	42.9	V
300.0	18.41	-25.7	44.11	V
900.0	35.45	-13.9	49.35	V

Channel 62 (1GHz ~ 8GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
6131.6	44.57	4.9	39.67	H
6432.8	46.42	5.8	40.62	V
6721.8	47.17	6.7	40.47	H
7146.0	47	7.3	39.7	H
7401.8	46.19	7.2	38.99	V
7763.4	47.49	8.5	38.99	H

Channel 62 (8GHz ~ 18GHz)(Peak)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
8495.0	48.07	8.6	39.47	V
10608.8	53.08	13	40.08	V
11647.0	52.76	15.2	37.56	H
13145.6	53.01	17.7	35.31	H
14994.4	54.64	20.2	34.44	V
15943.4	62.79	22.1	40.69	H

Channel 62 (8GHz ~ 18GHz)(Average)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
14994.4	42.25	20.2	22.05	V
15943.4	47.68	22.1	25.58	H

Channel 62 (18GHz ~ 26.5GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
19031.0	40.78	-5.5	46.28	V
20332.4	41.05	-4.7	45.75	H
21759.6	43.3	-3.4	46.7	V
22939.4	43.9	-3	46.9	H
24129.4	43.7	-2.8	46.5	H
25366.1	44.51	-2.6	47.11	H

Channel 62 (26.5GHz ~ 40GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
27856.8	44.98	-0.4	45.38	H
30122.0	43.85	-1.1	44.95	H
32068.8	43.66	0.4	43.26	V
33930.4	45.68	1.5	44.18	H
35577.4	46.99	1.4	45.59	V
37422.8	44.25	0.9	43.35	V

Test graphs as below:

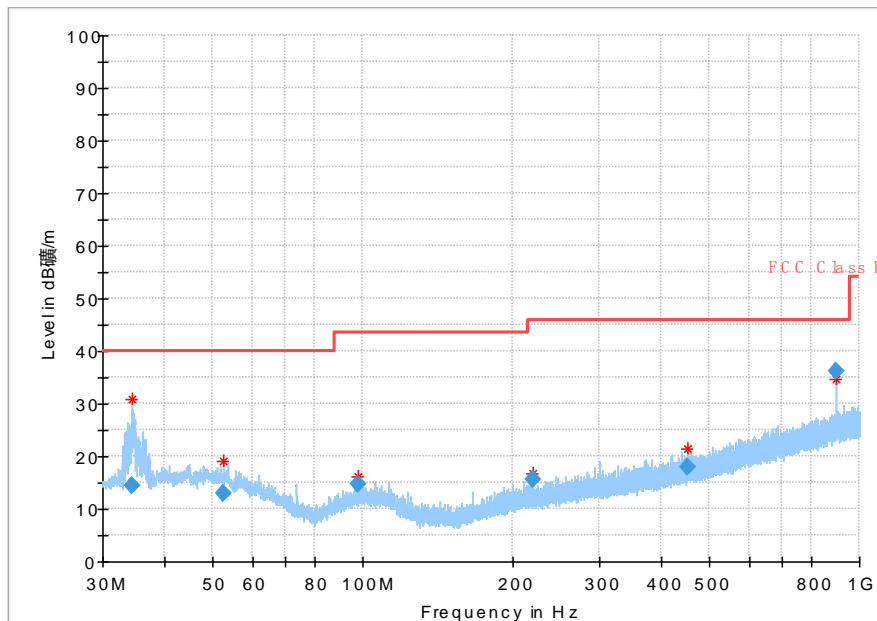


Fig. 73 Radiated Spurious Emission (802.11a, ch48, 30 MHz-1 GHz)

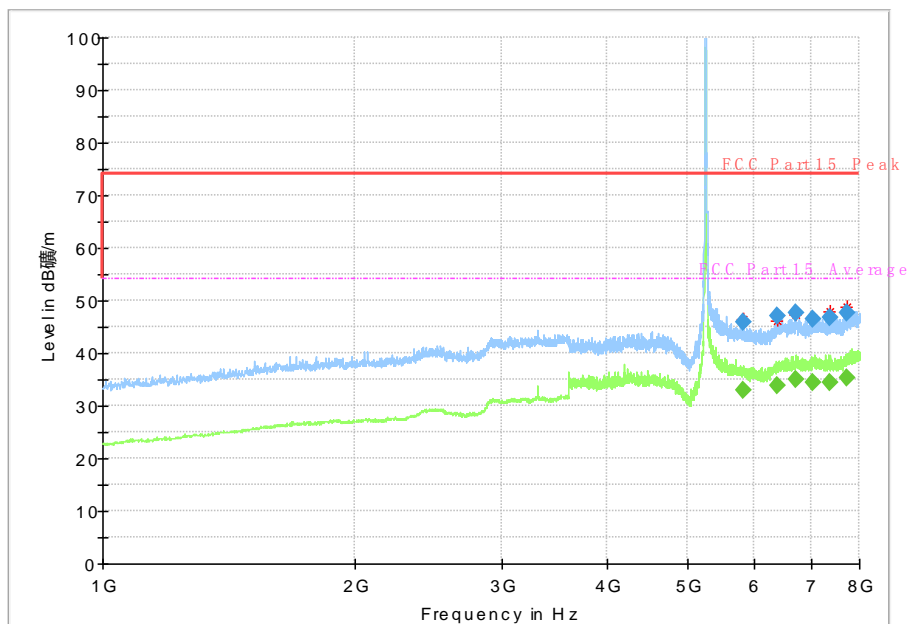


Fig. 74 Radiated Spurious Emission (802.11a, ch48, 1 GHz-8 GHz)

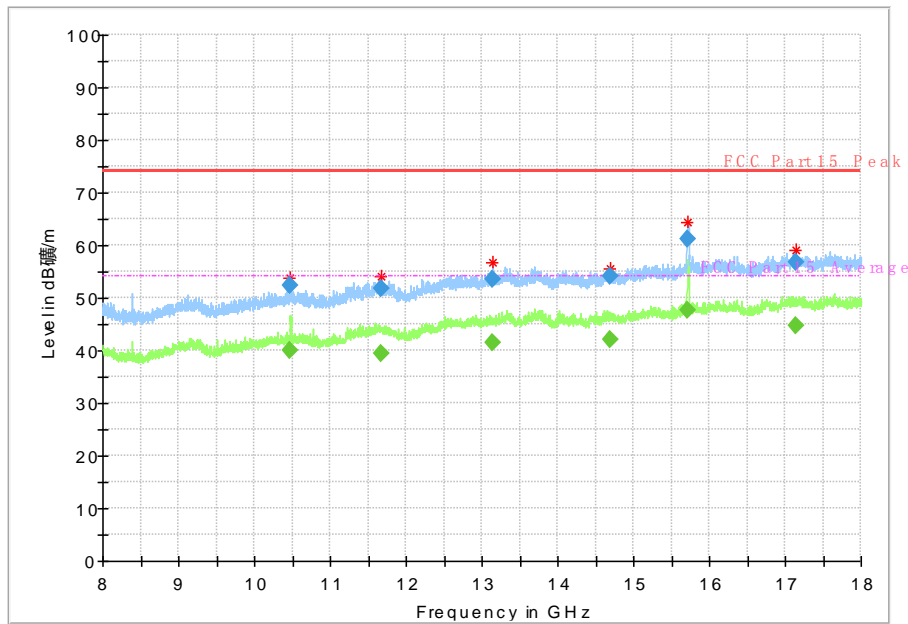


Fig. 75 Radiated Spurious Emission (802.11a, ch48, 8 GHz-18 GHz)

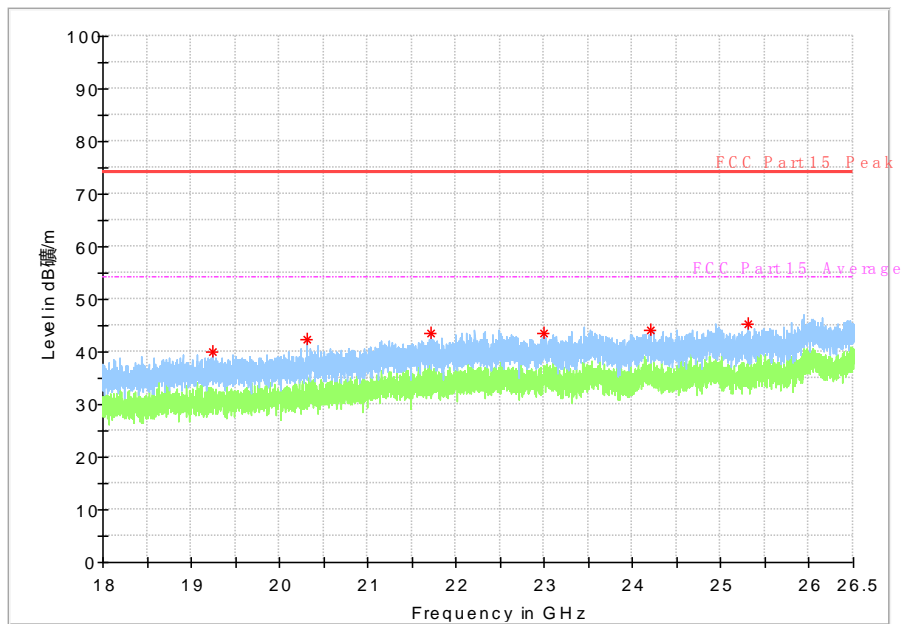


Fig. 76 Radiated Spurious Emission (802.11a, ch48, 18 GHz-26.5 GHz)

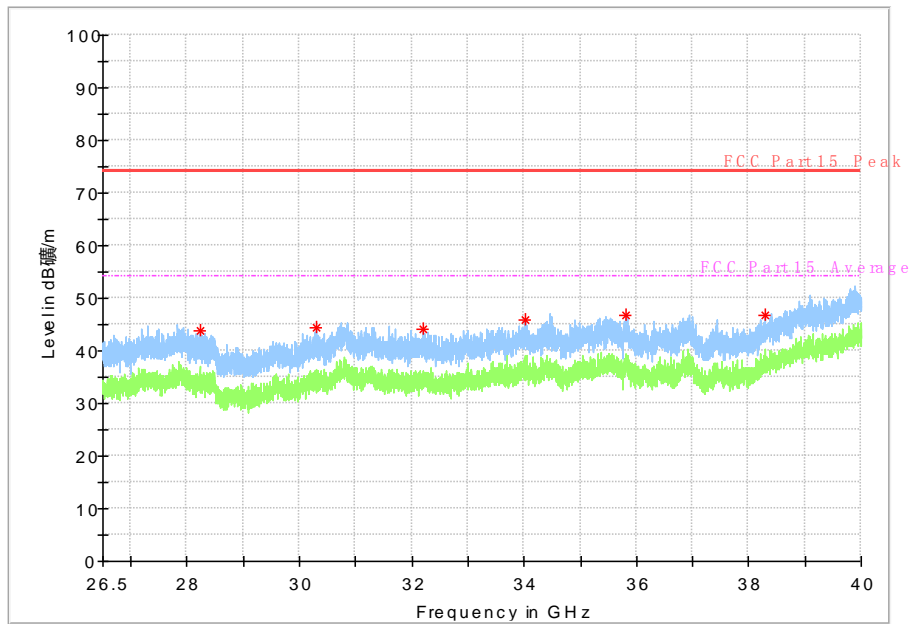


Fig. 77 Radiated Spurious Emission (802.11a, ch48, 26.5 GHz-40 GHz)

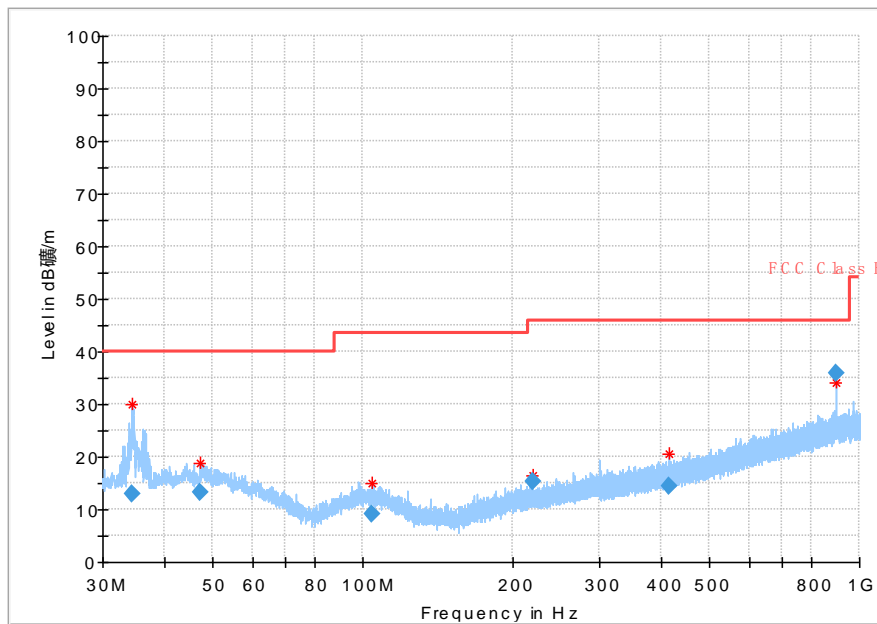


Fig. 78 Radiated Spurious Emission (802.11n-HT20, ch48, 30 MHz-1 GHz)

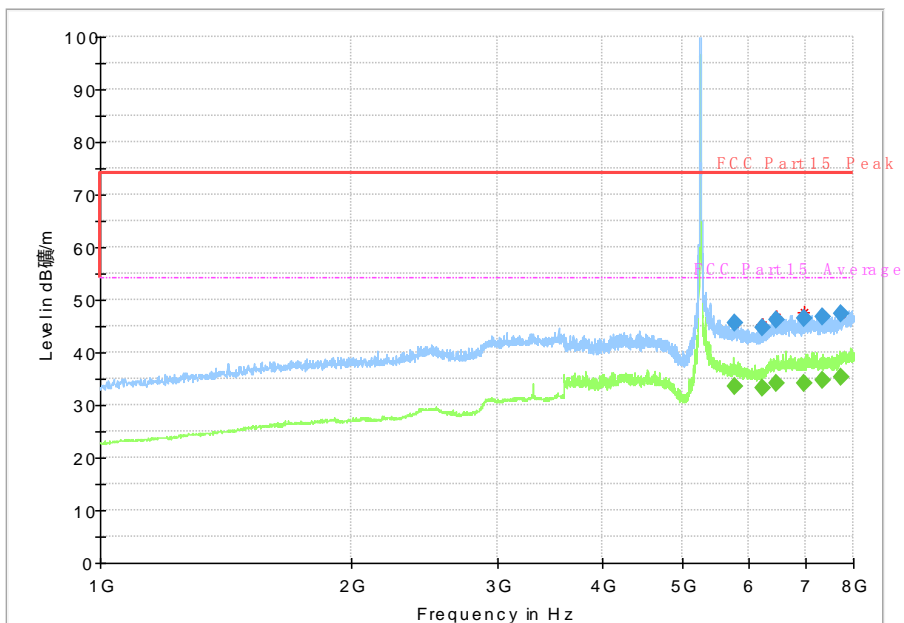


Fig. 79 Radiated Spurious Emission (802.11n-HT20, ch48, 1 GHz-8 GHz)

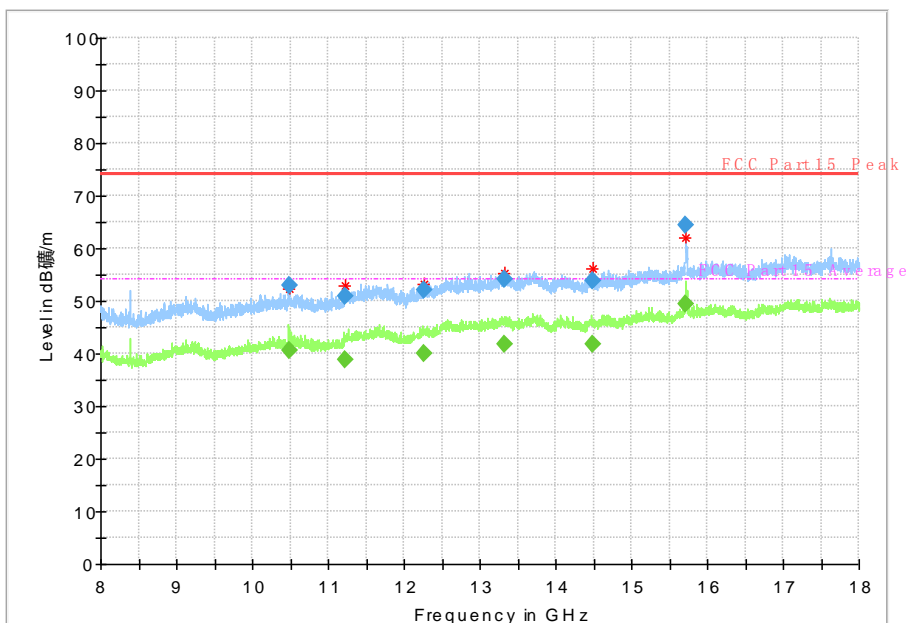


Fig. 80 Radiated Spurious Emission (802.11n-HT20, ch48, 8 GHz-18 GHz)

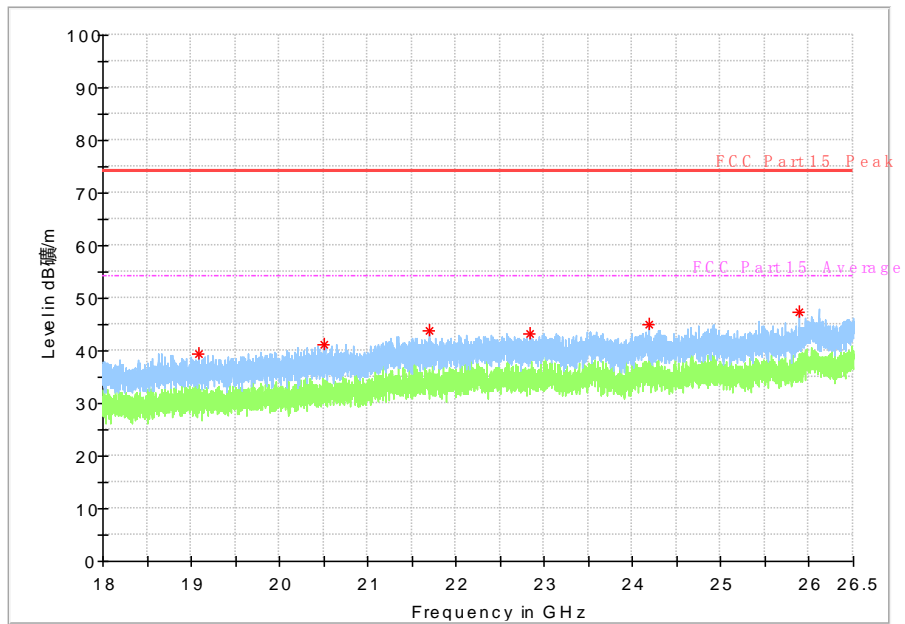


Fig. 81 Radiated Spurious Emission (802.11n-HT20, ch48, 18 GHz-26.5 GHz)

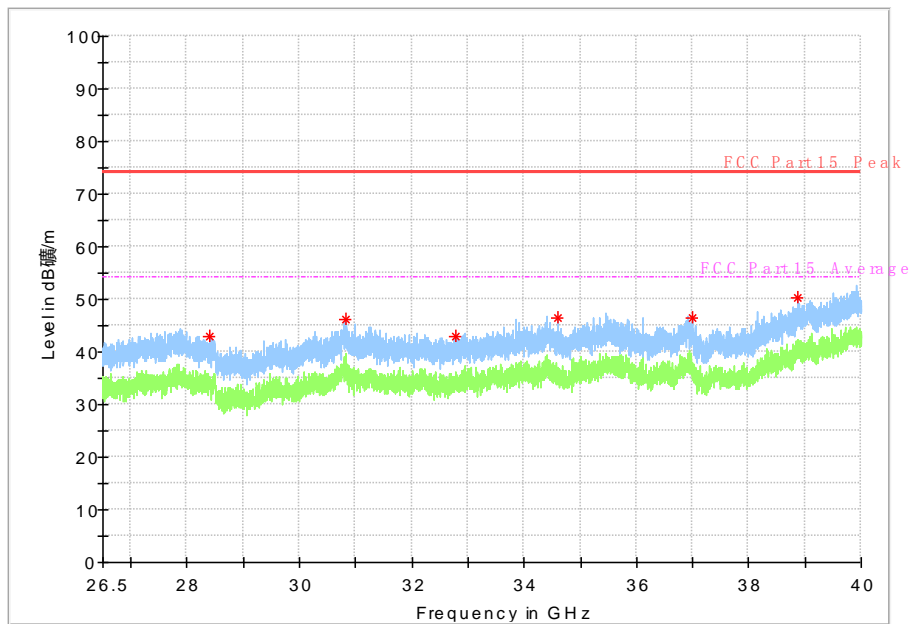


Fig. 82 Radiated Spurious Emission (802.11n-HT20, ch48, 26.5 GHz-40 GHz)

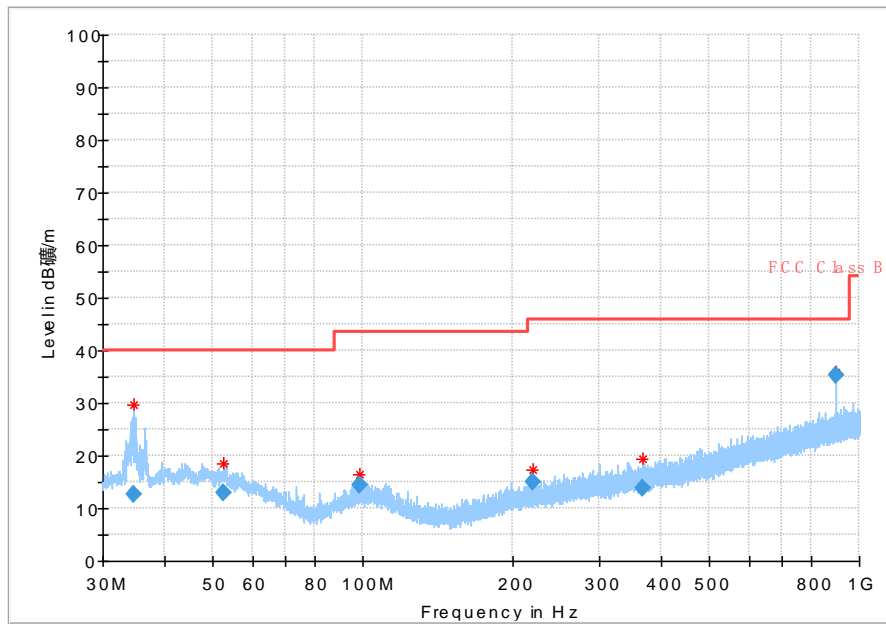


Fig. 83 Radiated Spurious Emission (802.11n-HT40, ch46, 30 MHz-1 GHz)

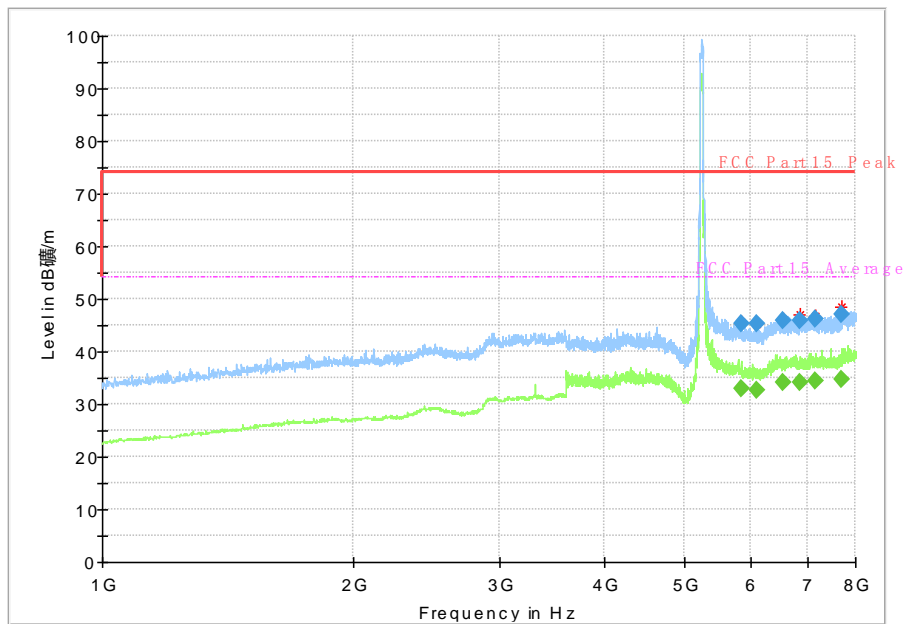


Fig. 84 Radiated Spurious Emission (802.11n-HT40, ch46, 1 GHz-8 GHz)

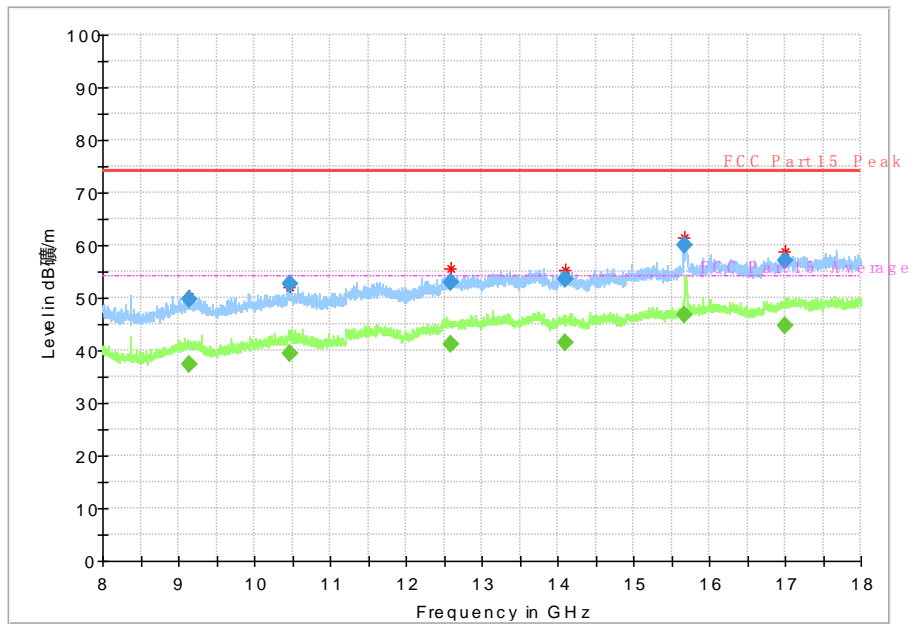


Fig. 85 Radiated Spurious Emission (802.11n-HT40, ch46, 8 GHz-18 GHz)

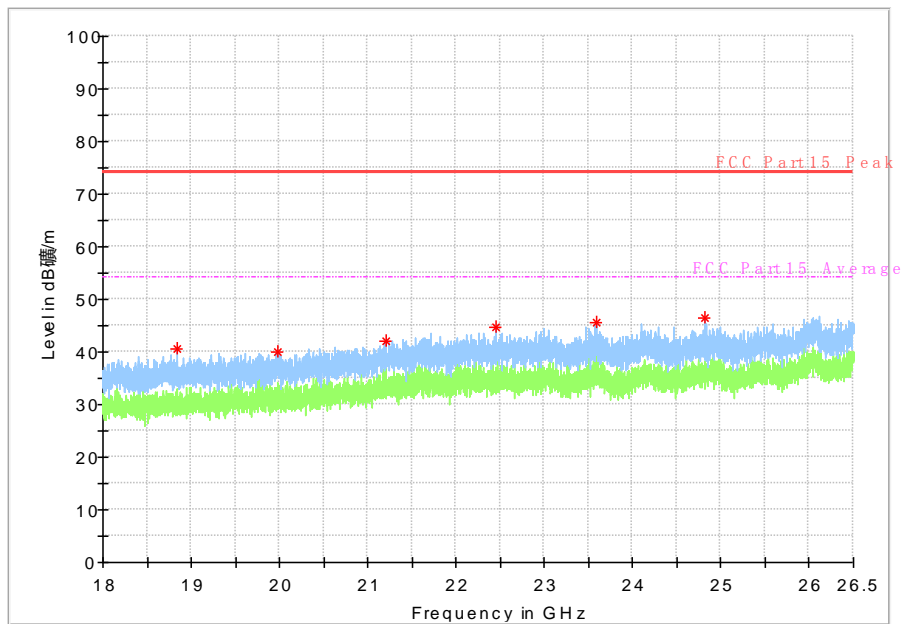


Fig. 86 Radiated Spurious Emission (802.11n-HT40, ch46, 18 GHz-26.5 GHz)

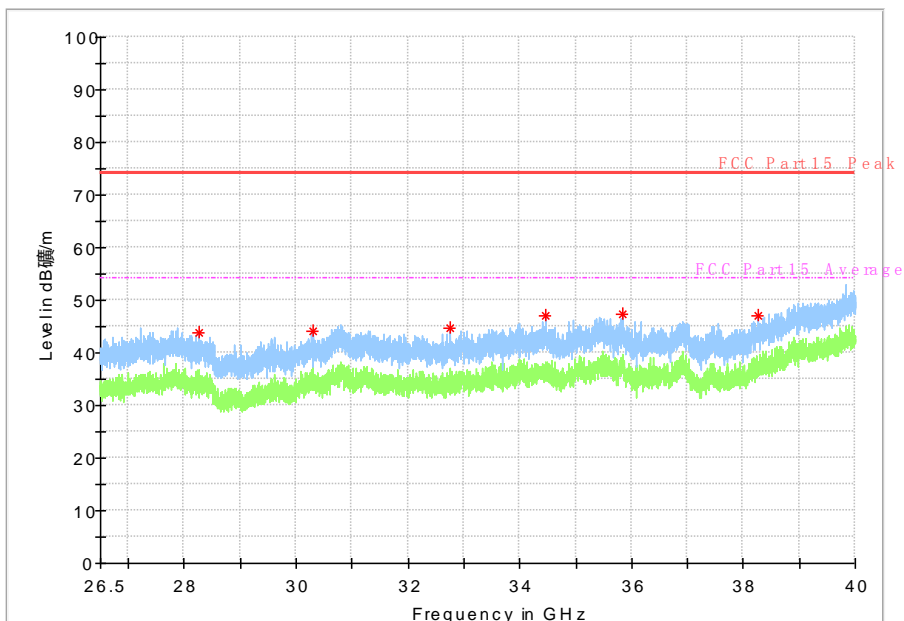


Fig. 87 Radiated Spurious Emission (802.11n-HT40, ch46, 26.5 GHz-40 GHz)

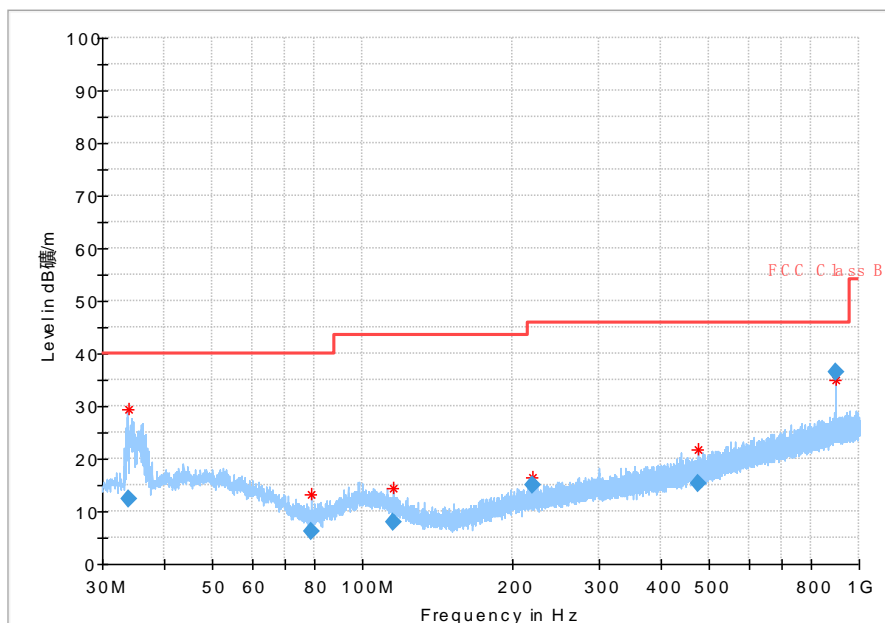


Fig. 88 Radiated Spurious Emission (802.11a, ch52, 30 MHz-1 GHz)

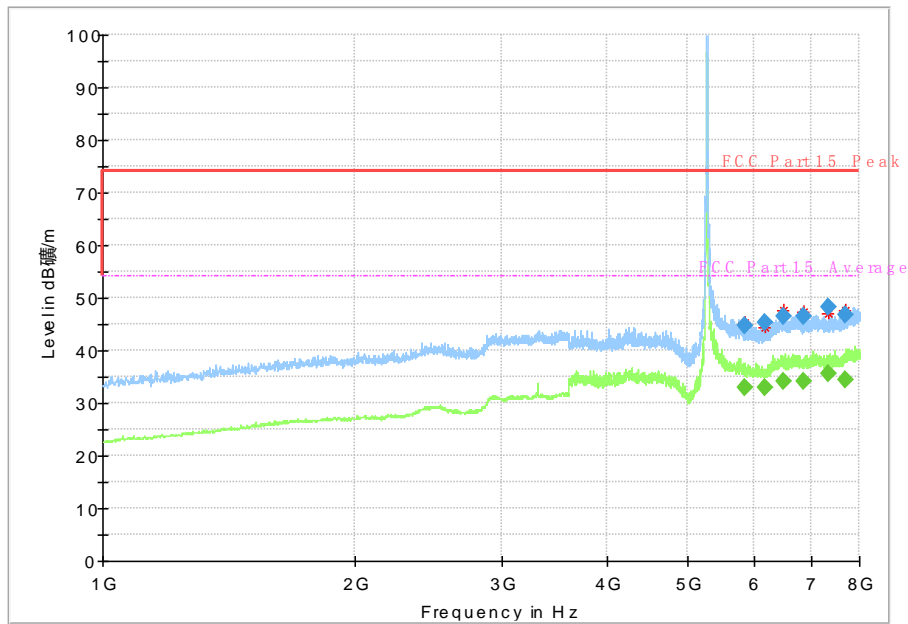


Fig. 89 Radiated Spurious Emission (802.11a, ch52, 1 GHz-8 GHz)

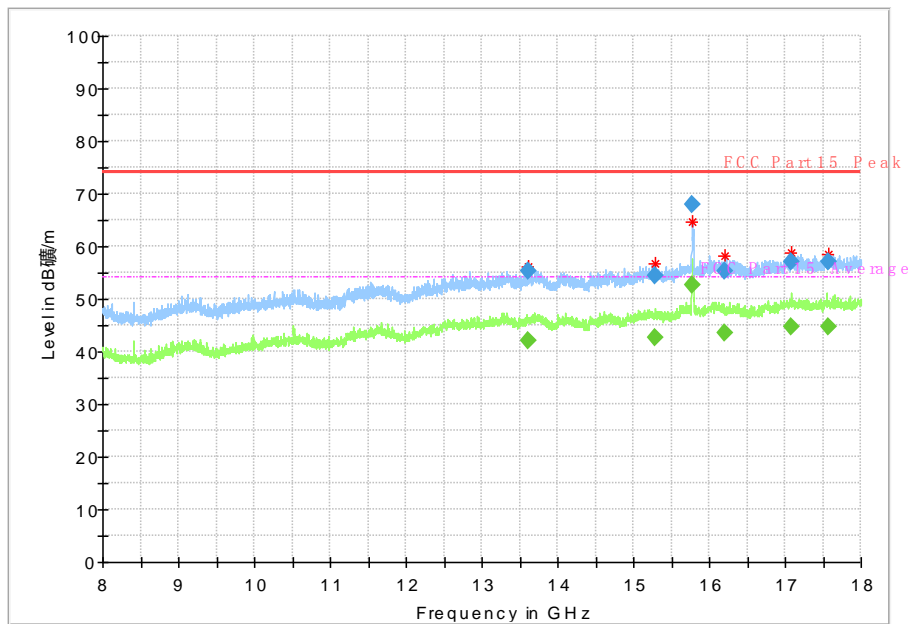


Fig. 90 Radiated Spurious Emission (802.11a, ch52, 8 GHz-18 GHz)

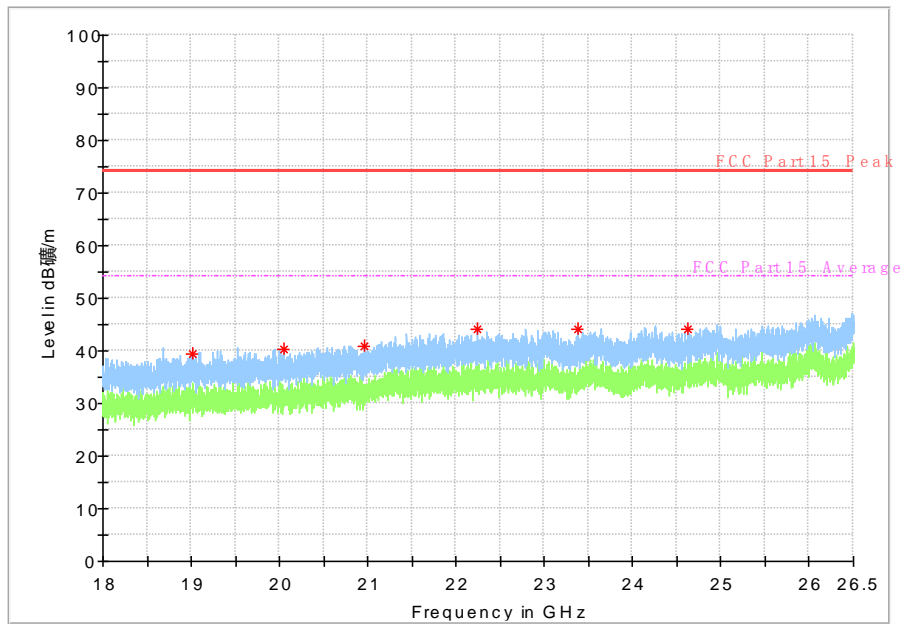


Fig. 91 Radiated Spurious Emission (802.11a, ch52, 18 GHz-26.5 GHz)

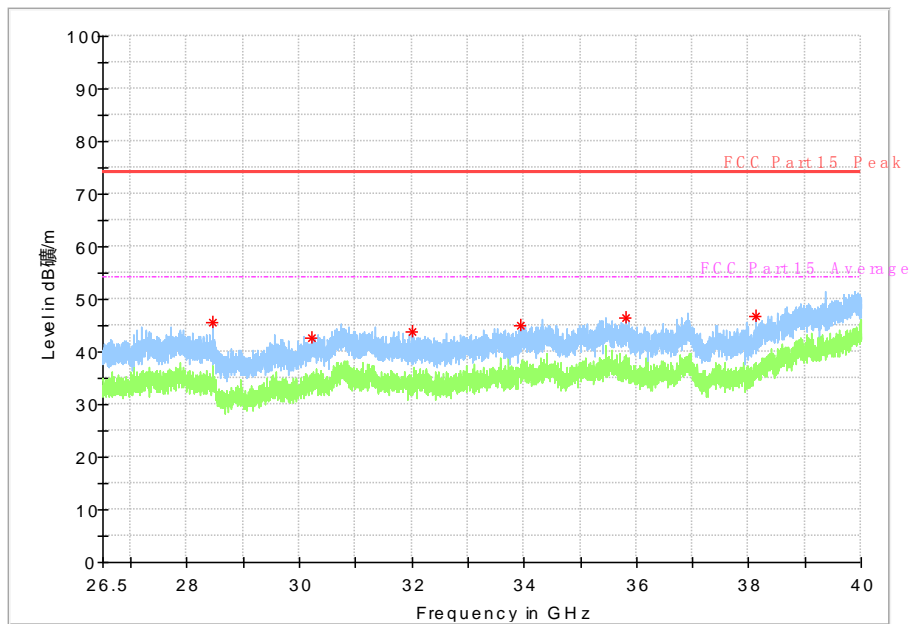


Fig. 92 Radiated Spurious Emission (802.11a, ch52, 26.5 GHz-40 GHz)

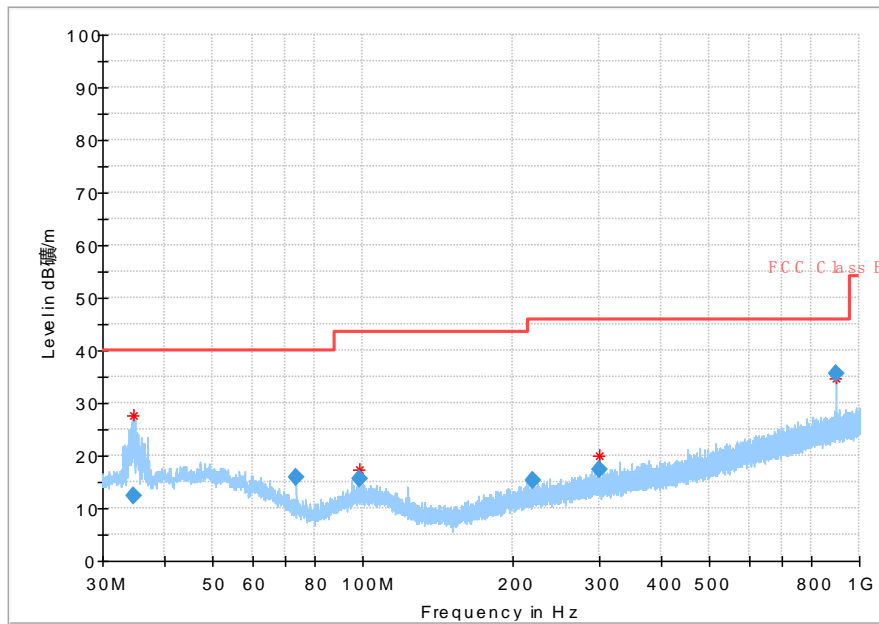


Fig. 93 Radiated Spurious Emission (802.11n-HT20, ch60, 30 MHz-1 GHz)

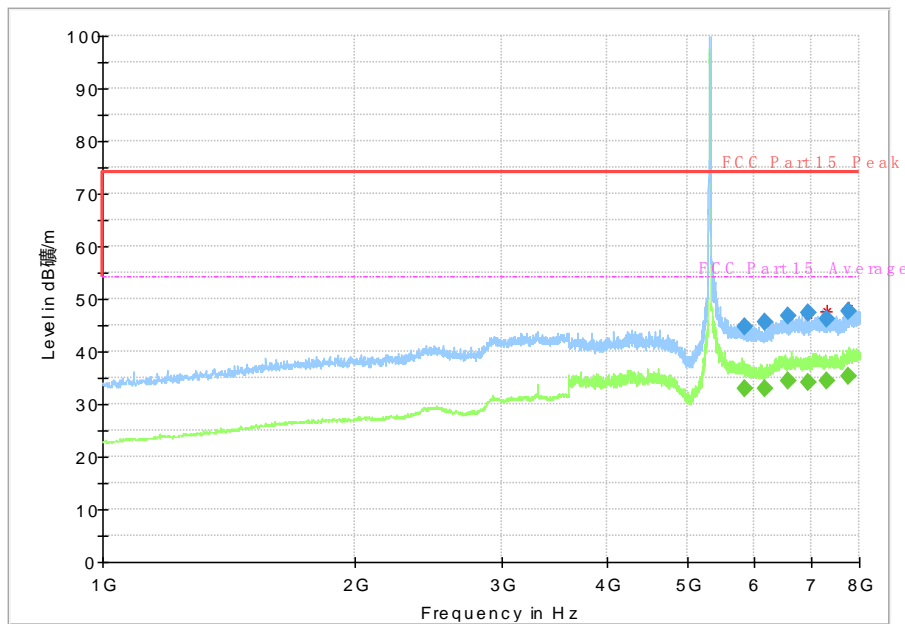


Fig. 94 Radiated Spurious Emission (802.11n-HT20, ch60, 1 GHz-8 GHz)

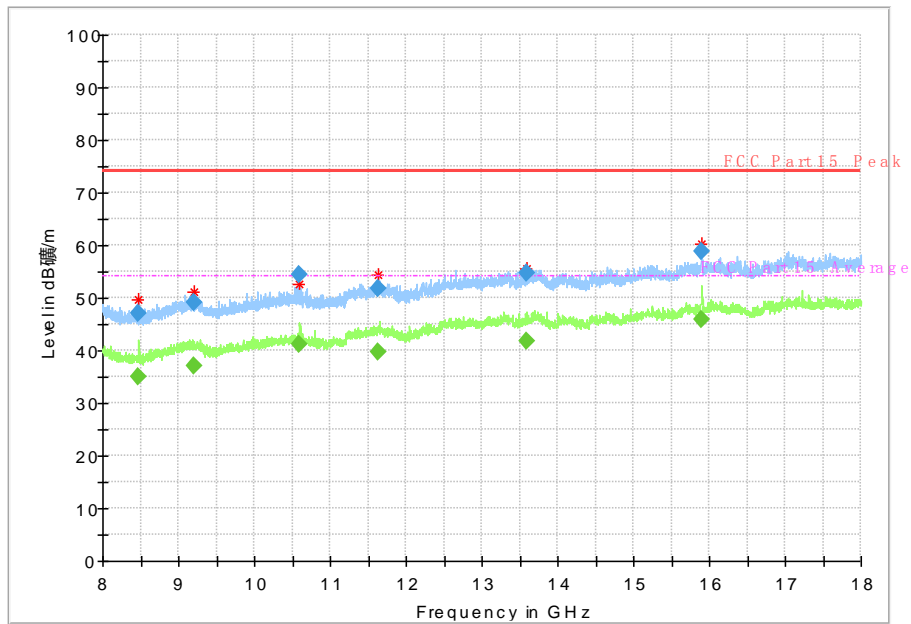


Fig. 95 Radiated Spurious Emission (802.11n-HT20, ch60, 8 GHz-18 GHz)

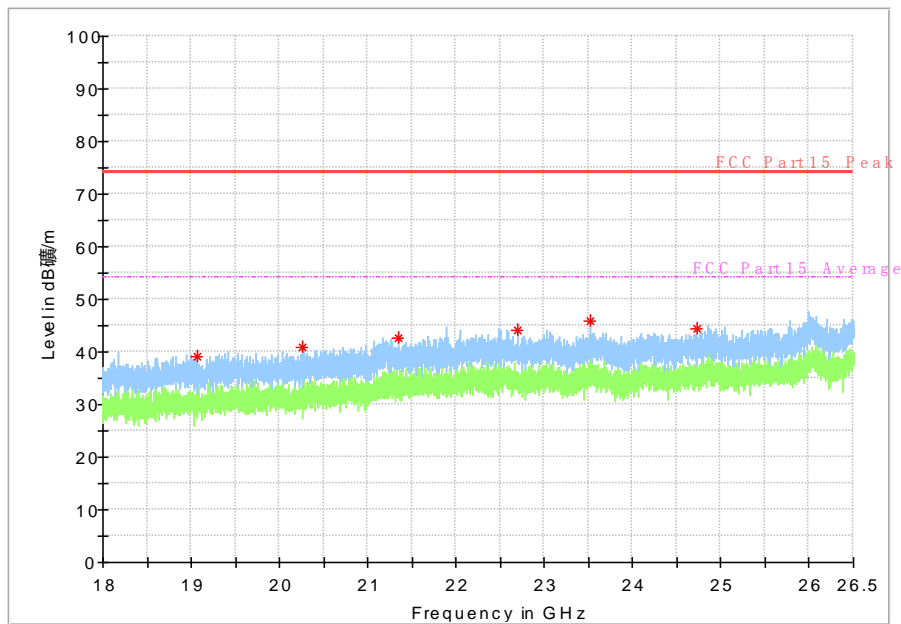


Fig. 96 Radiated Spurious Emission (802.11n-HT20, ch60, 18 GHz-26.5 GHz)

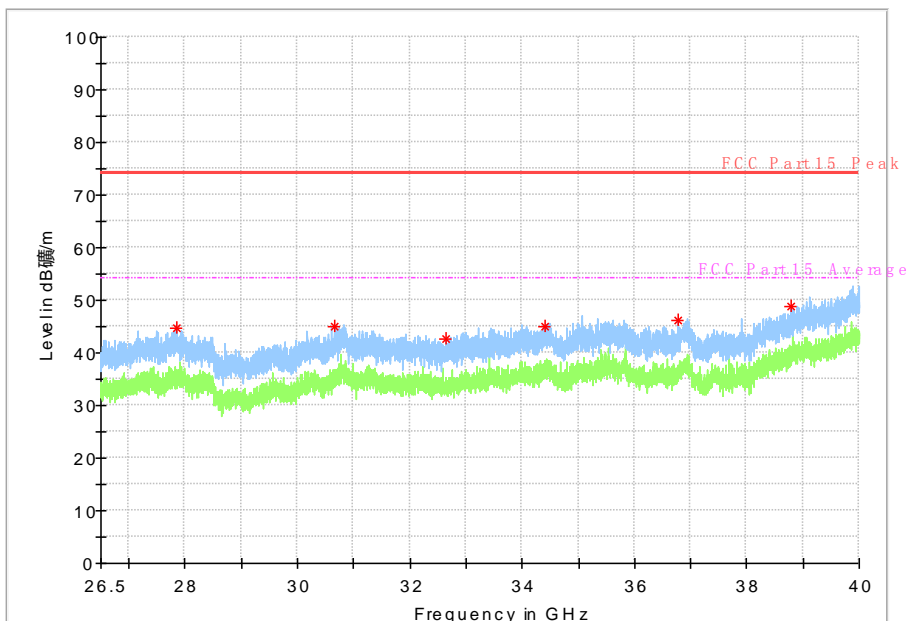


Fig. 97 Radiated Spurious Emission (802.11n-HT20, ch60, 26.5 GHz-40 GHz)

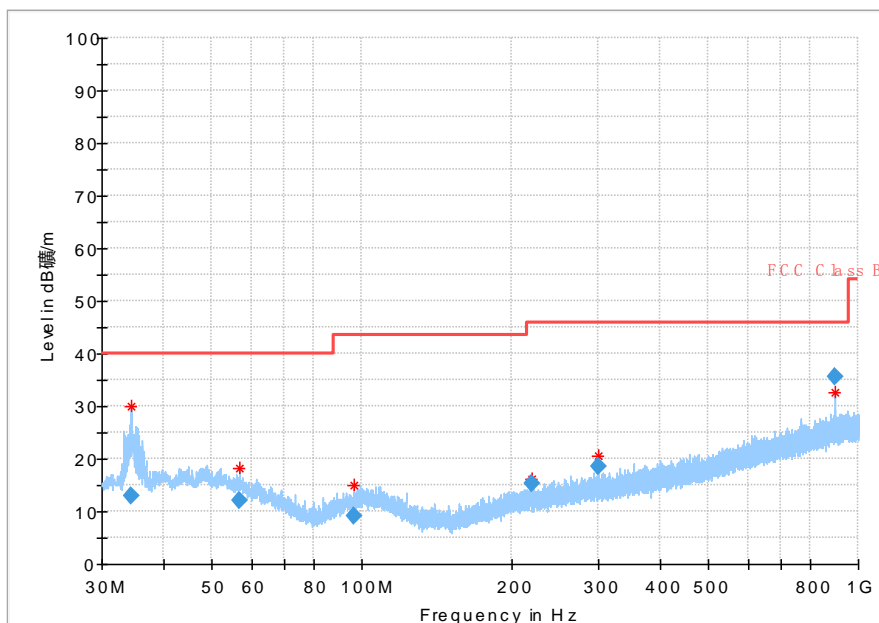


Fig. 98 Radiated Spurious Emission (802.11n-HT40, ch62, 30 MHz-1 GHz)

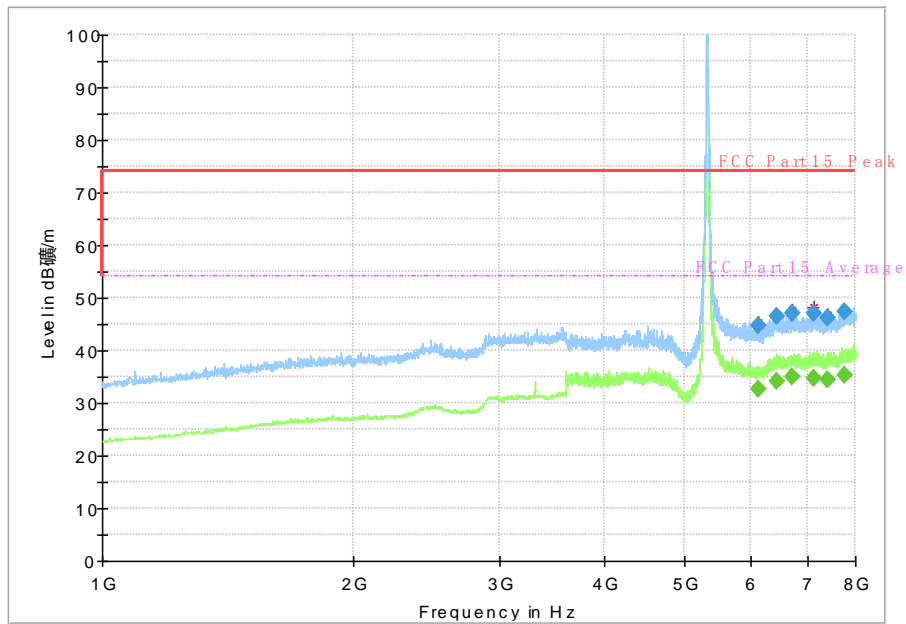


Fig. 99 Radiated Spurious Emission (802.11n-HT40, ch62, 1 GHz-8 GHz)

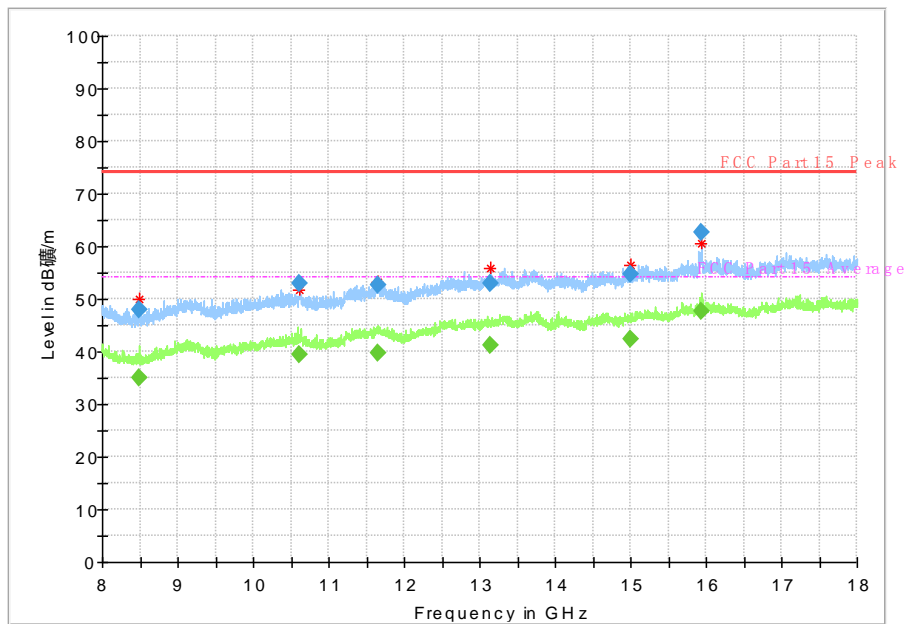


Fig. 100 Radiated Spurious Emission (802.11n-HT40, ch62, 8 GHz-18 GHz)

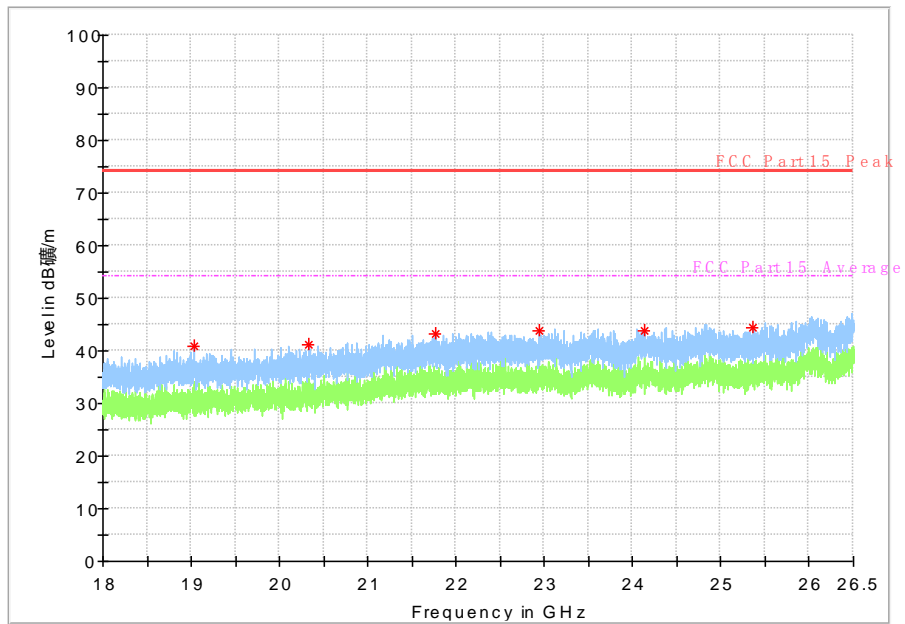


Fig. 101 Radiated Spurious Emission (802.11n-HT40, ch62, 18 GHz-26.5 GHz)

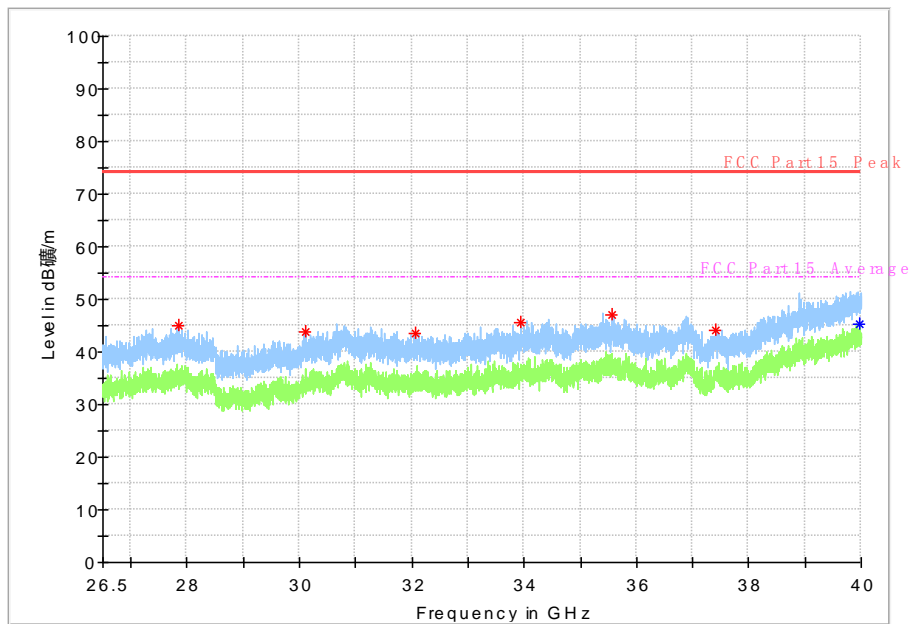


Fig. 102 Radiated Spurious Emission (802.11n-HT40, ch62, 26.5 GHz-40 GHz)

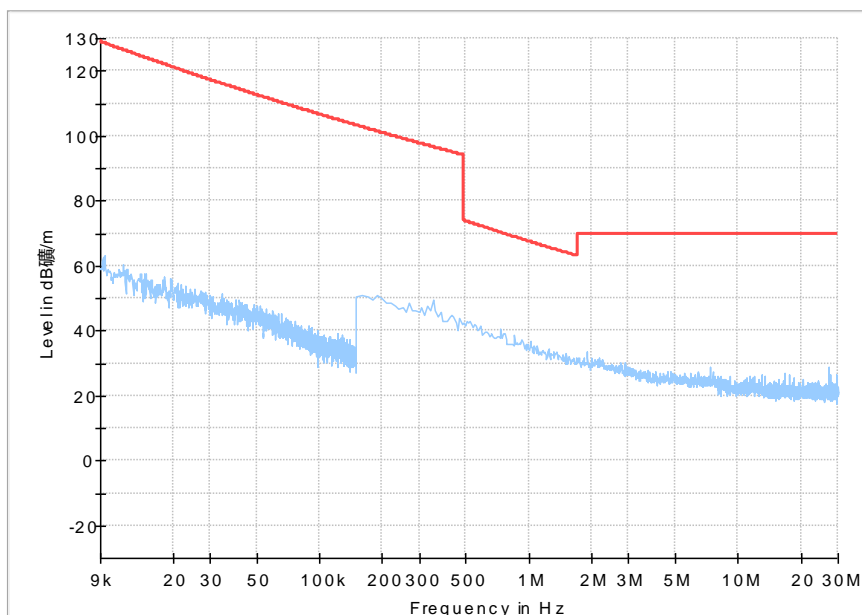


Fig. 103 Radiated Spurious Emission (9kHz-30MHz)

ANNEX A.8. Conducted Emission (150kHz- 30MHz)

Test Condition:

Voltage (V)	Frequency (Hz)
110	60

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		11a mode	Idle	
0.15 to 0.5	66 to 56	Fig.104		P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		11a mode	Idle	
0.15 to 0.5	56 to 46	Fig.104		P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: PASS

Test graphs as below:

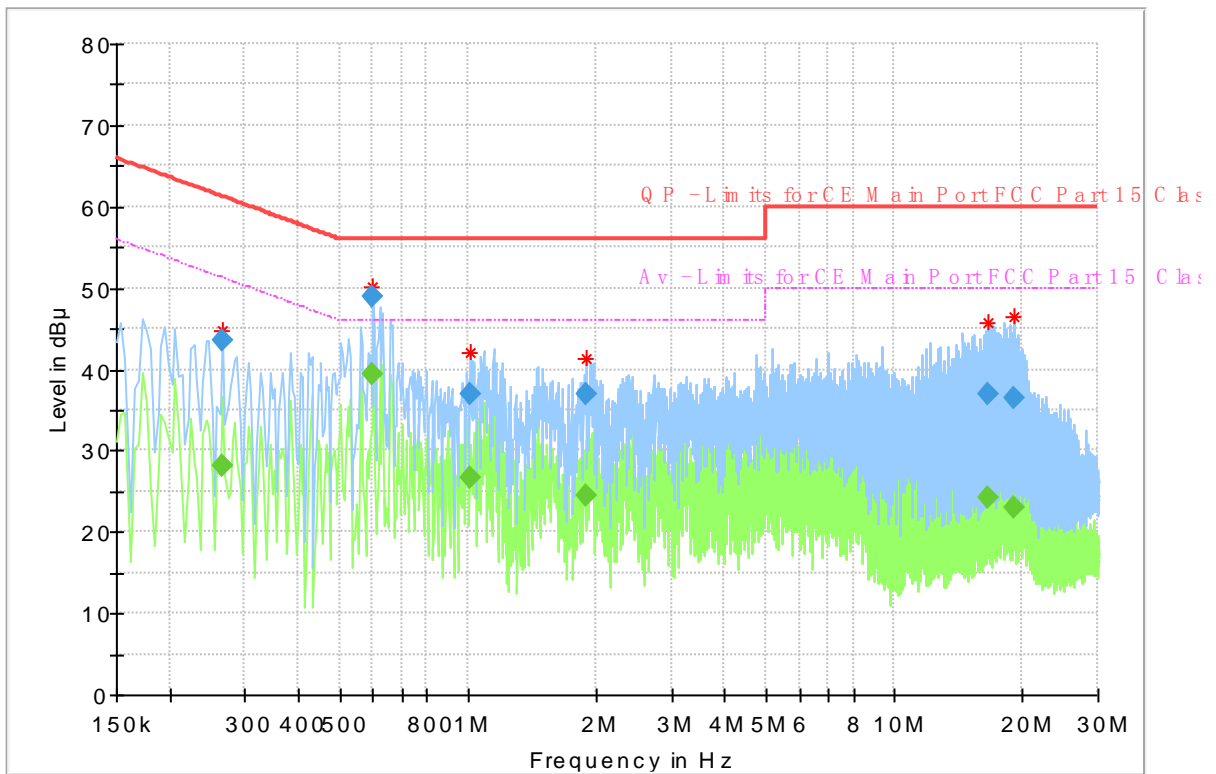


Fig. 104 Conducted Emission(802.11a, TX)

Measurement Result:

Frequency (MHz)	Quasi Peak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.265669	---	28.18	51.25	23.07	15000.0	9.000	L1	ON	9.8
0.265669	43.59	---	61.25	17.66	15000.0	9.000	L1	ON	9.8
0.597750	---	39.45	46.00	6.55	15000.0	9.000	L1	ON	9.8
0.597750	48.83	---	56.00	7.17	15000.0	9.000	L1	ON	9.8
1.008188	---	26.55	46.00	19.45	15000.0	9.000	L1	ON	9.9
1.008188	36.85	---	56.00	19.15	15000.0	9.000	L1	ON	9.9
1.899956	---	24.49	46.00	21.51	15000.0	9.000	L1	ON	10.0
1.899956	36.91	---	56.00	19.09	15000.0	9.000	L1	ON	10.0
16.518994	---	24.15	50.00	25.85	15000.0	9.000	L1	ON	13.1
16.518994	36.87	---	60.00	23.13	15000.0	9.000	L1	ON	13.1
19.164450	---	22.93	50.00	27.07	15000.0	9.000	N	ON	13.8
19.164450	36.35	---	60.00	23.65	15000.0	9.000	N	ON	13.8

ANNEX B. Accreditation Certificate

Accredited Laboratory

A2LA has accredited

EAST CHINA INSTITUTE OF TELECOMMUNICATIONS
Shanghai, People's Republic of China

for technical competence in the field of
Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-JLAC-JAF Communiqué dated April 2017).



Presented this 6th day of May 2019.



Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 3682.01
Valid to February 28, 2021

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

*****END OF REPORT*****