
	1 2		
A		Product Profile P2 SMARTPAD connects to a POS system to provide payment interface durin reading contactless card, magstripe card, smart card, 1D/2D code and ent Power Supply Method Support following methods to power on the device: 1) Power adapter, by connecting it to the DC port of the communication cate	
B	10	 Powered USB. Powered R5232. 	
C		Technical specifications For more technical specifications, please visit: www.sunmi.com. PODUCT SAFETY WARNINGS To prevent possible injury, please read all instructions and safety information operating temperature: 0°C~50°C Storage temperature: 0°C~50°C Storage temperature: 0°C~50°C * The product information listed on this page may be updated from time to time or reasons.SUNMI reserves the right to modify the product information and contents Cectification information With With <td cols<="" th=""></td>	
D		the EU declaration of conformity is available at the following internet address. INFORMATION ABOUT THE SOFTWARE The description of accessories and components, including software, which operate as intended, can be obtained in the full text of the EU declaration of internet address: www.sunmi.com RESTRICTIONS OF USE The 5150-5350MHz band is restricted to indoor use in the UK and for the for Technical specifications For more technical specifications, please visit: www.sunmi.com.	
Ε	要求: PANTONE 165C 制作工艺说明 工艺:黑色印刷+2专,包心折 材质:108g 雅粉纸		
F	1.物料编码:M05052206		

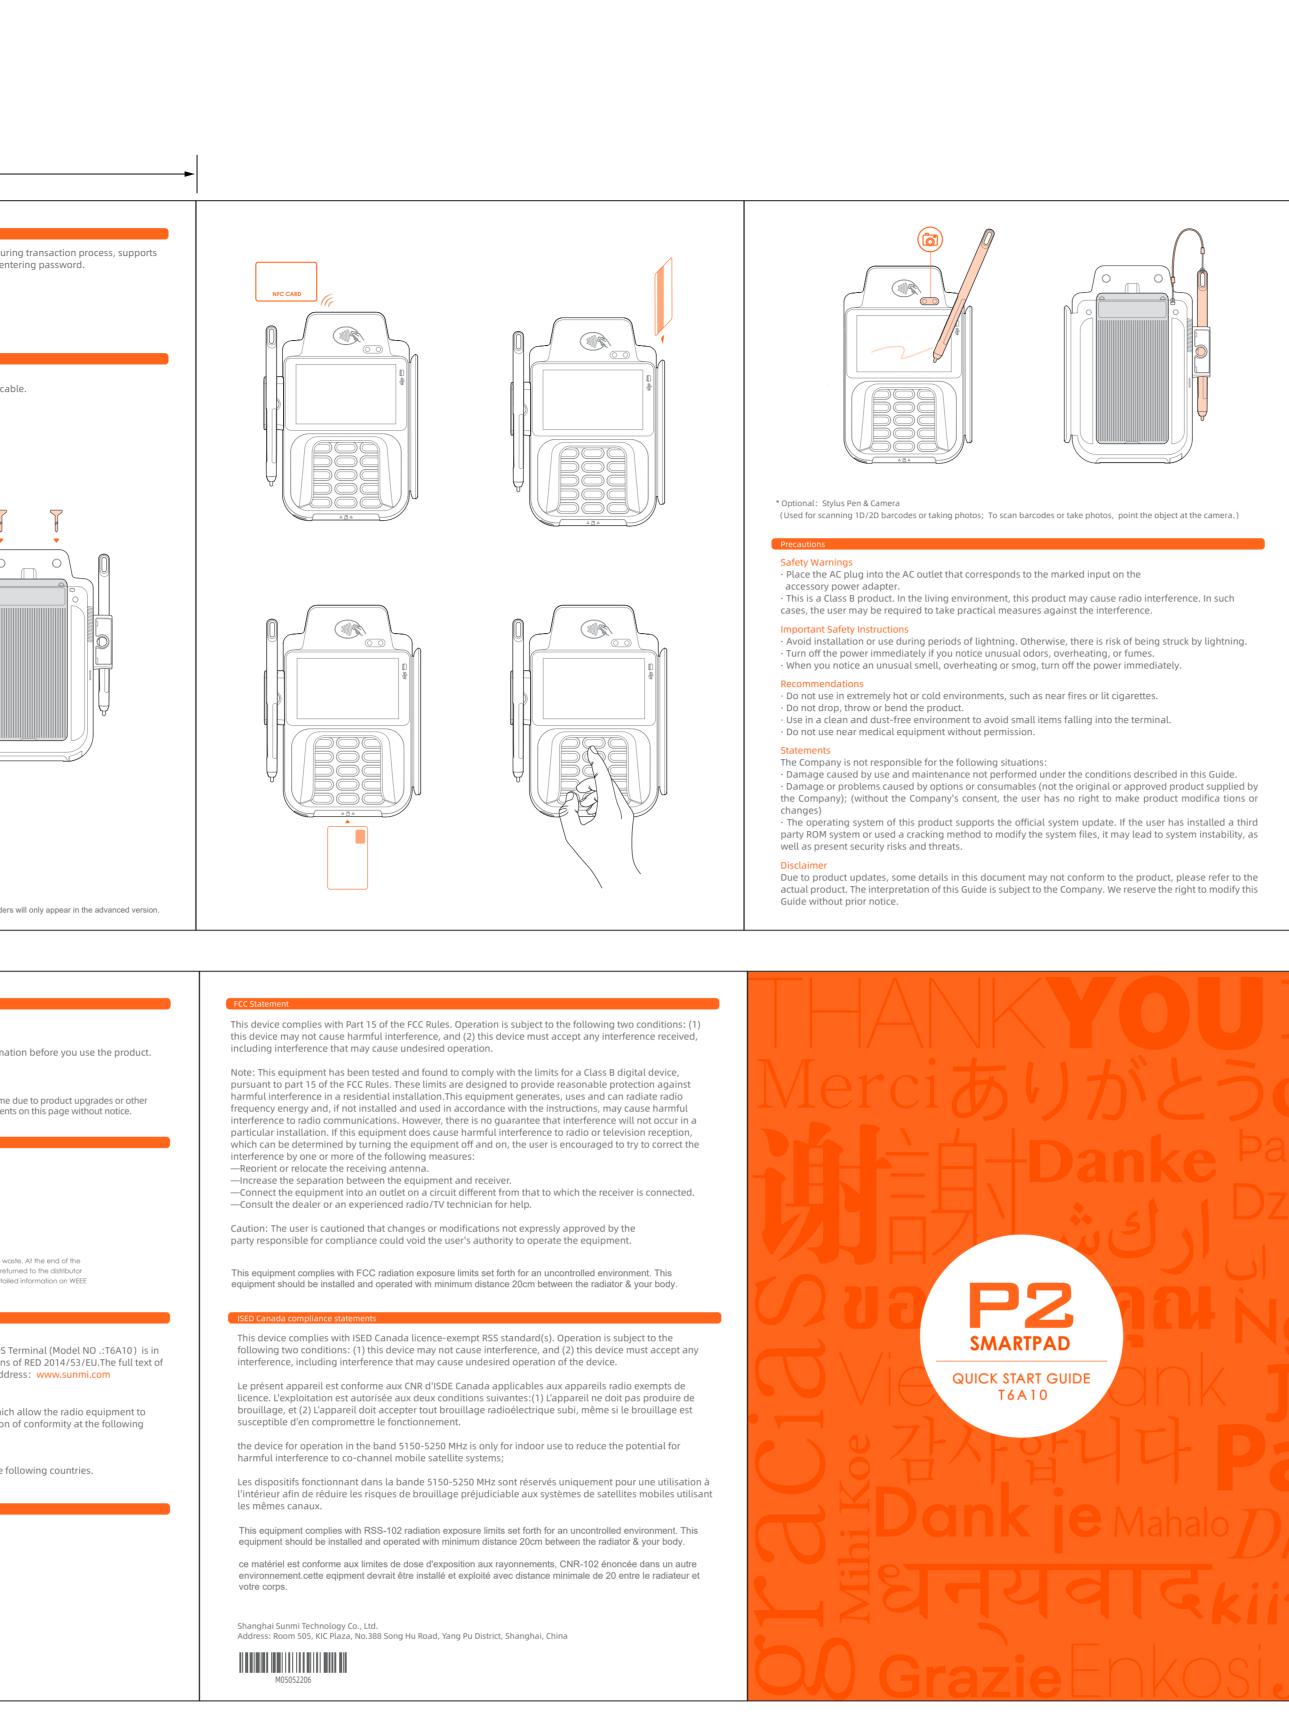

range 021C

SU			
制 图:	张亚璐		
图纸名称	M05052206	5 P2 SMARTPAD	(英
供应商	德龙	供应商料号	
发行日期	2021/12/8		
变更原因			
	6	7	

_

0

