



Industrial Internet Innovation Center (Shanghai) Co.,Ltd.

SRD TEST REPORT

PRODUCT	Smart POS System
BRAND	SUNMI
MODEL	T6F10
APPLICANT	Shanghai Sunmi Technology Co.,Ltd.
FCC ID	2AH25T6F10NA
IC	22621-T6F10
ISSUE DATE	September 9, 2024
STANDARD(S)	FCC Part15C, RSS-247 Issue 3, RSS-Gen Issue 5

Prepared by: Li Haisheng

李海生

Reviewed by: Yang Fan

杨帆

Approved by: Zhang Min

张敏

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

CONTENTS

1. SUMMARY OF TEST REPORT	3
1.1 TEST STANDARD(S)	3
1.2 REFERENCE DOCUMENTS.....	3
1.3 SUMMARY OF TEST RESULTS.....	3
1.4 DATA PROVIDED BY APPLICANT.....	4
2. GENERAL INFORMATION OF THE LABORATORY	5
2.1 TESTING LABORATORY	5
2.2 LABORATORY ENVIRONMENTAL REQUIREMENTS.....	5
2.3 PROJECT INFORMATION	5
3. GENERAL INFORMATION OF THE CUSTOMER.....	6
3.1 APPLICANT	6
3.2 MANUFACTURER	6
4. GENERAL INFORMATION OF THE PRODUCT.....	7
4.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST	7
4.2 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	7
4.3 ADDITIONAL INFORMATION	8
4.4 FREQUENCY HOPPING SYSTEM REQUIREMENTS.....	8
5. TEST CONFIGURATION INFORMATION	11
5.1 LABORATORY ENVIRONMENTAL CONDITIONS.....	11
5.2 TEST EQUIPMENTS UTILIZED.....	11
5.3 MEASUREMENT UNCERTAINTY	13
6 TEST RESULTS	15
6.1 PEAK OUTPUT POWER-CONDUCTED	15
6.2 FREQUENCY BAND EDGES-CONDUCTED	18
6.3 CONDUCTED EMISSION	21
6.4 RADIATED EMISSION.....	28
6.5 TIME OF OCCUPANCY (DWELL TIME).....	48
6.6 20dB BANDWIDTH	51
6.7 99% OCCUPIED BANDWIDTH.....	54
6.8 CARRIER FREQUENCY SEPARATION.....	57
6.9 NUMBER OF HOPPING CHANNELS	59
6.10 AC POWERLINE CONDUCTED EMISSION	61
ANNEX A: REVISED HISTORY	64
ANNEX B: ACCREDITATION CERTIFICATE.....	65

1. Summary of Test Report

1.1 Test Standard(s)

No.	Test Standard	Title	Version
1	FCC Part15C	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.	--
2	RSS-247 Issue 3	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices	2023
3	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus	2021

1.2 Reference Documents

No.	Test Standard	Title	Version
1	ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013
2	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for Performing Compliance Measurements on Frequency Hopping Spread Spectrum systems (DSS) Operating Under §15.247	--

NOTE: The standard of KDB 558074 D01 15.247 Meas Guidance v05r02 has not been accredited by A2LA.

1.3 Summary of Test Results

No.	Measurement Items	FCC Rules	IC Rules	Verdict
1	Maximum Peak Output Power	15.247(b)	RSS-247 5.4	Pass
2	20dB Occupied Bandwidth	15.247(a)	RSS-247 5.1	Pass
3	99% Occupied Bandwidth	N/A	RSS-GEN 6.7	Pass
4	Band Edges Compliance	15.247 (d)	RSS-247 5.5	Pass
5	Time Of Occupancy (Dwell Time)	15.247(a)	RSS-247 5.1	Pass
6	Carrier Frequency Separation	15.247(a)	RSS-247 5.1	Pass
7	Number Of Hopping Channels	15.247(a)	RSS-247 5.1	Pass
8	Transmitter Spurious Emission- Conducted	15.247(d)	RSS-247 5.5	Pass
9	Transmitter Spurious Emission- Radiated	15.247,15.209,15.205	RSS-GEN 8.9, 8.10	Pass
10	AC Powerline Conducted Emission	15.207	RSS-GEN 8.8	Pass

11	Antenna requirement	15.203/15.247(c)	RSS Gen 6.8, RSS-247 5.4	Pass ^{Note 2}
Note 1:				
The T6F10 manufactured by Shanghai Sunmi Technology Co.,Ltd. is a new product for testing. Industrial Internet Innovation Center (Shanghai) Co., Ltd. only performed test cases which identified with Pass/Fail/Inc result in section 1.3.				
Industrial Internet Innovation Center (Shanghai) Co., Ltd. has verified that the compliance of the tested device specified in section 4 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 1 of this test report.				
Note 2:				
Bluetooth used a FPC antenna with max Gain 2.21dBi that complied with FCC 15.203 and ISED rules Requirement.				

Note:

- a. All the test data for each data were verified, but only the worst case was reported.
- b. The GFSK, $\pi/4$ DQPSK and 8DPSK were set in DH5 for GFSK, 2-DH5 for $\pi/4$ DQPSK, 3-DH5 for 8DPSK.

1.4 Data Provided by Applicant

No.	Item(s)	Data
1	Antenna gain of EUT	2.21 dBi

Note: The data of antenna gain is provided by the Antenna specification may affect the validity of the test results in this report, and the impact and consequences of this shall be undertaken by the customer.

2. General Information of The Laboratory

2.1 Testing Laboratory

Lab Name	Industrial Internet Innovation Center (Shanghai) Co.,Ltd.
Address	Building 4, No. 766, Jingang Road, Pudong, Shanghai, China
Telephone	021-68866880
FCC Registration No.	708870
FCC Designation No.	CN1364
IC Designation No.	10766A
CAB identifier	CN0067

2.2 Laboratory Environmental Requirements

Temperature	15°C~35°C
Relative Humidity	25%RH~75%RH
Atmospheric Pressure	86kPa~106kPa

2.3 Project Information

Project Manager	Gao Hongning
Test Date	July 10,2024 to August 25,2024

3. General Information of The Customer

3.1 Applicant

Company	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505, No.388 Song Hu Road, Yang Pu District, Shanghai, China
Telephone	18826519551

3.2 Manufacturer

Company	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505, No.388 Song Hu Road, Yang Pu District, Shanghai, China
Telephone	18826519551

4. General Information of The Product

4.1 Product Description for Equipment under Test

Product Name	Smart POS System
Model name	T6F10
Date of Receipt	S05aa:July 10,2024 S07aa:July 10,2024
EUT ID*	S05aa/S07aa
SN/IMEI	S05aa: 86839307000286'868393070002282 S07aa: 868393070001573'868393070003579
Supported Radio Technology and Bands	WCDMA Band II/IV/V LTE Band 2/4/5/7/12/13/14/17/25/26/30/38/41/66/71 WLAN 802.11b/g/n WLAN 802.11a/n/ac BT 5.0 BR/EDR/BLE NFC GPS/Galileo
Hardware Version	V1.0(NA)
Software Version	V3.0.0
HVIN	T6F10
FCC ID	2AH25T6F10NA
IC	22621-T6F10
Power Rating	DC 7.7V form battery,DC 5V form adapter

NOTE1: EUT ID is the internal identification code of the laboratory.

NOTE2: Samples in the test report are provided by the customer. The test results are only applicable to the samples received by the laboratory.

4.2 Internal Identification of AE used during the test

AE ID*	Description	Model	SN/Remark
AE1	RF Cable	N/A	N/A
CA01	Adapter	TPA-141A050200UU01	N/A
CB01	Adapter	UC13US	N/A
CC01	Adapter	TPA-23A050200UU01	N/A
UA01	AC Cable	N/A	N/A
BA02	Battery	HPPA	Guangdong Highpower NewEnergy Technology

Report No: 24T04I300106-033

Co., Ltd.

NOTE1: AE ID is the internal identification code of the laboratory.

NOTE2: By verifying that CC01+BA02 is the worst battery and adapter combination, this battery and adapter are used in all tests.

4.3 Additional Information

Bluetooth Frequency	2402MHz-2480MHz
Bluetooth Channel	Ch0-78
Bluetooth Modulation	GFSK; π/4 DQPSK; 8DPSK

Test frequency list:

GFSK	Channel	0	39	78
	Freq. (MHz)	2402	2441	2480
π/4 DQPSK	Channel	0	39	78
	Freq. (MHz)	2402	2441	2480
8DPSK	Channel	0	39	78
	Freq. (MHz)	2402	2441	2480

Note: This report is for BT only.

Emissions Information:

TestMode	Frequency Min(MHz)	Frequency Max(MHz)	Max OutPut Power EIRP(dBm)	Max OutPut Power EIRP(W)	OBW (KHz)	Necessary Bandwidth & Emission Classification
DH5	2402	2480	11.04	0.0127	765	765KF1D
2DH5	2402	2480	10.72	0.0118	1155	1M16G1D
3DH5	2402	2480	10.68	0.0117	1167	1M17G1D

4.4 Frequency Hopping System Requirements

Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over

the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

According to ISED RSS 247 Section 5.1(a)

The bandwidth of a frequency hopping channel is the 20 dB emission bandwidth, measured with the hopping stopped. The system's radio frequency (RF) bandwidth is equal to the channel bandwidth multiplied by the number of channels in the hopset. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels.

The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divide into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The normal hop is 1 600 hops/s.


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage, and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones. Number of shift register stages: 9

Length of pseudo-random sequence: $2^9 - 1 = 511$ bits

Longest sequence of zeros: 8 (non-inverted signal)

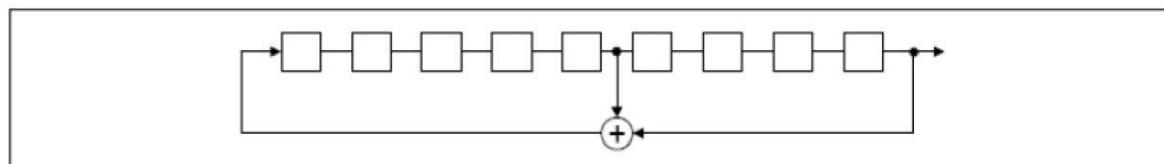

Linear Feedback Shift Register for Generation of the PRBS sequence

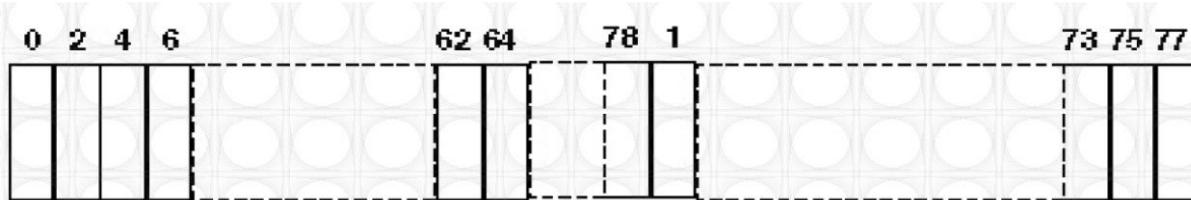

Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

Equal Hopping Frequency Use

All Bluetooth units participating in the piconet are time and hop-synchronized to the channel.

Example of a 79 hopping sequence in data mode:

35, 27, 6, 44, 14, 61, 74, 32, 1, 11, 23, 2, 55, 65, 29, 3, 9, 52, 78, 58, 40, 25, 0, 7, 18, 26, 76, 60, 47, 50, 2, 5, 16, 37, 70, 63, 66, 54, 20, 13, 4, 8, 15, 21, 26, 10, 73, 77, 67, 69, 43, 24, 57, 39, 46, 72, 48, 33, 17, 31, 75, 19, 41, 62, 68, 28, 51, 66, 30, 56, 34, 59, 71, 22, 49, 64, 38, 45, 36, 42, 53

Each Frequency used equally on the average by each transmitter

Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 and ISED RSS-247 rules.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH- enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

5. Test Configuration Information

5.1 Laboratory Environmental Conditions

5.1.1 Permanent Facilities

Relative Humidity	Min. = 45 %, Max. = 55 %		
Atmospheric Pressure	101kPa		
Temperature	Normal	Minimum	Maximum
	25°C	-10°C	50°C
Working Voltage of EUT	Normal	Minimum	Maximum
	7.7V	6.0V	8.8V

5.2 Test Equipments Utilized

5.2.1 Conducted Test System

No.	Name	Model	S/N	SW Version	HW Version	Manufacturer	Cal. Date	Cal. Interval
1	Test Software	TS1120	10671	V3.2.22	N/A	Tonscend	N/A	N/A
2	Automatic control unit	JS0806 -2	2218060621	N/A	N/A	Tonscend	2024-03-25	1 year
3	Wireless communication comprehensive tester	CMW270	100919	V3.5.137	N/A	R&S	2023-07-26	1 year
							2024-07-25	
4	Spectrum Analyzer	FSQ40	200063	V4.75	N/A	R&S	2023-10-16	1 year
5	Vector Signal Generator	SMU200A	104684	V03.20.286.21	N/A	R&S	2023-07-26	1 year
							2024-07-25	
6	Vector Signal Generator	SMBV100A	257904	V4.15.125.49	N/A	R&S	2023-12-19	1 Year
7	Programmable Power Supply	Keithley 2303	4039070	N/A	N/A	Keithley	2024-06-07	1 Year
8	Temperature box	B-TF-107C	BTF107C-201804107	N/A	N/A	Boyi	2024-06-07	1 Year
9	Network test unit AP	GT-AXE11000	N2IG0X401637KWF	V3.0.0.4.386_45940	N/A	ASUS	N/A	N/A

5.2.2 Radiated Emission Test System

No.	Name	Model	S/N	SW Version	HW Version	Manufacturer	Cal. Date	Cal. Interval
1	Universal Radio Communication Tester	CMU200	123126	V5.2.1	B12	R&S	2023-10-16	1 Year
2	Universal Radio Communication Tester	CMW500	104178	V3.7.20	1206.06 00.00	R&S	2023-10-16	1 Year
3	EMI Test Receiver	ESU40	100307	V5.1-24-3	01	R&S	2023-12-19	1 Year
4	TRILOG Broadband Antenna	VULB9163	01345	N/A	N/A	Schwarzbeck	2024-03-29	1 Year
5	Double- ridged Waveguide Antenna	ETS-3117	00135890	N/A	N/A	ETS	2024-03-16	1 Years
6	EMI Test Software	EMC32 V10.35.02	N/A	V10.35.02	N/A	R&S	N/A	N/A
7	Horn Antenna	3160-09	LM6321	N/A	N/A	R&S	2023-07-16 2024-07-15	1 Years
8	Horn Antenna	3160-10	LM5942	N/A	N/A	R&S	2023-07-16 2024-07-15	1 Years
9	Loop Antenna	AL-130R	121083	N/A	N/A	COM-POWER	2023-09-13	1 year
10	Preamplifier	SCU08F1	8320024	N/A	N/A	R&S	2023-10-16	1 year
11	Preamplifier	SCU18	10155	N/A	N/A	R&S	2023-10-16	1 year
12	Preamplifier	SCU26	10025	N/A	N/A	R&S	2023-10-16	1 year
13	Preamplifier	SCU40	10020	N/A	N/A	R&S	2023-10-16	1 year
14	2-Line V-Network	ENV216	101380	N/A	N/A	R&S	2023-12-19	1 year
15	EMI Test Software	EMC32 V10.35.02	N/A	N/A	N/A	R&S	N/A	N/A
16	Test Receiver	ESCI	101235	V5.1-24-3	0	R&S	2023-12-19	1 year
17	Antenna Tower	TPMDC-LF	N/A	N/A	N/A	Top Precision	N/A	N/A
18	Antenna Tower	TPMDC-HF	N/A	N/A	N/A	Top Precision	N/A	N/A

5.2.3 Test Environment

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Ground system resistance	< 0.5 Ω
Temperature	Min. = 15 °C, Max. = 35 °C

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1 (9.8 meters×6.7 meters×6.7 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB, 30MHz to 1GHz

5.3 Measurement Uncertainty

Measurement Uncertainty of Conduction test

Measurement Items	Range	Confidence Level	Calculated Uncertainty
20dB Emission Bandwidth	2400–2483.5MHz	95%	±1.9%
Carrier Frequency Separation	2400–2483.5MHz	95%	±1.9%
Maximum Power Spectral Density Level	2400–2483.5MHz	95%	±0.98 dB
Number of Hopping Channel	2400–2483.5MHz	95%	±1.9%
Time of Occupancy	2400–2483.5MHz	95%	±0.11%

Report No: 24T04I300106-033

Max Peak Conducted Output Power	2400–2483.5MHz	95%	$\pm 0.98 \text{ dB}$
Band-edge Spurious Emission	2400–2483.5MHz	95%	$\pm 1.21 \text{ dB}$
Conducted RF Spurious Emission	9kHz-40GHz	95%	9kHz-7GHz: $\pm 1.21 \text{ dB}$ 7GHz-40GHz: $\pm 3.31 \text{ dB}$

Measurement Uncertainty of Radiation test

Measurement Items	Uncertainty(dB)
Radiated Emission 30MHz-1000MHz	± 5.10
Radiated Emission 1000MHz-18000MHz	± 5.66
Radiated Emission 18000MHz-40000MHz	± 5.22
AC Powerline Conducted Emission	± 4.38

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

6 Test Results

6.1 Peak Output Power-Conducted

6.1.1 Measurement Limit

Standard	Conducted Limit (dBm)	EIRP Limit(dBm)
FCC 47 Part 15.247(b)	GFSK: ≤ 30 , pi/4-DQPSK and 8DPSK ≤ 20.97	N/A
RSS-247 5.4(b)	GFSK: ≤ 30 , pi/4-DQPSK and 8DPSK ≤ 20.97	≤ 36

6.1.2 Test Condition


Hopping Mode	RBW	VBW	Span	Sweeptime
Hopping OFF	3MHz	10MHz	9MHz	Auto

6.1.3 Test Procedure

The measurement is according to ANSI C63.10 clause 7.8.5.

1. The output power of EUT was connected to the spectrum analyzer by cable and divide. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Use the following spectrum analyzer settings:
 - a) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - b) RBW > 20 dB bandwidth of the emission being measured.
 - c) VBW \geq RBW.
 - d) Sweep: Auto.
 - e) Detector function: Peak.
 - f) Trace: Max hold.
4. Allow trace to stabilize.
5. Use the marker-to-peak function to set the marker to the peak of the emission.
6. The indicated level is the peak output power, after any corrections for external attenuators and cables.
7. Record the results.

6.1.4 Test setup

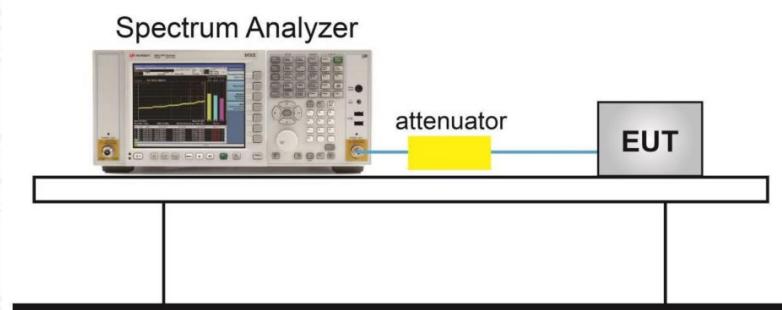


Note: The attenuator shown in the figure is the attenuation of the entire test system.


6.1.5 Measurement Results

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit[dBm]	Verdict
DH5	Ant1	2402	8.83	≤30	11.04	≤36	PASS
DH5	Ant1	2441	8.45	≤30	10.66	≤36	PASS
DH5	Ant1	2480	8.57	≤30	10.78	≤36	PASS
2DH5	Ant1	2402	8.51	≤20.97	10.72	≤36	PASS
2DH5	Ant1	2441	8.08	≤20.97	10.29	≤36	PASS
2DH5	Ant1	2480	7.82	≤20.97	10.03	≤36	PASS
3DH5	Ant1	2402	8.47	≤20.97	10.68	≤36	PASS
3DH5	Ant1	2441	8.09	≤20.97	10.30	≤36	PASS
3DH5	Ant1	2480	7.77	≤20.97	9.98	≤36	PASS

Note: Bold font is the maximum Value

Test Graphs

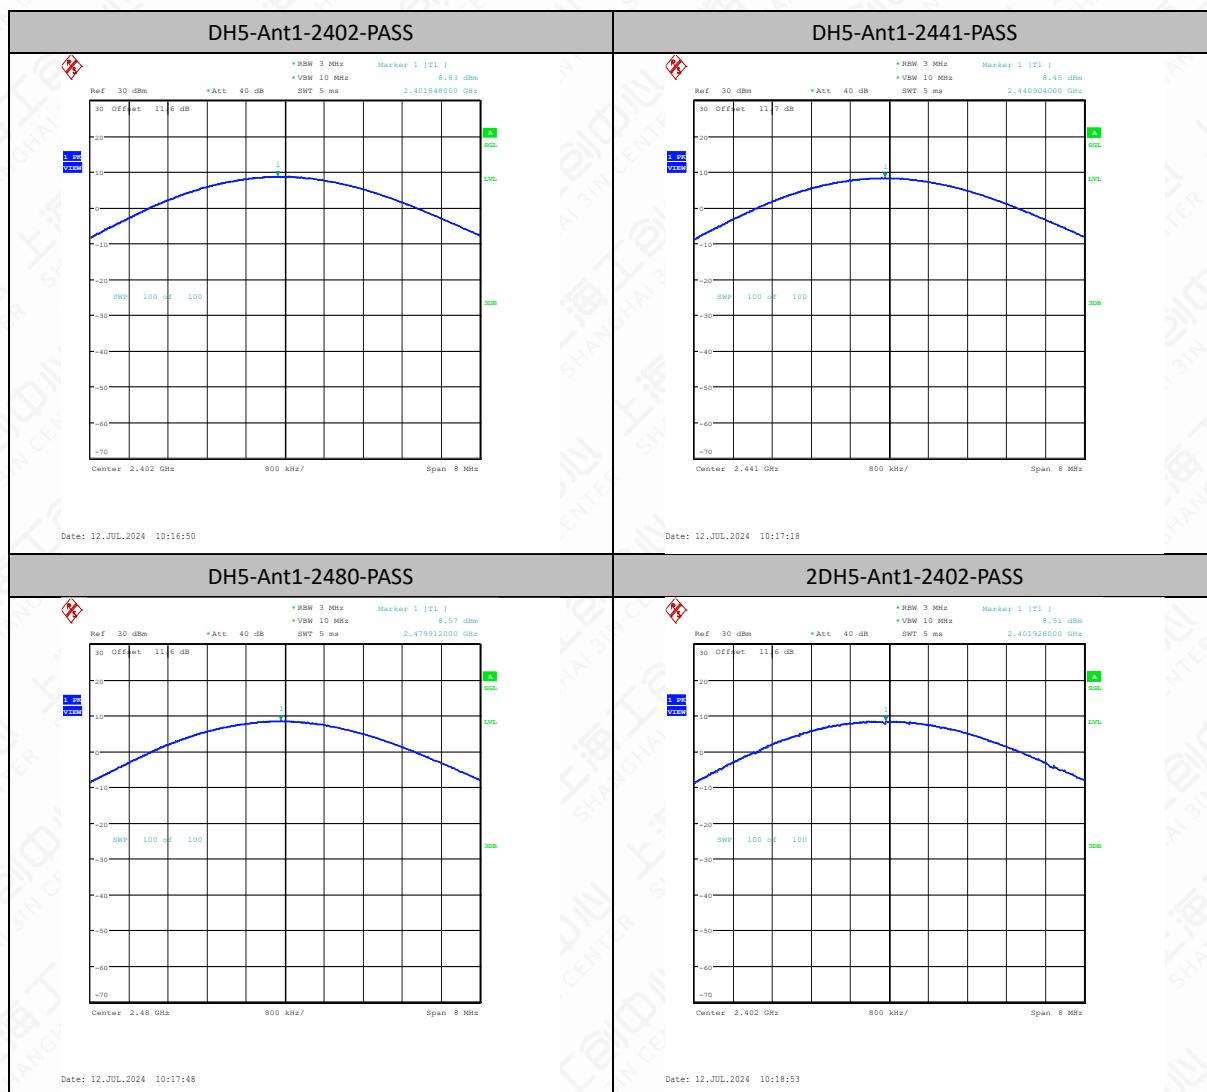

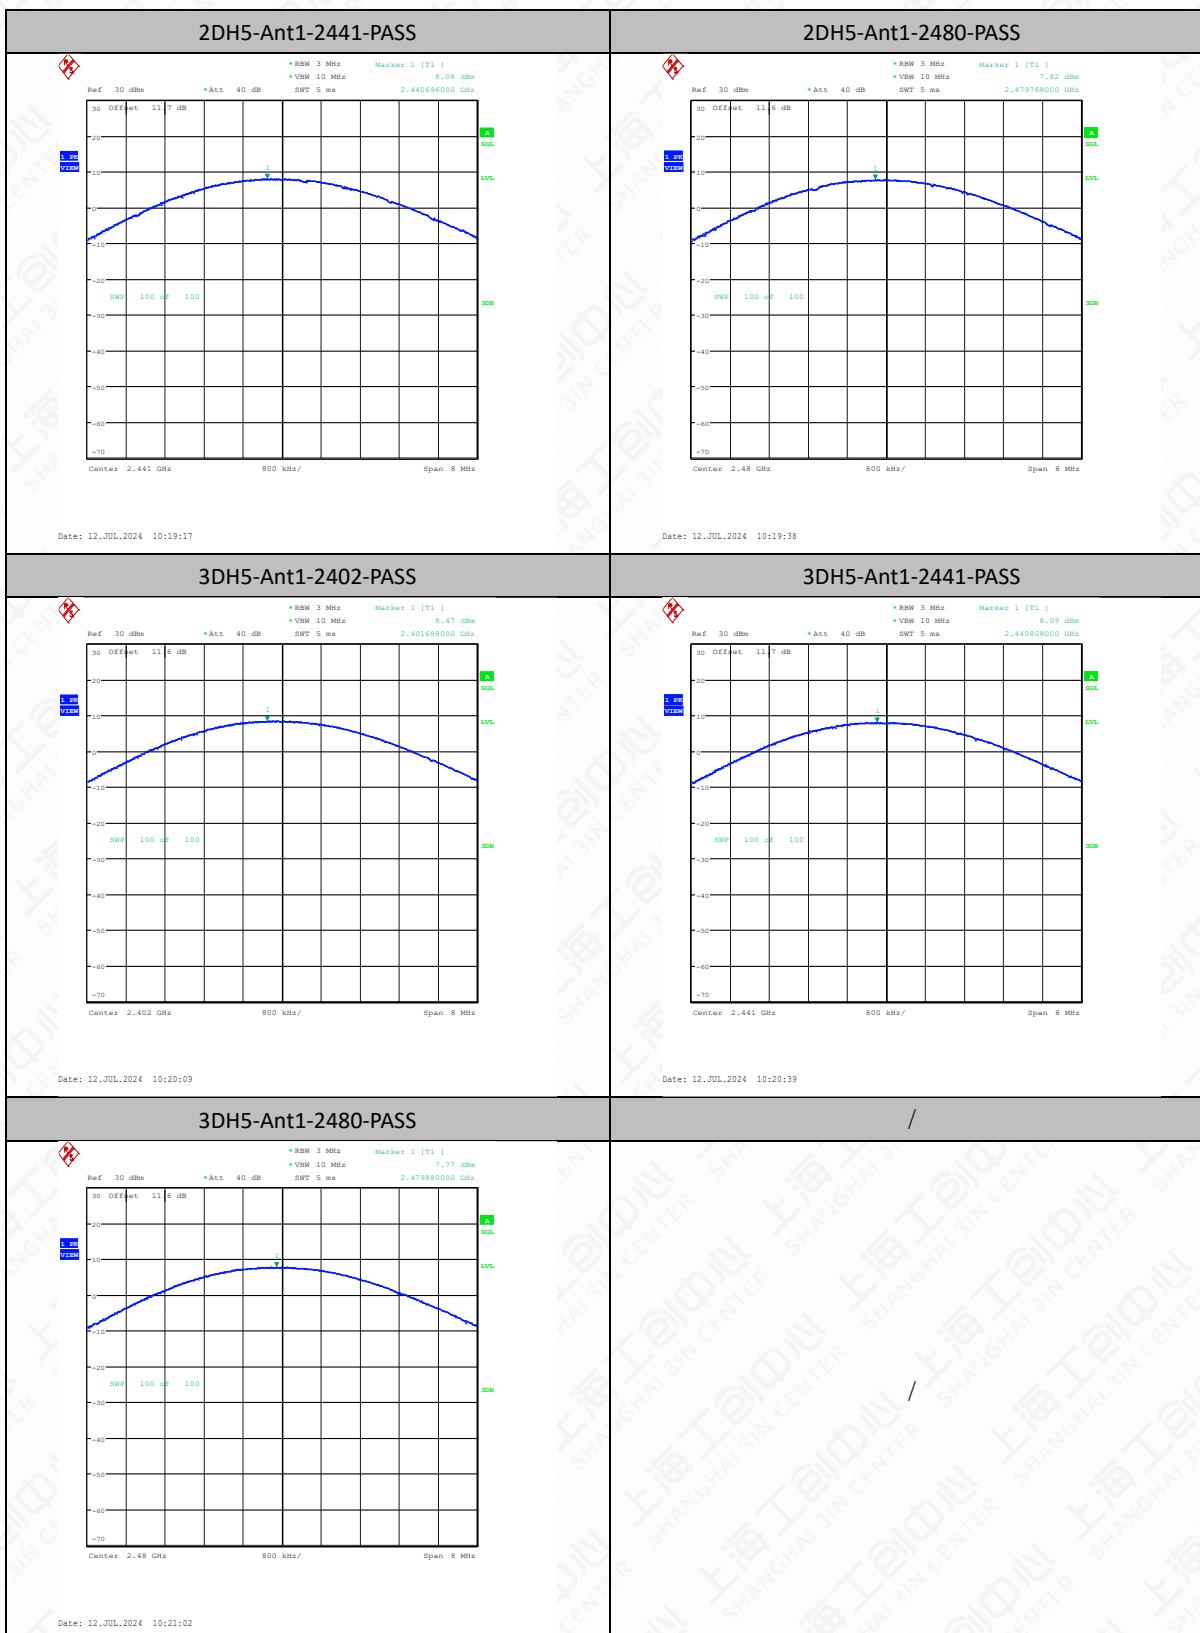

6.2 Frequency Band Edges-Conducted

6.2.1 Measurement Limit


Standard	Limit(dBc)
FCC 47 CFR Part 15.247(d)	>20
RSS-247 5.5	>20

6.2.2 Test procedures

The measurement is according to ANSI C63.10 clause 7.8.6.

1. Connect the EUT to spectrum analyzer.
2. Set RBW=100KHz, VBW=300KHz, span more than 1.5 times channel bandwidth (2MHz).
3. Detector =peak, sweep time=auto couple, trace mode=max hold.Allow sweep to continue until the trace stabilizes.

6.2.3 Test setup

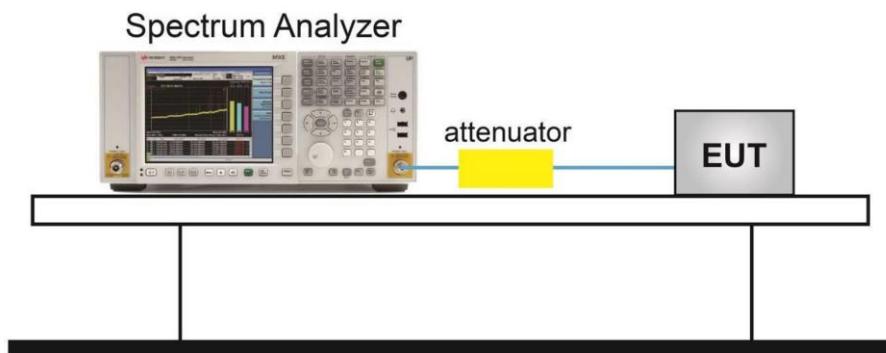


Note: The attenuator shown in the figure is the attenuation of the entire test system.


6.2.4 Measurement Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	4.96	-43.96	≤-15.04	PASS
DH5	Ant1	High	2480	6.45	-43.4	≤-13.55	PASS
DH5	Ant1	Low	Hop_2402	3.86	-44.51	≤-16.14	PASS
DH5	Ant1	High	Hop_2480	8.42	-43.54	≤-11.58	PASS
2DH5	Ant1	Low	2402	3.69	-44.1	≤-16.31	PASS
2DH5	Ant1	High	2480	4.64	-43.54	≤-15.36	PASS
2DH5	Ant1	Low	Hop_2402	3.23	-42.99	≤-16.77	PASS
2DH5	Ant1	High	Hop_2480	6.05	-43.26	≤-13.95	PASS
3DH5	Ant1	Low	2402	4.09	-44.14	≤-15.91	PASS
3DH5	Ant1	High	2480	4.14	-43.45	≤-15.86	PASS
3DH5	Ant1	Low	Hop_2402	-0.69	-43.88	≤-20.69	PASS

Report No: 24T04I300106-033

3DH5	Ant1	High	Hop_2480	7.54	-43	≤ -12.46	PASS
------	------	------	----------	------	-----	---------------	------

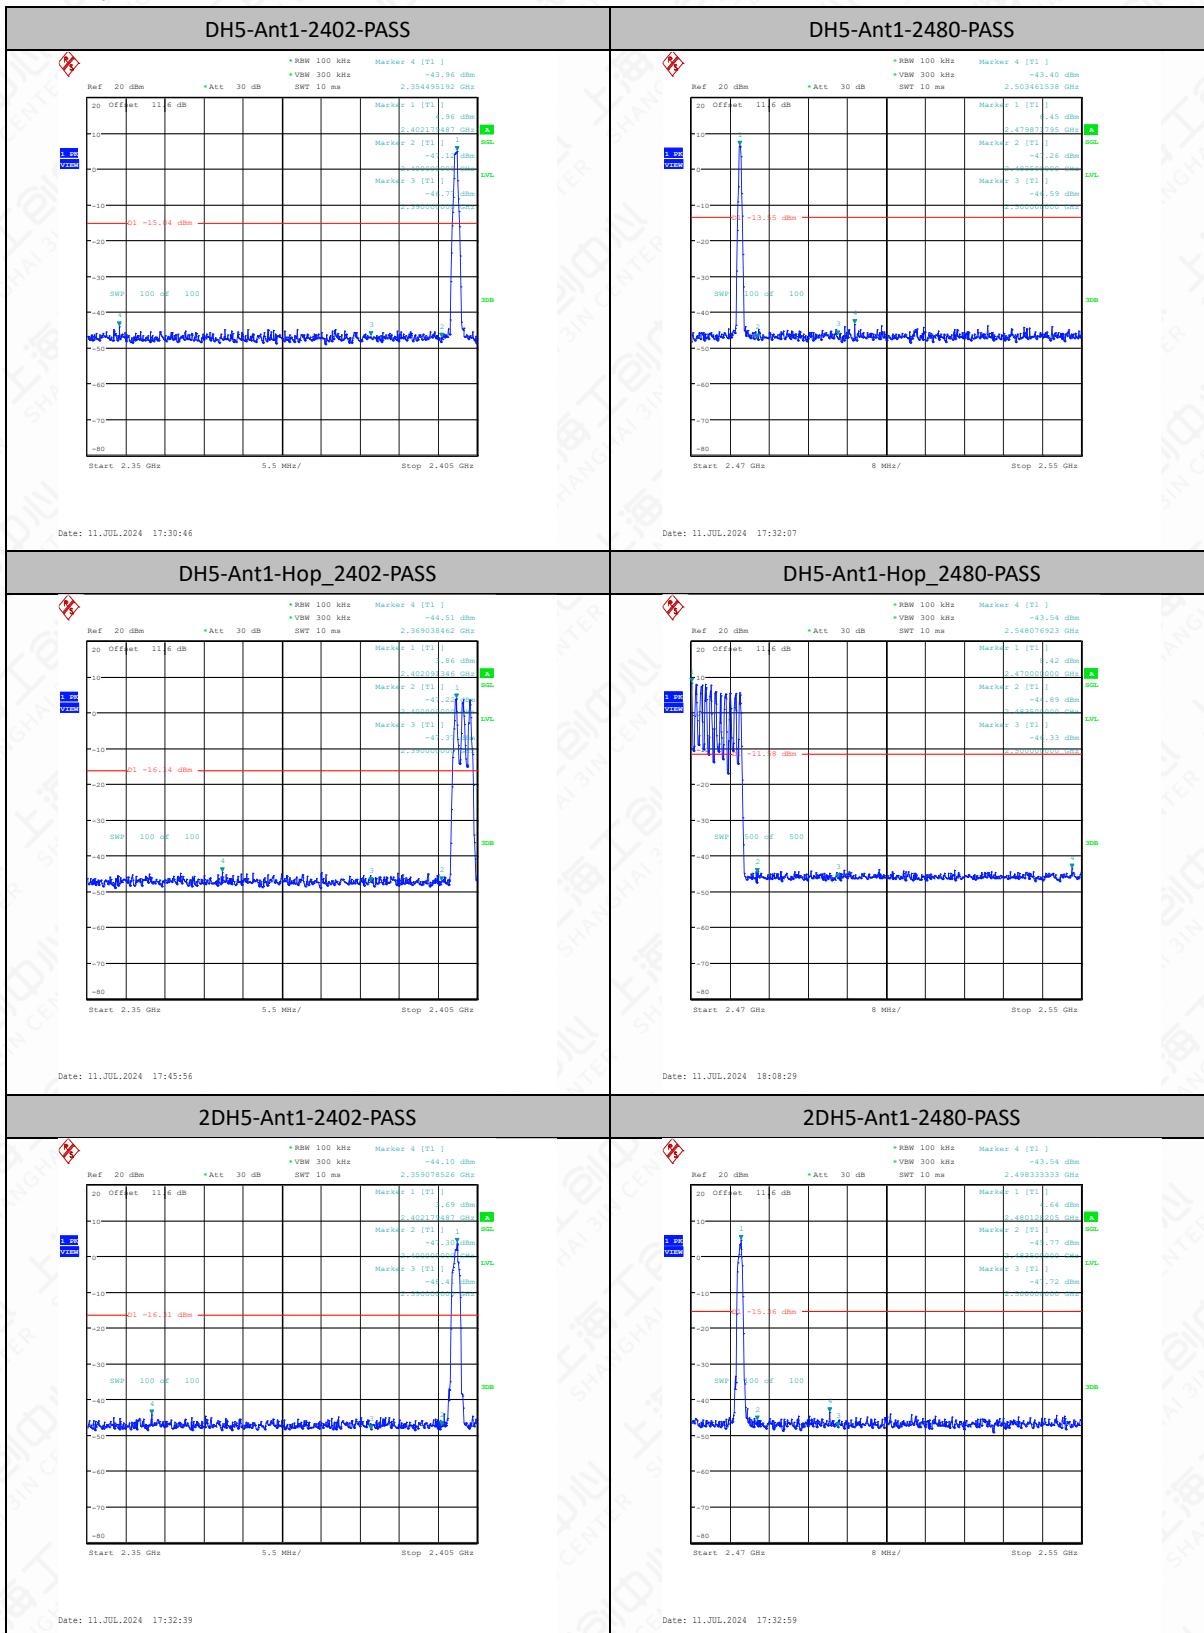Test Graphs

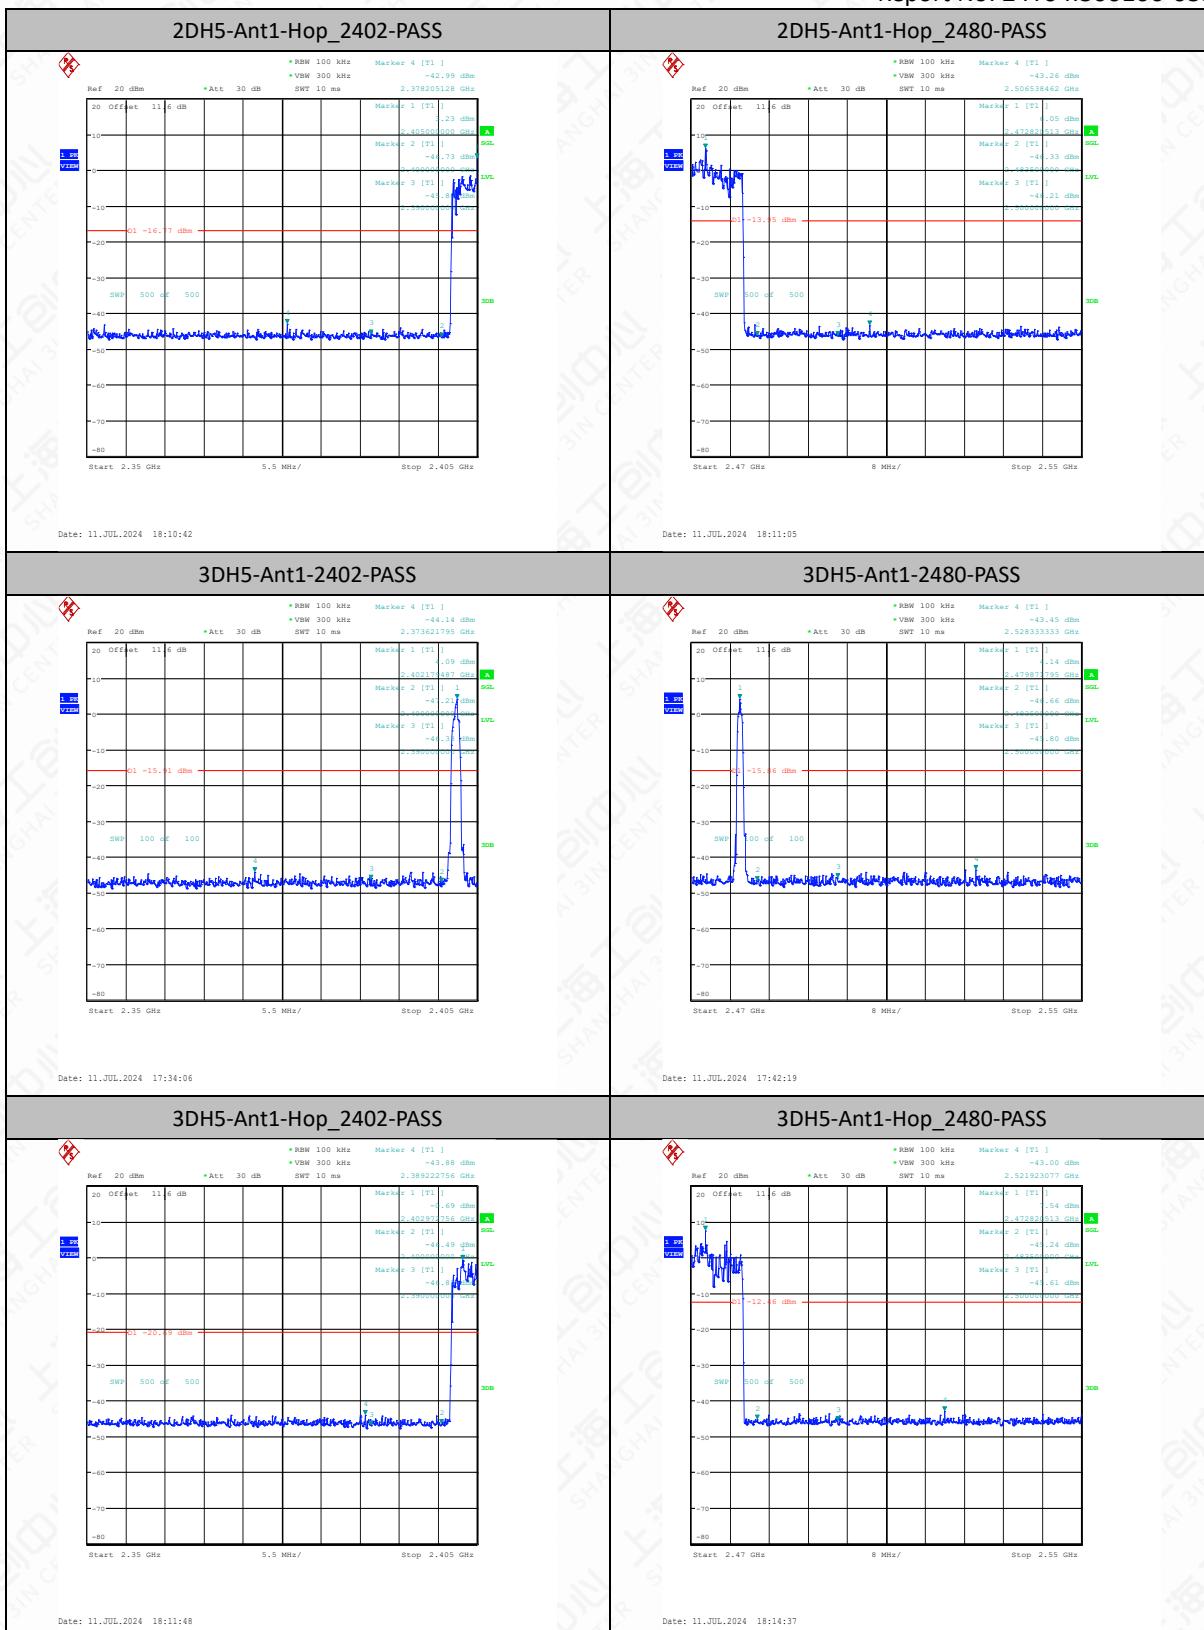


6.3 Conducted Emission

6.3.1 Measurement Limit

Standard	Limit
FCC 47 CFR Part15.247 (d)	20dB below peak output power in 100kHz bandwidth
RSS-247 5.5	20dB below peak output power in 100kHz bandwidth


6.3.2 Test procedures

The measurement is according to ANSI C63.10 clause 7.8.8.

1. Connect the EUT to spectrum analyzer.
2. Set RBW=100KHz, VBW=300KHz.
3. Detector =peak, sweep time=auto couple, trace mode=max hold

Note: Not recorded emission from 9 KHz to 30 MHz as emission level at least 20dBc lower than emission limit.

6.3.3 Test Setup

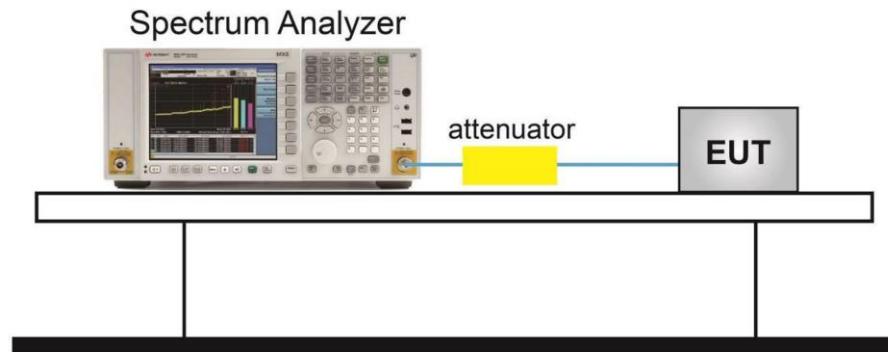

Note: The attenuator shown in the figure is the attenuation of the entire test system.


6.3.4 Measurement Results


TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	0~Reference	4.79	4.79	---	PASS
DH5	Ant1	2402	30~1000	4.79	-54.81	≤-15.21	PASS
DH5	Ant1	2402	1000~26500	4.79	-50.95	≤-15.21	PASS
DH5	Ant1	2441	0~Reference	3.46	3.46	---	PASS
DH5	Ant1	2441	30~1000	3.46	-54.73	≤-16.54	PASS
DH5	Ant1	2441	1000~26500	3.46	-51.18	≤-16.54	PASS
DH5	Ant1	2480	0~Reference	5.08	5.08	---	PASS
DH5	Ant1	2480	30~1000	5.08	-55.15	≤-14.92	PASS
DH5	Ant1	2480	1000~26500	5.08	-50.91	≤-14.92	PASS
2DH5	Ant1	2402	0~Reference	3.71	3.71	---	PASS


Report No: 24T04I300106-033

2DH5	Ant1	2402	30~1000	3.71	-54.89	≤ -16.29	PASS
2DH5	Ant1	2402	1000~26500	3.71	-50.47	≤ -16.29	PASS
2DH5	Ant1	2441	0~Reference	2.29	2.29	---	PASS
2DH5	Ant1	2441	30~1000	2.29	-54.89	≤ -17.71	PASS
2DH5	Ant1	2441	1000~26500	2.29	-50.2	≤ -17.71	PASS
2DH5	Ant1	2480	0~Reference	4.11	4.11	---	PASS
2DH5	Ant1	2480	30~1000	4.11	-55.03	≤ -15.89	PASS
2DH5	Ant1	2480	1000~26500	4.11	-50.17	≤ -15.89	PASS
3DH5	Ant1	2402	0~Reference	3.65	3.65	---	PASS
3DH5	Ant1	2402	30~1000	3.65	-54.71	≤ -16.35	PASS
3DH5	Ant1	2402	1000~26500	3.65	-50.61	≤ -16.35	PASS
3DH5	Ant1	2441	0~Reference	2.59	2.59	---	PASS
3DH5	Ant1	2441	30~1000	2.59	-37.12	≤ -17.41	PASS
3DH5	Ant1	2441	1000~26500	2.59	-51.56	≤ -17.41	PASS
3DH5	Ant1	2480	0~Reference	4.11	4.11	---	PASS
3DH5	Ant1	2480	30~1000	4.11	-55.07	≤ -15.89	PASS
3DH5	Ant1	2480	1000~26500	4.11	-50.61	≤ -15.89	PASS


Test Graphs

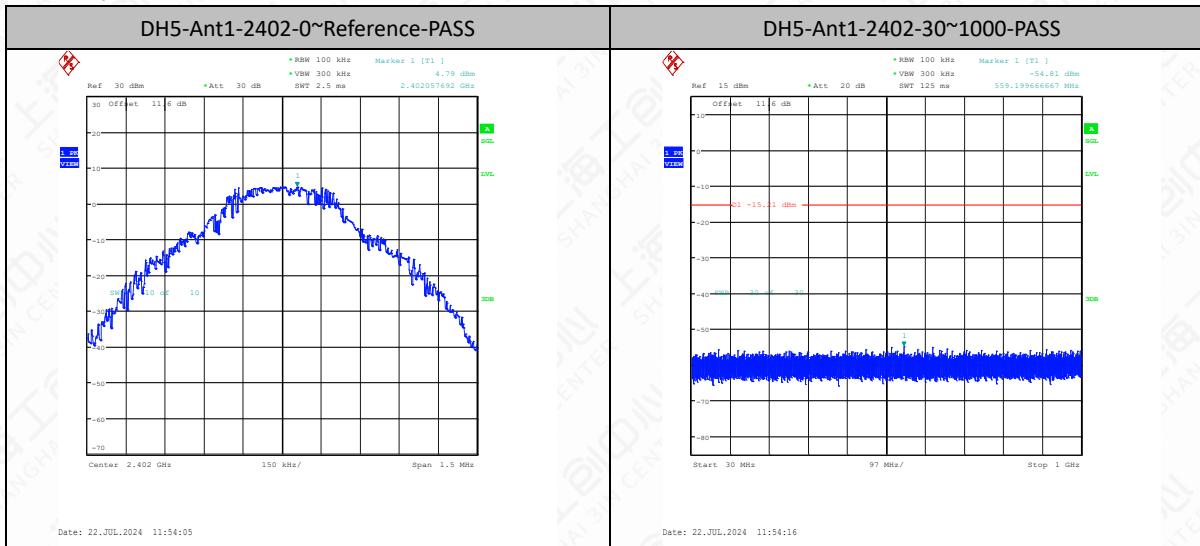

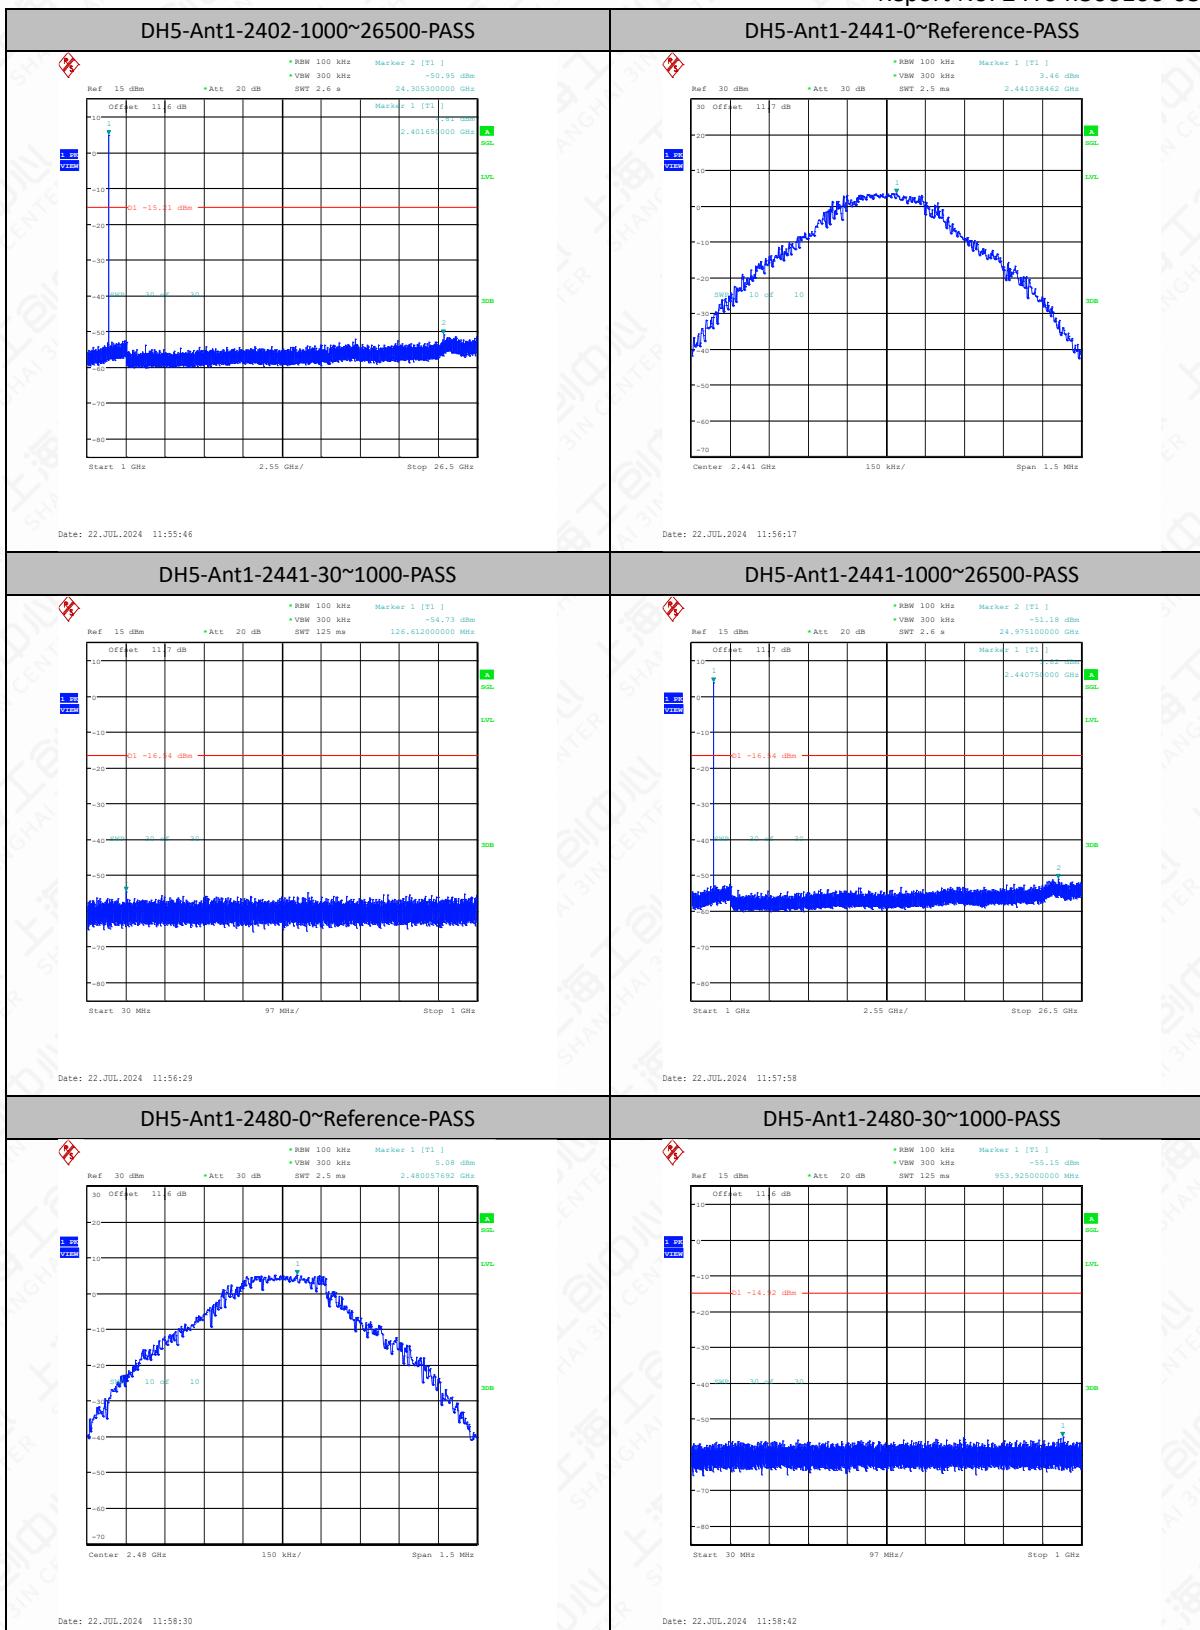


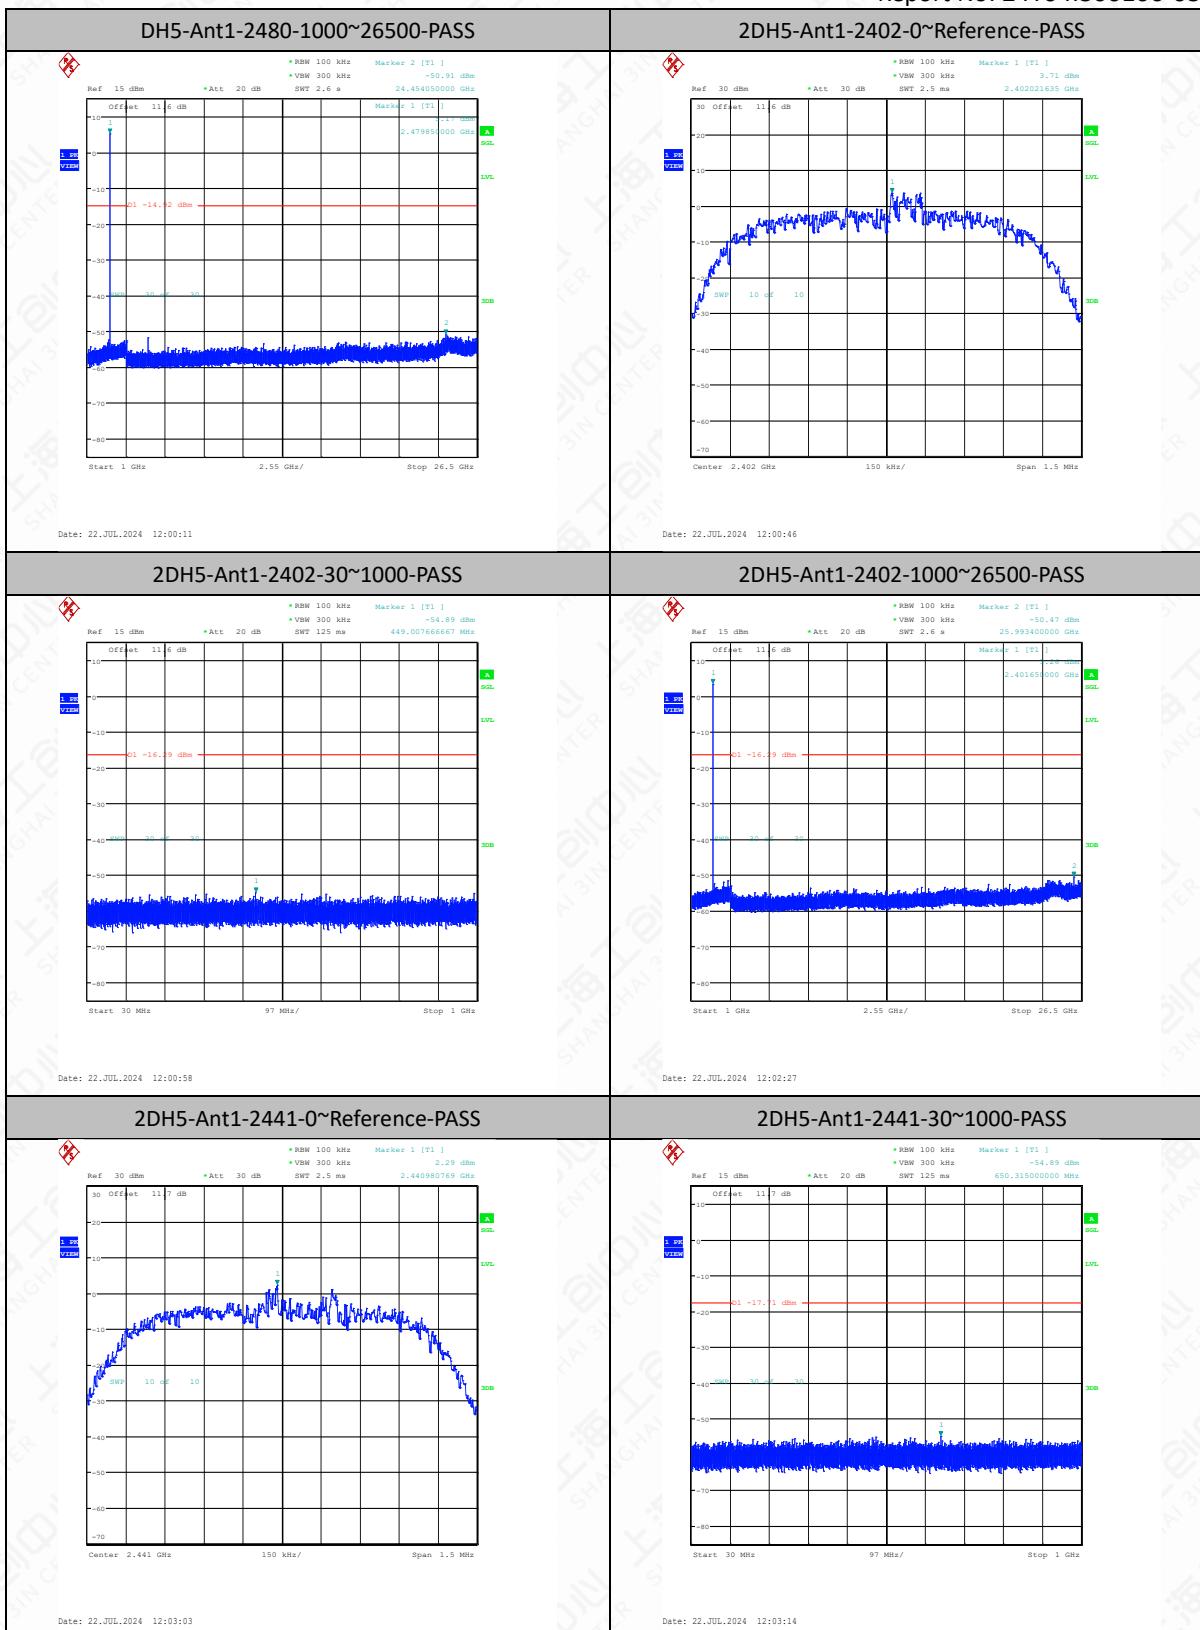


Report No: 24T04I300106-033

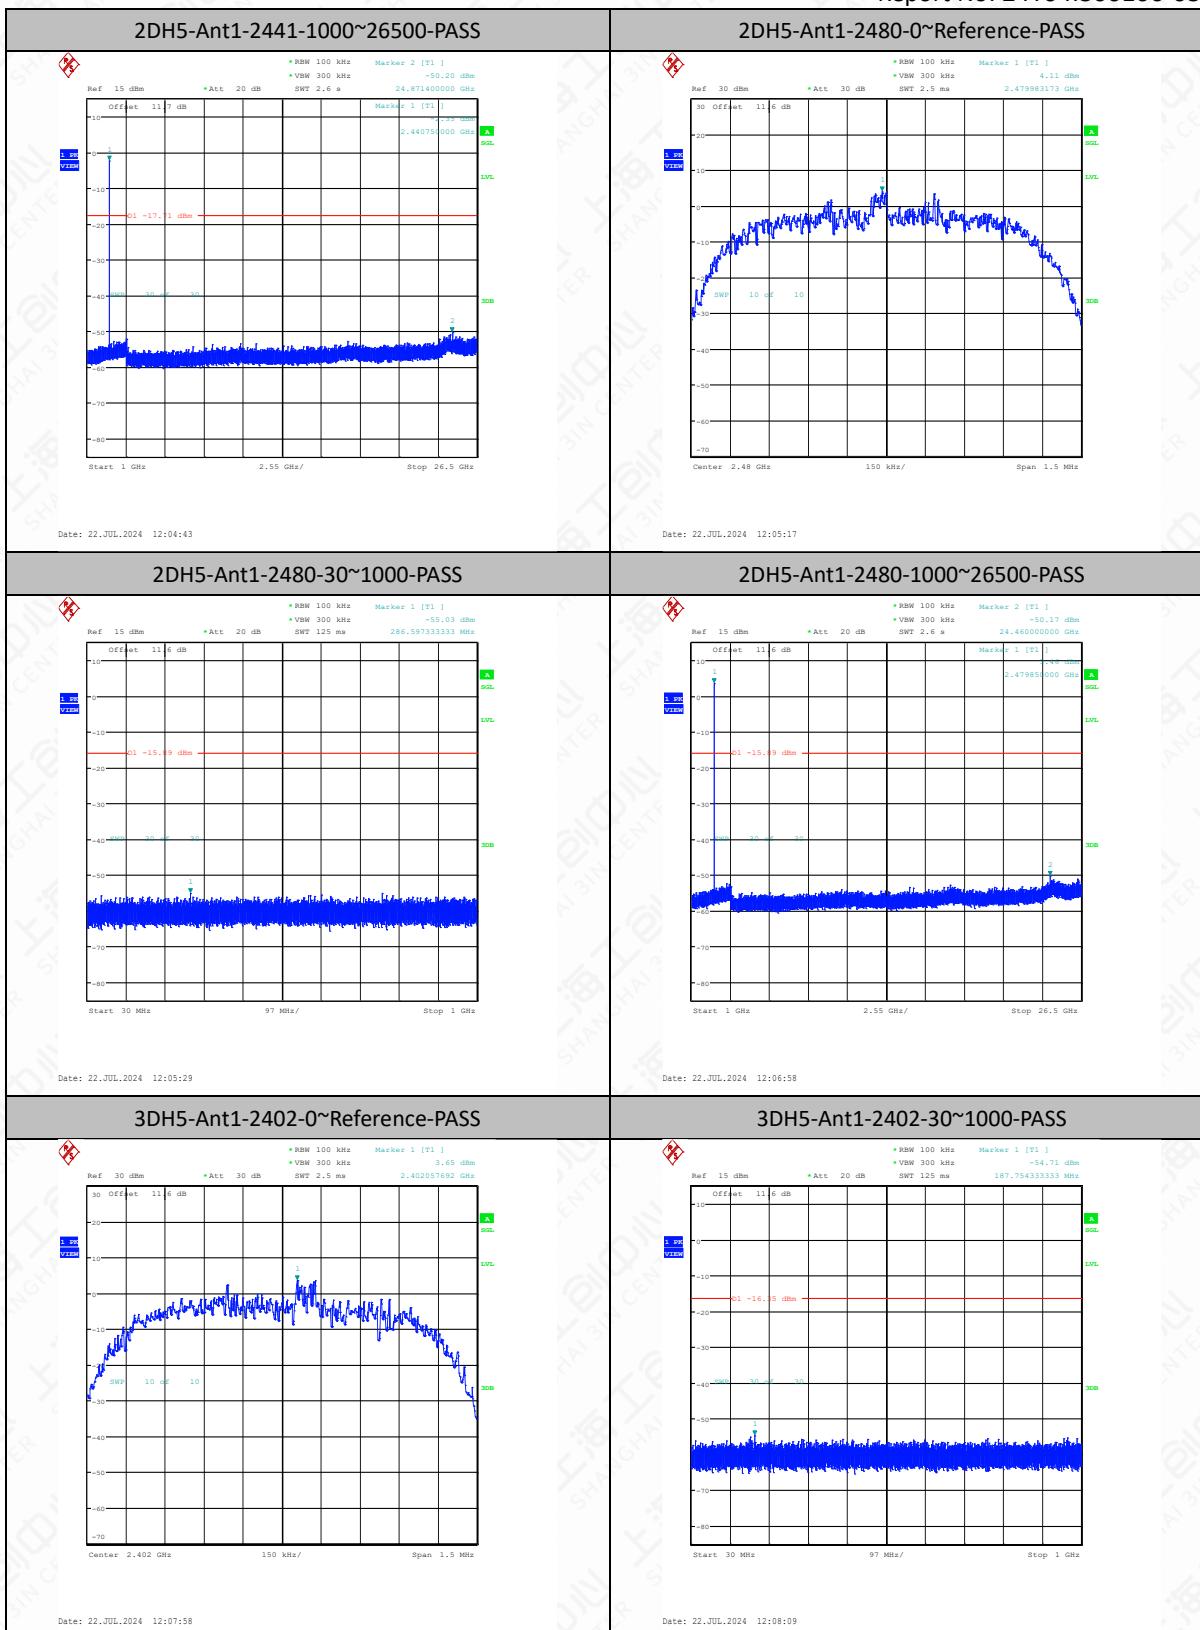

Report No: 24T04I300106-033

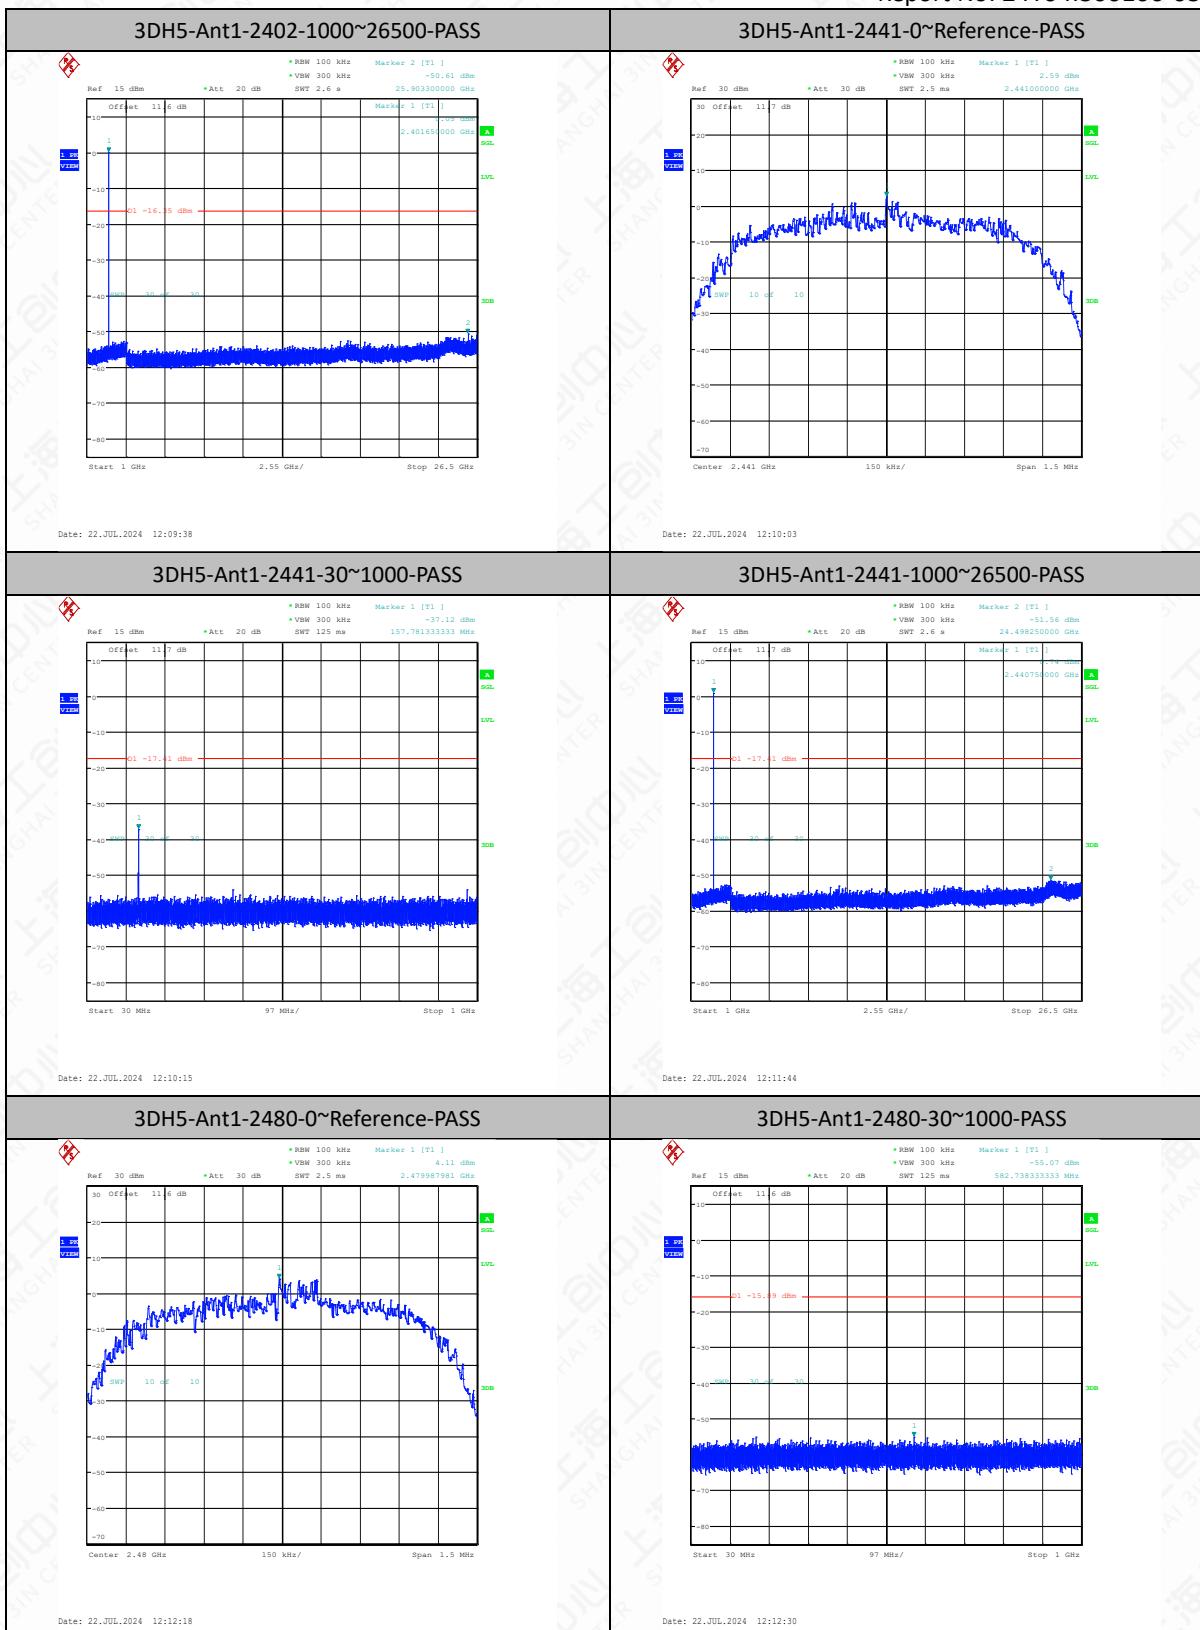

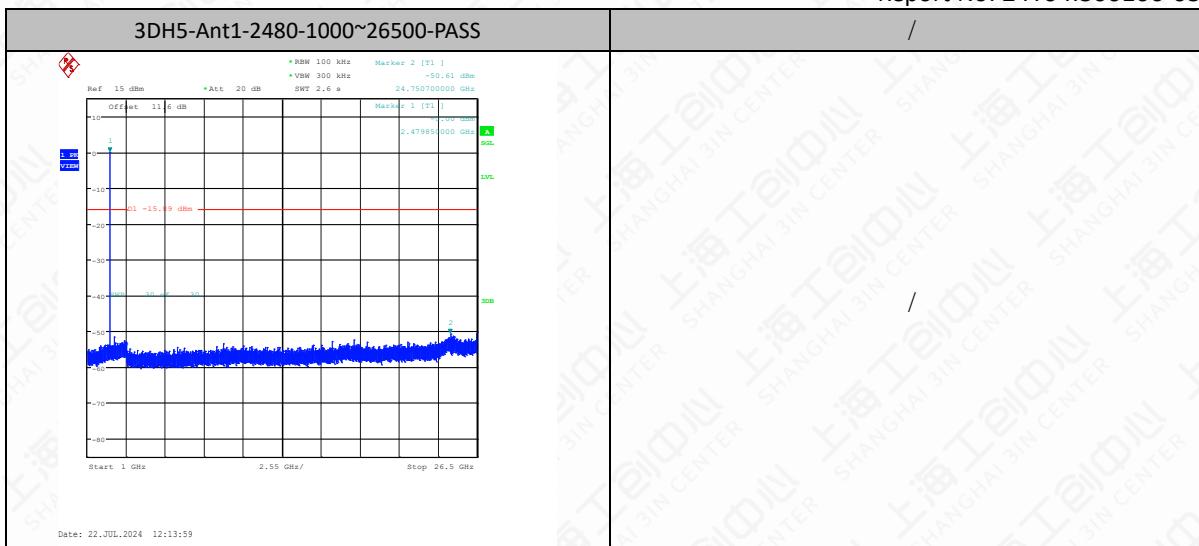

6.4 Radiated Emission

6.4.1 Measurement Limit

According to the FCC 15.205&15.209/RSS-Gen section 8.9&1.0

Limit in restricted band

Frequency of emission (MHz)	Field strength (mV/m)	Field strength (dBuV/m)
0.009~0.49	2400/F (kHz)	129-94
0.49~1.705	24000/F (kHz)	74-63
1.705~30	30	70
30~88	100	40
88~216	150	43.5
216~960	200	46
Above 960	500	54

6.4.2 Test Method

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a non-conducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by the EUT arrangement is 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. but it may be larger or smaller to accommodate various sized EUTs. For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also ANSI C63.10-2013 section 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Test Settings – Below 1GHz (Quasi-Peak Field Strength Measurements)

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW = 300 kHz.
- Detector = quasi-peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Trace was allowed to stabilize.

Test Settings – Above 1GHz (Peak Field Strength Measurements)

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 1MHz.

3. Set the VBW = 3MHz.
4. Detector = peak
5. Trace mode = max hold
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.


Test Settings – Above 1GHz (Average Field Strength Measurements)

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = 1MHz.
3. Set the VBW = 3MHz.
4. Detector = power average (RMS).
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span} \setminus \text{RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.


Frequency of emission	RBW/VBW	Sweep Time (s)
0.009~30	9KHz/30KHz	Auto
30~1000	100KHz/300KHz	5
1000~4000	1MHz/3MHz	15
4000~18000	1MHz/3MHz	40
18000~26500	1MHz/3MHz	20

6.4.3 Test Setup


Below 30MHz Test Setup

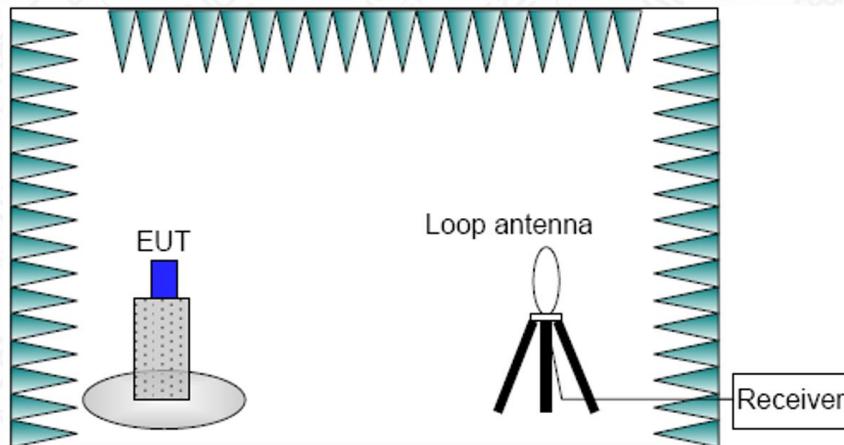

Below 1GHz Test Setup

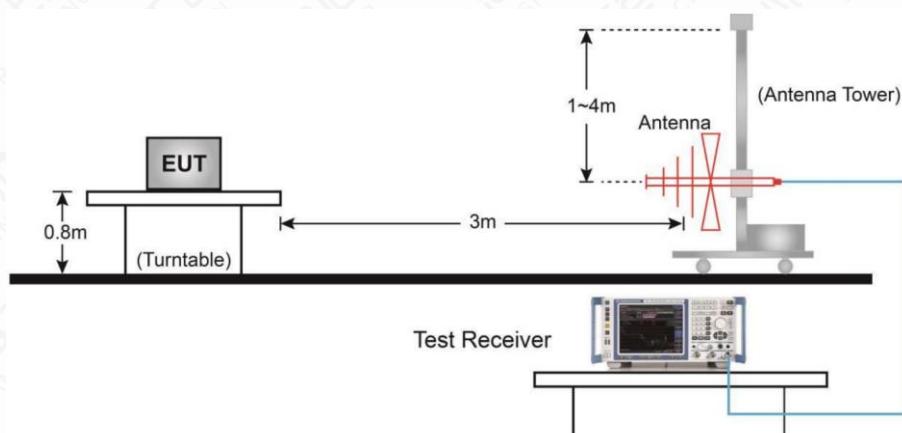

Above 1GHz Test Setup

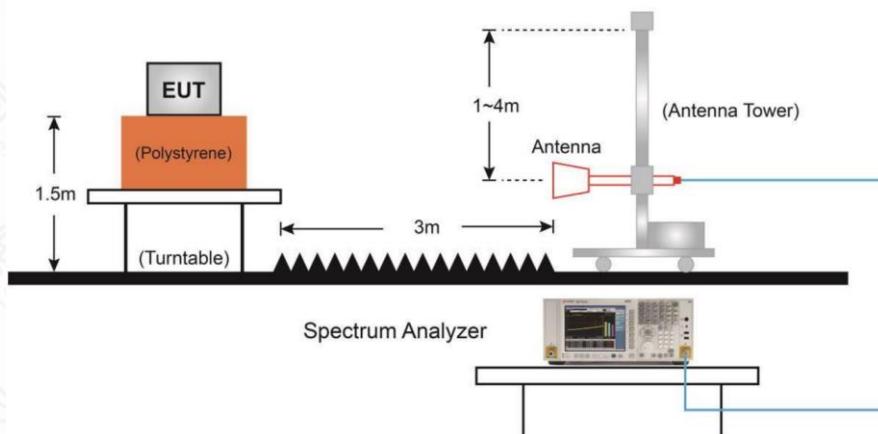


6.4.4 Measurement Results


A “reference path loss” is established and AR_{pi} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.


The measurement results are obtained as described below:


$$A_{Rpi} = \text{Cable loss} + \text{Antenna Factor-Preamplifier gain}$$


$$\text{Result} = P_{\text{Mea}} + A_{Rpi}$$

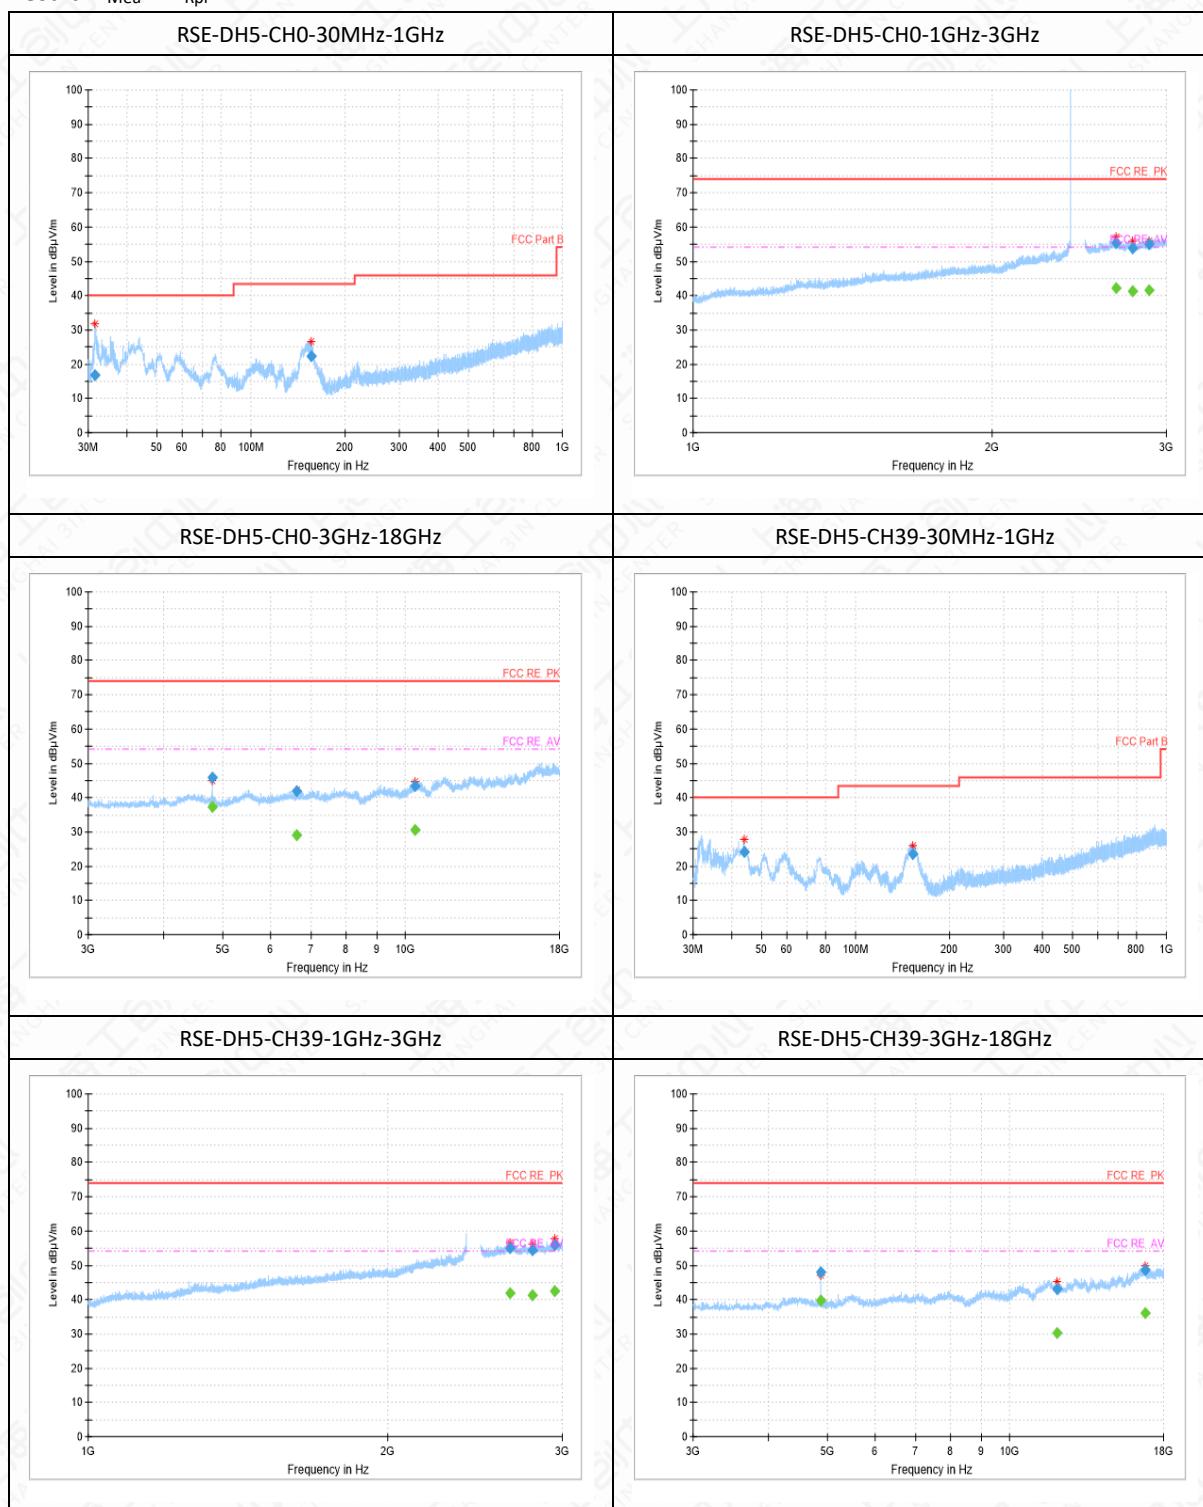

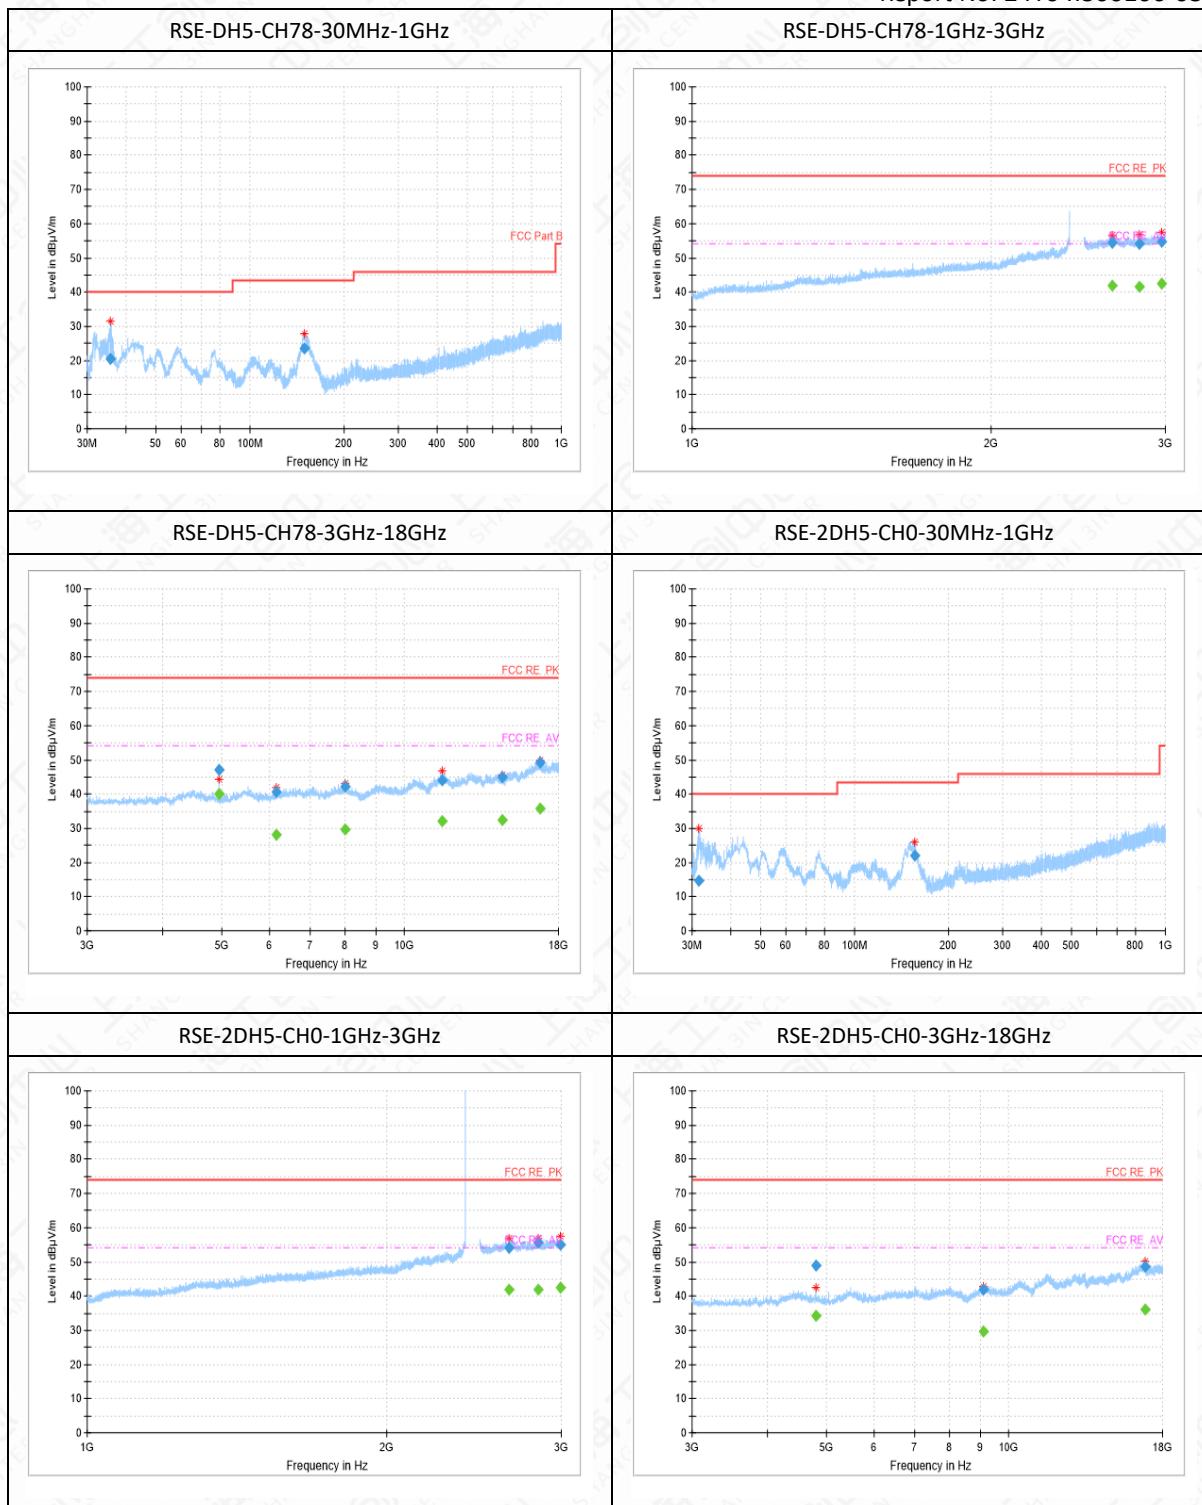


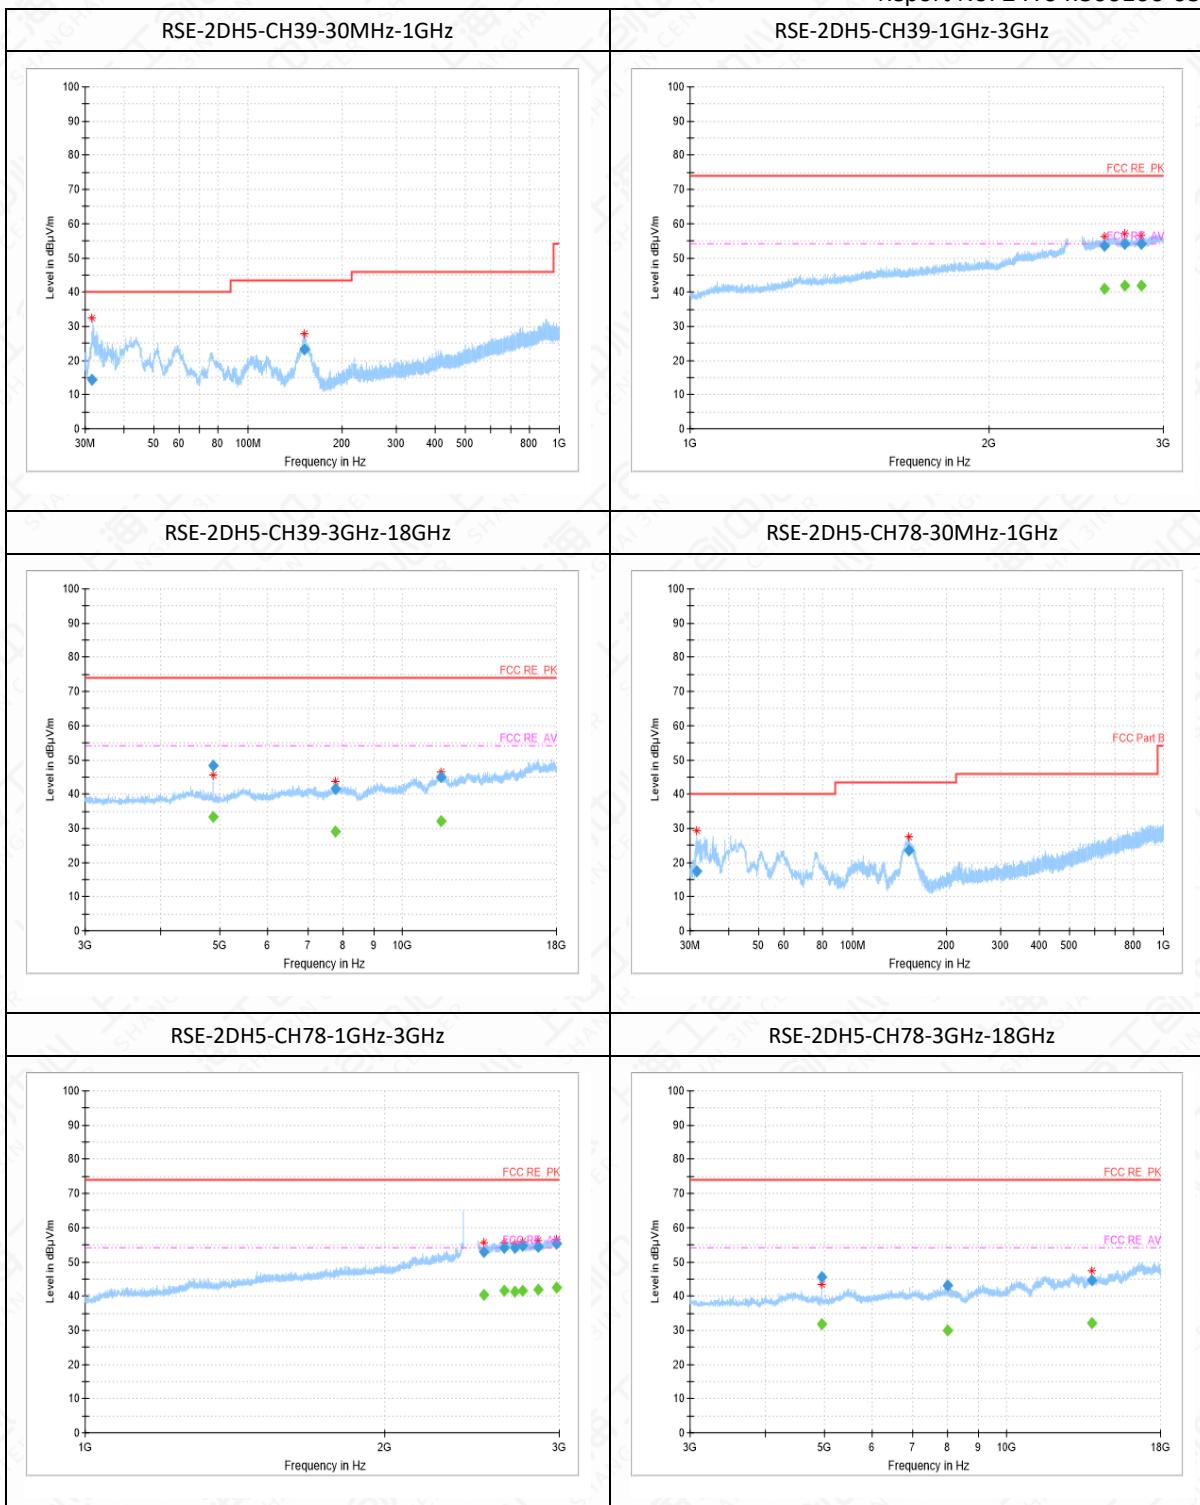


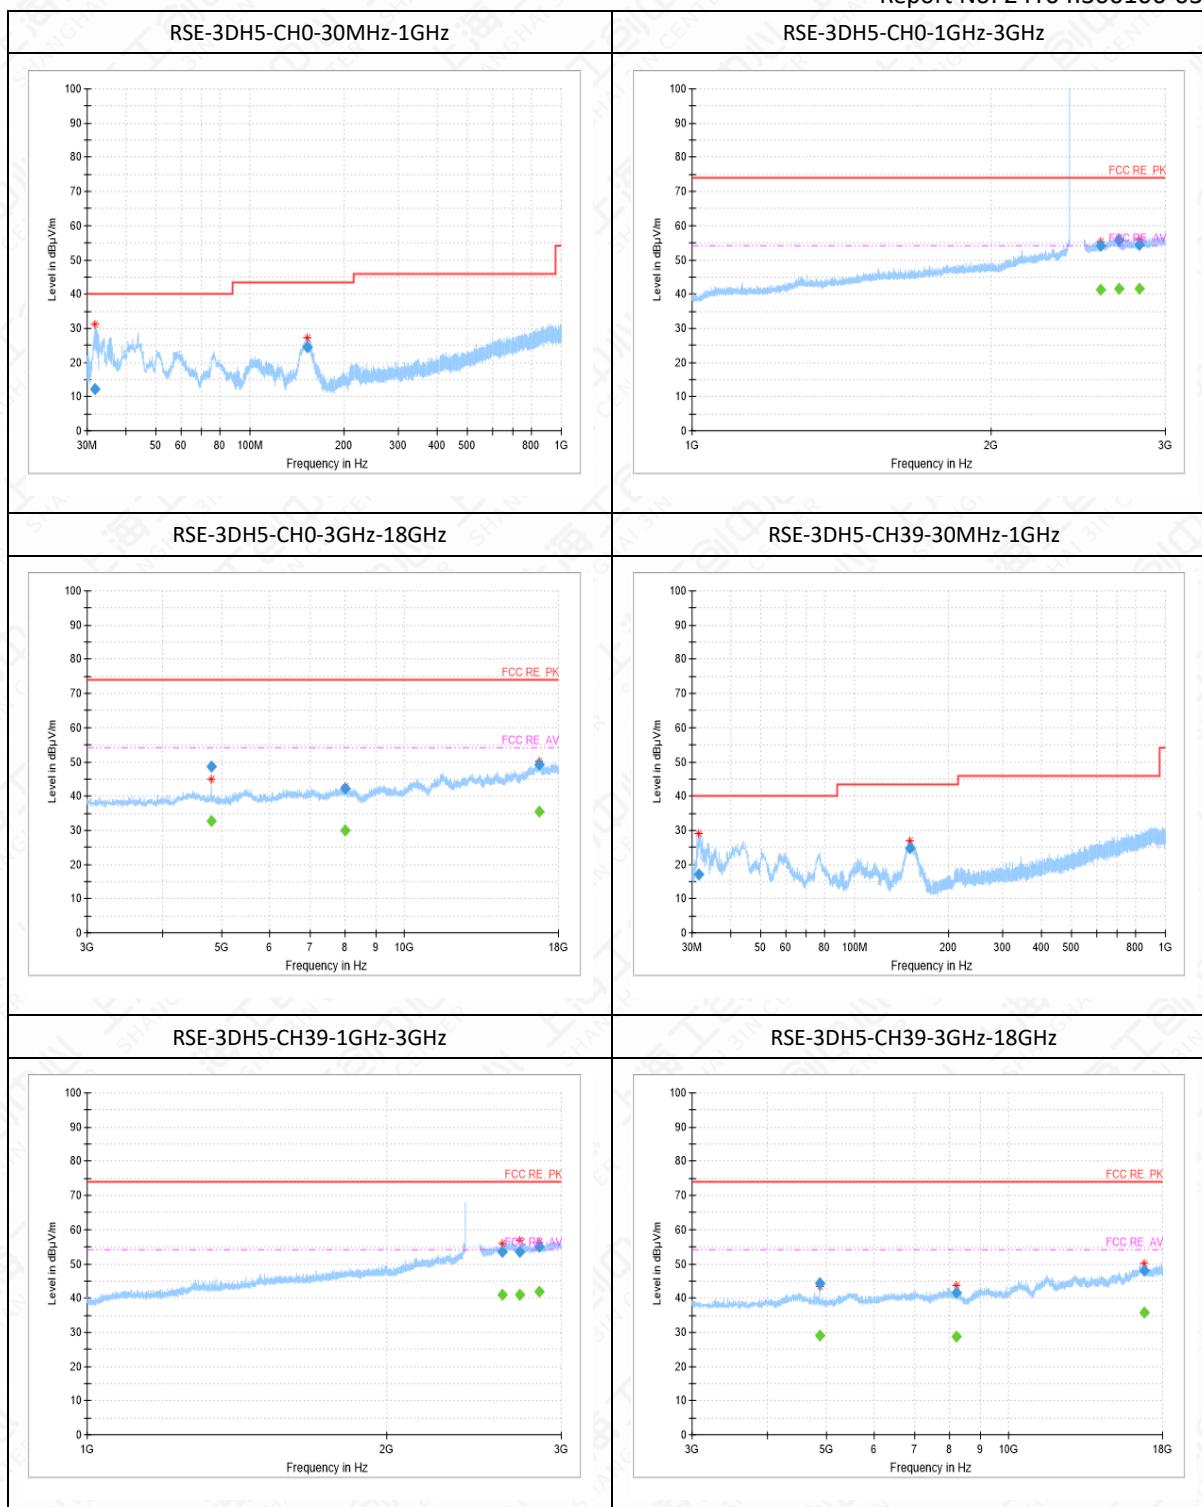


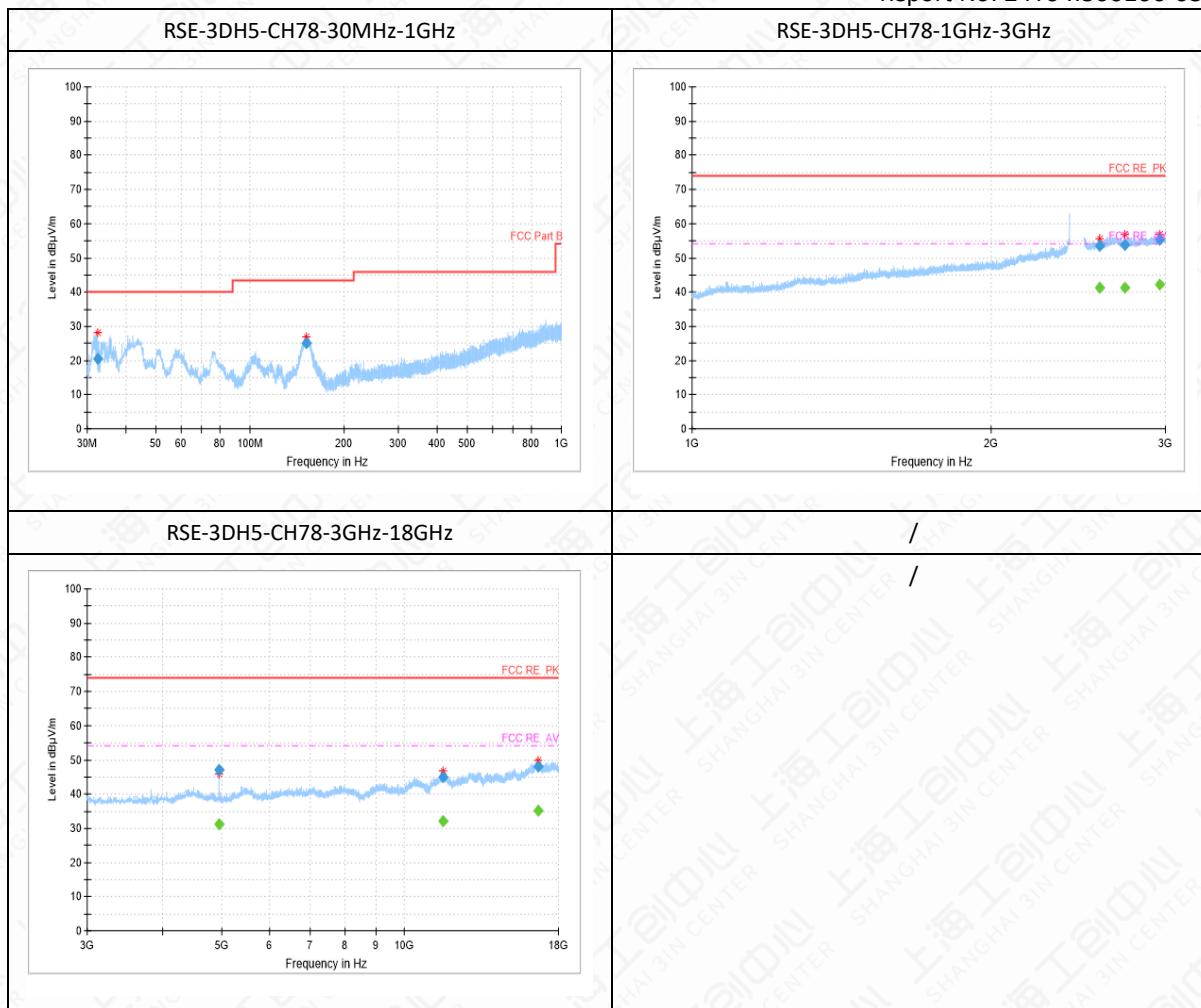


Bandedge

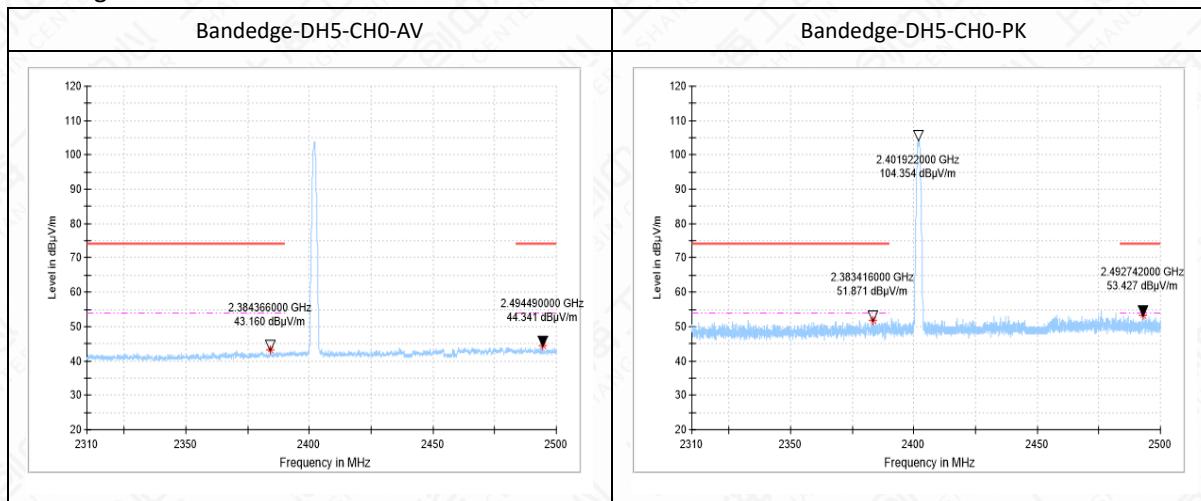

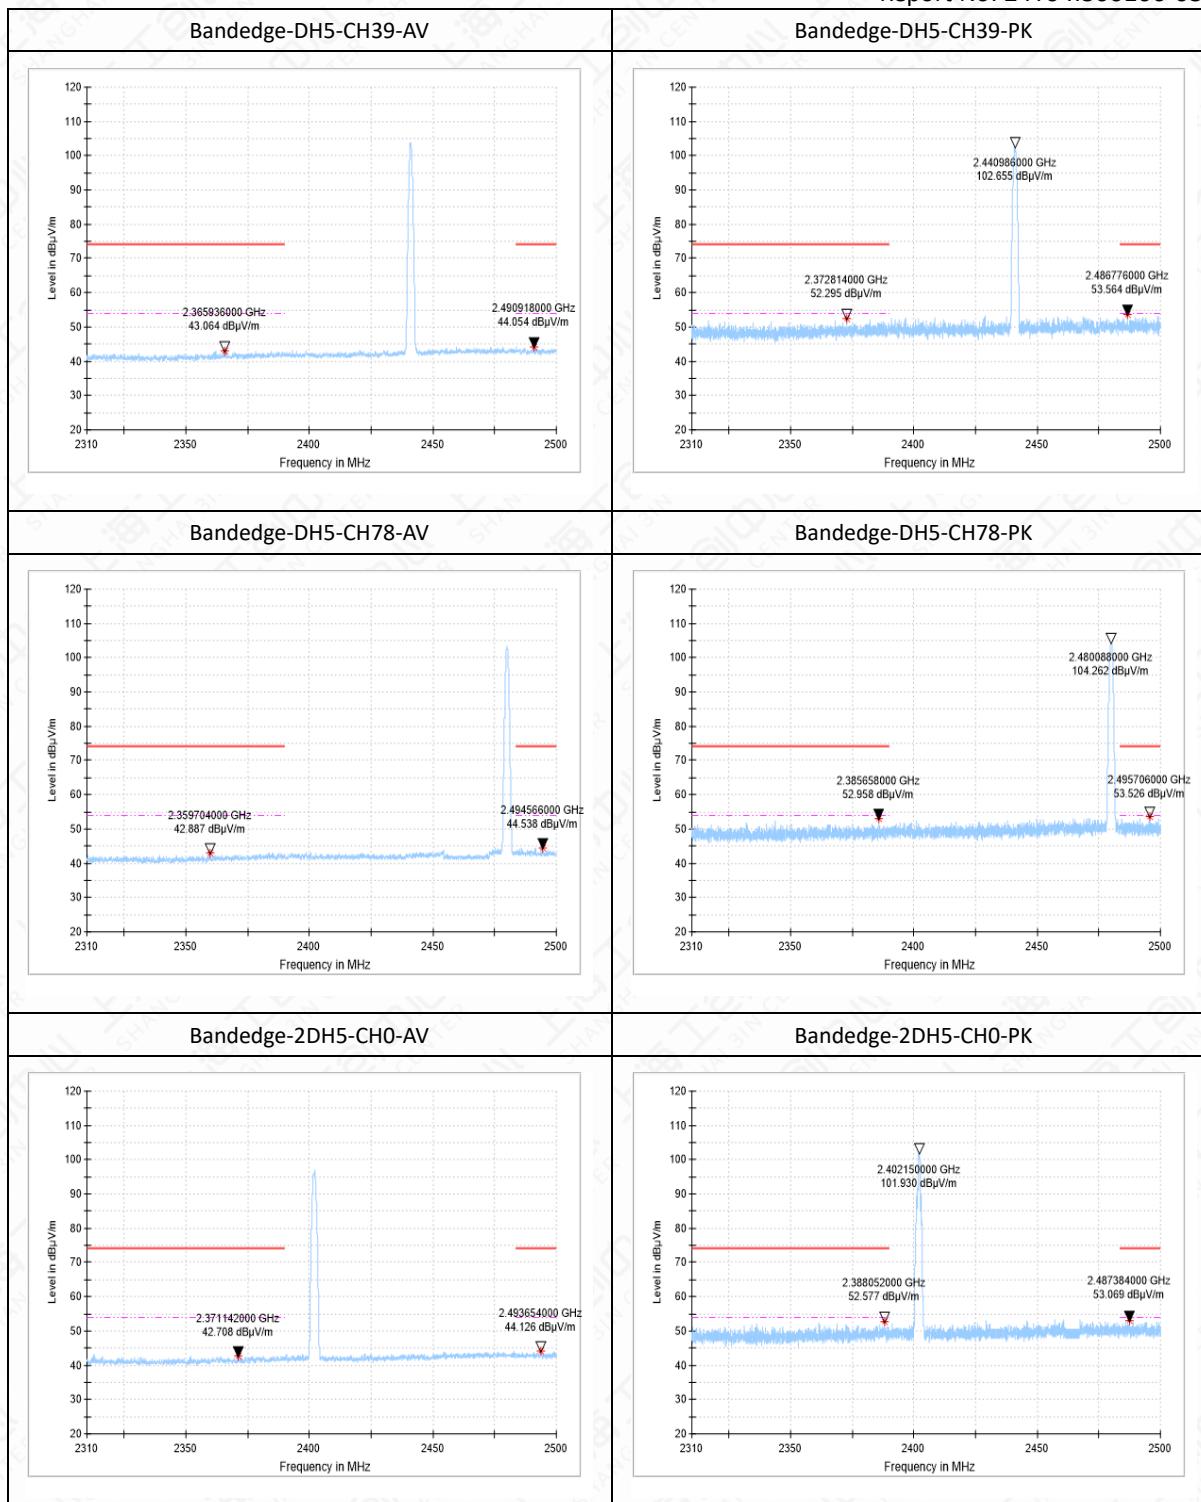

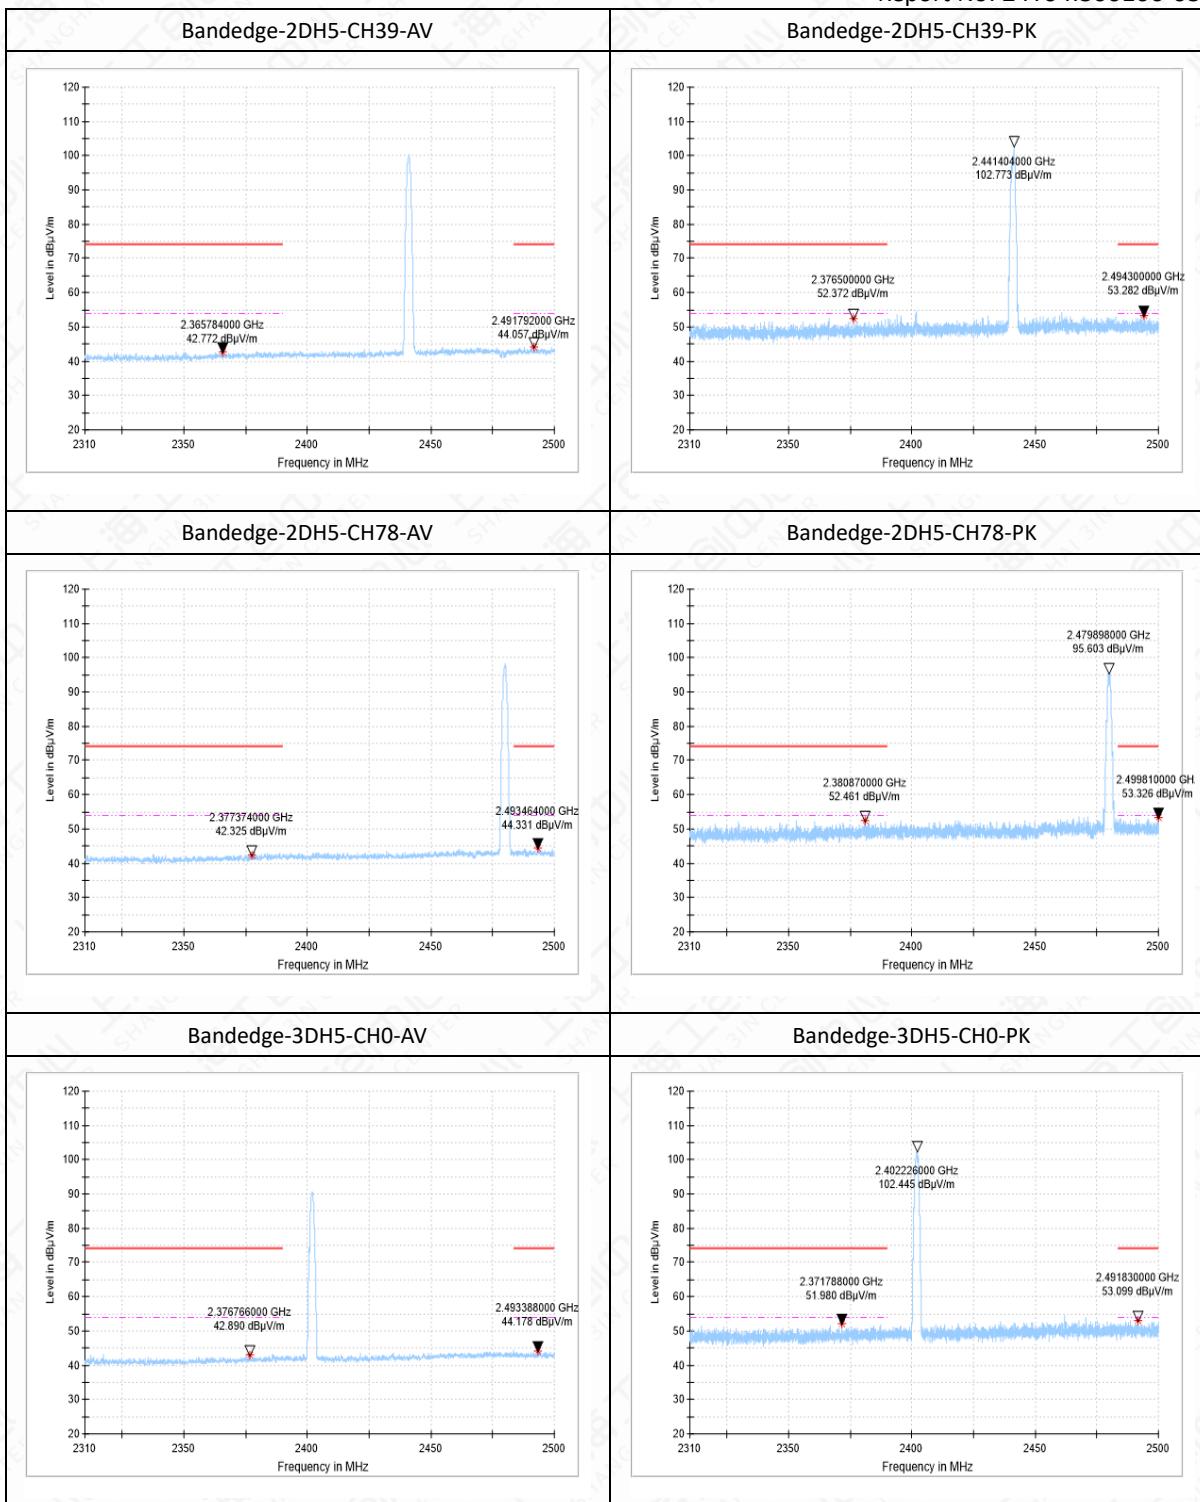

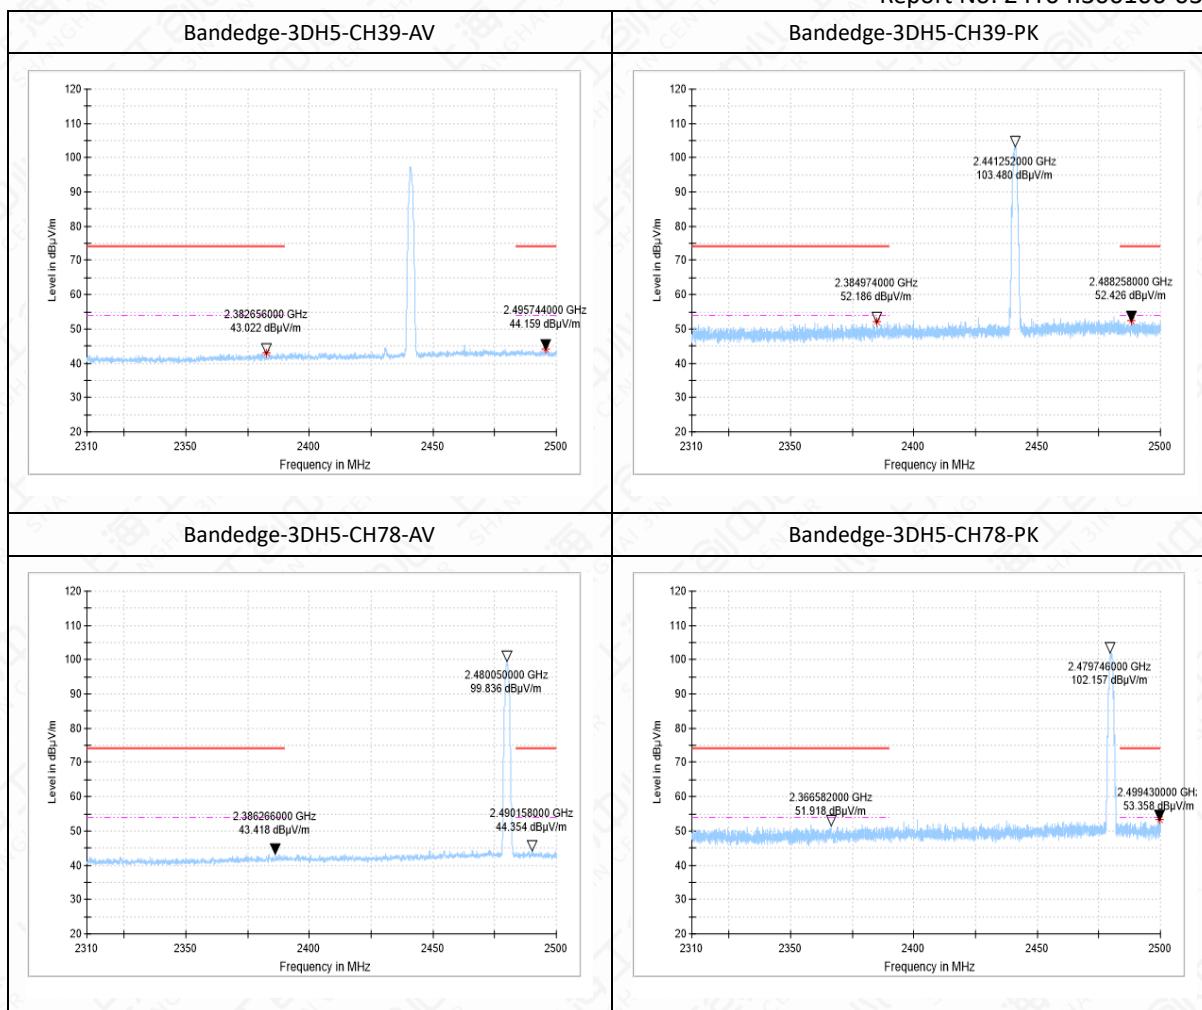

Note:

1. The out-of-limit signal in the picture is the main frequency signal.
2. Only data in worst mode is provided.
3. Sweep the whole frequency band through the range from 30MHz to the 10th harmonic of the carrier, the Emissions in the frequency band 18GHz-26.5GHz is more than 20dB below the limit are not report.
4. The test data below 30MHz is more than 20dB lower than the limit value, so it is not provided in the report.
5. Horizontal and vertical polarity is all have been tested, the result of them is synthesized in the above data diagram.

RSE-DH5-CH0-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
31.6	16.89	-16	32.89	23.11	40.00	V
156.0	22.42	-16	38.42	21.08	43.50	H

RSE-DH5-CH0-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2667.5	55.36	18	37.36	18.64	74.00	H
2771.6	53.81	17	36.81	20.19	74.00	H
2883.3	55.01	17	38.01	18.99	74.00	V

RSE-DH5-CH0-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2667.5	42.07	18	24.07	11.93	54.00	H
2771.6	41.25	17	24.25	12.75	54.00	H
2883.3	41.47	17	24.47	12.53	54.00	V

RSE-DH5-CH0-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
4803.8	45.9	-4	49.9	28.10	74.00	V
6621.6	42.05	-2	44.05	31.95	74.00	H
10388.4	43.47	1	42.47	30.53	74.00	H

RSE-DH5-CH0-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
4803.8	37.41	-4	41.41	16.59	54.00	V
6621.6	28.94	-2	30.94	25.06	54.00	H
10388.4	30.72	1	29.72	23.28	54.00	H

RSE-DH5-CH39-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
43.8	24.28	-12	36.28	15.72	40.00	V
153.3	23.49	-16	39.49	20.01	43.50	H

RSE-DH5-CH39-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2655.9	54.9	18	36.9	19.10	74.00	V
2798.6	54.46	17	37.46	19.54	74.00	V
2943.6	56.06	18	38.06	17.94	74.00	V

RSE-DH5-CH39-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2655.9	41.9	18	23.9	12.10	54.00	V
2798.6	41.3	17	24.3	12.70	54.00	V
2943.6	42.39	18	24.39	11.61	54.00	V

RSE-DH5-CH39-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
4881.6	47.96	-3	50.96	26.04	74.00	H
11984.0	43.18	3	40.18	30.82	74.00	H
16786.9	48.66	11	37.66	25.34	74.00	H

RSE-DH5-CH39-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
4881.6	39.73	-3	42.73	14.27	54.00	H
11984.0	30.37	3	27.37	23.63	54.00	H
16786.9	35.95	11	24.95	18.05	54.00	H

RSE-DH5-CH78-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
35.7	20.51	-14	34.51	19.49	40.00	V
149.7	23.43	-17	40.43	20.07	43.50	H

RSE-DH5-CH78-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2653.8	54.33	18	36.33	19.67	74.00	V
2820.8	54.26	17	37.26	19.74	74.00	H

Report No: 24T04I300106-033

2975.3	54.72	18	36.72	19.28	74.00	V
--------	-------	----	-------	-------	-------	---

RSE-DH5-CH78-1GHz-3GHz

Frequency (MHz)	Average(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
2653.8	41.89	18	23.89	12.11	54.00	V
2820.8	41.48	17	24.48	12.52	54.00	H
2975.3	42.36	18	24.36	11.64	54.00	V

RSE-DH5-CH78-3GHz-18GHz

Frequency (MHz)	MaxPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
4959.9	46.99	-3	49.99	27.01	74.00	H
6164.5	40.7	-3	43.7	33.30	74.00	H
8001.6	42.16	-1	43.16	31.84	74.00	V
11569.2	44.14	4	40.14	29.86	74.00	H
14509.8	44.93	6	38.93	29.07	74.00	H
16754.5	49.12	11	38.12	24.88	74.00	V

RSE-DH5-CH78-3GHz-18GHz

Frequency (MHz)	Average(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
4959.9	39.99	-3	42.99	14.01	54.00	H
6164.5	28.02	-3	31.02	25.98	54.00	H
8001.6	29.58	-1	30.58	24.42	54.00	V
11569.2	32.07	4	28.07	21.93	54.00	H
14509.8	32.34	6	26.34	21.66	54.00	H
16754.5	35.81	11	24.81	18.19	54.00	V

RSE-2DH5-CH0-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dB μ V/4)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
31.6	14.61	-16	30.61	25.39	40.00	V
155.6	21.98	-16	37.98	21.52	43.50	H

RSE-2DH5-CH0-1GHz-3GHz

Frequency (MHz)	MaxPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
--------------------	-----------------------	-----------	------------------------	------------	---------------------	----------

Report No: 24T04I300106-033

2655.3	54.21	18	36.21	19.79	74.00	H
2842.2	55.54	18	37.54	18.46	74.00	H
2991.1	54.96	18	36.96	19.04	74.00	V

RSE-2DH5-CH0-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2655.3	41.9	18	23.9	12.10	54.00	H
2842.2	41.94	18	23.94	12.06	54.00	H
2991.1	42.42	18	24.42	11.58	54.00	V

RSE-2DH5-CH0-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
4803.8	48.85	-4	52.85	25.15	74.00	H
9092.9	41.92	-1	42.92	32.08	74.00	H
16814.5	48.7	11	37.7	25.30	74.00	H

RSE-2DH5-CH0-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
4803.8	34.16	-4	38.16	19.84	54.00	H
9092.9	29.64	-1	30.64	24.36	54.00	H
16814.5	36.13	11	25.13	17.87	54.00	H

RSE-2DH5-CH39-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
31.6	14.4	-16	30.4	25.60	40.00	V
152.0	23.16	-16	39.16	20.34	43.50	H

RSE-2DH5-CH39-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2618.2	53.51	17	36.51	20.49	74.00	V
2741.0	54.06	17	37.06	19.94	74.00	H
2850.6	54.03	18	36.03	19.97	74.00	V

RSE-2DH5-CH39-1GHz-3GHz

Frequency	Average(dBμV/m)	ARpl (dB)	PMea	Margin(dB)	Limit(dBμV/m)	Polarity

Report No: 24T04I300106-033

(MHz)			(dB μ V/m)			
2618.2	41.12	17	24.12	12.88	54.00	V
2741.0	41.82	17	24.82	12.18	54.00	H
2850.6	41.86	18	23.86	12.14	54.00	V

RSE-2DH5-CH39-3GHz-18GHz

Frequency (MHz)	MaxPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
4881.6	48.44	-3	51.44	25.56	74.00	H
7776.5	41.49	-2	43.49	32.51	74.00	H
11601.1	45.05	4	41.05	28.95	74.00	H

RSE-2DH5-CH39-3GHz-18GHz

Frequency (MHz)	Average(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
4881.6	33.2	-3	36.2	20.80	54.00	H
7776.5	29.2	-2	31.2	24.80	54.00	H
11601.1	32.2	4	28.2	21.80	54.00	H

RSE-2DH5-CH78-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
31.6	17.53	-16	33.53	22.47	40.00	V
151.7	23.42	-16	39.42	20.08	43.50	H

RSE-2DH5-CH78-1GHz-3GHz

Frequency (MHz)	MaxPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
2516.8	52.77	16	36.77	21.23	74.00	V
2637.3	54.28	17	37.28	19.72	74.00	V
2706.6	54.18	17	37.18	19.82	74.00	H
2751.8	54.89	17	37.89	19.11	74.00	H
2857.0	54.33	18	36.33	19.67	74.00	H
2982.7	55.31	18	37.31	18.69	74.00	V

RSE-2DH5-CH78-1GHz-3GHz

Frequency (MHz)	Average(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity

Report No: 24T04I300106-033

2516.8	40.4	16	24.4	13.60	54.00	V
2637.3	41.72	17	24.72	12.28	54.00	V
2706.6	41.15	17	24.15	12.85	54.00	H
2751.8	41.73	17	24.73	12.27	54.00	H
2857.0	41.8	18	23.8	12.20	54.00	H
2982.7	42.42	18	24.42	11.58	54.00	V

RSE-2DH5-CH78-3GHz-18GHz

Frequency (MHz)	MaxPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
4959.9	45.53	-3	48.53	28.47	74.00	H
8001.5	43.14	-1	44.14	30.86	74.00	H
13859.0	44.56	4	40.56	29.44	74.00	H

RSE-2DH5-CH78-3GHz-18GHz

Frequency (MHz)	Average(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
4959.9	31.85	-3	34.85	22.15	54.00	H
8001.5	30.07	-1	31.07	23.93	54.00	H
13859.0	32.09	4	28.09	21.91	54.00	H

RSE-3DH5-CH0-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
31.7	12.3	-15	27.3	27.70	40.00	V
153.1	24.59	-16	40.59	18.91	43.50	H

RSE-3DH5-CH0-1GHz-3GHz

Frequency (MHz)	MaxPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
2581.3	54.15	17	37.15	19.85	74.00	H
2690.6	55.54	17	38.54	18.46	74.00	V
2823.3	54.58	17	37.58	19.42	74.00	H

RSE-3DH5-CH0-1GHz-3GHz

Frequency (MHz)	Average(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
2581.3	41.36	17	24.36	12.64	54.00	H

Report No: 24T04I300106-033

2690.6	41.6	17	24.6	12.40	54.00	V
2823.3	41.45	17	24.45	12.55	54.00	H

RSE-3DH5-CH0-3GHz-18GHz

Frequency (MHz)	MaxPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
4804.2	48.73	-4	52.73	25.27	74.00	H
8011.4	42.34	-1	43.34	31.66	74.00	H
16710.5	49.16	10	39.16	24.84	74.00	H

RSE-3DH5-CH0-3GHz-18GHz

Frequency (MHz)	Average(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
4804.2	32.84	-4	36.84	21.16	54.00	H
8011.4	29.96	-1	30.96	24.04	54.00	H
16710.5	35.46	10	25.46	18.54	54.00	H

RSE-3DH5-CH39-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
31.6	17.05	-16	33.05	22.95	40.00	V
150.9	24.76	-16	40.76	18.74	43.50	H

RSE-3DH5-CH39-1GHz-3GHz

Frequency (MHz)	MaxPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
2616.5	53.65	17	36.65	20.35	74.00	H
2724.7	53.66	17	36.66	20.34	74.00	H
2851.2	54.92	18	36.92	19.08	74.00	V

RSE-3DH5-CH39-1GHz-3GHz

Frequency (MHz)	Average(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity
2616.5	41.1	17	24.1	12.90	54.00	H
2724.7	40.98	17	23.98	13.02	54.00	H
2851.2	41.84	18	23.84	12.16	54.00	V

RSE-3DH5-CH39-3GHz-18GHz

Frequency (MHz)	MaxPeak(dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Margin(dB)	Limit(dB μ V/m)	Polarity

Report No: 24T04I300106-033

4881.6	44.4	-3	47.4	29.60	74.00	V
8211.6	41.5	-1	42.5	32.50	74.00	H
16788.8	47.91	11	36.91	26.09	74.00	H

RSE-3DH5-CH39-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
4881.6	29.16	-3	32.16	24.84	54.00	V
8211.6	28.79	-1	29.79	25.21	54.00	H
16788.8	35.66	11	24.66	18.34	54.00	H

RSE-3DH5-CH78-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
32.4	20.62	-15	35.62	19.38	40.00	V
151.2	25.05	-16	41.05	18.45	43.50	H

RSE-3DH5-CH78-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2573.1	53.5	17	36.5	20.50	74.00	V
2729.5	53.84	17	36.84	20.16	74.00	H
2958.0	55.4	18	37.4	18.60	74.00	H

RSE-3DH5-CH78-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2573.1	41.42	17	24.42	12.58	54.00	V
2729.5	41.16	17	24.16	12.84	54.00	H
2958.0	42.31	18	24.31	11.69	54.00	H

RSE-3DH5-CH78-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
4960.4	47.01	-3	50.01	26.99	74.00	H
11607.2	44.81	4	40.81	29.19	74.00	V
16682.9	48.05	10	38.05	25.95	74.00	H

RSE-3DH5-CH78-3GHz-18GHz

Frequency	Average(dBμV/m)	ARpl (dB)	PMea	Margin(dB)	Limit(dBμV/m)	Polarity

Report No: 24T04I300106-033

(MHz)			(dB μ V/m)			
4960.4	31.17	-3	34.17	22.83	54.00	H
11607.2	32.2	4	28.2	21.80	54.00	V
16682.9	35.18	10	25.18	18.82	54.00	H

6.5 Time Of Occupancy (Dwell Time)

6.5.1 Measurement Limit

Standard	Limit(ms)
FCC 47 Part 15.247 (a) (1) (iii)	<400
RSS-247 5.1	<400

6.5.2 Test procedures

The measurement is according to ANSI C63.10 clause 7.8.4


1. Connect the EUT through cable and divide with spectrum analyzer.
2. Enable the EUT transmit maximum power.
3. Set the spectrum analyzer as step 4 to step 8.
4. Span: Zero span, centered on a hopping channel.
5. RBW shall be \leq channel spacing and where possible RBW should be set $>> 1 / T$, where T is the expected dwell time per channel.
6. Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
7. Detector function: Peak.
8. Trace: Clear-write, single sweep
9. Place markers at the start of the first transmission on the channel and at the end of the last transmission. The dwell time per hop is the time between these two markers.

To determine the number of hops on a channel in the regulatory observation period repeat the measurement using a longer sweep time. When the device uses a single hopping sequence the period of measurement should be sufficient to capture at least 2 hops. When the device uses a dynamic hopping sequence, or the sequence varies, the period of measurement may need to capture multiple hops to better determine the average time of occupancy. Count the number of hops on the channel across the sweep time. The average number of hops on the same channel within the regulatory observation period is calculated from the number of hops on the channel divided by the spectrum analyzer sweep time multiplied by the regulatory observation period. For example, if three hops are counted with an analyzer sweep time of 500 ms and the regulatory observation period is 10 s, then the number of hops in that ten seconds is $3 / 0.5 \times 10$, or 60 hops.

The average time of occupancy is calculated by multiplying the dwell time per hop by the number of hops in the observation period. Where the device shares the same hopping algorithms (dwell time, channel selection) across multiple data rates or modulation schemes then the time of occupancy need only be measured for one of those modulation schemes or data rates. If the dwell time value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in dwell time.

Spectral plots of the channel occupancy shall be included in the report.

6.5.3 Test Setup

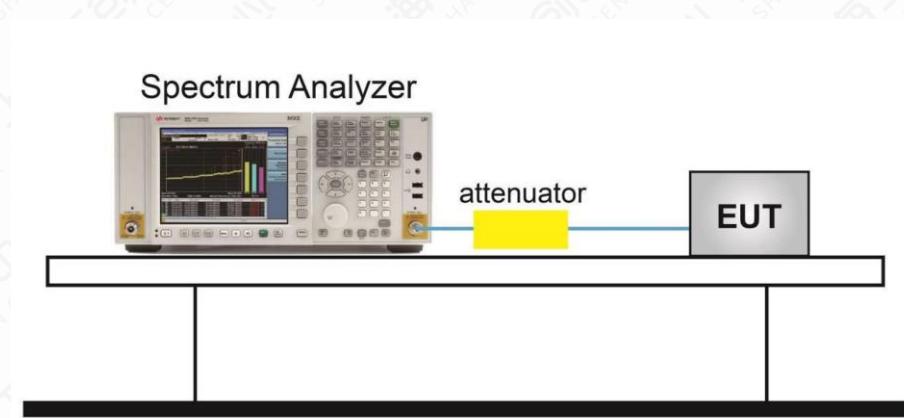



Note: The attenuator shown in the figure is the attenuation of the entire test system.

6.5.4 Measurement Results

TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH5	Ant1	Hop	2.881	97	0.279	≤0.4	PASS
2DH5	Ant1	Hop	2.884	106	0.306	≤0.4	PASS
3DH5	Ant1	Hop	2.884	119	0.343	≤0.4	PASS

Test Graphs

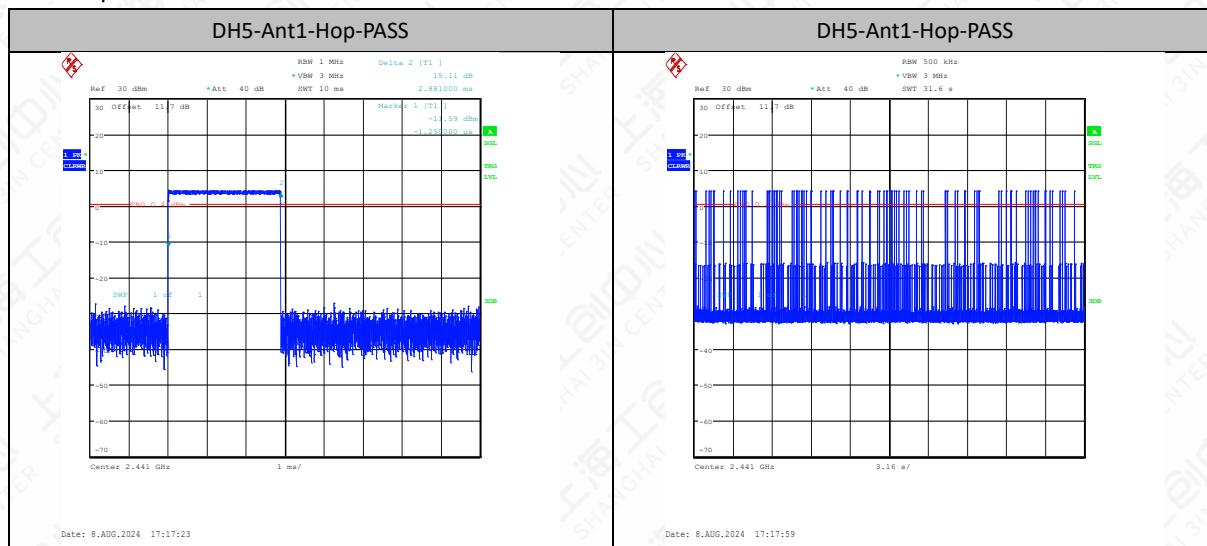

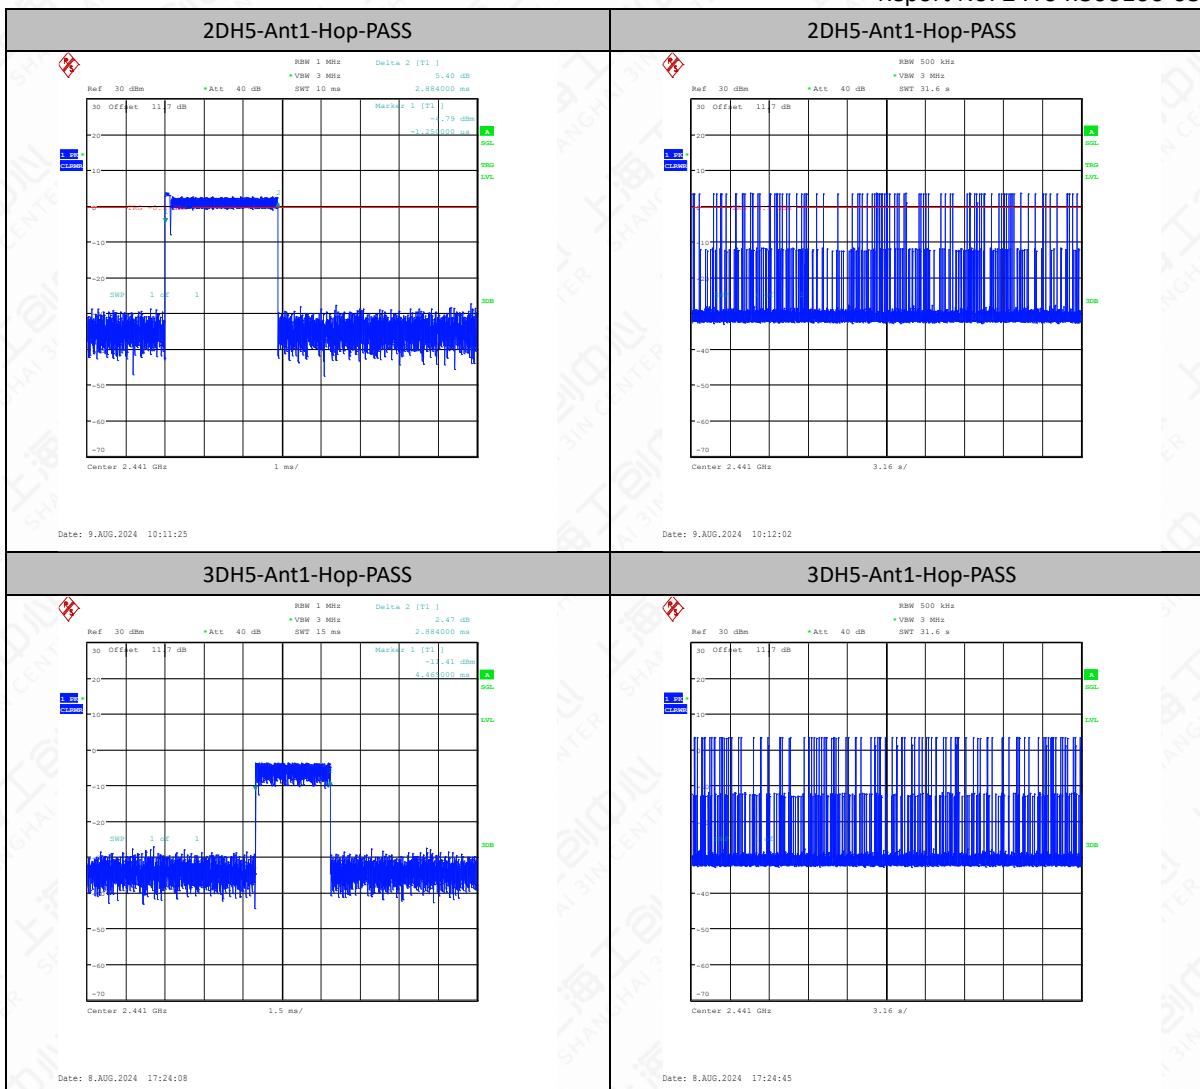

Note: All modes have been tested and only the worst mode is recorded in the report.

6.6 20dB Bandwidth

6.6.1 Measurement Limit


Standard	Limit
FCC 47 Part 15.247(a)	N/A
RSS-247 5.1	N/A

6.6.2 Test procedures

The measurement is according to ANSI C63.10 clause 7.8.7

1. Connect the EUT through cable and divide with CMW270 and spectrum analyzer.
2. Enable the EUT transmit maximum power.
3. Set the spectrum analyzer as step 4 to step 7.
4. Span: two or five times of OBW
5. RBW= 1% to 5% of the OBW; VBW is approximately three times of RBW; Max Hold.
6. Select the max peak, and N DB DOWN=20dB.
7. Record the results.

6.6.3 Test Setup

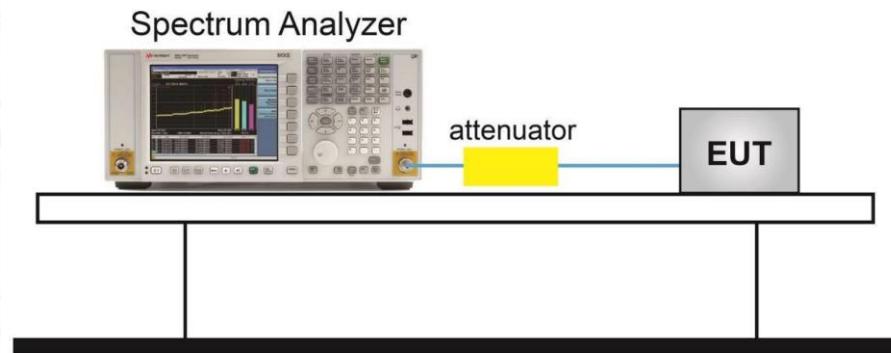



Note: The attenuator shown in the figure is the attenuation of the entire test system.

6.6.4 Measurement Result

TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.87	2401.54	2402.41	---	---
DH5	Ant1	2441	0.86	2440.55	2441.41	---	---
DH5	Ant1	2480	0.86	2479.55	2480.41	---	---
2DH5	Ant1	2402	1.26	2401.37	2402.63	---	---
2DH5	Ant1	2441	1.28	2440.36	2441.64	---	---
2DH5	Ant1	2480	1.26	2479.37	2480.63	---	---
3DH5	Ant1	2402	1.28	2401.36	2402.63	---	---
3DH5	Ant1	2441	1.29	2440.35	2441.64	---	---
3DH5	Ant1	2480	1.28	2479.36	2480.63	---	---

Test Graphs

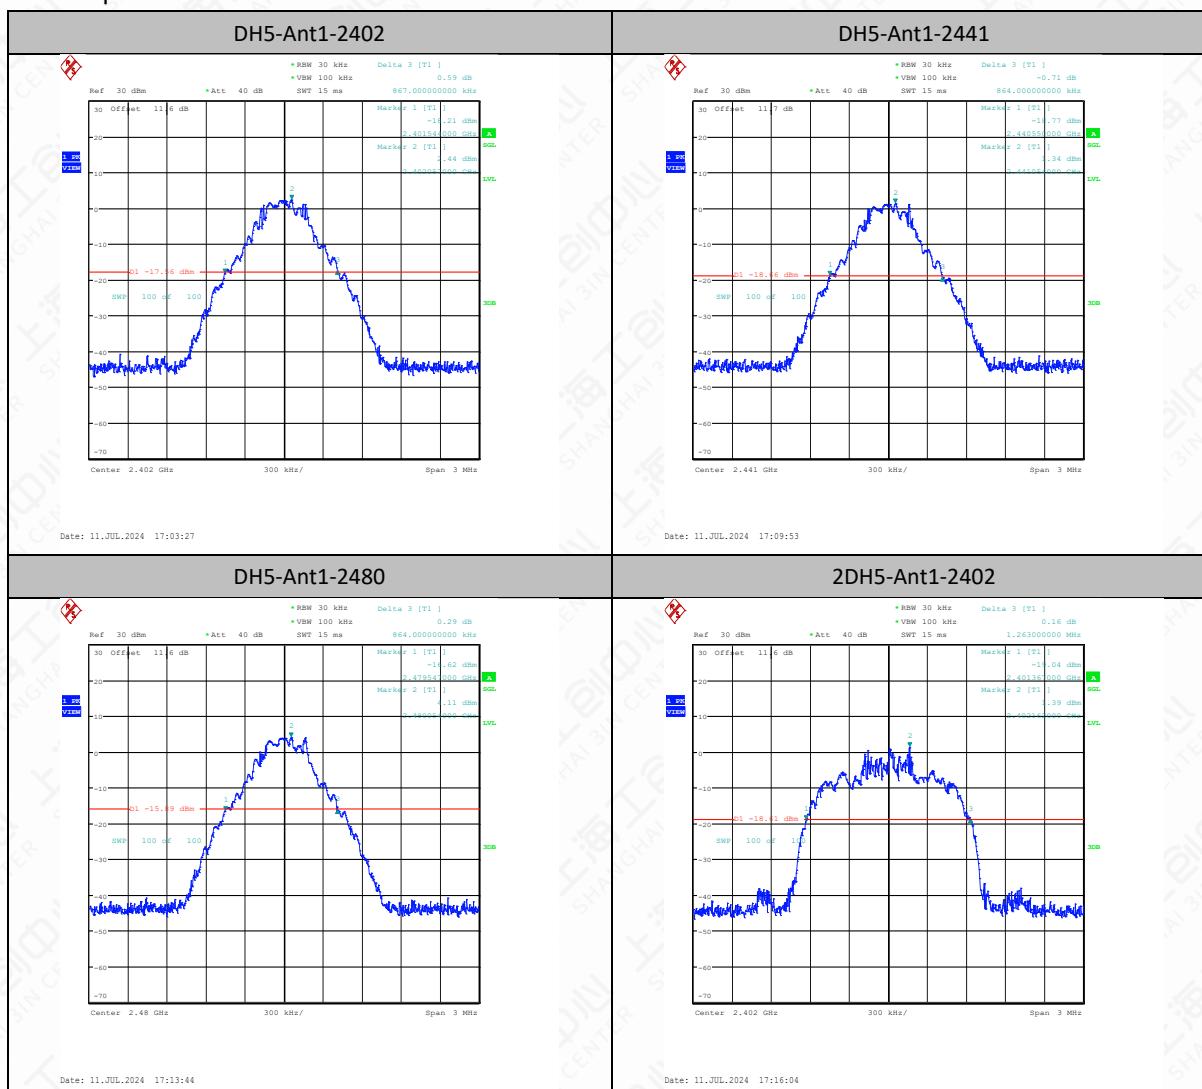

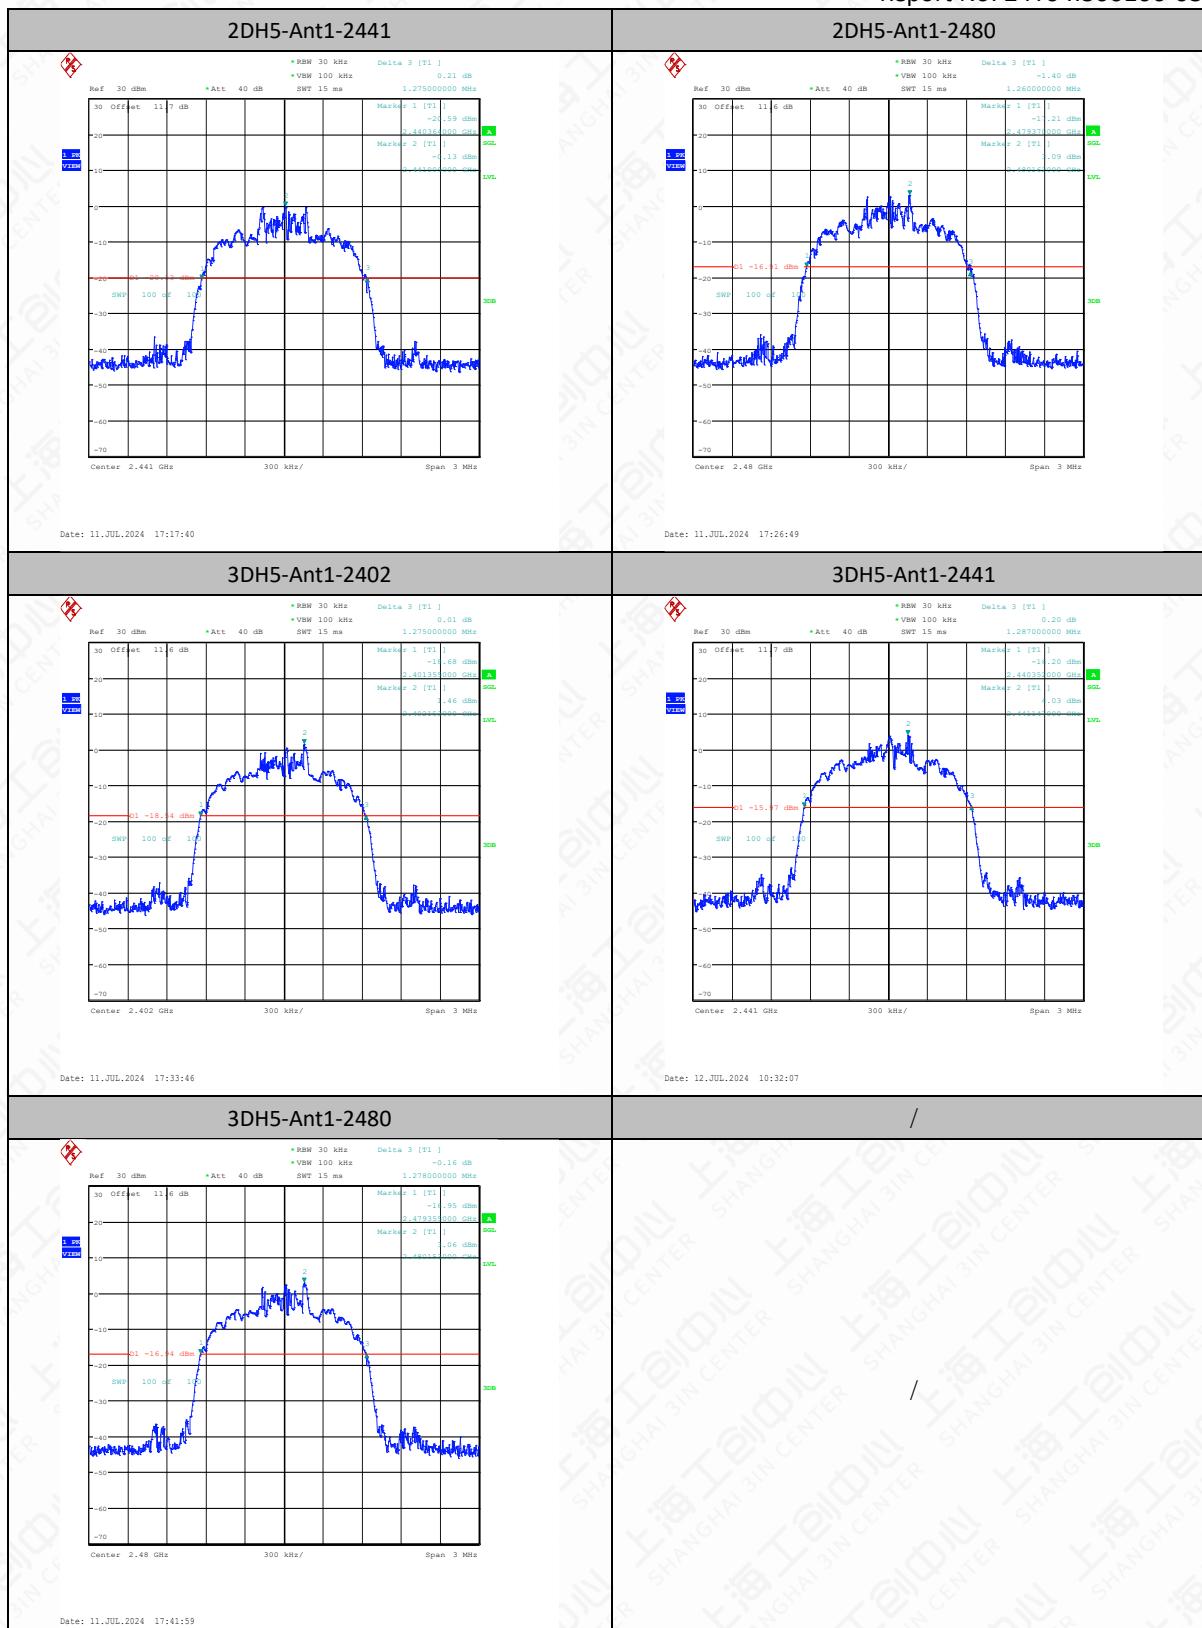

6.7 99% Occupied Bandwidth

6.7.1 Measurement Limit


Standard	Limit
N/A	N/A
RSS-GEN 6.7	N/A

6.7.2 Test procedures

The measurement is according to ANSI C63.10 clause 6.9.3.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set RBW shall be in the range of 1% to 5% of the OBW.
4. Set the VBW $\geq [3 \times \text{RBW}]$.
5. Detector = peak.
6. Trace mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize.
9. The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

6.7.3 Test setup

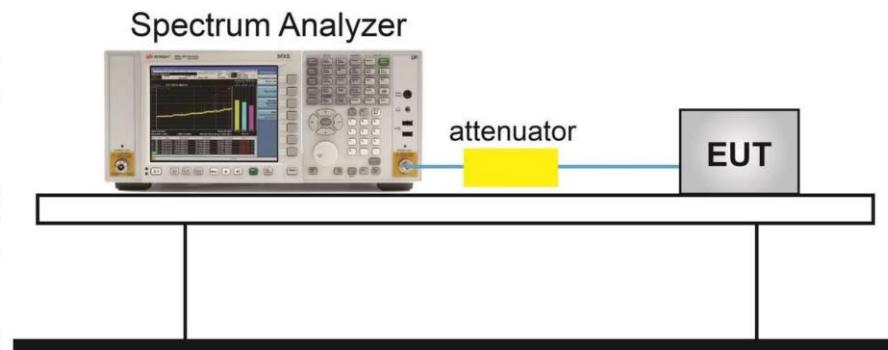



Note: The attenuator shown in the figure is the attenuation of the entire test system.

6.7.4 Measurement Result

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.762	2401.6190	2402.3810	---	---
DH5	Ant1	2441	0.759	2440.6190	2441.3780	---	---
DH5	Ant1	2480	0.765	2479.6160	2480.3810	---	---
2DH5	Ant1	2402	1.155	2401.4150	2402.5700	---	---
2DH5	Ant1	2441	1.149	2440.4180	2441.5670	---	---
2DH5	Ant1	2480	1.155	2479.4150	2480.5700	---	---
3DH5	Ant1	2402	1.158	2401.4180	2402.5760	---	---
3DH5	Ant1	2441	1.167	2440.4120	2441.5790	---	---
3DH5	Ant1	2480	1.167	2479.4150	2480.5820	---	---

Test graphs

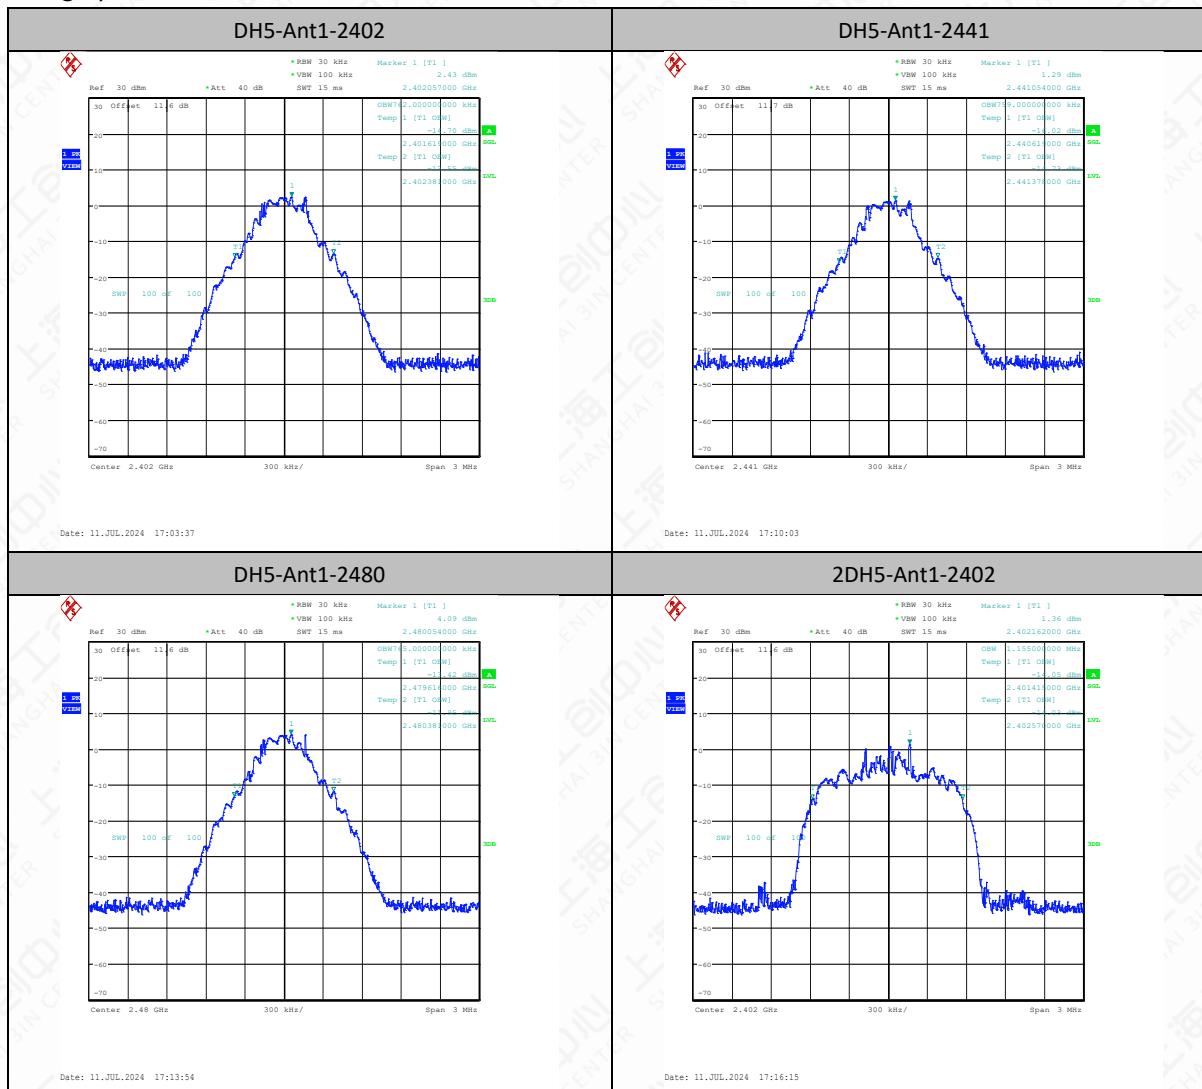

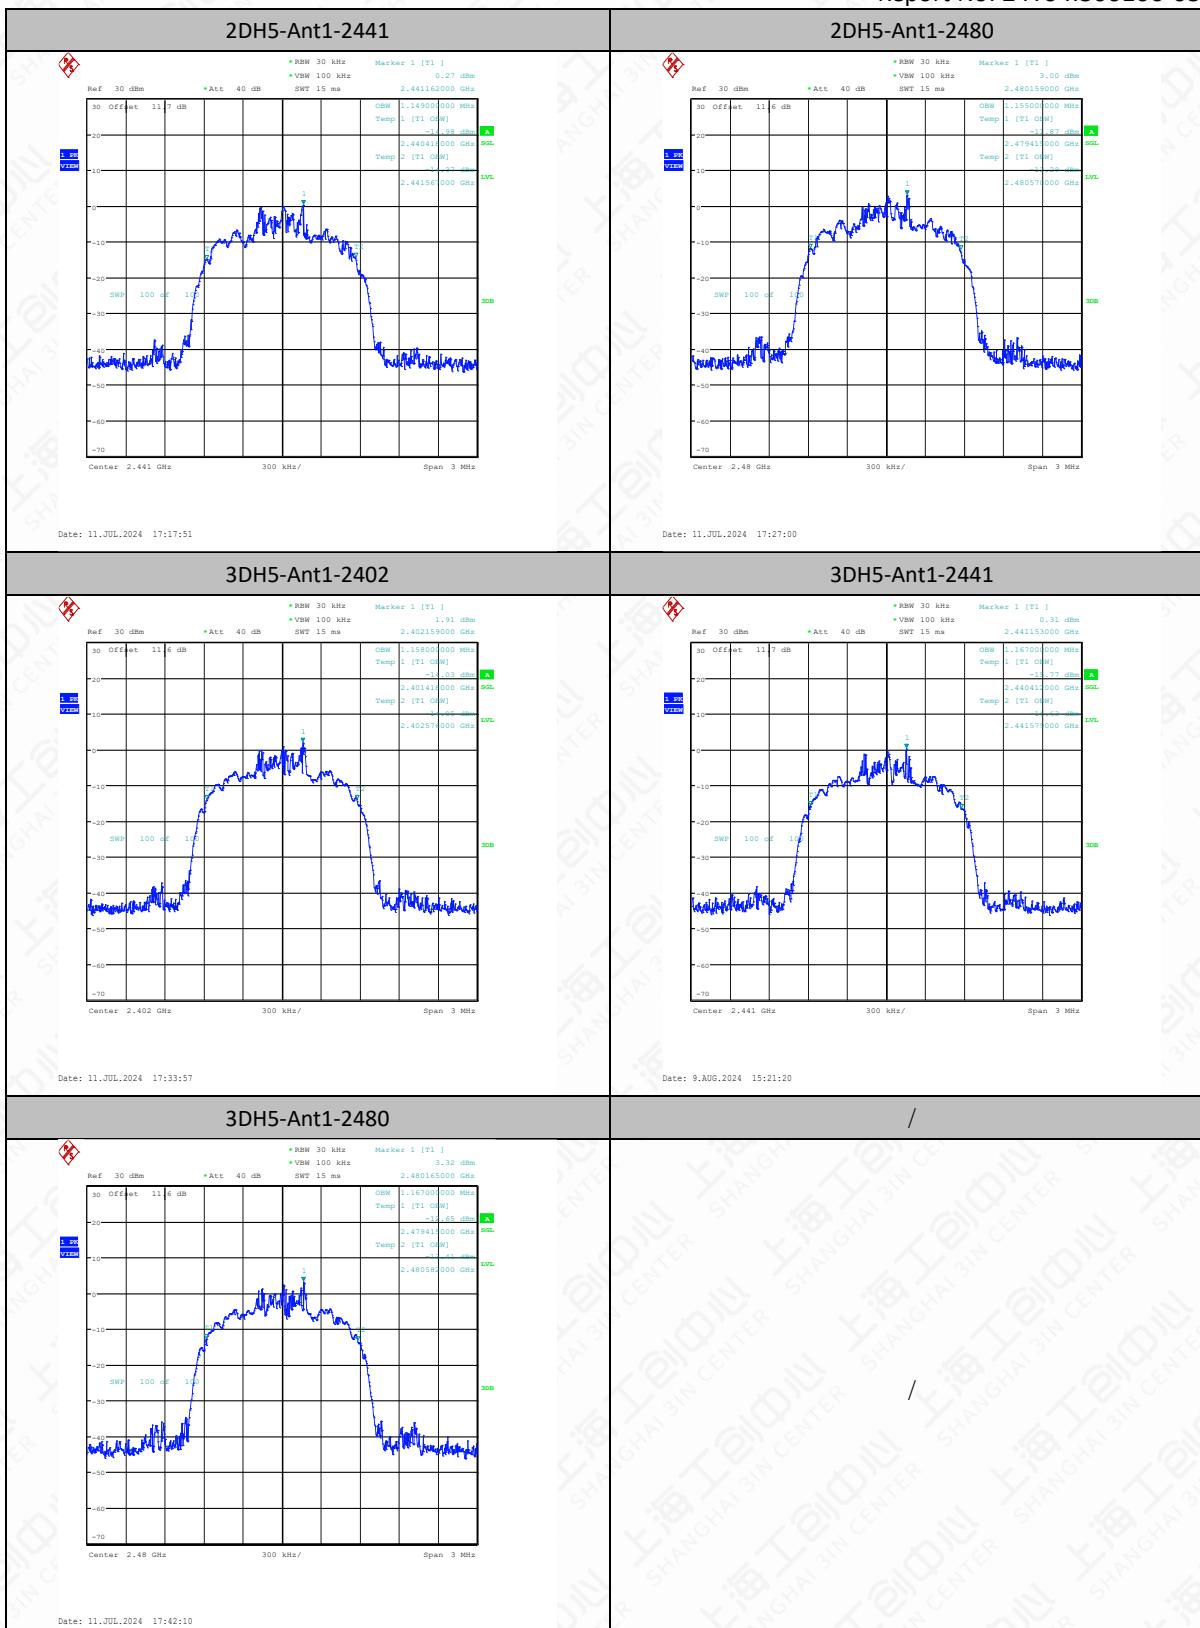

6.8 Carrier Frequency Separation

6.8.1 Measurement Limit


Standard	Limit(KHz)
FCC 47 Part 15.247 (a) (1)	GFSK: Over 25kHz or 20dB bandwidth $\pi/4$ DQPSK; 8DPSK: Over 25kHz or $(2/3)*20$ dB bandwidth
RSS-247 5.1	GFSK: Over 25kHz or 20dB bandwidth $\pi/4$ DQPSK; 8DPSK: Over 25kHz or $(2/3)*20$ dB bandwidth

6.8.2 Test procedures

The measurement is according to ANSI C63.10 clause 7.8.2.

1. Connect the EUT through cable and divide and spectrum analyzer.
2. Enable the EUT transmit in hopping mode.
3. Span: Wide enough to capture the peaks of two adjacent channels.
4. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
5. Video (or average) bandwidth (VBW) \geq RBW.
6. Sweep: Auto.
7. Detector function: Peak.
8. Trace: Max hold.
9. Allow the trace to stabilize.

6.8.3 Test Setup

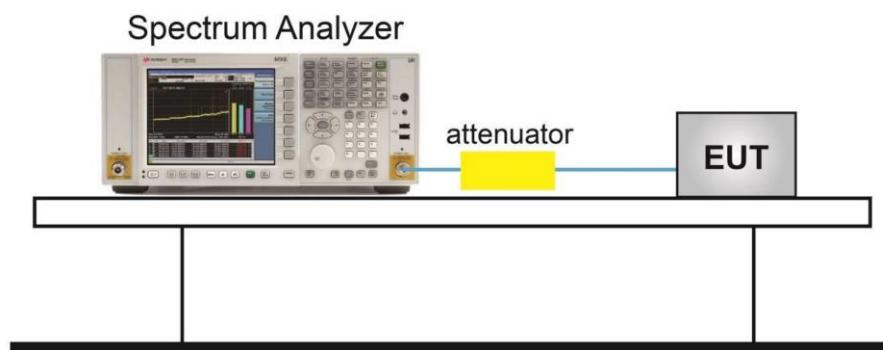


Note: The attenuator shown in the figure is the attenuation of the entire test system.

6.8.4 Measurement Result

TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.013	≥0.870	PASS
2DH5	Ant1	Hop	0.997	≥0.853	PASS
3DH5	Ant1	Hop	1.003	≥0.860	PASS

Test Graphs

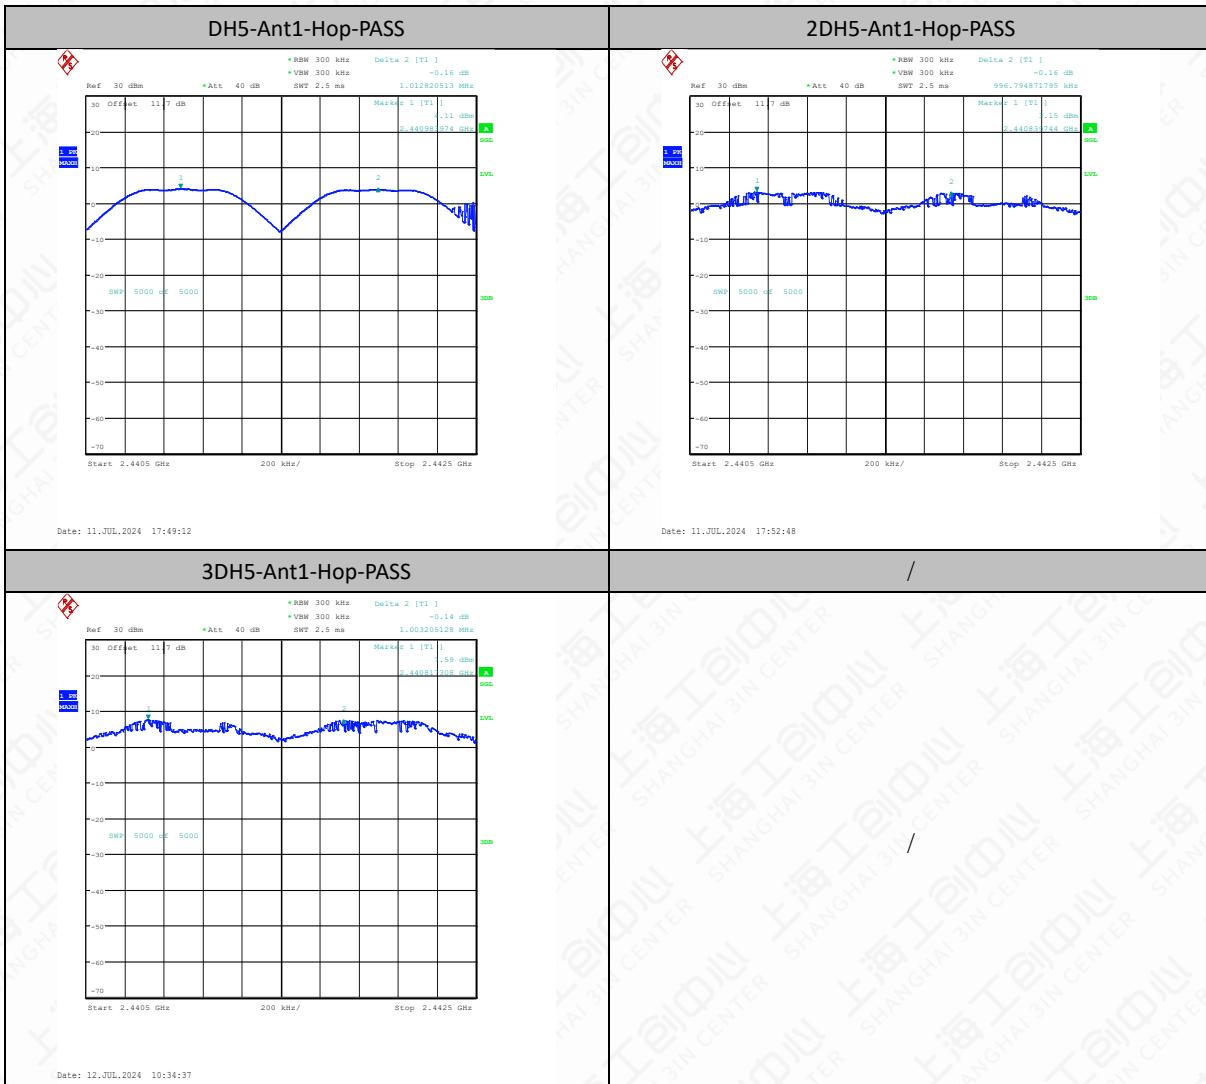

6.9 Number Of Hopping Channels

6.9.1 Measurement Limit


Standard	Limit
FCC 47 CFR Part 15.247 (a)(1)(iii)	At least 15 non-overlapping channels
RSS-247 5.1	At least 15 non-overlapping channels

6.9.2 Test procedure

The measurement is according to ANSI C63.10 clause 7.8.3.

1. Connect the EUT through cable and divide with CMW270 and spectrum analyzer.
2. Enable the EUT transmit in hopping mode.
3. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
4. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
5. VBW \geq RBW.
6. Sweep: Auto.
7. Detector function: Peak.
8. Trace: Max hold.
9. Allow the trace to stabilize.
10. Record the test results.

6.9.3 Test Setup

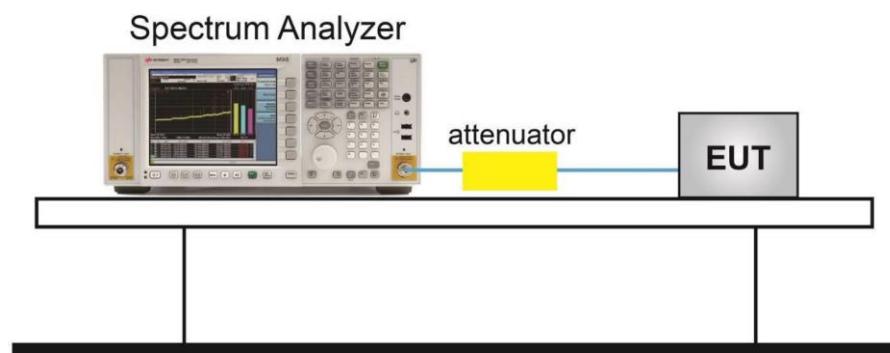


Note: The attenuator shown in the figure is the attenuation of the entire test system.

6.9.4 Measurement Result

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥ 15	PASS
2DH5	Ant1	Hop	79	≥ 15	PASS
3DH5	Ant1	Hop	79	≥ 15	PASS

Test Graphs

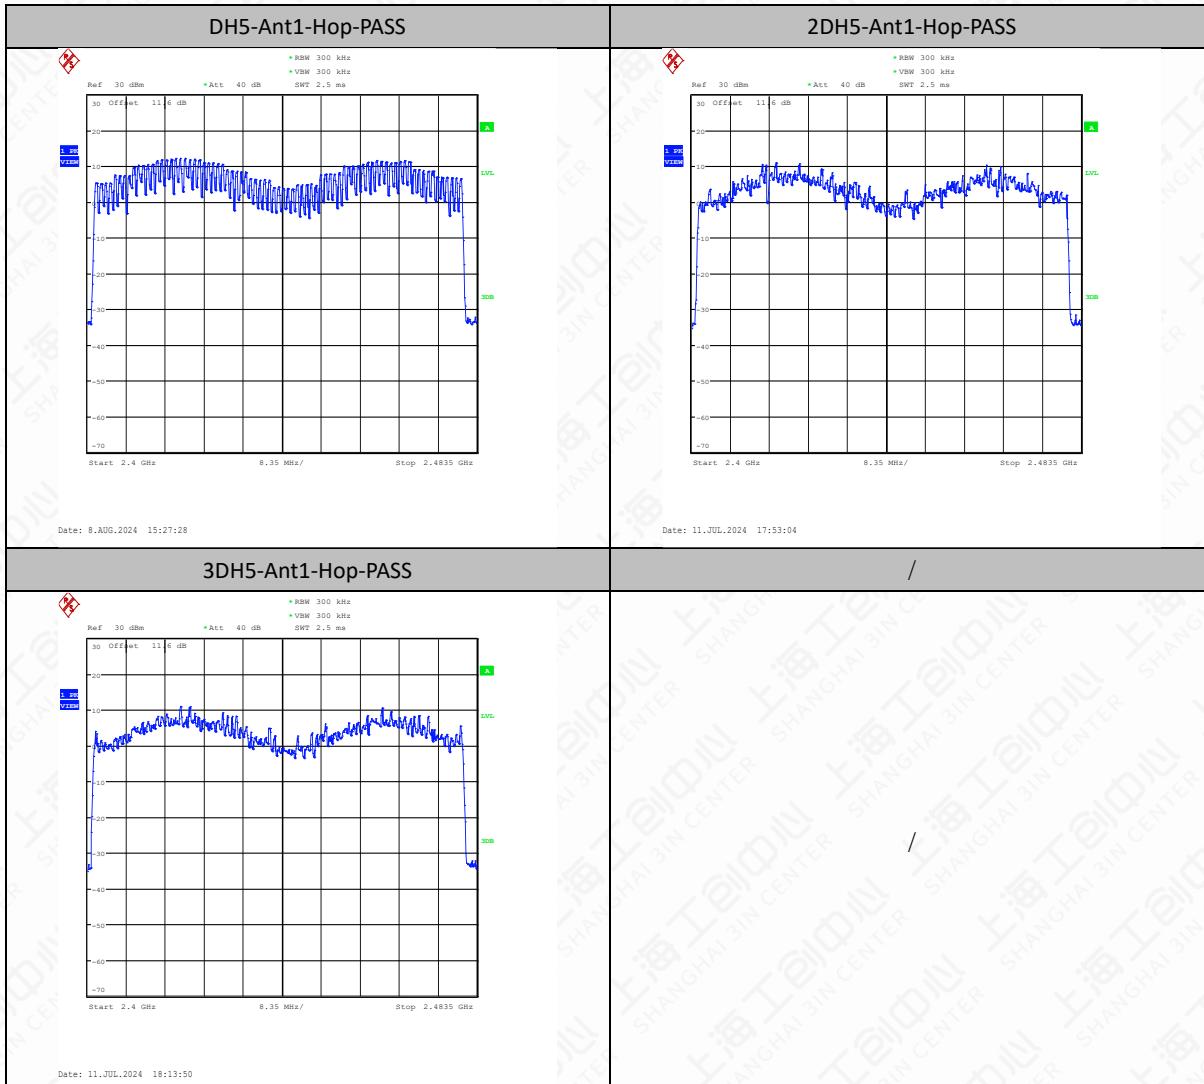


6.10 AC Powerline Conducted Emission

6.10.1 Method of Measurement: ANSI C63.10-2013-clause 6.2

1. The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
2. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
3. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
4. If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.³⁶ Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

6.10.2 Test Setup

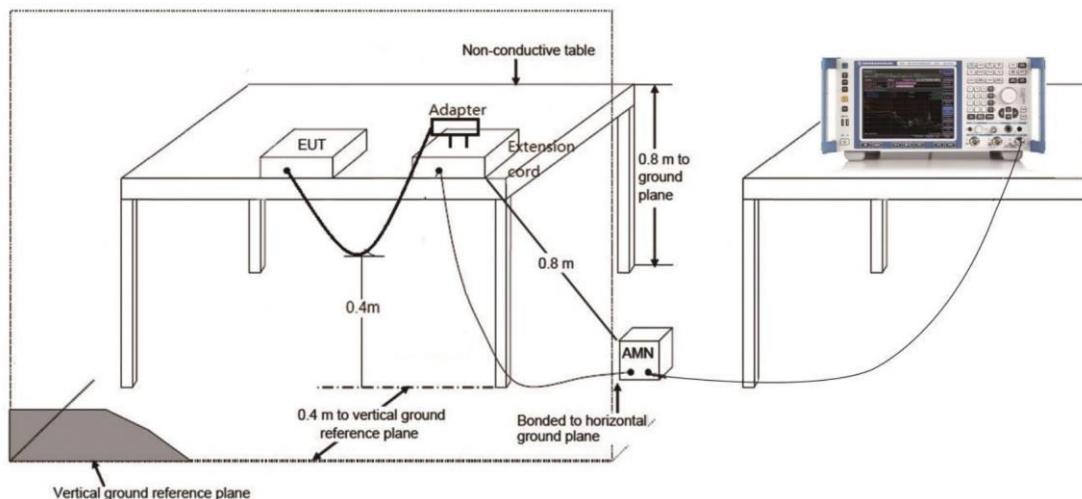

6.10.3 Test Condition

Voltage (V)	Frequency (Hz)
120	60


6.10.4 Measurement limit

(Quasi-peak-average Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Average Limit (dB μ V)	Conclusion
0.15 to 0.5	66 to 56	56 to 46	P
0.5 to 5	56	46	
5 to 30	60	50	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

6.10.5 Measurement Result

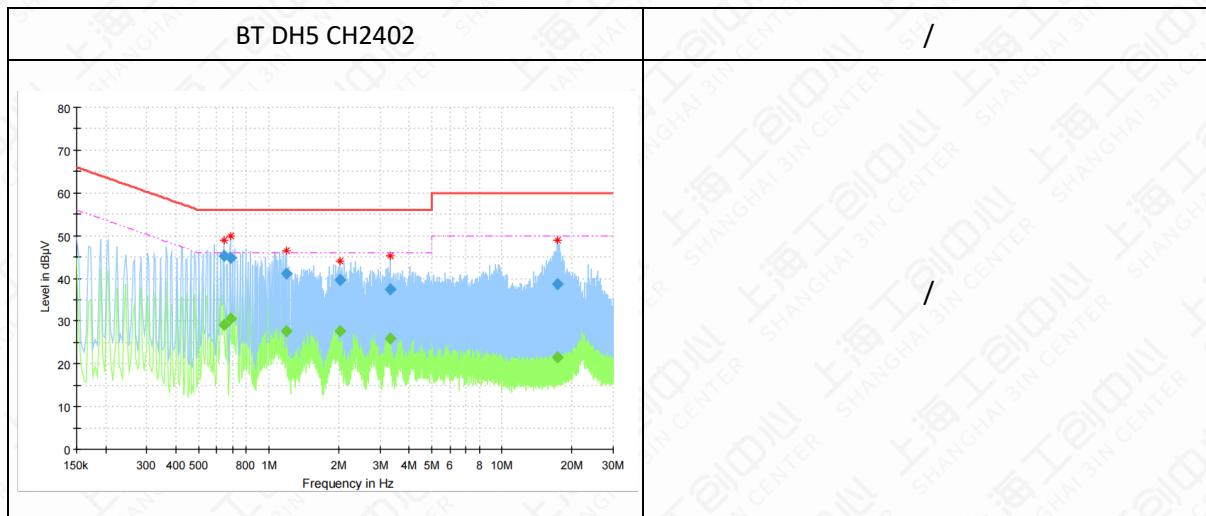

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.642525	---	29.09	46.00	16.91	15000.0	9.000	L1	ON	9.8
0.642525	45.34	---	56.00	10.66	15000.0	9.000	L1	ON	9.8
0.683569	---	30.47	46.00	15.53	15000.0	9.000	N	ON	10.5
0.683569	44.70	---	56.00	11.30	15000.0	9.000	N	ON	10.5
1.191019	---	27.61	46.00	18.39	15000.0	9.000	N	ON	10.5
1.191019	41.03	---	56.00	14.97	15000.0	9.000	N	ON	10.5
2.015625	---	27.65	46.00	18.35	15000.0	9.000	N	ON	10.6
2.015625	39.66	---	56.00	16.34	15000.0	9.000	N	ON	10.6
3.314100	---	26.05	46.00	19.95	15000.0	9.000	N	ON	10.7
3.314100	37.48	---	56.00	18.52	15000.0	9.000	N	ON	10.7
17.268975	---	21.53	50.00	28.47	15000.0	9.000	N	ON	12.9
17.268975	38.73	---	60.00	21.27	15000.0	9.000	N	ON	12.9

Note:

1. All modes have been tested and only the worst mode is recorded in the report.
2. L1 and N is all have been tested, the result of them is synthesized in the above data diagram.

Annex A: Revised History

Version	Revised Content
V0	Initial

Annex B: Accreditation Certificate



Accredited Laboratory

A2LA has accredited

INDUSTRIAL INTERNET INNOVATION CENTER (SHANGHAI) CO., LTD.

Shanghai, People's Republic of China

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

Presented this 20th day of September 2023.



Mr. Trace McInturff, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 3682.01
Valid to February 28, 2025



For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

END OF REPORT