



TEST REPORT

No. I19D00088-SAR01

For

Client: Shanghai Sunmi Technology Co.,Ltd.

Production: Smart POS system

Model Name: W6900

Brand Name SUNMI

FCC ID: 2AH25W6900

Hardware Version: V2.0

Software Version: V1.0

Issued date: 2019-7-25

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of ECIT Shanghai.

Test Laboratory:

ECIT Shanghai, East China Institute of Telecommunications

Add: 7-8F, G Area, No.668, Beijing East Road, Huangpu District, Shanghai, P. R. China

Tel: (+86)-021-63843300, E-Mail: welcome@ecit.org.cn

Revision Version

| Report Number | Revision | Date | Memo |
|----------------------|-----------------|-------------|---------------------------------|
| I19D00088-SAR01 | 00 | 2019-7-25 | Initial creation of test report |

CONTENTS

| | | |
|------|---|----|
| 1. | TEST LABORATORY | 6 |
| 1.1. | TESTING LOCATION | 6 |
| 1.2. | TESTING ENVIRONMENT | 6 |
| 1.3. | PROJECT DATA | 6 |
| 1.4. | SIGNATURE | 6 |
| 2. | STATEMENT OF COMPLIANCE | 7 |
| 3. | CLIENT INFORMATION | 9 |
| 3.1. | APPLICANT INFORMATION | 9 |
| 3.2. | MANUFACTURER INFORMATION | 9 |
| 4. | EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) | 10 |
| 4.1. | ABOUT EUT | 10 |
| 4.2. | INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST | 11 |
| 4.3. | INTERNAL IDENTIFICATION OF AE USED DURING THE TEST | 11 |
| 5. | TEST METHODOLOGY | 12 |
| 5.1. | APPLICABLE LIMIT REGULATIONS..... | 12 |
| 5.2. | APPLICABLE MEASUREMENT STANDARDS | 12 |
| 6. | SPECIFIC ABSORPTION RATE (SAR)..... | 13 |
| 6.1. | INTRODUCTION..... | 13 |
| 6.2. | SAR DEFINITION | 13 |
| 7. | TISSUE SIMULATING LIQUIDS | 14 |
| 7.1. | TARGETS FOR TISSUE SIMULATING LIQUID | 14 |
| 7.2. | DIELECTRIC PERFORMANCE | 15 |
| 8. | SYSTEM VERIFICATION | 16 |
| 8.1. | SYSTEM SETUP..... | 16 |
| 8.2. | SYSTEM VERIFICATION | 17 |
| 9. | MEASUREMENT PROCEDURES | 18 |

| | | |
|----------|---|-----|
| 9.1. | TESTS TO BE PERFORMED..... | 18 |
| 9.2. | GENERAL MEASUREMENT PROCEDURE..... | 19 |
| 9.3. | WCDMA MEASUREMENT PROCEDURES FOR SAR..... | 21 |
| 9.4. | BLUETOOTH & WI-FI MEASUREMENT PROCEDURES FOR SAR..... | 22 |
| 9.5. | POWER DRIFT | 22 |
| 10. | CONDUCTED OUTPUT POWER..... | 23 |
| 10.1. | GSM MEASUREMENT RESULT | 29 |
| 10.2. | WCDMA MEASUREMENT RESULT..... | 32 |
| 10.3. | LTE MEASUREMENT RESULT | 33 |
| 10.4. | CDMA MEASUREMENT RESULT | 41 |
| 10.5. | WI-FI AND BT MEASUREMENT RESULT | 41 |
| 11. | SIMULTANEOUS TX SAR CONSIDERATIONS | 44 |
| 11.1. | INTRODUCTION..... | 44 |
| 11.2. | TRANSMIT ANTENNA SEPARATION DISTANCES | 44 |
| 11.3. | STANDALONE SAR TEST EXCLUSION CONSIDERATIONS..... | 45 |
| 11.4. | SAR MEASUREMENT POSITIONS..... | 45 |
| 12. | SAR TEST RESULT | 47 |
| 12.1 | SAR RESULT FOR I18D00082-SAR01 | 47 |
| 12.2 | SAR RESULT FOR I19D00088-SAR01 | 64 |
| 13. | EVALUATION OF SIMULTANEOUS..... | 65 |
| 14. | SAR MEASUREMENT VARIABILITY | 69 |
| 15. | MEASUREMENT UNCERTAINTY | 70 |
| 16. | MAIN TEST INSTRUMENT | 72 |
| ANNEX A. | GRAPH RESULTS | 73 |
| ANNEX B. | SYSTEM VALIDATION RESULTS..... | 99 |
| ANNEX C. | SAR MEASUREMENT SETUP..... | 107 |
| ANNEX D. | POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM..... | 116 |

| | |
|---|------------|
| ANNEX E. EQUIVALENT MEDIA RECIPES | 119 |
| ANNEX F. SYSTEM VALIDATION | 120 |
| ANNEX G. PROBE AND DAE CALIBRATION CERTIFICATE | 121 |
| ANNEX H. ACCREDITATION CERTIFICATE..... | 234 |

1. Test Laboratory

1.1. Testing Location

| | |
|---------------|---|
| Company Name: | ECIT Shanghai, East China Institute of Telecommunications |
| Address: | 7-8F, G Area, No. 668, Beijing East Road, Huangpu District, Shanghai, P. R. China |
| Postal Code: | 200001 |
| Telephone: | (+86)-021-63843300 |
| Fax: | (+86)-021-63843301 |

1.2. Testing Environment

| | |
|-----------------------------|--------------|
| Normal Temperature: | 18-25°C |
| Relative Humidity: | 25-75% |
| Ambient noise & Reflection: | < 0.012 W/kg |

1.3. Project Data

| | |
|---------------------|-----------|
| Project Leader: | Yu Anlu |
| Testing Start Date: | 2018-6-28 |
| Testing End Date: | 2018-7-25 |


1.4. Signature



Yan Hang
(Prepared this test report)



Fu Erliang
(Reviewed this test report)



Zheng Zhongbin
(Approved this test report)

2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **W6900** are as follows .

Table 2.1: Max. Reported SAR (1g)

| Band | Reported SAR 1g(W/Kg) | |
|-------------|-------------------------|-------------------------|
| | Body(5mm) | Body(0mm) |
| GSM 850 | 1.265(Original) | 1.780(Current) |
| GSM 1900 | 1.236(Original) | 1.085(Original) |
| WCDMA Band2 | 1.212(Original) | 1.118(Original) |
| WCDMA Band4 | 1.136(Original) | 1.016(Original) |
| WCDMA Band5 | 0.709(Original) | 0.689(Original) |
| LTE Band2 | 1.310 (Original) | 1.373(Original) |
| LTE Band4 | 1.254(Original) | 1.789 (Original) |
| LTE Band7 | 1.277(Current) | 1.299(Current) |
| LTE Band17 | 0.196(Original) | 0.299(Current) |
| CDMA BC0 | 1.242(Original) | 1.045(Original) |
| CDMA BC1 | 1.202(Original) | 1.136(Original) |
| 2.4G Wi-Fi | 0.262(Current) | 0.293(Original) |

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue, 4.0 W/Kg as averaged over any 10g tissue according to the ANSI C95.1-1999.

For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The sample has four antennas. One is main antenna for GSM/WCDMA/LTE, and the other is for WiFi/BT/GPS and Diversity Antenna (CDMA) and NFC Antenna. Because the EUT not support hotspot ,so wifi and WWAN simultaneous transmission is not support.

Table 2.3: Simultaneous SAR

| Transmission SAR(W/Kg) | | | | | | | | |
|------------------------|--------------|-------|-------|-------|-----------|-------|-------|-------|
| Test Position | | 2G | 3G | 4G | 2.4G WIFI | CDMA | BT | SUM |
| Body 5mm | Phantom Side | 1.265 | 1.080 | 1.310 | 0.063 | 0.175 | 0.167 | 1.477 |
| | Ground Side | 1.053 | 1.105 | 1.254 | 0.029 | 1.242 | 0.167 | 1.421 |
| | Left Side | 0.502 | 0.263 | 0.199 | 0.029 | 0.313 | 0.167 | 0.669 |
| | Right Side | 1.236 | 1.212 | 1.136 | 0.262 | 0.132 | 0.167 | 1.403 |
| | Bottom Side | 0.830 | 0.791 | 1.277 | -- | -- | 0.167 | 1.444 |
| | Top Side | -- | -- | -- | 0.031 | 0.221 | 0.167 | 0.388 |
| Body 0mm | Phantom Side | 1.113 | 1.087 | 1.789 | 0.034 | 0.224 | 0.067 | 1.856 |
| | Ground Side | 0.669 | 0.955 | 1.141 | 0.021 | 1.136 | 0.067 | 1.208 |
| | Left Side | 0.358 | 0.184 | 0.189 | 0.016 | 0.279 | 0.067 | 0.425 |
| | Right Side | 1.074 | 1.118 | 1.373 | 0.293 | 0.103 | 0.067 | 1.44 |
| | Bottom Side | 0.765 | 0.748 | 1.299 | -- | -- | 0.067 | 1.366 |
| | Top Side | -- | -- | -- | 0.023 | 0.180 | 0.067 | 0.247 |

According to the above table, the maximum sum of reported SAR values for GSM/WCDMA/LTE/CDMA and BT is **1.477 W/kg** (1g). GSM/WCDMA/LTE/CDMA and BT is **1.856 W/kg** (10g)

3. Client Information

3.1. Applicant Information

Company Name: Shanghai Sunmi Technology Co.,Ltd.
Address: Room 505, KIC Plaza, No.388 Song Hu Road, Yang Pu District, Shanghai,
China
Email: zhangwentang@sunmi.com

3.2. Manufacturer Information

Company Name: Shanghai Sunmi Technology Co.,Ltd.
Address: Room 505, KIC Plaza, No.388 Song Hu Road, Yang Pu District, Shanghai,
China
Email: zhangwentang@sunmi.com

4. Equipment Under Test (EUT) and Ancillary Equipment (AE)

4.1. About EUT

| | |
|---------------------------------------|--|
| Description: | Smart POS system |
| Model name: | W6900 |
| Operation Model(s): | GSM850/900/1800/1900,WCDMA Band II/IV/V LTE Band 2/4/7/17/28,WIFI2.4G/5G,BT |
| Tx Frequency: | 824.2-848.8MHz(GSM850) 1850.2-1909.8MHz (GSM1900) 1852.4-1907.6 MHz (WCDMA Band II) 1712.4-1752.6 MHz (WCDMA Band IV) 826.4-846.6MHz (WCDMA Band V) 1850 -1910 MHz (LTE Band 2) 1710 -1755 MHz (LTE Band 4) 2500 - 2570 MHz (LTE Band 7) 704 -718MHz (LTE Band 17) 2412- 2462 MHz (Wi-Fi) 5150- 5350 MHz (Wi-Fi) 5725- 5825 MHz (Wi-Fi) 2400-2483.5 MHz (BT) |
| Test device Production information: | Production unit |
| GPRS/EGPRS Class Mode: | B |
| GPRS/ EGPRS Multislot Class: | 12 |
| Device type: | Portable device |
| UE category: | 3 |
| Antenna type: | Inner antenna |
| Accessories/Body-worn configurations: | Battery |
| Dimensions: | 61.3 mmX213mmX82.97mm |
| Hotspot Mode: | Not support |
| FCC ID: | 2AH25W6900 |

4.2. Internal Identification of EUT used during the test

| EUT ID* | SN or IMEI | HW Version | SW Version | Receive Date |
|---------|------------|------------|------------|--------------|
| N01 | N/A | V2.0 | V1.0 | 2019-6-20 |

*EUT ID: is used to identify the test sample in the lab internally.

4.3. Internal Identification of AE used during the test

| AE ID* | Description | Model | SN | Manufacturer |
|--------|-------------|-------|-----|--------------|
| N/A | N/A | N/A | N/A | N/A |

*AE ID: is used to identify the test sample in the lab internally.

5. TEST METHODOLOGY

5.1. Applicable Limit Regulations

ANSI C95.1–1999:IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue and **4.0 W/kg** as averaged over any 10 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2. Applicable Measurement Standards

IEEE 1528–2013: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices:

Experimental Techniques.

KDB248227 D01 802.11 Wi-Fi SAR v02r02: SAR measurement procedures for 802.112abg transmitters.

KDB447498 D01 General RF Exposure Guidance v06: Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04: SAR Measurement Requirements for 100 MHz to 6 GHz

KDB865664 D02 RF Exposure Reporting v01r02: provides general reporting requirements as well as certain specific information required to support MPE and SAR compliance.

KDB941225 D01 3G SAR Procedures v03r01: 3G SAR Measurement Procedures.

KDB 941225 D05 SAR for LTE Devices v02r05

NOTE: KDB is not in A2LA Scope List.

6. Specific Absorption Rate (SAR)

6.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7. Tissue Simulating Liquids

7.1. Targets for tissue simulating liquid

Table 7.1: Targets for tissue simulating liquid

| Frequency(MHz) | Liquid Type | Conductivity(σ) | $\pm 5\%$ Range | Permittivity(ϵ) | $\pm 5\%$ Range |
|----------------|-------------|--------------------------|-----------------|----------------------------|-----------------|
| 835 | Body | 0.97 | 0.92~1.02 | 55.2 | 52.4~58.0 |
| 1800 | Body | 1.52 | 1.44~1.60 | 53.3 | 50.6~56.0 |
| 1900 | Body | 1.52 | 1.44~1.60 | 53.3 | 50.6~56.0 |
| 2450 | Body | 1.95 | 1.85~2.05 | 52.7 | 50.1~55.3 |
| 2600 | Body | 2.16 | 2.05~2.27 | 52.5 | 50.9~55.1 |

7.2. Dielectric Performance


Table 7.2: Dielectric Performance of Tissue Simulating Liquid

| Measurement Value | | | | | | |
|-----------------------------|-----------|-------------------------|-----------|-----------------------|-----------|------------|
| Liquid Temperature: 22.5 °C | | | | | | |
| Type | Frequency | Permittivity ϵ | Drift (%) | Conductivity σ | Drift (%) | Test Date |
| Body | 750 MHz | 57.721 | 4.00% | 0.916 | -4.58% | 2019-06-28 |
| Body | 835 MHz | 56.731 | 2.77% | 0.998 | 2.89% | 2019-06-28 |
| Body | 1800 MHz | 55.227 | 3.62% | 1.479 | -2.70% | 2019-07-05 |
| Body | 1900 MHz | 52.274 | -1.92% | 1.485 | -2.30% | 2019-07-05 |
| Body | 2450 MHz | 54.788 | 3.96% | 1.927 | -1.18% | 2019-07-25 |
| Body | 2600MHz | 54.370 | 3.56% | 2.112 | -2.22% | 2019-07-20 |
| Body | 5200MHz | 50.168 | 2.38% | 5.128 | -3.25% | 2019-07-17 |
| Body | 5800MHz | 48.931 | 1.52% | 5.985 | -0.25% | 2019-07-17 |

8. System verification

8.1. System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

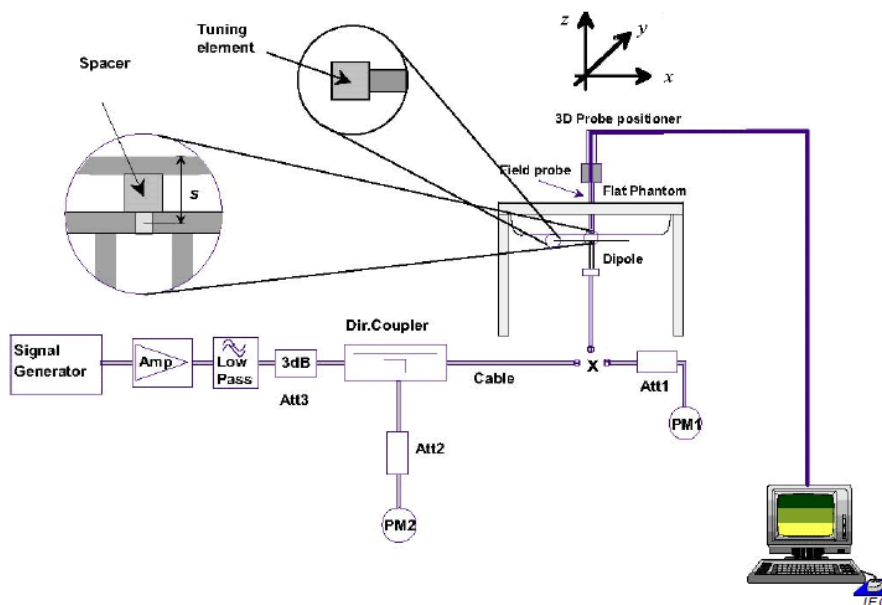

Picture 8.1 System Setup for System Evaluation



Picture 8.2 Photo of Dipole Setup

8.2. System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

Table 8.1: System Verification of Body

| Verification Results | | | | | | | |
|-----------------------|---------------------|-------------|-----------------------|-------------|--------------|-------------|------------|
| Input power level: 1W | | | | | | | |
| Frequency | Target value (W/kg) | | Measured value (W/kg) | | Deviation | | Test date |
| | 10 g Average | 1 g Average | 10 g Average | 1 g Average | 10 g Average | 1 g Average | |
| 750MHz | 5.7 | 8.55 | 5.92 | 8.64 | 3.86% | 1.05% | 2019-06-28 |
| 835 MHz | 6.4 | 9.75 | 6.6 | 9.96 | 3.12% | 2.15% | 2019-06-28 |
| 1750 MHz | 19.9 | 37.4 | 20.24 | 37.36 | 1.71% | -0.11% | 2019-07-05 |
| 1900 MHz | 21.2 | 40.4 | 20.44 | 39.24 | -3.58% | -2.87% | 2019-07-05 |
| 2450 MHz | 23.5 | 50.5 | 24.2 | 53.2 | 2.98% | 5.35% | 2019-07-25 |
| 2600 MHz | 24.1 | 54.3 | 24.88 | 55.6 | 3.24% | 2.39% | 2019-07-20 |
| 5200 MHz | 19.8 | 70.9 | 19.6 | 70.1 | -1.01% | -1.13% | 2019-07-17 |
| 5800 MHz | 20.2 | 72.6 | 19.6 | 71.3 | -2.97% | -1.79% | 2019-07-17 |

9. Measurement Procedures

9.1. Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in Picture 11.1.


Step 1: The tests described in 11.2 shall be performed at the channel that is closest to the centre of the transmit frequency band (f_c) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in Chapter 8),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 11.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

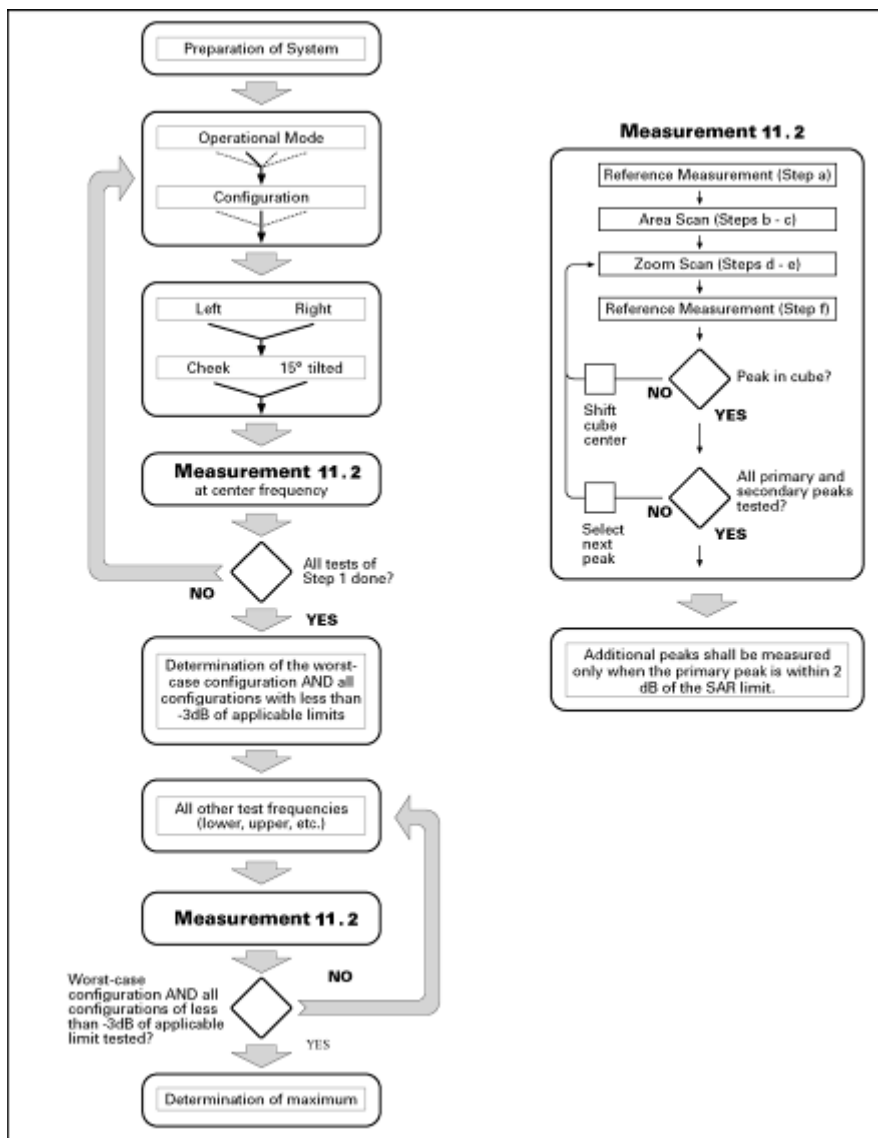

Picture 9.1Block diagram of the tests to be performed

9.2. General Measurement Procedure

The following procedure shall be performed for each of the test conditions (see Picture 11.1) described in 11.1:

- a) Measure the local SAR at a test point within 8 mm or less in the normal direction from the inner surface of the phantom.
- b) Measure the two-dimensional SAR distribution within the phantom (area scan procedure). The boundary of the measurement area shall not be closer than 20 mm from the phantom side walls. The distance between the measurement points should enable the detection of the location of local maximum with an accuracy of better than half the linear dimension of the tissue cube after interpolation. A maximum grid spacing of 20 mm for

frequencies below 3 GHz and $(60/f \text{ [GHz]})$ mm for frequencies of 3GHz and greater is recommended. The maximum distance between the geometrical centre of the probe detectors and the inner surface of the phantom shall be 5 mm for frequencies below 3 GHz and $\delta \ln(2)/2$ mm for frequencies of 3 GHz and greater, where δ is the plane wave skin depth and $\ln(x)$ is the natural logarithm. The maximum variation of the sensor-phantom surface shall be ± 1 mm for frequencies below 3 GHz and ± 0.5 mm for frequencies of 3 GHz and greater. At all measurement points the angle of the probe with respect to the line normal to the surface should be less than 5° . If this cannot be achieved for a measurement distance to the phantom inner surface shorter than the probe diameter, additional uncertainty evaluation is needed.

c) From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that are not within the zoom-scan volume; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR limit. This is consistent with the 2 dB threshold already stated;

d) Measure the three-dimensional SAR distribution at the local maxima locations identified in step c). The horizontal grid step shall be $(24/f[\text{GHz}])$ mm or less but not more than 8 mm. The minimum zoom size of 30 mm by 30 mm and 30 mm for frequencies below 3 GHz. For higher frequencies, the minimum zoom size of 22 mm by 22 mm and 22 mm. The grid step in the vertical direction shall be $(8/f[\text{GHz}])$ mm or less but not more than 5 mm, if uniform spacing is used. If variable spacing is used in the vertical direction, the maximum spacing between the two closest measured points to the phantom shell shall be $(12 / f[\text{GHz}])$ mm or less but not more than 4 mm, and the spacing between farther points shall increase by an incremental factor not exceeding 1.5. When variable spacing is used, extrapolation routines shall be tested with the same spacing as used in measurements. The maximum distance between the geometrical centre of the probe detectors and the inner surface of the phantom shall be 5 mm for frequencies below 3 GHz and $\delta \ln(2)/2$ mm for frequencies of 3 GHz and greater, where δ is the plane wave skin depth and $\ln(x)$ is the natural logarithm. Separate grids shall be centered on each of the local SAR maxima found in step c). Uncertainties due to field distortion between the media boundary and the dielectric enclosure of the probe should also be minimized, which is achieved is the distance between the phantom surface and physical tip of the probe is larger than probe tip diameter. Other methods may utilize correction procedures for these boundary effects that enable high precision measurements closer than half the probe diameter. For all measurement points, the angle of the probe with respect to the flat phantom surface shall be less than

5° . If this cannot be achieved an additional uncertainty evaluation is needed.

e) Use post processing(e.g. interpolation and extrapolation) procedures to determine the local SAR values at the spatial resolution needed for mass averaging.

9.3. WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH &DPDCH_n), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

For Release 5 HSDPA Data Devices:

| Sub-test | β_c | β_d | β_d (SF) | β_c / β_d | β_{hs} | CM/dB | MPR (dB) |
|----------|-----------|-----------|----------------|---------------------|--------------|-------|----------|
| 1 | 2/15 | 15/15 | 64 | 2/15 | 4/15 | 1.5 | 0 |
| 2 | 12/15 | 15/15 | 64 | 12/15 | 24/25 | 2.0 | 0 |
| 3 | 15/15 | 8/15 | 64 | 15/8 | 30/15 | 2.0 | 0 |
| 4 | 15/15 | 4/15 | 64 | 15/4 | 30/15 | 2.0 | 0 |

For Release 6 HSUPA Data Devices

| Sub-test | β_c | β_d | β_d (SF) | β_c / β_d | β_{hs} | β_{ec} | β_{ed} | β_{ed} (SF) | β_{ed} (codes) | CM (dB) | MPR (dB) | AG Index | E-TFCI |
|----------|-----------|-----------|----------------|---------------------|--------------|--------------|--------------|-------------------|----------------------|---------|----------|----------|--------|
| 1 | 11/15 | 15/15 | 64 | 11/15 | 22/15 | 209/225 | 1039/225 | 4 | 1 | 2.0 | 0 | 20 | 75 |
| 2 | 6/15 | 15/15 | 64 | 6/15 | 12/15 | 12/15 | 12/15 | 4 | 1 | 3.0 | 0 | 12 | 67 |

| | | | | | | | | | | | | | |
|---|-------|-------|----|-------|-------|-------|--|---|---|-----|---|----|----|
| 3 | 15/15 | 9/15 | 64 | 15/9 | 30/15 | 30/15 | $\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$ | 4 | 2 | 3.0 | 0 | 15 | 92 |
| 4 | 2/15 | 15/15 | 64 | 2/15 | 4/15 | 4/15 | 56/75 | 4 | 1 | 2.0 | 0 | 17 | 71 |
| 5 | 15/15 | 15/15 | 64 | 15/15 | 24/15 | 30/15 | 134/15 | 4 | 1 | 2.0 | 0 | 21 | 81 |

9.4. Bluetooth & Wi-Fi Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

9.5. Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Section 13 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

10. Conducted Output Power

Manufacturing tolerance

Table 10.1: GPRS/EGPRS (GMSK Modulation)

| GSM 850 GPRS | | | | |
|---------------|----------------------------|------------|------------|------------|
| Channel | | 128 | 190 | 251 |
| 1 Txslots | Maximum Target Value (dBm) | 33.0 | 33.0 | 33.0 |
| 2 Txslots | Maximum Target Value (dBm) | 32.5 | 32.5 | 32.5 |
| 3 Txslots | Maximum Target Value (dBm) | 31.0 | 31.0 | 31.0 |
| 4 Txslots | Maximum Target Value (dBm) | 30.0 | 30.0 | 30.0 |
| GSM 1900 GPRS | | | | |
| Channel | | 512 | 661 | 810 |
| 1 Txslots | Maximum Target Value (dBm) | 29.0 | 29.0 | 29.0 |
| 2 Txslots | Maximum Target Value (dBm) | 28.5 | 28.5 | 28.5 |
| 3 Txslots | Maximum Target Value (dBm) | 27.0 | 27.0 | 27.0 |
| 4 Txslots | Maximum Target Value (dBm) | 28.0 | 28.0 | 28.0 |

Table 10.2: EGPRS (8-PSK Modulation)

| GSM 850 EGPRS | | | | |
|----------------|----------------------------|------------|------------|------------|
| Channel | | 975 | 38 | 124 |
| 1 Txslots | Maximum Target Value (dBm) | 28.0 | 28.0 | 28.0 |
| 2 Txslots | Maximum Target Value (dBm) | 27.0 | 27.0 | 27.0 |
| 3 Txslots | Maximum Target Value (dBm) | 26.0 | 26.0 | 26.0 |
| 4 Txslots | Maximum Target Value (dBm) | 24.5 | 24.5 | 24.5 |
| GSM 1900 EGPRS | | | | |
| Channel | | 512 | 661 | 810 |
| 1 Txslots | Maximum Target Value (dBm) | 26.0 | 26.0 | 26.0 |
| 2 Txslots | Maximum Target Value (dBm) | 24.5 | 24.5 | 24.5 |
| 3 Txslots | Maximum Target Value (dBm) | 23.0 | 23.0 | 23.0 |
| 4 Txslots | Maximum Target Value (dBm) | 22.0 | 22.0 | 22.0 |

Table 10.3: WCDMA

| WCDMA Band II | | | |
|----------------------------|--------------|--------------|--------------|
| Channel | Channel 9262 | Channel 9400 | Channel 9538 |
| Maximum Target Value (dBm) | 21.5 | 21.5 | 21.5 |

| WCDMA Band II HSDPA | | | | | MPR (dB) |
|---------------------|----------------------------|------|------|----|----------|
| Channel | 9262 | 9400 | 9538 | | |
| 1 | Maximum Target Value (dBm) | 21 | 21 | 21 | 0 |
| 2 | Maximum Target Value (dBm) | 21 | 21 | 21 | 0 |
| 3 | Maximum Target Value (dBm) | 21 | 21 | 21 | 0 |
| 4 | Maximum Target Value (dBm) | 21 | 21 | 21 | 0 |
| WCDMA Band II HSUPA | | | | | MPR (dB) |
| Channel | 9262 | 9400 | 9538 | | |
| 1 | Maximum Target Value (dBm) | 21 | 21 | 21 | 0 |
| 2 | Maximum Target Value (dBm) | 20 | 20 | 20 | 0 |
| 3 | Maximum Target Value (dBm) | 20 | 20 | 20 | 0 |
| 4 | Maximum Target Value (dBm) | 20 | 20 | 20 | 0 |
| 5 | Maximum Target Value (dBm) | 20 | 20 | 20 | 0 |

Table 10.4: WCDMA

| WCDMA Band IV | | | |
|----------------------------|------|------|------|
| Channel | 1537 | 1638 | 1738 |
| Maximum Target Value (dBm) | 22.5 | 22.5 | 22.5 |

| WCDMA Band IV HSDPA | | | | | MPR (dB) |
|---------------------|----------------------------|------|------|------|----------|
| Channel | | 1537 | 1638 | 1738 | |
| 1 | Maximum Target Value (dBm) | 22 | 22 | 22 | 0 |
| 2 | Maximum Target Value (dBm) | 22 | 22 | 22 | 0 |
| 3 | Maximum Target Value (dBm) | 22 | 22 | 22 | 0 |
| 4 | Maximum Target Value (dBm) | 22 | 22 | 22 | 0 |
| WCDMA Band IV HSUPA | | | | | MPR (dB) |
| Channel | | 1537 | 1638 | 1738 | |
| 1 | Maximum Target Value (dBm) | 22 | 22 | 22 | 0 |
| 2 | Maximum Target Value (dBm) | 22 | 22 | 22 | 0 |
| 3 | Maximum Target Value (dBm) | 22 | 22 | 22 | 0 |
| 4 | Maximum Target Value (dBm) | 22 | 22 | 22 | 0 |
| 5 | Maximum Target Value (dBm) | 22 | 22 | 22 | 0 |

Table 10.5: WCDMA

| WCDMA Band V | | | |
|----------------------------|------|------|------|
| Channel | 4233 | 4182 | 4132 |
| Maximum Target Value (dBm) | 22.5 | 22.5 | 22.5 |

| WCDMA Band V HSDPA | | | | | MPR (dB) |
|--------------------|----------------------------|------|------|------|----------|
| Channel | | 4233 | 4182 | 4132 | |
| 1 | Maximum Target Value (dBm) | 22 | 22 | 22 | 0 |
| 2 | Maximum Target Value (dBm) | 22 | 22 | 22 | 0 |
| 3 | Maximum Target Value (dBm) | 22 | 22 | 22 | 0 |
| 4 | Maximum Target Value (dBm) | 22 | 22 | 22 | 0 |
| WCDMA Band V HSUPA | | | | | MPR (dB) |
| Channel | | 4233 | 4182 | 4132 | |
| 1 | Maximum Target Value (dBm) | 22 | 22 | 22 | 0 |
| 2 | Maximum Target Value (dBm) | 21 | 21 | 21 | 0 |
| 3 | Maximum Target Value (dBm) | 21 | 21 | 21 | 0 |
| 4 | Maximum Target Value (dBm) | 21 | 21 | 21 | 0 |
| 5 | Maximum Target Value (dBm) | 21 | 21 | 21 | 0 |

Table 10.6: LTE

| LTE Band2 | | | |
|----------------------------|------|------|------|
| RB Size | 1 | 50% | 100% |
| Maximum Target Value (dBm) | 23.5 | 22.5 | 22.5 |
| LTE Band4 | | | |
| RB Size | 1 | 50% | 100% |
| Maximum Target Value (dBm) | 23.5 | 23.0 | 23.0 |
| LTE Band7 | | | |
| RB Size | 1 | 50% | 100% |
| Maximum Target Value (dBm) | 21.5 | 20 | 20 |
| LTE Band17 | | | |
| RB Size | 1 | 50% | 100% |
| Maximum Target Value (dBm) | 23.5 | 22.5 | 22.5 |

Table 10.7: CDMA

| CDMA BC0 | | | | | |
|-------------------------|----------------------------|--|---------|------|------|
| Mode | | | Channel | | |
| | | | 1013 | 384 | 777 |
| 1xRTT RC1 SO55 | Maximum Target Value (dBm) | | 22 | 22 | 22 |
| 1xRTT RC3 SO55 | Maximum Target Value (dBm) | | 22 | 22 | 22 |
| 1xRTT RC3 SO32(+ F-SCH) | Maximum Target Value (dBm) | | 22 | 22 | 22 |
| 1xRTT RC3 SO32(+SCH) | Maximum Target Value (dBm) | | 22 | 22 | 22 |
| 1xEVDO RTAP 153.6Kbps | Maximum Target Value (dBm) | | 22 | 22 | 22 |
| CDMA BC1 | | | | | |
| Mode | | | Channel | | |
| | | | 25 | 600 | 1175 |
| 1xRTT RC1 SO55 | Maximum Target Value (dBm) | | 21.5 | 21.5 | 21.5 |
| 1xRTT RC3 SO55 | Maximum Target Value (dBm) | | 21.5 | 21.5 | 21.5 |
| 1xRTT RC3 SO32(+ F-SCH) | Maximum Target Value (dBm) | | 21.5 | 21.5 | 21.5 |
| 1xRTT RC3 SO32(+SCH) | Maximum Target Value (dBm) | | 21.5 | 21.5 | 21.5 |

| | | | | |
|-----------------------|----------------------------|------|------|------|
| 1xEVDO RTAP 153.6Kbps | Maximum Target Value (dBm) | 21.5 | 21.5 | 21.5 |
|-----------------------|----------------------------|------|------|------|

Table 10.8: WiFi

| WiFi 802.11b 2.4G | | | |
|----------------------------|-----------|-----------|------------|
| Channel | Channel 1 | Channel 6 | Channel 11 |
| Maximum Target Value (dBm) | 18 | 18 | 18 |
| WiFi 802.11g 2.4G | | | |
| Channel | Channel 1 | Channel 6 | Channel 11 |
| Maximum Target Value (dBm) | 17 | 17 | 17 |
| WiFi 802.11n 20M 2.4G | | | |
| Channel | Channel 1 | Channel 6 | Channel 11 |
| Maximum Target Value (dBm) | 17.5 | 17.5 | 17.5 |
| WiFi 802.11n 40M 2.4G | | | |
| Channel | Channel 1 | Channel 6 | Channel 11 |
| Maximum Target Value (dBm) | 14.5 | 14.5 | 14.5 |

Table 10.9: Bluetooth

| Bluetooth | | | |
|----------------------------|-----------|------------|------------|
| Channel | Channel 0 | Channel 39 | Channel 78 |
| Maximum Target Value (dBm) | 6.0 | 6.0 | 6.0 |

Table 10.10: Bluetooth 4.0

| Bluetooth | | | |
|----------------------------|-----------|------------|------------|
| Channel | Channel 0 | Channel 19 | Channel 39 |
| Maximum Target Value (dBm) | -1 | -1 | -1 |

10.1. GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

Table 10.11: The conducted power measurement results for GPRS

| GSM 850 GMSK | Measured Power (dBm) | | | calculation | Averaged Power (dBm) | | |
|-----------------|----------------------|-----|-----|-------------|----------------------|-----|-----|
| | 128 | 190 | 251 | | 128 | 190 | 251 |
| | | | | | | | |

| | | | | | | | |
|------------------|----------------------|------------|------------|-------------|----------------------|------------|------------|
| 1 Txslot | 32.79 | 32.71 | 32.72 | -9.03dB | 23.76 | 23.68 | 23.69 |
| 2 Txslots | 32.14 | 32.15 | 32.16 | -6.02dB | 26.12 | 26.13 | 26.14 |
| 3 Txslots | 30.57 | 30.59 | 30.58 | -4.26dB | 26.31 | 26.33 | 26.32 |
| 4 Txslots | 29.52 | 29.51 | 29.52 | -3.01dB | 26.51 | 26.5 | 26.51 |
| GSM 1900 GMSK | Measured Power (dBm) | | | calculation | Averaged Power (dBm) | | |
| | 512 | 661 | 810 | | 512 | 661 | 810 |
| 1 Txslot | 28.93 | 28.91 | 28.89 | -9.03dB | 19.9 | 19.88 | 19.86 |
| 2 Txslots | 28.31 | 28.34 | 28.32 | -6.02dB | 22.29 | 22.32 | 22.3 |
| 3 Txslots | 26.73 | 26.75 | 26.71 | -4.26dB | 22.47 | 22.49 | 22.45 |
| 4 Txslots | 27.76 | 27.7 | 27.67 | -3.01dB | 22.95 | 22.89 | 22.86 |

Table 10.12: The conducted power measurement results for E-GPRS

| GSM 850 8-PSK | Measured Power (dBm) | | | calculation | Averaged Power (dBm) | | |
|-------------------|----------------------|-------|-------|-------------|----------------------|-------|-------|
| | 128 | 190 | 251 | | 128 | 190 | 251 |
| 1 Txslot | 27.63 | 27.69 | 27.68 | -9.03dB | 18.6 | 18.66 | 18.65 |
| 2 Txslots | 26.83 | 26.81 | 26.82 | -6.02dB | 20.81 | 20.79 | 20.8 |
| 3 Txslots | 25.12 | 25.14 | 25.16 | -4.26dB | 20.86 | 20.88 | 20.9 |
| 4 Txslots | 24.12 | 24.16 | 24.18 | -3.01dB | 21.11 | 21.15 | 21.17 |
| GSM 1900 8-PSK | Measured Power (dBm) | | | calculation | Averaged Power (dBm) | | |
| | 512 | 661 | 810 | | 512 | 661 | 810 |
| 1 Txslot | 25.12 | 25.11 | 25.1 | -9.03dB | 16.09 | 16.08 | 16.07 |
| 2 Txslots | 24.1 | 24.12 | 24.13 | -6.02dB | 18.08 | 18.1 | 18.11 |
| 3 Txslots | 22.47 | 22.46 | 22.45 | -4.26dB | 18.21 | 18.2 | 18.19 |
| 4 Txslots | 21.68 | 21.71 | 21.69 | -3.01dB | 18.67 | 18.7 | 18.68 |

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 4Txslots for 850MHz ; 4Txslots for1900MHz;

10.2. WCDMA Measurement result

Table 10.13: The conducted Power for WCDMA

| Item | band | WCDMA BAND II result(dBm) | | |
|-------|-------|-----------------------------|-----------------------------|-----------------------------|
| | ARFCN | 9662 (1852.4MHz) | 9800 (1880.0MHz) | 9938 (1907.6MHz) |
| WCDMA | \ | 21.44 | 21.31 | 21.42 |
| HSDPA | 1 | 20.72 | 20.38 | 20.48 |
| | 2 | 20.5 | 20.18 | 20.3 |
| | 3 | 20.17 | 19.88 | 20.01 |
| | 4 | 20.09 | 19.78 | 19.88 |
| HSUPA | 1 | 20.07 | 19.78 | 19.87 |
| | 2 | 19.12 | 18.72 | 18.91 |
| | 3 | 19.11 | 18.86 | 18.84 |
| | 4 | 19.92 | 19.56 | 19.75 |
| | 5 | 19.72 | 19.46 | 19.64 |
| Item | band | WCDMA BAND IV result(dBm) | | |
| | ARFCN | Channel 1537 (1712.4MHz) | Channel 1638 (1732.6MHz) | Channel 1738 (1752.6MHz) |
| WCDMA | \ | 22.28 | 22.38 | 22.2 |
| HSDPA | 1 | 21.67 | 21.75 | 21.55 |
| | 2 | 21.77 | 21.86 | 21.67 |
| | 3 | 21.72 | 21.81 | 21.62 |
| | 4 | 21.75 | 21.82 | 21.63 |
| HSUPA | 1 | 21.65 | 21.74 | 21.55 |
| | 2 | 21.87 | 21.95 | 21.78 |
| | 3 | 21.75 | 21.85 | 21.64 |
| | 4 | 21.78 | 21.88 | 21.69 |
| | 5 | 21.69 | 21.78 | 21.59 |
| Item | band | WCDMA BAND V result(dBm) | | |
| | ARFCN | Channel 4132 (826.4MHz) | Channel 4183 (836.6MHz) | Channel 4233 (846.6MHz) |
| WCDMA | \ | 22.28 | 22.2 | 22.04 |
| HSDPA | 1 | 21.76 | 21.47 | 21.3 |
| | 2 | 21.54 | 21.27 | 21.12 |
| | 3 | 21.21 | 20.97 | 20.83 |
| | 4 | 21.13 | 20.87 | 20.7 |
| HSUPA | 1 | 21.11 | 20.87 | 20.69 |
| | 2 | 20.16 | 19.81 | 19.73 |
| | 3 | 20.15 | 19.95 | 19.66 |
| | 4 | 20.96 | 20.65 | 20.57 |
| | 5 | 20.76 | 20.55 | 20.46 |

10.3. LTE Measurement result

Table 10.14: The conducted Power for LTE BAND 2/4/7/17

| Band2 | | | | | | |
|-----------|-------|---------|-----------|-------------------------------|-----------------------------|-------------------------------|
| Bandwidth | Mode | RB Size | RB Offset | Actual output power(dBm) | | |
| | | | | Channel 18625 1852.5MHz | Channel 18900 1880MHz | Channel 19175 1907.5MHz |
| 5MHz | QPSK | 1 | 0 | 22.96 | 22.74 | 22.86 |
| | | 1 | 13 | 22.91 | 22.86 | 23.06 |
| | | 1 | 24 | 23.07 | 22.78 | 23 |
| | | 12 | 0 | 23.07 | 22.9 | 23.02 |
| | | 12 | 6 | 23.11 | 23.06 | 22.97 |
| | | 12 | 13 | 23.22 | 22.93 | 22.97 |
| | | 25 | 0 | 22.1 | 21.99 | 22 |
| | 16QAM | 1 | 0 | 22.02 | 21.88 | 21.65 |
| | | 1 | 13 | 21.98 | 21.79 | 21.77 |
| | | 1 | 24 | 21.71 | 21.74 | 21.64 |
| | | 12 | 0 | 22.12 | 21.95 | 21.99 |
| | | 12 | 6 | 22.17 | 21.99 | 22.02 |
| | | 12 | 13 | 22.01 | 21.98 | 21.8 |
| | | 25 | 0 | 21.19 | 21.1 | 20.92 |
| Bandwidth | Mode | RB Size | RB Offset | Actual output power(dBm) | | |
| | | | | Channel 18650 1855MHz | Channel 18900 1880MHz | Channel 19150 1905MHz |
| 10MHz | QPSK | 1 | 0 | 22.49 | 22.66 | 22.35 |
| | | 1 | 25 | 22.57 | 22.67 | 22.31 |
| | | 1 | 49 | 22.45 | 22.58 | 22.32 |
| | | 25 | 0 | 21.77 | 21.75 | 21.97 |
| | | 25 | 13 | 21.75 | 21.81 | 22.06 |
| | | 25 | 25 | 21.64 | 21.79 | 21.98 |
| | | 50 | 0 | 21.78 | 21.74 | 21.85 |
| | 16QAM | 1 | 0 | 21.28 | 21.18 | 20.89 |
| | | 1 | 25 | 21.86 | 21.78 | 21.44 |
| | | 1 | 49 | 21.4 | 21.47 | 21.06 |
| | | 25 | 0 | 20.77 | 20.81 | 20.88 |
| | | 25 | 13 | 20.66 | 20.85 | 20.97 |
| | | 25 | 25 | 20.67 | 20.71 | 20.99 |
| | | 50 | 0 | 20.76 | 20.77 | 20.97 |
| Bandwidth | Mode | RB Size | RB Offset | Actual output power(dBm) | | |

| | | | | Channel 18675 1857.5MHz | Channel 18900 1880MHz | Channel 19125 1902.5MHz |
|-----------|-------|---------|-----------|-------------------------------|-----------------------------|-------------------------------|
| | | | | Channel 18700 1860MHz | Channel 18900 1880MHz | Channel 19100 1900MHz |
| 15MHz | QPSK | 1 | 0 | 22.59 | 22.6 | 22.43 |
| | | 1 | 37 | 22.92 | 22.95 | 22.81 |
| | | 1 | 74 | 22.72 | 22.77 | 22.44 |
| | | 36 | 0 | 21.8 | 21.76 | 21.87 |
| | | 36 | 19 | 21.87 | 21.79 | 22.05 |
| | | 36 | 38 | 21.77 | 21.88 | 21.82 |
| | | 75 | 0 | 21.76 | 21.75 | 21.83 |
| | 16QAM | 1 | 0 | 21.13 | 21.1 | 20.9 |
| | | 1 | 37 | 21.18 | 21.32 | 21.41 |
| | | 1 | 74 | 21.5 | 21.38 | 21.54 |
| | | 36 | 0 | 20.91 | 20.81 | 20.94 |
| | | 36 | 19 | 20.9 | 20.92 | 21.13 |
| | | 36 | 38 | 21.07 | 20.93 | 20.9 |
| | | 75 | 0 | 20.94 | 20.67 | 20.91 |
| Bandwidth | Mode | RB Size | RB Offset | Actual output power(dBm) | | |
| | | | | Channel 18700 1860MHz | Channel 18900 1880MHz | Channel 19100 1900MHz |
| 20MHz | QPSK | 1 | 0 | 23.33 | 23.45 | 23.46 |
| | | 1 | 50 | 22.99 | 23.11 | 23.16 |
| | | 1 | 99 | 22.97 | 23.14 | 23.09 |
| | | 50 | 0 | 22.16 | 22.25 | 22.33 |
| | | 50 | 25 | 22.11 | 22.23 | 22.29 |
| | | 50 | 50 | 22.08 | 22.23 | 22.27 |
| | | 100 | 0 | 22.17 | 22.25 | 22.33 |
| | 16QAM | 1 | 0 | 21.49 | 21.8 | 21.4 |
| | | 1 | 50 | 21.82 | 21.97 | 21.77 |
| | | 1 | 99 | 21.4 | 21.76 | 21.6 |
| | | 50 | 0 | 21.23 | 21.21 | 21.11 |
| | | 50 | 25 | 21.29 | 21.14 | 21.02 |
| | | 50 | 50 | 21.22 | 21.04 | 21.06 |
| | | 100 | 0 | 21.24 | 21.14 | 21.07 |
| Bandwidth | Mode | RB Size | RB Offset | Actual output power(dBm) | | |
| | | | | Channel 18615 1851.5MHz | Channel 18900 1880MHz | Channel 19185 1908.5MHz |
| 3MHz | QPSK | 1 | 0 | 22.9 | 22.89 | 22.93 |
| | | 1 | 7 | 23.11 | 22.98 | 23.15 |
| | | 1 | 14 | 22.9 | 22.67 | 22.93 |
| | | 8 | 0 | 22.2 | 22.12 | 22.07 |

| Bandwidth | Mode | RB Size | RB Offset | Actual output power(dBm) | | | |
|-----------|--------|---------|-----------|-------------------------------|-----------------------------|-------------------------------|-------|
| | | | | Channel 18607 1850.7MHz | Channel 18900 1880MHz | Channel 19193 1909.3MHz | |
| 1.4MHz | 16QAM | 8 | 4 | 22.27 | 22.11 | 22.16 | |
| | | 8 | 7 | 22.13 | 22.09 | 22.11 | |
| | | 15 | 0 | 22.13 | 22.11 | 22.11 | |
| | | 1 | 0 | 21.5 | 21.81 | 21.41 | |
| | | 1 | 7 | 21.83 | 21.98 | 21.78 | |
| | | 1 | 14 | 21.41 | 21.77 | 21.61 | |
| | | 8 | 0 | 21.24 | 21.22 | 21.12 | |
| | | 8 | 4 | 21.3 | 21.15 | 21.03 | |
| | | 8 | 7 | 21.23 | 21.05 | 21.07 | |
| | 15 | 0 | 21.25 | 21.15 | 21.08 | | |
| | 1.4MHz | QPSK | 1 | 0 | 22.96 | 22.77 | 22.86 |
| | | | 1 | 3 | 22.98 | 22.92 | 22.94 |
| | | | 1 | 5 | 22.94 | 23.04 | 22.83 |
| | | | 3 | 0 | 22.18 | 22.02 | 21.96 |
| | | | 3 | 1 | 22.22 | 22.11 | 22.13 |
| 3 | | | 3 | 22.15 | 22.13 | 22.07 | |
| 6 | | | 0 | 21.96 | 22 | 22.09 | |
| 16QAM | | 1 | 0 | 21.75 | 21.52 | 21.52 | |
| | | 1 | 3 | 22.07 | 21.74 | 21.77 | |
| | | 1 | 5 | 21.56 | 21.51 | 21.67 | |
| | | 3 | 0 | 21.03 | 21.07 | 20.86 | |
| | | 3 | 1 | 20.97 | 21.09 | 21 | |
| | | 3 | 3 | 20.98 | 21.06 | 20.85 | |
| | | 6 | 0 | 21.19 | 21.12 | 20.95 | |

| Band4 | | | | | | |
|-----------|------|---------|-----------|-------------------------------|-------------------------------|-------------------------------|
| Bandwidth | Mode | RB Size | RB Offset | Actual output power(dBm) | | |
| | | | | Channel 19975 1712.5MHz | Channel 20175 1732.5MHz | Channel 20375 1752.5MHz |
| 5MHz | QPSK | 1 | 0 | 22.77 | 22.98 | 22.89 |
| | | 1 | 13 | 22.83 | 22.75 | 22.91 |
| | | 1 | 24 | 22.66 | 22.57 | 22.75 |
| | | 12 | 0 | 21.88 | 21.89 | 22.05 |
| | | 12 | 6 | 21.96 | 21.92 | 21.94 |
| | | 12 | 13 | 21.9 | 21.83 | 21.78 |

| Bandwidth | Mode | RB Size | RB Offset | Actual output power(dBm) | | |
|-----------|-------|---------|-----------|----------------------------|----------------------------|----------------------------|
| | | | | Channel 20000 1715MHz | Channel 20175 1732.5MHz | Channel 20350 1750MHz |
| | 16QAM | 25 | 0 | 21.95 | 21.82 | 21.86 |
| | | 1 | 0 | 21.73 | 21.52 | 21.56 |
| | | 1 | 13 | 21.97 | 21.71 | 21.72 |
| | | 1 | 24 | 21.1 | 20.94 | 21.05 |
| | | 12 | 0 | 20.97 | 20.97 | 20.91 |
| | | 12 | 6 | 20.94 | 20.78 | 21.02 |
| | | 12 | 13 | 20.89 | 20.9 | 20.84 |
| | | 25 | 0 | 20.97 | 20.79 | 20.83 |
| 10MHz | QPSK | 1 | 0 | 22.86 | 22.76 | 22.44 |
| | | 1 | 25 | 22.66 | 22.69 | 22.51 |
| | | 1 | 49 | 22.61 | 21.82 | 22.45 |
| | | 25 | 0 | 21.9 | 21.86 | 21.66 |
| | | 25 | 13 | 21.89 | 21.75 | 21.7 |
| | | 25 | 25 | 21.79 | 21.74 | 21.68 |
| | | 50 | 0 | 21.85 | 21.76 | 21.67 |
| | 16QAM | 1 | 0 | 21.95 | 21.61 | 21.67 |
| | | 1 | 25 | 21.76 | 21.57 | 21.71 |
| | | 1 | 49 | 21.48 | 21.27 | 21.53 |
| | | 25 | 0 | 20.72 | 20.71 | 20.68 |
| | | 25 | 13 | 20.71 | 20.66 | 20.82 |
| | | 25 | 25 | 20.9 | 20.93 | 20.8 |
| | | 50 | 0 | 20.92 | 20.81 | 20.75 |
| Bandwidth | Mode | RB Size | RB Offset | Actual output power(dBm) | | |
| | | | | Channel 20025 1717.5MHz | Channel 20175 1732.5MHz | Channel 20325 1747.5MHz |
| 15MHz | QPSK | 1 | 0 | 22.88 | 22.8 | 22.82 |
| | | 1 | 38 | 22.96 | 22.72 | 22.87 |
| | | 1 | 74 | 22.76 | 22.69 | 22.56 |
| | | 36 | 0 | 21.95 | 21.88 | 21.97 |
| | | 36 | 18 | 21.91 | 21.94 | 22.02 |
| | | 36 | 39 | 21.89 | 21.92 | 21.83 |
| | | 75 | 0 | 21.98 | 21.91 | 21.87 |
| | 16QAM | 1 | 0 | 21.3 | 21.51 | 21.62 |
| | | 1 | 38 | 21.83 | 21.99 | 22.13 |
| | | 1 | 74 | 21.48 | 21.66 | 21.38 |
| | | 36 | 0 | 20.83 | 20.8 | 20.87 |
| | | 36 | 18 | 20.85 | 20.94 | 20.92 |
| | | 36 | 39 | 20.7 | 20.84 | 20.73 |

| Bandwidth | Mode | 75 | 0 | 20.9 | 20.84 | 20.97 |
|-----------|-------|---------|-----------|-------------------------------|-------------------------------|-------------------------------|
| | | RB Size | RB Offset | Actual output power(dBm) | | |
| | | | | Channel 20050 1720MHz | Channel 20175 1732.5MHz | Channel 20300 1745MHz |
| 20MHz | QPSK | 1 | 0 | 23.38 | 23.35 | 23.28 |
| | | 1 | 50 | 23.28 | 23.35 | 23.17 |
| | | 1 | 99 | 23.03 | 23.29 | 23.08 |
| | | 50 | 0 | 22.65 | 22.48 | 22.61 |
| | | 50 | 25 | 22.41 | 22.49 | 22.6 |
| | | 50 | 50 | 22.46 | 22.43 | 22.61 |
| | | 100 | 0 | 22.41 | 22.46 | 22.63 |
| | 16QAM | 1 | 0 | 22.06 | 21.94 | 22.04 |
| | | 1 | 50 | 22.75 | 22.81 | 22.68 |
| | | 1 | 99 | 22.03 | 22.14 | 22.16 |
| | | 50 | 0 | 21.45 | 21.5 | 21.44 |
| | | 50 | 25 | 21.51 | 21.59 | 21.73 |
| | | 50 | 50 | 21.47 | 21.51 | 21.66 |
| | | 100 | 0 | 21.4 | 21.46 | 21.66 |
| Bandwidth | Mode | RB Size | RB Offset | Actual output power(dBm) | | |
| | | | | Channel 19965 1711.5MHz | Channel 20175 1732.5MHz | Channel 20385 1753.5MHz |
| | | | | Channel 19965 1711.5MHz | Channel 20175 1732.5MHz | Channel 20385 1753.5MHz |
| 3MHz | QPSK | 1 | 0 | 22.71 | 22.69 | 22.58 |
| | | 1 | 8 | 22.8 | 22.72 | 22.52 |
| | | 1 | 14 | 22.74 | 22.53 | 22.47 |
| | | 8 | 0 | 21.8 | 21.77 | 21.68 |
| | | 8 | 4 | 21.91 | 21.82 | 21.74 |
| | | 8 | 7 | 21.85 | 21.79 | 21.73 |
| | | 15 | 0 | 21.79 | 21.78 | 21.79 |
| | 16QAM | 1 | 0 | 21.52 | 21.57 | 21.45 |
| | | 1 | 8 | 21.6 | 21.21 | 21.55 |
| | | 1 | 15 | 21.25 | 21.28 | 21.35 |
| | | 8 | 0 | 20.71 | 20.7 | 20.59 |
| | | 8 | 4 | 20.72 | 20.65 | 20.55 |
| | | 8 | 7 | 20.61 | 20.73 | 20.55 |
| | | 15 | 0 | 20.74 | 20.89 | 20.71 |
| Bandwidth | Mode | RB Size | RB Offset | Actual output power(dBm) | | |
| | | | | Channel 19957 1710.7MHz | Channel 20175 1732.5MHz | Channel 20393 1754.3MHz |
| | | | | Channel 19957 1710.7MHz | Channel 20175 1732.5MHz | Channel 20393 1754.3MHz |
| 1.4MHz | QPSK | 1 | 0 | 22.74 | 22.7 | 22.79 |
| | | 1 | 2 | 22.98 | 22.84 | 23.06 |

| | | | | | | |
|--|-------|---|---|-------|-------|-------|
| | | 1 | 5 | 22.67 | 22.58 | 22.65 |
| | | 3 | 0 | 21.94 | 21.86 | 22.02 |
| | | 3 | 1 | 21.84 | 21.9 | 21.96 |
| | | 3 | 2 | 21.72 | 21.89 | 21.79 |
| | | 6 | 0 | 21.89 | 21.87 | 21.81 |
| | 16QAM | 1 | 0 | 21.27 | 21.25 | 21.69 |
| | | 1 | 2 | 21.57 | 21.44 | 22.25 |
| | | 1 | 5 | 21.34 | 21.08 | 21.47 |
| | | 3 | 0 | 20.83 | 20.87 | 21.03 |
| | | 3 | 1 | 20.95 | 20.91 | 20.97 |
| | | 3 | 2 | 20.84 | 20.89 | 20.8 |
| | | 6 | 0 | 21.01 | 20.88 | 20.81 |

| Band7 | | | | | | |
|-----------|-------|---------|-----------|----------------------------|--------------------------|----------------------------|
| Bandwidth | Mode | RB Size | RB Offset | Actual output power(dBm) | | |
| | | | | Channel 20775 2502.5MHz | Channel 21100 2535MHz | Channel 21425 2567.5MHz |
| 5MHz | QPSK | 1 | 0 | 20.98 | 21.01 | 20.94 |
| | | 1 | 13 | 21.06 | 21.04 | 20.96 |
| | | 1 | 24 | 20.89 | 20.92 | 20.86 |
| | | 12 | 0 | 19.95 | 19.97 | 19.87 |
| | | 12 | 6 | 19.81 | 19.85 | 19.89 |
| | | 12 | 13 | 19.78 | 19.75 | 19.71 |
| | | 25 | 0 | 19.84 | 19.82 | 19.76 |
| | 16QAM | 1 | 0 | 20.03 | 19.97 | 19.96 |
| | | 1 | 13 | 20.04 | 20.11 | 19.84 |
| | | 1 | 24 | 19.88 | 19.85 | 19.66 |
| | | 12 | 0 | 19.01 | 18.89 | 18.63 |
| | | 12 | 6 | 18.74 | 18.92 | 18.96 |
| | | 12 | 13 | 18.69 | 18.77 | 18.63 |
| | | 25 | 0 | 18.74 | 18.78 | 18.74 |
| Bandwidth | Mode | RB Size | RB Offset | Actual output power(dBm) | | |
| | | | | Channel 20800 2505MHz | Channel 21100 2535MHz | Channel 21400 2565MHz |
| 10MHz | QPSK | 1 | 0 | 21.05 | 20.92 | 21.06 |
| | | 1 | 25 | 20.95 | 21.02 | 20.97 |
| | | 1 | 49 | 20.74 | 20.81 | 20.89 |
| | | 25 | 0 | 19.93 | 19.89 | 19.77 |
| | | 25 | 13 | 19.88 | 19.84 | 19.71 |

| | 16QAM | 25 | 25 | 19.68 | 19.75 | 19.82 |
|-----------|-------|---------|-----------|-------------------------------|-----------------------------|-------------------------------|
| | | 50 | 0 | 19.76 | 19.82 | 19.87 |
| | | 1 | 0 | 20.06 | 19.91 | 20.18 |
| | | 1 | 25 | 19.91 | 20.02 | 19.95 |
| | | 1 | 49 | 19.63 | 19.75 | 19.76 |
| | | 25 | 0 | 18.99 | 18.81 | 18.78 |
| | | 25 | 13 | 18.81 | 18.79 | 18.78 |
| | | 25 | 25 | 18.69 | 18.77 | 18.71 |
| | | 50 | 0 | 18.73 | 18.78 | 18.85 |
| Bandwidth | Mode | RB Size | RB Offset | Actual output power(dBm) | | |
| | | | | Channel 20825 2507.5MHz | Channel 21100 2535MHz | Channel 21375 2562.5MHz |
| 15MHz | QPSK | 1 | 0 | 20.85 | 20.81 | 20.86 |
| | | 1 | 38 | 20.71 | 20.78 | 20.77 |
| | | 1 | 74 | 20.67 | 20.58 | 20.62 |
| | | 36 | 0 | 19.83 | 19.84 | 19.76 |
| | | 36 | 18 | 19.75 | 19.68 | 19.65 |
| | | 36 | 39 | 19.69 | 19.72 | 19.81 |
| | | 75 | 0 | 19.71 | 19.73 | 19.78 |
| | 16QAM | 1 | 0 | 19.85 | 19.8 | 19.88 |
| | | 1 | 38 | 19.69 | 19.79 | 19.75 |
| | | 1 | 74 | 19.56 | 19.51 | 19.49 |
| | | 36 | 0 | 18.89 | 18.76 | 18.77 |
| | | 36 | 18 | 18.68 | 18.65 | 18.72 |
| | | 36 | 39 | 18.71 | 18.74 | 18.69 |
| | | 75 | 0 | 18.61 | 18.69 | 18.76 |
| Bandwidth | Mode | RB Size | RB Offset | Actual output power(dBm) | | |
| | | | | Channel 20850 2510MHz | Channel 21100 2535MHz | Channel 21350 2560MHz |
| 20MHz | QPSK | 1 | 0 | 21.15 | 21.12 | 21.24 |
| | | 1 | 50 | 20.95 | 21.02 | 20.97 |
| | | 1 | 99 | 20.74 | 20.81 | 20.89 |
| | | 50 | 0 | 19.87 | 19.89 | 19.92 |
| | | 50 | 25 | 19.88 | 19.84 | 19.71 |
| | | 50 | 50 | 19.68 | 19.75 | 19.82 |
| | | 100 | 0 | 19.76 | 19.82 | 19.87 |
| | 16QAM | 1 | 0 | 20.06 | 19.91 | 20.18 |
| | | 1 | 50 | 19.91 | 20.02 | 19.95 |
| | | 1 | 99 | 19.63 | 19.75 | 19.76 |
| | | 50 | 0 | 18.99 | 18.81 | 18.78 |
| | | 50 | 25 | 18.81 | 18.79 | 18.78 |

| | | | | | | |
|--|--|-----|----|-------|-------|-------|
| | | 50 | 50 | 18.69 | 18.77 | 18.71 |
| | | 100 | 0 | 18.73 | 18.78 | 18.85 |

| Band17 | | | | | | |
|-----------|-------|---------|-----------|-------------------------------|-----------------------------|------------------------------|
| Bandwidth | Mode | RB Size | RB Offset | Actual output power(dBm) | | |
| | | | | Channel 23755 706.5 MHz | Channel 23790 710 MHz | Channel 23825 713.5MHz |
| 5MHz | QPSK | 1 | 0 | 22.77 | 22.83 | 22.93 |
| | | 1 | 12 | 23.03 | 23.08 | 22.97 |
| | | 1 | 24 | 23.13 | 23.18 | 22.99 |
| | | 12 | 0 | 23.08 | 22.92 | 23.10 |
| | | 12 | 6 | 23.06 | 23.09 | 23.15 |
| | | 12 | 13 | 23.07 | 23.09 | 23.14 |
| | | 25 | 0 | 21.96 | 21.96 | 22.11 |
| | 16QAM | 1 | 0 | 21.61 | 21.40 | 21.42 |
| | | 1 | 12 | 21.60 | 21.48 | 21.71 |
| | | 1 | 24 | 21.70 | 21.61 | 21.57 |
| | | 12 | 0 | 22.04 | 22.19 | 22.09 |
| | | 12 | 6 | 22.01 | 22.04 | 22.12 |
| | | 12 | 13 | 22.16 | 22.14 | 22.10 |
| | | 25 | 0 | 21.15 | 21.04 | 20.98 |
| Bandwidth | Mode | RB Size | RB Offset | Actual output power(dBm) | | |
| | | | | Channel 23780 709MHz | Channel 23790 710MHz | Channel 23800 711MHz |
| 10MHz | QPSK | 1 | 0 | 23.10 | 23.12 | 23.16 |
| | | 1 | 25 | 23.25 | 23.28 | 23.27 |
| | | 1 | 49 | 23.22 | 23.23 | 23.23 |
| | | 25 | 0 | 22.25 | 22.27 | 22.32 |
| | | 25 | 13 | 22.33 | 22.37 | 22.32 |
| | | 25 | 25 | 22.36 | 22.35 | 22.34 |
| | | 50 | 0 | 22.34 | 22.33 | 22.34 |
| | 16QAM | 1 | 0 | 22.89 | 22.96 | 22.85 |
| | | 1 | 25 | 22.84 | 22.81 | 22.80 |
| | | 1 | 49 | 22.72 | 22.73 | 22.40 |
| | | 25 | 0 | 22.04 | 22.09 | 22.02 |
| | | 25 | 13 | 21.92 | 21.97 | 21.87 |
| | | 25 | 25 | 21.95 | 21.86 | 21.80 |
| | | 50 | 0 | 21.87 | 21.95 | 21.83 |

10.4. CDMA Measurement result

Table 10.15: The conducted power for CDMA

| Band | CDMA2000 BC0 | | | CDMA2000 BC1 | | |
|-------------------------|--------------|--------|--------|--------------|---------|---------|
| Channel | 1013 | 384 | 777 | 25 | 600 | 1175 |
| Frequency (MHz) | 824.7 | 836.52 | 848.31 | 1851.25 | 1880.00 | 1908.75 |
| 1xRTT RC1 SO55 | 21.74 | 21.77 | 21.75 | 21.25 | 21.22 | 20.95 |
| 1xRTT RC3 SO55 | 21.74 | 21.80 | 21.78 | 21.23 | 21.21 | 20.95 |
| 1xRTT RC3 SO32(+ F-SCH) | 21.73 | 21.80 | 21.77 | 21.22 | 21.21 | 20.93 |
| 1xRTT RC3 SO32(+SCH) | 21.74 | 21.77 | 21.75 | 21.27 | 21.21 | 20.95 |
| 1xEVDO RTAP 153.6Kbps | 21.74 | 21.85 | 21.82 | 21.27 | 21.20 | 20.97 |

10.5. Wi-Fi and BT Measurement result

Table 10.16: The conducted power for Bluetooth

| GFSK | | | |
|---------------------------------|----------------|----------------|----------------|
| Channel | Ch0 (2402 MHz) | Ch39 (2441MHz) | CH78 (2480MHz) |
| Conducted Output Power (dBm) | 5.1 | 5.5 | 4.74 |
| $\pi/4$ DQPSK | | | |
| Channel | Ch0 (2402 MHz) | Ch39 (2441MHz) | CH78 (2480MHz) |
| Conducted Output Power (dBm) | 3.75 | 4.01 | 3.12 |
| 8DPSK | | | |
| Channel | Ch0 (2402 MHz) | Ch39 (2441MHz) | CH78 (2480MHz) |
| Conducted Output Power (dBm) | 3.71 | 4.4 | 3.9 |

Table 10.17: The conducted power for Bluetooth4.0

| GFSK | | | |
|------------------------------|----------------|----------------|----------------|
| Channel | Ch0 (2402 MHz) | Ch19 (2440MHz) | CH39 (2480MHz) |
| Conducted Output Power (dBm) | -2.03 | -2.09 | -2.21 |

NOTE: According to KDB447498 D01 BT standalone SAR are not required, because maximum average output power is less than 10mW.

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to

the following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm) • [$\sqrt{f(\text{GHz})/x}$] W/kg for test separation distances ≤ 50 mm;
 where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.

SAR body value of BT is 0.083 W/Kg.

The default power measurement procedures are:

- a) Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.
- b) Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.
 - 1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.
 - 2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.
- c) For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.

During WLAN SAR testing EUT is configured with the WLAN continuous TX tool, and the transmission duty factor was monitored on the spectrum analyzer with zero-span setting, the duty cycle is 100%.

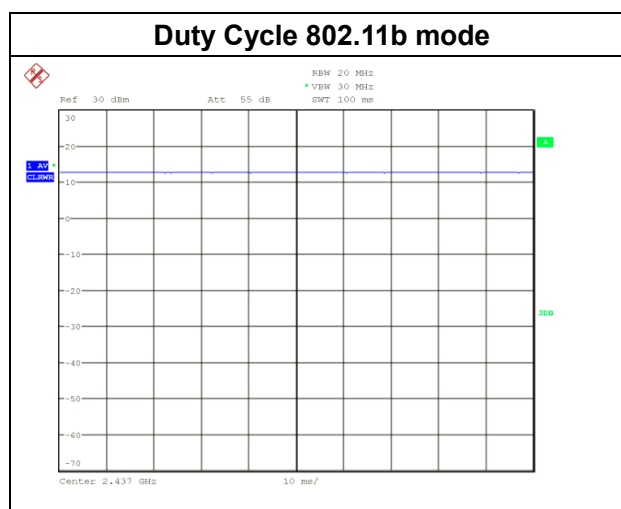


Table 10.18: The average conducted power for WiFi

| Mode | Channel | Frequency | Average power(dBm) |
|-----------------|---------|-----------|--------------------|
| 802.11 b | 1 | 2412 MHZ | 17.71 |
| | 6 | 2437 MHZ | 17.55 |
| | 11 | 2462 MHZ | 17.54 |
| 802.11 g | 1 | 2412 MHZ | 16.46 |
| | 6 | 2437 MHZ | 16.35 |
| | 11 | 2462 MHZ | 16.32 |
| 802.11 n 20M | 1 | 2412 MHZ | 16.86 |
| | 6 | 2437 MHZ | 16.98 |
| | 11 | 2462 MHZ | 17.10 |
| 802.11 n 40M | 3 | 2422 MHZ | 14.21 |
| | 6 | 2437 MHZ | 14.23 |
| | 9 | 2452 MHZ | 14.35 |

2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.

- a) When KDB Publication 447498 D01 SAR test exclusion applies to the OFDM configuration.
- b) When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.


11. Simultaneous TX SAR Considerations

11.1. Introduction

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

For this device, the BT and Wi-Fi can transmit simultaneous with other transmitters.

11.2. Transmit Antenna Separation Distances

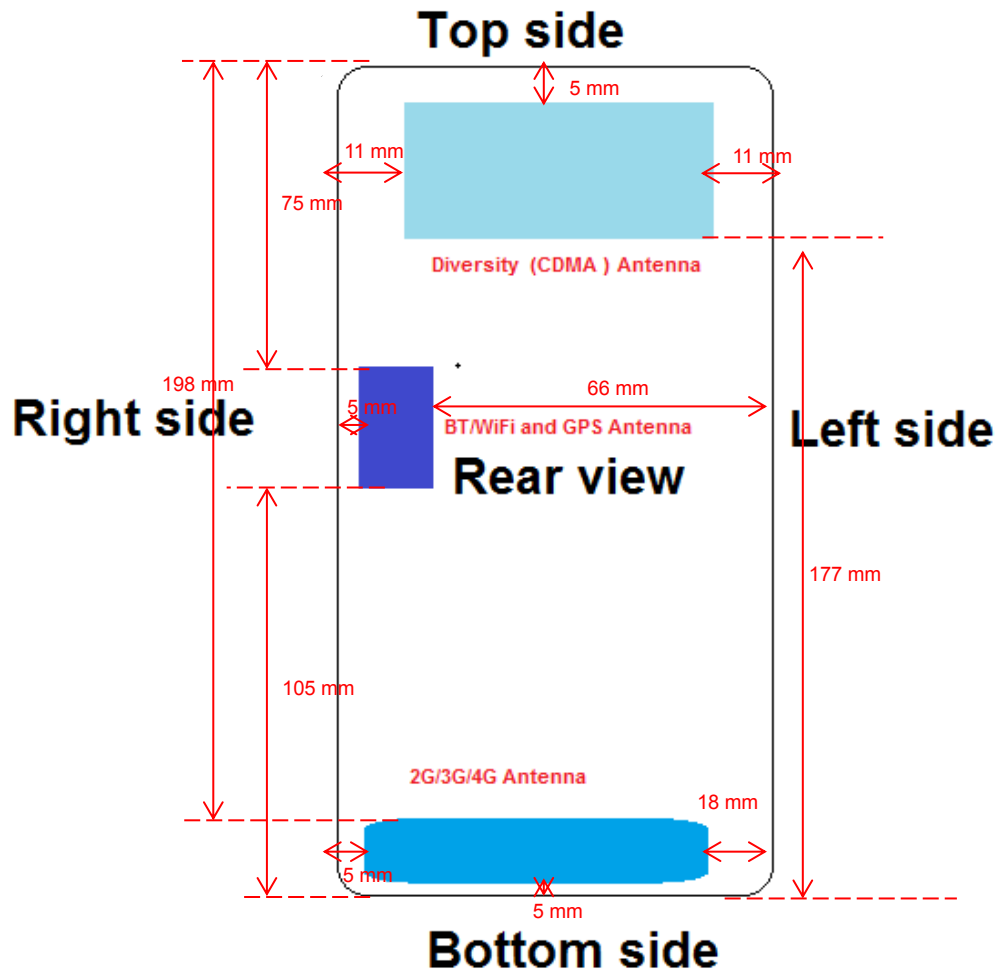

Picture 11.1 Antenna Locations

11.3. Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances \leq 50 mm are determined by:

$$\left[\frac{\text{(max. power of channel, including tune-up tolerance, mW)}}{\text{(min. test separation distance, mm)}} \right] \cdot$$

$$[\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR, where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

According to the KDB447498 appendix A, the SAR test exclusion threshold for 2450MHz at 5mm test separation distances is 10mW.

$$\frac{\text{(max. power of channel, including tune-up tolerance, mW)}}{\text{(min. test separation distance, mm)}} * \sqrt{\text{Frequency (GHz)}} \leq 3.0$$

Based on the above equation, Bluetooth SAR was not required:

Evaluation=1.254 < 3.0

Based on the above equation, WiFi SAR was required:

Evaluation=19.87 > 3.0

11.4. SAR Measurement Positions

The following SAR test exclusion Thresholds based on KDB 447498 D01 General RF Exposure Guidance v06 4.3.1

| Exposure Position | Wireless Interface | GSM | | WCDMA | | | WLAN |
|-------------------|-------------------------|---------|--------|--------|--------|--------|----------|
| | | 850 | 1900 | Band2 | Band4 | Band5 | 802.11 b |
| Exposure Position | Maximum power | 33 | 29 | 21.5 | 22.5 | 22.5 | 18 |
| | Maximum rated power(mW) | 1995.26 | 794.33 | 141.25 | 177.83 | 177.83 | 63.10 |
| | Antenna to user (mm) | 5 | 5 | 5 | 5 | 5 | 10 |
| Front view | SAR exclusion threshold | 16.27 | 10.88 | 10.88 | 10.88 | 16.27 | 19.17 |
| | SAR testing required? | Yes | Yes | Yes | Yes | Yes | Yes |
| | Antenna to user (mm) | 8 | 8 | 8 | 8 | 8 | 5 |
| Rear view | SAR exclusion threshold | 26.03 | 17.41 | 17.41 | 17.41 | 26.03 | 9.58 |
| | SAR testing required? | Yes | Yes | Yes | Yes | Yes | Yes |

| | | | | | | | |
|--------|-------------------------|---------|---------|---------|---------|---------|--------|
| Top | Antenna to user (mm) | 198 | 198 | 198 | 198 | 198 | 75 |
| | SAR exclusion threshold | 1002.67 | 1589.00 | 1589.00 | 1589.00 | 1002.67 | 346.00 |
| | SAR testing required? | No | No | No | No | No | No |
| Left | Antenna to user (mm) | 18 | 18 | 18 | 18 | 18 | 66 |
| | SAR exclusion threshold | 58.57 | 39.18 | 39.18 | 39.18 | 58.57 | 126.50 |
| | SAR testing required? | Yes | Yes | Yes | Yes | Yes | No |
| Bottom | Antenna to user (mm) | 5 | 5 | 5 | 5 | 5 | 105 |
| | SAR exclusion threshold | 16.27 | 10.88 | 10.88 | 10.88 | 16.27 | 646 |
| | SAR testing required? | Yes | Yes | Yes | Yes | Yes | No |
| Right | Antenna to user (mm) | 5 | 5 | 5 | 5 | 5 | 5 |
| | SAR exclusion threshold | 16.27 | 10.88 | 10.88 | 10.88 | 16.27 | 19.17 |
| | SAR testing required? | Yes | Yes | Yes | Yes | Yes | Yes |

| Exposure Position | Wireless Interface | CDMA | | LTE | | | |
|-------------------|-------------------------|--------|---------|---------|---------|---------|---------|
| | | BC0 | BC1 | Band2 | Band4 | Band7 | Band17 |
| Exposure Position | Maximum power | 22 | 21.5 | 23.5 | 23.5 | 21.5 | 23.5 |
| | Maximum rated power(mW) | 158.49 | 141.25 | 141.25 | 141.25 | 141.25 | 223.87 |
| Front view | Antenna to user (mm) | 35 | 35 | 5 | 5 | 5 | 5 |
| | SAR exclusion threshold | 113.89 | 76.18 | 10.88 | 10.88 | 10.88 | 16.27 |
| | SAR testing required? | Yes | Yes | Yes | Yes | Yes | Yes |
| Rear view | Antenna to user (mm) | 8 | 8 | 8 | 8 | 8 | 8 |
| | SAR exclusion threshold | 26.03 | 17.41 | 17.41 | 17.41 | 17.41 | 26.03 |
| | SAR testing required? | Yes | Yes | Yes | Yes | Yes | Yes |
| Top | Antenna to user (mm) | 5 | 5 | 198 | 198 | 198 | 198 |
| | SAR exclusion threshold | 16.27 | 10.88 | 1589.00 | 1589.00 | 1589.00 | 1002.67 |
| | SAR testing required? | Yes | Yes | No | No | No | No |
| Left | Antenna to user (mm) | 11 | 11 | 18 | 18 | 18 | 18 |
| | SAR exclusion threshold | 35.79 | 23.94 | 39.18 | 39.18 | 39.18 | 58.57 |
| | SAR testing required? | Yes | Yes | Yes | Yes | Yes | Yes |
| Bottom | Antenna to user (mm) | 177 | 177 | 5 | 5 | 5 | 5 |
| | SAR exclusion threshold | 883.67 | 1379.00 | 10.88 | 10.88 | 10.88 | 16.27 |
| | SAR testing required? | No | No | Yes | Yes | Yes | Yes |
| Right | Antenna to user (mm) | 11 | 11 | 5 | 5 | 5 | 5 |
| | SAR exclusion threshold | 35.79 | 23.94 | 10.88 | 10.88 | 10.88 | 16.27 |
| | SAR testing required? | Yes | Yes | Yes | Yes | Yes | Yes |

12. SAR Test Result

12.1 SAR Result for I18D00082-SAR01

Battery use for BA01

Table 12.1: SAR Values (GSM 850 MHz Band-Body)

| Frequency | | Mode /Band | Service /Headset | Test Position | Spacing (mm) | Figure No. | Measured average power (dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|-----------------|-----|------------|------------------|----------------|--------------|------------|------------------------------|-----------------------------|----------------|--------------------------|--------------------------|------------------|
| MHz | Ch. | | | | | | | | | | | |
| 836.6 | 190 | GPRS 4TS | Class12 | Toward Phantom | 5 | 1 | 29.51 | 30 | 1.119 | 1.13 | 1.265 | -0.19 |
| 834.2 | 128 | GPRS 4TS | Class12 | Toward Phantom | 5 | / | 29.52 | 30 | 1.117 | 1.03 | 1.150 | 0.17 |
| 848.8 | 251 | GPRS 4TS | Class12 | Toward Phantom | 5 | / | 29.52 | 30 | 1.117 | 0.957 | 1.069 | 0.05 |
| 836.6 | 190 | GPRS 4TS | Class12 | Toward Ground | 5 | / | 29.51 | 30 | 1.119 | 0.853 | 0.955 | 0.12 |
| 834.2 | 128 | GPRS 4TS | Class12 | Toward Ground | 5 | / | 29.52 | 30 | 1.117 | 0.943 | 1.053 | 0.14 |
| 848.8 | 251 | GPRS 4TS | Class12 | Toward Ground | 5 | / | 29.52 | 30 | 1.117 | 0.738 | 0.824 | 0.13 |
| 836.6 | 190 | GPRS 4TS | Class12 | Toward Left | 5 | / | 29.51 | 30 | 1.119 | 0.448 | 0.502 | 0.10 |
| 836.6 | 190 | GPRS 4TS | Class12 | Toward Right | 5 | / | 29.51 | 30 | 1.119 | 0.827 | 0.926 | -0.12 |
| 834.2 | 128 | GPRS 4TS | Class12 | Toward Right | 5 | / | 29.52 | 30 | 1.117 | 0.733 | 0.819 | -0.07 |
| 848.8 | 251 | GPRS 4TS | Class12 | Toward Right | 5 | / | 29.52 | 30 | 1.117 | 0.809 | 0.904 | -0.16 |
| 836.6 | 190 | GPRS 4TS | Class12 | Toward Bottom | 5 | / | 29.51 | 30 | 1.119 | 0.64 | 0.716 | 0.10 |
| Repeated | | | | | | | | | | | | |
| 836.6 | 190 | GPRS 4TS | Class12 | Toward Phantom | 5 | / | 29.51 | 30 | 1.119 | 1.06 | 1.187 | 0.04 |
| Frequency | | Mode /Band | Service /Headset | Test Position | Spacing (mm) | Figure No. | Measured average power (dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Power Drift (dB) |
| MHz | Ch. | | | | | | | | | | | |
| 836.6 | 190 | GPRS 4TS | Class12 | Toward Phantom | 0 | 2 | 29.51 | 30 | 1.119 | 0.994 | 1.113 | -0.09 |
| 836.6 | 190 | GPRS 4TS | Class12 | Toward Ground | 0 | / | 29.51 | 30 | 1.119 | 0.598 | 0.669 | 0.16 |

| | | | | | | | | | | | | |
|-------|-----|-------------|---------|------------------|---|---|-------|----|-------|-------|-------|-------|
| 836.6 | 190 | GPRS 4TS | Class12 | Toward Left | 0 | / | 29.51 | 30 | 1.119 | 0.32 | 0.358 | 0.08 |
| 836.6 | 190 | GPRS 4TS | Class12 | Toward Right | 0 | / | 29.51 | 30 | 1.119 | 0.924 | 1.034 | -0.14 |
| 836.6 | 190 | GPRS 4TS | Class12 | Toward Bottom | 0 | / | 29.51 | 30 | 1.119 | 0.556 | 0.622 | 0.17 |

Table 12.2: SAR Values (GSM 1900 MHz Band-Body)

| Frequency | | Mode /Band | Service /Headset | Test Position | Spacing (mm) | Figure No. | Measured average power (dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|-----------------|-----|------------|------------------|----------------|--------------|------------|------------------------------|-----------------------------|----------------|--------------------------|--------------------------|------------------|
| MHz | Ch. | | | | | | | | | | | |
| 1880 | 661 | GPRS 4TS | Class12 | Toward Phantom | 5 | / | 25.9 | 26 | 1.023 | 0.819 | 0.838 | 0.07 |
| 1850.2 | 512 | GPRS 4TS | Class12 | Toward Phantom | 5 | / | 25.96 | 26 | 1.009 | 0.803 | 0.810 | 0.03 |
| 1909.8 | 810 | GPRS 4TS | Class12 | Toward Phantom | 5 | / | 25.87 | 26 | 1.030 | 0.93 | 0.958 | -0.02 |
| 1880 | 661 | GPRS 4TS | Class12 | Toward Ground | 5 | / | 25.9 | 26 | 1.023 | 0.567 | 0.580 | 0.03 |
| 1880 | 661 | GPRS 4TS | Class12 | Toward Left | 5 | / | 25.9 | 26 | 1.023 | 0.184 | 0.188 | -0.05 |
| 1880 | 661 | GPRS 4TS | Class12 | Toward Right | 5 | / | 25.9 | 26 | 1.023 | 1.01 | 1.034 | -0.13 |
| 1850.2 | 512 | GPRS 4TS | Class12 | Toward Right | 5 | / | 25.96 | 26 | 1.009 | 0.899 | 0.907 | -0.12 |
| 1909.8 | 810 | GPRS 4TS | Class12 | Toward Right | 5 | 3 | 25.87 | 26 | 1.030 | 1.2 | 1.236 | -0.20 |
| 1880 | 661 | GPRS 4TS | Class12 | Toward Bottom | 5 | / | 25.9 | 26 | 1.023 | 0.735 | 0.752 | -0.20 |
| 1850.2 | 512 | GPRS 4TS | Class12 | Toward Bottom | 5 | / | 25.96 | 26 | 1.009 | 0.726 | 0.733 | -0.08 |
| 1909.8 | 810 | GPRS 4TS | Class12 | Toward Bottom | 5 | / | 25.87 | 26 | 1.030 | 0.806 | 0.830 | -0.11 |
| Repeated | | | | | | | | | | | | |
| 1909.8 | 810 | GPRS 4TS | Class12 | Toward Right | 5 | / | 25.87 | 26 | 1.030 | 1.15 | 1.185 | -0.11 |
| Frequency | | Mode /Band | Service /Headset | Test Position | Spacing (mm) | Figure No. | Measured average power (dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Power Drift (dB) |
| MHz | Ch. | | | | | | | | | | | |
| 1880 | 661 | GPRS 4TS | Class12 | Toward Phantom | 0 | 4 | 25.9 | 26 | 1.023 | 1.06 | 1.085 | 0.10 |
| 1880 | 661 | GPRS 4TS | Class12 | Toward Ground | 0 | / | 25.9 | 26 | 1.023 | 0.567 | 0.580 | 0.15 |
| 1880 | 661 | GPRS 4TS | Class12 | Toward Left | 0 | / | 25.9 | 26 | 1.023 | 0.11 | 0.113 | 0.12 |
| 1880 | 661 | GPRS 4TS | Class12 | Toward Right | 0 | / | 25.9 | 26 | 1.023 | 1.05 | 1.074 | -0.13 |

| | | | | | | | | | | | | |
|------|-----|-------------|---------|------------------|---|---|------|----|-------|-------|-------|------|
| 1880 | 661 | GPRS 4TS | Class12 | Toward Bottom | 0 | / | 25.9 | 26 | 1.023 | 0.748 | 0.765 | 0.16 |
|------|-----|-------------|---------|------------------|---|---|------|----|-------|-------|-------|------|

Table 12.3: SAR Values (WCDMA Band II-Body)

| Frequency | | Mode /Band | Service /Headset | Test Position | Spacing (mm) | Figure No. | Measured average power (dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|-----------------|------|---------------|---------------------|-------------------|-----------------|---------------|---------------------------------------|--------------------------------------|-------------------|--------------------------------|--------------------------------|------------------------|
| MHz | Ch. | | | | | | | | | | | |
| 1880 | 9800 | Band II | 12.2kbps RMC | Toward Phantom | 5 | / | 21.31 | 21.5 | 1.045 | 0.952 | 0.995 | 0.09 |
| 1852.4 | 9662 | Band II | 12.2kbps RMC | Toward Phantom | 5 | / | 21.44 | 21.5 | 1.014 | 0.994 | 1.008 | -0.19 |
| 1907.6 | 9938 | Band II | 12.2kbps RMC | Toward Phantom | 5 | / | 21.42 | 21.5 | 1.019 | 1.06 | 1.080 | -0.12 |
| 1880 | 9800 | Band II | 12.2kbps RMC | Toward Ground | 5 | / | 21.31 | 21.5 | 1.045 | 0.727 | 0.760 | 0.18 |
| 1880 | 9800 | Band II | 12.2kbps RMC | Toward Left | 5 | / | 21.31 | 21.5 | 1.045 | 0.201 | 0.210 | 0.10 |
| 1880 | 9800 | Band II | 12.2kbps RMC | Toward Right | 5 | 5 | 21.31 | 21.5 | 1.045 | 1.16 | 1.212 | -0.00 |
| 1852.4 | 9662 | Band II | 12.2kbps RMC | Toward Right | 5 | / | 21.44 | 21.5 | 1.014 | 1.03 | 1.044 | -0.15 |
| 1907.6 | 9938 | Band II | 12.2kbps RMC | Toward Right | 5 | / | 21.42 | 21.5 | 1.019 | 1.14 | 1.161 | 0.03 |
| 1880 | 9800 | Band II | 12.2kbps RMC | Toward Bottom | 5 | / | 21.31 | 21.5 | 1.045 | 0.757 | 0.791 | 0.11 |
| Repeated | | | | | | | | | | | | |
| 1880 | 9800 | Band II | 12.2kbps RMC | Toward Right | 5 | / | 21.31 | 21.5 | 1.045 | 1.12 | 1.170 | -0.06 |
| Frequency | | Mode /Band | Service /Headset | Test Position | Spacing (mm) | Figure No. | Measured average power (dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Power Drift (dB) |
| MHz | Ch. | | | | | | | | | | | |
| 1880 | 661 | GPRS 4TS | Class12 | Toward Phantom | 0 | / | 21.31 | 21.5 | 1.045 | 1.04 | 1.087 | 0.11 |
| 1880 | 661 | GPRS 4TS | Class12 | Toward Ground | 0 | / | 21.31 | 21.5 | 1.045 | 0.571 | 0.597 | -0.11 |
| 1880 | 661 | GPRS 4TS | Class12 | Toward Left | 0 | / | 21.31 | 21.5 | 1.045 | 0.106 | 0.111 | 0.12 |

| | | | | | | | | | | | | |
|------|-----|-------------|---------|------------------|---|---|-------|------|-------|-------|--------------|-------|
| 1880 | 661 | GPRS 4TS | Class12 | Toward Right | 0 | 6 | 21.31 | 21.5 | 1.045 | 1.07 | 1.118 | -0.11 |
| 1880 | 661 | GPRS 4TS | Class12 | Toward Bottom | 0 | / | 21.31 | 21.5 | 1.045 | 0.711 | 0.743 | -0.16 |

Table 12.4: SAR Values (WCDMA Band IV-Body)

| Frequency | | Mode /Band | Service /Headset | Test Position | Spacing (mm) | Figure No. | Measured average power (dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|-----------------|------|---------------|---------------------|-------------------|-----------------|---------------|---------------------------------------|--------------------------------------|-------------------|--------------------------------|--------------------------------|------------------------|
| MHz | Ch. | | | | | | | | | | | |
| 1732.6 | 1413 | Band IV | 12.2kbps RMC | Toward Phantom | 5 | / | 22.38 | 22.5 | 1.028 | 0.668 | 0.687 | 0.09 |
| 1732.6 | 1413 | Band IV | 12.2kbps RMC | Toward Ground | 5 | / | 22.38 | 22.5 | 1.028 | 0.995 | 1.023 | -0.19 |
| 1712.4 | 1312 | Band IV | 12.2kbps RMC | Toward Ground | 5 | / | 22.28 | 22.5 | 1.052 | 1.05 | 1.105 | 0.07 |
| 1752.6 | 1512 | Band IV | 12.2kbps RMC | Toward Ground | 5 | / | 22.2 | 22.5 | 1.072 | 0.952 | 1.020 | -0.00 |
| 1732.6 | 1413 | Band IV | 12.2kbps RMC | Toward Left | 5 | / | 22.38 | 22.5 | 1.028 | 0.15 | 0.154 | 0.11 |
| 1732.6 | 1413 | Band IV | 12.2kbps RMC | Toward Right | 5 | / | 22.38 | 22.5 | 1.028 | 0.983 | 1.011 | 0.15 |
| 1712.4 | 1312 | Band IV | 12.2kbps RMC | Toward Right | 5 | / | 22.28 | 22.5 | 1.052 | 0.968 | 1.018 | 0.14 |
| 1752.6 | 1512 | Band IV | 12.2kbps RMC | Toward Right | 5 | 7 | 22.2 | 22.5 | 1.072 | 1.06 | 1.136 | 0.18 |
| 1732.6 | 1413 | Band IV | 12.2kbps RMC | Toward Bottom | 5 | / | 22.38 | 22.5 | 1.028 | 0.755 | 0.776 | 0.15 |
| Repeated | | | | | | | | | | | | |
| 1752.6 | 1512 | Band IV | 12.2kbps RMC | Toward Right | 5 | / | 22.2 | 22.5 | 1.072 | 1.04 | 1.114 | 0.14 |
| Frequency | | Mode /Band | Service /Headset | Test Position | Spacing (mm) | Figure No. | Measured average power (dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Power Drift (dB) |
| MHz | Ch. | | | | | | | | | | | |
| 1732.6 | 1413 | Band IV | 12.2kbps RMC | Toward Phantom | 0 | / | 22.38 | 22.5 | 1.028 | 0.654 | 0.672 | 0.11 |
| 1732.6 | 1413 | Band IV | 12.2kbps RMC | Toward Ground | 0 | / | 22.38 | 22.5 | 1.028 | 0.929 | 0.955 | 0.15 |

| | | | | | | | | | | | | |
|--------|------|---------|--------------|---------------|---|---|-------|------|-------|-------|--------------|------|
| 1732.6 | 1413 | Band IV | 12.2kbps RMC | Toward Left | 0 | / | 22.38 | 22.5 | 1.028 | 0.137 | 0.141 | 0.14 |
| 1732.6 | 1413 | Band IV | 12.2kbps RMC | Toward Right | 0 | 8 | 22.38 | 22.5 | 1.028 | 0.988 | 1.016 | 0.18 |
| 1732.6 | 1413 | Band IV | 12.2kbps RMC | Toward Bottom | 0 | / | 22.38 | 22.5 | 1.028 | 0.728 | 0.748 | 0.09 |

Table 12.5: SAR Values (WCDMA Band V-Body)

| Frequency | | Mode /Band | Service /Headset | Test Position | Spacing (mm) | Figure No. | Measured average power (dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|-----------|------|------------|------------------|----------------|--------------|------------|------------------------------|-----------------------------|----------------|--------------------------|--------------------------|------------------|
| MHz | Ch. | | | | | | | | | | | |
| 836.6 | 4175 | Band V | 12.2kbps RMC | Toward Phantom | 5 | 9 | 22.2 | 22.5 | 1.072 | 0.662 | 0.709 | -0.00 |
| 836.6 | 4175 | Band V | 12.2kbps RMC | Toward Ground | 5 | / | 22.2 | 22.5 | 1.072 | 0.355 | 0.380 | 0.019 |
| 836.6 | 4175 | Band V | 12.2kbps RMC | Toward Left | 5 | / | 22.2 | 22.5 | 1.072 | 0.245 | 0.263 | 0.15 |
| 836.6 | 4175 | Band V | 12.2kbps RMC | Toward Right | 5 | / | 22.2 | 22.5 | 1.072 | 0.412 | 0.441 | 0.06 |
| 836.6 | 4175 | Band V | 12.2kbps RMC | Toward Bottom | 5 | / | 22.2 | 22.5 | 1.072 | 0.544 | 0.583 | -0.11 |
| Frequency | | Mode /Band | Service /Headset | Test Position | Spacing (mm) | Figure No. | Measured average power (dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Power Drift (dB) |
| MHz | Ch. | | | | | | | | | | | |
| 836.6 | 4175 | Band V | 12.2kbps RMC | Toward Phantom | 0 | 10 | 22.2 | 22.5 | 1.072 | 0.643 | 0.689 | -0.15 |
| 836.6 | 4175 | Band V | 12.2kbps RMC | Toward Ground | 0 | / | 22.2 | 22.5 | 1.072 | 0.389 | 0.417 | 0.05 |
| 836.6 | 4175 | Band V | 12.2kbps RMC | Toward Left | 0 | / | 22.2 | 22.5 | 1.072 | 0.172 | 0.184 | 0.15 |
| 836.6 | 4175 | Band V | 12.2kbps RMC | Toward Right | 0 | / | 22.2 | 22.5 | 1.072 | 0.516 | 0.553 | -0.13 |
| 836.6 | 4175 | Band V | 12.2kbps RMC | Toward Bottom | 0 | / | 22.2 | 22.5 | 1.072 | 0.36 | 0.386 | 0.01 |

Table 12.6: SAR Values (LTE Band 2-Body)

| Frequency | | Configuration | Test Position | Spacing (mm) | Figure No. | Measured average power (dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|-----------|-------|---------------------------------|----------------|--------------|------------|------------------------------|-----------------------------|----------------|-------------------------|-------------------------|------------------|
| MHz | Ch. | | | | | | | | | | |
| 1900 | 19100 | QPSK_20MHz_1RB_0 offset High | Toward Phantom | 5 | / | 23.46 | 23.5 | 1.009 | 1.16 | 1.171 | -0.17 |
| 1860 | 18700 | QPSK_20MHz_1RB_0 offset Low | Toward Phantom | 5 | 11 | 23.33 | 23.5 | 1.040 | 1.26 | 1.310 | 0.18 |
| 1880 | 18900 | QPSK_20MHz_1RB_0 offset Middle | Toward Phantom | 5 | / | 23.45 | 23.5 | 1.012 | 1.12 | 1.133 | 0.03 |
| 1900 | 19100 | QPSK_20MHz_1RB_0 offset High | Toward Ground | 5 | / | 23.46 | 23.5 | 1.009 | 0.832 | 0.840 | 0.12 |
| 1860 | 18700 | QPSK_20MHz_1RB_0 offset Low | Toward Ground | 5 | / | 23.33 | 23.5 | 1.040 | 0.881 | 0.916 | 0.09 |
| 1880 | 18900 | QPSK_20MHz_1RB_0 offset Middle | Toward Ground | 5 | / | 23.45 | 23.5 | 1.012 | 0.808 | 0.817 | 0.09 |
| 1900 | 19100 | QPSK_20MHz_1RB_0 offset High | Toward Left | 5 | / | 23.46 | 23.5 | 1.009 | 0.197 | 0.199 | 0.14 |
| 1900 | 19100 | QPSK_20MHz_1RB_0 offset High | Toward Right | 5 | / | 23.46 | 23.5 | 1.009 | 1.19 | 1.201 | -0.10 |
| 1860 | 18700 | QPSK_20MHz_1RB_0 offset Low | Toward Right | 5 | / | 23.33 | 23.5 | 1.040 | 1.21 | 1.258 | 0.676 |
| 1880 | 18900 | QPSK_20MHz_1RB_0 offset Middle | Toward Right | 5 | / | 23.45 | 23.5 | 1.012 | 1.16 | 1.173 | 0.15 |
| 1900 | 19100 | QPSK_20MHz_1RB_0 offset High | Toward Bottom | 5 | / | 23.46 | 23.5 | 1.009 | 0.941 | 0.950 | -0.08 |
| 1860 | 18700 | QPSK_20MHz_1RB_0 offset Low | Toward Bottom | 5 | / | 23.33 | 23.5 | 1.040 | 1 | 1.040 | 0.19 |
| 1880 | 18900 | QPSK_20MHz_1RB_0 offset Middle | Toward Bottom | 5 | / | 23.45 | 23.5 | 1.012 | 0.973 | 0.984 | 0.16 |
| 1900 | 19100 | QPSK_20MHz_50RB_0 offset High | Toward Phantom | 5 | / | 22.33 | 22.5 | 1.040 | 0.967 | 1.006 | 0.01 |
| 1860 | 18700 | QPSK_20MHz_50RB_0 offset Low | Toward Phantom | 5 | / | 22.16 | 22.5 | 1.081 | 1 | 1.081 | 0.10 |
| 1880 | 18900 | QPSK_20MHz_50RB_0 offset Middle | Toward Phantom | 5 | / | 22.25 | 22.5 | 1.059 | 0.908 | 0.962 | 0.19 |
| 1900 | 19100 | QPSK_20MHz_50RB_0 offset High | Toward Ground | 5 | / | 22.33 | 22.5 | 1.040 | 0.677 | 0.704 | 0.15 |
| 1900 | 19100 | QPSK_20MHz_50RB_0 offset High | Toward Left | 5 | / | 22.33 | 22.5 | 1.040 | 0.158 | 0.164 | 0.14 |
| 1900 | 19100 | QPSK_20MHz_50RB_0 offset High | Toward Right | 5 | / | 22.33 | 22.5 | 1.040 | 1.03 | 1.071 | 0.19 |

| | | | | | | | | | | | |
|------|-------|----------------------------------|----------------|---|---|-------|------|-------|-------|-------|------|
| 1860 | 18700 | QPSK_20MHz_50RB_0 offset Low | Toward Right | 5 | / | 22.16 | 22.5 | 1.081 | 0.985 | 1.065 | 0.10 |
| 1880 | 18900 | QPSK_20MHz_50RB_0 offset Middle | Toward Right | 5 | / | 22.25 | 22.5 | 1.059 | 1 | 1.059 | 0.17 |
| 1900 | 19100 | QPSK_20MHz_50RB_0 offset High | Toward Bottom | 5 | / | 22.33 | 22.5 | 1.040 | 0.767 | 0.798 | 0.10 |
| 1860 | 18700 | QPSK_20MHz_50RB_0 offset Low | Toward Bottom | 5 | / | 22.16 | 22.5 | 1.081 | 0.801 | 0.866 | 0.20 |
| 1880 | 18900 | QPSK_20MHz_50RB_0 offset Middle | Toward Bottom | 5 | / | 22.25 | 22.5 | 1.059 | 0.795 | 0.842 | 0.16 |
| 1880 | 18900 | QPSK_20MHz_100RB_0 offset Middle | Toward Phantom | 5 | / | 22.25 | 22.5 | 1.059 | 0.973 | 1.031 | 0.18 |
| 1880 | 18900 | QPSK_20MHz_100RB_0 offset Middle | Toward Ground | 5 | / | 22.25 | 22.5 | 1.059 | 0.675 | 0.715 | 0.17 |
| 1880 | 18900 | QPSK_20MHz_100RB_0 offset Middle | Toward Right | 5 | / | 22.25 | 22.5 | 1.059 | 1 | 1.059 | 0.17 |
| 1880 | 18900 | QPSK_20MHz_100RB_0 offset Middle | Toward Bottom | 5 | / | 22.25 | 22.5 | 1.059 | 0.783 | 0.829 | 0.13 |

Repeated

| 1860 | 18700 | QPSK_20MHz_1RB_0 offset Low | Toward Phantom | 5 | / | 23.33 | 23.5 | 1.040 | 1.26 | 1.310 | 0.17 |
|-----------|-------|-------------------------------|----------------|--------------|------------|------------------------------|-----------------------------|----------------|--------------------------|--------------------------|------------------|
| Frequency | | Configuration | Test Position | Spacing (mm) | Figure No. | Measured average power (dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Power Drift (dB) |
| MHz | Ch. | | | | | | | | | | |
| 1900 | 19100 | QPSK_20MHz_1RB_0 offset High | Toward Phantom | 0 | / | 23.46 | 23.5 | 1.009 | 1.24 | 1.251 | 0.11 |
| 1900 | 19100 | QPSK_20MHz_1RB_0 offset High | Toward Ground | 0 | / | 23.46 | 23.5 | 1.009 | 0.73 | 0.737 | 0.02 |
| 1900 | 19100 | QPSK_20MHz_1RB_0 offset High | Toward Left | 0 | / | 23.46 | 23.5 | 1.009 | 0.187 | 0.189 | 0.16 |
| 1900 | 19100 | QPSK_20MHz_1RB_0 offset High | Toward Right | 0 | 12 | 23.46 | 23.5 | 1.009 | 1.36 | 1.373 | -0.07 |
| 1900 | 19100 | QPSK_20MHz_1RB_0 offset High | Toward Bottom | 0 | / | 23.46 | 23.5 | 1.009 | 0.924 | 0.933 | -0.20 |
| 1900 | 19100 | QPSK_20MHz_50RB_0 offset High | Toward Phantom | 0 | / | 22.25 | 22.5 | 1.059 | 1.02 | 1.080 | 0.19 |
| 1900 | 19100 | QPSK_20MHz_50RB_0 offset High | Toward Ground | 0 | / | 22.25 | 22.5 | 1.059 | 0.599 | 0.634 | -0.08 |
| 1900 | 19100 | QPSK_20MHz_50RB_0 offset High | Toward Left | 0 | / | 22.25 | 22.5 | 1.059 | 0.151 | 0.160 | 0.19 |
| 1900 | 19100 | QPSK_20MHz_50RB_0 offset High | Toward Right | 0 | / | 22.25 | 22.5 | 1.059 | 1.12 | 1.186 | -0.10 |

| | | | | | | | | | | | |
|------|-------|-----------------------------------|------------------|---|---|-------|------|-------|-------|-------|-------|
| 1900 | 19100 | QPSK_20MHz_50RB_ 0 offset High | Toward Bottom | 0 | / | 22.25 | 22.5 | 1.059 | 0.754 | 0.799 | -0.19 |
|------|-------|-----------------------------------|------------------|---|---|-------|------|-------|-------|-------|-------|

Table 12.7: SAR Values (LTE Band 4-Body)

| Frequency | | Configuration | Test Position | Spacing (mm) | Figure No. | Measured average power (dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|-----------|-------|-------------------------------------|-------------------|--------------|------------|------------------------------|-----------------------------|----------------|-------------------------|-------------------------|------------------|
| MHz | Ch. | | | | | | | | | | |
| 1720 | 20050 | QPSK_20MHz_1RB_ 0 offset Low | Toward Phantom | 5 | / | 23.38 | 23.5 | 1.028 | 0.949 | 0.976 | -0.19 |
| 1732.5 | 20175 | QPSK_20MHz_1RB_ 0 offset Middle | Toward Phantom | 5 | / | 23.35 | 23.5 | 1.035 | 1.02 | 1.056 | 0.08 |
| 1745 | 20300 | QPSK_20MHz_1RB_ 0 offset High | Toward Phantom | 5 | / | 23.28 | 23.5 | 1.052 | 1.02 | 1.073 | 0.06 |
| 1720 | 20050 | QPSK_20MHz_1RB_ 0 offset Low | Toward Ground | 5 | / | 23.38 | 23.5 | 1.028 | 1.21 | 1.244 | -0.15 |
| 1732.5 | 20175 | QPSK_20MHz_1RB_ 0 offset Middle | Toward Ground | 5 | / | 23.35 | 23.5 | 1.035 | 1.14 | 1.180 | -0.17 |
| 1745 | 20300 | QPSK_20MHz_1RB_ 0 offset High | Toward Ground | 5 | / | 23.28 | 23.5 | 1.052 | 1.08 | 1.136 | -0.13 |
| 1720 | 20050 | QPSK_20MHz_1RB_ 0 offset Low | Toward Left | 5 | / | 23.38 | 23.5 | 1.028 | 0.142 | 0.146 | 0.16 |
| 1720 | 20050 | QPSK_20MHz_50RB_ 0 offset Low | Toward Right | 5 | / | 23.38 | 23.5 | 1.028 | 0.971 | 0.998 | -0.18 |
| 1732.5 | 20175 | QPSK_20MHz_50RB_ 0 offset Middle | Toward Right | 5 | / | 23.35 | 23.5 | 1.035 | 1.09 | 1.128 | 0.10 |
| 1745 | 20300 | QPSK_20MHz_50RB_ 0 offset High | Toward Right | 5 | / | 23.28 | 23.5 | 1.052 | 1.08 | 1.136 | 0.12 |
| 1720 | 20050 | QPSK_20MHz_1RB_ 0 offset Low | Toward Bottom | 5 | / | 23.38 | 23.5 | 1.028 | 0.846 | 0.870 | 0.18 |
| 1732.5 | 20175 | QPSK_20MHz_1RB_ 0 offset Middle | Toward Bottom | 5 | / | 23.35 | 23.5 | 1.035 | 0.845 | 0.875 | 0.19 |
| 1745 | 20300 | QPSK_20MHz_1RB_ 0 offset High | Toward Bottom | 5 | / | 23.28 | 23.5 | 1.052 | 0.833 | 0.876 | 0.19 |
| 1720 | 20050 | QPSK_20MHz_50RB_ 0 offset Low | Toward Phantom | 5 | / | 22.65 | 23 | 1.084 | 0.782 | 0.848 | -0.13 |
| 1732.5 | 20175 | QPSK_20MHz_50RB_ 0 offset Middle | Toward Phantom | 5 | / | 22.48 | 23 | 1.127 | 0.814 | 0.918 | 0.16 |
| 1745 | 20300 | QPSK_20MHz_50RB_ 0 offset High | Toward Phantom | 5 | / | 22.61 | 23 | 1.094 | 0.835 | 0.913 | -0.19 |
| 1720 | 20050 | QPSK_20MHz_50RB_ 0 offset Low | Toward Ground | 5 | / | 22.65 | 23 | 1.084 | 0.923 | 1.000 | 0.19 |
| 1732.5 | 20175 | QPSK_20MHz_50RB_ 0 offset Middle | Toward Ground | 5 | / | 22.48 | 23 | 1.127 | 0.873 | 0.984 | 0.18 |

| 1745 | 20300 | QPSK_20MHz_50RB_0 offset High | Toward Ground | 5 | / | 22.61 | 23 | 1.094 | 0.836 | 0.915 | 0.12 |
|-----------------|--------------|----------------------------------|----------------|--------------|------------|------------------------------|-----------------------------|----------------|--------------------------|--------------------------|------------------|
| 1720 | 20050 | QPSK_20MHz_50RB_0 offset Low | Toward Left | 5 | / | 22.65 | 23 | 1.084 | 0.119 | 0.129 | -0.12 |
| 1720 | 20050 | QPSK_20MHz_50RB_0 offset Low | Toward Right | 5 | / | 22.65 | 23 | 1.084 | 0.836 | 0.906 | 0.06 |
| 1732.5 | 20175 | QPSK_20MHz_50RB_0 offset Middle | Toward Right | 5 | / | 22.48 | 23 | 1.127 | 0.878 | 0.990 | 0.16 |
| 1745 | 20300 | QPSK_20MHz_50RB_0 offset High | Toward Right | 5 | / | 22.61 | 23 | 1.094 | 0.896 | 0.980 | 0.19 |
| 1720 | 20050 | QPSK_20MHz_50RB_0 offset Low | Toward Bottom | 5 | / | 22.65 | 23 | 1.084 | 0.69 | 0.748 | 0.15 |
| 1732.5 | 20175 | QPSK_20MHz_100RB_0 offset Middle | Toward Phantom | 5 | / | 22.46 | 23 | 1.132 | 0.7 | 0.792 | 0.19 |
| 1732.5 | 20175 | QPSK_20MHz_100RB_0 offset Middle | Toward Ground | 5 | / | 22.46 | 23 | 1.132 | 0.85 | 0.963 | 0.15 |
| 1732.5 | 20175 | QPSK_20MHz_100RB_0 offset Middle | Toward Right | 5 | / | 22.46 | 23 | 1.132 | 0.88 | 0.997 | 0.12 |
| 1732.5 | 20175 | QPSK_20MHz_100RB_0 offset Middle | Toward Bottom | 5 | / | 22.46 | 23 | 1.132 | 0.736 | 0.833 | -0.19 |
| Repeated | | | | | | | | | | | |
| 1720 | 20050 | QPSK_20MHz_1RB_0 offset Low | Toward Ground | 5 | 13 | 23.38 | 23.5 | 1.028 | 1.22 | 1.254 | 0.02 |
| Frequency | | Configuration | Test Position | Spacing (mm) | Figure No. | Measured average power (dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Power Drift (dB) |
| MHz | Ch. | | | | | | | | | | |
| 1720 | 20050 | QPSK_20MHz_1RB_0 offset Low | Toward Phantom | 0 | 14 | 23.38 | 23.5 | 1.028 | 1.74 | 1.789 | 0.12 |
| 1720 | 20050 | QPSK_20MHz_1RB_0 offset Low | Toward Ground | 0 | / | 23.38 | 23.5 | 1.028 | 1.11 | 1.141 | 0.18 |
| 1720 | 20050 | QPSK_20MHz_1RB_0 offset Low | Toward Left | 0 | / | 23.38 | 23.5 | 1.028 | 0.182 | 0.187 | 0.14 |
| 1720 | 20050 | QPSK_20MHz_1RB_0 offset Low | Toward Right | 0 | / | 23.38 | 23.5 | 1.028 | 1.25 | 1.285 | 0.20 |
| 1720 | 20050 | QPSK_20MHz_1RB_0 offset Low | Toward Bottom | 0 | / | 23.38 | 23.5 | 1.028 | 0.948 | 0.975 | -0.11 |
| 1720 | 20050 | QPSK_20MHz_50RB_0 offset Low | Toward Phantom | 0 | / | 22.65 | 23 | 1.084 | 1.44 | 1.561 | 0.19 |
| 1720 | 20050 | QPSK_20MHz_50RB_0 offset Low | Toward Ground | 0 | / | 22.65 | 23 | 1.084 | 0.818 | 0.887 | 0.09 |
| 1720 | 20050 | QPSK_20MHz_50RB_0 offset Low | Toward Left | 0 | / | 22.65 | 23 | 1.084 | 0.149 | 0.162 | 0.20 |

| | | | | | | | | | | | |
|------|-------|----------------------------------|------------------|---|---|-------|----|-------|------|-------|------|
| 1720 | 20050 | QPSK_20MHz_50RB_ 0 offset Low | Toward Right | 0 | / | 22.65 | 23 | 1.084 | 1.05 | 1.138 | 0.11 |
| 1720 | 20050 | QPSK_20MHz_50RB_ 0 offset Low | Toward Bottom | 0 | / | 22.65 | 23 | 1.084 | 0.77 | 0.835 | 0.04 |

Table 12.8: SAR Values (LTE Band 7-Body)

| Frequency | | Configuration | Test Position | Spacing (mm) | Figure No. | Measured average power (dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|-----------------|-------|--------------------------------------|-------------------|--------------|------------|------------------------------|-----------------------------|----------------|-------------------------|-------------------------|------------------|
| MHz | Ch. | | | | | | | | | | |
| 2560 | 21350 | QPSK_20MHz_1RB_ 0 offset High | Toward Phantom | 5 | / | 21.24 | 21.5 | 1.062 | 0.377 | 0.400 | 0.12 |
| 2560 | 21350 | QPSK_20MHz_1RB_ 0 offset High | Toward Ground | 5 | / | 21.24 | 21.5 | 1.062 | 0.384 | 0.408 | 0.18 |
| 2560 | 21350 | QPSK_20MHz_1RB_ 0 offset High | Toward Left | 5 | / | 21.24 | 21.5 | 1.062 | 0.0442 | 0.047 | 0.14 |
| 2560 | 21350 | QPSK_20MHz_1RB_ 0 offset High | Toward Right | 5 | / | 21.24 | 21.5 | 1.062 | 0.175 | 0.186 | 0.18 |
| 2560 | 21350 | QPSK_20MHz_1RB_ 0 offset High | Toward Bottom | 5 | / | 21.24 | 21.5 | 1.062 | 1.14 | 1.210 | -0.11 |
| 2510 | 20850 | QPSK_20MHz_1RB_ 0 offset Low | Toward Bottom | 5 | / | 21.15 | 21.5 | 1.084 | 1.08 | 1.171 | 0.18 |
| 2535 | 21100 | QPSK_20MHz_1RB_ 0 offset Middle | Toward Bottom | 5 | 15 | 21.12 | 21.5 | 1.091 | 1.15 | 1.255 | 0.17 |
| 2560 | 21350 | QPSK_20MHz_50RB_ 0 offset High | Toward Phantom | 5 | / | 19.92 | 20 | 1.019 | 0.3 | 0.306 | 0.19 |
| 2560 | 21350 | QPSK_20MHz_50RB_ 0 offset High | Toward Ground | 5 | / | 19.92 | 20 | 1.019 | 0.306 | 0.312 | 0.09 |
| 2560 | 21350 | QPSK_20MHz_50RB_ 0 offset High | Toward Left | 5 | / | 19.92 | 20 | 1.019 | 0.0361 | 0.037 | 0.20 |
| 2560 | 21350 | QPSK_20MHz_50RB_ 0 offset High | Toward Right | 5 | / | 19.92 | 20 | 1.019 | 0.137 | 0.140 | 0.11 |
| 2560 | 21350 | QPSK_20MHz_50RB_ 0 offset High | Toward Bottom | 5 | / | 19.92 | 20 | 1.019 | 0.926 | 0.943 | 0.04 |
| 2510 | 20850 | QPSK_20MHz_50RB_ 0 offset High | Toward Bottom | 5 | / | 19.87 | 20 | 1.030 | 0.655 | 0.675 | 0.19 |
| 2535 | 21100 | QPSK_20MHz_50RB_ 0 offset High | Toward Bottom | 5 | / | 19.89 | 20 | 1.026 | 0.934 | 0.958 | 0.09 |
| 2535 | 21100 | QPSK_20MHz_100RB_ 0 offset Middle | Toward Bottom | 5 | / | 19.82 | 20 | 1.042 | 0.813 | 0.847 | 0.06 |
| Repeated | | | | | | | | | | | |

| | | | | | | | | | | | |
|------|-------|------------------------------------|------------------|---|---|-------|------|-------|------|-------|------|
| 2535 | 21100 | QPSK_20MHz_1RB_ 0 offset Middle | Toward Bottom | 5 | / | 21.12 | 21.5 | 1.091 | 1.12 | 1.222 | 0.12 |
|------|-------|------------------------------------|------------------|---|---|-------|------|-------|------|-------|------|

| Frequency | | Configuration | Test Position | Spacing (mm) | Figure No. | Measured average power (dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(10g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|-----------|-------|-----------------------------------|-------------------|--------------|------------|------------------------------|-----------------------------|----------------|--------------------------|-------------------------|------------------|
| MHz | Ch. | | | | | | | | | | |
| 2560 | 21350 | QPSK_20MHz_1RB_ 0 offset High | Toward Phantom | 0 | / | 21.24 | 21.5 | 1.062 | 0.406 | 0.431 | 0.09 |
| 2560 | 21350 | QPSK_20MHz_1RB_ 0 offset High | Toward Ground | 0 | / | 21.24 | 21.5 | 1.062 | 0.365 | 0.388 | 0.03 |
| 2560 | 21350 | QPSK_20MHz_1RB_ 0 offset High | Toward Left | 0 | / | 21.24 | 21.5 | 1.062 | 0.0471 | 0.050 | -0.02 |
| 2560 | 21350 | QPSK_20MHz_1RB_ 0 offset High | Toward Right | 0 | / | 21.24 | 21.5 | 1.062 | 0.12 | 0.127 | 0.11 |
| 2560 | 21350 | QPSK_20MHz_1RB_ 0 offset High | Toward Bottom | 0 | 16 | 21.24 | 21.5 | 1.062 | 1.17 | 1.242 | -0.19 |
| 2560 | 21350 | QPSK_20MHz_50RB_ 0 offset High | Toward Phantom | 0 | / | 19.92 | 20 | 1.019 | 0.324 | 0.330 | 0.03 |
| 2560 | 21350 | QPSK_20MHz_50RB_ 0 offset High | Toward Ground | 0 | / | 19.92 | 20 | 1.019 | 0.29 | 0.295 | -0.02 |
| 2560 | 21350 | QPSK_20MHz_50RB_ 0 offset High | Toward Left | 0 | / | 19.92 | 20 | 1.019 | 0.0378 | 0.039 | 0.11 |
| 2560 | 21350 | QPSK_20MHz_50RB_ 0 offset High | Toward Right | 0 | / | 19.92 | 20 | 1.019 | 0.0955 | 0.097 | 0.13 |
| 2560 | 21350 | QPSK_20MHz_50RB_ 0 offset High | Toward Bottom | 0 | / | 19.92 | 20 | 1.019 | 0.952 | 0.970 | -0.02 |

Table 12.9: SAR Values (LTE Band 17-Body)

| Frequency | | Configuration | Test Position | Spacing (mm) | Figure No. | Measured average power (dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|-----------|-------|-------------------------------------|-------------------|--------------|------------|------------------------------|-----------------------------|----------------|-------------------------|-------------------------|------------------|
| MHz | Ch. | | | | | | | | | | |
| 710 | 23790 | QPSK_10MHz_1RB_ 25 offset Middle | Toward Phantom | 5 | 17 | 23.28 | 23.5 | 1.052 | 0.186 | 0.196 | -0.02 |
| 710 | 23790 | QPSK_10MHz_1RB_ 25 offset Middle | Toward Ground | 5 | / | 23.28 | 23.5 | 1.052 | 0.152 | 0.160 | 0.17 |
| 710 | 23790 | QPSK_10MHz_1RB_ 25 offset Middle | Toward Left | 5 | / | 23.28 | 23.5 | 1.052 | 0.068 | 0.072 | 0.17 |
| 710 | 23790 | QPSK_10MHz_1RB_ 25 offset Middle | Toward Right | 5 | / | 23.28 | 23.5 | 1.052 | 0.12 | 0.126 | 0.13 |

| 710 | 23790 | QPSK_10MHz_1RB_25 offset Middle | Toward Bottom | 5 | / | 23.28 | 23.5 | 1.052 | 0.174 | 0.183 | -0.12 |
|-----------|-------|----------------------------------|----------------|--------------|------------|------------------------------|-----------------------------|----------------|--------------------------|--------------------------|------------------|
| 710 | 23790 | QPSK_10MHz_25RB_13 offset Middle | Toward Phantom | 5 | / | 22.37 | 22.5 | 1.030 | 0.154 | 0.159 | 0.05 |
| 710 | 23790 | QPSK_10MHz_25RB_13 offset Middle | Toward Ground | 5 | / | 22.37 | 22.5 | 1.030 | 0.126 | 0.130 | 0.13 |
| 710 | 23790 | QPSK_10MHz_25RB_13 offset Middle | Toward Left | 5 | / | 22.37 | 22.5 | 1.030 | 0.055 | 0.057 | 0.13 |
| 710 | 23790 | QPSK_10MHz_25RB_13 offset Middle | Toward Right | 5 | / | 22.37 | 22.5 | 1.030 | 0.098 | 0.101 | 0.02 |
| 710 | 23790 | QPSK_10MHz_25RB_13 offset Middle | Toward Bottom | 5 | / | 22.37 | 22.5 | 1.030 | 0.144 | 0.148 | -0.15 |
| Frequency | | Configuration | Test Position | Spacing (mm) | Figure No. | Measured average power (dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Power Drift (dB) |
| MHz | Ch. | | | | | | | | | | |
| 710 | 23790 | QPSK_10MHz_1RB_25 offset Middle | Toward Phantom | 0 | / | 23.28 | 23.5 | 1.052 | 0.231 | 0.243 | -0.01 |
| 710 | 23790 | QPSK_10MHz_1RB_25 offset Middle | Toward Ground | 0 | 18 | 23.28 | 23.5 | 1.052 | 0.231 | 0.243 | 0.12 |
| 710 | 23790 | QPSK_10MHz_1RB_25 offset Middle | Toward Left | 0 | / | 23.28 | 23.5 | 1.052 | 0.049 | 0.052 | -0.14 |
| 710 | 23790 | QPSK_10MHz_1RB_25 offset Middle | Toward Right | 0 | / | 23.28 | 23.5 | 1.052 | 0.162 | 0.170 | -0.05 |
| 710 | 23790 | QPSK_10MHz_1RB_25 offset Middle | Toward Bottom | 0 | / | 23.28 | 23.5 | 1.052 | 0.231 | 0.243 | -0.12 |
| 710 | 23790 | QPSK_10MHz_25RB_13 offset Middle | Toward Phantom | 0 | / | 22.37 | 22.5 | 1.030 | 0.187 | 0.193 | 0.12 |
| 710 | 23790 | QPSK_10MHz_25RB_13 offset Middle | Toward Ground | 0 | / | 22.37 | 22.5 | 1.030 | 0.188 | 0.194 | 0.15 |
| 710 | 23790 | QPSK_10MHz_25RB_13 offset Middle | Toward Left | 0 | / | 22.37 | 22.5 | 1.030 | 0.039 | 0.040 | 0.02 |
| 710 | 23790 | QPSK_10MHz_25RB_13 offset Middle | Toward Right | 0 | / | 22.37 | 22.5 | 1.030 | 0.132 | 0.136 | 0.03 |
| s710 | 23790 | QPSK_10MHz_25RB_13 offset Middle | Toward Bottom | 0 | / | 22.37 | 22.5 | 1.030 | 0.19 | 0.196 | -0.18 |

Table 12.10: SAR Values (CDMA BC0-Body)

| Frequency | | Mode /Band | Service /Headset | Test Position | Spacing (mm) | Figure No. | Measured average power (dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|-----------------|------|------------|------------------|----------------|--------------|------------|------------------------------|-----------------------------|----------------|-------------------------|-------------------------|------------------|
| MHz | Ch. | | | | | | | | | | | |
| 836.52 | 384 | BC0 | 1xEVDO | Toward Phantom | 5 | / | 21.85 | 22 | 1.035 | 0.169 | 0.175 | -0.18 |
| 836.52 | 384 | BC0 | 1xEVDO | Toward Ground | 5 | / | 21.85 | 22 | 1.035 | 1.0 | 1.035 | -0.09 |
| 824.7 | 1013 | BC0 | 1xEVDO | Toward Ground | 5 | 19 | 21.74 | 22 | 1.062 | 1.17 | 1.242 | -0.07 |
| 848.31 | 777 | BC0 | 1xEVDO | Toward Ground | 5 | / | 21.82 | 22 | 1.042 | 0.932 | 0.971 | -0.08 |
| 836.52 | 384 | BC0 | 1xEVDO | Toward Left | 5 | / | 21.85 | 22 | 1.035 | 0.176 | 0.182 | 0.16 |
| 836.52 | 384 | BC0 | 1xEVDO | Toward Right | 5 | / | 21.85 | 22 | 1.035 | 0.0202 | 0.021 | 0.18 |
| 836.52 | 384 | BC0 | 1xEVDO | Toward Top | 5 | / | 21.85 | 22 | 1.035 | 0.0369 | 0.038 | -0.19 |
| Repeated | | | | | | | | | | | | |
| 824.7 | 1013 | BC0 | 1xEVDO | Toward Ground | 5 | / | 21.74 | 22 | 1.062 | 1.16 | 1.232 | -0.12 |

| Frequency | | Mode /Band | Service /Headset | Test Position | Spacing (mm) | Figure No. | Measured average power (dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Power Drift (dB) |
|-----------|-----|------------|------------------|----------------|--------------|------------|------------------------------|-----------------------------|----------------|--------------------------|--------------------------|------------------|
| MHz | Ch. | | | | | | | | | | | |
| 836.52 | 384 | BC0 | 1xEVDO | Toward Phantom | 0 | / | 21.85 | 22 | 1.035 | 0.216 | 0.224 | 0.11 |
| 836.52 | 384 | BC0 | 1xEVDO | Toward Ground | 0 | 20 | 21.85 | 22 | 1.035 | 1.01 | 1.045 | -0.12 |
| 836.52 | 384 | BC0 | 1xEVDO | Toward Left | 0 | / | 21.85 | 22 | 1.035 | 0.219 | 0.227 | -0.01 |
| 836.52 | 384 | BC0 | 1xEVDO | Toward Right | 0 | / | 21.85 | 22 | 1.035 | 0.0993 | 0.103 | -0.18 |
| 836.52 | 384 | BC0 | 1xEVDO | Toward Top | 0 | / | 21.85 | 22 | 1.035 | 0.108 | 0.112 | 0.07 |

Table 12.11: SAR Values (CDMA BC1-Body)

| Frequency | | Mode /Band | Service /Headset | Test Position | Spacing (mm) | Figure No. | Measured average power (dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|-----------------|------|------------|------------------|----------------|--------------|------------|------------------------------|-----------------------------|----------------|-------------------------|-------------------------|------------------|
| MHz | Ch. | | | | | | | | | | | |
| 1880 | 600 | BC1 | 1xEVDO | Toward Phantom | 5 | / | 21.20 | 21.5 | 1.072 | 0.0893 | 0.096 | -0.14 |
| 1880 | 600 | BC1 | 1xEVDO | Toward Ground | 5 | / | 21.20 | 21.5 | 1.072 | 1.09 | 1.168 | 0.14 |
| 1851.25 | 25 | BC1 | 1xEVDO | Toward Ground | 5 | 21 | 21.27 | 21.5 | 1.054 | 1.14 | 1.202 | 0.12 |
| 1908.75 | 1175 | BC1 | 1xEVDO | Toward Ground | 5 | / | 20.97 | 21.5 | 1.130 | 0.923 | 1.043 | 0.12 |
| 1880 | 600 | BC1 | 1xEVDO | Toward Left | 5 | / | 21.20 | 21.5 | 1.072 | 0.292 | 0.313 | 0.14 |
| 1880 | 600 | BC1 | 1xEVDO | Toward Right | 5 | / | 21.20 | 21.5 | 1.072 | 0.123 | 0.132 | 0.15 |
| 1880 | 600 | BC1 | 1xEVDO | Toward Top | 5 | / | 21.20 | 21.5 | 1.072 | 0.206 | 0.221 | 0.18 |
| Repeated | | | | | | | | | | | | |
| 1851.25 | 25 | BC1 | 1xEVDO | Toward Ground | 5 | / | 21.27 | 21.5 | 1.054 | 1.06 | 1.118 | 0.11 |

| Frequency | | Mode /Band | Service /Headset | Test Position | Spacing (mm) | Figure No. | Measured average power (dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Power Drift (dB) |
|-----------|-----|------------|------------------|----------------|--------------|------------|------------------------------|-----------------------------|----------------|--------------------------|--------------------------|------------------|
| MHz | Ch. | | | | | | | | | | | |
| 1880 | 600 | BC1 | 1xEVDO | Toward Phantom | 0 | / | 21.20 | 21.5 | 1.072 | 0.0743 | 0.080 | 0.00 |
| 1880 | 600 | BC1 | 1xEVDO | Toward Ground | 0 | 22 | 21.20 | 21.5 | 1.072 | 1.06 | 1.136 | 0.13 |
| 1880 | 600 | BC1 | 1xEVDO | Toward Left | 0 | / | 21.20 | 21.5 | 1.072 | 0.26 | 0.279 | 0.12 |
| 1880 | 600 | BC1 | 1xEVDO | Toward Right | 0 | / | 21.20 | 21.5 | 1.072 | 0.0883 | 0.095 | 0.09 |
| 1880 | 600 | BC1 | 1xEVDO | Toward Top | 0 | / | 21.20 | 21.5 | 1.072 | 0.168 | 0.180 | 0.15 |

Table 12.12 SAR Values (Wi-Fi 802.11b - Body)

| Frequency | | Mode /Band | Service /Headset | Test Position | Spacing (mm) | Figure No. | Measured average power (dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|-----------|-----|------------|------------------|----------------|--------------|------------|------------------------------|-----------------------------|----------------|--------------------------|--------------------------|------------------|
| MHz | Ch. | | | | | | | | | | | |
| 2412 | 1 | Wi-Fi 2450 | 802.11b | Toward Phantom | 5 | / | 17.71 | 18 | 1.069 | 0.059 | 0.063 | 0.01 |
| 2412 | 1 | Wi-Fi 2450 | 802.11b | Toward Ground | 5 | / | 17.71 | 18 | 1.069 | 0.0267 | 0.029 | 0.17 |
| 2412 | 1 | Wi-Fi 2450 | 802.11b | Toward Left | 5 | / | 17.71 | 18 | 1.069 | 0.0269 | 0.029 | 0.19 |
| 2412 | 1 | Wi-Fi 2450 | 802.11b | Toward Right | 5 | 23 | 17.71 | 18 | 1.069 | 0.198 | 0.212 | -0.02 |
| 2412 | 1 | Wi-Fi 2450 | 802.11b | Toward Top | 5 | / | 17.71 | 18 | 1.069 | 0.0293 | 0.031 | 0.09 |
| Frequency | | Mode /Band | Service /Headset | Test Position | Spacing (mm) | Figure No. | Measured average power (dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Power Drift (dB) |
| MHz | Ch. | | | | | | | | | | | |
| 2412 | 1 | Wi-Fi 2450 | 802.11b | Toward Phantom | 0 | / | 17.71 | 18 | 1.069 | 0.0314 | 0.034 | 0.01 |
| 2412 | 1 | Wi-Fi 2450 | 802.11b | Toward Ground | 0 | / | 17.71 | 18 | 1.069 | 0.02 | 0.021 | 0.16 |
| 2412 | 1 | Wi-Fi 2450 | 802.11b | Toward Left | 0 | / | 17.71 | 18 | 1.069 | 0.0151 | 0.016 | 0.12 |
| 2412 | 1 | Wi-Fi 2450 | 802.11b | Toward Right | 0 | 24 | 17.71 | 18 | 1.069 | 0.274 | 0.293 | -0.01 |
| 2412 | 1 | Wi-Fi 2450 | 802.11b | Toward Top | 0 | / | 17.71 | 18 | 1.069 | 0.0212 | 0.023 | 0.09 |

Battery use for BB02
Table 12.13: SAR Values (LTE Band 2-Body)

| Frequency | | Configuration | Test Position | Spacing (mm) | Figure No. | Measured average power (dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|-----------|-------|-----------------------------|----------------|--------------|------------|------------------------------|-----------------------------|----------------|-------------------------|-------------------------|------------------|
| MHz | Ch. | | | | | | | | | | |
| 1860 | 18700 | QPSK_20MHz_1RB_0 offset Low | Toward Phantom | 5 | / | 23.33 | 23.5 | 1.040 | 1.23 | 1.279 | 0.07 |

Table 12.14: SAR Values (LTE Band 4-Body)

| | | | | | | | | | | | |
|------|-------|-----------------------------|---------------|---|---|-------|------|-------|------|-------|------|
| 1720 | 20050 | QPSK_20MHz_1RB_0 offset Low | Toward Ground | 0 | / | 23.38 | 23.5 | 1.028 | 1.19 | 1.223 | 0.02 |
|------|-------|-----------------------------|---------------|---|---|-------|------|-------|------|-------|------|

12.2 SAR Result for I19D00088-SAR01

Table 12.15: SAR Values

| Test Position | Band | Mode | Channel | Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Power Drift (dB) | Limit of 1gSAR 1.6 W/kg (mW/g) | | | Figure No. |
|--------------------------------|--------------|-------------------------------|---------|-----------------|---------------|----------------------|------------------|---------------------------------|----------------|--------------|------------|
| | | | | | | | | Measured SAR1g | Scaling Factor | Report SAR1g | |
| Body SAR (Distance 5mm) | | | | | | | | | | | |
| Phantom Side | GSM850 | GPRS 4TS | 190 | 836.6 | 30 | 29.51 | -0.08 | 0.674 | 1.12 | 0.755 | 1 |
| Right Edge | GSM1900 | GPRS 4TS | 661 | 1880 | 26 | 25.9 | 0.11 | 0.814 | 1.02 | 0.833 | / |
| Right Edge | GSM1900 | GPRS 4TS | 512 | 1850.2 | 26 | 25.96 | 0.05 | 0.724 | 1.01 | 0.731 | / |
| Right Edge | GSM1900 | GPRS 4TS | 810 | 1909.8 | 26 | 25.87 | -0.01 | 1.020 | 1.03 | 1.051 | 3 |
| Right Edge | WCDMA Band 2 | RMC12.2k | 9400 | 1880 | 21.5 | 21.31 | 0.14 | 0.842 | 1.04 | 0.880 | / |
| Right Edge | WCDMA Band 2 | RMC12.2k | 9262 | 1852.4 | 21.5 | 21.44 | 0.19 | 0.801 | 1.01 | 0.812 | / |
| Right Edge | WCDMA Band 2 | RMC12.2k | 9538 | 1907.6 | 21.5 | 21.42 | 0.14 | 0.866 | 1.02 | 0.882 | 5 |
| Right Edge | WCDMA Band 4 | RMC12.2k | 1413 | 1732.6 | 22.5 | 22.38 | -0.03 | 0.691 | 1.03 | 0.710 | / |
| Right Edge | WCDMA Band 4 | RMC12.2k | 1312 | 1712.4 | 22.5 | 22.28 | 0.01 | 0.677 | 1.05 | 0.712 | / |
| Right Edge | WCDMA Band 4 | RMC12.2k | 1512 | 1752.6 | 22.5 | 22.2 | 0.01 | 0.794 | 1.07 | 0.851 | 7 |
| Phantom Side | WCDMA Band 5 | RMC12.2k | 4175 | 836.6 | 22.2 | 22.5 | -0.18 | 0.237 | 0.93 | 0.221 | 9 |
| Phantom Side | LTE Band 2 | QPSK_20MHz Low 1RB Ooffset | 18700 | 1860 | 23.5 | 23.33 | 0.09 | 0.566 | 1.04 | 0.589 | 11 |
| Ground Side | LTE Band 4 | QPSK_20MHz Low 1RB Ooffset | 20050 | 1720 | 23.5 | 23.38 | 0.10 | 0.635 | 1.03 | 0.653 | 13 |
| Bottom Edge | LTE Band 7 | QPSK_20MHz Middle 1RB Ooffset | 21100 | 2535 | 21.5 | 21.24 | -0.15 | 1.160 | 1.06 | 1.232 | / |
| Bottom Edge | LTE Band 7 | QPSK_20MHz Low 1RB Ooffset | 20850 | 2510 | 21.5 | 21.15 | -0.13 | 1.130 | 1.08 | 1.225 | / |
| Bottom Edge | LTE Band 7 | QPSK_20MHz High 1RB Ooffset | 21350 | 2560 | 21.5 | 21.12 | 0.11 | 1.170 | 1.09 | 1.277 | 15 |
| Phantom Side | LTE Band 17 | QPSK_10MHz Middle 1RB Ooffset | 23790 | 710 | 23.5 | 23.28 | -0.09 | 0.142 | 1.05 | 0.149 | 17 |
| Ground Side | CDMA BC0 | 1XEVD0 | 1013 | 824.7 | 22 | 21.74 | -0.07 | 0.480 | 1.06 | 0.510 | 19 |
| Ground Side | CDMA BC1 | 1XEVD0 | 25 | 1851.25 | 21.5 | 21.27 | -0.07 | 0.507 | 1.05 | 0.535 | 21 |
| Right Edge | WIFI 2.4G | 802.11b | 1 | 2412 | 18 | 17.71 | 0.05 | 0.245 | 1.07 | 0.262 | 23 |
| Right Edge | WIFI 5G | 802.11n | 151 | 5755 | 18 | 17.81 | 0.06 | 0.298 | 1.04 | 0.311 | 25 |
| Repeated | | | | | | | | | | | |
| Right Edge | GSM1900 | GPRS 4TS | 810 | 1909.8 | 26 | 25.87 | 0.10 | 1.020 | 1.03 | 1.051 | / |
| Ground Side | WCDMA Band 2 | RMC12.2k | 9538 | 1907.6 | 21.5 | 21.42 | 0.11 | 0.863 | 1.02 | 0.879 | / |
| Bottom Edge | LTE Band 7 | QPSK_20MHz High 1RB Ooffset | 21350 | 2560 | 21.5 | 21.12 | 0.18 | 1.170 | 1.09 | 1.277 | / |
| Test Position | Band | Mode | Channel | Frequency (MHz) | Tune-up (dBm) | Measured power (dBm) | Power Drift (dB) | Limit of 10gSAR 4.0 W/kg (mW/g) | | | Figure No. |
| Limb SAR (Distance 0mm) | | | | | | | | | | | |
| Phantom Side | GSM850 | GPRS 4TS | 190 | 836.6 | 30 | 29.51 | -0.06 | 1.59 | 1.12 | 1.780 | 2 |
| Phantom Side | GSM1900 | GPRS 4TS | 661 | 1880 | 26 | 25.9 | -0.14 | 1.03 | 1.02 | 1.054 | 4 |
| Right Edge | WCDMA Band 2 | RMC12.2k | 9400 | 1880 | 21.5 | 21.31 | 0.06 | 0.93 | 1.04 | 0.972 | 6 |
| Right Edge | WCDMA Band 4 | RMC12.2k | 1413 | 1732.6 | 22.5 | 22.38 | -0.04 | 0.86 | 1.03 | 0.884 | 8 |
| Phantom Side | WCDMA Band 5 | RMC12.2k | 4175 | 836.6 | 22.2 | 22.5 | 0.01 | 0.593 | 0.93 | 0.553 | 10 |
| Right Edge | LTE Band 2 | QPSK_20MHz High 1RB Ooffset | 19100 | 1900 | 23.5 | 23.46 | 0.12 | 1.29 | 1.01 | 1.302 | 12 |
| Phantom Side | LTE Band 4 | QPSK_20MHz Low 1RB Ooffset | 20050 | 1720 | 23.5 | 23.38 | 0.10 | 1.03 | 1.03 | 1.059 | 14 |
| Bottom Edge | LTE Band 7 | QPSK_20MHz High 1RB Ooffset | 18900 | 1880 | 21.5 | 21.12 | 0.12 | 1.19 | 1.09 | 1.299 | 16 |
| Ground Side | LTE Band 17 | QPSK_10MHz Middle 1RB Ooffset | 23790 | 710 | 23.5 | 23.28 | 0.17 | 0.284 | 1.05 | 0.299 | 18 |
| Ground Side | CDMA BC0 | 1XEVD0 | 384 | 836.52 | 22 | 21.74 | 0.07 | 0.41 | 1.06 | 0.435 | 20 |
| Ground Side | CDMA BC1 | 1XEVD0 | 600 | 1880 | 21.5 | 21.27 | 0.09 | 0.419 | 1.05 | 0.442 | 22 |
| Right Edge | WIFI 2.4G | 802.11b | 1 | 2412 | 18 | 17.71 | -0.10 | 0.272 | 1.07 | 0.291 | 24 |
| Right Edge | WIFI 5G | 802.11n | 38 | 5190 | 18.5 | 18.09 | -0.10 | 0.125 | 1.10 | 0.137 | 26 |

13. Evaluation of Simultaneous

The sample has four antennas. One is main antenna for GSM/WCDMA/LTE, and the other is for WiFi/BT/GPS and Diversity Antenna (CDMA) and NFC Antenna. Because the EUT not support hotspot mode ,so wifi and WWAN simultaneous transmission is not support.

Table13.1 Simultaneous transmission SAR

| Standalone SAR for 2G(W/Kg) | | | | |
|-----------------------------|--------------|--------------------|----------|--------------------|
| Test Position | | GSM 850 | GSM 1900 | Highest SAR |
| Body 5mm | Phantom Side | 1.265 | 0.958 | 1.265 |
| | Ground Side | 1.053 | 0.580 | 1.053 |
| | Left Side | 0.502 | 0.188 | 0.502 |
| | Right Side | 0.926 | 1.236 | 1.236 |
| | Bottom Side | 0.716 | 0.830 | 0.830 |
| | Top Side | - | - | - |
| Body 0mm | Phantom Side | 1.780 (Current) | 1.085 | 1.780 (Current) |
| | Ground Side | 0.669 | 0.580 | 0.669 |
| | Left Side | 0.358 | 0.113 | 0.358 |
| | Right Side | 1.034 | 1.074 | 1.074 |
| | Bottom Side | 0.622 | 0.765 | 0.765 |
| | Top Side | - | - | - |

| Standalone SAR for 3G (W/Kg) | | | | | |
|------------------------------|--------------|------------------|------------------|-----------------|-------------|
| Test Position | | WCDMA Band II | WCDMA Band IV | WCDMA Band V | Highest SAR |
| Body 5mm | Phantom Side | 1.080 | 0.687 | 0.709 | 1.080 |
| | Ground Side | 0.760 | 1.105 | 0.380 | 1.105 |
| | Left Side | 0.210 | 0.154 | 0.263 | 0.263 |
| | Right Side | 1.212 | 1.136 | 0.441 | 1.212 |
| | Bottom Side | 0.791 | 0.776 | 0.583 | 0.791 |
| | Top Side | - | - | - | - |
| Body 0mm | Phantom Side | 1.087 | 0.672 | 0.689 | 1.087 |

| | | | | | |
|--|-------------|-------|-------|-------|-------|
| | Ground Side | 0.597 | 0.955 | 0.417 | 0.955 |
| | Left Side | 0.111 | 0.141 | 0.184 | 0.184 |
| | Right Side | 1.118 | 1.016 | 0.553 | 1.118 |
| | Bottom Side | 0.743 | 0.748 | 0.386 | 0.748 |
| | Top Side | - | - | - | - |

| Standalone SAR for 4G (W/Kg) | | | | | | |
|------------------------------|--------------|--------------------|---------------|--------------------|--------------------|--------------------|
| Test Position | | LTE Band 2 | LTE Band 4 | LTE Band 7 | LTE Band 17 | Highest SAR |
| Body 5mm | Phantom Side | 1.310 | 1.073 | 0.400 | 0.196 | 1.310 |
| | Ground Side | 0.916 | 1.254 | 0.408 | 0.160 | 1.254 |
| | Left Side | 0.199 | 0.146 | 0.047 | 0.072 | 0.199 |
| | Right Side | 1.258 | 1.136 | 0.186 | 0.126 | 1.136 |
| | Bottom Side | 1.040 | 0.876 | 1.277 (Current) | 0.183 | 1.277 (Current) |
| | Top Side | - | - | - | - | - |
| Body 0mm | Phantom Side | 1.780 (Current) | 1.789 | 0.431 | 0.243 | 1.789 |
| | Ground Side | 0.737 | 1.141 | 0.388 | 0.299 (Current) | 1.141 |
| | Left Side | 0.189 | 0.187 | 0.050 | 0.052 | 0.189 |
| | Right Side | 1.373 | 1.285 | 0.127 | 0.170 | 1.373 |
| | Bottom Side | 0.933 | 0.975 | 1.299 (Current) | 0.243 | 1.299 (Current) |
| | Top Side | - | - | - | - | - |

| Standalone SAR for CDMA(W/Kg) | | | | |
|-------------------------------|--------------|-------|-------|-------------|
| Test Position | | BC0 | BC1 | Highest SAR |
| Body 5mm | Phantom Side | 0.175 | 0.096 | 0.175 |
| | Ground Side | 1.242 | 1.202 | 1.242 |
| | Left Side | 0.182 | 0.313 | 0.313 |
| | Right Side | 0.021 | 0.132 | 0.132 |
| | Bottom Side | -- | -- | -- |
| | Top Side | 0.038 | 0.221 | 0.221 |
| Body 0mm | Phantom Side | 0.224 | 0.080 | 0.224 |
| | Ground Side | 1.045 | 1.136 | 1.136 |
| | Left Side | 0.227 | 0.279 | 0.279 |
| | Right Side | 0.103 | 0.095 | 0.103 |
| | Bottom Side | -- | -- | -- |
| | Top Side | 0.112 | 0.180 | 0.180 |

| Transmission SAR(W/Kg) | | | | | | | | |
|------------------------|--------------|-------|-------|-------|-----------|-------|-------|-------|
| Test Position | | 2G | 3G | 4G | 2.4G WIFI | CDMA | BT | SUM |
| Body 5mm | Phantom Side | 1.265 | 1.080 | 1.310 | 0.063 | 0.175 | 0.167 | 1.477 |
| | Ground Side | 1.053 | 1.105 | 1.254 | 0.029 | 1.242 | 0.167 | 1.421 |
| | Left Side | 0.502 | 0.263 | 0.199 | 0.029 | 0.313 | 0.167 | 0.669 |
| | Right Side | 1.236 | 1.212 | 1.136 | 0.262 | 0.132 | 0.167 | 1.403 |
| | Bottom Side | 0.830 | 0.791 | 1.277 | -- | -- | 0.167 | 1.444 |
| | Top Side | -- | -- | -- | 0.031 | 0.221 | 0.167 | 0.388 |
| Body 0mm | Phantom Side | 1.113 | 1.087 | 1.789 | 0.034 | 0.224 | 0.067 | 1.856 |
| | Ground Side | 0.669 | 0.955 | 1.141 | 0.021 | 1.136 | 0.067 | 1.208 |
| | Left Side | 0.358 | 0.184 | 0.189 | 0.016 | 0.279 | 0.067 | 0.425 |
| | Right Side | 1.074 | 1.118 | 1.373 | 0.293 | 0.103 | 0.067 | 1.44 |
| | Bottom Side | 0.765 | 0.748 | 1.299 | -- | -- | 0.067 | 1.366 |
| | Top Side | -- | -- | -- | 0.023 | 0.180 | 0.067 | 0.247 |

According to the conducted power measurement result, we can draw the conclusion that: stand-alone SAR for WiFi should be performed. Then, simultaneous transmission SAR for BT is considered with measurement results of GSM/WCDMA/LTE and BT. According to the above table,

the sum of reported SAR values for GSM/WCDMA/LTE/CDMA and BT 1.6W/kg for 1g and 4.0W/kg for 10g. So the simultaneous transmission SAR is not required.

14. SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Table 14.1: SAR Measurement Variability for Body Value (1g)

| Frequency | | Configuration | Test Position | Original SAR (W/kg) | First Repeated SAR (W/kg) | The Ratio |
|-----------|-------|------------------------------------|---------------|---------------------|---------------------------|-----------|
| MHz | Ch. | | | | | |
| 836.6 | 190 | GPRS 4TS | Phantom | 1.13 | 1.06 | 1.066 |
| 1909.8 | 810 | GPRS 4TS | Right | 1.2 | 1.15 | 1.043 |
| 1880 | 9800 | 12.2kbps RMC | Right | 1.16 | 1.12 | 1.036 |
| 1752.6 | 1512 | 12.2kbps RMC | Right | 1.06 | 1.04 | 1.019 |
| 1860 | 18700 | QPSK_20MHz_1RB_ 0 offset Low | Phantom | 1.26 | 1.26 | 1.000 |
| 1720 | 20050 | QPSK_20MHz_1RB_ 0 offset Low | Ground | 1.21 | 1.22 | 1.008 |
| 2535 | 21100 | QPSK_20MHz_1RB_ 0 offset Middle | Bottom | 1.15 | 1.12 | 1.027 |
| 824.7 | 1013 | 1xEVDO | Ground | 1.17 | 1.16 | 1.009 |
| 1851.25 | 25 | 1xEVDO | Ground | 1.14 | 1.06 | 1.075 |

Note: According to the KDB 865664 D01 repeated measurement is not required when the original highest measured SAR is < 0.8 W/kg.

15. Measurement Uncertainty

| Measurement uncertainty for 750 MHz to 3 GHz averaged over 1 gram | | | | | | |
|---|-------------|-------------|------------|-----------|-----------------|--------------------|
| Uncertainty Component | Uncertainty | Prob. | Div. | $C_i(1g)$ | Std. Unc. (1-g) | V_i or V_{eff} |
| Measurement System | | | | | | |
| Probe Calibration ($k=1$) | 5.4 | Normal | 2 | 1 | 5.40 | ∞ |
| Probe Isotropy | 4.70 | Rectangular | $\sqrt{3}$ | 0.7 | 1.90 | ∞ |
| Modulation Response | 2.40 | Rectangular | $\sqrt{3}$ | 1 | 1.39 | ∞ |
| Hemispherical Isotropy | 2.60 | Rectangular | $\sqrt{3}$ | 0.7 | 1.05 | ∞ |
| Boundary Effect | 1.00 | Rectangular | $\sqrt{3}$ | 1 | 0.58 | ∞ |
| Linearity | 4.70 | Rectangular | $\sqrt{3}$ | 1 | 2.71 | ∞ |
| System Detection Limit | 1.00 | Rectangular | $\sqrt{3}$ | 1 | 0.58 | ∞ |
| Readout Electronics | 0.30 | Normal | 1 | 1 | 0.30 | ∞ |
| Response Time | 0.80 | Rectangular | $\sqrt{3}$ | 1 | 0.46 | ∞ |
| Integration Time | 2.60 | Rectangular | $\sqrt{3}$ | 1 | 1.50 | ∞ |
| RF Ambient Noise | 0.00 | Rectangular | $\sqrt{3}$ | 1 | 0.00 | ∞ |
| RF Ambient Reflections | 0.00 | Rectangular | $\sqrt{3}$ | 1 | 0.00 | ∞ |
| Probe Positioner | 0.40 | Rectangular | $\sqrt{3}$ | 1 | 0.23 | ∞ |
| Probe Positioning | 2.90 | Rectangular | $\sqrt{3}$ | 1 | 1.67 | ∞ |
| Post-processing | 1.00 | Rectangular | $\sqrt{3}$ | 1 | 0.58 | ∞ |
| Test sample Related | | | | | | |
| Test sample Positioning | 1.2 | Normal | 1 | 1 | 1.2 | 5 |
| Device Holder Uncertainty | 3.2 | Normal | 1 | 1 | 3.2 | 71 |
| Power drift | 5 | Rectangular | $\sqrt{3}$ | 1 | 2.89 | ∞ |
| Power Scaling | 0 | Rectangular | $\sqrt{3}$ | 1 | 0.00 | ∞ |
| Phantom and Tissue Parameters | | | | | | |
| Phantom Uncertainty | 4 | Rectangular | $\sqrt{3}$ | 1 | 2.31 | ∞ |
| SAR correction | 1.9 | Rectangular | $\sqrt{3}$ | 1 | 1.10 | ∞ |
| Liquid Conductivity (meas) | 4.19 | Rectangular | 1 | 0.78 | 3.27 | ∞ |
| Liquid Permittivity (meas) | 4.4 | Rectangular | 1 | 0.26 | 1.14 | ∞ |
| Temp. unc. - Conductivity | 0.18 | Rectangular | $\sqrt{3}$ | 0.78 | 0.08 | ∞ |
| Temp. unc. - Permittivity | 0.54 | Rectangular | $\sqrt{3}$ | 0.23 | 0.07 | ∞ |
| Combined Std. Uncertainty | | RSS | | | 9.39 | |
| Expanded STD Uncertainty | | $k=2$ | | | 18.77% | |

| System check uncertainty for 750 MHz to 3 GHz averaged over 1 gram | | | | | | |
|--|-------------|-------------|------------|-----------|-----------------|--------------------|
| Uncertainty Component | Uncertainty | Prob. | Div. | $C_i(1g)$ | Std. Unc. (1-g) | V_i or V_{eff} |
| Measurement System | | | | | | |
| Probe Calibration ($k=1$) | 5.40 | Normal | 1 | 1 | 5.40 | ∞ |
| Probe Isotropy | 4.70 | Rectangular | $\sqrt{3}$ | 0.7 | 1.90 | ∞ |
| Modulation Response | 2.40 | Rectangular | $\sqrt{3}$ | 1 | 1.39 | ∞ |
| Hemispherical Isotropy | 2.60 | Rectangular | $\sqrt{3}$ | 0.7 | 1.05 | ∞ |
| Boundary Effect | 1.00 | Rectangular | $\sqrt{3}$ | 1 | 0.58 | ∞ |
| Linearity | 4.70 | Rectangular | $\sqrt{3}$ | 1 | 2.71 | ∞ |
| System Detection Limit | 1.00 | Rectangular | $\sqrt{3}$ | 1 | 0.58 | ∞ |
| Readout Electronics | 0.30 | Normal | 1 | 1 | 0.30 | ∞ |
| Response Time | 0.80 | Rectangular | $\sqrt{3}$ | 1 | 0.46 | ∞ |
| Integration Time | 2.60 | Rectangular | $\sqrt{3}$ | 1 | 1.50 | ∞ |
| RF Ambient Noise | 0.00 | Rectangular | $\sqrt{3}$ | 1 | 0.00 | ∞ |
| RF Ambient Reflections | 0.00 | Rectangular | $\sqrt{3}$ | 1 | 0.00 | ∞ |
| Probe Positioner | 0.40 | Rectangular | $\sqrt{3}$ | 1 | 0.23 | ∞ |
| Probe Positioning | 2.90 | Rectangular | $\sqrt{3}$ | 1 | 1.67 | ∞ |
| Post-processing | 1.00 | Rectangular | $\sqrt{3}$ | 1 | 0.58 | ∞ |
| Field source | | | | | | |
| Deviation of the experimental source from numerical source | 5.5 | Normal | 1 | 1 | 5.5 | ∞ |
| Source to liquid distance | 2 | Rectangular | $\sqrt{3}$ | 1 | 1.15 | ∞ |
| Power drift | 5 | Rectangular | $\sqrt{3}$ | 1 | 2.89 | ∞ |
| Phantom and Tissue Parameters | | | | | | |
| Phantom Uncertainty | 4 | Rectangular | $\sqrt{3}$ | 1 | 2.31 | ∞ |
| SAR correction | 1.9 | Rectangular | $\sqrt{3}$ | 1 | 1.10 | ∞ |
| Liquid Conductivity (meas) | 4.19 | Normal | 1 | 0.78 | 3.27 | ∞ |
| Liquid Permittivity (meas) | 4.4 | Normal | 1 | 0.26 | 1.14 | ∞ |
| Temp. unc. - Conductivity | 0.18 | Rectangular | $\sqrt{3}$ | 0.78 | 0.08 | ∞ |
| Temp. unc. - Permittivity | 0.54 | Rectangular | $\sqrt{3}$ | 0.23 | 0.07 | ∞ |
| Combined Std. Uncertainty | | RSS | | | 10.39 | |
| Expanded STD Uncertainty | | $k=2$ | | | 20.79% | |

16. Main Test Instrument

Table 17.1: List of Main Instruments

| Item | Instrument Name | Type | Serial Number | Manufacturer | Cal. Date | Cal. interval |
|------|-----------------------|----------------|---------------|--------------|--------------------------|---------------|
| 1 | Network analyzer | N5242A | MY51221755 | Agilent | 2018-12-17 | 1 year |
| 2 | Power meter | NRVD | 102257 | RS | 2019-5-10 | 1 year |
| 3 | Power sensor | NRV-Z5 | 100241 | | | |
| | | | 100644 | | | |
| 4 | Signal Generator | E4438C | MY49072044 | Agilent | 2019-5-10 | 1 Year |
| 5 | Amplifier | NTWPA-0086010F | 12023024 | rflight | No Calibration Requested | |
| 6 | Coupler | 778D | MY4825551 | Agilent | 2019-5-10 | 1 year |
| 7 | BTS | E5515C | MY50266468 | Agilent | 2018-12-17 | 1 year |
| | | MT8820C | 6201240338 | Anritsu | 2018-12-17 | 1 year |
| 8 | E-field Probe | ES3DV3 | 3252 | SPEAG | 2018-9-4 | 1 year |
| | | EX3DV4 | 7401 | SPEAG | 2019-1-5 | 1 year |
| 9 | DAE | SPEAG DAE4 | 1244 | SPEAG | 2018-12-13 | 1 year |
| 10 | Dipole Validation Kit | SPEAG D750V3 | 1144 | SPEAG | 2018-10-26 | 3 year |
| | | SPEAG D835V2 | 4d112 | SPEAG | 2018-10-25 | 3 year |
| | | SPEAG D1750V2 | 1044 | SPEAG | 2018-10-31 | 3 year |
| | | SPEAG D1900V2 | 5d151 | SPEAG | 2017-12-6 | 3 year |
| | | SPEAG D2450V2 | 858 | SPEAG | 2018-10-26 | 3 year |
| | | SPEAG D2600V2 | 1031 | SPEAG | 2018-11-1 | 3 year |
| | | SPEAG D5GHzV2 | 1172 | SPEAG | 2018-3-30 | 3 year |

ANNEX A. GRAPH RESULTS

Fig.1 GPRS 850 4TS Phantom Mode Middle

Date/Time: 2019/6/28

Electronics: DAE4 Sn1244

Medium parameters used: $f = 837$ MHz; $\sigma = 1.001$ S/m; $\epsilon_r = 56.715$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: GSM 900MHz GPRS 4TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(6.34, 6.34, 6.34); Calibrated: 9/4/2018

GPRS 850 4TS Phantom Mode Middle/Area Scan (61x121x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (Measurement) = 0.699 W/kg

GPRS 850 4TS Phantom Mode Middle/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.16 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.966 W/kg

SAR(1 g) = 0.674 W/kg; SAR(10 g) = 0.460 W/kg

Maximum value of SAR (measured) = 0.720 W/kg

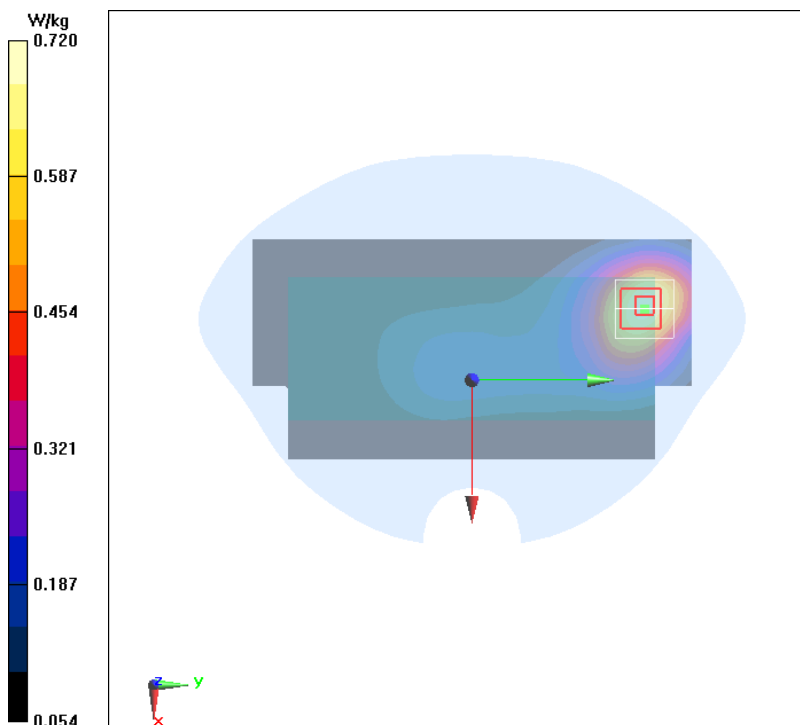


Fig.2 GPRS 850 4TS Phantom Mode Middle

Date/Time: 2019/6/28

Electronics: DAE4 Sn1244

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 1.001 \text{ S/m}$; $\epsilon_r = 56.715$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: GSM 900MHz GPRS 4TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(6.34, 6.34, 6.34); Calibrated: 9/4/2018

GPRS 850 4TS Phantom Mode Middle/Area Scan (61x121x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 2.87 W/kg

GPRS 850 4TS Phantom Mode Middle/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.264 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 4.70 W/kg

SAR(1 g) = 2.72 W/kg; SAR(10 g) = 1.59 W/kg

Maximum value of SAR (measured) = 2.93 W/kg

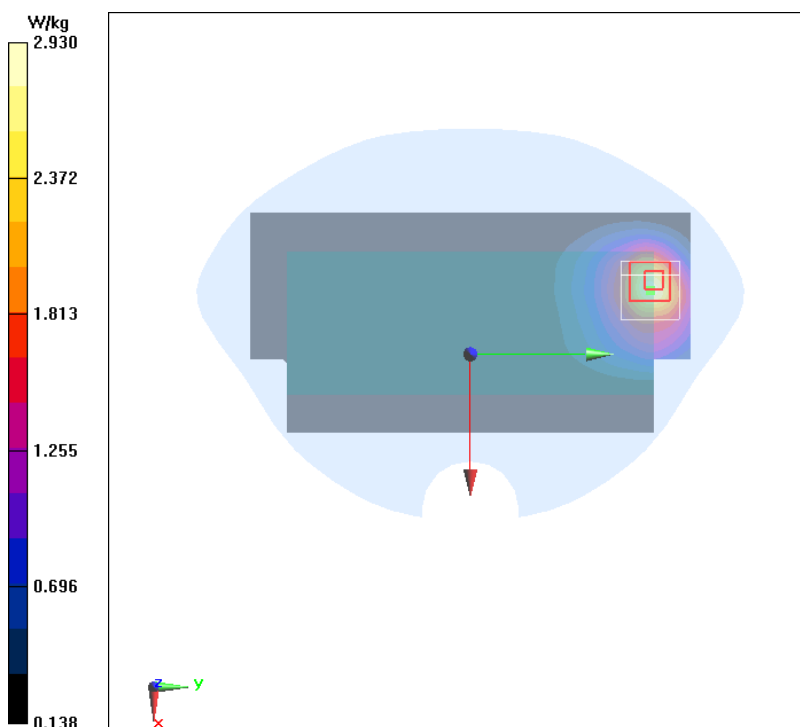


Fig.3 GPRS 1900 4TS Right Mode High

Date/Time: 2019/7/5

Electronics: DAE4 Sn1244

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.495$ S/m; $\epsilon_r = 52.237$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS 4TS (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(4.77, 4.77, 4.77); Calibrated: 9/4/2018

GPRS 1900 4TS Right Mode High/Area Scan (41x121x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 1.09 W/kg

GPRS 1900 4TS Right Mode High/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.09 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.586 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

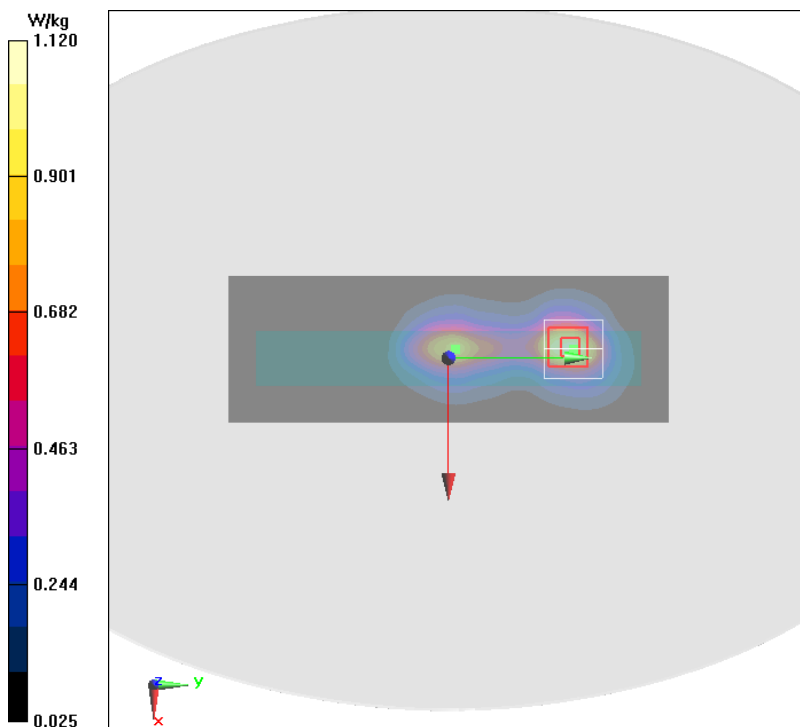


Fig.4 GPRS 1900 4TS Phantom Mode Middle

Date/Time: 2019/7/5

Electronics: DAE4 Sn1244

Medium parameters used (extrapolated): $f = 1880$ MHz; $\sigma = 1.464$ S/m; $\epsilon_r = 52.35$; $\rho = 1000$ kg/m³

Ambient Temperature:22.5°C Liquid Temperature:22.5°C

Communication System: GSM 1900MHz GPRS 4TS (0); Frequency: 1880 MHz; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(4.77, 4.77, 4.77); Calibrated: 9/4/2018

GPRS 1900 4TS Phantom Mode Middle/Area Scan (61x121x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 1.90 W/kg

GPRS 1900 4TS Phantom Mode Middle/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.876 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 3.24 W/kg

SAR(1 g) = 1.89 W/kg; SAR(10 g) = 1.03 W/kg

Maximum value of SAR (measured) = 2.11 W/kg

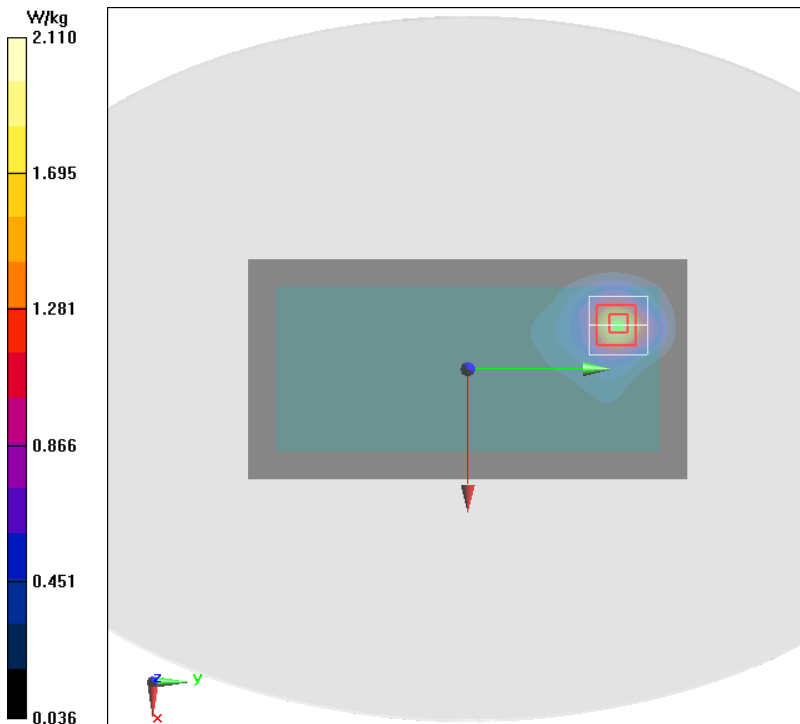


Fig.5 WCDMA B2 Right Mode High

Date/Time: 2019/7/5

Electronics: DAE4 Sn1244

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.493$ S/m; $\epsilon_r = 52.244$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: WCDMA Professional Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.77, 4.77, 4.77); Calibrated: 9/4/2018

WCDMA B2 Right Mode High/Area Scan (41x121x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 0.971 W/kg

WCDMA B2 Right Mode High/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.495 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.866 W/kg; SAR(10 g) = 0.502 W/kg

Maximum value of SAR (measured) = 0.949 W/kg

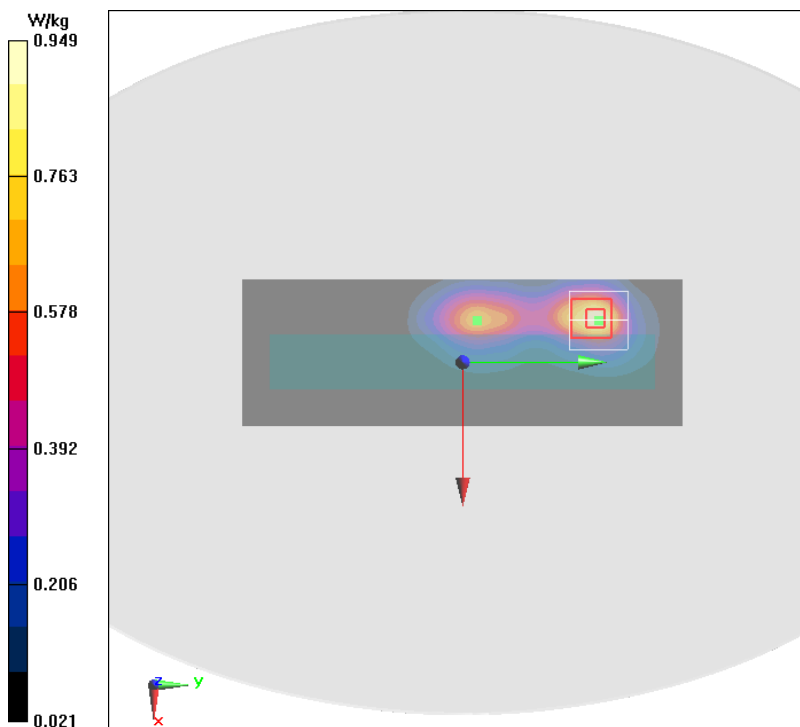


Fig.6 WCDMA B2 Right Mode Middle

Date/Time: 2019/7/5

Electronics: DAE4 Sn1244

Medium parameters used (extrapolated): $f = 1880$ MHz; $\sigma = 1.464$ S/m; $\epsilon_r = 52.35$; $\rho = 1000$ kg/m³

Ambient Temperature:22.5°C Liquid Temperature:22.5°C

Communication System: WCDMA Professional Band II ; Frequency: 1880 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.77, 4.77, 4.77); Calibrated: 9/4/2018

WCDMA B2 Right Mode Middle/Area Scan (41x121x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 1.86 W/kg

WCDMA B2 Right Mode Middle/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.32 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.88 W/kg

SAR(1 g) = 1.69 W/kg; SAR(10 g) = 0.930 W/kg

Maximum value of SAR (measured) = 1.87 W/kg

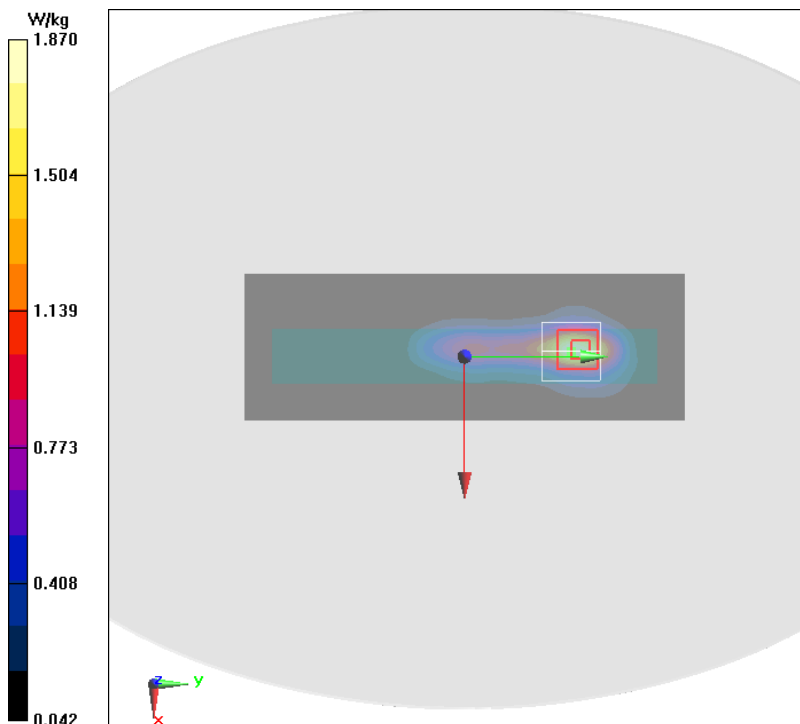


Fig.7 WCDMA B4 Right Mode High

Date/Time: 2019/7/5

Electronics: DAE4 Sn1244

Medium parameters used: $f = 1753 \text{ MHz}$; $\sigma = 1.43 \text{ S/m}$; $\epsilon_r = 55.382$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: WCDMA Professional 1800MHz; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.99, 4.99, 4.99); Calibrated: 9/4/2018

WCDMA B4 Right Mode High/Area Scan (41x121x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 0.855 W/kg

WCDMA B4 Right Mode High/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.11 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.794 W/kg; SAR(10 g) = 0.499 W/kg

Maximum value of SAR (measured) = 0.864 W/kg

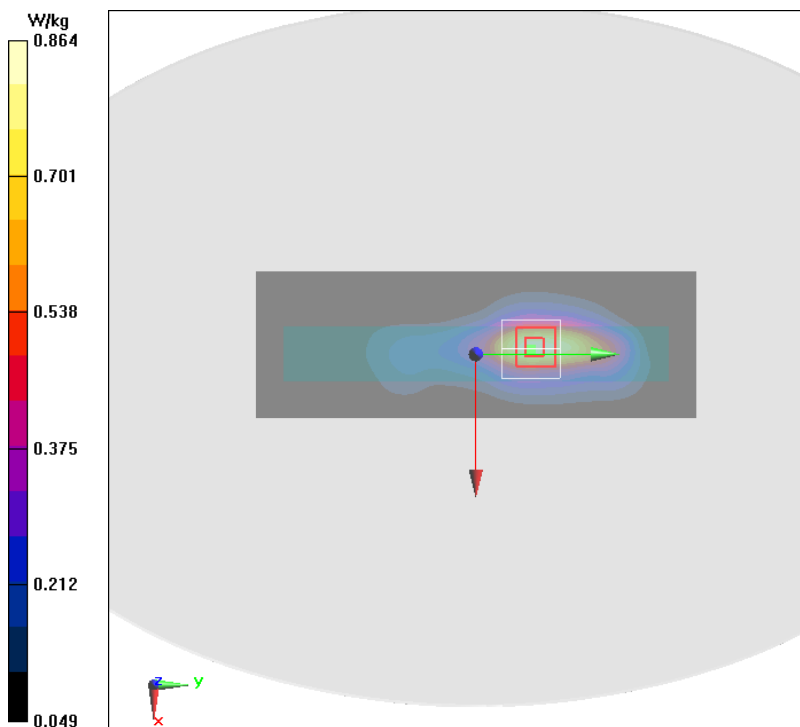


Fig.8 WCDMA B4 Right Mode Middle

Date/Time: 2019/7/5

Electronics: DAE4 Sn1244

Medium parameters used: $f = 1733 \text{ MHz}$; $\sigma = 1.408 \text{ S/m}$; $\epsilon_r = 55.442$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: WCDMA Professional 1800MHz; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.99, 4.99, 4.99); Calibrated: 9/4/2018

WCDMA B4 Right Mode Middle/Area Scan (41x121x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 1.72 W/kg

WCDMA B4 Right Mode Middle/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.39 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.49 W/kg

SAR(1 g) = 1.49 W/kg; SAR(10 g) = 0.860 W/kg

Maximum of SAR (measured) = 1.66 W/kg

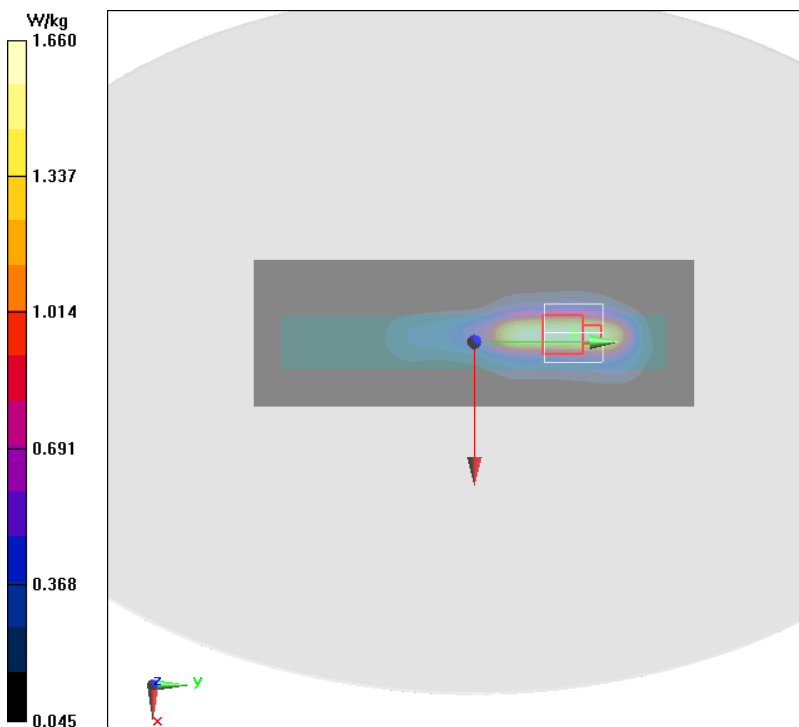


Fig.9 WCDMA B5 4TS Phantom Mode Middle

Date/Time: 2019/6/28

Electronics: DAE4 Sn1244

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 1.001 \text{ S/m}$; $\epsilon_r = 56.715$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: WCDMA Professional Band VIII; Frequency: 836.6 MHz ; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.34, 6.34, 6.34); Calibrated: 9/4/2018

WCDMA B5 4TS Phantom Mode Middle/Area Scan (61x121x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 0.255 W/kg

WCDMA B5 4TS Phantom Mode Middle/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.309 V/m ; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.332 W/kg

SAR(1 g) = 0.237 W/kg ; SAR(10 g) = 0.162 W/kg

Maximum value of SAR (measured) = 0.253 W/kg

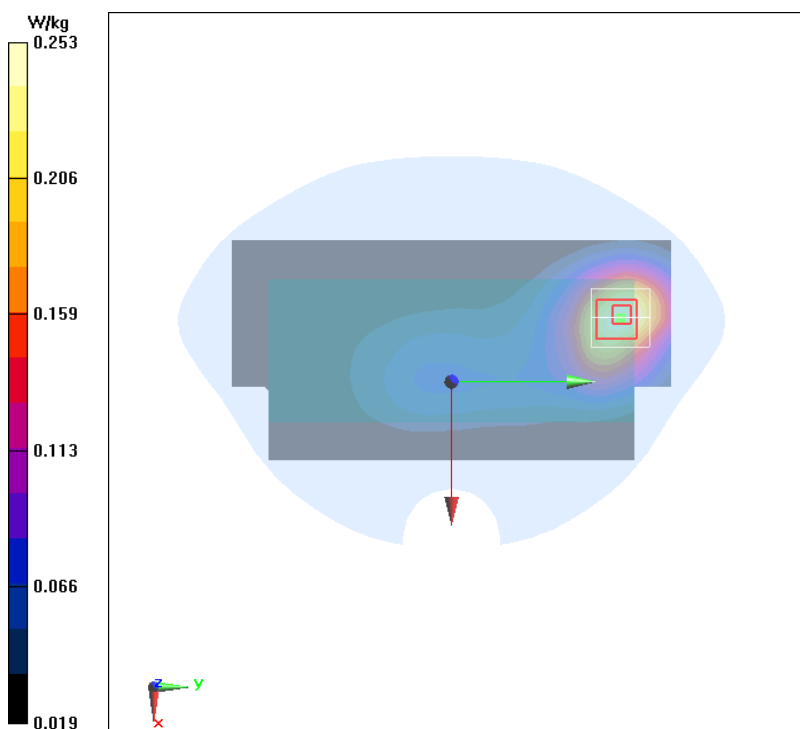


Fig.10 WCDMA B5 Phantom Mode Middle

Date/Time: 2019/6/28

Electronics: DAE4 Sn1244

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 1.001 \text{ S/m}$; $\epsilon_r = 56.715$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: WCDMA Professional Band VIII; Frequency: 836.6 MHz ; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.34, 6.34, 6.34); Calibrated: 9/4/2018

WCDMA B5 Phantom Mode Middle/Area Scan (61x121x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 1.10 W/kg

WCDMA B5 Phantom Mode Middle/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.743 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 1.01 W/kg ; SAR(10 g) = 0.593 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

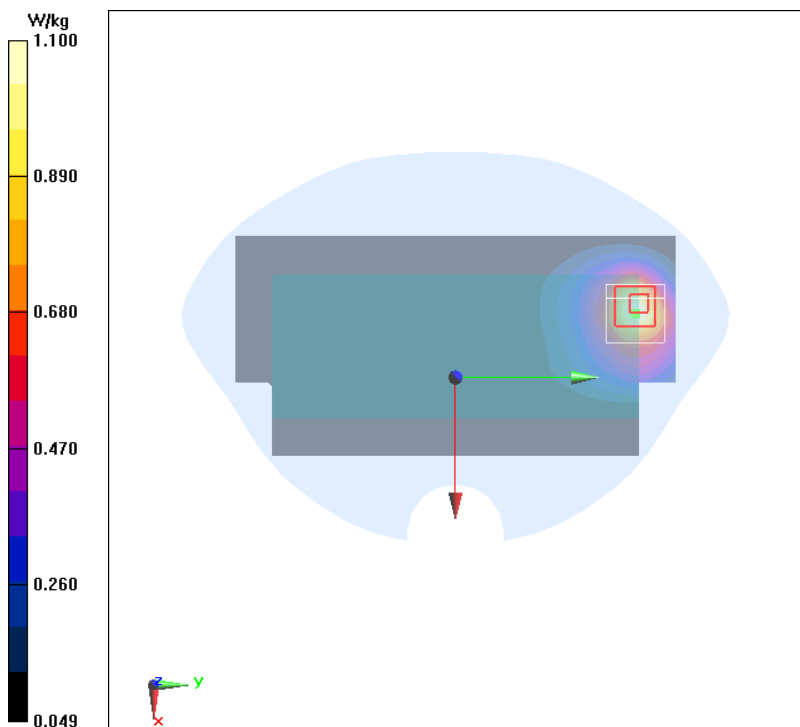


Fig.11 LTE2 20MHz 1RB 0 Offset Phantom Mode Low

Date/Time: 2019/7/5

Electronics: DAE4 Sn1244

Medium parameters used (extrapolated): $f = 1860$ MHz; $\sigma = 1.444$ S/m; $\epsilon_r = 52.426$; $\rho = 1000$ kg/m³

Ambient Temperature:22.5°C Liquid Temperature:22.5°C

Communication System: LTE Band 2 Professional 1900MHz; Frequency: 1860 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.77, 4.77, 4.77); Calibrated: 9/4/2018

LTE2 20MHz 1RB 0 Offset Phantom Mode Low/Area Scan (71x111x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 0.585 W/kg

LTE2 20MHz 1RB 0 Offset Phantom Mode Low/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.44 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.827 W/kg

SAR(1 g) = 0.566 W/kg; SAR(10 g) = 0.391 W/kg

Maximum value of SAR (measured) = 0.604 W/kg

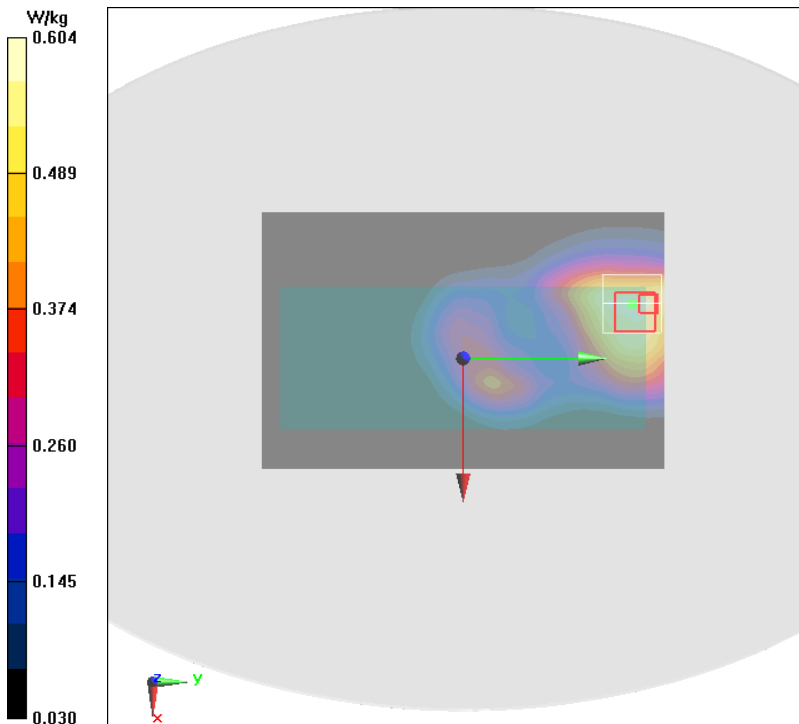


Fig.12 LTE 2 20MHz 1RB 0 Offset Right Mode High

Date/Time: 2019/7/5

Electronics: DAE4 Sn1244

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.485$ S/m; $\epsilon_r = 52.274$; $\rho = 1000$ kg/m³

Ambient Temperature:22.5°C Liquid Temperature:22.5°C

Communication System: LTE Band 2 Professional 1900MHz; Frequency: 1900 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.77, 4.77, 4.77); Calibrated: 9/4/2018

LTE 2 20MHz 1RB 0 Offset Right Mode High/Area Scan (61x121x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 2.43 W/kg

LTE 2 20MHz 1RB 0 Offset Right Mode High/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.37 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 4.12 W/kg

SAR(1 g) = 2.39 W/kg; SAR(10 g) = 1.29 W/kg

Maximum value of SAR (measured) = 2.66 W/kg

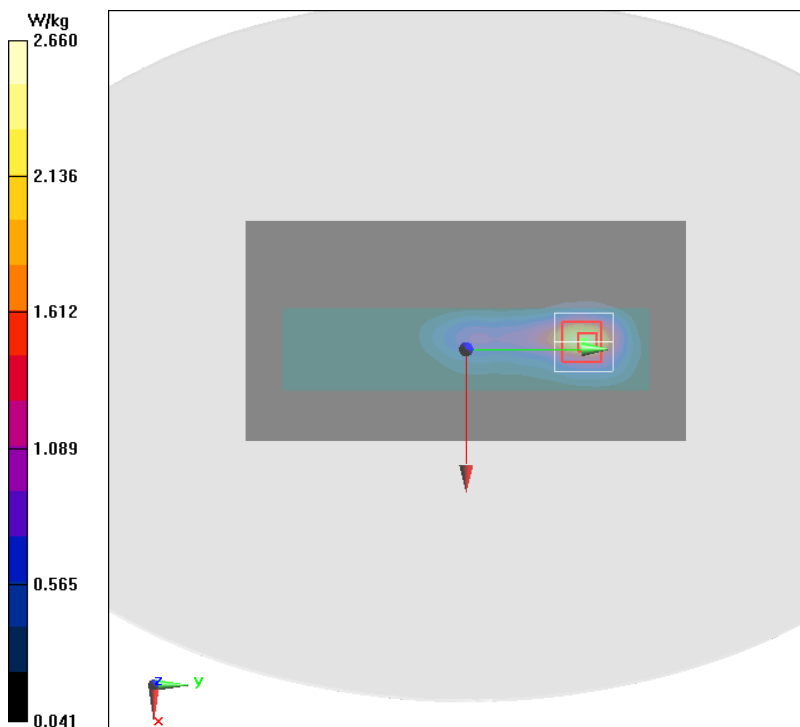


Fig.13 LTE 4 20MHz 1RB 0 Offset Ground Mode Low

Date/Time: 2019/7/5

Electronics: DAE4 Sn1244

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.394$ S/m; $\epsilon_r = 55.481$; $\rho = 1000$ kg/m³

Ambient Temperature:22.5°C Liquid Temperature:22.5°C

Communication System: LTE Band 4 Professional 1800MHz; Frequency: 1720 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.99, 4.99, 4.99); Calibrated: 9/4/2018

LTE 4 20MHz 1RB 0 Offset Ground Mode Low/Area Scan (71x111x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 0.640 W/kg

LTE 4 20MHz 1RB 0 Offset Ground Mode Low/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.962 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.635 W/kg; SAR(10 g) = 0.375 W/kg

Maximum value of SAR (measured) = 0.661 W/kg

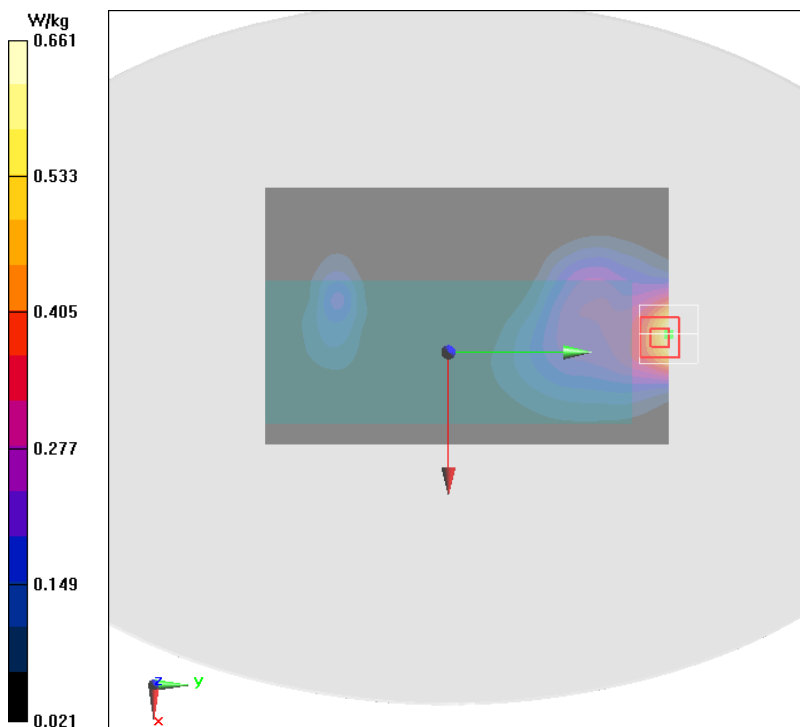


Fig.14 LTE 4 20MHz 1RB 0 Offset Phantom Mode Low

Date/Time: 2019/7/5

Electronics: DAE4 Sn1244

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.394$ S/m; $\epsilon_r = 55.481$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: LTE Band 4 Professional 1800MHz; Frequency: 1720 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.99, 4.99, 4.99); Calibrated: 9/4/2018

LTE 4 20MHz 1RB 0 Offset Phantom Mode Low/Area Scan (71x111x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 1.83 W/kg

LTE 4 20MHz 1RB 0 Offset Phantom Mode Low/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.944 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 2.86 W/kg

SAR(1 g) = 1.76 W/kg; SAR(10 g) = 1.03 W/kg

Maximum value of SAR (measured) = 1.91 W/kg

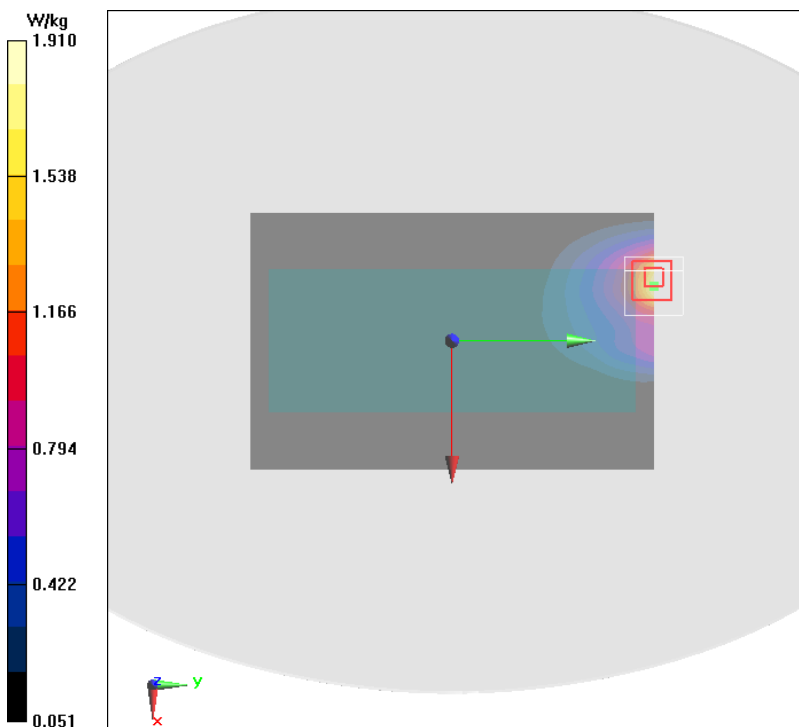


Fig.15 LTE B7 20MHz 1RB 0 offset Bottom Mode High 5mm N05

Date/Time: 2019/7/20

Electronics: DAE4 Sn1244

Medium parameters used: $f = 2560$ MHz; $\sigma = 2.061$ S/m; $\epsilon_r = 54.476$; $\rho = 1000$ kg/m³

Ambient Temperature:22.5°C Liquid Temperature:22.5°C

Communication System: LTE Band 7 Professional 2450MHz; Frequency: 2560 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.19, 4.19, 4.19); Calibrated: 9/4/2018

LTE B7 20MHz 1RB 0 offset Bottom Mode High 5mm N05/Area Scan (51x81x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 1.33 W/kg

LTE B7 20MHz 1RB 0 offset Bottom Mode High 5mm N05/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.57 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.42 W/kg

SAR(1 g) = 1.17 W/kg; SAR(10 g) = 0.542 W/kg

Maximum value of SAR (measured) = 1.32 W/kg

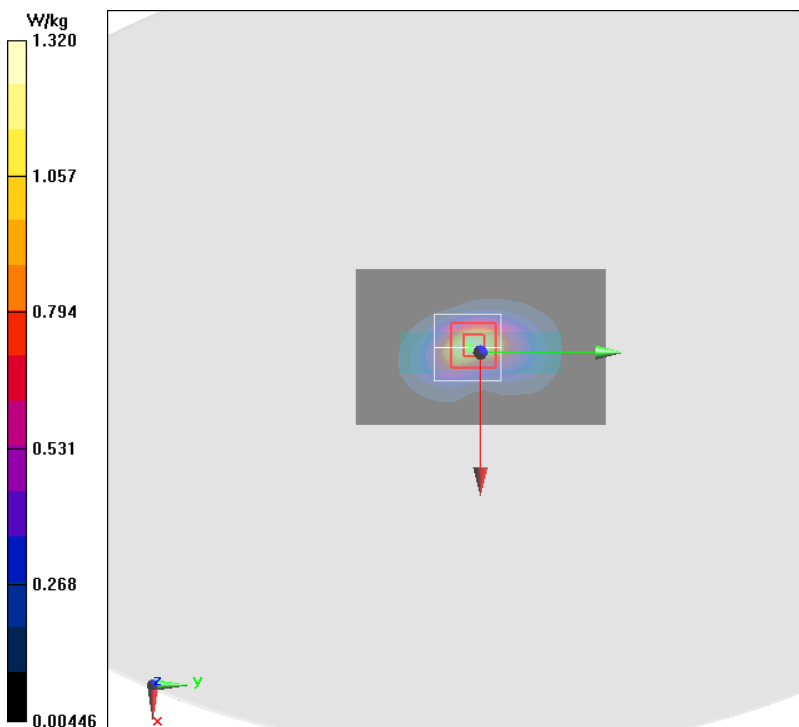


Fig.16 LTE B7 20MHz 1RB 0 offset Bottom Mode High

Date/Time: 2019/7/20

Electronics: DAE4 Sn1244

Medium parameters used: $f = 2560$ MHz; $\sigma = 2.061$ S/m; $\epsilon_r = 54.476$; $\rho = 1000$ kg/m³

Ambient Temperature:22.5°C Liquid Temperature:22.5°C

Communication System: LTE Band 7 Professional 2600MHz; Frequency: 2560 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.19, 4.19, 4.19); Calibrated: 9/4/2018

LTE B7 20MHz 1RB 0 offset Bottom Mode High/Area Scan (41x61x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 1.91 W/kg

LTE B7 20MHz 1RB 0 offset Bottom Mode High/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.961 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 6.64 W/kg

SAR(1 g) = 2.9 W/kg; SAR(10 g) = 1.19 W/kg

Maximum value of SAR (measured) = 3.20 W/kg

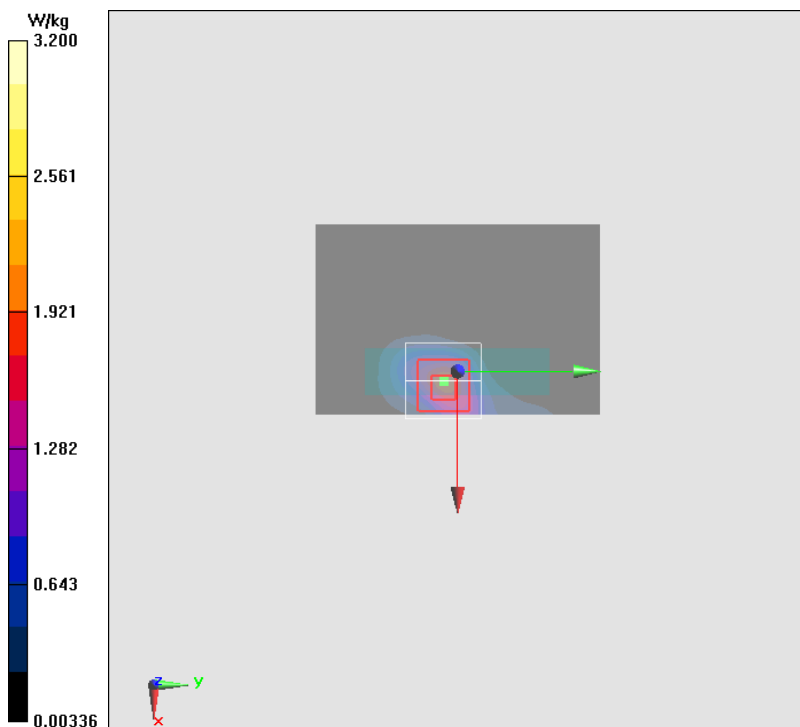


Fig.17 LTE B17 10M 1RB25offset Phantom Mode Middle

Date/Time: 2019/6/28

Electronics: DAE4 Sn1244

Medium parameters used: $f = 710 \text{ MHz}$; $\sigma = 0.877 \text{ S/m}$; $\epsilon_r = 58.181$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: LTE Band 17 Professional 900MHz; Frequency: 710 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.53, 6.53, 6.53); Calibrated: 9/4/2018

LTE B17 10M 1RB25offset Phantom Mode Middle/Area Scan (61x121x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 0.149 W/kg

LTE B17 10M 1RB25offset Phantom Mode Middle/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.385 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.195 W/kg

SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 0.151 W/kg

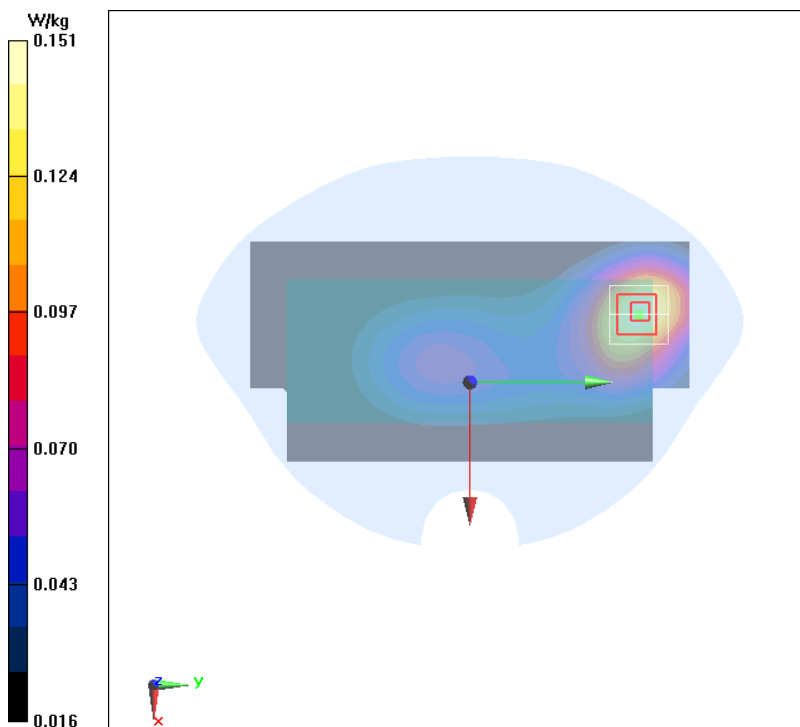


Fig.18 LTE B17 10M 1RB25offset Ground Mode Middle

Date/Time: 2019/6/28

Electronics: DAE4 Sn1244

Medium parameters used: $f = 710 \text{ MHz}$; $\sigma = 0.877 \text{ S/m}$; $\epsilon_r = 58.181$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: LTE Band 17 Professional 900MHz; Frequency: 710 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.53, 6.53, 6.53); Calibrated: 9/4/2018

LTE B17 10M 1RB25offset Ground Mode Middle/Area Scan (61x121x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 0.489 W/kg

LTE B17 10M 1RB25offset Ground Mode Middle/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.00 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.810 W/kg

SAR(1 g) = 0.478 W/kg; SAR(10 g) = 0.284 W/kg

Maximum value of SAR (measured) = 0.534 W/kg

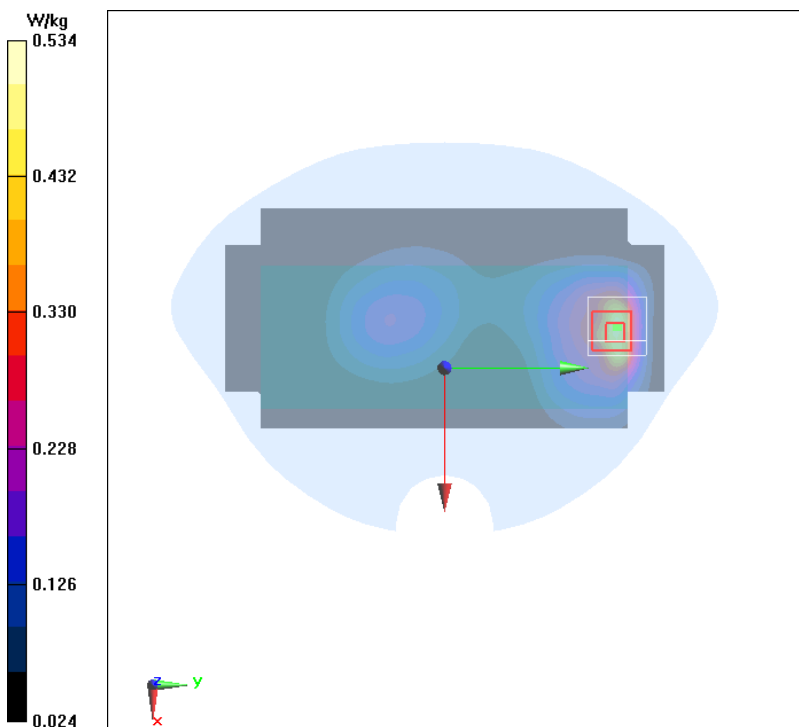


Fig.19 CDMA BC0 Ground Mode Low 5mm

Date/Time: 2019/6/28

Electronics: DAE4 Sn1244

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.989 \text{ S/m}$; $\epsilon_r = 56.81$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: CDMA 835MHz 835MHz; Frequency: 824.7 MHz ; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.34, 6.34, 6.34); Calibrated: 9/4/2018

CDMA BC0 Ground Mode Low 5mm/Area Scan (71x141x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 0.537 W/kg

CDMA BC0 Ground Mode Low 5mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.668 V/m ; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.778 W/kg

SAR(1 g) = 0.480 W/kg ; SAR(10 g) = 0.287 W/kg

Maximum value of SAR (measured) = 0.527 W/kg

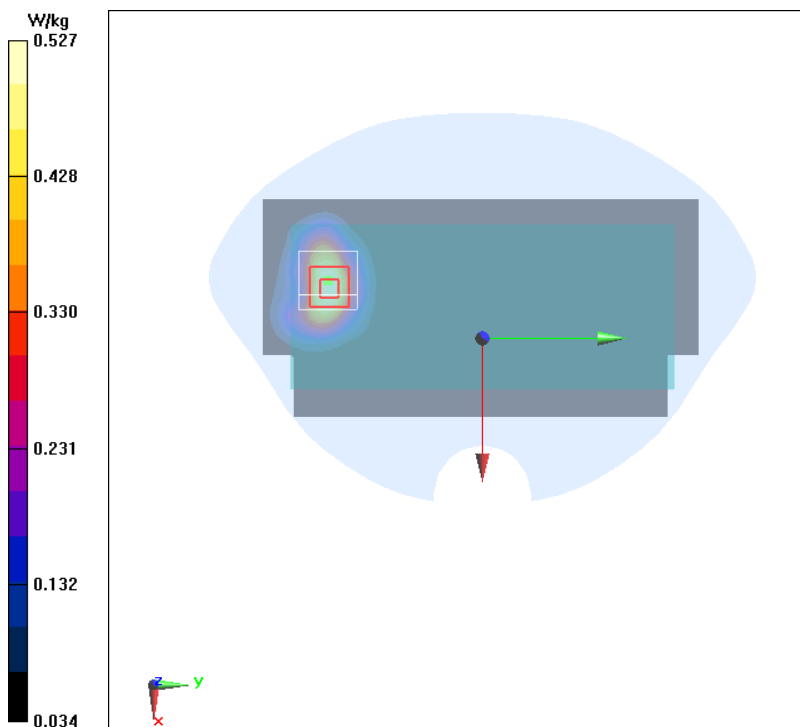


Fig.20 CDMA BC0 Ground Mode Middle 0mm

Date/Time: 2019/6/28

Electronics: DAE4 Sn1244

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 1.001 \text{ S/m}$; $\epsilon_r = 56.687$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: CDMA 835MHz 835MHz; Frequency: 836.52 MHz ; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.34, 6.34, 6.34); Calibrated: 9/4/2018

CDMA BC0 Ground Mode Middle 0mm/Area Scan (71x141x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 0.824 W/kg

CDMA BC0 Ground Mode Middle 0mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 0.3940 V/m ; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.709 W/kg ; SAR(10 g) = 0.410 W/kg

Maximum value of SAR (measured) = 0.796 W/kg

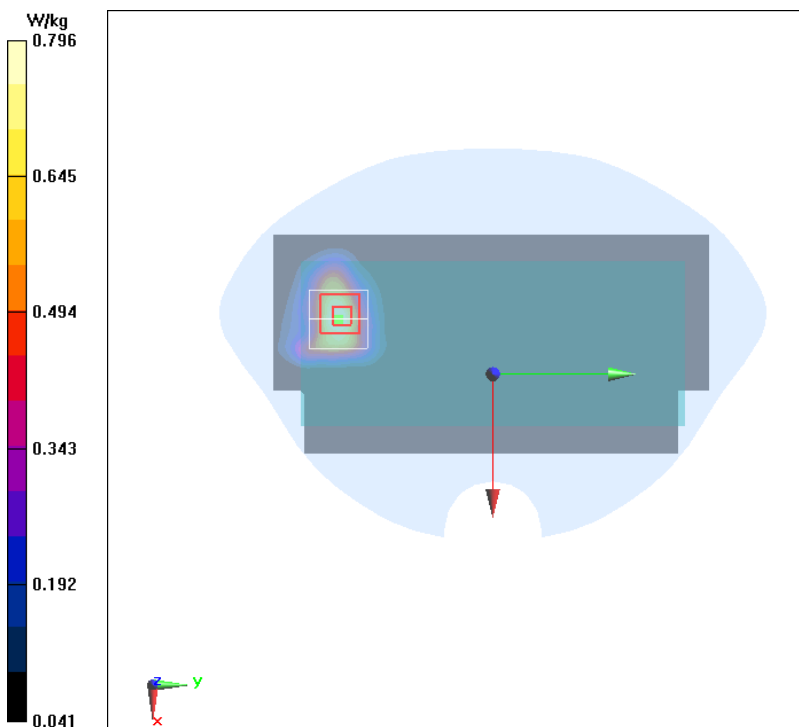


Fig.21 CDMA BC1 Ground Mode Low

Date/Time: 2019/7/5

Electronics: DAE4 Sn1244

Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.526$ S/m; $\epsilon_r = 54.732$; $\rho = 1000$ kg/m³

Ambient Temperature:22.5°C Liquid Temperature:22.5°C

Communication System: CDMA 1900MHz 1900MHz; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.77, 4.77, 4.77); Calibrated: 9/4/2018

CDMA BC1 Ground Mode Low/Area Scan (71x141x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 0.643 W/kg

CDMA BC1 Ground Mode Low/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.132 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.905 W/kg

SAR(1 g) = 0.507 W/kg; SAR(10 g) = 0.294 W/kg

Maximum value of SAR (measured) = 0.547 W/kg

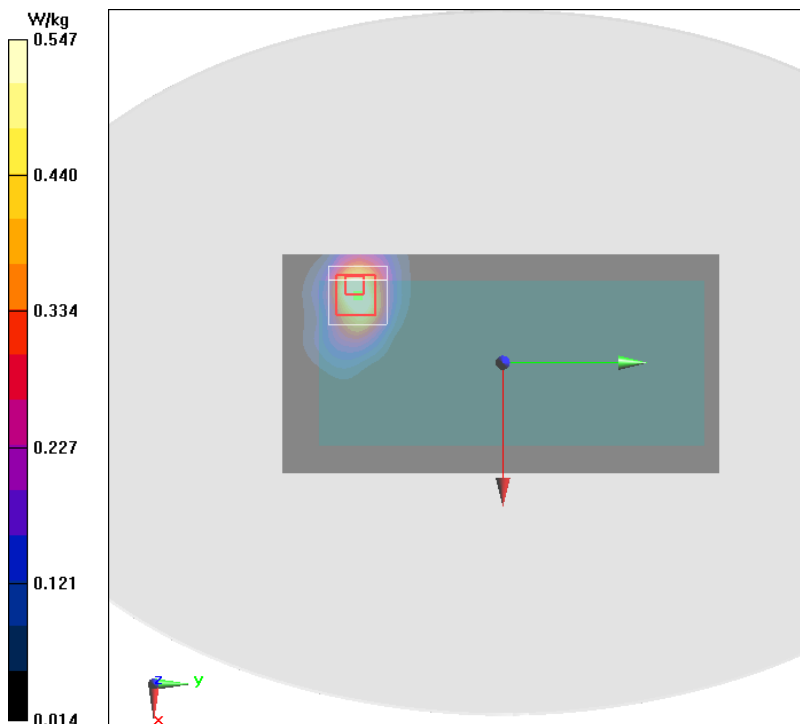


Fig.22 CDMA BC1 Ground Mode Middle

Date/Time: 2019/7/5

Electronics: DAE4 Sn1244

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.555 \text{ S/m}$; $\epsilon_r = 54.618$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: CDMA 1900MHz 1900MHz; Frequency: 1880 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.77, 4.77, 4.77); Calibrated: 9/4/2018

CDMA BC1 Ground Mode Middle 0mm/Area Scan (71x141x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 1.04 W/kg

CDMA BC1 Ground Mode Middle 0mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.989 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.765 W/kg; SAR(10 g) = 0.419 W/kg

Maximum value of SAR (measured) = 0.806 W/kg

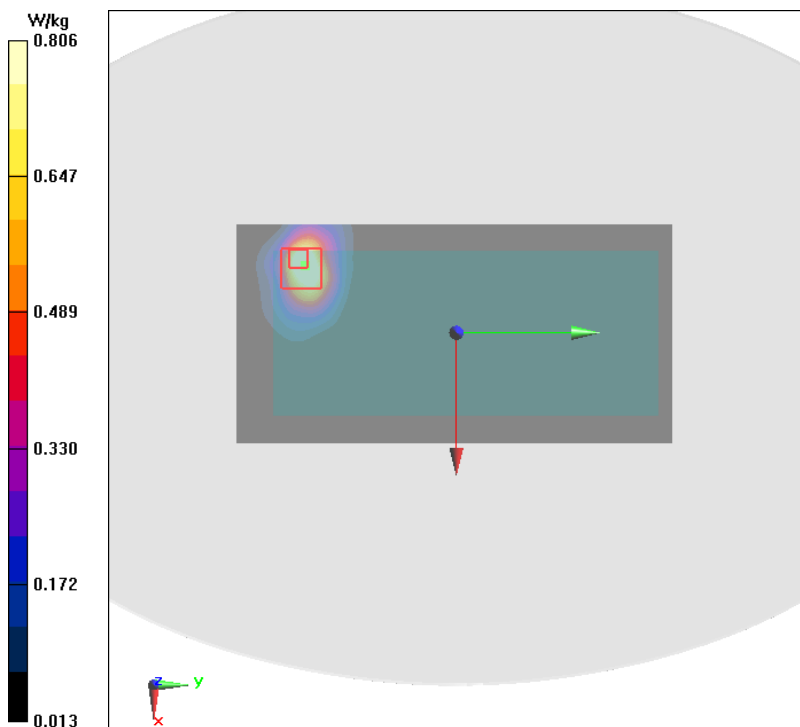


Fig.23 WiFi2450 Right Mode Low

Date/Time: 2019/7/6

Electronics: DAE4 Sn1244

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.879 \text{ S/m}$; $\epsilon_r = 54.877$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: Wifi 2450 2600MHz; Frequency: 2412 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.41, 4.41, 4.41); Calibrated: 9/4/2018

WiFi2450 Right Mode Low/Area Scan (41x121x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 0.373 W/kg

WiFi2450 Right Mode Low/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.708 V/m ; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.888 W/kg

SAR(1 g) = 0.407 W/kg ; SAR(10 g) = 0.183 W/kg

Maximum value of SAR (measured) = 0.421 W/kg

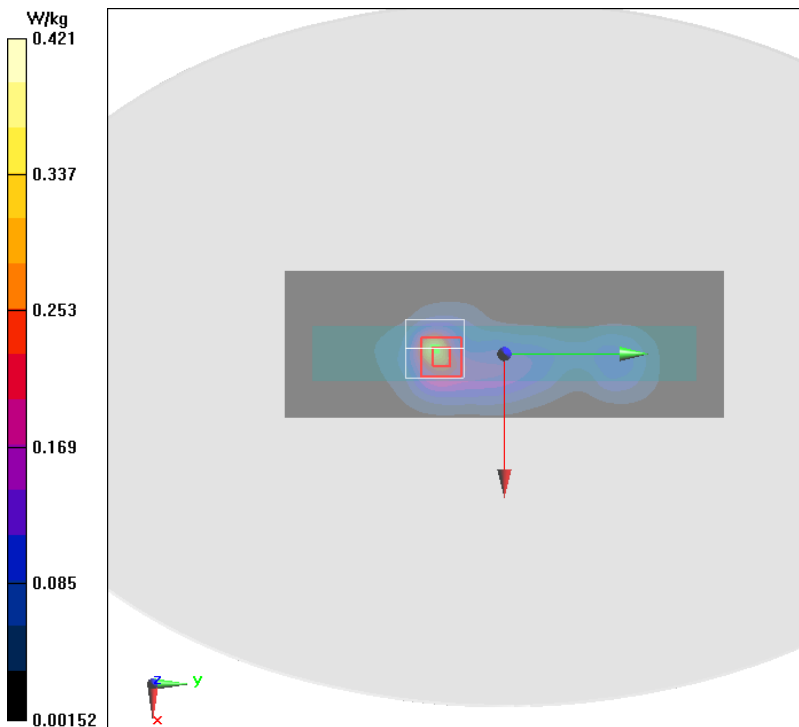


Fig.24 WiFi2450 Right Mode Low

Date/Time: 2019/7/25

Electronics: DAE4 Sn1244

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.879$ S/m; $\epsilon_r = 54.877$; $\rho = 1000$ kg/m³

Ambient Temperature:22.5°C Liquid Temperature:22.5°C

Communication System: Wifi 2450; Frequency: 2412 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.41, 4.41, 4.41); Calibrated: 9/4/2018

WiFi2450 Right Mode Low/Area Scan (41x121x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 0.570 W/kg

WiFi2450 Right Mode Low/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.49 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 0.700 W/kg; SAR(10 g) = 0.272 W/kg

Maximum value of SAR (measured) = 0.836 W/kg

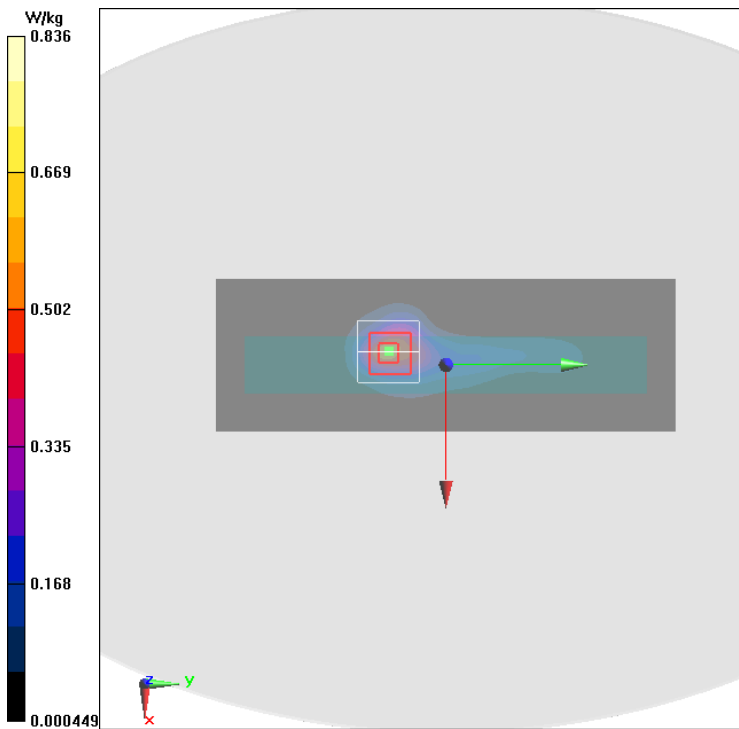


Fig.25 WIFI 5G Right Mode Middle 5mm

Date/Time: 2019/7/17

Electronics: DAE4 Sn1244

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.924$ S/m; $\epsilon_r = 49.01$; $\rho = 1000$ kg/m³

Ambient Temperature:22.5°C Liquid Temperature:22.5°C

Communication System: 5GHz U-NII-3 5GHz; Frequency: 5755 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7401ConvF(4.69, 4.69, 4.69); Calibrated: 1/15/2019

WIFI 5G Right Mode Middle 5mm/Area Scan (41x221x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 0.728 W/kg

WIFI 5G Right Mode Middle 5mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.816 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.298 W/kg; SAR(10 g) = 0.094 W/kg

Maximum of SAR (measured) = 0.770 W/kg

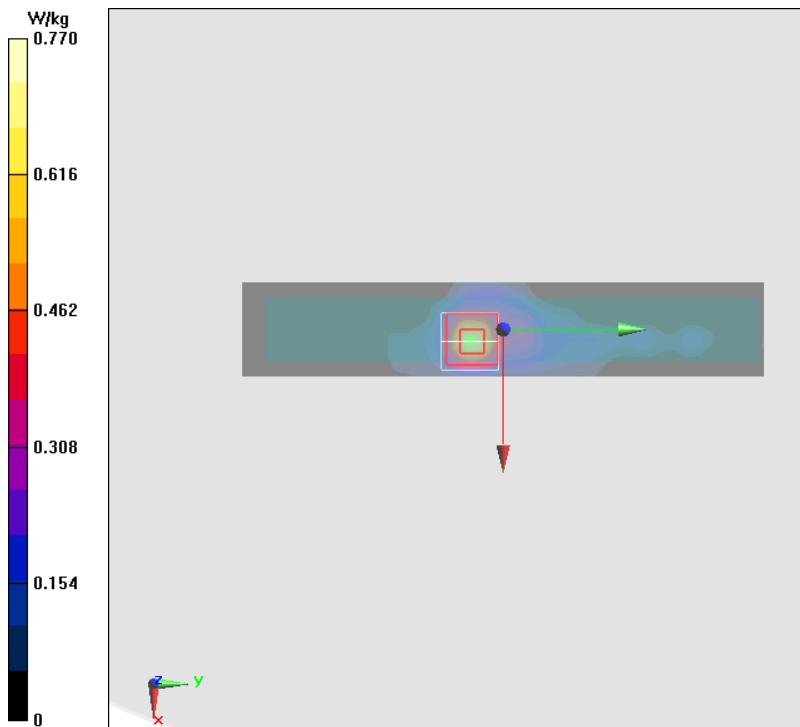


Fig.26 WIFI 5G Right Mode Middle 0mm

Date/Time: 2019/7/17

Electronics: DAE4 Sn1244

Medium parameters used: $f = 5190$ MHz; $\sigma = 5.115$ S/m; $\epsilon_r = 50.189$; $\rho = 1000$ kg/m³

Ambient Temperature:22.5°C Liquid Temperature:22.5°C

Communication System: 5GHz U-NII-1 5GHz; Frequency: 5190 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7401ConvF(5.26, 5.26, 5.26); Calibrated: 1/15/2019

WIFI 5G Right Mode Middle 0mm/Area Scan (51x221x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 1.17 W/kg

WIFI 5G Right Mode Middle 0mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.322 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.85 W/kg

SAR(1 g) = 0.444 W/kg; SAR(10 g) = 0.125 W/kg

Maximum of SAR (measured) = 1.15 W/kg

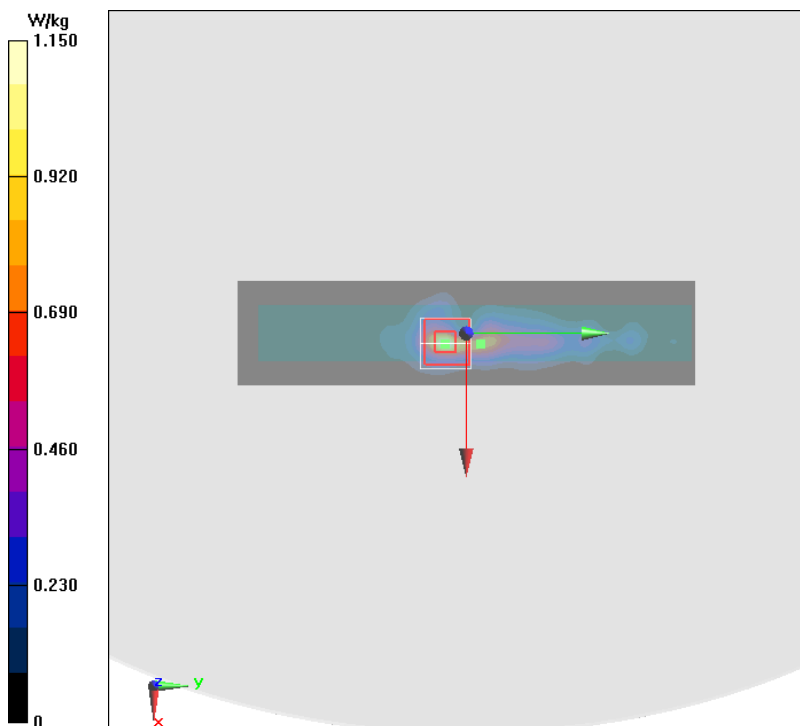

ANNEX B. SYSTEM VALIDATION RESULTS

Body 750 MHz

Date/Time: 2019/6/28

Electronics: DAE4 Sn1244

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.916 \text{ S/m}$; $\epsilon_r = 57.721$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: CW 750MHz; Frequency: 750 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.53, 6.53, 6.53); Calibrated: 9/4/2018

System Validation/Area Scan (71x131x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 2.32 W/kg

System Validation/Zoom Scan (7x7x7) (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 50.15 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.07 W/kg

SAR(1 g) = 2.16 W/kg ; SAR(10 g) = 1.48 W/kg

Maximum value of SAR (measured) = 2.32 W/kg

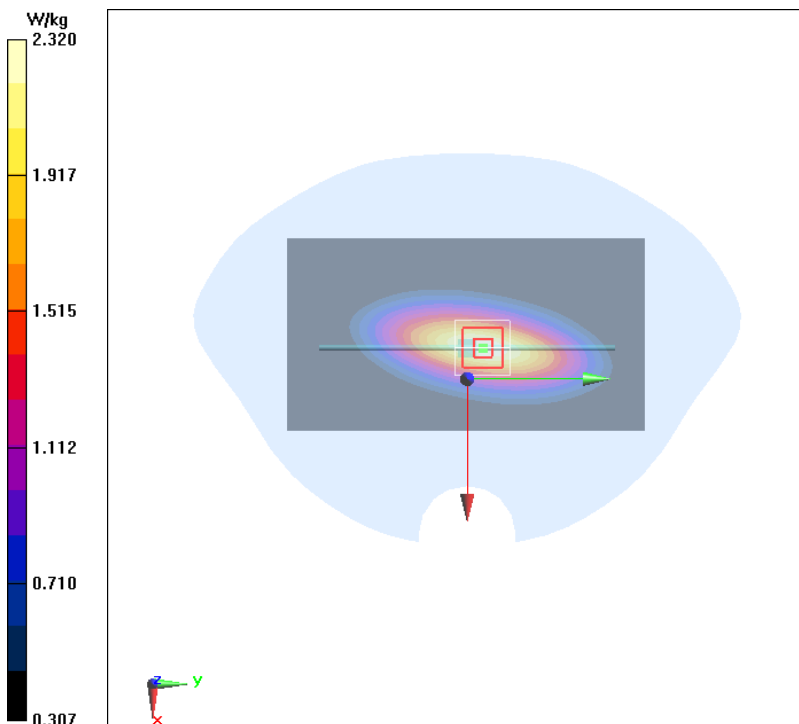

Body 835 MHz

Date/Time: 2019/6/28

Electronics: DAE4 Sn1244

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.998 \text{ S/m}$; $\epsilon_r = 56.73$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: CW 900MHz; Frequency: 835 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.34, 6.34, 6.34); Calibrated: 9/4/2018

System Validation 2/Area Scan (61x131x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 2.70 W/kg

System Validation 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 52.66 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.61 W/kg

SAR(1 g) = 2.49 W/kg ; SAR(10 g) = 1.65 W/kg

Maximum value of SAR (measured) = 2.69 W/kg

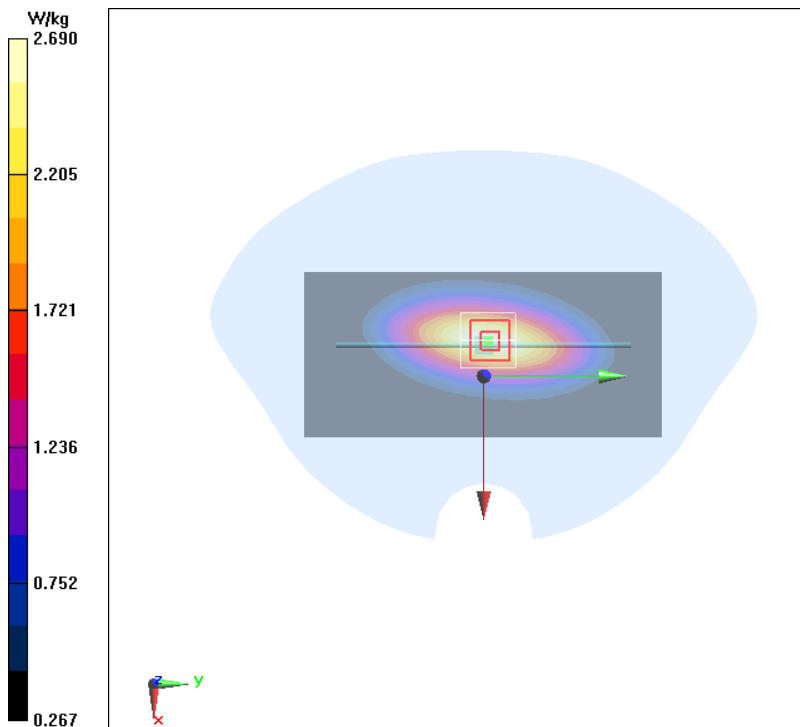

Body 1750 MHz

Date/Time: 2019/7/5

Electronics: DAE4 Sn1244

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.426$ S/m; $\epsilon_r = 55.385$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: CW 1800MHz; Frequency: 1750 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.99, 4.99, 4.99); Calibrated: 9/4/2018

System validation/Area Scan (51x91x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 10.7 W/kg

System validation/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 78.58 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 16.3 W/kg

SAR(1 g) = 9.34 W/kg; SAR(10 g) = 5.06 W/kg

Maximum value of SAR (measured) = 10.5 W/kg

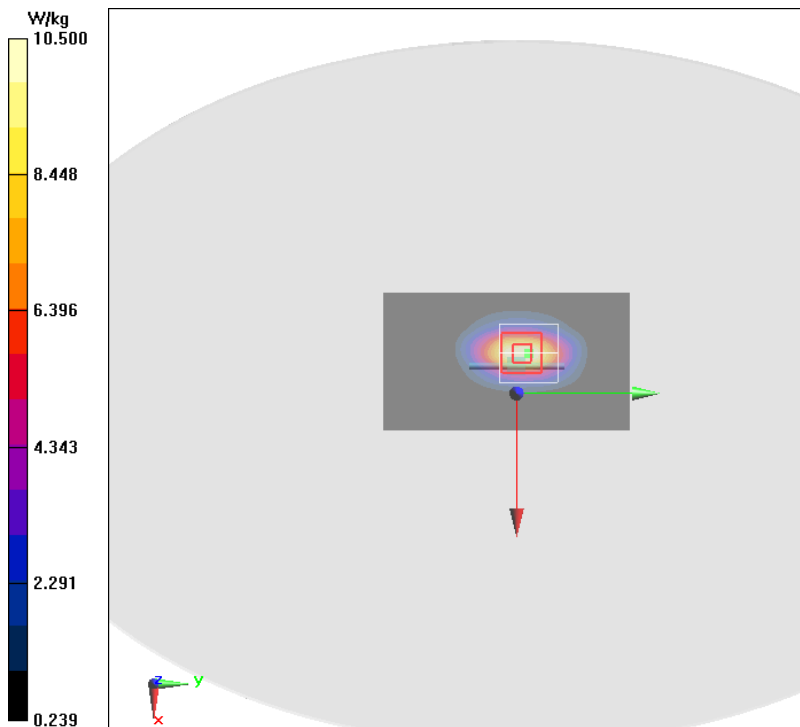

Body 1900 MHz

Date/Time: 2019/7/5

Electronics: DAE4 Sn1244

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.485$ S/m; $\epsilon_r = 52.274$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: CW 1900MHz; Frequency: 1900 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.77, 4.77, 4.77); Calibrated: 9/4/2018

System check Validation/Area Scan (61x61x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (Measurement) = 12.4 W/kg

System check Validation/Zoom Scan (7x7x7) (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 90.03 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 18.1 W/kg

SAR(1 g) = 9.81 W/kg; SAR(10 g) = 5.11 W/kg

Maximum value of SAR (measured) = 11.0 W/kg

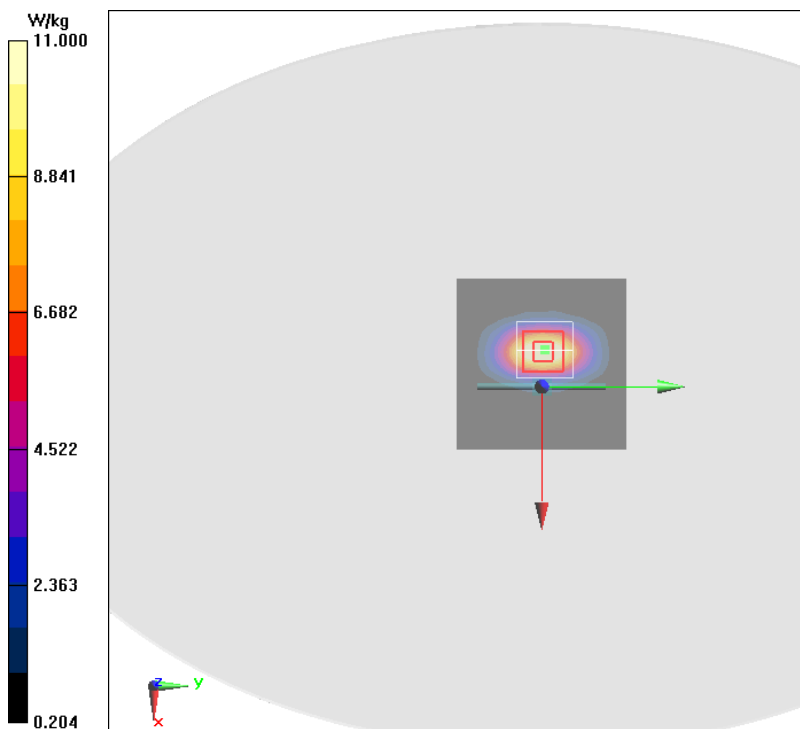

Body 2450 MHz

Date/Time: 2019/7/25

Electronics: DAE4 Sn1244

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.927$ S/m; $\epsilon_r = 54.788$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: CW 2600MHz; Frequency: 2450 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.41, 4.41, 4.41); Calibrated: 9/4/2018

System Validation/Area Scan (91x71x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 15.8 W/kg

System Validation/Zoom Scan (7x7x7) (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.38 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 29.0 W/kg

SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.05 W/kg

Maximum value of SAR (measured) = 15.0 W/kg

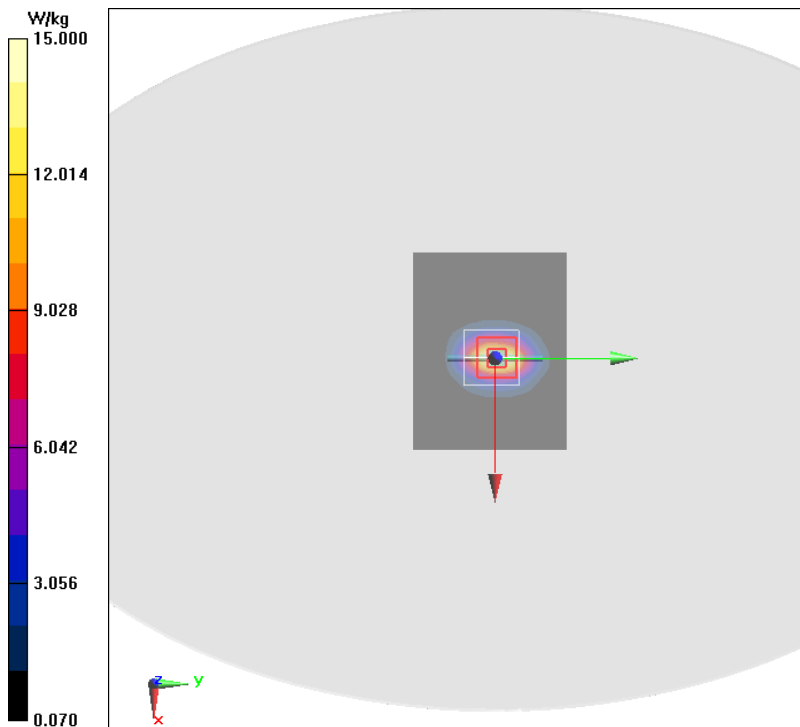

Body 2600MHz

Date/Time: 2019/7/20

Electronics: DAE4 Sn1244

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.112$ S/m; $\epsilon_r = 54.37$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: CW 2600MHz; Frequency: 2600 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(4.19, 4.19, 4.19); Calibrated: 9/4/2018

Body 2600MHz/Area Scan (101x101x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (Measurement) = 16.5 W/kg

Body 2600MHz/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 79.77 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 29.1 W/kg

SAR(1 g) = 13.9 W/kg; SAR(10 g) = 6.22 W/kg

Maximum value of SAR (measured) = 16.1 W/kg

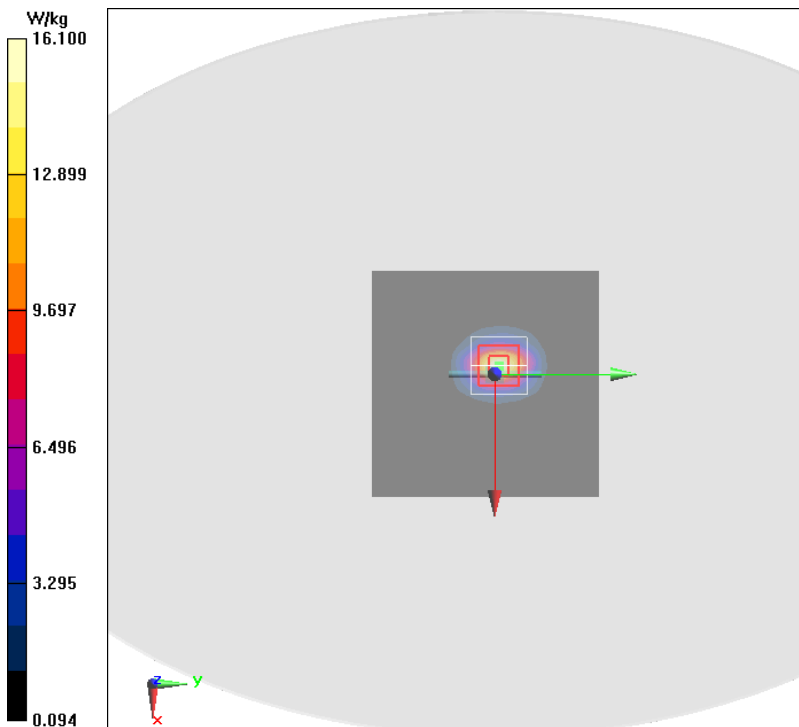

Body 5200 MHz

Date/Time: 2019/7/17

Electronics: DAE4 Sn1244

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.128$ S/m; $\epsilon_r = 50.168$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: 5GHz; Frequency: 5200 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7401ConvF(5.26, 5.26, 5.26); Calibrated: 1/15/2019

System Validation 5200 MHz/Area Scan (71x71x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (Measurement) = 18.2 W/kg

System Validation 5200 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (7x7x7)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 62.94 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 29.3 W/kg

SAR(1 g) = 7.01 W/kg; SAR(10 g) = 1.96 W/kg

Maximum value of SAR (measured) = 18.0 W/kg

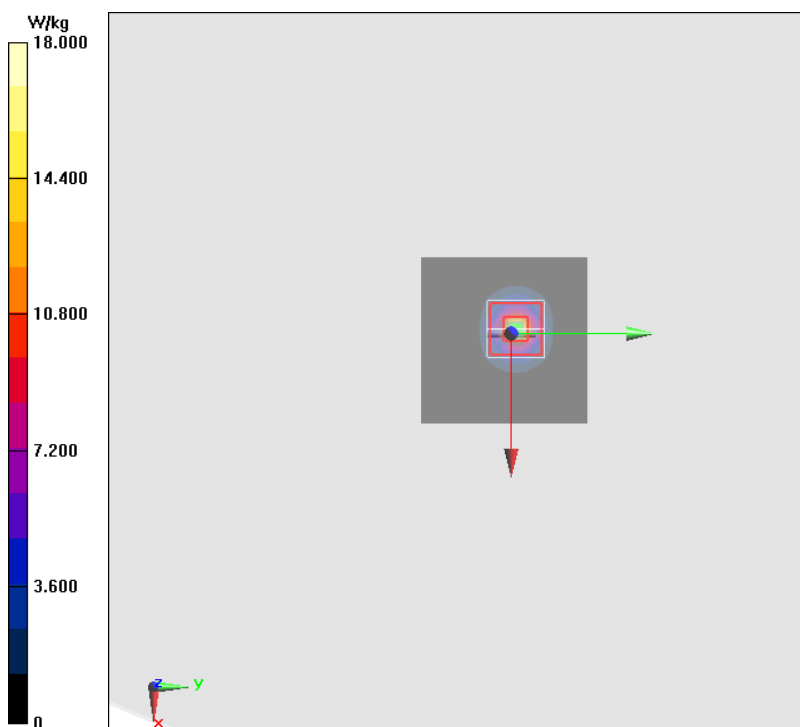

Body 5800 MHz

Date/Time: 2019/7/17

Electronics: DAE4 Sn1244

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.985$ S/m; $\epsilon_r = 48.931$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: CW 5GHz; Frequency: 5800 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7401ConvF(4.69, 4.69, 4.69); Calibrated: 1/15/2019

System Validation 5800 MHz/Area Scan (91x91x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (Measurement) = 17.7 W/kg

System Validation 5800 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm

(7x7x7)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 60.59 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 34.6 W/kg

SAR(1 g) = 7.13 W/kg; SAR(10 g) = 1.96 W/kg


Maximum value of SAR (measured) = 19.7 W/kg

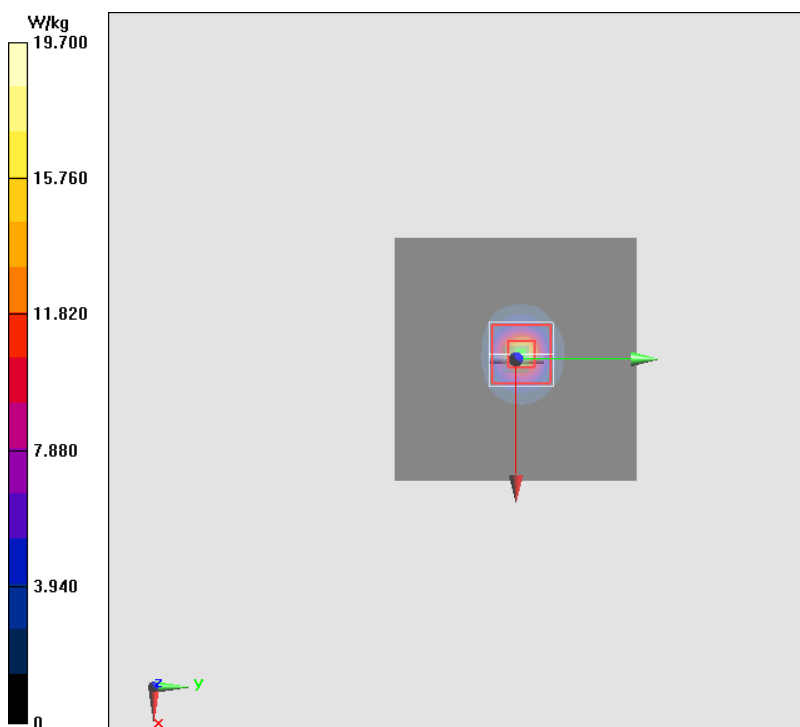

ANNEX C. SAR Measurement Setup

C.1. Measurement Set-up

The DASY5 system for performing compliance tests is illustrated above graphically. This system consists of the following items:

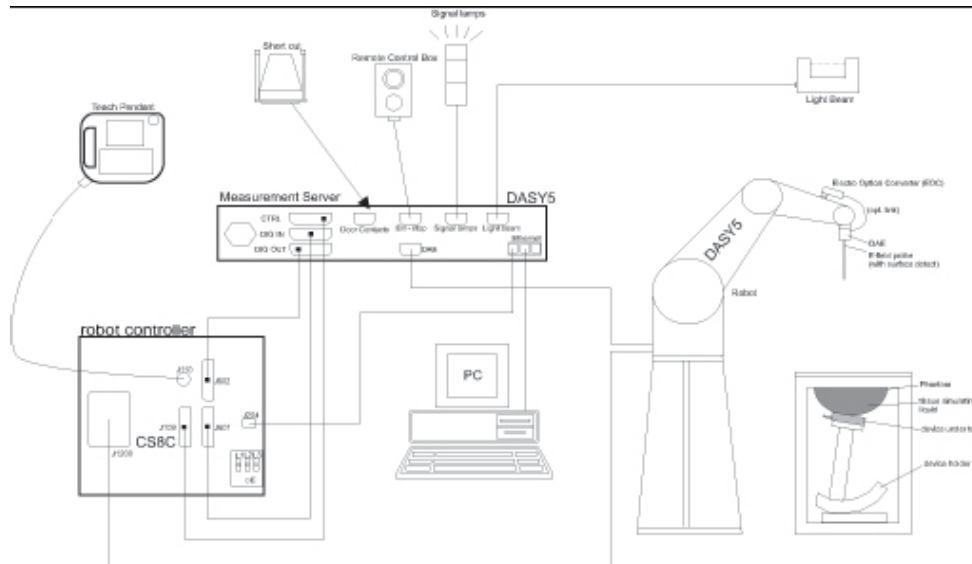

Picture C.1 SAR Lab Test Measurement Set-up

- A standard high precision 6-axis robot (Stäubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as
- warning lamps, etc.

- The phantom, the device holder and other accessories according to the targeted measurement.

C.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY5 software reads the reflection during a software approach and looks for the maximum using 2nd order curve fitting. The approach is stopped at reaching the maximum.

Probe Specifications:

| | |
|-----------------------|--|
| Model: | ES3DV3,EX3DV4 |
| Frequency | 10MHz — 6GHz(EX3DV4) |
| Range: | 10MHz — 4GHz(ES3DV3) |
| Calibration: | In head and body simulating tissue at Frequencies from 835 up to 5800MHz |
| Linearity: | ± 0.2 dB(30 MHz to 4 GHz) for ES3DV3 ± 0.2 dB(30 MHz to 6 GHz) for EX3DV4 |
| Dynamic Range: | 10 mW/kg — 100W/kg |
| Probe Length: | 330 mm |
| Probe Tip | |
| Length: | 20 mm |
| Body Diameter: | 12 mm |
| Tip Diameter: | 2.5 mm (3.9 mm for ES3DV3) |
| Tip-Center: | 1 mm (2.0mm for ES3DV3) |
| Application: | SAR Dosimetry Testing Compliance tests of mobile phones Dosimetry in strong gradient fields |



Picture7-2 Near-field Probe



Picture 7-3 E-field Probe

C.3. E-field Probe Calibration

Each E-Probe/Probe Amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to

a known E-field density (1 mW/cm²) using an RF Signal generator, TEM cell, and RF Power Meter.

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equate to 1 mW/cm².

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where:

Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

ΔT = Temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m³).

C.4. Other Test Equipment

C.4.1. Data Acquisition Electronics(DAE)

The data acquisition electronics consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



PictureC.4: DAE

C.4.2. Robot

The SPEAG DASY system uses the high precision robots (DASY5: RX90L) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchron motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)



Picture C.5 DASY 5

C.4.3. Measurement Server

The Measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128MB), RAM (DASY5: 128MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.



Picture C.6 Server for DASY 5

C.4.4. Device Holder for Phantom

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5mm distance, a positioning uncertainty of $\pm 0.5\text{mm}$ would produce a SAR uncertainty of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.


<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with

the Twin-SAM and ELI phantoms.



Picture C.7: Device Holder

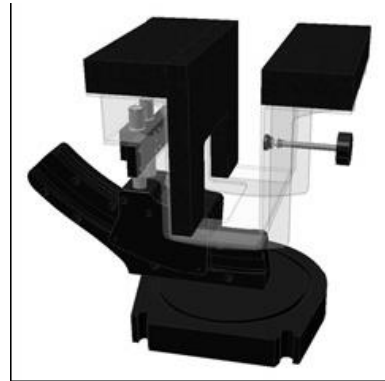

Picture C.8: Laptop Extension Kit

C.4.5. Phantom

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a table. The shape of the shell is based on data from an anatomical study designed to represent the 90th percentile of the population. The phantom enables the dissymmetric evaluation of SAR for both left and right handed handset usage, as well as body-worn usage using the flat phantom region. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. The shell phantom has a 2mm shell thickness (except the ear region where shell thickness increases to 6 mm).

Shell Thickness: 2 ± 0.2 mm

Filling Volume: Approx. 25 liters

Dimensions: 810 x 1000 x 500 mm (H x L x W)

Available: Special




Picture C.9: SAM Twin Phantom

ANNEX D. Position of the wireless device in relation to the phantom

D.1. Body-worn device


A typical example of a body-worn device is a mobile phone, wireless enabled PDA or other battery operated wireless device with the ability to transmit while mounted on a person's body using a carry accessory approved by the wireless device manufacturer.

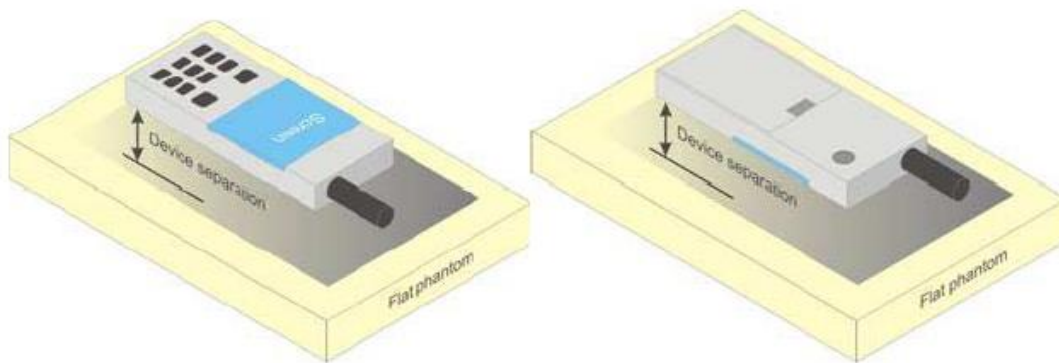

Picture D.1 Test positions for body-worn devices

D.2. Generic device

The SAR evaluation shall be performed for all surfaces of the DUT that are accessible during intended use, as indicated in D2. The separation distance in testing shall correspond to the intended use distance as specified in the user instructions provided by the manufacturer.

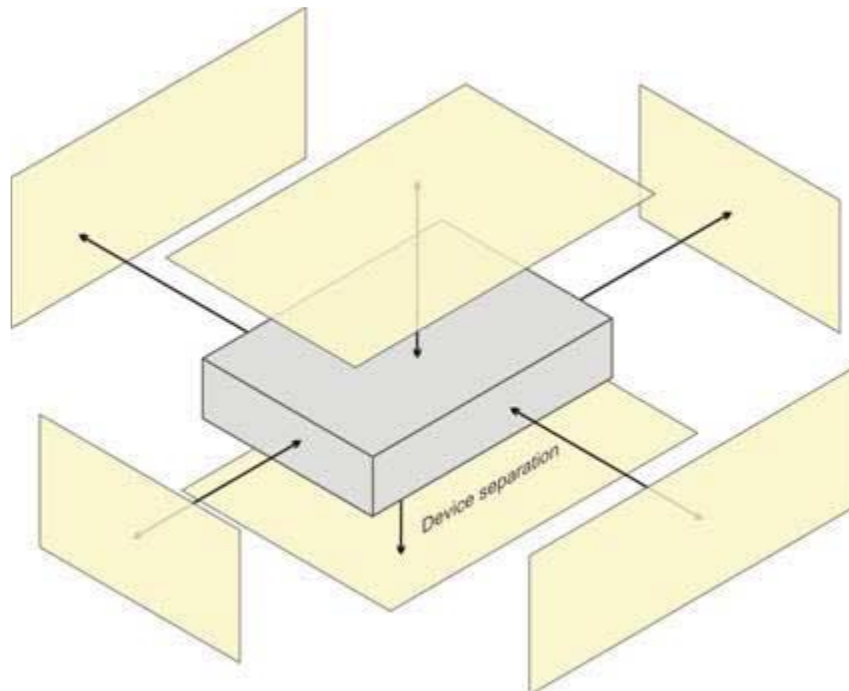

Picture D.2 Test positions for desktop devices

D.3. DUT Setup Photos

Picture D.3 DSY5 system Set-up

Note:

The photos of test sample and test positions show in additional document.

ANNEX E. Equivalent Media Recipes

The liquid used for the frequency range of 800-3000 MHz consisted of water, sugar, salt, preventol, glycol monobutyl and Cellulose. The liquid has been previously proven to be suited for worst-case. The Table E.1 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528 and IEC 62209.

Table E.1: Composition of the Tissue Equivalent Matter

| Frequency (MHz) | 835 Head | 835 Body | 1900 Head | 1900 Body | 2450 Head | 2450 Body |
|--|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| Ingredients (% by weight) | | | | | | |
| Water | 41.45 | 52.5 | 55.242 | 69.91 | 58.79 | 72.60 |
| Sugar | 56.0 | 45.0 | \ | \ | \ | \ |
| Salt | 1.45 | 1.4 | 0.306 | 0.13 | 0.06 | 0.18 |
| Preventol | 0.1 | 0.1 | \ | \ | \ | \ |
| Cellulose | 1.0 | 1.0 | \ | \ | \ | \ |
| Glycol Monobutyl | \ | \ | 44.452 | 29.96 | 41.15 | 27.22 |
| Dielectric Parameters Target Value | $\epsilon=41.5$ $\sigma=0.90$ | $\epsilon=55.2$ $\sigma=0.97$ | $\epsilon=40.0$ $\sigma=1.40$ | $\epsilon=53.3$ $\sigma=1.52$ | $\epsilon=39.2$ $\sigma=1.80$ | $\epsilon=52.7$ $\sigma=1.95$ |

ANNEX F. System Validation

The SAR system must be validated against its performance specifications before it is deployed.

When SAR probes, system components or software are changed, upgraded or recalibrated, these must be validated with the SAR system(s) that operates with such components.

Table F.1: System Validation Part 1

| System No. | Probe SN. | Liquid name | Validation date | Frequency point | Permittivity ϵ | Conductivity σ (S/m) |
|------------|-----------|---------------|-----------------|-----------------|-------------------------|-----------------------------|
| 1 | 3252 | Body 750 MHz | 2019-06-28 | 750 MHz | 57.721 | 0.916 |
| 2 | 3252 | Body 835 MHz | 2019-06-28 | 835 MHz | 56.731 | 0.998 |
| 3 | 3252 | Body 1800 MHz | 2019-07-05 | 1800 MHz | 55.227 | 1.479 |
| 4 | 3252 | Body 1900 MHz | 2019-07-05 | 1900 MHz | 52.274 | 1.485 |
| 5 | 3252 | Body 2450 MHz | 2019-07-25 | 2450 MHz | 54.788 | 1.927 |
| 6 | 3252 | Body 2600MHz | 2019-07-20 | 2600MHz | 54.370 | 2.112 |
| 7 | 3252 | Body 5200MHz | 2019-07-17 | 5200MHz | 50.168 | 5.128 |
| 8 | 3252 | Body 5800MHz | 2019-07-17 | 5800MHz | 48.931 | 5.985 |

Table F.2: System Validation Part 2

| | | | |
|----------------|-----------------|------|------|
| CW Validation | Sensitivity | PASS | PASS |
| | Probe linearity | PASS | PASS |
| | Probe Isotropy | PASS | PASS |
| Mod Validation | MOD.type | GMSK | GMSK |
| | MOD.type | OFDM | OFDM |
| | Duty factor | PASS | PASS |
| | PAR | PASS | PASS |

ANNEX G. Probe and DAE Calibration Certificate



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
 E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)



中国认可
 国际互认
 校准
 CALIBRATION
 CNAS L0570

Client : **ECIT**

Certificate No: **Z18-60529**

| CALIBRATION CERTIFICATE | | | |
|--|--|--|---|
| Object | DAE4 - SN: 1244 | | |
| Calibration Procedure(s) | FF-Z11-002-01 Calibration Procedure for the Data Acquisition Electronics (DAEx) | | |
| Calibration date: | December 03, 2018 | | |
| <p>This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p> | | | |
| Primary Standards | ID # | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
| Process Calibrator 753 | 1971018 | 20-Jun-18 (CTTL, No.J18X05034) | June-19 |
| Calibrated by: | Name | Function | Signature |
| | Yu Zongying | SAR Test Engineer |  |
| Reviewed by: | Lin Hao | SAR Test Engineer |  |
| Approved by: | Qi Dianyuan | SAR Project Leader |  |
| Issued: December 05, 2018 | | | |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. | | | |