



TEST REPORT

Report Reference No...... : **TRE1605010301** R/C.....:56190

FCC ID..... : **2AH6PSNAP360**

Applicant's name..... : **Miracle Elite (HK) Limited**

Address..... : 10/F Woo Sing Kee industrial Building No.138 Wai Yip Street Kwun Tong Hong Kong

Manufacturer..... : Miracle Elite (HK) Limited

Address..... : 10/F Woo Sing Kee industrial Building No.138 Wai Yip Street Kwun Tong Hong Kong

Test item description : **Action Camera**

Trade Mark : HvyourOwn

Model/Type reference..... : snapcam360

Listed Model(s) : -

Standard : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**

Date of receipt of test sample..... : May 20, 2016

Date of testing..... : May 21, 2016- Jun 03, 2016

Date of issue..... : Jun 03, 2016

Result..... : **PASS**

Compiled by
(position+printedname+signature)....: File administrators Candy Liu *Candy Liu*

Supervised by
(position+printedname+signature)....: Project Engineer Jeff Sun *Jeff Sun*

Approved by
(position+printedname+signature)....: RF Manager Hans Hu *Hans Hu*

Testing Laboratory Name : **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

*The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.*

Contents

<u>1.</u>	<u>APPLICABLE STANDARDS AND TEST DESCRIPTION</u>	<u>3</u>
1.1.	Applicable Standards	3
1.2.	Test Description	3
<u>2.</u>	<u>SUMMARY</u>	<u>4</u>
2.1.	Client Information	4
2.2.	Product Description	4
2.3.	Operation state	5
2.4.	EUT configuration	5
2.5.	Modifications	5
<u>3.</u>	<u>TEST ENVIRONMENT</u>	<u>6</u>
3.1.	Address of the test laboratory	6
3.2.	Test Facility	6
3.3.	Equipments Used during the Test	7
3.4.	Environmental conditions	8
3.5.	Statement of the measurement uncertainty	8
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>9</u>
4.1.	Antenna requirement	9
4.2.	Conducted Emission (AC Main)	10
4.3.	Conducted Peak Output Power	13
4.4.	Power Spectral Density	14
4.5.	6dB bandwidth	17
4.6.	Restricted band	21
4.7.	Band edge and Spurious Emission (conducted)	30
4.8.	Spurious Emission (radiated)	43
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>60</u>
<u>6.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>62</u>

1. APPLICABLE STANDARDS AND TEST DESCRIPTION

1.1. Applicable Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB 558074 D01 DTS Meas Guidance v03r05](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating under § 15.247

1.2. Test Description

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
Line Conducted Emission (AC Main)	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
Power Spectral Density	15.247 (e)	Pass
6dB Bandwidth	15.247 (a)(2)	Pass
Restricted band	15.247(d)/15.205	Pass
Spurious Emission	15.247(d)/15.209	Pass

Remark: The measurement uncertainty is not included in the test result.

2. SUMMARY

2.1. Client Information

Applicant:	Miracle Elite (HK) Limited
Address:	10/F Woo Sing Kee industrial Building No.138 Wai Yip Street Kwun Tong Hong Kong
Manufacturer:	Miracle Elite (HK) Limited
Address:	10/F Woo Sing Kee industrial Building No.138 Wai Yip Street Kwun Tong Hong Kong

2.2. Product Description

Name of EUT	Action Camera
Trade Mark:	HvyourOwn
Model No.:	snapcam360
Listed Model(s):	-
Power supply:	DC 3.7V for internal battery
Adapter information:	-
Hardware version:	-
Software version:	-
WIFI	
Supported type:	802.11b/802.11g/802.11n(H20)/802.11n(H40)
Modulation:	802.11b: DSSS 802.11g/802.11n(H20)/802.11n(H40):OFDM
Operation frequency:	802.11b/802.11g/802.11n(H20): 2412MHz~2462MHz 802.11n(H40): 2422MHz~2452MHz
Channel number:	802.11b/802.11g/802.11n(H20): 11 802.11n(H40): 7
Channel separation:	5MHz
Antenna type:	Internal Antenna
Antenna gain:	5 dBi

2.3. Operation state

◆ Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

Channel	Frequency (MHz)
01	2412
02	2417
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452
10	2457
11	2462

◆ Test mode

For RF test items:

The engineering test program was provided and enabled to make EUT continuous transmit/receive. We are testing for EUT positions (X-axis, Y-axis and Z-axis), and only recording worse case positions.

For AC power line conducted emissions:

Charging mode .

2.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

<input type="radio"/>	PowerCable	Length (m) :	/
		Shield :	/
		Detachable :	/
<input type="radio"/>	Multimeter	Manufacturer :	/
		Model No. :	/

2.5. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.
Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China
Phone: 86-755-26748019 Fax: 86-755-26748089

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: February 28, 2015. Valid time is until February 27, 2018.

A2LA-Lab Cert. No. 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until December 31, 2016.

FCC-Registration No.: 317478

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 317478, Renewal date Jul. 18, 2014, valid time is until Jul. 18, 2017.

IC-Registration No.: 5377A&5377B

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A on Dec. 31, 2013, valid time is until Dec. 31, 2016.

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377B on Dec.03, 2014, valid time is until Dec.03, 2017.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

VCCI

Radiated disturbance above 1GHz measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-292. Date of Registration: Dec. 24, 2013. Valid time is until Dec. 23, 2016.

Telecommunication Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-1837. Date of Registration: May 07, 2013. Valid time is until May 06, 2016.

DNV

Shenzhen Huatongwei International Inspection Co., Ltd. has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025 (2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until Aug. 24, 2016.

3.3. Equipments Used during the Test

Line Conducted Emission (AC Main)						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1	EMI Test Receiver	R&S	ESCI	101247	11/3/2015	11/2/2016
2	Artificial Mains	SCHWARZBECK	NNLK 8121	573	11/3/2015	11/2/2016
3	Pulse Limiter	R&S	ESH3-Z2	101488	11/3/2015	11/2/2016
4	Test Software	R&S	ES-K1	N/A	N/A	N/A
5	Adapter (see note)	HUNTKEY	HW-050100C2W	HWHKAPE51309936	-	-

NOTE : Adapter is Auxiliary equipment.

Maximum Peak Output Power / Power Spectral Density / 6dB Bandwidth / Band Edge Compliance of RF Emission / Spurious RF Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal
1	Spectrum Analyzer	Rohde&Schwarz	FSP	1164.4391.40	2015/11/02
2	Climate Chamber	ESPEC	EL-10KA	05107008	2015/11/02
3	Test cable	Junkosha Inc.	J12J102248	JUL-06-14-016	2015/12/05
4	Temporary antenna connector	/	/	/	/

NOTE: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	Rohde&Schwarz	ESI 26	100009	2015/11/02
2	RF Test Panel	Rohde&Schwarz	TS / RSP	335015/ 0017	N/A
3	EMI Test Software	Rohde&Schwarz	ESK1	N/A	N/A
4	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	2015/11/08
5	Horn Antenna	ShwarzBeck	9120D	1011	2015/11/08
6	Loop Antenna	Rohde&Schwarz	HZ-9	838622\013	2015/11/08
7	Broadband Horn Antenna	ShwarzBeck	BBHA9170	BBHA9170472	2015/11/08
8	Broadband Pre-amplifier	SCHWARZBECK	BBV 9718	9718-247	2015/11/02
9	Broadband Pre-amplifier	SCHWARZBECK	BBV 9721	9721-102	2015/11/02
10	Turn Table	MATURO	TT2.0	----	N/A
11	Antenna Mast	MATURO	TAM-4.0-P	----	N/A
12	EMI Test Software	Audix	E3	N/A	N/A
13	Test cable	Siva Cables Italy	RG 58A/U	W14.02	2015/12/05

The Cal.Interval was one year

3.4. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	1.60 dB	(1)
Radiated spurious emission 9KHz-40 GHz	2.20 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Radiated Emission 1~18GHz	5.16 dB	(1)
Radiated Emission 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

4. TEST CONDITIONS AND RESULTS

4.1. Antenna requirement


Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Test Result:

The antenna is integral antenna, the best case gain of the antenna is 5 dBi

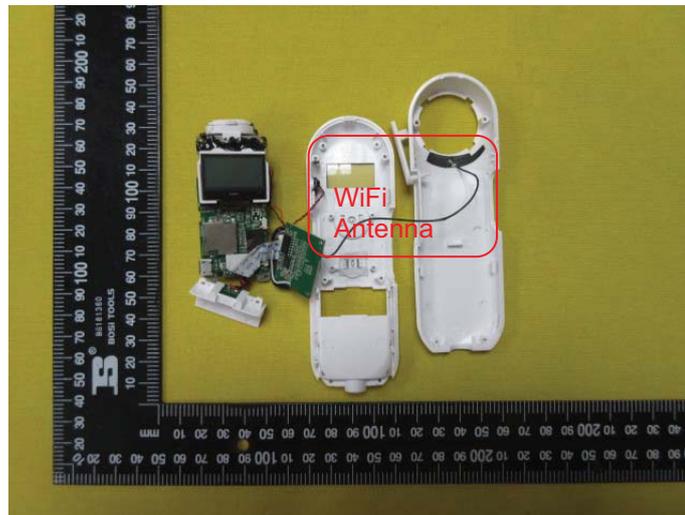

4.2. Conducted Emission (AC Main)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

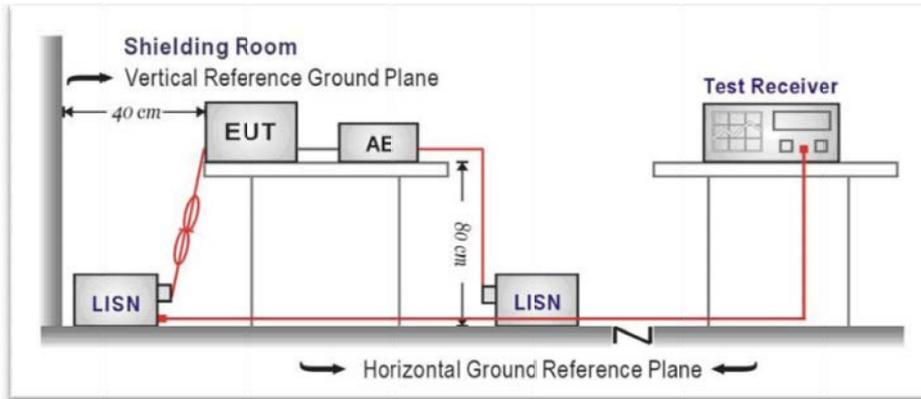


TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.


TEST RESULTS

Test mode: Charging Polarization N

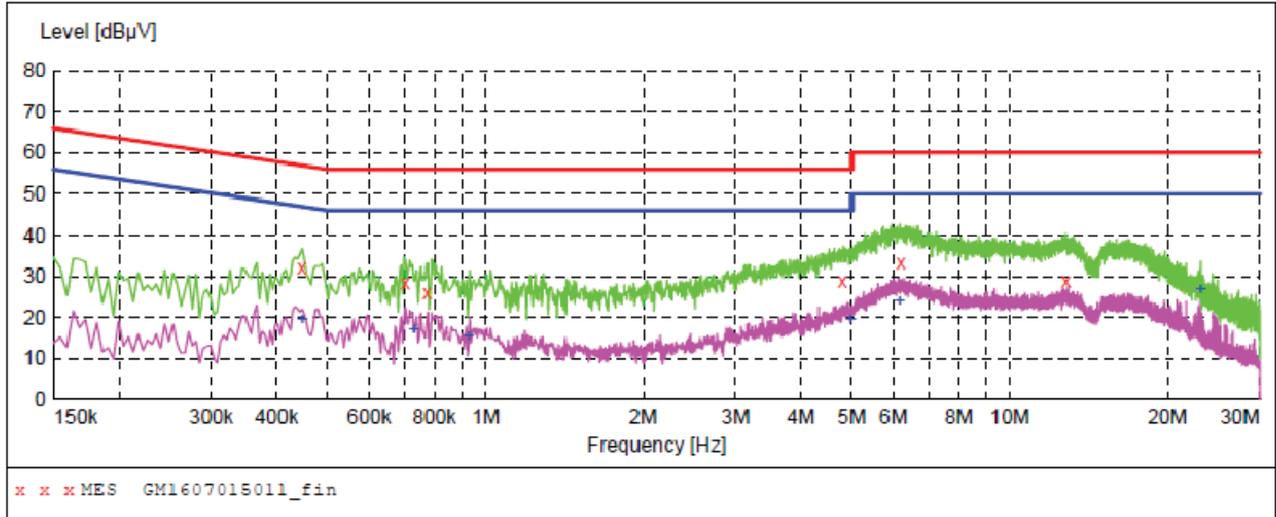

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.447000	32.00	10.2	57	24.9	QP	N	GND
0.703500	28.50	10.2	56	27.5	QP	N	GND
0.775500	26.00	10.2	56	30.0	QP	N	GND
4.798500	29.00	10.5	56	27.0	QP	N	GND
6.202500	33.30	10.5	60	26.7	QP	N	GND
12.808500	28.80	10.7	60	31.2	QP	N	GND
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.447000	19.60	10.2	47	27.3	AV	N	GND
0.730500	17.00	10.2	46	29.0	AV	N	GND
0.928500	15.30	10.3	46	30.7	AV	N	GND
4.969500	19.40	10.5	46	26.6	AV	N	GND
6.162000	23.90	10.5	50	26.1	AV	N	GND
23.131500	27.00	10.8	50	23.0	AV	N	GND

Test mode: Charging Polarization L

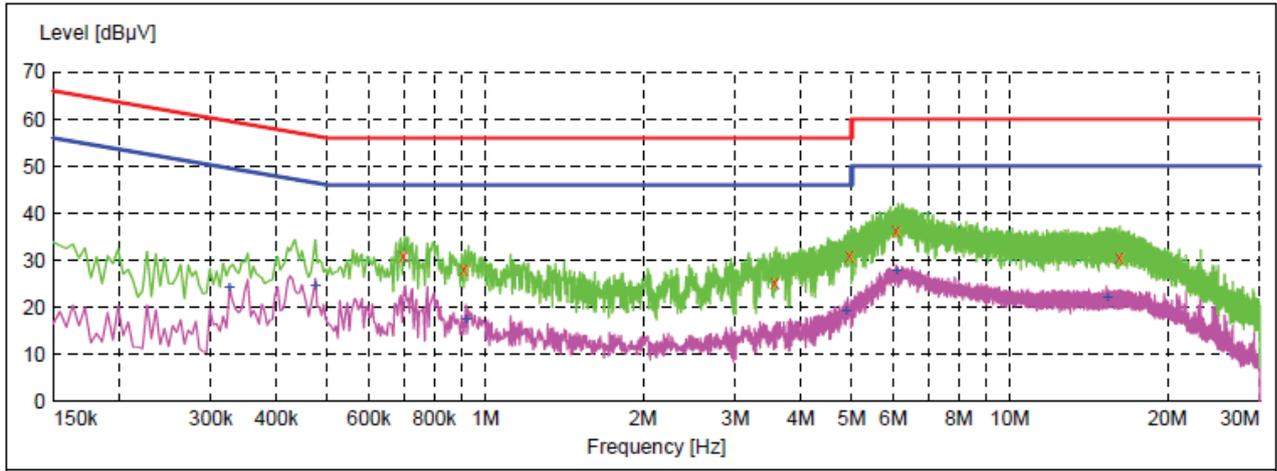

x x x MES GM1607015012_fin


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.699000	30.80	10.2	56	25.2	QP	L1	GND
0.910500	28.00	10.2	56	28.0	QP	L1	GND
3.565500	25.10	10.4	56	30.9	QP	L1	GND
4.960500	31.00	10.5	56	25.0	QP	L1	GND
6.081000	36.40	10.5	60	23.6	QP	L1	GND
16.206000	30.50	10.7	60	29.5	QP	L1	GND
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.325500	24.20	10.2	50	25.4	AV	L1	GND
0.474000	24.60	10.2	46	21.8	AV	L1	GND
0.919500	17.50	10.2	46	28.5	AV	L1	GND
4.875000	19.20	10.5	46	26.8	AV	L1	GND
6.085500	27.60	10.5	50	22.4	AV	L1	GND
15.333000	22.00	10.7	50	28.0	AV	L1	GND

4.3. Conducted Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): **30dBm**:

TEST CONFIGURATION

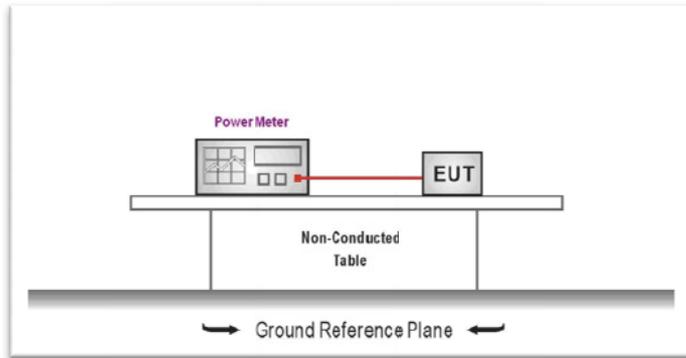

TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10: 2013 and KDB 558074 D01 for compliance to FCC 47CFR 15.247 requirements.
2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector
4. Record the measurement data.

TEST RESULTS

Type	Channel	Output power (dBm)	Limit (dBm)	Result
802.11b	01	15.10	30.00	Pass
	06	17.68		
	11	17.72		
802.11g	01	15.13	30.00	Pass
	06	14.97		
	11	15.92		
802.11n(H20)	01	15.08	30.00	Pass
	06	15.49		
	11	15.32		
802.11n(H40)	03	14.81	30.00	Pass
	06	14.70		
	09	15.24		


4.4. Power Spectral Density

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST CONFIGURATION

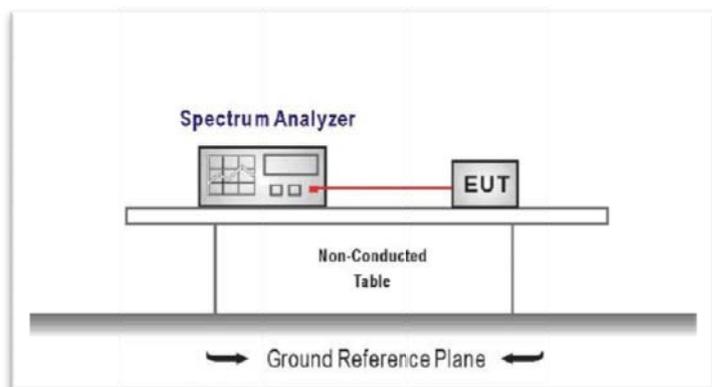







TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input,
2. Configure the spectrum analyzer as shown below:
Center frequency=DTS channel center frequency
Span =1.5 times the DTS bandwidth
RBW = 3 kHz ≤ RBW ≤ 100 kHz, VBW ≥ 3 × RBW
Sweep time = auto couple
Detector = peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST RESULTS







Type	Channel	Power Spectral Density(dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	01	-12.42	8.00	Pass
	06	-10.44		
	11	-10.39		
802.11g	01	-17.95	8.00	Pass
	06	-18.61		
	11	-17.59		
802.11n(H20)	01	-17.50	8.00	Pass
	06	-18.52		
	11	-18.26		
802.11n(H40)	03	-22.01	8.00	Pass
	06	-20.59		
	09	-19.18		

Test plot as follows:

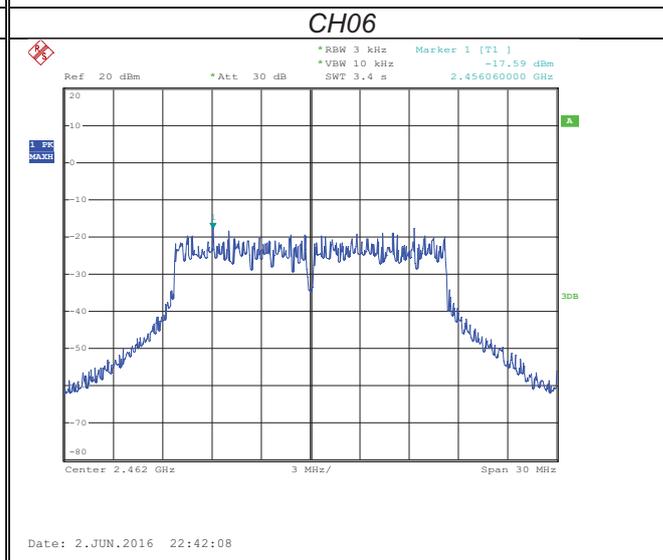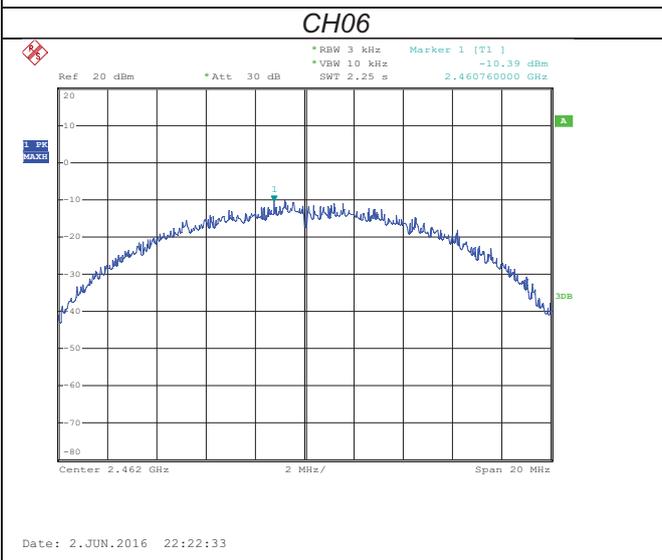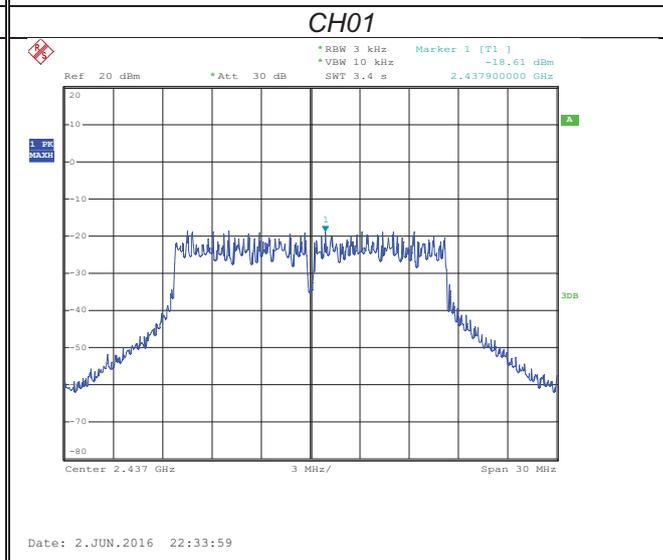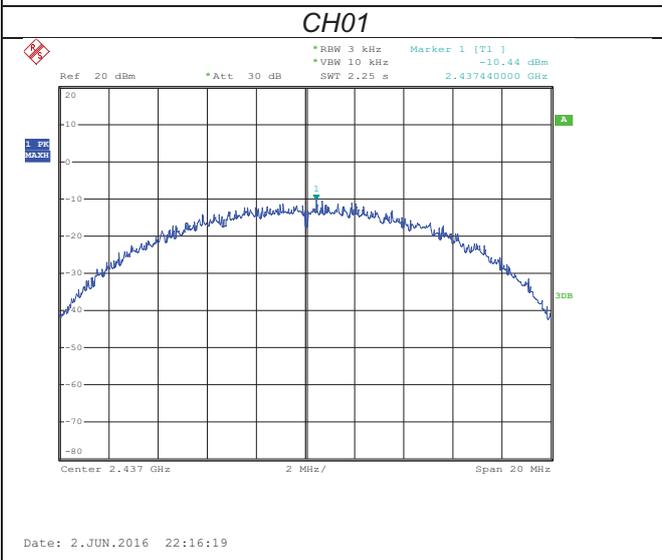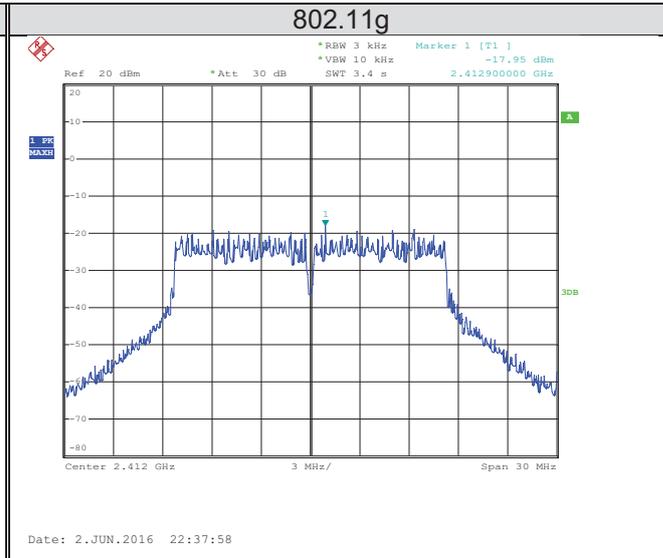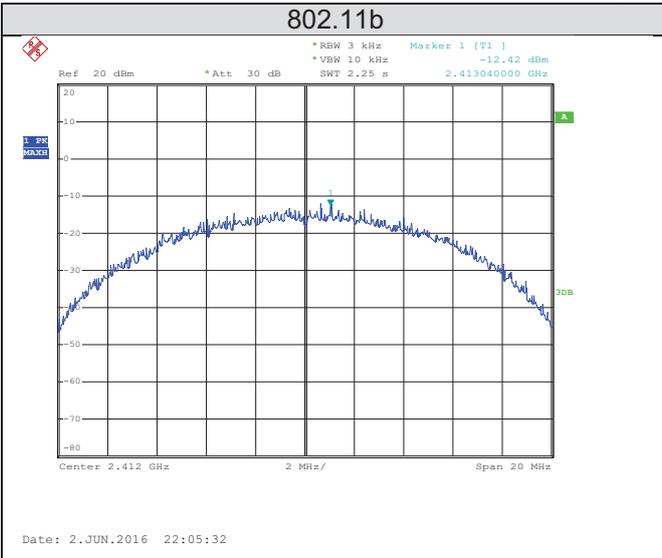

CH11

CH11

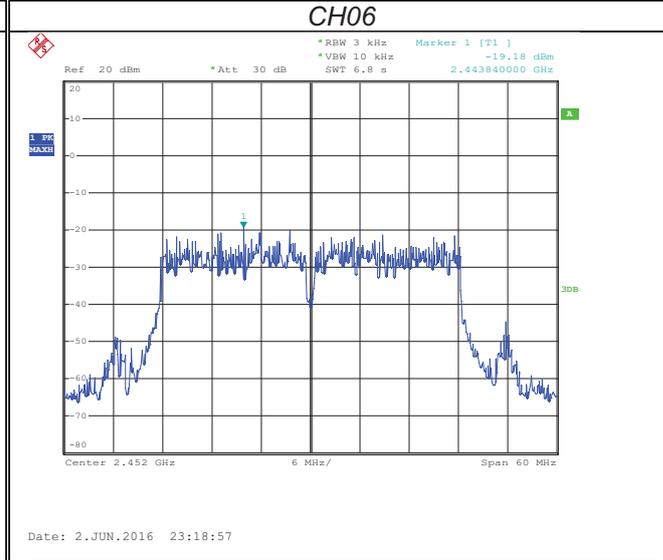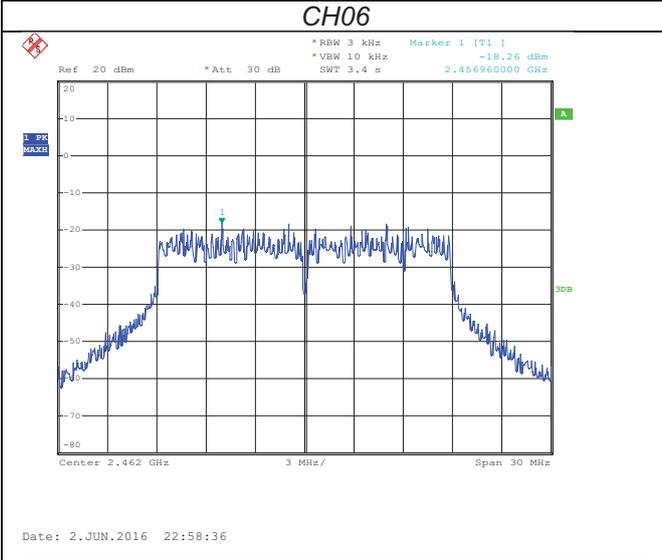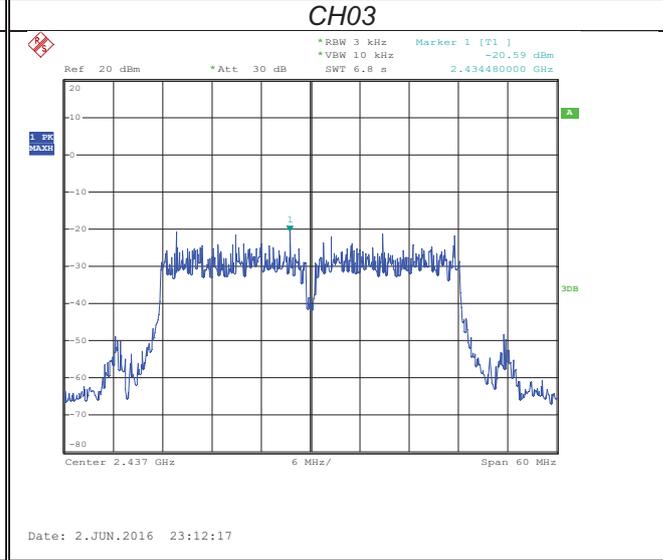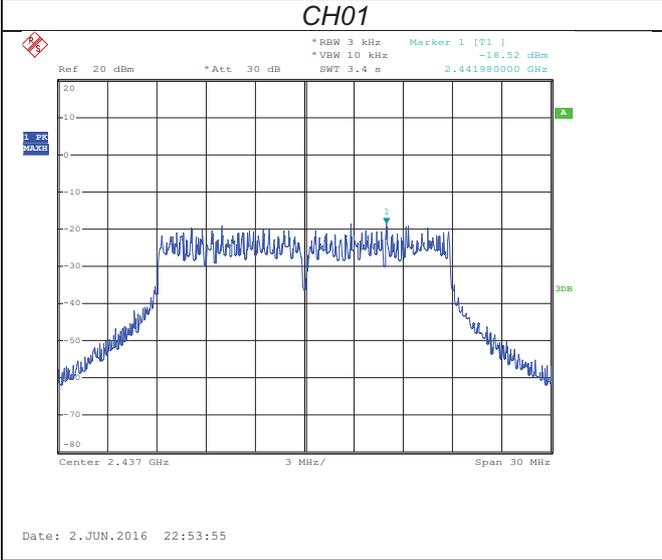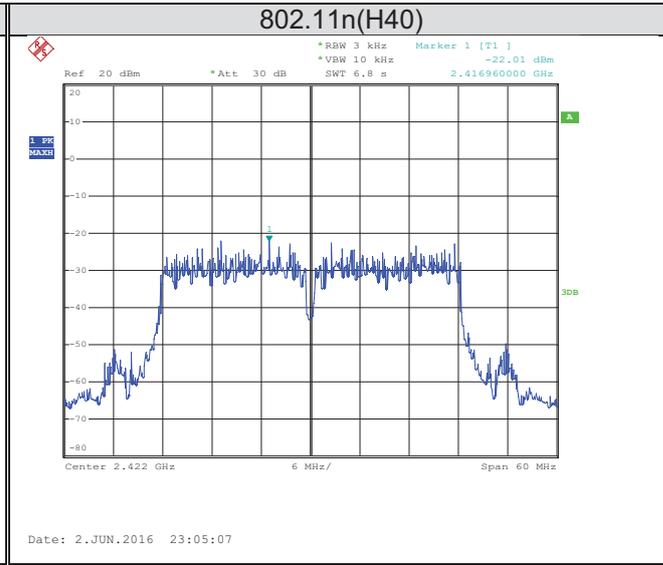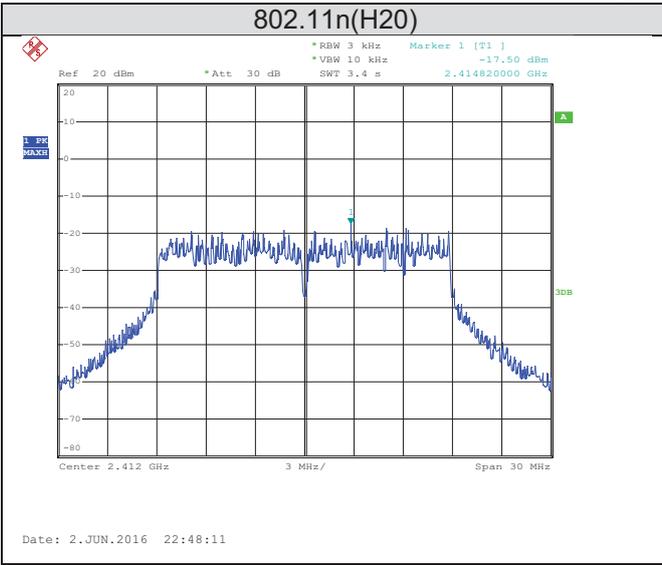

CH11


CH09

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2):

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST CONFIGURATION

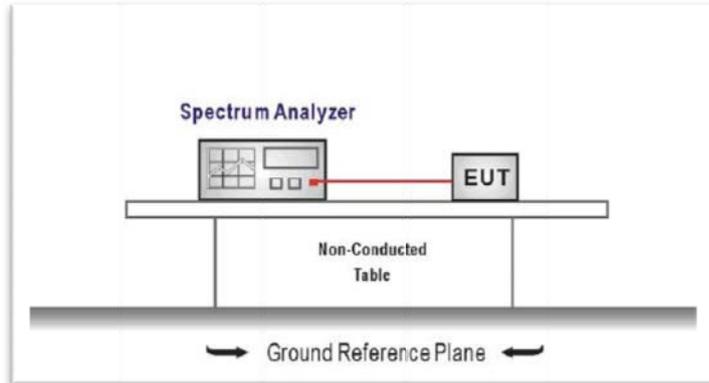





TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency = DTS channel center frequency
Span = 2 x DTS bandwidth
RBW = 100 kHz, VBW ≥ 3 x RBW
Sweep time = auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

TEST RESULTS







Type	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11b	01	10.26	≥ 500	Pass
	06	10.20		
	11	10.50		
802.11g	01	16.56	≥ 500	Pass
	06	16.50		
	11	16.50		
802.11n(H20)	01	17.76	≥ 500	Pass
	06	17.76		
	11	17.76		
802.11n(H40)	03	35.88	≥ 500	Pass
	06	35.88		
	09	35.76		

Test plot as follows:

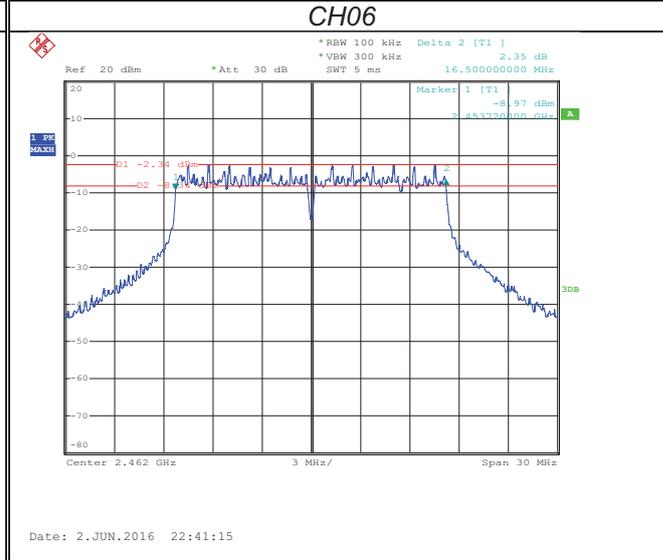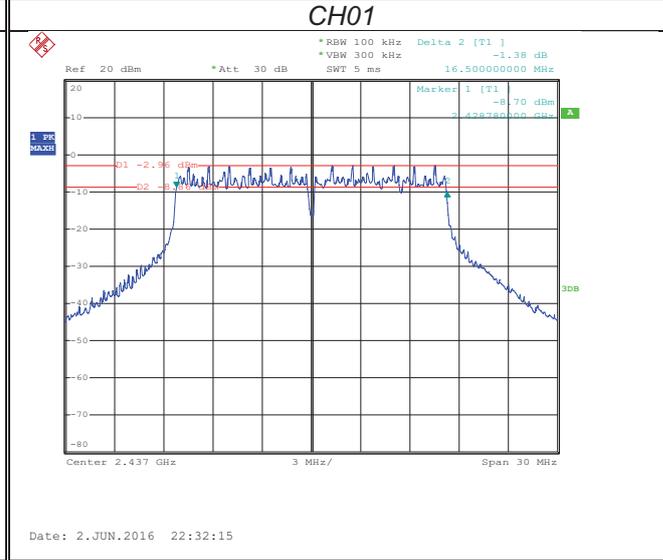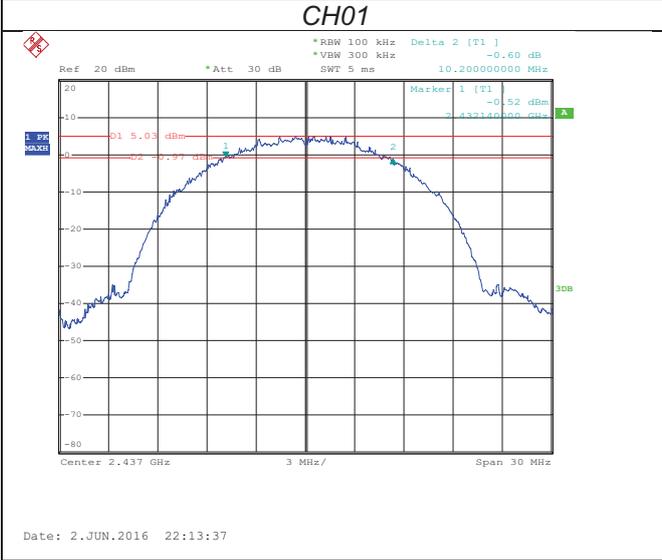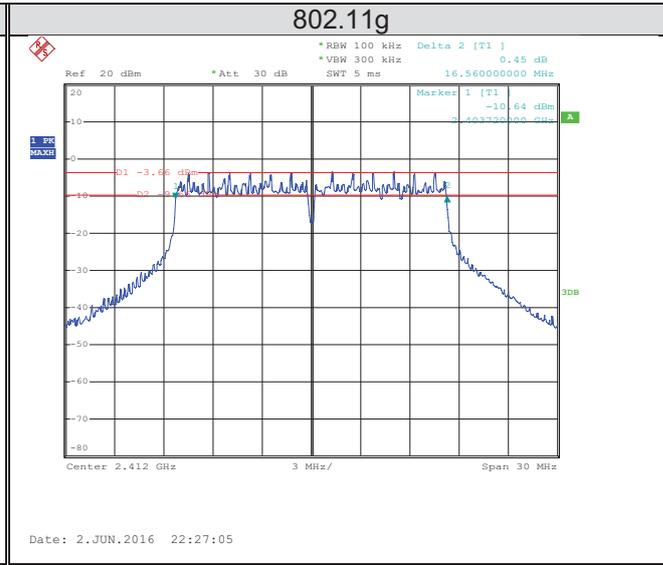

CH11

CH11

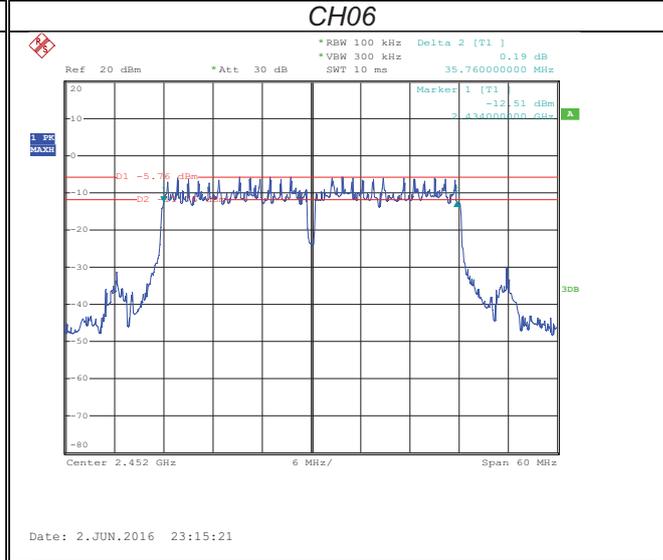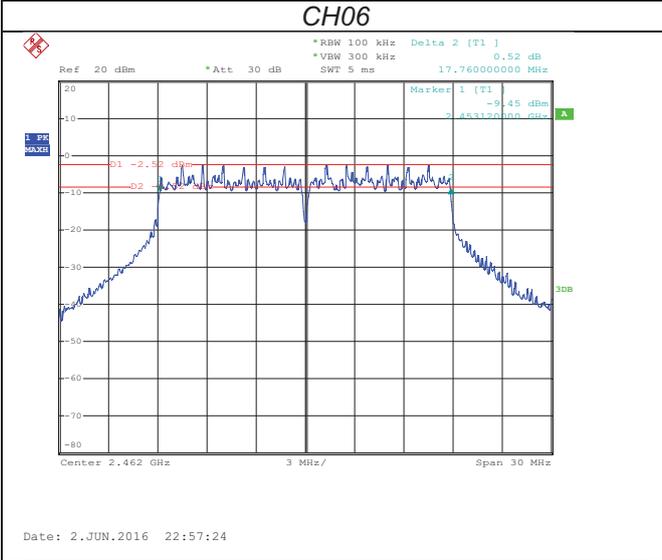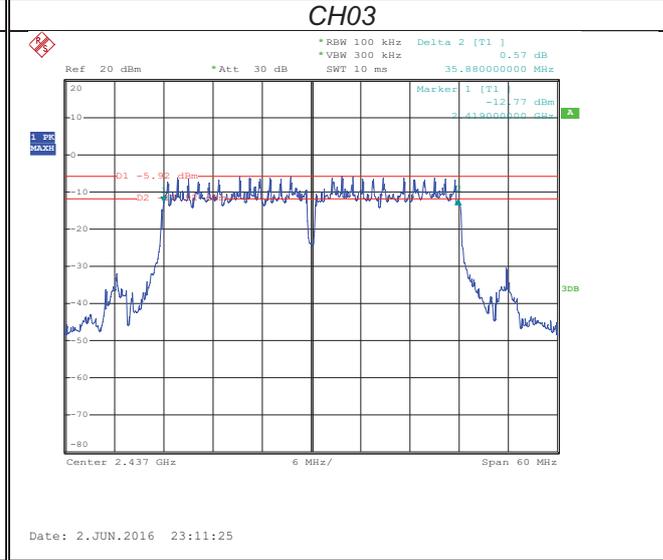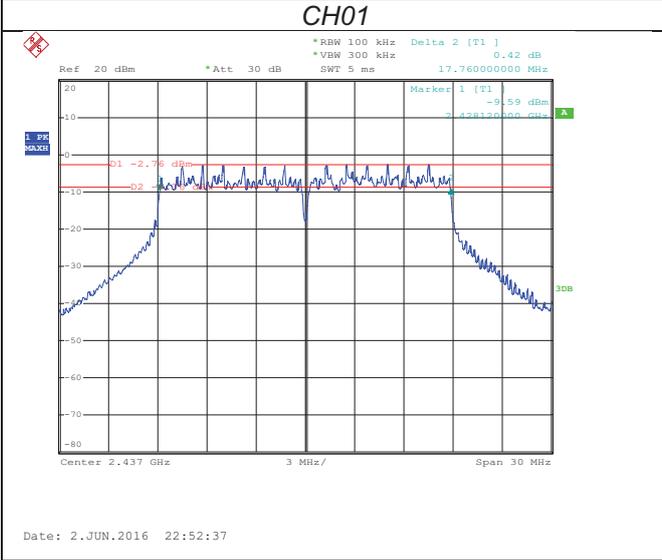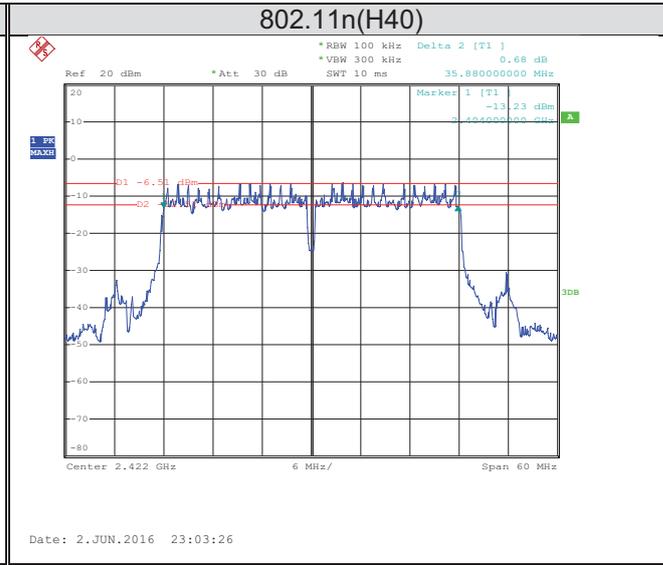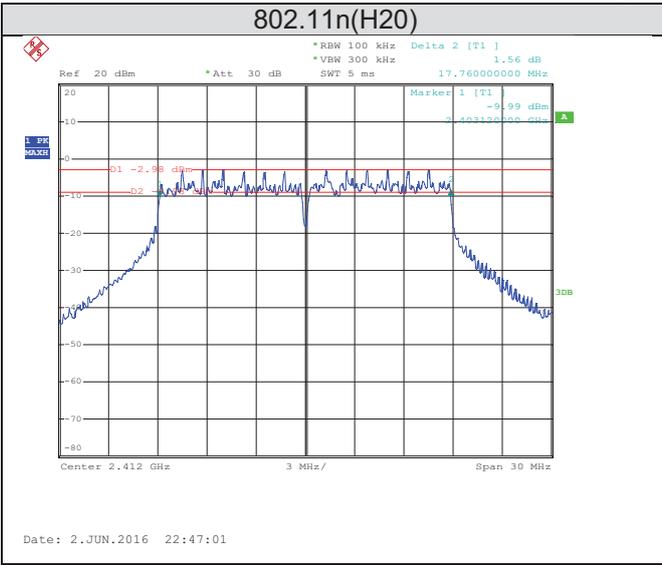

CH11

CH09


4.6. Restricted band

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d)::

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

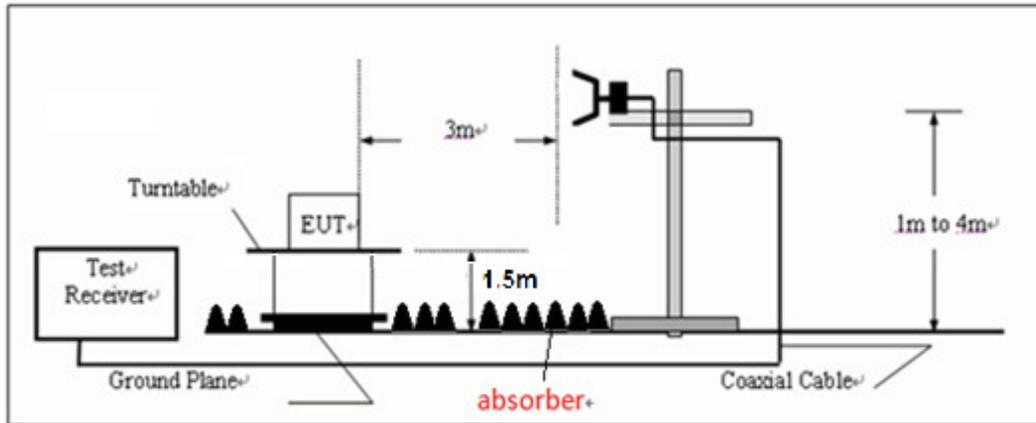

TEST PROCEDURE


1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The Spectrum Analyzer set as follow:
RBW=1MHz, VBW=3MHz
Detector: Peak
6. Repeat step 2) through step 4) for Spectrum Analyzer set as follow :
RBW=1MHz, VBW=3MHz
Detector: Average

TEST RESULTS

Note: Level = Read + Antenna Factor + Cable Loss - Preamp Factor


802.11b for Left

Vertical- Peak

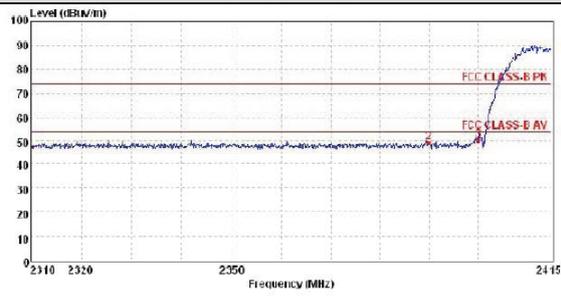


Mark	Frequency MHz	Reading dBu/m	Antenna dB	Cable dB	Preamp dB	Level dBu/m	Limit dBu/m	Over limit	Remark
1	2310.00	14.10	27.27	6.68	0.00	48.05	74.00	-25.95	Peak
2	2390.01	15.02	27.53	6.81	0.00	49.36	74.00	-24.64	Peak
3	2400.02	16.18	27.57	6.83	0.00	59.58	74.00	-23.42	Peak

Horizontal- Peak

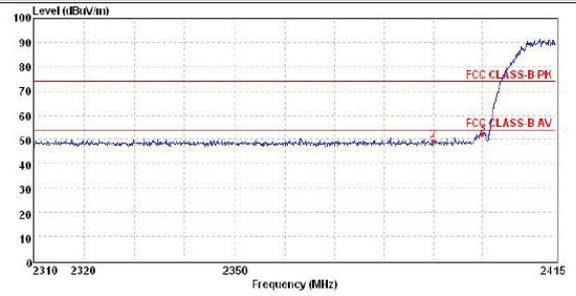


Mark	Frequency MHz	Reading dBu/m	Antenna dB	Cable dB	Preamp dB	Level dBu/m	Limit dBu/m	Over limit	Remark
1	2310.00	13.33	27.27	6.68	0.00	47.28	74.00	-26.72	Peak
2	2390.01	14.95	27.53	6.81	0.00	49.29	74.00	-24.71	Peak
3	2400.02	17.81	27.57	6.83	0.00	52.21	74.00	-21.79	Peak

Vertical- Average

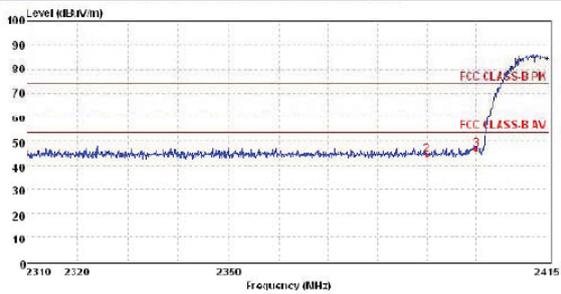

Mark	Frequency MHz	Reading dBu/m	Antenna dB	Cable dB	Preamp dB	Level dBu/m	Limit dBu/m	Over limit	Remark
1	2310.00	11.72	27.27	6.68	0.00	45.67	54.00	-8.33	Average
2	2390.01	10.14	27.53	6.81	0.00	44.46	54.00	-9.52	Average
3	2400.02	12.36	27.57	6.83	0.00	46.76	54.00	-7.24	Average


Horizontal- Average

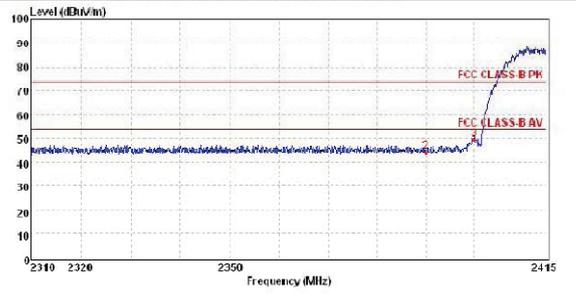

Mark	Frequency MHz	Reading dBu/m	Antenna dB	Cable dB	Preamp dB	Level dBu/m	Limit dBu/m	Over limit	Remark
1	2310.00	11.18	27.27	6.68	0.00	45.13	54.00	-8.87	Average
2	2390.01	9.98	27.53	6.81	0.00	44.32	54.00	-9.68	Average
3	2400.02	14.97	27.57	6.83	0.00	49.37	54.00	-4.63	Average


802.11b for Right

Vertical- Peak

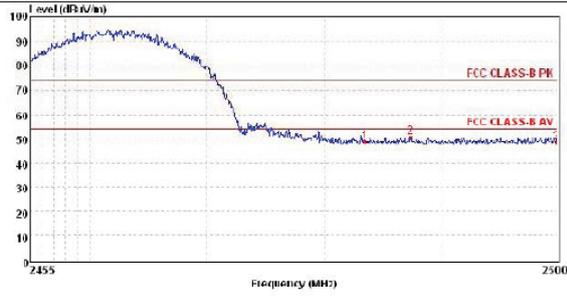


Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over Limit	Remark
1	2483.48	14.05	27.85	6.96	0.00	48.86	74.00	-25.14	Peak
2	2487.41	15.64	27.85	6.96	0.00	50.45	74.00	-23.55	Peak
3	2500.00	13.57	27.90	6.98	0.00	48.15	71.00	-22.85	Peak

Horizontal- Peak

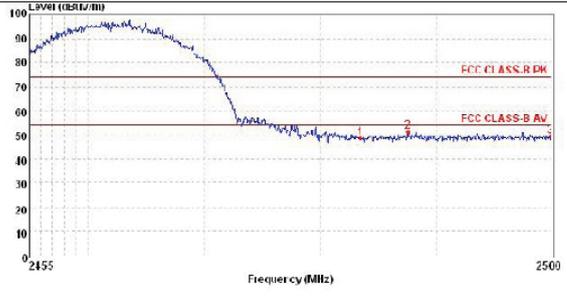


Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over Limit	Remark
1	2483.48	14.02	27.85	6.96	0.00	48.83	74.00	-25.17	Peak
2	2487.59	16.47	27.85	6.96	0.00	51.28	74.00	-22.72	Peak
3	2500.00	14.02	27.90	6.98	0.00	49.50	74.00	-24.50	Peak

Vertical- Average

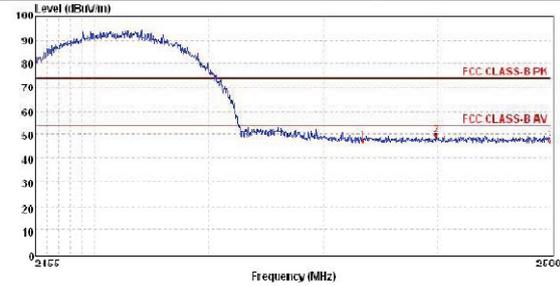


Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over Limit	Remark
1	2483.48	12.54	27.85	6.96	0.00	47.35	54.00	-6.65	Average
2	2489.89	14.90	27.88	6.96	0.00	49.74	54.00	-4.26	Average
3	2500.00	11.92	27.90	6.98	0.00	46.80	54.00	-7.20	Average

Horizontal- Average

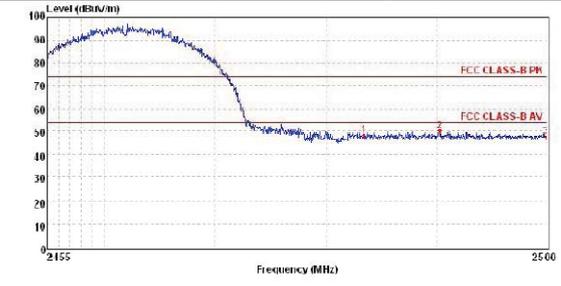


Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over Limit	Remark
1	2483.48	13.41	27.85	6.96	0.00	48.22	54.00	-5.78	Average
2	2490.30	15.19	27.88	6.96	0.00	50.03	54.00	-3.97	Average
3	2500.00	12.67	27.90	6.98	0.00	47.55	54.00	-6.45	Average

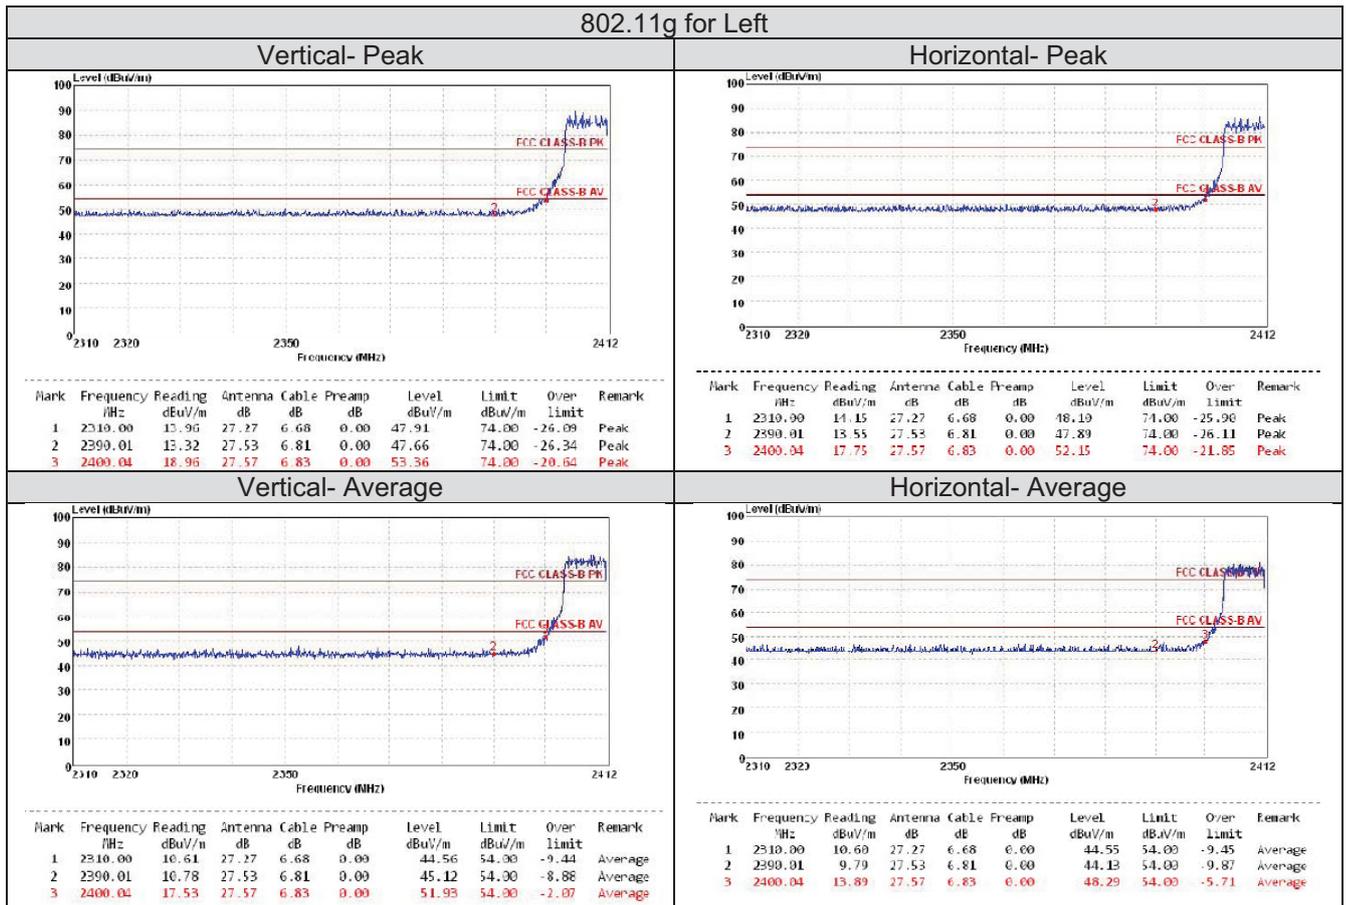


802.11g for Right

Vertical- Peak

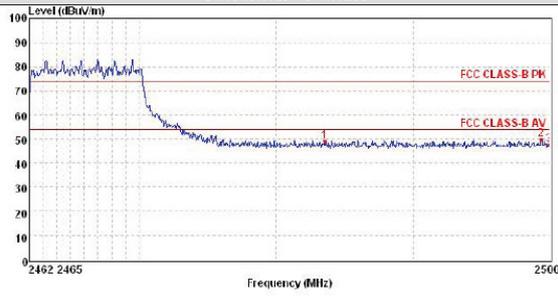


Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.51	14.12	27.85	6.96	0.00	48.93	74.00	-25.07	Peak
2	2499.39	14.96	27.90	6.98	0.00	49.84	74.00	-24.16	Peak
3	2500.00	12.55	27.90	6.98	0.00	47.43	74.00	-26.57	Peak

Horizontal- Peak

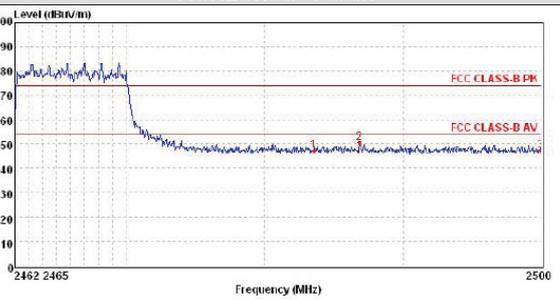


Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.51	12.58	27.85	6.96	0.00	47.39	74.00	-26.61	Peak
2	2486.82	15.68	27.85	6.96	0.00	50.49	74.00	-23.51	Peak
3	2500.00	12.40	27.90	6.98	0.00	47.28	74.00	-26.72	Peak

Vertical- Average

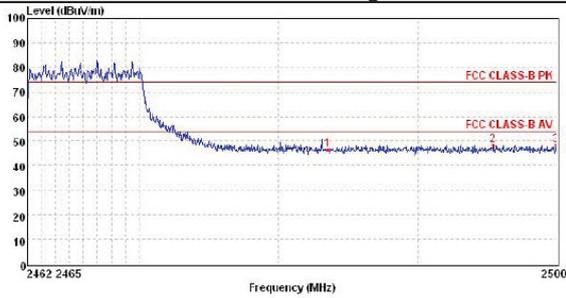

Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.51	11.80	27.85	6.96	0.00	46.61	54.00	-7.39	Average
2	2495.41	13.44	27.88	6.97	0.00	48.29	54.00	-5.71	Average
3	2500.00	13.34	27.90	6.98	0.00	48.22	54.00	-5.78	Average


Horizontal- Average

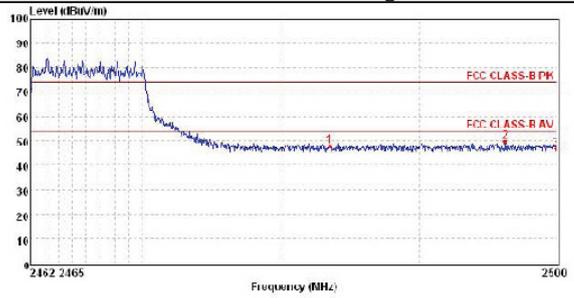

Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.51	13.18	27.85	6.96	0.00	47.99	54.00	-6.01	Average
2	2496.25	15.00	27.68	6.97	0.00	49.65	54.00	-4.35	Average
3	2500.00	12.11	27.90	6.98	0.00	46.99	54.00	-7.01	Average


802.11n20 for Left

Vertical- Peak

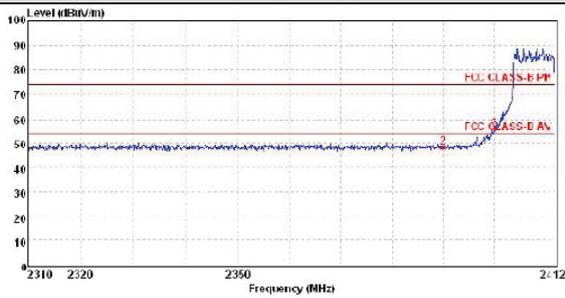


Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	13.52	27.27	6.68	0.00	47.47	74.00	-26.53	Peak
2	2390.01	13.95	27.53	6.81	0.00	48.29	74.00	-25.71	Peak
3	2400.04	21.51	27.57	6.83	0.00	55.91	74.00	-18.09	Peak

Horizontal- Peak

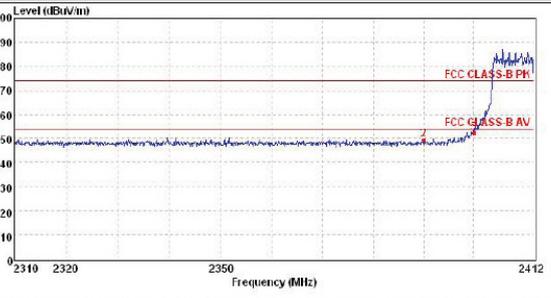


Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	14.24	27.27	6.68	0.00	48.19	74.00	-25.81	Peak
2	2390.01	15.11	27.53	6.81	0.00	49.45	74.00	-24.55	Peak
3	2400.04	17.93	27.57	6.83	0.00	52.33	74.00	-21.67	Peak

Vertical- Average

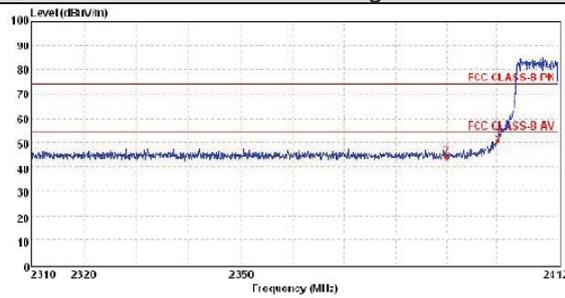

Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	10.55	27.27	6.68	0.00	44.50	54.00	-9.50	Average
2	2390.01	9.97	27.53	6.81	0.00	44.31	54.00	-9.69	Average
3	2400.04	16.71	27.57	6.83	0.00	51.11	54.00	-2.89	Average


Horizontal- Average

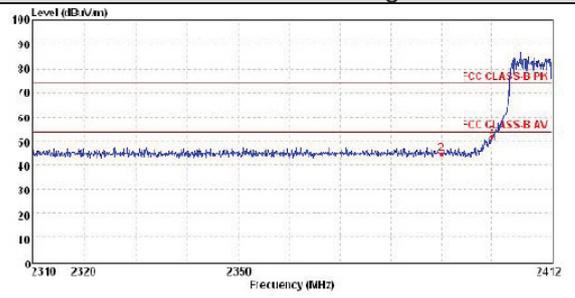

Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	10.95	27.27	6.68	0.00	44.90	54.00	-9.10	Average
2	2390.01	10.23	27.53	6.81	0.00	44.57	54.00	-9.43	Average
3	2400.04	17.09	27.57	6.83	0.00	51.49	54.00	-2.51	Average


802.11n20 for Right

Vertical- Peak

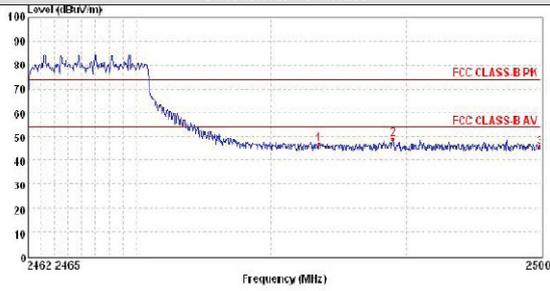


Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.51	12.07	27.85	6.96	0.00	46.88	74.00	-27.12	Peak
2	2489.03	14.41	27.85	6.96	0.00	49.22	74.00	-24.78	Peak
3	2500.00	10.77	27.90	6.98	0.00	45.65	74.00	-28.35	Peak

Horizontal- Peak

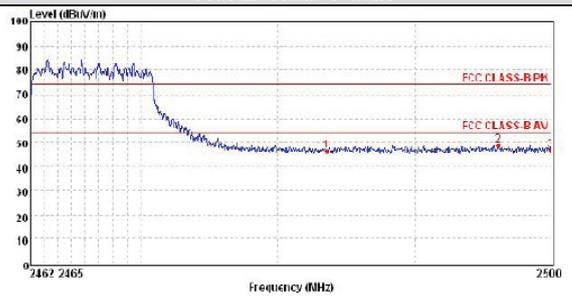


Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.51	11.63	27.85	6.96	0.00	46.44	74.00	-27.56	Peak
2	2496.06	13.92	27.83	6.97	0.00	48.77	74.00	-25.23	Peak
3	2500.00	11.91	27.93	6.98	0.00	46.79	74.00	-27.21	Peak

Vertical- Average

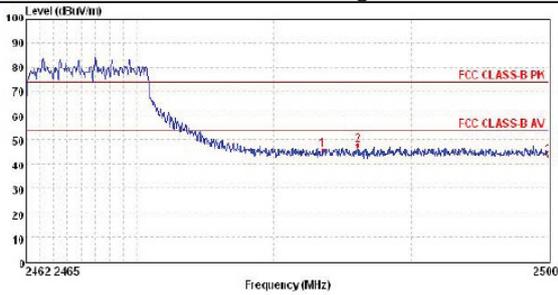

Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.51	11.33	27.85	6.96	0.00	46.14	54.00	-7.86	Average
2	2486.06	13.11	27.85	6.96	0.00	47.95	54.00	-6.05	Average
3	2500.00	8.50	27.90	6.98	0.00	43.38	54.00	-10.62	Average


Horizontal- Average

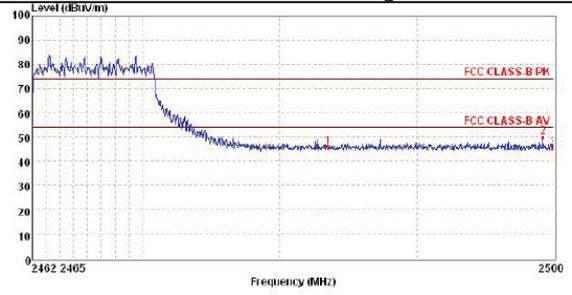

Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.51	10.85	27.85	6.96	0.00	45.66	54.00	-8.34	Average
2	2499.23	14.85	27.90	6.98	0.00	49.73	54.00	-4.27	Average
3	2500.00	10.53	27.90	6.98	0.00	45.41	54.00	-8.59	Average


802.11n40 for Left

Vertical- Peak

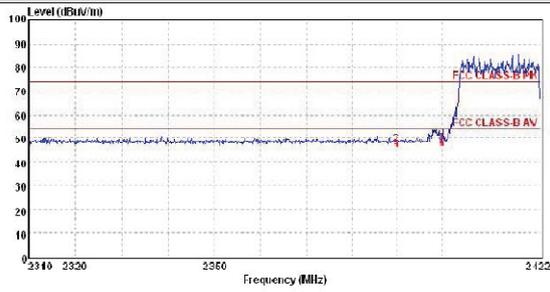


Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	14.01	27.27	6.68	0.00	47.96	74.00	-26.04	Peak
2	2389.99	13.42	27.53	6.81	0.00	47.76	74.00	-26.24	Peak
3	2399.97	13.65	27.57	6.83	0.00	48.05	74.00	-25.95	Peak

Horizontal- Peak

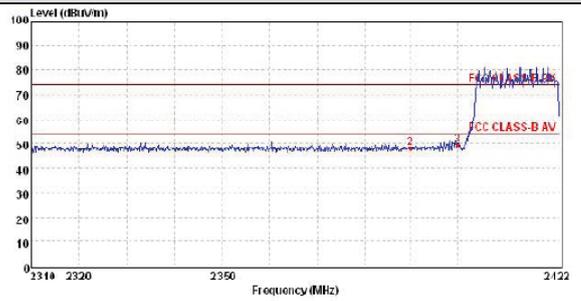


Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	13.42	27.27	6.68	0.00	47.37	74.00	-26.63	Peak
2	2389.99	13.00	27.53	6.81	0.00	46.22	74.00	-27.78	Peak
3	2399.97	14.93	27.57	6.83	0.00	49.33	74.00	-24.67	Peak

Vertical- Average

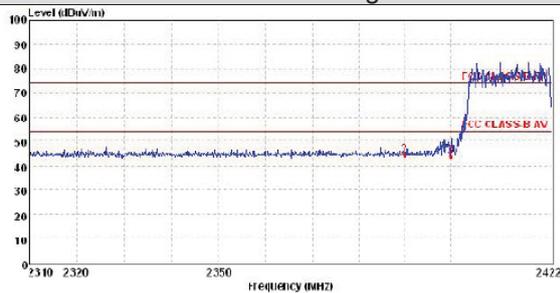

Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	12.76	27.27	6.68	0.00	45.73	54.00	-7.27	Average
2	2389.99	9.99	27.53	6.81	0.00	44.33	54.00	-9.67	Average
3	2399.97	9.35	27.57	6.83	0.00	43.75	54.00	-10.25	Average


Horizontal- Average

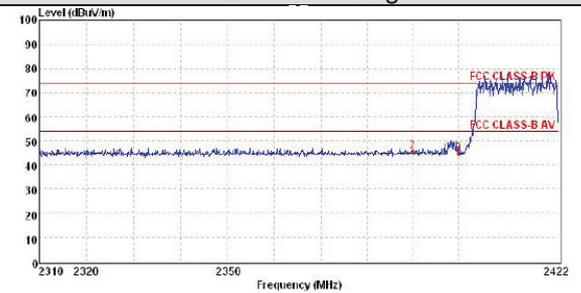

Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	10.99	27.27	6.68	0.00	44.94	54.00	-9.06	Average
2	2389.99	11.47	27.53	6.81	0.00	45.81	54.00	-8.19	Average
3	2399.97	10.22	27.57	6.83	0.00	44.62	54.00	-9.38	Average


802.11n40 for Right

Vertical- Peak

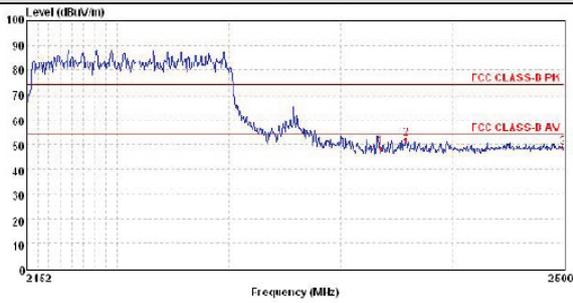


Mark	Frequency /MHz	Reading /dBuV/m	Antenna /dB	Cable /dB	Preamp /dB	Level /dBuV/m	Limit /dBuV/m	Over /limit	Remark
1	2483.48	13.73	27.85	6.96	0.00	48.55	74.00	-25.41	Peak
2	2485.79	17.15	27.85	6.96	0.00	51.96	74.00	-22.04	Peak
3	2500.00	13.67	27.90	6.98	0.00	48.55	74.00	-25.45	Peak

Horizontal- Peak

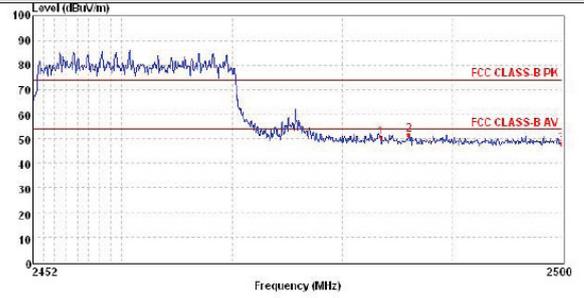


Mark	Frequency /MHz	Reading /dBuV/m	Antenna /dB	Cable /dB	Preamp /dB	Level /dBuV/m	Limit /dBuV/m	Over /limit	Remark
1	2483.48	15.66	27.85	6.96	0.00	50.47	74.00	-23.53	Peak
2	2486.03	16.88	27.85	6.96	0.00	51.69	74.00	-22.31	Peak
3	2500.00	13.17	27.90	6.98	0.00	48.05	74.00	-25.95	Peak

Vertical- Average

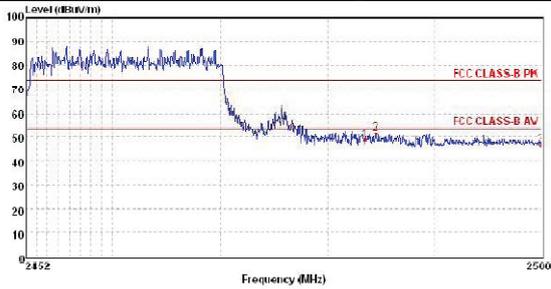

Mark	Frequency /MHz	Reading /dBuV/m	Antenna /dB	Cable /dB	Preamp /dB	Level /dBuV/m	Limit /dBuV/m	Over /limit	Remark
1	2483.48	14.12	27.85	6.96	0.00	48.93	54.00	-5.07	Average
2	2484.49	17.01	27.85	6.96	0.00	51.82	54.00	-2.18	Average
3	2500.00	11.69	27.90	6.98	0.00	46.57	54.00	-7.43	Average

Horizontal- Average

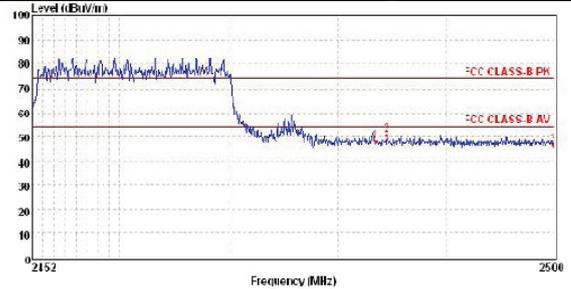

Mark	Frequency /MHz	Reading /dBuV/m	Antenna /dB	Cable /dB	Preamp /dB	Level /dBuV/m	Limit /dBuV/m	Over /limit	Remark
1	2483.48	12.97	27.85	6.96	0.00	47.78	54.00	6.22	Average
2	2484.54	15.82	27.85	6.96	0.00	50.63	54.00	3.37	Average
3	2500.00	11.74	27.90	6.98	0.00	46.62	54.00	-7.38	Average


4.7. Band edge and Spurious Emission (conducted)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION

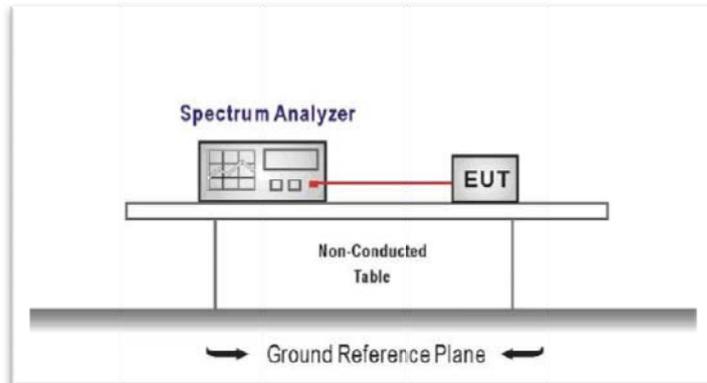

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. **Establish a reference level by using the following procedure**
Center frequency=DTS channel center frequency
The span = 1.5 times the DTS bandwidth.
RBW = 100 kHz, VBW ≥ 3 x RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum PSD level

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

3. **Emission level measurement**
Set the center frequency and span to encompass frequency range to be measured
RBW = 100 kHz, VBW ≥ 3 x RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum amplitude level.
4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
5. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emissions relative to the limit.

TEST RESULTS

Test plot as follows: