

FCC Test Report

Report No.: RFCCOG-WTW-P22060454

FCC ID: 2AH7L-UPSB

Test Model: PAS600L

Series Model: PAS600T, PAS600

Received Date: Jun. 15, 2022

Test Date: Sep. 08, 2022

Issued Date: Oct. 28, 2022

Applicant: Schneider Electric Industries SAS

Address: Electropole Site - 38EQ1, 31 rue Pierre Mendes France, Eybens - 38050
Grenoble cedex 9

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

FCC Registration /
Designation Number: 788550 / TW0003



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	8
3.2.1 Test Mode Applicability and Tested Channel Detail	9
3.3 Duty Cycle of Test Signal	9
3.4 Description of Support Units	10
3.4.1 Configuration of System under Test	10
3.5 General Description of Applied Standards and References	10
4 Test Types and Results	11
4.1 6 dB Bandwidth Measurement	11
4.1.1 Limits of 6 dB Bandwidth Measurement	11
4.1.2 Test Setup	11
4.1.3 Test Instruments	11
4.1.4 Test Procedure	11
4.1.5 Deviation from Test Standard	11
4.1.6 EUT Operating Conditions	11
4.1.7 Test Results	12
4.2 Occupied Bandwidth Measurement	13
4.2.1 Test Setup	13
4.2.2 Test Instruments	13
4.2.3 Test Procedure	13
4.2.4 Deviation from Test Standard	13
4.2.5 EUT Operating Conditions	13
4.2.6 Test Results	14
4.3 Conducted Output Power Measurement	15
4.3.1 Limits of Conducted Output Power Measurement	15
4.3.2 Test Setup	15
4.3.3 Test Instruments	15
4.3.4 Test Procedures	15
4.3.5 Deviation from Test Standard	15
4.3.6 EUT Operating Conditions	15
4.3.7 Test Results	15
4.4 Power Spectral Density Measurement	16
4.4.1 Limits of Power Spectral Density Measurement	16
4.4.2 Test Setup	16
4.4.3 Test Instruments	16
4.4.4 Test Procedure	16
4.4.5 Deviation from Test Standard	16
4.4.6 EUT Operating Condition	16
4.4.7 Test Results	17
4.5 Conducted Out of Band Emission Measurement	18
4.5.1 Limits of Conducted Out of Band Emission Measurement	18
4.5.2 Test Setup	18
4.5.3 Test Instruments	18
4.5.4 Test Procedure	18
4.5.5 Deviation from Test Standard	18
4.5.6 EUT Operating Condition	18
4.5.7 Test Results	19

Appendix – Information of the Testing Laboratories 20

Release Control Record

Issue No.	Description	Date Issued
RFCCOG-WTW-P22060454	Original Release	Oct. 28, 2022

1 Certificate of Conformity

Product: EcoStruxure Panel Server Universal

Brand: Schneider Electric

Test Model: PAS600L

Series Model: PAS600T, PAS600

Sample Status: Identical Prototype

Applicant: Schneider Electric Industries SAS

Test Date: Sep. 08, 2022

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10-2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :

Gina Liu

Date: Oct. 28, 2022

Gina Liu / Specialist

Approved by :

Jeremy Lin

Date: Oct. 28, 2022

Jeremy Lin / Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	N/A	Refer to Note
15.205 & 209	Radiated Emissions	N/A	Refer to Note
15.247(d)	Band Edge Measurement	N/A	Refer to Note
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Reference only
15.247(b)	Conducted Power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is RP-SMA male not a standard connector.

Note:

1. This report is a partial report, only antenna port conducted measurement tests were verified and recorded in this report. Other testing data please refer to report no.: RFBHBQ-WTW-P21030022.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	EcoStruxure Panel Server Universal
Brand	Schneider Electric
Test Model	PAS600L
Series Model	PAS600T, PAS600
Status of EUT	Identical Prototype
Power Supply Rating	24Vdc for PAS600L 110-240Vac, 50-60Hz and 240Vdc for PAS600T 110-277Vac, 50-60Hz and 277Vdc for PAS600
Modulation Type	GFSK
Transfer Rate	1 Mbps
Operating Frequency	2402 ~ 2480 MHz
Number of Channel	40
Output Power	0.07762 mW
Antenna Type	Refer to Note as below
Antenna Connector	Refer to Note as below
Accessory Device	External antenna (Brand: Schneider Electric; Model: PASA-ANT1)
Data Cable Supplied	N/A

Note:

1. This report is prepared for FCC class II permissive change. The difference compared with the original report (BV CPS report no.: RFBHBQ-WTW-P21030022) is reducing power setting and changing internal antenna gain. The output power is lowered via firmware/software settings only (and cannot be changed by end-user / any other third parties). Therefore, only antenna port conducted measurement tests were verified and recorded in this report.
2. All models are listed as below. Model: PAS600L is the representative for final test.

Brand	Model	Difference
Schneider Electric	PAS600L	Power Supply Rating: 24Vdc
	PAS600T	(1) Power Supply Rating: 110-240Vac/dc with +/-10% tolerance (2) Without digital input
	PAS600	(1) Power Supply Rating: 110 -277Vac/dc with +/-10% tolerance (2) Without digital input

3. The antenna information is listed as below.

Type	Ant. Type	Connector	Brand	Model	Gain (dBi)
External	Dipole	RP-SMA	Schneider Electric	PASA-ANT1	2.54
Internal	PCB	-	Schneider Electric	U31_1	2.14

4. Detail antenna specification please refer to antenna datasheet or an antenna gain measurement report.
5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or User's Manual.

3.2 Description of Test Modes

40 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To	Description
	APCM	
-	√	Internal Antenna

Where **APCM**: Antenna Port Conducted Measurement

Note: “-” means no effect.

Note: The internal and external antenna had been pre-tested for reduced power conducted power. The worst case scenario is the internal antenna.

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.


EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	0, 19, 39	GFSK	1

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested by
APCM	25 deg. C, 65 % RH	24 Vdc	Wayne Lin

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is 100 %, duty factor is not required.

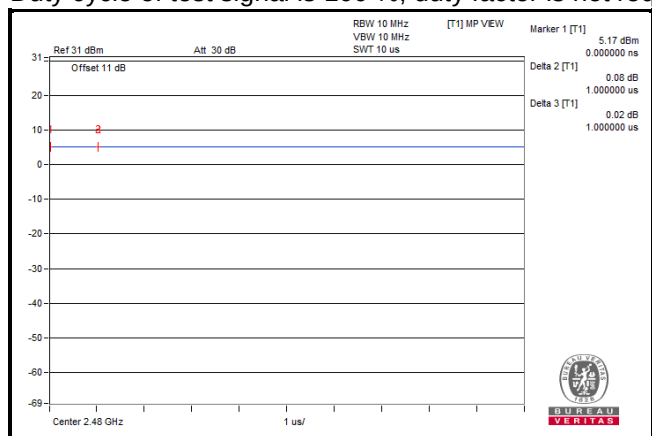

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Load	N/A	N/A	N/A	N/A	--
B.	DC Power Supply	Topward	33010D	807748	N/A	--

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	LAN Cable	1	1.5	N	0	--
2.	LAN Cable	1	1.5	N	0	--

3.4.1 Configuration of System under Test

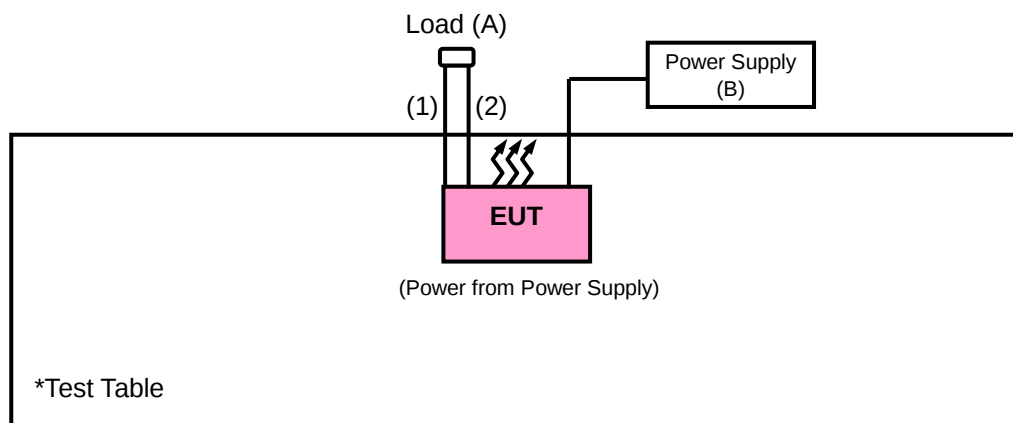

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

ANSI C63.10-2020

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 15.247 Meas Guidance v05r02

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 6 dB Bandwidth Measurement

4.1.1 Limits of 6 dB Bandwidth Measurement

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

4.1.2 Test Setup



4.1.3 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration	Due Date Of Calibration
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Apr. 20, 2022	Apr. 19, 2023
Peak Power Analyzer KEYSIGHT	8990B	MY51000485	Jan. 18, 2022	Jan. 17, 2023
Wideband Power Sensor KEYSIGHT	N1923A	MY58020002	Jan. 17, 2022	Jan. 16, 2023

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Oven room.

4.1.4 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.1.5 Deviation from Test Standard


No deviation.

4.1.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.1.7 Test Results

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	0.71	0.5	Pass
19	2440	0.72	0.5	Pass
39	2480	0.72	0.5	Pass

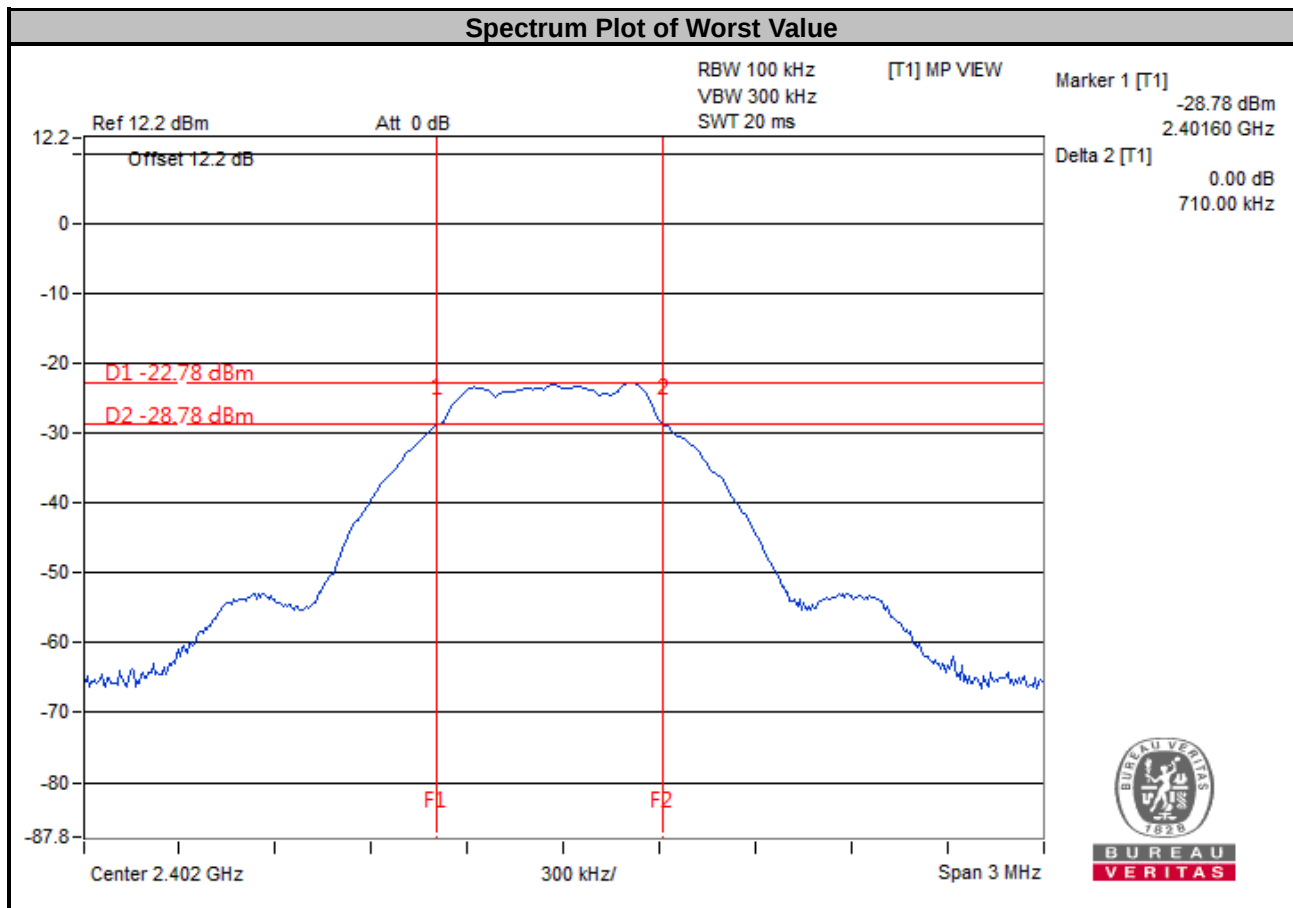

4.2 Occupied Bandwidth Measurement

4.2.1 Test Setup



4.2.2 Test Instruments

Refer to section 4.1.3 to get information of above instrument.

4.2.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1 % to 5 % of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.2.4 Deviation from Test Standard

No deviation.


4.2.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.2.6 Test Results

Mode A

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Pass / Fail
0	2402	1.03	Pass
19	2440	1.03	Pass
39	2480	1.03	Pass

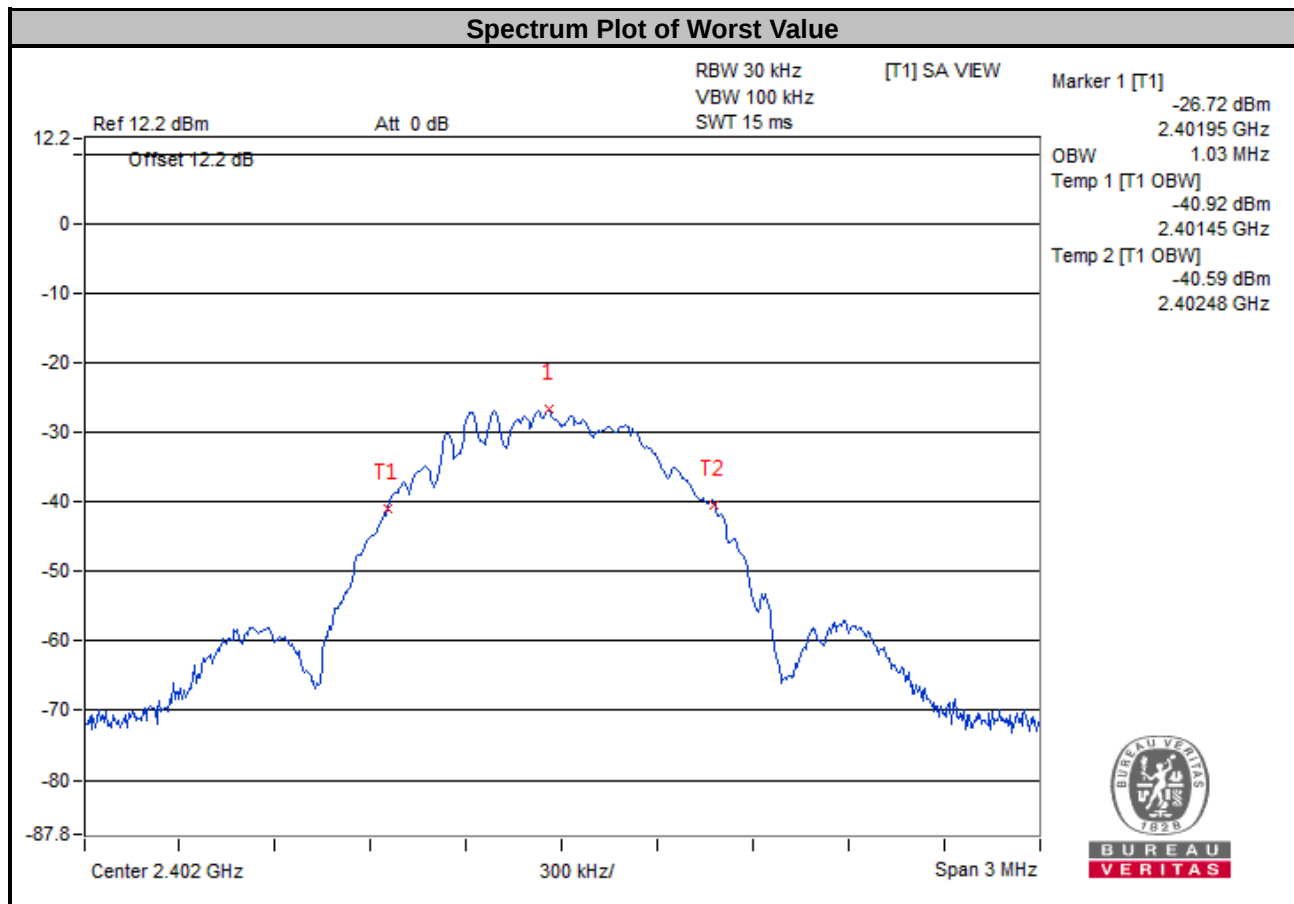


4.3 Conducted Output Power Measurement

4.3.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

4.3.2 Test Setup

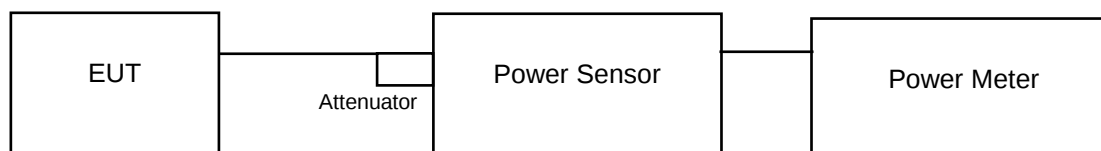

4.3.3 Test Instruments

Refer to section 4.1.3 to get information of above instrument.

4.3.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Results

Channel	Freq. (MHz)	Peak Power		Average Power		Power Limit (mW)	Pass / Fail
		(mW)	(dBm)	(mW)	(dBm)		
0	2402	0.07762	-11.10	0.002844	-25.46	1000	Pass
19	2440	0.07464	-11.27	0.002773	-25.57	1000	Pass
39	2480	0.07178	-11.44	0.002661	-25.75	1000	Pass

4.4 Power Spectral Density Measurement

4.4.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.3 to get information of above instrument.

4.4.4 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

4.4.5 Deviation from Test Standard


No deviation.

4.4.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.4.7 Test Results

Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	2402	-38.66	8	Pass
19	2440	-38.75	8	Pass
39	2480	-38.96	8	Pass

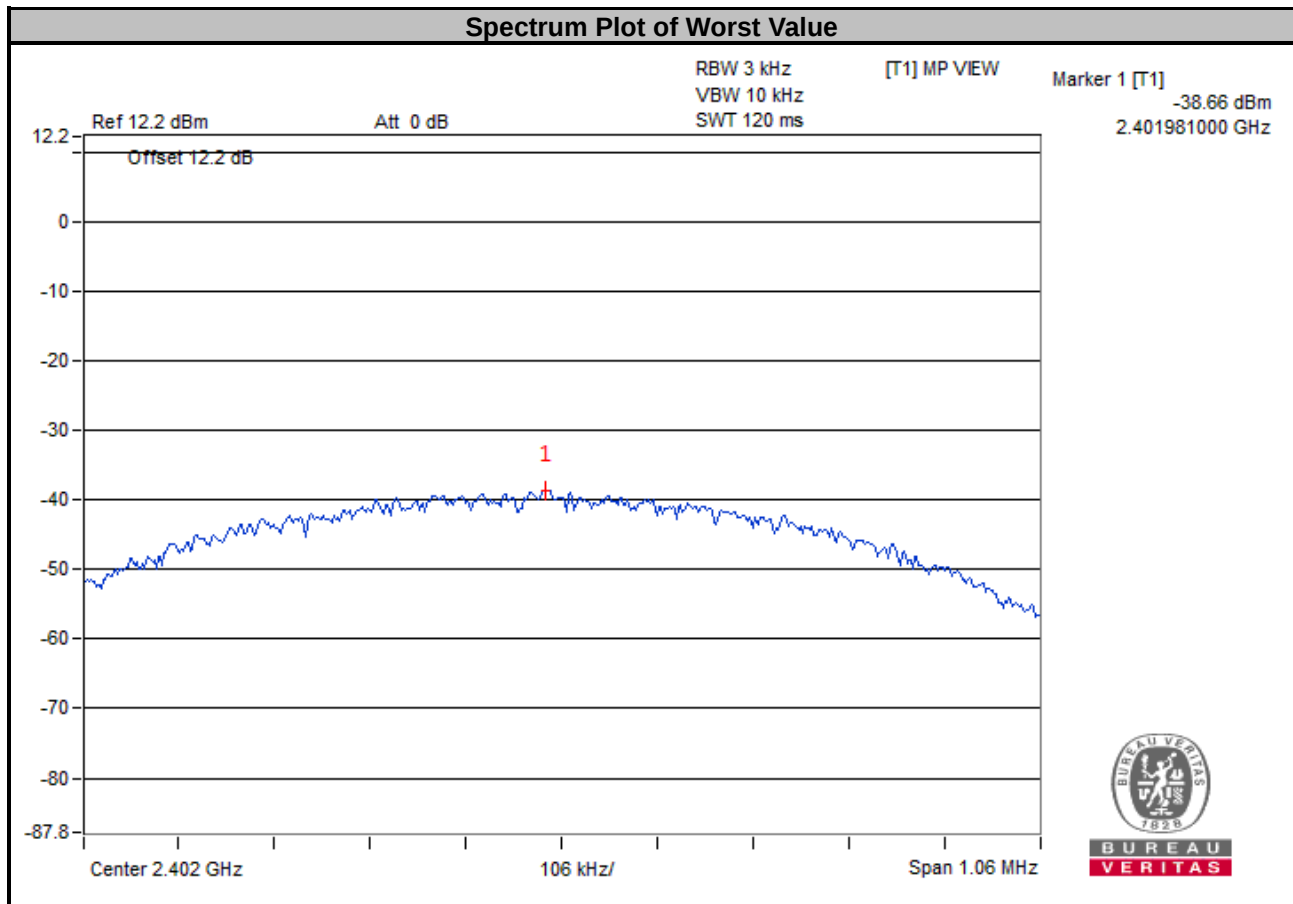


4.5 Conducted Out of Band Emission Measurement

4.5.1 Limits of Conducted Out of Band Emission Measurement

Below -20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.3 to get information of above instrument.

4.5.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.5.5 Deviation from Test Standard


No deviation.

4.5.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.5.7 Test Results

The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20 dB offset below D1. It shows compliance with the requirement.

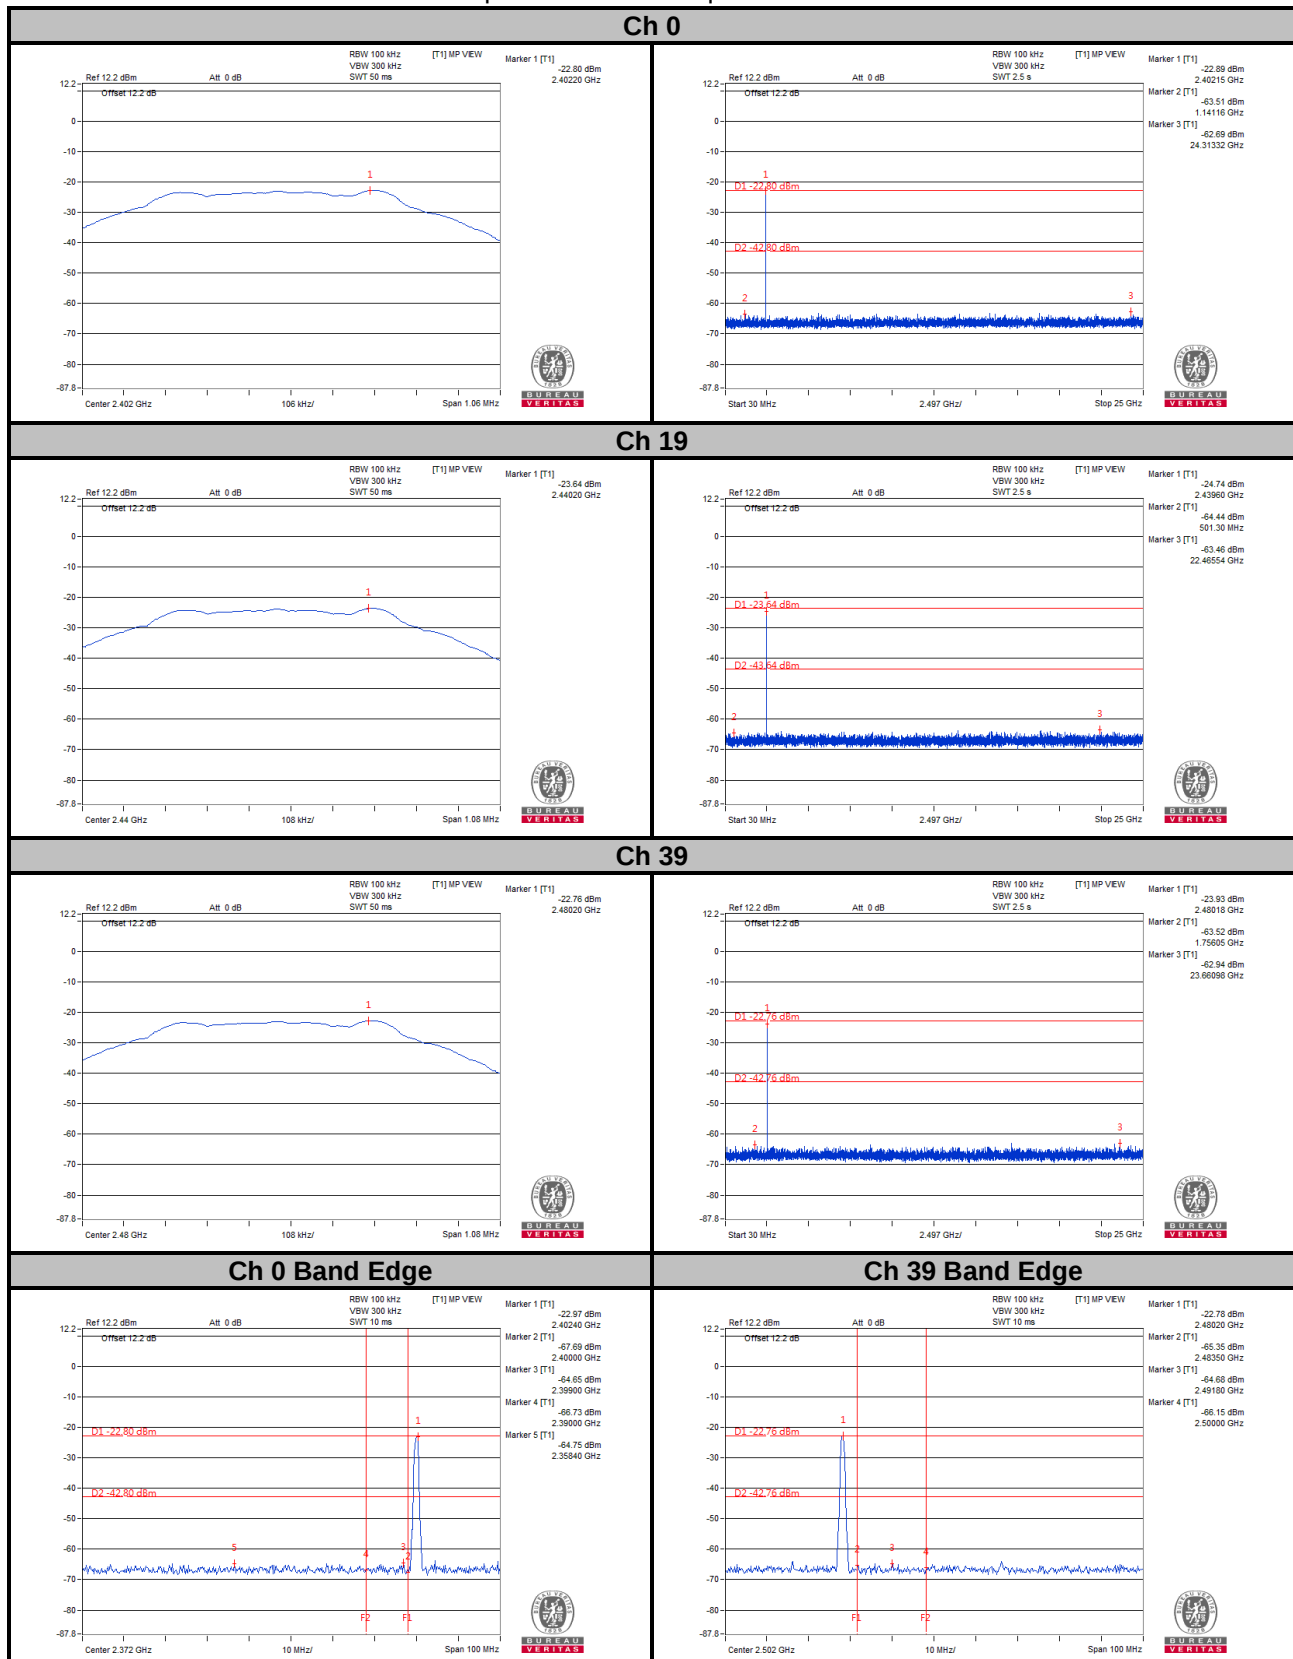

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---