

## FCC Test Report

**Report No.:** RFCCOG-WTW-P21120247B-2

**FCC ID:** 2AH7L-UPSC

**Test Model:** PAS400

**Received Date:** Jun. 01, 2023

**Test Date:** Aug. 11, 2023

**Issued Date:** Nov. 24, 2023

**Applicant:** Schneider Electric Industries SAS

**Address:** Electropole Site - 38EQ1, 31 rue Pierre Mendes France, Eybens - 38050  
Grenoble cedex 9

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location (1):** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, Taiwan

**Test Location (2):** No. 70, Wenming Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)

**FCC Registration /** 788550 / TW0003

**Designation Number(1):**

**FCC Registration /**

**Designation Number(2):** 281270 / TW0032



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

<b>Release Control Record</b> .....	<b>3</b>
<b>1 Certificate of Conformity</b> .....	<b>4</b>
<b>2 Summary of Test Results</b> .....	<b>5</b>
2.1 Modification Record .....	5
<b>3 General Information</b> .....	<b>6</b>
3.1 General Description of EUT .....	6
3.2 Description of Test Modes .....	7
3.2.1 Test Mode Applicability and Tested Channel Detail.....	8
3.3 Duty Cycle of Test Signal .....	8
3.4 Description of Support Units .....	9
3.4.1 Configuration of System under Test .....	9
3.5 General Description of Applied Standards and References .....	9
<b>4 Test Types and Results</b> .....	<b>10</b>
4.1 6dB Bandwidth Measurement.....	10
4.1.1 Limits of 6dB Bandwidth Measurement.....	10
4.1.2 Test Setup.....	10
4.1.3 Test Instruments .....	10
4.1.4 Test Procedure .....	10
4.1.5 Deviation from Test Standard .....	10
4.1.6 EUT Operating Conditions.....	10
4.1.7 Test Result.....	11
4.2 Conducted Output Power Measurement.....	12
4.2.1 Limits of Conducted Output Power Measurement .....	12
4.2.2 Test Setup.....	12
4.2.3 Test Instruments .....	12
4.2.4 Test Procedures.....	12
4.2.5 Deviation from Test Standard .....	12
4.2.6 EUT Operating Conditions.....	12
4.2.7 Test Results .....	12
4.3 Power Spectral Density Measurement.....	13
4.3.1 Limits of Power Spectral Density Measurement .....	13
4.3.2 Test Setup.....	13
4.3.3 Test Instruments .....	13
4.3.4 Test Procedure .....	13
4.3.5 Deviation from Test Standard .....	13
4.3.6 EUT Operating Condition .....	13
4.3.7 Test Results .....	14
4.4 Conducted Out of Band Emission Measurement.....	15
4.4.1 Limits of Conducted Out of Band Emission Measurement .....	15
4.4.2 Test Setup.....	15
4.4.3 Test Instruments .....	15
4.4.4 Test Procedure .....	15
4.4.5 Deviation from Test Standard .....	15
4.4.6 EUT Operating Condition .....	15
4.4.7 Test Results .....	15
<b>5 Pictures of Test Arrangements</b> .....	<b>17</b>
<b>Appendix – Information of the Testing Laboratories</b> .....	<b>18</b>

### Release Control Record

Issue No.	Description	Date Issued
RFCCOG-WTW-P21120247B-2	Original release	Nov. 24, 2023

## 1 Certificate of Conformity

**Product:** EcoStruxure™ Panel Server Entry

**Brand:** Schneider Electric

**Test Model:** PAS400


**Sample Status:** Engineering sample

**Applicant:** Schneider Electric Industries SAS

**Test Date:** Aug. 11, 2023

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10-2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :**  , **Date:** Nov. 24, 2023  
Polly Chien / Specialist

**Approved by :**  , **Date:** Nov. 24, 2023  
Jeremy Lin / Project Engineer

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	N/A	Refer to Note 1
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	N/A	Refer to Note 1
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	Pass	Meet the requirement of limit.
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note:

1. Only antenna port conducted measurement tests were verified and recorded in this report. Other testing data please refer to report no.: RFBGGV-WTW-P21120247-2.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	EcoStruxure™ Panel Server Entry
Brand	Schneider Electric
Test Model	PAS400
Sample Status	Engineering sample
Power Supply rating	110-277Vac/dc with +/-10% tolerance
Modulation Type	GFSK
Transfer Rate	1Mbps
Operating Frequency	2402 ~ 2480MHz
Number of Channel	40
Channel Spacing	2MHz
Output Power	0.2028mW
Antenna Type	PCB antenna with 3.22 dBi gain (Brand: Schneider Electric, model: ANT1_1)
Antenna Connector	NA
Accessory Device	NA
Cable Supplied	NA

Note:

1. This report is issued as a supplementary report of BV CPS report no.: RFBGGV-WTW-P21120247-2. The differences compared with the original report are reducing power setting and changing internal antenna from 3.5 dBi to 3.22 dBi gain. The output power is lowered via firmware/software settings only (and cannot be changed by end-user / any other third parties). Therefore, only antenna port conducted measurement tests were verified and recorded in this report.
2. Detail antenna specification please refer to antenna datasheet or an antenna gain measurement report.

### 3.2 Description of Test Modes

40 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to	Description
	APCM	
-	√	EUT + AC power

Where      APCM: Antenna Port Conducted Measurement

#### Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.


EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	0, 19, 39	GFSK	1

#### Test Condition:

Applicable to	Environmental Conditions	Input Power (System)	Tested by
APCM	25 deg. C, 60% RH	120Vac, 60Hz	Henry Hsu

### 3.3 Duty Cycle of Test Signal

**BT-LE 1M:** Duty cycle =  $0.387 \text{ ms} / 0.627 \text{ ms} \times 100\% = 61.7\%$ , duty factor =  $10 * \log (1/\text{Duty cycle}) = 2.10 \text{ dB}$

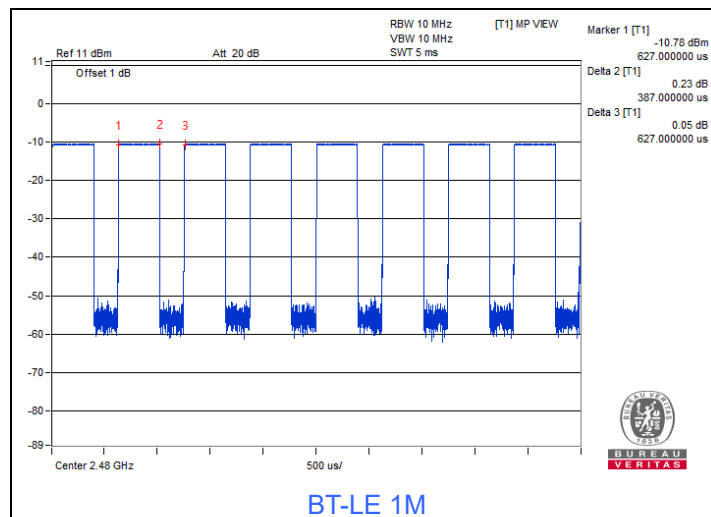




### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	Lenovo	80Q7	PF0KUGU6	NA	Provided by Lab
B.	DC power supply	JIN YIH Technology	SP3051	SP30512113402	NA	Provided by Lab

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB Cable	1	1	Y	0	Provided by Lab
2.	DC Cable	1	1.5	N	0	Provided by Lab

#### 3.4.1 Configuration of System under Test

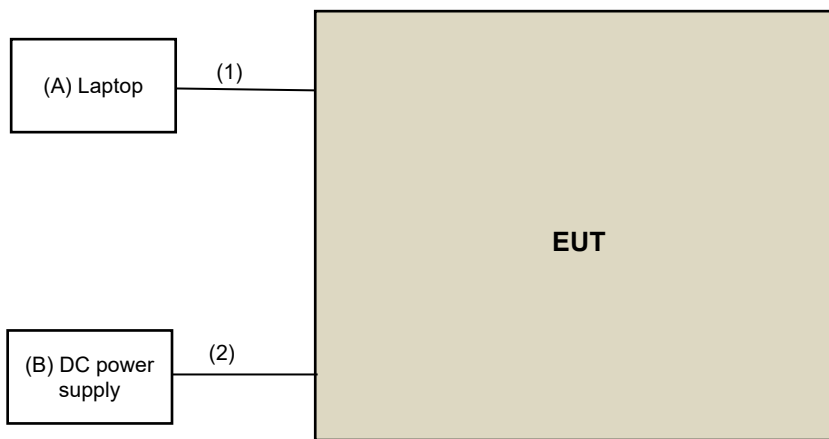

-----  
Under Table

-----  
Remote Site

### 3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

**Test standard:**

**FCC Part 15, Subpart C (15.247)**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

**References Test Guidance:**

**KDB 558074 D01 15.247 Meas Guidance v05r02**

All test items have been performed as a reference to the above KDB test guidance.


## 4 Test Types and Results

### 4.1 6dB Bandwidth Measurement

#### 4.1.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.1.2 Test Setup



#### 4.1.3 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100979	Mar. 25, 2023	Mar. 24, 2024
Peak Power Analyzer KEYSIGHT	8990B	MY51000485	Jan. 19, 2023	Jan. 18, 2024
Wideband Power Sensor KEYSIGHT	N1923A	MY58020002	Jan. 18, 2023	Jan. 17, 2024

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The test was performed in Oven room.

#### 4.1.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz.
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 4.1.5 Deviation from Test Standard


No deviation.

#### 4.1.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.1.7 Test Result

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	0.72	0.5	Pass
19	2440	0.72	0.5	Pass
39	2480	0.72	0.5	Pass

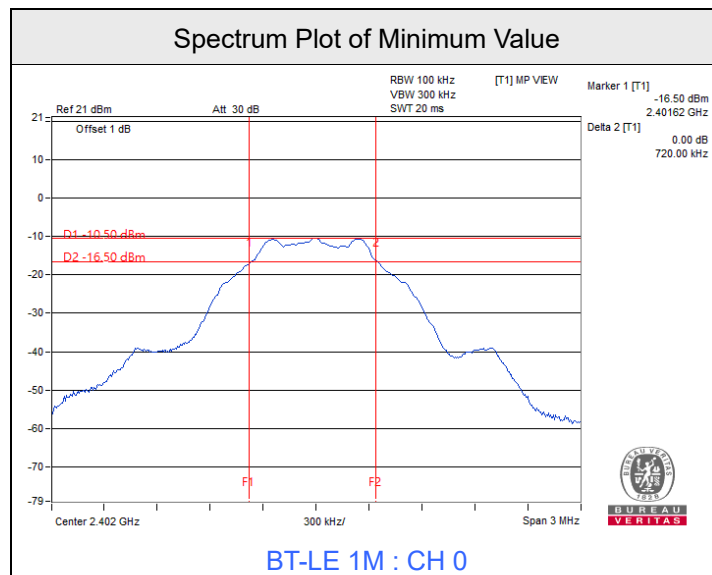

## 4.2 Conducted Output Power Measurement

### 4.2.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

### 4.2.2 Test Setup



### 4.2.3 Test Instruments

Refer to section 4.1.3 to get information of above instrument.

### 4.2.4 Test Procedures

For Peak Power

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

For Average Power

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

### 4.2.5 Deviation from Test Standard

No deviation.

### 4.2.6 EUT Operating Conditions

Same as item 4.1.6.

### 4.2.7 Test Results

#### Peak Power

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
0	2402	0.1774	-7.51	30.00	Pass
19	2440	0.2028	-6.93	30.00	Pass
39	2480	0.173	-7.62	30.00	Pass

Note: The antenna gain is 3.22 dBi < 6 dBi, so the output power limit shall not be reduced.

#### Average Power


Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
0	2402	0.1062	-9.74
19	2440	0.1169	-9.32
39	2480	0.08954	-10.48

### 4.3 Power Spectral Density Measurement

#### 4.3.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm per 3kHz.

#### 4.3.2 Test Setup



#### 4.3.3 Test Instruments

Refer to section 4.1.3 to get information of above instrument.

#### 4.3.4 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d. Set the VBW  $\geq 3 \times \text{RBW}$ .
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

#### 4.3.5 Deviation from Test Standard

No deviation.


#### 4.3.6 EUT Operating Condition

Same as item 4.1.6

### 4.3.7 Test Results

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
0	2402	-24.34	8.00	Pass
19	2440	-24.19	8.00	Pass
39	2480	-25.10	8.00	Pass

Note: The antenna gain is 3.22 dBi < 6 dBi, so the power density limit shall not be reduced.

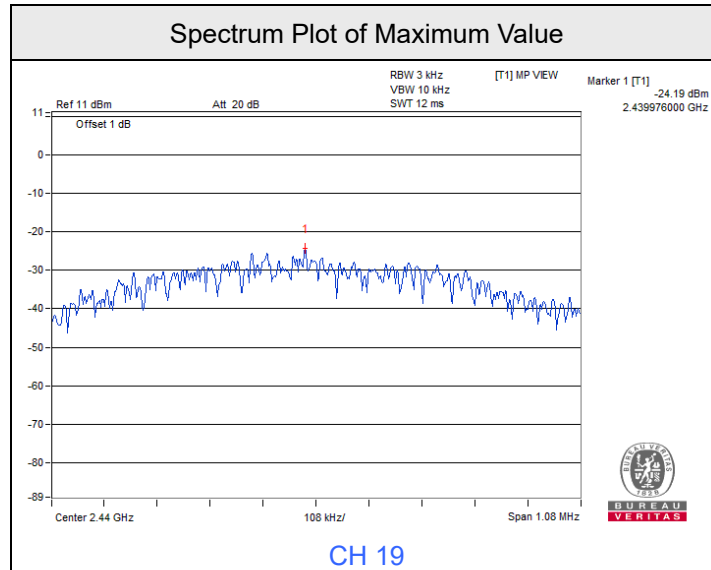


#### 4.4 Conducted Out of Band Emission Measurement

##### 4.4.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

##### 4.4.2 Test Setup



##### 4.4.3 Test Instruments

Refer to section 4.1.3 to get information of above instrument.

##### 4.4.4 Test Procedure

###### MEASUREMENT PROCEDURE REF

- Set the RBW = 100 kHz.
- Set the VBW  $\geq$  300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

###### MEASUREMENT PROCEDURE OOB

- Set RBW = 100 kHz.
- Set VBW  $\geq$  300 kHz.
- Detector = peak.
- Sweep = auto couple.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

##### 4.4.5 Deviation from Test Standard

No deviation.









##### 4.4.6 EUT Operating Condition

Same as item 4.1.6

##### 4.4.7 Test Results

The conducted emission test is performed on each TX port of operating mode without summing or adding 10log (N) since the limit is relative emission limit.

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

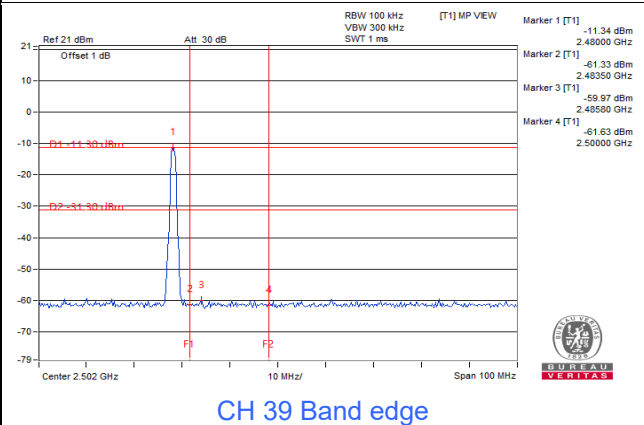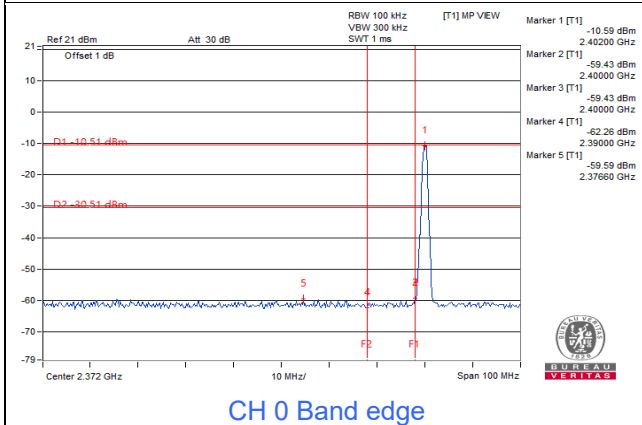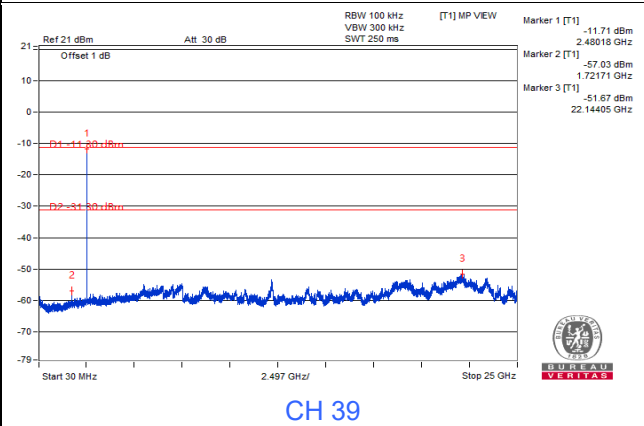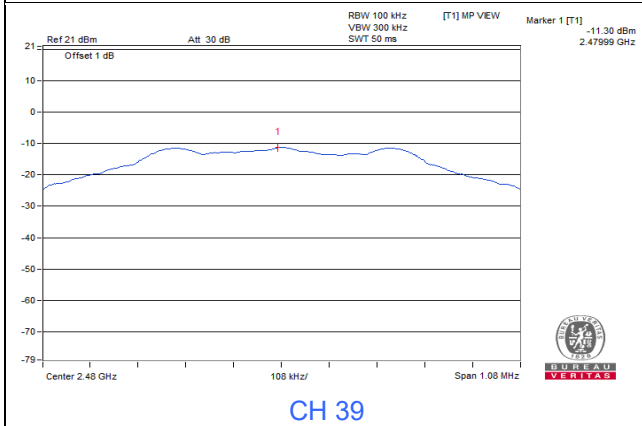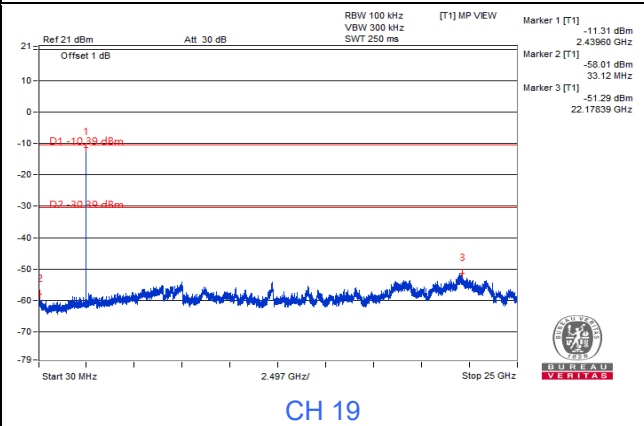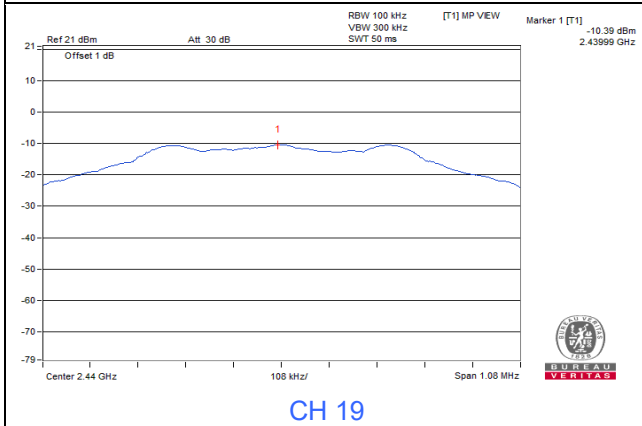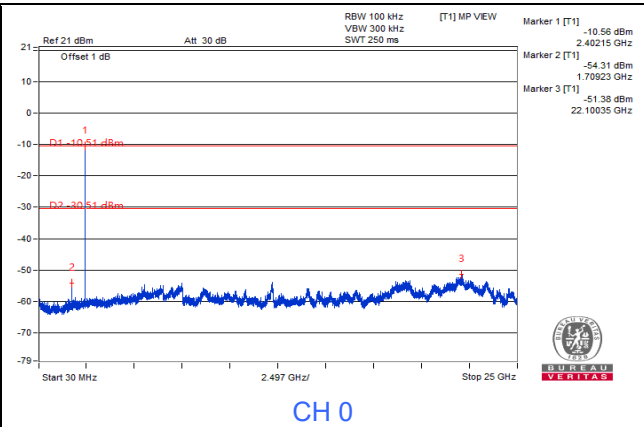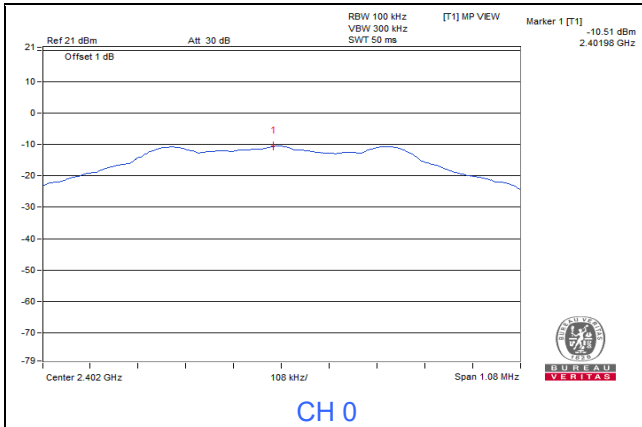



## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

### Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

### Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@bureauveritas.com](mailto:service.adt@bureauveritas.com)

**Web Site:** <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---