

FCC Test Report

Report No.: RFCCOG-WTW-P21120247B-3

FCC ID: 2AH7L-UPSC

Test Model: PAS400

Received Date: Jun. 01, 2023

Test Date: Aug. 11, 2023

Issued Date: Nov. 24, 2023

Applicant: Schneider Electric Industries SAS

Address: Electropole Site - 38EQ1, 31 rue Pierre Mendès France, Eybens - 38050 Grenoble cedex 9

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Modification Record	5
3 General Information	6
3.1 General Description of EUT	6
3.2 Description of Test Modes	6
3.2.1 Test Mode Applicability and Tested Channel Detail.....	7
3.3 Duty Cycle of Test Signal	7
3.4 Description of Support Units	8
3.4.1 Configuration of System under Test	8
3.5 General Description of Applied Standards and References	8
4 Test Types and Results	9
4.1 6dB Bandwidth Measurement.....	9
4.1.1 Limits of 6dB Bandwidth Measurement.....	9
4.1.2 Test Setup.....	9
4.1.3 Test Instruments	9
4.1.4 Test Procedure	9
4.1.5 Deviation from Test Standard	9
4.1.6 EUT Operating Conditions.....	9
4.1.7 Test Result.....	10
4.2 Conducted Output Power Measurement.....	11
4.2.1 Limits of Conducted Output Power Measurement	11
4.2.2 Test Setup.....	11
4.2.3 Test Instruments	11
4.2.4 Test Procedures.....	11
4.2.5 Deviation from Test Standard	11
4.2.6 EUT Operating Conditions.....	11
4.2.7 Test Results	11
4.3 Power Spectral Density Measurement.....	12
4.3.1 Limits of Power Spectral Density Measurement	12
4.3.2 Test Setup.....	12
4.3.3 Test Instruments	12
4.3.4 Test Procedure	12
4.3.5 Deviation from Test Standard	12
4.3.6 EUT Operating Condition	12
4.3.7 Test Results	13
4.4 Conducted Out of Band Emission Measurement.....	14
4.4.1 Limits of Conducted Out of Band Emission Measurement	14
4.4.2 Test Setup.....	14
4.4.3 Test Instruments	14
4.4.4 Test Procedure	14
4.4.5 Deviation from Test Standard	14
4.4.6 EUT Operating Condition	14
4.4.7 Test Results	14
5 Pictures of Test Arrangements	16
Appendix – Information of the Testing Laboratories	17

Release Control Record

Issue No.	Description	Date Issued
RFCCOG-WTW-P21120247B-3	Original release	Nov. 24, 2023

1 Certificate of Conformity

Product: EcoStruxure™ Panel Server Entry

Brand: Schneider Electric

Test Model: PAS400

Sample Status: Engineering sample

Applicant: Schneider Electric Industries SAS

Test Date: Aug. 11, 2023

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10-2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Polly Chien , **Date:** Nov. 24, 2023
Polly Chien / Specialist

Approved by : Jeremy Lin , **Date:** Nov. 24, 2023
Jeremy Lin / Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	N/A	Refer to Note 1
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	N/A	Refer to Note 1
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	Pass	Meet the requirement of limit.
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note:

1. Only antenna port conducted measurement tests were verified and recorded in this report. Other testing data please refer to report no.: RFBGGV-WTW-P21120247-3.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	EcoStruxure™ Panel Server Entry
Brand	Schneider Electric
Test Model	PAS400
Sample Status	Engineering sample
Power Supply rating	110-277Vac/dc with +/-10% tolerance
Modulation Type	O-QPSK
Modulation Technology	DSSS
Transfer Rate	250 kbps
Operating Frequency	2405 ~ 2480MHz
Number of Channel	16
Output Power	1.069mW
Antenna Type	Refer to note
Antenna Connector	Refer to note
Accessory Device	NA
Cable Supplied	NA

Note:

1. This report is issued as a supplementary report of BV CPS report no.: RFBGGV-WTW-P21120247-3. The differences compared with the original report are reducing power setting and changing internal antenna 1 from 3.5 dBi to 3.03 dBi gain and antenna 2 from 3.5 dBi to 2.6 dBi gain. The output power is lowered via firmware/software settings only (and cannot be changed by end-user / any other third parties). Therefore, only antenna port conducted measurement tests were verified and recorded in this report.
2. The following antennas were provided to the EUT.

Item	Brand	Model	Antenna Type	Connector	Gain(dBi)
Antenna 1	Schneider Electric	U7_1	PCB	NA	3.03
Antenna 2	Schneider Electric	U8_1	PCB	NA	2.6

*There is diversity on Antenna 1 and Antenna 2. Antenna 1 was chosen to be the final test.

*Detail antenna specification please refer to antenna datasheet or an antenna gain measurement report.

3.2 Description of Test Modes

16 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
11	2405	15	2425	19	2445	23	2465
12	2410	16	2430	20	2450	24	2470
13	2415	17	2435	21	2455	25	2475
14	2420	18	2440	22	2460	26	2480

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to	Description
	APCM	
-	√	EUT + AC power

Where APCM: Antenna Port Conducted Measurement

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.


EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
-	11 to 26	11, 18, 26	O-QPSK

Test Condition:

Applicable to	Environmental Conditions	Input Power (System)	Tested by
APCM	25 deg. C, 60% RH	120Vac, 60Hz	Henry Hsu

3.3 Duty Cycle of Test Signal

Zigbee: Duty cycle = 100 ms / 100 ms x 100% = 100.0%

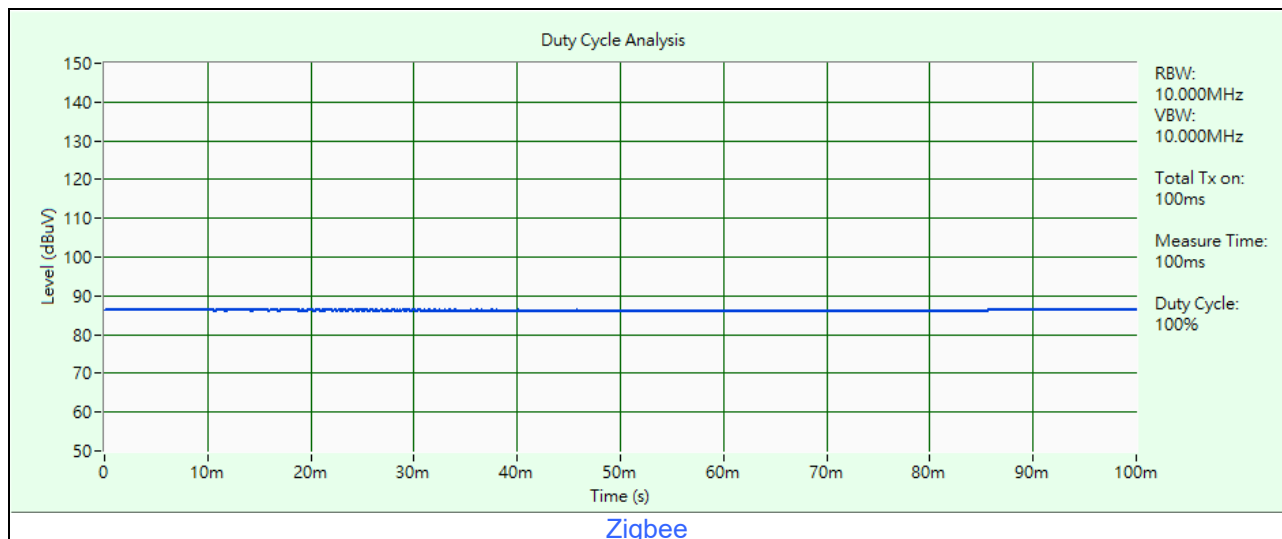


3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	Lenovo	80Q7	PF0KUGU6	NA	Provided by Lab
B.	DC power supply	JIN YIH Technology	SP3051	SP30512113402	NA	Provided by Lab

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB Cable	1	1	Y	0	Provided by Lab
2.	DC Cable	1	1.5	N	0	Provided by Lab

3.4.1 Configuration of System under Test

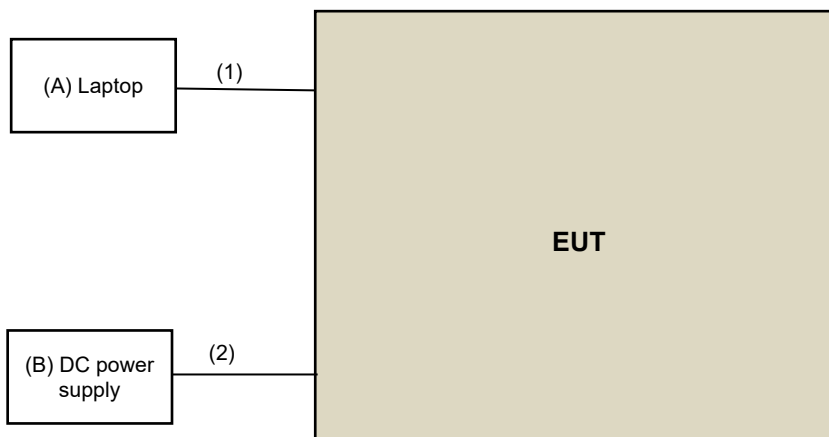

Under Table

Remote Site

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 15.247 Meas Guidance v05r02

All test items have been performed as a reference to the above KDB test guidance.


4 Test Types and Results

4.1 6dB Bandwidth Measurement

4.1.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.1.2 Test Setup

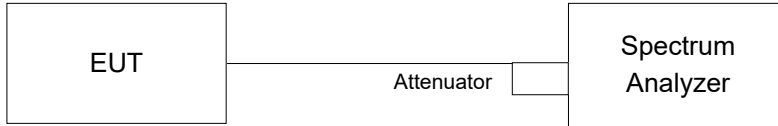

4.1.3 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100979	Mar. 25, 2023	Mar. 24, 2024
Peak Power Analyzer KEYSIGHT	8990B	MY51000485	Jan. 19, 2023	Jan. 18, 2024
Wideband Power Sensor KEYSIGHT	N1923A	MY58020002	Jan. 18, 2023	Jan. 17, 2024

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Oven room.

4.1.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.1.5 Deviation from Test Standard


No deviation.

4.1.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.1.7 Test Result

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
11	2405	1.70	0.5	Pass
18	2440	1.69	0.5	Pass
26	2480	1.69	0.5	Pass

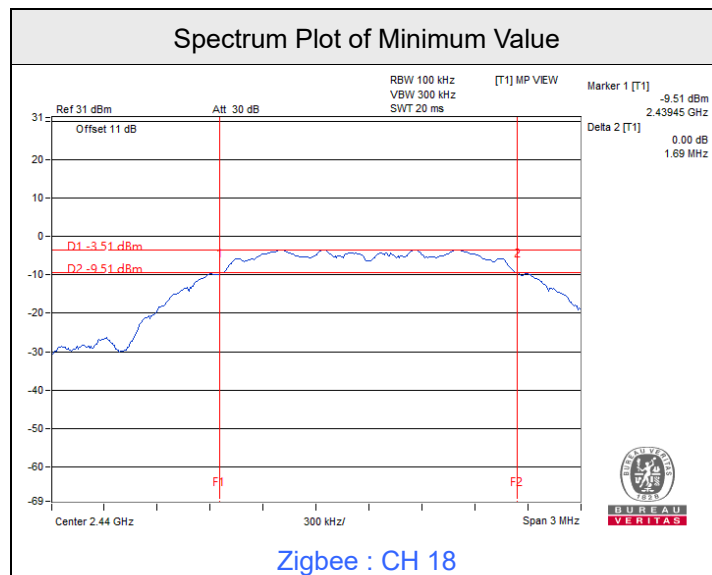

4.2 Conducted Output Power Measurement

4.2.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.2.2 Test Setup



4.2.3 Test Instruments

Refer to section 4.1.3 to get information of above instrument.

4.2.4 Test Procedures

For Peak Power

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

For Average Power

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.2.5 Deviation from Test Standard

No deviation.

4.2.6 EUT Operating Conditions

Same as item 4.1.6.

4.2.7 Test Results

For Peak Power

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
11	2405	1.069	0.29	30.00	Pass
18	2440	1.059	0.25	30.00	Pass
26	2480	0.9772	-0.10	30.00	Pass

For Average Power


Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
11	2405	0.9863	-0.06
18	2440	0.9817	-0.08
26	2480	0.9204	-0.36

4.3 Power Spectral Density Measurement

4.3.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm per 3kHz.

4.3.2 Test Setup

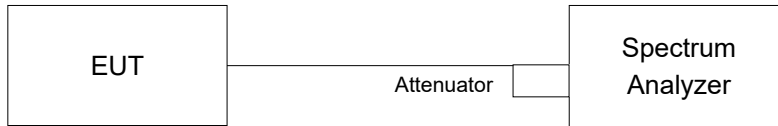

4.3.3 Test Instruments

Refer to section 4.1.3 to get information of above instrument.

4.3.4 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d. Set the VBW $\geq 3 \times \text{RBW}$.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

4.3.5 Deviation from Test Standard

No deviation.


4.3.6 EUT Operating Condition

Same as item 4.1.6

4.3.7 Test Results

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
11	2405	-15.90	8.00	Pass
18	2440	-14.78	8.00	Pass
26	2480	-15.07	8.00	Pass

Note: The antenna gain is 3.03 dBi < 6 dBi, so the power density limit shall not be reduced.

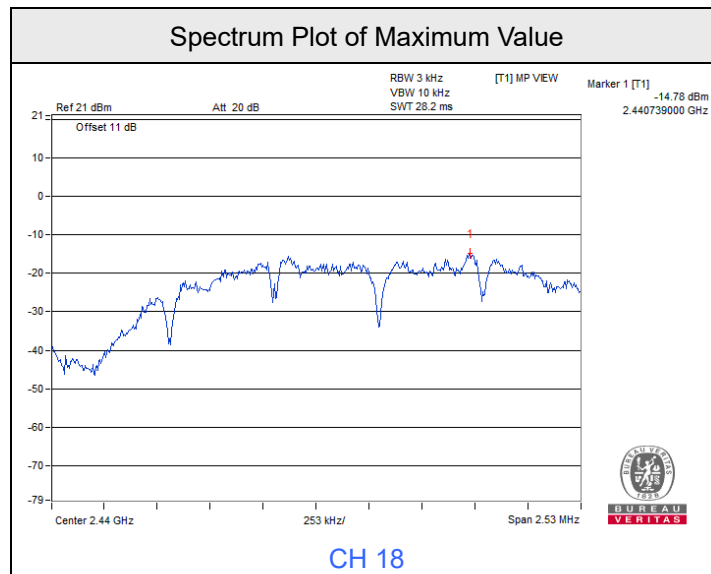


4.4 Conducted Out of Band Emission Measurement

4.4.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.4.2 Test Setup

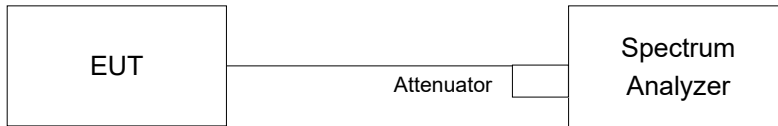

4.4.3 Test Instruments

Refer to section 4.1.3 to get information of above instrument.

4.4.4 Test Procedure

MEASUREMENT PROCEDURE REF

- Set the RBW = 100 kHz.
- Set the VBW \geq 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

- Set RBW = 100 kHz.
- Set VBW \geq 300 kHz.
- Detector = peak.
- Sweep = auto couple.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

4.4.5 Deviation from Test Standard

No deviation.


4.4.6 EUT Operating Condition

Same as item 4.1.6


4.4.7 Test Results

The conducted emission test is performed on each TX port of operating mode without summing or adding 10log (N) since the limit is relative emission limit.


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

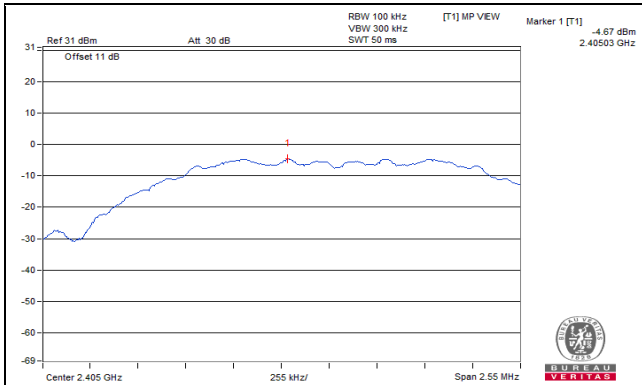


CH 11

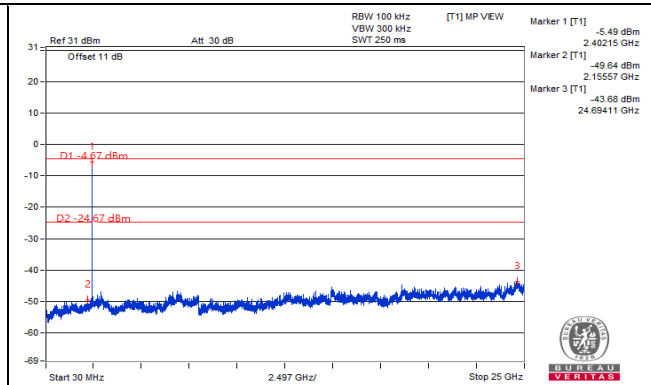


CH 11

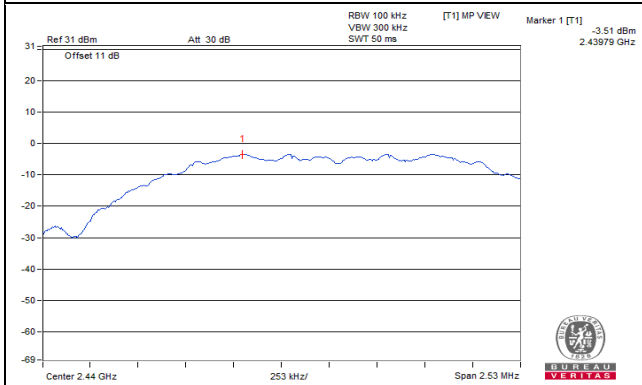


CH 18

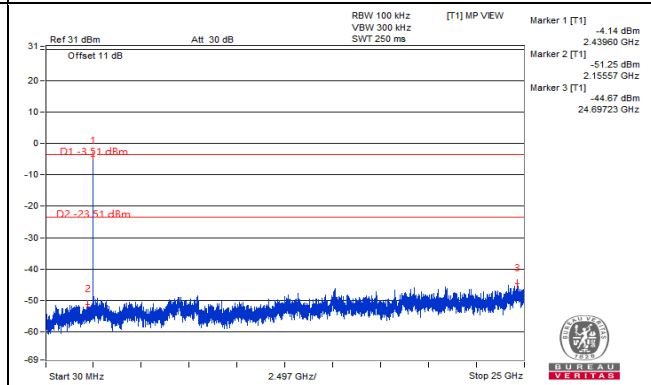


CH 18

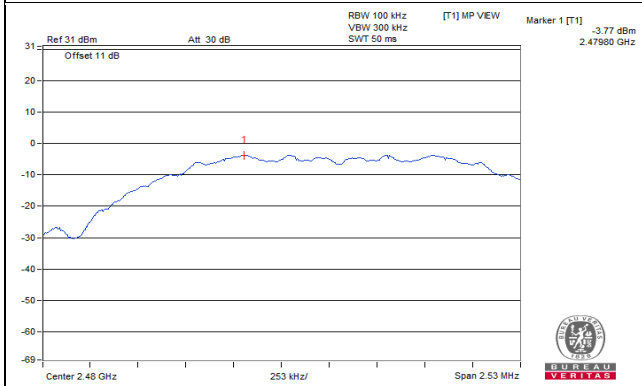


CH 26

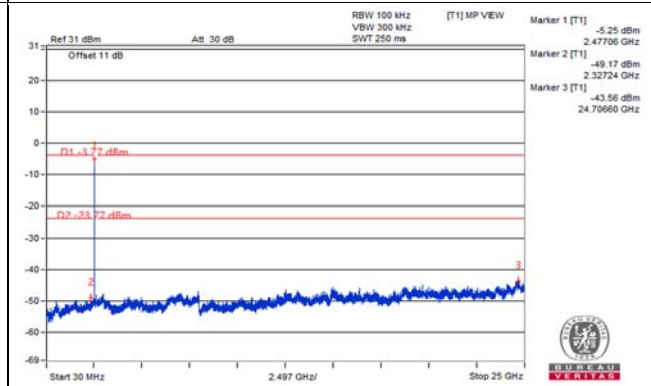

CH 26

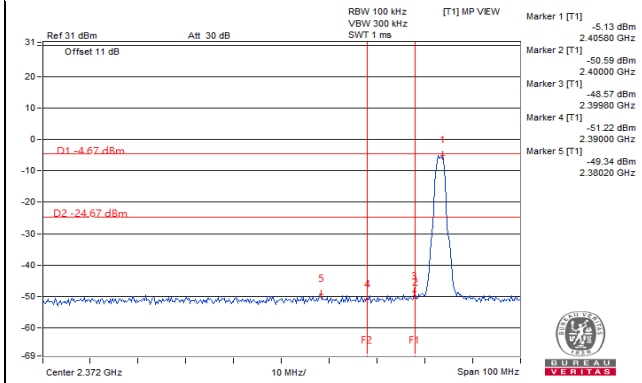

CH 11 Band edge

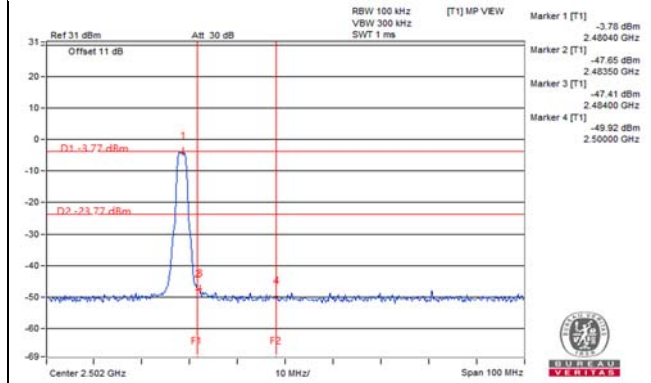

CH 26 Band edge

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---