




FCCID: 2AH7LPLT2P

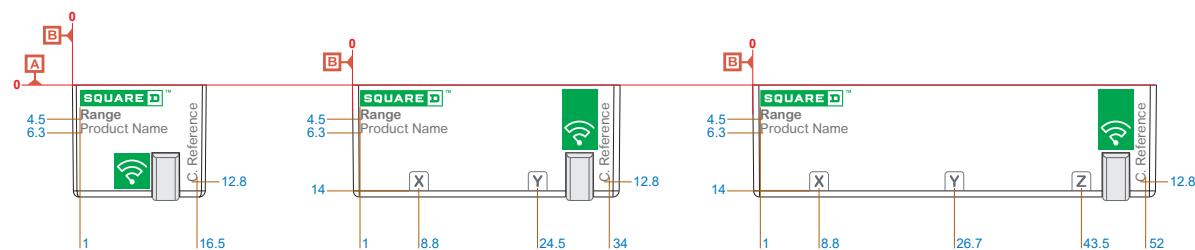

Range name : Arial Rounded bold 5pt
Product name (variable data) : Arial Rounded regular 5pt
Ref. Com. (variable data) : Arial Rounded regular 4.5pt

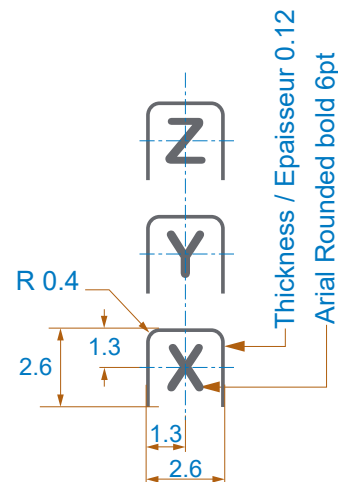


Detail Scale / Echelle 4:1

Marking Front Faces / Marquage Faces Avant


Variable Data Marking

Product assembly	Front Face		Lateral face		
	Ref. Com.	Prod. Name	Area 1	Area 4	FCC ID ID
1P+N EDB MFR77071	PLTE601P	Tag E E60	Un = ~ 277V	I _{max} = 60A	FCC ID / 2AH7LPLT1P IC : 21522-PLT1P
2P EDB MFR77072	PLTE602P	Tag E E60	Un = ~ 480V	I _{max} = 60A	FCC ID / 2AH7LPLT2P IC : 21522-PLT2P
3P EDB MFR77073	PLTE603P	Tag E E60	Un = 3~ 480V	I _{max} = 60A	FCC ID / 2AH7LPLT3P IC : 21522-PLT3P
1P+N LOW AMP MFR77074	PLTQO301P	Tag E QO30	Un = ~ 120V	I _{max} = 30A	FCC ID / 2AH7LPLT1P IC : 21522-PLT1P
2P LOW AMP MFR77076	PLTQO302P	Tag E QO30	Un = ~ 208–240V	I _{max} = 30A	FCC ID / 2AH7LPLT2P IC : 21522-PLT2P
3P LOW AMP MFR77079	PLTQO303P	Tag E QO30	Un = 3~ 208–240V	I _{max} = 30A	FCC ID / 2AH7LPLT3P IC : 21522-PLT3P
1P+N MID AMP MFR77075	PLTQO601P	Tag E QO60	Un = ~ 120V	I _{max} = 60A	FCC ID / 2AH7LPLT1P IC : 21522-PLT1P
2P MID AMP MFR77077	PLTQO602P	Tag E QO60	Un = ~ 208–240V	I _{max} = 60A	FCC ID / 2AH7LPLT2P IC : 21522-PLT2P
3P MID AMP MFR77080	PLTQO603P	Tag E QO60	Un = 3~ 208–240V	I _{max} = 60A	FCC ID / 2AH7LPLT3P IC : 21522-PLT3P

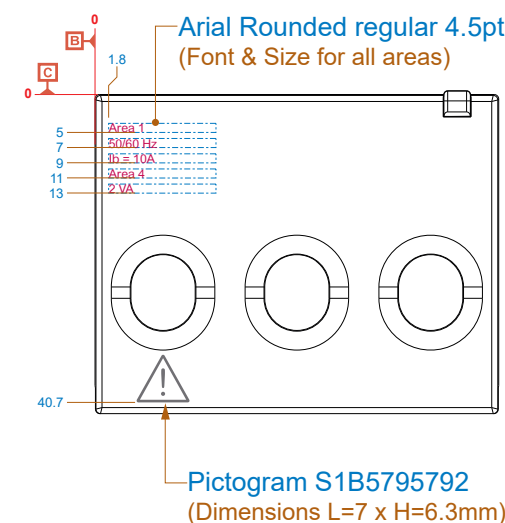

Pictogram Symbol AC
S1A4985804

Marking example

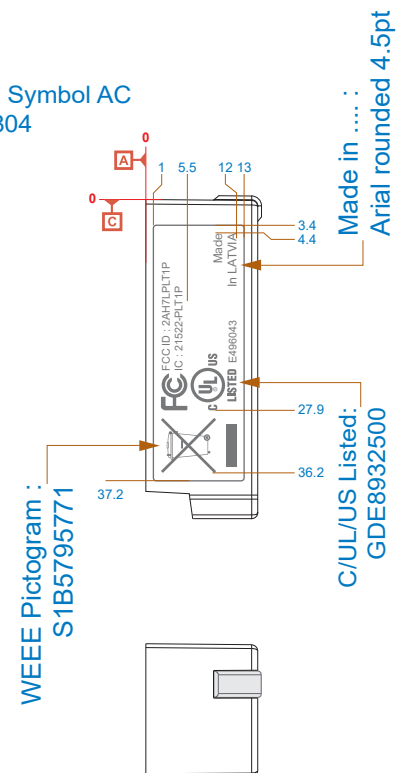

Marking Other Faces / Marquage Autres Faces

Couleurs des marquages :

- Pantone Cool Grey 7 C à 9 C

Essai d'indélébilité du marquage :

- Essai conforme à la norme IEC 61010-1 article 5.3
- Recommandations d'exécution :
Selon la surface considérée, le frottement est effectué avec le plat d'un ou plusieurs doigts avec une force ne dépassant pas 5N.
Le frottement se fait à raison d'environ un cycle par seconde (un cycle comprenant un aller et un retour sur toute la longueur)

Test d'adhérence au ruban adhésif :

- Mode opératoire :
Dégraisser la surface
Appliquer un ruban adhésif
L'appliquer avec un objet rond et dur
Arracher brusquement
- Interprétation :
Ce test ne doit provoquer ni décollement ni soulèvement du dépôt.

Markings colors :


- Pantone Cool Grey 7 C to 9 C

Test of indelibility of marking :

- Test compliant with standard IEC 61010-1 section 5.3
- Testing recommendations :
Depending on the considered surface, rubbing is performed with the flat of one or several fingers, under a load smaller than 5N.
Rubbing is made at one cycle per second (a cycle is a complete back and forth movement).

Adherence test with adhesive tape :

- Operating instruction :
Apply adhesive tape
Degrease surface
Applied with a round and hard object
Pull it out abruptly
- Interpretation :
This test must not reveal any detachment nor lift off of the paint.

	Scale : 1:1	Tolerancing standard : ± 0.2	Units of measure : Millimeter	
	POWERTAG NAM COVERS MARKING			
	<i>POWERTAG NAM COVERS MARKING</i>			
Number : GDE1902800		Revision : 04	Sheet : 1/1	
All information and data contained in this document are the exclusive property of Schneider Electric Industries SAS and may neither be used nor disclosed without its prior written consent.		State : Under Promotion for Pilot Run Printed on 2021/05/26		

