

FCC TEST REPORT
for
SHENZHEN HAINATIANYUAN ECOMMERCE CO.,LTD
7 inch 2G/3G phoneTablet PC
Model Number: MD706
Serial Number:MC706
FCC ID: 2AH96-MD706

Prepared for : SHENZHEN HAINATIANYUAN ECOMMERCE CO.,LTD

Address : 308, Jinyuanjia Industrial Park, Xialilang Ind Area,
Nanwan St., Longgang, Shenzhen, Guangdong, China

Prepared by : Keyway Testing Technology Co., Ltd.

Address : Building 1, Baishun Industrial Zone, Zhangmutou Town,
Dongguan, Guangdong, China

Tel: 86-769-8718 2258

Fax: 86-769-8718 1058

Report No. : 16KWE053746F

Date of Test : Apr. 27~May.08, 2016

Date of Report : May. 09, 2016

Keyway Testing Technology Co., Ltd.


Applicant:	SHENZHEN HAINATIANYUAN ECOMMERCE CO.,LTD		
Address:	308, Jinyuanjia Industrial Park, Xialilang Ind Area, Nanwan St., Longgang, Shenzhen, Guangdong, China		
Manufacturer:	SHENZHEN HAINATIANYUAN ECOMMERCE CO.,LTD		
Address:	308, Jinyuanjia Industrial Park, Xialilang Ind Area, Nanwan St., Longgang, Shenzhen, Guangdong, China		
E.U.T:	7 inch 2G/3G phoneTablet PC		
Model Number:	MD706		
Serial Model:	MC706		
Trade Name:	HAEHNE	Serial No.:	-----
Date of Receipt:	Apr. 26, 2016	Date of Test:	Apr. 27~May.08, 2016
Test Specification:	FCC Part 22H and 24E: 01 Oct. 2015 TIA/EIA 603D		
Test Result:	The equipment under test was found to be compliance with the requirements of the standards applied.		
Issue Date: May. 09, 2016			
May. 09, 2016	Tested by:	Reviewed by:	Approved by:
			
_____	_____	_____	_____
Keven Wu / Engineer	Mike Xu / Supervisor	Andy Gao / Supervisor	
Other Aspects:			
None.			
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Keyway Testing Technology Co., Ltd.			

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	5
1. GENERAL INFORMATION.....	5
1.1 PRODUCT DESCRIPTION	5
1.2 RELATED SUBMITTAL(S) / GRANT (S).....	6
1.3 TEST METHODOLOGY	6
1.4 TEST FACILITY	6
1.5 MEASUREMENT INSTRUMENTS.....	6
1.6 SPECIAL ACCESSORIES.....	6
1.7 EQUIPMENT MODIFICATIONS	6
2. SYSTEM TEST CONFIGURATION	7
2.1 EUT CONFIGURATION.....	7
2.2 EUT EXERCISE.....	7
2.3 GENERAL TECHNICAL REQUIREMENTS	7
2.4 CONFIGURATION OF EUT SYSTEM.....	8
3. SUMMARY OF TEST RESULTS	9
4. DESCRIPTION OF TEST MODES	9
5. OUTPUT POWER	10
5.1 Conducted Output Power.....	10
5.2 Radiated Output Power.....	15
6. SPURIOUS EMISSION	19
6.1 CONDUCTED SPURIOUS EMISSION	19
7. FREQUENCY STABILITY.....	27
7.1 MEASUREMENT METHOD	27
7.2 PROVISIONS APPLICABLE.....	27
7.3 MEASUREMENT RESULT	28
8. BANDWIDTH	33

8.1APPLICABLE STANDARD 33

8.2 Test Procedure..... 33

8.3 MEASUREMENT RESULT 33

9. BAND EDGE37

9.1 Applicable Standard 37

9.2 Test Procedure..... 37

9.3 MEASUREMENT RESULT 37

10. PEAK-TO-AVERAGE RATIO.....38

DESCRIPTION OF THE PAR MEASUREMENT 38

10.1 MEASURING INSTRUMENTS 38

10.2 TEST PROCEDURES 38

10.3 TEST SETUP 38

10.4 TEST RESULT OF PEAK-TO-AVERAGE RATIO 39

TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION.....40

TEST PLOTS FOR OCCUPIED BANDWIDTH (99%) 65

EMISSION BANDWIDTH (-26DBC) 65

APPENDIX III 79

TEST PLOTS FOR BAND EDGES 79

PHOTOGRAPHS OF TEST SETUP 88

11.PHOTOGRAPHS OF THE EUT 89

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	7 inch 2G/3G phoneTablet PC
Hardware version:	ALPS.KK1.MP7.V1
Software version:	M706-MB-4.2
Frequency Bands:	<input checked="" type="checkbox"/> GSM 850 <input checked="" type="checkbox"/> PCS 1900 (U.S. Bands) <input type="checkbox"/> GSM 900 <input type="checkbox"/> DCS 1800 (Non-U.S. Bands) U.S. Bands: <input checked="" type="checkbox"/> UMTS FDD Band II <input checked="" type="checkbox"/> UMTS FDD Band V Non-U.S. Bands: <input type="checkbox"/> UMTS FDD Band I <input type="checkbox"/> UMTS FDD Band VIII
Antenna:	FPCB Antenna
Antenna gain:	1.0 dBi
Power Supply:	DC 3.7V by battery
Battery parameter:	DC 3.7V,2800mAh
Adapter Input:	100-240V~,50/60 Hz
Adapter Output:	5.0V $\overline{\text{---}}$,1.8A
GPRS Class	Multi-Class12 Only 4 timeslots are used for GPRS
SIM CARD	The Phone Two SIM Card sockets
Extreme Vol. Limits:	DC3.5V to 4.2 V (Nominal DC3.7 V)
Extreme Temp. Tolerance	-10°C to +50°C
** Note: The High Voltage 4.2V and Low Voltage 3.5V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.	

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AH96-MD706** filing to comply with the FCC Part 22H&24E .

1.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of TIA/EIA 603D and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

Keyway Testing Technology Co., Ltd.

Building 1, Baishun Industrial Zone, Zhangmutou Town, Dongguan, Guangdong, China

FCC Registration No.: 370994

IC Registration No.: 9868A

CNAS Registration No.:L5783

1.5 MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	NEXT CAL. DATE
SPECTRUM ANALYZER	AGILENT	E4440A	US44300399	2016.7.06
TEST RECEIVER	R&S	ESCI	A0304218	2016.7.06
COMMUNICATION TESTER	AGILENT	8960	3104A03367	2016.7.06
COMMUNICATION TESTER	R&S	CMU200	A0304247	2016.7.06
TEST RECEIVER	R&S	FCKL1528	A0304230	2016.7.06
LISN	SCHWARZBECK	NSLK8127	A0304233	2016.7.06
CLIMATE CHAMBER	ALBATROSS	--	--	2016.7.06
Bilog Antenna	A.H. Systems Inc.	SAS-521-4	VULB9168-438	2016.7.06
Bilog Antenna	A.H. Systems Inc.	SAS-521-4	VULB9168-439	2016.7.06
Horn Antenna	EM	EM-AH-10180	A052604	2016.7.06
Horn Antenna	EM	EM-AH-10180	A052605	2016.7.06
Vector signal generator	Agilent	E8257D-521	MY45141029	2016.10.14

1.6 SPECIAL ACCESSORIES

The battery and the charger supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

1.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 GENERAL TECHNICAL REQUIREMENTS

Item Number	Item Description		FCC Rules
1	Output Power	Conducted output power	22.913(a) / 24.232 (b)
		Radiated output power	
2	Spurious Emission	Conducted spurious emission	2.1051 / 22.917 / 24.238
		Radiated spurious emission	
3	Frequency Stability		2.1055 /24.235
4	Occupied Bandwidth		2.1049 (h)(i)
5	Emission Bandwidth		22.917(b) / 24.238 (b)
6	Band Edge		22.917(b) / 24.238 (b)
7	Peak-to-Average Ratio		24.232(d)

2.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System




Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	7 inch 2G/3G phoneTablet PC	MD706	FCC ID: 2AH96-MD706	EUT

*Note: All the accessories have been used during the test.
the following “EUT” in setup diagram means EUT system.*

3. SUMMARY OF TEST RESULTS

Item Number	Item Description		FCC Rules	Result
1	Output Power	Conducted Output Power	22.913(a) / 24.232 (b)	Pass
		Radiated Output Power		
2	Spurious Emission	Conducted Spurious Emission	2.1051 / 22.917 / 24.238	Pass
		Radiated Spurious Emission		
3	Frequency Stability		2.1055 /24.235	Pass
4	Occupied Bandwidth		2.1049 (h)(i)	Pass
5	Emission Bandwidth		22.917(b) / 24.238 (b)	Pass
6	Band Edge		22.917(b) / 24.238 (b)	Pass
7	Peak-to-Average Ratio		24.232(d)	Pass

4. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GPRS850 and GPRS1900 frequency band.

Note: GSM/GPRS 850, GSM/GPRS 1900, HSDPA band II, HSUPA band II, HSDPA band V, HSUPA band V modes have been tested during the test. the worst condition (GSM850, GSM1900 RMC 12.2k) be recorded in the test report if no other modes test data.

5. OUTPUT POWER

5.1 Conducted Output Power

5.1.1 MEASUREMENT METHOD

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GSM/GPRS 850, GSM/GPRS 1900, HSDPA band II, HSUPA band II, HSDPA band V, HSUPA band V) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

5.1.2 MEASUREMENT RESULT

GSM850:

Mode	Frequency (MHz)	Maximum Burst-Average Output Power
GSM850	824.2	32.54
	836.6	32.33
	848.8	32.26
GPRS850 (1 Slot)	824.2	32.43
	836.6	32.26
	848.8	32.59
GPRS850 (2 Slot)	824.2	31.45
	836.6	31.32
	848.8	31.54
GPRS850 (3 Slot)	824.2	29.74
	836.6	29.66
	848.8	29.52
GPRS850 (4 Slot)	824.2	28.35
	836.6	28.84
	848.8	28.10
EGPRS850 (1 Slot)	824.2	32.35
	836.6	32.86
	848.8	32.45
EGPRS850 (2 Slot)	824.2	31.62
	836.6	31.65
	848.8	31.74
EGPRS850 (3 Slot)	824.2	29.64
	836.6	29.53
	848.8	29.57
EGPRS850 (4 Slot)	824.2	28.48
	836.6	28.29
	848.8	28.71

PCS1900:

Mode	Frequency (MHz)	Maximum Burst-Average Output Power
GSM1900	1850.2	29.15
	1880	28.48
	1909.8	29.64
GPRS1900 (1 Slot)	1850.2	28.52
	1880	28.31
	1909.8	28.54
GPRS1900 (2 Slot)	1850.2	27.37
	1880	27.55
	1909.8	27.24
GPRS1900 (3 Slot)	1850.2	27.64
	1880	27.73
	1909.8	27.84
GPRS1900 (4 Slot)	1850.2	26.82
	1880	26.79
	1909.8	26.48
EGPRS1900 (1 Slot)	1850.2	29.45
	1880	29.38
	1909.8	29.57
EGPRS1900 (2 Slot)	1850.2	28.64
	1880	28.51
	1909.8	28.30
EGPRS1900 (3 Slot)	1850.2	27.36
	1880	27.74
	1909.8	27.22
EGPRS1900 (4 Slot)	1850.2	26.69
	1880	26.27
	1909.8	26.68

UMTS BAND II

Mode	Frequency (MHz)	Maximum Burst-Average Output Power
WCDMA 1900 RMC	1852.4	21.54
	1880.0	21.63
	1907.6	21.22
WCDMA 1900 AMR	1852.4	21.48
	1880.0	21.19
	1907.6	21.56
HSDPA Subtest 1	1852.4	20.48
	1880	20.25
	1907.6	20.79
HSDPA Subtest 2	1852.4	20.65
	1880	20.36
	1907.6	20.44
HSDPA Subtest 3	1852.4	20.87
	1880	20.45
	1907.6	20.36
HSDPA Subtest 4	1852.4	19.56
	1880	19.42
	1907.6	19.76
HSUPA Subtest 1	1852.4	21.54
	1880.0	21.66
	1907.6	21.21
HSUPA Subtest 2	1852.4	20.05
	1880.0	20.23
	1907.6	20.11
HSUPA Subtest 3	1852.4	20.75
	1880.0	20.23
	1907.6	20.25
HSUPA Subtest 4	1852.4	19.32
	1880.0	19.54
	1907.6	19.33
HSUPA Subtest 5	1852.4	19.23
	1880.0	19.32
	1907.6	19.34

UMTS BAND V

Mode	Frequency (MHz)	Maximum Burst-Average Output Power
WCDMA 850 RMC	826.4	22.16
	835.0	22.37
	846.6	22.08
WCDMA 850 AMR	826.4	21.43
	835.0	21.21
	846.6	21.35
HSDPA Subtest 1	826.4	20.64
	835.0	20.29
	846.6	20.31
HSDPA Subtest 2	826.4	20.36
	835.0	20.52
	846.6	20.49
HSDPA Subtest 3	826.4	20.24
	835.0	20.37
	846.6	20.35
HSDPA Subtest 4	826.4	19.19
	835.0	19.54
	846.6	19.20
HSUPA Subtest 1	826.4	21.15
	835.0	21.72
	846.6	21.43
HSUPA Subtest 2	826.4	20.66
	835.0	20.51
	846.6	20.20
HSUPA Subtest 3	826.4	20.13
	835.0	20.68
	846.6	20.29
HSUPA Subtest 4	826.4	19.54
	835.0	19.74
	846.6	19.45
HSUPA Subtest 5	826.4	19.58
	835.0	19.67
	846.6	19.36

5.2 Radiated Output Power

5.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603-D-2010 were applied.

- 1 In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (P_{in}) is applied to the input of the dipole, and the power received (P_r) at the chamber's probe antenna is recorded.
- 2 The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as $AR_{pl} = P_{in} + 2.15 - P_r$. The AR_{pl} is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: $Power = P_{Mea} + AR_{pl}$
- 3 The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4 From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5 The EUT is then put into continuously transmitting mode at its maximum power level.
- 6 Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
- 7 This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (P_{in}).
- 8 ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15dBi$.
9. Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.2.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Mode	Nominal Peak Power
GSM 850	≤ 38.45 dBm (7W)
PCS 1900	≤ 33 dBm (2W)
UMTS BANDV	≤ 38.45 dBm (7W)

5.2.3 MEASUREMENT RESULT

Radiated Power (E.I.R.P) for GSM 850 MHZ							
Mode	Frequency	Substituted Level (dBm)	Antenna Polarization	Antenna Gain (dBi)	Cable loss (dB)	Absolute Level (dBm)	Conclusion
GSM 850	824.2	24.25	Horizontal	6.4	0.52	30.13	Pass
	824.2	24.34	Vertical	6.4	0.52	30.22	Pass
	836.6	24.04	Horizontal	6.4	0.52	29.92	Pass
	836.6	24.05	Vertical	6.4	0.52	29.93	Pass
	848.8	24.07	Horizontal	6.5	0.52	30.05	Pass
	848.8	24.09	Vertical	6.5	0.52	30.07	Pass

Radiated Power (E.I.R.P) for GPRS 850 MHZ							
Mode	Frequency	Substituted Level (dBm)	Antenna Polarization	Antenna Gain (dBi)	Cable loss (dB)	Absolute Level (dBm)	Conclusion
GPRS 850	824.2	24.03	Horizontal	6.4	0.52	29.91	Pass
	824.2	24.27	Vertical	6.4	0.52	30.15	Pass
	836.6	23.74	Horizontal	6.4	0.52	29.62	Pass
	836.6	24.06	Vertical	6.4	0.52	29.94	Pass
	848.8	23.81	Horizontal	6.5	0.52	29.79	Pass
	848.8	23.94	Vertical	6.5	0.52	29.92	Pass

Radiated Power (E.I.R.P) for EGPRS 850 MHZ							
Mode	Frequency	Substituted Level (dBm)	Antenna Polarization	Antenna Gain (dBi)	Cable loss (dB)	Absolute Level (dBm)	Conclusion
EGPRS 850	824.2	23.88	Horizontal	6.4	0.52	29.76	Pass
	824.2	24.13	Vertical	6.4	0.52	30.01	Pass
	836.6	23.63	Horizontal	6.4	0.52	29.51	Pass
	836.6	23.9	Vertical	6.4	0.52	29.78	Pass
	848.8	23.75	Horizontal	6.5	0.52	29.73	Pass
	848.8	23.84	Vertical	6.5	0.52	29.82	Pass

Radiated Power (E.I.R.P) for PCS 1900 MHZ							
Mode	Frequency	Substituted Level (dBm)	Antenna Polarization	Antenna Gain (dBi)	Cable loss (dB)	Absolute Level (dBm)	Conclusion
PCS 1900	1850.2	22.37	Horizontal	8.13	0.96	29.54	Pass
	1850.2	21.72	Vertical	8.13	0.96	28.89	Pass
	1880.0	22.29	Horizontal	8.14	0.96	29.47	Pass
	1880.0	21.77	Vertical	8.14	0.96	28.95	Pass
	1909.8	21.83	Horizontal	8.14	0.96	29.01	Pass
	1909.8	21.48	Vertical	8.14	0.96	28.66	Pass

Radiated Power (E.I.R.P) for GPRS 1900 MHZ							
Mode	Frequency	Substituted Level (dBm)	Antenna Polarization	Antenna Gain (dBi)	Cable loss (dB)	Absolute Level (dBm)	Conclusion
GPRS 1900	1850.2	21.27	Horizontal	8.13	0.96	28.44	Pass
	1850.2	21.52	Vertical	8.13	0.96	28.69	Pass
	1880.0	20.79	Horizontal	8.14	0.96	27.97	Pass
	1880.0	20.83	Vertical	8.14	0.96	28.01	Pass
	1909.8	21.44	Horizontal	8.14	0.96	28.62	Pass
	1909.8	20.8	Vertical	8.14	0.96	27.98	Pass

Radiated Power (E.I.R.P) for EGPRS 1900 MHZ							
Mode	Frequency	Substituted Level (dBm)	Antenna Polarization	Antenna Gain (dBi)	Cable loss (dB)	Absolute Level (dBm)	Conclusion
EGPRS 1900	1850.2	21.24	Horizontal	8.13	0.96	28.41	Pass
	1850.2	21.46	Vertical	8.13	0.96	28.63	Pass
	1880.0	20.74	Horizontal	8.14	0.96	27.92	Pass
	1880.0	20.55	Vertical	8.14	0.96	27.73	Pass
	1909.8	21.24	Horizontal	8.14	0.96	28.42	Pass
	1909.8	20.45	Vertical	8.14	0.96	27.63	Pass

Radiated Power (E.I.R.P) for UMTS band II							
Mode	Frequency	Substituted Level (dBm)	Antenna Polarization	Antenna Gain (dBi)	Cable loss (dB)	Absolute Level (dBm)	Conclusion
RMC 12.2kbps	1852.4	15.47	Horizontal	8.13	0.96	22.64	Pass
	1852.4	15.27	Vertical	8.13	0.96	22.44	Pass
	1880.0	15.38	Horizontal	8.14	0.96	22.56	Pass
	1880.0	14.68	Vertical	8.14	0.96	21.86	Pass
	1907.6	14.79	Horizontal	8.14	0.96	21.97	Pass
	1907.6	14.83	Vertical	8.14	0.96	22.01	Pass

Radiated Power (E.I.R.P) for UMTS band V							
Mode	Frequency	Substituted Level (dBm)	Antenna Polarization	Antenna Gain (dBi)	Cable loss (dB)	Absolute Level (dBm)	Conclusion
RMC 12.2kbps	826.4	16.18	Horizontal	6.4	0.52	22.06	Pass
	826.4	16.61	Vertical	6.4	0.52	22.49	Pass
	836.6	15.93	Horizontal	6.4	0.52	21.81	Pass
	836.6	16.06	Vertical	6.4	0.52	21.94	Pass
	846.6	15.84	Horizontal	6.5	0.52	21.82	Pass
	846.6	16.17	Vertical	6.5	0.52	22.15	Pass

NOTE 1: in the part, result the worst case GPRS 1slot for GSM 850 and PCS1900, and RMC 12.2kbps for band II and band v.

6. SPURIOUS EMISSION

6.1 CONDUCTED SPURIOUS EMISSION

6.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1, Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.

2, Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM 850 MHz	
Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

Typical Channels for testing of PCS 1900 MHz	
Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8

Typical Channels for testing of UMTS band II	
Channel	Frequency (MHz)
9262	1852.4
9400	1880.0
9538	1907.6

Typical Channels for testing of UMTS band V	
Channel	Frequency (MHz)
4132	826.4
4183	836.6
4233	846.6

6.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

6.1.3 MEASUREMENT RESULT

PLEASE REFER TO : APPENDIX I TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

Note: 1. Below 30MHZ no Spurious found and The GSM modes is the worst condition.
2. As no emission found in standby or receive mode, no recording in this report.

6.2 Radiated Spurious Emission

6.2.1 MEASUREMENT METHOD


Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power and at the appropriate frequencies. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

The procedure of radiated spurious emissions is as follows:


1. The testing follows FCC KDB 971168 D01 Section 5.8 and ANSI/TIA-603-D-2010 – Section 2.2.12
2. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span/RBW
6. Detector = Peak
7. Trace mode = max hold
8. The trace was allowed to stabilize

TEST SETUP

For radiated test from 30MHz to 1GHz

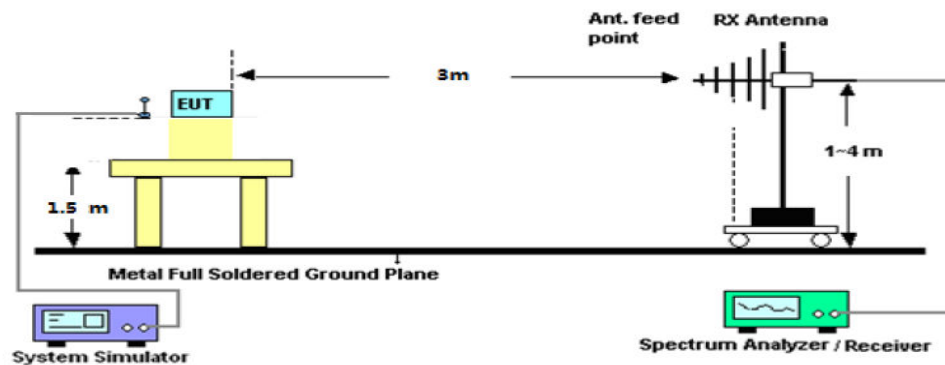

For radiated test from above 1GHz

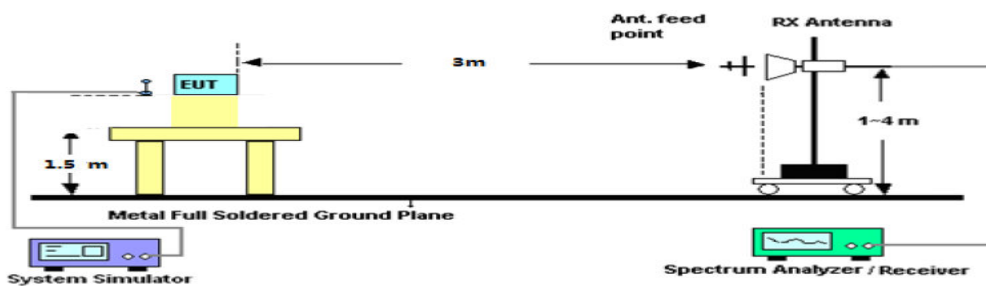

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS 1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz), GSM850 band (824.2MHz, 836.6MHz, 848.8MHz), UMTS band II(1852.4MHz, 1880MHz, 1907.6MHz), UMTS band V(826.4MHz, 836.6MHz, 846.6MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: $Power = P_{Mea} + A_{Rpl}$

6.2.2 PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Note: only result the worst condition of each test mode:

6.2.3 MEASUREMENT RESULT

GSM 850:

Test Results for Channel 128/824.2 MHz					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity
1648.4	-31.21	7.8	-23.41	-13.00	Vertical
1648.4	-31.14	7.8	-23.34	-13.00	Horizontal
2472.6	-31.43	11	-20.43	-13.00	Vertical
2472.6	-31.17	11	-20.17	-13.00	Horizontal
3296.8	-31.35	12.3	-19.05	-13.00	Horizontal
3296.8	-31.12	12.3	-18.82	-13.00	Vertical
Test Results for Channel 190/836.6 MHz					
1673.2	-33.12	8	-25.12	-13.00	Vertical
1673.2	-32.35	8	-24.35	-13.00	Horizontal
2509.8	-31.34	11.2	-20.14	-13.00	Vertical
2509.8	-31.51	11.2	-20.31	-13.00	Horizontal
3346.4	-32.42	12.6	-19.82	-13.00	Horizontal
3346.4	-32.62	12.6	-20.02	-13.00	Vertical
Test Results for Channel 251/848.8 MHz					
1697.6	-30.43	8.1	-22.33	-13.00	Vertical
1697.6	-30.22	8.1	-22.12	-13.00	Horizontal
2546.4	-32.35	11.69	-20.66	-13.00	Vertical
2546.4	-33.12	11.69	-21.43	-13.00	Horizontal
3395.2	-33.41	12.92	-20.49	-13.00	Horizontal
3395.2	-32.34	12.92	-19.42	-13.00	Vertical

NOTE:

- 1.All other emissions more than 30dB below the limit.
- 2.ALL mode were investigating.The results above show only the worst case.

PCS 1900:

Test Results for Channel 512/1850.2MHz					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity
3700.4	-34.02	13.42	-20.6	-13.00	Horizontal
3700.4	-35.26	13.42	-21.84	-13.00	Vertical
5550.6	-33.96	17.12	-16.84	-13.00	Vertical
5550.6	-31.57	17.12	-14.45	-13.00	Horizontal
7400.8	-35.85	19.26	-16.59	-13.00	Horizontal
7400.8	-35.48	19.26	-16.22	-13.00	Vertical
Test Results for Channel 661/1880.0MHz					
3760	-36.95	13.76	-23.19	-13.00	Horizontal
3760	-34.74	13.76	-20.98	-13.00	Vertical
5640	-35.26	17.56	-17.7	-13.00	Vertical
5640	-39.98	17.56	-22.42	-13.00	Horizontal
7520	-38.97	19.6	-19.37	-13.00	Horizontal
7520	-39.41	19.6	-19.81	-13.00	Vertical
Test Results for Channel 810/1909.8MHz					
3819.6	-35.95	13.87	-22.08	-13.00	Horizontal
3819.6	-31.48	13.87	-17.61	-13.00	Vertical
5729.4	-36.59	17.66	-18.93	-13.00	Vertical
5729.4	-34.56	17.66	-16.9	-13.00	Horizontal
7639.2	-40.14	19.75	-20.39	-13.00	Horizontal
7639.2	-39.97	19.75	-20.22	-13.00	Vertical

NOTE:

- 1.All other emissions more than 30dB below the limit.
- 2.ALL mode were investigating.The results above show only the worst case.

UMTS band II:

Test Results for Channel 9262/1852.4MHz					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity
3700.8	-32.06	13.42	-18.64	-13.00	Horizontal
3700.8	-31.69	13.42	-18.27	-13.00	Vertical
5551.2	-36.55	17.12	-19.43	-13.00	Vertical
5551.2	-34.51	17.12	-17.39	-13.00	Horizontal
Test Results for Channel 9400/1880MHz					
3760	-32.26	13.76	-18.5	-13.00	Horizontal
3760	-31.41	13.76	-17.65	-13.00	Vertical
5640	-40.59	17.56	-23.03	-13.00	Vertical
5640	-39.68	17.56	-22.12	-13.00	Horizontal
Test Results for Channel 9538/1907.6MHz					
3819.2	-35.64	13.87	-21.77	-13.00	Horizontal
3819.2	-35.29	13.87	-21.42	-13.00	Vertical
5728.8	-39.67	17.66	-22.01	-13.00	Vertical
5728.8	-36.41	17.66	-18.75	-13.00	Horizontal

NOTE:

- 1.All other emissions more than 30dB below the limit.
- 2.ALL mode were investigatingated.The results above show only the worst case.

UMTS band V:

Test Results for Channel 4233/846.6MHz					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity
1673.2	-29.64	8.1	-21.54	-13.00	Vertical
1673.2	-30.45	8.1	-22.35	-13.00	Horizontal
2509.8	-32.23	11.69	-20.54	-13.00	Horizontal
2509.8	-34.34	11.69	-22.65	-13.00	Vertical
3346.4	-34.49	12.92	-21.57	-13.00	Horizontal
3346.4	-39.77	12.92	-26.85	-13.00	Vertical
Test Results for Channel 4182/836.4MHz					
1672.8	-31.36	8	-23.36	-13.00	Vertical
1672.8	-30.24	8	-22.24	-13.00	Horizontal
2509.2	-31.63	11.2	-20.43	-13.00	Horizontal
2509.2	-33.46	11.2	-22.26	-13.00	Vertical
3345.6	-31.25	12.6	-18.65	-13.00	Horizontal
3345.6	-32.31	12.6	-19.71	-13.00	Vertical
Test Results for Channel 4132/826.4MHz					
1652.8	-30.23	8	-22.23	-13.00	Vertical
1652.8	-31.42	8	-23.42	-13.00	Horizontal
2479.2	-31.41	11.2	-20.21	-13.00	Horizontal
2479.2	-30.45	11.2	-19.25	-13.00	Vertical
3305.6	-32.33	12.6	-19.73	-13.00	Horizontal
3305.6	-29.71	12.6	-17.11	-13.00	Vertical

Note: Below 30MHz no Spurious found.

1.All other emissions more than 30dB below the limit.

2.ALL mode were investigating.The results above show only the worst case.

7. FREQUENCY STABILITY

7.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1 , Measure the carrier frequency at room temperature.
- 2 , Subject the EUT to overnight soak at -10°C.
- 3 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 band , channel 190 for GSM 850 band, channel 9400 for UMTS band II and channel 4175 for UMTS band V measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4 , Repeat the above measurements at 10°C increments from -10°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5 , Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6 , Subject the EUT to overnight soak at +50°C.
- 7 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8 , Repeat the above measurements at 10°C increments from +50°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9 , At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

7.2 PROVISIONS APPLICABLE

7.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

7.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20°C.

7.3 MEASUREMENT RESULT

Frequency Error Against Voltage for GSM 850 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.5	31	0.037
3.7	19	0.023
4.2	14	0.017

Frequency Error Against Temperature for GSM 850 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-10	38	0.045
0	27	0.032
10	25	0.030
20	19	0.023
30	22	0.026
40	27	0.032
50	33	0.039

Note: The EUT doesn't work below -10°C

Frequency Error Against Voltage for GPRS 850 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.5	33	0.039
3.7	20	0.024
4.2	17	0.020

Frequency Error Against Temperature for GPRS 850 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-10	35	0.042
0	24	0.029
10	28	0.033
20	17	0.020
30	22	0.026
40	26	0.031
50	37	0.044

Note: The EUT doesn't work below -10°C

Frequency Error Against Voltage for EGPRS 850 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.5	32	0.038
3.7	24	0.029
4.2	12	0.014

Frequency Error Against Temperature for EGPRS 850 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-10	34	0.041
0	23	0.027
10	27	0.032
20	15	0.018
30	24	0.029
40	25	0.030
50	30	0.036

Note: The EUT doesn't work below -10°C

Frequency Error Against Voltage for PCS 1900 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.5	21	0.011
3.7	34	0.018
4.2	25	0.013

Frequency Error Against Temperature for PCS 1900 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-10	29	0.015
0	24	0.013
10	32	0.017
20	37	0.020
30	20	0.011
40	18	0.010
50	17	0.009

Note: The EUT doesn't work below -10°C

Frequency Error Against Voltage for GPRS 1900 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.5	23	0.012
3.7	31	0.016
4.2	27	0.014

Frequency Error Against Temperature for GPRS 1900 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-10	25	0.013
0	23	0.012
10	35	0.019
20	33	0.018
30	23	0.012
40	12	0.006
50	15	0.008

Note: The EUT doesn't work below -10°C

Frequency Error Against Voltage for EGPRS 1900 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.5	27	0.014
3.7	33	0.018
4.2	22	0.012

Frequency Error Against Temperature for EGPRS 1900 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-10	22	0.012
0	27	0.014
10	31	0.016
20	35	0.019
30	23	0.012
40	12	0.006
50	15	0.008

Note: The EUT doesn't work below -10°C

Frequency Error Against Voltage for UMTS band II		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.5	22	0.012
3.7	19	0.010
4.2	26	0.014

Frequency Error Against Temperature for UMTS band II		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-10	34	0.018
0	31	0.016
10	18	0.010
20	36	0.019
30	37	0.020
40	25	0.013
50	19	0.010

Note: The EUT doesn't work below -10°C

Frequency Error Against Voltage for UMTS band V		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.5	28	0.033
3.7	15	0.018
4.2	23	0.027

Frequency Error Against Temperature for UMTS band V		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-10	33	0.039
0	26	0.031
10	31	0.037
20	19	0.023
30	24	0.029
40	19	0.023
50	27	0.032

Note: The EUT doesn't work below -10°C


8. BANDWIDTH

8.1 APPLICABLE STANDARD

FCC §2.1049, §22.917, §22.905 and §24.238.

8.2 Test Procedure

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers.
3. Details according with KDB 971168 section 4.1 & 4.2.

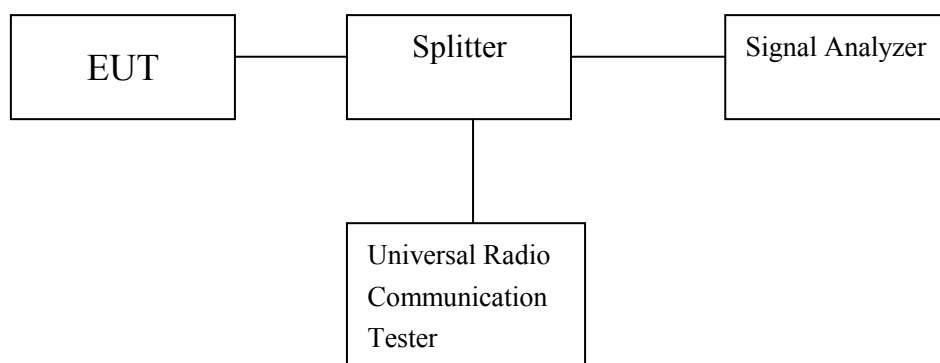

Test Equipment List and Details

Refer a test equipment and calibration data table in this test report.

8.3 MEASUREMENT RESULT

Occupied Bandwidth (99%) for GSM 850 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	824.2	244.393
Middle Channel	836.6	245.689
High Channel	848.8	242.196

Occupied Bandwidth (99%) for PCS 1900 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	1850.2	244.076
Middle Channel	1880.0	250.017
High Channel	1909.8	242.912

Occupied Bandwidth (99%) for GPRS 850 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	824.2	244.537
Middle Channel	836.6	243.568
High Channel	848.8	247.644

Occupied Bandwidth (99%) for GPRS 1900 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	1850.2	244.035
Middle Channel	1880.0	243.109
High Channel	1909.8	246.649

Occupied Bandwidth (99%) for EGPRS 850 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	824.2	243.282
Middle Channel	836.6	240.883
High Channel	848.8	244.906

Occupied Bandwidth (99%) for EGPRS 1900 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	1850.2	247.763
Middle Channel	1880.0	239.646
High Channel	1909.8	243.433

Occupied Bandwidth (99%) for UMTS band II		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(MHz)
Low Channel	1852.4	4.164
Middle Channel	1880.0	4.170
High Channel	1907.6	4.168

Occupied Bandwidth (99%) for UMTS band V		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(MHz)
Low Channel	826.4	4.162
Middle Channel	836.4	4.156
High Channel	846.6	4.152

Emission Bandwidth (-26dBc) for GSM 850 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	824.2	317.514
Middle Channel	836.6	318.268
High Channel	848.8	308.743

Emission Bandwidth (-26dBc) for PCS 1900 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	1850.2	315.910
Middle Channel	1880.0	323.802
High Channel	1909.8	315.447

Emission Bandwidth (-26dBc) for GPRS 850 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	824.2	318.316
Middle Channel	836.6	311.915
High Channel	848.8	322.406

Emission Bandwidth (-26dBc) for GPRS 1900 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	1850.2	320.357
Middle Channel	1880.0	314.336
High Channel	1909.8	318.427

Emission Bandwidth (-26dBc) for EGPRS 850 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	824.2	315.584
Middle Channel	836.6	313.986
High Channel	848.8	323.942

Emission Bandwidth (-26dBc) for EGPRS 1900 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	1850.2	318.597
Middle Channel	1880.0	316.008
High Channel	1909.8	316.501

Emission Bandwidth (-26dBc) for UMTS band II		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)
Low Channel	1852.4	4.728
Middle Channel	1880.0	4.696
High Channel	1907.6	4.749

Emission Bandwidth (-26dBc) for UMTS band V		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)
Low Channel	826.4	4.715
Middle Channel	836.4	4.712
High Channel	846.6	4.691

9. BAND EDGE


9.1 Applicable Standard

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

9.2 Test Procedure

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The Band Edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.
3. Details according with KDB 971168 section 6.0.

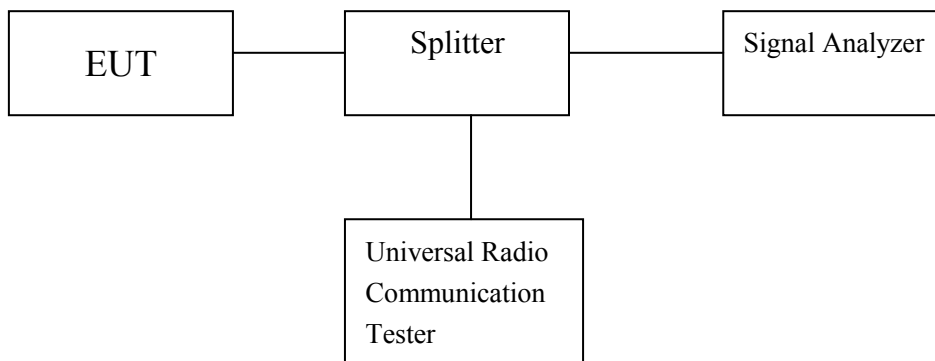

Test Equipment List and Details

Refer a test equipment and calibration data table in this test report.

9.3 MEASUREMENT RESULT

Please refers to Appendix III for compliance test plots for band edges

10. Peak-to-Average Ratio

DESCRIPTION OF THE PAR MEASUREMENT

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


10.1 MEASURING INSTRUMENTS

See list of measuring instruments of this test report.

10.2 TEST PROCEDURES

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. For GSM/EGPRS operating modes:
 - a. Set the RBW = 1MHz, VBW = 1MHz, Peak detector in spectrum analyzer.
 - b. Set EUT in maximum power output, and triggered the burst signal.
 - c. Measured respectively the Peak level and Mean level, and the deviation was recorded as Peak to Average Ratio.
4. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

10.3 TEST SETUP

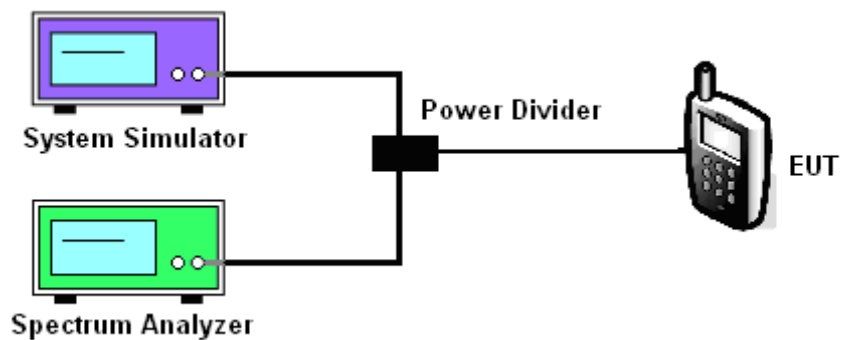

10.4 TEST RESULT OF PEAK-TO-AVERAGE RATIO


Cellular Band						
Modes	GSM850			GSM1900		
Channel	128 (Low)	190 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency(MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	0.33	0.21	0.22	0.22	0.24	0.00
Cellular Band						
Modes	WCDMA Band II (RMC 12.2Kbps)			WCDMA Band V (RMC 12.2Kbps)		
Channel	9262 (Low)	9400 (Mid)	9538 (High)	4132 (Low)	4175 (Mid)	4233 (High)
Frequency(MHz)	1852.4	1880	1907.6	826.4	836.6	846.6
Peak-to-Average Ratio (dB)	2.31	2.90	2.21	2.69	2.30	2.11

Cellular Band						
Modes	GPRS850			GPRS1900		
Channel	128 (Low)	190 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency(MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	0.31	0.24	0.25	0.21	0.23	0.01
Cellular Band						
Modes	EGPRS850			EGPRS1900		
Channel	128 (Low)	190 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency(MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	2.32	2.91	2.23	2.61	2.33	2.14


APPENDIX I

TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION


CONDUCTED EMISSION IN GSM 850 BAND
Conducted Emission Transmitting Mode CH 128 30MHz – 5GHz

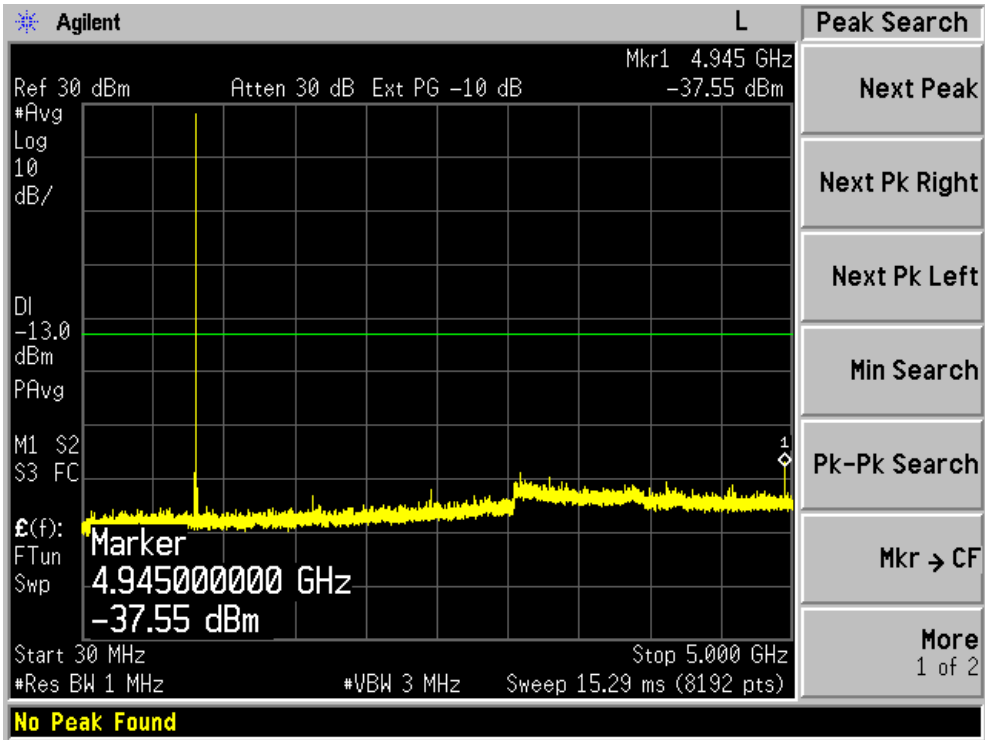


Conducted Emission Transmitting Mode CH 128 5GHz – 10GHz

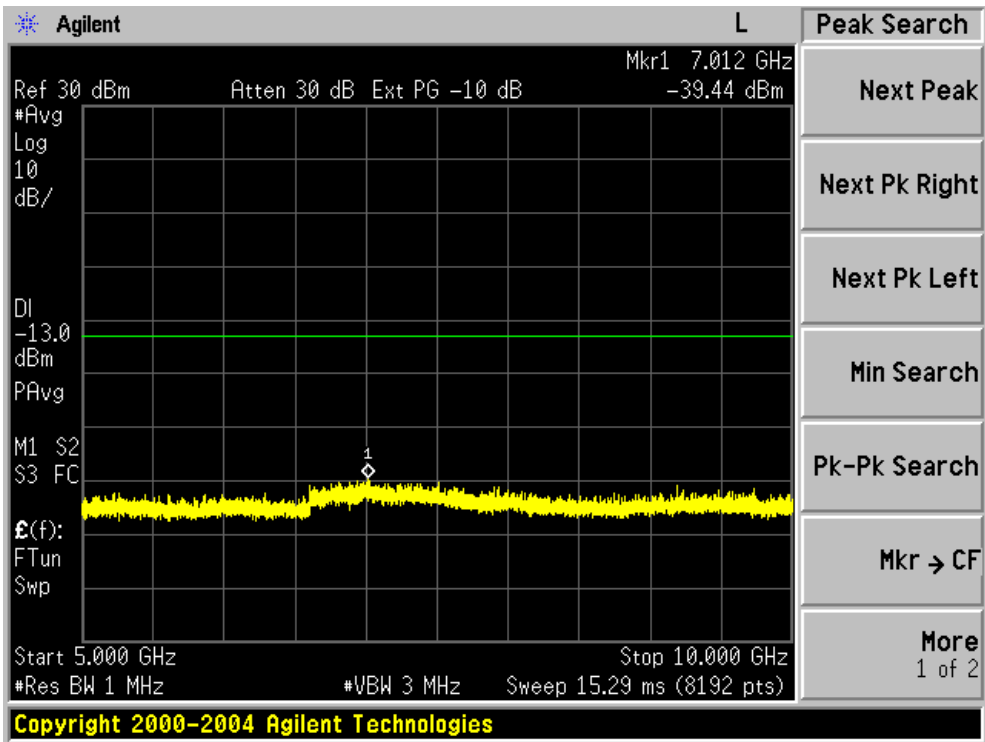


Conducted Emission Transmitting Mode CH 190 30MHz – 5GHz

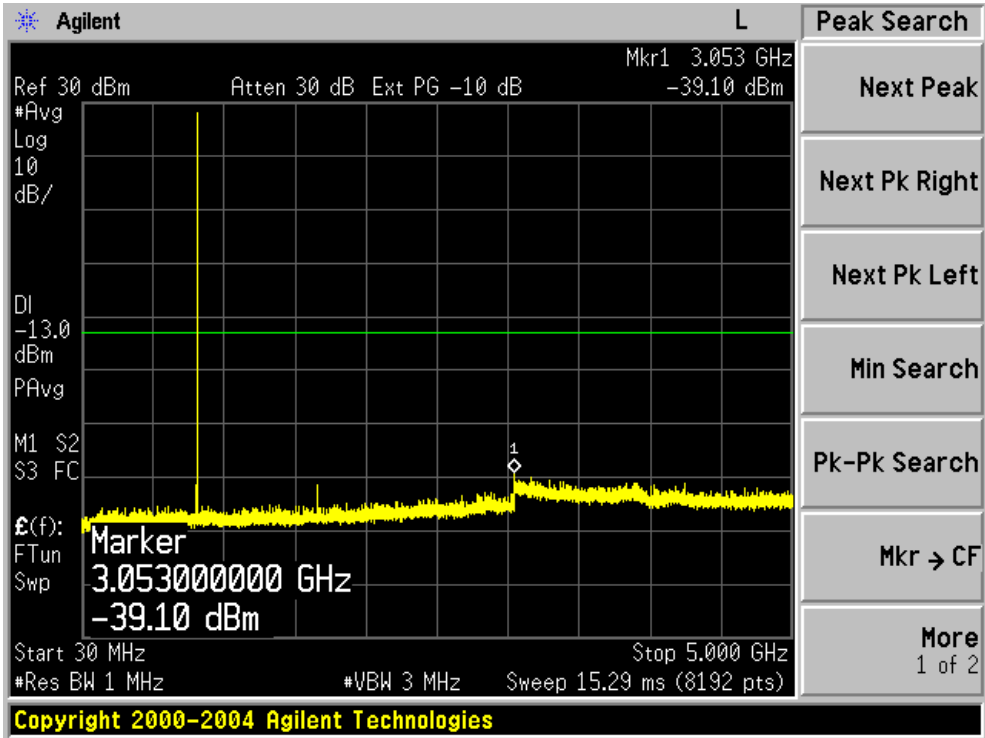


Conducted Emission Transmitting Mode CH 190 5GHz – 10GHz

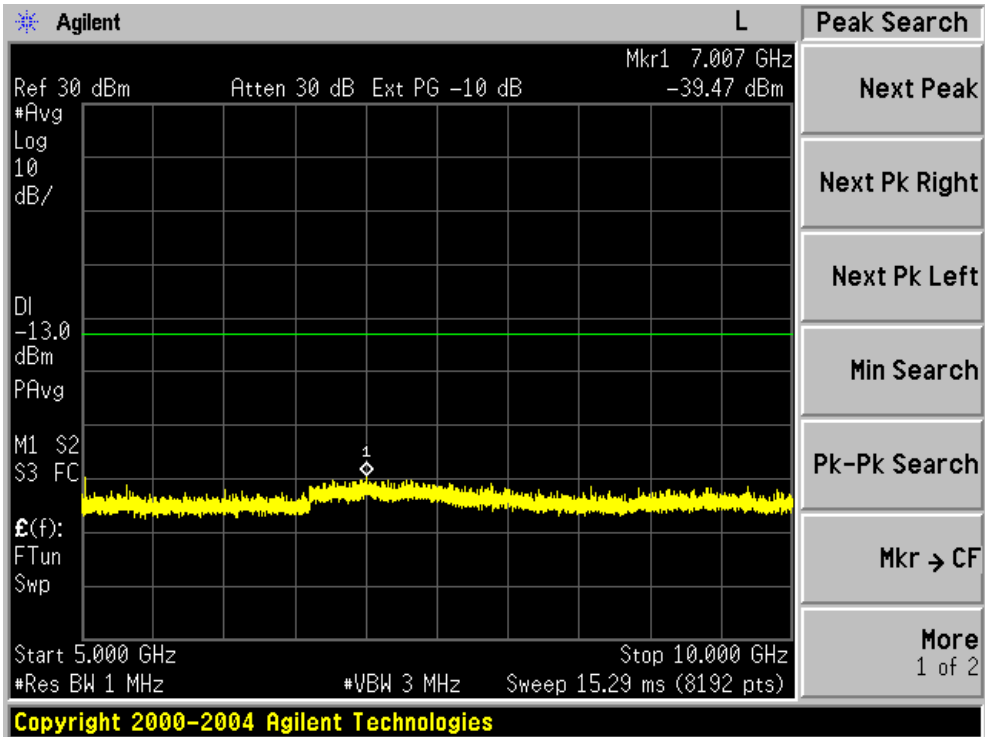


Conducted Emission Transmitting Mode CH 251 30MHz – 5GHz

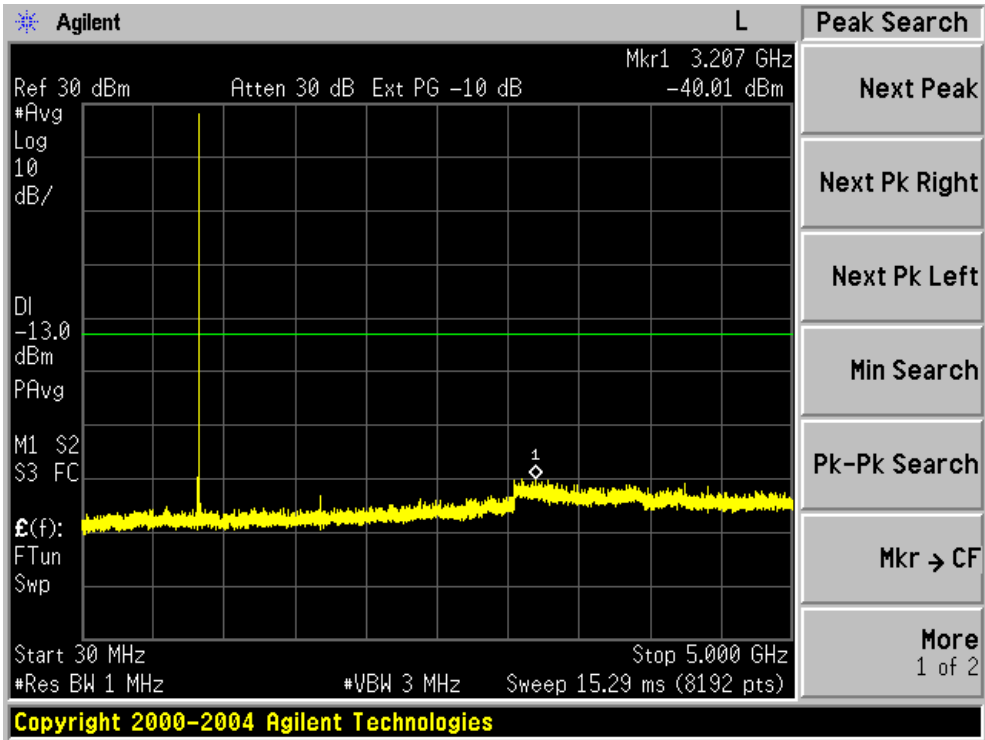


Conducted Emission Transmitting Mode CH 251 5GHz – 10GHz

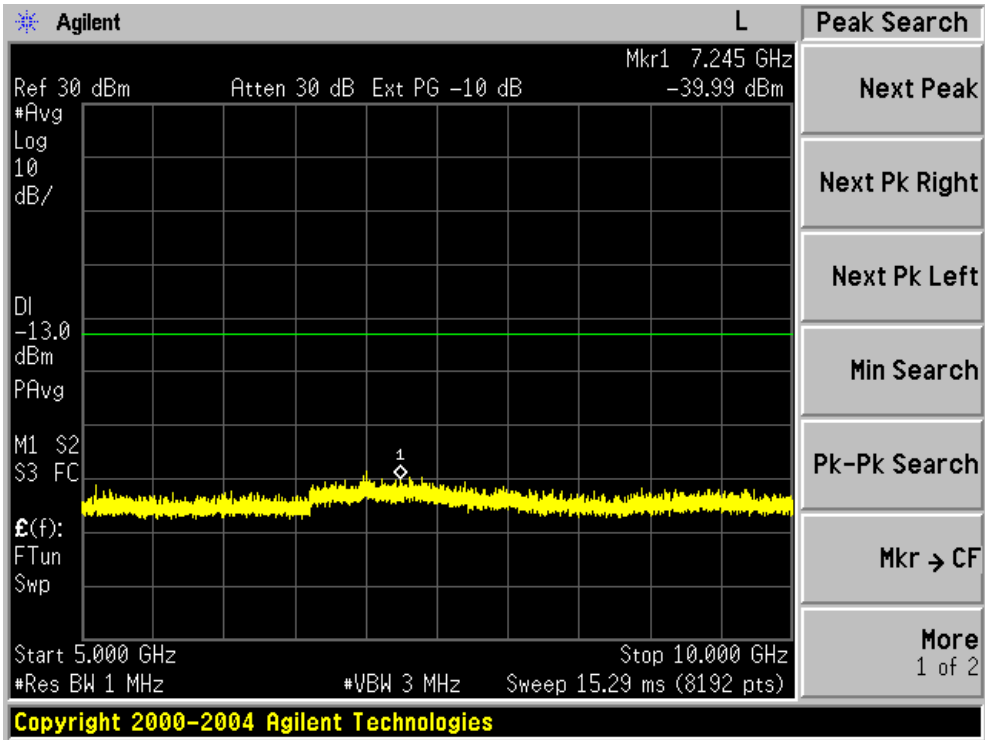


CONDUCTED EMISSION IN PCS1900 BAND
Conducted Emission Transmitting Mode CH 512 30MHz – 10GHz

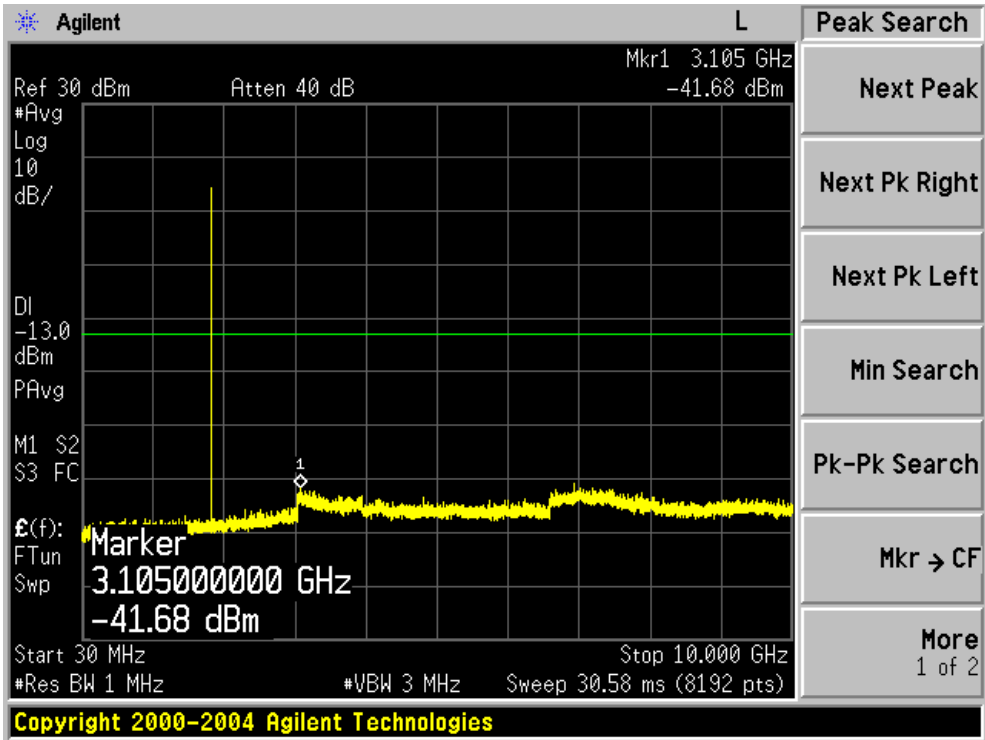


Conducted Emission Transmitting Mode CH 512 10GHz – 20GHz

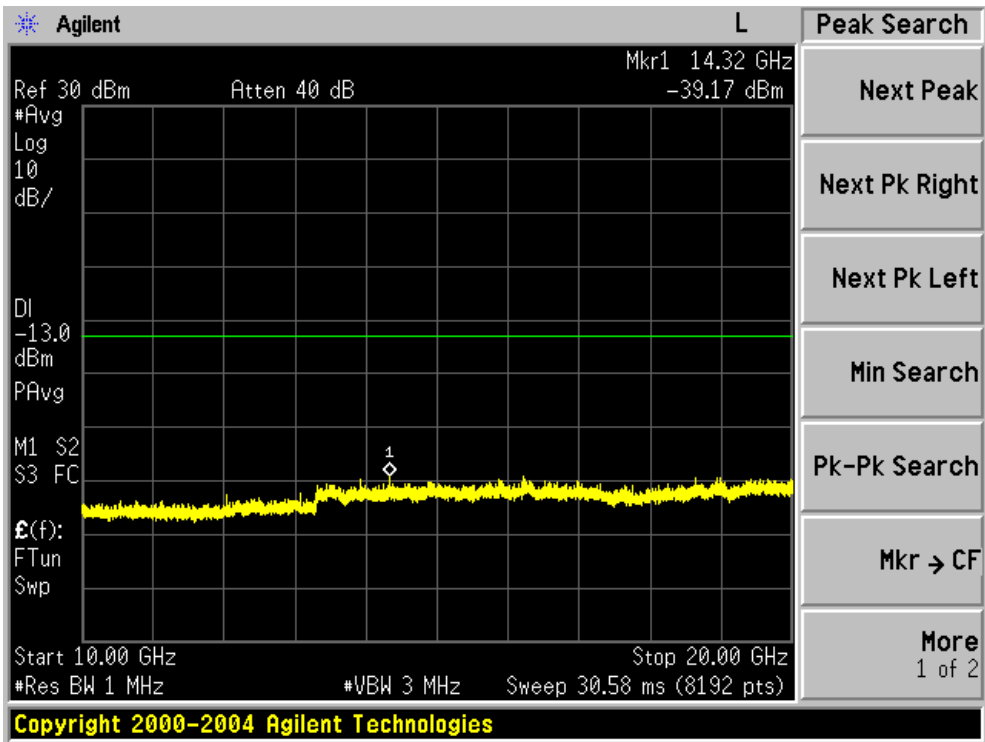


Conducted Emission Transmitting Mode CH 661 30MHz – 10GHz

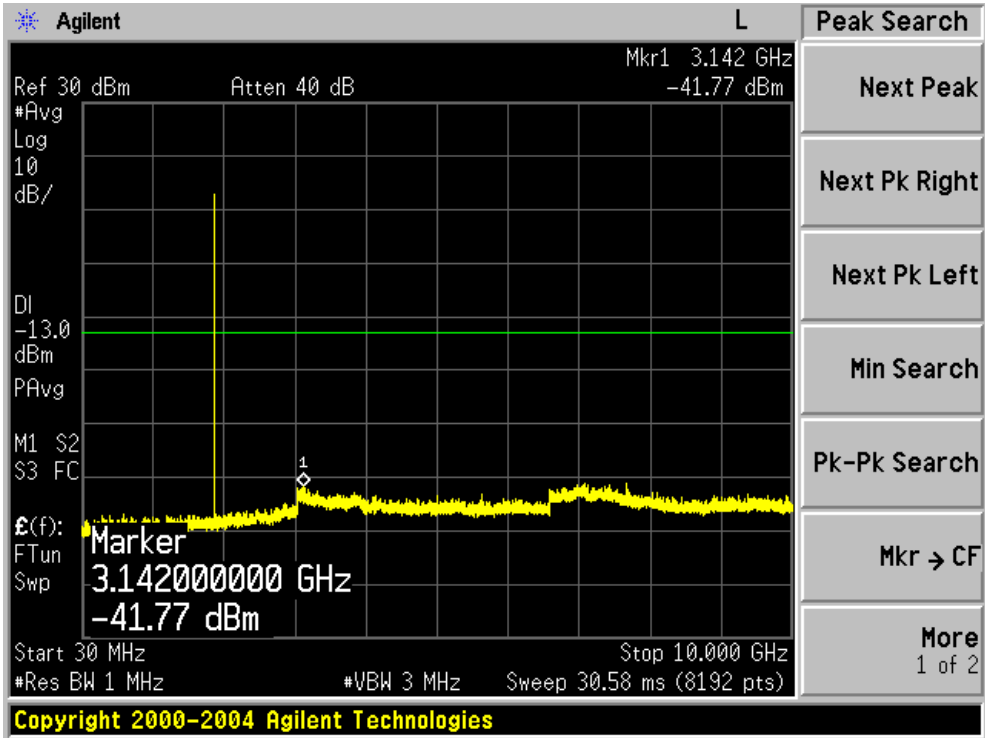


Conducted Emission Transmitting Mode CH 661 10GHz – 20GHz

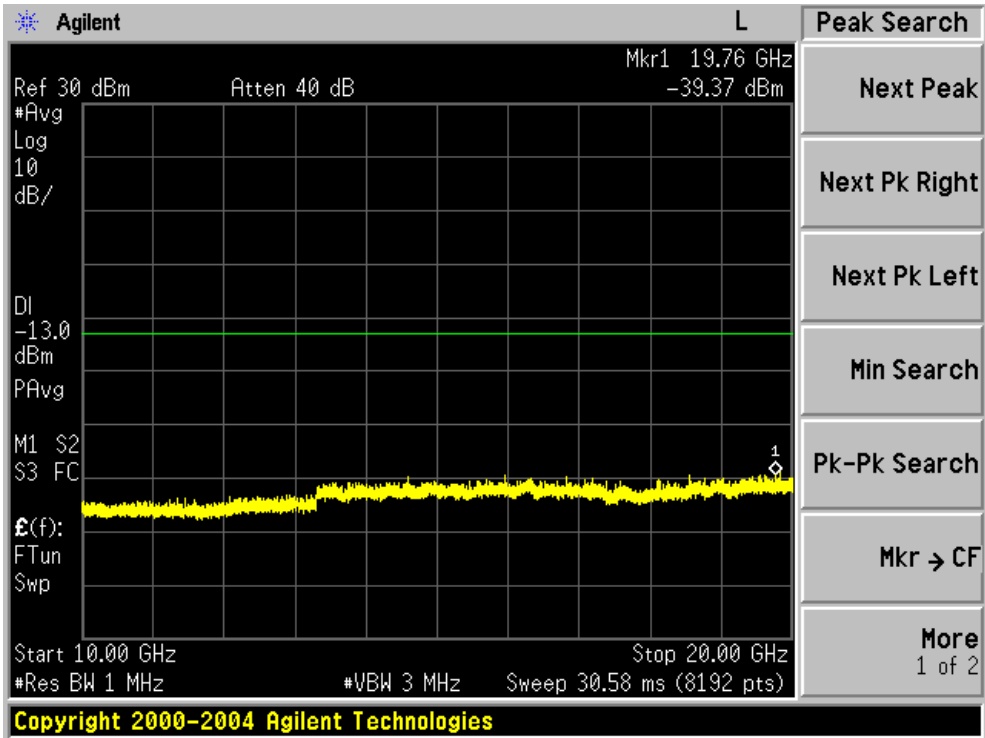


Conducted Emission Transmitting Mode CH 810 30MHz – 10GHz

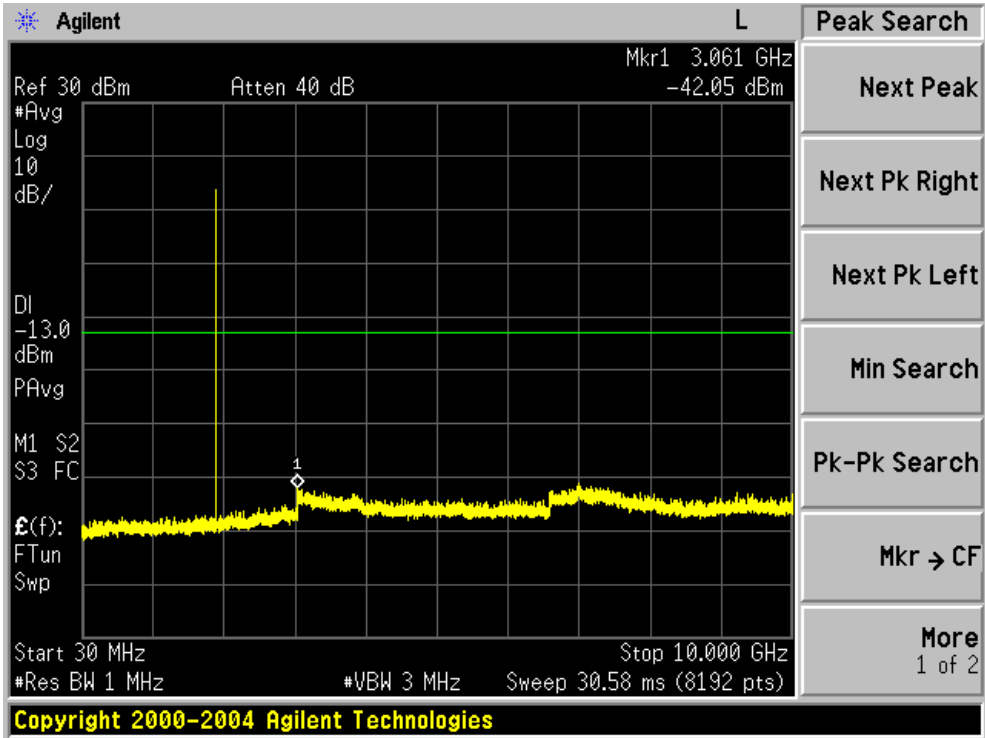


Conducted Emission Transmitting Mode CH 810 10GHz – 20GHz

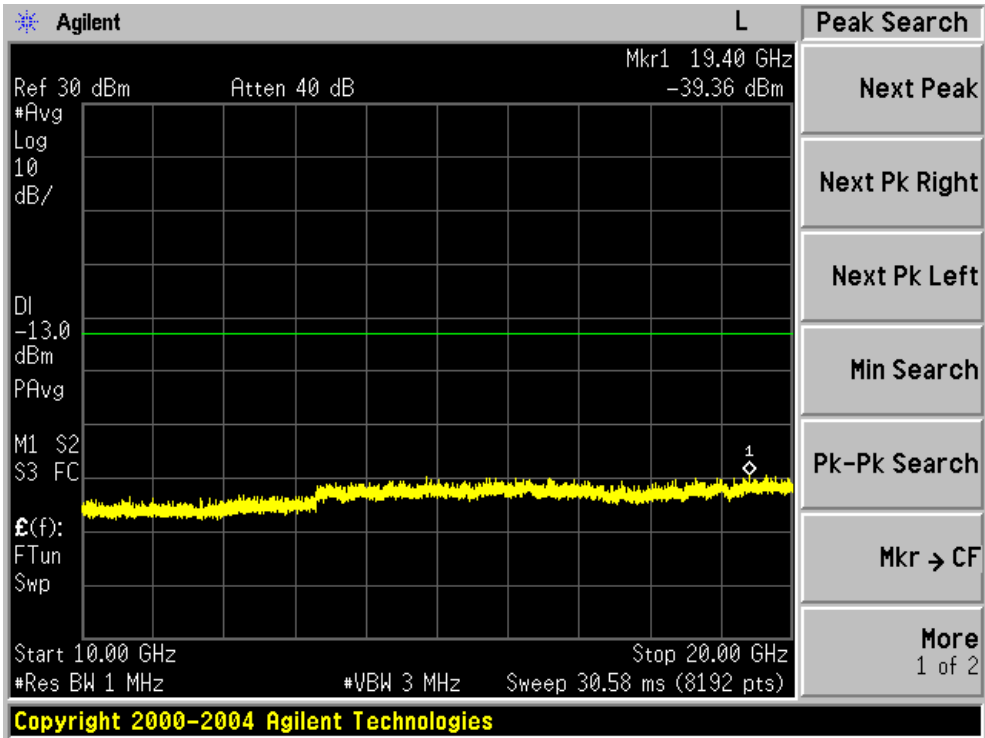


CONDUCTED EMISSION IN GPRS850 BAND
Conducted Emission Transmitting Mode CH 128 30MHz – 5GHz

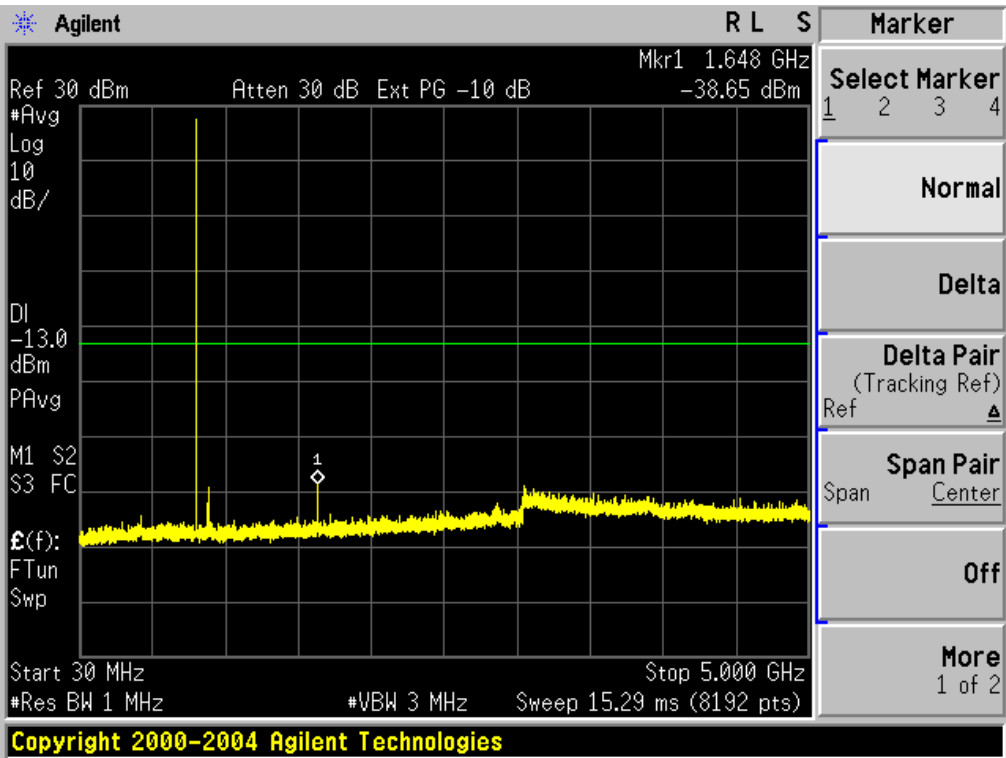


Conducted Emission Transmitting Mode CH 128 5GHz – 10GHz

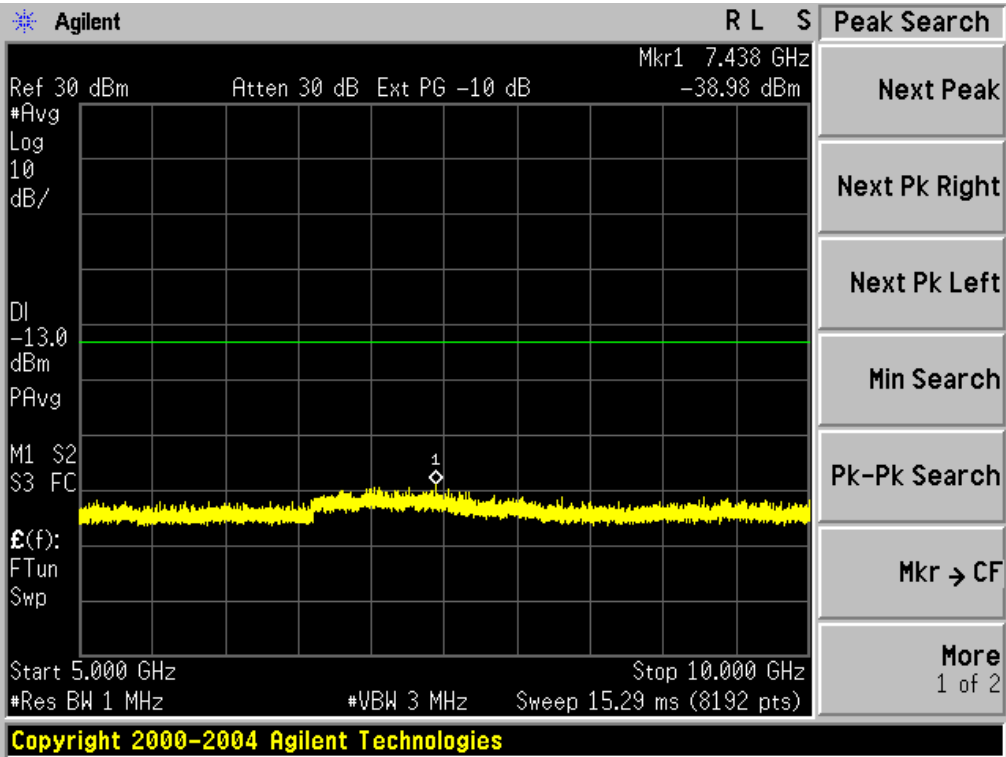


Conducted Emission Transmitting Mode CH 190 30MHz – 5GHz

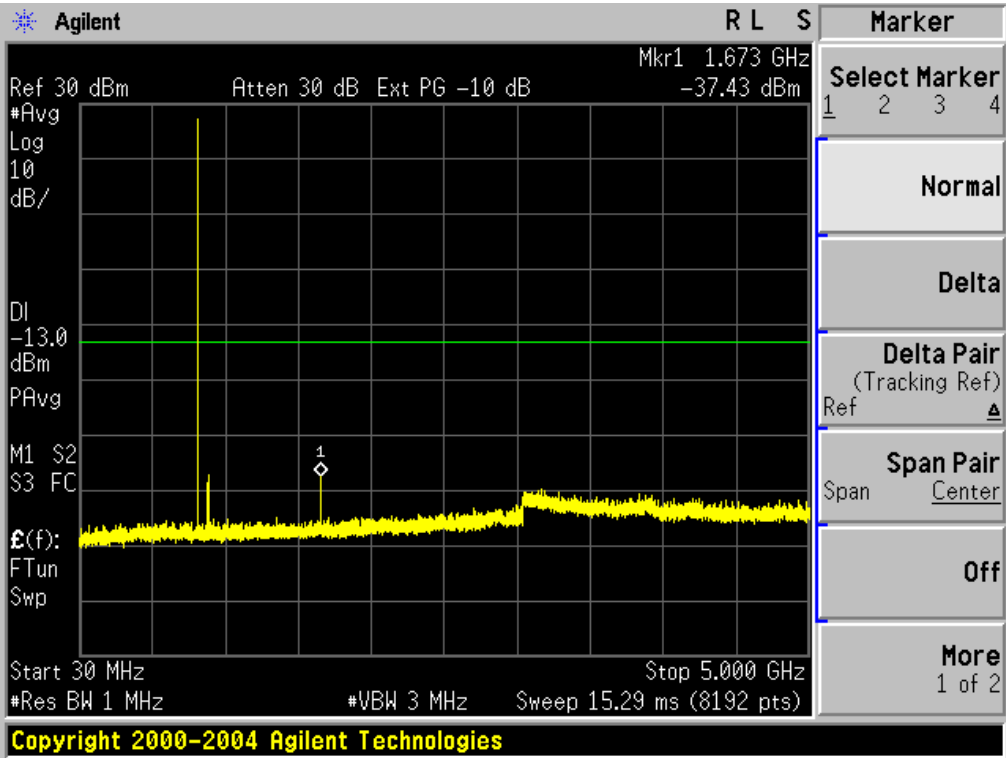


Conducted Emission Transmitting Mode CH 190 5GHz – 10GHz

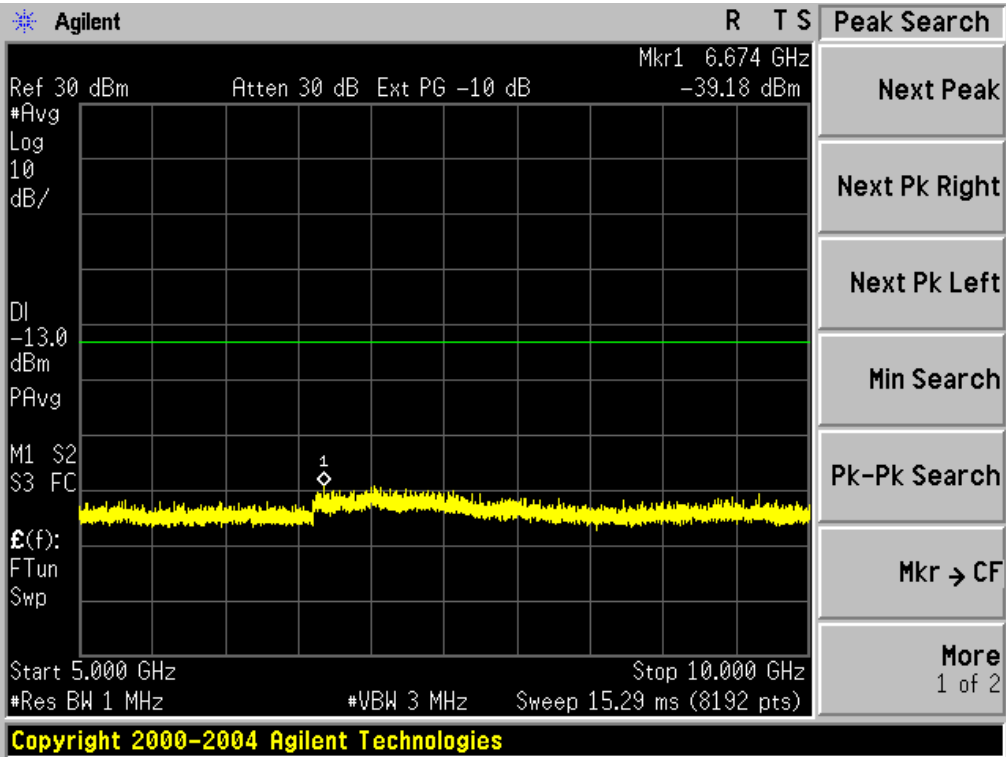


Conducted Emission Transmitting Mode CH 251 30MHz – 5GHz

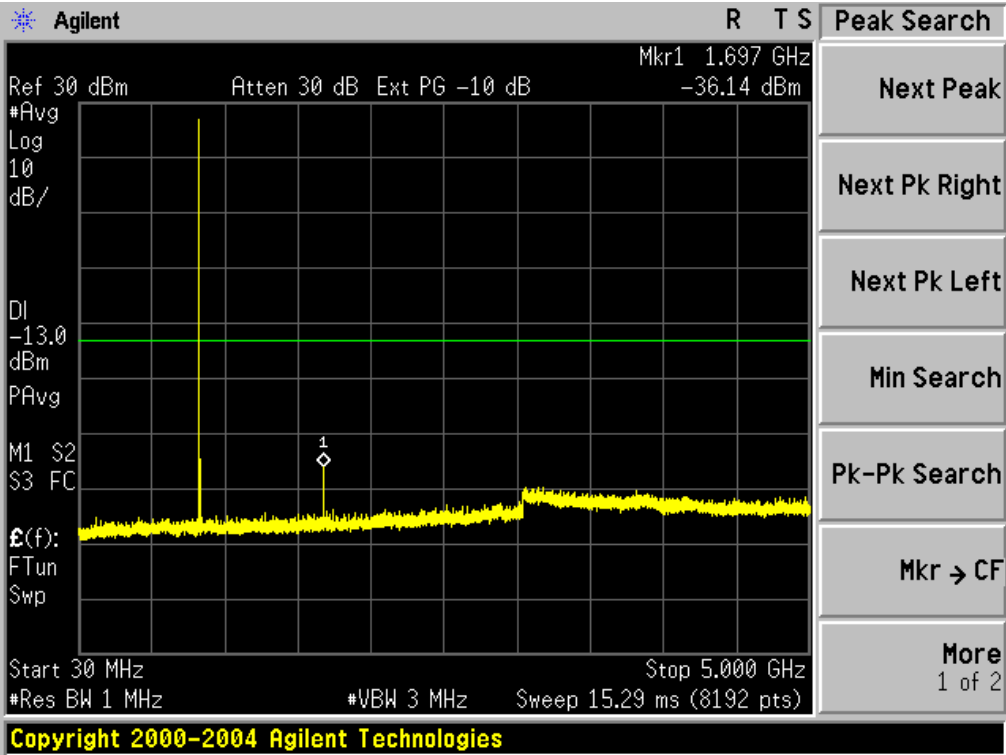


Conducted Emission Transmitting Mode CH 251 5GHz – 10GHz

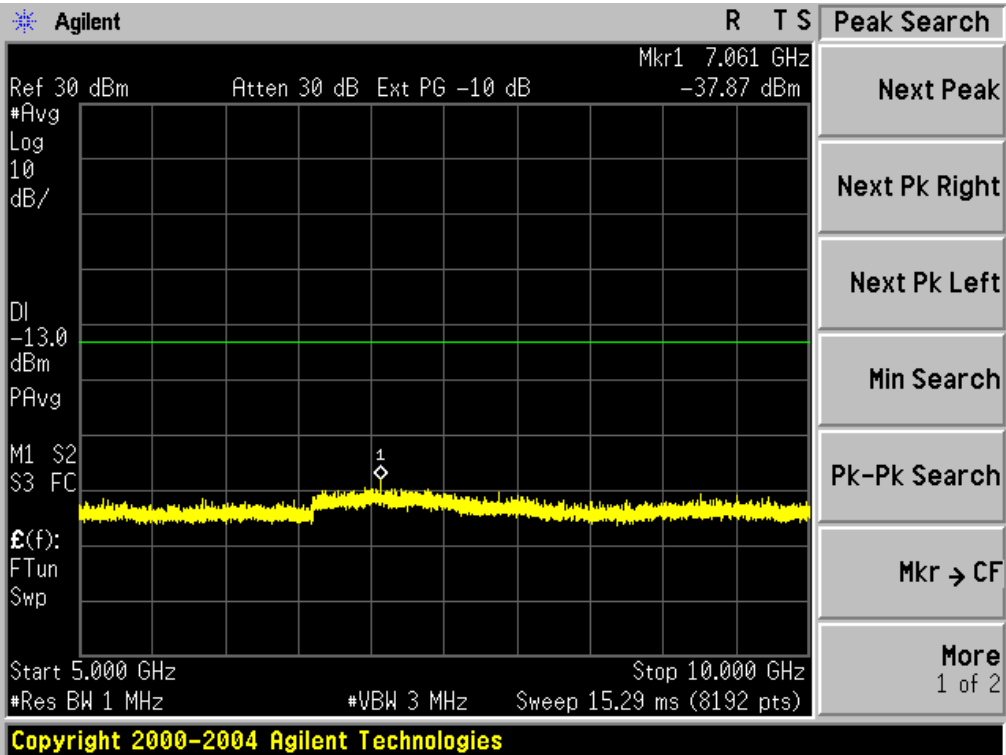


CONDUCTED EMISSION IN GPRS1900 BAND
Conducted Emission Transmitting Mode CH 512 30MHz – 10GHz

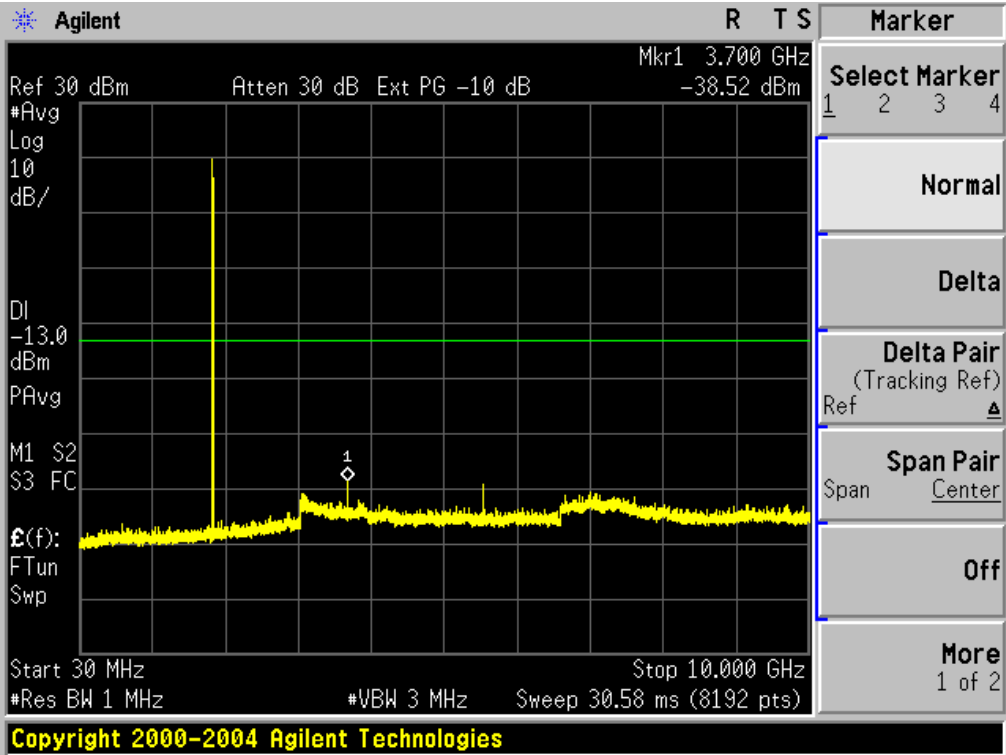


Conducted Emission Transmitting Mode CH 512 10GHz – 20GHz

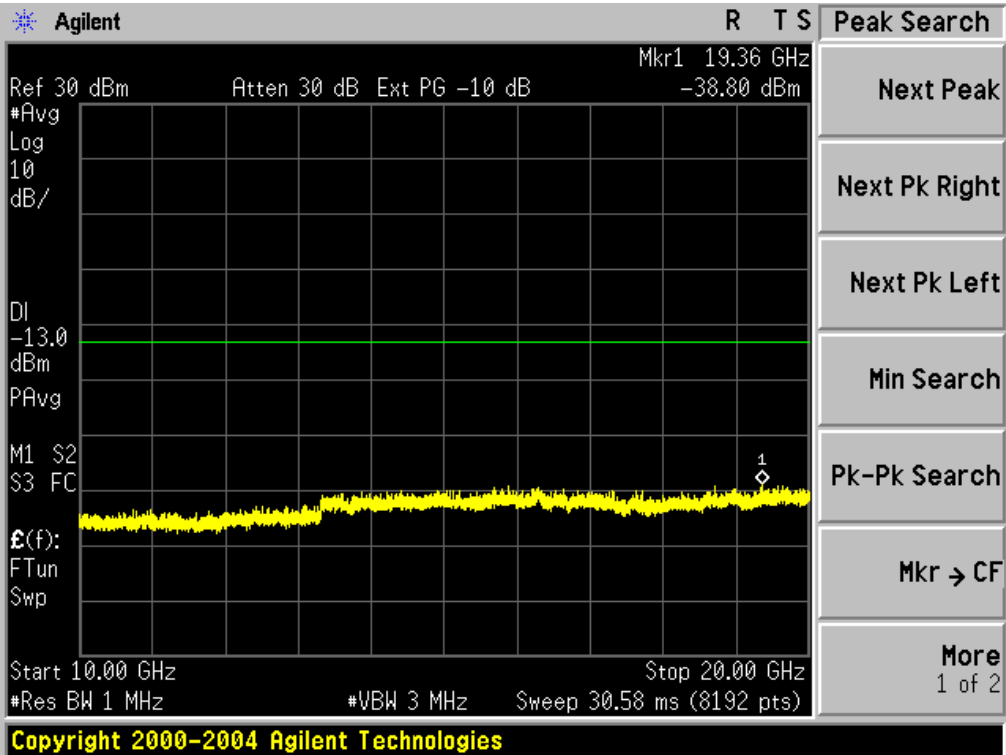


Conducted Emission Transmitting Mode CH 661 30MHz – 10GHz

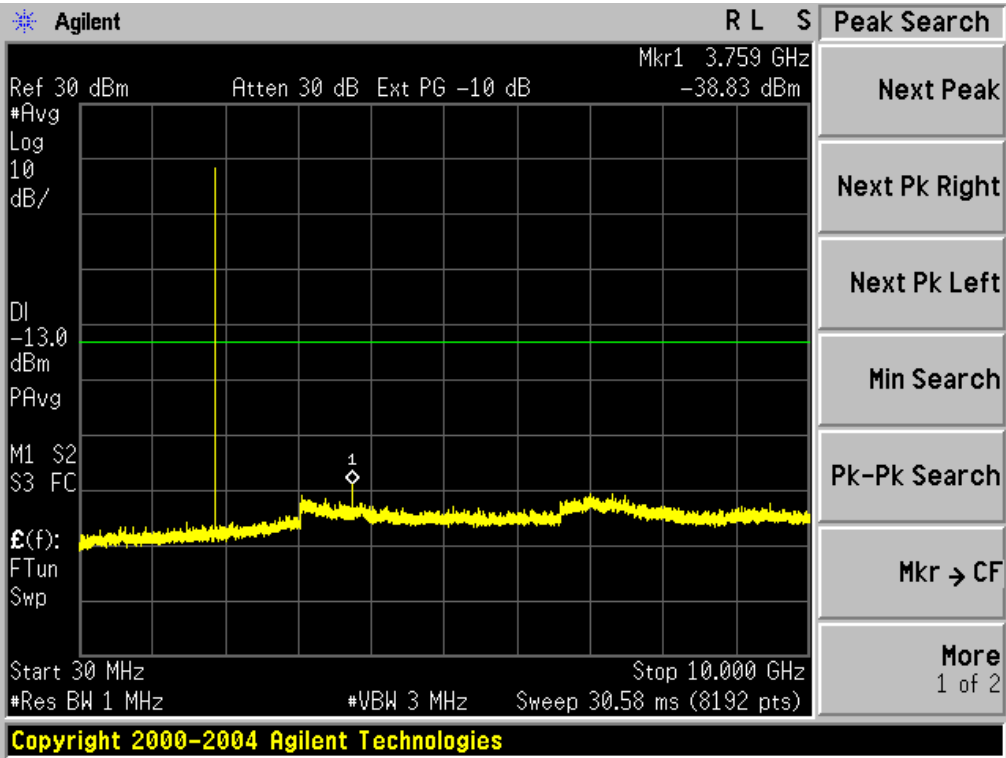


Conducted Emission Transmitting Mode CH 661 10GHz – 20GHz

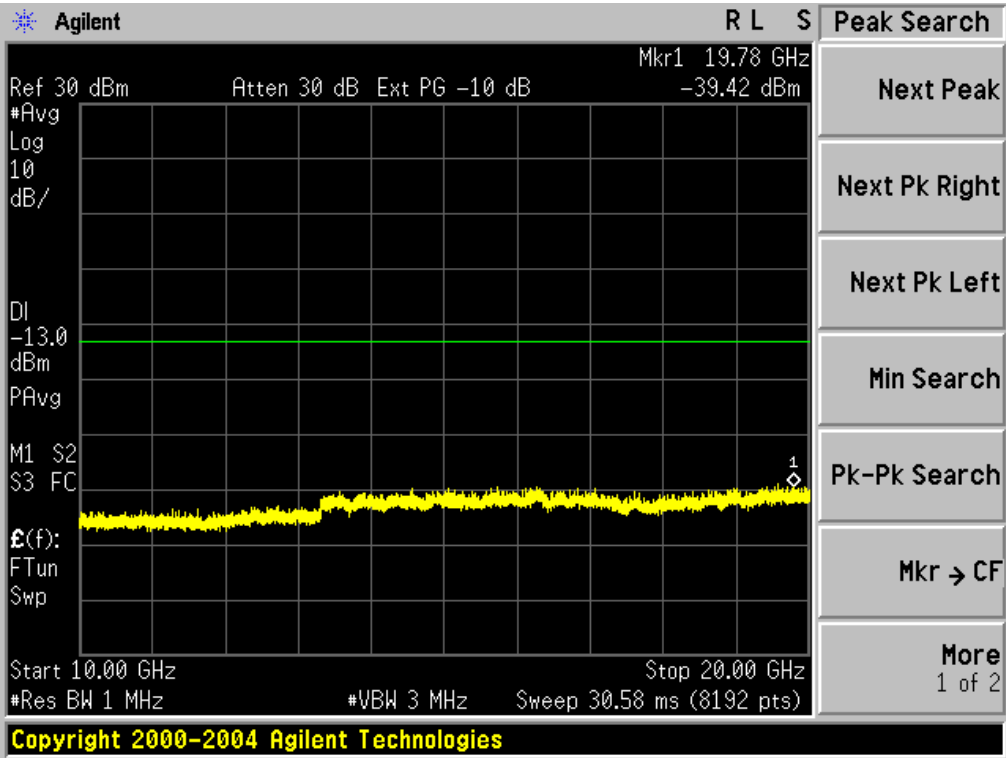


Conducted Emission Transmitting Mode CH 810 30MHz – 10GHz

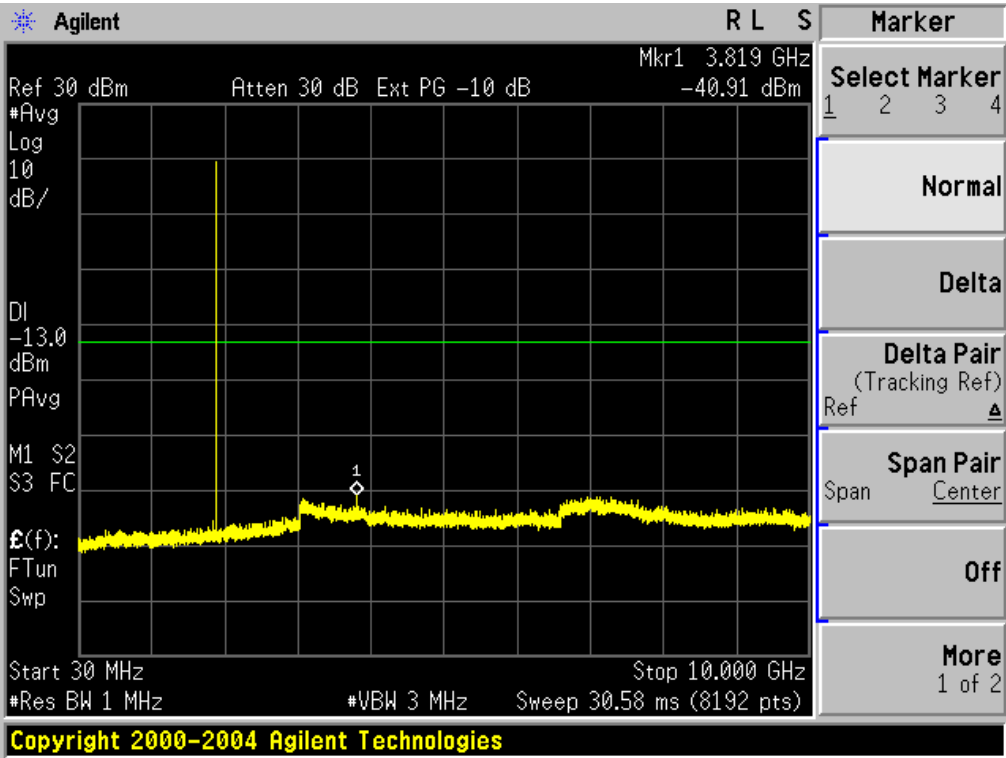


Conducted Emission Transmitting Mode CH 810 10GHz – 20GHz

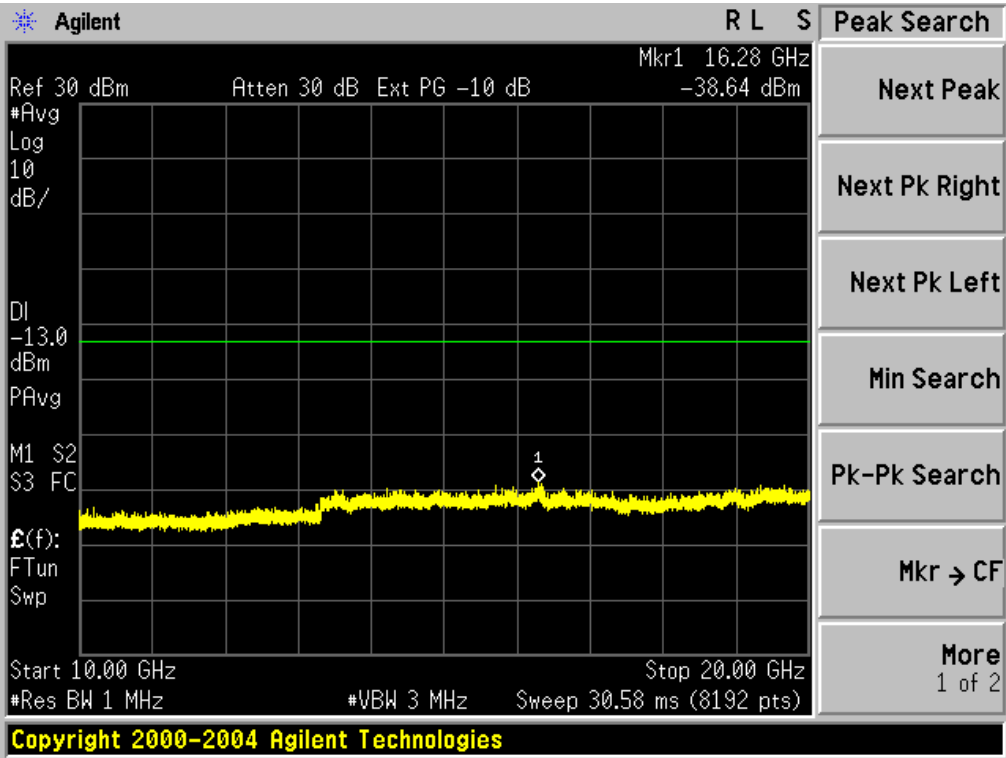


CONDUCTED EMISSION IN EGPRS 850 BAND
Conducted Emission Transmitting Mode CH 128 30MHz – 5GHz

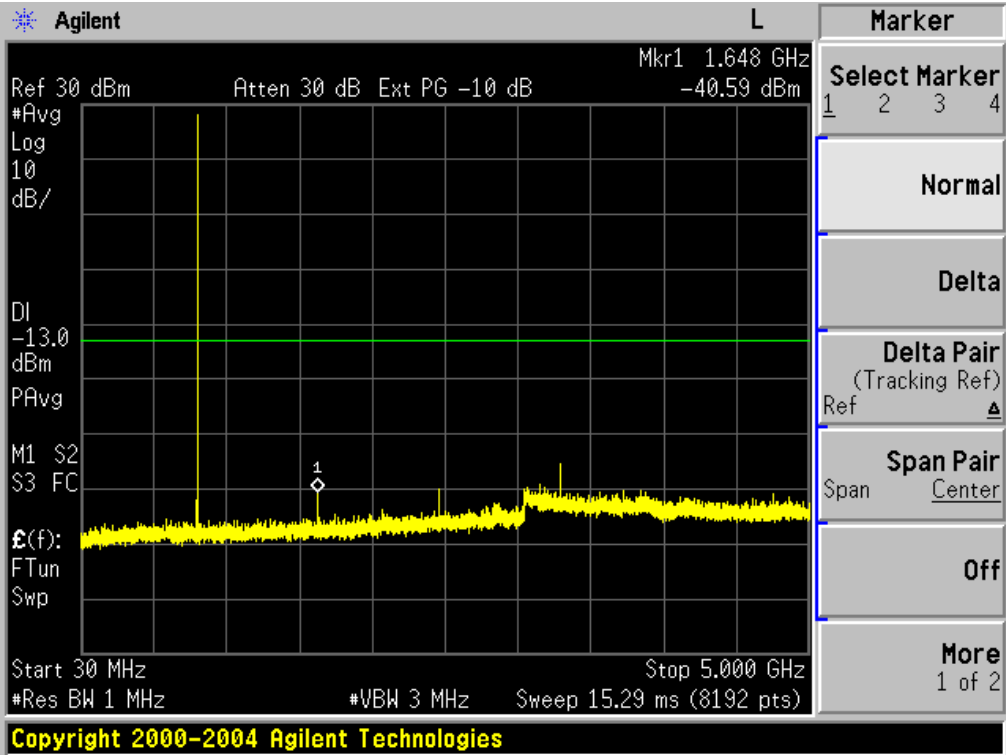


Conducted Emission Transmitting Mode CH 128 5GHz – 10GHz

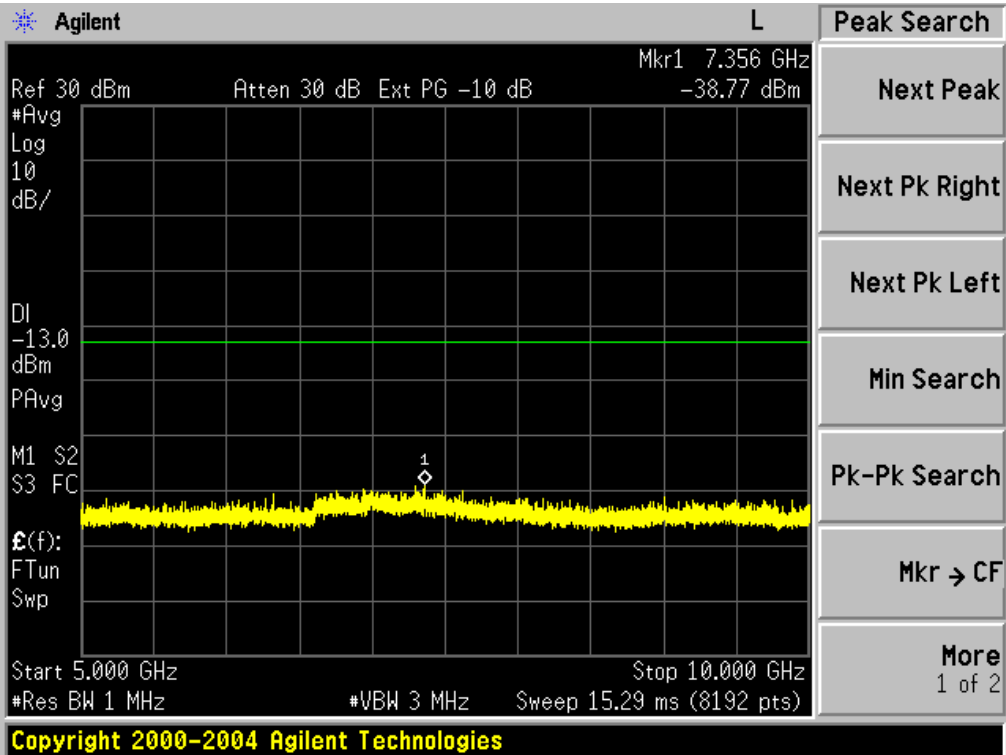


Conducted Emission Transmitting Mode CH 190 30MHz – 5GHz

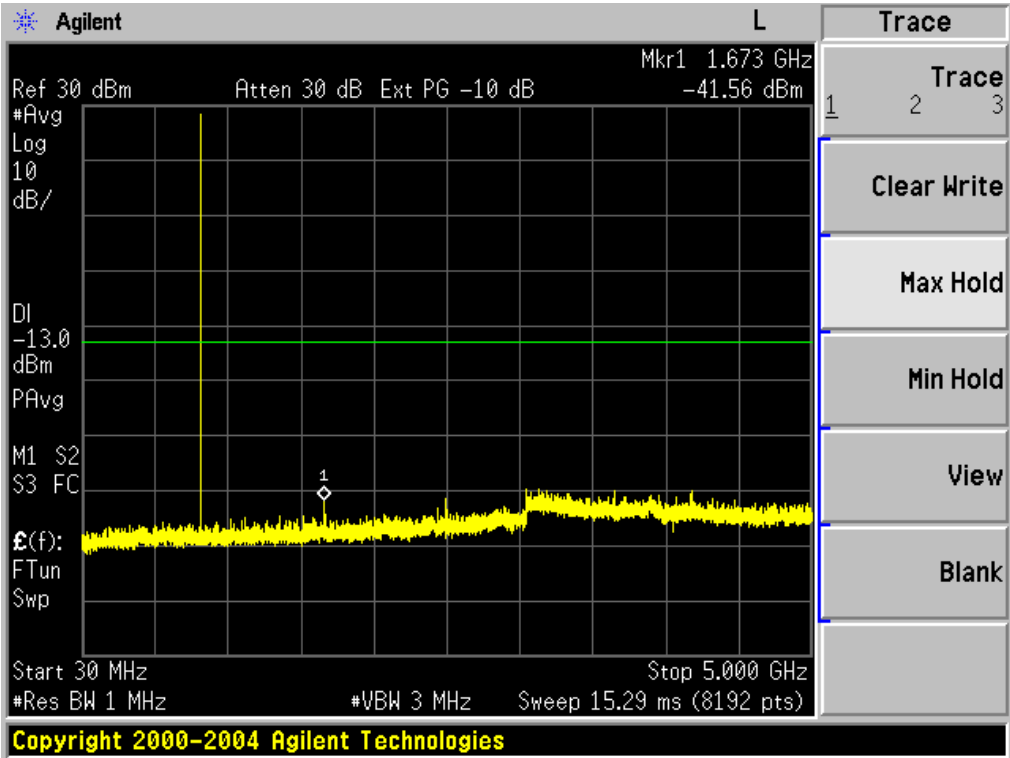


Conducted Emission Transmitting Mode CH 190 5GHz – 10GHz

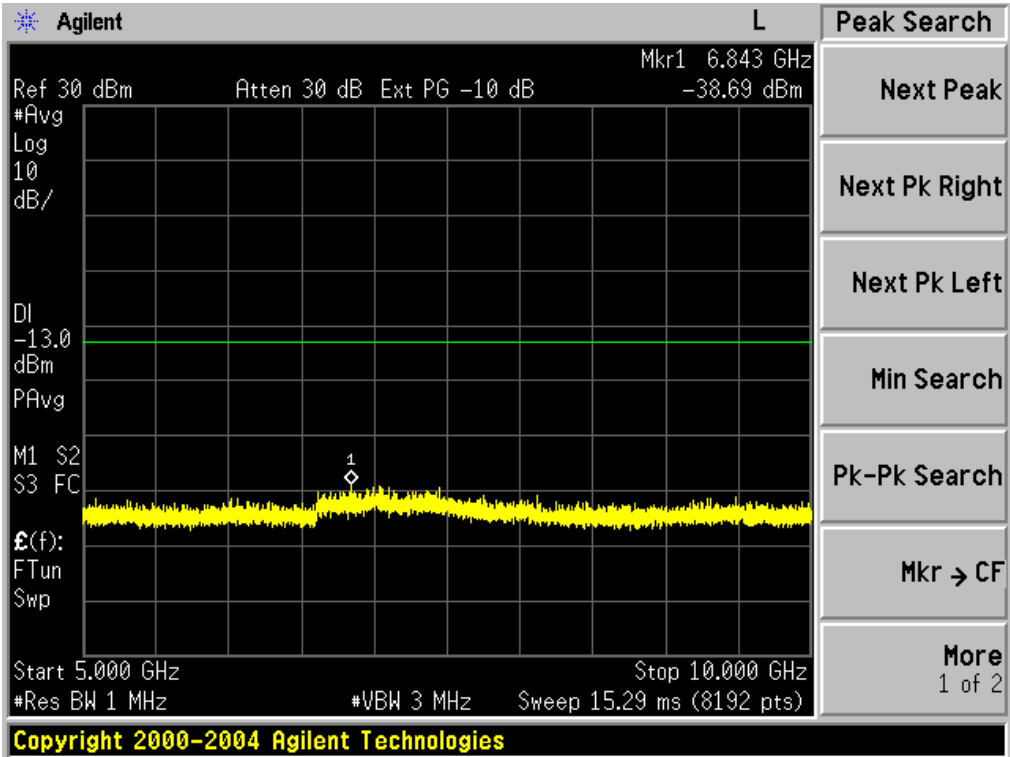


Conducted Emission Transmitting Mode CH 251 30MHz – 5GHz

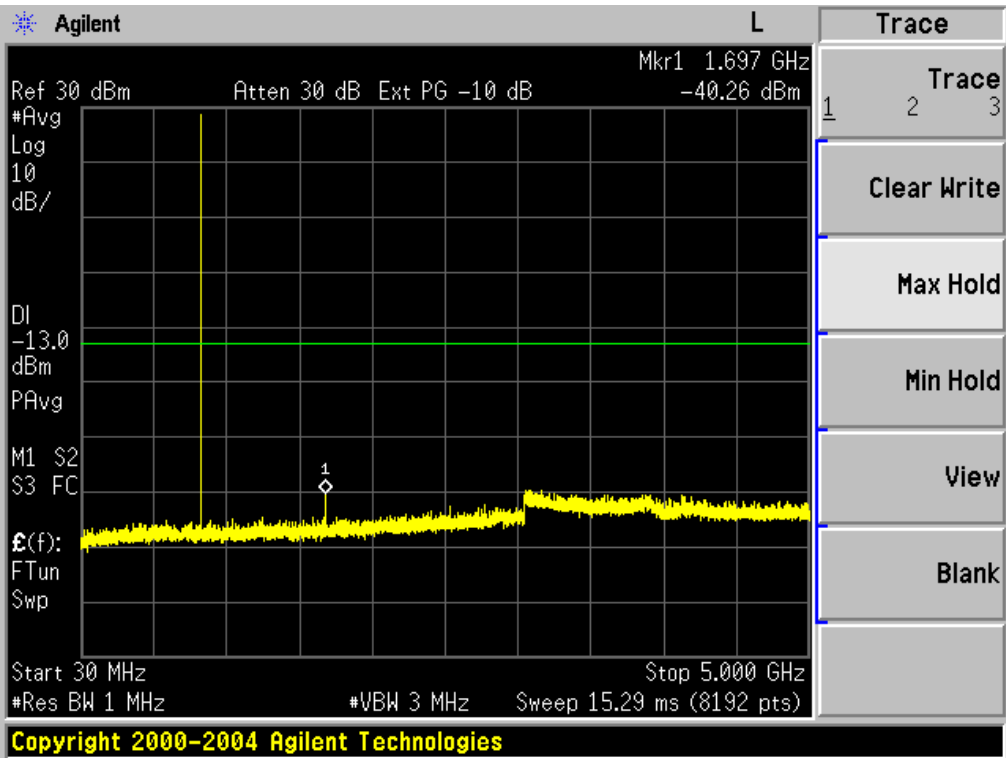


Conducted Emission Transmitting Mode CH 251 5GHz – 10GHz

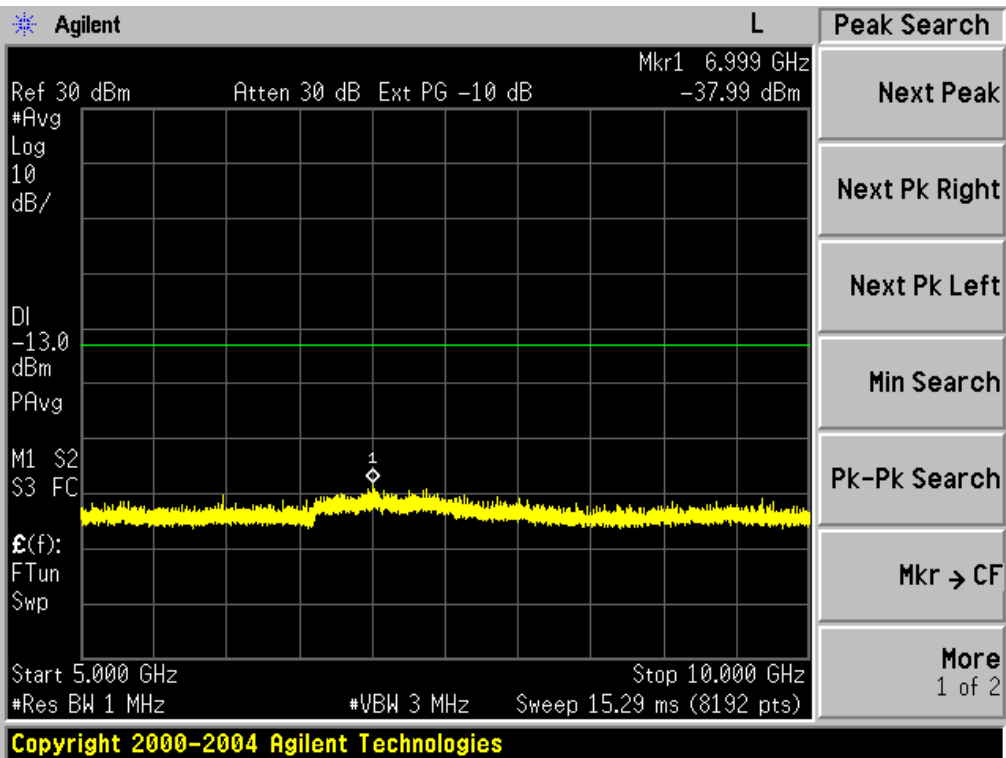


CONDUCTED EMISSION IN EGPRS1900 BAND
Conducted Emission Transmitting Mode CH 512 30MHz – 10GHz

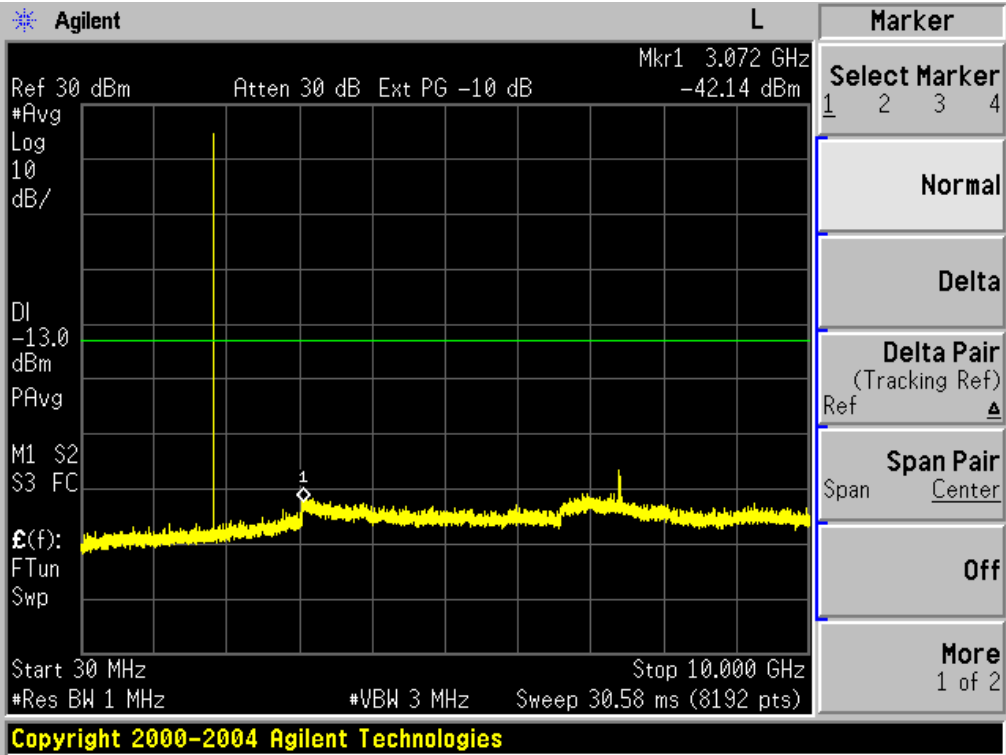


Conducted Emission Transmitting Mode CH 512 10GHz – 20GHz

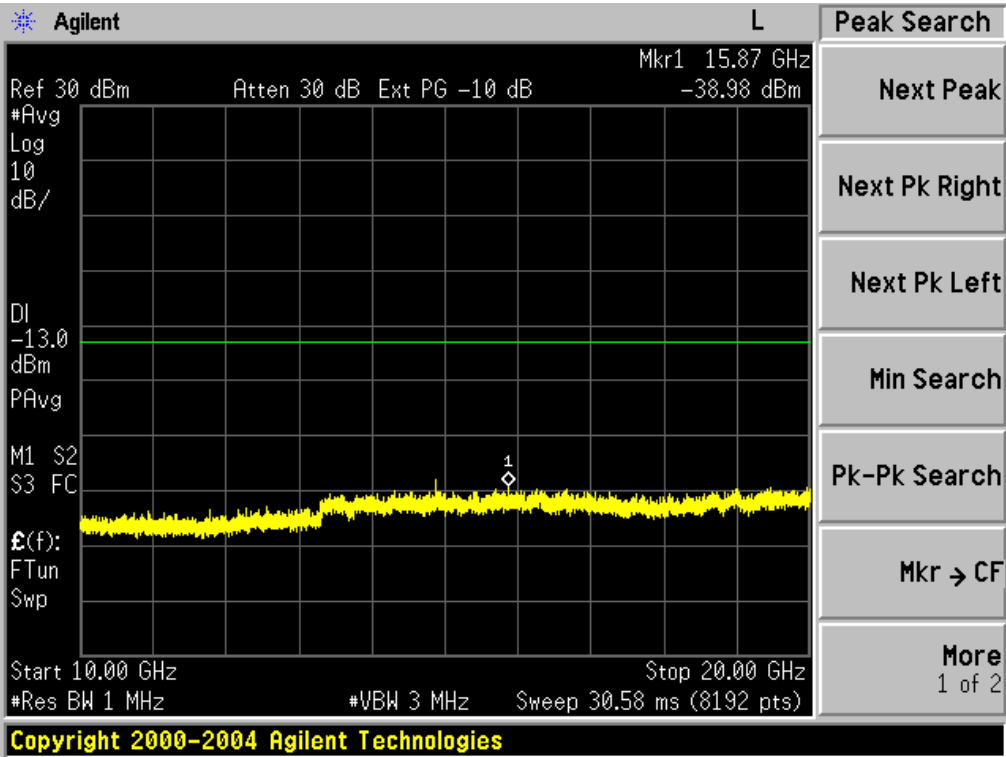


Conducted Emission Transmitting Mode CH 661 30MHz – 10GHz

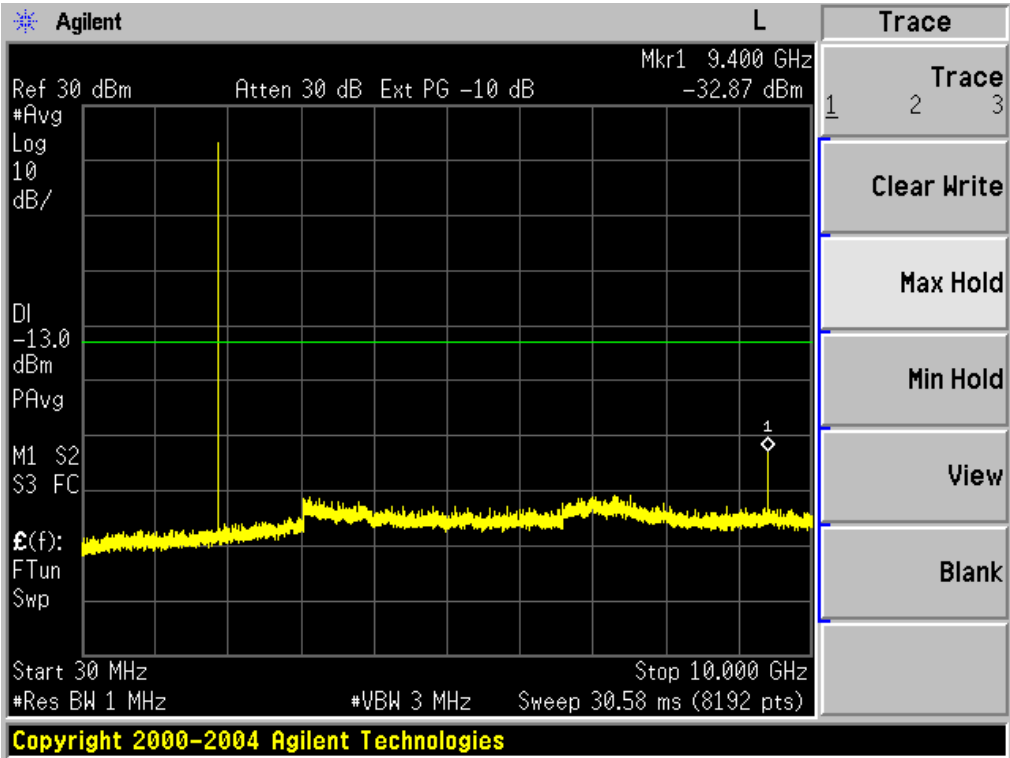


Conducted Emission Transmitting Mode CH 661 10GHz – 20GHz

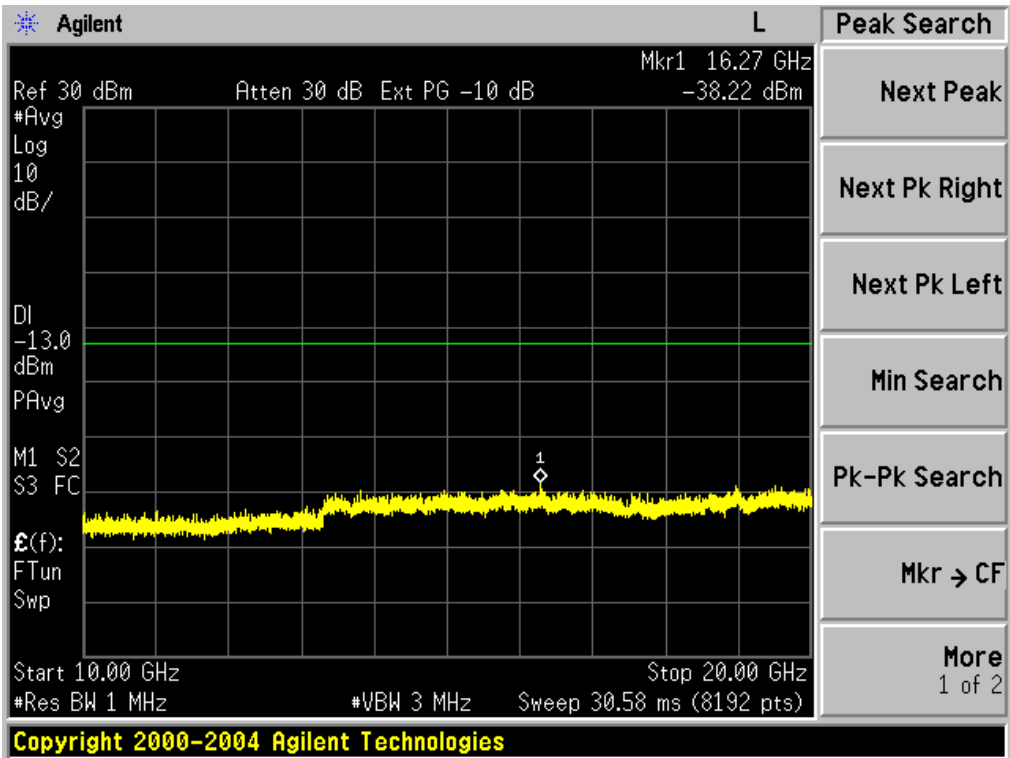


Conducted Emission Transmitting Mode CH 810 30MHz – 10GHz

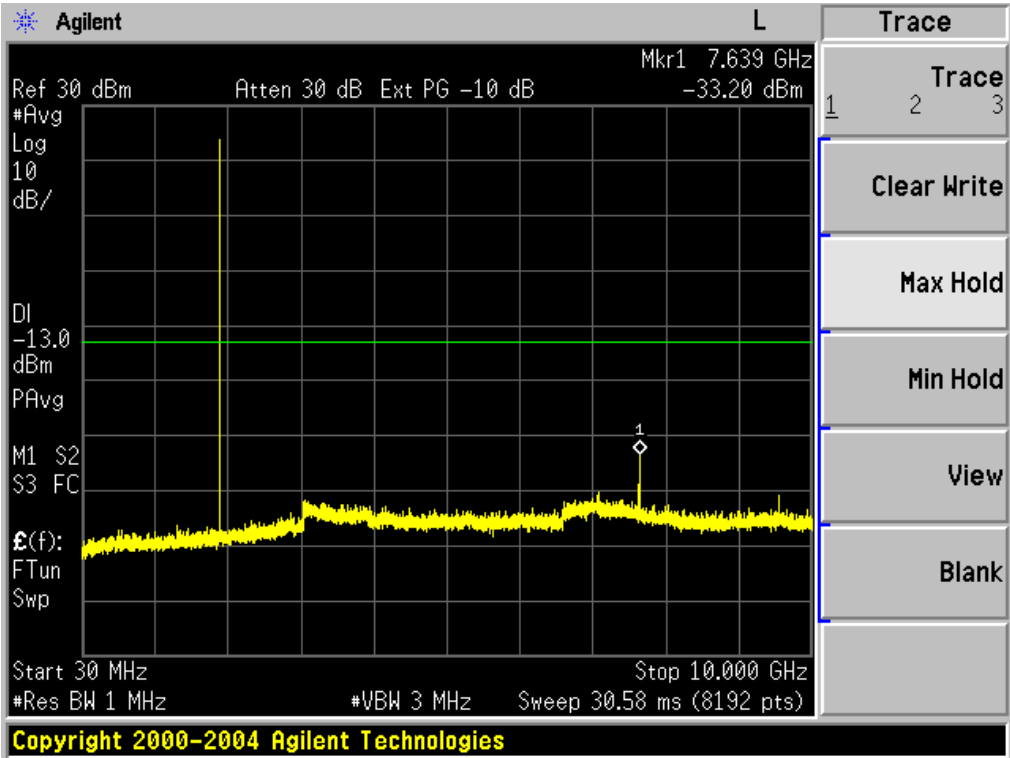


Conducted Emission Transmitting Mode CH 810 10GHz – 20GHz

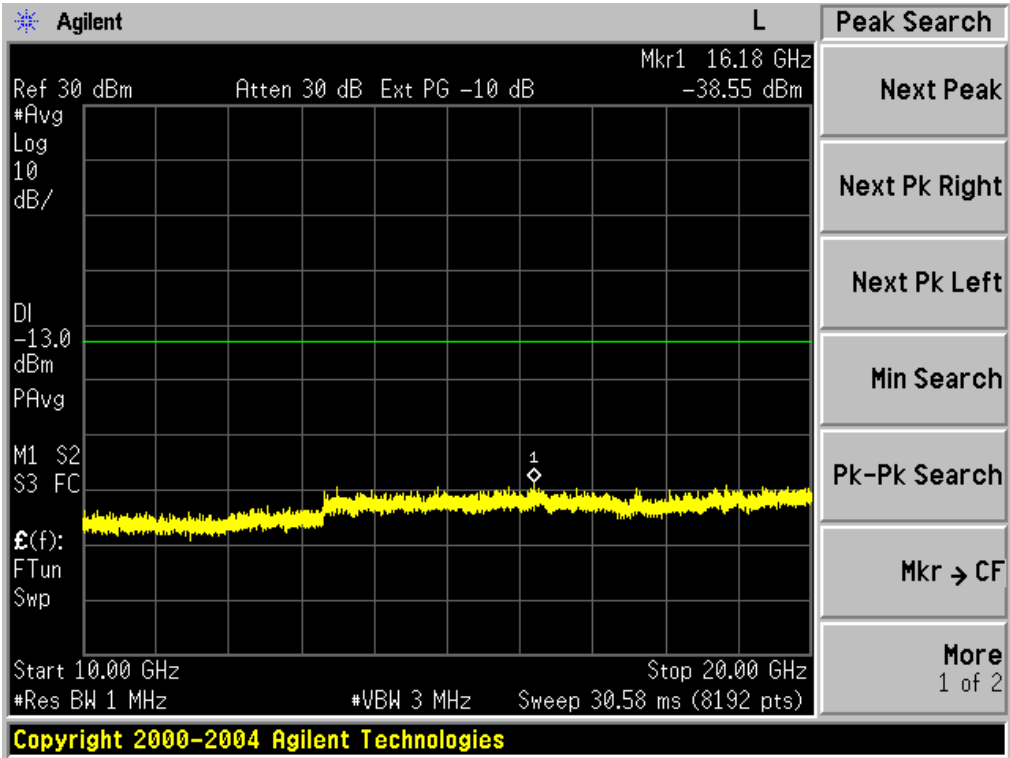


CONDUCTED EMISSION IN UMTS band II
Conducted Emission Transmitting Mode CH 9262 30MHz – 10GHz

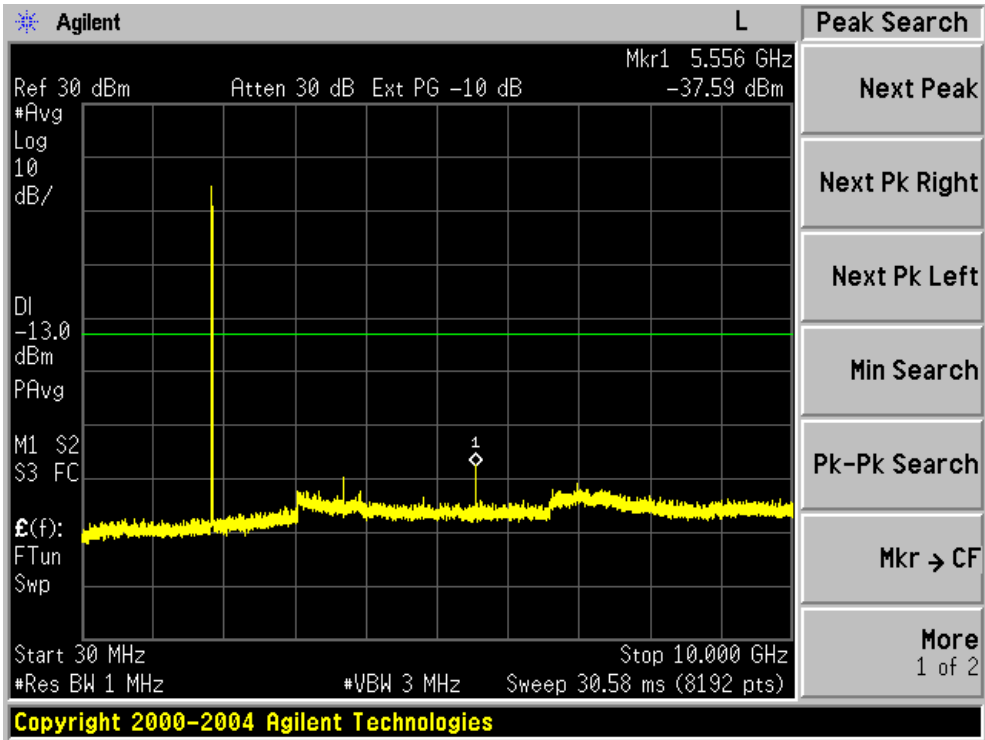


Conducted Emission Transmitting Mode CH 9262 10GHz – 20GHz

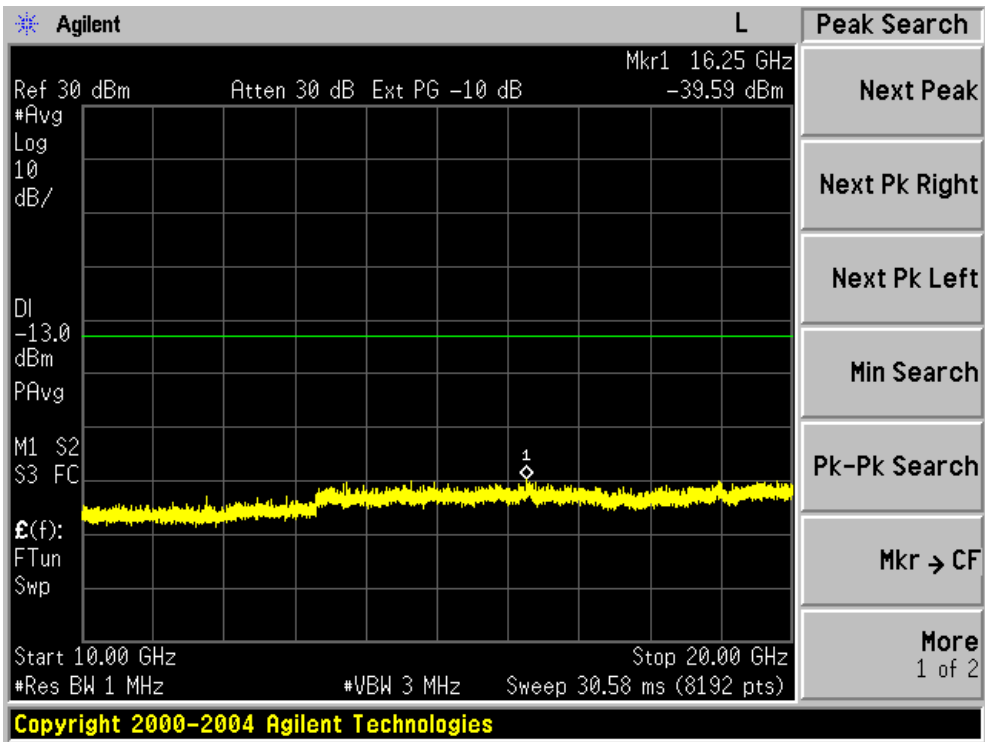


Conducted Emission Transmitting Mode CH 9400 30MHz – 10GHz

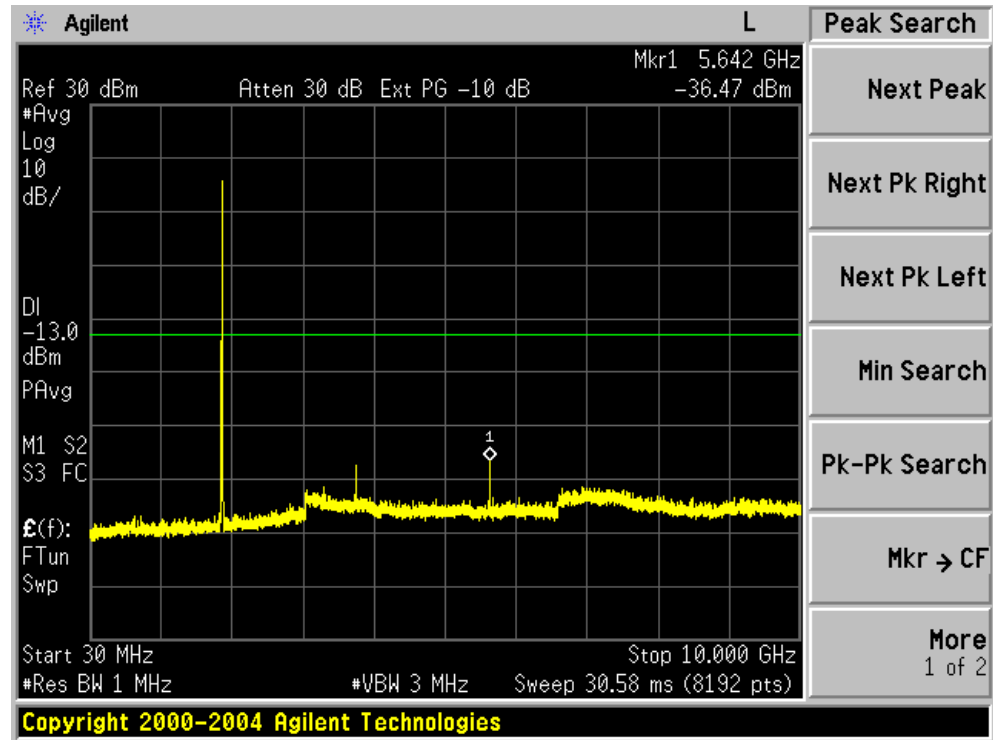


Conducted Emission Transmitting Mode CH 9400 10GHz – 20GHz

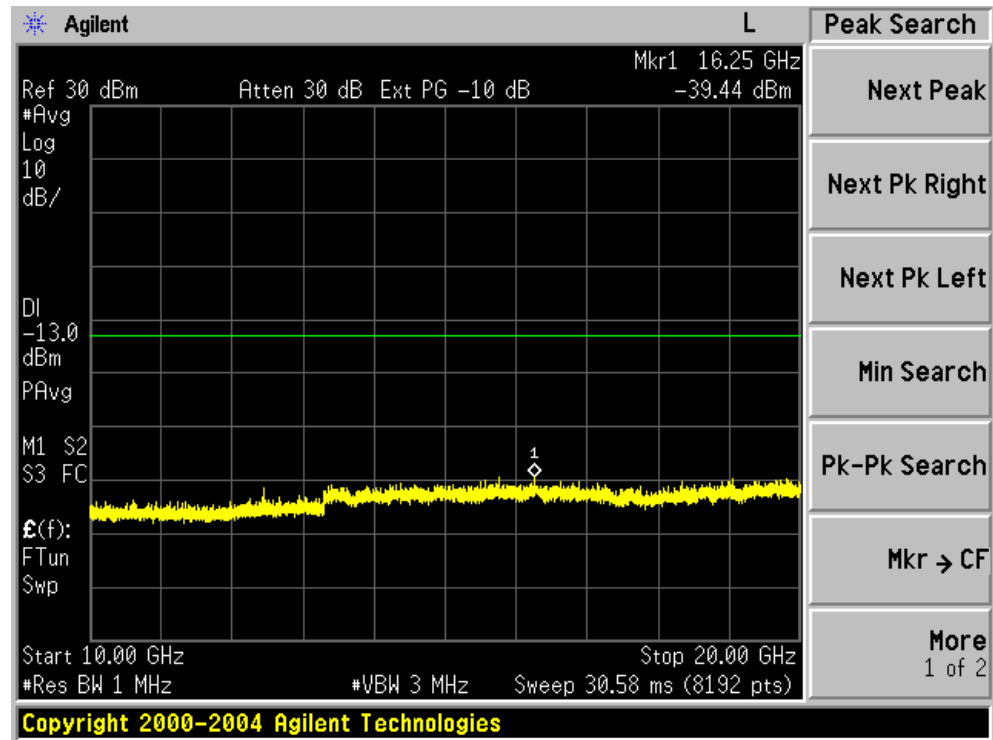


Conducted Emission Transmitting Mode CH 9538 30MHz – 10GHz

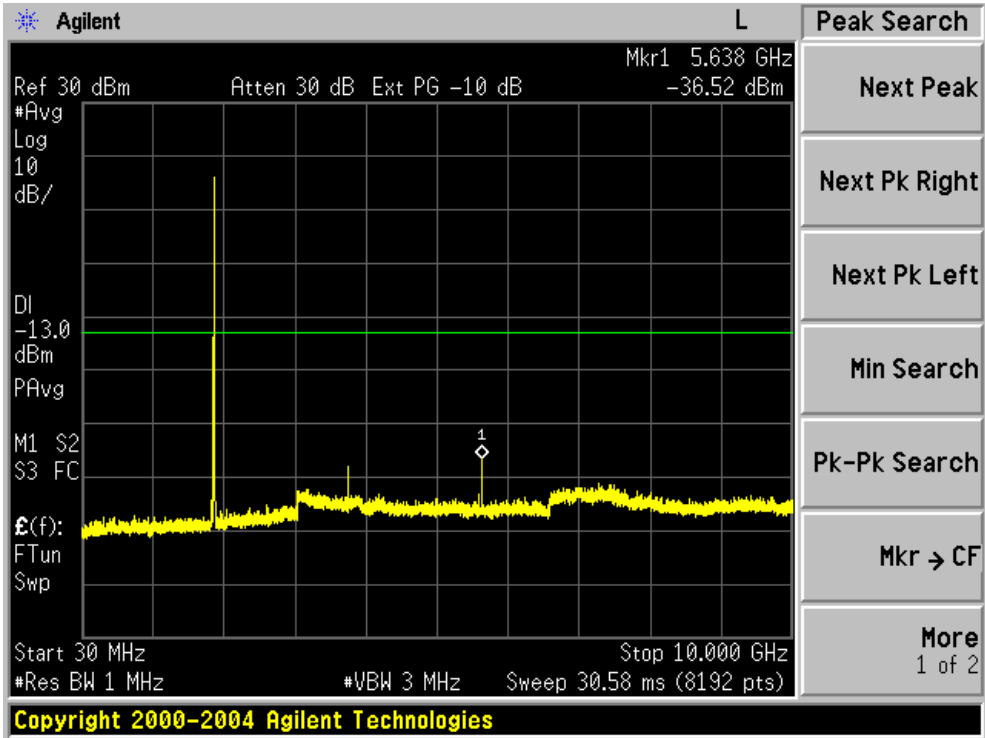


Conducted Emission Transmitting Mode CH 9538 10GHz – 20GHz

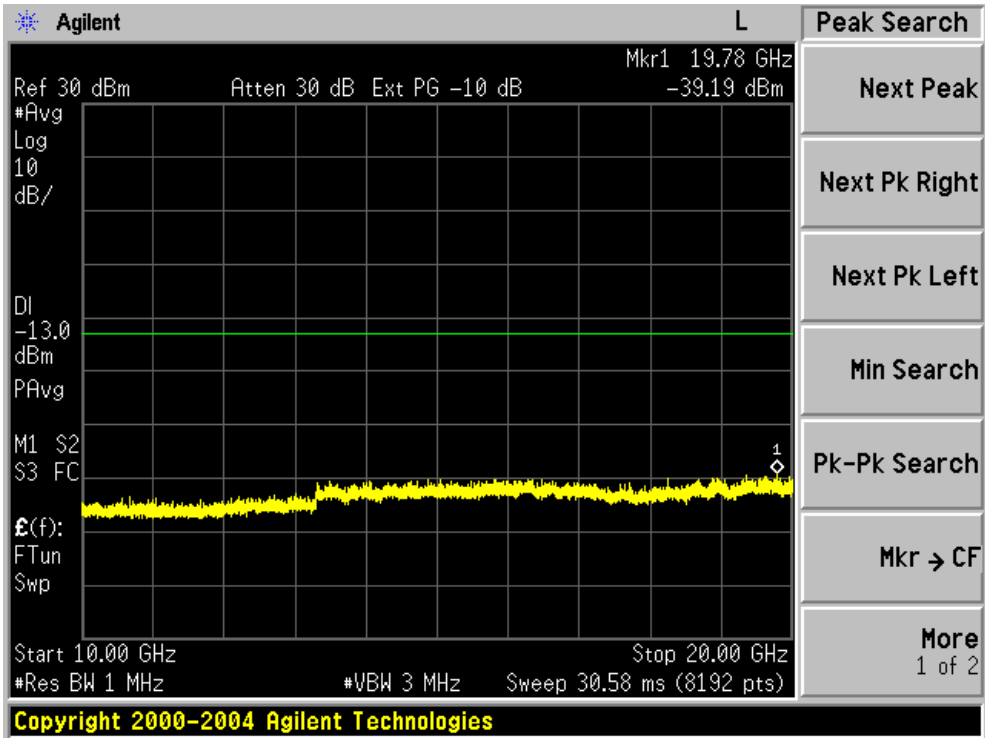


CONDUCTED EMISSION IN UMTS band V
Conducted Emission Transmitting Mode CH 4132 30MHz – 10GHz

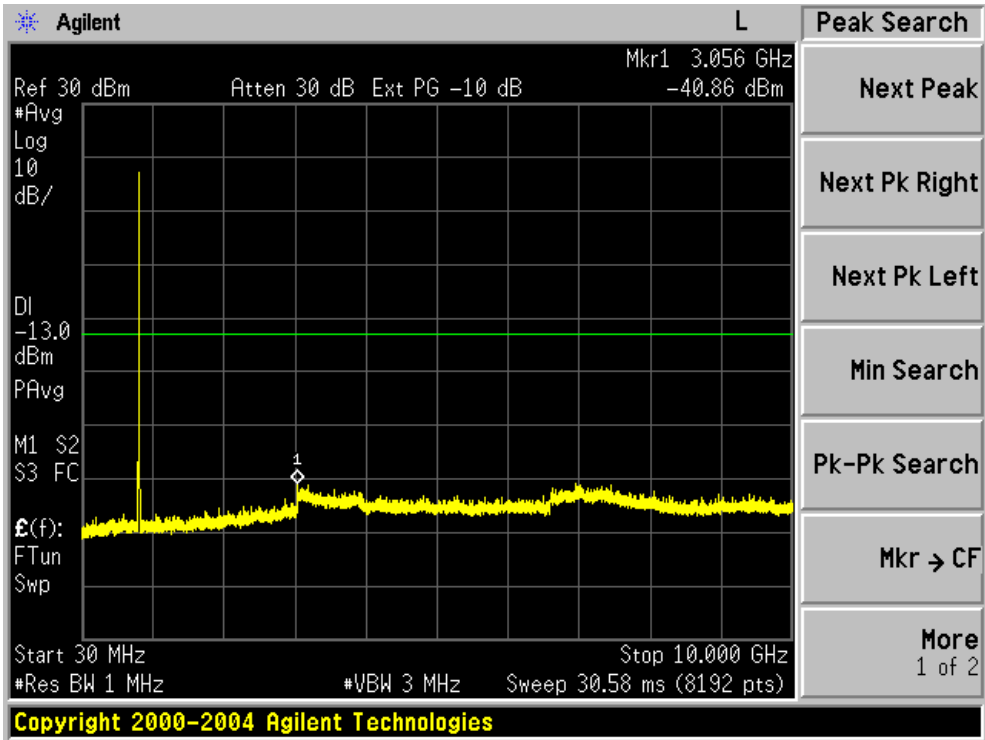


Conducted Emission Transmitting Mode CH 4132 10GHz – 20GHz

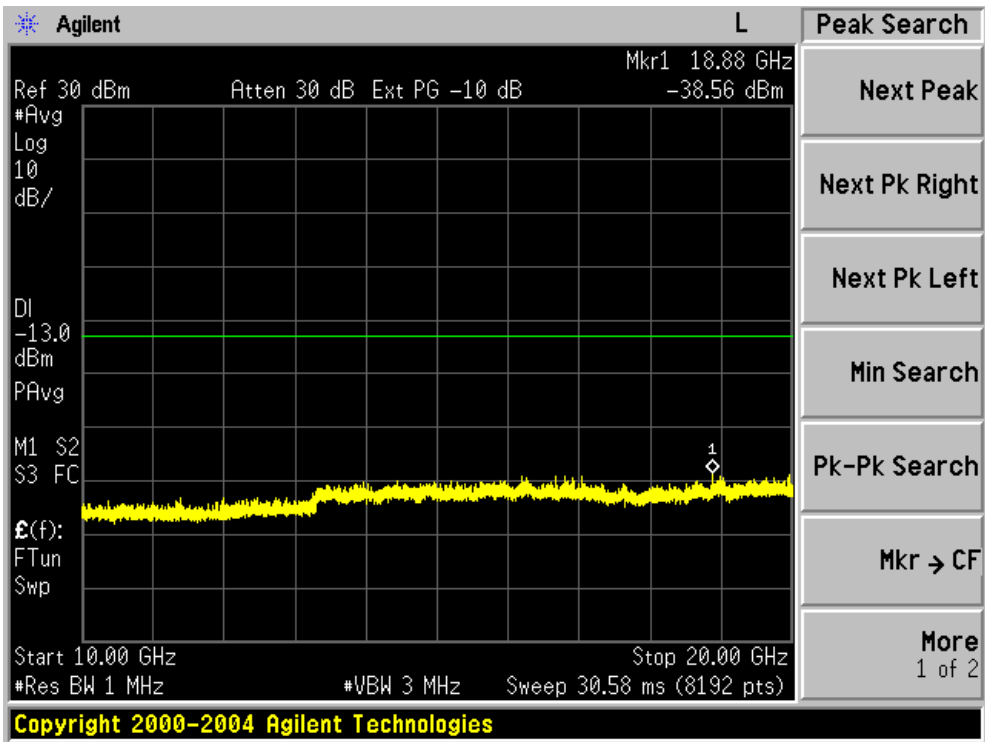


Conducted Emission Transmitting Mode CH 4183 30MHz –10GHz

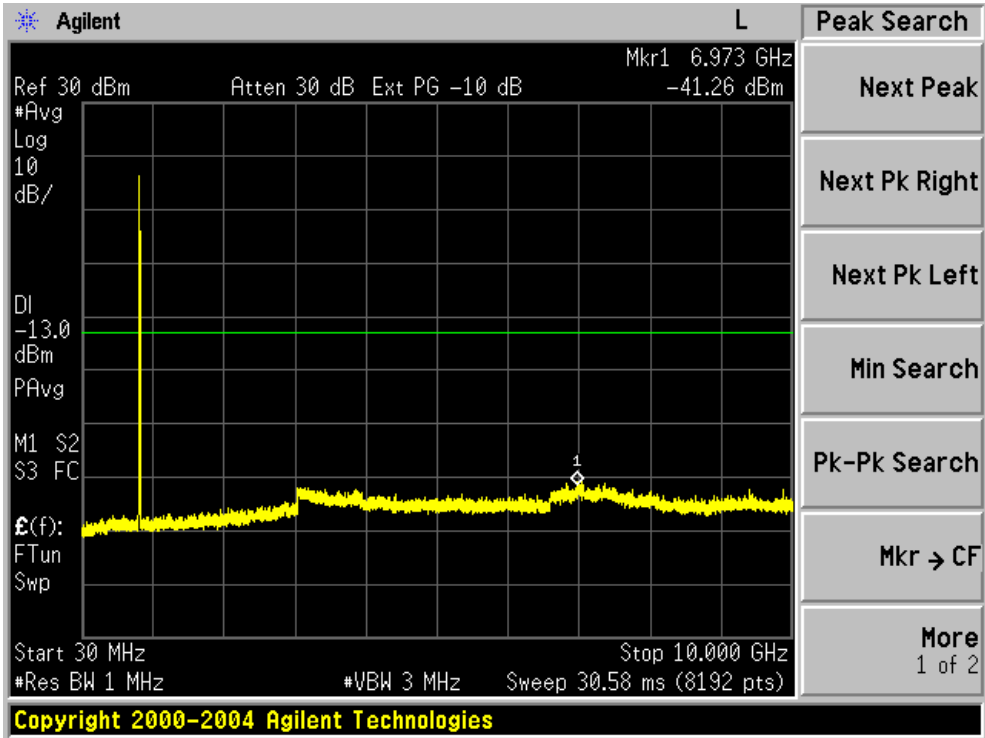


Conducted Emission Transmitting Mode CH 4183 10GHz – 20GHz

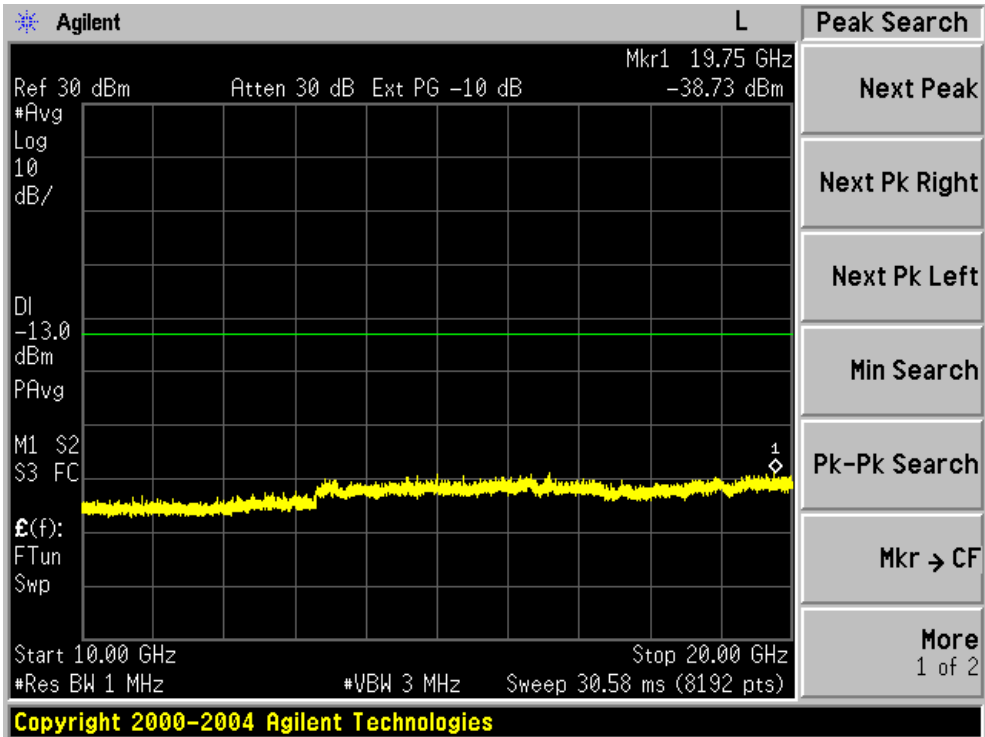

Conducted Emission Transmitting Mode CH 4233 30MHz – 10GHz

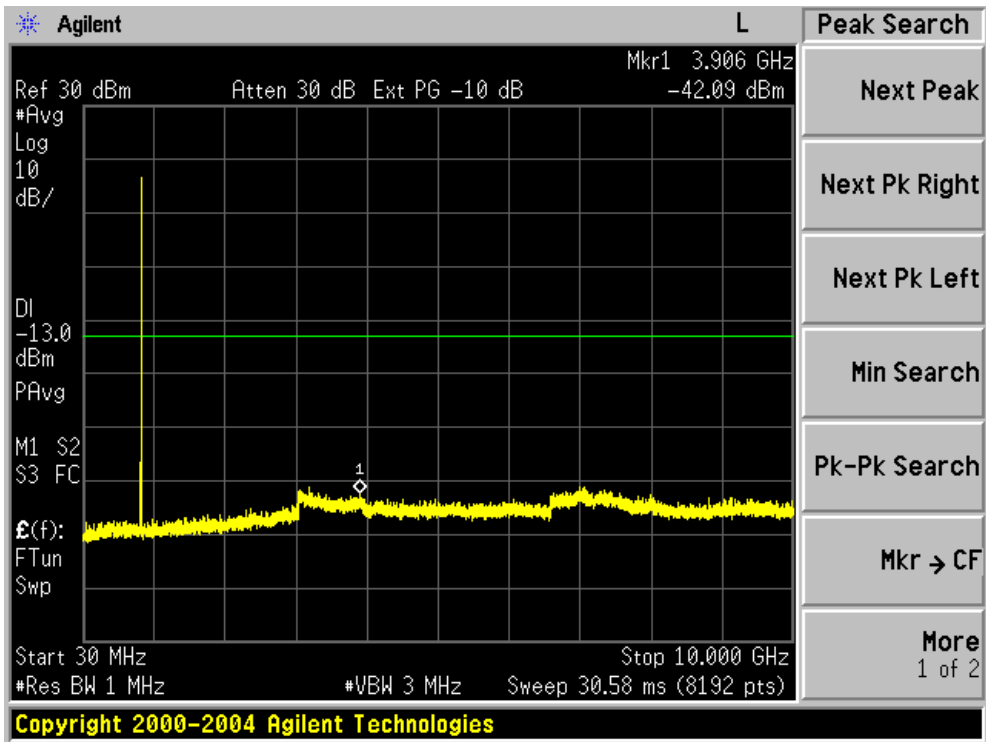

Conducted Emission Transmitting Mode CH 4233 10GHz – 20GHz

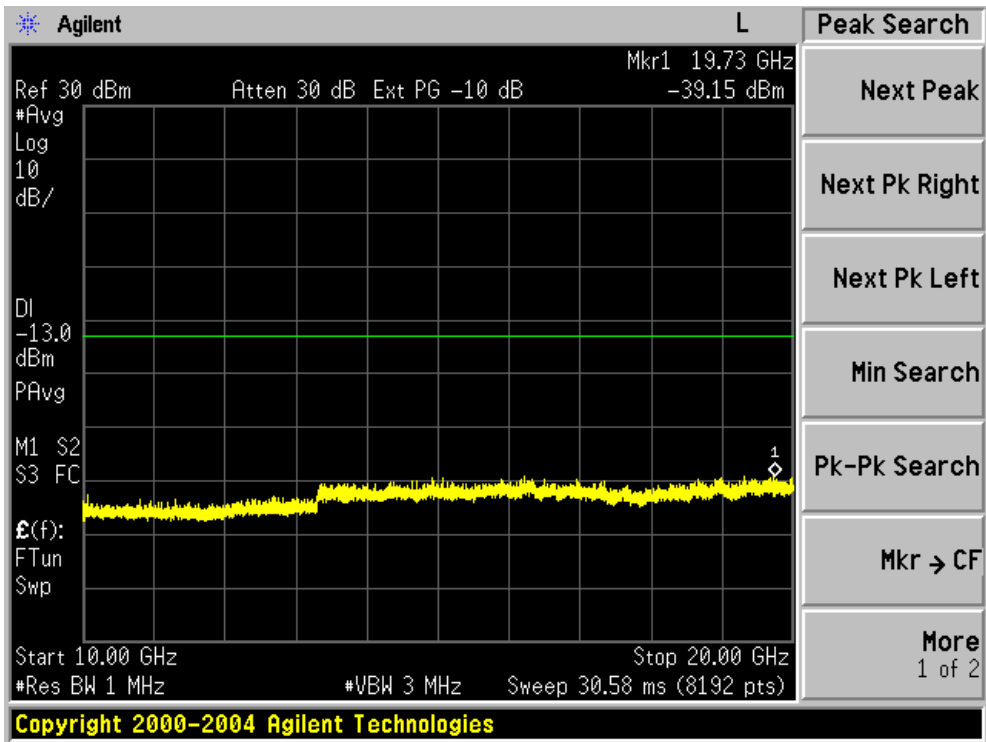


APPENDIX II


TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)

EMISSION BANDWIDTH (-26dBC)


Occupied Bandwidth (99%) GSM 850 BAND CH 128

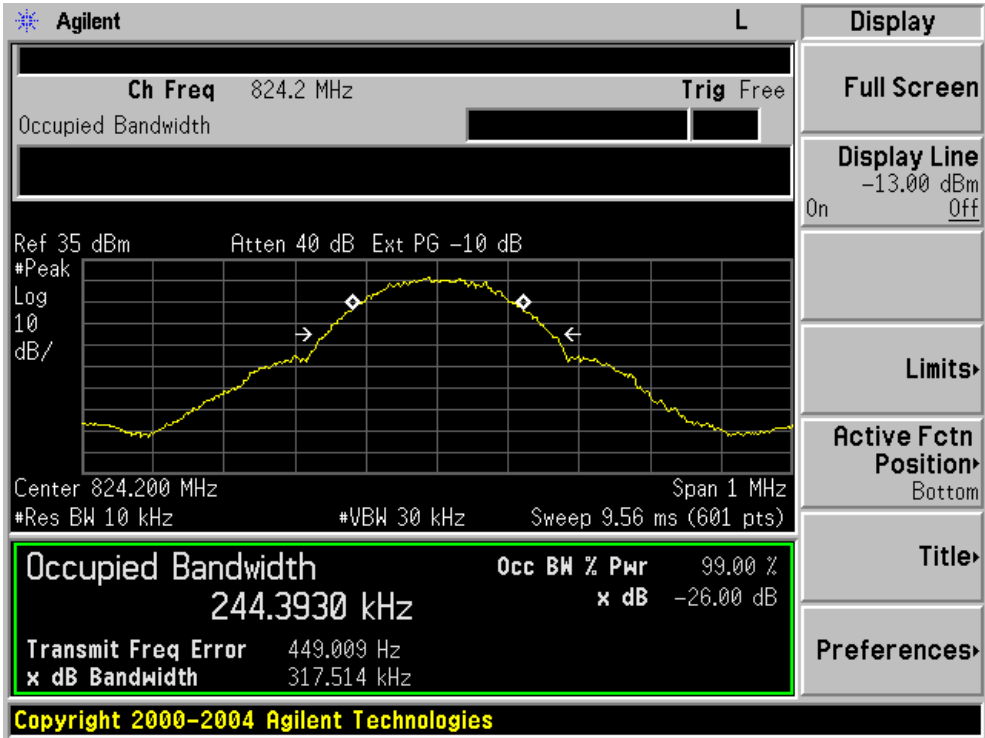


Occupied Bandwidth (99%) GSM 850 BAND CH 190

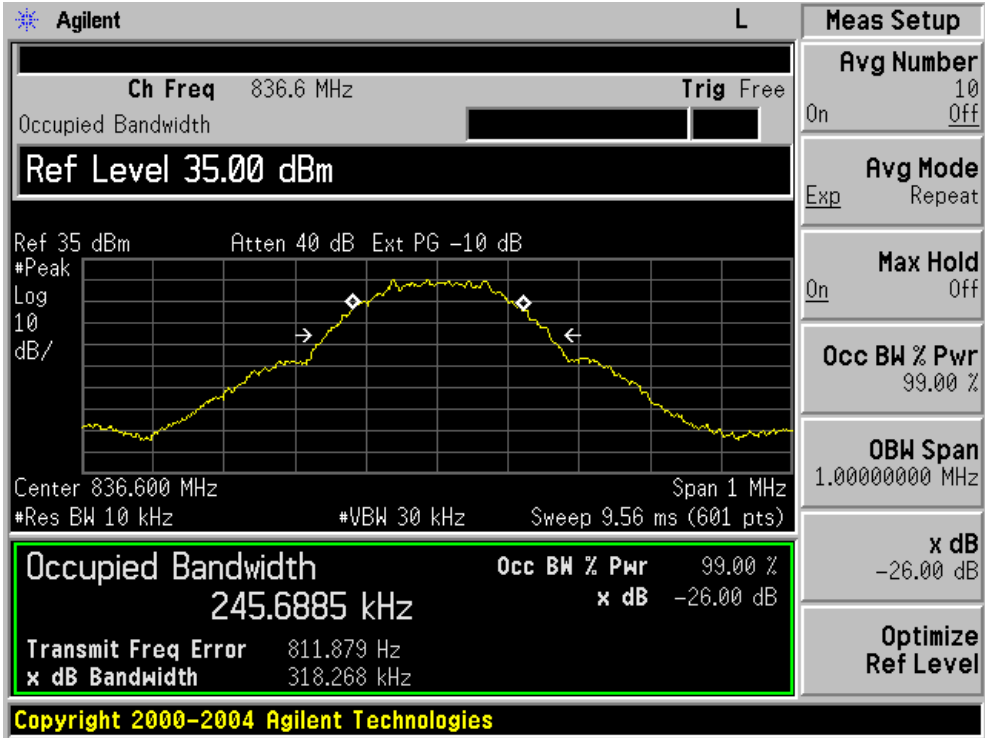


Occupied Bandwidth (99%) GSM 850 BAND CH 251

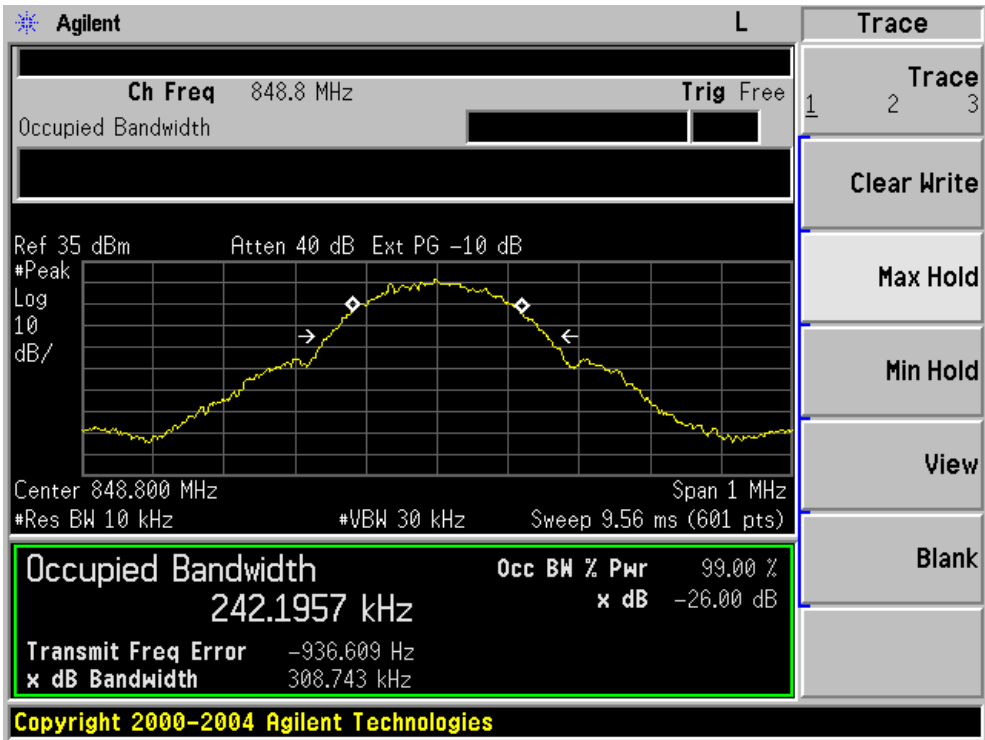


Occupied Bandwidth (99%) PCS 1900 BAND CH 512

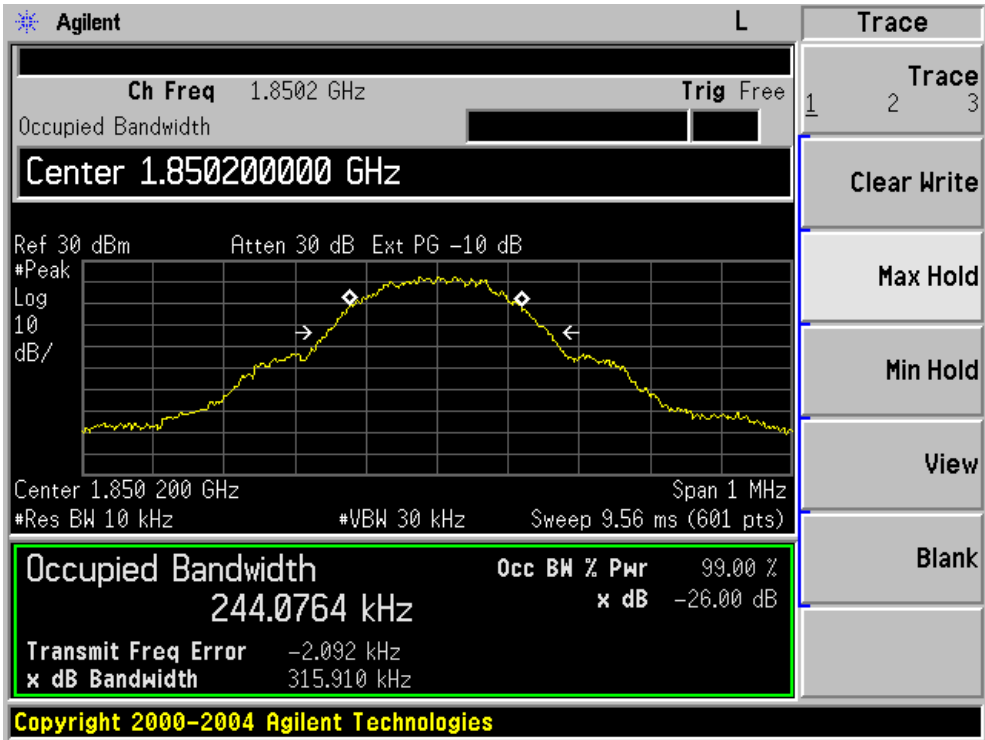


Occupied Bandwidth (99%) PCS 1900 BAND CH 661

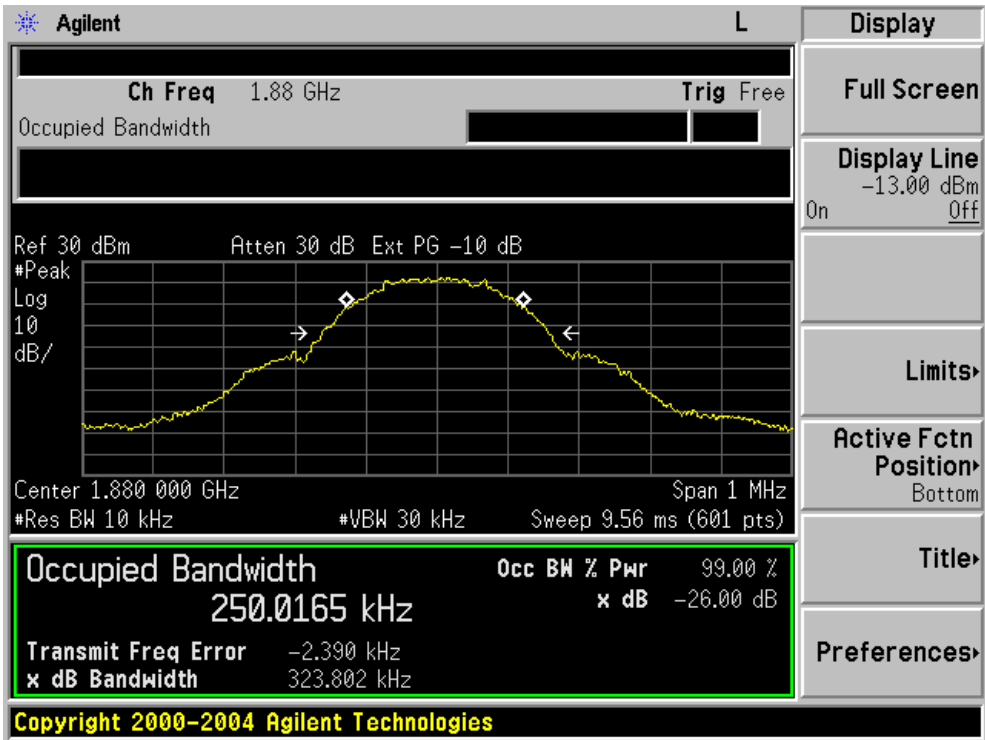


Occupied Bandwidth (99%) PCS 1900 BAND CH 810

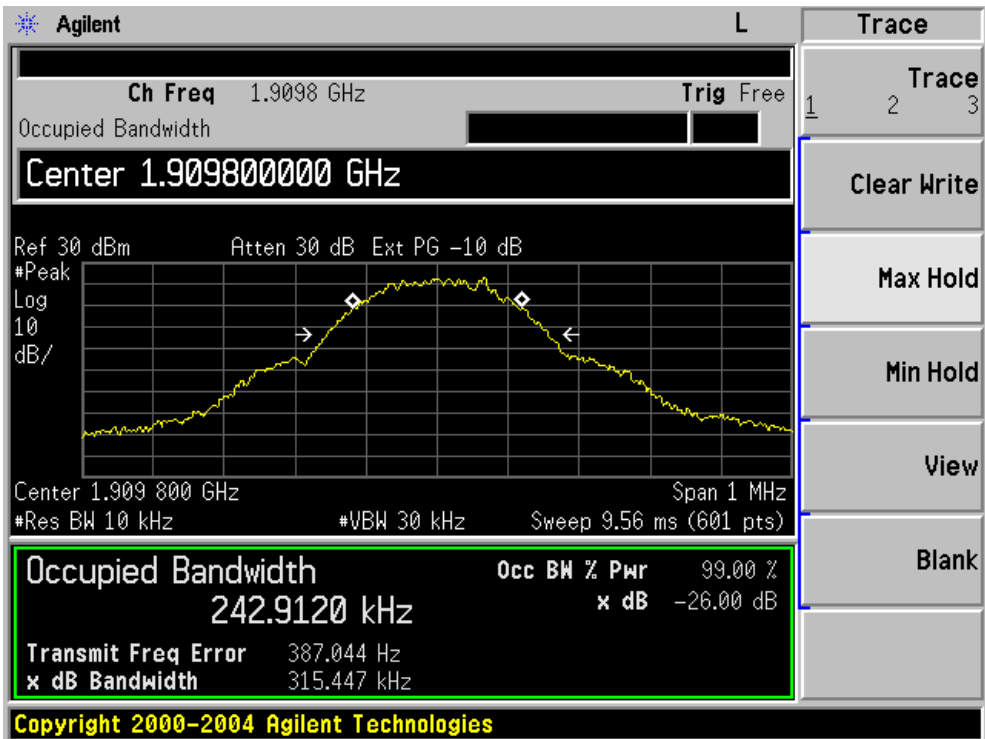


Occupied Bandwidth (99%) GPRS 850 BAND CH 128

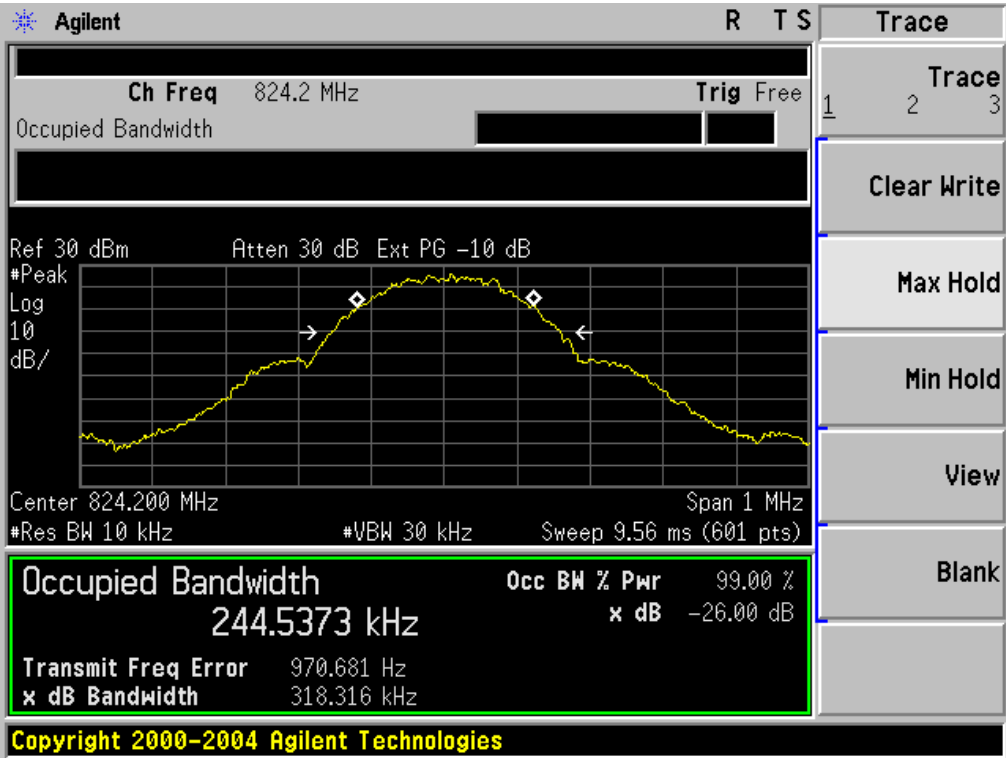


Occupied Bandwidth (99%) GPRS 850 BAND CH 190

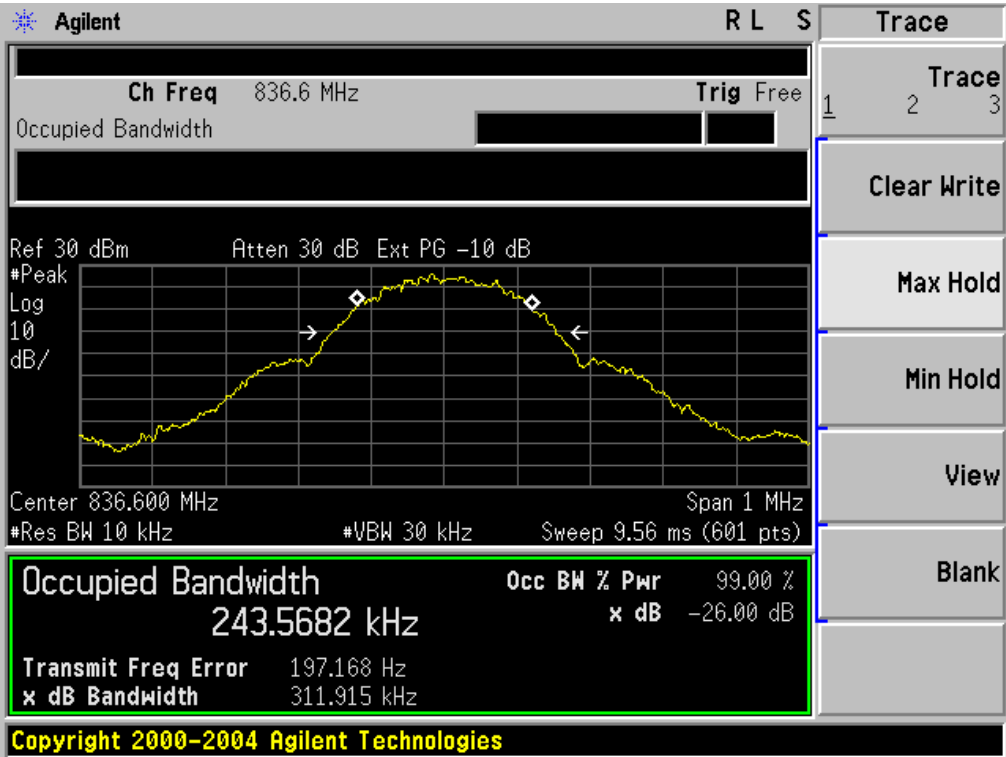


Occupied Bandwidth (99%) GPRS 850 BAND CH 251

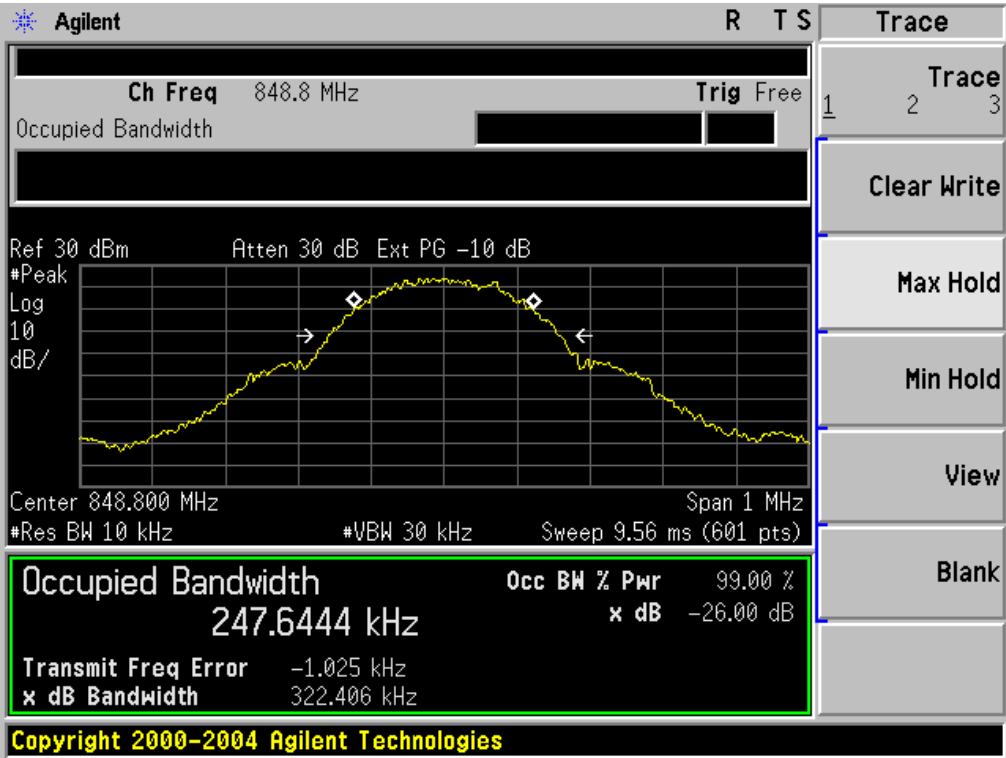


Occupied Bandwidth (99%) GPRS 1900 BAND CH 512

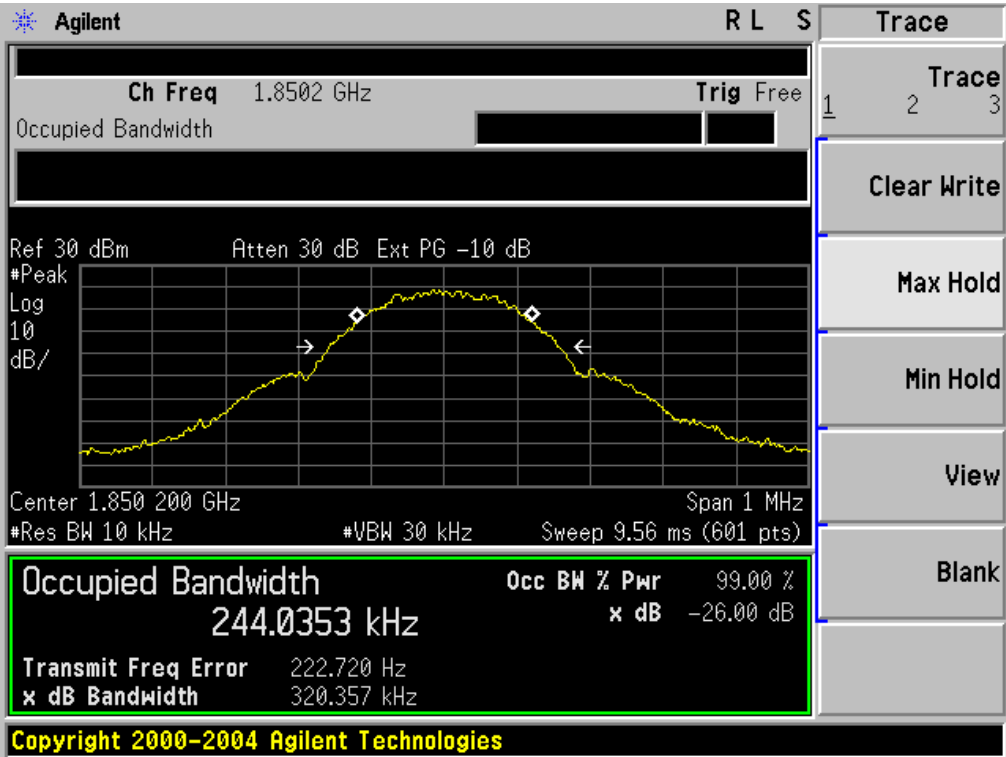


Occupied Bandwidth (99%) GPRS 1900 BAND CH 661

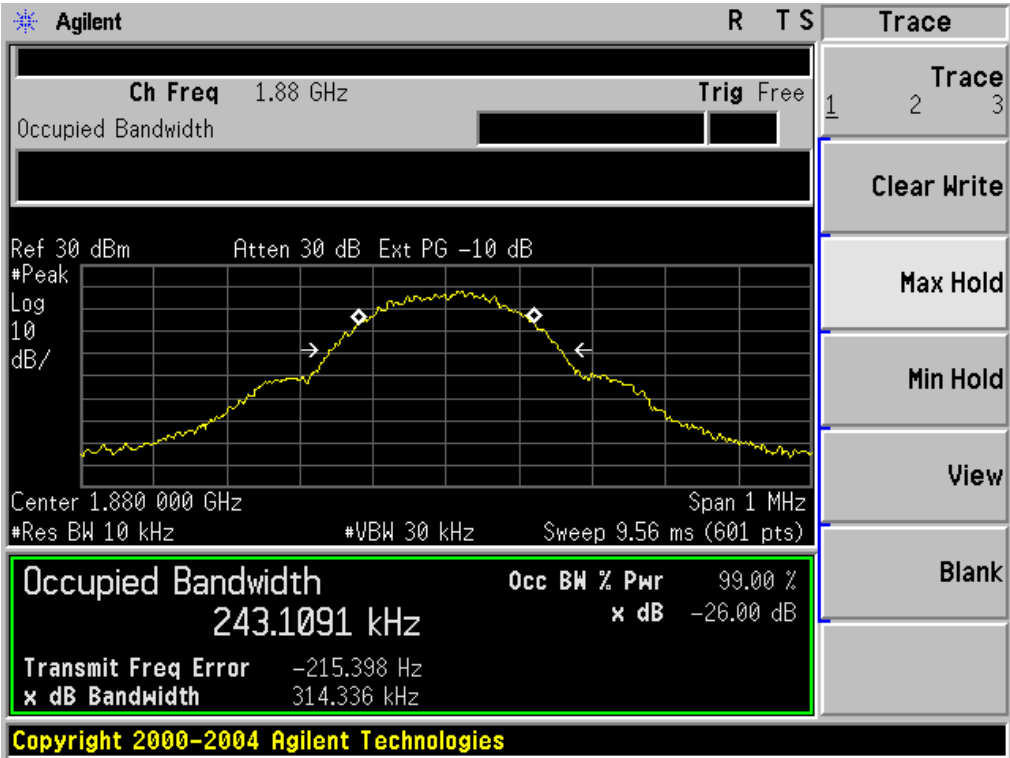


Occupied Bandwidth (99%) GPRS 1900 BAND CH 810

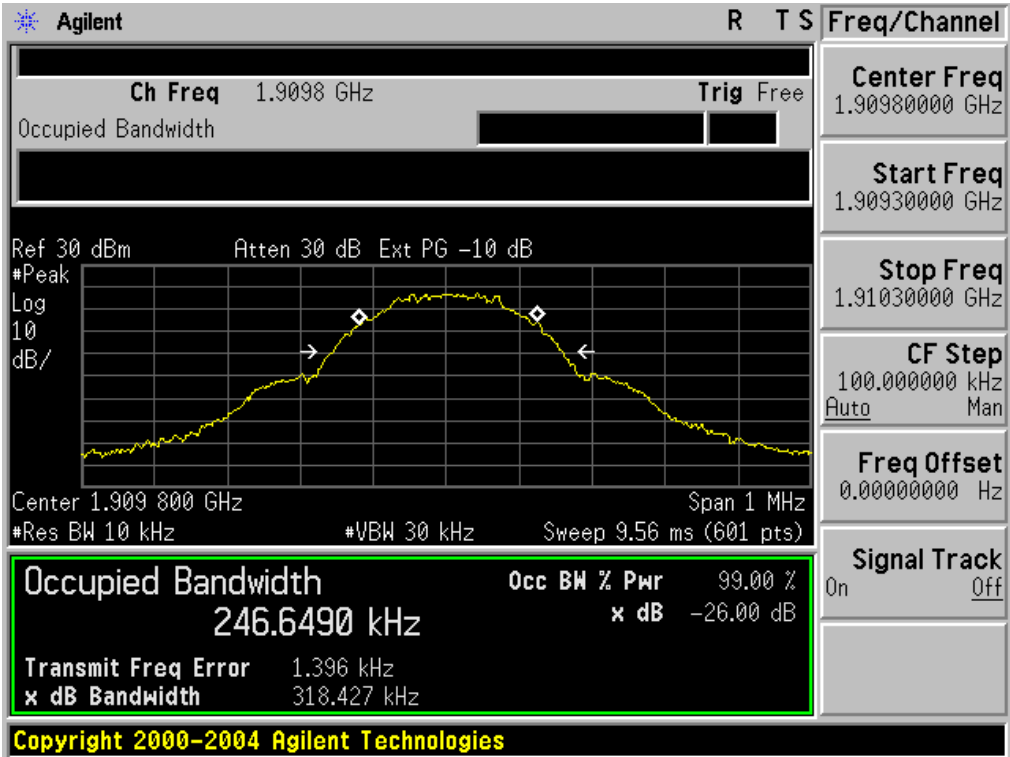


Occupied Bandwidth (99%) EGPRS 850 BAND CH 128

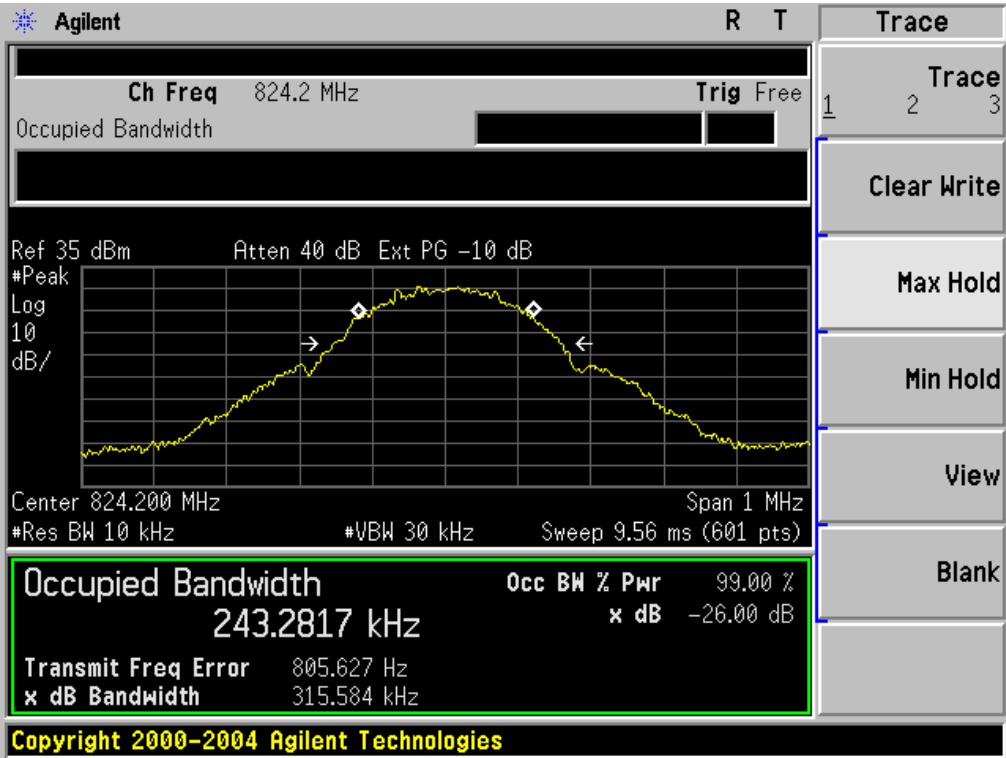


Occupied Bandwidth (99%) EGPRS 850 BAND CH 190

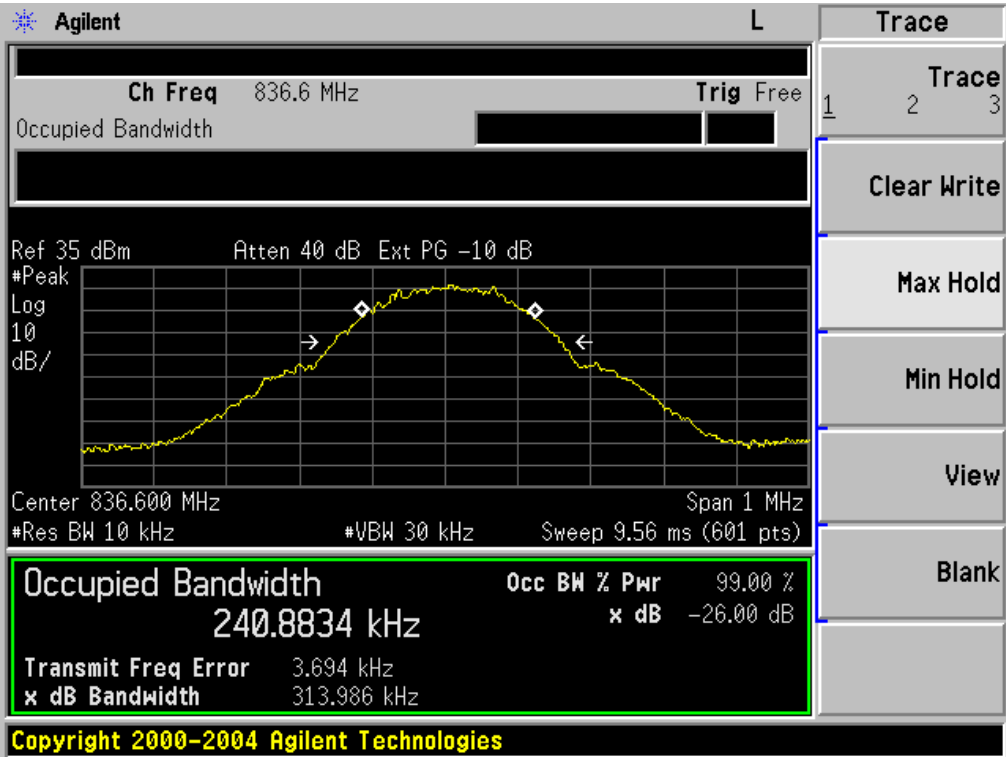


Occupied Bandwidth (99%) EGPRS 850 BAND CH 251

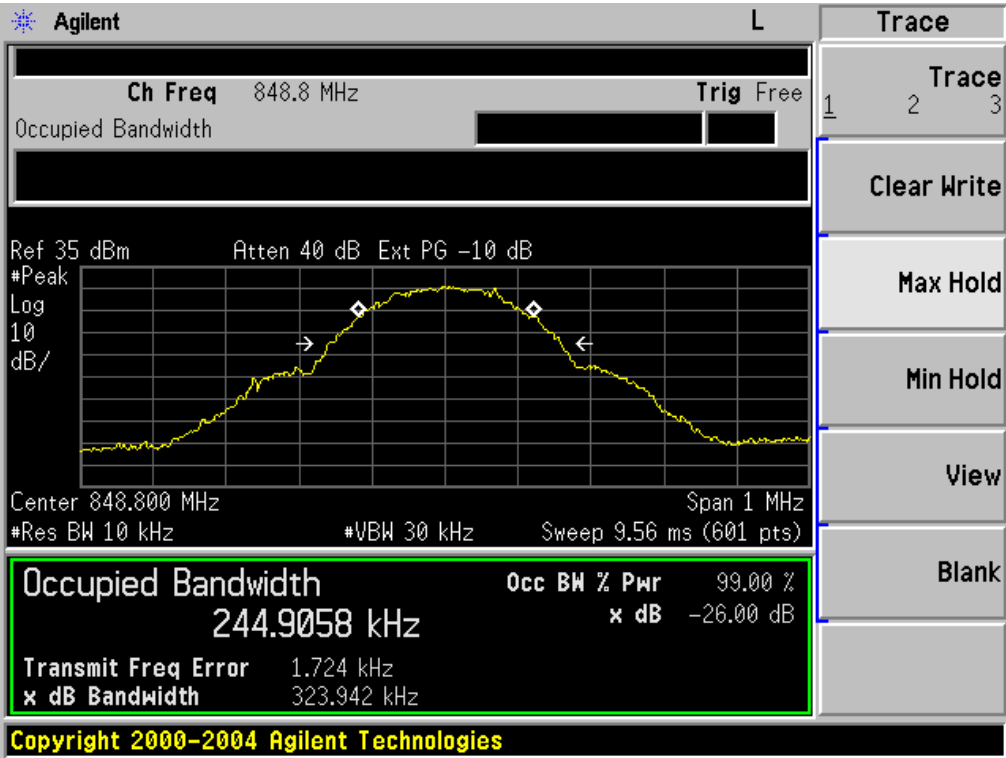


Occupied Bandwidth (99%) EGPRS 1900 BAND CH 512

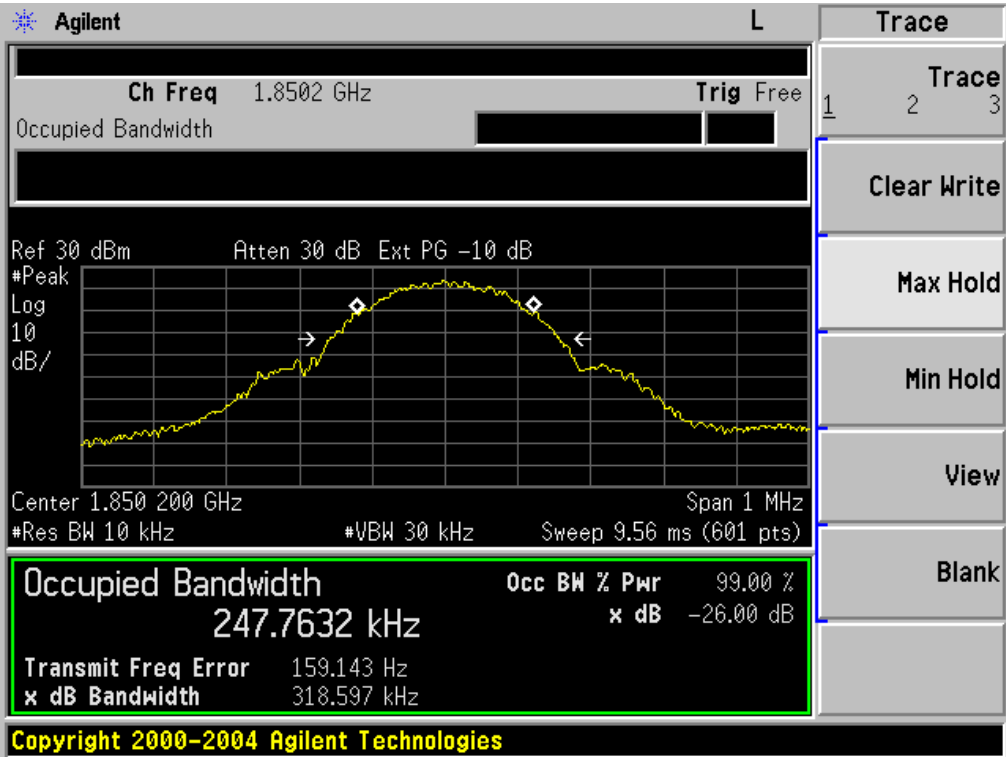


Occupied Bandwidth (99%) EGPRS 1900 BAND CH 661

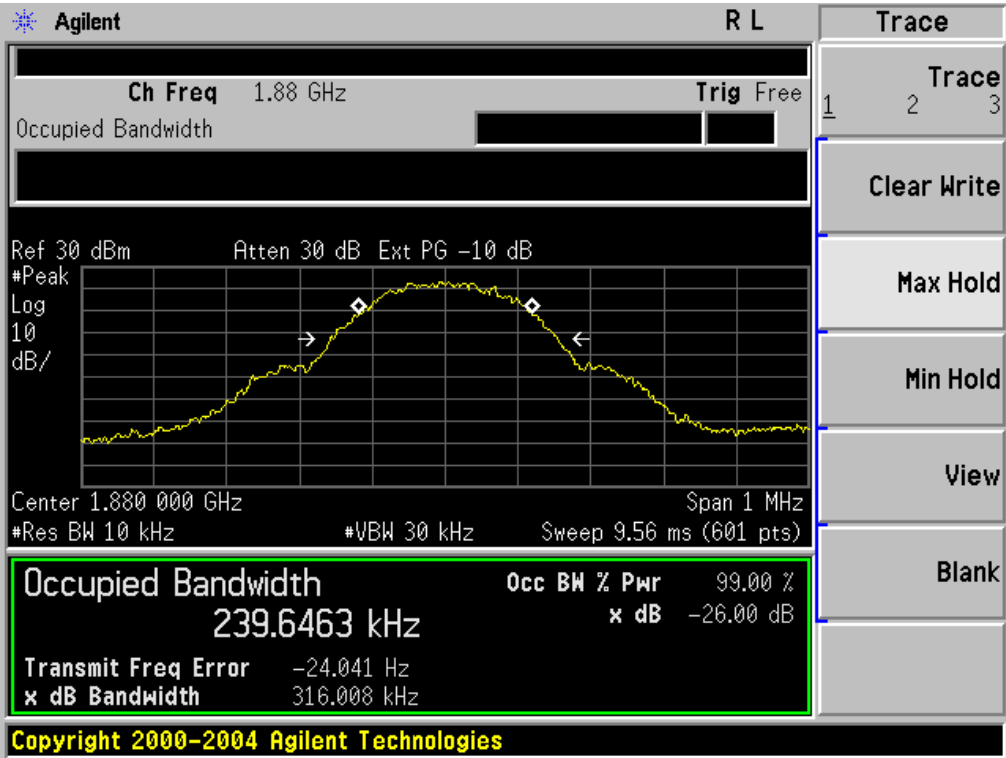


Occupied Bandwidth (99%) EGPRS 1900 BAND CH 810

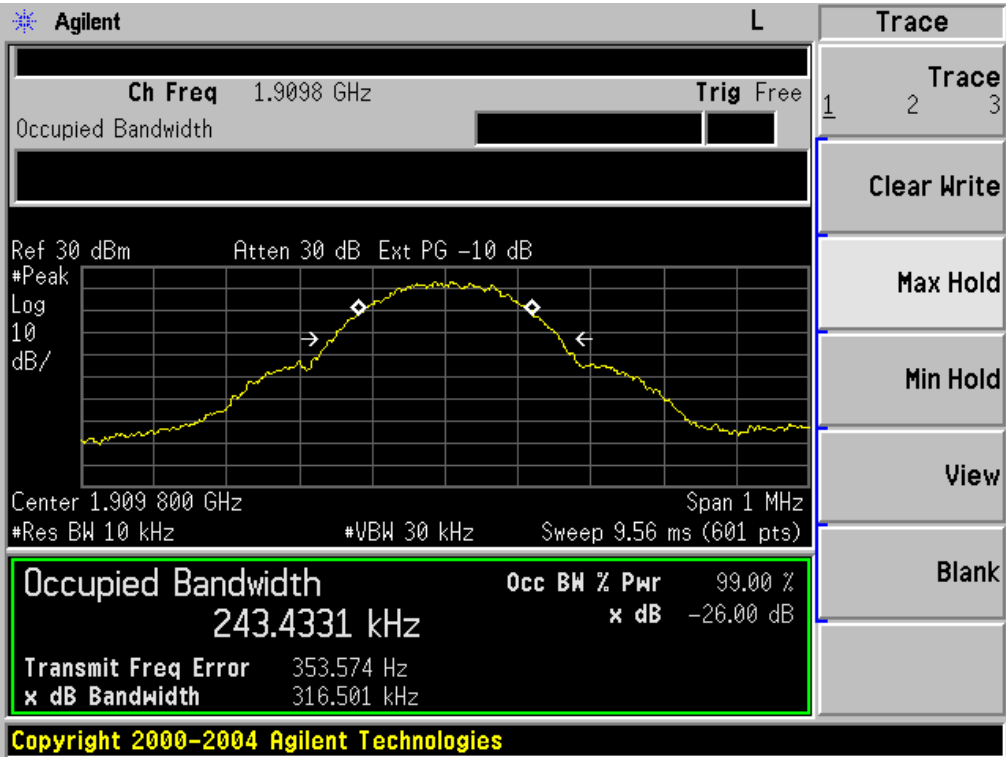


Occupied Bandwidth (99%) UMTS band II CH 9262

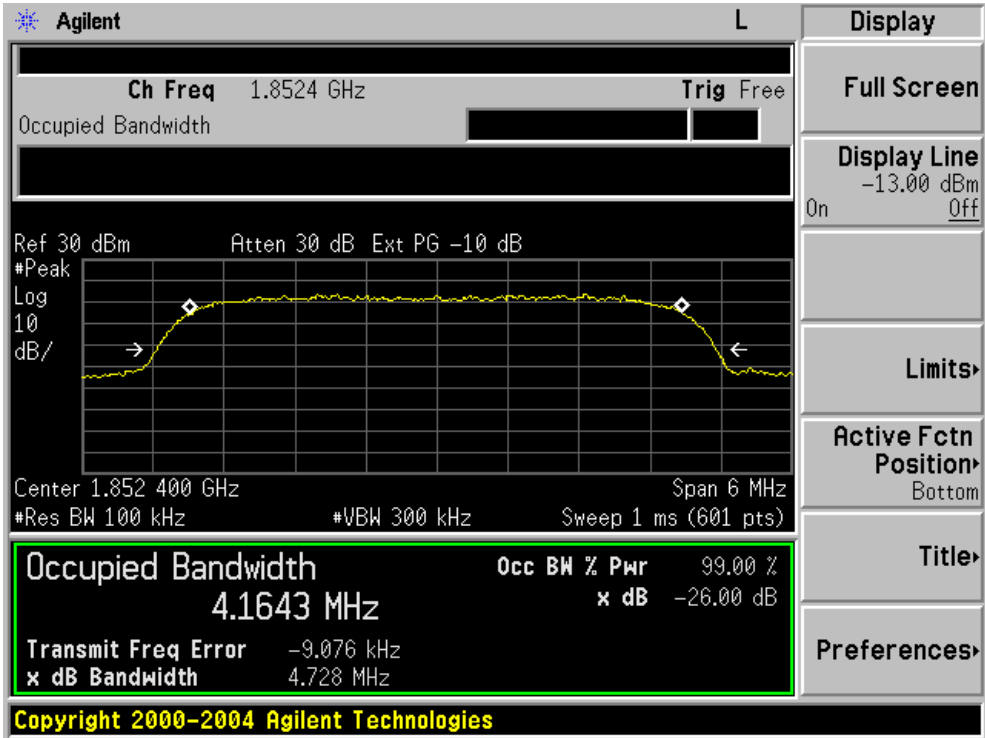


Occupied Bandwidth (99%) UMTS band II CH 9400

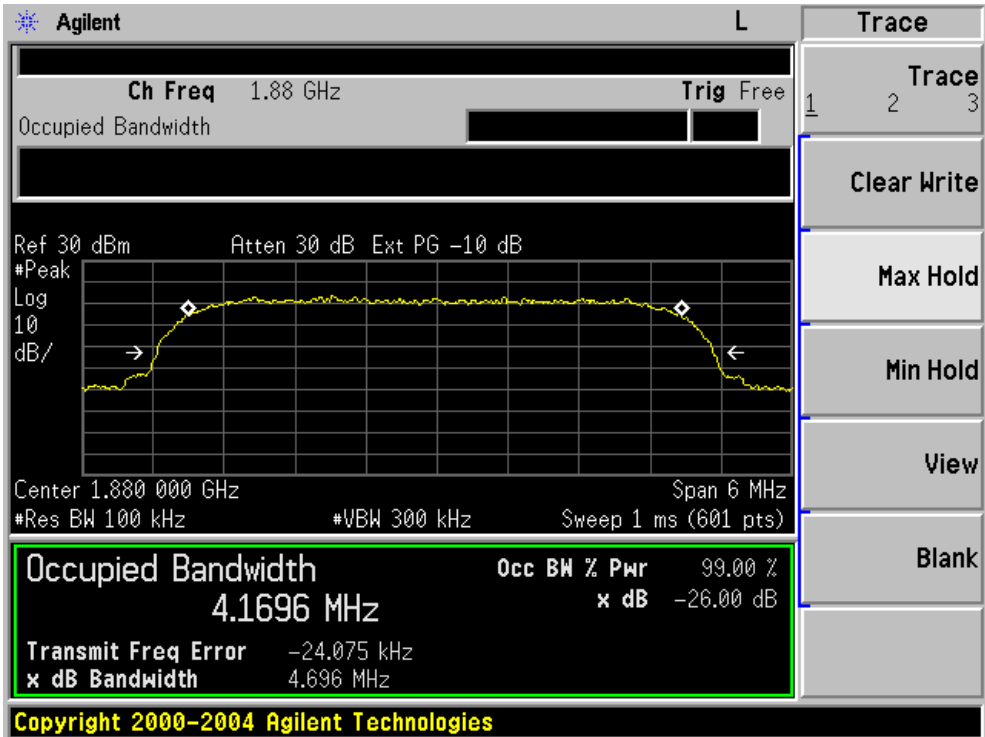


Occupied Bandwidth (99%) UMTS band II CH 9538

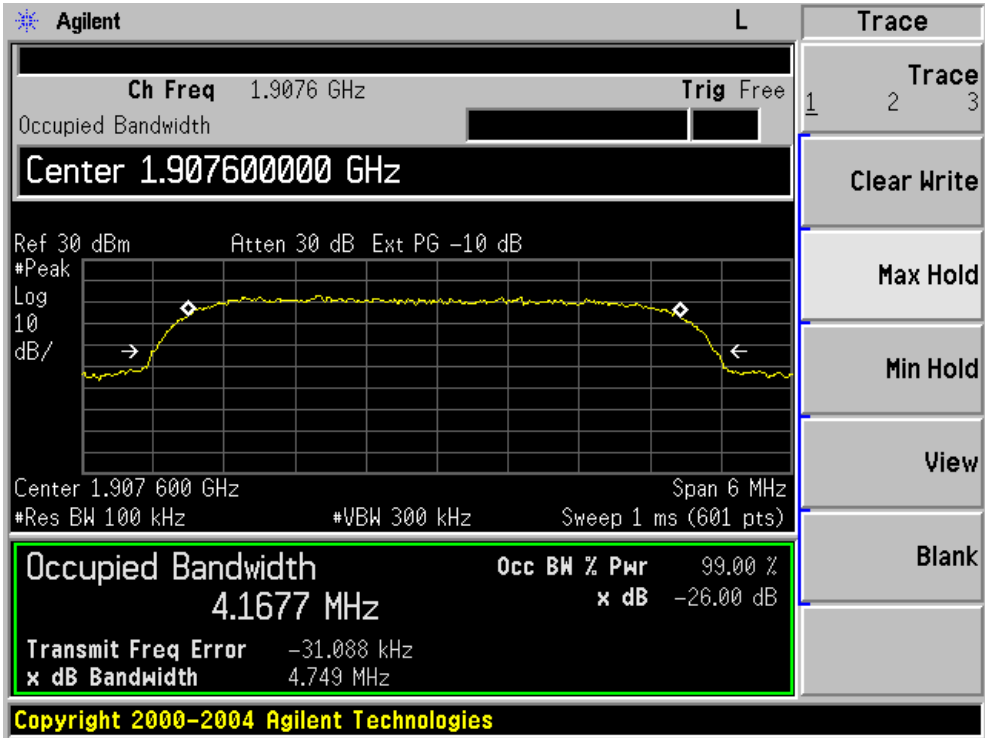


Occupied Bandwidth (99%) UMTS band V CH 4132

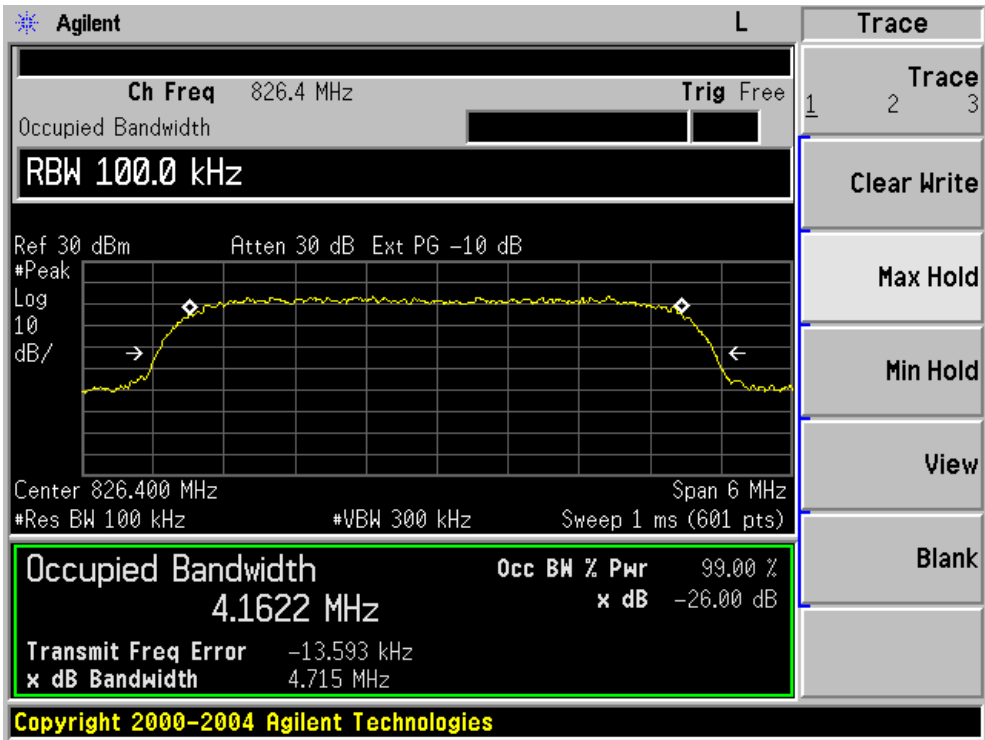

Occupied Bandwidth (99%) UMTS band V CH 4183

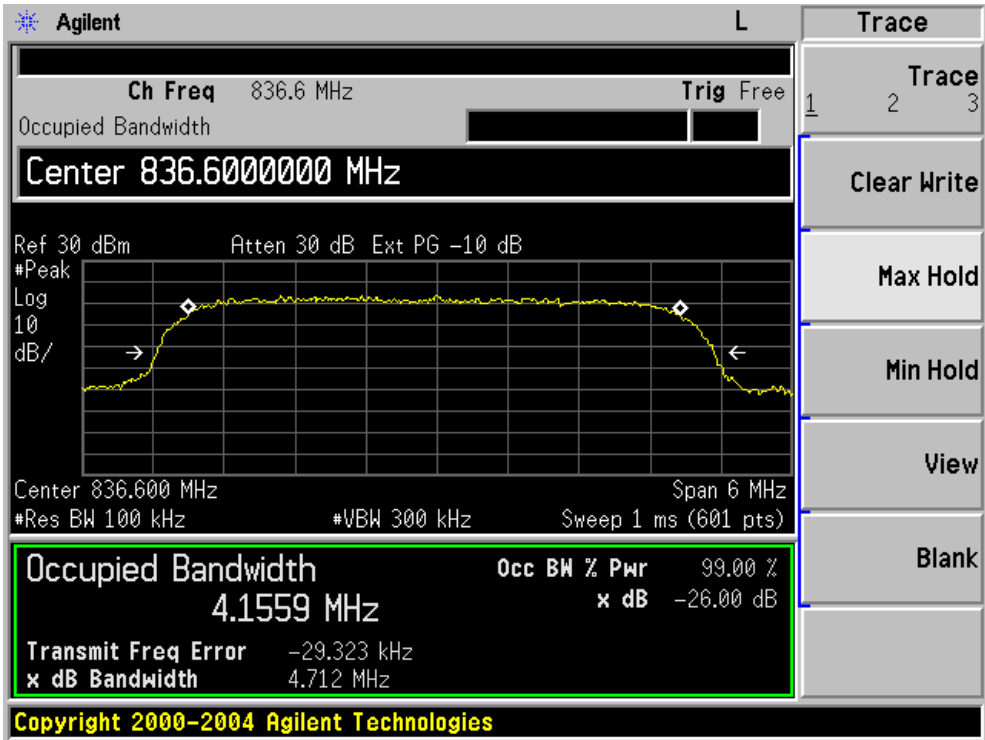


Occupied Bandwidth (99%) UMTS band V CH 4233

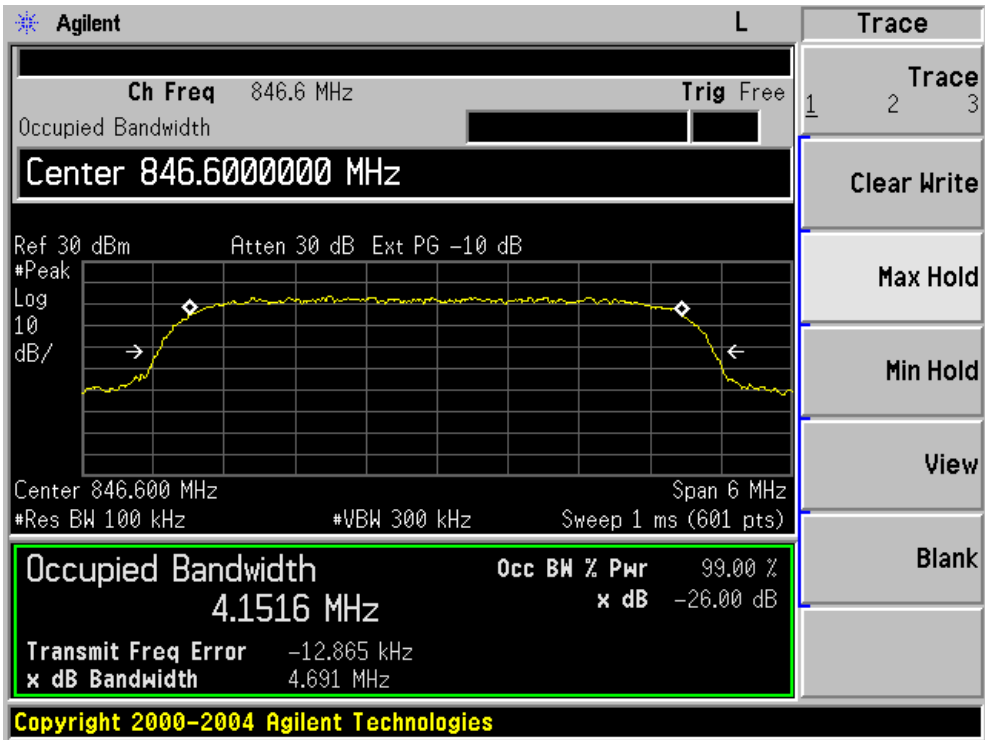


APPENDIX III

TEST PLOTS FOR BAND EDGES


Low Band Edge GSM 850 BAND CH 128

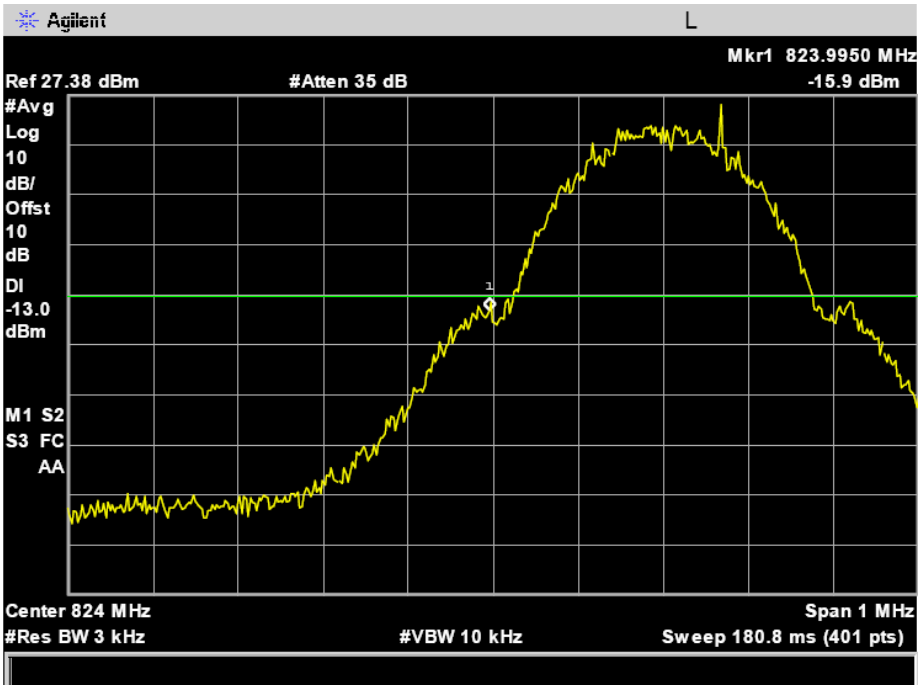


High Band Edge GSM 850 BAND CH 251

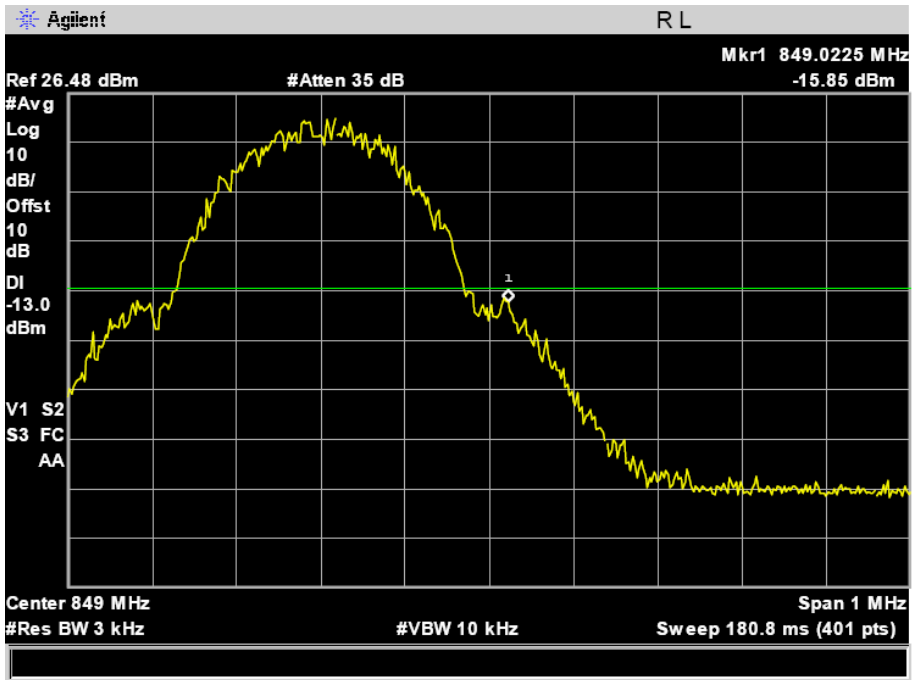


Low Band Edge PCS 1900 BAND CH 512

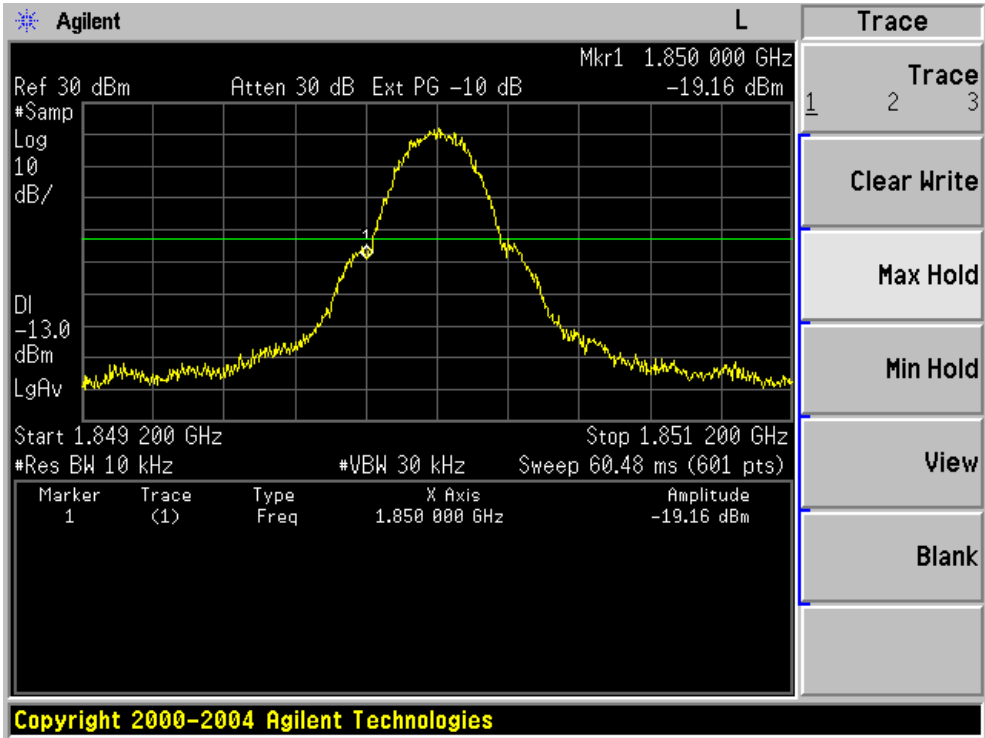


High Band Edge PCS 1900 BAND CH 810

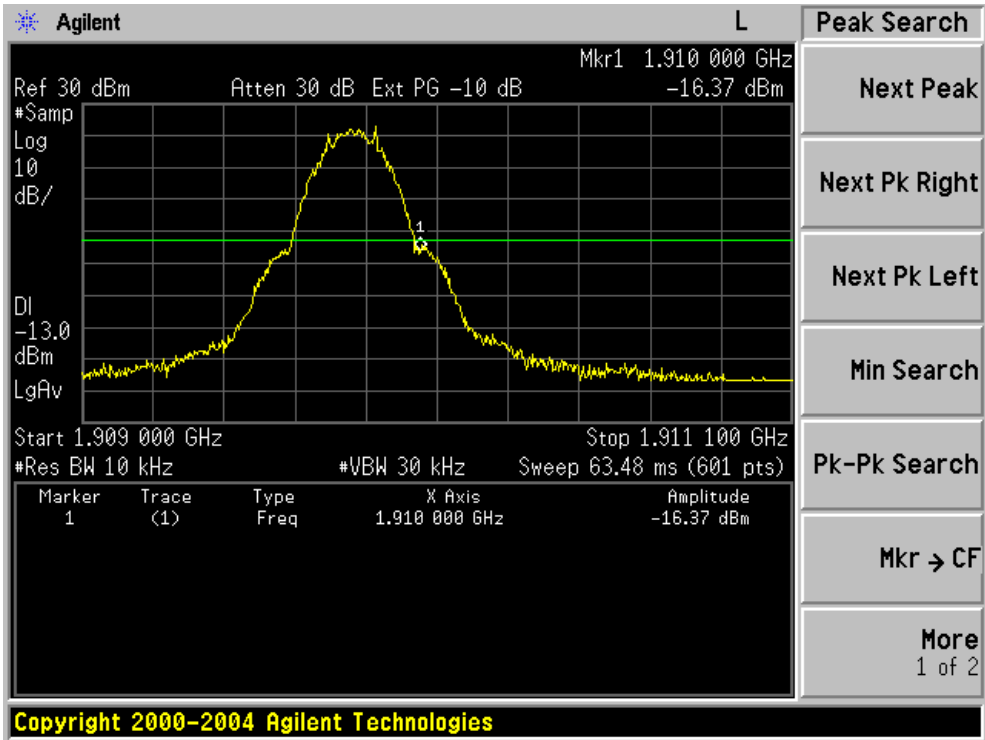


Low Band Edge GPRS 1900 BAND CH 512

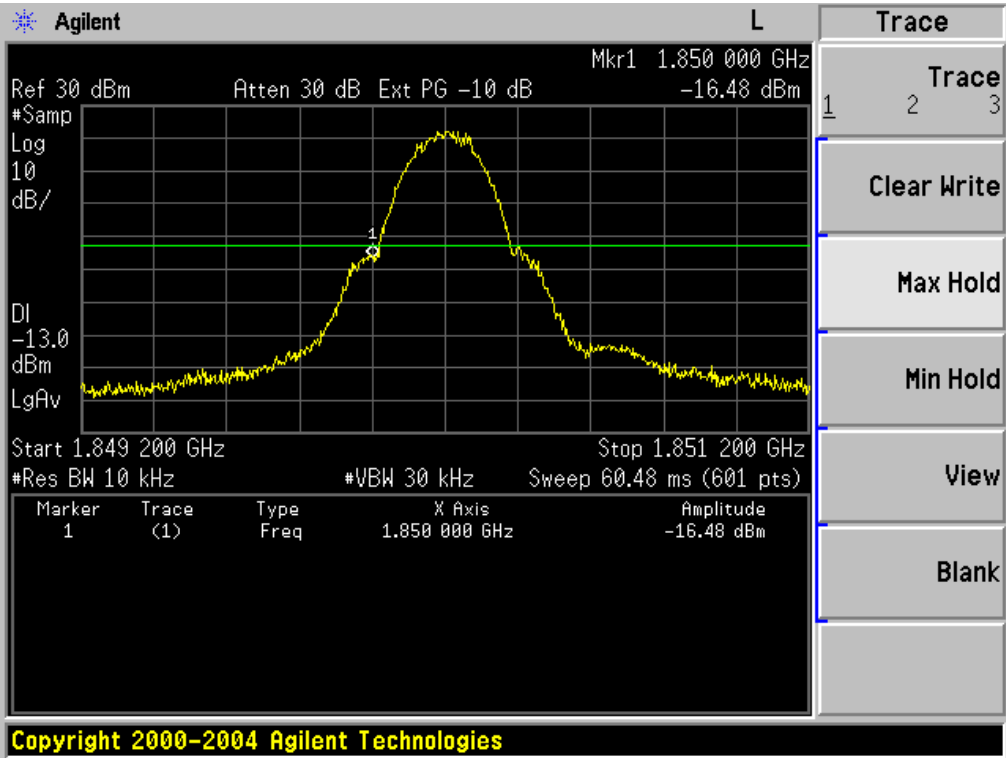


High Band Edge GPRS 1900 BAND CH 810

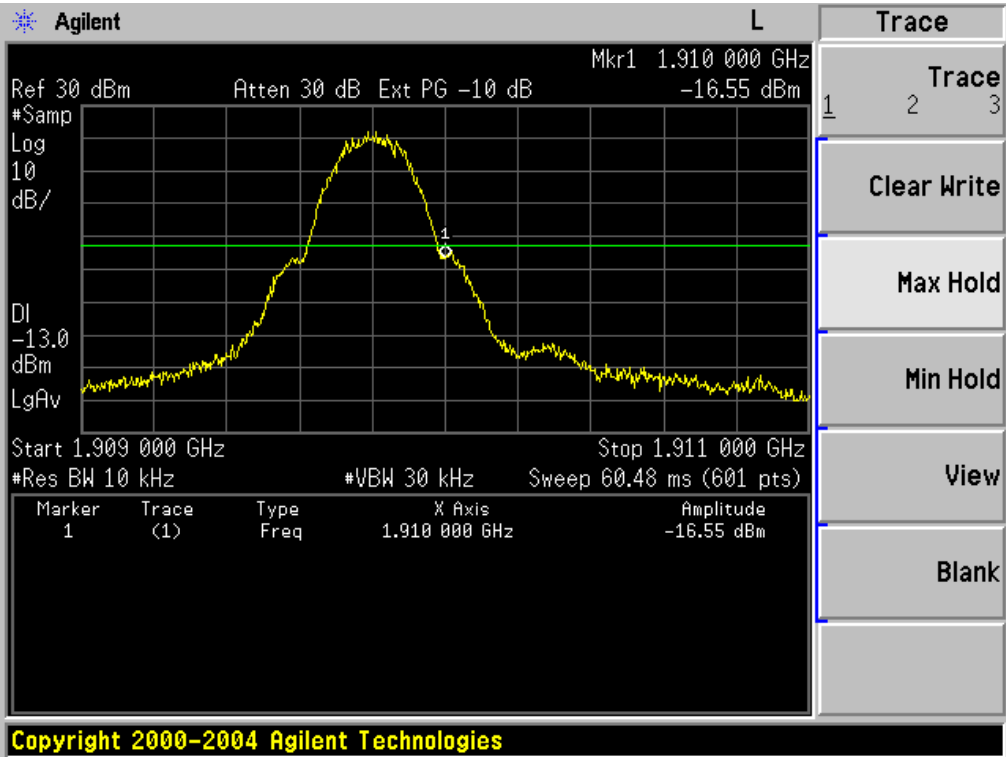


Low Band Edge EGPRS 850 BAND CH 128

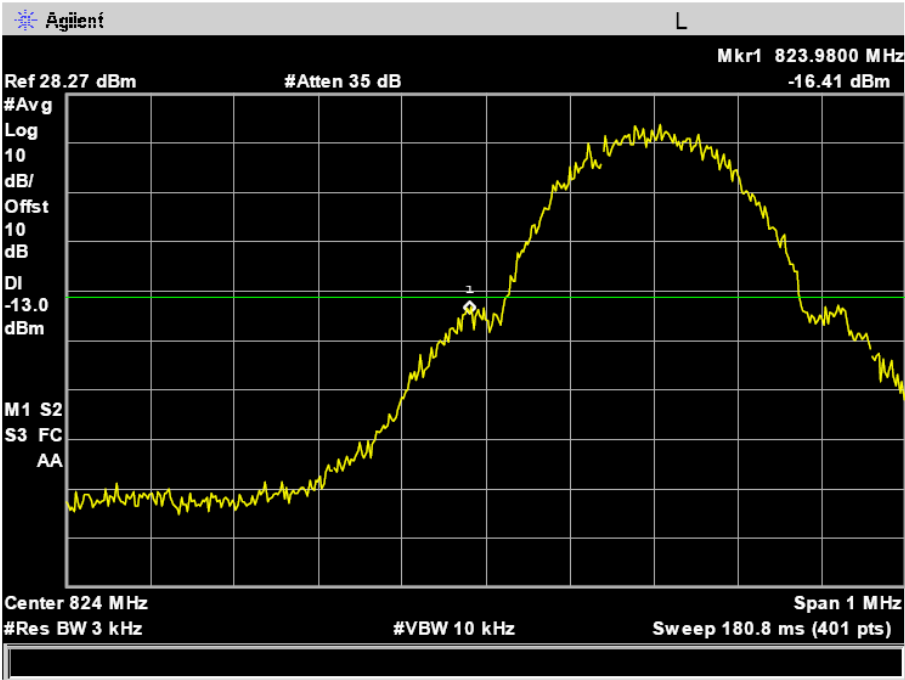


High Band Edge EGPRS 850 BAND CH 251

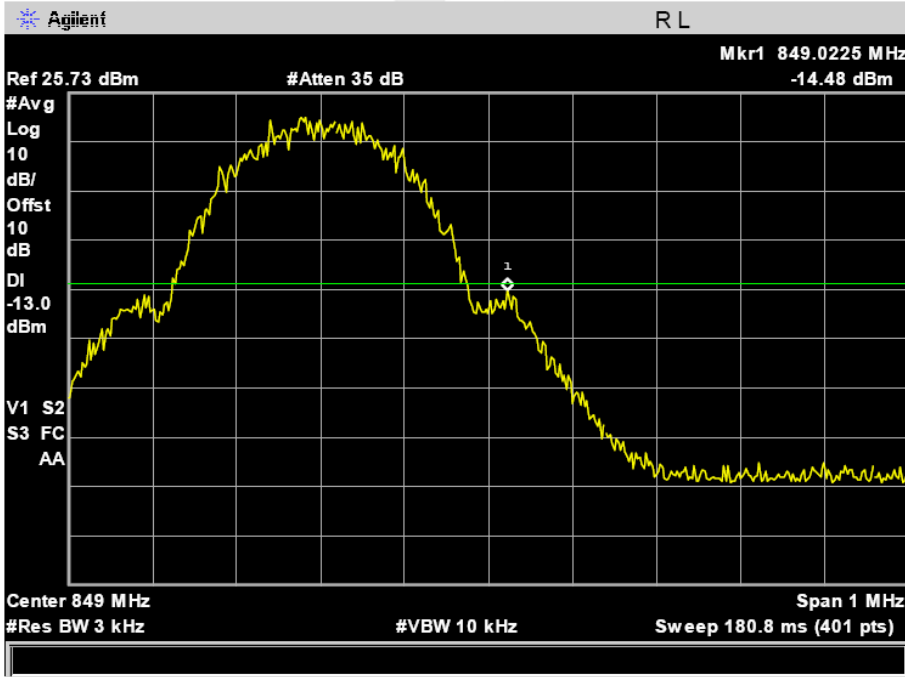


Low Band Edge EGPRS 1900 BAND CH 512

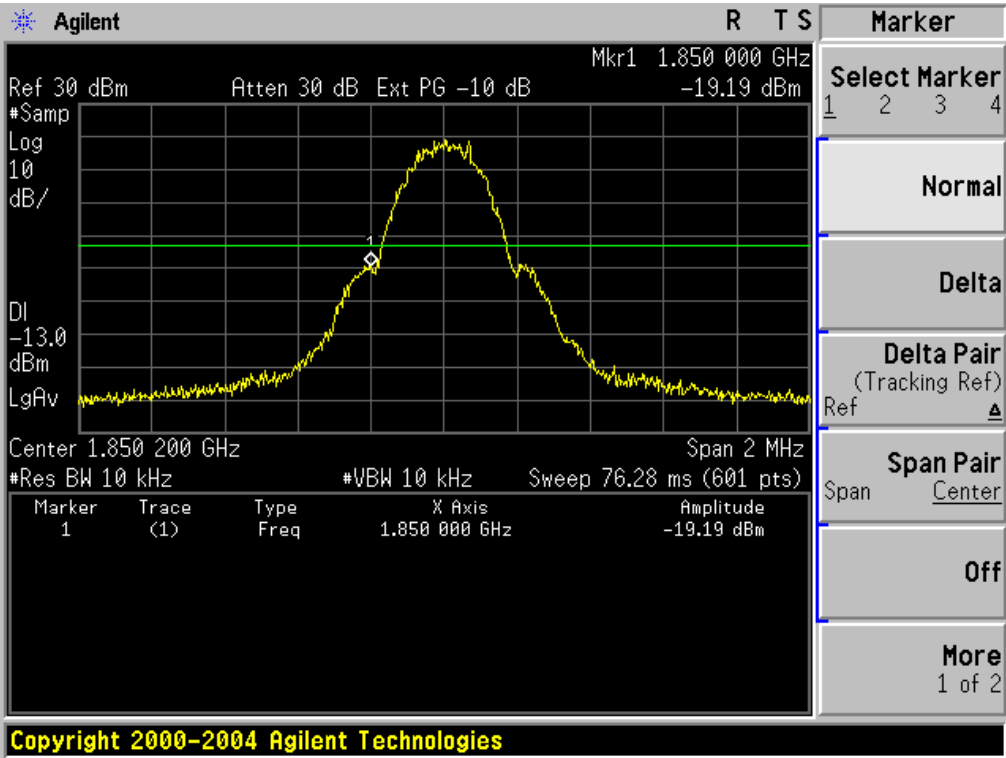


High Band Edge EGPRS 1900 BAND CH 810

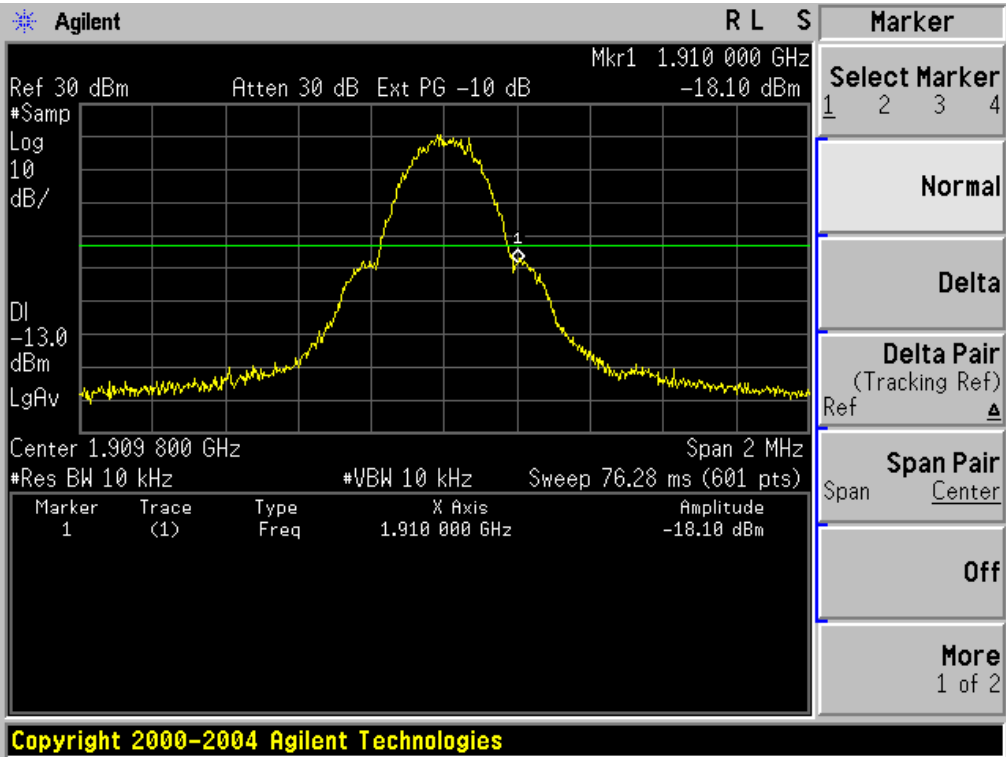


Low Band Edge UMTS BAND II CH 9262

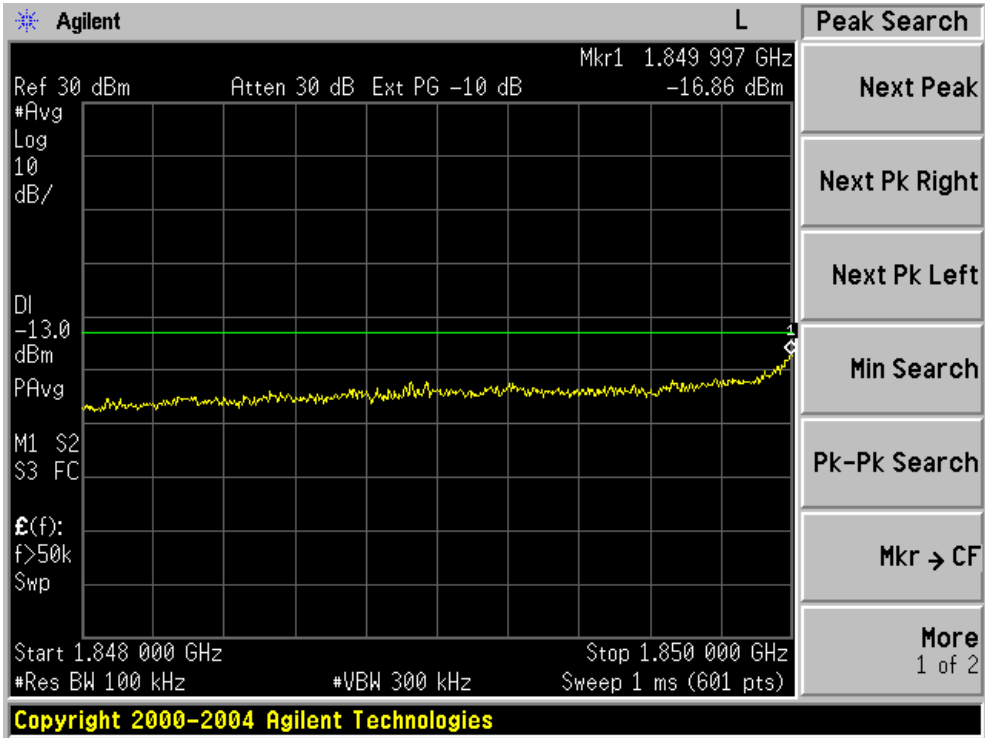


High Band Edge UMTS BAND II CH 9538

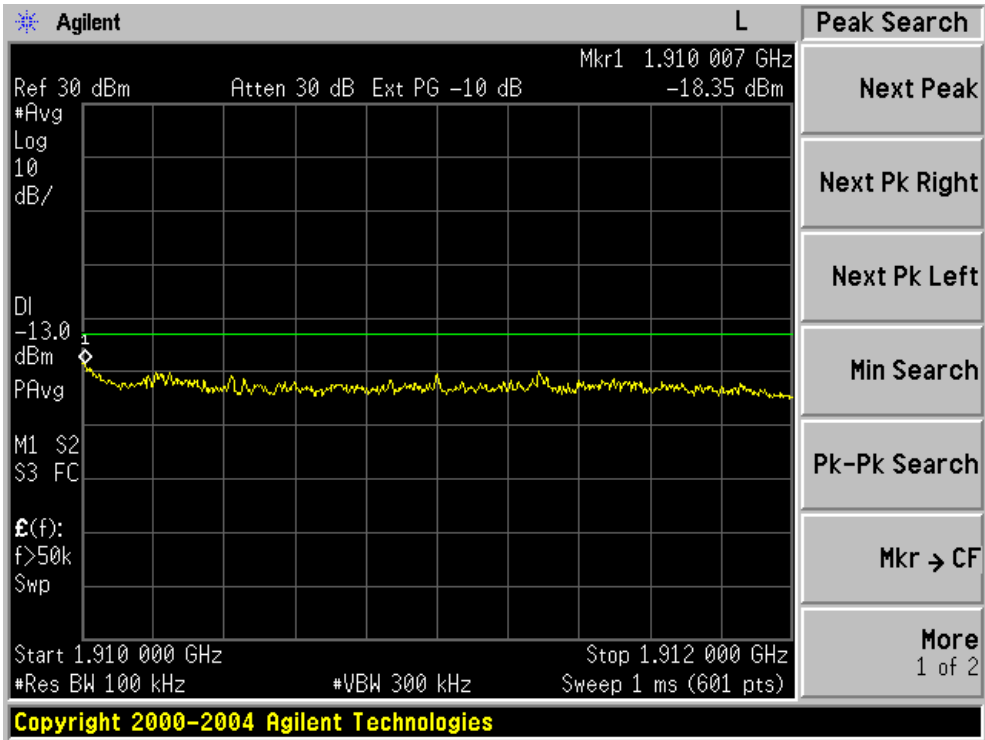

Low Band Edge UMTS BAND V CH 4132

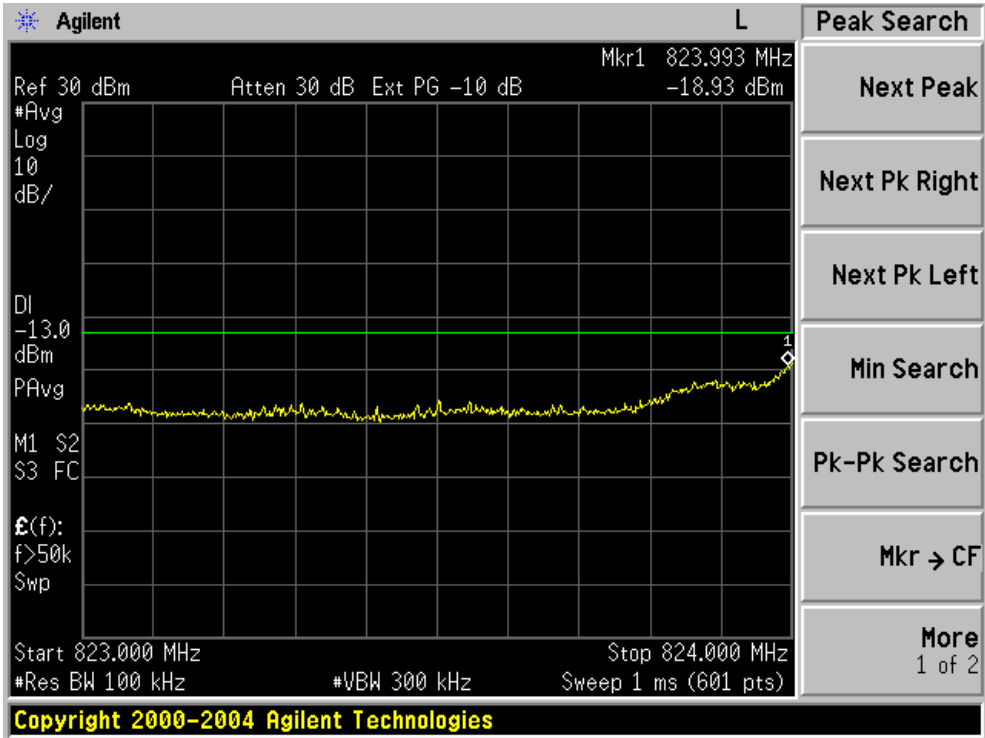


High Band Edge UMTS BAND V CH 4233

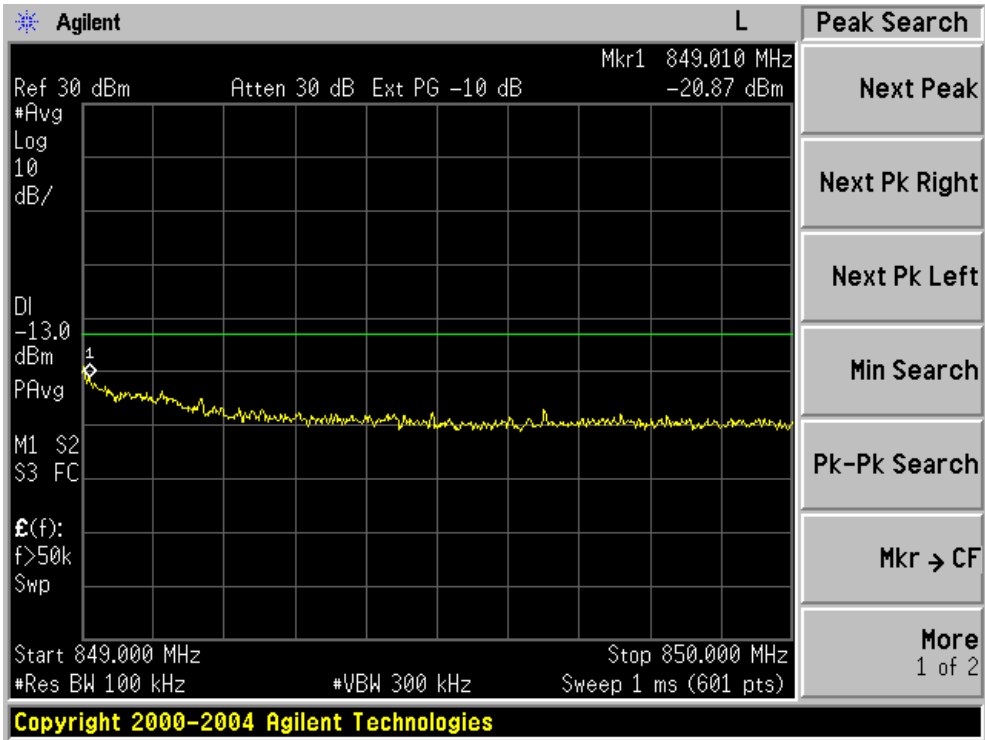

PHOTOGRAPHS OF TEST SETUP

RADIATED SPURIOUS EMISSION

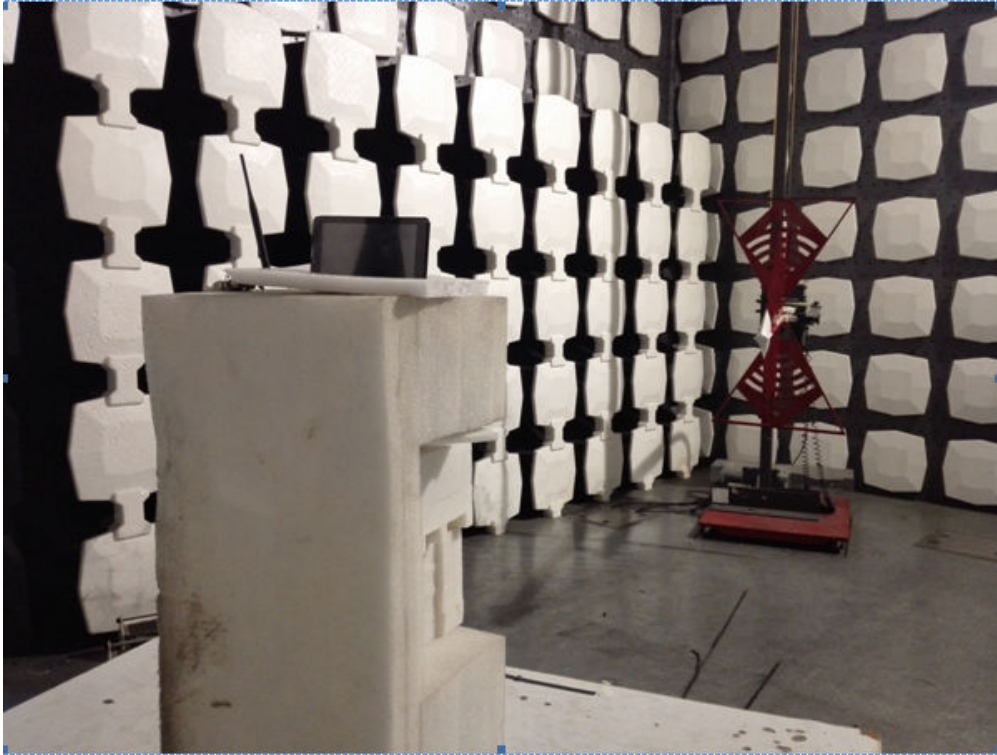

11. Photographs of the EUT

Reference to the test report No.16KWE053743F.