

---

# FCC Test Report

---

Report No.: AGC05860160301FE05

**FCC ID** : 2AH9NTBQG1084NB  
**APPLICATION PURPOSE** : Original Equipment  
**PRODUCT DESIGNATION** : Tablet PC  
**BRAND NAME** : N/A  
**MODEL NAME** : TBQG1084NB  
**CLIENT** : D.P.I.(H.K) Ltd  
**DATE OF ISSUE** : Apr.13, 2016  
**STANDARD(S)** : FCC Part 15.247  
**TEST PROCEDURE(S)** : KDB 558074 v03r04  
**REPORT VERSION** : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

| Report Version | Revise Time | Issued Date  | Valid Version | Notes           |
|----------------|-------------|--------------|---------------|-----------------|
| V1.0           | /           | Apr.13, 2016 | Valid         | Original Report |

## TABLE OF CONTENTS

|  |           |
|--|-----------|
| <b>1. VERIFICATION OF CONFORMITY .....</b>                       | <b>5</b>  |
| <b>2. GENERAL INFORMATION.....</b>                               | <b>6</b>  |
| 2.1. PRODUCT DESCRIPTION .....                                   | 6         |
| 2.2. TABLE OF CARRIER FREQUENCIES .....                          | 6         |
| 2.3. IEEE 802.11N MODULATION SCHEME .....                        | 7         |
| 2.4. RELATED SUBMITTAL(S) / GRANT (S) .....                      | 7         |
| 2.5. TEST METHODOLOGY .....                                      | 7         |
| 2.6. SPECIAL ACCESSORIES .....                                   | 8         |
| 2.7. EQUIPMENT MODIFICATIONS .....                               | 8         |
| <b>3. MEASUREMENT UNCERTAINTY.....</b>                           | <b>9</b>  |
| <b>4. DESCRIPTION OF TEST MODES.....</b>                         | <b>9</b>  |
| <b>5. SYSTEM TEST CONFIGURATION .....</b>                        | <b>10</b> |
| 5.1. CONFIGURATION OF EUT SYSTEM.....                            | 10        |
| 5.2. EQUIPMENT USED IN EUT SYSTEM.....                           | 10        |
| 5.3. SUMMARY OF TEST RESULTS .....                               | 10        |
| <b>6. TEST FACILITY.....</b>                                     | <b>11</b> |
| <b>7. OUTPUT POWER .....</b>                                     | <b>12</b> |
| 7.1. MEASUREMENT PROCEDURE.....                                  | 12        |
| 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....           | 12        |
| 7.3. LIMITS AND MEASUREMENT RESULT .....                         | 13        |
| <b>8. 6 DB BANDWIDTH .....</b>                                   | <b>15</b> |
| 8.1. MEASUREMENT PROCEDURE.....                                  | 15        |
| 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....           | 15        |
| 8.3. LIMITS AND MEASUREMENT RESULTS .....                        | 16        |
| <b>9. CONDUCTED SPURIOUS EMISSION .....</b>                      | <b>24</b> |
| 9.1. MEASUREMENT PROCEDURE.....                                  | 24        |
| 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....           | 24        |
| 9.3. MEASUREMENT EQUIPMENT USED .....                            | 24        |
| 9.4. LIMITS AND MEASUREMENT RESULT .....                         | 24        |
| <b>10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY .....</b> | <b>43</b> |
| 10.1 MEASUREMENT PROCEDURE.....                                  | 43        |
| 10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....           | 43        |
| 10.3 MEASUREMENT EQUIPMENT USED .....                            | 43        |
| 10.4 LIMITS AND MEASUREMENT RESULT .....                         | 43        |
| <b>11. RADIATED EMISSION.....</b>                                | <b>51</b> |

11.1. MEASUREMENT PROCEDURE ..... 51

11.2. TEST SETUP ..... 52

11.3. LIMITS AND MEASUREMENT RESULT ..... 53

11.4. TEST RESULT ..... 53

**12. BAND EDGE EMISSION..... 59**

12.1. MEASUREMENT PROCEDURE..... 59

12.2. TEST SET-UP..... 59

12.3. TEST RESULT ..... 60

**13. FCC LINE CONDUCTED EMISSION TEST ..... 92**

13.1. LIMITS OF LINE CONDUCTED EMISSION TEST ..... 92

13.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST ..... 92

13.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST ..... 93

13.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST ..... 93

13.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST ..... 94

**APPENDIX A: PHOTOGRAPHS OF TEST SETUP..... 96**

**APPENDIX B: PHOTOGRAPHS OF EUT..... 98**


## 1. VERIFICATION OF CONFORMITY

|                                 |  |
|---------------------------------|--|
| <b>Applicant</b>                | D.P.I.(H.K) Ltd  |
| <b>Address</b>                  | Unit A.4/f .Big Star Centra.8 Wang Kwong Road, Kowloon Bay, Kowloon, Hong Kong . |
| <b>Manufacturer</b>             | D.P.I.(H.K) Ltd  |
| <b>Address</b>                  | Unit A.4/f .Big Star Centra.8 Wang Kwong Road, Kowloon Bay, Kowloon, Hong Kong . |
| <b>Product Designation</b>      | Tablet PC  |
| <b>Brand Name</b>               | N/A  |
| <b>Test Model</b>               | TBQG1084NB   |
| <b>Date of test</b>             | Apr.07, 2016 to Apr.12, 2016   |
| <b>Deviation</b>                | None   |
| <b>Condition of Test Sample</b> | Normal   |
| <b>Test Result</b>              | Pass   |
| <b>Report Template</b>          | AGCRT-US-BGN/RF  |

We hereby certify that:


The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Tested by




Max Zhang(Zhang Yi) Apr.13, 2016

Reviewed by

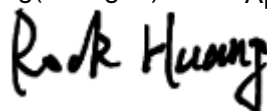

Rock Huang(Huang Dinglue) Apr.13, 2016

Approved by

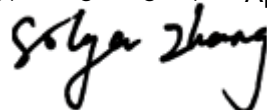

Solger Zhang(Zhang Hongyi)  
Authorized Officer Apr.13, 2016

## 2. GENERAL INFORMATION

### 2.1. PRODUCT DESCRIPTION

The EUT is designed as "Tablet PC". It is designed by way of utilizing the DSSS and OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

|                            |   |
|----------------------------|---|
| <b>Operation Frequency</b> | 2.412 GHz~2.462GHz  |
| <b>Output Power</b>        | IEEE 802.11b:9.52dBm; IEEE 802.11g:7.66dBm;<br>IEEE 802.11n(20):7.38dBm; IEEE 802.11n(40):4.26dBm |
| <b>Modulation</b>          | DSSS(DBPSK/DQPSK/CCK);OFDM(BPSK/QPSK/16-QAM/64-QAM)   |
| <b>Number of channels</b>  | 11  |
| <b>Hardware Version</b>    | EM_T6511A_V6.2L   |
| <b>Software Version</b>    | V1.0  |
| <b>Antenna Designation</b> | Integrated Antenna  |
| <b>Antenna Gain</b>        | 0dBi  |
| <b>Power Supply</b>        | DC 3.7V by battery or DC 5V by adapter  |

### 2.2. TABLE OF CARRIER FREQUENCIES

| Frequency Band | Channel Number | Frequency |
|----------------|----------------|-----------|
| 2400~2483.5MHZ | 1              | 2412 MHZ  |
|                | 2              | 2417 MHZ  |
|                | 3              | 2422 MHZ  |
|                | 4              | 2427 MHZ  |
|                | 5              | 2432 MHZ  |
|                | 6              | 2437 MHZ  |
|                | 7              | 2442 MHZ  |
|                | 8              | 2447 MHZ  |
|                | 9              | 2452 MHZ  |
|                | 10             | 2457 MHZ  |
|                | 11             | 2462 MHZ  |

Note: For 20MHZ bandwidth system use Channel 1 to Channel 11  
For 40MHZ bandwidth system use Channel 3 to Channel 9

### 2.3. IEEE 802.11N MODULATION SCHEME

| MCS Index | Nss | Modulation | R   | NBPSC | NCBPS |       | NDBPS |       | Data rate(Mbps) |       |
|-----------|-----|------------|-----|-------|-------|-------|-------|-------|-----------------|-------|
|           |     |            |     |       |       |       |       |       | 800nsGI         |       |
|           |     |            |     |       | 20MHz | 40MHz | 20MHz | 40MHz | 20MHz           | 40MHz |
| 0         | 1   | BPSK       | 1/2 | 1     | 52    | 108   | 26    | 54    | 6.5             | 13.5  |
| 1         | 1   | QPSK       | 1/2 | 2     | 104   | 216   | 52    | 108   | 13.0            | 27.0  |
| 2         | 1   | QPSK       | 3/4 | 2     | 104   | 216   | 78    | 162   | 19.5            | 40.5  |
| 3         | 1   | 16-QAM     | 1/2 | 4     | 208   | 432   | 104   | 216   | 26.0            | 54.0  |
| 4         | 1   | 16-QAM     | 3/4 | 4     | 208   | 432   | 156   | 324   | 39.0            | 81.0  |
| 5         | 1   | 64-QAM     | 2/3 | 6     | 312   | 648   | 208   | 432   | 52.0            | 108.0 |
| 6         | 1   | 64-QAM     | 3/4 | 6     | 312   | 648   | 234   | 489   | 58.5            | 121.5 |
| 7         | 1   | 64-QAM     | 5/6 | 6     | 312   | 648   | 260   | 540   | 65.0            | 135.0 |

| Symbol | Explanation                             |
|--------|---|
| NSS    | Number of spatial streams               |
| R      | Code rate                               |
| NBPSC  | Number of coded bits per single carrier |
| NCBPS  | Number of coded bits per symbol         |
| NDBPS  | Number of data bits per symbol          |
| GI     | Guard interval                          |

### 2.4. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AH9NTBQG1084NB** filing to comply with the FCC Part 15 requirements.

### 2.5. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4 (2009).

Radiated testing was performed at an antenna to EUT distance 3 meters.

Others testing (listed at item 5.3) was performed according to the procedures in FCC Part 15.247 rules KDB 558074 D01 DTS Meas Guidance v03r04.

## **2.6. SPECIAL ACCESSORIES**

Refer to section 5.2.

## **2.7. EQUIPMENT MODIFICATIONS**

Not available for this EUT intended for grant.



### 3. MEASUREMENT UNCERTAINTY

Conducted measurement: +/- 3.18dB

Radiated measurement: +/- 3.91dB

### 4. DESCRIPTION OF TEST MODES

| NO. | TEST MODE DESCRIPTION |
|-----|-----------------------|
| 1   | Low channel TX        |
| 2   | Middle channel TX     |
| 3   | High channel TX       |
| 4   | Normal operating      |

Note:

Transmit by 802.11b with Data rate (1/2/5.5/11)

Transmit by 802.11g with Data rate (6/9/12/18/24/36/48/54)

Transmit by 802.11n (20MHz) with Data rate (6.5/13/19.5/26/39/52/58.5/65)

Transmit by 802.11n (40MHz) with Data rate

(13.5/27/40.5/54/81/108/121.5/135)


**Note:**

1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the eut is operating at its maximum duty cycle>or equal 98%
2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.
3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure:

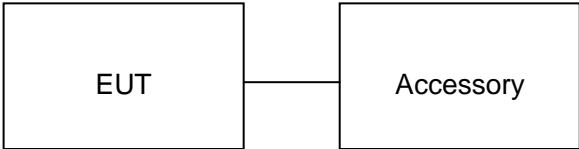

5.2. EQUIPMENT USED IN EUT SYSTEM

| Item | Equipment | Model No.    | ID or Specification | Remark  |
|------|-----------|--------------|---------------------|---------|
| 1    | Tablet PC | TBQG1084NB   | 2AH9NTBQG1084NB     | EUT     |
| 2    | Adapter   | THX-050200KE | N/A                 | A.E     |
| 3    | Displayer | ZT-3034      | N/A                 | Support |

5.3. SUMMARY OF TEST RESULTS

| FCC RULES | DESCRIPTION OF TEST                             | RESULT    |
|-----------|---|-----------|
| §15.247   | Output Power                                    | Compliant |
| §15.247   | 6 dB Bandwidth                                  | Compliant |
| §15.247   | Conducted Spurious Emission                     | Compliant |
| §15.247   | Maximum Conducted Output Power SPECTRAL Density | Compliant |
| §15.209   | Radiated Emission                               | Compliant |
| §15.247   | Band Edges                                      | Compliant |
| §15.207   | Line Conduction Emission                        | Compliant |

## 6. TEST FACILITY

|                      |  |
|----------------------|--|
| Site                 | Dongguan Precise Testing Service Co., Ltd.   |
| Location             | Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan, Guangdong, China.  |
| FCC Registration No. | 371540   |
| Description          | The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009. |

### ALL TEST EQUIPMENT LIST

| Radiated Emission Test Site         |                 |              |               |                  |                 |
|-------------------------------------|-----------------|--------------|---------------|------------------|-----------------|
| Name of Equipment                   | Manufacturer    | Model Number | Serial Number | Last Calibration | Due Calibration |
| EMI Test Receiver                   | Rohde & Schwarz | ESCI         | 101417        | July 4, 2015     | July 3, 2016    |
| Trilog Broadband Antenna (25M-1GHz) | SCHWARZBECK     | VULB9160     | 9160-3355     | July 4, 2015     | July 3, 2016    |
| Signal Amplifier                    | SCHWARZBECK     | BBV 9475     | 9745-0013     | July 4, 2015     | July 3, 2016    |
| RF Cable                            | SCHWARZBECK     | AK9515E      | 96221         | July 4, 2015     | July 3, 2016    |
| 3m Anechoic Chamber                 | CHENGYU         | 966          | PTS-001       | June 6, 2015     | June 5, 2016    |
| MULTI-DEVICE Positioning Controller | Max-Full        | MF-7802      | MF780208339   | N/A              | N/A             |
| Active loop antenna (9K-30MHz)      | Schwarzbeck     | FMZB1519     | 1519-038      | June 6, 2015     | June 5, 2016    |
| Spectrum analyzer                   | Agilent         | E4407B       | MY46185649    | June 6, 2015     | June 5, 2016    |
| Power Sensor                        | Agilent         | U2021XA      | MY55050474    | June 6, 2015     | June 5, 2016    |
| Horn Antenna (1G-18GHz)             | SCHWARZBECK     | BBHA9120D    | 9120D-1246    | June 6, 2015     | June 5, 2016    |
| Horn Ant (18G-40GHz)                | Schwarzbeck     | BBHA 9170    | 9170-181      | June 6, 2015     | June 5, 2016    |

| Conducted Emission Test Site   |                 |              |               |                  |                 |
|--------------------------------|-----------------|--------------|---------------|------------------|-----------------|
| Name of Equipment              | Manufacturer    | Model Number | Serial Number | Last Calibration | Due Calibration |
| EMI Test Receiver              | Rohde & Schwarz | ESCI         | 101417        | July 4, 2015     | July 3, 2016    |
| Artificial Mains Network       | Narda           | L2-16B       | 000WX31025    | July 8, 2015     | July 7, 2016    |
| Artificial Mains Network (AUX) | Narda           | L2-16B       | 000WX31026    | July 8, 2015     | July 7, 2016    |
| RF Cable                       | SCHWARZBECK     | AK9515E      | 96222         | July 4, 2015     | July 3, 2016    |
| Shielded Room                  | CHENGYU         | 843          | PTS-002       | June 6, 2015     | June 5, 2016    |

## 7. OUTPUT POWER

### 7.1. MEASUREMENT PROCEDURE


For average power test:

1. Connect EUT RF output port to power sensor through an RF attenuator.
2. Connect the power sensor to the PC.
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
4. Record the maximum power from the software.

**Note :** The EUT was tested according to KDB 558074v03r04 for compliance to FCC 47CFR 15.247 requirements.

### 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

#### AVERAGE POWER SETUP

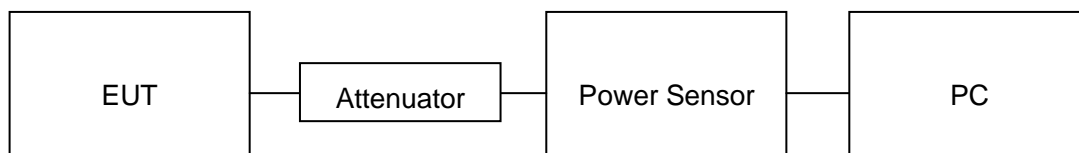

### 7.3. LIMITS AND MEASUREMENT RESULT

|                  |                          |
|------------------|--------------------------|
| <b>TEST ITEM</b> | OUTPUT POWER             |
| <b>TEST MODE</b> | 802.11b with data rate 1 |

| Frequency (GHz) | Average Power (dBm) | Applicable Limits (dBm) | Pass or Fail |
|-----------------|---------------------|-------------------------|--------------|
| 2.412           | 9.43                | 30                      | Pass         |
| 2.437           | 9.52                | 30                      | Pass         |
| 2.462           | 9.38                | 30                      | Pass         |

|                  |                          |
|------------------|--------------------------|
| <b>TEST ITEM</b> | OUTPUT POWER             |
| <b>TEST MODE</b> | 802.11g with data rate 6 |

| Frequency (GHz) | Average Power (dBm) | Applicable Limits (dBm) | Pass or Fail |
|-----------------|---------------------|-------------------------|--------------|
| 2.412           | 7.42                | 30                      | Pass         |
| 2.437           | 7.66                | 30                      | Pass         |
| 2.462           | 7.53                | 30                      | Pass         |

|                  |                               |
|------------------|-------------------------------|
| <b>TEST ITEM</b> | OUTPUT POWER                  |
| <b>TEST MODE</b> | 802.11n 20 with data rate 6.5 |

| Frequency (GHz) | Average Power (dBm) | Applicable Limits (dBm) | Pass or Fail |
|-----------------|---------------------|-------------------------|--------------|
| 2.412           | 7.26                | 30                      | Pass         |
| 2.437           | 7.41                | 30                      | Pass         |
| 2.462           | 7.38                | 30                      | Pass         |

|           |                               |
|-----------|-------------------------------|
| TEST ITEM | OUTPUT POWER                  |
| TEST MODE | 802.11n 40 with data rate 6.5 |

| Frequency<br>(GHz) | Average Power<br>(dBm) | Applicable Limits<br>(dBm) | Pass or Fail |
|--------------------|------------------------|----------------------------|--------------|
| 2.422              | 4.26                   | 30                         | Pass         |
| 2.437              | 4.15                   | 30                         | Pass         |
| 2.452              | 4.18                   | 30                         | Pass         |


## 8. 6 DB BANDWIDTH

### 8.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW $\geq 3 \times$  RBW.
4. Set SPA Trace 1 Max hold, then View.

**Note:** The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

### 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

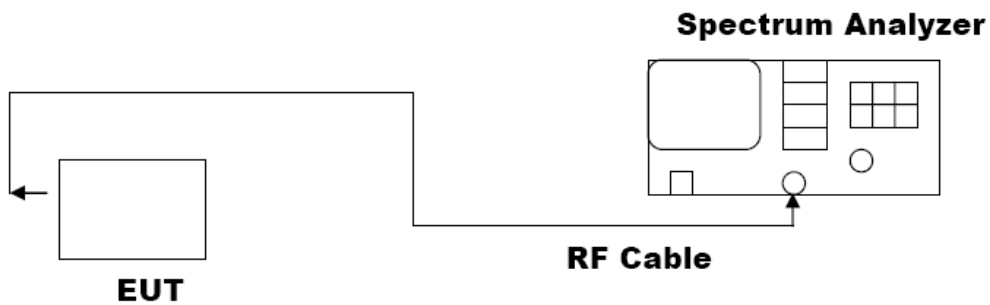

### 8.3. LIMITS AND MEASUREMENT RESULTS

|                  |                           |
|------------------|---------------------------|
| <b>TEST ITEM</b> | 6DB BANDWIDTH             |
| <b>TEST MODE</b> | 802.11b with data rate 11 |

| LIMITS AND MEASUREMENT RESULT |                   |       |          |
|-------------------------------|-------------------|-------|----------|
| Applicable Limits             | Applicable Limits |       |          |
|                               | Test Data (MHz)   |       | Criteria |
| >500KHZ                       | Low Channel       | 10.10 | PASS     |
|                               | Middle Channel    | 10.10 | PASS     |
|                               | High Channel      | 10.09 | PASS     |

|                  |                           |
|------------------|---------------------------|
| <b>TEST ITEM</b> | 6DB BANDWIDTH             |
| <b>TEST MODE</b> | 802.11g with data rate 54 |

| LIMITS AND MEASUREMENT RESULT |                   |       |          |
|-------------------------------|-------------------|-------|----------|
| Applicable Limits             | Applicable Limits |       |          |
|                               | Test Data (MHz)   |       | Criteria |
| >500KHZ                       | Low Channel       | 16.38 | PASS     |
|                               | Middle Channel    | 16.38 | PASS     |
|                               | High Channel      | 16.38 | PASS     |

|                  |                              |
|------------------|------------------------------|
| <b>TEST ITEM</b> | 6DB BANDWIDTH                |
| <b>TEST MODE</b> | 802.11n 20 with data rate 65 |

| LIMITS AND MEASUREMENT RESULT |                   |       |          |
|-------------------------------|-------------------|-------|----------|
| Applicable Limits             | Applicable Limits |       |          |
|                               | Test Data (MHz)   |       | Criteria |
| >500KHZ                       | Low Channel       | 17.63 | PASS     |
|                               | Middle Channel    | 17.62 | PASS     |
|                               | High Channel      | 17.61 | PASS     |




|           |                              |
|-----------|------------------------------|
| TEST ITEM | 6DB BANDWIDTH                |
| TEST MODE | 802.11n 40 with data rate 65 |


| LIMITS AND MEASUREMENT RESULT |                   |       |          |
|-------------------------------|-------------------|-------|----------|
| Applicable Limits             | Applicable Limits |       |          |
|                               | Test Data (MHz)   |       | Criteria |
| >500KHZ                       | Low Channel       | 36.12 | PASS     |
|                               | Middle Channel    | 36.05 | PASS     |
|                               | High Channel      | 36.28 | PASS     |

802.11b TEST RESULT


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

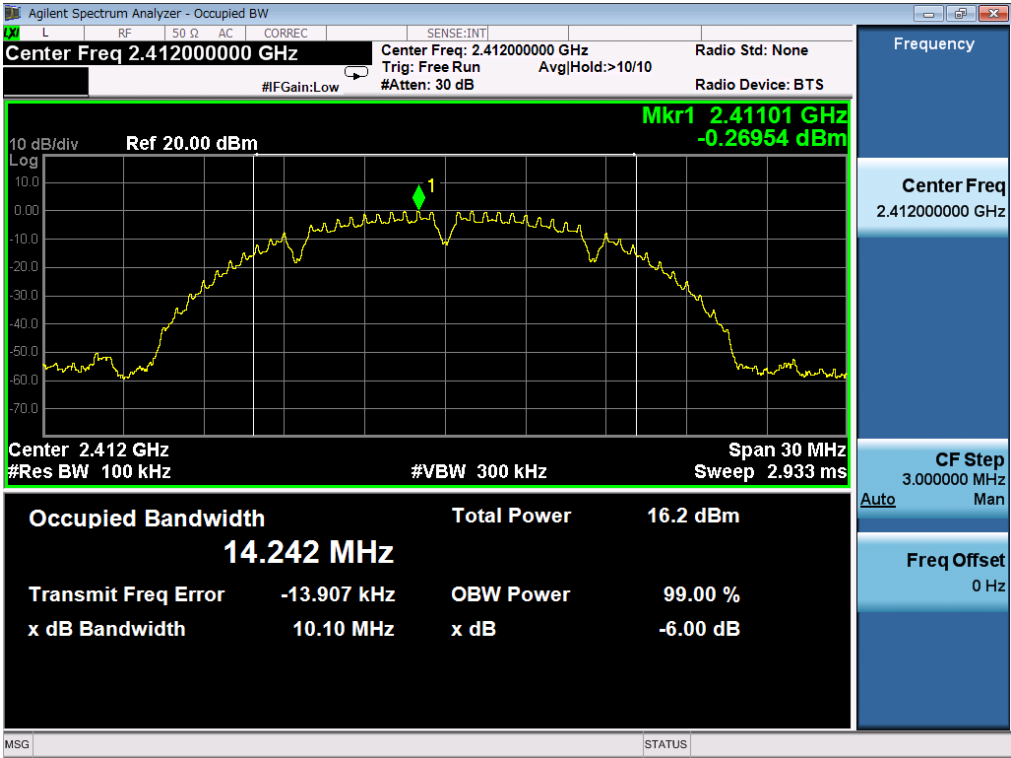

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

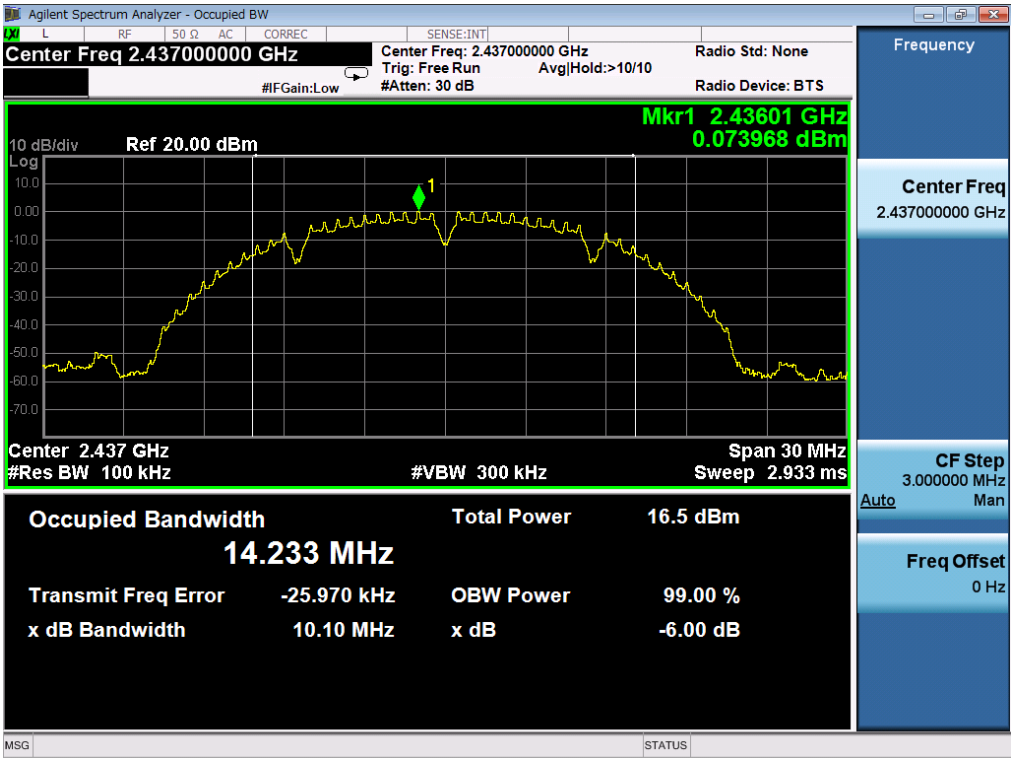


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

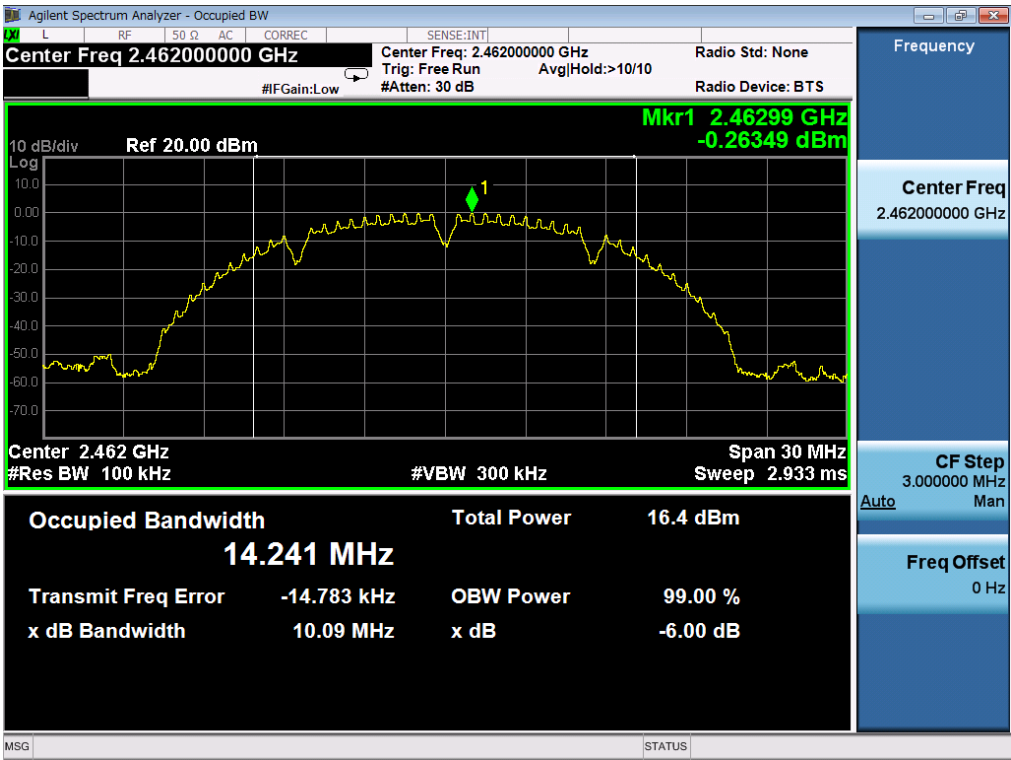


802.11g TEST RESULT


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

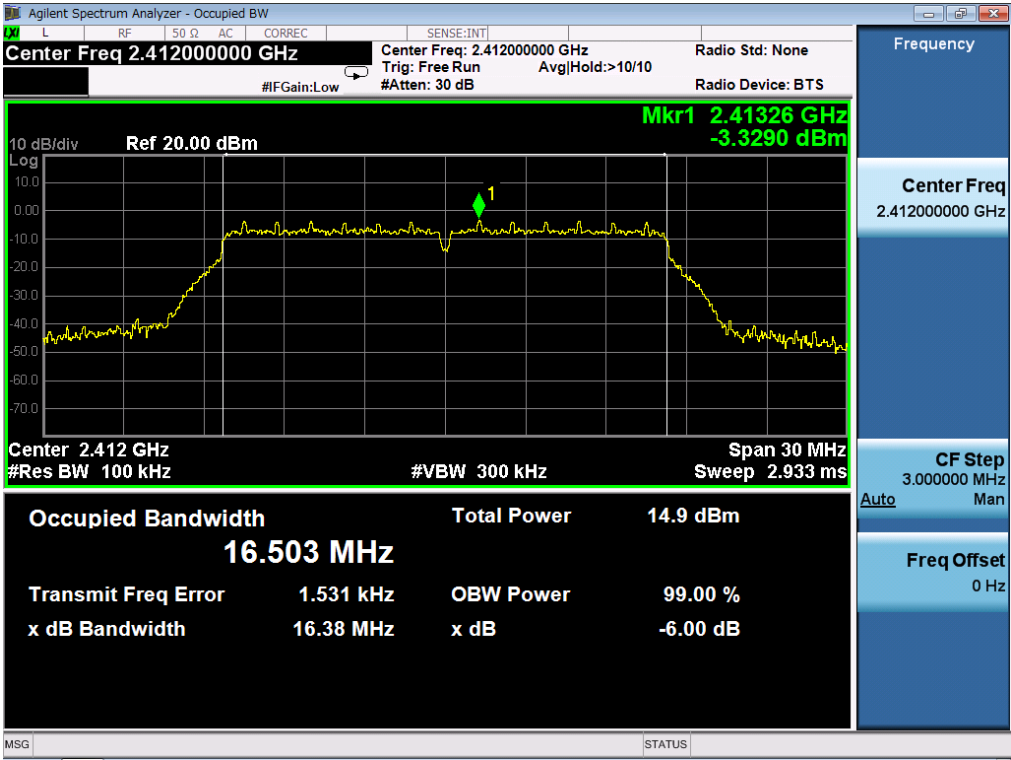

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

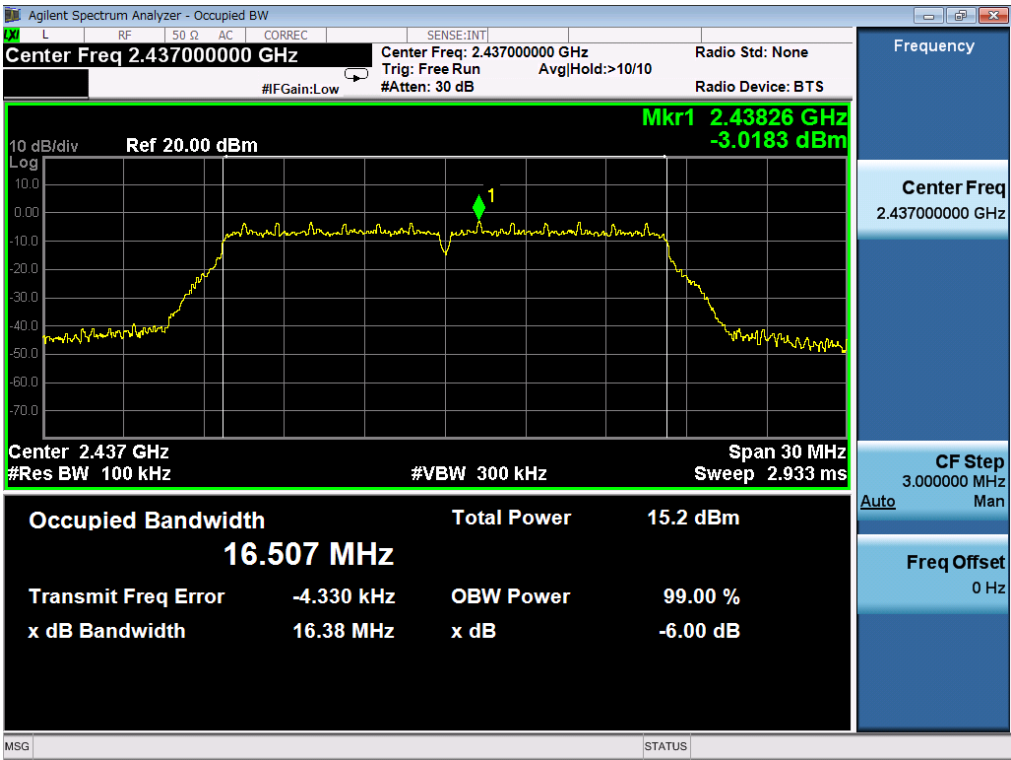


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

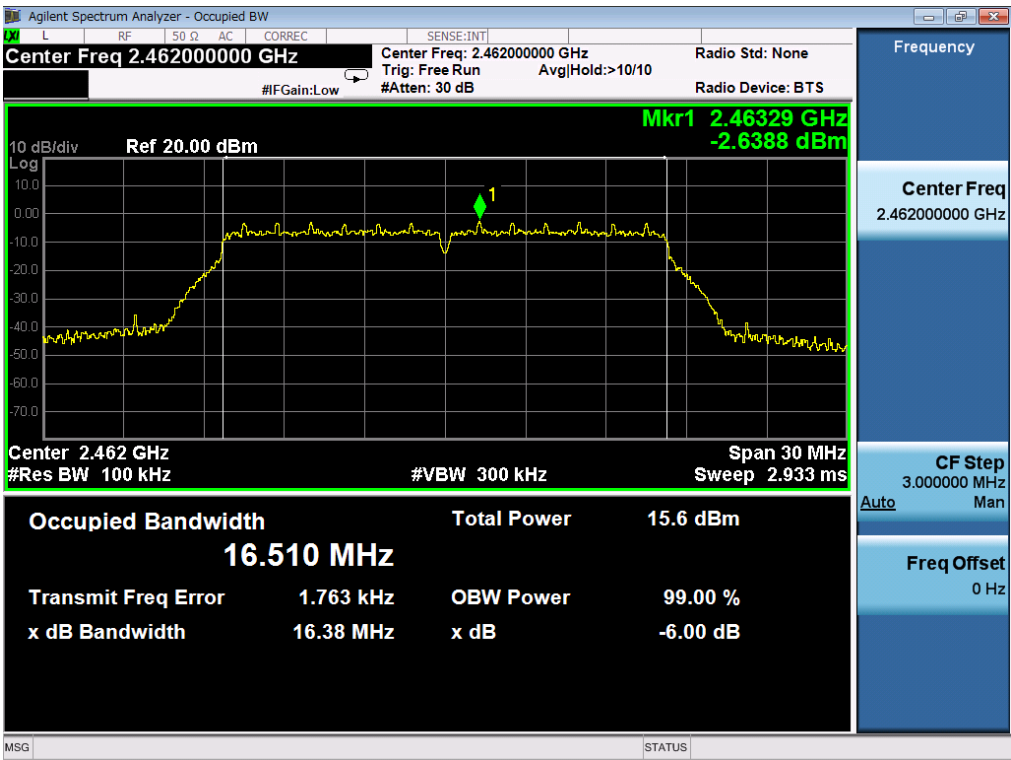


802.11n (20) TEST RESULT


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

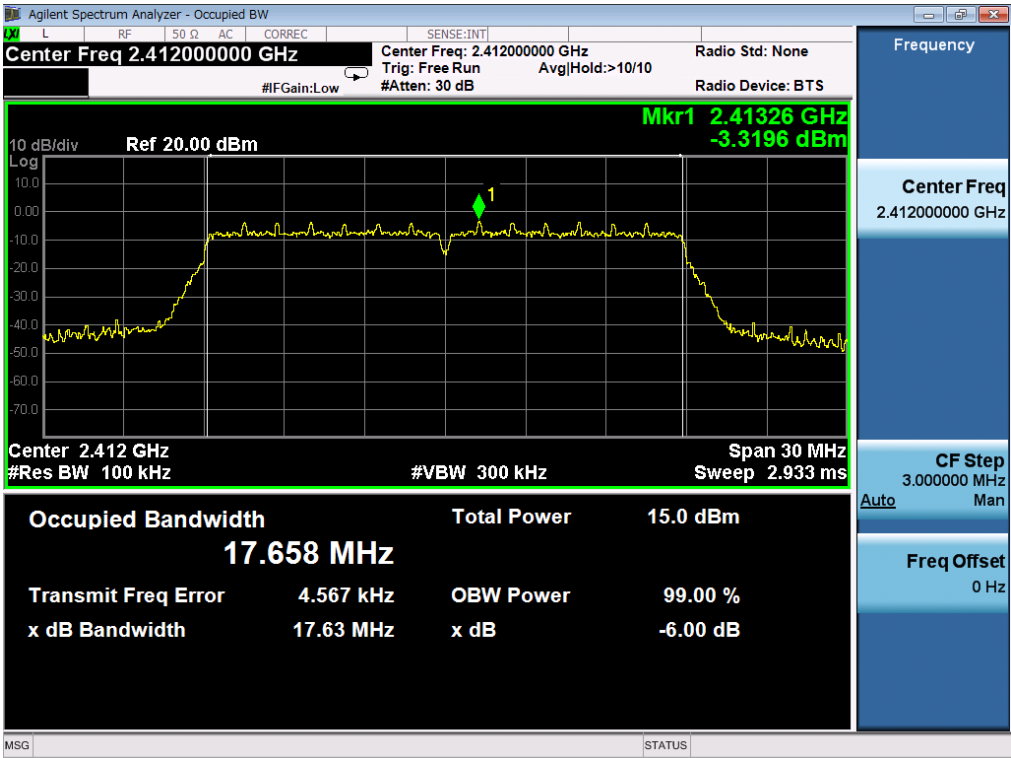

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

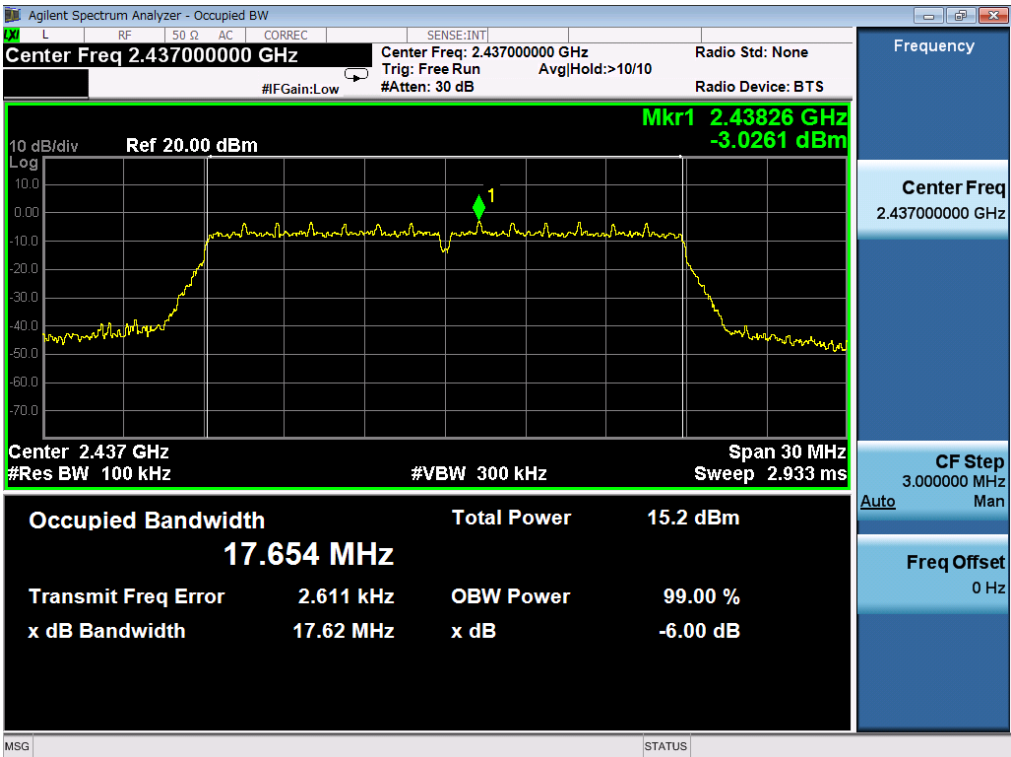


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

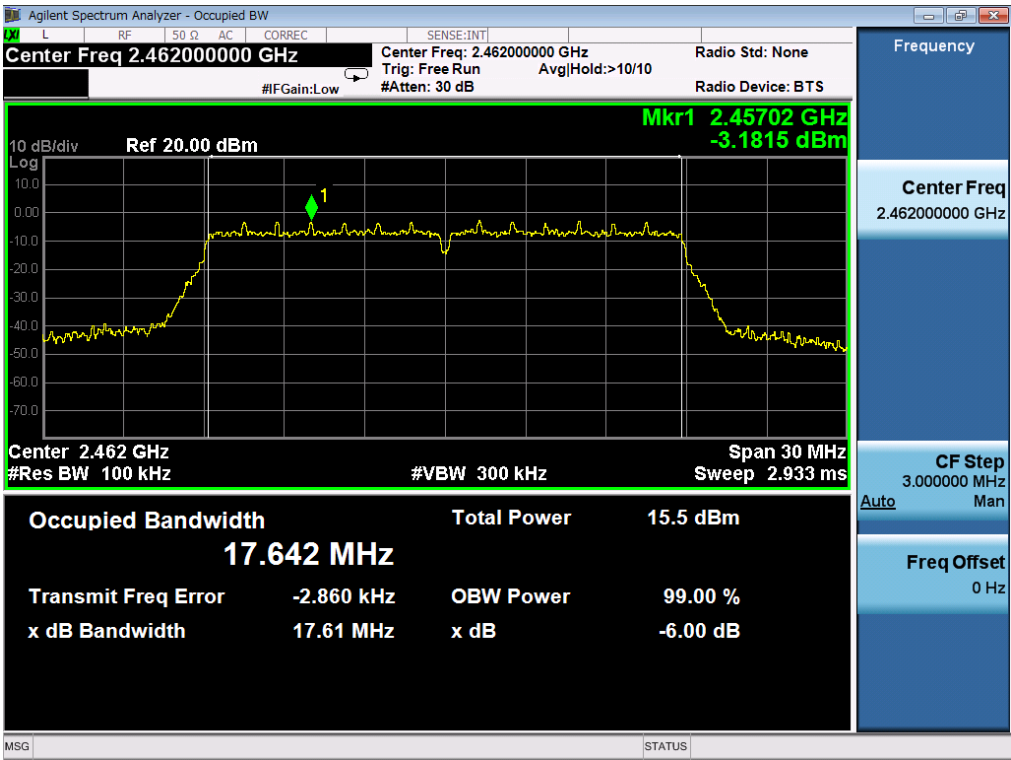


802.11n (40) TEST RESULT


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

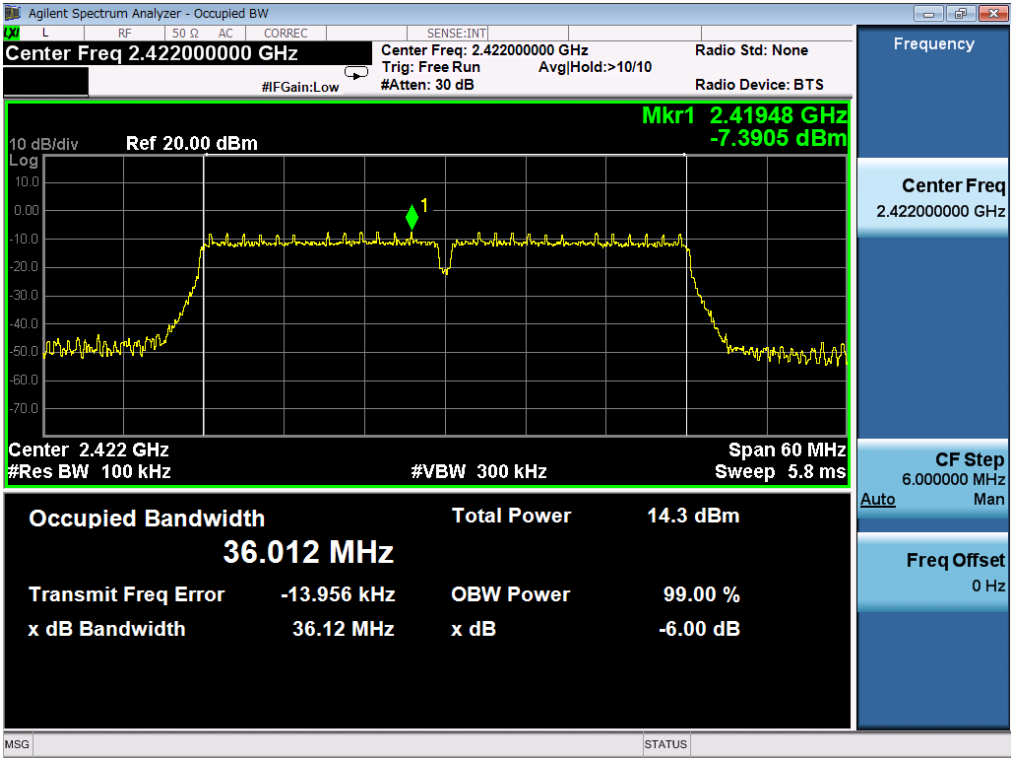

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

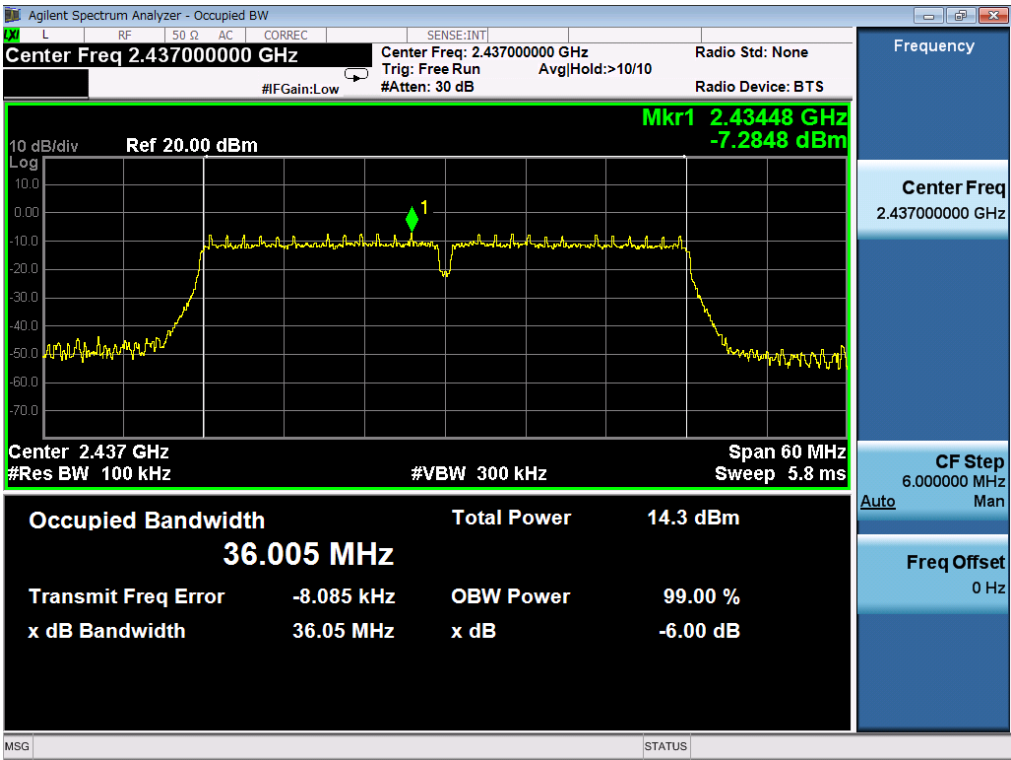

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

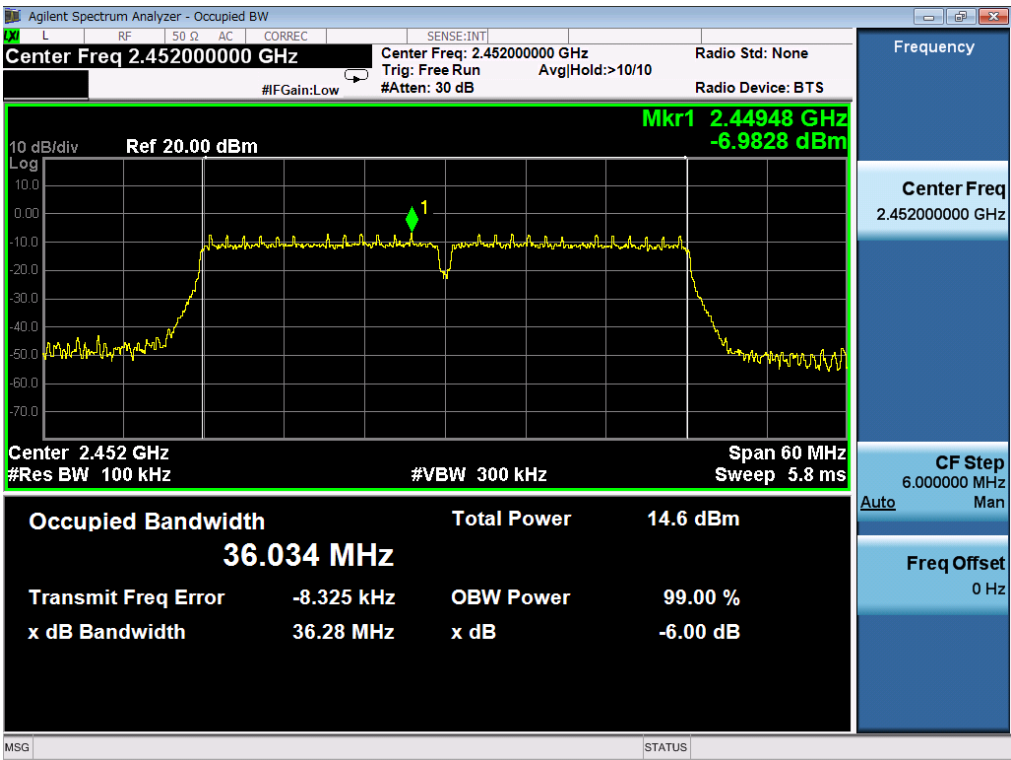

## 9. CONDUCTED SPURIOUS EMISSION

### 9.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Trace 1 Max hold, then View.

**Note:** The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

Owing to satisfy the requirements of the number of measurement points, we set the RBW=1MHz, VBW > RBW, scan up through 10th harmonic, and consider the tested results as the worst case, if the tested results conform to the requirement, we can deem that the real tested results(set the RBW=100KHz, VBW > RBW) are conform to the requirement.

### 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2.

### 9.3. MEASUREMENT EQUIPMENT USED


The same as described in section 6.


### 9.4. LIMITS AND MEASUREMENT RESULT

| LIMITS AND MEASUREMENT RESULT   |  |          |
|---|--|----------|
| Applicable Limits   | Measurement Result   |          |
|   | Test Data  | Criteria |
| In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.<br>In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a)) | At least -20dBc than the limit Specified on the BOTTOM Channel | PASS     |
|   | At least -20dBc than the limit Specified on the TOP Channel    | PASS     |






TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE  
OF 802.11b FOR MODULATION IN LOW CHANNEL

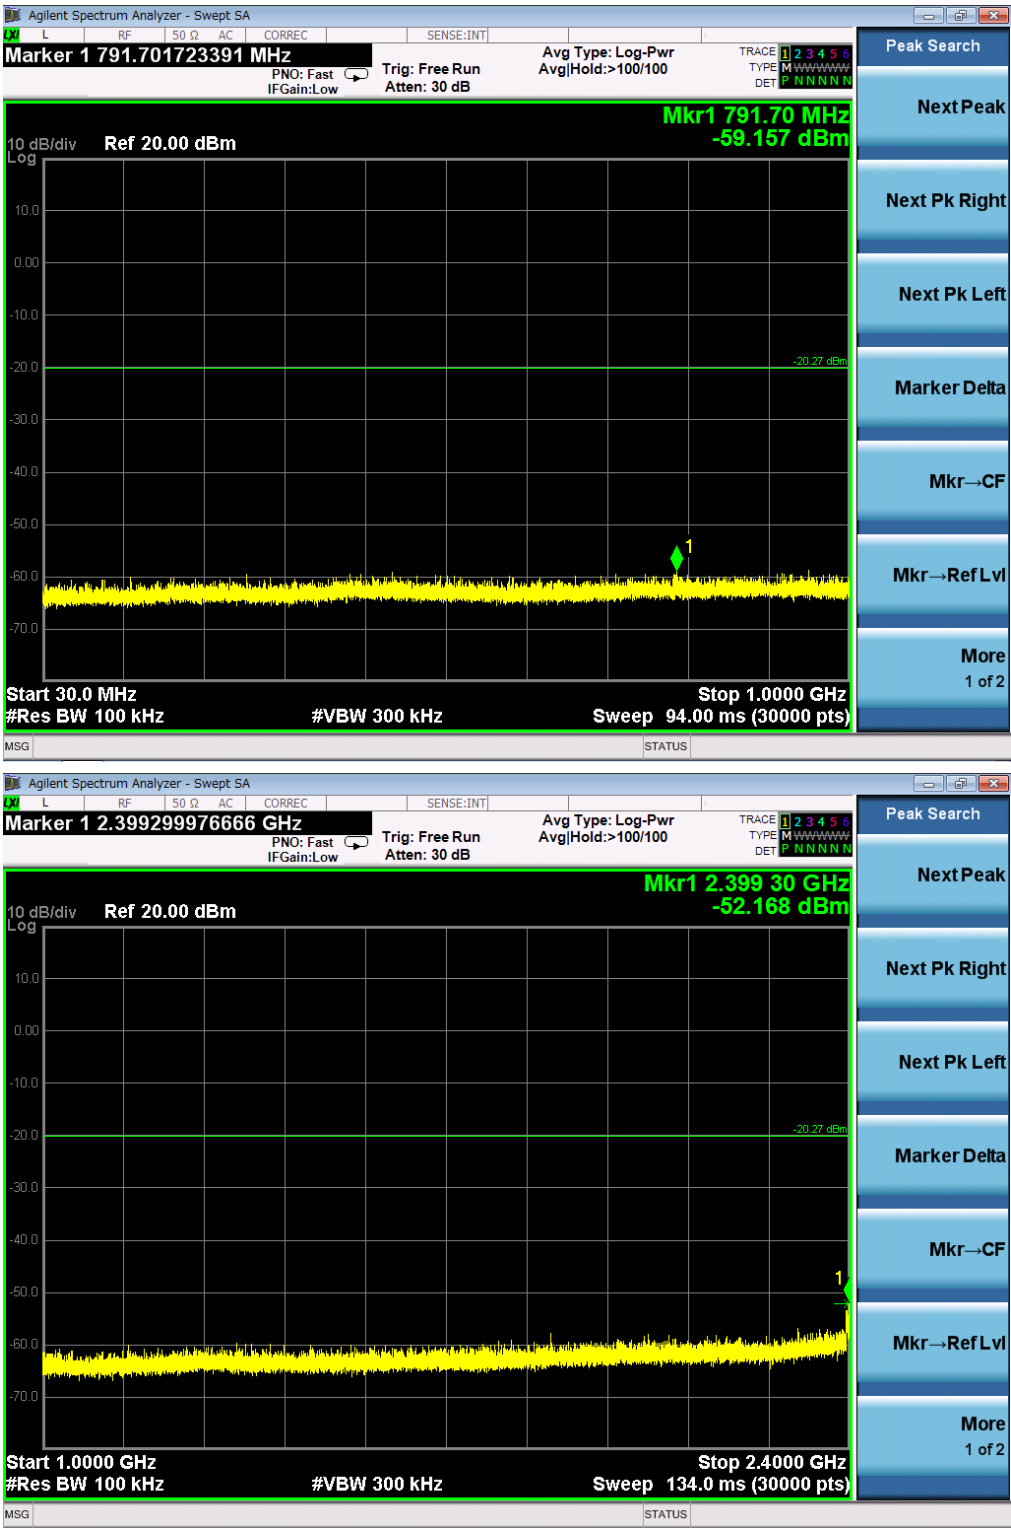

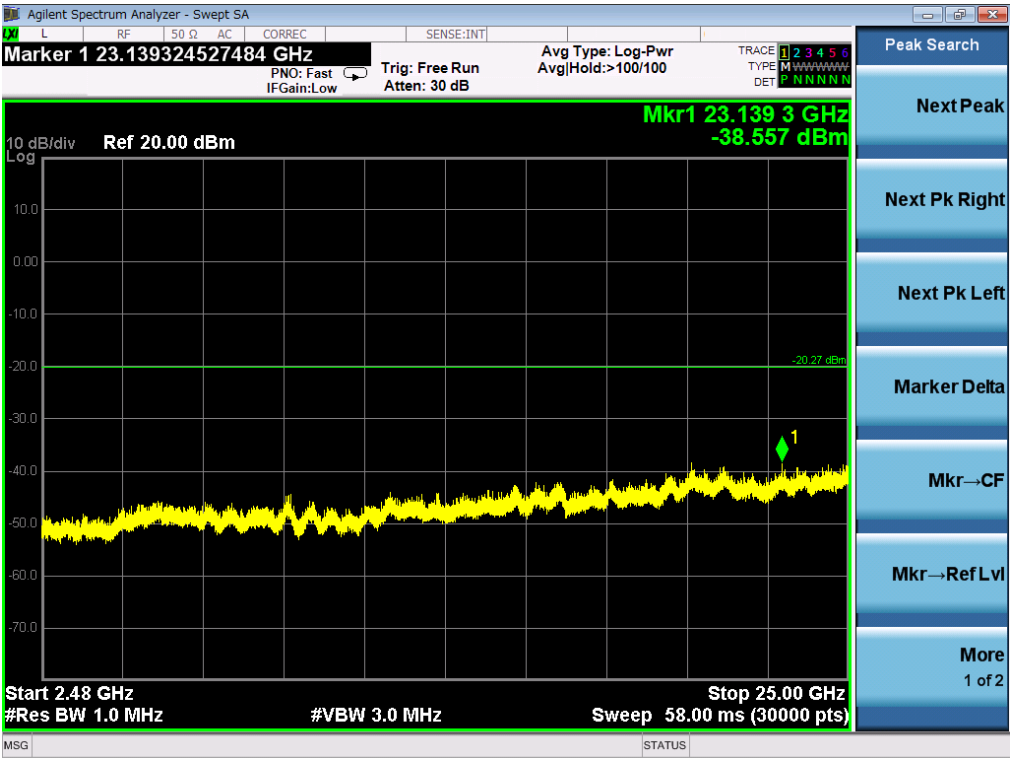



TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE  
OF 802.11b FOR MODULATION IN MIDDLE CHANNEL

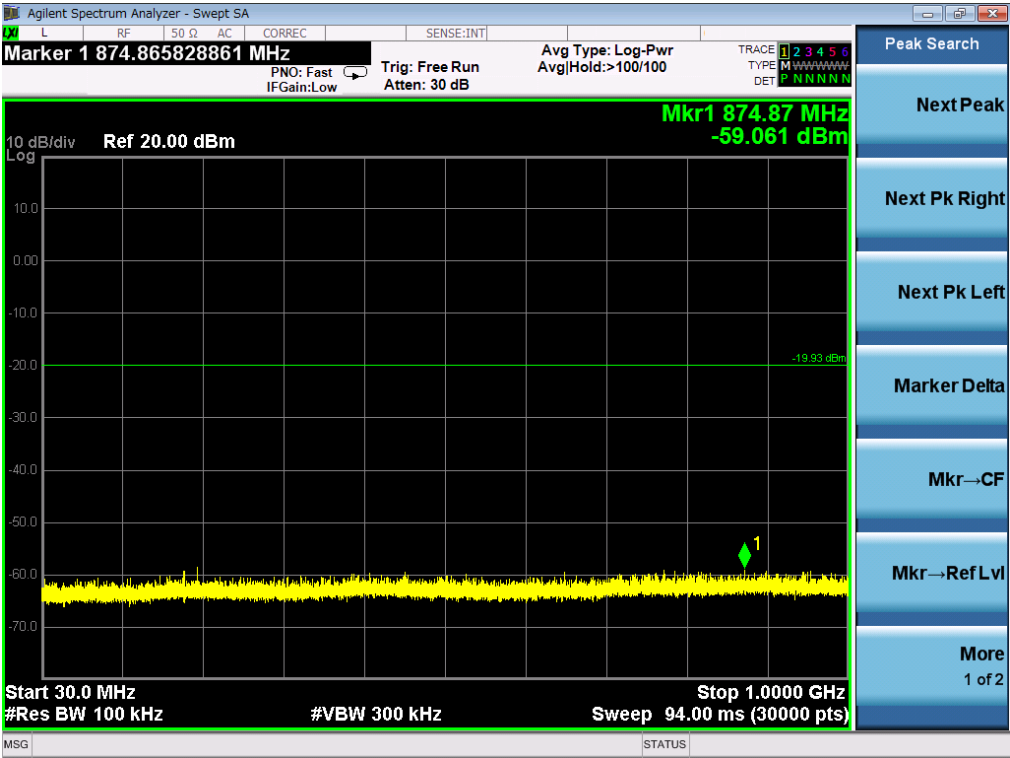

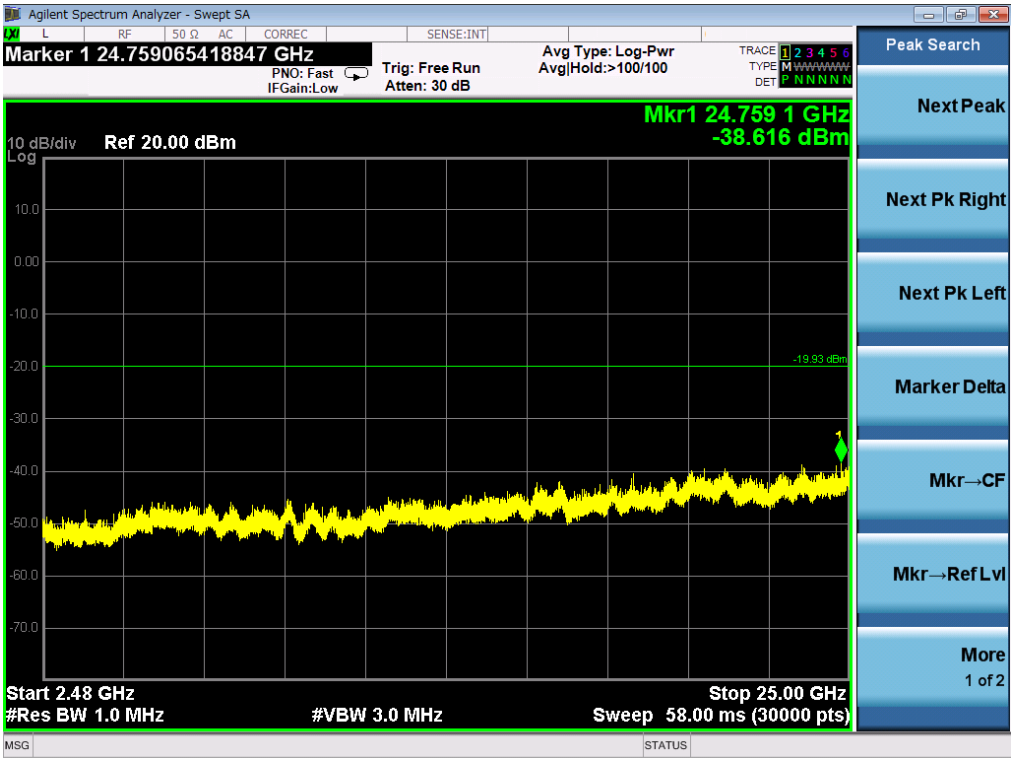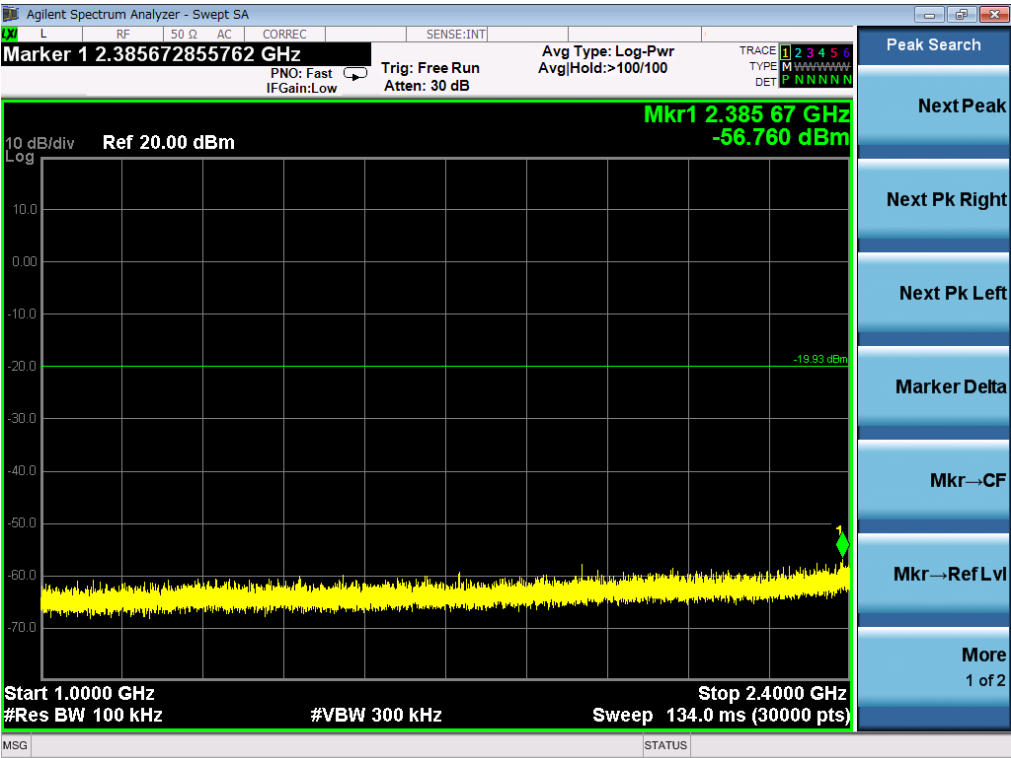




TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE  
OF 802.11b FOR MODULATION IN HIGH CHANNEL

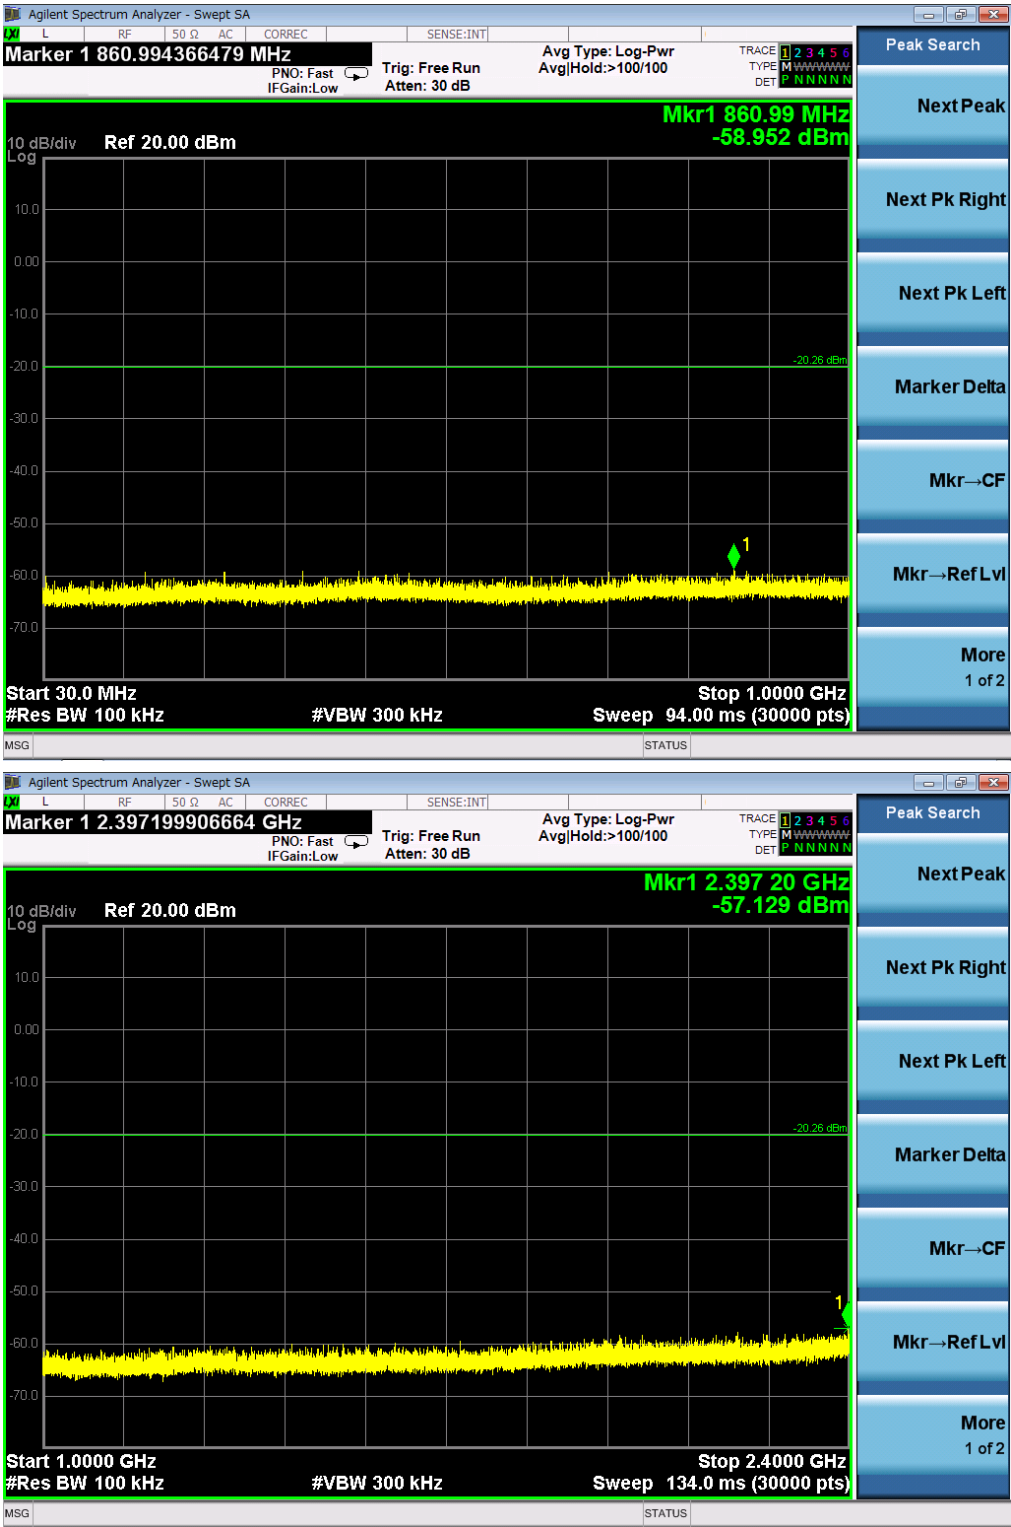

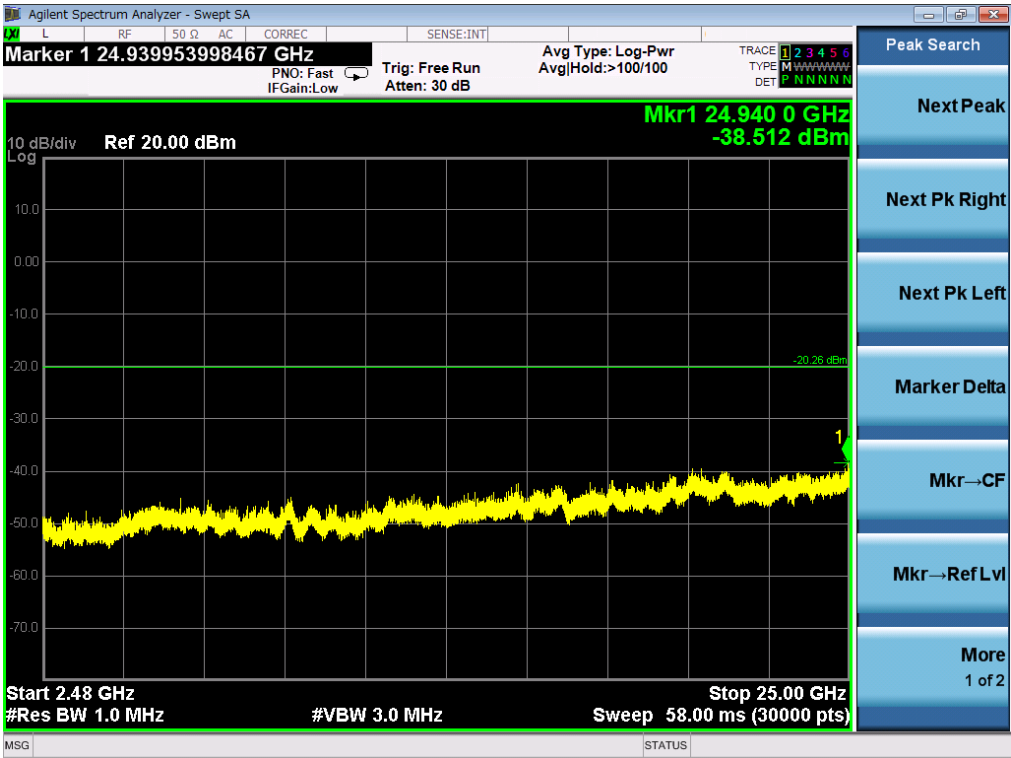



TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF 802.11g FOR MODULATION IN LOW CHANNEL

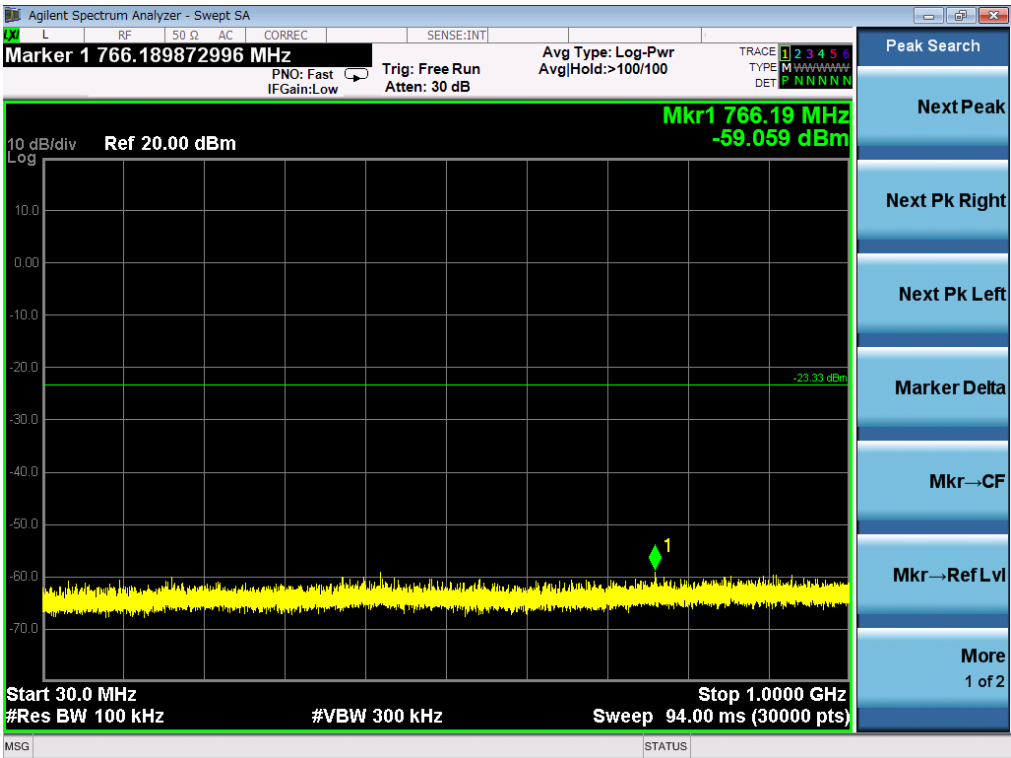

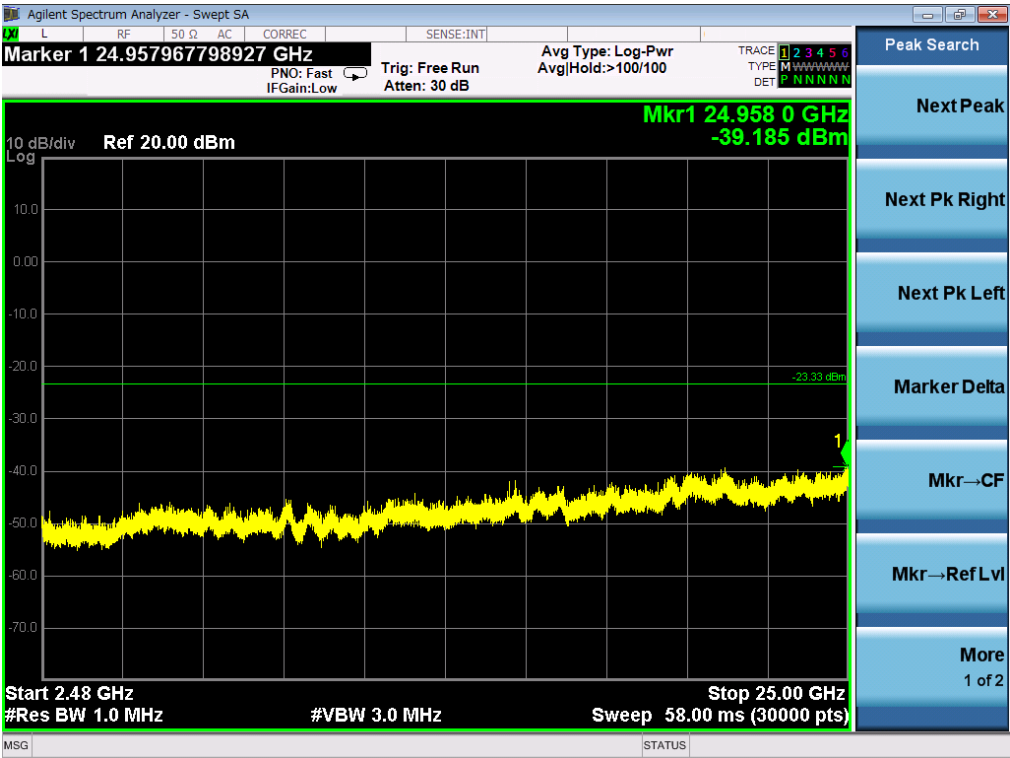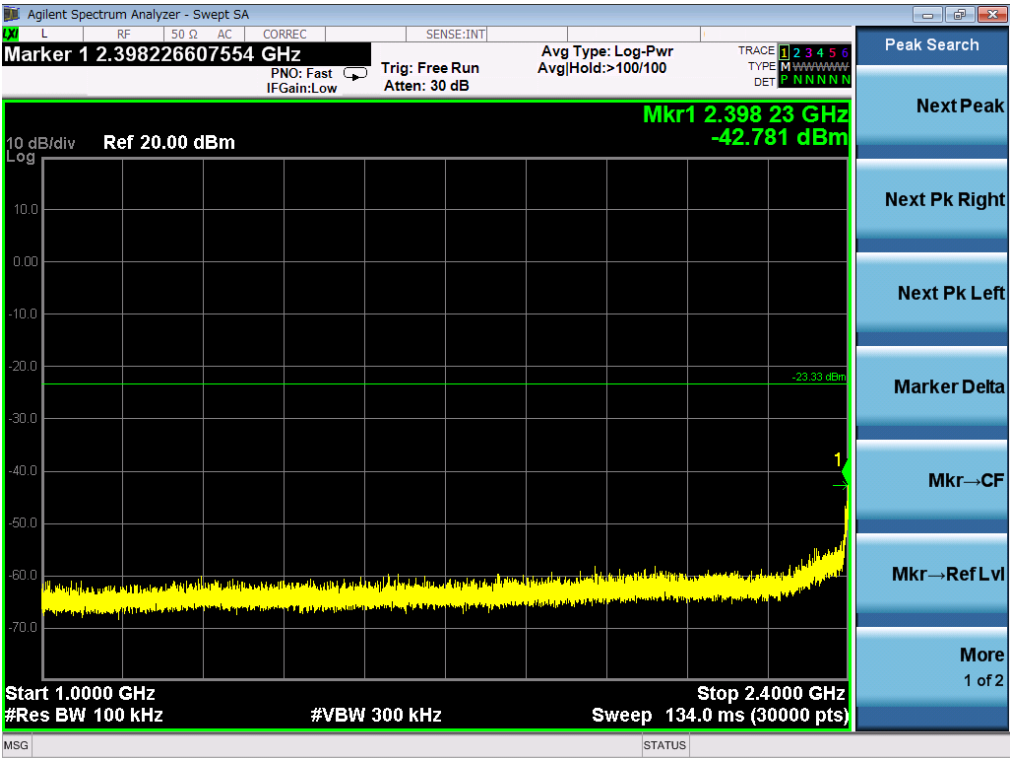


TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE  
OF 802.11g FOR MODULATION IN MIDDLE CHANNEL


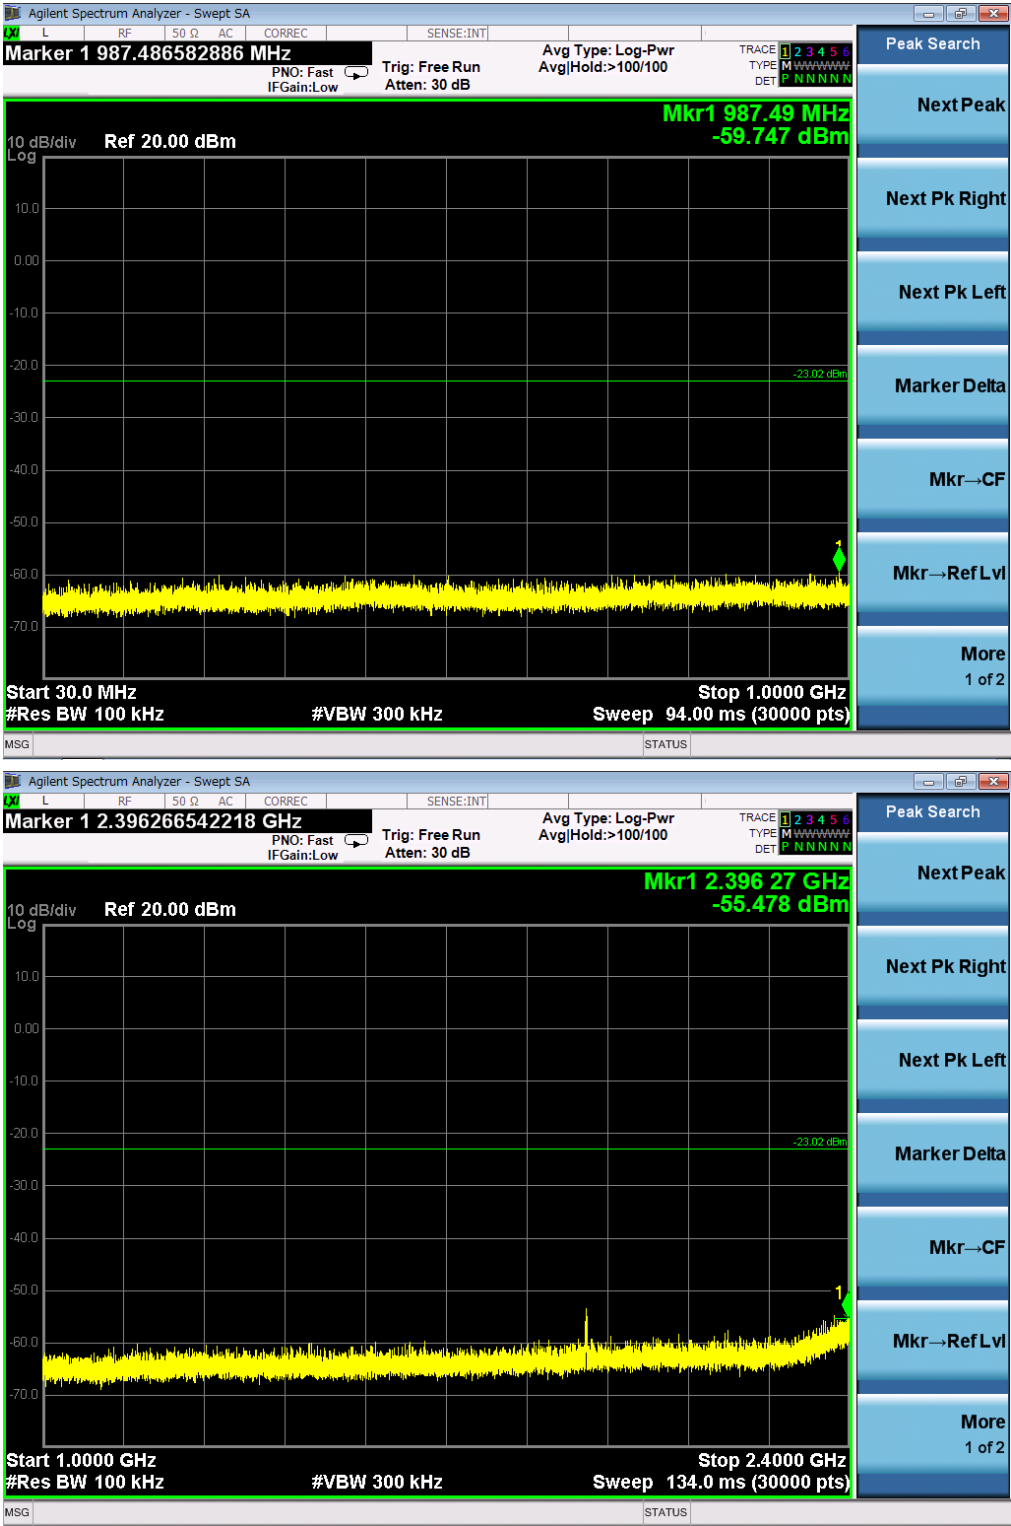


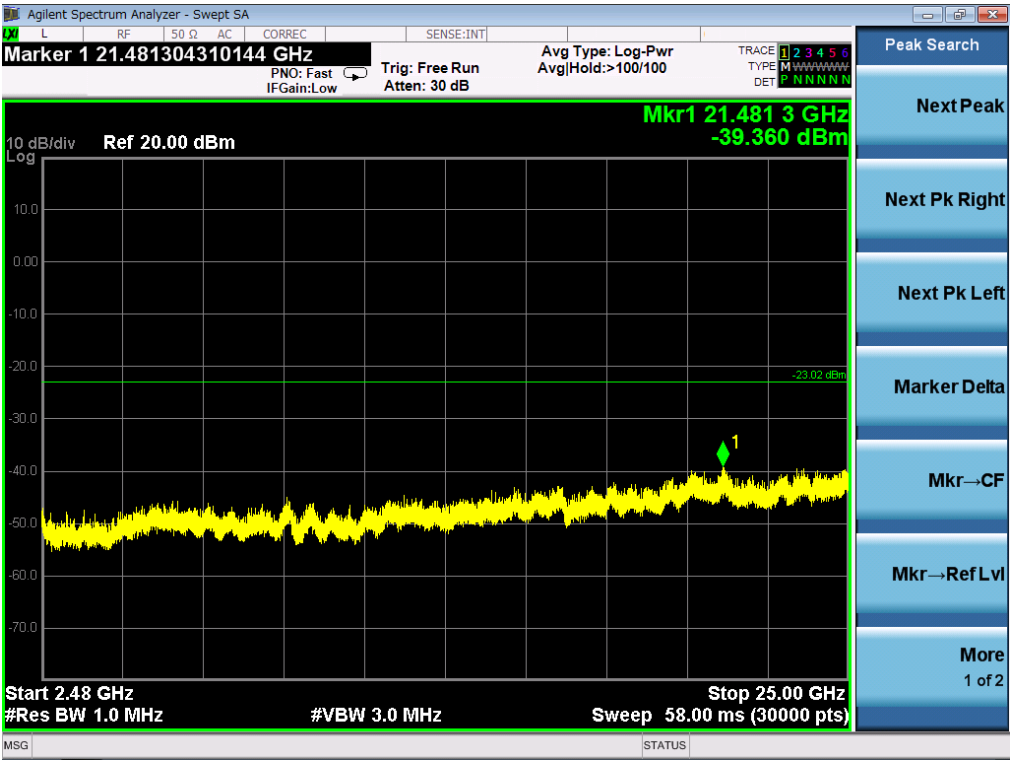

TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE  
OF 802.11g FOR MODULATION IN HIGH CHANNEL

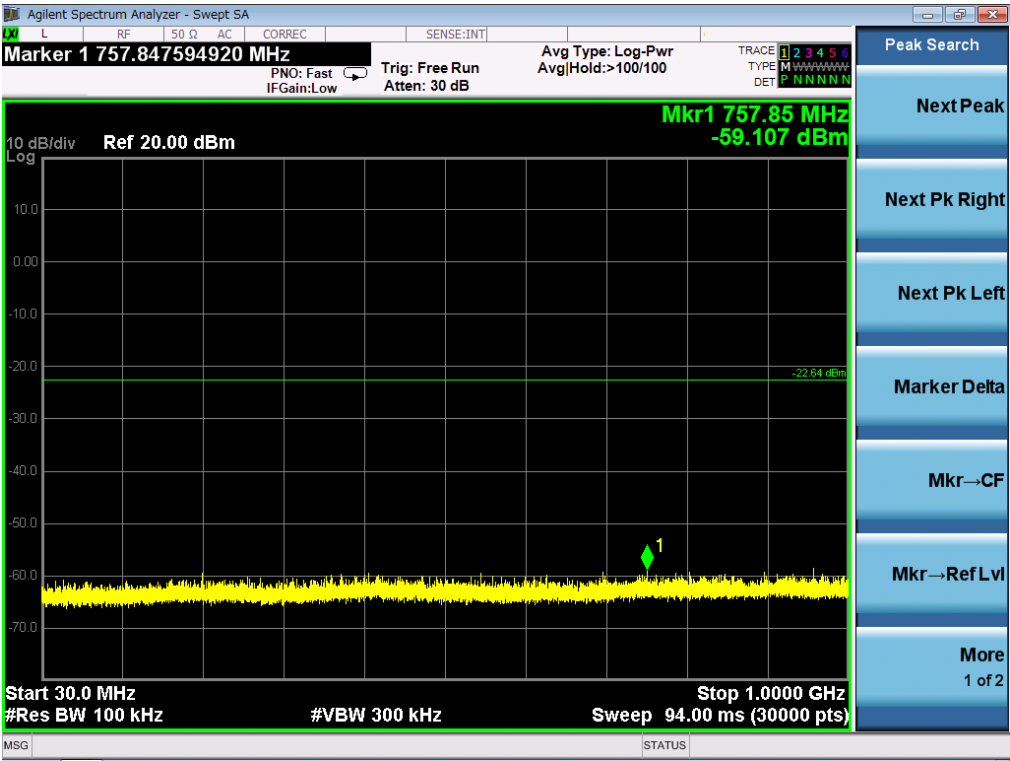




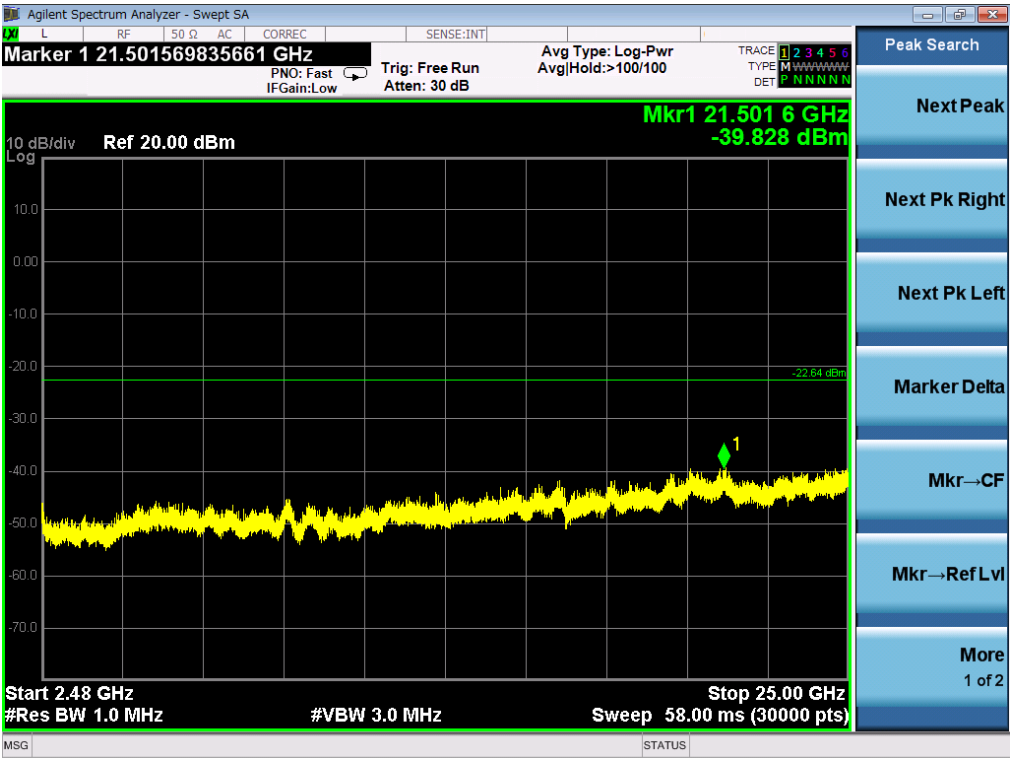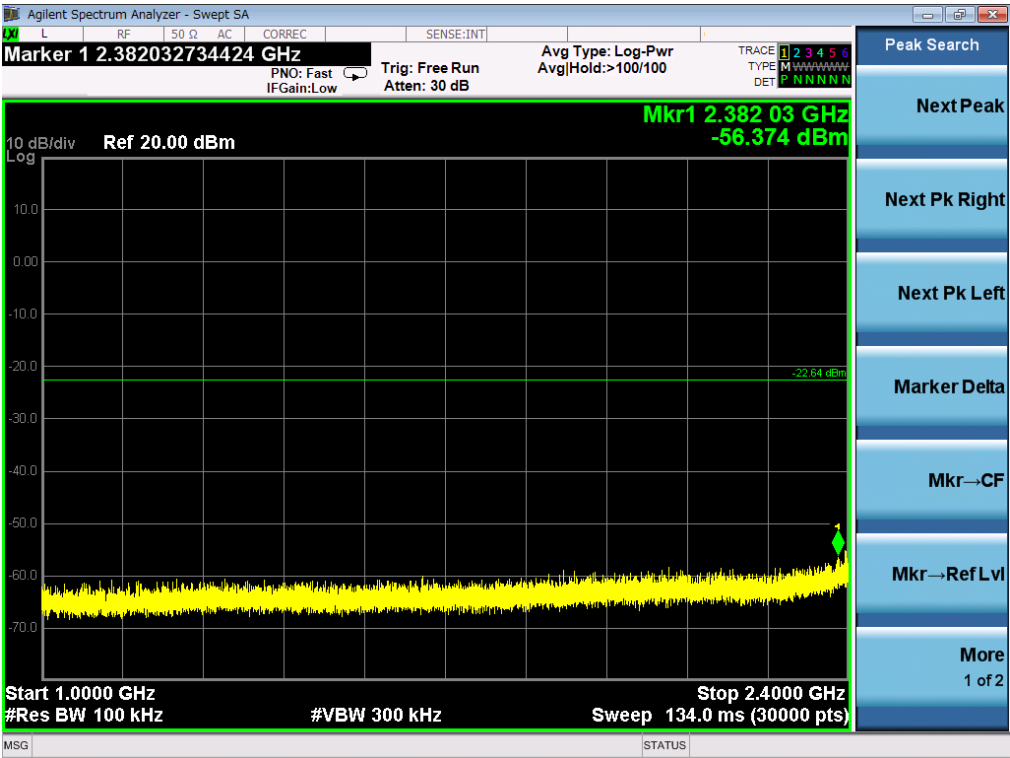




TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE  
OF 802.11n20 FOR MODULATION IN LOW CHANNEL



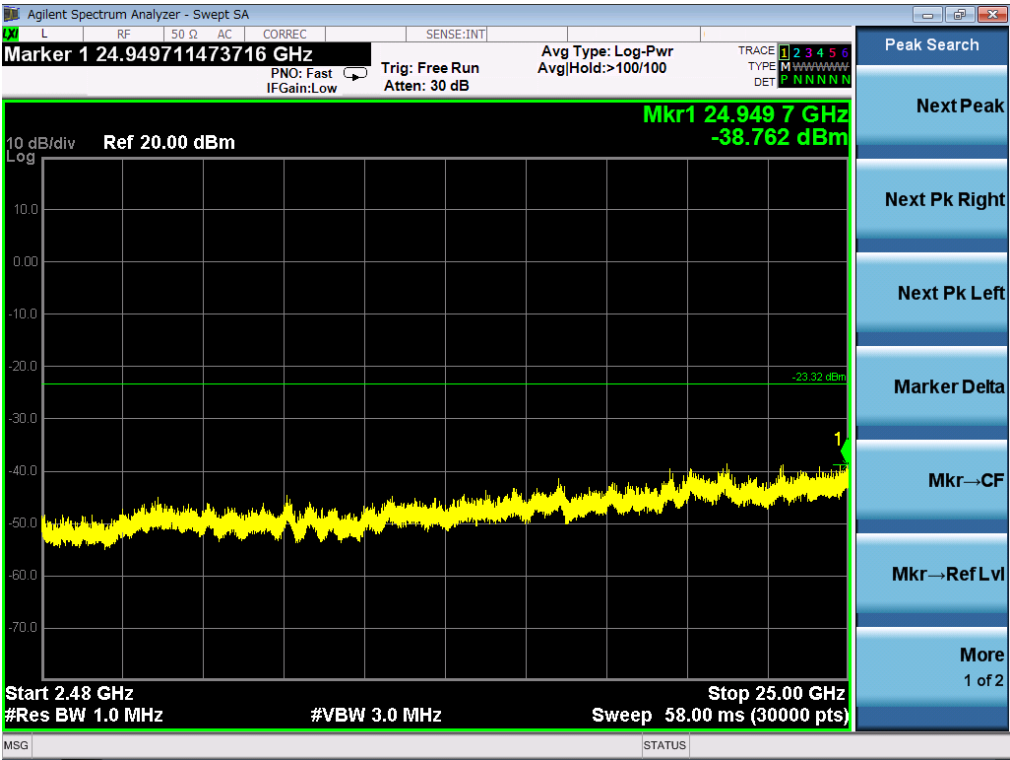


TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE  
OF 802.11n20 FOR MODULATION IN MIDDLE CHANNEL

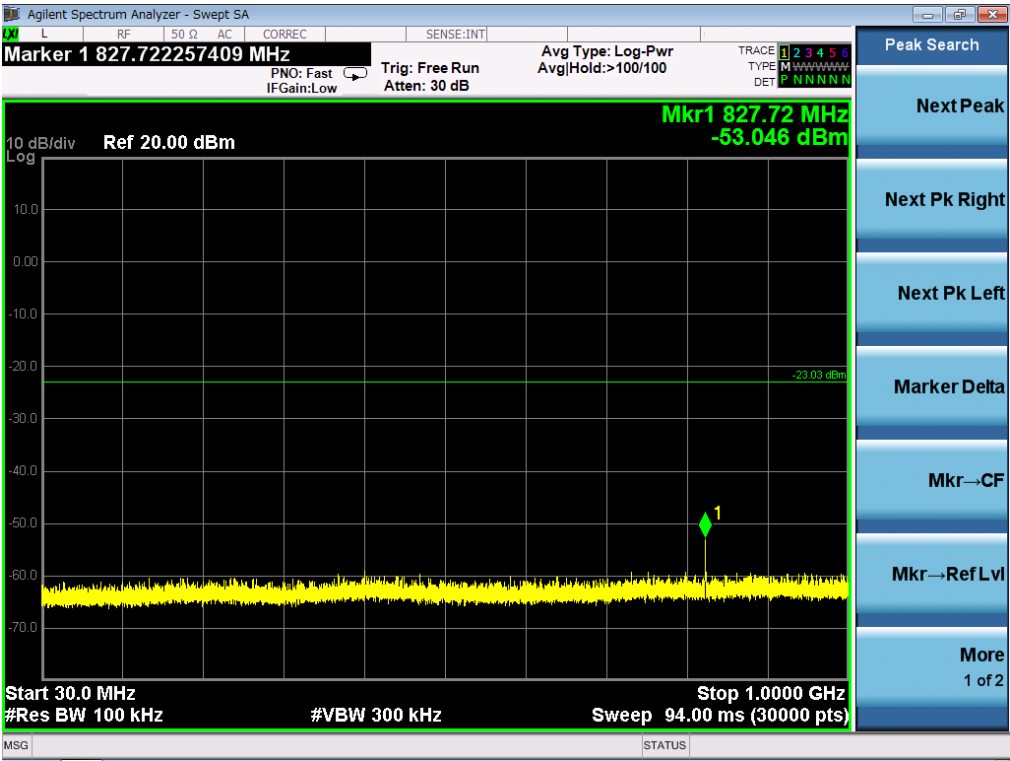

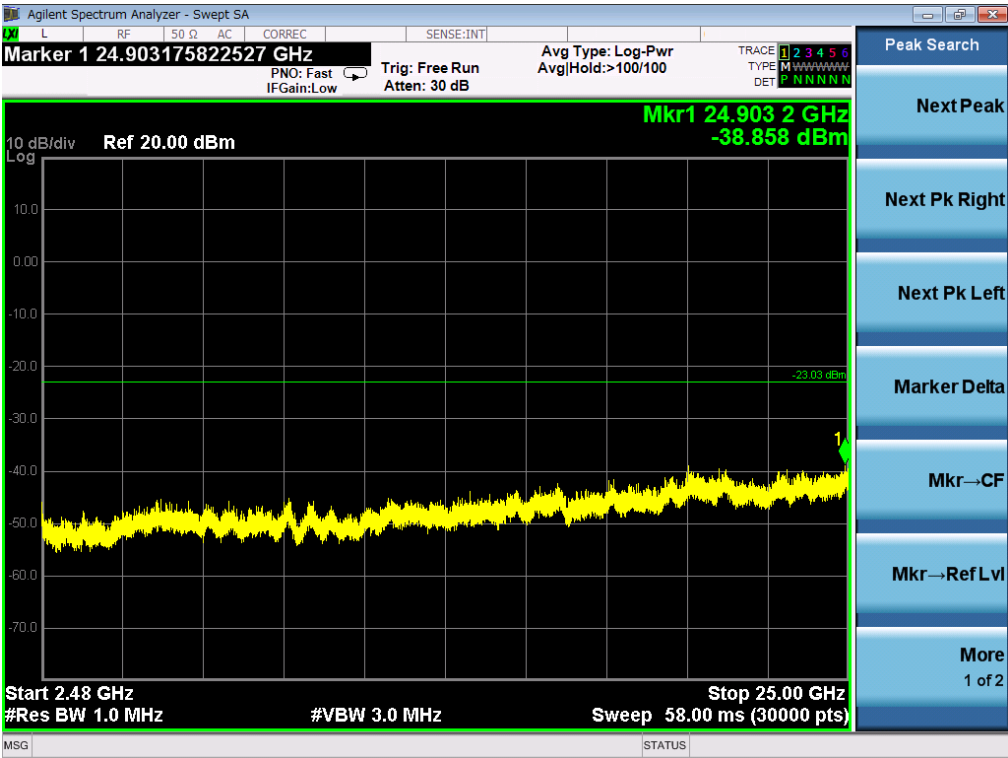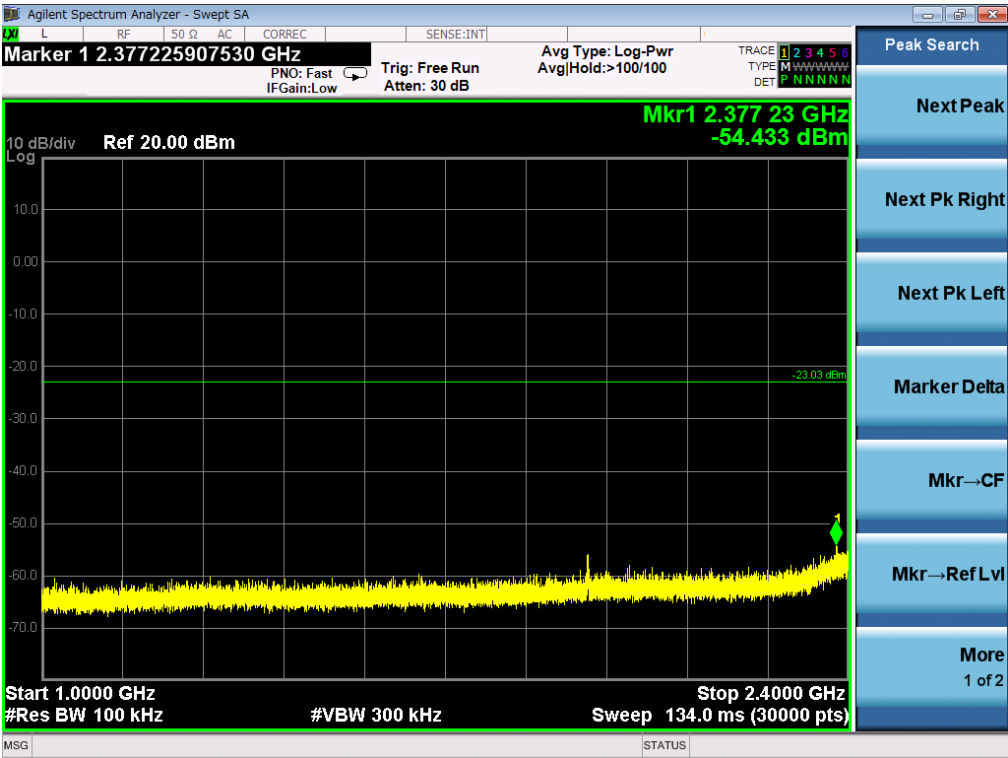




TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE  
OF 802.11n20 FOR MODULATION IN HIGH CHANNEL



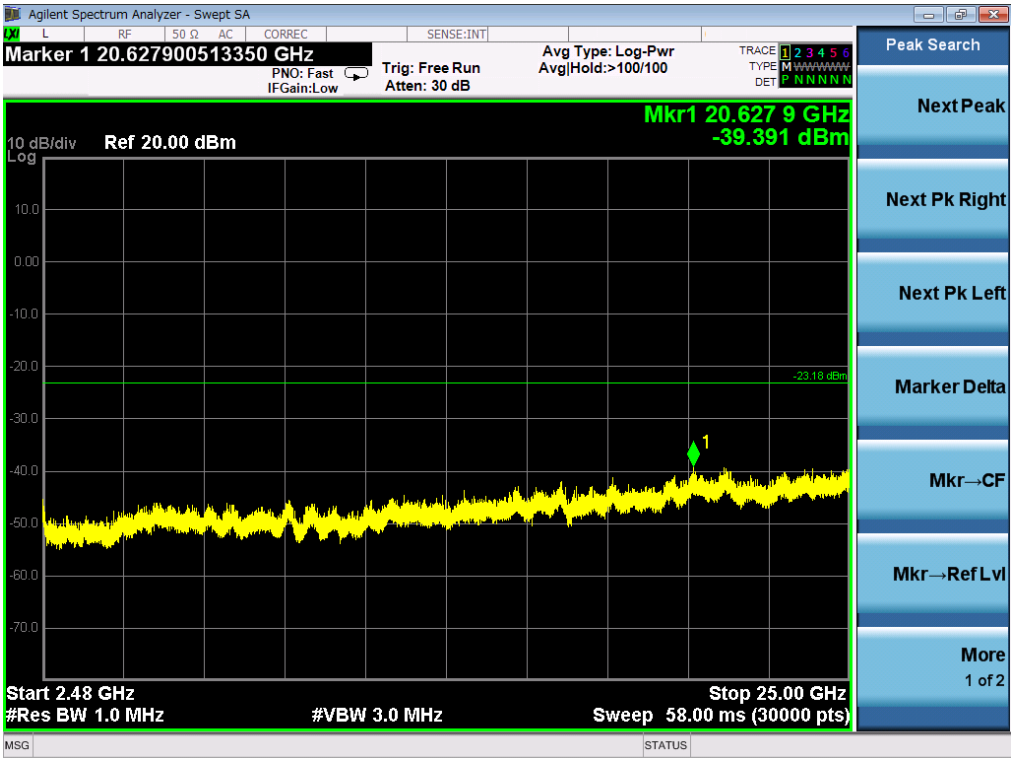


TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF 802.11n40 FOR MODULATION IN LOW CHANNEL

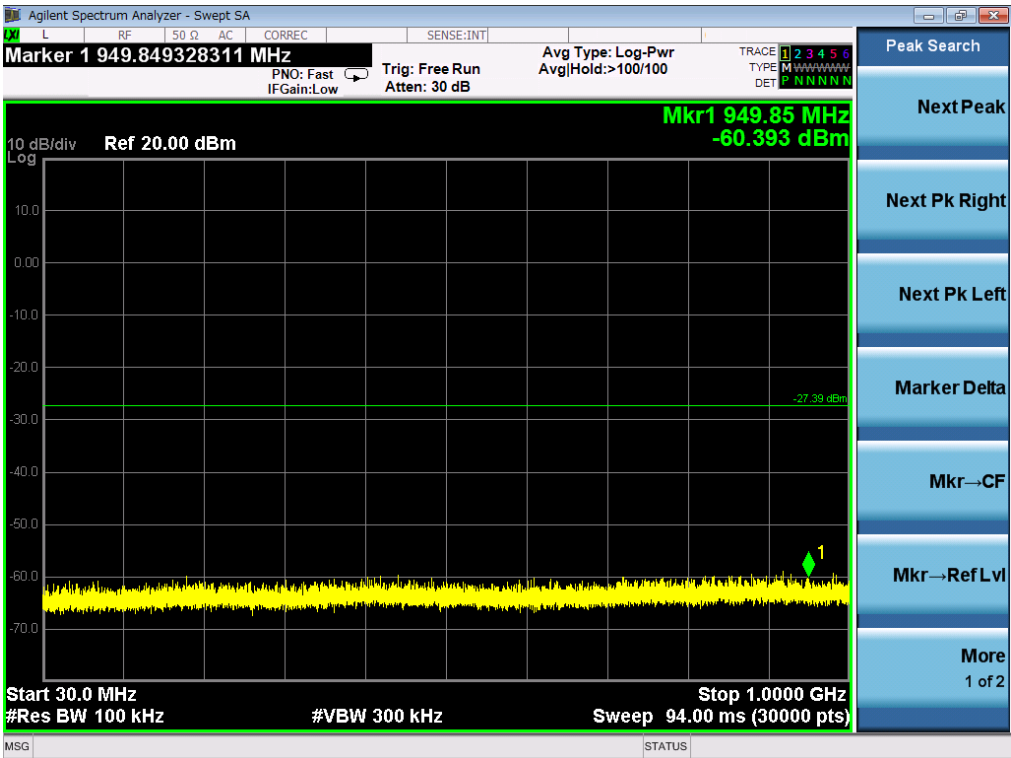


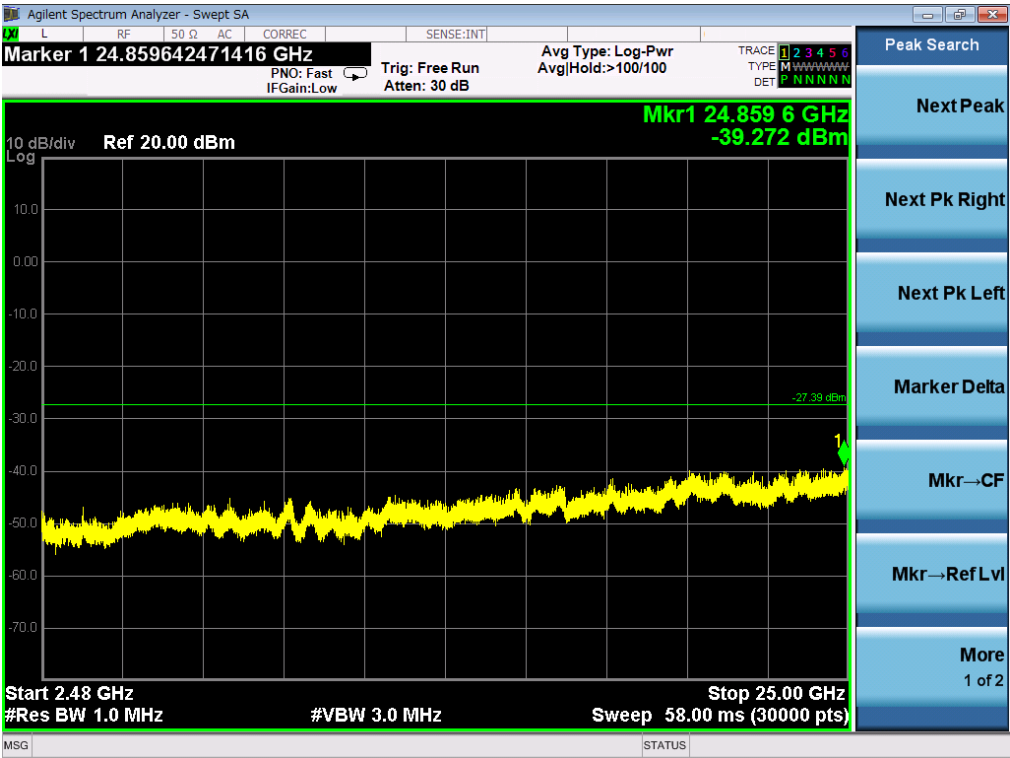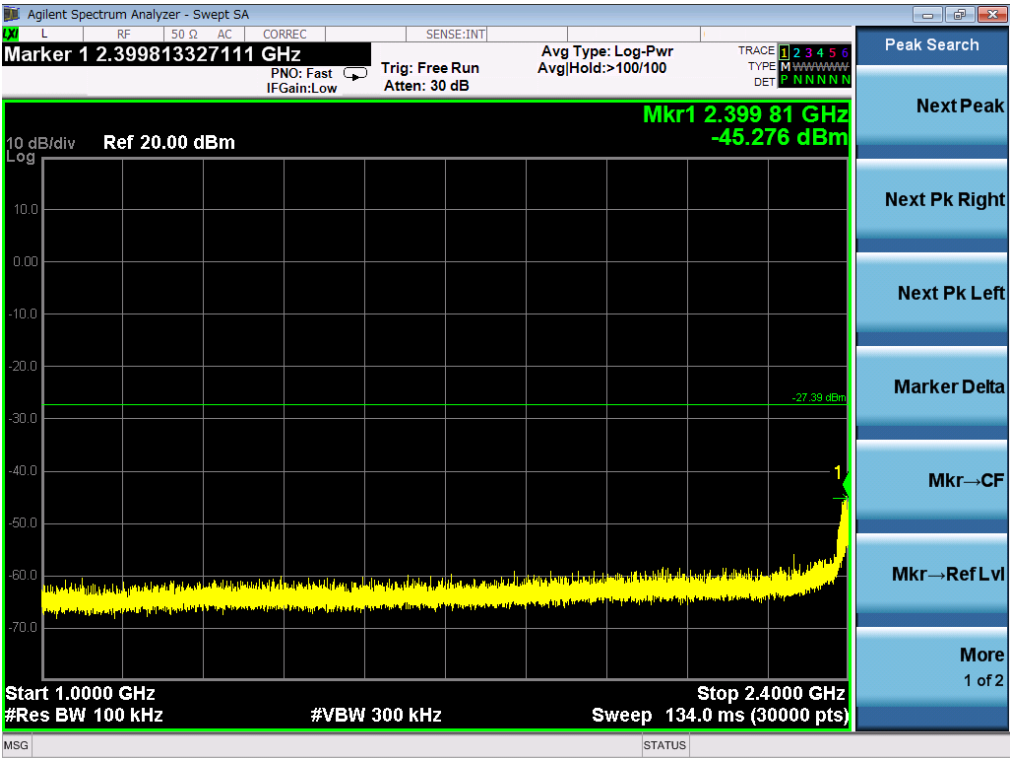


TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE  
OF 802.11n40 FOR MODULATION IN MIDDLE CHANNEL

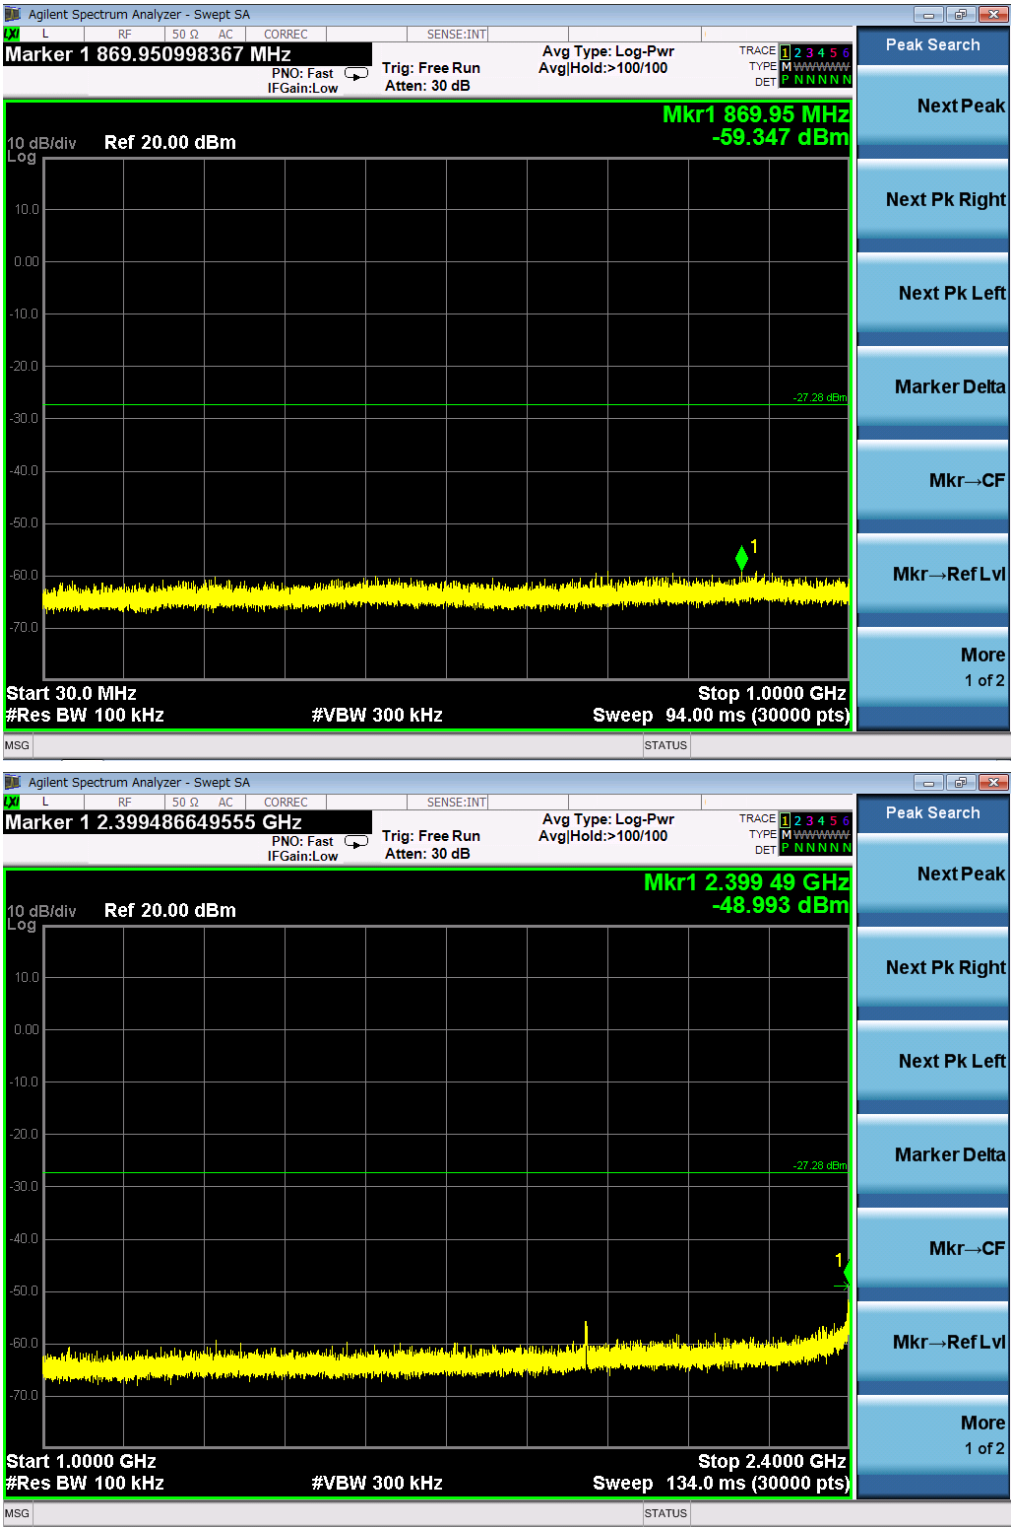



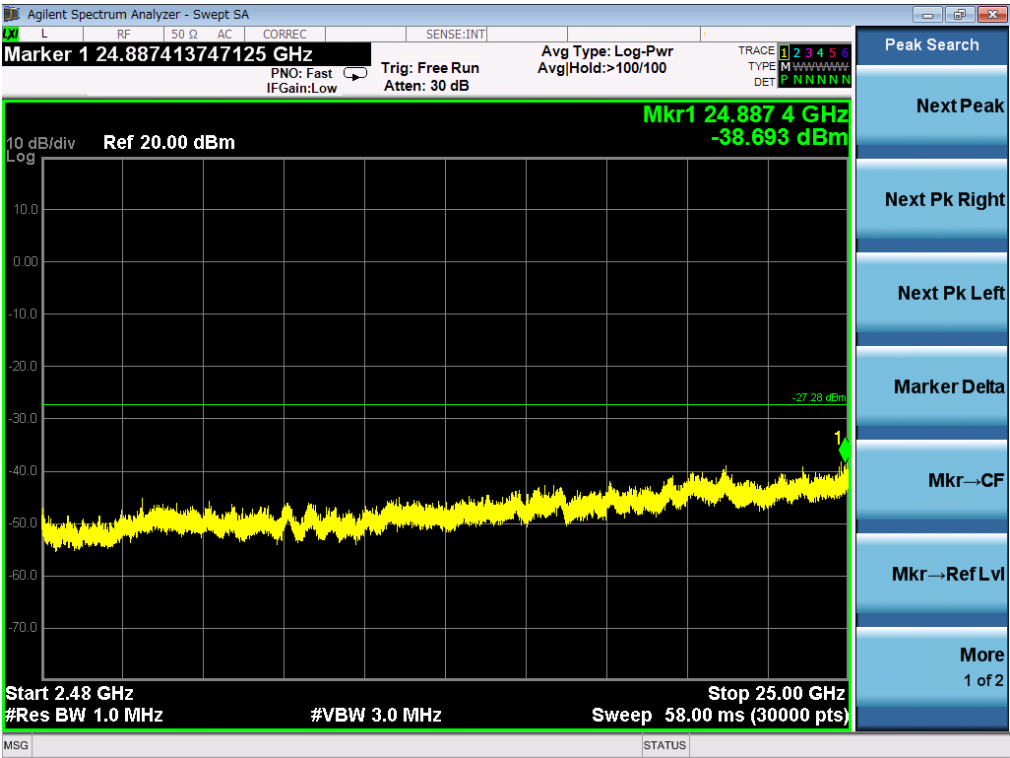

TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE  
OF 802.11n40 FOR MODULATION IN HIGH CHANNEL

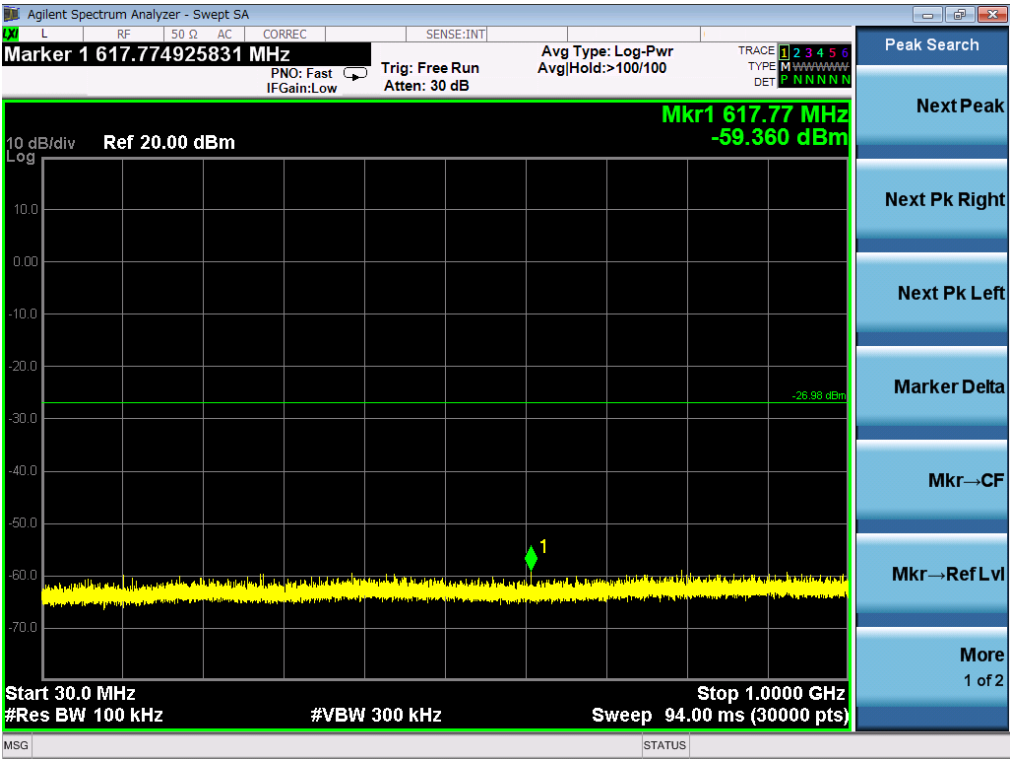



Note: The 100kHz RBW used in the conducted spurious test from 2.4835GHz to 25GHz may result in long measuring times, To avoid such long measuring times, the 1MHz RBW can be used for pre-test. If the emission level exceeded the limit at one or more frequencies, the 100kHz RBW would be used for final test at the special frequency.

## 10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

### 10.1 MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 10.2 was used in this testing.

### 10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer To Section 8.2.

### 10.3 MEASUREMENT EQUIPMENT USED

Refer To Section 6.

### 10.4 LIMITS AND MEASUREMENT RESULT

| TEST ITEM | POWER PECTRAL DENSITY    |
|-----------|--------------------------|
| TEST MODE | 802.11b with data rate 1 |

| Channel No.    | PSD<br>(dBm/3kHz) | Limit<br>(dBm/3kHz) | Result |
|----------------|-------------------|---------------------|--------|
| Low Channel    | -14.617           | 8                   | Pass   |
| Middle Channel | -14.193           | 8                   | Pass   |
| High Channel   | -13.508           | 8                   | Pass   |

| TEST ITEM | POWER PECTRAL DENSITY    |
|-----------|--------------------------|
| TEST MODE | 802.11g with data rate 6 |

| Channel No.    | PSD<br>(dBm/3kHz) | Limit<br>(dBm/3kHz) | Result |
|----------------|-------------------|---------------------|--------|
| Low Channel    | -16.526           | 8                   | Pass   |
| Middle Channel | -16.288           | 8                   | Pass   |
| High Channel   | -16.601           | 8                   | Pass   |

|                  |                               |
|------------------|-------------------------------|
| <b>TEST ITEM</b> | POWER PECTRAL DENSITY         |
| <b>TEST MODE</b> | 802.11n 20 with data rate 6.5 |

| Channel No.    | PSD<br>(dBm/3kHz) | Limit<br>(dBm/3kHz) | Result |
|----------------|-------------------|---------------------|--------|
| Low Channel    | -17.028           | 8                   | Pass   |
| Middle Channel | -16.576           | 8                   | Pass   |
| High Channel   | -16.817           | 8                   | Pass   |

|                  |                               |
|------------------|-------------------------------|
| <b>TEST ITEM</b> | POWER PECTRAL DENSITY         |
| <b>TEST MODE</b> | 802.11n 40 with data rate 6.5 |

| Channel No.    | PSD<br>(dBm/3kHz) | Limit<br>(dBm/3kHz) | Result |
|----------------|-------------------|---------------------|--------|
| Low Channel    | -21.478           | 8                   | Pass   |
| Middle Channel | -21.295           | 8                   | Pass   |
| High Channel   | -21.378           | 8                   | Pass   |

802.11b TEST RESULT  
TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL



TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL




TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL




802.11g TEST RESULT


TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

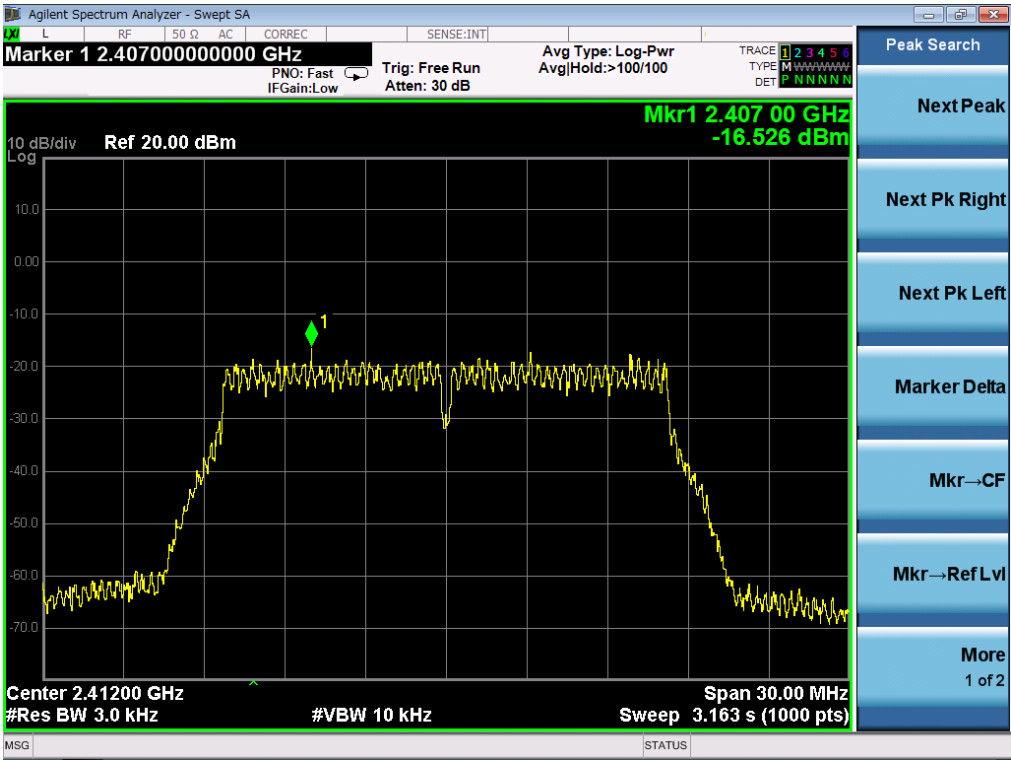


TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

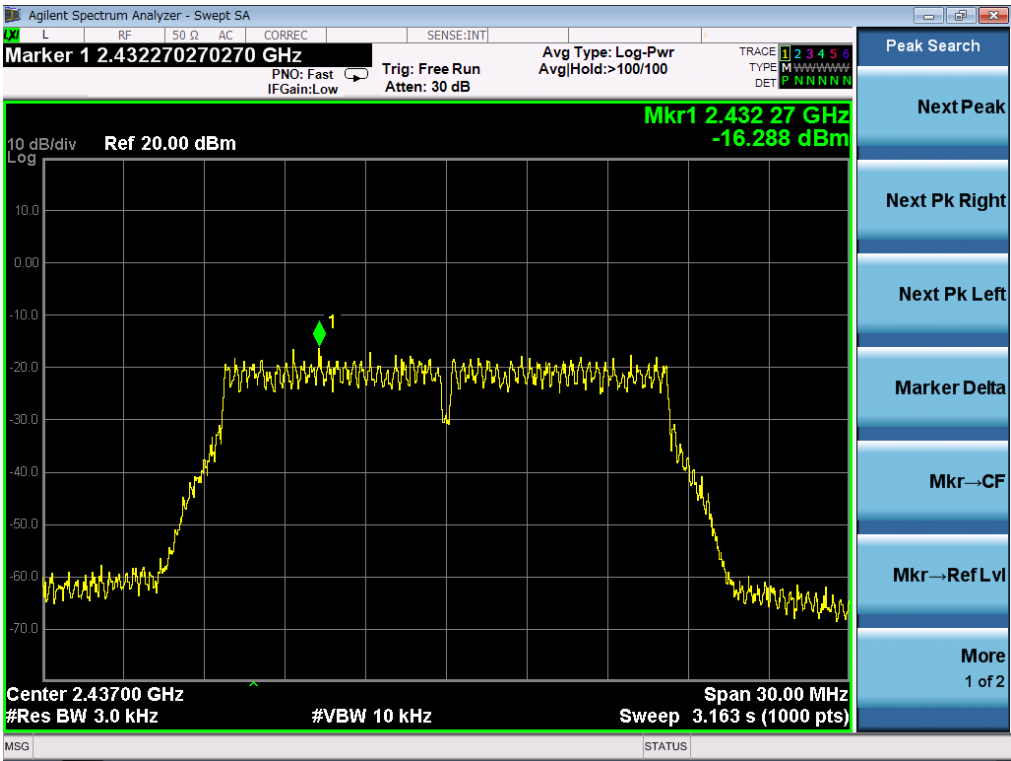


TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

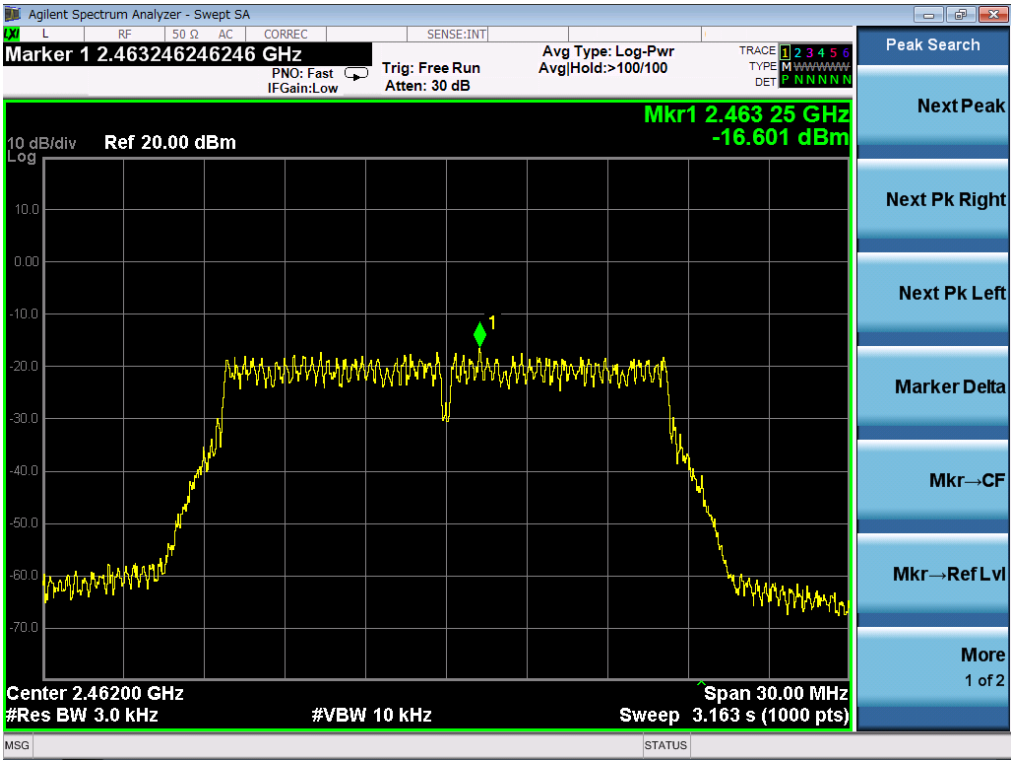

802.11n 20 TEST RESULT  
TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

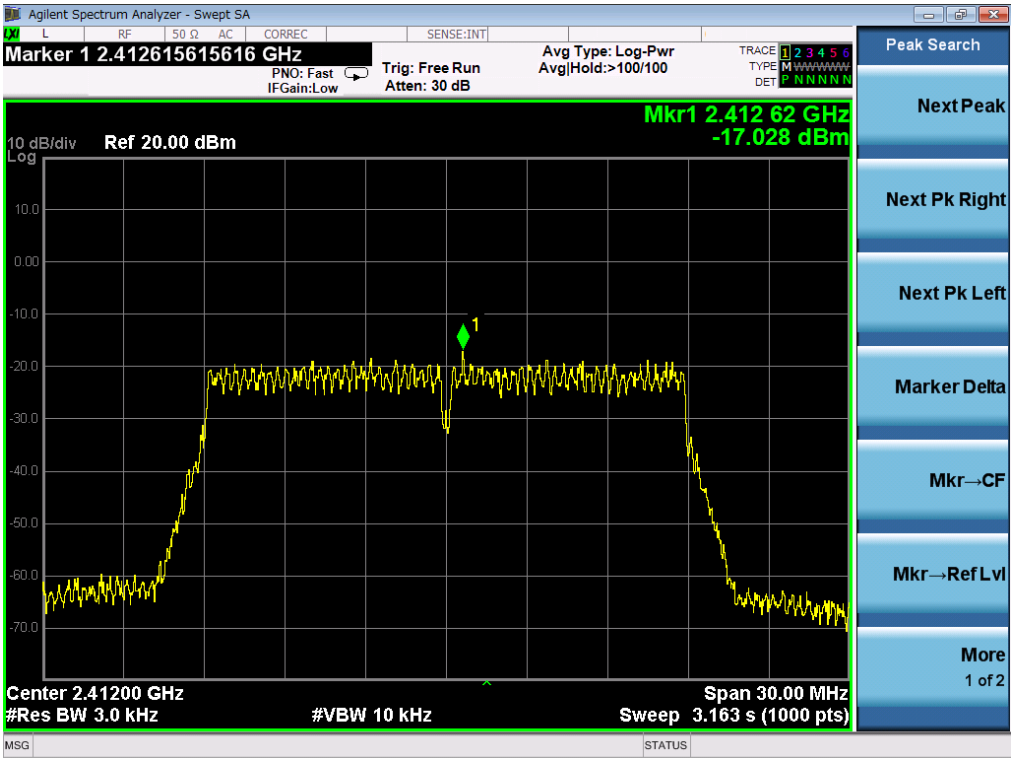


TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

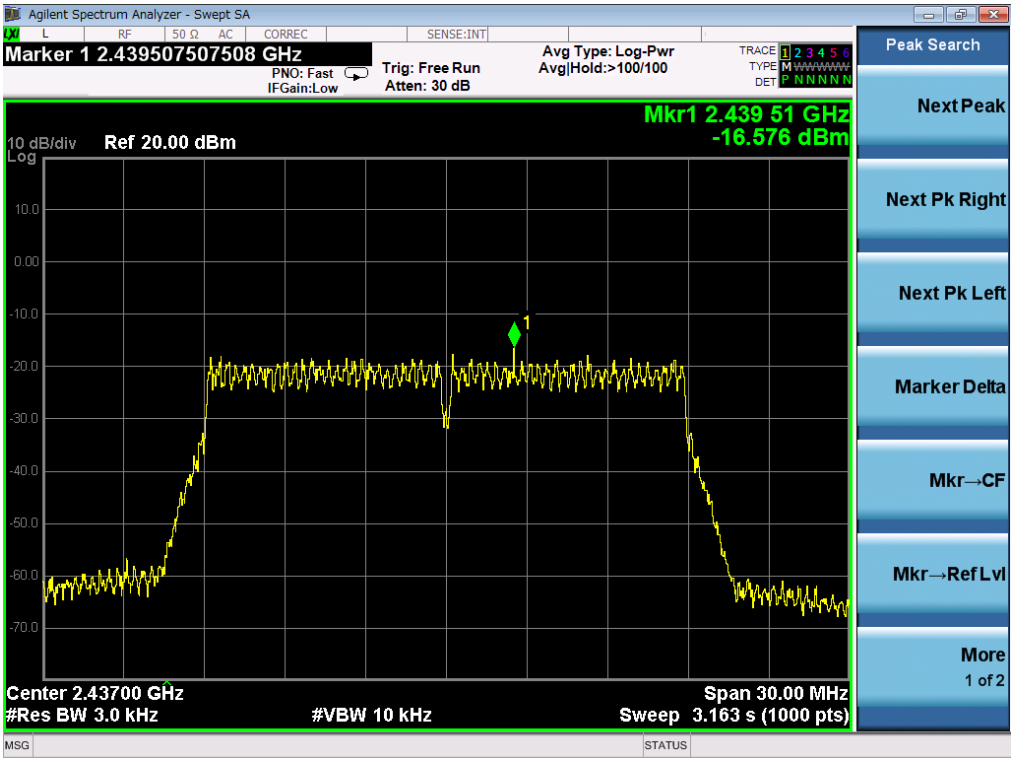




TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

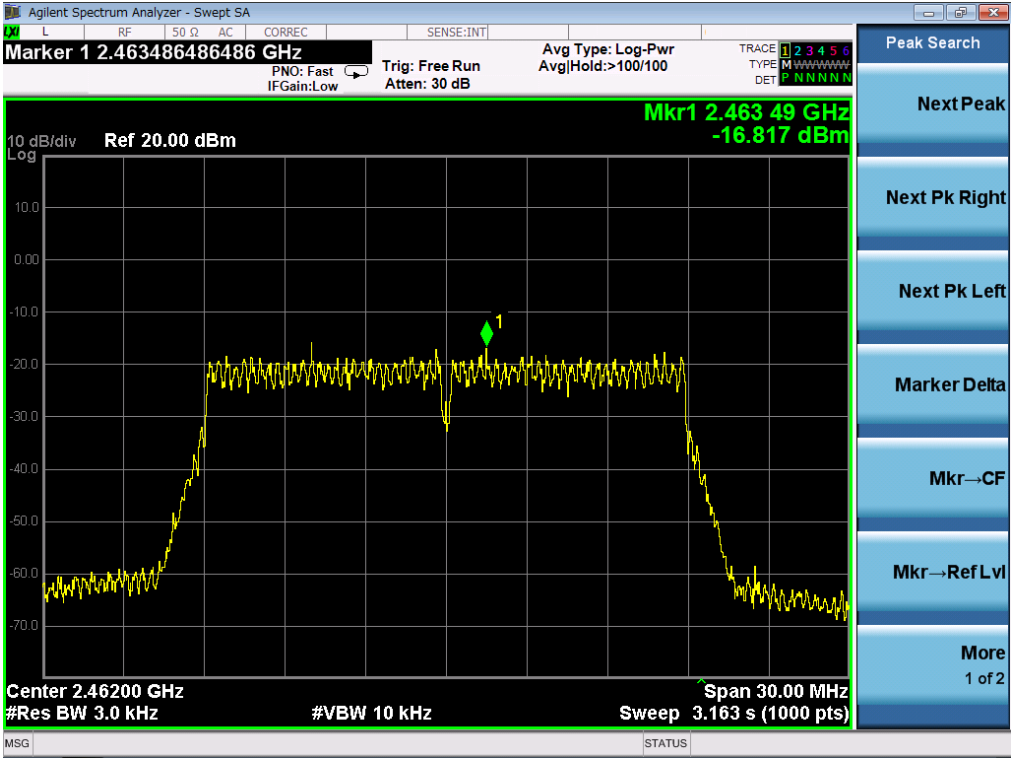


802.11n 40 TEST RESULT

TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

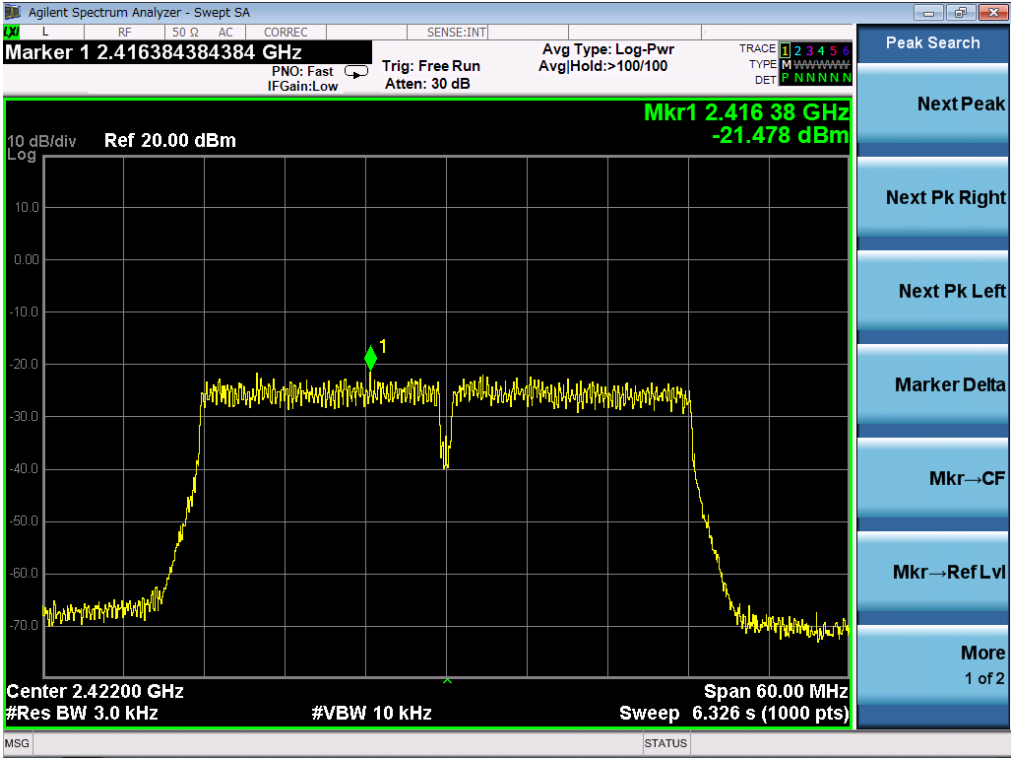

TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

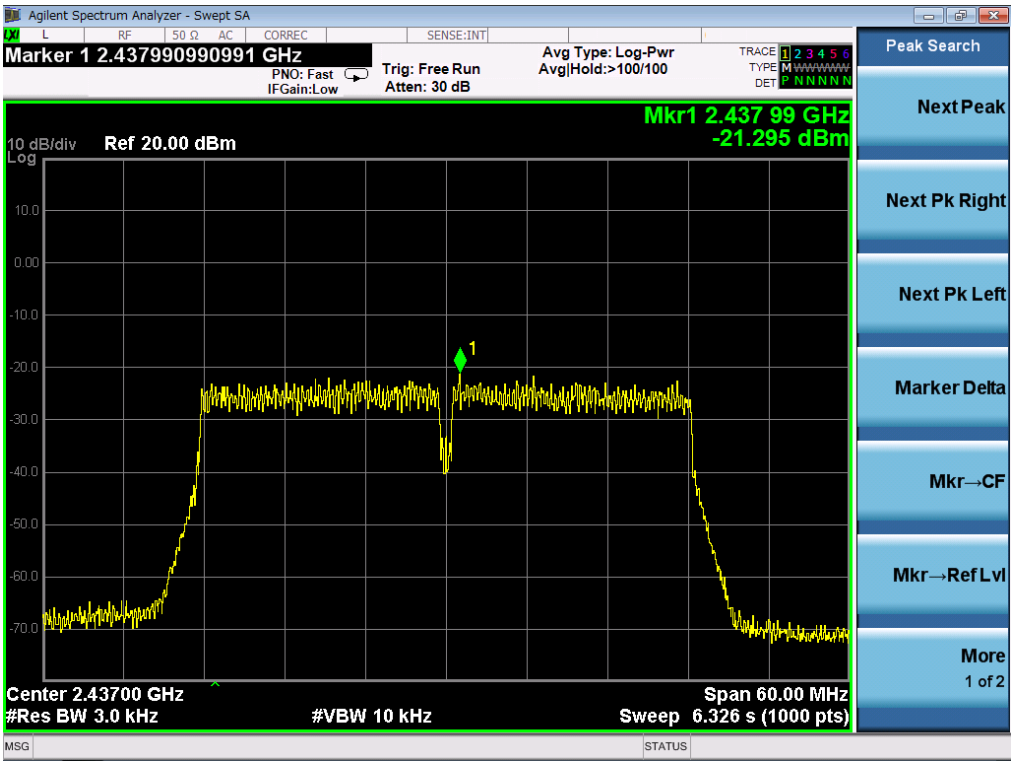

TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

