

# FCC Part 15C Measurement and Test Report

For

**TOPICON HK LIMITED**

**Room 2113-2114, Tower C, Huangdu Plaza, Yitian Road, Futian District,**

**Shenzhen, China**

**FCC ID: 2AHAF-MDT**

<b>FCC Rule(s):</b>	<u>FCC Part 15.247</u>
<b>Product Description:</b>	<u>GPS</u>
<b>Tested Model:</b>	<u>MDT750</u>
<b>Report No.:</b>	<u>STR18048256I-4</u>
<b>Sample Receipt Date:</b>	<u>2018-04-25</u>
<b>Tested Date:</b>	<u>2018-04-26 to 2018-07-31</u>
<b>Issued Date:</b>	<u>2018-07-01</u>
<b>Tested By:</b>	<u>Jason Su / Engineer</u>
<b>Reviewed By:</b>	<u>Silin Chen / EMC Manager</u>
<b>Approved &amp; Authorized By:</b>	<u>Jandy So / PSQ Manager</u>
<b>Prepared By:</b>	

*Jason Su*  
*Silin Chen*  
*Jandy So*

**Shenzhen SEM Test Technology Co., Ltd.**

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	4
1.3 TEST METHODOLOGY	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND TEST MODE	5
1.6 MEASUREMENT UNCERTAINTY	5
1.7 TEST EQUIPMENT LIST AND DETAILS	6
<b>2. SUMMARY OF TEST RESULTS</b>	<b>7</b>
<b>3. RF EXPOSURE</b>	<b>8</b>
3.1 STANDARD APPLICABLE	8
3.2 TEST RESULT	8
<b>4. ANTENNA REQUIREMENT</b>	<b>9</b>
4.1 STANDARD APPLICABLE	9
4.2 EVALUATION INFORMATION	9
<b>5. POWER SPECTRAL DENSITY</b>	<b>10</b>
5.1 STANDARD APPLICABLE	10
5.2 TEST PROCEDURE	10
5.3 SUMMARY OF TEST RESULTS/PLOTS	10
<b>6. 6DB BANDWIDTH</b>	<b>12</b>
6.1 STANDARD APPLICABLE	12
6.2 TEST PROCEDURE	12
6.3 SUMMARY OF TEST RESULTS/PLOTS	12
<b>7. RF OUTPUT POWER</b>	<b>14</b>
7.1 STANDARD APPLICABLE	14
7.2 TEST PROCEDURE	14
7.3 SUMMARY OF TEST RESULTS/PLOTS	14
<b>8. FIELD STRENGTH OF SPURIOUS EMISSIONS</b>	<b>16</b>
8.1 STANDARD APPLICABLE	16
8.2 TEST PROCEDURE	16
8.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	17
8.4 SUMMARY OF TEST RESULTS/PLOTS	17
<b>9. OUT OF BAND EMISSIONS</b>	<b>32</b>
9.1 STANDARD APPLICABLE	32
9.2 TEST PROCEDURE	32
9.3 SUMMARY OF TEST RESULTS/PLOTS	33

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: TOPICON HK LIMITED  
Address of applicant: Room 2113-2114, Tower C, Huangdu Plaza, Yitian Road,  
Futian District, Shenzhen, China

Manufacturer: TOPICON HK LIMITED  
Address of manufacturer: Room 2113-2114, Tower C, Huangdu Plaza, Yitian Road,  
Futian District, Shenzhen, China

General Description of EUT	
Product Name:	GPS
Brand Name:	/
Model No.:	MDT750
Adding Model(s):	MDT740, MDT730, MDT720, MDT721, MDT701, MDT702, MDT703, MDT713D, M700, M700A, M700AG, M700AB, M700B, M700AKB, M700C, OBC720, MDT840, MDT850
Rated Voltage:	DC 3.7V by Battery
Battery Capacity:	4300mAh
Power Adapter:	/
Software Version (MDT750):	mdt750_gms_lite_1.3.4.98a7a18
Hardware Version (MDT750):	MDT750-V30
Software Version (MDT850):	mdt750_1.3.2-1g5e16090-dirty.5e16090-dirty
Hardware Version (MDT850):	MDT750-V30
<i>The EUT Main board support GSM850/PCS1900, WCDMA Band 2/5 function. It is intended for Multimedia Message Service (MMS) transmission. It is equipped with GPRS/EDGE class 12 for GSM850/PCS1900, GPS, NFC, Bluetooth and Wi-Fi functions. For more information see the following datasheet.</i>	
<i>Note: The test data is gathered from a production sample provided by the manufacturer. The screen size of others models listed in the report is different from main-test model MDT750, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

<b>Technical Characteristics of EUT</b>	
Bluetooth Version:	V4.0 (BLE mode)
Frequency Range:	2402-2480MHz
RF Output Power:	1.848dBm (Conducted)
Data Rate:	1Mbps
Modulation:	GFSK
Quantity of Channels:	40
Channel Separation:	2MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	3.0dBi
Lowest Internal Frequency of EUT:	32.768kHz
Highest Internal Frequency of EUT:	2.480GHz

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.247:** Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

**558074 D01 DTS Meas Guidance v04:** GUIDANCE FOR PERFORMING COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEMS (DTS) OPERATING UNDER SECTION 15.247

**ANSI C63.10-2013:** American National Standard for Testing Unlicensed Wireless Devices.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 DTS Meas Guidance v04

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### **FCC – Registration No.: 125990**

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low	2402MHz
TM2	Middle	2440MHz
TM3	High	2480MHz

Test Conditions	
Temperature:	22~25 °C
Relative humidity	50~55 %.
ATM Pressure:	1019 mbar

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.0	Shielded	Without Core
Camera Cable	0.4	Unshielded	Without Core
Power supply cable	1.1	Unshielded	Without Core

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

## 1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2018-05-22	2019-05-21
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2018-05-22	2019-05-21
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-03-19	2021-03-18
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18

## 2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	N/A*
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

Remark: The AC Line Conducted Emissions testing is exempted because the device is intended to be used vehicle and powered by on-board battery. Thus, the AC Line Conducted Emissions testing is not applicable.

### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the SAR Report.



## **4. Antenna Requirement**

---

### **4.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **4.2 Evaluation Information**

This product has an integral antenna, fulfill the requirement of this section.

## 5. Power Spectral Density

### 5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 5.2 Test Procedure




According to the KDB 558074, the test method of power spectral density as below:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 5.3 Summary of Test Results/Plots

Test Mode	Test Channel	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
GFSK(BLE)	Low	-14.69	8
	Middle	-14.32	8
	High	-14.86	8

Please refer to the following test plots:
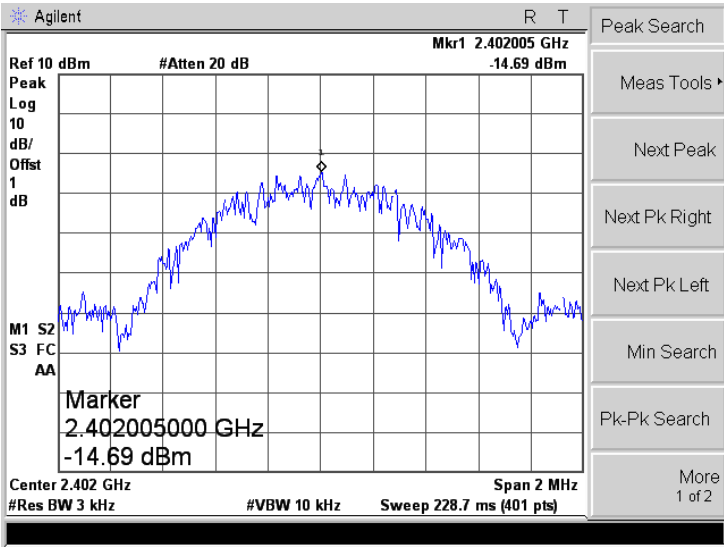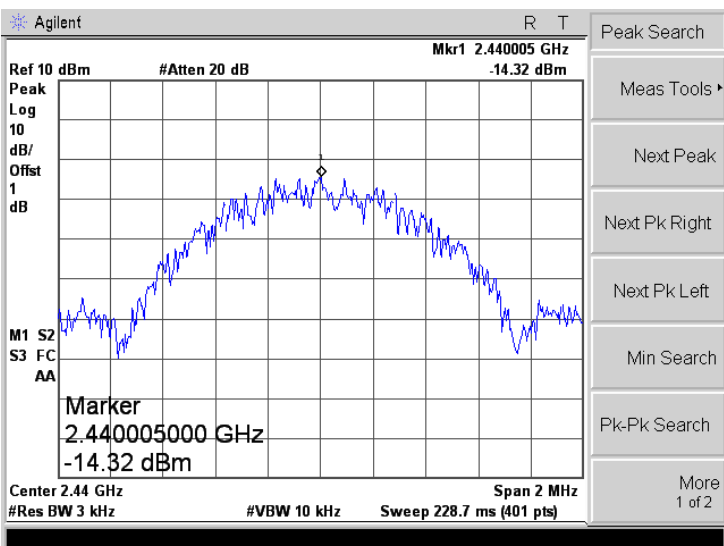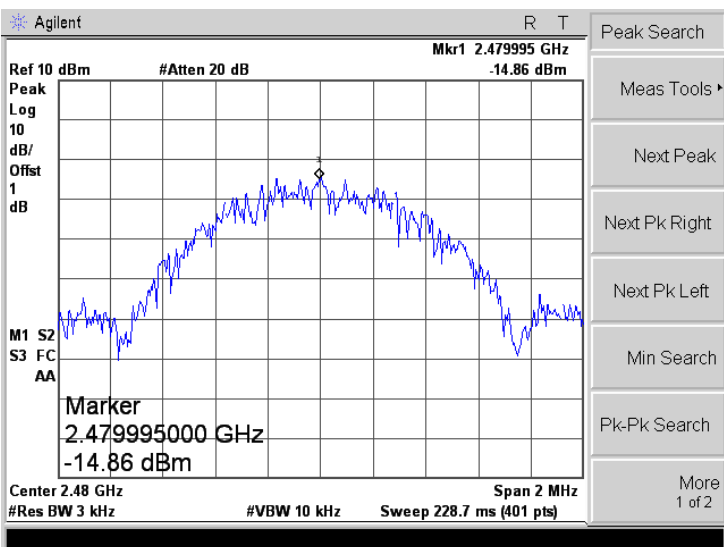
<p>Low</p>	 <p>Agilent R T          Ref 10 dBm #Atten 20 dB Mkr1 2.402005 GHz -14.69 dBm          Peak Search          Meas Tools          Next Peak          Next Pk Right          Next Pk Left          Min Search          Pk-Pk Search          More 1 of 2</p> <p>Marker          2.402005000 GHz          -14.69 dBm</p> <p>Center 2.402 GHz Span 2 MHz          #Res BW 3 kHz #VBW 10 kHz Sweep 228.7 ms (401 pts)</p>
<p>Middle</p>	 <p>Agilent R T          Ref 10 dBm #Atten 20 dB Mkr1 2.440005 GHz -14.32 dBm          Peak Search          Meas Tools          Next Peak          Next Pk Right          Next Pk Left          Min Search          Pk-Pk Search          More 1 of 2</p> <p>Marker          2.440005000 GHz          -14.32 dBm</p> <p>Center 2.44 GHz Span 2 MHz          #Res BW 3 kHz #VBW 10 kHz Sweep 228.7 ms (401 pts)</p>
<p>High</p>	 <p>Agilent R T          Ref 10 dBm #Atten 20 dB Mkr1 2.479995 GHz -14.86 dBm          Peak Search          Meas Tools          Next Peak          Next Pk Right          Next Pk Left          Min Search          Pk-Pk Search          More 1 of 2</p> <p>Marker          2.479995000 GHz          -14.86 dBm</p> <p>Center 2.48 GHz Span 2 MHz          #Res BW 3 kHz #VBW 10 kHz Sweep 228.7 ms (401 pts)</p>

## 6. 6dB Bandwidth

---

### 6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.


### 6.2 Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.3 Summary of Test Results/Plots

Test Mode	Test Channel	6 dB Bandwidth kHz	Limit kHz
GFSK(BLE)	Low	683.122	$\geq 500$
	Middle	688.920	$\geq 500$
	High	688.234	$\geq 500$

Please refer to the following test plots:
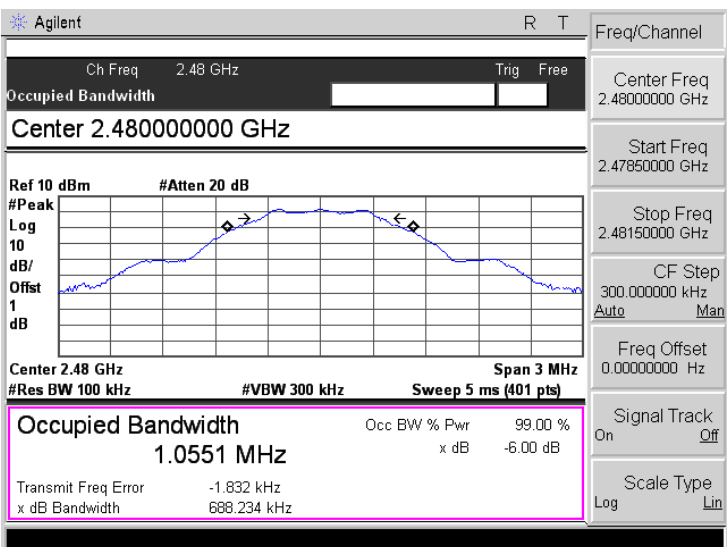
<p style="text-align: center;">Low</p>	 <p>Agilent R T</p> <p>Ch Freq 2.402 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.40200000 GHz</b></p> <p>Ref 10 dBm #Atten 20 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.402 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5 ms (401 pts)</p> <p><b>Occupied Bandwidth 1.0692 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -1.378 kHz x dB Bandwidth 688.122 kHz</p> <p>Freq/Channel</p> <p>Center Freq 2.40200000 GHz</p> <p>Start Freq 2.40050000 GHz</p> <p>Stop Freq 2.40350000 GHz</p> <p>CF Step 300.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p style="text-align: center;">Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 2.44 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.44000000 GHz</b></p> <p>Ref 10 dBm #Atten 20 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.44 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5 ms (401 pts)</p> <p><b>Occupied Bandwidth 1.0559 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -6.180 kHz x dB Bandwidth 688.920 kHz</p> <p>Freq/Channel</p> <p>Center Freq 2.44000000 GHz</p> <p>Start Freq 2.43850000 GHz</p> <p>Stop Freq 2.44150000 GHz</p> <p>CF Step 300.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p style="text-align: center;">High</p>	 <p>Agilent R T</p> <p>Ch Freq 2.48 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.48000000 GHz</b></p> <p>Ref 10 dBm #Atten 20 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.48 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5 ms (401 pts)</p> <p><b>Occupied Bandwidth 1.0551 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -1.832 kHz x dB Bandwidth 688.234 kHz</p> <p>Freq/Channel</p> <p>Center Freq 2.48000000 GHz</p> <p>Start Freq 2.47850000 GHz</p> <p>Stop Freq 2.48150000 GHz</p> <p>CF Step 300.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

## 7. RF Output Power

### 7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

### 7.2 Test Procedure




According to section KDB-558074 D01 v04 section 9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW  $\geq$  DTS bandwidth.
- b) Set VBW  $\geq 3 \times$  RBW.
- c) Set span  $\geq 3 \times$  RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

### 7.3 Summary of Test Results/Plots

Test Mode	Test Channel	Reading dBm	Output Power mW	Limit mW
GFSK(BLE)	Low	0.994	1.257	1000
	Middle	1.848	1.530	1000
	High	1.775	1.505	1000

*Note: the antenna gain of 3.0dBi less than 6dBi maximum permission antenna gain value based on 1 watt peak output power limit.*
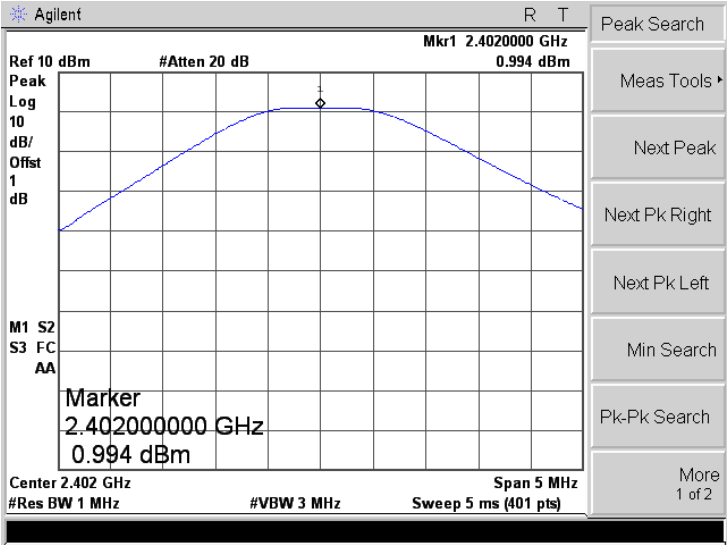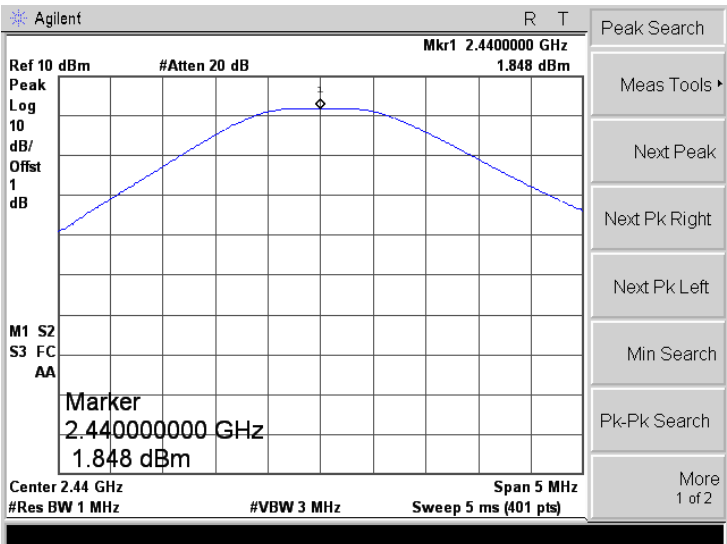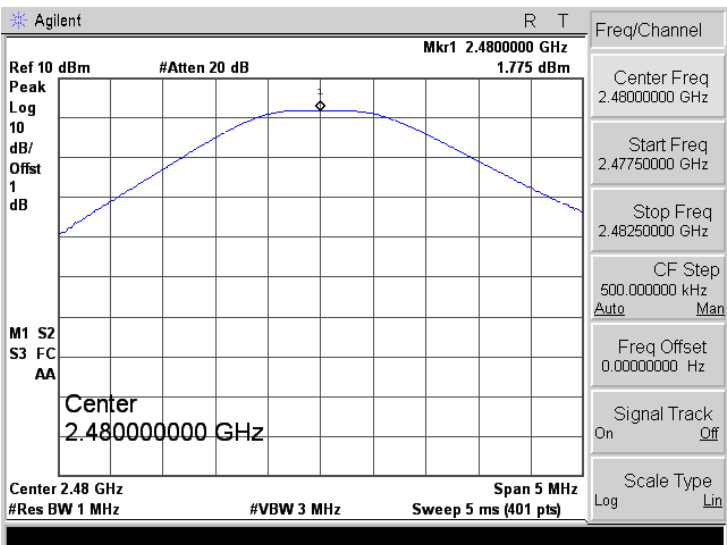
<p>Low</p>	 <p>Agilent R T Peak Search          Ref 10 dBm #Atten 20 dB Mkr1 2.4020000 GHz 0.994 dBm          Peak Log 10 dB/ Offst 1 dB          Marker 2.402000000 GHz 0.994 dBm          Center 2.402 GHz Span 5 MHz          #Res BW 1 MHz #VBW 3 MHz Sweep 5 ms (401 pts)</p>
<p>Middle</p>	 <p>Agilent R T Peak Search          Ref 10 dBm #Atten 20 dB Mkr1 2.4400000 GHz 1.848 dBm          Peak Log 10 dB/ Offst 1 dB          Marker 2.440000000 GHz 1.848 dBm          Center 2.44 GHz Span 5 MHz          #Res BW 1 MHz #VBW 3 MHz Sweep 5 ms (401 pts)</p>
<p>High</p>	 <p>Agilent R T Freq/Channel          Ref 10 dBm #Atten 20 dB Mkr1 2.4800000 GHz 1.775 dBm          Peak Log 10 dB/ Offst 1 dB          Center 2.480000000 GHz          Center 2.48 GHz Span 5 MHz          #Res BW 1 MHz #VBW 3 MHz Sweep 5 ms (401 pts)</p> <p>Center Freq 2.48000000 GHz          Start Freq 2.47750000 GHz          Stop Freq 2.48250000 GHz          CF Step 500.000000 kHz          Auto Man          Freq Offset 0.00000000 Hz          Signal Track On Off          Scale Type Log Lin</p>

## 8. Field Strength of Spurious Emissions

### 8.1 Standard Applicable


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


### 8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

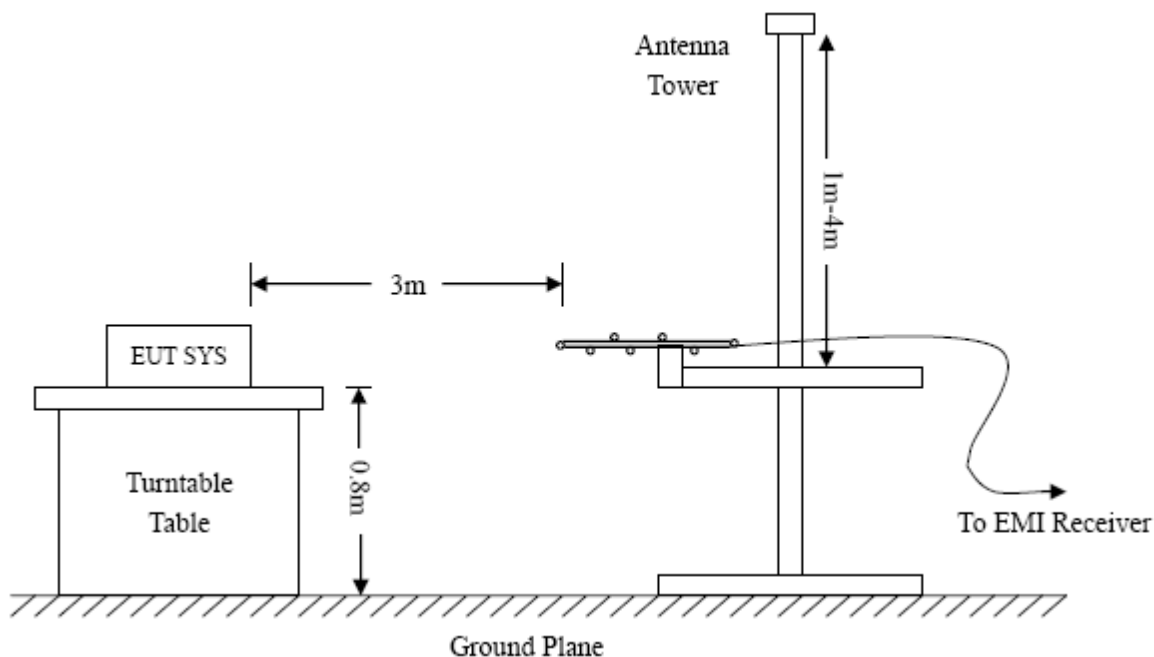



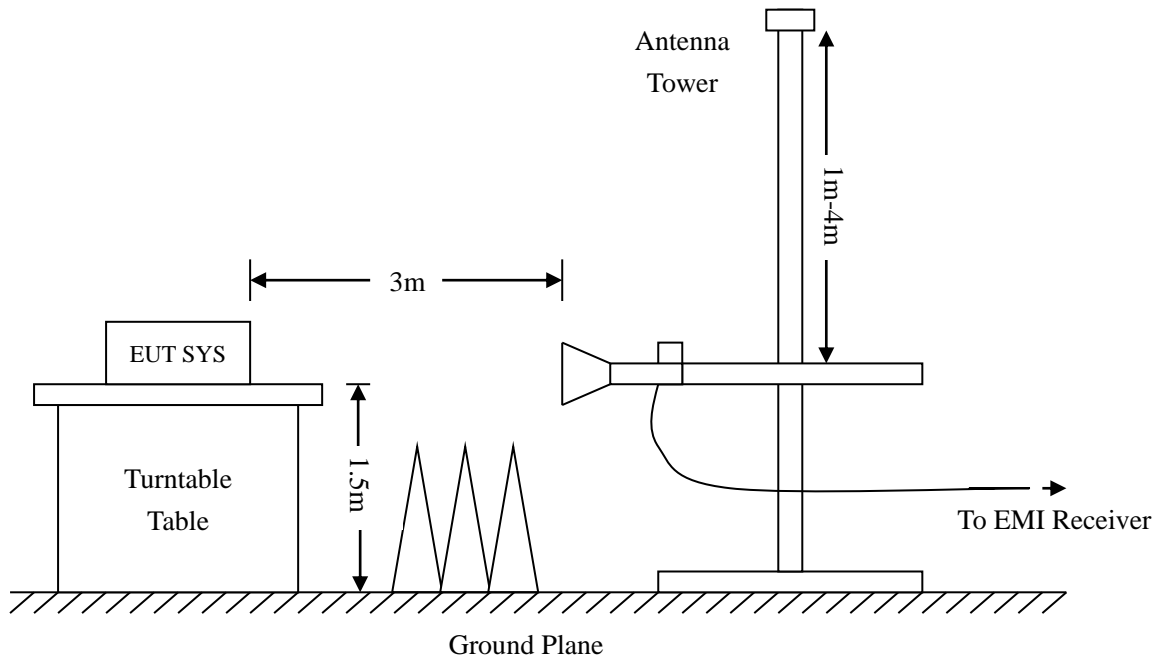

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

### 8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of  $-6\text{dB}\mu\text{V}$  means the emission is  $6\text{dB}\mu\text{V}$  below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

### 8.4 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


- Spurious Emissions Below 1GHz
- Model: MDT750

Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

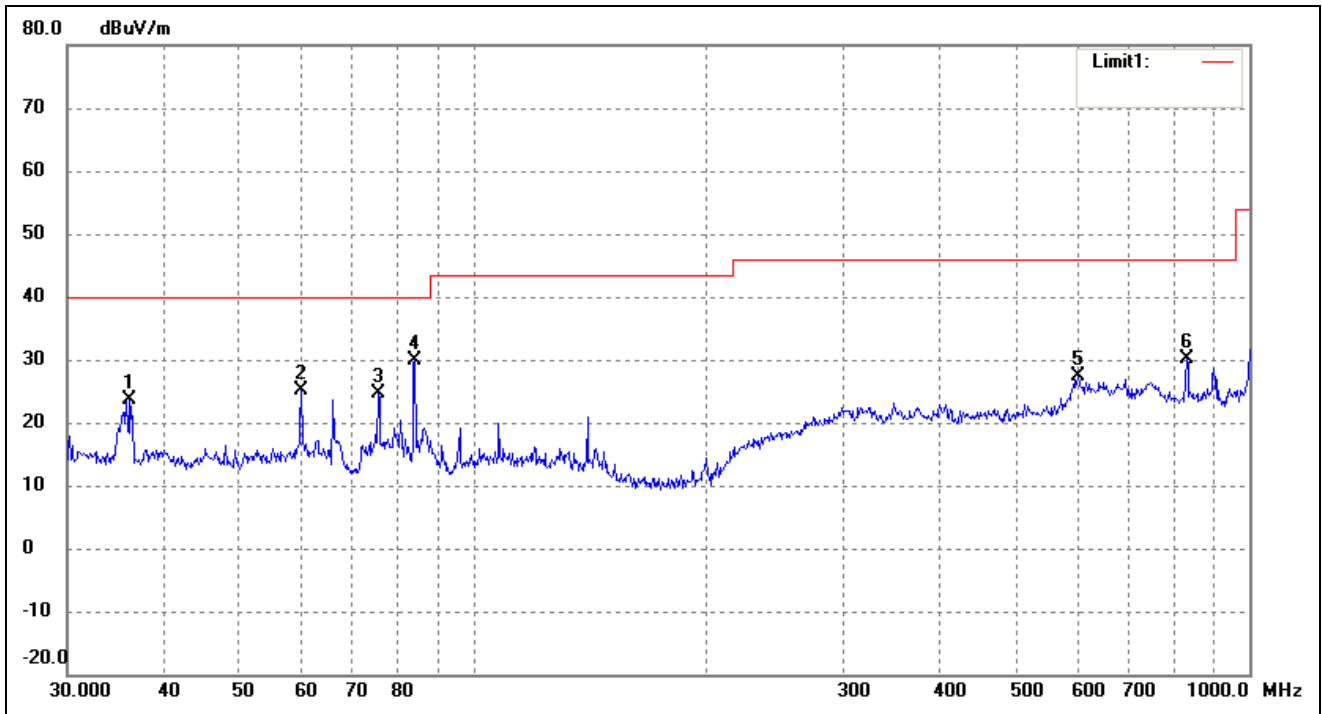


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	36.0007	42.80	-19.17	23.63	40.00	-16.37	282	100	peak
2	60.0691	43.27	-18.23	25.04	40.00	-14.96	93	100	peak
3	75.4464	45.76	-21.10	24.66	40.00	-15.34	306	100	peak
4	84.1100	50.80	-20.87	29.93	40.00	-10.07	112	100	peak
5	601.4265	29.92	-2.66	27.26	46.00	-18.74	108	100	peak
6	830.4002	34.61	-4.38	30.23	46.00	-15.77	173	100	peak

Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

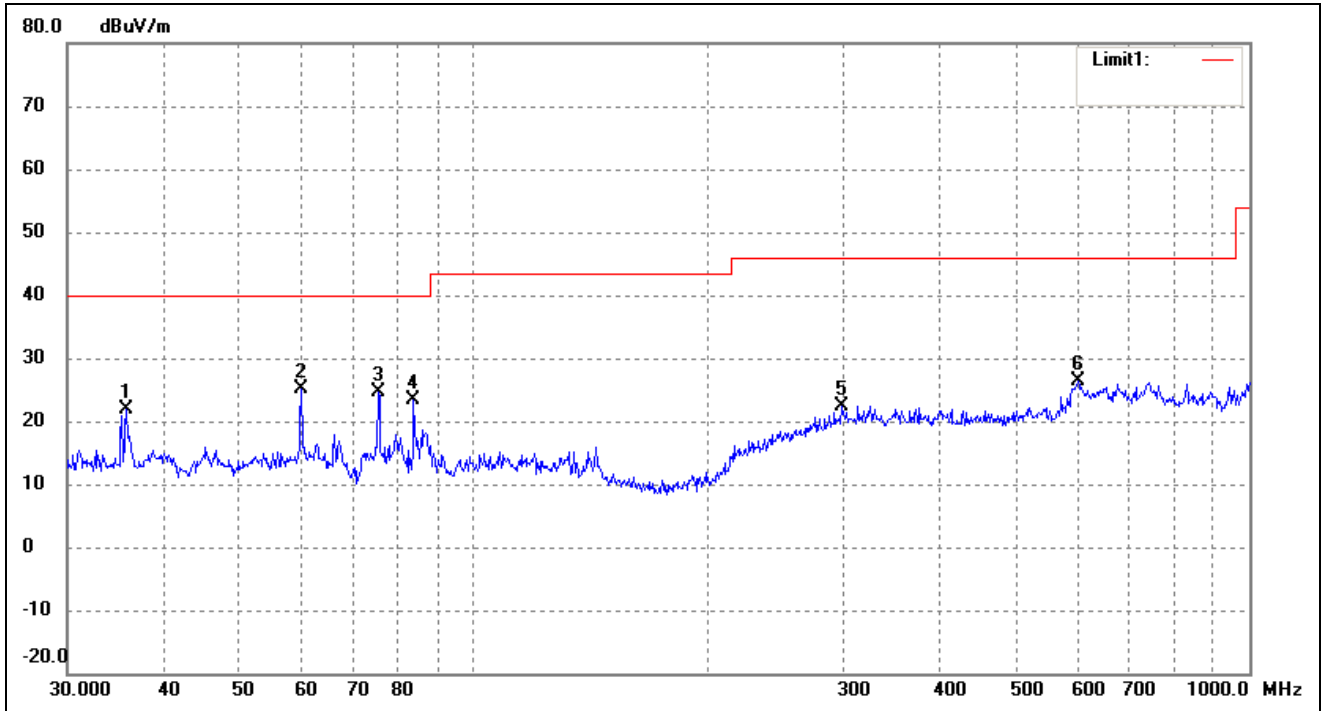


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	35.7491	41.18	-19.22	21.96	40.00	-18.04	185	100	peak
2	60.0691	43.27	-18.23	25.04	40.00	-14.96	195	100	peak
3	75.4464	45.76	-21.10	24.66	40.00	-15.34	77	100	peak
4	83.8156	44.23	-20.92	23.31	40.00	-16.69	256	100	peak
5	298.2681	30.44	-8.01	22.43	46.00	-23.57	50	100	peak
6	601.4265	28.94	-2.66	26.28	46.00	-19.72	283	100	peak

Test Channel	Middle	Polarity:	Horizontal
--------------	--------	-----------	------------

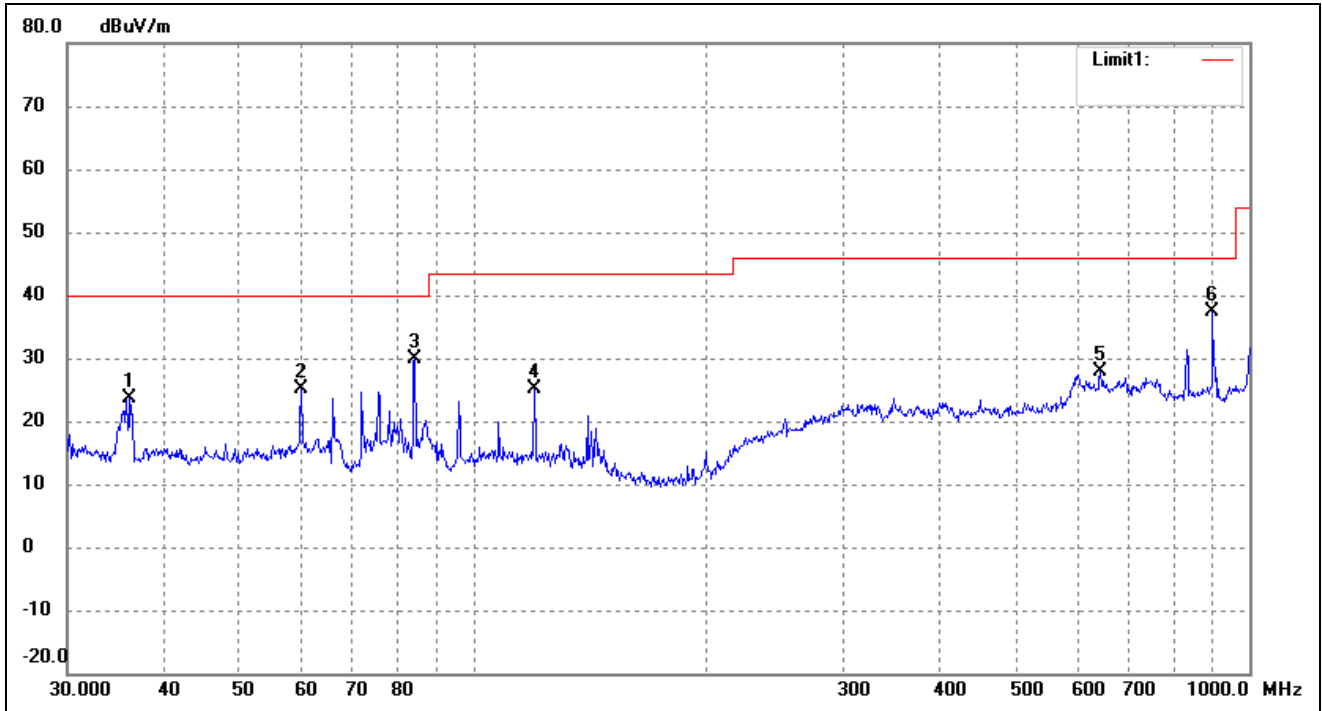


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	36.0007	42.80	-19.17	23.63	40.00	-16.37	92	100	peak
2	60.0691	43.27	-18.23	25.04	40.00	-14.96	150	100	peak
3	84.1100	50.80	-20.87	29.93	40.00	-10.07	126	100	peak
4	119.8556	42.95	-17.86	25.09	43.50	-18.41	128	100	peak
5	642.8613	31.10	-3.32	27.78	46.00	-18.22	317	100	peak
6	896.9965	41.17	-3.83	37.34	46.00	-8.66	203	100	peak

Test Channel	Middle	Polarity:	Vertical
--------------	--------	-----------	----------

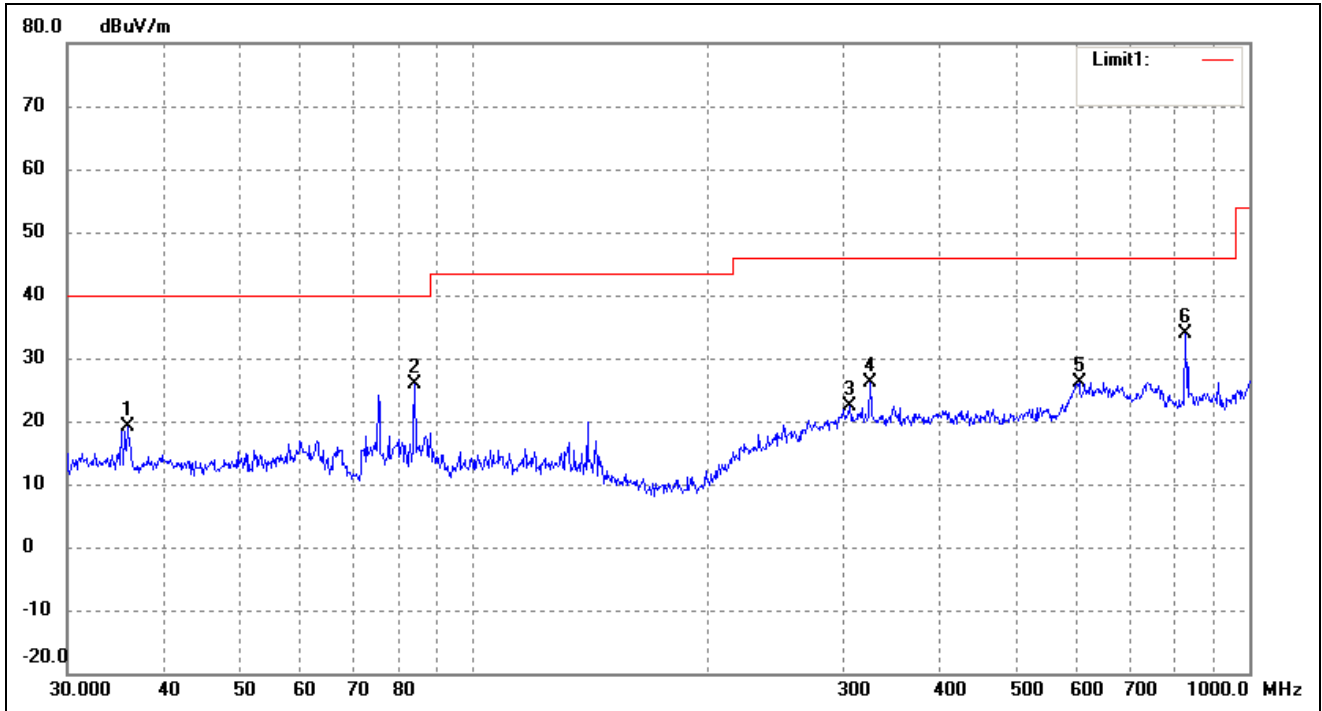


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	35.8747	38.43	-19.20	19.23	40.00	-20.77	265	100	peak
2	84.1100	46.85	-20.87	25.98	40.00	-14.02	94	100	peak
3	305.6800	30.38	-7.91	22.47	46.00	-23.53	295	100	peak
4	324.4561	34.11	-8.09	26.02	46.00	-19.98	97	100	peak
5	603.5392	29.04	-2.80	26.24	46.00	-19.76	54	100	peak
6	827.4934	38.45	-4.50	33.95	46.00	-12.05	209	100	peak

Test Channel	High	Polarity:	Horizontal
--------------	------	-----------	------------

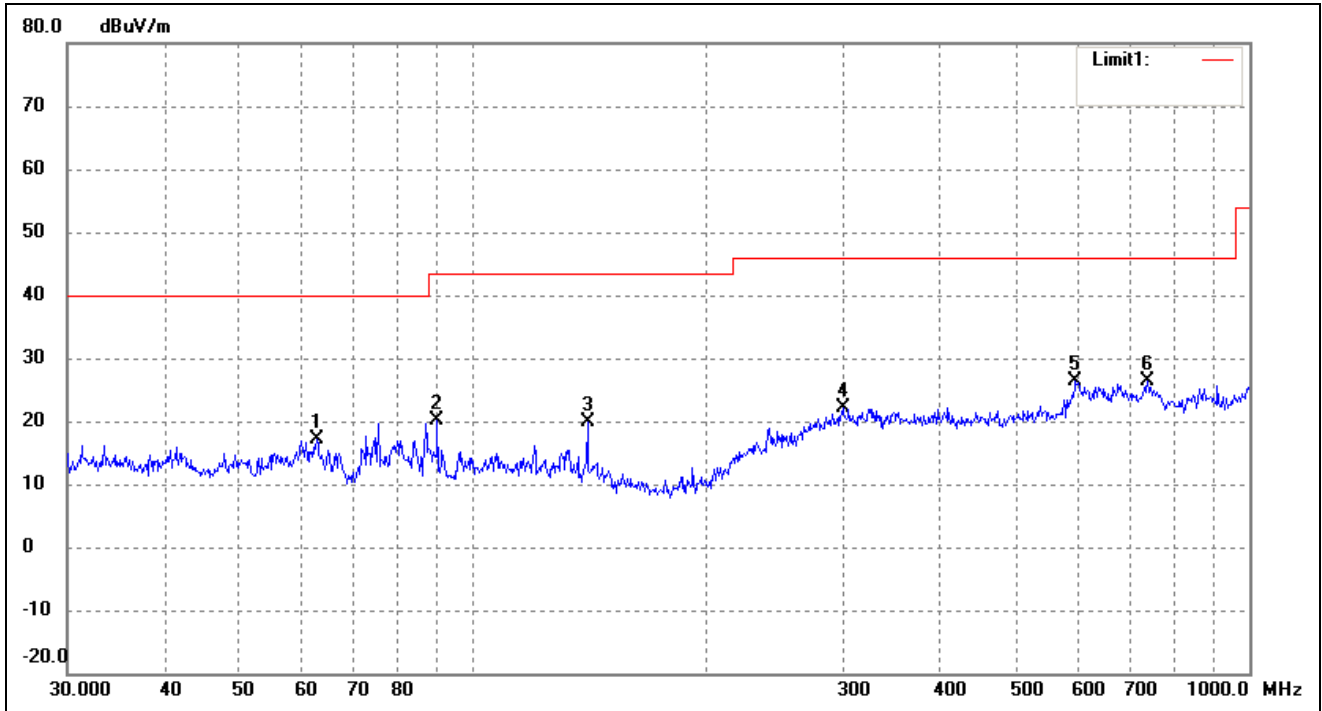

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	62.8708	35.90	-18.85	17.05	40.00	-22.95	341	100	peak
2	89.9047	39.97	-19.77	20.20	43.50	-23.30	99	100	peak
3	140.3421	39.14	-19.15	19.99	43.50	-23.51	61	100	peak
4	299.3158	30.16	-7.94	22.22	46.00	-23.78	100	100	peak
5	597.2234	29.52	-3.06	26.46	46.00	-19.54	194	100	peak
6	739.6604	28.87	-2.39	26.48	46.00	-19.52	314	100	peak


Test Channel	High	Polarity:	Vertical
--------------	------	-----------	----------

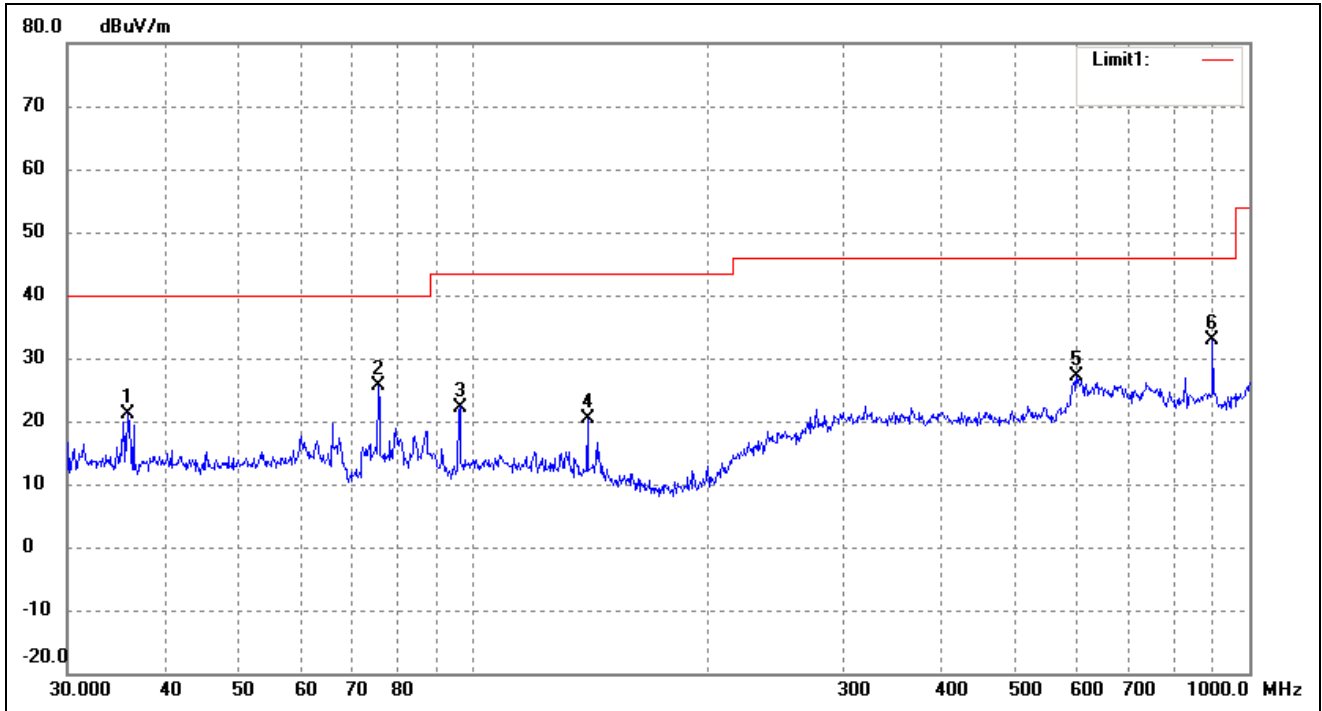

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	35.8747	40.36	-19.20	21.16	40.00	-18.84	100	100	peak
2	75.4464	46.75	-21.10	25.65	40.00	-14.35	174	100	peak
3	96.0986	40.99	-18.74	22.25	43.50	-21.25	113	100	peak
4	140.3421	39.54	-19.15	20.39	43.50	-23.11	98	100	peak
5	599.3213	29.85	-2.68	27.17	46.00	-18.83	340	100	peak
6	896.9965	36.59	-3.83	32.76	46.00	-13.24	259	100	peak

➤ Model: MDT850


Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

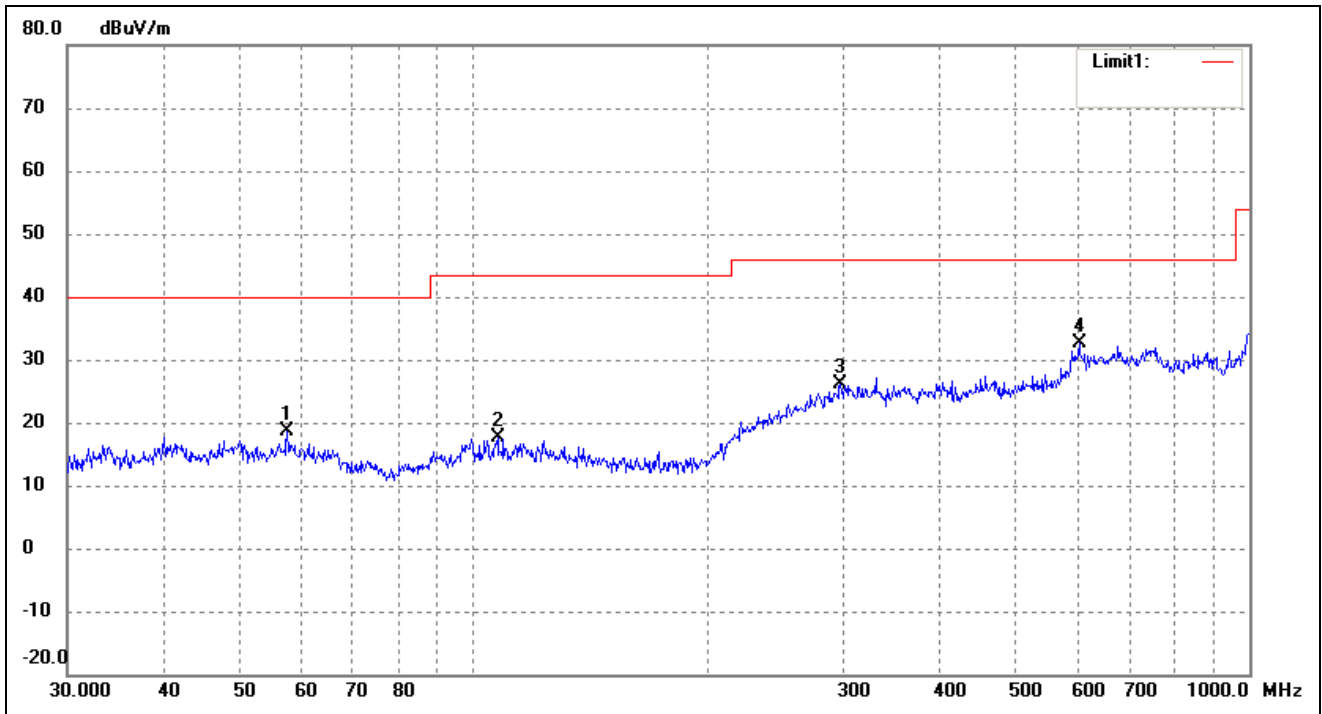

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	57.5939	34.18	-15.54	18.64	40.00	-21.36	292	100	peak
2	107.5101	32.66	-14.95	17.71	43.50	-25.79	94	100	peak
3	297.2241	30.48	-4.43	26.05	46.00	-19.95	156	100	peak
4	603.5392	31.05	1.66	32.71	46.00	-13.29	102	100	peak




Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

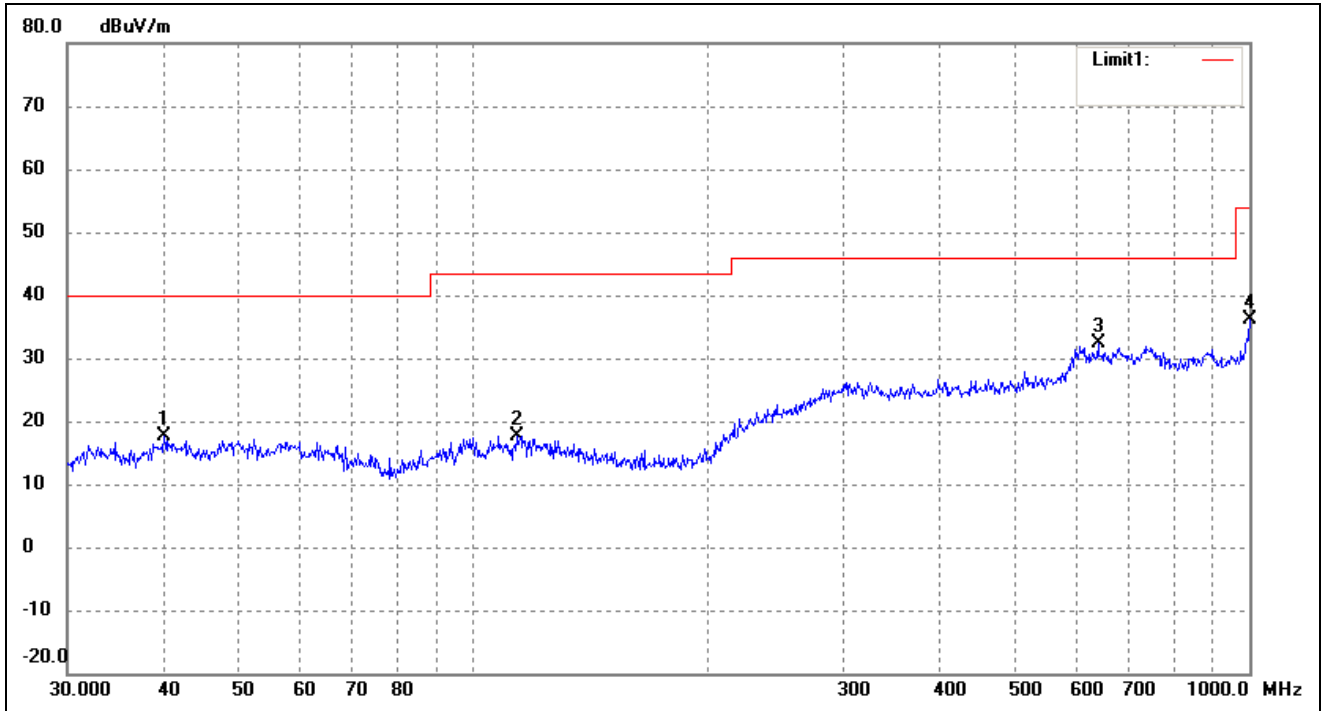


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	39.9942	36.27	-18.53	17.74	40.00	-22.26	278	100	peak
2	113.7143	35.62	-17.94	17.68	43.50	-25.82	95	100	peak
3	638.3686	35.60	-3.31	32.29	46.00	-13.71	219	100	peak
4	1000.0000	37.14	-0.89	36.25	54.00	-17.75	91	100	peak

Test Channel	Middle	Polarity:	Horizontal
--------------	--------	-----------	------------

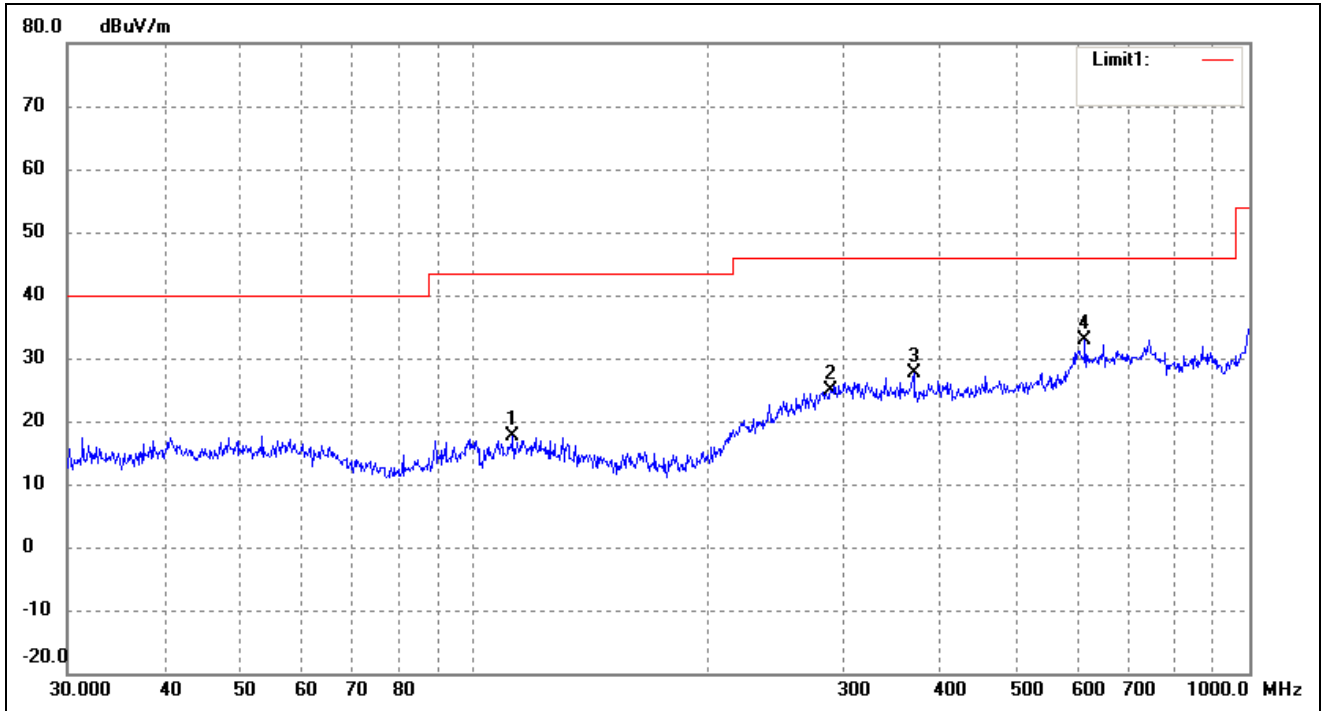


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	112.5244	32.48	-14.88	17.60	43.50	-25.90	349	100	peak
2	289.0021	29.90	-4.99	24.91	46.00	-21.09	220	100	peak
3	369.4047	32.23	-4.58	27.65	46.00	-18.35	57	100	peak
4	614.2142	32.02	0.91	32.93	46.00	-13.07	229	100	peak

Test Channel	Middle	Polarity:	Vertical
--------------	--------	-----------	----------

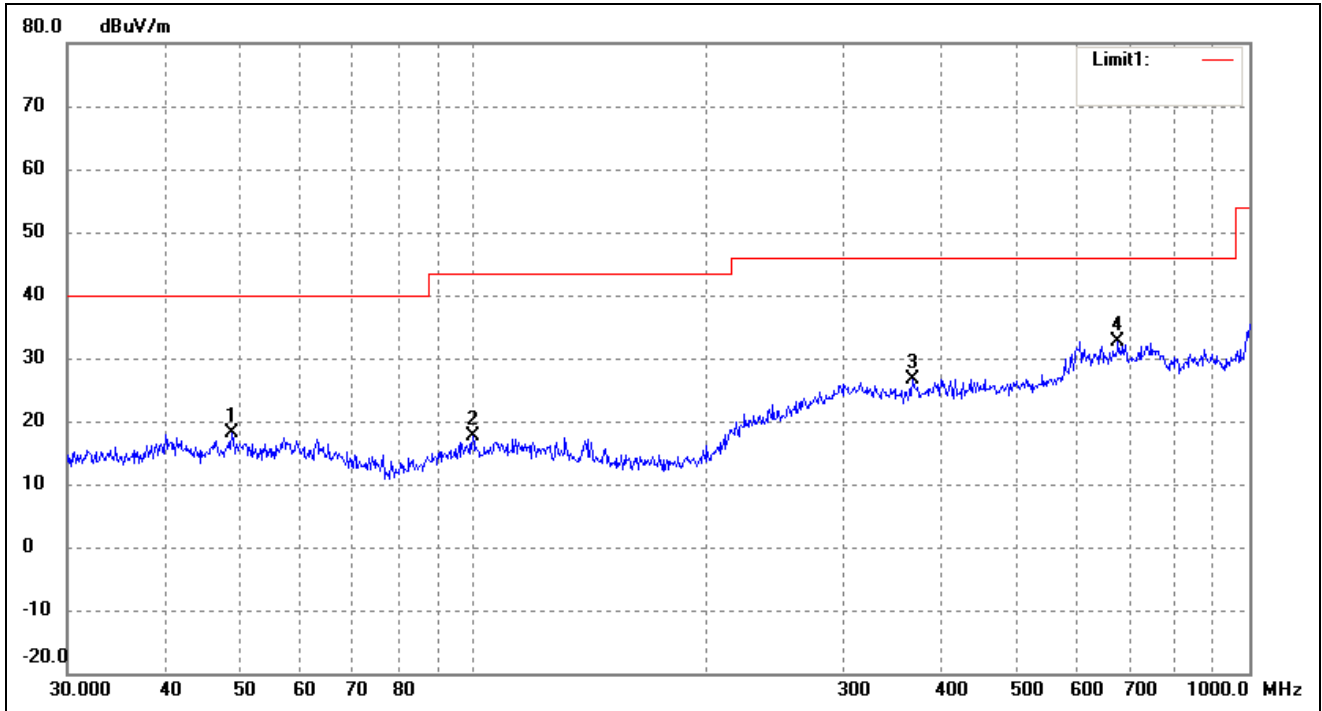


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	48.8429	36.69	-18.59	18.10	40.00	-21.90	88	100	peak
2	99.8777	35.77	-18.12	17.65	43.50	-25.85	126	100	peak
3	368.1116	35.04	-8.34	26.70	46.00	-19.30	146	100	peak
4	677.5798	35.49	-2.77	32.72	46.00	-13.28	115	100	peak

Test Channel	High	Polarity:	Horizontal
--------------	------	-----------	------------

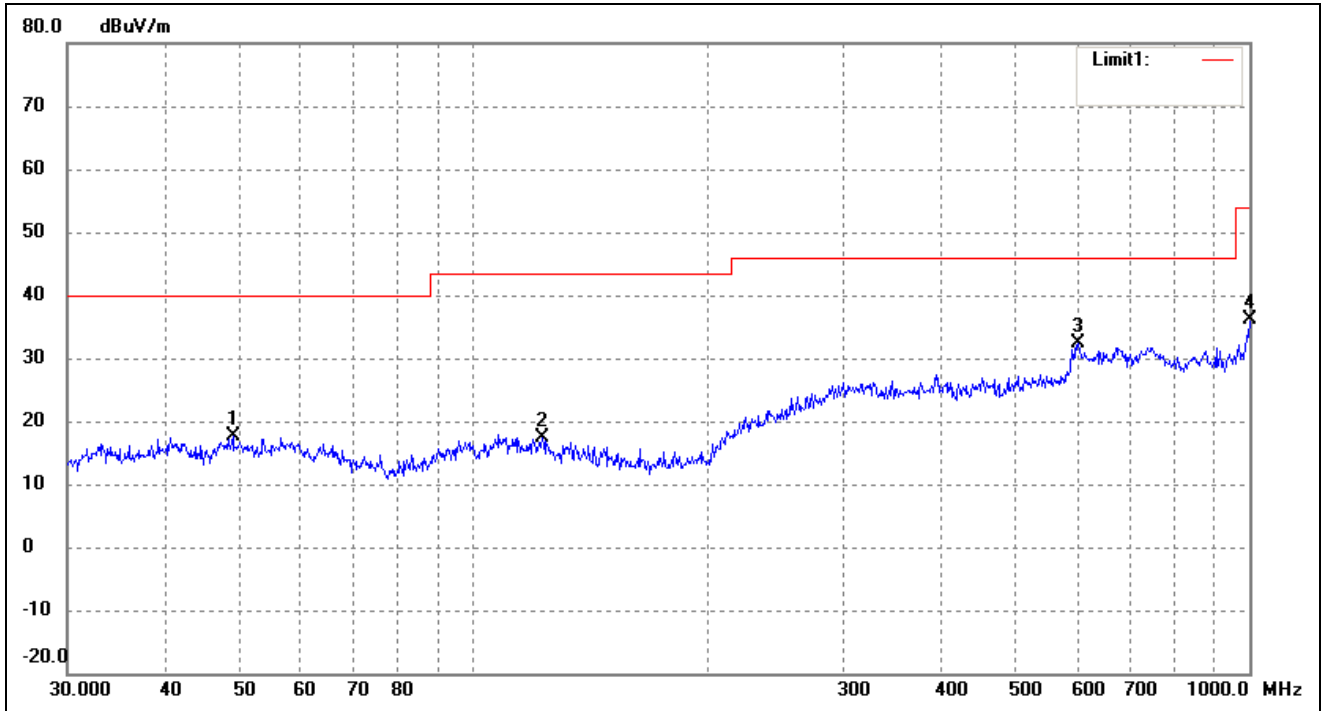

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	49.0145	36.16	-18.59	17.57	40.00	-22.43	299	100	peak
2	122.8340	35.32	-18.04	17.28	43.50	-26.22	145	100	peak
3	601.4265	34.92	-2.66	32.26	46.00	-13.74	75	100	peak
4	1000.0000	36.98	-0.89	36.09	54.00	-17.91	143	100	peak

Test Channel	High	Polarity:	Vertical
--------------	------	-----------	----------

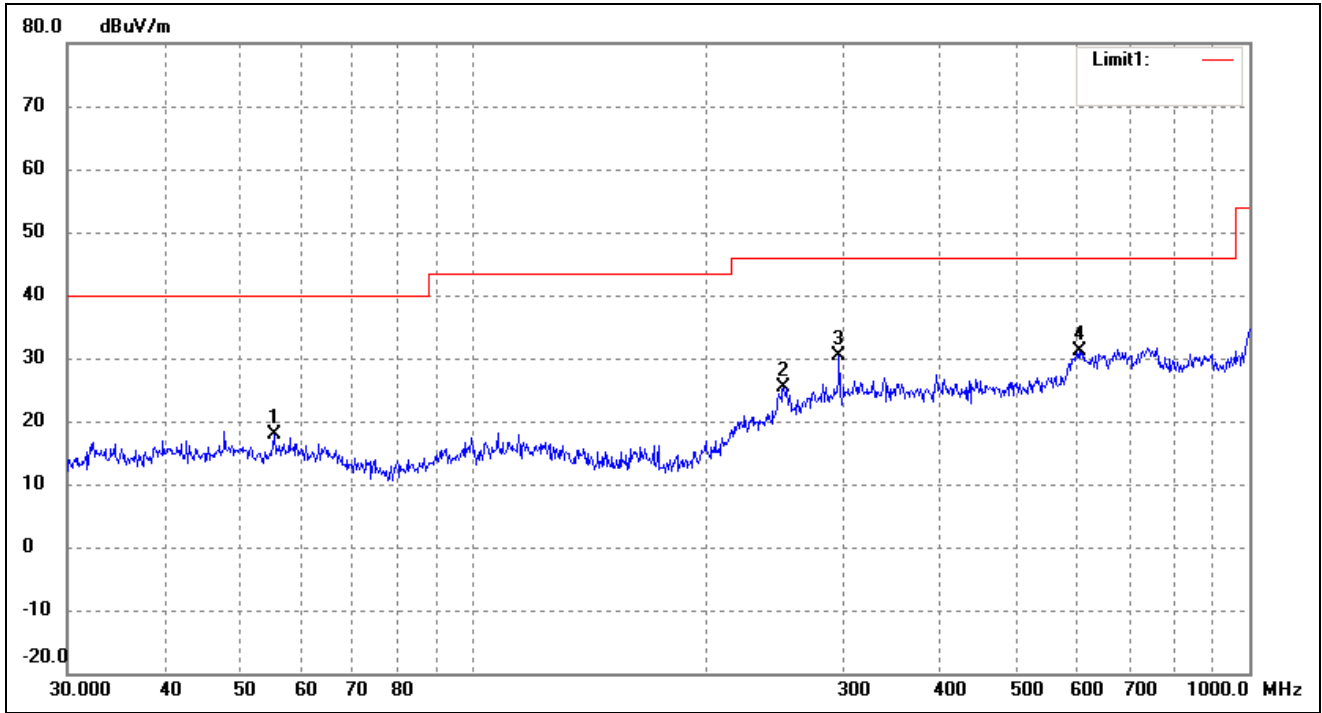

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	55.4147	33.48	-15.61	17.87	40.00	-22.13	311	100	peak
2	251.1804	33.13	-7.75	25.38	46.00	-20.62	209	100	peak
3	296.1836	34.81	-4.50	30.31	46.00	-15.69	86	100	peak
4	603.5392	29.45	1.66	31.11	46.00	-14.89	243	100	peak

## ➤ Spurious Emissions Below 1GHz

## ➤ Model: MDT750

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2402MHz							
4804	54.55	-3.59	50.96	74	-23.04	H	PK
4804	41.82	-3.59	38.23	54	-15.77	H	AV
7206	59.09	-0.52	58.57	74	-15.43	H	PK
7206	41.82	-0.52	41.30	54	-12.70	H	AV
4804	55.45	-3.59	51.86	74	-22.14	V	PK
4804	49.09	-3.59	45.50	54	-8.50	V	AV
7206	57.27	-0.52	56.75	74	-17.25	V	PK
7206	43.64	-0.52	43.12	54	-10.88	V	AV
Middle Channel-2440MHz							
4880	58.18	-3.49	54.69	74	-19.31	H	PK
4880	44.55	-3.49	41.06	54	-12.94	H	AV
7320	58.18	-0.47	57.71	74	-16.29	H	PK
7320	49.09	-0.47	48.62	54	-5.38	H	AV
4880	59.09	-3.49	55.60	74	-18.40	V	PK
4880	40.00	-3.49	36.51	54	-17.49	V	AV
7320	58.18	-0.47	57.71	74	-16.29	V	PK
7320	40.00	-0.47	39.53	54	-14.47	V	AV
High Channel-2480MHz							
4960	59.09	-3.41	55.68	74	-18.32	H	PK
4960	47.27	-3.41	43.86	54	-10.14	H	AV
7440	55.45	-0.42	55.03	74	-18.97	H	PK
7440	50.00	-0.42	49.58	54	-4.42	H	AV
4960	52.73	-3.41	49.32	74	-24.68	V	PK
4960	49.09	-3.41	45.68	54	-8.32	V	AV
7440	54.55	-0.42	54.13	74	-19.87	V	PK
7440	42.73	-0.42	42.31	54	-11.69	V	AV

## &gt; Model: MDT850

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2402MHz							
4804	59.53	-3.59	55.94	74	-18.06	H	PK
4804	40.09	-3.59	36.5	54	-17.5	H	AV
7206	58.97	-0.52	58.45	74	-15.55	H	PK
7206	38.46	-0.52	37.94	54	-16.06	H	AV
4804	60.34	-3.59	56.75	74	-17.25	V	PK
4804	38.46	-3.59	34.87	54	-19.13	V	AV
7206	61.71	-0.52	61.19	74	-12.81	V	PK
7206	41.92	-0.52	41.4	54	-12.6	V	AV
Middle Channel-2440MHz							
4880	58.35	-3.49	54.86	74	-19.14	H	PK
4880	41.9	-3.49	38.41	54	-15.59	H	AV
7320	58.48	-0.47	58.01	74	-15.99	H	PK
7320	39.87	-0.47	39.4	54	-14.6	H	AV
4880	58.51	-3.49	55.02	74	-18.98	V	PK
4880	40.71	-3.49	37.22	54	-16.78	V	AV
7320	59.37	-0.47	58.9	74	-15.1	V	PK
7320	40.03	-0.47	39.56	54	-14.44	V	AV
High Channel-2480MHz							
4960	59.36	-3.41	55.95	74	-18.05	H	PK
4960	38.12	-3.41	34.71	54	-19.29	H	AV
7440	61.71	-0.42	61.29	74	-12.71	H	PK
7440	38.45	-0.42	38.03	54	-15.97	H	AV
4960	58.2	-3.41	54.79	74	-19.21	V	PK
4960	40.42	-3.41	37.01	54	-16.99	V	AV
7440	59.56	-0.42	59.14	74	-14.86	V	PK
7440	41.65	-0.42	41.23	54	-12.77	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

---

## 9. Out of Band Emissions

---

### 9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 9.2 Test Procedure

According to the KDB 558074 D01 v04, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 v04, the conducted spurious emissions test method as follows:

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW  $\geq$  300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.



### 9.3 Summary of Test Results/Plots


- Radiated test
- Model: MDT750

Test Channel	Low	Polarity:	Vertical(worst case)
--------------	-----	-----------	----------------------

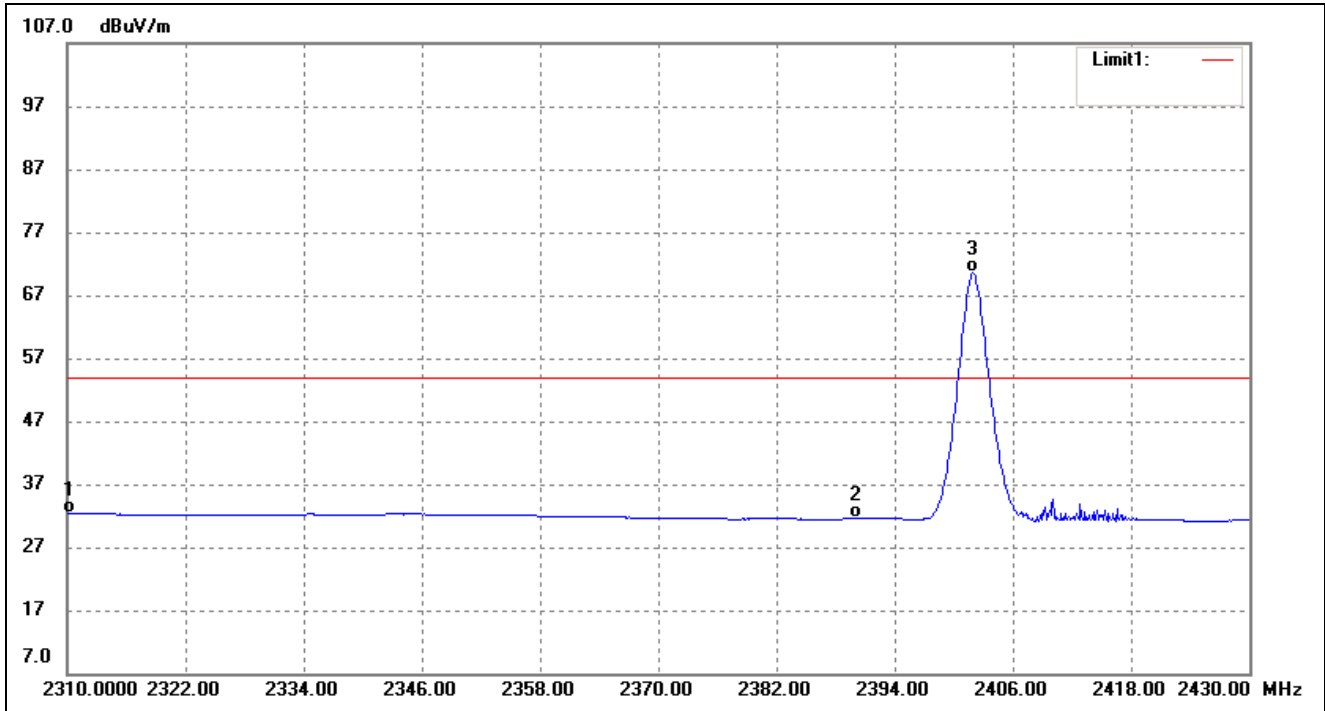

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	37.64	-5.28	32.36	54.00	-21.64	Average Detector
	2310.000	48.83	-5.28	43.55	74.00	-30.45	Peak Detector
2	2390.000	37.69	-6.12	31.57	54.00	-22.43	Average Detector
	2390.000	49.44	-6.12	43.32	74.00	-30.68	Peak Detector
3	2401.920	76.77	-6.24	70.53	/	/	Average Detector
	2402.280	93.36	-6.24	87.12	/	/	Peak Detector


Test Channel	High	Polarity:	Vertical(worst case)
--------------	------	-----------	----------------------

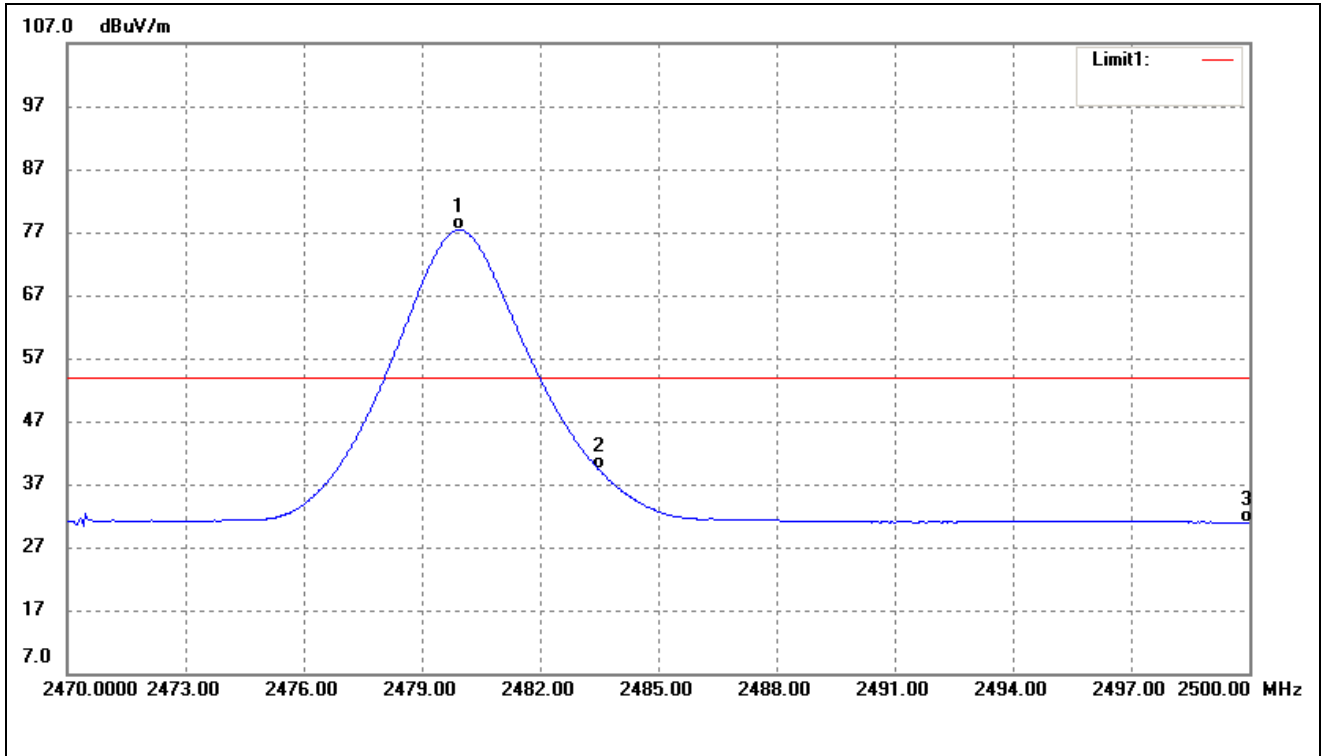

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.930	83.48	-6.08	77.40	/	/	Average Detector
	2479.840	99.96	-6.08	93.88	/	/	Peak Detector
2	2483.500	45.35	-6.08	39.27	54.00	-14.73	Average Detector
	2483.500	60.78	-6.08	54.70	74.00	-19.30	Peak Detector
3	2500.000	36.95	-6.04	30.91	54.00	-23.09	Average Detector
	2500.000	49.20	-6.04	43.16	74.00	-30.84	Peak Detector


➤ Model: MDT850

Test Channel	Low	Polarity:	Vertical(worst case)
--------------	-----	-----------	----------------------

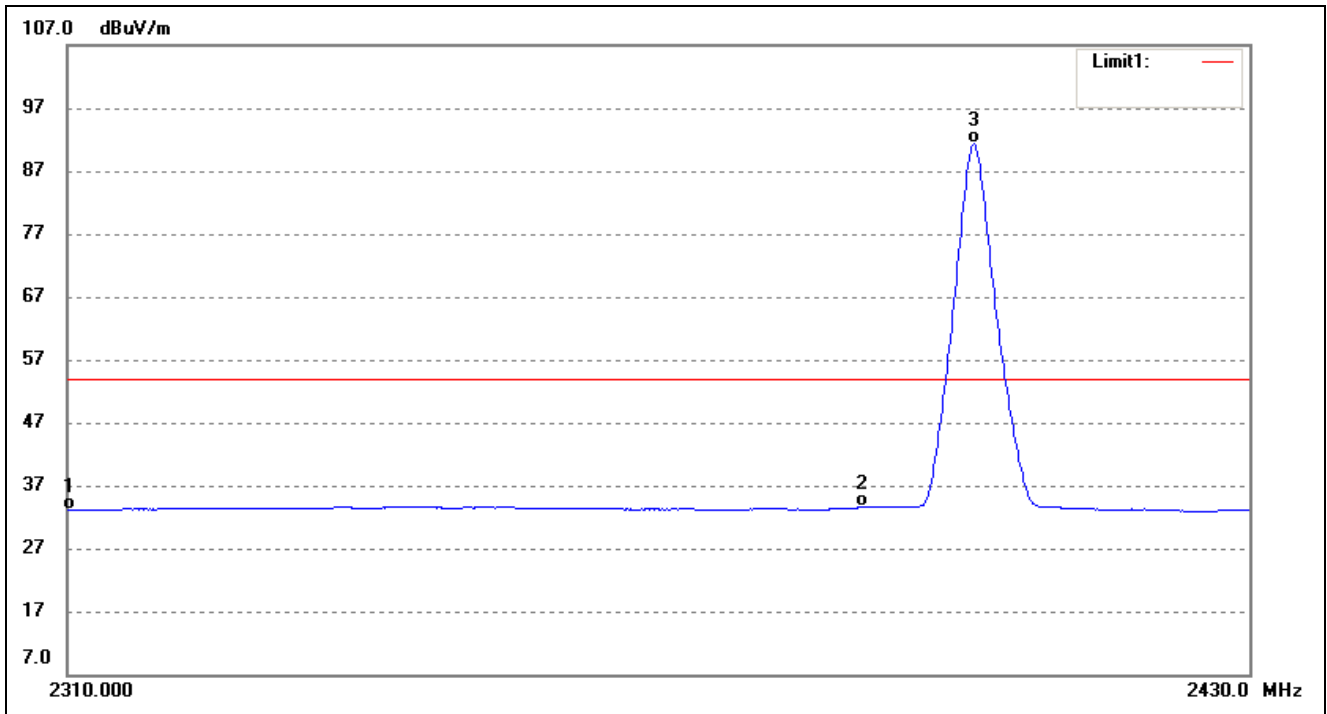


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.93	-7.78	33.15	54.00	-20.85	Average Detector
	2310.000	53.15	-7.78	45.37	74.00	-28.63	Peak Detector
2	2390.000	40.85	-7.32	33.53	54.00	-20.47	Average Detector
	2390.000	53.32	-7.32	46.00	74.00	-28.00	Peak Detector
3	2401.494	98.55	-7.25	91.30	/	/	Average Detector
	2401.616	104.34	-7.25	97.09	/	/	Peak Detector

Test Channel	High	Polarity:	Vertical(worst case)
--------------	------	-----------	----------------------


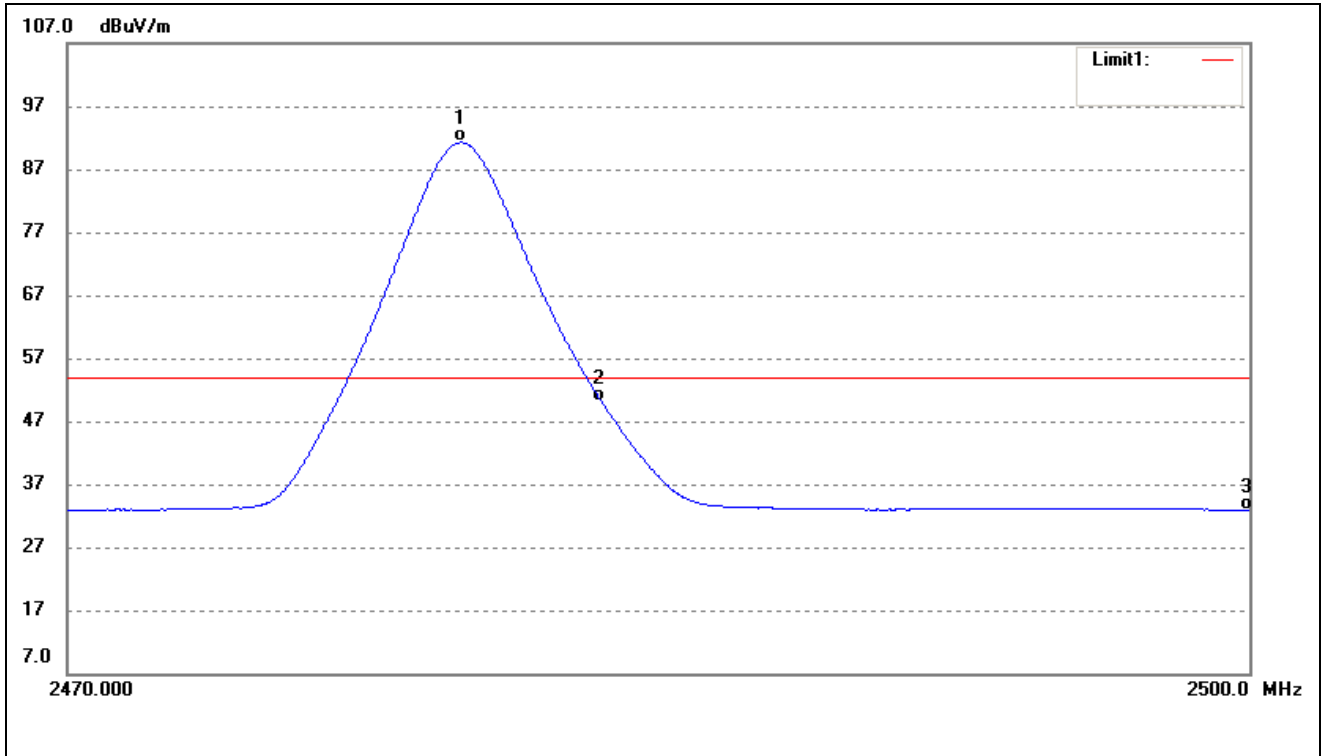


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.950	98.07	-6.79	91.28	/	/	Average Detector
	2480.070	107.86	-6.78	101.08	/	/	Peak Detector
2	2483.500	56.89	-6.77	50.12	54.00	-3.88	Average Detector
	2483.500	69.14	-6.77	62.37	74.00	-11.63	Peak Detector
3	2500.000	39.59	-6.67	32.92	54.00	-21.08	Average Detector
	2500.000	52.13	-6.67	45.46	74.00	-28.54	Peak Detector



➤ Conducted test

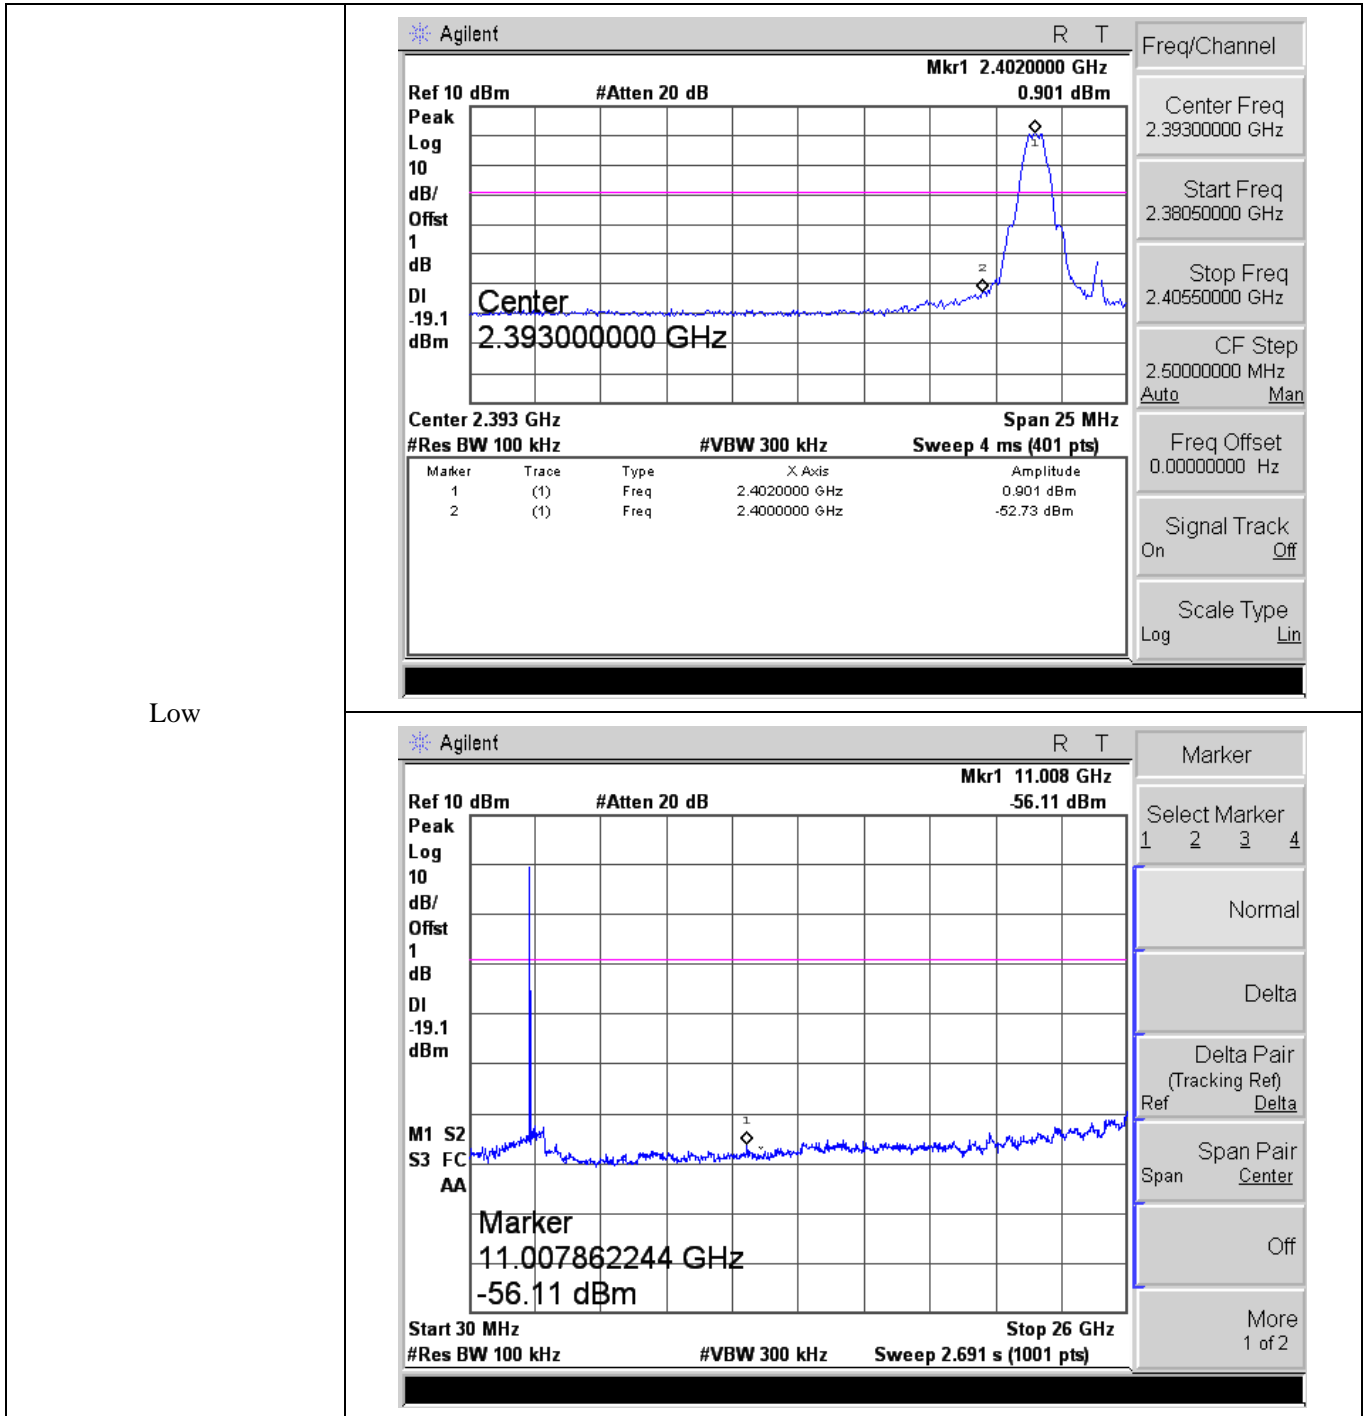

Middle

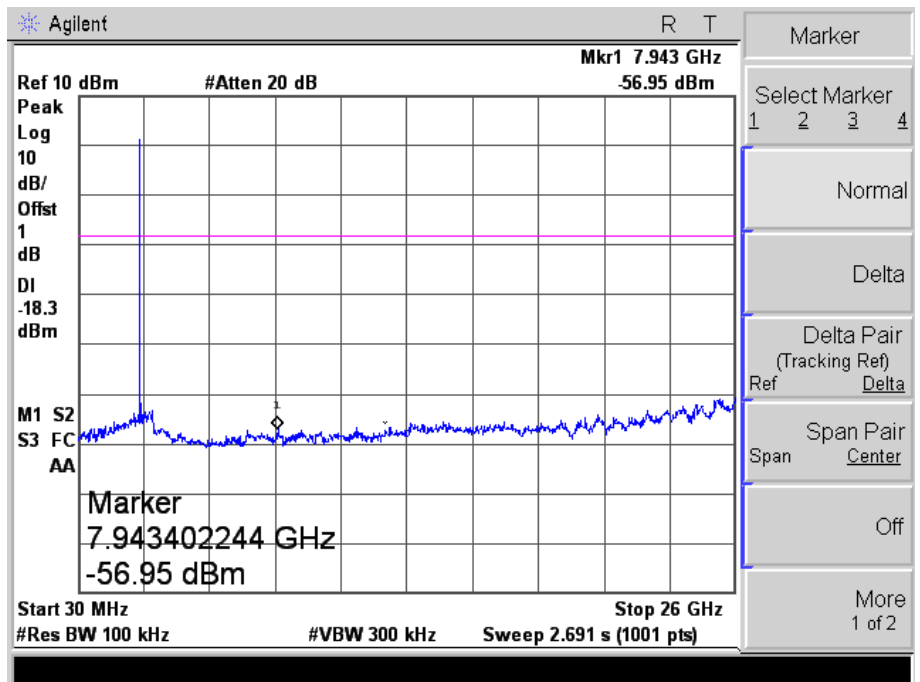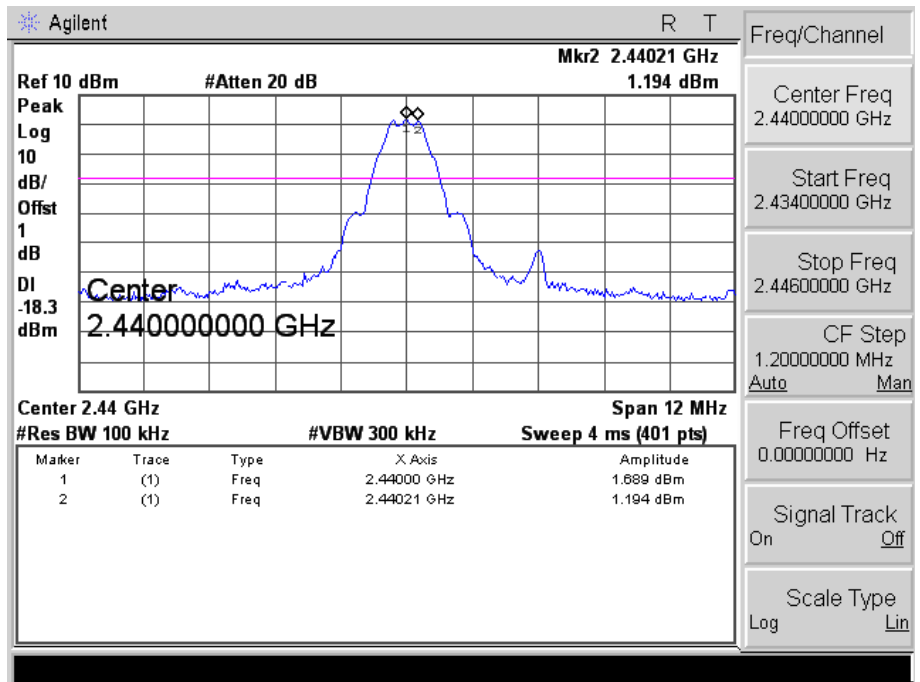

High

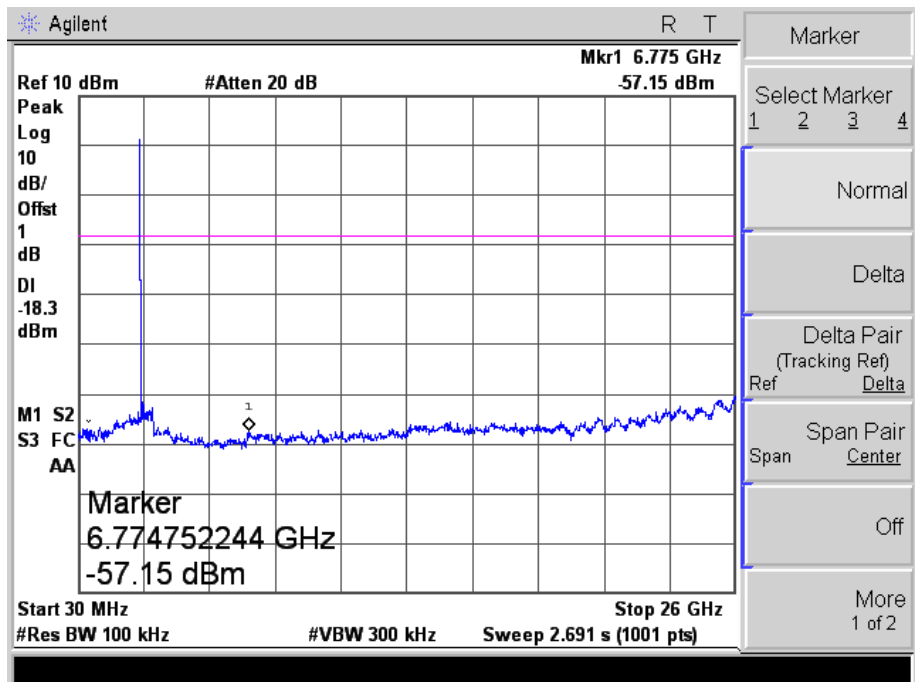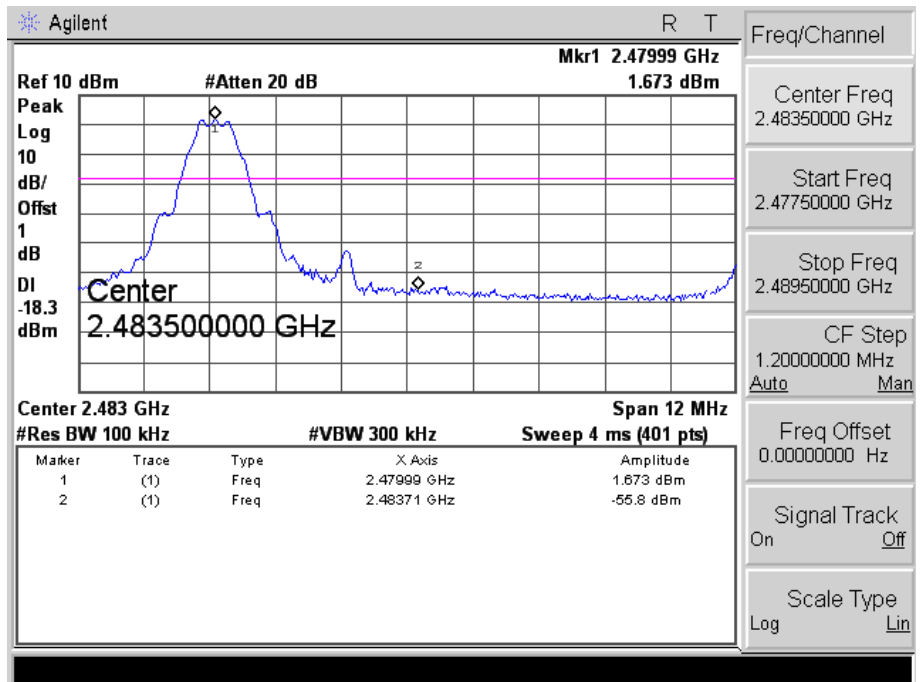

\*\*\*\*\* END OF REPORT \*\*\*\*\*