

# TEST REPORT

**Reference No.** ..... : WTU16S0242999E  
**FCC ID**..... : 2AHAK-WD50UT4490  
**Applicant**..... : KUNSHAN KONKA ELECTRONIC CO.,LTD  
**Address** ..... : No.189 East Qianjin Road, Kunshan, P.R. China  
**Manufacturer** ..... : KUNSHAN KONKA ELECTRONIC CO.,LTD  
**Address** ..... : No.189 East Qianjin Road, Kunshan, P.R. China  
**Product Name** ..... : LCD TV  
**Model No.** ..... : WD50UT4490, WD50UW4490  
**Standards**..... : FCC CFR47 Part 15 C Section 15.247:2015  
**Date of Receipt sample**..... : Feb. 17, 2016  
**Date of Test**..... : Feb. 18 – Mar. 15, 2016  
**Date of Issue** ..... : Mar.16, 2016  
**Test Result** ..... : **Pass**

**Remarks:**

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.  
The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Services (Shenzhen) Co., Ltd.**

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:



Zero Zhou / Test Engineer

Approved by:



Philo Zhong / Manager

## 2 Test Summary

<b>Test Items</b>	<b>Test Requirement</b>	<b>Result</b>
Conducted Emissions	15.207(a)	PASS
Radiated Emissions	15.247 15.205(a) 15.209(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

### 3 Contents

	<b>Page</b>
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 TEST SUMMARY .....</b>	<b>2</b>
<b>3 CONTENTS .....</b>	<b>3</b>
<b>4 GENERAL INFORMATION.....</b>	<b>5</b>
4.1 GENERAL DESCRIPTION OF E.U.T. ....	5
4.2 DETAILS OF E.U.T. ....	5
4.3 CHANNEL LIST .....	5
4.4 TEST MODE .....	6
4.5 TEST FACILITY .....	7
<b>5 EQUIPMENT USED DURING TEST .....</b>	<b>8</b>
5.1 EQUIPMENTS LIST .....	8
5.2 DESCRIPTION OF SUPPORT UNITS .....	9
5.3 MEASUREMENT UNCERTAINTY .....	9
5.4 TEST EQUIPMENT CALIBRATION .....	9
<b>6 CONDUCTED EMISSION .....</b>	<b>10</b>
6.1 E.U.T. OPERATION .....	10
6.2 EUT SETUP .....	10
6.3 MEASUREMENT DESCRIPTION .....	10
6.4 CONDUCTED EMISSION TEST RESULT .....	11
<b>7 RADIATED EMISSIONS.....</b>	<b>13</b>
7.1 EUT OPERATION.....	13
7.2 TEST SETUP .....	14
7.3 SPECTRUM ANALYZER SETUP .....	15
7.4 TEST PROCEDURE .....	16
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	16
7.6 SUMMARY OF TEST RESULTS .....	17
<b>8 BAND EDGE MEASUREMENT .....</b>	<b>35</b>
8.1 TEST PROCEDURE.....	35
8.2 TEST RESULT .....	36
<b>9 6 DB BANDWIDTH MEASUREMENT .....</b>	<b>44</b>
9.1 TEST PROCEDURE: .....	44
9.2 TEST RESULT: .....	44
<b>10 MAXIMUM PEAK OUTPUT POWER.....</b>	<b>57</b>
10.1 TEST PROCEDURE:.....	57
10.2 TEST RESULT: .....	57
<b>11 POWER SPECTRAL DENSITY .....</b>	<b>70</b>
11.1 TEST PROCEDURE:.....	70
11.2 TEST RESULT: .....	70
<b>12 ANTENNA REQUIREMENT .....</b>	<b>83</b>
<b>13 RF EXPOSURE.....</b>	<b>84</b>
13.1 REQUIREMENTS.....	84
13.2 THE PROCEDURES / LIMIT .....	84
13.3 MPE CALCULATION METHOD .....	85
<b>14 PHOTOGRAPHS – MODEL WD50UT4490 TEST SETUP.....</b>	<b>86</b>
14.1 CONDUCTED EMISSION .....	86
14.2 RADIATED EMISSION .....	86

<b>15</b>	<b>PHOTOGRAPHS - CONSTRUCTIONAL DETAILS .....</b>	<b>88</b>
15.1	MODEL WD50UT4490 – EXTERNAL VIEW .....	88
15.2	MODEL WD50UT4490– INTERNAL VIEW .....	92

## 4 General Information

### 4.1 General Description of E.U.T.

Product Name:	LCD TV
Model No.:	WD50UT4490, WD50UT4490
Model Description:	Only model names are different
Operation Frequency:	802.11b/g/n HT20: 2412MHz ~ 2462MHz, 802.11n HT40: 2422MHz~2452MHz
The Lowest Oscillator:	16MHz
Antenna Gain:	3dBi
Type of modulation:	IEEE 802.11b (CCK/QPSK/BPSK,11Mbps max.) IEEE 802.11g (BPSK/QPSK/16QAM/64QAM,54Mbps max.) IEEE 802.11n (BPSK/QPSK/16QAM/64QAM,HT20:72Mbps max., HT40:150Mbps max.)
Number of transmitter chains:	WIFI:2*2 (MIMO)

The device supports MIMO 2\*2, and the MIMO works with STBC(Space-Time Block Coding).The antenna is omnidirectional, does not support any directional gain in any modes.

MIMO rate, antennas use two different streams, from this side, if RX side need to decode MIMO, data between the two stream should be correlated.

TX power for MIMO rate, the wifi chip has a power/rate table that controls TX power from chipout, it's preset in nvr, FW don't need to calculate it again when MIMO rate is fixed. Of course the real radiation power is also related to antenna efficient.

### 4.2 Details of E.U.T.

Technical Data: AC 120V~60Hz, 100W

### 4.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

#### 4.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Power Spectral Density	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Frequency Range	802.11b	11 Mbps	1/11	TX
	802.11g	54 Mbps	1/11	TX
	802.11n HT20	108 Mbps	1/11	TX
	802.11n HT40	150 Mbps	3/9	TX
Transmitter Spurious Emissions	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX

**Note** :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

Table 2 Tests Carried Out Under FCC part 15.207 &amp; FCC part 15.209

Test Item	Test Mode
Conduction Emission, 0.15MHz to 30MHz	Communication

#### 4.5 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A-1**

Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A-1, July 12, 2012.

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

## 5 Equipment Used during Test

### 5.1 Equipments List

<b>Conducted Emissions Test Site 1#</b>						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.14,2015	Sep.13,2016
2.	LISN	R&S	ENV216	101215	Sep.14,2015	Sep.13,2016
3.	Cable	Top	TYPE16(3.5M)	-	Sep.14,2015	Sep.13,2016
<b>Conducted Emissions Test Site 2#</b>						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.14,2015	Sep.13,2016
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.14,2015	Sep.13,2016
3.	Limitter	York	MTS-IMP-136	261115-001-0024	Sep.14,2015	Sep.13,2016
4.	Cable	LARGE	RF300	-	Sep.14,2015	Sep.13,2016
<b>3m Semi-anechoic Chamber for Radiation Emissions Test site 1#</b>						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.14,2015	Sep.13,2016
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.14,2015	Sep.13,2016
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Sep.14,2015	Sep.13,2016
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.14,2015	Sep.13,2016
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Sep.14,2015	Sep.13,2016
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Sep.14,2015	Sep.13,2016
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Sep.14,2015	Sep.13,2016
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Sep.14,2015	Sep.13,2016
<b>3m Semi-anechoic Chamber for Radiation Emissions Test site 2#</b>						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	Sep.14,2015	Sep.13,2016
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Sep.14,2015	Sep.13,2016
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Sep.14,2015	Sep.13,2016
4	Cable	HUBER+SUHNER	CBL2	525178	Sep.14,2015	Sep.13,2016
<b>RF Conducted Testing</b>						

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.14,2015	Sep.13,2016
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.14,2015	Sep.13,2016
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.14,2015	Sep.13,2016

## 5.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

## 5.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	$\pm 1.0$ dB
RF Power Density	$\pm 2.2$ dB
Radiated Spurious Emissions test	$\pm 5.03$ dB (30M~1000MHz)
	$\pm 5.47$ dB (1000M~25000MHz)
Conducted Spurious Emissions test	$\pm 3.64$ dB (AC mains 150KHz~30MHz)

## 5.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

## 6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB $\mu$ V between 0.15MHz & 0.5MHz 56 dB $\mu$ V between 0.5MHz & 5MHz 60 dB $\mu$ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

### 6.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.

### 6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10.

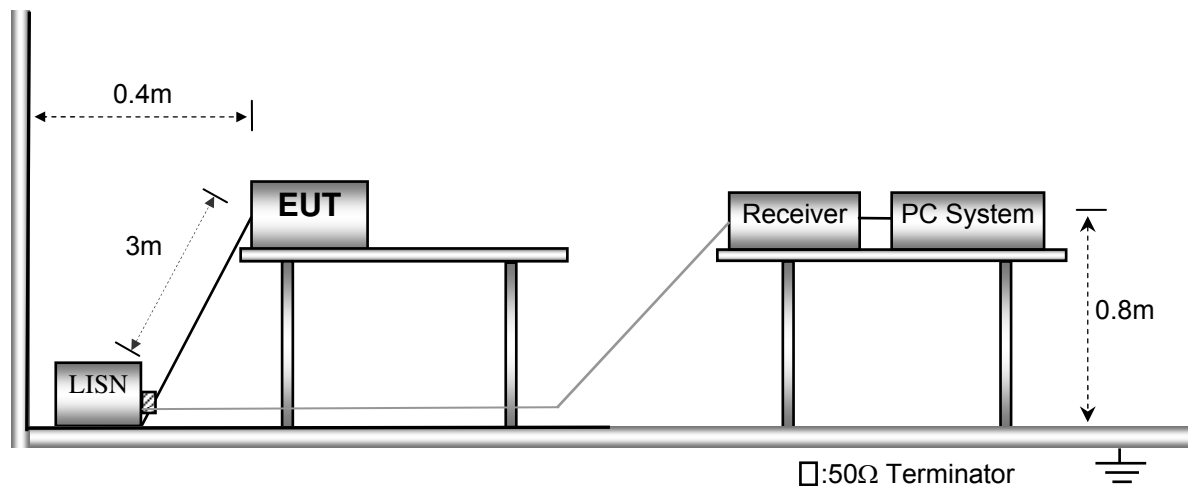


### 6.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

### 6.4 Conducted Emission Test Result


An initial pre-scan was performed on the live and neutral lines.

Live line:

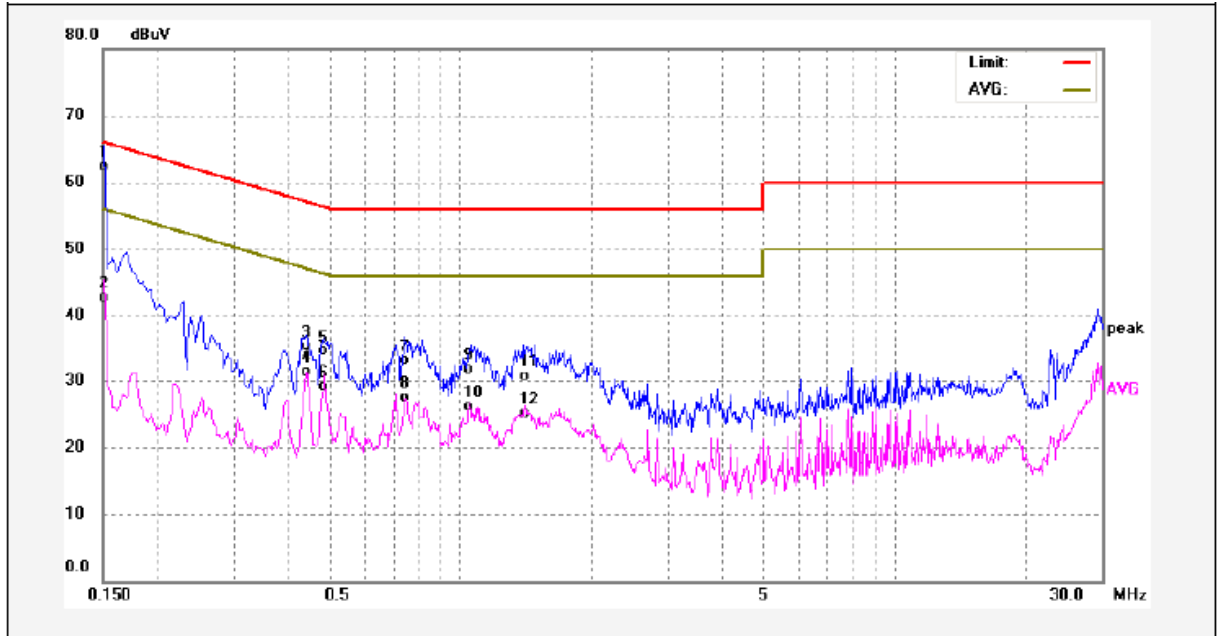

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	52.17	10.10	62.27	65.99	-3.72	QP	
2	0.1500	32.58	10.10	42.68	55.99	-13.31	AVG	
3	0.4420	25.20	10.12	35.32	57.02	-21.70	QP	
4	0.4420	21.27	10.12	31.39	47.02	-15.63	AVG	
5	0.4820	24.45	10.12	34.57	56.30	-21.73	QP	
6	0.4820	19.08	10.12	29.20	46.30	-17.10	AVG	
7	0.7460	22.91	10.18	33.09	56.00	-22.91	QP	
8	0.7460	17.35	10.18	27.53	46.00	-18.47	AVG	
9	1.0580	21.59	10.21	31.80	56.00	-24.20	QP	
10	1.0580	15.90	10.21	26.11	46.00	-19.89	AVG	
11	1.3940	20.50	10.20	30.70	56.00	-25.30	QP	
12	1.3940	14.97	10.20	25.17	46.00	-20.83	AVG	

Neutral line:

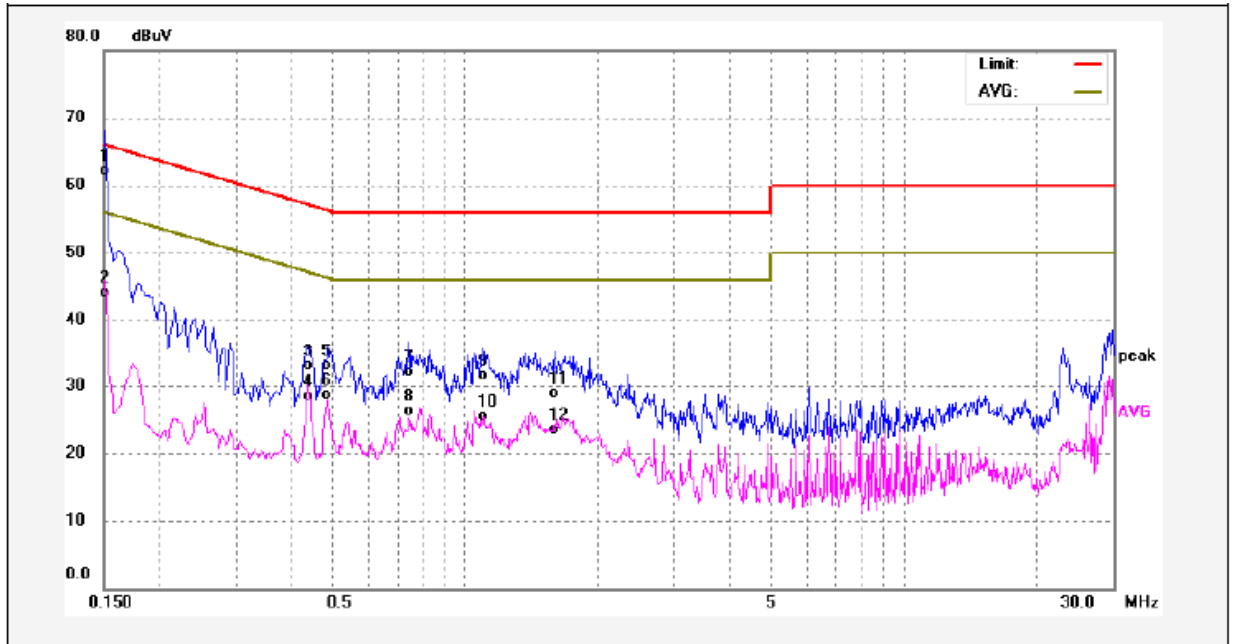

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	52.10	10.10	62.20	65.99	-3.79	QP	
2	0.1500	34.03	10.10	44.13	55.99	-11.86	AVG	
3	0.4380	22.98	10.12	33.10	57.10	-24.00	QP	
4	0.4380	18.37	10.12	28.49	47.10	-18.61	AVG	
5	0.4860	23.03	10.12	33.15	56.24	-23.09	QP	
6	0.4860	18.55	10.12	28.67	46.24	-17.57	AVG	
7	0.7460	21.95	10.18	32.13	56.00	-23.87	QP	
8	0.7460	16.20	10.18	26.38	46.00	-19.62	AVG	
9	1.0940	21.20	10.21	31.41	56.00	-24.59	QP	
10	1.0940	15.30	10.21	25.51	46.00	-20.49	AVG	
11	1.5940	18.65	10.20	28.85	56.00	-27.15	QP	
12	1.5940	13.25	10.20	23.45	46.00	-22.55	AVG	

## 7 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH


Atmospheric Pressure: 101.2kPa

EUT Operation :


The test was performed in transmitting mode, the test data were shown in the report.

### 7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10  
 The test setup for emission measurement below 30MHz.

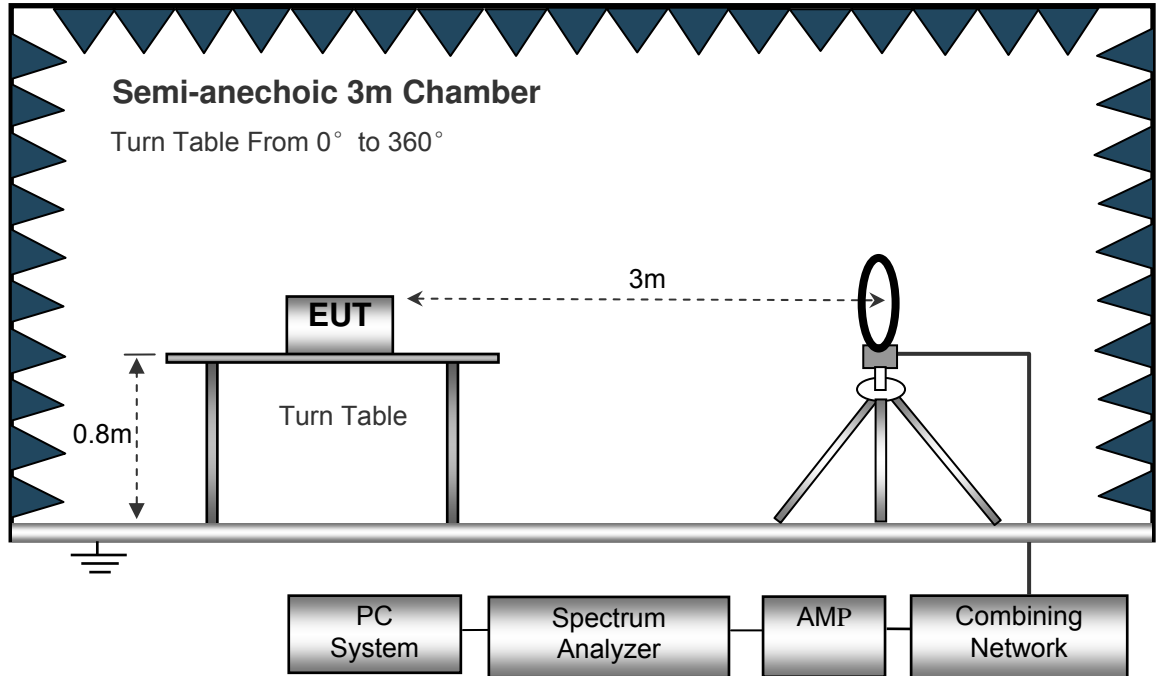


The test setup for emission measurement from 30 MHz to 1 GHz.

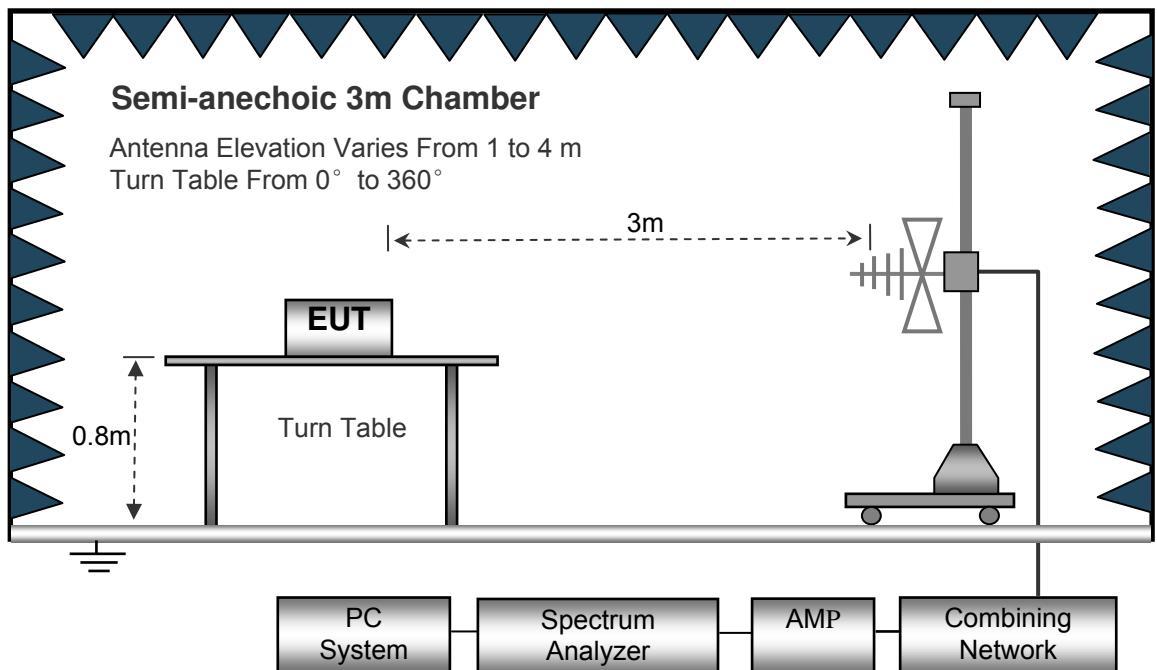

The test setup for emission measurement above 1 GHz.

The test setup for emission measurement above 1 GHz.

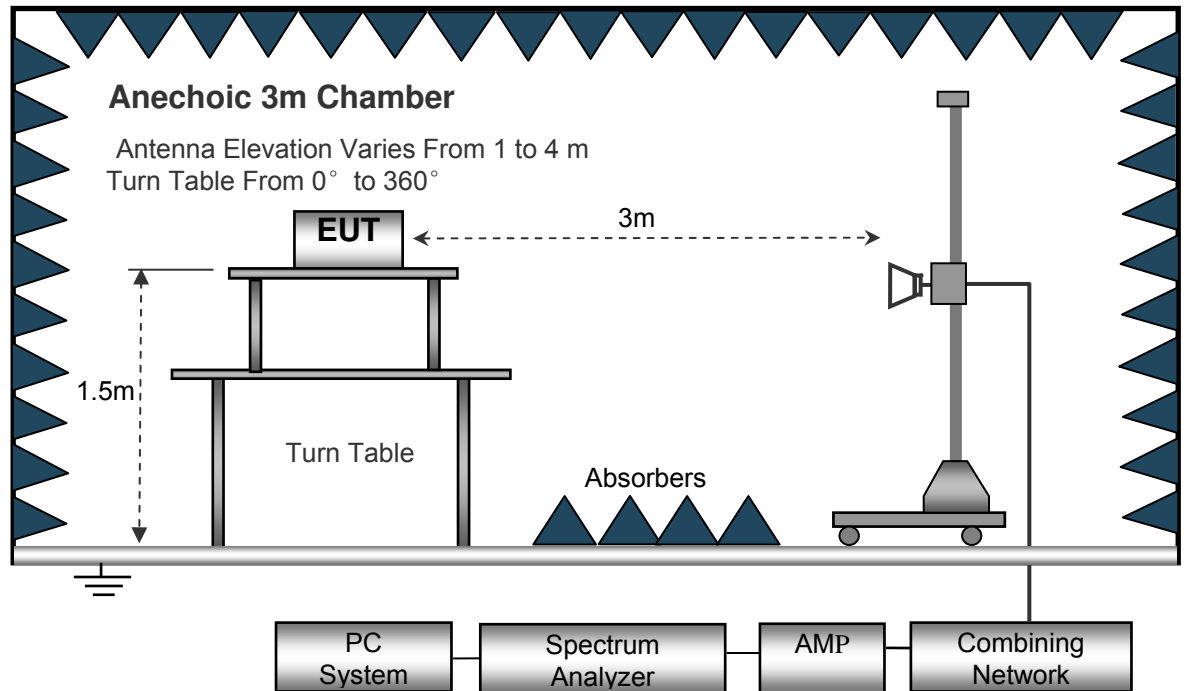

### 7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed ..... Auto  
 IF Bandwidth..... 10kHz  
 Video Bandwidth..... 10kHz  
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 100kHz  
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 3MHz  
 Detector ..... Ave.  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 10Hz

## 7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high -pass filter is used during radiated emissions above 1GHz measurement.

## 7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

## 7.6 Summary of Test Results

### Test Frequency: 16MHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

### Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
ANT0 11b: Low Channel 2412MHz									
223.45	41.05	QP	67	1.5	H	-11.62	29.43	46.00	-16.57
223.45	36.26	QP	145	1.7	V	-11.62	24.64	46.00	-21.36
4824.00	50.44	PK	70	1.6	V	-1.06	49.38	74.00	-24.62
4824.00	46.32	Ave	70	1.6	V	-1.06	45.26	54.00	-8.74
7236.00	41.08	PK	243	1.2	H	1.33	42.41	74.00	-31.59
7236.00	41.96	Ave	243	1.2	H	1.33	43.29	54.00	-10.71
2322.60	46.56	PK	152	1.3	V	-13.19	33.37	74.00	-40.63
2322.60	39.10	Ave	152	1.3	V	-13.19	25.91	54.00	-28.09
2358.50	42.25	PK	359	1.7	H	-13.14	29.11	74.00	-44.89
2358.50	37.60	Ave	359	1.7	H	-13.14	24.46	54.00	-29.54
2485.46	44.86	PK	230	1.2	V	-13.08	31.78	74.00	-42.22
2485.46	38.66	Ave	230	1.2	V	-13.08	25.58	54.00	-28.42

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
ANT0 11b: Middle Channel 2437MHz									
223.45	42.28	QP	206	1.8	H	-11.62	30.66	46.00	-15.34
223.45	36.84	QP	237	1.1	V	-11.62	25.22	46.00	-20.78
4874.00	51.05	PK	11	1.7	V	-0.62	50.43	74.00	-23.57
4874.00	45.93	Ave	11	1.7	V	-0.62	45.31	54.00	-8.69
7311.00	40.84	PK	5	1.6	H	2.21	43.05	74.00	-30.95
7311.00	43.44	Ave	5	1.6	H	2.21	45.65	54.00	-8.35
2325.66	46.38	PK	40	1.7	V	-13.19	33.19	74.00	-40.81
2325.66	37.14	Ave	40	1.7	V	-13.19	23.95	54.00	-30.05
2356.88	44.19	PK	52	1.3	H	-13.14	31.05	74.00	-42.95
2356.88	36.93	Ave	52	1.3	H	-13.14	23.79	54.00	-30.21
2496.67	42.71	PK	143	1.3	V	-13.08	29.63	74.00	-44.37
2496.67	38.58	Ave	143	1.3	V	-13.08	25.50	54.00	-28.50

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
ANT0 11b: High Channel 2462MHz									
223.45	41.91	QP	132	1.9	H	-11.62	30.29	46.00	-15.71
223.45	36.43	QP	318	1.4	V	-11.62	24.81	46.00	-21.19
4924.00	51.49	PK	290	1.9	V	-0.24	51.25	74.00	-22.75
4924.00	44.93	Ave	290	1.9	V	-0.24	44.69	54.00	-9.31
7386.00	40.15	PK	102	1.9	H	2.84	42.99	74.00	-31.01
7386.00	44.83	Ave	102	1.9	H	2.84	47.67	54.00	-6.33
2315.19	46.60	PK	28	1.3	V	-13.19	33.41	74.00	-40.59
2315.19	38.25	Ave	28	1.3	V	-13.19	25.06	54.00	-28.94
2378.27	44.55	PK	39	2.0	H	-13.14	31.41	74.00	-42.59
2378.27	38.41	Ave	39	2.0	H	-13.14	25.27	54.00	-28.73
2485.52	43.98	PK	52	1.4	V	-13.08	30.90	74.00	-43.10
2485.52	36.61	Ave	52	1.4	V	-13.08	23.53	54.00	-30.47

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
ANT1 11b: Low Channel 2412MHz									
223.45	39.09	QP	157	1.5	H	-11.62	27.47	46.00	-18.53
223.45	35.89	QP	66	1.5	V	-11.62	24.27	46.00	-21.73
4824.00	52.38	PK	252	1.8	V	-1.06	51.32	74.00	-22.68
4824.00	45.97	Ave	252	1.8	V	-1.06	44.91	54.00	-9.09
7236.00	41.40	PK	47	1.3	H	1.33	42.73	74.00	-31.27
7236.00	42.94	Ave	47	1.3	H	1.33	44.27	54.00	-9.73
2339.78	45.24	PK	196	1.3	V	-13.19	32.05	74.00	-41.95
2339.78	39.70	Ave	196	1.3	V	-13.19	26.51	54.00	-27.49
2385.05	42.25	PK	202	1.8	H	-13.14	29.11	74.00	-44.89
2385.05	37.00	Ave	202	1.8	H	-13.14	23.86	54.00	-30.14
2492.40	42.02	PK	140	1.8	V	-13.08	28.94	74.00	-45.06
2492.40	37.34	Ave	140	1.8	V	-13.08	24.26	54.00	-29.74

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
ANT1 11b: Middle Channel 2437MHz									
223.45	39.34	QP	146	1.9	H	-11.62	27.72	46.00	-18.28
223.45	37.13	QP	35	1.5	V	-11.62	25.51	46.00	-20.49
4874.00	53.63	PK	266	1.2	V	-0.62	53.01	74.00	-20.99
4874.00	46.67	Ave	266	1.2	V	-0.62	46.05	54.00	-7.95
7311.00	42.14	PK	192	1.2	H	2.21	44.35	74.00	-29.65
7311.00	41.74	Ave	192	1.2	H	2.21	43.95	54.00	-10.05
2331.62	46.22	PK	324	1.1	V	-13.19	33.03	74.00	-40.97
2331.62	39.37	Ave	324	1.1	V	-13.19	26.18	54.00	-27.82
2377.12	44.96	PK	39	1.3	H	-13.14	31.82	74.00	-42.18
2377.12	37.02	Ave	39	1.3	H	-13.14	23.88	54.00	-30.12
2492.98	43.21	PK	232	1.9	V	-13.08	30.13	74.00	-43.87
2492.98	36.55	Ave	232	1.9	V	-13.08	23.47	54.00	-30.53

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
ANT1 11b: High Channel 2462MHz									
223.45	40.41	QP	186	1.4	H	-11.62	28.79	46.00	-17.21
223.45	38.04	QP	211	2.0	V	-11.62	26.42	46.00	-19.58
4924.00	52.77	PK	11	1.7	V	-0.24	52.53	74.00	-21.47
4924.00	45.99	Ave	11	1.7	V	-0.24	45.75	54.00	-8.25
7386.00	42.53	PK	334	1.7	H	2.84	45.37	74.00	-28.63
7386.00	42.65	Ave	334	1.7	H	2.84	45.49	54.00	-8.51
2349.69	46.78	PK	16	1.4	V	-13.19	33.59	74.00	-40.41
2349.69	38.01	Ave	16	1.4	V	-13.19	24.82	54.00	-29.18
2381.76	42.58	PK	116	1.7	H	-13.14	29.44	74.00	-44.56
2381.76	38.59	Ave	116	1.7	H	-13.14	25.45	54.00	-28.55
2492.87	42.71	PK	325	1.8	V	-13.08	29.63	74.00	-44.37
2492.87	38.41	Ave	325	1.8	V	-13.08	25.33	54.00	-28.67

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
ANT0 11g: Low Channel 2412MHz									
223.45	43.09	QP	128	1.5	H	-11.62	31.47	46.00	-14.53
223.45	36.16	QP	39	1.9	V	-11.62	24.54	46.00	-21.46
4824.00	51.70	PK	135	1.6	V	-1.06	50.64	74.00	-23.36
4824.00	45.50	Ave	135	1.6	V	-1.06	44.44	54.00	-9.56
7236.00	39.02	PK	266	1.1	H	1.33	40.35	74.00	-33.65
7236.00	46.29	Ave	266	1.1	H	1.33	47.62	54.00	-6.38
2310.16	45.14	PK	331	1.6	V	-13.19	31.95	74.00	-42.05
2310.16	37.73	Ave	331	1.6	V	-13.19	24.54	54.00	-29.46
2363.95	43.23	PK	38	1.0	H	-13.14	30.09	74.00	-43.91
2363.95	37.57	Ave	38	1.0	H	-13.14	24.43	54.00	-29.57
2494.08	44.65	PK	234	1.9	V	-13.08	31.57	74.00	-42.43
2494.08	36.52	Ave	234	1.9	V	-13.08	23.44	54.00	-30.56

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
ANT0 11g: Middle Channel 2437MHz									
223.45	44.17	QP	208	1.0	H	-11.62	32.55	46.00	-13.45
223.45	36.84	QP	309	1.6	V	-11.62	25.22	46.00	-20.78
4874.00	52.15	PK	345	1.4	V	-0.62	51.53	74.00	-22.47
4874.00	45.24	Ave	345	1.4	V	-0.62	44.62	54.00	-9.38
7311.00	38.14	PK	302	1.9	H	2.21	40.35	74.00	-33.65
7311.00	46.65	Ave	302	1.9	H	2.21	48.86	54.00	-5.14
2327.08	46.58	PK	327	1.2	V	-13.19	33.39	74.00	-40.61
2327.08	38.58	Ave	327	1.2	V	-13.19	25.39	54.00	-28.61
2379.90	42.36	PK	15	1.4	H	-13.14	29.22	74.00	-44.78
2379.90	37.95	Ave	15	1.4	H	-13.14	24.81	54.00	-29.19
2494.07	42.12	PK	100	1.2	V	-13.08	29.04	74.00	-44.96
2494.07	36.17	Ave	100	1.2	V	-13.08	23.09	54.00	-30.91

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
ANT0 11g: High Channel 2462MHz									
223.45	43.86	QP	360	1.7	H	-11.62	32.24	46.00	-13.76
223.45	36.55	QP	121	1.3	V	-11.62	24.93	46.00	-21.07
4924.00	52.60	PK	140	1.3	V	-0.24	52.36	74.00	-21.64
4924.00	46.30	Ave	140	1.3	V	-0.24	46.06	54.00	-7.94
7386.00	37.51	PK	10	1.7	H	2.84	40.35	74.00	-33.65
7386.00	47.98	Ave	10	1.7	H	2.84	50.82	54.00	-3.18
2333.89	46.04	PK	92	1.4	V	-13.19	32.85	74.00	-41.15
2333.89	37.11	Ave	92	1.4	V	-13.19	23.92	54.00	-30.08
2363.24	44.40	PK	2	1.5	H	-13.14	31.26	74.00	-42.74
2363.24	37.87	Ave	2	1.5	H	-13.14	24.73	54.00	-29.27
2499.64	43.11	PK	154	1.4	V	-13.08	30.03	74.00	-43.97
2499.64	37.52	Ave	154	1.4	V	-13.08	24.44	54.00	-29.56

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
ANT1 11g: Low Channel 2412MHz									
223.45	40.94	QP	227	2.0	H	-11.62	29.32	46.00	-16.68
223.45	38.73	QP	357	1.8	V	-11.62	27.11	46.00	-18.89
4824.00	53.49	PK	262	1.1	V	-1.06	52.43	74.00	-21.57
4824.00	45.07	Ave	262	1.1	V	-1.06	44.01	54.00	-9.99
7236.00	42.07	PK	241	2.0	H	1.33	43.40	74.00	-30.60
7236.00	43.92	Ave	241	2.0	H	1.33	45.25	54.00	-8.75
2324.26	46.29	PK	66	1.6	V	-13.19	33.10	74.00	-40.90
2324.26	39.71	Ave	66	1.6	V	-13.19	26.52	54.00	-27.48
2369.99	44.81	PK	152	1.6	H	-13.14	31.67	74.00	-42.33
2369.99	38.04	Ave	152	1.6	H	-13.14	24.90	54.00	-29.10
2488.75	44.53	PK	174	1.2	V	-13.08	31.45	74.00	-42.55
2488.75	38.50	Ave	174	1.2	V	-13.08	25.42	54.00	-28.58

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
ANT1 11g: Middle Channel 2437MHz									
223.45	41.70	QP	337	1.0	H	-11.62	30.08	46.00	-15.92
223.45	37.24	QP	166	1.6	V	-11.62	25.62	46.00	-20.38
4874.00	52.92	PK	35	1.6	V	-0.62	52.30	74.00	-21.70
4874.00	43.59	Ave	35	1.6	V	-0.62	42.97	54.00	-11.03
7311.00	42.14	PK	75	1.8	H	2.21	44.35	74.00	-29.65
7311.00	43.01	Ave	75	1.8	H	2.21	45.22	54.00	-8.78
2319.45	45.68	PK	99	1.4	V	-13.19	32.49	74.00	-41.51
2319.45	38.77	Ave	99	1.4	V	-13.19	25.58	54.00	-28.42
2383.48	44.73	PK	307	1.6	H	-13.14	31.59	74.00	-42.41
2383.48	37.99	Ave	307	1.6	H	-13.14	24.85	54.00	-29.15
2486.56	42.45	PK	66	1.5	V	-13.08	29.37	74.00	-44.63
2486.56	38.59	Ave	66	1.5	V	-13.08	25.51	54.00	-28.49

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
ANT1 11g: High Channel 2462MHz									
223.45	40.44	QP	160	1.8	H	-11.62	28.82	46.00	-17.18
223.45	37.10	QP	53	2.0	V	-11.62	25.48	46.00	-20.52
4924.00	53.05	PK	143	1.3	V	-0.24	52.81	74.00	-21.19
4924.00	43.25	Ave	143	1.3	V	-0.24	43.01	54.00	-10.99
7386.00	40.84	PK	174	1.9	H	2.84	43.68	74.00	-30.32
7386.00	43.76	Ave	174	1.9	H	2.84	46.60	54.00	-7.40
2330.19	45.24	PK	214	1.9	V	-13.19	32.05	74.00	-41.95
2330.19	39.21	Ave	214	1.9	V	-13.19	26.02	54.00	-27.98
2385.86	44.74	PK	53	2.0	H	-13.14	31.60	74.00	-42.40
2385.86	38.35	Ave	53	2.0	H	-13.14	25.21	54.00	-28.79
2493.00	42.48	PK	349	1.0	V	-13.08	29.40	74.00	-44.60
2493.00	37.73	Ave	349	1.0	V	-13.08	24.65	54.00	-29.35

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
ANT0+ANT1 n20: Low Channel 2412MHz									
223.45	44.27	QP	143	1.1	H	-11.62	32.65	46.00	-13.35
223.45	37.86	QP	276	1.9	V	-11.62	26.24	46.00	-19.76
4824.00	51.77	PK	268	1.5	V	-1.06	50.71	74.00	-23.29
4824.00	45.64	Ave	268	1.5	V	-1.06	44.58	54.00	-9.42
7236.00	37.51	PK	305	1.5	H	1.33	38.84	74.00	-35.16
7236.00	47.28	Ave	305	1.5	H	1.33	48.61	54.00	-5.39
2333.12	46.42	PK	290	1.5	V	-13.19	33.23	74.00	-40.77
2333.12	38.06	Ave	290	1.5	V	-13.19	24.87	54.00	-29.13
2378.02	42.49	PK	236	1.5	H	-13.14	29.35	74.00	-44.65
2378.02	36.06	Ave	236	1.5	H	-13.14	22.92	54.00	-31.08
2488.35	43.90	PK	69	1.0	V	-13.08	30.82	74.00	-43.18
2488.35	36.89	Ave	69	1.0	V	-13.08	23.81	54.00	-30.19

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
ANT0+ANT1 n20: Middle Channel 2437MHz									
223.45	43.77	QP	218	1.4	H	-11.62	32.15	46.00	-13.85
223.45	36.57	QP	177	1.3	V	-11.62	24.95	46.00	-21.05
4874.00	51.60	PK	292	1.7	V	-0.62	50.98	74.00	-23.02
4874.00	46.18	Ave	292	1.7	V	-0.62	45.56	54.00	-8.44
7311.00	36.25	PK	144	1.7	H	2.21	38.46	74.00	-35.54
7311.00	48.61	Ave	144	1.7	H	2.21	50.82	54.00	-3.18
2316.93	45.94	PK	72	2.0	V	-13.19	32.75	74.00	-41.25
2316.93	37.96	Ave	72	2.0	V	-13.19	24.77	54.00	-29.23
2386.46	44.13	PK	91	1.7	H	-13.14	30.99	74.00	-43.01
2386.46	38.47	Ave	91	1.7	H	-13.14	25.33	54.00	-28.67
2491.06	43.83	PK	94	1.8	V	-13.08	30.75	74.00	-43.25
2491.06	37.14	Ave	94	1.8	V	-13.08	24.06	54.00	-29.94

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
ANT0+ANT1 n20: High Channel 2462MHz									
223.45	44.79	QP	294	1.6	H	-11.62	33.17	46.00	-12.83
223.45	37.93	QP	99	1.9	V	-11.62	26.31	46.00	-19.69
4924.00	50.42	PK	176	1.3	V	-0.24	50.18	74.00	-23.82
4924.00	46.65	Ave	176	1.3	V	-0.24	46.41	54.00	-7.59
7386.00	35.25	PK	148	1.0	H	2.84	38.09	74.00	-35.91
7386.00	47.99	Ave	148	1.0	H	2.84	50.83	54.00	-3.17
2328.93	46.81	PK	77	2.0	V	-13.19	33.62	74.00	-40.38
2328.93	39.82	Ave	77	2.0	V	-13.19	26.63	54.00	-27.37
2364.30	43.10	PK	2	1.6	H	-13.14	29.96	74.00	-44.04
2364.30	38.52	Ave	2	1.6	H	-13.14	25.38	54.00	-28.62
2488.52	43.26	PK	130	1.3	V	-13.08	30.18	74.00	-43.82
2488.52	37.93	Ave	130	1.3	V	-13.08	24.85	54.00	-29.15

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
ANT0+ANT1 n40: Low Channel 2422MHz									
223.45	44.27	QP	38	1.7	H	-11.62	32.65	46.00	-13.35
223.45	38.48	QP	317	1.5	V	-11.62	26.86	46.00	-19.14
4844.00	47.72	PK	90	1.5	V	-1.06	46.66	74.00	-27.34
4844.00	44.93	Ave	90	1.5	V	-1.06	43.87	54.00	-10.13
7266.00	33.84	PK	27	1.4	H	1.33	35.17	74.00	-38.83
7266.00	46.91	Ave	27	1.4	H	1.33	48.24	54.00	-5.76
2327.64	45.75	PK	12	1.1	V	-13.19	32.56	74.00	-41.44
2327.64	39.92	Ave	12	1.1	V	-13.19	26.73	54.00	-27.27
2350.63	42.43	PK	108	1.7	H	-13.14	29.29	74.00	-44.71
2350.63	38.44	Ave	108	1.7	H	-13.14	25.30	54.00	-28.70
2497.94	44.27	PK	323	1.1	V	-13.08	31.19	74.00	-42.81
2497.94	38.63	Ave	323	1.1	V	-13.08	25.55	54.00	-28.45

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
ANT0+ANT1 n40: Middle Channel 2437MHz									
223.45	44.81	QP	277	1.8	H	-11.62	33.19	46.00	-12.81
223.45	39.41	QP	247	1.1	V	-11.62	27.79	46.00	-18.21
4874.00	46.81	PK	200	1.2	V	-0.62	46.19	74.00	-27.81
4874.00	45.51	Ave	200	1.2	V	-0.62	44.89	54.00	-9.11
7311.00	33.57	PK	294	2.0	H	2.21	35.78	74.00	-38.22
7311.00	47.09	Ave	294	2.0	H	2.21	49.30	54.00	-4.70
2315.09	46.85	PK	22	1.4	V	-13.19	33.66	74.00	-40.34
2315.09	37.10	Ave	22	1.4	V	-13.19	23.91	54.00	-30.09
2381.64	42.51	PK	218	1.8	H	-13.14	29.37	74.00	-44.63
2381.64	36.32	Ave	218	1.8	H	-13.14	23.18	54.00	-30.82
2497.34	44.09	PK	256	1.9	V	-13.08	31.01	74.00	-42.99
2497.34	38.32	Ave	256	1.9	V	-13.08	25.24	54.00	-28.76

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
ANT0+ANT1 n40: High Channel 2452MHz									
223.45	45.76	QP	215	1.2	H	-11.62	34.14	46.00	-11.86
223.45	39.82	QP	166	1.5	V	-11.62	28.20	46.00	-17.80
4904.00	47.15	PK	161	1.2	V	-0.24	46.91	74.00	-27.09
4904.00	45.74	Ave	161	1.2	V	-0.24	45.50	54.00	-8.50
7356.00	33.68	PK	93	1.8	H	2.84	36.52	74.00	-37.48
7356.00	46.71	Ave	93	1.8	H	2.84	49.55	54.00	-4.45
2349.76	46.58	PK	102	1.5	V	-13.19	33.39	74.00	-40.61
2349.76	37.18	Ave	102	1.5	V	-13.19	23.99	54.00	-30.01
2362.00	43.80	PK	300	1.8	H	-13.14	30.66	74.00	-43.34
2362.00	36.35	Ave	300	1.8	H	-13.14	23.21	54.00	-30.79
2499.45	44.27	PK	119	1.4	V	-13.08	31.19	74.00	-42.81
2499.45	38.38	Ave	119	1.4	V	-13.08	25.30	54.00	-28.70

**Test Frequency: 18GHz~25GHz**

The measurements were more than 20 dB below the limit and not reported.

## 8 Band Edge Measurement



Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	KDB558074 D01 DTS Meas Guidance v03r04
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

### 8.1 Test Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

## 8.2 Test Result


Test result plots shown as follows:

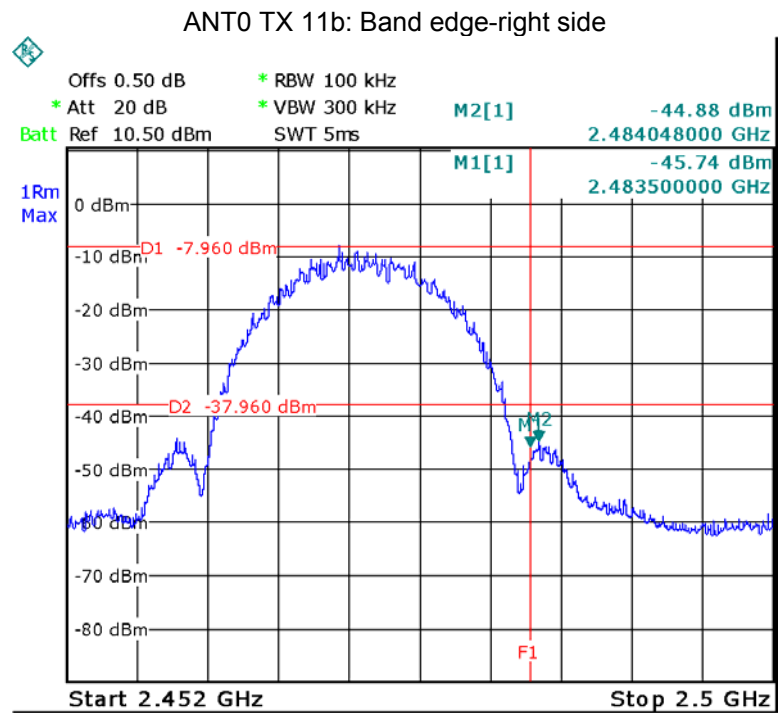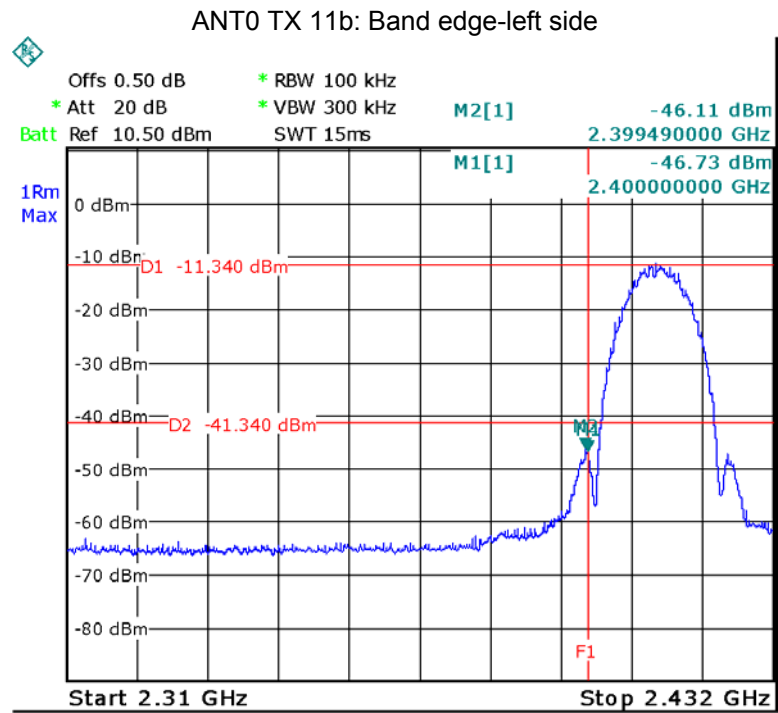


ANT0 TX 11g: Band edge-left side

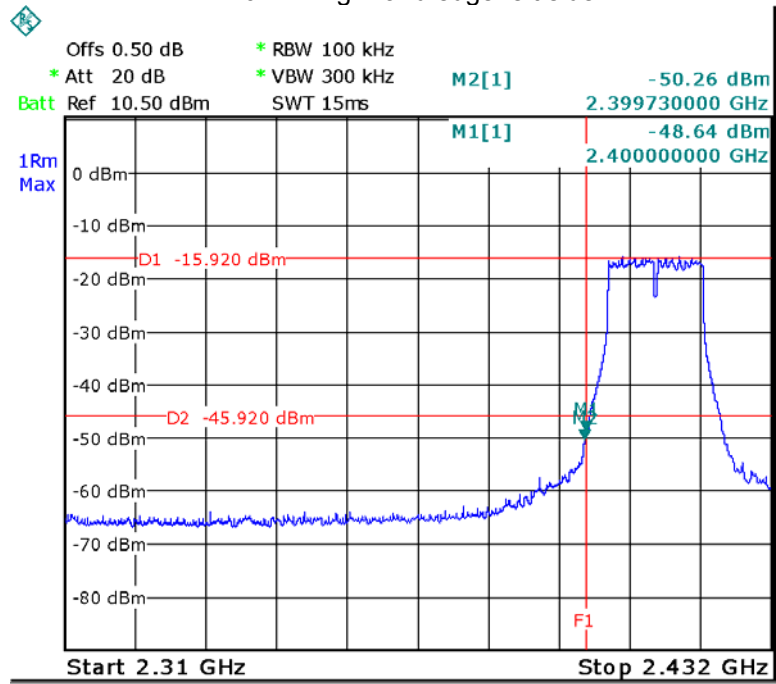


ANT0 TX 11g: Band edge-right side

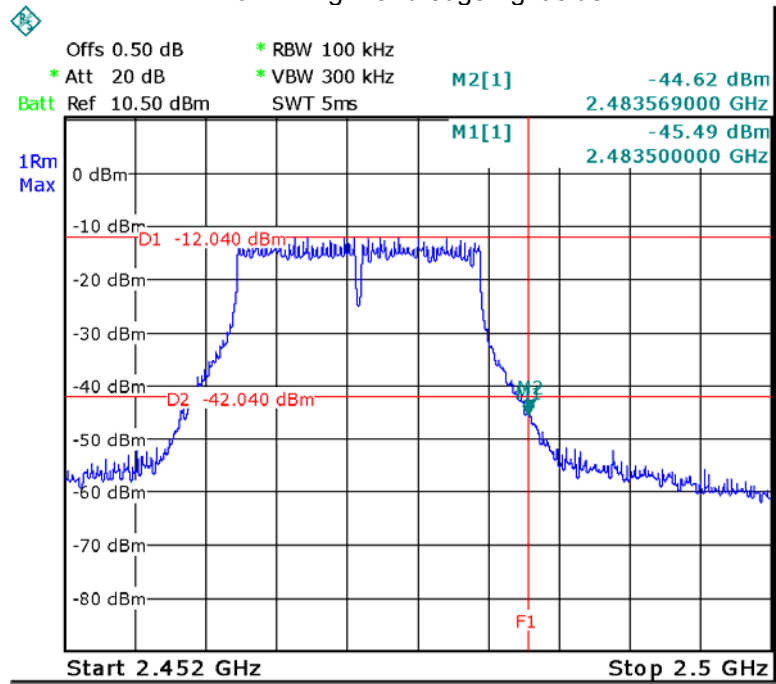


ANT0 TX 11n HT20: Band edge-left side

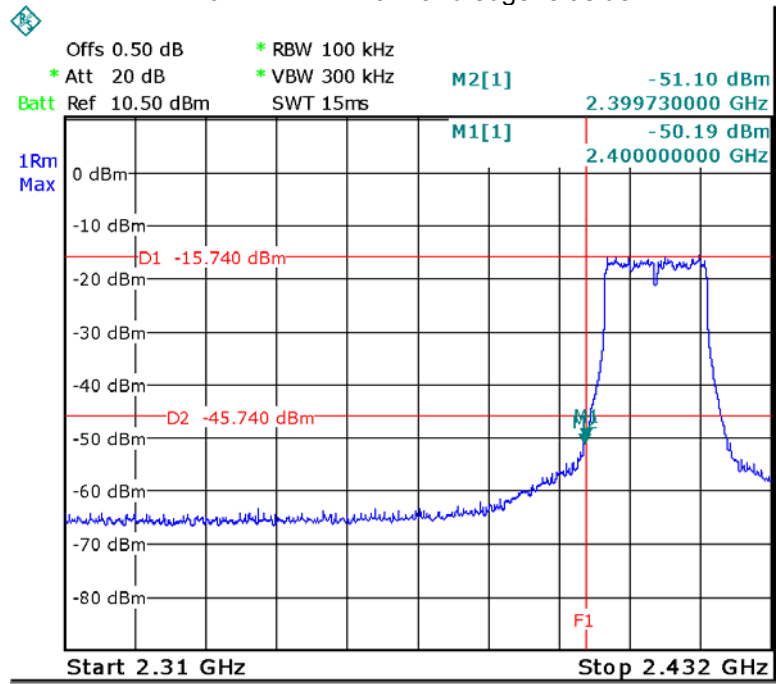


ANT0 TX 11n HT20: Band edge-right side

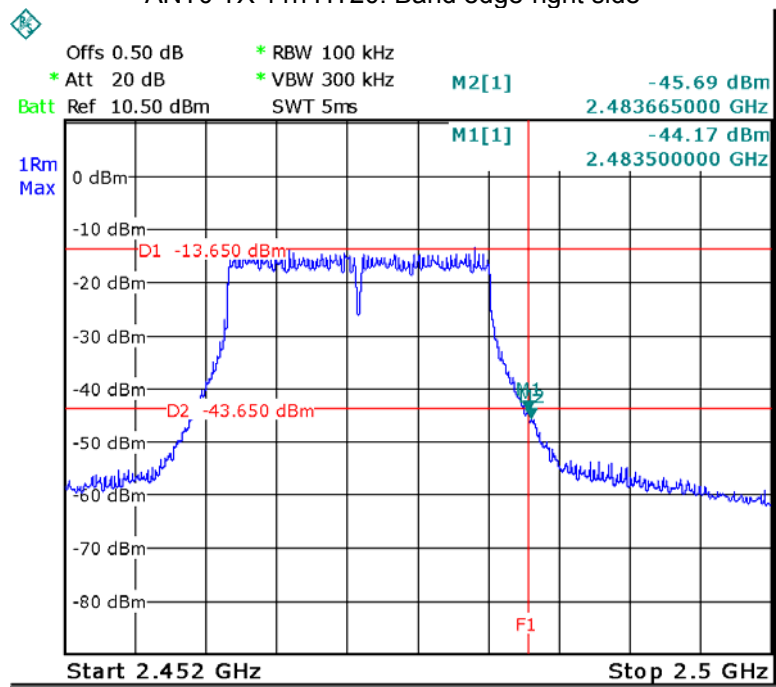


ANT0 TX 11n HT40: Band edge-left side

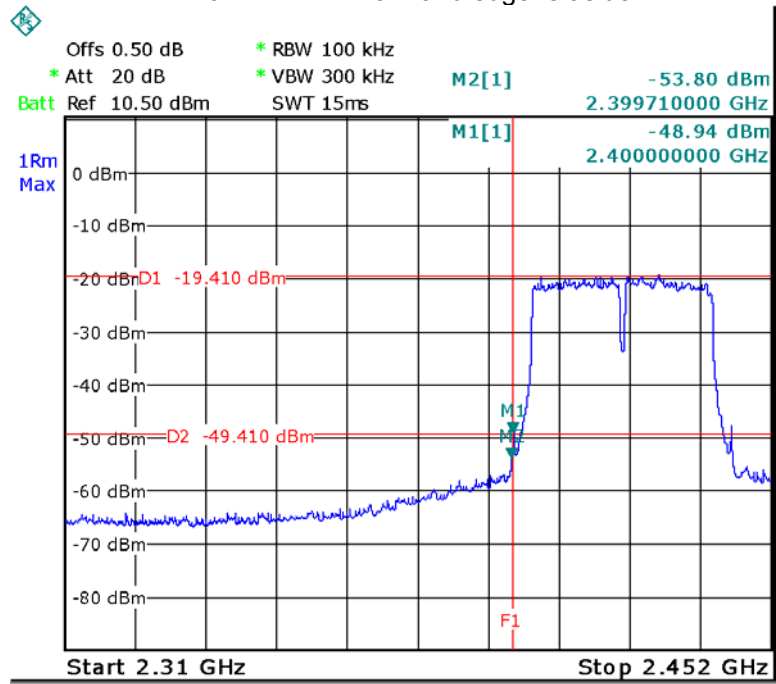


ANT0 TX 11n HT40: Band edge-right side

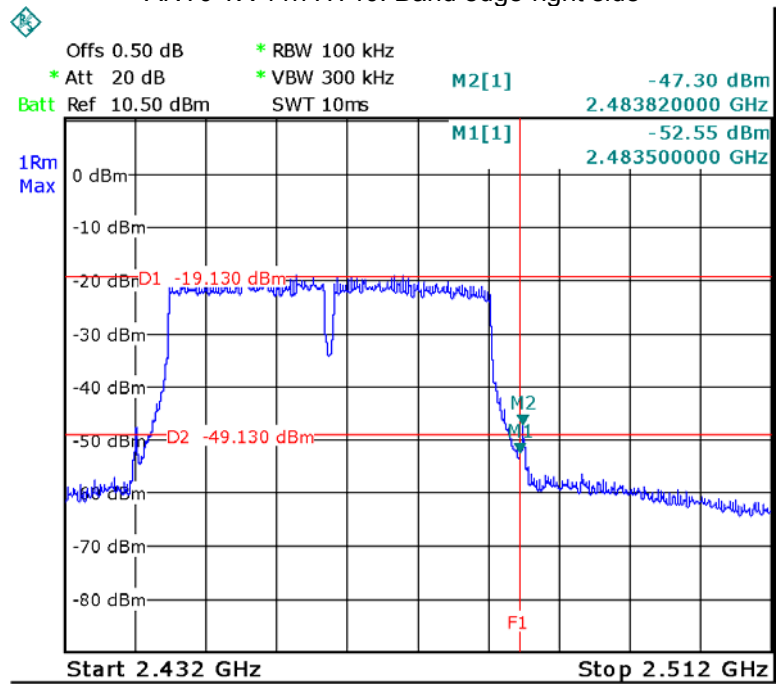


ANT1 TX 11b: Band edge-left side

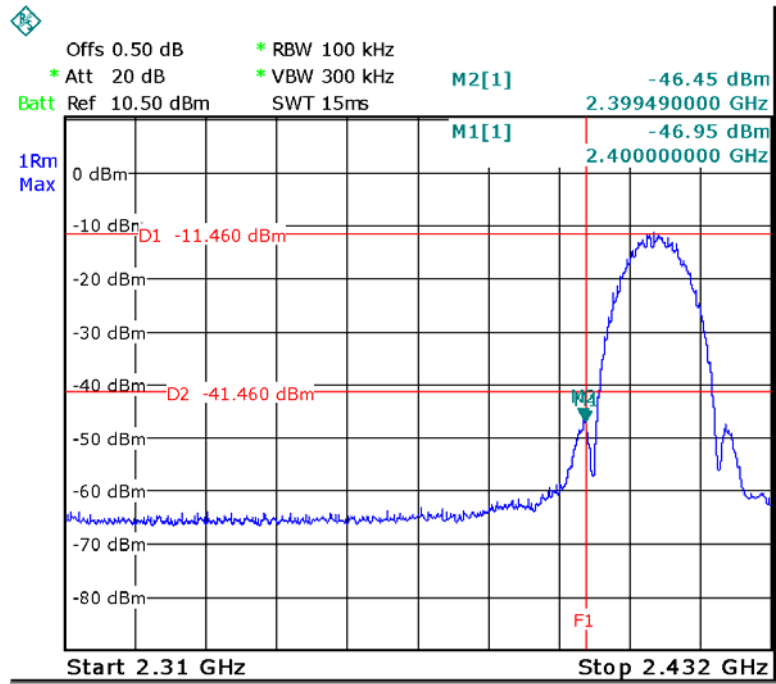


ANT1 TX 11b: Band edge-right side

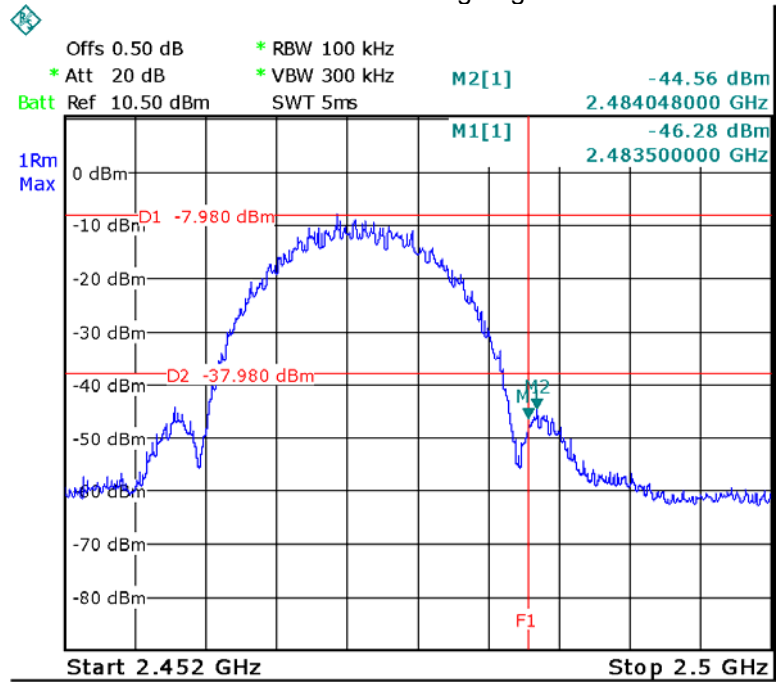


ANT1 TX 11g: Band edge-left side

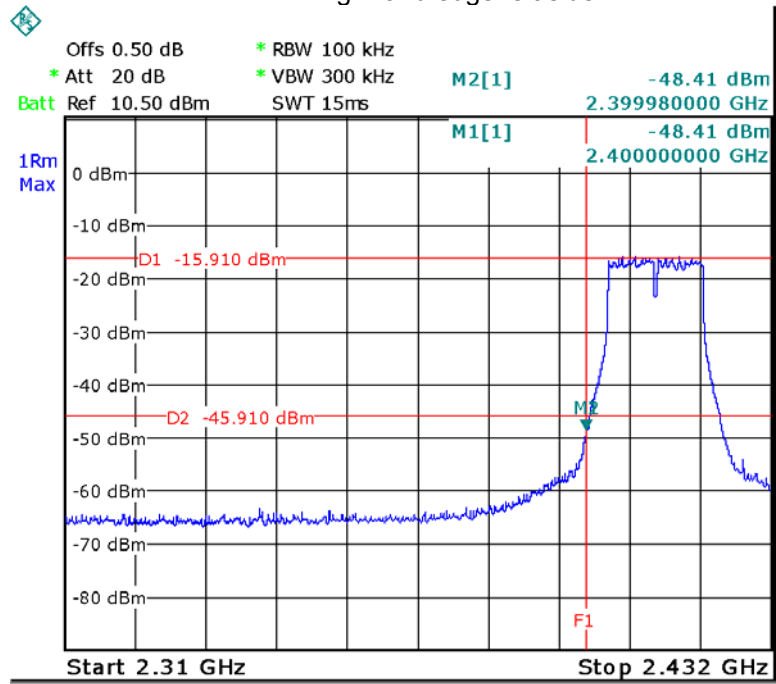


ANT1 TX 11g: Band edge-right side

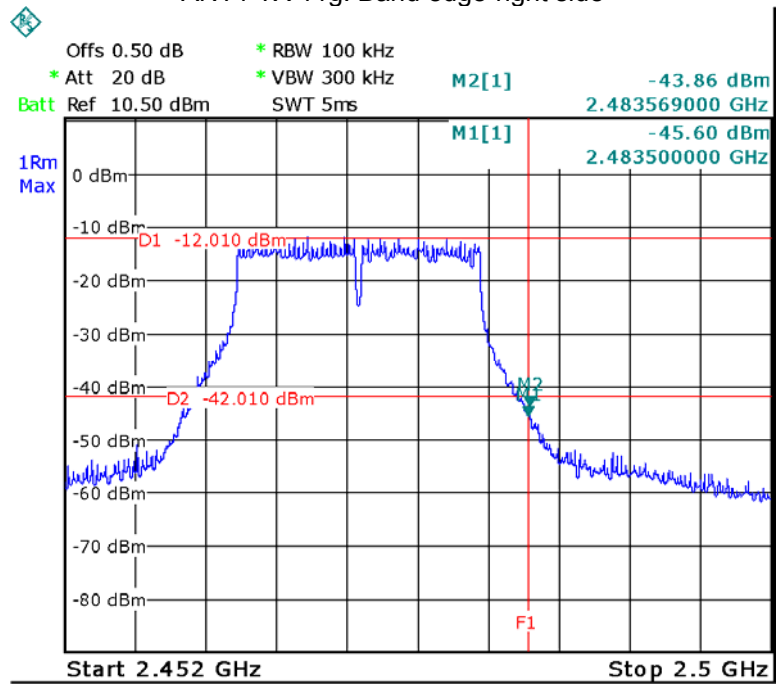


ANT1 TX 11n HT20: Band edge-left side

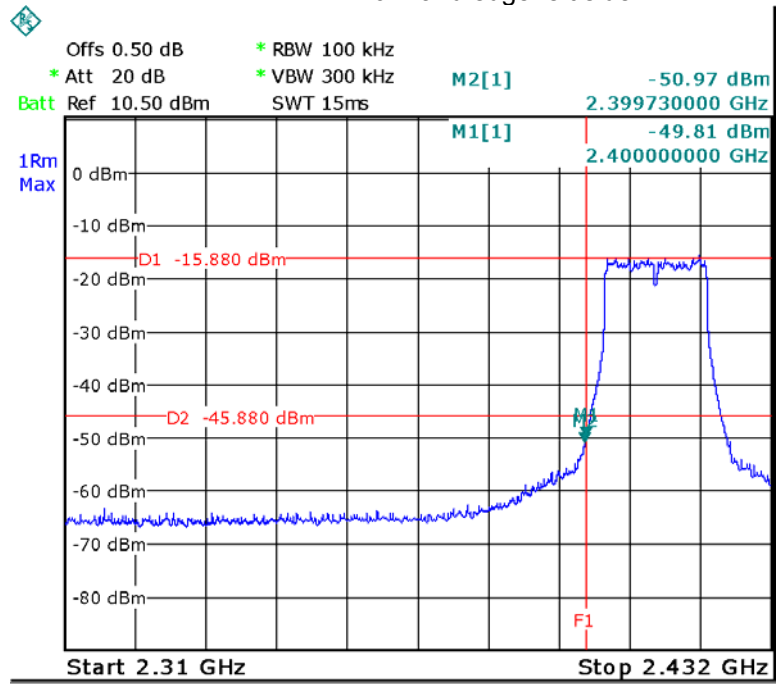


ANT1 TX 11n HT20: Band edge-right side

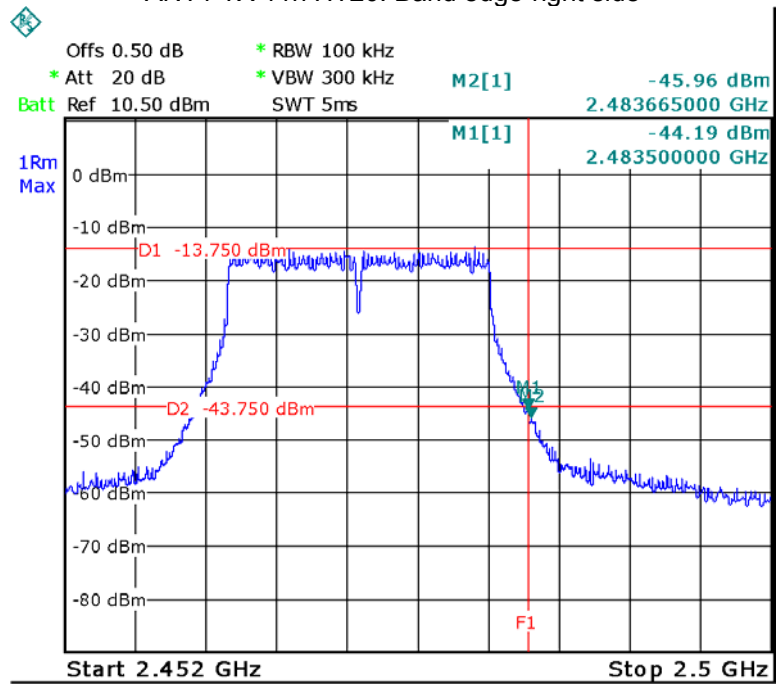

ANT1 TX 11n HT40: Band edge-left side

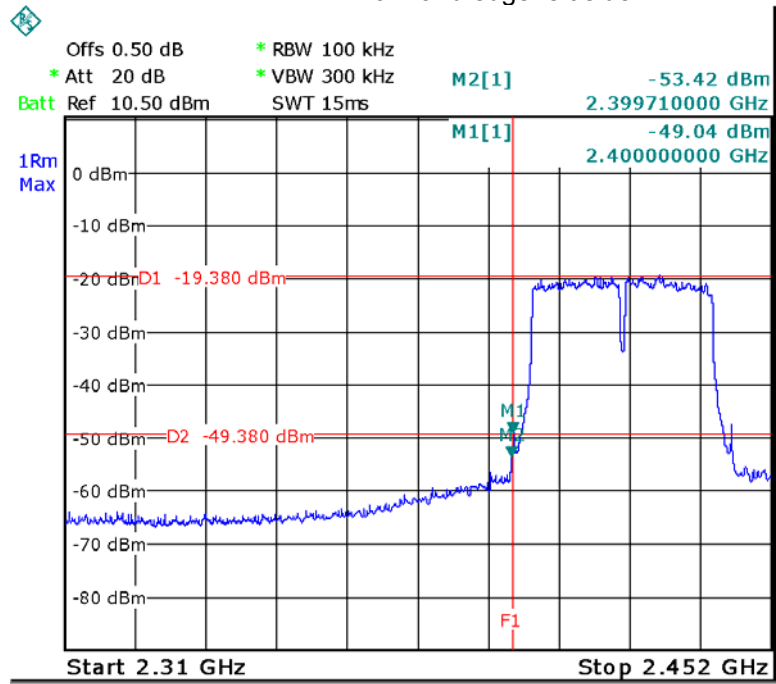

ANT1 TX 11n HT40: Band edge-right side

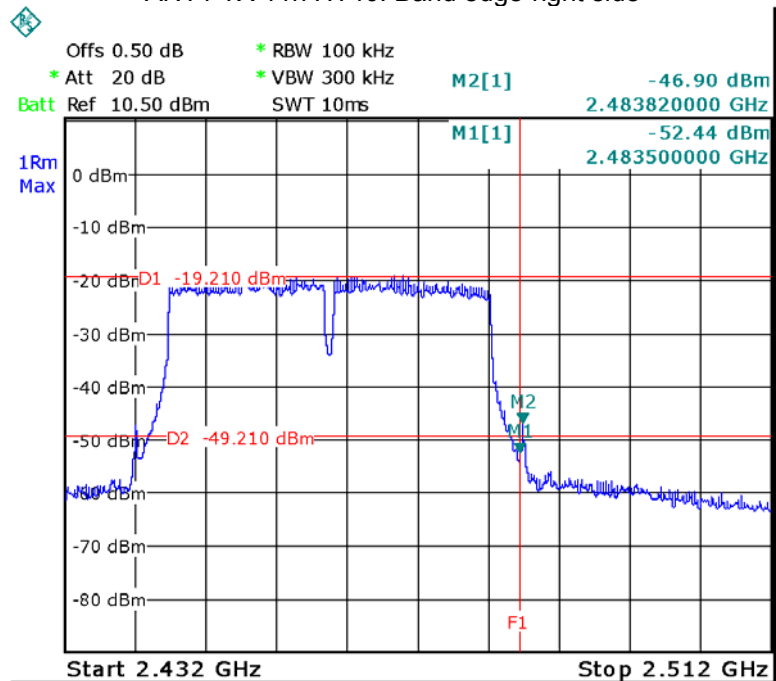

## 9 6 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB558074 D01 DTS Meas Guidance v03r04


### 9.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz


### 9.2 Test Result:

ANT	Operation mode	Bandwidth (MHz)		
		Low	Middle	High
ANT0	11b	9.461	9.461	9.461
	11g	16.567	16.567	16.567
	11n HT20	17.838	17.838	17.838
	11n HT40	36.560	36.560	36.560
ANT1	11b	9.461	9.461	9.461
	11g	16.567	16.567	16.567
	11n HT20	17.838	17.838	17.838
	11n HT40	36.560	36.560	36.560


### ANT0 TX 11b Low channel

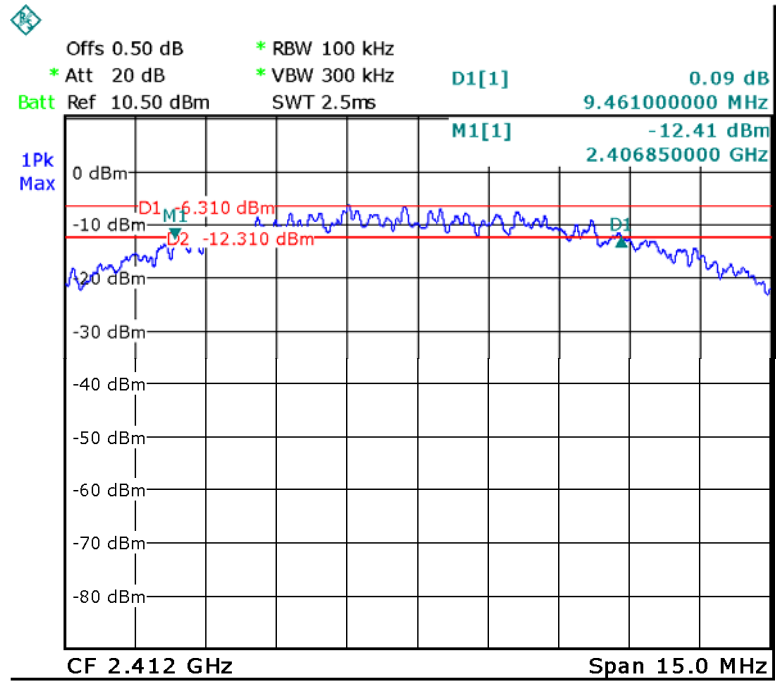


### ANT0 TX 11b Middle channel


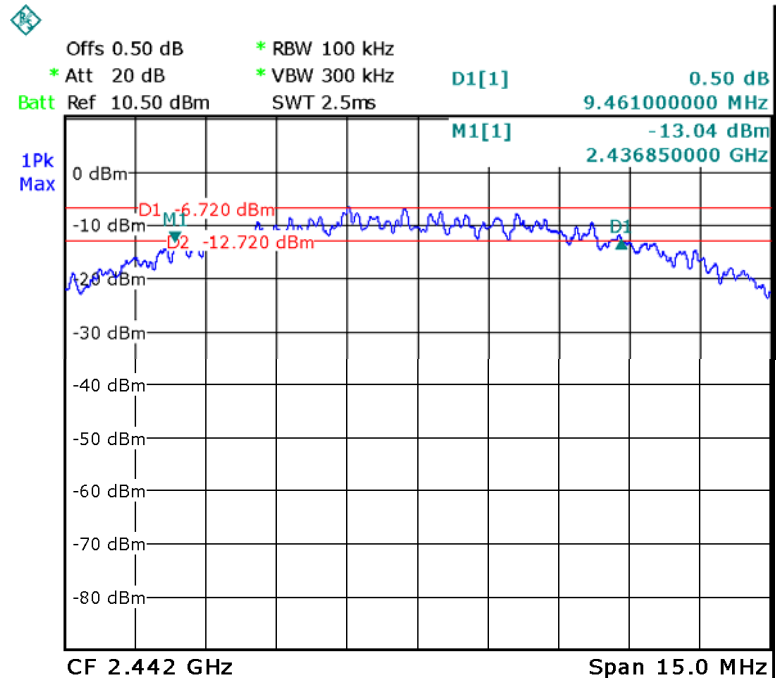




### ANT0 TX 11b High channel


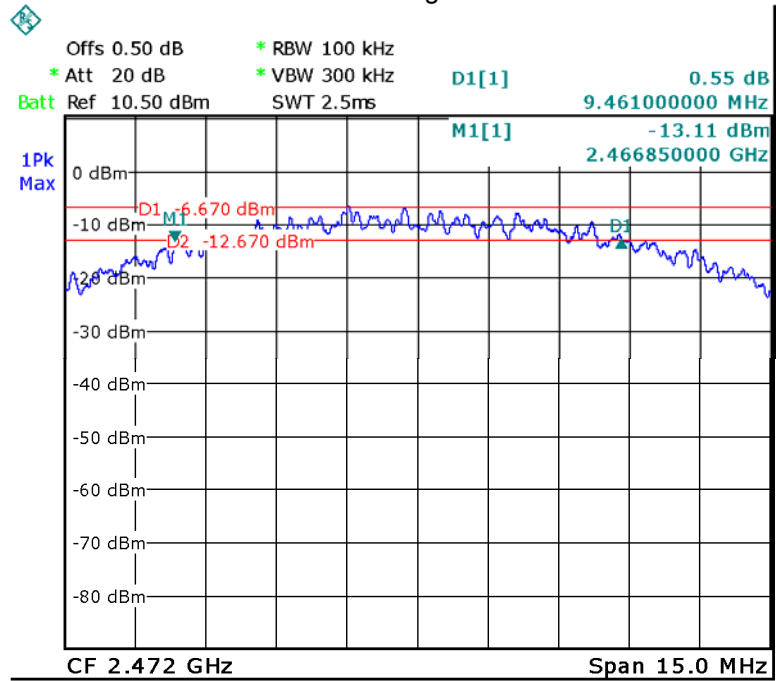


### ANT0 TX 11g Low channel

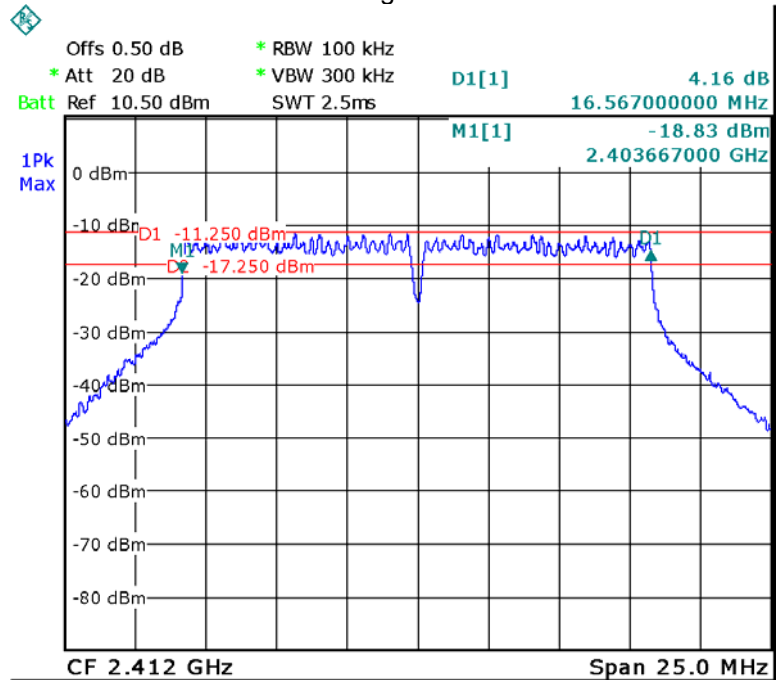


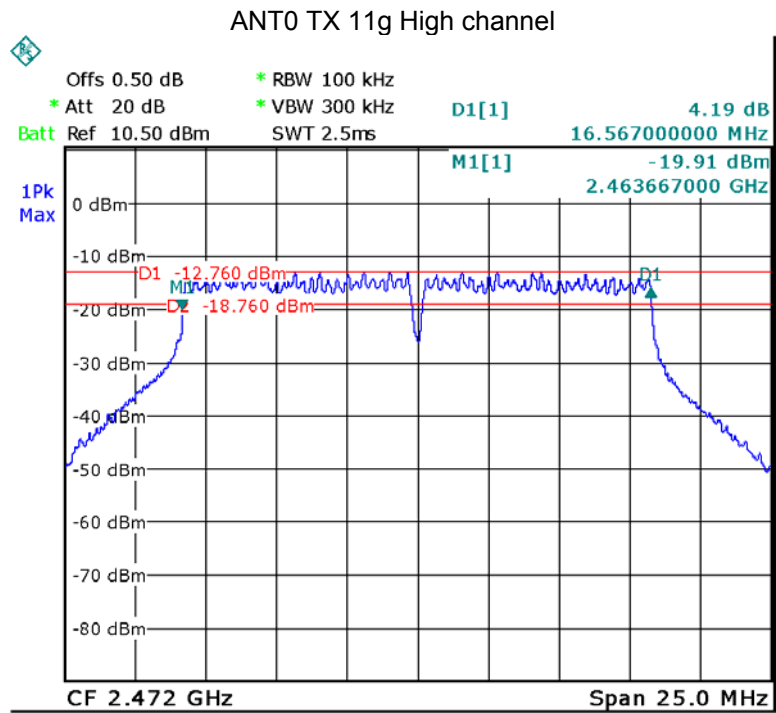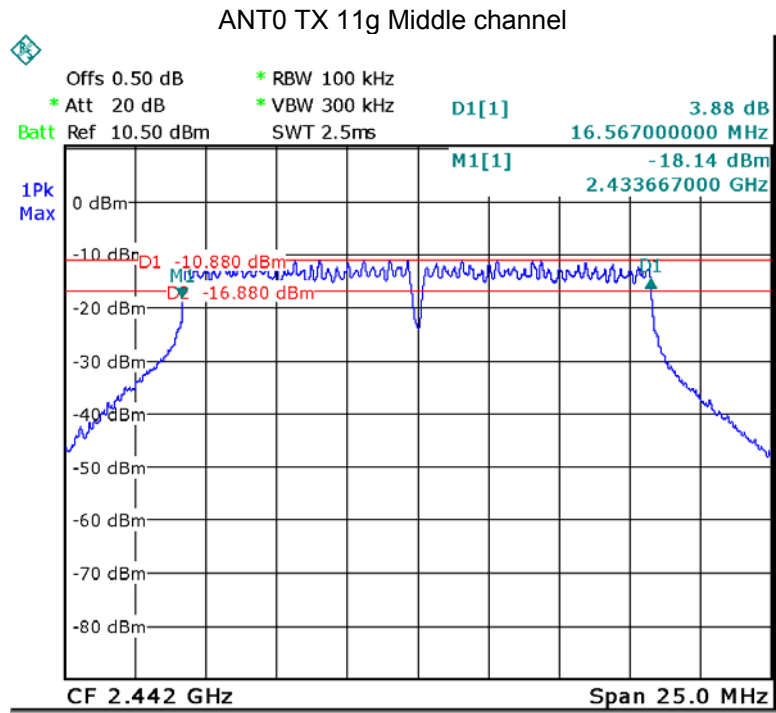

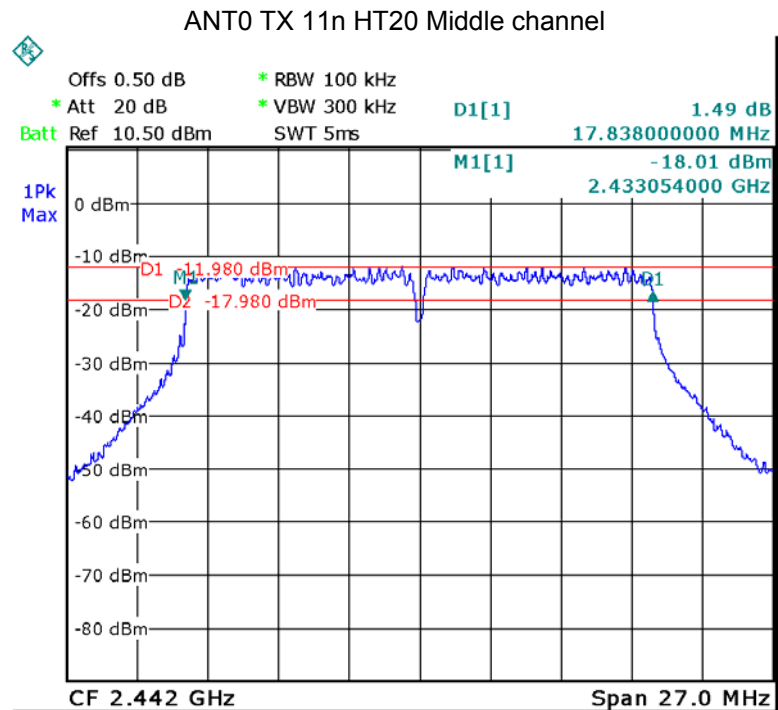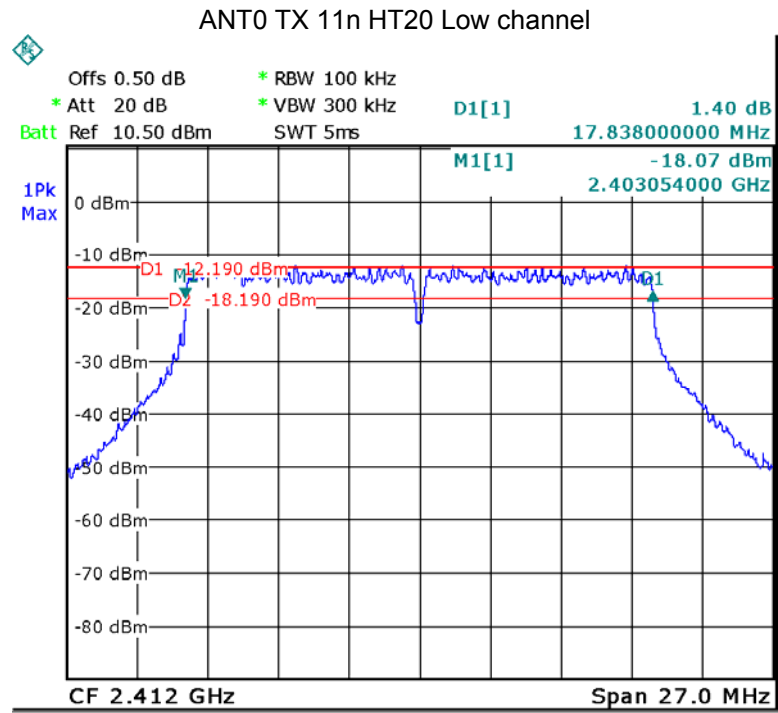


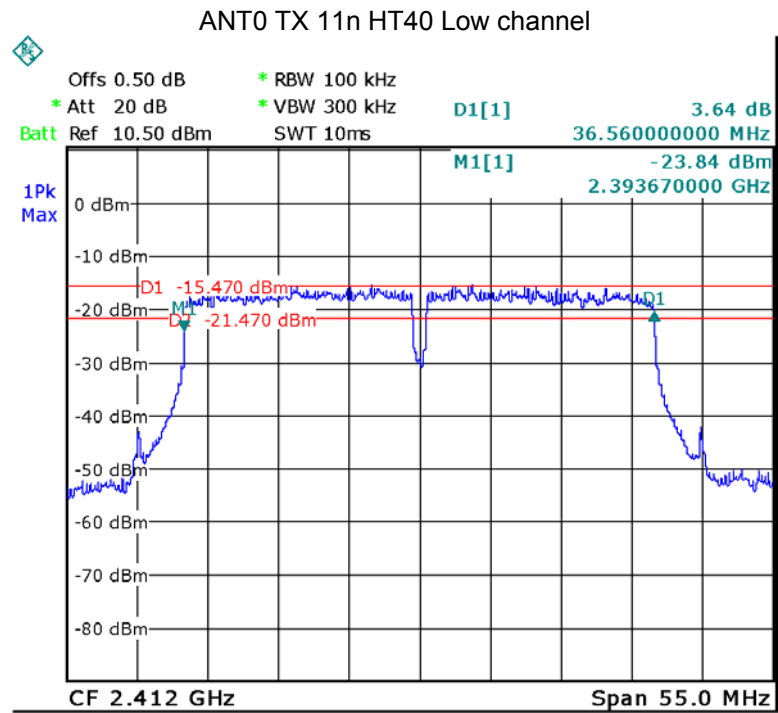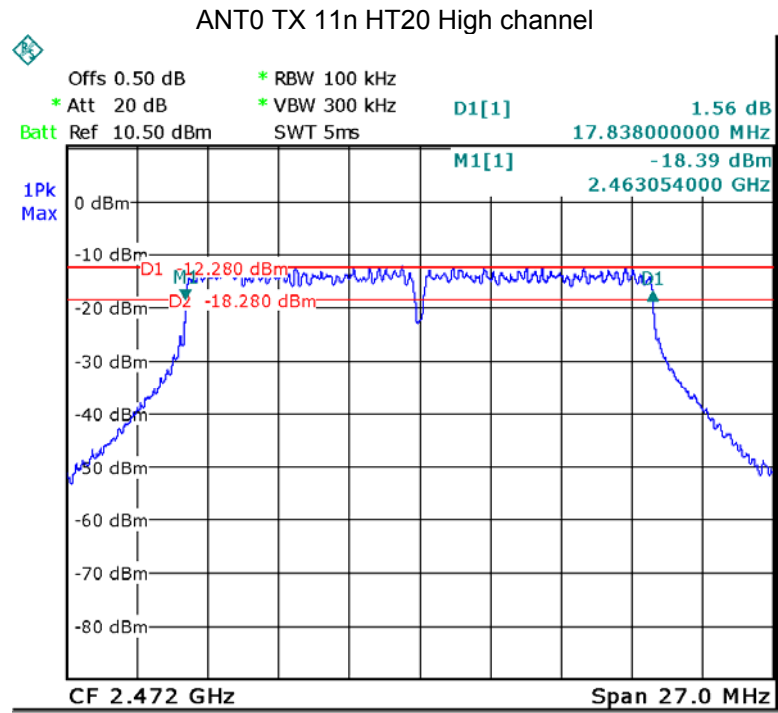


ANT0 TX 11n HT40 Middle channel

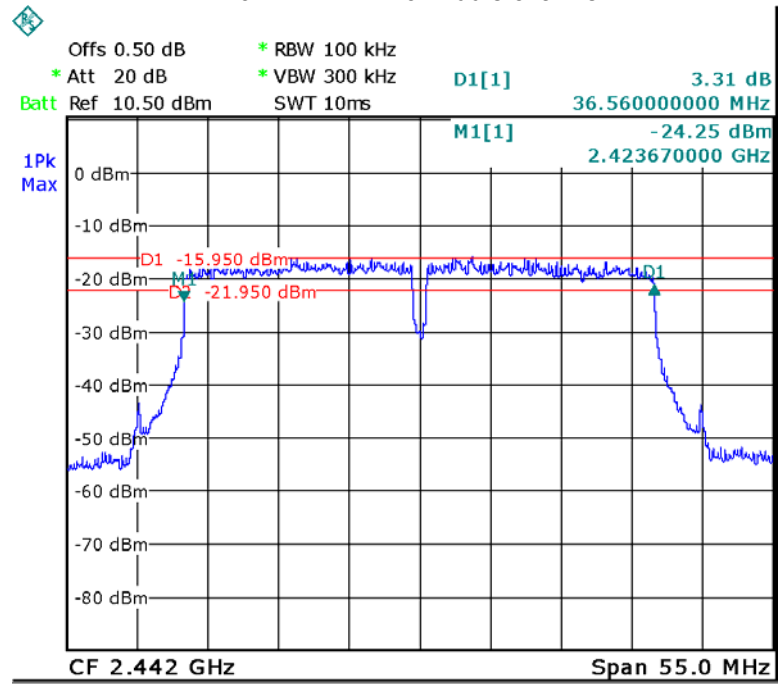


ANT0 TX 11n HT40 High channel

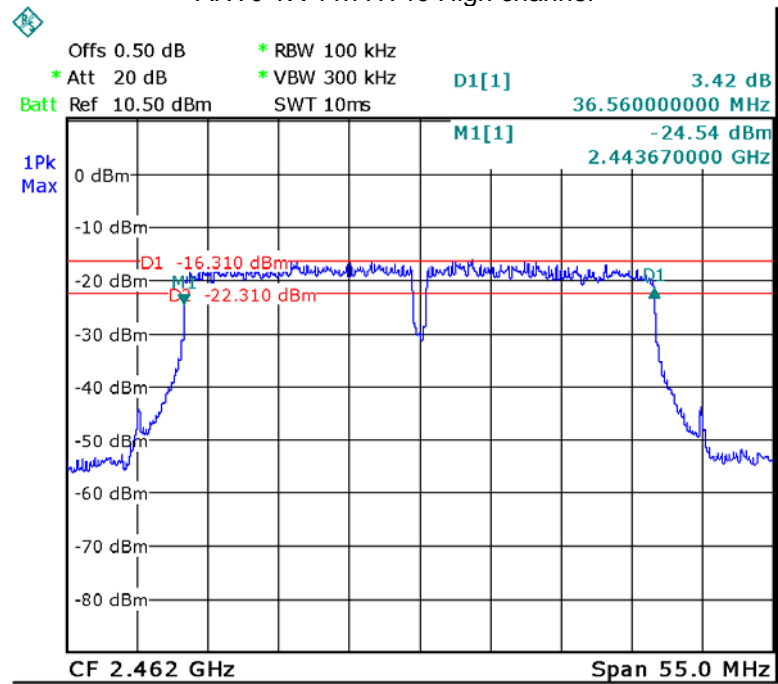


### ANT1 TX 11b Low channel

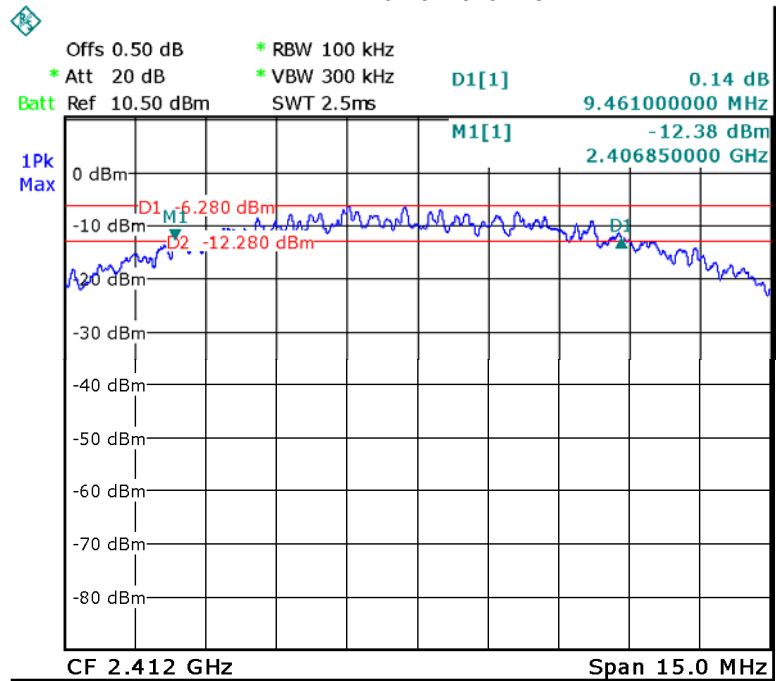


### ANT1 TX 11b Middle channel


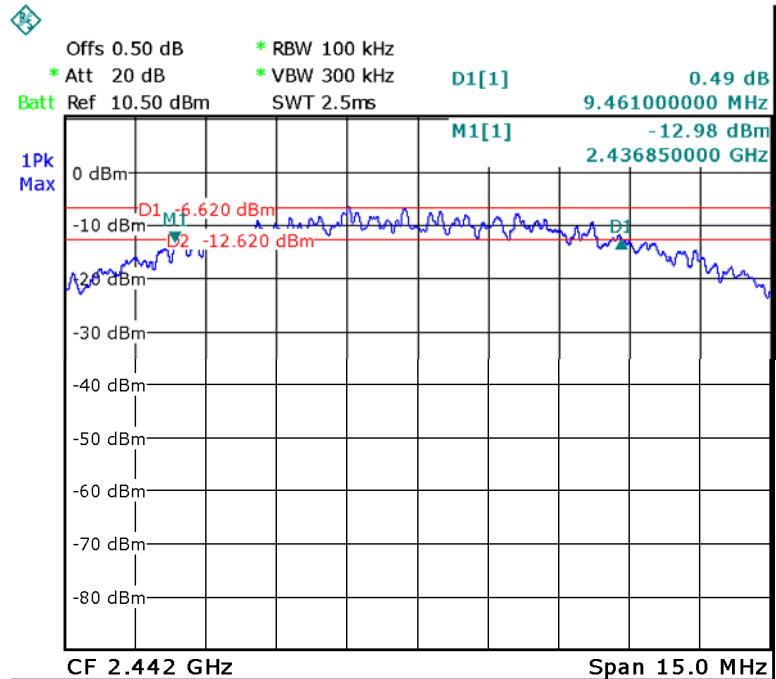




### ANT1 TX 11b High channel


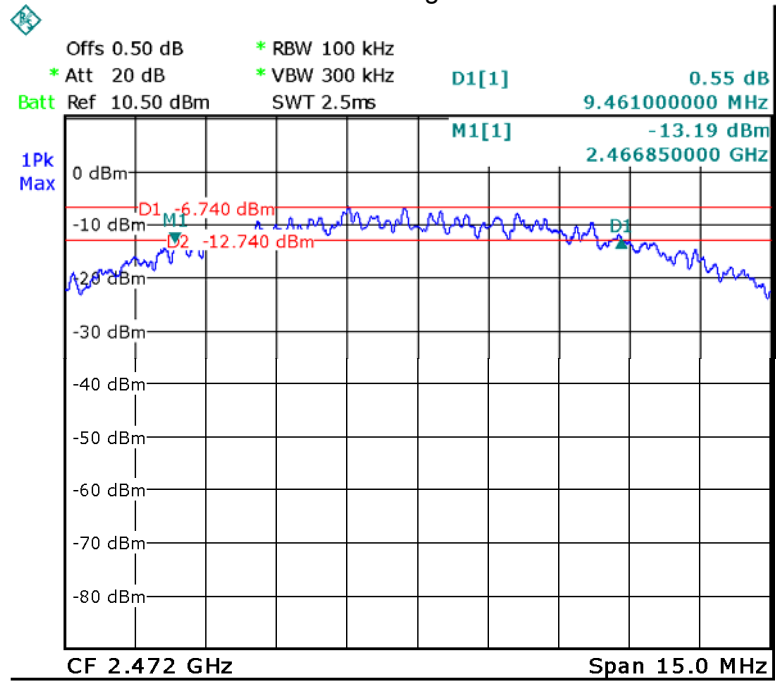


### ANT1 TX 11g Low channel

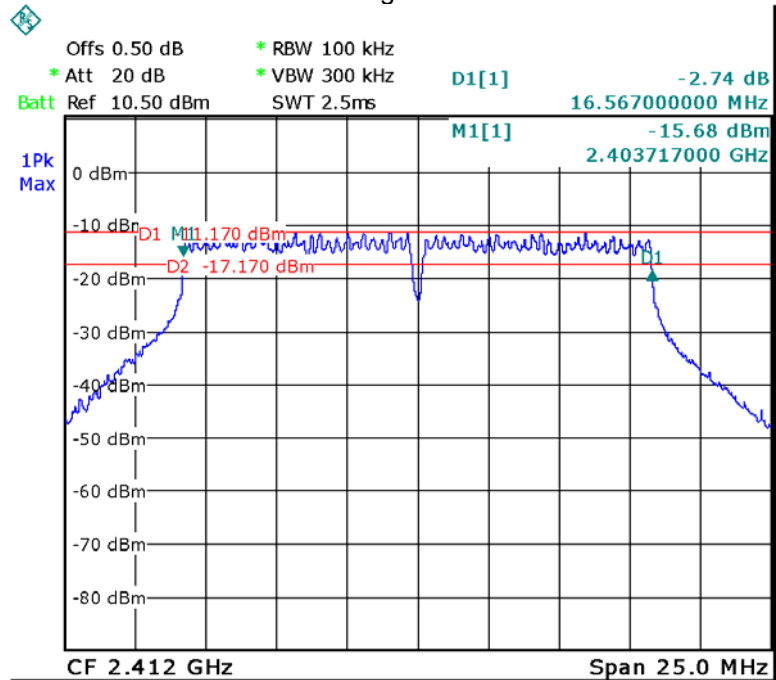


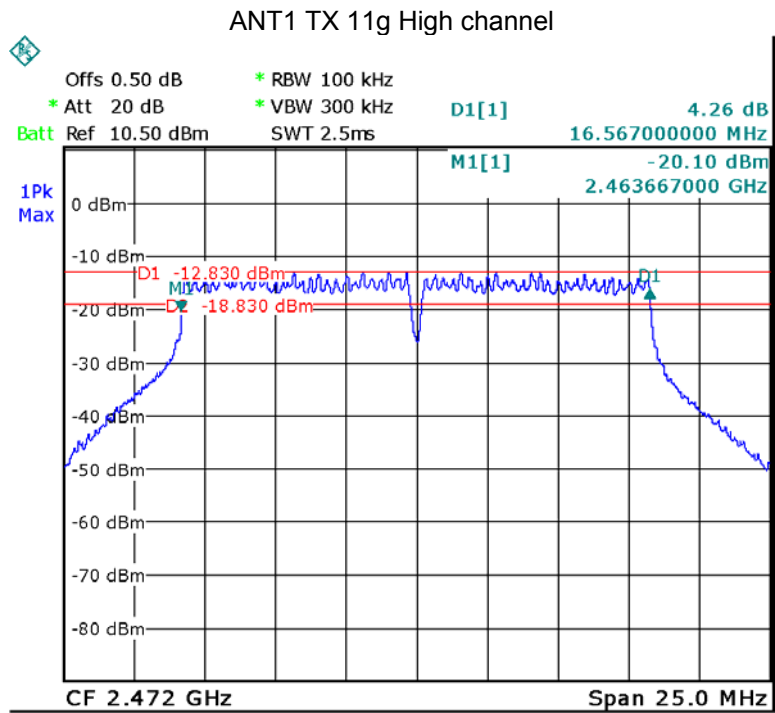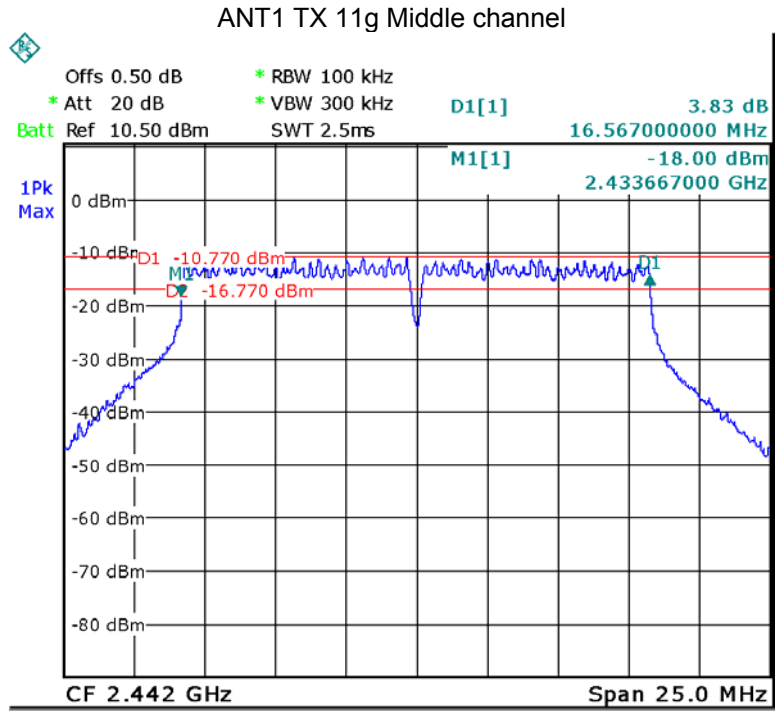

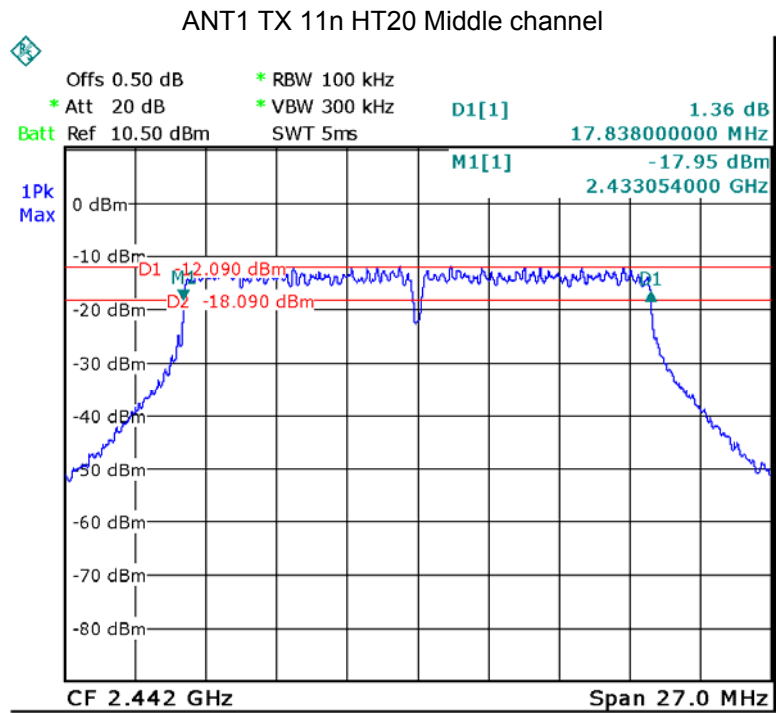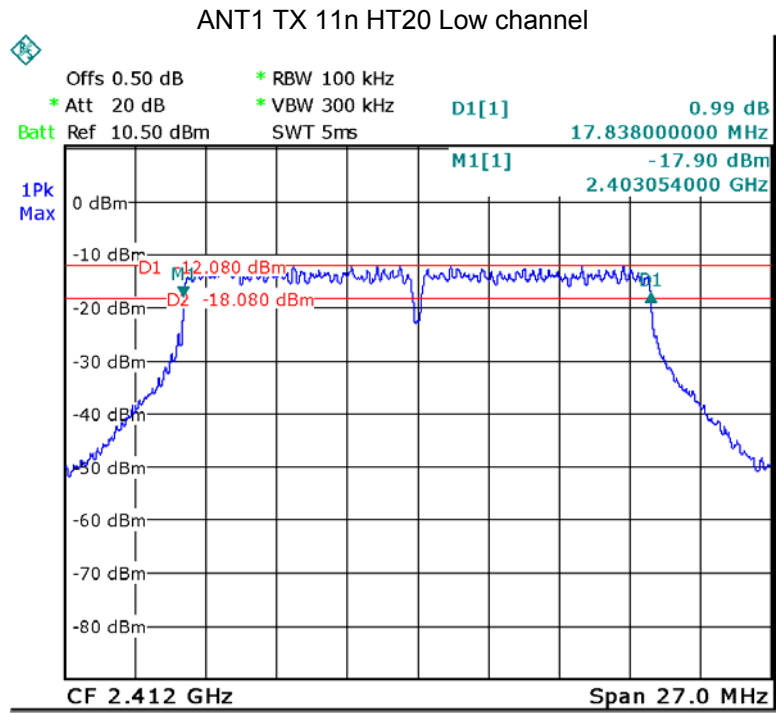


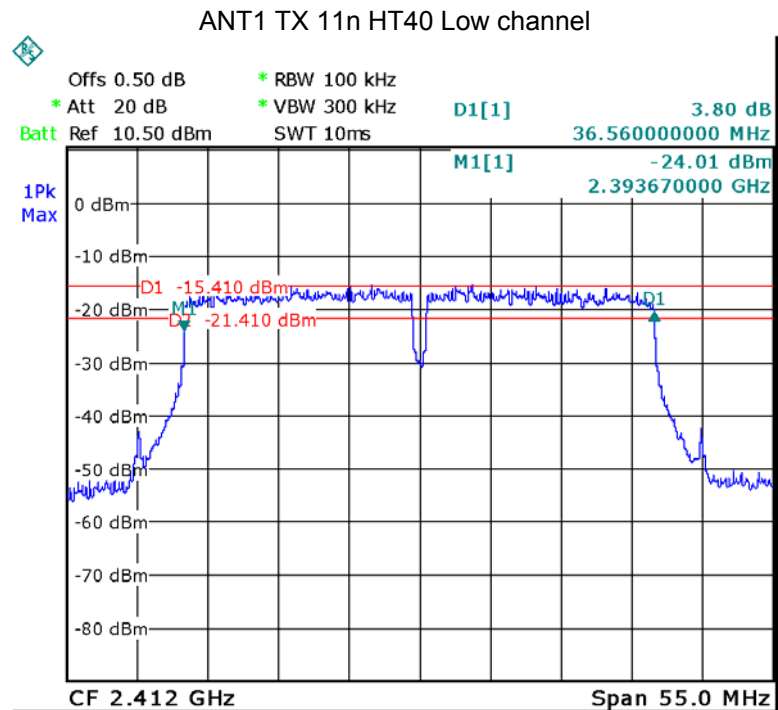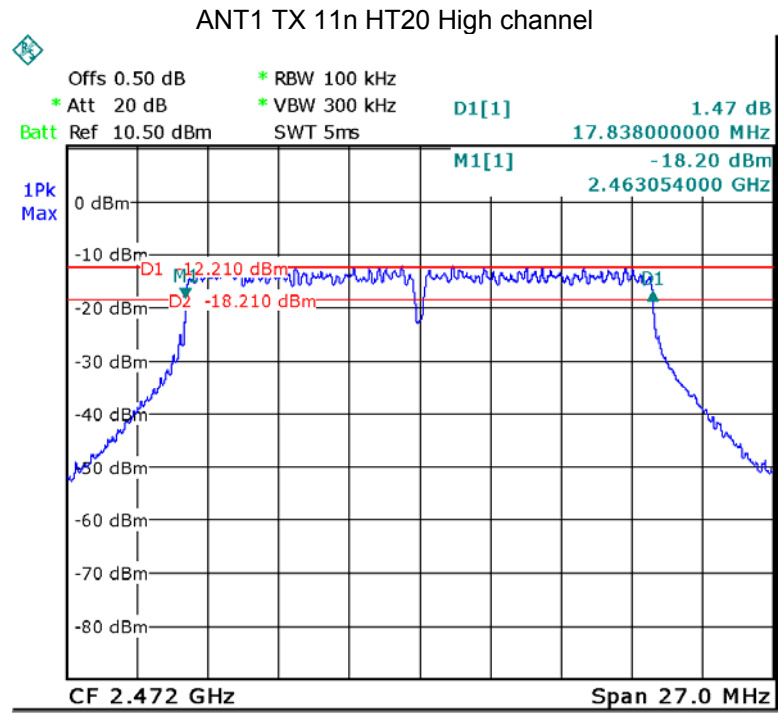

### ANT1 TX 11n HT40 Middle channel

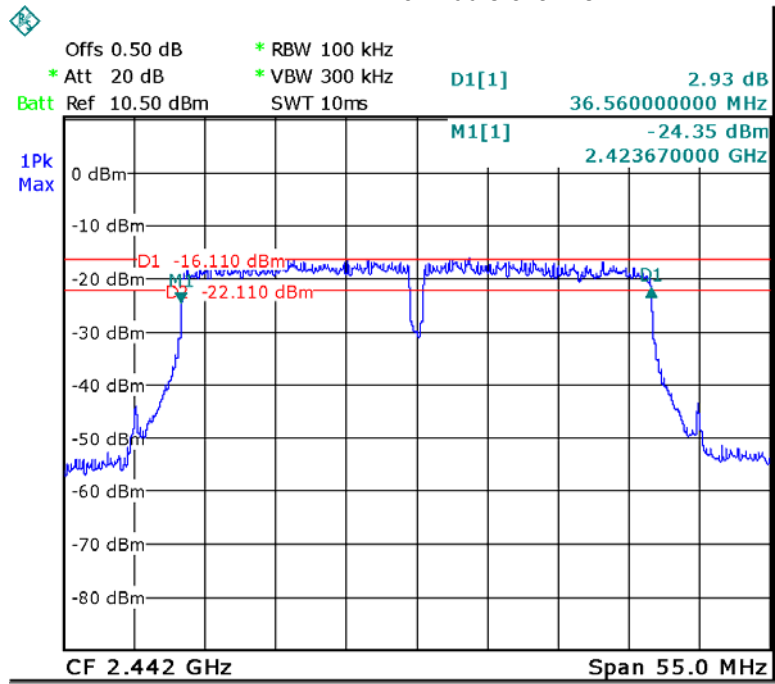

### ANT1 TX 11n HT40 High channel

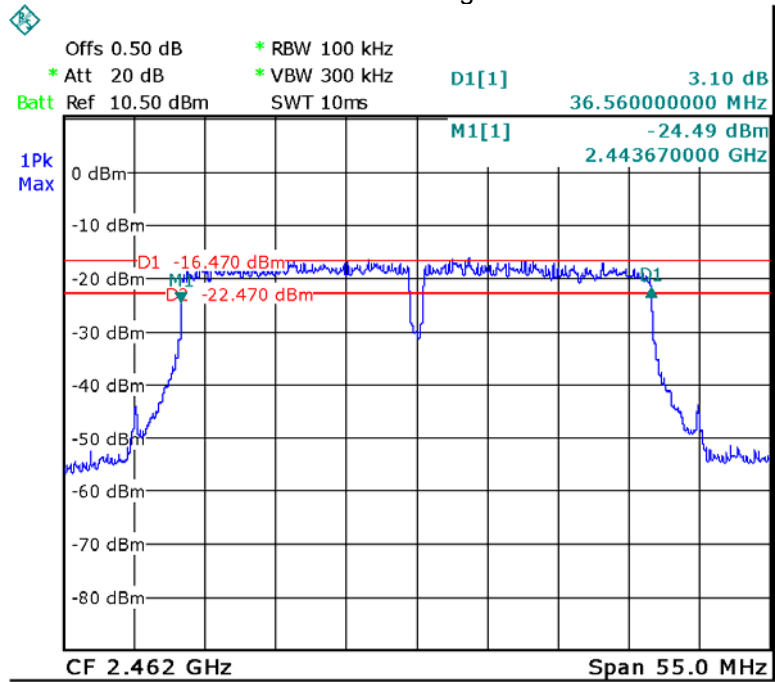

## 10 Maximum Peak Output Power

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB558074 D01 DTS Meas Guidance v03r04

### 10.1 Test Procedure:


KDB558074 D01 DTS Meas Guidance v03r04 section 9.1.2

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak, Set the span to fully encompass the DTS bandwidth.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


### 10.2 Test Result:



Operation mode	ANT	Maximum Peak Output Power (dBm)		
		Low	Middle	High
11b	ANT0	8.63	8.44	8.55
	ANT1	8.61	8.43	8.53
11g	ANT0	9.82	9.85	9.46
	ANT1	9.67	9.75	8.2
11n HT20	ANT0	9.41	9.75	9.72
	ANT1	9.46	9.56	9.39
	ANT0+ANT1	12.45	12.67	12.57
11n HT40	ANT0	8.54	8.86	8.26
	ANT1	8.43	8.55	8.09
	ANT0+ANT1	11.50	11.72	11.19
Limit				
1W/30dBm				

ANT0 TX 11b Low channel

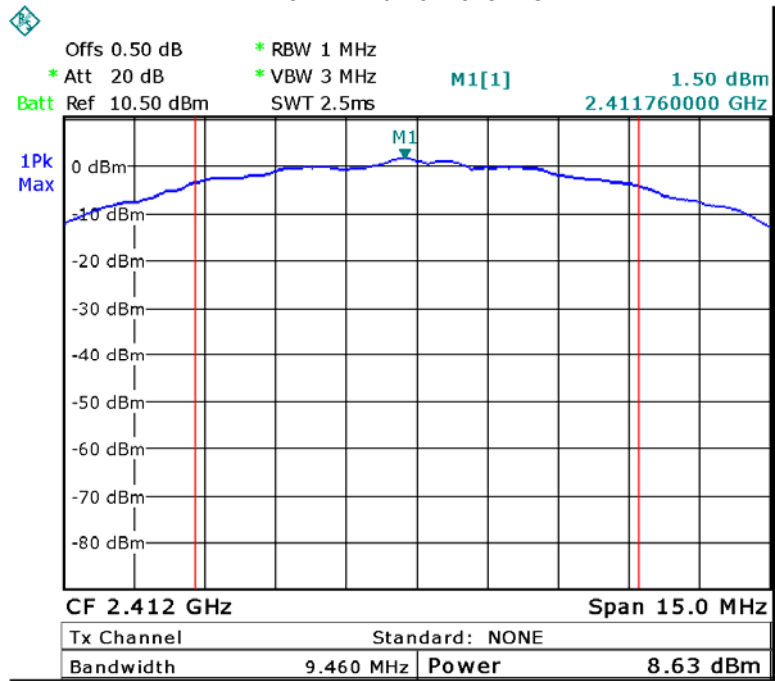


ANT0 TX 11b Middle channel

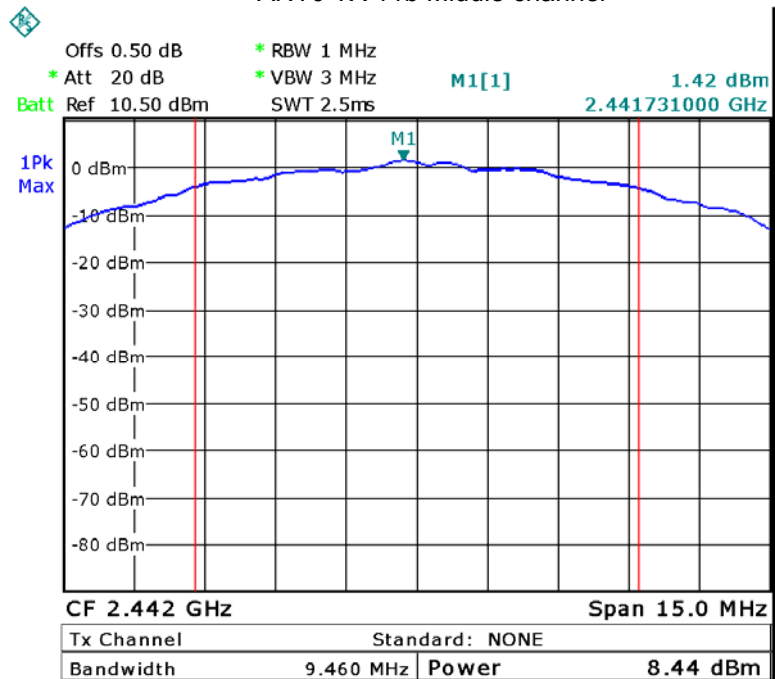


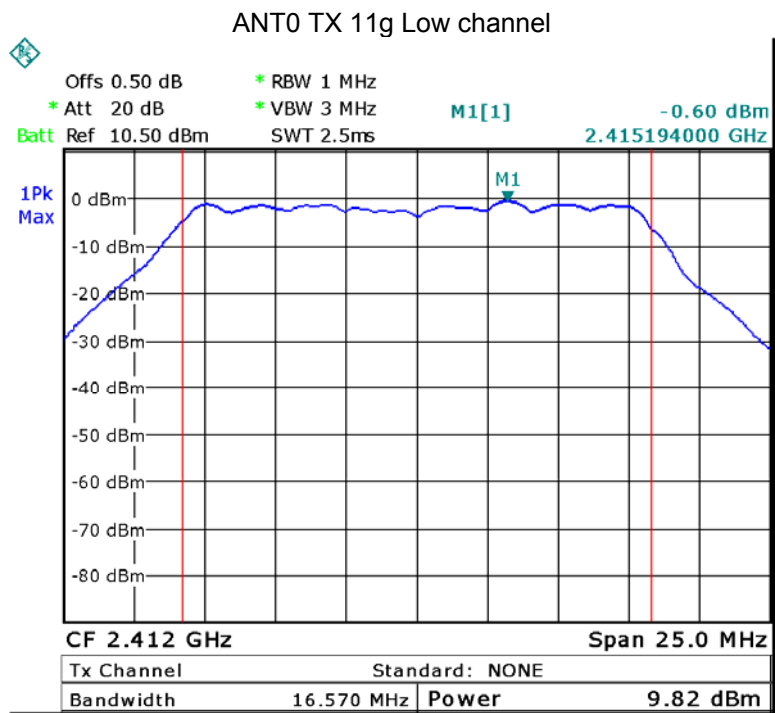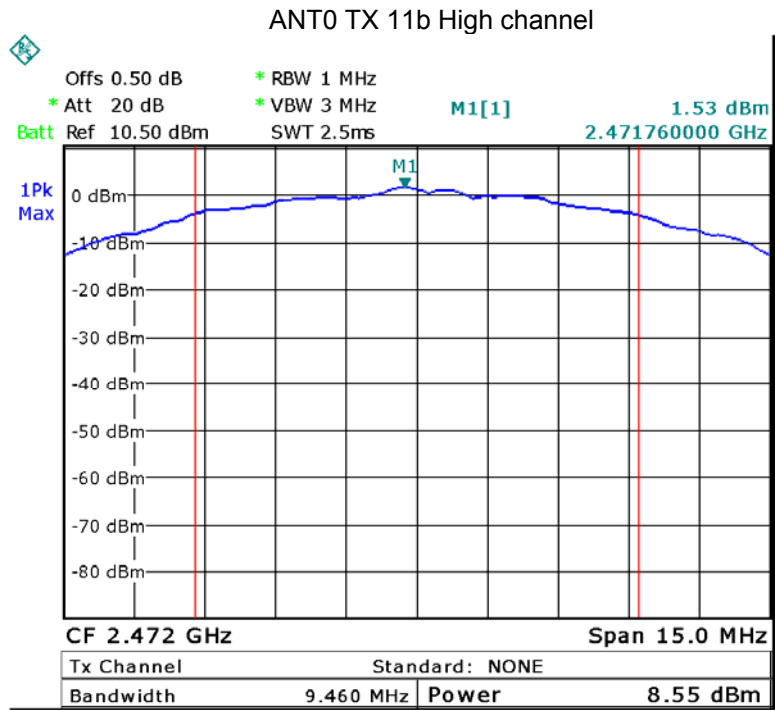


ANT0 TX 11g Middle channel

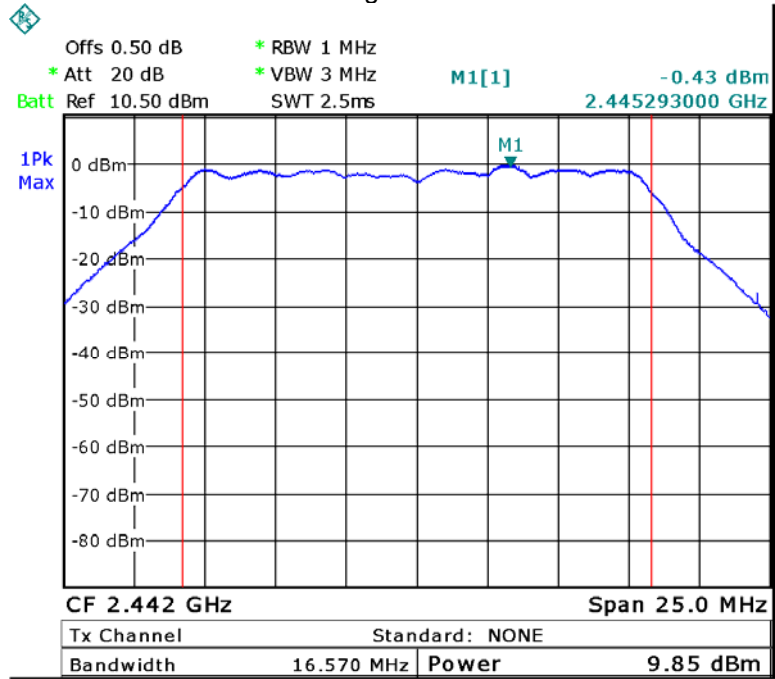


ANT0 TX 11g High channel

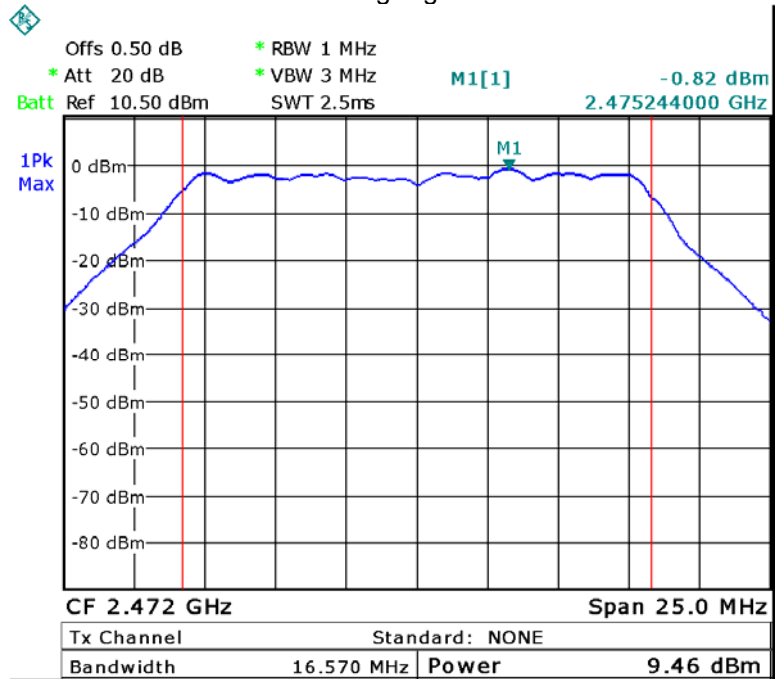


ANT0 TX 11n HT20 Low channel

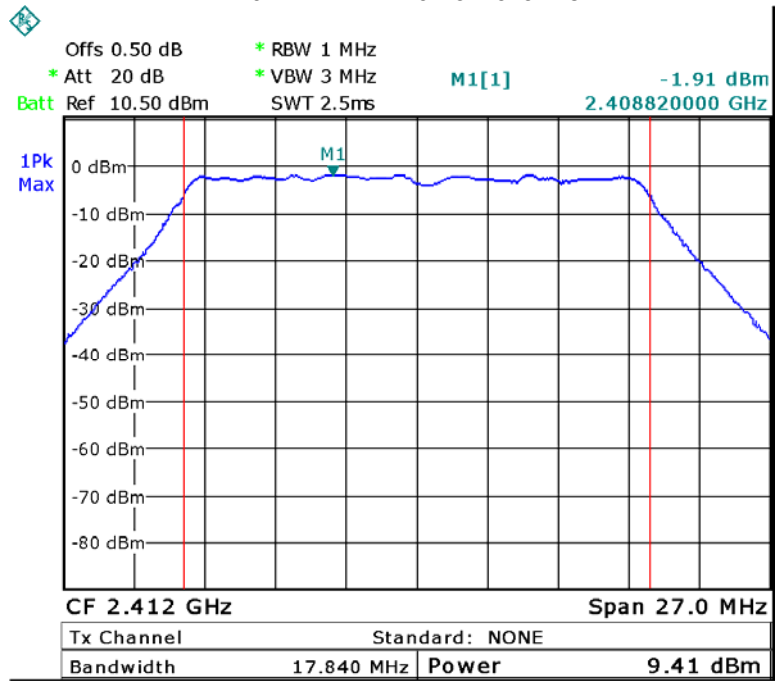


ANT0 TX 11n HT20 Middle channel

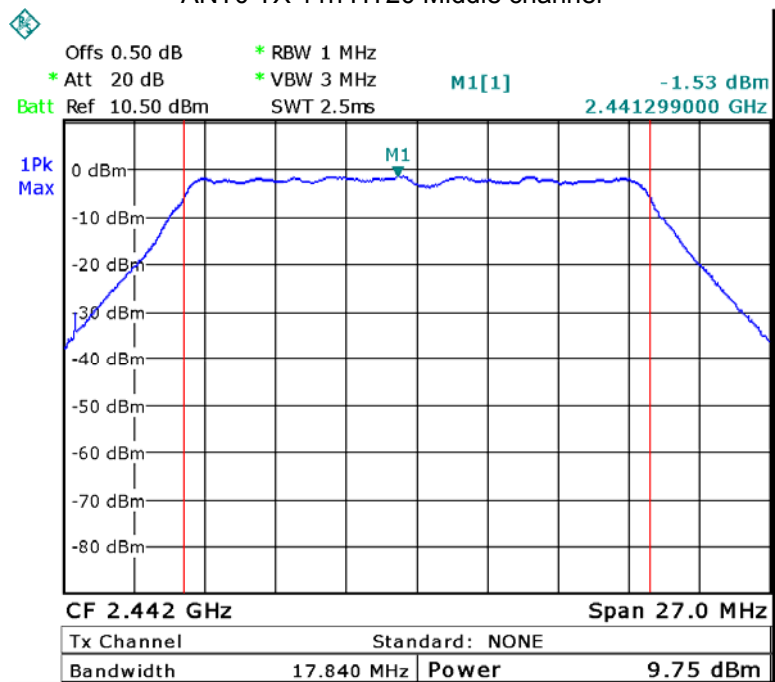


ANT0 TX 11n HT20 High channel

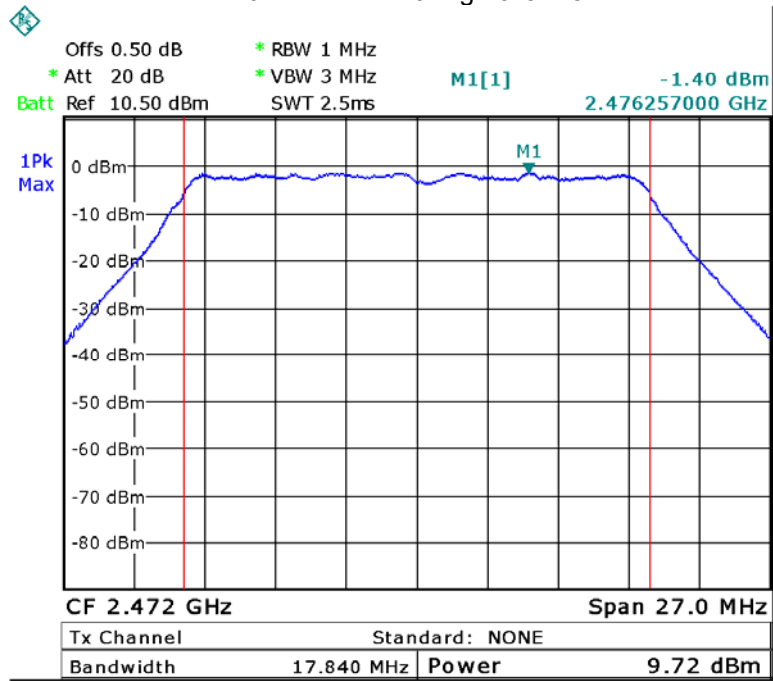


ANT0 TX 11n HT40 Low channel

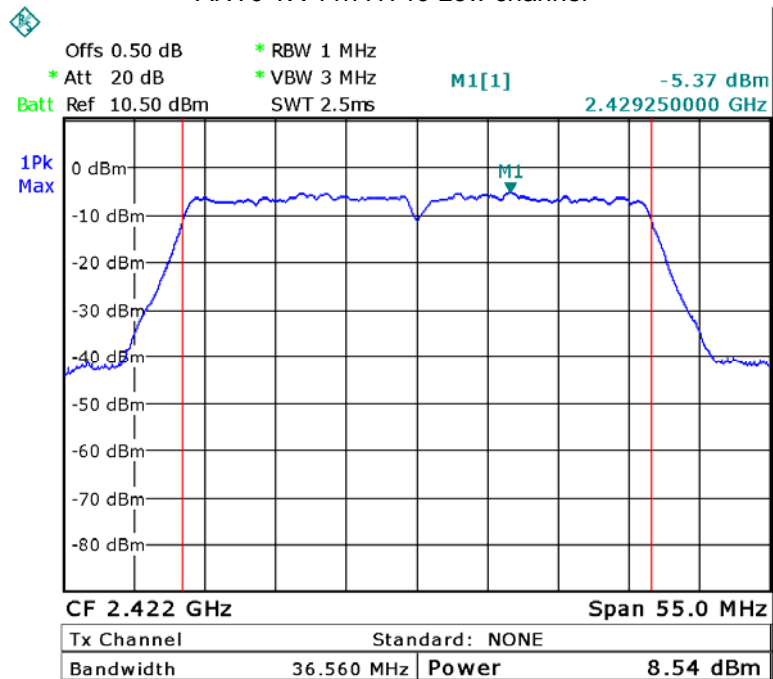


ANT0 TX 11n HT40 Middle channel

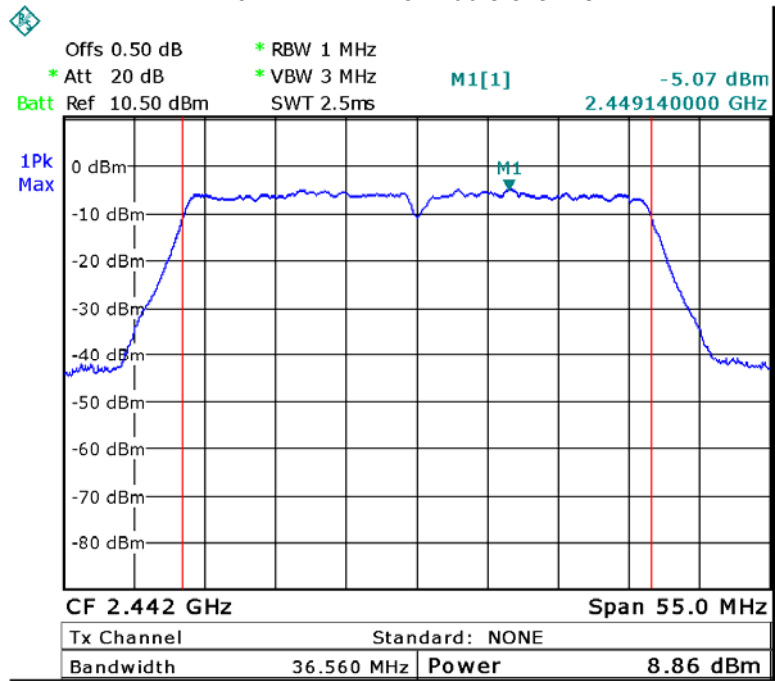


ANT0 TX 11n HT40 High channel

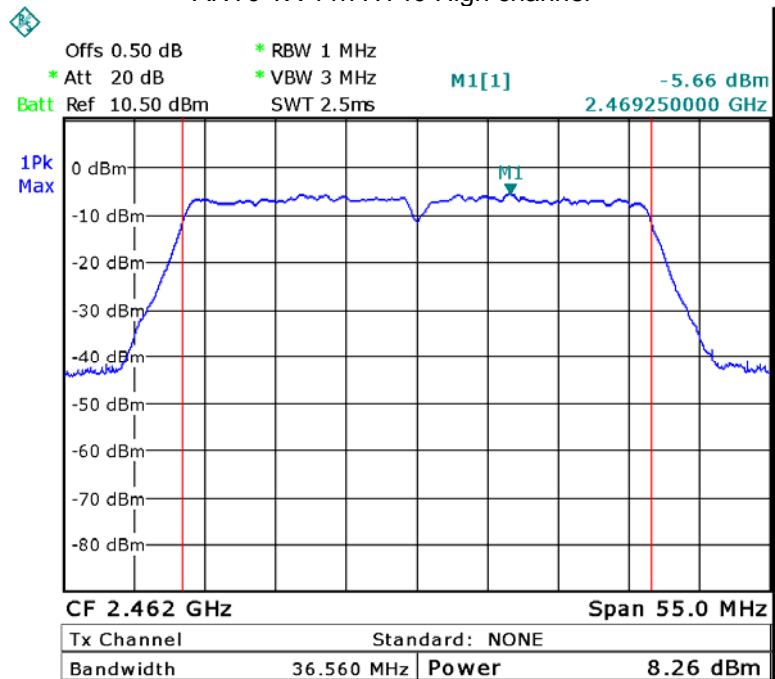


ANT1 TX 11b Low channel

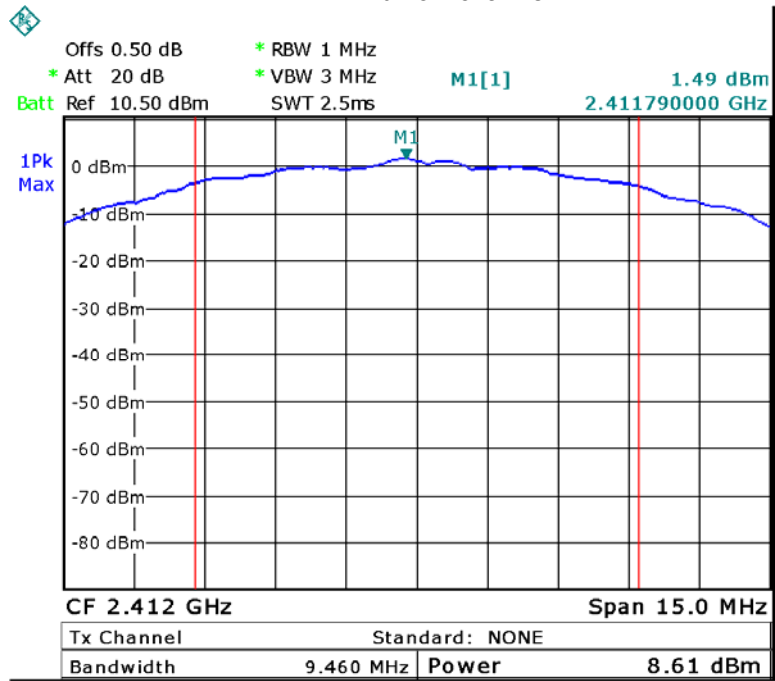


ANT1 TX 11b Middle channel

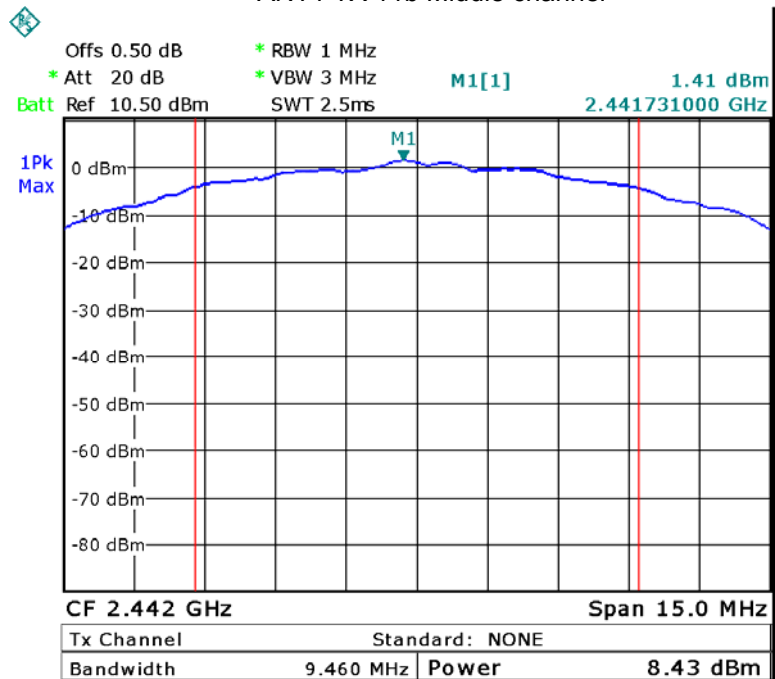


### ANT1 TX 11b High channel

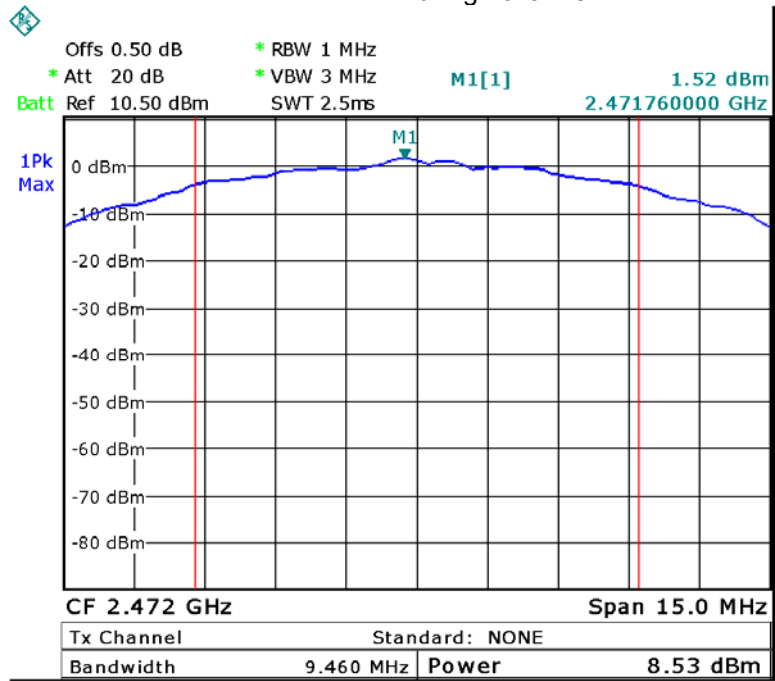


### ANT1 TX 11g Low channel

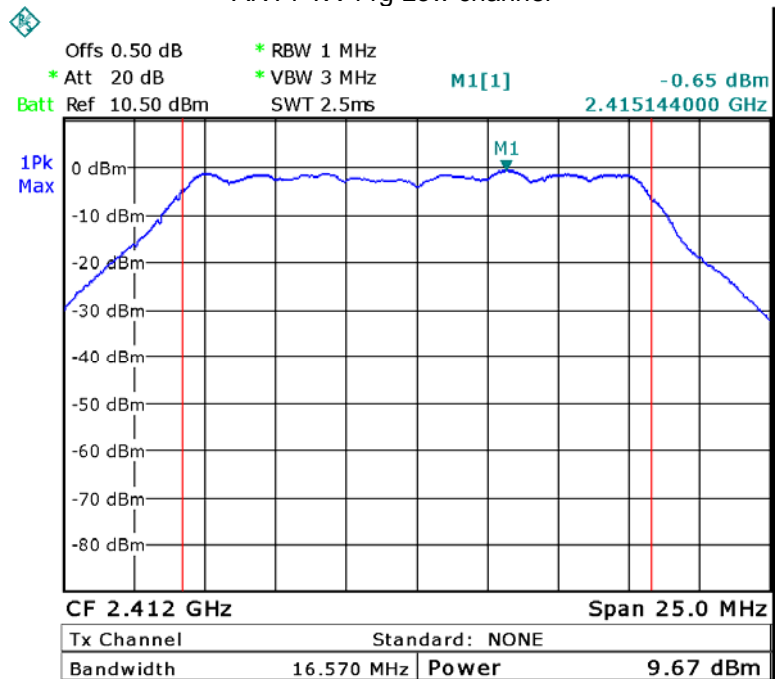


ANT1 TX 11g Middle channel

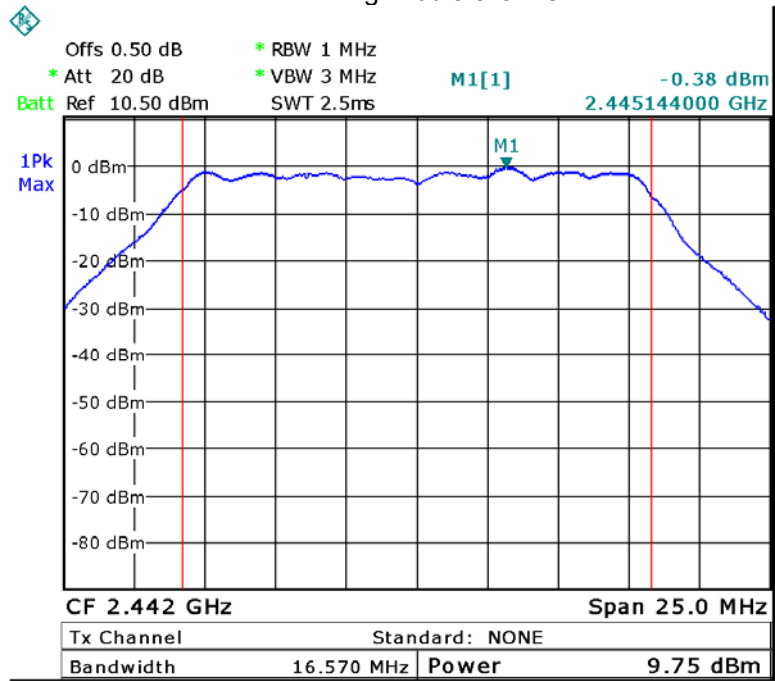


ANT1 TX 11g High channel

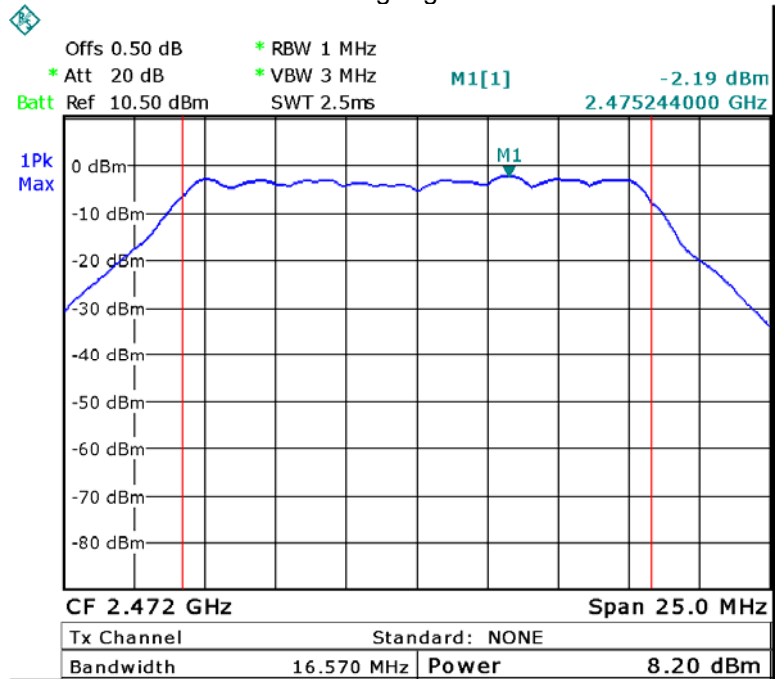


ANT1 TX 11n HT20 Low channel

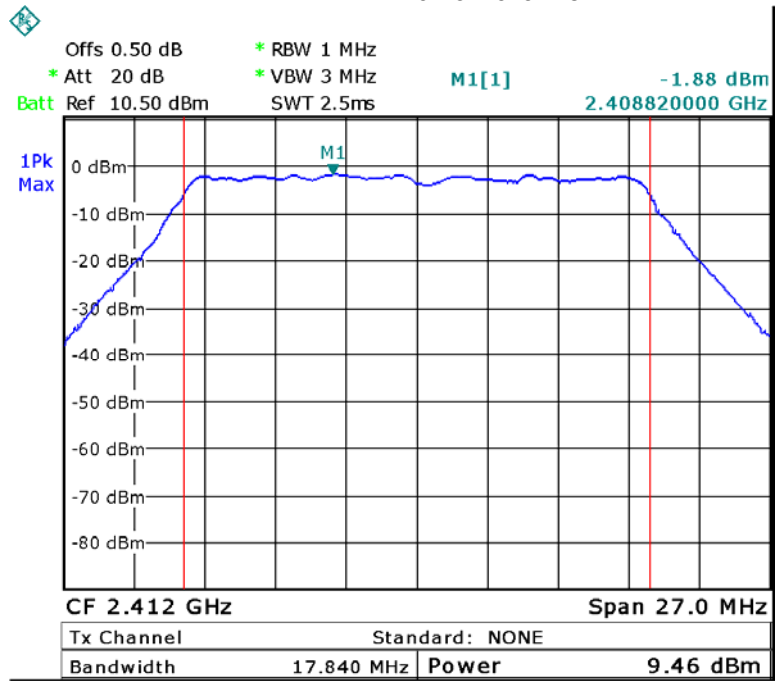


ANT1 TX 11n HT20 Middle channel

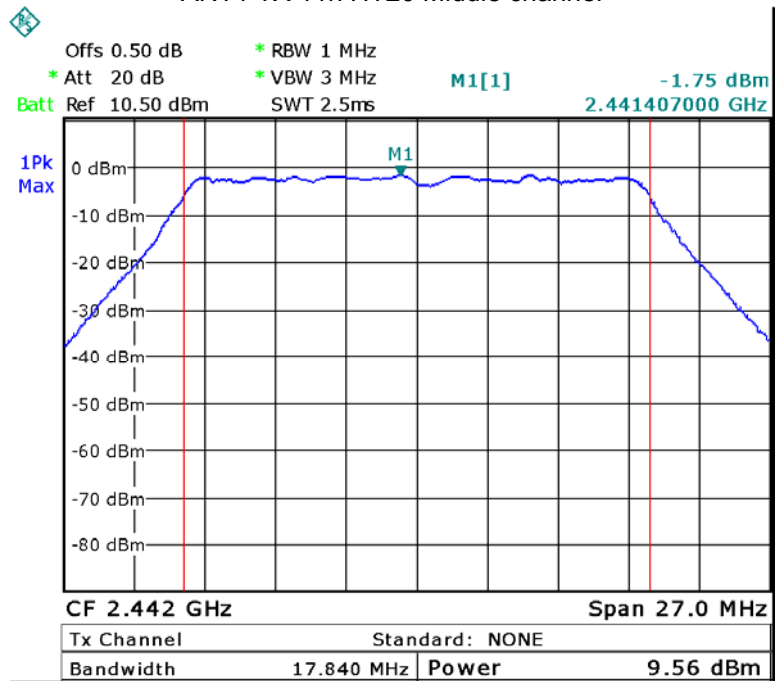


ANT1 TX 11n HT20 High channel

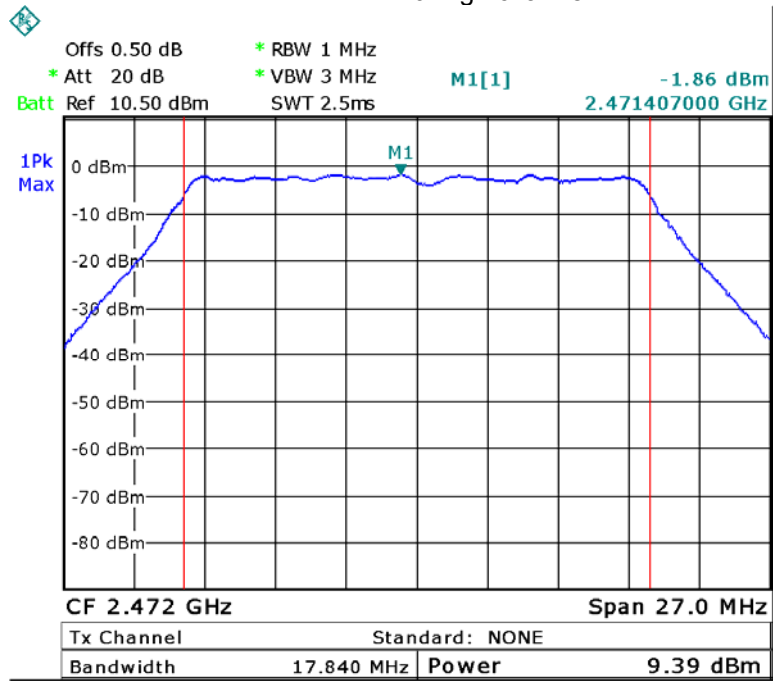


ANT1 TX 11n HT40 Low channel

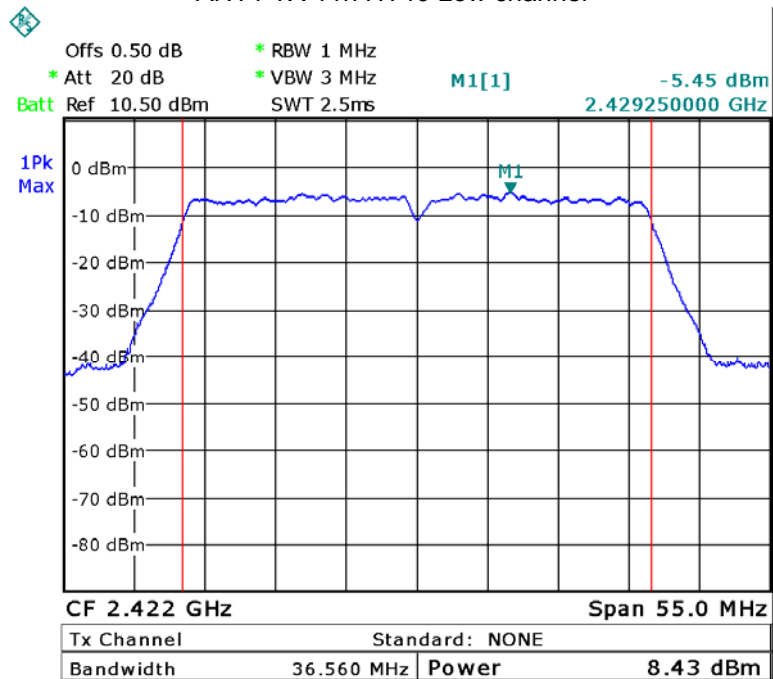

ANT1 TX 11n HT40 Middle channel

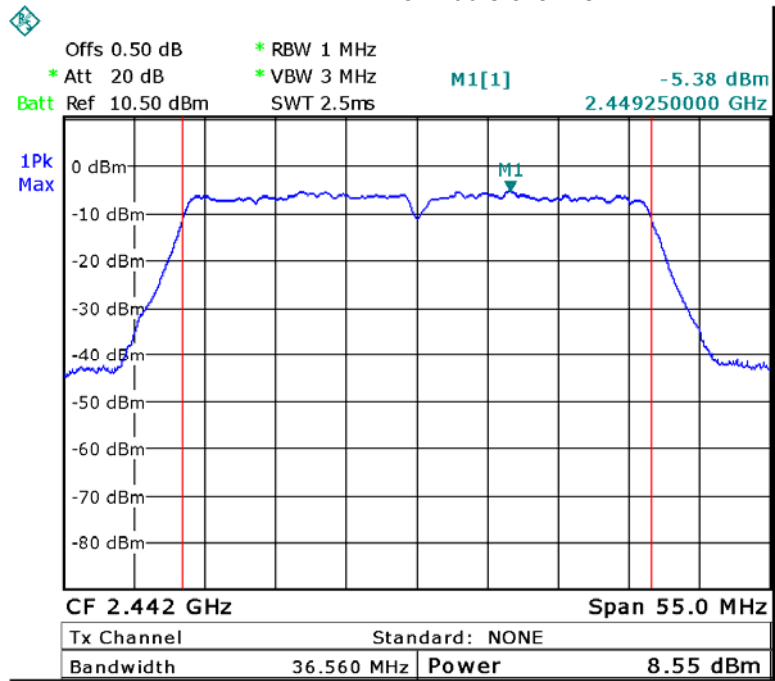

ANT1 TX 11n HT40 High channel

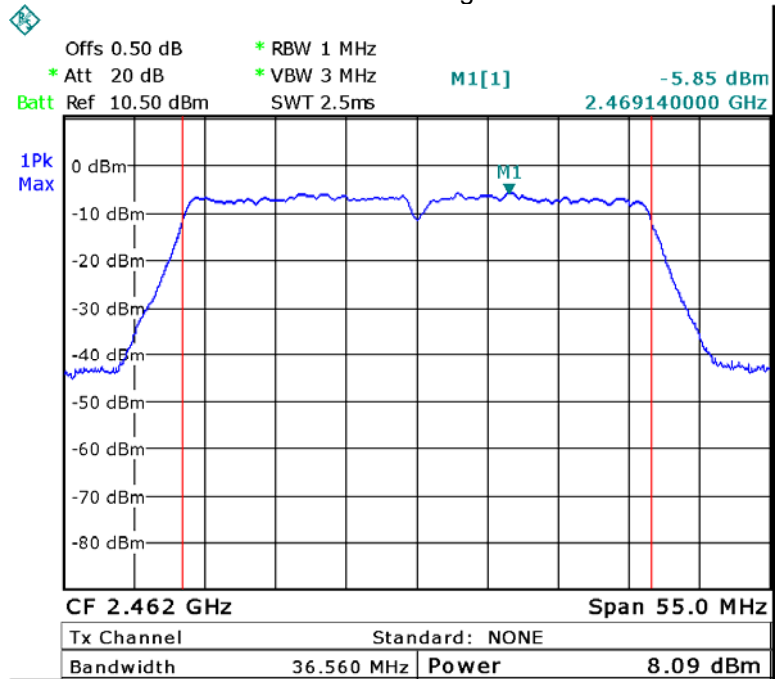

## 11 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB558074 D01 DTS Meas Guidance v03r04

### 11.1 Test Procedure:


KDB558074 D01 DTS Meas Guidance v03r04 section 10.2

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section  
Submit this plot.


### 11.2 Test Result:

Operation mode	ANT	Maximum Peak Output Power (dBm per 3kHz)		
		Low	Middle	High
11b	ANT0	-19.95	-20.76	-20.41
	ANT1	1.49	1.41	1.52
11g	ANT0	-25.66	-25.13	-27.11
	ANT1	-0.65	-0.38	-2.19
11n HT20	ANT0	-25.56	-25.5	-25.86
	ANT1	-1.88	-1.75	-1.86
	ANT0+ANT1	-1.86	-1.73	-1.84
11n HT40	ANT0	-27.99	-28.86	-29.15
	ANT1	-5.45	-5.38	-5.85
	ANT0+ANT1	-5.43	-5.36	-5.83
Limit				
8dBm per 3kHz				


### ANT0 TX 11b Low channel

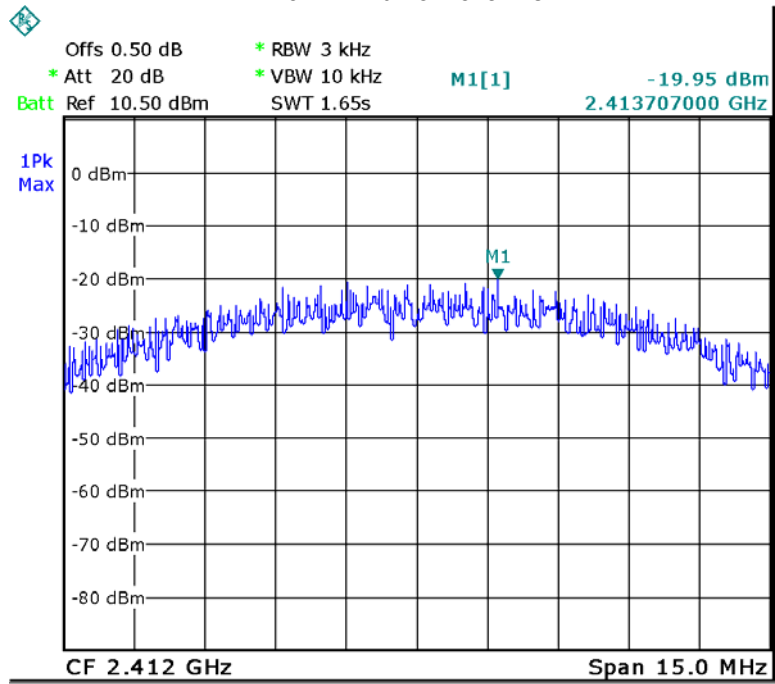


### ANT0 TX 11b Middle channel

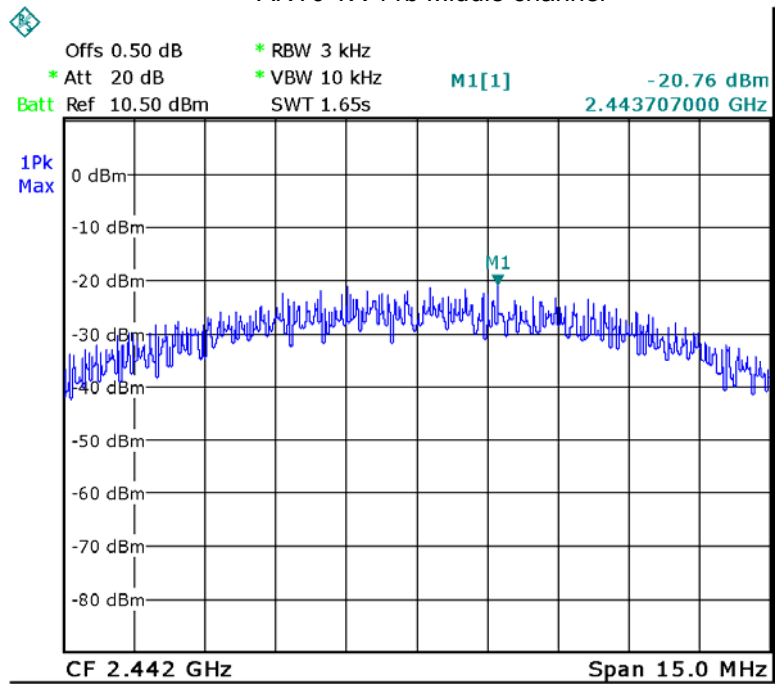


### ANT0 TX 11b High channel

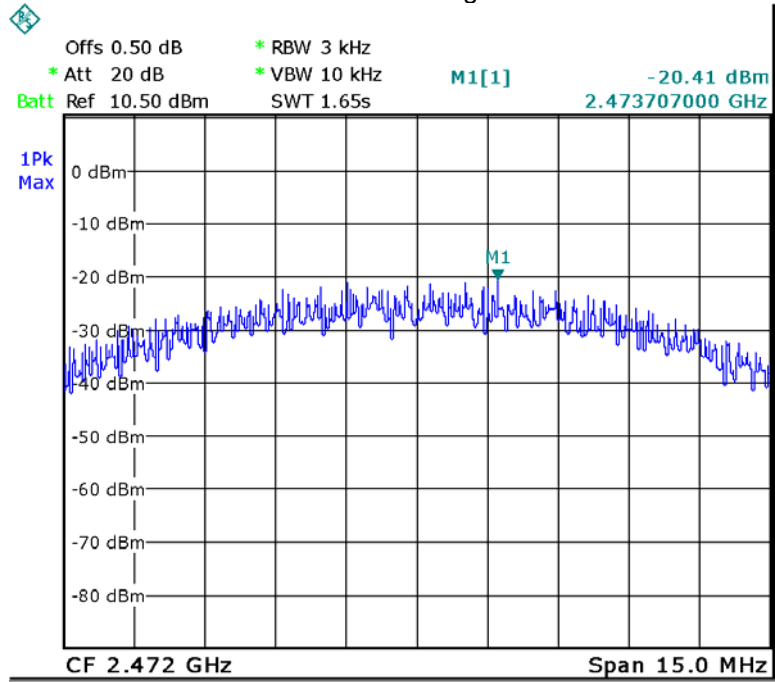


### ANT0 TX 11g Low channel

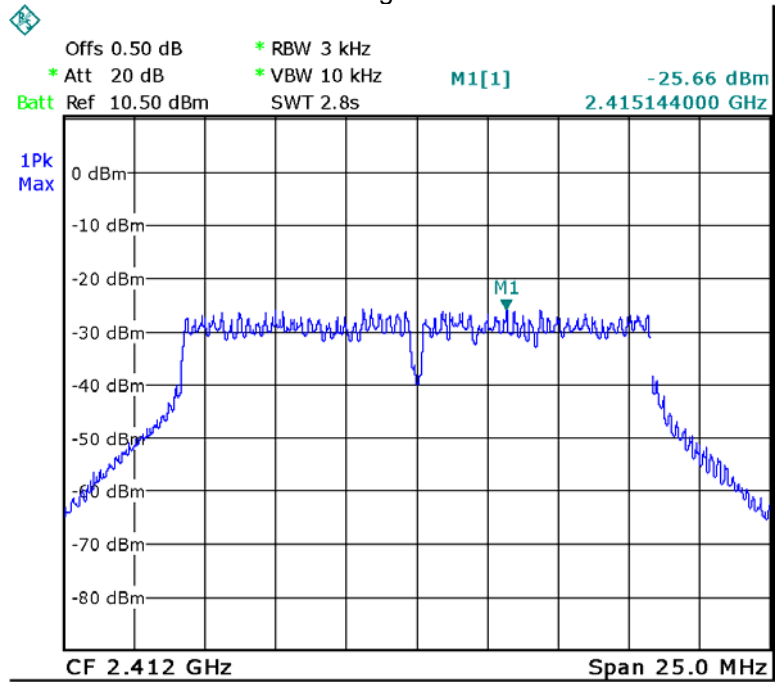


### ANT0 TX 11g Middle channel

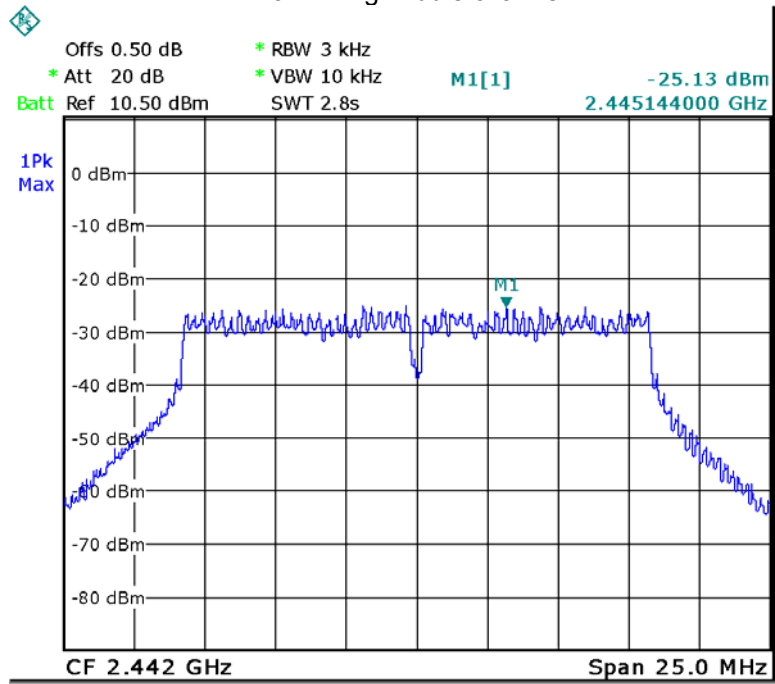


### ANT0 TX 11g High channel

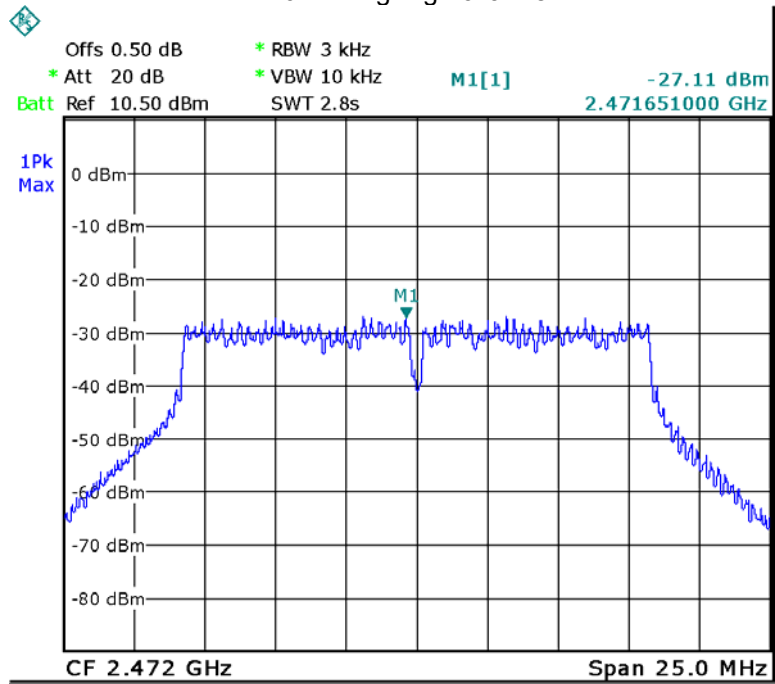


ANT0 TX 11n HT20 Low channel

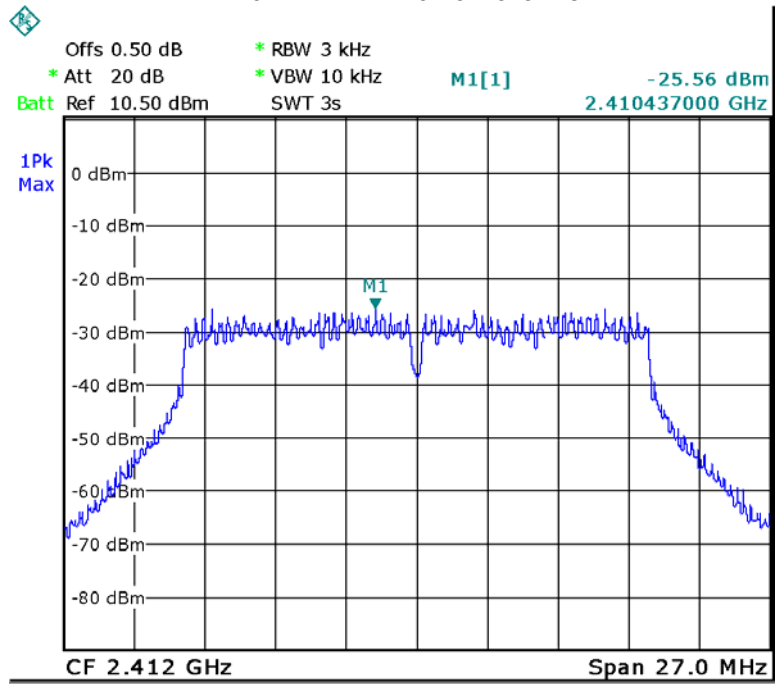


ANT0 TX 11n HT20 Middle channel

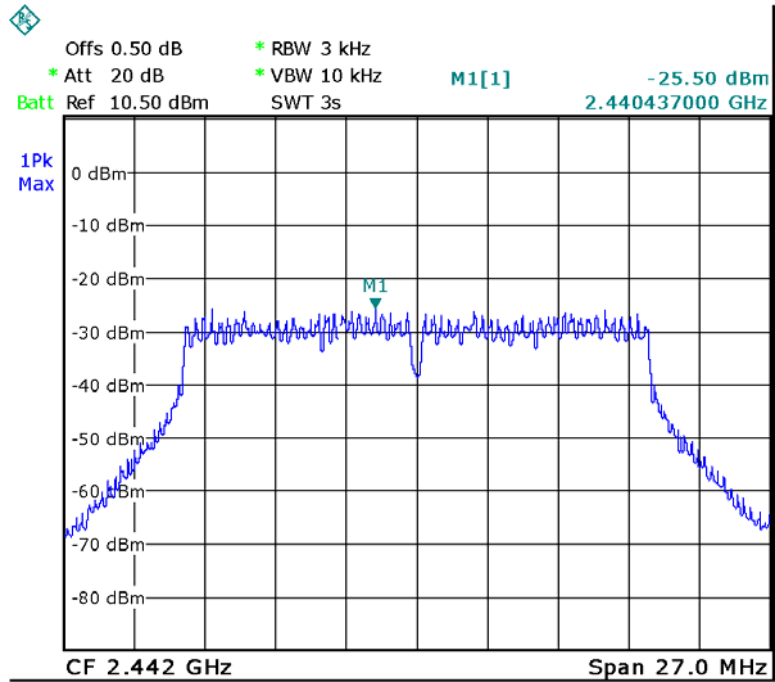


### ANT0 TX 11n HT20 High channel

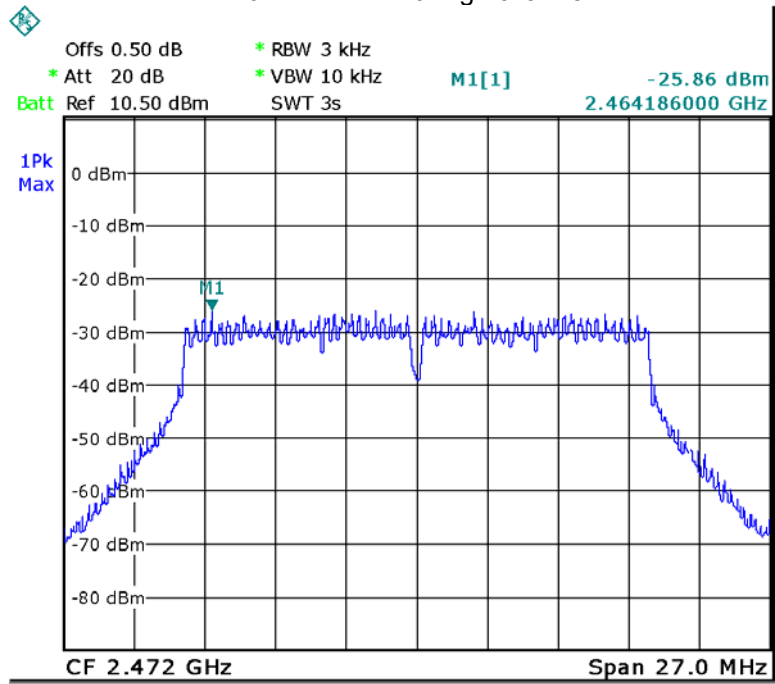


### ANT0 TX 11n HT40 Low channel

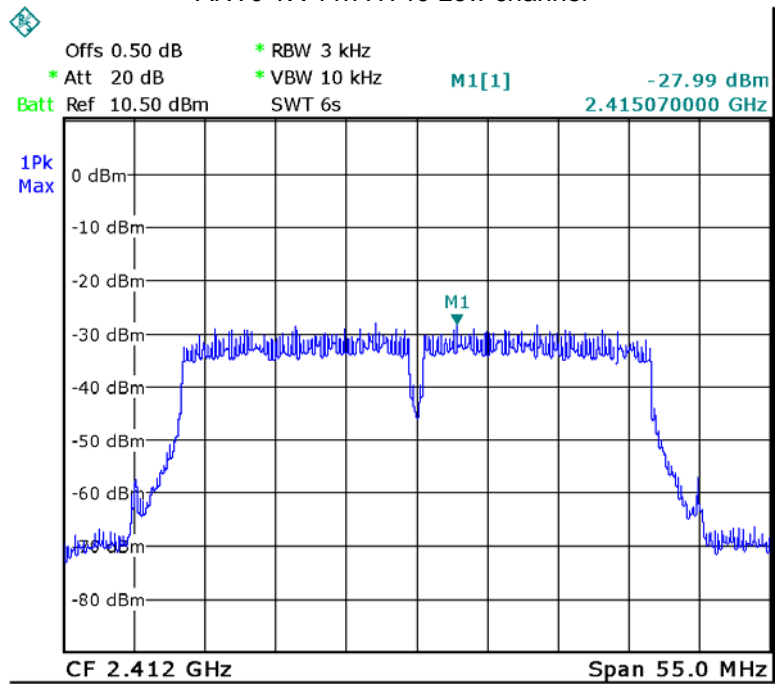


### ANT0 TX 11n HT40 Middle channel

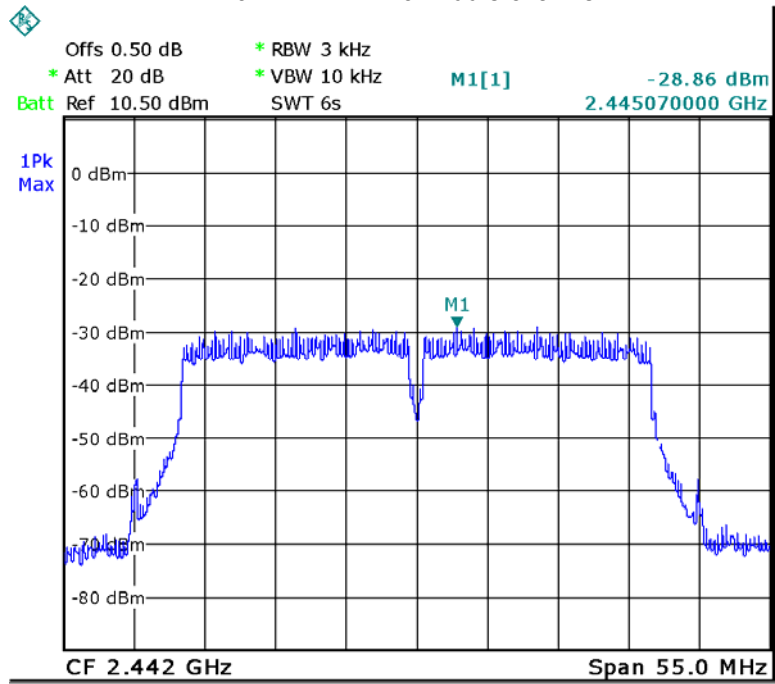


### ANT0 TX 11n HT40 High channel

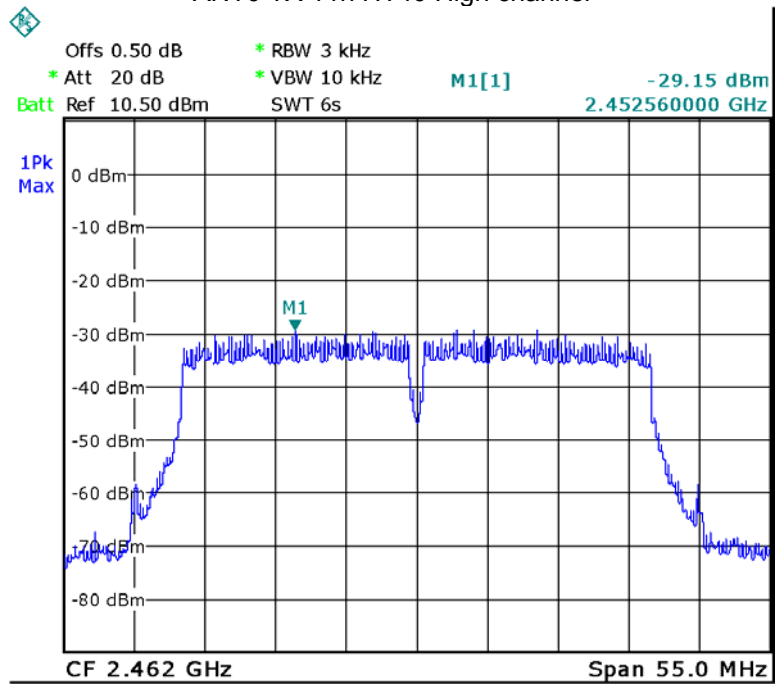


### ANT1 TX 11b Low channel

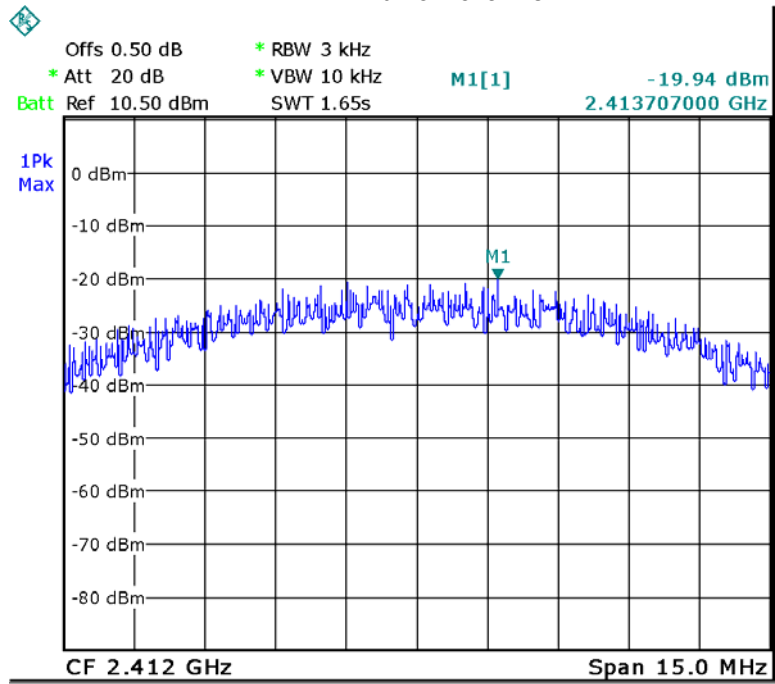


### ANT1 TX 11b Middle channel

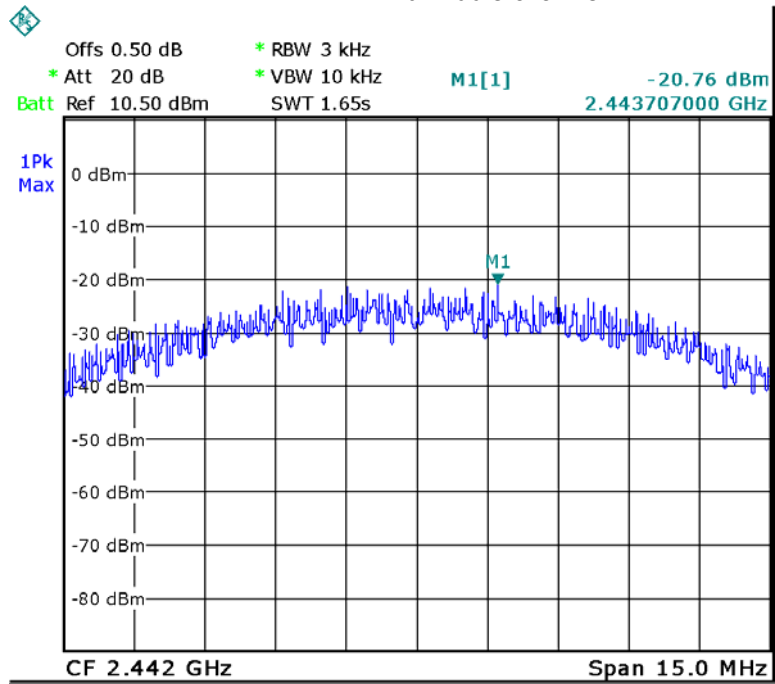


### ANT1 TX 11b High channel

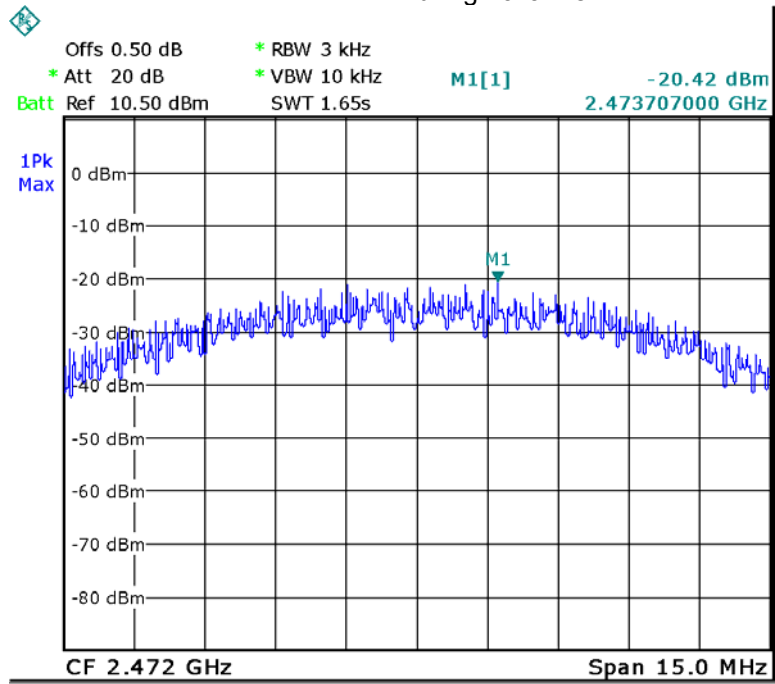


### ANT1 TX 11g Low channel

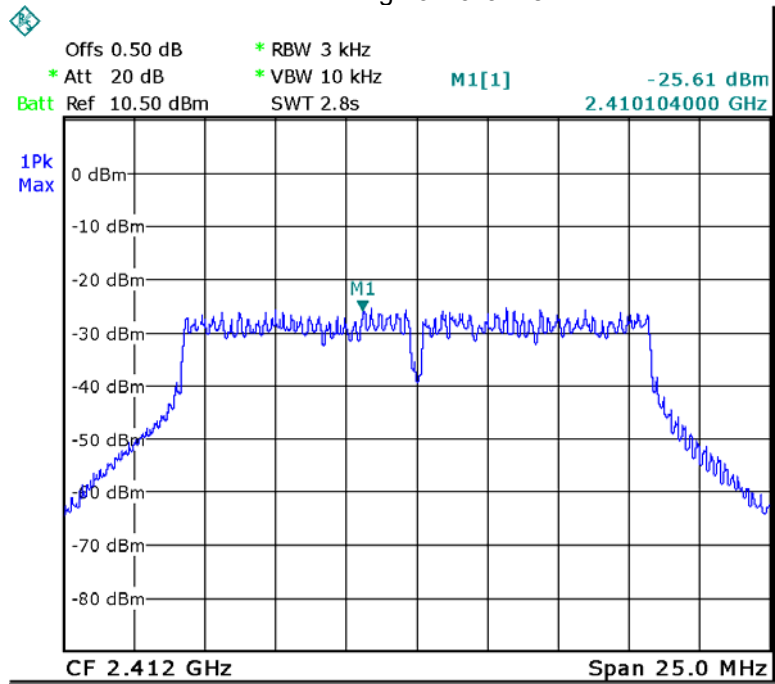


### ANT1 TX 11g Middle channel

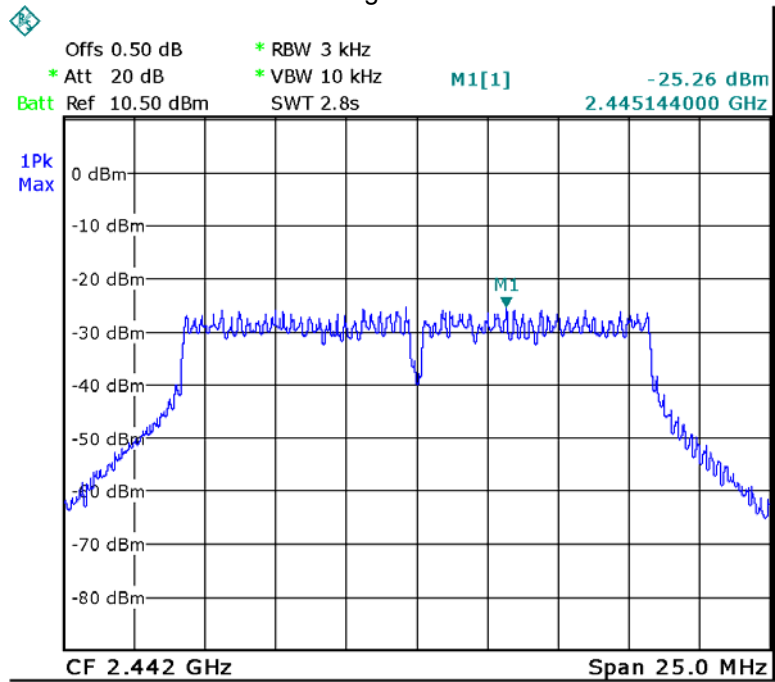


### ANT1 TX 11g High channel

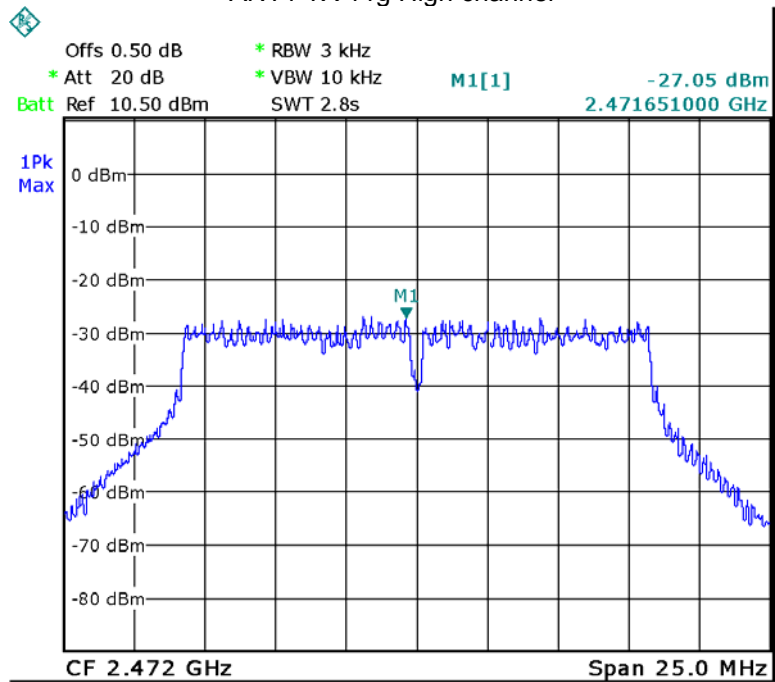


### ANT1 TX 11n HT20 Low channel

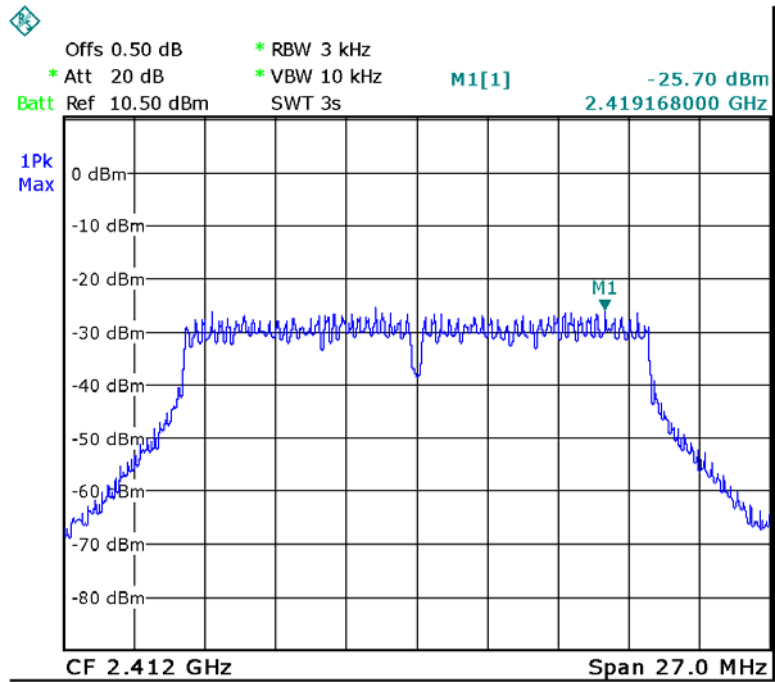


### ANT1 TX 11n HT20 Middle channel

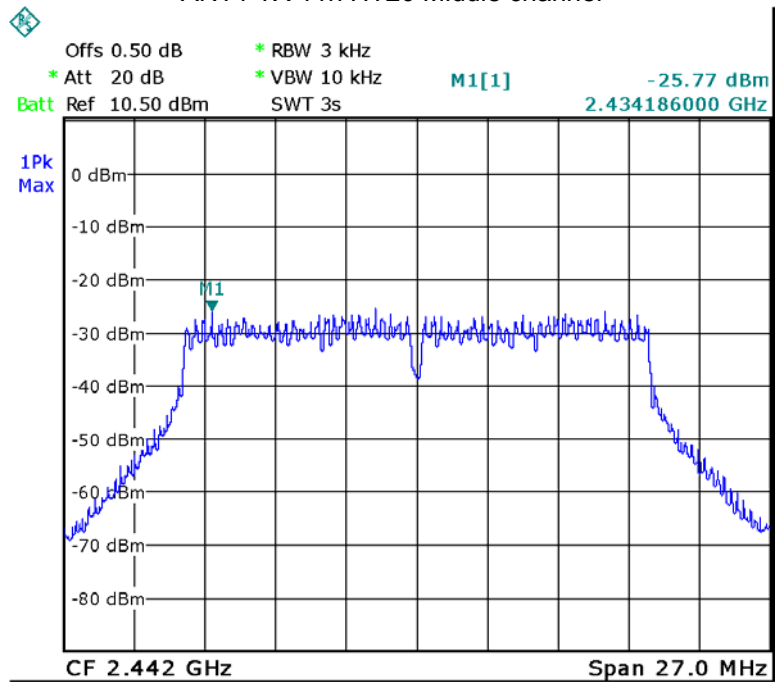


### ANT1 TX 11n HT20 High channel

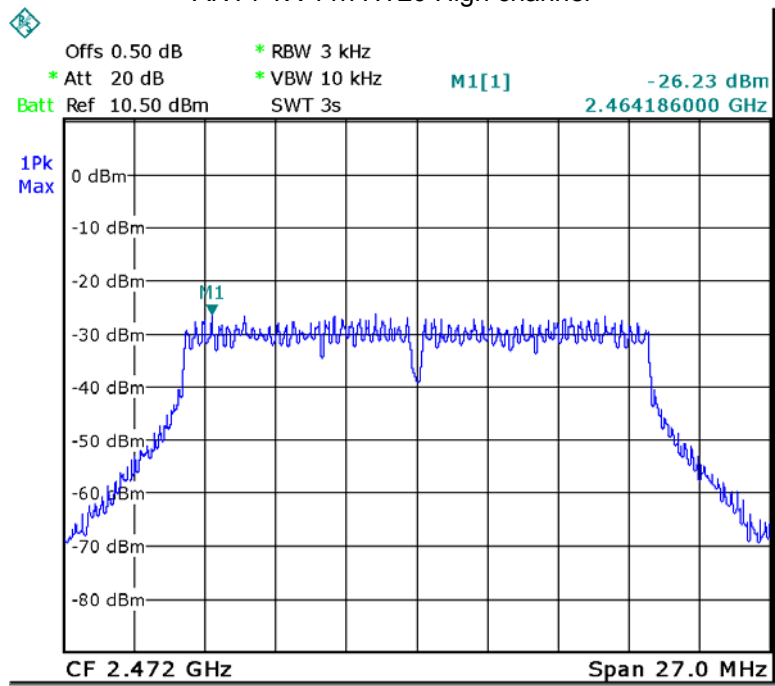


### ANT1 TX 11n HT40 Low channel

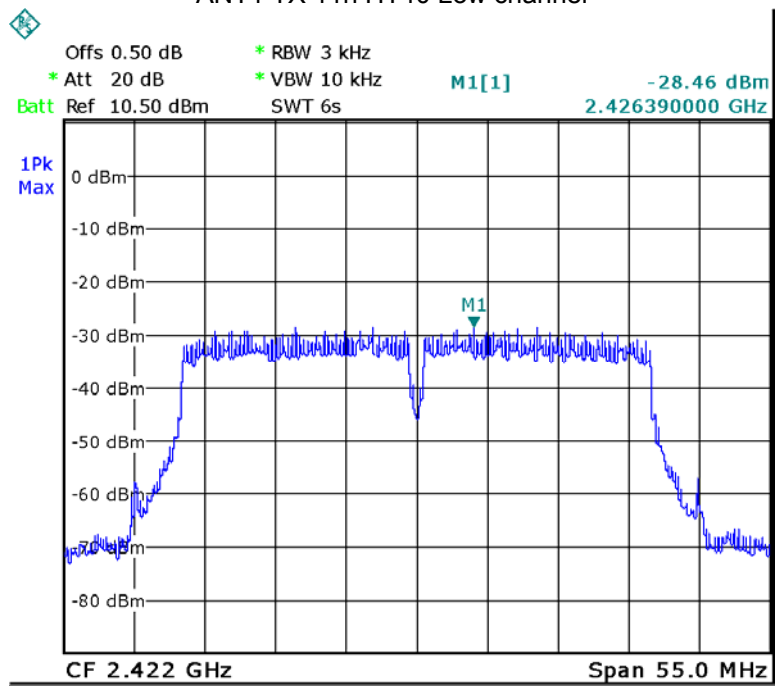

### ANT1 TX 11n HT40 Middle channel

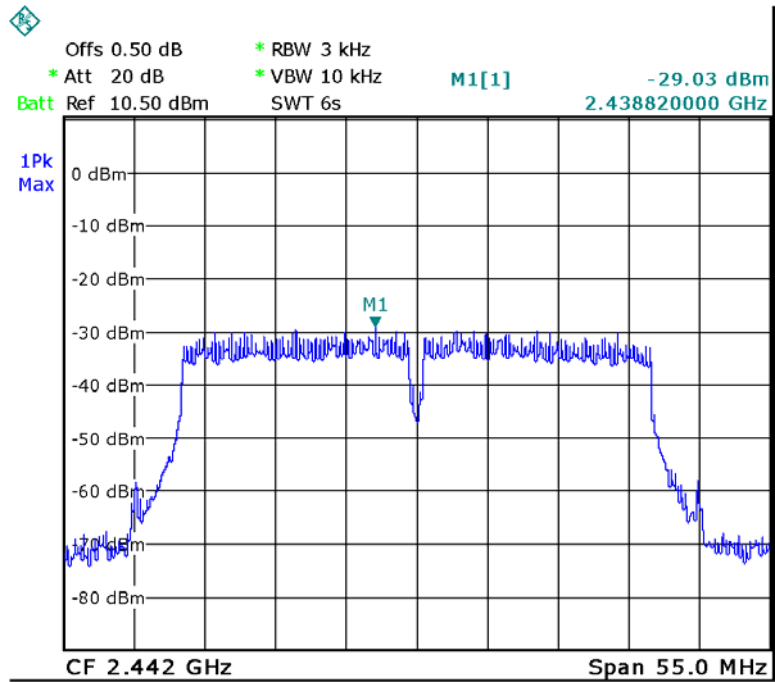

### ANT1 TX 11n HT40 High channel

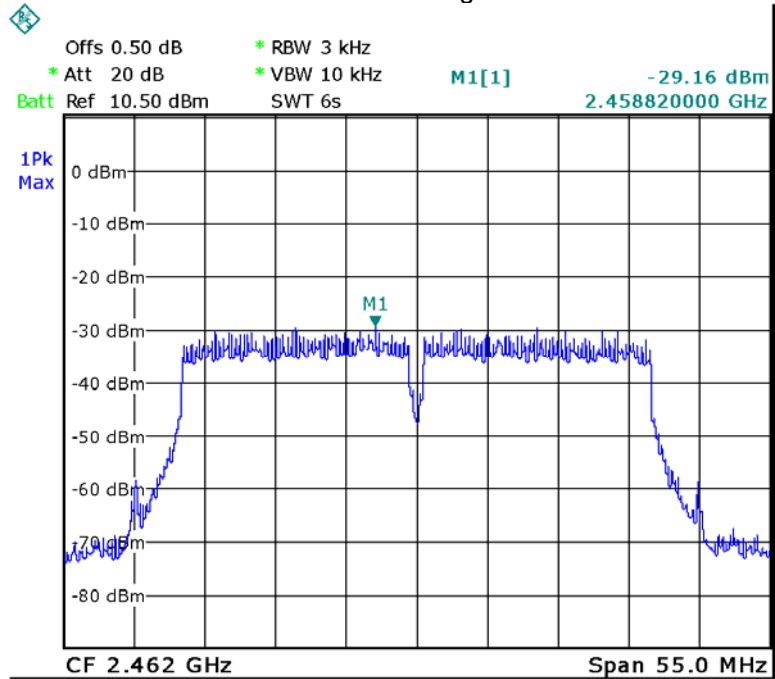

## **12 Antenna Requirement**

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an embedded-in antenna fulfill the requirement of this section.

## 13 RF Exposure

Test Requirement: FCC Part 1.1307  
 Evaluation Method: FCC Part 2.1091

### 13.1 Requirements

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

### 13.2 The procedures / limit

#### (A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

#### (B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; \*Plane-wave equivalent power density

### 13.3 MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

**E** = Electric field (V/m)

**P** = Peak RF output power (W)

**G** = EUT Antenna numeric gain (numeric)

**d** = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained

Antenna Gain (dBi)	Antenna Gain (numeric)	Max. Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (mW/cm <sup>2</sup> )	Limit of Power Density (mW/cm <sup>2</sup> )
3.00	1.995	12.67	18.49	0.007340	1


## 14 Photographs – Model WD50UT4490 Test Setup

### 14.1 Conducted Emission




### 14.2 Radiated Emission

Test frequency below 30MHz

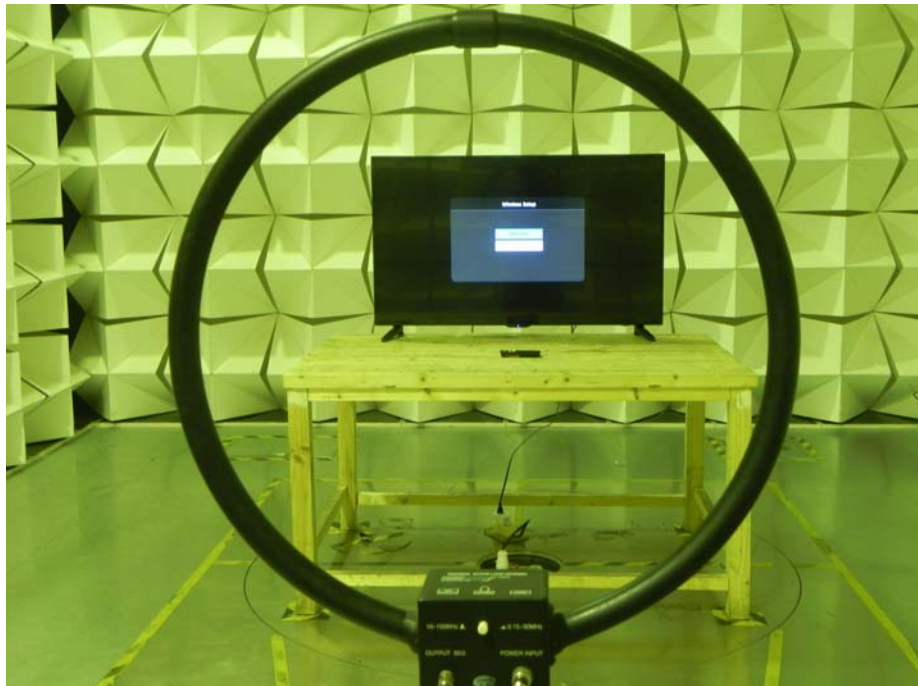

Test frequency from 30MHz to 1GHz

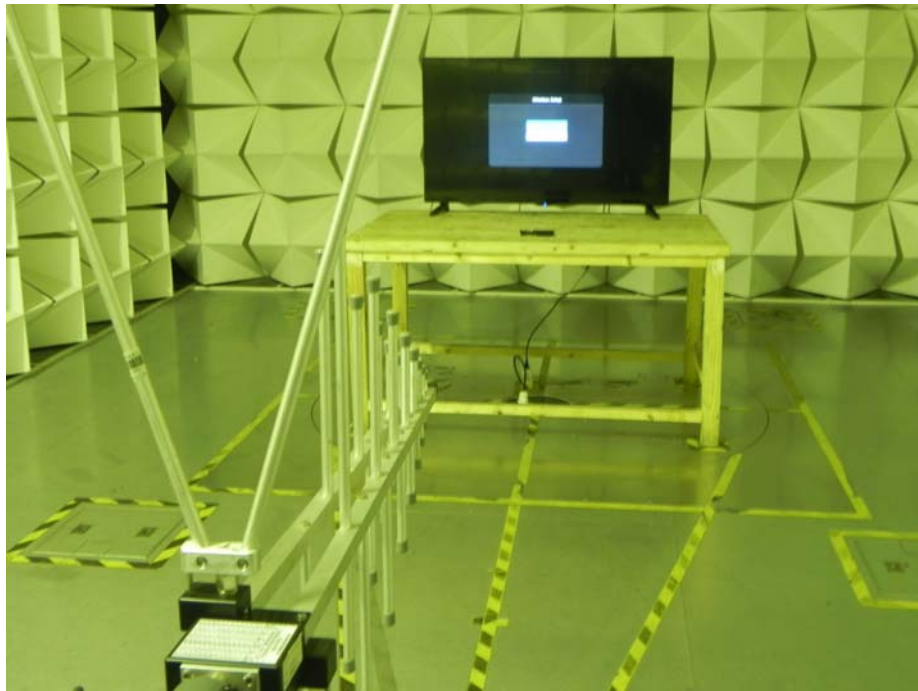

Test frequency above 1GHz



## 15 Photographs - Constructional Details

### 15.1 Model WD50UT4490 – External View


















### 15.2 Model WD50UT4490– Internal View

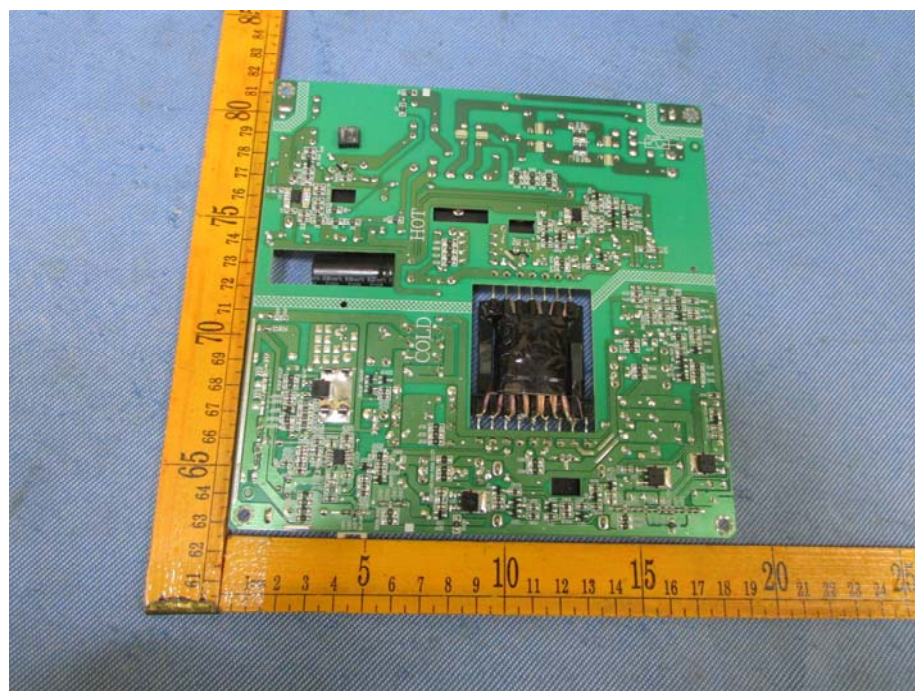
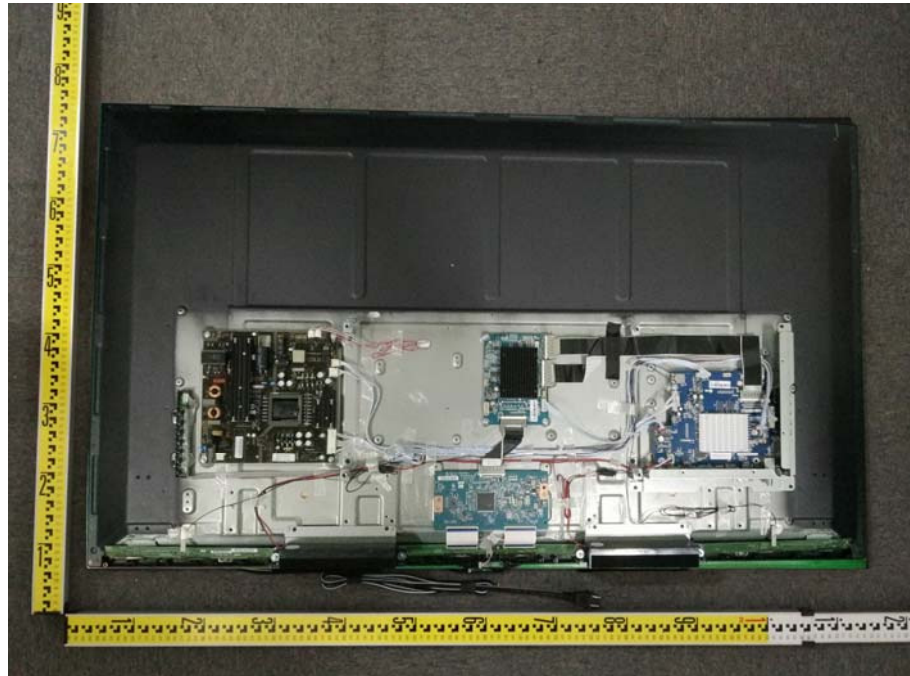


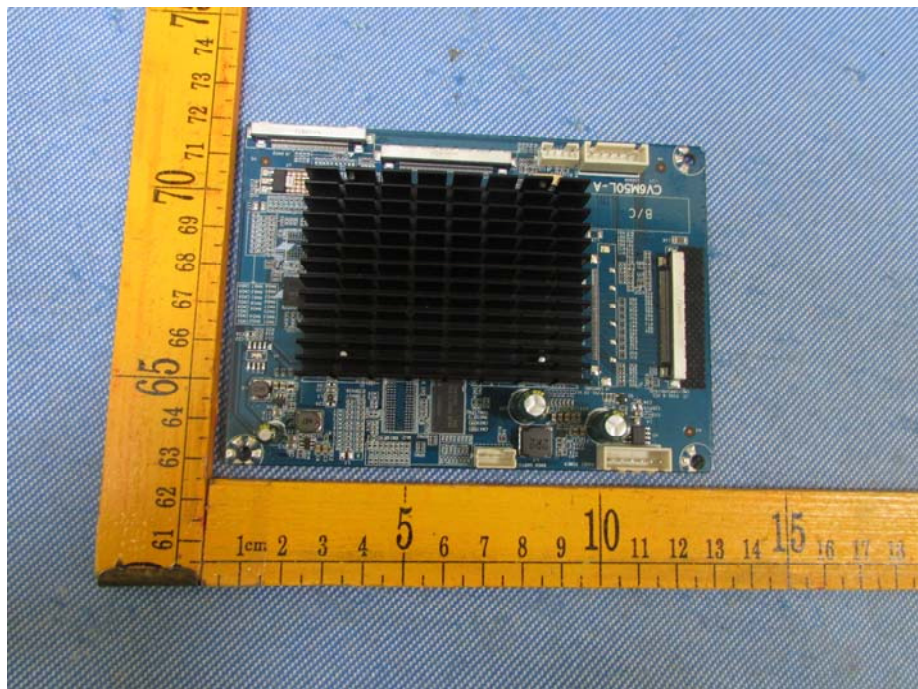
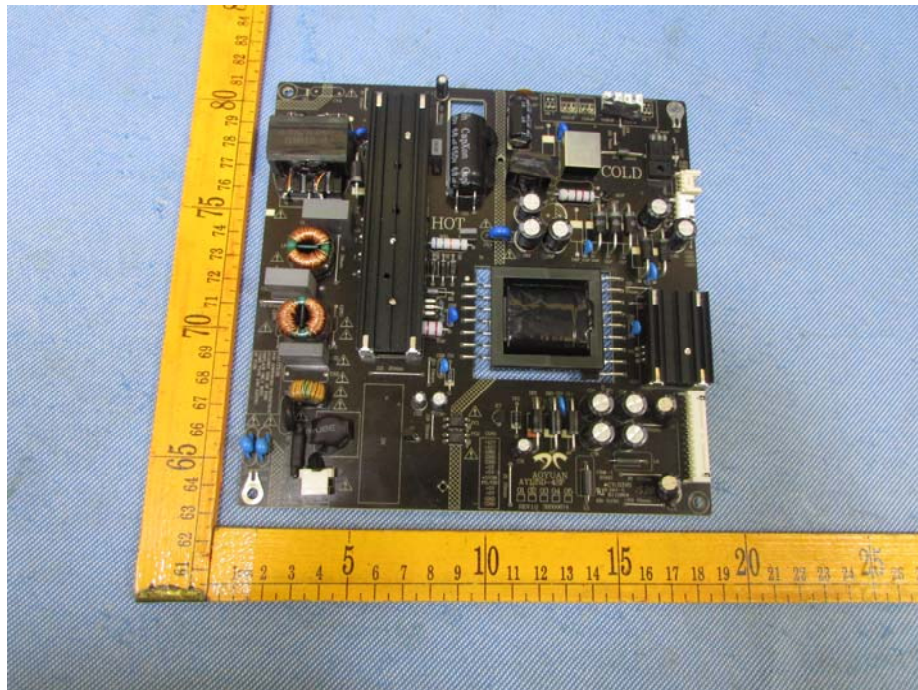


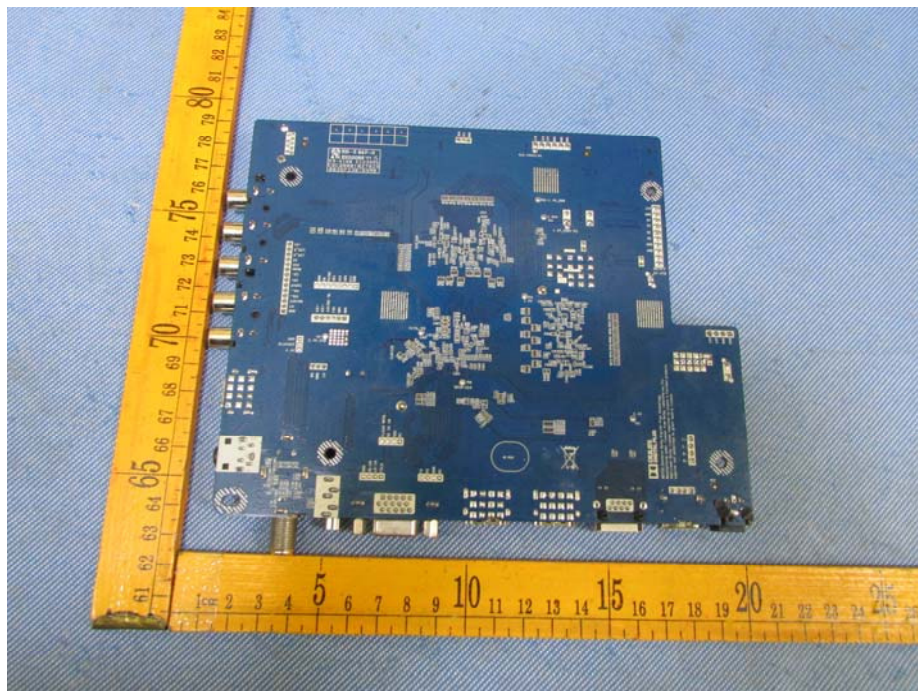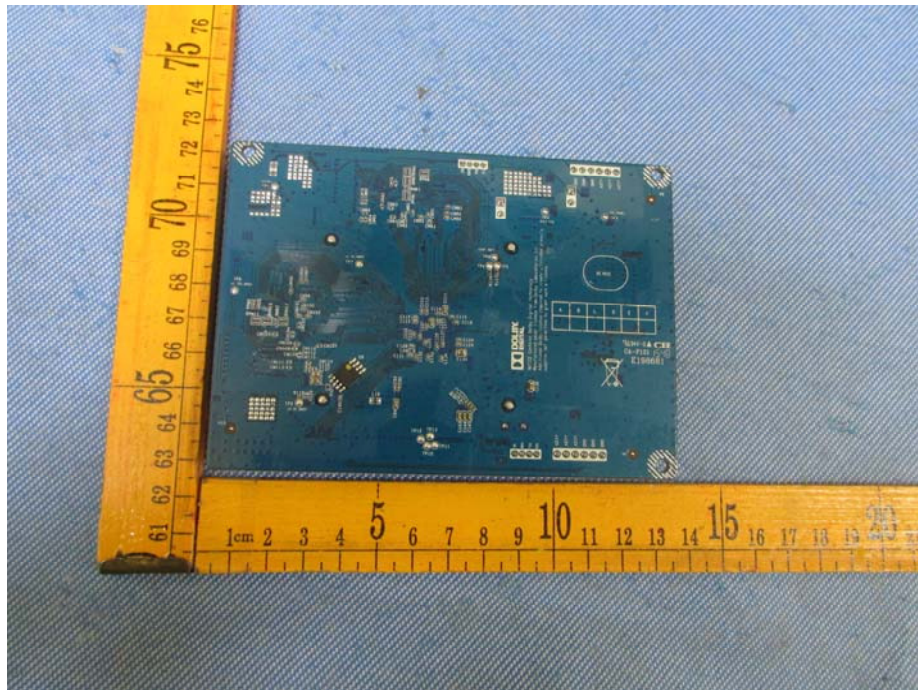


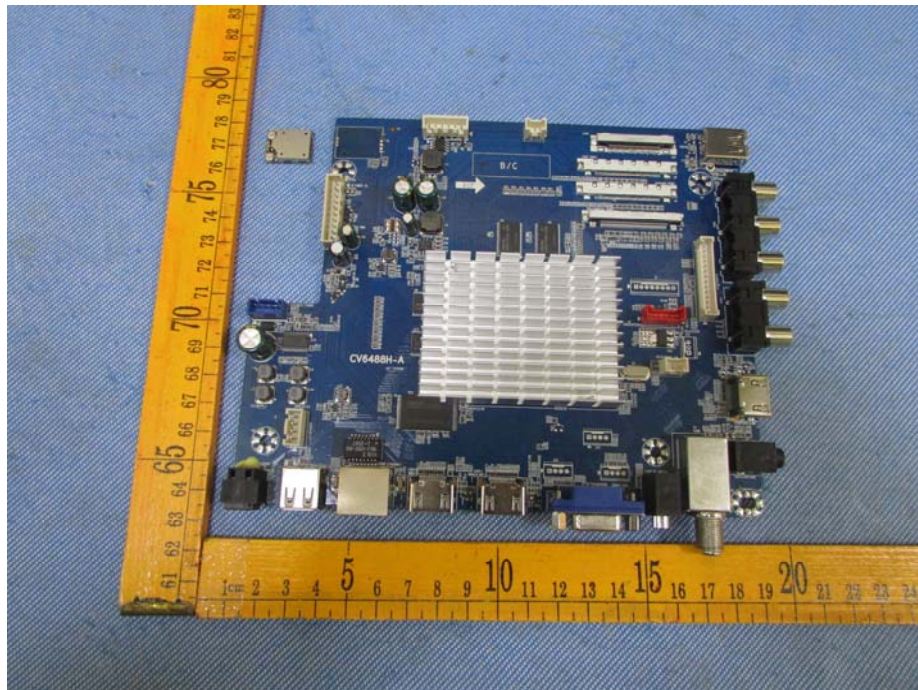

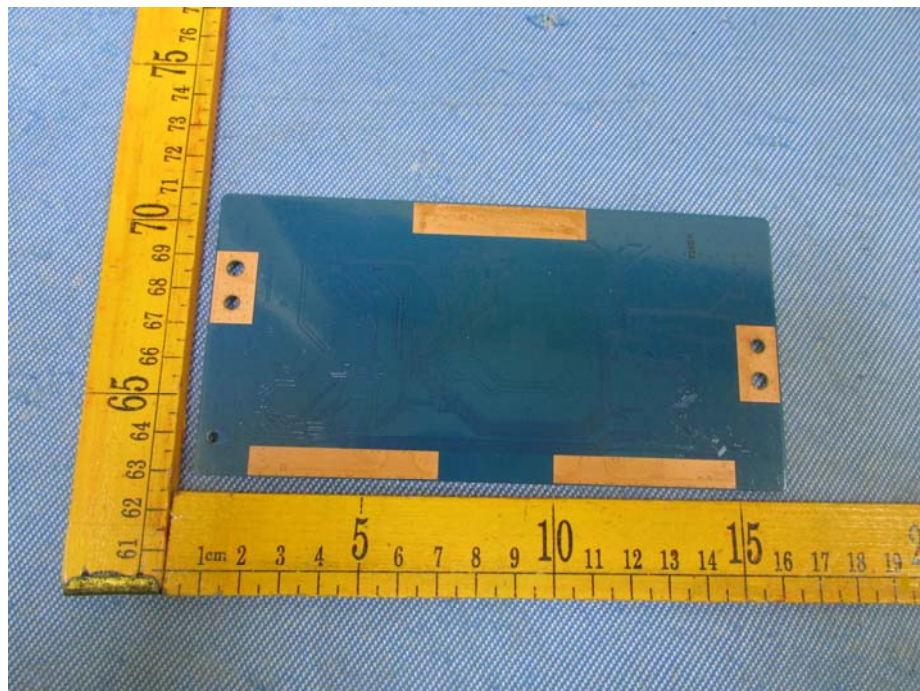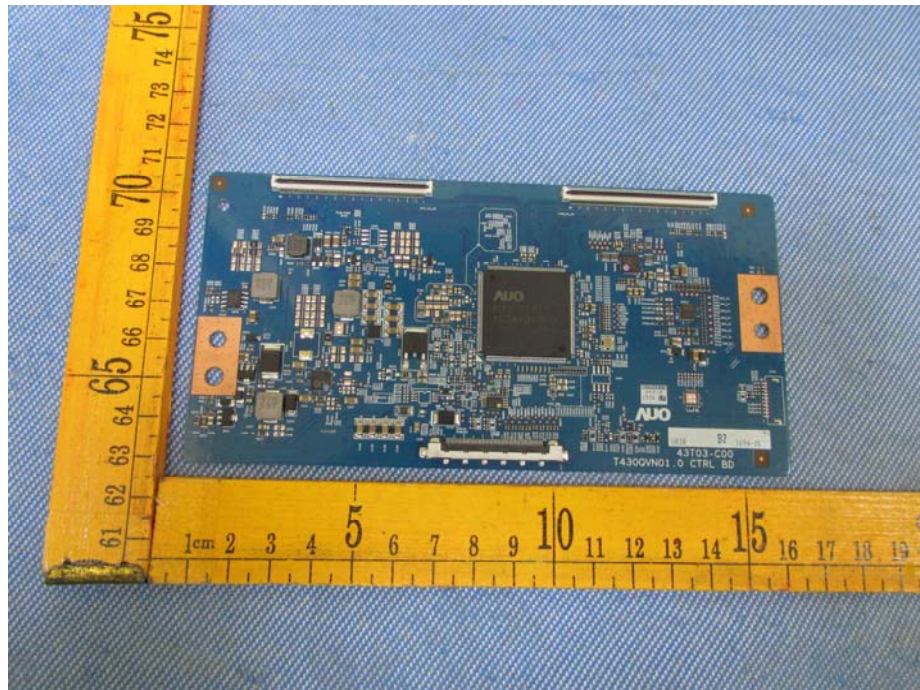

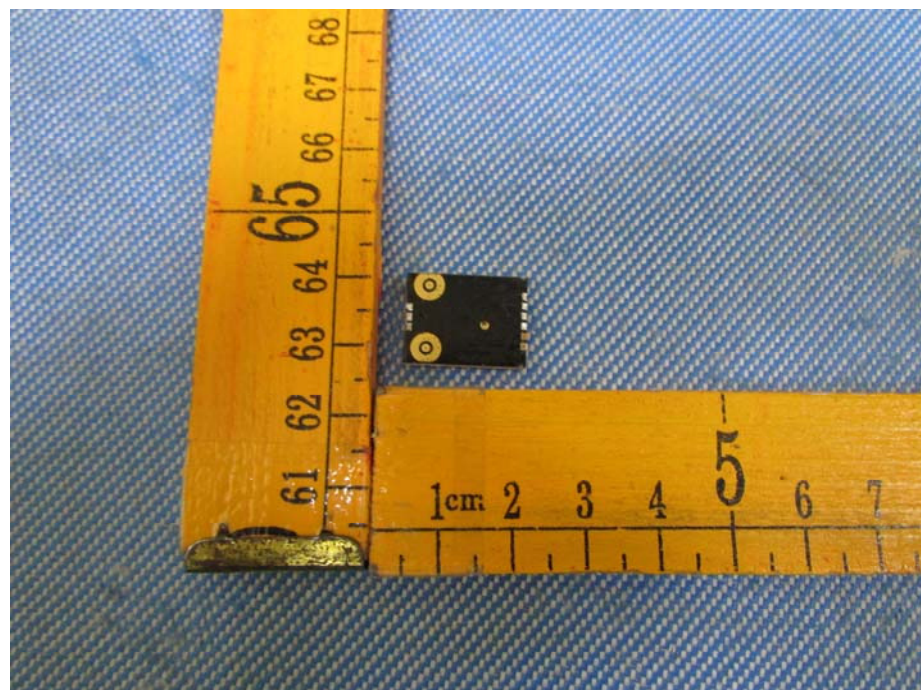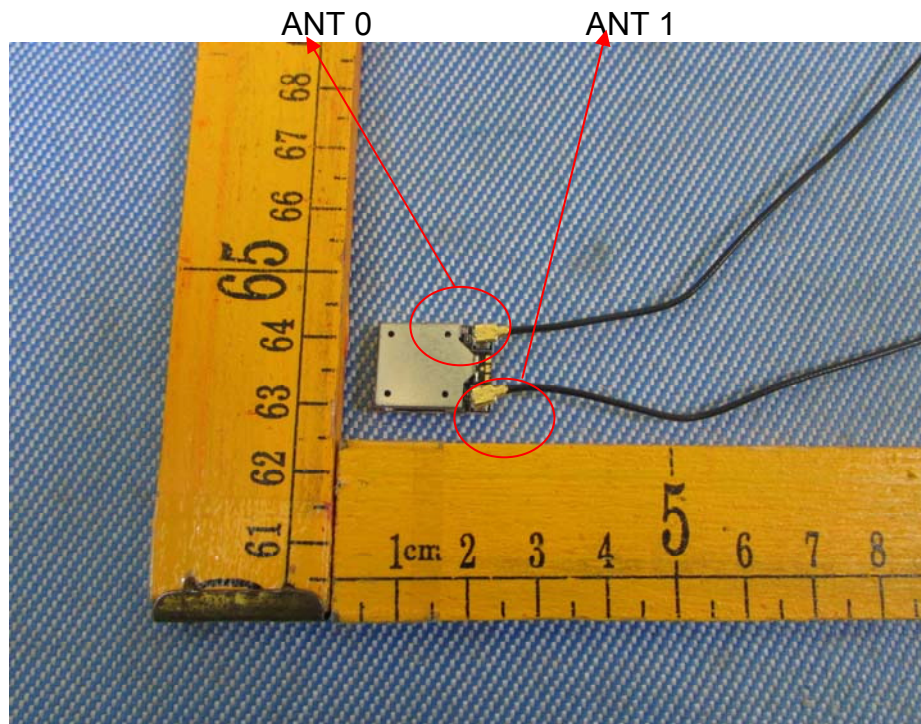

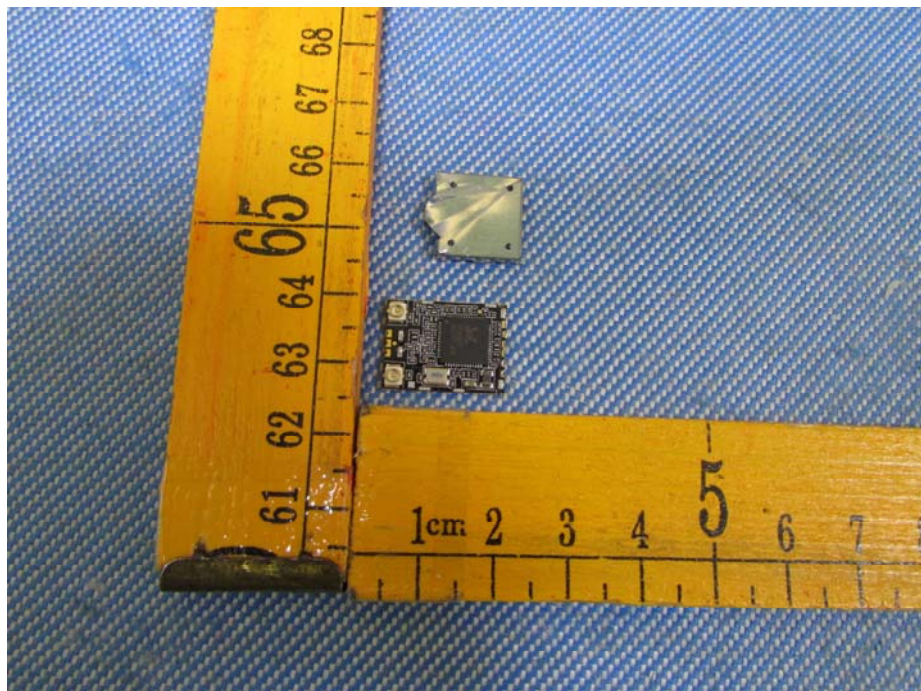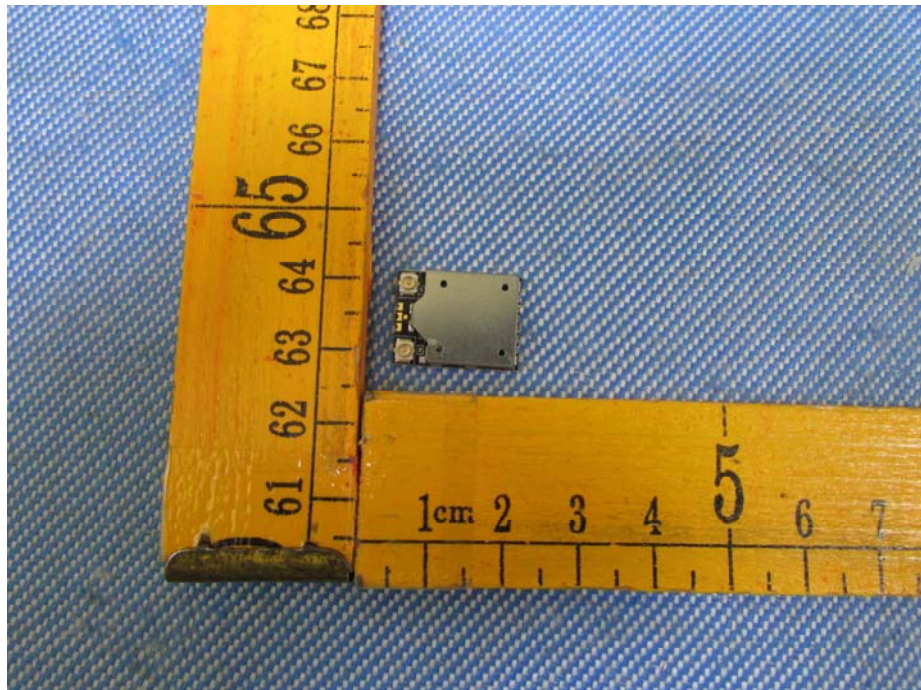

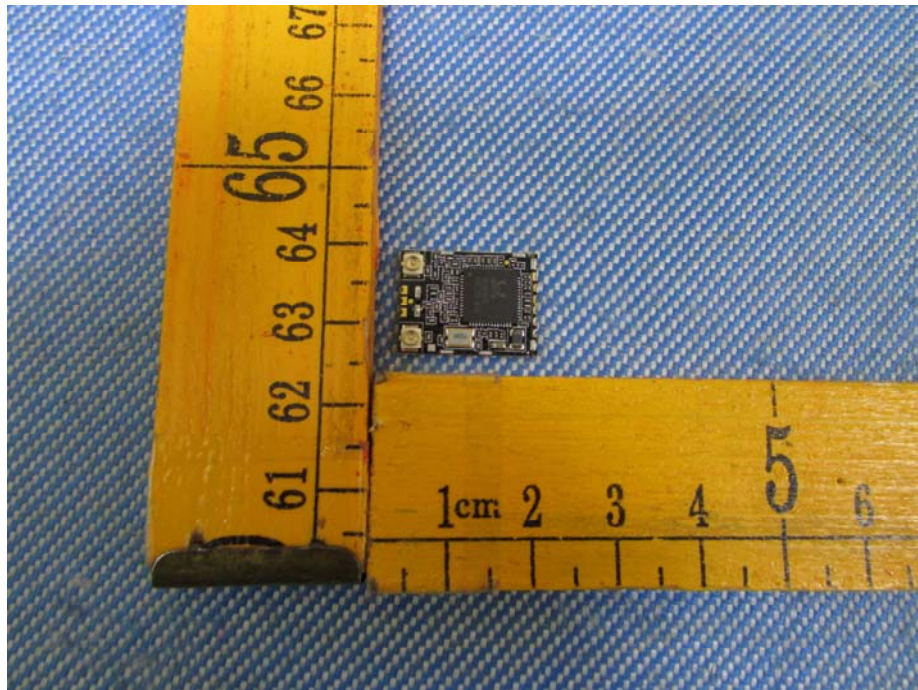

====End of Report====