

# TEST REPORT

Applicant Name: JEM ACCESSORIES INC.  
Address: 32 Brunswick Avenue, Edison, New Jersey, United States, 08817  
Report Number: 2401W92117E-RF-00A  
FCC ID: 2AHAS-EGD11001

## Test Standard (s)

FCC PART 15.247

## Sample Description

Product Type: Smart 2K garage camera  
Model No.: EGD1-1001  
Multiple Model(s) No.: EGD1-1001-WHT, EGD1-1001-BLK  
Trade Mark: N/A  
Date Received: 2024-08-26  
Issue Date: 2025-01-26

Test Result:

Pass▲

▲ In the configuration tested, the EUT complied with the standards above.

## Prepared and Checked By:

Ga La Liu

GaLa Liu  
RF Engineer

## Approved By:

Michelle Zeng

Michelle Zeng  
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

## Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, Futian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

## **TABLE OF CONTENTS**

<b>DOCUMENT REVISION HISTORY .....</b>	<b>3</b>
<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
<b>SUMMARY OF TEST RESULTS .....</b>	<b>9</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>10</b>
<b>REQUIREMENTS AND TEST PROCEDURES .....</b>	<b>11</b>
AC LINE CONDUCTED EMISSIONS.....	11
SPURIOUS EMISSIONS.....	13
6 dB EMISSION BANDWIDTH.....	16
MAXIMUM CONDUCTED OUTPUT POWER .....	17
100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	18
POWER SPECTRAL DENSITY .....	19
DUTY CYCLE .....	21
<b>ANTENNA REQUIREMENT .....</b>	<b>22</b>
<b>TEST DATA AND RESULTS.....</b>	<b>23</b>
AC LINE CONDUCTED EMISSIONS.....	23
SPURIOUS EMISSIONS.....	26
RF CONDUCTED DATA .....	91
<b>RF EXPOSURE EVALUATION .....</b>	<b>92</b>
<b>EUT PHOTOGRAPHS.....</b>	<b>93</b>
<b>TEST SETUP PHOTOGRAPHS .....</b>	<b>94</b>

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401W92117E-RF-00A	Original Report	2025-01-26

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

<b>Product</b>	Smart 2K garage camera
<b>Tested Model</b>	EGD1-1001
<b>Multiple Model(s)</b>	EGD1-1001-WHT, EGD1-1001-BLK
<b>Frequency Range</b>	2412~2462MHz
<b>Maximum Conducted Output Peak Power</b>	23.48 dBm
<b>Modulation Technique</b>	DSSS, OFDM
<b>Antenna Specification<sup>#</sup></b>	3.42dBi (provided by the applicant)
<b>Voltage Range</b>	DC5V from USB port
<b>Sample serial number</b>	2QMR -1 for Conducted and Radiated Emissions Test 2QMR-2 for RF Conducted Test (Assigned by BACL, Shenzhen)
<b>Sample/EUT Status</b>	Good condition
<b>Adapter Information</b>	N/A

Note: The multiple models are electrically identical with the test model except for Model No. and sales channels. Please refer to the declaration letter<sup>#</sup> for more detail, which was provided by manufacturer.

### Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

## Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		109.2kHz(k=2, 95% level of confidence)
RF output power, conducted		0.86dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz~150 kHz	3.63dB(k=2, 95% level of confidence)
	150 kHz ~30MHz	3.66dB(k=2, 95% level of confidence)
Radiated Emissions	0.009MHz~30MHz	3.60dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	5.32dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	5.43dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	5.77dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.73dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.34dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.40dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.64dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

For 2.4GHz Wi-Fi mode, total 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	/	/
6	2437	/	/
7	2442	/	/

802.11b, 802.11g and 802.11n-HT20 mode was tested with Channel 1, 6 and 11.

802.11n-HT40 mode was tested with Channel 3, 6 and 9.

### EUT Exercise Software

Exercise Software <sup>#</sup>		Secure CRT Poratable		
Mode	Data rate	Power Level <sup>#</sup>		
		Low Channel	Middle Channel	High Channel
802.11b	1Mbps	-16	-16	-16
802.11g	6Mbps	-16	-16	-16
802.11n20	MCS0	-16	-16	-16
802.11n40	MCS0	-16	-16	-16

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
YiBin Huafeng CommunicationCo.,Ltd	Adapter	HF-0502000U	Unknown
Bull	Receptacle	Unknown	Unknown
Sandisk	TF CARD	SDSQUNC-032G-ZN3MN	41311661269
JEM ACCESSORIES INC.	SM Door Sensor	Unknown	Unknown
JEM ACCESSORIES INC.	Motor Control	Unknown	Unknown

**External I/O Cable**


Cable Description	Length (m)	From Port	To
Unshielded Un-detachable Cable	1.0	Adapter	EUT
Unshielded Un-detachable AC Cable	1.0	Receptacle	LISN/ AC Mains
Unshielded Un-detachable SM Door Sensor Cable	5	EUT	SM Door Sensor
Unshielded Un-detachable Motor Control Cable	5	EUT	Motor Control

**Block Diagram of Test Setup**


For Conducted Emissions:

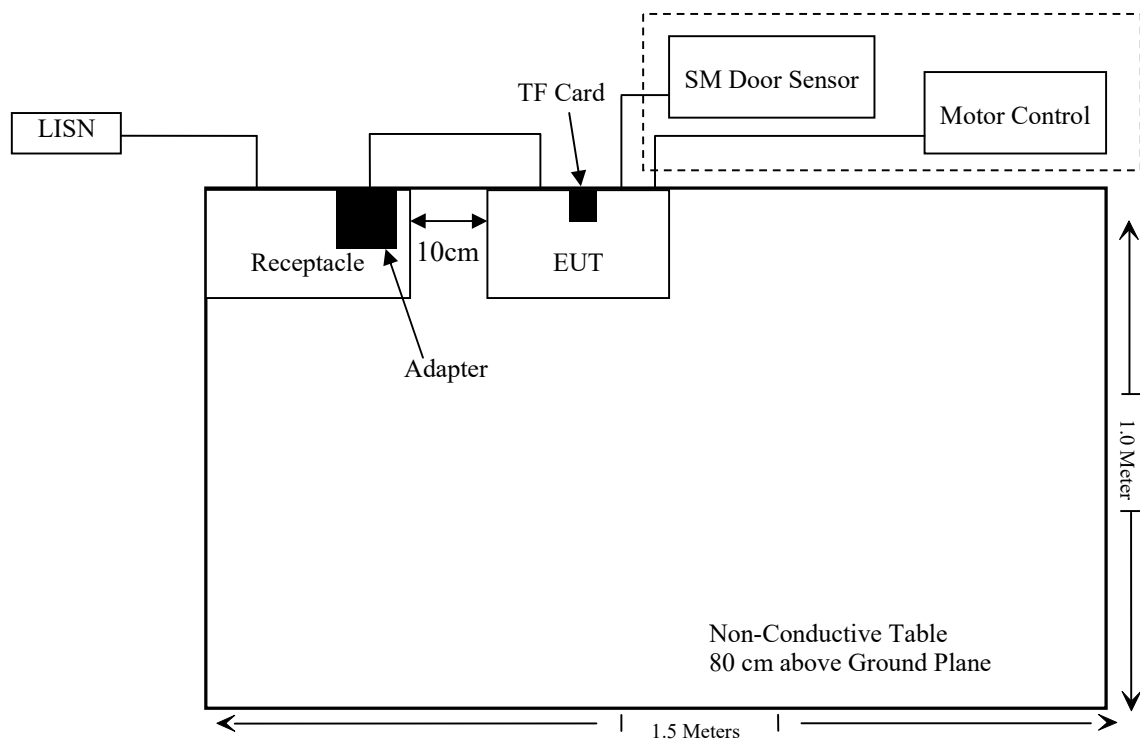

For Radiated Emissions below 1GHz:

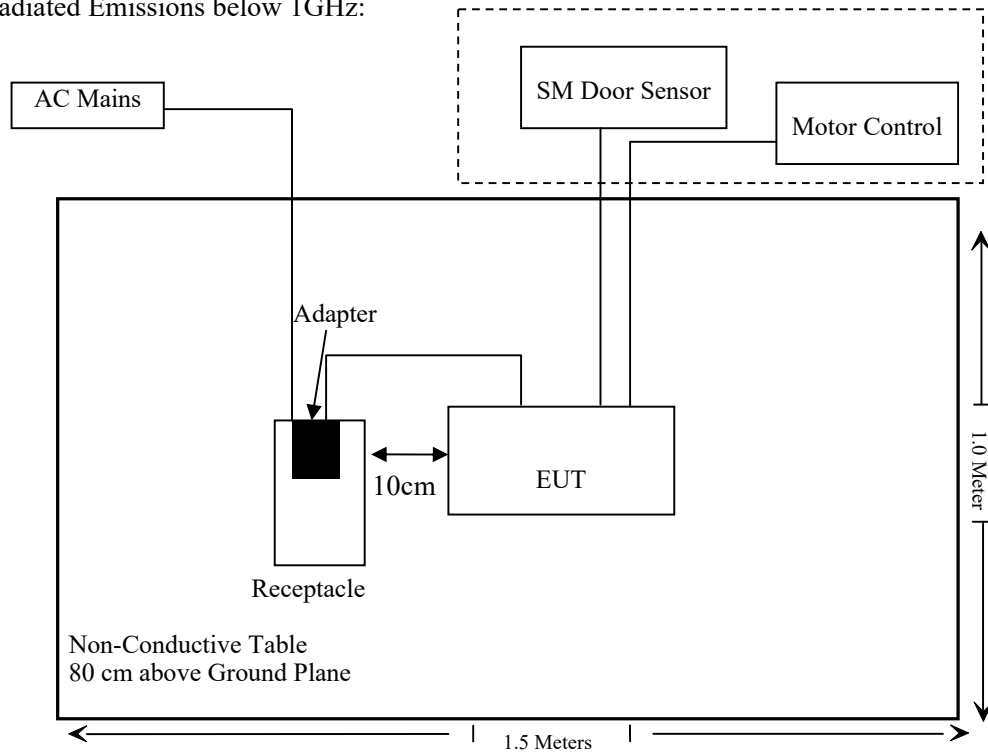

For Radiated Emissions above 1GHz:

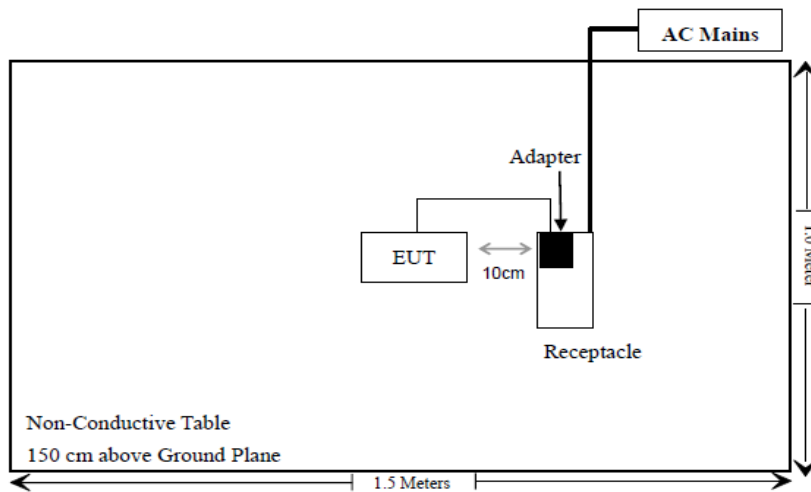



**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant
C63.10 §11.6	Duty Cycle	/
§15.247 (i), §1.1307 (b) & §2.1091	Maximum Permissible Exposure (MPE)	Compliant

**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Conducted Emission Test</b>					
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2024/05/21	2025/05/20
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2024/05/21	2025/05/20
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
<b>Radiated Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	Chamber Cable 1	F-03-EM236	2024/06/18	2025/06/17
Unknown	Cable	XH500C	J-10M-A	2024/06/18	2025/06/17
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde&Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
COM-POWER	Pre-amplifier	PA-122	181919	2024/06/18	2025/06/17
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	0735	2024/06/18	2025/06/17
Unknown	RF Cable	UFA147	219661	2024/06/18	2025/06/17
Unknown	RF Cable	XH750A-N	J-10M	2024/06/18	2025/06/17
A.H.System	Pre-amplifier	PAM-1840VH	190	2024/06/18	2025/06/17
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2024/06/18	2025/06/17
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
<b>RF Conducted Test</b>					
Tonscend	RF control Unit	JS0806-2	19D8060154	2024/08/06	2025/08/05
Rohde & Schwarz	Spectrum Analyzer	FSV40	101473	2024/01/16	2025/01/15
ANRITSU	Microwave peak power sensor	MA24418A	12622	2024/05/21	2025/05/20
Narda	20dB Attenuator	99899	0107	2024/06/27	2025/06/26

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).


## REQUIREMENTS AND TEST PROCEDURES

### AC Line Conducted Emissions

#### Applicable Standard

FCC§15.207

#### EUT Setup

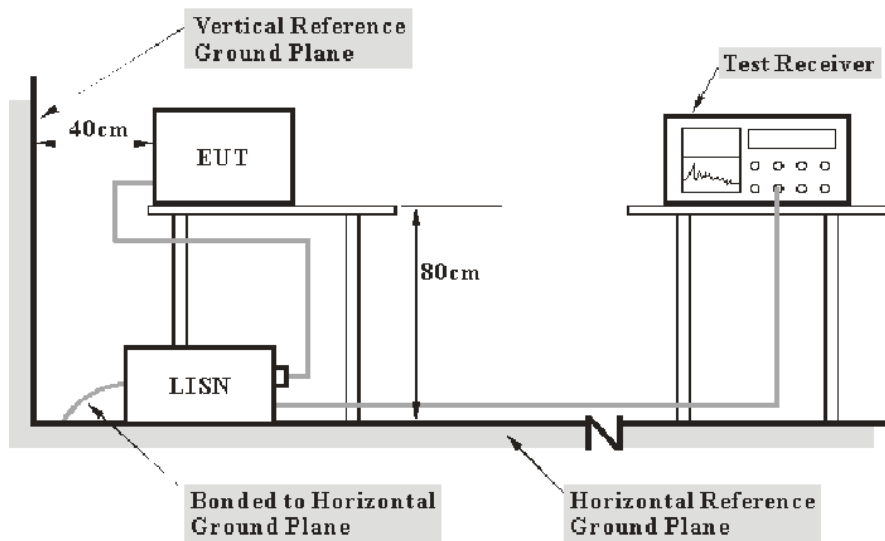

Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

#### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

**Test Procedure**

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

**Factor & Over Limit Calculation**

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{level} - \text{Limit} \\ \text{Level} &= \text{reading level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).


## Spurious Emissions

### Applicable Standard


FCC §15.247 (d); §15.209; §15.205;


### EUT Setup

#### 9 kHz-30MHz:

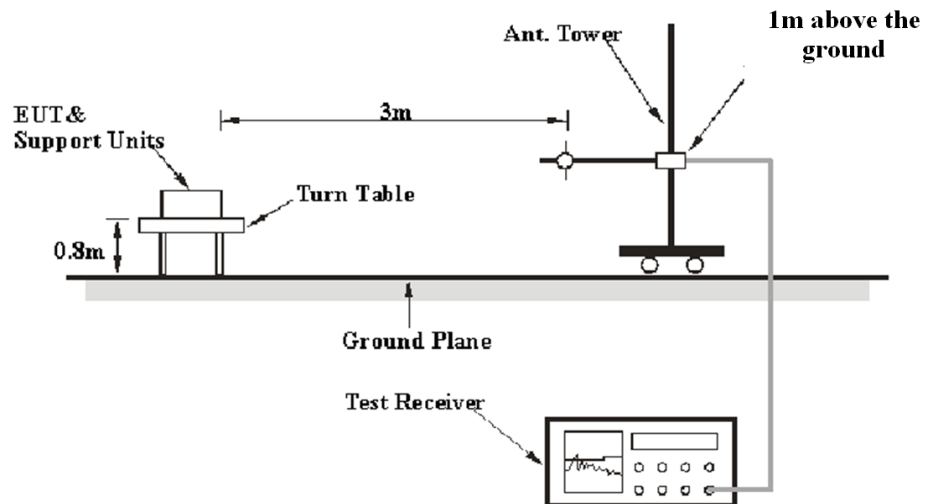

#### 30MHz-1GHz:

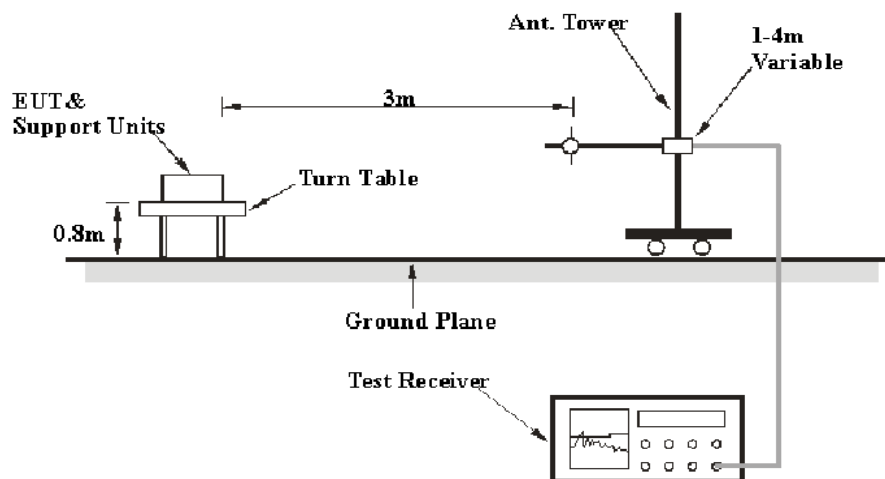

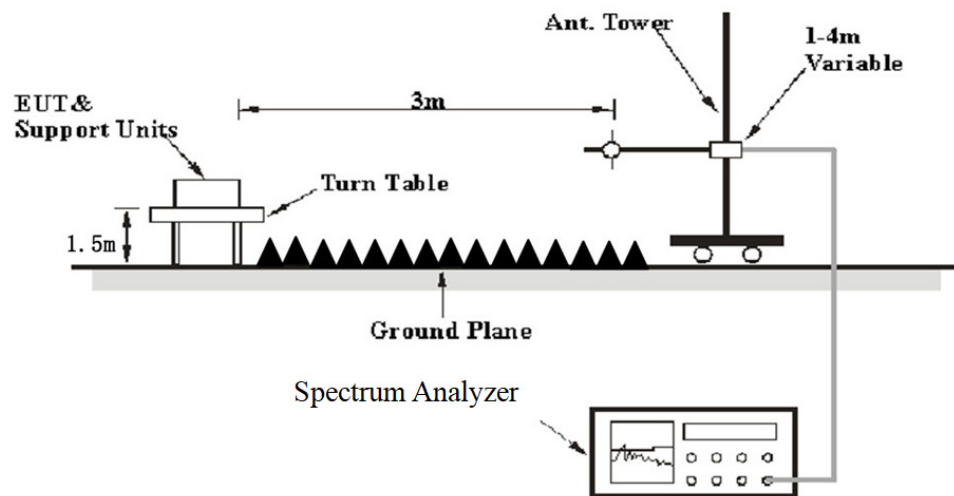**Above 1GHz:**

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247 limits.

**EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200 Hz	QP
	300 Hz	1 kHz	/	PK
150 kHz – 30 MHz	/	/	9 kHz	QP
	10 kHz	30 kHz	/	PK
30 MHz – 1000 MHz	/	/	120 kHz	QP
	100 kHz	300 kHz	/	PK

1-25GHz:

Pre-scan

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	5 kHz
	<98%	1MHz	≥1/Ton, not less than 5 kHz

Final measurement for emission identified during pre-scan

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	≥1/Ton

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

### Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

All emissions under the average limit and under the noise floor have not recorded in the report.

### Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level/Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

## 6 dB Emission Bandwidth

### Applicable Standard


According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.8.1

- a) Set RBW = 100 kHz.
- b) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

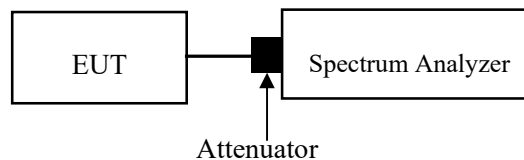



## Maximum Conducted Output Power


### Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### Test Procedure

Test method: ANSI C63.10-2013 clause 11.9.1.3 for peak power method or clause 11.9.2.3.2 for average power method.

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

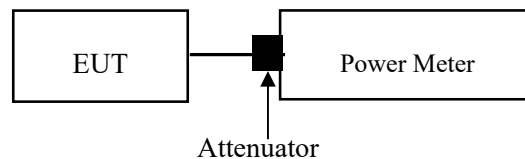

Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss

## 100 kHz Bandwidth of Frequency Band Edge


### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.11

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

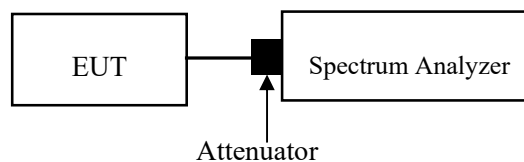

## Power Spectral Density

### Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.10.2

Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.

1. Set the RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
2. Set the VBW  $\geq 3 \times \text{RBW}$ .
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Method: ANSI C63.10-2013 Clause 11.10.3 Method AVGPSD-1


The following procedure may be used when the maximum (average) conducted output power was used to determine compliance to the fundamental output power limit. This is the baseline method for determining the maximum (average) conducted PSD level. If the instrument has a power averaging (rms) detector, then it must be used; otherwise, use the sample detector. The EUT must be configured to transmit continuously ( $D \geq 98\%$ ), or else sweep triggering/signal gating must be implemented to ensure that measurements are made only when the EUT is transmitting at its maximum power control level (no transmitter OFF time to be considered):

1. Set instrument center frequency to DTS channel center frequency.
2. Set span to at least 1.5 times the OBW.
3. Set the RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{BW}$ .
5. Detector = power averaging (rms) or sample detector (when rms not available)
6. Ensure that the number of measurement points in the sweep  $\geq [2 \times \text{span} / \text{RBW}]$ .
7. Sweep time = auto couple.
8. Employ trace averaging (rms) mode over a minimum of 100 traces.
9. Use the peak marker function to determine the maximum amplitude level.
10. If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

## Test Method: ANSI C63.10-2013 Clause 11.10.5 Method AVGPDS-2

The following procedure is applicable when the EUT cannot be configured to transmit continuously (i.e.,  $D < 98\%$ ), when sweep triggering/signal gating cannot be used to measure only when the EUT is transmitting at its maximum power control level, and when the transmission duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2\%$ ):

1. Measure the duty cycle (D) of the transmitter output signal as described in 11.6.
2. Set instrument center frequency to DTS channel center frequency.
3. Set span to at least 1.5 times the OBW.
4. Set the RBW to:  $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
5. Set the VBW  $\geq 3 \times \text{BW}$ .
6. Detector = power averaging (rms) or sample detector (when rms not available)
7. Ensure that the number of measurement points in the sweep  $\geq [2 \times \text{span} / \text{RBW}]$ .
8. Sweep time = auto couple.
9. Do not use sweep triggering; allow sweep to “free run.”
10. Employ trace averaging (rms) mode over a minimum of 100 traces.
11. Use the peak marker function to determine the maximum amplitude level.
12. If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

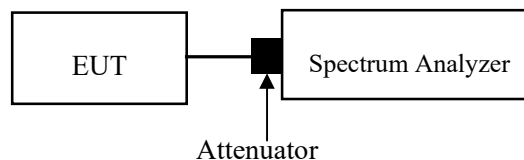

Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was added with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss


## Duty Cycle

### Test Procedure

According to ANSI C63.10-2013 Section 11.6

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set  $RBW \geq OBW$  if possible; otherwise, set RBW to the largest available value.
- 3) Set  $VBW \geq RBW$ . Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if  $T \leq 16.7 \mu s$ .)

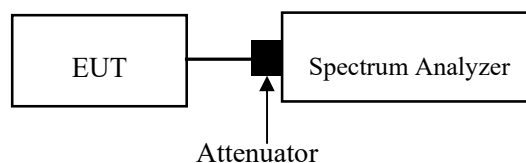

## **ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

### **Antenna Connector Construction**

The EUT has an internal antenna arrangement, which was permanently attached, the antenna gain<sup>#</sup> is 3.42dBi, fulfill the requirement of this section. Please refer to the EUT photos.

**Result: Compliant**


TEST DATA AND RESULTS

AC Line Conducted Emissions

Environmental Conditions

Temperature (°C)	27	Relative Humidity (%)	59
ATM Pressure (kPa)	101	Test engineer	Macy Shi
Test date	2024.09.19		
EUT operation mode	Transmitting(Maximum output power mode, 802.11g, middle Channel)		

## AC 120V 60Hz, Line

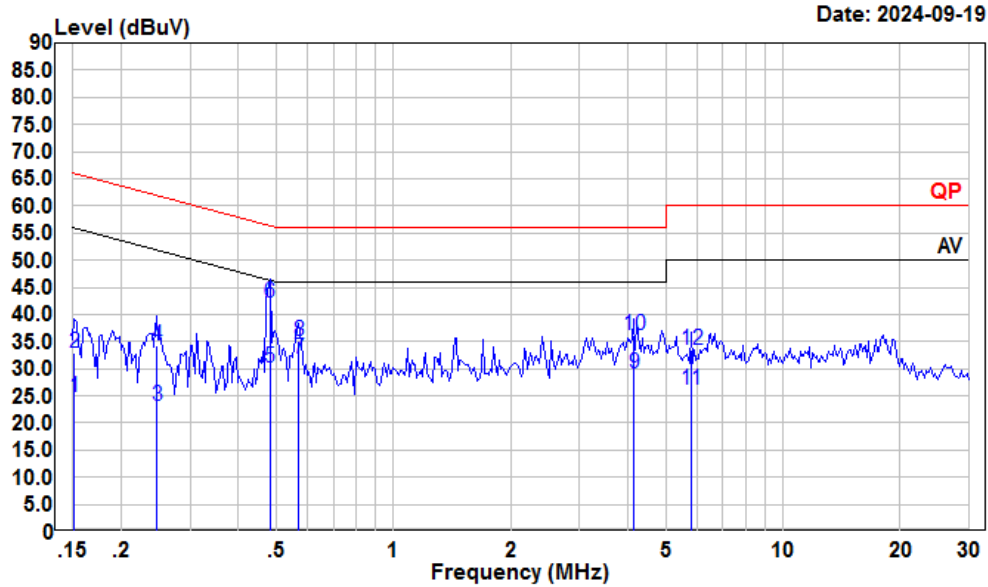

Condition: Line

Project : 2401W92117E-RF


tester : Macy.shi

Note : 2.4G WIFI transmitting

		Read		LISN	Cable	Limit	Over	
	Freq	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.152	3.71	24.74	10.90	10.13	55.91	-31.17	Average
2	0.152	11.97	33.00	10.90	10.13	65.91	-32.91	QP
3	0.247	2.28	23.09	10.73	10.08	51.86	-28.77	Average
4	0.247	13.41	34.22	10.73	10.08	61.86	-27.64	QP
5	0.481	9.50	30.14	10.51	10.13	46.32	-16.18	Average
6	0.481	21.57	42.21	10.51	10.13	56.32	-14.11	QP
7	0.570	11.16	31.79	10.50	10.13	46.00	-14.21	Average
8	0.570	14.54	35.17	10.50	10.13	56.00	-20.83	QP
9	4.136	8.61	29.13	10.31	10.21	46.00	-16.87	Average
10	4.136	15.66	36.18	10.31	10.21	56.00	-19.82	QP
11	5.805	5.49	26.10	10.43	10.18	50.00	-23.90	Average
12	5.805	12.97	33.58	10.43	10.18	60.00	-26.42	QP



## AC 120V 60Hz, Neutral

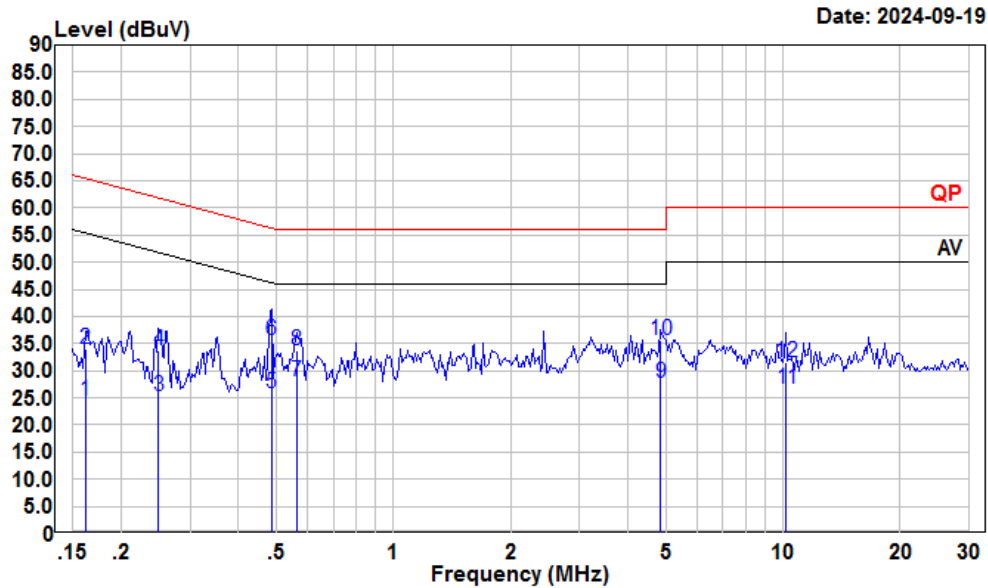

Condition: Neutral

Project : 2401W92117E-RF

tester : Macy.shi

Note : 2.4G WIFI transmitting


		Read		LISN	Cable	Limit	Over	
	Freq	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.162	3.90	24.56	10.55	10.11	55.38	-30.82	Average
2	0.162	13.46	34.12	10.55	10.11	65.38	-31.26	QP
3	0.249	4.63	25.18	10.47	10.08	51.78	-26.60	Average
4	0.249	13.26	33.81	10.47	10.08	61.78	-27.97	QP
5	0.486	5.03	25.85	10.69	10.13	46.23	-20.38	Average
6	0.486	14.91	35.73	10.69	10.13	56.23	-20.50	QP
7	0.564	7.26	28.09	10.70	10.13	46.00	-17.91	Average
8	0.564	12.80	33.63	10.70	10.13	56.00	-22.37	QP
9	4.848	6.94	27.62	10.50	10.18	46.00	-18.38	Average
10	4.848	14.95	35.63	10.50	10.18	56.00	-20.37	QP
11	10.179	5.78	26.79	10.80	10.21	50.00	-23.21	Average
12	10.179	10.64	31.65	10.80	10.21	60.00	-28.35	QP

**Spurious Emissions****Environmental Conditions**

<b>Temperature (°C)</b>	24-25	<b>Relative Humidity (%)</b>	50-54
<b>ATM Pressure (kPa):</b>	101	<b>Test engineer:</b>	Carl Zhu & Zenos Qiao
<b>Test date:</b>	2024.11.16~2024.12.04		
<b>EUT operation mode:</b>	Below 1GHz: Transmitting(Maximum output power mode, 802.11g mode, Middle Channel) Above 1GHz: Transmitting		
<b>Note:</b>	1. After pre-scan in the X, Y and Z axes of orientation, the worst case z-axis of orientation were recorded. 2. For 9 kHz~30 MHz test, Pre-scan in the parallel, perpendicular and ground parallel, just the worst case parallel was recorded in the report		

**Below 1GHz:**


9kHz-150kHz

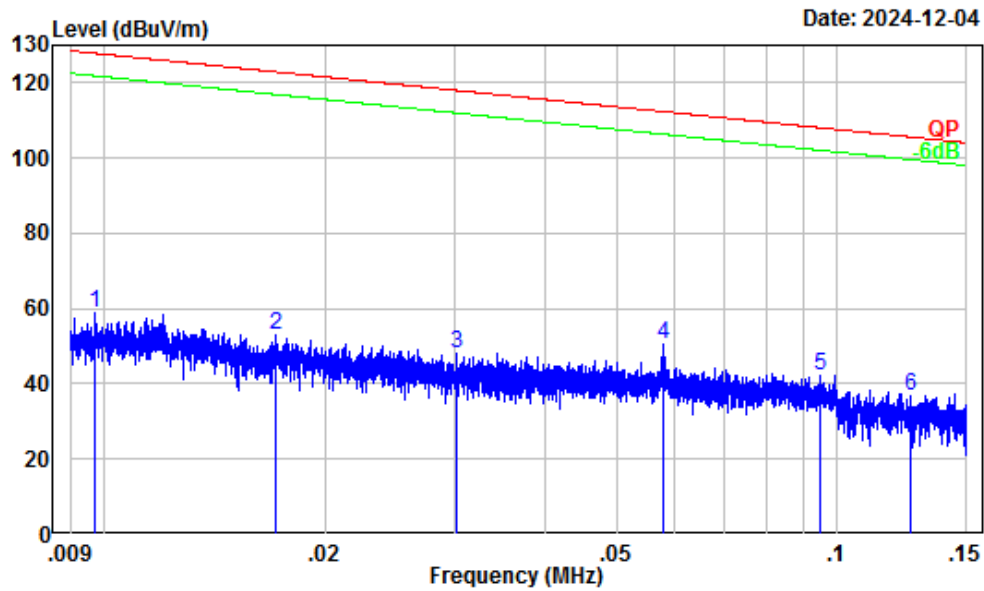

Site : Chamber A  
 Condition : 3m  
 Project Number : 2401W92117E-RF  
 Test Mode : Transmitting  
 Detector Peak RBW: 0.3KHz VBW:1KHz  
 Tester : Carl Zhu

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	32.36	26.36	58.72	127.87	-69.15	Peak
2	0.02	30.94	22.10	53.04	122.92	-69.88	Peak
3	0.03	28.47	19.58	48.05	117.98	-69.93	Peak
4	0.06	25.61	25.13	50.74	112.35	-61.61	Peak
5	0.09	22.37	19.65	42.02	108.08	-66.06	Peak
6	0.13	20.49	16.54	37.03	105.63	-68.60	Peak


## 150kHz-30MHz

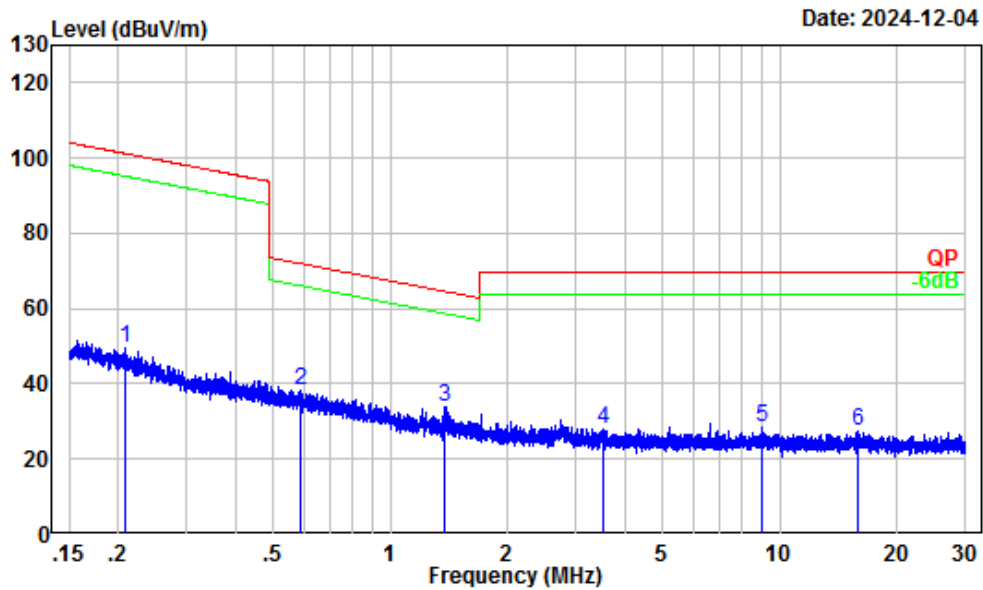

Site : Chamber A  
Condition : 3m  
Project Number : 2401W92117E-RF  
Test Mode : Transmitting  
Detector Peak RBW: 10KHz VBW:30KHz  
Tester : Carl Zhu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.21	15.63	33.70	49.33	101.25	-51.92	Peak
2	0.59	5.29	32.80	38.09	72.15	-34.06	Peak
3	1.39	0.12	33.62	33.74	64.58	-30.84	Peak
4	3.53	-2.44	30.54	28.10	69.54	-41.44	Peak
5	9.00	-2.90	31.17	28.27	69.54	-41.27	Peak
6	15.90	-2.32	29.97	27.65	69.54	-41.89	Peak


## 30MHz-1GHz\_Horizontal

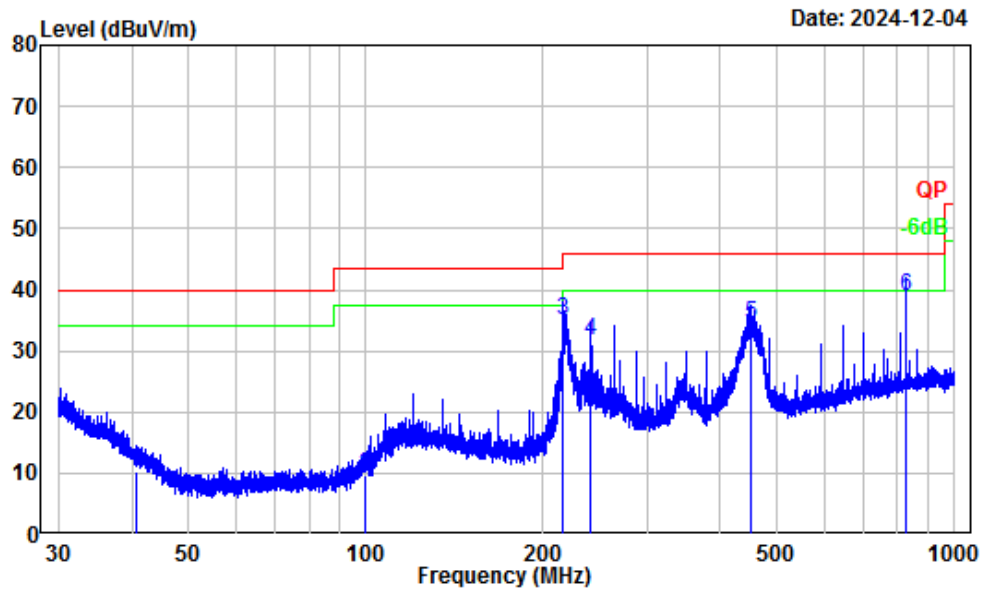

Site : Chamber A  
Condition : 3m Horizontal  
Project Number : 2401W92117E-RF  
Test Mode : Transmitting  
Detector QP RBW: 120KHz  
Tester : Carl Zhu

	Freq		Read		Limit	Over	Remark
	Factor		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.67	-12.84	23.16	10.32	40.00	-29.68	QP
2	100.01	-15.89	25.65	9.76	43.50	-33.74	QP
3	216.02	-14.20	49.11	34.91	46.00	-11.09	QP
4	239.99	-13.32	44.89	31.57	46.00	-14.43	QP
5	451.14	-7.48	41.96	34.48	46.00	-11.52	QP
6	825.32	-1.94	40.76	38.82	46.00	-7.18	QP

30MHz-1GHz\_Vertical

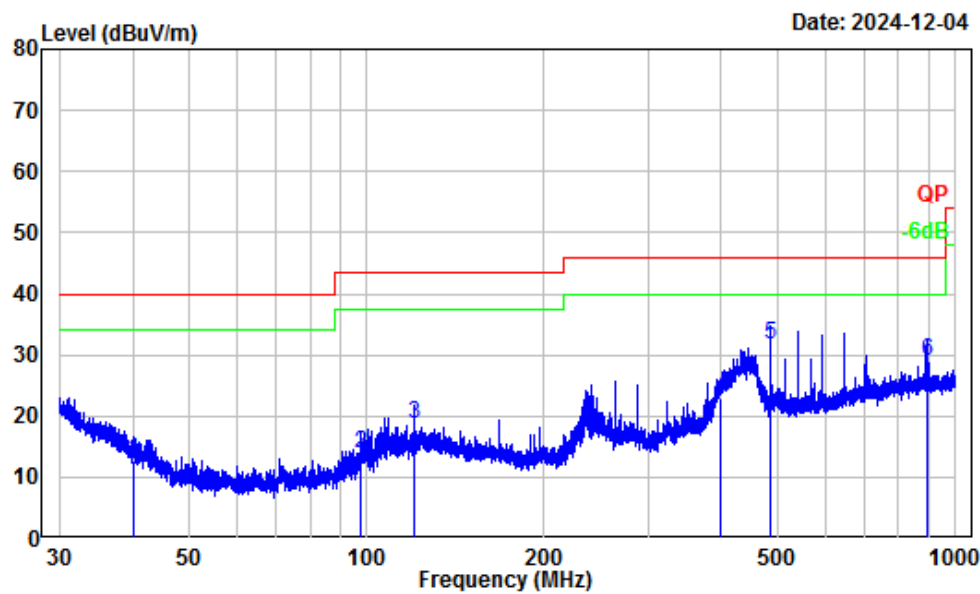

Site : Chamber A  
Condition : 3m Vertical  
Project Number : 2401W92117E-RF  
Test Mode : Transmitting  
Detector QP RBW: 120KHz  
Tester : Carl Zhu

	Freq		Read		Limit	Over	Remark
	MHz	Factor	Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.01	-12.38	24.98	12.60	40.00	-27.40	QP
2	97.84	-16.55	30.51	13.96	43.50	-29.54	QP
3	120.01	-11.45	30.12	18.67	43.50	-24.83	QP
4	399.73	-8.42	31.46	23.04	46.00	-22.96	QP
5	486.04	-6.14	37.85	31.71	46.00	-14.29	QP
6	898.57	-1.31	30.44	29.13	46.00	-16.87	QP

**Above 1GHz:**

Frequency (MHz)	Reading (dBμV)	Detector (PK/AV)	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
<b>802.11b</b>							
Low Channel							
4824	50.37	PK	H	2.45	52.82	74	-21.18
4824	43.25	AV	H	2.45	45.7	54	-8.3
4824	49.73	PK	V	2.45	52.18	74	-21.82
4824	42.84	AV	V	2.45	45.29	54	-8.71
Middle Channel							
4874	50.18	PK	H	2.56	52.74	74	-21.26
4874	43.02	AV	H	2.56	45.58	54	-8.42
4874	49.57	PK	V	2.56	52.13	74	-21.87
4874	42.76	AV	V	2.56	45.32	54	-8.68
High Channel							
4924	50.89	PK	H	2.63	53.52	74	-20.48
4924	43.64	AV	H	2.63	46.27	54	-7.73
4924	50.31	PK	V	2.63	52.94	74	-21.06
4924	43.25	AV	V	2.63	45.88	54	-8.12
<b>802.11g</b>							
Low Channel							
4824	46.64	PK	H	2.45	49.09	74	-24.91
4824	33.52	AV	H	2.45	35.97	54	-18.03
4824	46.4	PK	V	2.45	48.85	74	-25.15
4824	33.35	AV	V	2.45	35.8	54	-18.2
Middle Channel							
4874	46.78	PK	H	2.56	49.34	74	-24.66
4874	33.65	AV	H	2.56	36.21	54	-17.79
4874	46.51	PK	V	2.56	49.07	74	-24.93
4874	33.46	AV	V	2.56	36.02	54	-17.98
High Channel							
4924	47.29	PK	H	2.63	49.92	74	-24.08
4924	34.3	AV	H	2.63	36.93	54	-17.07
4924	46.91	PK	V	2.63	49.54	74	-24.46
4924	34.04	AV	V	2.63	36.67	54	-17.33

Frequency (MHz)	Reading (dBμV)	Detector (PK/AV)	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
<b>802.11n20</b>							
Low Channel							
4824	46.79	PK	H	2.45	49.24	74	-24.76
4824	33.46	AV	H	2.45	35.91	54	-18.09
4824	46.55	PK	V	2.45	49	74	-25
4824	33.37	AV	V	2.45	35.82	54	-18.18
Middle Channel							
4874	47.03	PK	H	2.56	49.59	74	-24.41
4874	33.72	AV	H	2.56	36.28	54	-17.72
4874	46.84	PK	V	2.56	49.4	74	-24.6
4874	33.56	AV	V	2.56	36.12	54	-17.88
High Channel							
4924	47.52	PK	H	2.63	50.15	74	-23.85
4924	34.34	AV	H	2.63	36.97	54	-17.03
4924	47.27	PK	V	2.63	49.9	74	-24.1
4924	34.15	AV	V	2.63	36.78	54	-17.22
<b>802.11n40</b>							
Low Channel							
4844	46.95	PK	H	2.45	49.4	74	-24.6
4844	33.06	AV	H	2.45	35.51	54	-18.49
4844	46.67	PK	V	2.45	49.12	74	-24.88
4844	32.89	AV	V	2.45	35.34	54	-18.66
Middle Channel							
4874	46.8	PK	H	2.56	49.36	74	-24.64
4874	32.94	AV	H	2.56	35.5	54	-18.5
4874	46.53	PK	V	2.56	49.09	74	-24.91
4874	32.76	AV	V	2.56	35.32	54	-18.68
High Channel							
4904	46.98	PK	H	2.64	49.62	74	-24.38
4904	33.19	AV	H	2.64	35.83	54	-18.17
4904	46.71	PK	V	2.64	49.35	74	-24.65
4904	33.02	AV	V	2.64	35.66	54	-18.34

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude/Level = Corrected Factor + Reading


Margin = Corrected Amplitude/Level - Limit

The other spurious emission which is in the noise floor level was not recorded.



**Test plots**


Left Band edge\_Horizontal\_Peak\_802.11b

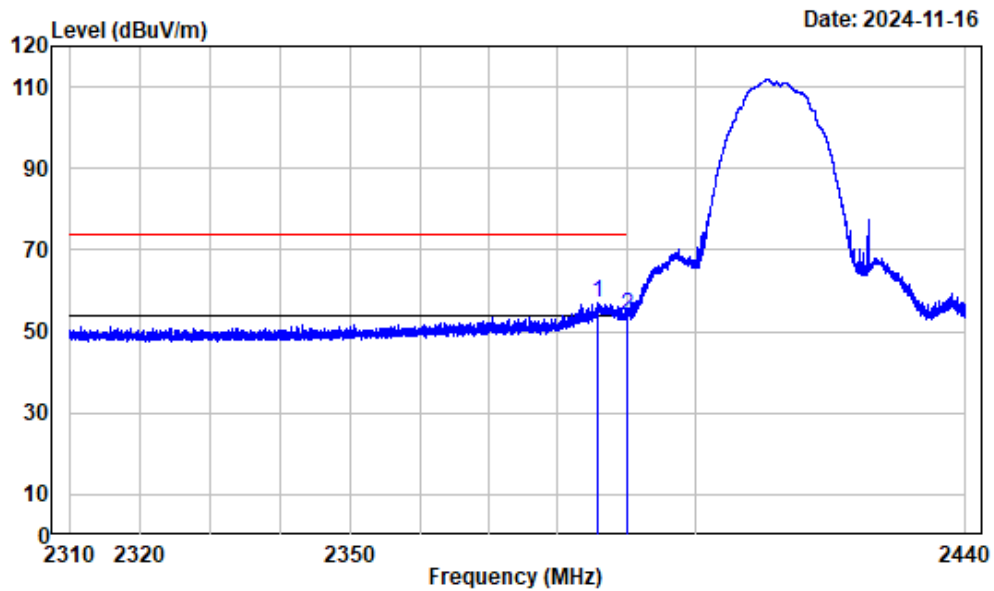

Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-b-2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2385.783	-3.19	60.03	56.84	74.00	-17.16	Peak
2	2390.000	-3.20	57.24	54.04	74.00	-19.96	Peak

Left Band edge\_Horizontal\_Average\_802.11b

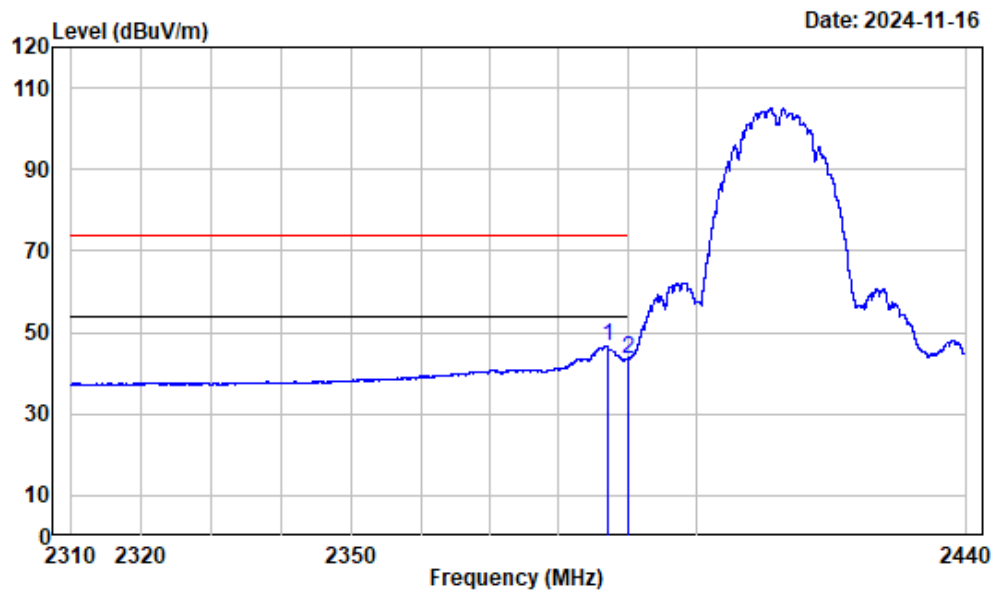


Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-b-2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2387.067	-3.19	49.86	46.67	54.00	-7.33	Average
2	2390.000	-3.20	46.82	43.62	54.00	-10.38	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz


Left Band edge\_Vertical\_Peak\_802.11b

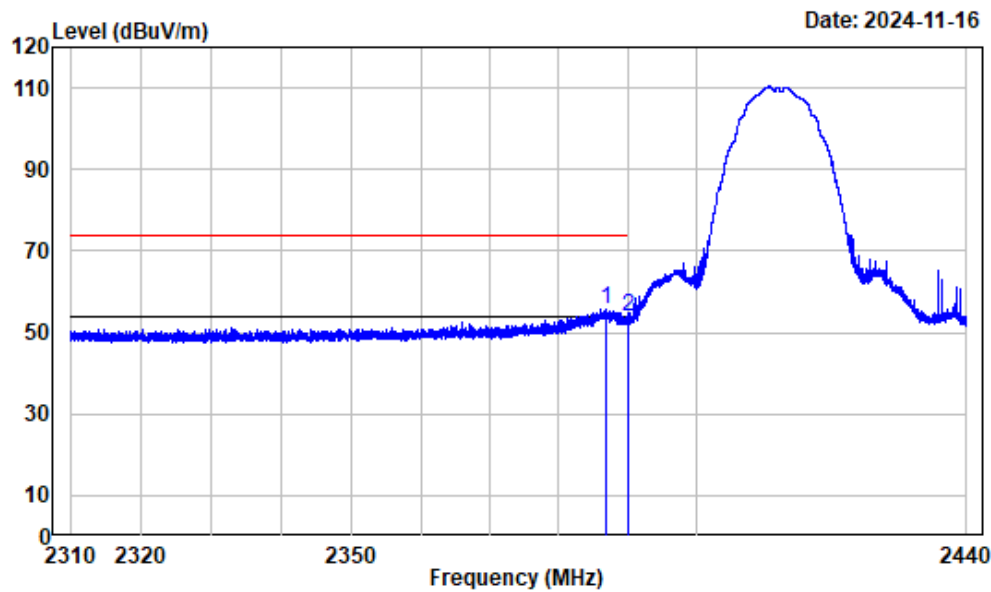

Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-b-2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2386.775	-3.19	59.06	55.87	74.00	-18.13	Peak
2	2390.000	-3.20	56.91	53.71	74.00	-20.29	Peak

Left Band edge\_Vertical\_Average\_802.11b

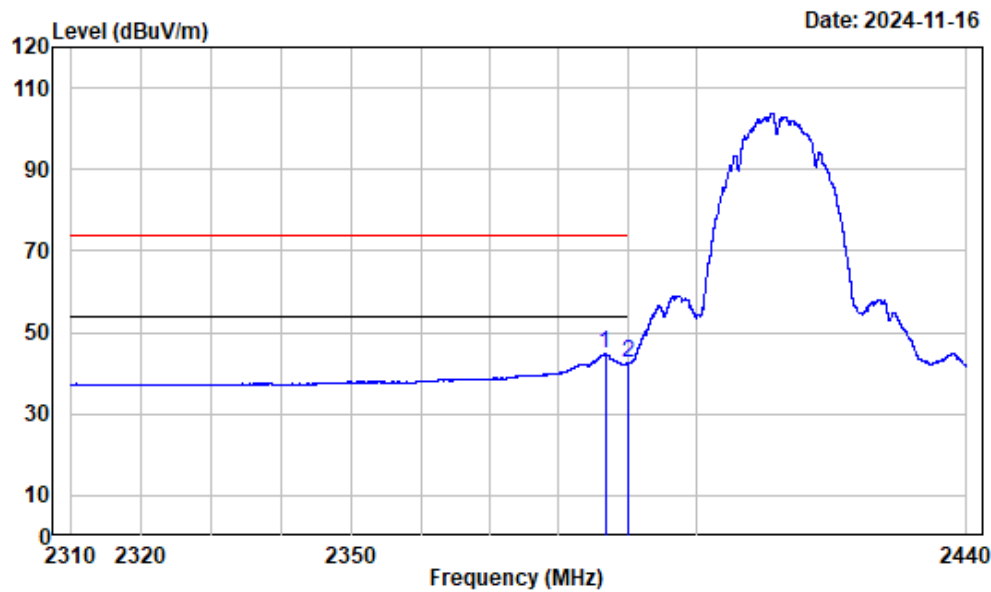


Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-b-2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2386.726	-3.19	47.99	44.80	54.00	-9.20	Average
2	2390.000	-3.20	45.61	42.41	54.00	-11.59	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz


Right Band edge\_Horizontal\_Peak\_802.11b

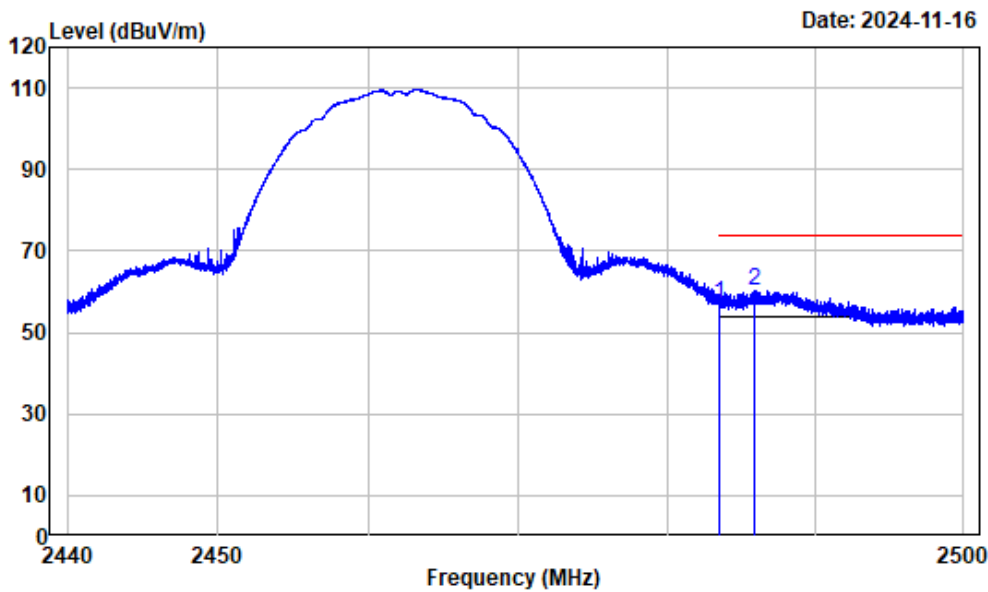

Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-b-2462

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-3.17	60.10	56.93	74.00	-17.07	Peak
2	2485.926	-3.17	63.51	60.34	74.00	-13.66	Peak

Right Band edge\_Horizontal\_Average\_802.11b

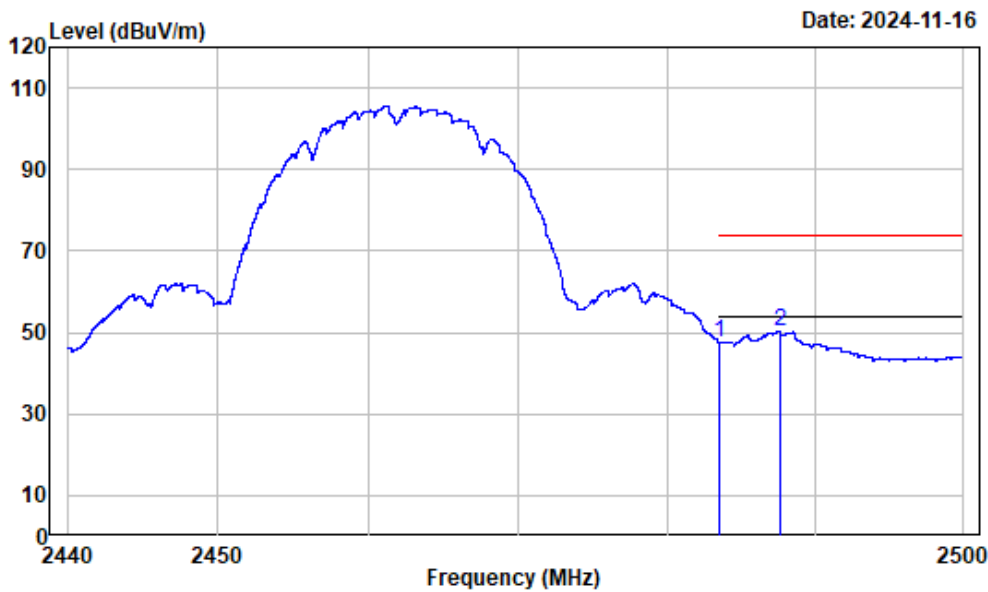


Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-b-2462

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-3.17	50.65	47.48	54.00	-6.52	Average
2	2487.563	-3.18	53.49	50.31	54.00	-3.69	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz


Right Band edge\_Vertical\_Peak\_802.11b

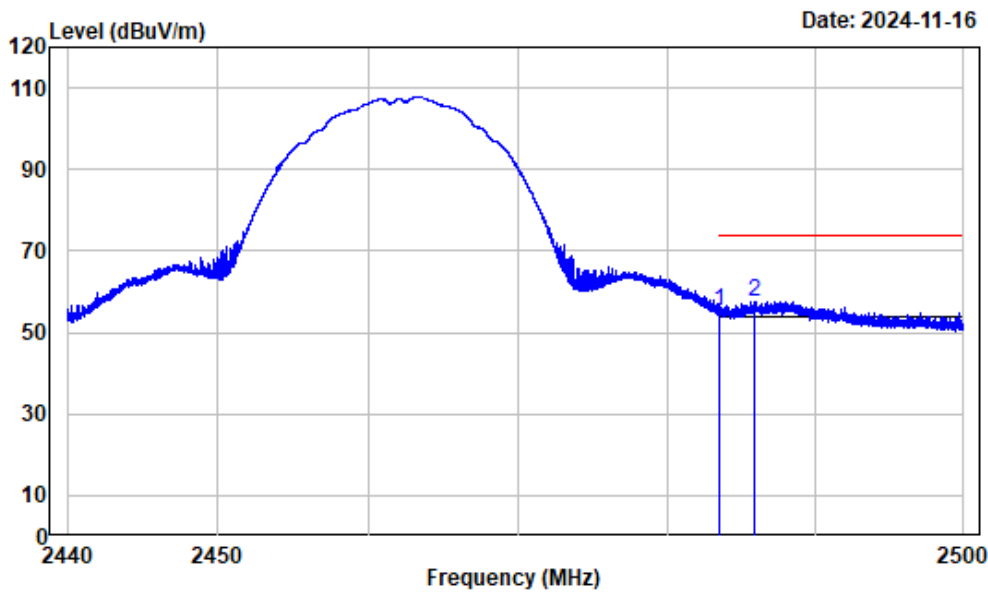

Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-b-2462

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-3.17	58.60	55.43	74.00	-18.57	Peak
2	2485.921	-3.17	60.83	57.66	74.00	-16.34	Peak

Right Band edge\_Vertical\_Average\_802.11b

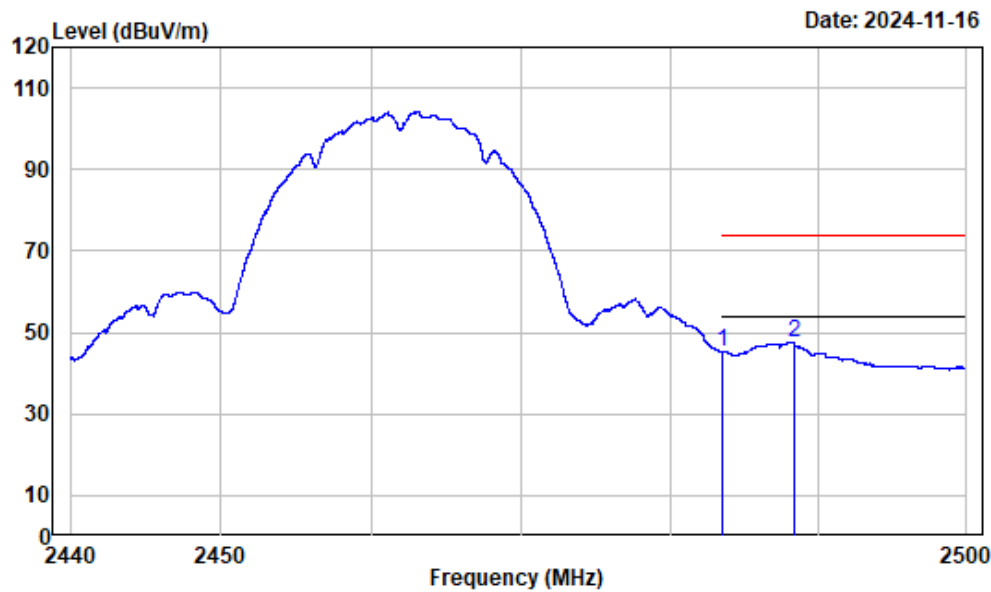


Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-b-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-3.17	48.63	45.46	54.00	-8.54	Average
2	2488.374	-3.18	50.87	47.69	54.00	-6.31	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz




Left Band edge\_Horizontal\_Peak\_802.11g

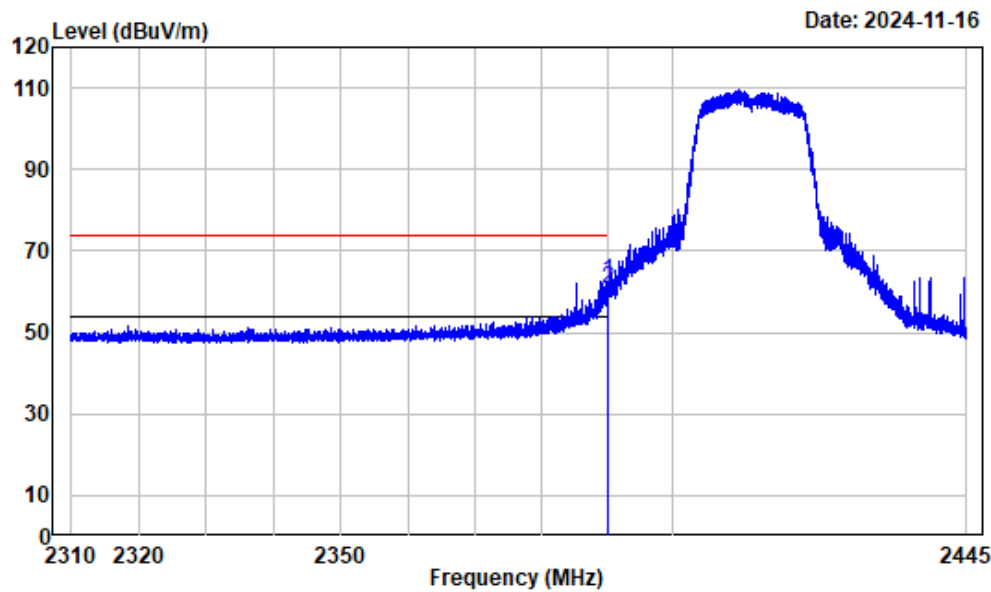

Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-g-2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.947	-3.20	65.82	62.62	74.00	-11.38	Peak
2	2390.000	-3.20	63.85	60.65	74.00	-13.35	Peak

Left Band edge\_Horizontal\_Average\_802.11g

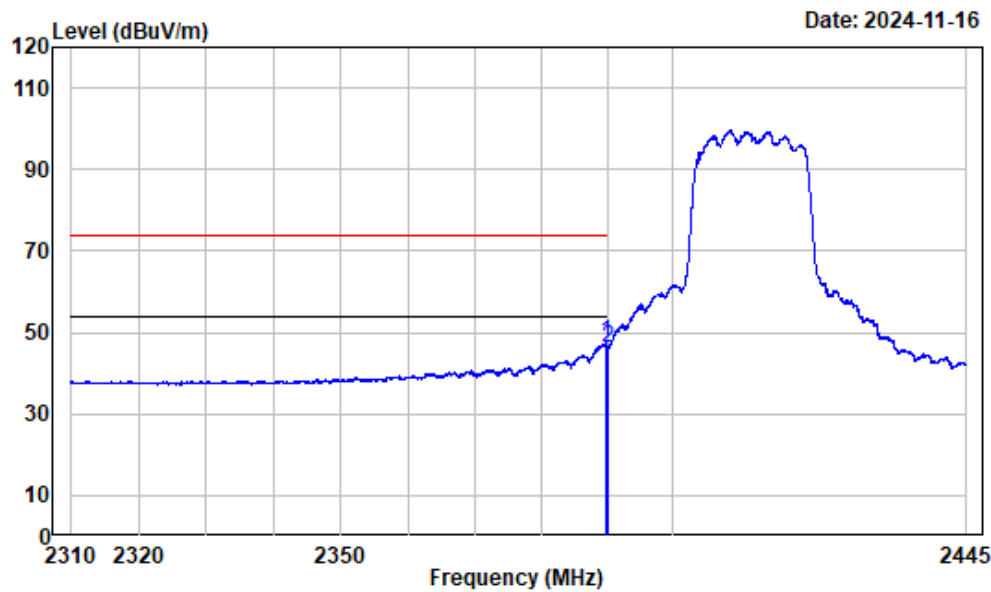


Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-g-2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.761	-3.20	50.74	47.54	54.00	-6.46	Average
2	2390.000	-3.20	49.28	46.08	54.00	-7.92	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz


Left Band edge\_Vertical\_Peak\_802.11g

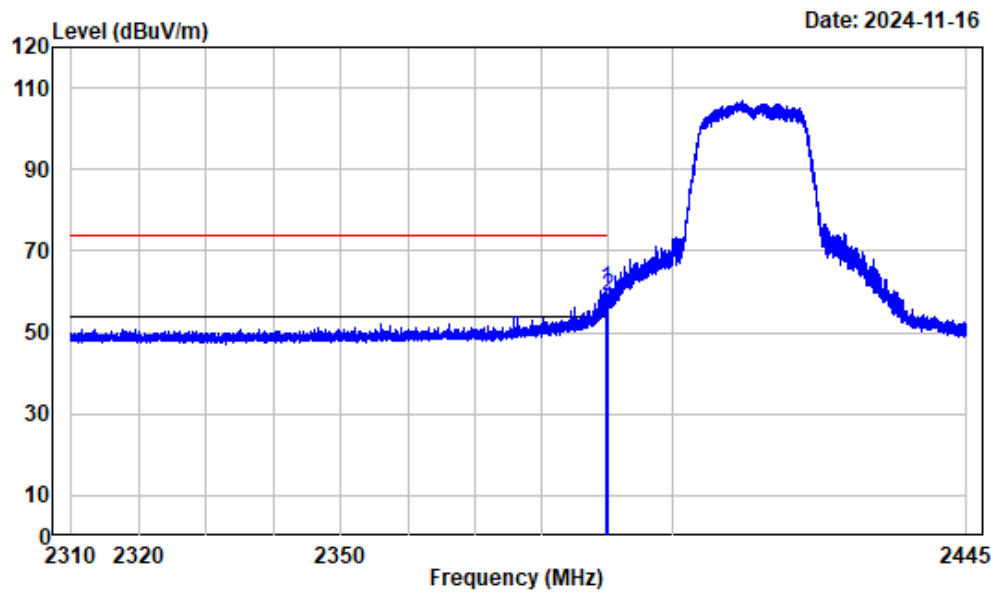

Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-g-2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.778	-3.20	63.95	60.75	74.00	-13.25	Peak
2	2390.000	-3.20	62.20	59.00	74.00	-15.00	Peak

Left Band edge\_Vertical\_Average\_802.11g

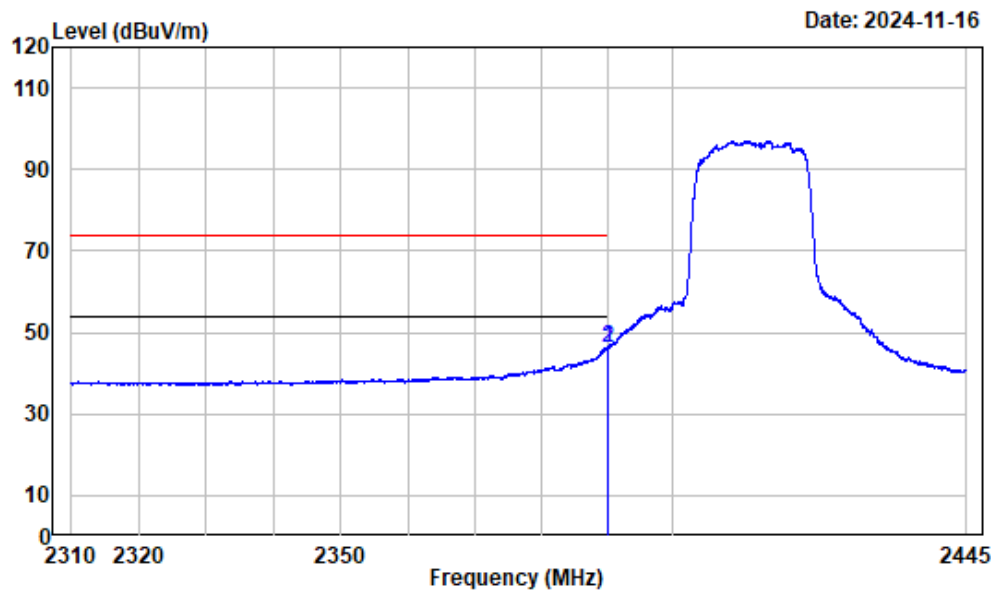


Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-g-2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.998	-3.20	49.26	46.06	54.00	-7.94	Average
2	2390.000	-3.20	49.51	46.31	54.00	-7.69	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz


Right Band edge\_Horizontal\_Peak\_802.11g

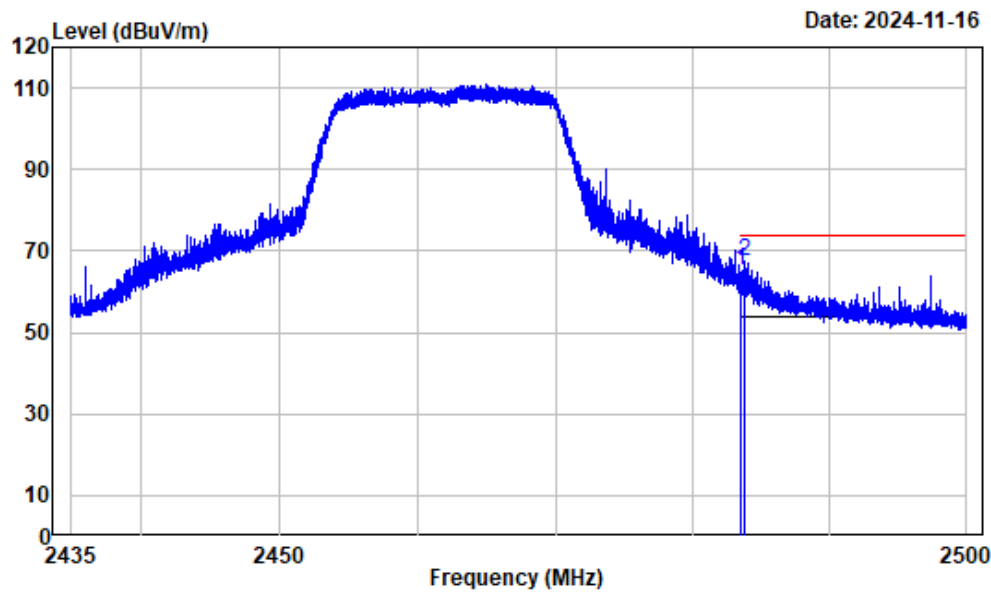

Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-g-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-3.17	68.19	65.02	74.00	-8.98	Peak
2	2483.691	-3.17	70.59	67.42	74.00	-6.58	Peak

Right Band edge\_Horizontal\_Average\_802.11g

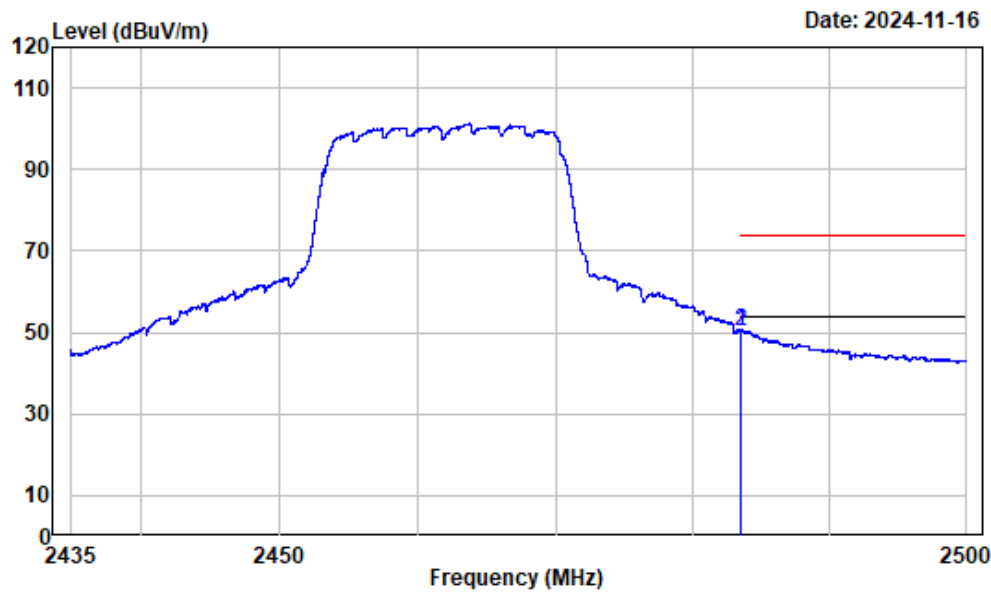


Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-g-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-3.17	53.35	50.18	54.00	-3.82	Average
2	2483.504	-3.17	53.62	50.45	54.00	-3.55	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz


Right Band edge\_Vertical\_Peak\_802.11g

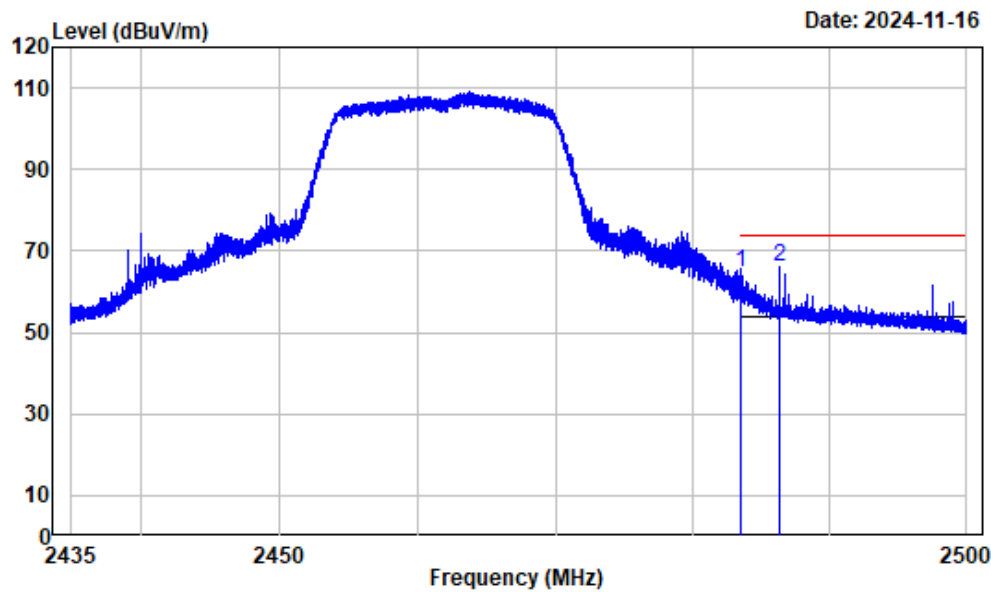

Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-g-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-3.17	67.86	64.69	74.00	-9.31	Peak
2	2486.356	-3.17	69.19	66.02	74.00	-7.98	Peak

Right Band edge\_Vertical\_Average\_802.11g

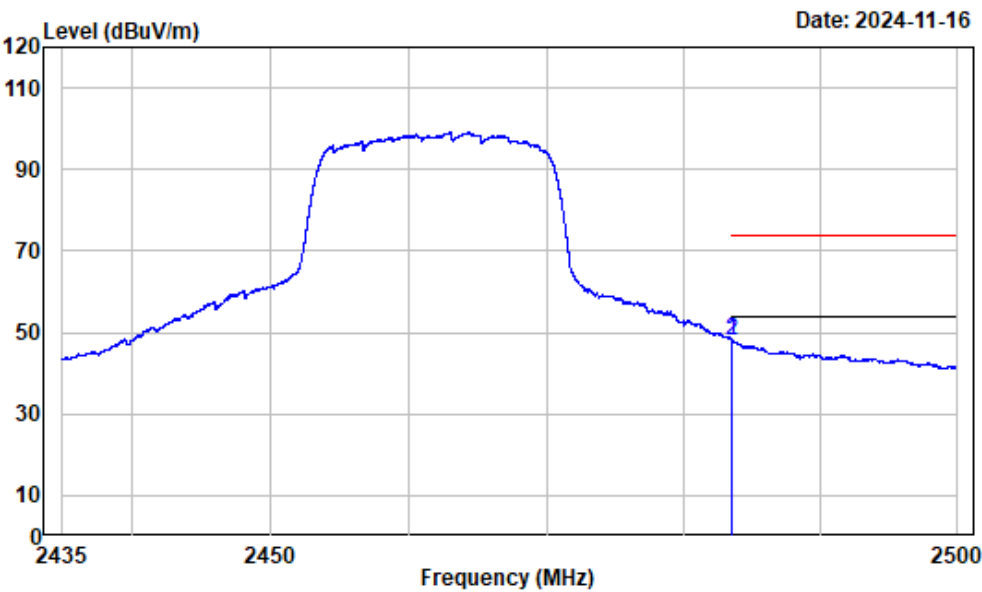


Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-g-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-3.17	51.05	47.88	54.00	-6.12	Average
2	2483.504	-3.17	51.32	48.15	54.00	-5.85	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz




Left Band edge\_Horizontal\_Peak\_802.11n20

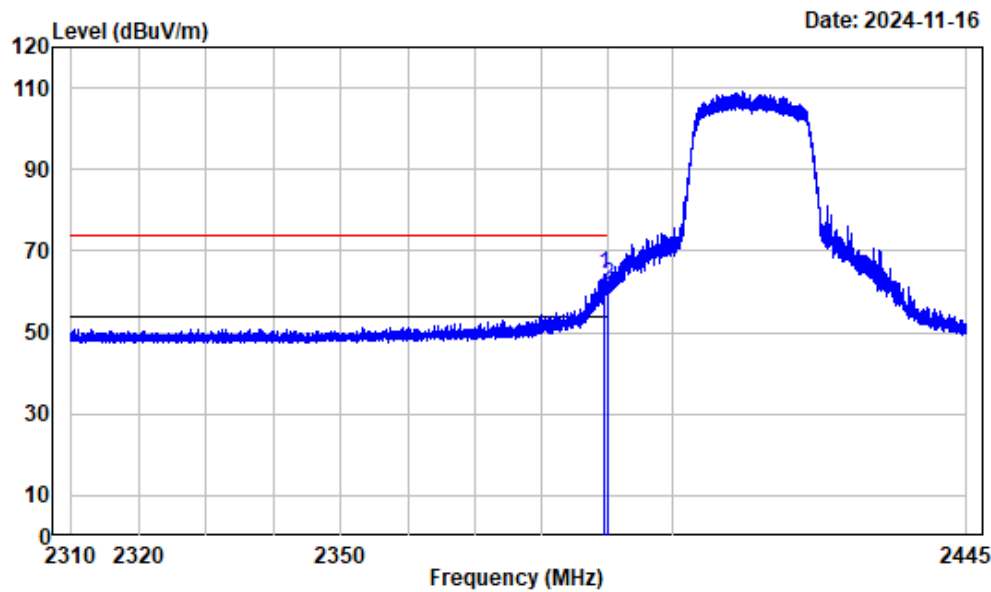

Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n20-2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.424	-3.20	67.62	64.42	74.00	-9.58	Peak
2	2390.000	-3.20	64.70	61.50	74.00	-12.50	Peak

Left Band edge\_Horizontal\_Average\_802.11n20

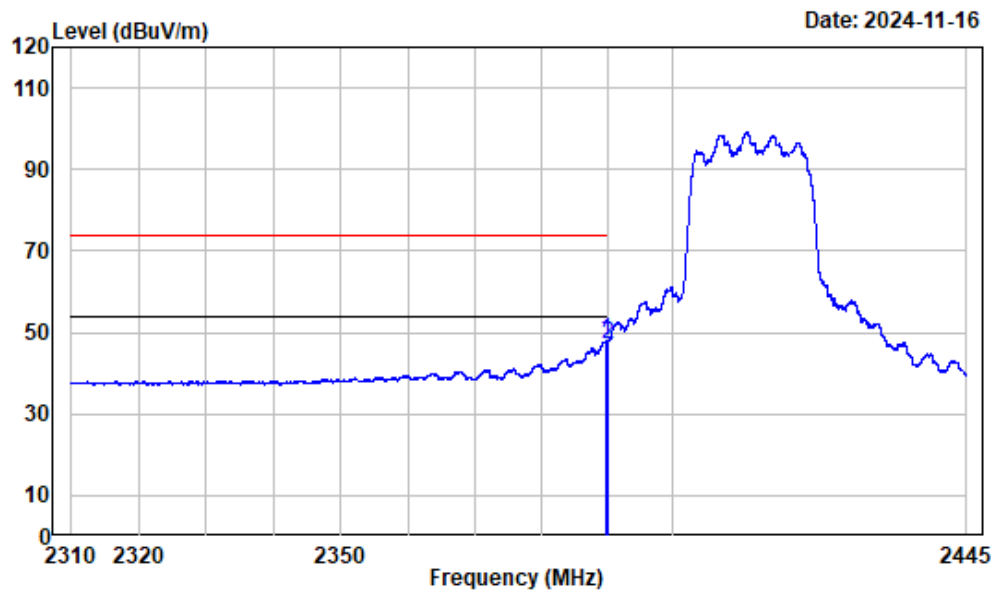


Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n20-2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.711	-3.20	51.10	47.90	54.00	-6.10	Average
2	2390.000	-3.20	50.48	47.28	54.00	-6.72	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz


Left Band edge\_Vertical\_Peak\_802.11n20

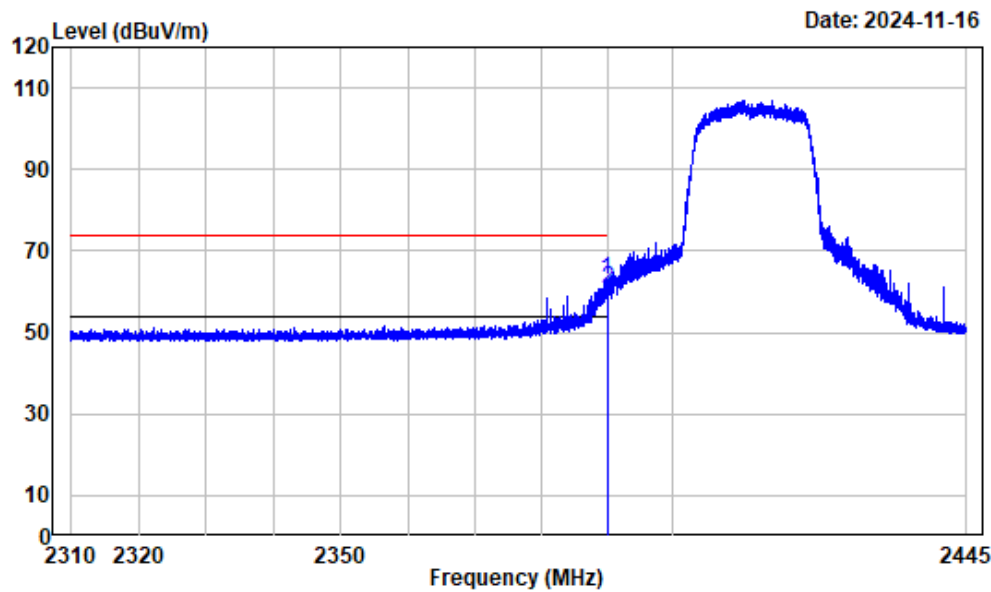

Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n20-2412

		Read		Limit	Over	Remark
Freq		Factor	Level	Level	Line	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	2389.930	-3.20	66.34	63.14	74.00	-10.86 Peak
2	2390.000	-3.20	63.92	60.72	74.00	-13.28 Peak

Left Band edge\_Vertical\_Average\_802.11n20

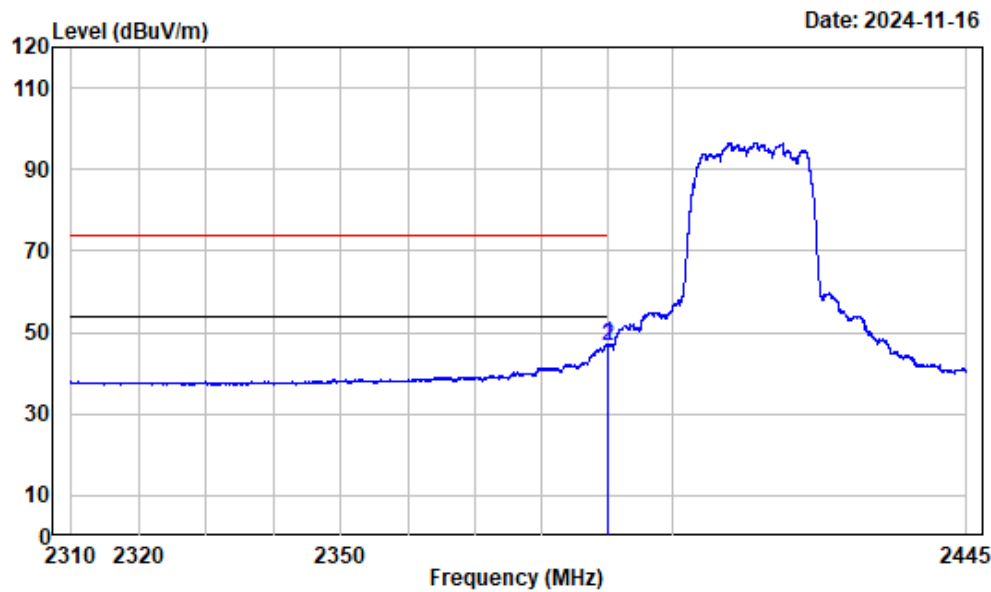


Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n20-2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.981	-3.20	50.14	46.94	54.00	-7.06	Average
2	2390.000	-3.20	50.00	46.80	54.00	-7.20	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz


Right Band edge\_Horizontal\_Peak\_802.11n20

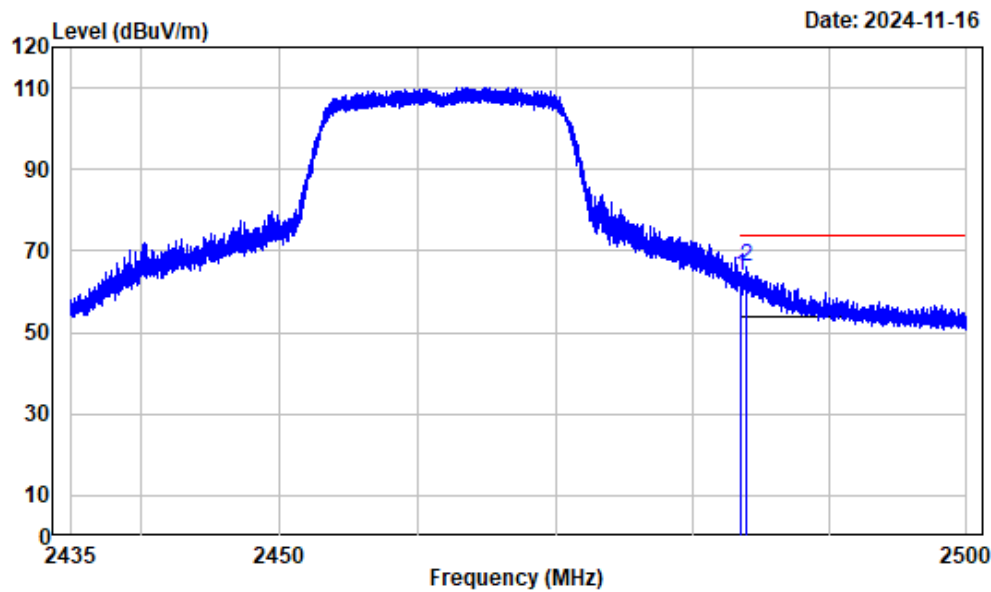

Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n20-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-3.17	67.13	63.96	74.00	-10.04	Peak
2	2483.910	-3.17	69.12	65.95	74.00	-8.05	Peak

Right Band edge\_Horizontal\_Average\_802.11n20

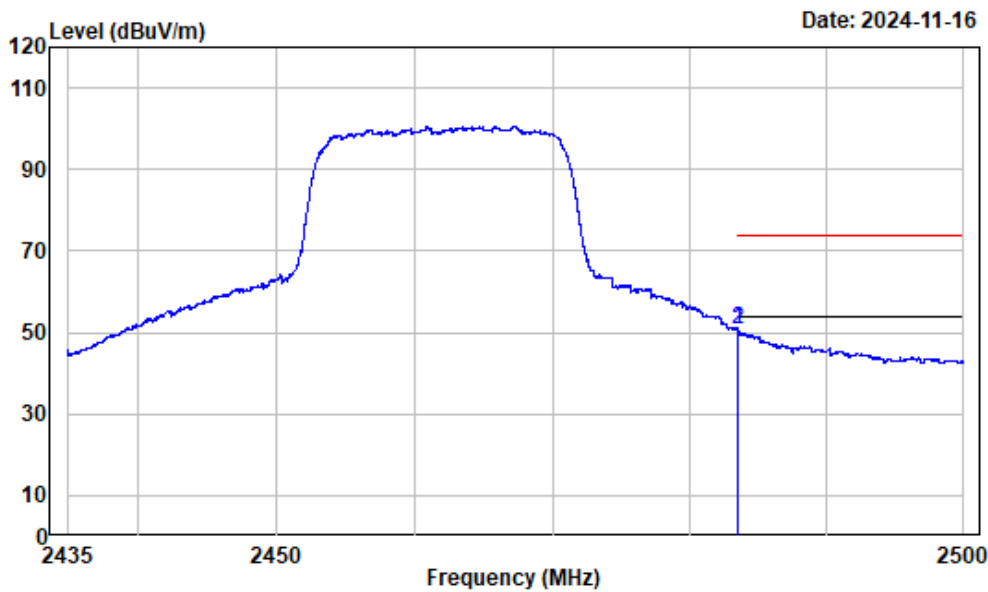


Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n20-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-3.17	53.75	50.58	54.00	-3.42	Average
2	2483.504	-3.17	54.02	50.85	54.00	-3.15	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz


Right Band edge\_Vertical\_Peak\_802.11n20

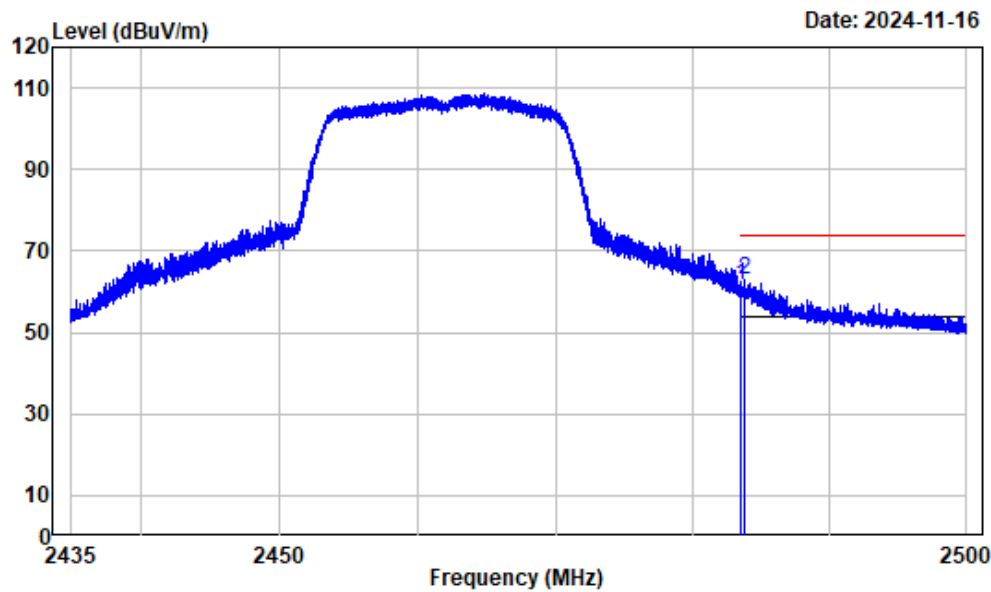

Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n20-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-3.17	64.81	61.64	74.00	-12.36	Peak
2	2483.748	-3.17	66.32	63.15	74.00	-10.85	Peak

Right Band edge\_Vertical\_Average\_802.11n20

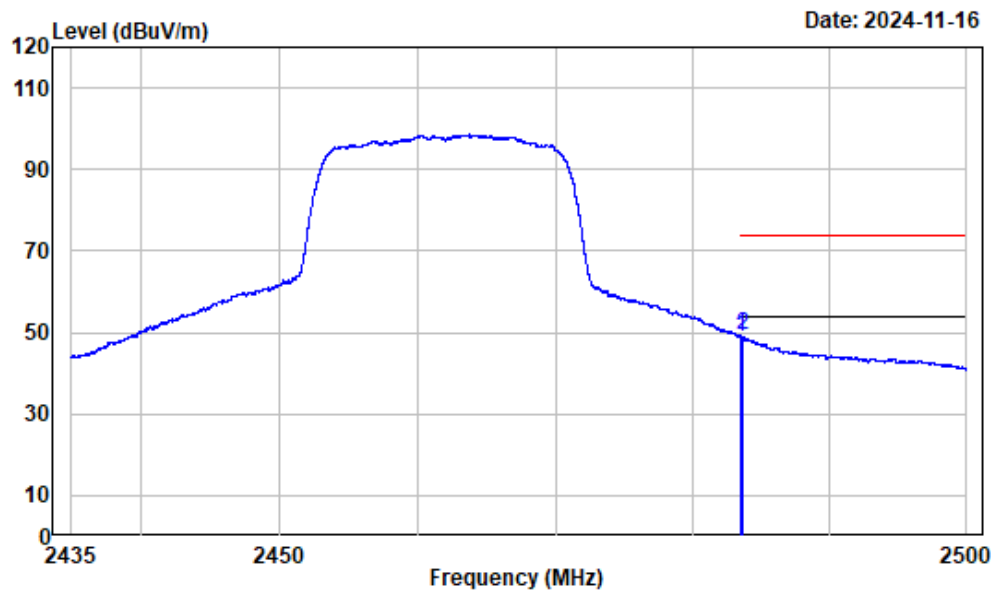


Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n20-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-3.17	52.15	48.98	54.00	-5.02	Average
2	2483.634	-3.17	52.41	49.24	54.00	-4.76	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz




Left Band edge\_Horizontal\_Peak\_802.11n40

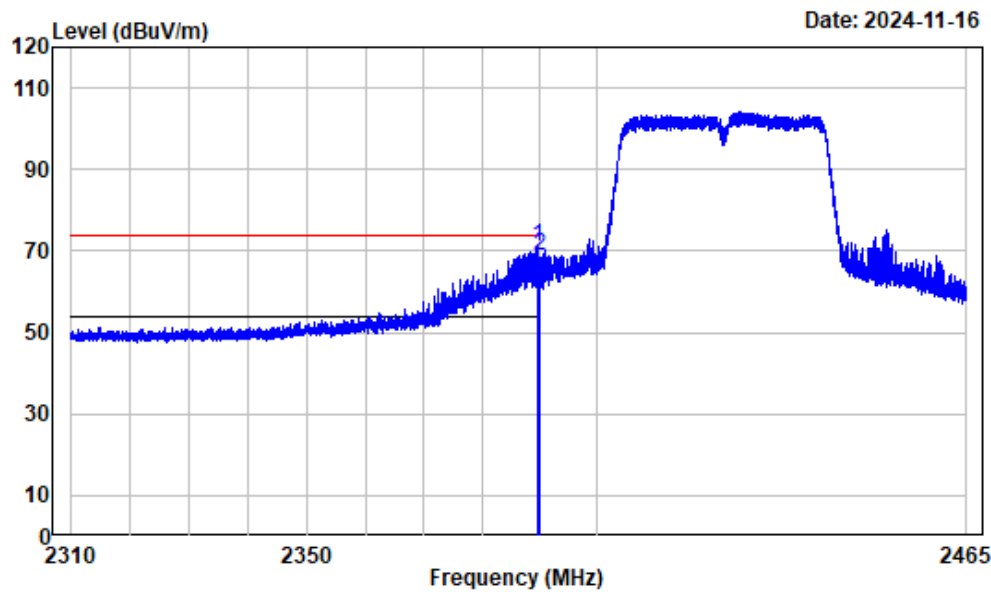

Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n40-2422

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.603	-3.20	74.10	70.90	74.00	-3.10	Peak
2	2390.000	-3.20	71.96	68.76	74.00	-5.24	Peak

Left Band edge\_Horizontal\_Average\_802.11n40

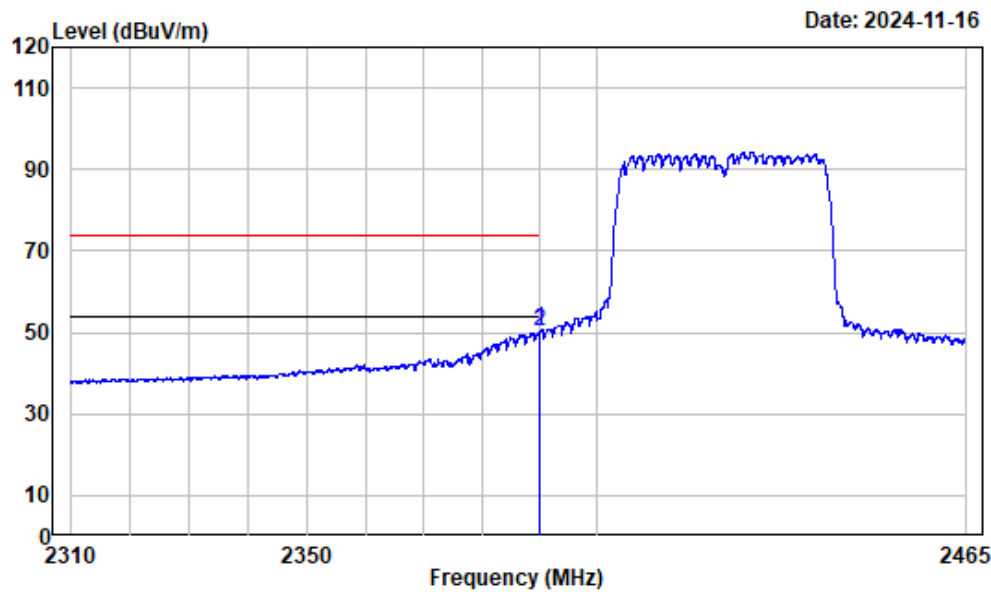


Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n40-2422

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.913	-3.20	53.97	50.77	54.00	-3.23	Average
2	2390.000	-3.20	53.42	50.22	54.00	-3.78	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz


Left Band edge\_Vertical\_Peak\_802.11n40

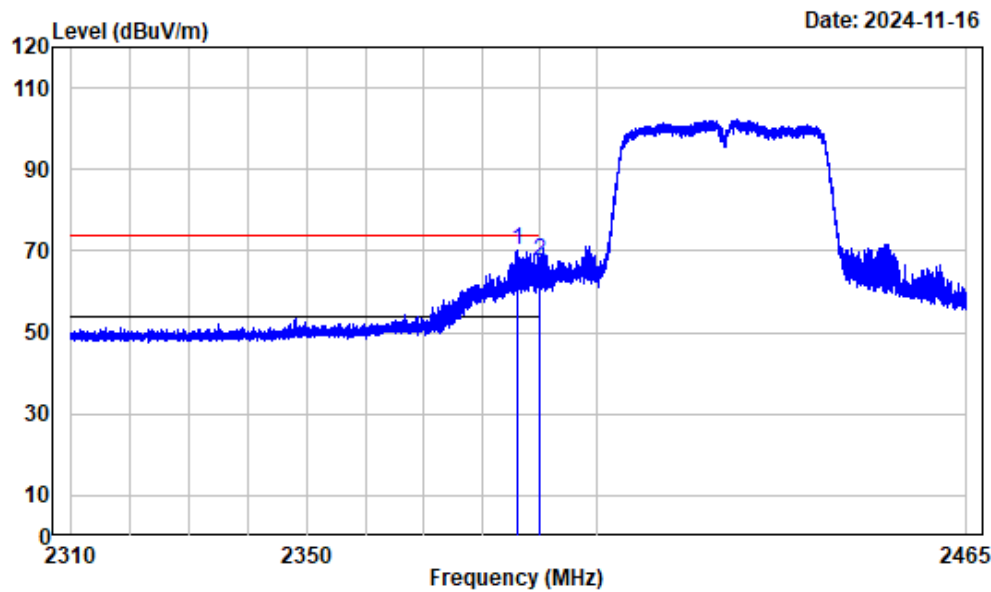

Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n40-2422

		Read		Limit	Over	Remark
Freq		Factor	Level	Level	Line	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	2386.231	-3.19	73.21	70.02	74.00	-3.98 Peak
2	2390.000	-3.20	70.87	67.67	74.00	-6.33 Peak

Left Band edge\_Vertical\_Average\_802.11n40

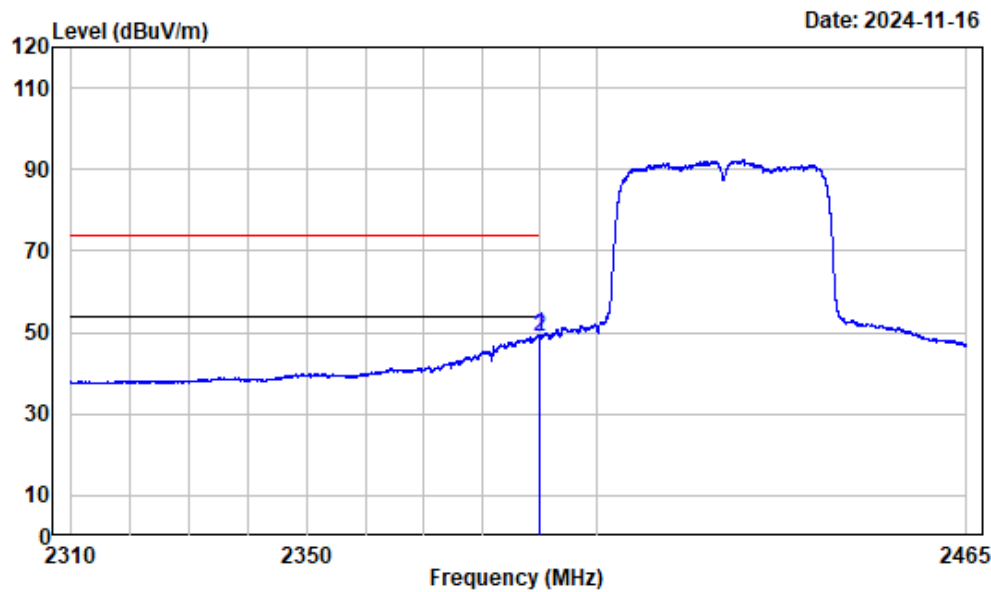


Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n40-2422

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.777	-3.20	52.69	49.49	54.00	-4.51	Average
2	2390.000	-3.20	52.23	49.03	54.00	-4.97	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz


Right Band edge\_Horizontal\_Peak\_802.11n40

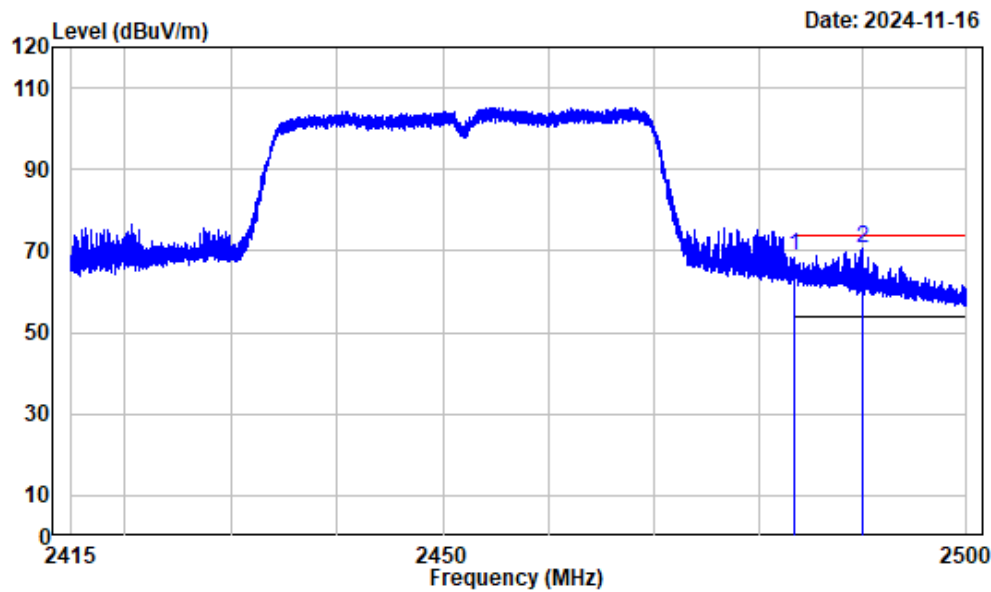

Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n40-2452

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-3.17	71.82	68.65	74.00	-5.35	Peak
2	2490.001	-3.18	73.63	70.45	74.00	-3.55	Peak

Right Band edge\_Horizontal\_Average\_802.11n40

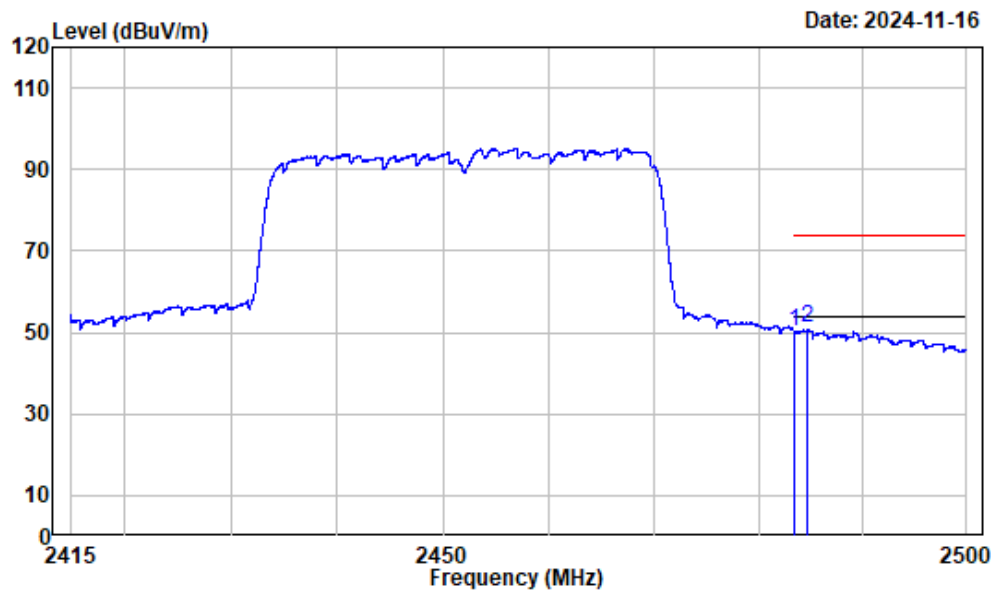


Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n40-2452

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-3.17	53.24	50.07	54.00	-3.93	Average
2	2484.666	-3.17	54.16	50.99	54.00	-3.01	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz


Right Band edge\_Vertical\_Peak\_802.11n40

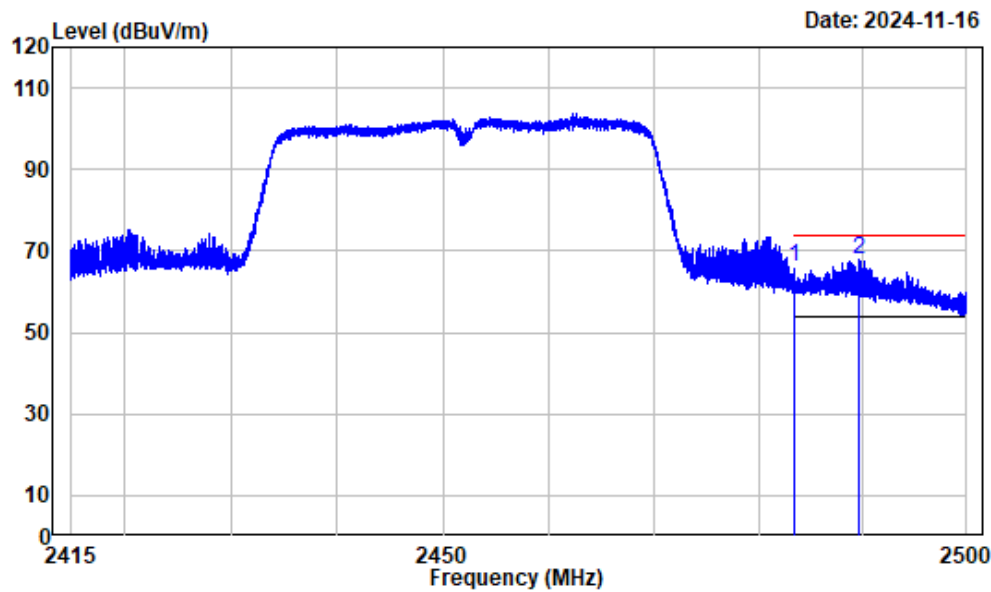

Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n40-2452

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-3.17	69.42	66.25	74.00	-7.75	Peak
2	2489.692	-3.18	71.30	68.12	74.00	-5.88	Peak

Right Band edge\_Vertical\_Average\_802.11n40

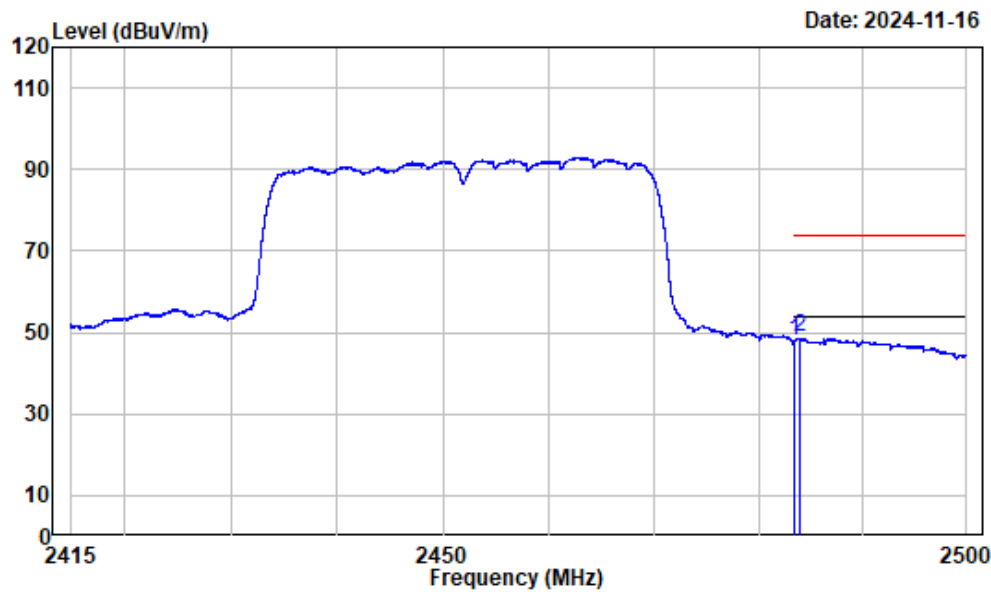

Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n40-2452


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-3.17	51.38	48.21	54.00	-5.79	Average
2	2484.039	-3.17	52.22	49.05	54.00	-4.95	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz



Worst harmonic test plots for each mode as below


1-4GHz\_Horizontal\_802.11b

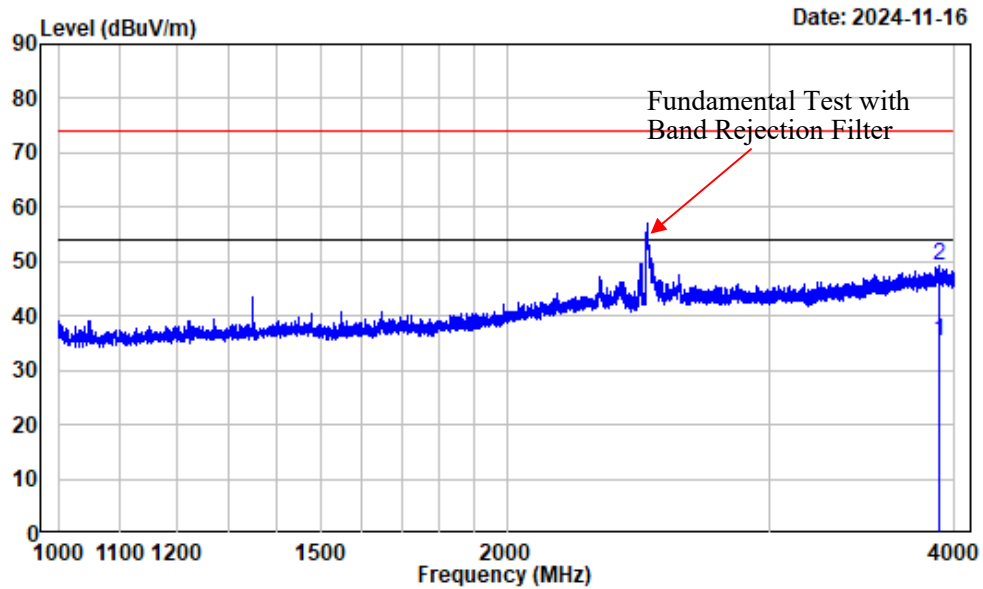

Condition : Horizontal  
 Project No.: 2401W92117E-RF  
 Tester : Zenos Qiao  
 Note : 2.4GWiFi-b-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3909.614	-0.46	35.75	35.29	54.00	-18.71	Average
2	3909.614	-0.46	49.66	49.20	74.00	-24.80	Peak


1-4GHz\_Vertical\_802.11b

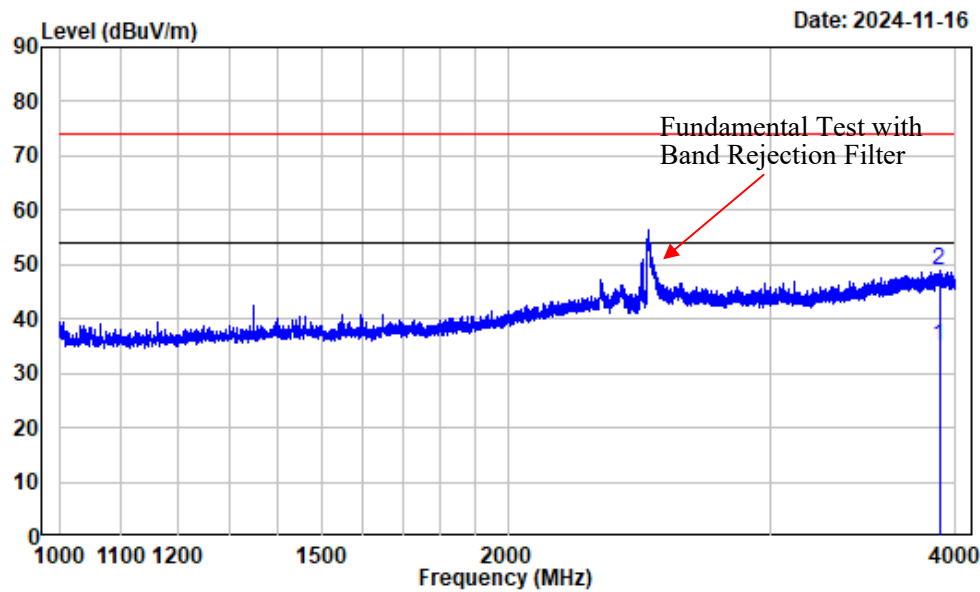

Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-b-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3900.988	-0.52	35.54	35.02	54.00	-18.98	Average
2	3900.988	-0.52	49.52	49.00	74.00	-25.00	Peak


4-18GHz\_Horizontal\_Peak\_802.11b

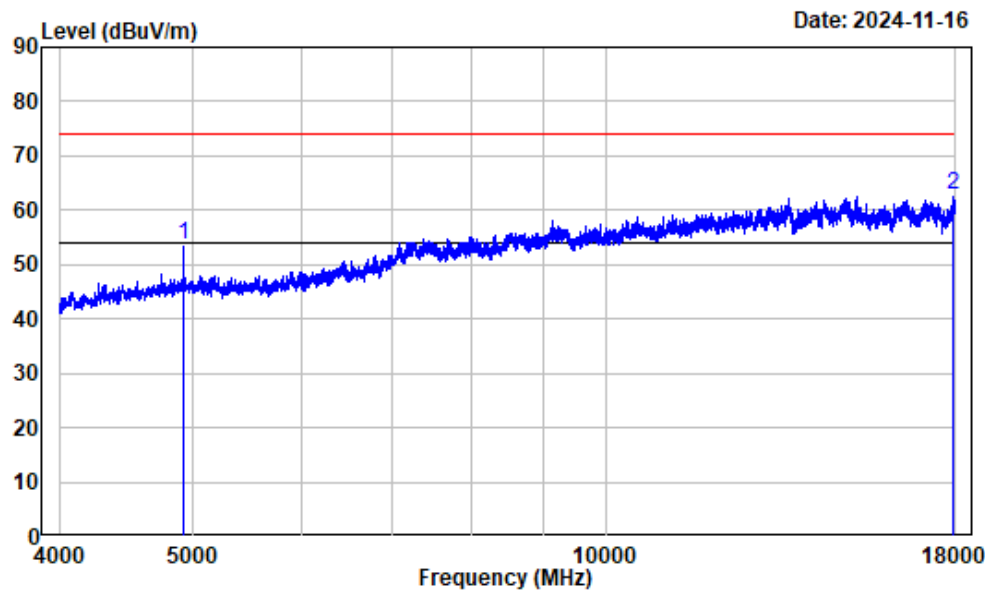

Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-b-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	2.63	50.89	53.52	74.00	-20.48	Peak
2	17954.490	24.30	38.43	62.73	74.00	-11.27	Peak

4-18GHz\_Horizontal\_Average\_802.11b

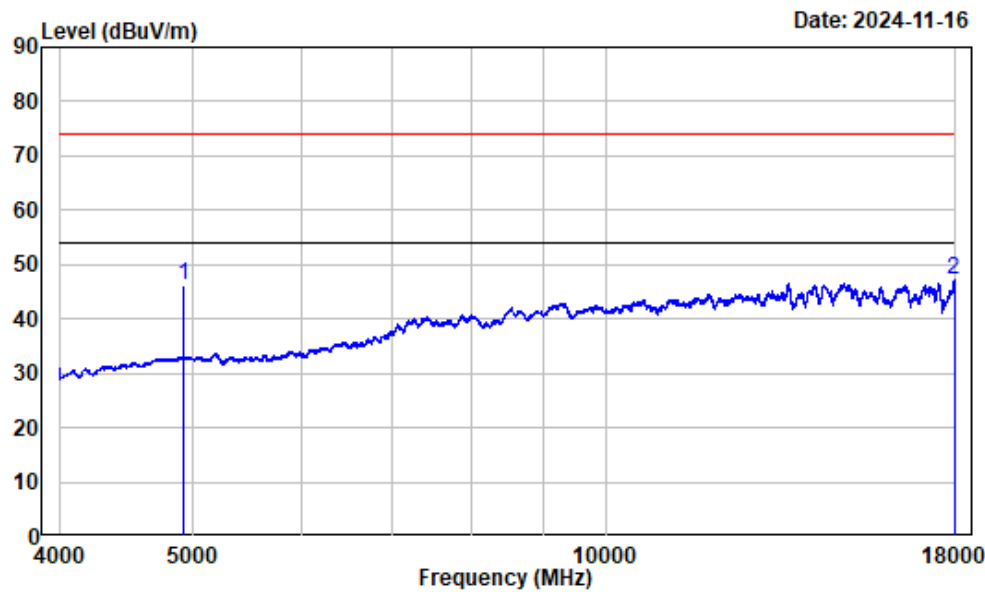


Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-b-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	2.63	43.64	46.27	54.00	-7.73	Average
2	17956.240	24.31	22.80	47.11	54.00	-6.89	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz


4-18GHz\_Verical\_Peak\_802.11b

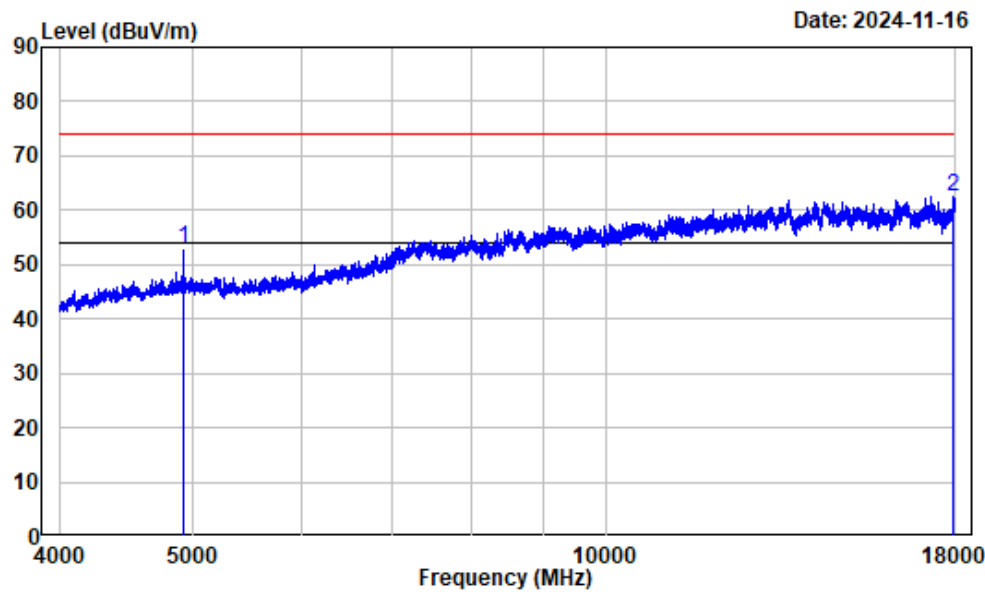

Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-b-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	2.63	50.31	52.94	74.00	-21.06	Peak
2	17952.740	24.29	38.24	62.53	74.00	-11.47	Peak

4-18GHz\_Vertical\_Average\_802.11b

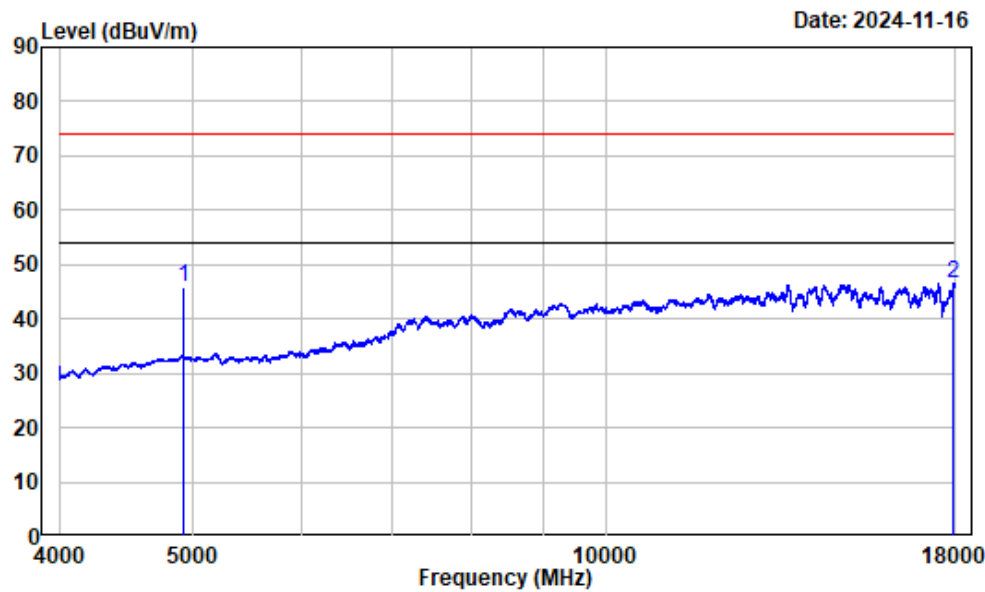


Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-b-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	2.63	43.25	45.88	54.00	-8.12	Average
2	17947.490	24.24	22.29	46.53	54.00	-7.47	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz


1-4GHz\_Horizontal\_802.11g

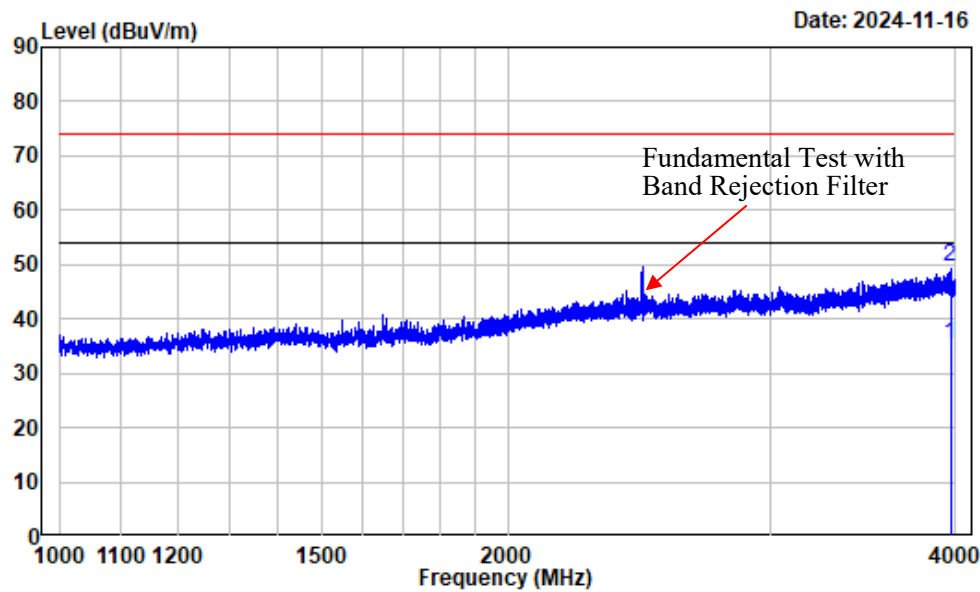

Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-g-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3968.496	-0.19	35.68	35.49	54.00	-18.51	Average
2	3968.496	-0.19	49.64	49.45	74.00	-24.55	Peak

1-4GHz\_Vertical\_802.11g

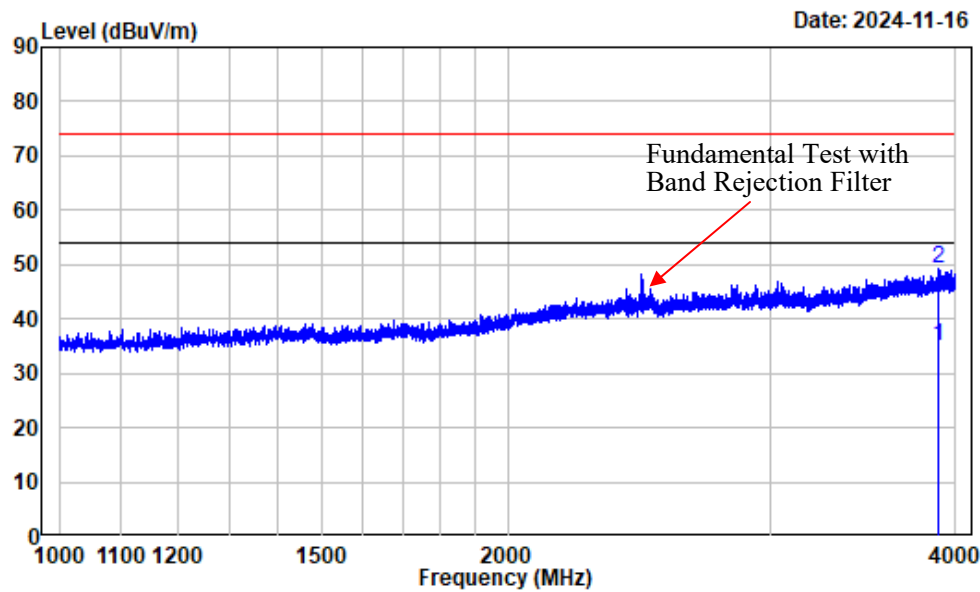


Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-g-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3892.362	-0.56	35.47	34.91	54.00	-19.09	Average
2	3892.362	-0.56	49.85	49.29	74.00	-24.71	Peak




4-18GHz\_Horizontal\_Peak\_802.11g

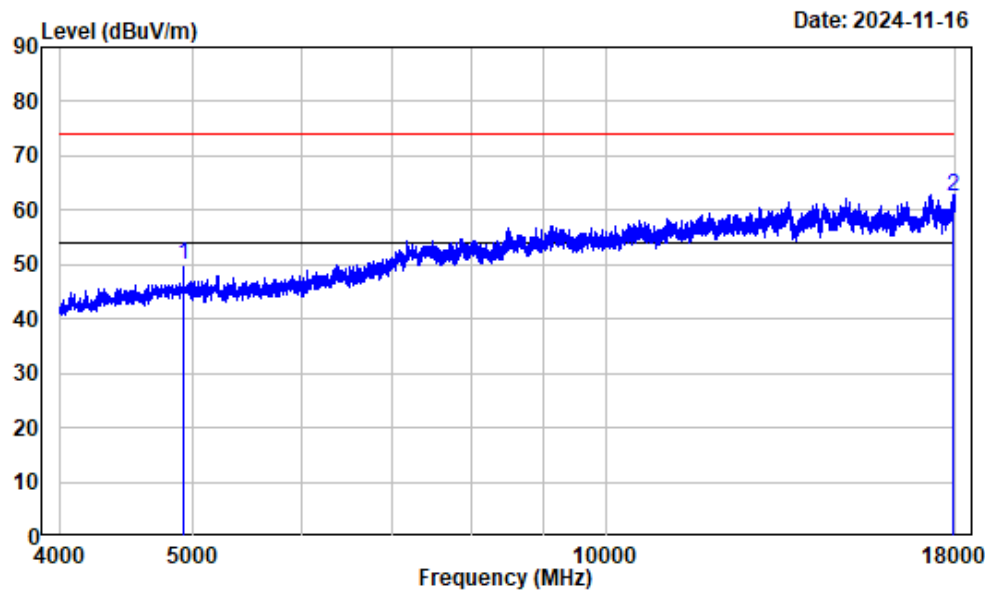

Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-g-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	2.63	47.29	49.92	74.00	-24.08	Peak
2	17950.990	24.28	38.13	62.41	74.00	-11.59	Peak

4-18GHz\_Horizontal\_Average\_802.11g

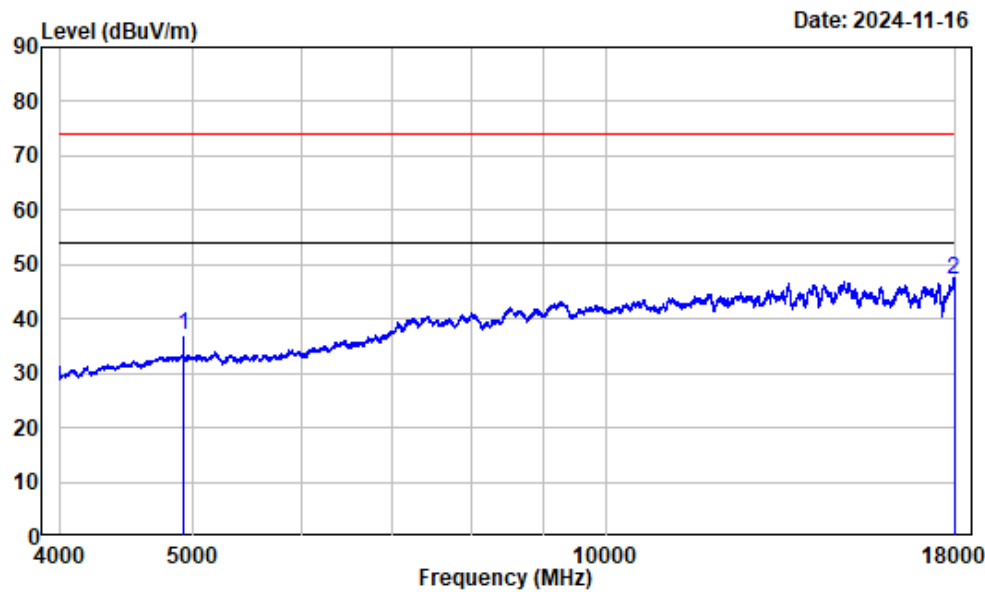


Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-g-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	2.63	34.30	36.93	54.00	-17.07	Average
2	17956.240	24.31	22.75	47.06	54.00	-6.94	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz


4-18GHz\_Verical\_Peak\_802.11g

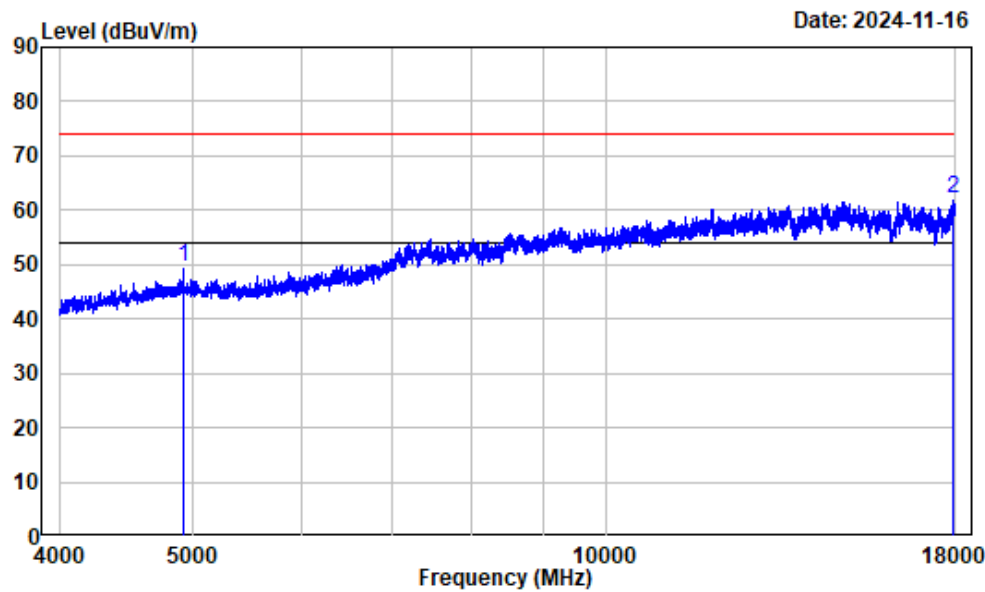

Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-g-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	2.63	46.91	49.54	74.00	-24.46	Peak
2	17947.490	24.24	37.82	62.06	74.00	-11.94	Peak

4-18GHz\_Vertical\_Average\_802.11g

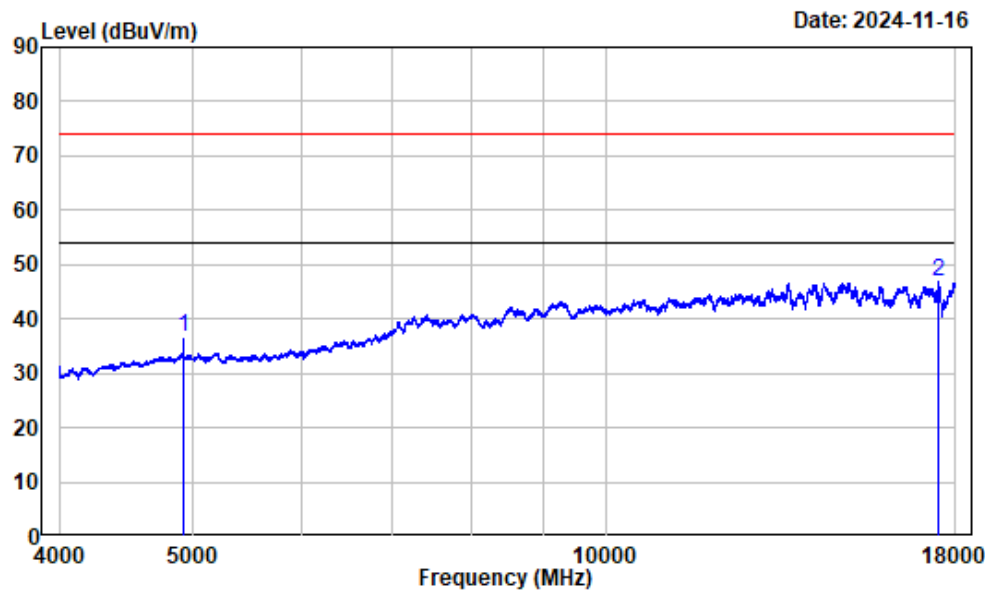


Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-g-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	2.63	34.04	36.67	54.00	-17.33	Average
2	17492.440	20.33	26.41	46.74	54.00	-7.26	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz


1-4GHz\_Horizontal\_802.11n-HT20

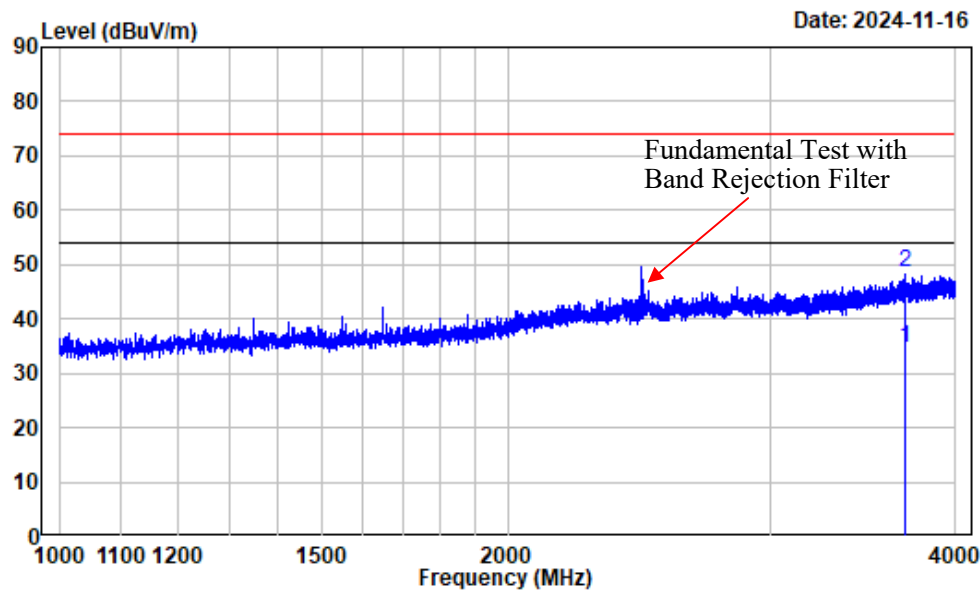

Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n20-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3698.462	-1.17	35.96	34.79	54.00	-19.21	Average
2	3698.462	-1.17	49.57	48.40	74.00	-25.60	Peak


1-4GHz\_Vertical\_802.11n-HT20

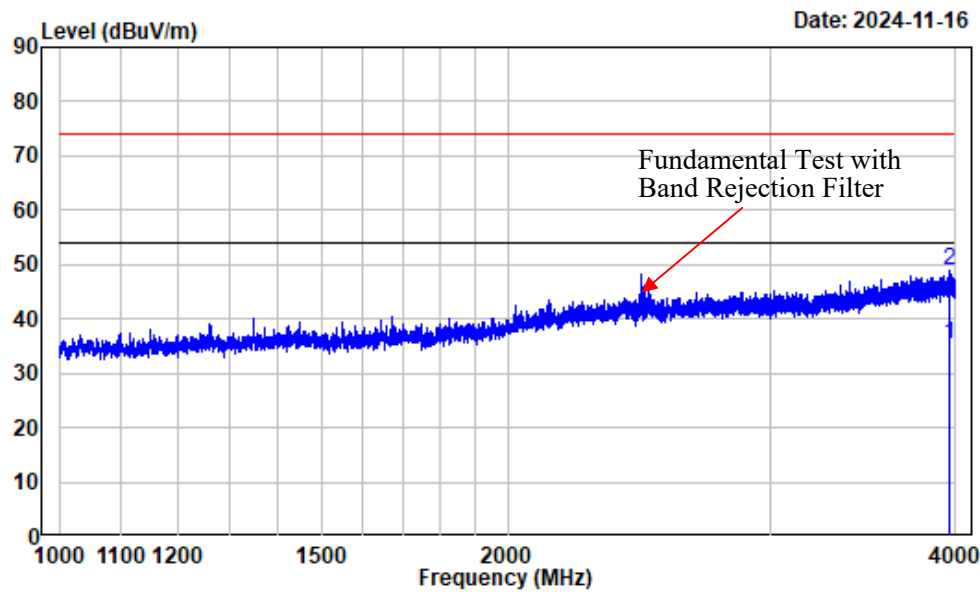

Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n20-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3966.996	-0.18	35.59	35.41	54.00	-18.59	Average
2	3966.996	-0.18	49.12	48.94	74.00	-25.06	Peak


4-18GHz\_Horizontal\_Peak\_802.11n-HT20

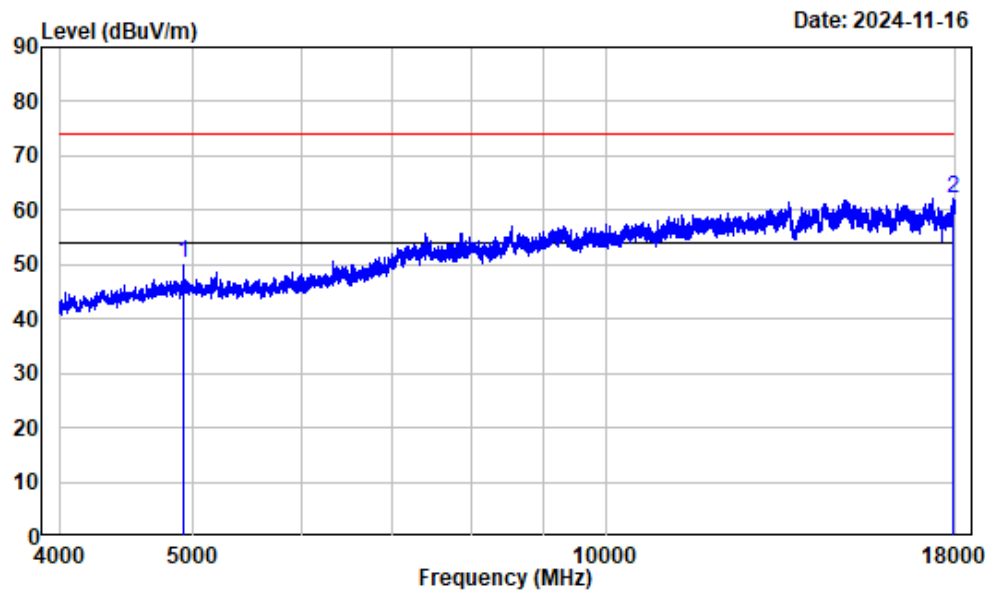

Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n20-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	2.63	47.52	50.15	74.00	-23.85	Peak
2	17940.490	24.19	38.04	62.23	74.00	-11.77	Peak

4-18GHz\_Horizontal\_Average\_802.11n-HT20

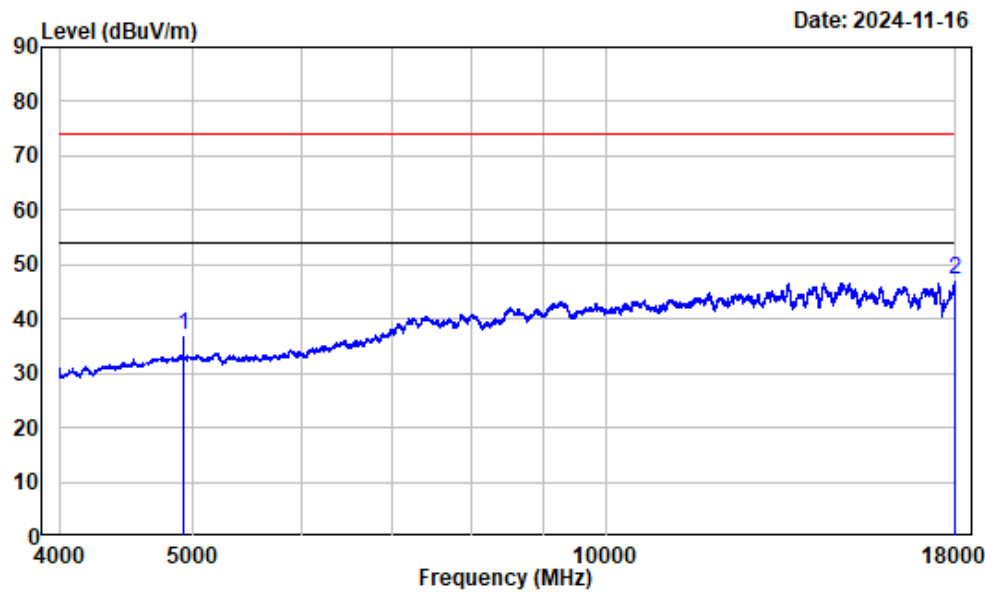


Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n20-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	2.63	34.34	36.97	54.00	-17.03	Average
2	17998.250	24.61	22.51	47.12	54.00	-6.88	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz




4-18GHz\_Vertical\_Peak\_802.11n-HT20

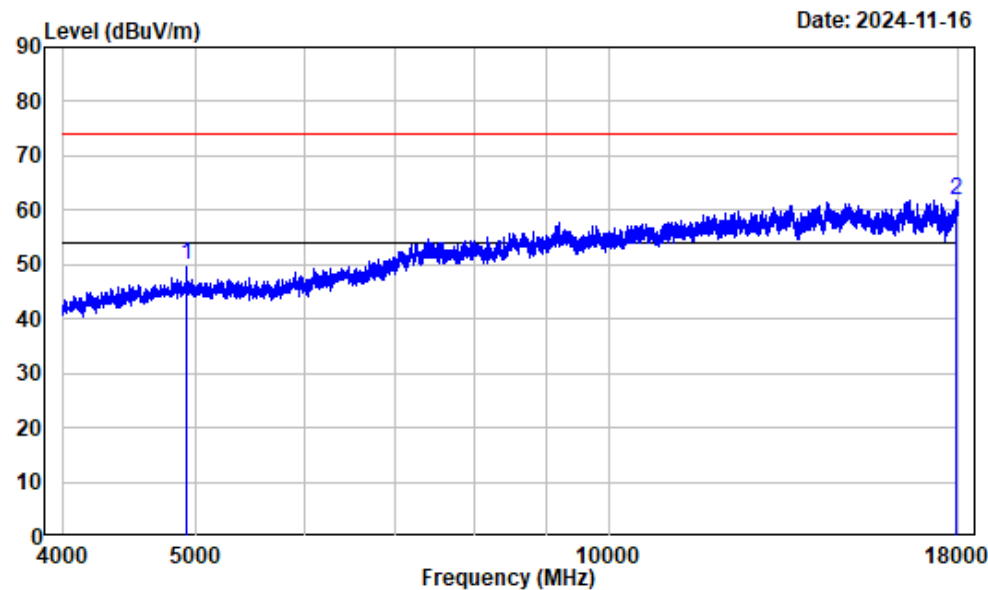

Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n20-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	2.63	47.27	49.90	74.00	-24.10	Peak
2	17950.990	24.28	37.55	61.83	74.00	-12.17	Peak

4-18GHz\_Vertical\_Average\_802.11n-HT20

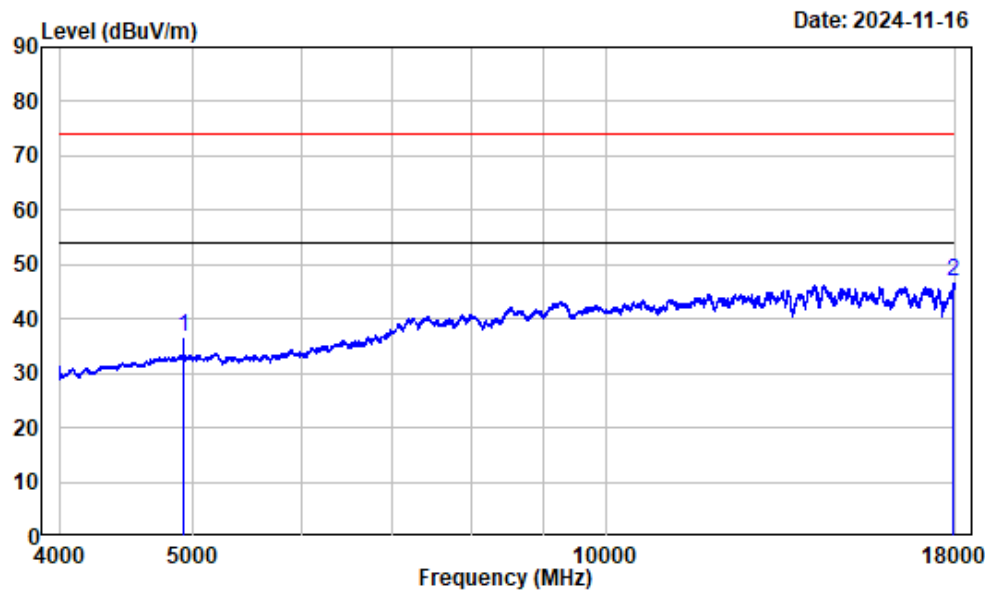


Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n20-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	2.63	34.15	36.78	54.00	-17.22	Average
2	17943.990	24.22	22.70	46.92	54.00	-7.08	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz


1-4GHz\_Horizontal\_802.11n-HT40

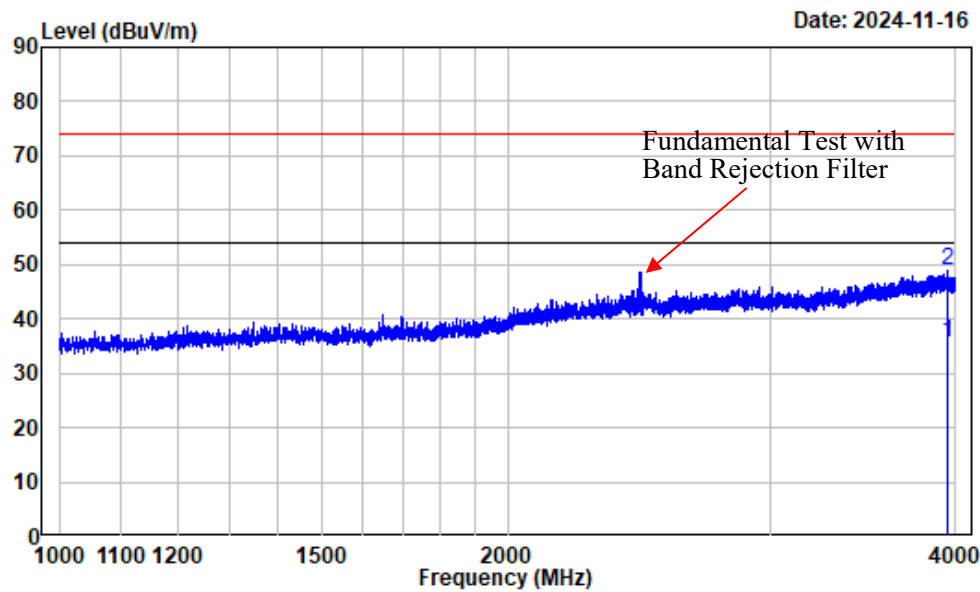

Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n40-2452

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3950.494	-0.16	35.89	35.73	54.00	-18.27	Average
2	3950.494	-0.16	49.00	48.84	74.00	-25.16	Peak


1-4GHz\_Vertical\_802.11n-HT40

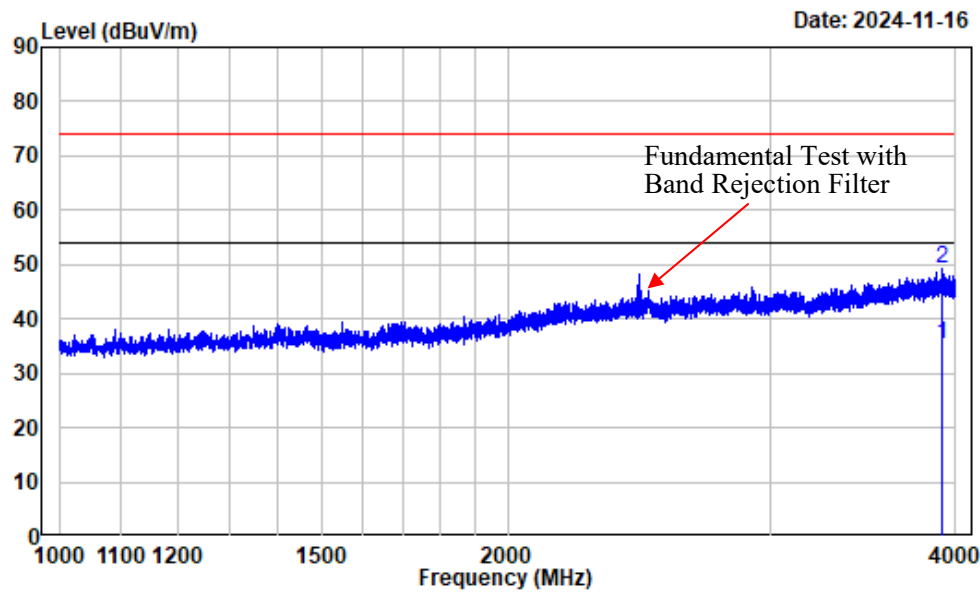

Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n40-2452

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3917.490	-0.40	35.64	35.24	54.00	-18.76	Average
2	3917.490	-0.40	49.55	49.15	74.00	-24.85	Peak


4-18GHz\_Horizontal\_Peak\_802.11n-HT40

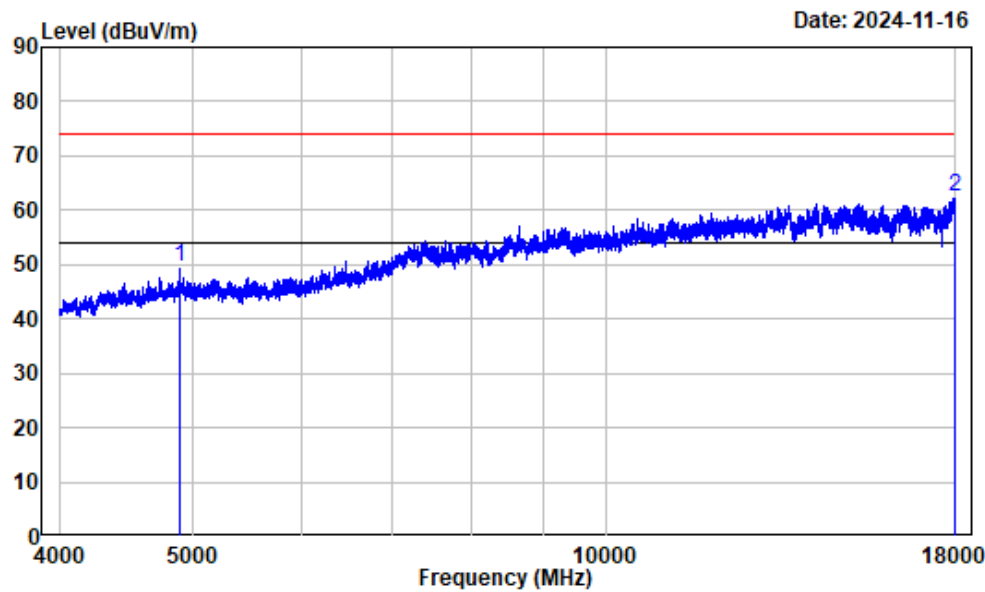

Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n40-2452

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4904.000	2.64	46.98	49.62	74.00	-24.38	Peak
2	17993.000	24.57	37.91	62.48	74.00	-11.52	Peak

4-18GHz\_Horizontal\_Average\_802.11n-HT40

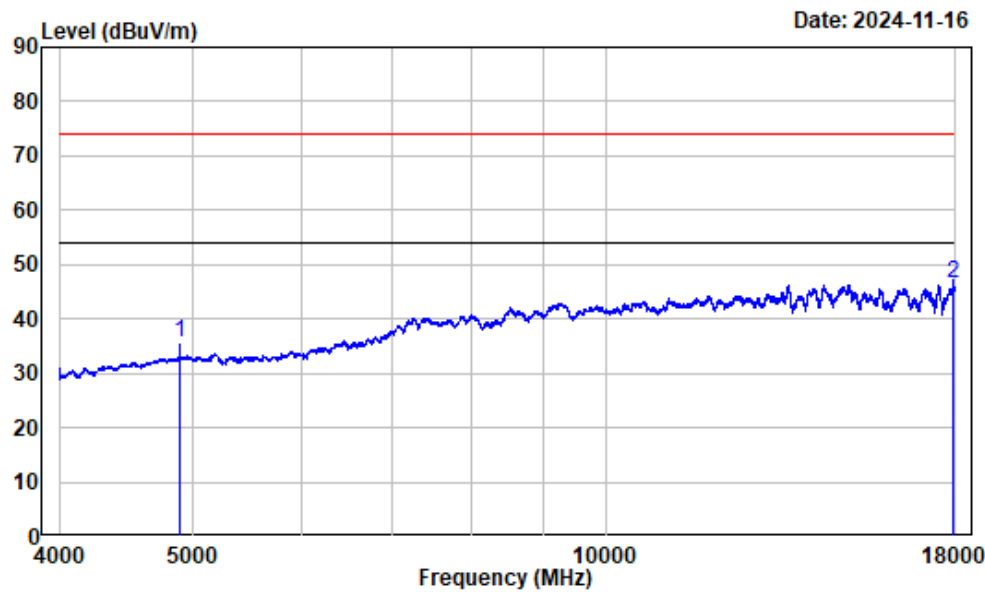


Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n40-2452

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4904.000	2.64	33.19	35.83	54.00	-18.17	Average
2	17947.490	24.24	22.31	46.55	54.00	-7.45	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz


4-18GHz\_Vertical\_Peak\_802.11n-HT40

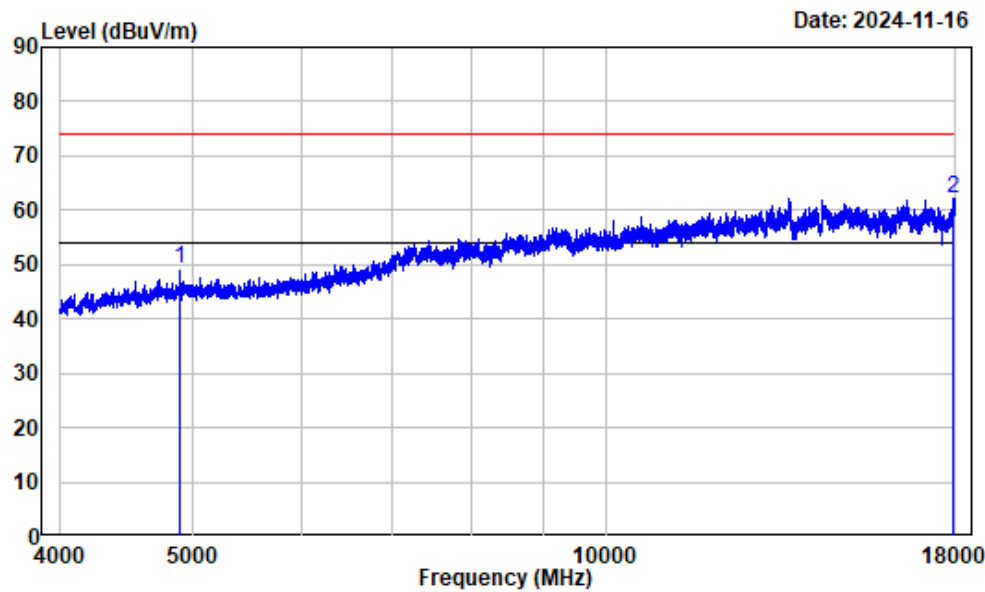

Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n40-2452

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4904.000	2.64	46.71	49.35	74.00	-24.65	Peak
2	17929.990	24.12	38.15	62.27	74.00	-11.73	Peak

4-18GHz\_Vertical\_Average\_802.11n-HT40

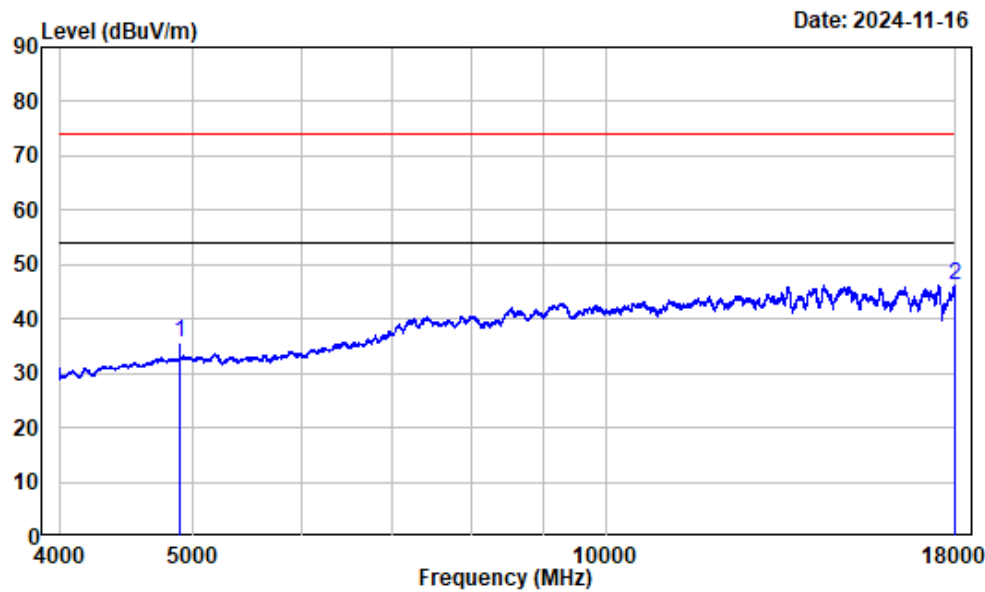


Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-n40-2452

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4904.000	2.64	33.02	35.66	54.00	-18.34	Average
2	17994.540	24.62	21.59	46.21	54.00	-7.79	Average

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz




For 18-25 GHz test plots, just show the worst case (802.11b mode)  
18-25GHz\_Horizontal

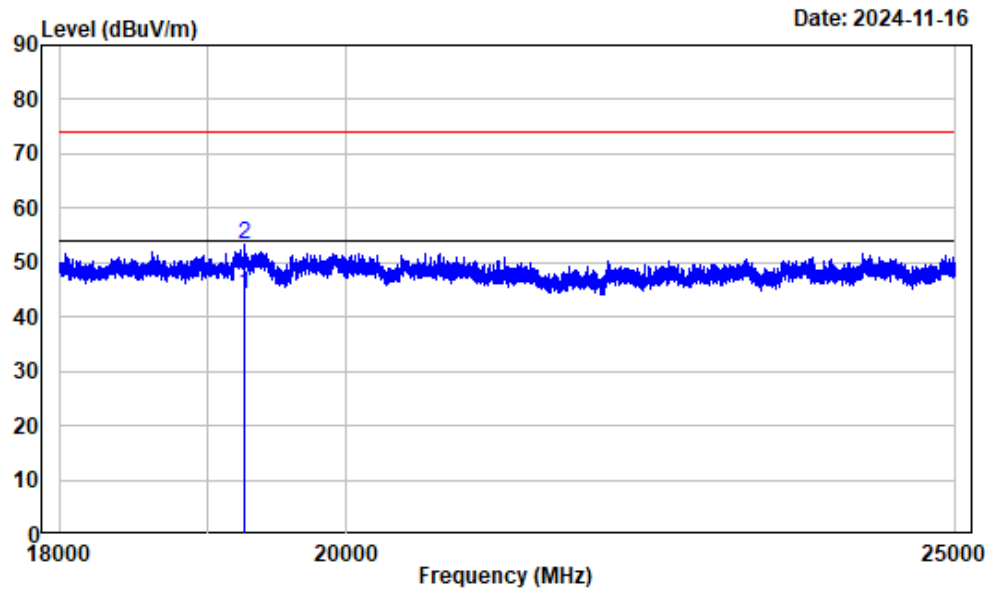

Condition : Horizontal  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-b-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	19258.410	15.25	28.87	44.12	54.00	-9.88	Average
2	19258.410	15.25	38.03	53.28	74.00	-20.72	Peak

18-25GHz\_Vertical

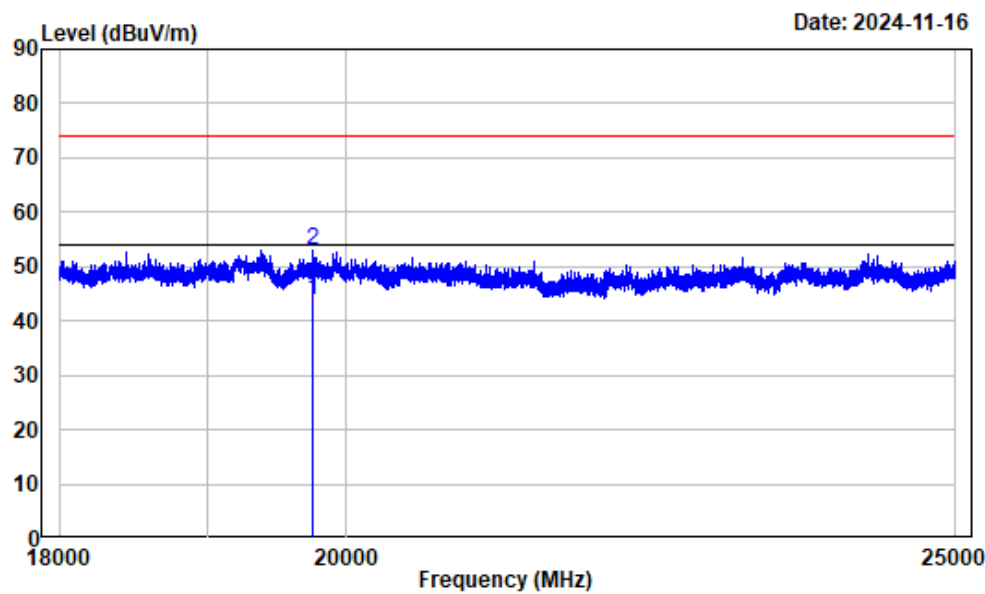

Condition : Vertical  
Project No.: 2401W92117E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-b-2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	19752.840	15.39	28.59	43.98	54.00	-10.02	Average
2	19752.840	15.39	37.71	53.10	74.00	-20.90	Peak

## **RF Conducted data**

Please refer to Annex "Appendix A" for detail test data.

## RF EXPOSURE EVALUATION

### MAXIMUM PERMISSIBLE EXPOSURE (MPE)

#### Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance V01

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(3)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$ .
1.34-30	$3,450 R^2/f^2$ .
30-300	$3.83 R^2$ .
300-1,500	$0.0128 R^2 f$ .
1,500-100,000	$19.2 R^2$ .

R is the minimum separation distance in meters

f = frequency in MHz

#### Result

Mode	Frequency (MHz)	Tune up conducted power <sup>#</sup> (dBm)	Antenna Gain <sup>#</sup>		ERP		Evaluation Distance (m)	ERP Limit (W)
			(dBi)	(dBd)	(dBm)	(W)		
2.4G Wi-Fi	2412-2462	24.00	3.42	1.27	25.27	0.337	0.2	0.768

Note:

1. The tune up conducted power<sup>#</sup> and antenna gain<sup>#</sup> were declared by the applicant.
2. The 2.4G and 5G Wi-Fi cannot transmit at same time.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

**Result: Compliant**

## **EUT PHOTOGRAPHS**

Please refer to the attachment 2401W92117E-RF External photo and 2401W92117E-RF Internal photo.

## **TEST SETUP PHOTOGRAPHS**

---

Please refer to the attachment 2401W92117E-RFA Test Setup photo.

**\*\*\*\*\* END OF REPORT \*\*\*\*\***