



FCC PART 15.249
TEST REPORT

For

JEM ACCESSORIES INC.

32 Brunswick Avenue, Edison, New Jersey, United States, 08817

FCC ID: 2AHAS-XCA2-1013R

Report Type: Original Report	Product Type: Basic Wireless Keyboard USB Receiver
Report Number: RSZ201217836-00	
Report Date: 2021-07-06	
Reviewed By: RF Engineer	Jacob Kong <i>Jacob Kong</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “★”.

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “*”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY.....	3
TEST FACILITY	4
SYSTEM TEST CONFIGURATION	5
JUSTIFICATION	5
EUT EXERCISE SOFTWARE	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
SUPPORT CABLE DESCRIPTIONS.....	5
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
TEST EQUIPMENT LIST	8
FCC§15.203 - ANTENNA REQUIREMENT	9
APPLICABLE STANDARD	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.207 – AC LINE CONDUCTED EMISSIONS	10
APPLICABLE STANDARD	10
EUT SETUP	10
EMI TEST RECEIVER SETUP.....	10
TEST PROCEDURE	10
CORRECTED FACTOR & MARGIN CALCULATION	11
TEST RESULTS SUMMARY	11
TEST DATA	11
FCC§15.205, §15.209 & §15.249(A)(C)(D) - RADIATED EMISSIONS	14
APPLICABLE STANDARD	14
TEST EQUIPMENT SETUP	14
EUT SETUP	15
TEST PROCEDURE	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	16
TEST DATA	16
FCC§15.215(C) - 20DB EMISSION BANDWIDTH	23
APPLICABLE STANDARD	23
TEST PROCEDURE	23
TEST DATA	23

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Basic Wireless Keyboard USB Receiver
Tested Model	XCA2-1013-BLK
Frequency Range	2405~2475 MHz
Maximum Field Strength	73.65dBuV/m@3m
Modulation Technique	GFSK
Antenna Specification*	0dBi (It is provided by the applicant)
Voltage Range	DC5.0V from USB Port
Date of Test	2020-12-21 to 2021-01-29
Sample serial number	RSZ201217836-RF-S1(Assigned by BAACL, Shenzhen)
Received date	2020-12-17
Sample/EUT Status	Good condition

Objective

This type approval report is in accordance with Part 2-Subpart J, and Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209, 15.215 and 15.249 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
AC Power Lines Conducted Emissions		±1.95dB
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±1°C
Humidity		±6%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing by manufacturer.

Frequency List

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2405	9	2457
2	2408	10	2460
3	2411	11	2463
4	2414	12	2466
5	2417	13	2469
6	2448	14	2472
7	2451	15	2475
8	2454	/	/

Channel 1, Channel 7 and Channel 15 were selected for testing.

EUT Exercise Software

No software was used to the EUT tested.

Equipment Modifications

No modifications were made to the unit tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Dell	Notebook	Latitude E5430	11429208685
Dell	AC Adapter	PA-10	Unknown

Support Cable Descriptions

Cable Description	Length (m)	From/Port	To
Un-shielded Un-detachable DC Cable	1.5	Notebook	Adapter
Un-shielded Un-detachable DC Cable	1.0	Adapter	Receptacle

Block Diagram of Test Setup

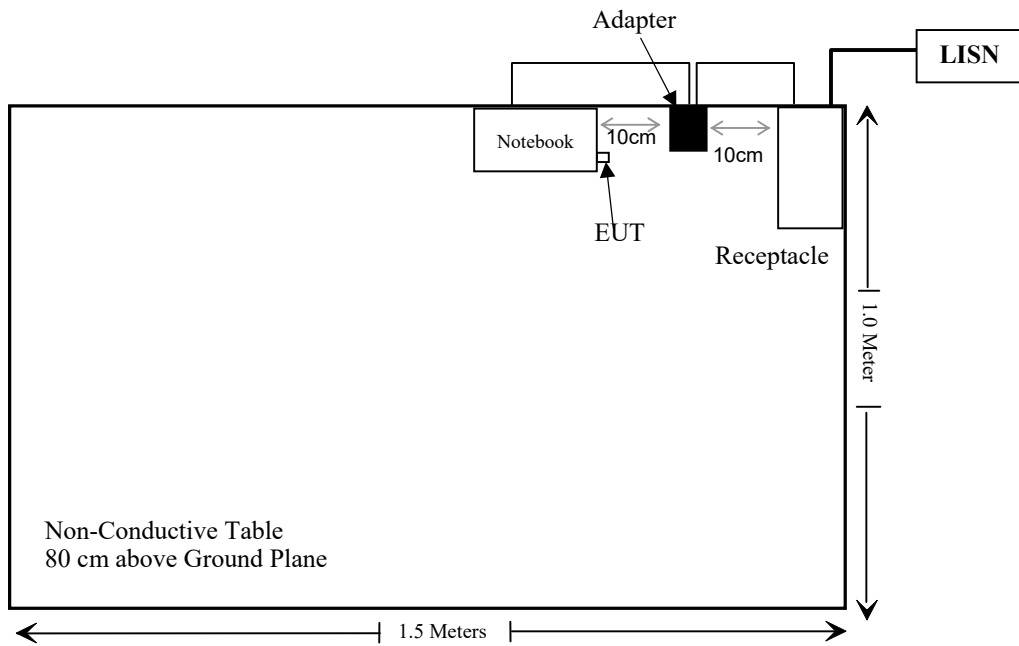

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207(a)	Conduction Emissions	Compliance
15.205, §15.209, §15.249(a)(c)(d)	Radiated Emissions& Outside of Band Emission	Compliance
§15.215 (c)	20 dB Bandwidth	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2020/08/04	2021/08/03
Rohde & Schwarz	LISN	ENV216	101613	2020/08/04	2021/08/03
Rohde & Schwarz	Transient Limitor	ESH3Z2	DE25985	2020/11/29	2021/11/28
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2020/11/29	2021/11/28
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
Radiated Emission Test					
R&S	EMI Test Receiver	ESR3	102455	2020/08/04	2021/08/03
Sonoma instrument	Pre-amplifier	310 N	186238	2020/08/04	2021/08/03
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2020/12/22	2023/12/21
Unknown	Cable 2	RF Cable 2	F-03-EM197	2020/11/29	2021/11/28
Unknown	Cable	Chamber Cable 1	F-03-EM236	2020/11/29	2021/11/28
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2020/08/04	2021/08/03
COM-POWER	Pre-amplifier	PA-122	181919	2020/11/29	2021/11/28
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2020/11/29	2021/11/28
Sunol Sciences	Horn Antenna	DRH-118	A052604	2020/12/22	2023/12/21
Insulted Wire Inc.	RF Cable	SPS-2503-3150	02222010	2020/11/29	2021/11/28
Unknown	RF Cable	W1101-EQ1 OUT	F-19-EM005	2020/11/29	2021/11/28
SNSD	Band Reject filter	BSF2402-2480MN-0898-001	2.4G filter	2020/04/20	2021/04/20
Ducommun Technologies	Horn antenna	ARH-4223-02	1007726-021304	2020/12/06	2023/12/05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one PCB antenna which was permanently attached and the antenna gain is 0dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 – AC LINE CONDUCTED EMISSIONS

Applicable Standard

According to FCC §15.207

EUT Setup

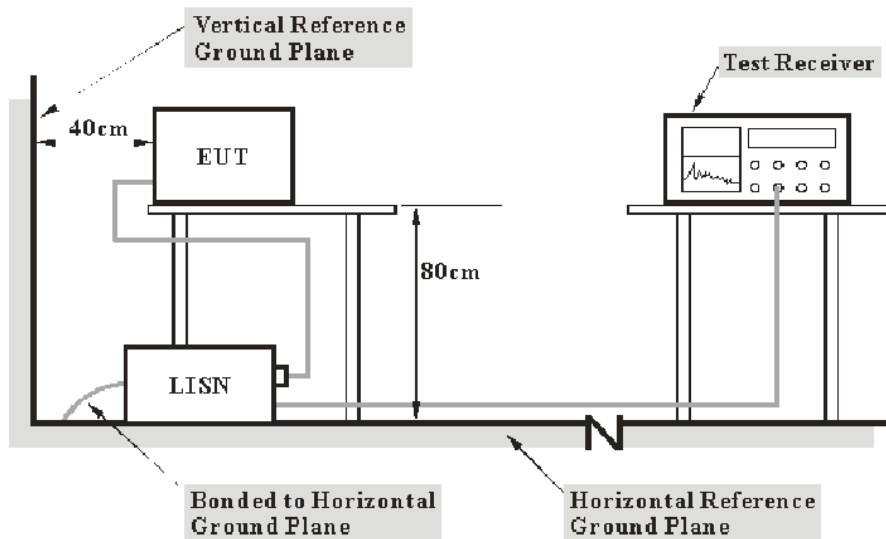

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with per ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the EUT complied with the FCC Part 15.207,

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	65 %
ATM Pressure:	101.0 kPa

The testing was performed by Haiguo Li on 2020-12-21.

EUT Operation Mode: Transmitting

AC 120V/60 Hz,

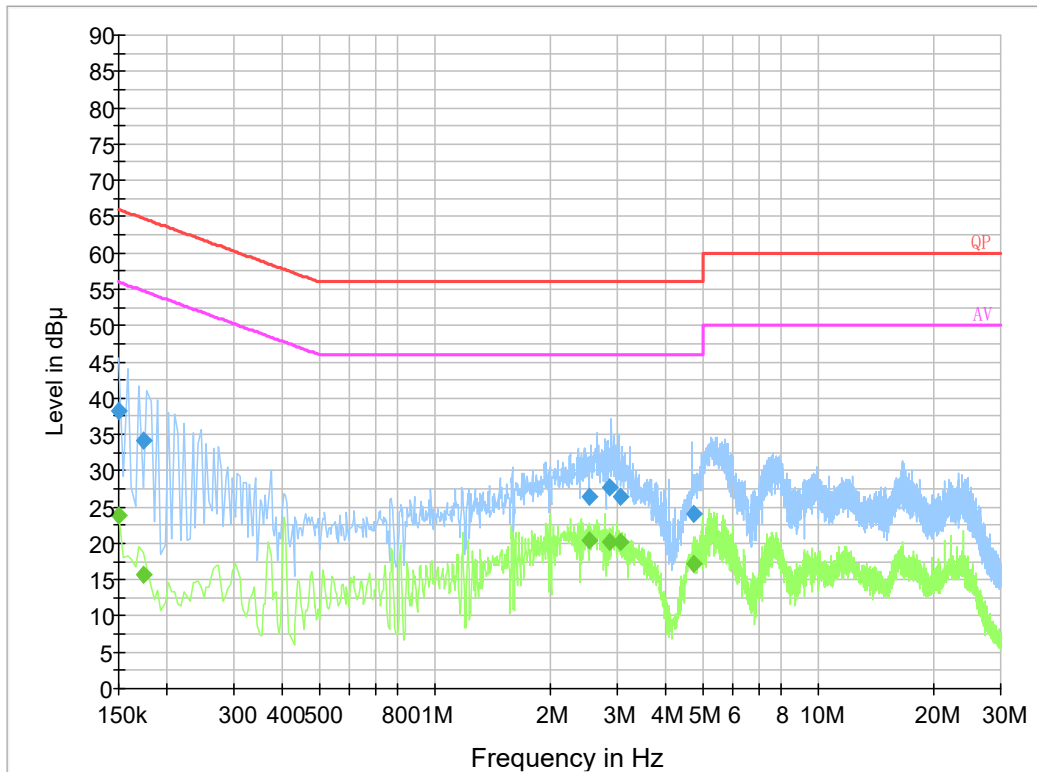

Line


Final Result 1

Frequency (MHz)	QuasiPeak (dB µ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
0.150000	38.2	9.000	L1	19.8	27.8	66.0
0.174500	34.2	9.000	L1	19.9	30.5	64.7
2.523690	26.5	9.000	L1	19.8	29.5	56.0
2.870470	27.7	9.000	L1	19.9	28.3	56.0
3.044730	26.5	9.000	L1	19.9	29.5	56.0
4.747710	24.0	9.000	L1	19.9	32.0	56.0

Final Result 2

Frequency (MHz)	Average (dB µ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
0.150000	23.8	9.000	L1	19.8	32.2	56.0
0.174500	15.8	9.000	L1	19.9	38.9	54.7
2.523690	20.4	9.000	L1	19.8	25.6	46.0
2.870470	20.1	9.000	L1	19.9	25.9	46.0
3.044730	20.1	9.000	L1	19.9	25.9	46.0
4.747710	17.3	9.000	L1	19.9	28.7	46.0

AC 120V/60 Hz, Neutral

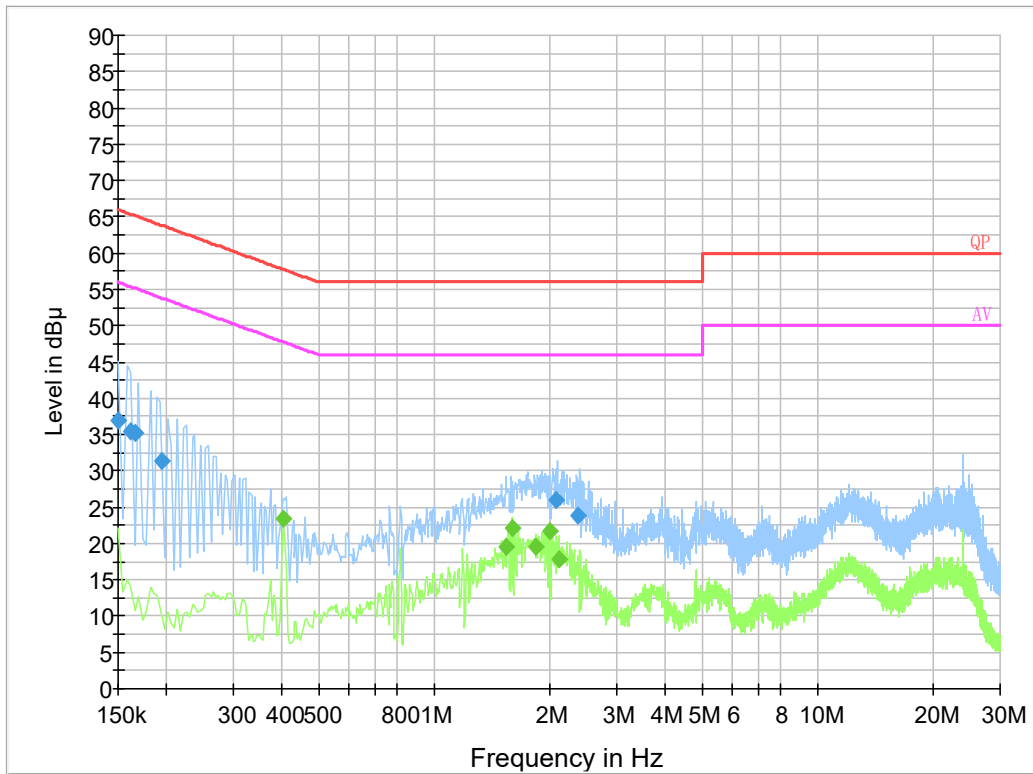

Final Result 1

Frequency (MHz)	QuasiPeak (dB µ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
0.150000	37.1	9.000	N	19.8	28.9	66.0
0.161500	35.4	9.000	N	19.8	30.0	65.4
0.165500	35.1	9.000	N	19.8	30.1	65.2
0.194500	31.3	9.000	N	19.8	32.5	63.8
2.082410	26.0	9.000	N	19.9	30.0	56.0
2.377910	23.8	9.000	N	19.8	32.2	56.0

Final Result 2

Frequency (MHz)	Average (dB µ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
0.406000	23.4	9.000	N	19.8	24.3	47.7
1.538000	19.5	9.000	N	19.8	26.5	46.0
1.598000	22.2	9.000	N	19.8	23.8	46.0
1.850000	19.6	9.000	N	19.9	26.4	46.0
2.006000	21.6	9.000	N	19.9	24.4	46.0
2.126000	17.8	9.000	N	19.9	28.2	46.0

FCC§15.205, §15.209 & §15.249(a)(c)(d) - RADIATED EMISSIONS

Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.

As per FCC§15.249 (d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.


Test Equipment Setup

The system was investigated from 30 MHz to 25 GHz.


Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

EUT Setup

Below 1GHz:

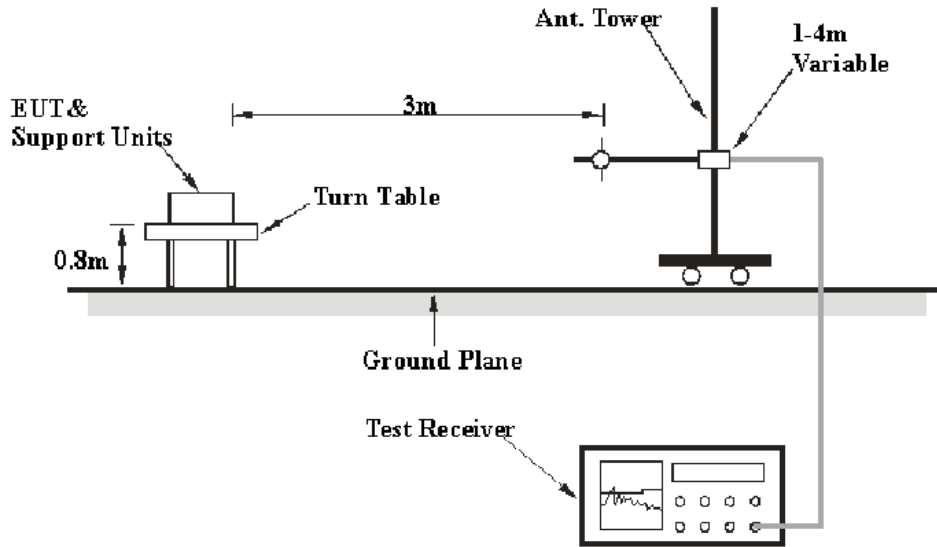

Above 1GHz:

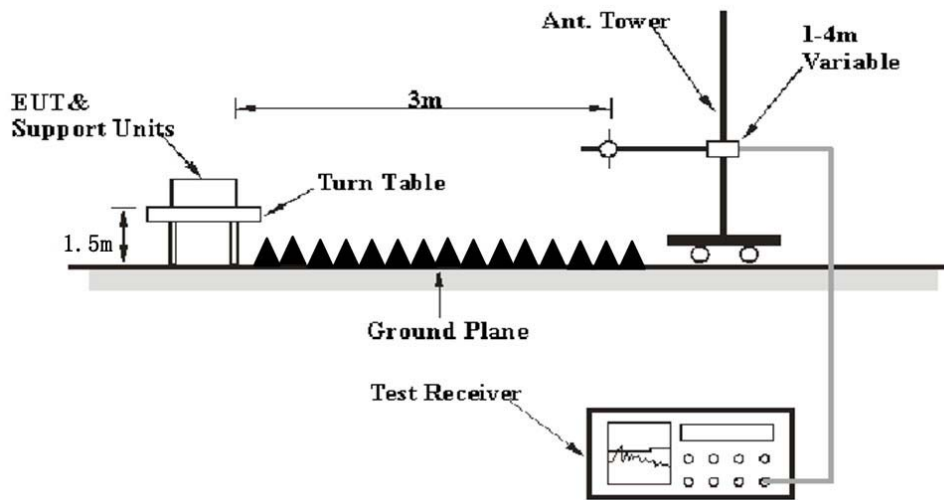

The radiated emission and out of band emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 3 meter away from the testing antenna, which is varied from 1-4 mete, and the EUT is placed on a turntable, which is 0.8 meter above ground plane for below 1GHz or 1.5 meter for above 1GHz, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data


Environmental Conditions

Temperature:	20.4~24 °C
Relative Humidity:	42~56 %
ATM Pressure:	101.1 kPa

The testing was performed by Holland Yang on 2021-01-29 for below 1GHz and Alan He on 2021-01-28 for above 1GHz.

Test Mode: Transmitting

30MHz – 1 GHz (worst case is Low channel):

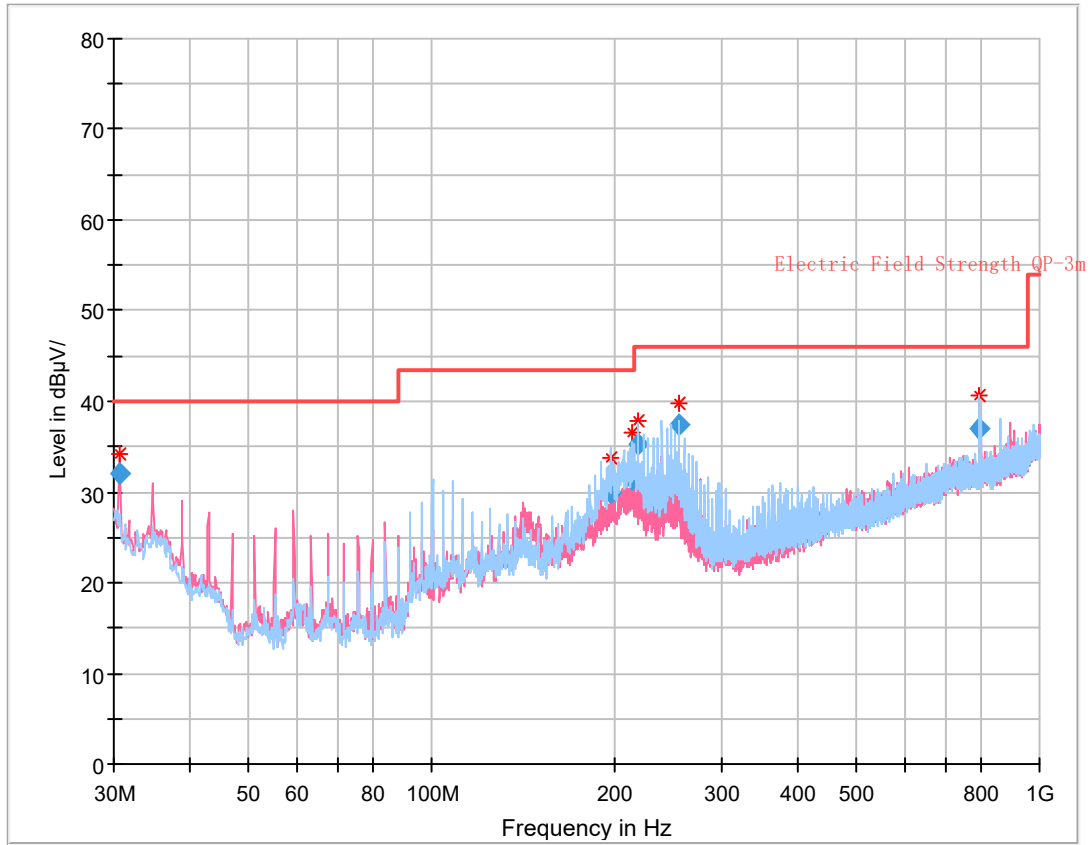

Final Result

Frequency (MHz)	QuasiPeak (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
30.727375	32.13	40.00	7.87	102.0	V	252.0	1.9
196.726750	29.92	43.50	13.58	164.0	H	251.0	-5.4
213.933625	31.39	43.50	12.11	113.0	H	202.0	-5.3
219.134875	35.36	46.00	10.64	125.0	H	166.0	-5.4
256.014250	37.33	46.00	8.67	105.0	H	130.0	-5.6
796.660125	36.91	46.00	9.09	117.0	H	0.0	5.5

1 GHz - 25 GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBµV/m)	FCC Part 15.249&15.209	
	Reading (dBµV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
Low Channel (2405 MHz)									
2405.00	41.78	PK	257	2.0	H	31.87	73.65	114	40.35
2405.00	38.33	Ave.	257	2.0	H	31.87	70.20	94	23.80
2405.00	38.59	PK	69	1.5	V	31.87	70.46	114	43.54
2405.00	35.74	Ave.	69	1.5	V	31.87	67.61	94	26.39
2389.47	28.56	PK	241	2.2	H	31.87	60.43	74	13.57
2389.47	14.55	Ave.	241	2.2	H	31.87	46.42	54	7.58
2484.54	28.48	PK	153	2.1	H	32.13	60.61	74	13.39
2484.54	14.57	Ave.	153	2.1	H	32.13	46.70	54	7.30
4810.00	44.75	PK	85	1.3	H	6.28	51.03	74	22.97
4810.00	30.20	Ave.	85	1.3	H	6.28	36.48	54	17.52
Middle Channel (2451 MHz)									
2451.00	38.42	PK	4	2.5	H	32.03	70.45	114	43.55
2451.00	35.81	Ave.	4	2.5	H	32.03	67.84	94	26.16
2451.00	35.24	PK	283	2.1	V	32.03	67.27	114	46.73
2451.00	33.05	Ave.	283	2.1	V	32.03	65.08	94	28.92
4902.00	44.62	PK	328	1.9	H	6.76	51.38	74	22.62
4902.00	29.65	Ave.	328	1.9	H	6.76	36.41	54	17.59
High Channel (2475 MHz)									
2475.00	38.25	PK	295	1.5	H	32.13	70.38	114	43.62
2475.00	34.62	Ave.	295	1.5	H	32.13	66.75	94	27.25
2475.00	35.18	PK	69	2.2	V	32.13	67.31	114	46.69
2475.00	32.89	Ave.	69	2.2	V	32.13	65.02	94	28.98
2384.53	28.91	PK	316	2.0	H	31.87	60.78	74	13.22
2384.53	14.56	Ave.	316	2.0	H	31.87	46.43	54	7.57
2485.15	28.84	PK	23	1.6	H	32.13	60.97	74	13.03
2485.15	14.53	Ave.	23	1.6	H	32.13	46.66	54	7.34
4950.00	44.46	PK	169	2.1	H	6.80	51.26	74	22.74
4950.00	29.35	Ave.	169	2.1	H	6.80	36.15	54	17.85


Note:

Corrected Amplitude = Corrected Factor + Reading


Corrected Factor=Antenna factor (RX) +cable loss - amplifier factor

Margin = Limit- Corr. Amplitude

Pre-scan with low channel Peak Horizontal

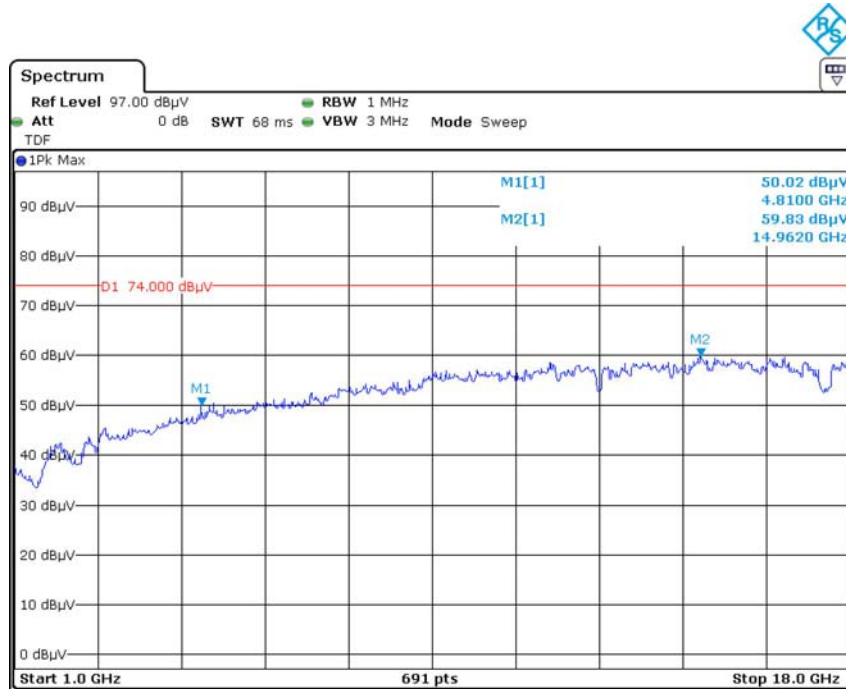


Date: 28.JAN.2021 20:07:54

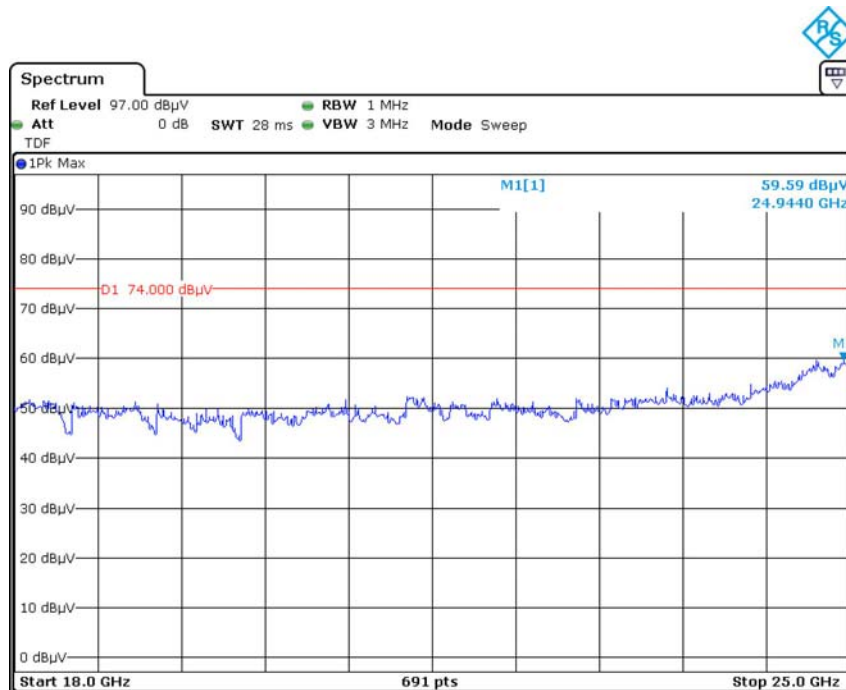


Date: 28.JAN.2021 20:52:33

Vertical

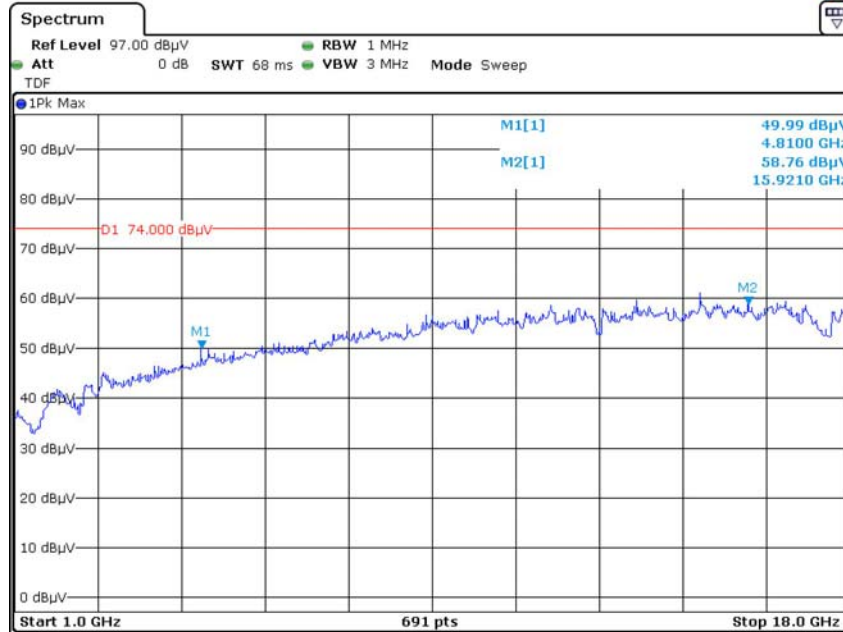


Date: 28.JAN.2021 20:18:17

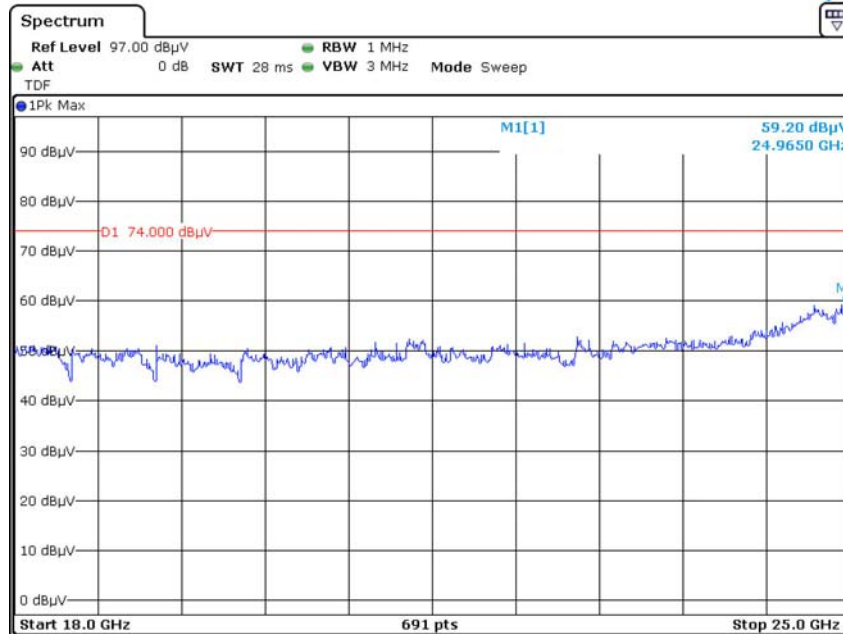


Date: 28.JAN.2021 20:59:13

Avenger Horizontal

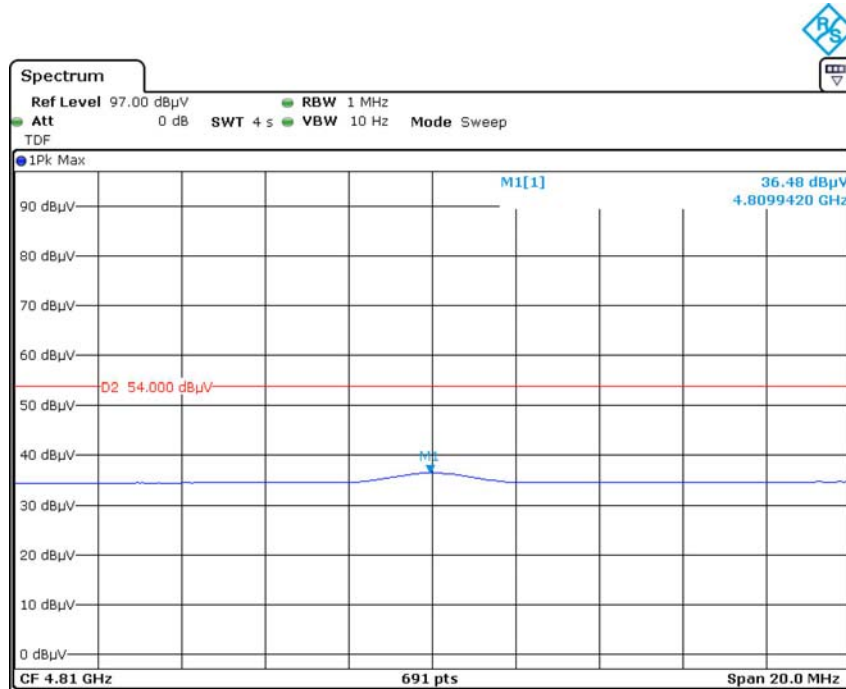


Date: 28.JAN.2021 20:11:15

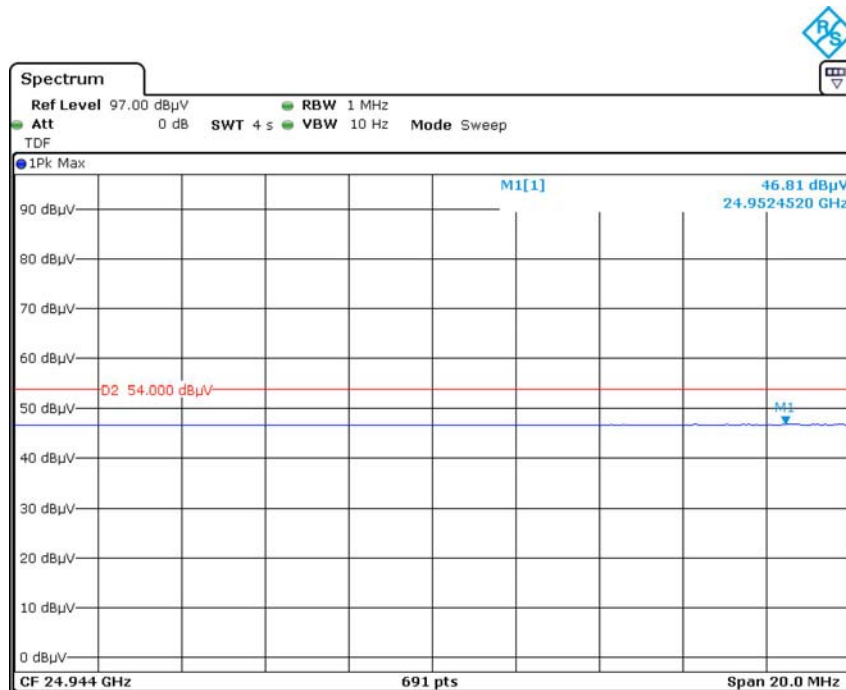


Date: 28.JAN.2021 20:55:55

Vertical

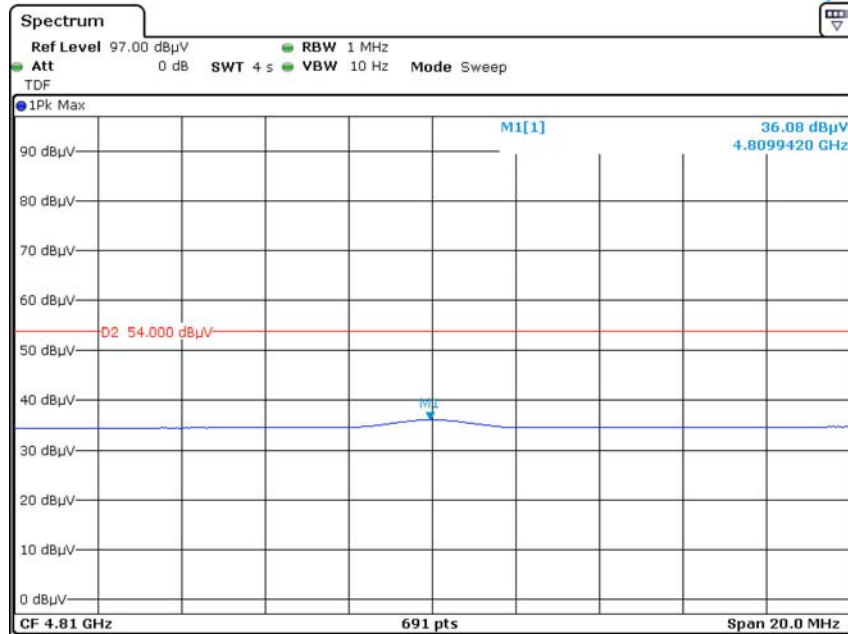

Date: 28.JAN.2021 20:22:49

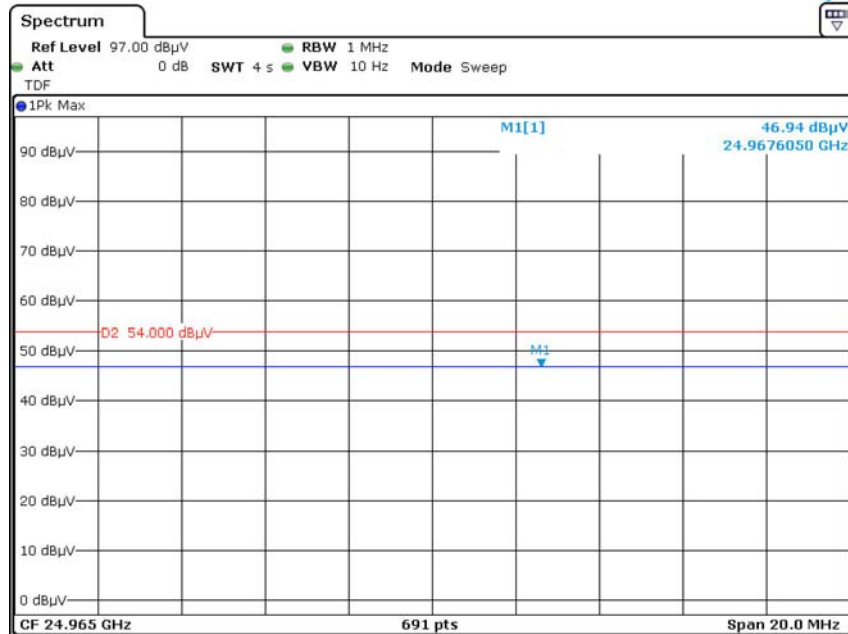

Date: 28.JAN.2021 21:02:32

FCC§15.215(c) - 20dB EMISSION BANDWIDTH

Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that indicated 20dB bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa


The testing was performed by Blaker Zhang on 2021-01-28.

Test Mode: Transmitting


Please refer to the following table and plots.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2405	2.619
Middle	2451	2.482
High	2475	2.496


Low Channel

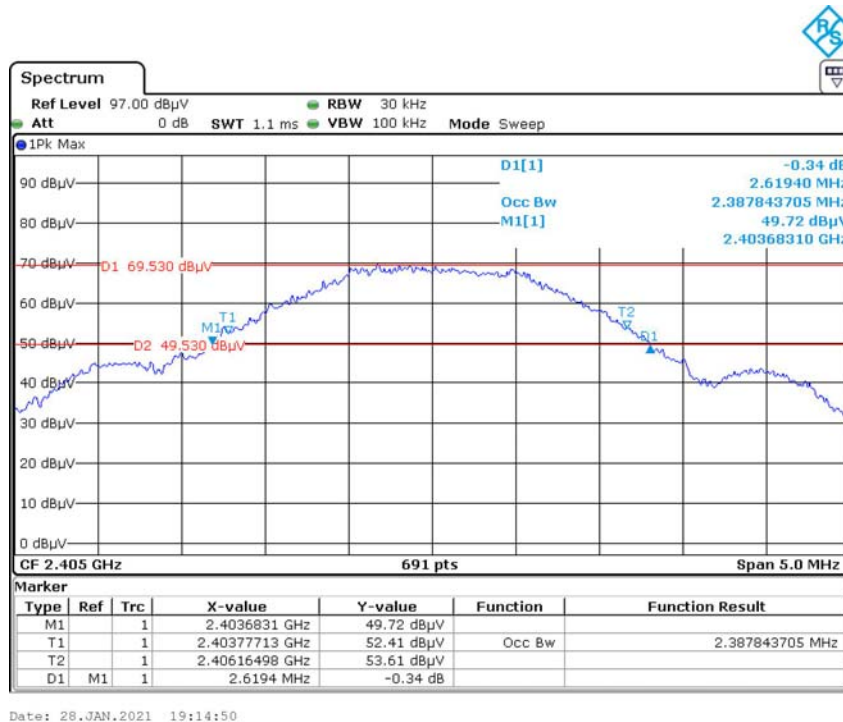

Middle Channel

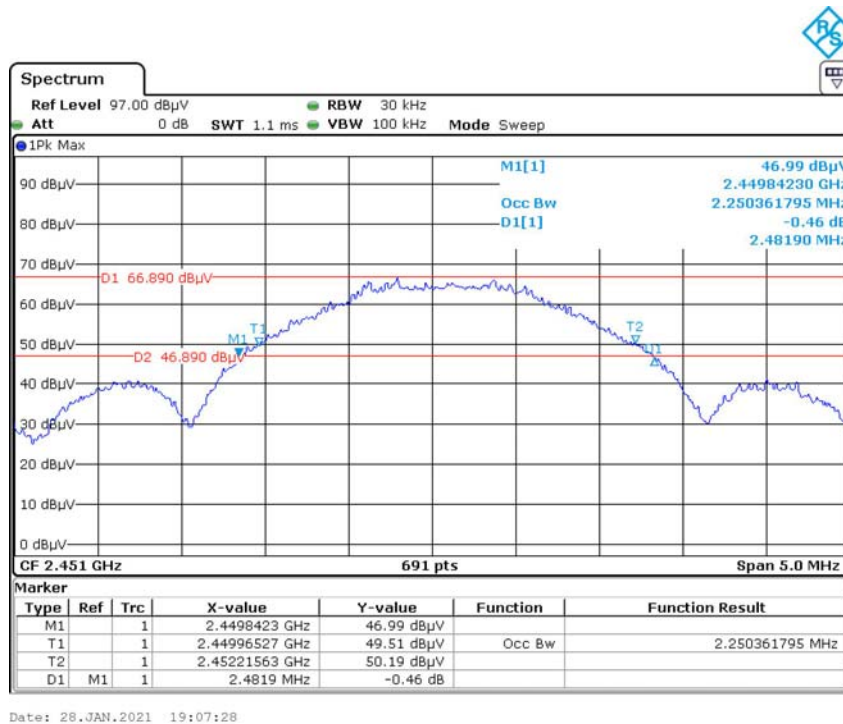

High Channel

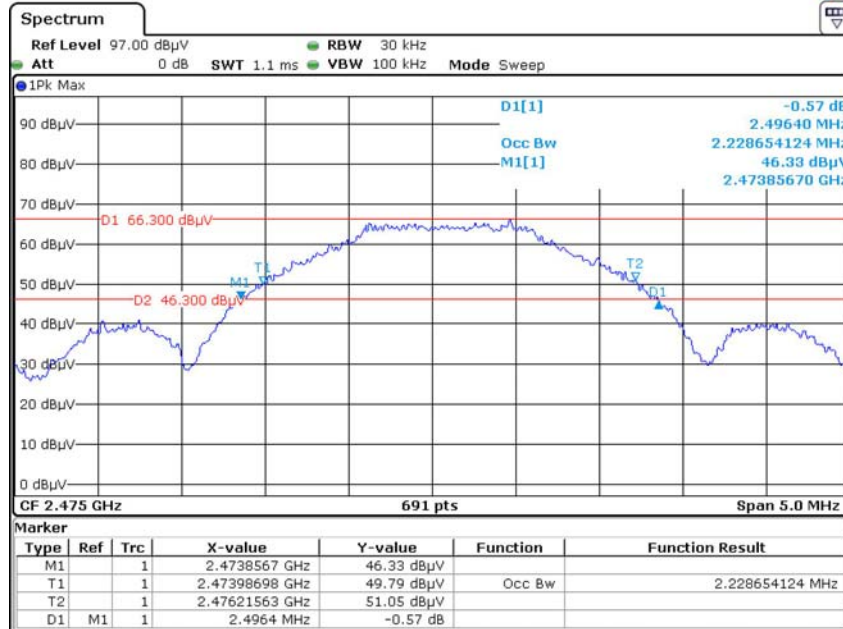

Date: 28.JAN.2021 19:12:28

***** END OF REPORT *****