



FCC TEST REPORT

FCC ID: 2AHB5-MFN

On Behalf of

Zhejiang Hanshow Technology CO.,LTD.

Electronic shelf label

Model No.: Stellar-MFN@

Prepared for : Zhejiang Hanshow Technology CO.,LTD.
Address : Bld. 33, No. 966 xiuyuan Rd., BeiKeJian Innovation Park, XiuZhou
District, Jiaxing, Zhejiang, PRC, PC 314000

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : T1881280 01
Date of Receipt : August 01, 2018
Date of Test : August 01, 2018 - August 21, 2018
Date of Report : August 21, 2018
Version Number : REV0

TABLE OF CONTENTS

Description	Page
1. Summary of Standards And Results.....	6
1.1. Description of Standards and Results	6
2. General Information	7
2.1. Description of Device (EUT).....	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details	8
2.4. Block Diagram of connection between EUT and simulators.....	8
2.5. Test Mode Description.....	8
2.6. Test Conditions	9
2.7. Test Facility	9
2.8. Measurement Uncertainty	9
2.9. Test Equipment List	10
3. Power Line Conducted Emission Test	11
3.1. Block Diagram of Test Setup.....	11
3.2. Test Limits	11
3.3. Configuration of EUT on Test	12
3.4. Operating Condition of EUT	12
3.5. Test Procedure	12
3.6. Test Results	13
4. Radiated Emission Test.....	14
4.1. Block Diagram of Test Setup.....	14
4.2. Test Limit.....	15
4.3. Configuration of EUT on Test	16
4.4. Operating Condition of EUT	16
4.5. Test Procedure	16
4.6. Test Results	17
5. Band Edge Test	33
5.1. Block Diagram of Test Setup.....	33
5.2. Test Limit.....	33
5.3. Configuration of EUT on Test	34
5.4. Operating Condition of EUT	34
5.5. Test Procedure	34
5.6. Test Results.....	36
6. Occupied bandwidth Test	41
6.1. Block Diagram of Test Setup.....	41
6.2. Test Limit.....	41
6.3. Test Procedure	41
6.4. Test Results.....	41
7. Antenna Requirement	43

7.1. Standard Requirement.....	43
7.2. Antenna Connected Construction	43
7.3. Results.....	43
8. Photograph.....	44
8.1. Photos of Radiated Emission Test (In Semi Anechoic Chamber)	44
9. Photos of The EUT	45

TEST REPORT DECLARATION



Applicant : Zhejiang Hanshow Technology CO.,LTD.
 Address : Bld. 33, No. 966 xiuyuan Rd., BeiKeJian Innovation Park, XiuZhou District, Jiaxing, Zhejiang, PRC, PC 314000
 Manufacturer : Zhejiang Hanshow Technology CO.,LTD.
 Address : Bld. 33, No. 966 xiuyuan Rd., BeiKeJian Innovation Park, XiuZhou District, Jiaxing, Zhejiang, PRC, PC 314000
 EUT Description : Electronic shelf label
 (A) Model No. : Stellar-MFN@
 (B) Trademark : Hanshow

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.249: 2017, ANSI C63.10:2013

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC Part15 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:	Reak Yang Project Engineer	 -----
Approved by (name + signature).....:	Simple Guan Project Manager	 -----
Date of issue.....:	August21, 2018	

Revision History

Revision	Issue Date	Revisions	Revised By
00	August 21, 2018	Initial released Issue	Simple Guan

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

EMISSION			
Description of Test Item	Test Requirement	Standard Paragraph	Results
Power Line Conducted Emission Test	FCC Part 15:2017	Section 15.207	N/A
Spurious Emission Test	FCC Part 15:2017	Section 15.249&15.209	P
Occupied bandwidth	FCC Part 15:2017	Section 15.215	P
Band edge Requirement	FCC Part 15:2017	Section 15.249	P
Antenna Requirement	FCC Part 15:2017	Section 15.203	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.			

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Description	: Electronic shelf label
Model Number	: Stellar-MFN@
Diff	: N/A
Trademark	: Hanshow
Test Voltage	: DC 3.6V From battery
Operation frequency	: 2402-2480MHz
Channel No.	: 157
Channel Separation	: 500KHz
Modulation type	: GFSK
Data Rate	: Downlink:500K bps Uplink:100K bps
Antenna Type	: PCB Antenna, max gain 0dBi.
Software version	: V1.0
Hardware version	: HS_EL5102_1FM_52_00
Sample Type	: Prototype production


2.2. Accessories of Device (EUT)

Accessories 1 : N/A

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or DOC
1	N/A	N/A	N/A	N/A	N/A

2.4. Block Diagram of connection between EUT and simulators



2.5. Test Mode Description

Test mode:

Mode	Channel	Frequency (MHz)
GFSK	CH1	2402
	CH80	2441
	CH157	2480

Note:

1. The test was used to control EUT work in Continuous TX mode, and select test channel, wireless mode
2. The EUT has been tested as an independent unit. And Continual Transmitting in maximum power.
3. New battery is used during all test.
4. For the relevant Conducted Measurement, the temporary antenna connector is used during the measurement. Antenna Connector Impedance: 50Ω , Cable Loss: 1.0 dB

Channel list:

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	154	2478.5
2	2402.5	79	2440.5	155	2479
3	2403	80	2441	156	2479.5
4	2403.5	81	2441.5	157	2480
...			

2.6. Test Conditions

Temperature range	21-25°C
Humidity range	40-75%
Pressure range	86-106kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd.

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

July 25, 2017 Certificated by IC

Registration Number: 12135A

2.8. Measurement Uncertainty

(95% confidence levels, k=2)


Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.74dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB(Polarize: V)
	2.57dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.16dB(Polarize: H)
	4.13dB(Polarize: V)
Uncertainty for radio frequency	5.4×10^{-8}
Uncertainty for conducted RF Power	0.37dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Equipment	Manufacturer	Model No.	Serial No.	Last cal.	Cal. Due day
Spectrum analyzer	Agilent	E4407B	MY49510055	2017.09.23	2018.09.22
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D(1201)	2016.09.30	2018.09.29
Filter	KANGMAI	ZLPF-LDC-1000-1959	1209002075	2017.09.22	2018.09.21
Filter	WAINWRIGHT	WHKX2.80/18G-12SS	SN1	2017.09.22	2018.09.21
RF Cable	Resenberger	Cable 4	N/A	2017.09.22	2018.09.21
Signal Analyzer	Agilent	N9020A	MY499100060	2017.09.23	2018.09.22
Amplifier	HP	HP8347A	2834A00455	2017.09.23	2018.09.22
Amplifier	Agilent	8449B	3008A02664	2017.09.23	2018.09.22
Filter	WAINWRIGHT	WHKX1.0G/15G-10SS	SN40	2017.09.22	2018.09.21
Test Receiver	ROHDE&SCHWARZ	ESR	1316.3003K03-102082-Wa	2017.09.23	2018.09.22
Bilog Antenna	SCHWARZBECK	VULB 9168	9168-438	2016.09.30	2018.09.29
9*6*6 anechoic chamber	CHENYU	9*6*6	N/A	2016.07.21	2020.07.20
RF Cable	Resenberger	Cable 1	N/A	2017.09.22	2018.09.21
RF Cable	Resenberger	Cable 2	N/A	2017.09.22	2018.09.21
RF Cable	Resenberger	Cable 3	N/A	2017.09.28	2018.09.27
Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2016.09.29	2018.09.28
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170294	2017.02.22	2019.02.21
Preamplifier	SCHWARZBECK	BBV9721	9721-031	2017.09.03	2018.09.02
Attenuator	HP	8494B	DC-18G	2017.10.22	2018.10.23
Spectrum analyzer	ROHDE&SCHWARZ	FSQ40	200061	2017.12.28	2018.12.27
20dB Attenuator	ICPROBING	IATS1	82347	2017.09.22	2018.09.21

3. POWER LINE CONDUCTED EMISSION TEST

3.1. Block Diagram of Test Setup

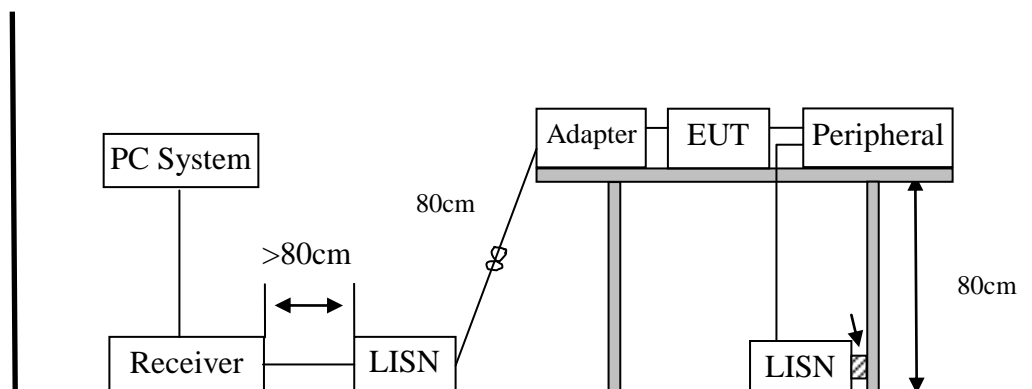

3.2. Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

- Notes:
1. Emission level=Read level + LISN factor-Preamplifier factor + Cable loss
 2. * Decreasing linearly with logarithm of frequency.
 3. The lower limit shall apply at the transition frequencies.

3.3. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 3.1.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode taking the test.

3.5. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013 on conducted Emission test.
- (2) The frequency range from 150kHz to 30MHz is checked, the bandwidth of test receiver (R&S TEST RECEIVER ESCI) is set at 9kHz.
- (3) The frequency range from 30MHz to 1000MHz was pre-scanned with a Peak detector and all final readings of measurement from Test Receiver are Quasi-Peak and Average values.
- (4) The test results are reported on Section 3.6.


3.6. Test Results

EUT	: Electronic shelf label	Test Date	: N/A
M/N	: Stellar-MFN@	Temperature	: N/A
Test Engineer	: N/A	Humidity	: N/A
Test Mode	: N/A		
Test Results	: N/A		
Note: 1. Not applicable for equipment operated with battery power supply.			


4. RADIATED EMISSION TEST

4.1. Block Diagram of Test Setup


In Semi Anechoic Chamber (3m) Test Setup Diagram for 9KHz~30MHz

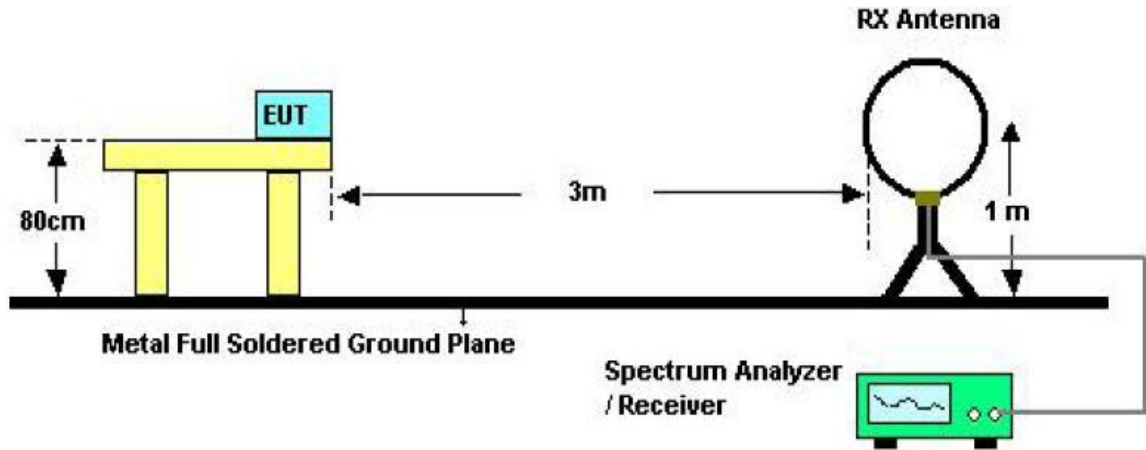

In Semi Anechoic Chamber (3m) Test Setup Diagram for 30MHz~1000MHz

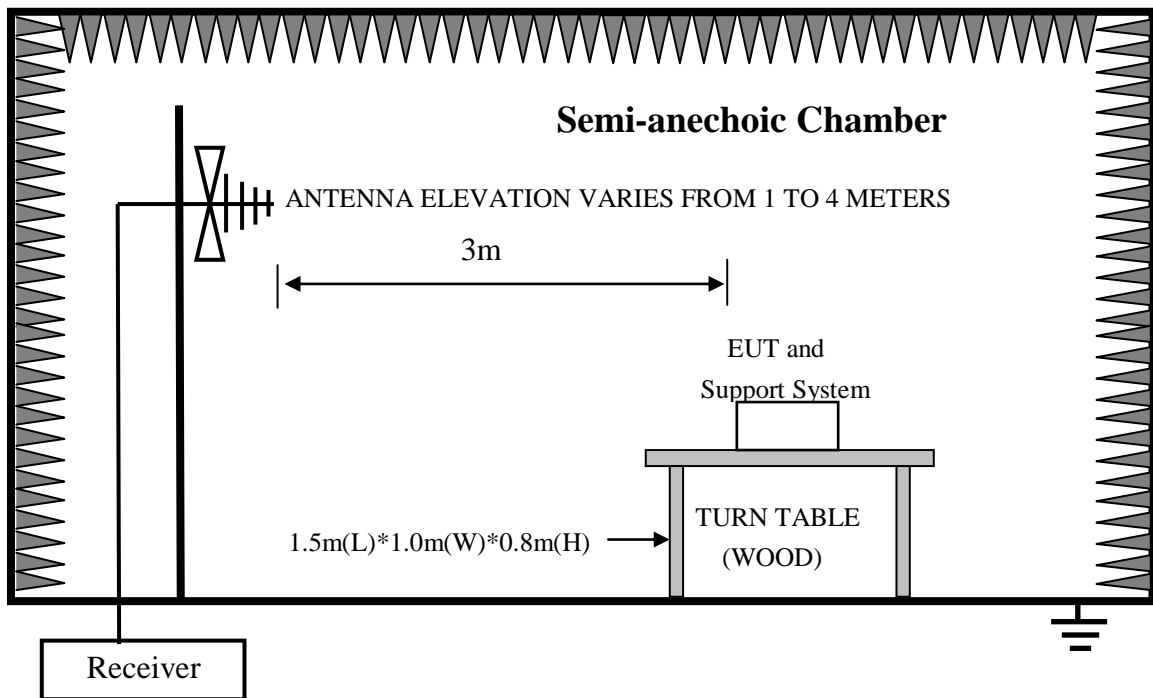

In Semi Anechoic Chamber (3m) Test Setup Diagram for Above 1GHz

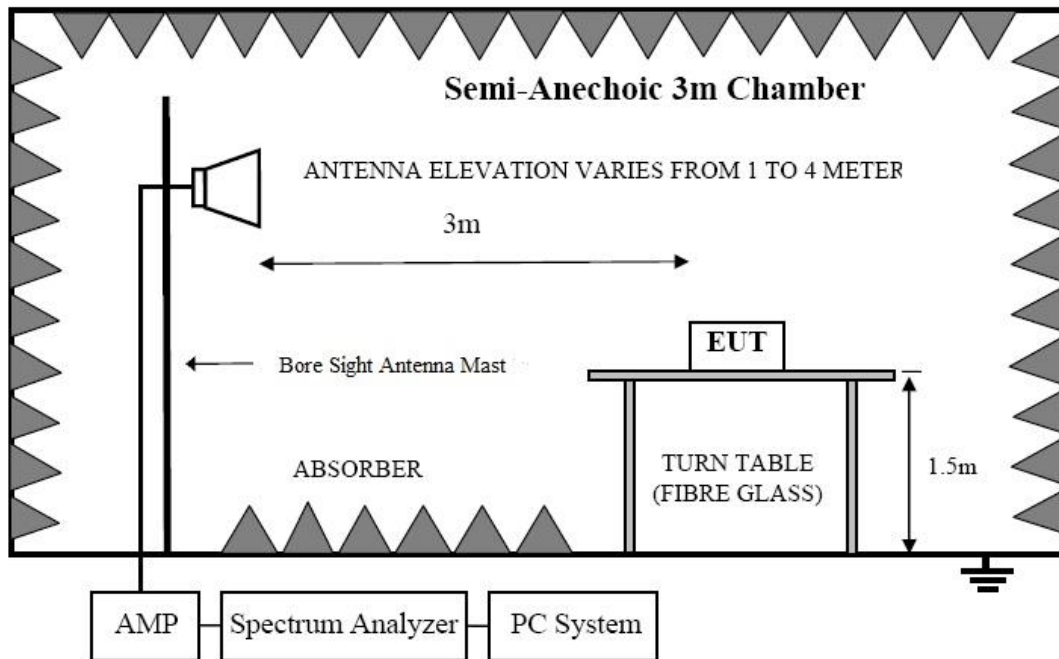

4.2. Test Limit

Frequency MHz	Distance (Meters)	Field Strengths Limits	
		uV/m	dB uV/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	----
1.705 ~ 30	30	30	29.5
30 ~ 88	3	100(3nW)	40
88 ~ 216	3	150(6.8nW)	43.5
216 ~ 960	3	200(12nW)	46
Above 960	3	500(75nW)	54
Carrier frequency	3	50000(avg)	113.97(peak) 93.97(avg)

- Notes:
1. Emission level = Read level + Antenna Factor - Preamp Factor + Cable Loss
 2. The smaller limit shall apply at the cross point between two frequency bands.
 3. Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
 4. For frequencies above 1000 MHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

4.3. Configuration of EUT on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

4.4. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 4.1.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode taking the test.

4.5. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1GHz and 150 cm above the ground plane inside a semi-anechoic chamber for above 1GHz. An antenna was located 3m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10: 2013 on Radiated Emission test.
- (2) For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- (3) Test antenna was located 4m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP

- (5) The frequency range from 9KHz to 150KHz is checked, the bandwidth of test receiver (R&S TEST RECEIVER ESR) is set at 200Hz.
The frequency range from 150KHz to 30MHz is checked, the bandwidth of test receiver (R&S TEST RECEIVER ESR) is set at 9KHz.
The frequency range from 30MHz to 1000MHz is checked, the bandwidth of test receiver (R&S TEST RECEIVER ESR) is set at 120kHz.
The frequency range from above 1GHz is checked, the bandwidth of Signal Analyzer (Signal Analyzer N9020A) is set at 1MHz.
- (6) The frequency range from 30MHz to 1000MHz was pre-scanned with a peak detector and all final readings of measurement from Test Receiver are Quasi-Peak values, the frequency range from 1GHz to 6GHz was pre-scanned with a peak detector and all final readings of measurement from Spectrum Analyzer are peak and average values checked, all measurement distance is 3m in 3m semi anechoic chamber.
- (7) Test for all x, y, z axes is performed and only the worst case of X xes was recorded in the test report.
- (8) The test results are reported on Section 4.6.

4.6. Test Results

Frequency Range : 9KHz~30MHz	
EUT : Electronic shelf label	Test Date : 2018.08.20
M/N : Stellar-MFN@	Temperature : 24°C
Test Engineer : Reak	Humidity : 56%
Test Mode : TX CH1, CH80, CH157	
Test Results : PASS	
Note:	1. Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Frequency Range : 30MHz~1000MHz	
EUT : Electronic shelf label	Test Date : 2018.08.20
M/N : Stellar-MFN@	Temperature : 24°C
Test Engineer : Reak	Humidity : 56%
Test Mode : TX CH1, CH80, CH157	
Test Results : PASS	
Note:	1. The test results are listed in next pages. 2. TX CH157 mode is worst case mode, and this report only reflected the worst mode. 3. If the limits for the measurement with the quasi-peak detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.


Site LAB
 Limit: FCC Part15 Class B Radiation
 EUT: Electronic shelf label
 M/N: Stellar-MFN@
 Mode:2480
 Note:
 Engineer Signature:

Polarization: *Vertical*
 Power:
 Distance: 3m

Temperature: 23.9
 Humidity: 46 %

Radiated Emission Measurement

File :Stellar-MFN@ Data :#11 Date: 2018/8/20 Time: 23:08:30

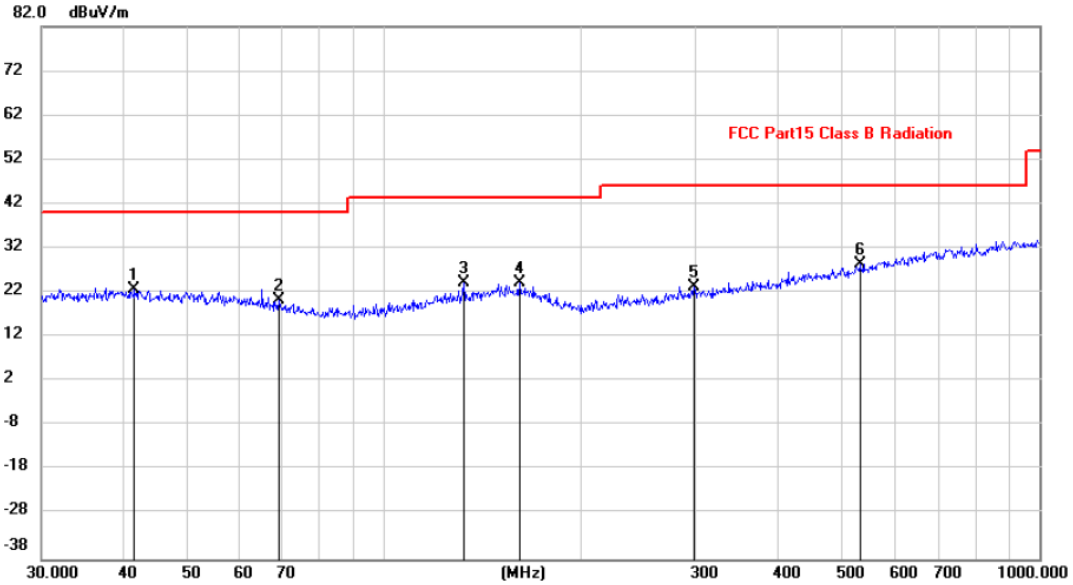

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	41.5670	8.50	14.12	22.62	40.00	-17.38	peak		
2		69.1141	9.24	11.11	20.35	40.00	-19.65	peak		
3		132.2206	10.77	13.36	24.13	43.50	-19.37	peak		
4		160.9089	9.90	14.50	24.40	43.50	-19.10	peak		
5		297.2241	10.05	13.39	23.44	46.00	-22.56	peak		
6		531.9635	10.24	18.17	28.41	46.00	-17.59	peak		

Note:1. *:Maximum data; x:Over limit; !:over margin.
 2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Site LAB
 Limit: FCC Part15 Class B Radiation
 EUT: Electronic shelf label
 M/N: Stellar-MFN@
 Mode:2480
 Note:
 Engineer Signature:

Polarization: *Horizontal*
 Power:
 Distance: 3m

Temperature: 23.9
 Humidity: 46 %

Radiated Emission Measurement

File :Stellar-MFN@ Data :#12 Date: 2018/8/20 Time: 23:09:26

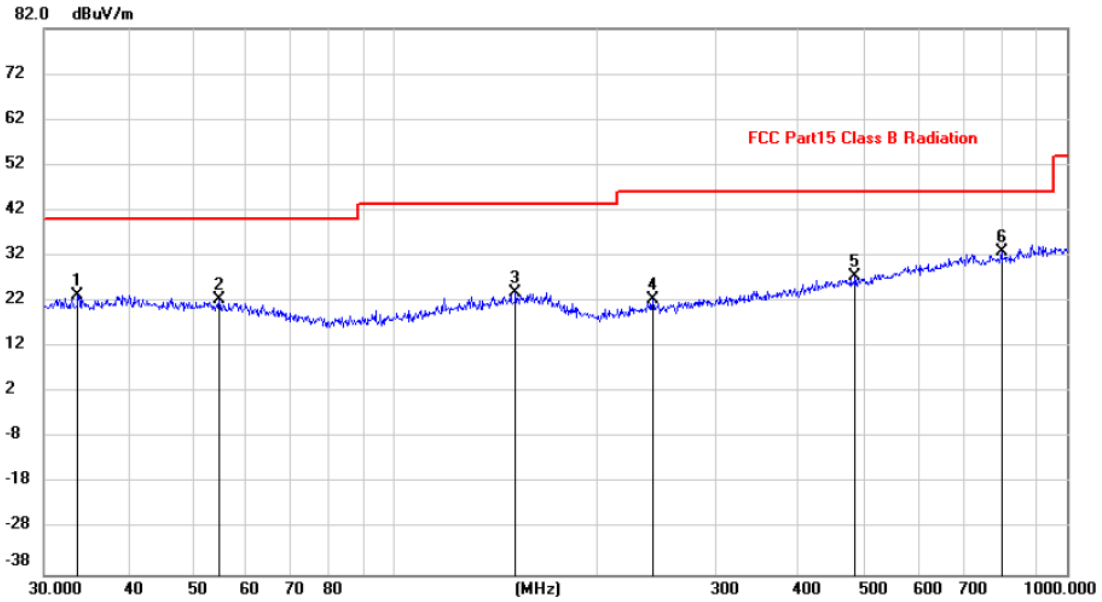

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		33.6802	9.95	13.45	23.40	40.00	-16.60			peak
2		54.6429	9.07	13.31	22.38	40.00	-17.62			peak
3		151.0666	9.54	14.56	24.10	43.50	-19.40			peak
4		241.6763	10.35	11.99	22.34	46.00	-23.66			peak
5		483.9094	10.25	17.19	27.44	46.00	-18.56			peak
6	*	798.9797	10.75	22.23	32.98	46.00	-13.02			peak

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Frequency Range	: 1GHz~25GHz		
EUT	: Electronic shelf label	Test Date	: 2018.08.20
M/N	: Stellar-MFN@	Temperature	: 24°C
Test Engineer	: Reak	Humidity	: 56%
Test Mode	: TX CH1, CH80, CH157		
Test Results	: PASS		
Note:	<p>1. The plots only show the test result from 1GHz-18GHz, means the frequency above 18GHz also complies with standard requirements and at least have 20dB margin.</p> <p>2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.</p> <p>3. Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK.</p> <p>4. Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: Avg.</p> <p>5. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.</p>		


Site LAB
 Limit: FCC Part 15_Above 1G_Peak
 EUT: Electronic shelf label
 M/N: Stellar-MFN@
 Mode:2480
 Note:
 Engineer Signature:

Polarization: *Horizontal*
 Power:
 Distance: 3m

Temperature: 23.9
 Humidity: 46 %

Radiated Emission Measurement

File :Stellar-MFN@ Data :#1 Date: 2018/8/20 Time: 21:04:10

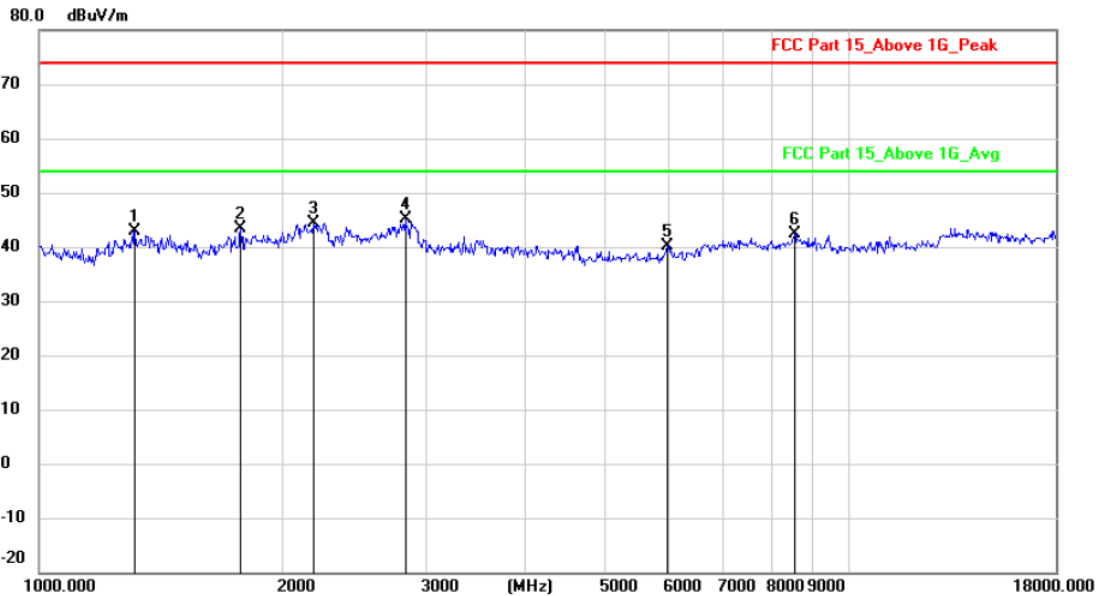

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		1312.187	50.09	-7.29	42.80	74.00	-31.20			peak
2		1772.327	49.84	-6.57	43.27	74.00	-30.73			peak
3		2188.663	47.84	-3.43	44.41	74.00	-29.59			peak
4	*	2830.728	47.85	-2.75	45.10	74.00	-28.90			peak
5		5984.304	40.99	-0.96	40.03	74.00	-33.97			peak
6		8588.607	38.40	3.89	42.29	74.00	-31.71			peak


Note:1. *:Maximum data; x:Over limit; !:over margin.
 2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Site LAB
 Limit: FCC Part 15_Above 1G_Peak
 EUT: Electronic shelf label
 M/N: Stellar-MFN@
 Mode:2480
 Note:
 Engineer Signature:

Polarization: *Vertical*
 Power:
 Distance: 3m

Temperature: 23.9
 Humidity: 46 %

Radiated Emission Measurement

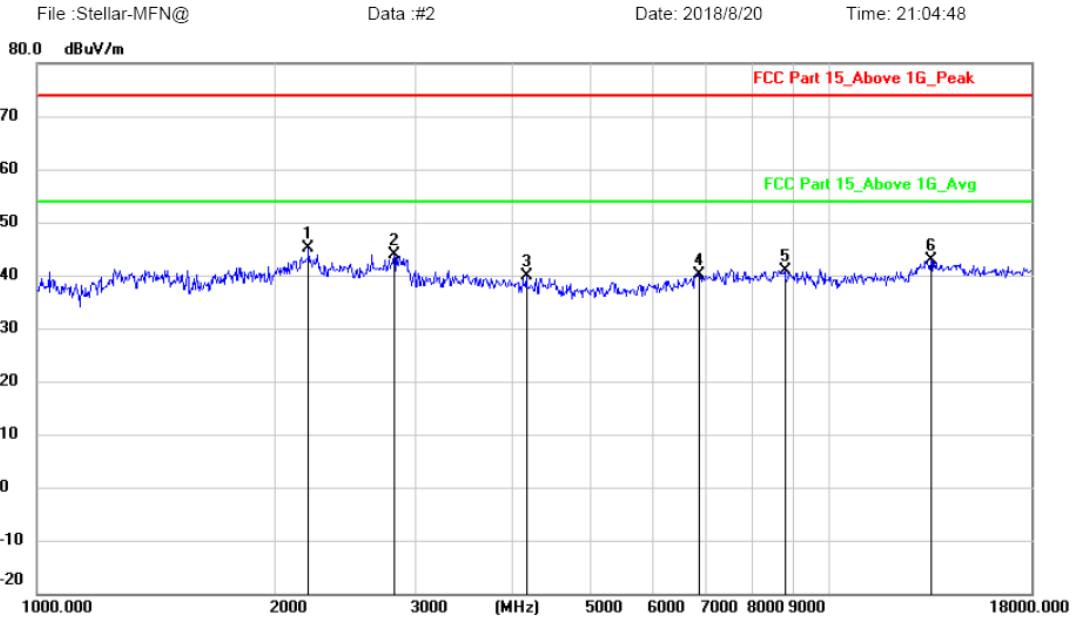

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2201.352	48.41	-3.34	45.07	74.00	-28.93			peak
2		2822.558	46.73	-2.77	43.96	74.00	-30.04			peak
3		4145.664	44.58	-4.72	39.86	74.00	-34.14			peak
4		6855.064	38.67	1.57	40.24	74.00	-33.76			peak
5		8789.515	37.13	3.87	41.00	74.00	-33.00			peak
6		13481.71	36.89	6.07	42.96	74.00	-31.04			peak

Note:1. *:Maximum data; x:Over limit; !:over margin.


2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Site LAB
 Limit: FCC Part 15_Above 1G_Peak
 EUT: Electronic shelf label
 M/N: Stellar-MFN@
 Mode:2480
 Note:
 Engineer Signature:

Polarization: *Horizontal*
 Power:
 Distance: 3m

Temperature: 23.9
 Humidity: 46 %

Radiated Emission Measurement

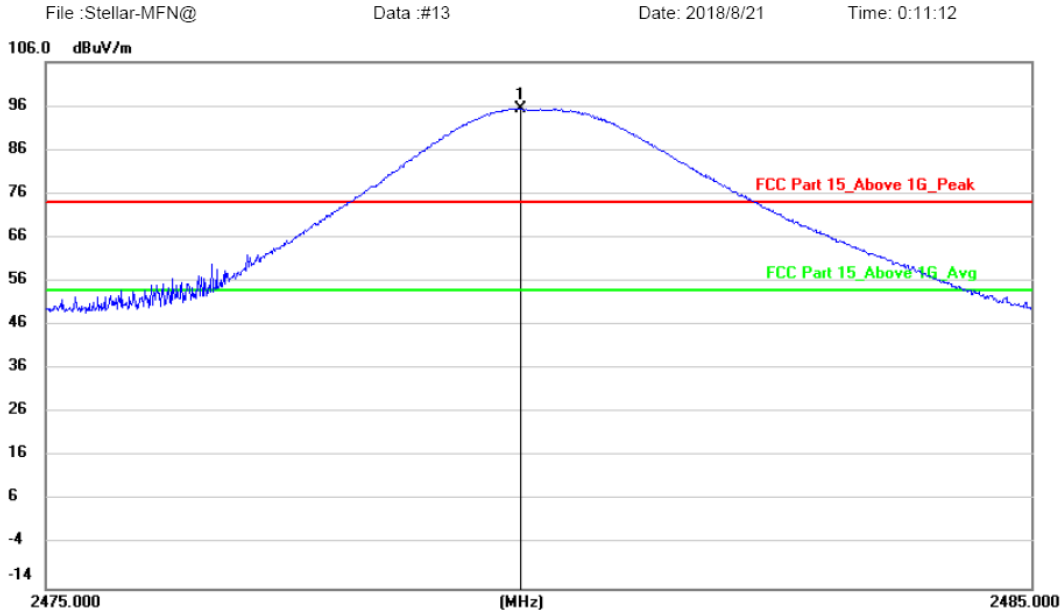

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2479.815	96.65	-3.38	93.27	74.00	21.27	peak		


Note:1. *:Maximum data; x:Over limit; !:over margin.
 2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Site LAB
 Limit: FCC Part 15_Above 1G_Peak
 EUT: Electronic shelf label
 M/N: Stellar-MFN@
 Mode:2480
 Note:
 Engineer Signature:

Polarization: **Vertical**
 Power:
 Distance: 3m

Temperature: 23.9
 Humidity: 46 %

Radiated Emission Measurement

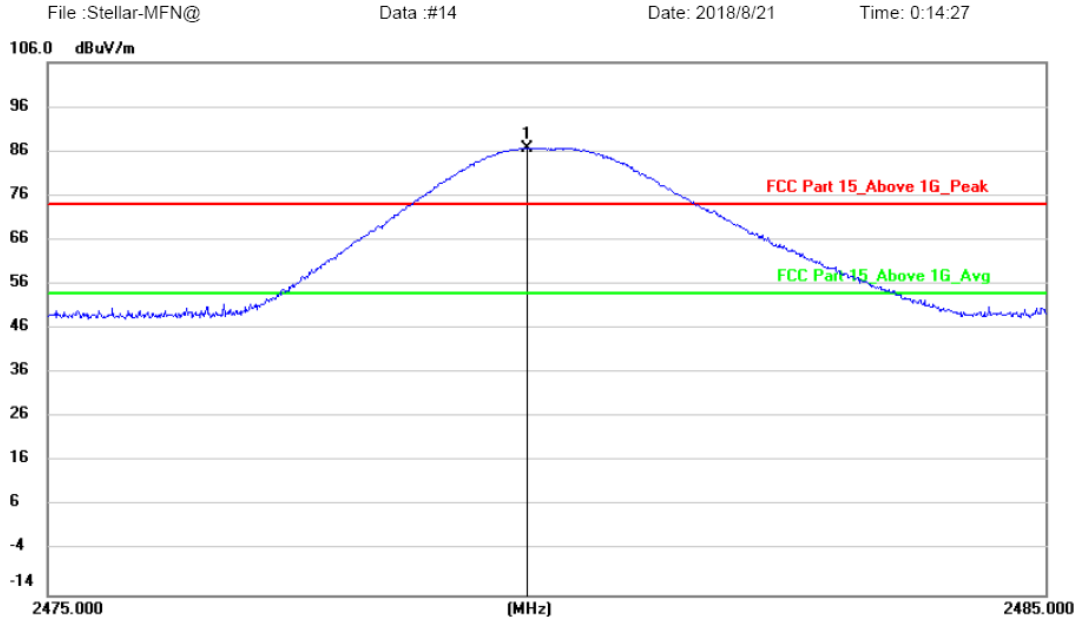

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2479.805	90.03	-3.38	86.65	74.00	12.65	peak		

Note:1. *:Maximum data; x:Over limit; l:over margin.
 2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Site LAB
 Limit: FCC Part 15_Above 1G_Peak
 EUT: Electronic shelf label
 M/N: Stellar-MFN@
 Mode:2441
 Note:
 Engineer Signature:

Polarization: *Vertical*
 Power:
 Distance: 3m

Temperature: 23.9
 Humidity: 46 %

Radiated Emission Measurement

File :Stellar-MFN@ Data :#5 Date: 2018/8/20 Time: 21:04:59

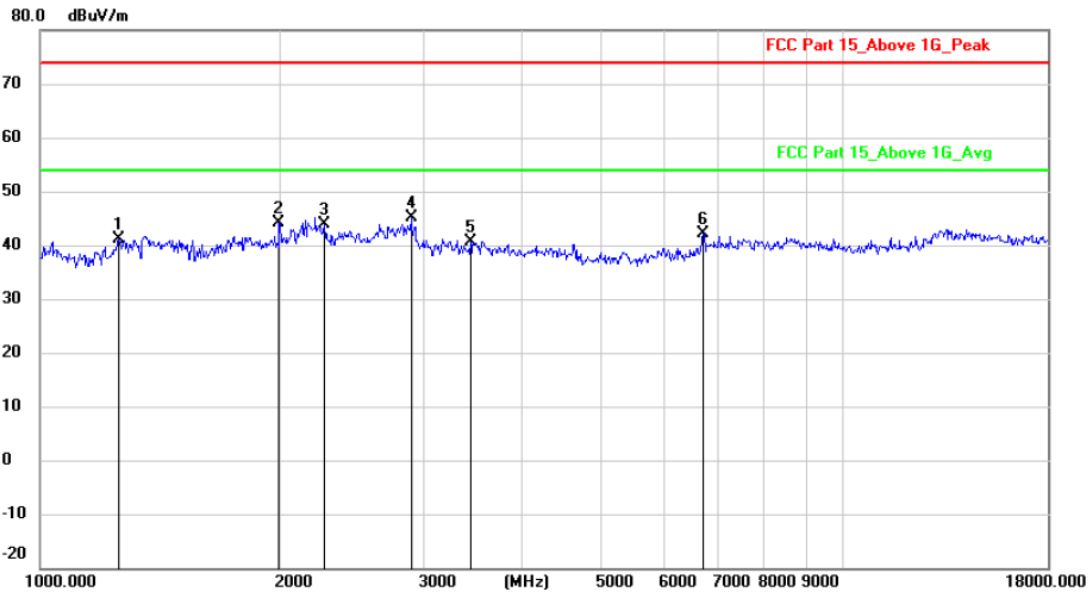

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	1252.885	48.88	-7.76	41.12	74.00	-32.88	peak	
2	1989.550	49.60	-5.50	44.10	74.00	-29.90	peak	
3	2259.367	47.31	-3.33	43.98	74.00	-30.02	peak	
4 *	2896.945	47.72	-2.61	45.11	74.00	-28.89	peak	
5	3435.590	47.41	-6.81	40.60	74.00	-33.40	peak	
6	6717.761	41.09	1.05	42.14	74.00	-31.86	peak	

Note:1. *:Maximum data; x:Over limit; !:over margin.
 2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Site LAB
 Limit: FCC Part 15_Above 1G_Peak
 EUT: Electronic shelf label
 M/N: Stellar-MFN@
 Mode:2441
 Note:
 Engineer Signature:

Polarization: *Horizontal*
 Power:
 Distance: 3m

Temperature: 23.9
 Humidity: 46 %

Radiated Emission Measurement

File :Stellar-MFN@ Data :#6 Date: 2018/8/20 Time: 21:06:09

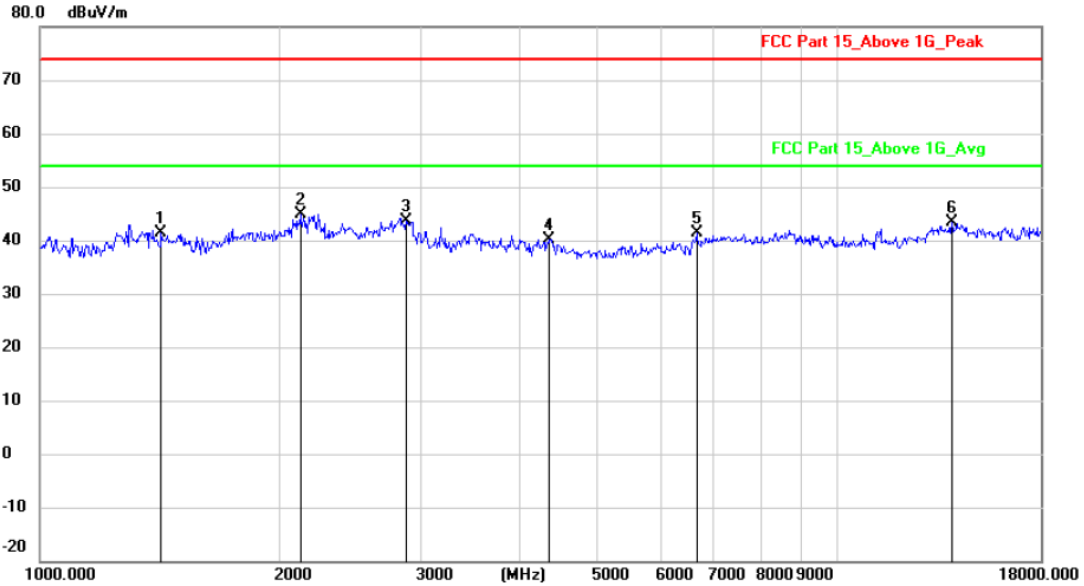

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		1422.798	48.32	-6.99	41.33	74.00	-32.67			peak
2	*	2120.171	48.73	-3.96	44.77	74.00	-29.23			peak
3		2880.247	46.26	-2.65	43.61	74.00	-30.39			peak
4		4367.058	44.45	-4.21	40.24	74.00	-33.76			peak
5		6659.763	40.54	0.93	41.47	74.00	-32.53			peak
6		13917.24	36.45	6.86	43.31	74.00	-30.69			peak

Note:1. *:Maximum data; x:Over limit; !:over margin.


2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Site LAB
 Limit: FCC Part 15_Above 1G_Peak
 EUT: Electronic shelf label
 M/N: Stellar-MFN@
 Mode:2441
 Note:
 Engineer Signature:

Polarization: *Horizontal*
 Power:
 Distance: 3m

Temperature: 23.9
 Humidity: 46 %

Radiated Emission Measurement

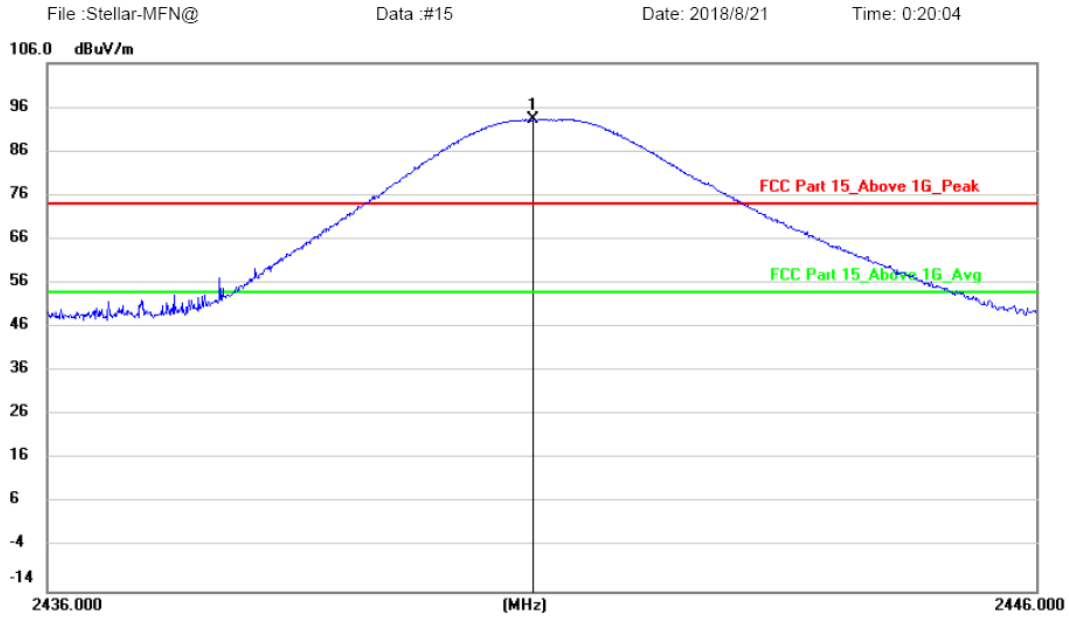

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2440.905	96.76	-3.40	93.36	74.00	19.36	peak		

Note:1. *:Maximum data; x:Over limit; !:over margin.
 2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Site LAB
 Limit: FCC Part 15_Above 1G_Peak
 EUT: Electronic shelf label
 M/N: Stellar-MFN@
 Mode:2441
 Note:
 Engineer Signature:

Polarization: *Vertical*
 Power:
 Distance: 3m

Temperature: 23.9
 Humidity: 46 %

Radiated Emission Measurement

File :Stellar-MFN@ Data :#16 Date: 2018/8/21 Time: 0:20:49

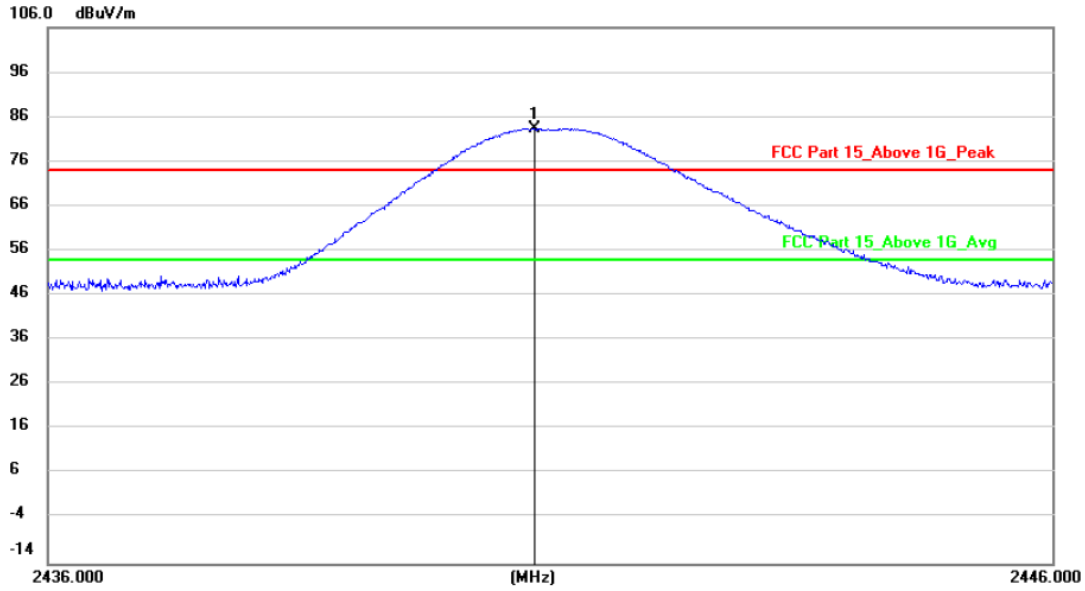

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2440.845	86.76	-3.40	83.36	74.00	9.36			peak


Note:1. *:Maximum data; x:Over limit; !:over margin.
 2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Site LAB
 Limit: FCC Part 15_Above 1G_Peak
 EUT: Electronic shelf label
 M/N: Stellar-MFN@
 Mode:2402
 Note:
 Engineer Signature:

Polarization: *Vertical*
 Power:
 Distance: 3m

Temperature: 23.9
 Humidity: 46 %

Radiated Emission Measurement

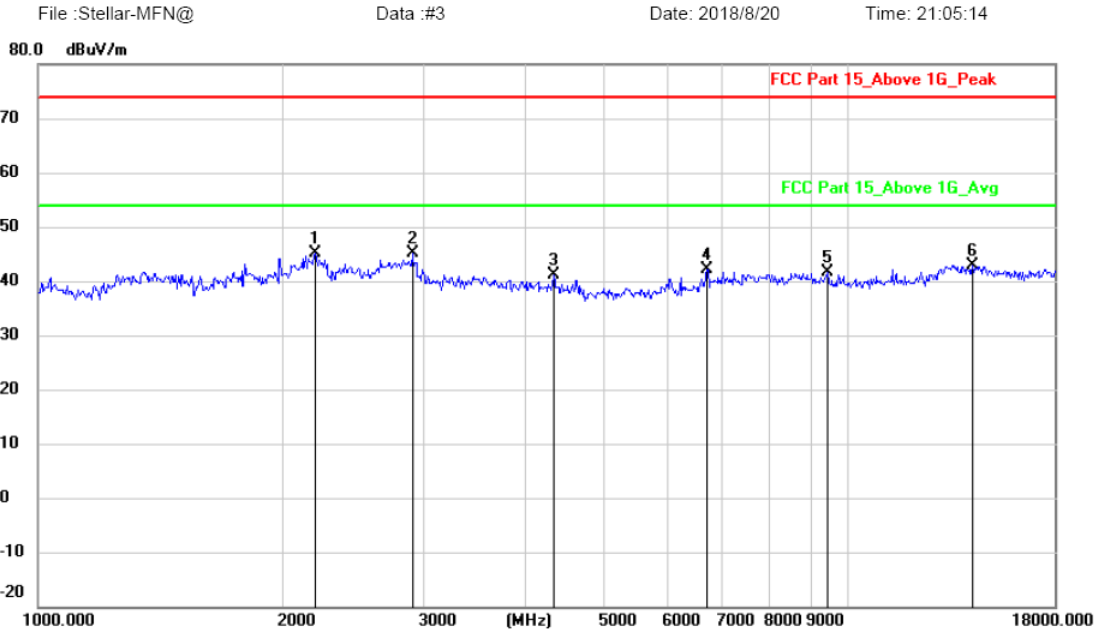

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2201.352	48.41	-3.34	45.07	74.00	-28.93			peak
2	*	2896.945	47.72	-2.61	45.11	74.00	-28.89			peak
3		4329.355	45.50	-4.32	41.18	74.00	-32.82			peak
4		6717.761	41.09	1.05	42.14	74.00	-31.86			peak
5		9448.149	38.32	3.39	41.71	74.00	-32.29			peak
6		14284.02	35.68	7.30	42.98	74.00	-31.02			peak

Note:1. *:Maximum data; x:Over limit; !:over margin.
 2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Site LAB
 Limit: FCC Part 15_Above 1G_Peak
 EUT: Electronic shelf label
 M/N: Stellar-MFN@
 Mode:2402
 Note:
 Engineer Signature:

Polarization: *Horizontal*
 Power:
 Distance: 3m

Temperature: 23.9
 Humidity: 46 %

Radiated Emission Measurement

File :Stellar-MFN@ Data :#4 Date: 2018/8/20 Time: 21:05:33

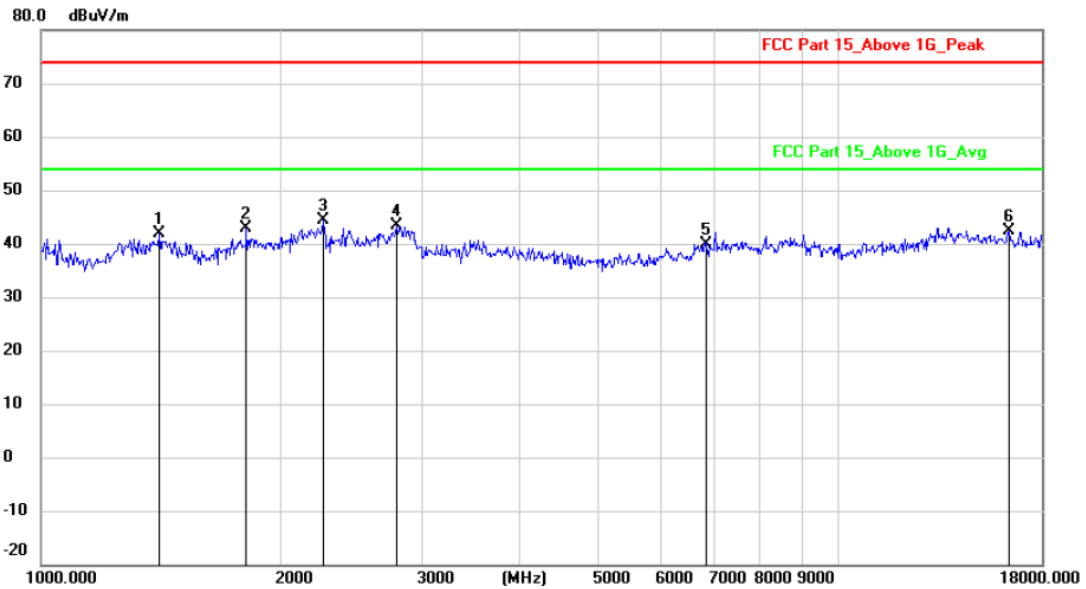

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		1410.514	48.84	-7.01	41.83	74.00	-32.17			peak
2		1813.786	49.39	-6.40	42.99	74.00	-31.01			peak
3	*	2259.367	47.62	-3.33	44.29	74.00	-29.71			peak
4		2798.189	46.09	-2.82	43.27	74.00	-30.73			peak
5		6815.551	38.68	1.32	40.00	74.00	-34.00			peak
6		16409.81	38.02	4.37	42.39	74.00	-31.61			peak


Note:1. *:Maximum data; x:Over limit; !:over margin.
 2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Site LAB
 Limit: FCC Part 15_Above 1G_Peak
 EUT: Electronic shelf label
 M/N: Stellar-MFN@
 Mode:2402
 Note:
 Engineer Signature:

Polarization: *Horizontal*
 Power:
 Distance: 3m

Temperature: 23.9
 Humidity: 46 %

Radiated Emission Measurement

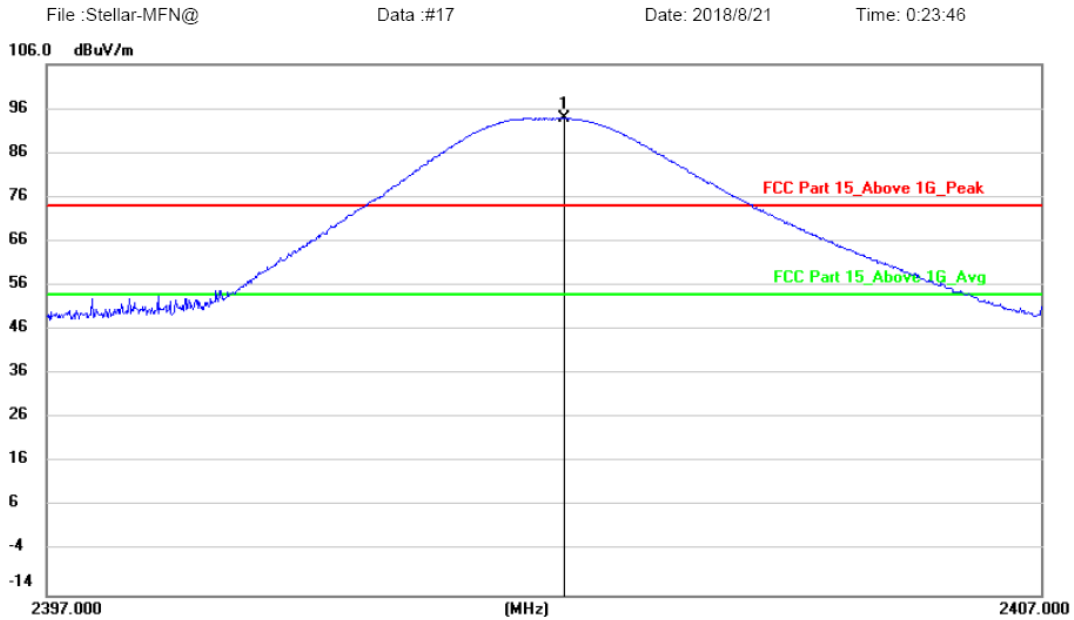

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2402.195	97.19	-3.41	93.78	74.00	19.78			peak

Note:1. *:Maximum data; x:Over limit; !:over margin.


2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Site LAB
 Limit: FCC Part 15_Above 1G_Peak
 EUT: Electronic shelf label
 M/N: Stellar-MFN@
 Mode:2402
 Note:
 Engineer Signature:

Polarization: *Vertical*
 Power:
 Distance: 3m

Temperature: 23.9
 Humidity: 46 %

Radiated Emission Measurement

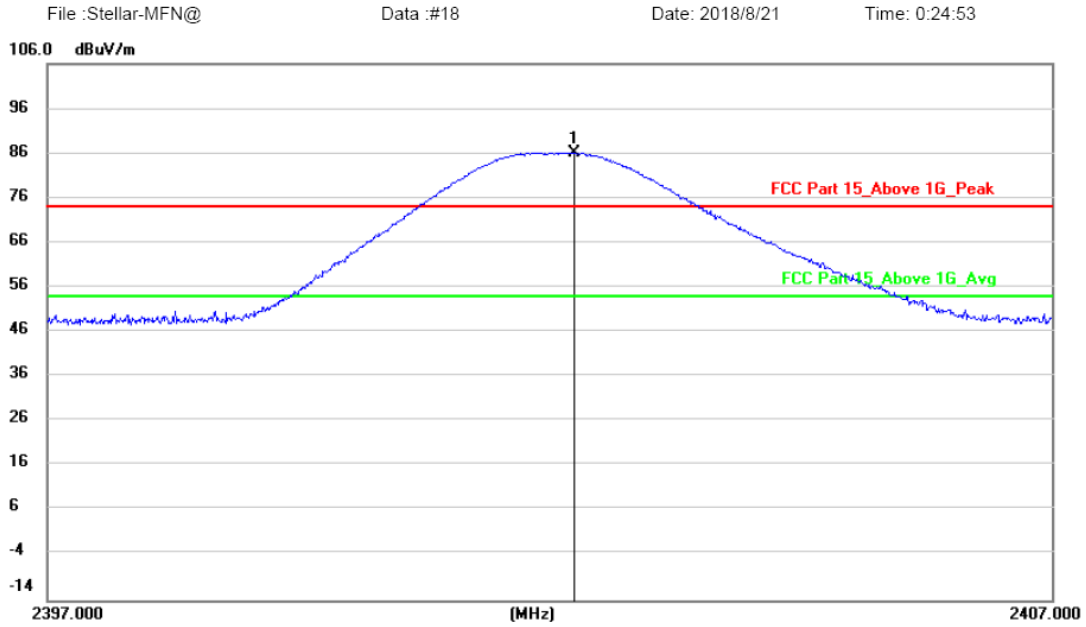


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2402.245	89.56	-3.41	86.15	74.00	12.15	peak		

Note:1. *:Maximum data; x:Over limit; !:over margin.
 2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

5. BAND EDGE TEST

5.1. Block Diagram of Test Setup

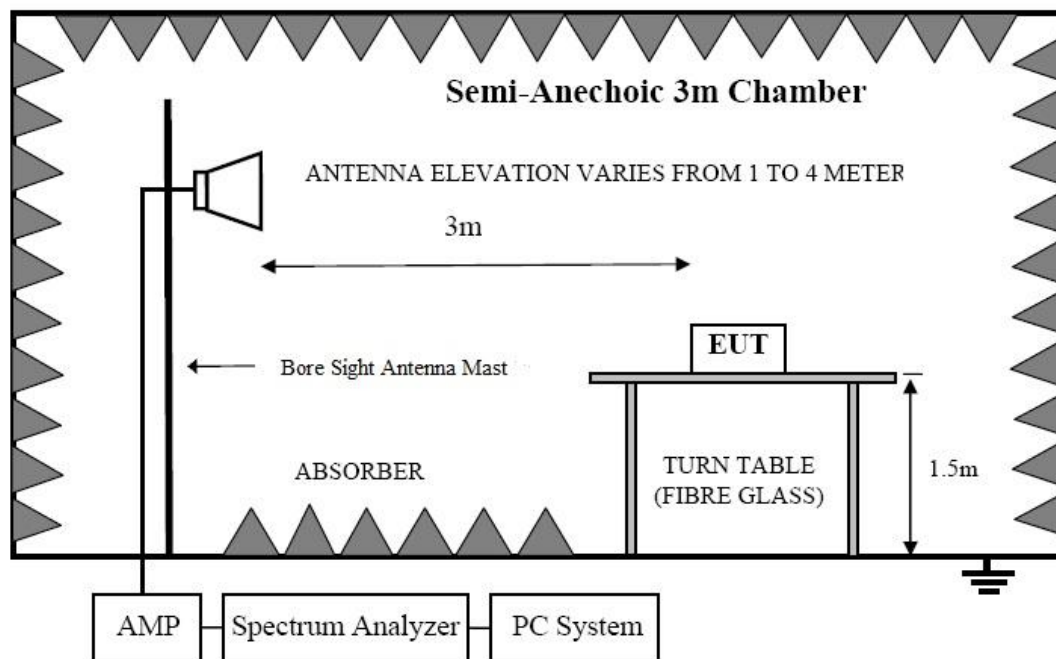

5.2. Test Limit

Please refer section 15.249 and section 15.205.

249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in section 15.209, whichever is the lesser attenuation.

249(e) As shown in section 15.35(b), for frequencies above 1000MHz, the above field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

5.3. Configuration of EUT on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

5.4. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 5.1.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode taking the test.

5.5. Test Procedure

- (1) The EUT was placed on a non-metallic table, 150 cm above the ground plane inside a semi-anechoic chamber. An antenna was located 3m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10: 2013 on Radiated Emission test.
- (2) For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- (3) Test antenna was located 4m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions

- (5) The frequency range from above 1GHz is checked, the bandwidth of Signal Analyzer (Signal Analyzer N9020A) is set at 1MHz.
- (6) The frequency range from 1GHz to 6GHz was pre-scanned with a peak detector and all final readings of measurement from Spectrum Analyzer are peak and average values checked, all measurement distance is 3m in 3m semi anechoic chamber.
- (7) Test for all x, y, z axes is performed and only the worst case of X xes was recorded in the test report.
- (8) The test results are reported on Section 5.6.

5.6. Test Results

EUT	: Electronic shelf label	Test Date	: 2018.08.20
M/N	: Stellar-MFN@	Temperature	: 24°C
Test Engineer	: Reak	Humidity	: 56%
Test Mode	: TX 2402MHz, TX 2480MHz		
Test Results	: PASS		
Note:	<p>1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.</p> <p>2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.</p> <p>3. Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK.</p> <p>4. Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: Avg.</p> <p>5. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.</p>		


Site LAB
 Limit: FCC Part 15_Above 1G_Peak
 EUT: Electronic shelf label
 M/N: Stellar-MFN@
 Mode:2402
 Note:
 Engineer Signature:

Polarization: *Vertical*
 Power:
 Distance: 3m

Temperature: 23.9
 Humidity: 46 %

Radiated Emission Measurement

File :Stellar-MFN@ Data :#19 Date: 2018/8/21 Time: 0:29:46

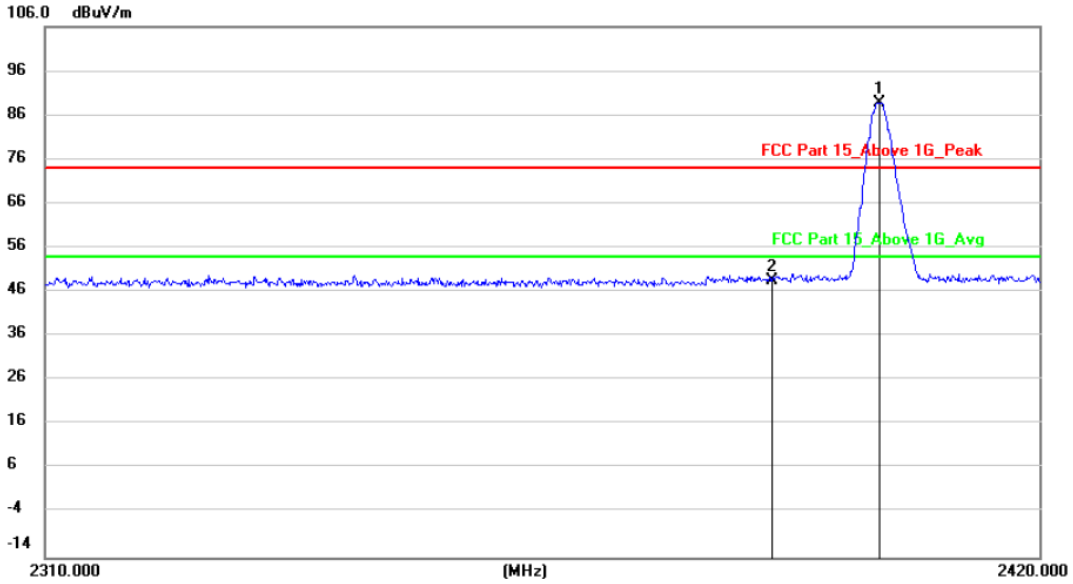

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2402.130	92.30	-3.41	88.89	74.00	14.89	peak		
2		2390.000	51.96	-3.40	48.56	74.00	-25.44	peak		

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Site LAB

Polarization: *Horizontal*

Temperature: 23.9

Limit: FCC Part 15_Above 1G_Peak

Power:

Humidity: 46 %

EUT: Electronic shelf label

Distance: 3m

M/N: Stellar-MFN@

Mode:2402

Note:

Engineer Signature:


Radiated Emission Measurement

File :Stellar-MFN@

Data :#20

Date: 2018/8/21

Time: 0:30:44

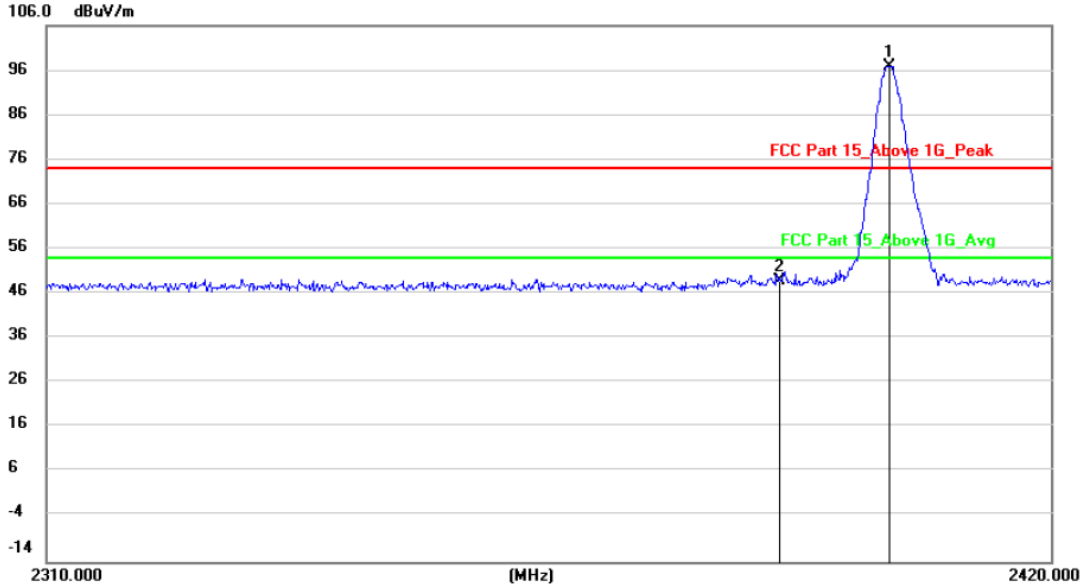

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	2402.130	96.36	-3.41	92.95	74.00	22.95	peak			
2		2390.000	52.16	-3.40	48.76	74.00	-25.24	peak			


Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Site LAB	Polarization: <i>Horizontal</i>	Temperature: 23.9
Limit: FCC Part 15_Above 1G_Peak	Power:	Humidity: 46 %
EUT: Electronic shelf label	Distance: 3m	
M/N: Stellar-MFN@		
Mode:2480		
Note:		
Engineer Signature:		

Radiated Emission Measurement

File :Stellar-MFN@ Data :#21 Date: 2018/8/21 Time: 0:32:58

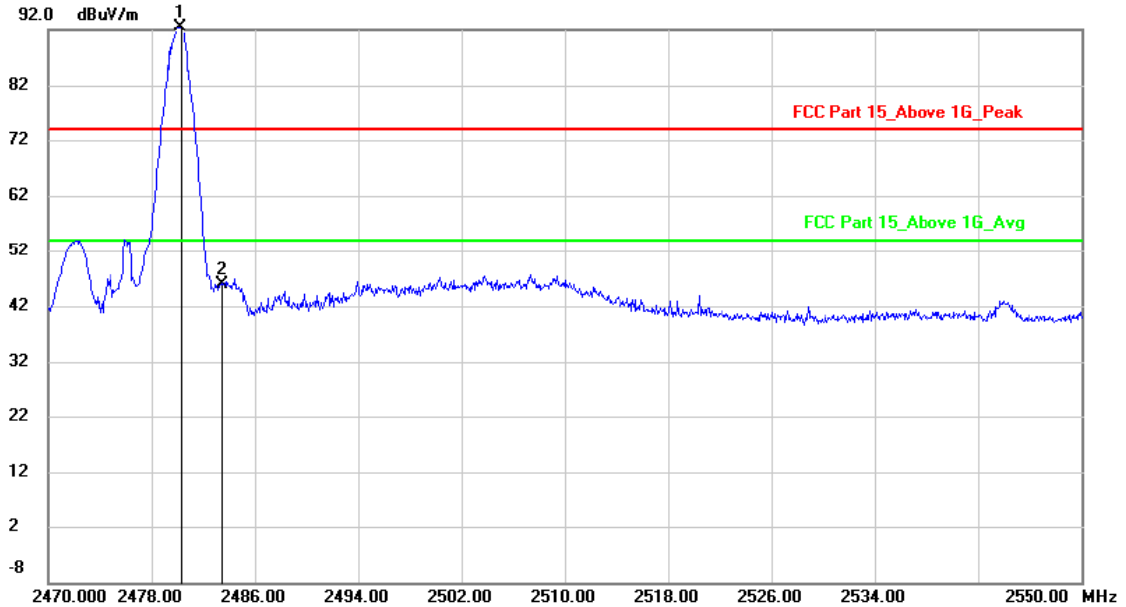

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2480.320	94.85	-3.38	91.47	74.00	17.47			peak
2		2483.500	49.23	-3.38	45.85	74.00	-28.15			peak

Note: 1. *:Maximum data; x:Over limit; !:over margin.
 2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Site LAB
 Limit: FCC Part 15_Above 1G_Peak
 EUT: Electronic shelf label
 M/N: Stellar-MFN@
 Mode:2480
 Note:
 Engineer Signature:

Polarization: *Vertical*
 Power:
 Distance: 3m

Temperature: 23.9
 Humidity: 46 %

Radiated Emission Measurement

File :Stellar-MFN@ Data :#22 Date: 2018/8/21 Time: 0:34:52

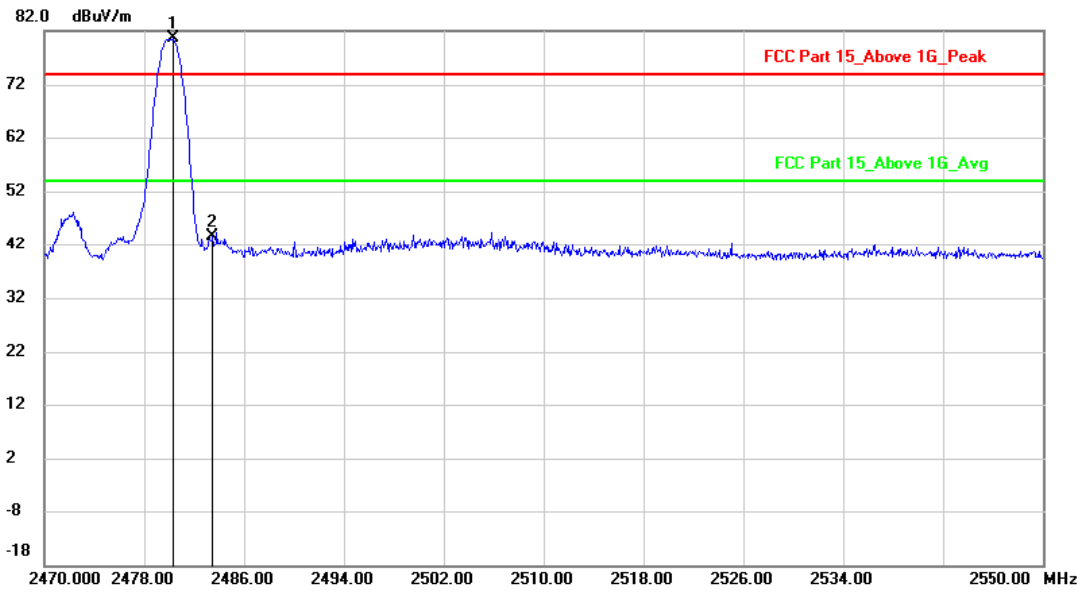


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	2480.240	83.90	-3.38	80.52	74.00	6.52			peak	
2		2483.500	47.00	-3.38	43.62	74.00	-30.38			peak	

Note:1. *:Maximum data; x:Over limit; !:over margin.
 2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

6. OCCUPIED BANDWIDTH TEST

6.1. Block Diagram of Test Setup



6.2. Test Limit

Please refer section 15.249 and section 15.205.


6.3. Test Procedure

- (1) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.
- (2) The test receiver RBW set 30KHz, VBW set 100KHz, Sweep time set auto.


6.4. Test Results

EUT	: Electronic shelf label	Test Date	: 2018.08.04	
M/N	: Stellar-MFN@	Temperature	: 24°C	
Test Engineer	: Reak	Humidity	: 56%	
Test Mode	: TX 2402MHz, TX 2441MHz, TX 2480MHz			
Test Results	: PASS			
Mode	Frequency MHz	20dB Bandwidth (KHz)	99% Bandwidth (KHz)	Limit (kHz)
GFSK	2402	551.5	520.8	/
GFSK	2441	583.1	540.96	/
GFSK	2480	551.6	524.96	/
Note: 1. The test results are listed in next pages.				


Frequency: 2402MHz

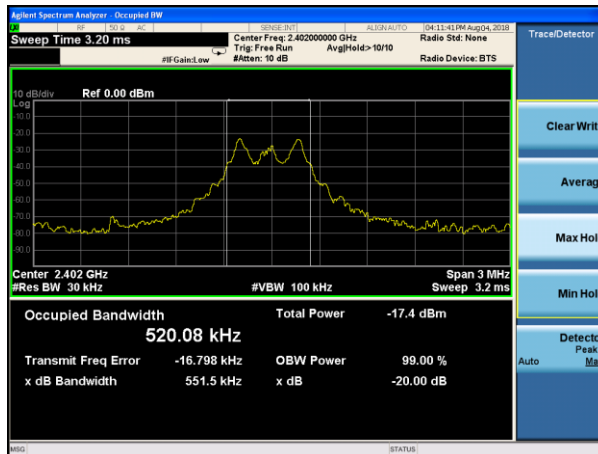

Frequency: 2441MHz

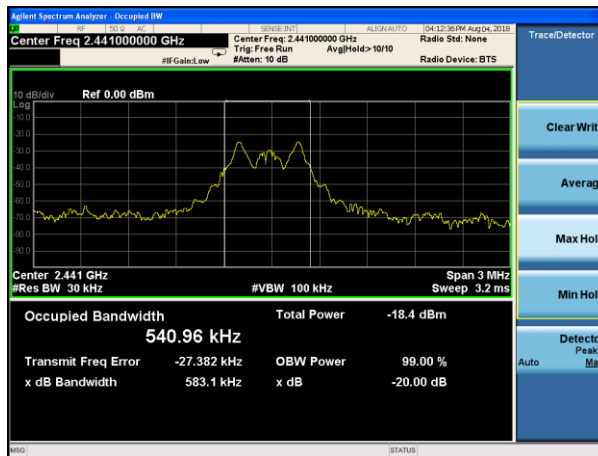

Frequency: 2480MHz

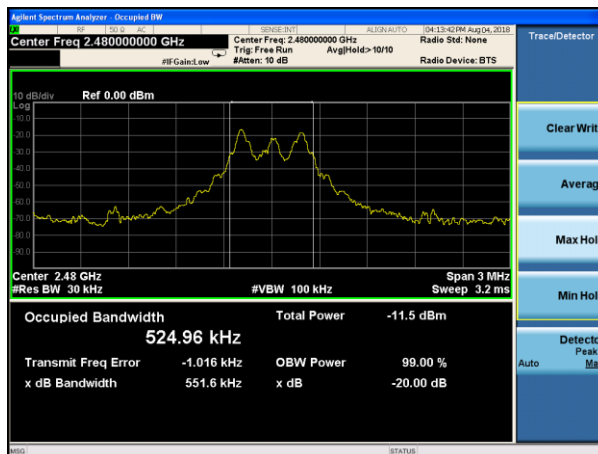

7. ANTENNA REQUIREMENT

7.1. Standard Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

7.2. Antenna Connected Construction


The directional gains of antenna used for transmitting is 0dBi, and the antenna is PCB antenna no consideration of replacement. Please see EUT photo for details.

7.3. Results

The EUT antenna is PCB Antenna. It complies with the standard requirement.



8. PHOTOGRAPH



8.1.Photos of Radiated Emission Test (In Semi Anechoic Chamber)

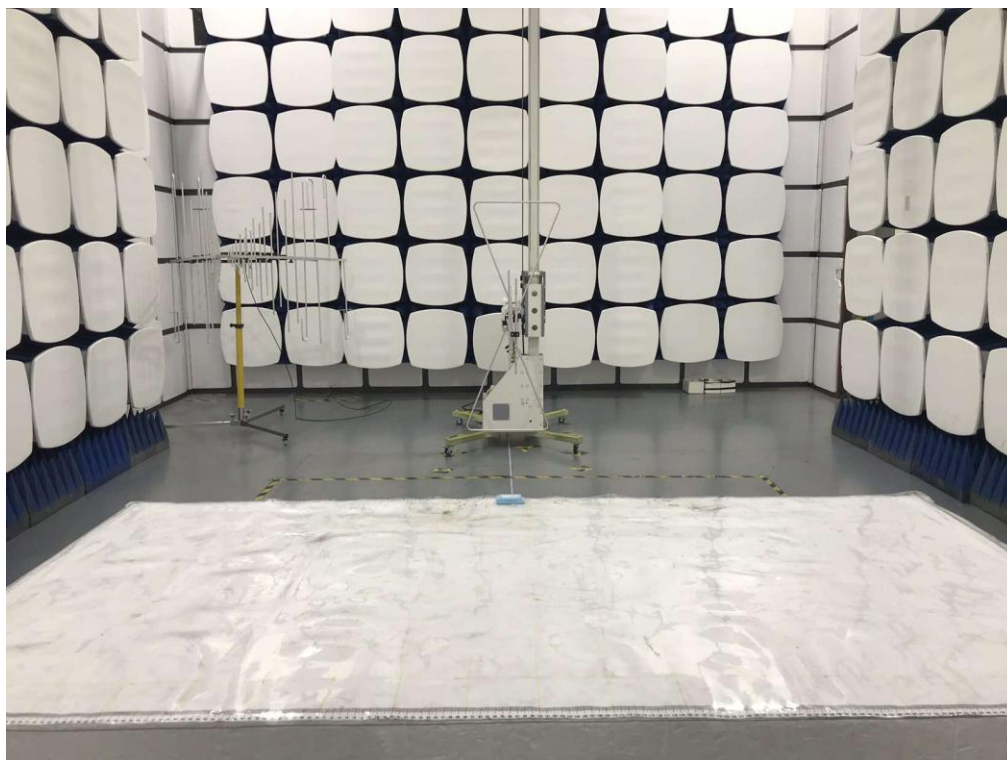



9. PHOTOS OF THE EUT




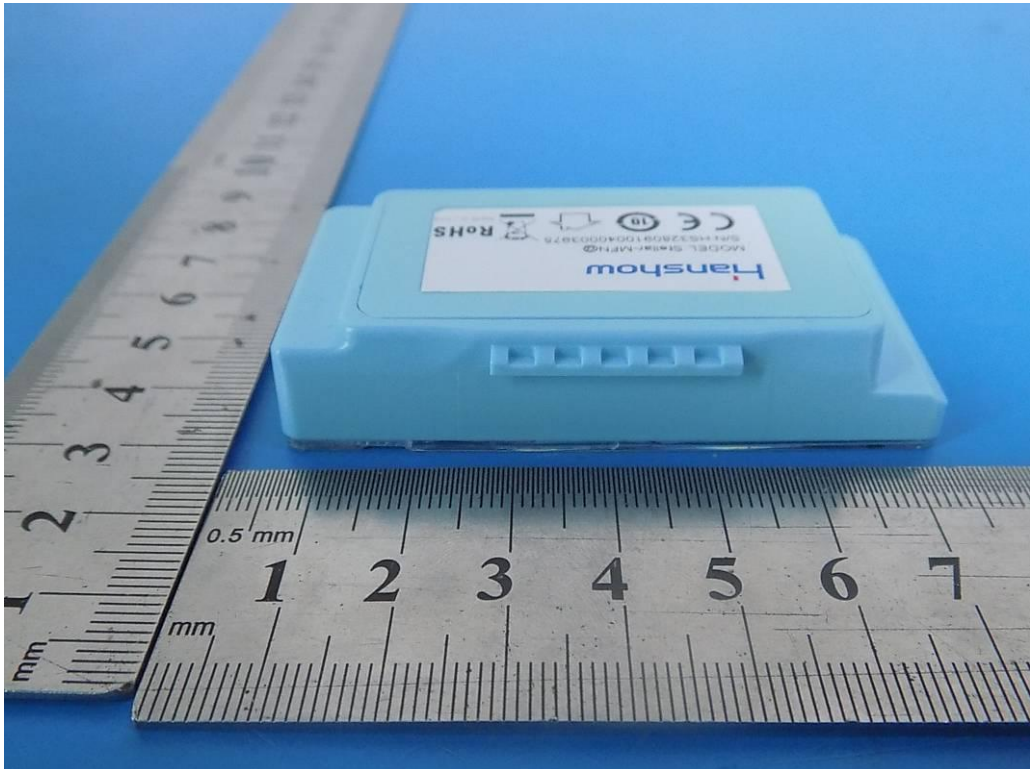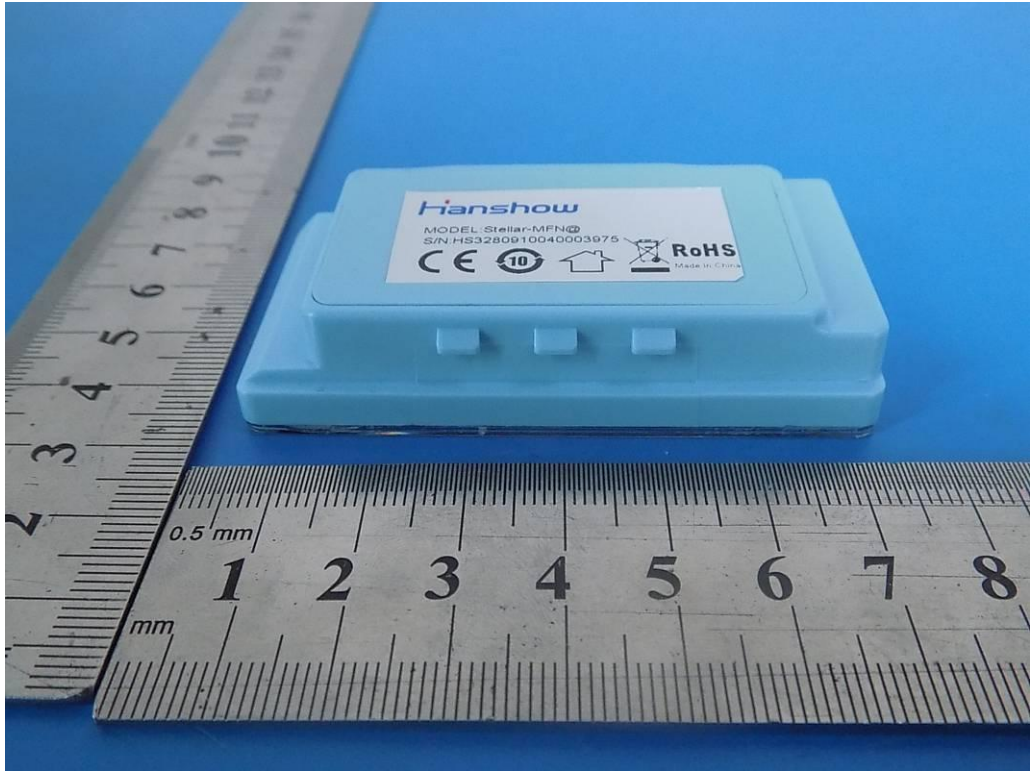

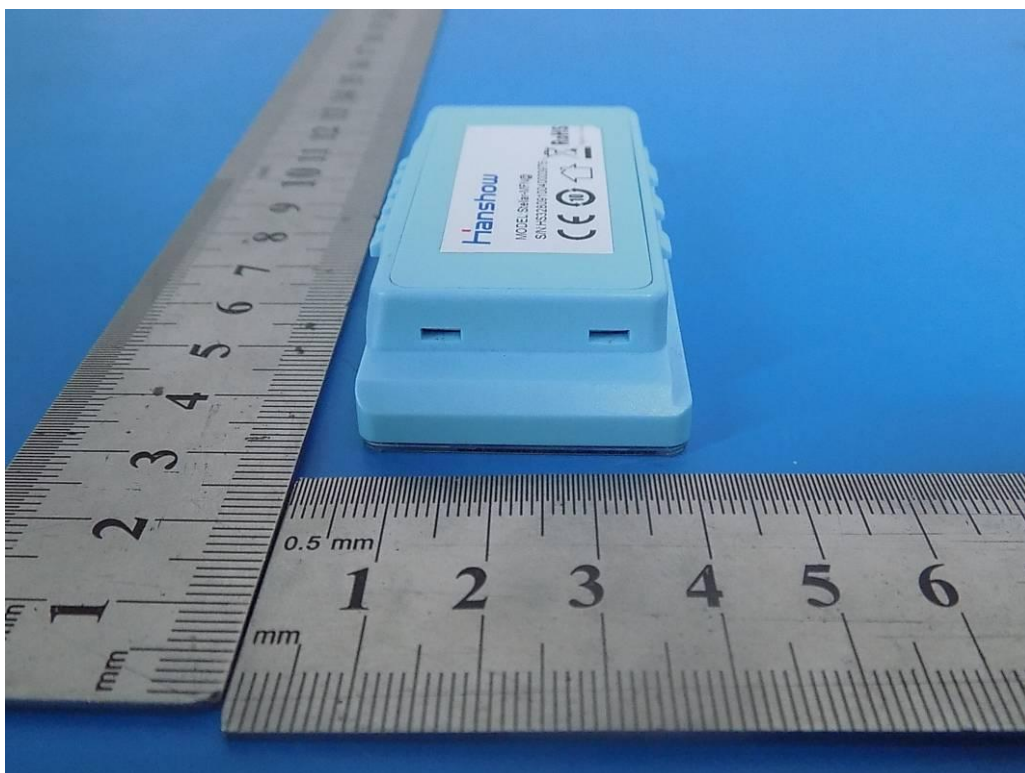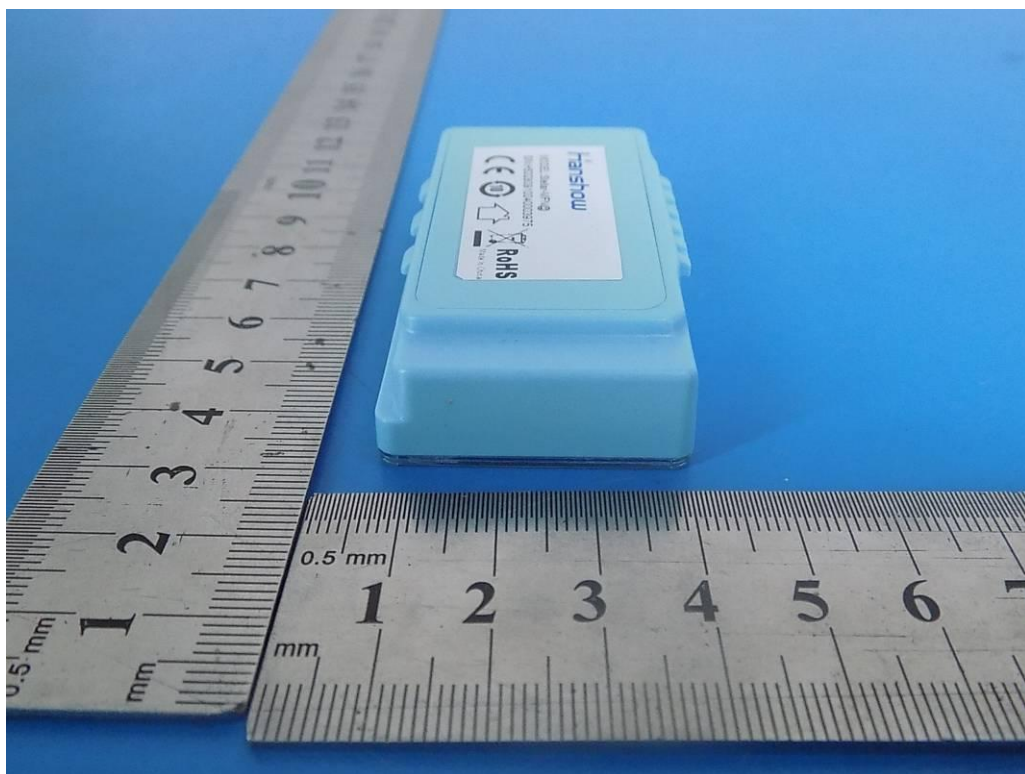

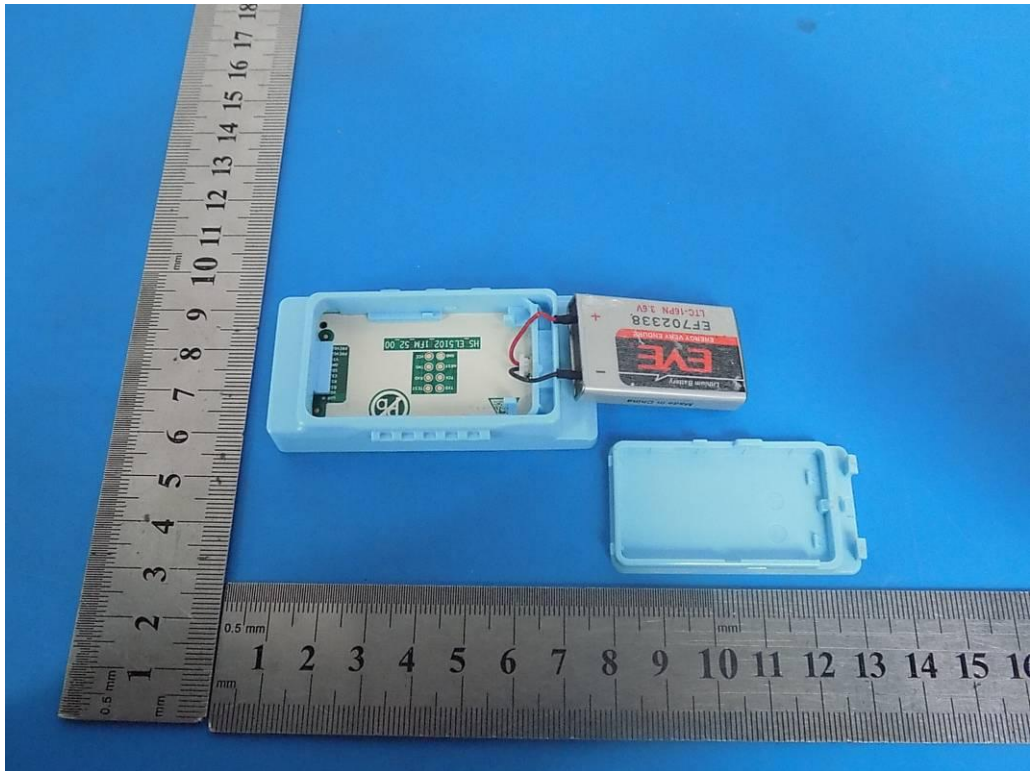

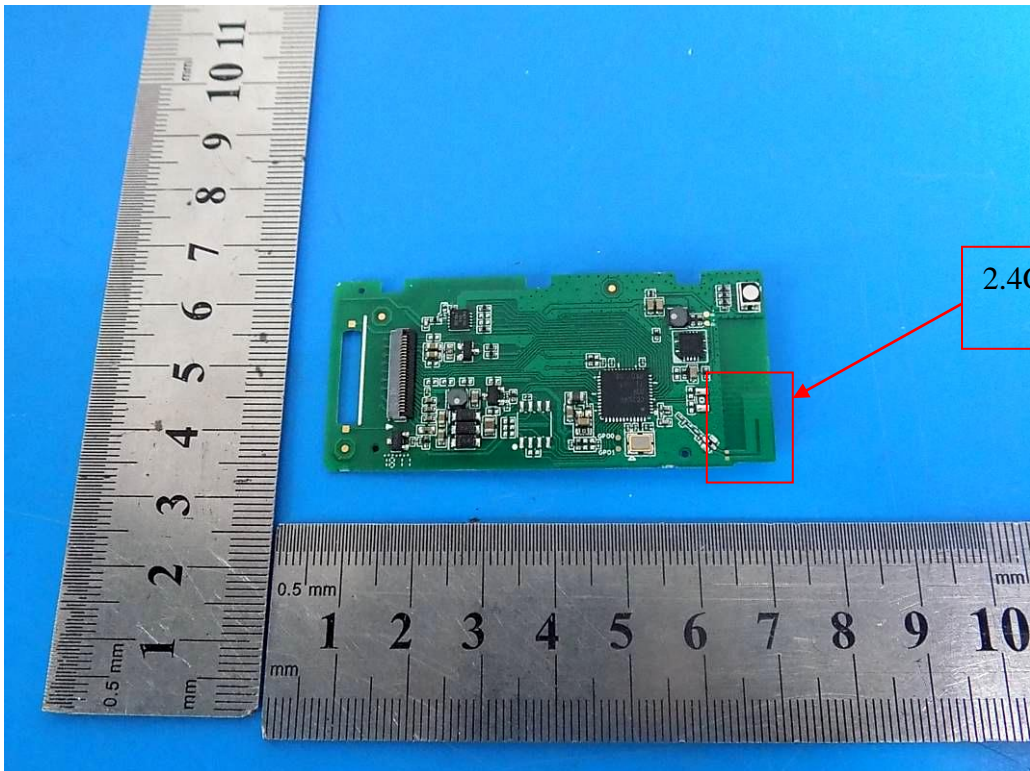

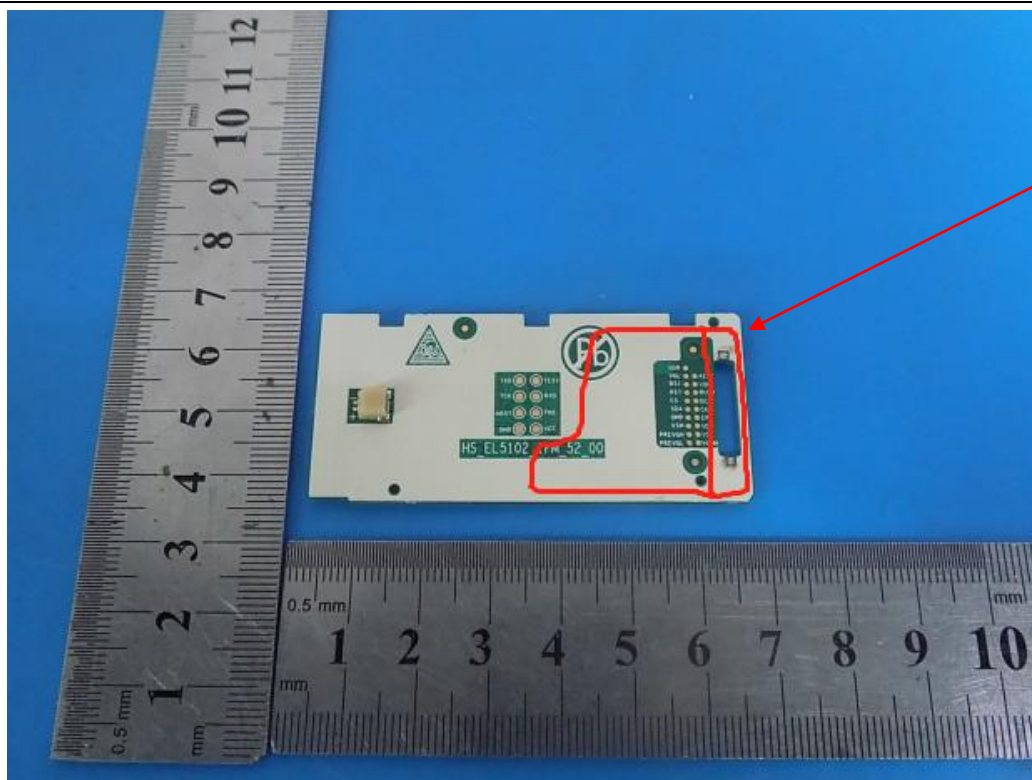

NFC ANT

----END OF REPORT----