



FCC TEST REPORT

FCC ID: 2AHB5-NOWA-1020

| | | |
|---|---|--|
| Product Name | : | Electronic shelf label |
| Model Name | : | Nowa-1020R-E31 TI,Nowa-1020-NMC,Nowa-1020R-NMC,Nowa-1020Y-NMC,Nowa-1020-NC,Nowa-1020R-NC,Nowa-1020Y-NC,Nowa-1020-NM,Nowa-1020R-NM,Nowa-1020Y-NM,Nowa-1020-N,Nowa-1020R-N,Nowa-1020Y-N,Nowa-1020-NMP,Nowa-1020R-NMP,Nowa-1020Y-NMP,Nowa-1020-NP,Nowa-1020R-NP,Nowa-1020Y-NP |
| Brand Name | : | Hanshow |
| Report No. | : | PTC20021100104E-FC01 |
| Prepared for | | |
| Zhejiang Hanshow Technology Co., Ltd. | | |
| Bld. 33, No. 966 xiuyuan Rd., BeiKeJian Innovation Park, XiuZhou District, Jiaxing, Zhejiang, China | | |
| Prepared by | | |
| Dongguan Precise Testing & Certification Corp., Ltd. | | |
| Building D, Baoding Technology Park, Guangming Road 2, Guangming Community, Dongcheng District, Dongguan, Guangdong, China | | |



1TEST RESULT CERTIFICATION

Applicant's name : Zhejiang Hanshow Technology Co., Ltd.
Address : Bld. 33, No. 966 xiuyuan Rd., BeiKeJian Innovation Park, XiuZhou District, Jiaxing, Zhejiang, China
Manufacture's name : Zhejiang Hanshow Technology Co., Ltd.
Address : Bld. 33, No. 966 xiuyuan Rd., BeiKeJian Innovation Park, XiuZhou District, Jiaxing, Zhejiang, China
Product name : Electronic shelf label
Model name : Nowa-1020R-E31 TI,Nowa-1020-NMC,Nowa-1020R-NMC,Nowa-1020Y-NMC,Nowa-1020-NC,Nowa-1020R-NC,Nowa-1020Y-NC,Nowa-1020-NM,Nowa-1020R-NM,Nowa-1020Y-NM,Nowa-1020-N,Nowa-1020R-N,Nowa-1020Y-N,Nowa-1020-NMP,Nowa-1020R-NMP,Nowa-1020Y-NMP,Nowa-1020-NP,Nowa-1020R-NP,Nowa-1020Y-NP
Brand Name : Hanshow
Standards : FCC CFR47 Part 15 Section 15.249
Test procedure : ANSI C63.10:2013
Test Date : Feb. 19, 2020 to Feb. 27, 2020
Date of Issue : Feb. 28, 2020
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

Leo Yang / Engineer

Technical Manager:

Chris Du / Manager

| | Page |
|--|-------------|
| 1 TEST RESULT CERTIFICATION..... | 2 |
| 2 TEST SUMMARY..... | 5 |
| 3 TEST FACILITY..... | 6 |
| 4 GENERAL INFORMATION..... | 7 |
| 4.1 GENERAL DESCRIPTION OF E.U.T..... | 7 |
| 4.2 TEST MODE..... | 8 |
| 5 EQUIPMENT DURING TEST..... | 9 |
| 5.1 EQUIPMENTS LIST..... | 9 |
| 5.2 MEASUREMENT UNCERTAINTY..... | 11 |
| 5.3 DESCRIPTION OF SUPPORT UNITS..... | 12 |
| 6 CONDUCTED EMISSION..... | 13 |
| 6.1 E.U.T. OPERATION..... | 13 |
| 6.2 EUT SETUP..... | 13 |
| 6.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)..... | 14 |
| 6.4 MEASUREMENT PROCEDURE:..... | 14 |
| 6.5 CONDUCTED EMISSION LIMIT..... | 14 |
| 6.6 MEASUREMENT DESCRIPTION..... | 14 |
| 6.7 CONDUCTED EMISSION TEST RESULT..... | 14 |
| 7 FIELD STRENGTH OF FUNDAMENTAL EMISSION AND RADIATED SPURIOUS EMISSIONS..... | 15 |
| 7.1 EUT OPERATION..... | 16 |
| 7.2 TEST SETUP..... | 16 |
| 7.3 SPECTRUM ANALYZER SETUP..... | 18 |
| 7.4 TEST PROCEDURE..... | 19 |
| 7.5 SUMMARY OF TEST RESULTS..... | 20 |
| 8 BAND EDGE EMISSION..... | 26 |
| 8.1 TEST PROCEDURE..... | 26 |
| 8.2 TEST SETUP..... | 26 |
| 8.3 TEST RESULTS..... | 27 |



| | |
|---|-----------|
| 9 20 DB BANDWIDTH MEASUREMENT..... | 28 |
| 9.1 TEST PROCEDURE..... | 28 |
| 9.2 TEST RESULT..... | 28 |
| 10 ANTENNA REQUIREMENT..... | 31 |
| 11 TEST PHOTOS..... | 32 |
| 12 EUT PHOTOS..... | 33 |



2 Test Summary

| Test Items | Test Requirement | Result |
|---|----------------------------|--------|
| AC Power Conducted Emission | 15.207 | N/A |
| 20dB Bandwidth | 15.215(c) | PASS |
| Band edge | 15.249 15.205 | PASS |
| Field Strength of Fundamental Emissions | 15.249(a) | PASS |
| Radiated Spurious Emissions | 15.205(a) 15.249(a) (d) | PASS |
| Antenna Requirement | 15.203 | PASS |

Remark:

N/A: Not Applicable



Report No.: PTC20021100104E-FC01

3 TEST FACILITY

Dongguan Precise Testing & Certification Corp., Ltd.

Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan, Guangdong,

China, Dongguan, 523129

China

FCC Registration Number: 790290



4 General Information

4.1 General Description of E.U.T.

| | |
|---------------------|---|
| Product Name | : Electronic shelf label |
| Model Name | : Nowa-1020R-E31 TI, Nowa-1020-NMC, Nowa-1020R-NMC, Nowa-1020Y-NMC, Nowa-1020-NC, Nowa-1020R-NC, Nowa-1020Y-NC, Nowa-1020-NM, Nowa-1020R-NM, Nowa-1020Y-NM, Nowa-1020-N, Nowa-1020R-N, Nowa-1020Y-N, Nowa-1020-NMP, Nowa-1020R-NMP, Nowa-1020Y-NMP, Nowa-1020-NP, Nowa-1020R-NP, Nowa-1020Y-NP (The differences are when product at work of EPD Screen color, Appearance color and name for commercial purpose, this report performs the model Nowa-1020R-E31 TI) |
| Operating frequency | : 2.402-2.480GHZ |
| Numbers of Channel | : 157 |
| Channel Space | : 0.5MHz |
| Antenna Type: | : FPC Antenna |
| Antenna Gain: | : 1dBi |
| Type of Modulation | : GFSK |
| Power supply | : DC 3V |



4.2 Test Mode

For Radiated: The EUT's antenna was pre-tested under the following modes:

| Test Mode | Description |
|-----------|-------------|
| Mode A | X-Y axis |
| Mode B | Y-Z axis |
| Mode C | X-Z axis |

From the above modes, the worst case was found in Mode A, Therefore only the test data of the mode was recorded in this report.

Channel List:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|----------|-----------------|-----------|-----------------|---------|-----------------|------------|-----------------|
| 1 | 2402 | 16 | 2409.5 | -- | -- | -- | -- |
| 2 | 2402.5 | -- | -- | -- | -- | -- | -- |
| 3 | 2403 | -- | -- | -- | -- | -- | -- |
| 4 | 2403.5 | -- | -- | -- | -- | -- | -- |
| 5 | 2404 | -- | -- | -- | -- | -- | -- |
| 6 | 2404.5 | -- | -- | -- | -- | -- | -- |
| 7 | 2405 | -- | -- | -- | -- | -- | -- |
| 8 | 2405.5 | 79 | 2441 | -- | -- | -- | -- |
| 9 | 2406 | -- | -- | -- | -- | -- | -- |
| 10 | 2406.5 | -- | -- | -- | -- | -- | -- |
| 11 | 2407 | -- | -- | -- | -- | 153 | 2478 |
| 12 | 2407.5 | -- | -- | -- | -- | 154 | 2478.5 |
| 13 | 2408 | -- | -- | -- | -- | 155 | 2479 |
| 14 | 2408.5 | -- | -- | -- | -- | 156 | 2479.5 |
| 15 | 2409 | -- | -- | -- | -- | 157 | 2480 |

The 3 channels of lower, middle and higher were chosen for test.

| Channel | Frequency(MHz) |
|---------|----------------|
| 1 | 2402 |
| 79 | 2441 |
| 157 | 2480 |



5 Equipment During Test

5.1 Equipments List

RF Conducted Test

| Name of Equipment | Manufacturer | Model | Serial No. | Characteristics | Calibration Due |
|---------------------|--------------|---------|---------------|-----------------|-----------------|
| MXG Signal Analyzer | Agilent | N9020A | SER MY5111038 | 10Hz-30GHz | Aug. 21, 2020 |
| Coaxial Cable | CDS | 79254 | 46107086 | 10Hz-30GHz | Aug. 21, 2020 |
| Power Meter | Anritsu | ML2495A | 0949003 | 300MHz-40GHz | Aug. 28, 2020 |
| Power Sensor | Anritsu | MA2411B | 0917017 | 300MHz-40GHz | Aug. 28, 2020 |

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Radiated Emissions

| Name of Equipment | Manufacturer | Model | Serial No. | Characteristics | Calibration Due |
|------------------------------|---------------|------------|--------------|-----------------|-----------------|
| EMI Test Receiver | Rohde&Schwarz | ESCI | 101417 | 9KHz-3GHz | Aug. 28, 2020 |
| Loop Antenna | Schwarzbeck | FMZB 1519 | 012 | 9 KHz -30MHz | Aug. 28, 2020 |
| Bilog Antenna | SCHWARZBECK | VULB9160 | 9160-3355 | 25MHz-2GHz | Aug. 22, 2020 |
| Preamplifier (low frequency) | SCHWARZBECK | BBV 9475 | 9745-0013 | 1MHz-1GHz | Aug. 21, 2020 |
| Cable | Schwarzbeck | PLF-100 | 549489 | 9KHz-3GHz | Aug. 21, 2020 |
| Spectrum Analyzer | Agilent | E4407B | MY45109572 | 9KHz-40GHz | Aug. 28, 2020 |
| Horn Antenna | SCHWARZBECK | 9120D | 9120D-1246 | 1GHz-18GHz | Apr. 13, 2020 |
| Power Amplifier | LUNAR EM | LNA1G18-40 | J10100000081 | 1GHz-26.5GHz | Aug. 21, 2020 |
| Horn Antenna | SCHWARZBECK | BBHA 9170 | 9170-181 | 14GHz-40GHz | Apr. 13, 2020 |
| Amplifier | SCHWARZBECK | BBV 9721 | 9721-205 | 18GHz-40GHz | Aug. 21, 2020 |
| Cable | H+S | CBL-26 | N/A | 1GHz-26.5GHz | Aug. 21, 2020 |



| | | | | | |
|----------|-----|------|------|------------|---------------|
| RF Cable | R&S | R204 | R21X | 1GHz-40GHz | Aug. 21, 2020 |
|----------|-----|------|------|------------|---------------|

Conducted Emissions

| Name of Equipment | Manufacturer | Model | Serial No. | Characteristics | Calibration Due |
|--------------------------|---------------|--------|------------|-----------------|-----------------|
| EMI Test Receiver | Rohde&Schwarz | ESCI | 101417 | 9KHz-3GHz | Aug. 28, 2020 |
| Artificial Mains Network | Rohde&Schwarz | ENV216 | 102453 | 9KHz-300MHz | Aug. 21, 2020 |
| Artificial Mains Network | Rohde&Schwarz | ENV216 | 101342 | 9KHz-300MHz | Aug. 21, 2020 |



5.2 Measurement Uncertainty

| Parameter | Uncertainty |
|---|--------------------------|
| RF output power, conducted | ±1.0dB |
| Power Spectral Density, conducted | ±2.2dB |
| Radio Frequency | ± 1 x 10 ⁻⁶ |
| Bandwidth | ± 1.5 x 10 ⁻⁶ |
| Time | ±2% |
| Duty Cycle | ±2% |
| Temperature | ±1°C |
| Humidity | ±5% |
| DC and low frequency voltages | ±3% |
| Conducted Emissions (150kHz~30MHz) | ±3.64dB |
| Radiated Emission(30MHz~1GHz) | ±5.03dB |
| Radiated Emission(1GHz~25GHz) | ±4.74dB |
| Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95% | |



5.3 Description of Support Units

| Equipment | Model No. | Series No. |
|-----------|-----------|------------|
| Adapter | N/A | N/A |

6 Conducted Emission

| | | |
|-------------------|---|---|
| Test Requirement: | : | FCC CFR 47 Part 15 Section 15.207 |
| Test Method: | : | ANSI C63.10:2013 |
| Test Result: | : | PASS |
| Frequency Range: | : | 150kHz to 30MHz |
| Class/Severity: | : | Class B |
| Detector: | : | Peak for pre-scan (9kHz Resolution Bandwidth) |


6.1 E.U.T. Operation

Operating Environment :


| | | |
|-----------------------|---|----------|
| Temperature: | : | 25.5 °C |
| Humidity: | : | 51 % RH |
| Atmospheric Pressure: | : | 101.2kPa |
| Test Voltage | : | DC 3V |

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10: 2013

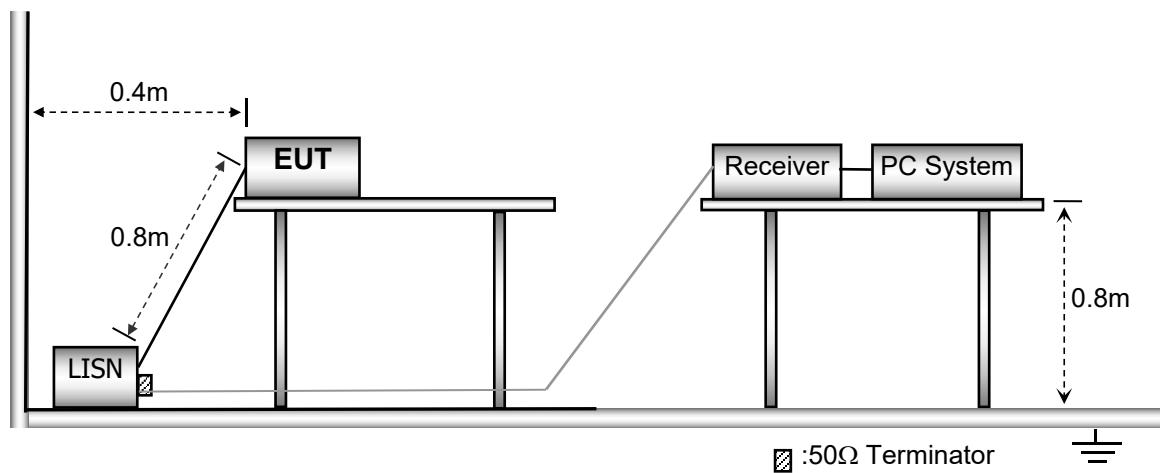

6.3 Test SET-UP (Block Diagram of Configuration)

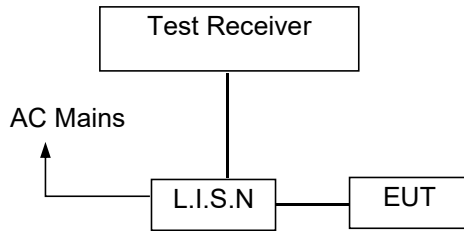

6.4 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

6.5 Conducted Emission Limit

Conducted Emission

| Frequency(MHz) | Quasi-peak | Average |
|----------------|------------|---------|
| 0.15-0.5 | 66-56 | 56-46 |
| 0.5-5.0 | 56 | 46 |
| 5.0-30.0 | 60 | 50 |

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

6.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.7 Conducted Emission Test Result

N/A

N/A: Not Applicable



7 Field Strength of Fundamental Emission and Radiated Spurious Emissions

Test Requirement: : FCC CFR47 Part 15 Section 15.209 & 15.249
 Test Method: : ANSI C63.10:2013
 Test Result: : PASS
 Measurement Distance: : 3m
 Limit: : See the follow table

| Frequency (MHz) | Field Strength | | Field Strength Limit at 3m Measurement Dist | |
|-----------------|----------------|--------------|---|--------------------------------------|
| | uV/m | Distance (m) | uV/m | dBuV/m |
| 0.009 ~ 0.490 | 2400/F(kHz) | 300 | 10000 * 2400/F(kHz) | 20log ^{(2400/F(kHz))} + 80 |
| 0.490 ~ 1.705 | 24000/F(kHz) | 30 | 100 * 24000/F(kHz) | 20log ^{(24000/F(kHz))} + 40 |
| 1.705 ~ 30 | 30 | 30 | 100 * 30 | 20log ⁽³⁰⁾ + 40 |
| 30 ~ 88 | 100 | 3 | 100 | 20log ⁽¹⁰⁰⁾ |
| 88 ~ 216 | 150 | 3 | 150 | 20log ⁽¹⁵⁰⁾ |
| 216 ~ 960 | 200 | 3 | 200 | 20log ⁽²⁰⁰⁾ |
| Above 960 | 500 | 3 | 500 | 20log ⁽⁵⁰⁰⁾ |

Note: 1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

The field strength of emission from intentional radiators operated within these frequency bands shall comply with the following:

| Frequency(MHz) | Filed Strength of Fundamental(at 3m) | | Filed Strength of Harmonics(at 3m) | |
|----------------|--------------------------------------|---------|------------------------------------|---------|
| | PEAK | AVERAGE | PEAK | AVERAGE |
| 902-928 | 114 | 94 | 74.0 | 54.0 |
| 2400-2483,5 | 114 | 94 | 74.0 | 54.0 |
| 5725-5875 | 114 | 94 | 74.0 | 54.0 |
| 24000-24250 | 128 | 108 | 88.0 | 68.0 |

7.1 EUT Operation


Operating Environment :

- Temperature: : 23.5 °C
- Humidity: : 51.1 % RH
- Atmospheric Pressure: : 101.2kPa
- EUT Operation : : Running
- Test Voltage : : DC 3V


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz.

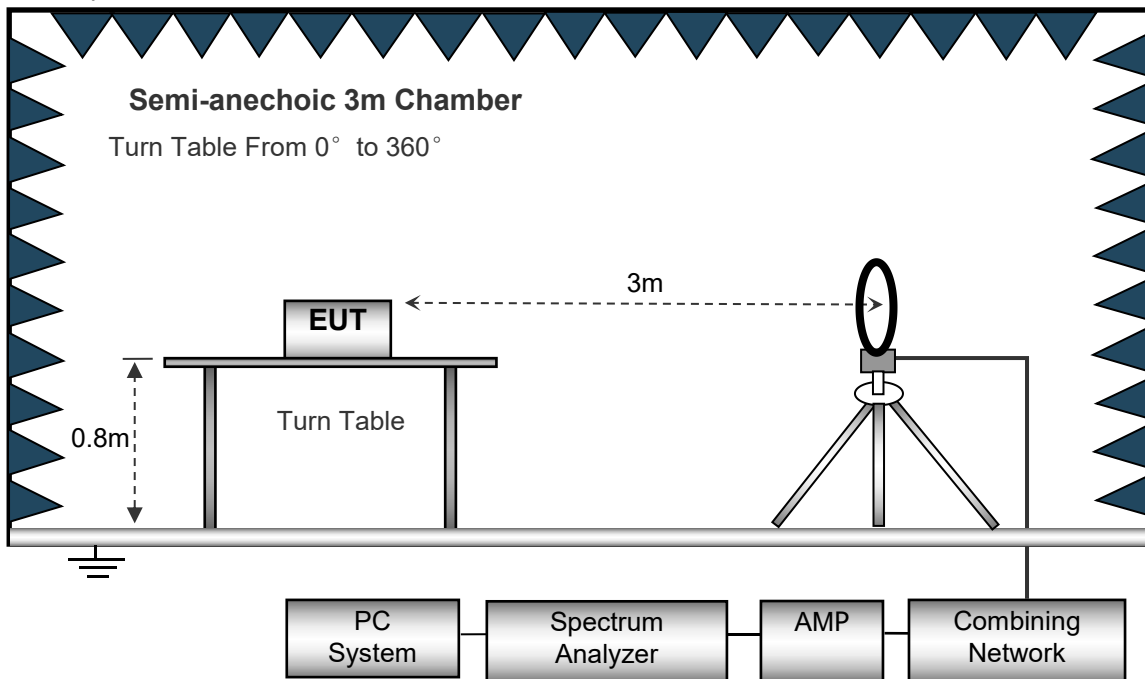

The test setup for emission measurement from 30 MHz to 1 GHz.

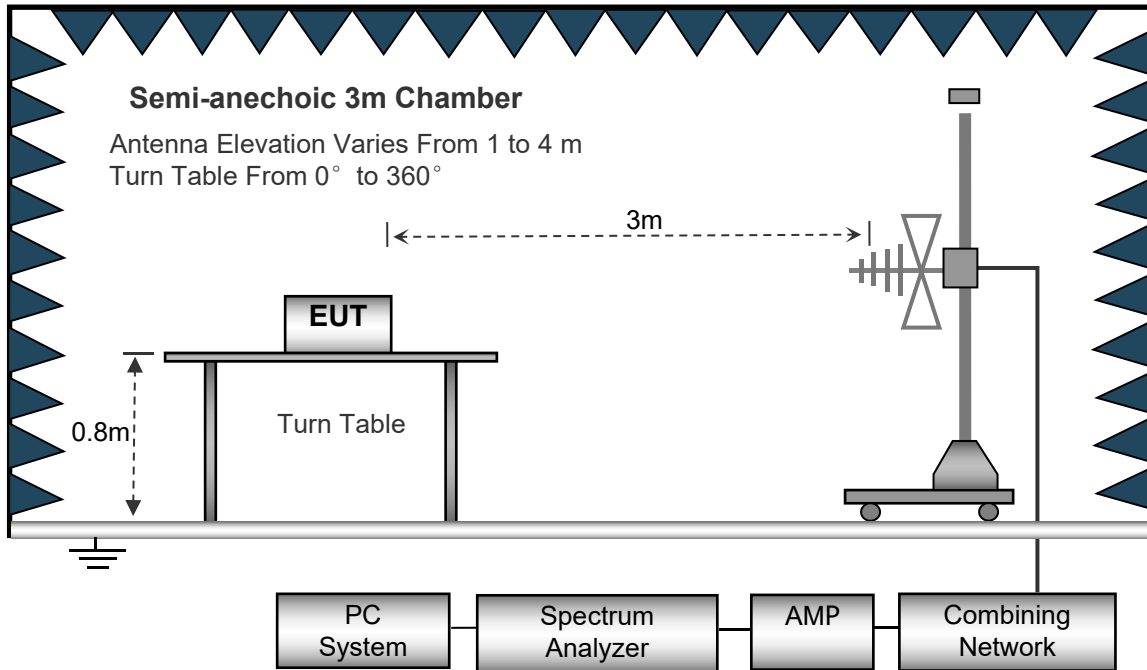

The test setup for emission measurement above 1 GHz.

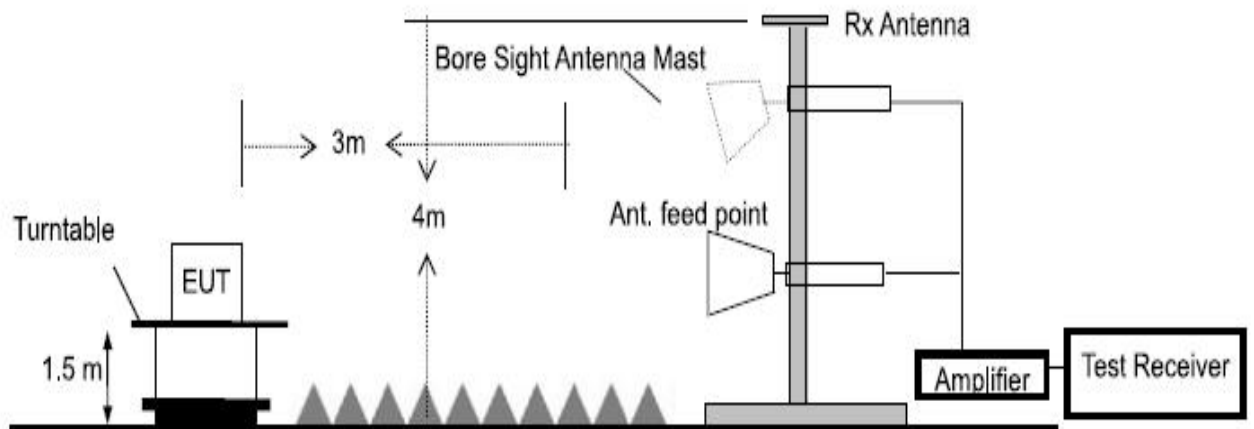



7.3 Spectrum Analyzer Setup

| Spectrum Parameter | Setting |
|---------------------------------------|--|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10th carrier harmonic |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter | Setting |
|------------------------|----------------------------------|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |



7.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.



7.5 Summary of Test Results

Test Frequency: Below 30MHz

The measurements were more than 20 dB below the limit and not reported.

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.


Test Frequency: 30MHz ~ 1GHz

Remark: only the worst data were reported.



Test plot for Horizontal: 2402MHz

Report No.: PTC20021100104E-FC01

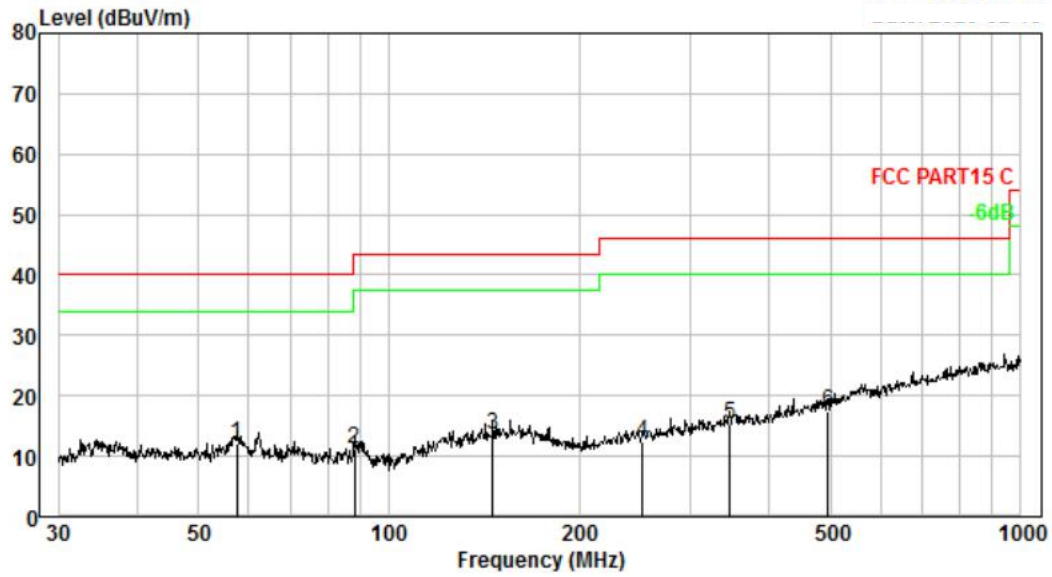


| No. | Freq MHz | Cable Loss dB | ANT Factor dB/m | Receiver Reading dBuV | Preamp Factor dB | Emission Level dBuV/m | Limit dBuV/m | Over Limit dB | Remark |
|-----|----------|---------------|-----------------|-----------------------|------------------|-----------------------|--------------|---------------|--------|
| 1. | 57.392 | 2.31 | 11.90 | 27.76 | 29.93 | 12.04 | 40.00 | -27.96 | QP |
| 2. | 88.342 | 3.06 | 9.04 | 29.24 | 29.98 | 11.36 | 43.50 | -32.14 | QP |
| 3. | 145.861 | 3.92 | 13.55 | 26.12 | 30.02 | 13.57 | 43.50 | -29.93 | QP |
| 4. | 252.063 | 4.86 | 12.53 | 25.06 | 30.20 | 12.25 | 46.00 | -33.75 | QP |
| 5. | 346.809 | 5.41 | 14.33 | 26.20 | 30.51 | 15.43 | 46.00 | -30.57 | QP |
| 6. | 495.934 | 6.03 | 17.01 | 25.36 | 30.89 | 17.51 | 46.00 | -28.49 | QP |



Test plot for Vertical: 2402MHz

Report No.: PTC20021100104E-FC01

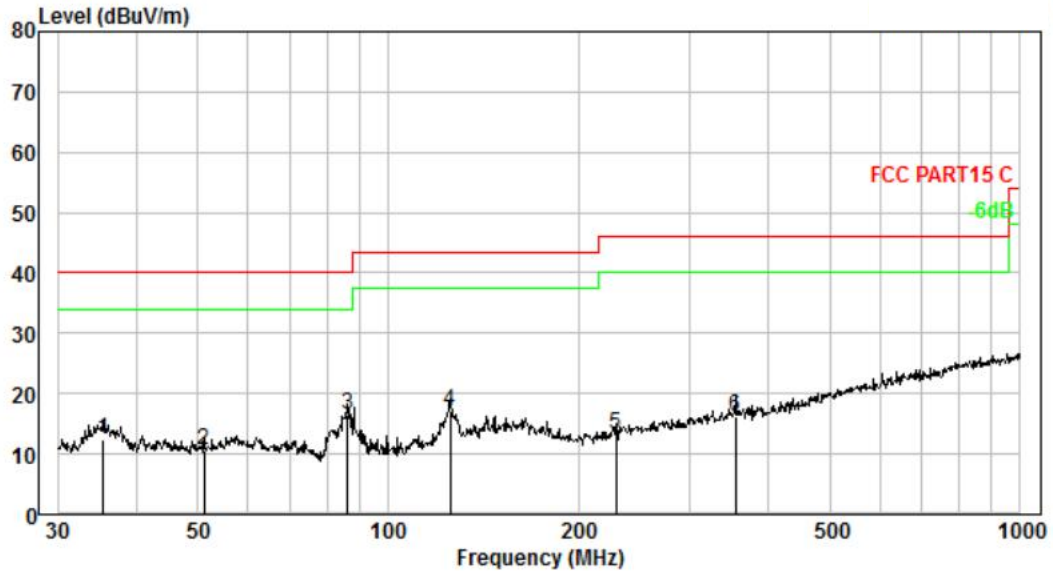

| No. | Freq MHz | Cable Loss dB | ANT Factor dB/m | Receiver Reading dBuV | Preamp Factor dB | Emission Level dBuV/m | Limit dBuV/m | Over Limit dB | Remark |
|-----|----------|---------------|-----------------|-----------------------|------------------|-----------------------|--------------|---------------|--------|
| 1. | 35.375 | 1.49 | 12.19 | 28.55 | 29.90 | 12.33 | 40.00 | -27.67 | QP |
| 2. | 51.121 | 2.12 | 12.10 | 26.43 | 29.92 | 10.73 | 40.00 | -29.27 | QP |
| 3. | 86.200 | 3.02 | 8.82 | 34.53 | 29.98 | 16.39 | 40.00 | -23.61 | QP |
| 4. | 125.446 | 3.66 | 12.37 | 31.20 | 30.01 | 17.22 | 43.50 | -26.28 | QP |
| 5. | 229.293 | 4.70 | 11.92 | 26.71 | 30.13 | 13.20 | 46.00 | -32.80 | QP |
| 6. | 354.183 | 5.45 | 14.44 | 27.03 | 30.54 | 16.38 | 46.00 | -29.62 | QP |



Above 1000MHz-10th Harmonics:

Operation Mode: GFSK (CH1: 2402MHz)

| Freq. (MHz) | Ant. Pol. H/V | Emission Level(dBuV/m) | | Limit 3m(dBuV/m) | | Margin(dB) | |
|----------------|------------------|------------------------|-------|------------------|----|------------|--------|
| | | PK | AV | PK | AV | PK | AV |
| 2402(F) | V | 90.56 | 85.43 | 114 | 94 | -23.44 | -8.57 |
| 4804 | V | 56.89 | 43.32 | 74 | 54 | -17.11 | -10.68 |
| 7206 | V | 55.51 | 42.07 | 74 | 54 | -18.49 | -11.93 |
| 9608 | V | 56.18 | 42.42 | 74 | 54 | -17.82 | -11.58 |
| 12010 | V | 56.62 | 42.58 | 74 | 54 | -17.38 | -11.42 |
| 14412 | V | 56.16 | 42.21 | 74 | 54 | -17.84 | -11.79 |
| 16821 | V | 56.34 | 42.37 | 74 | 54 | -17.66 | -11.63 |
| 2402(F) | H | 88.59 | 83.14 | 114 | 94 | -25.41 | -10.86 |
| 4804 | H | 56.91 | 43.06 | 74 | 54 | -17.09 | -10.94 |
| 7206 | H | 55.42 | 42.37 | 74 | 54 | -18.58 | -11.63 |
| 9608 | H | 56.19 | 42.25 | 74 | 54 | -17.81 | -11.75 |
| 12010 | H | 56.64 | 42.44 | 74 | 54 | -17.36 | -11.56 |
| 14412 | H | 56.71 | 42.52 | 74 | 54 | -17.29 | -11.48 |
| 16814 | H | 56.23 | 42.05 | 74 | 54 | -17.77 | -11.95 |



Operation Mode: GFSK (CH79: 2441MHz)

| Freq. (MHz) | Ant. Pol. H/V | Emission Level(dBuV/m) | | Limit 3m(dBuV/m) | | Margin(dB) | |
|----------------|------------------|------------------------|-------|------------------|----|------------|--------|
| | | PK | AV | PK | AV | PK | AV |
| 2441(F) | V | 90.06 | 84.88 | 114 | 94 | -23.94 | -9.12 |
| 4882 | V | 56.83 | 43.14 | 74 | 54 | -17.17 | -10.86 |
| 7323 | V | 55.72 | 42.68 | 74 | 54 | -18.28 | -11.32 |
| 9764 | V | 56.33 | 42.52 | 74 | 54 | -17.67 | -11.48 |
| 12205 | V | 56.15 | 42.34 | 74 | 54 | -17.85 | -11.66 |
| 14646 | V | 56.71 | 42.15 | 74 | 54 | -17.29 | -11.85 |
| 17087 | V | 56.32 | 42.44 | 74 | 54 | -17.68 | -11.56 |
| 2441(F) | H | 89.31 | 84.06 | 114 | 94 | -24.69 | -9.94 |
| 4882 | H | 56.53 | 43.11 | 74 | 54 | -17.47 | -10.89 |
| 7323 | H | 55.39 | 42.27 | 74 | 54 | -18.61 | -11.73 |
| 9764 | H | 56.81 | 42.64 | 74 | 54 | -17.19 | -11.36 |
| 12205 | H | 56.15 | 42.42 | 74 | 54 | -17.85 | -11.58 |
| 14646 | H | 56.76 | 42.08 | 74 | 54 | -17.24 | -11.92 |
| 17087 | H | 56.28 | 42.17 | 74 | 54 | -17.72 | -11.83 |



Operation Mode: GFSK (CH157: 2480MHz)

| Freq. (MHz) | Ant. Pol. H/V | Emission Level(dBuV/m) | | Limit 3m(dBuV/m) | | Margin(dB) | |
|----------------|------------------|------------------------|-------|------------------|----|------------|--------|
| | | PK | AV | PK | AV | PK | AV |
| 2480(F) | V | 89.35 | 84.24 | 114 | 94 | -24.65 | -9.76 |
| 4960 | V | 56.58 | 43.07 | 74 | 54 | -17.42 | -10.93 |
| 7440 | V | 55.08 | 42.41 | 74 | 54 | -18.92 | -11.59 |
| 9920 | V | 56.34 | 42.26 | 74 | 54 | -17.66 | -11.74 |
| 12400 | V | 56.51 | 42.42 | 74 | 54 | -17.49 | -11.58 |
| 14880 | V | 56.65 | 42.08 | 74 | 54 | -17.35 | -11.92 |
| 17360 | V | 56.34 | 42.11 | 74 | 54 | -17.66 | -11.89 |
| 2480(F) | H | 88.72 | 83.15 | 114 | 94 | -25.28 | -10.85 |
| 4960 | H | 56.42 | 42.85 | 74 | 54 | -17.58 | -11.15 |
| 7440 | H | 55.91 | 42.24 | 74 | 54 | -18.09 | -11.76 |
| 9920 | H | 56.05 | 42.31 | 74 | 54 | -17.95 | -11.69 |
| 12400 | H | 56.29 | 41.76 | 74 | 54 | -17.71 | -12.24 |
| 14880 | H | 56.38 | 42.01 | 74 | 54 | -17.62 | -11.99 |
| 17360 | H | 56.53 | 42.28 | 74 | 54 | -17.47 | -11.72 |

8 BAND EDGE EMISSION

8.1 TEST PROCEDURE

The EUT was placed on a styrofoam table which is 1.5m above ground plane.

The measurement procedure at the band edges was simplified by performing the measurement in just one plot. Both, the in-band-emission and the unwanted emission were be encompassed by the span. After trace stabilization, the maximum peak was be determined by a peak detector and the value was marked by an appropriate limit line. The second limit line, which is 20dB below the first, marks the limit for the emissions in the unrestricted band. A maximum-peak-detector marks the highest emission in the unrestricted band next to the band edge.


The measurements were performed at the lower end of the 2.4GHz band.

Use the following spectrum analyzer settings:

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:

| EMI Test Receiver | Setting |
|-------------------|----------|
| Attenuation | Auto |
| RBW | 1MHz |
| VBW | 3MHz |
| Detector | Peak |
| Trace | Max hold |

8.2 TEST SETUP

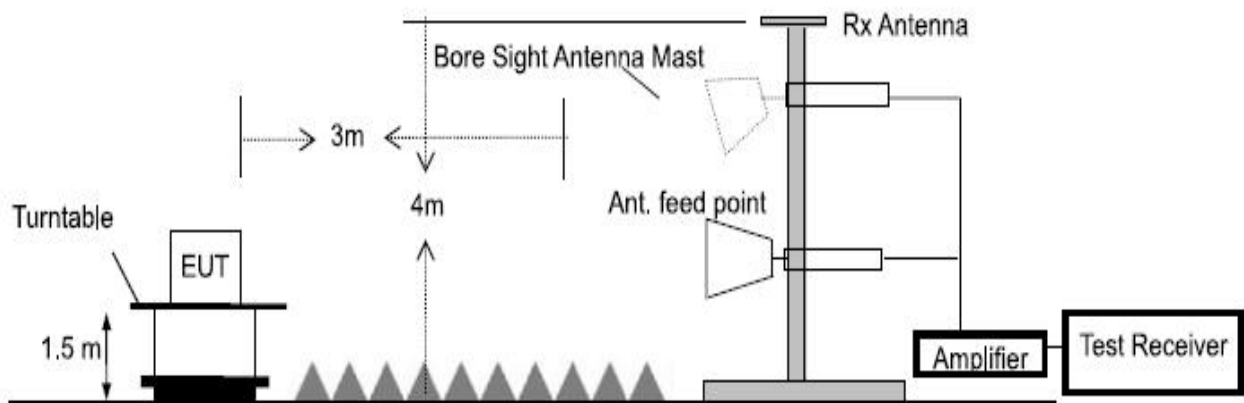



8.3 TEST RESULTS

| Frequency (MHz) | Antenna polarization (H/V) | Emission (dBuV/m) | | Band edge Limit (dBuV/m) | | Margin (dB) | |
|-----------------|----------------------------|-------------------|-------|--------------------------|----|-------------|--------|
| | | PK | AV | PK | AV | PK | AV |
| 2400 | H | 44.96 | 36.25 | 74 | 54 | -29.04 | -17.75 |
| 2400 | V | 44.03 | 35.74 | 74 | 54 | -29.97 | -18.26 |
| 2483.5 | H | 44.16 | 35.05 | 74 | 54 | -29.84 | -18.95 |
| 2483.5 | V | 44.22 | 34.59 | 74 | 54 | -29.78 | -19.41 |



9 20 dB Bandwidth Measurement

Test Requirement : FCC Part 15C Section 15.215(c)/Part 2 J Section 2.1049
Test Method : ANSI C63.10:2013
Test Mode : Running



9.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

9.2 Test Result

Test Mode: Low / Middle / High Mode

| Channel number | Channel frequency (MHz) | 20dB Down BW(kHz) |
|----------------|-------------------------|-------------------|
| Low | 2402 | 286 |
| Middle | 2441 | 286 |
| High | 2480 | 283 |

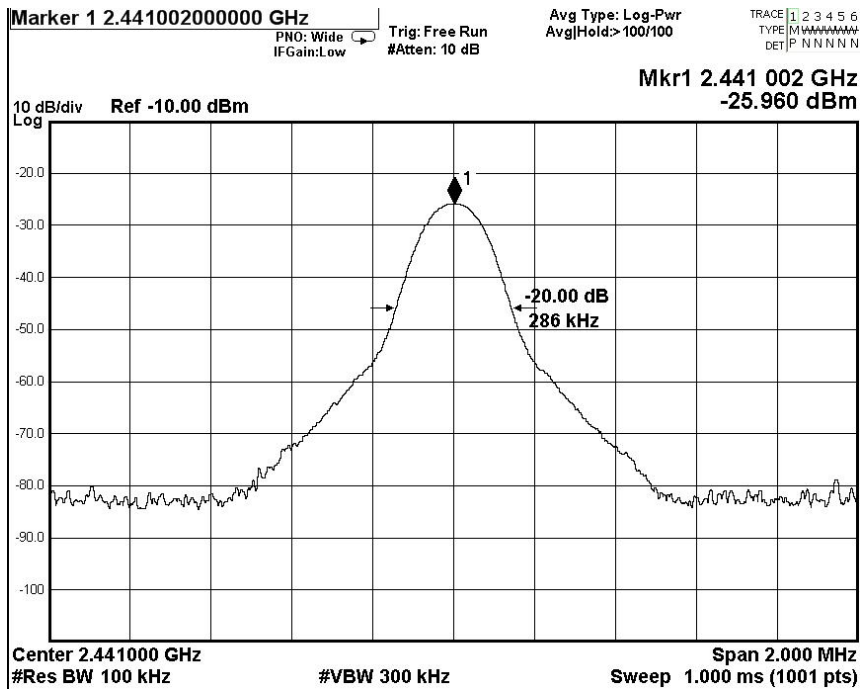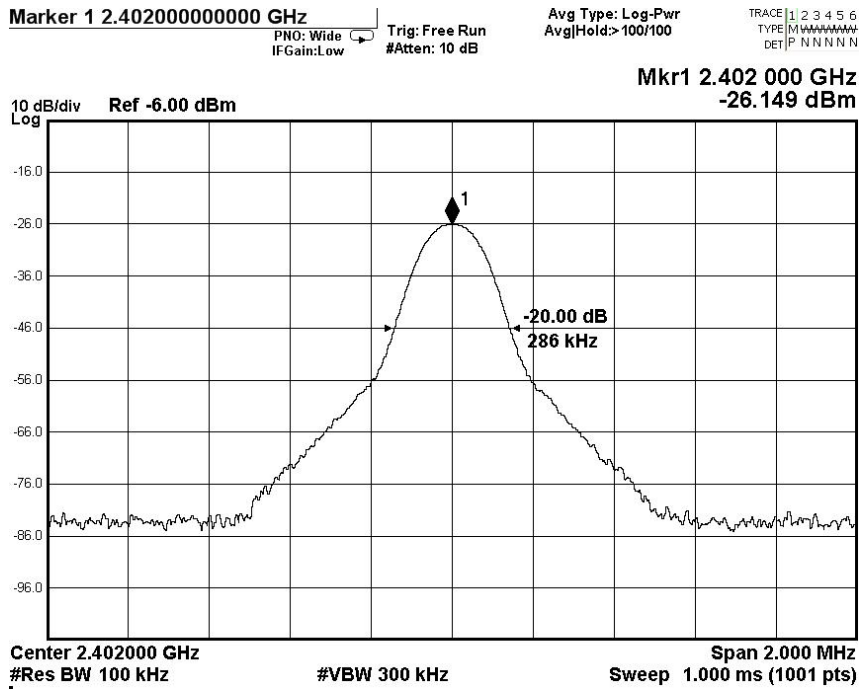

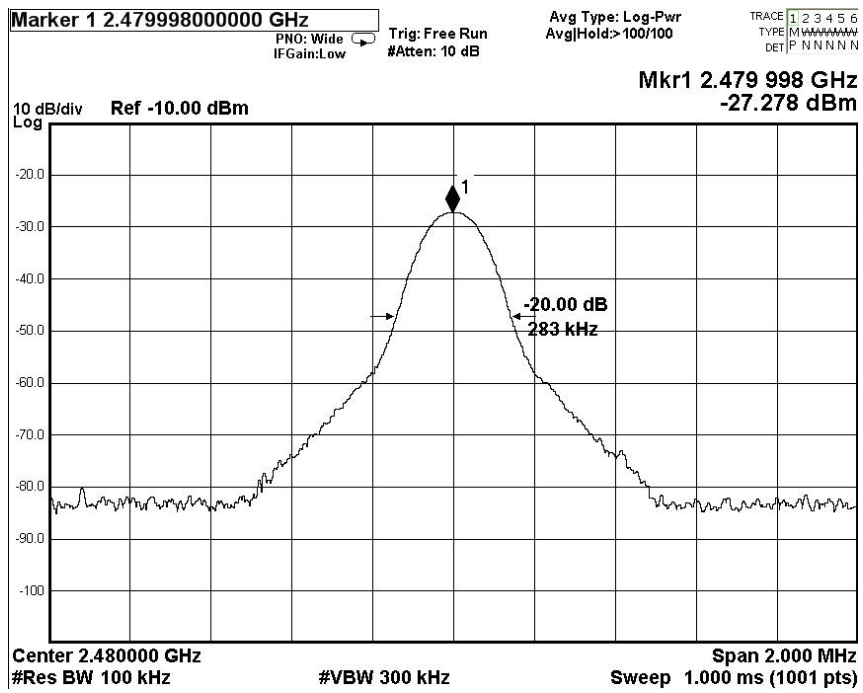





10 Antenna Requirement

According to the FCC part15.203, a transmitter can only be sold or operated with antennas with which it was approved. This product has an internal FPC Antenna,max gain is 1dBi, it meet the requirement of this section.






11 TEST PHOTOS

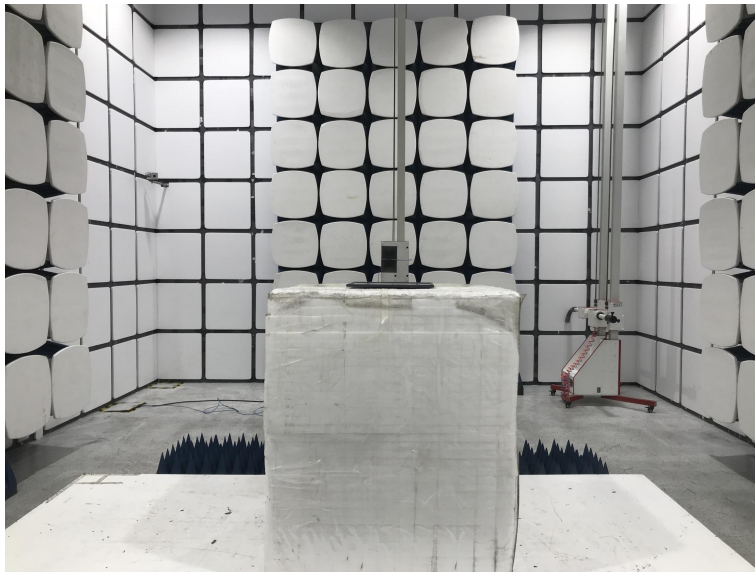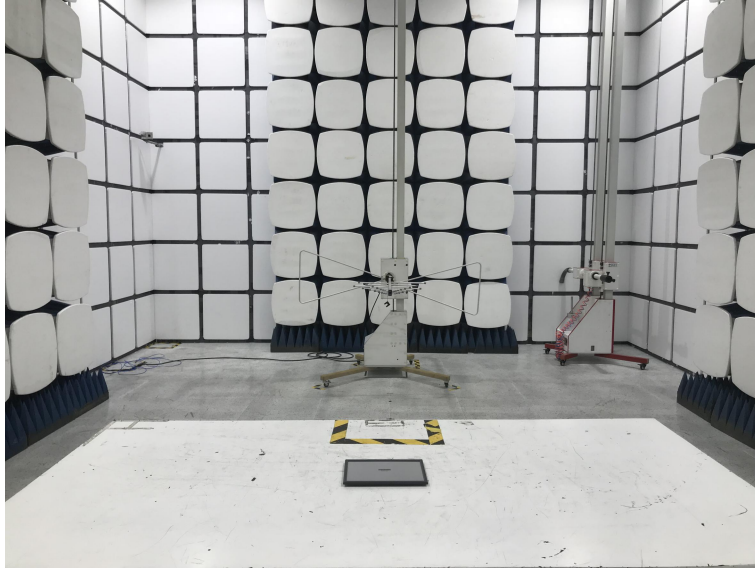






12 EUT PHOTOS

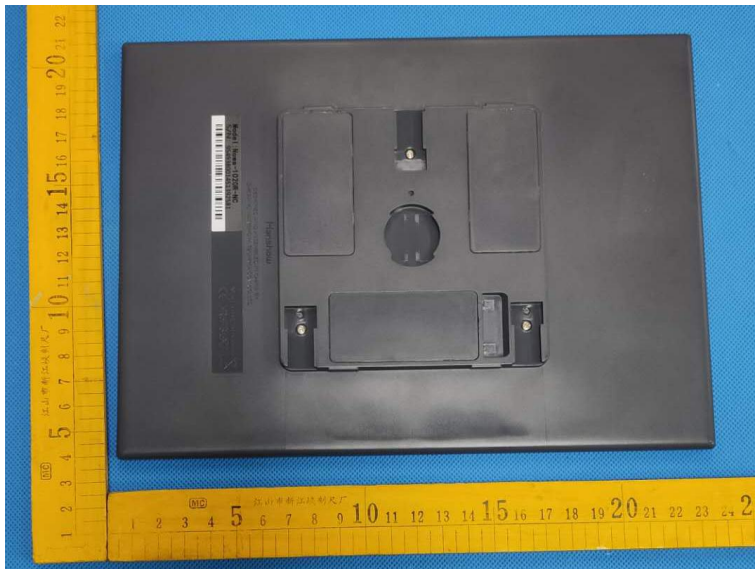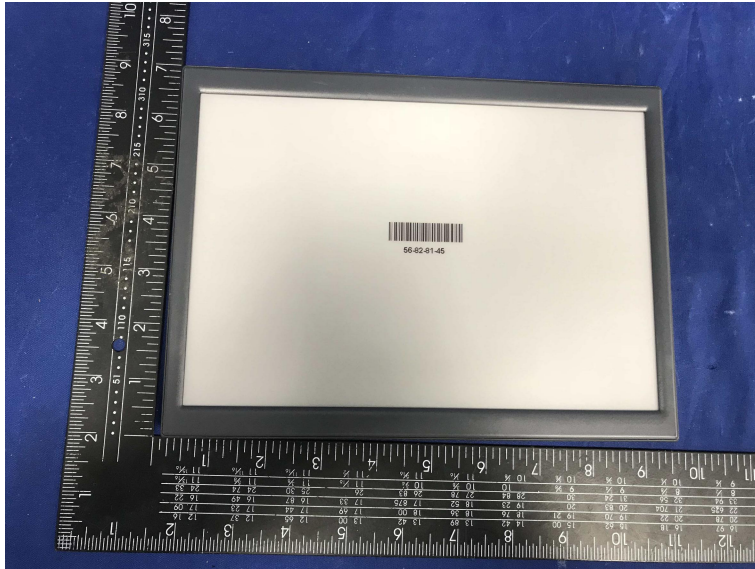


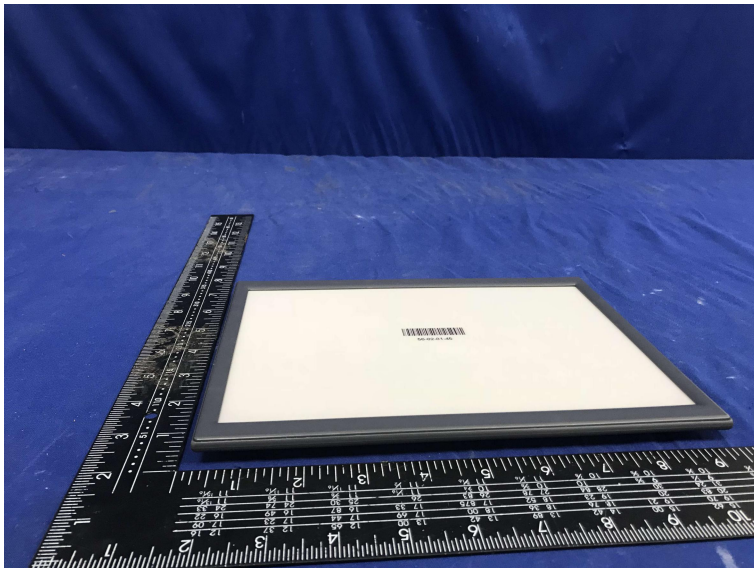

I

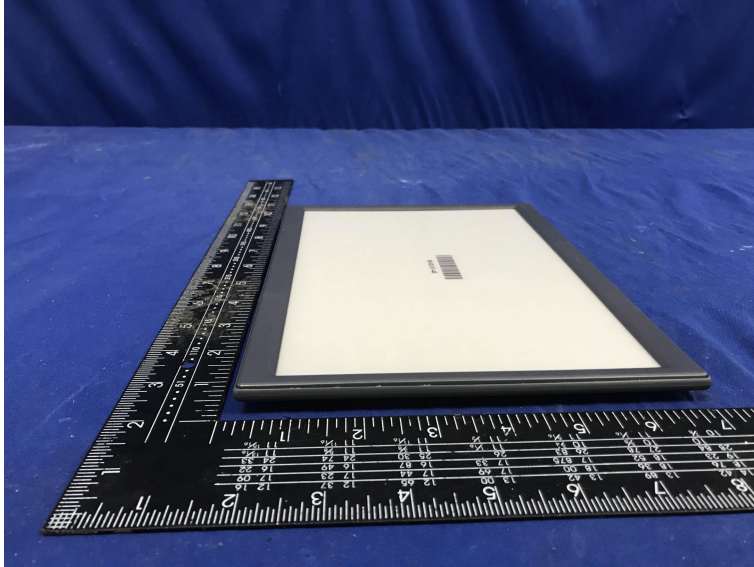

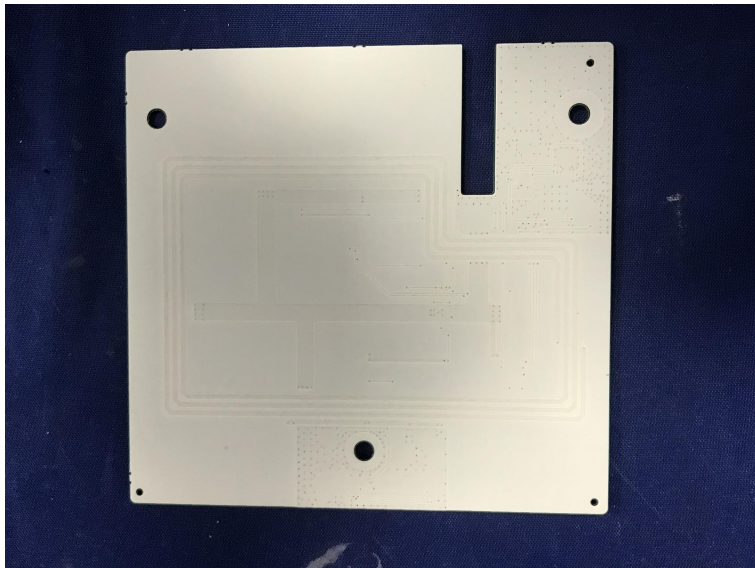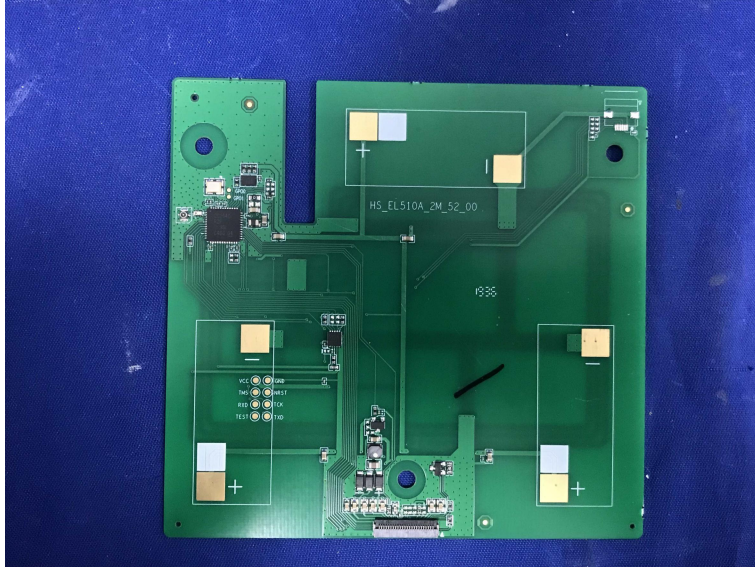

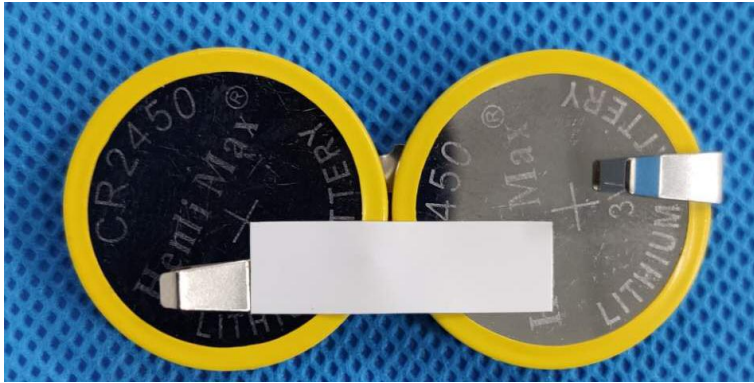

*****THE END REPORT*****