

FCC Test Report

Report No.: RF170505C03A

FCC ID: 2AHBNAP21

Test Model: AP21

Received Date: May 05, 2017

Test Date: May 17 ~ Dec. 19, 2017

Issued Date: Dec. 20, 2017

Applicant: Mist Systems, Inc.

Address: 1601 South De Anza Blvd. Suite 248 Cupertino California United States
95014

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan,
R.O.C.

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, TAIWAN (R.O.C.)

FCC Registration: 788550

Designation Number: TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

| | |
|---|-----------|
| Release Control Record | 4 |
| 1 Certificate of Conformity | 5 |
| 2 Summary of Test Results | 6 |
| 2.1 Measurement Uncertainty..... | 6 |
| 2.2 Modification Record..... | 6 |
| 3 General Information | 7 |
| 3.1 General Description of EUT..... | 7 |
| 3.2 Description of Test Modes..... | 9 |
| 3.2.1 Test Mode Applicability and Tested Channel Detail..... | 10 |
| 3.3 Duty Cycle of Test Signal..... | 12 |
| 3.4 Description of Support Units..... | 14 |
| 3.4.1 Configuration of System under Test..... | 14 |
| 3.5 General Description of Applied Standards..... | 15 |
| 4 Test Types and Results | 16 |
| 4.1 Radiated Emission and Bandedge Measurement..... | 16 |
| 4.1.1 Limits of Radiated Emission and Bandedge Measurement..... | 16 |
| 4.1.2 Test Instruments..... | 17 |
| 4.1.3 Test Procedures..... | 18 |
| 4.1.4 Deviation from Test Standard..... | 18 |
| 4.1.5 Test Setup..... | 19 |
| 4.1.6 EUT Operating Conditions..... | 20 |
| 4.1.7 Test Results..... | 21 |
| 4.2 Conducted Emission Measurement..... | 71 |
| 4.2.1 Limits of Conducted Emission Measurement..... | 71 |
| 4.2.2 Test Instruments..... | 71 |
| 4.2.3 Test Procedures..... | 72 |
| 4.2.4 Deviation from Test Standard..... | 72 |
| 4.2.5 Test Setup..... | 73 |
| 4.2.6 EUT Operating Conditions..... | 73 |
| 4.2.7 Test Results..... | 74 |
| 4.3 Transmit Power Measurement..... | 78 |
| 4.3.1 Limits of Transmit Power Measurement..... | 78 |
| 4.3.2 Test Setup..... | 78 |
| 4.3.3 Test Instruments..... | 79 |
| 4.3.4 Test Procedure..... | 79 |
| 4.3.5 Deviation from Test Standard..... | 79 |
| 4.3.6 EUT Operating Conditions..... | 79 |
| 4.3.7 Test Result..... | 80 |
| 4.4 Occupied Bandwidth Measurement..... | 95 |
| 4.4.1 Test Setup..... | 95 |
| 4.4.2 Test Instruments..... | 95 |
| 4.4.3 Test Procedure..... | 95 |
| 4.4.4 Test Results..... | 96 |
| 4.5 Peak Power Spectral Density Measurement..... | 104 |
| 4.5.1 Limits of Peak Power Spectral Density Measurement..... | 104 |
| 4.5.2 Test Setup..... | 104 |
| 4.5.3 Test Instruments..... | 104 |
| 4.5.4 Test Procedures..... | 105 |
| 4.5.5 Deviation from Test Standard..... | 105 |
| 4.5.6 EUT Operating Conditions..... | 105 |
| 4.5.7 Test Results..... | 106 |
| 4.6 Frequency Stability..... | 115 |
| 4.6.1 Limits of Frequency Stability Measurement..... | 115 |

| | | |
|----------|---|------------|
| 4.6.2 | Test Setup..... | 115 |
| 4.6.3 | Test Instruments | 115 |
| 4.6.4 | Test Procedure | 115 |
| 4.6.5 | Deviation from Test Standard | 115 |
| 4.6.6 | EUT Operating Condition | 116 |
| 4.6.7 | Test Results | 117 |
| 4.7 | 6dB Bandwidth Measurement..... | 119 |
| 4.7.1 | Limits of 6dB Bandwidth Measurement..... | 119 |
| 4.7.2 | Test Setup..... | 119 |
| 4.7.3 | Test Instruments | 119 |
| 4.7.4 | Test Procedure | 119 |
| 4.7.5 | Deviation from Test Standard | 119 |
| 4.7.6 | EUT Operating Condition | 119 |
| 4.7.7 | Test Results | 120 |
| 5 | Pictures of Test Arrangements..... | 124 |
| | Appendix – Information on the Testing Laboratories | 125 |

Release Control Record


| Issue No. | Description | Date Issued |
|--------------|------------------|---------------|
| RF170505C03A | Original release | Dec. 20, 2017 |

1 Certificate of Conformity

Product: Wi-Fi & BLE Array AP
Brand: Mist
Test Model: AP21
Sample Status: Engineering sample
Applicant: Mist Systems, Inc.
Test Date: May 17 ~ Dec. 19, 2017
Standards: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :  , **Date:** Dec. 20, 2017
Polly Chien / Specialist

Approved by :  , **Date:** Dec. 20, 2017
Ken Liu / Senior Manager

2 Summary of Test Results

| 47 CFR FCC Part 15, Subpart E (SECTION 15.407) | | | |
|--|--|--------|--|
| FCC Clause | Test Item | Result | Remarks |
| 15.407(b)(6) | AC Power Conducted Emissions | Pass | Meet the requirement of limit. Minimum passing margin is -9.96dB at 0.38600MHz. |
| 15.407(b) (1/2/3/4/6) | Radiated Emissions & Band Edge Measurement | Pass | Meet the requirement of limit. Minimum passing margin is -0.5dB at 5470.00MHz & 5725.00MHz. |
| 15.407(a)(1/2 /3) | Max Average Transmit Power | Pass | Meet the requirement of limit. |
| 15.407(a)(1/2 /3) | Peak Power Spectral Density | Pass | Meet the requirement of limit. |
| 15.407(g) | Frequency Stability | Pass | Meet the requirement of limit. |
| 15.203 | Antenna Requirement | Pass | Antenna connector is IPEX not a standard connector. |

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| Measurement | Frequency | Expanded Uncertainty (k=2) (\pm) |
|------------------------------------|------------------|--------------------------------------|
| Conducted Emissions at mains ports | 150kHz ~ 30MHz | 2.94 dB |
| Radiated Emissions up to 1 GHz | 30MHz ~ 200MHz | 3.63 dB |
| | 200MHz ~ 1000MHz | 3.64 dB |
| Radiated Emissions above 1 GHz | 1GHz ~ 18GHz | 2.29 dB |
| | 18GHz ~ 40GHz | 2.29 dB |

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

| | |
|-----------------------|---|
| Product | Wi-Fi & BLE Array AP |
| Brand | Mist |
| Test Model | AP21 |
| Status of EUT | Engineering sample |
| Power Supply Rating | 12Vdc (adapter) 50~57Vdc (POE) |
| Modulation Type | 256QAM, 64QAM, 16QAM, QPSK, BPSK |
| Modulation Technology | OFDM |
| Transfer Rate | 802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300.0Mbps 802.11ac: up to 866.7Mbps |
| Operating Frequency | 5250 ~ 5350MHz, 5470 ~ 5725MHz |
| Number of Channel | 5250 ~ 5350MHz: 4 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80) 5470 ~ 5725MHz: 12 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 6 for 802.11n (HT40), 802.11ac (VHT40) 3 for 802.11ac (VHT80) |
| Output Power | CDD Mode, 1TX: 5250 ~ 5350MHz: 154.170mW 5470 ~ 5725MHz: 221.820mW CDD Mode, 2TX: 5250 ~ 5350MHz: 241.298mW 5470 ~ 5725MHz: 206.552mW Beamforming Mode 5250 ~ 5350MHz: 150.236mW 5470 ~ 5725MHz: 156.509mW |
| Antenna Type | Refer to Note |
| Antenna Connector | Refer to Note |
| Accessory Device | NA |
| Data Cable Supplied | NA |

Note:

1. This report is prepared for FCC class II permissive change. This report is issued as a supplementary report of the original report no.: RF170505C03-1. The differences compared with original report are updating firmware and adding 5.25GHz to 5.35GHz and 5.47GHz to 5.725GHz by software.

2. The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

| Modulation Mode | TX Function | Beamforming |
|------------------|-------------|-------------|
| 802.11a | 1TX, 2TX | Not Support |
| 802.11n (HT20) | 1TX, 2TX | Support |
| 802.11n (HT40) | 1TX, 2TX | Support |
| 802.11ac (VHT20) | 1TX, 2TX | Support |
| 802.11ac (VHT40) | 1TX, 2TX | Support |
| 802.11ac (VHT80) | 1TX, 2TX | Support |

* The modulation and bandwidth are similar for 802.11n mode for 20MHz/40MHz and 802.11ac mode for 20MHz/40MHz, therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

* For 802.11n and 802.11ac, CDD mode and Beamforming mode are presented in power output test item. For other test items, Beamforming mode is the worst case for final tests after pretesting.

3. There are three radios for the EUT.

| Radio | Antenna | Brand | Model | Function | Band |
|---------|--------------|-------|--------------|--------------|-----------------------------------|
| Radio 1 | WIFI Ant. 1 | WNC | 81EAAH15.GEP | WLAN 2.4G | 2.4G |
| | WIFI Ant. 2 | WNC | 81EAAH15.GEQ | 5G (RX only) | U-NII-1/ U-NII-2A /UNII-2C/UNII-3 |
| Radio 2 | WIFI Ant. 1 | WNC | 81EAAH15.GER | WLAN 5G | U-NII-1/ U-NII-2A /UNII-2C/UNII-3 |
| | WIFI Ant. 2 | WNC | 81EAAH15.GES | | |
| Radio 3 | BT-Omni Ant. | WNC | 81EAAH15.GET | BT LE | 2.4G |

4. The EUT uses following adapter & PoE. (Support unit only)

| Adapter | |
|--------------|---|
| Brand | Channel Well Technology |
| Model | 2ABN036F US |
| Input Power | 100-240Vac~50/60Hz 1.0A |
| Output Power | 12.0Vdc / 3.0A |
| Power Line | 1.45m DC cable without core attached on adapter |

| PoE | |
|--------------|--------------------------|
| Brand | Microsemi |
| Model | PD-9001GR/AT/AC |
| Input Power | 100-240Vac~50/60Hz 0.67A |
| Output Power | 55Vdc / 0.6A |

5. The following antennas were provided to the EUT.

| Antenna Type | PIFA | | | |
|----------------------|------------|---------|---------|---------|
| Antenna Connector | IPEX | | | |
| Gain (dBi) | Frequency | | | |
| | 2.4~2.5GHz | 5.15GHz | 5.55GHz | 5.85GHz |
| Radio 1: WIFI Ant. 1 | 3.43 | 4.85 | 4.86 | 4.91 |
| Radio 1: WIFI Ant. 2 | 3.63 | 3.61 | 4.45 | 4.95 |
| Radio 2: WIFI Ant. 1 | - | 4.93 | 4.51 | 4.96 |
| Radio 2: WIFI Ant. 2 | - | 4.78 | 4.62 | 4.96 |

6. Spurious emission of the simultaneous operation (2.4GHz, 5GHz and BT) has been evaluated and no non-compliance was found.

3.2 Description of Test Modes

For 5250 ~ 5350MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 52 | 5260 MHz | 60 | 5300 MHz |
| 56 | 5280 MHz | 64 | 5320 MHz |

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 54 | 5270 MHz | 62 | 5310 MHz |

1 channel is provided for 802.11ac (VHT80):

| Channel | Frequency |
|---------|-----------|
| 58 | 5290 MHz |

For 5470 ~ 5725MHz

12 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 100 | 5500 MHz | 124 | 5620 MHz |
| 104 | 5520 MHz | 128 | 5640 MHz |
| 108 | 5540 MHz | 132 | 5660 MHz |
| 112 | 5560 MHz | 136 | 5680 MHz |
| 116 | 5580 MHz | 140 | 5700 MHz |
| 120 | 5600 MHz | 144 | 5720 MHz |

6 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 102 | 5510 MHz | 126 | 5630 MHz |
| 110 | 5550 MHz | 134 | 5670 MHz |
| 118 | 5590 MHz | 142 | 5710 MHz |

3 channels are provided for 802.11ac (VHT80):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 106 | 5530 MHz | 138 | 5690 MHz |
| 122 | 5610 MHz | | |

3.2.1 Test Mode Applicability and Tested Channel Detail

| EUT CONFIGURE MODE | APPLICABLE TO | | | | DESCRIPTION |
|--------------------|---------------|-------|-----|------|--------------------|
| | RE \geq 1G | RE<1G | PLC | APCM | |
| A | √ | √ | √ | √ | Power from adapter |
| B | - | √ | √ | - | Power from PoE |

Where **RE \geq 1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on X-plane.
2. "-" means no effect.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT Configure Mode | Mode | Frequency Band (MHz) | Available Channel | Tested Channel | Modulation Technology | Data Rate (Mbps) | Remark |
|--------------------|------------------|----------------------|-------------------|--------------------|-----------------------|------------------|-----------|
| A | 802.11a | 5250-5350 | 52 to 64 | 52, 60, 64 | OFDM | 6.0 | 1TX / 2TX |
| | 802.11n (HT20) | | 52 to 64 | 52, 60, 64 | OFDM | 6.5 / 7.2 | 1TX / 2TX |
| | 802.11n (HT40) | | 54 to 62 | 54, 62 | OFDM | 13.5 / 15.0 | 1TX / 2TX |
| | 802.11ac (VHT80) | | 58 | 58 | OFDM | 29.3 / 65.0 | 1TX / 2TX |
| A | 802.11a | 5470-5725 | 100 to 144 | 100, 116, 140, 144 | OFDM | 6.0 | 1TX / 2TX |
| | 802.11n (HT20) | | 100 to 144 | 100, 116, 140, 142 | OFDM | 6.5 / 7.2 | 1TX / 2TX |
| | 802.11n (HT40) | | 102 to 142 | 102, 110, 134, 142 | OFDM | 13.5 / 15.0 | 1TX / 2TX |
| | 802.11ac (VHT80) | | 106 to 138 | 106, 122, 138 | OFDM | 29.3 / 65.0 | 1TX / 2TX |

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT Configure Mode | Mode | Frequency Band (MHz) | Available Channel | Tested Channel | Modulation Technology | Data Rate (Mbps) | Remark |
|--------------------|---------|----------------------|-------------------|----------------|-----------------------|------------------|--------|
| A, B | 802.11a | 5250-5350 | 52 to 64 | 52 | OFDM | 6.0 | 2TX |
| | | 5470-5725 | 100 to 140 | | OFDM | 6.0 | 2TX |

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT Configure Mode | Mode | Frequency Band (MHz) | Available Channel | Tested Channel | Modulation Technology | Data Rate (Mbps) | Remark |
|--------------------|---------|----------------------|-------------------|----------------|-----------------------|------------------|--------|
| A, B | 802.11a | 5250-5350 | 52 to 64 | 52 | OFDM | 6.0 | 2TX |
| | | 5470-5725 | 100 to 140 | | OFDM | 6.0 | 2TX |

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT Configure Mode | Mode | Frequency Band (MHz) | Available Channel | Tested Channel | Modulation Technology | Data Rate (Mbps) | Remark |
|--------------------|------------------|----------------------|-------------------|--------------------|-----------------------|------------------|-----------|
| A | 802.11a | 5250-5350 | 52 to 64 | 52, 60, 64 | OFDM | 6.0 | 1TX / 2TX |
| | 802.11n (HT20) | | 52 to 64 | 52, 60, 64 | OFDM | 6.5 / 7.2 | 1TX / 2TX |
| | 802.11n (HT40) | | 54 to 62 | 54, 62 | OFDM | 13.5 / 15.0 | 1TX / 2TX |
| | 802.11ac (VHT80) | | 58 | 58 | OFDM | 29.3 / 65.0 | 1TX / 2TX |
| A | 802.11a | 5470-5725 | 100 to 144 | 100, 116, 140, 144 | OFDM | 6.0 | 1TX / 2TX |
| | 802.11n (HT20) | | 100 to 144 | 100, 116, 140, 142 | OFDM | 6.5 / 7.2 | 1TX / 2TX |
| | 802.11n (HT40) | | 102 to 142 | 102, 110, 134, 142 | OFDM | 13.5 / 15.0 | 1TX / 2TX |
| | 802.11ac (VHT80) | | 106 to 138 | 106, 122, 138 | OFDM | 29.3 / 65.0 | 1TX / 2TX |

Test Condition:

| APPLICABLE TO | ENVIRONMENTAL CONDITIONS | INPUT POWER | TESTED BY |
|------------------------------|--|-----------------------|---------------------------------------|
| RE\geq1G | 20 deg. C, 69% RH 25 deg. C, 70% RH | 120Vac, 60Hz | Bayu Chen, Bond Tseng, Luis Lee |
| RE$<$1G | 20 deg. C, 69% RH | 120Vac, 60Hz 55Vdc | Matthew Yang |
| PLC | 25 deg. C, 70% RH | 120Vac, 60Hz 55Vdc | Matthew Yang |
| APCM | 25 deg. C, 60% RH | 120Vac, 60Hz | Ted Wu, Chris Lin |

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is > 98%, duty factor is not required

Duty cycle of test signal is < 98 %, duty factor is required


1TX

802.11a: Duty cycle = $2.057/2.082 = 0.988$

802.11n (HT20): Duty cycle = $1.910/1.950 = 0.979$, Duty factor = $10 * \log(1/0.979) = 0.09$

802.11n (HT40): Duty cycle = $0.941/0.963 = 0.977$, Duty factor = $10 * \log(1/0.977) = 0.10$

802.11ac (VHT80): Duty cycle = $0.458/0.496 = 0.923$, Duty factor = $10 * \log(1/0.923) = 0.35$

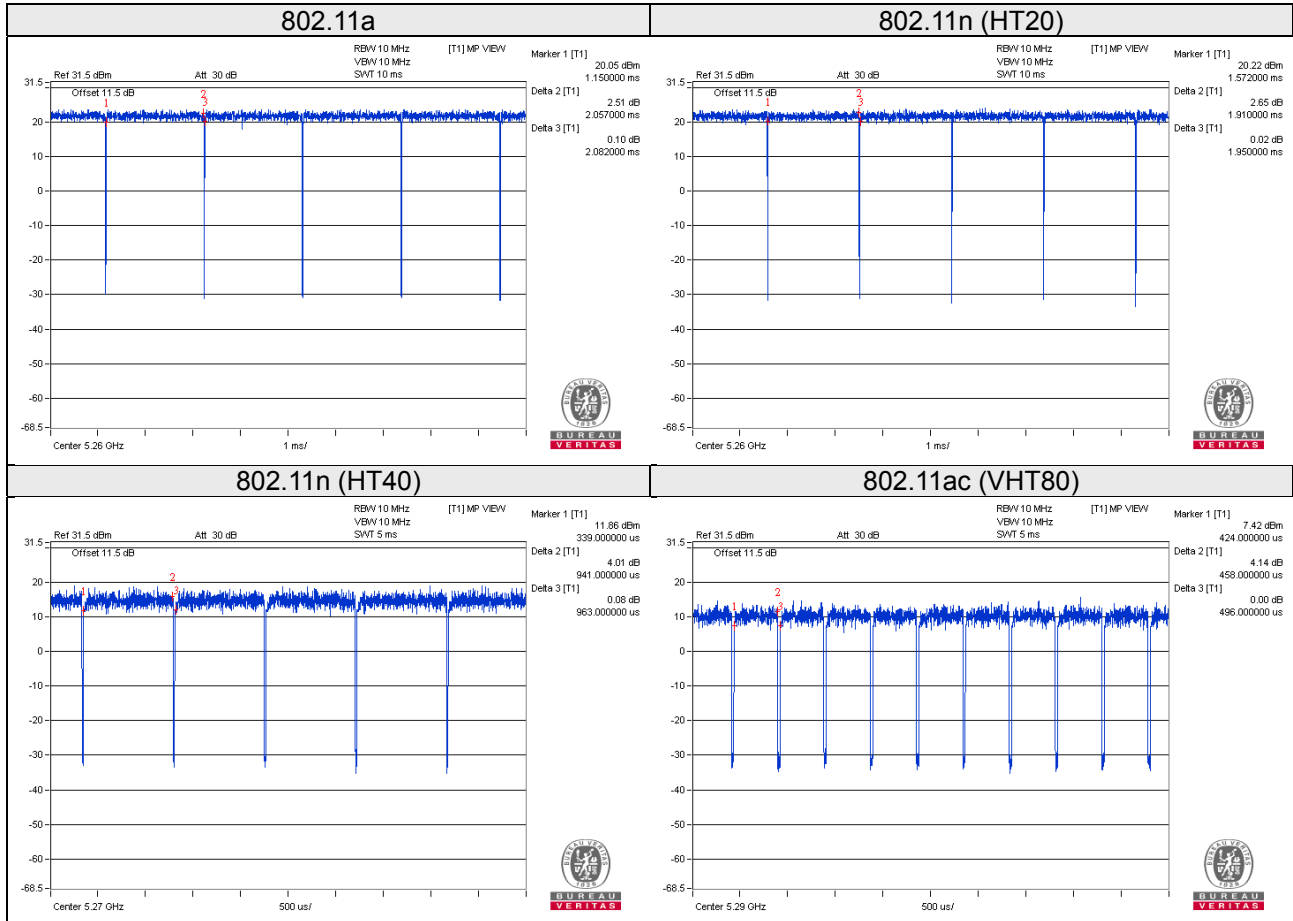


2TX

802.11a: Duty cycle = $2.060/2.080 = 0.990$

802.11n (HT20): Duty cycle = $1.920/1.960 = 0.980$

802.11n (HT40): Duty cycle = $0.941/0.969 = 0.971$, Duty factor = $10 * \log(1/0.971) = 0.13$

802.11ac (VHT80): Duty cycle = $0.459/0.490 = 0.937$, Duty factor = $10 * \log(1/0.937) = 0.28$

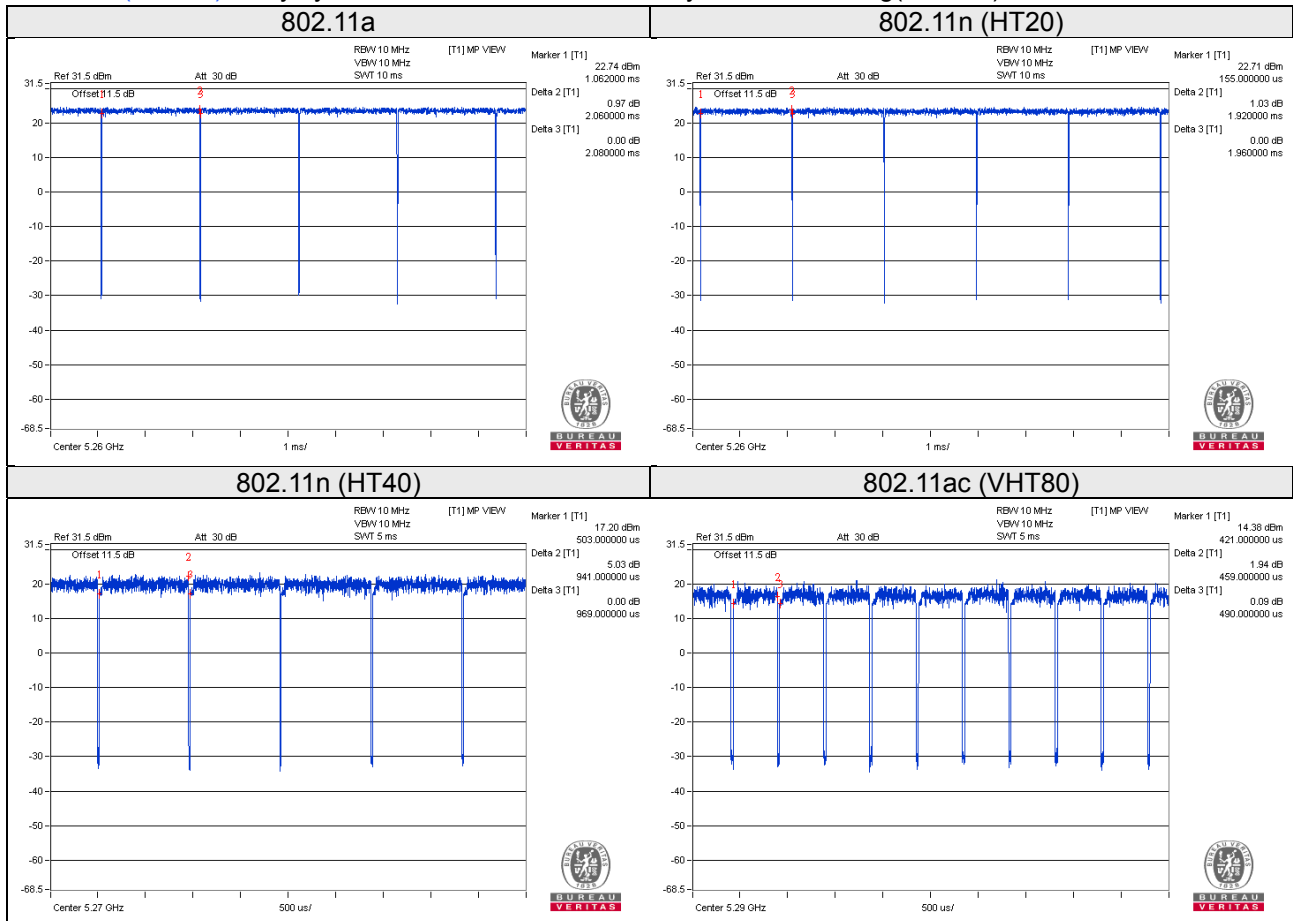

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| ID | Product | Brand | Model No. | Serial No. | FCC ID | Remarks |
|----|----------|-------------------------|-----------------|------------|------------------|--------------------|
| A. | Notebook | DELL | E5410 | 6RP2YM1 | FCC DoC Approved | - |
| B. | Adapter | Channel Well Technology | 2ABN036F US | N/A | N/A | Provided by client |
| C. | Load | N/A | N/A | N/A | N/A | - |
| D. | PoE | Microsemi | PD-9001GR/AT/AC | N/A | N/A | Provided by client |


Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Items A acted as communication partners to transfer data.


| ID | Descriptions | Qty. | Length (m) | Shielding (Yes/No) | Cores (Qty.) | Remarks |
|----|--------------|------|------------|--------------------|--------------|---------------------|
| 1. | RJ45 cable | 1 | 10 | N | 0 | - |
| 2. | RJ45 cable | 1 | 1.8 | N | 0 | - |
| 3. | DC cable | 1 | 1.45 | - | 0 | attached on adapter |
| 4. | RJ45 cable | 1 | 3 | N | 0 | - |

3.4.1 Configuration of System under Test

Test Mode A

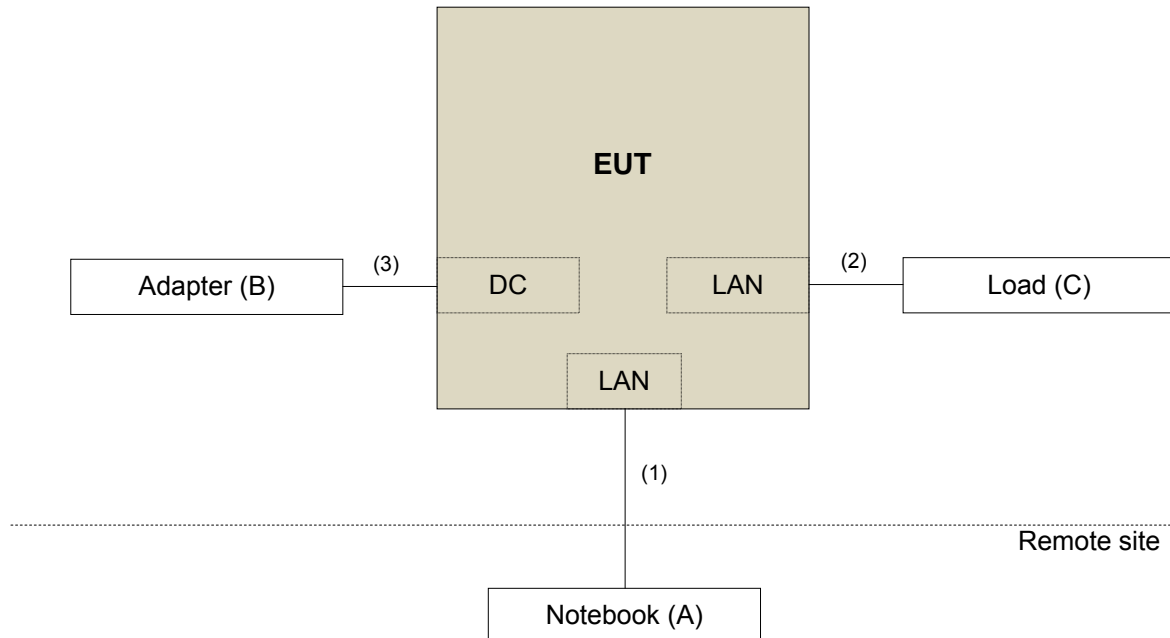

Test Mode B

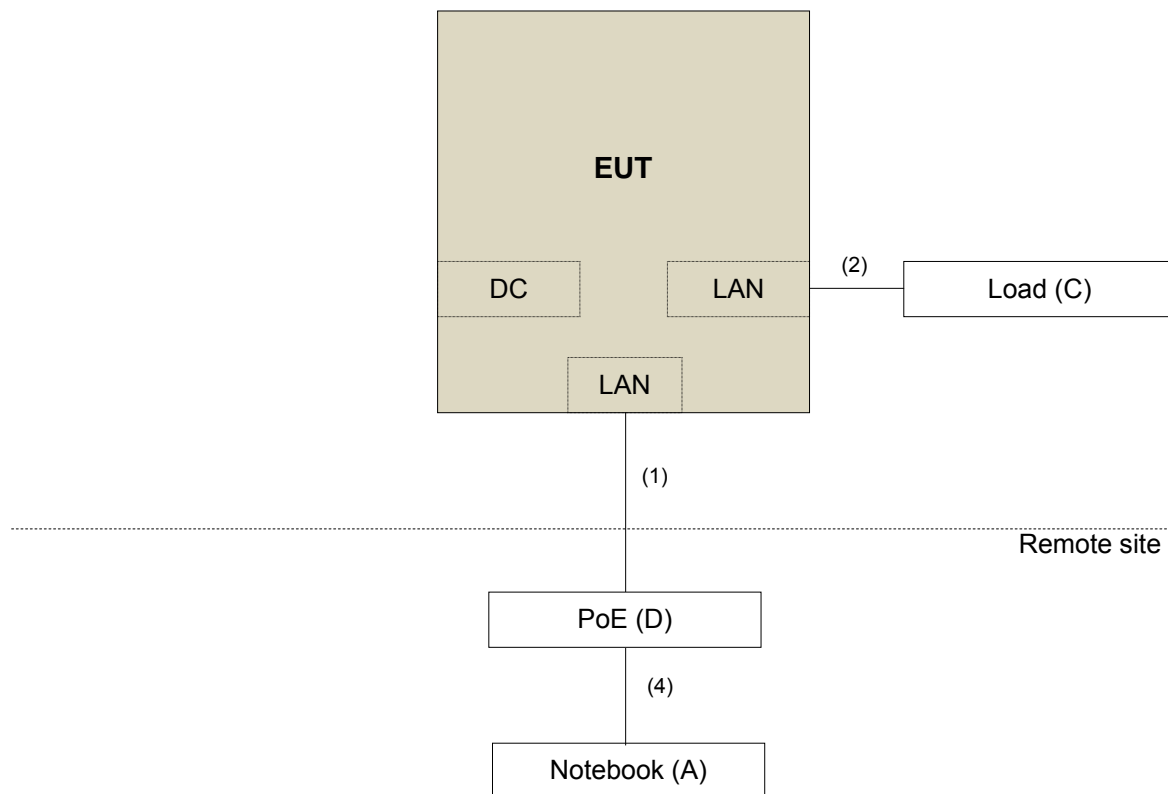

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

KDB 789033 D02 General UNII Test Procedure New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490 | 2400/F(kHz) | 300 |
| 0.490 ~ 1.705 | 24000/F(kHz) | 30 |
| 1.705 ~ 30.0 | 30 | 30 |
| 30 ~ 88 | 100 | 3 |
| 88 ~ 216 | 150 | 3 |
| 216 ~ 960 | 200 | 3 |
| Above 960 | 500 | 3 |

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of Unwanted Emission Out of the Restricted Bands

| Applicable To | | Limit | |
|--|---|---|---|
| 789033 D02 General UNII Test Procedure New Rules v02r01 | | Field Strength at 3m | |
| | | PK:74 (dBuV/m) | AV:54 (dBuV/m) |
| Frequency Band | Applicable To | EIRP Limit | Equivalent Field Strength at 3m |
| 5150~5250 MHz | 15.407(b)(1) | PK:-27 (dBm/MHz) | PK:68.2(dBuV/m) |
| 5250~5350 MHz | 15.407(b)(2) | | |
| 5470~5725 MHz | 15.407(b)(3) | | |
| 5725~5850 MHz | <input checked="" type="checkbox"/> 15.407(b)(4)(i) | PK:-27 (dBm/MHz) ^{*1} PK:10 (dBm/MHz) ^{*2} PK:15.6 (dBm/MHz) ^{*3} PK:27 (dBm/MHz) ^{*4} | PK: 68.2(dBuV/m) ^{*1} PK:105.2 (dBuV/m) ^{*2} PK: 110.8(dBuV/m) ^{*3} PK:122.2 (dBuV/m) ^{*4} |
| | <input type="checkbox"/> 15.407(b)(4)(ii) | Emission limits in section 15.247(d) | |
| ^{*1} beyond 75 MHz or more above of the band edge. | | ^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above. | |
| ^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above. | | ^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. | |

NOTE: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$

4.1.2 Test Instruments

Tested data: May 17 ~ Jul. 20, 2017 & Dec. 18 ~ Dec. 19, 2017

| Description & Manufacturer | Model No. | Serial No. | Cal. Date | Cal. Due |
|---|------------------------------|-----------------------|---------------|---------------|
| Test Receiver ROHDE & SCHWARZ | ESCI | 100424 | Oct. 24, 2016 | Oct. 23, 2017 |
| | | | Oct. 17, 2017 | Oct. 16, 2018 |
| Spectrum Analyzer ROHDE & SCHWARZ | FSP40 | 100040 | Aug. 16, 2016 | Aug. 15, 2017 |
| | | | Aug. 18, 2017 | Aug. 17, 2018 |
| BILOG Antenna SCHWARZBECK | VULB9168 | 9168-155 | Dec. 28, 2016 | Dec. 27, 2017 |
| HORN Antenna SCHWARZBECK | BBHA 9120D | 9120D-1170 | Dec. 15, 2016 | Dec. 14, 2017 |
| HORN Antenna SCHWARZBECK | BBHA 9170 | BBHA9170241 | Dec. 14, 2016 | Dec. 13, 2017 |
| Loop Antenna | EM-6879 | 269 | Aug. 11, 2016 | Aug. 10, 2017 |
| | | | Aug. 11, 2017 | Aug. 10, 2018 |
| Preamplifier Agilent | 8449B | 3008A01960 | Aug. 09, 2016 | Aug. 08, 2017 |
| | | | Aug. 08, 2017 | Aug. 07, 2018 |
| Preamplifier Agilent | 8447D | 2944A10631 | Aug. 09, 2016 | Aug. 08, 2017 |
| | | | Aug. 08, 2017 | Aug. 07, 2018 |
| RF signal cable HUBER+SUHNER | SUCOFLEX 104 | MY 13380+295012/04 | Aug. 09, 2016 | Aug. 08, 2017 |
| | | | Aug. 08, 2017 | Aug. 07, 2018 |
| RF signal cable HUBER+SUHNER | SUCOFLEX 104 | Cable-CH4-03 (250724) | Aug. 09, 2016 | Aug. 08, 2017 |
| | | | Aug. 08, 2017 | Aug. 07, 2018 |
| Software BV ADT | ADT_Radiated_ V7.6.15.9.4 | NA | NA | NA |
| Antenna Tower inn-co GmbH | MA 4000 | 010303 | NA | NA |
| Antenna Tower Controller BV ADT | AT100 | AT93021703 | NA | NA |
| Turn Table BV ADT | TT100 | TT93021703 | NA | NA |
| Turn Table Controller BV ADT | SC100 | SC93021703 | NA | NA |
| 26GHz ~ 40GHz Amplifier | EM26400 | 815221 | Oct. 17, 2016 | Oct. 16, 2017 |
| | 8449B | 3008A1960 | Aug. 08, 2017 | Aug. 07, 2018 |
| High Speed Peak Power Meter | ML2495A | 0824012 | Aug. 11, 2016 | Aug. 10, 2017 |
| | | | Aug. 18, 2017 | Aug. 17, 2018 |
| Power Sensor | MA2411B | 0738171 | Aug. 11, 2016 | Aug. 10, 2017 |
| | | | Aug. 18, 2017 | Aug. 17, 2018 |
| WIT Standard Temperature And Humidity Chamber | TH-4S-C | W981030 | Jun. 08, 2016 | Jun. 07, 2017 |
| | | | Jun. 07, 2017 | Jun. 06, 2018 |

- Note:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 4.
 3. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Designation Number is TW0003. The number will be varied with the Lab location and scope as attached.
 5. The IC Site Registration No. is IC7450F-4.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

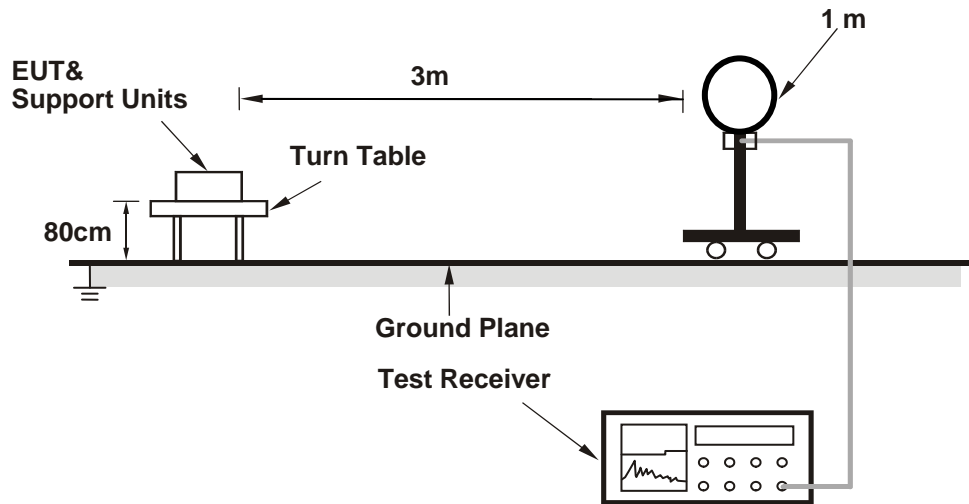

For Radiated emission 30MHz to 1GHz

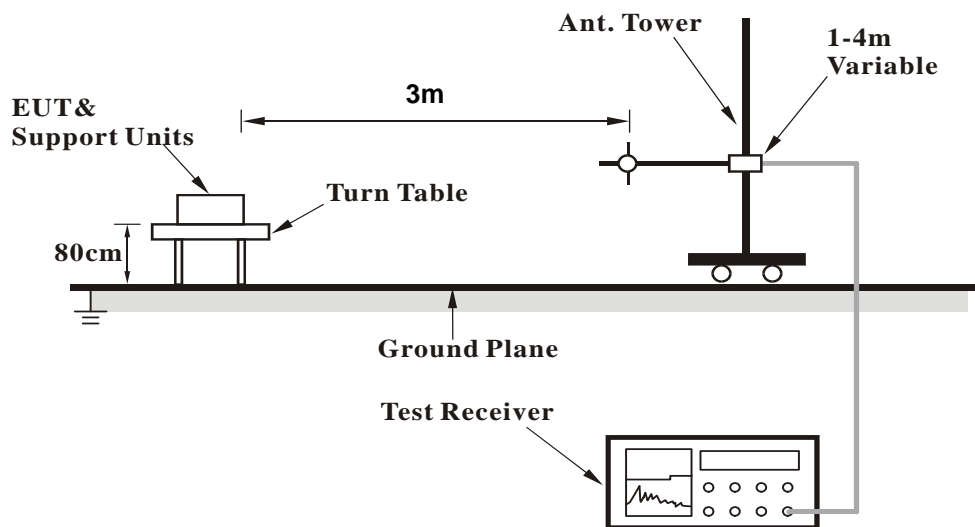

For Radiated emission above 1GHz

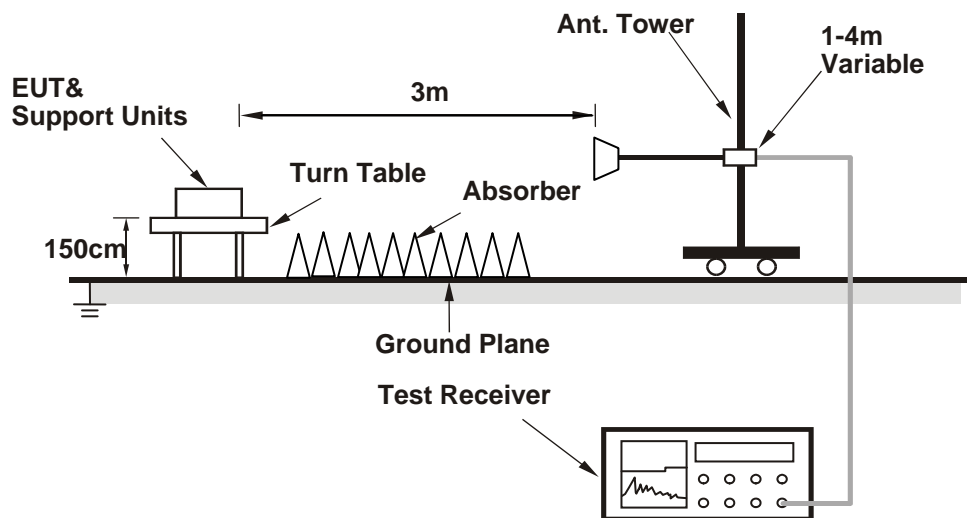

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Prepared a notebook to act as a communication partner and placed it outside of testing area.
- c. The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- d. The communication partner sent data to EUT by command "PING".
- e. The necessary accessories enable the system in full functions.

4.1.7 Test Results

Above 1GHz data:

1TX

802.11a

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 52 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5150.00 | 55.5 PK | 74.0 | -18.5 | 1.85 H | 210 | 53.40 | 2.10 |
| 2 | 5150.00 | 43.0 AV | 54.0 | -11.0 | 1.85 H | 210 | 40.90 | 2.10 |
| 3 | *5260.00 | 102.6 PK | | | 1.85 H | 210 | 63.50 | 39.10 |
| 4 | *5260.00 | 92.6 AV | | | 1.85 H | 210 | 53.50 | 39.10 |
| 5 | 5420.00 | 55.4 PK | 74.0 | -18.6 | 1.96 H | 227 | 52.70 | 2.70 |
| 6 | 5420.00 | 43.4 AV | 54.0 | -10.6 | 1.96 H | 227 | 40.70 | 2.70 |
| 7 | #10520.00 | 57.9 PK | 74.0 | -16.1 | 3.32 H | 164 | 43.70 | 14.20 |
| 8 | #10520.00 | 44.8 AV | 54.0 | -9.2 | 3.32 H | 164 | 30.60 | 14.20 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5150.00 | 57.3 PK | 74.0 | -16.7 | 2.94 V | 335 | 55.20 | 2.10 |
| 2 | 5150.00 | 45.7 AV | 54.0 | -8.3 | 2.94 V | 335 | 43.60 | 2.10 |
| 3 | *5260.00 | 113.7 PK | | | 2.94 V | 335 | 74.60 | 39.10 |
| 4 | *5260.00 | 103.6 AV | | | 2.94 V | 335 | 64.50 | 39.10 |
| 5 | 5420.00 | 61.3 PK | 74.0 | -12.7 | 2.99 V | 326 | 58.60 | 2.70 |
| 6 | 5420.00 | 49.9 AV | 54.0 | -4.1 | 2.99 V | 326 | 47.20 | 2.70 |
| 7 | #10520.00 | 58.9 PK | 74.0 | -15.1 | 1.79 V | 335 | 44.70 | 14.20 |
| 8 | #10520.00 | 46.6 AV | 54.0 | -7.4 | 1.79 V | 335 | 32.40 | 14.20 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 60 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5300.00 | 103.0 PK | | | 1.93 H | 244 | 63.80 | 39.20 |
| 2 | *5300.00 | 92.7 AV | | | 1.93 H | 244 | 53.50 | 39.20 |
| 3 | 5380.00 | 57.3 PK | 74.0 | -16.7 | 1.94 H | 214 | 54.70 | 2.60 |
| 4 | 5380.00 | 47.0 AV | 54.0 | -7.0 | 1.94 H | 214 | 44.40 | 2.60 |
| 5 | 10600.00 | 58.5 PK | 74.0 | -15.5 | 1.32 H | 57 | 43.80 | 14.70 |
| 6 | 10600.00 | 45.6 AV | 54.0 | -8.4 | 1.32 H | 57 | 30.90 | 14.70 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5300.00 | 111.4 PK | | | 3.39 V | 333 | 72.20 | 39.20 |
| 2 | *5300.00 | 101.4 AV | | | 3.39 V | 333 | 62.20 | 39.20 |
| 3 | 5380.00 | 63.3 PK | 74.0 | -10.7 | 2.97 V | 330 | 60.70 | 2.60 |
| 4 | 5380.00 | 53.2 AV | 54.0 | -0.8 | 2.97 V | 330 | 50.60 | 2.60 |
| 5 | 10600.00 | 59.1 PK | 74.0 | -14.9 | 1.75 V | 224 | 44.40 | 14.70 |
| 6 | 10600.00 | 46.9 AV | 54.0 | -7.1 | 1.75 V | 224 | 32.20 | 14.70 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 64 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5320.00 | 102.5 PK | | | 1.87 H | 236 | 63.30 | 39.20 |
| 2 | *5320.00 | 92.8 AV | | | 1.87 H | 236 | 53.60 | 39.20 |
| 3 | 5400.00 | 60.3 PK | 74.0 | -13.7 | 1.95 H | 334 | 57.60 | 2.70 |
| 4 | 5400.00 | 50.2 AV | 54.0 | -3.8 | 1.95 H | 334 | 47.50 | 2.70 |
| 5 | 10640.00 | 57.9 PK | 74.0 | -16.1 | 1.73 H | 359 | 43.20 | 14.70 |
| 6 | 10640.00 | 45.3 AV | 54.0 | -8.7 | 1.73 H | 359 | 30.60 | 14.70 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5320.00 | 111.8 PK | | | 3.38 V | 332 | 72.60 | 39.20 |
| 2 | *5320.00 | 102.1 AV | | | 3.38 V | 332 | 62.90 | 39.20 |
| 3 | 5400.00 | 66.3 PK | 74.0 | -7.7 | 2.97 V | 326 | 63.60 | 2.70 |
| 4 | 5400.00 | 53.2 AV | 54.0 | -0.8 | 2.97 V | 326 | 50.50 | 2.70 |
| 5 | 10640.00 | 59.3 PK | 74.0 | -14.7 | 3.26 V | 226 | 44.60 | 14.70 |
| 6 | 10640.00 | 46.4 AV | 54.0 | -7.6 | 3.26 V | 226 | 31.70 | 14.70 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 100 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5420.00 | 59.3 PK | 74.0 | -14.7 | 2.41 H | 183 | 52.70 | 6.60 |
| 2 | 5420.00 | 46.9 AV | 54.0 | -7.1 | 2.41 H | 183 | 40.30 | 6.60 |
| 3 | 5460.00 | 59.5 PK | 74.0 | -14.5 | 2.64 H | 157 | 52.80 | 6.70 |
| 4 | 5460.00 | 45.9 AV | 54.0 | -8.1 | 2.64 H | 157 | 39.20 | 6.70 |
| 5 | #5470.00 | 63.0 PK | 74.0 | -11.0 | 2.64 H | 157 | 56.30 | 6.70 |
| 6 | #5470.00 | 47.5 AV | 54.0 | -6.5 | 2.64 H | 157 | 40.80 | 6.70 |
| 7 | *5500.00 | 107.0 PK | | | 2.64 H | 157 | 66.10 | 40.90 |
| 8 | *5500.00 | 96.9 AV | | | 2.64 H | 157 | 56.00 | 40.90 |
| 9 | 11000.00 | 60.3 PK | 74.0 | -13.7 | 1.98 H | 241 | 41.00 | 19.30 |
| 10 | 11000.00 | 46.8 AV | 54.0 | -7.2 | 1.98 H | 241 | 27.50 | 19.30 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5420.00 | 64.1 PK | 74.0 | -9.9 | 2.81 V | 319 | 57.50 | 6.60 |
| 2 | 5420.00 | 52.9 AV | 54.0 | -1.1 | 2.81 V | 319 | 46.30 | 6.60 |
| 3 | 5460.00 | 64.7 PK | 74.0 | -9.3 | 3.01 V | 321 | 58.00 | 6.70 |
| 4 | 5460.00 | 48.3 AV | 54.0 | -5.7 | 3.01 V | 321 | 41.60 | 6.70 |
| 5 | #5470.00 | 71.6 PK | 74.0 | -2.4 | 3.01 V | 321 | 64.90 | 6.70 |
| 6 | #5470.00 | 53.1 AV | 54.0 | -0.9 | 3.01 V | 321 | 46.40 | 6.70 |
| 7 | *5500.00 | 115.0 PK | | | 3.01 V | 321 | 74.10 | 40.90 |
| 8 | *5500.00 | 104.9 AV | | | 3.01 V | 321 | 64.00 | 40.90 |
| 9 | 11000.00 | 60.5 PK | 74.0 | -13.5 | 1.52 V | 311 | 41.20 | 19.30 |
| 10 | 11000.00 | 47.0 AV | 54.0 | -7.0 | 1.52 V | 311 | 27.70 | 19.30 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 116 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5580.00 | 108.0 PK | | | 2.12 H | 156 | 67.00 | 41.00 |
| 2 | *5580.00 | 98.3 AV | | | 2.12 H | 156 | 57.30 | 41.00 |
| 3 | 11160.00 | 61.2 PK | 74.0 | -12.8 | 1.58 H | 239 | 41.40 | 19.80 |
| 4 | 11160.00 | 47.2 AV | 54.0 | -6.8 | 1.58 H | 239 | 27.40 | 19.80 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5580.00 | 116.0 PK | | | 3.16 V | 328 | 75.00 | 41.00 |
| 2 | *5580.00 | 106.5 AV | | | 3.16 V | 328 | 65.50 | 41.00 |
| 3 | 11160.00 | 61.3 PK | 74.0 | -12.7 | 1.29 V | 325 | 41.50 | 19.80 |
| 4 | 11160.00 | 47.7 AV | 54.0 | -6.3 | 1.29 V | 325 | 27.90 | 19.80 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 140 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5700.00 | 103.8 PK | | | 2.96 H | 342 | 62.30 | 41.50 |
| 2 | *5700.00 | 93.6 AV | | | 2.96 H | 342 | 52.10 | 41.50 |
| 3 | #5725.00 | 61.6 PK | 74.0 | -12.4 | 2.96 H | 342 | 54.30 | 7.30 |
| 4 | #5725.00 | 47.5 AV | 54.0 | -6.5 | 2.96 H | 342 | 40.20 | 7.30 |
| 5 | 11400.00 | 63.1 PK | 74.0 | -10.9 | 1.75 H | 153 | 42.70 | 20.40 |
| 6 | 11400.00 | 48.8 AV | 54.0 | -5.2 | 1.75 H | 153 | 28.40 | 20.40 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5700.00 | 110.8 PK | | | 2.91 V | 316 | 69.30 | 41.50 |
| 2 | *5700.00 | 100.5 AV | | | 2.91 V | 316 | 59.00 | 41.50 |
| 3 | #5725.00 | 69.0 PK | 74.0 | -5.0 | 2.91 V | 316 | 61.70 | 7.30 |
| 4 | #5725.00 | 53.1 AV | 54.0 | -0.9 | 2.91 V | 316 | 45.80 | 7.30 |
| 5 | 11400.00 | 63.4 PK | 74.0 | -10.6 | 2.93 V | 187 | 43.00 | 20.40 |
| 6 | 11400.00 | 49.0 AV | 54.0 | -5.0 | 2.93 V | 187 | 28.60 | 20.40 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 144 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | #5470.00 | 56.2 PK | 74.0 | -17.8 | 2.19 H | 83 | 53.30 | 2.90 |
| 2 | #5470.00 | 43.7 AV | 54.0 | -10.3 | 2.19 H | 83 | 40.80 | 2.90 |
| 3 | *5720.00 | 112.1 PK | | | 2.28 H | 87 | 70.50 | 41.60 |
| 4 | *5720.00 | 101.7 AV | | | 2.28 H | 87 | 60.10 | 41.60 |
| 5 | #5850.00 | 57.8 PK | 74.0 | -16.2 | 2.36 H | 105 | 54.10 | 3.70 |
| 6 | #5850.00 | 44.0 AV | 54.0 | -10.0 | 2.36 H | 105 | 40.30 | 3.70 |
| 7 | 11440.00 | 60.5 PK | 74.0 | -13.5 | 2.15 H | 120 | 44.20 | 16.30 |
| 8 | 11440.00 | 49.4 AV | 54.0 | -4.6 | 2.15 H | 120 | 33.10 | 16.30 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | #5470.00 | 56.6 PK | 74.0 | -17.4 | 2.11 V | 106 | 53.70 | 2.90 |
| 2 | #5470.00 | 43.4 AV | 54.0 | -10.6 | 2.11 V | 106 | 40.50 | 2.90 |
| 3 | *5720.00 | 109.6 PK | | | 2.30 V | 96 | 68.00 | 41.60 |
| 4 | *5720.00 | 99.3 AV | | | 2.30 V | 96 | 57.70 | 41.60 |
| 5 | #5850.00 | 57.3 PK | 74.0 | -16.7 | 2.41 V | 119 | 53.60 | 3.70 |
| 6 | #5850.00 | 43.7 AV | 54.0 | -10.3 | 2.41 V | 119 | 40.00 | 3.70 |
| 7 | 11440.00 | 69.2 PK | 74.0 | -4.8 | 2.39 V | 17 | 52.90 | 16.30 |
| 8 | 11440.00 | 50.2 AV | 54.0 | -3.8 | 2.39 V | 17 | 33.90 | 16.30 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT20)

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 52 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5097.00 | 53.4 PK | 74.0 | -20.6 | 2.23 H | 239 | 51.40 | 2.00 |
| 2 | 5097.00 | 43.3 AV | 54.0 | -10.7 | 2.23 H | 239 | 41.30 | 2.00 |
| 3 | *5260.00 | 103.7 PK | | | 2.33 H | 246 | 64.60 | 39.10 |
| 4 | *5260.00 | 93.3 AV | | | 2.33 H | 246 | 54.20 | 39.10 |
| 5 | #10520.00 | 57.7 PK | 74.0 | -16.3 | 2.04 H | 23 | 43.50 | 14.20 |
| 6 | #10520.00 | 45.6 AV | 54.0 | -8.4 | 2.04 H | 23 | 31.40 | 14.20 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5097.00 | 57.0 PK | 74.0 | -17.0 | 3.29 V | 342 | 55.00 | 2.00 |
| 2 | 5097.00 | 44.7 AV | 54.0 | -9.3 | 3.29 V | 342 | 42.70 | 2.00 |
| 3 | *5260.00 | 113.0 PK | | | 3.23 V | 339 | 73.90 | 39.10 |
| 4 | *5260.00 | 102.2 AV | | | 3.23 V | 339 | 63.10 | 39.10 |
| 5 | #10520.00 | 59.0 PK | 74.0 | -15.0 | 1.75 V | 334 | 44.80 | 14.20 |
| 6 | #10520.00 | 46.3 AV | 54.0 | -7.7 | 1.75 V | 334 | 32.10 | 14.20 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 60 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5300.00 | 103.8 PK | | | 2.10 H | 165 | 64.60 | 39.20 |
| 2 | *5300.00 | 94.0 AV | | | 2.10 H | 165 | 54.80 | 39.20 |
| 3 | 5380.00 | 60.0 PK | 74.0 | -14.0 | 2.04 H | 331 | 57.40 | 2.60 |
| 4 | 5380.00 | 48.9 AV | 54.0 | -5.1 | 2.04 H | 331 | 46.30 | 2.60 |
| 5 | 10600.00 | 58.0 PK | 74.0 | -16.0 | 1.75 H | 13 | 43.30 | 14.70 |
| 6 | 10600.00 | 45.0 AV | 54.0 | -9.0 | 1.75 H | 13 | 30.30 | 14.70 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5300.00 | 112.7 PK | | | 3.55 V | 334 | 73.50 | 39.20 |
| 2 | *5300.00 | 102.3 AV | | | 3.55 V | 334 | 63.10 | 39.20 |
| 3 | 5380.00 | 63.1 PK | 74.0 | -10.9 | 2.93 V | 327 | 60.50 | 2.60 |
| 4 | 5380.00 | 52.2 AV | 54.0 | -1.8 | 2.93 V | 327 | 49.60 | 2.60 |
| 5 | 10600.00 | 59.8 PK | 74.0 | -14.2 | 1.74 V | 87 | 45.10 | 14.70 |
| 6 | 10600.00 | 47.2 AV | 54.0 | -6.8 | 1.74 V | 87 | 32.50 | 14.70 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 64 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5320.00 | 102.9 PK | | | 2.17 H | 261 | 63.70 | 39.20 |
| 2 | *5320.00 | 92.4 AV | | | 2.17 H | 261 | 53.20 | 39.20 |
| 3 | 5400.00 | 57.0 PK | 74.0 | -17.0 | 2.47 H | 158 | 54.30 | 2.70 |
| 4 | 5400.00 | 48.2 AV | 54.0 | -5.8 | 2.47 H | 158 | 45.50 | 2.70 |
| 5 | 10640.00 | 58.0 PK | 74.0 | -16.0 | 2.12 H | 86 | 43.30 | 14.70 |
| 6 | 10640.00 | 45.5 AV | 54.0 | -8.5 | 2.12 H | 86 | 30.80 | 14.70 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5320.00 | 111.7 PK | | | 3.33 V | 327 | 72.50 | 39.20 |
| 2 | *5320.00 | 101.1 AV | | | 3.33 V | 327 | 61.90 | 39.20 |
| 3 | 5400.00 | 73.2 PK | 74.0 | -0.8 | 3.12 V | 323 | 70.50 | 2.70 |
| 4 | 5400.00 | 52.1 AV | 54.0 | -1.9 | 3.12 V | 323 | 49.40 | 2.70 |
| 5 | 10640.00 | 59.1 PK | 74.0 | -14.9 | 1.29 V | 33 | 44.40 | 14.70 |
| 6 | 10640.00 | 46.4 AV | 54.0 | -7.6 | 1.29 V | 33 | 31.70 | 14.70 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 100 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5420.00 | 59.7 PK | 74.0 | -14.3 | 2.55 H | 287 | 53.10 | 6.60 |
| 2 | 5420.00 | 46.5 AV | 54.0 | -7.5 | 2.55 H | 287 | 39.90 | 6.60 |
| 3 | 5460.00 | 62.0 PK | 74.0 | -12.0 | 2.38 H | 156 | 55.30 | 6.70 |
| 4 | 5460.00 | 45.4 AV | 54.0 | -8.6 | 2.38 H | 156 | 38.70 | 6.70 |
| 5 | #5470.00 | 63.8 PK | 74.0 | -10.2 | 2.38 H | 156 | 57.10 | 6.70 |
| 6 | #5470.00 | 47.8 AV | 54.0 | -6.2 | 2.38 H | 156 | 41.10 | 6.70 |
| 7 | *5500.00 | 107.0 PK | | | 2.38 H | 156 | 66.10 | 40.90 |
| 8 | *5500.00 | 96.2 AV | | | 2.38 H | 156 | 55.30 | 40.90 |
| 9 | 11000.00 | 59.4 PK | 74.0 | -14.6 | 2.67 H | 334 | 40.10 | 19.30 |
| 10 | 11000.00 | 46.5 AV | 54.0 | -7.5 | 2.67 H | 334 | 27.20 | 19.30 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5420.00 | 63.1 PK | 74.0 | -10.9 | 2.38 V | 309 | 56.50 | 6.60 |
| 2 | 5420.00 | 51.3 AV | 54.0 | -2.7 | 2.38 V | 309 | 44.70 | 6.60 |
| 3 | 5460.00 | 66.9 PK | 74.0 | -7.1 | 2.56 V | 322 | 60.20 | 6.70 |
| 4 | 5460.00 | 48.0 AV | 54.0 | -6.0 | 2.56 V | 322 | 41.30 | 6.70 |
| 5 | #5470.00 | 70.0 PK | 74.0 | -4.0 | 2.56 V | 322 | 63.30 | 6.70 |
| 6 | #5470.00 | 52.8 AV | 54.0 | -1.2 | 2.56 V | 322 | 46.10 | 6.70 |
| 7 | *5500.00 | 114.7 PK | | | 2.56 V | 322 | 73.80 | 40.90 |
| 8 | *5500.00 | 104.1 AV | | | 2.56 V | 322 | 63.20 | 40.90 |
| 9 | 11000.00 | 59.6 PK | 74.0 | -14.4 | 1.29 V | 234 | 40.30 | 19.30 |
| 10 | 11000.00 | 46.8 AV | 54.0 | -7.2 | 1.29 V | 234 | 27.50 | 19.30 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 116 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5580.00 | 108.6 PK | | | 2.11 H | 159 | 67.60 | 41.00 |
| 2 | *5580.00 | 98.5 AV | | | 2.11 H | 159 | 57.50 | 41.00 |
| 3 | 11160.00 | 59.7 PK | 74.0 | -14.3 | 2.38 H | 114 | 39.90 | 19.80 |
| 4 | 11160.00 | 47.0 AV | 54.0 | -7.0 | 2.38 H | 114 | 27.20 | 19.80 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5580.00 | 117.3 PK | | | 2.69 V | 318 | 76.30 | 41.00 |
| 2 | *5580.00 | 106.8 AV | | | 2.69 V | 318 | 65.80 | 41.00 |
| 3 | 11160.00 | 60.1 PK | 74.0 | -13.9 | 1.97 V | 211 | 40.30 | 19.80 |
| 4 | 11160.00 | 47.5 AV | 54.0 | -6.5 | 1.97 V | 211 | 27.70 | 19.80 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 140 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5700.00 | 103.5 PK | | | 2.69 H | 357 | 62.00 | 41.50 |
| 2 | *5700.00 | 92.9 AV | | | 2.69 H | 357 | 51.40 | 41.50 |
| 3 | #5725.00 | 63.8 PK | 74.0 | -10.2 | 2.69 H | 357 | 56.50 | 7.30 |
| 4 | #5725.00 | 48.4 AV | 54.0 | -5.6 | 2.69 H | 357 | 41.10 | 7.30 |
| 5 | 11400.00 | 61.5 PK | 74.0 | -12.5 | 2.18 H | 154 | 41.10 | 20.40 |
| 6 | 11400.00 | 49.0 AV | 54.0 | -5.0 | 2.18 H | 154 | 28.60 | 20.40 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5700.00 | 109.7 PK | | | 2.75 V | 345 | 68.20 | 41.50 |
| 2 | *5700.00 | 99.4 AV | | | 2.75 V | 345 | 57.90 | 41.50 |
| 3 | #5725.00 | 71.5 PK | 74.0 | -2.5 | 2.75 V | 345 | 64.20 | 7.30 |
| 4 | #5725.00 | 52.8 AV | 54.0 | -1.2 | 2.75 V | 345 | 45.50 | 7.30 |
| 5 | 11400.00 | 61.8 PK | 74.0 | -12.2 | 1.99 V | 286 | 41.40 | 20.40 |
| 6 | 11400.00 | 49.2 AV | 54.0 | -4.8 | 1.99 V | 286 | 28.80 | 20.40 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 144 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | #5470.00 | 57.5 PK | 74.0 | -16.5 | 2.28 H | 87 | 54.60 | 2.90 |
| 2 | #5470.00 | 44.1 AV | 54.0 | -9.9 | 2.28 H | 87 | 41.20 | 2.90 |
| 3 | *5720.00 | 113.2 PK | | | 2.27 H | 89 | 71.60 | 41.60 |
| 4 | *5720.00 | 101.7 AV | | | 2.27 H | 89 | 60.10 | 41.60 |
| 5 | #5850.00 | 58.0 PK | 74.0 | -16.0 | 2.10 H | 81 | 54.30 | 3.70 |
| 6 | #5850.00 | 44.5 AV | 54.0 | -9.5 | 2.10 H | 81 | 40.80 | 3.70 |
| 7 | 11440.00 | 59.2 PK | 74.0 | -14.8 | 2.00 H | 116 | 42.90 | 16.30 |
| 8 | 11440.00 | 49.8 AV | 54.0 | -4.2 | 2.00 H | 116 | 33.50 | 16.30 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | #5470.00 | 56.5 PK | 74.0 | -17.5 | 2.10 V | 84 | 53.60 | 2.90 |
| 2 | #5470.00 | 42.7 AV | 54.0 | -11.3 | 2.10 V | 84 | 39.80 | 2.90 |
| 3 | *5720.00 | 110.8 PK | | | 2.24 V | 98 | 69.20 | 41.60 |
| 4 | *5720.00 | 99.7 AV | | | 2.24 V | 98 | 58.10 | 41.60 |
| 5 | #5850.00 | 57.6 PK | 74.0 | -16.4 | 2.36 V | 114 | 53.90 | 3.70 |
| 6 | #5850.00 | 44.0 AV | 54.0 | -10.0 | 2.36 V | 114 | 40.30 | 3.70 |
| 7 | 11440.00 | 60.8 PK | 74.0 | -13.2 | 2.39 V | 38 | 44.50 | 16.30 |
| 8 | 11440.00 | 50.7 AV | 54.0 | -3.3 | 2.39 V | 38 | 34.40 | 16.30 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT40)

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 54 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5150.00 | 55.4 PK | 74.0 | -18.6 | 1.86 H | 203 | 53.30 | 2.10 |
| 2 | 5150.00 | 43.0 AV | 54.0 | -11.0 | 1.86 H | 203 | 40.90 | 2.10 |
| 3 | *5270.00 | 101.9 PK | | | 1.86 H | 203 | 62.70 | 39.20 |
| 4 | *5270.00 | 91.8 AV | | | 1.86 H | 203 | 52.60 | 39.20 |
| 5 | #10540.00 | 58.0 PK | 74.0 | -16.0 | 1.89 H | 96 | 43.70 | 14.30 |
| 6 | #10540.00 | 44.9 AV | 54.0 | -9.1 | 1.89 H | 96 | 30.60 | 14.30 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5150.00 | 56.4 PK | 74.0 | -17.6 | 2.91 V | 335 | 54.30 | 2.10 |
| 2 | 5150.00 | 44.2 AV | 54.0 | -9.8 | 2.91 V | 335 | 42.10 | 2.10 |
| 3 | *5270.00 | 109.7 PK | | | 2.91 V | 335 | 70.50 | 39.20 |
| 4 | *5270.00 | 99.6 AV | | | 2.91 V | 335 | 60.40 | 39.20 |
| 5 | #10540.00 | 59.0 PK | 74.0 | -15.0 | 3.14 V | 28 | 44.70 | 14.30 |
| 6 | #10540.00 | 46.5 AV | 54.0 | -7.5 | 3.14 V | 28 | 32.20 | 14.30 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 62 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5310.00 | 97.7 PK | | | 1.87 H | 169 | 58.50 | 39.20 |
| 2 | *5310.00 | 87.8 AV | | | 1.87 H | 169 | 48.60 | 39.20 |
| 3 | 5350.00 | 68.0 PK | 74.0 | -6.0 | 1.87 H | 169 | 65.40 | 2.60 |
| 4 | 5350.00 | 48.9 AV | 54.0 | -5.1 | 1.87 H | 169 | 46.30 | 2.60 |
| 5 | 10620.00 | 58.2 PK | 74.0 | -15.8 | 1.34 H | 26 | 43.50 | 14.70 |
| 6 | 10620.00 | 45.4 AV | 54.0 | -8.6 | 1.34 H | 26 | 30.70 | 14.70 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5310.00 | 106.5 PK | | | 2.59 V | 329 | 67.30 | 39.20 |
| 2 | *5310.00 | 95.9 AV | | | 2.59 V | 329 | 56.70 | 39.20 |
| 3 | 5350.00 | 72.2 PK | 74.0 | -1.8 | 2.59 V | 329 | 69.60 | 2.60 |
| 4 | 5350.00 | 53.3 AV | 54.0 | -0.7 | 2.59 V | 329 | 50.70 | 2.60 |
| 5 | 10620.00 | 59.4 PK | 74.0 | -14.6 | 1.83 V | 316 | 44.70 | 14.70 |
| 6 | 10620.00 | 46.8 AV | 54.0 | -7.2 | 1.83 V | 316 | 32.10 | 14.70 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 102 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5460.00 | 55.9 PK | 74.0 | -18.1 | 2.22 H | 161 | 53.20 | 2.70 |
| 2 | 5460.00 | 43.4 AV | 54.0 | -10.6 | 2.22 H | 161 | 40.70 | 2.70 |
| 3 | #5470.00 | 61.6 PK | 74.0 | -12.4 | 2.22 H | 161 | 58.90 | 2.70 |
| 4 | #5470.00 | 44.4 AV | 54.0 | -9.6 | 2.22 H | 161 | 41.70 | 2.70 |
| 5 | *5510.00 | 97.5 PK | | | 2.22 H | 161 | 58.00 | 39.50 |
| 6 | *5510.00 | 86.8 AV | | | 2.22 H | 161 | 47.30 | 39.50 |
| 7 | 11020.00 | 59.7 PK | 74.0 | -14.3 | 2.14 H | 351 | 43.80 | 15.90 |
| 8 | 11020.00 | 46.6 AV | 54.0 | -7.4 | 2.14 H | 351 | 30.70 | 15.90 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5460.00 | 59.1 PK | 74.0 | -14.9 | 3.50 V | 321 | 56.40 | 2.70 |
| 2 | 5460.00 | 45.9 AV | 54.0 | -8.1 | 3.50 V | 321 | 43.20 | 2.70 |
| 3 | #5470.00 | 73.2 PK | 74.0 | -0.8 | 3.50 V | 321 | 70.50 | 2.70 |
| 4 | #5470.00 | 49.9 AV | 54.0 | -4.1 | 3.50 V | 321 | 47.20 | 2.70 |
| 5 | *5510.00 | 105.0 PK | | | 3.50 V | 321 | 65.50 | 39.50 |
| 6 | *5510.00 | 94.8 AV | | | 3.50 V | 321 | 55.30 | 39.50 |
| 7 | 11020.00 | 60.6 PK | 74.0 | -13.4 | 1.38 V | 244 | 44.70 | 15.90 |
| 8 | 11020.00 | 47.8 AV | 54.0 | -6.2 | 1.38 V | 244 | 31.90 | 15.90 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 110 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5460.00 | 60.4 PK | 74.0 | -13.6 | 1.87 H | 165 | 57.70 | 2.70 |
| 2 | 5460.00 | 47.4 AV | 54.0 | -6.6 | 1.87 H | 165 | 44.70 | 2.70 |
| 3 | #5470.00 | 58.9 PK | 74.0 | -15.1 | 1.87 H | 165 | 56.20 | 2.70 |
| 4 | #5470.00 | 49.0 AV | 54.0 | -5.0 | 1.87 H | 165 | 46.30 | 2.70 |
| 5 | *5550.00 | 101.4 PK | | | 1.87 H | 165 | 61.80 | 39.60 |
| 6 | *5550.00 | 91.3 AV | | | 1.87 H | 165 | 51.70 | 39.60 |
| 7 | 11100.00 | 58.9 PK | 74.0 | -15.1 | 2.29 H | 219 | 43.60 | 15.30 |
| 8 | 11100.00 | 46.7 AV | 54.0 | -7.3 | 2.29 H | 219 | 31.40 | 15.30 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5460.00 | 64.7 PK | 74.0 | -9.3 | 3.33 V | 325 | 62.00 | 2.70 |
| 2 | 5460.00 | 50.5 AV | 54.0 | -3.5 | 3.33 V | 325 | 47.80 | 2.70 |
| 3 | #5470.00 | 66.5 PK | 74.0 | -7.5 | 3.33 V | 325 | 63.80 | 2.70 |
| 4 | #5470.00 | 53.1 AV | 54.0 | -0.9 | 3.33 V | 325 | 50.40 | 2.70 |
| 5 | *5550.00 | 110.8 PK | | | 3.33 V | 325 | 71.20 | 39.60 |
| 6 | *5550.00 | 100.0 AV | | | 3.33 V | 325 | 60.40 | 39.60 |
| 7 | 11100.00 | 60.2 PK | 74.0 | -13.8 | 3.13 V | 183 | 44.90 | 15.30 |
| 8 | 11100.00 | 47.4 AV | 54.0 | -6.6 | 3.13 V | 183 | 32.10 | 15.30 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 134 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5670.00 | 98.6 PK | | | 1.88 H | 246 | 58.80 | 39.80 |
| 2 | *5670.00 | 88.7 AV | | | 1.88 H | 246 | 48.90 | 39.80 |
| 3 | #5725.00 | 58.6 PK | 74.0 | -15.4 | 1.88 H | 246 | 55.50 | 3.10 |
| 4 | #5725.00 | 49.9 AV | 54.0 | -4.1 | 1.88 H | 246 | 46.80 | 3.10 |
| 5 | 11340.00 | 59.3 PK | 74.0 | -14.7 | 1.09 H | 11 | 43.50 | 15.80 |
| 6 | 11340.00 | 46.6 AV | 54.0 | -7.4 | 1.09 H | 11 | 30.80 | 15.80 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5670.00 | 107.5 PK | | | 3.07 V | 319 | 67.70 | 39.80 |
| 2 | *5670.00 | 97.3 AV | | | 3.07 V | 319 | 57.50 | 39.80 |
| 3 | #5725.00 | 68.8 PK | 74.0 | -5.2 | 3.07 V | 319 | 65.70 | 3.10 |
| 4 | #5725.00 | 53.3 AV | 54.0 | -0.7 | 3.07 V | 319 | 50.20 | 3.10 |
| 5 | 11340.00 | 60.7 PK | 74.0 | -13.3 | 1.89 V | 174 | 44.90 | 15.80 |
| 6 | 11340.00 | 47.9 AV | 54.0 | -6.1 | 1.89 V | 174 | 32.10 | 15.80 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 142 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5710.00 | 108.5 PK | | | 2.70 H | 99 | 66.90 | 41.60 |
| 2 | *5710.00 | 97.8 AV | | | 2.70 H | 99 | 56.20 | 41.60 |
| 3 | #5850.00 | 61.6 PK | 74.0 | -12.4 | 2.53 H | 108 | 57.90 | 3.70 |
| 4 | #5850.00 | 46.9 AV | 54.0 | -7.1 | 2.53 H | 108 | 43.20 | 3.70 |
| 5 | 11420.00 | 59.8 PK | 74.0 | -14.2 | 2.49 H | 147 | 43.50 | 16.30 |
| 6 | 11420.00 | 48.3 AV | 54.0 | -5.7 | 2.49 H | 147 | 32.00 | 16.30 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5710.00 | 107.5 PK | | | 2.31 V | 98 | 65.90 | 41.60 |
| 2 | *5710.00 | 96.4 AV | | | 2.31 V | 98 | 54.80 | 41.60 |
| 3 | #5850.00 | 62.5 PK | 74.0 | -11.5 | 2.28 V | 104 | 58.80 | 3.70 |
| 4 | #5850.00 | 46.0 AV | 54.0 | -8.0 | 2.28 V | 104 | 42.30 | 3.70 |
| 5 | 11420.00 | 60.2 PK | 74.0 | -13.8 | 2.14 V | 38 | 43.90 | 16.30 |
| 6 | 11420.00 | 49.5 AV | 54.0 | -4.5 | 2.14 V | 38 | 33.20 | 16.30 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT80)

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 58 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5150.00 | 53.4 PK | 74.0 | -20.6 | 2.16 H | 208 | 51.30 | 2.10 |
| 2 | 5150.00 | 43.1 AV | 54.0 | -10.9 | 2.16 H | 208 | 41.00 | 2.10 |
| 3 | *5290.00 | 92.9 PK | | | 2.16 H | 208 | 53.70 | 39.20 |
| 4 | *5290.00 | 82.4 AV | | | 2.16 H | 208 | 43.20 | 39.20 |
| 5 | 5350.00 | 60.5 PK | 74.0 | -13.5 | 2.16 H | 208 | 57.90 | 2.60 |
| 6 | 5350.00 | 50.1 AV | 54.0 | -3.9 | 2.16 H | 208 | 47.50 | 2.60 |
| 7 | #10580.00 | 58.2 PK | 74.0 | -15.8 | 1.62 H | 75 | 43.60 | 14.60 |
| 8 | #10580.00 | 45.3 AV | 54.0 | -8.7 | 1.62 H | 75 | 30.70 | 14.60 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5150.00 | 55.3 PK | 74.0 | -18.7 | 2.68 V | 327 | 53.20 | 2.10 |
| 2 | 5150.00 | 44.6 AV | 54.0 | -9.4 | 2.68 V | 327 | 42.50 | 2.10 |
| 3 | *5290.00 | 101.2 PK | | | 2.68 V | 327 | 62.00 | 39.20 |
| 4 | *5290.00 | 90.4 AV | | | 2.68 V | 327 | 51.20 | 39.20 |
| 5 | 5350.00 | 68.4 PK | 74.0 | -5.6 | 2.68 V | 327 | 65.80 | 2.60 |
| 6 | 5350.00 | 53.3 AV | 54.0 | -0.7 | 2.68 V | 327 | 50.70 | 2.60 |
| 7 | #10580.00 | 58.9 PK | 74.0 | -15.1 | 3.31 V | 47 | 44.30 | 14.60 |
| 8 | #10580.00 | 46.8 AV | 54.0 | -7.2 | 3.31 V | 47 | 32.20 | 14.60 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 106 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5460.00 | 64.4 PK | 74.0 | -9.6 | 1.80 H | 224 | 61.70 | 2.70 |
| 2 | 5460.00 | 48.0 AV | 54.0 | -6.0 | 1.80 H | 224 | 45.30 | 2.70 |
| 3 | #5470.00 | 65.1 PK | 74.0 | -8.9 | 1.80 H | 224 | 62.40 | 2.70 |
| 4 | #5470.00 | 50.0 AV | 54.0 | -4.0 | 1.80 H | 224 | 47.30 | 2.70 |
| 5 | *5530.00 | 92.9 PK | | | 1.80 H | 224 | 53.40 | 39.50 |
| 6 | *5530.00 | 82.7 AV | | | 1.80 H | 224 | 43.20 | 39.50 |
| 7 | #5725.00 | 55.8 PK | 74.0 | -18.2 | 1.80 H | 224 | 52.70 | 3.10 |
| 8 | #5725.00 | 43.5 AV | 54.0 | -10.5 | 1.80 H | 224 | 40.40 | 3.10 |
| 9 | 11060.00 | 59.3 PK | 74.0 | -14.7 | 1.26 H | 33 | 43.60 | 15.70 |
| 10 | 11060.00 | 46.3 AV | 54.0 | -7.7 | 1.26 H | 33 | 30.60 | 15.70 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5460.00 | 65.9 PK | 74.0 | -8.1 | 2.83 V | 320 | 63.20 | 2.70 |
| 2 | 5460.00 | 50.8 AV | 54.0 | -3.2 | 2.83 V | 320 | 48.10 | 2.70 |
| 3 | #5470.00 | 69.4 PK | 74.0 | -4.6 | 2.83 V | 320 | 66.70 | 2.70 |
| 4 | #5470.00 | 53.1 AV | 54.0 | -0.9 | 2.83 V | 320 | 50.40 | 2.70 |
| 5 | *5530.00 | 102.5 PK | | | 2.83 V | 320 | 63.00 | 39.50 |
| 6 | *5530.00 | 92.0 AV | | | 2.83 V | 320 | 52.50 | 39.50 |
| 7 | #5725.00 | 57.7 PK | 74.0 | -16.3 | 2.83 V | 320 | 54.60 | 3.10 |
| 8 | #5725.00 | 45.8 AV | 54.0 | -8.2 | 2.83 V | 320 | 42.70 | 3.10 |
| 9 | 11060.00 | 60.4 PK | 74.0 | -13.6 | 1.93 V | 222 | 44.70 | 15.70 |
| 10 | 11060.00 | 48.2 AV | 54.0 | -5.8 | 1.93 V | 222 | 32.50 | 15.70 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 122 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5460.00 | 60.3 PK | 74.0 | -13.7 | 1.73 H | 215 | 57.60 | 2.70 |
| 2 | 5460.00 | 45.5 AV | 54.0 | -8.5 | 1.73 H | 215 | 42.80 | 2.70 |
| 3 | #5470.00 | 61.6 PK | 74.0 | -12.4 | 1.73 H | 215 | 58.90 | 2.70 |
| 4 | #5470.00 | 46.2 AV | 54.0 | -7.8 | 1.73 H | 215 | 43.50 | 2.70 |
| 5 | *5610.00 | 98.9 PK | | | 1.73 H | 215 | 59.20 | 39.70 |
| 6 | *5610.00 | 86.5 AV | | | 1.73 H | 215 | 46.80 | 39.70 |
| 7 | #5725.00 | 65.4 PK | 74.0 | -8.6 | 1.73 H | 215 | 62.30 | 3.10 |
| 8 | #5725.00 | 49.3 AV | 54.0 | -4.7 | 1.73 H | 215 | 46.20 | 3.10 |
| 9 | 11220.00 | 60.3 PK | 74.0 | -13.7 | 1.34 H | 26 | 44.80 | 15.50 |
| 10 | 11220.00 | 47.5 AV | 54.0 | -6.5 | 1.34 H | 26 | 32.00 | 15.50 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|----------|-----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5460.00 | 65.9 PK | 74.0 | -8.1 | 2.73 V | 319 | 63.20 | 2.70 |
| 2 | 5460.00 | 49.8 AV | 54.0 | -4.2 | 2.73 V | 319 | 47.10 | 2.70 |
| 3 | #5470.00 | 68.0 PK | 74.0 | -6.0 | 2.73 V | 319 | 65.30 | 2.70 |
| 4 | #5470.00 | 50.9 AV | 54.0 | -3.1 | 2.73 V | 319 | 48.20 | 2.70 |
| 5 | *5610.00 | 108.0 PK | | | 2.73 V | 319 | 68.30 | 39.70 |
| 6 | *5610.00 | 96.4 AV | | | 2.73 V | 319 | 56.70 | 39.70 |
| 7 | #5725.00 | 71.0 PK | 74.0 | -3.0 | 2.73 V | 319 | 67.90 | 3.10 |
| 8 | #5725.00 | 53.5 AV | 54.0 | -0.5 | 2.73 V | 319 | 50.40 | 3.10 |
| 9 | 11220.00 | 61.8 PK | 74.0 | -12.2 | 1.84 V | 213 | 46.30 | 15.50 |
| 10 | 11220.00 | 48.8 AV | 54.0 | -5.2 | 1.84 V | 213 | 33.30 | 15.50 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 138 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | #5470.00 | 57.8 PK | 74.0 | -16.2 | 2.56 H | 105 | 54.90 | 2.90 |
| 2 | #5470.00 | 44.4 AV | 54.0 | -9.6 | 2.56 H | 105 | 41.50 | 2.90 |
| 3 | *5690.00 | 104.4 PK | | | 2.72 H | 98 | 62.80 | 41.60 |
| 4 | *5690.00 | 92.9 AV | | | 2.72 H | 98 | 51.30 | 41.60 |
| 5 | #5850.00 | 65.4 PK | 74.0 | -8.6 | 2.66 H | 102 | 61.70 | 3.70 |
| 6 | #5850.00 | 50.0 AV | 54.0 | -4.0 | 2.66 H | 102 | 46.30 | 3.70 |
| 7 | 11380.00 | 60.3 PK | 74.0 | -13.7 | 2.18 H | 100 | 44.10 | 16.20 |
| 8 | 11380.00 | 49.7 AV | 54.0 | -4.3 | 2.18 H | 100 | 33.50 | 16.20 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | #5470.00 | 58.0 PK | 74.0 | -16.0 | 2.89 V | 104 | 55.10 | 2.90 |
| 2 | #5470.00 | 43.6 AV | 54.0 | -10.4 | 2.89 V | 104 | 40.70 | 2.90 |
| 3 | *5690.00 | 103.4 PK | | | 2.71 V | 83 | 61.80 | 41.60 |
| 4 | *5690.00 | 92.9 AV | | | 2.71 V | 83 | 51.30 | 41.60 |
| 5 | #5850.00 | 66.4 PK | 74.0 | -7.6 | 3.21 V | 78 | 62.70 | 3.70 |
| 6 | #5850.00 | 51.7 AV | 54.0 | -2.3 | 3.21 V | 78 | 48.00 | 3.70 |
| 7 | 11380.00 | 61.9 PK | 74.0 | -12.1 | 2.20 V | 23 | 45.70 | 16.20 |
| 8 | 11380.00 | 51.6 AV | 54.0 | -2.4 | 2.20 V | 23 | 35.40 | 16.20 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

2TX

802.11a

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 52 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5100.00 | 56.3 PK | 74.0 | -17.7 | 2.87 H | 351 | 54.30 | 2.00 |
| 2 | 5100.00 | 46.7 AV | 54.0 | -7.3 | 2.87 H | 351 | 44.70 | 2.00 |
| 3 | *5260.00 | 109.5 PK | | | 3.12 H | 344 | 70.40 | 39.10 |
| 4 | *5260.00 | 106.3 AV | | | 3.12 H | 344 | 67.20 | 39.10 |
| 5 | #10540.00 | 58.0 PK | 74.0 | -16.0 | 2.13 H | 218 | 43.70 | 14.30 |
| 6 | #10540.00 | 45.4 AV | 54.0 | -8.6 | 2.13 H | 218 | 31.10 | 14.30 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5100.00 | 59.3 PK | 74.0 | -14.7 | 2.75 V | 147 | 57.30 | 2.00 |
| 2 | 5100.00 | 48.1 AV | 54.0 | -5.9 | 2.75 V | 147 | 46.10 | 2.00 |
| 3 | *5260.00 | 116.4 PK | | | 3.72 V | 163 | 77.30 | 39.10 |
| 4 | *5260.00 | 106.0 AV | | | 3.72 V | 163 | 66.90 | 39.10 |
| 5 | #10540.00 | 59.5 PK | 74.0 | -14.5 | 2.26 V | 18 | 45.20 | 14.30 |
| 6 | #10540.00 | 46.9 AV | 54.0 | -7.1 | 2.26 V | 18 | 32.60 | 14.30 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 60 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5300.00 | 107.6 PK | | | 2.78 H | 329 | 68.40 | 39.20 |
| 2 | *5300.00 | 97.6 AV | | | 2.78 H | 329 | 58.40 | 39.20 |
| 3 | 5380.00 | 59.0 PK | 74.0 | -15.0 | 3.53 H | 226 | 56.40 | 2.60 |
| 4 | 5380.00 | 48.9 AV | 54.0 | -5.1 | 3.53 H | 226 | 46.30 | 2.60 |
| 5 | 10600.00 | 58.1 PK | 74.0 | -15.9 | 1.85 H | 132 | 43.40 | 14.70 |
| 6 | 10600.00 | 45.2 AV | 54.0 | -8.8 | 1.85 H | 132 | 30.50 | 14.70 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5300.00 | 113.4 PK | | | 3.58 V | 136 | 74.20 | 39.20 |
| 2 | *5300.00 | 103.9 AV | | | 3.58 V | 136 | 64.70 | 39.20 |
| 3 | 5380.00 | 62.2 PK | 74.0 | -11.8 | 3.46 V | 319 | 59.60 | 2.60 |
| 4 | 5380.00 | 53.2 AV | 54.0 | -0.8 | 3.46 V | 319 | 50.60 | 2.60 |
| 5 | 10600.00 | 59.4 PK | 74.0 | -14.6 | 1.72 V | 204 | 44.70 | 14.70 |
| 6 | 10600.00 | 46.5 AV | 54.0 | -7.5 | 1.72 V | 204 | 31.80 | 14.70 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 64 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5320.00 | 105.4 PK | | | 1.79 H | 321 | 66.20 | 39.20 |
| 2 | *5320.00 | 95.9 AV | | | 1.79 H | 321 | 56.70 | 39.20 |
| 3 | 5400.00 | 59.3 PK | 74.0 | -14.7 | 1.89 H | 234 | 56.60 | 2.70 |
| 4 | 5400.00 | 49.3 AV | 54.0 | -4.7 | 1.89 H | 234 | 46.60 | 2.70 |
| 5 | 10640.00 | 58.1 PK | 74.0 | -15.9 | 1.56 H | 223 | 43.40 | 14.70 |
| 6 | 10640.00 | 45.7 AV | 54.0 | -8.3 | 1.56 H | 223 | 31.00 | 14.70 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5320.00 | 113.5 PK | | | 3.51 V | 141 | 74.30 | 39.20 |
| 2 | *5320.00 | 103.8 AV | | | 3.51 V | 141 | 64.60 | 39.20 |
| 3 | 5400.00 | 63.2 PK | 74.0 | -10.8 | 3.45 V | 326 | 60.50 | 2.70 |
| 4 | 5400.00 | 53.2 AV | 54.0 | -0.8 | 3.45 V | 326 | 50.50 | 2.70 |
| 5 | 10640.00 | 59.5 PK | 74.0 | -14.5 | 1.79 V | 346 | 44.80 | 14.70 |
| 6 | 10640.00 | 47.3 AV | 54.0 | -6.7 | 1.79 V | 346 | 32.60 | 14.70 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 100 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5420.00 | 60.3 PK | 74.0 | -13.7 | 2.46 H | 351 | 57.60 | 2.70 |
| 2 | 5420.00 | 50.3 AV | 54.0 | -3.7 | 2.46 H | 351 | 47.60 | 2.70 |
| 3 | #5470.00 | 67.2 PK | 74.0 | -6.8 | 2.58 H | 291 | 64.50 | 2.70 |
| 4 | #5470.00 | 48.8 AV | 54.0 | -5.2 | 2.58 H | 291 | 46.10 | 2.70 |
| 5 | *5500.00 | 111.3 PK | | | 2.83 H | 2 | 71.80 | 39.50 |
| 6 | *5500.00 | 100.9 AV | | | 2.83 H | 2 | 61.40 | 39.50 |
| 7 | 11000.00 | 60.9 PK | 74.0 | -13.1 | 2.34 H | 47 | 44.80 | 16.10 |
| 8 | 11000.00 | 47.7 AV | 54.0 | -6.3 | 2.34 H | 47 | 31.60 | 16.10 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5420.00 | 64.5 PK | 74.0 | -9.5 | 3.56 V | 330 | 61.80 | 2.70 |
| 2 | 5420.00 | 53.2 AV | 54.0 | -0.8 | 3.56 V | 330 | 50.50 | 2.70 |
| 3 | #5470.00 | 71.0 PK | 74.0 | -3.0 | 3.24 V | 139 | 68.30 | 2.70 |
| 4 | #5470.00 | 52.0 AV | 54.0 | -2.0 | 3.24 V | 139 | 49.30 | 2.70 |
| 5 | *5500.00 | 116.6 PK | | | 2.90 V | 139 | 77.10 | 39.50 |
| 6 | *5500.00 | 106.9 AV | | | 2.90 V | 139 | 67.40 | 39.50 |
| 7 | 11000.00 | 61.4 PK | 74.0 | -12.6 | 1.73 V | 82 | 45.30 | 16.10 |
| 8 | 11000.00 | 48.1 AV | 54.0 | -5.9 | 1.73 V | 82 | 32.00 | 16.10 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 116 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5420.00 | 59.5 PK | 74.0 | -14.5 | 2.51 H | 348 | 56.80 | 2.70 |
| 2 | 5420.00 | 46.9 AV | 54.0 | -7.1 | 2.51 H | 348 | 44.20 | 2.70 |
| 3 | #5470.00 | 57.6 PK | 74.0 | -16.4 | 2.76 H | 345 | 54.90 | 2.70 |
| 4 | #5470.00 | 44.5 AV | 54.0 | -9.5 | 2.76 H | 345 | 41.80 | 2.70 |
| 5 | *5580.00 | 111.5 PK | | | 2.69 H | 353 | 71.80 | 39.70 |
| 6 | *5580.00 | 101.3 AV | | | 2.69 H | 353 | 61.60 | 39.70 |
| 7 | #5735.00 | 60.6 PK | 74.0 | -13.4 | 2.55 H | 347 | 57.50 | 3.10 |
| 8 | #5735.00 | 48.1 AV | 54.0 | -5.9 | 2.55 H | 347 | 45.00 | 3.10 |
| 9 | 11160.00 | 60.1 PK | 74.0 | -13.9 | 2.46 H | 51 | 44.80 | 15.30 |
| 10 | 11160.00 | 46.7 AV | 54.0 | -7.3 | 2.46 H | 51 | 31.40 | 15.30 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5420.00 | 63.0 PK | 74.0 | -11.0 | 3.56 V | 324 | 60.30 | 2.70 |
| 2 | 5420.00 | 51.7 AV | 54.0 | -2.3 | 3.56 V | 324 | 49.00 | 2.70 |
| 3 | #5470.00 | 59.5 PK | 74.0 | -14.5 | 2.84 V | 165 | 56.80 | 2.70 |
| 4 | #5470.00 | 46.9 AV | 54.0 | -7.1 | 2.84 V | 165 | 44.20 | 2.70 |
| 5 | *5580.00 | 117.7 PK | | | 3.02 V | 154 | 78.00 | 39.70 |
| 6 | *5580.00 | 107.3 AV | | | 3.02 V | 154 | 67.60 | 39.70 |
| 7 | #5735.00 | 63.8 PK | 74.0 | -10.2 | 3.14 V | 143 | 60.70 | 3.10 |
| 8 | #5735.00 | 52.9 AV | 54.0 | -1.1 | 3.14 V | 143 | 49.80 | 3.10 |
| 9 | 11160.00 | 60.7 PK | 74.0 | -13.3 | 1.64 V | 72 | 45.40 | 15.30 |
| 10 | 11160.00 | 47.6 AV | 54.0 | -6.4 | 1.64 V | 72 | 32.30 | 15.30 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 140 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5700.00 | 107.4 PK | | | 2.38 H | 345 | 67.50 | 39.90 |
| 2 | *5700.00 | 96.5 AV | | | 2.38 H | 345 | 56.60 | 39.90 |
| 3 | #5725.00 | 69.6 PK | 74.0 | -4.4 | 2.43 H | 358 | 66.50 | 3.10 |
| 4 | #5725.00 | 50.3 AV | 54.0 | -3.7 | 2.43 H | 358 | 47.20 | 3.10 |
| 5 | 11400.00 | 60.4 PK | 74.0 | -13.6 | 2.21 H | 58 | 45.10 | 15.30 |
| 6 | 11400.00 | 47.0 AV | 54.0 | -7.0 | 2.21 H | 58 | 31.70 | 15.30 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5700.00 | 113.1 PK | | | 2.92 V | 143 | 73.20 | 39.90 |
| 2 | *5700.00 | 103.3 AV | | | 2.92 V | 143 | 63.40 | 39.90 |
| 3 | #5725.00 | 73.1 PK | 74.0 | -0.9 | 3.68 V | 315 | 70.00 | 3.10 |
| 4 | #5725.00 | 53.2 AV | 54.0 | -0.8 | 3.68 V | 315 | 50.10 | 3.10 |
| 5 | 11400.00 | 60.7 PK | 74.0 | -13.3 | 1.65 V | 74 | 45.40 | 15.30 |
| 6 | 11400.00 | 47.4 AV | 54.0 | -6.6 | 1.65 V | 74 | 32.10 | 15.30 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 144 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | #5470.00 | 56.3 PK | 74.0 | -17.7 | 2.15 H | 81 | 53.40 | 2.90 |
| 2 | #5470.00 | 43.7 AV | 54.0 | -10.3 | 2.15 H | 81 | 40.80 | 2.90 |
| 3 | *5720.00 | 114.0 PK | | | 2.38 H | 88 | 72.40 | 41.60 |
| 4 | *5720.00 | 103.9 AV | | | 2.38 H | 88 | 62.30 | 41.60 |
| 5 | #5850.00 | 57.8 PK | 74.0 | -16.2 | 2.36 H | 94 | 54.10 | 3.70 |
| 6 | #5850.00 | 44.8 AV | 54.0 | -9.2 | 2.36 H | 94 | 41.10 | 3.70 |
| 7 | 11440.00 | 60.3 PK | 74.0 | -13.7 | 2.13 H | 102 | 44.00 | 16.30 |
| 8 | 11440.00 | 50.4 AV | 54.0 | -3.6 | 2.13 H | 102 | 34.10 | 16.30 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | #5470.00 | 57.5 PK | 74.0 | -16.5 | 2.14 V | 119 | 54.60 | 2.90 |
| 2 | #5470.00 | 45.7 AV | 54.0 | -8.3 | 2.14 V | 119 | 42.80 | 2.90 |
| 3 | *5720.00 | 113.2 PK | | | 2.26 V | 100 | 71.60 | 41.60 |
| 4 | *5720.00 | 103.0 AV | | | 2.26 V | 100 | 61.40 | 41.60 |
| 5 | #5850.00 | 58.2 PK | 74.0 | -15.8 | 2.38 V | 120 | 54.50 | 3.70 |
| 6 | #5850.00 | 45.8 AV | 54.0 | -8.2 | 2.38 V | 120 | 42.10 | 3.70 |
| 7 | 11440.00 | 62.5 PK | 74.0 | -11.5 | 2.23 V | 18 | 46.20 | 16.30 |
| 8 | 11440.00 | 52.6 AV | 54.0 | -1.4 | 2.23 V | 18 | 36.30 | 16.30 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT20)

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 52 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5100.00 | 55.3 PK | 74.0 | -18.7 | 1.65 H | 15 | 53.30 | 2.00 |
| 2 | 5100.00 | 42.9 AV | 54.0 | -11.1 | 1.65 H | 15 | 40.90 | 2.00 |
| 3 | *5260.00 | 108.9 PK | | | 1.49 H | 9 | 69.80 | 39.10 |
| 4 | *5260.00 | 98.2 AV | | | 1.49 H | 9 | 59.10 | 39.10 |
| 5 | #10520.00 | 57.4 PK | 74.0 | -16.6 | 1.47 H | 158 | 43.20 | 14.20 |
| 6 | #10520.00 | 44.8 AV | 54.0 | -9.2 | 1.47 H | 158 | 30.60 | 14.20 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5100.00 | 58.8 PK | 74.0 | -15.2 | 2.28 V | 185 | 56.80 | 2.00 |
| 2 | 5100.00 | 46.9 AV | 54.0 | -7.1 | 2.28 V | 185 | 44.90 | 2.00 |
| 3 | *5260.00 | 115.0 PK | | | 2.32 V | 184 | 75.90 | 39.10 |
| 4 | *5260.00 | 104.8 AV | | | 2.32 V | 184 | 65.70 | 39.10 |
| 5 | #10520.00 | 58.9 PK | 74.0 | -15.1 | 3.34 V | 125 | 44.70 | 14.20 |
| 6 | #10520.00 | 46.6 AV | 54.0 | -7.4 | 3.34 V | 125 | 32.40 | 14.20 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 60 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5300.00 | 108.7 PK | | | 1.67 H | 7 | 69.50 | 39.20 |
| 2 | *5300.00 | 98.9 AV | | | 1.67 H | 7 | 59.70 | 39.20 |
| 3 | 5380.00 | 56.2 PK | 74.0 | -17.8 | 1.75 H | 349 | 53.60 | 2.60 |
| 4 | 5380.00 | 48.9 AV | 54.0 | -5.1 | 1.75 H | 349 | 46.30 | 2.60 |
| 5 | #10300.00 | 58.1 PK | 74.0 | -15.9 | 2.85 H | 189 | 43.70 | 14.40 |
| 6 | #10300.00 | 45.0 AV | 54.0 | -9.0 | 2.85 H | 189 | 30.60 | 14.40 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5300.00 | 115.7 PK | | | 2.67 V | 182 | 76.50 | 39.20 |
| 2 | *5300.00 | 105.0 AV | | | 2.67 V | 182 | 65.80 | 39.20 |
| 3 | 5380.00 | 63.6 PK | 74.0 | -10.4 | 2.85 V | 2 | 61.00 | 2.60 |
| 4 | 5380.00 | 52.8 AV | 54.0 | -1.2 | 2.85 V | 2 | 50.20 | 2.60 |
| 5 | #10300.00 | 59.2 PK | 74.0 | -14.8 | 1.78 V | 165 | 44.80 | 14.40 |
| 6 | #10300.00 | 46.6 AV | 54.0 | -7.4 | 1.78 V | 165 | 32.20 | 14.40 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 64 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5320.00 | 106.9 PK | | | 1.64 H | 18 | 67.70 | 39.20 |
| 2 | *5320.00 | 96.8 AV | | | 1.64 H | 18 | 57.60 | 39.20 |
| 3 | 5400.00 | 63.2 PK | 74.0 | -10.8 | 1.50 H | 3 | 60.50 | 2.70 |
| 4 | 5400.00 | 50.0 AV | 54.0 | -4.0 | 1.50 H | 3 | 47.30 | 2.70 |
| 5 | 10640.00 | 58.4 PK | 74.0 | -15.6 | 1.67 H | 322 | 43.70 | 14.70 |
| 6 | 10640.00 | 45.2 AV | 54.0 | -8.8 | 1.67 H | 322 | 30.50 | 14.70 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5320.00 | 114.3 PK | | | 3.04 V | 129 | 75.10 | 39.20 |
| 2 | *5320.00 | 103.3 AV | | | 3.04 V | 129 | 64.10 | 39.20 |
| 3 | 5400.00 | 68.3 PK | 74.0 | -5.7 | 3.01 V | 181 | 65.60 | 2.70 |
| 4 | 5400.00 | 53.2 AV | 54.0 | -0.8 | 3.01 V | 181 | 50.50 | 2.70 |
| 5 | 10640.00 | 59.4 PK | 74.0 | -14.6 | 1.77 V | 325 | 44.70 | 14.70 |
| 6 | 10640.00 | 46.5 AV | 54.0 | -7.5 | 1.77 V | 325 | 31.80 | 14.70 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 100 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5420.00 | 60.8 PK | 74.0 | -13.2 | 2.51 H | 352 | 58.10 | 2.70 |
| 2 | 5420.00 | 50.3 AV | 54.0 | -3.7 | 2.51 H | 352 | 47.60 | 2.70 |
| 3 | #5470.00 | 67.9 PK | 74.0 | -6.1 | 2.36 H | 284 | 65.20 | 2.70 |
| 4 | #5470.00 | 50.5 AV | 54.0 | -3.5 | 2.36 H | 284 | 47.80 | 2.70 |
| 5 | *5500.00 | 109.2 PK | | | 2.74 H | 342 | 69.70 | 39.50 |
| 6 | *5500.00 | 99.0 AV | | | 2.74 H | 342 | 59.50 | 39.50 |
| 7 | 11000.00 | 60.8 PK | 74.0 | -13.2 | 2.23 H | 55 | 44.70 | 16.10 |
| 8 | 11000.00 | 47.9 AV | 54.0 | -6.1 | 2.23 H | 55 | 31.80 | 16.10 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5420.00 | 64.3 PK | 74.0 | -9.7 | 3.52 V | 136 | 61.60 | 2.70 |
| 2 | 5420.00 | 53.0 AV | 54.0 | -1.0 | 3.52 V | 136 | 50.30 | 2.70 |
| 3 | #5470.00 | 73.4 PK | 74.0 | -0.6 | 3.88 V | 312 | 70.70 | 2.70 |
| 4 | #5470.00 | 53.0 AV | 54.0 | -1.0 | 3.88 V | 312 | 50.30 | 2.70 |
| 5 | *5500.00 | 114.5 PK | | | 3.14 V | 139 | 75.00 | 39.50 |
| 6 | *5500.00 | 103.4 AV | | | 3.14 V | 139 | 63.90 | 39.50 |
| 7 | 11000.00 | 61.4 PK | 74.0 | -12.6 | 1.63 V | 78 | 45.30 | 16.10 |
| 8 | 11000.00 | 48.2 AV | 54.0 | -5.8 | 1.63 V | 78 | 32.10 | 16.10 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 116 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5420.00 | 59.9 PK | 74.0 | -14.1 | 2.49 H | 355 | 57.20 | 2.70 |
| 2 | 5420.00 | 47.2 AV | 54.0 | -6.8 | 2.49 H | 355 | 44.50 | 2.70 |
| 3 | #5470.00 | 58.0 PK | 74.0 | -16.0 | 2.53 H | 358 | 55.30 | 2.70 |
| 4 | #5470.00 | 44.9 AV | 54.0 | -9.1 | 2.53 H | 358 | 42.20 | 2.70 |
| 5 | *5580.00 | 110.2 PK | | | 2.72 H | 341 | 70.50 | 39.70 |
| 6 | *5580.00 | 100.9 AV | | | 2.72 H | 341 | 61.20 | 39.70 |
| 7 | #5735.00 | 60.5 PK | 74.0 | -13.5 | 2.48 H | 335 | 57.40 | 3.10 |
| 8 | #5735.00 | 48.1 AV | 54.0 | -5.9 | 2.48 H | 335 | 45.00 | 3.10 |
| 9 | 11160.00 | 59.9 PK | 74.0 | -14.1 | 2.35 H | 38 | 44.60 | 15.30 |
| 10 | 11160.00 | 47.0 AV | 54.0 | -7.0 | 2.35 H | 38 | 31.70 | 15.30 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5420.00 | 63.1 PK | 74.0 | -10.9 | 3.55 V | 136 | 60.40 | 2.70 |
| 2 | 5420.00 | 51.7 AV | 54.0 | -2.3 | 3.55 V | 136 | 49.00 | 2.70 |
| 3 | #5470.00 | 60.5 PK | 74.0 | -13.5 | 3.41 V | 294 | 57.80 | 2.70 |
| 4 | #5470.00 | 47.6 AV | 54.0 | -6.4 | 3.41 V | 294 | 44.90 | 2.70 |
| 5 | *5580.00 | 116.9 PK | | | 3.55 V | 311 | 77.20 | 39.70 |
| 6 | *5580.00 | 106.8 AV | | | 3.55 V | 311 | 67.10 | 39.70 |
| 7 | #5735.00 | 63.7 PK | 74.0 | -10.3 | 3.26 V | 325 | 60.60 | 3.10 |
| 8 | #5735.00 | 52.4 AV | 54.0 | -1.6 | 3.26 V | 325 | 49.30 | 3.10 |
| 9 | 11160.00 | 61.1 PK | 74.0 | -12.9 | 3.55 V | 311 | 45.80 | 15.30 |
| 10 | 11160.00 | 47.7 AV | 54.0 | -6.3 | 3.55 V | 311 | 32.40 | 15.30 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 140 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5700.00 | 106.2 PK | | | 2.24 H | 335 | 66.30 | 39.90 |
| 2 | *5700.00 | 96.3 AV | | | 2.24 H | 335 | 56.40 | 39.90 |
| 3 | #5725.00 | 67.6 PK | 74.0 | -6.4 | 2.50 H | 346 | 64.50 | 3.10 |
| 4 | #5725.00 | 50.4 AV | 54.0 | -3.6 | 2.50 H | 346 | 47.30 | 3.10 |
| 5 | 11400.00 | 60.1 PK | 74.0 | -13.9 | 2.13 H | 64 | 44.80 | 15.30 |
| 6 | 11400.00 | 47.0 AV | 54.0 | -7.0 | 2.13 H | 64 | 31.70 | 15.30 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5700.00 | 111.9 PK | | | 3.24 V | 328 | 72.00 | 39.90 |
| 2 | *5700.00 | 101.9 AV | | | 3.24 V | 328 | 62.00 | 39.90 |
| 3 | #5725.00 | 72.3 PK | 74.0 | -1.7 | 3.26 V | 149 | 69.20 | 3.10 |
| 4 | #5725.00 | 53.0 AV | 54.0 | -1.0 | 3.26 V | 149 | 49.90 | 3.10 |
| 5 | 11400.00 | 60.6 PK | 74.0 | -13.4 | 1.72 V | 85 | 45.30 | 15.30 |
| 6 | 11400.00 | 47.3 AV | 54.0 | -6.7 | 1.72 V | 85 | 32.00 | 15.30 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 144 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | #5470.00 | 56.0 PK | 74.0 | -18.0 | 2.48 H | 102 | 53.10 | 2.90 |
| 2 | #5470.00 | 43.7 AV | 54.0 | -10.3 | 2.48 H | 102 | 40.80 | 2.90 |
| 3 | *5720.00 | 113.3 PK | | | 2.33 H | 90 | 71.70 | 41.60 |
| 4 | *5720.00 | 103.1 AV | | | 2.33 H | 90 | 61.50 | 41.60 |
| 5 | #5850.00 | 57.5 PK | 74.0 | -16.5 | 2.34 H | 117 | 53.80 | 3.70 |
| 6 | #5850.00 | 44.2 AV | 54.0 | -9.8 | 2.34 H | 117 | 40.50 | 3.70 |
| 7 | 11440.00 | 60.1 PK | 74.0 | -13.9 | 2.19 H | 114 | 43.80 | 16.30 |
| 8 | 11440.00 | 49.5 AV | 54.0 | -4.5 | 2.19 H | 114 | 33.20 | 16.30 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | #5470.00 | 56.4 PK | 74.0 | -17.6 | 2.15 V | 106 | 53.50 | 2.90 |
| 2 | #5470.00 | 43.1 AV | 54.0 | -10.9 | 2.15 V | 106 | 40.20 | 2.90 |
| 3 | *5720.00 | 112.3 PK | | | 2.36 V | 97 | 70.70 | 41.60 |
| 4 | *5720.00 | 101.9 AV | | | 2.36 V | 97 | 60.30 | 41.60 |
| 5 | #5850.00 | 57.8 PK | 74.0 | -16.2 | 2.24 V | 115 | 54.10 | 3.70 |
| 6 | #5850.00 | 44.1 AV | 54.0 | -9.9 | 2.24 V | 115 | 40.40 | 3.70 |
| 7 | 11440.00 | 60.8 PK | 74.0 | -13.2 | 2.13 V | 114 | 44.50 | 16.30 |
| 8 | 11440.00 | 50.7 AV | 54.0 | -3.3 | 2.13 V | 114 | 34.40 | 16.30 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT40)

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 54 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5150.00 | 54.8 PK | 74.0 | -19.2 | 1.86 H | 25 | 52.70 | 2.10 |
| 2 | 5150.00 | 42.5 AV | 54.0 | -11.5 | 1.86 H | 25 | 40.40 | 2.10 |
| 3 | *5270.00 | 104.3 PK | | | 1.91 H | 9 | 65.10 | 39.20 |
| 4 | *5270.00 | 94.1 AV | | | 1.91 H | 9 | 54.90 | 39.20 |
| 5 | #10540.00 | 57.8 PK | 74.0 | -16.2 | 1.82 H | 221 | 43.50 | 14.30 |
| 6 | #10540.00 | 45.0 AV | 54.0 | -9.0 | 1.82 H | 221 | 30.70 | 14.30 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5150.00 | 56.9 PK | 74.0 | -17.1 | 2.66 V | 189 | 54.80 | 2.10 |
| 2 | 5150.00 | 44.9 AV | 54.0 | -9.1 | 2.66 V | 189 | 42.80 | 2.10 |
| 3 | *5270.00 | 113.9 PK | | | 3.13 V | 129 | 74.70 | 39.20 |
| 4 | *5270.00 | 103.1 AV | | | 3.13 V | 129 | 63.90 | 39.20 |
| 5 | #10540.00 | 58.8 PK | 74.0 | -15.2 | 1.35 V | 13 | 44.50 | 14.30 |
| 6 | #10540.00 | 46.5 AV | 54.0 | -7.5 | 1.35 V | 13 | 32.20 | 14.30 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 62 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5310.00 | 99.3 PK | | | 1.68 H | 19 | 60.10 | 39.20 |
| 2 | *5310.00 | 89.4 AV | | | 1.68 H | 19 | 50.20 | 39.20 |
| 3 | 5350.00 | 66.3 PK | 74.0 | -7.7 | 1.79 H | 22 | 63.70 | 2.60 |
| 4 | 5350.00 | 48.2 AV | 54.0 | -5.8 | 1.79 H | 22 | 45.60 | 2.60 |
| 5 | 10620.00 | 58.2 PK | 74.0 | -15.8 | 2.24 H | 76 | 43.50 | 14.70 |
| 6 | 10620.00 | 45.2 AV | 54.0 | -8.8 | 2.24 H | 76 | 30.50 | 14.70 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5310.00 | 108.2 PK | | | 3.15 V | 130 | 69.00 | 39.20 |
| 2 | *5310.00 | 97.8 AV | | | 3.15 V | 130 | 58.60 | 39.20 |
| 3 | 5350.00 | 70.8 PK | 74.0 | -3.2 | 3.15 V | 324 | 68.20 | 2.60 |
| 4 | 5350.00 | 53.1 AV | 54.0 | -0.9 | 3.15 V | 324 | 50.50 | 2.60 |
| 5 | 10620.00 | 59.6 PK | 74.0 | -14.4 | 1.77 V | 52 | 44.90 | 14.70 |
| 6 | 10620.00 | 47.2 AV | 54.0 | -6.8 | 1.77 V | 52 | 32.50 | 14.70 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 102 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5430.00 | 59.5 PK | 74.0 | -14.5 | 2.45 H | 341 | 56.80 | 2.70 |
| 2 | 5430.00 | 46.1 AV | 54.0 | -7.9 | 2.45 H | 341 | 43.40 | 2.70 |
| 3 | #5470.00 | 67.2 PK | 74.0 | -6.8 | 2.34 H | 312 | 64.50 | 2.70 |
| 4 | #5470.00 | 49.5 AV | 54.0 | -4.5 | 2.34 H | 312 | 46.80 | 2.70 |
| 5 | *5510.00 | 103.2 PK | | | 2.28 H | 334 | 63.70 | 39.50 |
| 6 | *5510.00 | 93.5 AV | | | 2.28 H | 334 | 54.00 | 39.50 |
| 7 | 11020.00 | 61.1 PK | 74.0 | -12.9 | 2.13 H | 62 | 45.20 | 15.90 |
| 8 | 11020.00 | 47.6 AV | 54.0 | -6.4 | 2.13 H | 62 | 31.70 | 15.90 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5430.00 | 63.7 PK | 74.0 | -10.3 | 3.90 V | 310 | 61.00 | 2.70 |
| 2 | 5430.00 | 48.8 AV | 54.0 | -5.2 | 3.90 V | 310 | 46.10 | 2.70 |
| 3 | #5470.00 | 73.5 PK | 74.0 | -0.5 | 3.88 V | 308 | 70.80 | 2.70 |
| 4 | #5470.00 | 53.5 AV | 54.0 | -0.5 | 3.88 V | 308 | 50.80 | 2.70 |
| 5 | *5510.00 | 108.9 PK | | | 3.82 V | 314 | 69.40 | 39.50 |
| 6 | *5510.00 | 99.0 AV | | | 3.82 V | 314 | 59.50 | 39.50 |
| 7 | 11020.00 | 61.7 PK | 74.0 | -12.3 | 1.57 V | 84 | 45.80 | 15.90 |
| 8 | 11020.00 | 48.2 AV | 54.0 | -5.8 | 1.57 V | 84 | 32.30 | 15.90 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 110 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5460.00 | 60.3 PK | 74.0 | -13.7 | 2.38 H | 349 | 57.60 | 2.70 |
| 2 | 5460.00 | 48.5 AV | 54.0 | -5.5 | 2.38 H | 349 | 45.80 | 2.70 |
| 3 | #5470.00 | 65.1 PK | 74.0 | -8.9 | 2.24 H | 315 | 62.40 | 2.70 |
| 4 | #5470.00 | 50.3 AV | 54.0 | -3.7 | 2.24 H | 315 | 47.60 | 2.70 |
| 5 | *5550.00 | 107.1 PK | | | 2.13 H | 298 | 67.50 | 39.60 |
| 6 | *5550.00 | 97.6 AV | | | 2.13 H | 298 | 58.00 | 39.60 |
| 7 | 11100.00 | 60.7 PK | 74.0 | -13.3 | 2.04 H | 57 | 45.40 | 15.30 |
| 8 | 11100.00 | 46.9 AV | 54.0 | -7.1 | 2.04 H | 57 | 31.60 | 15.30 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5460.00 | 64.7 PK | 74.0 | -9.3 | 3.80 V | 328 | 62.00 | 2.70 |
| 2 | 5460.00 | 52.3 AV | 54.0 | -1.7 | 3.80 V | 328 | 49.60 | 2.70 |
| 3 | #5470.00 | 68.6 PK | 74.0 | -5.4 | 3.90 V | 312 | 65.90 | 2.70 |
| 4 | #5470.00 | 53.1 AV | 54.0 | -0.9 | 3.90 V | 312 | 50.40 | 2.70 |
| 5 | *5550.00 | 113.9 PK | | | 3.74 V | 313 | 74.30 | 39.60 |
| 6 | *5550.00 | 104.0 AV | | | 3.74 V | 313 | 64.40 | 39.60 |
| 7 | 11100.00 | 61.3 PK | 74.0 | -12.7 | 1.68 V | 87 | 46.00 | 15.30 |
| 8 | 11100.00 | 47.7 AV | 54.0 | -6.3 | 1.68 V | 87 | 32.40 | 15.30 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 134 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5670.00 | 105.6 PK | | | 2.35 H | 341 | 65.80 | 39.80 |
| 2 | *5670.00 | 96.3 AV | | | 2.35 H | 341 | 56.50 | 39.80 |
| 3 | #5725.00 | 65.4 PK | 74.0 | -8.6 | 2.21 H | 335 | 62.30 | 3.10 |
| 4 | #5725.00 | 49.6 AV | 54.0 | -4.4 | 2.21 H | 335 | 46.50 | 3.10 |
| 5 | 11340.00 | 60.5 PK | 74.0 | -13.5 | 1.96 H | 62 | 44.70 | 15.80 |
| 6 | 11340.00 | 47.1 AV | 54.0 | -6.9 | 1.96 H | 62 | 31.30 | 15.80 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5670.00 | 112.2 PK | | | 3.49 V | 331 | 72.40 | 39.80 |
| 2 | *5670.00 | 101.4 AV | | | 3.49 V | 331 | 61.60 | 39.80 |
| 3 | #5725.00 | 71.6 PK | 74.0 | -2.4 | 3.49 V | 320 | 68.50 | 3.10 |
| 4 | #5725.00 | 53.3 AV | 54.0 | -0.7 | 3.49 V | 320 | 50.20 | 3.10 |
| 5 | 11340.00 | 61.1 PK | 74.0 | -12.9 | 1.56 V | 74 | 45.30 | 15.80 |
| 6 | 11340.00 | 47.3 AV | 54.0 | -6.7 | 1.56 V | 74 | 31.50 | 15.80 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 142 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5710.00 | 109.4 PK | | | 2.08 H | 94 | 67.80 | 41.60 |
| 2 | *5710.00 | 99.3 AV | | | 2.08 H | 94 | 57.70 | 41.60 |
| 3 | #5850.00 | 61.5 PK | 74.0 | -12.5 | 2.11 H | 97 | 57.80 | 3.70 |
| 4 | #5850.00 | 46.5 AV | 54.0 | -7.5 | 2.11 H | 97 | 42.80 | 3.70 |
| 5 | 11420.00 | 59.5 PK | 74.0 | -14.5 | 2.54 H | 115 | 43.20 | 16.30 |
| 6 | 11420.00 | 47.9 AV | 54.0 | -6.1 | 2.54 H | 115 | 31.60 | 16.30 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5710.00 | 109.0 PK | | | 2.16 V | 97 | 67.40 | 41.60 |
| 2 | *5710.00 | 98.8 AV | | | 2.16 V | 97 | 57.20 | 41.60 |
| 3 | #5850.00 | 61.4 PK | 74.0 | -12.6 | 2.14 V | 95 | 57.70 | 3.70 |
| 4 | #5850.00 | 46.5 AV | 54.0 | -7.5 | 2.14 V | 95 | 42.80 | 3.70 |
| 5 | 11420.00 | 60.2 PK | 74.0 | -13.8 | 2.16 V | 115 | 43.90 | 16.30 |
| 6 | 11420.00 | 49.9 AV | 54.0 | -4.1 | 2.16 V | 115 | 33.60 | 16.30 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT80)

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 58 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5150.00 | 55.5 PK | 74.0 | -18.5 | 1.94 H | 19 | 53.40 | 2.10 |
| 2 | 5150.00 | 42.8 AV | 54.0 | -11.2 | 1.94 H | 19 | 40.70 | 2.10 |
| 3 | *5290.00 | 97.9 PK | | | 2.04 H | 29 | 58.70 | 39.20 |
| 4 | *5290.00 | 88.0 AV | | | 2.04 H | 29 | 48.80 | 39.20 |
| 5 | 5350.00 | 65.9 PK | 74.0 | -8.1 | 1.88 H | 355 | 63.30 | 2.60 |
| 6 | 5350.00 | 49.3 AV | 54.0 | -4.7 | 1.88 H | 355 | 46.70 | 2.60 |
| 7 | #10580.00 | 57.8 PK | 74.0 | -16.2 | 1.99 H | 204 | 43.20 | 14.60 |
| 8 | #10580.00 | 45.1 AV | 54.0 | -8.9 | 1.99 H | 204 | 30.50 | 14.60 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5150.00 | 56.8 PK | 74.0 | -17.2 | 2.95 V | 311 | 54.70 | 2.10 |
| 2 | 5150.00 | 44.5 AV | 54.0 | -9.5 | 2.95 V | 311 | 42.40 | 2.10 |
| 3 | *5290.00 | 104.0 PK | | | 3.05 V | 132 | 64.80 | 39.20 |
| 4 | *5290.00 | 93.3 AV | | | 3.05 V | 132 | 54.10 | 39.20 |
| 5 | 5350.00 | 68.0 PK | 74.0 | -6.0 | 2.85 V | 322 | 65.40 | 2.60 |
| 6 | 5350.00 | 53.3 AV | 54.0 | -0.7 | 2.85 V | 322 | 50.70 | 2.60 |
| 7 | #10580.00 | 59.3 PK | 74.0 | -14.7 | 1.59 V | 61 | 44.70 | 14.60 |
| 8 | #10580.00 | 46.9 AV | 54.0 | -7.1 | 1.59 V | 61 | 32.30 | 14.60 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 106 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5460.00 | 65.1 PK | 74.0 | -8.9 | 2.36 H | 45 | 62.40 | 2.70 |
| 2 | 5460.00 | 49.4 AV | 54.0 | -4.6 | 2.36 H | 45 | 46.70 | 2.70 |
| 3 | #5470.00 | 65.0 PK | 74.0 | -9.0 | 2.21 H | 349 | 62.30 | 2.70 |
| 4 | #5470.00 | 50.4 AV | 54.0 | -3.6 | 2.21 H | 349 | 47.70 | 2.70 |
| 5 | *5530.00 | 97.2 PK | | | 1.98 H | 34 | 57.70 | 39.50 |
| 6 | *5530.00 | 87.2 AV | | | 1.98 H | 34 | 47.70 | 39.50 |
| 7 | #5725.00 | 55.5 PK | 74.0 | -18.5 | 1.93 H | 355 | 52.40 | 3.10 |
| 8 | #5725.00 | 43.8 AV | 54.0 | -10.2 | 1.93 H | 355 | 40.70 | 3.10 |
| 9 | 11060.00 | 59.4 PK | 74.0 | -14.6 | 2.53 H | 33 | 43.70 | 15.70 |
| 10 | 11060.00 | 46.4 AV | 54.0 | -7.6 | 2.53 H | 33 | 30.70 | 15.70 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5460.00 | 65.9 PK | 74.0 | -8.1 | 3.88 V | 300 | 63.20 | 2.70 |
| 2 | 5460.00 | 51.8 AV | 54.0 | -2.2 | 3.88 V | 300 | 49.10 | 2.70 |
| 3 | #5470.00 | 68.4 PK | 74.0 | -5.6 | 3.88 V | 303 | 65.70 | 2.70 |
| 4 | #5470.00 | 53.1 AV | 54.0 | -0.9 | 3.88 V | 303 | 50.40 | 2.70 |
| 5 | *5530.00 | 102.8 PK | | | 3.16 V | 177 | 63.30 | 39.50 |
| 6 | *5530.00 | 91.9 AV | | | 3.16 V | 177 | 52.40 | 39.50 |
| 7 | #5725.00 | 57.6 PK | 74.0 | -16.4 | 3.33 V | 324 | 54.50 | 3.10 |
| 8 | #5725.00 | 45.5 AV | 54.0 | -8.5 | 3.33 V | 324 | 42.40 | 3.10 |
| 9 | 11060.00 | 60.9 PK | 74.0 | -13.1 | 2.74 V | 35 | 45.20 | 15.70 |
| 10 | 11060.00 | 47.6 AV | 54.0 | -6.4 | 2.74 V | 35 | 31.90 | 15.70 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 122 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5460.00 | 60.0 PK | 74.0 | -14.0 | 1.97 H | 354 | 57.30 | 2.70 |
| 2 | 5460.00 | 47.7 AV | 54.0 | -6.3 | 1.97 H | 354 | 45.00 | 2.70 |
| 3 | #5470.00 | 62.2 PK | 74.0 | -11.8 | 2.04 H | 31 | 59.50 | 2.70 |
| 4 | #5470.00 | 49.0 AV | 54.0 | -5.0 | 2.04 H | 31 | 46.30 | 2.70 |
| 5 | *5610.00 | 100.1 PK | | | 2.14 H | 351 | 60.40 | 39.70 |
| 6 | *5610.00 | 90.5 AV | | | 2.14 H | 351 | 50.80 | 39.70 |
| 7 | #5725.00 | 63.3 PK | 74.0 | -10.7 | 2.24 H | 359 | 60.20 | 3.10 |
| 8 | #5725.00 | 48.8 AV | 54.0 | -5.2 | 2.24 H | 359 | 45.70 | 3.10 |
| 9 | 11220.00 | 60.0 PK | 74.0 | -14.0 | 2.41 H | 24 | 44.50 | 15.50 |
| 10 | 11220.00 | 47.9 AV | 54.0 | -6.1 | 2.41 H | 24 | 32.40 | 15.50 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5460.00 | 64.2 PK | 74.0 | -9.8 | 3.46 V | 168 | 61.50 | 2.70 |
| 2 | 5460.00 | 50.1 AV | 54.0 | -3.9 | 3.46 V | 168 | 47.40 | 2.70 |
| 3 | #5470.00 | 67.4 PK | 74.0 | -6.6 | 3.00 V | 164 | 64.70 | 2.70 |
| 4 | #5470.00 | 50.8 AV | 54.0 | -3.2 | 3.00 V | 164 | 48.10 | 2.70 |
| 5 | *5610.00 | 110.8 PK | | | 3.16 V | 157 | 71.10 | 39.70 |
| 6 | *5610.00 | 99.8 AV | | | 3.16 V | 157 | 60.10 | 39.70 |
| 7 | #5725.00 | 68.6 PK | 74.0 | -5.4 | 3.20 V | 319 | 65.50 | 3.10 |
| 8 | #5725.00 | 53.2 AV | 54.0 | -0.8 | 3.20 V | 319 | 50.10 | 3.10 |
| 9 | 11220.00 | 62.8 PK | 74.0 | -11.2 | 2.63 V | 43 | 47.30 | 15.50 |
| 10 | 11220.00 | 50.0 AV | 54.0 | -4.0 | 2.63 V | 43 | 34.50 | 15.50 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 138 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | #5470.00 | 59.5 PK | 74.0 | -14.5 | 2.17 H | 92 | 56.60 | 2.90 |
| 2 | #5470.00 | 46.1 AV | 54.0 | -7.9 | 2.17 H | 92 | 43.20 | 2.90 |
| 3 | *5690.00 | 105.8 PK | | | 2.33 H | 96 | 64.20 | 41.60 |
| 4 | *5690.00 | 95.6 AV | | | 2.33 H | 96 | 54.00 | 41.60 |
| 5 | #5850.00 | 70.4 PK | 74.0 | -3.6 | 2.22 H | 88 | 66.70 | 3.70 |
| 6 | #5850.00 | 51.3 AV | 54.0 | -2.7 | 2.22 H | 88 | 47.60 | 3.70 |
| 7 | 11380.00 | 60.4 PK | 74.0 | -13.6 | 2.19 H | 100 | 44.20 | 16.20 |
| 8 | 11380.00 | 49.3 AV | 54.0 | -4.7 | 2.19 H | 100 | 33.10 | 16.20 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | #5470.00 | 58.3 PK | 74.0 | -15.7 | 2.35 V | 106 | 55.40 | 2.90 |
| 2 | #5470.00 | 44.2 AV | 54.0 | -9.8 | 2.35 V | 106 | 41.30 | 2.90 |
| 3 | *5690.00 | 104.6 PK | | | 2.11 V | 98 | 63.00 | 41.60 |
| 4 | *5690.00 | 95.0 AV | | | 2.11 V | 98 | 53.40 | 41.60 |
| 5 | #5850.00 | 65.8 PK | 74.0 | -8.2 | 2.43 V | 97 | 62.10 | 3.70 |
| 6 | #5850.00 | 50.2 AV | 54.0 | -3.8 | 2.43 V | 97 | 46.50 | 3.70 |
| 7 | 11380.00 | 61.8 PK | 74.0 | -12.2 | 2.25 V | 21 | 45.60 | 16.20 |
| 8 | 11380.00 | 51.4 AV | 54.0 | -2.6 | 2.25 V | 21 | 35.20 | 16.20 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Below 1GHz worst-case data:

802.11a

| | | | |
|-----------------|---------------|-------------------|-----------------|
| CHANNEL | TX Channel 52 | DETECTOR FUNCTION | Quasi-Peak (QP) |
| FREQUENCY RANGE | 9kHz ~ 1GHz | TEST MODE | A |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 30.00 | 28.3 QP | 40.0 | -11.7 | 1.25 H | 72 | 44.30 | -16.00 |
| 2 | 125.06 | 27.2 QP | 43.5 | -16.3 | 2.00 H | 78 | 42.60 | -15.40 |
| 3 | 375.32 | 29.8 QP | 46.0 | -16.2 | 1.01 H | 248 | 39.20 | -9.40 |
| 4 | 499.48 | 29.7 QP | 46.0 | -16.3 | 2.00 H | 319 | 36.20 | -6.50 |
| 5 | 625.58 | 36.1 QP | 46.0 | -9.9 | 1.25 H | 91 | 39.10 | -3.00 |
| 6 | 899.12 | 36.4 QP | 46.0 | -9.6 | 1.50 H | 201 | 33.70 | 2.70 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 45.52 | 33.1 QP | 40.0 | -6.9 | 1.00 V | 8 | 47.40 | -14.30 |
| 2 | 74.62 | 29.5 QP | 40.0 | -10.5 | 1.99 V | 236 | 46.10 | -16.60 |
| 3 | 111.48 | 27.1 QP | 43.5 | -16.4 | 1.00 V | 282 | 43.80 | -16.70 |
| 4 | 288.02 | 25.3 QP | 46.0 | -20.7 | 1.50 V | 32 | 36.70 | -11.40 |
| 5 | 740.04 | 38.4 QP | 46.0 | -7.6 | 1.50 V | 83 | 39.10 | -0.70 |
| 6 | 833.16 | 34.8 QP | 46.0 | -11.2 | 1.50 V | 294 | 33.50 | 1.30 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

| | | | |
|-----------------|---------------|-------------------|-----------------|
| CHANNEL | TX Channel 52 | DETECTOR FUNCTION | Quasi-Peak (QP) |
| FREQUENCY RANGE | 9kHz ~ 1GHz | TEST MODE | B |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 61.04 | 27.8 QP | 40.0 | -12.2 | 1.99 H | 285 | 42.40 | -14.60 |
| 2 | 289.96 | 31.1 QP | 46.0 | -14.9 | 1.00 H | 229 | 42.50 | -11.40 |
| 3 | 361.74 | 31.2 QP | 46.0 | -14.8 | 1.00 H | 229 | 41.00 | -9.80 |
| 4 | 460.68 | 28.9 QP | 46.0 | -17.1 | 1.99 H | 249 | 36.20 | -7.30 |
| 5 | 821.52 | 33.6 QP | 46.0 | -12.4 | 1.50 H | 122 | 32.50 | 1.10 |
| 6 | 875.84 | 35.8 QP | 46.0 | -10.2 | 1.50 H | 223 | 33.60 | 2.20 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 66.86 | 34.5 QP | 40.0 | -5.5 | 2.00 V | 0 | 49.90 | -15.40 |
| 2 | 109.54 | 25.8 QP | 43.5 | -17.7 | 1.01 V | 291 | 42.70 | -16.90 |
| 3 | 299.66 | 26.1 QP | 46.0 | -19.9 | 2.00 V | 289 | 37.30 | -11.20 |
| 4 | 474.26 | 27.5 QP | 46.0 | -18.5 | 1.26 V | 219 | 34.50 | -7.00 |
| 5 | 643.04 | 30.4 QP | 46.0 | -15.6 | 1.26 V | 336 | 33.30 | -2.90 |
| 6 | 885.54 | 35.9 QP | 46.0 | -10.1 | 1.50 V | 355 | 33.50 | 2.40 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

| Frequency (MHz) | Conducted Limit (dBuV) | |
|-----------------|------------------------|---------|
| | Quasi-peak | Average |
| 0.15 - 0.5 | 66 - 56 | 56 - 46 |
| 0.50 - 5.0 | 56 | 46 |
| 5.0 - 30.0 | 60 | 50 |

- Note:** 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Tested date: May 20, 2017

| Description & Manufacturer | Model No. | Serial No. | Cal. Date | Cal. Due |
|--|--------------------------|----------------|---------------|---------------|
| Test Receiver ROHDE & SCHWARZ | ESCI | 100613 | Nov. 21, 2016 | Nov. 20, 2017 |
| RF signal cable (with 10dB PAD) Woken | 5D-FB | Cable-cond1-01 | Dec. 22, 2016 | Dec. 21, 2017 |
| LISN ROHDE & SCHWARZ (EUT) | ESH3-Z5 | 835239/001 | Mar. 10, 2017 | Mar. 09, 2018 |
| LISN ROHDE & SCHWARZ (Peripheral) | ESH3-Z5 | 100311 | Jul. 28, 2016 | Jul. 27, 2017 |
| Software ADT | BV ADT_Cond_ V7.3.7.3 | NA | NA | NA |

- Note:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.

4.2.3 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

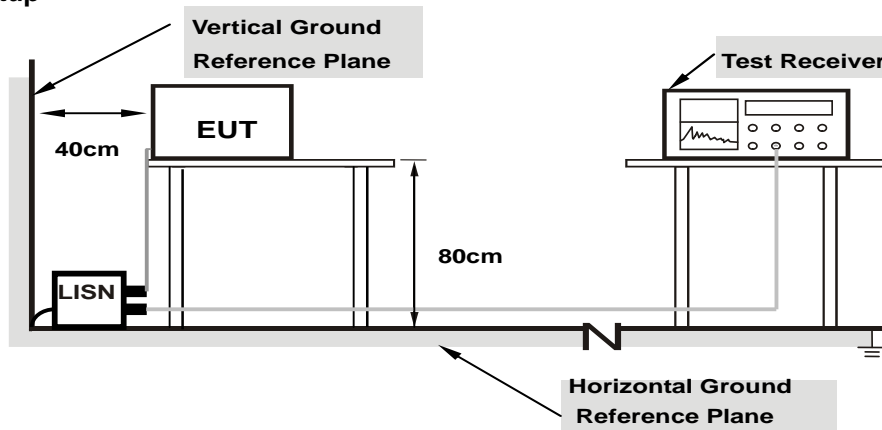

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.

4.2.7 Test Results


Worst-case data: 802.11a

| | | | |
|-----------|----------|-------------------|--------------------------------|
| Phase | Line (L) | Detector Function | Quasi-Peak (QP) / Average (AV) |
| Test Mode | A | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-------|----------------|-------|-----------|-------|--------|--------|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.16233 | 10.41 | 37.63 | 23.46 | 48.04 | 33.87 | 65.34 | 55.34 | -17.30 | -21.47 |
| 2 | 0.18600 | 10.42 | 33.06 | 19.72 | 43.48 | 30.14 | 64.21 | 54.21 | -20.73 | -24.07 |
| 3 | 0.38117 | 10.50 | 35.46 | 26.42 | 45.96 | 36.92 | 58.25 | 48.25 | -12.29 | -11.33 |
| 4 | 1.17800 | 10.47 | 18.01 | 9.82 | 28.48 | 20.29 | 56.00 | 46.00 | -27.52 | -25.71 |
| 5 | 5.12200 | 10.70 | 14.08 | 5.71 | 24.78 | 16.41 | 60.00 | 50.00 | -35.22 | -33.59 |
| 6 | 11.86200 | 10.99 | 6.59 | 0.93 | 17.58 | 11.92 | 60.00 | 50.00 | -42.42 | -38.08 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

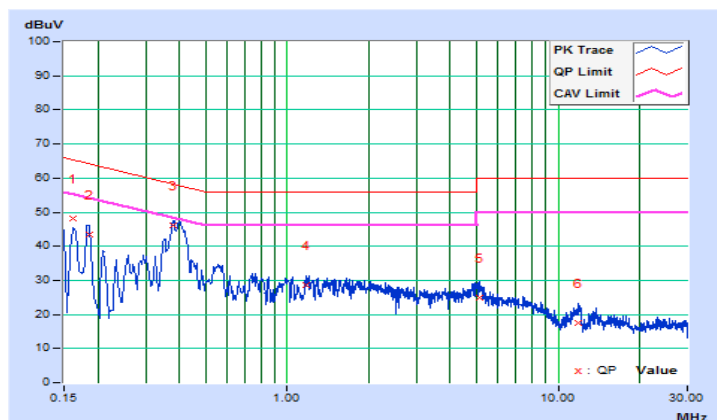


| | | | |
|-----------|-------------|-------------------|--------------------------------|
| Phase | Neutral (N) | Detector Function | Quasi-Peak (QP) / Average (AV) |
| Test Mode | A | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----------|----------------|----------------------|----------------------------|--------------|-----------------------------|--------------|--------------------|--------------|----------------|--------------|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | | | 1 | 0.16600 | 10.17 | 33.75 | 19.82 | 43.92 | 29.99 | 65.16 |
| 2 | 0.20201 | 10.20 | 24.99 | 8.48 | 35.19 | 18.68 | 63.53 | 53.53 | -28.34 | -34.85 |
| 3 | 0.29400 | 10.21 | 27.59 | 19.42 | 37.80 | 29.63 | 60.41 | 50.41 | -22.61 | -20.78 |
| 4 | 0.38600 | 10.23 | 37.87 | 27.96 | 48.10 | 38.19 | 58.15 | 48.15 | -10.05 | -9.96 |
| 5 | 0.77000 | 10.24 | 21.38 | 13.31 | 31.62 | 23.55 | 56.00 | 46.00 | -24.38 | -22.45 |
| 6 | 3.65800 | 10.40 | 15.78 | 8.55 | 26.18 | 18.95 | 56.00 | 46.00 | -29.82 | -27.05 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

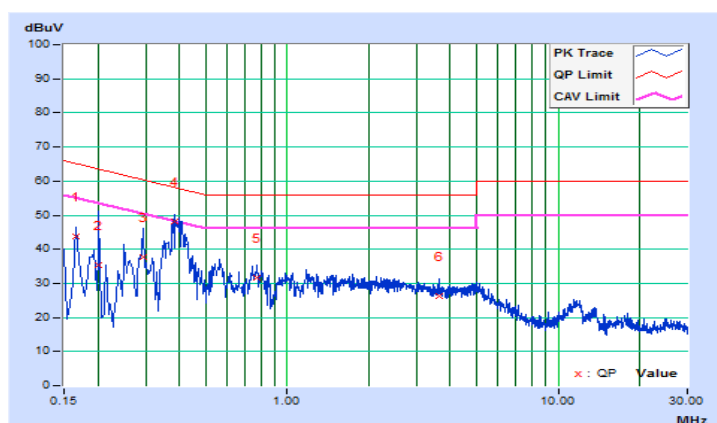


| | | | |
|-----------|----------|-------------------|--------------------------------|
| Phase | Line (L) | Detector Function | Quasi-Peak (QP) / Average (AV) |
| Test Mode | B | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|----------------------|----------------------------|---------|-----------------------------|-------|--------------------|-------|----------------|--------|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | | | 1 | 0.15060 | 10.41 | 37.18 | 21.50 | 47.59 | 31.91 | 65.97 |
| 2 | 0.16936 | 10.41 | 39.49 | 26.19 | 49.90 | 36.60 | 64.99 | 54.99 | -15.09 | -18.39 |
| 3 | 0.20601 | 10.43 | 33.75 | 22.25 | 44.18 | 32.68 | 63.36 | 53.36 | -19.18 | -20.68 |
| 4 | 0.23910 | 10.45 | 30.21 | 19.15 | 40.66 | 29.60 | 62.13 | 52.13 | -21.47 | -22.53 |
| 5 | 0.41038 | 10.51 | 29.15 | 22.62 | 39.66 | 33.13 | 57.64 | 47.64 | -17.98 | -14.51 |
| 6 | 23.68211 | 11.55 | 26.61 | 21.33 | 38.16 | 32.88 | 60.00 | 50.00 | -21.84 | -17.12 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

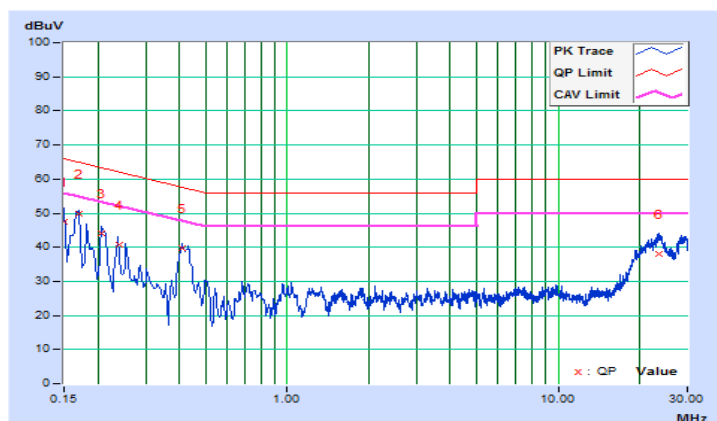


| | | | |
|-----------|-------------|-------------------|--------------------------------|
| Phase | Neutral (N) | Detector Function | Quasi-Peak (QP) / Average (AV) |
| Test Mode | B | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|-------------------------|----------------------------|---------|-----------------------------|-------|--------------------|-------|----------------|--------|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | | | 1 | 0.17803 | 10.18 | 37.27 | 23.91 | 47.45 | 34.09 | 64.58 |
| 2 | 0.20096 | 10.20 | 33.40 | 19.92 | 43.60 | 30.12 | 63.57 | 53.57 | -19.97 | -23.45 |
| 3 | 0.41010 | 10.23 | 27.15 | 20.84 | 37.38 | 31.07 | 57.65 | 47.65 | -20.27 | -16.58 |
| 4 | 0.72201 | 10.24 | 14.80 | 9.40 | 25.04 | 19.64 | 56.00 | 46.00 | -30.96 | -26.36 |
| 5 | 23.49815 | 11.13 | 26.32 | 20.89 | 37.45 | 32.02 | 60.00 | 50.00 | -22.55 | -17.98 |
| 6 | 28.29019 | 11.24 | 25.80 | 20.51 | 37.04 | 31.75 | 60.00 | 50.00 | -22.96 | -18.25 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

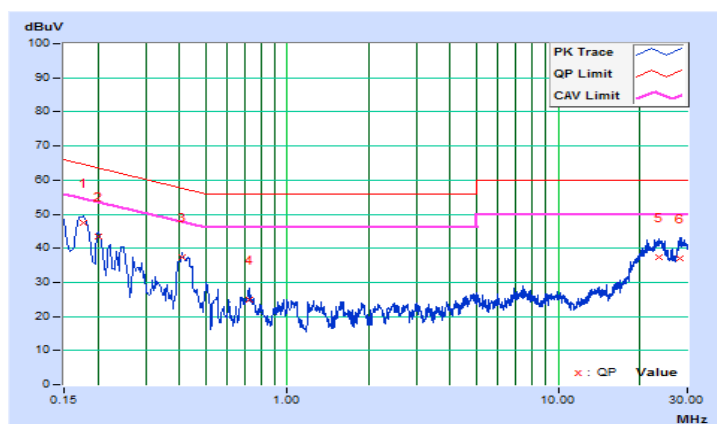

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

| Operation Band | EUT Category | | LIMIT |
|----------------|--------------|---|---|
| U-NII-1 | - | Outdoor Wi-Fi & BLE Array AP | 1 Watt (30 dBm) (Max. e.i.r.p \leq 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon) |
| | - | Fixed point-to-point Wi-Fi & BLE Array AP | 1 Watt (30 dBm) |
| | - | Indoor Wi-Fi & BLE Array AP | 1 Watt (30 dBm) |
| | - | Mobile and Portable client device | 250mW (24 dBm) |
| U-NII-2A | √ | | 250mW (24 dBm) or 11 dBm+10 log B* |
| U-NII-2C | √ | | 250mW (24 dBm) or 11 dBm+10 log B* |
| U-NII-3 | √ | | 1 Watt (30 dBm) |

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;


Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.


4.3.2 Test Setup

For Power Output Measurement


For 802.11a, 802.11n (HT20), 802.11n (HT40), 802.11ac (VHT20), 802.11ac (VHT40)

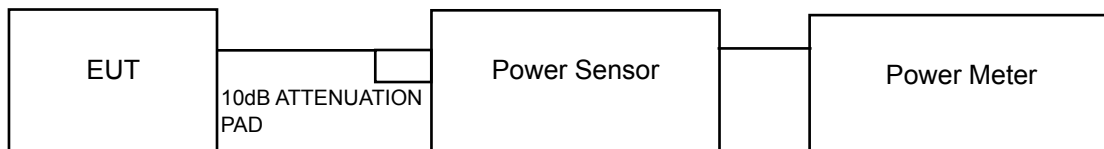

For 802.11ac (VHT80)

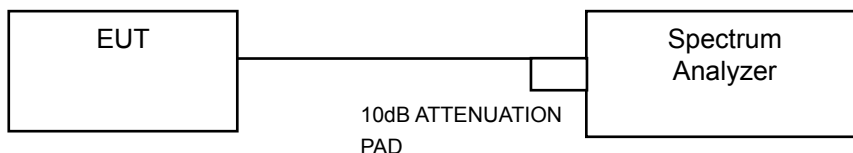

For 26dB Bandwidth

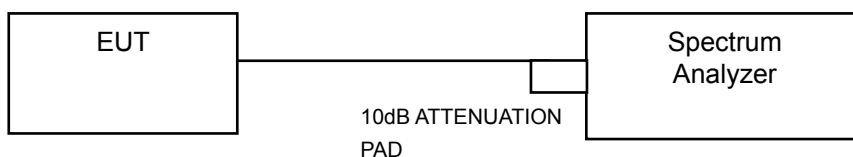

4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

For Average Power Measurement

For 802.11a, 802.11n (HT20), 802.11n (HT40), 802.11ac (VHT20), 802.11ac (VHT40)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to AVERAGE. Duty factor is not added to measured value.

For 802.11ac (VHT80)

- 1) Set span to encompass the entire 26 dB EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- 2) Set sweep trigger to "free run".
- 3) Set RBW = 1 MHz.
- 4) Set VBW \geq 3 MHz
- 5) Number of points in sweep \geq 2 Span / RBW.
- 6) Sweep time \leq (number of points in sweep) * T
- 7) Using emission bandwidth to determine the frequency span for integration the channel bandwidth.
- 8) Detector = RMS.
- 9) Trace mode = max hold.
- 10) Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.

For 26dB Bandwidth

- 1) Set RBW = approximately 1% of the emission bandwidth.
- 2) Set the VBW > RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

POWER OUTPUT:

CDD Mode, 1TX

802.11a

| Chan. | Freq. (MHz) | Maximum Conducted Power (mW) | Maximum Conducted Power (dBm) | Power Limit (dBm) | Pass / Fail |
|-------|----------------------|------------------------------|-------------------------------|-------------------|-------------|
| 52 | 5260 | 129.420 | 21.12 | 24.00 | Pass |
| 60 | 5300 | 80.910 | 19.08 | 24.00 | Pass |
| 64 | 5320 | 93.541 | 19.71 | 24.00 | Pass |
| 100 | 5500 | 97.724 | 19.90 | 24.00 | Pass |
| 116 | 5580 | 212.324 | 23.27 | 24.00 | Pass |
| 140 | 5700 | 71.121 | 18.52 | 24.00 | Pass |
| 144 | 5720 For U-NII-2C | 61.518 | 17.89 | 24.00 | Pass |
| 144 | 5720 For U-NII-3 | 15.849 | 12.00 | 30.00 | Pass |

Note:

1. $11\text{dBm} + 10\log (40.31) = 27.05 > 24\text{dBm}$
2. $11\text{dBm} + 10\log (33.25) = 26.22 > 24\text{dBm}$
3. $11\text{dBm} + 10\log (33.38) = 26.23 > 24\text{dBm}$
4. $11\text{dBm} + 10\log (33.17) = 26.21 > 24\text{dBm}$
5. $11\text{dBm} + 10\log (45.37) = 27.57 > 24\text{dBm}$
6. $11\text{dBm} + 10\log (22.27) = 24.48 > 24\text{dBm}$
7. $11\text{dBm} + 10\log(5725.00 - 5697.42) = 25.41 \text{ dBm} > 24\text{dBm}.$

802.11n (HT20)

| Chan. | Freq. (MHz) | Maximum Conducted Power (mW) | Maximum Conducted Power (dBm) | Power Limit (dBm) | Pass / Fail |
|-------|----------------------|------------------------------|-------------------------------|-------------------|-------------|
| 52 | 5260 | 133.968 | 21.27 | 24.00 | Pass |
| 60 | 5300 | 154.170 | 21.88 | 24.00 | Pass |
| 64 | 5320 | 89.331 | 19.51 | 24.00 | Pass |
| 100 | 5500 | 89.950 | 19.54 | 24.00 | Pass |
| 116 | 5580 | 221.820 | 23.46 | 24.00 | Pass |
| 140 | 5700 | 70.795 | 18.50 | 24.00 | Pass |
| 144 | 5720 For U-NII-2C | 63.241 | 18.01 | 24.00 | Pass |
| 144 | 5720 For U-NII-3 | 18.030 | 12.56 | 30.00 | Pass |

Note:

1. $11\text{dBm} + 10\log (45.15) = 27.55 > 24\text{dBm}$
2. $11\text{dBm} + 10\log (46.71) = 27.69 > 24\text{dBm}$
3. $11\text{dBm} + 10\log (39.08) = 26.92 > 24\text{dBm}$
4. $11\text{dBm} + 10\log (36.54) = 26.63 > 24\text{dBm}$
5. $11\text{dBm} + 10\log (48.72) = 27.88 > 24\text{dBm}$
6. $11\text{dBm} + 10\log (30.62) = 25.86 > 24\text{dBm}$
7. $11\text{dBm} + 10\log(5725.00 - 5696.10) = 25.61 \text{ dBm} > 24\text{dBm}.$

802.11n (HT40)

| Chan. | Freq. (MHz) | Maximum Conducted Power (mW) | Maximum Conducted Power (dBm) | Power Limit (dBm) | Pass / Fail |
|-------|----------------------|------------------------------|-------------------------------|-------------------|-------------|
| 54 | 5270 | 143.219 | 21.56 | 24.00 | Pass |
| 62 | 5310 | 35.400 | 15.49 | 24.00 | Pass |
| 102 | 5510 | 34.995 | 15.44 | 24.00 | Pass |
| 110 | 5550 | 117.490 | 20.70 | 24.00 | Pass |
| 134 | 5670 | 81.283 | 19.10 | 24.00 | Pass |
| 142 | 5710 For U-NII-2C | 67.784 | 18.31 | 24.00 | Pass |
| 142 | 5710 For U-NII-3 | 7.693 | 8.86 | 30.00 | Pass |

Note:

1. $11\text{dBm} + 10\log(99.10) = 30.96 \text{ dBm} > 24\text{dBm}$
2. $11\text{dBm} + 10\log(45.52) = 27.58 \text{ dBm} > 24\text{dBm}$
3. $11\text{dBm} + 10\log(41.38) = 27.17 \text{ dBm} > 24\text{dBm}$
4. $11\text{dBm} + 10\log(95.94) = 30.82 \text{ dBm} > 24\text{dBm}$
5. $11\text{dBm} + 10\log(85.86) = 30.34 \text{ dBm} > 24\text{dBm}$
6. $11\text{dBm} + 10\log(5725.00 - 5660.00) = 29.13 \text{ dBm} > 24\text{dBm}.$

802.11ac (VHT80)

| Chan. | Freq. (MHz) | Maximum Conducted Power (mW) | Maximum Conducted Power (dBm) | Power Limit (dBm) | Pass / Fail |
|-------|----------------------|------------------------------|-------------------------------|-------------------|-------------|
| 58 | 5290 | 28.184 | 14.50 | 24.00 | Pass |
| 106 | 5530 | 29.040 | 14.63 | 24.00 | Pass |
| 122 | 5610 | 114.288 | 20.58 | 24.00 | Pass |
| 138 | 5690 For U-NII-2C | 55.489 | 17.44 | 24.00 | Pass |
| 138 | 5690 For U-NII-3 | 2.973 | 4.73 | 30.00 | Pass |

Note:

1. $11\text{dBm} + 10\log(83.35) = 30.21 \text{ dBm} > 24\text{dBm}$
2. $11\text{dBm} + 10\log(83.14) = 30.20 \text{ dBm} > 24\text{dBm}$
3. $11\text{dBm} + 10\log(165.81) = 33.20 \text{ dBm} > 24\text{dBm}$
4. $11\text{dBm} + 10\log(5725.00 - 5593.57) = 32.19 \text{ dBm} > 24\text{dBm}.$

CDD Mode, 2TX

802.11a

| Chan. | Freq. (MHz) | Maximum Conducted Power (dBm) | | Total Power (mW) | Total Power (dBm) | Power Limit (dBm) | Pass / Fail |
|-------|----------------------|-------------------------------|---------|------------------|-------------------|-------------------|-------------|
| | | Chain 0 | Chain 1 | | | | |
| 52 | 5260 | 18.22 | 18.21 | 132.596 | 21.23 | 24.00 | Pass |
| 60 | 5300 | 18.16 | 18.18 | 131.230 | 21.18 | 24.00 | Pass |
| 64 | 5320 | 17.89 | 17.97 | 124.179 | 20.94 | 24.00 | Pass |
| 100 | 5500 | 18.25 | 18.56 | 138.613 | 21.42 | 24.00 | Pass |
| 116 | 5580 | 18.44 | 18.55 | 141.437 | 21.51 | 24.00 | Pass |
| 140 | 5700 | 17.86 | 17.73 | 120.387 | 20.81 | 24.00 | Pass |
| 144 | 5720 For U-NII-2C | 15.53 | 15.29 | 69.533 | 18.42 | 24.00 | Pass |
| 144 | 5720 For U-NII-3 | 9.57 | 9.74 | 18.476 | 12.67 | 30.00 | Pass |

Note:

Chain 0

1. $11\text{dBm} + 10\log (29.30) = 25.67 > 24\text{dBm}$
2. $11\text{dBm} + 10\log (23.37) = 24.69 > 24\text{dBm}$
3. $11\text{dBm} + 10\log (28.61) = 25.57 > 24\text{dBm}$
4. $11\text{dBm} + 10\log (22.17) = 24.46 > 24\text{dBm}$
5. $11\text{dBm} + 10\log (21.43) = 24.31 > 24\text{dBm}$
6. $11\text{dBm} + 10\log (21.68) = 24.36 > 24\text{dBm}$
7. $11\text{dBm} + 10\log(5725.00 - 5702.32) = 24.56 \text{ dBm} > 24\text{dBm}$.

Chain 1

1. $11\text{dBm} + 10\log (22.07) = 24.44 > 24\text{dBm}$
2. $11\text{dBm} + 10\log (22.86) = 24.59 > 24\text{dBm}$
3. $11\text{dBm} + 10\log (23.07) = 24.63 > 24\text{dBm}$
4. $11\text{dBm} + 10\log (21.27) = 24.28 > 24\text{dBm}$
5. $11\text{dBm} + 10\log (21.56) = 24.34 > 24\text{dBm}$
6. $11\text{dBm} + 10\log (21.82) = 24.39 > 24\text{dBm}$
7. $11\text{dBm} + 10\log(5725.00 - 5704.44) = 24.13 \text{ dBm} > 24\text{dBm}$.

802.11n (HT20)

| Chan. | Freq. (MHz) | Maximum Conducted Power (dBm) | | Total Power (mW) | Total Power (dBm) | Power Limit (dBm) | Pass / Fail |
|-------|----------------------|-------------------------------|---------|------------------|-------------------|-------------------|-------------|
| | | Chain 0 | Chain 1 | | | | |
| 52 | 5260 | 18.70 | 18.77 | 149.467 | 21.75 | 24.00 | Pass |
| 60 | 5300 | 18.64 | 18.73 | 147.759 | 21.70 | 24.00 | Pass |
| 64 | 5320 | 18.70 | 18.67 | 147.752 | 21.70 | 24.00 | Pass |
| 100 | 5500 | 18.44 | 18.50 | 140.618 | 21.48 | 24.00 | Pass |
| 116 | 5580 | 18.91 | 18.96 | 156.509 | 21.95 | 24.00 | Pass |
| 140 | 5700 | 17.11 | 17.24 | 104.370 | 20.19 | 24.00 | Pass |
| 144 | 5720 For U-NII-2C | 15.35 | 15.16 | 67.087 | 18.27 | 24.00 | Pass |
| 144 | 5720 For U-NII-3 | 9.80 | 9.84 | 19.188 | 12.83 | 30.00 | Pass |

Note:

Chain 0

1. $11\text{dBm} + 10\log(33.02) = 26.19\text{ dBm} > 24\text{dBm}$
2. $11\text{dBm} + 10\log(30.75) = 25.88\text{ dBm} > 24\text{dBm}$
3. $11\text{dBm} + 10\log(32.83) = 26.16\text{ dBm} > 24\text{dBm}$
4. $11\text{dBm} + 10\log(31.27) = 25.95\text{ dBm} > 24\text{dBm}$
5. $11\text{dBm} + 10\log(29.54) = 25.70\text{ dBm} > 24\text{dBm}$
6. $11\text{dBm} + 10\log(24.19) = 24.84\text{ dBm} > 24\text{dBm}$
7. $11\text{dBm} + 10\log(5725.00 - 5698.74) = 25.19\text{ dBm} > 24\text{dBm}$

Chain 1

1. $11\text{dBm} + 10\log(30.89) = 25.90\text{ dBm} > 24\text{dBm}$
2. $11\text{dBm} + 10\log(29.89) = 25.76\text{ dBm} > 24\text{dBm}$
3. $11\text{dBm} + 10\log(28.35) = 25.53\text{ dBm} > 24\text{dBm}$
4. $11\text{dBm} + 10\log(26.10) = 25.17\text{ dBm} > 24\text{dBm}$
5. $11\text{dBm} + 10\log(24.92) = 24.97\text{ dBm} > 24\text{dBm}$
6. $11\text{dBm} + 10\log(22.32) = 24.49\text{ dBm} > 24\text{dBm}$
7. $11\text{dBm} + 10\log(5725.00 - 5700.18) = 24.95\text{ dBm} > 24\text{dBm}$

802.11n (HT40)

| Chan. | Freq. (MHz) | Maximum Conducted Power (dBm) | | Total Power (mW) | Total Power (dBm) | Power Limit (dBm) | Pass / Fail |
|-------|----------------------|-------------------------------|---------|------------------|-------------------|-------------------|-------------|
| | | Chain 0 | Chain 1 | | | | |
| 54 | 5270 | 20.77 | 20.86 | 241.298 | 23.83 | 24.00 | Pass |
| 62 | 5310 | 18.32 | 18.46 | 138.066 | 21.40 | 24.00 | Pass |
| 102 | 5510 | 14.48 | 14.54 | 56.4990 | 17.52 | 24.00 | Pass |
| 110 | 5550 | 20.14 | 20.14 | 206.552 | 23.15 | 24.00 | Pass |
| 134 | 5670 | 19.15 | 19.02 | 162.023 | 22.10 | 24.00 | Pass |
| 142 | 5710 For U-NII-2C | 15.67 | 15.58 | 75.688 | 18.79 | 24.00 | Pass |
| 142 | 5710 For U-NII-3 | 5.85 | 5.71 | 7.845 | 8.95 | 30.00 | Pass |

Note:

Chain 0

1. $11\text{dBm} + 10\log(96.37) = 30.84\text{ dBm} > 24\text{dBm}$
2. $11\text{dBm} + 10\log(42.46) = 27.28\text{ dBm} > 24\text{dBm}$
3. $11\text{dBm} + 10\log(41.35) = 27.16\text{ dBm} > 24\text{dBm}$
4. $11\text{dBm} + 10\log(85.58) = 30.32\text{ dBm} > 24\text{dBm}$
5. $11\text{dBm} + 10\log(75.10) = 29.76\text{ dBm} > 24\text{dBm}$
6. $11\text{dBm} + 10\log(5725.00 - 5672.34) = 28.21\text{ dBm} > 24\text{dBm}$.

Chain 1

1. $11\text{dBm} + 10\log(93.66) = 30.72\text{ dBm} > 24\text{dBm}$
2. $11\text{dBm} + 10\log(41.12) = 27.14\text{ dBm} > 24\text{dBm}$
3. $11\text{dBm} + 10\log(40.96) = 27.12\text{ dBm} > 24\text{dBm}$
4. $11\text{dBm} + 10\log(86.25) = 30.36\text{ dBm} > 24\text{dBm}$
5. $11\text{dBm} + 10\log(77.95) = 29.92\text{ dBm} > 24\text{dBm}$
6. $11\text{dBm} + 10\log(5725.00 - 5669.93) = 28.41\text{ dBm} > 24\text{dBm}$.

802.11ac (VHT80)

| Chan. | Freq. (MHz) | Maximum Conducted Power (dBm) | | Total Power (mW) | Total Power (dBm) | Power Limit (dBm) | Pass / Fail |
|-------|----------------------|-------------------------------|---------|------------------|-------------------|-------------------|-------------|
| | | Chain 0 | Chain 1 | | | | |
| 58 | 5290 | 13.98 | 14.11 | 50.766 | 17.06 | 24.00 | Pass |
| 106 | 5530 | 14.16 | 14.27 | 52.792 | 17.23 | 24.00 | Pass |
| 122 | 5610 | 19.43 | 19.32 | 173.207 | 22.39 | 24.00 | Pass |
| 138 | 5690 For U-NII-2C | 16.01 | 16.30 | 82.56 | 19.17 | 24.00 | Pass |
| 138 | 5690 For U-NII-3 | 3.01 | 2.97 | 3.982 | 6.00 | 30.00 | Pass |

Note:

Chain 0

1. $11\text{dBm} + 10\log (83.19) = 30.20 > 24\text{dBm}$
2. $11\text{dBm} + 10\log (82.97) = 30.19 > 24\text{dBm}$
3. $11\text{dBm} + 10\log (144.04) = 32.58 > 24\text{dBm}$
4. $11\text{dBm} + 10\log(5725.00 - 5614.28) = 31.44 \text{ dBm} > 24\text{dBm}.$

Chain 1

1. $11\text{dBm} + 10\log (83.01) = 30.19 > 24\text{dBm}$
2. $11\text{dBm} + 10\log (83.06) = 30.19 > 24\text{dBm}$
3. $11\text{dBm} + 10\log (144.16) = 32.59 > 24\text{dBm}$
4. $11\text{dBm} + 10\log(5725.00 - 5607.43) = 31.07 \text{ dBm} > 24\text{dBm}.$

Beamforming Mode

802.11n (HT20)

| Chan. | Freq. (MHz) | Maximum Conducted Power (dBm) | | Total Power (mW) | Total Power (dBm) | Power Limit (dBm) | Pass / Fail |
|-------|----------------------|-------------------------------|---------|------------------|-------------------|-------------------|-------------|
| | | Chain 0 | Chain 1 | | | | |
| 52 | 5260 | 18.70 | 18.77 | 149.467 | 21.75 | 22.13 | Pass |
| 60 | 5300 | 18.64 | 18.73 | 147.759 | 21.70 | 22.13 | Pass |
| 64 | 5320 | 18.70 | 18.67 | 147.752 | 21.70 | 22.13 | Pass |
| 100 | 5500 | 18.44 | 18.50 | 140.618 | 21.48 | 22.42 | Pass |
| 116 | 5580 | 18.91 | 18.96 | 156.509 | 21.95 | 22.42 | Pass |
| 140 | 5700 | 17.11 | 17.24 | 104.370 | 20.19 | 22.42 | Pass |
| 144 | 5720 For U-NII-2C | 15.35 | 15.16 | 67.087 | 18.27 | 22.42 | Pass |
| 144 | 5720 For U-NII-3 | 9.80 | 9.84 | 19.188 | 12.83 | 28.03 | Pass |

* U-NII-2A: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N] = 7.87\text{dBi} > 6\text{dBi}$, so the limit shall be reduced to $24 - (7.87 - 6) = 22.13\text{dBm}$.

U-NII-2C: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N] = 7.58\text{dBi} > 6\text{dBi}$, so the limit shall be reduced to $24 - (7.58 - 6) = 22.42\text{dBm}$.

* For U-NII-3: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N] = 7.97\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (7.97 - 6) = 28.03\text{dBm}$.

Note:

Chain 0

1. $11\text{dBm} + 10\log(33.02) = 26.19\text{dBm} > 24\text{dBm}$
2. $11\text{dBm} + 10\log(30.75) = 25.88\text{dBm} > 24\text{dBm}$
3. $11\text{dBm} + 10\log(32.83) = 26.16\text{dBm} > 24\text{dBm}$
4. $11\text{dBm} + 10\log(31.27) = 25.95\text{dBm} > 24\text{dBm}$
5. $11\text{dBm} + 10\log(29.54) = 25.70\text{dBm} > 24\text{dBm}$
6. $11\text{dBm} + 10\log(24.19) = 24.84\text{dBm} > 24\text{dBm}$
7. $11\text{dBm} + 10\log(5725.00 - 5698.74) = 25.19\text{dBm} > 24\text{dBm}$

Chain 1

1. $11\text{dBm} + 10\log(30.89) = 25.90\text{dBm} > 24\text{dBm}$
2. $11\text{dBm} + 10\log(29.89) = 25.76\text{dBm} > 24\text{dBm}$
3. $11\text{dBm} + 10\log(28.35) = 25.53\text{dBm} > 24\text{dBm}$
4. $11\text{dBm} + 10\log(26.10) = 25.17\text{dBm} > 24\text{dBm}$
5. $11\text{dBm} + 10\log(24.92) = 24.97\text{dBm} > 24\text{dBm}$
6. $11\text{dBm} + 10\log(22.32) = 24.49\text{dBm} > 24\text{dBm}$
7. $11\text{dBm} + 10\log(5725.00 - 5700.18) = 24.95\text{dBm} > 24\text{dBm}$

802.11n (HT40)

| Chan. | Freq. (MHz) | Maximum Conducted Power (dBm) | | Total Power (mW) | Total Power (dBm) | Power Limit (dBm) | Pass / Fail |
|-------|----------------------|-------------------------------|---------|------------------|-------------------|-------------------|-------------|
| | | Chain 0 | Chain 1 | | | | |
| 54 | 5270 | 18.90 | 18.61 | 150.236 | 21.77 | 22.13 | Pass |
| 62 | 5310 | 14.85 | 14.73 | 60.266 | 17.80 | 22.13 | Pass |
| 102 | 5510 | 14.48 | 14.54 | 56.499 | 17.52 | 22.42 | Pass |
| 110 | 5550 | 18.90 | 18.64 | 150.739 | 21.78 | 22.42 | Pass |
| 134 | 5670 | 18.95 | 18.55 | 150.138 | 21.76 | 22.42 | Pass |
| 142 | 5710 For U-NII-2C | 15.67 | 15.58 | 75.688 | 18.79 | 22.42 | Pass |
| 142 | 5710 For U-NII-3 | 5.85 | 5.71 | 7.845 | 8.95 | 28.03 | Pass |

* U-NII-2A: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 7.87dBi > 6dBi, so the limit shall be reduced to 24-(7.87-6) = 22.13dBm.

U-NII-2C: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 7.58dBi > 6dBi, so the limit shall be reduced to 24-(7.58-6) = 22.42dBm.

* For U-NII-3: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 7.97dBi > 6dBi, so the power limit shall be reduced to 30-(7.97-6) = 28.03dBm.

Note:

Chain 0

1. 11dBm + 10log(96.37) = 30.84 dBm > 24dBm
2. 11dBm + 10log(42.46) = 27.28 dBm > 24dBm
3. 11dBm + 10log(41.35) = 27.16 dBm > 24dBm
4. 11dBm + 10log(85.58) = 30.32 dBm > 24dBm
5. 11dBm + 10log(75.10) = 29.76 dBm > 24dBm
6. 11dBm + 10log(5725.00 - 5672.34) = 28.21 dBm > 24dBm.

Chain 1

1. 11dBm + 10log(93.66) = 30.72 dBm > 24dBm
2. 11dBm + 10log(41.12) = 27.14 dBm > 24dBm
3. 11dBm + 10log(40.96) = 27.12 dBm > 24dBm
4. 11dBm + 10log(86.25) = 30.36 dBm > 24dBm
5. 11dBm + 10log(77.95) = 29.92 dBm > 24dBm
6. 11dBm + 10log(5725.00 - 5669.93) = 28.41 dBm > 24dBm.

802.11ac (VHT80)

| Chan. | Freq. (MHz) | Maximum Conducted Power (dBm) | | Total Power (mW) | Total Power (dBm) | Power Limit (dBm) | Pass / Fail |
|-------|----------------------|-------------------------------|---------|------------------|-------------------|-------------------|-------------|
| | | Chain 0 | Chain 1 | | | | |
| 58 | 5290 | 13.11 | 13.51 | 42.903 | 16.32 | 22.13 | Pass |
| 106 | 5530 | 13.28 | 13.85 | 45.547 | 16.58 | 22.42 | Pass |
| 122 | 5610 | 18.70 | 18.46 | 144.277 | 21.59 | 22.42 | Pass |
| 138 | 5690 For U-NII-2C | 16.01 | 16.30 | 82.56 | 19.17 | 22.42 | Pass |
| 138 | 5690 For U-NII-3 | 3.01 | 2.97 | 3.982 | 6.00 | 28.03 | Pass |

* U-NII-2A: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N] = 7.87\text{dBi} > 6\text{dBi}$, so the limit shall be reduced to $24-(7.87-6) = 22.13\text{dBm}$.

U-NII-2C: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N] = 7.58\text{dBi} > 6\text{dBi}$, so the limit shall be reduced to $24-(7.58-6) = 22.42\text{dBm}$.

* For U-NII-3: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N] = 7.97\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(7.97-6) = 28.03\text{dBm}$.

Note:

Chain 0

1. $11\text{dBm} + 10\log (83.19) = 30.20 > 24\text{dBm}$
2. $11\text{dBm} + 10\log (82.97) = 30.19 > 24\text{dBm}$
3. $11\text{dBm} + 10\log (144.04) = 32.58 > 24\text{dBm}$
4. $11\text{dBm} + 10\log(5725.00 - 5614.28) = 31.44 \text{ dBm} > 24\text{dBm}$.

Chain 1

1. $11\text{dBm} + 10\log (83.01) = 30.19 > 24\text{dBm}$
2. $11\text{dBm} + 10\log (83.06) = 30.19 > 24\text{dBm}$
3. $11\text{dBm} + 10\log (144.16) = 32.59 > 24\text{dBm}$
4. $11\text{dBm} + 10\log(5725.00 - 5607.43) = 31.07 \text{ dBm} > 24\text{dBm}$.

26dB BANDWIDTH:
1TX
802.11a

| Chan. | Freq. (MHz) | 26dBc Bandwidth (MHz) |
|-------|----------------------|-----------------------|
| 52 | 5260 | 40.31 |
| 60 | 5300 | 33.25 |
| 64 | 5320 | 33.38 |
| 100 | 5500 | 33.17 |
| 116 | 5580 | 45.37 |
| 140 | 5700 | 22.27 |
| 144 | 5720 For U-NII-2C | 27.58 |
| 144 | 5720 For U-NII-3 | 18.85 |

802.11n (HT20)

| Chan. | Freq. (MHz) | 26dBc Bandwidth (MHz) |
|-------|----------------------|-----------------------|
| 52 | 5260 | 45.15 |
| 60 | 5300 | 46.71 |
| 64 | 5320 | 39.08 |
| 100 | 5500 | 36.54 |
| 116 | 5580 | 48.72 |
| 140 | 5700 | 30.62 |
| 144 | 5720 For U-NII-2C | 28.90 |
| 144 | 5720 For U-NII-3 | 19.41 |

802.11n (HT40)


| Chan. | Freq. (MHz) | 26dBc Bandwidth (MHz) |
|-------|----------------------|-----------------------|
| 54 | 5270 | 99.10 |
| 62 | 5310 | 45.52 |
| 102 | 5510 | 41.38 |
| 110 | 5550 | 95.94 |
| 134 | 5670 | 85.86 |
| 142 | 5710 For U-NII-2C | 65.00 |
| 142 | 5710 For U-NII-3 | 35.00 |

802.11ac (VHT80)


| Chan. | Freq. (MHz) | 26dBc Bandwidth (MHz) |
|-------|----------------------|-----------------------|
| 58 | 5290 | 83.35 |
| 106 | 5530 | 83.14 |
| 122 | 5610 | 165.81 |
| 138 | 5690 For U-NII-2C | 131.43 |
| 138 | 5690 For U-NII-3 | 64.66 |

Spectrum Plot of Worst Value


802.11a

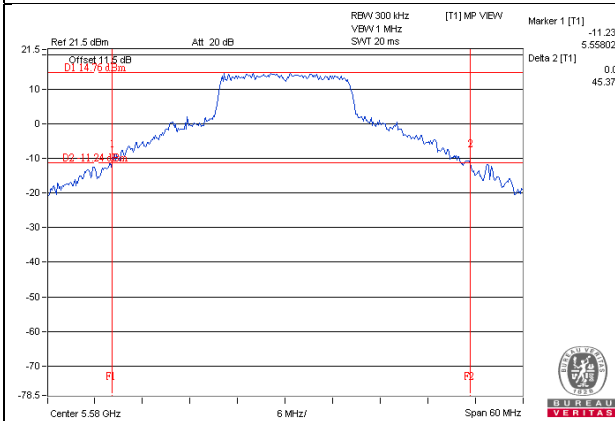


802.11n (HT20)

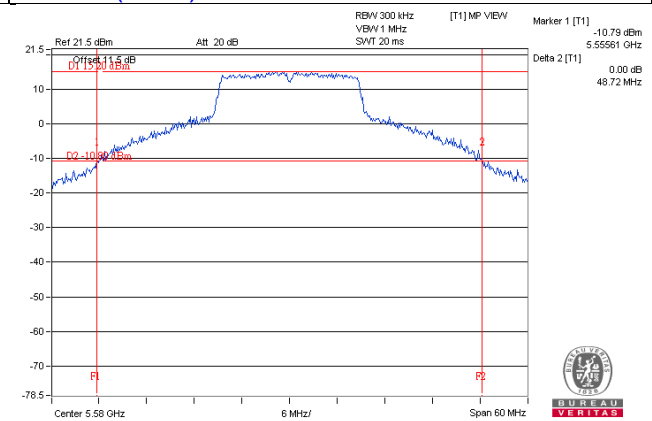

802.11n (HT40)

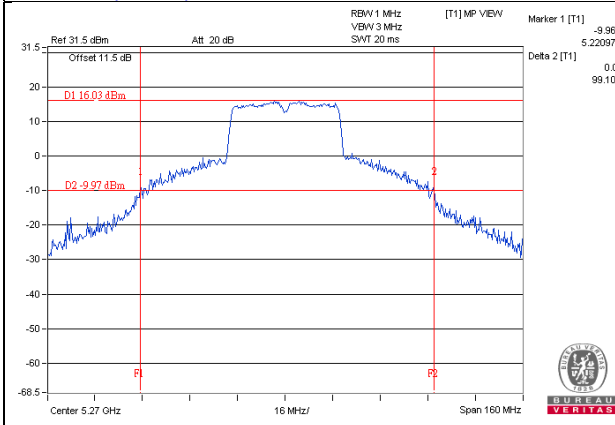

802.11ac (VHT80)

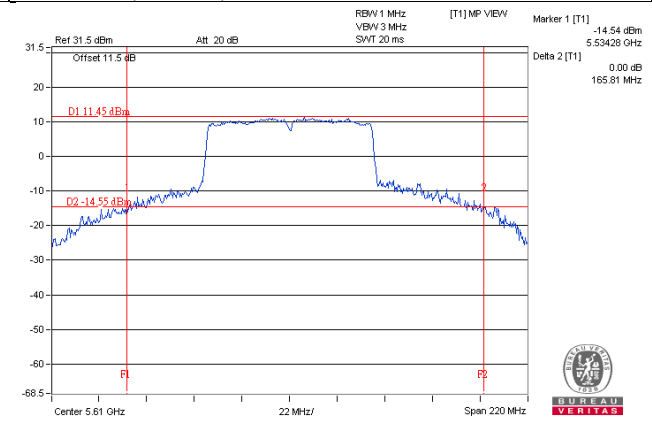

2TX

802.11a

| Chan. | Freq. (MHz) | 26dBc Bandwidth (MHz) | |
|-------|----------------------|-----------------------|---------|
| | | Chain 0 | Chain 1 |
| 52 | 5260 | 29.30 | 22.07 |
| 60 | 5300 | 23.37 | 22.86 |
| 64 | 5320 | 28.61 | 23.07 |
| 100 | 5500 | 22.17 | 21.27 |
| 116 | 5580 | 21.43 | 21.56 |
| 140 | 5700 | 21.68 | 21.82 |
| 144 | 5720 For U-NII-2C | 22.68 | 20.56 |
| 144 | 5720 For U-NII-3 | 13.19 | 12.05 |

802.11n (HT20)

| Chan. | Freq. (MHz) | 26dBc Bandwidth (MHz) | |
|-------|----------------------|-----------------------|---------|
| | | Chain 0 | Chain 1 |
| 52 | 5260 | 33.02 | 30.89 |
| 60 | 5300 | 30.75 | 29.89 |
| 64 | 5320 | 32.83 | 28.35 |
| 100 | 5500 | 31.27 | 26.10 |
| 116 | 5580 | 29.54 | 24.92 |
| 140 | 5700 | 24.19 | 22.32 |
| 144 | 5720 For U-NII-2C | 26.26 | 24.82 |
| 144 | 5720 For U-NII-3 | 15.82 | 13.85 |

802.11n (HT40)

| Chan. | Freq. (MHz) | 26dBc Bandwidth (MHz) | |
|-------|----------------------|-----------------------|---------|
| | | Chain 0 | Chain 1 |
| 54 | 5270 | 96.37 | 93.66 |
| 62 | 5310 | 42.46 | 41.12 |
| 102 | 5510 | 41.35 | 40.96 |
| 110 | 5550 | 85.58 | 86.25 |
| 134 | 5670 | 75.10 | 77.95 |
| 142 | 5710 For U-NII-2C | 52.66 | 55.07 |
| 142 | 5710 For U-NII-3 | 30.42 | 32.60 |

802.11ac (VHT80)

| Chan. | Freq. (MHz) | 26dBc Bandwidth (MHz) | |
|-------|----------------------|-----------------------|---------|
| | | Chain 0 | Chain 1 |
| 58 | 5290 | 83.19 | 83.01 |
| 106 | 5530 | 82.97 | 83.06 |
| 122 | 5610 | 144.04 | 144.16 |
| 138 | 5690 For U-NII-2C | 110.72 | 117.57 |
| 138 | 5690 For U-NII-3 | 54.48 | 55.74 |





BUREAU
VERITAS

Spectrum Plot of Worst Value



802.11a

802.11n (HT20)

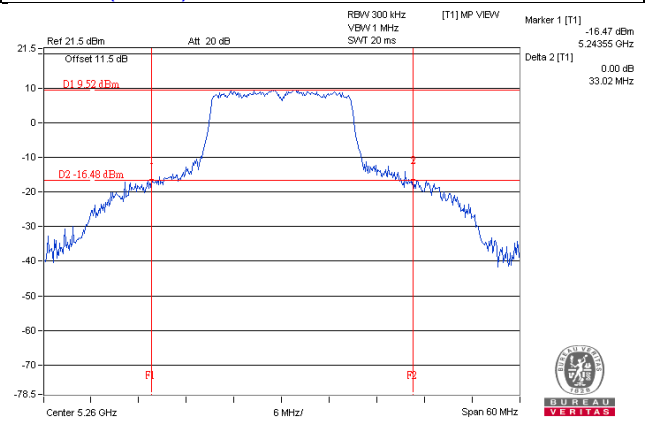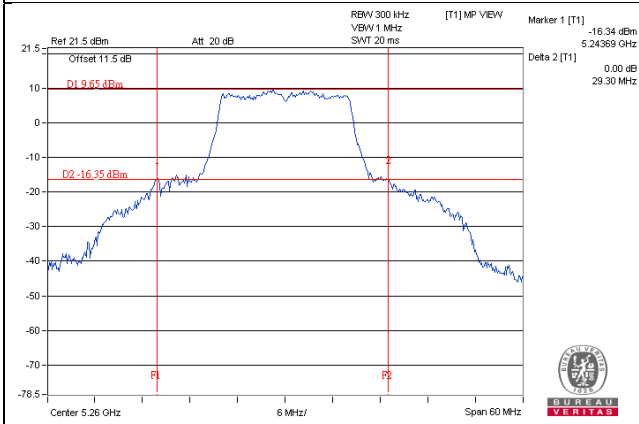


802.11n (HT40)

802.11ac (VHT80)

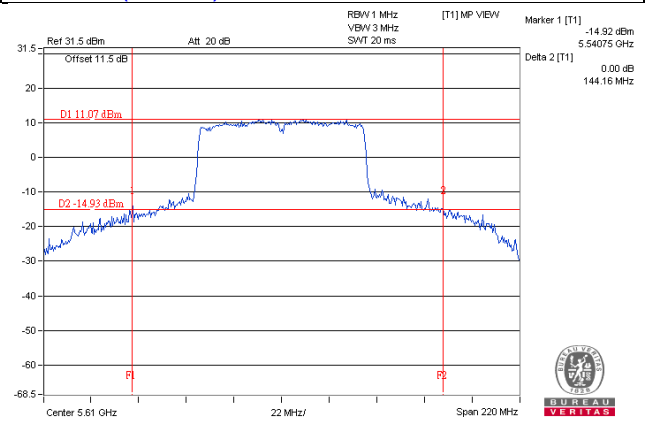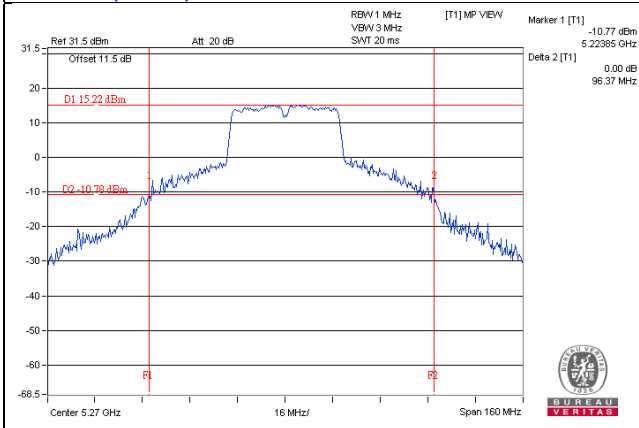

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup

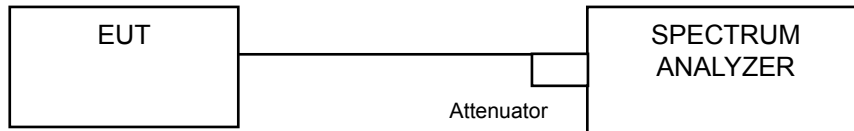

4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to SAMPLE. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.4.4 Test Results

1TX

802.11a

| Chan. | Freq. (MHz) | Occupied Bandwidth (MHz) |
|-------|----------------------|--------------------------|
| 52 | 5260 | 24.84 |
| 60 | 5300 | 17.64 |
| 64 | 5320 | 18.36 |
| 100 | 5500 | 17.64 |
| 116 | 5580 | 30.36 |
| 140 | 5700 | 17.16 |
| 144 | 5720 For U-NII-2C | 19.28 |
| 144 | 5720 For U-NII-3 | 10.00 |

802.11n (HT20)

| Chan. | Freq. (MHz) | Occupied Bandwidth (MHz) |
|-------|----------------------|--------------------------|
| 52 | 5260 | 27.12 |
| 60 | 5300 | 27.60 |
| 64 | 5320 | 18.84 |
| 100 | 5500 | 18.36 |
| 116 | 5580 | 32.88 |
| 140 | 5700 | 18.12 |
| 144 | 5720 For U-NII-2C | 20.48 |
| 144 | 5720 For U-NII-3 | 11.56 |

802.11n (HT40)


| Chan. | Freq. (MHz) | Occupied Bandwidth (MHz) |
|-------|----------------------|--------------------------|
| 54 | 5270 | 42.24 |
| 62 | 5310 | 36.84 |
| 102 | 5510 | 36.84 |
| 110 | 5550 | 38.52 |
| 134 | 5670 | 37.20 |
| 142 | 5710 For U-NII-2C | 37.32 |
| 142 | 5710 For U-NII-3 | 9.36 |

802.11ac (VHT80)


| Chan. | Freq. (MHz) | Occupied Bandwidth (MHz) |
|-------|----------------------|--------------------------|
| 58 | 5290 | 75.84 |
| 106 | 5530 | 75.84 |
| 122 | 5610 | 77.28 |
| 138 | 5690 For U-NII-2C | 73.64 |
| 138 | 5690 For U-NII-3 | 8.44 |

Spectrum Plot of Worst Value


802.11a

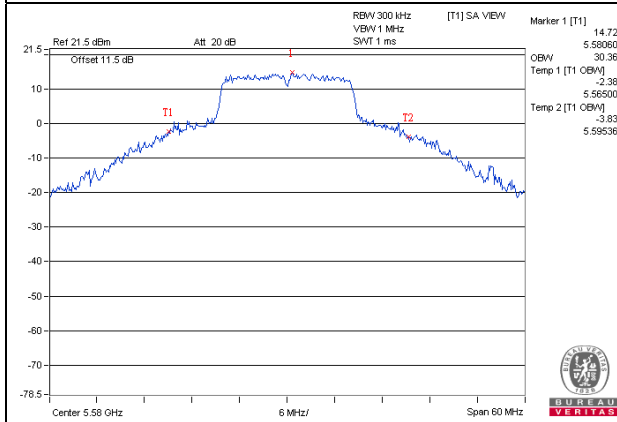


802.11n (HT20)

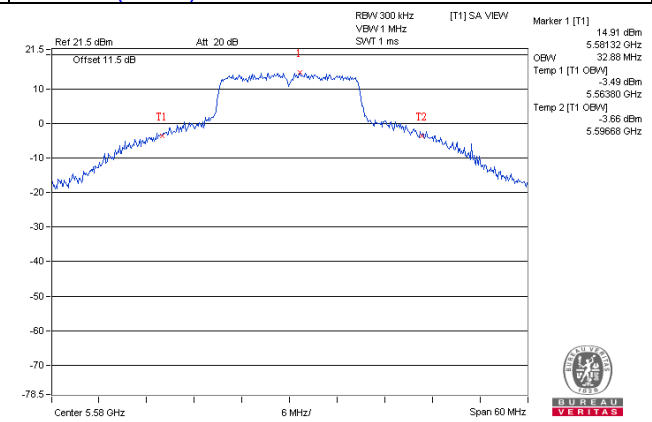

802.11n (HT40)

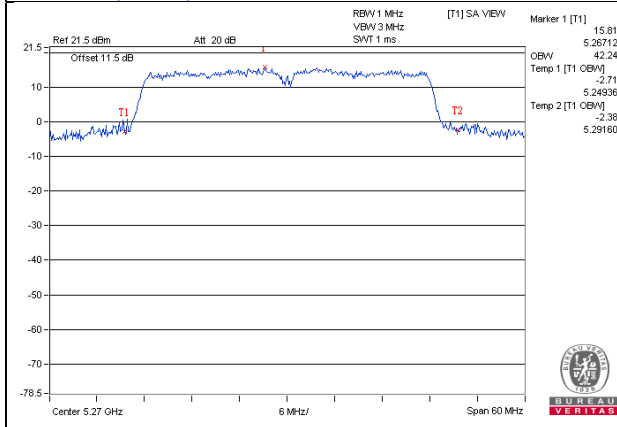

802.11ac (VHT80)

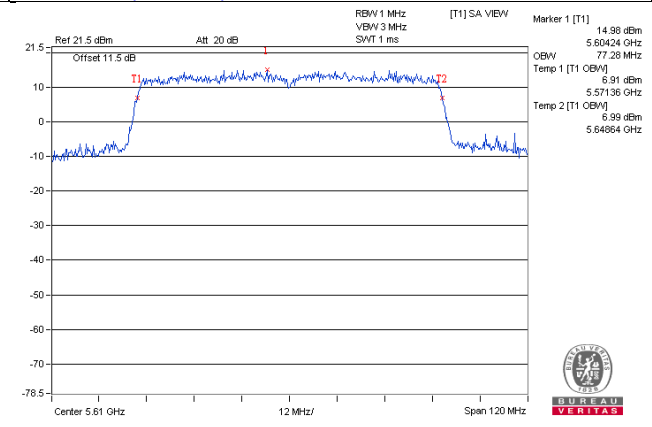

2TX

802.11a

| Chan. | Freq. (MHz) | Occupied Bandwidth (MHz) | |
|-------|----------------------|--------------------------|---------|
| | | Chain 0 | Chain 1 |
| 52 | 5260 | 17.16 | 17.04 |
| 60 | 5300 | 17.16 | 17.04 |
| 64 | 5320 | 17.16 | 16.92 |
| 100 | 5500 | 16.92 | 17.04 |
| 116 | 5580 | 16.92 | 16.92 |
| 140 | 5700 | 16.92 | 16.92 |
| 144 | 5720 For U-NII-2C | 13.52 | 13.40 |
| 144 | 5720 For U-NII-3 | 4.00 | 3.40 |

802.11n (HT20)

| Chan. | Freq. (MHz) | Occupied Bandwidth (MHz) | |
|-------|----------------------|--------------------------|---------|
| | | Chain 0 | Chain 1 |
| 52 | 5260 | 18.36 | 18.00 |
| 60 | 5300 | 18.12 | 18.12 |
| 64 | 5320 | 18.12 | 18.00 |
| 100 | 5500 | 18.12 | 17.88 |
| 116 | 5580 | 18.12 | 18.00 |
| 140 | 5700 | 18.12 | 17.88 |
| 144 | 5720 For U-NII-2C | 14.00 | 14.00 |
| 144 | 5720 For U-NII-3 | 4.24 | 4.00 |

802.11n (HT40)

| Chan. | Freq. (MHz) | Occupied Bandwidth (MHz) | |
|-------|----------------------|--------------------------|---------|
| | | Chain 0 | Chain 1 |
| 54 | 5270 | 40.08 | 37.80 |
| 62 | 5310 | 36.72 | 36.60 |
| 102 | 5510 | 36.84 | 36.60 |
| 110 | 5550 | 37.44 | 37.20 |
| 134 | 5670 | 37.20 | 36.96 |
| 142 | 5710 For U-NII-2C | 33.48 | 33.60 |
| 142 | 5710 For U-NII-3 | 3.48 | 3.48 |



802.11ac (VHT80)

| Chan. | Freq. (MHz) | Occupied Bandwidth (MHz) | |
|-------|----------------------|--------------------------|---------|
| | | Chain 0 | Chain 1 |
| 58 | 5290 | 75.84 | 75.84 |
| 106 | 5530 | 75.84 | 75.84 |
| 122 | 5610 | 76.80 | 76.80 |
| 138 | 5690 For U-NII-2C | 73.16 | 73.64 |
| 138 | 5690 For U-NII-3 | 3.40 | 3.40 |

Spectrum Plot of Worst Value



802.11a

802.11n (HT20)

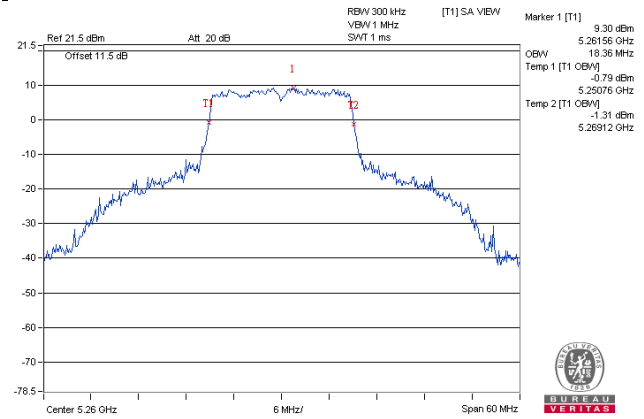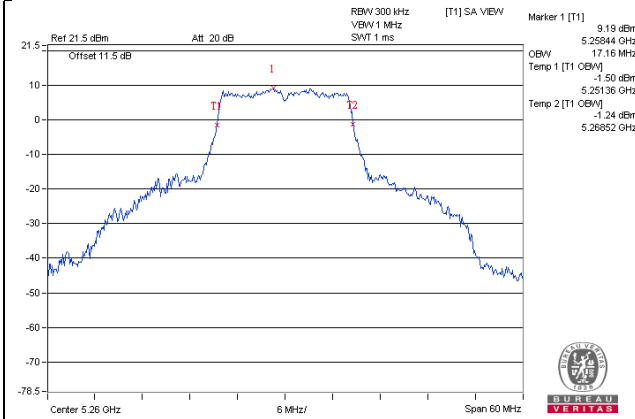

802.11n (HT40)

802.11ac (VHT80)

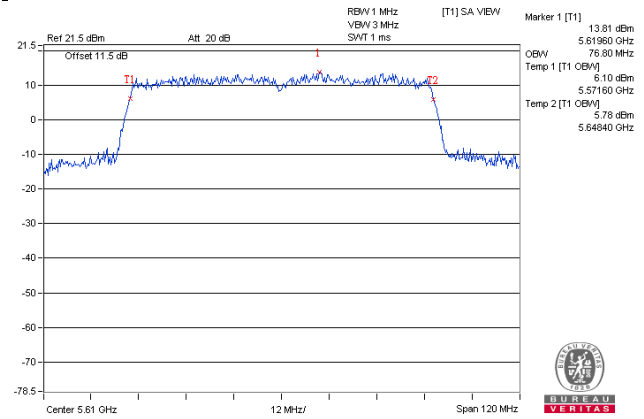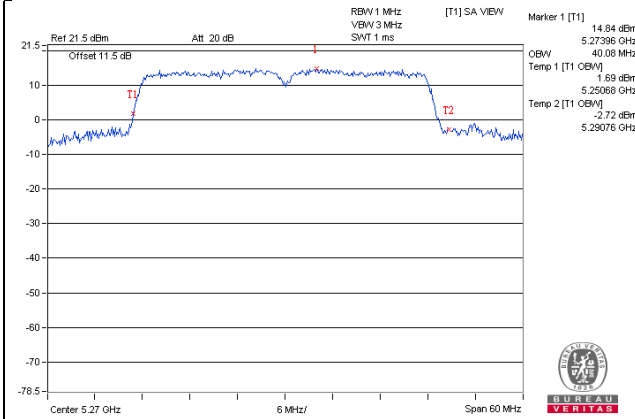

EUT MAXIMUM CONDUCTED POWER

CDD Mode: 1TX

802.11a

| Frequency Band (MHz) | Max. Power | |
|----------------------|-------------------|--------------------|
| | Output Power (mW) | Output Power (dBm) |
| 5250~5350 | 129.420 | 21.12 |
| 5470~5725 | 212.324 | 23.27 |

Note: Manufacturer provides Transmit Power Control description to meet this requirement.

802.11n (HT20)

| Frequency Band (MHz) | Max. Power | |
|----------------------|-------------------|--------------------|
| | Output Power (mW) | Output Power (dBm) |
| 5250~5350 | 154.170 | 21.88 |
| 5470~5725 | 221.820 | 23.46 |

Note: Manufacturer provides Transmit Power Control description to meet this requirement.

802.11n (HT40)

| Frequency Band (MHz) | Max. Power | |
|----------------------|-------------------|--------------------|
| | Output Power (mW) | Output Power (dBm) |
| 5250~5350 | 143.219 | 21.56 |
| 5470~5725 | 117.490 | 20.70 |

Note: Manufacturer provides Transmit Power Control description to meet this requirement.

802.11ac (VHT80)

| Frequency Band (MHz) | Max. Power | |
|----------------------|-------------------|--------------------|
| | Output Power (mW) | Output Power (dBm) |
| 5250~5350 | 28.184 | 14.50 |
| 5470~5725 | 114.288 | 20.58 |

Note: Manufacturer provides Transmit Power Control description to meet this requirement.

CDD Mode: 2TX

802.11a

| Frequency Band (MHz) | Max. Power | |
|----------------------|-------------------|--------------------|
| | Output Power (mW) | Output Power (dBm) |
| 5250~5350 | 132.596 | 21.23 |
| 5470~5725 | 141.437 | 21.51 |

Note: Manufacturer provides Transmit Power Control description to meet this requirement.

802.11n (HT20)

| Frequency Band (MHz) | Max. Power | |
|----------------------|-------------------|--------------------|
| | Output Power (mW) | Output Power (dBm) |
| 5250~5350 | 149.467 | 21.75 |
| 5470~5725 | 156.509 | 21.95 |

Note: Manufacturer provides Transmit Power Control description to meet this requirement.

802.11n (HT40)

| Frequency Band (MHz) | Max. Power | |
|----------------------|-------------------|--------------------|
| | Output Power (mW) | Output Power (dBm) |
| 5250~5350 | 241.298 | 23.83 |
| 5470~5725 | 206.552 | 23.15 |

Note: Manufacturer provides Transmit Power Control description to meet this requirement.

802.11ac (VHT80)

| Frequency Band (MHz) | Max. Power | |
|----------------------|-------------------|--------------------|
| | Output Power (mW) | Output Power (dBm) |
| 5250~5350 | 50.766 | 17.06 |
| 5470~5725 | 173.207 | 22.39 |

Note: Manufacturer provides Transmit Power Control description to meet this requirement.

Beamforming Mode

802.11ac (VHT20)

| Frequency Band (MHz) | Max. Power | |
|----------------------|-------------------|--------------------|
| | Output Power (mW) | Output Power (dBm) |
| 5250~5350 | 149.467 | 21.75 |
| 5470~5725 | 156.509 | 21.95 |

Note: Manufacturer provides Transmit Power Control description to meet this requirement.

802.11ac (VHT40)

| Frequency Band (MHz) | Max. Power | |
|----------------------|-------------------|--------------------|
| | Output Power (mW) | Output Power (dBm) |
| 5250~5350 | 150.236 | 21.77 |
| 5470~5725 | 150.739 | 21.78 |

Note: Manufacturer provides Transmit Power Control description to meet this requirement.

802.11ac (VHT80)

| Frequency Band (MHz) | Max. Power | |
|----------------------|-------------------|--------------------|
| | Output Power (mW) | Output Power (dBm) |
| 5250~5350 | 42.903 | 16.32 |
| 5470~5725 | 144.277 | 21.59 |


Note: Manufacturer provides Transmit Power Control description to meet this requirement.

4.5 Peak Power Spectral Density Measurement

4.5.1 Limits of Peak Power Spectral Density Measurement

| Operation Band | EUT Category | | LIMIT |
|----------------|--------------|---|---------------|
| U-NII-1 | - | Outdoor Wi-Fi & BLE Array AP | 17dBm/ MHz |
| | - | Fixed point-to-point Wi-Fi & BLE Array AP | |
| | - | Indoor Wi-Fi & BLE Array AP | 11dBm/ MHz |
| | - | Mobile and Portable client device | |
| U-NII-2A | √ | | 11dBm/ MHz |
| U-NII-2C | √ | | 11dBm/ MHz |
| U-NII-3 | √ | | 30dBm/ 500kHz |

4.5.2 Test Setup

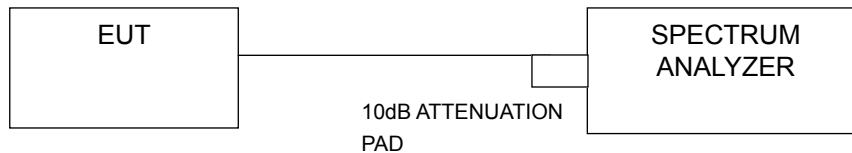

4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedures

For U-NII-2A, U-NII-2C band:

Duty cycle of test signal is $\geq 98\%$

Using method SA-1

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1MHz, Set VBW ≥ 3 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value

Duty cycle of test signal is $< 98\%$

Using method SA-2

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1MHz, Set VBW ≥ 3 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value and add $10 \log (1/\text{duty cycle})$

For U-NII-3 band:

Duty cycle of test signal is $\geq 98\%$

Using method SA-1

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 300 kHz, Set VBW ≥ 1 MHz, Detector = RMS.
- 3) Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
- 4) Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500 \text{ kHz} / 300 \text{ kHz})$.
- 5) Sweep time = auto, trigger set to "free run".
- 6) Trace average at least 100 traces in power averaging mode.
- 7) Record the max value.

Duty cycle of test signal is $< 98\%$

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.

- 2) Set RBW = 300 kHz, Set VBW ≥ 1 MHz, Detector = RMS

- 3) Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.

- 4) Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500 \text{ kHz}/300\text{kHz})$

- 5) Sweep time = auto, trigger set to "free run".

- 6) Trace average at least 100 traces in power averaging mode.

- 7) Record the max value and add $10 \log (1/\text{duty cycle})$

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Conditions

Same as Item 4.3.6.

4.5.7 Test Results

For U-NII-2A, U-NII-2C band:

1TX

802.11a

| Chan. | Freq. (MHz) | PSD (dBm/MHz) | Max. Limit (dBm/MHz) | Pass / Fail |
|-------|----------------------|---------------|----------------------|-------------|
| 52 | 5260 | 8.49 | 11.00 | Pass |
| 60 | 5300 | 6.51 | 11.00 | Pass |
| 64 | 5320 | 7.14 | 11.00 | Pass |
| 100 | 5500 | 7.33 | 11.00 | Pass |
| 116 | 5580 | 10.69 | 11.00 | Pass |
| 140 | 5700 | 6.06 | 11.00 | Pass |
| 144 | 5720 For U-NII-2C | 8.44 | 11.00 | Pass |

802.11n (HT20)

| Chan. | Freq. (MHz) | PSD W/O Duty Factor (dBm/MHz) | Duty Factor (dB) | PSD With Duty Factor (dBm/MHz) | Max. Limit (dBm/MHz) | Pass / Fail |
|-------|----------------------|-------------------------------|------------------|--------------------------------|----------------------|-------------|
| 52 | 5260 | 8.58 | 0.09 | 8.67 | 11.00 | Pass |
| 60 | 5300 | 8.75 | 0.09 | 8.84 | 11.00 | Pass |
| 64 | 5320 | 6.76 | 0.09 | 6.85 | 11.00 | Pass |
| 100 | 5500 | 6.62 | 0.09 | 6.71 | 11.00 | Pass |
| 116 | 5580 | 10.59 | 0.09 | 10.68 | 11.00 | Pass |
| 140 | 5700 | 5.78 | 0.09 | 5.87 | 11.00 | Pass |
| 144 | 5720 For U-NII-2C | 8.18 | 0.09 | 8.27 | 11.00 | Pass |

802.11n (HT40)


| Chan. | Freq. (MHz) | PSD W/O Duty Factor (dBm/MHz) | Duty Factor (dB) | PSD With Duty Factor (dBm/MHz) | Max. Limit (dBm/MHz) | Pass / Fail |
|-------|----------------------|-------------------------------|------------------|--------------------------------|----------------------|-------------|
| 54 | 5270 | 5.47 | 0.10 | 5.57 | 11.00 | Pass |
| 62 | 5310 | -0.20 | 0.10 | -0.10 | 11.00 | Pass |
| 102 | 5510 | -0.37 | 0.10 | -0.27 | 11.00 | Pass |
| 110 | 5550 | 5.71 | 0.10 | 5.81 | 11.00 | Pass |
| 134 | 5670 | 4.20 | 0.10 | 4.30 | 11.00 | Pass |
| 142 | 5710 For U-NII-2C | 4.67 | 0.10 | 4.77 | 11.00 | Pass |

802.11ac (VHT80)


| Chan. | Freq. (MHz) | PSD W/O Duty Factor (dBm/MHz) | Duty Factor (dB) | PSD With Duty Factor (dBm/MHz) | Max. Limit (dBm/MHz) | Pass / Fail |
|-------|----------------------|-------------------------------|------------------|--------------------------------|----------------------|-------------|
| 58 | 5290 | -3.88 | 0.35 | -3.53 | 11.00 | Pass |
| 106 | 5530 | -4.04 | 0.35 | -3.69 | 11.00 | Pass |
| 122 | 5610 | 0.79 | 0.35 | 1.14 | 11.00 | Pass |
| 138 | 5690 For U-NII-2C | 0.27 | 0.35 | 0.62 | 11.00 | Pass |

Spectrum Plot of Worst Value


802.11a / Ch 116

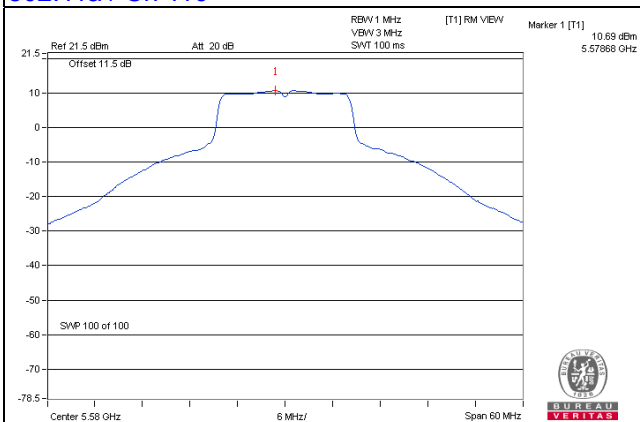


802.11n (HT20) / Ch 116

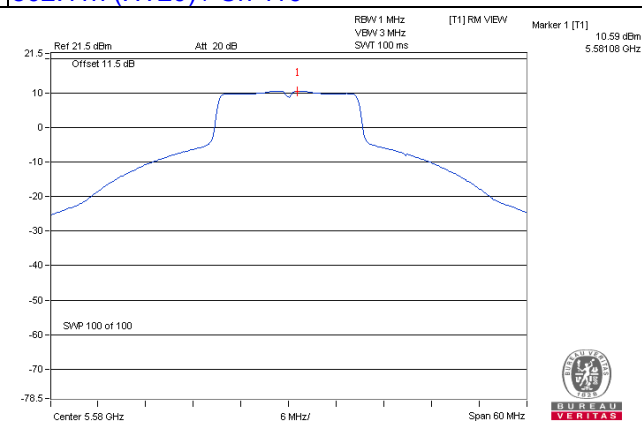

802.11n (HT40) / Ch 110

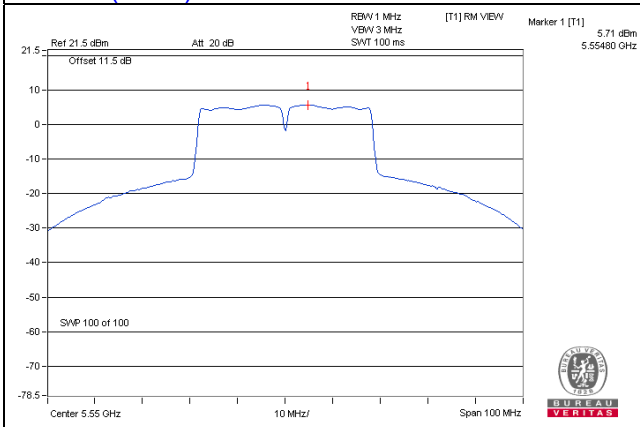

802.11ac (VHT80) / Ch 122

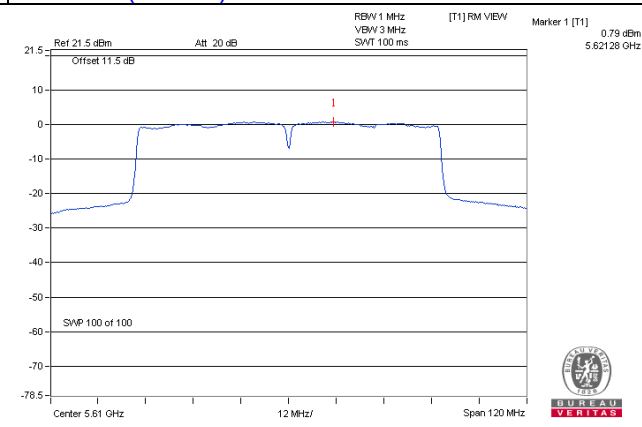

2TX

802.11a

| Chan. | Freq. (MHz) | PSD (dBm/MHz) | | Total PSD (dBm/MHz) | Max. Limit (dBm/MHz) | Pass / Fail |
|-------|-------------------------|---------------|---------|---------------------|----------------------|-------------|
| | | Chain 0 | Chain 1 | | | |
| 52 | 5260 | 5.71 | 5.62 | 8.68 | 9.13 | Pass |
| 60 | 5300 | 5.67 | 5.55 | 8.62 | 9.13 | Pass |
| 64 | 5320 | 5.94 | 5.81 | 8.89 | 9.13 | Pass |
| 100 | 5500 | 5.73 | 5.69 | 8.72 | 9.42 | Pass |
| 116 | 5580 | 6.02 | 5.58 | 8.82 | 9.42 | Pass |
| 140 | 5700 | 5.98 | 5.52 | 8.77 | 9.42 | Pass |
| 144 | 5720 For U-NII-2C | 5.81 | 6.77 | 9.33 | 9.42 | Pass |

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- U-NII-2A: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 7.87dBi > 6dBi, so the limit shall be reduced to 11-(7.87-6) = 9.13dBm.
U-NII-2C: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 7.58dBi > 6dBi, so the limit shall be reduced to 11-(7.58-6) = 9.42dBm.

802.11n (HT20)

| Chan. | Freq. (MHz) | PSD (dBm/MHz) | | Total PSD (dBm/MHz) | Max. Limit (dBm/MHz) | Pass / Fail |
|-------|-------------------------|---------------|---------|---------------------|----------------------|-------------|
| | | Chain 0 | Chain 1 | | | |
| 52 | 5260 | 5.79 | 5.66 | 8.74 | 9.13 | Pass |
| 60 | 5300 | 5.85 | 5.53 | 8.70 | 9.13 | Pass |
| 64 | 5320 | 5.76 | 5.62 | 8.70 | 9.13 | Pass |
| 100 | 5500 | 5.66 | 5.22 | 8.46 | 9.42 | Pass |
| 116 | 5580 | 5.92 | 5.87 | 8.91 | 9.42 | Pass |
| 140 | 5700 | 4.69 | 4.56 | 7.64 | 9.42 | Pass |
| 144 | 5720 For U-NII-2C | 5.89 | 5.87 | 8.89 | 9.42 | Pass |

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- U-NII-2A: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 7.87dBi > 6dBi, so the limit shall be reduced to 11-(7.87-6) = 9.13dBm.
U-NII-2C: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 7.58dBi > 6dBi, so the limit shall be reduced to 11-(7.58-6) = 9.42dBm.

802.11n (HT40)

| Chan. | Freq. (MHz) | PSD W/O Duty Factor (dBm/MHz) | | Duty Factor (dB) | Total PSD With Duty Factor (dBm/MHz) | Max. Limit (dBm/MHz) | Pass / Fail |
|-------|----------------------|-------------------------------|---------|------------------|--------------------------------------|----------------------|-------------|
| | | Chain 0 | Chain 1 | | | | |
| 54 | 5270 | 5.13 | 4.91 | 0.13 | 8.16 | 9.13 | Pass |
| 62 | 5310 | -0.40 | -0.53 | 0.13 | 2.67 | 9.13 | Pass |
| 102 | 5510 | -0.96 | -1.70 | 0.13 | 1.82 | 9.42 | Pass |
| 110 | 5550 | 4.73 | 4.23 | 0.13 | 7.63 | 9.42 | Pass |
| 134 | 5670 | 3.51 | 3.07 | 0.13 | 6.43 | 9.42 | Pass |
| 142 | 5710 For U-NII-2C | 2.11 | 3.00 | 0.13 | 5.72 | 9.42 | Pass |

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- U-NII-2A: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 7.87dBi > 6dBi, so the limit shall be reduced to $11-(7.87-6) = 9.13\text{dBm}$.
 U-NII-2C: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 7.58dBi > 6dBi, so the limit shall be reduced to $11-(7.58-6) = 9.42\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)

| Chan. | Freq. (MHz) | PSD W/O Duty Factor (dBm/MHz) | | Duty Factor (dB) | Total PSD With Duty Factor (dBm/MHz) | Max. Limit (dBm/MHz) | Pass / Fail |
|-------|----------------------|-------------------------------|---------|------------------|--------------------------------------|----------------------|-------------|
| | | Chain 0 | Chain 1 | | | | |
| 58 | 5290 | -4.52 | -4.79 | 0.28 | -1.36 | 9.13 | Pass |
| 106 | 5530 | -4.73 | -5.35 | 0.28 | -1.74 | 9.42 | Pass |
| 122 | 5610 | -0.43 | -0.25 | 0.28 | 2.95 | 9.42 | Pass |
| 138 | 5690 For U-NII-2C | -0.99 | 0.11 | 0.28 | 2.89 | 9.42 | Pass |



Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- U-NII-2A: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 7.87dBi > 6dBi, so the limit shall be reduced to $11-(7.87-6) = 9.13\text{dBm}$.
 U-NII-2C: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 7.58dBi > 6dBi, so the limit shall be reduced to $11-(7.58-6) = 9.42\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value



802.11a / Chain 0 / Ch 116

802.11n (HT20) / Chain 0 / Ch 116

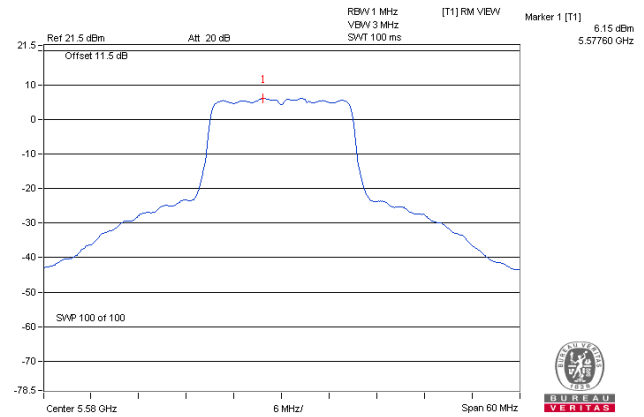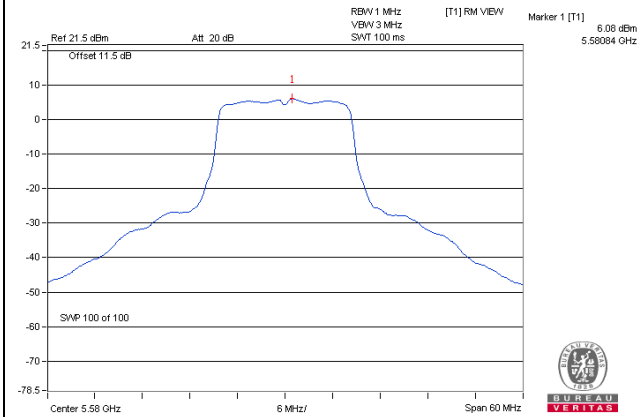

802.11n (HT40) / Chain 0 / Ch 54

802.11ac (VHT80) / Chain 1 / Ch 138

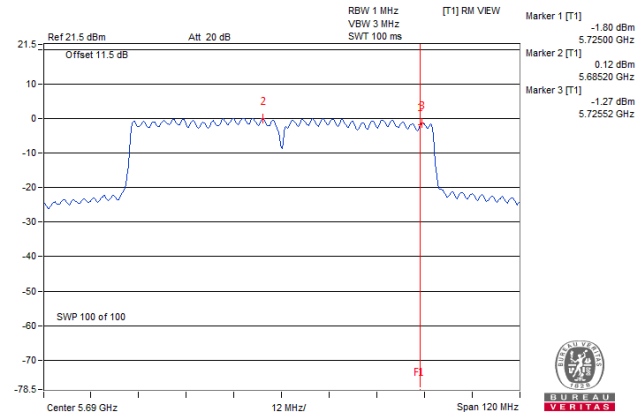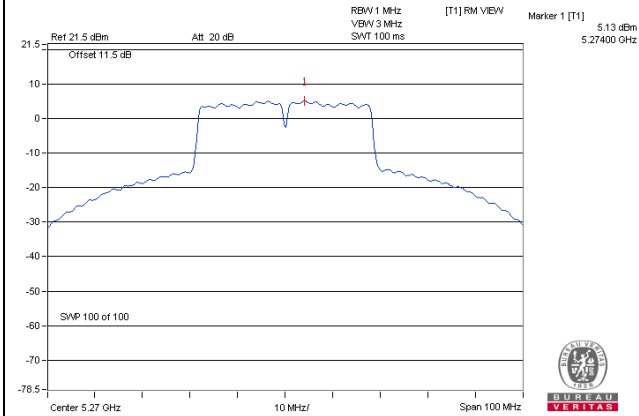

For U-NII-3 band:

1TX

802.11a

| Chan. | Freq. (MHz) | PSD | | Limit (dBm/500kHz) | Pass / Fail |
|-------|---------------------|--------------|--------------|-----------------------|-------------|
| | | (dBm/300kHz) | (dBm/500kHz) | | |
| 144 | 5720 For U-NII-3 | -0.38 | 1.84 | 30.00 | Pass |

802.11n (HT20)

| Chan. | Freq. (MHz) | PSD | | Limit (dBm/500kHz) | Pass / Fail |
|-------|---------------------|--------------|--------------|-----------------------|-------------|
| | | (dBm/300kHz) | (dBm/500kHz) | | |
| 144 | 5720 For U-NII-3 | -0.34 | 1.88 | 30.00 | Pass |

802.11n (HT40)

| Chan. | Freq. (MHz) | PSD | | Duty factor | Total PSD (dBm /500kHz) | Limit (dBm /500kHz) | Pass / Fail |
|-------|---------------------|--------------|--------------|----------------|-------------------------------|------------------------|-------------|
| | | (dBm/300kHz) | (dBm/500kHz) | | | | |
| 142 | 5710 For U-NII-3 | -4.31 | -2.09 | 0.10 | -1.99 | 30.00 | Pass |

802.11ac (VHT80)


| Chan. | Freq. (MHz) | PSD | | Duty factor | Total PSD (dBm /500kHz) | Limit (dBm /500kHz) | Pass / Fail |
|-------|---------------------|--------------|--------------|----------------|-------------------------------|------------------------|-------------|
| | | (dBm/300kHz) | (dBm/500kHz) | | | | |
| 138 | 5690 For U-NII-3 | -9.28 | -7.06 | 0.35 | -6.71 | 30.00 | Pass |




BUREAU
VERITAS

Spectrum Plot of Worst Value


802.11a

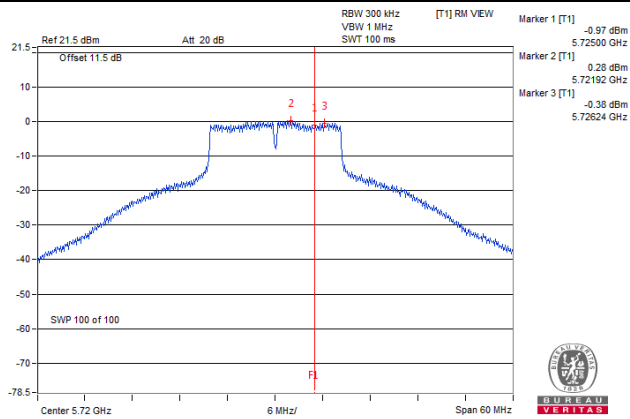


802.11n (HT20)

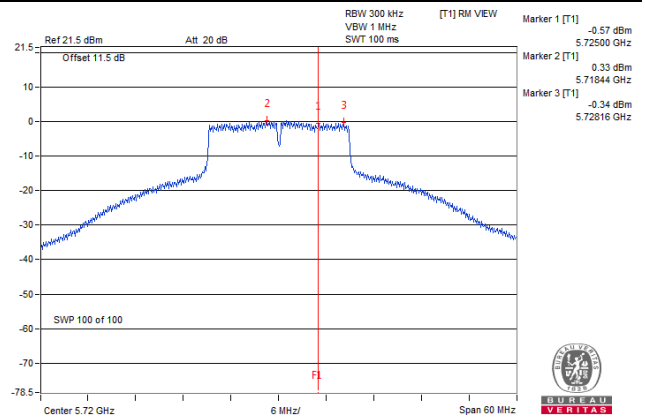

802.11n (HT40)

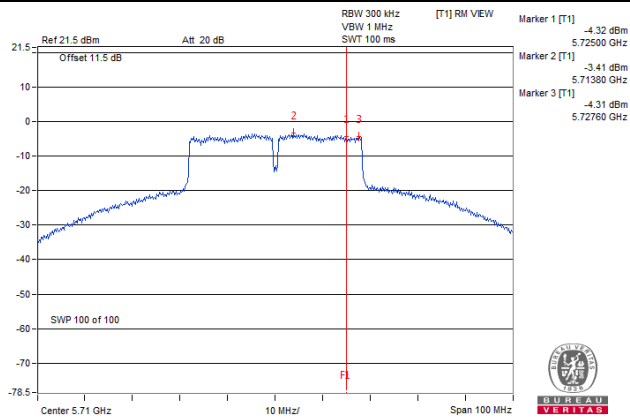

802.11ac (VHT80)

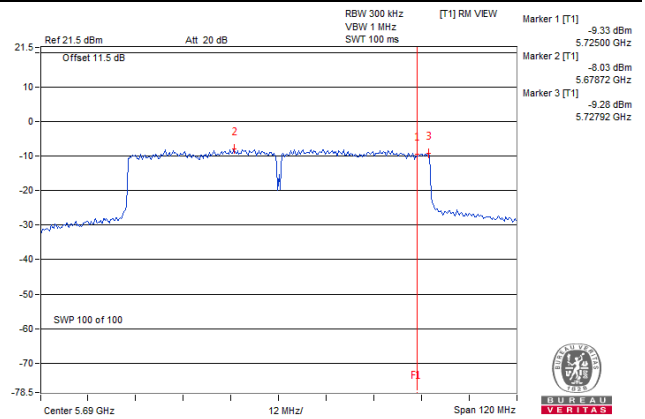

2TX

802.11a

| TX chain | Chan. | Freq. (MHz) | PSD w/o Duty Factor | | 10 log (N=2) dB | Total PSD (dBm/500kHz) | Limit (dBm/500kHz) | Pass / Fail |
|----------|-------|---------------------|---------------------|--------------|-----------------|------------------------|--------------------|-------------|
| | | | (dBm/300kHz) | (dBm/500kHz) | | | | |
| 0 | 144 | 5720 For U-NII-3 | -2.33 | -0.11 | 3.01 | 2.90 | 28.03 | Pass |
| 1 | 144 | 5720 For U-NII-3 | -1.73 | 0.49 | 3.01 | 3.50 | 28.03 | Pass |

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 7.97dBi > 6dBi, so the power limit shall be reduced to $30-(7.97-6) = 28.03\text{dBm}$.

802.11n (HT20)

| TX chain | Chan. | Freq. (MHz) | PSD w/o Duty Factor | | 10 log (N=2) dB | Total PSD (dBm/500kHz) | Limit (dBm/500kHz) | Pass / Fail |
|----------|-------|---------------------|---------------------|--------------|-----------------|------------------------|--------------------|-------------|
| | | | (dBm/300kHz) | (dBm/500kHz) | | | | |
| 0 | 144 | 5720 For U-NII-3 | -3.04 | -0.82 | 3.01 | 2.19 | 28.03 | Pass |
| 1 | 144 | 5720 For U-NII-3 | -2.16 | 0.06 | 3.01 | 3.07 | 28.03 | Pass |

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 7.97dBi > 6dBi, so the power limit shall be reduced to $30-(7.97-6) = 28.03\text{dBm}$.

802.11n (HT40)

| TX chain | Chan. | Freq. (MHz) | PSD w/o Duty Factor | | 10 log (N=2) dB | Duty Factor (dB) | Total PSD with Duty Factor (dBm/500kHz) | Limit (dBm/500kHz) | Pass / Fail |
|----------|-------|---------------------|---------------------|--------------|-----------------|------------------|---|--------------------|-------------|
| | | | (dBm/300kHz) | (dBm/500kHz) | | | | | |
| 0 | 142 | 5710 For U-NII-3 | -6.55 | -4.33 | 3.01 | 0.13 | -1.19 | 28.03 | Pass |
| 1 | 142 | 5710 For U-NII-3 | -6.08 | -3.86 | 3.01 | 0.13 | -0.72 | 28.03 | Pass |

Note:


- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ = 7.97dBi > 6dBi, so the power limit shall be reduced to $30-(7.97-6) = 28.03\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)

| TX chain | Chan. | Freq. (MHz) | PSD w/o Duty Factor | | 10 log (N=2) dB | Duty Factor (dB) | Total PSD with Duty Factor (dBm/500kHz) | Limit (dBm/500kHz) | Pass / Fail |
|----------|-------|---------------------|---------------------|--------------|-----------------|------------------|---|--------------------|-------------|
| | | | (dBm/300kHz) | (dBm/500kHz) | | | | | |
| 0 | 138 | 5690 For U-NII-3 | -9.80 | -7.58 | 3.01 | 0.28 | -4.29 | 28.03 | Pass |
| 1 | 138 | 5690 For U-NII-3 | -9.52 | -7.30 | 3.01 | 0.28 | -4.01 | 28.03 | Pass |

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N] = 7.97\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(7.97-6) = 28.03\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

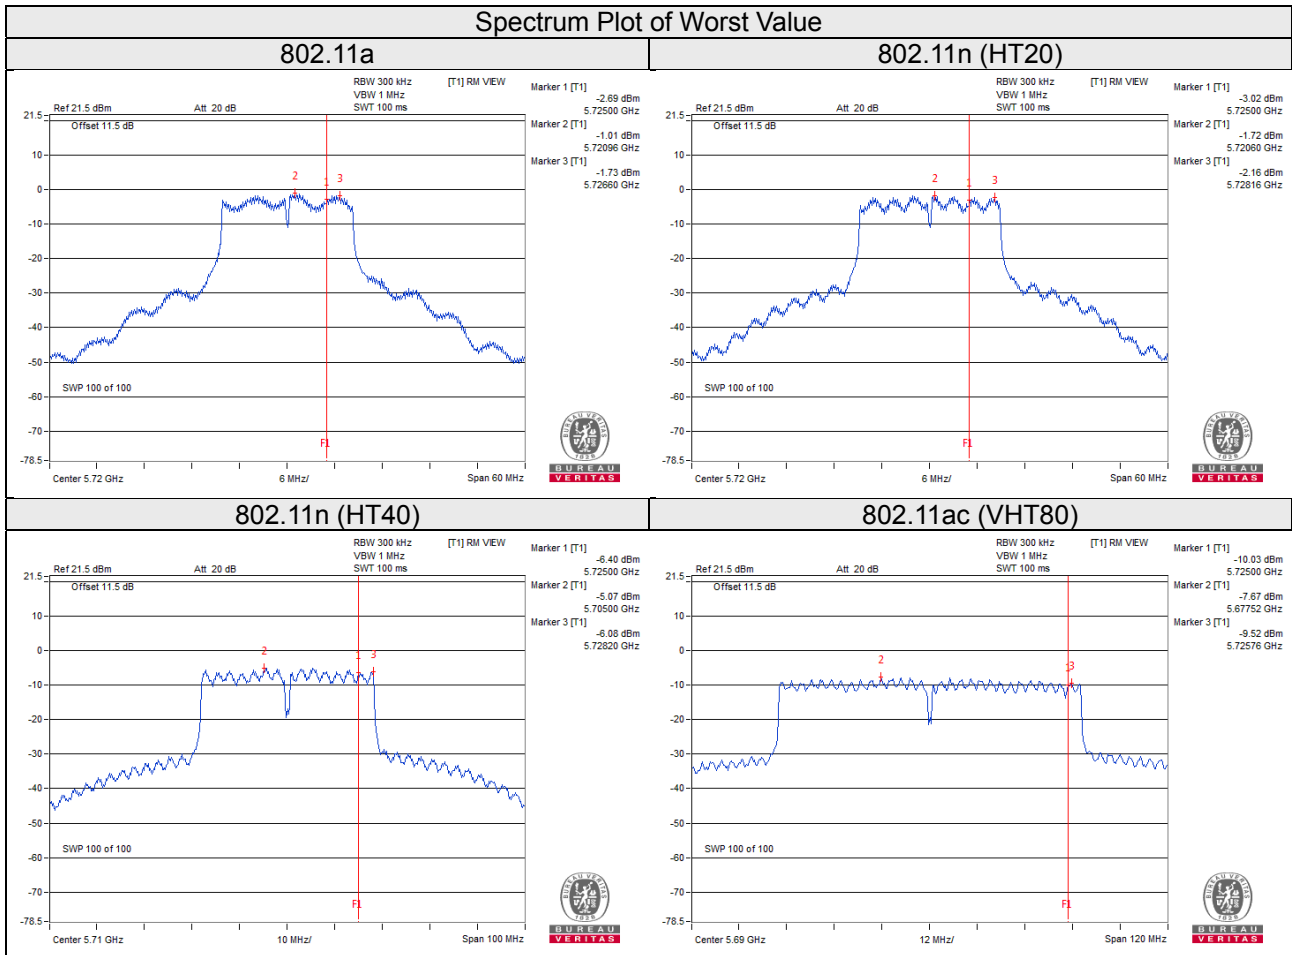


4.6 Frequency Stability

4.6.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 Test Setup

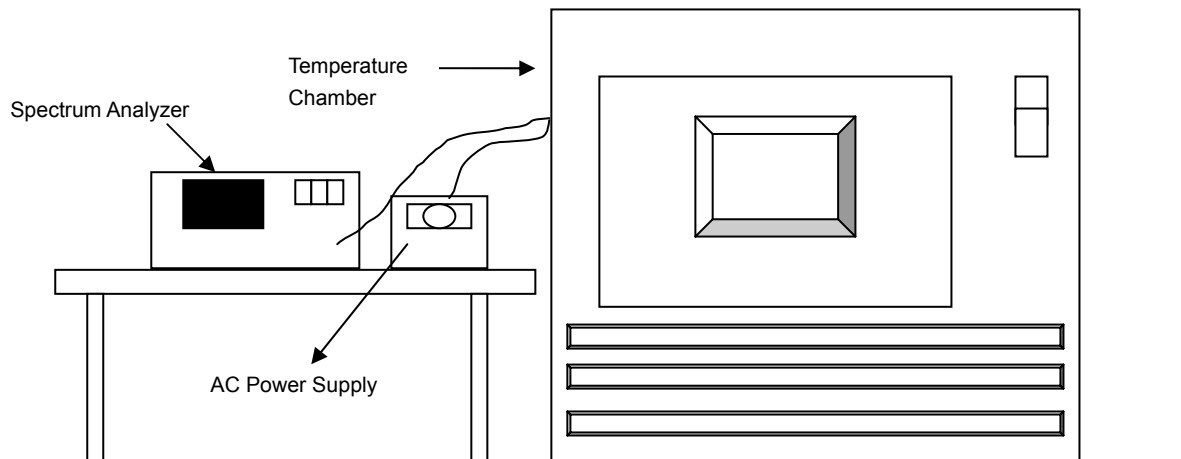

4.6.3 Test Instruments

Tested date: May 25, 2017

| Description & Manufacturer | Model No. | Serial No. | Cal. Date | Cal. Due |
|---|-----------|------------|---------------|---------------|
| Spectrum Analyzer ROHDE & SCHWARZ | FSP40 | 100040 | Aug. 16, 2016 | Aug. 15, 2017 |
| WIT Standard Temperature And Humidity Chamber | TH-4S-C | W981030 | Jun. 08, 2016 | Jun. 07, 2017 |
| Digital Multimeter Fluke | 87-III | 70360742 | Jul. 01, 2016 | Jun. 30, 2017 |
| AC Power Supply Extech | CFW-105 | E000603 | NA | NA |

4.6.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.6.7 Test Results

1TX

| Frequency Stability Versus Temp. | | | | | | | | | |
|----------------------------------|--------------------|--------------------------|---------------------|--------------------------|---------------------|--------------------------|---------------------|--------------------------|---------------------|
| Operating Frequency: 5260MHz | | | | | | | | | |
| Temp. (°C) | Power Supply (Vac) | 0 Minute | | 2 Minute | | 5 Minute | | 10 Minute | |
| | | Measured Frequency (MHz) | Frequency Drift (%) | Measured Frequency (MHz) | Frequency Drift (%) | Measured Frequency (MHz) | Frequency Drift (%) | Measured Frequency (MHz) | Frequency Drift (%) |
| 50 | 120 | 5259.9911 | -0.00017 | 5259.9932 | -0.00013 | 5259.9949 | -0.00010 | 5259.9903 | -0.00018 |
| 40 | 120 | 5259.9938 | -0.00012 | 5259.9921 | -0.00015 | 5259.993 | -0.00013 | 5259.9918 | -0.00016 |
| 30 | 120 | 5259.985 | -0.00029 | 5259.9861 | -0.00026 | 5259.9853 | -0.00028 | 5259.9866 | -0.00025 |
| 20 | 120 | 5260.0055 | 0.00010 | 5260.0048 | 0.00009 | 5260.0061 | 0.00012 | 5260.0063 | 0.00012 |
| 10 | 120 | 5260.0161 | 0.00031 | 5260.0155 | 0.00029 | 5260.0125 | 0.00024 | 5260.0131 | 0.00025 |
| 0 | 120 | 5260.0064 | 0.00012 | 5260.008 | 0.00015 | 5260.0065 | 0.00012 | 5260.0061 | 0.00012 |
| -10 | 120 | 5259.9927 | -0.00014 | 5259.9934 | -0.00013 | 5259.9908 | -0.00017 | 5259.9909 | -0.00017 |
| -20 | 120 | 5259.9842 | -0.00030 | 5259.9847 | -0.00029 | 5259.9862 | -0.00026 | 5259.9856 | -0.00027 |
| -30 | 120 | 5259.9957 | -0.00008 | 5259.9953 | -0.00009 | 5259.9967 | -0.00006 | 5259.9953 | -0.00009 |

| Frequency Stability Versus Voltage | | | | | | | | | |
|------------------------------------|--------------------|--------------------------|---------------------|--------------------------|---------------------|--------------------------|---------------------|--------------------------|---------------------|
| Operating Frequency: 5260MHz | | | | | | | | | |
| Temp. (°C) | Power Supply (Vac) | 0 Minute | | 2 Minute | | 5 Minute | | 10 Minute | |
| | | Measured Frequency (MHz) | Frequency Drift (%) | Measured Frequency (MHz) | Frequency Drift (%) | Measured Frequency (MHz) | Frequency Drift (%) | Measured Frequency (MHz) | Frequency Drift (%) |
| 20 | 138 | 5260.0048 | 0.00009 | 5260.0048 | 0.00009 | 5260.0064 | 0.00012 | 5260.0063 | 0.00012 |
| | 120 | 5260.0055 | 0.00010 | 5260.0048 | 0.00009 | 5260.0061 | 0.00012 | 5260.0063 | 0.00012 |
| | 102 | 5260.0059 | 0.00011 | 5260.0051 | 0.00010 | 5260.0061 | 0.00012 | 5260.0067 | 0.00013 |

2TX

Frequency Stability Versus Temp.

Operating Frequency: 5260MHz

| Temp. (°C) | Power Supply (Vac) | 0 Minute | | 2 Minute | | 5 Minute | | 10 Minute | |
|------------|--------------------|--------------------------|---------------------|--------------------------|---------------------|--------------------------|---------------------|--------------------------|---------------------|
| | | Measured Frequency (MHz) | Frequency Drift (%) | Measured Frequency (MHz) | Frequency Drift (%) | Measured Frequency (MHz) | Frequency Drift (%) | Measured Frequency (MHz) | Frequency Drift (%) |
| 50 | 120 | 5260.0031 | 0.00006 | 5260.0055 | 0.00010 | 5260.0039 | 0.00007 | 5260.0019 | 0.00004 |
| 40 | 120 | 5260.0015 | 0.00003 | 5260.0001 | 0.00000 | 5260.0015 | 0.00003 | 5260.0012 | 0.00002 |
| 30 | 120 | 5259.9878 | -0.00023 | 5259.9884 | -0.00022 | 5259.9874 | -0.00024 | 5259.9906 | -0.00018 |
| 20 | 120 | 5259.9972 | -0.00005 | 5259.9972 | -0.00005 | 5259.999 | -0.00002 | 5259.9964 | -0.00007 |
| 10 | 120 | 5260.019 | 0.00036 | 5260.0217 | 0.00041 | 5260.0218 | 0.00041 | 5260.0178 | 0.00034 |
| 0 | 120 | 5260.0103 | 0.00020 | 5260.0079 | 0.00015 | 5260.0084 | 0.00016 | 5260.0073 | 0.00014 |
| -10 | 120 | 5259.987 | -0.00025 | 5259.9852 | -0.00028 | 5259.9872 | -0.00024 | 5259.9883 | -0.00022 |
| -20 | 120 | 5260.0154 | 0.00029 | 5260.0193 | 0.00037 | 5260.0164 | 0.00031 | 5260.018 | 0.00034 |
| -30 | 120 | 5260.0104 | 0.00020 | 5260.0103 | 0.00020 | 5260.0131 | 0.00025 | 5260.0124 | 0.00024 |

Frequency Stability Versus Voltage

Operating Frequency: 5260MHz


| Temp. (°C) | Power Supply (Vac) | 0 Minute | | 2 Minute | | 5 Minute | | 10 Minute | |
|------------|--------------------|--------------------------|---------------------|--------------------------|---------------------|--------------------------|---------------------|--------------------------|---------------------|
| | | Measured Frequency (MHz) | Frequency Drift (%) | Measured Frequency (MHz) | Frequency Drift (%) | Measured Frequency (MHz) | Frequency Drift (%) | Measured Frequency (MHz) | Frequency Drift (%) |
| 20 | 138 | 5259.9975 | -0.00005 | 5259.998 | -0.00004 | 5259.9993 | -0.00001 | 5259.9962 | -0.00007 |
| | 120 | 5259.9972 | -0.00005 | 5259.9972 | -0.00005 | 5259.999 | -0.00002 | 5259.9964 | -0.00007 |
| | 102 | 5259.9971 | -0.00006 | 5259.9978 | -0.00004 | 5259.9981 | -0.00004 | 5259.9961 | -0.00007 |

4.7 6dB Bandwidth Measurement

4.7.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.7.2 Test Setup

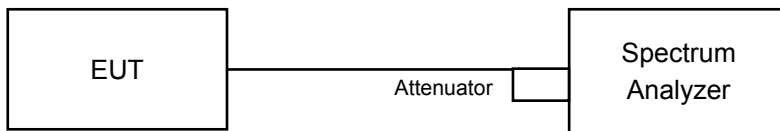

4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

Measurement Procedure REF

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results

1TX

802.11a

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | Minimum Limit (MHz) | Pass / Fail |
|---------|---------------------|---------------------|---------------------|-------------|
| 144 | 5720 For U-NII-3 | 3.20 | 0.5 | Pass |

802.11n (HT20)


| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | Minimum Limit (MHz) | Pass / Fail |
|---------|---------------------|---------------------|---------------------|-------------|
| 144 | 5720 For U-NII-3 | 3.83 | 0.5 | Pass |

802.11n (HT40)

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | Minimum Limit (MHz) | Pass / Fail |
|---------|---------------------|---------------------|---------------------|-------------|
| 142 | 5710 For U-NII-3 | 3.24 | 0.5 | Pass |

802.11ac (VHT80)

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | Minimum Limit (MHz) | Pass / Fail |
|---------|---------------------|---------------------|---------------------|-------------|
| 138 | 5690 For U-NII-3 | 2.79 | 0.5 | Pass |

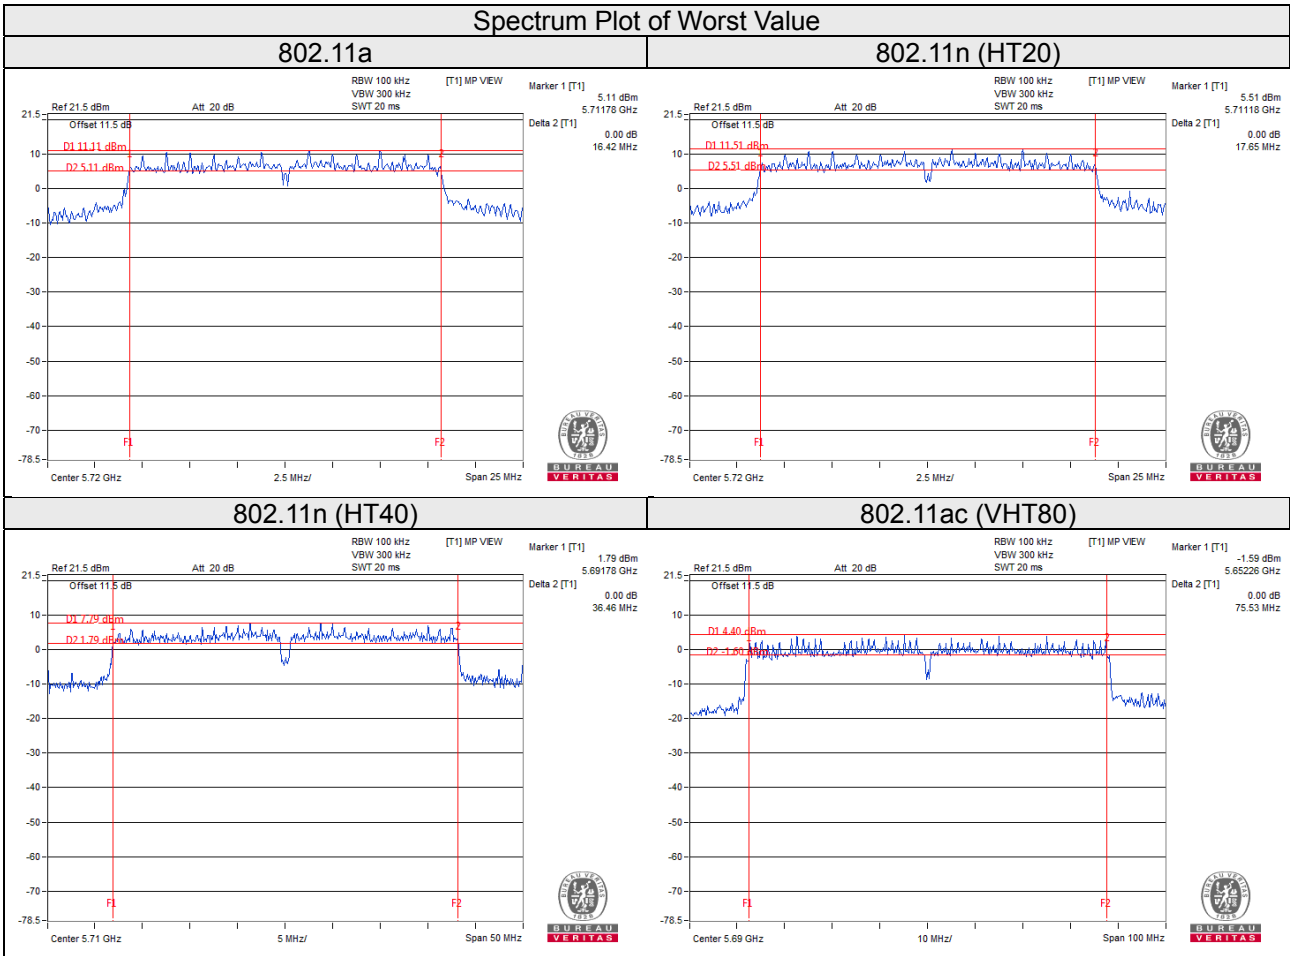

Note:

- For CH144 (UNII-3 Band): The 6dB bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz
- For CH142 (UNII-3 Band): The 6dB bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz
- For CH138 (UNII-3 Band): The 6dB bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz

2TX

802.11a

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | | Minimum Limit (MHz) | Pass / Fail |
|---------|---------------------|---------------------|---------|---------------------|-------------|
| | | Chain 0 | Chain 1 | | |
| 144 | 5720 For U-NII-3 | 3.19 | 2.91 | 0.5 | Pass |

802.11n (HT20)

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | | Minimum Limit (MHz) | Pass / Fail |
|---------|---------------------|---------------------|---------|---------------------|-------------|
| | | Chain 0 | Chain 1 | | |
| 144 | 5720 For U-NII-3 | 3.82 | 3.56 | 0.5 | Pass |

802.11n (HT40)

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | | Minimum Limit (MHz) | Pass / Fail |
|---------|---------------------|---------------------|---------|---------------------|-------------|
| | | Chain 0 | Chain 1 | | |
| 142 | 5710 For U-NII-3 | 3.26 | 3.25 | 0.5 | Pass |



802.11ac (VHT80)

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | | Minimum Limit (MHz) | Pass / Fail |
|---------|---------------------|---------------------|---------|---------------------|-------------|
| | | Chain 0 | Chain 1 | | |
| 138 | 5690 For U-NII-3 | 3.26 | 2.87 | 0.5 | Pass |

Spectrum Plot of Worst Value



802.11a

802.11n (HT20)

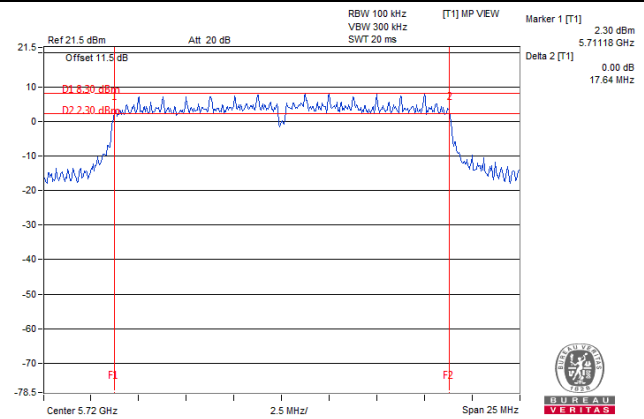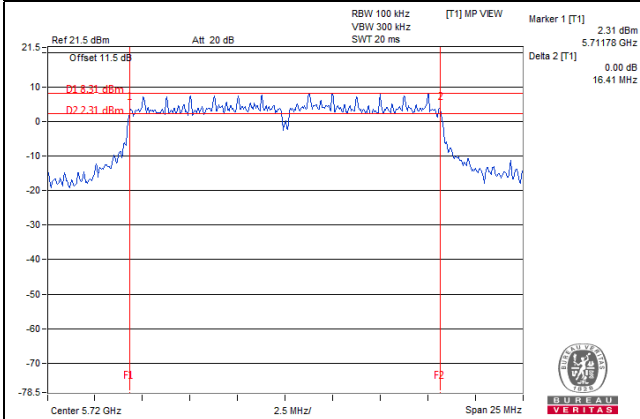

802.11n (HT40)

802.11ac (VHT80)

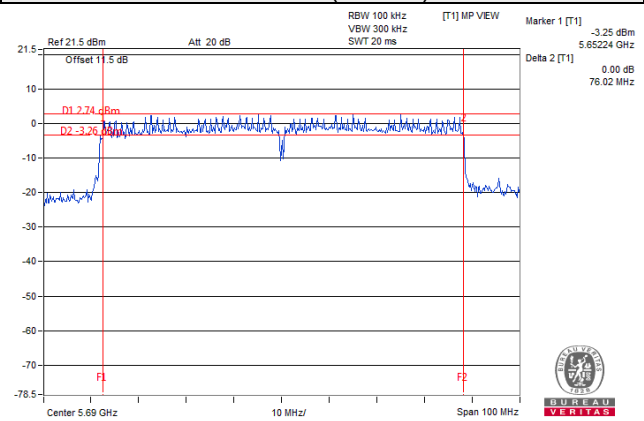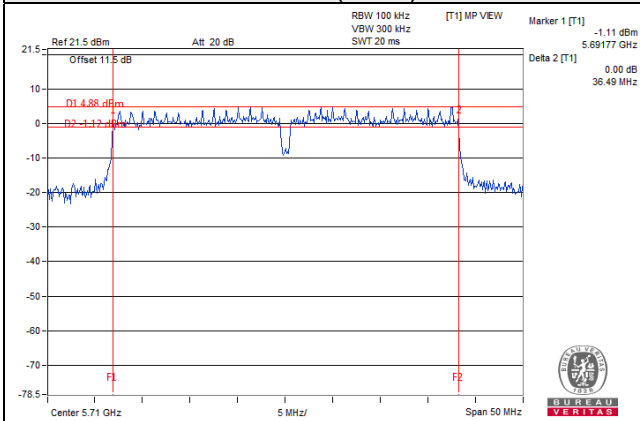

Note:

For CH144 (UNII-3 Band): The 6dB bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz

For CH142 (UNII-3 Band): The 6dB bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz

For CH138 (UNII-3 Band): The 6dB bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---