



ELECTRICAL SPECIFICATIONS

Frequency Range: 2.4-2.48/5.15-5.85/6-7.125 GHz
 Gain: 4/6/6 dBi
 Polarization: Vertical
 Horizontal Beamwidth: 4 (360°/360°) 6 (360°/360°/360°)
 Vertical Beamwidth: 4 (105°/105°) 6 (105°/105°/105°)
 VSWR: <2.0



MECHANICAL SPECIFICATIONS

Dimensions: 6.5" x 6.3" (165mm D x 160mm H)
 Weight: 1.5 lb (0.68 kg)

Radome Material: ABS
 Connector: 10 MPC
 Number of Leads: 10
 Cable Length: 36" (910mm)
 Cable Type: RG316



ENVIRONMENTAL SPECIFICATIONS

Installation Environment: Indoor/Outdoor


WARRANTY

2 Year Limited Warranty




HORIZONTAL


VERTICAL

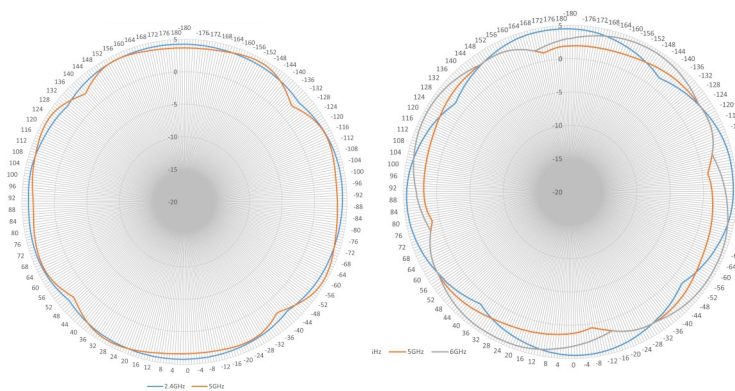


4Port - Horizontal

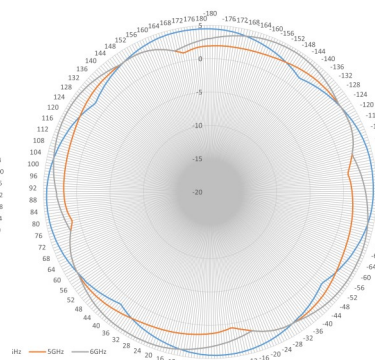

6Port - Horizontal

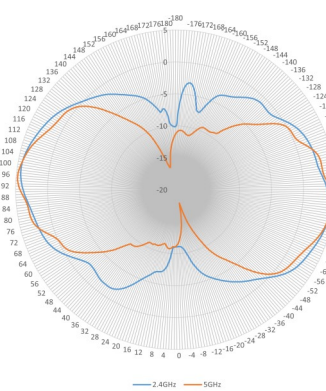

4Port - Vertical

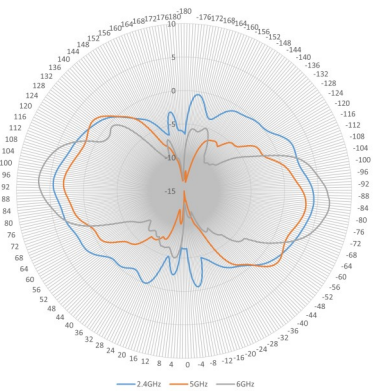

6Port - Vertical