76mm

Product Name: Power Station Model No.: STORM 700B 01US Battery Capacity: 22.2Vdc,30Ah,666Wh DC Input: 24V:::5A,120W AC Output*2: AC 110V 60Hz,Rated Power: 700W Solar Input: 12-28V,150W Max. Type C1 PD3.0 Input: 20V --- 3.25A,65W Max. DC 5521 Output: 12V--5A Total Output Power: 800W Car Charge and DC 5521 Output: 12V == 10A,120W Max. USB-A1/A2 QC3.0 Output: 5V---4.5A,9V---2A,12V---1.5A Wireless Output: 15W Max. USB-A3/A4 QC3.0 Output: 5V--3A,9V--2A,12V--1.5A Total DC Output: 347W Max. Type-C1 PD3.0 Output: 5V-15V--3A,20V--5A Working Environment Temperature: -10°C ~ 40°C Type-C2 PD3.0 Output: 5V-9V-:-3A,12V-:-2.5A,15V-2A Charging Temperature Of Cells: 0 ℃ ~ 45 ℃ Manufacturer: Dongguan Arun Industrial Co.,Ltd. FCC ID: 2AHCL-STORM700

Address: No.13,Xinfeng st.,Changlong,Huangjiang,Dongguan,Guangdong

















43mm

R 5mm -

LABLE Location

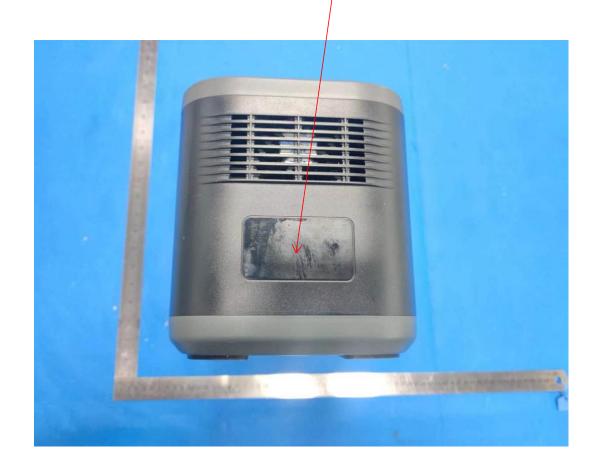

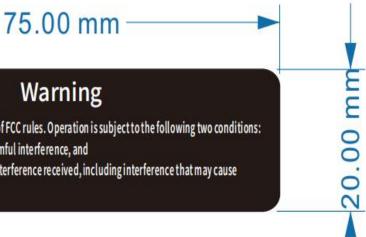

 $This device \, complies \, with \, Part \, 15 \, of \, FCC \, rules. \, Operation \, is \, subject \, to \, the \, following \, two \, conditions: \, and \, conditions \, following \, two \, conditions \, following \, two \, conditions \, followed by the experiments of the experiment of the experiments of the experimen$

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

R3mm

LABLE Location

