



中认信通
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: AKUVOX (XIAMEN) NETWORKS CO., LTD.

Address: 10/F, No.56, Software Park II , Xiamen, China

FCC ID: 2AHCR-IT82XV2

Product Name: Indoor Monitor

Model Number: IT82A,IT82W

**Standard(s): 47 CFR Part 15 Subpart B
ANSI C63.4-2014**

The above equipment has been tested and found compliance with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR21110021-00C

Date Of Issue: 2022-02-22

Reviewed By: Sun Zhong *Sun Zhong*

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,

Guangdong, China

Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 DESCRIPTION OF TEST CONFIGURATION	5
1.2.2 Support Equipment List and Details	5
1.2.3 Support Cable List and Details	5
1.2.4 Block Diagram of Test Setup.....	6
1.3 MEASUREMENT UNCERTAINTY	8
2. SUMMARY OF TEST RESULTS	9
3. REQUIREMENTS AND TEST PROCEDURES	10
3.1 AC LINE CONDUCTED EMISSIONS.....	10
3.1.1 EUT Setup.....	10
3.1.2 EMI Test Receiver Setup	10
3.1.3 Test Procedure	11
3.1.4 Corrected Amplitude & Margin Calculation.....	11
3.2 RADIATION SPURIOUS EMISSIONS	12
3.2.1 EUT Setup.....	12
3.2.2 EMI Test Receiver Setup	13
3.2.3 Test Procedure	13
3.2.4 Corrected Amplitude & Margin Calculation.....	13
4. TEST DATA AND RESULTS	14
4.1 AC LINE CONDUCTED EMISSIONS.....	14
4.2 RADIATION SPURIOUS EMISSIONS	19

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Indoor Monitor
EUT Model:	IT82A
Multiple Model:	IT82W
Highest Operation Frequency:	2480 MHz
Rated Input Voltage:	DC 12V from DC Port or 48V from POE
Serial Number:	CR21110021-S1
EUT Received Date:	2021.11.18
EUT Received Status:	Good
Note: The Multiple models are electrically identical with the test model. Please refer to the declaration letter for more detail, which was provided by manufacturer.	

Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
/	/	/	/

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Typical Use Mode, which was provided by the manufacturer. Test Mode: Operating
Equipment Modifications:	No
EUT Exercise Software:	No

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
AKUVOX (XIAMEN) NETWORKS CO., LTD.	Load	Unknown	CR21110002-S3
GOSPELL DIGITAL TECHNOLOGY CO.,LTD	POE	G0720-480-050	2014-0002925
ORIENTAL HERO ELE.FTY	Adapter	OH-1015A1201000U3-UL	96DG E230964
TOTOLINK	Router	LR1200	LR1200155P00167

1.2.3 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
RJ45 Cable	No	Yes	10	EUT/PoE	Router
RJ45 Cable	No	Yes	1.0	PoE	EUT
Signal Cable	No	No	10	EUT	Load
DC Power Cable	No	Yes	1.2	Adapter	EUT

1.2.4 Block Diagram of Test Setup

Adapter:

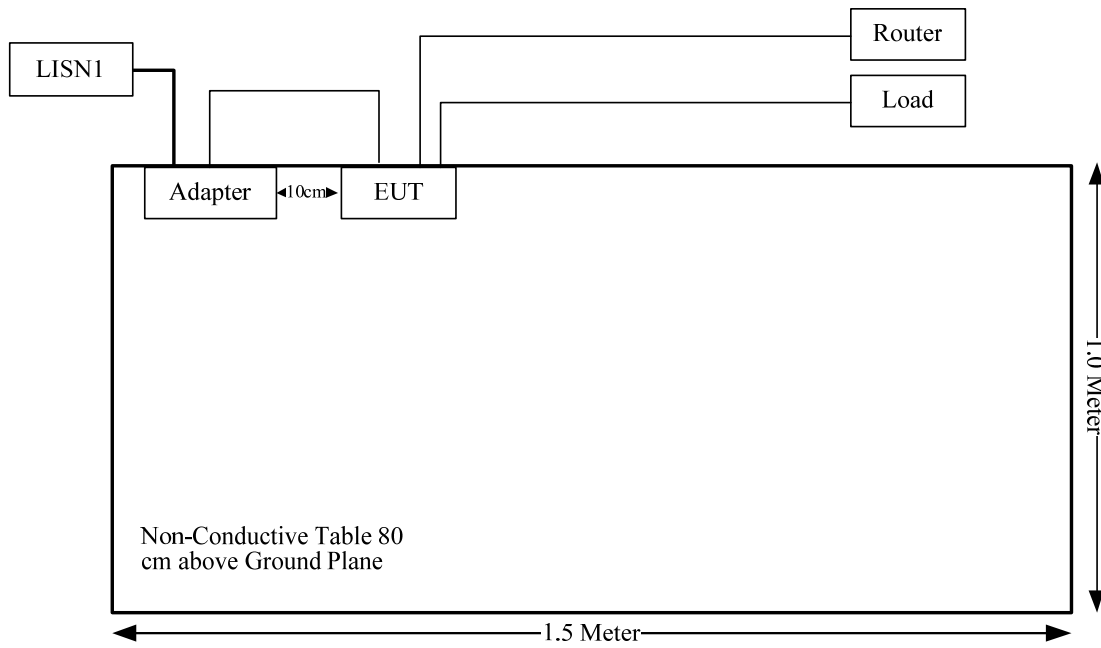


POE:

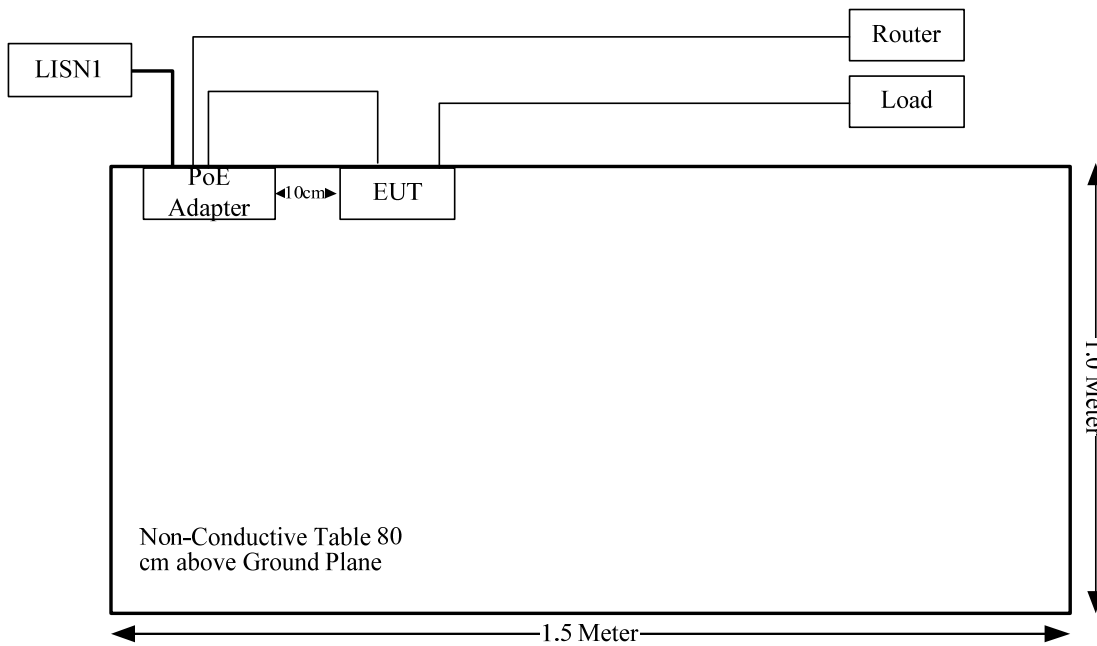


Radiated emissions

Adapter:

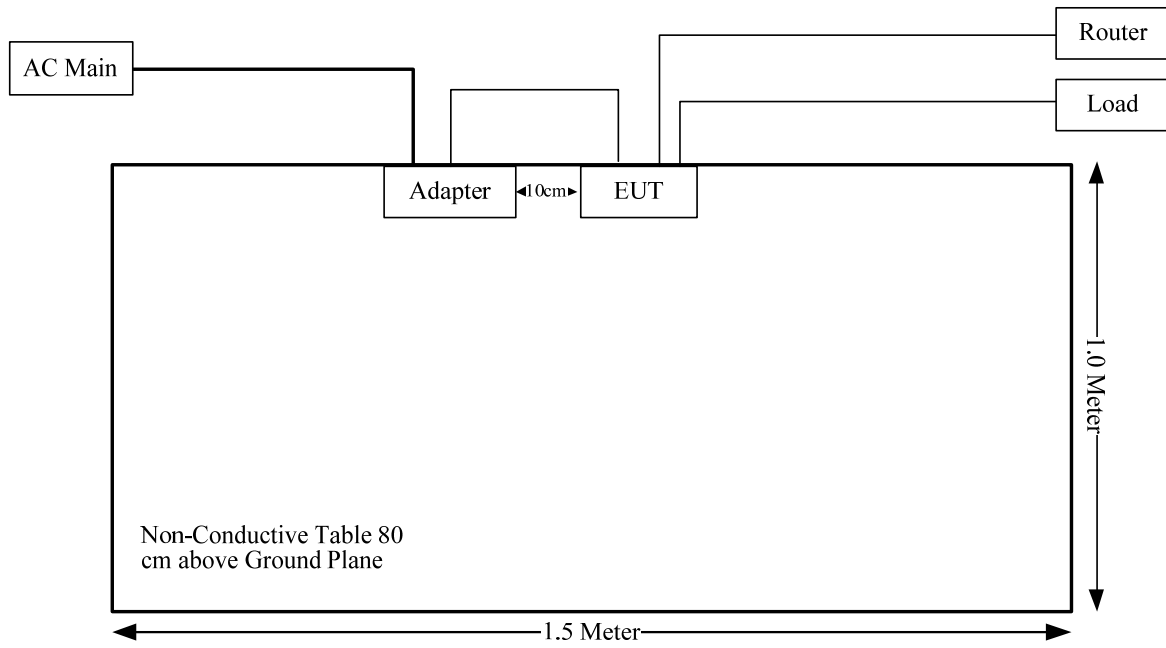

POE:

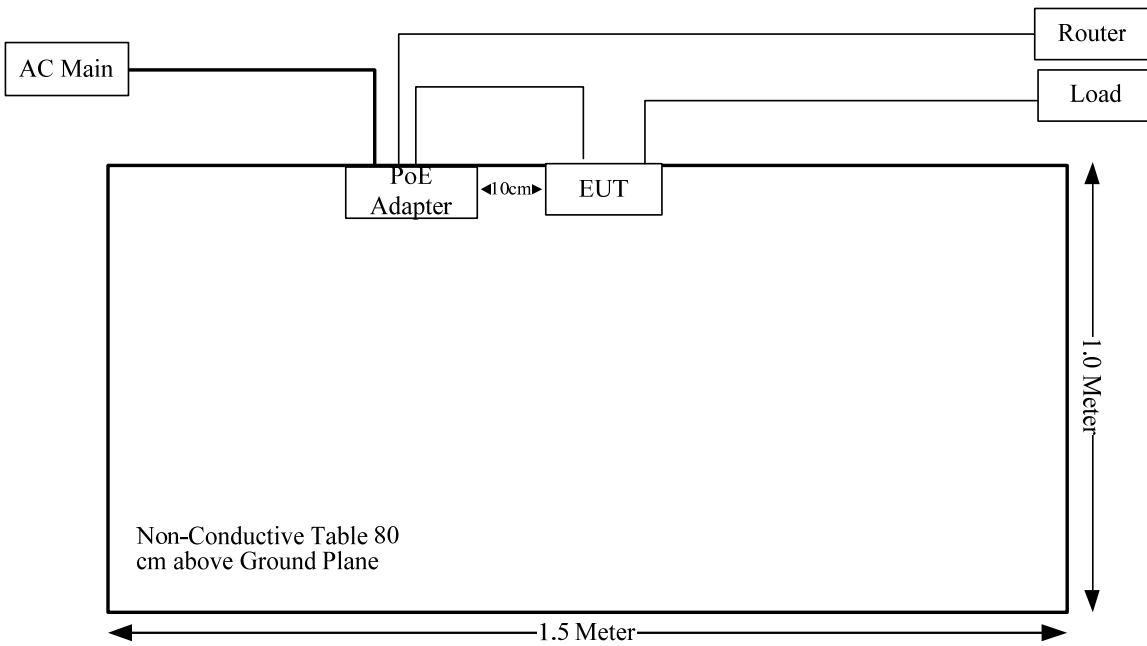

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5\%$
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)


2. SUMMARY OF TEST RESULTS

Standard(s) Section	Description of Test	Result
§15.107	Conducted emissions	Compliance
§15.109	Radiated emissions	Compliance

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 EUT Setup

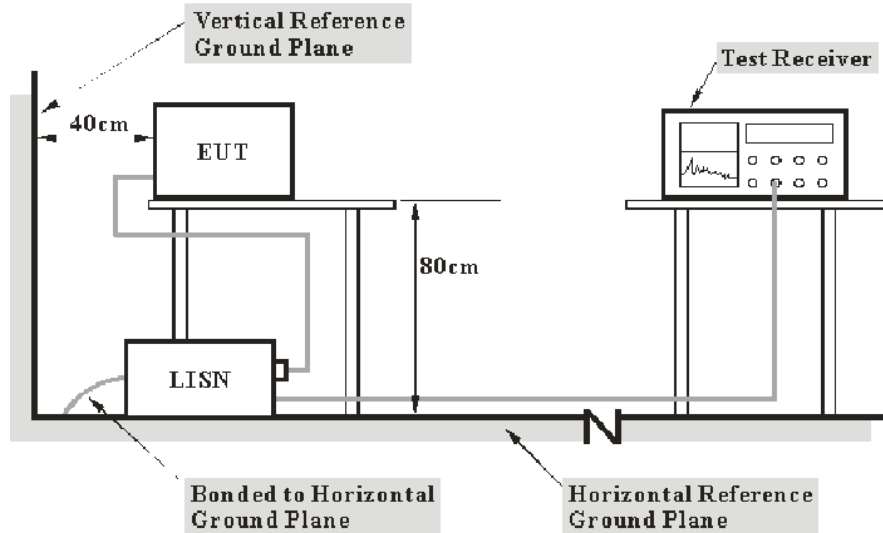

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15 B Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.2 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.3 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT, the report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

All data was recorded in the Quasi-peak and average detection mode.

The report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

3.1.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN


The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


3.2 Radiation Spurious Emissions

3.2.1 EUT Setup

Below 1GHz:

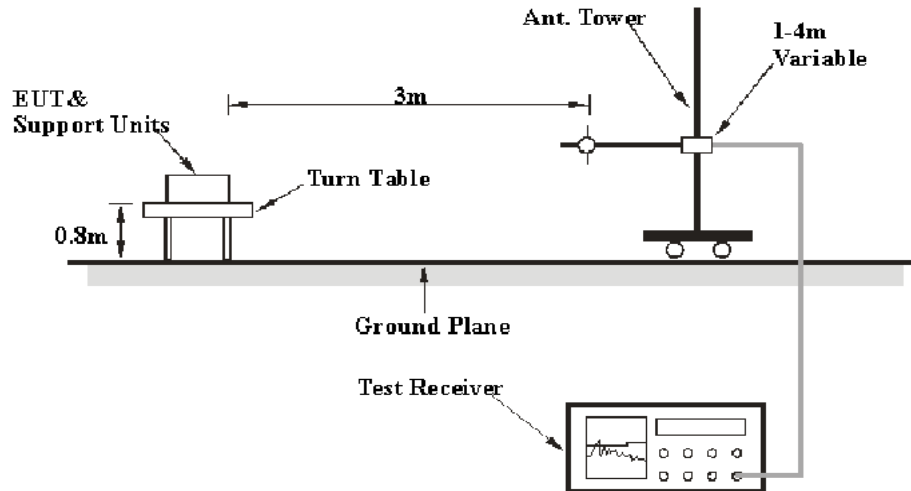

Above 1GHz:

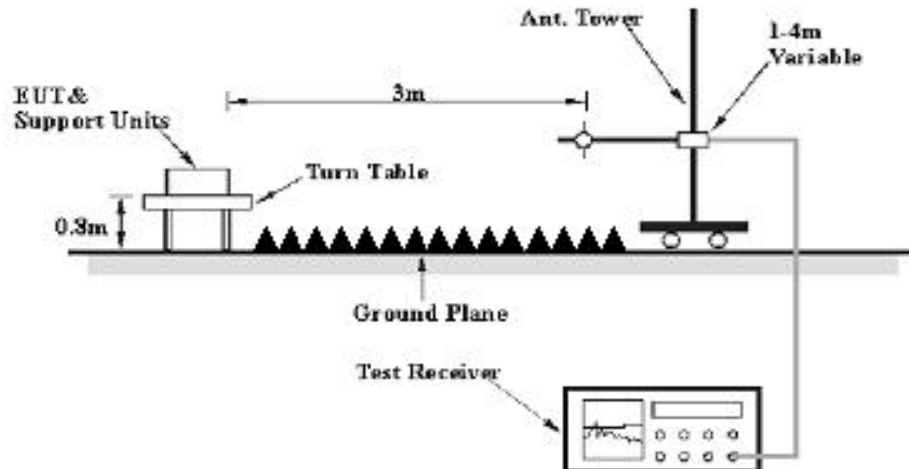

The radiated emission were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was with the FCC Part 15 B Class B limits.

3.2.2 EMI Test Receiver Setup

The system was investigated from 30 MHz to 13 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	Peak
	1 MHz	Reduced video bandwidth	/	AVG

If the maximized peak measured value complies with under the limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.3 Test Procedure

During the radiated emissions, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz, peak and average detection mode above 1 GHz.

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4. TEST DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	CR21110021-S1	Test Date:	2021/12/16
Test Site:	CE	Test Mode:	Operating
Tester:	Nick Tang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22.5	Relative Humidity: (%)	69	ATM Pressure: (kPa)	101.1
----------------------	------	------------------------------	----	------------------------	-------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2021-04-25	2022-04-24
R&S	EMI Test Receiver	ESR3	102726	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2021-08-08	2022-08-07
Audix	Test Software	E3	190306 (V9)	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*


AC/DC Adapter:

Line:

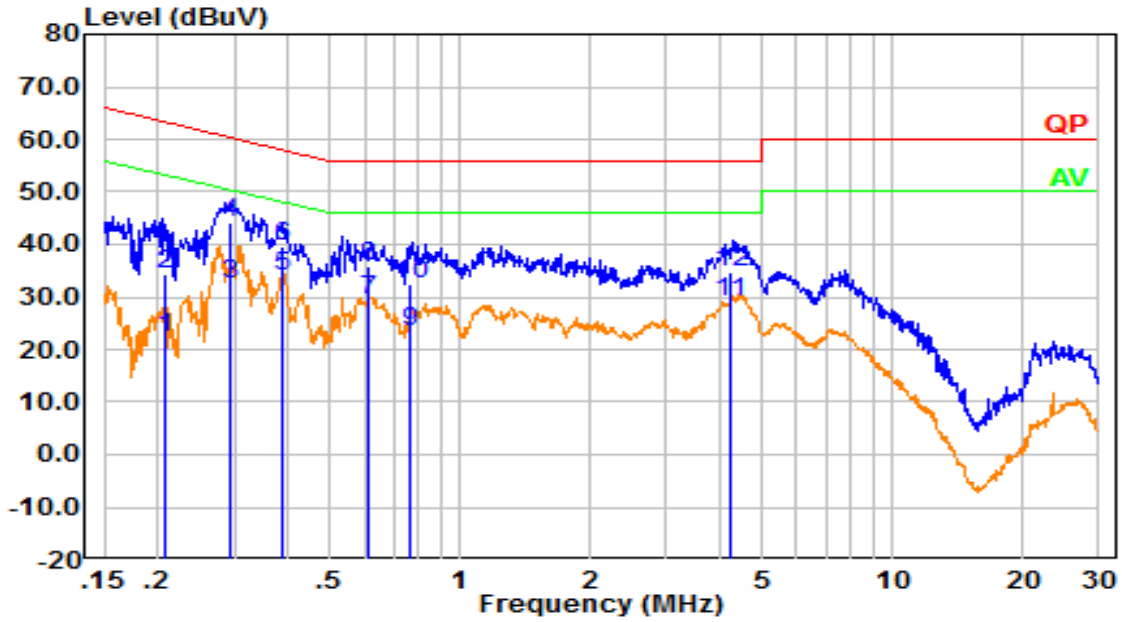

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector
1	0.206	12.72	9.61	22.33	53.36	31.03	Average
2	0.206	24.58	9.61	34.19	63.36	29.17	QP
3	0.292	22.76	9.61	32.37	50.47	18.10	Average
4	0.292	34.48	9.61	44.09	60.47	16.38	QP
5	0.387	24.47	9.61	34.08	48.13	14.05	Average
6	0.387	30.02	9.61	39.63	58.13	18.50	QP
7	0.615	19.89	9.62	29.51	46.00	16.49	Average
8	0.615	26.23	9.62	35.85	56.00	20.15	QP
9	0.763	13.73	9.62	23.35	46.00	22.65	Average
10	0.763	22.67	9.62	32.29	56.00	23.71	QP
11	4.211	19.49	9.65	29.14	46.00	16.86	Average
12	4.211	25.19	9.65	34.84	56.00	21.16	QP


Neutral:

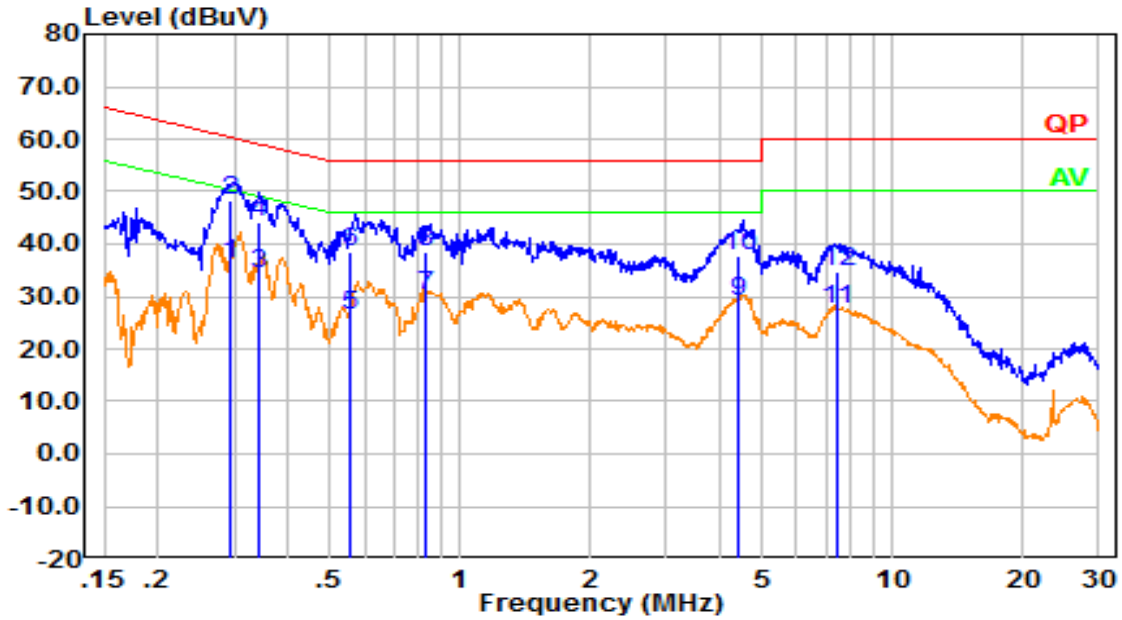

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector
1	0.295	26.67	9.61	36.28	50.39	14.11	Average
2	0.295	38.54	9.61	48.15	60.39	12.24	QP
3	0.343	24.91	9.61	34.52	49.13	14.61	Average
4	0.343	34.68	9.61	44.29	59.13	14.84	QP
5	0.558	16.89	9.62	26.51	46.00	19.49	Average
6	0.558	28.97	9.62	38.58	56.00	17.42	QP
7	0.830	20.64	9.62	30.26	46.00	15.74	Average
8	0.830	28.93	9.62	38.55	56.00	17.45	QP
9	4.412	19.47	9.65	29.13	46.00	16.87	Average
10	4.412	28.00	9.65	37.65	56.00	18.35	QP
11	7.422	17.76	9.66	27.42	50.00	22.58	Average
12	7.422	25.19	9.66	34.85	60.00	25.15	QP


POE Adapter:

Line:

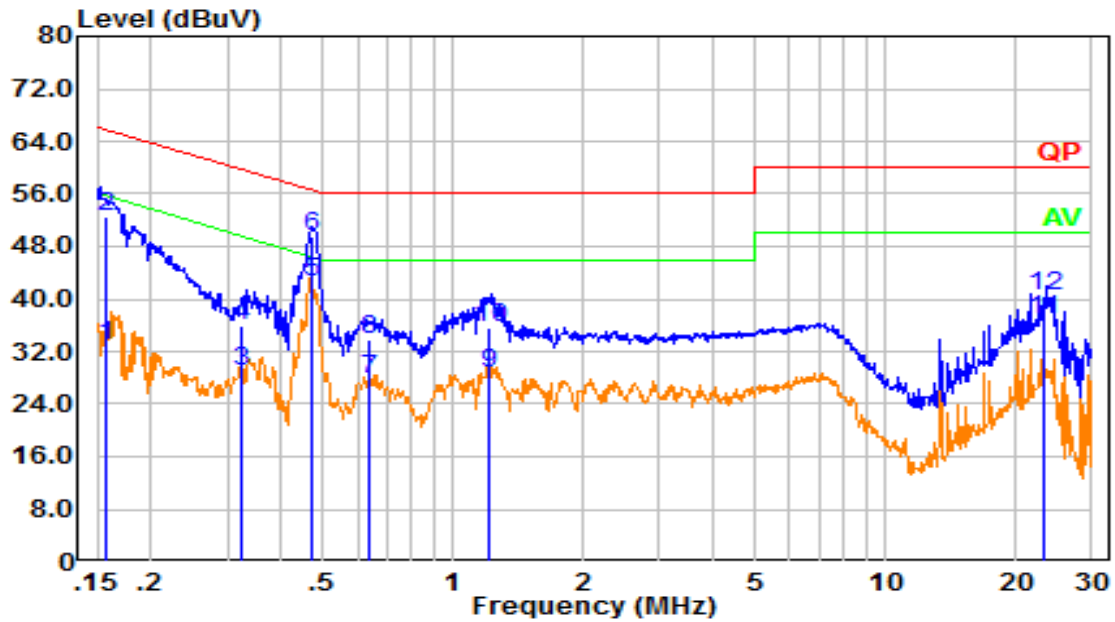

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector
1	0.158	23.37	9.61	32.98	55.56	22.58	Average
2	0.158	42.99	9.61	52.60	65.56	12.96	QP
3	0.325	19.41	9.61	29.02	49.57	20.55	Average
4	0.325	26.20	9.61	35.81	59.57	23.76	QP
5	0.472	32.94	9.61	42.55	46.48	3.93	Average
6	0.472	39.81	9.61	49.42	56.48	7.06	QP
7	0.641	18.24	9.62	27.86	46.00	18.14	Average
8	0.641	24.28	9.62	33.90	56.00	22.10	QP
9	1.203	19.01	9.62	28.63	46.00	17.37	Average
10	1.203	26.09	9.62	35.71	56.00	20.29	QP
11	23.127	26.92	9.81	36.73	50.00	13.27	Average
12	23.127	30.78	9.81	40.59	60.00	19.41	QP

Neutral:

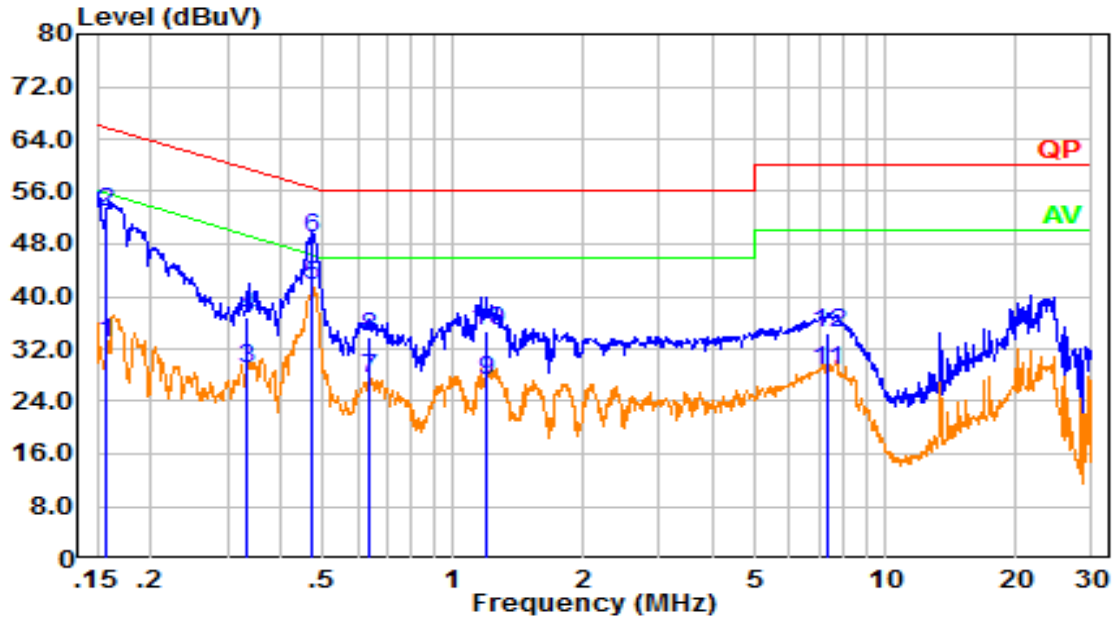

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector
1	0.158	23.36	9.61	32.97	55.58	22.61	Average
2	0.158	43.15	9.61	52.76	65.58	12.82	QP
3	0.334	19.51	9.61	29.12	49.34	20.22	Average
4	0.334	27.34	9.61	36.95	59.34	22.39	QP
5	0.473	32.17	9.61	41.78	46.47	4.69	Average
6	0.473	39.40	9.61	49.01	56.47	7.46	QP
7	0.638	17.87	9.62	27.49	46.00	18.51	Average
8	0.638	24.09	9.62	33.71	56.00	22.29	QP
9	1.193	17.68	9.62	27.31	46.00	18.69	Average
10	1.193	25.22	9.62	34.84	56.00	21.16	QP
11	7.323	19.02	9.66	28.68	50.00	21.32	Average
12	7.323	24.74	9.66	34.40	60.00	25.60	QP

4.2 Radiation Spurious Emissions

Serial Number:	CR21110021-S1	Test Date:	2021/12/18~2022/02/15
Test Site:	966-1, 966-2	Test Mode:	Operating
Tester:	Great Qiao	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22.5~24.3	Relative Humidity: (%)	51~72	ATM Pressure: (kPa)	101.3
----------------------	-----------	------------------------------	-------	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020-10-19	2023-10-18
R&S	EMI Test Receiver	ESR3	102724	2021-07-22	2022-07-21
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2021-07-18	2022-07-17
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2021-07-18	2022-07-17
Sonoma	Amplifier	310N	186165	2021-07-18	2022-07-17
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
R&S	Spectrum Analyzer	FSV40	101591	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2021-08-08	2022-08-07
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2021-08-08	2022-08-07
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2021-08-08	2022-08-07
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2021-08-08	2022-08-07
Audix	Test Software	E3	201021 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

1) 30MHz-1GHz:


AC/DC Adapter:

Horizontal:

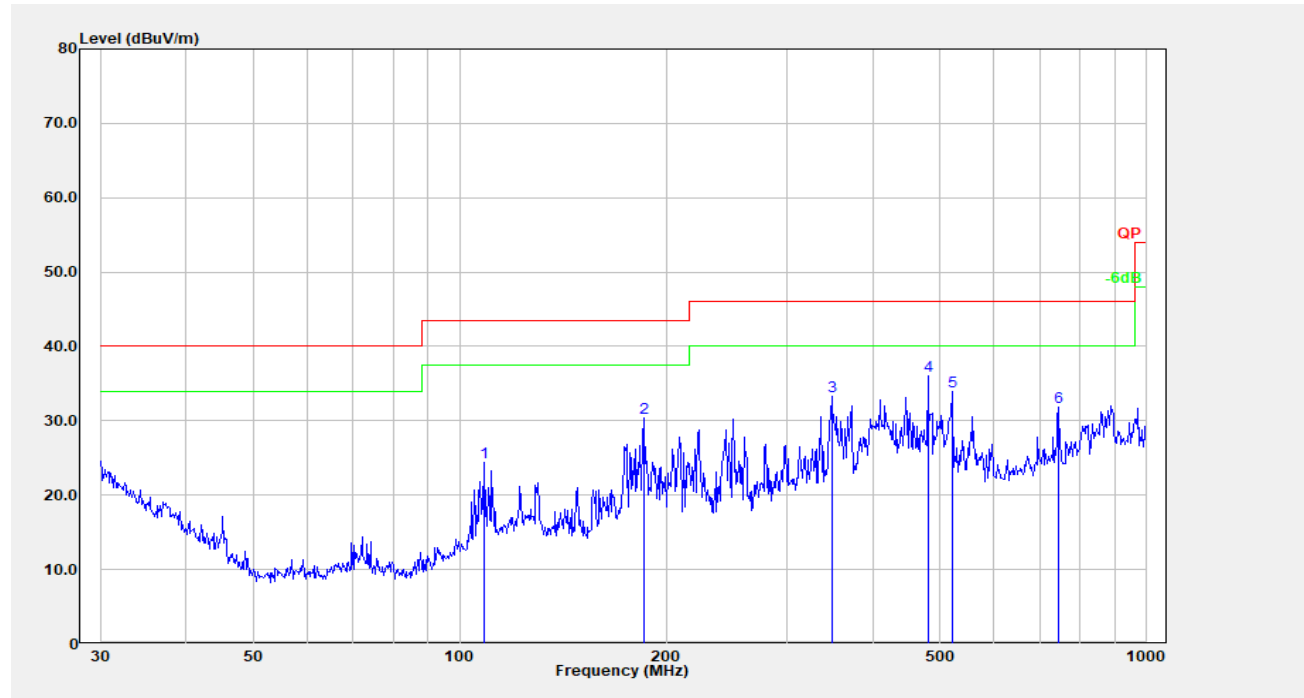


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	108.647	37.19	-12.82	24.37	43.50	19.13	Peak
2	185.138	44.15	-13.71	30.44	43.50	13.06	Peak
3	348.027	43.58	-10.24	33.33	46.00	12.67	Peak
4	480.528	42.53	-6.49	36.04	46.00	9.96	Peak
5	520.888	40.06	-6.07	33.98	46.00	12.02	Peak
6	744.866	34.91	-3.11	31.80	46.00	14.20	Peak

Vertical:

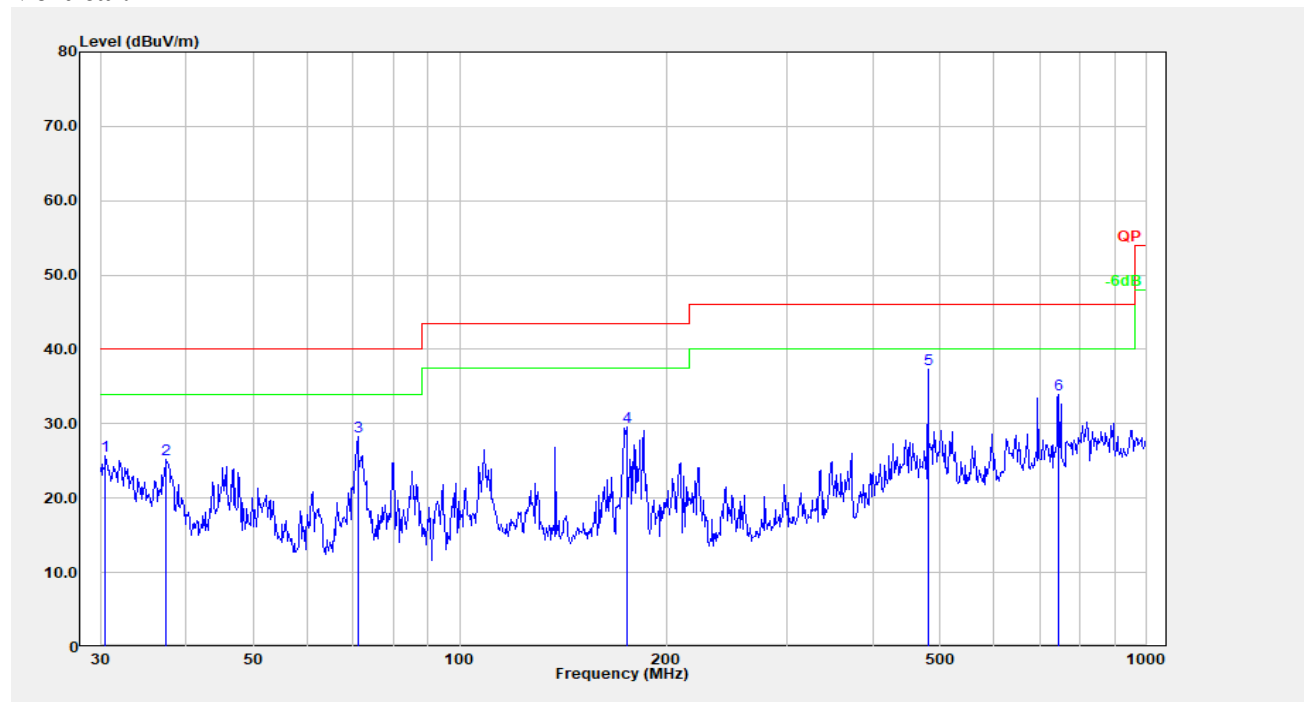


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.531	29.83	-4.20	25.64	40.00	14.36	Peak
2	37.416	34.76	-9.49	25.27	40.00	14.73	Peak
3	71.080	45.16	-16.84	28.32	40.00	11.68	Peak
4	175.037	43.06	-13.54	29.52	43.50	13.98	Peak
5	480.528	43.88	-6.49	37.39	46.00	8.61	Peak
6	744.866	36.98	-3.11	33.87	46.00	12.13	Peak

**POE Adapter:
Horizontal:**

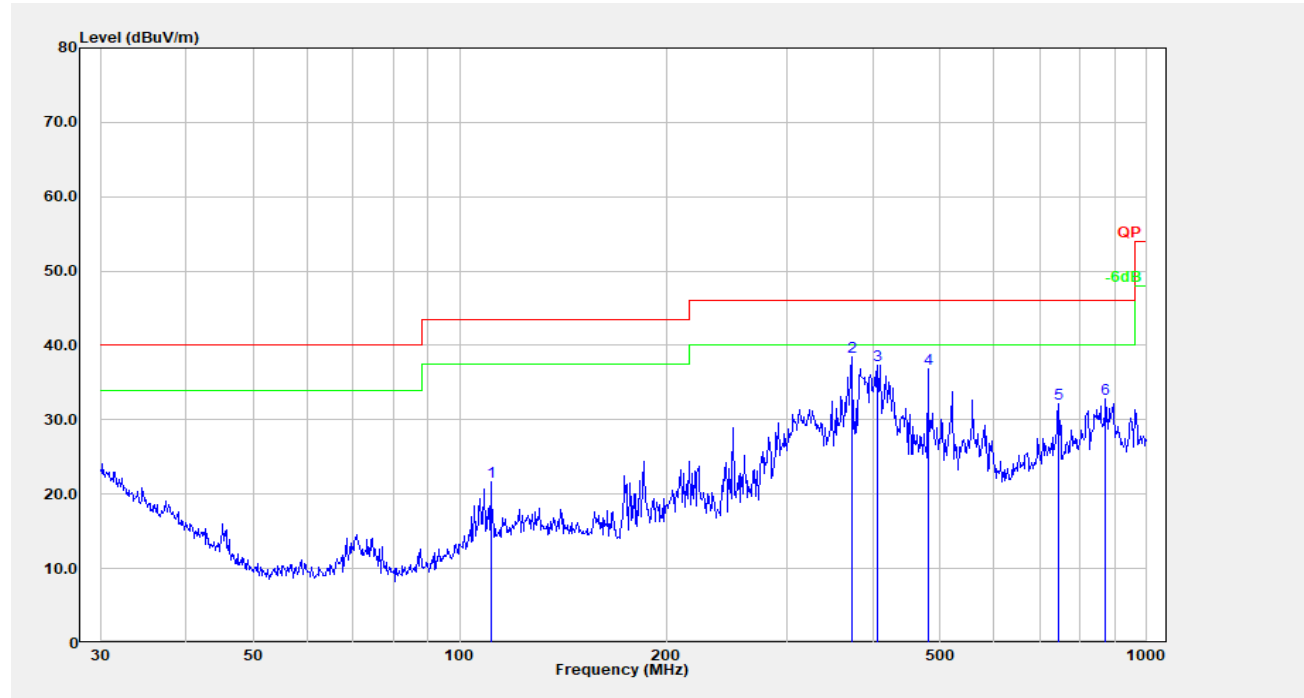


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	110.957	34.20	-12.51	21.68	43.50	21.82	Peak
2	372.005	48.11	-9.66	38.45	46.00	7.55	Peak
3	406.088	46.16	-8.81	37.35	46.00	8.65	Peak
4	480.528	43.28	-6.49	36.79	46.00	9.21	Peak
5	744.866	35.24	-3.11	32.13	46.00	13.87	Peak
6	872.183	34.27	-1.46	32.81	46.00	13.19	Peak

Vertical:

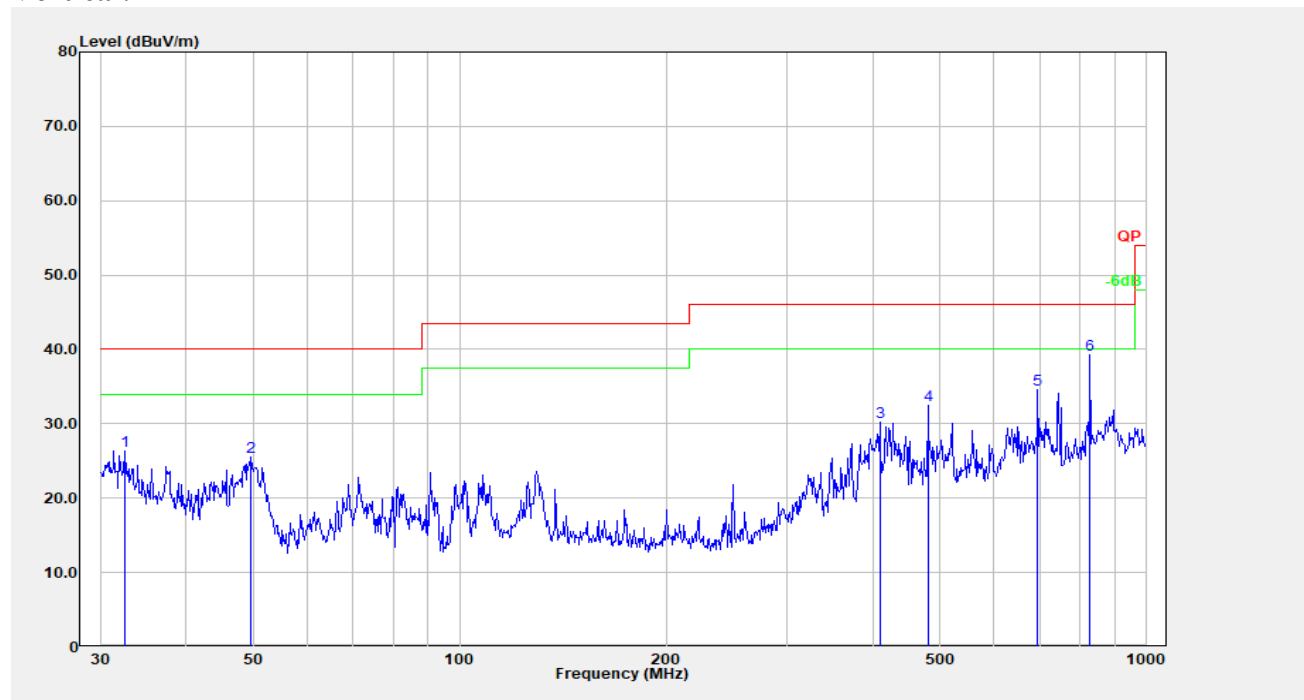


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	32.520	32.11	-5.74	26.37	40.00	13.63	Peak
2	49.707	42.68	-17.21	25.47	40.00	14.53	Peak
3	408.946	38.83	-8.66	30.17	46.00	15.83	Peak
4	480.528	38.96	-6.49	32.47	46.00	13.53	Peak
5	694.417	38.32	-3.65	34.67	46.00	11.33	Peak
6	827.493	41.13	-1.85	39.28	46.00	6.72	Peak

2) Above 1GHz
AC/DC Adapter:
Horizontal:

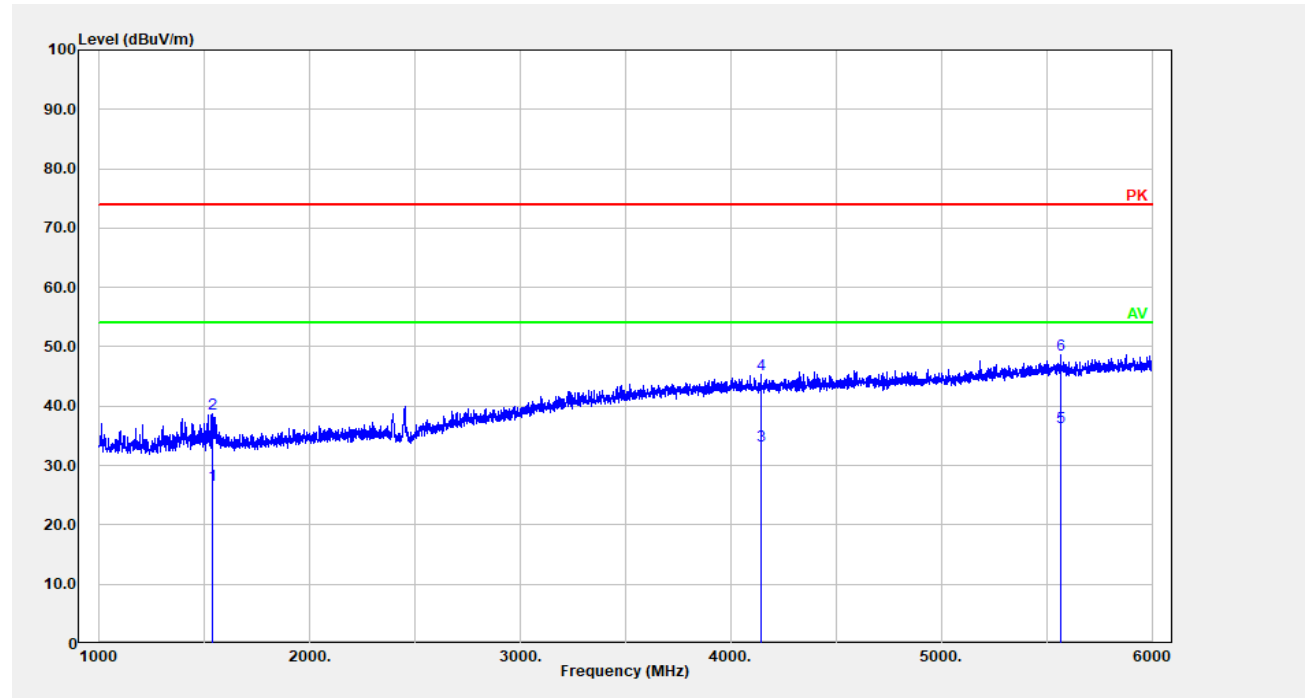


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	1534.107	27.03	-0.31	26.72	54.00	27.28	Average
2	1534.107	39.06	-0.31	38.75	74.00	35.25	Peak
3	4144.629	23.71	9.63	33.34	54.00	20.66	Average
4	4144.629	35.69	9.63	45.32	74.00	28.68	Peak
5	5566.914	23.50	12.88	36.38	54.00	17.62	Average
6	5566.914	35.78	12.88	48.66	74.00	25.34	Peak

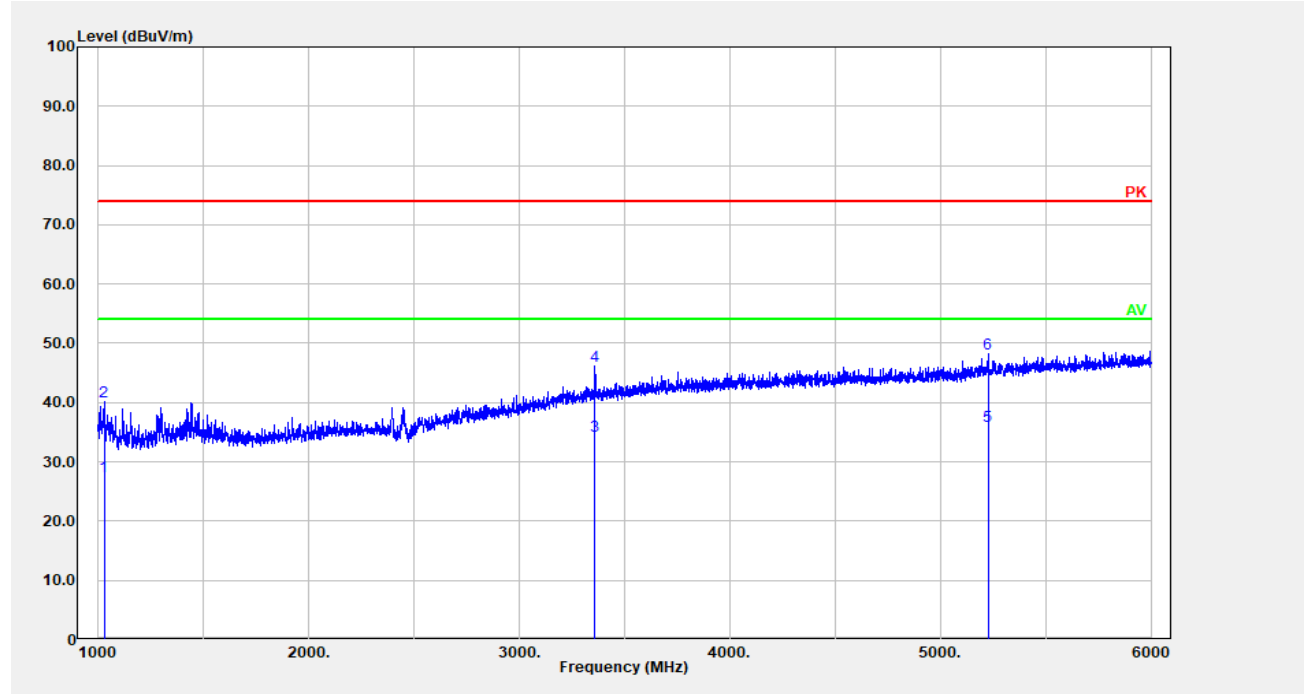Vertical:


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	1027.005	30.08	-2.49	27.59	54.00	26.41	Average
2	1027.005	42.69	-2.49	40.20	74.00	33.80	Peak
3	3359.472	26.51	7.93	34.44	54.00	19.56	Average
4	3359.472	38.34	7.93	46.27	74.00	27.73	Peak
5	5225.845	24.17	11.87	36.04	54.00	17.96	Average
6	5225.845	36.45	11.87	48.32	74.00	25.68	Peak

Horizontal:

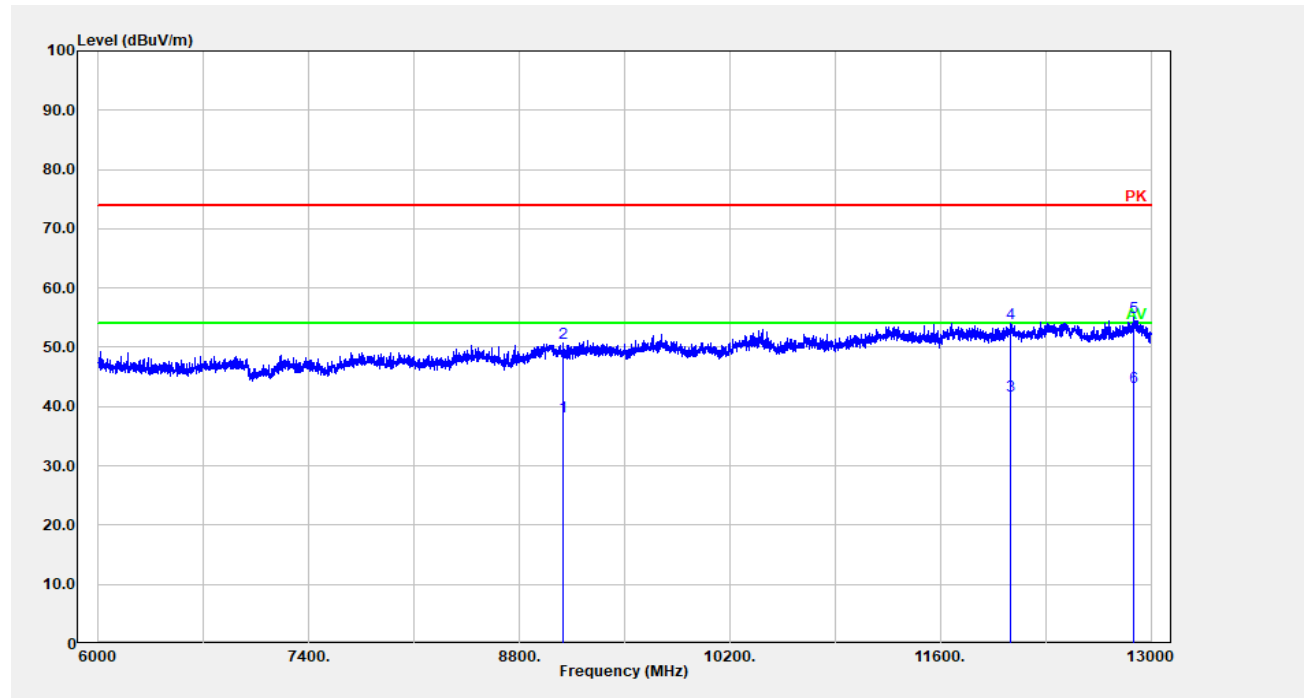


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	9089.018	21.19	17.14	38.33	54.00	15.67	Average
2	9089.018	33.68	17.14	50.82	74.00	23.18	Peak
3	12067.410	21.40	20.49	41.89	54.00	12.11	Average
4	12067.410	33.64	20.49	54.13	74.00	19.87	Peak
5	12886.580	33.65	21.48	55.12	74.00	18.88	Peak
6	12886.580	21.80	21.48	43.28	54.00	10.72	Average

Vertical:

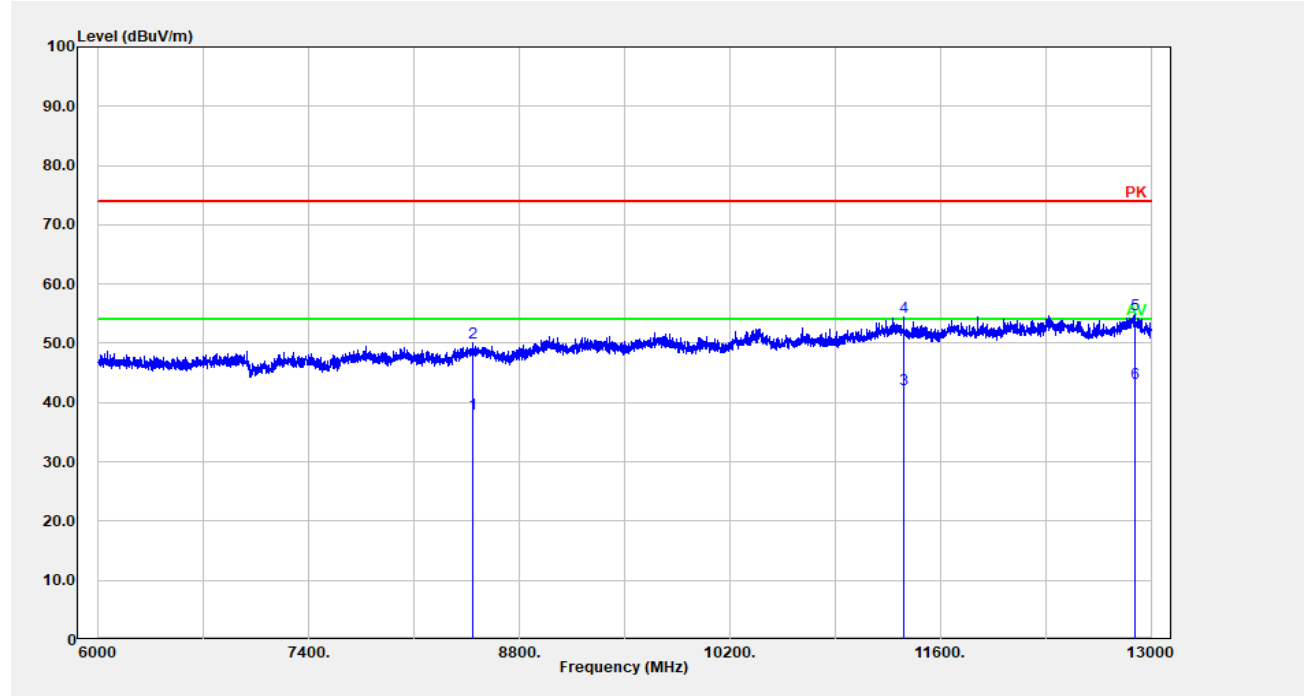


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	8492.498	21.65	16.40	38.05	54.00	15.95	Average
2	8492.498	33.72	16.40	50.12	74.00	23.88	Peak
3	11358.870	22.51	19.63	42.14	54.00	11.86	Average
4	11358.870	34.85	19.63	54.48	74.00	19.52	Peak
5	12893.580	33.33	21.54	54.87	74.00	19.13	Peak
6	12893.580	21.72	21.54	43.26	54.00	10.74	Average

**POE Adapter:
Horizontal:**

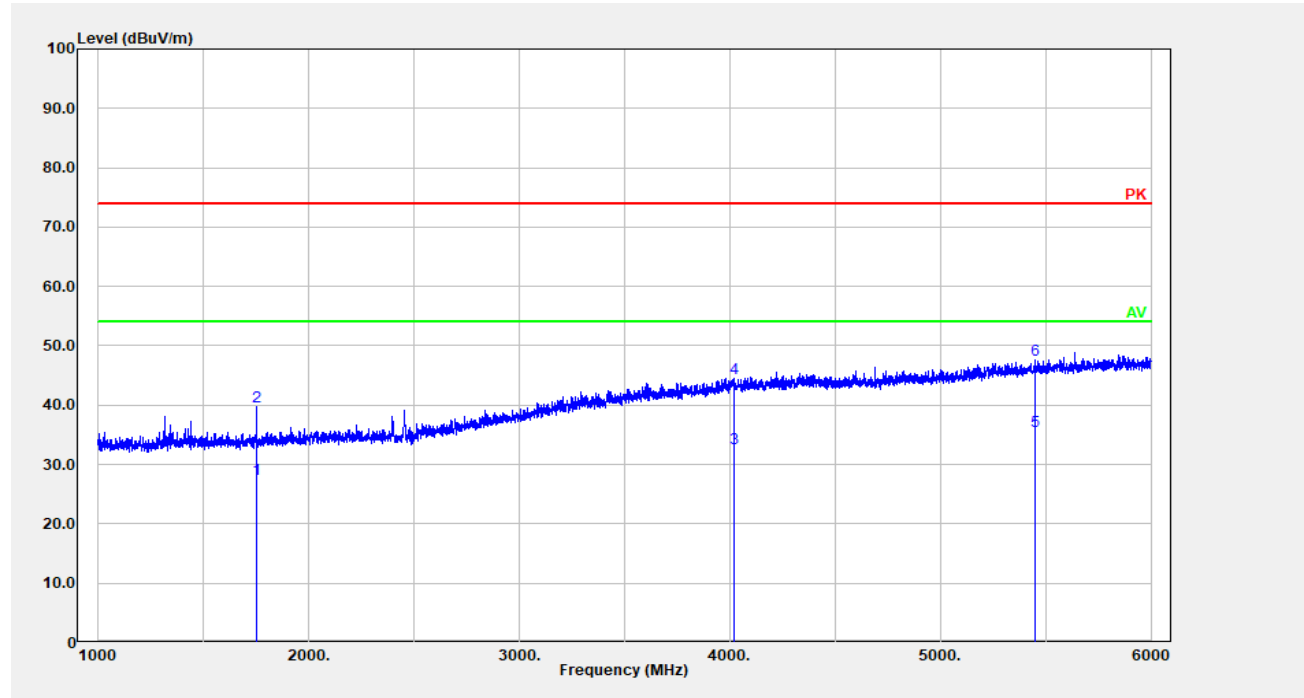


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	1751.150	26.39	1.11	27.50	54.00	26.50	Average
2	1751.150	38.70	1.11	39.81	74.00	34.19	Peak
3	4017.604	22.80	9.96	32.76	54.00	21.24	Average
4	4017.604	34.55	9.96	44.52	74.00	29.48	Peak
5	5450.890	23.09	12.49	35.58	54.00	18.42	Average
6	5450.890	35.22	12.49	47.71	74.00	26.29	Peak

Vertical:

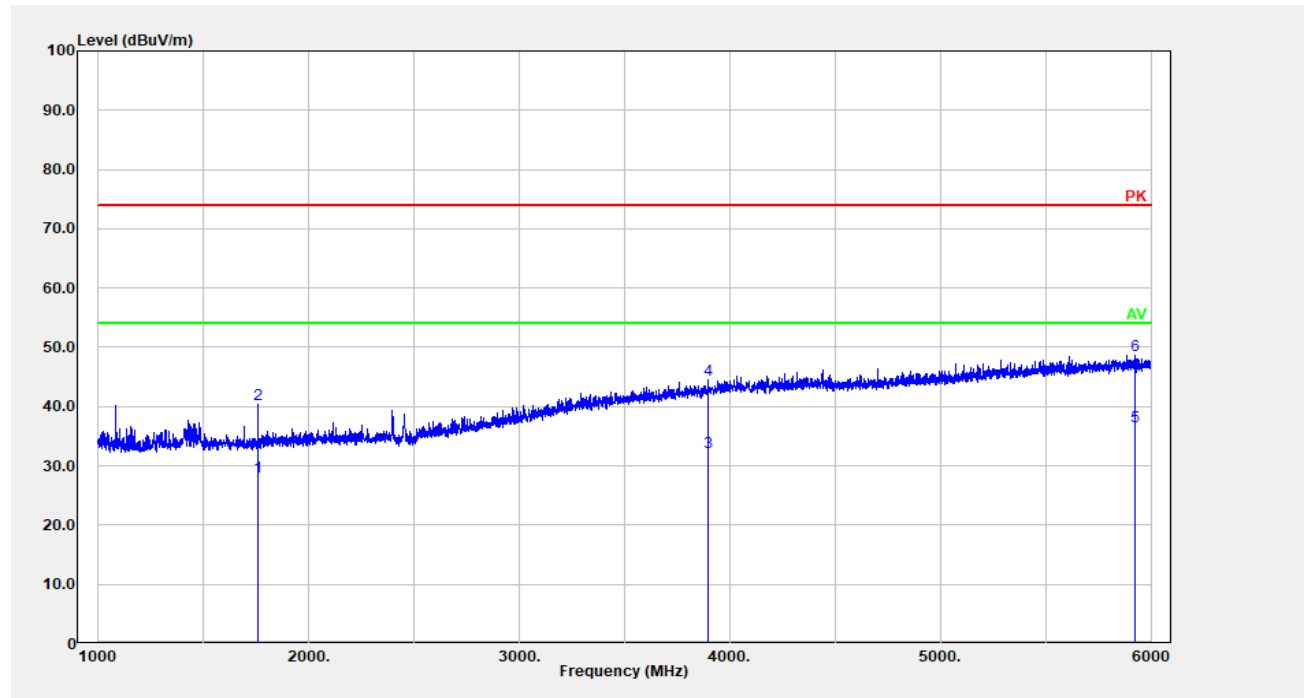


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	1759.152	27.08	1.18	28.26	54.00	25.74	Average
2	1759.152	39.17	1.18	40.36	74.00	33.64	Peak
3	3896.579	22.73	9.58	32.31	54.00	21.69	Average
4	3896.579	34.91	9.58	44.49	74.00	29.51	Peak
5	5922.984	23.29	13.28	36.57	54.00	17.43	Average
6	5922.984	35.38	13.28	48.67	74.00	25.33	Peak

Horizontal:

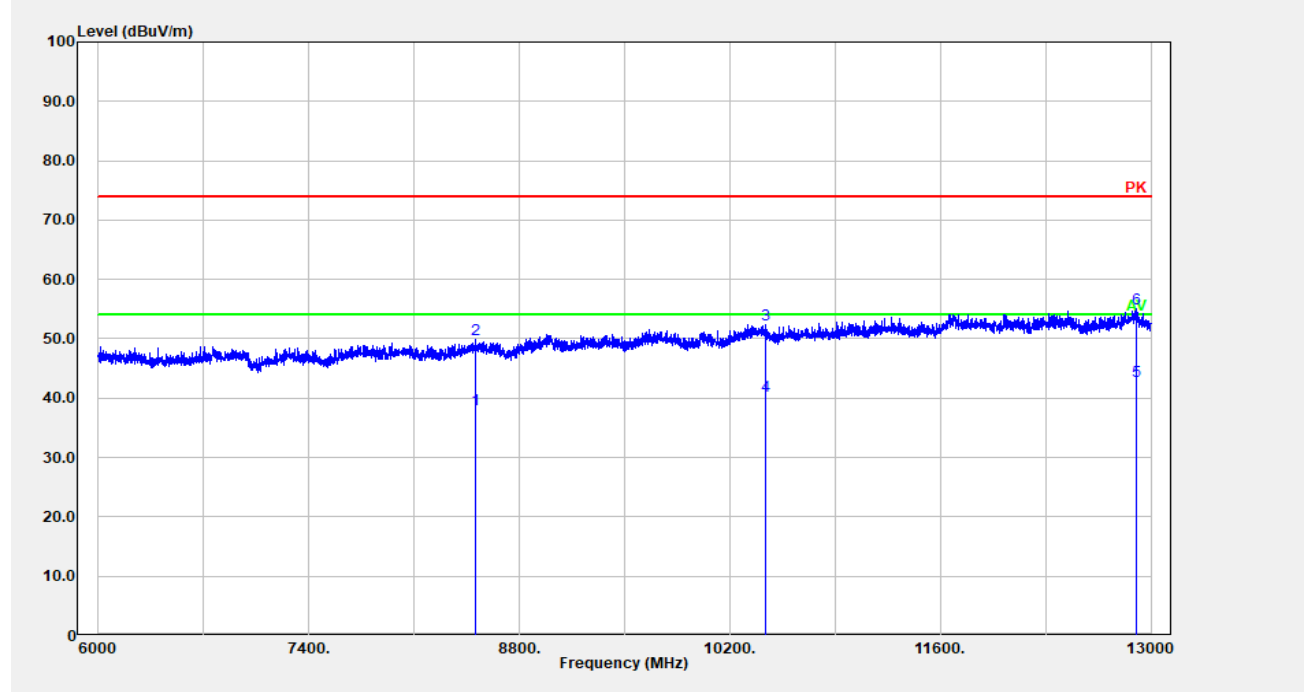

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	8507.901	21.58	16.45	38.03	54.00	15.97	Average
2	8507.901	33.37	16.45	49.83	74.00	24.17	Peak
3	10441.690	34.06	18.32	52.38	74.00	21.62	Peak
4	10441.690	22.15	18.32	40.47	54.00	13.53	Average
5	12904.780	21.39	21.56	42.95	54.00	11.05	Average
6	12904.780	33.46	21.56	55.01	74.00	18.99	Peak

Vertical:

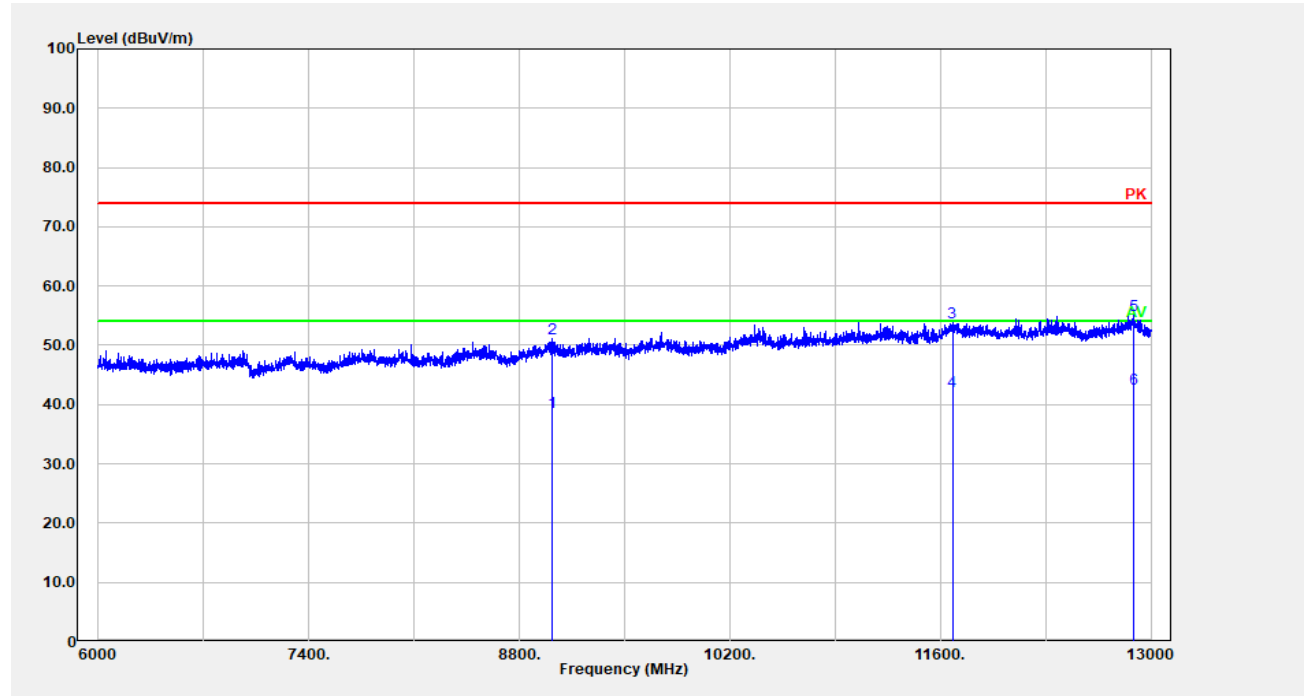

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	9016.203	21.64	17.16	38.80	54.00	15.20	Average
2	9016.203	33.91	17.16	51.08	74.00	22.92	Peak
3	11679.540	33.55	20.36	53.91	74.00	20.09	Peak
4	11679.540	21.80	20.36	42.16	54.00	11.84	Average
5	12887.980	33.55	21.49	55.04	74.00	18.96	Peak
6	12887.980	21.17	21.49	42.66	54.00	11.34	Average

==== END OF REPORT ====