

TEST REPORT

Applicant: AKUVOX (XIAMEN) NETWORKS CO., LTD.

Address: 10/F, No.56 Guanri Road, Software Park II, Xiamen 361009, China

Product Name: HyPanel Lux


FCC ID: 2AHCR-RT61

Standard(s): 47 CFR Part 15, Subpart E(15.407)
ANSI C63.10-2013
KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

Report Number: XMDN231122-69423E-RF-00C

Report Date: 2024/6/3

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).



Reviewed By: Gavin Xu
Title: RF Engineer



Approved By: Ivan Cao
Title: EMC Manager

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

CONTENTS

DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 ACCESSORY INFORMATION	5
1.3 ANTENNA INFORMATION DETAIL▲	5
1.4 EQUIPMENT MODIFICATIONS	5
2. SUMMARY OF TEST RESULTS	6
3. DESCRIPTION OF TEST CONFIGURATION	7
3.1 OPERATION FREQUENCY DETAIL	7
3.2 EUT OPERATION CONDITION	8
3.3 SUPPORT EQUIPMENT LIST AND DETAILS	8
3.4 SUPPORT CABLE LIST AND DETAILS	8
3.5 BLOCK DIAGRAM OF TEST SETUP	9
3.6 TEST FACILITY	10
3.7 MEASUREMENT UNCERTAINTY	10
4. REQUIREMENTS AND TEST PROCEDURES	11
4.1 AC LINE CONDUCTED EMISSIONS	11
4.1.1 Applicable Standard	11
4.1.2 EUT Setup	12
4.1.3 EMI Test Receiver Setup	12
4.1.4 Test Procedure	13
4.1.5 Corrected Amplitude & Margin Calculation	13
4.1.6 Test Result	13
4.2 RADIATION SPURIOUS EMISSIONS	14
4.2.1 Applicable Standard	14
4.2.2 EUT Setup	15
4.2.3 EMI Test Receiver & Spectrum Analyzer Setup	16
4.2.4 Test Procedure	17
4.2.5 Corrected Result & Margin Calculation	17
4.2.6 Test Result	17
4.3 EMISSION BANDWIDTH	18
4.3.1 Applicable Standard	18
4.3.2 EUT Setup	18
4.3.3 Test Procedure	18
4.3.4 Test Result	19
4.4 MAXIMUM CONDUCTED OUTPUT POWER	20
4.4.1 Applicable Standard	20
4.4.2 EUT Setup	20
4.4.3 Test Procedure	20
4.4.4 Test Result	20
4.5 MAXIMUM POWER SPECTRAL DENSITY	21

4.5.1 Applicable Standard 21

4.5.2 EUT Setup 21

4.5.3 Test Procedure 22

4.5.4 Test Result 22

4.6 DUTY CYCLE 23

4.6.1 EUT Setup 23

4.6.2 Test Procedure 23

4.6.3 Judgment 23

4.7 ANTENNA REQUIREMENT 24

4.7.1 Applicable Standard 24

4.7.2 Judgment 24

5. Test DATA AND RESULTS 25

5.1 AC LINE CONDUCTED EMISSIONS 25

5.2 RADIATION SPURIOUS EMISSIONS 28

5.3 EMISSION BANDWIDTH 100

5.4 99% OCCUPIED BANDWIDTH 111

5.5 MAXIMUM CONDUCTED OUTPUT POWER 122

5.6 MAXIMUM POWER SPECTRAL DENSITY 125

5.7 DUTY CYCLE 137

APPENDIX A - EUT PHOTOGRAPHS 139

APPENDIX B - TEST SETUP PHOTOGRAPHS 140

APPENDIX C - RF EXPOSURE EVALUATION 141

MAXIMUM PERMISSIBLE EXPOSURE (MPE) 141

Applicable Standard 141

Calculation formula: 141

Calculated Data: 142

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	XMDN231122-69423E-RF-00C	Original Report	2024/6/3

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	HyPanel Lux
EUT Model:	RT61
Equipment Type:	Client
Operation Frequency:	5180-5240 MHz (802.11a/n ht20/ac vht20) 5190-5230 MHz(802.11n ht40/ac vht40) 5210 MHz(802.11ac vht80) 5260-5320 MHz (802.11a/n ht20/ac vht20) 5270-5310 MHz(802.11n ht40/ac vht40) 5290 MHz(802.11ac vht80) 5500-5720 MHz (802.11a/n ht20/ac vht20) 5510-5710 MHz(802.11n ht40/ac vht40) 5530-5690MHz(802.11ac vht80) 5745-5825 MHz (802.11a/n ht20/ac vht20) 5755-5795 MHz(802.11n ht40/ac vht40) 5775 MHz(802.11ac vht80)
Maximum Average Output Power (Conducted):	16.06 dBm in 5150-5250 MHz Band 15.74 dBm in 5250-5350 MHz Band 9.7 dBm in 5470-5725 MHz Band 16.29 dBm in 5725-5850 MHz Band
Modulation Type:	802.11a/n/ac:OFDM-BPSK, QPSK, 16QAM, 64QAM,256QAM
Rated Input Voltage:	12V
Serial Number:	2EB1-3(Radiated Spurious Emission/AC Line Conducted Emission Test) 2EB1-1(RF Conducted Test)
EUT Received Date:	2023/12/16
EUT Received Status:	Good

1.2 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
/	/	/	/

1.3 Antenna Information Detail ▲

Manufacturer	Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
Word Easy Electronics Co.,Ltd.	FPC	50	5.15~5.25GHz	3.4 dBi
			5.25~5.35GHz	3.5 dBi
			5.47~5.725GHz	3.4 dBi
			5.725-5.85GHz	3.8 dBi
The design of compliance with §15.203:				
<input checked="" type="checkbox"/> Unit uses a permanently attached antenna.				
<input type="checkbox"/> Unit uses a unique coupling to the intentional radiator.				
<input type="checkbox"/> Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.				

1.4 Equipment Modifications

No modifications are made to the EUT during all test items.

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
§15.207(a)	AC line conducted emissions	Compliant
FCC§15.205& §15.209 &§15.407(b)	Radiated Spurious Emissions	Compliant
FCC§15.407(a) (e)	Emission Bandwidth	Compliant
FCC§15.407(a)	Maximum Conducted Output Power	Compliant
FCC§15.407 (a)	Power Spectral Density	Compliant
§15.203	Antenna Requirement	Compliant
<p>Note 1: For AC line conducted emissions, the maximum output power mode and channel was tested.</p> <p>Note 2: For Radiated Spurious Emissions 9kHz~ 1GHz and 18-40GHz, the maximum output power mode and channel was tested.</p> <p>Note 3: The system support 802.11a/n ht20/n ht40/ac vht20 /ac vht40 /ac vht80, modes 802.11ac vht20/vht40 reduced since the identical parameters with 802.11n ht20 and ht40.</p>		

3. DESCRIPTION OF TEST CONFIGURATION

3.1 Operation Frequency Detail

For 802.11a/n ht20/ac vht20:

5150-5250MHz Band		5250-5350 MHz Band		5470-5725 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
40	5200	56	5280	104	5520	153	5765
44	5220	60	5300	108	5540	157	5785
48	5240	64	5320	112	5560	161	5805
/	/	/	/	116	5580	165	5825
/	/	/	/	120	5600	/	/
/	/	/	/	124	5620	/	/
/	/	/	/	128	5640	/	/
/	/	/	/	132	5660	/	/
/	/	/	/	136	5680	/	/
/	/	/	/	140	5700	/	/
/	/	/	/	144	5720 ^{Note}	/	/

For 802.11n ht40/ac vht40:

5150-5250MHz Band		5250-5350 MHz Band		5470-5725 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
46	5230	62	5310	110	5550	159	5795
		/	/	118	5590		
		/	/	126	5630		
/	/	/	/	134	5670	/	/
/	/	/	/	142	5710 ^{Note}	/	/

For 802.11ac vht80:

5150-5250MHz Band		5250-5350 MHz Band		5470-5725 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
/	/	/	/	122	5610	/	/
/	/	/	/	138	5690 ^{Note}	/	/

Note: Additional channels cross the band 5470-5725MHz and 5725-5850 MHz, Conducted output power/ Power Spectral Density/bandwidth test with the additional channel to compliance with stricter limit of the two bands(5470-5725MHz more stricter).

3.2 EUT Operation Condition

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

EUT Exercise Software:		QRCT3			
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer ▲ :					
5150-5250 MHz Band:					
Test Modes	Data Rate	Power Level Setting			
		Low Channel	Middle Channel	High Channel	
802.11a	6Mbps	19	19	19	
802.11n ht20	6Mbps	20	20	20	
802.11n ht40	MCS0	18	/	18	
802.11 ac80	MCS0	/	18	/	
5250-5350 MHz Band:					
Test Modes	Data Rate	Power Level Setting			
		Low Channel	Middle Channel	High Channel	
802.11a	6Mbps	20	20	20	
802.11n ht20	6Mbps	20	20	20	
802.11n ht40	MCS0	20	/	20	
802.11 ac80	MCS0	/	18	/	
5470-5725 MHz Band:					
Test Modes	Data Rate	Power Level Setting			
		Low Channel	Middle Channel	High Channel	Cross Channel
802.11a	6Mbps	14	14	14	14
802.11n ht20	6Mbps	14	14	14	14
802.11n ht40	MCS0	14	14	14	14
802.11 ac80	MCS0	18	/	18	18
5725-5850 MHz Band:					
Test Modes	Data Rate	Power Level Setting			
		Low Channel	Middle Channel	High Channel	
802.11a	6Mbps	30	30	20	
802.11n ht20	6Mbps	30	30	20	
802.11n ht40	MCS0	30	/	19	
802.11 ac80	MCS0	/	15	/	
Note:					
1. The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.					
2. The system support 802.11a/n ht20/n ht40/ac vht20/ac vht40/ ac vht80, the vht20/vht40 were reduced since the identical parameters with 802.11n ht20 and ht40.					

3.3 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
D-Link	Router	DGS-1100-08PD	S01Z1H000012
Hengxin electronic	Resistive Load	RX20-T1000W	EMZBRL21120401EN

3.4 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
RJ45 cable	Yes	Yes	3	EUT	Router
AC Cable*2	No	No	1	EUT	Resistive Load
AC Cable	No	No	1	LISN	EUT

3.5 Block Diagram of Test Setup

AC Power Lines Conducted Emission:

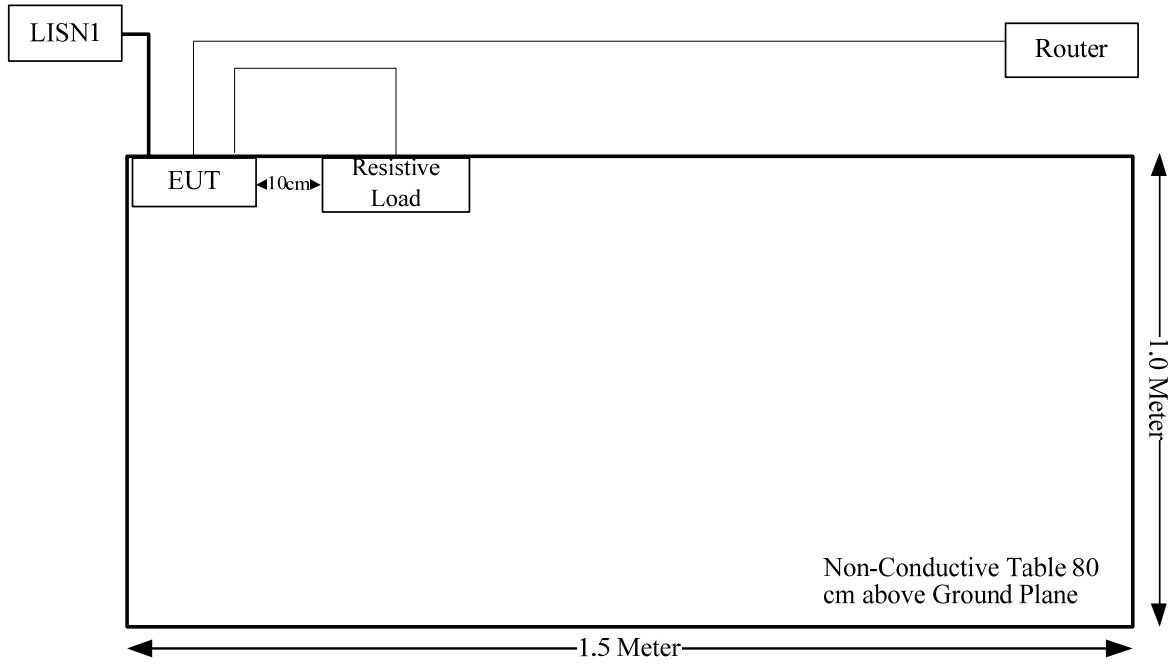

Radiated Spurious Emissions:

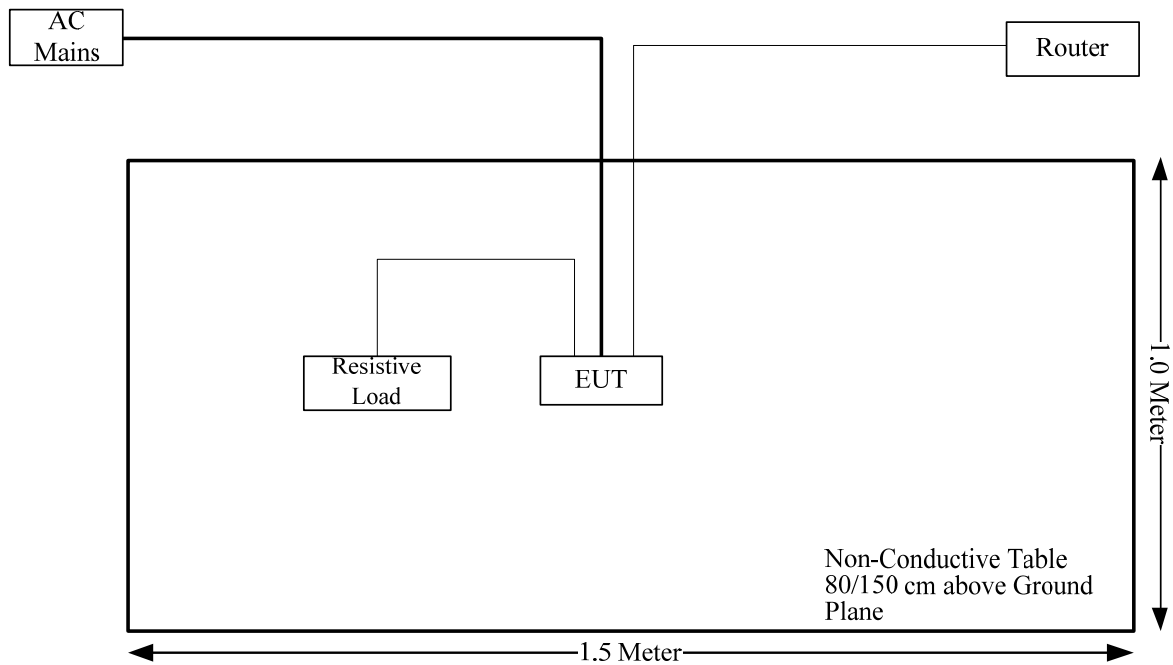

3.6 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

3.7 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	9kHz~30MHz: 3.3dB, 30MHz~200MHz: 4.55 dB, 200MHz~1GHz: 5.92 dB, 1GHz~6GHz: 4.98 dB, 6GHz~18GHz: 5.89 dB, 18GHz~26.5GHz:5.47 dB, 26.5GHz~40GHz:5.63 dB
Unwanted Emissions, conducted	±2.47 dB
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.11 dB (150 kHz to 30 MHz)

4. REQUIREMENTS AND TEST PROCEDURES

4.1 AC Line Conducted Emissions

4.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

4.1.2 EUT Setup

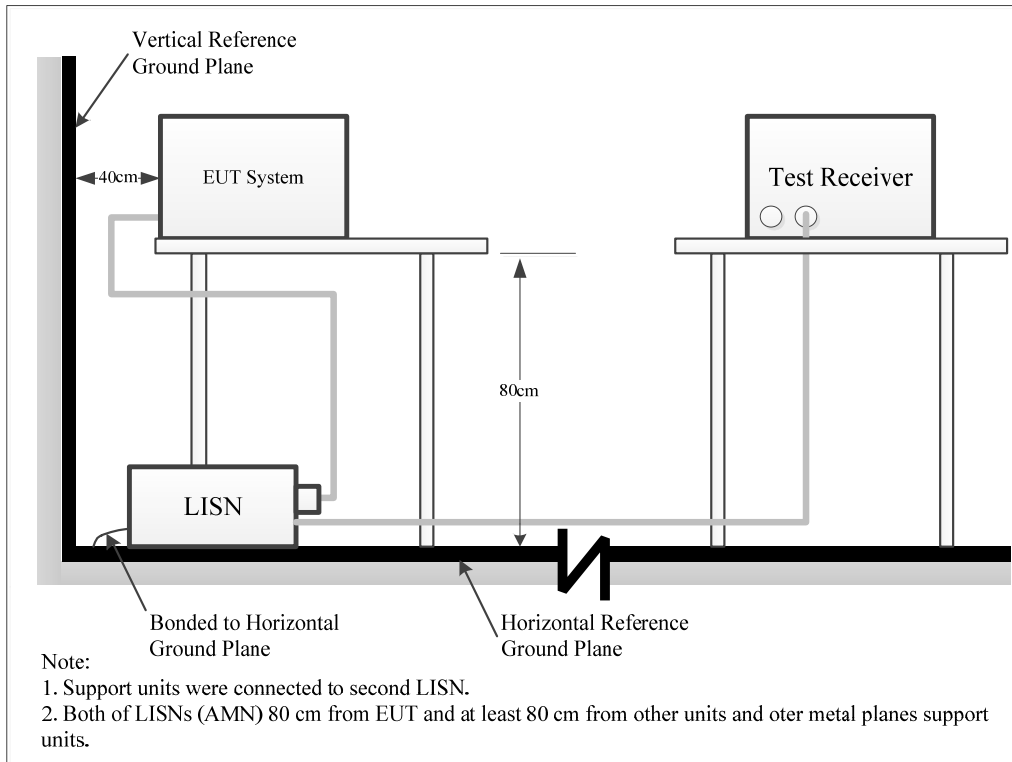

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

4.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

4.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

4.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.1.6 Test Result

Please refer to section 5.1.

4.2 Radiation Spurious Emissions

4.2.1 Applicable Standard


FCC §15.407 (b);

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:


- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.
 - (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.
 - (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.
 - (4) For transmitters operating solely in the 5.725-5.850 GHz band:
 - (i) All emissions shall be limited to a level of - 27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.
 - (8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
 - (9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.
 - (10) The provisions of § 15.205 apply to intentional radiators operating under this section.
 - (11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.
- (c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

4.2.2 EUT Setup


9kHz~30MHz:

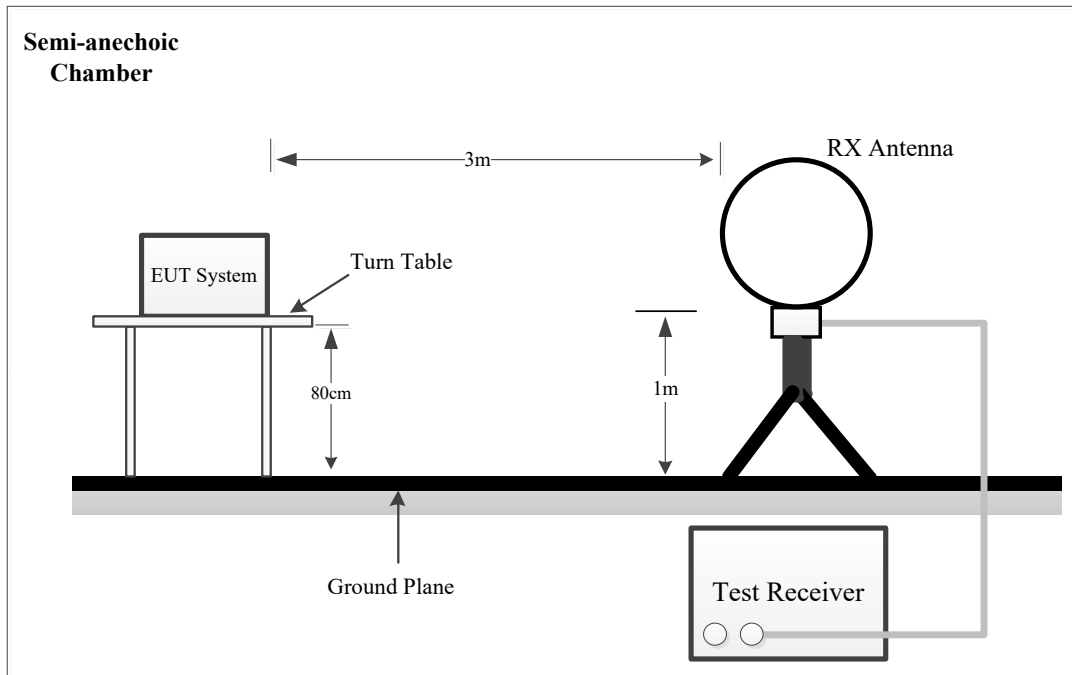

30MHz~1GHz:

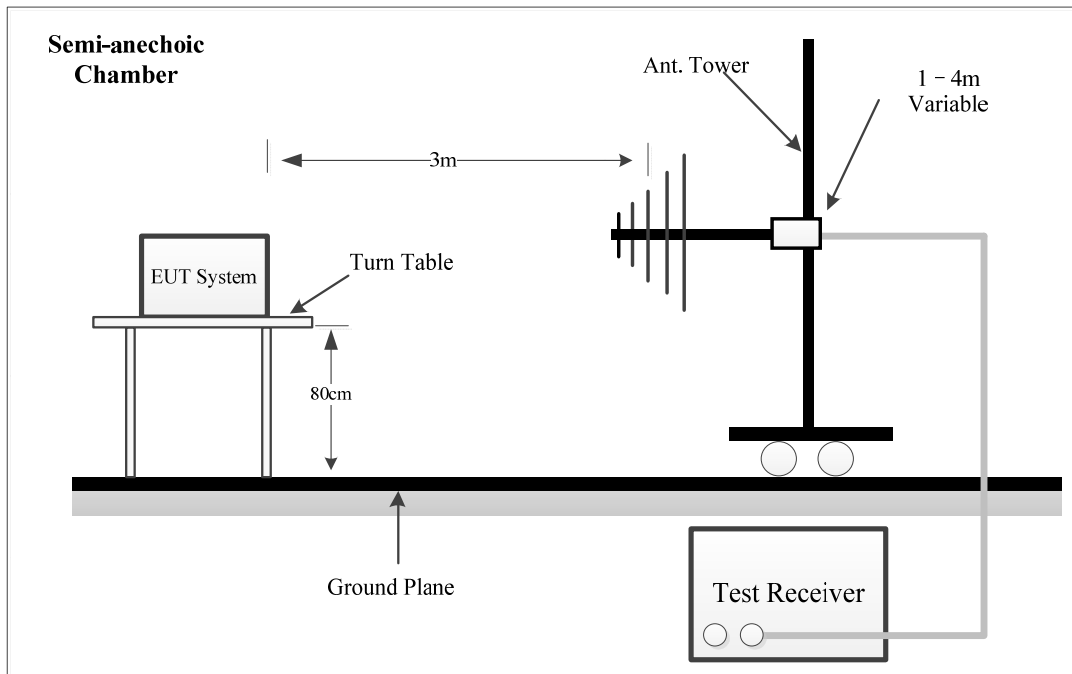

Above 1GHz:

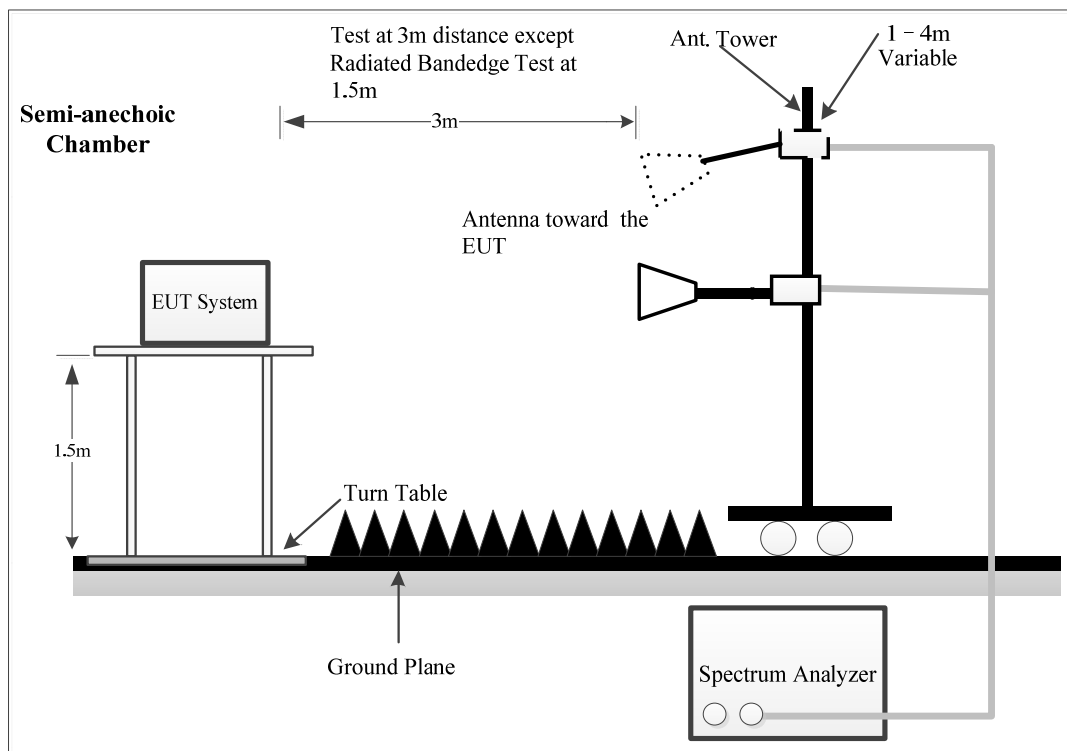

The radiated emission tests were performed in the semi-anechoic chamber, using the setup accordance with the ANSI C63.10-2013. The specification used was FCC 15.209, FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

4.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz-1000MHz:

Frequency Range	Measurement	RBW	Video B/W	IF B/W
9 kHz – 150 kHz	QP/AV	200 Hz	1 kHz	200 Hz
150 kHz – 30 MHz	QP/AV	9 kHz	30 kHz	9 kHz
30 MHz – 1000 MHz	PK	100 kHz	300 kHz	/
	QP	/	/	120 kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	≥1/T

Note: T is minimum transmission duration

If the maximized peak measured value is under the QP limit by more than 6dB, then it is unnecessary to perform an QP measurement.

If the maximized peak measured value is under the average limit, then it is unnecessary to perform an QP measurement.

4.2.4 Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz -1 GHz, except 9-90 kHz, 110-490 kHz, employing an average detector, peak and Average detection modes for frequencies above 1 GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

For Radiated Bandedge test, which was performed at 1.5 m distance, according to C63.10, the test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m

Distance extrapolation Factor = $20 \log (\text{specific distance } [3m]/\text{test distance } [1.5m])$ dB= 6.0 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

4.2.5 Corrected Result & Margin Calculation

The basic equation except radiated bandedge test is as follows:

Factor = Antenna Factor + Cable Loss- Amplifier Gain

Result = Reading + Factor

For Radiated Bandedge test:

Factor = Antenna Factor + Cable Loss

Result = Reading + Factor-Distance extrapolation Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.2.6 Test Result

Please refer to section 5.2.

4.3 Emission Bandwidth

4.3.1 Applicable Standard


FCC §15.407 (a),(h)

(h)(2) Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

FCC §15.407 (e)

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

4.3.2 EUT Setup

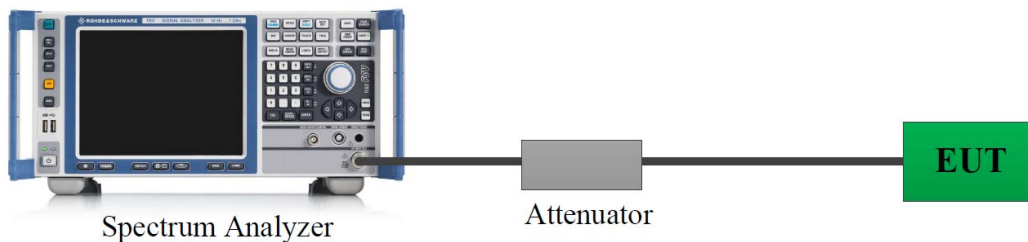

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer.

4.3.3 Test Procedure

26dB Emission Bandwidth:

According to ANSI C63.10-2013 Section 12.4.1

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max hold
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

6 dB emission bandwidth:

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) ≥ 3 RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

99% Occupied Bandwidth:

According to ANSI C63.10-2013 Section 12.4.2&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.

b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.

c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.

d) Step a) through step c) might require iteration to adjust within the specified range.

e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.

f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.

g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.

h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

4.3.4 Test Result

Please refer to section 5.3 and section 5.4.

4.4 Maximum Conducted Output Power

4.4.1 Applicable Standard

FCC §15.407(a) (1)(i)

For an outdoor access point operating in the band 5.15– 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30degrees as measured from the horizon must not exceed 125 mW (21 dBm).


FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

4.4.2 EUT Setup



A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The cable loss of this RF cable was offset into the setting of test equipment, which was provided by manufacturer ▲.

4.4.3 Test Procedure

According to ANSI C63.10-2013 Section 12.3.3.1

Method PM-G is measurement using a gated RF average power meter.

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

4.4.4 Test Result

Please refer to section 5.5.

4.5 Maximum Power Spectral Density

4.5.1 Applicable Standard

FCC §15.407(a) (1)(i)

For an outdoor access point operating in the band 5.15– 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30degrees as measured from the horizon must not exceed 125 mW (21 dBm).


FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

4.5.2 EUT Setup

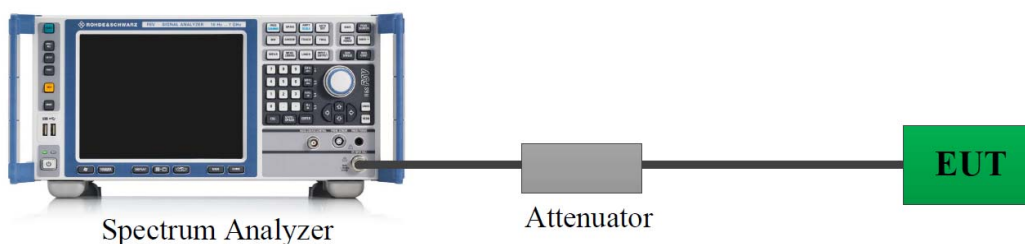

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The cable loss of this RF cable was offset into the setting of test equipment, which was provided by manufacturer ▲.

4.5.3 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Duty cycle $\geq 98\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 should be applied.

Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 should be applied.

Duty cycle $< 98\%$, duty cycle variations exceed $\pm 2\%$


KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-3 should be applied.

4.5.4 Test Result

Please refer to section 5.6.

4.6 Duty Cycle

4.6.1 EUT Setup

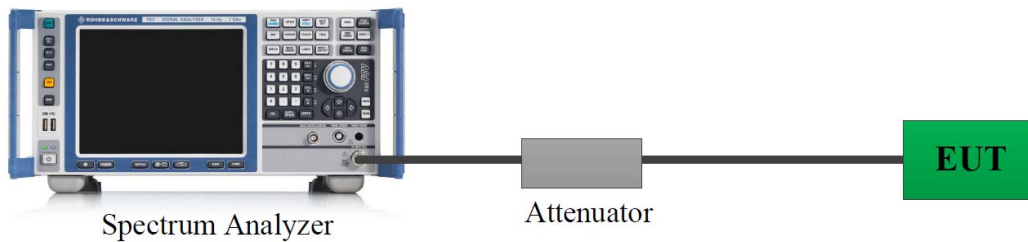

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer.

4.6.2 Test Procedure

According to ANSI C63.10-2013 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

4.6.3 Judgment

Report Only. Please refer to section 5.7.

4.7 Antenna Requirement

4.7.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.7.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.3.

5. Test DATA AND RESULTS

5.1 AC Line Conducted Emissions

Serial Number:	2EB1-3	Test Date:	2024/3/12
Test Site:	CE	Test Mode:	Transmitting
Tester:	Wright Lai	Test Result:	Pass

Environmental Conditions:


Temperature: (°C)	19.4	Relative Humidity: (%)	65	ATM Pressure: (kPa)	101.3
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101614	2023/10/18	2024/10/17
MICRO-COAX	Coaxial Cable	C-NJNJ-50	C-0200-01	2023/9/5	2024/9/4
R&S	EMI Test Receiver	ESCI	100035	2023/8/18	2024/8/17
R&S	Test Software	EMC32	V9.10.00	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Project No: XMDN231122-69423E-RF
 Test Engineer: Wright Lai
 Test Date: 2024-3-12
 Port: L
 Test Mode: Transmitting
 Power Source: AC 120V/60Hz
 Note: 802.11n ht20 5785MHz

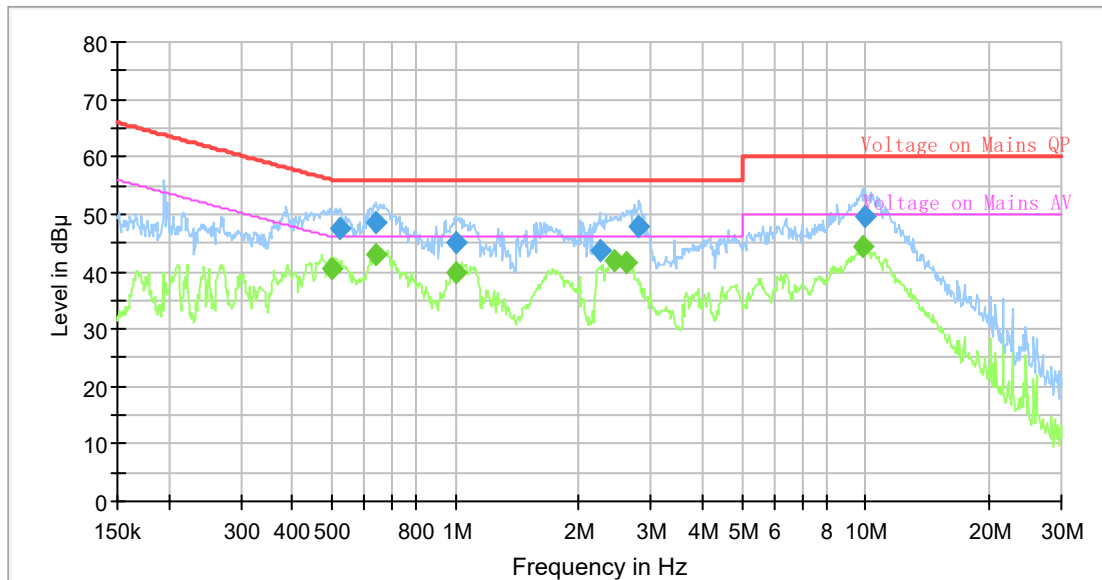

Final Result

Frequency (MHz)	QuasiPeak (dB μV)	Average (dB μV)	Limit (dB μV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.501508	---	40.56	46.00	5.44	9.000	L1	9.7
0.524533	47.38	---	56.00	8.62	9.000	L1	9.7
0.643549	---	42.84	46.00	3.16	9.000	L1	9.7
0.643549	48.55	---	56.00	7.45	9.000	L1	9.7
1.003138	45.22	---	56.00	10.78	9.000	L1	9.8
1.008154	---	39.89	46.00	6.11	9.000	L1	9.8
2.250416	43.60	---	56.00	12.40	9.000	L1	9.7
2.449547	---	41.79	46.00	4.21	9.000	L1	9.7
2.626701	---	41.73	46.00	4.27	9.000	L1	9.7
2.802654	47.82	---	56.00	8.18	9.000	L1	9.7
9.898813	---	44.53	50.00	5.47	9.000	L1	9.9
9.998049	49.70	---	60.00	10.30	9.000	L1	9.9

Project No: XMDN231122-69423E-RF
 Test Engineer: Wright Lai
 Test Date: 2024-3-12
 Port: N
 Test Mode: Transmitting
 Power Source: AC 120V/60Hz
 Note: 802.11n ht20 5785MHz

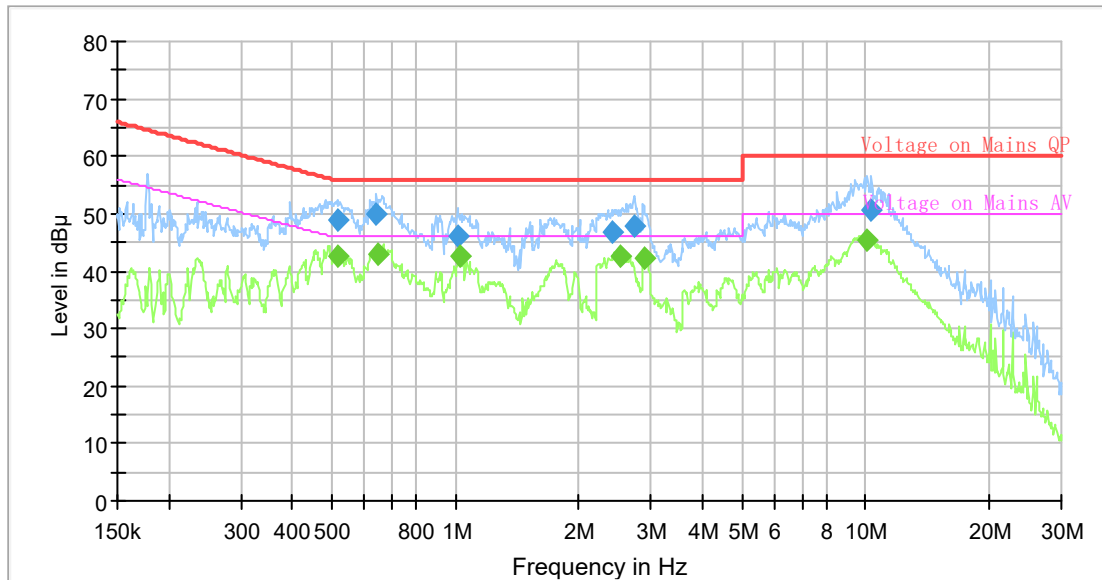

Final Result

Frequency (MHz)	QuasiPeak (dB μV)	Average (dB μV)	Limit (dB μV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.514172	48.86	---	56.00	7.14	9.000	N	9.7
0.514172	---	42.79	46.00	3.21	9.000	N	9.7
0.643549	50.06	---	56.00	5.94	9.000	N	9.6
0.650000	---	42.97	46.00	3.03	9.000	N	9.6
1.013195	46.04	---	56.00	9.96	9.000	N	9.7
1.028469	---	42.68	46.00	3.32	9.000	N	9.7
2.413169	46.67	---	56.00	9.33	9.000	N	9.6
2.536578	---	42.53	46.00	3.47	9.000	N	9.6
2.720027	47.94	---	56.00	8.06	9.000	N	9.6
2.902231	---	42.35	46.00	3.65	9.000	N	9.7
10.098279	---	45.56	50.00	4.44	9.000	N	9.9
10.353274	50.82	---	60.00	9.18	9.000	N	9.8

5.2 Radiation Spurious Emissions

Serial Number:	2EB1-3	Test Date:	Below 1GHz: 2024/1/12 Above 1GHz: 2024/2/6~2024/5/31
Test Site:	Chamber 10m, Chamber B	Test Mode:	Transmitting
Tester:	Leesin Xiang, Colin Yang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	21~23.5	Relative Humidity: (%)	46~62	ATM Pressure: (kPa)	100.8~101.4
----------------------	---------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
9kHz~1000MHz					
EMCO	Passive Loop Antenna	6512	9706-1206	2023/10/21	2024/10/20
Sunol Sciences	Hybrid Antenna	JB3	A060611-1	2023/9/6	2024/9/5
Narda	Attenuator	779-6dB	04269	2023/9/6	2024/9/5
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2023/8/1	2024/7/31
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-04	2023/8/1	2024/7/31
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2023/8/1	2024/7/31
Sonoma	Amplifier	310N	185914	2023/8/1	2024/7/31
R&S	EMI Test Receiver	ESCI	100224	2023/8/18	2024/8/17
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Above 1GHz					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2024/9/6
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2023/2/22	2026/2/21
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2023/2/22	2026/2/21
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004 #0001	2023/11/17	2024/11/16
Xinhang Macrowave	Coaxial Cable	XH360A-2.92/J-2.92/J-6M-A	20231208001 #0001	2023/12/11	2024/12/10
AH	Preamplifier	PAM-0118P	469	2023/8/19	2024/8/18
AH	Preamplifier	PAM-1840VH	191	2023/9/7	2024/9/6
R&S	Spectrum Analyzer	FSV40	101944	2023/10/18	2024/10/17
Sinoscite	Band Rejection Filter	BSF5150-5850MN	0899003	2023/6/16	2024/6/15
Mini-Circuits	High-Pass Filter	VHF-6010+	31119	2023/12/1	2024/11/30
Audix	Test Software	E3	191218 (V9)	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below table and plots.


1) 9kHz~30MHz

802.11n ht20 5785MHz was tested. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

2) 30MHz-1GHz


Project No: XMDN231122-69423E-RF
 Test Engineer: Leesin Xiang
 Test Date: 2024-1-12
 Polarization: Horizontal
 Test Mode: Transmitting
 Power Source: AC 120V/60Hz
 Note: 802.11n ht20 5785MHz

80.0 dBuV/m

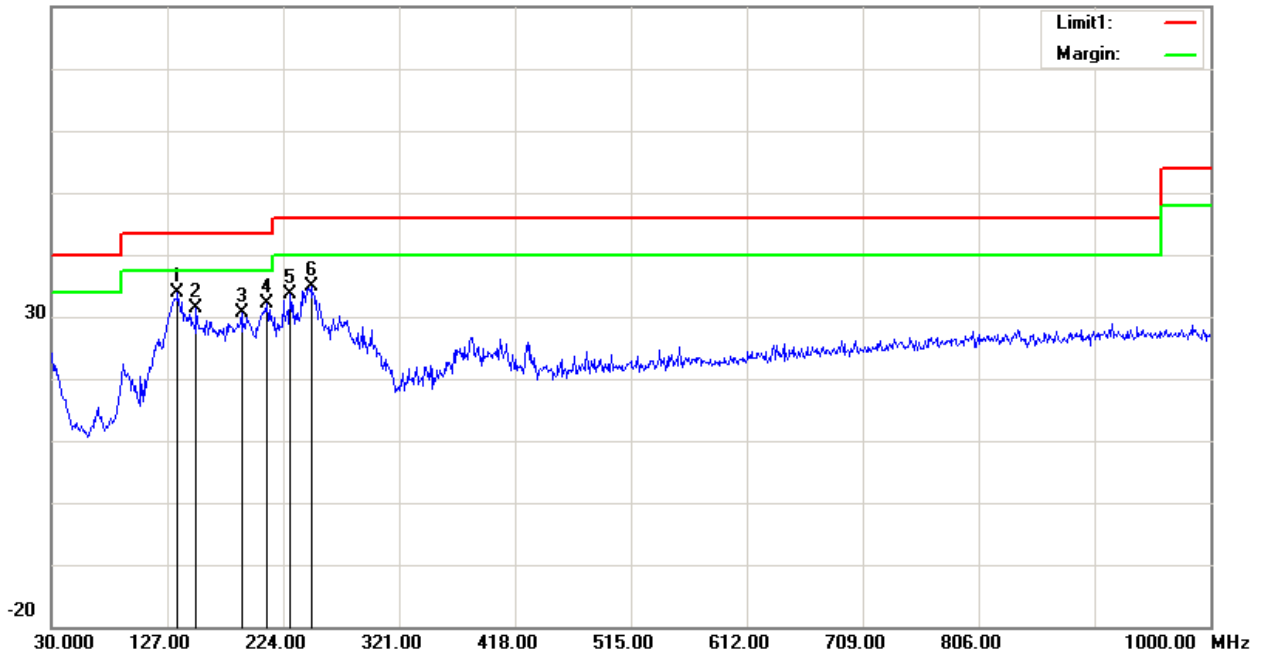

No.	Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	135.7300	43.89	peak	-10.10	33.79	43.50	9.71
2	151.2500	42.44	peak	-11.03	31.41	43.50	12.09
3	189.0800	42.92	peak	-12.19	30.73	43.50	12.77
4	210.4200	44.74	peak	-12.58	32.16	43.50	11.34
5	229.8200	45.78	peak	-12.23	33.55	46.00	12.45
6	247.2800	46.42	peak	-11.52	34.90	46.00	11.10

Project No: XMDN231122-69423E-RF
 Test Engineer: Leesin Xiang
 Test Date: 2024-1-12
 Polarization: Vertical
 Test Mode: Transmitting
 Power Source: AC 120V/60Hz
 Note: 802.11n ht20 5785MHz

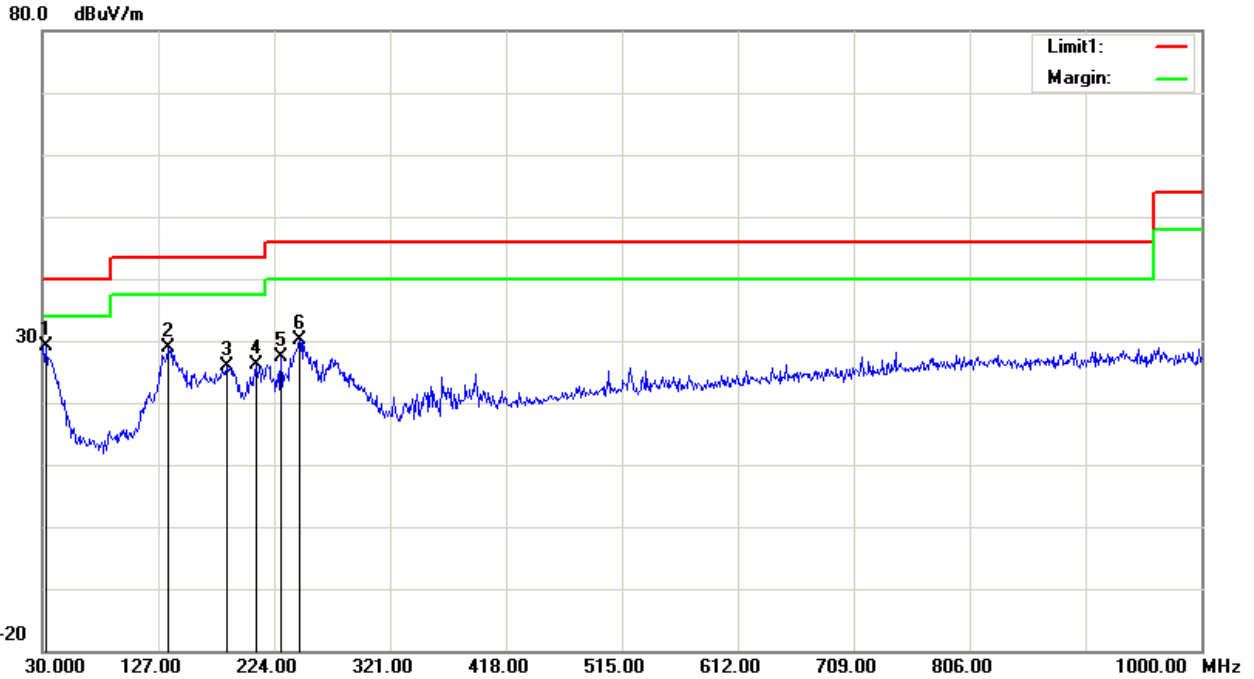


No.	Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	32.9100	34.67	peak	-5.47	29.20	40.00	10.80
2	135.7300	38.99	peak	-10.10	28.89	43.50	14.61
3	184.2300	38.21	peak	-12.40	25.81	43.50	17.69
4	209.4500	38.65	peak	-12.49	26.16	43.50	17.34
5	229.8200	39.66	peak	-12.23	27.43	46.00	18.57
6	245.3400	41.77	peak	-11.57	30.20	46.00	15.80

**3) 1-18GHz:
5150-5250MHz :**

802.11a mode, Low Channel, Horizontal		802.11a mode, Low Channel, Vertical																																																																																																																	
<p>Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3 Polarization: Horizontal Tester: Colin Yang Test Mode: Transmitting Note: 802.11a_U-NII-1_low channel 5180MHz</p> <p>Date: 2024-02-06</p>		<p>Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3 Polarization: Vertical Tester: Colin Yang Test Mode: Transmitting Note: 802.11a_U-NII-1_low channel 5180MHz</p> <p>Date: 2024-02-06</p>																																																																																																																	
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Result (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5107.82</td> <td>37.27</td> <td>-1.47</td> <td>35.80</td> <td>54.00</td> <td>18.20</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5107.82</td> <td>47.48</td> <td>-1.47</td> <td>46.01</td> <td>74.00</td> <td>27.99</td> <td>Peak</td> </tr> </tbody> </table>		No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	5107.82	37.27	-1.47	35.80	54.00	18.20	Average	2	5107.82	47.48	-1.47	46.01	74.00	27.99	Peak	<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Result (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5124.83</td> <td>37.04</td> <td>-1.33</td> <td>35.71</td> <td>54.00</td> <td>18.29</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5124.83</td> <td>47.56</td> <td>-1.33</td> <td>46.23</td> <td>74.00</td> <td>27.77</td> <td>Peak</td> </tr> </tbody> </table>		No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	5124.83	37.04	-1.33	35.71	54.00	18.29	Average	2	5124.83	47.56	-1.33	46.23	74.00	27.77	Peak																																																																
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																																																																																																												
1	5107.82	37.27	-1.47	35.80	54.00	18.20	Average																																																																																																												
2	5107.82	47.48	-1.47	46.01	74.00	27.99	Peak																																																																																																												
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																																																																																																												
1	5124.83	37.04	-1.33	35.71	54.00	18.29	Average																																																																																																												
2	5124.83	47.56	-1.33	46.23	74.00	27.77	Peak																																																																																																												
<p>Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3 Polarization: Horizontal Tester: Colin Yang Test Mode: Transmitting Note: 802.11a_U-NII-1_low channel 5180MHz</p> <p>Date: 2024-02-07</p>		<p>Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3 Polarization: Vertical Tester: Colin Yang Test Mode: Transmitting Note: 802.11a_U-NII-1_low channel 5180MHz</p> <p>Date: 2024-02-07</p>																																																																																																																	
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Result (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>45.96</td> <td>6.49</td> <td>52.45</td> <td>68.20</td> <td>15.75</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>44.52</td> <td>4.67</td> <td>49.19</td> <td>74.00</td> <td>24.81</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>15540.00</td> <td>35.51</td> <td>4.67</td> <td>40.18</td> <td>74.00</td> <td>33.82</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>17464.69</td> <td>44.59</td> <td>15.59</td> <td>60.18</td> <td>68.20</td> <td>8.02</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>17774.36</td> <td>40.67</td> <td>17.09</td> <td>57.76</td> <td>74.00</td> <td>16.24</td> <td>Peak</td> </tr> <tr> <td>6</td> <td>17774.36</td> <td>29.11</td> <td>17.09</td> <td>46.20</td> <td>54.00</td> <td>7.80</td> <td>Average</td> </tr> </tbody> </table>		No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10360.00	45.96	6.49	52.45	68.20	15.75	Peak	2	15540.00	44.52	4.67	49.19	74.00	24.81	Peak	3	15540.00	35.51	4.67	40.18	74.00	33.82	Peak	4	17464.69	44.59	15.59	60.18	68.20	8.02	Peak	5	17774.36	40.67	17.09	57.76	74.00	16.24	Peak	6	17774.36	29.11	17.09	46.20	54.00	7.80	Average	<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Result (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>45.64</td> <td>6.49</td> <td>52.13</td> <td>68.20</td> <td>16.07</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>35.61</td> <td>4.67</td> <td>40.28</td> <td>54.00</td> <td>13.72</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15540.00</td> <td>45.89</td> <td>4.67</td> <td>50.56</td> <td>74.00</td> <td>23.44</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>17421.48</td> <td>44.34</td> <td>15.25</td> <td>59.59</td> <td>68.20</td> <td>8.61</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>17747.95</td> <td>29.46</td> <td>16.94</td> <td>46.40</td> <td>54.00</td> <td>7.60</td> <td>Average</td> </tr> <tr> <td>6</td> <td>17747.95</td> <td>40.90</td> <td>16.94</td> <td>57.84</td> <td>74.00</td> <td>16.16</td> <td>Peak</td> </tr> </tbody> </table>		No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10360.00	45.64	6.49	52.13	68.20	16.07	Peak	2	15540.00	35.61	4.67	40.28	54.00	13.72	Average	3	15540.00	45.89	4.67	50.56	74.00	23.44	Peak	4	17421.48	44.34	15.25	59.59	68.20	8.61	Peak	5	17747.95	29.46	16.94	46.40	54.00	7.60	Average	6	17747.95	40.90	16.94	57.84	74.00	16.16	Peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																																																																																																												
1	10360.00	45.96	6.49	52.45	68.20	15.75	Peak																																																																																																												
2	15540.00	44.52	4.67	49.19	74.00	24.81	Peak																																																																																																												
3	15540.00	35.51	4.67	40.18	74.00	33.82	Peak																																																																																																												
4	17464.69	44.59	15.59	60.18	68.20	8.02	Peak																																																																																																												
5	17774.36	40.67	17.09	57.76	74.00	16.24	Peak																																																																																																												
6	17774.36	29.11	17.09	46.20	54.00	7.80	Average																																																																																																												
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																																																																																																												
1	10360.00	45.64	6.49	52.13	68.20	16.07	Peak																																																																																																												
2	15540.00	35.61	4.67	40.28	54.00	13.72	Average																																																																																																												
3	15540.00	45.89	4.67	50.56	74.00	23.44	Peak																																																																																																												
4	17421.48	44.34	15.25	59.59	68.20	8.61	Peak																																																																																																												
5	17747.95	29.46	16.94	46.40	54.00	7.60	Average																																																																																																												
6	17747.95	40.90	16.94	57.84	74.00	16.16	Peak																																																																																																												

802.11a mode, Low Channel, Bandedge, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-1_low channel 5180MHz

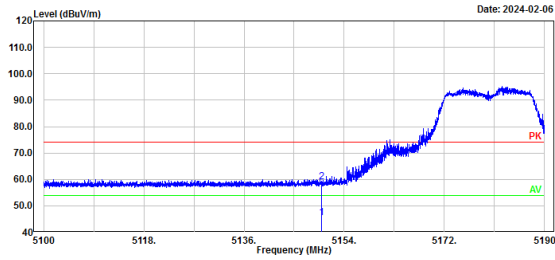

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5150.00	16.64	28.68	45.32	54.00	8.68	Average
2	5150.00	30.33	28.68	59.01	74.00	14.99	Peak

802.11a mode, Low Channel, Bandedge, Vertical


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-1_low channel 5180MHz

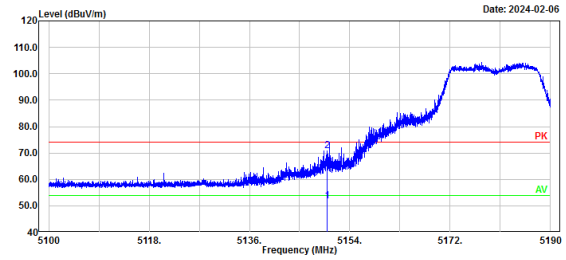

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5150.00	23.01	28.68	51.69	54.00	2.31	Average
2	5150.00	42.11	28.68	70.79	74.00	3.21	Peak

802.11a mode, Middle Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-1_middle channel 5200MHz

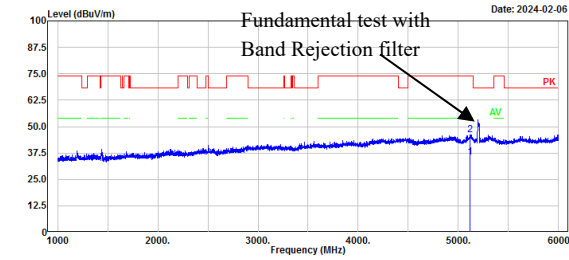

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5113.82	37.02	-1.41	35.61	54.00	18.39	Average
2	5113.82	47.62	-1.41	46.21	74.00	27.79	Peak


802.11a mode, Middle Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-1_middle channel 5200MHz

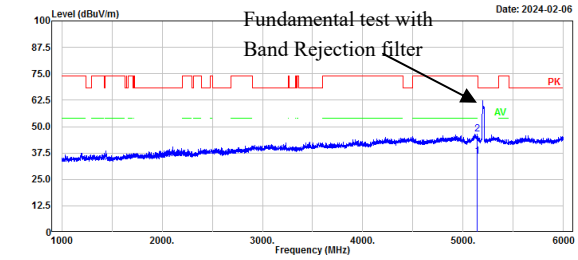


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5136.83	37.08	-1.22	35.86	54.00	18.14	Average
2	5136.83	47.46	-1.22	46.24	74.00	27.76	Peak

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-1_middle channel 5200MHz

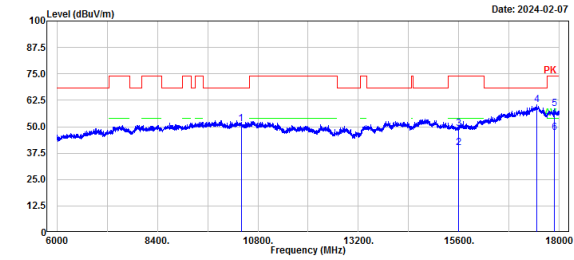

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	10400.00	45.04	6.44	51.48	68.20	16.72	Peak
2	15600.00	35.36	4.77	40.13	54.00	13.87	Average
3	15600.00	44.13	4.77	48.90	74.00	25.10	Peak
4	17455.09	44.68	15.51	60.19	68.20	8.01	Peak
5	17872.78	40.92	17.62	58.54	74.00	15.46	Peak
6	17872.78	29.68	17.62	47.30	54.00	6.70	Average


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-1_middle channel 5200MHz

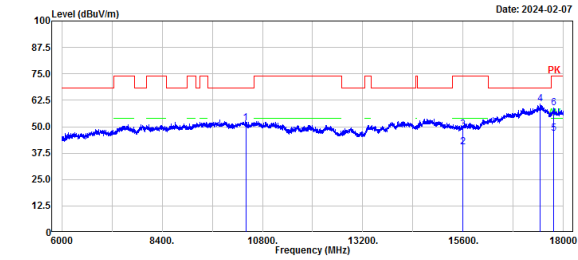

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	10400.00	45.14	6.44	51.58	68.20	16.62	Peak
2	15600.00	35.71	4.77	40.48	54.00	13.52	Average
3	15600.00	44.10	4.77	48.87	74.00	25.13	Peak
4	17445.49	45.41	15.44	60.85	68.20	7.35	Peak
5	17762.35	29.75	17.03	46.78	54.00	7.22	Average
6	17762.35	41.83	17.03	58.86	74.00	15.14	Peak

802.11a mode, High Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-1_high channel 5240MHz

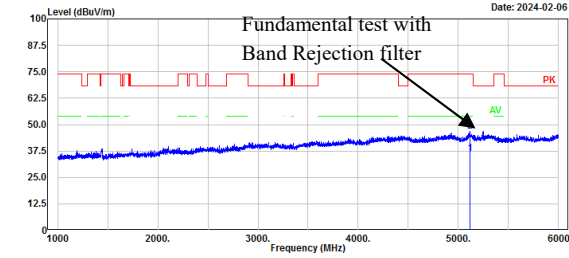

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5116.82	37.62	-1.39	36.23	54.00	17.77	Average
2	5116.82	48.29	-1.39	46.90	74.00	27.10	Peak


802.11a mode, High Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-1_high channel 5240MHz

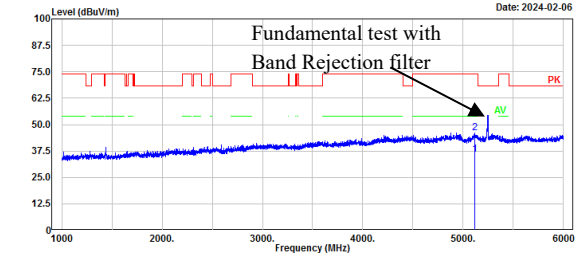


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5117.82	37.09	-1.39	35.70	54.00	18.30	Average
2	5117.82	47.43	-1.39	46.04	74.00	27.96	Peak

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-1_high channel 5240MHz

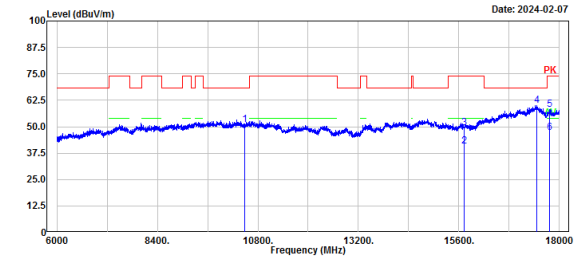

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10480.00	44.52	6.60	51.12	68.20	17.08	Peak
2	15720.00	35.65	5.05	40.70	54.00	13.30	Average
3	15720.00	44.31	5.05	49.36	74.00	24.64	Peak
4	17462.29	44.42	15.57	59.99	68.20	8.21	Peak
5	17771.96	41.15	17.08	58.23	74.00	15.77	Peak
6	17771.96	30.04	17.08	47.12	54.00	6.88	Average


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-1_high channel 5240MHz

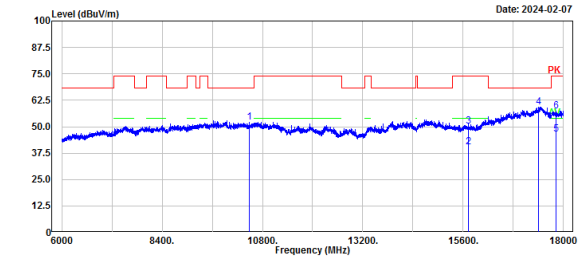

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10480.00	45.50	6.60	52.10	68.20	16.10	Peak
2	15720.00	35.36	5.05	40.41	54.00	13.59	Average
3	15720.00	45.09	5.05	50.14	74.00	23.86	Peak
4	17399.88	44.27	15.08	59.35	68.20	8.85	Peak
5	17817.56	29.14	17.34	46.48	54.00	7.52	Average
6	17817.56	39.93	17.34	57.27	74.00	16.73	Peak

802.11a mode, High Channel, Bandedge, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-1_high channel 5240MHz

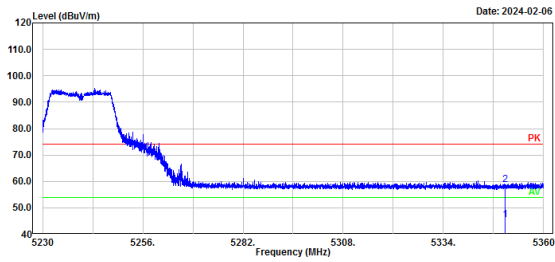

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.00	16.21	29.16	45.37	54.00	8.63	Average
2	5350.00	29.68	29.16	58.84	74.00	15.16	Peak

802.11a mode, High Channel, Bandedge, Vertical


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-1_high channel 5240MHz

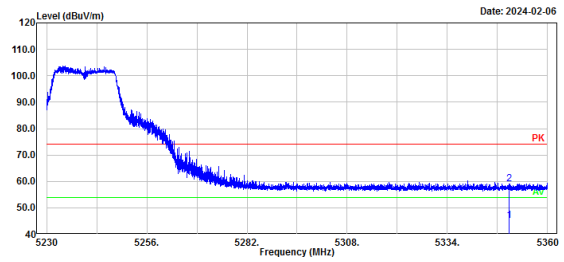

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.00	16.12	29.16	45.28	54.00	8.72	Average
2	5350.00	29.84	29.16	59.00	74.00	15.00	Peak

802.11n ht20 mode, Low Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-1_low channel 5180MHz

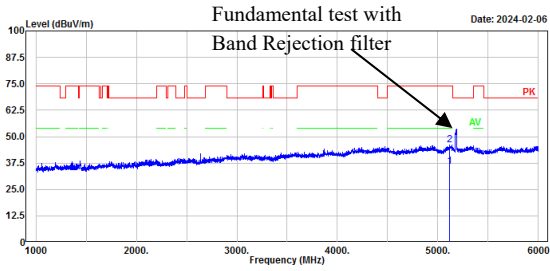

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5114.82	37.21	-1.41	35.80	54.00	18.20	Average
2	5114.82	47.35	-1.41	45.94	74.00	28.06	Peak


802.11n ht20 mode, Low Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-1_low channel 5180MHz

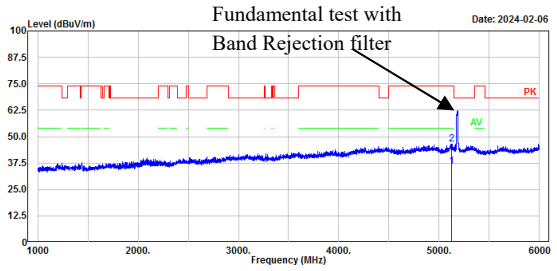


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5124.83	37.22	-1.33	35.89	54.00	18.11	Average
2	5124.83	47.82	-1.33	46.49	74.00	27.51	Peak

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-1_low channel 5180MHz

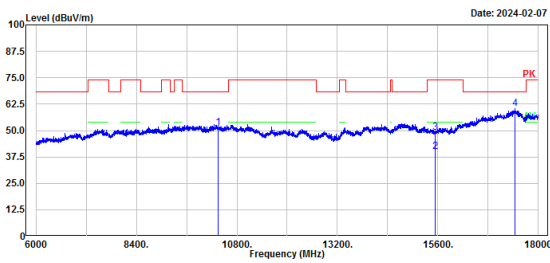

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10360.00	44.86	6.49	51.35	68.20	16.85	Peak
2	15540.00	35.37	4.67	40.04	54.00	13.96	Average
3	15540.00	44.37	4.67	49.04	74.00	24.96	Peak
4	17433.49	45.17	15.34	60.51	68.20	7.69	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-1_low channel 5180MHz

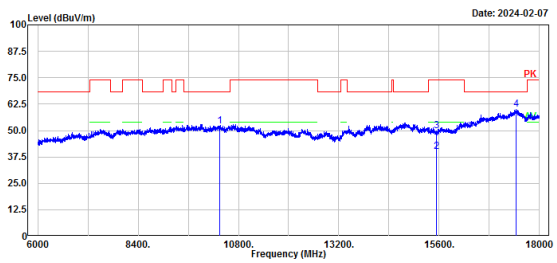

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10360.00	45.43	6.49	51.92	68.20	16.28	Peak
2	15540.00	35.35	4.67	40.02	54.00	13.98	Average
3	15540.00	45.23	4.67	49.90	74.00	24.10	Peak
4	17445.49	44.48	15.44	59.92	68.20	8.28	Peak

802.11n ht20 mode, Low Channel, Bandedge, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-1_low channel 5180MHz

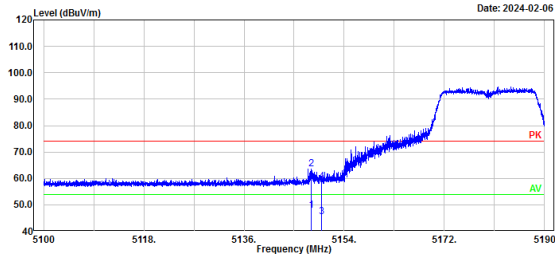

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5148.03	19.21	28.68	47.89	54.00	6.11	Average
2	5148.03	34.86	28.68	63.54	74.00	10.46	Peak
3	5150.00	16.85	28.68	45.53	54.00	8.47	Average
4	5150.00	30.05	28.68	58.73	74.00	15.27	Peak

802.11n ht20 mode, Low Channel, Bandedge, Vertical


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-1_low channel 5180MHz

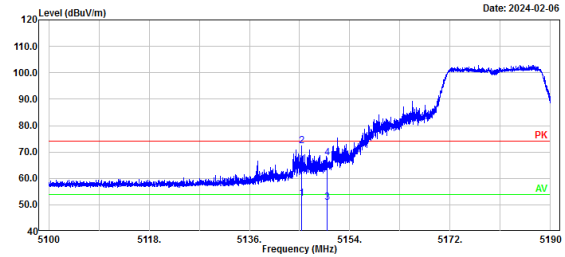

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5145.33	23.63	28.67	52.30	54.00	1.70	Average
2	5145.33	43.59	28.67	72.26	74.00	1.74	Peak
3	5150.00	22.26	28.68	50.94	54.00	3.06	Average
4	5150.00	39.22	28.68	67.90	74.00	6.10	Peak

802.11n ht20 mode, Middle Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-1_middle channel 5200MHz

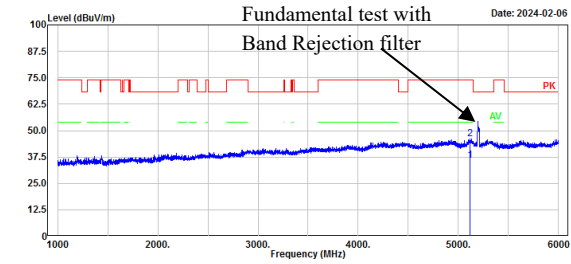

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5115.82	37.28	-1.40	35.88	54.00	18.12	Average
2	5115.82	47.38	-1.40	45.98	74.00	28.02	Peak


802.11n ht20 mode, Middle Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-1_middle channel 5200MHz

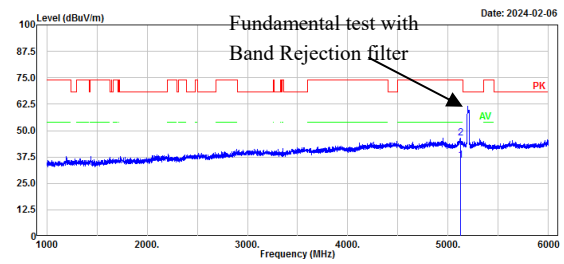


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5124.83	37.33	-1.33	36.00	54.00	18.00	Average
2	5124.83	47.91	-1.33	46.58	74.00	27.42	Peak

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-1_middle channel 5200MHz

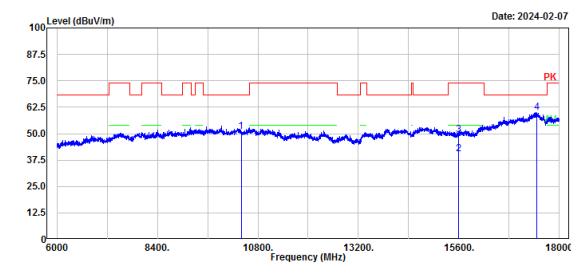

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10400.00	44.41	6.44	50.85	68.20	17.35	Peak
2	15600.00	35.48	4.77	40.25	54.00	13.75	Average
3	15600.00	44.75	4.77	49.52	74.00	24.48	Peak
4	17455.09	44.52	15.51	60.03	68.20	8.17	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-1_middle channel 5200MHz

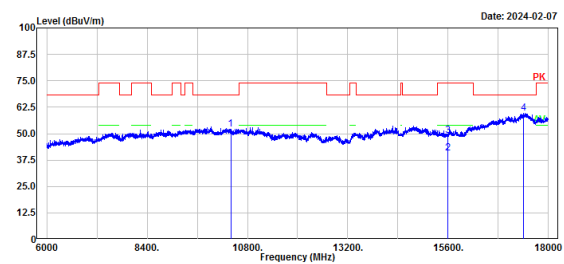

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10400.00	45.52	6.44	51.96	68.20	16.24	Peak
2	15600.00	35.84	4.77	40.61	54.00	13.39	Average
3	15600.00	44.31	4.77	49.08	74.00	24.92	Peak
4	17399.88	44.46	15.08	59.54	68.20	8.66	Peak

802.11n ht20 mode, High Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-1_high channel 5240MHz

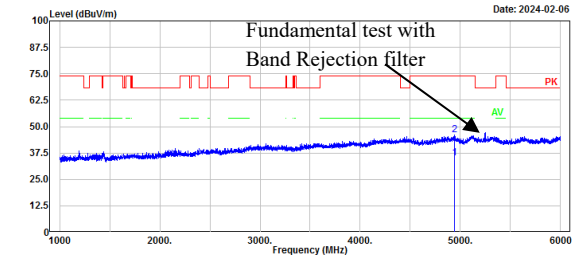

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4941.79	37.48	-2.45	35.03	54.00	18.97	Average
2	4941.79	48.48	-2.45	46.03	74.00	27.97	Peak


802.11n ht20 mode, High Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-1_high channel 5240MHz

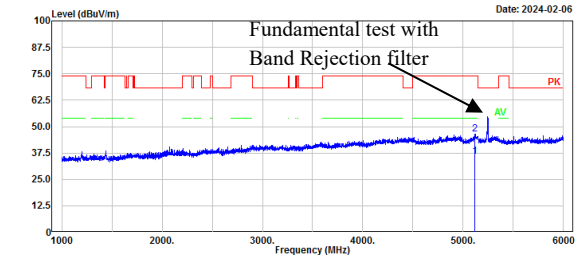


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5113.82	37.22	-1.41	35.81	54.00	18.19	Average
2	5113.82	47.86	-1.41	46.45	74.00	27.55	Peak

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-1_high channel 5240MHz

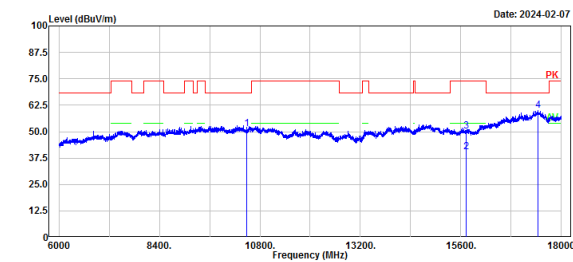

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	10480.00	44.57	6.60	51.17	68.20	17.03	Peak
2	15720.00	35.44	5.05	40.49	54.00	13.51	Average
3	15720.00	45.13	5.05	50.18	74.00	23.82	Peak
4	17445.49	44.42	15.44	59.86	68.20	8.34	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-1_high channel 5240MHz

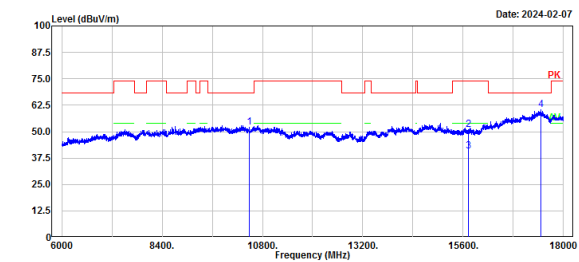

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	10480.00	45.58	6.60	52.18	68.20	16.02	Peak
2	15720.00	45.88	5.05	50.93	74.00	23.07	Peak
3	15720.00	35.68	5.05	40.73	74.00	33.27	Peak
4	17459.89	44.82	15.55	60.37	68.20	7.83	Peak

802.11n ht20 mode, High Channel, Bandedge, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-1_high channel 5240MHz

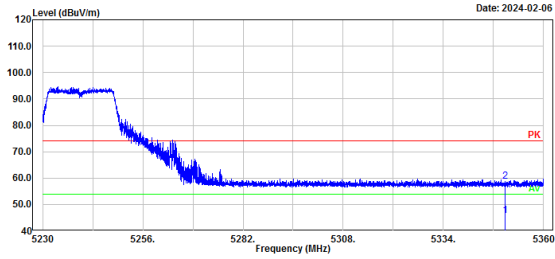

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.00	16.49	29.16	45.65	54.00	8.35	Average
2	5350.00	29.64	29.16	58.80	74.00	15.20	Peak

802.11n ht20 mode, High Channel, Bandedge, Vertical


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-1_high channel 5240MHz

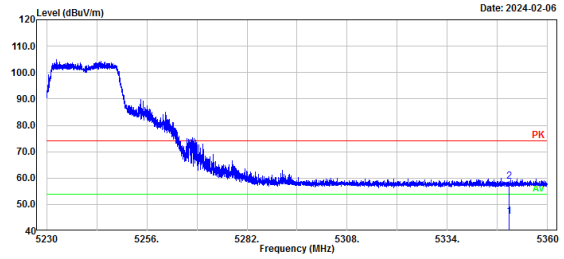

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.00	16.35	29.16	45.51	54.00	8.49	Average
2	5350.00	29.47	29.16	58.63	74.00	15.37	Peak

802.11n ht40 mode, Low Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-1_low channel 5190MHz

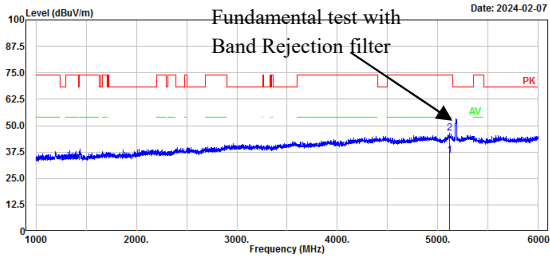

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5117.82	37.42	-1.39	36.03	54.00	17.97	Average
2	5117.82	47.68	-1.39	46.29	74.00	27.71	Peak


802.11n ht40 mode, Low Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-1_low channel 5190MHz

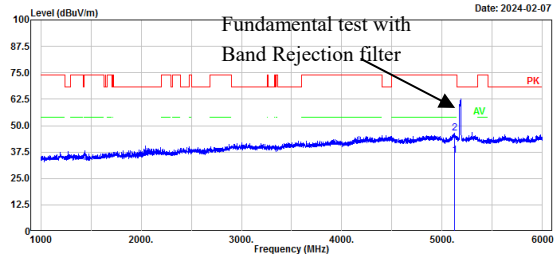


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5120.82	37.05	-1.36	35.69	54.00	18.31	Average
2	5120.82	47.62	-1.36	46.26	74.00	27.74	Peak

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-1_low channel 5190MHz

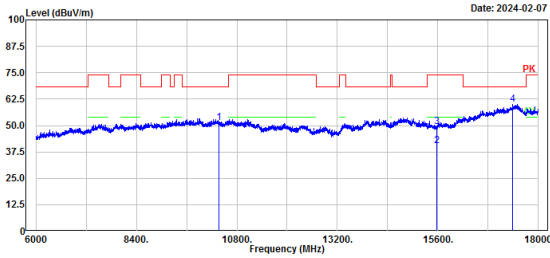

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10380.00	44.88	6.47	51.35	68.20	16.85	Peak
2	15570.00	35.69	4.72	40.41	54.00	13.59	Average
3	15570.00	44.73	4.72	49.45	74.00	24.55	Peak
4	17387.88	45.15	14.98	60.13	68.20	8.07	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-1_low channel 5190MHz

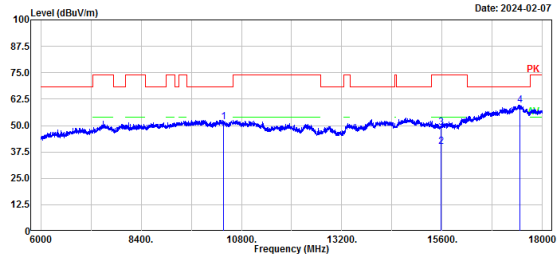

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10380.00	45.32	6.47	51.79	68.20	16.41	Peak
2	15570.00	35.26	4.72	39.98	54.00	14.02	Average
3	15570.00	44.21	4.72	48.93	74.00	25.07	Peak
4	17452.69	44.24	15.50	59.74	68.20	8.46	Peak

802.11n ht40 mode, Low Channel, Bandedge, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-1_low channel 5190MHz

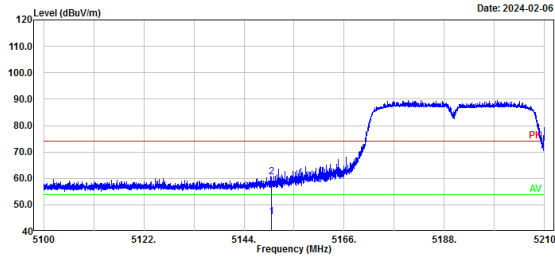

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5150.00	16.65	28.68	45.33	54.00	8.67	Average
2	5150.00	31.70	28.68	60.38	74.00	13.62	Peak

802.11n ht40 mode, Low Channel, Bandedge, Vertical


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-1_low channel 5190MHz

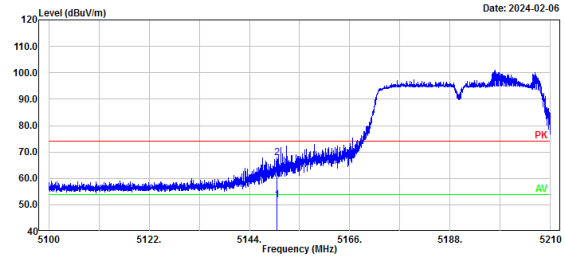

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5150.00	23.11	28.68	51.79	54.00	2.21	Average
2	5150.00	39.18	28.68	67.86	74.00	6.14	Peak

802.11n ht40 mode, High Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-1_high channel 5230MHz

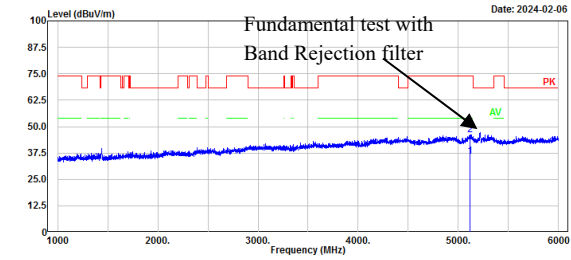

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5113.82	37.15	-1.41	35.74	54.00	18.26	Average
2	5113.82	47.53	-1.41	46.12	74.00	27.88	Peak


802.11n ht40 mode, High Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-1_high channel 5230MHz

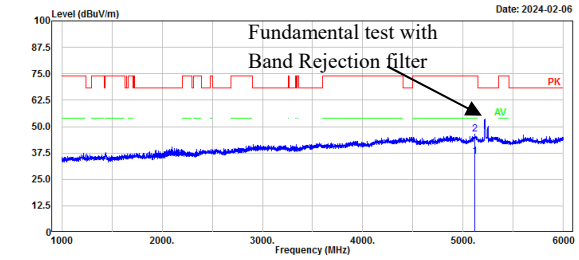


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5115.82	37.11	-1.40	35.71	54.00	18.29	Average
2	5115.82	47.65	-1.40	46.25	74.00	27.75	Peak

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-1_high channel 5230MHz

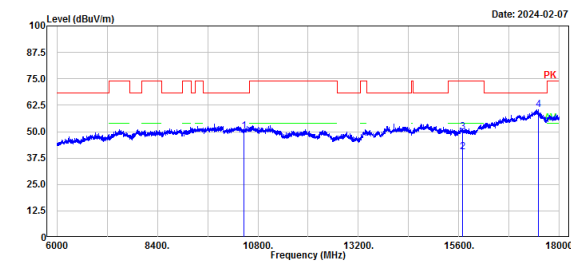

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10460.00	43.74	6.56	50.30	68.20	17.90	Peak
2	15690.00	35.28	4.97	40.25	54.00	13.75	Average
3	15690.00	44.71	4.97	49.68	74.00	24.32	Peak
4	17505.50	44.51	15.88	60.39	68.20	7.81	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-1_high channel 5230MHz

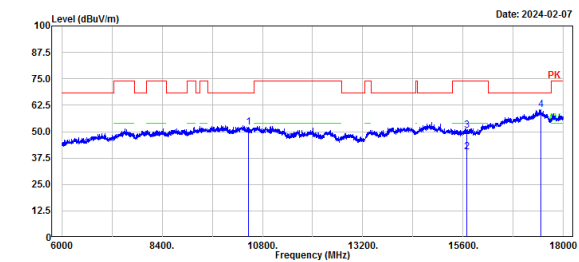

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10460.00	45.62	6.56	52.18	68.20	16.02	Peak
2	15690.00	35.27	4.97	40.24	54.00	13.76	Average
3	15690.00	45.43	4.97	50.40	74.00	23.60	Peak
4	17450.29	44.78	15.48	60.26	68.20	7.94	Peak

802.11n ht40 mode, High Channel, Bandedge, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-1_high channel 5230MHz

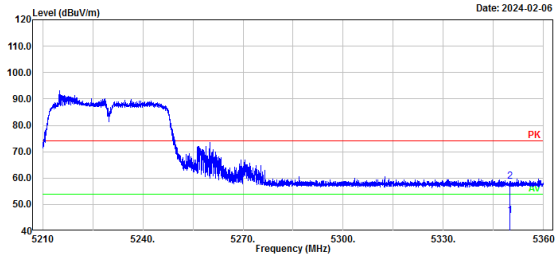

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.00	16.53	29.16	45.69	74.00	28.31	Peak
2	5350.00	29.63	29.16	58.79	74.00	15.21	Peak

802.11n ht40 mode, High Channel, Bandedge, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-1_high channel 5230MHz

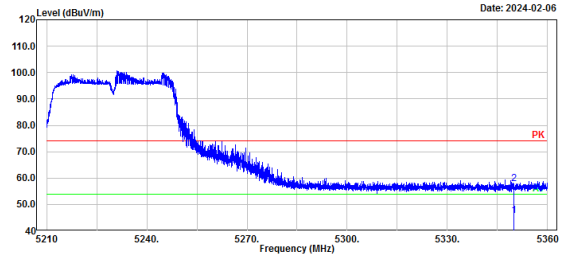


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.00	16.63	29.16	45.79	54.00	8.21	Average
2	5350.00	28.56	29.16	57.72	74.00	16.28	Peak

802.11ac80 mode, Middle Channel, Horizontal

Project No.: XMDN231122-69423E-RF
 Polarization: Horizontal
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-1_middle channel 5210MHz

Serial No.: 2E81-3
 Tester: Colin Yang

Date: 2024-05-31

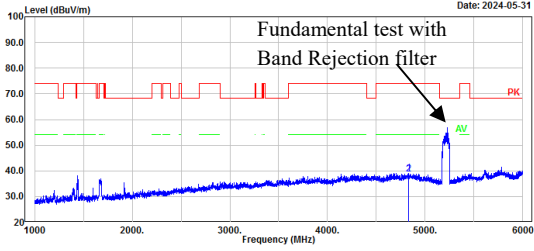


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4828.00	49.24	-10.09	39.15	74.00	34.85	Peak
2	4828.00	48.87	-10.09	38.78	54.00	15.22	Average

802.11ac80 mode, Middle Channel, Vertical

Project No.: XMDN231122-69423E-RF
 Polarization: Vertical
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-1_middle channel 5210MHz

Serial No.: 2E81-3
 Tester: Colin Yang

Date: 2024-05-31

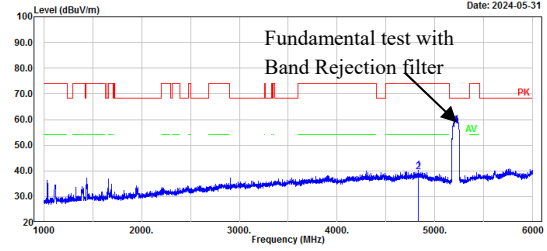


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4833.00	50.24	-10.08	40.16	74.00	33.84	Peak
2	4833.00	49.74	-10.08	39.66	54.00	14.34	Average

Project No.: XMDN231122-69423E-RF
 Polarization: Horizontal
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-1_middle channel 5210MHz

Serial No.: 2E81-3
 Tester: Colin Yang

Date: 2024-05-31

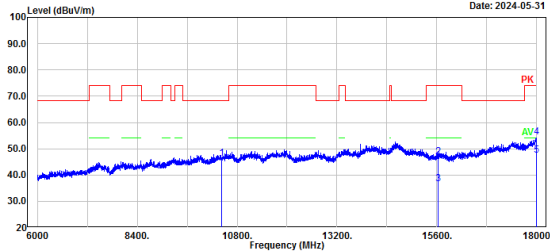


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10420.00	45.92	0.31	46.23	68.20	21.97	Peak
2	15630.00	46.25	0.57	46.82	74.00	27.18	Peak
3	15630.00	35.95	0.57	36.52	54.00	17.48	Average
4	18000.00	46.20	8.13	54.33	74.00	19.67	Peak
5	18000.00	39.40	8.13	47.53	54.00	6.47	Average

Project No.: XMDN231122-69423E-RF
 Polarization: Vertical
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-1_middle channel 5210MHz

Serial No.: 2E81-3
 Tester: Colin Yang


Date: 2024-05-31

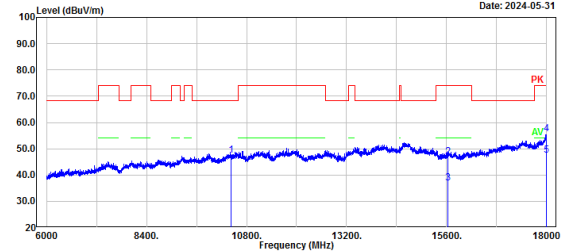

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10420.00	47.24	0.31	47.55	68.20	20.65	Peak
2	15630.00	46.35	0.57	46.92	74.00	27.08	Peak
3	15630.00	36.20	0.57	36.77	54.00	17.23	Average
4	18000.00	47.45	8.13	55.58	74.00	18.42	Peak
5	18000.00	39.26	8.13	47.39	54.00	6.61	Average

802.11ac80 mode, Middle Channel, Bandedge, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2E61-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-1_middle channel 5210MHz

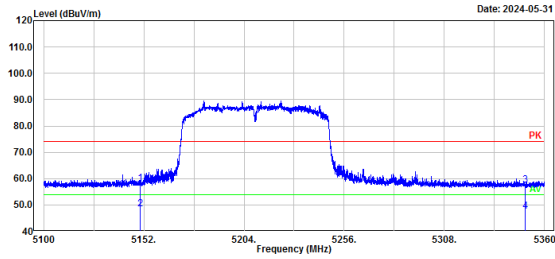

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.00	29.44	28.68	58.12	74.00	15.88	Peak
2	5150.00	19.69	28.68	48.37	54.00	5.63	Average
3	5350.00	28.40	29.16	57.56	74.00	16.44	Peak
4	5350.00	18.33	29.16	47.49	54.00	6.51	Average

802.11ac80 mode, Middle Channel, Bandedge, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2E61-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-1_middle channel 5210MHz

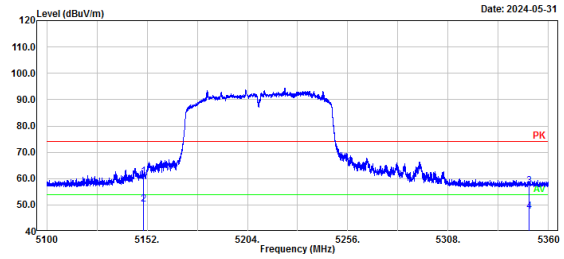


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.00	32.28	28.68	60.96	74.00	13.04	Peak
2	5150.00	21.56	28.68	50.24	54.00	3.76	Average
3	5350.00	28.09	29.16	57.25	74.00	16.75	Peak
4	5350.00	18.37	29.16	47.53	54.00	6.47	Average

5250-5350MHz :

802.11a mode, Low Channel, Horizontal		802.11a mode, Low Channel, Vertical																																																																																	
<p>Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3 Polarization: Horizontal Tester: Colin Yang Test Mode: Transmitting Note: 802.11a_U-NII-2A_low channel 5260MHz;</p> <p>Date: 2024-02-07</p>		<p>Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3 Polarization: Vertical Tester: Colin Yang Test Mode: Transmitting Note: 802.11a_U-NII-2A_low channel 5260MHz;</p> <p>Date: 2024-02-07</p>																																																																																	
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBμV)</th> <th>Factor (dB/m)</th> <th>Result (dBμV/m)</th> <th>Limit (dBμV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5118.824</td> <td>37.25</td> <td>-1.37</td> <td>35.88</td> <td>54.00</td> <td>18.12</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5118.824</td> <td>47.52</td> <td>-1.37</td> <td>46.15</td> <td>74.00</td> <td>27.85</td> <td>Peak</td> </tr> </tbody> </table>		No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	1	5118.824	37.25	-1.37	35.88	54.00	18.12	Average	2	5118.824	47.52	-1.37	46.15	74.00	27.85	Peak	<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBμV)</th> <th>Factor (dB/m)</th> <th>Result (dBμV/m)</th> <th>Limit (dBμV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5110.822</td> <td>37.45</td> <td>-1.43</td> <td>36.02</td> <td>54.00</td> <td>17.98</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5110.822</td> <td>48.28</td> <td>-1.43</td> <td>46.85</td> <td>74.00</td> <td>27.15</td> <td>Peak</td> </tr> </tbody> </table>		No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	1	5110.822	37.45	-1.43	36.02	54.00	17.98	Average	2	5110.822	48.28	-1.43	46.85	74.00	27.15	Peak																																
No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector																																																																												
1	5118.824	37.25	-1.37	35.88	54.00	18.12	Average																																																																												
2	5118.824	47.52	-1.37	46.15	74.00	27.85	Peak																																																																												
No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector																																																																												
1	5110.822	37.45	-1.43	36.02	54.00	17.98	Average																																																																												
2	5110.822	48.28	-1.43	46.85	74.00	27.15	Peak																																																																												
<p>Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3 Polarization: Horizontal Tester: Colin Yang Test Mode: Transmitting Note: 802.11a_U-NII-2A_low channel 5260MHz;</p> <p>Date: 2024-02-08</p>		<p>Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3 Polarization: Vertical Tester: Colin Yang Test Mode: Transmitting Note: 802.11a_U-NII-2A_low channel 5260MHz;</p> <p>Date: 2024-02-08</p>																																																																																	
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBμV)</th> <th>Factor (dB/m)</th> <th>Result (dBμV/m)</th> <th>Limit (dBμV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.000</td> <td>45.00</td> <td>6.63</td> <td>51.63</td> <td>68.20</td> <td>16.57</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.000</td> <td>36.23</td> <td>5.21</td> <td>41.44</td> <td>54.00</td> <td>12.56</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15780.000</td> <td>45.82</td> <td>5.21</td> <td>51.03</td> <td>74.00</td> <td>22.97</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>17493.500</td> <td>43.89</td> <td>15.82</td> <td>59.71</td> <td>68.20</td> <td>8.49</td> <td>Peak</td> </tr> </tbody> </table>		No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	1	10520.000	45.00	6.63	51.63	68.20	16.57	Peak	2	15780.000	36.23	5.21	41.44	54.00	12.56	Average	3	15780.000	45.82	5.21	51.03	74.00	22.97	Peak	4	17493.500	43.89	15.82	59.71	68.20	8.49	Peak	<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBμV)</th> <th>Factor (dB/m)</th> <th>Result (dBμV/m)</th> <th>Limit (dBμV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.000</td> <td>44.91</td> <td>6.63</td> <td>51.54</td> <td>68.20</td> <td>16.66</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.000</td> <td>36.25</td> <td>5.21</td> <td>41.46</td> <td>54.00</td> <td>12.54</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15780.000</td> <td>45.93</td> <td>5.21</td> <td>51.14</td> <td>74.00</td> <td>22.86</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>17450.290</td> <td>45.43</td> <td>15.48</td> <td>60.91</td> <td>68.20</td> <td>7.29</td> <td>Peak</td> </tr> </tbody> </table>		No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	1	10520.000	44.91	6.63	51.54	68.20	16.66	Peak	2	15780.000	36.25	5.21	41.46	54.00	12.54	Average	3	15780.000	45.93	5.21	51.14	74.00	22.86	Peak	4	17450.290	45.43	15.48	60.91	68.20	7.29	Peak
No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector																																																																												
1	10520.000	45.00	6.63	51.63	68.20	16.57	Peak																																																																												
2	15780.000	36.23	5.21	41.44	54.00	12.56	Average																																																																												
3	15780.000	45.82	5.21	51.03	74.00	22.97	Peak																																																																												
4	17493.500	43.89	15.82	59.71	68.20	8.49	Peak																																																																												
No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector																																																																												
1	10520.000	44.91	6.63	51.54	68.20	16.66	Peak																																																																												
2	15780.000	36.25	5.21	41.46	54.00	12.54	Average																																																																												
3	15780.000	45.93	5.21	51.14	74.00	22.86	Peak																																																																												
4	17450.290	45.43	15.48	60.91	68.20	7.29	Peak																																																																												

802.11a mode, Low Channel, Bandedge, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-2A_low channel 5260MH

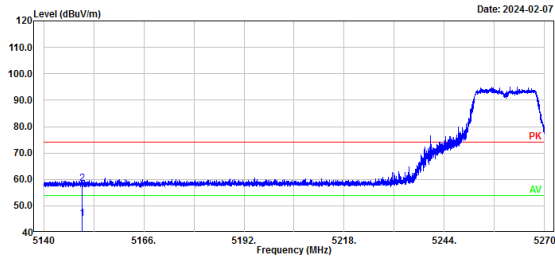

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5150.000	16.54	28.68	45.22	54.00	8.78	Average
2	5150.000	29.64	28.68	58.32	74.00	15.68	Peak

802.11a mode, Low Channel, Bandedge, Vertical


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-2A_low channel 5260MH

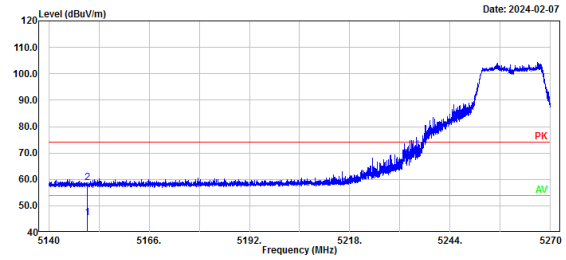

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5150.000	16.74	28.68	45.42	54.00	8.58	Average
2	5150.000	30.16	28.68	58.84	74.00	15.16	Peak

802.11a mode, Middle Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-2A_middle channel 5280MHz;

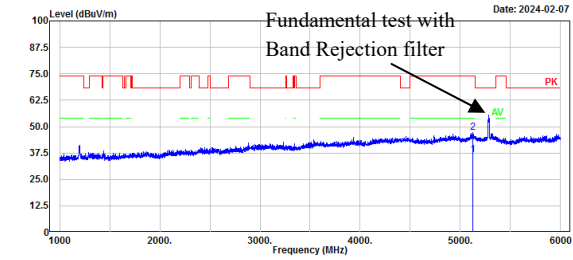

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5126.825	37.84	-1.30	36.54	54.00	17.46	Average
2	5126.825	48.63	-1.30	47.33	74.00	26.67	Peak


802.11a mode, Middle Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-2A_middle channel 5280MHz;

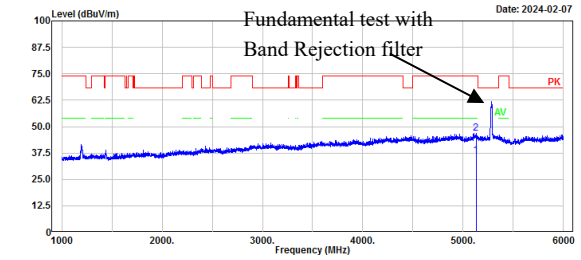


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5127.826	37.70	-1.29	36.41	54.00	17.59	Average
2	5127.826	48.19	-1.29	46.90	74.00	27.10	Peak

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-2A_middle channel 5280MHz;

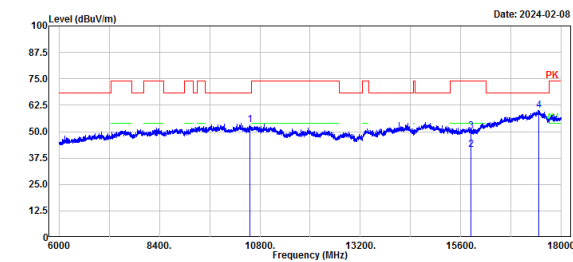

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	10560.000	46.54	6.63	53.17	68.20	15.03	Peak
2	15840.000	36.17	5.27	41.44	54.00	12.56	Average
3	15840.000	44.96	5.27	50.23	74.00	23.77	Peak
4	17452.690	44.61	15.50	60.11	68.20	8.09	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-2A_middle channel 5280MHz;

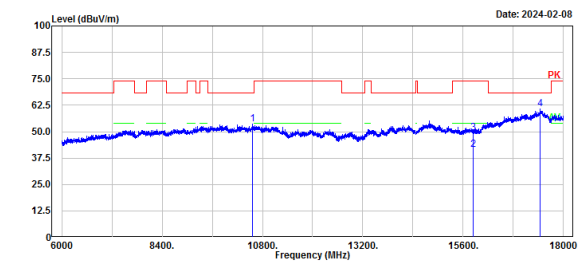

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	10560.000	46.92	6.63	53.55	68.20	14.65	Peak
2	15840.000	36.15	5.27	41.42	54.00	12.58	Average
3	15840.000	44.28	5.27	49.55	74.00	24.45	Peak
4	17445.490	45.19	15.44	60.63	68.20	7.57	Peak

802.11a mode, High Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-2A_high channel 5320MH

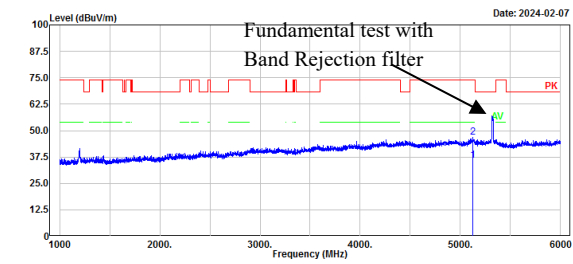

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5120.824	37.25	-1.36	35.89	54.00	18.11	Average
2	5120.824	48.06	-1.36	46.70	74.00	27.30	Peak


802.11a mode, High Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-2A_high channel 5320MH

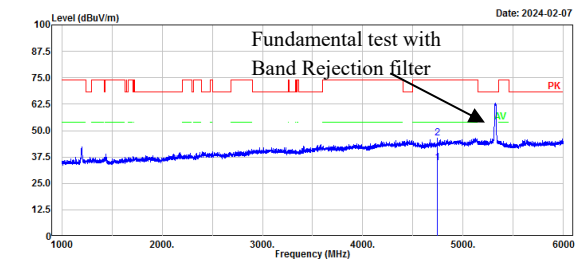


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4743.749	37.68	-3.11	34.57	54.00	19.43	Average
2	4743.749	49.59	-3.11	46.48	74.00	27.52	Peak

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-2A_high channel 5320MH

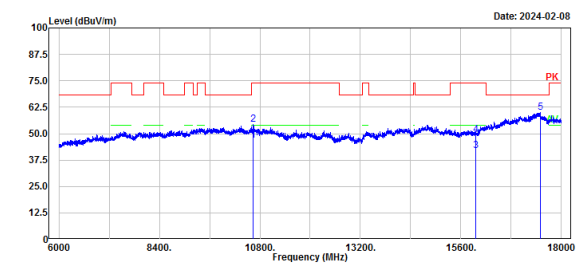

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10640.000	40.26	6.55	46.81	54.00	7.19	Average
2	10640.000	47.72	6.55	54.27	74.00	19.73	Peak
3	15960.000	36.35	5.45	41.80	54.00	12.20	Average
4	15960.000	44.06	5.45	49.51	74.00	24.49	Peak
5	17488.700	44.20	15.78	59.98	68.20	8.22	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-2A_high channel 5320MH

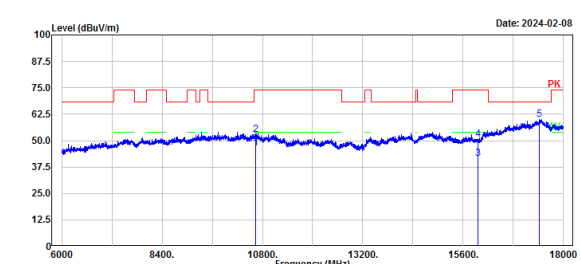

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10640.000	39.87	6.55	46.42	54.00	7.58	Average
2	10640.000	46.36	6.55	52.91	74.00	21.09	Peak
3	15960.000	36.17	5.45	41.62	54.00	12.38	Average
4	15960.000	44.96	5.45	50.41	74.00	23.59	Peak
5	17414.280	44.92	15.19	60.11	68.20	8.09	Peak

802.11a mode, High Channel, Bandedge, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-2A_high channel 5320MHz

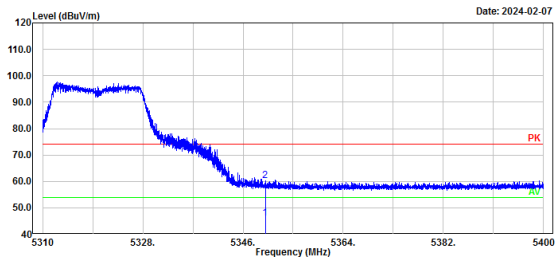

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	16.75	29.16	45.91	54.00	8.09	Average
2	5350.000	31.13	29.16	60.29	74.00	13.71	Peak

802.11a mode, High Channel, Bandedge, Vertical


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-2A_high channel 5320MHz

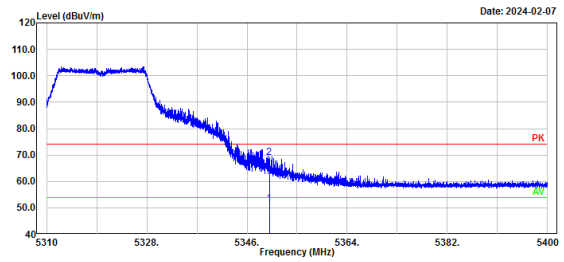

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	22.45	29.16	51.61	54.00	2.39	Average
2	5350.000	39.80	29.16	68.96	74.00	5.04	Peak

802.11n ht20 mode, Low Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2A_low channel 5260MHz

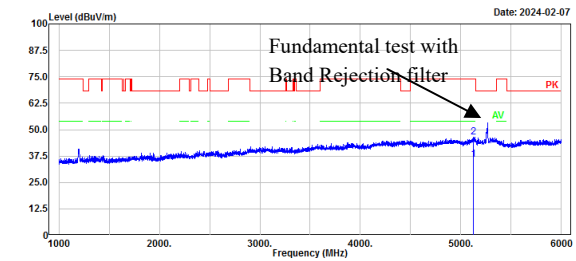

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5124.825	37.28	-1.33	35.95	54.00	18.05	Average
2	5124.825	47.92	-1.33	46.59	74.00	27.41	Peak


802.11n ht20 mode, Low Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2A_low channel 5260MHz

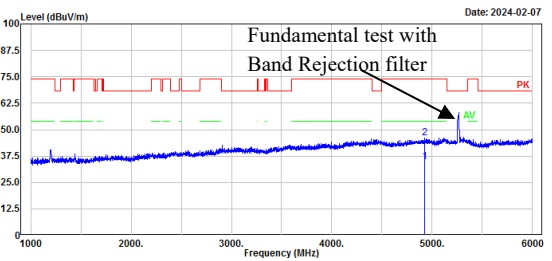


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4924.785	37.32	-2.53	34.79	54.00	19.21	Average
2	4924.785	48.68	-2.53	46.15	74.00	27.85	Peak

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2A_low channel 5260MHz

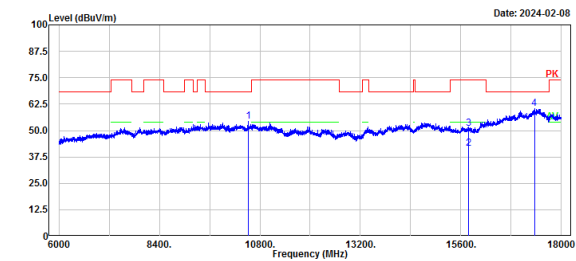

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10520.000	47.68	6.63	54.31	68.20	13.89	Peak
2	15780.000	36.13	5.21	41.34	54.00	12.66	Average
3	15780.000	45.86	5.21	51.07	74.00	22.93	Peak
4	17354.270	45.59	14.70	60.29	68.20	7.91	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2A_low channel 5260MHz

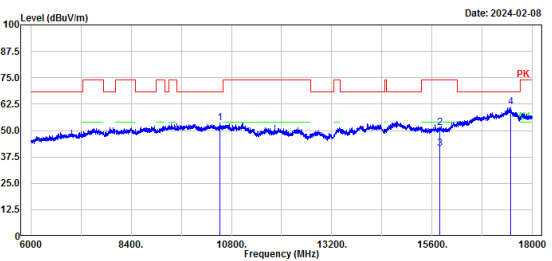

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10520.00	47.13	6.63	53.76	68.20	14.44	Peak
2	15780.00	45.99	5.21	51.20	74.00	22.80	Peak
3	15780.00	36.35	5.21	41.56	54.00	12.44	Average
4	17486.30	45.50	15.76	61.26	68.20	6.94	Peak

802.11n ht20 mode, Low Channel, Bandedge, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2A_low channel 5260MHz

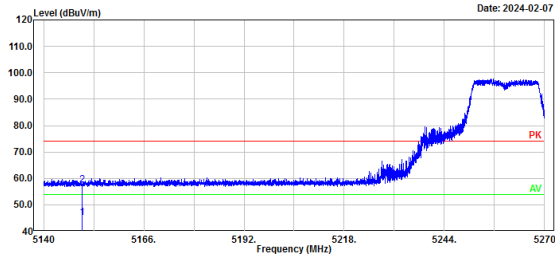

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	16.59	28.68	45.27	54.00	8.73	Average
2	5150.000	28.96	28.68	57.64	74.00	16.36	Peak

802.11n ht20 mode, Low Channel, Bandedge, Vertical


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2A_low channel 5260MHz

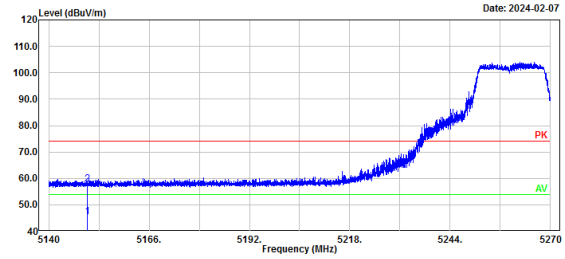

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	16.73	28.68	45.41	54.00	8.59	Average
2	5150.000	29.00	28.68	57.68	74.00	16.32	Peak

802.11n ht20 mode, Middle Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2A_middle channel 5280MHz

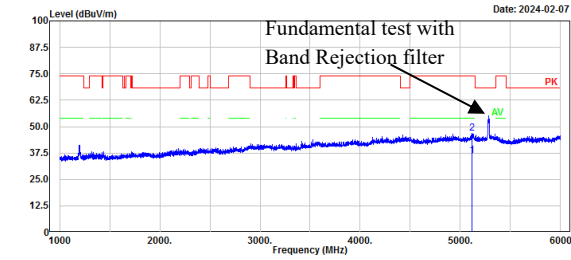

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5118.824	37.55	-1.37	36.18	54.00	17.82	Average
2	5118.824	48.15	-1.37	46.78	74.00	27.22	Peak


802.11n ht20 mode, Middle Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2A_middle channel 5280MHz

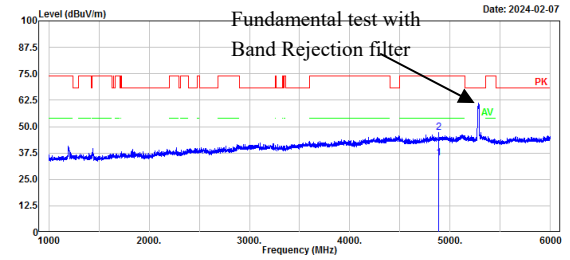


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4883.777	37.67	-2.71	34.96	54.00	19.04	Average
2	4883.777	49.70	-2.71	46.99	74.00	27.01	Peak

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2A_middle channel 5280MHz

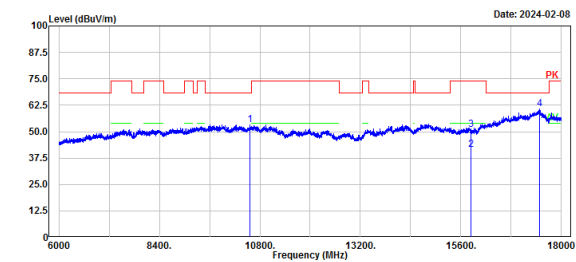

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10560.000	46.62	6.63	53.25	68.20	14.95	Peak
2	15840.000	36.27	5.27	41.54	54.00	12.46	Average
3	15840.000	45.84	5.27	51.11	74.00	22.89	Peak
4	17476.700	44.92	15.68	60.60	68.20	7.60	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2A_middle channel 5280MHz

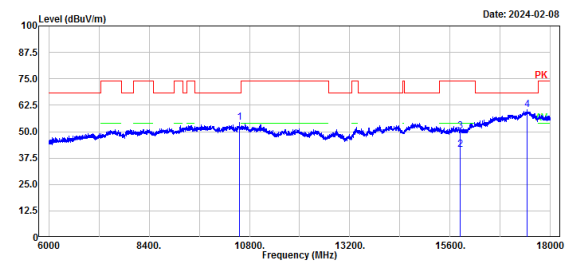

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10560.000	47.60	6.63	54.23	68.20	13.97	Peak
2	15840.000	36.09	5.27	41.36	54.00	12.64	Average
3	15840.000	45.04	5.27	50.31	74.00	23.69	Peak
4	17443.090	44.87	15.42	60.29	68.20	7.91	Peak

802.11n ht20 mode, High Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2A_high channel 5320MHz

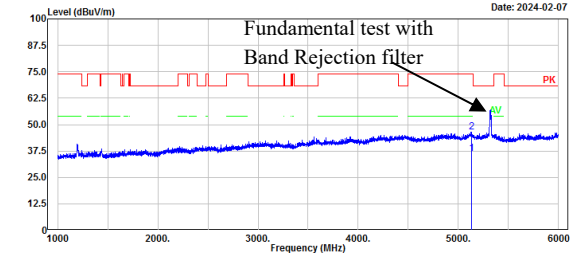

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5133.827	37.52	-1.24	36.28	54.00	17.72	Average
2	5133.827	47.84	-1.24	46.60	74.00	27.40	Peak


802.11n ht20 mode, High Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2A_high channel 5320MHz

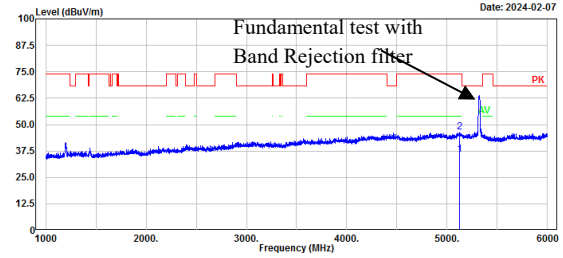


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5126.825	37.24	-1.30	35.94	54.00	18.06	Average
2	5126.825	47.55	-1.30	46.25	74.00	27.75	Peak

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2A_high channel 5320MHz

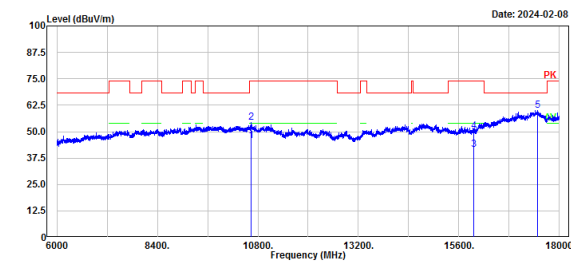

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	10640.000	39.29	6.55	45.84	54.00	8.16	Average
2	10640.000	47.64	6.55	54.19	74.00	19.81	Peak
3	15960.000	36.23	5.45	41.68	54.00	12.32	Average
4	15960.000	44.81	5.45	50.26	74.00	23.74	Peak
5	17469.490	44.44	15.62	60.06	68.20	8.14	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2A_high channel 5320MHz

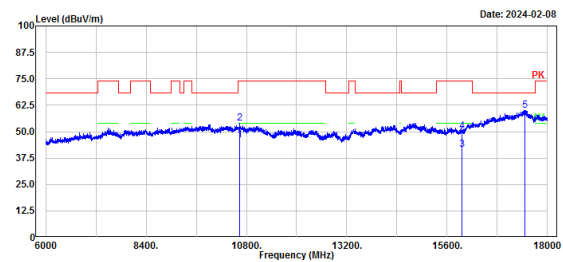

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	10640.000	39.64	6.55	46.19	54.00	7.81	Average
2	10640.000	47.32	6.55	53.87	74.00	20.13	Peak
3	15960.000	36.22	5.45	41.67	54.00	12.33	Average
4	15960.000	44.92	5.45	50.37	74.00	23.63	Peak
5	17457.490	44.64	15.53	60.17	68.20	8.03	Peak

802.11n ht20 mode, High Channel, Bandedge, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2A_high channel 5320MHz

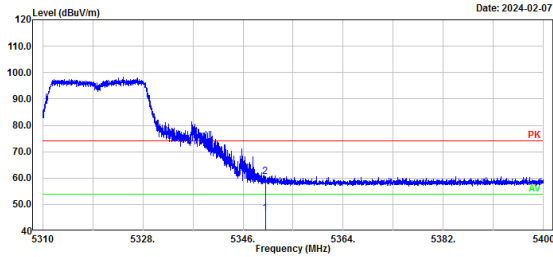

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	17.43	29.16	46.59	54.00	7.41	Average
2	5350.000	31.29	29.16	60.45	74.00	13.55	Peak

802.11n ht20 mode, High Channel, Bandedge, Vertical


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2A_high channel 5320MHz

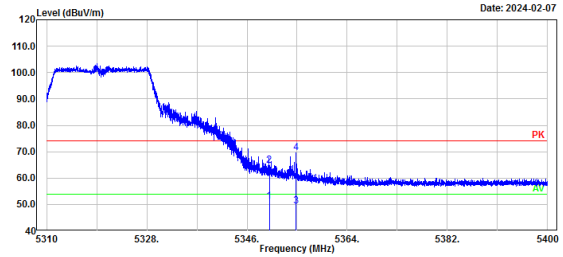

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	22.15	29.16	51.31	54.00	2.69	Average
2	5350.000	35.72	29.16	64.88	74.00	9.12	Peak
3	5354.847	20.12	29.17	49.29	54.00	4.71	Average
4	5354.847	40.48	29.17	69.65	74.00	4.35	Peak

802.11n ht40 mode, Low Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-2A_low channel 5270MHz

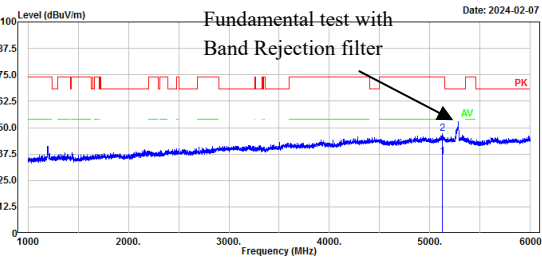

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5121.824	37.62	-1.35	36.27	54.00	17.73	Average
2	5121.824	48.67	-1.35	47.32	74.00	26.68	Peak


802.11n ht40 mode, Low Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-2A_low channel 5270MHz

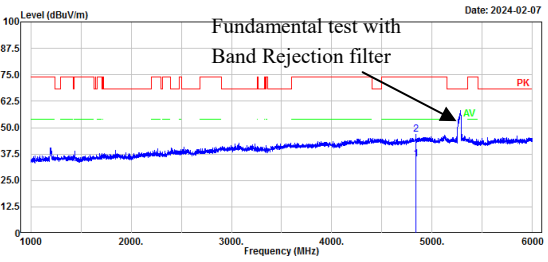


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4836.768	37.84	-2.93	34.91	54.00	19.09	Average
2	4836.768	49.57	-2.93	46.64	74.00	27.36	Peak

Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-2A_low channel 5270MHz

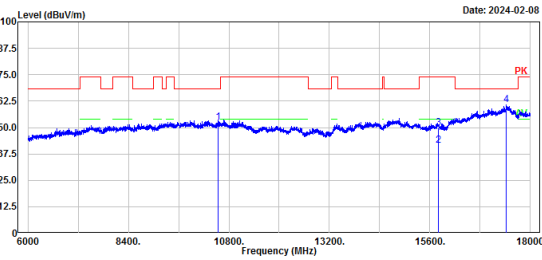

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10540.000	45.86	6.62	52.48	68.20	15.72	Peak
2	15810.000	36.07	5.27	41.34	54.00	12.66	Average
3	15810.000	44.52	5.27	49.79	74.00	24.21	Peak
4	17416.600	45.57	15.22	60.79	68.20	7.41	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-2A_low channel 5270MHz

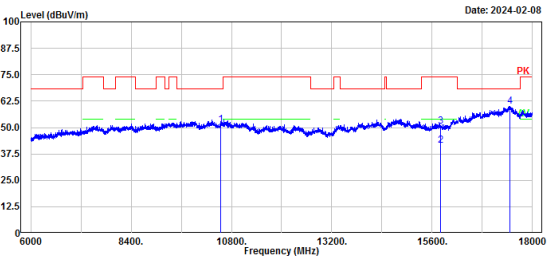

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10540.000	44.70	6.62	51.32	68.20	16.88	Peak
2	15810.000	36.25	5.27	41.52	54.00	12.48	Average
3	15810.000	45.36	5.27	50.63	74.00	23.37	Peak
4	17455.090	44.55	15.51	60.04	68.20	8.16	Peak

802.11n ht40 mode, Low Channel, Bandedge, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-2A_low channel 5270MHz

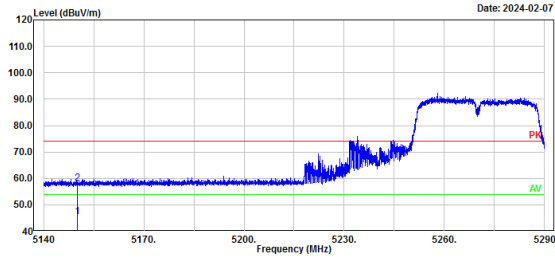

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	16.63	28.68	45.31	54.00	8.69	Average
2	5150.000	29.35	28.68	58.03	74.00	15.97	Peak

802.11n ht40 mode, Low Channel, Bandedge, Vertical


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-2A_low channel 5270MHz

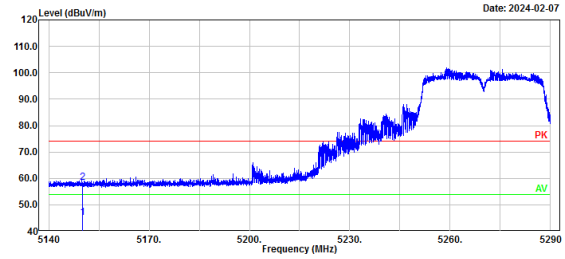

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	16.38	28.68	45.06	54.00	8.94	Average
2	5150.000	29.60	28.68	58.28	74.00	15.72	Peak

802.11n ht40 mode, High Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-2A_high channel 5310MHz

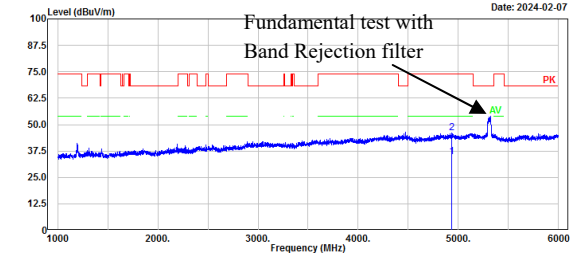

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4935.787	37.20	-2.47	34.73	54.00	19.27	Average
2	4935.787	48.54	-2.47	46.07	74.00	27.93	Peak


802.11n ht40 mode, High Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-2A_high channel 5310MHz

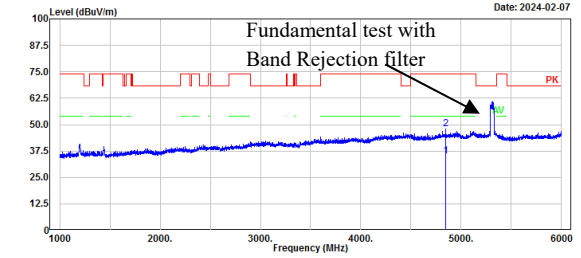


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4844.769	38.11	-2.89	35.22	54.00	18.78	Average
2	4844.769	50.79	-2.89	47.90	74.00	26.10	Peak

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-2A_high channel 5310MHz

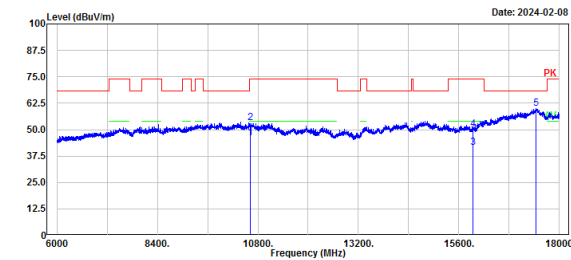

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10620.000	39.40	6.59	45.99	54.00	8.01	Average
2	10620.000	46.68	6.59	53.27	74.00	20.73	Peak
3	15930.000	36.22	5.36	41.58	54.00	12.42	Average
4	15930.000	44.64	5.36	50.00	74.00	24.00	Peak
5	17435.890	44.52	15.36	59.88	68.20	8.32	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-2A_high channel 5310MHz

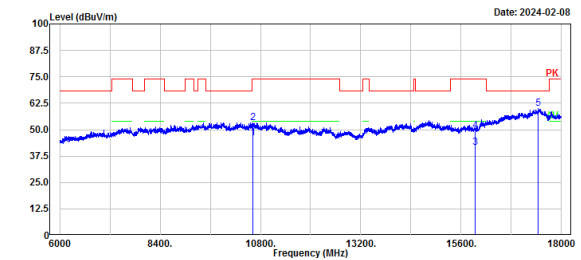

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10620.000	39.28	6.59	45.87	54.00	8.13	Average
2	10620.000	46.76	6.59	53.35	74.00	20.65	Peak
3	15930.000	36.15	5.36	41.51	54.00	12.49	Average
4	15930.000	44.22	5.36	49.58	74.00	24.42	Peak
5	17447.890	44.69	15.45	60.14	68.20	8.06	Peak

802.11n ht40 mode, High Channel, Bandedge, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-2A_high channel 5310MHz

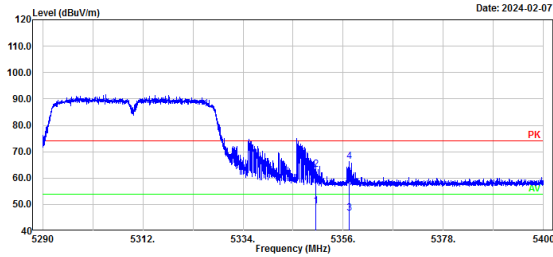

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	20.32	29.16	49.48	54.00	4.52	Average
2	5350.000	34.06	29.16	63.22	74.00	10.78	Peak
3	5357.312	17.36	29.17	46.53	54.00	7.47	Average
4	5357.312	37.21	29.17	66.38	74.00	7.62	Peak

802.11n ht40 mode, High Channel, Bandedge, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-2A_high channel 5310MHz

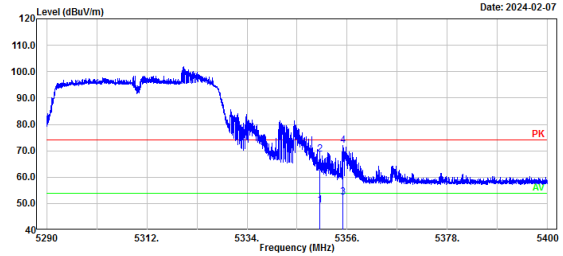


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.00	20.32	29.16	49.48	54.00	4.52	Average
2	5350.00	39.40	29.16	68.56	74.00	5.44	Peak
3	5355.05	23.12	29.17	52.29	54.00	1.71	Average
4	5355.05	42.86	29.17	72.03	74.00	1.97	Peak

802.11ac80 mode, Middle Channel, Horizontal

Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-2A_middle channel 5290MHz

Date: 2024-05-31

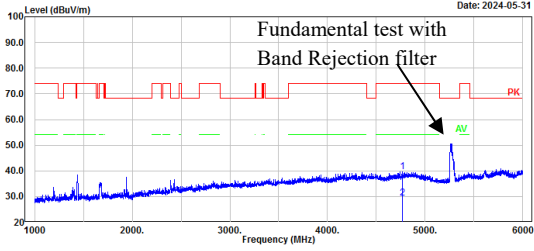


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4767.00	49.86	-10.09	39.77	74.00	34.23	Peak
2	4767.00	39.54	-10.09	29.45	54.00	24.55	Average

802.11ac80 mode, Middle Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-2A_middle channel 5290MHz


Date: 2024-05-31

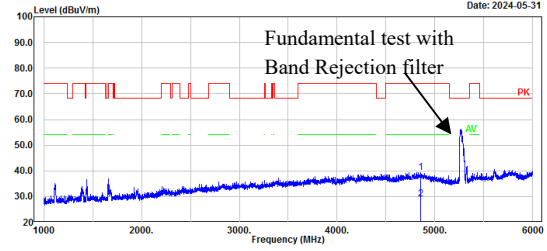

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4852.00	49.48	-10.06	39.42	74.00	34.58	Peak
2	4852.00	39.17	-10.06	29.11	54.00	24.89	Average

Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-2A_middle channel 5290MHz


Date: 2024-05-31

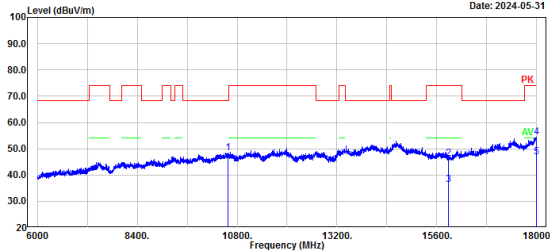

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10580.00	47.89	0.63	48.52	68.20	19.68	Peak
2	15870.00	45.91	0.49	46.40	74.00	27.60	Peak
3	15870.00	35.73	0.49	36.22	54.00	17.78	Average
4	17992.80	46.47	8.09	54.56	74.00	19.44	Peak
5	17992.80	38.91	8.09	47.00	54.00	7.00	Average

Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-2A_middle channel 5290MHz


Date: 2024-05-31

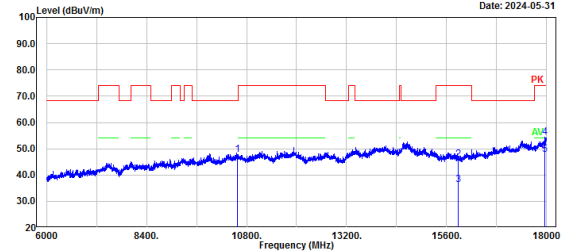

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10580.00	47.11	0.63	47.74	68.20	20.46	Peak
2	15870.00	45.59	0.49	46.08	74.00	27.92	Peak
3	15870.00	35.90	0.49	36.39	54.00	17.61	Average
4	17949.60	46.48	7.82	54.30	74.00	19.70	Peak
5	17949.60	40.07	7.82	47.89	54.00	6.11	Average

802.11ac80 mode, Middle Channel, Bandedge, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2E61-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-2A_middle channel 5290MHz

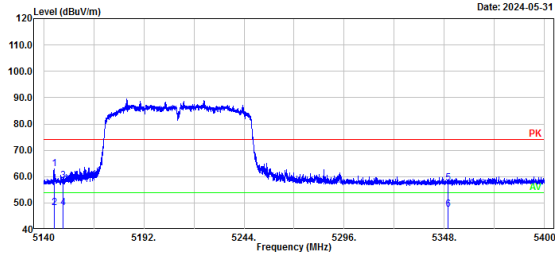

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5145.46	34.38	28.67	63.05	74.00	10.95	Peak
2	5145.46	19.51	28.67	48.18	54.00	5.82	Average
3	5150.00	29.81	28.68	58.49	74.00	15.51	Peak
4	5150.00	19.38	28.68	48.06	54.00	5.94	Average
5	5350.00	28.31	29.16	57.47	74.00	16.53	Peak
6	5350.00	18.46	29.16	47.62	54.00	6.38	Average

802.11ac80 mode, Middle Channel, Bandedge, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2E61-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-2A_middle channel 5290MHz

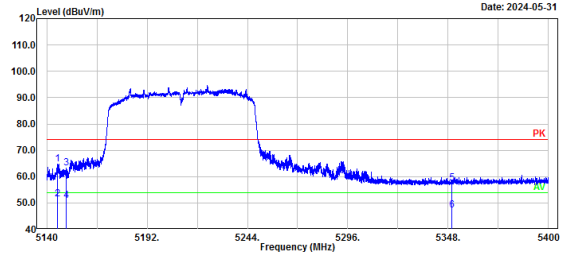

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5145.56	36.21	28.67	64.88	74.00	9.12	Peak
2	5145.56	22.79	28.67	51.46	54.00	2.54	Average
3	5150.00	34.50	28.68	63.18	74.00	10.82	Peak
4	5150.00	22.33	28.68	51.01	54.00	2.99	Average
5	5350.00	28.29	29.16	57.45	74.00	16.55	Peak
6	5350.00	17.97	29.16	47.13	54.00	6.87	Average


5470-5725MHz :

802.11a mode, Low Channel, Horizontal		802.11a mode, Low Channel, Vertical																																																																																	
Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3 Polarization: Horizontal Tester: Colin Yang Test Mode: Transmitting Note: 802.11a_U-NII-2C_low channel 5500MHz;		Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3 Polarization: Vertical Tester: Colin Yang Test Mode: Transmitting Note: 802.11a_U-NII-2C_low channel 5500MHz;																																																																																	
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBμV)</th> <th>Factor (dB/m)</th> <th>Result (dBμV/m)</th> <th>Limit (dBμV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5127.83</td> <td>37.35</td> <td>-1.29</td> <td>36.06</td> <td>54.00</td> <td>17.94</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5127.83</td> <td>47.37</td> <td>-1.29</td> <td>46.08</td> <td>74.00</td> <td>27.92</td> <td>Peak</td> </tr> </tbody> </table>		No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	1	5127.83	37.35	-1.29	36.06	54.00	17.94	Average	2	5127.83	47.37	-1.29	46.08	74.00	27.92	Peak	<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBμV)</th> <th>Factor (dB/m)</th> <th>Result (dBμV/m)</th> <th>Limit (dBμV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5104.82</td> <td>38.02</td> <td>-1.49</td> <td>36.53</td> <td>54.00</td> <td>17.47</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5104.82</td> <td>48.60</td> <td>-1.49</td> <td>47.11</td> <td>74.00</td> <td>26.89</td> <td>Peak</td> </tr> </tbody> </table>		No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	1	5104.82	38.02	-1.49	36.53	54.00	17.47	Average	2	5104.82	48.60	-1.49	47.11	74.00	26.89	Peak																																
No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector																																																																												
1	5127.83	37.35	-1.29	36.06	54.00	17.94	Average																																																																												
2	5127.83	47.37	-1.29	46.08	74.00	27.92	Peak																																																																												
No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector																																																																												
1	5104.82	38.02	-1.49	36.53	54.00	17.47	Average																																																																												
2	5104.82	48.60	-1.49	47.11	74.00	26.89	Peak																																																																												
Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3 Polarization: Horizontal Tester: Colin Yang Test Mode: Transmitting Note: 802.11a_U-NII-2C_low channel 5500MHz;		Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3 Polarization: Vertical Tester: Colin Yang Test Mode: Transmitting Note: 802.11a_U-NII-2C_low channel 5500MHz;																																																																																	
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBμV)</th> <th>Factor (dB/m)</th> <th>Result (dBμV/m)</th> <th>Limit (dBμV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>39.82</td> <td>6.35</td> <td>46.17</td> <td>54.00</td> <td>7.83</td> <td>Average</td> </tr> <tr> <td>2</td> <td>11000.00</td> <td>47.10</td> <td>6.35</td> <td>53.45</td> <td>74.00</td> <td>20.55</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>16500.00</td> <td>44.49</td> <td>9.36</td> <td>53.85</td> <td>68.20</td> <td>14.35</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>17419.08</td> <td>45.52</td> <td>15.23</td> <td>60.75</td> <td>68.20</td> <td>7.45</td> <td>Peak</td> </tr> </tbody> </table>		No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	1	11000.00	39.82	6.35	46.17	54.00	7.83	Average	2	11000.00	47.10	6.35	53.45	74.00	20.55	Peak	3	16500.00	44.49	9.36	53.85	68.20	14.35	Peak	4	17419.08	45.52	15.23	60.75	68.20	7.45	Peak	<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBμV)</th> <th>Factor (dB/m)</th> <th>Result (dBμV/m)</th> <th>Limit (dBμV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>40.12</td> <td>6.35</td> <td>46.47</td> <td>54.00</td> <td>7.53</td> <td>Average</td> </tr> <tr> <td>2</td> <td>11000.00</td> <td>47.77</td> <td>6.35</td> <td>54.12</td> <td>74.00</td> <td>19.88</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>16500.00</td> <td>43.90</td> <td>9.36</td> <td>53.26</td> <td>68.20</td> <td>14.94</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>17455.09</td> <td>44.93</td> <td>15.51</td> <td>60.44</td> <td>68.20</td> <td>7.76</td> <td>Peak</td> </tr> </tbody> </table>		No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	1	11000.00	40.12	6.35	46.47	54.00	7.53	Average	2	11000.00	47.77	6.35	54.12	74.00	19.88	Peak	3	16500.00	43.90	9.36	53.26	68.20	14.94	Peak	4	17455.09	44.93	15.51	60.44	68.20	7.76	Peak
No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector																																																																												
1	11000.00	39.82	6.35	46.17	54.00	7.83	Average																																																																												
2	11000.00	47.10	6.35	53.45	74.00	20.55	Peak																																																																												
3	16500.00	44.49	9.36	53.85	68.20	14.35	Peak																																																																												
4	17419.08	45.52	15.23	60.75	68.20	7.45	Peak																																																																												
No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector																																																																												
1	11000.00	40.12	6.35	46.47	54.00	7.53	Average																																																																												
2	11000.00	47.77	6.35	54.12	74.00	19.88	Peak																																																																												
3	16500.00	43.90	9.36	53.26	68.20	14.94	Peak																																																																												
4	17455.09	44.93	15.51	60.44	68.20	7.76	Peak																																																																												

802.11a mode, Low Channel, Bandedge, Horizontal

Project No.: XMDN231122-69423E-RF
 Polarization: Horizontal
 Test Mode: Transmitting
 Note: 802.11a_U-NII-2C_low channel 5500MHz

Serial No.: 2E81-3
 Tester: Colin Yang

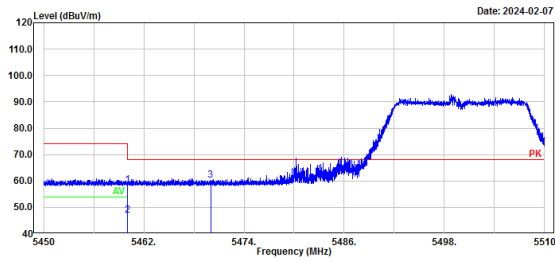


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5460.00	29.09	29.34	58.43	74.00	15.57	Peak
2	5460.00	17.53	29.34	46.87	54.00	7.13	Average
3	5470.00	30.81	29.36	60.17	68.20	8.03	Peak

802.11a mode, Low Channel, Bandedge, Vertical

Project No.: XMDN231122-69423E-RF
 Polarization: Vertical
 Test Mode: Transmitting
 Note: 802.11a_U-NII-2C_low channel 5500MHz


Serial No.: 2E81-3
 Tester: Colin Yang

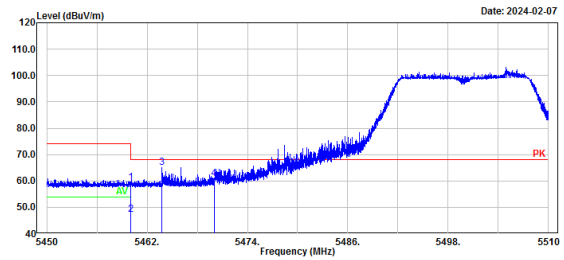

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5460.00	30.02	29.34	59.36	74.00	14.64	Peak
2	5460.00	17.89	29.34	47.23	54.00	6.77	Average
3	5463.76	35.70	29.35	65.05	68.20	3.15	Peak
4	5470.00	31.34	29.36	60.70	68.20	7.50	Peak

802.11a mode, Middle Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-2C_middle channel 5580MHz;

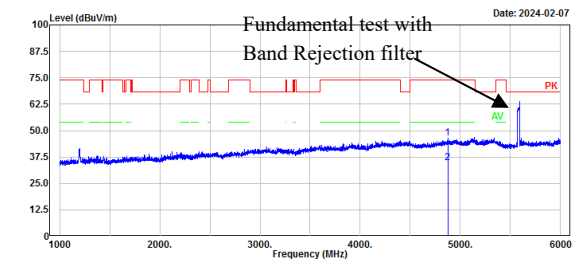

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4873.78	49.01	-2.77	46.24	74.00	27.76	Peak
2	4873.78	37.59	-2.77	34.82	54.00	19.18	Average


802.11a mode, Middle Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-2C_middle channel 5580MHz;

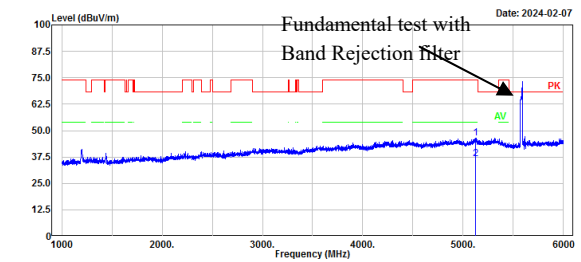


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5125.83	47.86	-1.30	46.56	74.00	27.44	Peak
2	5125.83	37.80	-1.30	36.50	54.00	17.50	Average

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-2C_middle channel 5580MHz;

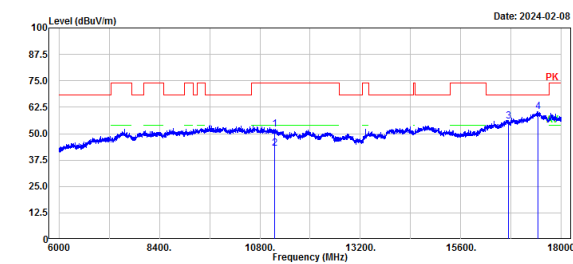

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11160.00	46.09	5.91	52.00	74.00	22.00	Peak
2	11160.00	37.25	5.91	43.15	54.00	10.84	Average
3	16740.00	45.14	10.64	55.78	68.20	12.42	Peak
4	17445.49	45.04	15.44	60.48	68.20	7.72	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-2C_middle channel 5580MHz;

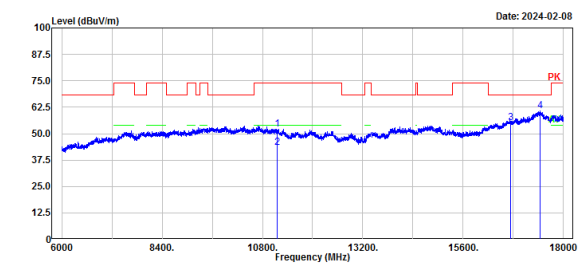

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11160.00	46.12	5.91	52.03	74.00	21.97	Peak
2	11160.00	37.47	5.91	43.38	54.00	10.62	Average
3	16740.00	44.41	10.64	55.05	68.20	13.15	Peak
4	17447.89	45.13	15.45	60.58	68.20	7.62	Peak

802.11a mode, High Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-2C_high channel 5700MH

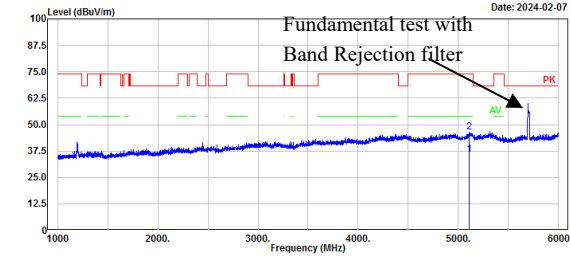

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5109.82	37.24	-1.45	35.79	54.00	18.21	Average
2	5109.82	47.91	-1.45	46.46	74.00	27.54	Peak


802.11a mode, High Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-2C_high channel 5700MH

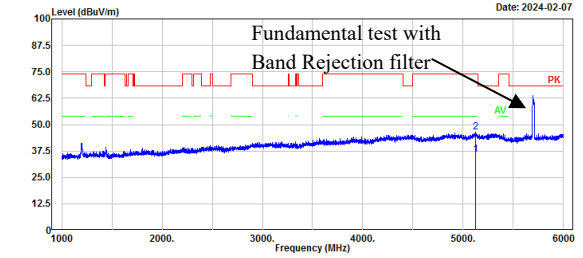


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5124.83	37.35	-1.33	36.02	54.00	17.98	Average
2	5124.83	47.56	-1.33	46.23	74.00	27.77	Peak

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-2C_high channel 5700MH

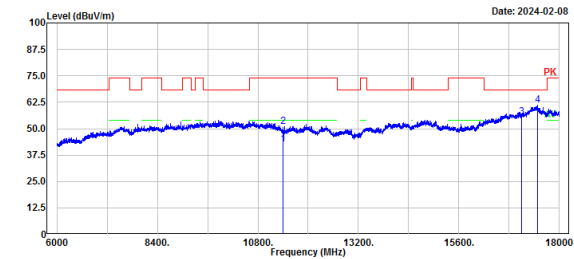

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11400.00	38.21	4.33	42.54	54.00	11.46	Average
2	11400.00	46.47	4.33	50.80	74.00	23.20	Peak
3	17100.00	42.59	12.80	55.39	68.20	12.81	Peak
4	17469.49	45.45	15.62	61.07	68.20	7.13	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-2C_high channel 5700MH

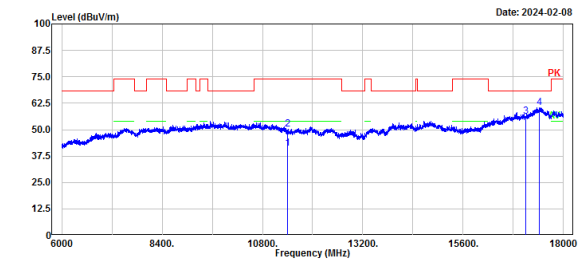

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11400.00	36.89	4.33	41.22	54.00	12.78	Average
2	11400.00	45.91	4.33	50.24	74.00	23.76	Peak
3	17100.00	43.36	12.80	56.16	68.20	12.04	Peak
4	17416.68	45.30	15.22	60.52	68.20	7.68	Peak

802.11a mode, High Channel, Bandedge, Horizontal


Project No.: XMDN231122-69423E-RF
 Polarization: Horizontal
 Test Mode: Transmitting
 Note: 802.11a_U-NII-2C_hgih channel 5700MHz
 Serial No.: 2E81-3
 Tester: Colin Yang

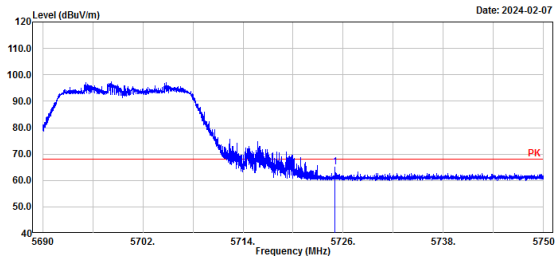

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.00	35.20	29.81	65.01	68.20	3.19	Peak

802.11a mode, High Channel, Bandedge, Vertical


Project No.: XMDN231122-69423E-RF
 Polarization: Vertical
 Test Mode: Transmitting
 Note: 802.11a_U-NII-2C_hgih channel 5700MHz
 Serial No.: 2E81-3
 Tester: Colin Yang

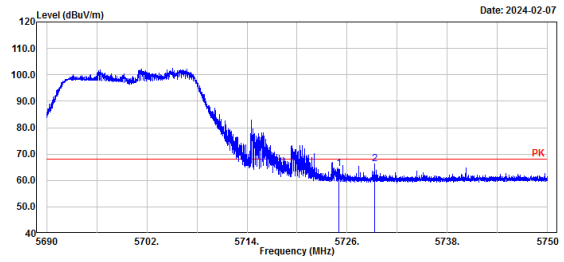

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.00	34.54	29.81	64.35	68.20	3.85	Peak
2	5729.30	36.42	29.82	66.24	68.20	1.96	Peak

802.11n ht20 mode, Low Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2C_low channel 5500MHz

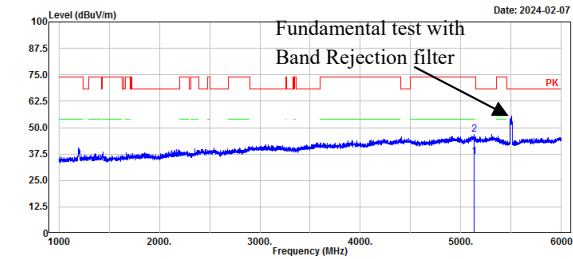

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5128.83	37.64	-1.29	36.35	54.00	17.65	Average
2	5128.83	47.98	-1.29	46.69	74.00	27.31	Peak


802.11n ht20 mode, Low Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2C_low channel 5500MHz

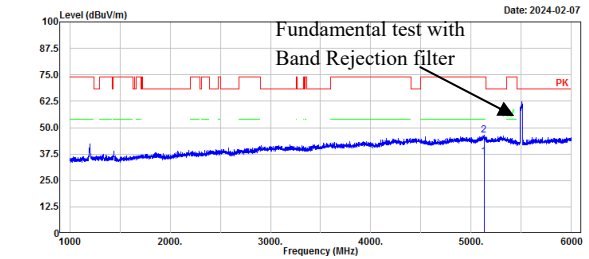


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5127.83	37.48	-1.29	36.19	54.00	17.81	Average
2	5127.83	47.73	-1.29	46.44	74.00	27.56	Peak

Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2C_low channel 5500MHz

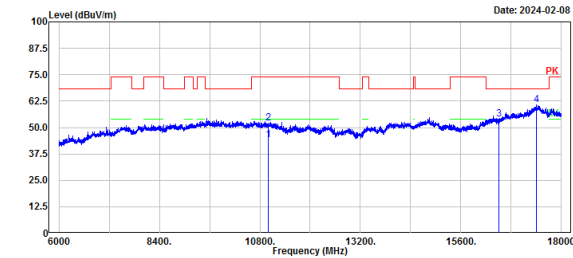

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11000.00	37.83	6.35	44.18	54.00	9.82	Average
2	11000.00	45.83	6.35	52.18	74.00	21.82	Peak
3	16500.00	44.45	9.36	53.81	68.20	14.39	Peak
4	17409.48	45.46	15.15	60.61	68.20	7.59	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2C_low channel 5500MHz

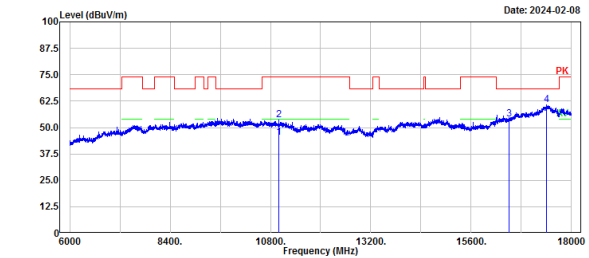

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11000.00	38.86	6.35	45.21	54.00	8.79	Average
2	11000.00	47.19	6.35	53.54	74.00	20.46	Peak
3	16500.00	44.47	9.36	53.83	68.20	14.37	Peak
4	17409.48	45.46	15.15	60.61	68.20	7.59	Peak

802.11n ht20 mode, Low Channel, Bandedge, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-N11-2C_low channel 5500MHz

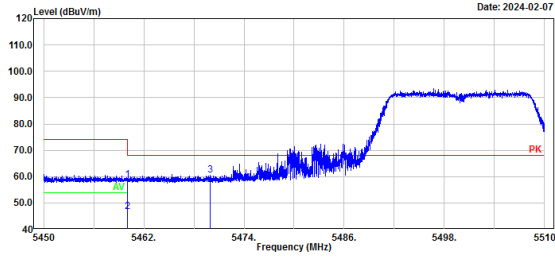

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5460.00	29.37	29.34	58.71	74.00	15.29	Peak
2	5460.00	17.26	29.34	46.60	54.00	7.40	Average
3	5470.00	31.07	29.36	60.43	68.20	7.77	Peak

802.11n ht20 mode, Low Channel, Bandedge, Vertical


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-N11-2C_low channel 5500MHz

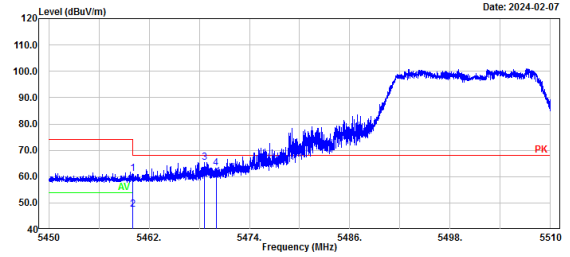

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5460.00	31.69	29.34	61.03	74.00	12.97	Peak
2	5460.00	18.12	29.34	47.46	54.00	6.54	Average
3	5468.59	36.14	29.36	65.50	68.20	2.70	Peak
4	5470.00	33.96	29.36	63.32	68.20	4.88	Peak

802.11n ht20 mode, Middle Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2C_middle channel 5580MHz

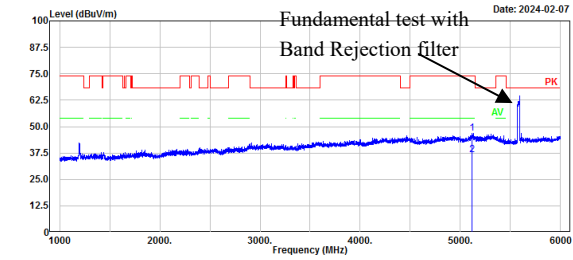

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5113.82	48.15	-1.41	46.74	74.00	27.26	Peak
2	5113.82	37.92	-1.41	36.51	54.00	17.49	Average


802.11n ht20 mode, Middle Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2C_middle channel 5580MHz

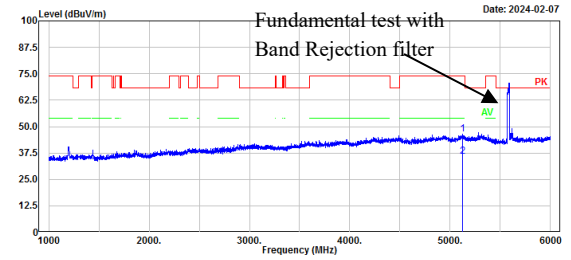


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5122.83	47.77	-1.34	46.43	74.00	27.57	Peak
2	5122.83	37.23	-1.34	35.89	54.00	18.11	Average

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2C_middle channel 5580MHz

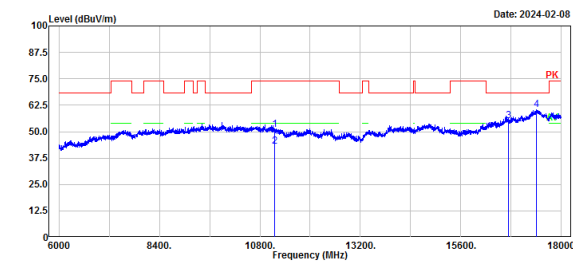

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11160.00	45.09	5.91	51.00	74.00	23.00	Peak
2	11160.00	36.94	5.91	42.85	54.00	11.15	Average
3	16740.00	44.36	10.64	55.00	68.20	13.20	Peak
4	17402.28	45.14	15.10	60.24	68.20	7.96	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2C_middle channel 5580MHz

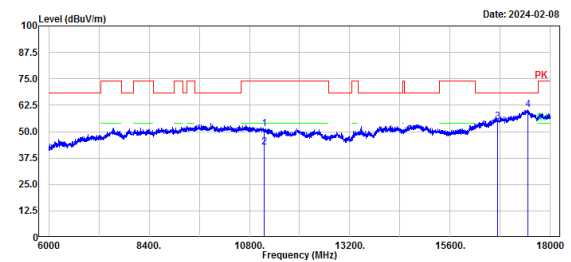

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11160.00	45.30	5.91	51.21	74.00	22.79	Peak
2	11160.00	36.76	5.91	42.67	54.00	11.33	Average
3	16740.00	44.24	10.64	54.88	68.20	13.32	Peak
4	17450.29	44.82	15.48	60.30	68.20	7.90	Peak

802.11n ht20 mode, High Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2C_high channel 5700MHz

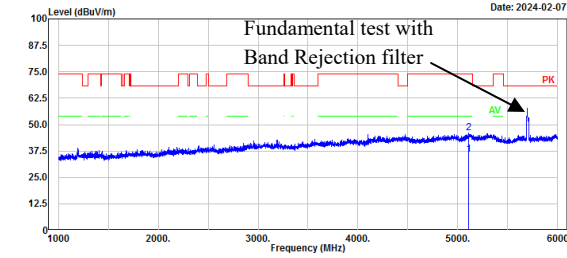

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5105.82	37.39	-1.48	35.91	54.00	18.09	Average
2	5105.82	47.40	-1.48	45.92	74.00	28.08	Peak


802.11n ht20 mode, High Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2C_high channel 5700MHz

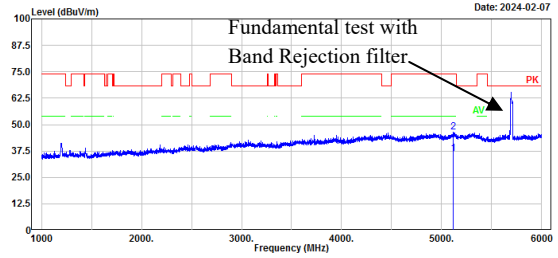


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5116.82	37.44	-1.39	36.05	54.00	17.95	Average
2	5116.82	47.71	-1.39	46.32	74.00	27.68	Peak

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2C_high channel 5700MHz

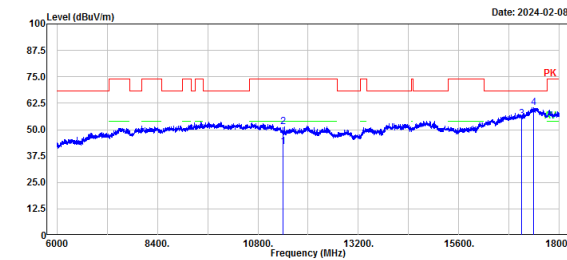

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11400.00	37.69	4.33	42.02	54.00	11.98	Average
2	11400.00	46.93	4.33	51.26	74.00	22.74	Peak
3	17100.00	42.39	12.80	55.19	68.20	13.01	Peak
4	17380.68	45.60	14.92	60.52	68.20	7.68	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-2C_high channel 5700MHz

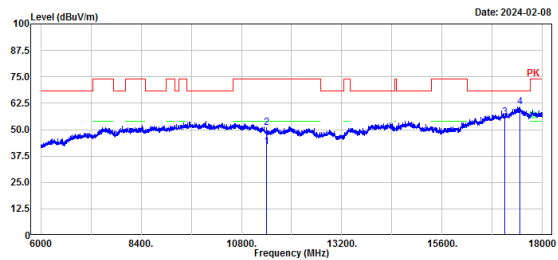

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11400.00	37.67	4.33	42.00	54.00	12.00	Average
2	11400.00	46.60	4.33	50.93	74.00	23.07	Peak
3	17100.00	43.20	12.80	56.00	68.20	12.20	Peak
4	17450.29	45.18	15.48	60.66	68.20	7.54	Peak

802.11n ht20 mode, High Channel, Bandedge,
Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
Polarization: Horizontal Tester: Colin Yang
Test Mode: Transmitting
Note: 802.11n20_U-NII-2C_hgh channel 5700MHz

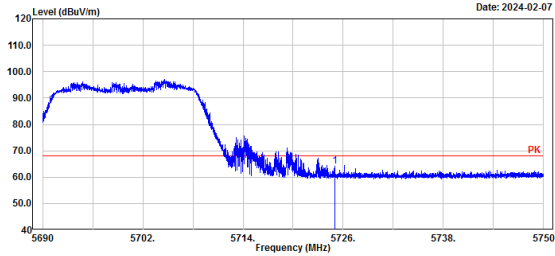

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.00	34.30	29.81	64.11	68.20	4.09	Peak

802.11n ht20 mode, High Channel, Bandedge,
Vertical


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
Polarization: Horizontal Tester: Colin Yang
Test Mode: Transmitting
Note: 802.11n20_U-NII-2C_hgh channel 5700MHz

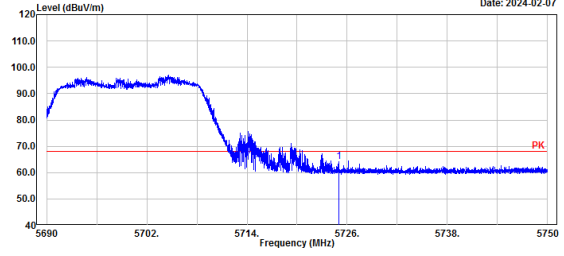

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.00	34.30	29.81	64.11	68.20	4.09	Peak

802.11n ht40 mode, Low Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-2C_low channel 5510MHz

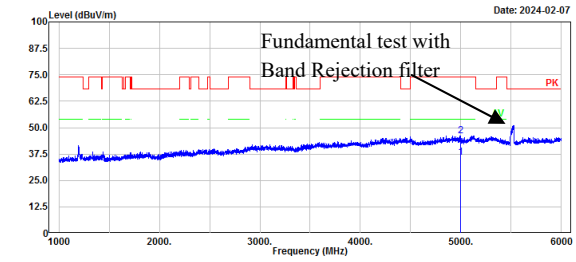

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4998.80	37.80	-2.12	35.68	54.00	18.32	Average
2	4998.80	48.29	-2.12	46.17	74.00	27.83	Peak


802.11n ht40 mode, Low Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-2C_low channel 5510MHz

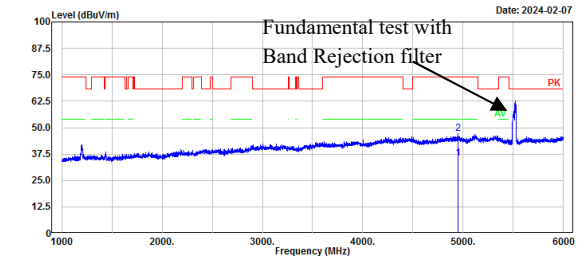


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4947.79	37.99	-2.42	35.57	54.00	18.43	Average
2	4947.79	49.44	-2.42	47.02	74.00	26.98	Peak

Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-2C_low channel 5510MHz

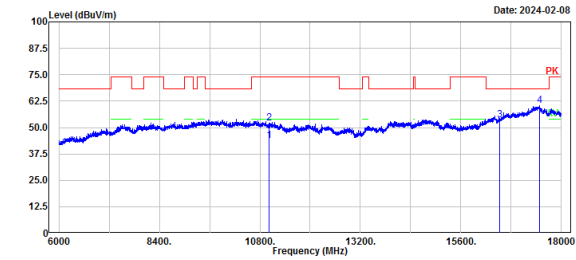

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11020.00	37.31	6.30	43.61	54.00	10.39	Average
2	11020.00	45.64	6.30	51.94	74.00	22.06	Peak
3	16530.00	44.00	9.54	53.54	68.20	14.66	Peak
4	17471.89	44.84	15.65	60.49	68.20	7.71	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-2C_low channel 5510MHz

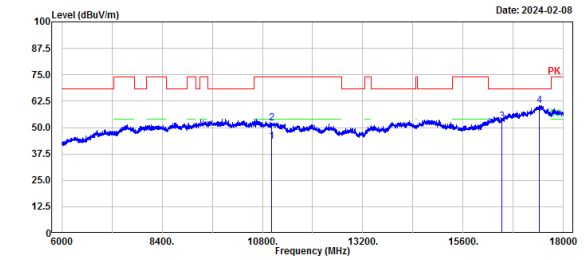

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11020.00	37.21	6.30	43.51	54.00	10.49	Average
2	11020.00	45.88	6.30	52.18	74.00	21.82	Peak
3	16530.00	43.30	9.54	52.84	68.20	15.36	Peak
4	17426.29	45.12	15.28	60.40	68.20	7.80	Peak

802.11n ht40 mode, Low Channel, Bandedge, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-N11-2C_low channel 5510MHz

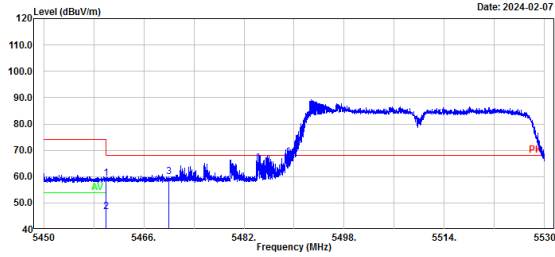

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5460.00	29.89	29.34	59.23	74.00	14.77	Peak
2	5460.00	17.35	29.34	46.69	54.00	7.31	Average
3	5470.00	30.70	29.36	60.06	68.20	8.14	Peak

802.11n ht40 mode, Low Channel, Bandedge, Vertical


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-N11-2C_low channel 5510MHz

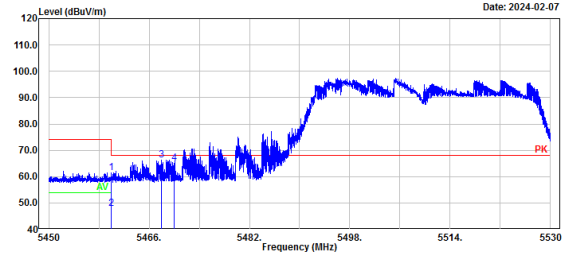

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5460.00	32.00	29.34	61.34	74.00	12.66	Peak
2	5460.00	18.42	29.34	47.76	54.00	6.24	Average
3	5467.99	36.87	29.36	66.23	68.20	1.97	Peak
4	5470.00	35.68	29.36	65.04	68.20	3.16	Peak

802.11n ht40 mode, Middle Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-2C_middle channel 5550MHz

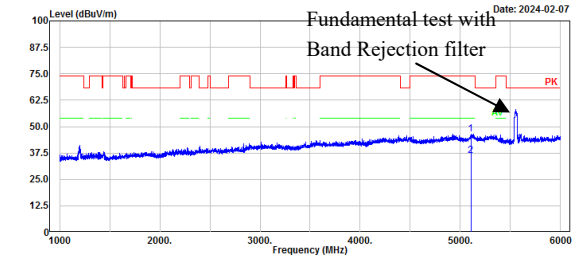

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5103.82	48.03	-1.50	46.53	74.00	27.47	Peak
2	5103.82	37.61	-1.50	36.11	54.00	17.89	Average


802.11n ht40 mode, Middle Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-2C_middle channel 5550MHz

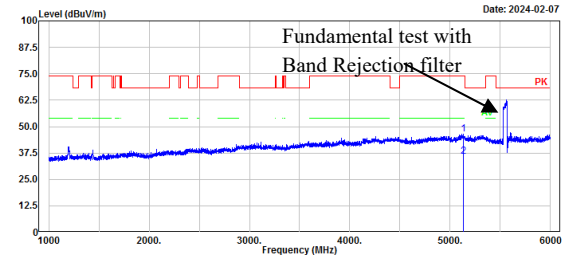


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5131.83	47.84	-1.27	46.57	74.00	27.43	Peak
2	5131.83	37.19	-1.27	35.92	54.00	18.08	Average

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-2C_middle channel 5550MHz

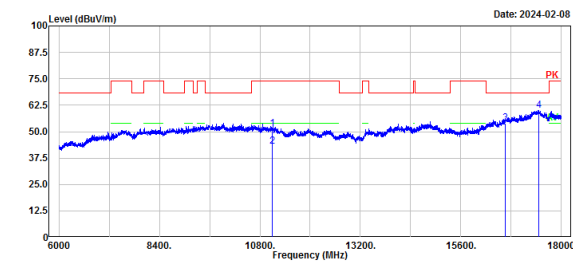

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11100.00	45.38	6.09	51.47	74.00	22.53	Peak
2	11100.00	36.94	6.09	43.03	54.00	10.97	Average
3	16650.00	43.90	10.19	54.09	68.20	14.11	Peak
4	17459.89	44.46	15.55	60.01	68.20	8.19	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-2C_middle channel 5550MHz

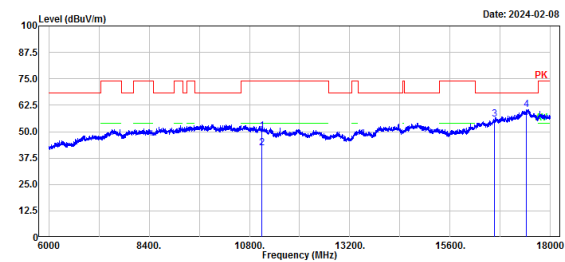

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11100.00	44.26	6.09	50.35	74.00	23.65	Peak
2	11100.00	36.18	6.09	42.27	54.00	11.73	Average
3	16650.00	45.69	10.19	55.88	68.20	12.32	Peak
4	17419.08	45.15	15.23	60.38	68.20	7.82	Peak

802.11n ht40 mode, High Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-2C_high channel 5670MHz

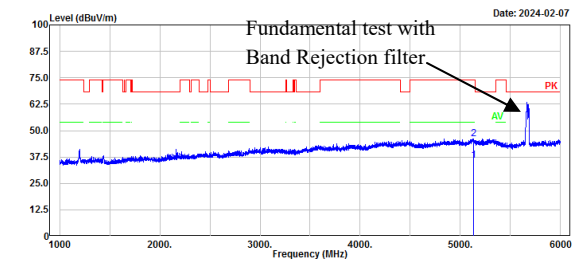

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5128.83	37.26	-1.29	35.97	54.00	18.03	Average
2	5128.83	47.50	-1.29	46.21	74.00	27.79	Peak


802.11n ht40 mode, High Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-2C_high channel 5670MHz

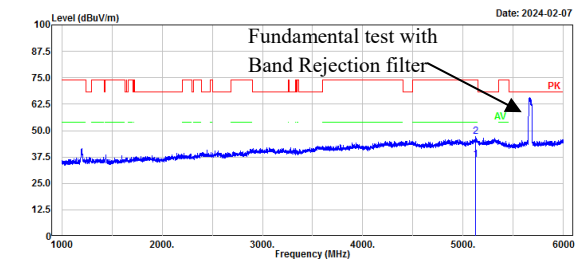


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5120.82	37.76	-1.36	36.40	54.00	17.60	Average
2	5120.82	48.47	-1.36	47.11	74.00	26.89	Peak

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-2C_high channel 5670MHz

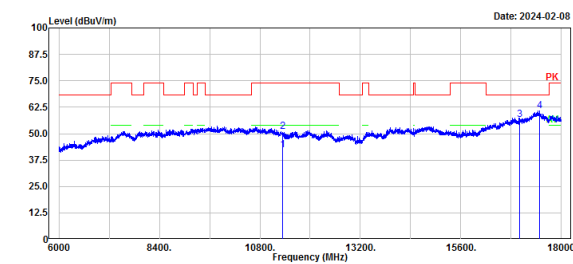

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11340.00	37.35	4.83	42.18	54.00	11.82	Average
2	11340.00	45.94	4.83	50.77	74.00	23.23	Peak
3	17010.00	44.48	12.00	56.48	68.20	11.72	Peak
4	17483.90	45.06	15.74	60.80	68.20	7.40	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-2C_high channel 5670MHz

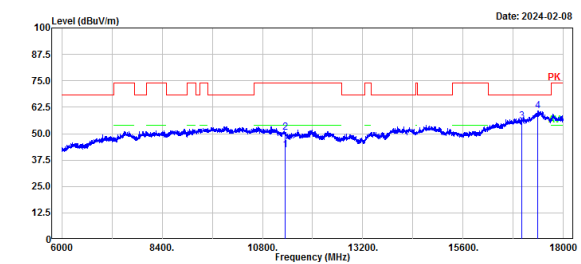

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11340.00	37.52	4.83	42.35	54.00	11.65	Average
2	11340.00	45.56	4.83	50.39	74.00	23.61	Peak
3	17010.00	44.01	12.00	56.01	68.20	12.19	Peak
4	17378.28	45.77	14.90	60.67	68.20	7.53	Peak

802.11n ht40 mode, High Channel, Bandedge,
Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
Polarization: Horizontal Tester: Colin Yang
Test Mode: Transmitting
Note: 802.11n40_U-III-2C_high channel 5670MHz

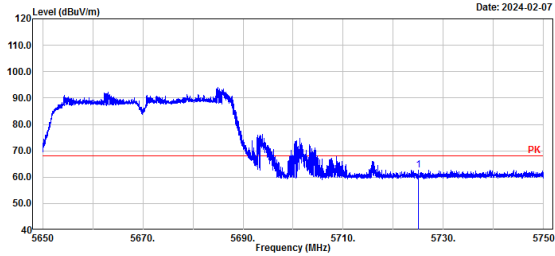

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.00	32.84	29.81	62.65	68.20	5.55	Peak

802.11n ht40 mode, High Channel, Bandedge,
Vertical


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
Polarization: Vertical Tester: Colin Yang
Test Mode: Transmitting
Note: 802.11n40_U-III-2C_high channel 5670MHz

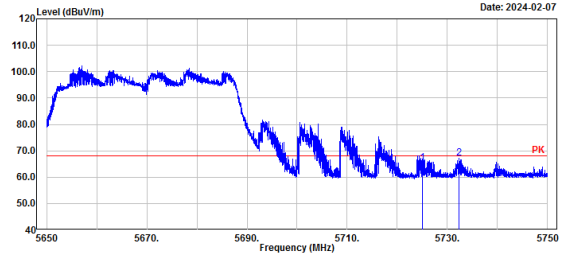

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.00	35.65	29.81	65.46	68.20	2.74	Peak
2	5732.32	37.28	29.82	67.10	68.20	1.10	Peak

802.11ac80 mode, Low Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-2C_low channel 5530MHz

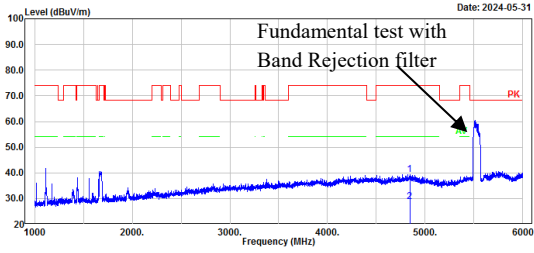

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4842.00	49.36	-10.07	39.29	74.00	34.71	Peak
2	4842.00	38.76	-10.07	28.69	54.00	25.31	Average


802.11ac80 mode, Low Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-2C_low channel 5530MHz

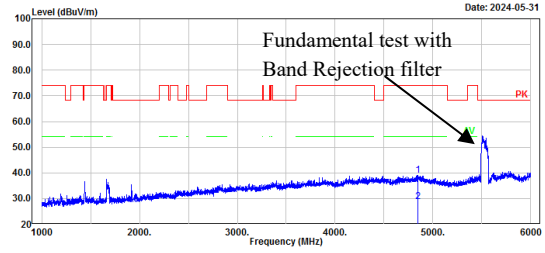


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4846.00	49.11	-10.06	39.05	74.00	34.95	Peak
2	4846.00	38.67	-10.06	28.61	54.00	25.39	Average

Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-2C_low channel 5530MHz

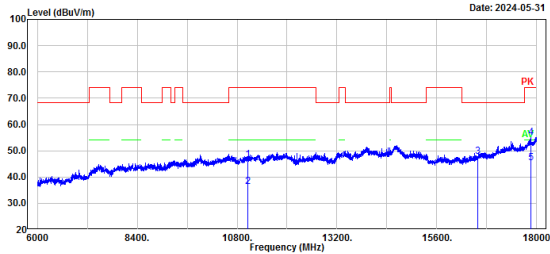

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11060.00	45.72	0.92	46.64	74.00	27.36	Peak
2	11060.00	35.32	0.92	36.24	54.00	17.76	Average
3	16590.00	46.06	1.69	47.75	68.20	20.45	Peak
4	17856.00	47.89	7.15	55.04	74.00	18.96	Peak
5	17856.00	38.22	7.15	45.37	54.00	8.63	Average


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-2C_low channel 5530MHz

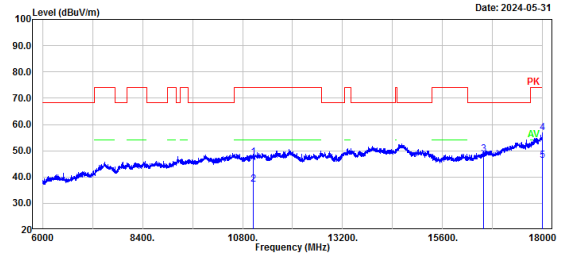

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11059.20	46.60	0.92	47.52	74.00	26.48	Peak
2	11059.20	36.26	0.92	37.18	54.00	16.82	Average
3	16590.00	46.91	1.69	48.60	68.20	19.60	Peak
4	17988.00	48.76	8.06	56.82	74.00	17.18	Peak
5	17988.00	38.33	8.06	46.39	54.00	7.61	Average

802.11ac80 mode, Low Channel, Bandedge, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-2C_low channel 5538MHz

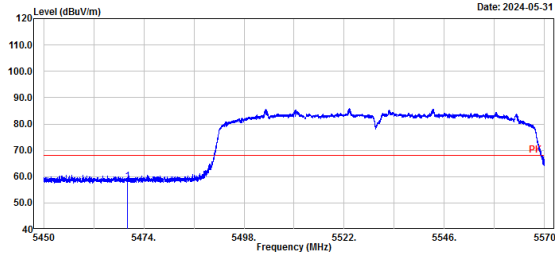

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.00	28.87	29.36	58.23	68.20	9.97	Peak

802.11ac80 mode, Low Channel, Bandedge, Vertical


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-2C_low channel 5538MHz

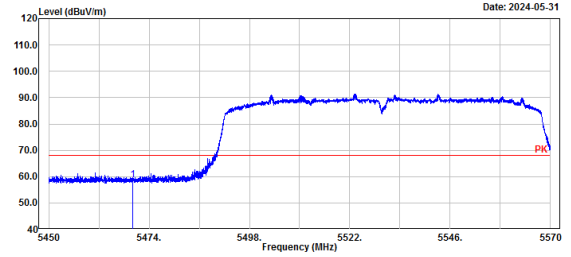

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.00	29.44	29.36	58.80	68.20	9.40	Peak

802.11ac80 mode, High Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-2C_high channel 5610MHz

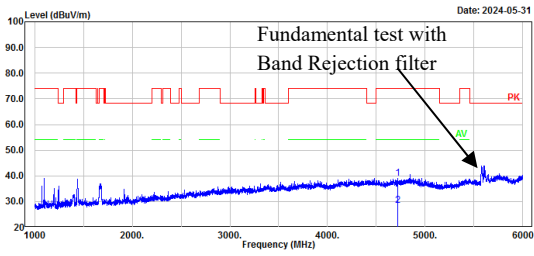

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4719.00	49.07	-10.09	38.98	74.00	35.02	Peak
2	4719.00	38.41	-10.09	28.32	54.00	25.68	Average


802.11ac80 mode, High Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-2C_high channel 5610MHz

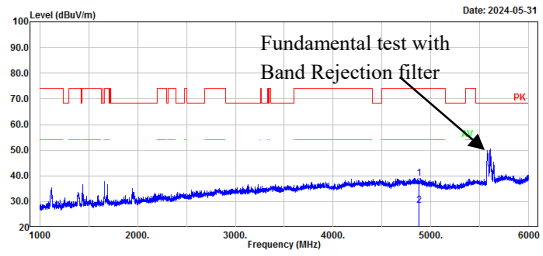


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4880.00	49.00	-10.01	38.99	74.00	35.01	Peak
2	4880.00	38.35	-10.01	28.34	54.00	25.66	Average

Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-2C_high channel 5610MHz

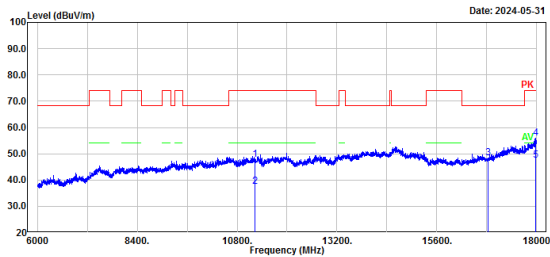

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11220.00	46.56	1.35	47.91	74.00	26.09	Peak
2	11220.00	36.23	1.35	37.58	54.00	16.42	Average
3	16830.00	45.31	2.95	48.26	68.20	19.94	Peak
4	17978.40	48.06	8.00	56.06	74.00	17.94	Peak
5	17978.40	39.39	8.00	47.39	54.00	6.61	Average


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-2C_high channel 5610MHz

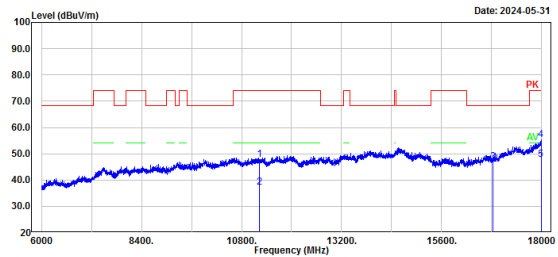

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11220.00	46.31	1.35	47.66	74.00	26.34	Peak
2	11220.00	35.78	1.35	37.13	54.00	16.87	Average
3	16830.00	43.96	2.95	46.91	68.20	21.29	Peak
4	17983.20	47.43	8.03	55.46	74.00	18.54	Peak
5	17983.20	39.85	8.03	47.88	54.00	6.12	Average

802.11ac80 mode, High Channel, Bandedge, Horizontal


Project No.: XMDN231122-69423E-RF
 Polarization: Horizontal
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-2C_high channel 5610MHz
 Serial No.: 2E81-3
 Tester: Colin Yang

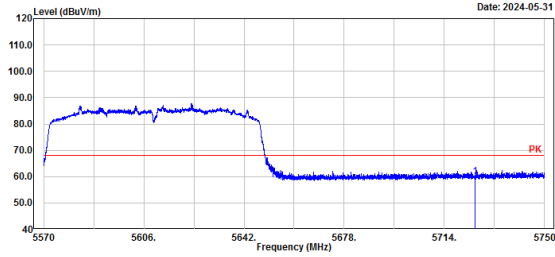

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.00	29.99	29.81	59.80	68.20	8.40	Peak

802.11ac80 mode, High Channel, Bandedge, Vertical

Project No.: XMDN231122-69423E-RF
 Polarization: Vertical
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-2C_high channel 5610MHz
 Serial No.: 2E81-3
 Tester: Colin Yang

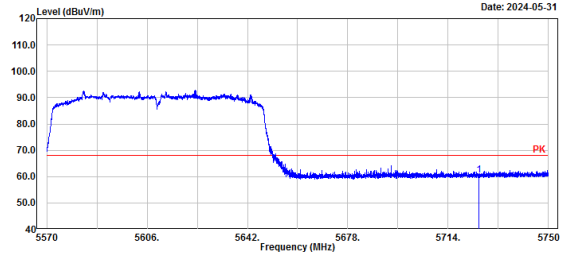


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.00	30.65	29.81	60.46	68.20	7.74	Peak

5725-5850MHz:

802.11a mode, Low Channel, Horizontal		802.11a mode, Low Channel, Vertical																																																																																	
Project No.: XMDN231122-69423E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11a_U-NII-3_low channel 5745MHz Serial No.: 2EB1-3 Tester: Colin Yang Date: 2024-02-08		Project No.: XMDN231122-69423E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11a_U-NII-3_low channel 5745MHz Serial No.: 2EB1-3 Tester: Colin Yang Date: 2024-02-08																																																																																	
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Result (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5117.824</td> <td>37.19</td> <td>-1.39</td> <td>35.80</td> <td>54.00</td> <td>18.20</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5117.824</td> <td>47.60</td> <td>-1.39</td> <td>46.21</td> <td>74.00</td> <td>27.79</td> <td>Peak</td> </tr> </tbody> </table>		No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	5117.824	37.19	-1.39	35.80	54.00	18.20	Average	2	5117.824	47.60	-1.39	46.21	74.00	27.79	Peak	<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Result (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5115.823</td> <td>37.63</td> <td>-1.40</td> <td>36.23</td> <td>54.00</td> <td>17.77</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5115.823</td> <td>47.86</td> <td>-1.40</td> <td>46.46</td> <td>74.00</td> <td>27.54</td> <td>Peak</td> </tr> </tbody> </table>		No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	5115.823	37.63	-1.40	36.23	54.00	17.77	Average	2	5115.823	47.86	-1.40	46.46	74.00	27.54	Peak																																
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																																																																												
1	5117.824	37.19	-1.39	35.80	54.00	18.20	Average																																																																												
2	5117.824	47.60	-1.39	46.21	74.00	27.79	Peak																																																																												
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																																																																												
1	5115.823	37.63	-1.40	36.23	54.00	17.77	Average																																																																												
2	5115.823	47.86	-1.40	46.46	74.00	27.54	Peak																																																																												
Project No.: XMDN231122-69423E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11a_U-NII-3_low channel 5745MHz Serial No.: 2EB1-3 Tester: Colin Yang Date: 2024-02-08		Project No.: XMDN231122-69423E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11a_U-NII-3_low channel 5745MHz Serial No.: 2EB1-3 Tester: Colin Yang Date: 2024-02-08																																																																																	
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Result (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.000</td> <td>38.36</td> <td>4.23</td> <td>42.59</td> <td>54.00</td> <td>11.41</td> <td>Average</td> </tr> <tr> <td>2</td> <td>11490.000</td> <td>46.60</td> <td>4.23</td> <td>50.83</td> <td>74.00</td> <td>23.17</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>17235.000</td> <td>43.26</td> <td>13.75</td> <td>57.01</td> <td>68.20</td> <td>11.19</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>17476.700</td> <td>44.58</td> <td>15.68</td> <td>60.26</td> <td>68.20</td> <td>7.94</td> <td>Peak</td> </tr> </tbody> </table>		No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11490.000	38.36	4.23	42.59	54.00	11.41	Average	2	11490.000	46.60	4.23	50.83	74.00	23.17	Peak	3	17235.000	43.26	13.75	57.01	68.20	11.19	Peak	4	17476.700	44.58	15.68	60.26	68.20	7.94	Peak	<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Result (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.000</td> <td>43.32</td> <td>4.23</td> <td>47.55</td> <td>54.00</td> <td>6.45</td> <td>Average</td> </tr> <tr> <td>2</td> <td>11490.000</td> <td>51.42</td> <td>4.23</td> <td>55.65</td> <td>74.00</td> <td>18.35</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>17235.000</td> <td>43.25</td> <td>13.75</td> <td>57.00</td> <td>68.20</td> <td>11.20</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>17414.280</td> <td>46.18</td> <td>15.19</td> <td>61.37</td> <td>68.20</td> <td>6.83</td> <td>Peak</td> </tr> </tbody> </table>		No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11490.000	43.32	4.23	47.55	54.00	6.45	Average	2	11490.000	51.42	4.23	55.65	74.00	18.35	Peak	3	17235.000	43.25	13.75	57.00	68.20	11.20	Peak	4	17414.280	46.18	15.19	61.37	68.20	6.83	Peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																																																																												
1	11490.000	38.36	4.23	42.59	54.00	11.41	Average																																																																												
2	11490.000	46.60	4.23	50.83	74.00	23.17	Peak																																																																												
3	17235.000	43.26	13.75	57.01	68.20	11.19	Peak																																																																												
4	17476.700	44.58	15.68	60.26	68.20	7.94	Peak																																																																												
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																																																																												
1	11490.000	43.32	4.23	47.55	54.00	6.45	Average																																																																												
2	11490.000	51.42	4.23	55.65	74.00	18.35	Peak																																																																												
3	17235.000	43.25	13.75	57.00	68.20	11.20	Peak																																																																												
4	17414.280	46.18	15.19	61.37	68.20	6.83	Peak																																																																												

802.11a mode, Low Channel, Bandedge, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-3_low channel 5745MHz

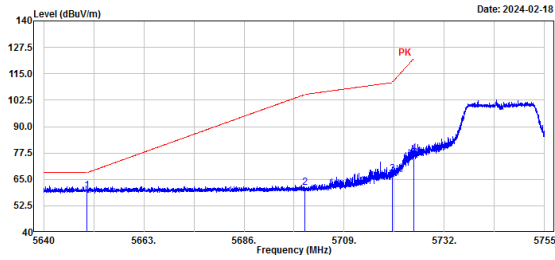

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5650.000	30.03	29.70	59.73	68.20	8.47	Peak
2	5700.000	31.38	29.77	61.15	105.20	44.05	Peak
3	5720.000	37.70	29.80	67.50	110.80	43.30	Peak
4	5725.000	47.51	29.81	77.32	122.20	44.88	Peak

802.11a mode, Low Channel, Bandedge, Vertical


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-3_low channel 5745MHz

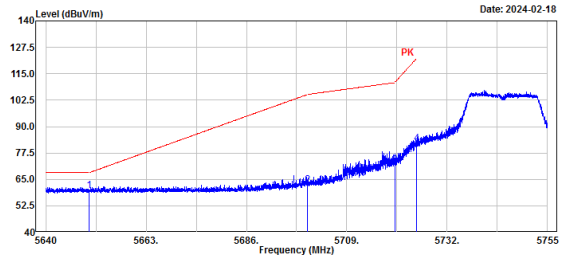

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5650.000	29.92	29.70	59.62	68.20	8.58	Peak
2	5700.000	32.64	29.77	62.41	105.20	42.79	Peak
3	5720.000	42.09	29.80	71.89	110.80	38.91	Peak
4	5725.000	52.24	29.81	82.05	122.20	40.15	Peak

802.11a mode, Middle Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-3_middle channel 5785MHz

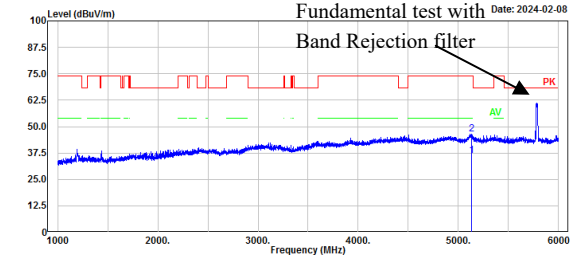

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5131.826	37.35	-1.27	36.08	54.00	17.92	Average
2	5131.826	47.83	-1.27	46.56	74.00	27.44	Peak


802.11a mode, Middle Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-3_middle channel 5785MHz

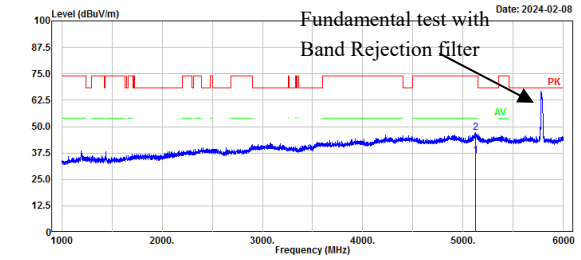


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5120.824	37.65	-1.36	36.29	54.00	17.71	Average
2	5120.824	48.36	-1.36	47.00	74.00	27.00	Peak

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-3_middle channel 5785MHz

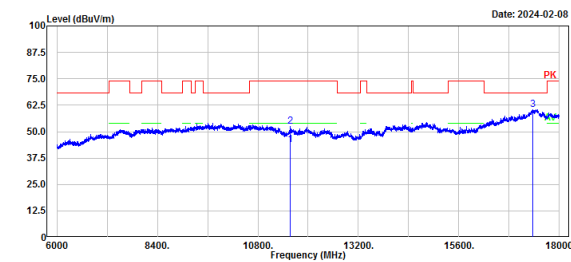

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11570.000	39.17	4.44	43.61	54.00	10.39	Average
2	11570.000	47.94	4.44	52.38	74.00	21.62	Peak
3	17355.000	45.83	14.70	60.53	68.20	7.67	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-3_middle channel 5785MHz

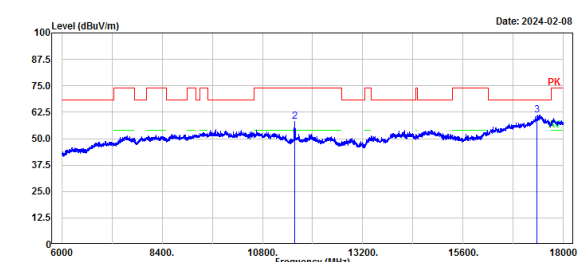

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11570.000	45.25	4.44	49.69	54.00	4.31	Average
2	11570.000	53.51	4.44	57.95	74.00	16.05	Peak
3	17355.000	46.61	14.70	61.31	68.20	6.89	Peak

802.11a mode, High Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-3_high channel 5825MHz

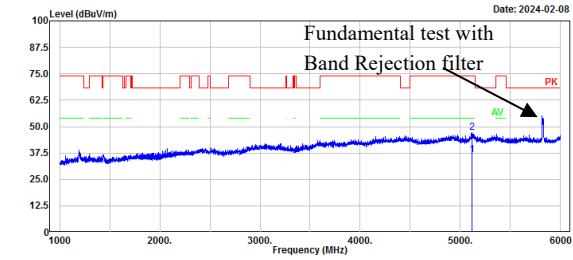

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5117.824	37.96	-1.39	36.57	54.00	17.43	Average
2	5117.824	48.64	-1.39	47.25	74.00	26.75	Peak


802.11a mode, High Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-3_high channel 5825MHz

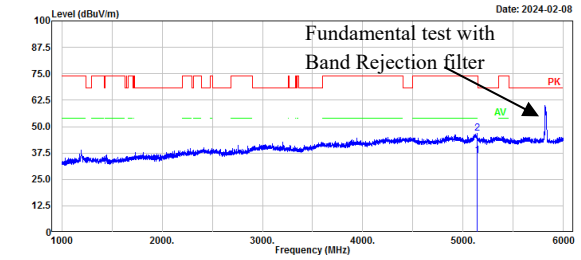


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5135.827	37.62	-1.23	36.39	54.00	17.61	Average
2	5135.827	48.05	-1.23	46.82	74.00	27.18	Peak

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-3_high channel 5825MHz

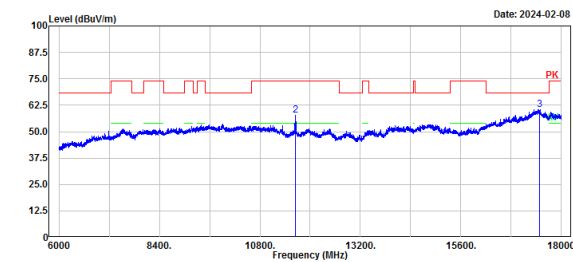

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11650.000	45.18	4.52	49.70	54.00	4.30	Average
2	11650.000	53.03	4.52	57.55	74.00	16.45	Peak
3	17475.000	44.82	15.67	60.49	68.20	7.71	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-3_high channel 5825MHz

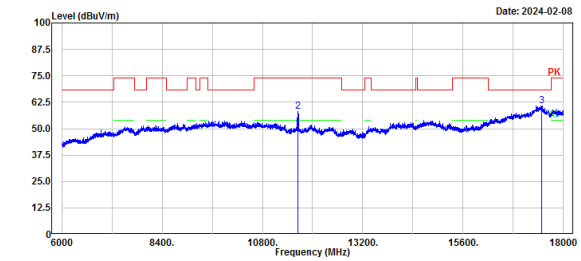

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11650.000	45.15	4.52	49.67	54.00	-4.33	Average
2	11650.000	53.61	4.52	58.13	74.00	15.87	Peak
3	17475.000	45.20	15.67	60.87	68.20	7.33	Peak

802.11a mode, High Channel, Bandedge, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-3_high channel 5825MHz

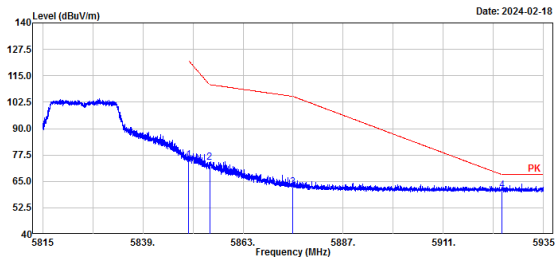

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	45.22	29.99	75.21	122.20	46.99	Peak
2	5855.000	43.92	30.00	73.92	110.80	36.88	Peak
3	5875.000	32.14	30.03	62.17	105.20	43.03	Peak
4	5925.000	30.71	30.10	60.81	68.20	7.39	Peak

802.11a mode, High Channel, Bandedge, Vertical


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11a_U-NII-3_high channel 5825MHz

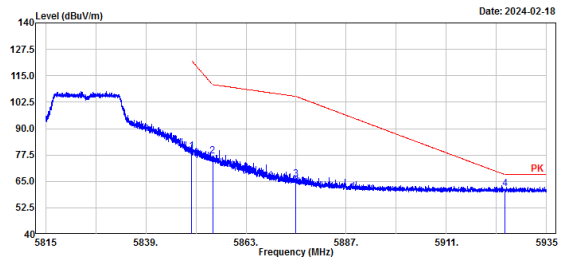

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	49.19	29.99	79.18	122.20	43.02	Peak
2	5855.000	46.94	30.00	76.94	110.80	33.86	Peak
3	5875.000	35.83	30.03	65.86	105.20	39.34	Peak
4	5925.000	31.29	30.10	61.39	68.20	6.81	Peak

802.11n ht20 mode, Low Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-3_low channel 5745MHz

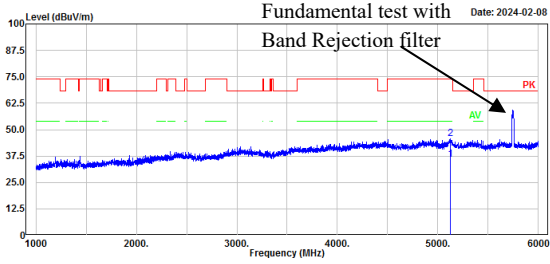

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5122.825	37.28	-1.34	35.94	54.00	18.06	Average
2	5122.825	47.14	-1.34	45.80	74.00	28.20	Peak


802.11n ht20 mode, Low Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-3_low channel 5745MHz

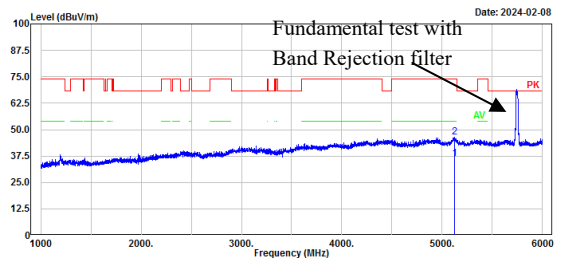


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5126.825	37.49	-1.30	36.19	54.00	17.81	Average
2	5126.825	47.85	-1.30	46.55	74.00	27.45	Peak

Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-3_low channel 5745MHz

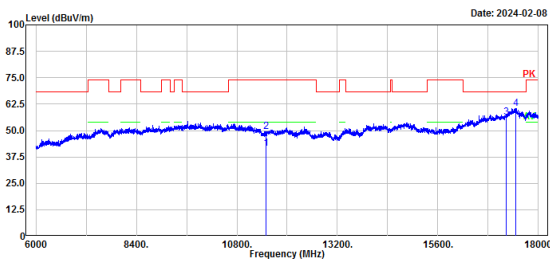

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11490.000	37.38	4.23	41.61	54.00	12.39	Average
2	11490.000	45.23	4.23	49.46	74.00	24.54	Peak
3	17235.000	42.39	13.75	56.14	68.20	12.06	Peak
4	17450.290	44.87	15.48	60.35	68.20	7.85	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-3_low channel 5745MHz

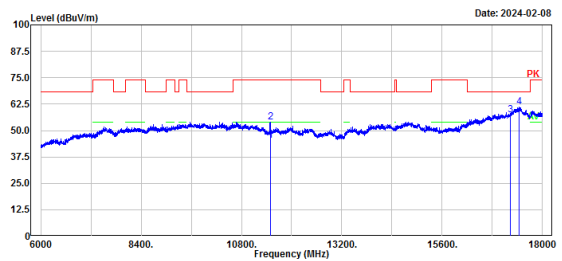

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11490.000	41.15	4.23	45.38	54.00	8.62	Average
2	11490.000	49.87	4.23	54.10	74.00	19.90	Peak
3	17235.000	43.43	13.75	57.18	68.20	11.02	Peak
4	17447.890	45.54	15.45	60.99	68.20	7.21	Peak

802.11n ht20 mode, Low Channel, Bandedge, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-3_low channel 5745MHz

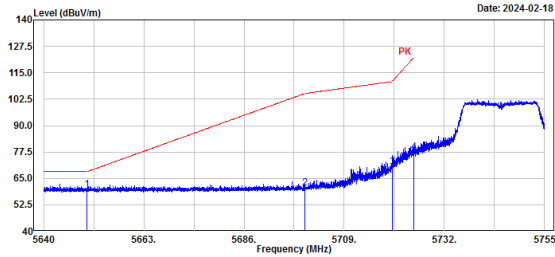

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5650.000	29.81	29.70	59.51	68.20	8.69	Peak
2	5700.000	30.57	29.77	60.34	105.20	44.86	Peak
3	5720.000	40.44	29.80	70.24	110.80	40.56	Peak
4	5725.000	47.45	29.81	77.26	122.20	44.94	Peak

802.11n ht20 mode, Low Channel, Bandedge, Vertical


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-3_low channel 5745MHz

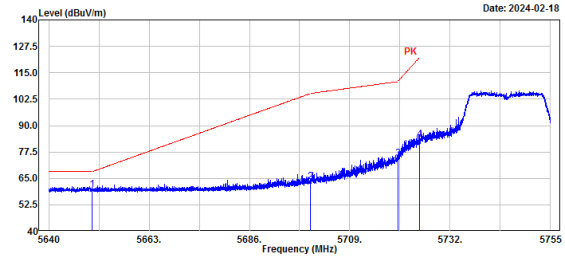

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5650.000	29.93	29.70	59.63	68.20	8.57	Peak
2	5700.000	33.63	29.77	63.40	105.20	41.80	Peak
3	5720.000	44.71	29.80	74.51	110.80	36.29	Peak
4	5725.000	53.60	29.81	83.41	122.20	38.79	Peak

802.11n ht20 mode, Middle Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-3_middle channel 5785MHz

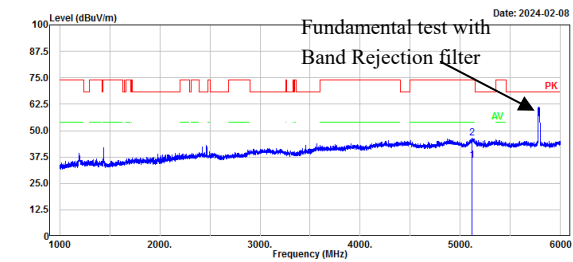

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5114.823	37.15	-1.41	35.74	54.00	18.26	Average
2	5114.823	47.77	-1.41	46.36	74.00	27.64	Peak


802.11n ht20 mode, Middle Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-3_middle channel 5785MHz

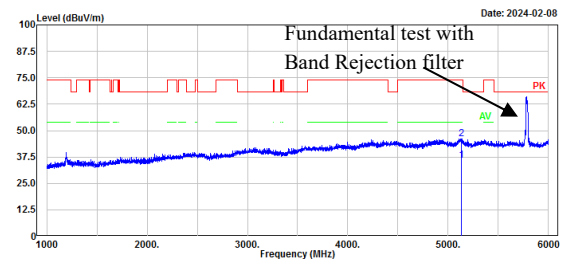


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5133.827	37.17	-1.24	35.93	54.00	18.07	Average
2	5133.827	47.38	-1.24	46.14	74.00	27.86	Peak

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-3_middle channel 5785MHz

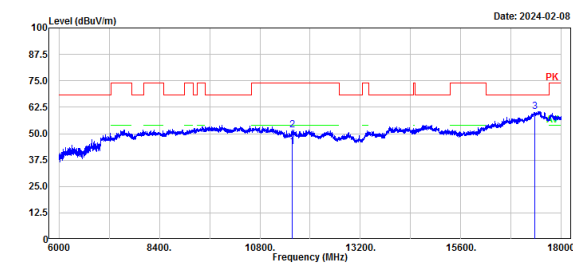

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11570.000	39.15	4.44	43.59	54.00	10.41	Average
2	11570.000	47.23	4.44	51.67	74.00	22.33	Peak
3	17355.000	45.81	14.70	60.51	68.20	7.69	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-3_middle channel 5785MHz

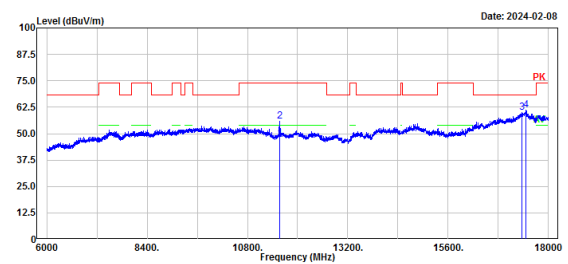

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11570.000	43.24	4.44	47.68	54.00	6.32	Average
2	11570.000	51.26	4.44	55.70	74.00	18.30	Peak
3	17355.000	45.17	14.70	59.87	68.20	8.33	Peak
4	17450.290	45.56	15.48	61.04	68.20	7.16	Peak

802.11n ht20 mode, High Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-3_high channel 5825MHz

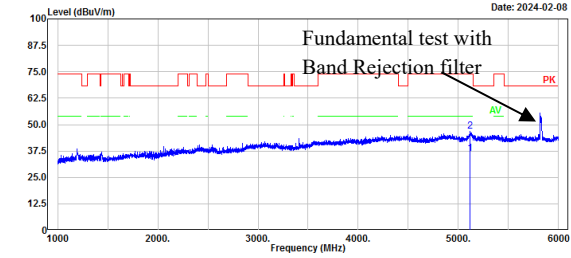

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5117.824	37.54	-1.39	36.15	54.00	17.85	Average
2	5117.824	48.16	-1.39	46.77	74.00	27.23	Peak


802.11n ht20 mode, High Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-3_high channel 5825MHz

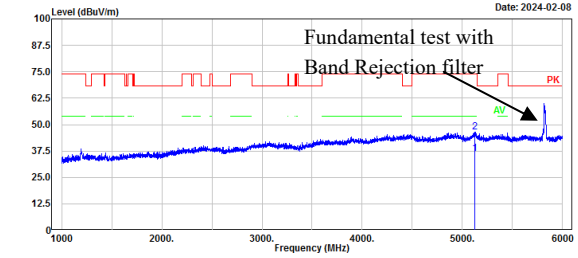


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5122.825	37.41	-1.34	36.07	54.00	17.93	Average
2	5122.825	47.78	-1.34	46.44	74.00	27.56	Peak

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-3_high channel 5825MHz

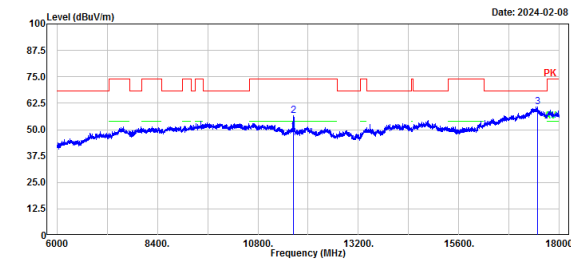

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11650.000	44.69	4.52	49.21	54.00	4.79	Average
2	11650.000	52.01	4.52	56.53	74.00	17.47	Peak
3	17475.000	45.02	15.67	60.69	68.20	7.51	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-3_high channel 5825MHz

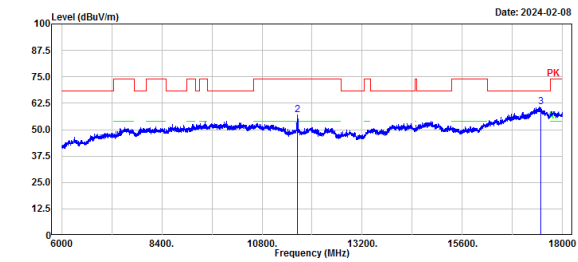

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11650.000	44.89	4.52	49.41	54.00	4.59	Average
2	11650.000	52.32	4.52	56.84	74.00	17.16	Peak
3	17475.000	45.09	15.67	60.76	68.20	7.44	Peak

802.11n ht20 mode, High Channel, Bandedge, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-3_high channel 5825MHz

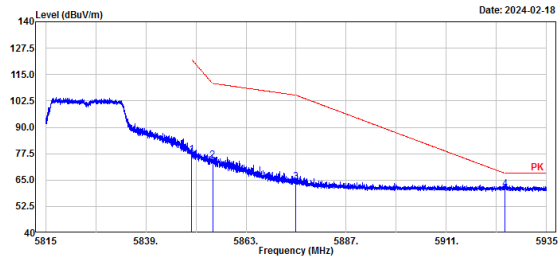

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	46.91	29.99	76.90	122.20	45.30	Peak
2	5855.000	44.35	30.00	74.35	110.80	36.45	Peak
3	5875.000	34.08	30.03	64.11	105.20	41.09	Peak
4	5925.000	30.63	30.10	60.73	68.20	7.47	Peak

802.11n ht20 mode, High Channel, Bandedge, Vertical


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n20_U-NII-3_high channel 5825MHz

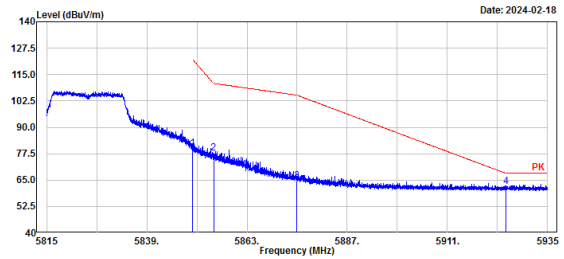

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	49.97	29.99	79.96	122.20	42.24	Peak
2	5855.000	47.88	30.00	77.88	110.80	32.92	Peak
3	5875.000	34.49	30.03	64.52	105.20	40.68	Peak
4	5925.000	31.73	30.10	61.83	68.20	6.37	Peak

802.11n ht40 mode, Low Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-3_low channel 5755MHz

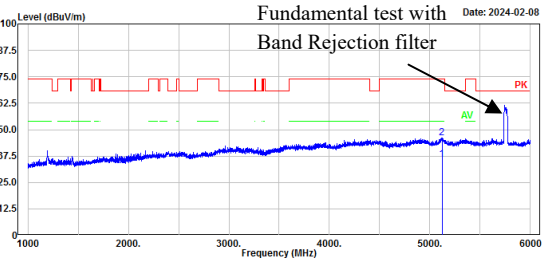

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5119.824	37.24	-1.36	35.88	54.00	18.12	Average
2	5119.824	47.50	-1.36	46.14	74.00	27.86	Peak


802.11n ht40 mode, Low Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-3_low channel 5755MHz

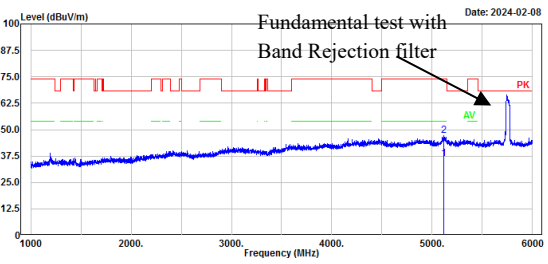


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5116.823	37.53	-1.39	36.14	54.00	17.86	Average
2	5116.823	48.48	-1.39	47.09	74.00	26.91	Peak

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-3_low channel 5755MHz

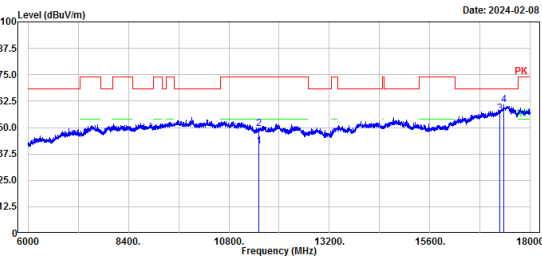

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11510.000	36.87	4.25	41.12	54.00	12.88	Average
2	11510.000	45.00	4.25	49.25	74.00	24.75	Peak
3	17265.000	42.58	13.97	56.55	68.20	11.65	Peak
4	17366.270	45.96	14.80	60.76	68.20	7.44	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-3_low channel 5755MHz

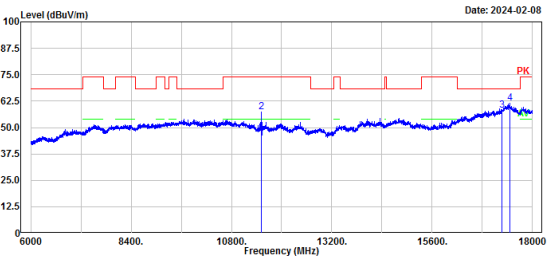

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11510.000	40.54	4.25	44.79	54.00	9.21	Average
2	11510.000	53.10	4.25	57.35	74.00	16.65	Peak
3	17265.000	44.27	13.97	58.24	68.20	9.96	Peak
4	17464.690	46.04	15.59	61.63	68.20	6.57	Peak

802.11n ht40 mode, Low Channel, Bandedge, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-N11-3_low channel 5755MHz

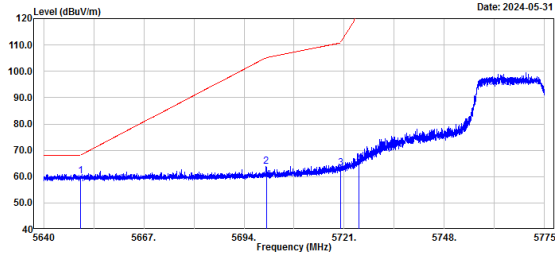

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5650.00	30.51	29.69	60.20	68.20	8.00	Peak
2	5700.00	34.00	29.77	63.77	105.20	41.43	Peak
3	5720.00	33.30	29.80	63.10	110.80	47.70	Peak
4	5725.00	34.86	29.81	64.67	122.19	57.52	Peak

802.11n ht40 mode, Low Channel, Bandedge, Vertical


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-N11-3_low channel 5755MHz

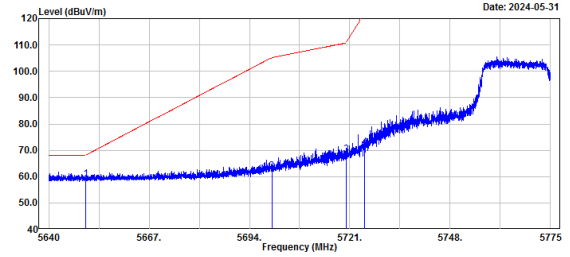

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5650.00	29.34	29.69	59.03	68.20	9.17	Peak
2	5700.00	32.37	29.77	62.14	105.20	43.06	Peak
3	5720.00	38.47	29.80	68.27	110.80	42.53	Peak
4	5725.00	41.19	29.81	71.00	122.20	51.20	Peak

802.11n ht40 mode, High Channel, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-3_high channel 5795MHz

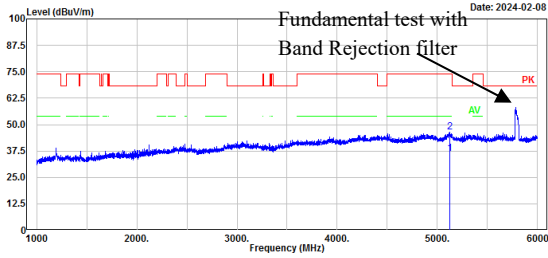

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5126.825	37.57	-1.30	36.27	54.00	17.73	Average
2	5126.825	47.55	-1.30	46.25	74.00	27.75	Peak


802.11n ht40 mode, High Channel, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-3_high channel 5795MHz

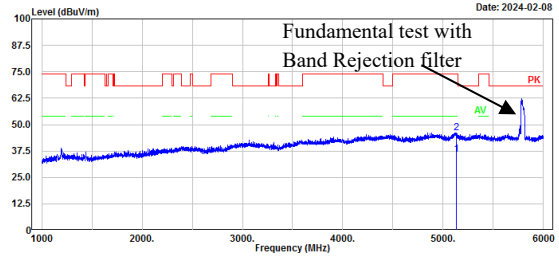


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5130.826	37.24	-1.27	35.97	54.00	18.03	Average
2	5130.826	47.46	-1.27	46.19	74.00	27.81	Peak

Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-3_high channel 5795MHz

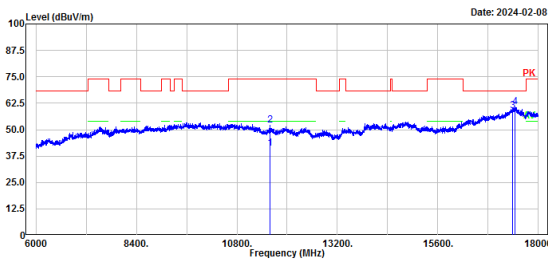

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11590.000	36.45	4.51	40.96	54.00	13.04	Average
2	11590.000	47.63	4.51	52.14	74.00	21.86	Peak
3	17385.000	44.03	14.96	58.99	68.20	9.21	Peak
4	17435.890	45.58	15.36	60.94	68.20	7.26	Peak


Project No.: XMDN231122-69423E-RF Serial No.: 2EB1-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-3_high channel 5795MHz

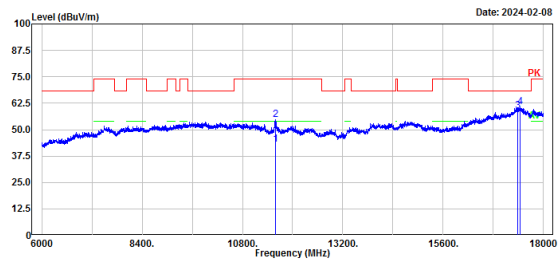

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11590.000	38.34	4.51	42.85	54.00	11.15	Average
2	11590.000	50.30	4.51	54.81	74.00	19.19	Peak
3	17385.000	44.05	14.96	59.01	68.20	9.19	Peak
4	17443.090	45.31	15.42	60.73	68.20	7.47	Peak

802.11n ht40 mode, High Channel, Bandedge, Horizontal


Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Horizontal Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-3_high channel 5795MHz

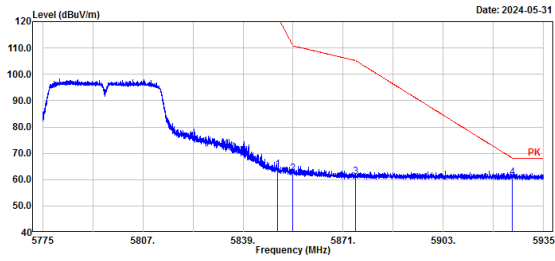

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.00	33.75	30.00	63.75	122.20	58.45	Peak
2	5855.00	32.48	30.01	62.49	110.80	48.31	Peak
3	5875.00	31.16	30.04	61.20	105.20	44.00	Peak
4	5925.00	30.82	30.12	60.94	68.20	7.26	Peak

802.11n ht40 mode, High Channel, Bandedge, Vertical

Project No.: XMDN231122-69423E-RF Serial No.: 2E81-3
 Polarization: Vertical Tester: Colin Yang
 Test Mode: Transmitting
 Note: 802.11n40_U-NII-3_high channel 5795MHz

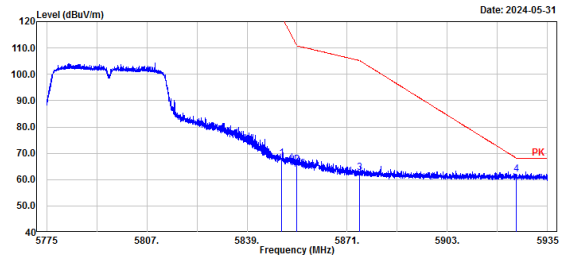


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.00	38.09	30.00	68.09	122.20	54.11	Peak
2	5855.00	35.66	30.01	65.67	110.80	45.13	Peak
3	5875.00	32.56	30.04	62.60	105.20	42.60	Peak
4	5925.00	31.89	30.12	62.01	68.20	6.19	Peak

802.11ac80 mode, Middle Channel, Horizontal

Project No.: XMDN231122-69423E-RF
 Polarization: Horizontal
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-3_middle channel 5775MHz

Serial No.: 2E81-3
 Tester: Colin Yang

Date: 2024-05-31

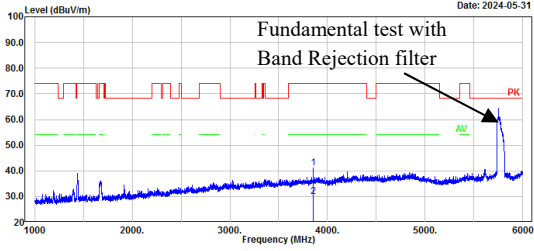


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3853.00	52.16	-11.17	40.99	74.00	33.01	Peak
2	3853.00	41.28	-11.17	30.11	54.00	23.89	Average

802.11ac80 mode, Middle Channel, Vertical

Project No.: XMDN231122-69423E-RF
 Polarization: Vertical
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-3_middle channel 5775MHz

Serial No.: 2E81-3
 Tester: Colin Yang

Date: 2024-05-31

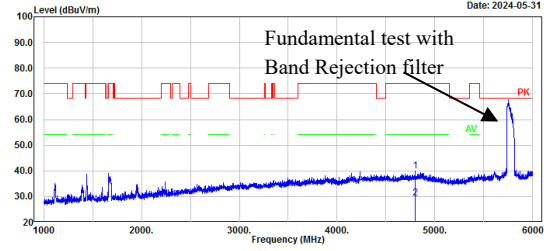


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4797.00	50.05	-10.11	39.94	74.00	34.06	Peak
2	4797.00	39.54	-10.11	29.43	54.00	24.57	Average

Project No.: XMDN231122-69423E-RF
 Polarization: Horizontal
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-3_middle channel 5775MHz

Serial No.: 2E81-3
 Tester: Colin Yang

Date: 2024-05-31

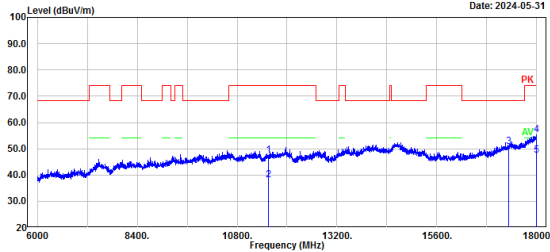


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11550.00	46.00	1.58	47.58	74.00	26.42	Peak
2	11550.00	36.42	1.58	38.00	54.00	16.00	Average
3	17325.00	46.44	4.33	50.77	68.20	17.43	Peak
4	17992.80	47.21	8.09	55.30	74.00	18.70	Peak
5	17992.80	39.46	8.09	47.55	54.00	6.45	Average

Project No.: XMDN231122-69423E-RF
 Polarization: Vertical
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-3_middle channel 5775MHz

Serial No.: 2E81-3
 Tester: Colin Yang


Date: 2024-05-31

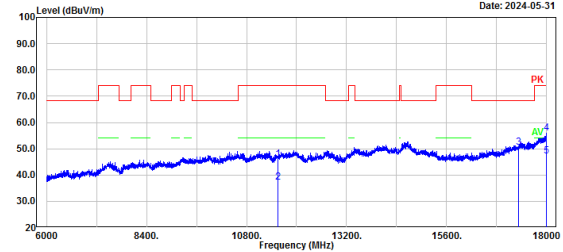

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11550.00	44.53	1.58	46.11	74.00	27.89	Peak
2	11550.00	35.75	1.58	37.33	54.00	16.67	Average
3	17325.00	46.20	4.33	50.53	68.20	17.67	Peak
4	17997.60	47.82	8.12	55.94	74.00	18.06	Peak
5	17997.60	39.00	8.12	47.12	54.00	6.88	Average

802.11ac80 mode, Middle Channel, Bandedge, Horizontal


Project No.: XMDN231122-69423E-RF
 Polarization: Horizontal
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-3_middle channel 5775MHz
 Serial No.: 2E61-3
 Tester: Colin Yang

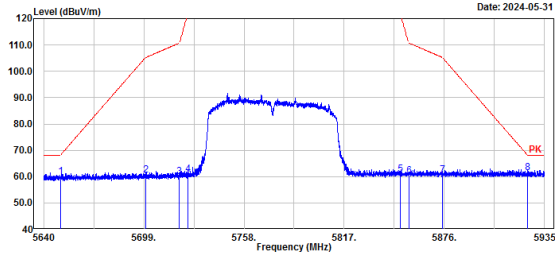

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5650.00	30.15	29.69	59.84	68.20	8.36	Peak
2	5700.00	30.69	29.77	60.46	105.20	44.74	Peak
3	5720.00	30.24	29.80	60.04	110.80	50.76	Peak
4	5725.00	31.05	29.81	60.86	122.20	61.34	Peak
5	5850.00	30.81	30.00	60.81	122.20	61.39	Peak
6	5855.00	30.36	30.01	60.37	110.80	50.43	Peak
7	5875.00	30.55	30.04	60.59	105.20	44.61	Peak
8	5925.00	31.22	30.12	61.34	68.20	6.86	Peak

802.11ac80 mode, Middle Channel, Bandedge, Vertical


Project No.: XMDN231122-69423E-RF
 Polarization: Vertical
 Test Mode: Transmitting
 Note: 802.11ac80_U-NII-3_middle channel 5775MHz
 Serial No.: 2E61-3
 Tester: Colin Yang

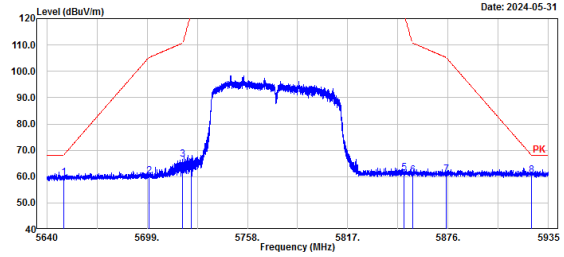

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5650.00	29.97	29.69	59.66	68.20	8.54	Peak
2	5700.00	30.35	29.77	60.12	105.20	45.08	Peak
3	5720.00	36.76	29.80	66.56	110.80	44.24	Peak
4	5725.00	33.93	29.81	63.74	122.20	58.46	Peak
5	5850.00	31.44	30.00	61.44	122.20	60.76	Peak
6	5855.00	30.54	30.01	60.55	110.80	50.25	Peak
7	5875.00	30.66	30.04	60.70	105.20	44.50	Peak
8	5925.00	30.55	30.12	60.67	68.20	7.53	Peak

18-40GHz:

No Emission was detected in the range 18-40GHz, test was performed on the mode and channel which with the maximum power.

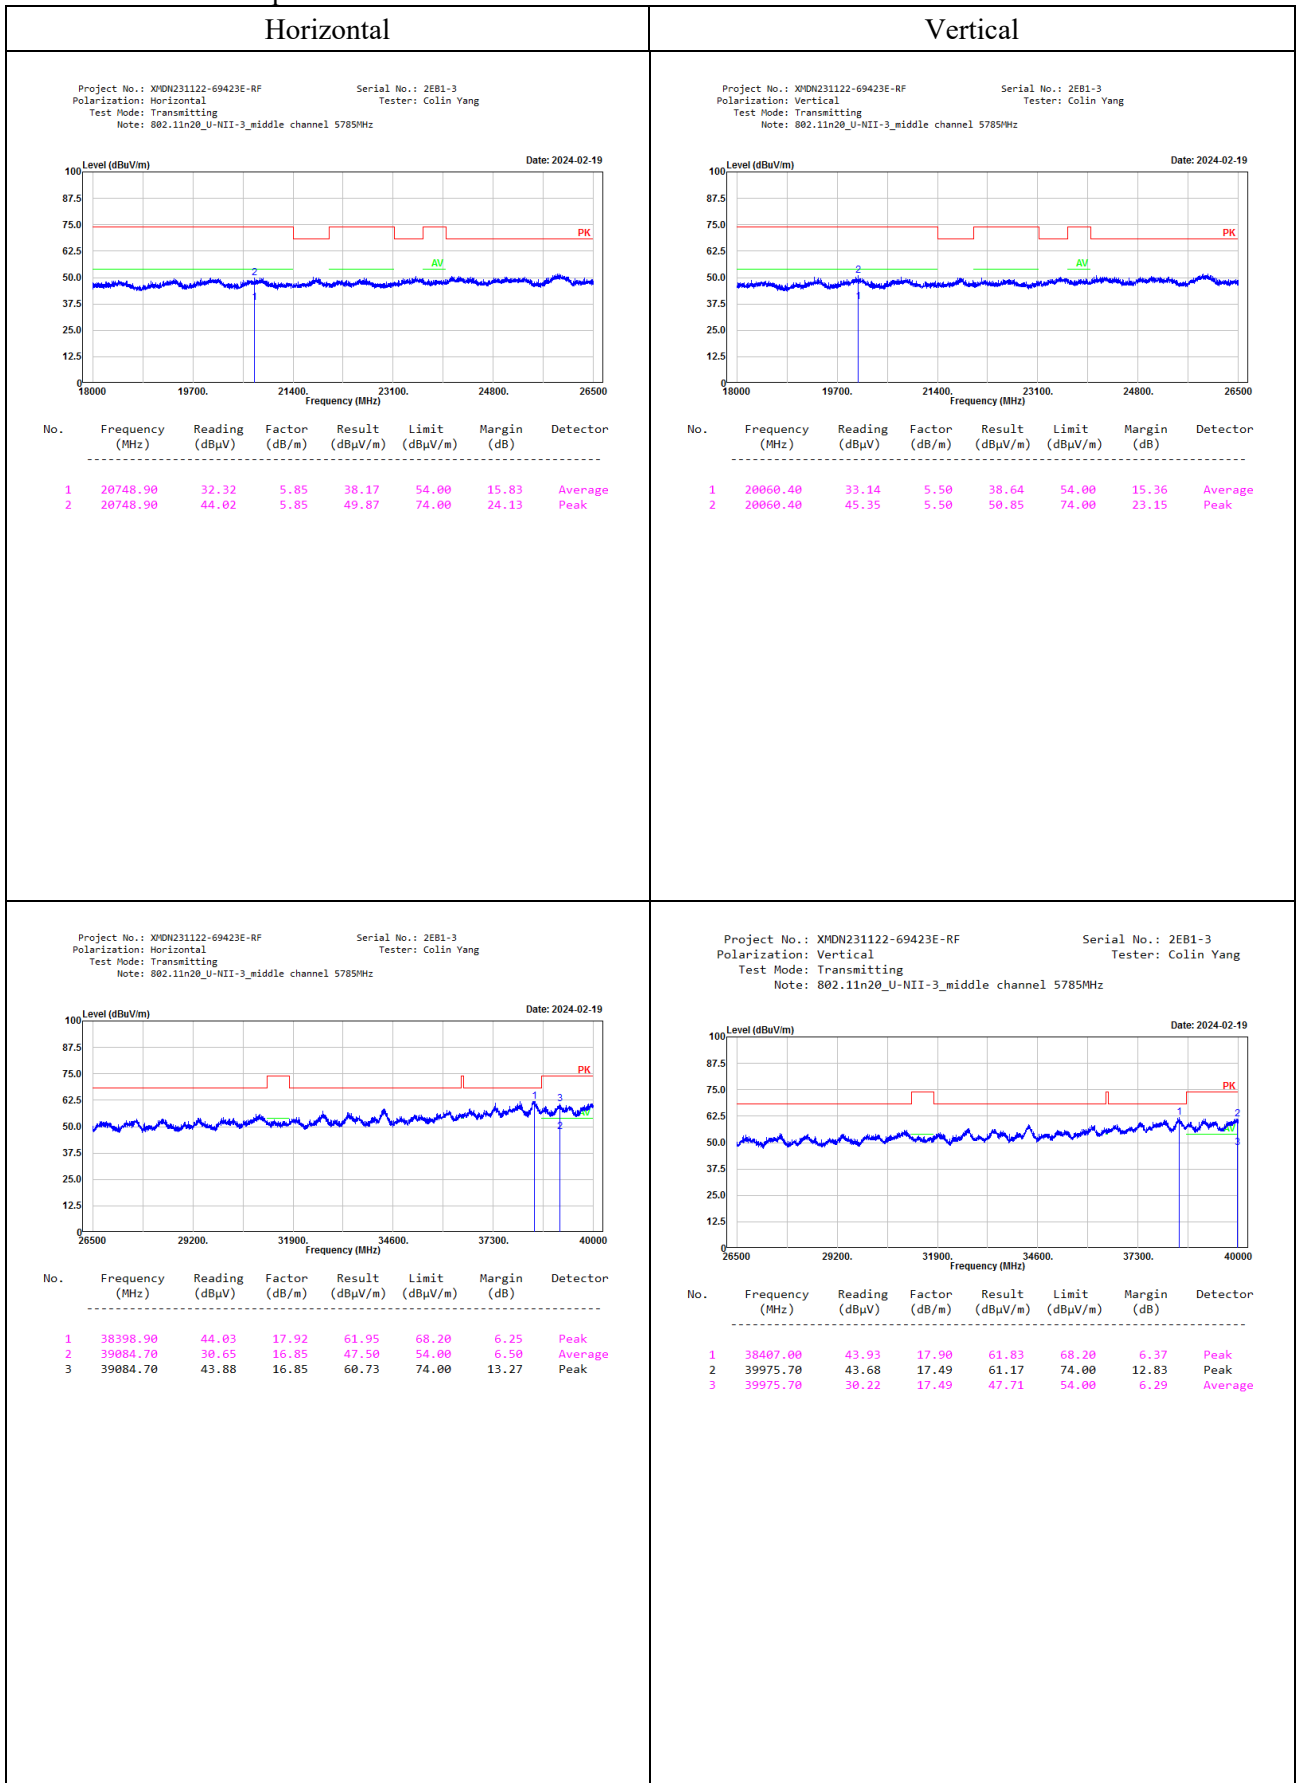

5.3 Emission Bandwidth

Serial No.:	2EB1-1	Test Date:	2024/02/24~2024/04/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	Jojo Zhou	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.7~25.6	Relative Humidity: (%)	45~56	ATM Pressure: (kPa)	100.6~101.2
-----------------------------	-----------	----------------------------------	-------	-------------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101947	2023/10/18	2024/10/17
E-Microwave	Coaxial Attenuators	EMCA10-5RN-6	OE01203239	2023/09/01	2024/08/31

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

5150-5250 MHz

26 dB Emission Bandwidth:

Mode	Value(MHz)
a_5180MHz_Chain 0	42.500
a_5200MHz_Chain 0	44.000
a_5240MHz_Chain 0	26.039
n20_5180MHz_Chain 0	48.300
n20_5200MHz_Chain 0	49.900
n20_5240MHz_Chain 0	25.994
n40_5190MHz_Chain 0	95.000
n40_5230MHz_Chain 0	43.700
ac80_5210MHz_Chain 0	98.400

5250-5350 MHz

Mode	Value(MHz)
a_5260MHz_Chain 0	46.200
a_5280MHz_Chain 0	46.800
a_5320MHz_Chain 0	45.700
n20_5260MHz_Chain 0	48.300
n20_5280MHz_Chain 0	48.600
n20_5320MHz_Chain 0	46.700
n40_5270MHz_Chain 0	90.200
n40_5310MHz_Chain 0	87.200
ac80_5290MHz_Chain 0	196.560

5470-5725 MHz


Mode	Value(MHz)
a_5500MHz_Chain 0	23.800
a_5580MHz_Chain 0	24.250
a_5700MHz_Chain 0	23.050
a_5720MHz_Chain 0	29.580
n20_5500MHz_Chain 0	23.640
n20_5580MHz_Chain 0	24.900
n20_5700MHz_Chain 0	23.950
n20_5720MHz_Chain 0	25.740
n40_5510MHz_Chain 0	49.200
n40_5550MHz_Chain 0	49.400
n40_5670MHz_Chain 0	46.200
n40_5710MHz_Chain 0	44.400
ac80_5530MHz_Chain 0	178.000
ac80_5610MHz_Chain 0	179.600
ac80_5690MHz_Chain 0	192.400

5725-5850 MHz**Minimum 6dB Emission Bandwidth:**

Mode	Value (MHz)	Limit (MHz)	Result
a_5745MHz_Chain 0	16.550	0.500	Pass
a_5785MHz_Chain 0	16.500	0.500	Pass
a_5825MHz_Chain 0	16.500	0.500	Pass
n20_5745MHz_Chain 0	16.550	0.500	Pass
n20_5785MHz_Chain 0	16.500	0.500	Pass
n20_5825MHz_Chain 0	16.500	0.500	Pass
n40_5755MHz_Chain 0	36.300	0.500	Pass
n40_5795MHz_Chain 0	36.300	0.500	Pass
ac80_5775MHz_Chain 0	75.600	0.500	Pass


5150-5250MHz:
26dB Emission Bandwidth:

a_ 5180 MHz_Chain 0

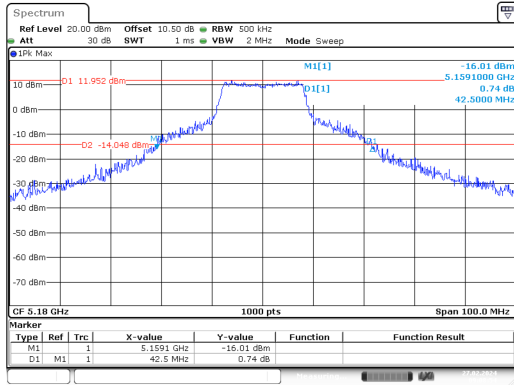


ProjectNo.:XMDN231122-69423E-RF Tester:Jojo Zhou
Date: 27.FEB.2024 09:08:55

a_ 5200MHz_Chain 0

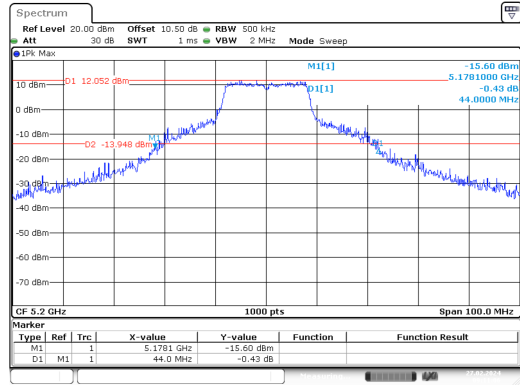


ProjectNo.:XMDN231122-69423E-RF Tester:Jojo Zhou
Date: 27.FEB.2024 09:11:07

a_ 5240MHz_Chain 0

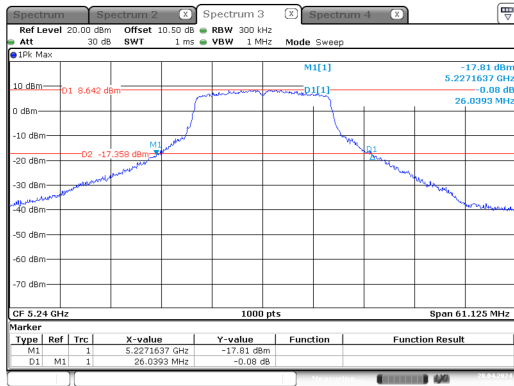


ProjectNo.:XMDN231122-69423E-RF Tester:Jojo Zhou
Date: 28.APR.2024 17:52:15

n20_ 5180MHz_Chain 0

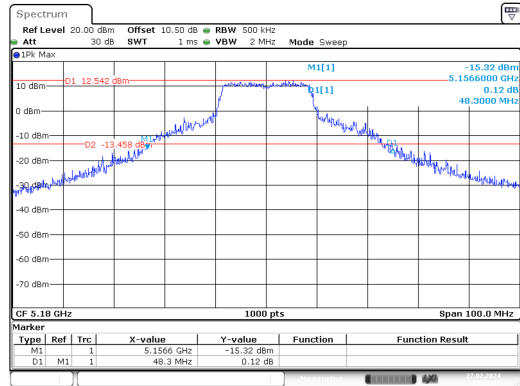


ProjectNo.:XMDN231122-69423E-RF Tester:Jojo Zhou
Date: 27.FEB.2024 09:15:09

n20_ 5200MHz_Chain 0

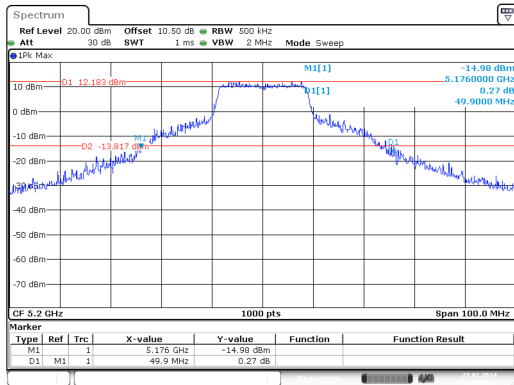


ProjectNo.:XMDN231122-69423E-RF Tester:Jojo Zhou
Date: 27.FEB.2024 09:19:48

n20_ 5240MHz_Chain 0

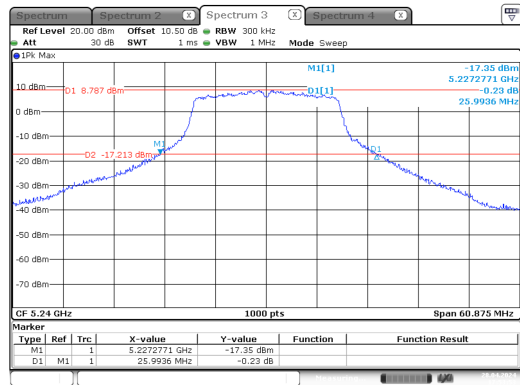


ProjectNo.:XMDN231122-69423E-RF Tester:Jojo Zhou
Date: 28.APR.2024 17:53:53

n40_5190MHz_Chain 0

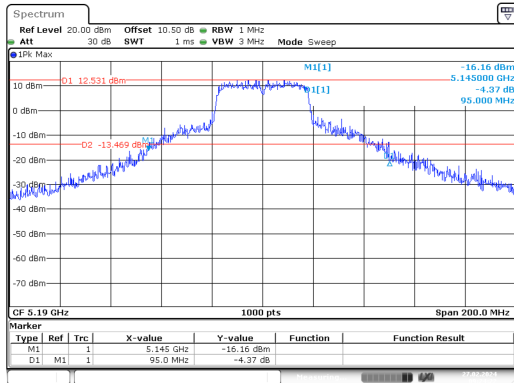


ProjectNo.:XMDN231122-69423E-RF Tester:Jojo Zhou
Date: 27.FEB.2024 09:24:22

n40_5230MHz_Chain 0

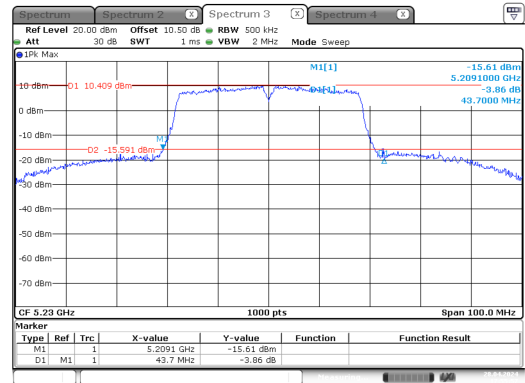

ProjectNo.:XMDN231122-69423E-RF Tester:Jojo Zhou
Date: 28.APR.2024 17:55:18

ac80_5210MHz_Chain 0

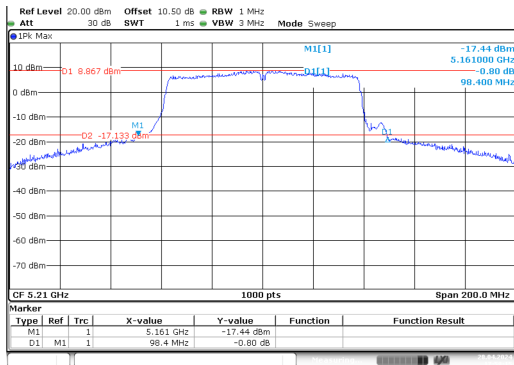

ProjectNo.:XMDN231122-69423E-RF Tester:Jojo Zhou
Date: 28.APR.2024 17:58:15