



TESTING LABORATORY  
CERTIFICATE #4820.01



# FCC PART 15.247

## TEST REPORT

For

### AKUVOX (XIAMEN) NETWORKS CO., LTD.

10/F, No.56, Software Park II, Xiamen, China

**FCC ID: 2AHCR-VPR48G433**

<b>Report Type:</b> Original Report	<b>Product Name:</b> Video Phone
<b>Report Number:</b> RXM180614051-00B	
<b>Report Date:</b> 2018-08-27	
<b>Reviewed By:</b> Dean Lau RF Supervisor	<i>Dean Lau</i>
<b>Test Laboratory:</b> Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government. \* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*\*”.

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY .....	5
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EUT EXERCISE SOFTWARE .....	6
EQUIPMENT MODIFICATIONS .....	6
SUPPORT EQUIPMENT LIST AND DETAILS .....	6
SUPPORT CABLE LIST AND DETAILS .....	6
BLOCK DIAGRAM OF TEST SETUP .....	7
<b>SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
<b>FCC §15.247 (i) &amp; §1.1310 &amp; §2.1091- MAXIMUM PERMISSIBLE EXPOSURE(MPE).....</b>	<b>9</b>
APPLICABLE STANDARD .....	9
<b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>	<b>10</b>
APPLICABLE STANDARD .....	10
ANTENNA CONNECTOR CONSTRUCTION .....	10
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
EUT SETUP .....	11
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE .....	11
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST DATA .....	12
<b>FCC §15.209, §15.205 &amp; §15.247(d) - SPURIOUS EMISSIONS.....</b>	<b>17</b>
APPLICABLE STANDARD .....	17
EUT SETUP.....	17
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	18
TEST PROCEDURE .....	18
TEST EQUIPMENT LIST AND DETAILS.....	18
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	19
TEST DATA .....	19
<b>FCC §15.247(a) (1) - CHANNEL SEPARATION TEST .....</b>	<b>29</b>
APPLICABLE STANDARD .....	29
TEST EQUIPMENT LIST AND DETAILS.....	29
TEST PROCEDURE .....	29
TEST DATA .....	29
<b>FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING.....</b>	<b>35</b>
APPLICABLE STANDARD .....	35
TEST PROCEDURE .....	35
TEST EQUIPMENT LIST AND DETAILS.....	35

TEST DATA .....35

**FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST .....41**

    APPLICABLE STANDARD .....41

    TEST PROCEDURE .....41

    TEST EQUIPMENT LIST AND DETAILS.....41

    TEST DATA .....41

**FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....45**

    APPLICABLE STANDARD .....45

    TEST PROCEDURE .....45

    TEST EQUIPMENT LIST AND DETAILS.....45

    TEST DATA .....45

**FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT .....61**

    APPLICABLE STANDARD .....61

    TEST PROCEDURE .....61

    TEST EQUIPMENT LIST AND DETAILS.....61

    TEST DATA .....61

**FCC §15.247(d) - BAND EDGES TESTING .....63**

    APPLICABLE STANDARD .....63

    TEST PROCEDURE .....63

    TEST EQUIPMENT LIST AND DETAILS.....63

    TEST DATA .....64

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

<b>EUT Name:</b>		Video Phone
<b>EUT Model:</b>		VP-R48G(433)
<b>Multiple Model:</b>		R48G(433)
<b>FCC ID:</b>		2AHCR-VPR48G433
<b>Rated Input Voltage:</b>		DC12V from adapter or DC48V from POE
<b>Adapter Information</b>	<b>Model:</b>	RD1201000-C55-26MG
	<b>Input:</b>	AC 100-240V, 50/60Hz, 0.6A MAX
	<b>Output:</b>	DC 12V, 1A
<b>External Dimension:</b>		241mm(L)*198mm(W)*95mm(H)
<b>Serial Number:</b>		180614051
<b>EUT Received Date:</b>		2018.06.15

*Note: The series product, models VP-R48G(433), R48G(433) are electrically identical, we selected VP-R48G(433) for testing, the details of the differences between them were explained in the declaration letter.*

### Objective

This report is prepared on behalf of *AKUVOX (XIAMEN) NETWORKS CO., LTD.* in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the Bluetooth BDR and EDR mode of EUT compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

FCC Part 15C DSR submissions with FCC ID: 2AHCR-VPR48G433.  
 FCC Part 15C DTS submissions with FCC ID: 2AHCR-VPR48G433.  
 Submitted with the part of a system with FCC ID: 2AHCR-EP10-433.

### Test Methodology

All measurements detailed in this test report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices".

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

### Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB,200M~1GHz: 5.92 dB,1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

### Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218,the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in engineering mode.

### EUT Exercise Software

The Engineering Mode configured the maximum power level as default setting.

### Equipment Modifications

No modification was made to the EUT.

### Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
L.T.E.	SWITCHING MODE POWER SUPPLY	G0548B-480-050	N/A
Tenda	Router	D301	E3941017710003629
Huawei	Headset	N/A	
DELL	Notebook	PP11L	HLKYGB1
Sandisk	U-DISK	N/A	N/A
Dell	Monitor	U3011t	CN-OPH5NY-74445-17M-114L

### Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Adapter Cable	No	No	1.52	Adapter	EUT
RJ45 Cable	No	No	5.00	PC Port of EUT	Notebook
RJ45 Cable	No	No	5.00	INTERNET Port of EUT	Router
RJ45 Cable	No	No	1.00	INTERNET Port of EUT	POE
HDMI Cable	Yes	Yes	3.05	HDMI Port of EUT	Monitor

### Block Diagram of Test Setup

M1

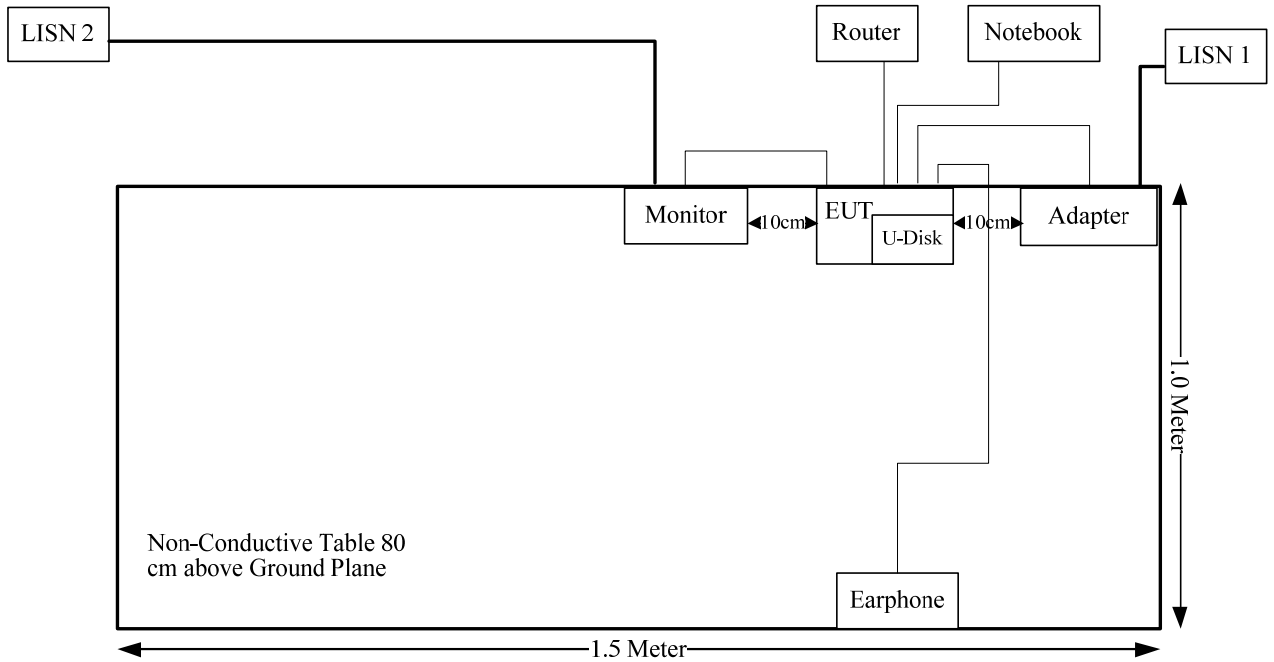

M2

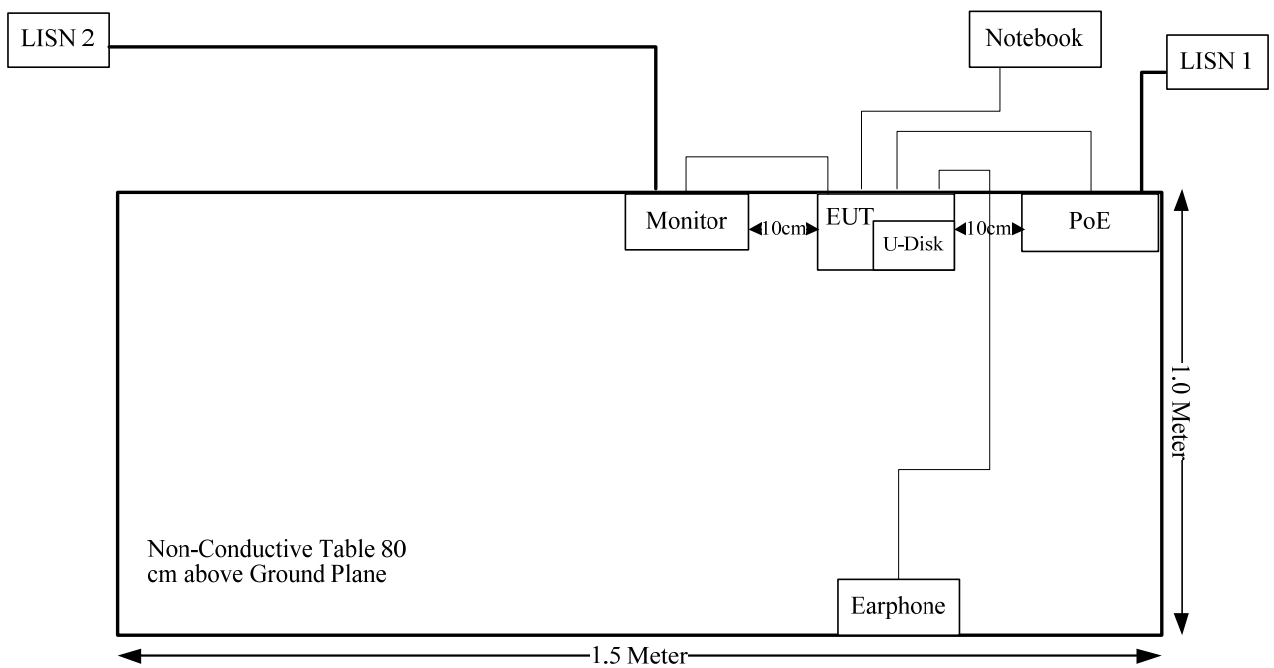

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance



**FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE(MPE)**

**Applicable Standard**

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; \* = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

**Calculated Formulary:**

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$  = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

**Calculated Data:**

Frequency (MHz)	Antenna Gain		Tune-up Power		Evaluation Distance (cm)	Power Density (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
	(dBi)	(numeric)	(dBm)	(mW)			
2402-2408	2	1.58	5.5	3.55	20.00	0.001	1.0

**Result:** The device meet FCC MPE at 20 cm distance

---

## **FCC §15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **Antenna Connector Construction**

The EUT has one internal antenna arrangement for BT, and the antenna gain is 2 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


**Result:** Compliance.

**FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS**

**Applicable Standard**

FCC§15.207(a)

**EUT Setup**

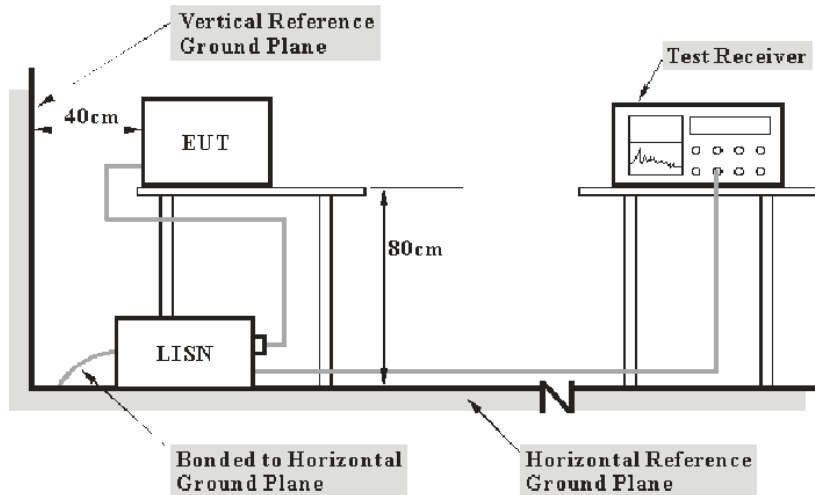

- Note: 1. Support units were connected to second LISN.
- 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

**EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

**Test Procedure**

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

## Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

$V_C$ : corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_C$ : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2017-09-05	2018-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2017-12-08	2018-12-08

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Test Data

### Environmental Conditions


<b>Temperature:</b>	29.2 °C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101.3 kPa

*The testing was performed by Sider Huang on 2018-07-03.*

**Test Mode:** Transmitting (BDR mode middle channel was the worst)

Adapter


**AC120V, 60 Hz, Line:**

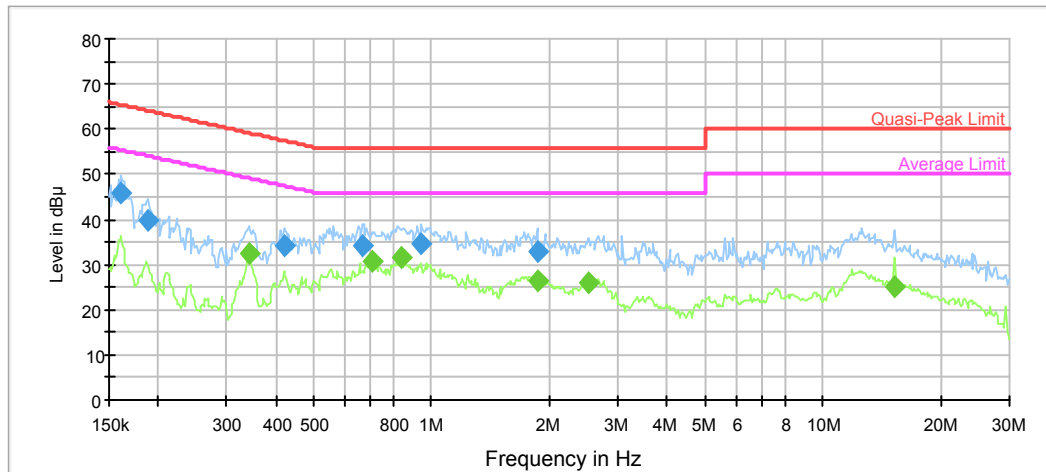

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.161152	45.9	9.000	L1	11.0	19.5	65.4	Compliance
0.188994	39.9	9.000	L1	10.7	24.2	64.1	Compliance
0.419276	34.2	9.000	L1	10.0	23.3	57.5	Compliance
0.665597	34.4	9.000	L1	9.8	21.6	56.0	Compliance
0.945093	34.8	9.000	L1	9.8	21.2	56.0	Compliance
1.860457	33.0	9.000	L1	9.7	23.0	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.340821	32.5	9.000	L1	10.1	16.7	49.2	Compliance
0.709407	30.7	9.000	L1	9.8	15.3	46.0	Compliance
0.838622	31.5	9.000	L1	9.8	14.5	46.0	Compliance
1.860457	26.4	9.000	L1	9.7	19.6	46.0	Compliance
2.518372	25.9	9.000	L1	9.8	20.1	46.0	Compliance
15.247554	25.2	9.000	L1	10.0	24.8	50.0	Compliance

**AC120V, 60 Hz, Neutral:**

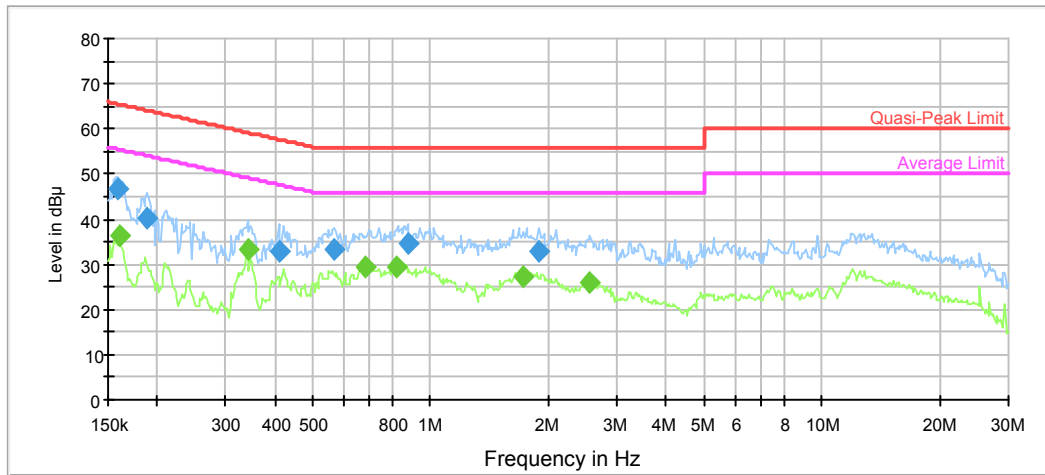


Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.158604	46.8	9.000	N	11.1	18.7	65.5	Compliance
0.188994	40.3	9.000	N	10.7	23.8	64.1	Compliance
0.409372	33.0	9.000	N	10.0	24.7	57.7	Compliance
0.567545	33.1	9.000	N	9.8	22.9	56.0	Compliance
0.872708	34.5	9.000	N	9.8	21.5	56.0	Compliance
1.890344	32.7	9.000	N	9.7	23.3	56.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.159873	36.2	9.000	N	11.0	19.3	55.5	Compliance
0.340821	33.4	9.000	N	10.1	15.8	49.2	Compliance
0.681699	29.6	9.000	N	9.8	16.4	46.0	Compliance
0.818813	29.3	9.000	N	9.8	16.7	46.0	Compliance
1.731709	27.1	9.000	N	9.7	18.9	46.0	Compliance
2.558827	25.8	9.000	N	9.8	20.2	46.0	Compliance

PoE


AC120V, 60 Hz, Line:

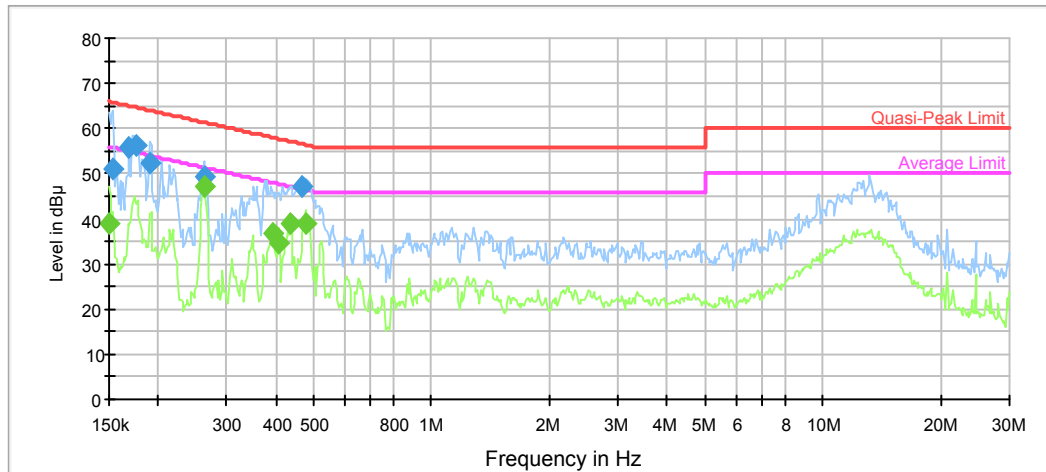

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.153629	50.9	9.000	L1	11.1	14.9	65.8	Compliance
0.169044	55.8	9.000	L1	10.9	9.2	65.0	Compliance
0.175915	56.4	9.000	L1	10.9	8.3	64.7	Compliance
0.190505	52.4	9.000	L1	10.7	11.6	64.0	Compliance
0.262017	49.2	9.000	L1	10.3	12.2	61.4	Compliance
0.468757	47.2	9.000	L1	9.9	9.3	56.5	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.150000	39.1	9.000	L1	11.2	16.9	56.0	Compliance
0.262017	47.2	9.000	L1	10.3	4.2	51.4	Compliance
0.393383	36.8	9.000	L1	10.0	11.2	48.0	Compliance
0.406123	34.6	9.000	L1	10.0	13.1	47.7	Compliance
0.436318	38.9	9.000	L1	9.9	8.2	47.1	Compliance
0.476287	38.8	9.000	L1	9.9	7.6	46.4	Compliance

**AC120V, 60 Hz, Neutral:**

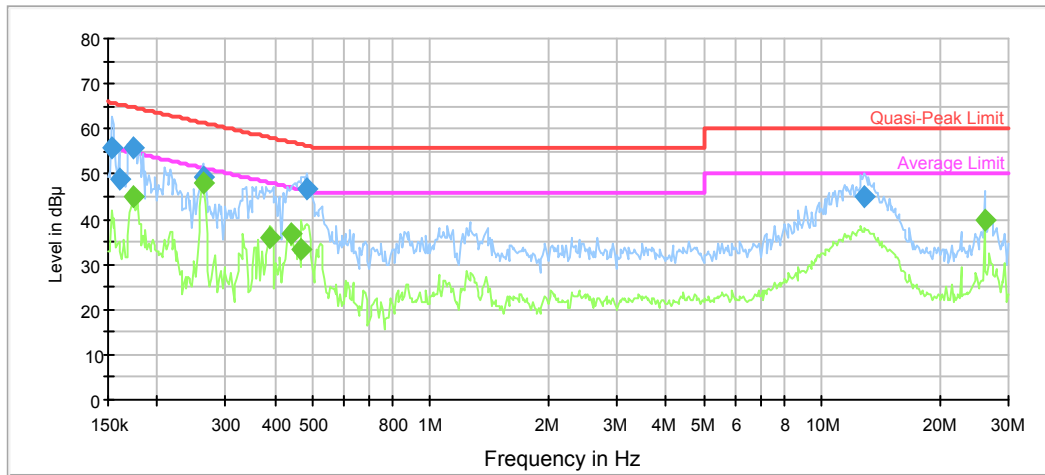

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.153629	56.0	9.000	N	11.1	9.8	65.8	Compliance
0.159873	48.8	9.000	N	11.0	16.7	65.5	Compliance
0.173134	55.7	9.000	N	10.9	9.1	64.8	Compliance
0.262017	49.2	9.000	N	10.3	12.2	61.4	Compliance
0.483938	46.8	9.000	N	9.9	9.5	56.3	Compliance
12.898197	44.9	9.000	N	9.9	15.1	60.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.174519	44.9	9.000	N	10.9	9.8	54.7	Compliance
0.262017	47.8	9.000	N	10.3	3.6	51.4	Compliance
0.390261	35.9	9.000	N	10.0	12.2	48.1	Compliance
0.443327	36.6	9.000	N	9.9	10.4	47.0	Compliance
0.468757	33.1	9.000	N	9.9	13.4	46.5	Compliance
26.004938	39.6	9.000	N	10.1	10.4	50.0	Compliance




## FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

### Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

### EUT Setup

#### Below 1GHz:

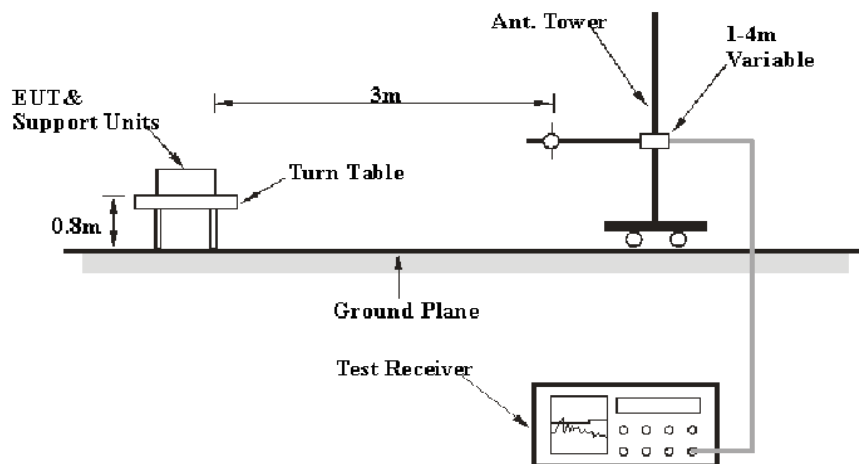

#### Above 1GHz:

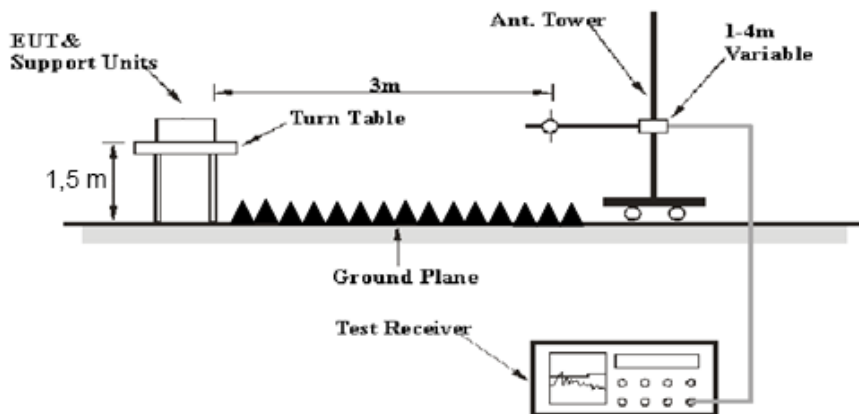

The radiated emission Below 1GHz tests were performed in the 3 meters chamber test site A, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-12-11	2018-12-11
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2017-09-05	2018-09-05
HP	Amplifier	8447D	2727A05902	2017-09-05	2018-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2018-01-04	2019-01-04
ETS-Lindgren	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-04
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2018-06-27	2019-06-27
MITEQ	Amplifier	AFS42-00101800- 25-S-42	2001271	2017-9-5	2018-9-5
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2018-06-27	2019-06-27
E-Microwave	Band-stop Filters	OBSF-2400-2483.5- S	OE01601525	2018-06-16	2019-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2018-06-16	2019-06-16

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Data

### Environmental Conditions

<b>Temperature:</b>	25.6 ~26.8 °C
<b>Relative Humidity:</b>	37 ~42 %
<b>ATM Pressure:</b>	100.6 ~101.6 kPa


\* The testing was performed by Tyler Pan & Sunny Cen from 2018-06-29 to 2018-07-05 .

*Test Mode: Transmitting*

1) 30MHz-1GHz( $\pi/4$ -DQPSK Low channel was the worst)


Adapter

Horizontal:

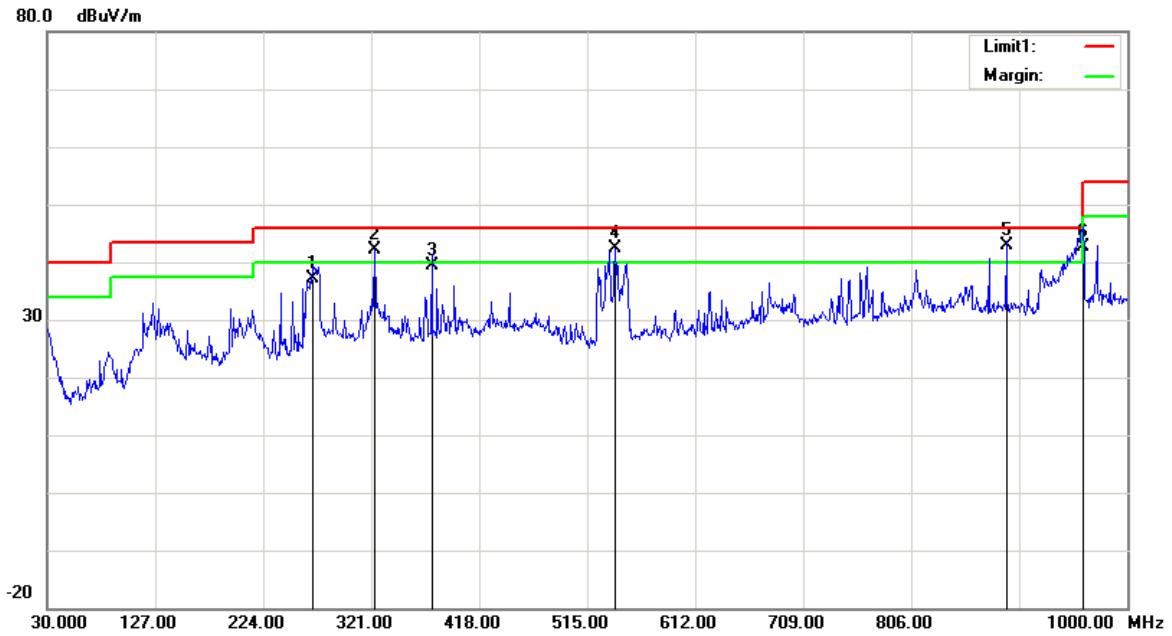

Frequency (MHz)	Receiver Reading (dB $\mu$ V)	Detector	Correction Factor (dB/m)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
268.6200	41.58	QP	-4.38	37.20	46.00	8.80
323.9100	45.61	QP	-3.51	42.10	46.00	3.90
375.3200	42.06	QP	-2.66	39.40	46.00	6.60
540.2200	42.15	QP	0.26	42.41	46.00	3.59
891.3600	36.90	QP	5.90	42.80	46.00	3.20
960.2300	13.47	QP	29.13	42.60	54.00	11.40


**Vertical:**

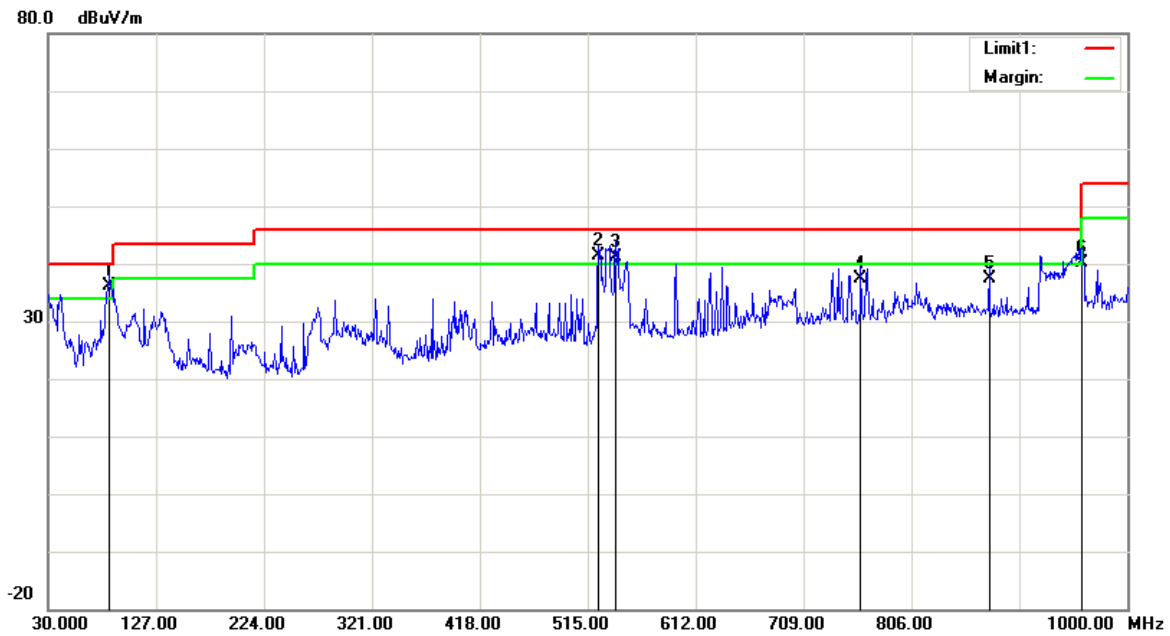

Frequency (MHz)	Receiver Reading (dBµV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
84.3200	47.56	QP	-11.46	36.10	40.00	3.90
524.7000	41.16	QP	0.14	41.30	46.00	4.70
540.2200	40.94	QP	0.26	41.20	46.00	4.80
760.4100	33.44	QP	4.06	37.50	46.00	8.50
875.8400	31.87	QP	5.53	37.40	46.00	8.60
959.2600	11.08	QP	29.12	40.20	46.00	5.80


PoE

**Horizontal:**

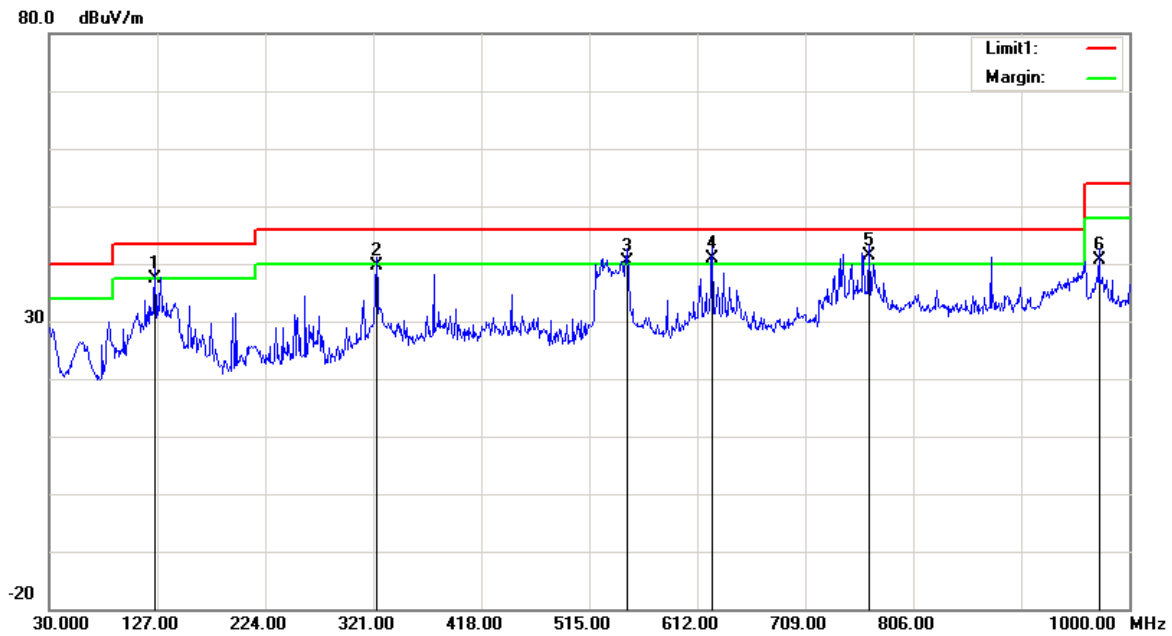

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
125.0600	42.26	QP	-4.76	37.50	43.50	6.00
323.9100	43.11	QP	-3.51	39.60	46.00	6.40
548.9500	40.29	QP	0.21	40.50	46.00	5.50
625.5800	39.10	QP	1.70	40.80	46.00	5.20
766.2300	37.10	QP	4.20	41.30	46.00	4.70
972.8400	11.35	QP	29.25	40.60	54.00	13.40

**Vertical:**

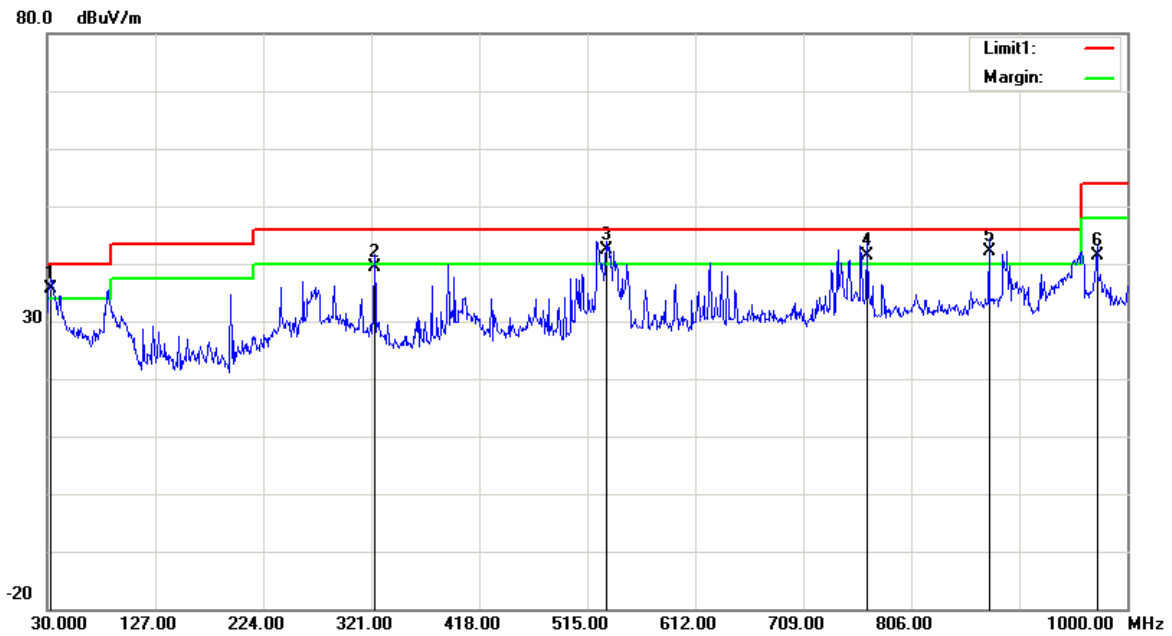

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
32.9100	36.25	QP	-0.65	35.60	40.00	4.40
323.9100	43.01	QP	-3.51	39.50	46.00	6.50
532.4600	42.18	QP	0.32	42.50	46.00	3.50
766.2300	37.30	QP	4.20	41.50	46.00	4.50
875.8400	36.57	QP	5.53	42.10	46.00	3.90
972.8400	12.25	QP	29.25	41.50	54.00	12.50

**2) 1GHz-25GHz:**

*BDR Mode (GFSK):*

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	72.97	PK	H	28.10	1.80	0.00	102.87	N/A	N/A
2402.00	62.55	AV	H	28.10	1.80	0.00	92.45	N/A	N/A
2402.00	73.94	PK	V	28.10	1.80	0.00	103.84	N/A	N/A
2402.00	63.47	AV	V	28.10	1.80	0.00	93.37	N/A	N/A
2390.00	24.28	PK	V	28.08	1.80	0.00	54.16	74.00	19.84
2390.00	13.48	AV	V	28.08	1.80	0.00	43.36	54.00	10.64
4804.00	47.85	PK	V	32.91	3.17	37.20	46.73	74.00	27.27
4804.00	35.66	AV	V	32.91	3.17	37.20	34.54	54.00	19.46
7206.00	46.28	PK	V	35.74	4.82	37.23	49.61	74.00	24.39
7206.00	34.09	AV	V	35.74	4.82	37.23	37.42	54.00	16.58
Middle Channel: 2441 MHz									
2441.00	73.54	PK	H	28.18	1.82	0.00	103.54	N/A	N/A
2441.00	62.89	AV	H	28.18	1.82	0.00	92.89	N/A	N/A
2441.00	75.34	PK	V	28.18	1.82	0.00	105.34	N/A	N/A
2441.00	64.82	AV	V	28.18	1.82	0.00	94.82	N/A	N/A
4882.00	47.26	PK	V	33.06	3.27	37.21	46.38	74.00	27.62
4882.00	34.95	AV	V	33.06	3.27	37.21	34.07	54.00	19.93
7323.00	46.85	PK	V	36.04	4.62	37.38	50.13	74.00	23.87
7323.00	34.41	AV	V	36.04	4.62	37.38	37.69	54.00	16.31
High Channel: 2480 MHz									
2480.00	71.78	PK	H	28.26	1.84	0.00	101.88	N/A	N/A
2480.00	61.29	AV	H	28.26	1.84	0.00	91.39	N/A	N/A
2480.00	73.23	PK	V	28.26	1.84	0.00	103.33	N/A	N/A
2480.00	62.56	AV	V	28.26	1.84	0.00	92.66	N/A	N/A
2483.50	32.81	PK	V	28.27	1.84	0.00	62.92	74.00	11.08
2483.50	14.18	AV	V	28.27	1.84	0.00	44.29	54.00	9.71
4960.00	47.01	PK	V	33.22	3.23	37.25	46.21	74.00	27.79
4960.00	34.67	AV	V	33.22	3.23	37.25	33.87	54.00	20.13
7440.00	45.88	PK	V	36.34	4.41	37.52	49.11	74.00	24.89
7440.00	33.39	AV	V	36.34	4.41	37.52	36.62	54.00	17.38



EDR Mode ( $\pi/4$ -DQPSK):




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	69.35	PK	H	28.10	1.80	0.00	99.25	N/A	N/A
2402.00	56.61	AV	H	28.10	1.80	0.00	86.51	N/A	N/A
2402.00	72.07	PK	V	28.10	1.80	0.00	101.97	N/A	N/A
2402.00	59.37	AV	V	28.10	1.80	0.00	89.27	N/A	N/A
2390.00	24.99	PK	V	28.08	1.80	0.00	54.87	74.00	19.13
2390.00	13.48	AV	V	28.08	1.80	0.00	43.36	54.00	10.64
4804.00	47.68	PK	V	32.91	3.17	37.20	46.56	74.00	27.44
4804.00	35.27	AV	V	32.91	3.17	37.20	34.15	54.00	19.85
7206.00	46.12	PK	V	35.74	4.82	37.23	49.45	74.00	24.55
7206.00	33.85	AV	V	35.74	4.82	37.23	37.18	54.00	16.82
Middle Channel: 2441 MHz									
2441.00	71.29	PK	H	28.18	1.82	0.00	101.29	N/A	N/A
2441.00	58.64	AV	H	28.18	1.82	0.00	88.64	N/A	N/A
2441.00	73.12	PK	V	28.18	1.82	0.00	103.12	N/A	N/A
2441.00	60.59	AV	V	28.18	1.82	0.00	90.59	N/A	N/A
4882.00	47.68	PK	V	33.06	3.27	37.21	46.80	74.00	27.20
4882.00	35.46	AV	V	33.06	3.27	37.21	34.58	54.00	19.42
7323.00	46.29	PK	V	36.04	4.62	37.38	49.57	74.00	24.43
7323.00	34.09	AV	V	36.04	4.62	37.38	37.37	54.00	16.63
High Channel: 2480 MHz									
2480.00	69.71	PK	H	28.26	1.84	0.00	99.81	N/A	N/A
2480.00	57.26	AV	H	28.26	1.84	0.00	87.36	N/A	N/A
2480.00	71.29	PK	V	28.26	1.84	0.00	101.39	N/A	N/A
2480.00	58.77	AV	V	28.26	1.84	0.00	88.87	N/A	N/A
2483.50	27.48	PK	V	28.27	1.84	0.00	57.59	74.00	16.41
2483.50	14.32	AV	V	28.27	1.84	0.00	44.43	54.00	9.57
4960.00	47.53	PK	V	33.22	3.23	37.25	46.73	74.00	27.27
4960.00	35.21	AV	V	33.22	3.23	37.25	34.41	54.00	19.59
7440.00	45.10	PK	V	36.34	4.41	37.52	48.33	74.00	25.67
7440.00	33.26	AV	V	36.34	4.41	37.52	36.49	54.00	17.51

*EDR Mode (8-DPSK):*

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	70.41	PK	H	28.10	1.80	0.00	100.31	N/A	N/A
2402.00	57.35	AV	H	28.10	1.80	0.00	87.25	N/A	N/A
2402.00	72.24	PK	V	28.10	1.80	0.00	102.14	N/A	N/A
2402.00	59.25	AV	V	28.10	1.80	0.00	89.15	N/A	N/A
2390.00	25.57	PK	V	28.08	1.80	0.00	55.45	74.00	18.55
2390.00	13.42	AV	V	28.08	1.80	0.00	43.30	54.00	10.70
4804.00	46.88	PK	V	32.91	3.17	37.20	45.76	74.00	28.24
4804.00	34.72	AV	V	32.91	3.17	37.20	33.60	54.00	20.40
7206.00	45.69	PK	V	35.74	4.82	37.23	49.02	74.00	24.98
7206.00	33.48	AV	V	35.74	4.82	37.23	36.81	54.00	17.19
Middle Channel: 2441 MHz									
2441.00	71.72	PK	H	28.18	1.82	0.00	101.72	N/A	N/A
2441.00	58.77	AV	H	28.18	1.82	0.00	88.77	N/A	N/A
2441.00	73.84	PK	V	28.18	1.82	0.00	103.84	N/A	N/A
2441.00	60.75	AV	V	28.18	1.82	0.00	90.75	N/A	N/A
4882.00	47.25	PK	V	33.06	3.27	37.21	46.37	74.00	27.63
4882.00	35.33	AV	V	33.06	3.27	37.21	34.45	54.00	19.55
7323.00	46.10	PK	V	36.04	4.62	37.38	49.38	74.00	24.62
7323.00	34.29	AV	V	36.04	4.62	37.38	37.57	54.00	16.43
High Channel: 2480 MHz									
2480.00	70.26	PK	H	28.26	1.84	0.00	100.36	N/A	N/A
2480.00	57.21	AV	H	28.26	1.84	0.00	87.31	N/A	N/A
2480.00	71.37	PK	V	28.26	1.84	0.00	101.47	N/A	N/A
2480.00	58.42	AV	V	28.26	1.84	0.00	88.52	N/A	N/A
2483.50	26.88	PK	V	28.27	1.84	0.00	56.99	74.00	17.01
2483.50	14.53	AV	V	28.27	1.84	0.00	44.64	54.00	9.36
4960.00	47.29	PK	V	33.22	3.23	37.25	46.49	74.00	27.51
4960.00	35.10	AV	V	33.22	3.23	37.25	34.30	54.00	19.70
7440.00	46.55	PK	V	36.34	4.41	37.52	49.78	74.00	24.22
7440.00	34.31	AV	V	36.34	4.41	37.52	37.54	54.00	16.46




**Worst plots(8-DPSK Low channel)**  
**Horizontal**

Fundamental  
Test with Band  
Rejection Filter

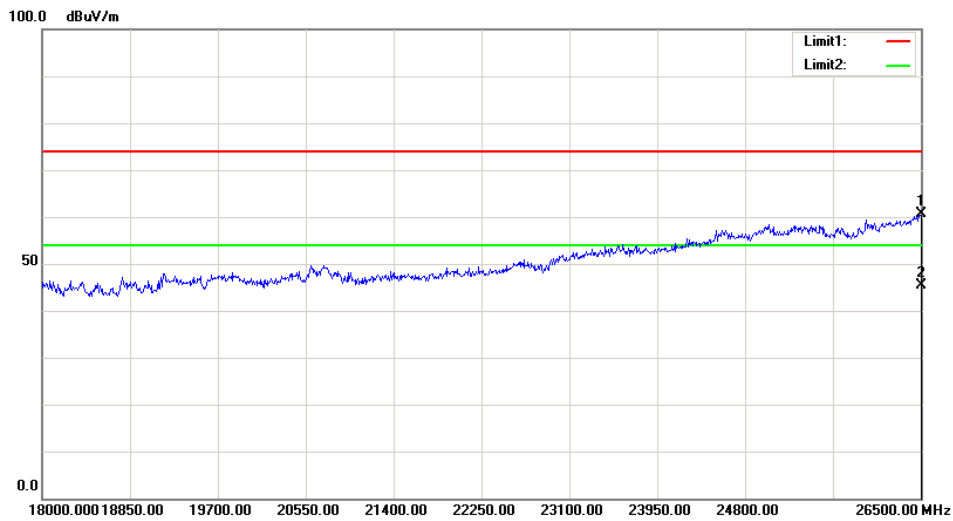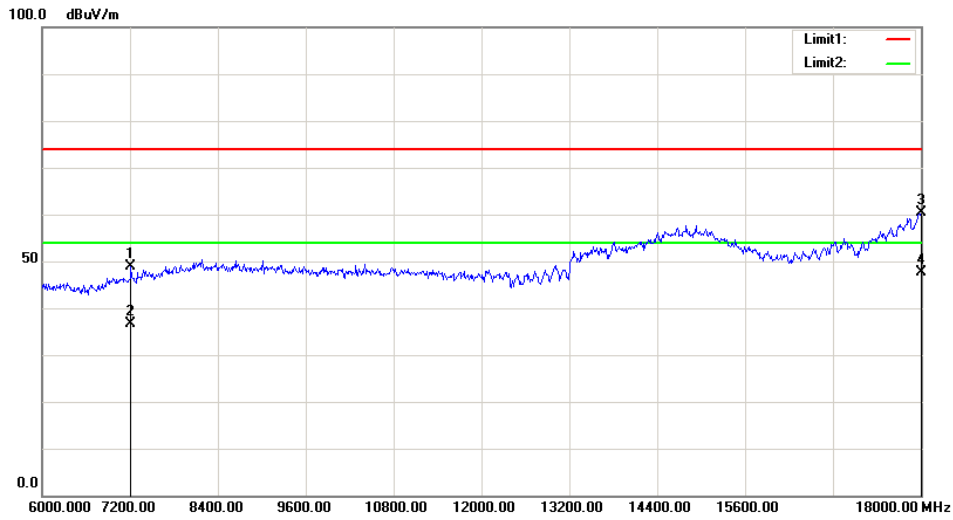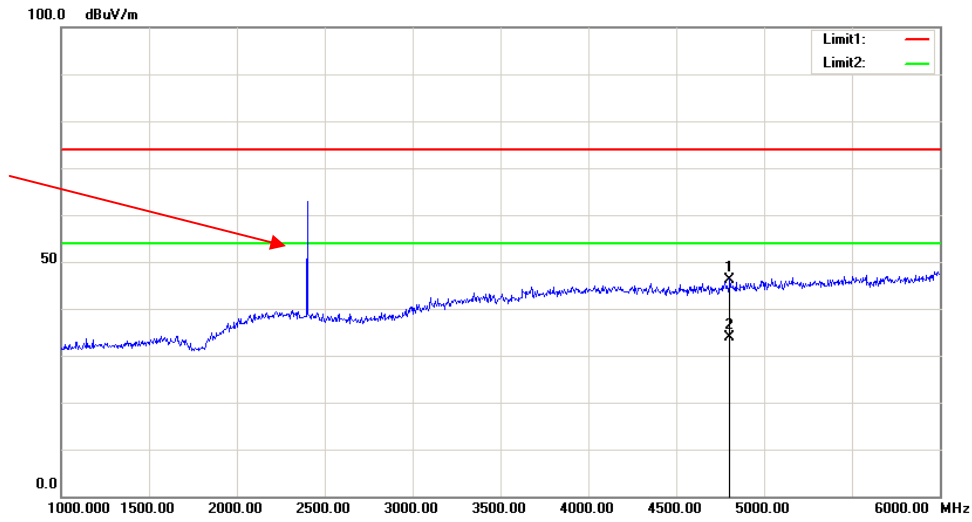

**Vertical**

Fundamental Test with Band Rejection Filter

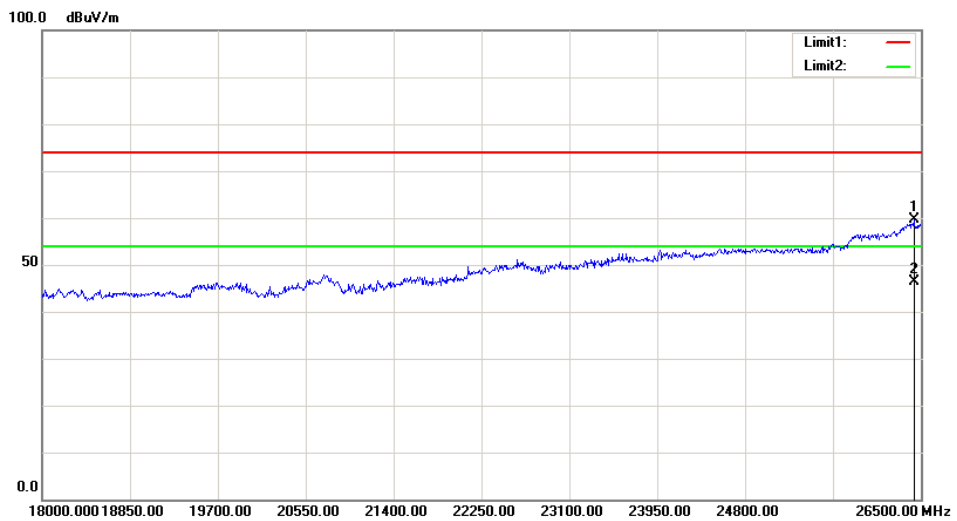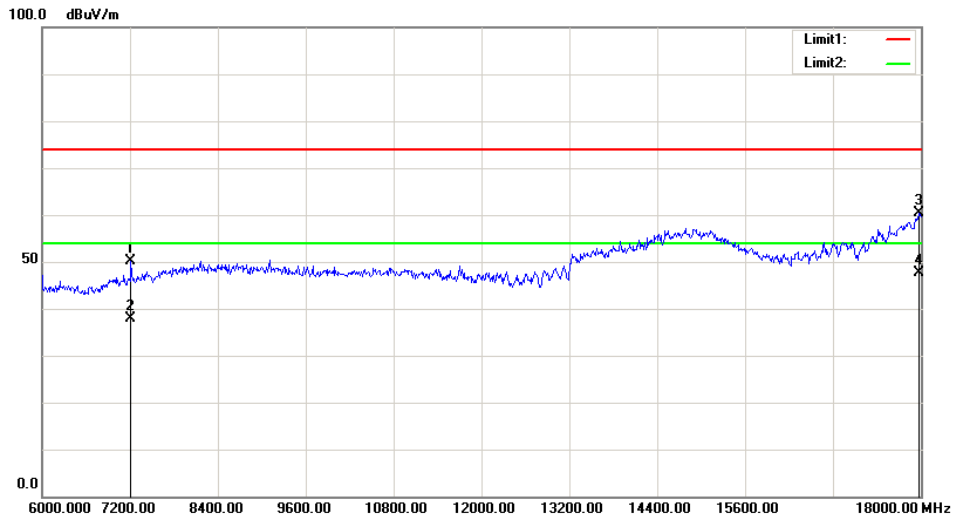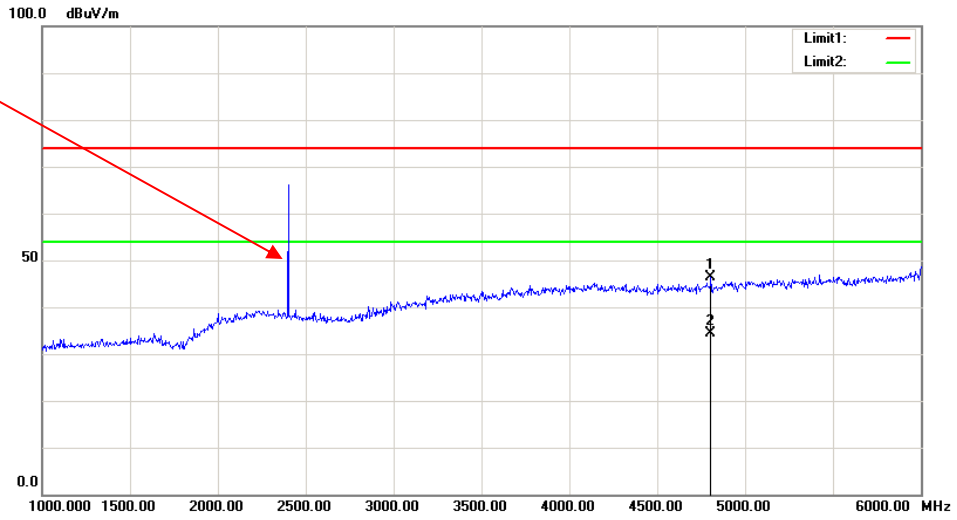

## FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

### Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2017-12-08	2018-12-08
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

### Test Data

#### Environmental Conditions

Temperature:	27.3 °C
Relative Humidity:	55 %
ATM Pressure:	101.7 kPa

\* The testing was performed by Tiago Huang on 2018-06-27.

**Test Result:** Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
BDR (GFSK)	Low	2402	1.000	0.70
	Middle	2441	1.004	0.70
	High	2480	1.004	0.69
EDR (π/4-DQPSK)	Low	2402	1.000	0.88
	Middle	2441	1.000	0.87
	High	2480	1.000	0.86
EDR (8-DPSK)	Low	2402	1.000	0.84
	Middle	2441	1.000	0.84
	High	2480	1.004	0.83


Note: Limit = (2/3) × 20dB bandwidth

BDR Mode (GFSK):

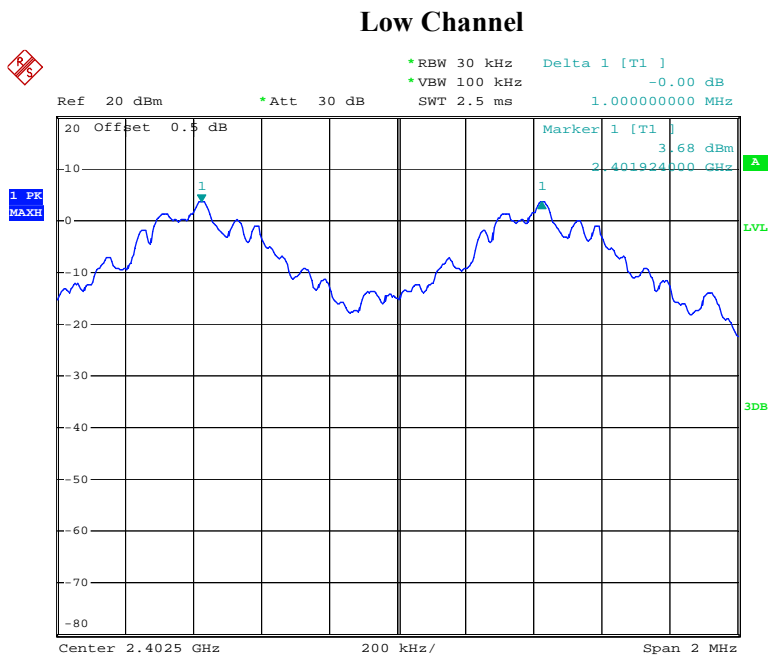


Date: 27.JUN.2018 21:54:46

### Middle Channel

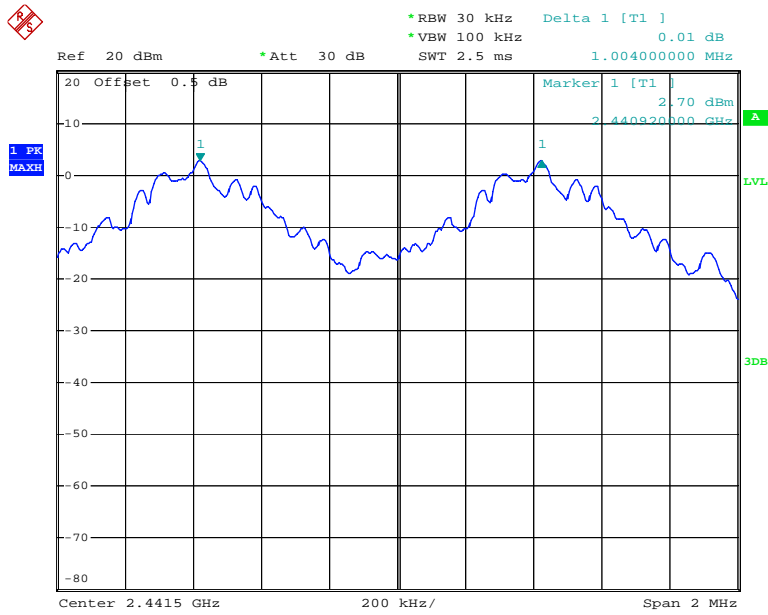

Date: 27.JUN.2018 21:56:02


### High Channel

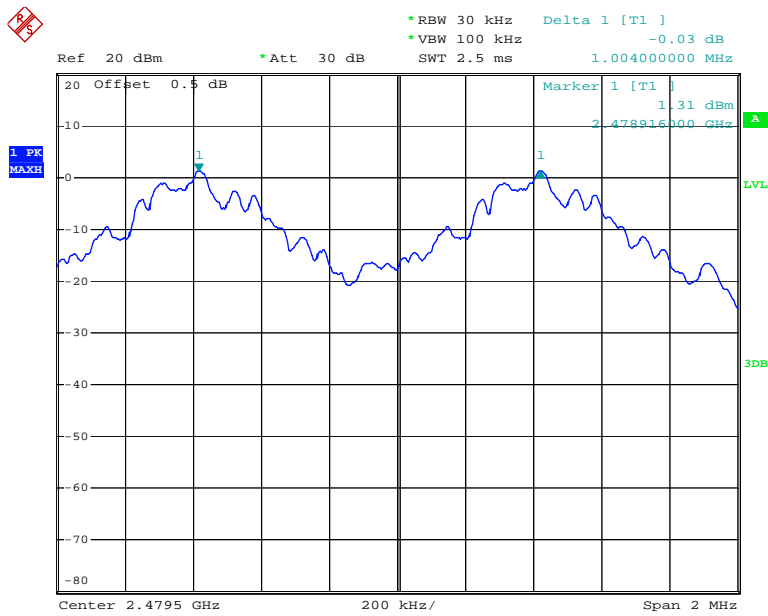

Date: 27.JUN.2018 21:59:32


EDR Mode ( $\pi/4$ -DQPSK):

### Low Channel

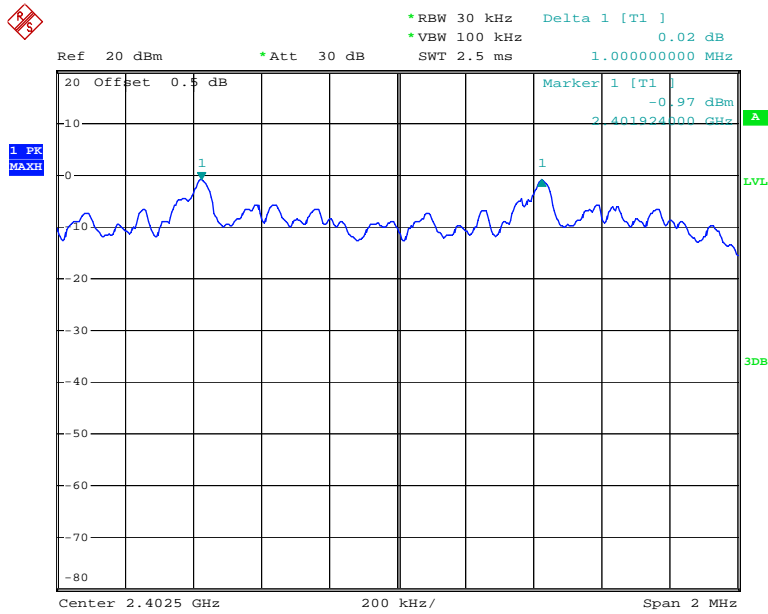

Date: 27.JUN.2018 22:00:36


### Middle Channel

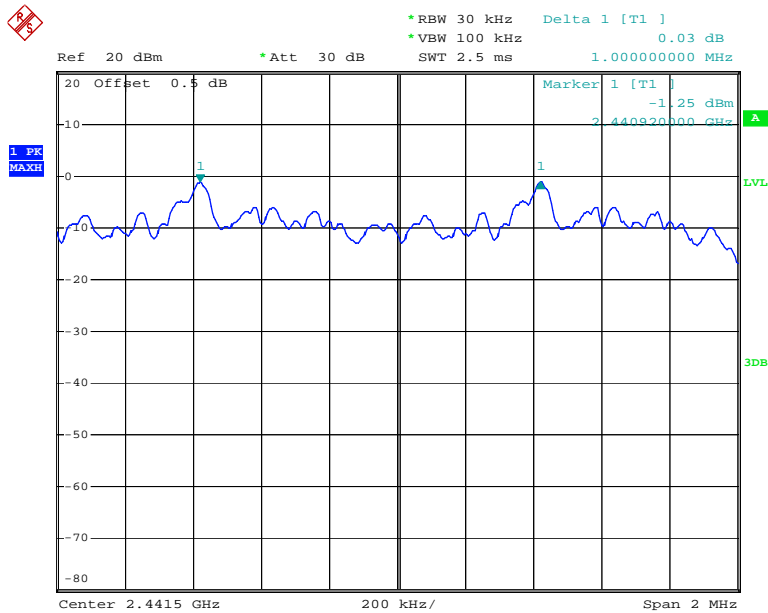

Date: 27.JUN.2018 22:02:24




### High Channel

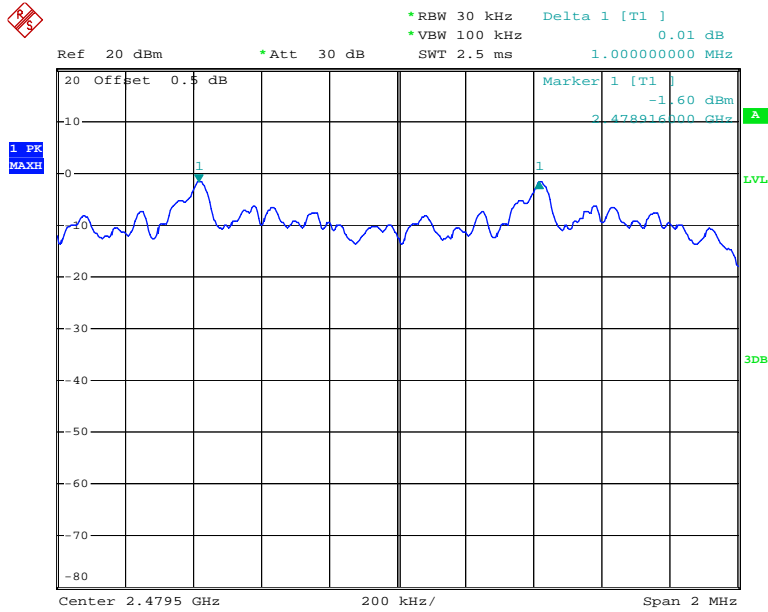

Date: 27.JUN.2018 22:03:26


EDR Mode (8-DPSK):

### Low Channel

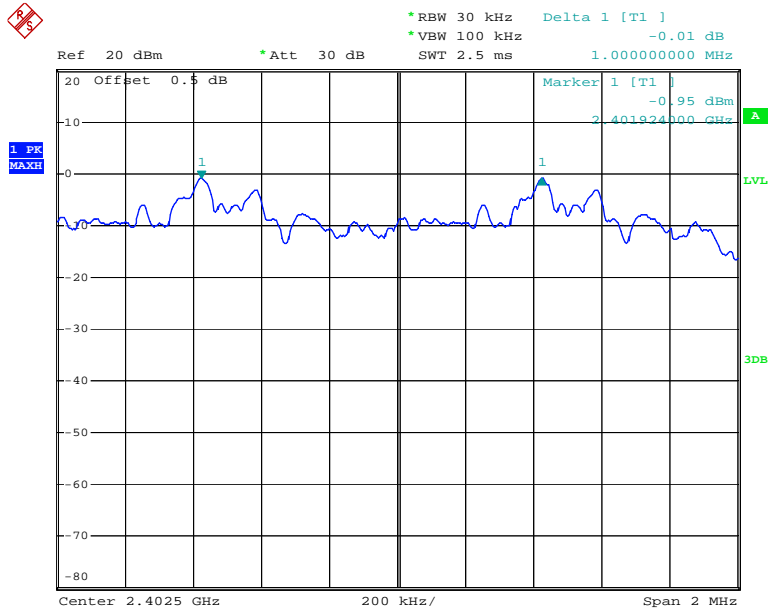


Date: 27.JUN.2018 22:04:52

### Middle Channel

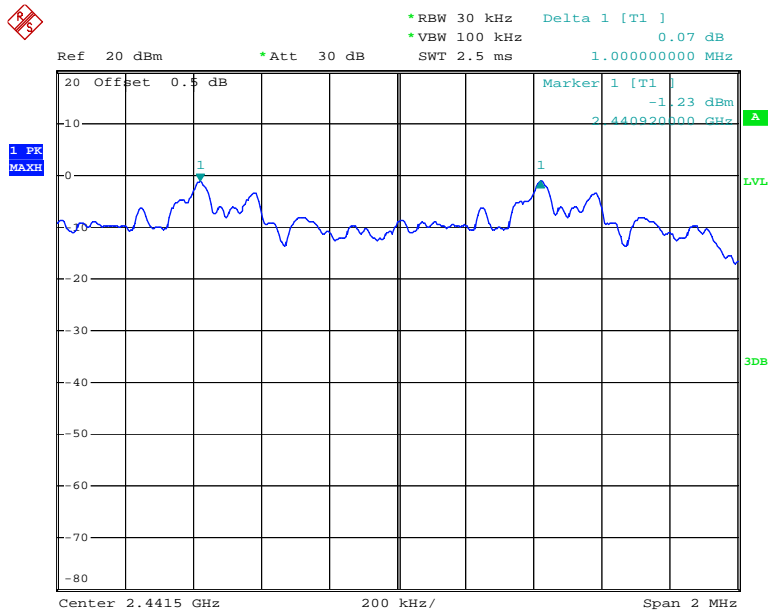

Date: 27.JUN.2018 22:05:52

### High Channel

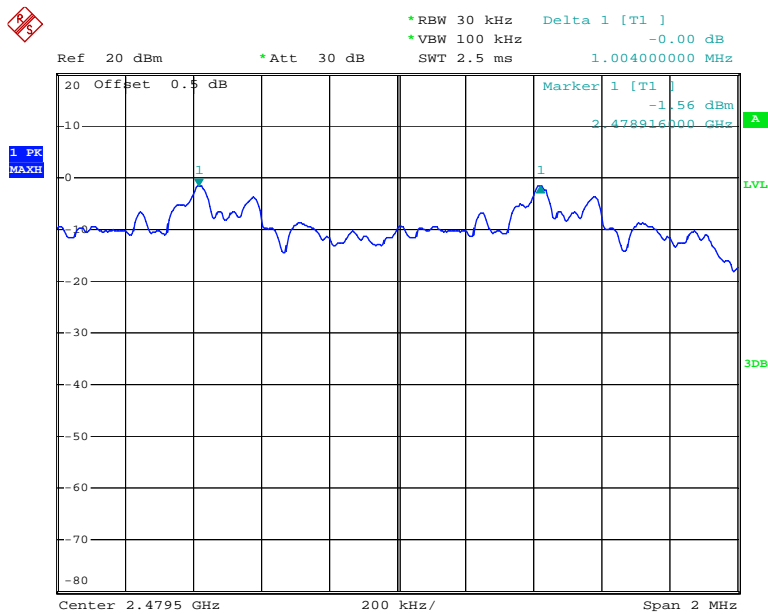

Date: 27.JUN.2018 22:07:23

## FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

### Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2017-12-08	2018-12-08
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	27.3 °C
Relative Humidity:	55 %
ATM Pressure:	101.7kPa

\* The testing was performed by Andy Huang on 2018-06-27.

**Test Result:** Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	1.05
	Middle	2441	1.05
	High	2480	1.04
EDR Mode ( $\pi/4$ -DQPSK)	Low	2402	1.32
	Middle	2441	1.30
	High	2480	1.29
EDR Mode (8-DPSK)	Low	2402	1.26
	Middle	2441	1.26
	High	2480	1.24


BDR Mode (GFSK):

Low Channel

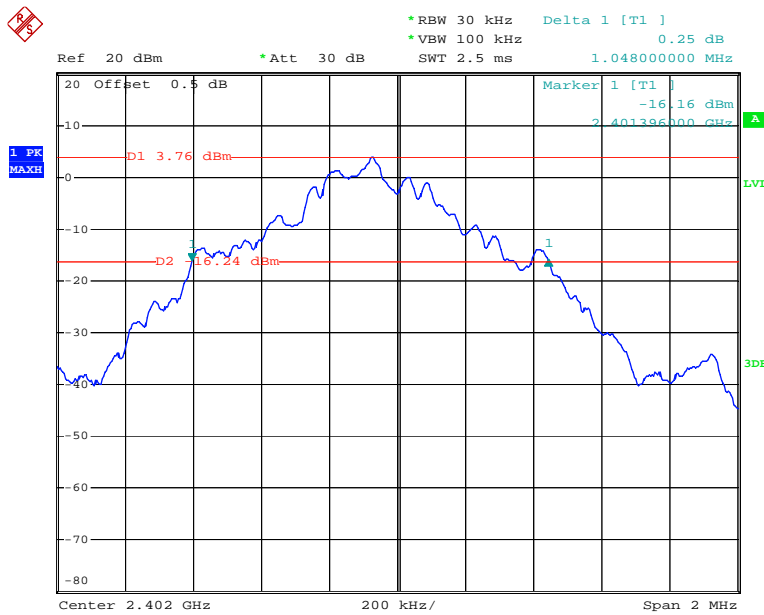


Date: 27.JUN.2018 20:55:48

### Middle Channel

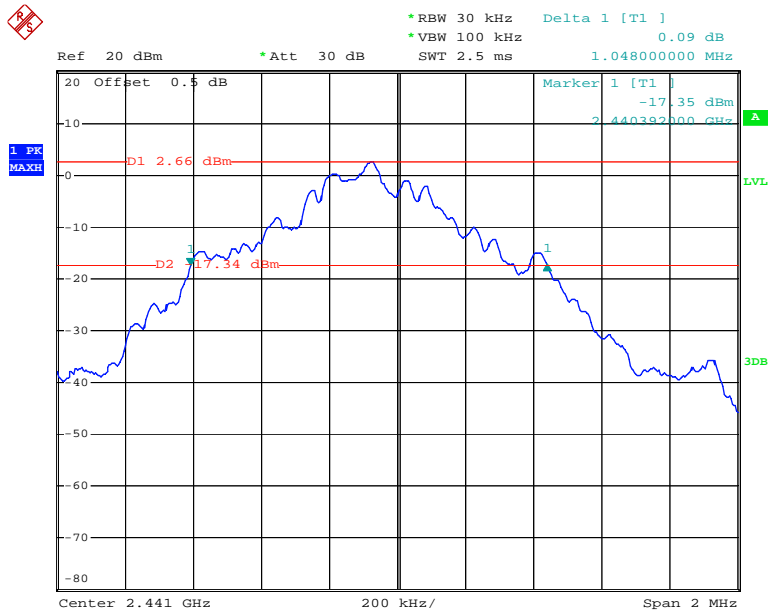

Date: 27.JUN.2018 20:58:51


### High Channel

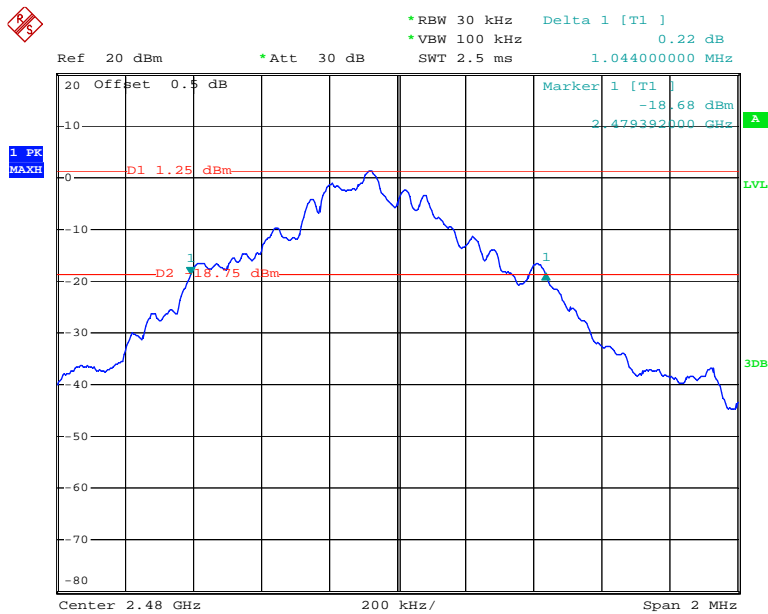

Date: 27.JUN.2018 21:01:47


EDR Mode ( $\pi/4$ -DQPSK):

### Low Channel

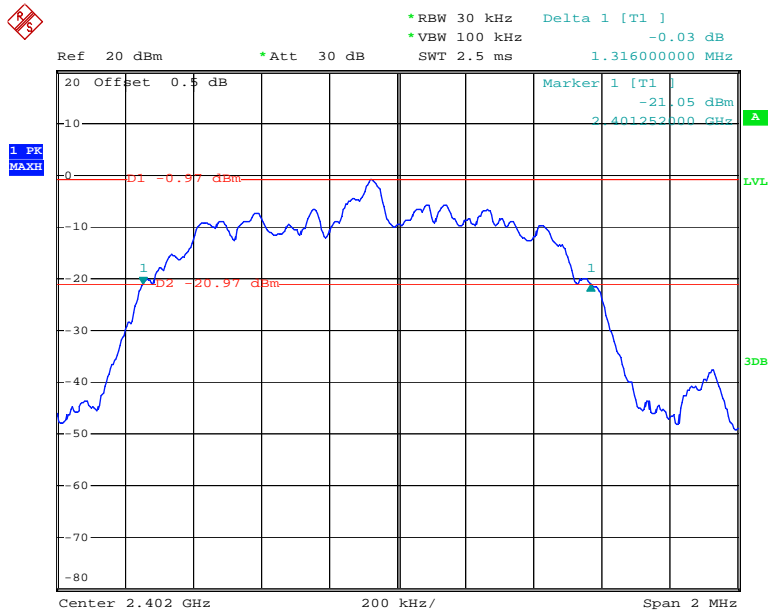


Date: 27.JUN.2018 21:04:49

### Middle Channel

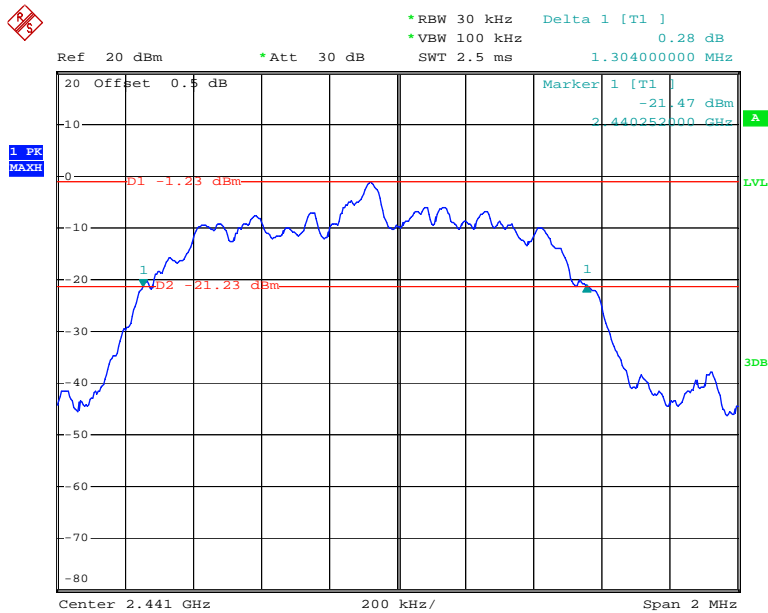

Date: 27.JUN.2018 21:09:03


### High Channel

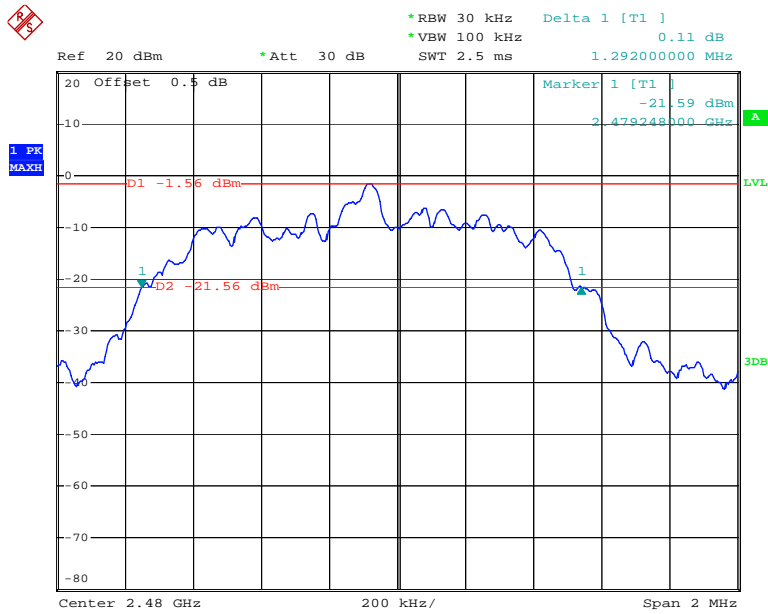

Date: 27.JUN.2018 21:11:26


EDR Mode (8-DPSK):

### Low Channel

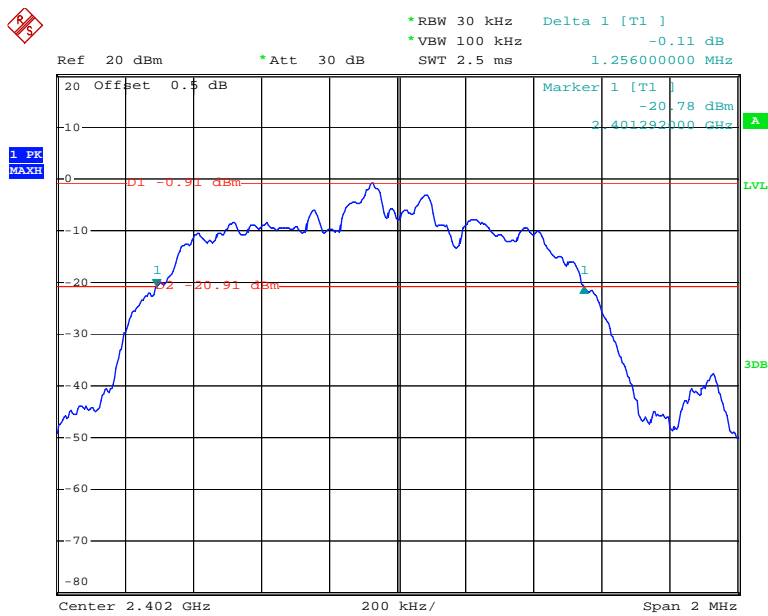


Date: 27.JUN.2018 21:13:54

### Middle Channel

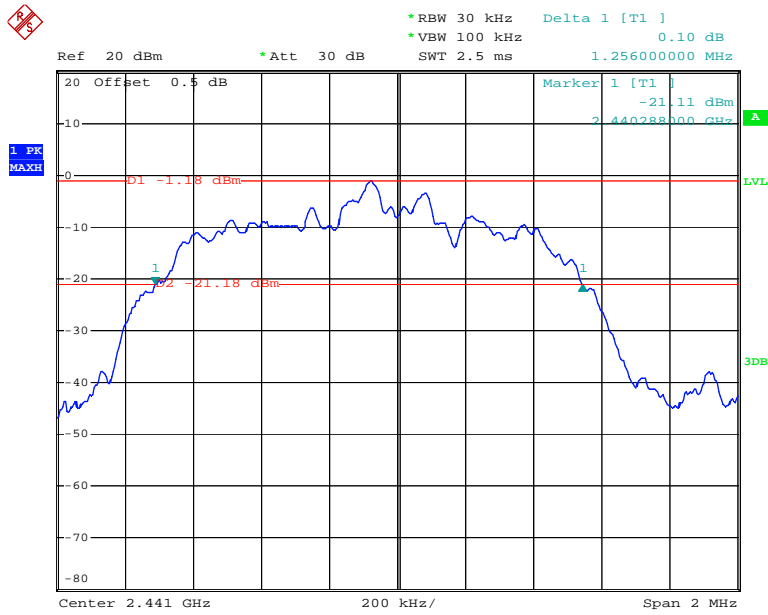

Date: 27.JUN.2018 21:16:59

### High Channel

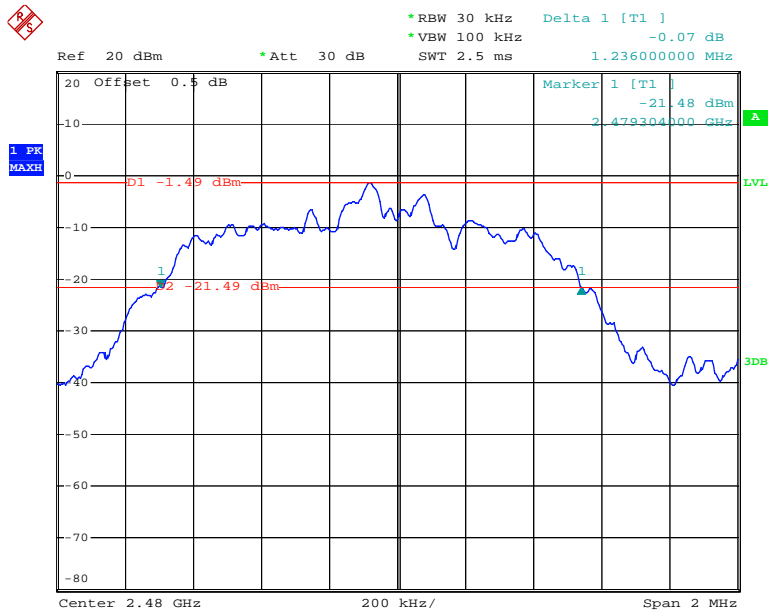

Date: 27.JUN.2018 21:19:41



## **FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST**

### **Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### **Test Procedure**

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

### **Test Equipment List and Details**

<b>Manufacturer</b>	<b>Description</b>	<b>Model</b>	<b>Serial Number</b>	<b>Calibration Date</b>	<b>Calibration Due Date</b>
R&S	Spectrum Analyzer	FSP 38	100478	2017-12-08	2018-12-08
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	27.3 °C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101.7kPa

\* *The testing was performed by Tiago Huang on 2018-06-27.*

**Test Result:** Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

BDR Mode (GFSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

### Number of Hopping Channels

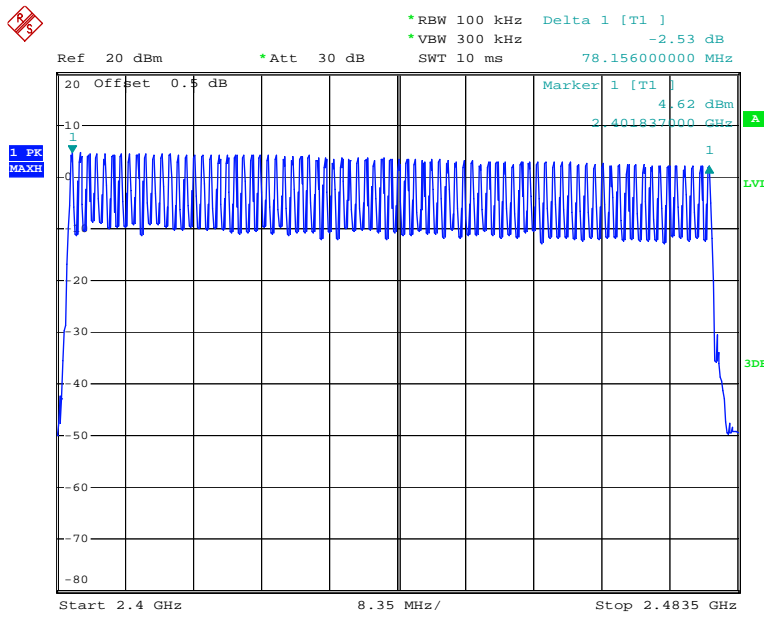


Date: 27.JUN.2018 21:26:45

EDR Mode ( $\pi/4$ -DQPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	$\geq 15$

### Number of Hopping Channels

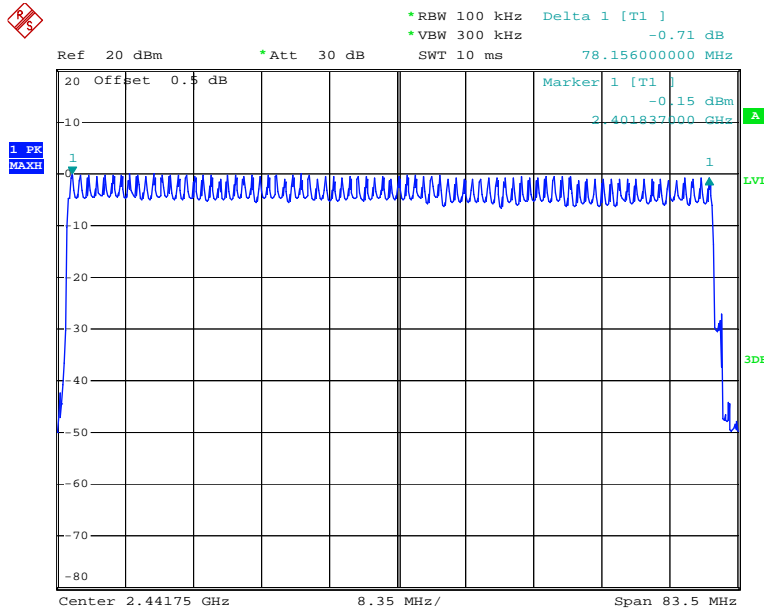


Date: 27.JUN.2018 21:33:14

EDR Mode (8-DPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

### Number of Hopping Channels

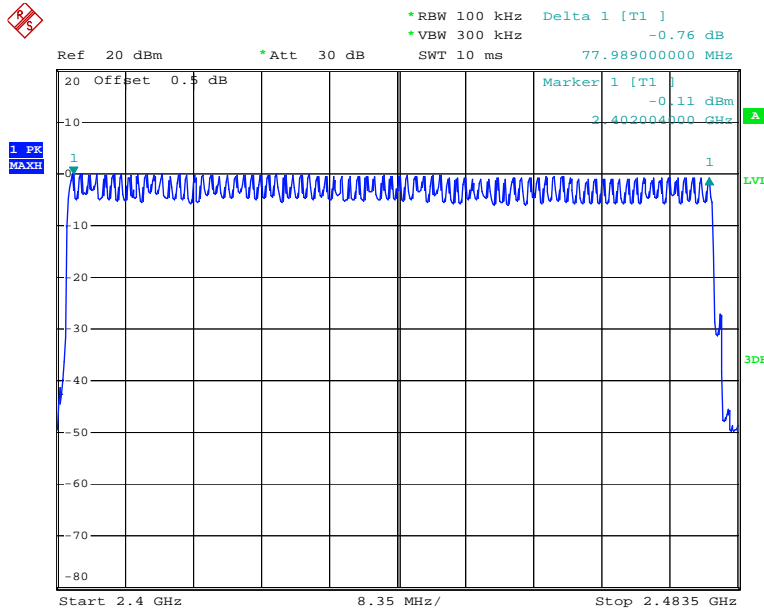

Date: 27.JUN.2018 21:39:58

## **FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**

### **Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### **Test Procedure**

The EUT was worked in channel hopping; the time of single pulses was tested.

### **Test Equipment List and Details**

<b>Manufacturer</b>	<b>Description</b>	<b>Model</b>	<b>Serial Number</b>	<b>Calibration Date</b>	<b>Calibration Due Date</b>
R&S	Spectrum Analyzer	FSP 38	100478	2017-12-08	2018-12-08
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	27.3 °C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101.7kPa

\* *The testing was performed by Tiago Huang on 2018-06-27.*

**Test Result:** Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

BDR Mode (GFSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH1	Low	0.428	0.137	0.4	Compliance
	Middle	0.428	0.137	0.4	Compliance
	High	0.430	0.138	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/2/79) ×31.6 s				
DH3	Low	1.698	0.272	0.4	Compliance
	Middle	1.698	0.272	0.4	Compliance
	High	1.706	0.273	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/4/79) ×31.6 s				
DH5	Low	2.960	0.316	0.4	Compliance
	Middle	2.956	0.315	0.4	Compliance
	High	2.950	0.315	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/6/79) ×31.6 s				

DH1: Low Channel

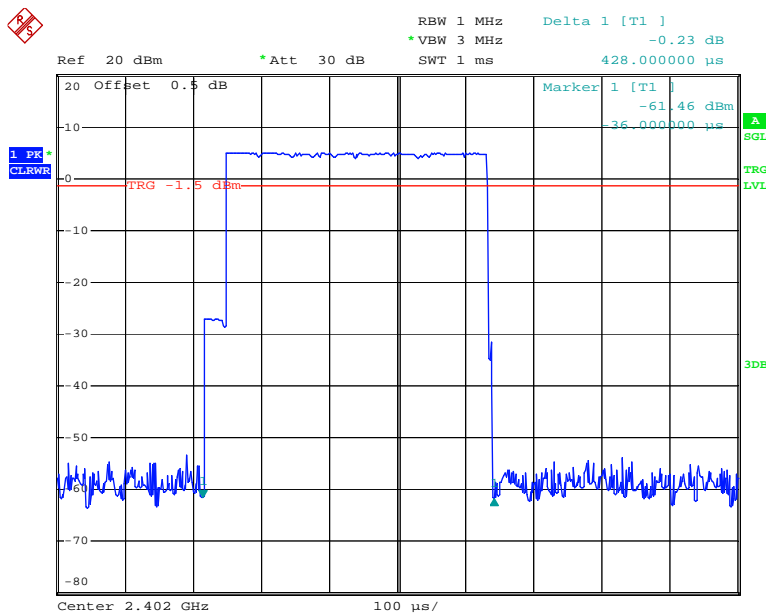


Date: 27.JUN.2018 21:41:02

### DH1: Middle Channel

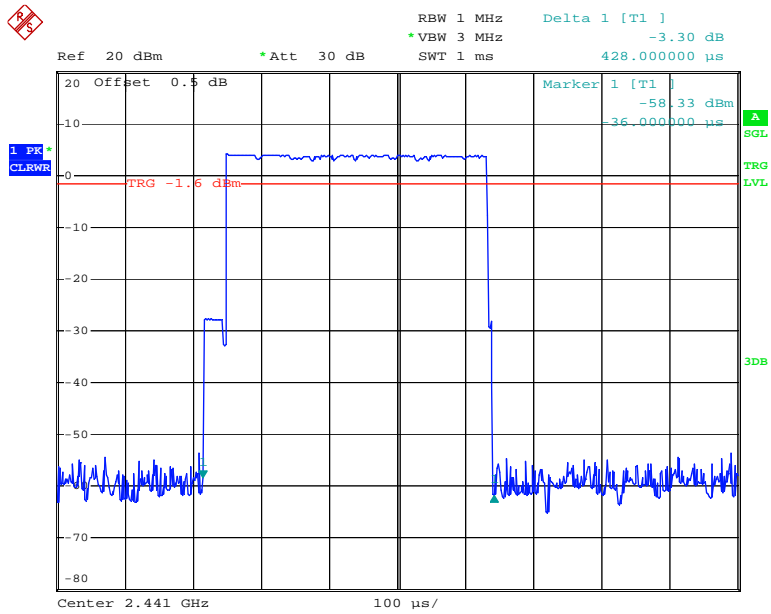


Date: 27.JUN.2018 21:41:07

### DH1: High Channel

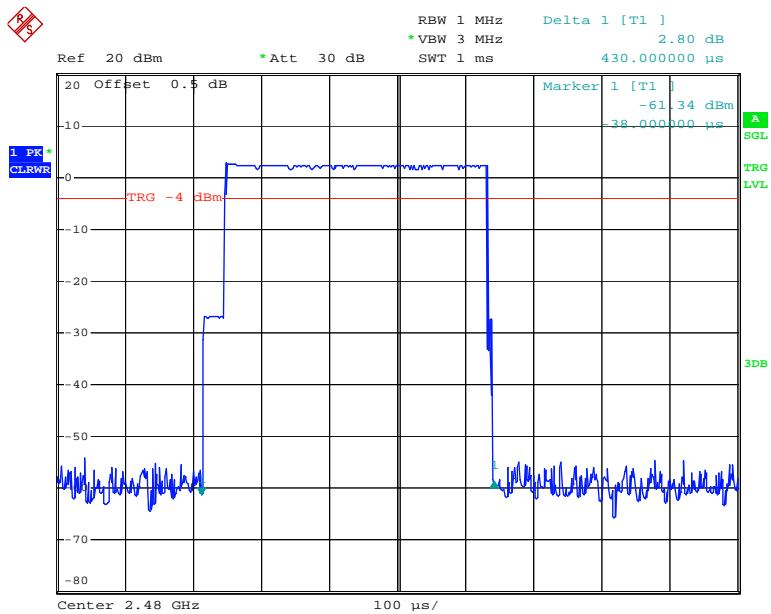


Date: 27.JUN.2018 21:41:11

### DH3: Low Channel

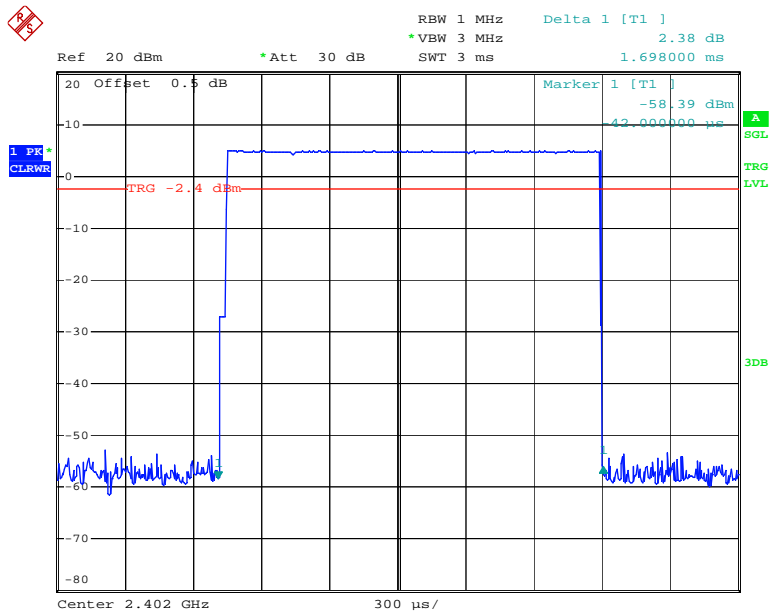

Date: 27.JUN.2018 21:41:40


### DH3: Middle Channel

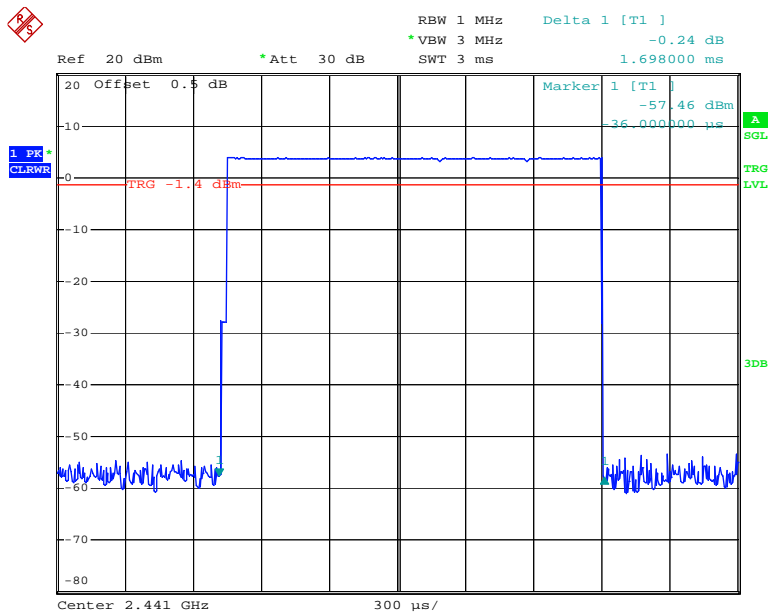

Date: 27.JUN.2018 21:41:44




### DH3: High Channel

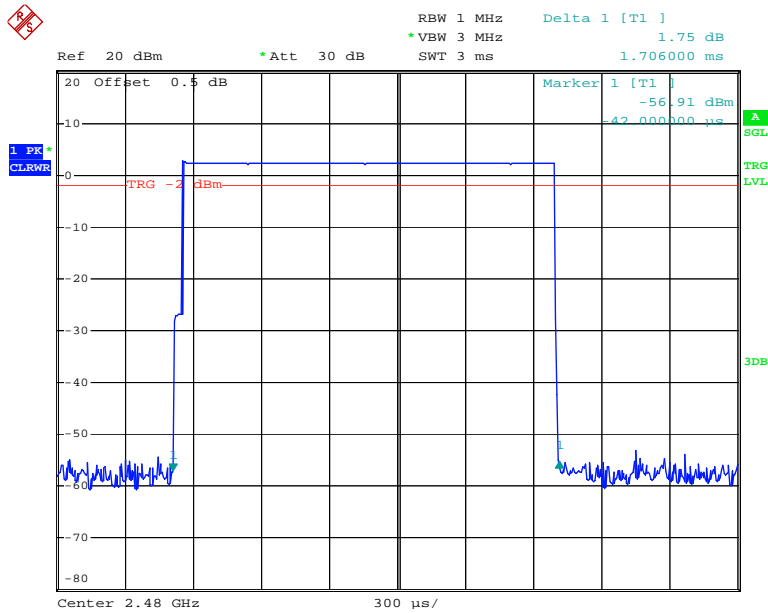


Date: 27.JUN.2018 23:14:11

### DH5: Low Channel

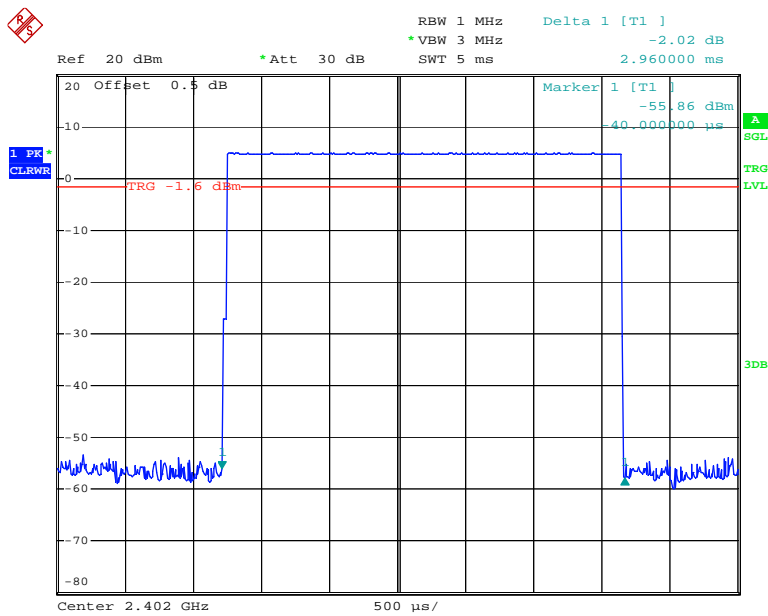


Date: 27.JUN.2018 21:44:39

### DH5: Middle Channel

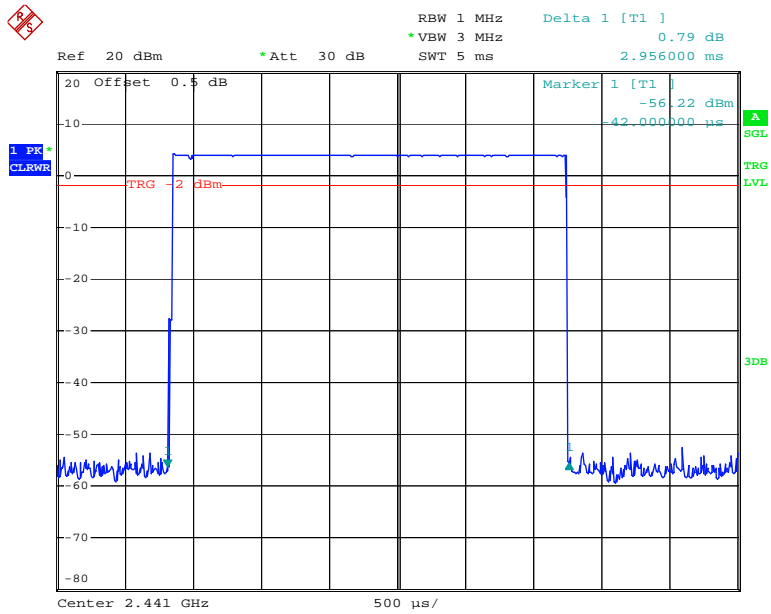

Date: 27.JUN.2018 23:15:35

### DH5: High Channel

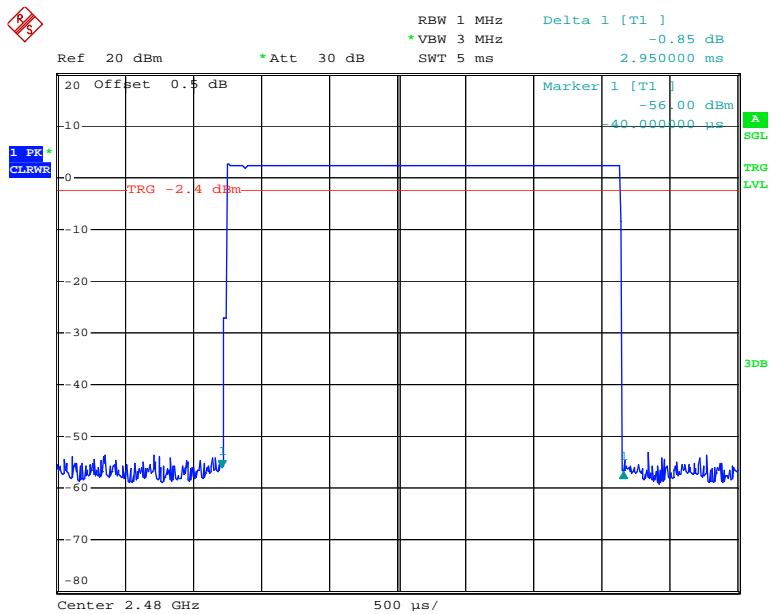


Date: 27.JUN.2018 21:44:48

EDR Mode ( $\pi/4$ -DQPSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
2DH1	Low	0.436	0.14	0.4	Compliance
	Middle	0.434	0.139	0.4	Compliance
	High	0.436	0.14	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s				
2DH3	Low	1.704	0.273	0.4	Compliance
	Middle	1.700	0.272	0.4	Compliance
	High	1.698	0.272	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s				
2DH5	Low	2.960	0.316	0.4	Compliance
	Middle	2.960	0.316	0.4	Compliance
	High	2.960	0.316	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s				

2DH1: Low Channel

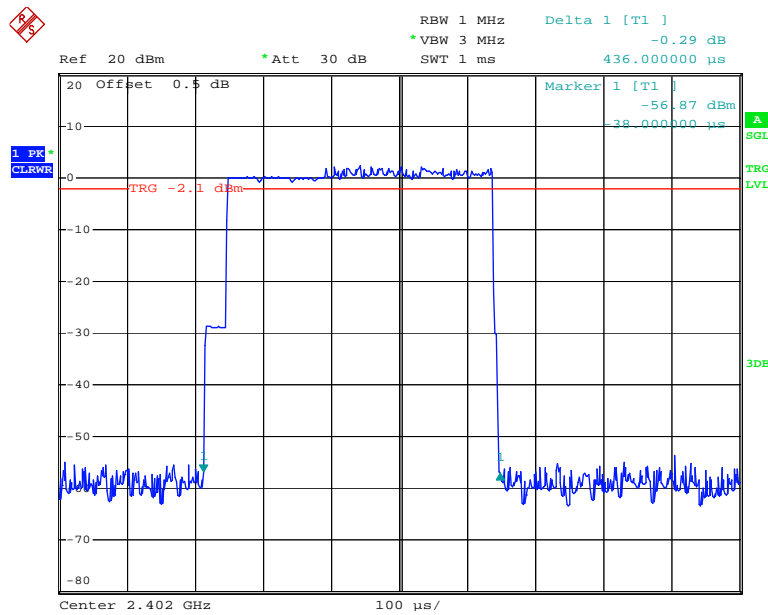


Date: 27.JUN.2018 21:45:22

### 2DH1: Middle Channel

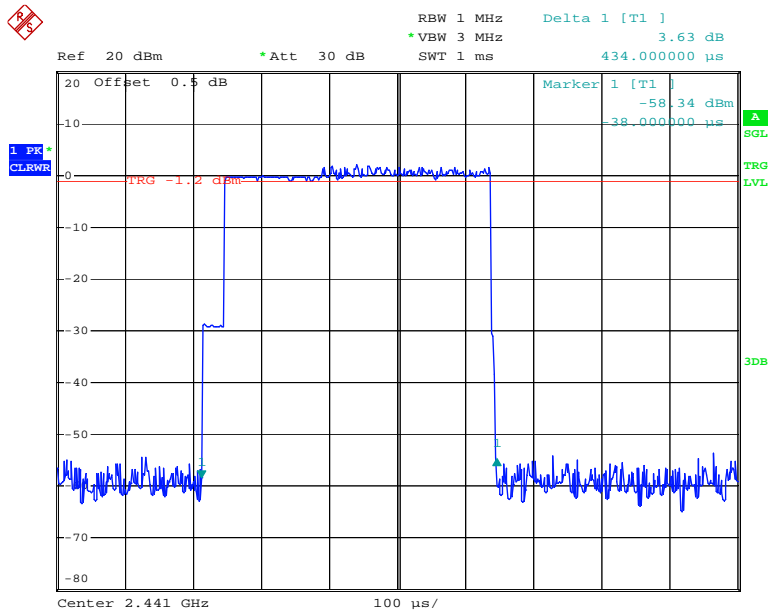


Date: 27.JUN.2018 21:45:26

### 2DH1: High Channel

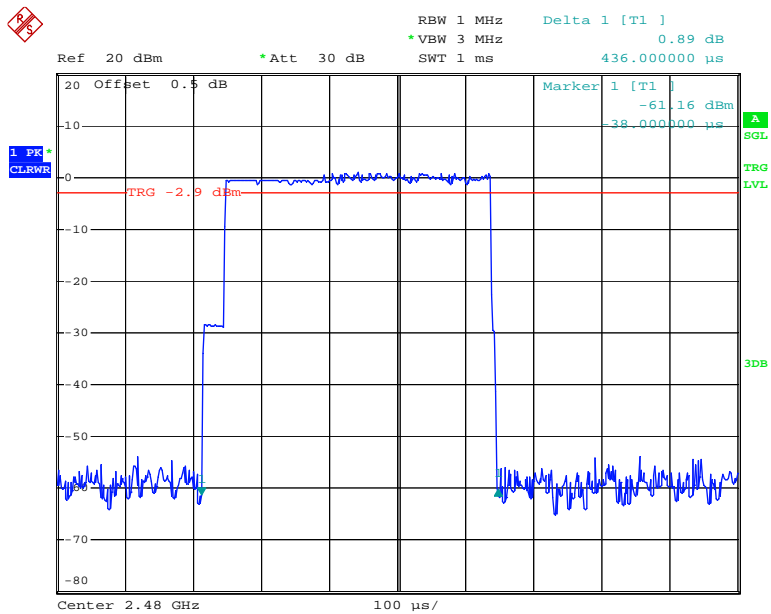


Date: 27.JUN.2018 21:45:30

### 2DH3: Low Channel

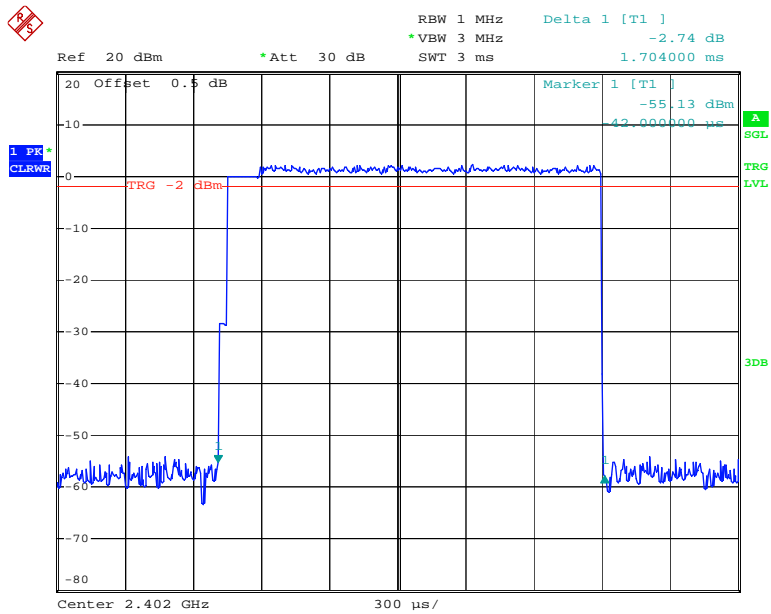


Date: 27.JUN.2018 21:47:22

### 2DH3: Middle Channel

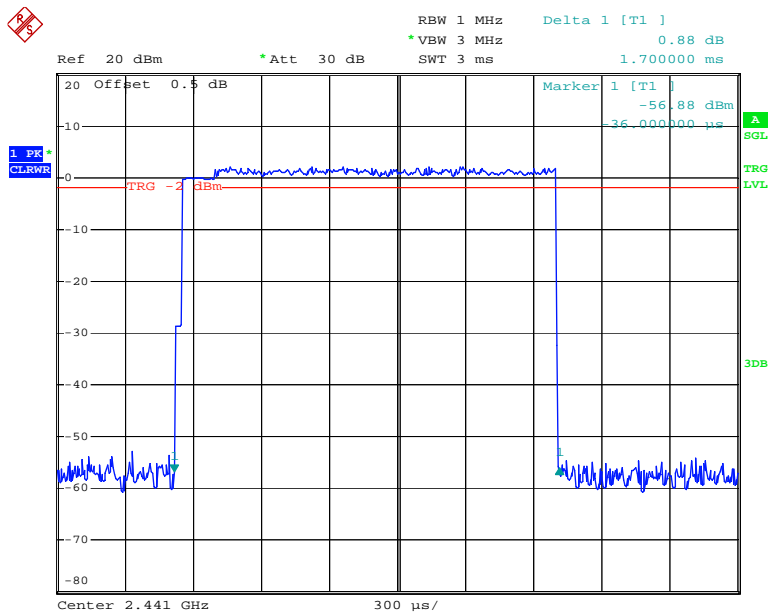


Date: 27.JUN.2018 23:07:34

### 2DH3: High Channel

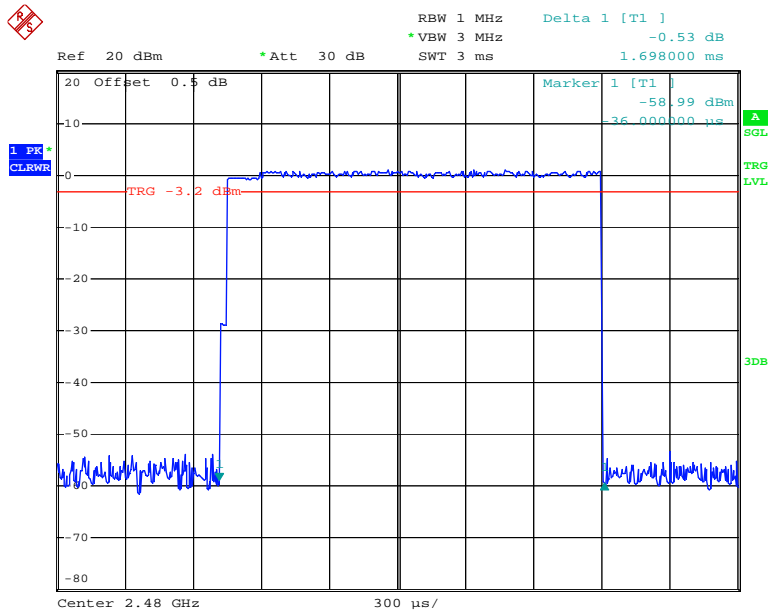


Date: 27.JUN.2018 21:47:31

### 2DH5: Low Channel

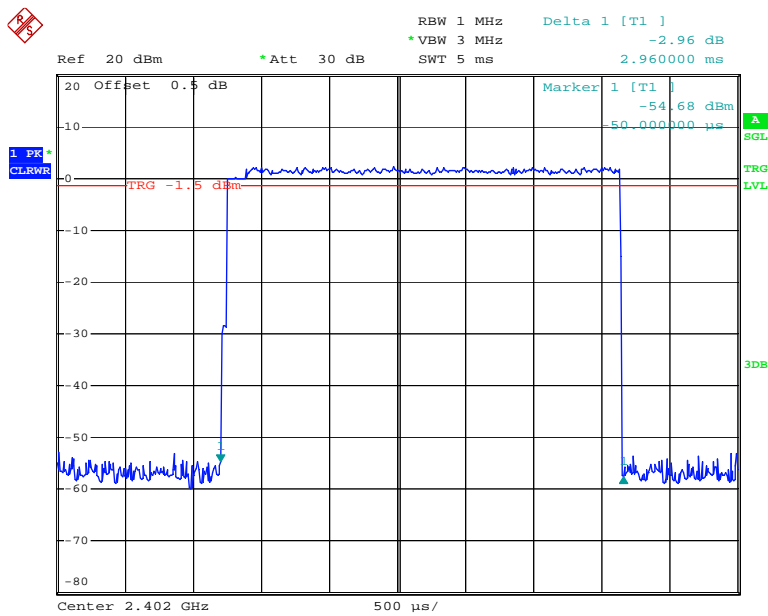


Date: 27.JUN.2018 21:48:15

### 2DH5: Middle Channel

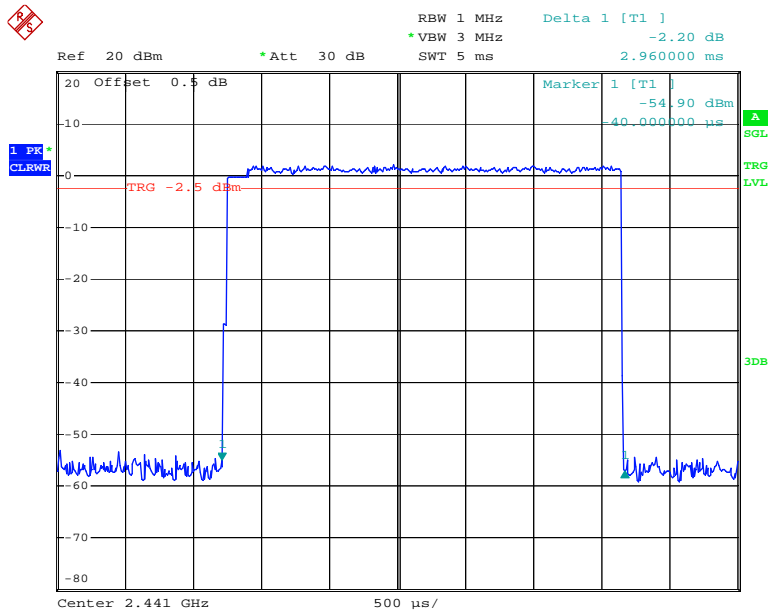

Date: 27.JUN.2018 21:48:19

### 2DH5: High Channel

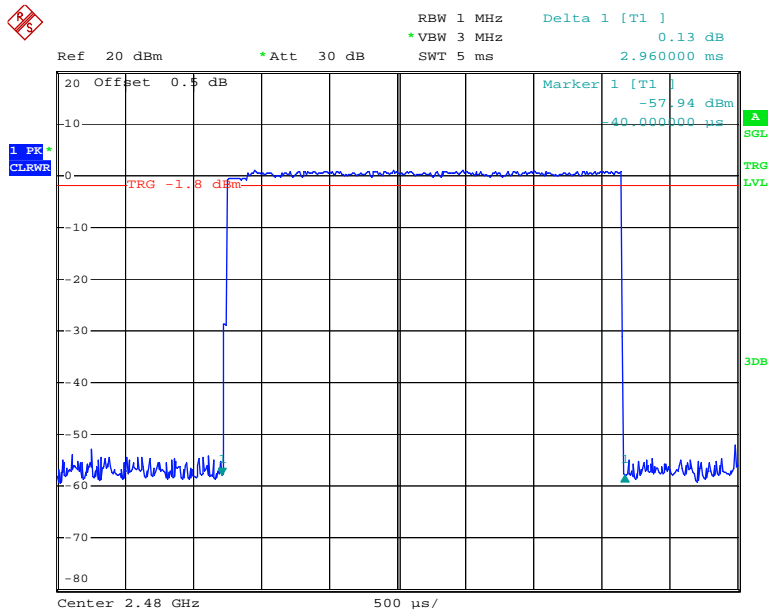


Date: 27.JUN.2018 21:48:24

EDR Mode (8-DPSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
3DH1	Low	0.434	0.139	0.4	Compliance
	Middle	0.434	0.139	0.4	Compliance
	High	0.434	0.139	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/2/79) ×31.6 s				
3DH3	Low	1.698	0.272	0.4	Compliance
	Middle	1.698	0.272	0.4	Compliance
	High	1.712	0.274	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/4/79) ×31.6 s				
3DH5	Low	2.960	0.316	0.4	Compliance
	Middle	2.960	0.316	0.4	Compliance
	High	2.950	0.315	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/6/79) ×31.6 s				


3DH1: Low Channel

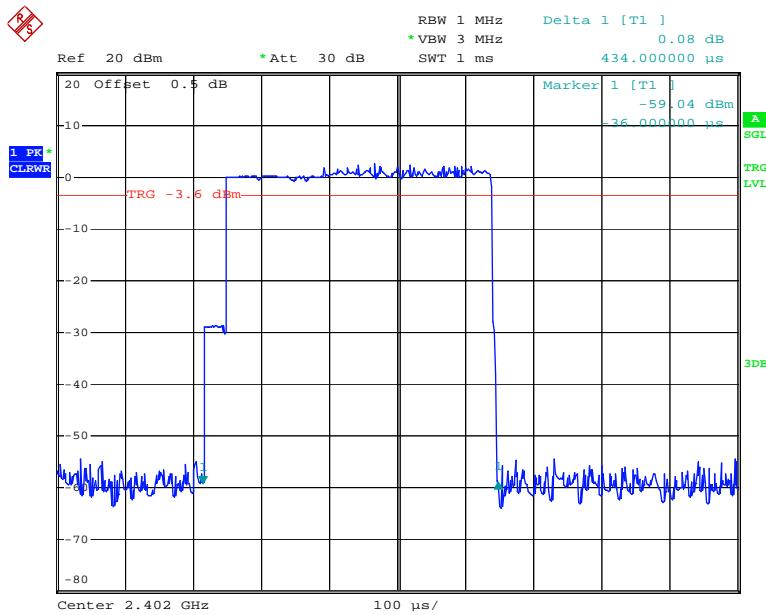

Date: 27.JUN.2018 21:49:29




### 3DH1: Middle Channel

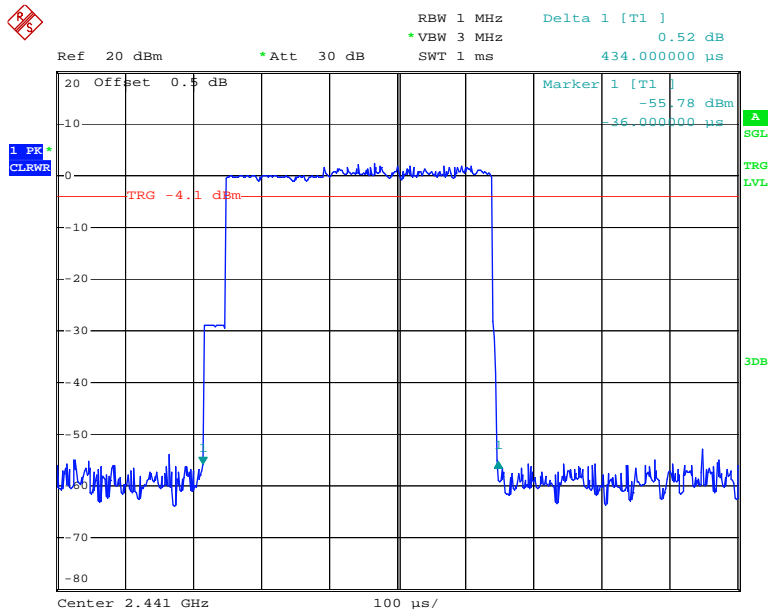


Date: 27.JUN.2018 21:49:35

### 3DH1: High Channel

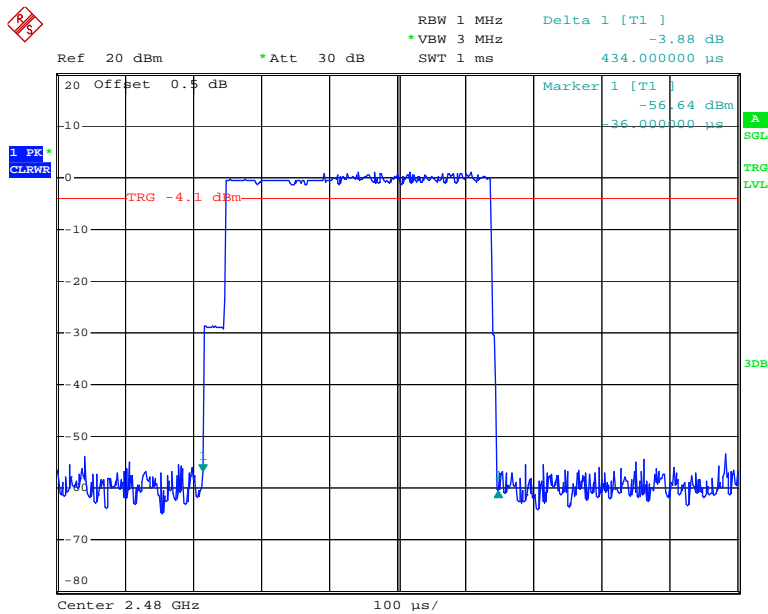


Date: 27.JUN.2018 21:49:40

### 3DH3: Low Channel

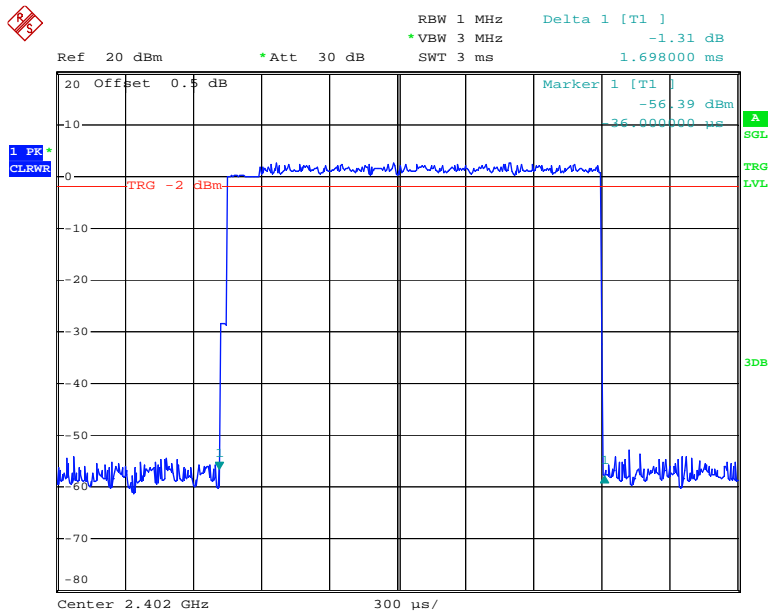


Date: 27.JUN.2018 21:50:26

### 3DH3: Middle Channel

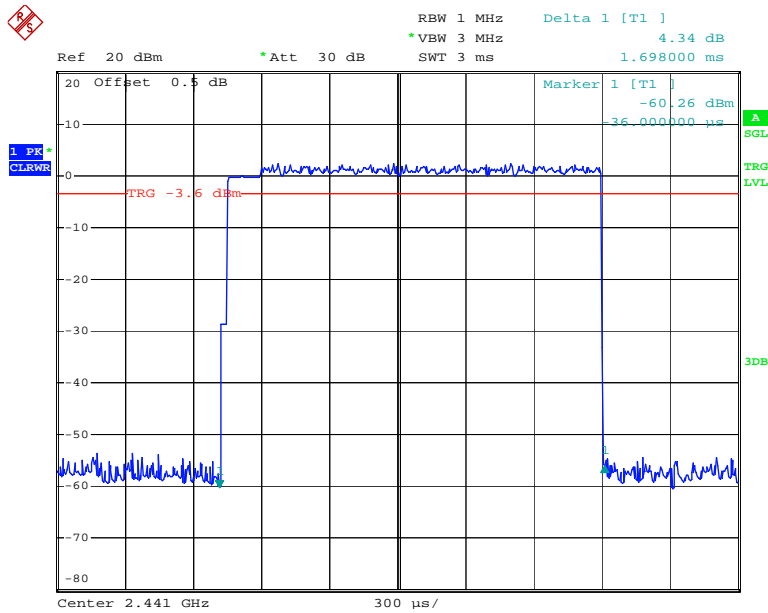


Date: 27.JUN.2018 21:50:30

### 3DH3: High Channel

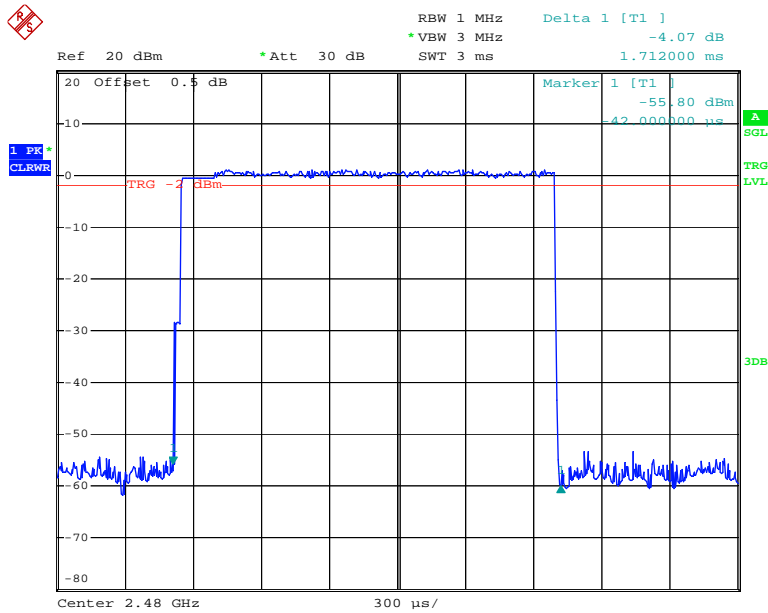


Date: 27.JUN.2018 23:07:05

### 3DH5: Low Channel

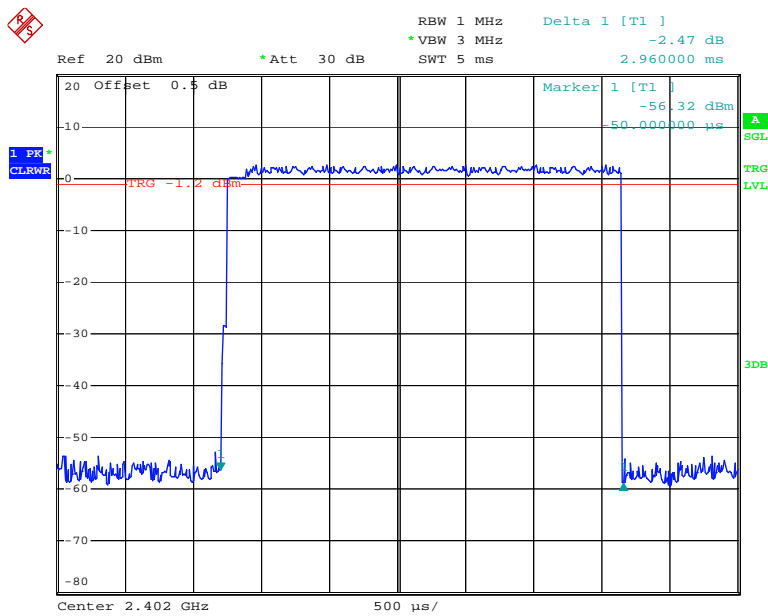


Date: 27.JUN.2018 21:51:29

### 3DH5: Middle Channel

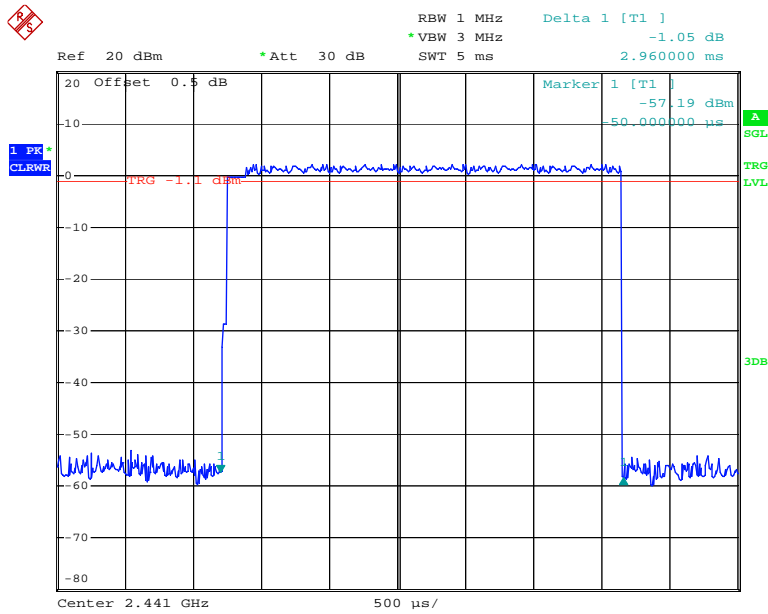

Date: 27.JUN.2018 21:51:34

### 3DH5: High Channel

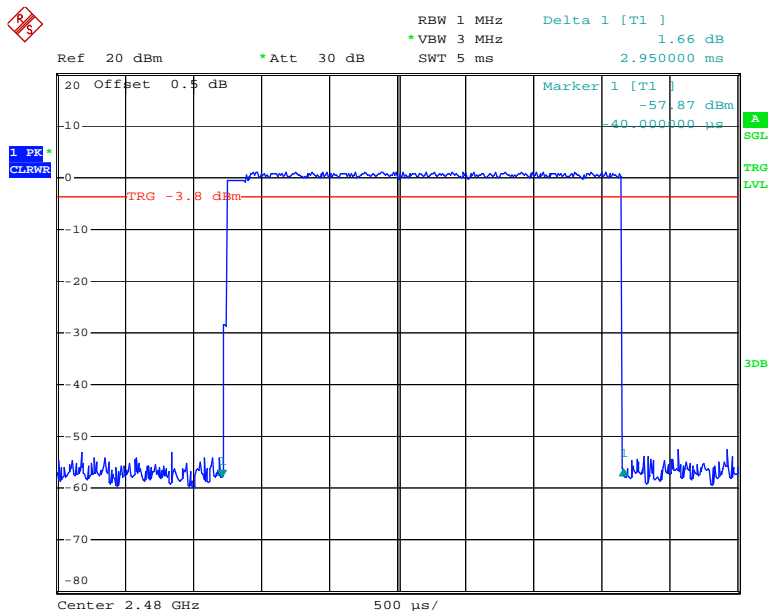

Date: 27.JUN.2018 21:51:39

## FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

### Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

### Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	27.3 °C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101.7kPa

\* *The testing was performed by Tiago Huang on 2018-06-27.*

**Test Result:** Compliance.

*Test Mode: Transmitting*

<b>Mode</b>	<b>Frequency (MHz)</b>	<b>Peak Conducted Output power (dBm)</b>	<b>Limit (dBm)</b>
BDR Mode (GFSK)	2402	5.05	21
	2441	4.28	21
	2480	2.91	21
EDR Mode ( $\pi/4$ -DQPSK)	2402	2.82	21
	2441	2.45	21
	2480	1.32	21
EDR Mode (8-DPSK)	2402	3.27	21
	2441	2.85	21
	2480	1.66	21

Note: The data above was tested in conducted mode.

## FCC §15.247(d) - BAND EDGES TESTING

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW/ VBW of spectrum analyzer to 100/300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2017-12-08	2018-12-08
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	27.3 °C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101.7kPa


\* The testing was performed by Tiago Huang on 2018-06-27.

**Test Result: Compliance**

Single mode:

BDR Mode (GFSK):


**Band Edge, Left Side**

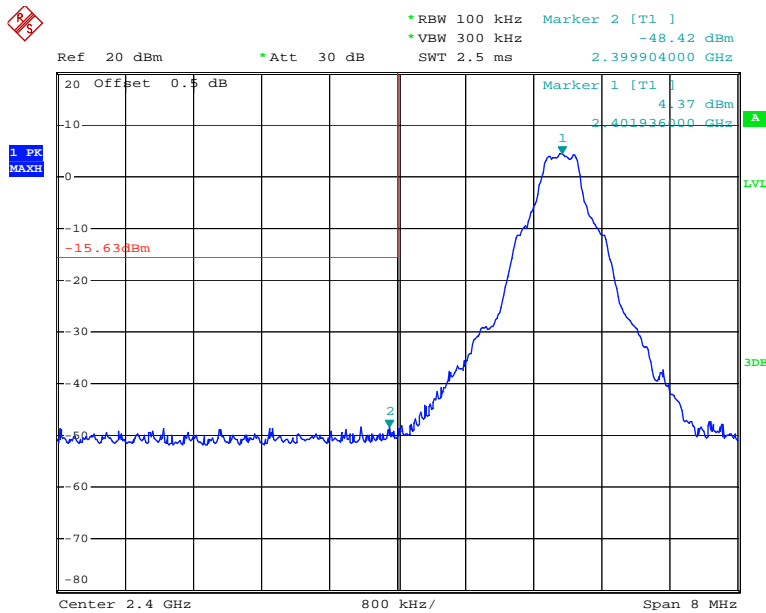

Date: 27.JUN.2018 20:57:03




**Band Edge, Right Side**

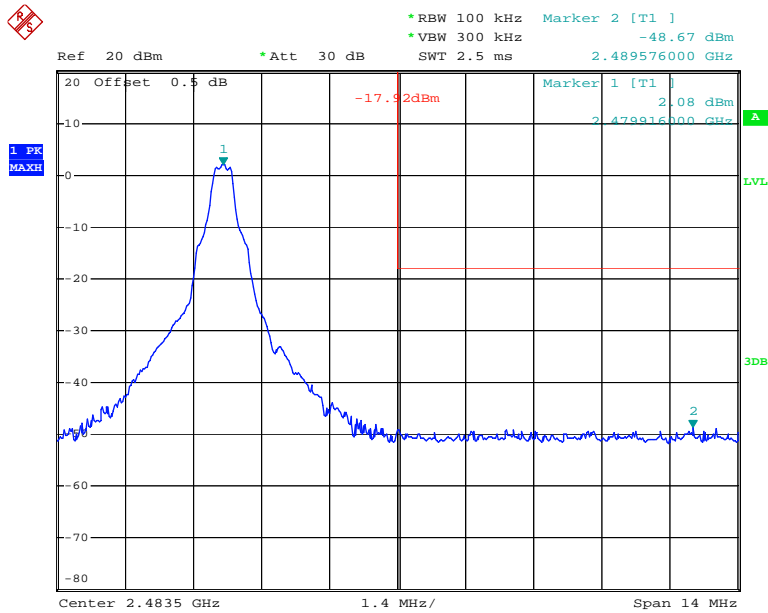

Date: 27.JUN.2018 21:03:03


*EDR Mode ( $\pi/4$ -DQPSK):*

**Band Edge, Left Side**

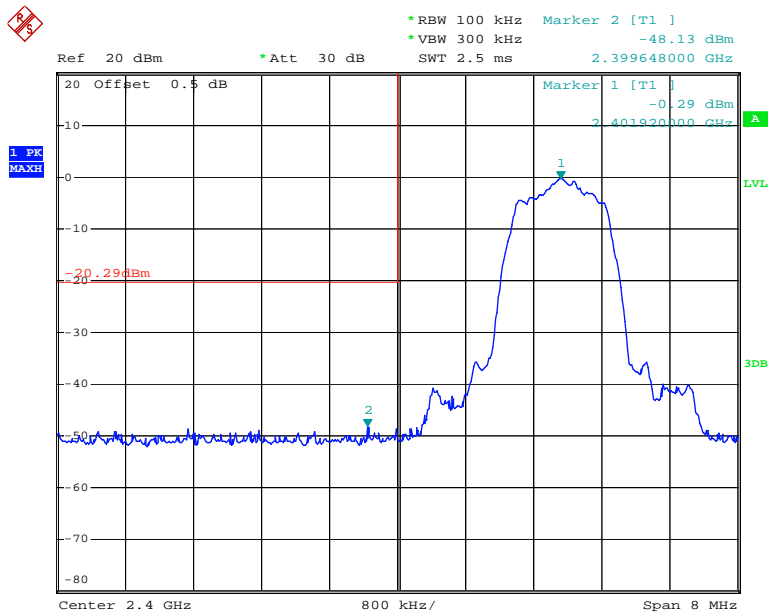

Date: 27.JUN.2018 21:06:05


### Band Edge, Right Side

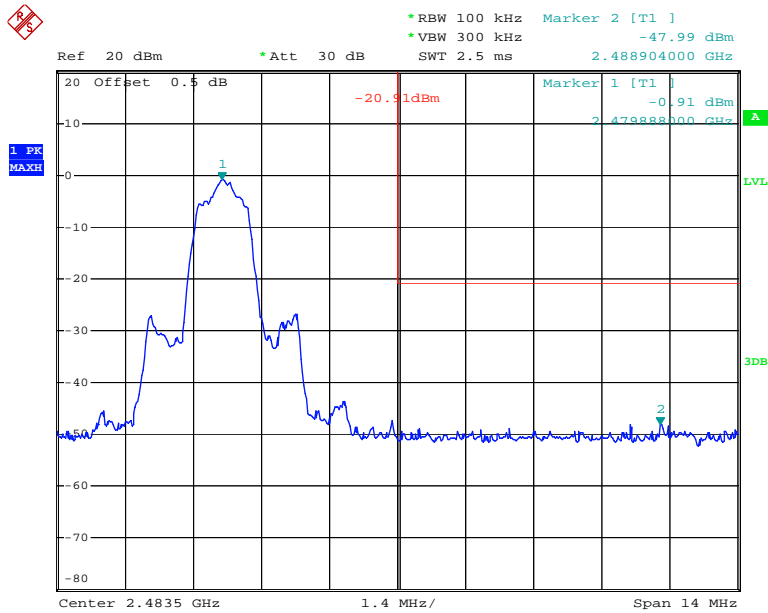

Date: 27.JUN.2018 21:12:42


### EDR Mode (8-DPSK):

### Band Edge, Left Side

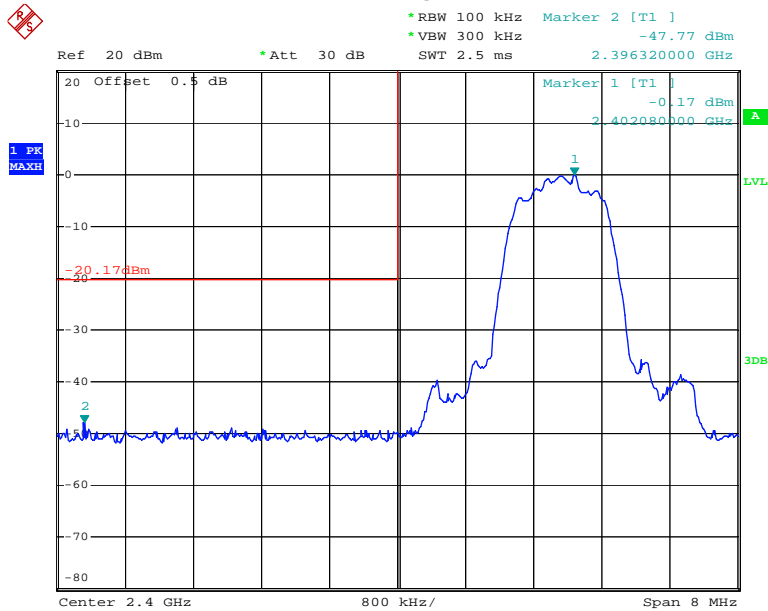

Date: 27.JUN.2018 21:15:33


### Band Edge, Right Side

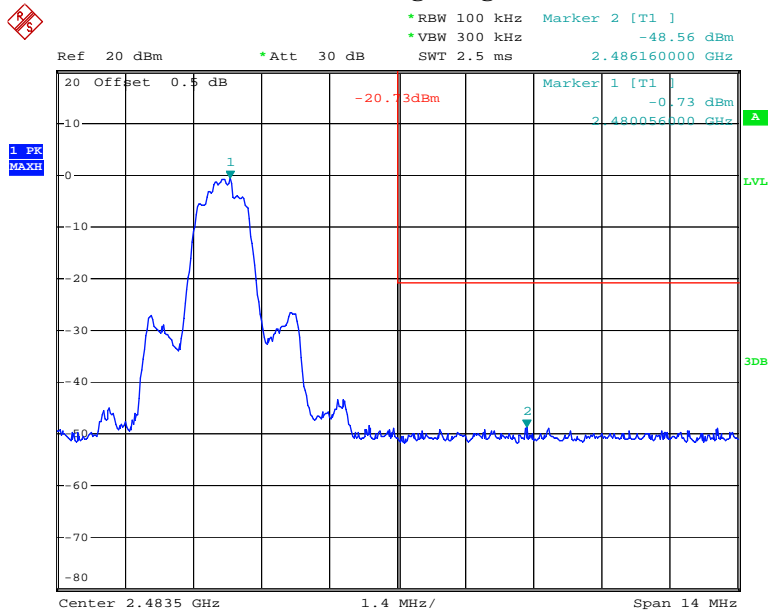

Date: 27.JUN.2018 21:20:58


Hopping mode:  
BDR Mode (GFSK):

### Band Edge, Left Side

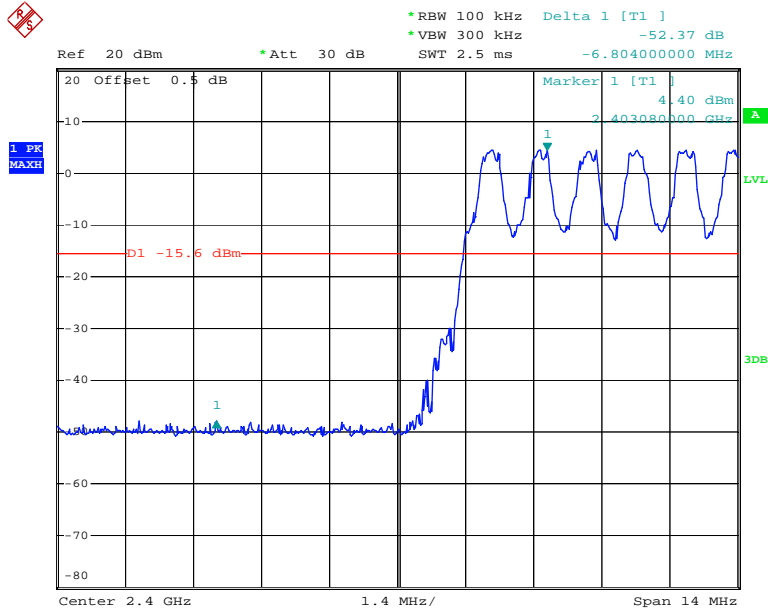

Date: 27.JUN.2018 22:12:22


### Band Edge, Right Side

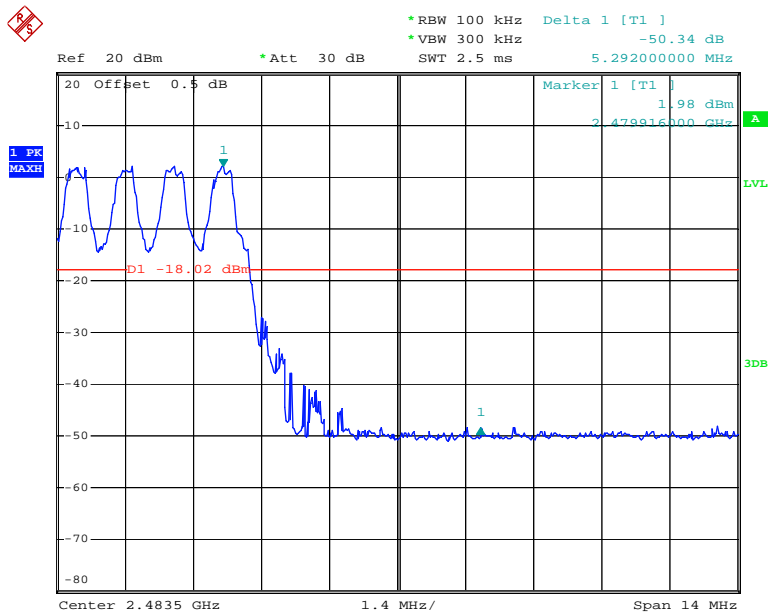

Date: 27.JUN.2018 22:15:27


EDR Mode ( $\pi/4$ -DQPSK):

### Band Edge, Left Side

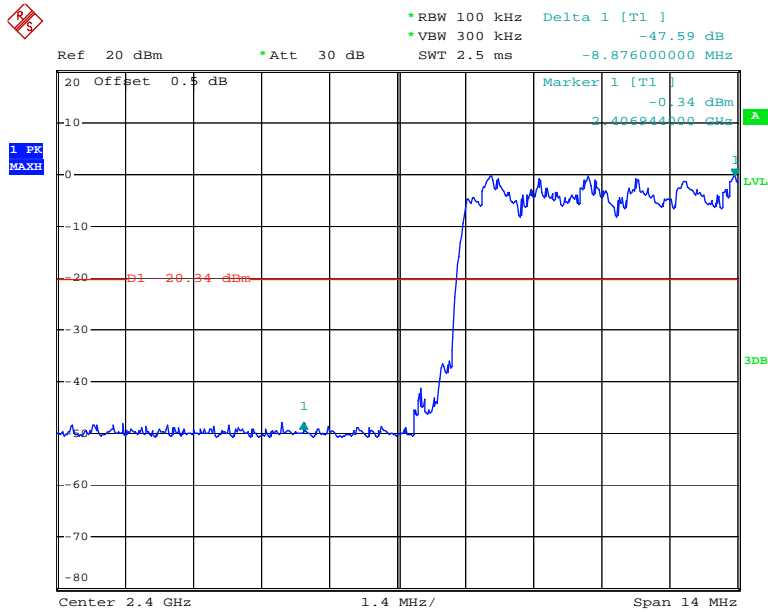

Date: 27.JUN.2018 22:18:13


### Band Edge, Right Side

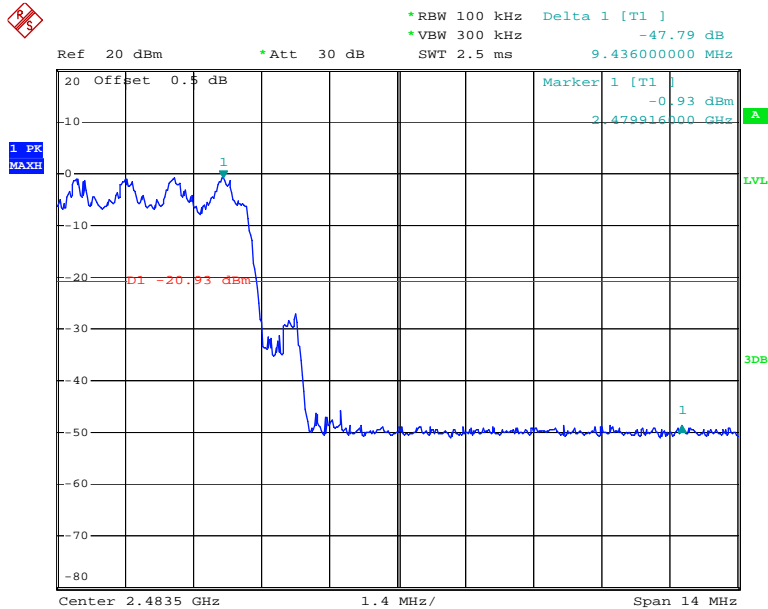

Date: 27.JUN.2018 22:21:09


EDR Mode (8-DPSK):

### Band Edge, Left Side

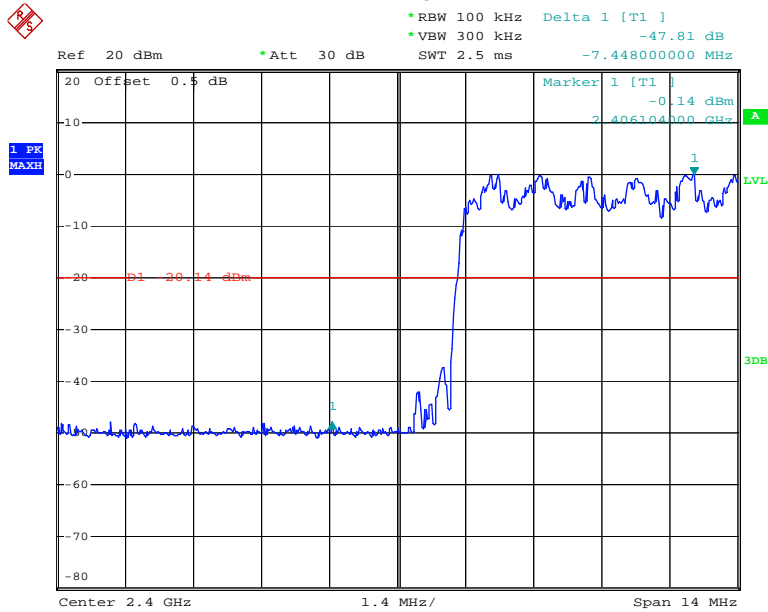

Date: 27.JUN.2018 22:23:46

### Band Edge, Right Side

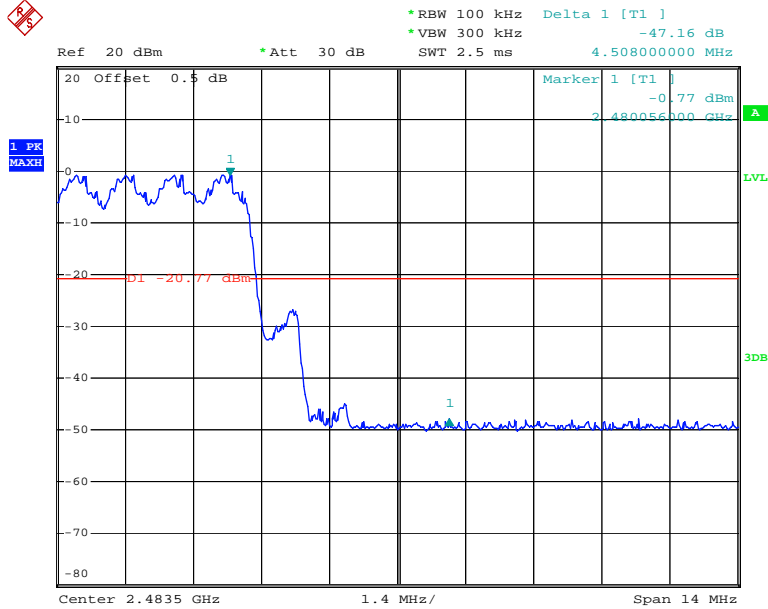

Date: 27.JUN.2018 22:34:45

\*\*\*\*\* END OF REPORT \*\*\*\*\*