



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247

TEST REPORT

For

AKUVOX (XIAMEN) NETWORKS CO., LTD.

10/F, No.56, Software Park II , Xiamen, China

FCC ID:2AHCR-IT83X

Report Type: Original Report	Product Name: Indoor Monitor
Report Number: RXM190124053-00C	
Report Date: 2019-06-10	
Reviewed By:	Dean Lau RF Supervisor <i>Dean Lau</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	10
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	10
SUPPORT CABLE LIST AND DETAILS	10
BLOCK DIAGRAM OF TEST SETUP	11
SUMMARY OF TEST RESULTS	13
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	14
APPLICABLE STANDARD	14
FCC §15.203 - ANTENNA REQUIREMENT.....	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST DATA	18
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	23
APPLICABLE STANDARD	23
EUT SETUP	23
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	24
TEST PROCEDURE	24
CORRECTED AMPLITUDE & MARGIN CALCULATION	24
TEST EQUIPMENT LIST AND DETAILS.....	25
TEST DATA	25
FCC §15.247(a) (2)–EMISSION BANDWIDTH TEST	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST EQUIPMENT LIST AND DETAILS.....	36
TEST DATA	36
FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	44
APPLICABLE STANDARD	44
TEST PROCEDURE	44
TEST EQUIPMENT LIST AND DETAILS.....	44

TEST DATA	44
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	46
APPLICABLE STANDARD	46
TEST PROCEDURE	46
TEST EQUIPMENT LIST AND DETAILS.....	46
TEST DATA	47
FCC §15.247(e) - POWER SPECTRAL DENSITY	52
APPLICABLE STANDARD	52
TEST PROCEDURE	52
TEST EQUIPMENT LIST AND DETAILS.....	52
TEST DATA	52

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	Indoor Monitor
EUT Model:	IT83AR
Multiple Models:	IT83W,IT83A
Operation Frequency:	2412-2462 MHz(802.11b/g/n ht20) 2402-2480 MHz(BLE)
Maximum Peak Output Power (Conducted):	23.97 dBm(802.11b/g/n ht20) 6.97dBm (BLE)
Modulation Type:	DSSS, OFDM(802.11b/g/n ht20)) GFSK(BLE)
Rated Input Voltage:	DC12V from DC port or DC48V from POE port
External Dimension:	251mm(L)* 182.5mm(W)*23mm(H)
Serial Number:	190124053
EUT Received Date:	2019.01.28

Notes: Model IT83AR was selected for fully testing, the detailed information about the difference among IT83W,IT83A and model IT83AR can be referred to the declaration letter which was stated and guaranteed by the manufacturer

Objective

This report is prepared on behalf of **AKUVOX (XIAMEN) NETWORKS CO., LTD.** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15C DSS submissions with FCC ID: 2AHCR-IT83X

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

For 2.4GHz band, total 11 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11n ht20 modes, test was performed with channel 1,6,11.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.

For Bluetooth LE mode, 40 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	...	...
...	...	...	...
...	...	...	...
..	...	38	2478
19	2440	39	2480

EUT was tested with channel 0, 19 and 39.

EUT Exercise Software

The DOS command was used for testing, which was provided by manufacturer. The maximum power was configured as below table, that provided by the manufacturer:


Mode	Channel	Frequency (MHz)	Data rate	Power level Setting
802.11b	Low	2412	1	15
	Middle	2437	1	15
	High	2462	1	15
802.11g	Low	2412	6	14
	Middle	2437	6	14
	High	2462	6	14
802.11n ht20	Low	2412	MCS0	13
	Middle	2437	MCS0	13
	High	2462	MCS0	13

Bluetooth LE mode was configured by the system default setting


The maximum duty cycle as following table:

Test mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
802.11b	100	100	100
802.11g	1.443	1.515	95.25
802.11n ht20	1.335	1.407	94.88
BLE	0.378	0.624	60.58


802.11b

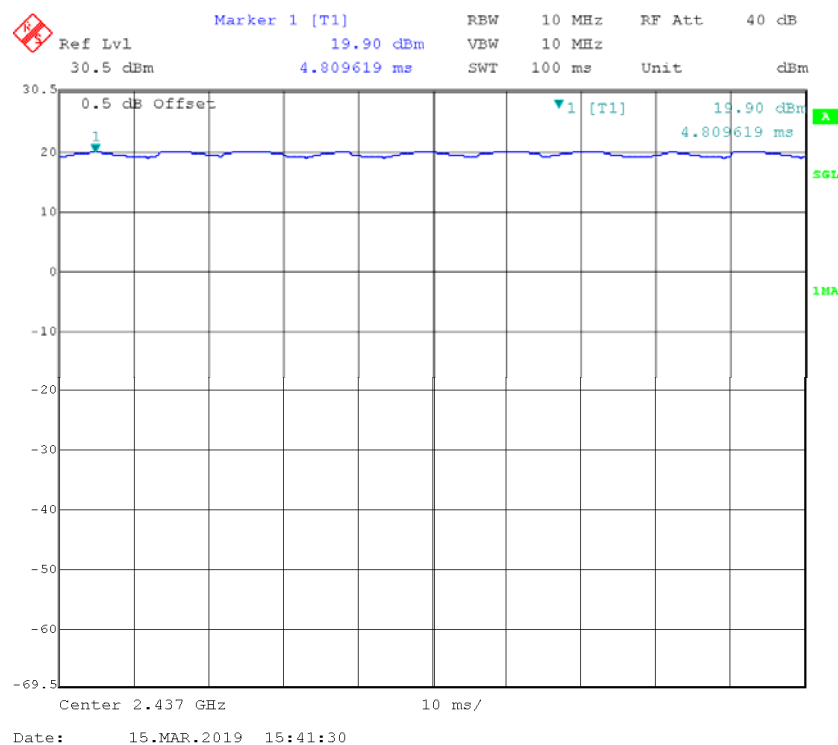


802.11g

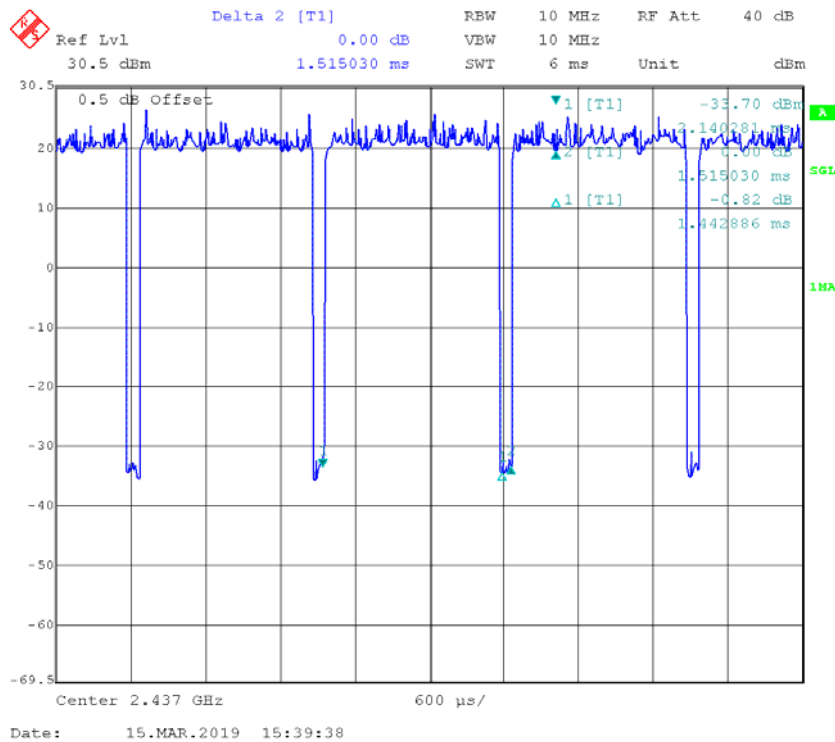

802.11n ht20

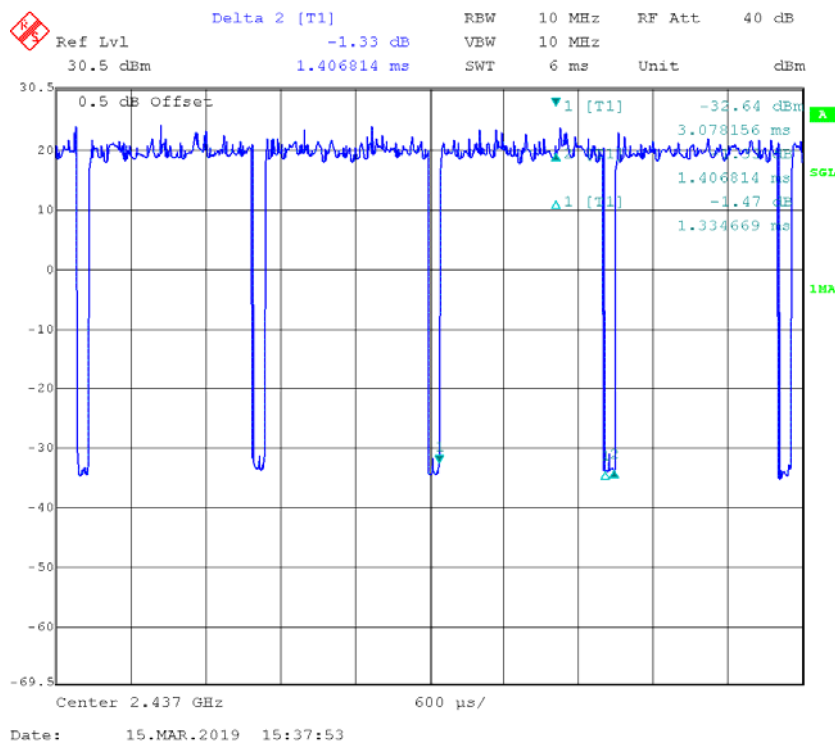

BLE

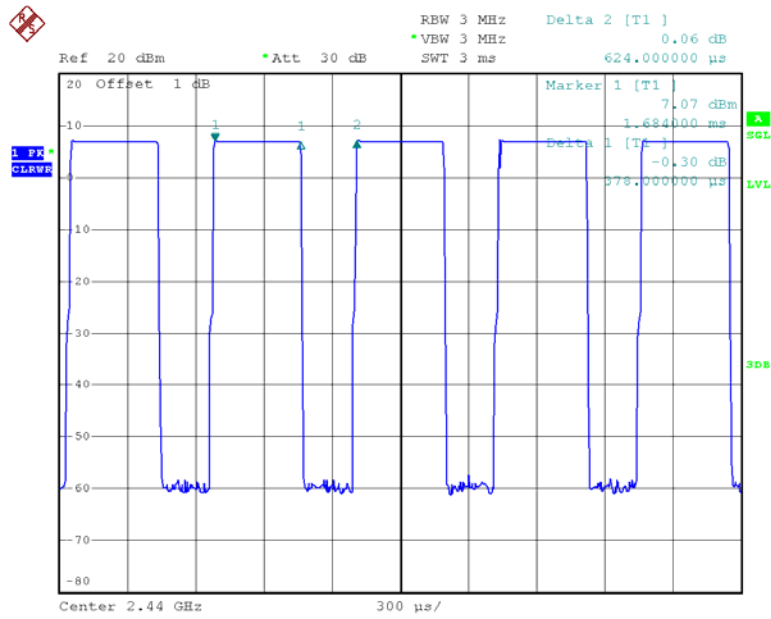

Date: 10.JUN.2019 11:12:56

Equipment Modifications

No modification was made to the EUT.

Local Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Channel Well Technology	Adapter	2ABB018F EU	N/A
HUAWEI	SWITCHING POWER ADAPTER	PoE35-54A	N/A
SIEMENS	Bell	5TD0102-1CC1	N/A
SALENS	Infrared sensor	RE200B	N/A
Schneider	Relay	RXM2LB2BD	N/A
AKUVOX	Doorbell	E10R	P1M40WMJ00299
TP-LINK	Switch	TL-SF1008P	114A297001782
xinsheng	Resistance	BX8-13	N/A
URSALINK	Router	UR75	621273906928

Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From	To
RJ45 Cable	No	No	5	RJ45 Port of EUT	Doorbell
Signal Cable*8	No	No	5	IO Port of EUT	Infrared sensor
Signal Cable	No	No	5	BELL Port of EUT	Bell
Signal Cable	No	No	5	RS485 Port of EUT	Switch
Signal Cable	No	No	5	Relay Port of EUT	Relay
Signal Cable	No	No	5	12V_OUT Port of EUT	Resistance
RJ45 Cable	No	No	5	POE Port of EUT	Router
Adapter Cable	No	No	1.3	Adapter	EUT
RJ45 Cable	No	No	1	POE Port of EUT	SWITCHING POWER ADAPTER

Block Diagram of Test Setup

POE supply

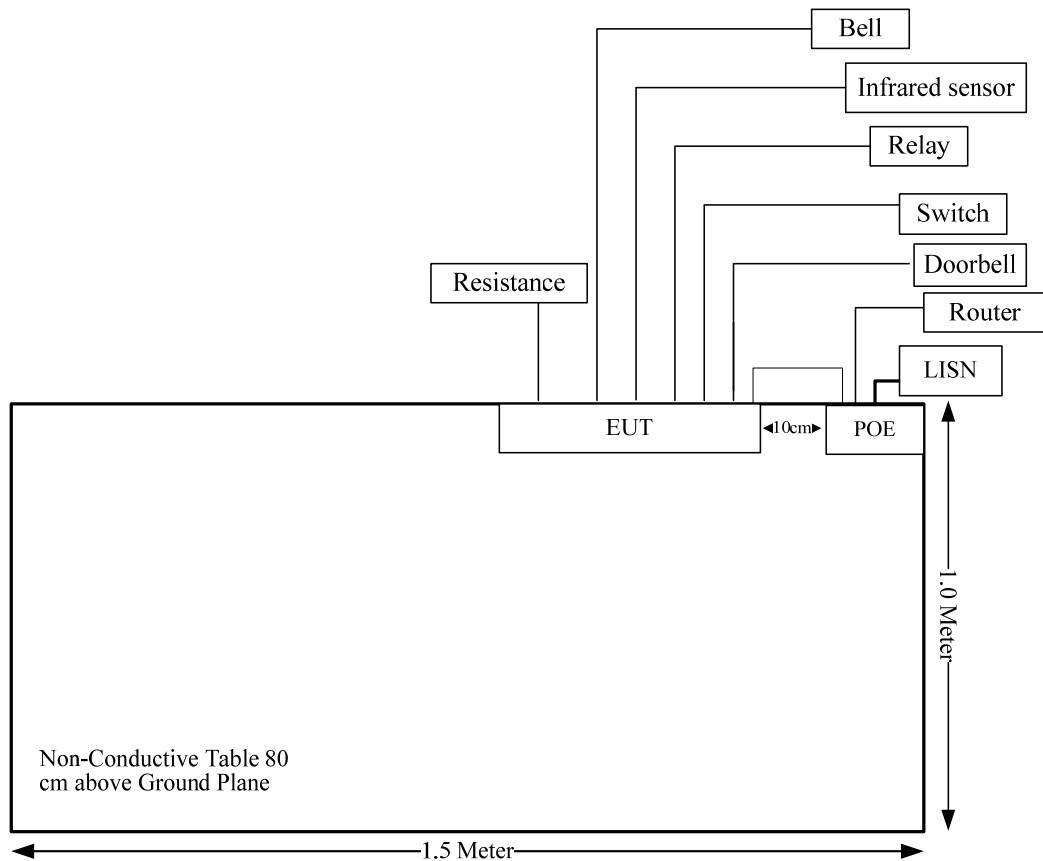

Adapter supply

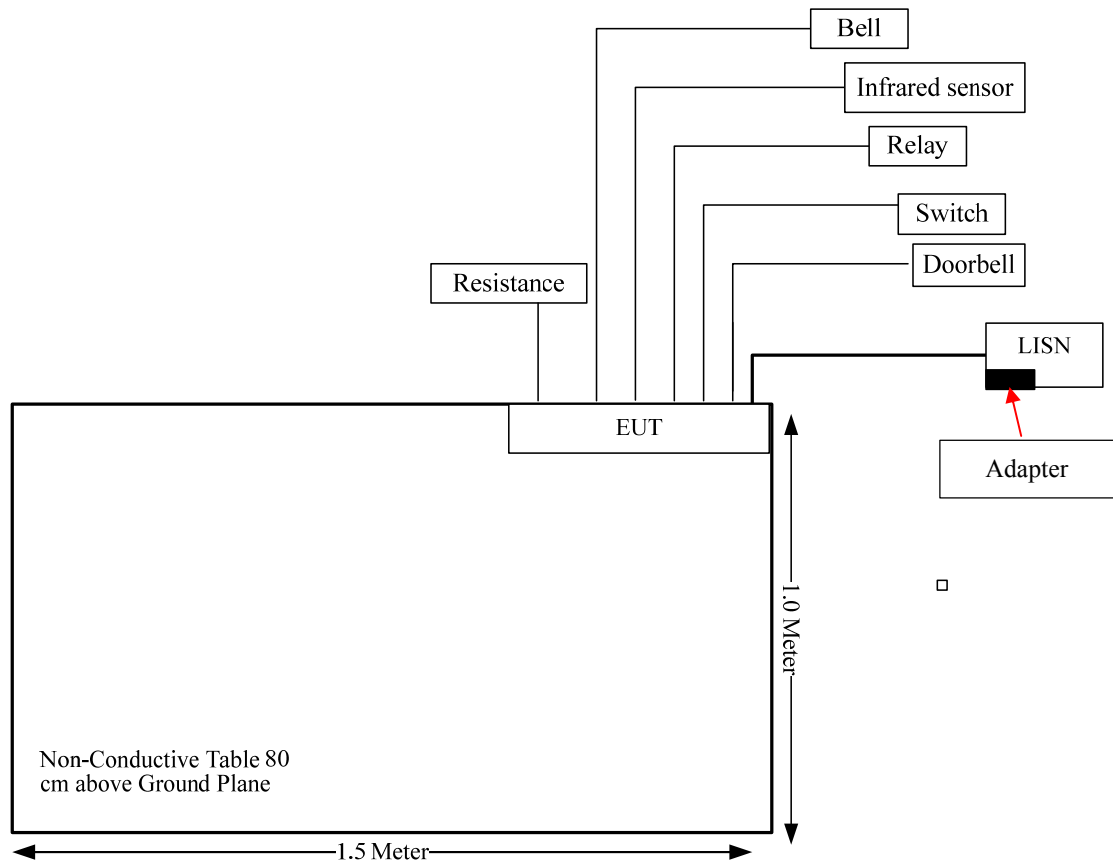

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
FCC §15.203	Antenna Requirement	Compliance
FCC §15.207 (a)	AC Line Conducted Emissions	Compliance
FCC §15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
FCC §15.247 (a)(2)	6 dB Bandwidth and 99% Occupied Bandwidth	Compliance
FCC §15.247(b)(3);	Maximum Conducted Output Power	Compliance
FCC §15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
FCC §15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
Wi-Fi	2412-2462	1.2	1.32	24	251.19	20	0.0659	1.0
Bluetooth LE	2402-2480	1.2	1.32	7	5.01	20	0.0013	1.0
Bluetooth	2402-2480	1.2	1.32	7	5.01	20	0.0013	1.0

Note: All modes can't transmit simultaneously.

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has one internal FPC antenna arrangement for BT/WLAN, fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
FPC	50	1.2 dBi/2.4~2.5GHz


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a).

EUT Setup

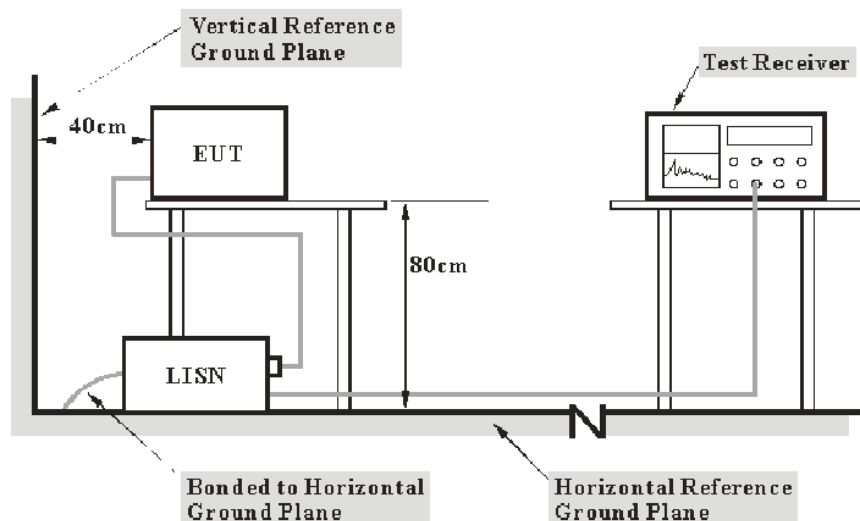

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisn with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2018-12-10	2019-12-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2018-09-05	2019-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2018-12-10	2019-12-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	22.8 °C
Relative Humidity:	59 %
ATM Pressure:	100.4 kPa


The testing was performed by Ade Xiao on 2019-02-18

Pre-scan all models, IT83AR was the worst case

Test Mode: Transmitting (802.11b low channel was the worst case)


POE supply

AC120 V, 60 Hz, Line:

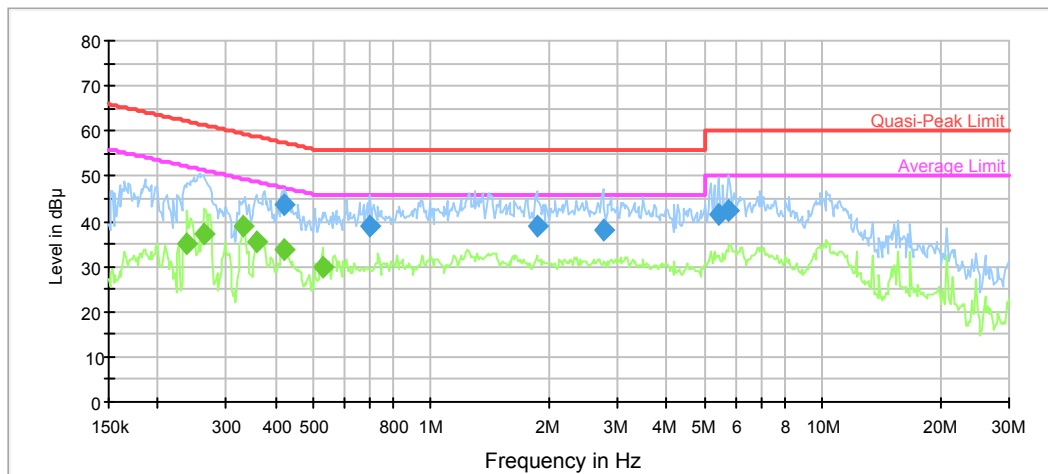

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.422630	43.9	9.000	L1	9.9	13.5	57.4
0.698191	38.8	9.000	L1	9.8	17.2	56.0
1.860457	38.9	9.000	L1	9.7	17.1	56.0
2.749070	38.1	9.000	L1	9.8	17.9	56.0
5.411666	41.7	9.000	L1	9.8	18.3	60.0
5.722091	42.4	9.000	L1	9.8	17.6	60.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.238124	35.2	9.000	L1	10.4	17.0	52.2
0.264113	37.2	9.000	L1	10.3	14.1	51.3
0.330129	38.7	9.000	L1	10.1	10.7	49.4
0.360371	35.2	9.000	L1	10.0	13.5	48.7
0.419276	33.9	9.000	L1	9.9	13.6	47.5
0.528270	29.9	9.000	L1	9.9	16.1	46.0

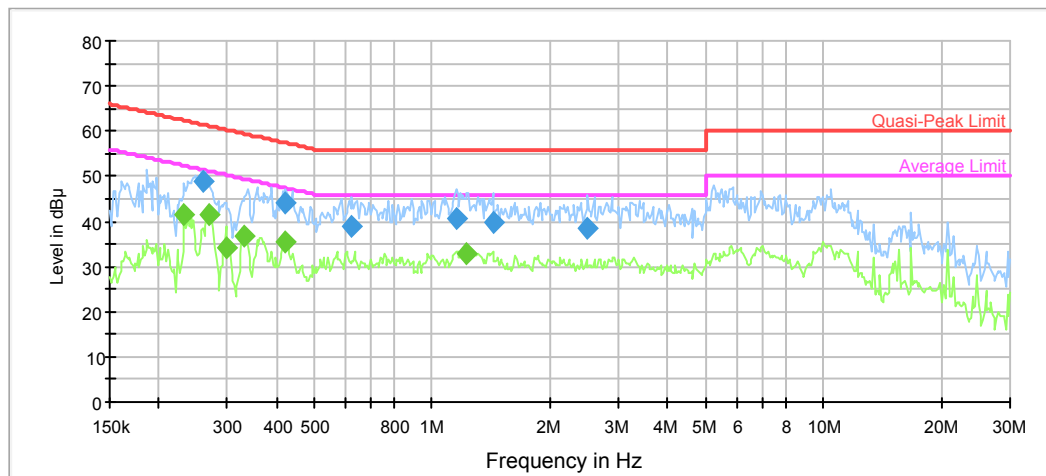
AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.259937	48.8	9.000	N	10.3	12.6	61.4
0.422630	44.3	9.000	N	9.9	13.1	57.4
0.624492	39.0	9.000	N	9.8	17.0	56.0
1.153421	40.8	9.000	N	9.8	15.2	56.0
1.430284	39.8	9.000	N	9.8	16.2	56.0
2.498385	38.6	9.000	N	9.8	17.4	56.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.232499	41.7	9.000	N	10.4	10.7	52.4
0.270502	41.4	9.000	N	10.2	9.7	51.1
0.297644	34.4	9.000	N	10.1	15.9	50.3
0.332770	36.7	9.000	N	10.1	12.7	49.4
0.422630	35.3	9.000	N	9.9	12.1	47.4
1.229340	32.8	9.000	N	9.8	13.2	46.0


Mode: Adapter supply

AC120 V, 60 Hz, Line:

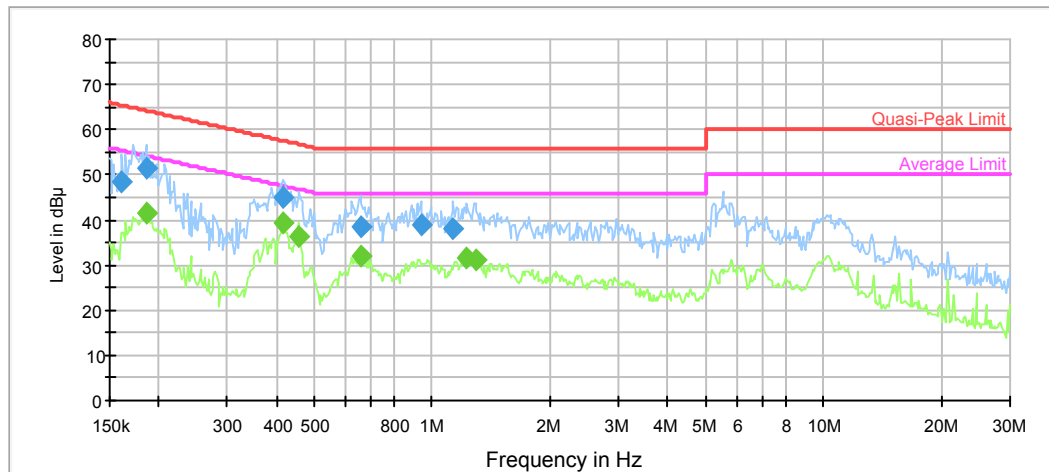

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.161152	48.4	9.000	L1	11.0	17.0	65.4
0.186006	51.6	9.000	L1	10.7	12.6	64.2
0.415949	44.8	9.000	L1	9.9	12.7	57.5
0.655073	38.5	9.000	L1	9.8	17.5	56.0
0.937592	38.7	9.000	L1	9.8	17.3	56.0
1.135185	38.0	9.000	L1	9.8	18.0	56.0

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.186006	41.4	9.000	L1	10.7	12.8	54.2
0.415949	39.4	9.000	L1	9.9	8.1	47.5
0.454052	36.2	9.000	L1	9.9	10.6	46.8
0.655073	32.1	9.000	L1	9.8	13.9	46.0
1.229340	31.4	9.000	L1	9.8	14.6	46.0
1.289541	31.3	9.000	L1	9.8	14.7	46.0

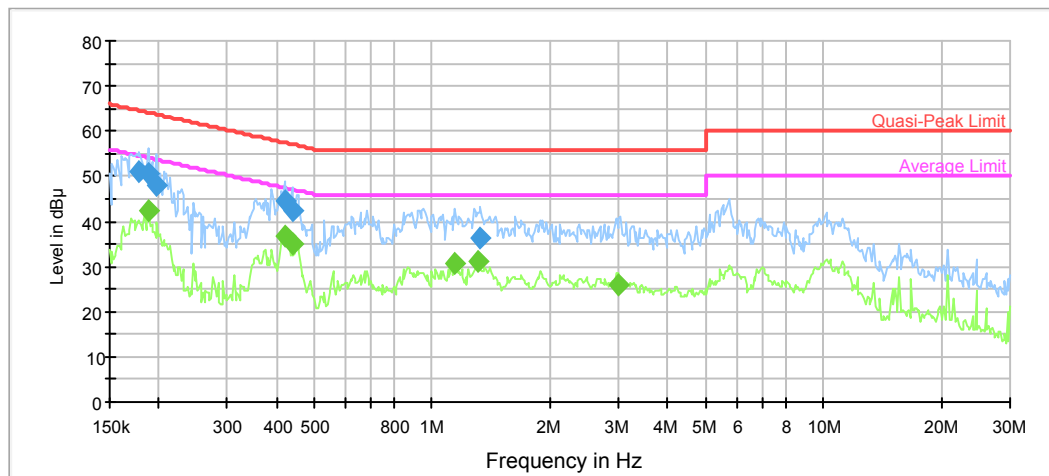AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.178741	50.9	9.000	N	10.8	13.6	64.5
0.188994	50.5	9.000	N	10.7	13.6	64.1
0.198249	47.8	9.000	N	10.6	15.9	63.7
0.419276	44.4	9.000	N	9.9	13.1	57.5
0.439808	42.2	9.000	N	9.9	14.9	57.1
1.331304	36.5	9.000	N	9.8	19.5	56.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.188994	42.4	9.000	N	10.7	11.7	54.1
0.419276	36.6	9.000	N	9.9	10.9	47.5
0.439808	35.1	9.000	N	9.9	12.0	47.1
1.144267	30.9	9.000	N	9.8	15.1	46.0
1.310256	31.1	9.000	N	9.8	14.9	46.0
2.977084	26.1	9.000	N	9.8	19.9	46.0


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205.

EUT Setup

Below 1GHz:

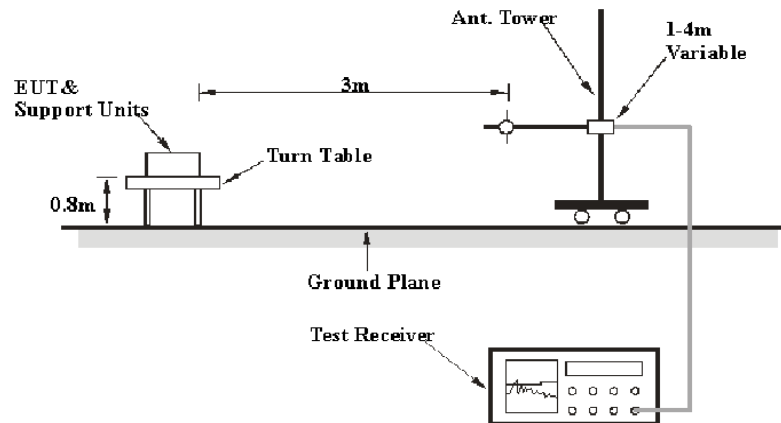

Above 1GHz:

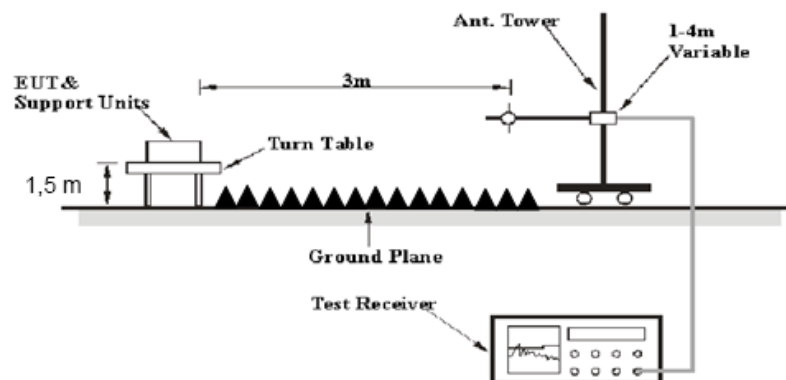

The radiated emission Below 1GHz tests were performed in the 3 meters chamber test site A, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2018-12-10	2019-12-10
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2018-05-06	2019-05-06
HP	Amplifier	8447D	2727A05902	2018-09-05	2019-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-01-04	2020-01-04
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2018-06-27	2019-06-27
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2018-09-05	2019-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2018-06-27	2019-06-27
E-Microwave	Band-stop Filters	OBSF-2400-2483.5-S	OE01601525	2018-06-16	2019-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data**Environmental Conditions**

Temperature:	25.6~26.3 °C
Relative Humidity:	54~63%
ATM Pressure:	100.3~ 100.6kPa


* The testing was performed by Tylar Pan , Vern Shen on 2019-02-13& 2019-03-10

Test Result: Compliance, please Refer to the following data

Test Mode: Transmitting

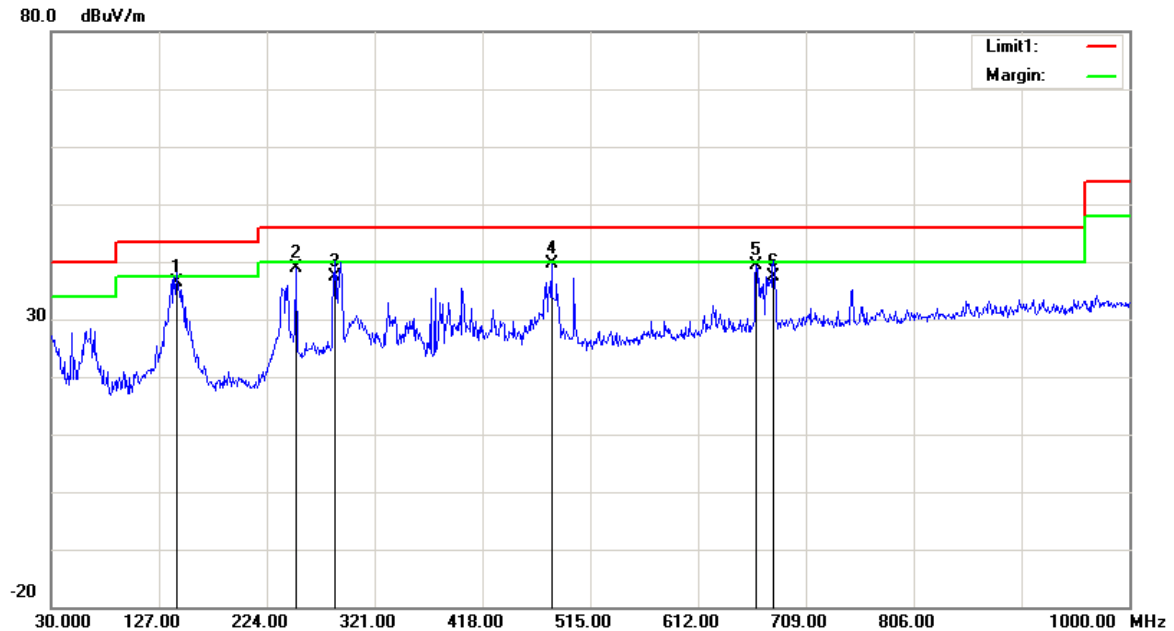
1) 30MHz-1GHz(802.11b_low channel was the worst)**Mode : POE supply****Horizontal:**

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
142.5200	42.31	QP	-5.91	36.40	43.50	7.10
250.1900	44.85	peak	-6.03	38.82	46.00	7.18
285.1100	41.53	QP	-4.03	37.50	46.00	8.50
480.0800	39.90	peak	-0.27	39.63	46.00	6.37
664.3800	37.21	peak	2.23	39.44	46.00	6.56
679.9000	34.84	QP	2.66	37.50	46.00	8.50

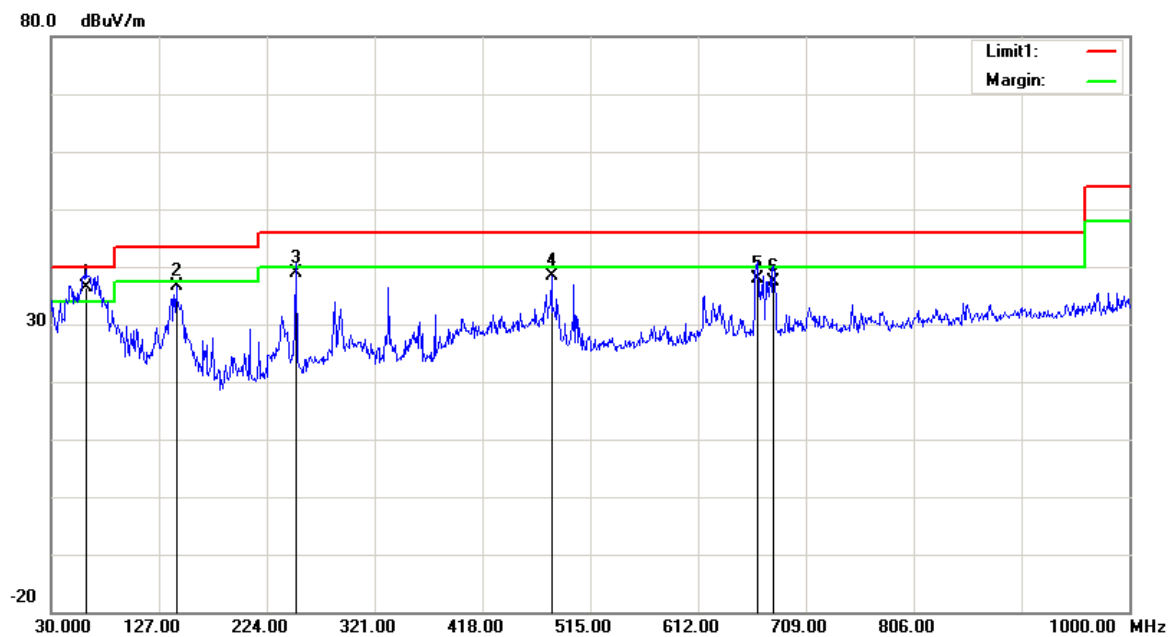
Vertical:

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
61.0400	48.56	QP	-12.06	36.50	40.00	3.50
142.5200	42.54	peak	-5.91	36.63	43.50	6.87
250.1900	44.83	QP	-6.03	38.80	46.00	7.20
480.0800	38.77	peak	-0.27	38.50	46.00	7.50
665.3500	35.65	QP	2.25	37.90	46.00	8.10
679.9000	34.84	QP	2.66	37.50	46.00	8.50

Mode : Adapter supply
Horizontal:

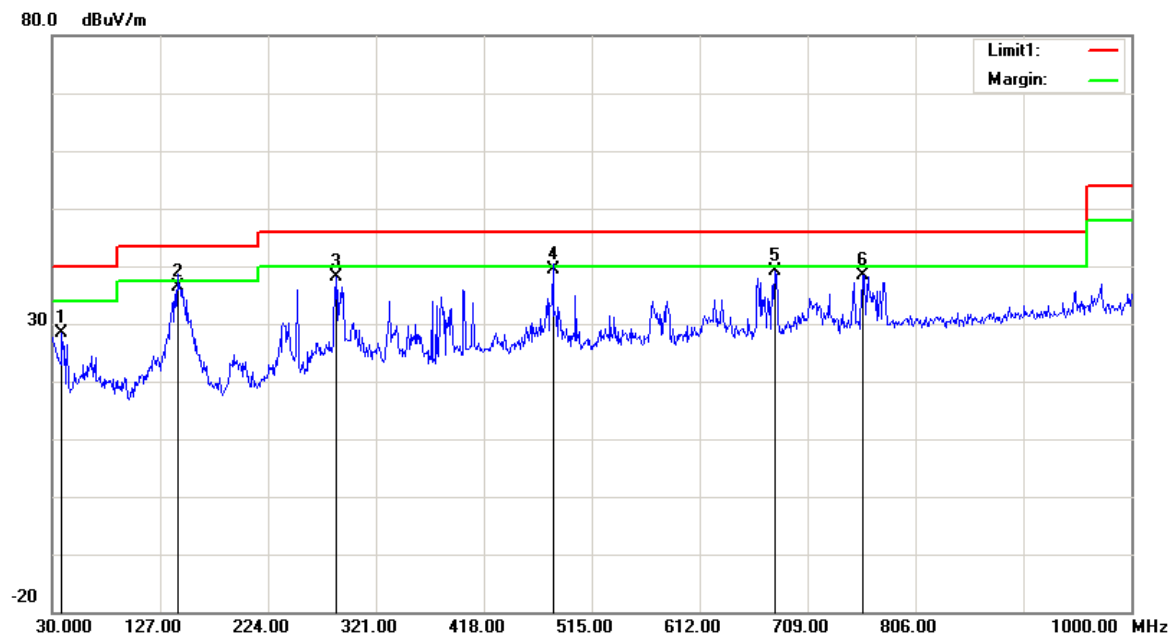

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
38.7300	33.25	peak	-4.95	28.30	40.00	11.70
142.5200	42.31	QP	-5.91	36.40	43.50	7.10
285.1100	42.25	peak	-4.03	38.22	46.00	7.78
480.0800	39.77	QP	-0.27	39.50	46.00	6.50
679.9000	36.48	peak	2.66	39.14	46.00	6.86
758.4700	34.43	peak	3.92	38.35	46.00	7.65

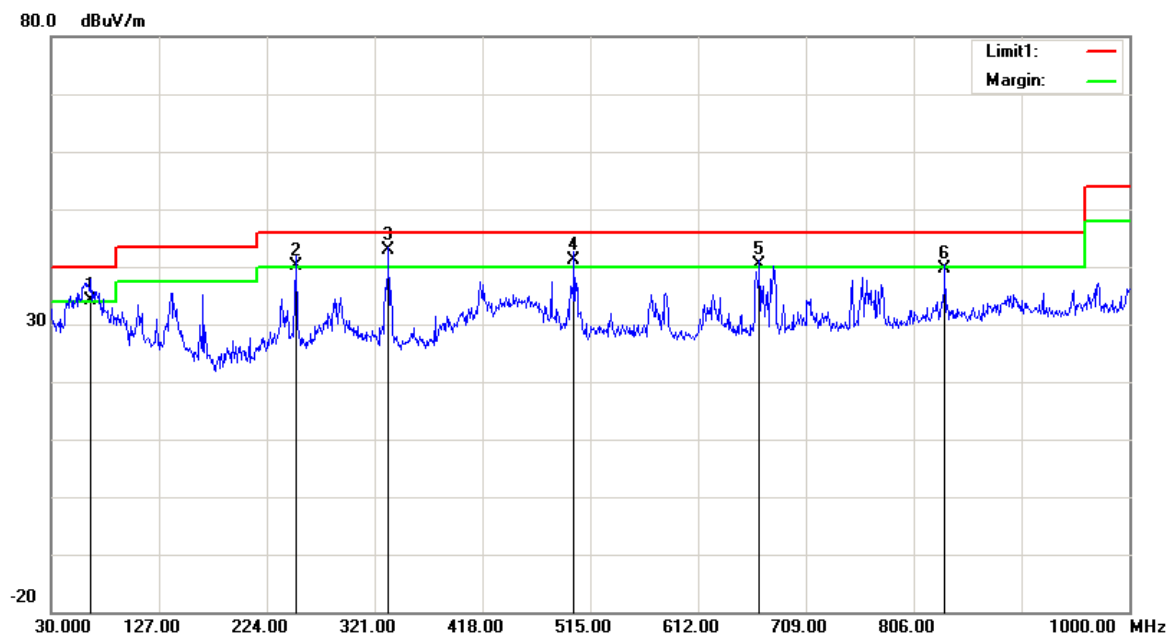Vertical:

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
65.8900	45.80	QP	-11.60	34.20	40.00	5.80
250.1900	46.23	QP	-6.03	40.20	46.00	5.80
333.6100	46.35	QP	-3.35	43.00	46.00	3.00
500.4500	41.52	QP	-0.32	41.20	46.00	4.80
667.2900	38.11	QP	2.29	40.40	46.00	5.60
834.1300	34.57	QP	5.03	39.60	46.00	6.40

**2) 1-25GHz:
802.11b Mode:**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	70.76	PK	H	24.84	3.35	0.00	98.95	N/A	N/A
2412.00	66.43	AV	H	24.84	3.35	0.00	94.62	N/A	N/A
2412.00	64.50	PK	V	24.84	3.35	0.00	92.69	N/A	N/A
2412.00	60.37	AV	V	24.84	3.35	0.00	88.56	N/A	N/A
2390.00	25.96	PK	H	24.80	3.33	0.00	54.09	74.00	19.91
2390.00	12.99	AV	H	24.80	3.33	0.00	41.12	54.00	12.88
4824.00	37.48	PK	H	29.75	4.58	27.41	44.40	74.00	29.60
4824.00	24.62	AV	H	29.75	4.58	27.41	31.54	54.00	22.46
7236.00	39.61	PK	H	33.98	5.62	27.22	51.99	74.00	22.01
7236.00	26.45	AV	H	33.98	5.62	27.22	38.83	54.00	15.17
Middle Channel: 2437 MHz									
2437.00	70.49	PK	H	24.89	3.36	0.00	98.74	N/A	N/A
2437.00	66.19	AV	H	24.89	3.36	0.00	94.44	N/A	N/A
2437.00	64.33	PK	V	24.89	3.36	0.00	92.58	N/A	N/A
2437.00	59.87	AV	V	24.89	3.36	0.00	88.12	N/A	N/A
4874.00	36.95	PK	H	29.85	4.57	27.54	43.83	74.00	30.17
4874.00	23.44	AV	H	29.85	4.57	27.54	30.32	54.00	23.68
7311.00	38.99	PK	H	34.10	5.68	27.28	51.49	74.00	22.51
7311.00	25.25	AV	H	34.10	5.68	27.28	37.75	54.00	16.25
High Channel: 2462 MHz									
2462.00	70.58	PK	H	24.93	3.37	0.00	98.88	N/A	N/A
2462.00	66.26	AV	H	24.93	3.37	0.00	94.56	N/A	N/A
2462.00	64.73	PK	V	24.93	3.37	0.00	93.03	N/A	N/A
2462.00	60.36	AV	V	24.93	3.37	0.00	88.66	N/A	N/A
2483.50	24.84	PK	H	24.97	3.38	0.00	53.19	74.00	20.81
2483.50	13.14	AV	H	24.97	3.38	0.00	41.49	54.00	12.51
4924.00	37.47	PK	H	29.95	4.57	27.51	44.48	74.00	29.52
4924.00	24.05	AV	H	29.95	4.57	27.51	31.06	54.00	22.94
7386.00	36.01	PK	H	34.22	5.74	27.18	48.79	74.00	25.21
7386.00	23.33	AV	H	34.22	5.74	27.18	36.11	54.00	17.89

802.11g Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	73.64	PK	H	24.84	3.35	0.00	101.83	N/A	N/A
2412.00	62.27	AV	H	24.84	3.35	0.00	90.46	N/A	N/A
2412.00	67.52	PK	V	24.84	3.35	0.00	95.71	N/A	N/A
2412.00	55.98	AV	V	24.84	3.35	0.00	84.17	N/A	N/A
2390.00	33.45	PK	H	24.80	3.33	0.00	61.58	74.00	12.42
2390.00	17.26	AV	H	24.80	3.33	0.00	45.39	54.00	8.61
4824.00	37.47	PK	H	29.75	4.58	27.41	44.39	74.00	29.61
4824.00	24.26	AV	H	29.75	4.58	27.41	31.18	54.00	22.82
7236.00	38.65	PK	H	33.98	5.62	27.22	51.03	74.00	22.97
7236.00	25.06	AV	H	33.98	5.62	27.22	37.44	54.00	16.56
Middle Channel: 2437 MHz									
2437.00	73.24	PK	H	24.89	3.36	0.00	101.49	N/A	N/A
2437.00	62.72	AV	H	24.89	3.36	0.00	90.97	N/A	N/A
2437.00	66.47	PK	V	24.89	3.36	0.00	94.72	N/A	N/A
2437.00	55.93	AV	V	24.89	3.36	0.00	84.18	N/A	N/A
4874.00	37.46	PK	H	29.85	4.57	27.54	44.34	74.00	29.66
4874.00	24.93	AV	H	29.85	4.57	27.54	31.81	54.00	22.19
7311.00	38.87	PK	H	34.10	5.68	27.28	51.37	74.00	22.63
7311.00	25.99	AV	H	34.10	5.68	27.28	38.49	54.00	15.51
High Channel: 2462 MHz									
2462.00	73.28	PK	H	24.93	3.37	0.00	101.58	N/A	N/A
2462.00	62.19	AV	H	24.93	3.37	0.00	90.49	N/A	N/A
2462.00	67.59	PK	V	24.93	3.37	0.00	95.89	N/A	N/A
2462.00	57.40	AV	V	24.93	3.37	0.00	85.70	N/A	N/A
2483.50	33.47	PK	H	24.97	3.38	0.00	61.82	74.00	12.18
2483.50	15.02	AV	H	24.97	3.38	0.00	43.37	54.00	10.63
4924.00	37.89	PK	H	29.95	4.57	27.51	44.90	74.00	29.10
4924.00	24.51	AV	H	29.95	4.57	27.51	31.52	54.00	22.48
7386.00	38.66	PK	H	34.22	5.74	27.18	51.44	74.00	22.56
7386.00	25.46	AV	H	34.22	5.74	27.18	38.24	54.00	15.76




802.11n ht20 Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	72.98	PK	H	24.84	3.35	0.00	101.17	N/A	N/A
2412.00	61.65	AV	H	24.84	3.35	0.00	89.84	N/A	N/A
2412.00	65.93	PK	V	24.84	3.35	0.00	94.12	N/A	N/A
2412.00	54.89	AV	V	24.84	3.35	0.00	83.08	N/A	N/A
2390.00	34.64	PK	H	24.80	3.33	0.00	62.77	74.00	11.23
2390.00	17.24	AV	H	24.80	3.33	0.00	45.37	54.00	8.63
4824.00	37.54	PK	H	29.75	4.58	27.41	44.46	74.00	29.54
4824.00	24.63	AV	H	29.75	4.58	27.41	31.55	54.00	22.45
7236.00	38.65	PK	H	33.98	5.62	27.22	51.03	74.00	22.97
7236.00	25.71	AV	H	33.98	5.62	27.22	38.09	54.00	15.91
Middle Channel: 2437 MHz									
2437.00	72.41	PK	H	24.89	3.36	0.00	100.66	N/A	N/A
2437.00	61.83	AV	H	24.89	3.36	0.00	90.08	N/A	N/A
2437.00	65.58	PK	V	24.89	3.36	0.00	93.83	N/A	N/A
2437.00	54.16	AV	V	24.89	3.36	0.00	82.41	N/A	N/A
4874.00	37.36	PK	H	29.85	4.57	27.54	44.24	74.00	29.76
4874.00	23.81	AV	H	29.85	4.57	27.54	30.69	54.00	23.31
7311.00	38.83	PK	H	34.10	5.68	27.28	51.33	74.00	22.67
7311.00	25.65	AV	H	34.10	5.68	27.28	38.15	54.00	15.85
High Channel: 2462 MHz									
2462.00	73.08	PK	H	24.93	3.37	0.00	101.38	N/A	N/A
2462.00	62.13	AV	H	24.93	3.37	0.00	90.43	N/A	N/A
2462.00	66.39	PK	V	24.93	3.37	0.00	94.69	N/A	N/A
2462.00	55.93	AV	V	24.93	3.37	0.00	84.23	N/A	N/A
2483.50	33.14	PK	H	24.97	3.38	0.00	61.49	74.00	12.51
2483.50	14.63	AV	H	24.97	3.38	0.00	42.98	54.00	11.02
4924.00	37.45	PK	H	29.95	4.57	27.51	44.46	74.00	29.54
4924.00	24.31	AV	H	29.95	4.57	27.51	31.32	54.00	22.68
7386.00	38.46	PK	H	34.22	5.74	27.18	51.24	74.00	22.76
7386.00	25.69	AV	H	34.22	5.74	27.18	38.47	54.00	15.53




BLE Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	67.84	PK	H	28.10	1.80	0.00	97.74	N/A	N/A
2402.00	63.37	AV	H	28.10	1.80	0.00	93.27	N/A	N/A
2402.00	59.10	PK	V	28.10	1.80	0.00	89.00	N/A	N/A
2402.00	54.57	AV	V	28.10	1.80	0.00	84.47	N/A	N/A
2390.00	25.32	PK	H	28.08	1.80	0.00	55.20	74.00	18.80
2390.00	13.26	AV	H	28.08	1.80	0.00	43.14	54.00	10.86
4804.00	50.06	PK	H	32.91	3.17	37.20	48.94	74.00	25.06
4804.00	37.51	AV	H	32.91	3.17	37.20	36.39	54.00	17.61
7206.00	45.96	PK	H	35.74	4.82	37.23	49.29	74.00	24.71
7206.00	33.54	AV	H	35.74	4.82	37.23	36.87	54.00	17.13
1165.00	50.06	PK	H	24.06	1.49	35.62	39.99	74.00	34.01
1165.00	37.51	AV	H	24.06	1.49	35.62	27.44	54.00	26.56
2542.00	65.38	PK	H	28.45	1.86	36.37	59.32	74.00	14.68
2542.00	49.22	AV	H	28.45	1.86	36.37	43.16	54.00	10.84
Middle Channel: 2440 MHz									
2440.00	67.44	PK	H	28.18	1.82	0.00	97.44	N/A	N/A
2440.00	62.97	AV	H	28.18	1.82	0.00	92.97	N/A	N/A
2440.00	59.18	PK	V	28.18	1.82	0.00	89.18	N/A	N/A
2440.00	54.69	AV	V	28.18	1.82	0.00	84.69	N/A	N/A
4880.00	49.40	PK	H	33.06	3.27	37.21	48.52	74.00	25.48
4880.00	36.88	AV	H	33.06	3.27	37.21	36.00	54.00	18.00
7320.00	45.74	PK	H	36.03	4.62	37.37	49.02	74.00	24.98
7320.00	33.21	AV	H	36.03	4.62	37.37	36.49	54.00	17.51
1440.00	56.37	PK	H	25.00	1.69	36.05	47.01	74.00	26.99
1440.00	42.58	AV	H	25.00	1.69	36.05	33.22	54.00	20.78
2542.00	57.07	PK	H	28.45	1.86	36.37	51.01	74.00	22.99
2542.00	41.66	AV	H	28.45	1.86	36.37	35.60	54.00	18.40
High Channel: 2480 MHz									
2480.00	67.29	PK	H	28.26	1.84	0.00	97.39	N/A	N/A
2480.00	62.78	AV	H	28.26	1.84	0.00	92.88	N/A	N/A
2480.00	59.30	PK	V	28.26	1.84	0.00	89.40	N/A	N/A
2480.00	54.70	AV	V	28.26	1.84	0.00	84.80	N/A	N/A
2483.50	27.47	PK	H	28.27	1.84	0.00	57.58	74.00	16.42
2483.50	14.21	AV	H	28.27	1.84	0.00	44.32	54.00	9.68
4960.00	49.35	PK	H	33.22	3.23	37.25	48.55	74.00	25.45
4960.00	36.74	AV	H	33.22	3.23	37.25	35.94	54.00	18.06
7440.00	46.10	PK	H	36.34	4.41	37.52	49.33	74.00	24.67
7440.00	33.65	AV	H	36.34	4.41	37.52	36.88	54.00	17.12
1197.50	57.63	PK	H	24.17	1.47	35.61	47.66	74.00	26.34
1197.50	43.26	AV	H	24.17	1.47	35.61	33.29	54.00	20.71
2542.00	54.56	PK	H	28.45	1.86	36.37	48.50	74.00	25.50
2542.00	38.69	AV	H	28.45	1.86	36.37	32.63	54.00	21.37

Test plots(802.11b_low channel was the worst)
Horizontal:

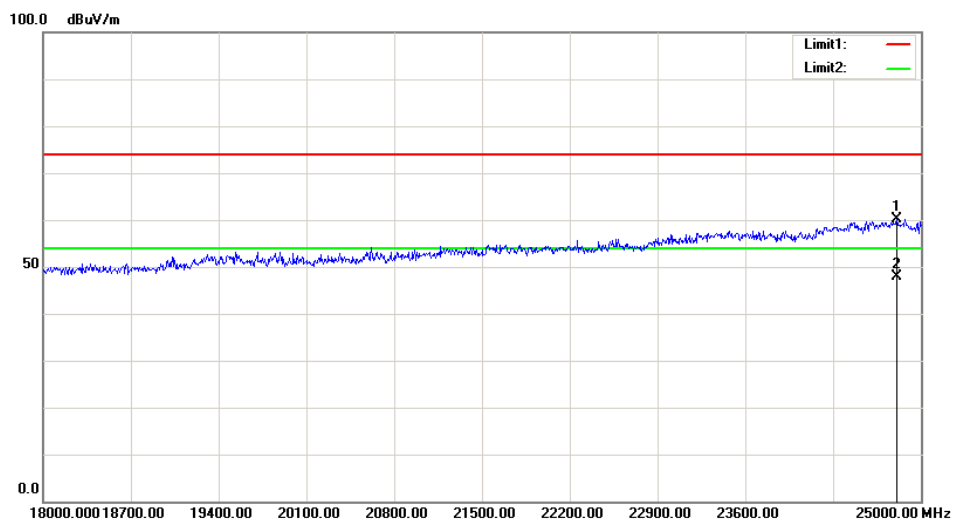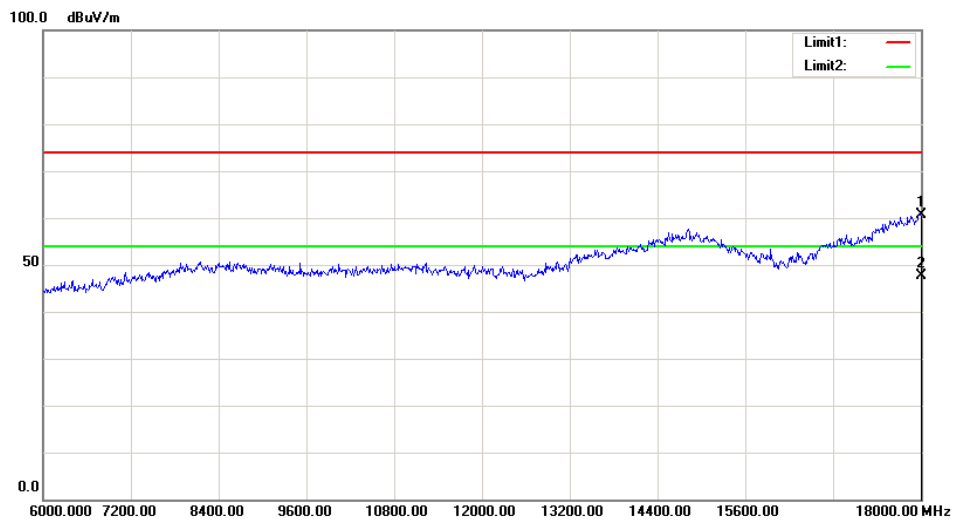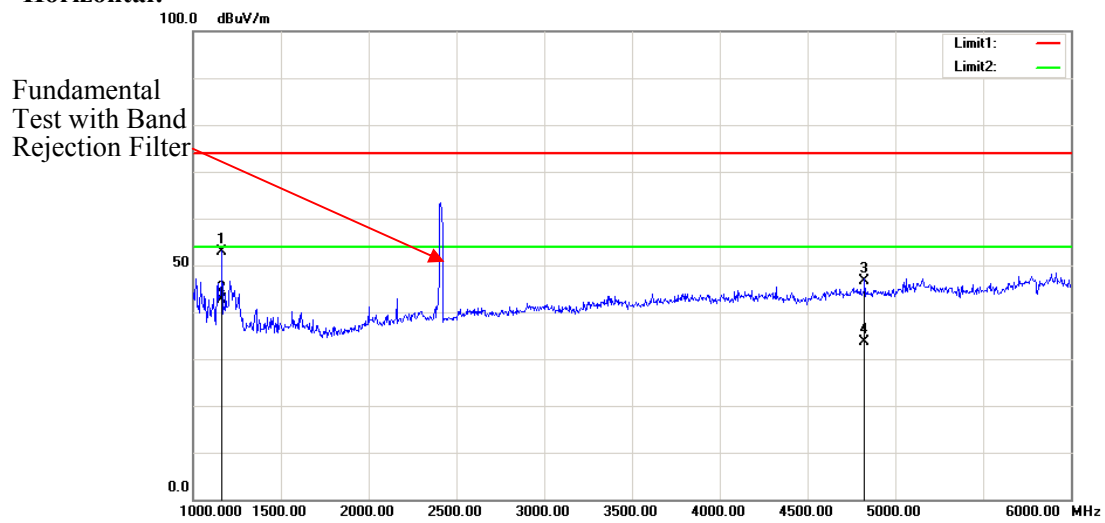

Vertical:

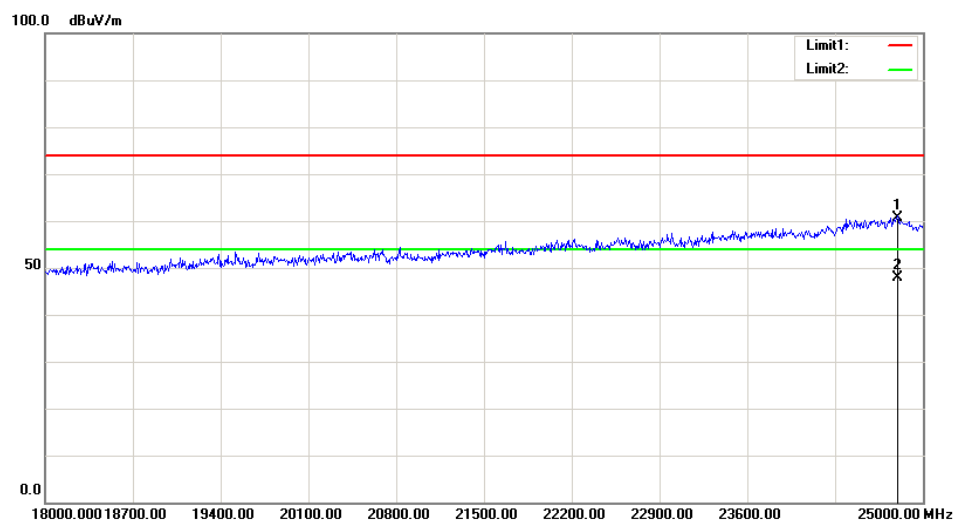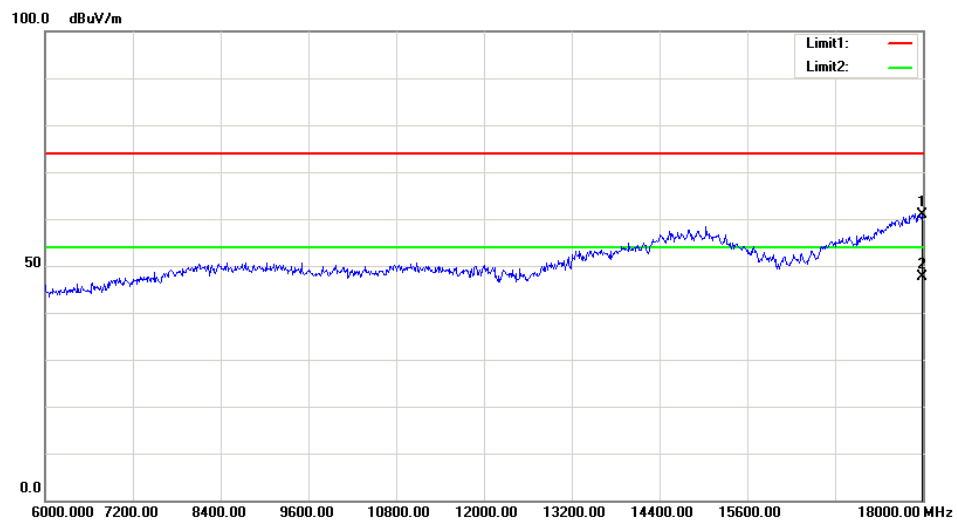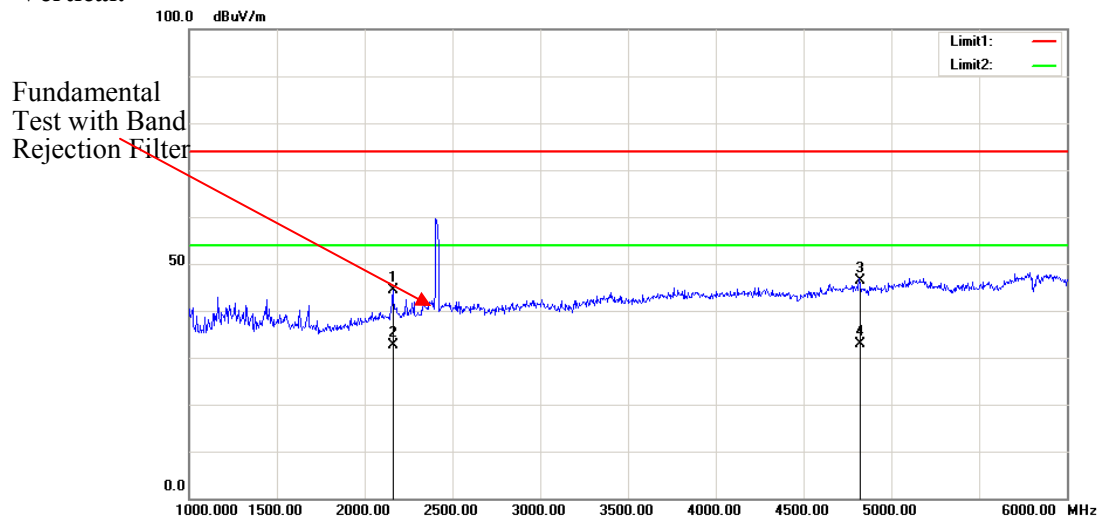

FCC §15.247(a) (2) – EMISSION BANDWIDTH TEST


Applicable Standard

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2018/8/3	2019/8/3
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	23.5~24.5 °C
Relative Humidity:	56~57%
ATM Pressure:	100.5~ 100.7kPa

* The testing was performed by Carrie He 2019-03-05 and 2019-03-15


Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.


Test mode	Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
802.11b	Low	2412	8.978	≥ 0.5
	Middle	2437	9.539	≥ 0.5
	High	2462	8.577	≥ 0.5
802.11g	Low	2412	15.311	≥ 0.5
	Middle	2437	15.230	≥ 0.5
	High	2462	15.311	≥ 0.5
802.11n ht20	Low	2412	15.230	≥ 0.5
	Middle	2437	15.230	≥ 0.5
	High	2462	15.311	≥ 0.5
BLE	Low	2402	0.716	≥ 0.5
	Middle	2440	0.708	≥ 0.5
	High	2480	0.712	≥ 0.5

6 dB Bandwidth:


802.11b Low Channel

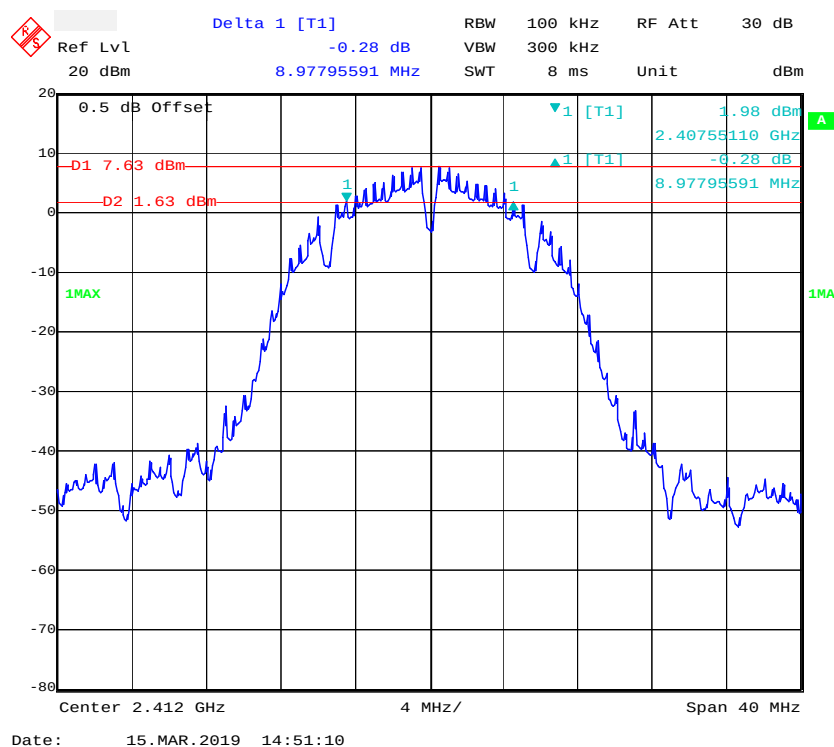


802.11b Middle Channel

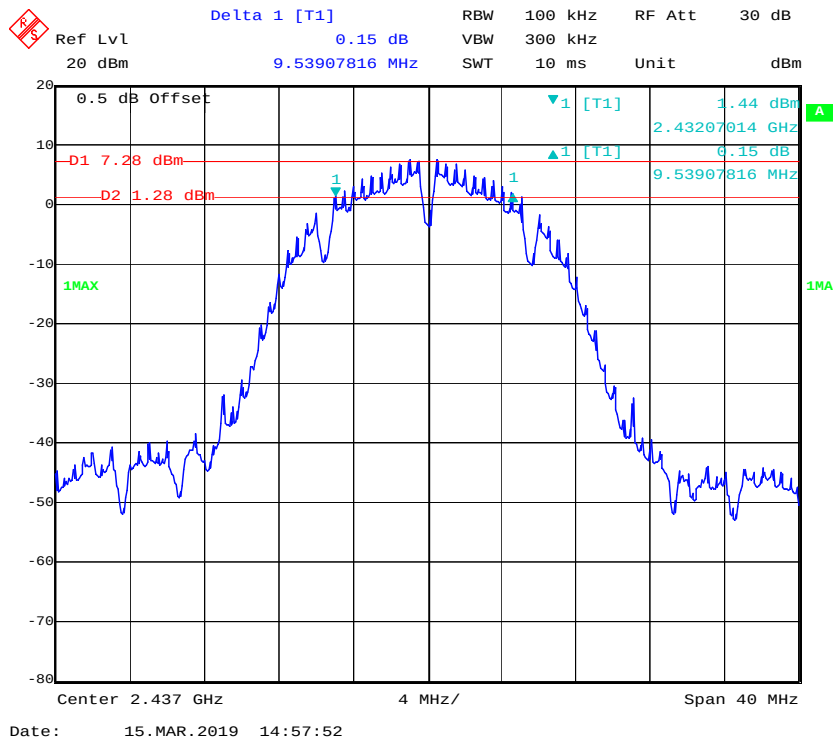


802.11b High Channel

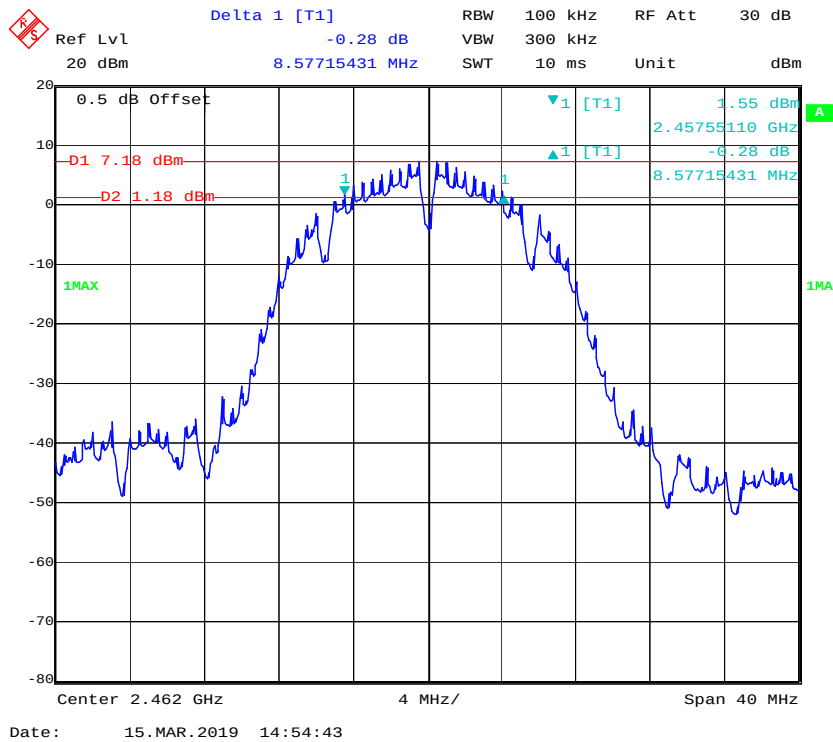


802.11g Low Channel

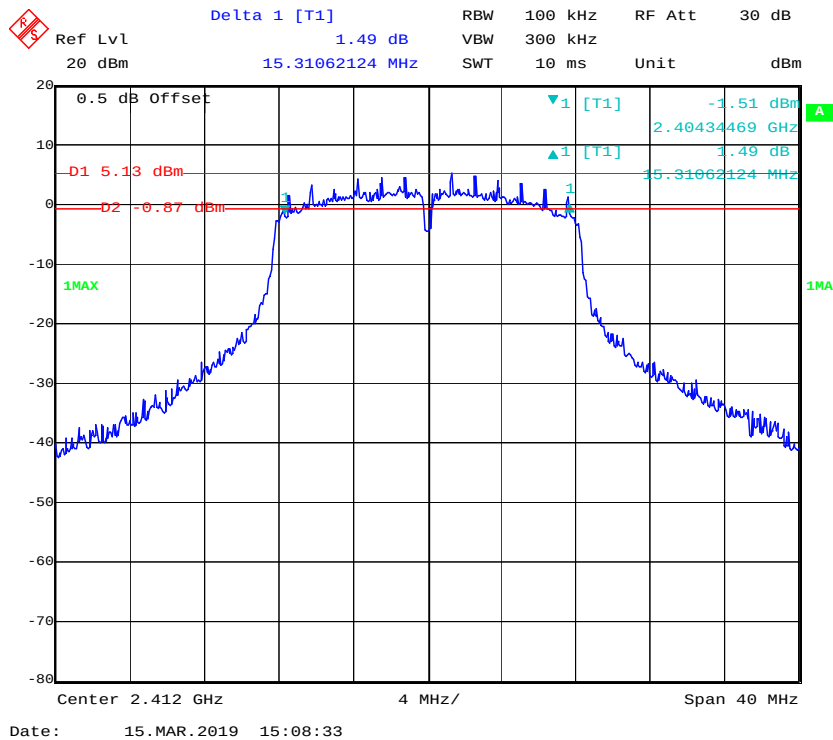

802.11g Middle Channel

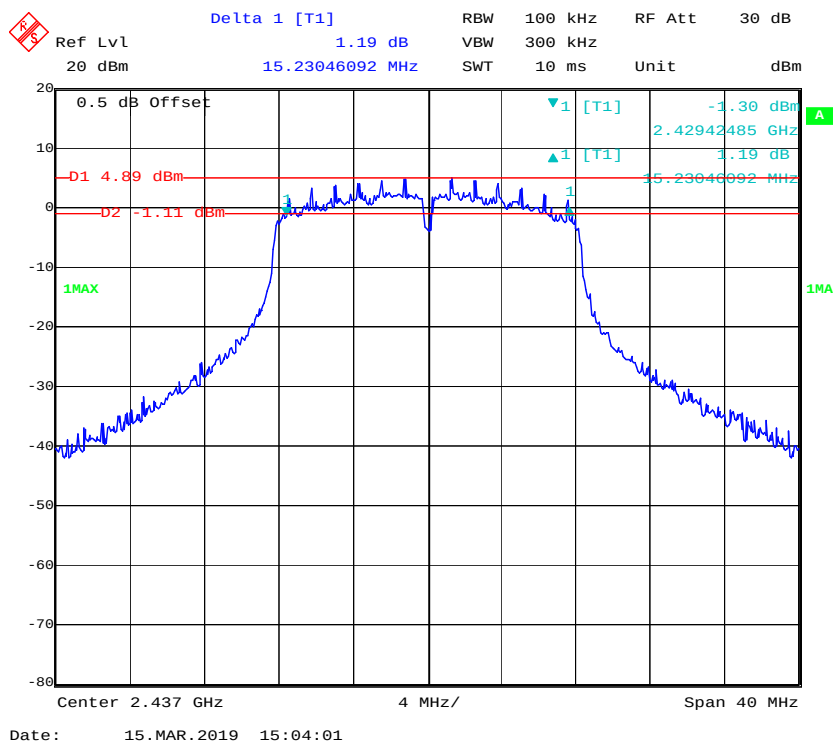


802.11g High Channel

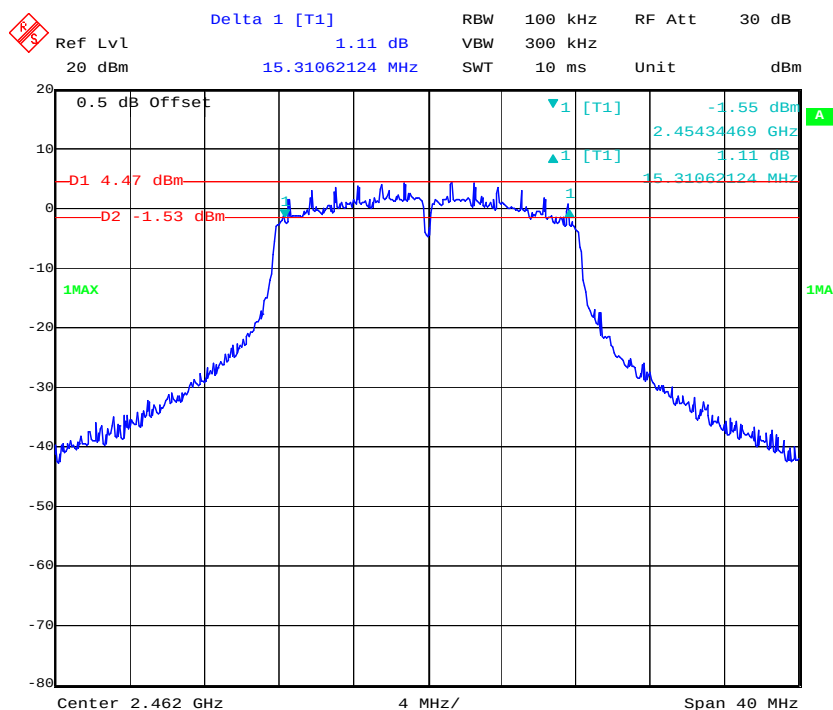


Date: 15.MAR.2019 15:13:04

802.11n ht20 Low Channel

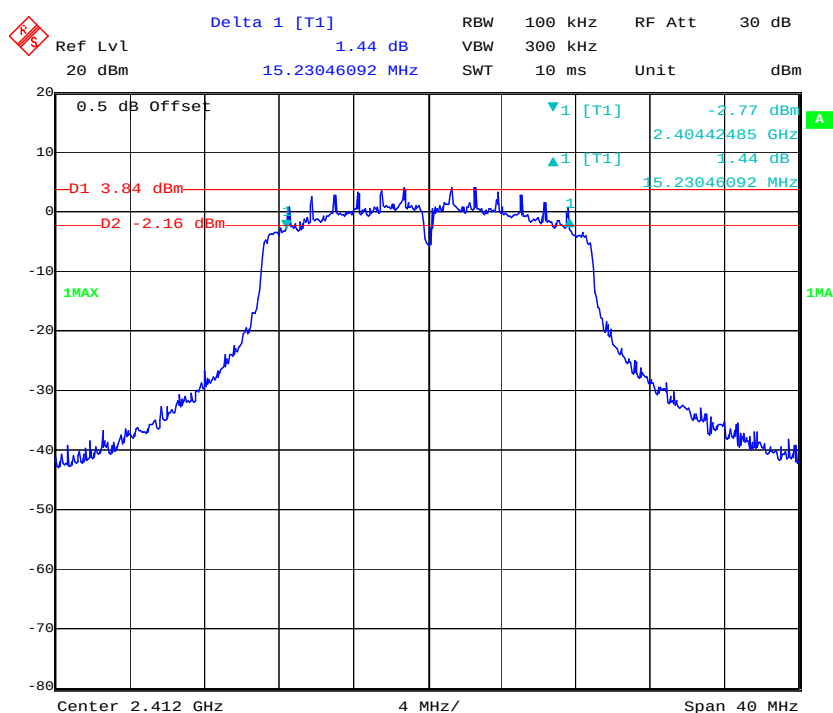


Date: 15.MAR.2019 15:25:30


802.11n ht20 Middle Channel

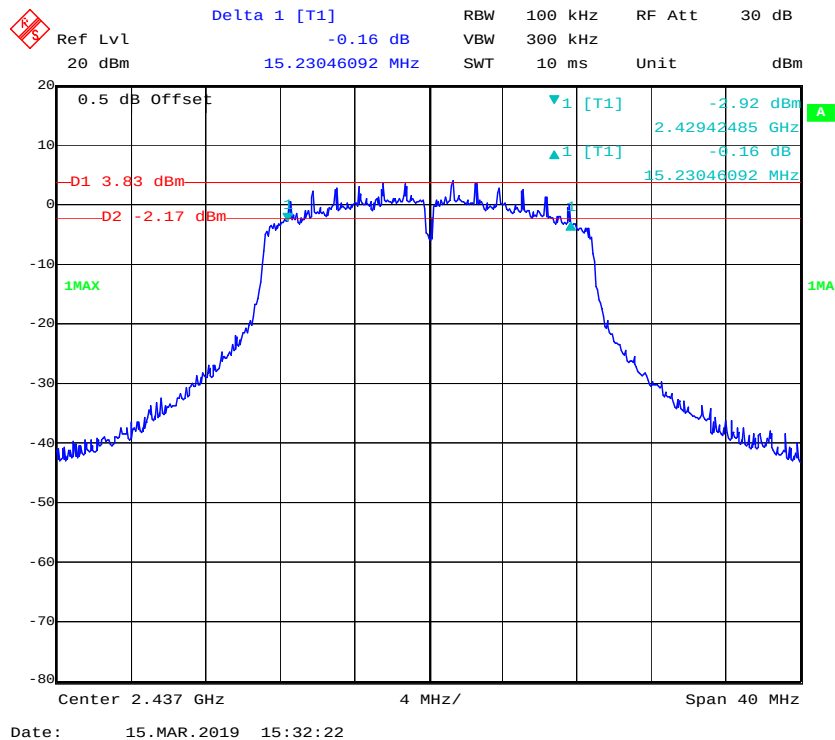

802.11n ht20 High Channel

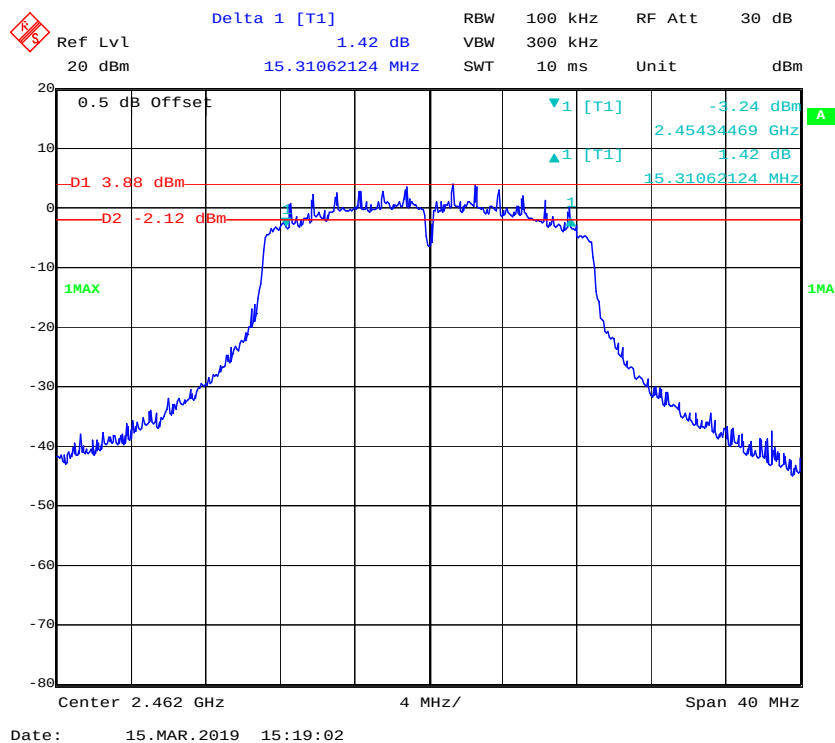


BLE Low Channel

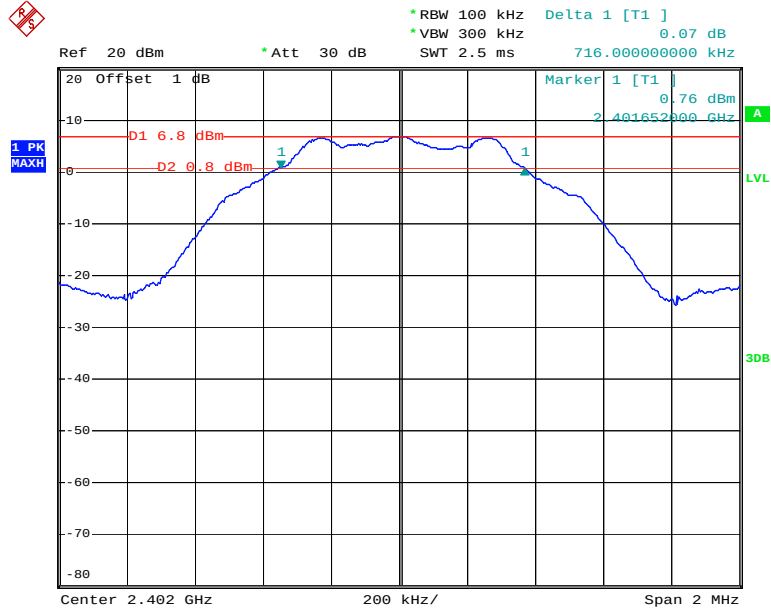


Date: 5.MAR.2019 11:47:46

BLE Middle Channel

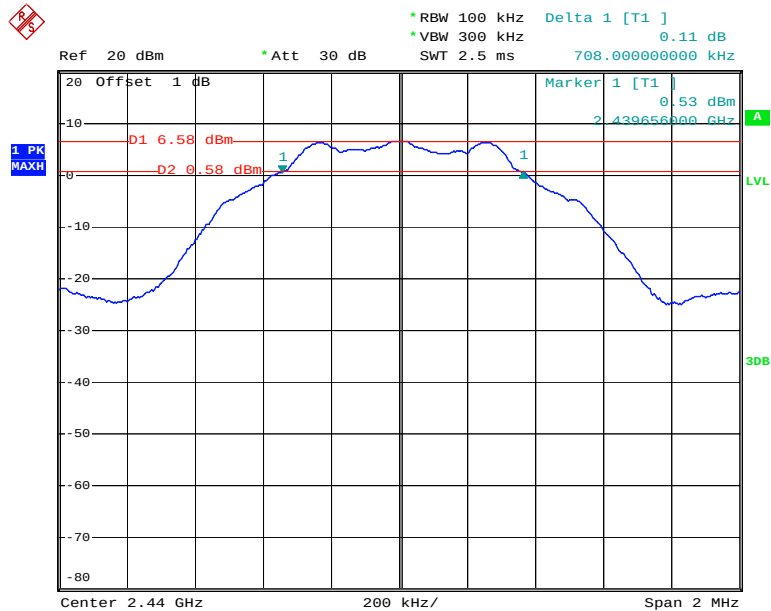

Date: 5.MAR.2019 11:49:49

BLE High Channel

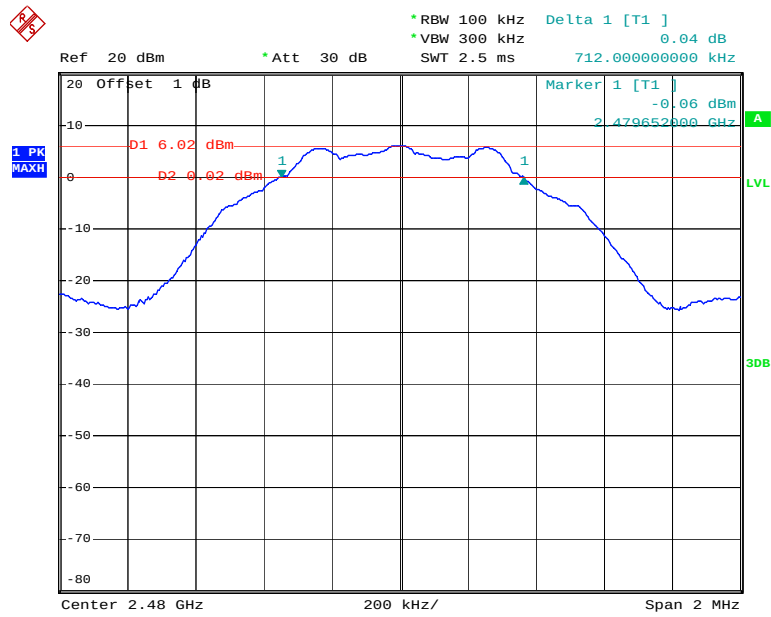

Date: 5.MAR.2019 11:51:43


FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.
4. Set the power Meter to test Peak output power, record the result as peak power.
5. Set the power meter to test average output power, record the result as average power.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2018-12-10	2019-12-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	23.5~24.5 °C
Relative Humidity:	56~57%
ATM Pressure:	100.5~ 100.7kPa

* The testing was performed by Carrie He 2019-03-05 and 2019-03-15

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table.

Test mode	Channel	Frequency (MHz)	Max Peak Conducted Output Power (dBm)	Max Conducted Average Output Power (dBm)	Limit (dBm)
802.11b	Low	2412	18.41	15.74	30
	Middle	2437	18.03	15.68	30
	High	2462	17.56	15.72	30
802.11g	Low	2412	23.19	15.11	30
	Middle	2437	23.35	14.98	30
	High	2462	23.97	14.84	30
802.11n ht20	Low	2412	23.85	14.05	30
	Middle	2437	23.29	13.92	30
	High	2462	23.24	13.73	30
BLE	Low	2402	6.97	/	30
	Middle	2440	6.78	/	30
	High	2480	6.24	/	30

Note: The data above was tested in conducted mode and the antenna gain is 1.2 dBi

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

According to FCC§15.247(d):In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).



Test Procedure



1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2018/8/3	2019/8/3
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

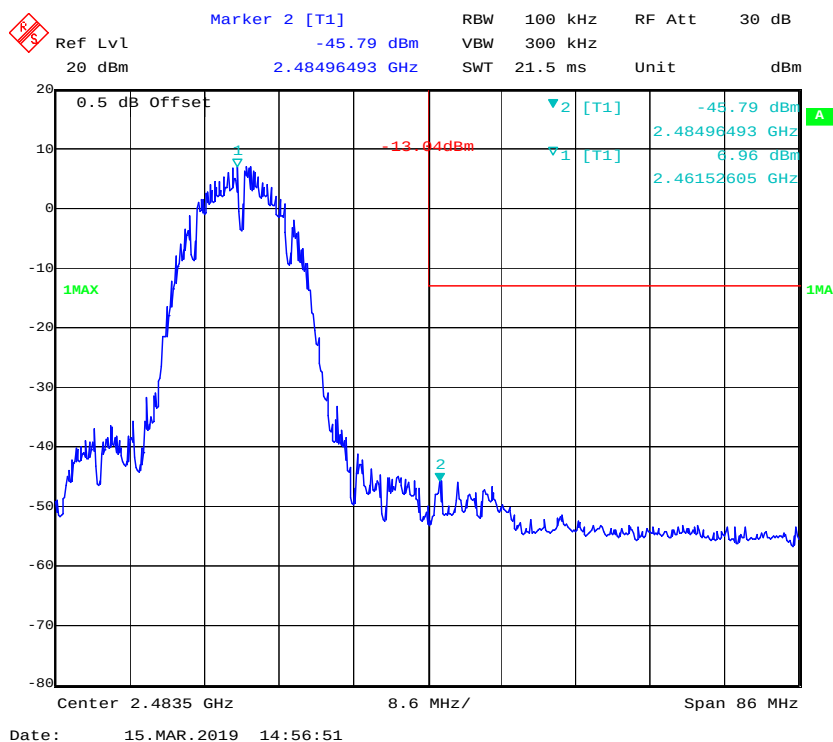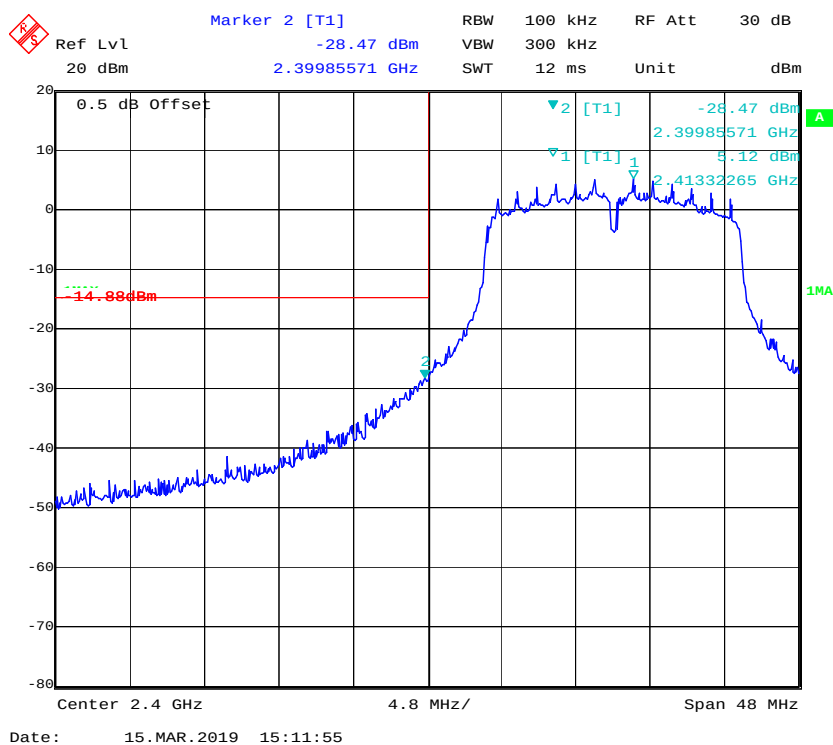802.11b: Band Edge, Right Side**802.11g: Band Edge, Left Side**

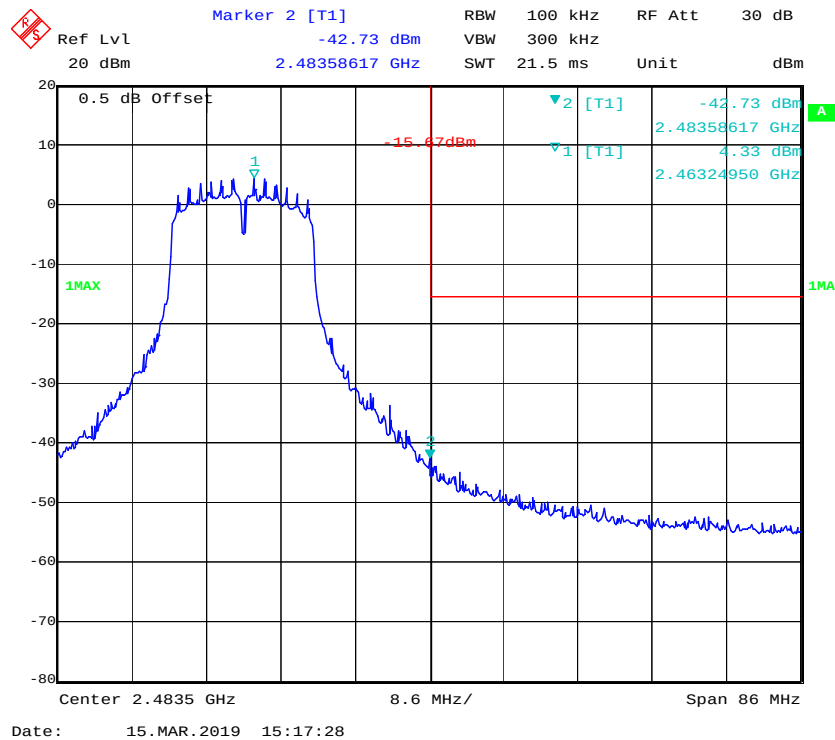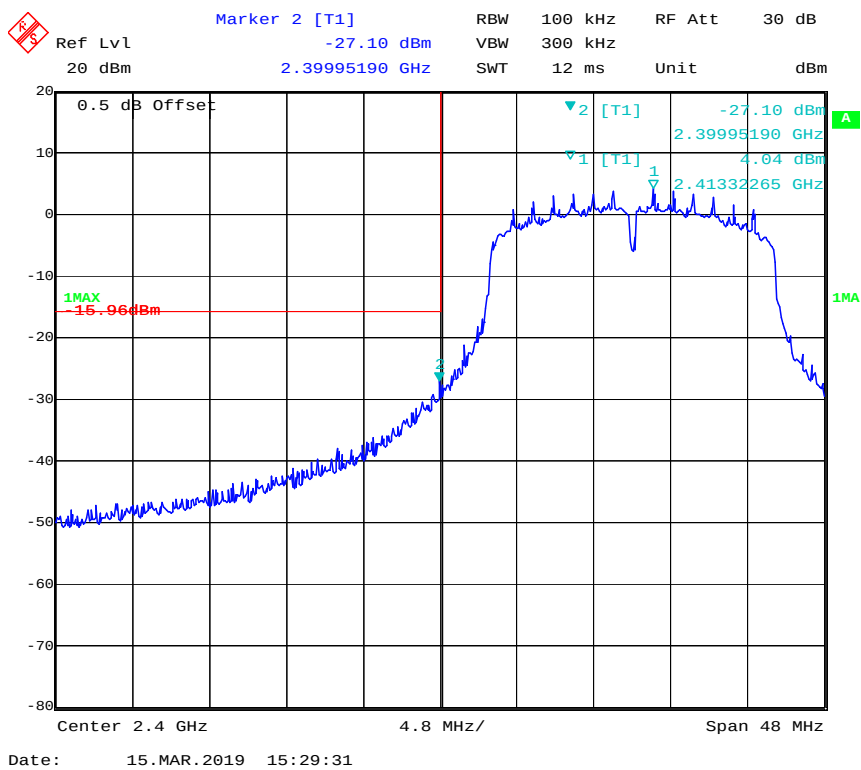802.11g: Band Edge, Right Side**802.11n ht20 Band Edge, Left Side**

Ref Lvl 20 dBm Marker 2 [T1] -43.93 dBm RBW 100 kHz VBW 300 kHz RF Att 30 dB
 20 dBm 2.48393086 GHz SWT 21.5 ms Unit dBm

0.5 dB Offset

1MAX

1

2

2 [T1] -43.93 dBm
 2.48393086 GHz
 3.56 dBm
 2.46083667 GHz

16.44dBm

Center 2.4835 GHz 8.6 MHz/ Span 86 MHz

Date: 15.MAR.2019 15:23:03

Ref 20 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 2.5 ms

Marker 1 [T1] 6.80 dBm 2.399872000 GHz

Marker 2 [T1] -47.47 dBm


1 PK MAXH

13.20 dBm

Center 2.4 GHz 800 kHz/ Span 8 MHz

Page 50 of 59

BLE Band Edge, Right Side

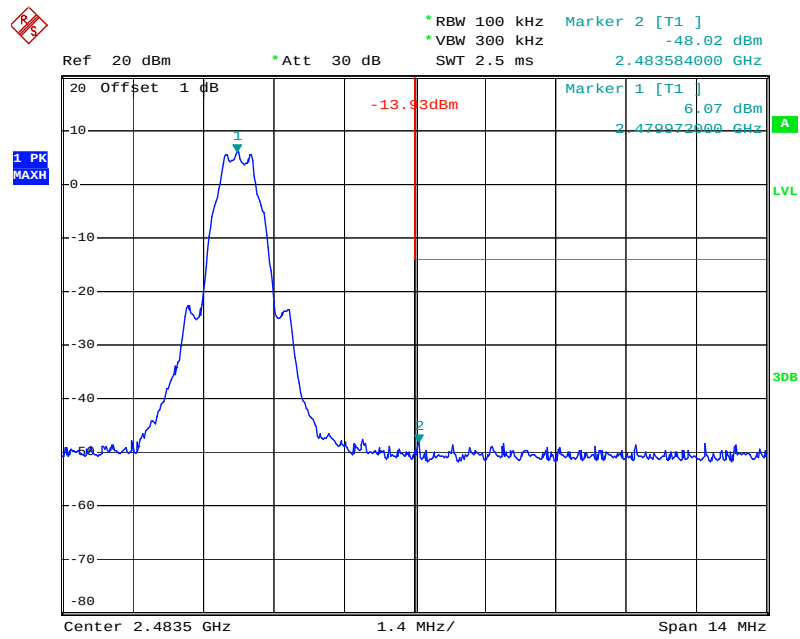

Date: 5.MAR.2019 11:52:50

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
4. Use the peak marker function to determine the maximum amplitude level.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2018/8/3	2019/8/3
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	23.5~24.5 °C
Relative Humidity:	56~57%
ATM Pressure:	100.5~ 100.7kPa

* The testing was performed by Carrie He 2019-03-05 and 2019-03-15


Test Result: Compliance

Test Mode: Transmitting


Test Result: Compliant. Please refer to the following table and plots

Test mode	Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
802.11b	Low	2412	-5.22	≤8
	Middle	2437	-5.66	≤8
	High	2462	-4.95	≤8
802.11g	Low	2412	-8.37	≤8
	Middle	2437	-8.98	≤8
	High	2462	-8.75	≤8
802.11n ht20	Low	2412	-9.30	≤8
	Middle	2437	-9.96	≤8
	High	2462	-10.03	≤8
BLE	Low	2402	-6.63	≤8
	Middle	2440	-6.96	≤8
	High	2480	-7.62	≤8


Power Spectral Density, 802.11b Low Channel

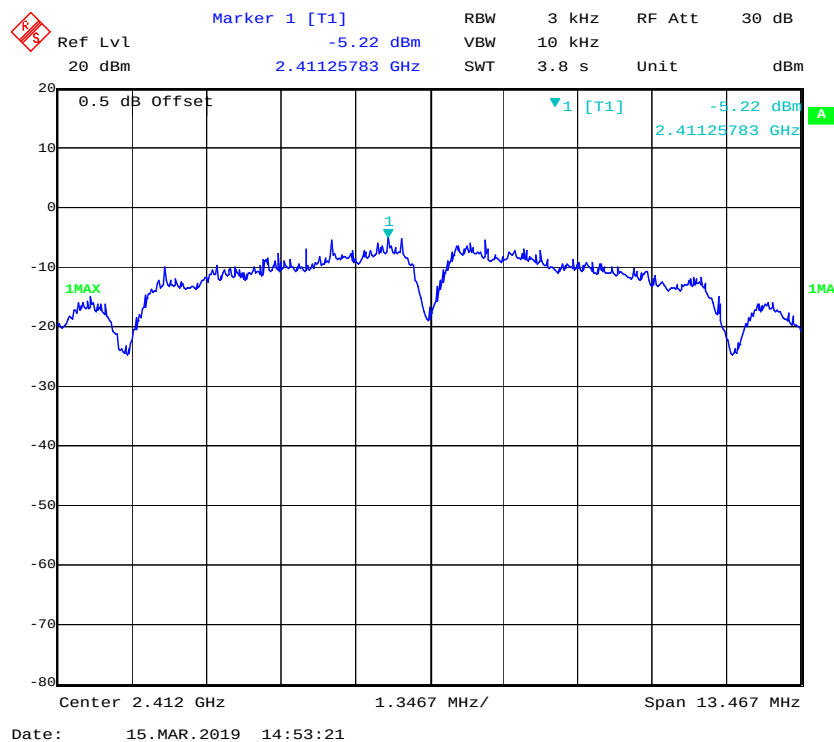


Power Spectral Density, 802.11b Middle Channel

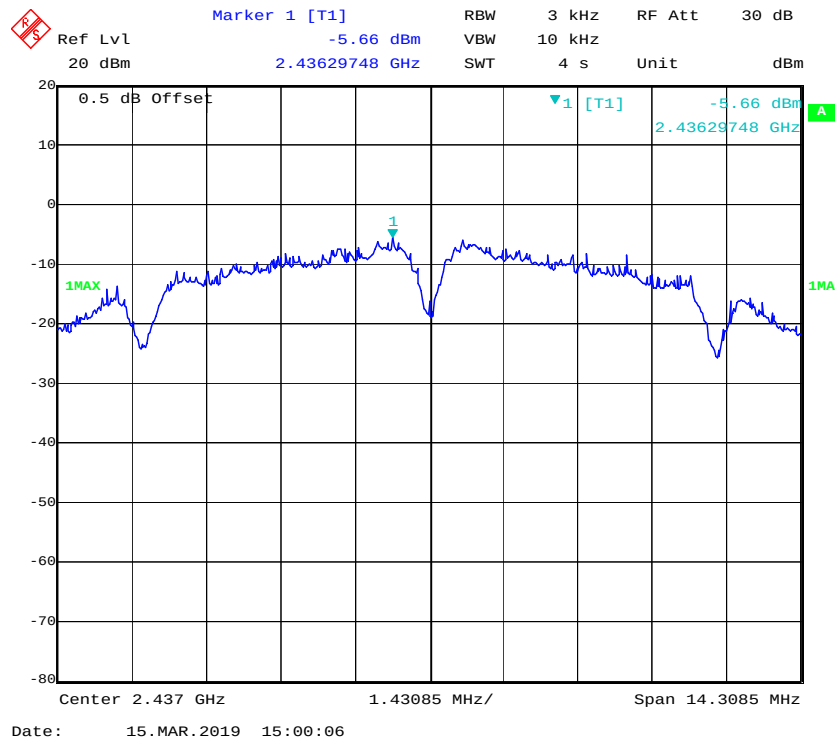


Power Spectral Density, 802.11b High Channel

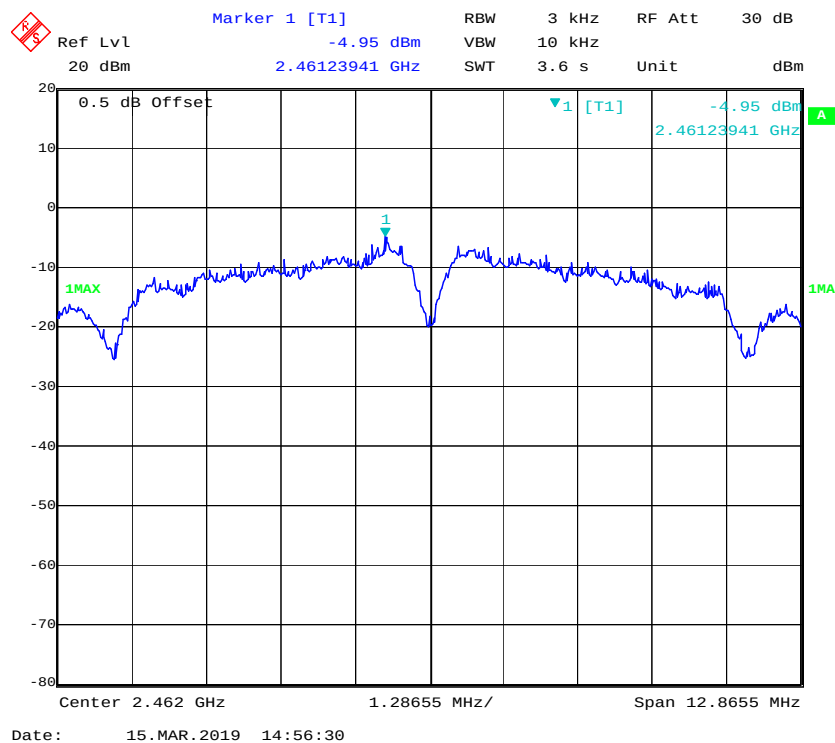


Power Spectral Density, 802.11g Low Channel

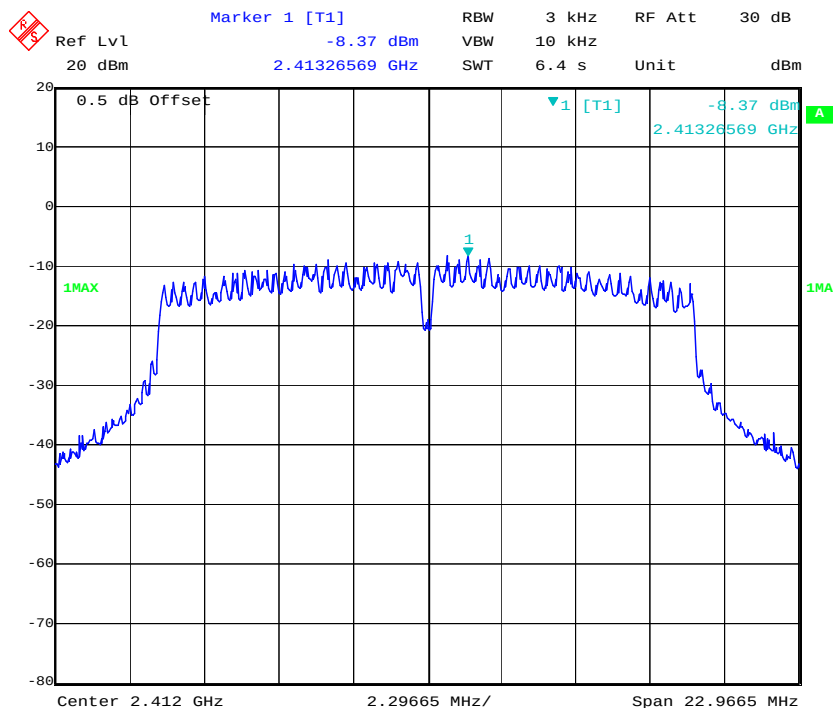


Power Spectral Density, 802.11g Middle Channel

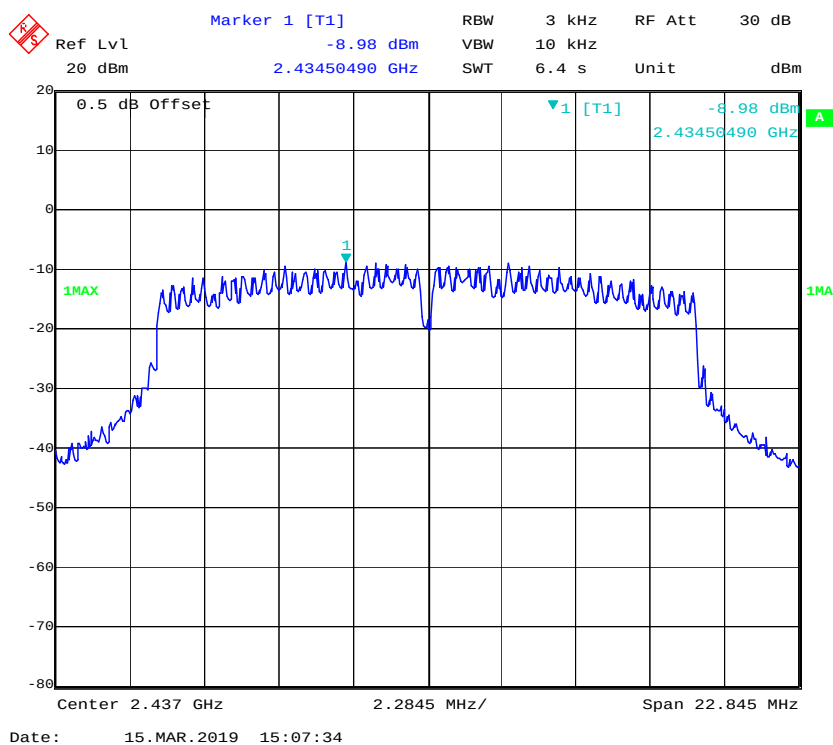

Power Spectral Density, 802.11g High Channel

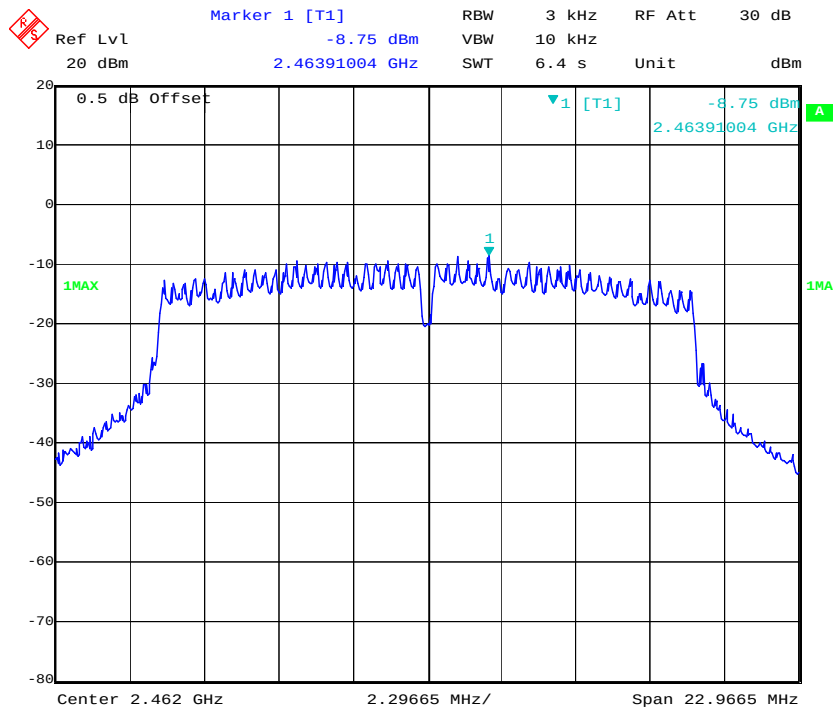

Power Spectral Density, 802.11n ht20 Low Channel

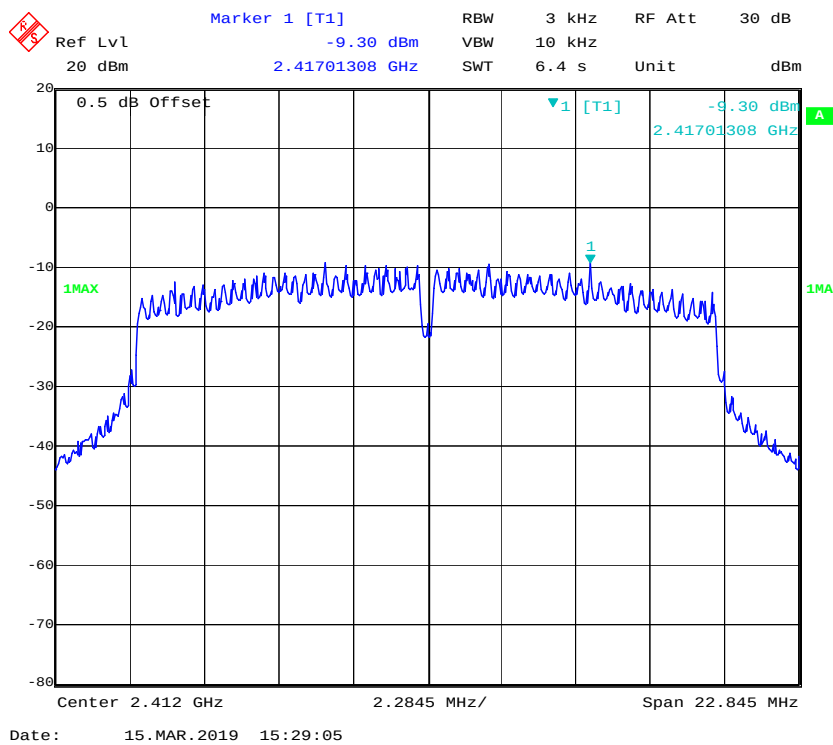

Marker 1 [T1] RBW 3 kHz RF Att 30 dB
 Ref Lvl -9.96 dBm VBW 10 kHz
 20 dBm 2.43418443 GHz SWT 6.4 s Unit dBm

0.5 dB Offset
 1 [T1] -9.96 dBm
 2.43418443 GHz

1MAX
 1A

Center 2.437 GHz 2.2845 MHz/ Span 22.845 MHz

Date: 15.MAR.2019 15:35:36

Ref Lvl 20 dBm

Marker 1 [T1] -10.03 dBm

RBW 3 kHz

VBW 10 kHz

SWT 6.4 s

RF Att 30 dB

Unit dBm

0.5 dB Offset

▼1 [T1] -10.03 dBm

2.46137866 GHz

1MAX

1MA


Center 2.462 GHz

2.29665 MHz/

Span 22.9665 MHz


Date: 15.MAR.2019 15:22:40

Power Spectral Density, BLE Low Channel

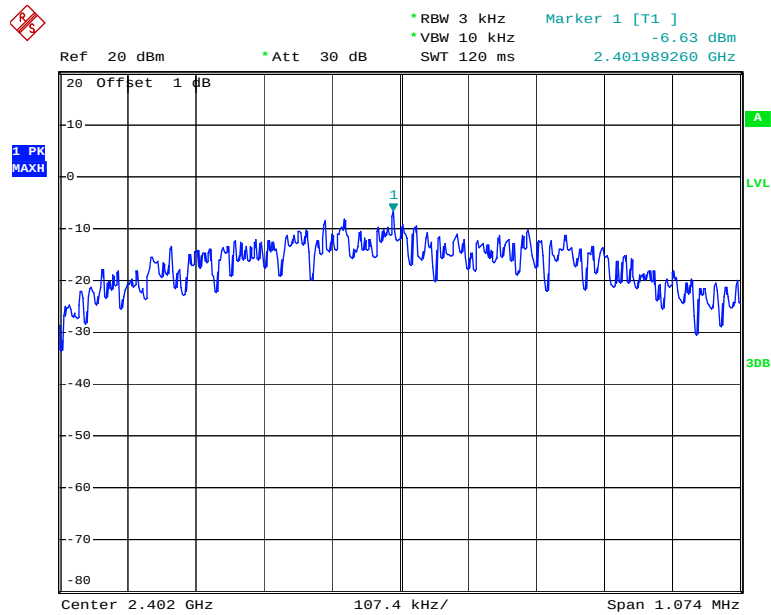


Date: 5.MAR.2019 11:48:28

Power Spectral Density, BLE Middle Channel

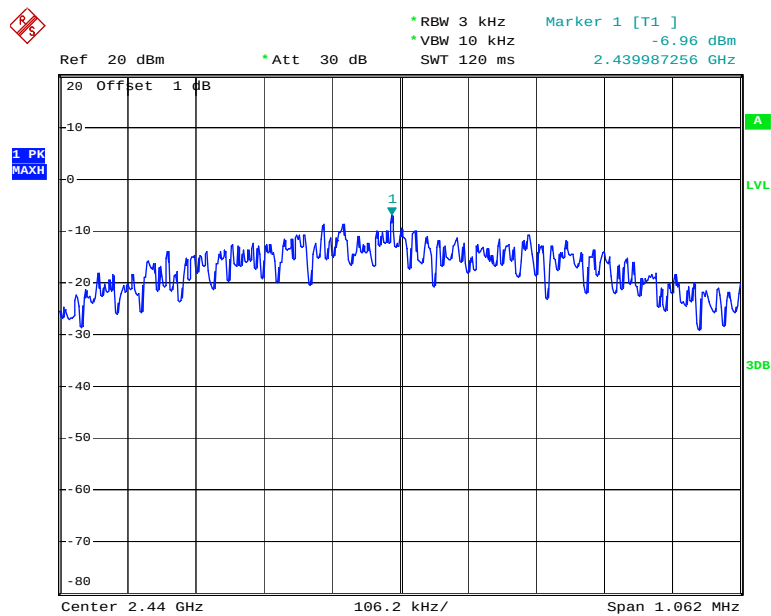

Date: 5.MAR.2019 11:50:31

Power Spectral Density, BLE High Channel

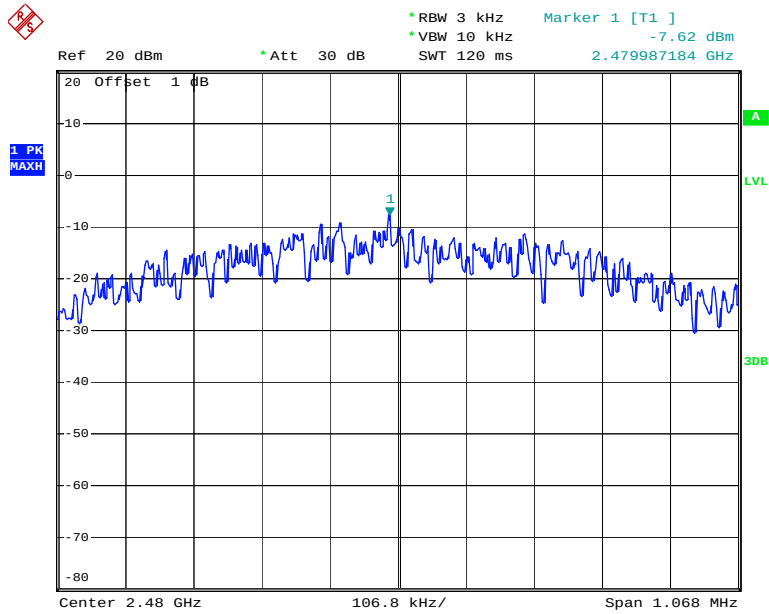

Date: 5.MAR.2019 11:52:24

***** END OF REPORT *****