


Appendix E): Power Spectral Density

Result Table




Mode	Antenna	Channel	Power Spectral Density [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant1	LCH	-9.772	8	PASS
11B	Ant2	LCH	-9.042	8	PASS
11B	Ant1	MCH	-9.480	8	PASS
11B	Ant2	MCH	-9.272	8	PASS
11B	Ant1	HCH	-9.116	8	PASS
11B	Ant2	HCH	-9.650	8	PASS
11G	Ant1	LCH	-18.316	8	PASS
11G	Ant2	LCH	-16.993	8	PASS
11G	Ant1	MCH	-17.279	8	PASS
11G	Ant2	MCH	-17.302	8	PASS
11G	Ant1	HCH	-16.630	8	PASS
11G	Ant2	HCH	-17.528	8	PASS
11N20SISO	Ant1	LCH	-18.562	8	PASS
11N20SISO	Ant2	LCH	-17.524	8	PASS
11N20SISO	Ant1	MCH	-17.180	8	PASS
11N20SISO	Ant2	MCH	-16.989	8	PASS
11N20SISO	Ant1	HCH	-16.452	8	PASS
11N20SISO	Ant2	HCH	-17.408	8	PASS
11N20MIMO	Ant1	LCH	-18.924	8	PASS
11N20MIMO	Ant2	LCH	-18.776	8	PASS
11N20MIMO	Ant1+2	LCH	-15.84	8	PASS
11N20MIMO	Ant1	MCH	-18.447	8	PASS
11N20MIMO	Ant2	MCH	-19.238	8	PASS
11N20MIMO	Ant1+2	MCH	-15.81	8	PASS
11N20MIMO	Ant1	HCH	-17.192	8	PASS
11N20MIMO	Ant2	HCH	-18.446	8	PASS
11N20MIMO	Ant1+2	HCH	-14.76	8	PASS
11N40SISO	Ant1	LCH	-20.278	8	PASS
11N40SISO	Ant2	LCH	-21.124	8	PASS
11N40SISO	Ant1	MCH	-20.156	8	PASS
11N40SISO	Ant2	MCH	-21.362	8	PASS
11N40SISO	Ant1	HCH	-19.568	8	PASS
11N40SISO	Ant2	HCH	-20.852	8	PASS
11N40MIMO	Ant1	LCH	-22.438	8	PASS
11N40MIMO	Ant2	LCH	-22.011	8	PASS
11N40MIMO	Ant1+2	LCH	-19.21	8	PASS
11N40MIMO	Ant1	MCH	-21.537	8	PASS
11N40MIMO	Ant2	MCH	-22.329	8	PASS
11N40MIMO	Ant1+2	MCH	-18.90	8	PASS
11N40MIMO	Ant1	HCH	-21.394	8	PASS
11N40MIMO	Ant2	HCH	-23.072	8	PASS
11N40MIMO	Ant1+2	HCH	-19.14	8	PASS




Test Graph


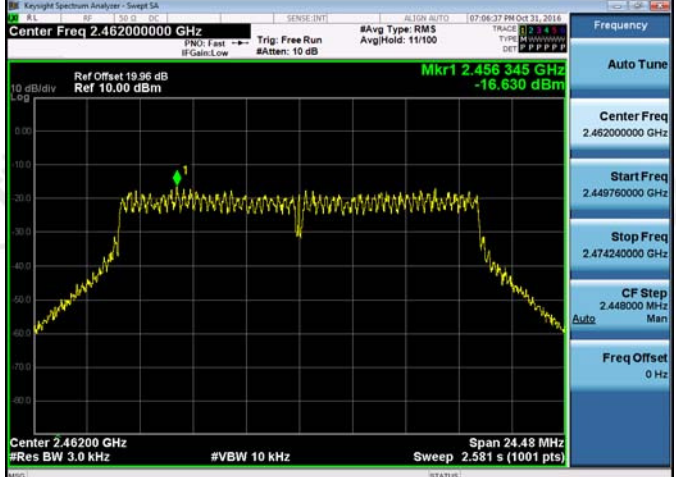



<p>11G/LCH</p>	
<p>11G/MCH</p>	
<p>11G/HCH</p>	




<p>11N20SISO/LCH</p>	
<p>11N20SISO/MCH</p>	
<p>11N20SISO/HCH</p>	

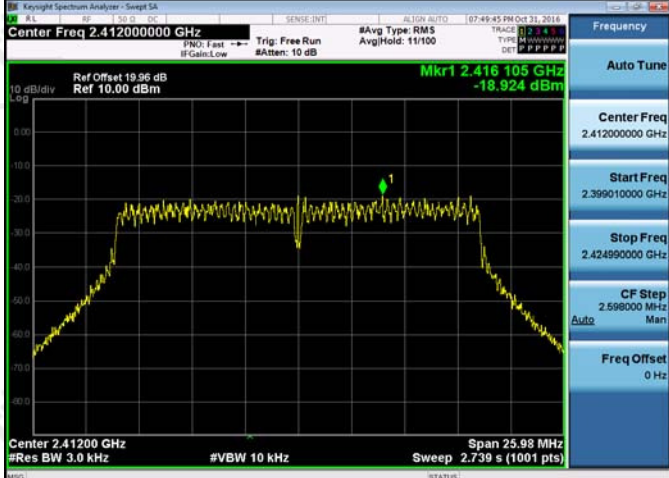
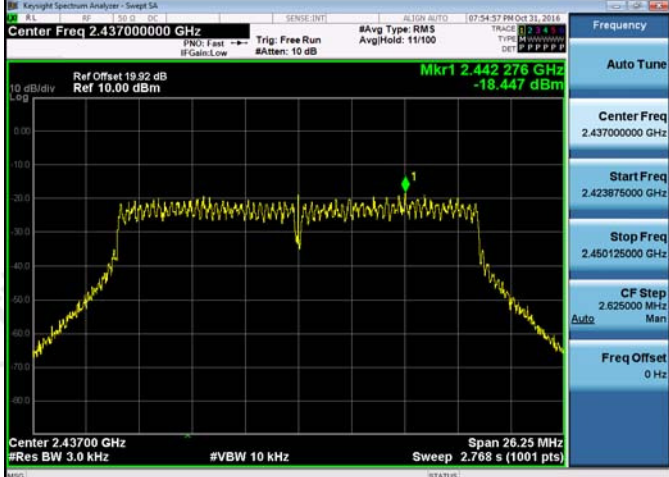
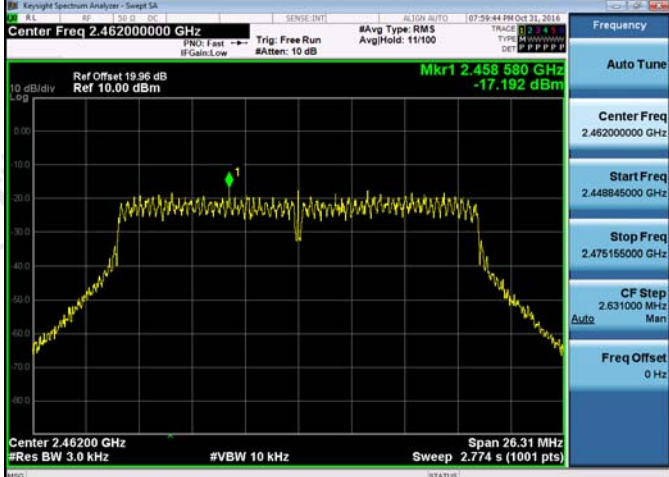
<p>11N20MIMO/LCH</p>	 <p>Center Freq 2.41200000 GHz</p> <p>Ref Offset 19.96 dB Ref 10.00 dBm</p> <p>Mkr1 2.416105 GHz -18.924 dBm</p> <p>Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 25.98 MHz Sweep 2.739 s (1001 pts)</p>
<p>11N20MIMO/MCH</p>	 <p>Center Freq 2.43700000 GHz</p> <p>Ref Offset 19.92 dB Ref 10.00 dBm</p> <p>Mkr1 2.442276 GHz -18.447 dBm</p> <p>Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 26.25 MHz Sweep 2.768 s (1001 pts)</p>
<p>11N20MIMO/HCH</p>	 <p>Center Freq 2.46200000 GHz</p> <p>Ref Offset 19.96 dB Ref 10.00 dBm</p> <p>Mkr1 2.458580 GHz -17.192 dBm</p> <p>Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 26.31 MHz Sweep 2.774 s (1001 pts)</p>

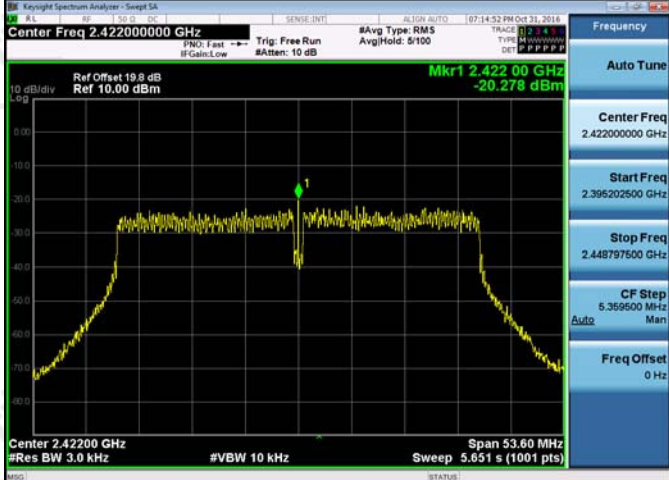
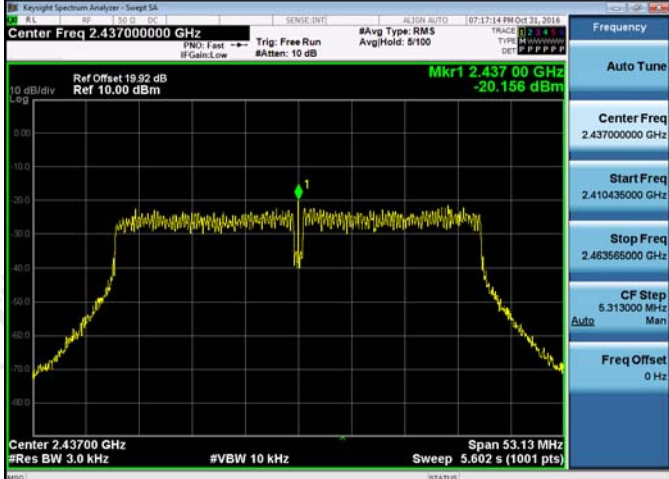
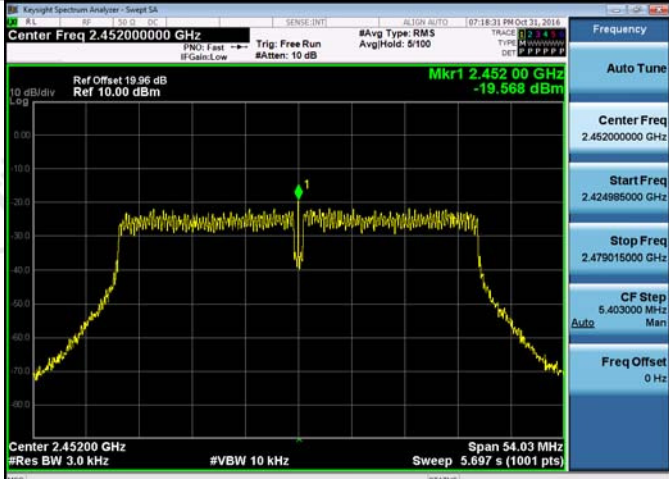
<p>11N40SISO/LCH</p>	
<p>11N40SISO/MCH</p>	
<p>11N40SISO/HCH</p>	

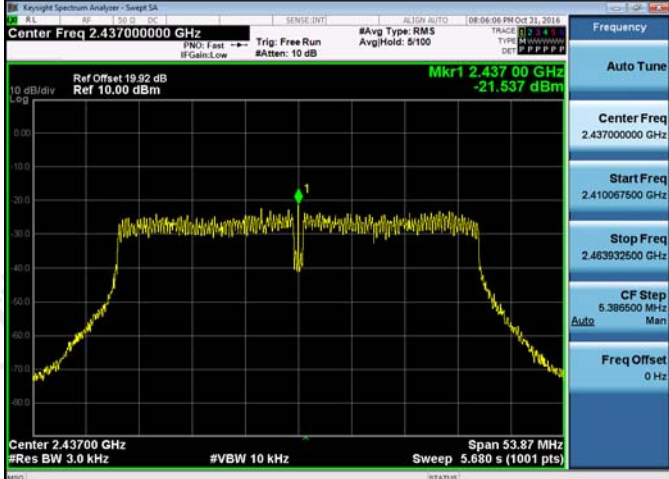
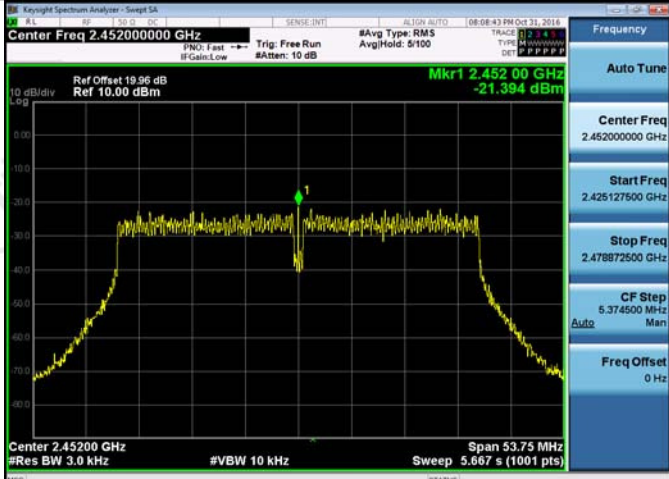

<p>11N40MIMO/LCH</p>	
<p>11N40MIMO/MCH</p>	
<p>11N40MIMO/HCH</p>	

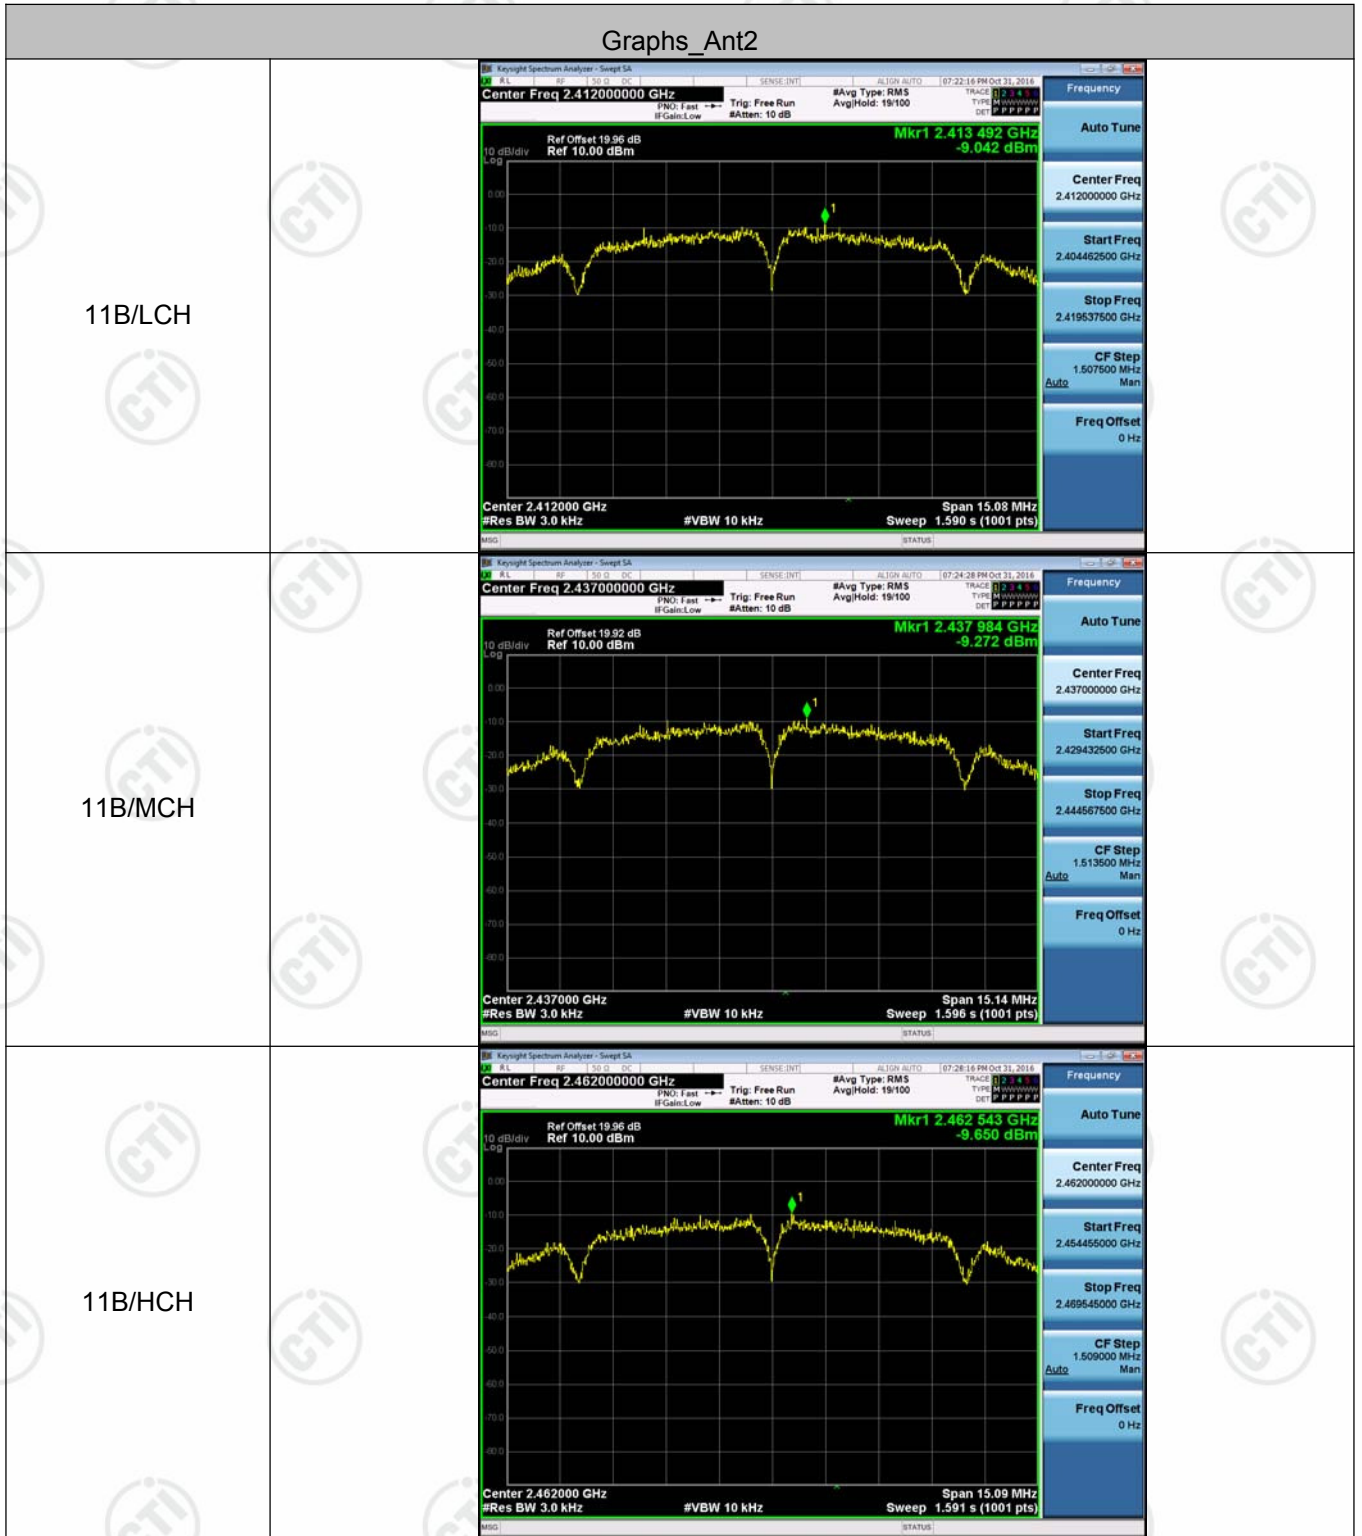

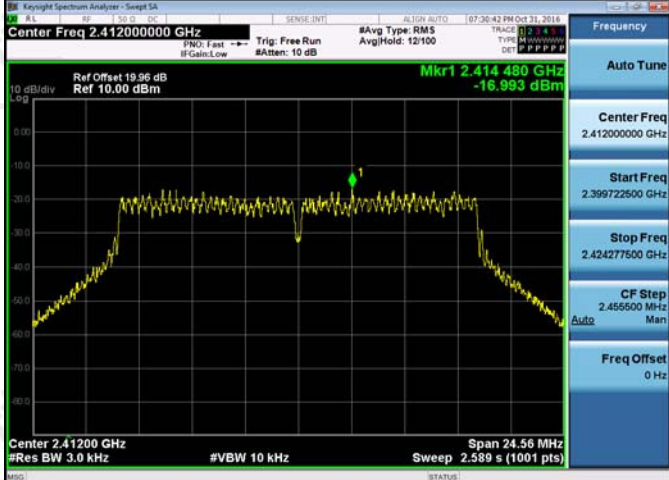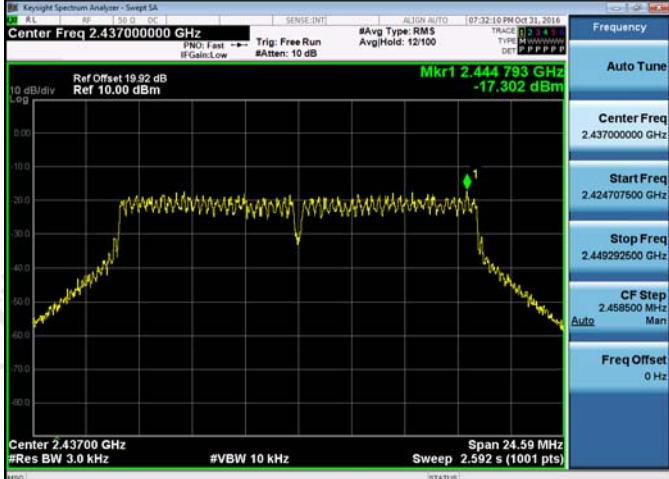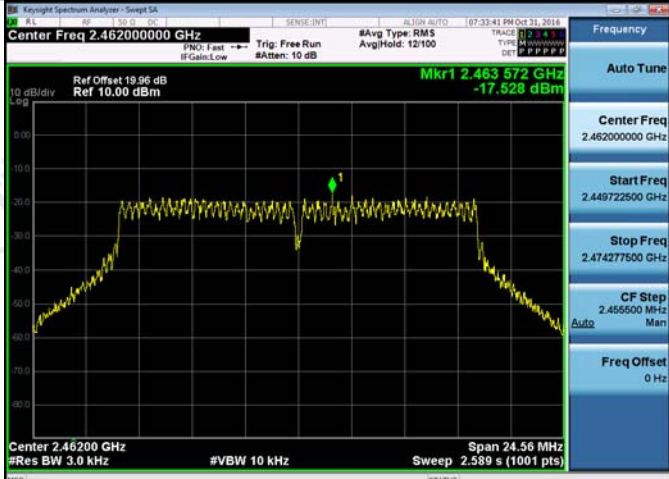
<p>11G/LCH</p>	
<p>11G/MCH</p>	
<p>11G/HCH</p>	
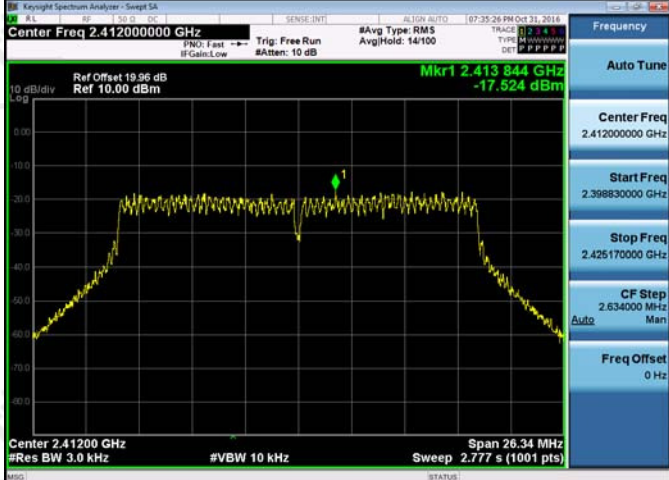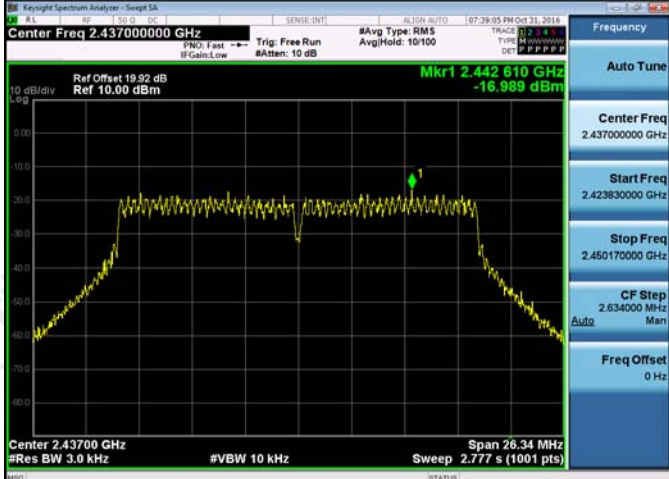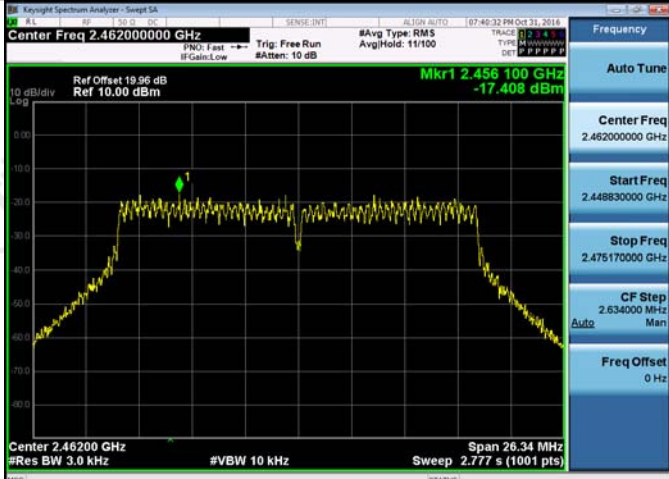
<p>11N20SISO/LCH</p>	 <p>Center Freq 2.41200000 GHz</p> <p>Center Freq 2.413844 GHz -17.524 dBm</p> <p>Center 2.41200 GHz #Res BW 3.0 kHz</p> <p>Span 26.34 MHz Sweep 2.777 s (1001 pts)</p>
<p>11N20SISO/MCH</p>	 <p>Center Freq 2.43700000 GHz</p> <p>Center Freq 2.442610 GHz -16.989 dBm</p> <p>Center 2.43700 GHz #Res BW 3.0 kHz</p> <p>Span 26.34 MHz Sweep 2.777 s (1001 pts)</p>
<p>11N20SISO/HCH</p>	 <p>Center Freq 2.46200000 GHz</p> <p>Center Freq 2.456100 GHz -17.408 dBm</p> <p>Center 2.46200 GHz #Res BW 3.0 kHz</p> <p>Span 26.34 MHz Sweep 2.777 s (1001 pts)</p>
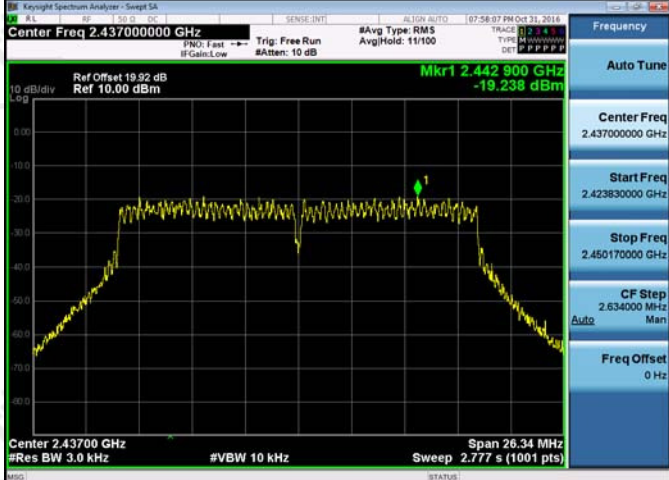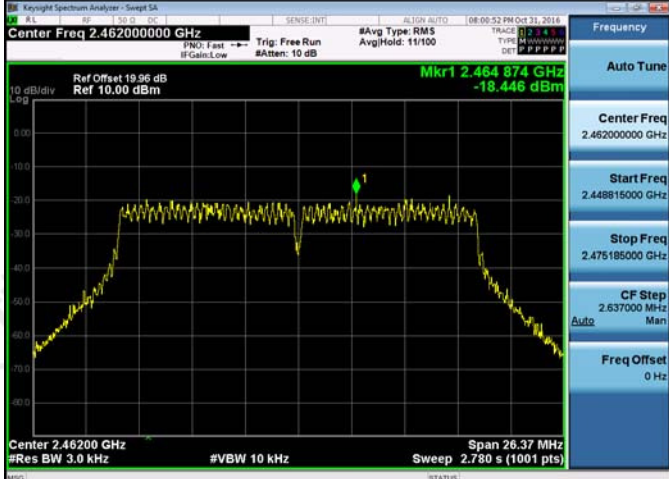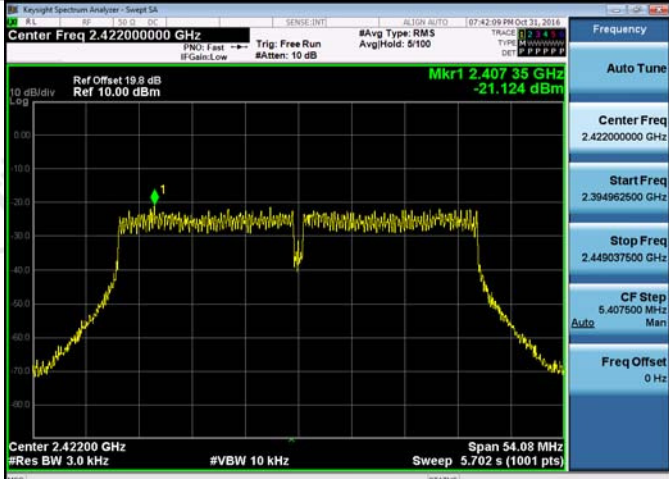
<p>11N20MIMO/MCH</p>	 <p>Center Freq 2.43700000 GHz</p> <p>Ref Offset 19.92 dB Ref 10.00 dBm</p> <p>Mkr1 2.442 900 GHz -19.238 dBm</p> <p>Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 26.34 MHz Sweep 2.777 s (1001 pts)</p>
<p>11N20MIMO/HCH</p>	 <p>Center Freq 2.46200000 GHz</p> <p>Ref Offset 19.96 dB Ref 10.00 dBm</p> <p>Mkr1 2.464 874 GHz -18.446 dBm</p> <p>Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 26.37 MHz Sweep 2.780 s (1001 pts)</p>
<p>11N40SISO/LCH</p>	 <p>Center Freq 2.42200000 GHz</p> <p>Ref Offset 19.8 dB Ref 10.00 dBm</p> <p>Mkr1 2.407 35 GHz -21.124 dBm</p> <p>Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 54.08 MHz Sweep 5.702 s (1001 pts)</p>
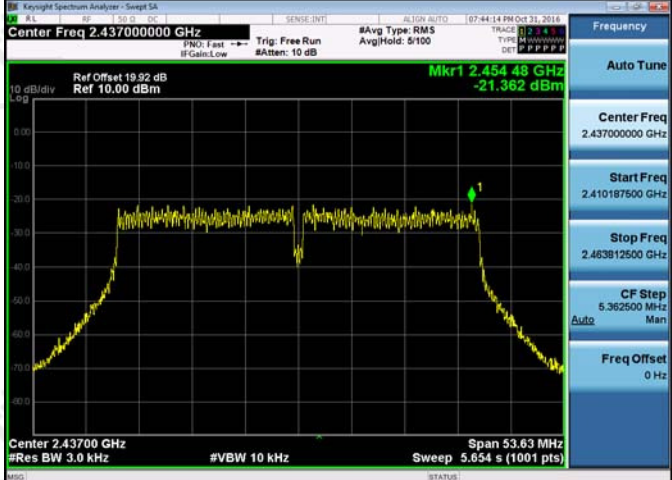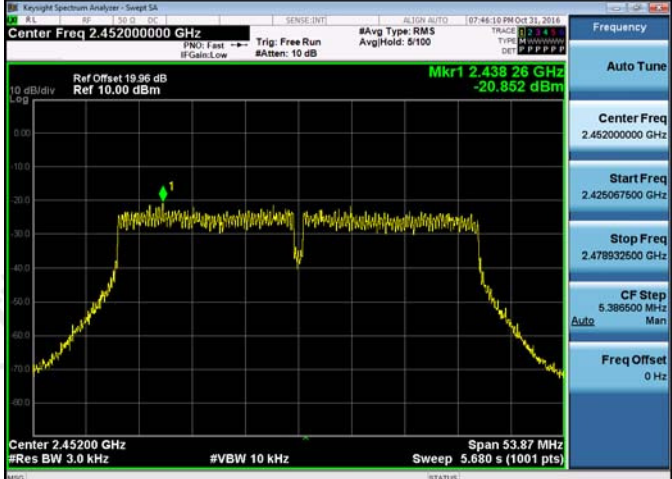
<p>11N40SISO/MCH</p>	
<p>11N40SISO/HCH</p>	
<p>11N40MIMO/LCH</p>	

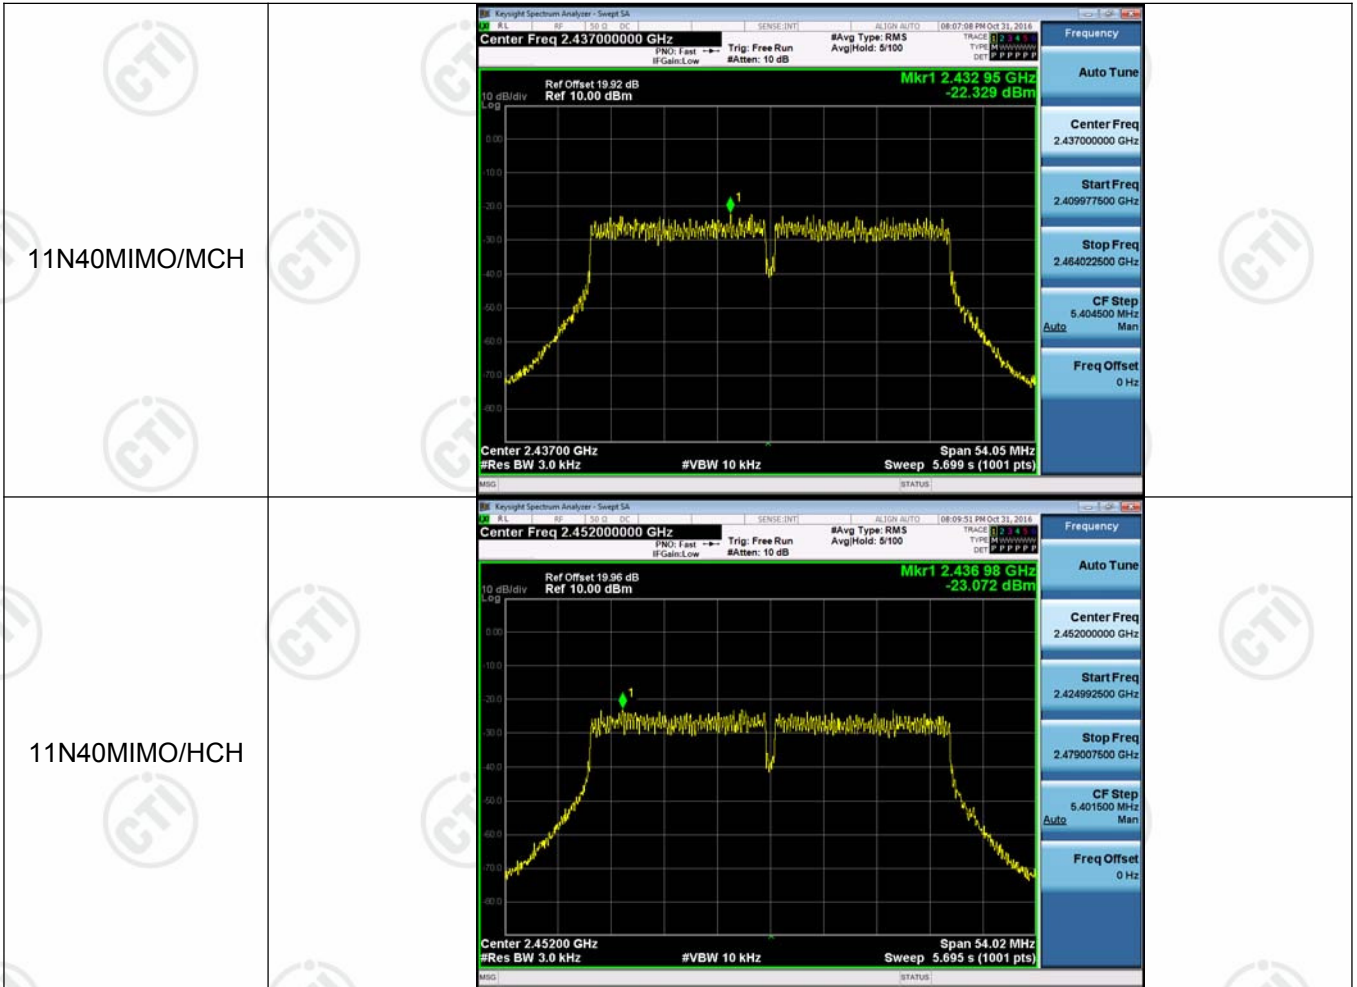

Appendix F): Antenna Requirement

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 3Bi.

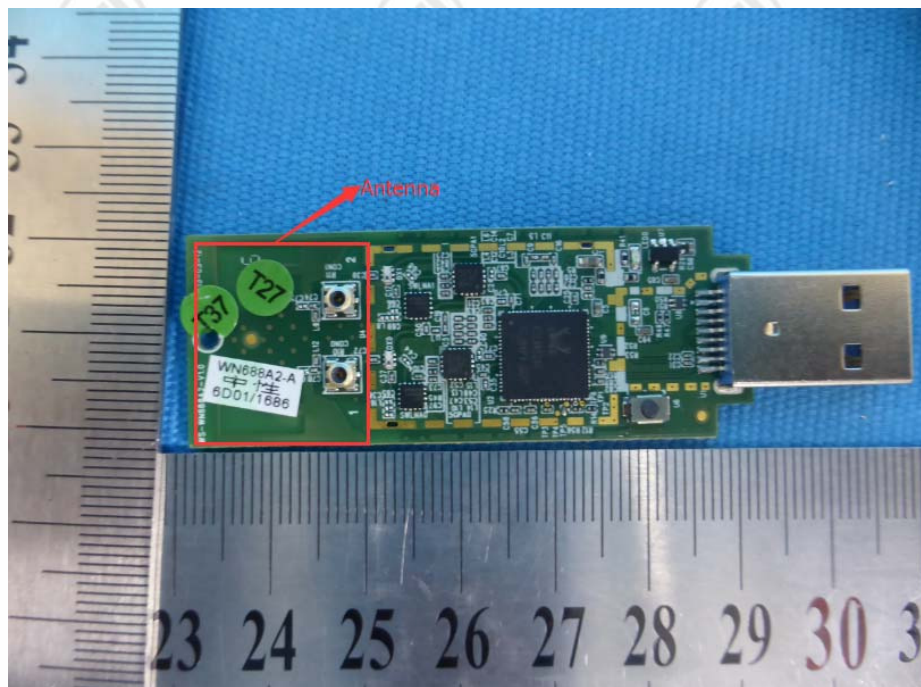

Appendix G): AC Power Line Conducted Emission

Test Procedure:	<p>Test frequency range :150KHz-30MHz</p> <ol style="list-style-type: none"> 1)The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement. 														
Limit:	<table border="1" data-bbox="464 1155 1334 1375"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency</p>	Frequency range (MHz)	Limit (dB μ V)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dB μ V)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													


Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


AC 120V, 60Hz

Live line:

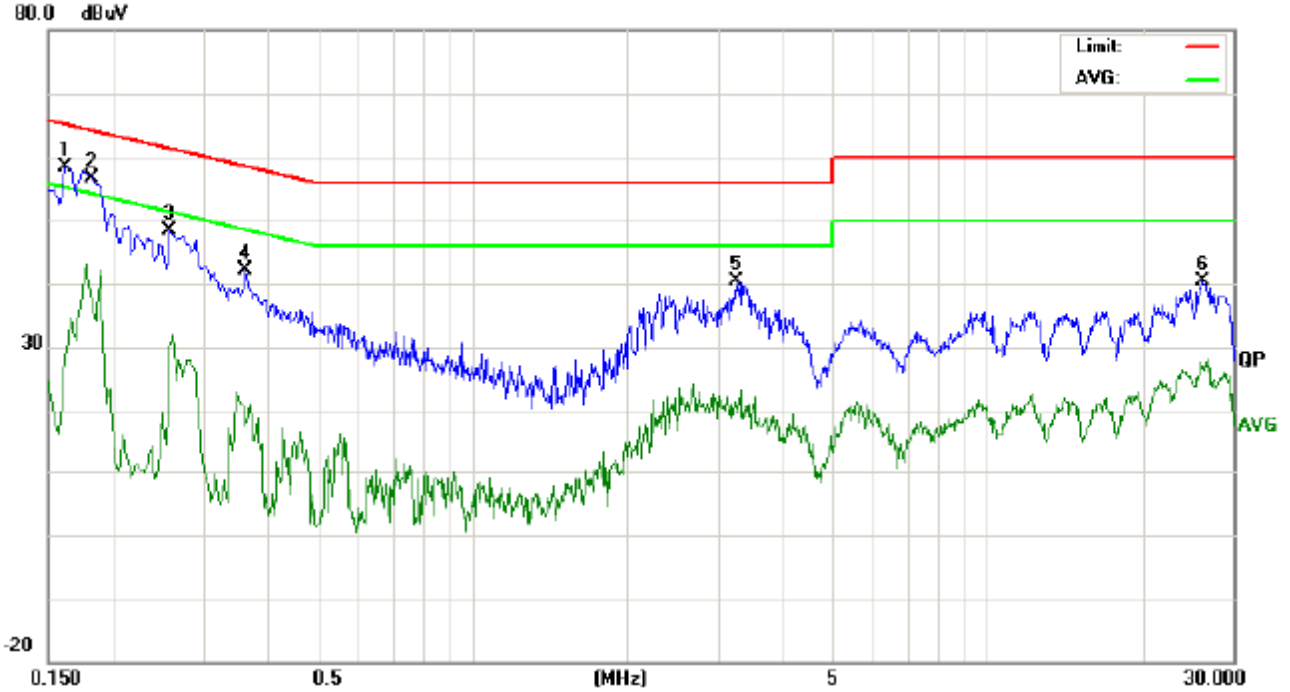

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1620	44.76	14.74	9.80	54.56	24.54	65.36	55.36	-10.80	-30.82	P			
2	0.1844	44.76	14.74	9.80	54.56	24.54	64.28	54.28	-9.72	-29.74	P			
3	0.2580	38.51	20.01	9.80	48.31	29.81	61.49	51.49	-13.18	-21.68	P			
4	0.3620	32.28	7.86	9.86	42.14	17.72	58.68	48.68	-16.54	-30.96	P			
5	3.2540	30.39	10.85	10.00	40.39	20.85	56.00	46.00	-15.61	-25.15	P			
6	26.2660	30.68	17.18	9.80	40.48	26.98	60.00	50.00	-19.52	-23.02	P			


Neutral line:
00.0 dBuV

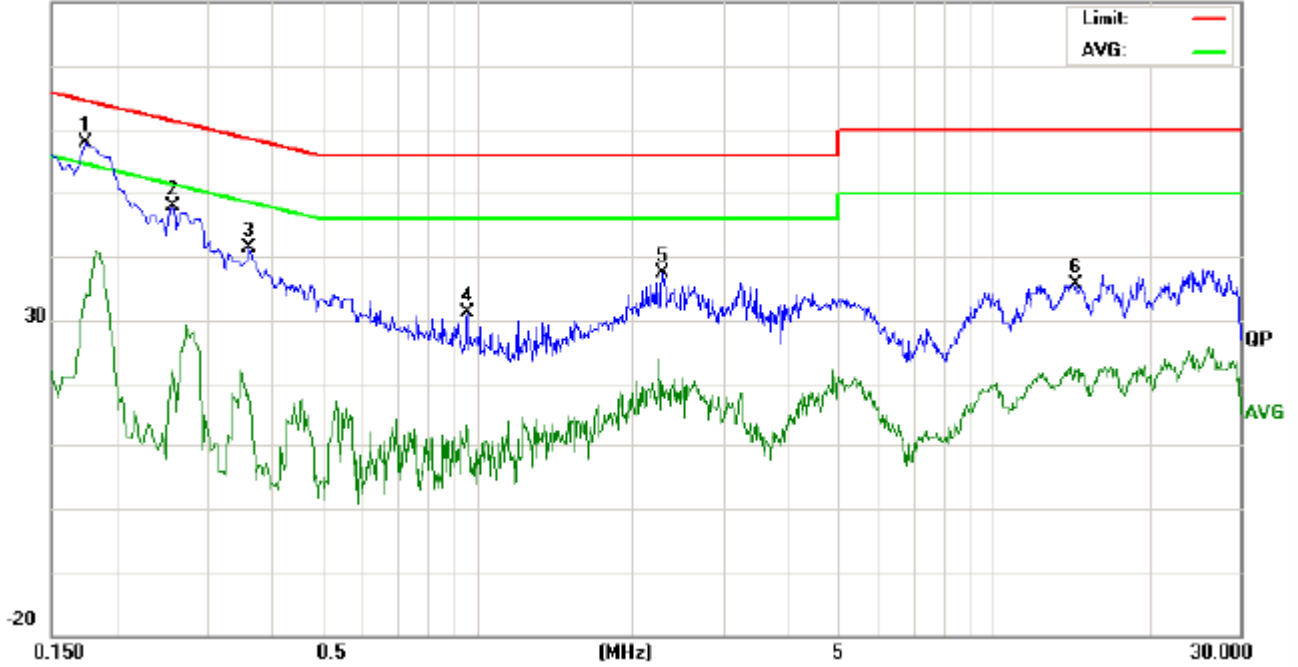

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1740	48.00	24.25	9.80	57.80	34.05	64.76	54.76	-6.96	-20.71	P			
2	0.2580	38.00	12.22	9.80	47.80	22.02	61.49	51.49	-13.69	-29.47	P			
3	0.3620	31.64	8.50	9.86	41.50	18.36	58.68	48.68	-17.18	-30.32	P			
4	0.9620	21.45	3.26	9.70	31.15	12.96	56.00	46.00	-24.85	-33.04	P			
5	2.2940	27.30	9.99	10.00	37.30	19.99	56.00	46.00	-18.70	-26.01	P			
6	14.4580	25.57	11.70	10.09	35.66	21.79	60.00	50.00	-24.34	-28.21	P			

AC 240V, 50Hz


Live line:

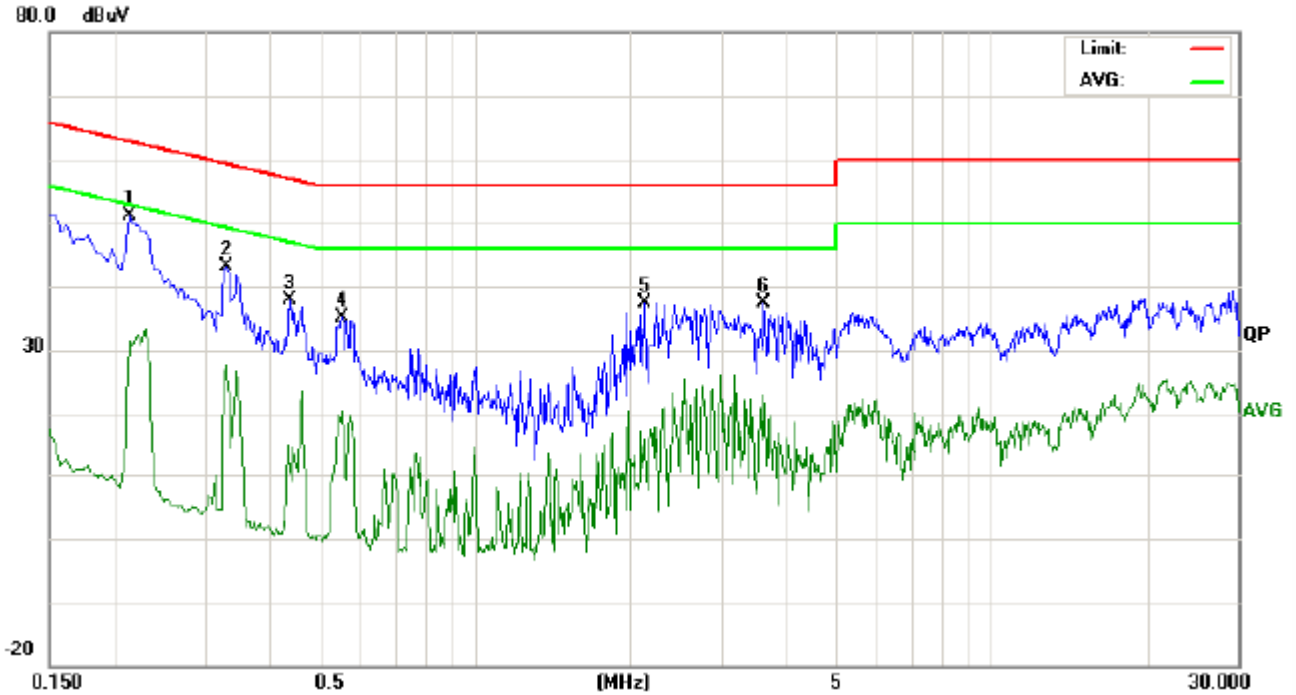

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2140	41.22	21.59	9.80	51.02	31.39	63.04	53.04	-12.02	-21.65	P			
2	0.3300	33.36	17.77	9.83	43.19	27.60	59.45	49.45	-16.26	-21.85	P			
3	0.4380	27.98	1.52	9.90	37.88	11.42	57.10	47.10	-19.22	-35.68	P			
4	0.5540	25.28	10.55	9.90	35.18	20.45	56.00	46.00	-20.82	-25.55	P			
5	2.1260	27.38	5.90	10.00	37.38	15.90	56.00	46.00	-18.62	-30.10	P			
6	3.6300	27.25	12.90	10.00	37.25	22.90	56.00	46.00	-18.75	-23.10	P			

Neutral line:

00.0 dBuV

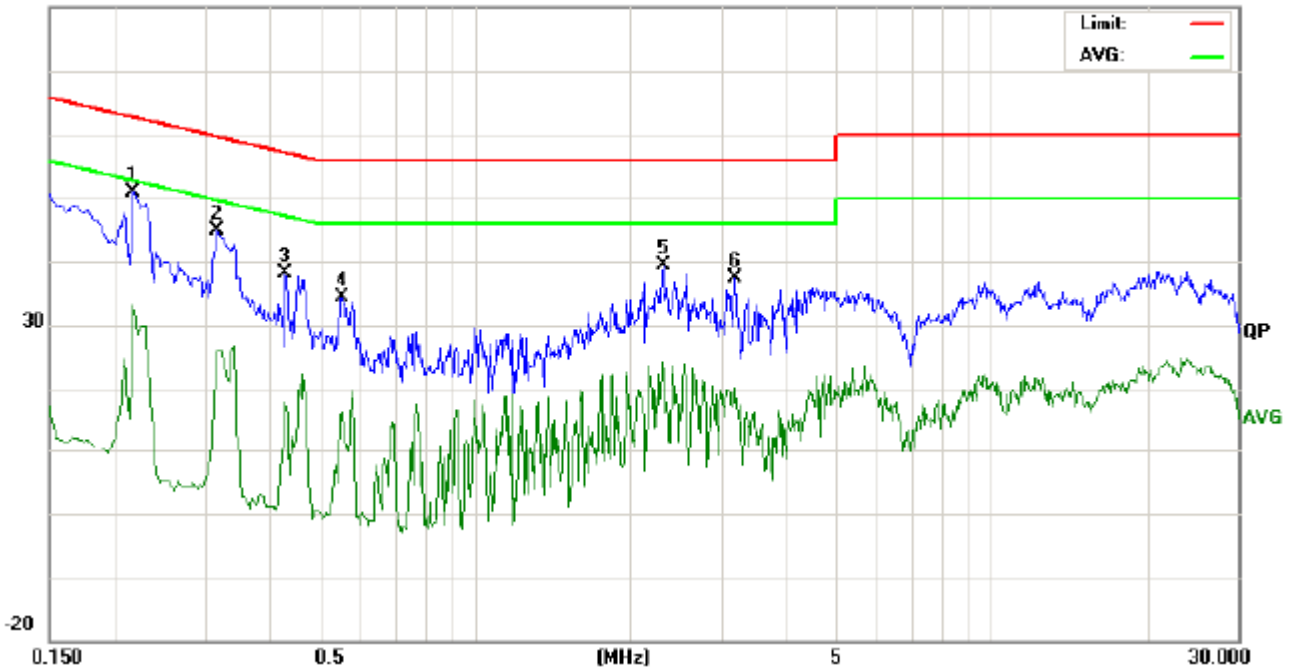

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2180		41.14	23.34	9.80	50.94	33.14	62.89	52.89	-11.95	-19.75	P		
2	0.3180		34.94	16.04	9.82	44.76	25.86	59.76	49.76	-15.00	-23.90	P		
3	0.4300		28.30	7.95	9.90	38.20	17.85	57.25	47.25	-19.05	-29.40	P		
4	0.5540		24.44	6.55	9.90	34.34	16.45	56.00	46.00	-21.66	-29.55	P		
5	2.3140		29.36	12.63	10.00	39.36	22.63	56.00	46.00	-16.64	-23.37	P		
6	3.1860		27.46	10.23	10.00	37.46	20.23	56.00	46.00	-18.54	-25.77	P		

Notes:


1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

Appendix H): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120kHz</td> <td>300kHz</td> <td>Quasi-peak</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average</td> </tr> </tbody> </table>	Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak	Above 1GHz	Peak	1MHz	3MHz	Peak	Peak	1MHz	10Hz	Average	
Frequency	Detector	RBW	VBW	Remark																	
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak																	
Above 1GHz	Peak	1MHz	3MHz	Peak																	
	Peak	1MHz	10Hz	Average																	
Test Procedure:	<p>Below 1GHz test procedure as below:</p> <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel <p>Above 1GHz test procedure as below:</p> <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. 																				
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBμV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>40.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>43.5</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>46.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>54.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>54.0</td> <td>Average Value</td> </tr> <tr> <td>74.0</td> <td>Peak Value</td> </tr> </tbody> </table>	Frequency	Limit (dB μ V/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	74.0	Peak Value
Frequency	Limit (dB μ V/m @3m)	Remark																			
30MHz-88MHz	40.0	Quasi-peak Value																			
88MHz-216MHz	43.5	Quasi-peak Value																			
216MHz-960MHz	46.0	Quasi-peak Value																			
960MHz-1GHz	54.0	Quasi-peak Value																			
Above 1GHz	54.0	Average Value																			
	74.0	Peak Value																			


**Test plot as follows:
Antenna 1**

Worse case mode:	802.11b (11Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

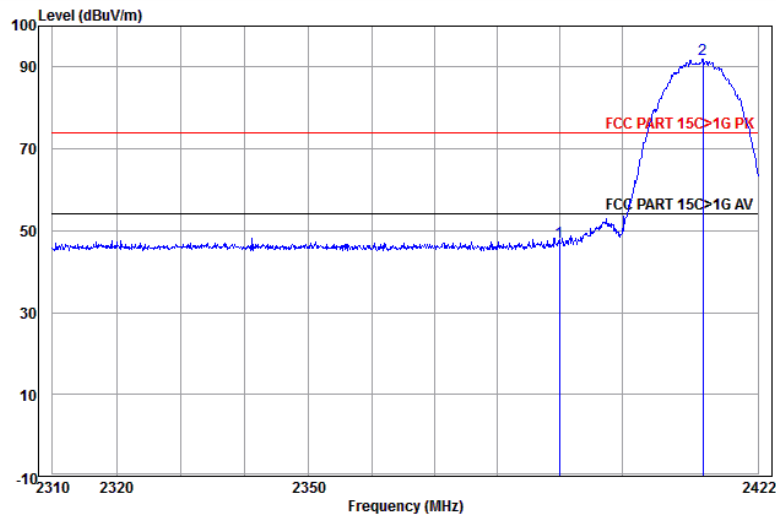


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	3.15	34.39	45.91	47.20	74.00	-26.80	Horizontal
2	2413.072	32.58	3.17	34.39	90.49	91.85	74.00	17.85	Horizontal

Worse case mode:	802.11b (11Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

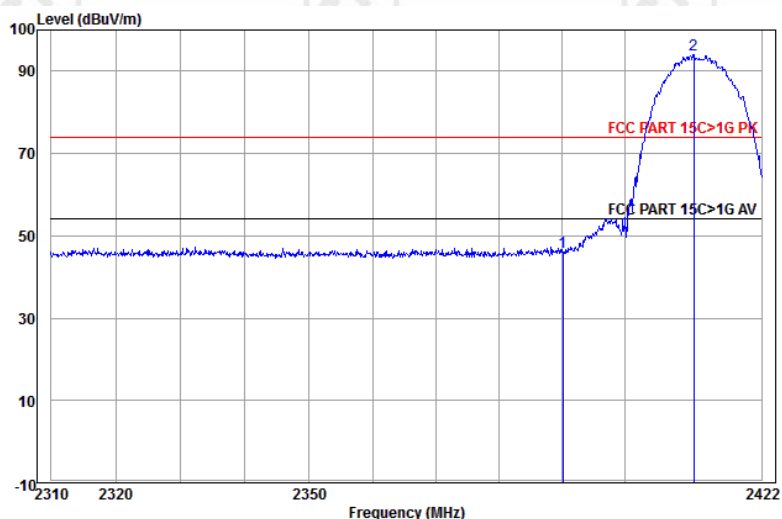


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.104	32.53	3.15	34.39	44.81	46.10	74.00	-27.90	Vertical
2	2411.131	32.58	3.17	34.39	92.57	93.93	74.00	19.93	Vertical

Worse case mode:	802.11b (11Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

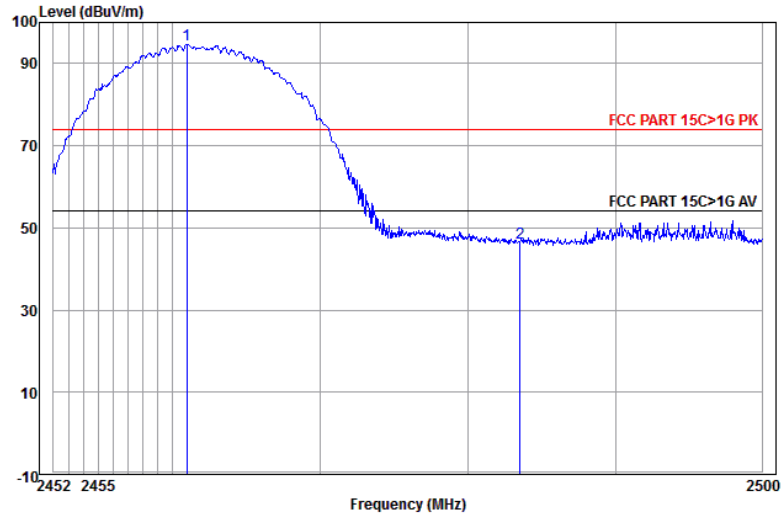


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2460.953	32.67	4.45	34.40	91.93	94.65	74.00	20.65	Horizontal
2	2483.500	32.71	4.51	34.41	43.52	46.33	74.00	-27.67	Horizontal

Worse case mode:	802.11b (11Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

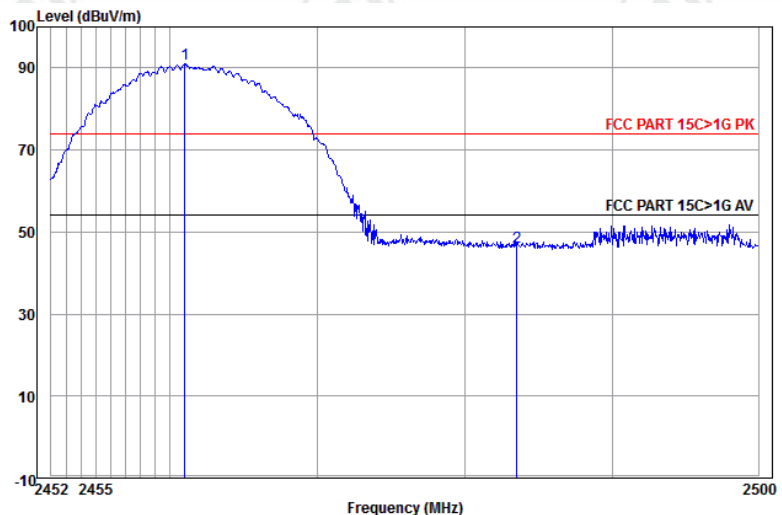


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2461.001	32.67	4.45	34.40	88.21	90.93	74.00	16.93	Vertical
2	2483.500	32.71	4.51	34.41	43.57	46.38	74.00	-27.62	Vertical

Worse case mode:	802.11g (6Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

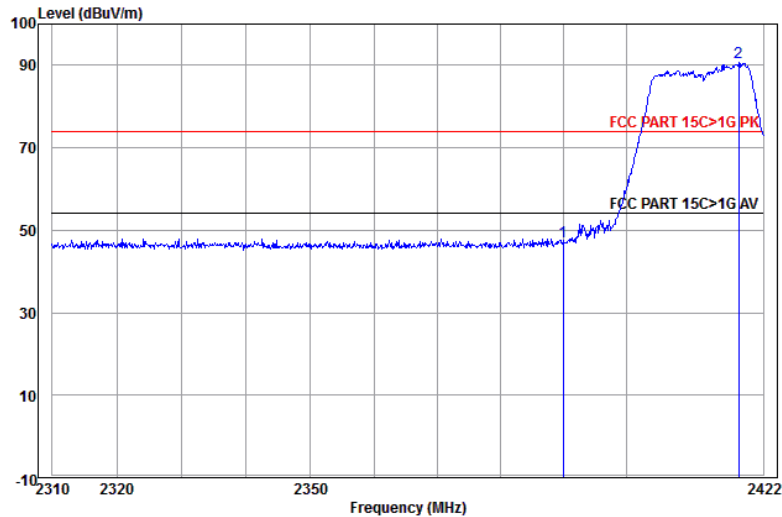


	Ant Freq	Cable Factor	Preamp Loss	Preamp Factor	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	4.28	34.39	44.71	47.13	74.00	-26.87	Horizontal	
2 pp	2418.104	32.59	4.35	34.39	88.23	90.78	74.00	16.78	Horizontal	

Worse case mode:	802.11g (6Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

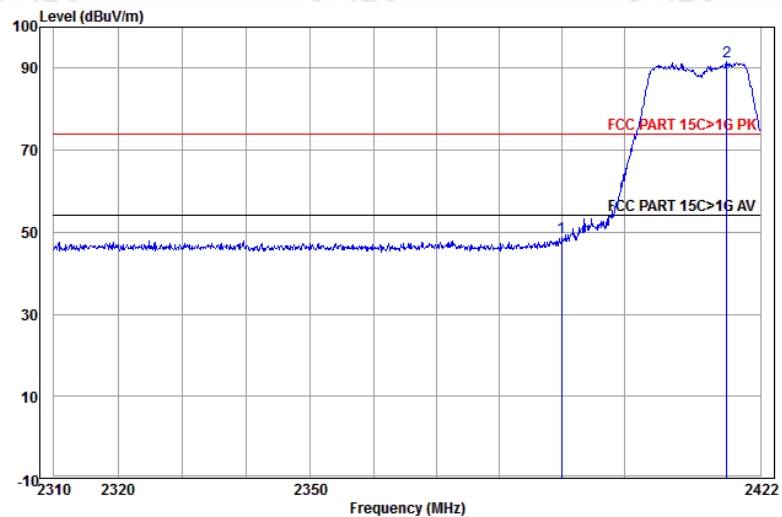


	Ant Freq	Cable Factor	Preamp Loss	Preamp Factor	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	4.28	34.39	46.30	48.72	74.00	-25.28	Vertical	
2 pp	2416.616	32.59	4.35	34.39	89.06	91.61	74.00	17.61	Vertical	

Worse case mode:	802.11g (6Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

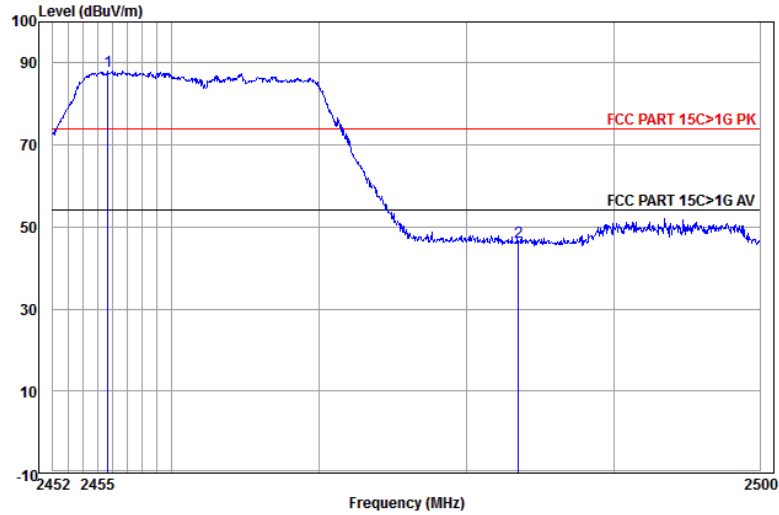


	Ant Freq	Cable Factor	Preamp Loss	Preamp Factor	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2455.711	32.66	4.44	34.40	85.27	87.97	74.00	13.97	Horizontal	
2	2483.500	32.71	4.51	34.41	43.54	46.35	74.00	-27.65	Horizontal	

Worse case mode:	802.11g (6Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

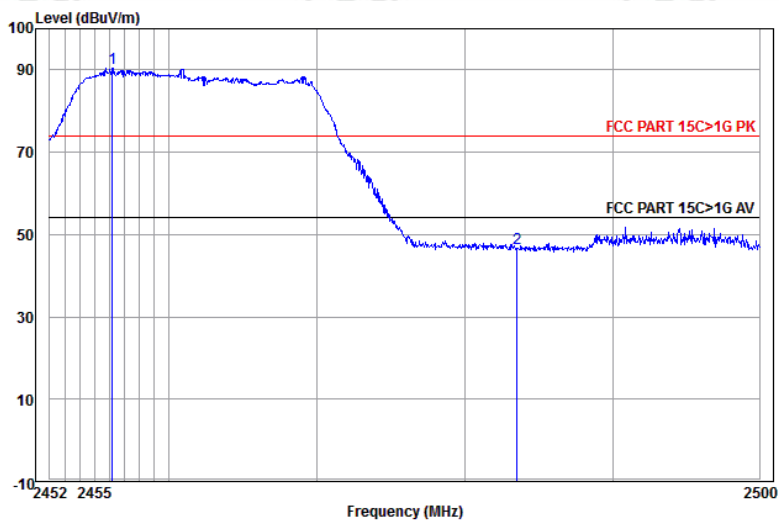


	Ant Freq	Cable Factor	Preamp Loss	Preamp Factor	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2456.187	32.66	4.44	34.40	87.63	90.33	74.00	16.33	Vertical	
2	2483.500	32.71	4.51	34.41	43.70	46.51	74.00	-27.49	Vertical	

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

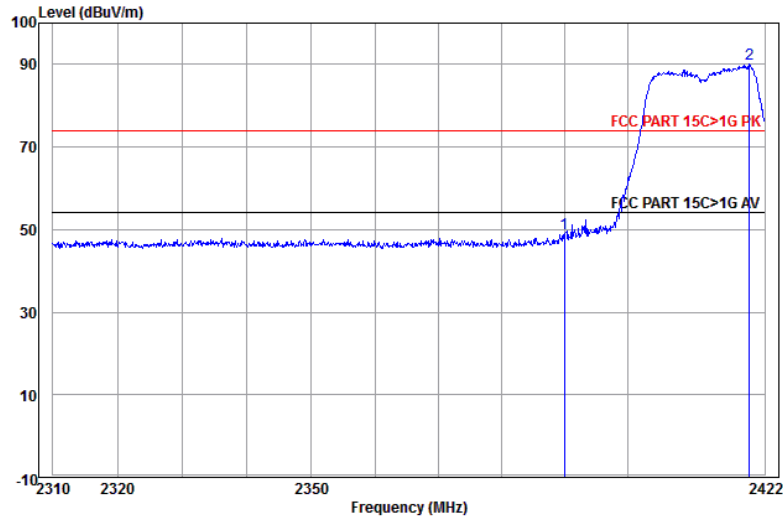


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	4.28	34.39	46.50	48.92	74.00	-25.08	Horizontal
2 pp	2419.593	32.59	4.35	34.39	87.54	90.09	74.00	16.09	Horizontal

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

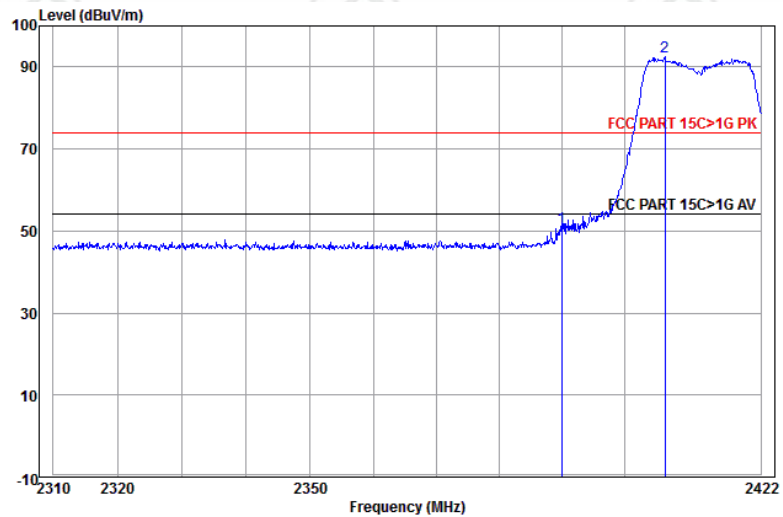


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	4.28	34.39	48.56	50.98	74.00	-23.02	Vertical
2 pp	2406.569	32.57	4.32	34.39	90.01	92.51	74.00	18.51	Vertical

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

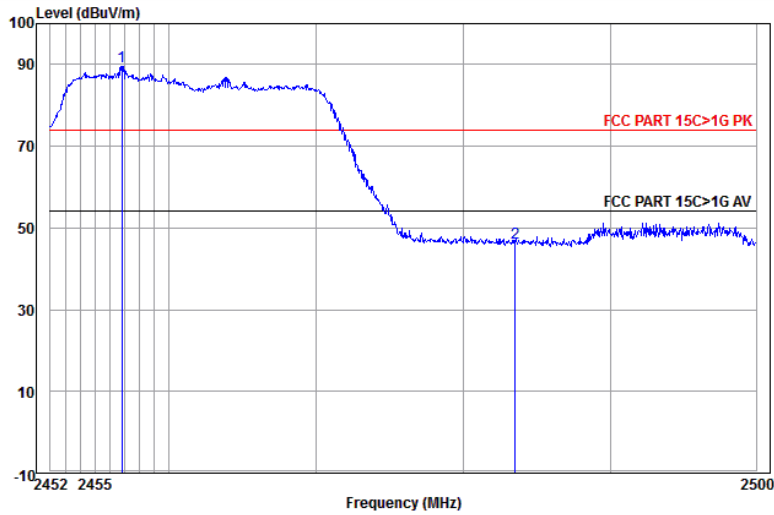


	Ant Freq	Cable Factor	Preamp Loss Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2456.806	32.66	4.44	34.40	86.81	89.51	74.00	15.51	Horizontal
2	2483.500	32.71	4.51	34.41	43.67	46.48	74.00	-27.52	Horizontal

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

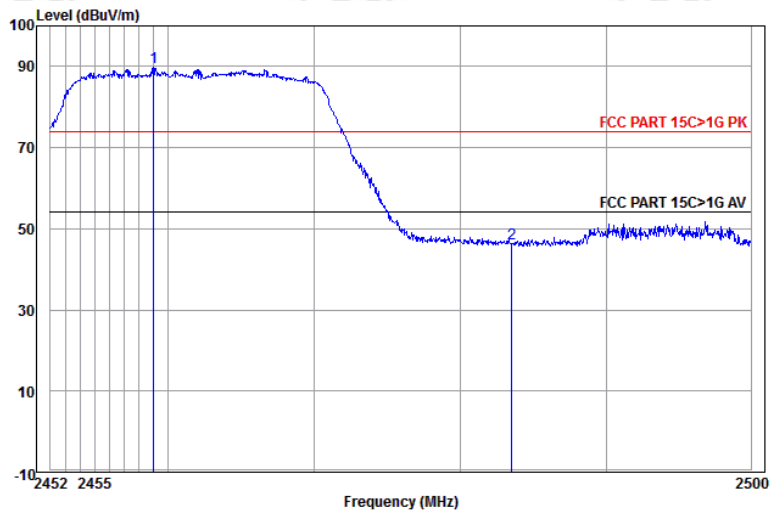


	Ant Freq	Cable Factor	Preamp Loss Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2458.998	32.67	4.45	34.40	86.98	89.70	74.00	15.70	Vertical
2	2483.500	32.71	4.51	34.41	43.64	46.45	74.00	-27.55	Vertical

Worse case mode:	802.11n(HT40) (13..5Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

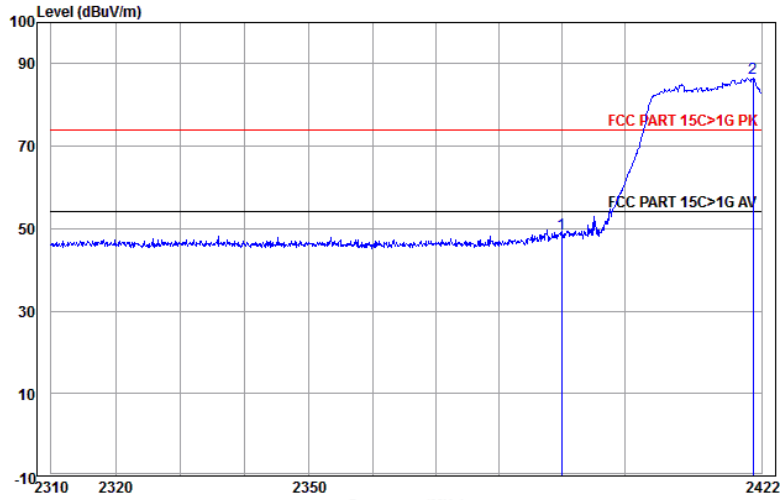


	Ant Freq	Cable Factor	Preamp Loss	Preamp Factor	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	4.28	34.39	46.43	48.85	74.00	-25.15	Horizontal	
2 pp	2420.624	32.59	4.36	34.39	84.07	86.63	74.00	12.63	Horizontal	

Worse case mode:	802.11n(HT40) (13..5Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

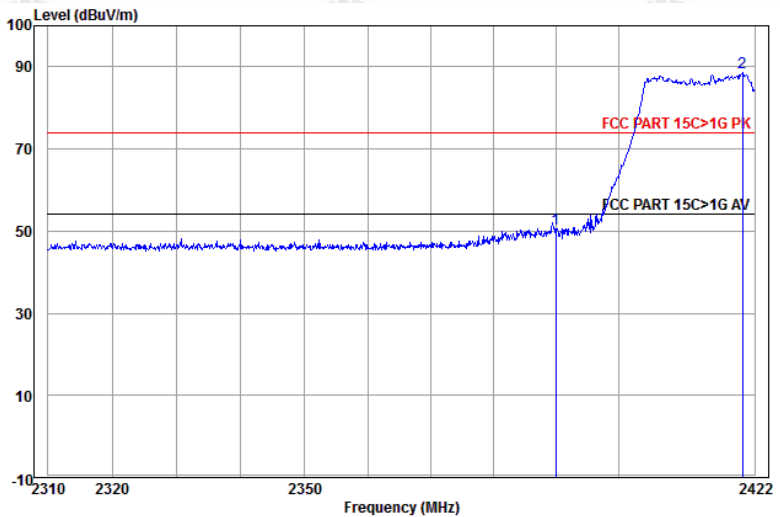


	Ant Freq	Cable Factor	Preamp Loss	Preamp Factor	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	4.28	34.39	48.26	50.68	74.00	-23.32	Vertical	
2 pp	2420.051	32.59	4.35	34.39	85.91	88.46	74.00	14.46	Vertical	

Worse case mode:	802.11n(HT40) (13..5Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

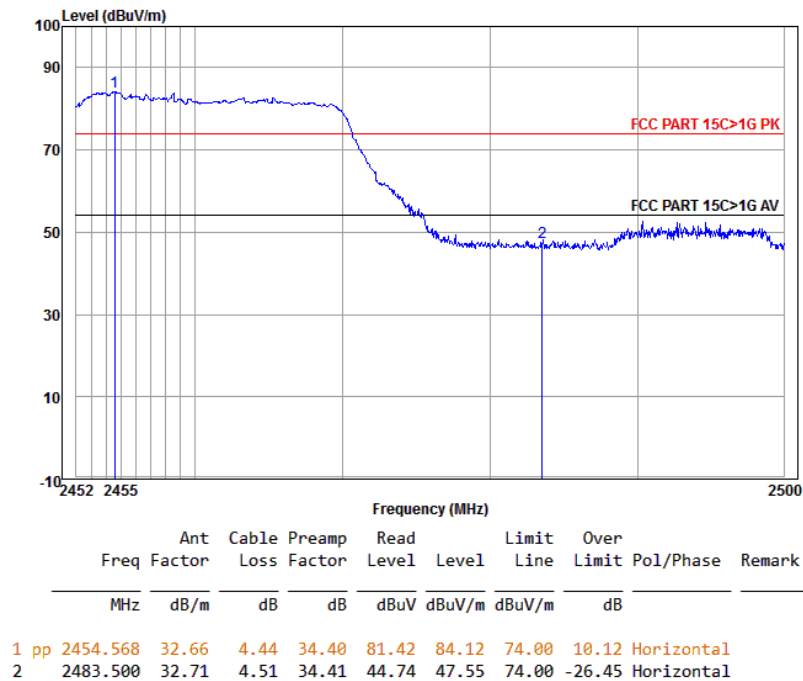

Worse case mode:	802.11n(HT40) (13..5Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

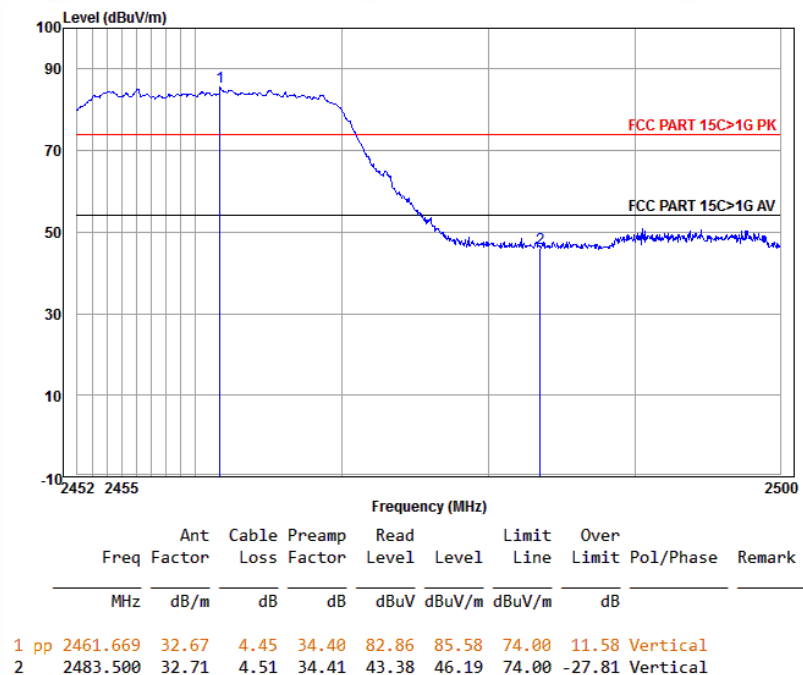

Note:

1) Through Pre-scan transmitting mode with all kind of modulation and data rate, and the 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40),and then Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor


3) All modes and antenna are tested, and found the antenna 1 which is worst case, so only the worst case mode is recorded in the report.

Appendix I): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Test Procedure:					
Below 1GHz test procedure as below:					
<p>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>					
Above 1GHz test procedure as below:					
<p>g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter)..</p> <p>h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p>					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
<p>Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.</p>					


Radiated Spurious Emissions test Data:
Radiated Emission below 1GHz
Antenna 1

30MHz~1GHz (QP)		
Test mode:	Transmitting	Horizontal

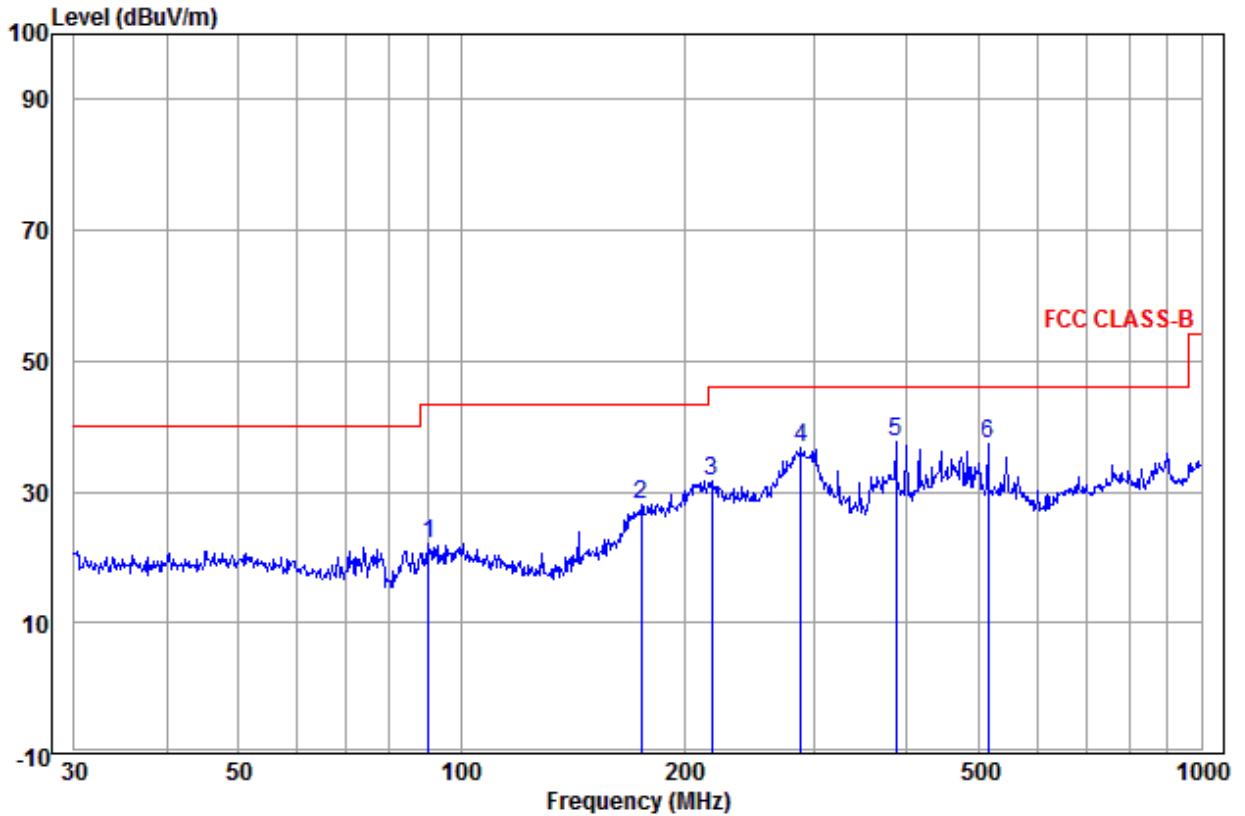

	Ant Freq	Cable Factor	Cable Loss	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dB		
1	90.220	11.25	1.59	9.33	22.17	43.50	-21.33	Horizontal
2	175.037	10.72	1.92	15.30	27.94	43.50	-15.56	Horizontal
3	218.309	11.91	2.26	17.43	31.60	46.00	-14.40	Horizontal
4	287.990	13.25	2.37	21.13	36.75	46.00	-9.25	Horizontal
5 pp	386.634	15.92	2.78	18.97	37.67	46.00	-8.33	Horizontal
6	515.437	18.46	3.16	15.85	37.47	46.00	-8.53	Horizontal

Test mode:	Transmitting	Vertical
------------	--------------	----------

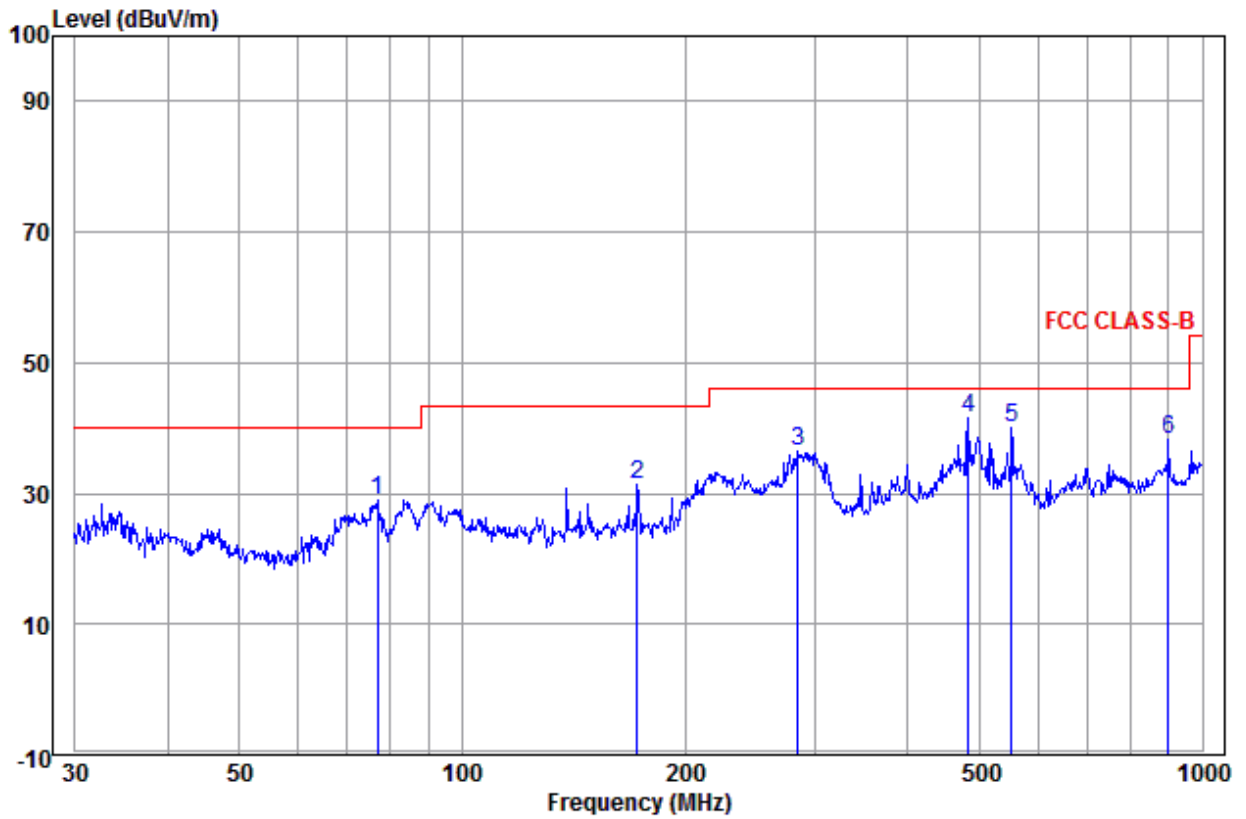

	Ant Freq	Cable Factor	Cable Loss	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	76.781	9.15	1.53	18.36	29.04	40.00	-10.96	Vertical
2	172.599	10.63	1.89	18.71	31.23	43.50	-12.27	Vertical
3	283.979	13.17	2.37	20.88	36.42	46.00	-9.58	Vertical
4 pp	483.910	18.00	3.09	20.48	41.57	46.00	-4.43	Vertical
5	552.883	18.61	3.23	18.13	39.97	46.00	-6.03	Vertical
6	900.147	22.40	4.34	11.64	38.38	46.00	-7.62	Vertical

Note:

1) All modes and antenna are tested, and found the antenna 1 which is worst case, so only the worst case mode is recorded in the report.

Transmitter Emission above 1GHz
Antenna 1

Test mode: 802.11b(11Mbps)			Test Frequency: 2412MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Final test level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1198.095	30.22	2.40	34.97	47.18	44.83	74.00	-29.17	Pass	Horizontal
1367.659	30.60	2.52	34.79	48.18	46.51	74.00	-27.49	Pass	Horizontal
4824.000	34.73	6.72	34.35	43.10	50.20	74.00	-23.80	Pass	Horizontal
5865.832	35.80	6.07	34.30	41.49	49.06	74.00	-24.94	Pass	Horizontal
7236.000	36.42	8.38	34.90	40.57	50.47	74.00	-23.53	Pass	Horizontal
9648.000	37.93	7.63	35.07	36.94	47.43	74.00	-26.57	Pass	Horizontal
1198.095	30.22	2.40	34.97	48.66	46.31	74.00	-27.69	Pass	Vertical
1498.912	30.87	2.60	34.67	50.32	49.12	74.00	-24.88	Pass	Vertical
4824.000	34.73	6.72	34.35	43.42	50.52	74.00	-23.48	Pass	Vertical
6267.190	36.04	6.59	34.47	42.73	50.89	74.00	-23.11	Pass	Vertical
7236.000	36.42	8.38	34.90	40.71	50.61	74.00	-23.39	Pass	Vertical
9648.000	37.93	7.63	35.07	39.00	49.49	74.00	-24.51	Pass	Vertical

Test mode: 802.11b(11Mbps)			Test Frequency: 2437MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Final test level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1198.095	30.22	2.51	34.97	50.39	48.15	74.00	-25.85	Pass	Horizontal
1392.247	30.65	2.72	34.77	50.99	49.59	74.00	-24.41	Pass	Horizontal
4874.000	34.84	5.09	34.33	43.82	49.42	74.00	-24.58	Pass	Horizontal
5895.771	35.82	7.20	34.30	41.63	50.35	74.00	-23.65	Pass	Horizontal
7311.000	36.43	6.76	34.90	40.59	48.88	74.00	-25.12	Pass	Horizontal
9748.000	38.03	7.61	35.05	38.18	48.77	74.00	-25.23	Pass	Horizontal
1360.714	30.59	2.52	34.80	49.87	48.18	74.00	-25.82	Pass	Vertical
1993.395	31.69	2.86	34.30	47.35	47.60	74.00	-26.40	Pass	Vertical
4874.000	34.84	6.73	34.33	42.66	49.90	74.00	-24.10	Pass	Vertical
5880.782	35.81	6.06	34.30	40.70	48.27	74.00	-25.73	Pass	Vertical
7311.000	36.43	8.44	34.90	37.93	47.90	74.00	-26.10	Pass	Vertical
9748.000	38.03	7.55	35.05	39.32	49.85	74.00	-24.15	Pass	Vertical

Test mode: 802.11b(11Mbps)			Test Frequency: 2462MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Final test level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1273.572	30.40	2.60	34.89	50.25	48.36	74.00	-25.64	Pass	Horizontal
1918.716	31.58	3.17	34.35	48.54	48.94	74.00	-25.06	Pass	Horizontal
4924.000	34.94	5.07	34.32	44.41	50.10	74.00	-23.90	Pass	Horizontal
5806.408	35.76	7.00	34.30	42.05	50.51	74.00	-23.49	Pass	Horizontal
7386.000	36.44	6.83	34.90	41.28	49.65	74.00	-24.35	Pass	Horizontal
9848.000	38.14	7.53	35.03	38.43	49.07	74.00	-24.93	Pass	Horizontal
1374.639	30.62	2.71	34.79	46.61	45.15	74.00	-28.85	Pass	Vertical
1968.184	31.65	3.21	34.32	45.31	45.85	74.00	-28.15	Pass	Vertical
4924.000	34.94	5.07	34.32	41.52	47.21	74.00	-26.79	Pass	Vertical
6001.768	35.90	7.43	34.30	41.64	50.67	74.00	-23.33	Pass	Vertical
7386.000	36.44	6.83	34.90	42.07	50.44	74.00	-23.56	Pass	Vertical
9848.000	38.14	7.53	35.03	39.25	49.89	74.00	-24.11	Pass	Vertical

Test mode: 802.11g(6Mbps)			Test Frequency: 2412MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Final test level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1198.095	30.22	2.51	34.97	48.92	46.68	74.00	-27.32	Pass	Horizontal
1597.401	31.05	2.92	34.59	46.19	45.57	74.00	-28.43	Pass	Horizontal
4824.000	34.73	5.10	34.35	41.74	47.22	74.00	-26.78	Pass	Horizontal
5910.798	35.83	7.23	34.30	41.07	49.83	74.00	-24.17	Pass	Horizontal
7236.000	36.42	6.69	34.90	39.79	48.00	74.00	-26.00	Pass	Horizontal
9648.000	37.93	7.70	35.07	37.01	47.57	74.00	-26.43	Pass	Horizontal
1198.095	30.22	2.51	34.97	52.83	50.59	74.00	-23.41	Pass	Vertical
1938.352	31.61	3.19	34.34	49.29	49.75	74.00	-24.25	Pass	Vertical
4824.000	34.73	5.10	34.35	41.86	47.34	74.00	-26.66	Pass	Vertical
5895.771	35.82	7.20	34.30	41.59	50.31	74.00	-23.69	Pass	Vertical
7236.000	36.42	6.69	34.90	38.43	46.64	74.00	-27.36	Pass	Vertical
9648.000	37.93	7.70	35.07	36.98	47.54	74.00	-26.46	Pass	Vertical

Test mode: 802.11g(6Mbps)			Test Frequency: 2437MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Final test level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1098.763	29.97	2.39	35.08	47.33	44.61	74.00	-29.39	Pass	Horizontal
1498.912	30.87	2.83	34.67	47.00	46.03	74.00	-27.97	Pass	Horizontal
4874.000	34.84	5.09	34.33	41.46	47.06	74.00	-26.94	Pass	Horizontal
6494.564	36.16	6.94	34.61	42.04	50.53	74.00	-23.47	Pass	Horizontal
7311.000	36.43	6.76	34.90	39.99	48.28	74.00	-25.72	Pass	Horizontal
9748.000	38.03	7.61	35.05	39.70	50.29	74.00	-23.71	Pass	Horizontal
1182.943	30.18	2.50	34.98	47.72	45.42	74.00	-28.58	Pass	Vertical
3700.260	33.02	5.49	34.57	45.22	49.16	74.00	-24.84	Pass	Vertical
4874.000	34.84	5.09	34.33	43.16	48.76	74.00	-25.24	Pass	Vertical
5865.832	35.80	7.13	34.30	41.58	50.21	74.00	-23.79	Pass	Vertical
7311.000	36.43	6.76	34.90	39.65	47.94	74.00	-26.06	Pass	Vertical
9748.000	38.03	7.61	35.05	36.81	47.40	74.00	-26.60	Pass	Vertical

Test mode: 802.11g(6Mbps)			Test Frequency: 2462MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Final test level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1204.210	30.24	2.52	34.96	46.75	44.55	74.00	-29.45	Pass	Horizontal
1832.785	31.45	3.11	34.41	45.02	45.17	74.00	-28.83	Pass	Horizontal
4924.000	34.94	5.07	34.32	41.49	47.18	74.00	-26.82	Pass	Horizontal
5747.586	35.71	6.87	34.30	42.22	50.50	74.00	-23.50	Pass	Horizontal
7386.000	36.44	6.83	34.90	40.40	48.77	74.00	-25.23	Pass	Horizontal
9848.000	38.14	7.53	35.03	39.29	49.93	74.00	-24.07	Pass	Horizontal
1144.437	30.09	2.45	35.02	48.88	46.40	74.00	-27.60	Pass	Vertical
1593.340	31.04	2.91	34.60	46.35	45.70	74.00	-28.30	Pass	Vertical
4924.000	34.94	5.07	34.32	40.97	46.66	74.00	-27.34	Pass	Vertical
5747.586	35.71	6.87	34.30	42.24	50.52	74.00	-23.48	Pass	Vertical
7386.000	36.44	6.83	34.90	39.15	47.52	74.00	-26.48	Pass	Vertical
9848.000	38.14	7.53	35.03	37.30	47.94	74.00	-26.06	Pass	Vertical

Test mode: 802.11n(HT20)(6.5Mbps)			Test Frequency: 2412MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Final test level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1198.095	30.22	2.51	34.97	48.15	45.91	74.00	-28.09	Pass	Horizontal
1597.401	31.05	2.92	34.59	46.21	45.59	74.00	-28.41	Pass	Horizontal
4824.000	34.73	5.10	34.35	42.43	47.91	74.00	-26.09	Pass	Horizontal
6267.190	36.04	7.16	34.47	40.48	49.21	74.00	-24.79	Pass	Horizontal
7236.000	36.42	6.69	34.90	40.11	48.32	74.00	-25.68	Pass	Horizontal
9648.000	37.93	7.70	35.07	38.21	48.77	74.00	-25.23	Pass	Horizontal
1238.405	30.32	2.56	34.92	49.21	47.17	74.00	-26.83	Pass	Vertical
4223.950	33.36	5.34	34.53	43.80	47.97	74.00	-26.03	Pass	Vertical
4824.000	34.73	5.10	34.35	42.62	48.10	74.00	-25.90	Pass	Vertical
5718.399	35.69	6.80	34.30	41.67	49.86	74.00	-24.14	Pass	Vertical
7236.000	36.42	6.69	34.90	37.86	46.07	74.00	-27.93	Pass	Vertical
9648.000	37.93	7.70	35.07	36.64	47.20	74.00	-26.80	Pass	Vertical

Test mode: 802.11n(HT20)(6.5Mbps)			Test Frequency: 2437MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Final test level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1296.469	30.45	2.62	34.86	46.51	44.72	74.00	-29.28	Pass	Horizontal
1593.340	31.04	2.91	34.60	45.38	44.73	74.00	-29.27	Pass	Horizontal
4874.000	34.84	5.09	34.33	41.66	47.26	74.00	-26.74	Pass	Horizontal
6001.768	35.90	7.43	34.30	40.95	49.98	74.00	-24.02	Pass	Horizontal
7311.000	36.43	6.76	34.90	41.00	49.29	74.00	-24.71	Pass	Horizontal
9748.000	38.03	7.61	35.05	39.16	49.75	74.00	-24.25	Pass	Horizontal
1198.095	30.22	2.51	34.97	51.74	49.50	74.00	-24.50	Pass	Vertical
4191.816	33.28	5.36	34.54	43.68	47.78	74.00	-26.22	Pass	Vertical
4874.000	34.84	5.09	34.33	41.82	47.42	74.00	-26.58	Pass	Vertical
5895.771	35.82	7.20	34.30	41.55	50.27	74.00	-23.73	Pass	Vertical
7311.000	36.43	6.76	34.90	39.35	47.64	74.00	-26.36	Pass	Vertical
9748.000	38.03	7.61	35.05	38.60	49.19	74.00	-24.81	Pass	Vertical

Test mode: 802.11n(HT20)(6.5Mbps)			Test Frequency: 2462MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Final test level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1289.885	30.43	2.62	34.87	46.98	45.16	74.00	-28.84	Pass	Horizontal
1746.251	31.31	3.04	34.48	45.05	44.92	74.00	-29.08	Pass	Horizontal
4924.000	34.94	5.07	34.32	42.11	47.80	74.00	-26.20	Pass	Horizontal
6494.564	36.16	6.94	34.61	41.90	50.39	74.00	-23.61	Pass	Horizontal
7386.000	36.44	6.83	34.90	40.14	48.51	74.00	-25.49	Pass	Horizontal
9848.000	38.14	7.53	35.03	37.72	48.36	74.00	-25.64	Pass	Horizontal
1198.095	30.22	2.51	34.97	48.72	46.48	74.00	-27.52	Pass	Vertical
1884.829	31.53	3.15	34.38	46.35	46.65	74.00	-27.35	Pass	Vertical
4924.000	34.94	5.07	34.32	42.00	47.69	74.00	-26.31	Pass	Vertical
6156.505	35.98	7.27	34.40	40.17	49.02	74.00	-24.98	Pass	Vertical
7386.000	36.44	6.83	34.90	39.35	47.72	74.00	-26.28	Pass	Vertical
9848.000	38.14	7.53	35.03	37.03	47.67	74.00	-26.33	Pass	Vertical

Test mode: 802.11n(HT40)(13.5Mbps)			Test Frequency: 2422MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Final test level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1167.982	30.15	2.48	35.00	46.83	44.46	74.00	-29.54	Pass	Horizontal
1795.839	31.39	3.08	34.44	44.97	45.00	74.00	-29.00	Pass	Horizontal
4844.000	34.77	5.10	34.34	41.37	46.90	74.00	-27.10	Pass	Horizontal
6187.929	36.00	7.24	34.42	39.90	48.72	74.00	-25.28	Pass	Horizontal
7266.000	36.43	6.72	34.90	38.63	46.88	74.00	-27.12	Pass	Horizontal
9688.000	37.97	7.66	35.06	37.51	48.08	74.00	-25.92	Pass	Horizontal
1167.982	30.15	2.48	35.00	49.22	46.85	74.00	-27.15	Pass	Vertical
1818.842	31.43	3.10	34.42	46.70	46.81	74.00	-27.19	Pass	Vertical
4844.000	34.77	5.10	34.34	41.60	47.13	74.00	-26.87	Pass	Vertical
5971.290	35.88	7.37	34.30	40.45	49.40	74.00	-24.60	Pass	Vertical
7266.000	36.43	6.72	34.90	38.58	46.83	74.00	-27.17	Pass	Vertical
9688.000	37.97	7.66	35.06	36.55	47.12	74.00	-26.88	Pass	Vertical

Test mode: 802.11n(HT40)(13.5Mbps)				Test Frequency: 2437MHz			Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Final test level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1360.714	30.59	2.69	34.80	46.73	45.21	74.00	-28.79	Pass	Horizontal
1958.189	31.64	3.20	34.33	45.85	46.36	74.00	-27.64	Pass	Horizontal
4874.000	34.84	5.09	34.33	41.91	47.51	74.00	-26.49	Pass	Horizontal
5776.922	35.73	6.93	34.30	41.76	50.12	74.00	-23.88	Pass	Horizontal
7311.000	36.43	6.76	34.90	38.81	47.10	74.00	-26.90	Pass	Horizontal
9748.000	38.03	7.61	35.05	37.07	47.66	74.00	-26.34	Pass	Horizontal
1198.095	30.22	2.51	34.97	51.03	48.79	74.00	-25.21	Pass	Vertical
1933.424	31.60	3.18	34.34	47.10	47.54	74.00	-26.46	Pass	Vertical
4874.000	34.84	5.09	34.33	41.49	47.09	74.00	-26.91	Pass	Vertical
6235.364	36.02	7.19	34.45	41.09	49.85	74.00	-24.15	Pass	Vertical
7311.000	36.43	6.76	34.90	40.06	48.35	74.00	-25.65	Pass	Vertical
9748.000	38.03	7.61	35.05	37.96	48.55	74.00	-25.45	Pass	Vertical

Test mode: 802.11n(HT40)(13.5Mbps)				Test Frequency: 2452MHz			Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Final test level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1185.958	30.19	2.50	34.98	47.24	44.95	74.00	-29.05	Pass	Horizontal
1755.164	31.32	3.05	34.47	45.45	45.35	74.00	-28.65	Pass	Horizontal
4904.000	34.90	5.07	34.33	41.40	47.04	74.00	-26.96	Pass	Horizontal
5910.798	35.83	7.23	34.30	41.27	50.03	74.00	-23.97	Pass	Horizontal
7356.000	36.44	6.80	34.90	39.44	47.78	74.00	-26.22	Pass	Horizontal
9808.000	38.10	7.56	35.04	38.99	49.61	74.00	-24.39	Pass	Horizontal
1195.049	30.21	2.51	34.97	48.40	46.15	74.00	-27.85	Pass	Vertical
1889.633	31.54	3.15	34.37	49.73	50.05	74.00	-23.95	Pass	Vertical
4904.000	34.90	5.07	34.33	41.27	46.91	74.00	-27.09	Pass	Vertical
6347.466	36.08	7.08	34.52	41.68	50.32	74.00	-23.68	Pass	Vertical
7356.000	36.44	6.80	34.90	38.54	46.88	74.00	-27.12	Pass	Vertical
9808.000	38.10	7.56	35.04	36.91	47.53	74.00	-26.47	Pass	Vertical

Note:

1) Through Pre-scan transmitter mode with all kind of modulation and data rate, find the 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40),and then Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading - Correct Factor


Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

3) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.


4) All modes and antenna are tested, and found the antenna 1 which is worst case, so only the worst case mode is recorded in the report.

PHOTOGRAPHS OF TEST SETUP

Test Model No.: DC29

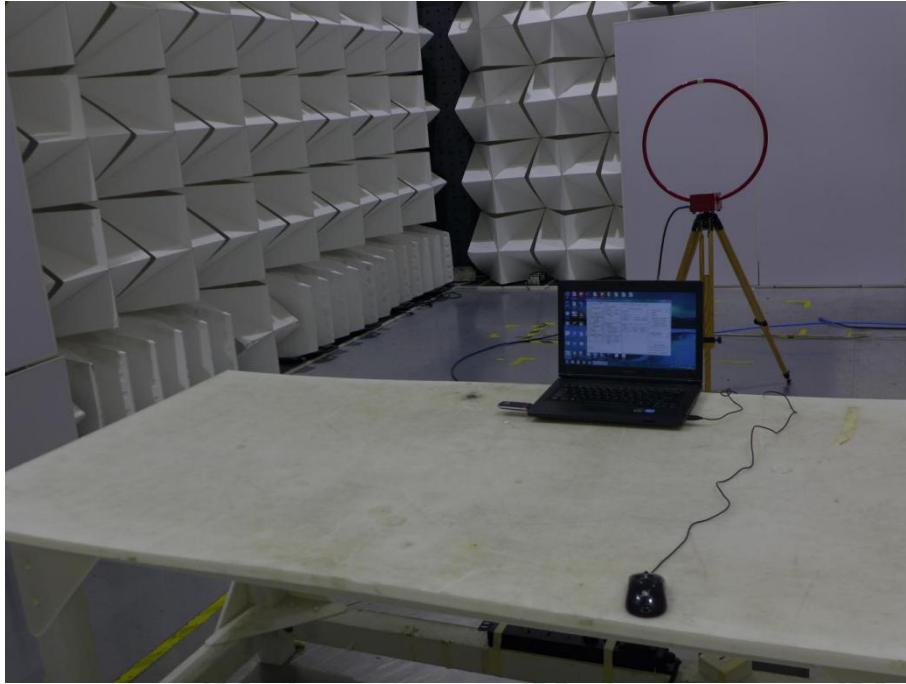

Radiated spurious emission Test Setup-1(Below 30MHz)

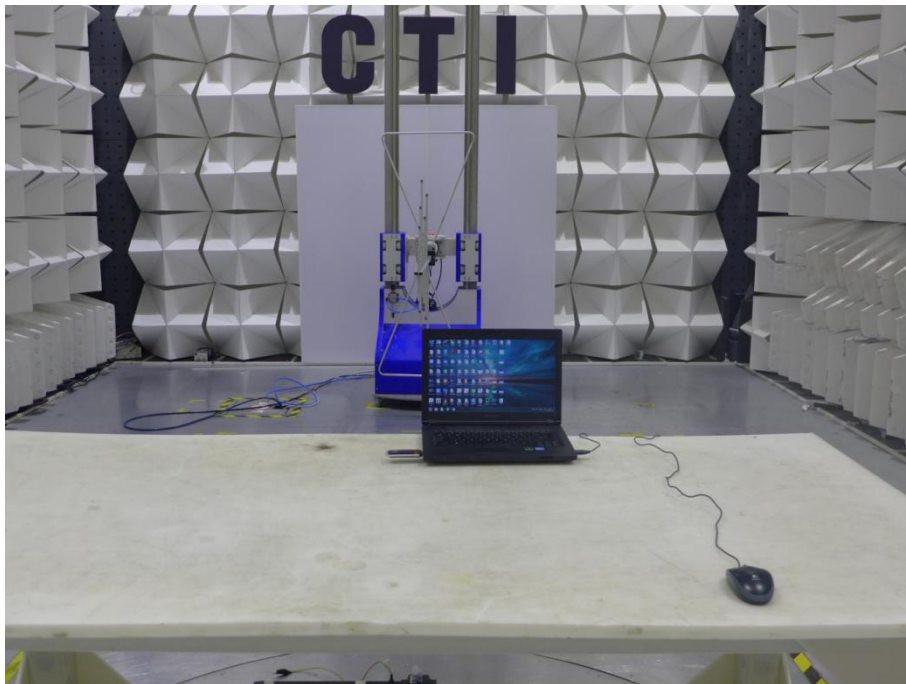

Radiated spurious emission Test Setup-2(Below 1GHz)



Radiated spurious emission Test Setup-3(Above 1GHz)



Conducted Emissions Test Setup

PHOTOGRAPHS OF EUT Constructional Details


Test Model No.: DC29




View of Product-1



View of Product-2

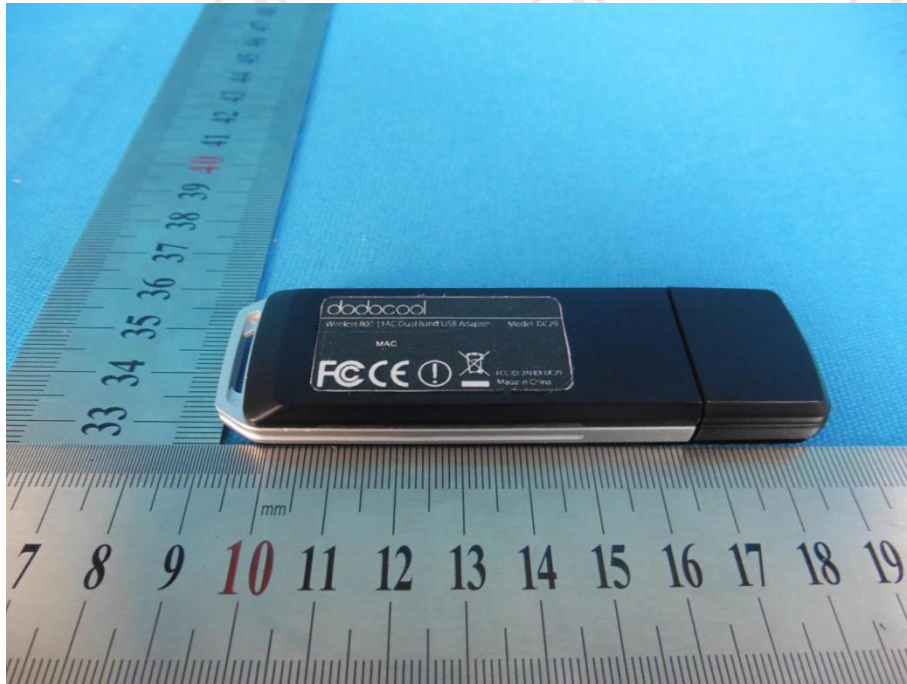


View of Product-3

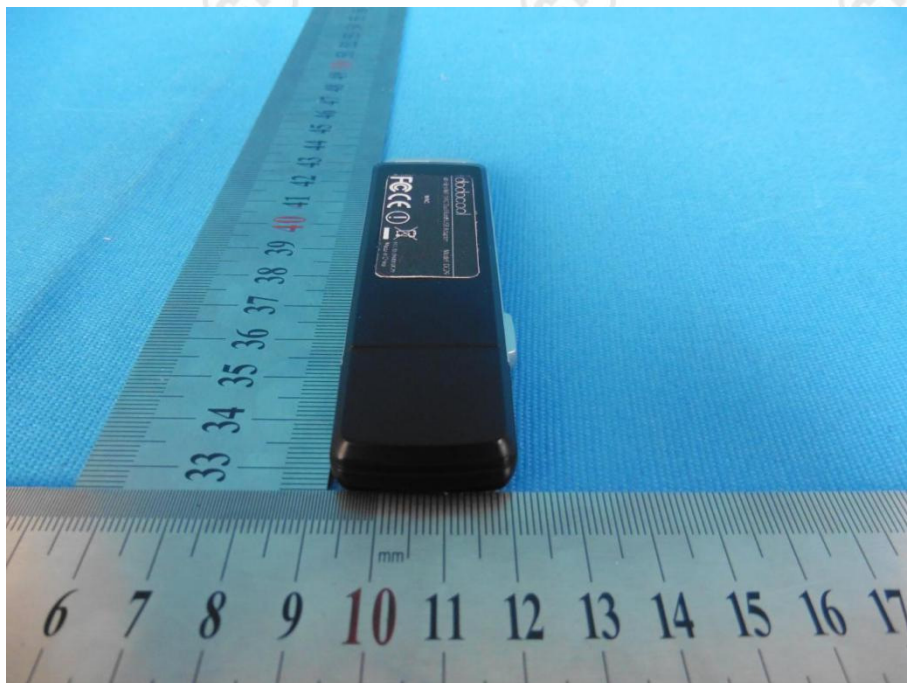


View of Product-4



View of Product-5

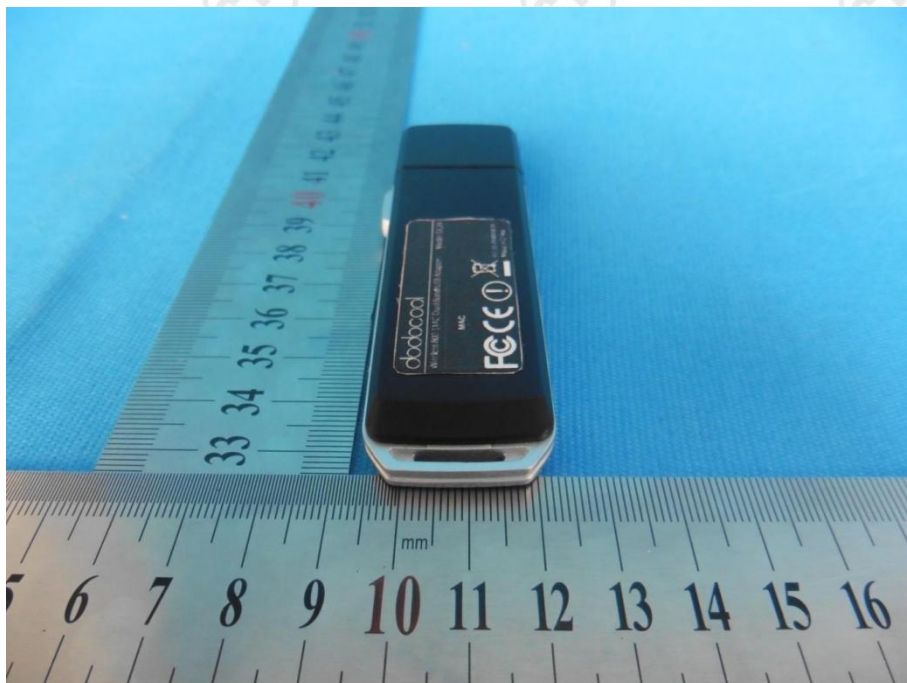

View of Product-6

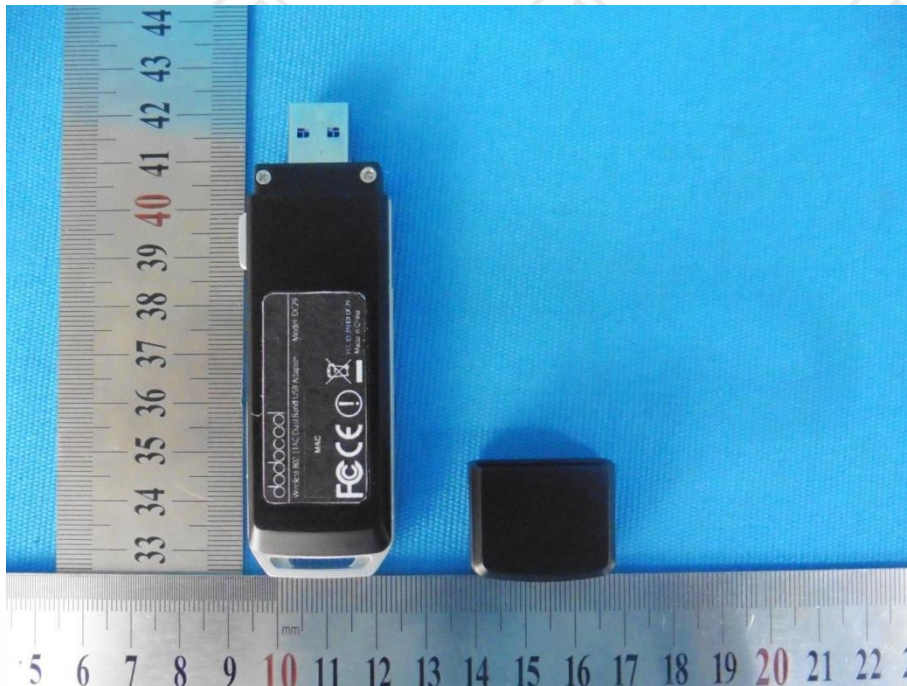


View of Product-7



View of Product-8



View of Product-9

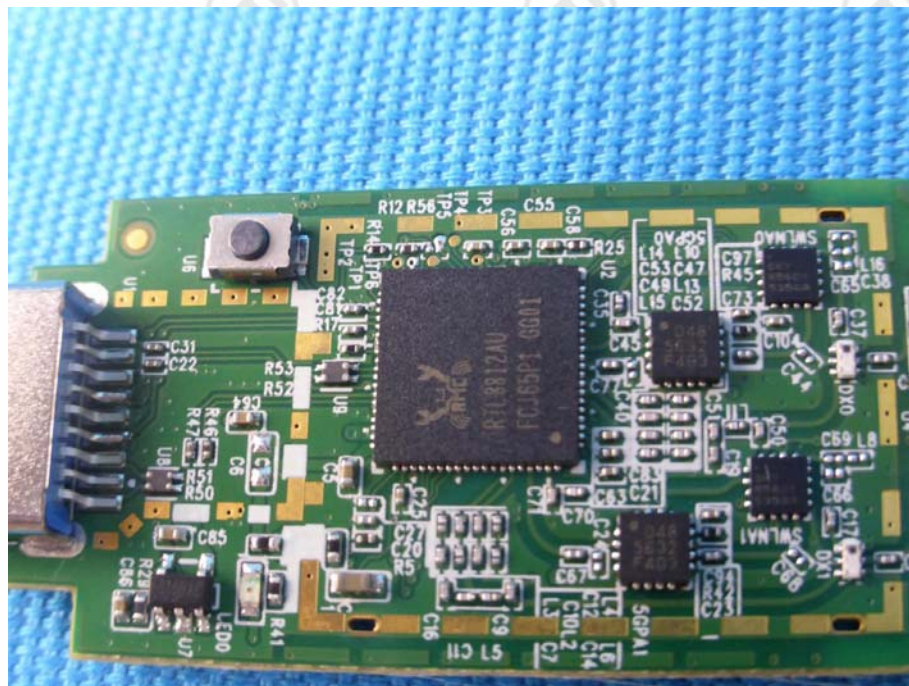

View of Product-10

