

# FCC TEST REPORT

## FCC ID: 2AHDI-LS1

Product	:	Koogeek Smart Light Strip
Model Name	:	LS1
Brand	:	N/A
Report No.	:	PTCDQ06170801001E-FC01
<b>Prepared for</b>		
Shenzhen TOMTOP Technology Co., Ltd		
G-4 Zone 5/F, No.1 Exchange Square, Huanan City, Pinghu Town, Longgang Dist, Shenzhen, China		
<b>Prepared by</b>		
Dongguan Precise Testing & Certification Corp., Ltd.		
Building D, Baoding Technology Park, Guangming Road 2, Guangming Community, Dongcheng District, Dongguan, Guangdong, China		



# 1 TEST RESULT CERTIFICATION

Applicant's name : Shenzhen TOMTOP Technology Co., Ltd  
Address : G-4 Zone 5/F, No.1 Exchange Square, Huanan City, Pinghu Town, Longgang Dist, Shenzhen, China  
Manufacture's name : Shenzhen TOMTOP Technology Co., Ltd  
Address : G-4 Zone 5/F, No.1 Exchange Square, Huanan City, Pinghu Town, Longgang Dist, Shenzhen, China  
Product name : Koogeek Smart Light Strip  
Model name : LS1  
Standards : FCC CFR47 Part 15 Section 15.247  
Test procedure : ANSI C63.10:2013  
Test Date : July 09, 2017 to July 11, 2017  
Date of Issue : July 12, 2017  
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Testing Engineer

August Qiu

Technical Manager

Hack Ye

Authorized Signatory

Chris Du



# Contents

	<b>Page</b>
<b>1 TEST RESULT CERTIFICATION.....</b>	<b>2</b>
<b>2 TEST SUMMARY.....</b>	<b>5</b>
<b>3 GENERAL INFORMATION.....</b>	<b>6</b>
3.1 GENERAL DESCRIPTION OF E.U.T.....	6
3.2 CHANNEL LIST .....	7
3.3 TEST SITE.....	9
<b>4 EQUIPMENT DURING TEST.....</b>	<b>10</b>
4.1 EQUIPMENTS LIST .....	10
4.2 MEASUREMENT UNCERTAINTY .....	12
4.3 DESCRIPTION OF SUPPORT UNITS.....	13
<b>5 CONDUCTED EMISSION.....</b>	<b>14</b>
5.1 E.U.T. OPERATION .....	14
5.2 EUT SETUP .....	14
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	15
5.4 MEASUREMENT PROCEDURE.....	15
5.5 CONDUCTED EMISSION LIMIT.....	15
5.6 MEASUREMENT DESCRIPTION .....	15
5.7 CONDUCTED EMISSION TEST RESULT.....	15
<b>6 RADIATED SPURIOUS EMISSIONS.....</b>	<b>20</b>
6.1 EUT OPERATION.....	20
6.2 TEST SETUP .....	21
6.3 SPECTRUM ANALYZER SETUP .....	22
6.4 TEST PROCEDURE.....	23
6.5 SUMMARY OF TEST RESULTS .....	24
<b>7 CONDUCTED SPURIOUS EMISSION.....</b>	<b>30</b>
7.1 TEST PROCEDURE.....	30
7.2 TEST RESULT .....	30



<b>8</b>	<b>BAND EDGE MEASUREMENT .....</b>	<b>37</b>
8.1	TEST PROCEDURE.....	37
8.2	TEST RESULT .....	38
<b>9</b>	<b>6DB BANDWIDTH MEASUREMENT.....</b>	<b>42</b>
9.1	TEST PROCEDURE.....	42
9.2	TEST RESULT .....	42
<b>10</b>	<b>MAXIMUM PEAK OUTPUT POWER .....</b>	<b>49</b>
10.1	TEST PROCEDURE.....	49
10.2	TEST RESULT .....	49
<b>11</b>	<b>POWER SPECTRAL DENSITY.....</b>	<b>50</b>
11.1	TEST PROCEDURE.....	50
11.2	TEST RESULT .....	50
<b>12</b>	<b>ANTENNA APPLICATION .....</b>	<b>59</b>
12.1	ANTENNA REQUIREMENT .....	59
12.2	RESULT .....	59
<b>13</b>	<b>TEST SETUP .....</b>	<b>60</b>
<b>14</b>	<b>EUT PHOTOS.....</b>	<b>62</b>



## 2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	PASS
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious Emission	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Power Spectral Density	15.247(e)	PASS
Antenna Requirement	15.203	PASS
Remark: N/A: Not Applicable		



### 3 General Information

#### 3.1 General Description of E.U.T.

Product Name	:	Koogeek Smart Light Strip
Model Name	:	LS1
Data Rate	:	802.11 b:1,2,5.5,11Mbps; 802.11 g:6,9,12,18,24,36,48,54Mbps; 802.11n(HT20):MCS0-MCS7; 802.11n(HT40):MCS0-MCS7; 802.11n(HT40):MCS8-MCS15;
Operating frequency	:	2412-2462MHz for 802.11b/g; 2412-2462MHz for 802.11n(HT20); 2422-2452MHz for 802.11n(HT40);
Number of Channels	:	11 channels for 802.11b/g; 11 channels for 802.11n(HT20); 7 channels for 802.11n(HT40);
Type of Modulation	:	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Antenna installation:	:	Internal PCB Antenna
Antenna Gain:	:	2 dBi



### 3.2 Channel List

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20 ): MCS0; 802.11n (HT40 ): MCS8) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11 b/g/n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Frequency and Channel list for 802.11 n (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	8	2447
4	2427	6	2437	9	2452
		7	2442		



Test Frequency and Channel for 802.11 b/g/n (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462

Test Frequency and channel for 802.11 n (HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452





PRECISE TESTING

Report No.: PTCDQ06170801001E-FC01

### **3.3 Test Site**

Dongguan Precise Testing & Certification Corp., Ltd.

Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan, Guangdong,

China, Dongguan, 523129

China

FCC Registration Number: 371540

IC Registration Number: 12191A-1



## 4 Equipment During Test

### 4.1 Equipments List

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Calibration Due
MXG Signal Analyzer	Agilent	N9020A	MY56070279	Apr 7, 18
MIMO4TX-1	/	MIMO4TX	TW5451101	Apr 7, 18
MXG Vector Signal Generator	Agilent	N5182A	MY50143410	Apr 7, 18
MXG Analog Signal Generator	KEYSIGHT	N5181B	MY53050432	Apr 7, 18

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Radiated Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	Sep. 03, 2018
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	Aug 31, 2018
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	Sep. 03, 2018
Spectrum Analyzer	Agilent	E4407B	MY45109572	Oct. 13, 2017
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	Aug. 31, 2018
LOW NOISE AMPLIFIER	ZHINAN	ZN3380C	15002	Sep 03, 2018



PRECISE TESTING

Report No.: PTC DQ06170801001E-FC01

Conducted Emissions

<b>Name of Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Calibration Due</b>
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	Sep. 03, 2018
Artificial Mains Network	Rohde&Schwarz	L2-16B	000WX31025	Sep. 03, 2018
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	Sep. 03, 2018



## 4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 <sup>-6</sup>
Bandwidth	± 1.5 x 10 <sup>-6</sup>
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB



PRECISE TESTING

Report No.: PTCDQ06170801001E-FC01

### 4.3 Description of Support Units

Equipment	Model No.	Series No.
Adapter	NSA12UH-050200 Input: AC 100-240V, 50/60Hz, 0.5A Output: DC 5V, 2A	



## 5 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207  
Test Method: : ANSI C63.10: 2013  
Test Result: : PASS  
Frequency Range: : 150kHz to 30MHz  
Class/Severity: : Class B


### 5.1 E.U.T. Operation

Operating Environment :

Temperature: : 25.5 °C  
Humidity: : 51 % RH  
Atmospheric Pressure: : 101.2kPa  
EUT Operation : : Refer to section 3.3


### 5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

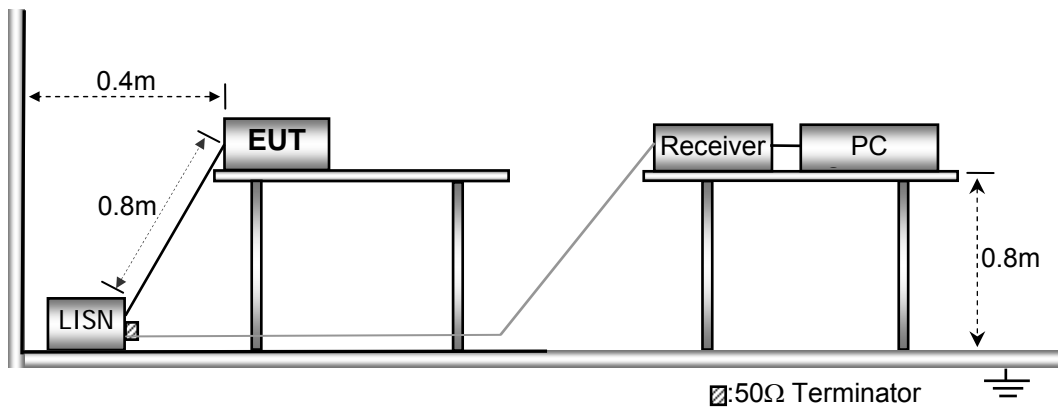



### 5.3 Test SET-UP (Block Diagram of Configuration)

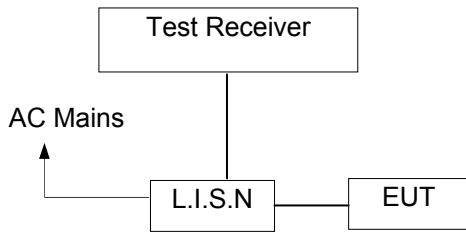

### 5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

### 5.5 Conducted Emission Limit

#### Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

**Note:**

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


### 5.7 Conducted Emission Test Result

Pass.

Please refer to the following pages.



Line-AC 120V/60Hz

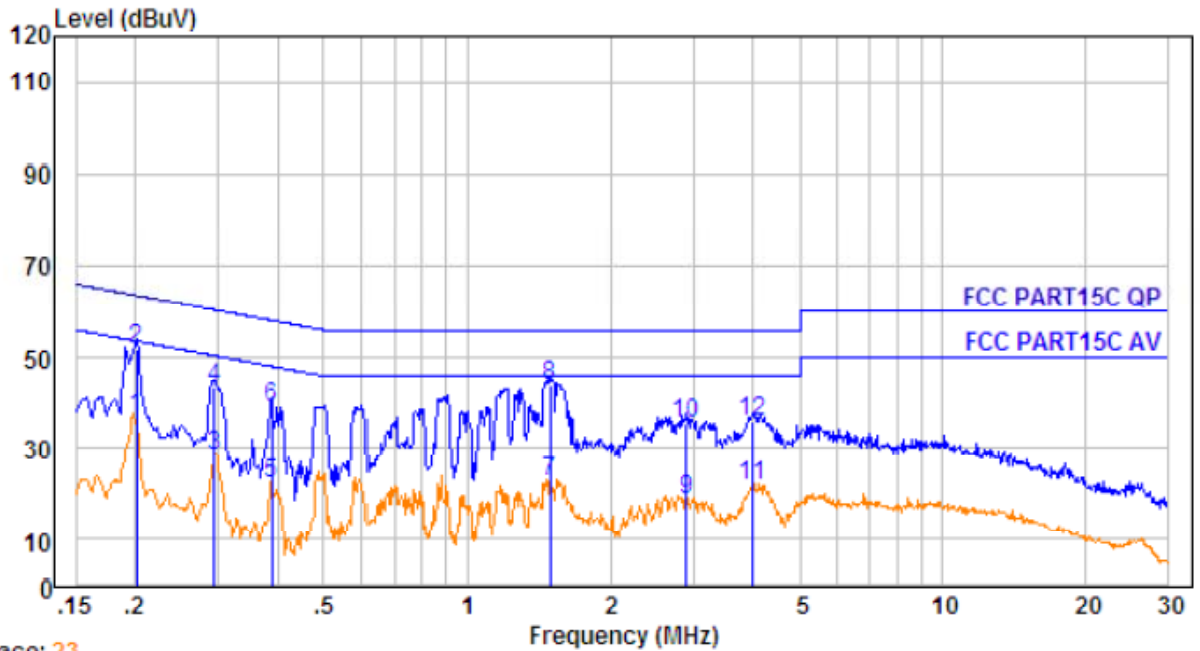


Trace: 23

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.202	0.28	0.15	36.44	36.87	53.54	-16.67	Average
2.	0.202	0.28	0.15	51.44	51.87	63.54	-11.67	QP
3.	0.294	0.37	0.14	27.68	28.19	50.41	-22.22	Average
4.	0.294	0.37	0.14	42.68	43.19	60.41	-17.22	QP
5.	0.389	0.40	0.14	21.44	21.98	48.08	-26.10	Average
6.	0.389	0.40	0.14	38.44	38.98	58.08	-19.10	QP
7.	1.495	0.47	0.15	22.03	22.65	46.00	-23.35	Average
8.	1.495	0.47	0.15	43.03	43.65	56.00	-12.35	QP
9.	2.900	0.47	0.15	17.90	18.52	46.00	-27.48	Average
10.	2.900	0.47	0.15	34.90	35.52	56.00	-20.48	QP
11.	3.985	0.47	0.15	21.22	21.84	46.00	-24.16	Average
12.	3.985	0.47	0.15	35.22	35.84	56.00	-20.16	QP





Neutral-AC 120V/60Hz

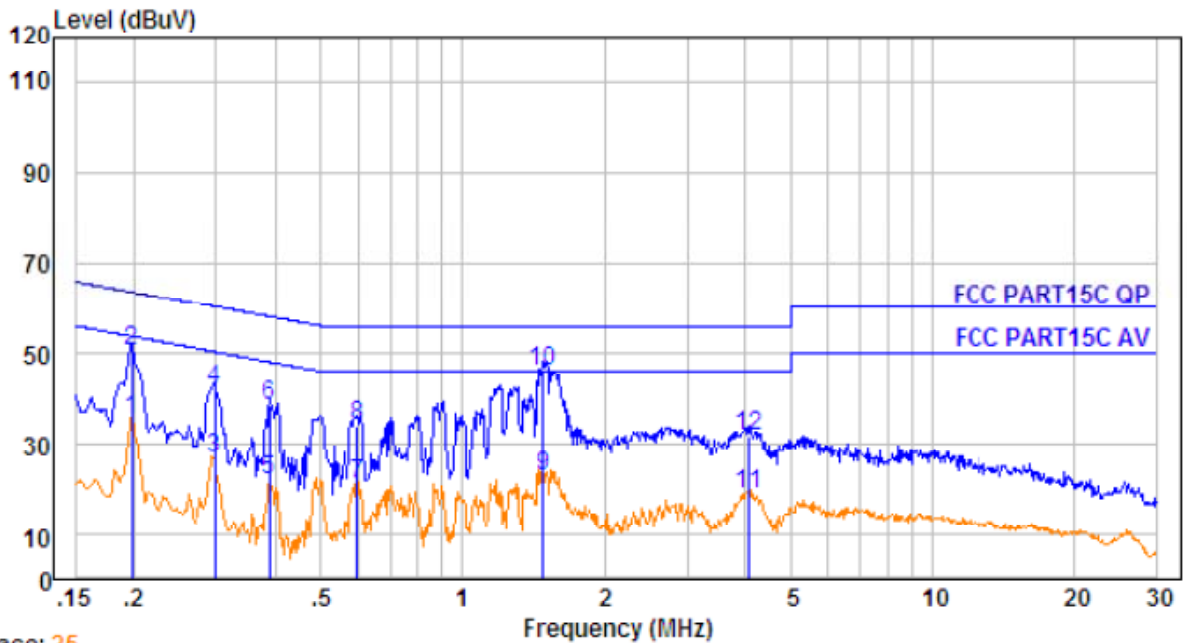


Trace: 25

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBUV	Emission Level dBUV	Limit dBUV	Over Limit dB	Remark
1.	0.198	0.28	0.27	34.78	35.33	53.71	-18.38	Average
2.	0.198	0.28	0.27	49.78	50.33	63.71	-13.38	QP
3.	0.299	0.37	0.27	26.25	26.89	50.28	-23.39	Average
4.	0.299	0.37	0.27	41.25	41.89	60.28	-18.39	QP
5.	0.389	0.40	0.29	21.62	22.31	48.08	-25.77	Average
6.	0.389	0.40	0.29	37.62	38.31	58.08	-19.77	QP
7.	0.595	0.44	0.32	20.41	21.17	46.00	-24.83	Average
8.	0.595	0.44	0.32	33.41	34.17	56.00	-21.83	QP
9.	1.487	0.47	0.36	22.38	23.21	46.00	-22.79	Average
10.	1.487	0.47	0.36	45.38	46.21	56.00	-9.79	QP
11.	4.092	0.47	0.31	18.29	19.07	46.00	-26.93	Average
12.	4.092	0.47	0.31	31.29	32.07	56.00	-23.93	QP



Line-AC 240V/60Hz

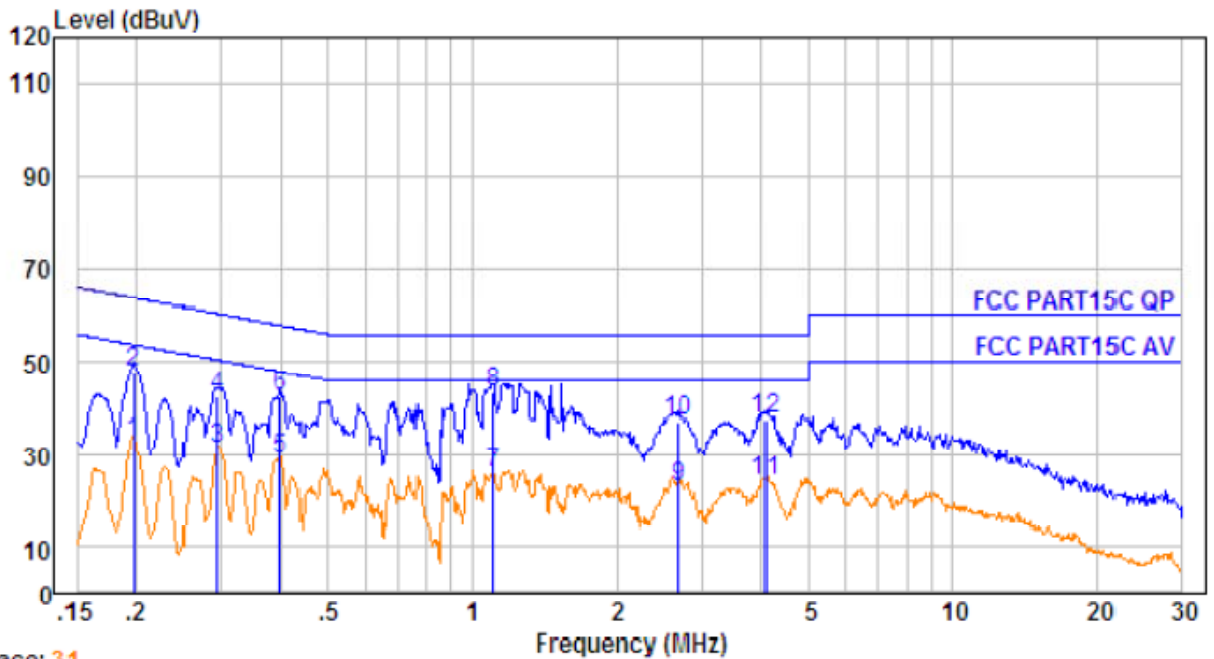


Trace: 31

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBUV	Emission Level dBUV	Limit dBUV	Over Limit dB	Remark
1.	0.198	0.28	0.15	32.52	32.95	53.71	-20.76	Average
2.	0.198	0.28	0.15	47.52	47.95	63.71	-15.76	QP
3.	0.294	0.37	0.14	30.92	31.43	50.41	-18.98	Average
4.	0.294	0.37	0.14	41.92	42.43	60.41	-17.98	QP
5.	0.398	0.40	0.14	28.80	29.34	47.90	-18.56	Average
6.	0.398	0.40	0.14	41.80	42.34	57.90	-15.56	QP
7.	1.106	0.46	0.14	25.62	26.22	46.00	-19.78	Average
8.	1.106	0.46	0.14	42.62	43.22	56.00	-12.78	QP
9.	2.678	0.47	0.15	22.58	23.20	46.00	-22.80	Average
10.	2.678	0.47	0.15	36.58	37.20	56.00	-18.80	QP
11.	4.070	0.47	0.15	23.83	24.45	46.00	-21.55	Average
12.	4.070	0.47	0.15	36.83	37.45	56.00	-18.55	QP



Neutral-AC 240V/60Hz

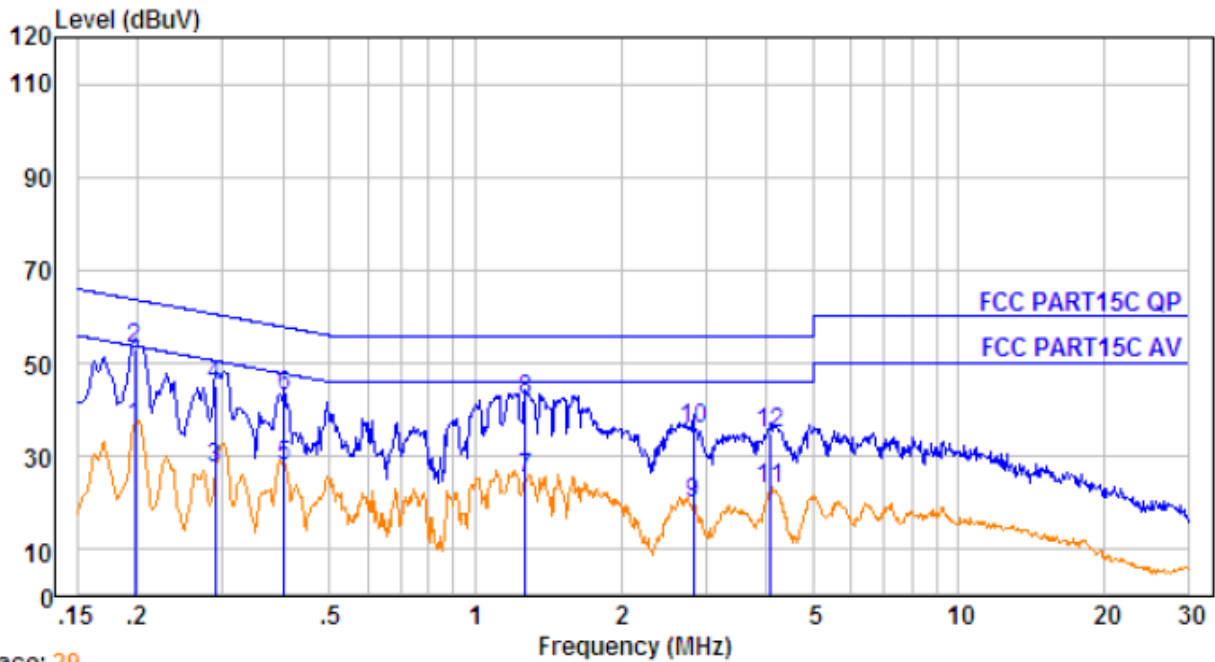

Trace: 29

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBUV	Emission Level dBUV	Limit dBUV	Over Limit dB	Remark
1.	0.198	0.28	0.27	35.79	36.34	53.71	-17.37	Average
2.	0.198	0.28	0.27	52.79	53.34	63.71	-10.37	QP
3.	0.289	0.36	0.27	26.67	27.30	50.54	-23.24	Average
4.	0.289	0.36	0.27	44.67	45.30	60.54	-15.24	QP
5.	0.402	0.40	0.29	27.22	27.91	47.81	-19.90	Average
6.	0.402	0.40	0.29	42.22	42.91	57.81	-14.90	QP
7.	1.269	0.46	0.37	24.45	25.28	46.00	-20.72	Average
8.	1.269	0.46	0.37	41.45	42.28	56.00	-13.72	QP
9.	2.824	0.47	0.33	19.11	19.91	46.00	-26.09	Average
10.	2.824	0.47	0.33	35.11	35.91	56.00	-20.09	QP
11.	4.092	0.47	0.31	22.26	23.04	46.00	-22.96	Average
12.	4.092	0.47	0.31	34.26	35.04	56.00	-20.96	QP



## 6 Radiated Spurious Emissions

Test Requirement: : FCC CFR47 Part 15 Section 15.209 & 15.247  
 Test Method: : ANSI C63.10:2013  
 Test Result: : PASS  
 Measurement Distance: : 3m  
 Limit: : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 6.1 EUT Operation


Operating Environment :

Temperature: : 23.5 °C  
 Humidity: : 51.1 % RH  
 Atmospheric Pressure: : 101.2kPa  
 EUT Operation : : Refer to section 3.3


### 6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

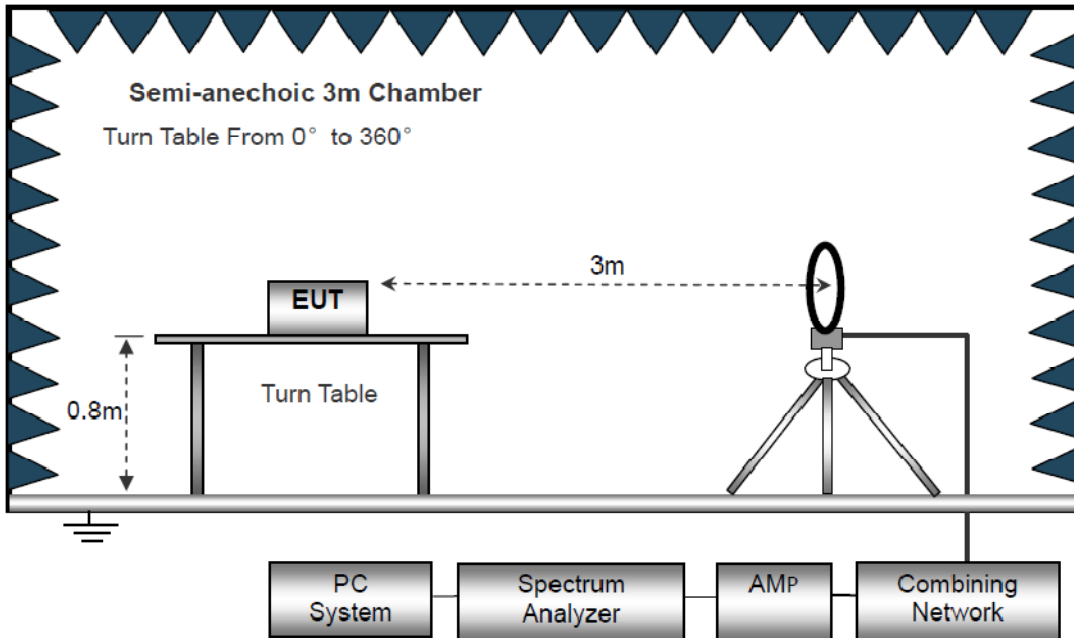

The test setup for emission measurement from 30 MHz to 1 GHz.

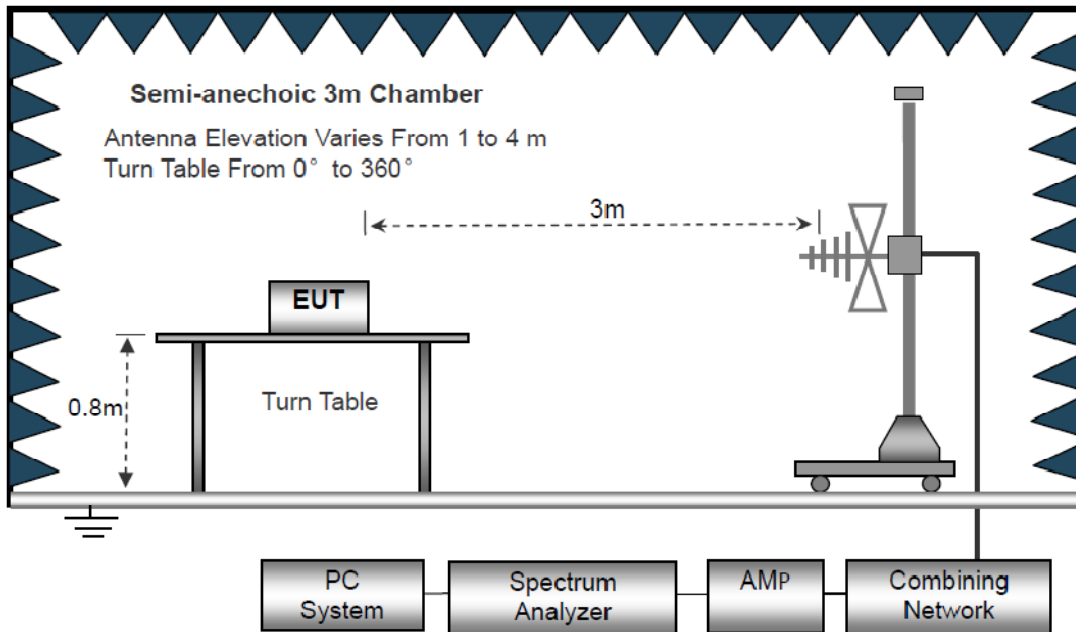

The test setup for emission measurement above 1 GHz

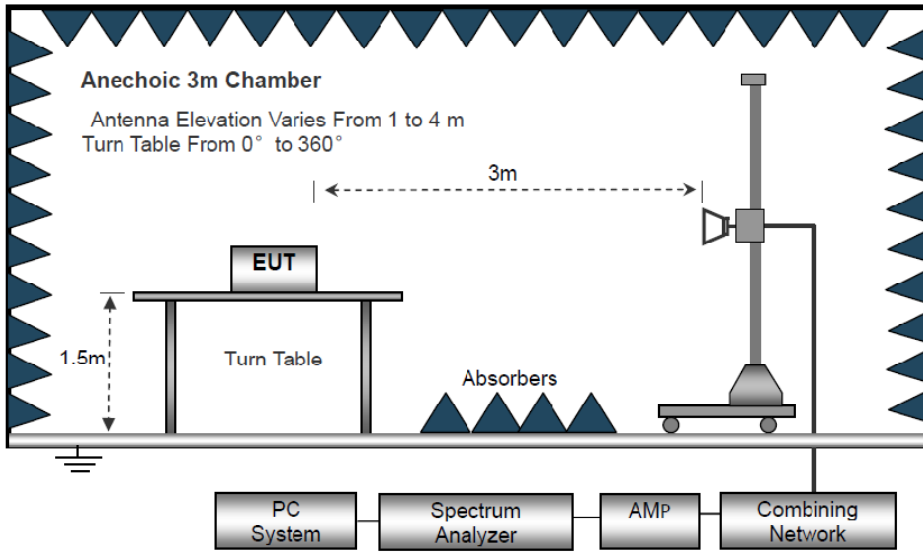

### 6.3 Spectrum Analyzer Setup

Below 30MHz			
IF Bandwidth	:	10kHz	
Resolution Bandwidth	:	10kHz	
Video Bandwidth	:	10kHz	
30MHz ~ 1GHz			
Detector	:	PK	QP
Resolution Bandwidth	:	100kHz	120kHz
Video Bandwidth	:	300kHz	300kHz
Above 1GHz			
Detector	:	PK	AV
Resolution Bandwidth	:	1MHz	1MHz
Video Bandwidth	:	3MHz	10Hz



## 6.4 Test Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane, And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room



### 6.5 Summary of Test Results


#### Test Frequency: Below 30MHz

The measurements were more than 20 dB below the limit and not reported.

#### Test Frequency: 30MHz ~ 1GHz

All applicable test modes have been tested and only the worst case (802.11b TX in middle channel) is recorded.

Antenna Polarization: Horizontal

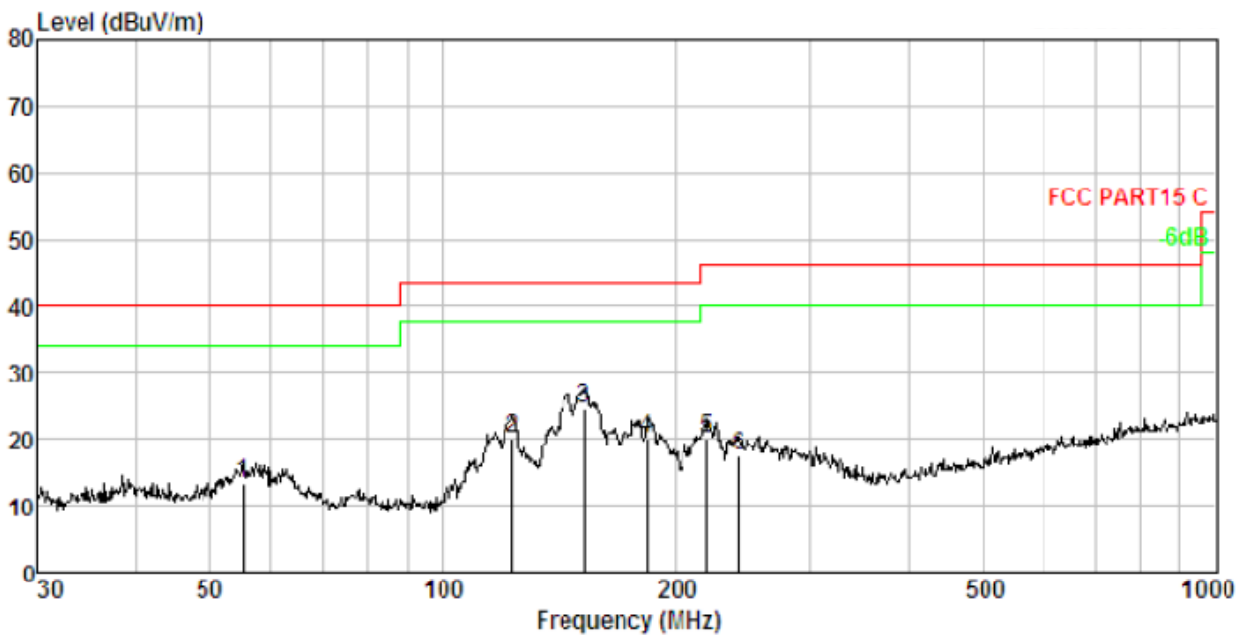

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	55.221	1.61	11.91	29.99	30.18	13.33	40.00	-26.67	QP
2.	123.266	2.33	12.23	36.12	30.46	20.22	43.50	-23.28	QP
3.	152.664	2.53	13.89	38.51	30.54	24.39	43.50	-19.11	QP
4.	183.844	2.70	11.92	36.13	30.60	20.15	43.50	-23.35	QP
5.	219.845	2.86	10.76	37.00	30.66	19.96	46.00	-26.04	QP
6.	241.676	2.94	11.75	33.50	30.70	17.49	46.00	-28.51	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor






PRECISE TESTING

Report No.: PTC DQ06170801001E-FC01

Antenna Polarization: Vertical

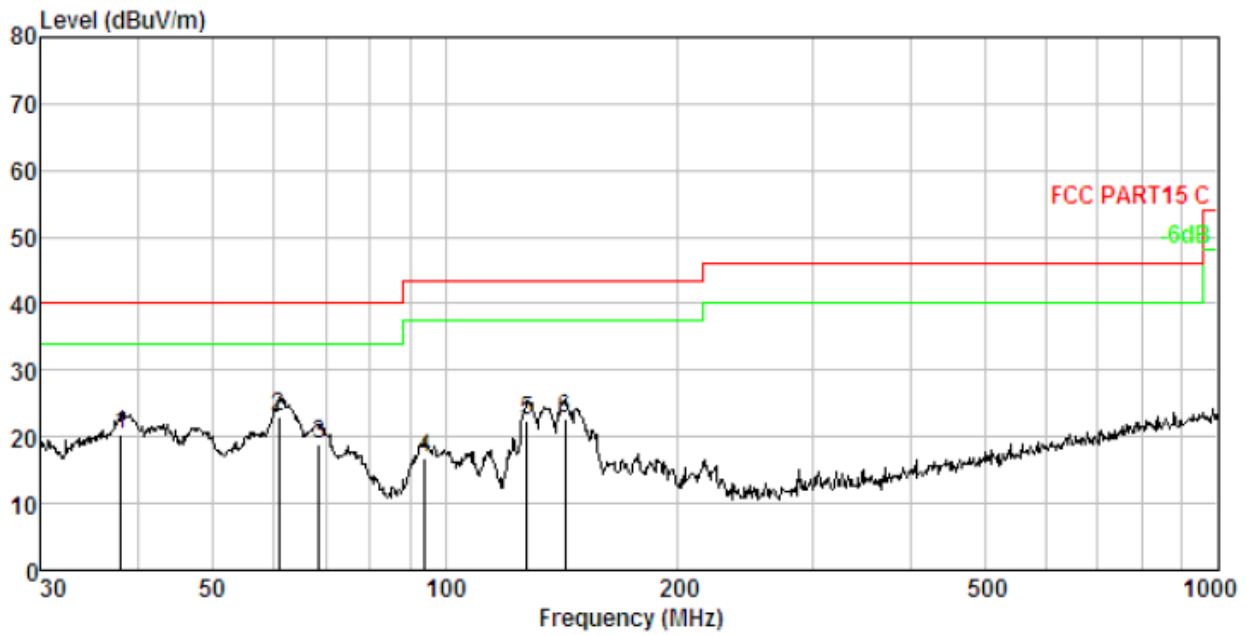

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamplifier Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	38.078	1.27	13.56	35.73	30.05	20.51	40.00	-19.49	QP
2.	60.918	1.70	12.11	39.32	30.22	22.91	40.00	-17.09	QP
3.	68.631	1.80	10.48	36.93	30.26	18.95	40.00	-21.05	QP
4.	94.098	2.09	9.66	35.38	30.37	16.76	43.50	-26.74	QP
5.	127.665	2.37	12.49	37.94	30.47	22.33	43.50	-21.17	QP
6.	142.824	2.47	13.52	37.18	30.51	22.66	43.50	-20.84	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



**Above 1000MHz:**

802.11b Low Channel (2412MHz)

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4824	30.22	AV	V	30.25	7.22	23.45	44.24	54	-9.76
4824	31.24	AV	H	30.25	7.22	23.45	45.26	54	-8.74
4824	33.26	PK	V	30.25	7.22	23.45	47.28	74	-26.72
4824	32.18	PK	H	30.25	7.22	23.45	46.2	74	-27.8
16955	30.6	AV	V	29.75	8.69	30.48	38.56	54	-15.44
16955	28.46	AV	H	29.75	8.69	30.48	36.42	54	-17.58
16955	29.35	PK	V	29.75	8.69	30.48	37.31	74	-36.69
16955	30.59	PK	H	29.75	8.69	30.48	38.55	74	-35.45

802.11b Middle Channel (2437MHz)

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4874	32.14	AV	V	22.66	7.24	23.46	38.58	54	-15.42
4874	33.52	AV	H	22.66	7.24	23.46	39.96	54	-14.04
4874	31.49	PK	V	22.66	7.24	23.46	37.93	74	-36.07
4874	30.26	PK	H	22.66	7.24	23.46	36.7	74	-37.3
17055	34.82	AV	V	24.58	8.72	28.76	39.36	54	-14.64
17055	33.15	AV	H	24.58	8.72	28.76	37.69	54	-16.31
17055	29.56	PK	V	24.58	8.72	28.76	34.1	74	-39.9
17055	30.49	PK	H	24.58	8.72	28.76	35.03	74	-38.97

802.11b High Channel (2462MHz)

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4924	30.42	AV	V	23.22	7.86	19.63	41.87	54	-12.13
4924	31.04	AV	H	23.22	7.86	19.63	42.49	54	-11.51
4924	30.66	PK	V	23.22	7.86	19.63	42.11	74	-31.89
4924	32.48	PK	H	23.22	7.86	19.63	43.93	74	-30.07
17603	29.46	AV	V	31.45	10.25	27.84	43.32	54	-10.68
17603	28.04	AV	H	31.45	10.25	27.84	41.9	54	-12.1
17603	27.46	PK	V	31.45	10.25	27.84	41.32	74	-32.68
17603	28.16	PK	H	31.45	10.25	27.84	42.02	74	-31.98



## 802.11g Low Channel (2412MHz)

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4824	27.06	AV	V	31.25	8.14	22.49	43.96	54	-10.04
4824	28.74	AV	H	31.25	8.14	22.49	45.64	54	-8.36
4824	29.42	PK	V	31.25	8.14	22.49	46.32	74	-27.68
4824	30.24	PK	H	31.25	8.14	22.49	47.14	74	-26.86
16955	33.29	AV	V	27.85	9.58	29.76	40.96	54	-13.04
16955	32.41	AV	H	27.85	9.58	29.76	40.08	54	-13.92
16955	31.06	PK	V	27.85	9.58	29.76	38.73	74	-35.27
16955	30.29	PK	H	27.85	9.58	29.76	37.96	74	-36.04

## 802.11g Middle Channel (2437MHz)

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4874	31	AV	V	20.46	8.49	22.15	37.8	54	-16.2
4874	32.42	AV	H	20.46	8.49	22.15	39.22	54	-14.78
4874	30.69	PK	V	20.46	8.49	22.15	37.49	74	-36.51
4874	29.46	PK	H	20.46	8.49	22.15	36.26	74	-37.74
17055	33.15	AV	V	19.75	9.76	26.56	36.1	54	-17.9
17055	32.06	AV	H	19.75	9.76	26.56	35.01	54	-18.99
17055	30.48	PK	V	19.75	9.76	26.56	33.43	74	-40.57
17055	29.22	PK	H	19.75	9.76	26.56	32.17	74	-41.83

## 802.11g High Channel (2462MHz)

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4924	31.22	AV	V	22.43	8.73	20.43	41.95	54	-12.05
4924	30.43	AV	H	22.43	8.73	20.43	41.16	54	-12.84
4924	29.75	PK	V	22.43	8.73	20.43	40.48	74	-33.52
4924	28.46	PK	H	22.43	8.73	20.43	39.19	74	-34.81
17600	30.44	AV	V	30.26	9.46	30.63	39.53	54	-14.47
17600	31.75	AV	H	30.26	9.46	30.63	40.84	54	-13.16
17600	29.57	PK	V	30.26	9.46	30.63	38.66	74	-35.34
17600	28.46	PK	H	30.26	9.46	30.63	37.55	74	-36.45



802.11n-HT 20 Low Channel (2412MHz)

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4824	26.33	AV	V	30.44	8.55	22.11	43.21	54	-10.79
4824	27.04	AV	H	30.44	8.55	22.11	43.92	54	-10.08
4824	28.46	PK	V	30.44	8.55	22.11	45.34	74	-28.66
4824	29.85	PK	H	30.44	8.55	22.11	46.73	74	-27.27
16876	30.46	AV	V	28.76	9.14	28.76	39.6	54	-14.4
16876	31.26	AV	H	28.76	9.14	28.76	40.4	54	-13.6
16876	30.92	PK	V	28.76	9.14	28.76	40.06	74	-33.94
16876	29.48	PK	H	28.76	9.14	28.76	38.62	74	-35.38

802.11n-HT20 Middle Channel (2437MHz)

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4874	30.44	AV	V	19.75	10.43	20.46	40.16	54	-13.84
4874	31.06	AV	H	19.75	10.43	20.46	40.78	54	-13.22
4874	29.42	PK	V	19.75	10.43	20.46	39.14	74	-34.86
4874	29.62	PK	H	19.75	10.43	20.46	39.34	74	-34.66
17112	30.45	AV	V	21.56	11.05	25.72	37.34	54	-16.66
17112	31.06	AV	H	21.56	11.05	25.72	37.95	54	-16.05
17112	32.92	PK	V	21.56	11.05	25.72	39.81	74	-34.19
17112	29.45	PK	H	21.56	11.05	25.72	36.34	74	-37.66

802.11n-HT20 High Channel (2462MHz)

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4924	30.42	AV	V	21.42	8.96	19.73	41.07	54	-12.93
4924	29.53	AV	H	21.42	8.96	19.73	40.18	54	-13.82
4924	29.15	PK	V	21.42	8.96	19.73	39.8	74	-34.2
4924	30.65	PK	H	21.42	8.96	19.73	41.3	74	-32.7
17588	31.05	AV	V	28.73	10.22	29.75	40.25	54	-13.75
17588	28.46	AV	H	28.73	10.22	29.75	37.66	54	-16.34
17588	27.06	PK	V	28.73	10.22	29.75	36.26	74	-37.74
17588	29.16	PK	H	28.73	10.22	29.75	38.36	74	-35.64



802.11n-HT40 Low Channel (2422MHz)

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4844	27.59	AV	V	29.75	9.43	20.29	46.48	54	-7.52
4844	28.05	AV	H	29.75	9.43	20.29	46.94	54	-7.06
4844	29.16	PK	V	29.75	9.43	20.29	48.05	74	-25.95
4844	30.09	PK	H	29.75	9.43	20.29	48.98	74	-25.02
16795	31.48	AV	V	27.44	10.22	27.4	41.74	54	-12.26
16795	30.22	AV	H	27.44	10.22	27.4	40.48	54	-13.52
16795	28.76	PK	V	27.44	10.22	27.4	39.02	74	-34.98
16795	30.49	PK	H	27.44	10.22	27.4	40.75	74	-33.25

802.11n-HT40 Middle Channel (2437MHz)

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4874	29.42	AV	V	18.46	9.46	19.43	37.91	54	-16.09
4874	30.26	AV	H	18.46	9.46	19.43	38.75	54	-15.25
4874	27.41	PK	V	18.46	9.46	19.43	35.9	74	-38.1
4874	28.06	PK	H	18.46	9.46	19.43	36.55	74	-37.45
17103	31.48	AV	V	20.33	10.22	24.11	37.92	54	-16.08
17103	30.22	AV	H	20.33	10.22	24.11	36.66	54	-17.34
17103	28.49	PK	V	20.33	10.22	24.11	34.93	74	-39.07
17103	29.65	PK	H	20.33	10.22	24.11	36.09	74	-37.91

802.11n-HT40 High Channel (2452MHz)

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4904	29.42	AV	V	20.33	7.59	18.46	38.88	54	-15.12
4904	28.55	AV	H	20.33	7.59	18.46	38.01	54	-15.99
4904	27.46	PK	V	20.33	7.59	18.46	36.92	74	-37.08
4904	30.13	PK	H	20.33	7.59	18.46	39.59	74	-34.41
17436	30.95	AV	V	27.59	9.43	27.59	40.38	54	-13.62
17436	27.46	AV	H	27.59	9.43	27.59	36.89	54	-17.11
17436	28.66	PK	V	27.59	9.43	27.59	38.09	74	-35.91
17436	29.43	PK	H	27.59	9.43	27.59	38.86	74	-35.14

Note: 1. The testing has been conformed to  $10 \times 2480\text{MHz} = 24800\text{MHz}$ .

2. All other emissions more than 30dB below the limit.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
 Emission Level = Reading + Factor  
 Margin=Emission Level-Limit



## 7 Conducted Spurious Emission

Test Requirement	:	FCC CFR47 Part 15 Section 15.247
Test Method	:	ANSI C63.10:2013
Test Limit	:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode	:	Refer to section 3.3


### 7.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold


### 7.2 Test Result

802.11 b


Low Channel

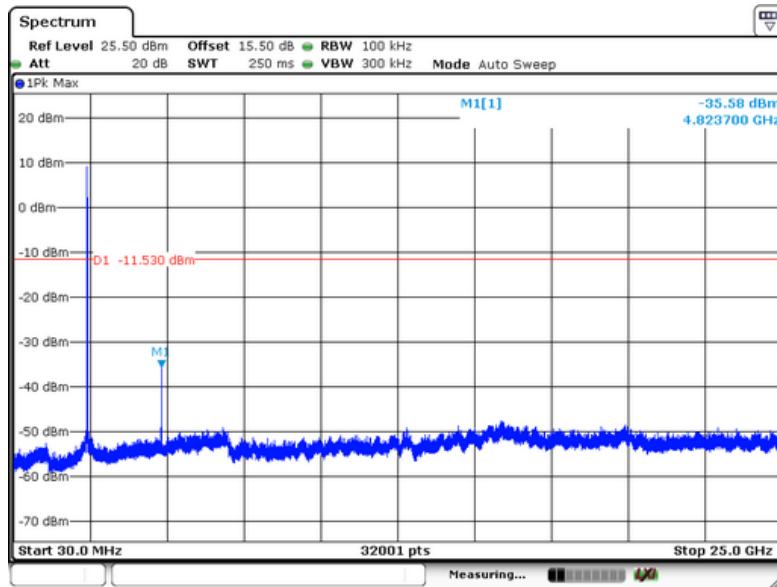

Middle Channel

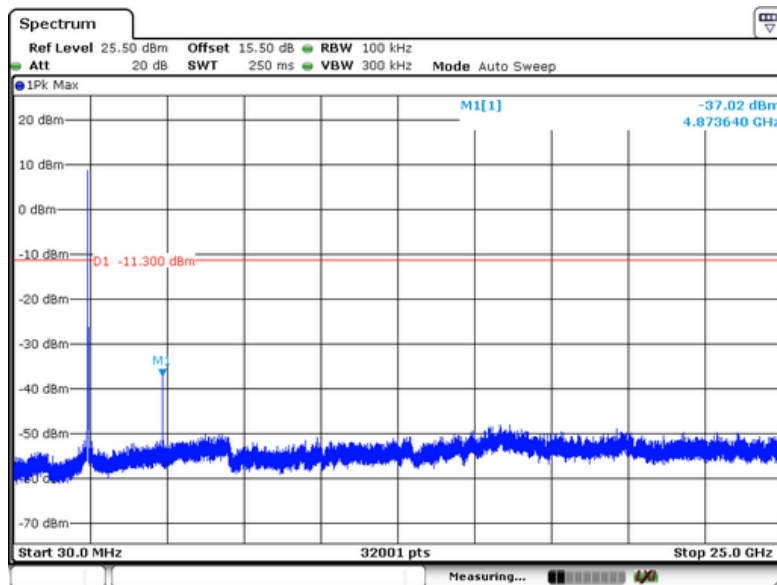


### High Channel

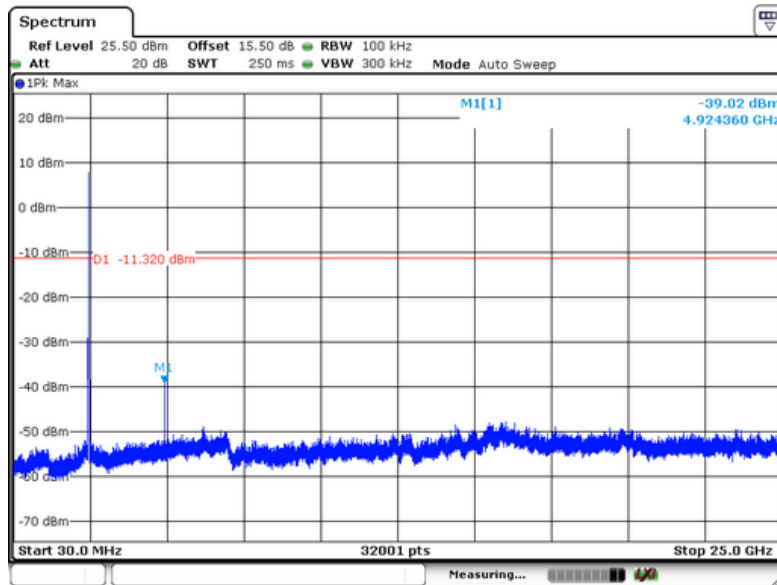


802.11g

### Low Channel

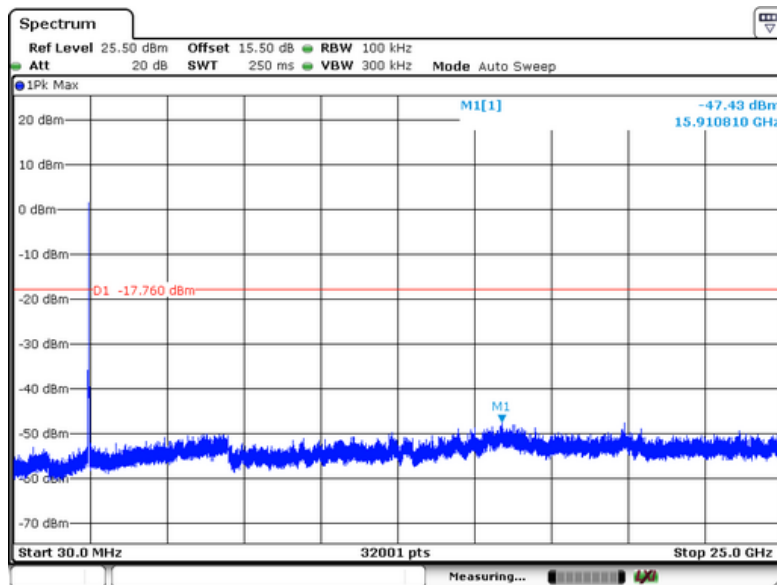




Middle Channel

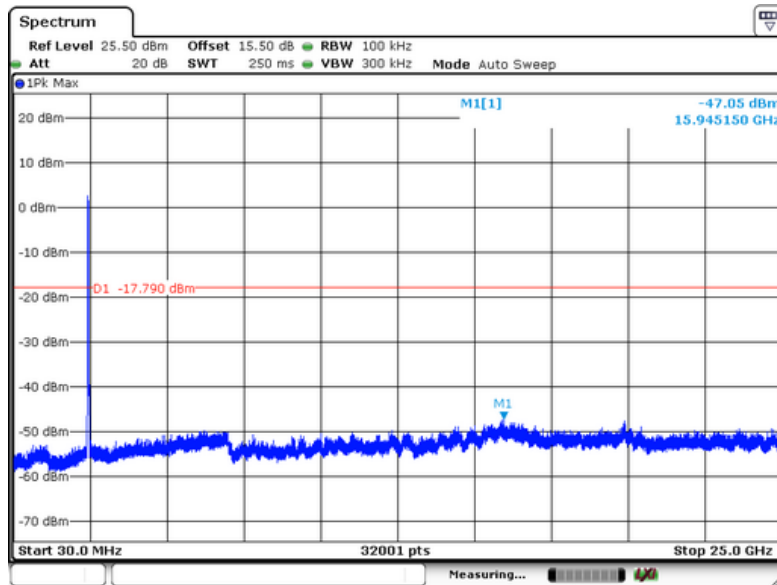


High Channel

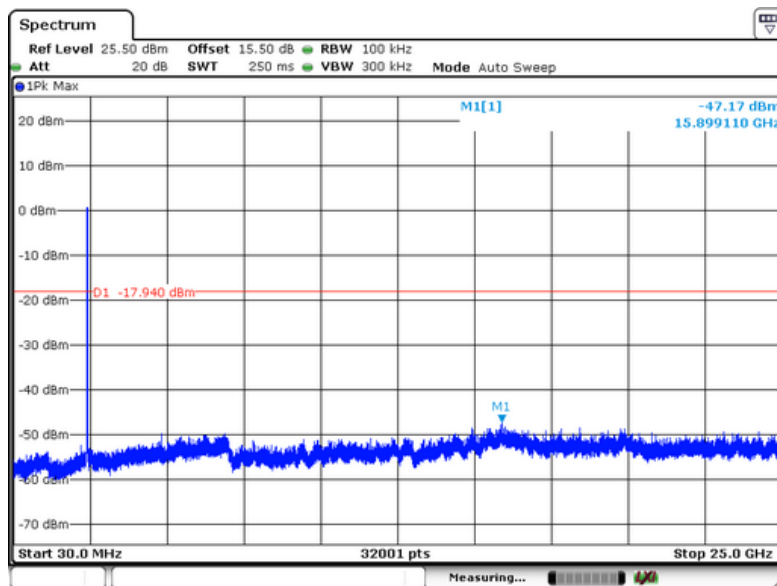


802.11n-HT20


Low Channel

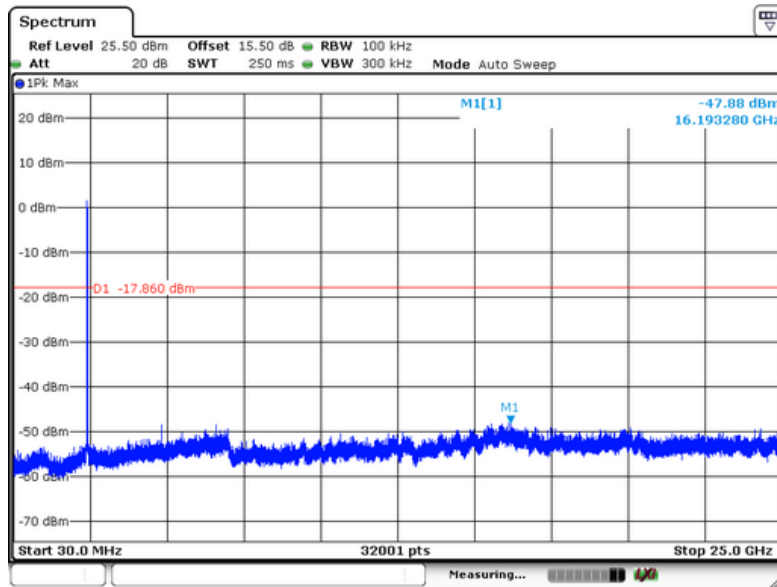

Middle Channel

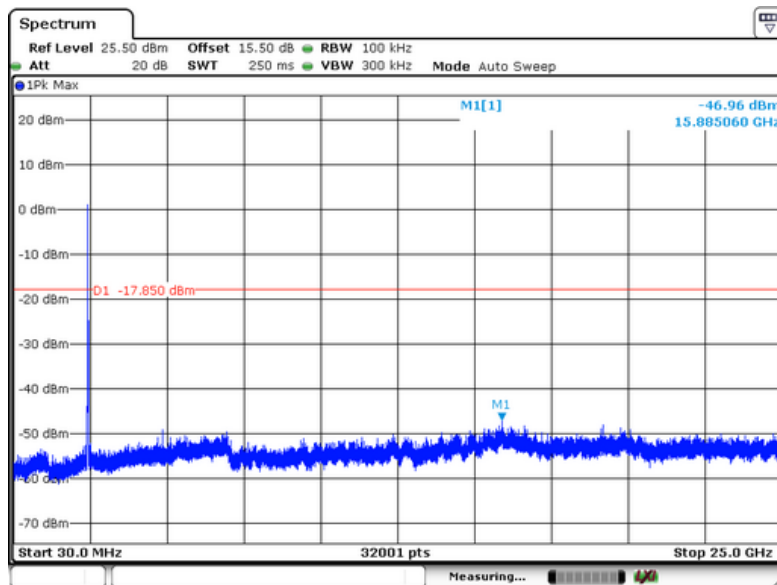


### High Channel

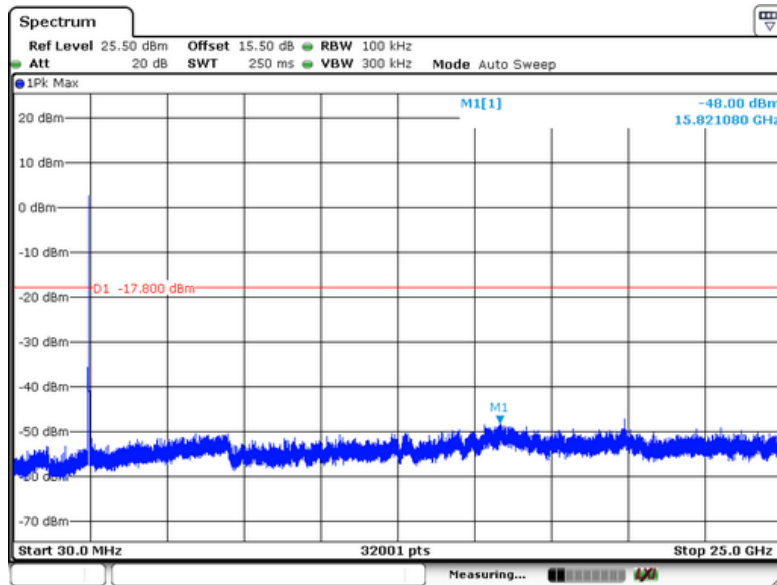


802.11n-HT40


### Low Channel

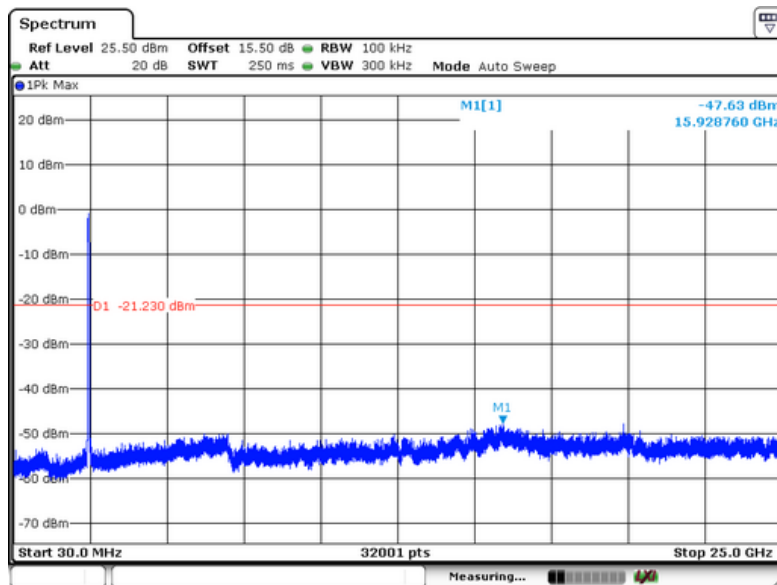

Middle Channel

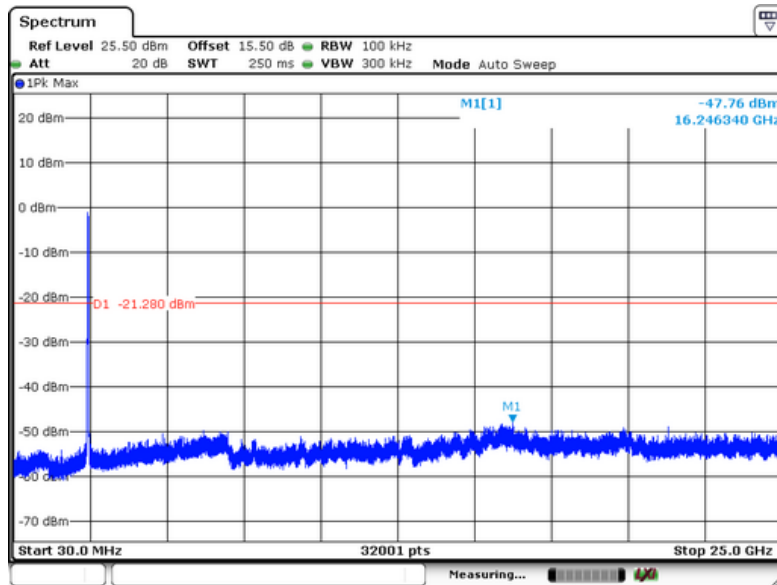

High Channel

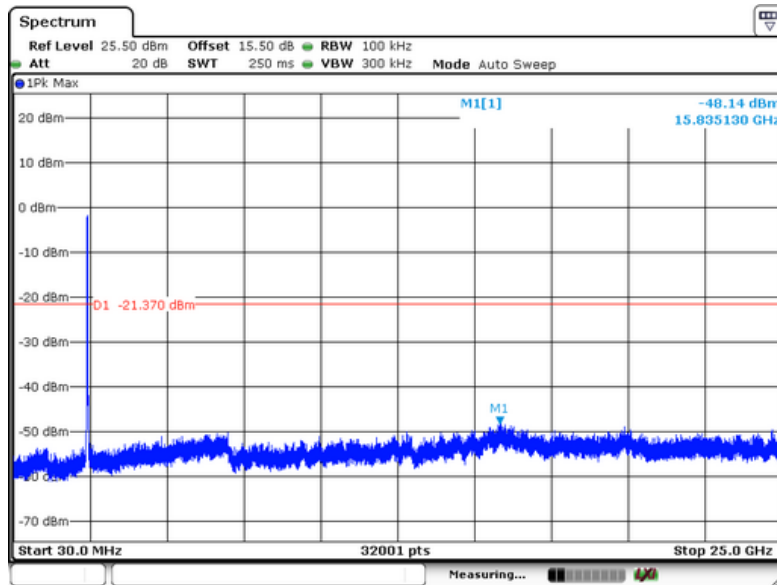



## 8 Band Edge Measurement

Test Requirement	:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method	:	ANSI C63.10:2013, KDB 558074 D01 DTS MEAS GUIDANCE V03R03
Test Limit	:	Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode	:	Refer to section 3.3


### 8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold




### 8.2 Test Result


802.11b

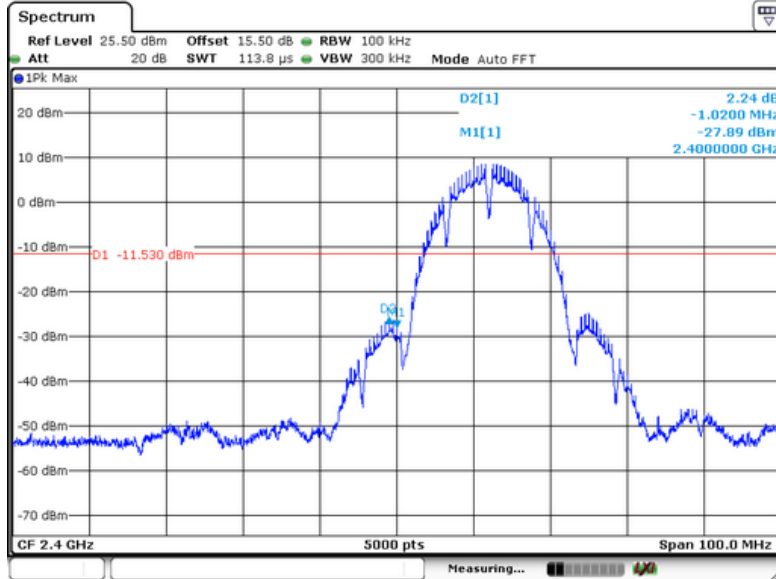


802.11b

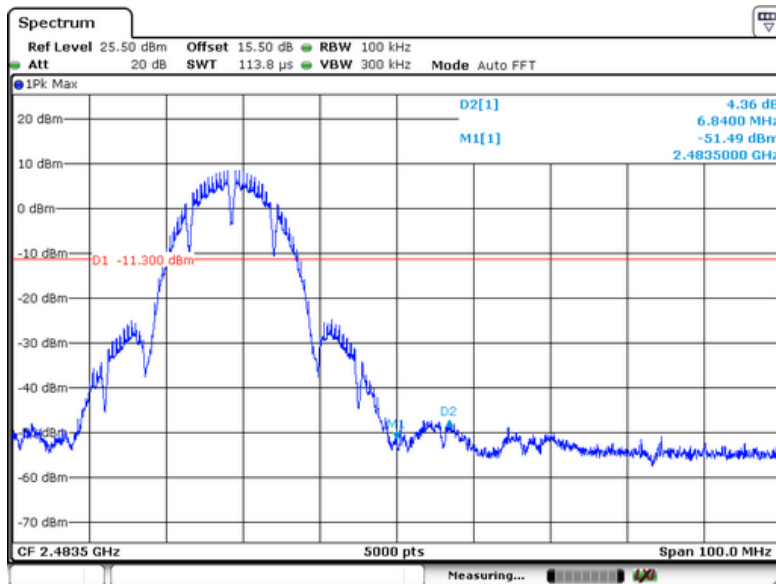


802.11g

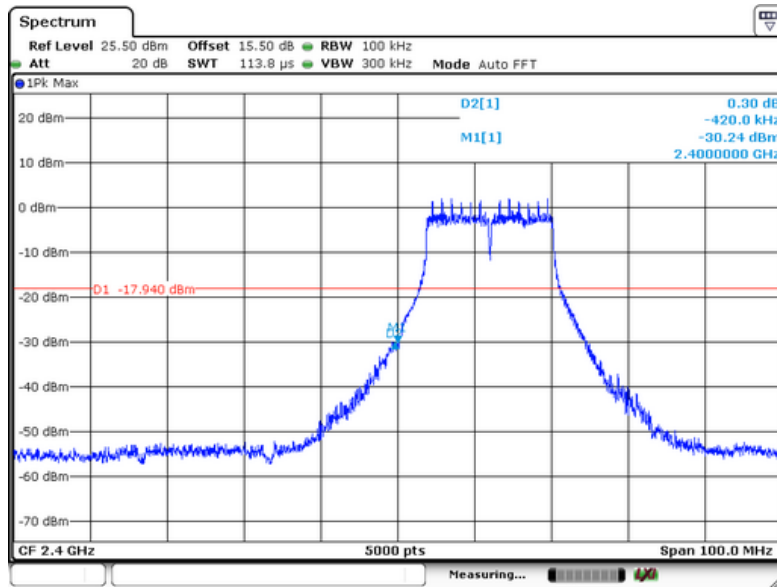


802.11g

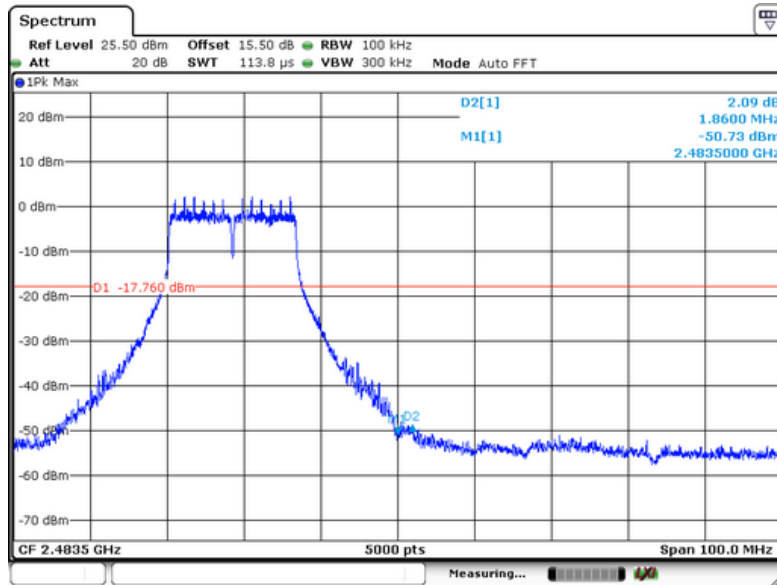

802.11n-HT20

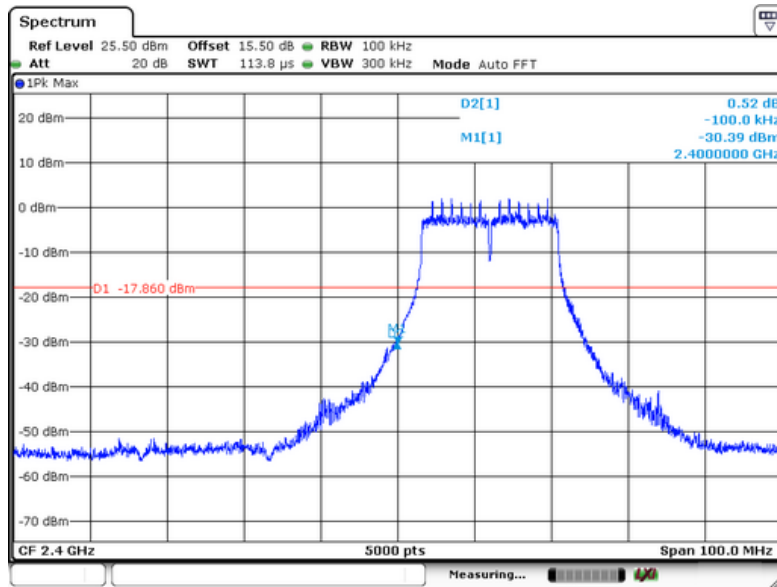


802.11n-HT20

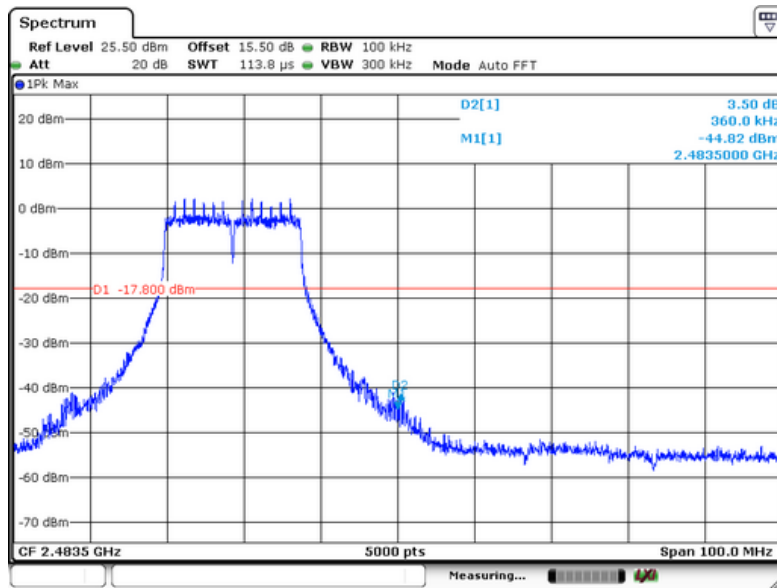




802.11n-HT40

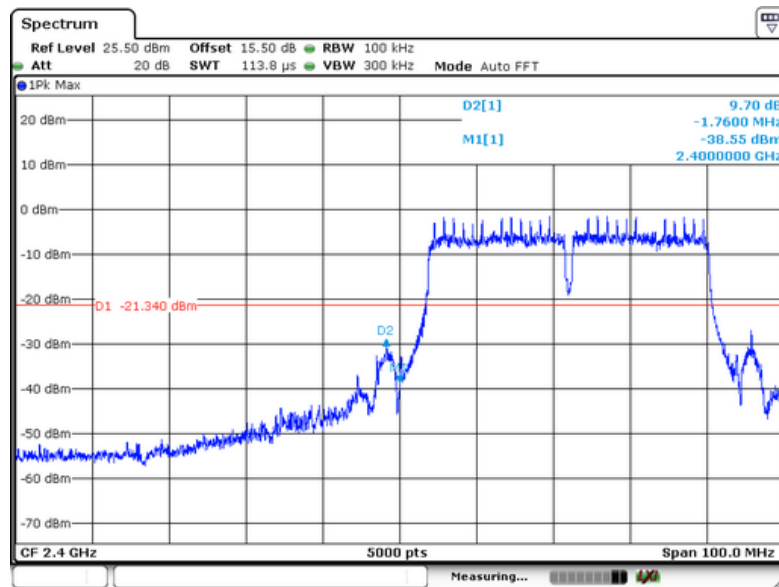

802.11n-HT40

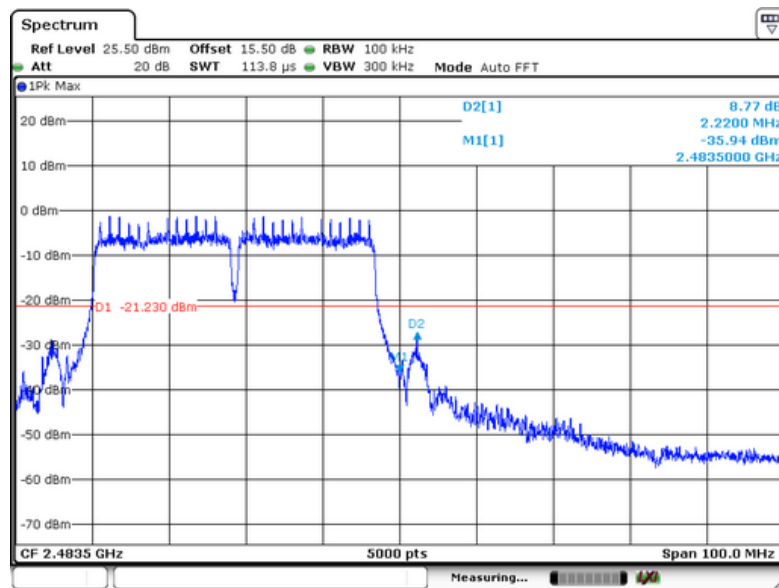



### 9 6dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013

Test Limit : Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Mode : Refer to section 3.3


#### 9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz,


#### 9.2 Test Result

Modulation	Bandwidth(MHz)			Limit
	Low Channel	Middle Channel	High Channel	
802.11b	10.06	10.06	10.06	≥500kHz
802.11g	16.35	16.35	16.36	≥500kHz
802.11n-HT20	17.59	17.58	17.58	≥500kHz
802.11n-HT40	35.63	35.64	35.66	≥500kHz


### 802.11b Low Channel

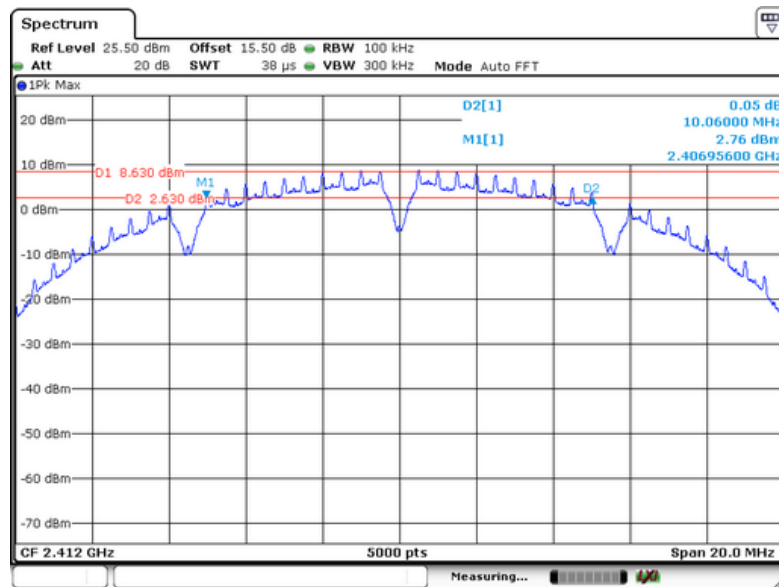


### 802.11b Middle Channel

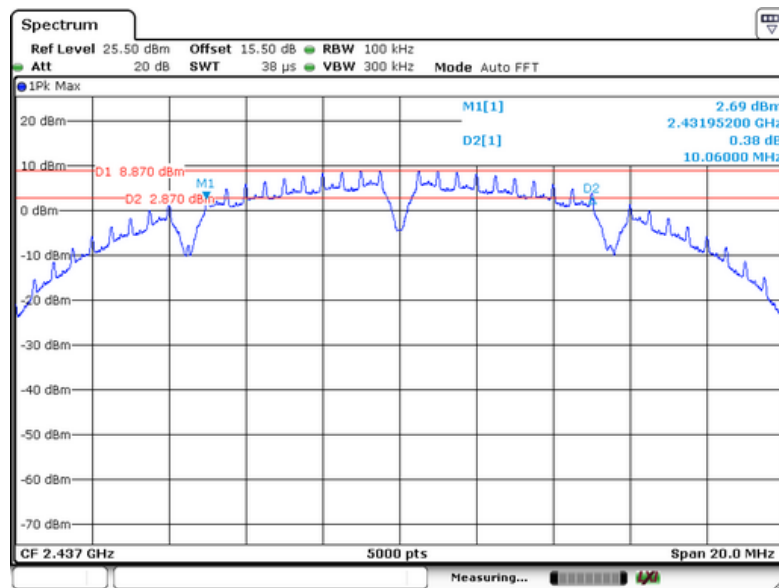


### 802.11b High Channel

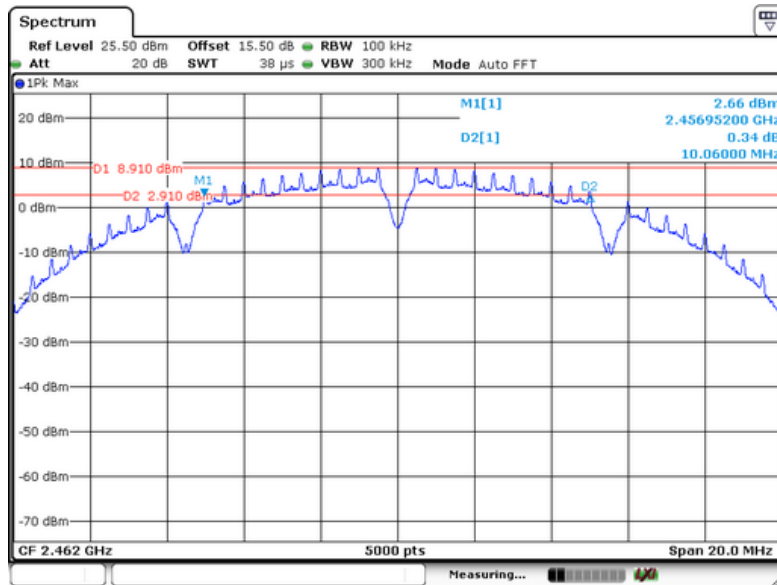


### 802.11g Low Channel

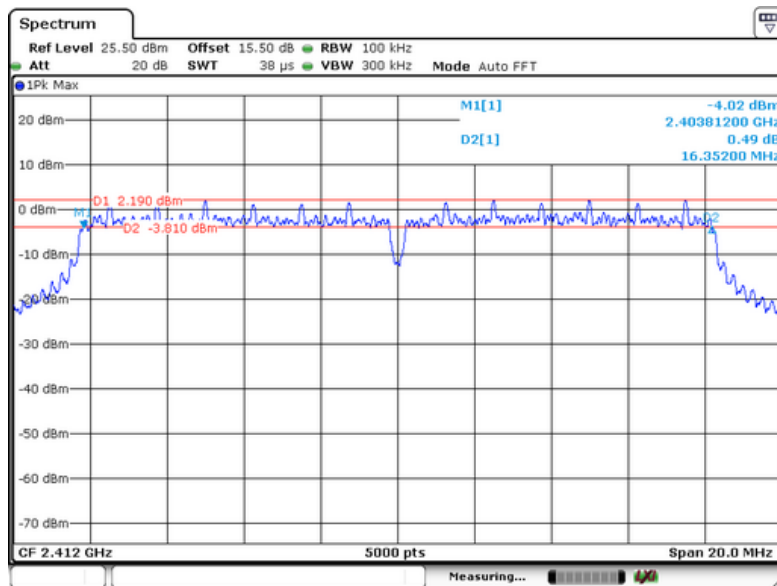


### 802.11g Middle Channel

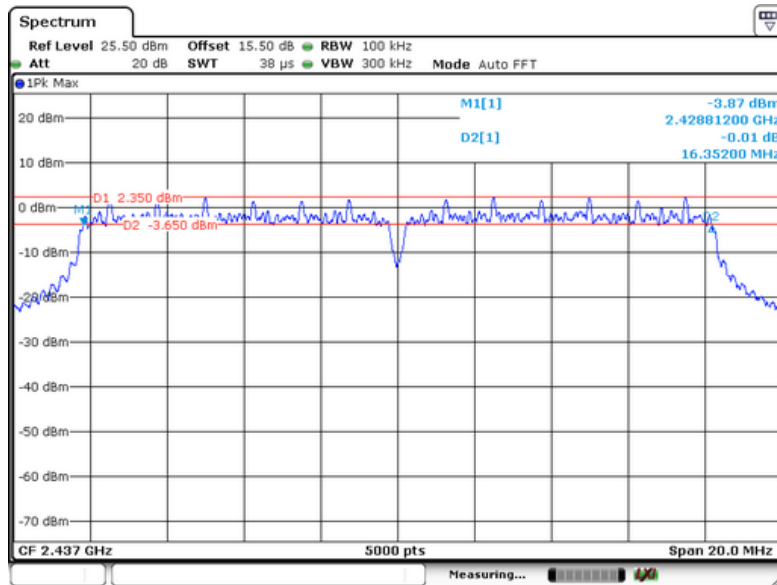


### 802.11g High Channel

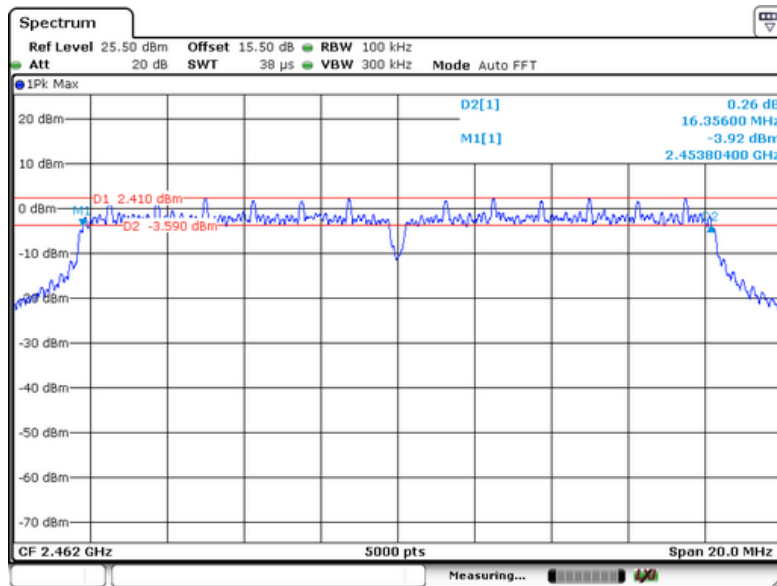


802.11n-HT20 Low Channel

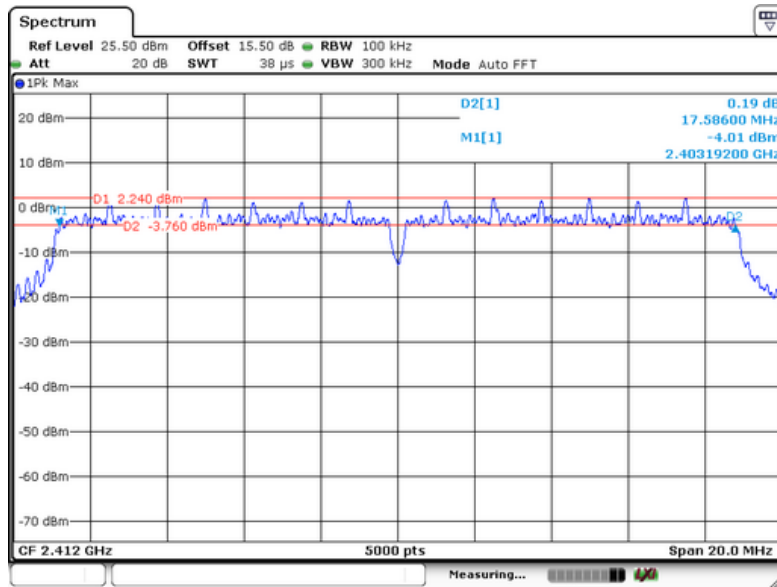


802.11n-HT20 Middle Channel

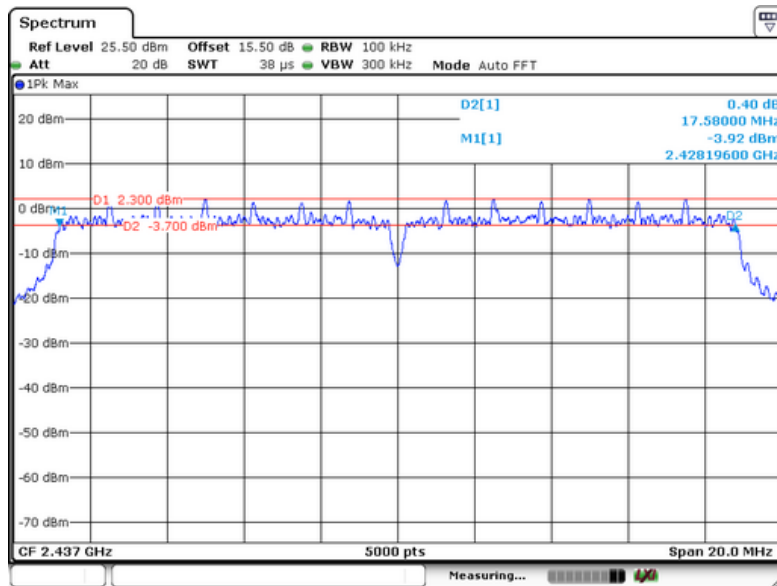


### 802.11n-HT20 High Channel

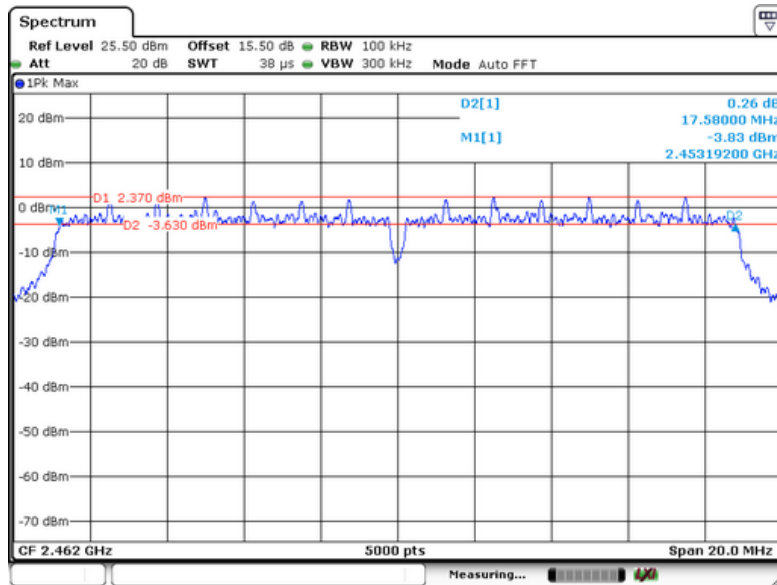


### 802.11n-HT40 Low Channel

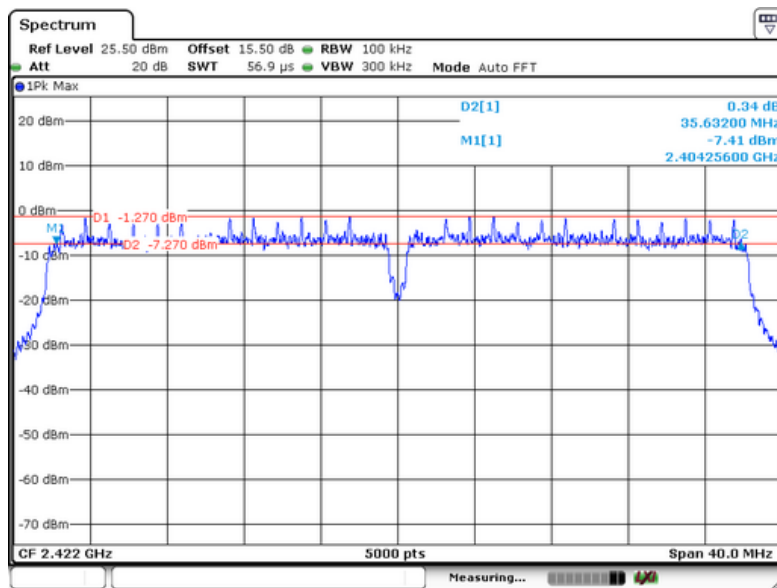

### 802.11n-HT40 Middle Channel

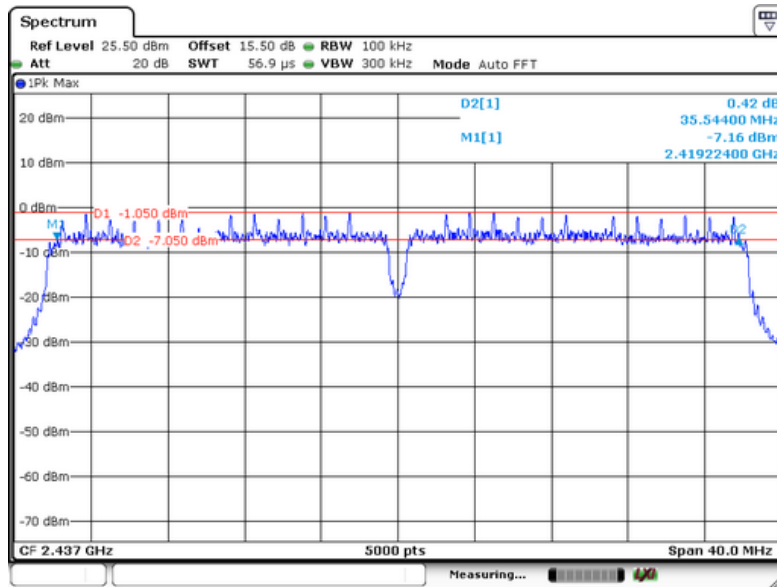

### 802.11n-HT40 High Channel

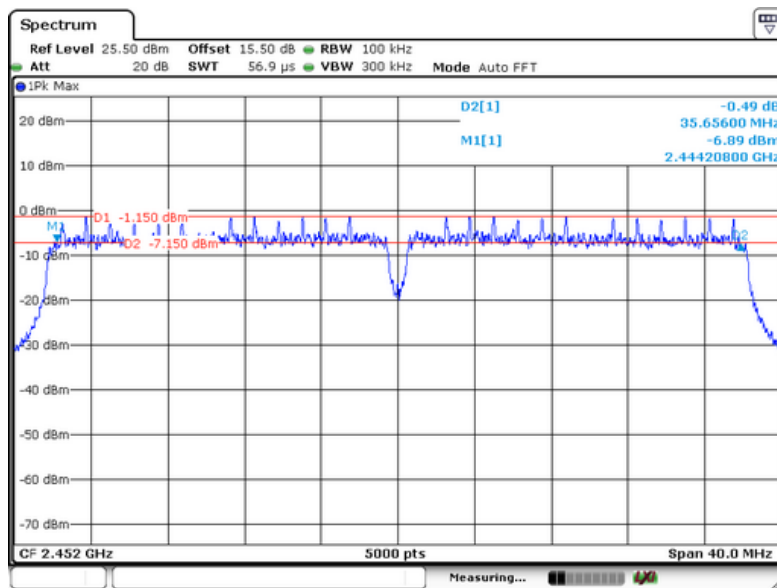





### 10 Maximum Peak Output Power

- Test Requirement : FCC CFR47 Part 15 Section 15.247
- Test Method : ANSI C63.10:2013
- Test Limit : Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.
- Test Mode : Refer to section 3.3

#### 10.1 Test Procedure

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

#### 10.2 Test Result

Modulation	Maximum Peak Output Power (dBm)			Limit
	Low Channel	Middle Channel	High Channel	
802.11b	15.22	15.04	14.84	1W(30dBm)
802.11g	14.36	13.26	13.04	1W(30dBm)
802.11n-HT20	13.05	12.53	11.69	1W(30dBm)
802.11n-HT40	11.12	10.93	9.68	1W(30dBm)



### 11 Power Spectral density

- Test Requirement : FCC CFR47 Part 15 Section 15.247
- Test Method : ANSI C63.10:2013
- Test Limit : Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
- Test Mode : Refer to section 3.3


#### 11.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


#### 11.2 Test Result

Modulation	Power Spectral density ( dBm/3kHz )			Limit
	Low Channel	Middle Channel	High Channel	
802.11b	-4.13	-4.67	-3.66	8dBm/3kHz
802.11g	-12.15	-11.68	-11.80	8dBm/3kHz
802.11n-HT20	-12.56	-11.66	-12.00	8dBm/3kHz
802.11n-HT40	-14.63	-15.79	-15.79	8dBm/3kHz

802.11b Low Channel

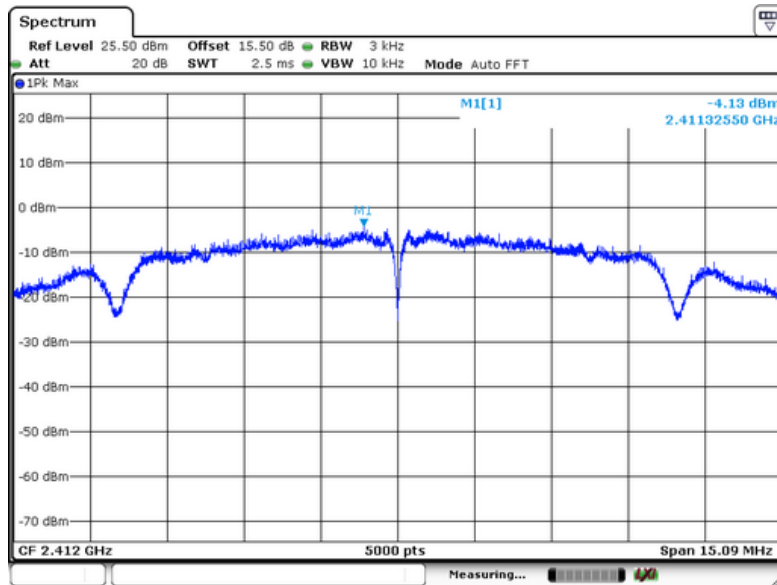

802.11b Middle Channel

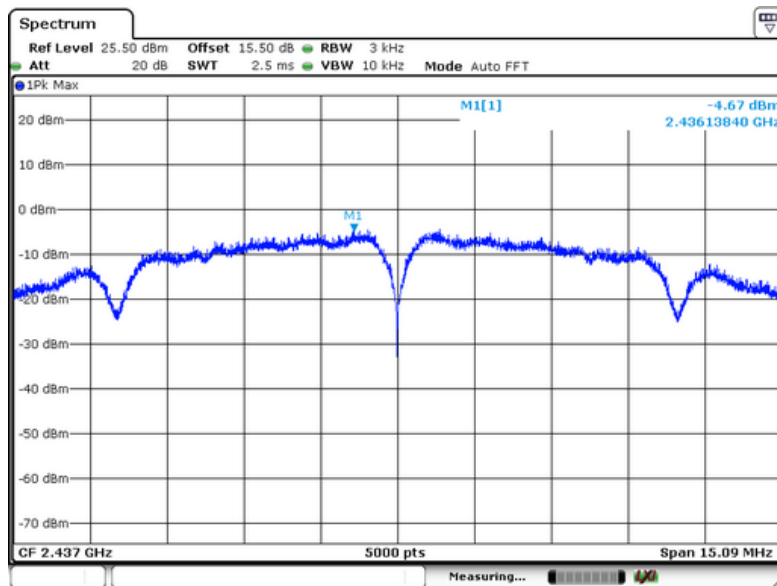





PRECISE TESTING

Report No.: PTC DQ06170801001E-FC01


### 802.11b High Channel

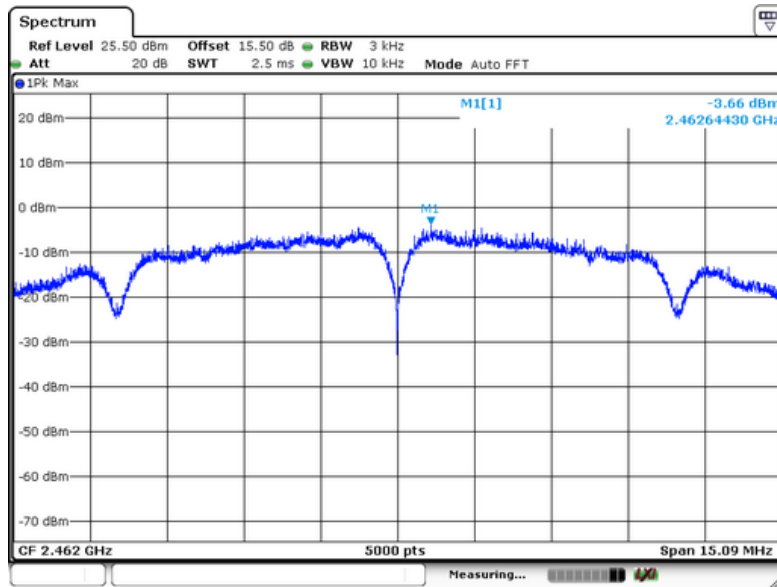

### 802.11g Low Channel

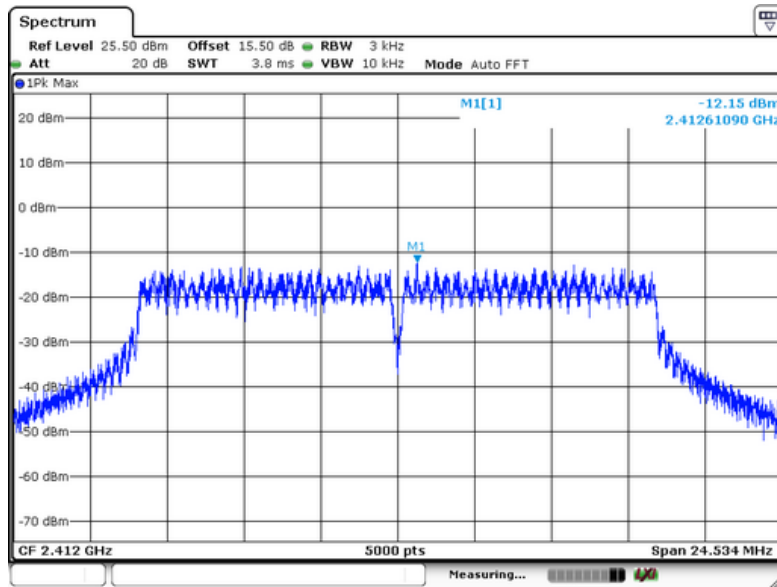

### 802.11g Middle Channel

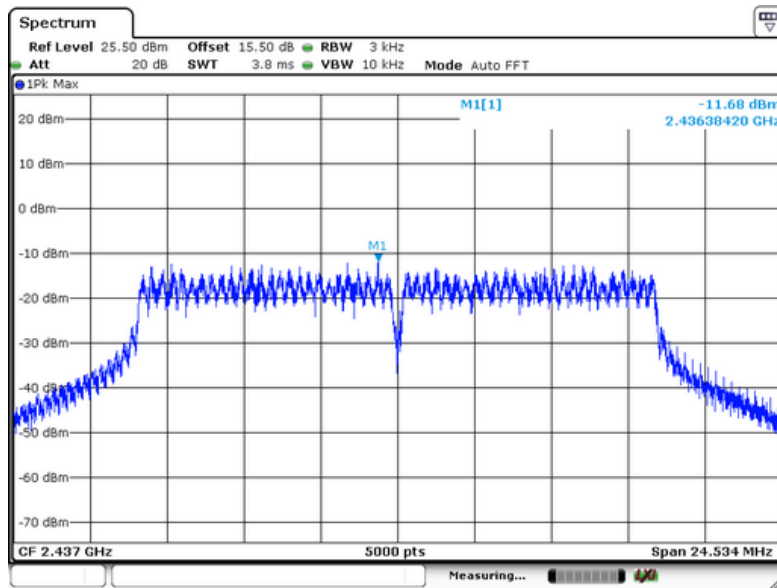





PRECISE TESTING

Report No.: PTC DQ06170801001E-FC01


### 802.11g High Channel

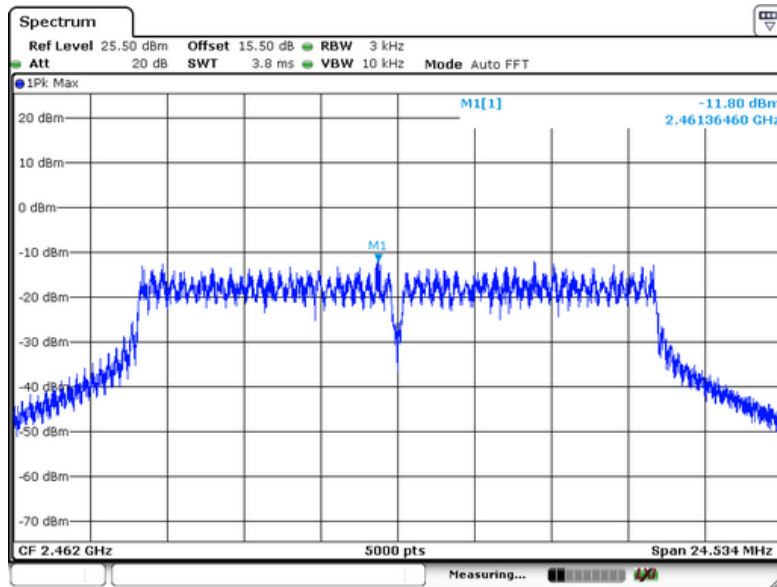

802.11n-HT20 Low Channel

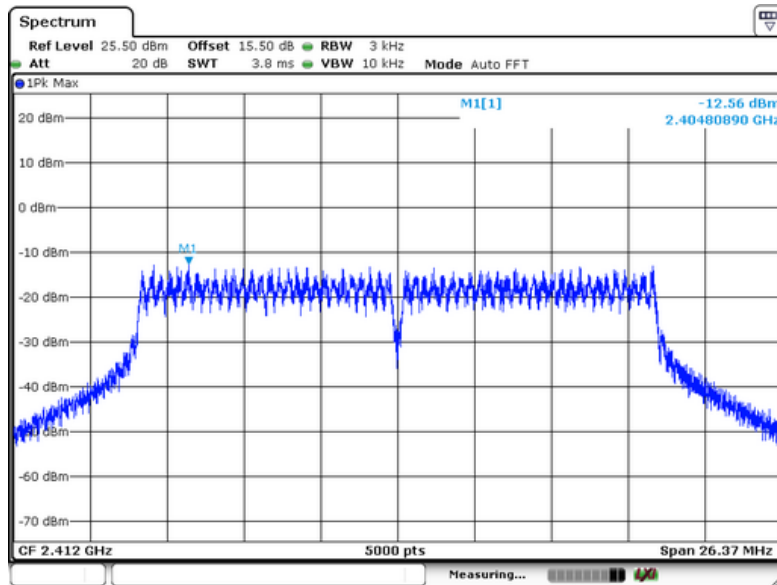

802.11n-HT20 Middle Channel

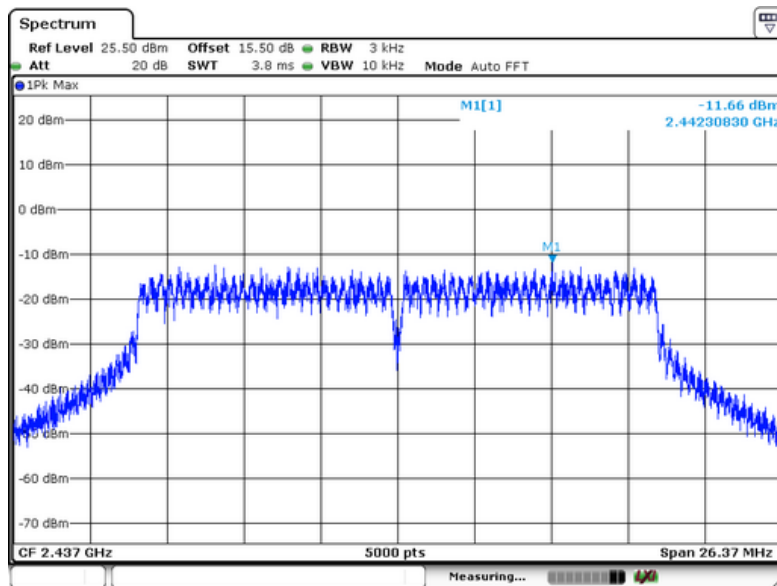


802.11n-HT20 High Channel




PRECISE TESTING

Report No.: PTC DQ06170801001E-FC01

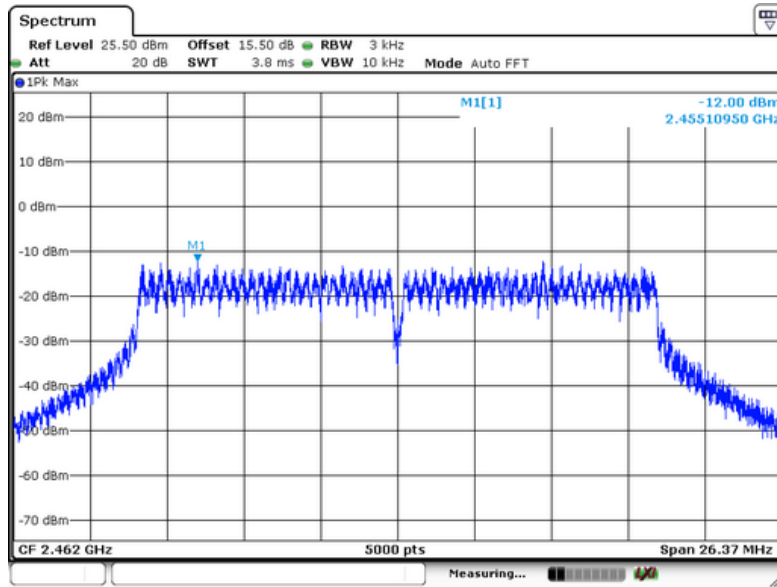




802.11n-HT40 Low Channel

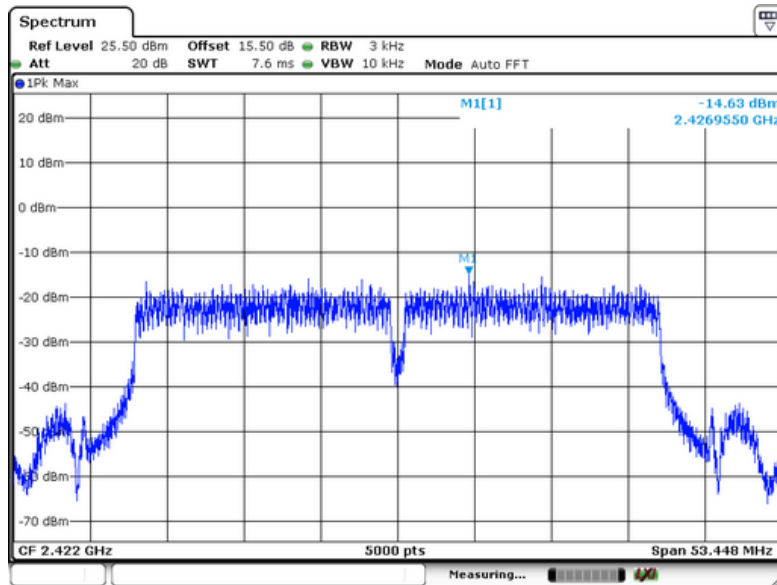


802.11n-HT40 Middle Channel

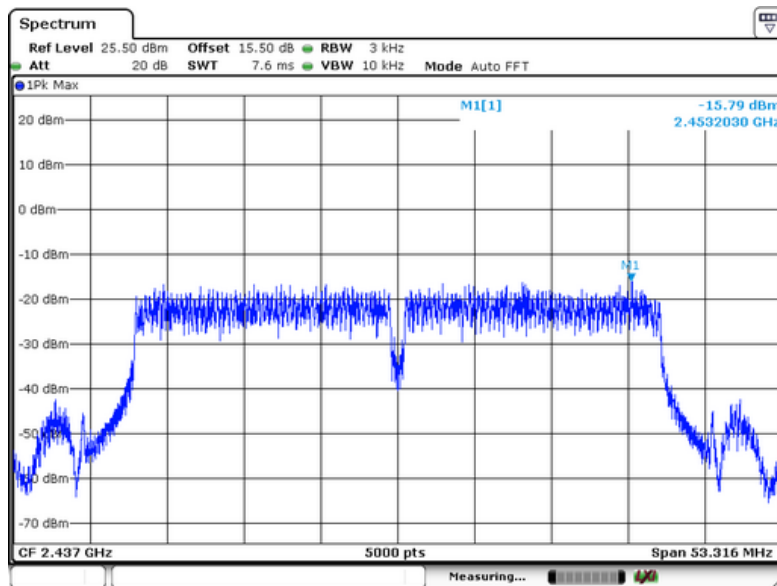



802.11n-HT40 High Channel

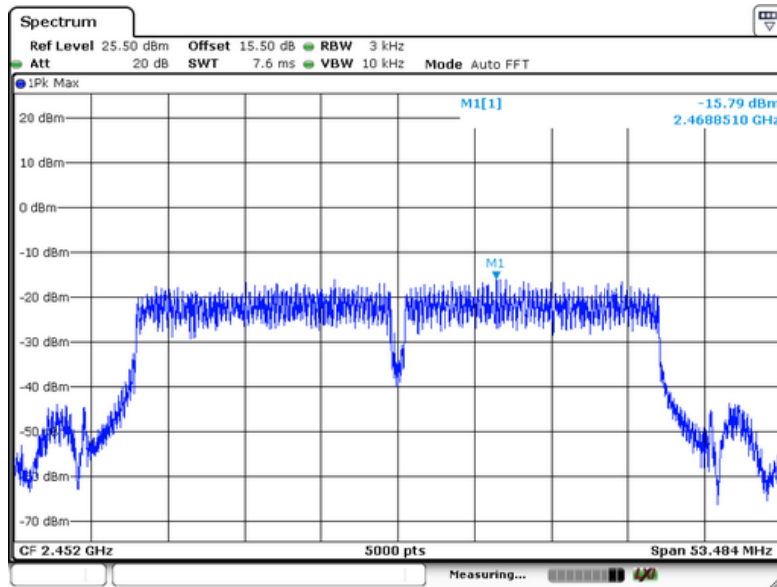



## **12 Antenna Application**

### **12.1 Antenna Requirement**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **12.2 Result**

The EUT'S antenna, permanent attached antenna, is internal antenna. The antenna's gain is 2dBi and meets the requirement.



PRECISE TESTING


Report No.: PTCDQ06170801001E-FC01

## 13 Test Setup


### Conducted Emissions



Radiated Spurious Emissions  
From 30MHz-1000MHz

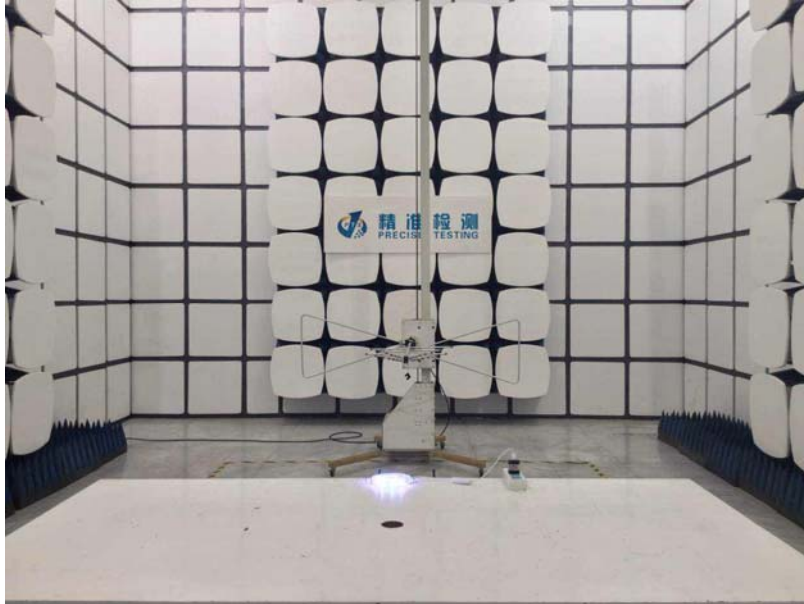

Above 1GHz

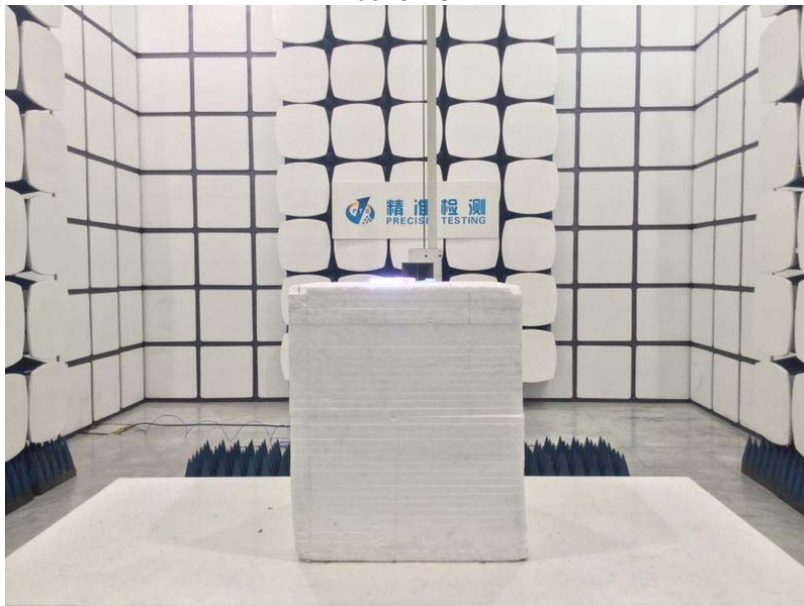







PRECISE TESTING

Report No.: PTCDQ06170801001E-FC01



# 14 EUT Photos

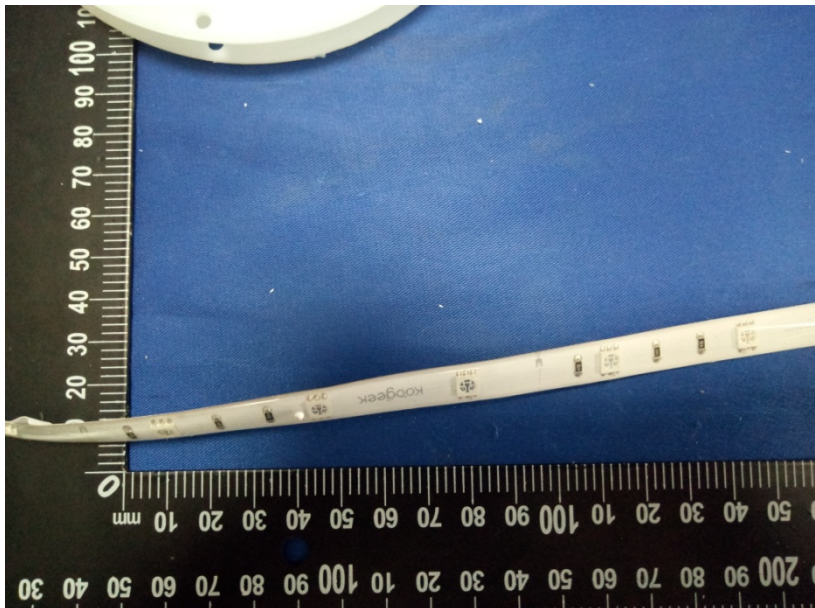

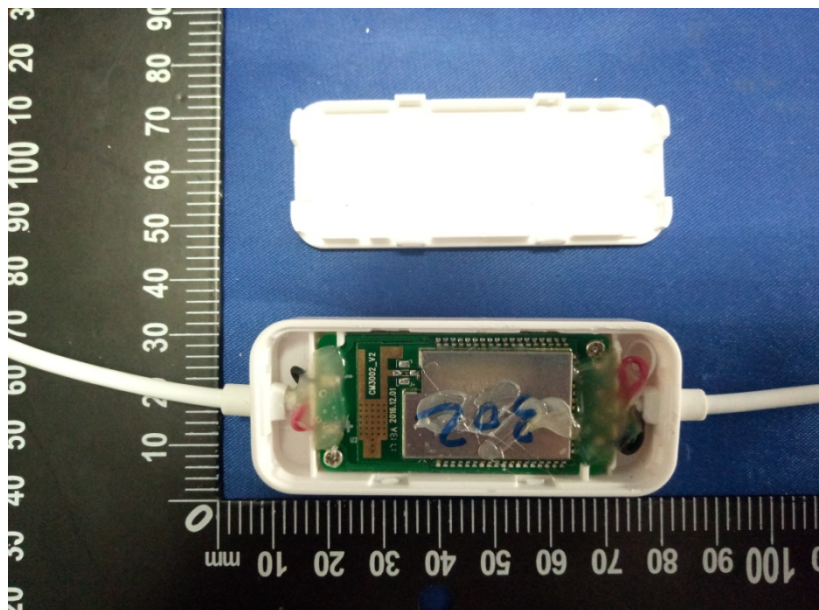

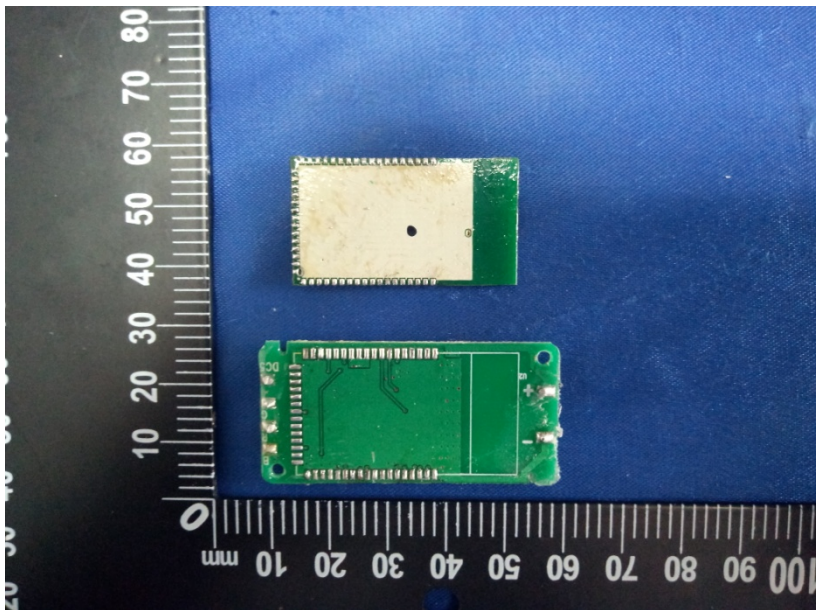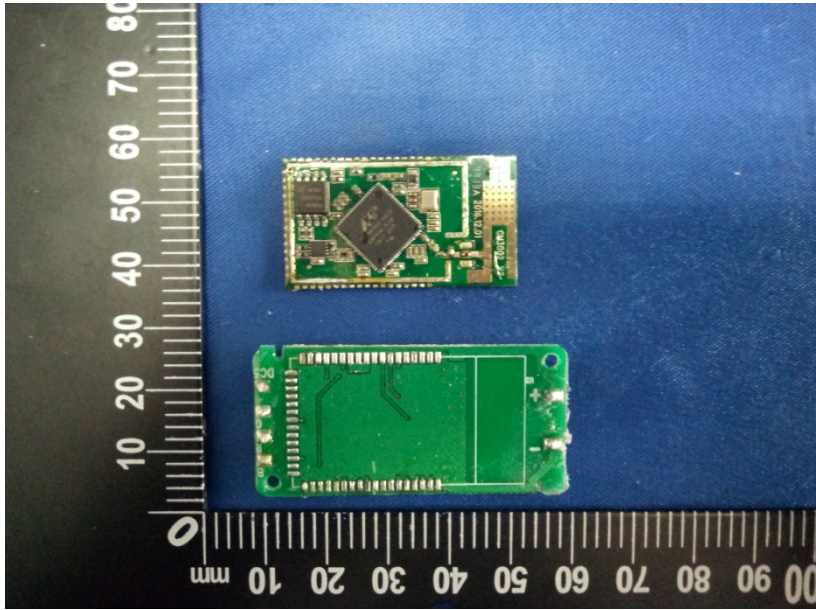



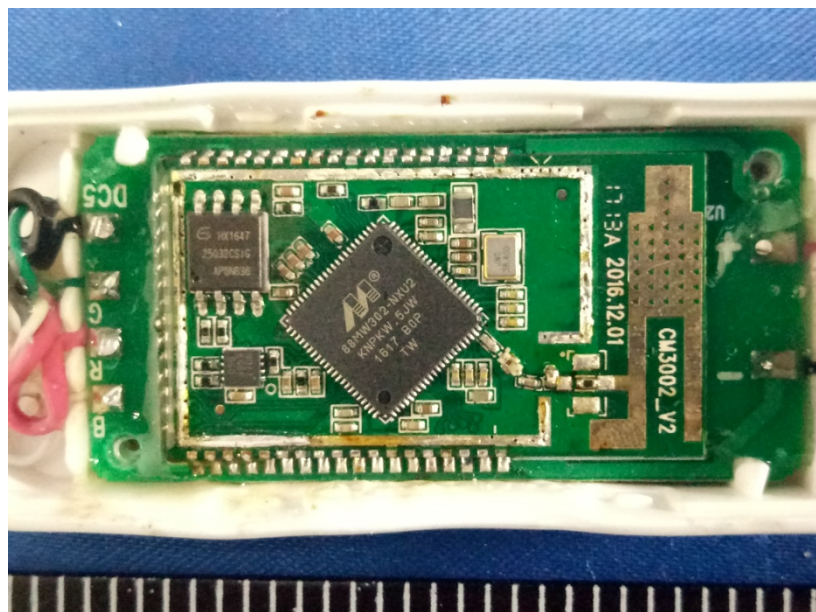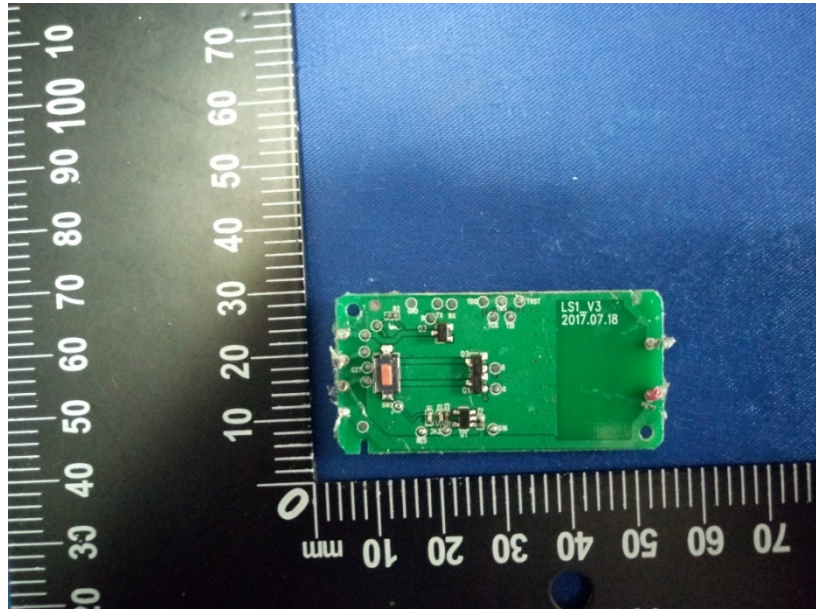

\*\*\*\*\*THE END REPORT\*\*\*\*\*