



REPORT No.: SZ16020003W03

FCC RF TEST REPORT

APPLICANT : Shanghai Mobvoi Information
Technology Company Limited

PRODUCT NAME : Smart Watch

MODEL NAME : WE12016

TRADE NAME : ticwatch

BRAND NAME : ticwatch

FCC ID : 2AHEA-WE12016

STANDARD(S) : 47 CFR Part 15 Subpart C

ISSUE DATE : 2016-05-19



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , Guangdong Province, P. R. China

Tel: 86-755-36698555
Http://www.morlab.com

Fax: 86-755-36698525
E-mail: service@morlab.cn



DIRECTORY

TEST REPORT DECLARATION	4
1. TECHNICAL INFORMATION	5
1.1 APPLICANT INFORMATION	5
1.2 EQUIPMENT UNDER TEST (EUT) DESCRIPTION	5
1.2.1 IDENTIFICATION OF ALL USED EUTS	6
1.3 TEST STANDARDS AND RESULTS	6
1.3.1 TEST ENVIRONMENT CONDITIONS	6
2. 47 CFR PART 15C REQUIREMENTS	7
2.1 ANTENNA REQUIREMENT	7
2.1.1 APPLICABLE STANDARD	7
2.1.2 RESULT: COMPLIANT	7
2.2 PEAK OUTPUT POWER	7
2.2.1 REQUIREMENT	7
2.2.2 TEST DESCRIPTION	7
2.2.3 TEST RESULT	8
2.3 BANDWIDTH	11
2.3.1 REQUIREMENT	11
2.3.2 TEST DESCRIPTION	11
2.3.3 TEST RESULT	11
2.4 CONDUCTED SPURIOUS EMISSIONS AND BAND EDGE	20
2.4.1 REQUIREMENT	20
2.4.2 TEST DESCRIPTION	20
2.4.3 TEST RESULT	20
2.5 POWER SPECTRAL DENSITY (PSD)	33
2.5.1 REQUIREMENT	33
2.5.2 TEST DESCRIPTION	33
2.5.3 TEST RESULT	34
2.6 RESTRICTED FREQUENCY BANDS	42
2.6.1 REQUIREMENT	42
2.6.2 TEST DESCRIPTION	42
2.6.3 TEST RESULT	43



2.7	CONDUCTED EMISSION	54
2.7.1	REQUIREMENT	54
2.7.2	TEST DESCRIPTION	54
2.7.3	TEST RESULT	55
2.8	RADIATED EMISSION	57
2.8.1	REQUIREMENT	57
2.8.2	TEST DESCRIPTION	58
2.8.3	TEST RESULT	60
ANNEX A GENERAL INFORMATION		73

Change History		
Issue	Date	Reason for change
1.0	2016-05-19	First edition



REPORT No.: SZ16020003W03

TEST REPORT DECLARATION

Applicant	Shanghai Mobvoi Information Technology Company Limited
Applicant Address	Building 2-106, 1690 Cailun Road, China (Shanghai) free trade area, China
Manufacturer Address	Shanghai Mobvoi Information Technology Company Limited
Manufacturer	Building 2-106, 1690 Cailun Road, China (Shanghai) free trade area, China
Product Name	Smart Watch
Model Name	WE12016
Brand Name	ticwatch
HW Version	2.0
SW Version	5.1
Test Standards	47 CFR Part 15 Subpart C
Test Date	2016-04-11 to 2016-04-25
Test Result	PASS

Tested by : Zou Jian
Zou Jian

Reviewed by : Qiu Xiaojun
Qiu Xiaojun

Approved by : Peng Huarui
Peng Huarui



1. TECHNICAL INFORMATION

Note: Provide by applicant.

1.1 Applicant Information

Company:	Shanghai Mobvoi Information Technology Company Limited
Address	Building 2-106, 1690 Cailun Road, China (Shanghai) free trade area, China

1.2 Equipment under Test (EUT) Description

Brand Name:	ticwatch
Trade Name:	ticwatch
Model Name:	WE12016
Frequency Range:	802.11b/g/n-20MHz: 2.412GHz - 2.462GHz 802.11n-40MHz: 2.422GHz - 2.452GHz
Channel Number:	802.11b/g/n-20MHz: 11 802.11n-40MHz: 7
Modulation Type:	DSSS, OFDM
Antenna Type:	Dedicated Antenna
Antenna Gain:	-6.3 dBi

NOTE:

1. The EUT is a Smart Watch, it contains WIFI Module operating at 2.4GHz ISM; it supports 802.11b, 802.11g, 802.11n and they are all tested in this report.
For 802.11b/g/n-20MHz (2.4GHz band), the frequencies allocated is $F \text{ (MHz)} = 2412 + 5 \times (n-1)$ ($1 \leq n \leq 11$). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 1 (2412MHz), 6 (2437MHz) and 11 (2462MHz).
For 802.11n-40MHz, the frequencies allocated is $F \text{ (MHz)} = 2412 + 5 \times (n-1)$ ($3 \leq n \leq 9$). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 3 (2422MHz), 6 (2437MHz) and 9 (2452MHz).
2. The EUT powered by battery. During the test, the EUT powered by a new battery.
3. The EUT connected to the serial port of the computer with a serial communication cable, and then use the dedicated software to control the EUT into the test mode.
4. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.
5. The antenna connector of EUT is designed with permanent attachment and no consideration of replacement.



1.2.1 Identification of all used EUTs

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
A01	2.0	5.1

1.3 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-15 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Result
1	15.203	Antenna Requirement	N.A	<u>PASS</u>
2	15.247(b)	Peak Output Power	Apr 20, 2016	<u>PASS</u>
3	15.247(a)	Bandwidth	Apr 20, 2016	<u>PASS</u>
4	15.247(d)	Conducted Spurious Emission and Band Edge	Apr 21&22, 2016	<u>PASS</u>
5	15.247(d)	Restricted Frequency Bands	Apr 22&25, 2016	<u>PASS</u>
6	15.207	Conducted Emission	Apr 22, 2016	<u>PASS</u>
7	15.209 ,15.247(d)	Radiated Emission	Apr 22, 2016	<u>PASS</u>
8	15.247(e)	Power spectral density (PSD)	Apr 20, 2016	<u>PASS</u>

The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10 2013.

1.3.1 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106



2. 47 CFR PART 15C REQUIREMENTS

2.1 Antenna requirement

2.1.1 Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2 Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2 Peak Output Power

2.2.1 Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.2.2 Test Description

The measured output power was calculated by the reading of the Power Meter and calibration.

A. Test procedure

The measured output power was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for Peak Output Power test on the spectrum analyzer:

- a) Set analyzer center frequency to channel center frequency.
- b) Set the RBW to 1MHz
- c) Set VBW to 3MHz
- d) Set span to 3MHz
- e) Sweep time to auto couple.
- f) Detector = peak.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use peak marker function to determine the peak amplitude level.

**B. Test Setup:**

The EUT (Equipment under the test) which is coupled to the Power Meter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in power meter.

C. Equipments List:

Please reference ANNEX A(1.5).

2.2.3 Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

2.2.3.1 802.11b Test Mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	13.73	0.024	30	1	PASS
6	2437	13.60	0.023			PASS
11	2462	13.52	0.022			PASS

Channel	Frequency (MHz)	Measured Output Average Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	11.63	0.015	30	1	PASS
6	2437	11.48	0.014			PASS
11	2462	11.40	0.014			PASS

**2.2.3.2 802.11g Test mode**

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	18.85	0.077	30	1	PASS
6	2437	18.76	0.075			PASS
11	2462	18.68	0.074			PASS

Channel	Frequency (MHz)	Measured Output Average Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	9.64	0.009	30	1	PASS
6	2437	9.35	0.009			PASS
11	2462	9.28	0.008			PASS

2.2.3.3 802.11n-20MHz Test mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	18.71	0.074	30	1	PASS
6	2437	18.56	0.072			PASS
11	2462	18.15	0.065			PASS

Channel	Frequency (MHz)	Measured Output Average Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	9.46	0.009	30	1	PASS
6	2437	9.25	0.008			PASS
11	2462	9.10	0.008			PASS



REPORT No.: SZ16020003W03

2.2.3.4 802.11n-40MHz Test mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
3	2422	19.76	0.095	30	1	PASS
6	2437	19.12	0.082			PASS
9	2452	19.59	0.091			PASS

Channel	Frequency (MHz)	Measured Output Average Power		Limit		Verdict
		dBm	W	dBm	W	
3	2422	11.91	0.016	30	1	PASS
6	2437	11.76	0.015			PASS
9	2452	11.72	0.015			PASS


2.3 Bandwidth

2.3.1 Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.3.2 Test Description

A. Test Set:

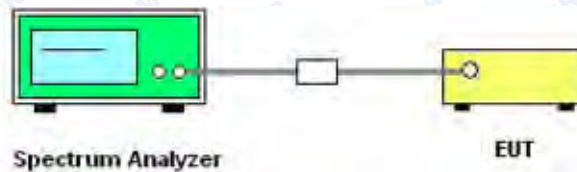

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

KDB 558074 Section 8.1 Option 1 was used in order to prove compliance.

B. Equipments List:

Please reference ANNEX A(1.5).

2.3.3 Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the Module.




REPORT No.: SZ16020003W03

2.3.3.1 802.11b Test mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	9.046	≥ 500	PASS
6	2437	9.059	≥ 500	PASS
11	2462	9.077	≥ 500	PASS


B. Test Plots

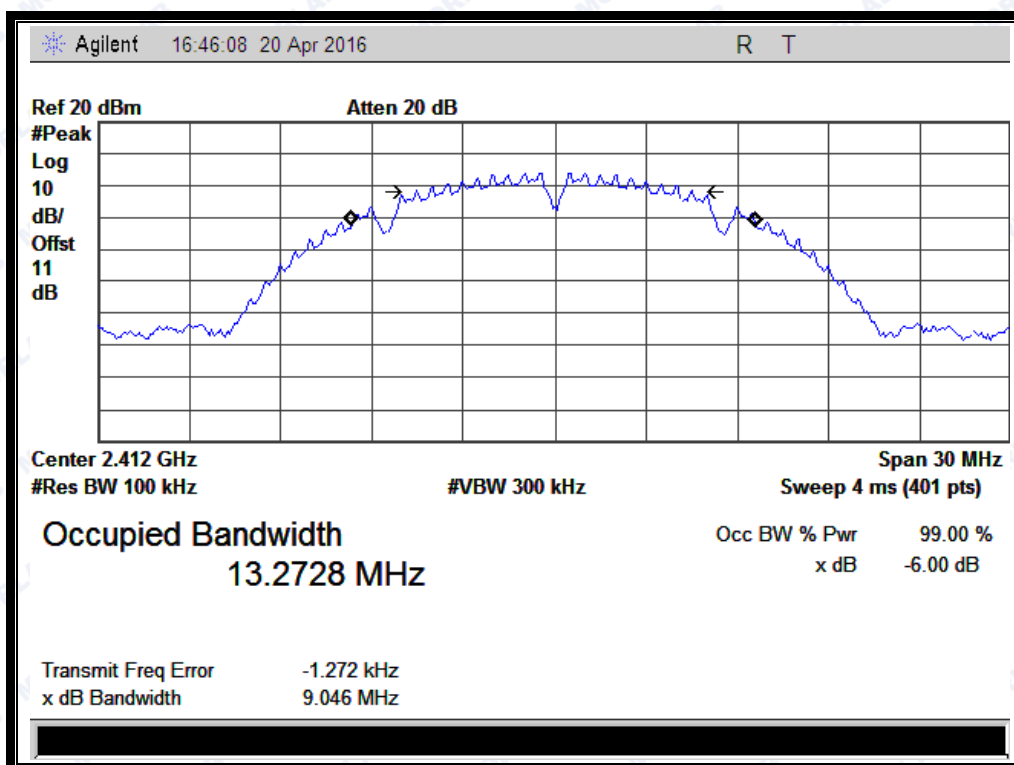


(Channel 1: 2412MHz @ 802.11b)



REPORT No.: SZ16020003W03

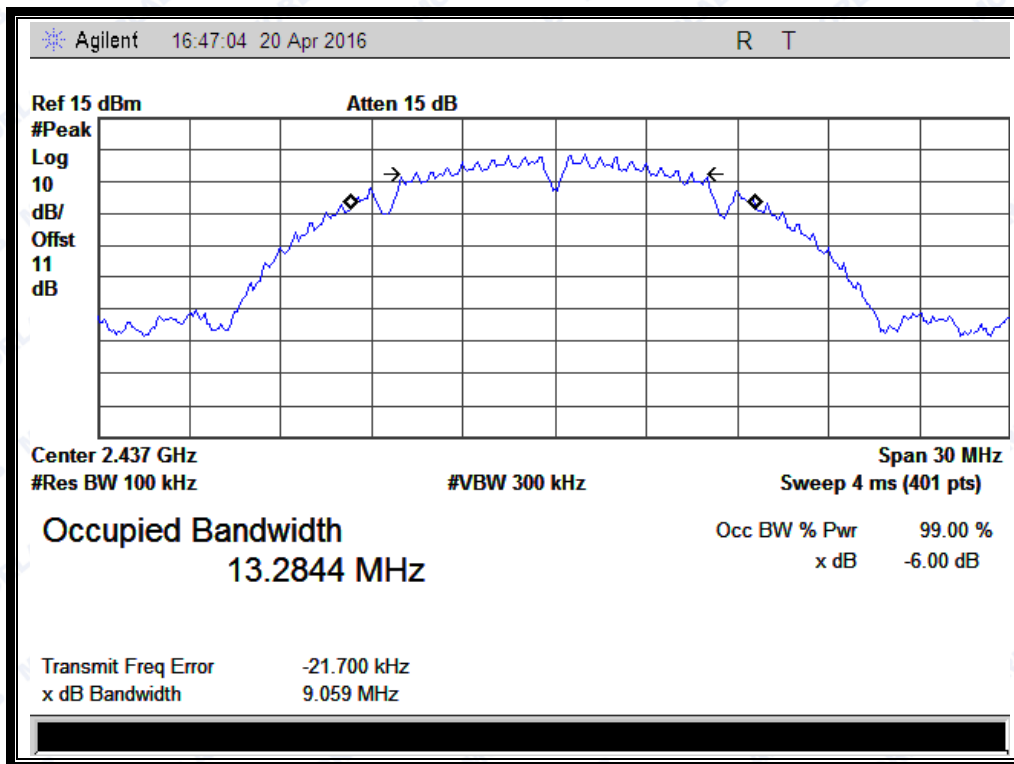

(Channel 6: 2437 MHz @ 802.11b)

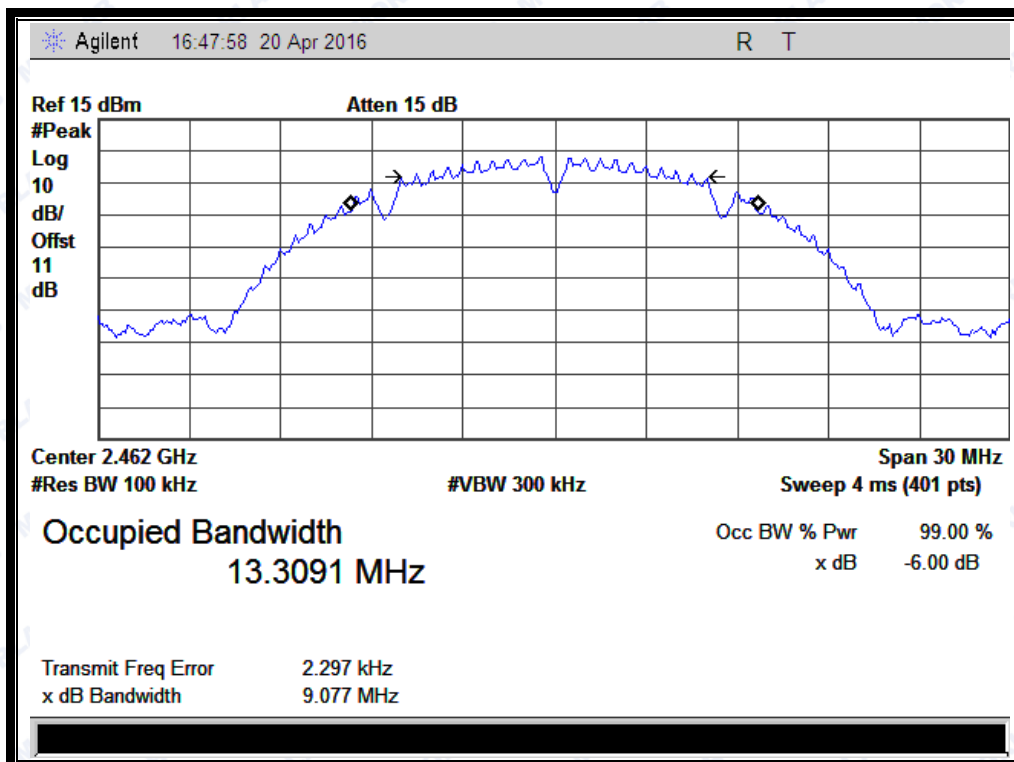

(Channel 11: 2462MHz @ 802.11b)




REPORT No.: SZ16020003W03

2.3.3.2 802.11g Test mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	16.483	≥ 500	PASS
6	2437	16.510	≥ 500	PASS
11	2462	16.472	≥ 500	PASS


B. Test Plots:

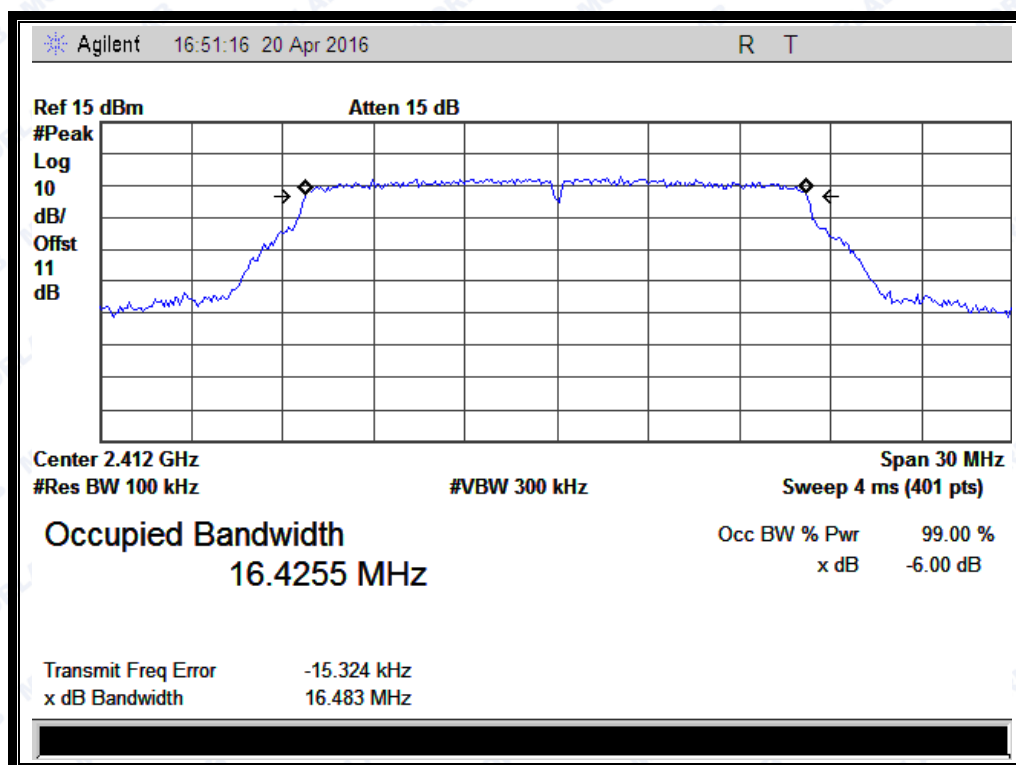


(Channel 1: 2412MHz @ 802.11g)



REPORT No.: SZ16020003W03

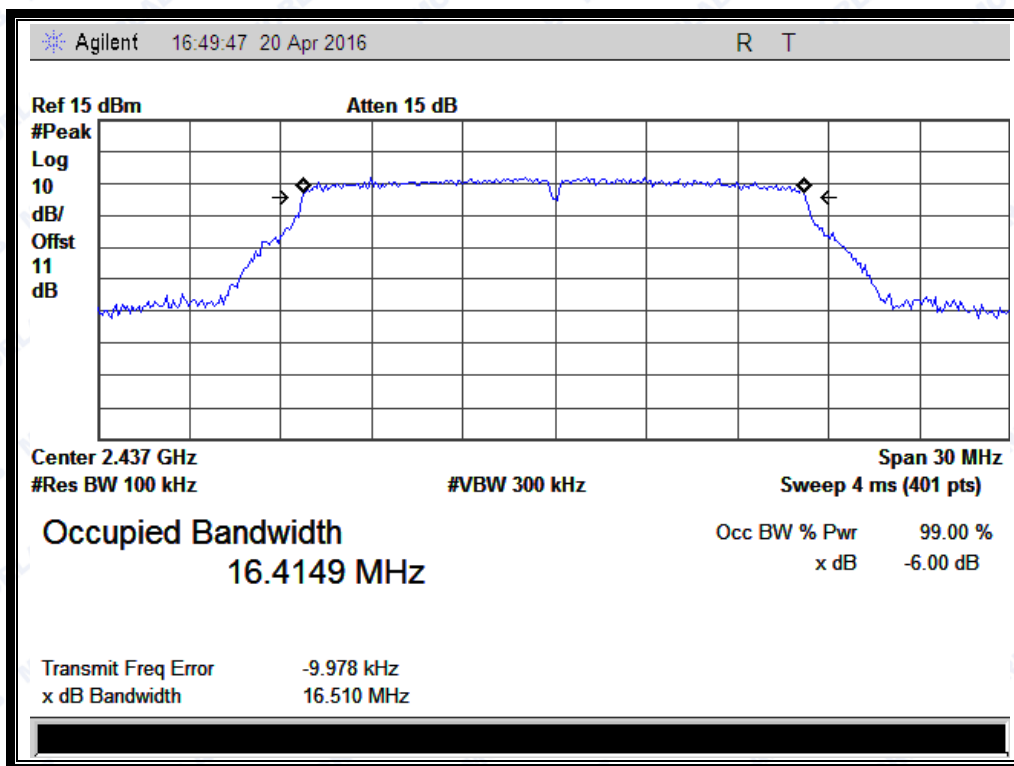

(Channel 6: 2437MHz @ 802.11g)

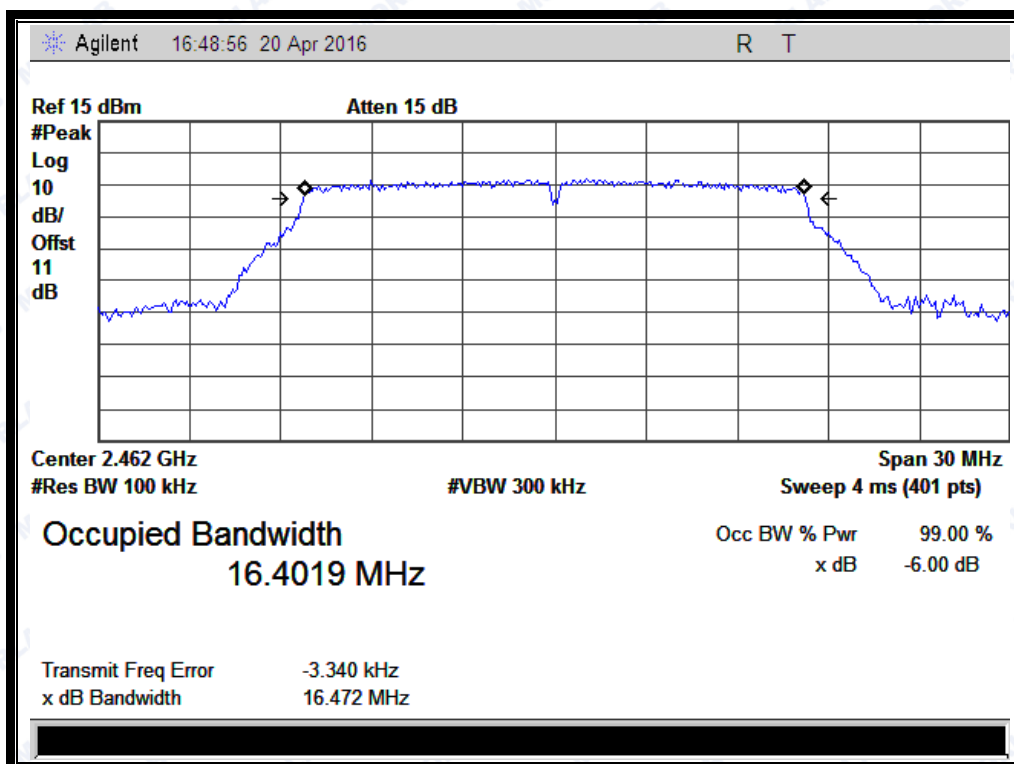

(Channel 11: 2462MHz @ 802.11g)




REPORT No.: SZ16020003W03

2.3.3.3 802.11n-20 Test mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	17.677	≥500	PASS
6	2437	17.691	≥500	PASS
11	2462	17.676	≥500	PASS


B. Test Plots:

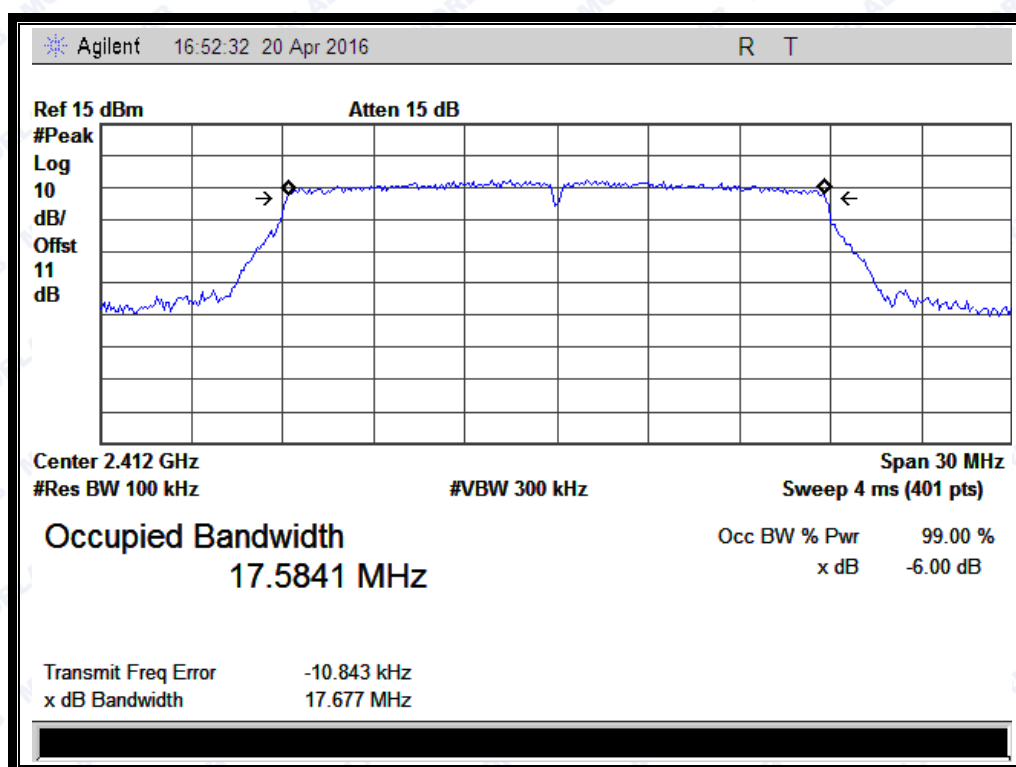


(Channel 1: 2412MHz @ 802.11n-20)



REPORT No.: SZ16020003W03

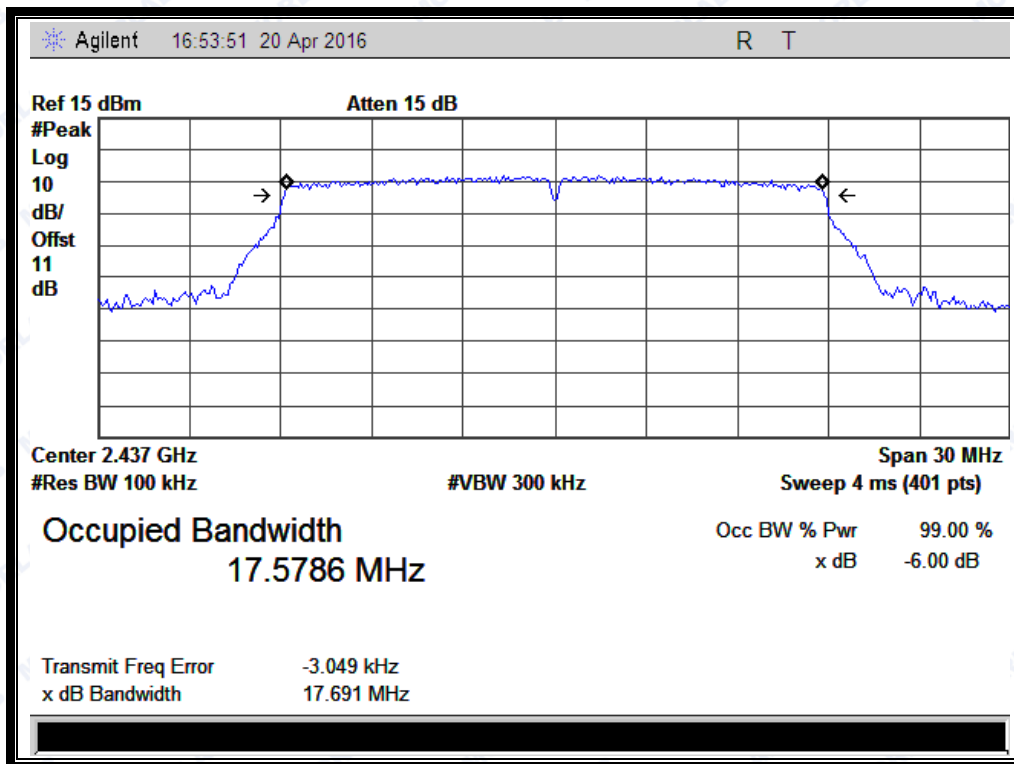

(Channel 6: 2437MHz @ 802.11n-20)

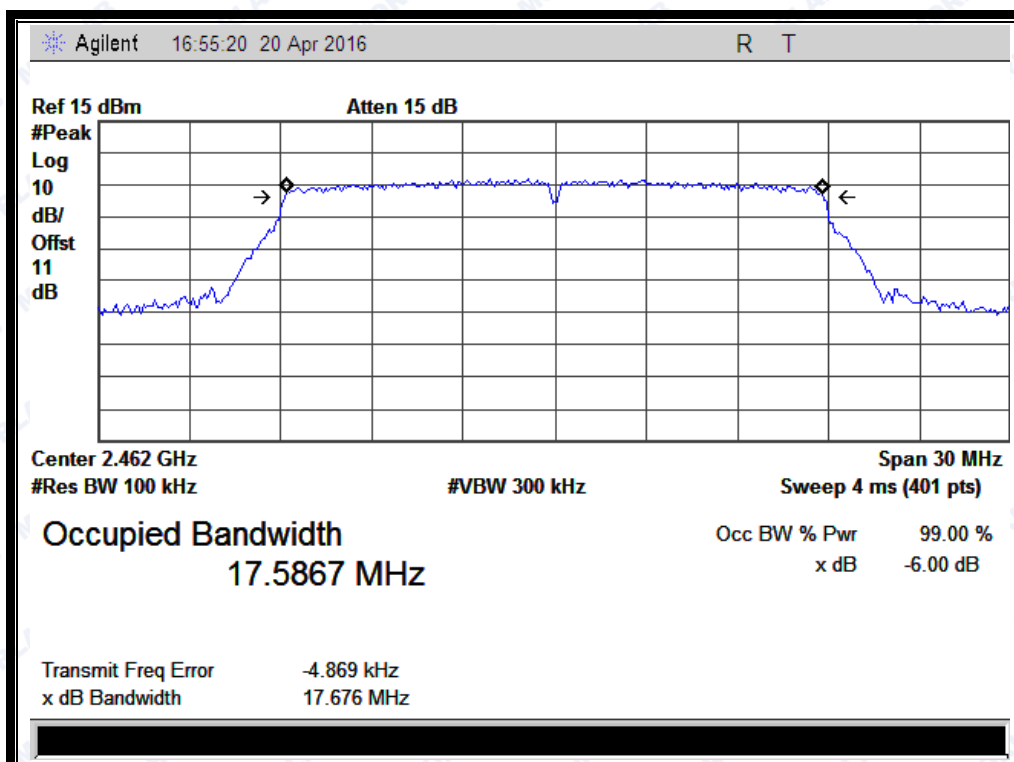

(Channel 11: 2462MHz @ 802.11n-20)




REPORT No.: SZ16020003W03

2.3.3.4 802.11n-40 Test mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
3	2422	36.402	≥500	PASS
6	2437	36.383	≥500	PASS
9	2452	36.400	≥500	PASS


B. Test Plots:

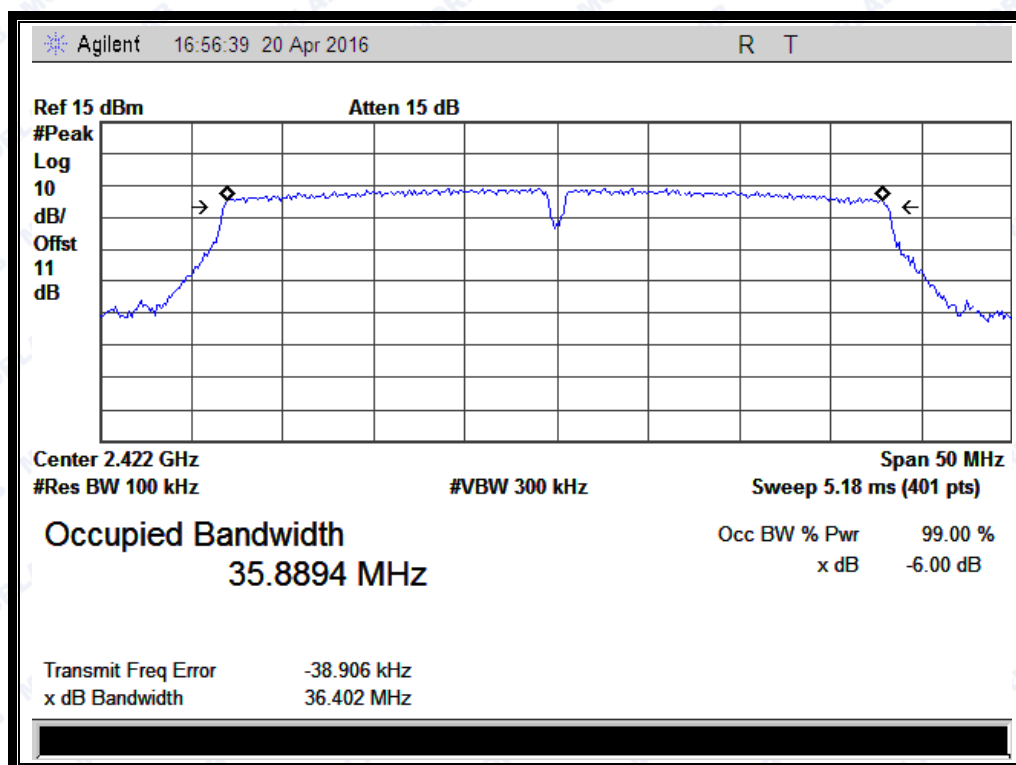


(Channel 3: 2422Mz @ 802.11n-40)



REPORT No.: SZ16020003W03

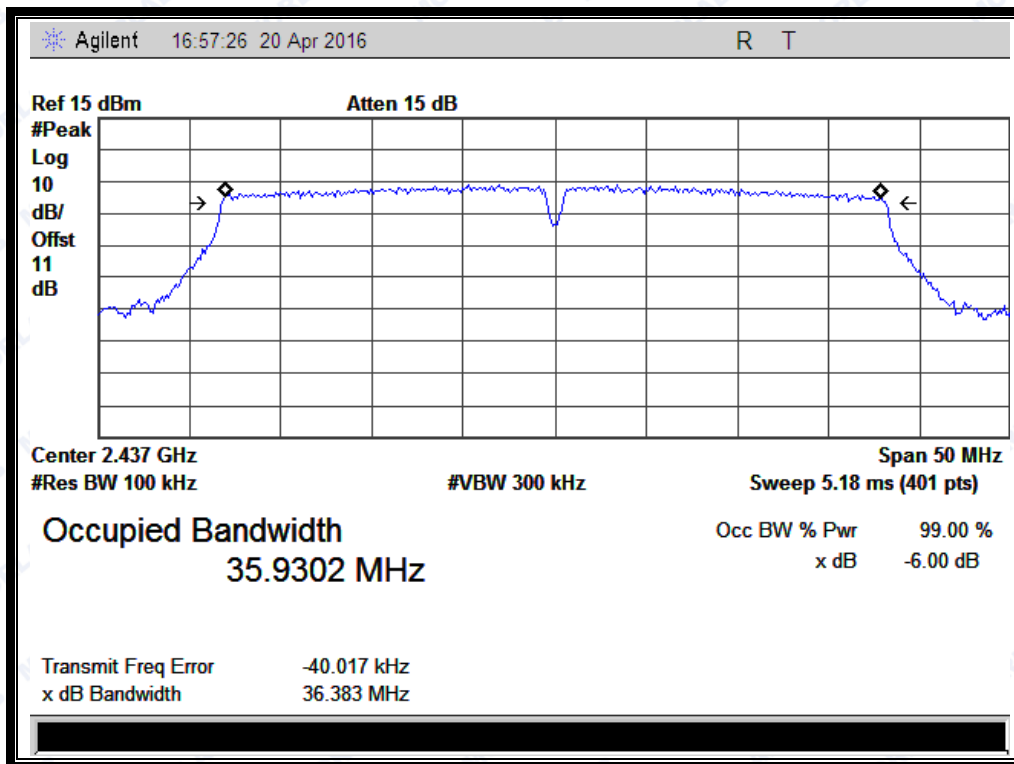

(Channel 6: 2437MHz @ 802.11n-40)

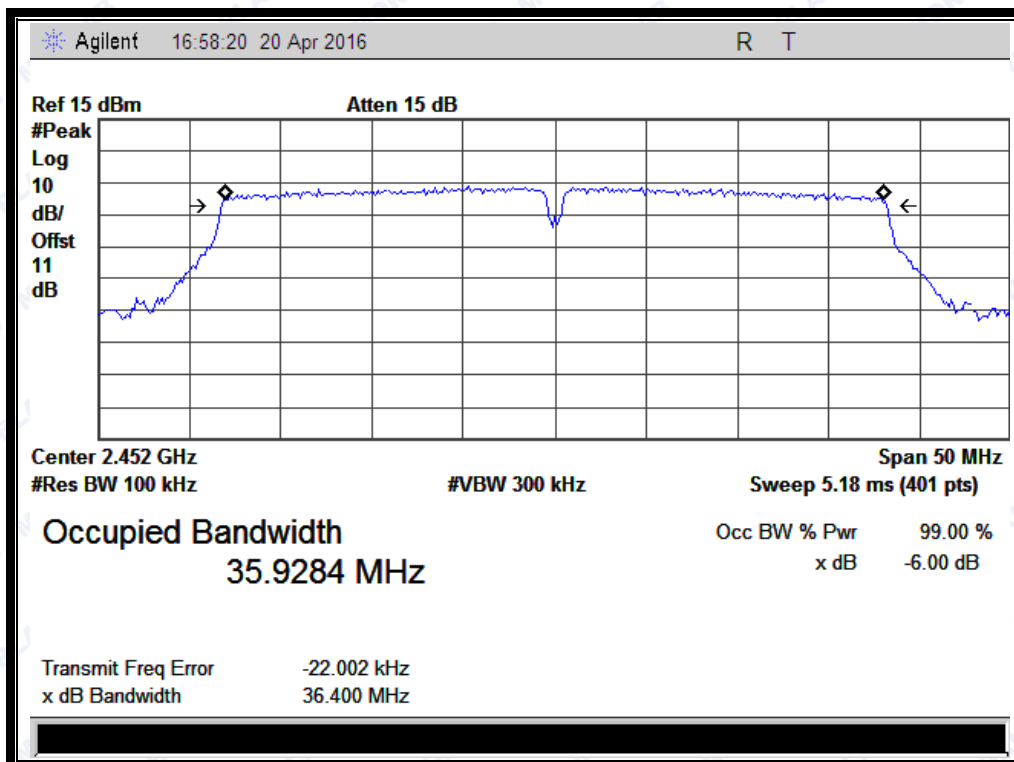

(Channel 9: 2452MHz @ 802.11n-40)


2.4 Conducted Spurious Emissions and Band Edge

2.4.1 Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.4.2 Test Description

A. Test Set:

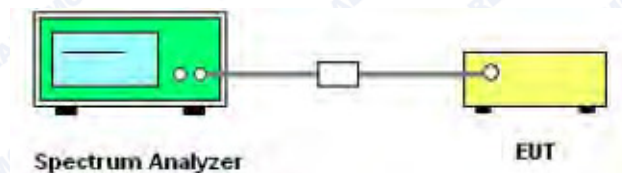

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

KDB 558074 Section 11.0 was used in order to prove compliance.

B. Equipments List:

Please reference ANNEX A(1.5).

2.4.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.




2.4.3.1 802.11b Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-38.92	2.31	-17.69	PASS
6	2437	-40.28	2.77	-17.23	PASS
11	2462	-41.13	1.63	-18.37	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

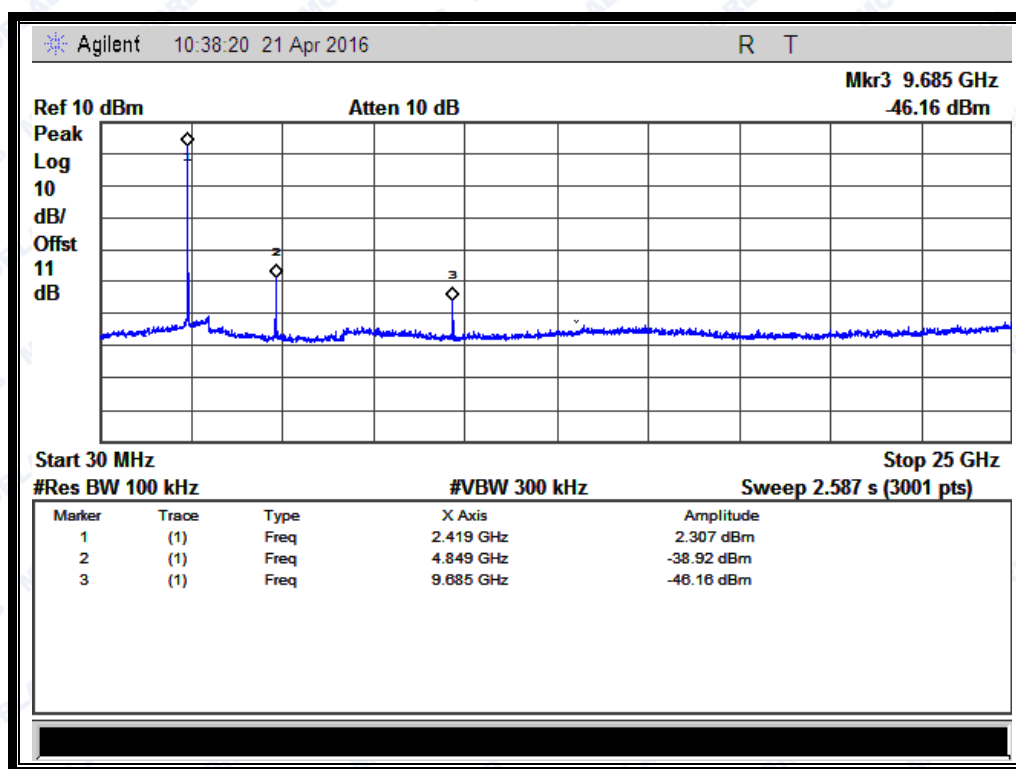


(Channel = 1, 30MHz to 25GHz)



REPORT No.: SZ16020003W03

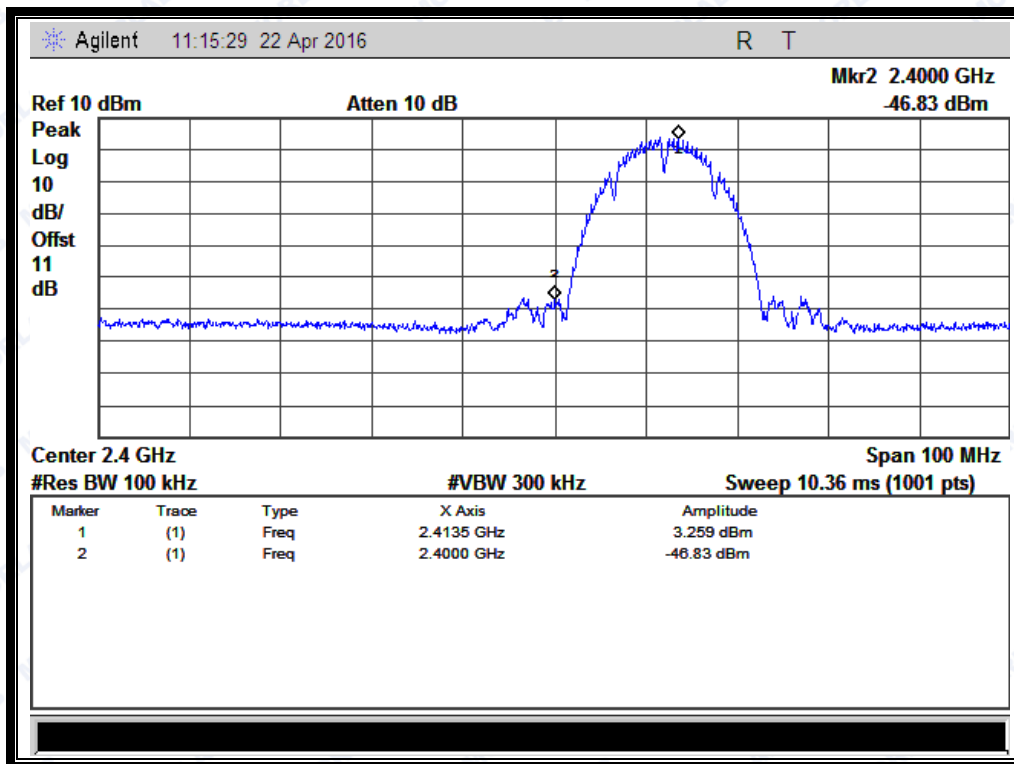


(Band Edge @ Channel = 1)

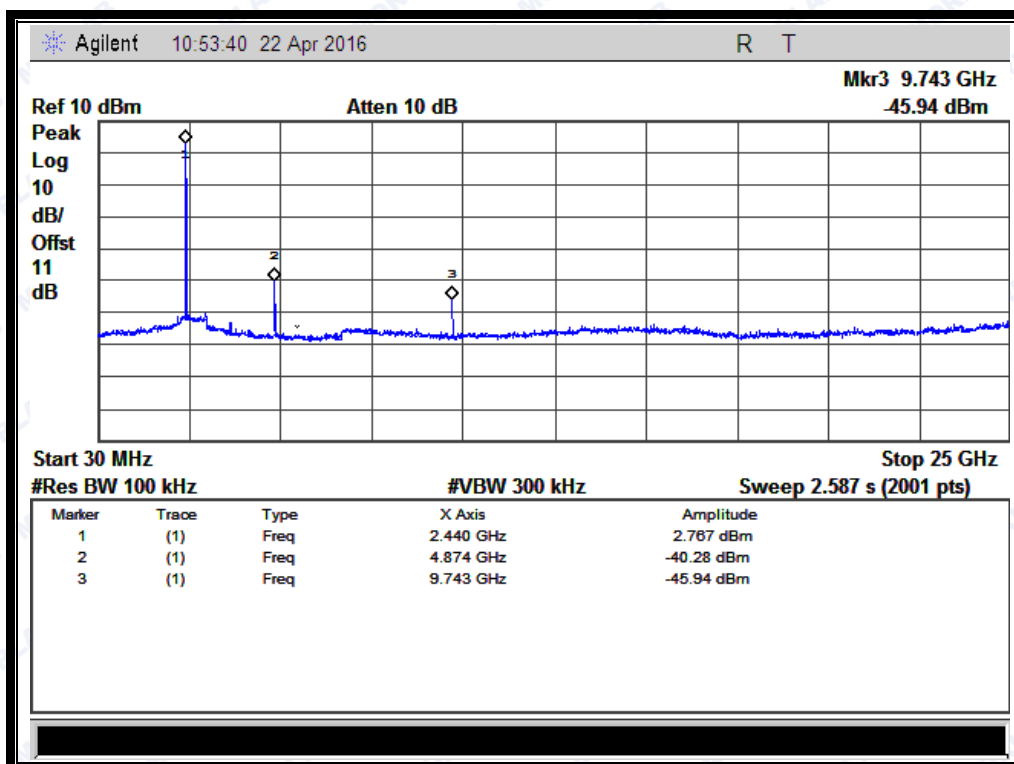


(Channel = 6, 30MHz to 25GHz)



REPORT No.: SZ16020003W03

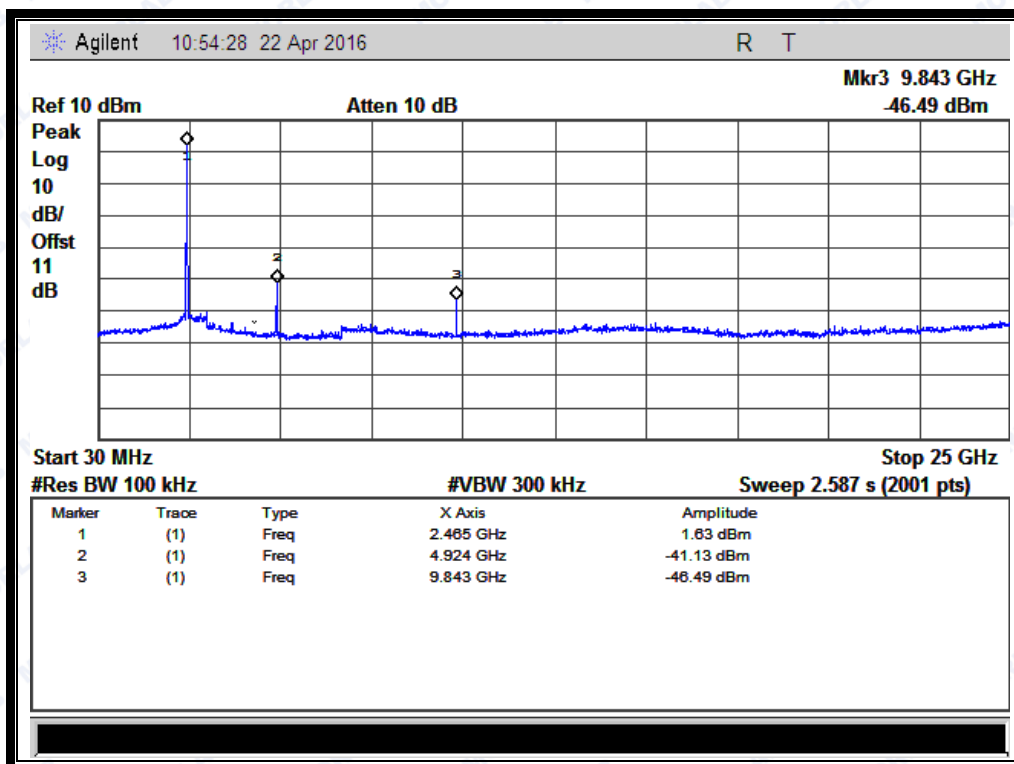

(Channel = 11, 30MHz to 25GHz)

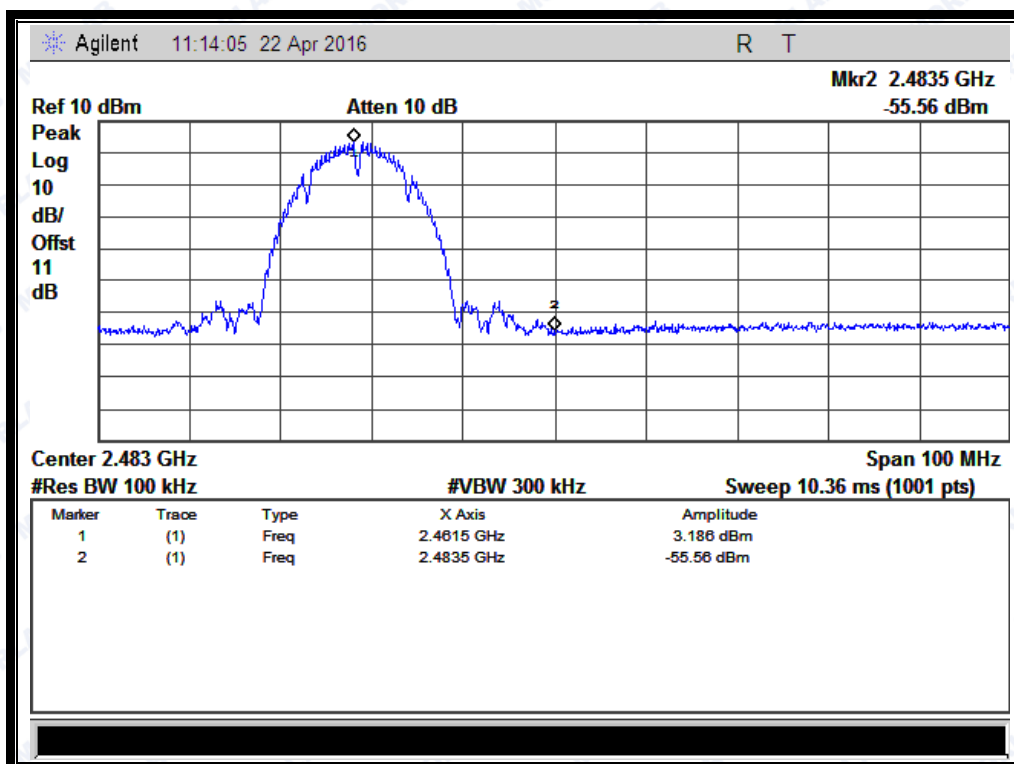

(Band Edge @ Channel = 11)




REPORT No.: SZ16020003W03

2.4.3.2 802.11g Test mode**A. Test Verdict:**

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-46.03	-3.40	-23.40	PASS
6	2437	-46.17	-2.77	-22.77	PASS
11	2462	-46.69	-3.47	-23.47	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

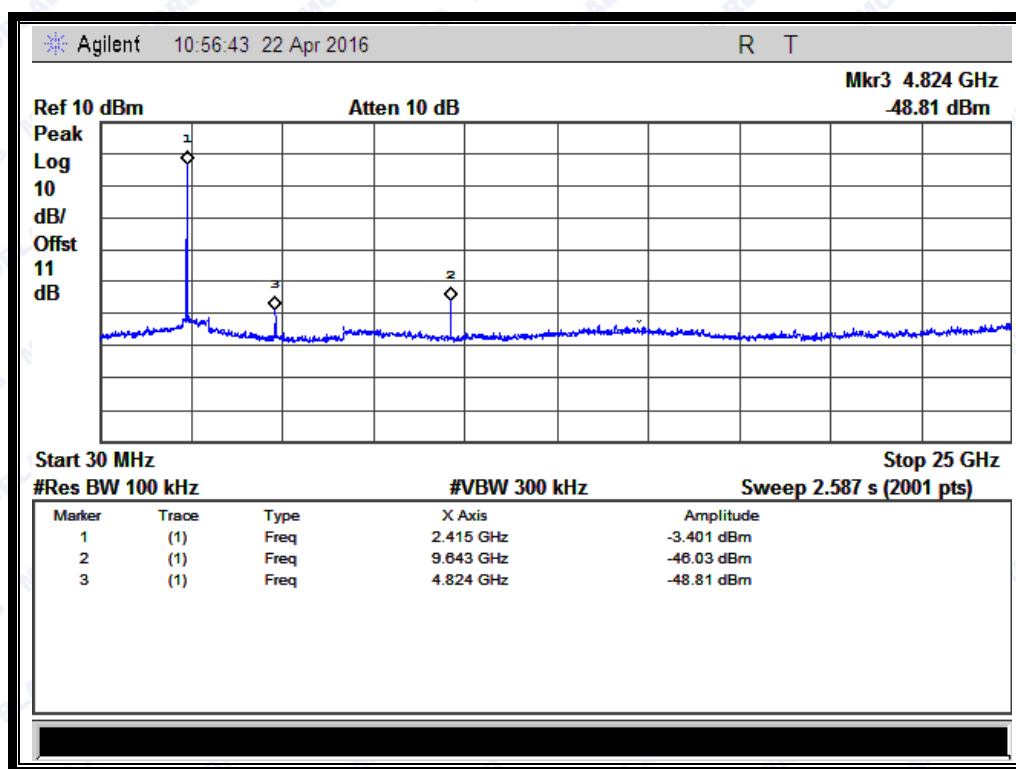


(Channel = 1, 30MHz to 25GHz)



REPORT No.: SZ16020003W03

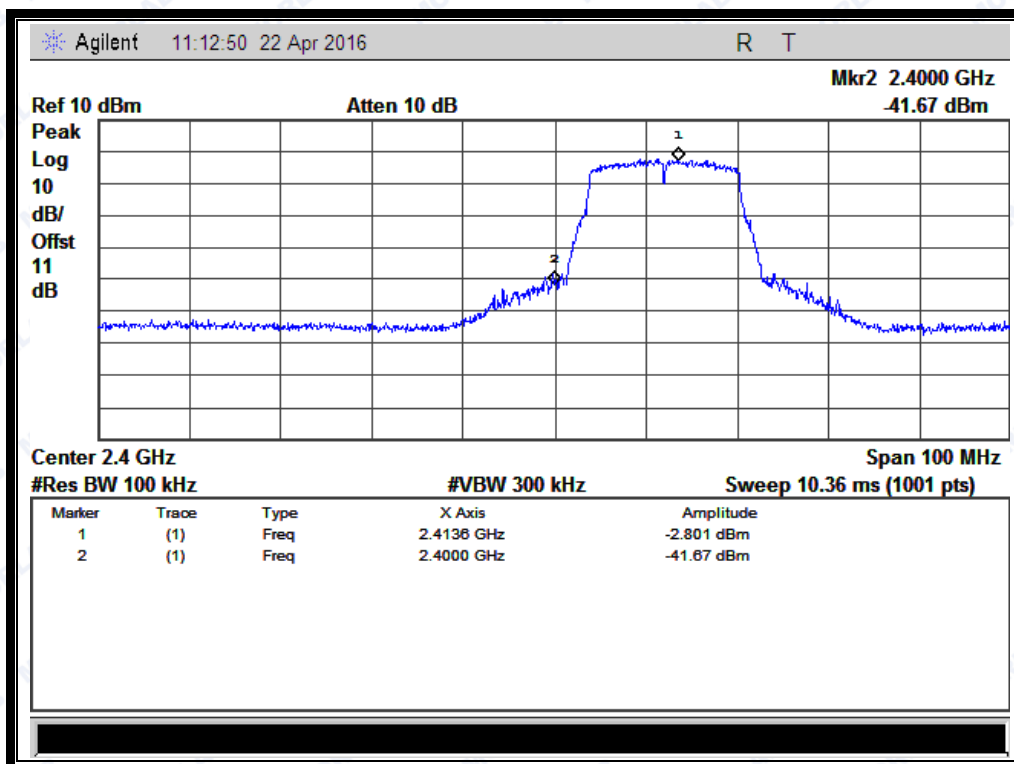


(Band Edge @ Channel = 1)

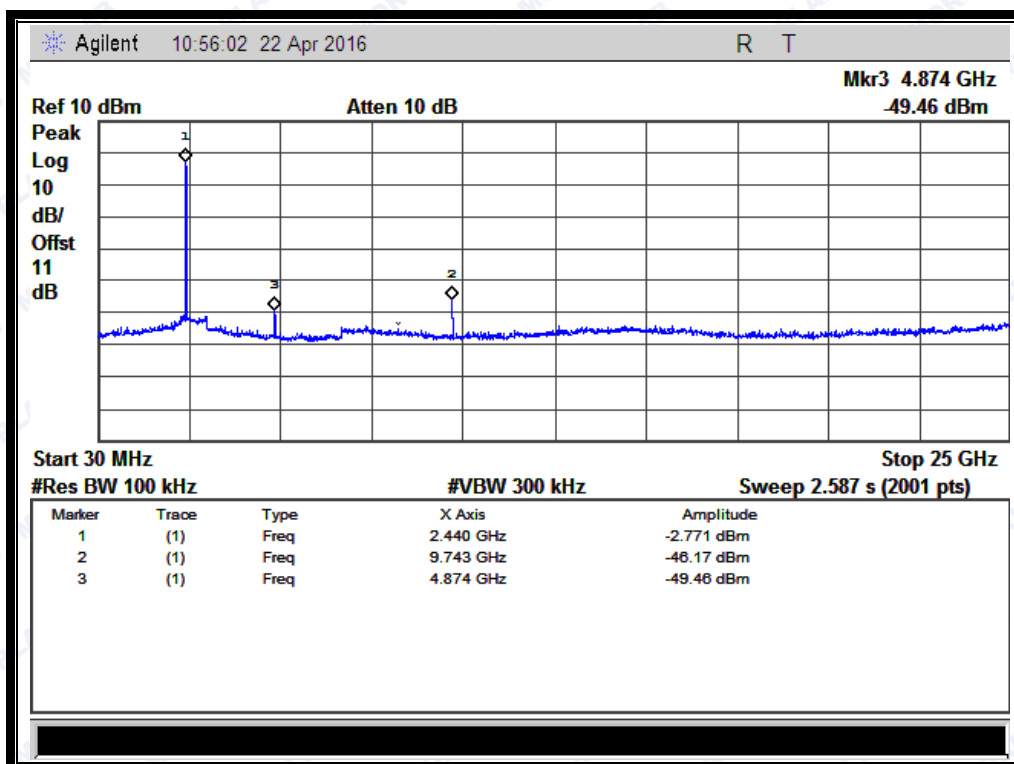


(Channel = 6, 30MHz to 25GHz)



REPORT No.: SZ16020003W03

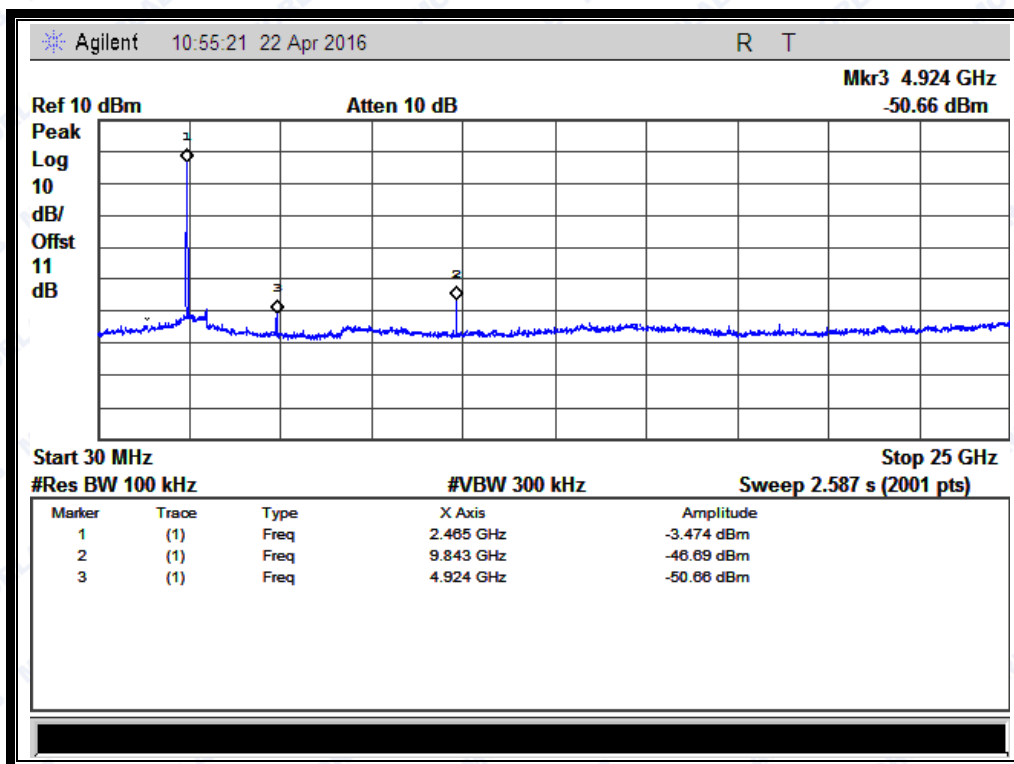

(Channel = 11, 30MHz to 25GHz)

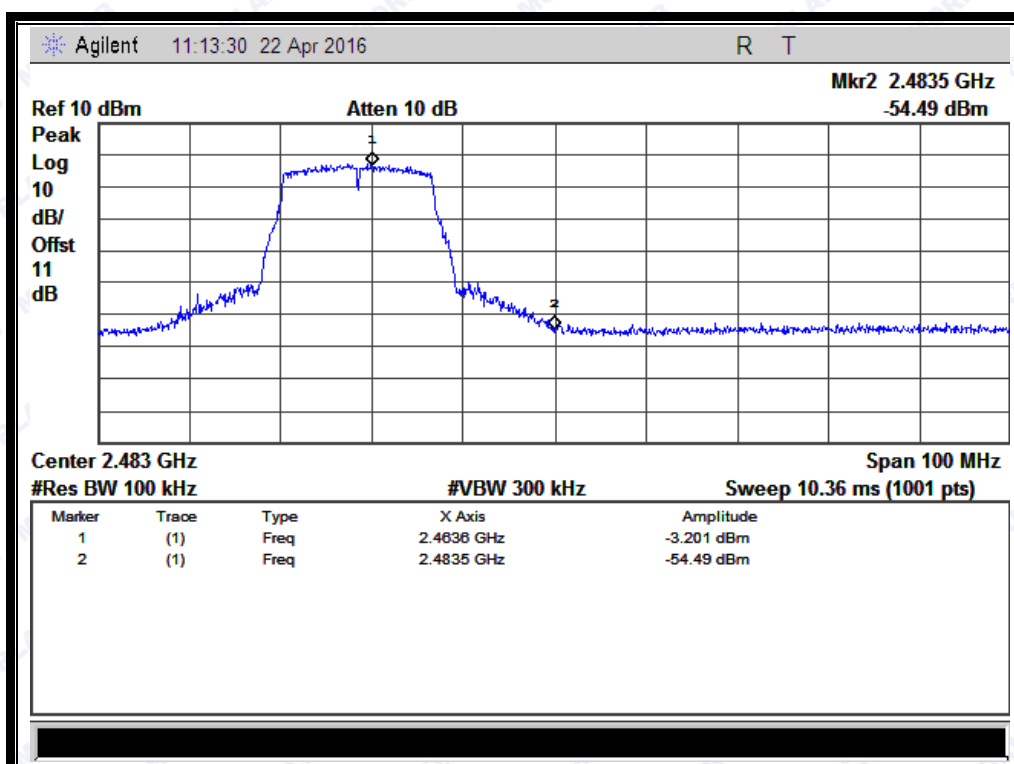

(Band Edge @ Channel = 11)




2.4.3.3 802.11n -20MHz Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-45.64	-2.93	-22.93	PASS
6	2437	-50.59	-3.72	-23.72	PASS
11	2462	-46.64	-4.55	-24.55	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

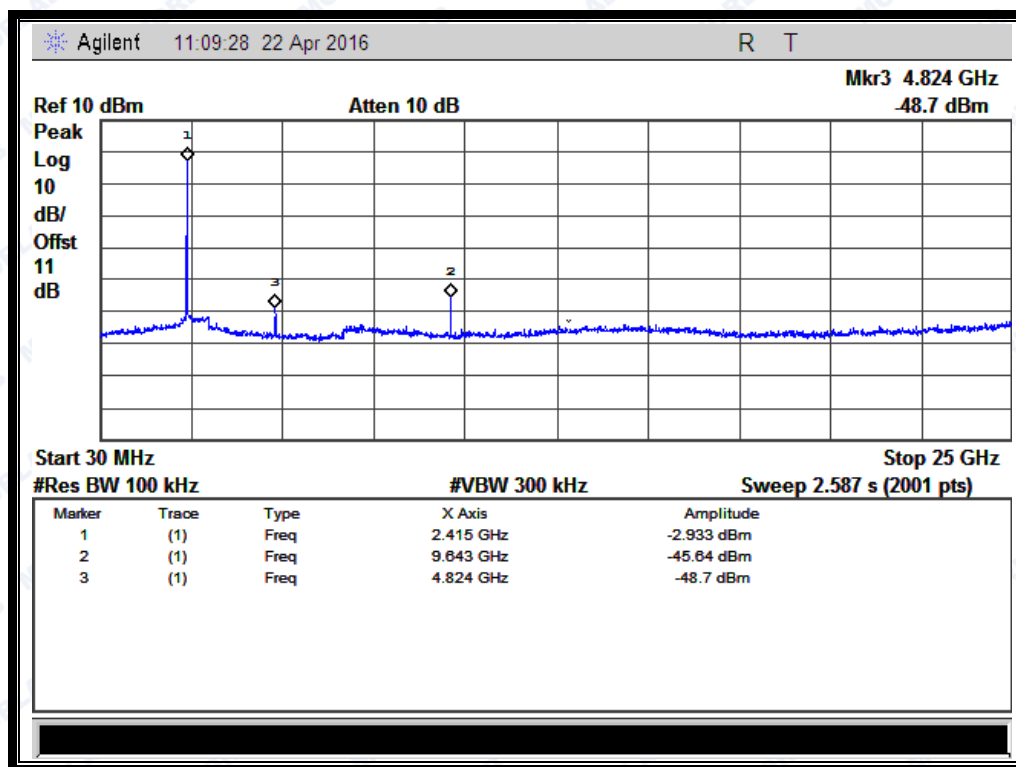


(Channel = 1, 30MHz to 25GHz)



REPORT No.: SZ16020003W03

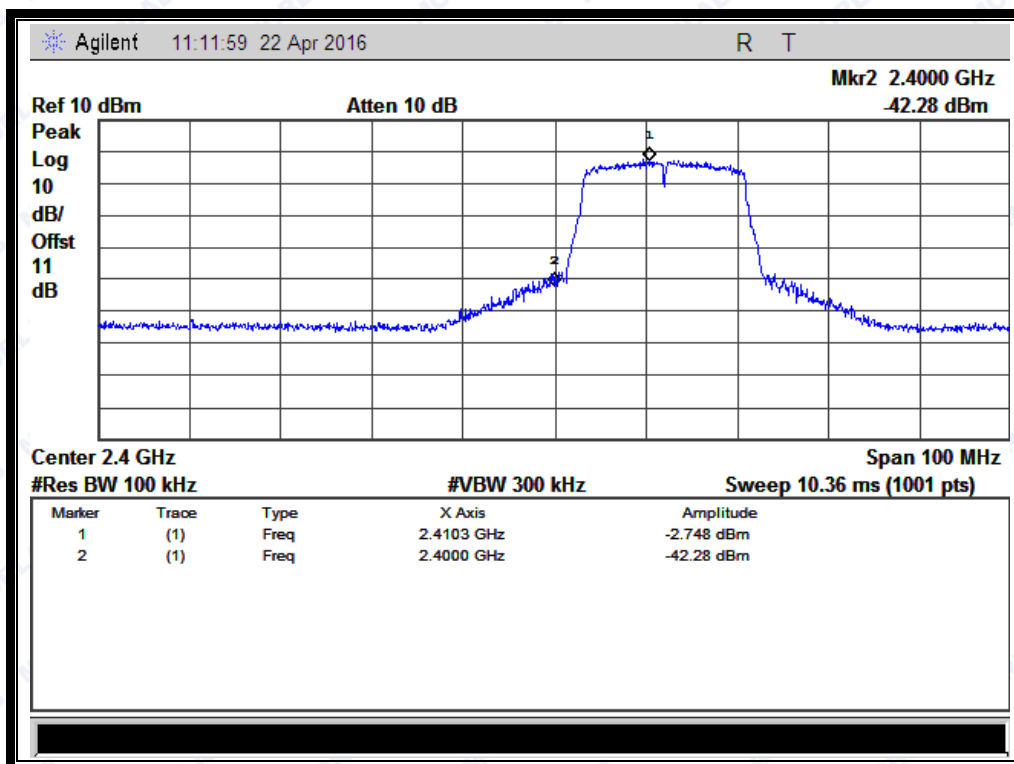


(Band Edge @ Channel = 1)

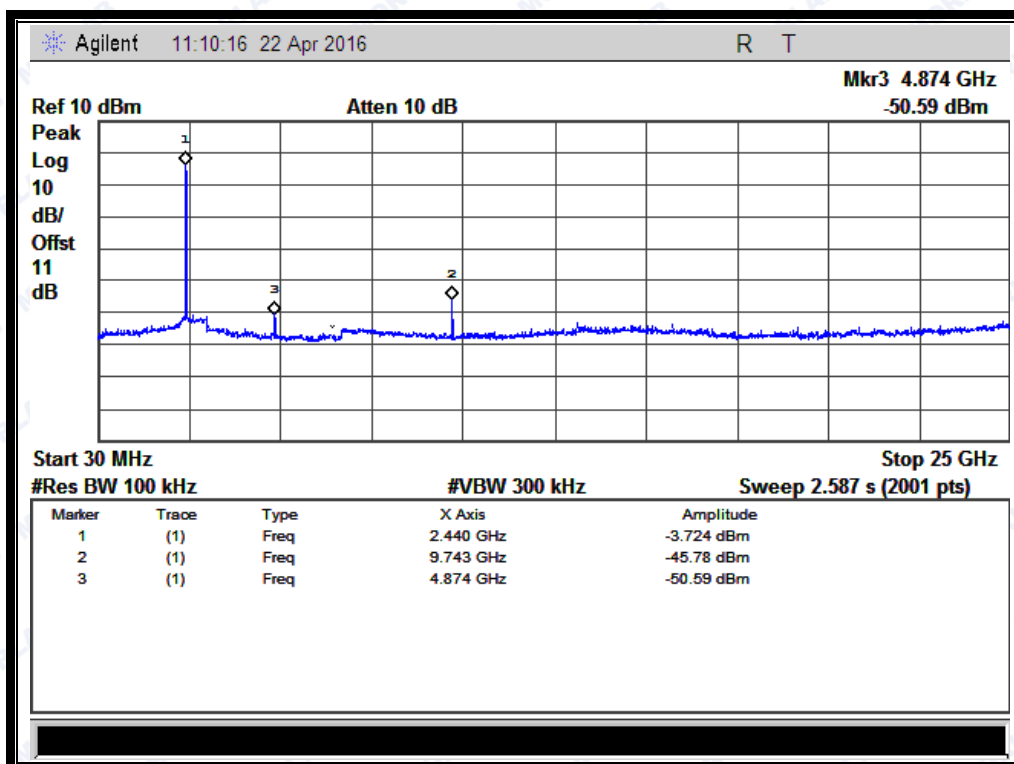


(Channel = 6, 30MHz to 25GHz)



REPORT No.: SZ16020003W03

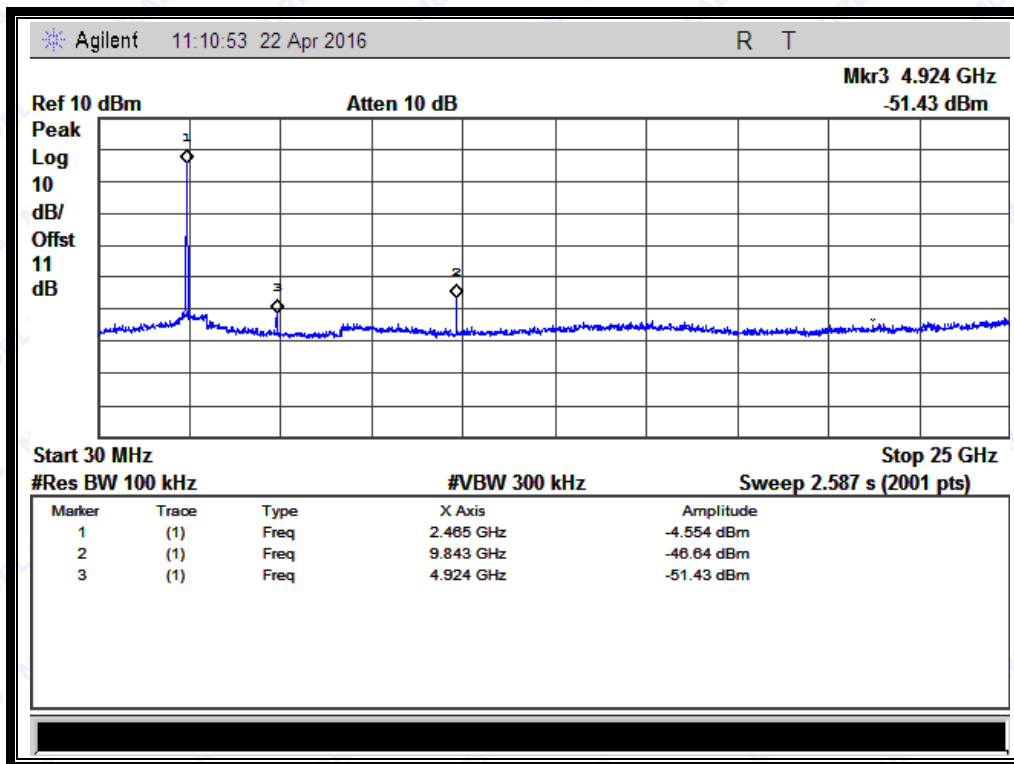

(Channel = 11, 30MHz to 25GHz)

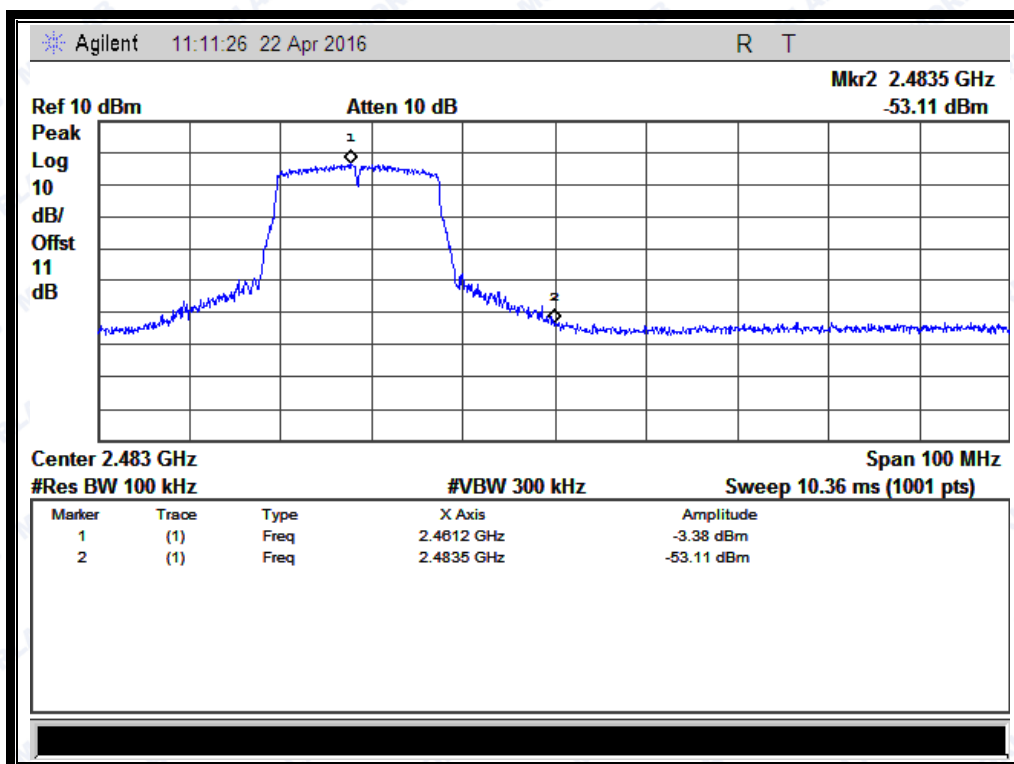

(Band Edge @ Channel = 11)




2.4.3.4 802.11n -40MHz Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
3	2422	-45.76	-6.68	-26.68	PASS
6	2437	-45.85	-7.00	-27.00	PASS
9	2452	-45.89	-6.79	-26.79	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

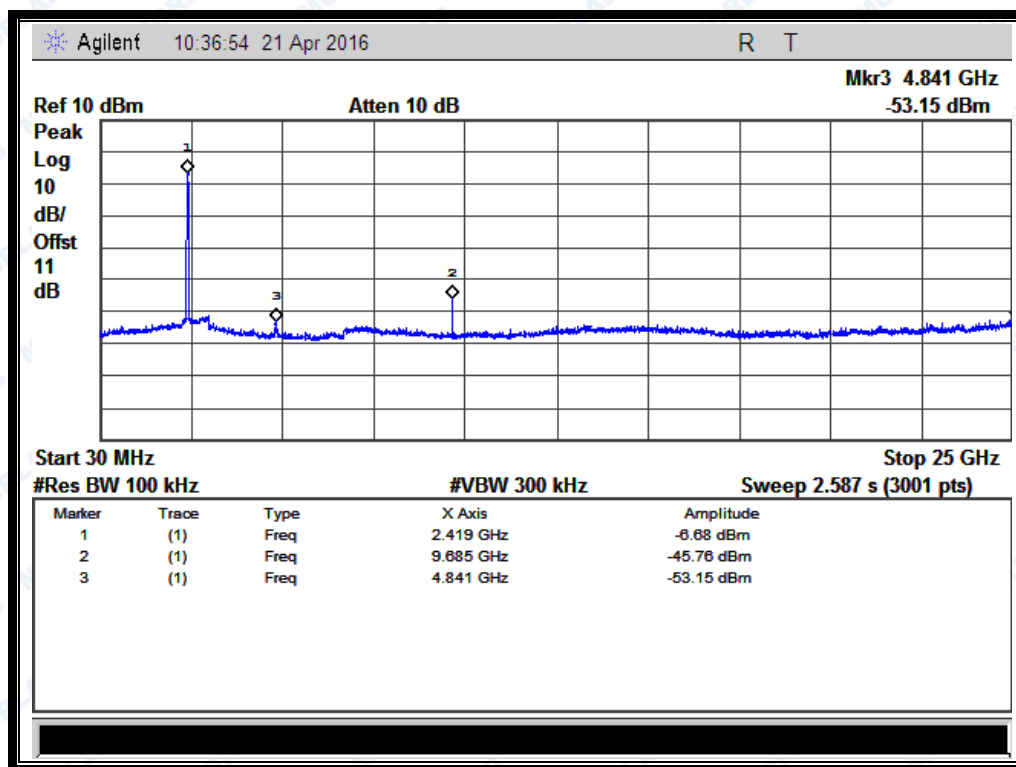


(Channel = 3, 30MHz to 25GHz)



REPORT No.: SZ16020003W03

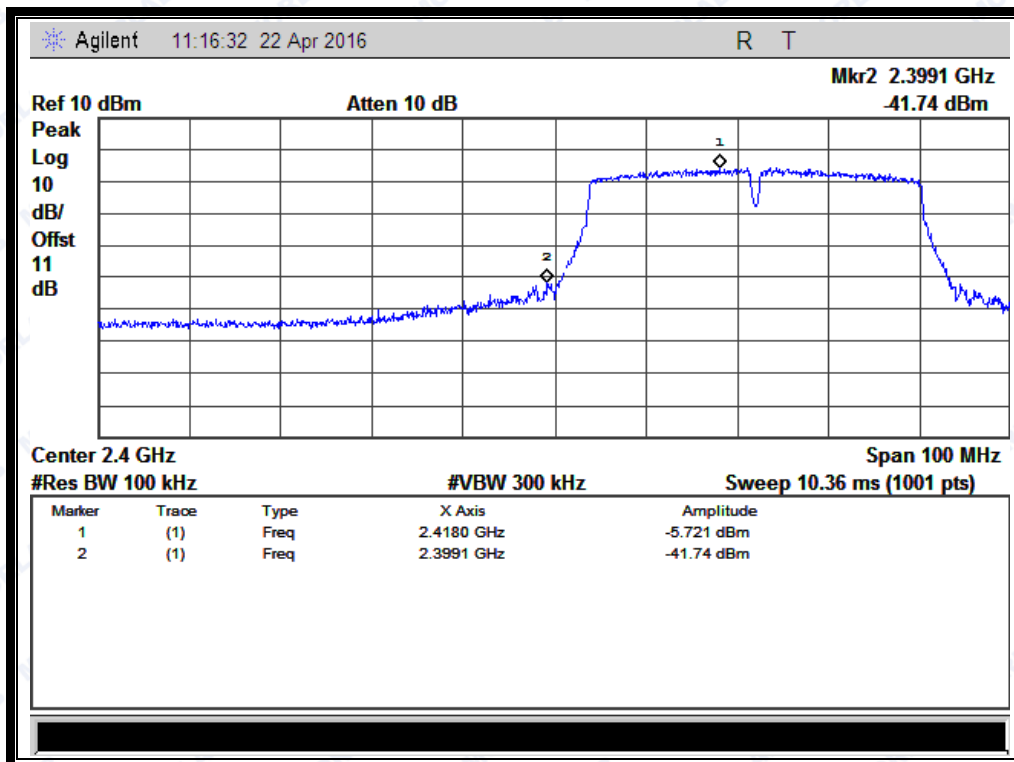


(Band Edge @ Channel = 3)

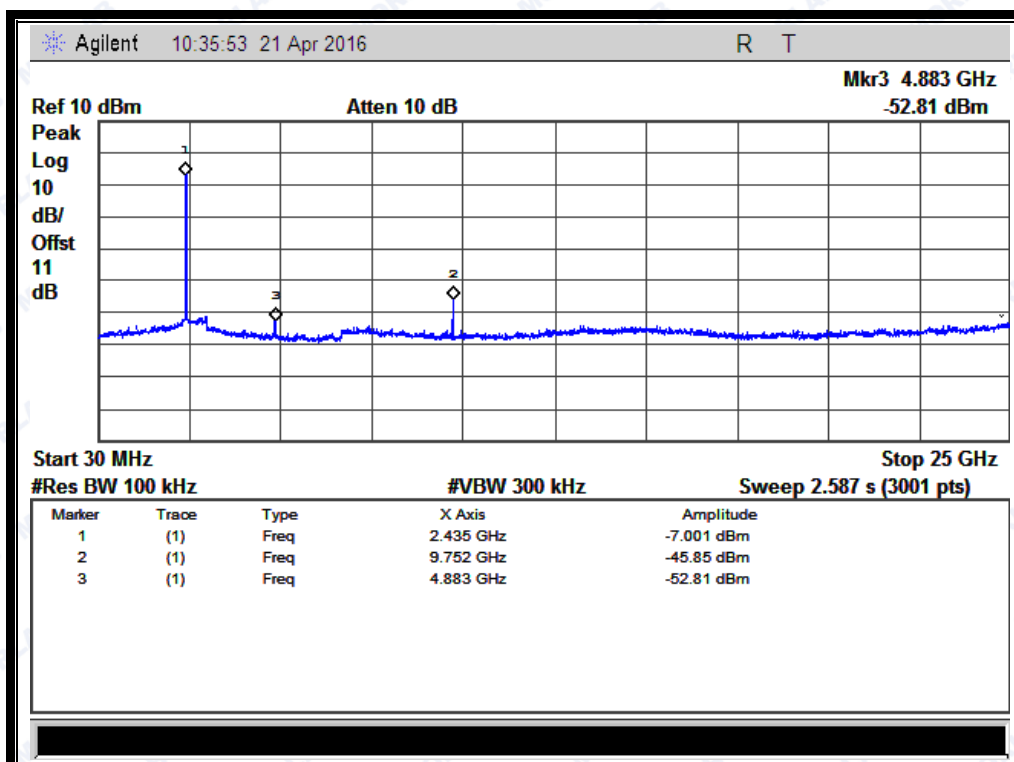


(Channel = 6, 30MHz to 25GHz)



REPORT No.: SZ16020003W03

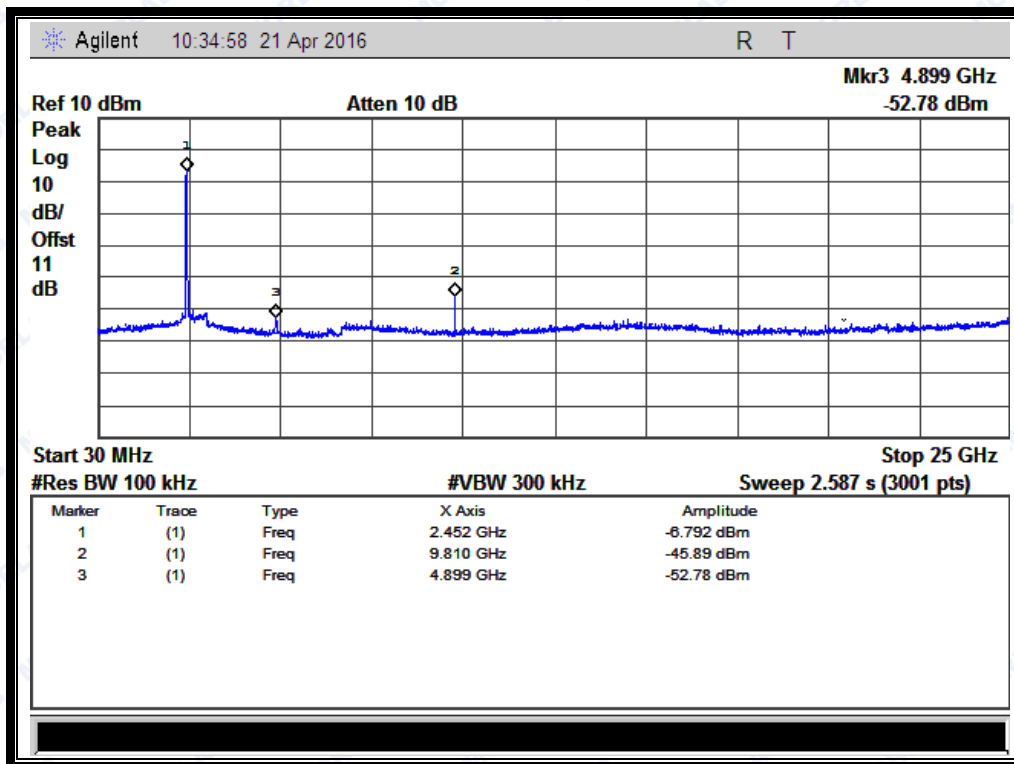

(Channel = 9, 30MHz to 25GHz)

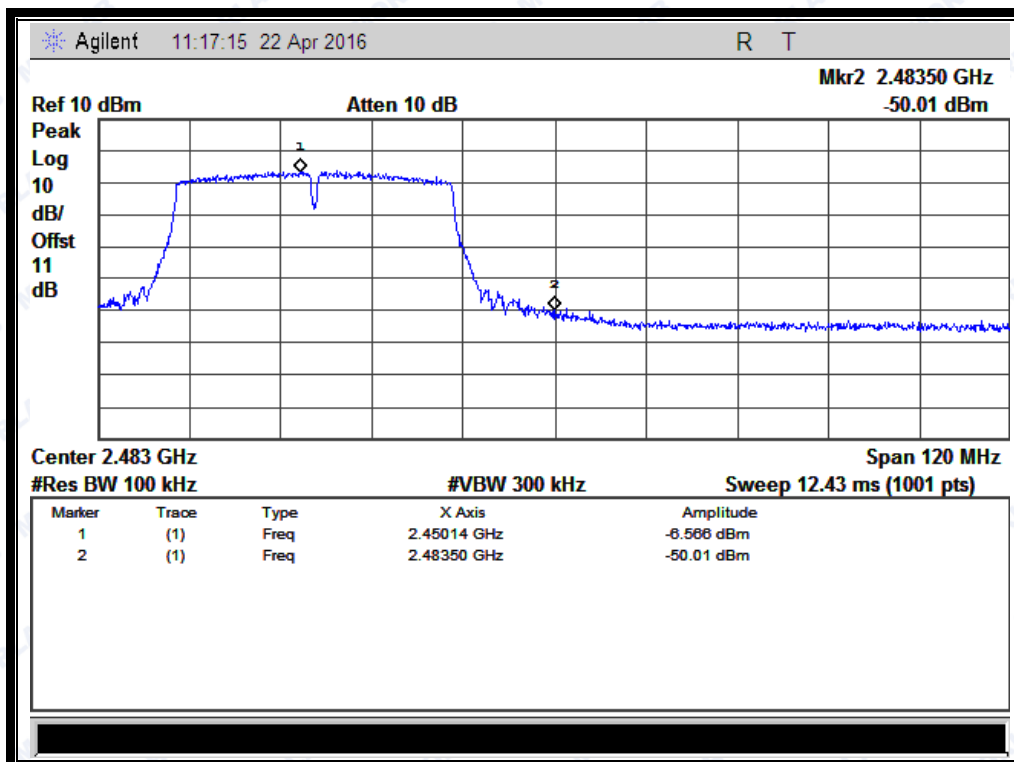

(Band Edge @ Channel = 9)

2.5 Power spectral density (PSD)

2.5.1 Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.


2.5.2 Test Description

A. Test procedure

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- Set analyzer center frequency to channel center frequency.
- Set the span to 3MHz
- Set the RBW to 3 kHz
- Set the VBW to 10KHz
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

B. Test Set:

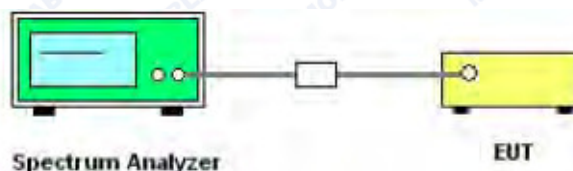

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

KDB 558074 Section 10.2 was used in order to prove compliance.

C. Equipments List:

Please reference ANNEX A(1.5).



REPORT No.: SZ16020003W03


2.5.3 Test Result

2.5.3.1 802.11b Test mode

A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-9.81	8	PASS
6	2437	-9.31	8	PASS
11	2462	-9.45	8	PASS
Measurement uncertainty: ± 1.3 dB				


B. Test Plots:

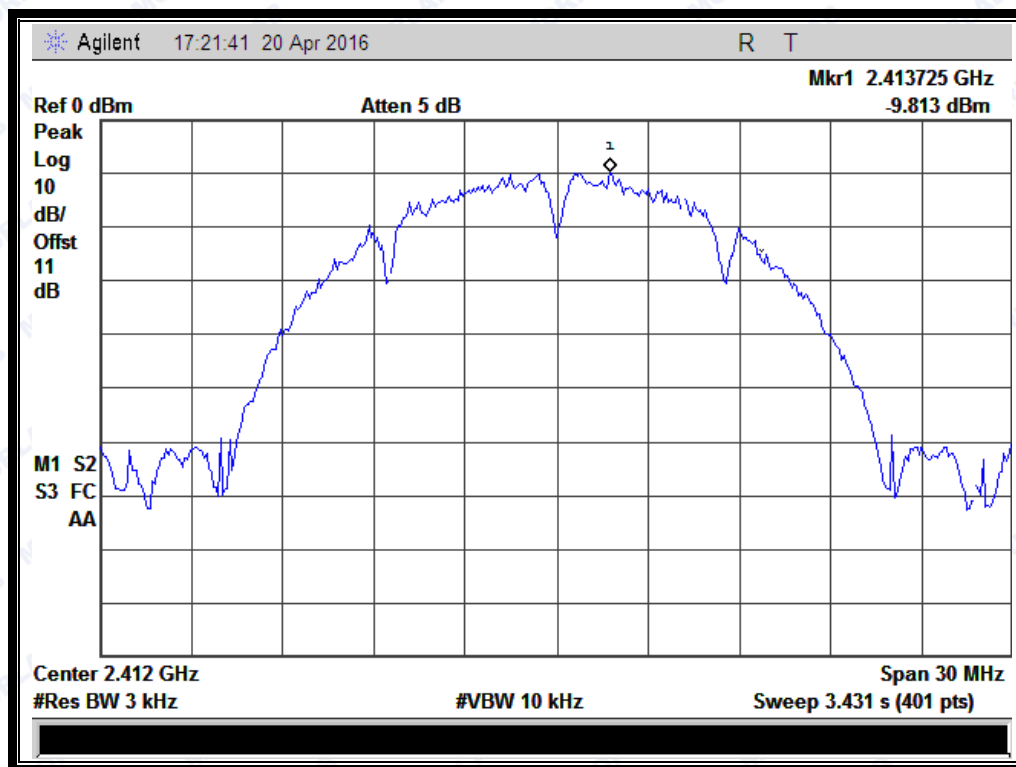


(Channel = 1 @ 802.11b)



REPORT No.: SZ16020003W03

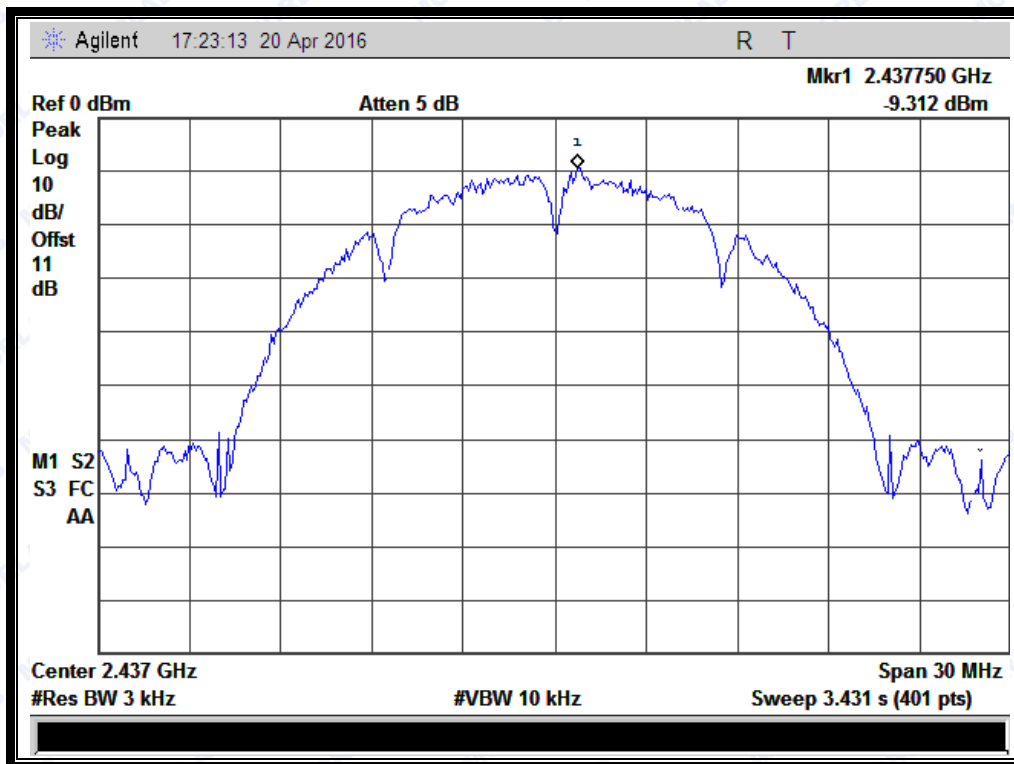

(Channel = 6 @ 802.11b)

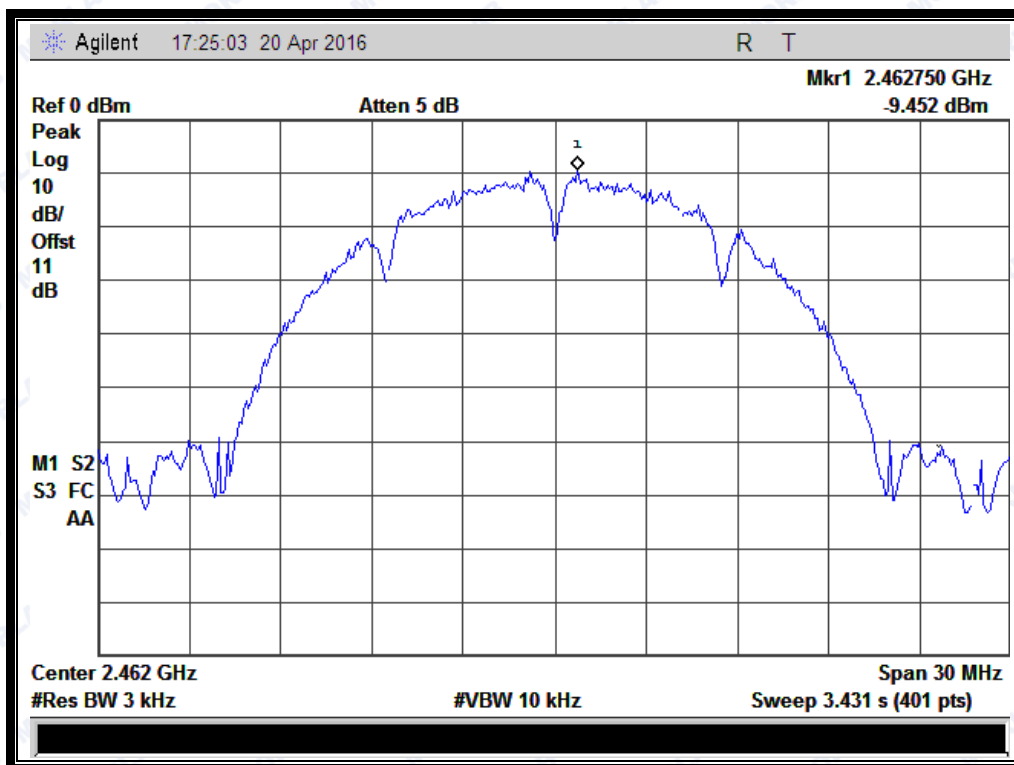

(Channel = 11 @ 802.11b)




2.5.3.2 802.11g Test mode

A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-14.10	8	PASS
6	2437	-13.75	8	PASS
11	2462	-14.49	8	PASS
Measurement uncertainty: ± 1.3 dB				


B. Test Plots:

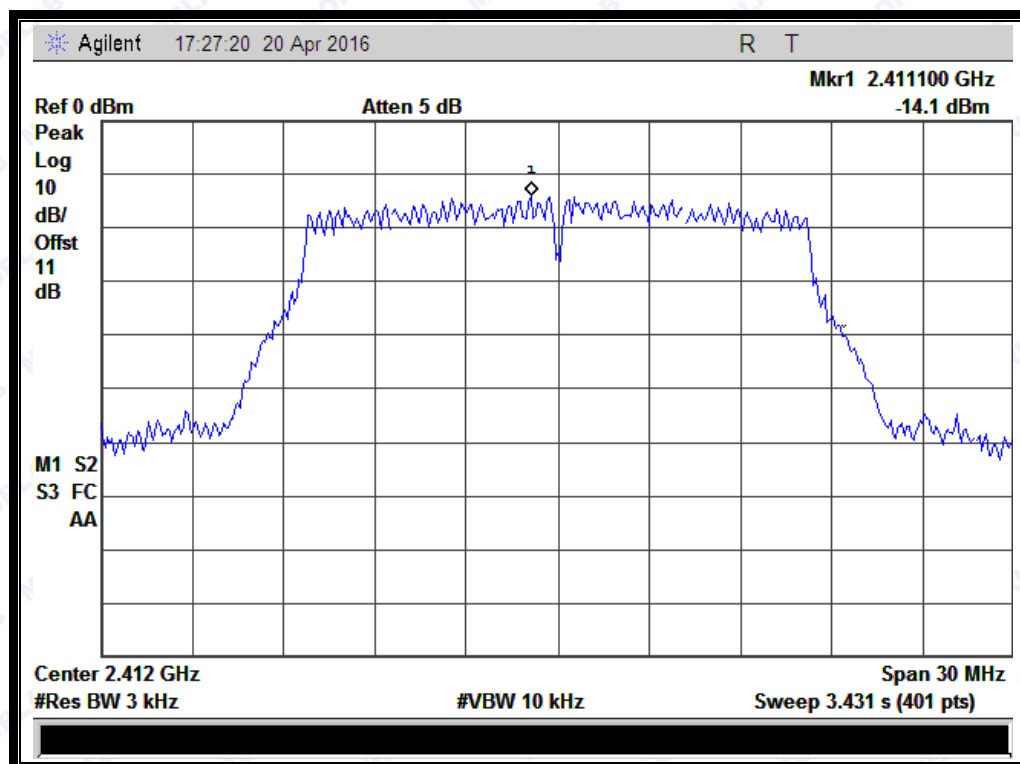


(Channel = 1 @ 802.11g)



REPORT No.: SZ16020003W03

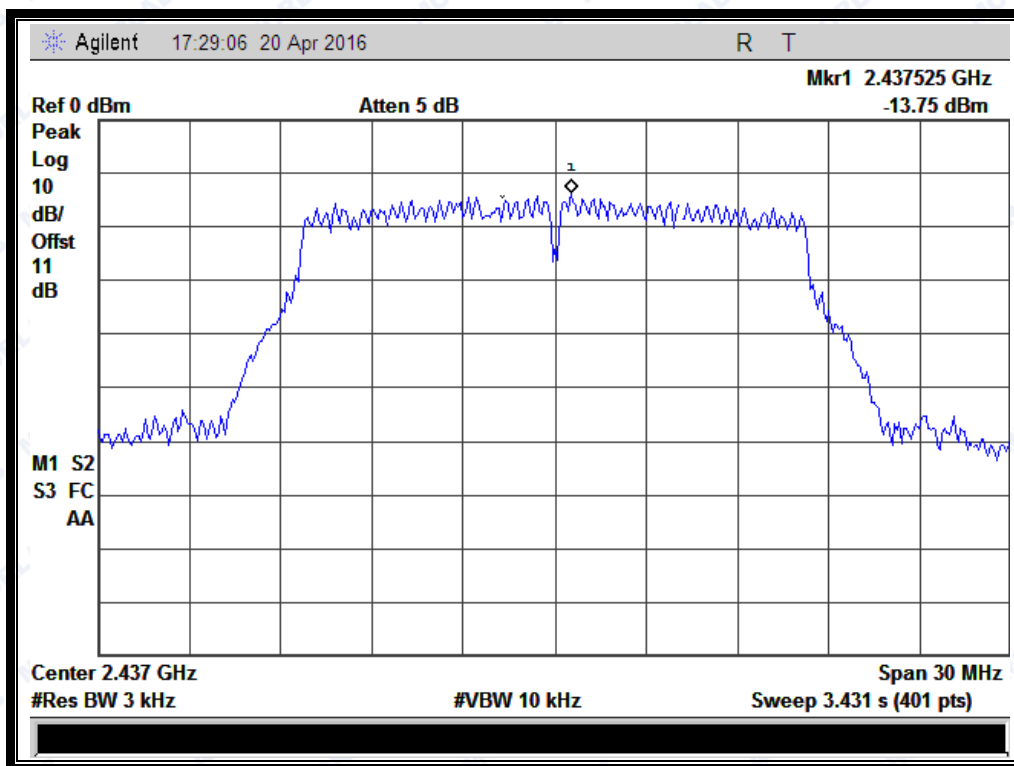

(Channel = 6 @ 802.11g)

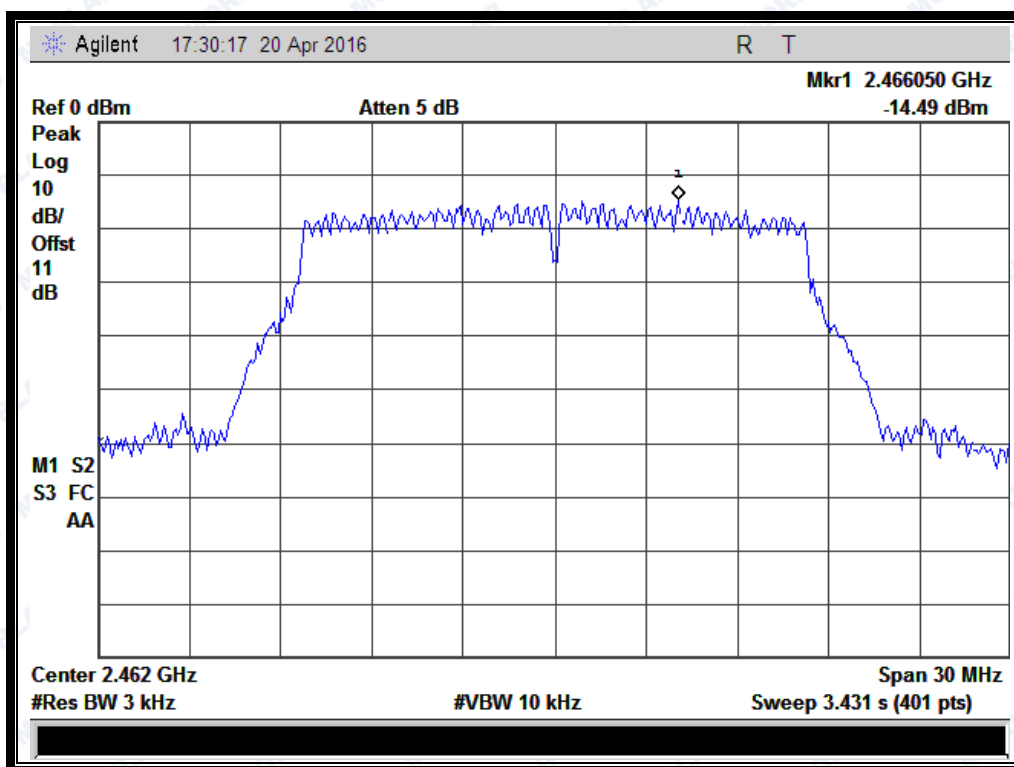

(Channel = 11 @ 802.11g)




REPORT No.: SZ16020003W03

2.5.3.3 802.11n-20MHz Test mode

A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-14.26	8	PASS
6	2437	-14.38	8	PASS
11	2462	-15.03	8	PASS
Measurement uncertainty: $\pm 1.3\text{dB}$				


B. Test Plots:

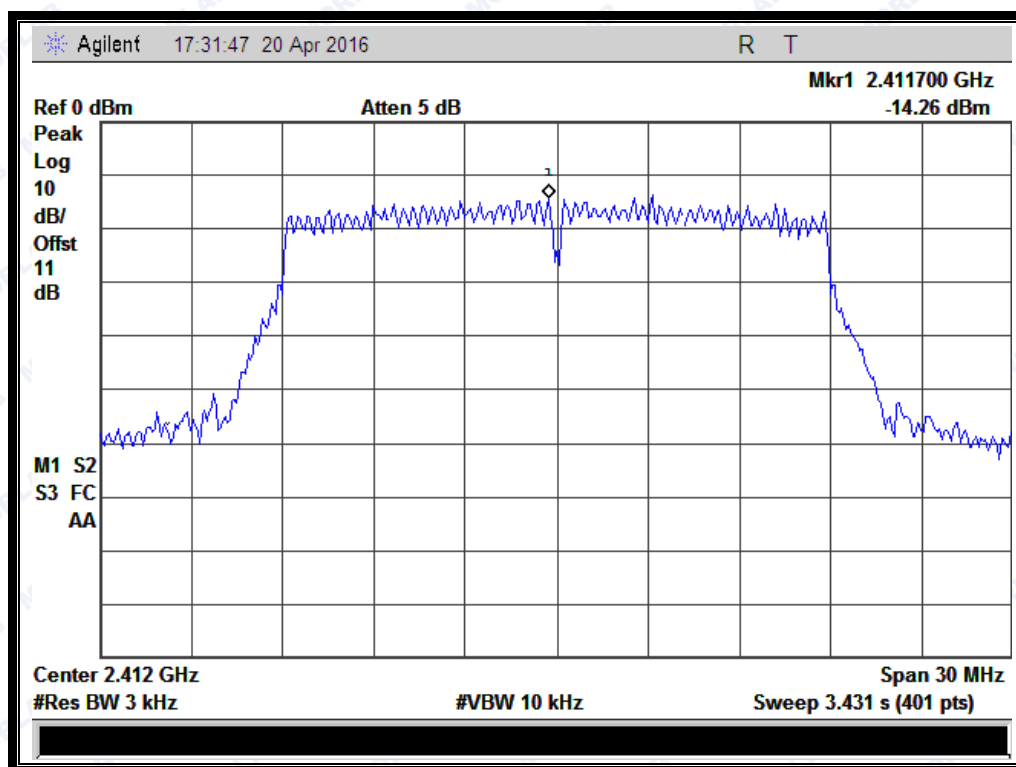


(Channel = 1 @ 802.11n-20MHz)



REPORT No.: SZ16020003W03

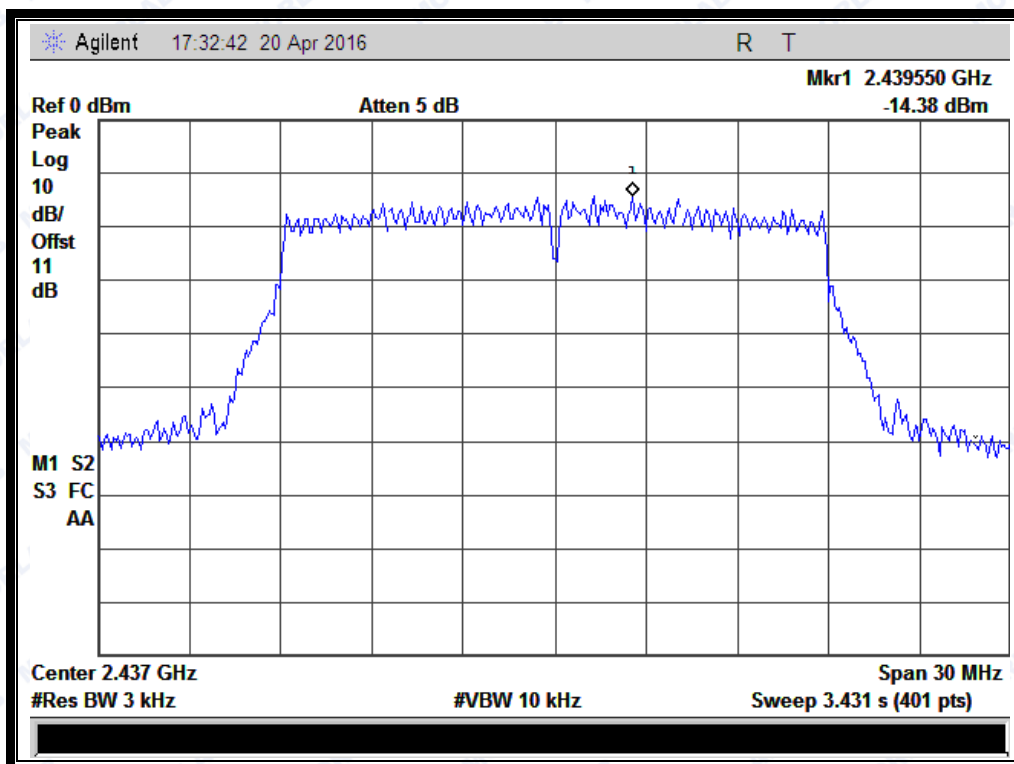

(Channel = 6 @ 802.11n-20MHz)

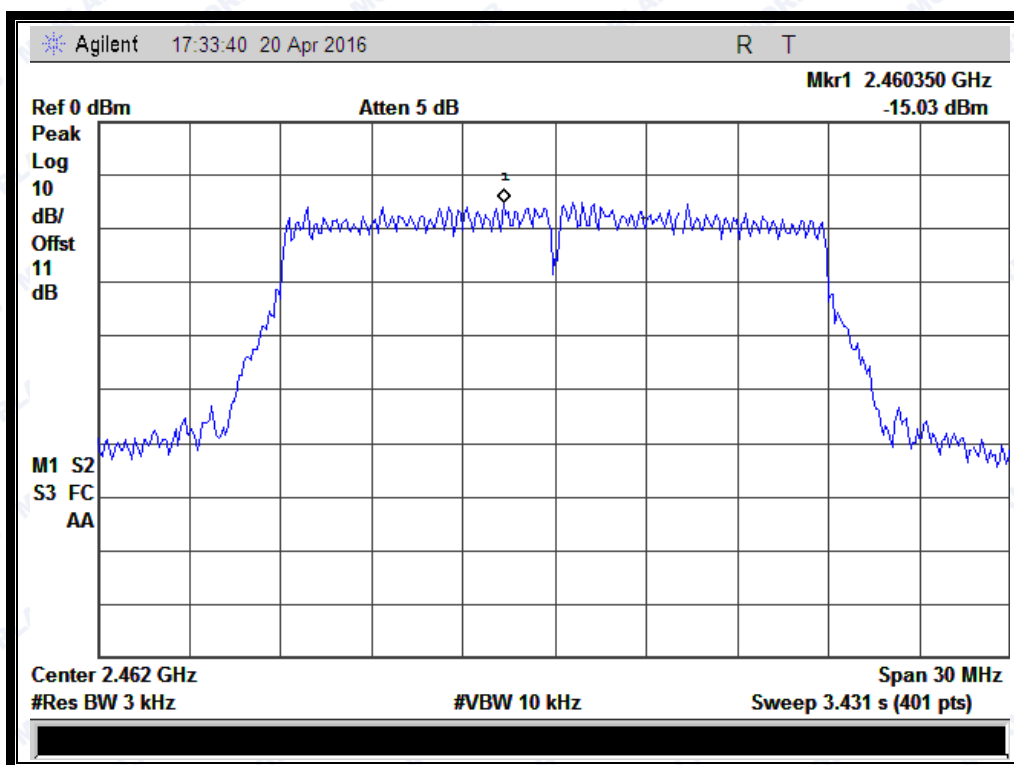

(Channel = 11 @ 802.11n-20MHz)




2.5.3.4 802.11n-40MHz Test mode

A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
3	2422	-17.05	8	PASS
6	2437	-16.48	8	PASS
9	2452	-17.49	8	PASS
Measurement uncertainty: ± 1.3 dB				


B. Test Plots:

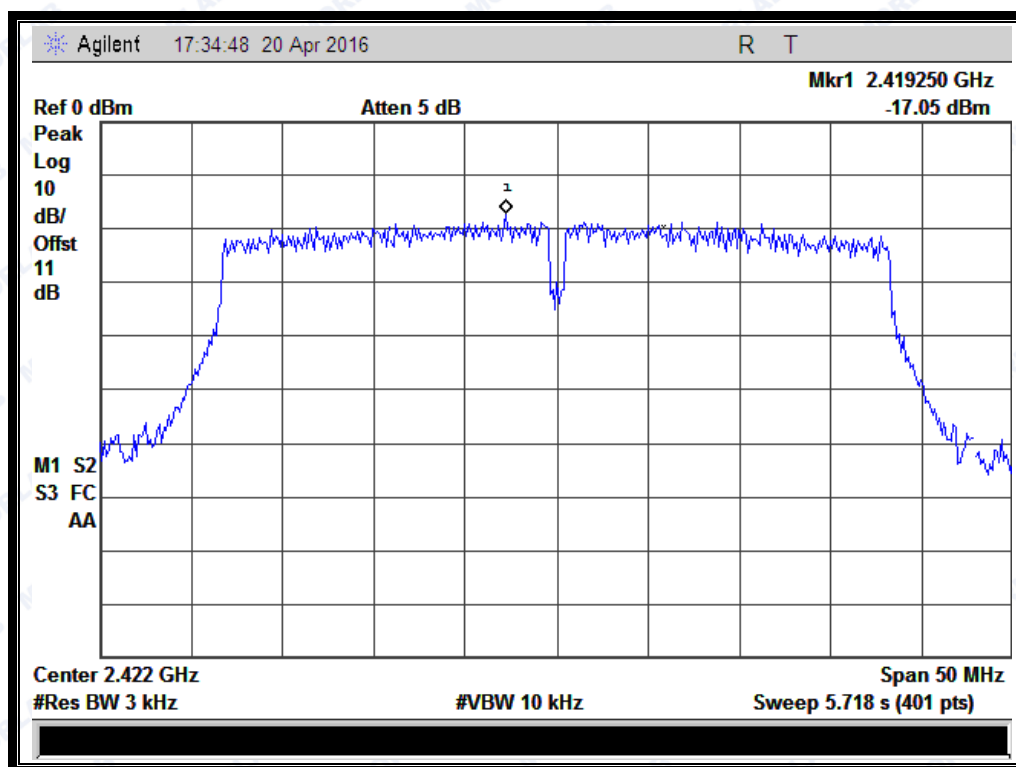


(Channel = 3 @ 802.11n-40MHz)



REPORT No.: SZ16020003W03

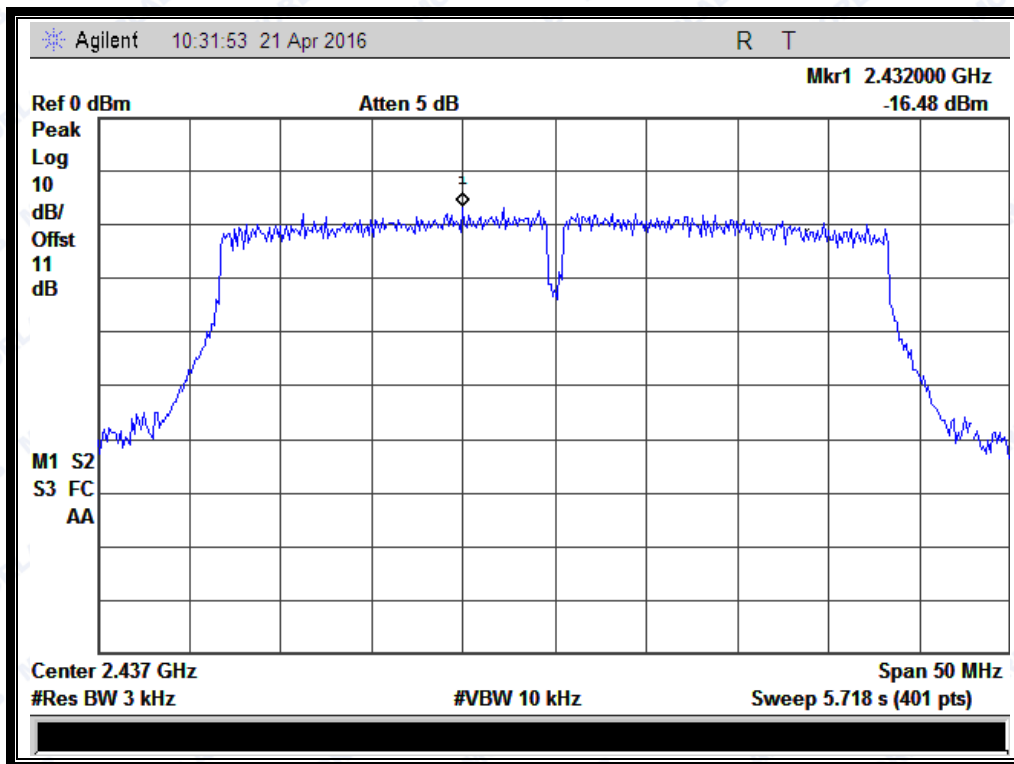

(Channel = 6 @ 802.11n-40MHz)

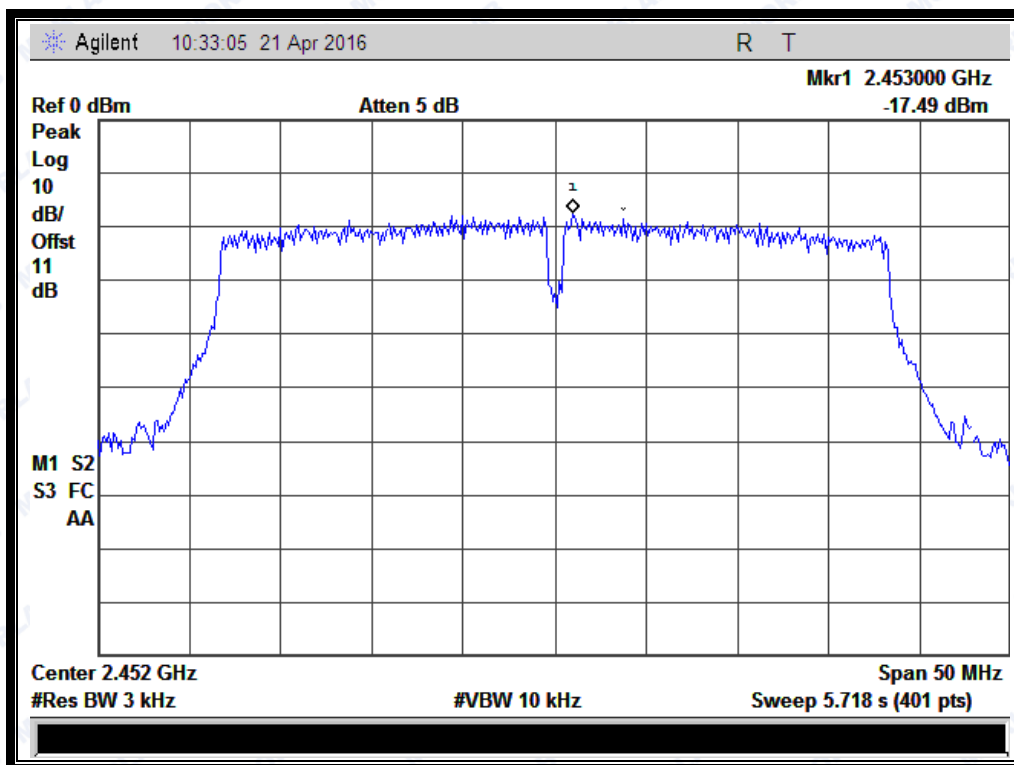

(Channel = 9 @ 802.11n-40MHz)


2.6 Restricted Frequency Bands

2.6.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.6.2 Test Description

A. Test Setup

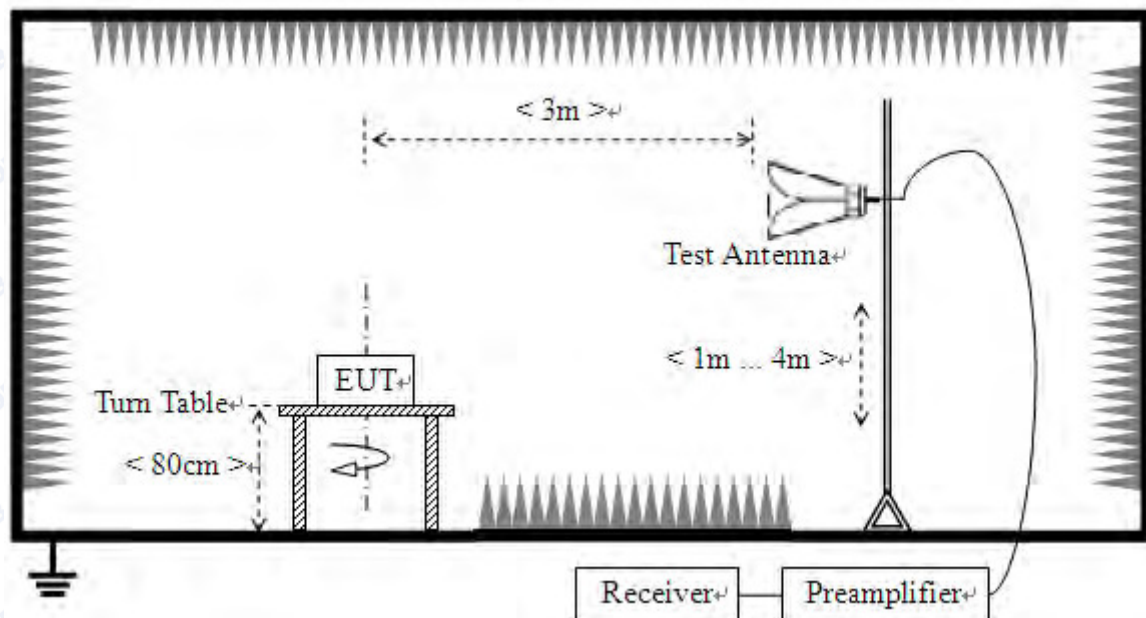

The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

KDB 558074 Section 12.1 was used in order to prove compliance.

B. Equipments List:

Please reference ANNEX A(1.5).



2.6.3 Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

2.6.3.1 802.11b Test mode

The lowest and highest channels are tested to verify the band edge emissions.


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
1	2385.67	PK	48.12	-33.63	32.56	47.05	74	Pass
1	2383.10	AV	32.87	-33.63	32.56	31.80	54	Pass
11	2487.15	PK	47.73	-33.18	32.5	47.05	74	Pass
11	2486.85	AV	32.89	-33.18	32.5	32.21	54	Pass


B. Test Plots:



REPORT No.: SZ16020003W03

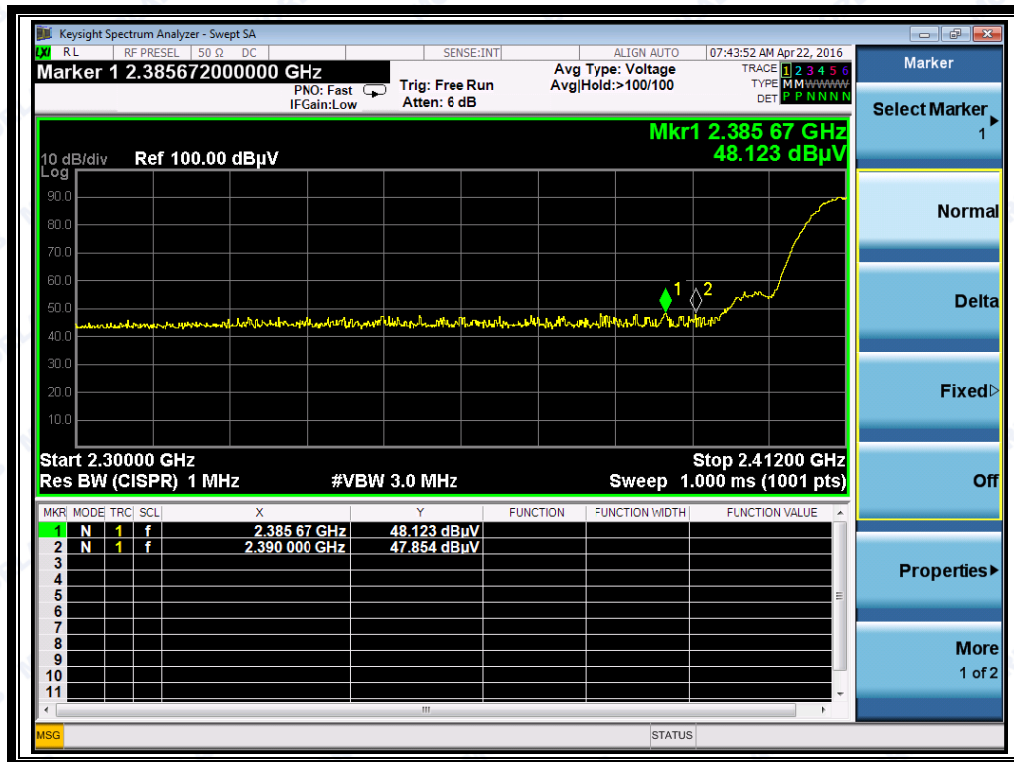

(Plot A1: Channel = 1 PEAK @ 802.11b)

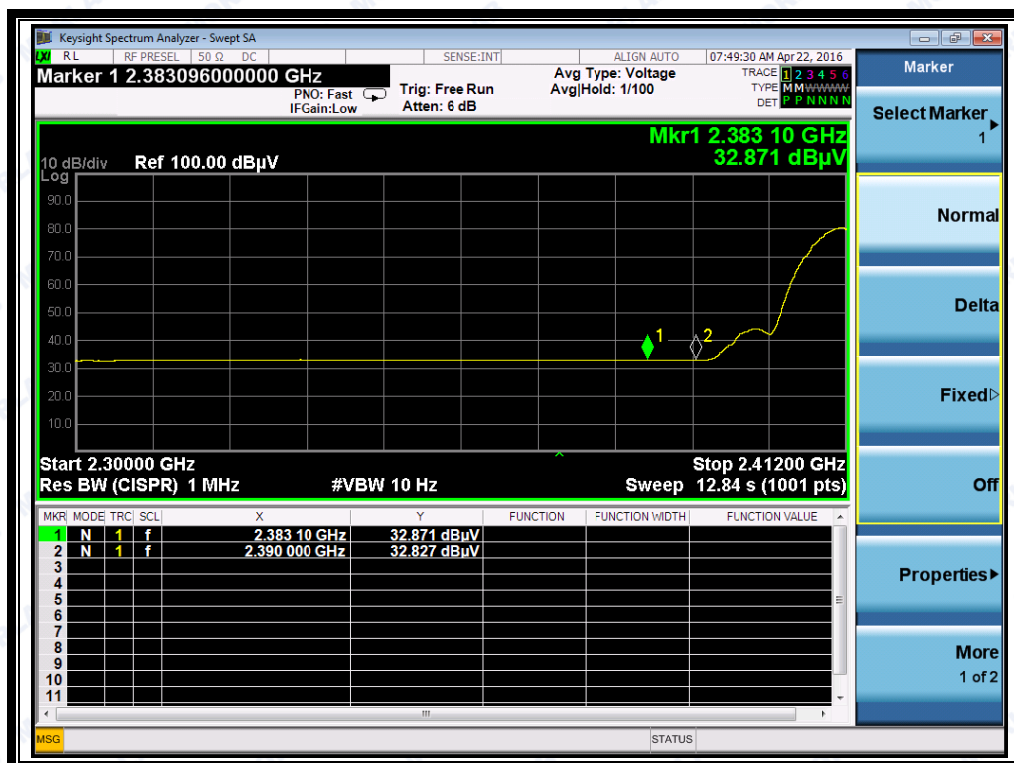


(Plot A2: Channel = 1 AVG @ 802.11b)



REPORT No.: SZ16020003W03



(Plot B1: Channel = 11 PEAK @ 802.11b)

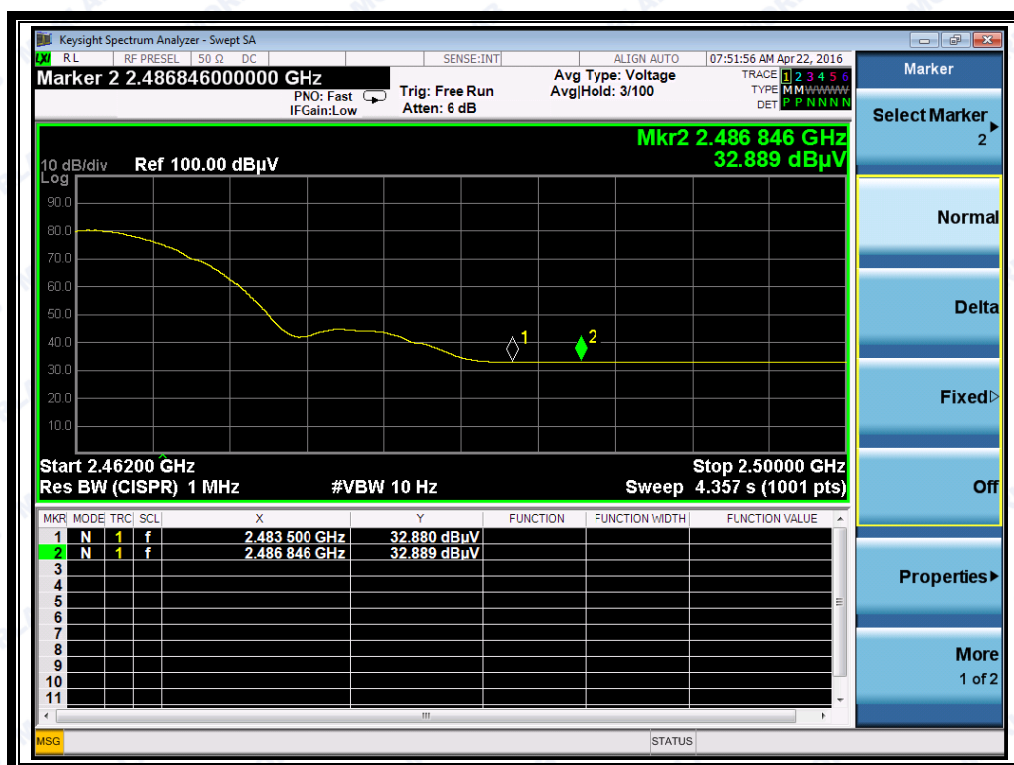

(Plot B2: Channel = 11 AVG @ 802.11b)




2.6.3.2 802.11g Test mode

The lowest and highest channels are tested to verify the band edge emissions.

A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
1	2386.51	PK	48.07	-33.63	32.56	47.00	74	Pass
1	2384.72	AV	33.75	-33.63	32.56	32.68	54	Pass
11	2487.26	PK	53.04	-33.18	32.5	52.36	74	Pass
11	2486.09	AV	36.79	-33.18	32.5	36.11	54	Pass


B. Test Plots:

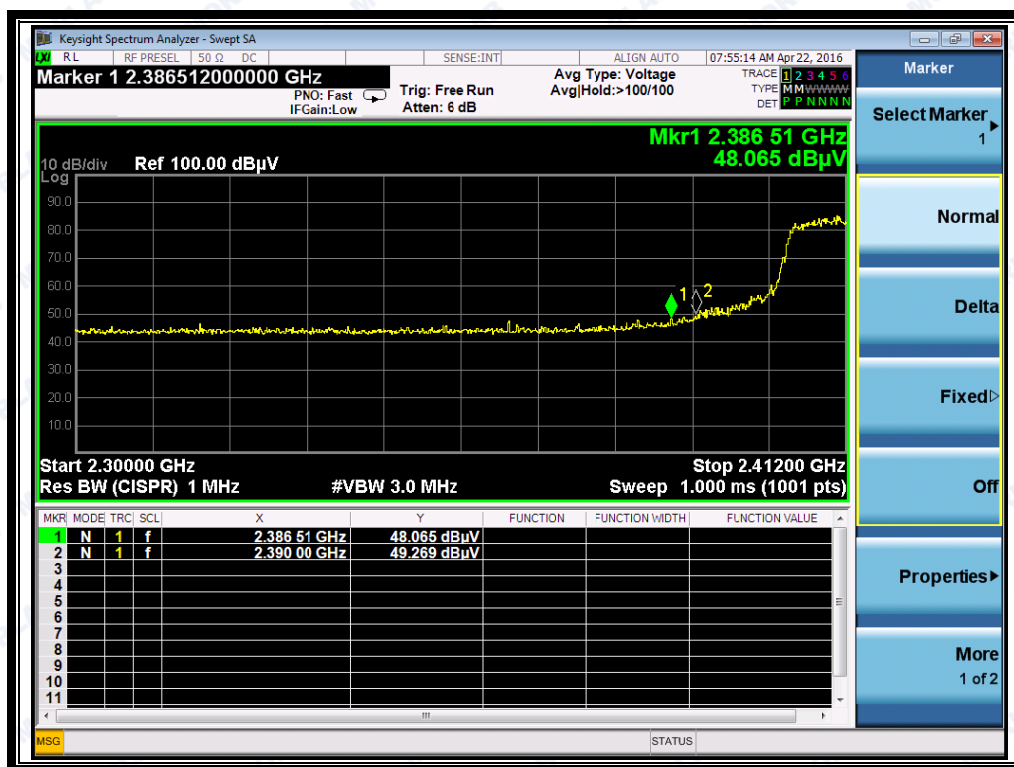

(Plot C1: Channel = 1 PEAK @ 802.11g)




REPORT No.: SZ16020003W03

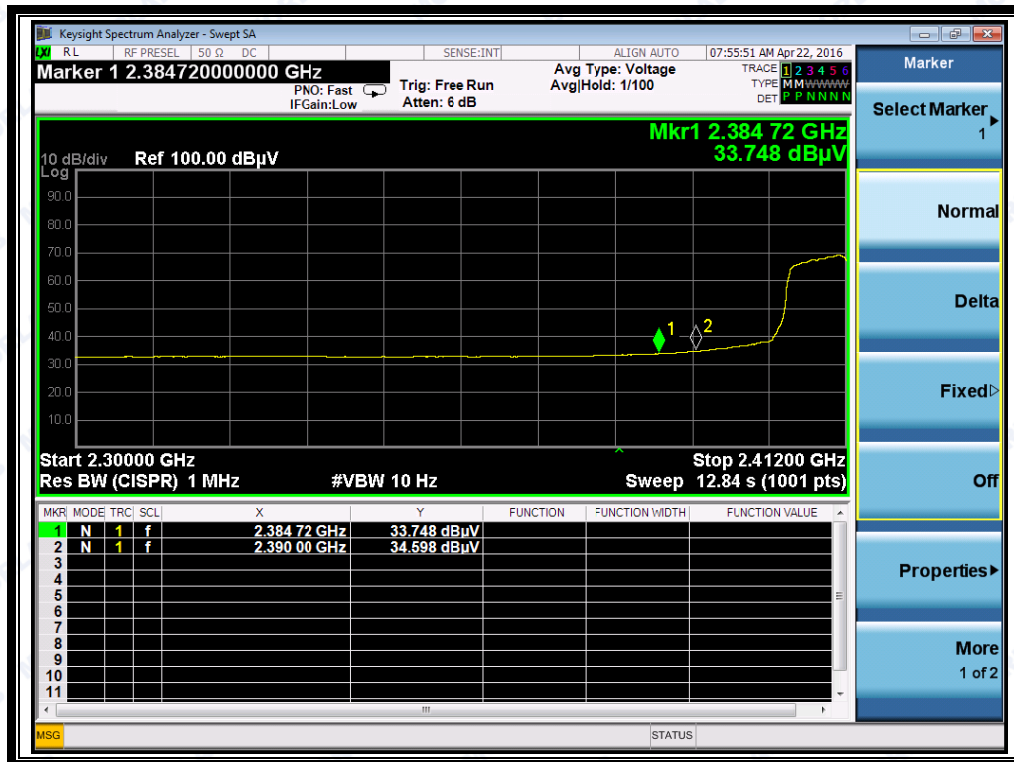

(Plot C2: Channel = 1 AVG @ 802.11g)



(Plot D1: Channel = 11 PEAK @ 802.11g)

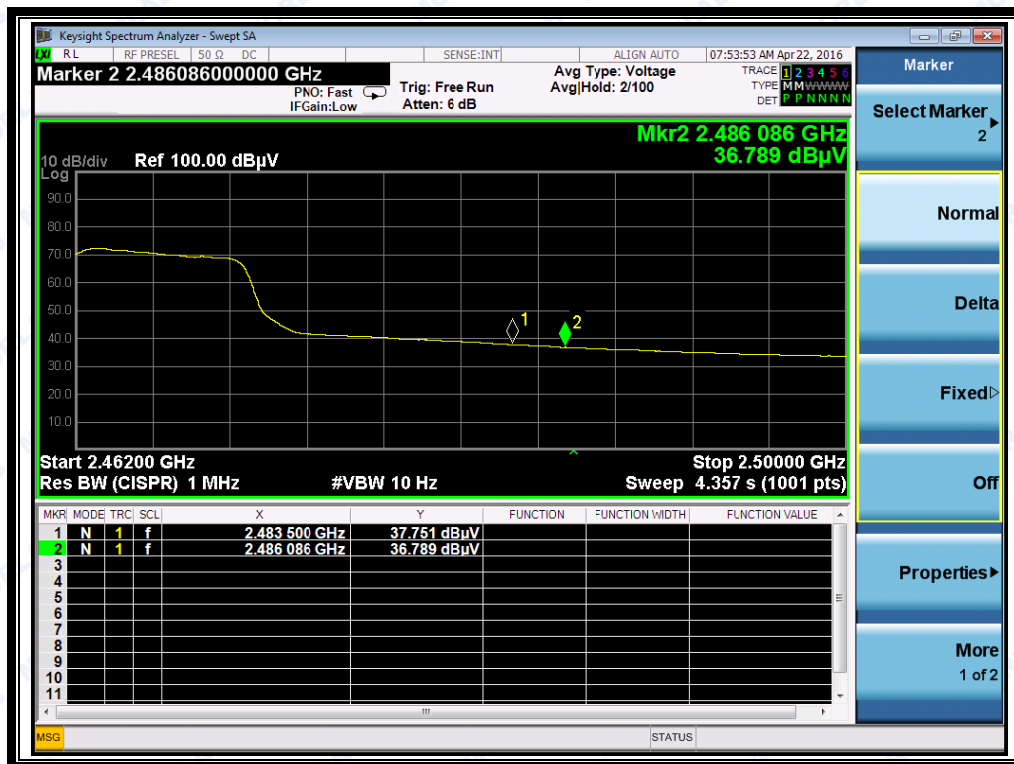

(Plot D2: Channel = 11 AVG @ 802.11g)

2.6.3.3 802.11n-20MHz Test mode

The lowest and highest channels are tested to verify the band edge emissions.


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBμV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
1	2387.86	PK	47.73	-33.63	32.56	46.66	74	Pass
1	2386.06	AV	33.00	-33.63	32.56	31.93	54	Pass
11	2484.61	PK	53.82	-33.18	32.5	53.14	74	Pass
11	2484.27	AV	36.78	-33.18	32.5	36.10	54	Pass


B. Test Plots:



REPORT No.: SZ16020003W03

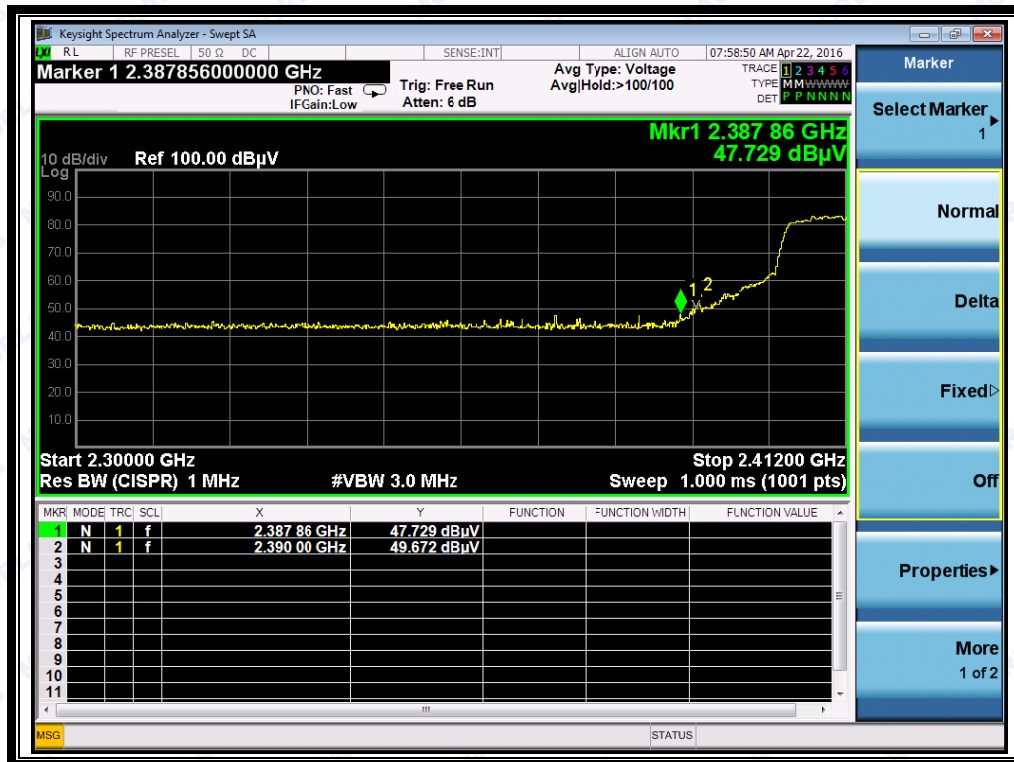

(Plot E1: Channel = 1 PEAK @ 802.11n-20)

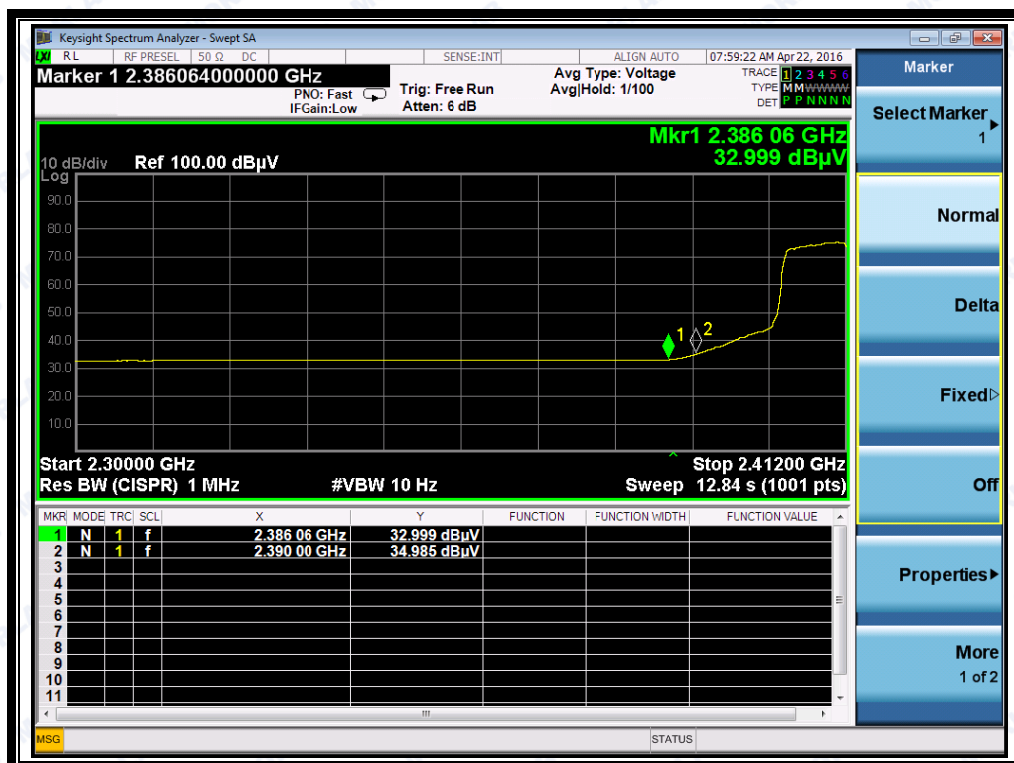


(Plot E2: Channel = 1 AVG @ 802.11n-20)



REPORT No.: SZ16020003W03



(Plot F1: Channel = 11 PEAK @ 802.11n-20)

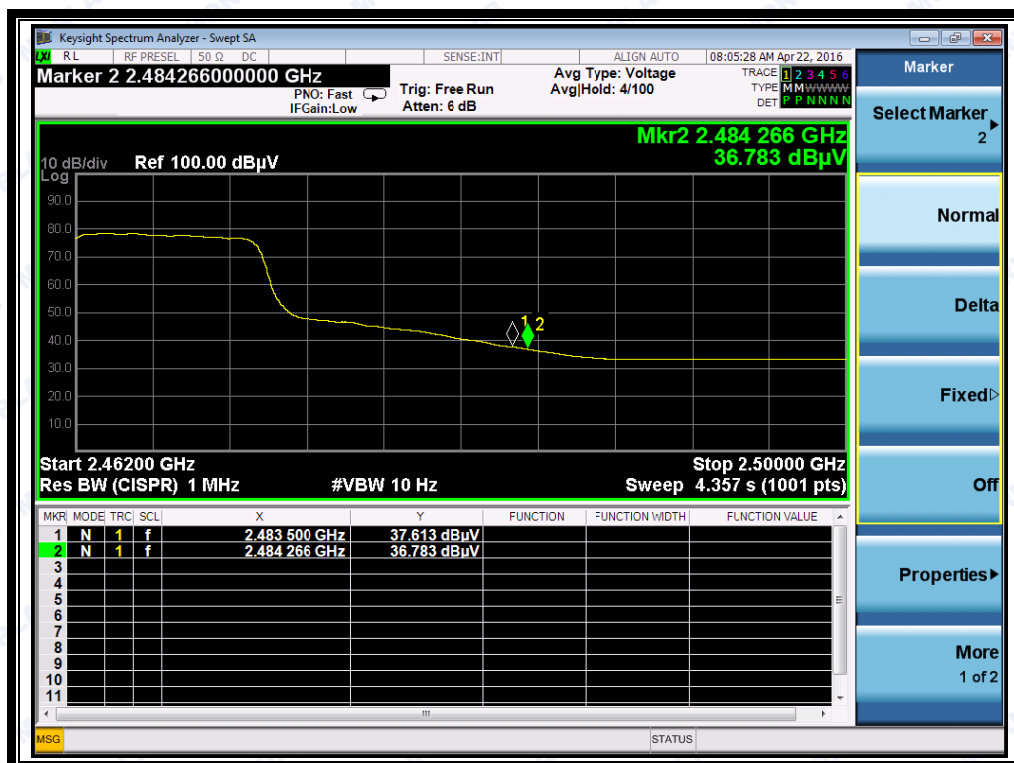

(Plot F2: Channel = 11 AVG @ 802.11n-20)




2.6.3.4 802.11n-40MHz Test mode

The lowest and highest channels are tested to verify the band edge emissions.

A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
3	2386.58	PK	52.84	-33.63	32.56	51.77	74	Pass
3	2385.68	AV	36.05	-33.63	32.56	34.98	54	Pass
9	2484.66	PK	57.30	-33.18	32.5	56.62	74	Pass
9	2485.00	AV	39.88	-33.18	32.5	39.20	54	Pass


B. Test Plots:

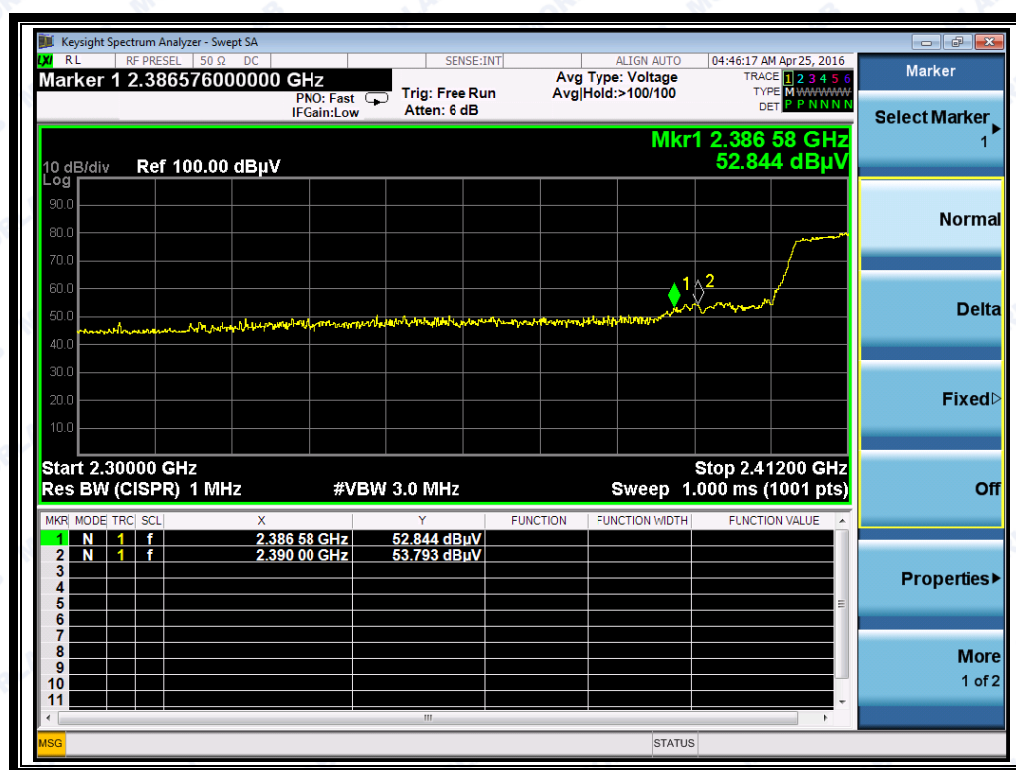


(Plot G1: Channel = 3 PEAK @ 802.11n-40)




REPORT No.: SZ16020003W03

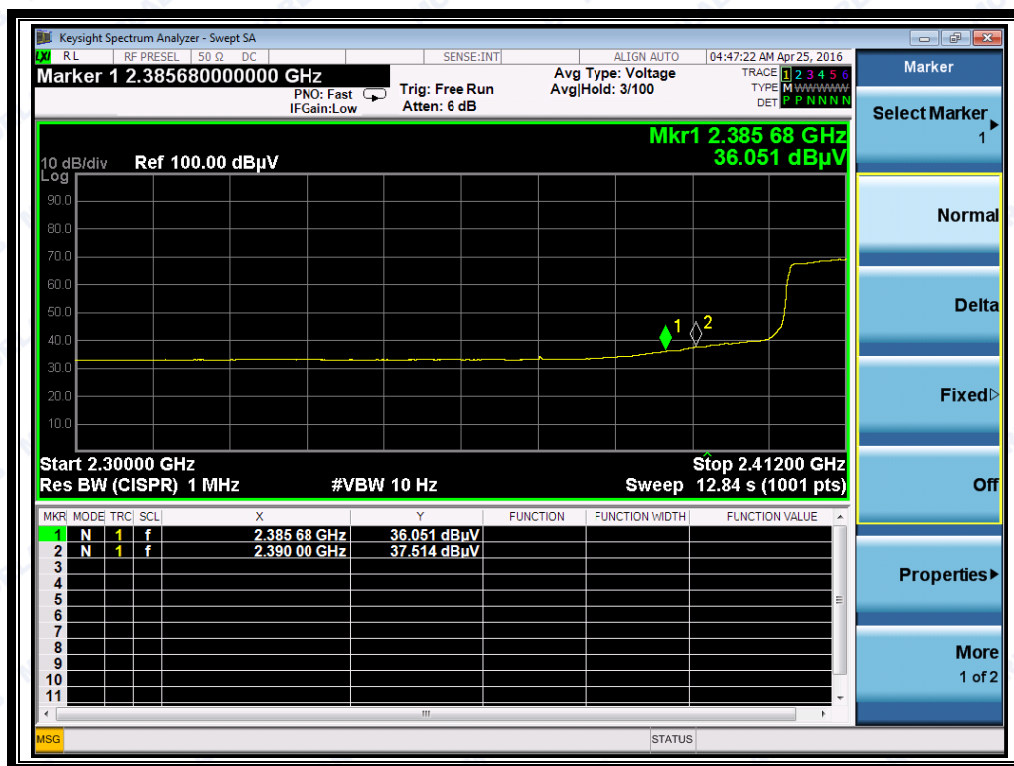

(Plot G2: Channel = 3 AVG @ 802.11n-40)

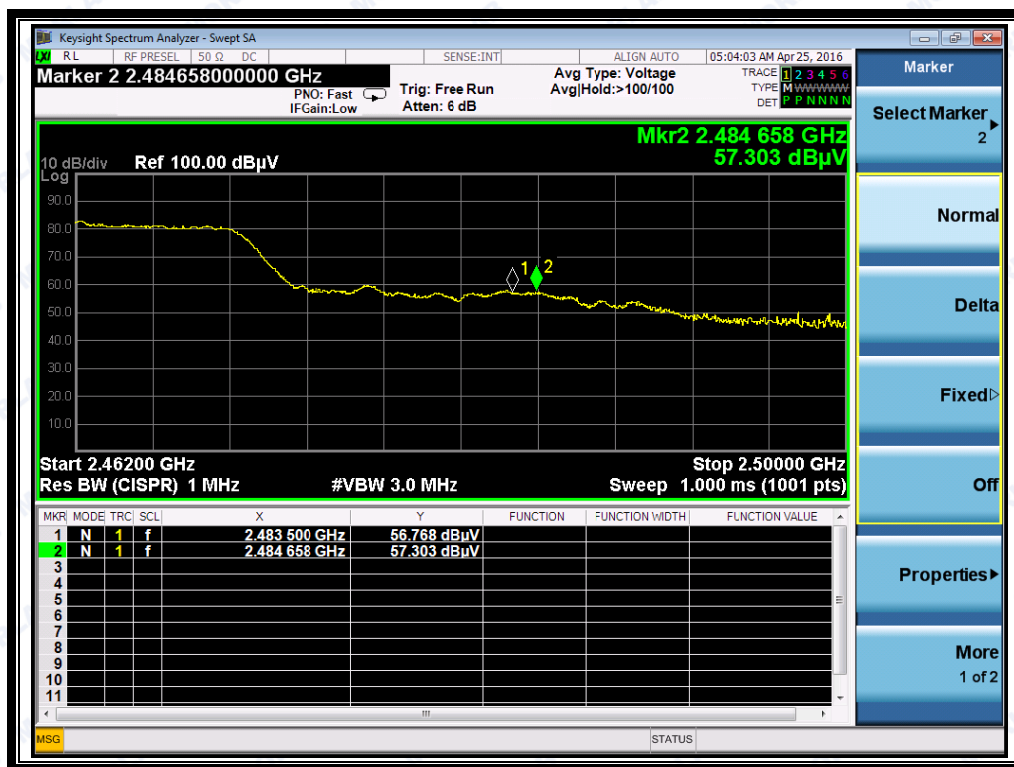

(Plot H1: Channel = 9 PEAK @ 802.11n-40)

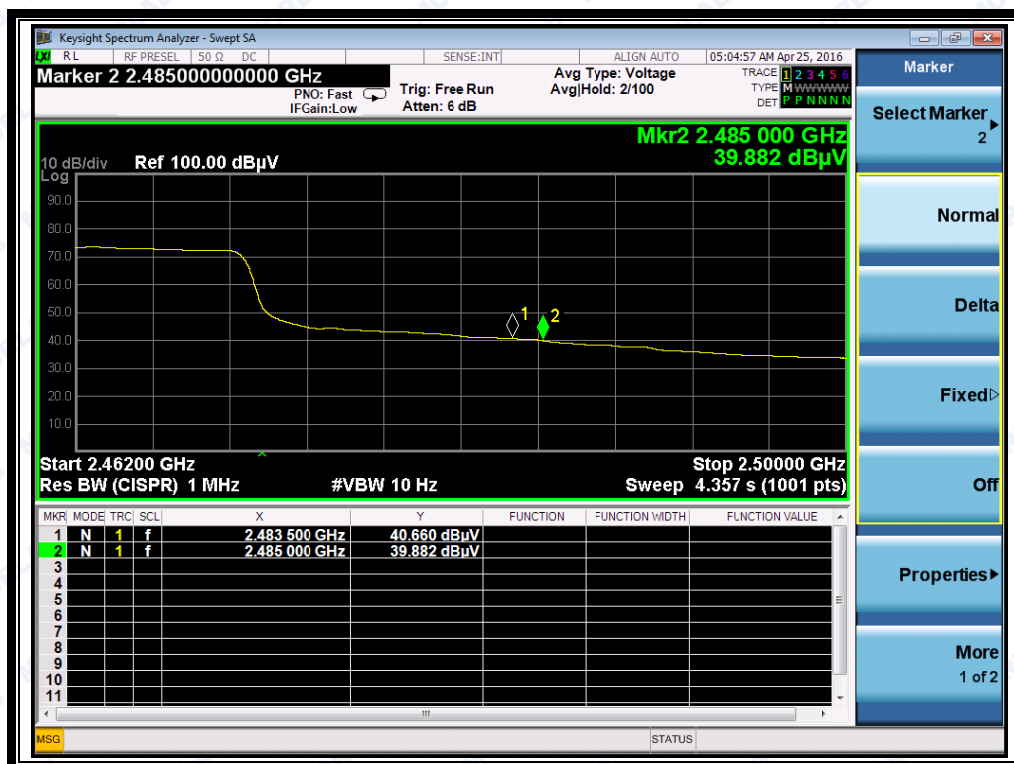

(Plot H2: Channel = 9 AVG @ 802.11n-40)

2.7 Conducted Emission

2.7.1 Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.7.2 Test Description

A. Test Setup:

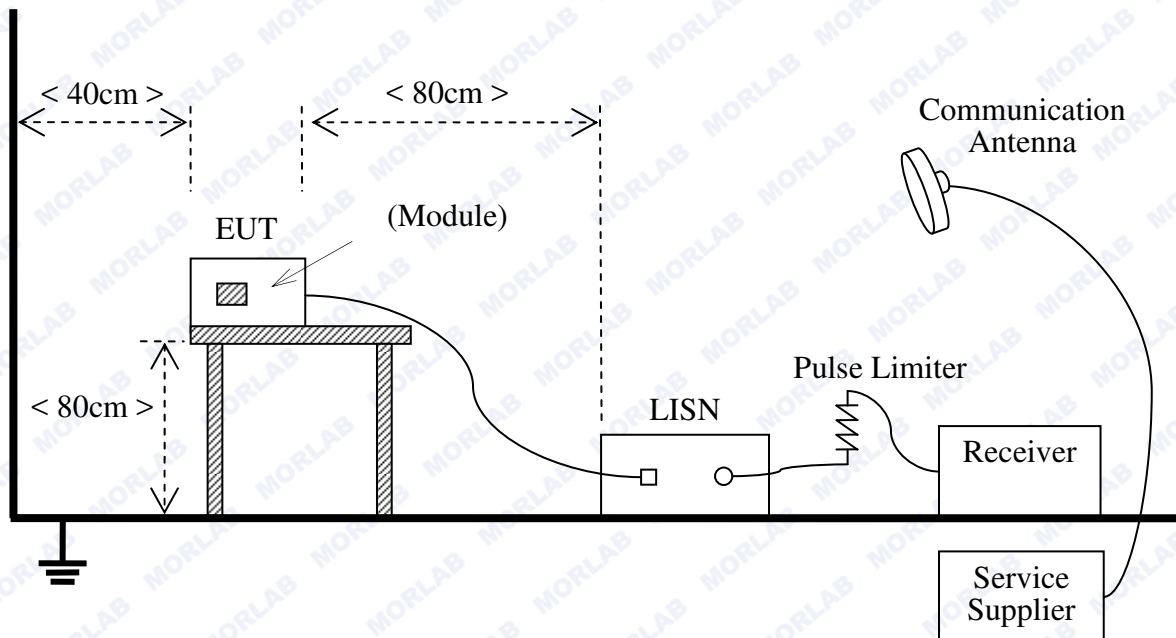

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2009



B. Equipments List:

Please reference ANNEX A(1.5).

2.7.3 Test Result


The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Note: All test modes are performed, only the worst case is recorded in this report.


A. Test setup:

The EUT configuration of the emission tests is EUT + Link.

B. Test Plots:

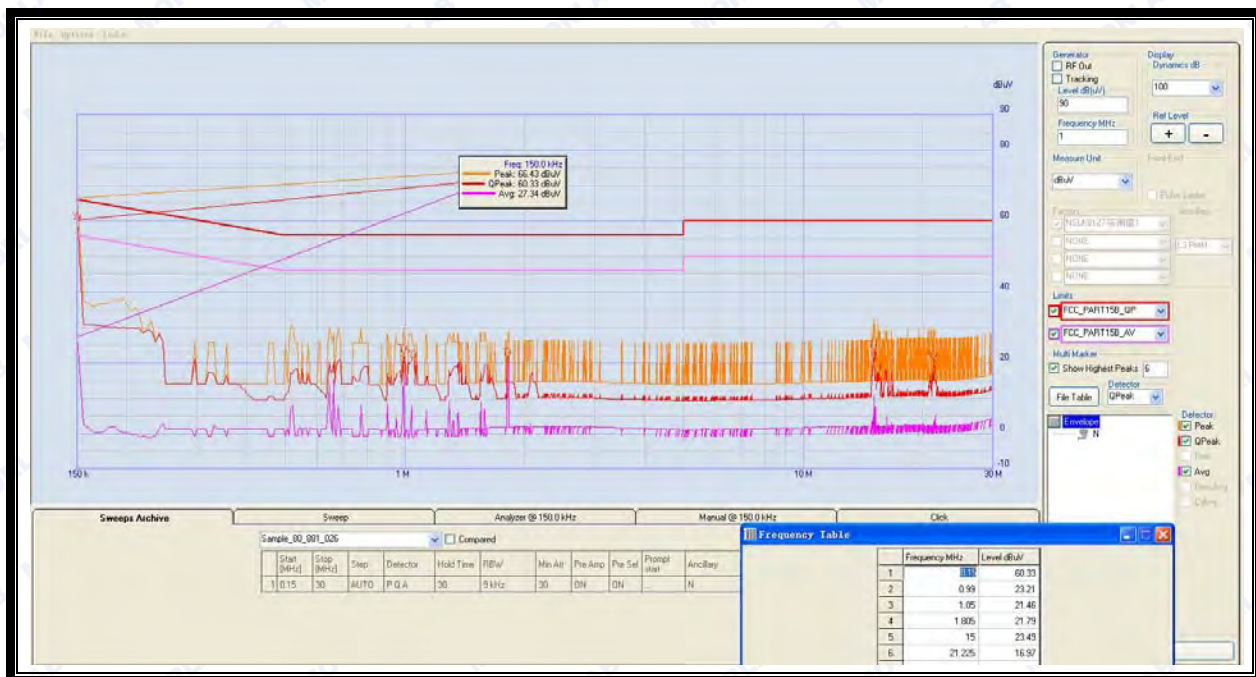

(Plot A: L Phase)

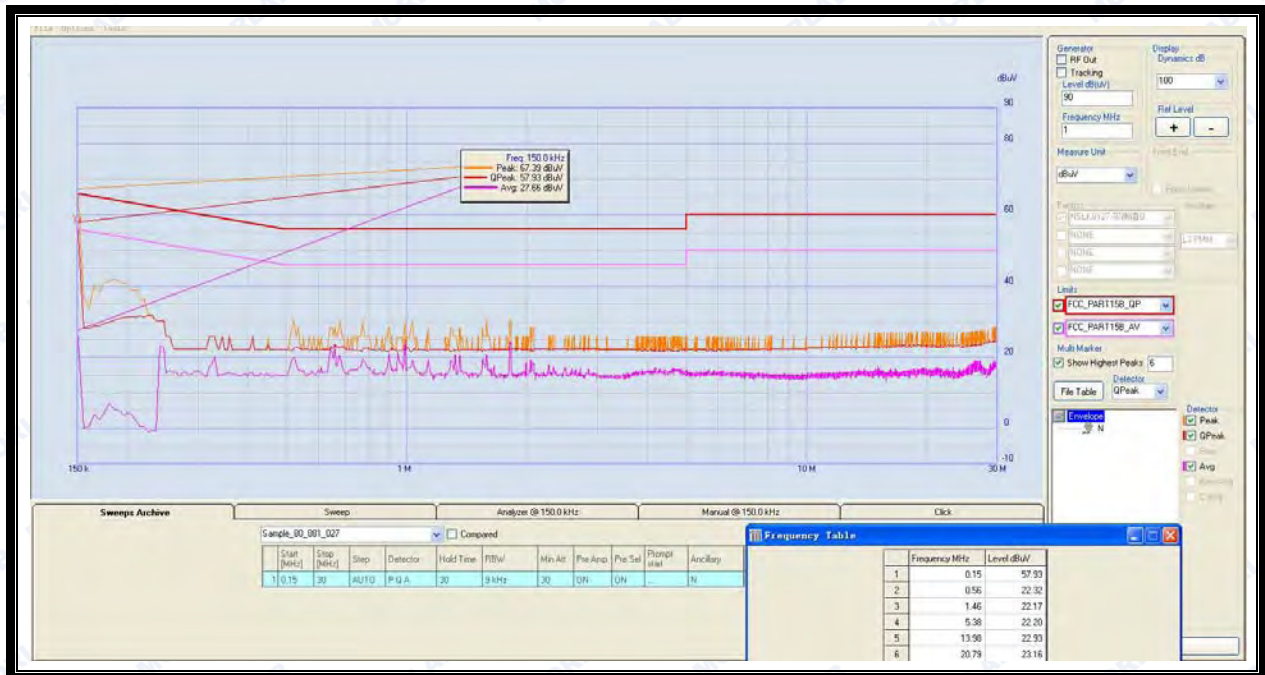

(Plot B: N Phase)



2.8 Radiated Emission

2.8.1 Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.


For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.8.2 Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

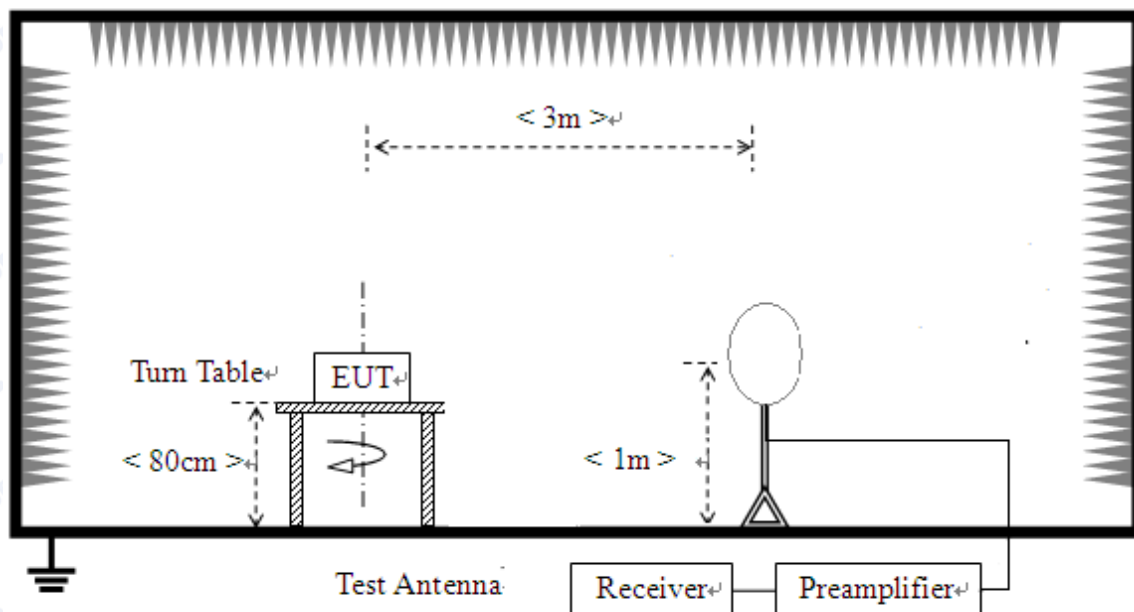

- 2) For radiated emissions from 30MHz to 1GHz

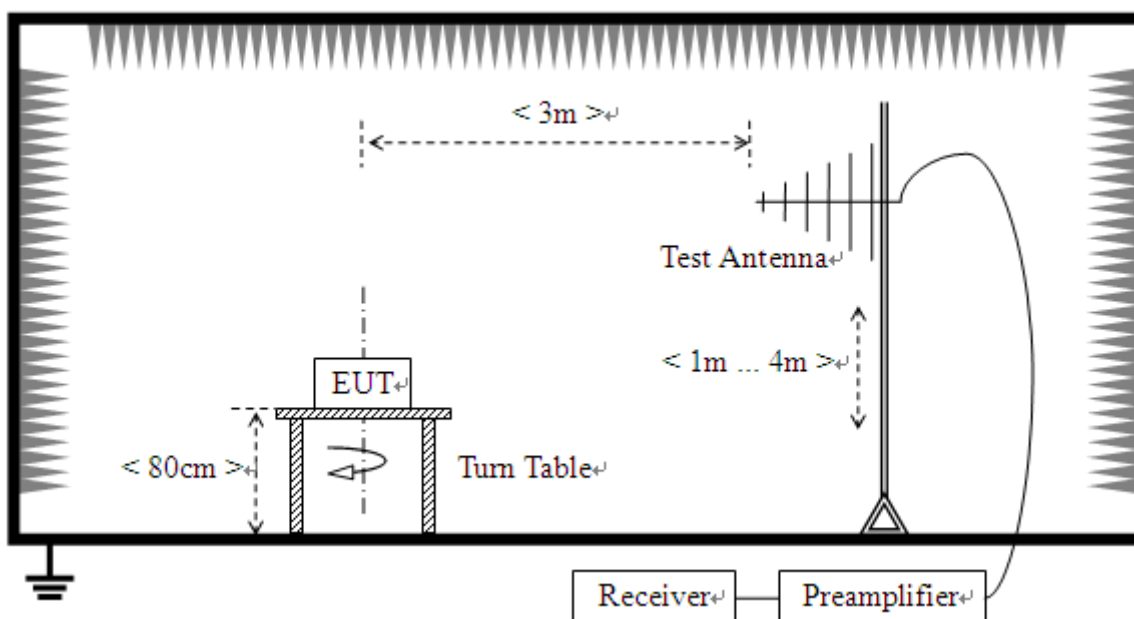

3) For radiated emissions above 1GHz

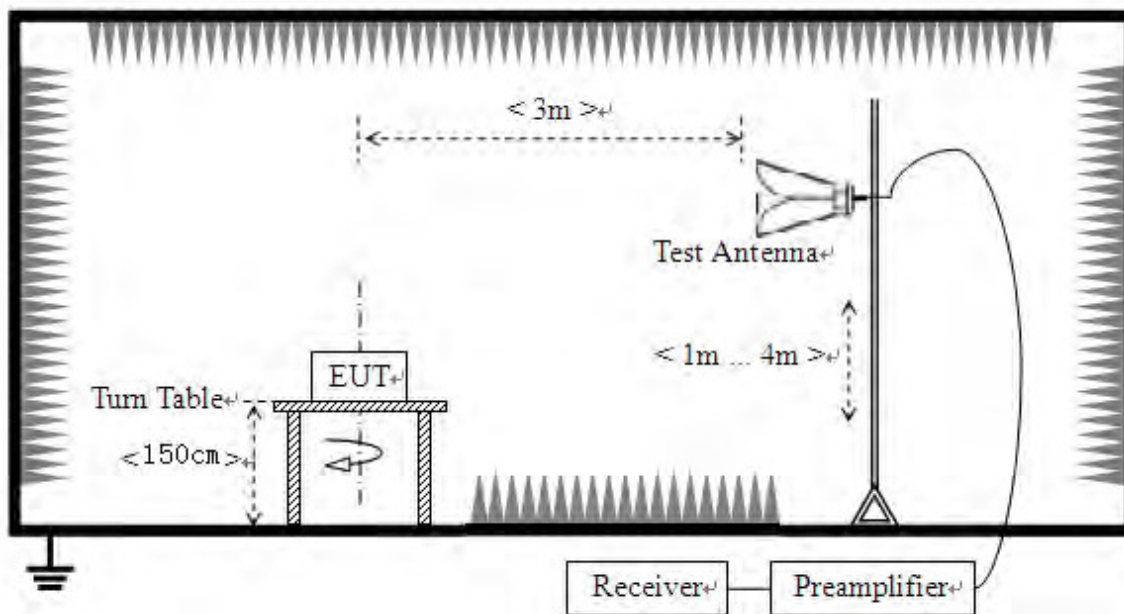

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading

For the Test Antenna:

- (a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna.



The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please reference ANNEX A(1.4).

2.8.3 Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

**2.8.3.1 802.11b Test mode****A. Test Plots for the Whole Measurement Frequency Range:**

Plots for Channel = 1



Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	23.14	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
65.207	17.83	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
272.804	25.90	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2340.056	46.44	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
5671.395	47.10	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
16083.179	49.58	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	28.32	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
65.207	24.28	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
127.121	24.88	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
2545.578	49.33	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
4441.207	45.65	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
10347.736	47.88	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




Plot for Channel = 6



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	19.06	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
65.207	18.00	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
203.605	24.18	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
2076.271	42.96	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
5769.158	45.77	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
16172.795	49.84	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

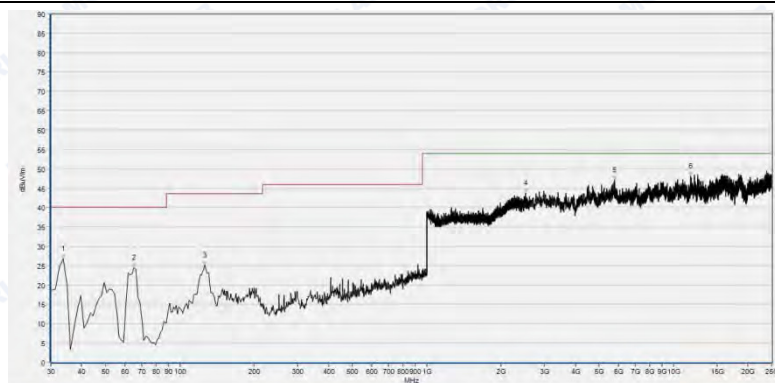


Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	26.74	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
65.207	24.42	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
125.907	25.17	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
2516.767	43.78	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5785.452	47.02	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
11728.642	48.05	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



Plot for Channel = 11

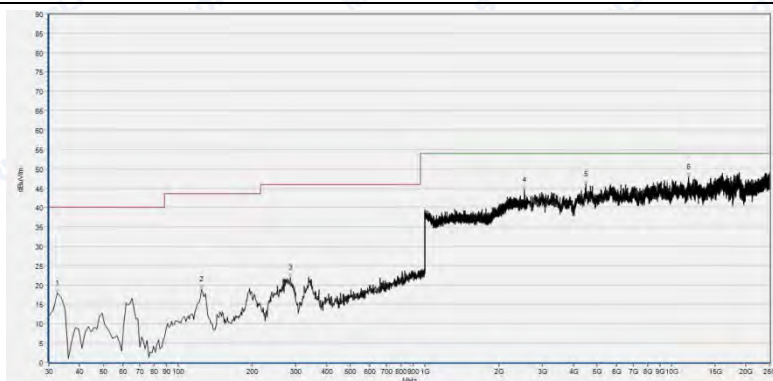


Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
32.428	17.89	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
124.693	18.98	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
284.944	21.98	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2537.895	44.53	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
4494.163	46.15	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
11740.862	47.88	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	26.55	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
65.207	24.13	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
125.907	25.25	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
2465.546	48.42	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
4477.869	45.39	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
9040.153	47.49	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)

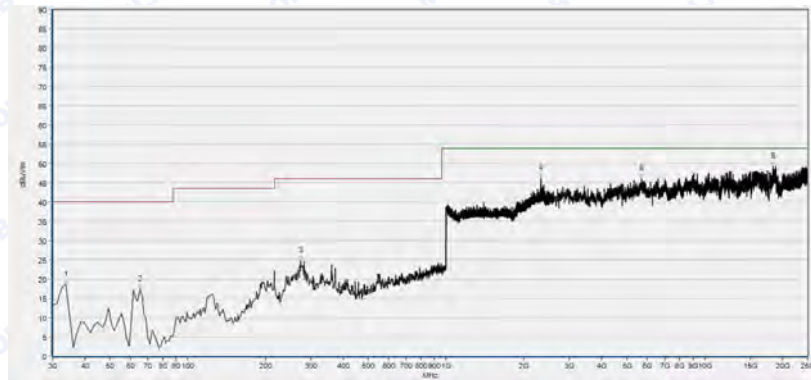**2.8.3.2 802.11g Test mode****A. Test Plots for the Whole Measurement Frequency Range:**Plots for Channel = 1

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	18.62	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
65.207	17.40	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
274.018	24.79	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2332.373	46.32	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
5703.983	46.05	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
18396.909	49.29	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
32.428	25.09	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
65.207	28.38	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
125.907	25.53	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
2373.349	49.11	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5748.791	46.31	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
14323.441	48.76	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



Plot for Channel = 6



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	20.67	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
65.207	17.00	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
277.660	23.44	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2339.416	44.07	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
5671.395	46.63	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
15981.342	48.76	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)




Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	28.38	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
61.564	25.79	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
124.693	25.02	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
2370.788	45.80	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
6555.337	47.29	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




Plot for Channel = 11

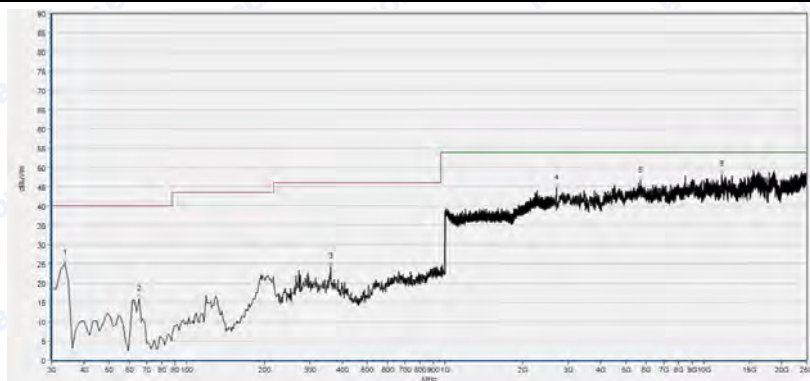


Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	25.20	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
65.207	15.91	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
360.213	24.35	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2697.763	44.60	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
5703.983	46.55	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
11744.935	48.14	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

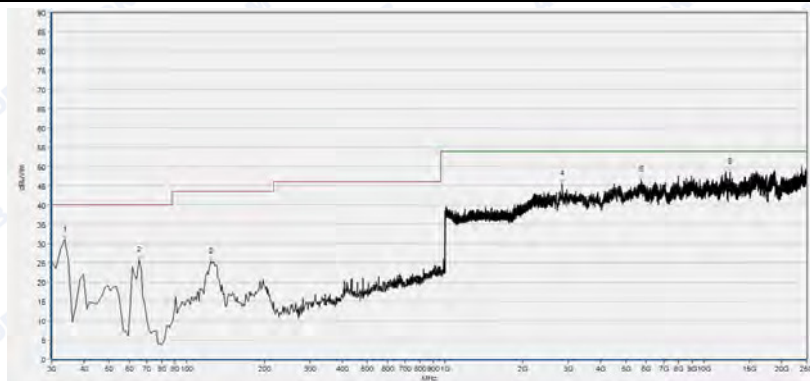

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	31.16	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
65.207	25.79	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
123.479	25.37	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
2836.261	45.49	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5736.570	46.61	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
12620.731	48.60	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)

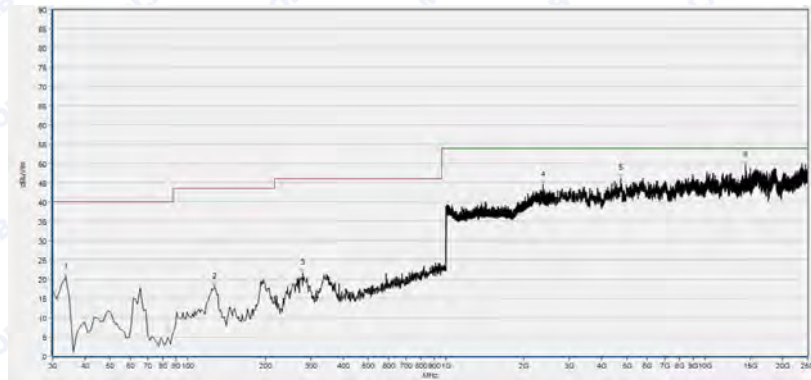**2.8.3.3 802.11n-20MHz Test mode****A. Test Plots for the Whole Measurement Frequency Range:**Plots for Channel = 1

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	20.53	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
127.121	18.09	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
278.874	21.60	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2373.990	44.41	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
4734.497	46.27	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
14417.130	49.64	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)




Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	27.65	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
65.207	24.66	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
123.479	25.15	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
2336.855	45.13	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5765.085	46.82	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
16099.473	48.75	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



REPORT No.: SZ16020003W03

Plot for Channel = 6

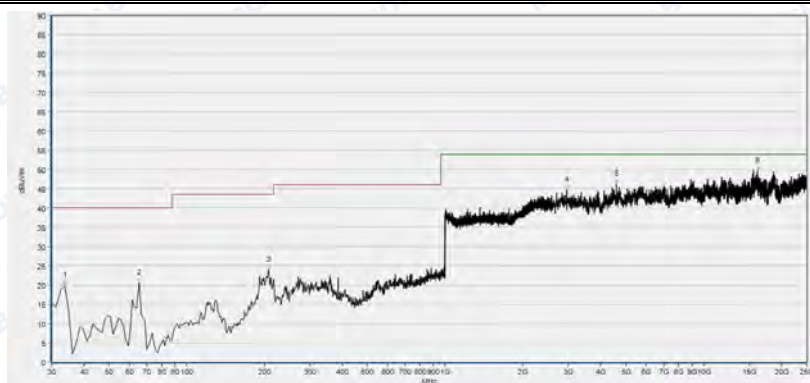

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	19.84	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
65.207	20.52	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
207.247	23.94	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
2958.465	44.71	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
4595.999	46.26	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
16172.795	49.73	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
32.428	26.32	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
65.207	24.39	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
125.907	24.64	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
2767.012	43.96	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5866.921	46.70	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
15863.211	48.85	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



Plot for Channel = 11




Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	25.20	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
65.207	20.41	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
283.730	21.78	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2244.658	43.88	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
5793.599	46.51	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
15757.301	48.66	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	30.77	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
61.564	24.61	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
127.121	25.16	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
2379.752	44.67	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5659.174	47.07	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
14408.983	49.72	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)

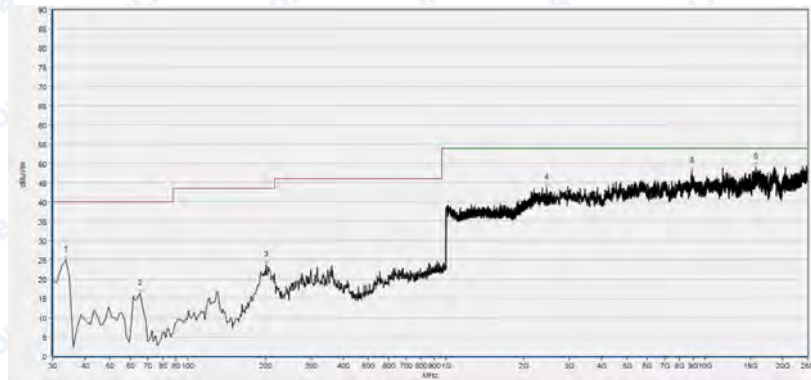**2.8.3.4 802.11n-40MHz Test mode****A. Test Plots for the Whole Measurement Frequency Range:**Plots for Channel = 3

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	24.93	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
65.207	16.33	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
201.176	23.76	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
2450.180	43.67	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
8930.169	48.12	59.61	N.A	74.0	N.A	54.0	Horizontal	PASS
15757.301	49.03	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot A.2: Antenna Horizontal, 30MHz to 25GHz)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	30.83	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
61.564	25.00	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
125.907	24.58	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
3153.992	45.23	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
6958.611	46.89	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
15761.375	49.24	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot A.3: Antenna Vertical, 30MHz to 25GHz)



REPORT No.: SZ16020003W03

Plots for Channel = 6



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	25.01	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
125.907	19.12	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
346.859	22.28	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2306.122	45.46	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
5439.207	46.92	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
16205.383	49.53	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot B.2: Antenna Horizontal, 30MHz to 25GHz)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	31.05	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
65.207	24.87	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
124.693	25.03	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
2512.285	43.90	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
7989.198	47.35	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
17973.268	48.73	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot B.3: Antenna Vertical, 30MHz to 25GHz)




REPORT No.: SZ16020003W03

Plots for Channel = 9



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	19.87	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
65.207	18.27	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
206.033	23.04	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
2152.461	43.30	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
6510.529	46.67	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
15578.069	49.18	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot C.2: Antenna Horizontal, 30MHz to 25GHz)

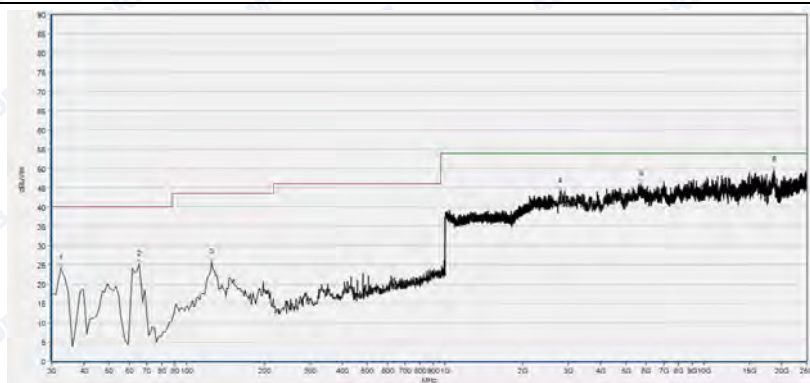

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
32.428	24.05	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
65.207	25.10	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
124.693	25.79	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
2771.086	44.10	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5732.497	46.03	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
18763.521	49.73	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot C.3: Antenna Vertical, 30MHz to 25GHz)



ANNEX A GENERAL INFORMATION

1.1 Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

1.2 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

1.3 Facilities and Accreditations

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10 2009, ANSI C63.4 2009 and CISPR Publication 22; the FCC registration number is 695796.

1.4 Maximum measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Measurements	Frequency	Uncertainty
Conducted emissions	9KHz~30MHz	2.44dB
Radiated emissions	30MHz~200MHz	2.93
	200MHz~1000MHz	2.95
	1GHz~18GHz	2.26
	18GHz~40GHz	1.94



REPORT No.: SZ16020003W03

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$

1.5 Test Equipments Utilized

1.5.1 Conducted Test Equipments

Conducted Test Equipment						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Spectrum Analyzer	MY45101810	E4407B	Agilent	2016.03.02	2017.03.01
2	USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2016.03.02	2017.03.01
3	EXA Signal Analyzer	MY53470838	N9010A	Agilent	2015.08.26	2016.08.25
4	RF cable	CB01	RF01	Morlab	N/A	N/A
5	Attenuator	(n.a.)	10dB	Resnet	N/A	N/A
6	SMA connector Note	CN01	RF03	HUBER-SUHNER	N/A	N/A
Note: The SMA antenna connector is soldered on the PCB board in order to perform conducted tests and this SMA antenna connector is listed in the equipment list.						

1.5.2 Radiated Test Equipments

Radiated Test Equipments						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal.Due Date
1	System Simulator	GB45360846	8960-E5515C	Agilent	2015.05.07	2016.05.06
2	Receiver	MY54130016	N9038A	Agilent	2015.05.07	2016.05.06
3	Test Antenna - Bi-Log	N/A	VULB9163	Schwarzbeck	2015.05.14	2016.05.13
4	Test Antenna - Horn	9170C-531	BBHA9170	Schwarzbeck	2016.03.02	2017.03.01
5	Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2016.03.02	2017.03.01
6	Test Antenna - Horn	71688	BBHA 9120D	Schwarzbeck	2016.03.02	2017.03.01
7	Coaxial cable(N male)	CB02	EMC02	Morlab	N/A	N/A
8	Coaxial cable(N male)	CB03	EMC03	Morlab	N/A	N/A
9	1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde&Schwarz	2016.03.02	2017.03.01
10	18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde&Schwarz	2016.03.02	2017.03.01



REPORT No.: SZ16020003W03

1.5.3 Climate Chamber

Climate Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Climate Chamber	2004012	HL4003T	Yinhe	2016.03.02	2017.03.01

1.5.4 Vibration Table

Vibration Table						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Vibration Table	N/A	ACT2000-S015L	CMI-COM	2016.03.02	2017.03.01

1.5.5 Anechoic Chamber

Anechoic Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Anechoic Chamber	N/A	9m*6m*6m	Changning	2015.05.14	2016.05.13

1.5.6 Auxiliary Test Equipment

Auxiliary Test Equipment						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Computer	N.A	PU500C	Asus	N.A	N.A

***** END OF REPORT *****