



RF - TEST REPORT

- FCC Part 15.247, RSS-247 -

Type / Model Name : SME

Product Description : Radio Module 802.11a/b/n/ac & BLE

Applicant : BSH Hausgeräte GmbH

Address : Carl-Wery-Straße 34

81739 München

Manufacturer : BSH Hausgeräte GmbH

Address : Carl-Wery-Straße 34

81739 München

Test Result according to the standards
listed in clause 1 test standards:

POSITIVE

Test Report No. : **80136616-02 Rev_0**

25. January 2023

Date of issue



Deutsche
Akkreditierungsstelle
D-PL-12030-01-03
D-PL-12030-01-04

Contents

1	<u>TEST STANDARDS</u>	3
2	<u>EQUIPMENT UNDER TEST</u>	4
2.1	Information provided by the Client	4
2.2	Sampling	4
2.3	General remarks	4
2.4	Photo documentation of the EUT – Detailed photos see ATTACHMENT A	4
2.5	Equipment type	4
2.6	Short description of the equipment under test (EUT)	4
2.7	Variants of the EUT	4
2.8	Operation frequency and channel plan	5
2.9	Transmit operating modes	5
2.10	Antenna	5
2.11	Power supply system utilised	6
2.12	Peripheral devices and interface cables	6
2.13	Determination of worst case conditions for final measurement	6
3	<u>TEST RESULT SUMMARY</u>	7
3.1	Final assessment	7
4	<u>TEST ENVIRONMENT</u>	8
4.1	Address of the test laboratory	8
4.2	Environmental conditions	8
4.3	Statement of the measurement uncertainty	8
4.4	Conformity Decision Rule	9
4.5	Measurement protocol for FCC and ISED	9
5	<u>TEST CONDITIONS AND RESULTS</u>	12
5.1	AC power line conducted emissions	12
5.2	Maximum peak conducted output power	17
5.3	Radiated emissions in restricted bands	19
5.4	Antenna application	29
6	<u>USED TEST EQUIPMENT AND ACCESSORIES</u>	30

ATTACHMENT A as separate supplement

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

Rev. No. 6.4 2021-04-29

2 EQUIPMENT UNDER TEST

2.1 Information provided by the Client

Please note, we do not take any responsibility for information provided by the client or his representative which may have an influence on the validity of the test results.

2.2 Sampling

The customer is responsible for the choice of sample. Sample configuration, start-up and operation is carried out by the customer or according to his/her instructions.

2.3 General remarks

This report covers the emissions of the Module "SMB" (FCC ID: 2AHES-SMB / IC: 21152-SMB) in combination with the host device SME.

Performed tests:

- AC powerline conducted emissions
- RF output power
- Transmitter unwanted emissions, radiated

2.4 Photo documentation of the EUT – Detailed photos see ATTACHMENT A

2.5 Equipment type

WLAN - Client

2.6 Short description of the equipment under test (EUT)

The EUT is a communication module for assembling into household devices. The firmware does not support ad-hoc modes and gives the user no possibility to choose the channel for data transmission or power setting. The EUT is compatible with IEEE 802.11b, g, n Standard and 802.15. It supports the 2.4 GHz frequency band and supports no beam forming.

Tested sample:	: 1 radiated sample
Serial number	: 80012177950000440335000000148
SW	: BSH Embedded Linux Platform (SME default) - debug [HWTEST] 53.0.2-4-gdf59b1d
WLAN Firmware version	: 1.28 RC0.0 wl0: Apr 15 2021 03:04:08 version 7.45.234 (4ca95bb CY WLTEST) FWID 01-67595eaa

Tested sample:	: 1 conducted sample
Serial number	: 800121779500004403350000000071
SW	: BSH Embedded Linux Platform (SME default) - debug [HWTEST] 53.0.2-4-gdf59b1d
WLAN Firmware version	: 1.28 RC0.0 wl0: Apr 15 2021 03:04:08 version 7.45.234 (4ca95bb CY WLTEST) FWID 01-67595eaa

2.7 Variants of the EUT

There are no variants.

2.8 Operation frequency and channel plan

The operating frequency is 2400 MHz to 2483.5 MHz.

Channel Plan:

802.11b, g, n HT20:

Channel	Frequency (MHz)
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462

2.9 Transmit operating modes

The EUT use DSSS or OFDM modulation and provide following data rates with auto-fall-back:

- 802.11b 11, 5.5, 2, 1 Mbps (Mbps = *megabits per second*)
- 802.11g 54, 48, 36, 24, 18, 12, 9, 6 Mbps
- 802.11n HT20, MCS 0 – 7

2.10 Antenna

The following antennas shall be used with the EUT:

The EUT has only an integrated PCB antenna, no temporary connector and no external antenna to be connected.

Number	Characteristic	Model number	Plug	Frequency range (GHz)	Gain (dBi)
1	Omni	PCB antenna (Ant0)	-	2.4	3.45
2	Omni	PCB antenna (Ant1)	-	2.4	3.30

The EUT is equipped with two internal antennas with diversity mode.

Only one antenna (Ant0) was active for testing.

For conducted tests a special prepared sample with an U.FL Port instead of Ant0 was used.

2.11 Power supply system utilised

Power supply voltage, V_{nom} : 5 V_{DC}

2.12 Peripheral devices and interface cables

The following peripheral devices and interface cables are connected during the measurements:

- USB to serial converter cable Model : -
- Laptop Model : Fujitsu (02-01/01-11-006)

2.13 Determination of worst case conditions for final measurement

Measurements are made in all three orthogonal axes and the settings of the EUT are changed to locate at which position and at what setting of the EUT produce the maximum of the emissions.

WLAN	Available channel	Tested channels	Power setting	Modulation	Modulation type	Data rate
802.11b	1 to 11	1, 11	Pmax	DSSS	DBPSK	1 Mbps
802.11n HT20	1 to 11	1, 11	Pmax	OFDM	BPSK	MCS7

2.13.1 Test jig

No test jig is used.

2.13.2 Test software

The test software is controlled by a terminal program (PuTTY) and a set of commands. The test software allows to set the EUT into RX and TX continuous modulated mode, set different channel and allows free power setting.

3 TEST RESULT SUMMARY

FCC Rule Part	RSS Rule Part	Description	Result
15.207(a)	RSS-Gen, 8.8	AC power line conducted emissions	passed
15.247(a)(2)	RSS-247, 5.2(a)	-6 dB EBW	Not tested ¹
15.247(b)(3)	RSS-247, 5.4(d)	Maximum peak conducted output power	Passed
15.247(b)(4)	RSS-247, 5.4(d)	Defacto limit	Not tested ¹
15.247(d)	RSS-247, 5.5	Unwanted emission, radiated	Passed
15.247(d)	RSS-Gen, 8.10	Emissions in restricted bands	Passed
15.247(e)	RSS-247, 5.2(b)	PSD	Passed
15.35(c)	RSS-Gen, 6.10	Pulsed operation	Not tested ¹
15.203	-	Antenna requirement	Passed
	RSS-Gen, 6.11	Transmitter frequency stability	Not tested ¹
	RSS-Gen, 6.6	99 % Bandwidth	Not tested ¹

¹ Not tested because of module integration requirements.

The mentioned RSS Rule Parts in the above table are related to:
 RSS-Gen, Issue 5 + Amendment 1, March 2019
 RSS-247, Issue 2, February 2017

3.1 Final assessment

The equipment under test fulfills the requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 09 September 2022

Testing concluded on : 13 October 2022

Checked by:

Tested by:

 Klaus Gegenfurtner
 Teamleader Radio

 Lukas Scheuermann
 Radio Team

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

**CSA Group Bayern GmbH
Ohmstrasse 1-4
94342 STRASSKIRCHEN
GERMANY**

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15 - 35 °C

Humidity: 30 - 60 %

Atmospheric pressure: 86 - 106 kPa

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. It is noted that the expanded measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k = 2$. The true value is located in the corresponding interval with a probability of 95 %. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4-2 / 2011 + A1 / 2014 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurements“ and is documented in the quality system acc. to DIN EN ISO/IEC 17025. For all measurements shown in this report, the measurement uncertainty of the test laboratory, CSA Group Bayern GmbH, is below the measurement uncertainty as defined by CISPR. Therefore, no special measures must be taken into consideration with regard to the limits according to CISPR. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Measurement Type	Range	Confidence Level	Calculated Uncertainty
AC power line conducted emissions	0.15 MHz to 30 MHz	95%	± 3.29 dB
EBW and OBW	2400 MHz to 30000 MHz	95%	$\pm 2.5 \times 10^{-7}$
Output power ERP, radiated	1000 MHz to 7000 MHz	95%	± 2.71 dB
Field strength of the fundamental	1000 MHz to 7000 MHz	95%	± 2.71 dB
Power spectral density	2400 MHz to 3000 MHz	95%	± 0.62 dB
Spurious Emissions, conducted	9 kHz to 10000 MHz	95%	± 2.15 dB
Spurious Emissions, conducted	10000 MHz to 40000 MHz	95%	± 3.47 dB
Spurious Emissions, radiated	9 kHz to 30 MHz	95%	± 3.53 dB
Spurious Emissions, radiated	30 MHz to 1000 MHz	95%	± 4.44 dB
Spurious Emissions, radiated	1000 MHz to 30000 MHz	95%	± 2.34 dB
Spurious Emissions, radiated	30000 MHz to 40000 MHz	95%	± 5.13 dB

4.4 Conformity Decision Rule

The conformity decision rule is based on the ILAC G8 published at the time of reporting.

4.5 Measurement protocol for FCC and ISCED

4.5.1 General information

CSA Group Bayern GmbH is recognized as wireless testing laboratory under the CAB identifier:

FCC: DE 0011
ISED: DE0009

4.5.2 General Standard information

The test methods used comply with ANSI C63.10 - "Testing Unlicensed Wireless Devices".


4.5.2.1 Justification

The equipment under test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions.

4.5.3 Details of test procedures

4.5.3.1 Conducted emission

Test setup according ANSI C63.10

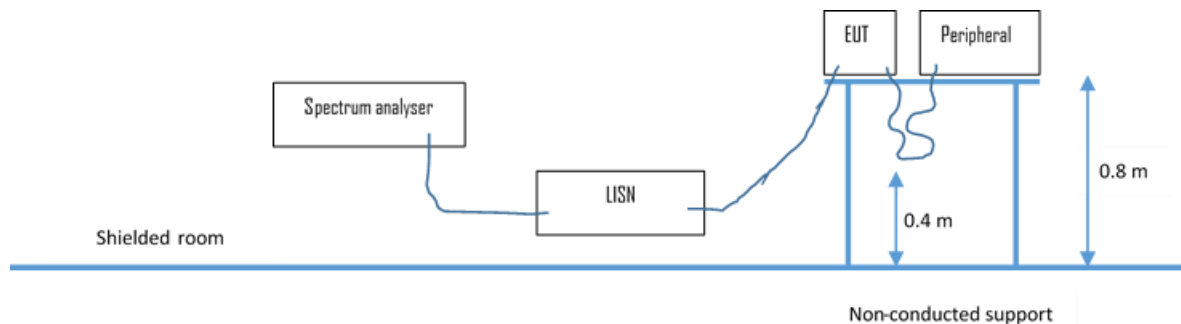

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the Spectrum analyser. This level is compared to the limit.

To convert between dB μ V and μ V, the following conversions apply:


$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$

$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EUT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection and a Line Impedance Stabilization Network (LISN) with 50 Ω / 50 μ H (CISPR 16) characteristics. The receiver is protected by means of an impedance matched pulse limiter connected directly to the RF input. Table top equipment is placed on a non-conducting table 80 centimetres above the floor and is positioned 40 centimetres from the vertical ground plane (wall) of the screen room. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emission is re-measured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.


4.5.3.2 Radiated emission

4.5.3.2.1 OATS1 test site (9 kHz - 30 MHz):
Test setup according ANSI C63.10

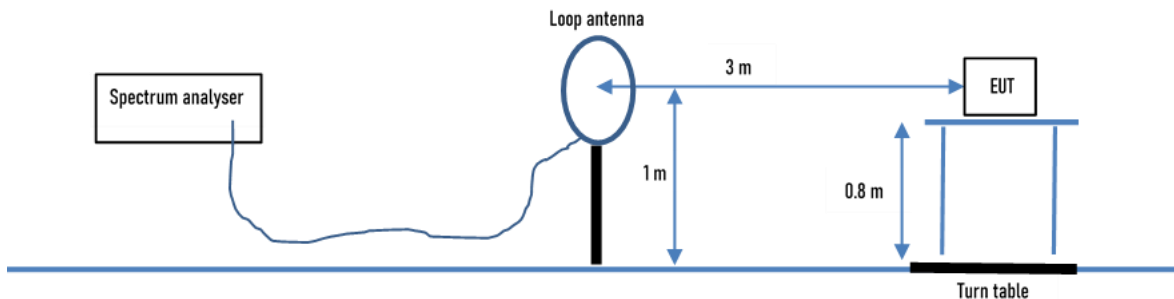

Emissions from the EUT are measured in the frequency range of 9 MHz to 30 MHz using a tuned receiver and a calibrated loop antenna. Table top equipment is placed on a 1.0 X 1.5 m non-conducting table 80 centimetres above the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screened room located outside the test area. The antenna is positioned 3, 10 or 30 metres horizontally from the EUT and is repeated vertically. To locate maximum emissions from the test sample the antenna is varied along the site axis and the EUT is rotated 360 degrees.

4.5.3.2.2 OATS1 test site (30 MHz - 1 GHz):
Test setup according ANSI C63.10.

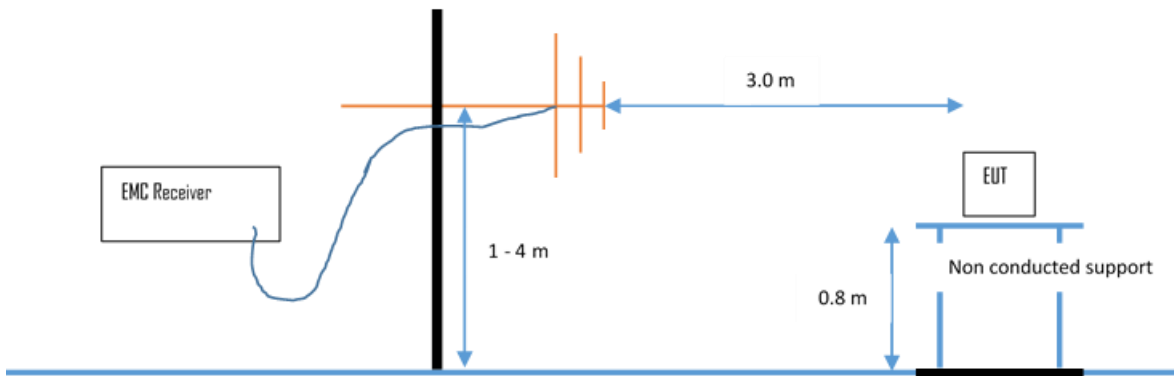

Spurious emissions from the EUT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarised antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 m non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screened room located outside the test area. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 metres and the EUT is rotated 360 degrees. The final level in dBµV/m is calculated by taking the reading from the EMI receiver (Level dBµV) and adding the correction factors and cable loss factor (dB). The FCC limit is subtracted from this result in order to provide the limit margin listed in the measurement protocol.


The resolution bandwidth setting:
30 MHz – 1000 MHz: RBW: 120 kHz

Example:

Frequency (MHz)	Level (dBµV)	+	Factor (dB)	=	Level (dBµV/m)	-	Limit (dBµV/m)	=	Delta (dB)
719.0	75.0	+	32.6	=	107.6	-	110.0	=	-2.4


4.5.3.2.3 Anechoic chamber 1 (1000 MHz – 18000 MHz)

Test setup according ANSI C63.10.

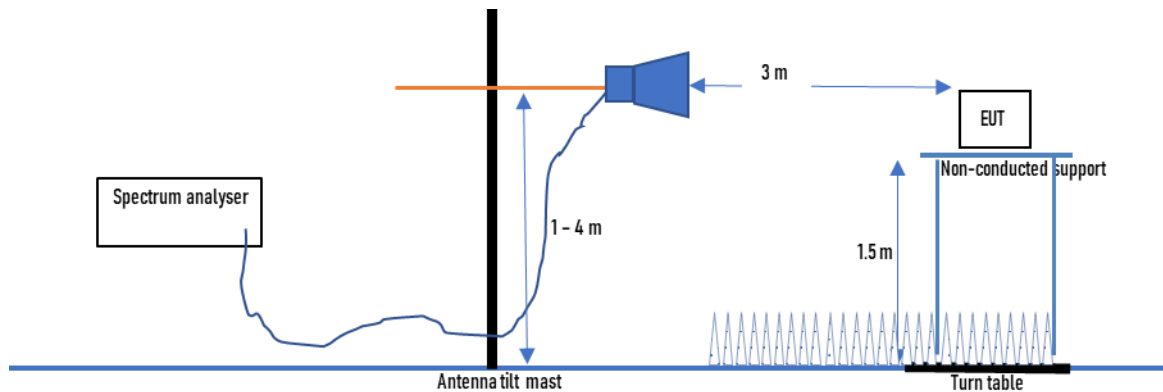

Radiated emissions from the EUT are measured in the frequency range 1 GHz up to 18 GHz as specified in 47 CFR Part 15, Subpart A, Section 15.33, using a spectrum analyser and appropriate linearly polarized antennas. Table top equipment is placed on a non-conducting table, 1.5 metre above the ground plane. The turntable is fully covered with the appropriate absorber (Type VHP-12). Any controlling device is positioned such that it does not significantly influence the measurement results. Interconnecting cables that hang closer than 40 cm to the ground plane are folded back and forth in the center, forming a bundle 30 cm to 40 cm long. Measurements are made in three orientations of the EUT and the horizontal and vertical polarization planes of measurement antenna in a fully anechoic room. The measurement antenna is adjusted and the EUT orientated to permit the measurement of the maximum emission from the EUT. The conditions determined as worst-case will then be used for the final measurements.

4.5.3.2.4 Anechoic chamber 1 (18 GHz – 40 GHz)

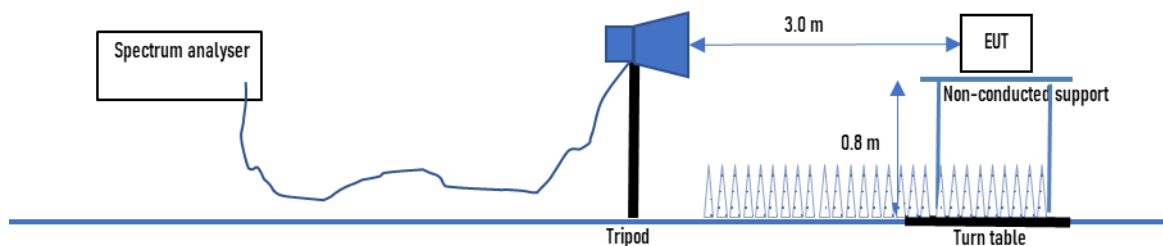

Emissions from the EUT are measured in the frequency range 18 GHz up to 40 GHz as specified in 47 CFR Part 15, Subpart A, Section 15.33, using a spectrum analyser and appropriate linearly polarized antennas. Table top equipment is placed on a non-conducting table, 0.8 metre above the ground plane. The turntable is fully covered with the appropriate absorber (Type VHP-12). Any controlling device is positioned such that it does not significantly influence the measurement results. Interconnecting cables that hang closer than 40 cm to the ground plane are folded back and forth in the center, forming a bundle 30 cm to 40 cm long. Measurements are made in three orientations of the EUT and the horizontal and vertical polarization planes of measurement antenna in a fully anechoic room. The measurement antenna is adjusted and the EUT orientated to permit the measurement of the maximum emission from the EUT. The conditions determined as worst-case will then be used for the final measurements. Where appropriate, the test distance may be reduced in order to detect emissions under better uncertainty. The limit is adopted.

5 TEST CONDITIONS AND RESULTS

5.1 AC power line conducted emissions

For test instruments and accessories used see section 6 Part A 4.

5.1.1 Description of the test location

Test location: Shielded Room S2

5.1.2 Photo documentation of the test set-up



5.1.3 Applicable standard

According to FCC Part 15, Section 15.207(a):

Except as shown in paragraphs (b) and (c) of this Section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits under FCC 15.207(a).

5.1.4 Description of Measurement

The measurements are performed following the procedures set out in ANSI C63.10 described under item 4.4.3. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emissions are re-measured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

5.1.5 Test result

Frequency range: 0.15 MHz - 30 MHz

Min. limit margin -16.01 dB

Limit according to FCC Part 15, Section 15.207(a):

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50


* Decreases with the logarithm of the frequency

The requirements are **FULFILLED**.

Remarks: For detailed test result please refer to following test protocols


The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

5.1.6 Test protocol

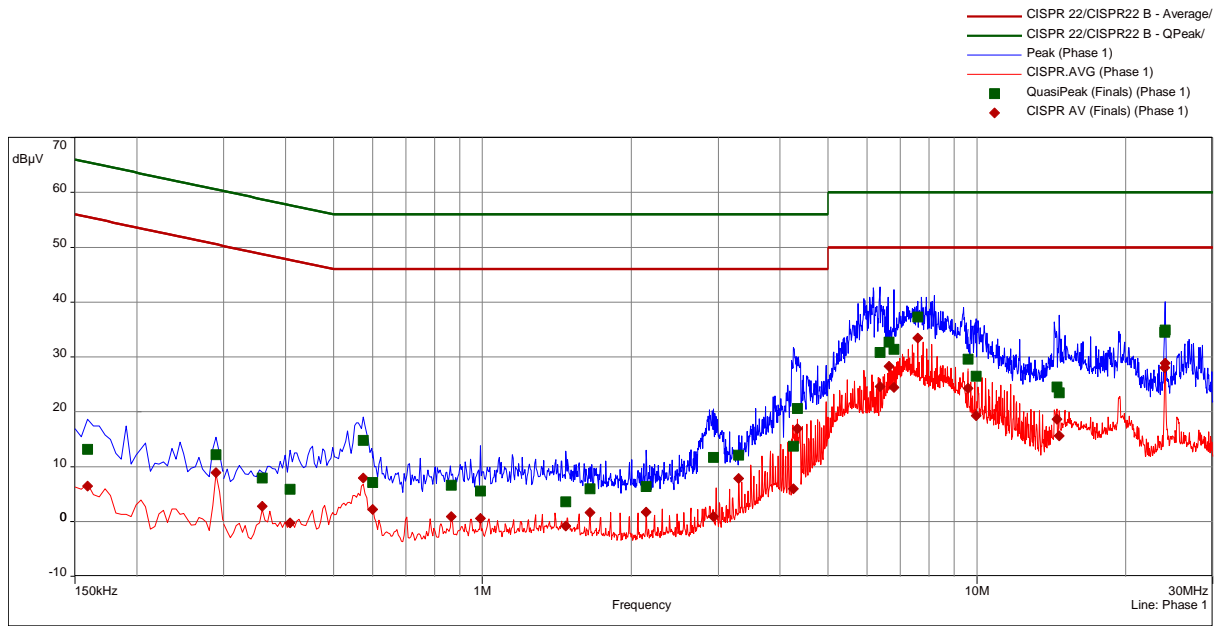

freq	SR	QP	margin	limit	AV	margin	limit	line	corr
MHz		dB(μV)	dB	dB	dB(μV)	dB	dB		dB
0.16	1	13.13	-52.39	65.52	6.43	-49.08	55.52	Phase 1	10.14
0.29	1	12.17	-48.37	60.54	8.91	-41.63	50.54	Phase 1	10.17
0.36	2	7.91	-50.85	58.76	2.74	-46.02	48.76	Phase 1	10.19
0.41	2	5.91	-51.78	57.69	-0.28	-47.97	47.69	Phase 1	10.20
0.57	2	14.78	-41.22	56.00	7.93	-38.07	46.00	Phase 1	10.22
0.60	3	7.12	-48.88	56.00	2.17	-43.83	46.00	Phase 1	10.22
0.87	3	6.59	-49.41	56.00	0.87	-45.13	46.00	Phase 1	10.25
0.99	3	5.54	-50.46	56.00	0.52	-45.48	46.00	Phase 1	10.26
1.47	4	3.58	-52.42	56.00	-0.83	-46.83	46.00	Phase 1	10.33
1.65	4	5.97	-50.03	56.00	1.65	-44.35	46.00	Phase 1	10.34
2.15	4	6.39	-49.61	56.00	1.72	-44.28	46.00	Phase 1	10.36
2.94	5	11.66	-44.34	56.00	0.87	-45.13	46.00	Phase 1	10.43
3.30	5	12.07	-43.93	56.00	7.83	-38.17	46.00	Phase 1	10.44
4.26	5	13.75	-42.25	56.00	5.96	-40.04	46.00	Phase 1	10.52
4.34	5	20.56	-35.44	56.00	16.94	-29.06	46.00	Phase 1	10.52
6.37	6	30.81	-29.19	60.00	24.59	-25.41	50.00	Phase 1	10.68
6.65	6	32.71	-27.29	60.00	28.31	-21.69	50.00	Phase 1	10.70
6.80	6	31.38	-28.62	60.00	24.46	-25.54	50.00	Phase 1	10.72
7.59	6	37.27	-22.73	60.00	33.48	-16.52	50.00	Phase 1	10.77
9.60	7	29.57	-30.43	60.00	24.28	-25.72	50.00	Phase 1	10.87
9.98	7	26.49	-33.51	60.00	19.31	-30.69	50.00	Phase 1	10.89
14.53	7	24.51	-35.49	60.00	18.66	-31.34	50.00	Phase 1	11.30
14.69	7	23.43	-36.57	60.00	15.62	-34.38	50.00	Phase 1	11.31

24.00	8	34.52	-25.48	60.00	28.01	-21.99	50.00	Phase 1	11.74
24.02	8	34.95	-25.05	60.00	28.87	-21.13	50.00	Phase 1	11.74

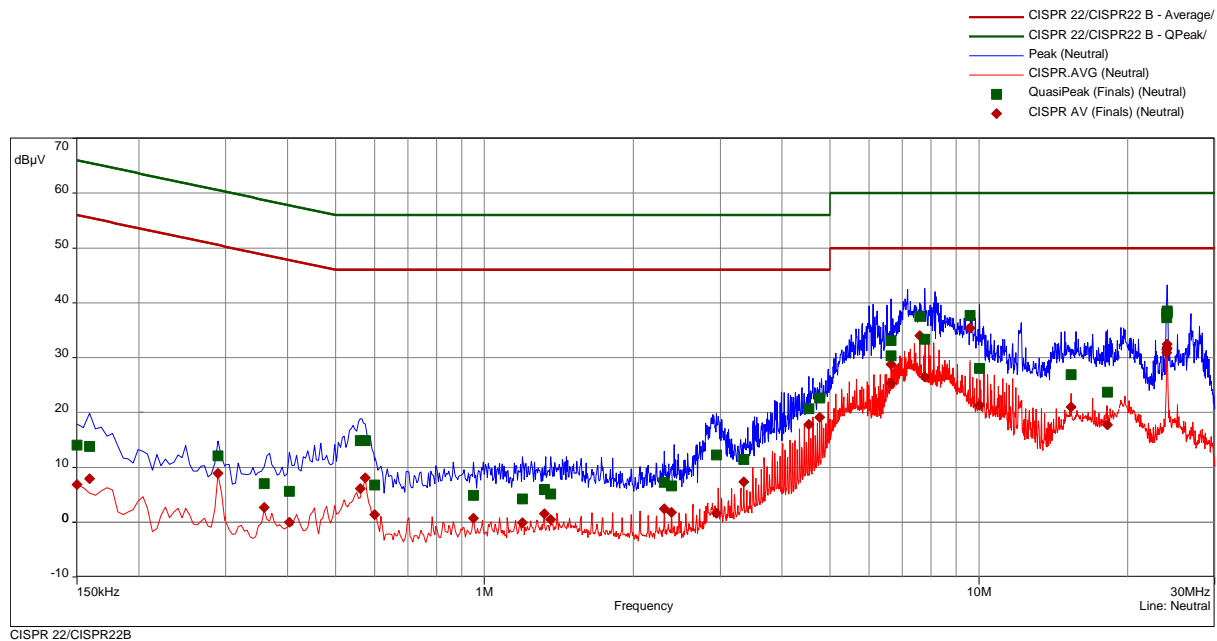

freq	SR	QP	margin	limit	AV	margin	limit	line	corr
MHz		dB(μV)	dB	dB	dB(μV)	dB	dB		dB
0.15	9	14.03	-51.97	66.00	6.88	-49.12	56.00	Neutral	10.14
0.16	9	13.84	-51.68	65.52	7.90	-47.62	55.52	Neutral	10.15
0.29	9	12.10	-48.43	60.54	8.88	-41.66	50.54	Neutral	10.18
0.36	10	7.02	-51.74	58.76	2.71	-46.05	48.76	Neutral	10.20
0.40	10	5.64	-52.14	57.78	-0.03	-47.82	47.78	Neutral	10.20
0.56	10	14.89	-41.11	56.00	6.15	-39.85	46.00	Neutral	10.22
0.57	10	14.84	-41.16	56.00	8.11	-37.89	46.00	Neutral	10.22
0.60	11	6.81	-49.19	56.00	1.41	-44.59	46.00	Neutral	10.22
0.95	11	4.91	-51.09	56.00	0.75	-45.25	46.00	Neutral	10.26
1.19	11	4.23	-51.77	56.00	-0.08	-46.08	46.00	Neutral	10.29
1.32	12	5.98	-50.02	56.00	1.56	-44.44	46.00	Neutral	10.31
1.36	12	5.10	-50.90	56.00	0.47	-45.53	46.00	Neutral	10.31
2.31	12	7.25	-48.75	56.00	2.41	-43.59	46.00	Neutral	10.38
2.39	12	6.63	-49.37	56.00	1.76	-44.24	46.00	Neutral	10.39
2.94	13	12.22	-43.78	56.00	1.59	-44.41	46.00	Neutral	10.43
3.35	13	11.44	-44.56	56.00	7.38	-38.62	46.00	Neutral	10.45
4.53	13	20.72	-35.28	56.00	17.83	-28.17	46.00	Neutral	10.55
4.76	13	22.63	-33.37	56.00	19.11	-26.89	46.00	Neutral	10.56
6.65	14	30.32	-29.68	60.00	25.37	-24.63	50.00	Neutral	10.74
6.65	14	33.14	-26.86	60.00	28.78	-21.22	50.00	Neutral	10.74
7.59	14	37.52	-22.48	60.00	33.99	-16.01	50.00	Neutral	10.82

7.77	14	33.39	-26.61	60.00	26.46	-23.54	50.00	Neutral	10.83
9.60	15	37.70	-22.30	60.00	35.37	-14.63	50.00	Neutral	10.95
10.04	15	28.04	-31.96	60.00	21.37	-28.63	50.00	Neutral	10.98
15.37	15	26.91	-33.09	60.00	21.01	-28.99	50.00	Neutral	11.53
18.19	15	23.67	-36.33	60.00	17.73	-32.27	50.00	Neutral	11.76
24.00	16	37.31	-22.69	60.00	30.89	-19.11	50.00	Neutral	12.05
24.00	16	38.03	-21.97	60.00	31.52	-18.48	50.00	Neutral	12.05
24.02	16	38.53	-21.47	60.00	32.45	-17.55	50.00	Neutral	12.05
24.02	16	38.19	-21.81	60.00	31.75	-18.25	50.00	Neutral	12.05

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.


5.2 Maximum peak conducted output power

For test instruments and accessories used see section 6 Part **CPR 3**.

5.2.1 Description of the test location

Test location: Shielded Room S4

5.2.2 Photo documentation of the test set-up

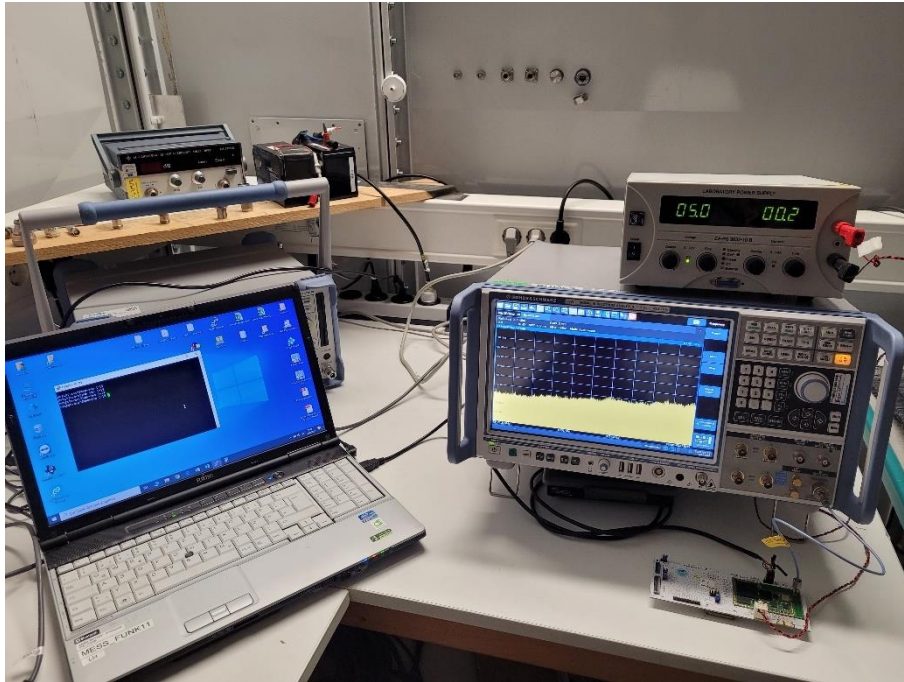

5.2.3 Applicable standard

According to FCC Part 15, Section 15.247 (b)(3):

For systems using digital modulation in the 2400 – 2483.5 MHz and 5725 – 5850 MHz bands, the maximum peak output power of the transmitter shall not exceed **1 Watt**. The limit is based on transmitting antennas of directional gain that do not exceed 6 dBi.

5.2.4 Description of Measurement

The maximum peak radiated output power is measured using a spectrum analyser following the procedure set out in ANSI C63.10, item 11.9.2.2. The EUT is set in TX continuous mode while measuring. The radiated measurement was performed in terms of fieldstrength. Therefore, the formula set out in ANSI C63.10, item 9.5 (Equation 22) is changed into the following term:

$$E = \text{EIRP} - (20 \cdot \log_{10}(3)) + 104.77$$

5.2.5 Test result

Conducted Measurement					
FCC §15.247 (b)(3) RSS-247 5.4 (d)					
Modulation	Channel	Frequency	Measured Conducted TX Power	Conducted Tx-Power Limit	Margin
		MHz	dBm	dBm	dB
802.11b, 1 Mbps	CH1	2412	17.7	30.0	-12.4
	CH6	2437	17.1	30.0	-12.9
	CH11	2462	17.7	30.0	-12.3
802.11n, HT20, MCS0	CH1	2412	21.6	30.0	-8.4
	CH6	2437	21.0	30.0	-9.0
	CH11	2462	21.2	30.0	-8.8

Peak Power Limit according to FCC Part 15, Section 15.247(b)(3):

Frequency (MHz)	Peak Power Limit	
	(dBm)	(W)
2400-2483.5	30	1.0

The requirements are **FULFILLED**.

Remarks: None.

5.3 Radiated emissions in restricted bands

For test instruments and accessories used see section 6 Part **SER 2**, **SER 3**.

5.3.1 Description of the test location

Test location: OATS 1
 Test location: Anechoic chamber 1
 Test distance: 3 m


5.3.2 Photo documentation of the test set-up


Open area test site



Anechoic chamber

Test Setup 1000 MHz < f < 18000 MHz

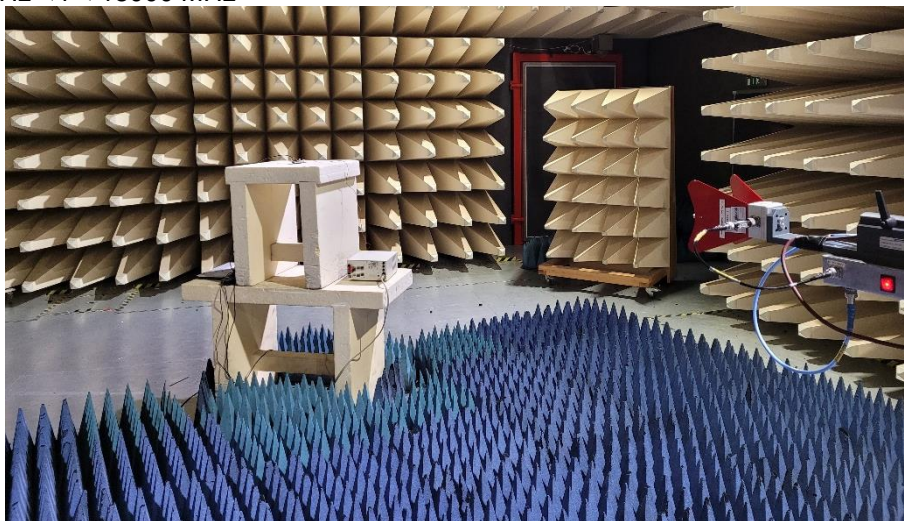

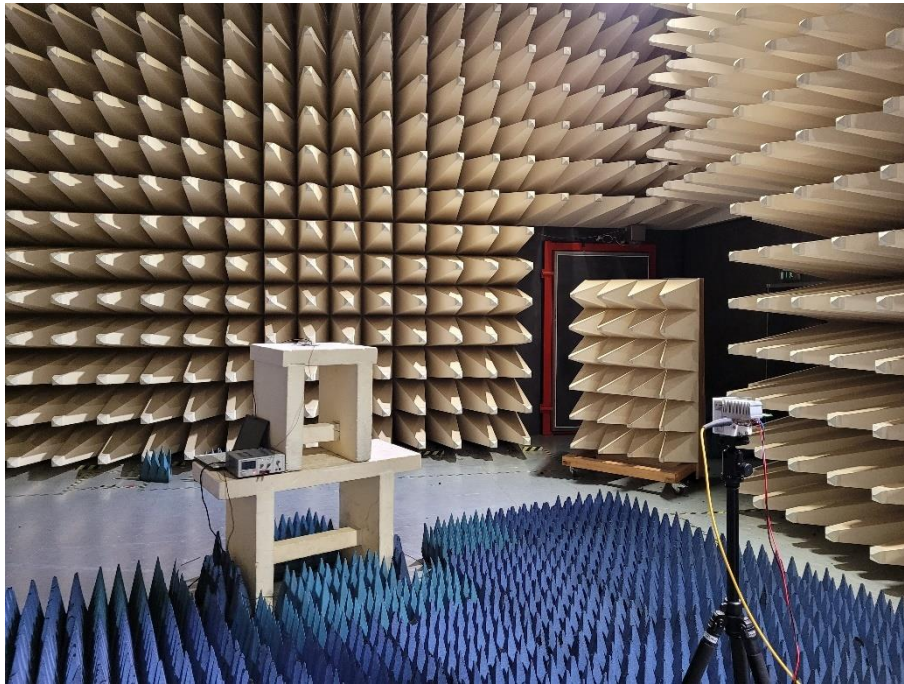Test Setup $f > 18000$ MHz

5.3.3 Applicable standard

According to FCC Part 15, Section 15.205(a):

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limit specified in Section 15.209(a).

5.3.4 Description of Measurement

The restricted bands are measured radiated. The span of the spectrum analyser is set wide enough to capture the restricted band and measure the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation. The restricted bands are measured falling emissions into it and the nearest restricted band are checked for emissions also the restricted band for the harmonics of the carrier.

Spectrum analyser settings:

30 MHz – 1000 MHz: RBW: 120 kHz

1000 MHz – 26 GHz: RBW: 1 MHz, VBW: 3 MHz, Sweep: Auto, Detector function: Max Peak


5.3.1 Test result

$f < 1000$ MHz


Frequency (MHz)	Reading Vert. (dB μ V)	Reading Hor. (dB μ V)	Correct. Vert. (dB)	Correct. Hor. (dB)	Level Vert. (dB μ V/m)	Level Hor. (dB μ V/m)	Limit (dB μ V/m)	Dlimit (dB)
50.00	3.2	-2.5	15.2	14.2	18.4	11.7	40.0	-21.6
150.00	-0.5	-0.6	13.9	14.8	13.4	14.2	43.5	-29.3
300.00	5.2	1.5	16.9	16.5	22.1	18.0	46.0	-23.9
500.00	-2.3	1.1	22.5	22.3	20.2	23.4	46.0	-22.6
750.00	-3.0	-3.1	28.3	27.7	25.3	24.6	46.0	-20.7

Note: No emissions below 1 GHz are identified. Shown values are noise from the measurement site.


f > 1000 MHz:
5.3.1.1 WLAN Standard 802.11b, 1 Mbps
f > 1000 MHz
Detailed band-edges CH1:

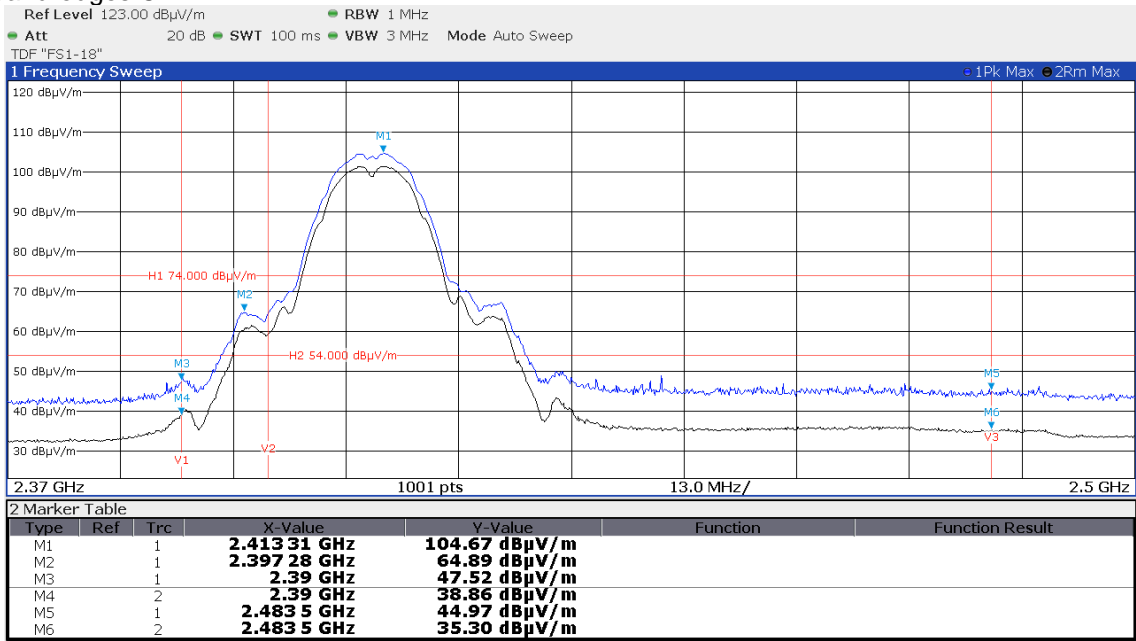


Detailed band-edges CH11:

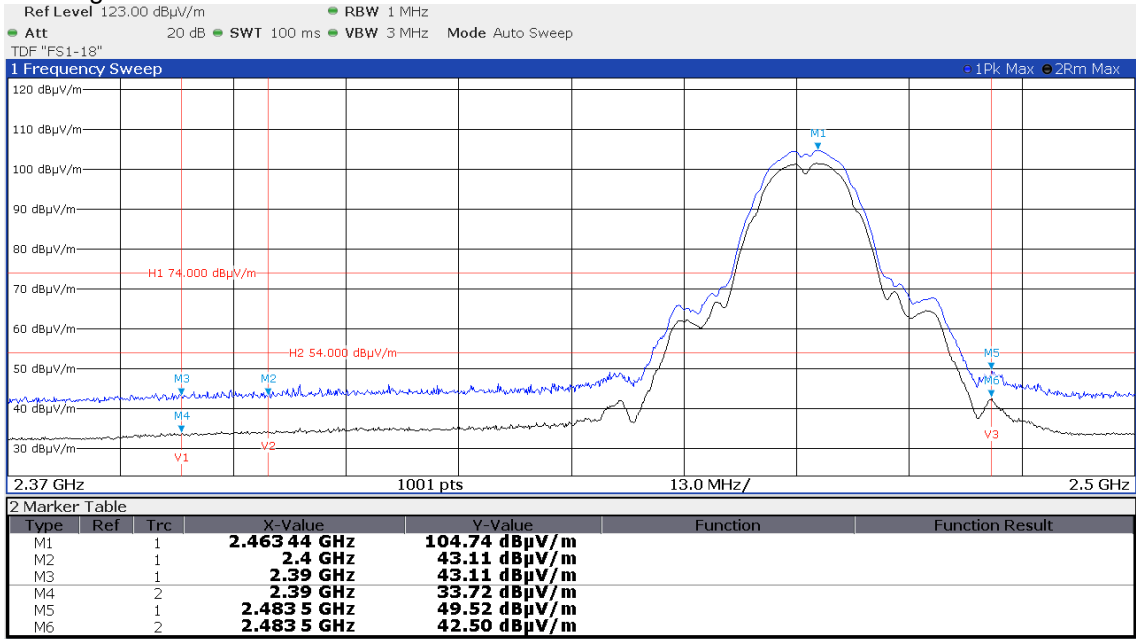


CH1: Emissions 1 GHz – 4 GHz:

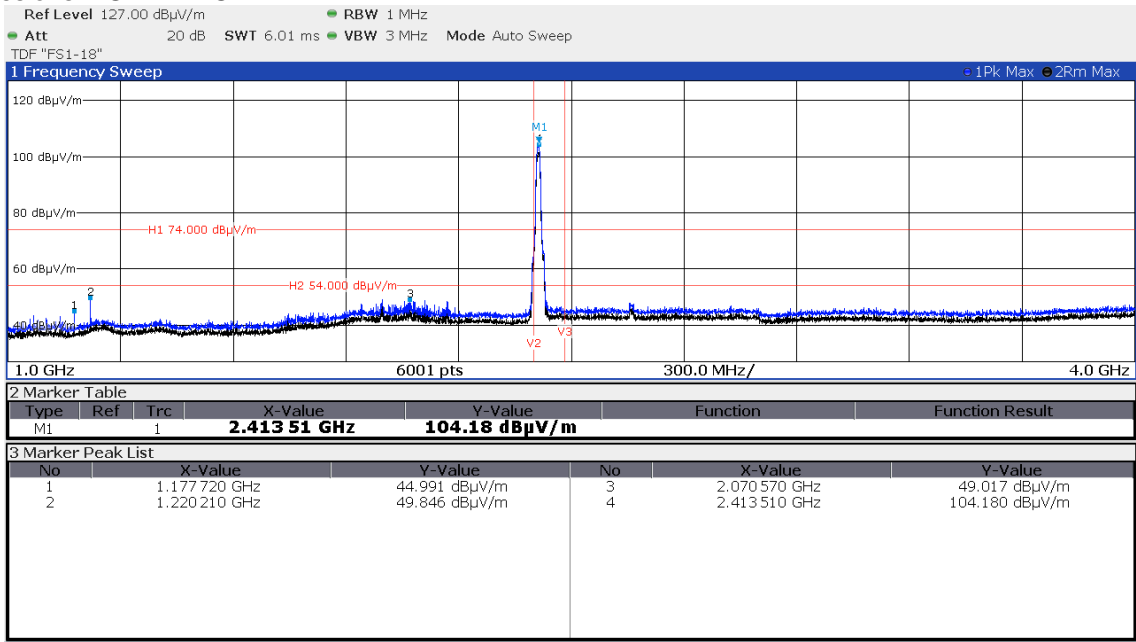


CH1: Emissions 4 GHz – 18 GHz:

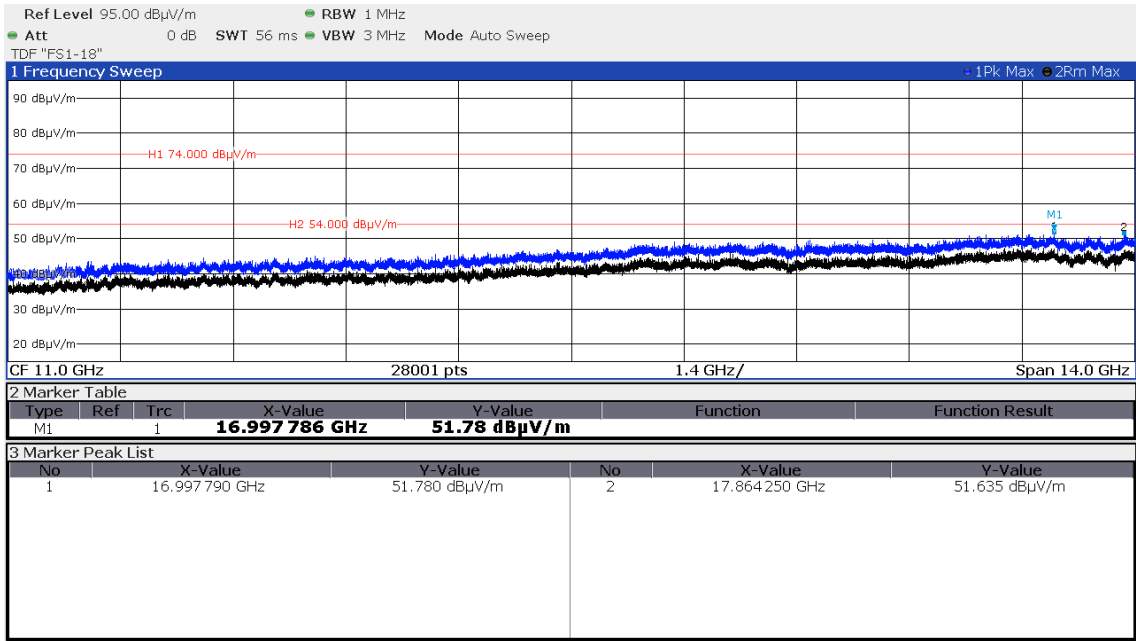

CH11: Emissions 1 GHz – 4 GHz:

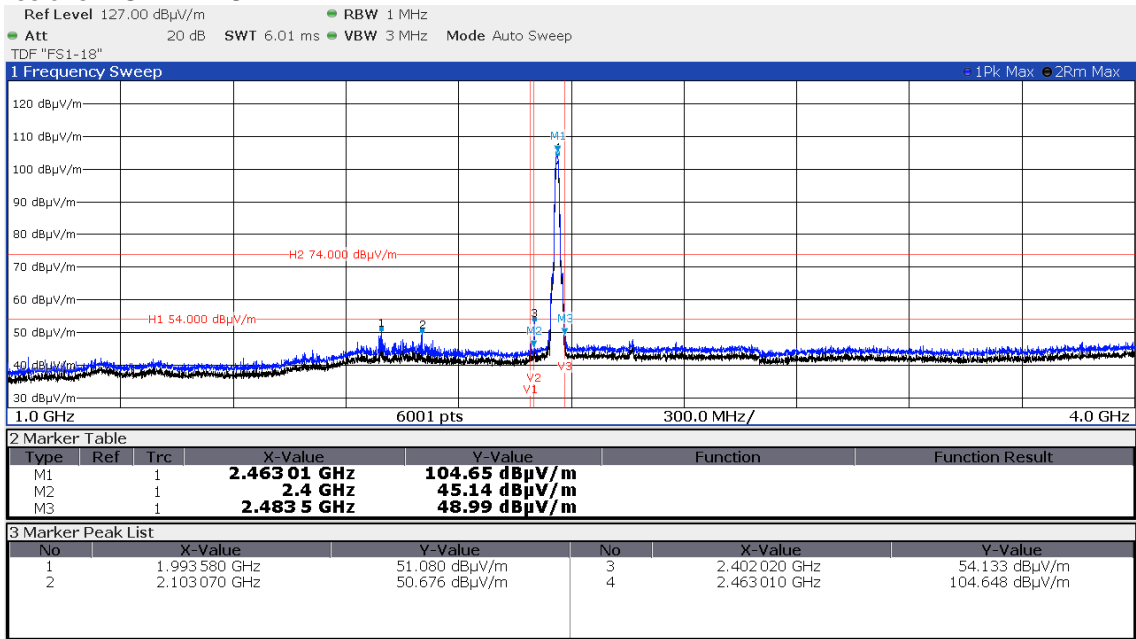


CH11: Emissions 4 GHz – 18 GHz:

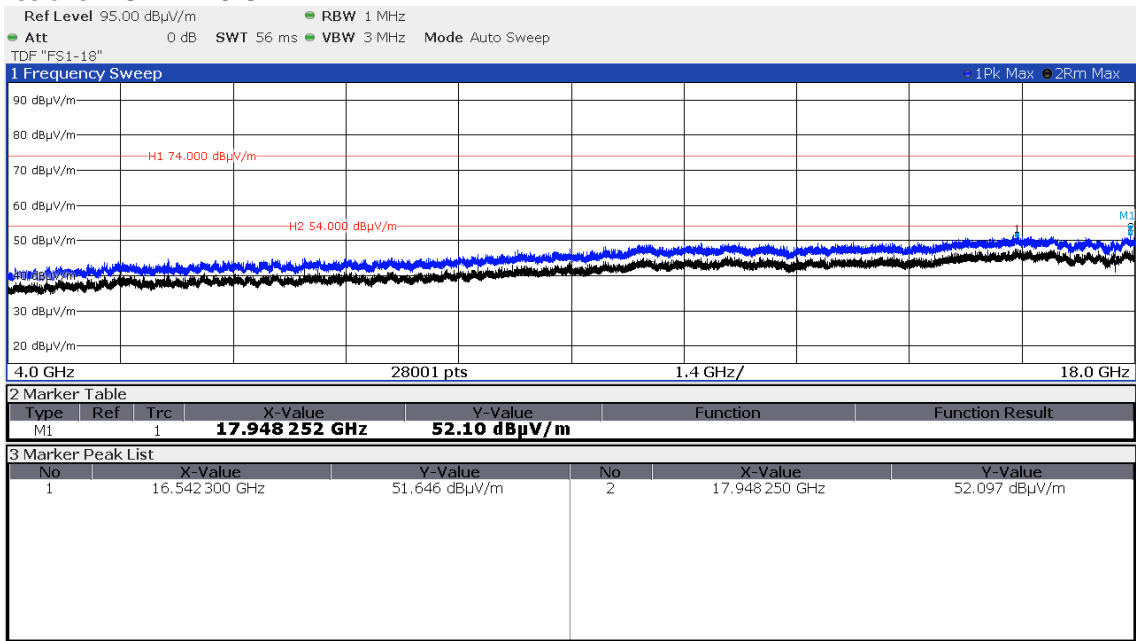


5.3.1.2 WLAN Standard 802.11n HT20, MCS7

f > 1000 MHz


Detailed band-edges CH1:

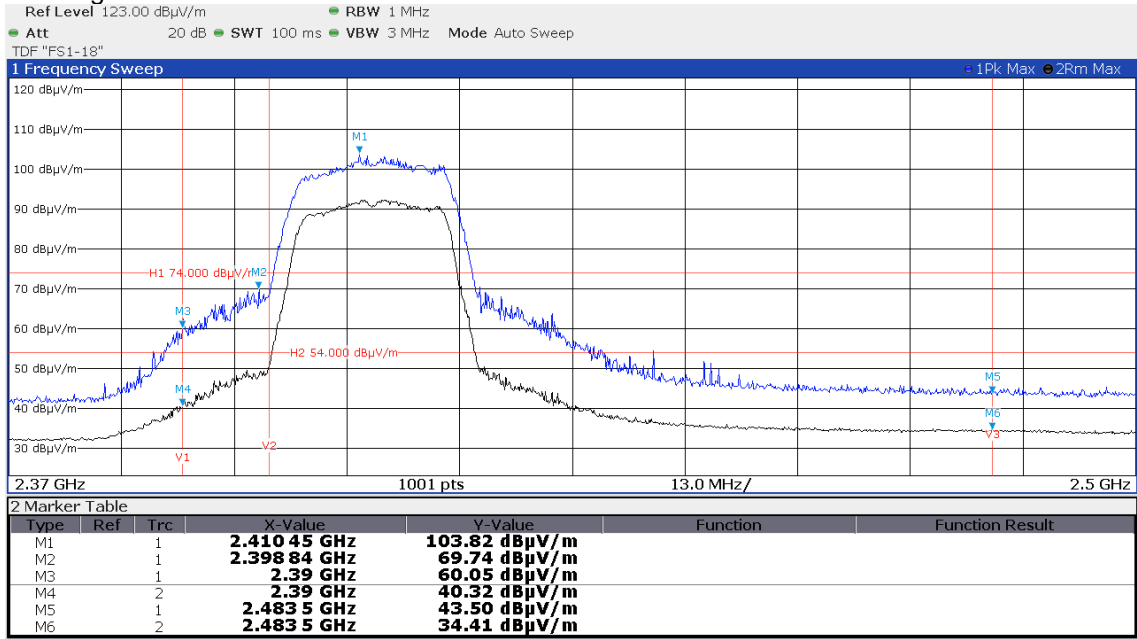


Detailed band-edges CH11:

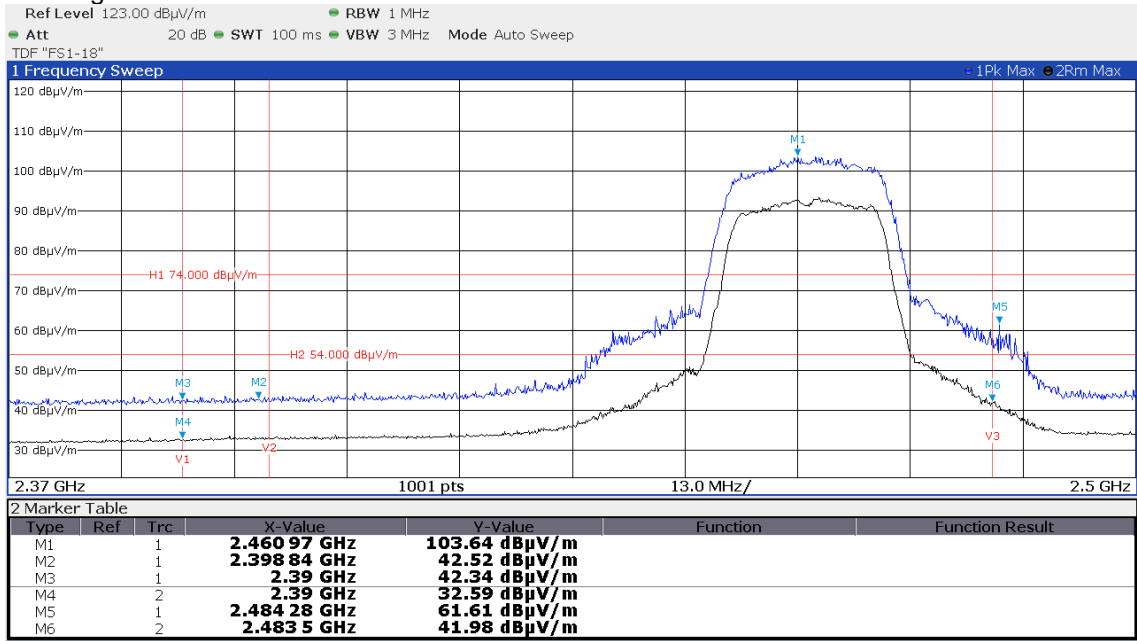


CH1: Emissions 1 GHz – 4 GHz:

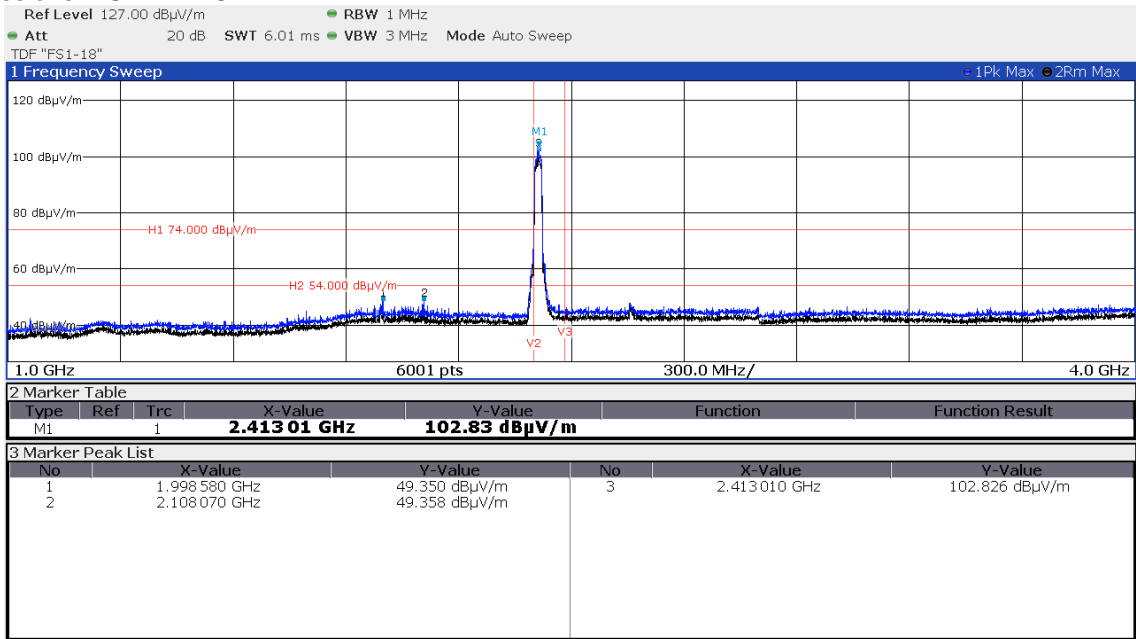


CH1: Emissions 4 GHz – 18 GHz:

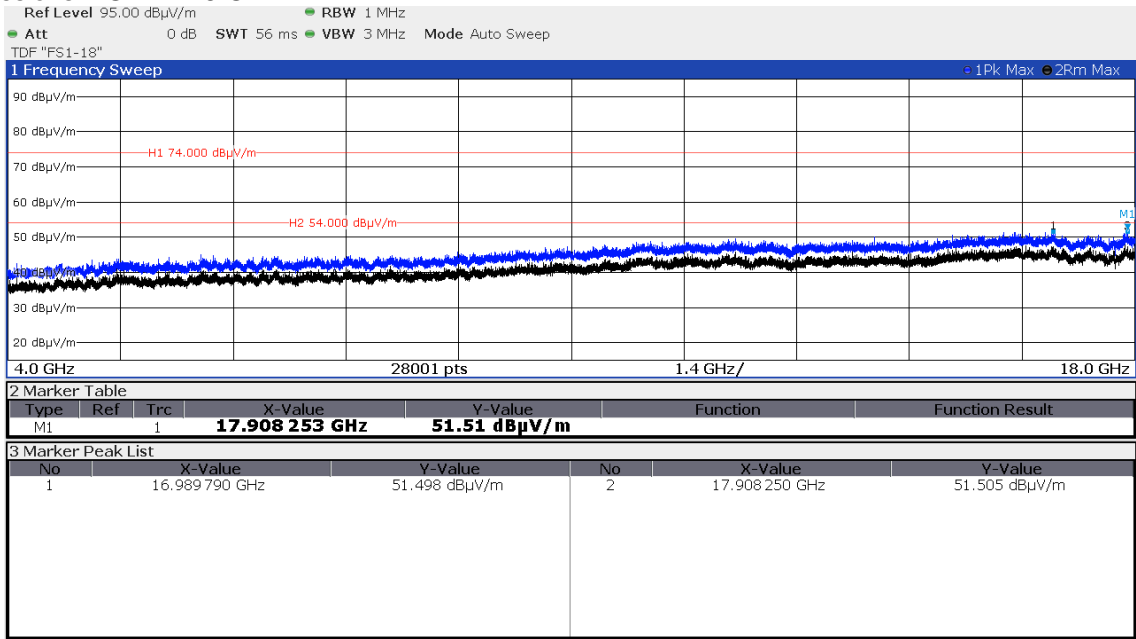

CH11: Emissions 1 GHz – 4 GHz:

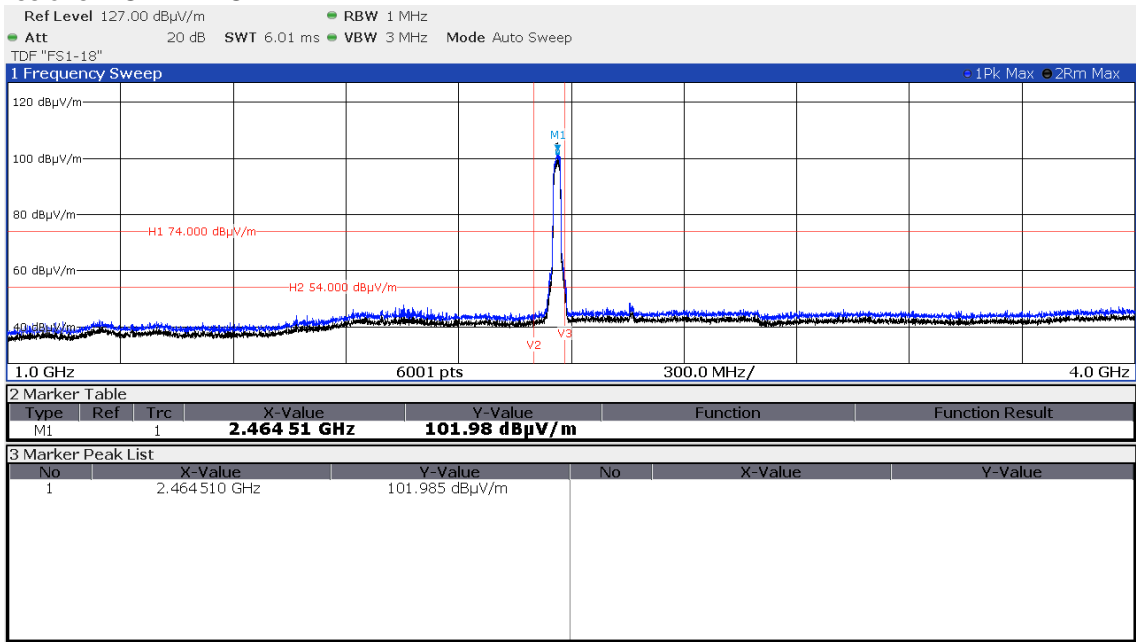


CH11: Emissions 4 GHz – 18 GHz:

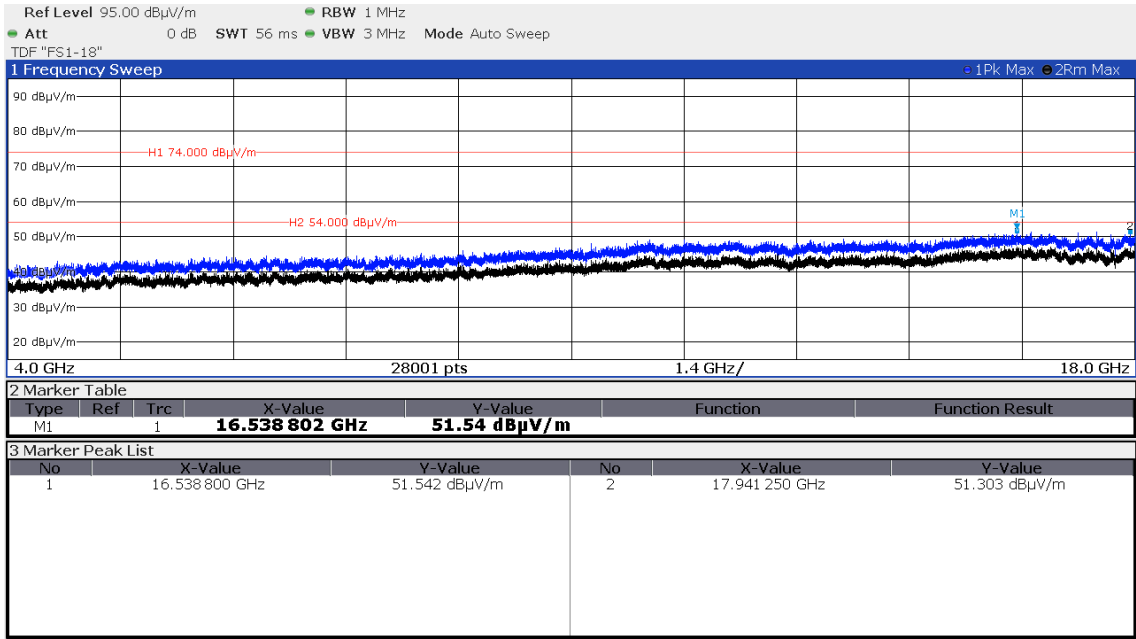

Note: No emissions in the frequency span 18 GHz – 26 GHz were detected at any operation mode.

Emissions 18 GHz – 25 GHz:

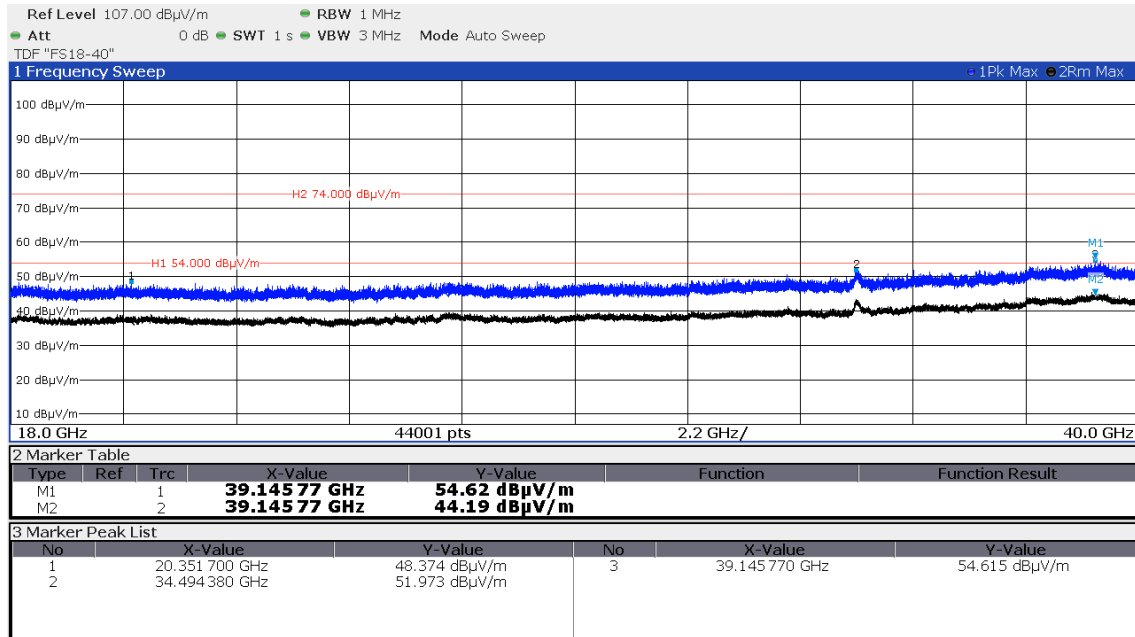

Radiated limits according to FCC Part 15 Section 15.209(a) for spurious emissions which fall in restricted bands:

Frequency (MHz)	Field strength of spurious emissions (μV/m) dB(μV/m)		Measurement distance (metres)
0.009-0.490	2400/F (kHz)		300
0.490-1.705	24000/F (kHz)		30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Restricted bands of operation:

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.41425 – 8.41475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	Above 38.6

RSS-Gen, Table 6 – Restricted Frequency Bands

MHz	MHz	MHz	GHz
0.090 - 0.110	12.57675 - 12.57725	399.9 - 410	7.250 - 7.750
0.495 - 0.505	13.36 - 13.41	608 - 614	8.025 – 8.500
2.1735 - 2.1905	16.42 - 16.423	960 - 1427	9.0 - 9.2
3.020 - 3.026	16.69475 - 16.69525	1435 - 1626.5	9.3 - 9.5
4.125 - 4.128	16.80425 - 16.80475	1645.5 - 1646.5	10.6 - 12.7
4.17725 - 4.17775	25.5 - 25.67	1660 - 1710	13.25 - 13.4
4.20725 - 4.20775	37.5 - 38.25	1718.8 - 1722.2	14.47 - 14.5
5.677 - 5.683	73 - 74.6	2200 - 2300	15.35 - 16.2
6.215 - 6.218	74.8 - 75.2	2310 - 2390	17.7 - 21.4
6.26775 - 6.26825	108 – 138	2483.5 - 2500	22.01 - 23.12
6.31175 - 6.31225	149.9 - 150.05	2655 - 2900	23.6 - 24.0
8.291 - 8.294	156.52475 - 156.52525	3260 – 3267	31.2 - 31.8
8.362 - 8.366	156.7 - 156.9	3332 - 3339	36.43 - 36.5
8.37625 - 8.38675	162.0125 - 167.17	3345.8 - 3358	Above 38.6
8.41425 - 8.41475	167.72 - 173.2	3500 - 4400	
12.29 - 12.293	240 – 285	4500 - 5150	
12.51975 - 12.52025	322 - 335.4	5350 - 5460	

The requirements are **FULFILLED**.

Remarks: The measurement was performed up to the 10th harmonic (24.62 GHz).

Only the worst case plots are listed.

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

5.4 Antenna application

5.4.1 Applicable standard

According to FCC Part 15C, Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit that broken antennas can be replaced by the user, but the use of a standard antenna jack is prohibited.

The EUT has integrated PCB antennas. No other antennas can be used with the device.

All supplied antennas meet the requirements of part 15.203 and 15.204.

5.4.2 Antenna requirements

According to FCC Part 15C, Section 15.247(b)(4):

The conducted output power limit specified in paragraph (b) of 15.247 is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from intentional radiator shall be reduced below the stated values in paragraph (b)(1), (b)(2) and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Defacto EIRP-Limit:

$$P_{out} = 30 - (G_x - 6);$$

The EUT use antennas smaller than 6 dBi. No defacto limit results.

Remarks: No power reduction results from the defacto limit.

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model Type	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
A 4	BAT-EMC 3.21.0.24	01-02/68-13-001				
	ESCI	02-02/03-15-001	17/06/2023	17/06/2022		
	ESH 2 - Z 5	02-02/20-05-004	13/10/2025	13/10/2022	13/04/2023	13/10/2022
	N-4000-BNC	02-02/50-05-138				
	ESH 3 - Z 2	02-02/50-05-155	09/11/2022	09/11/2019	10/02/2023	10/08/2022
CPR 3	FSW43	02-02/11-15-001	22/04/2023	22/04/2022		
	AMF-6D-01002000-22-10P	02-02/17-15-004				
	3117	02-02/24-05-009	23/06/2023	23/06/2022		
	BAM 4.5-P	02-02/50-17-024				
	NCD	02-02/50-17-025				
	KK-SF106-2X11N-6,5M	02-02/50-18-016				
	BAT-EMC 3.21.0.24	02-02/68-13-001				
SER 2	ESVS 30	02-02/03-05-006	27/07/2023	27/07/2022		
	VULB 9168	02-02/24-05-005	20/12/2022	20/12/2021	03/07/2023	03/07/2022
	NW-2000-NB	02-02/50-05-113				
	KK-EF393/U-16N-21N20 m	02-02/50-12-018				
	KK-SD_7/8-2X21N-33,0M	02-02/50-15-028				
	50F-003 N 3 dB	02-02/50-21-010				
SER 3	FSW43	02-02/11-15-001	22/04/2023	22/04/2022		
	AMF-6D-01002000-22-10P	02-02/17-15-004				
	3117	02-02/24-05-009	23/06/2023	23/06/2022		
	BAM 4.5-P	02-02/50-17-024				
	NCD	02-02/50-17-025				
	KK-SF106-2X11N-6,5M	02-02/50-18-016				
	BAT-EMC 3.21.0.24	02-02/68-13-001				

-End of test report-

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.