



Exhibit: Test Setup Photos

FCC ID: 2AHFM-RINM
IC: 21164-RINM

Report File #: 7169003015-000


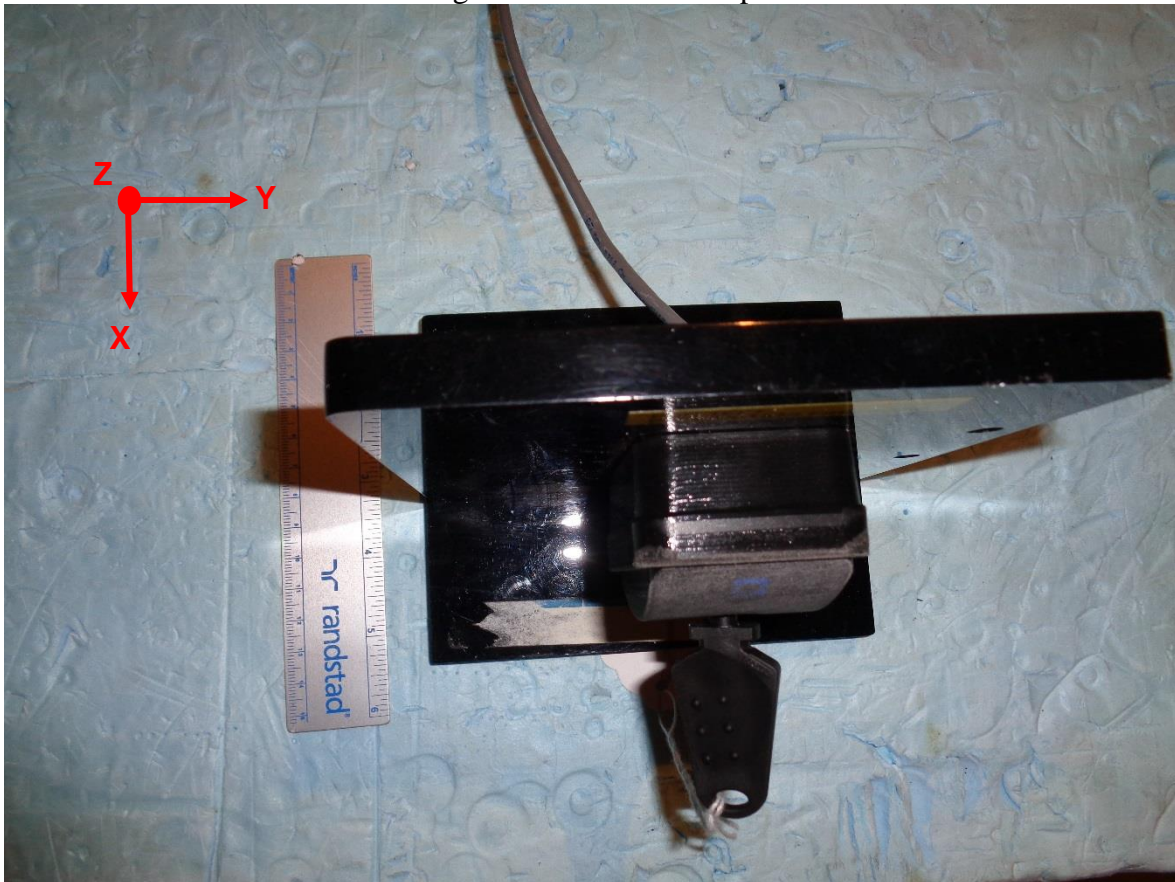
Client	Kaba Mas LLC	
Product	RINM Series, model: Insync Wall Reader	
Standard(s)	RSS-210 Issue 9:2016 FCC Part 15 Subpart 15.209:2016	

Figure 1 – EUT Close Up




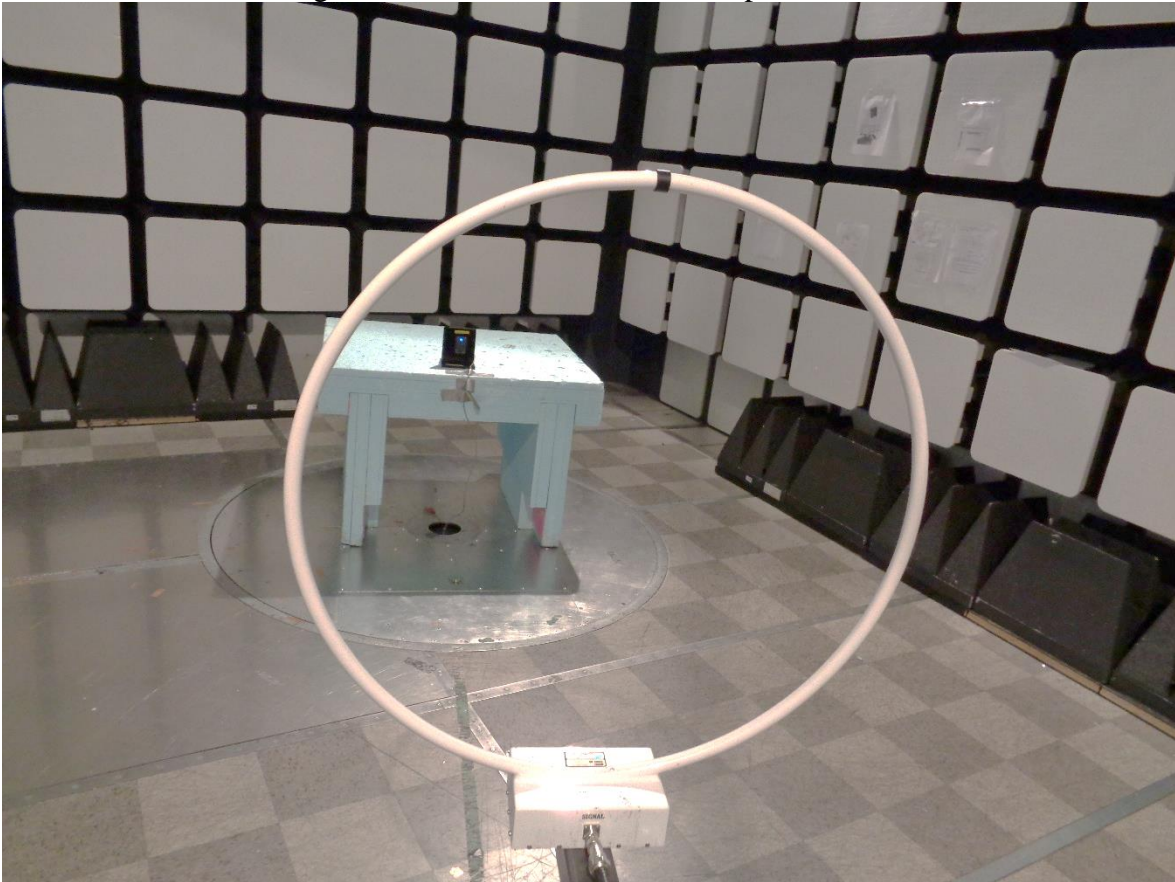
Client	Kaba Mas LLC	
Product	RINM Series, model: Insync Wall Reader	
Standard(s)	RSS-210 Issue 9:2016 FCC Part 15 Subpart 15.209:2016	

Figure 2 – Radiated Emissions Setup – Photo 1




Client	Kaba Mas LLC	
Product	RINM Series, model: Insync Wall Reader	
Standard(s)	RSS-210 Issue 9:2016 FCC Part 15 Subpart 15.209:2016	

Figure 3 – Radiated Emissions Setup – Photo 2




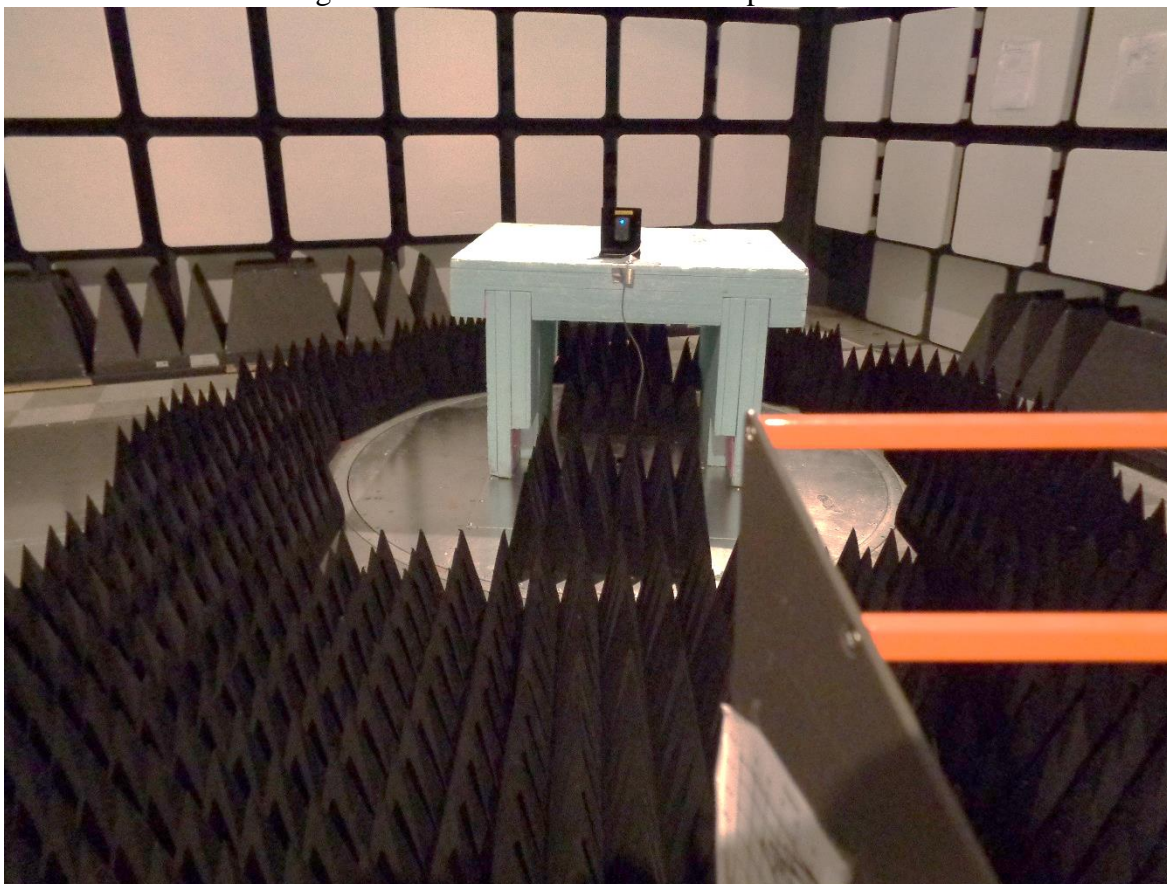
Client	Kaba Mas LLC	
Product	RINM Series, model: Insync Wall Reader	
Standard(s)	RSS-210 Issue 9:2016 FCC Part 15 Subpart 15.209:2016	

Figure 4 – Radiated Emissions Setup – Photo 3



Note: As per ANSI C63.10-2013 Clause 6.3.1, below 1GHz, the height of the EUT was set to 80cm.


Client	Kaba Mas LLC	
Product	RINM Series, model: Insync Wall Reader	
Standard(s)	RSS-210 Issue 9:2016 FCC Part 15 Subpart 15.209:2016	

Figure 5 – Magnetic field measurement setup




Client	Kaba Mas LLC	
Product	RINM Series, model: Insync Wall Reader	
Standard(s)	RSS-210 Issue 9:2016 FCC Part 15 Subpart 15.209:2016	

Figure 6 – Electric field measurement setup

