



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247

TEST REPORT

For

NotAnotherOne Inc.

100 Pine Street Suite 1250, San Francisco, California, United States

FCC ID: 2AHGD-ATMO-PL1

Report Type: Original Report	Product Name: The Portable Air Pollution Monitor
Report Number:	RDG181122006-00B
Report Date:	2018-12-04
Reviewed By:	Allen Qiao RF Supervisor
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE.....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY.....	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION.....	6
EQUIPMENT MODIFICATIONS.....	6
EUT EXERCISE SOFTWARE.....	6
SUPPORT EQUIPMENT LIST AND DETAILS.....	8
SUPPORT CABLE LIST AND DETAILS.....	8
BLOCK DIAGRAM OF TEST SETUP.....	8
SUMMARY OF TEST RESULTS.....	9
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE.....	10
APPLICABLE STANDARD.....	10
FCC §15.203 - ANTENNA REQUIREMENT.....	11
APPLICABLE STANDARD.....	11
ANTENNA INFORMATION AND CONNECTOR CONSTRUCTION.....	11
FCC §15.207 (a)– AC LINE CONDUCTED EMISSIONS.....	12
APPLICABLE STANDARD.....	12
EUT SETUP.....	12
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE.....	13
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	13
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST DATA.....	14
FCC §15.209, §15.205, §15.247(d) - SPURIOUS EMISSIONS.....	16
APPLICABLE STANDARD.....	16
EUT SETUP.....	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP.....	17
TEST PROCEDURE.....	17
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	17
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST DATA.....	18
FCC §15.247(a) (2) –6 dB EMISSION BANDWIDTH.....	25
APPLICABLE STANDARD.....	25
TEST PROCEDURE.....	25
TEST EQUIPMENT LIST AND DETAILS.....	25
TEST DATA.....	25
FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	30
APPLICABLE STANDARD.....	30
TEST PROCEDURE.....	30

TEST EQUIPMENT LIST AND DETAILS.....	30
TEST DATA	30
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST EQUIPMENT LIST AND DETAILS.....	35
TEST DATA	35
FCC §15.247(e) - POWER SPECTRAL DENSITY	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST EQUIPMENT LIST AND DETAILS.....	38
TEST DATA	38

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	The Portable Air Pollution Monitor
EUT Model:	Plus
FCC ID:	2AHGD-ATMO-PL1
Rated Input Voltage:	DC 3.7V from battery or DC 5V from adapter
External Dimension:	66 mm(L)* 22 mm(W)*22mm(H)
Serial Number:	181122006
EUT Received Date:	2018/11/23

Objective

This report is prepared on behalf of *NotAnotherOne Inc.* in accordance with Part 2, Subpart J, Part 15, Subparts A, and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209, 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and KDB 558074 D01 15.247 Meas Guidance v05.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode.

For Bluetooth LE mode, 40 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404
...
...
..	...	38	2478
19	2440	39	2480

EUT was tested with channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.


EUT Exercise Software

The software "IPOP 4.1" was used for testing, which was provided by manufacturer. The maximum power was configured as default setting.

The duty cycle as below:


Test Mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
BLE 1M	2.10	2.22	94.59
BLE 2M	1.06	1.19	89.08

BLE 1M:

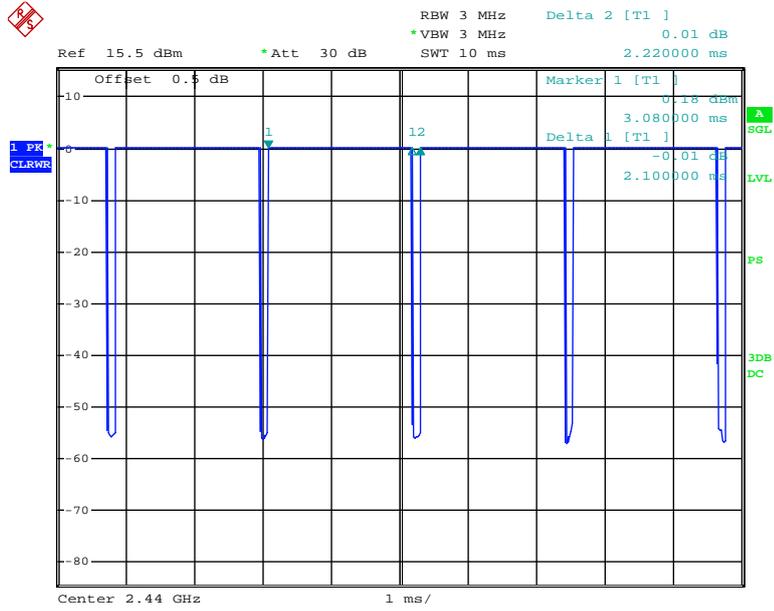

Date: 1.DEC.2018 00:26:09

BLE 2M:

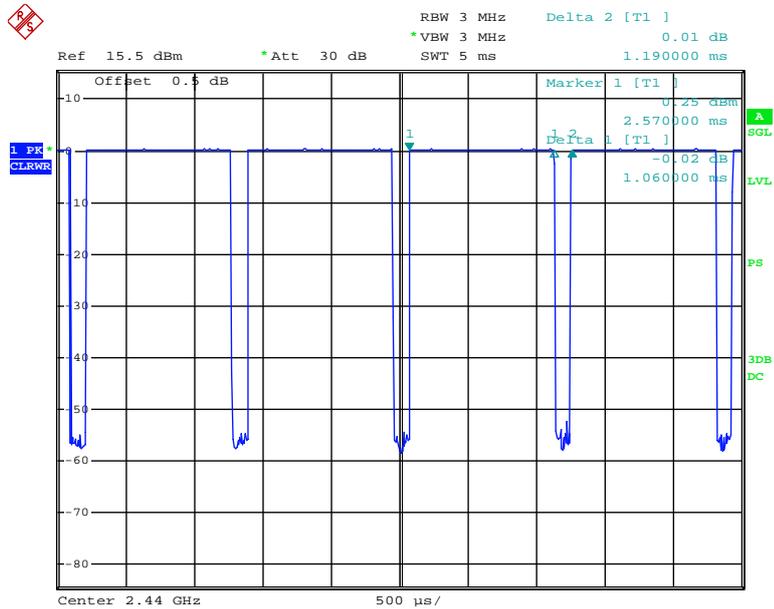

Date: 30.NOV.2018 23:57:32


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
CFOMAX	Adapter	ACC07C02	V043660704256144

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	No	No	0.27	EUT	Adapter

Block Diagram of Test Setup

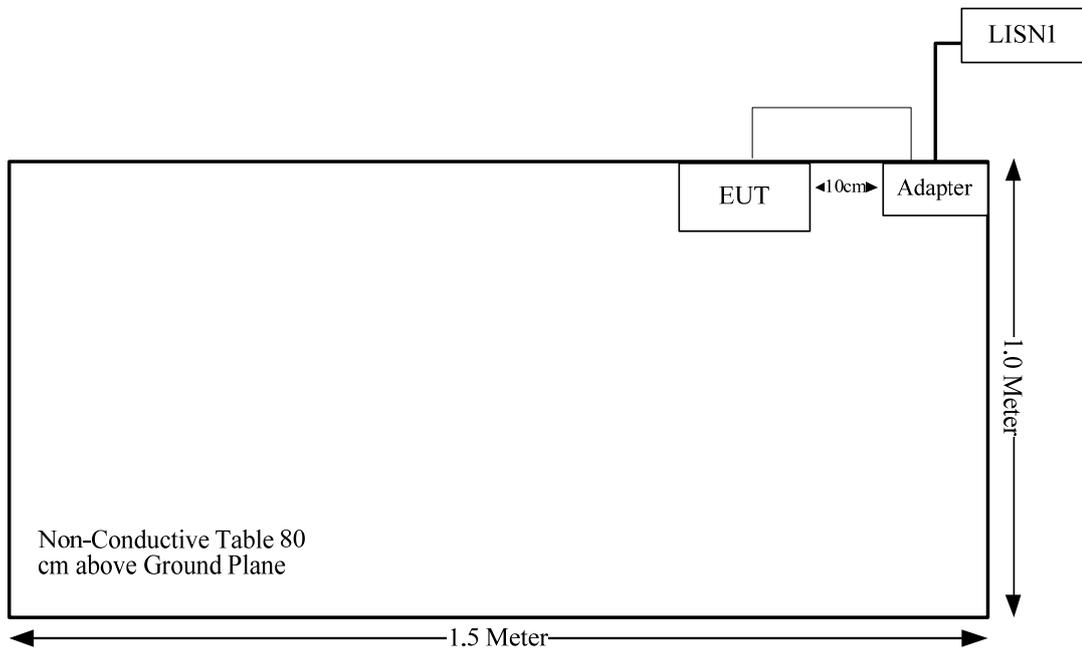

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

When an antenna qualifies for the standalone SAR test exclusion of 4.3.1 and also transmits simultaneously with other antennas, the standalone SAR value must be estimated according to the following to determine the simultaneous transmission SAR test exclusion criteria: $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})/x}]$ W/kg, for test separation distances ≤ 50 mm; where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

Measurement Result

The max conducted power including tune-up tolerance is 1.0dBm (1.26mW).

$[(\text{max. power of channel, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}]$
 $= 1.26/5 \cdot (\sqrt{2.480}) = 0.4 < 3.0$

So the SAR test is not necessary.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Information And Connector Construction

The EUT has one PCB antenna arrangement for BLE, and the antenna gain is -6.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a)– AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a)

EUT Setup

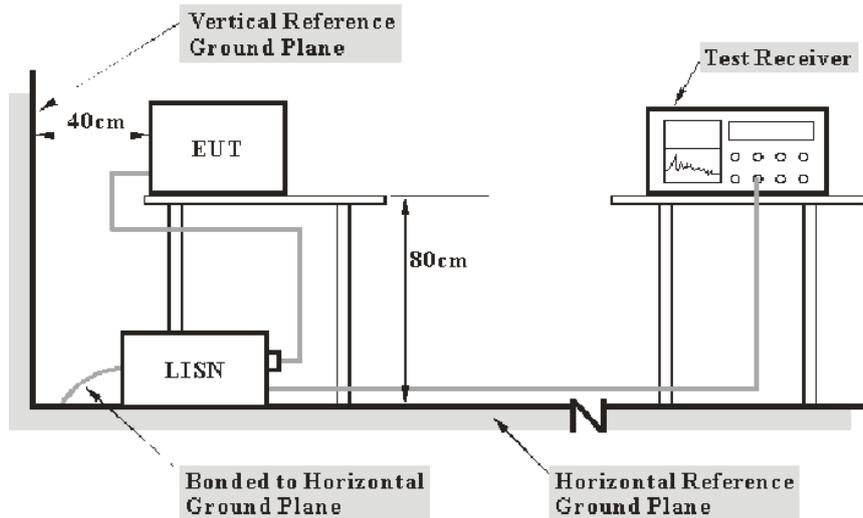

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 30 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisn with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2018-09-05	2019-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2017-12-08	2018-12-08

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	24.3 °C
Relative Humidity:	47 %
ATM Pressure:	100.3 kPa

The testing was performed by Lily Xie on 2018-11-30.

Test Mode: Transmitting


AC120 V, 60 Hz, Line:

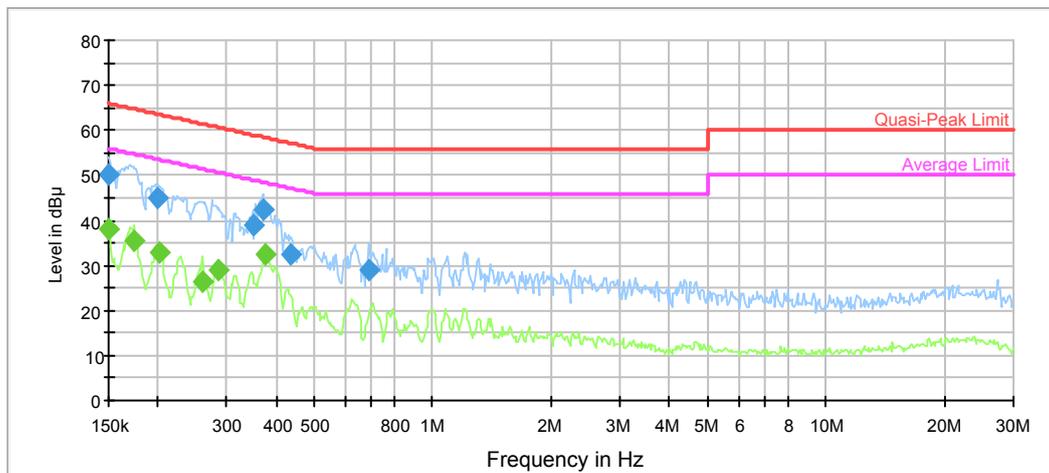

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	50.3	9.000	L1	11.2	15.7	66.0
0.199835	45.1	9.000	L1	10.6	18.5	63.6
0.349066	38.8	9.000	L1	10.0	20.2	59.0
0.369089	42.2	9.000	L1	10.0	16.3	58.5
0.436318	32.3	9.000	L1	9.9	24.8	57.1
0.687153	28.8	9.000	L1	9.8	27.2	56.0

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	38.2	9.000	L1	11.2	17.8	56.0
0.174519	35.4	9.000	L1	10.9	19.3	54.7
0.201433	33.0	9.000	L1	10.6	20.6	53.6
0.259937	26.3	9.000	L1	10.3	25.1	51.4
0.286019	29.2	9.000	L1	10.2	21.4	50.6
0.375019	32.3	9.000	L1	10.0	16.1	48.4

AC120 V, 60 Hz, Neutral:

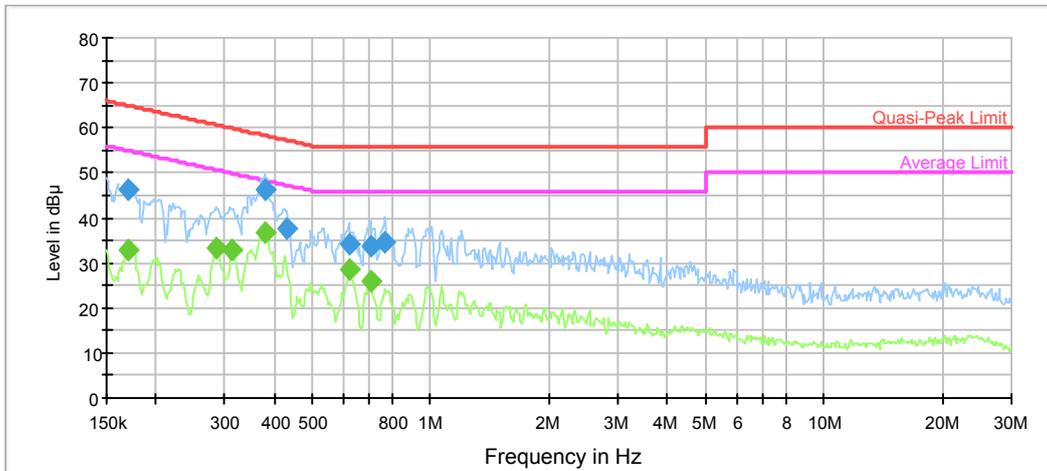

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.170396	46.1	9.000	N	10.9	18.8	64.9
0.378019	46.2	9.000	N	10.0	12.1	58.3
0.432855	37.5	9.000	N	9.9	19.7	57.2
0.619536	34.3	9.000	N	9.8	21.7	56.0
0.703777	33.5	9.000	N	9.8	22.5	56.0
0.768247	34.8	9.000	N	9.8	21.2	56.0

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.170396	32.9	9.000	N	10.9	22.0	54.9
0.286019	33.4	9.000	N	10.2	17.2	50.6
0.312220	32.7	9.000	N	10.1	17.2	49.9
0.378019	36.9	9.000	N	10.0	11.4	48.3
0.624492	28.5	9.000	N	9.8	17.5	46.0
0.703777	25.8	9.000	N	9.8	20.2	46.0


FCC §15.209, §15.205, §15.247(a) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205

EUT Setup

Below 1GHz:

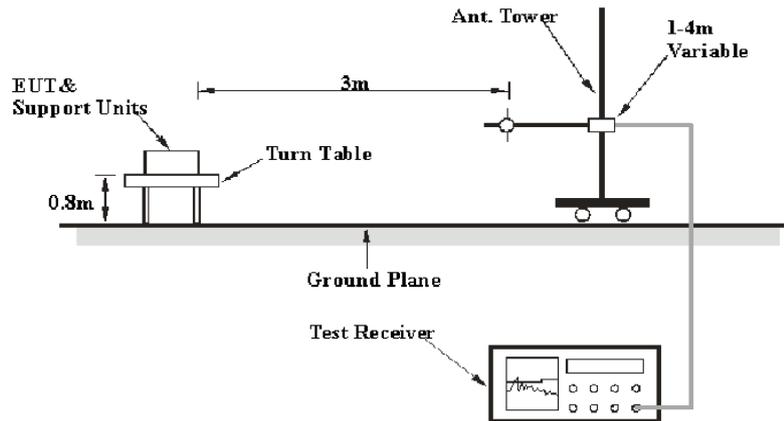

Above 1GHz:

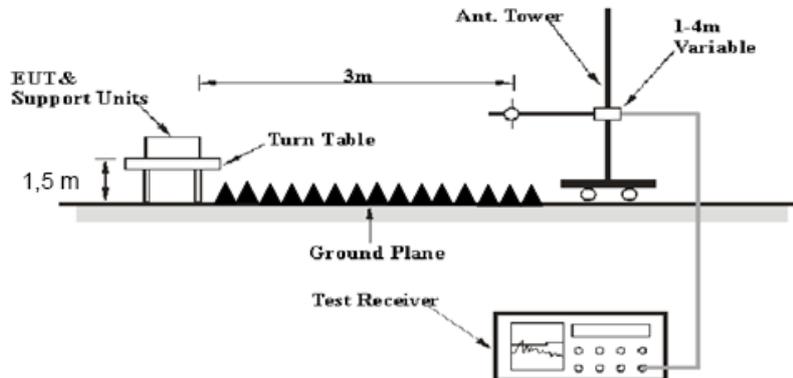

The radiated emission tests were performed in the 10 meters chamber test site for the range 30MHz to 1GHz and the 3 meters chamber B test site for above 1GHz, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

Above 1GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100035	2018-08-03	2019-08-03
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-3	2017-07-21	2019-07-21
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-02	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-2200-01	2018-09-05	2019-09-05
Sonoma	Amplifier	310N	185914	2018-10-13	2019-10-13
R&S	Spectrum Analyzer	FSP 38	100478	2017-12-08	2018-12-08
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
TDK RF	Horn Antenna	HRN-0118	130 084	2016-01-05	2019-01-04
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
MICRO-COAX	Coaxial Cable	UFA147-1-2362- 100100	64639 231029-001	2018-02-24	2019-02-28
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2018-09-05	2019-09-05
Quinstar	Amplifier	QLW-18405536-JO	1596400100 1	2018-06-27	2019-06-27
E-Microwave	Band-stop Filters	OBSF-2400-2483.5-S	OE0160152 5	2018-06-16	2019-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	24.5~25.8°C
Relative Humidity:	39~43 %
ATM Pressure:	100.3~100.5 kPa

* The testing was performed by Neil Liao and Sunny Cen from 2018-11-29 to 2018-11-30.

Test Mode: Transmitting


1) 30MHz-1GHz (BLE 1M mode Low Channel was the worst):

Horizontal:

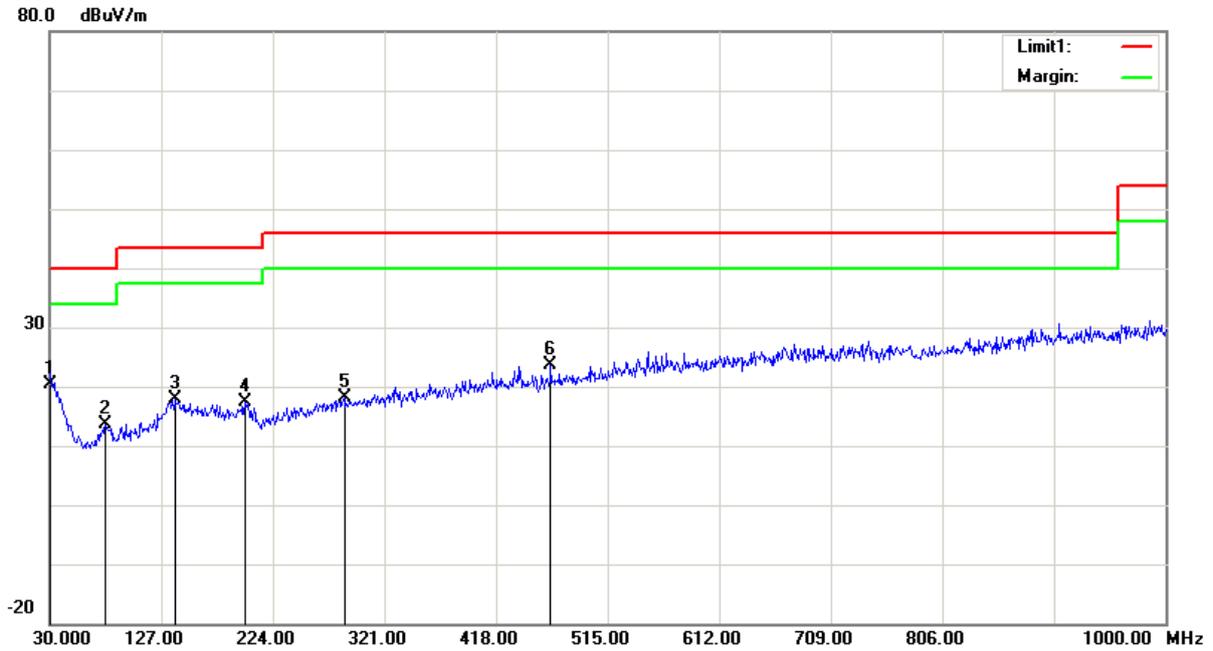

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	24.63	peak	-4.33	20.30	40.00	19.70
78.5000	29.66	peak	-16.11	13.55	40.00	26.45
138.6400	27.49	peak	-9.54	17.95	43.50	25.55
199.7500	26.50	peak	-9.18	17.32	43.50	26.18
286.0800	26.51	peak	-8.30	18.21	46.00	27.79
465.5300	27.65	peak	-3.97	23.68	46.00	22.32

Vertical:

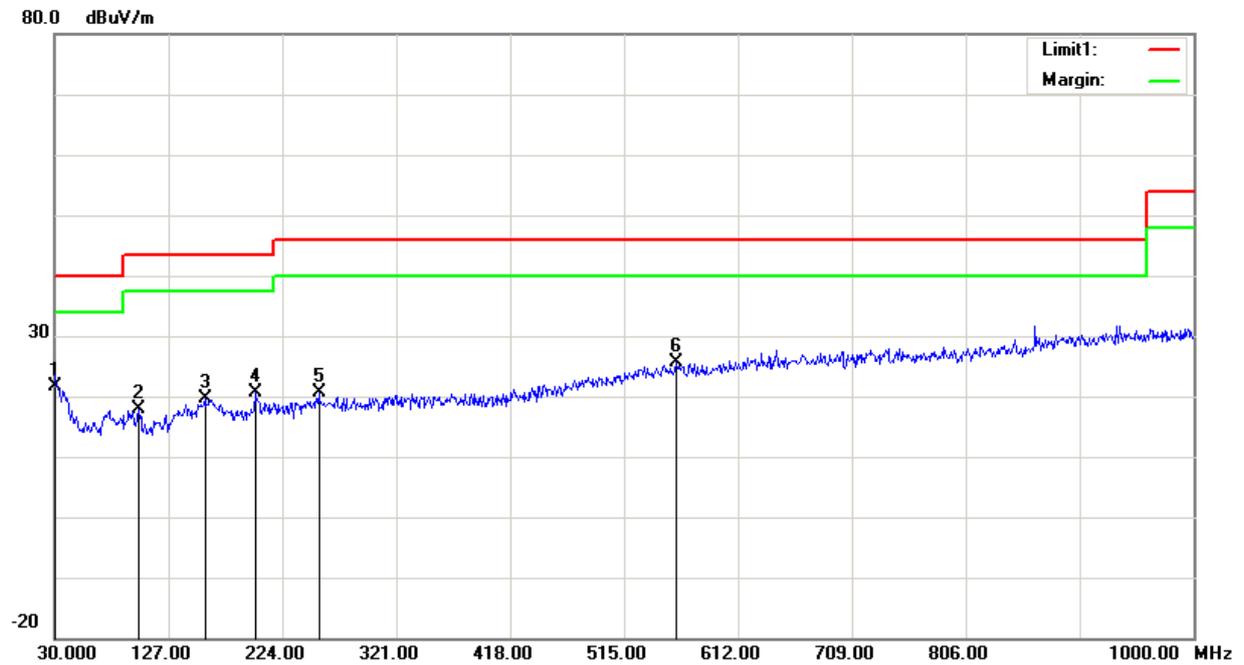

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	25.93	peak	-4.33	21.60	40.00	18.40
101.7800	32.01	peak	-14.07	17.94	43.50	25.56
158.0400	29.13	peak	-9.59	19.54	43.50	23.96
200.7200	29.99	peak	-9.27	20.72	43.50	22.78
255.0400	30.13	peak	-9.60	20.53	46.00	25.47
559.6200	27.05	peak	-1.52	25.53	46.00	20.47

Note: The peak value meets QP limits, so no need record QP value.

2) 1-25 GHz:**BLE 1M:**




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	56.24	PK	H	24.82	3.34	0.00	84.40	N/A	N/A
2402.00	55.41	AV	H	24.82	3.34	0.00	83.57	N/A	N/A
2402.00	61.07	PK	V	24.82	3.34	0.00	89.23	N/A	N/A
2402.00	60.00	AV	V	24.82	3.34	0.00	88.16	N/A	N/A
2390.00	23.56	PK	V	24.80	3.33	0.00	51.69	74.00	22.31
2390.00	11.85	AV	V	24.80	3.33	0.00	39.98	54.00	14.02
4804.00	42.86	PK	V	29.71	4.58	27.36	49.79	74.00	24.21
4804.00	36.81	AV	V	29.71	4.58	27.36	43.74	54.00	10.26
7206.00	40.03	PK	V	33.93	5.59	27.19	52.36	74.00	21.64
7206.00	26.72	AV	V	33.93	5.59	27.19	39.05	54.00	14.95
Middle Channel: 2440 MHz									
2440.00	52.16	PK	H	24.89	3.36	0.00	80.41	N/A	N/A
2440.00	50.98	AV	H	24.89	3.36	0.00	79.23	N/A	N/A
2440.00	58.14	PK	V	24.89	3.36	0.00	86.39	N/A	N/A
2440.00	56.21	AV	V	24.89	3.36	0.00	84.46	N/A	N/A
4880.00	40.58	PK	V	29.86	4.56	27.55	47.45	74.00	26.55
4880.00	34.23	AV	V	29.86	4.56	27.55	41.10	54.00	12.90
7320.00	39.45	PK	V	34.11	5.69	27.26	51.99	74.00	22.01
7320.00	26.31	AV	V	34.11	5.69	27.26	38.85	54.00	15.15
High Channel: 2480 MHz									
2480.00	49.75	PK	H	24.96	3.38	0.00	78.09	N/A	N/A
2480.00	48.61	AV	H	24.96	3.38	0.00	76.95	N/A	N/A
2480.00	55.32	PK	V	24.96	3.38	0.00	83.66	N/A	N/A
2480.00	54.34	AV	V	24.96	3.38	0.00	82.68	N/A	N/A
2483.50	24.67	PK	V	24.97	3.38	0.00	53.02	74.00	20.98
2483.50	14.85	AV	V	24.97	3.38	0.00	43.20	54.00	10.80
4960.00	40.18	PK	V	30.02	4.58	27.37	47.41	74.00	26.59
4960.00	31.73	AV	V	30.02	4.58	27.37	38.96	54.00	15.04
7440.00	40.18	PK	V	34.30	5.79	27.22	53.05	74.00	20.95
7440.00	27.52	AV	V	34.30	5.79	27.22	40.39	54.00	13.61

BLE 2M:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	56.83	PK	H	24.82	3.34	0.00	84.99	N/A	N/A
2402.00	54.31	AV	H	24.82	3.34	0.00	82.47	N/A	N/A
2402.00	62.19	PK	V	24.82	3.34	0.00	90.35	N/A	N/A
2402.00	60.11	AV	V	24.82	3.34	0.00	88.27	N/A	N/A
2390.00	23.99	PK	V	24.80	3.33	0.00	52.12	74.00	21.88
2390.00	11.87	AV	V	24.80	3.33	0.00	40.00	54.00	14.00
4804.00	41.42	PK	V	29.71	4.58	27.36	48.35	74.00	25.65
4804.00	33.18	AV	V	29.71	4.58	27.36	40.11	54.00	13.89
7206.00	39.48	PK	V	33.93	5.59	27.19	51.81	74.00	22.19
7206.00	26.78	AV	V	33.93	5.59	27.19	39.11	54.00	14.89
Middle Channel: 2440 MHz									
2440.00	52.43	PK	H	24.89	3.36	0.00	80.68	N/A	N/A
2440.00	51.17	AV	H	24.89	3.36	0.00	79.42	N/A	N/A
2440.00	58.38	PK	V	24.89	3.36	0.00	86.63	N/A	N/A
2440.00	56.91	AV	V	24.89	3.36	0.00	85.16	N/A	N/A
4880.00	40.38	PK	V	29.86	4.56	27.55	47.25	74.00	26.75
4880.00	31.03	AV	V	29.86	4.56	27.55	37.90	54.00	16.10
7320.00	39.61	PK	V	34.11	5.69	27.26	52.15	74.00	21.85
7320.00	26.44	AV	V	34.11	5.69	27.26	38.98	54.00	15.02
High Channel: 2480 MHz									
2480.00	49.86	PK	H	24.96	3.38	0.00	78.20	N/A	N/A
2480.00	48.17	AV	H	24.96	3.38	0.00	76.51	N/A	N/A
2480.00	56.83	PK	V	24.96	3.38	0.00	85.17	N/A	N/A
2480.00	55.02	AV	V	24.96	3.38	0.00	83.36	N/A	N/A
2483.50	25.89	PK	V	24.97	3.38	0.00	54.24	74.00	19.76
2483.50	16.40	AV	V	24.97	3.38	0.00	44.75	54.00	9.25
4960.00	40.17	PK	V	30.02	4.58	27.37	47.40	74.00	26.60
4960.00	31.93	AV	V	30.02	4.58	27.37	39.16	54.00	14.84
7440.00	40.10	PK	V	34.30	5.79	27.22	52.97	74.00	21.03
7440.00	26.94	AV	V	34.30	5.79	27.22	39.81	54.00	14.19




Worst plots (BLE 1M Low Channel) Horizontal

Fundamental
Test with Band
Rejection Filter

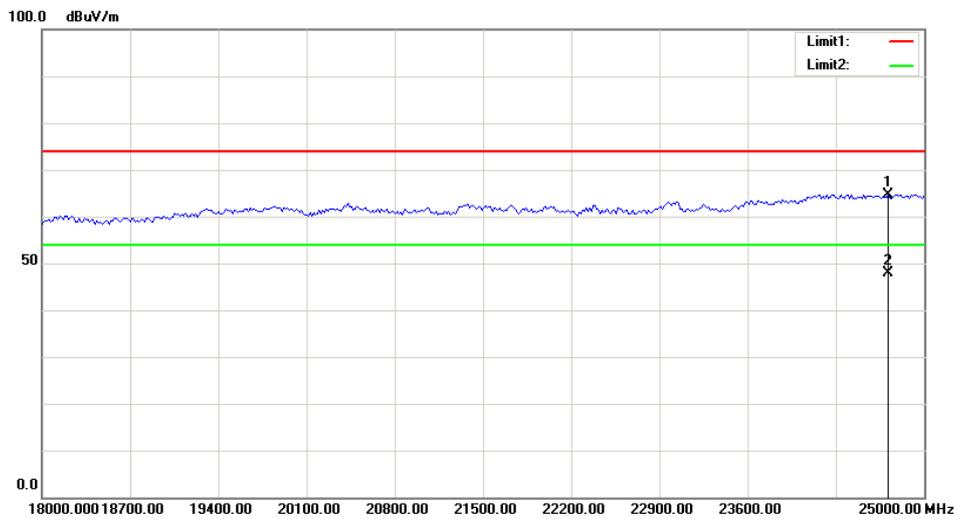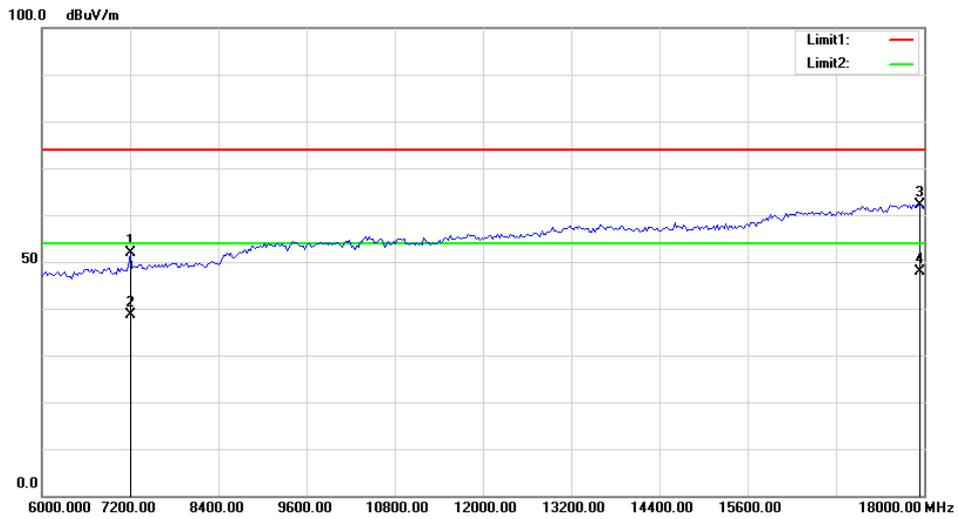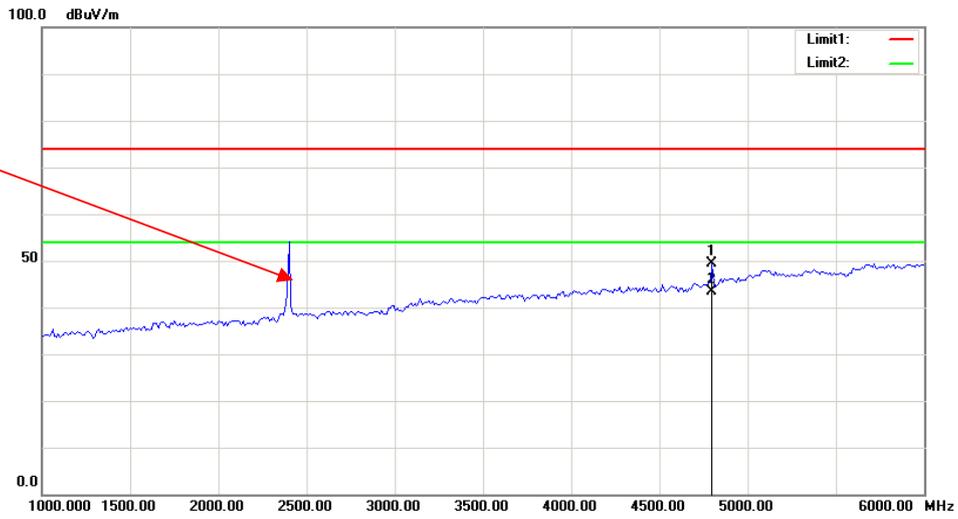

Vertical

Fundamental Test with Band Rejection Filter

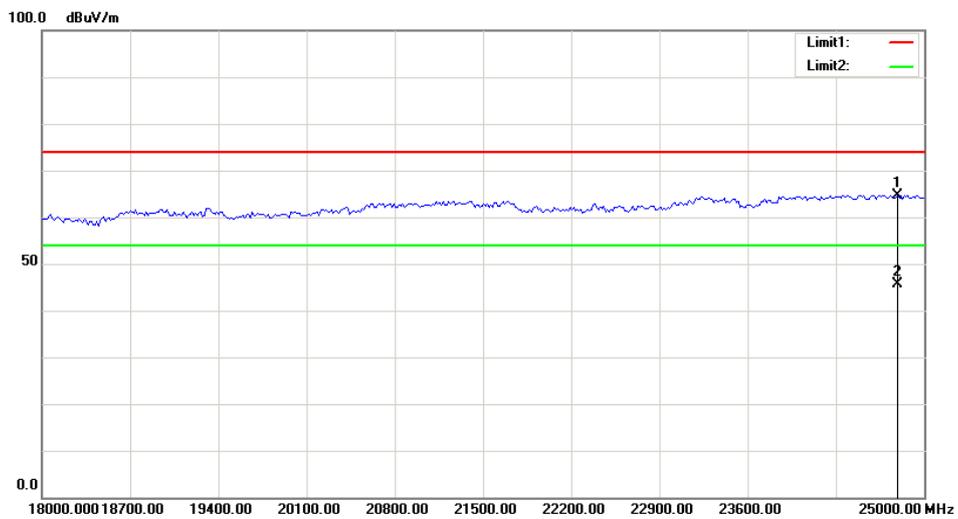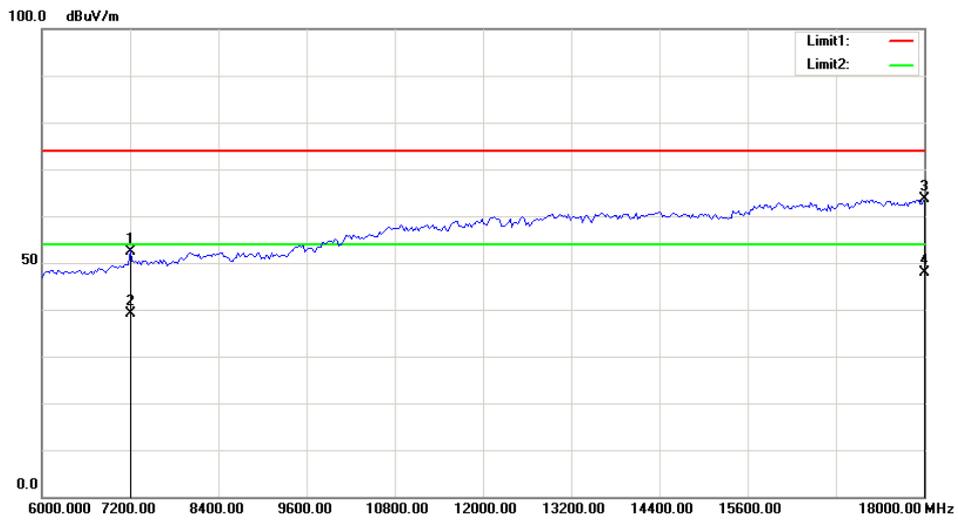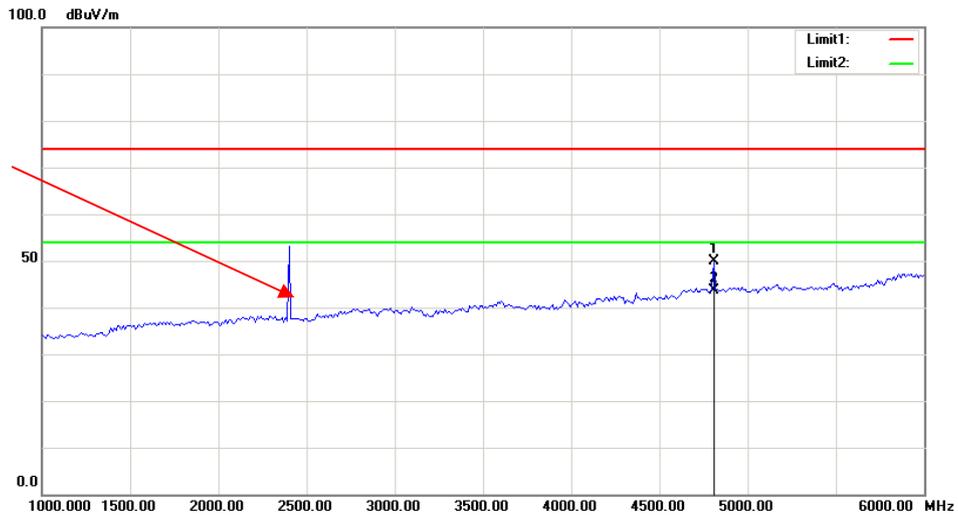

FCC §15.247(a) (2) –6 dB EMISSION BANDWIDTH


Applicable Standard

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

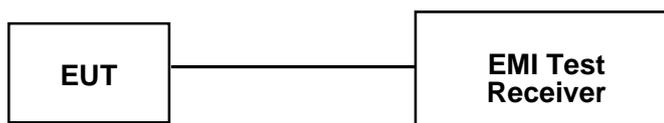

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	101121	2018-03-23	2019-03-23
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Blocking Control	EMDCB-00036	0E01201047	2018-05-06	2019-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.6~26.5 °C
Relative Humidity:	50 %
ATM Pressure:	100.2~100.5 kPa

* The testing was performed by Andy Huang from 2018-11-30 to 2018-12-04.

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots.

BLE 1M:


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
Low	2402	0.512	≥0.5
Middle	2440	0.504	≥0.5
High	2480	0.512	≥0.5

BLE 2M:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
Low	2402	0.848	≥0.5
Middle	2440	0.864	≥0.5
High	2480	0.828	≥0.5


BLE 1M:

Low Channel

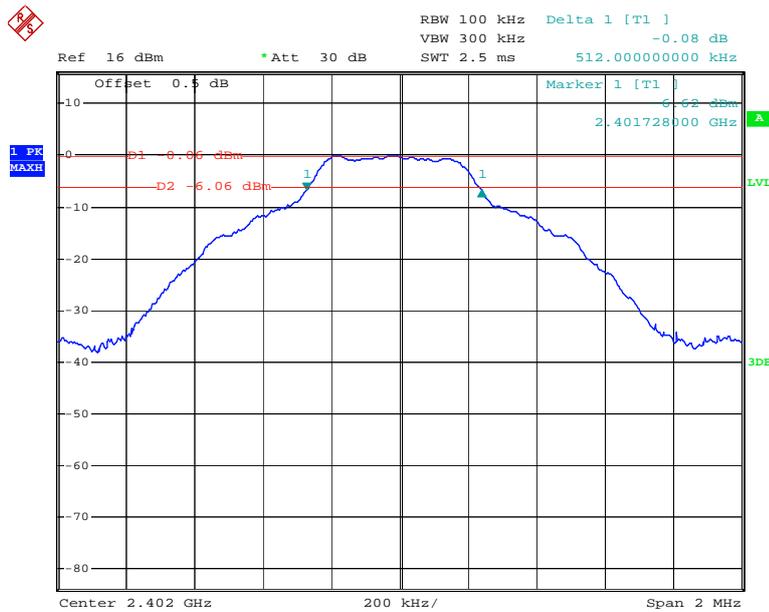


Date: 4.DEC.2018 12:15:10

Middle Channel

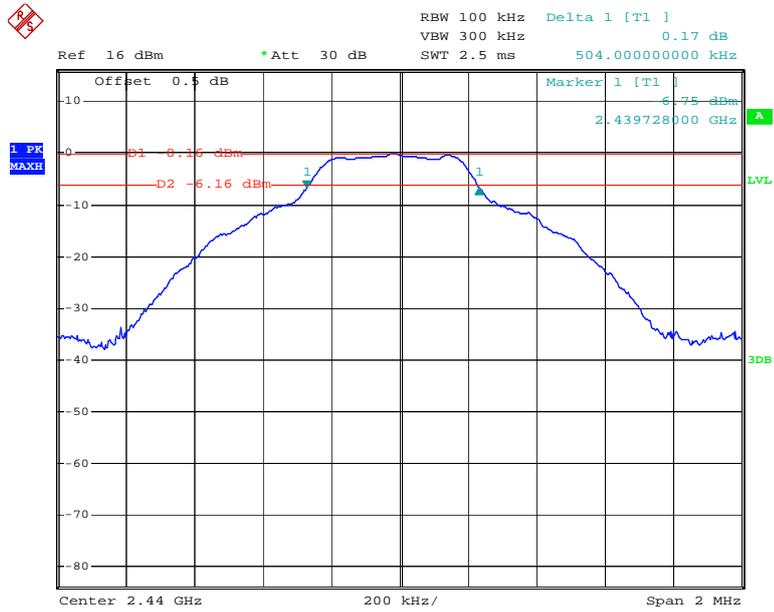

Date: 4.DEC.2018 12:17:04


High Channel

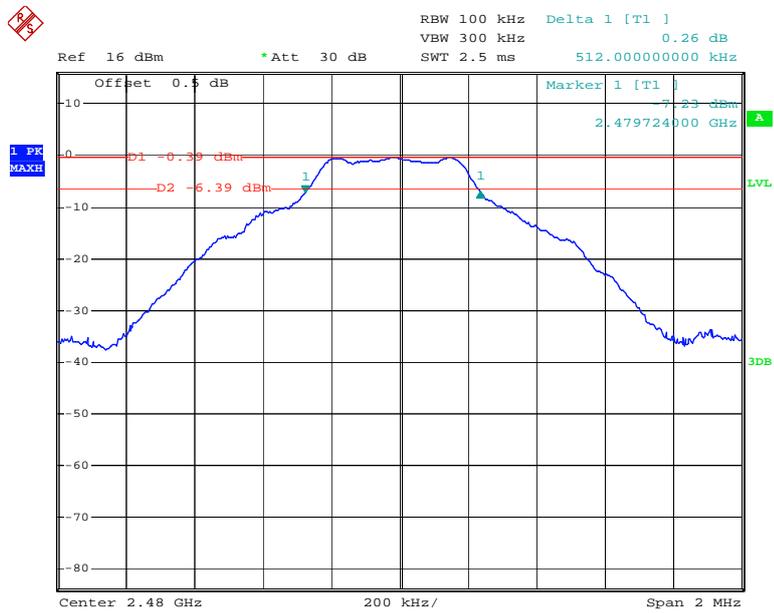

Date: 4.DEC.2018 12:18:40


BLE 2M:

Low Channel

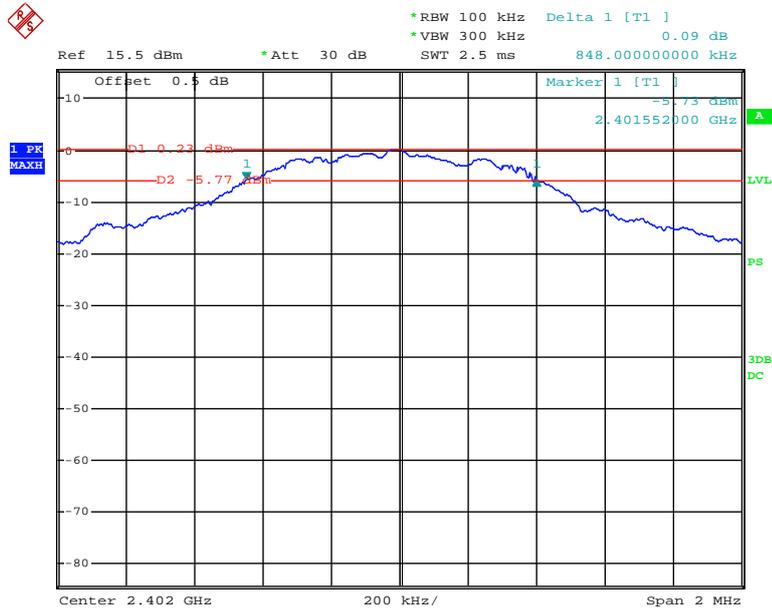


Date: 30.NOV.2018 23:59:24

Middle Channel

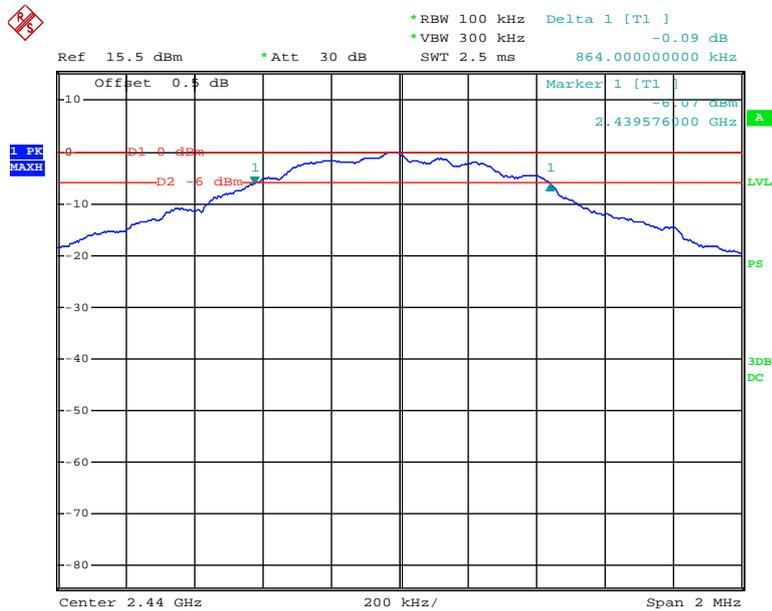

Date: 30.NOV.2018 23:54:29

High Channel

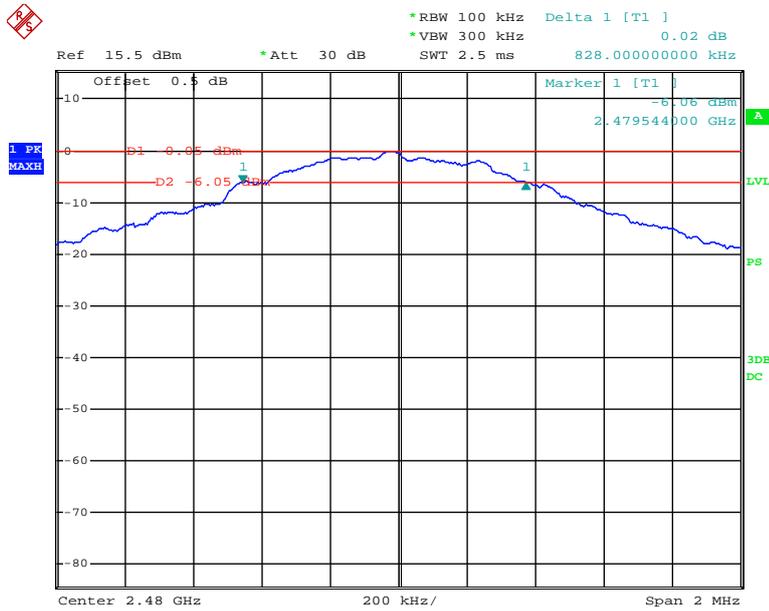

Date: 1.DEC.2018 00:04:04

FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.
4. Set the power Meter to test Peak output power, record the result as peak power.
5. Set the power meter to test average output power, record the result as average power.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	101121	2018-03-23	2019-03-23
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Blocking Control	EMDCB-00036	0E01201047	2018-05-06	2019-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.6 °C
Relative Humidity:	50 %
ATM Pressure:	100.2 kPa

* The testing was performed by Andy Huang on 2018-11-30 and 2018-12-01.

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table.

BLE 1M:


Channel	Frequency (MHz)	Max Peak Conducted Output Power (dBm)	Limit (dBm)
Low	2402	0.50	30
Middle	2440	0.28	30
High	2480	0.16	30

BLE 2M:

Channel	Frequency (MHz)	Max Peak Conducted Output Power (dBm)	Limit (dBm)
Low	2402	0.62	30
Middle	2440	0.35	30
High	2480	0.19	30


BLE 1M:

Low Channel

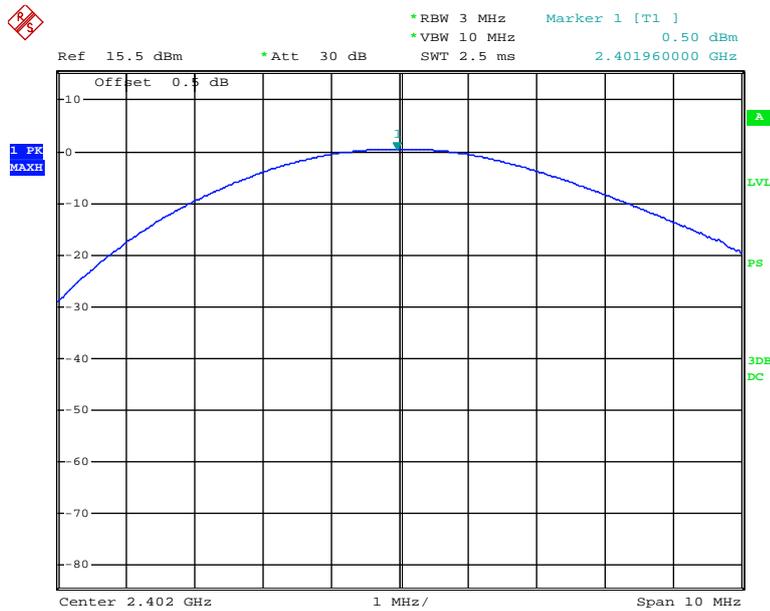


Date: 1.DEC.2018 00:15:28

Middle Channel

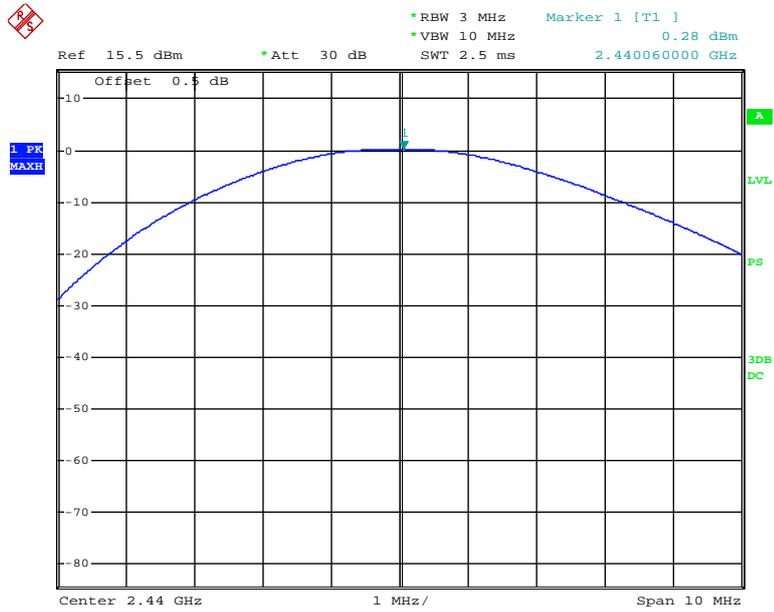

Date: 1.DEC.2018 00:20:50


High Channel

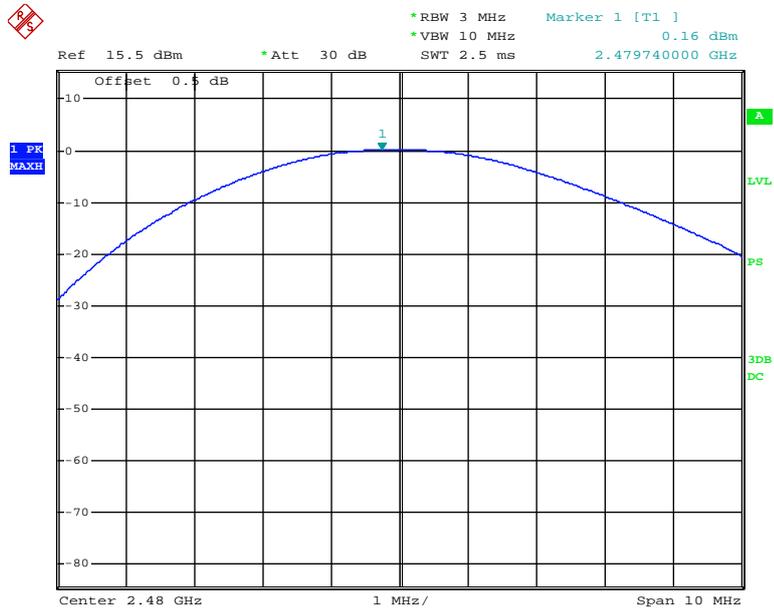

Date: 1.DEC.2018 00:18:00


BLE 2M:

Low Channel

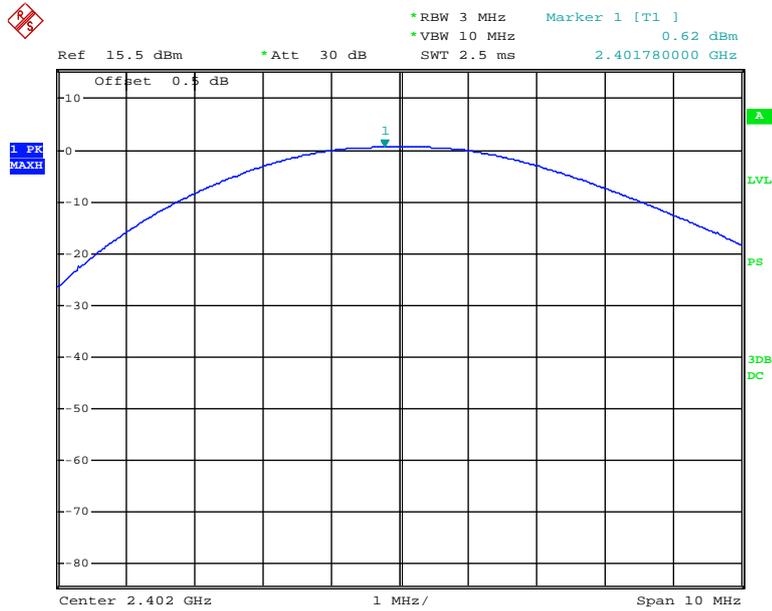


Date: 1,DEC.2018 00:00:02

Middle Channel

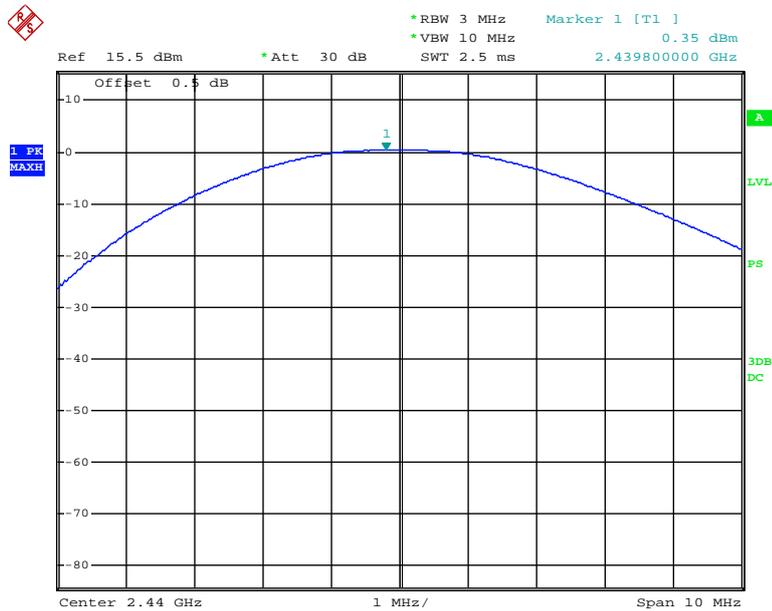

Date: 30.NOV.2018 23:54:58

High Channel

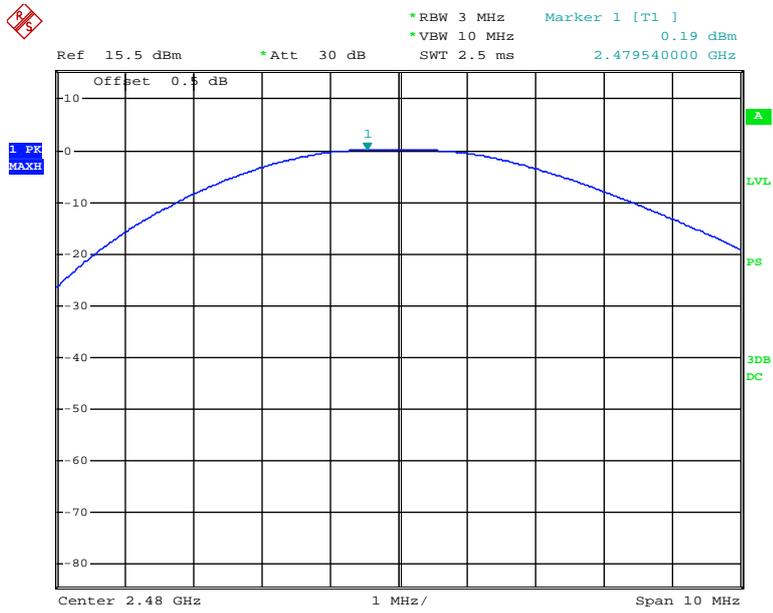

Date: 1.DEC.2018 00:04:32

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

According to FCC§15.247(d):In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	101121	2018-03-23	2019-03-23
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Blocking Control	EMDCB-00036	0E01201047	2018-05-06	2019-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	25.6 °C
Relative Humidity:	50 %
ATM Pressure:	100.2 kPa

* *The testing was performed by Andy Huang on 2018-12-01.*


Test mode: Transmitting
 Test Result: Compliance. Please refer to following plots.

BLE 1M-Band Edge, Left Side

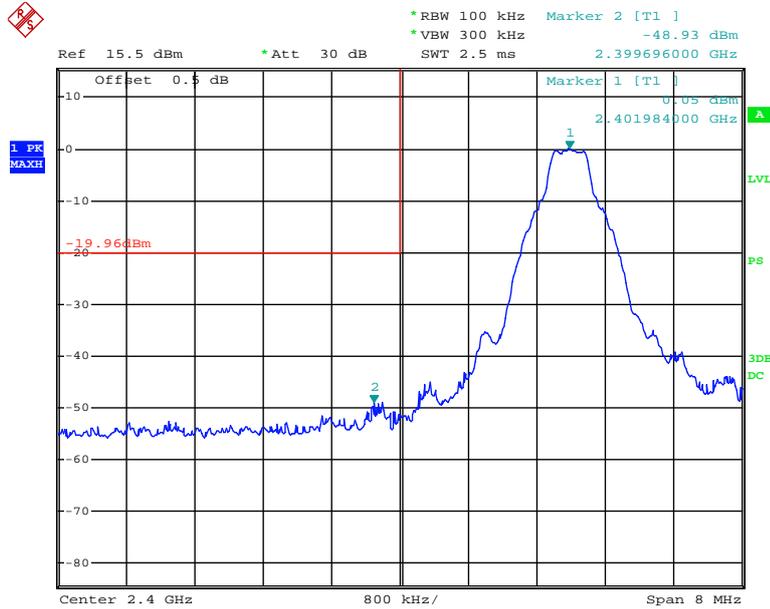


Date: 1.DEC.2018 00:16:18

BLE 1M-Band Edge, Right Side

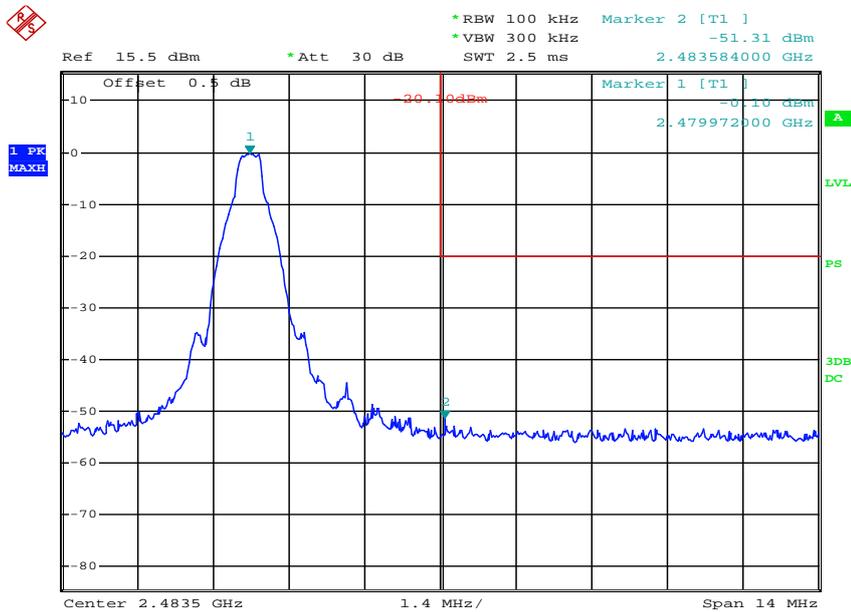


Date: 1.DEC.2018 00:18:44

BLE 2M-Band Edge, Left Side

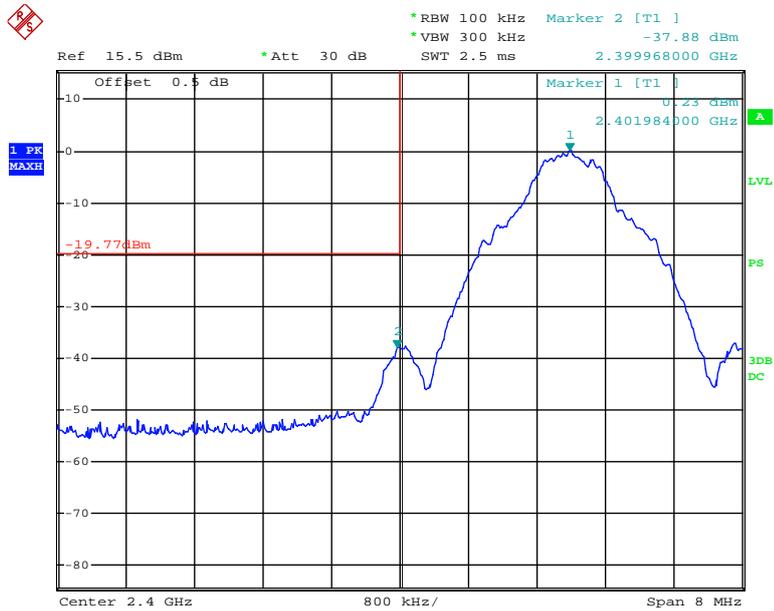

Date: 1.DEC.2018 00:00:39

BLE 2M-Band Edge, Right Side

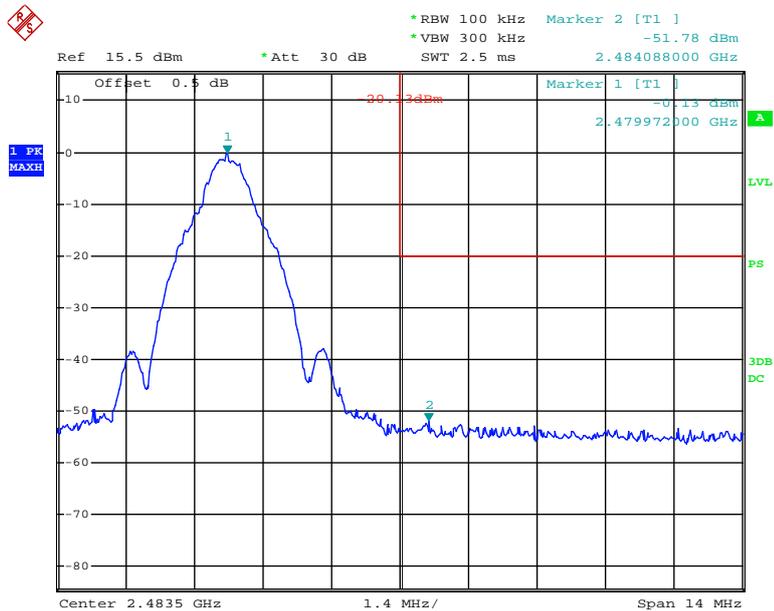

Date: 1.DEC.2018 00:05:08

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

According to FCC§15.247(e):For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
4. Use the peak marker function to determine the maximum amplitude level.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	101121	2018-03-23	2019-03-23
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Blocking Control	EMDCB-00036	0E01201047	2018-05-06	2019-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.6 °C
Relative Humidity:	50%
ATM Pressure:	100.2 kPa

* The testing was performed by Andy Huang on 2018-11-30 and 2018-12-01.

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots

BLE 1M:


Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
Low	2402	-10.70	≤8
Middle	2440	-11.18	≤8
High	2480	-10.02	≤8

BLE 2M:

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
Low	2402	-13.88	≤8
Middle	2440	-13.90	≤8
High	2480	-10.98	≤8


BLE 1M:

Power Spectral Density, Low Channel

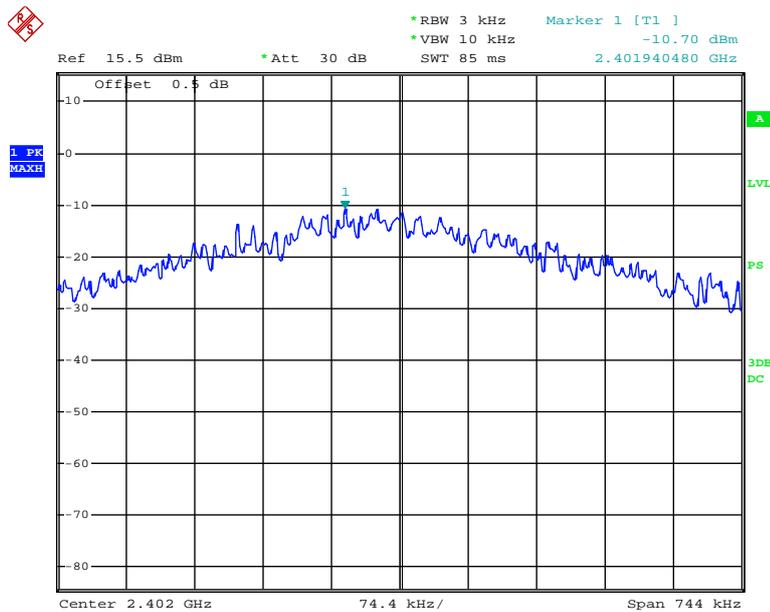


Date: 1.DEC.2018 00:15:43

Power Spectral Density, Middle Channel

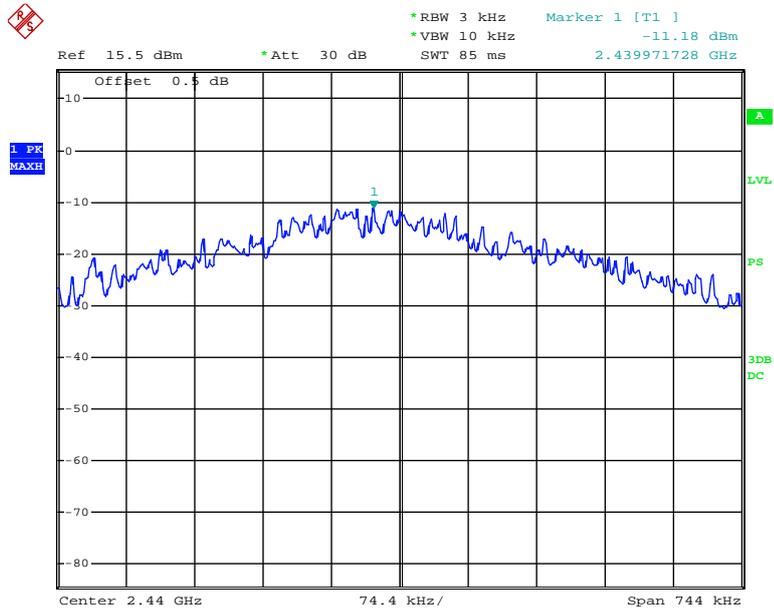

Date: 1.DEC.2018 00:21:03


Power Spectral Density, High Channel

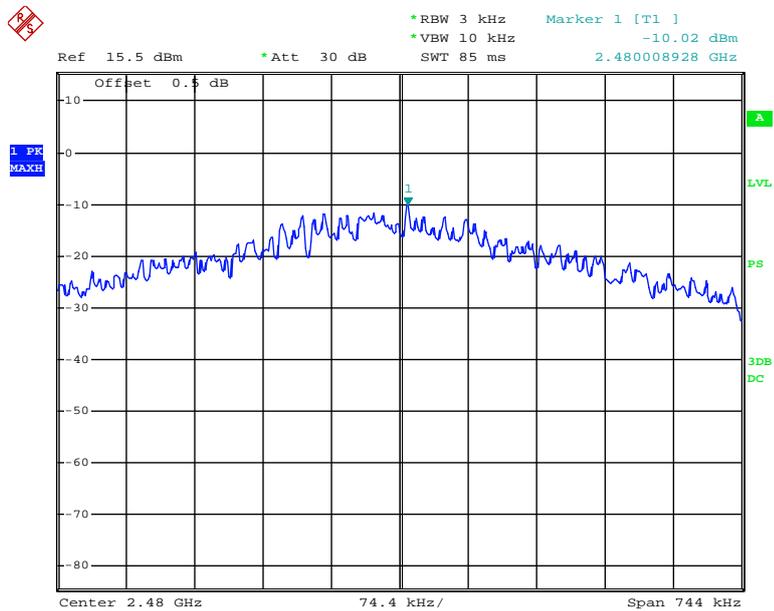

Date: 1.DEC.2018 00:18:16


BLE 2M:

Power Spectral Density, Low Channel

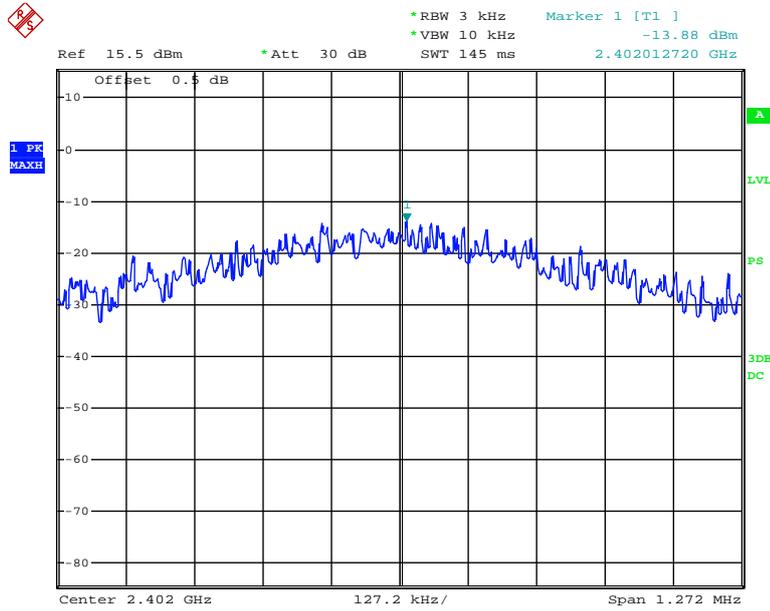


Date: 1.DEC.2018 00:00:13

Power Spectral Density, Middle Channel

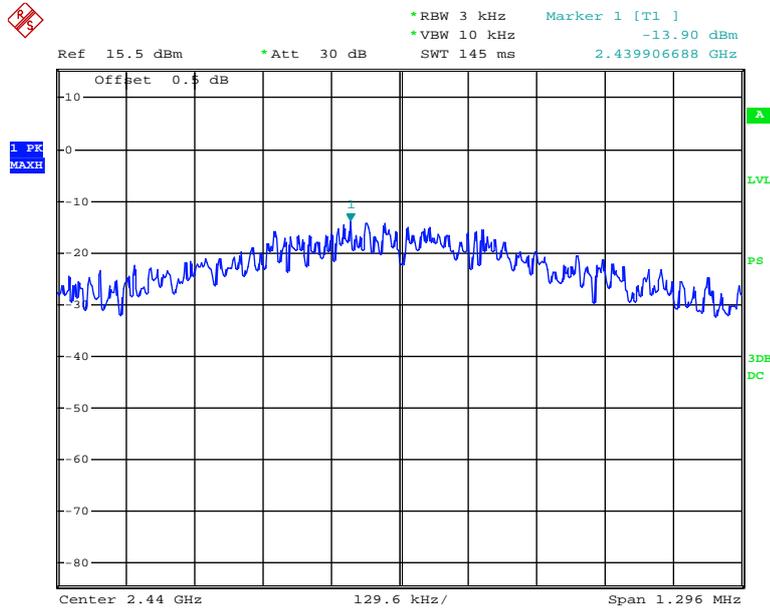

Date: 30.NOV.2018 23:55:14

Power Spectral Density, High Channel

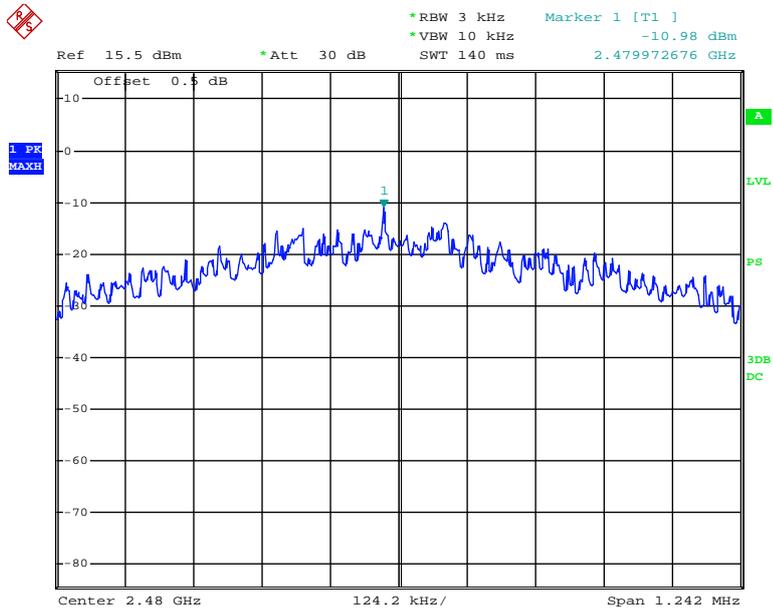

Date: 1.DEC.2018 00:04:48

***** END OF REPORT *****