


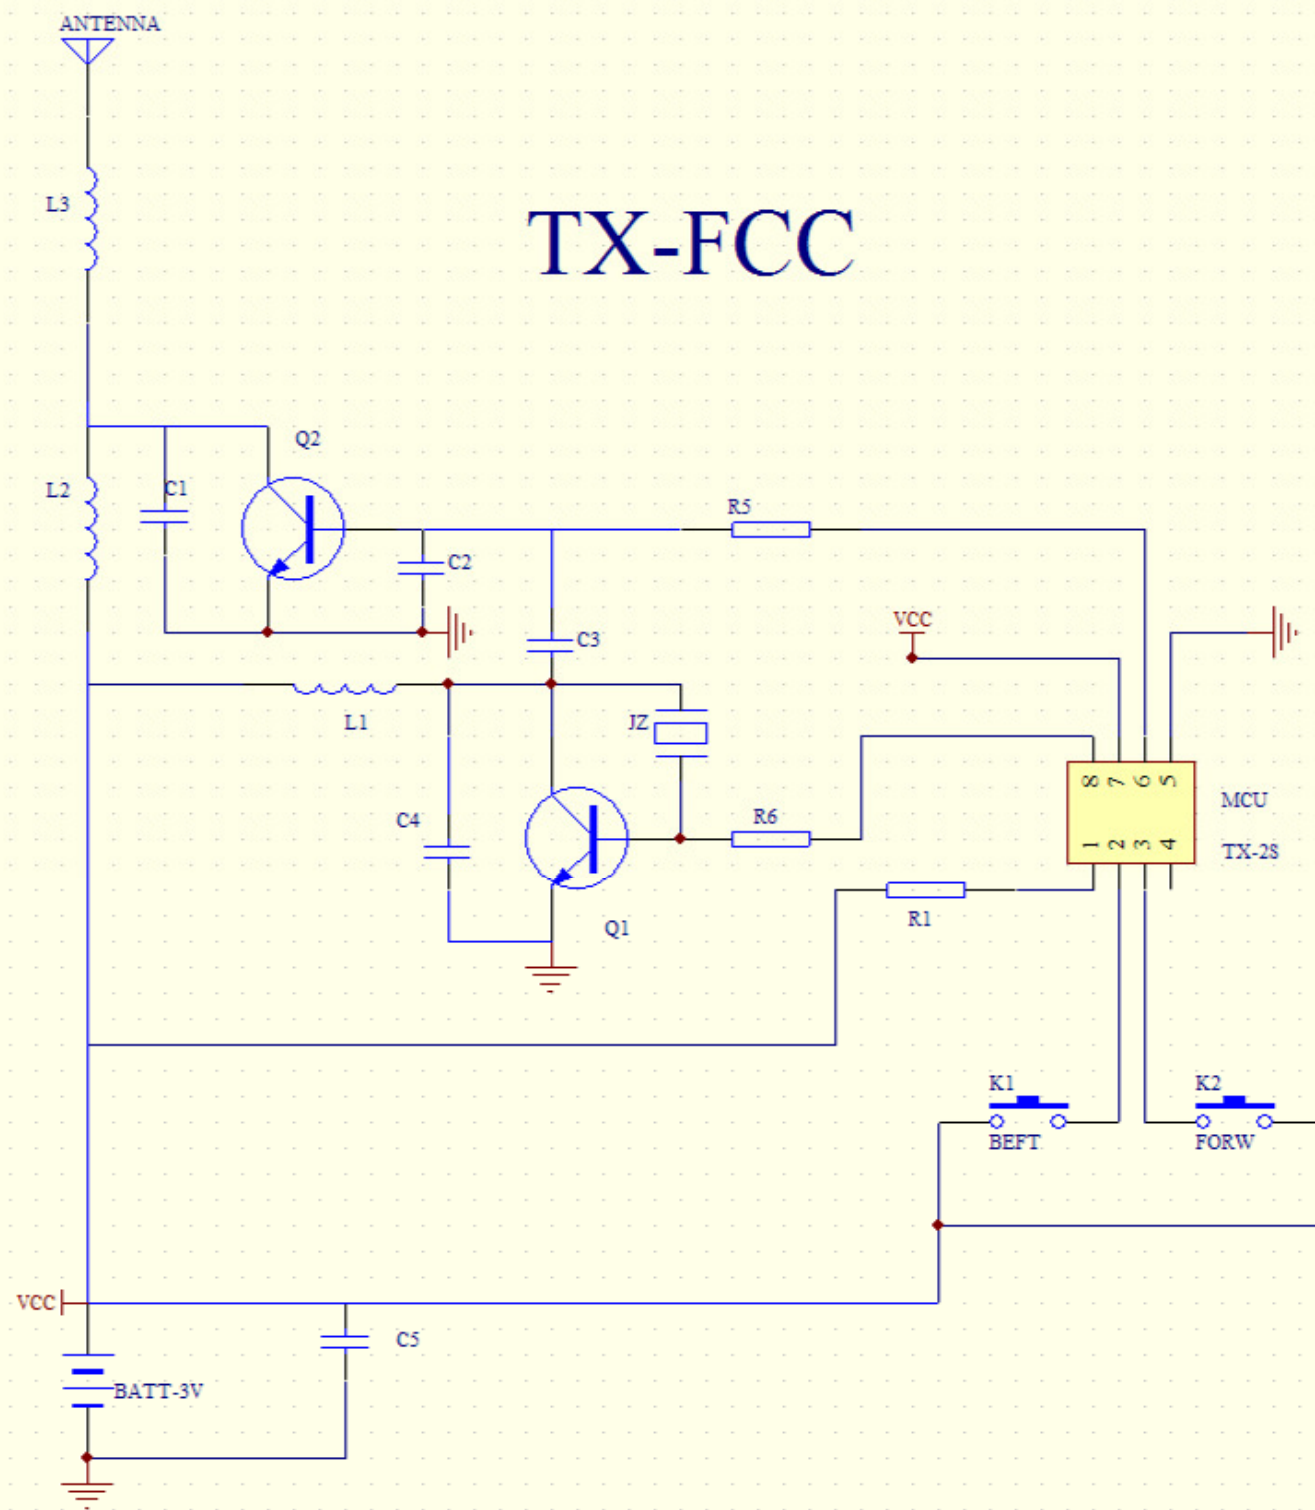

technology	Material	Model specification	position	consumption
Patch	CC	C-0603-15P $\pm$ 5%-T	C3	1
		C-0603-18P $\pm$ 5%-T	C1	1
		C-0603-471P $\pm$ 5%-T	C2	1
		C-0603-104+80%-20%-T	C5	1
	Integrated	U-TX-2S-SOP8-T	MCU	1
	inductance	L-0805-5R6 $\pm$ 10%-T	L2	1
		L-0805-2R2 $\pm$ 10%-T	L1	1
	triode	Q-C945-SOT-23A(CR)-T	Q1	1
		Q-8050-SOT-23A(J3Y)-T	Q2	1
	resistance	R-0603-270K-T	R1	1
		R-0603-10K-T	R5	1
		R-0603-47K-T	R6	1
plug-in unit	inductance	L-0410-【2R2】 $\pm$ 5%	L3	1
	switch	The touch switch 6*6*4.3	K1.K2	2
	Positive	12-0.1-40MM	VCC	1
	Negative	12-0.1-40MM	GND	1
	Crystal	R49.865M	JZ	1
board	plate	58MM*17MM*1.4MM		1