



TESTING LABORATORY  
CERTIFICATE#4323.01



## FCC PART 15.247 TEST REPORT

For

**Fengfan (Suzhou) Audio Technology Co. Ltd**

E1-101, No.88 Dongchang Rd (i-Park), SIP Suzhou, Jiangsu Province, China (PRC)

**FCC ID: 2AHGU-F022**

<b>Report Type:</b> Original Report	<b>Product Type:</b> FIIL T1 X
<b>Test Engineer:</b> <u>Winnie Yang</u>	
<b>Report Number:</b> <u>RSHF190828002-00B</u>	
<b>Report Date:</b> <u>2019-10-12</u>	
<b>Reviewed By:</b> <u>Oscar Ye</u> <u>RF Leader</u>	<u>Oscar.Ye</u>
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliant Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY.....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EUT EXERCISE SOFTWARE .....	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS .....	6
SUPPORT EQUIPMENT LIST AND DETAILS .....	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP .....	7
<b>SUMMARY OF TEST RESULTS.....</b>	<b>9</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>10</b>
<b>FCC §15.247 (I) &amp; §1.1310 &amp; §2.1093 - RF EXPOSURE .....</b>	<b>11</b>
MEASUREMENT RESULT .....	11
<b>FCC §15.203 – ANTENNA REQUIREMENT.....</b>	<b>12</b>
APPLICABLE STANDARD .....	12
ANTENNA CONNECTOR CONSTRUCTION .....	12
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>13</b>
APPLICABLE STANDARD .....	13
EUT SETUP .....	13
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE .....	13
CORRECTED FACTOR & OVER LIMIT CALCULATION.....	14
TEST RESULTS SUMMARY .....	14
TEST DATA .....	14
<b>FCC §15.205, §15.209 &amp; §15.247(d) – RADIATED EMISSIONS.....</b>	<b>17</b>
APPLICABLE STANDARD .....	17
EUT SETUP .....	17
EMI TEST RECEIVER SETUP.....	18
TEST PROCEDURE .....	18
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	18
TEST RESULTS SUMMARY .....	18
TEST DATA .....	19
<b>FCC §15.247(a) (1)-CHANNEL SEPARATION TEST .....</b>	<b>35</b>
APPLICABLE STANDARD .....	35
TEST PROCEDURE .....	35
TEST DATA .....	35
<b>FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....</b>	<b>41</b>
APPLICABLE STANDARD .....	41
TEST PROCEDURE .....	41
TEST DATA .....	41

<b>FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST .....</b>	<b>47</b>
APPLICABLE STANDARD .....	47
TEST PROCEDURE .....	47
TEST DATA .....	47
<b>FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....</b>	<b>50</b>
APPLICABLE STANDARD .....	50
TEST PROCEDURE .....	50
TEST DATA .....	50
<b>FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT.....</b>	<b>66</b>
APPLICABLE STANDARD .....	66
TEST PROCEDURE .....	66
TEST DATA .....	66
<b>FCC §15.247(d) - BAND EDGES TESTING .....</b>	<b>73</b>
APPLICABLE STANDARD .....	73
TEST PROCEDURE .....	73
TEST DATA .....	73

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Applicant	Fengfan (Suzhou) Audio Technology Co. Ltd
Tested Model	F022
Product Type	FIIL T1 X
Dimension	25.6mm(L)* 24.7mm(W)*16mm(H)
Power Supply	DC 5V by charging case and DC 3.7V from battery

*NOTE: Earbuds(L) was test all items. Earbuds(R) was only test the Radiated Emissions .*

*\*All measurement and test data in this report was gathered from production sample serial number: 20190828002.  
(Assigned by the BACL. The EUT supplied by the applicant was received on 2019-08-28)*

### Objective

This test report is prepared on behalf of *Fengfan (Suzhou) Audio Technology Co. Ltd* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine Compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

No related submittal(s).

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## Measurement Uncertainty

Item	Uncertainty	
AC Power Lines Conducted Emissions	3.19dB	
RF conducted test with spectrum	0.9dB	
RF Output Power with Power meter	0.5dB	
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth	0.5kHz	
Temperature	1.0°C	
Humidity	6%	

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01), the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

Channel list for Bluetooth:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	...	...
...	...	...	...
...	...	78	2480
39	2441	/	/

EUT was tested with Channel 0, 39 and 78.

### EUT Exercise Software

RF test software: AB153x\_Airoha\_Tool kit(ATK)\_V2.2.3.

GFSK,  $\pi/4$ -DQPSK, 8DPSK Power Setting: Default.

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

## Support Equipment List and Details

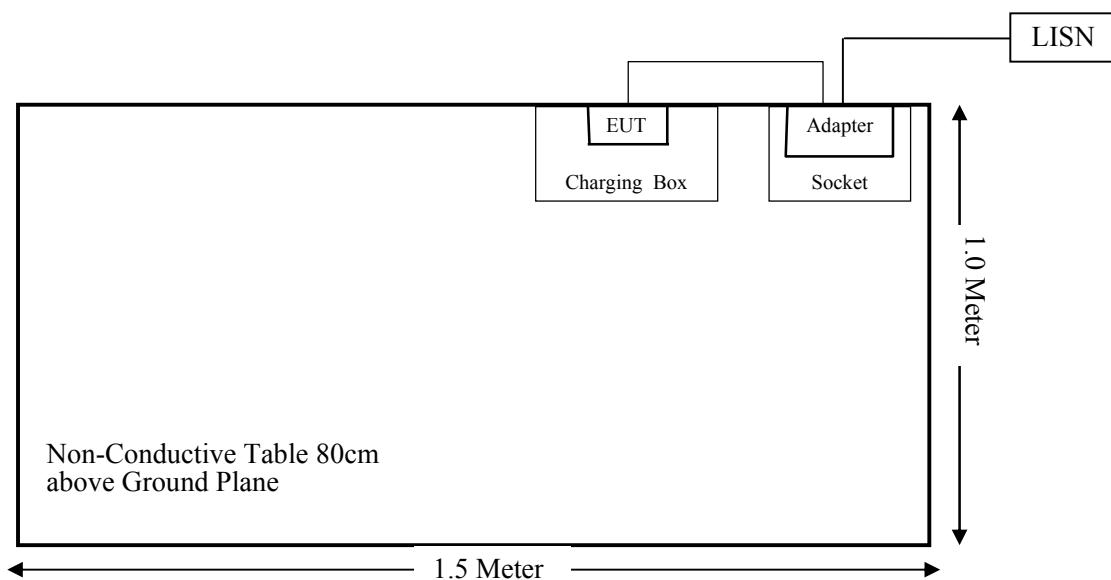
Manufacturer	Description	Model	Serial Number
DELL	Notebook	GX620	D65874152
DELL	Adapter1	LA65NS0-00	DF263
SHEN TIANYIN	Adapter	TPA-46B050100UU	SHEN TIANYIN
Fengfan	Debug Board	/	/

## External I/O Cable

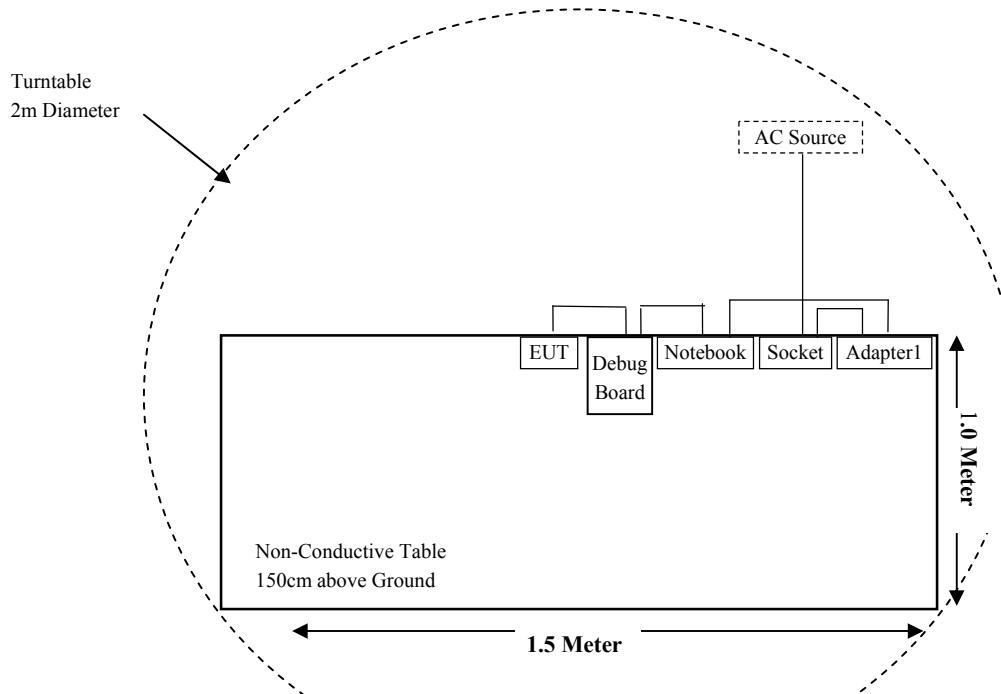
Cable Description	Length (m)	From Port	To
Power Cable	1.2	Notebook	Adapter 1
USB Cable 1	0.8	Notebook	Debug Board
USB Cable 2	0.3	Debug Board	EUT

## Block Diagram of Test Setup

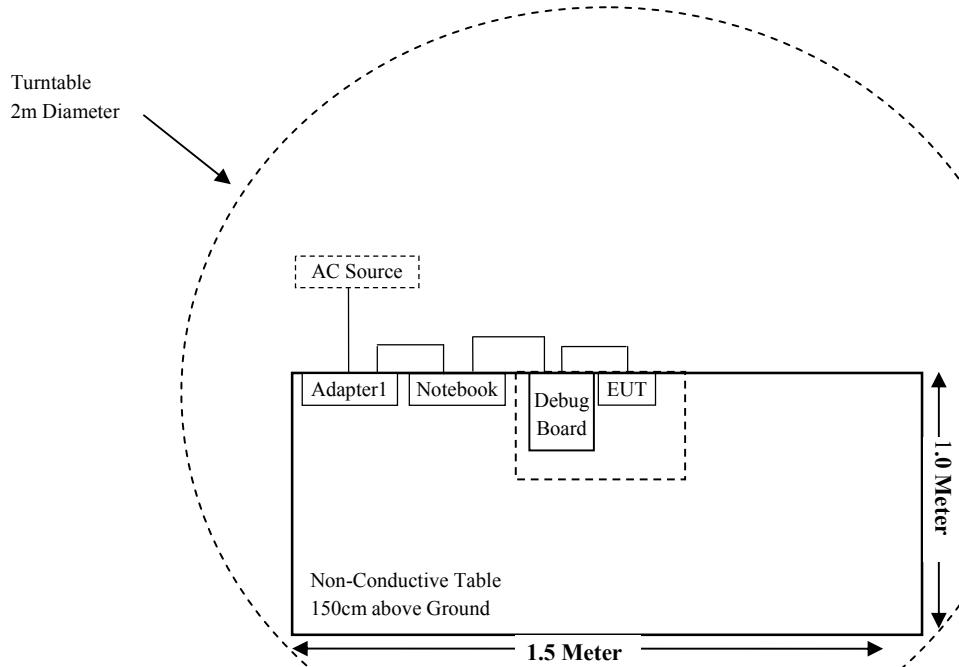
For Conducted Emissions:



For Radiated Emissions(Below 1GHz):



For Radiated Emissions(Above 1GHz):



**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Result
FCC§15.247 (i), §1.1307 &§2.1093	RF EXPOSURE	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	Radiated Emissions & Restricted Bands Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

## TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Radiated Emission Test (Chamber 1#)</b>					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2019-07-11	2020-07-10
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrumen	Pre-amplifier	310N	171205	2019-08-14	2020-08-13
Audix	Test Software	e3	V9	--	--
MICRO-COAX	Coaxial Cable	Cable-8	008	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2019-08-15	2020-08-14
<b>Radiated Emission Test (Chamber 2#)</b>					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2019-08-27	2020-08-26
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2017-07-15	2020-07-14
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-12-12	2019-12-11
A.H.Systems, inc	Amplifier	2641-1	491	2019-02-20	2020-02-19
SELECTOR	Amplifier	EM18G40G	060726	2019-03-22	2020-03-21
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2019-08-05	2020-08-04
Narda	Attenuator	10dB	010	2019-08-15	2020-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2019-08-15	2020-08-14
<b>RF Conducted Test</b>					
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2019-07-23	2020-07-22
Narda	Attenuator	10dB	010	2019-08-15	2020-08-14
Fengfan	RF Cable	Fengfan C01	C01	Each Time	/
<b>Conducted Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2019-07-11	2020-07-10
Rohde & Schwarz	LISN	ENV216	3560655016	2018-11-30	2019-11-29
Audix	Test Software	e3	V9	--	--
Narda	Attenuator/6dB	10690812-2	26850-6	2019-01-10	2020-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2019-08-15	2020-08-14

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC §15.247 (I) & §1.1310 & §2.1093 - RF EXPOSURE

### Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is  $\leq 50$  mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

### Measurement Result

For worst case:

Mode	Frequency Range (MHz)	Max Tune-up Conducted Power		Calculated Distance (mm)	Calculated Value	Threshold (1-g SAR)	SAR Test Exclusion
		(dBm)	(mW)				
BT	2402-2480	5.50	3.55	5.0	1.1	3.0	Yes

**Result: No SAR test is required.**

## **FCC §15.203 – ANTENNA REQUIREMENT**

### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **Antenna Connector Construction**

The EUT has a LDS antenna for Bluetooth, and the antenna gain is -1.7 dBi, which is permanently attached to the unit, fulfill the requirement of this section. Please refer to the EUT photos.

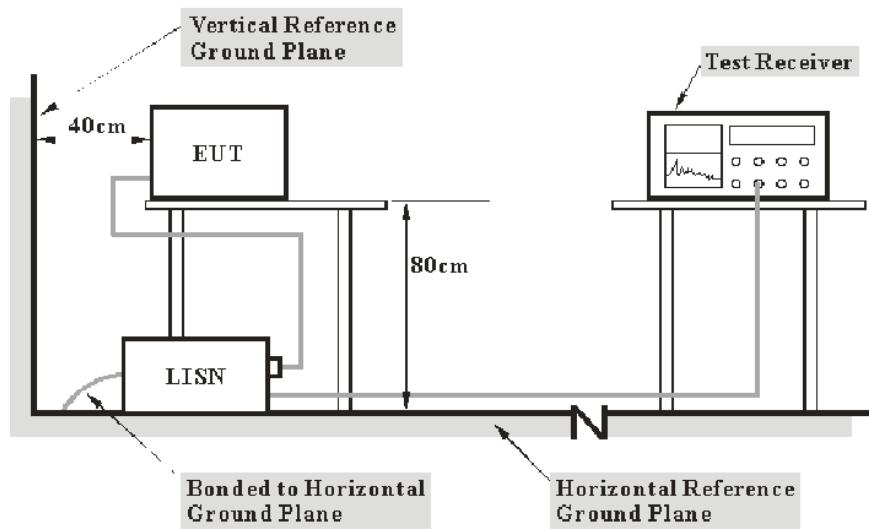
**Result:** Compliant.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC §15.207(a)

### EUT Setup



**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Corrected Factor & Over Limit Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

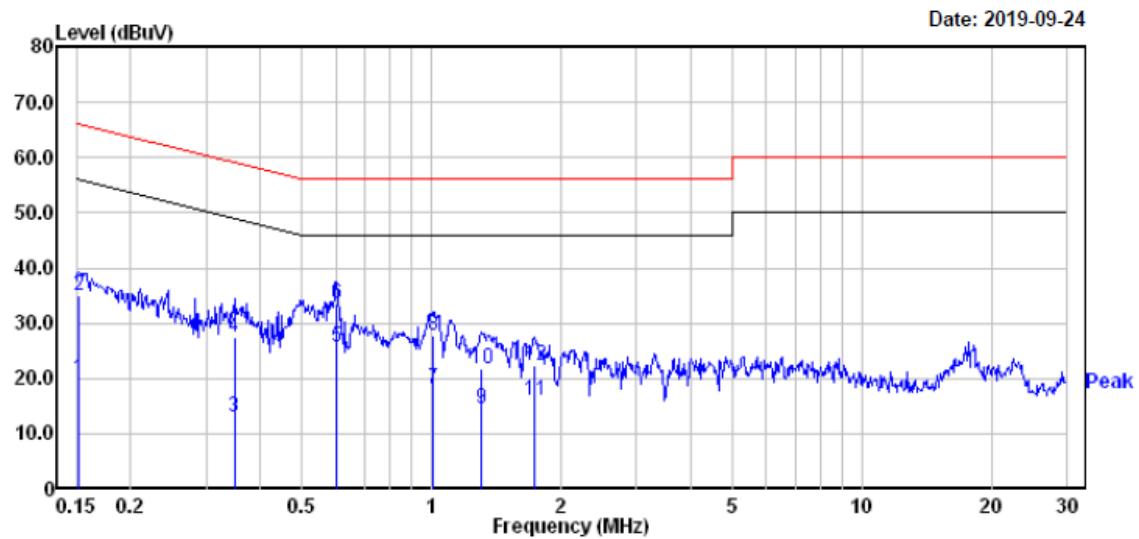
## Test Data

### Environmental Conditions

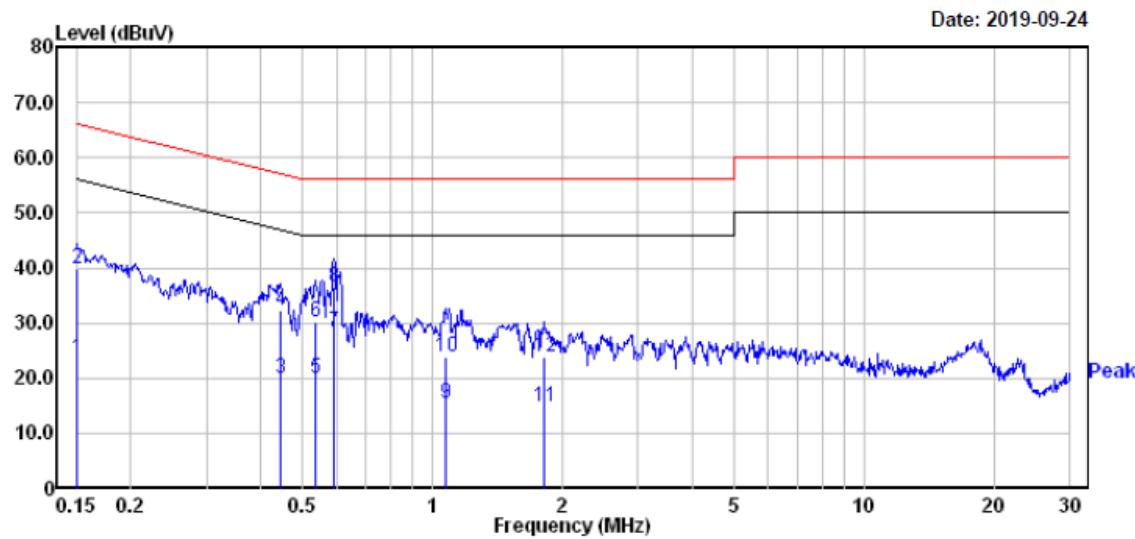
Temperature:	25.4 °C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

*The testing was performed by Winnie Yang on 2019-09-24.*

*EUT operation mode: Charging*

**AC 120V/60 Hz, Line**

Freq	Read		Limit	Over	Remark
	MHz	dBuV			
1	0.152	0.10	19.82	19.92	55.91 -35.99 Average
2	0.152	15.20	19.82	35.02	65.91 -30.89 QP
3	0.348	-6.80	19.81	13.01	49.00 -35.99 Average
4	0.348	7.60	19.81	27.41	59.00 -31.59 QP
5	0.601	5.80	19.75	25.55	46.00 -20.45 Average
6	0.601	13.70	19.75	33.45	56.00 -22.55 QP
7	1.010	-1.60	19.82	18.22	46.00 -27.78 Average
8	1.010	8.00	19.82	27.82	56.00 -28.18 QP
9	1.310	-5.20	19.82	14.62	46.00 -31.38 Average
10	1.310	2.00	19.82	21.82	56.00 -34.18 QP
11	1.734	-3.90	19.84	15.94	46.00 -30.06 Average
12	1.734	2.60	19.84	22.44	56.00 -33.56 QP

**AC 120V/60 Hz, Neutral**

Freq	Read		Level	Limit	Over	Remark
	MHz	dBuV				
1	0.150	3.80	19.82	23.62	56.00	-32.38 Average
2	0.150	19.90	19.82	39.72	66.00	-26.28 QP
3	0.444	0.30	19.75	20.05	46.98	-26.93 Average
4	0.444	12.50	19.75	32.25	56.98	-24.73 QP
5	0.535	0.21	19.75	19.96	46.00	-26.04 Average
6	0.535	10.41	19.75	30.16	56.00	-25.84 QP
7	0.592	8.70	19.75	28.45	46.00	-17.55 Average
8	0.592	16.90	19.75	36.65	56.00	-19.35 QP
9	1.071	-4.30	19.82	15.52	46.00	-30.48 Average
10	1.071	4.00	19.82	23.82	56.00	-32.18 QP
11	1.810	-5.00	19.84	14.84	46.00	-31.16 Average
12	1.810	3.90	19.84	23.74	56.00	-32.26 QP

**Note:**

- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)  
 2) Over Limit (dB) = Read level (dB $\mu$ V) + Factor (dB) - Limit (dB $\mu$ V)

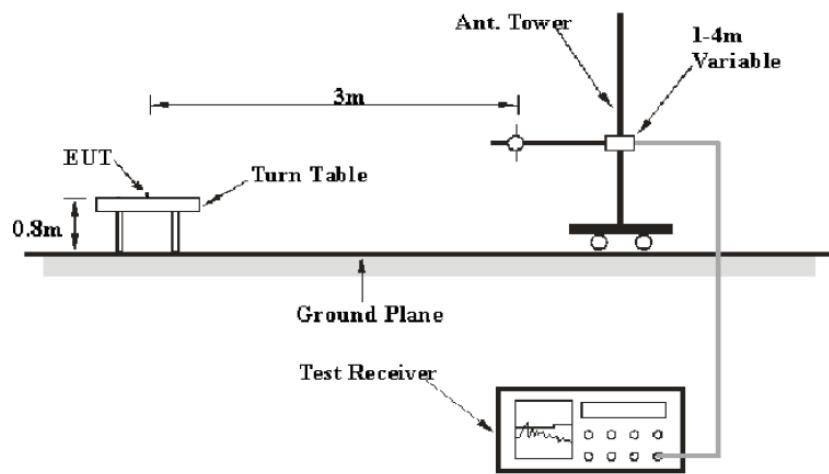
## FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

### Applicable Standard

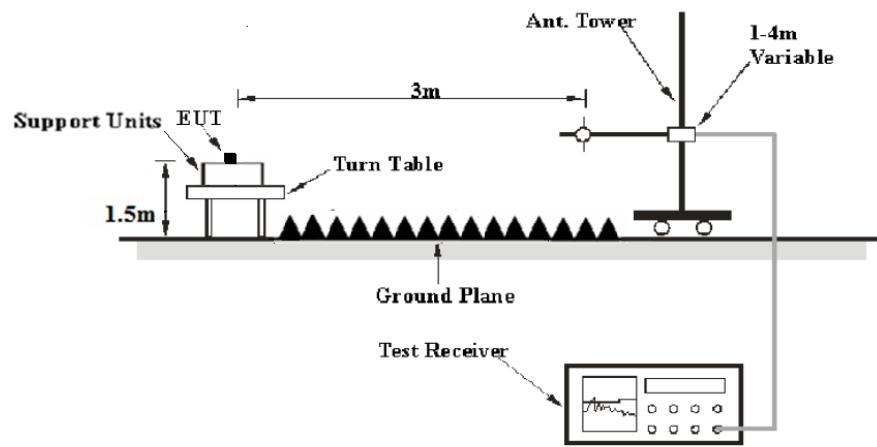
FCC §15.205; §15.209; §15.247(d)

### EUT Setup

Below 1 GHz:



Above 1GHz:



The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

## EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude (dB $\mu$ V/m) = Meter Reading (dB $\mu$ V) + Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dB $\mu$ V/m) – Corrected Amplitude (dB $\mu$ V/m)

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

## Test Data

### Environmental Conditions

<b>Temperature:</b>	23.1-24.8 °C
<b>Relative Humidity:</b>	48-50 %
<b>ATM Pressure:</b>	101.0-101.2kPa

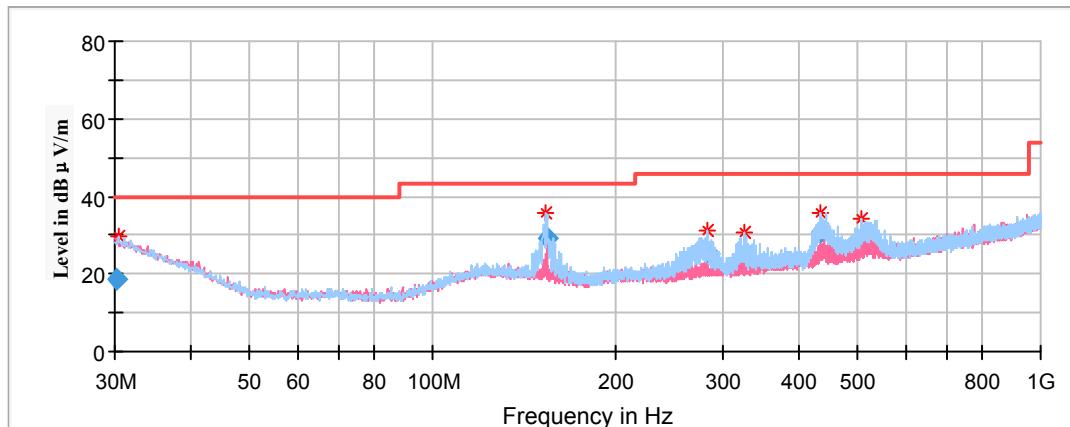
The testing was performed by Winnie Yang from 2019-09-17 to 2019-10-12

EUT operation mode: Transmitting

### Spurious Emission Test:

#### 30MHz-1GHz: Earbuds(L)

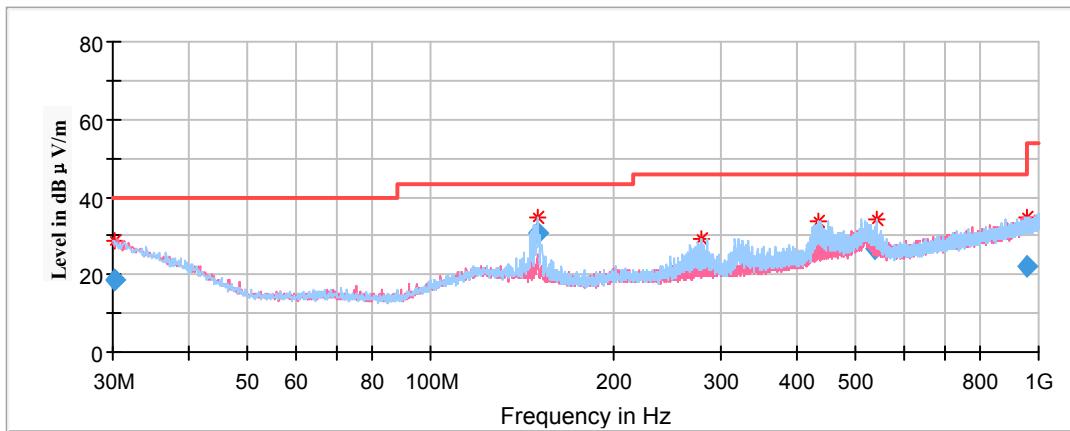
Pre-Scan with GFSK,  $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case high channel of 8DPSK Mode in Z-axis of orientation was recorded



Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Correcte d Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Quasi-peak (dBμV/m)	Height (cm)	Polar (H/V)				
30.117477	18.72	101.0	H	13.0	-4.0	40.00	21.28
154.599650	29.13	199.0	H	213.0	-12.5	43.50	14.37
284.068150	25.16	101.0	H	18.0	-11.0	46.00	20.84
324.438700	24.17	101.0	H	0.0	-10.0	46.00	21.83
434.497600	30.83	101.0	H	91.0	-7.7	46.00	15.17
507.221650	27.20	199.0	H	217.0	-6.1	46.00	18.80

**30MHz-1GHz: Earbuds(R)**

*Pre-Scan with GFSK, π/4-DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case high channel of 8DPSK Mode in Z-axis of orientation was recorded*



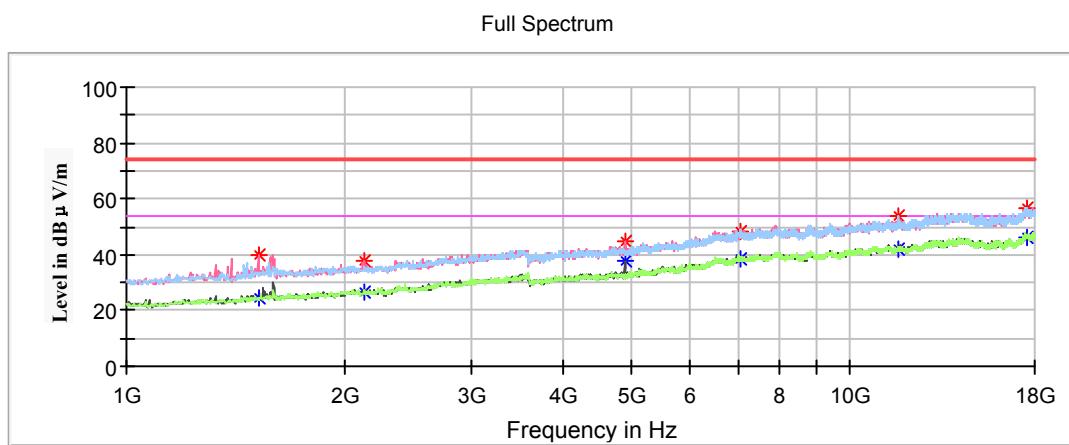
Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Correcte d Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	Quasi-peak (dBµV/m)	Height (cm)	Polar (H/V)				
30.298456	18.76	101.0	V	332.0	-4.1	40.00	21.24
150.332650	30.68	199.0	H	66.0	-12.3	43.50	12.82
280.402200	23.73	101.0	H	67.0	-11.1	46.00	22.27
433.449500	27.58	101.0	H	252.0	-7.7	46.00	18.42
539.872550	26.85	199.0	H	2.0	-5.7	46.00	19.15
958.864150	22.36	199.0	H	45.0	1.5	46.00	23.64

**1GHz-18GHz: Earbuds(L)**

*Pre-Scan with GFSK,  $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case high channel of 8DPSK Mode in Z-axis of orientation was recorded*

Note:

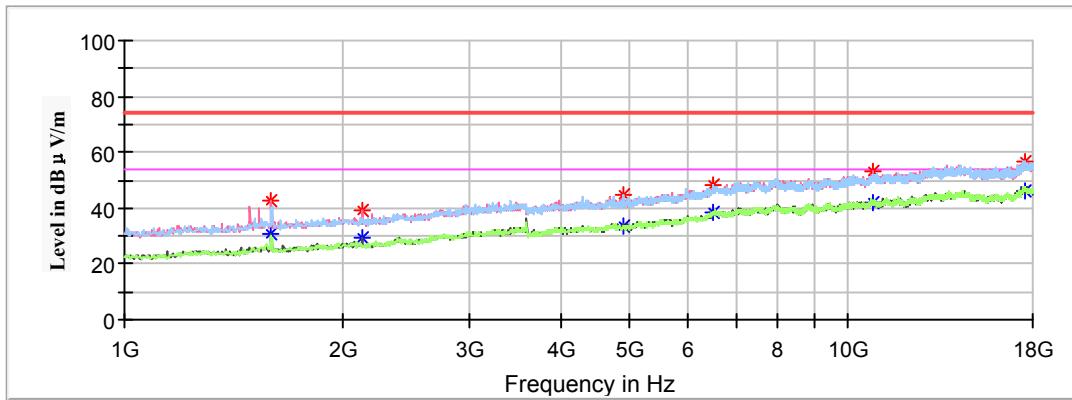
1. This test was performed with the 2.4-2.5 GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)  
 Corrected Amplitude (dB $\mu$ V /m) = Corrected Factor (dB/m) + Reading (dB $\mu$ V)  
 Margin (dB) = Limit (dB $\mu$ V/m) – Corrected Amplitude (dB $\mu$ V /m)

**Low Channel: 2402MHz**

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	MaxPeak (dB $\mu$ V /m)	Average (dB $\mu$ V /m)	Height (cm)	Polar (H/V)				
1520.200000	---	24.71	250.0	V	320.0	-9.9	54.00	29.29
1520.200000	39.93	---	250.0	V	320.0	-9.9	74.00	34.07
2128.800000	---	26.83	200.0	V	182.0	-7.9	54.00	27.17
2128.800000	37.69	---	200.0	V	182.0	-7.9	74.00	36.31
4804.000000	---	37.53	200.0	V	117.0	-0.4	54.00	16.47
4804.000000	44.92	---	200.0	V	117.0	-0.4	74.00	29.08
7206.000000	---	38.50	150.0	V	308.0	5.4	54.00	15.50
7206.000000	48.27	---	150.0	V	308.0	5.4	74.00	25.73
11689.600000	---	41.62	200.0	H	356.0	9.9	54.00	12.38
11689.600000	53.84	---	200.0	H	356.0	9.9	74.00	20.16
17517.200000	---	46.33	150.0	V	344.0	14.3	54.00	7.67
17517.200000	56.59	---	150.0	V	344.0	14.3	74.00	17.41

**Middle Channel: 2441MHz**

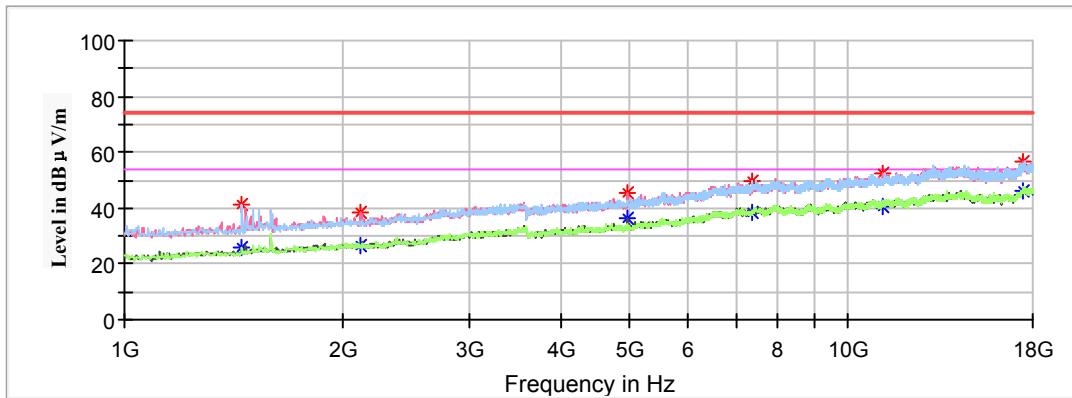
Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	MaxPeak (dB $\mu$ V /m)	Average (dB $\mu$ V /m)	Height (cm)	Polar (H/V)				
1595.000000	---	30.56	200.0	V	109.0	-9.6	54.00	23.44
1595.000000	42.33	---	200.0	V	109.0	-9.6	74.00	31.67
2128.800000	---	29.37	250.0	V	153.0	-7.9	54.00	24.63
2128.800000	39.32	---	250.0	V	153.0	-7.9	74.00	34.68
4882.000000	---	33.83	100.0	H	282.0	-0.4	54.00	20.17
4882.000000	44.55	---	100.0	H	282.0	-0.4	74.00	29.45
6504.600000	---	38.49	200.0	H	347.0	4.4	54.00	15.51
6504.600000	48.38	---	200.0	H	347.0	4.4	74.00	25.62
10822.600000	---	42.14	250.0	V	247.0	9.5	54.00	11.86
10822.600000	52.97	---	250.0	V	247.0	9.5	74.00	21.03
17605.600000	---	46.47	150.0	H	0.0	14.1	54.00	7.53
17605.600000	56.72	---	150.0	H	0.0	14.1	74.00	17.28

**High Channel: 2480MHz**

Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	MaxPeak (dB $\mu$ V /m)	Average (dB $\mu$ V /m)	Height (cm)	Polar (H/V)				
1452.200000	---	25.58	150.0	H	62.0	-10.2	54.00	28.42
1452.200000	41.13	---	150.0	H	62.0	-10.2	74.00	32.87
2122.000000	---	26.86	150.0	V	161.0	-7.9	54.00	27.14
2122.000000	38.14	---	150.0	V	161.0	-7.9	74.00	35.86
4960.000000	---	36.04	150.0	V	3.0	-0.3	54.00	17.96
4960.000000	45.29	---	150.0	V	3.0	-0.3	74.00	28.71
7440.000000	---	38.49	200.0	V	5.0	5.9	54.00	15.51
7440.000000	49.87	---	200.0	V	5.0	5.9	74.00	24.13
11135.400000	---	40.83	150.0	V	210.0	9.8	54.00	13.17
11135.400000	52.25	---	150.0	V	210.0	9.8	74.00	21.75
17479.800000	---	46.08	150.0	V	45.0	14.2	54.00	7.92
17479.800000	56.63	---	150.0	V	45.0	14.2	74.00	17.37

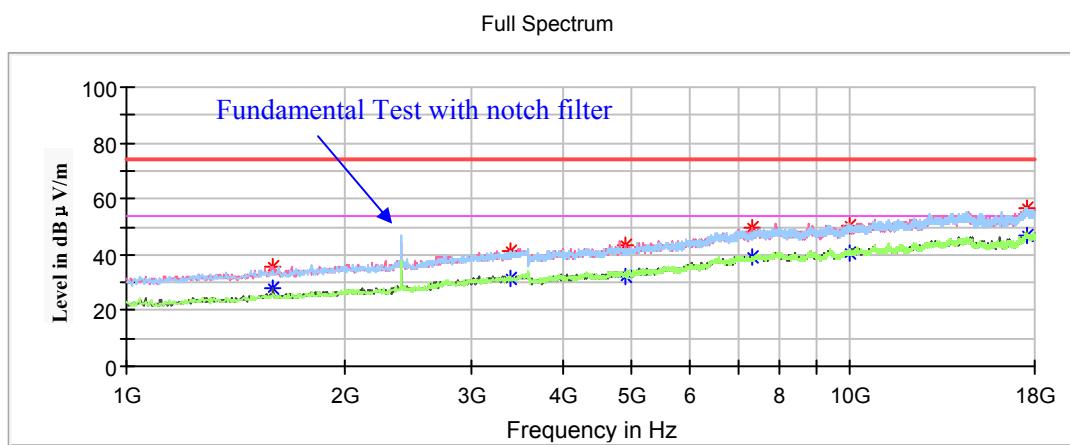
## 1GHz-18GHz: Earbuds(R)

*Pre-Scan with GFSK,  $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case high channel of 8DPSK Mode in Z-axis of orientation was recorded*

Note:

1. This test was performed with the 2.4-2.5 GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)  
Corrected Amplitude (dB $\mu$ V /m) = Corrected Factor (dB/m) + Reading (dB $\mu$ V)  
Margin (dB) = Limit (dB $\mu$ V/m) – Corrected Amplitude (dB $\mu$ V /m)

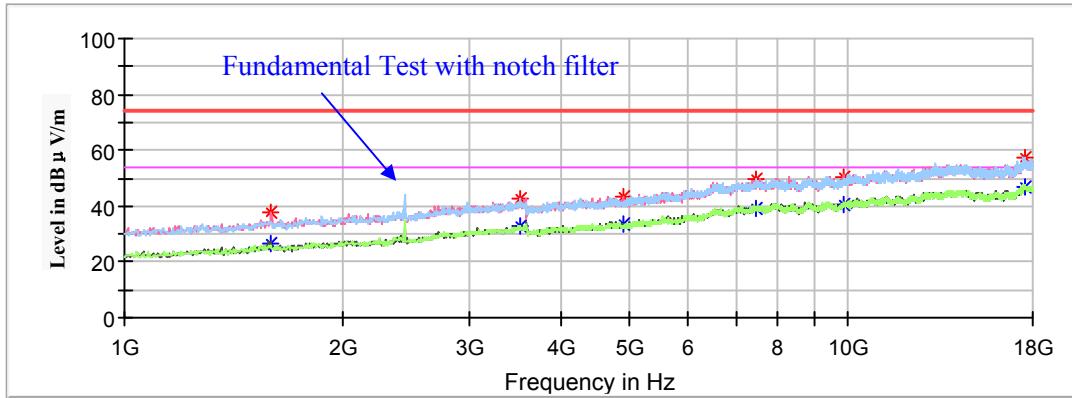
### Low Channel: 2402MHz



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	MaxPeak (dB $\mu$ V /m)	Average (dB $\mu$ V /m)	Height (cm)	Polar (H/V)				
1591.500000	---	27.69	200.0	V	93.0	-9.6	54.00	26.31
1591.500000	35.83	---	200.0	V	93.0	-9.6	74.00	38.17
3401.200000	---	31.74	150.0	H	98.0	-3.7	54.00	22.26
3401.200000	41.36	---	150.0	H	98.0	-3.7	74.00	32.64
4804.000000	---	32.43	200.0	V	257.0	-0.4	54.00	21.57
4804.000000	43.02	---	200.0	V	257.0	-0.4	74.00	30.98
7206.000000	---	38.90	200.0	V	34.0	5.8	54.00	15.10
7206.000000	49.92	---	200.0	V	34.0	5.8	74.00	24.08
9968.800000	---	40.47	150.0	H	168.0	8.2	54.00	13.53
9968.800000	50.46	---	150.0	H	168.0	8.2	74.00	23.54
17592.070000	---	47.09	200.0	H	319.0	14.1	54.00	6.91
17592.070000	56.49	---	200.0	H	319.0	14.1	74.00	17.51

**Middle Channel: 2441MHz**

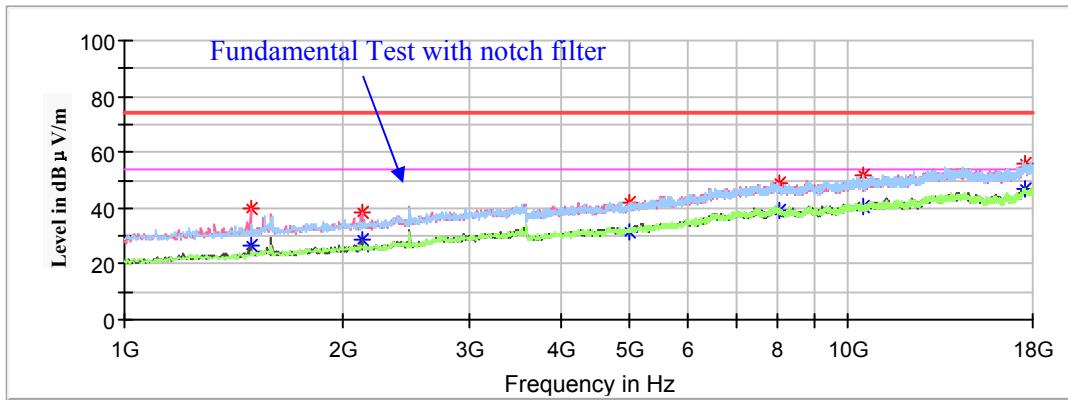
Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	MaxPeak (dB $\mu$ V /m)	Average (dB $\mu$ V /m)	Height (cm)	Polar (H/V)				
1595.300000	---	26.38	150.0	V	151.0	-9.6	54.00	27.62
1595.300000	38.09	---	150.0	V	151.0	-9.6	74.00	35.91
3525.400000	---	32.55	200.0	H	0.0	-3.5	54.00	21.45
3525.400000	42.69	---	200.0	H	0.0	-3.5	74.00	31.31
4882.000000	---	33.47	150.0	V	233.0	-0.4	54.00	20.53
4882.000000	43.62	---	150.0	V	233.0	-0.4	74.00	30.38
7323.000000	---	39.45	150.0	H	0.0	6.1	54.00	14.55
7323.000000	49.69	---	150.0	H	0.0	6.1	74.00	24.31
9891.600000	---	40.51	150.0	V	263.0	8.1	54.00	13.49
9891.600000	50.36	---	150.0	V	263.0	8.1	74.00	23.64
17537.800000	---	46.70	150.0	H	3.0	14.2	54.00	7.30
17537.800000	57.46	---	150.0	H	3.0	14.2	74.00	16.54

**High Channel: 2480MHz**

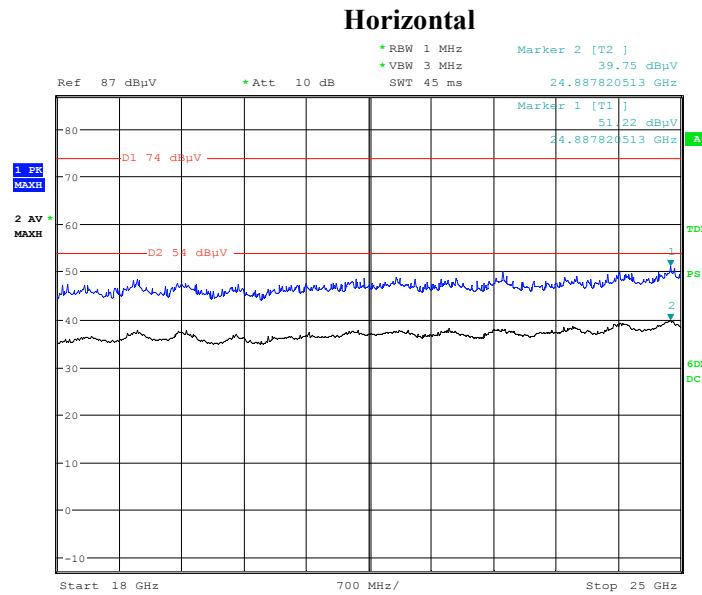
Full Spectrum



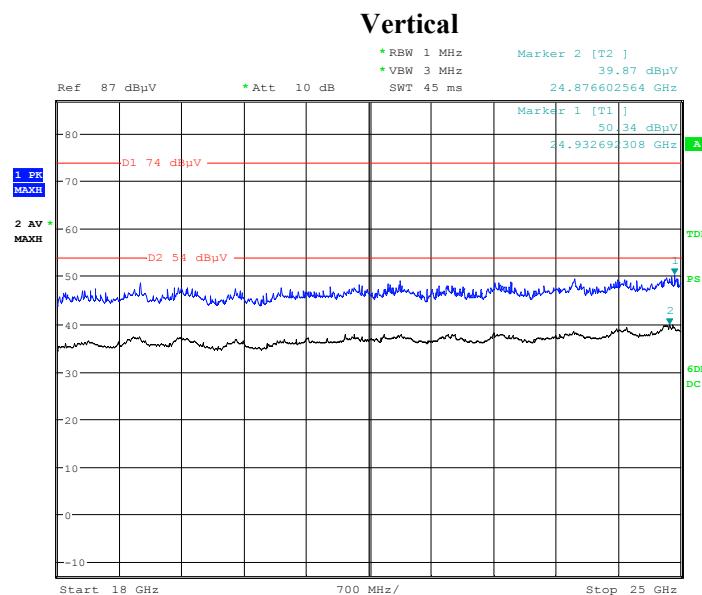
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	MaxPeak (dB $\mu$ V /m)	Average (dB $\mu$ V /m)	Height (cm)	Polar (H/V)				
1493.000000	---	26.39	150.0	V	260.0	-10.0	54.00	27.61
1493.000000	39.92	---	150.0	V	260.0	-10.0	74.00	34.08
2128.800000	---	28.62	150.0	V	260.0	-7.9	54.00	25.38
2128.800000	38.32	---	150.0	V	260.0	-7.9	74.00	35.68
4960.000000	---	31.57	200.0	V	320.0	-0.3	54.00	22.43
4960.000000	42.14	---	200.0	V	320.0	-0.3	74.00	31.86
8014.200000	---	39.13	150.0	V	352.0	7.0	54.00	14.87
8014.200000	49.24	---	150.0	V	352.0	7.0	74.00	24.76
10506.400000	---	40.28	150.0	H	0.0	9.0	54.00	13.72
10506.400000	52.03	---	150.0	H	0.0	9.0	74.00	21.97
17547.800000	---	46.78	200.0	H	200.0	14.2	54.00	7.22
17547.800000	56.18	---	200.0	H	200.0	14.2	74.00	17.82

## 18GHz-25GHz: Earbuds(L)

*Pre-Scan with GFSK, π/4-DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case high channel of 8DPSK Mode in Z-axis of orientation was recorded*



Date: 26.SEP.2019 12:19:56

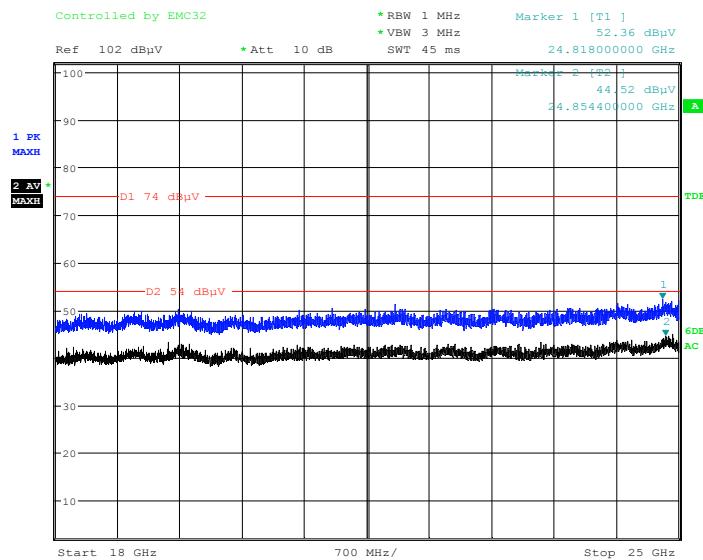


Date: 26.SEP.2019 12:38:02

## 18GHz-25GHz: Earbuds(R)

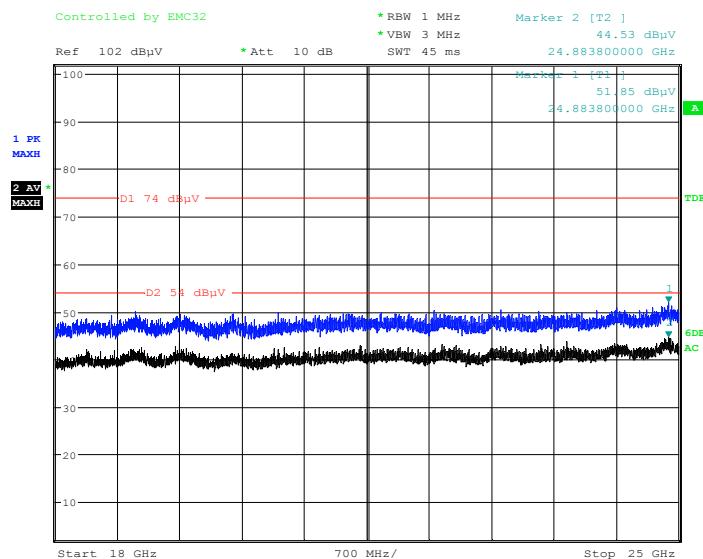
*Pre-Scan with GFSK, π/4-DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case high channel of 8DPSK Mode in Z-axis of orientation was recorded*

### Horizontal



Date: 12.OCT.2019 20:05:51

### Vertical



Date: 12.OCT.2019 17:06:40

### Restricted Bands Emissions: Earbuds(L)

*Pre-Scan with GFSK, π/4-DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case high channel of 8DPSK Mode in Z-axis of orientation was recorded*

Note:

Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)

Corrected Amplitude (dB $\mu$ V/m) = Corrected Factor (dB/m) + Reading (dB $\mu$ V)

Margin (dB) = Limit (dB $\mu$ V/m) – Corrected Amplitude (dB $\mu$ V/m)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2390.00	---	35.83	200.0	V	61.0	2.8	54.00	18.17
2390.00	45.97	---	200.0	V	61.0	2.8	74.00	28.03
2390.00	---	34.28	150.0	H	70.0	2.8	54.00	19.72
2390.00	44.19	---	150.0	H	70.0	2.8	74.00	29.81
High Channel: 2480MHz								
2483.50	---	36.62	150.0	V	172.0	3.0	54.00	17.38
2483.50	46.27	---	150.0	V	172.0	3.0	74.00	27.73
2483.50	---	35.47	200.0	H	137.0	3.0	54.00	18.53
2483.50	45.88	---	200.0	H	137.0	3.0	74.00	28.12

### Restricted Bands Emissions: Earbuds(R)

*Pre-Scan with GFSK, π/4-DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case high channel of 8DPSK Mode in Z-axis of orientation was recorded*

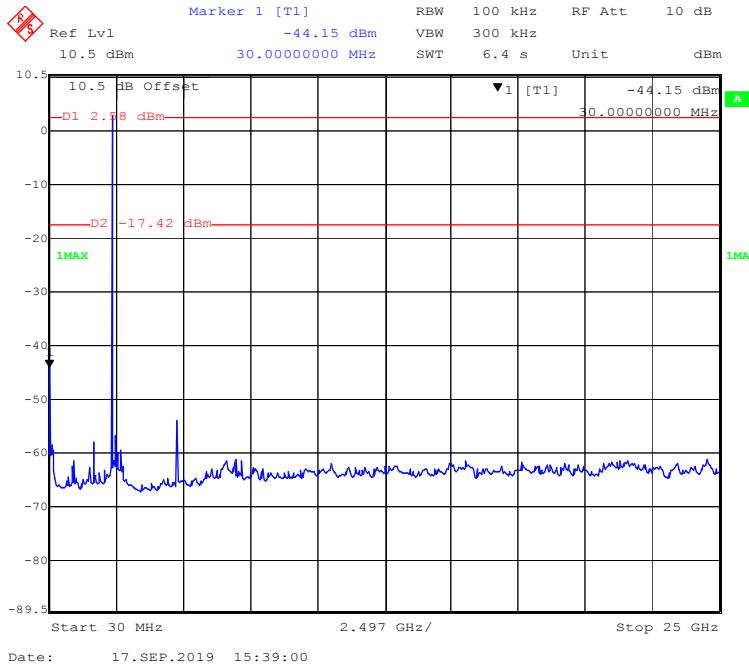
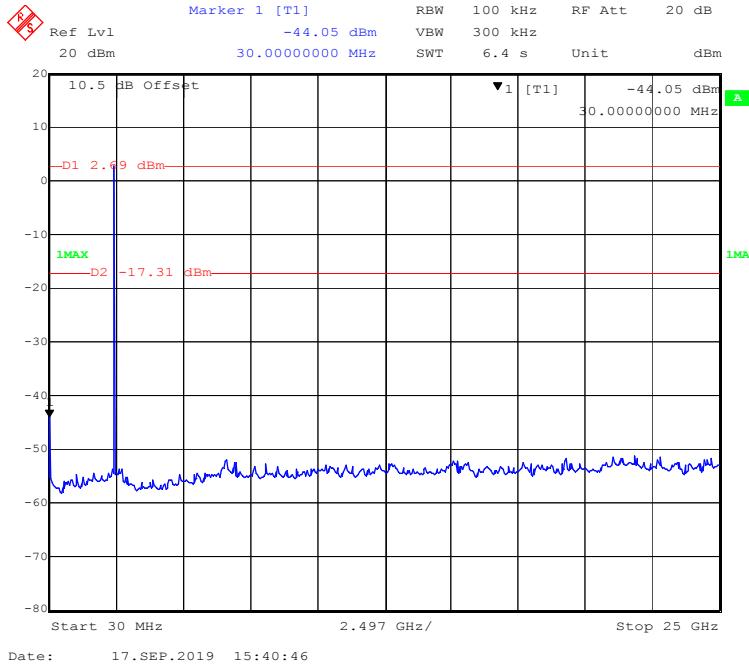
Note:

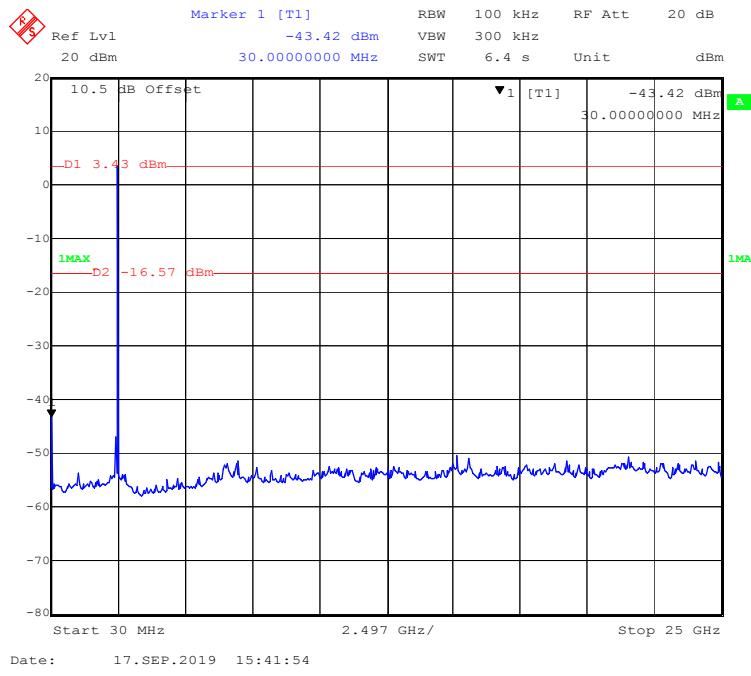
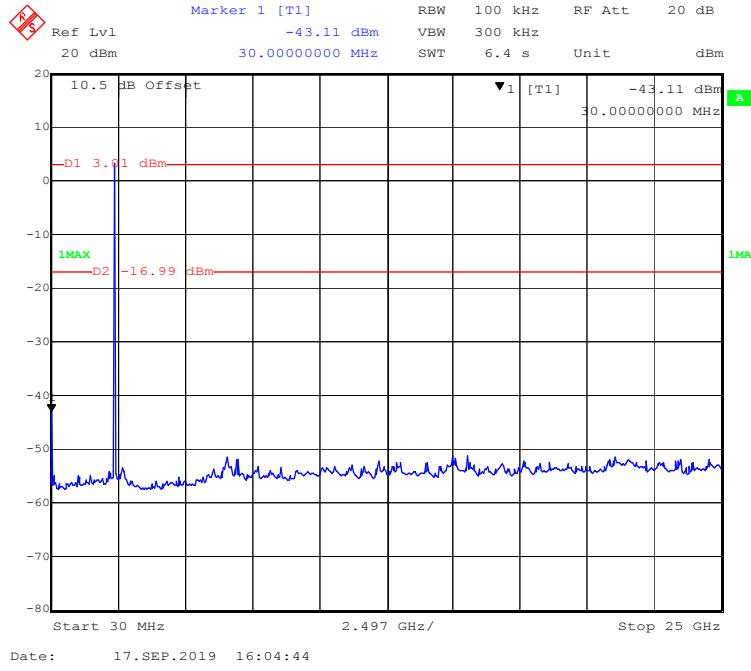
Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)

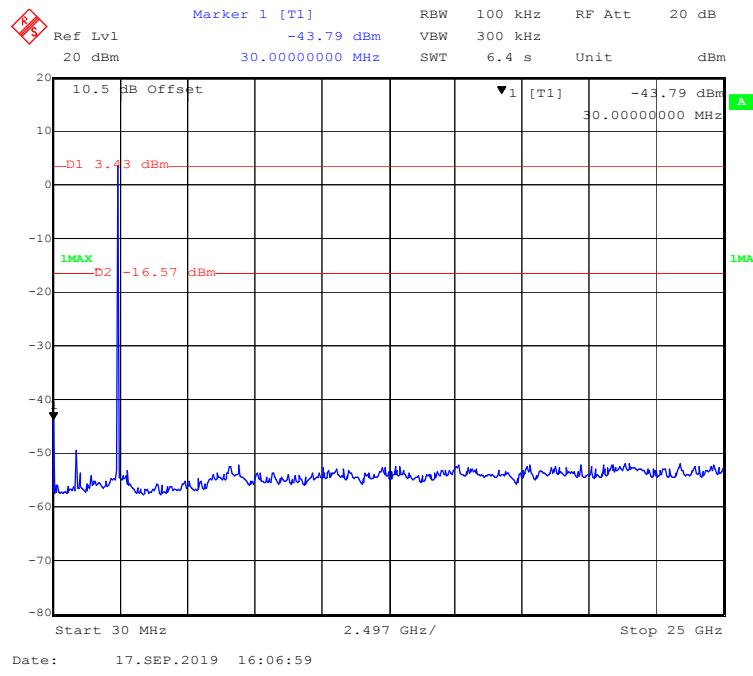
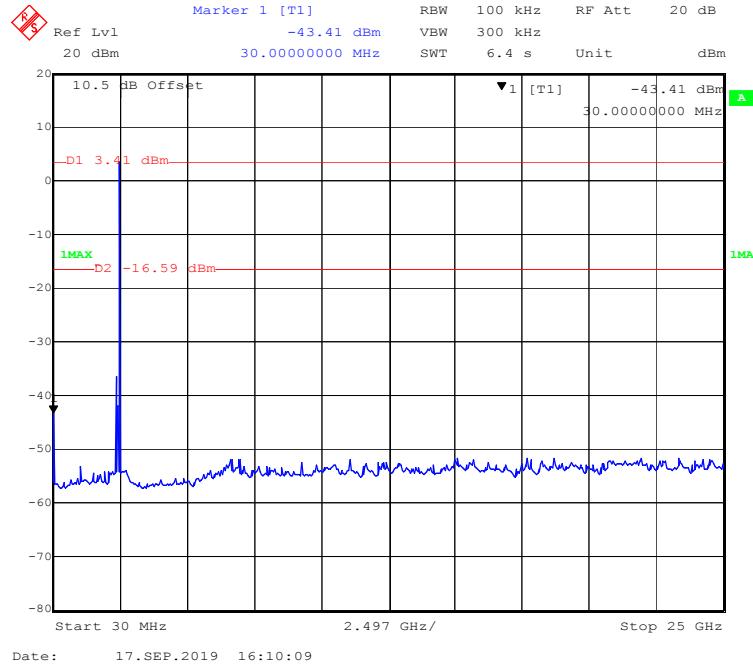
Corrected Amplitude (dB $\mu$ V/m) = Corrected Factor (dB/m) + Reading (dB $\mu$ V)

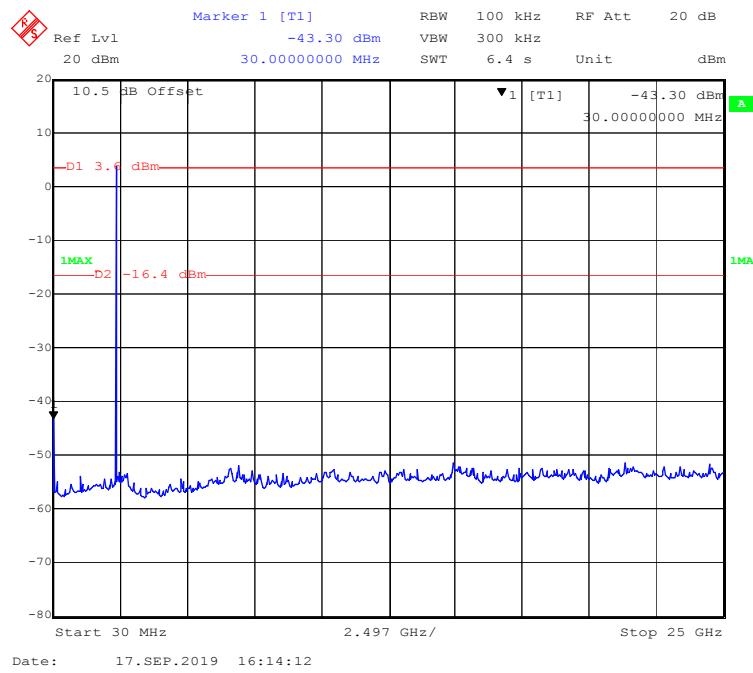
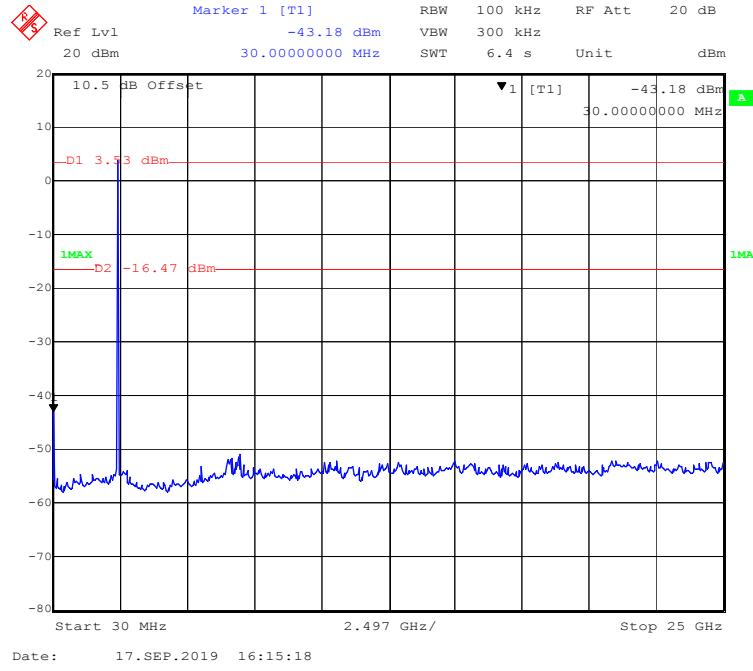
Margin (dB) = Limit (dB $\mu$ V/m) – Corrected Amplitude (dB $\mu$ V/m)

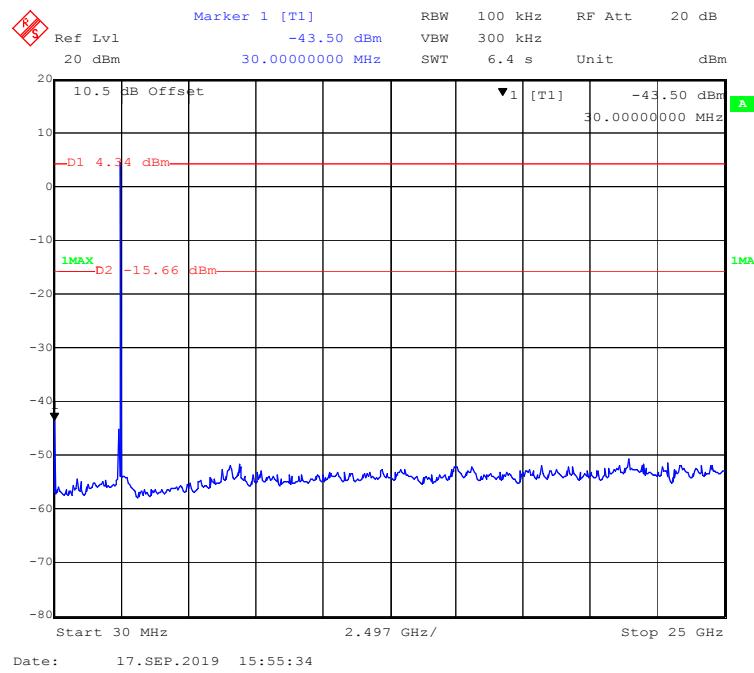
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2390.00	---	34.76	150.0	V	83.0	2.8	54.00	19.24
2390.00	44.89	---	150.0	V	83.0	2.8	74.00	29.11
2390.00	---	33.68	200.0	H	140.0	2.8	54.00	20.32
2390.00	43.19	---	200.0	H	140.0	2.8	74.00	30.81
High Channel: 2480MHz								
2483.50	---	35.72	150.0	V	253.0	3.0	54.00	18.28
2483.50	45.33	---	150.0	V	253.0	3.0	74.00	28.67
2483.50	---	34.83	150.0	H	142.0	3.0	54.00	19.17
2483.50	44.79	---	150.0	H	142.0	3.0	74.00	29.21

**Conducted Spurious Emissions at Antenna Port****BDR (GFSK): Low Channel****BDR (GFSK): Middle Channel**

**BDR (GFSK): High Channel****EDR ( $\pi/4$ -DQPSK): Low Channel**

**EDR ( $\pi/4$ -DQPSK): Middle Channel****EDR ( $\pi/4$ -DQPSK): High Channel**

**EDR (8DPSK): Low Channel****EDR (8DPSK): Middle Channel**

**EDR (8DPSK): High Channel**

## FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

### Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

### Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: Wide enough to capture the peaks of two adjacent channels.
- b. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c. Video (or average) bandwidth (VBW)  $\geq$  RBW.
- d. Sweep: Auto.
- e. Detector function: Peak.
- f. Trace: Max hold.
- g. Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

### Test Data

#### Environmental Conditions

Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

*The testing was performed by Winnie Yang on 2019-09-23.*

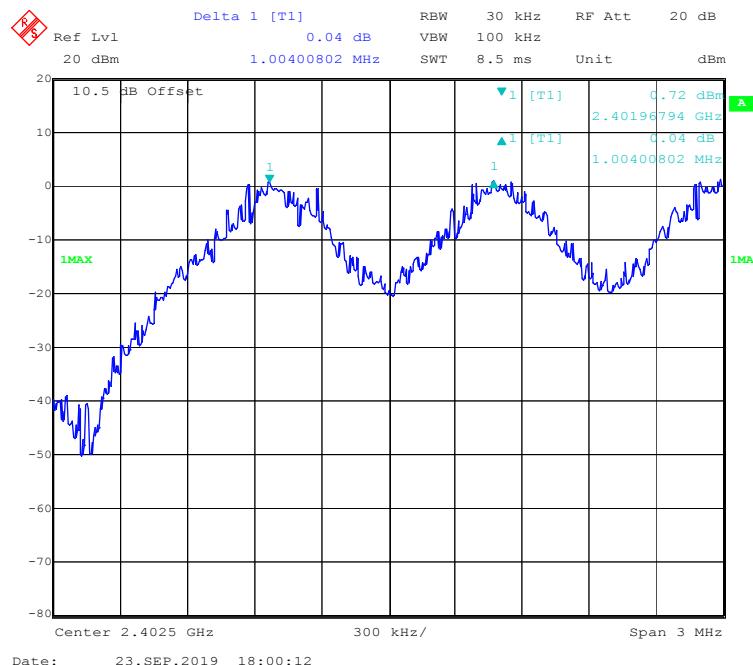
*EUT operation mode: Transmitting*

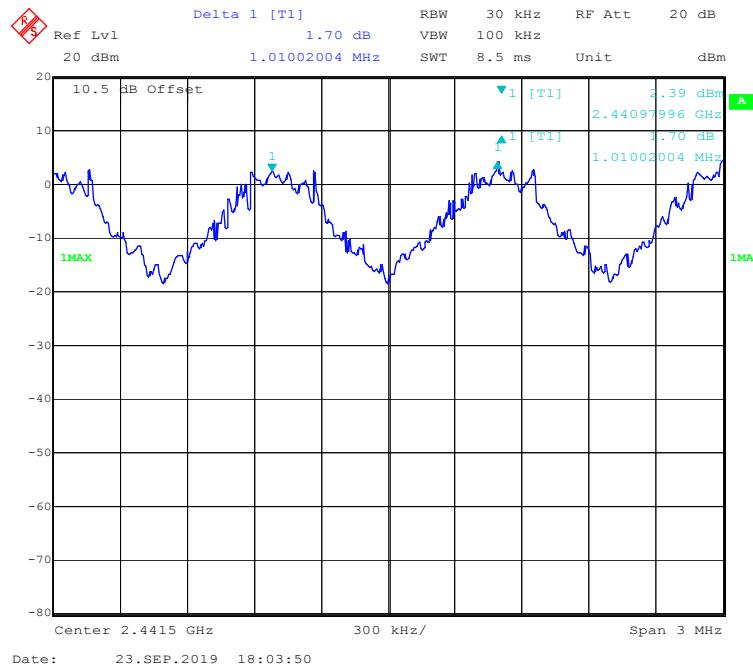
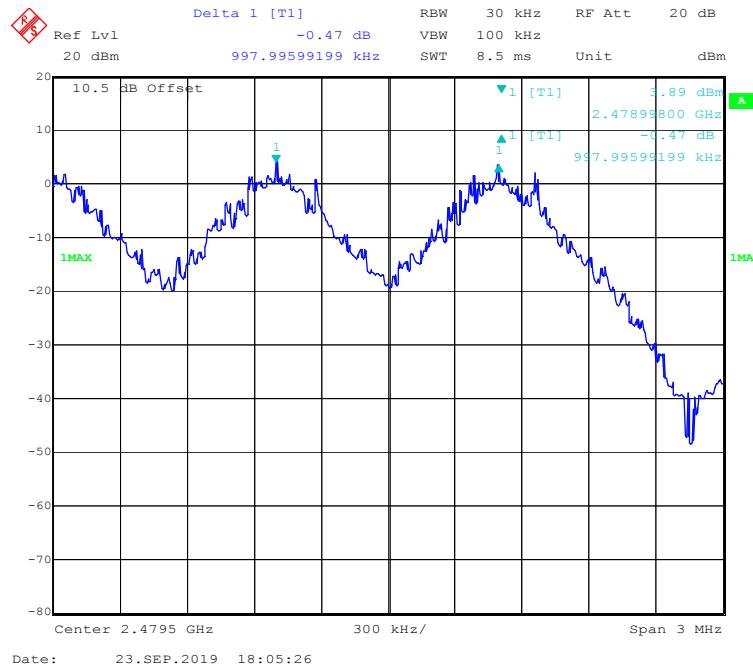
*Test Result: Compliant.*

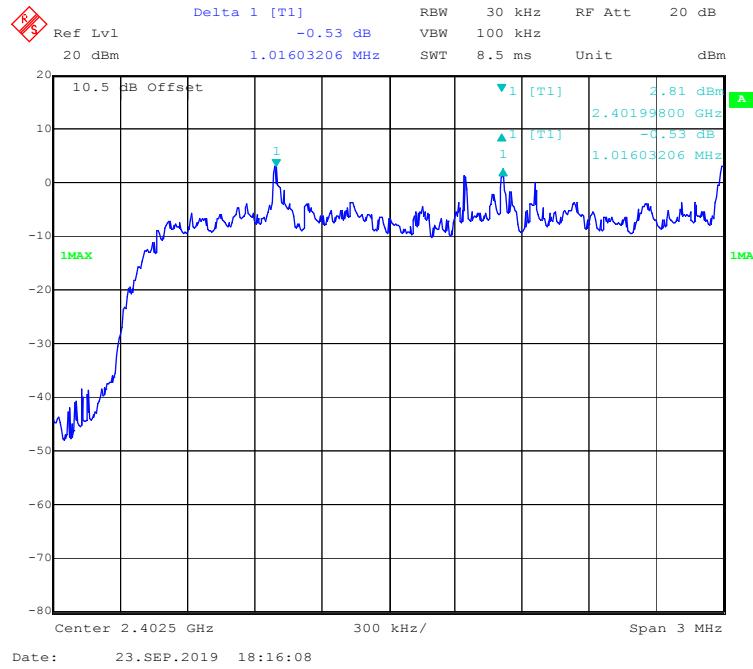
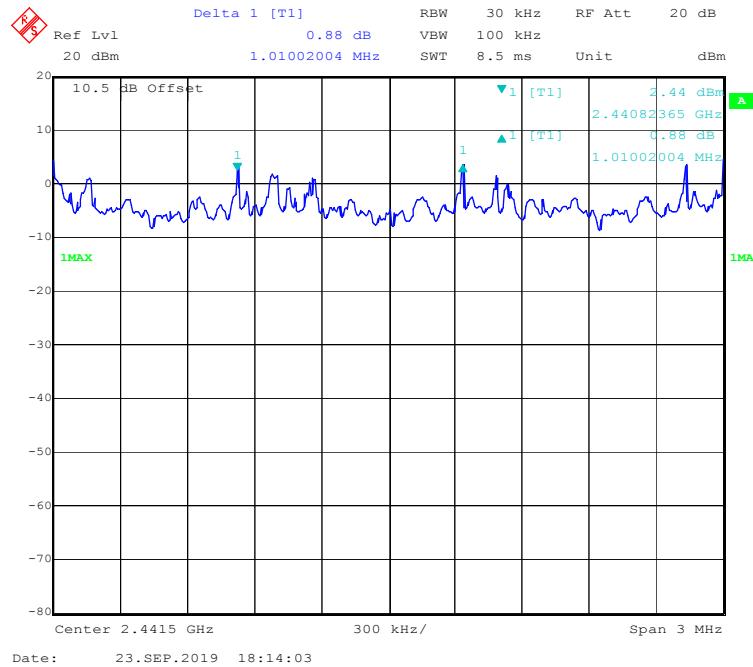
Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
BDR (GFSK)	Low	2402	1.004	0.629	Pass
	Adjacent	2403			
	Middle	2441			
	Adjacent	2442	1.010	0.593	Pass
	High	2480			
	Adjacent	2479			
EDR ( $\pi/4$ -DQPSK)	Low	2402	1.016	0.846	Pass
	Adjacent	2403			
	Middle	2441			
	Adjacent	2442	1.010	0.842	Pass
	High	2480			
	Adjacent	2479			
EDR (8DPSK)	Low	2402	1.010	0.858	Pass
	Adjacent	2403			
	Middle	2441			
	Adjacent	2442	1.034	0.858	Pass
	High	2480			
	Adjacent	2479			

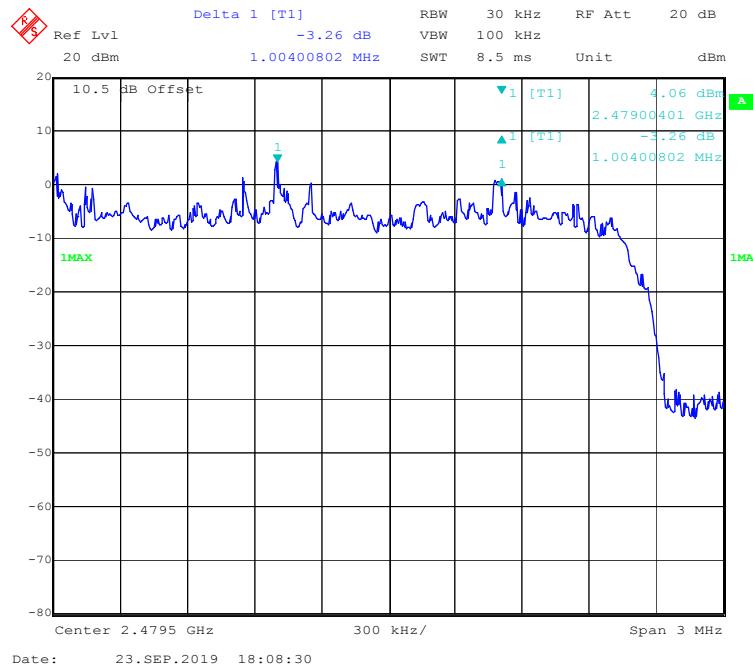
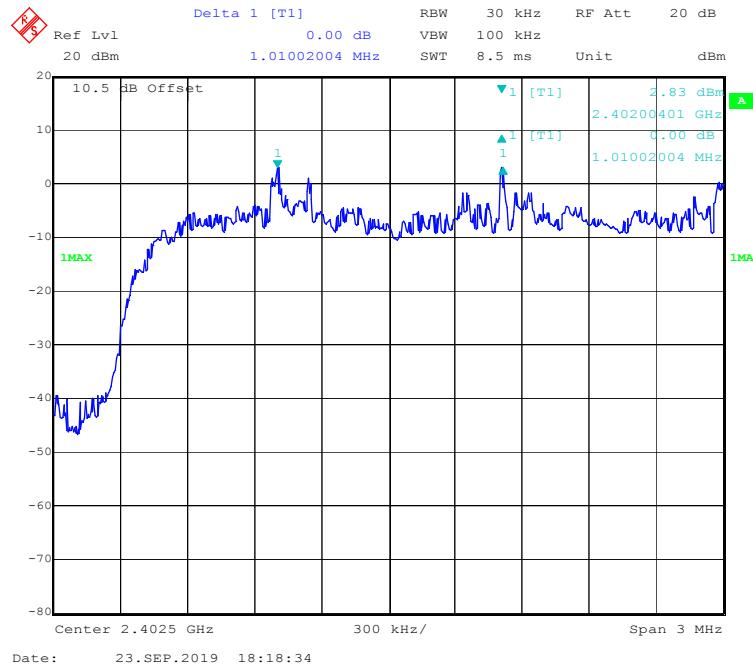
Note: For BDR and EDR mode, Limit = 20 dB bandwidth\*2/3

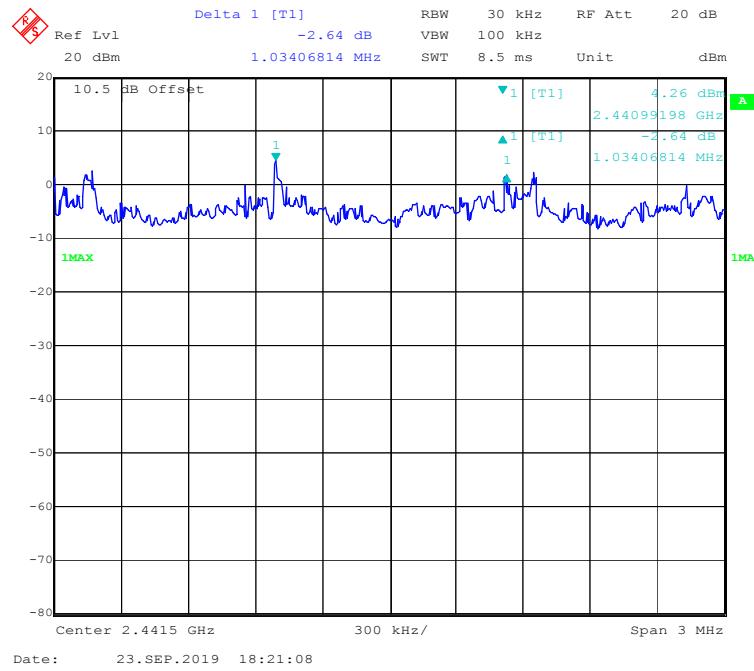
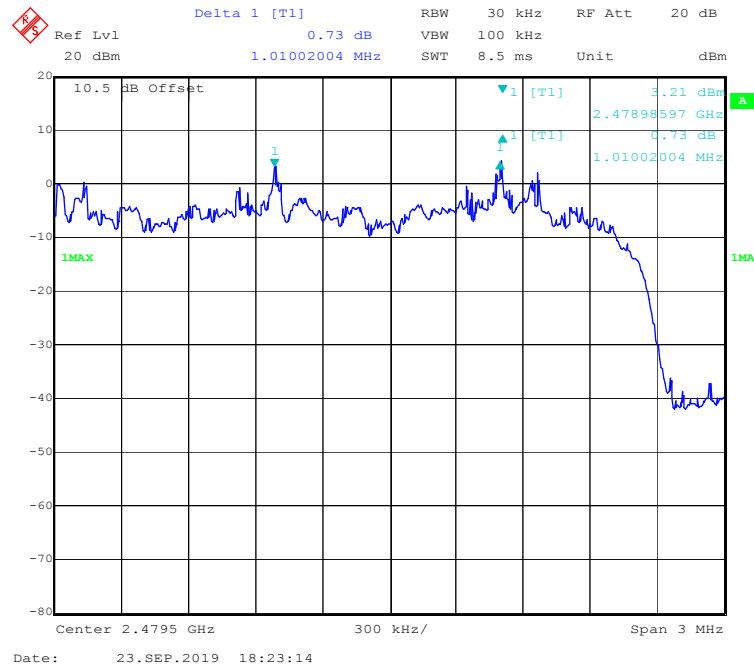
### BDR (GFSK): Low Channel



**BDR (GFSK): Middle Channel****BDR (GFSK): High Channel**

**EDR ( $\pi/4$ -DQPSK): Low Channel****EDR ( $\pi/4$ -DQPSK): Middle Channel**

**EDR ( $\pi/4$ -DQPSK): High Channel****EDR (8DPSK): Low Channel**

**EDR (8DPSK): Middle Channel****EDR (8DPSK): High Channel**

## FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

### Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### Test Data

#### Environmental Conditions

Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

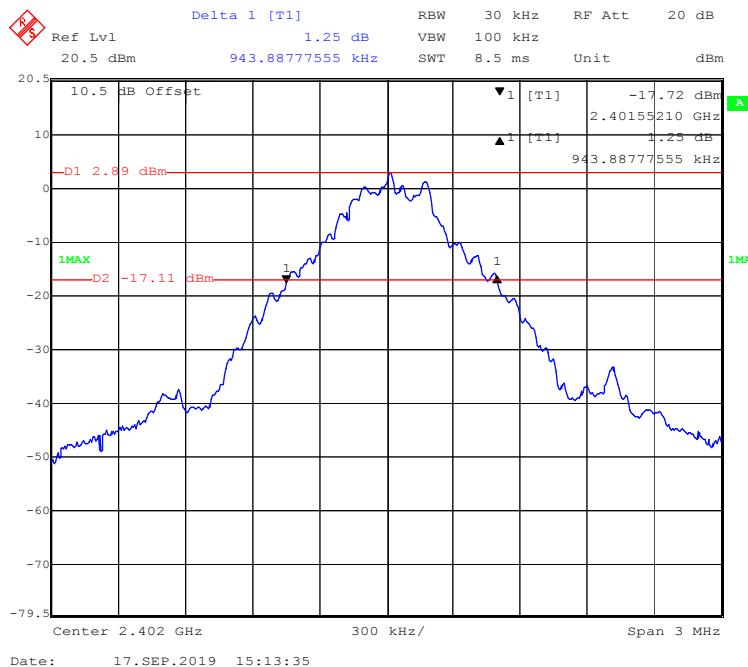
The testing was performed by Winnie Yang on 2019-09-17.

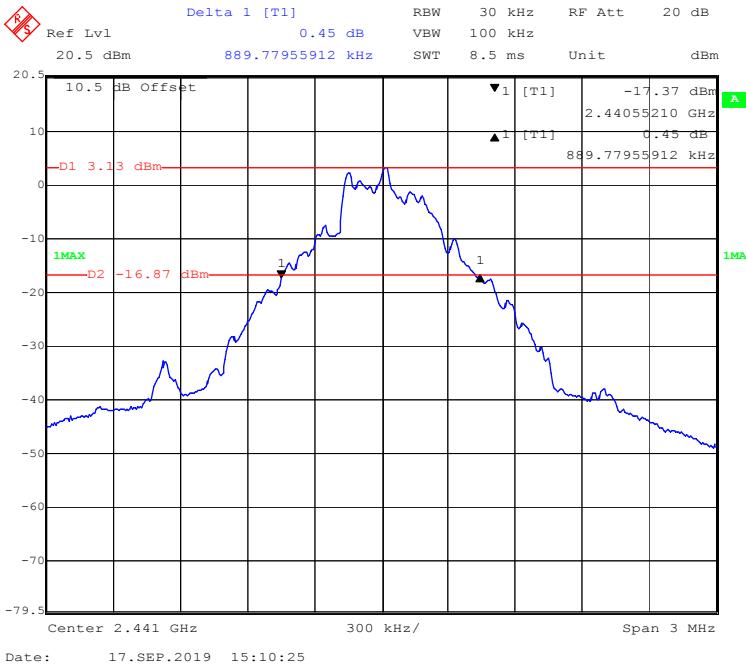
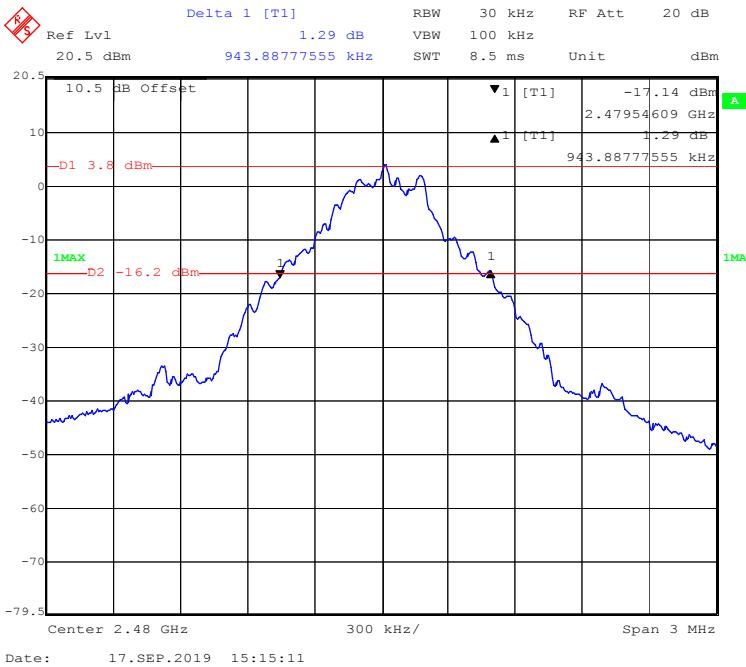
EUT operation mode: Transmitting

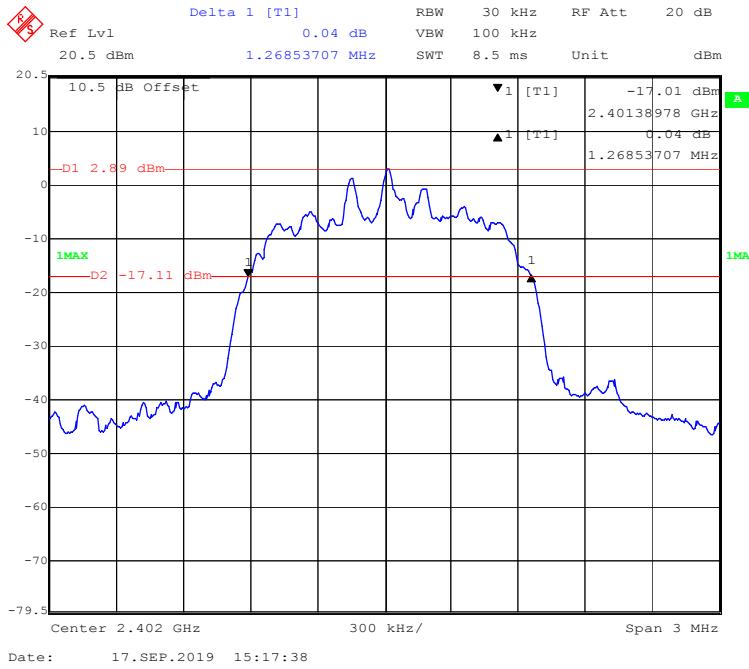
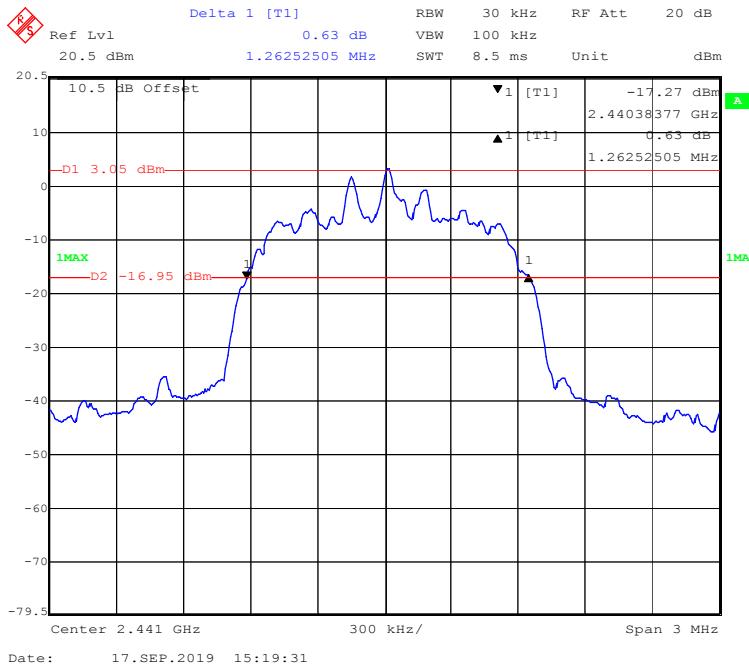
Test Result: Compliant.

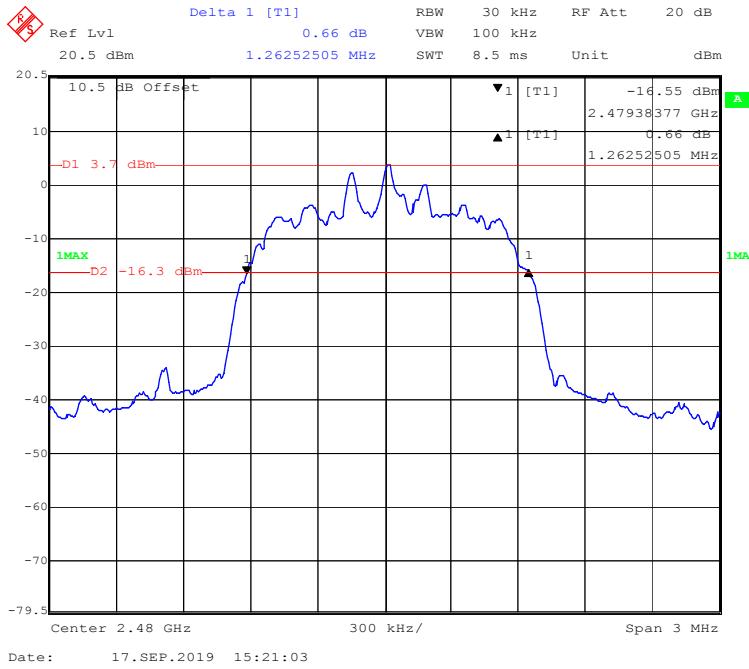
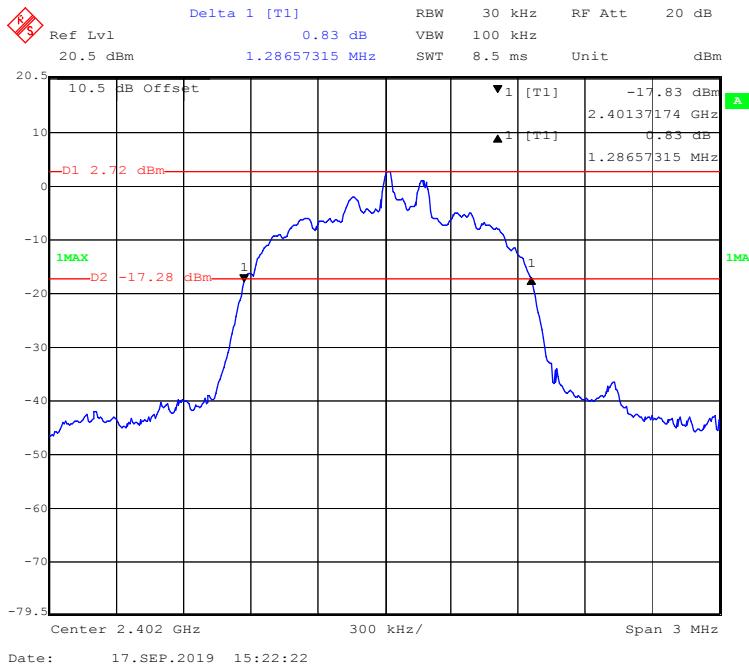
Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.944
	Middle	2441	0.890
	High	2480	0.944
EDR ( $\pi/4$ -DQPSK)	Low	2402	1.269
	Middle	2441	1.263
	High	2480	1.263
EDR (8DPSK)	Low	2402	1.287
	Middle	2441	1.287
	High	2480	1.275

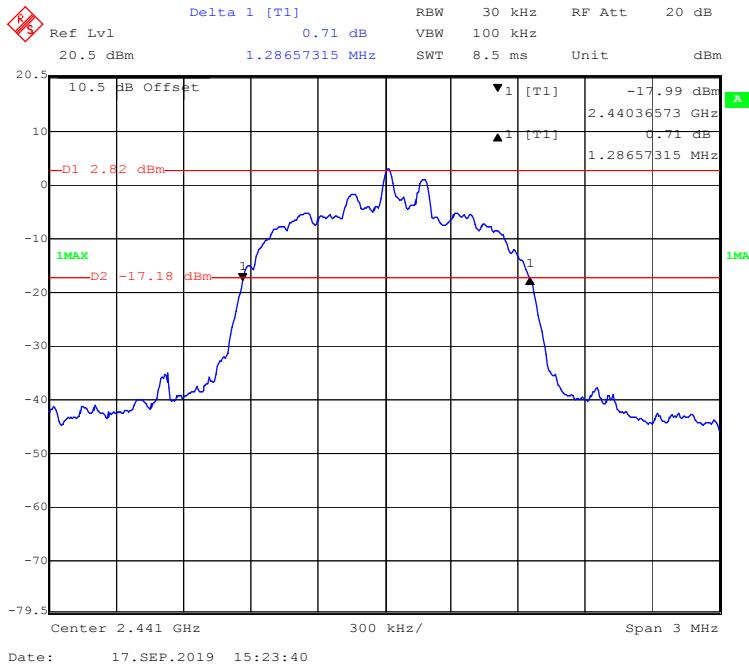
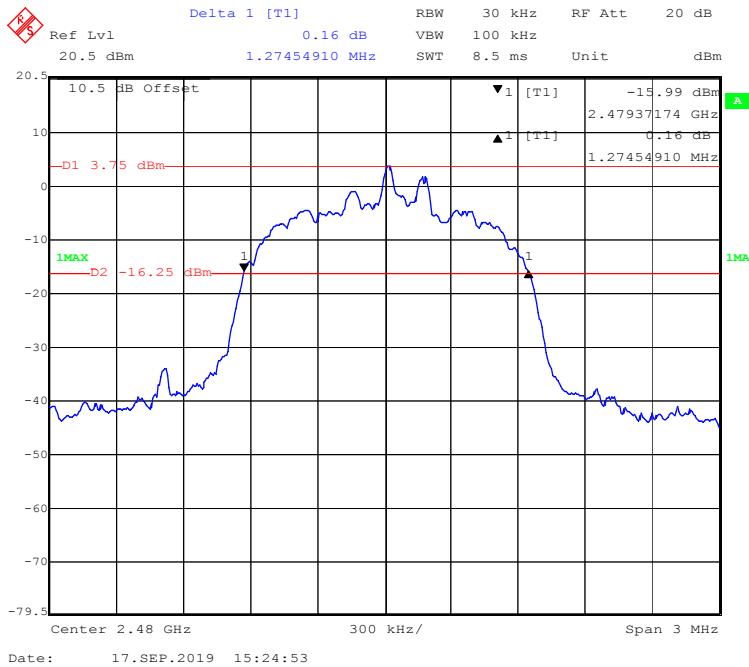
### BDR (GFSK): Low Channel



**BDR (GFSK): Middle Channel****BDR (GFSK): High Channel**

**EDR ( $\pi/4$ -DQPSK): Low Channel****EDR( $\pi/4$ -DQPSK): Middle Channel**

**EDR ( $\pi/4$ -DQPSK): High Channel****EDR (8DPSK): Low Channel**

**EDR (8DPSK): Middle Channel****EDR (8DPSK): High Channel**

## FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

### Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c. VBW  $\geq$  RBW.
- d. Sweep: Auto.
- e. Detector function: Peak.
- f. Trace: Max hold.
- g. Allow the trace to stabilize.

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies.

### Test Data

#### Environmental Conditions

Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

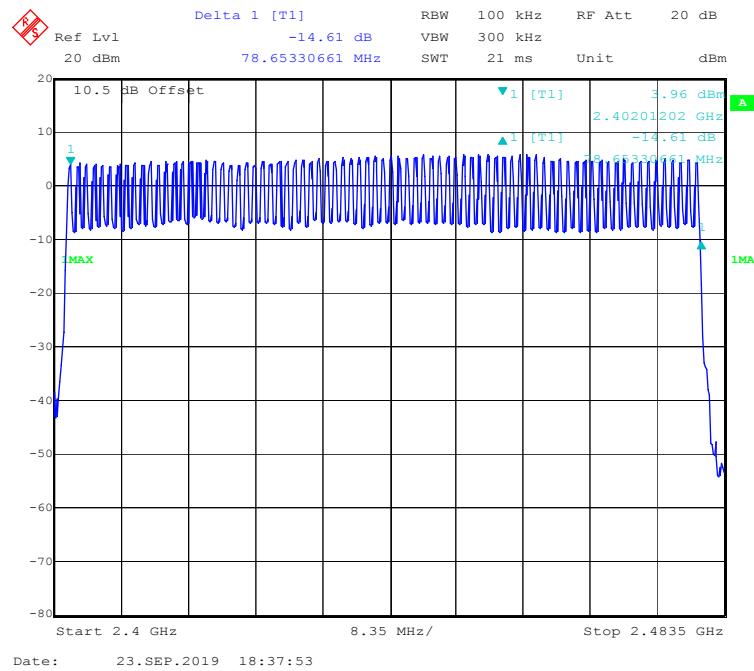
*The testing was performed by Winnie Yang on 2019-09-23.*

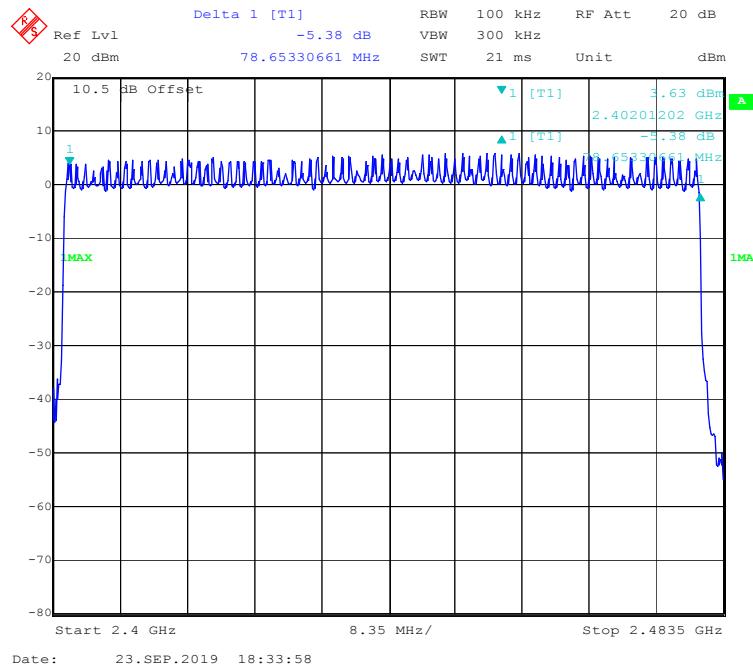
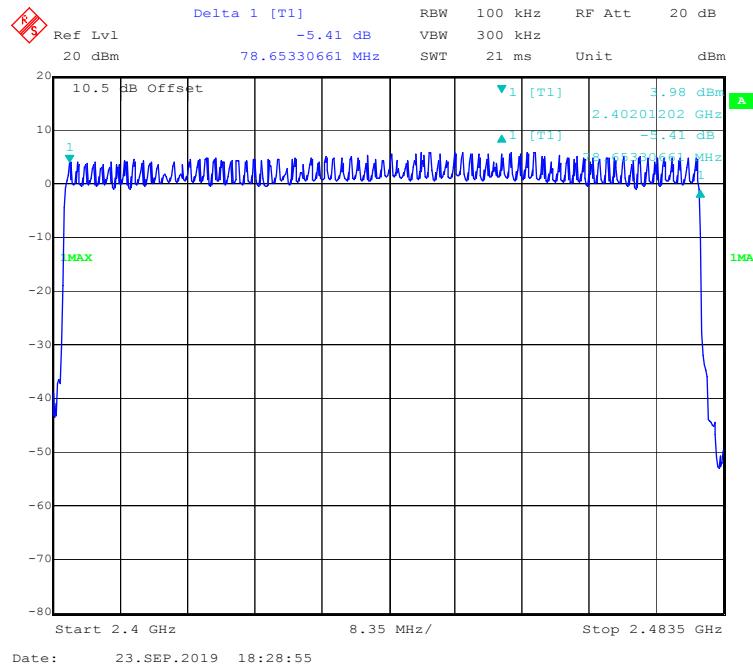
*EUT operation mode: Hopping*

*Test Result: Compliant.*

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	$\geq 15$
EDR ( $\pi/4$ -DQPSK)	2400-2483.5	79	$\geq 15$
EDR (8DPSK)	2400-2483.5	79	$\geq 15$

### BDR (GFSK): Number of Hopping Channels



**EDR ( $\pi/4$ -DQPSK): Number of Hopping Channels****EDR (8DPSK): Number of Hopping Channels**

**FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)****Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a Span: Zero span, centered on a hopping channel.
- b RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\geq 1 / T$ , where T is the expected dwell time per channel.
- c Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d Detector function: Peak.
- e Trace: Max hold.

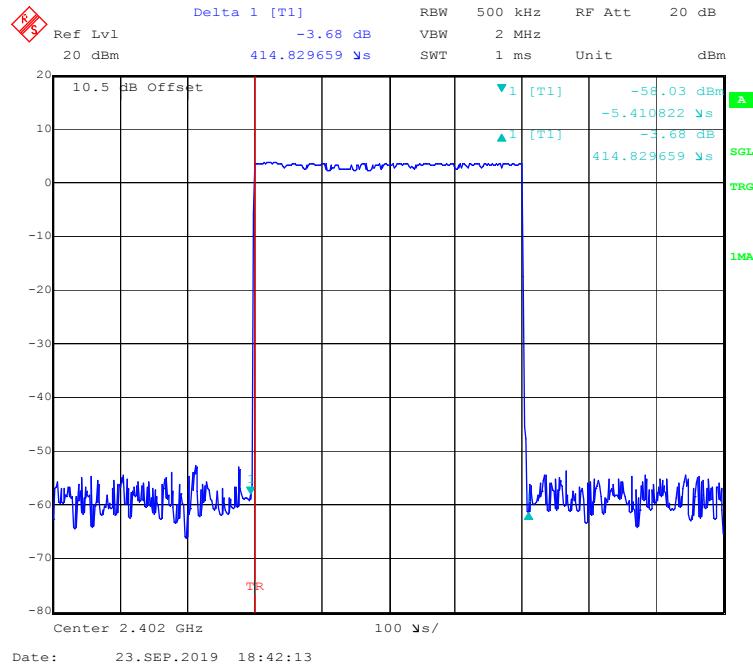
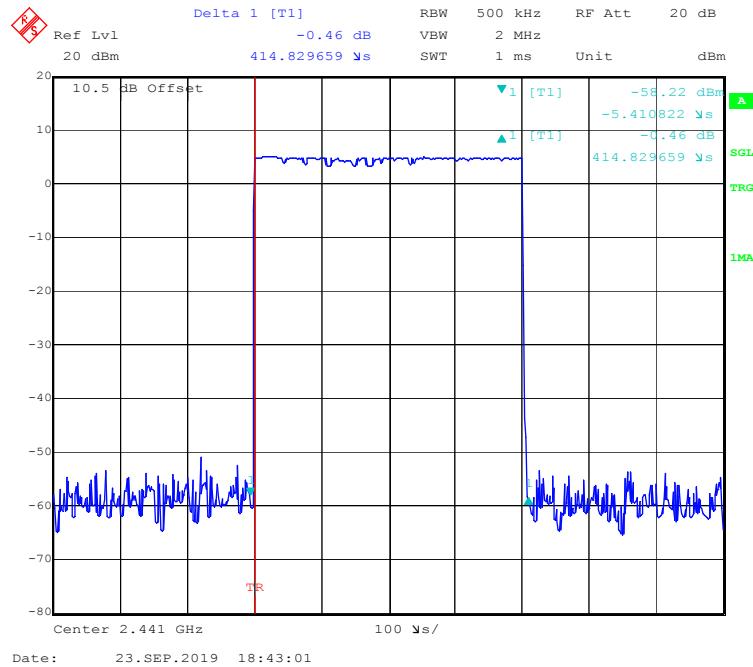
**Test Data****Environmental Conditions**

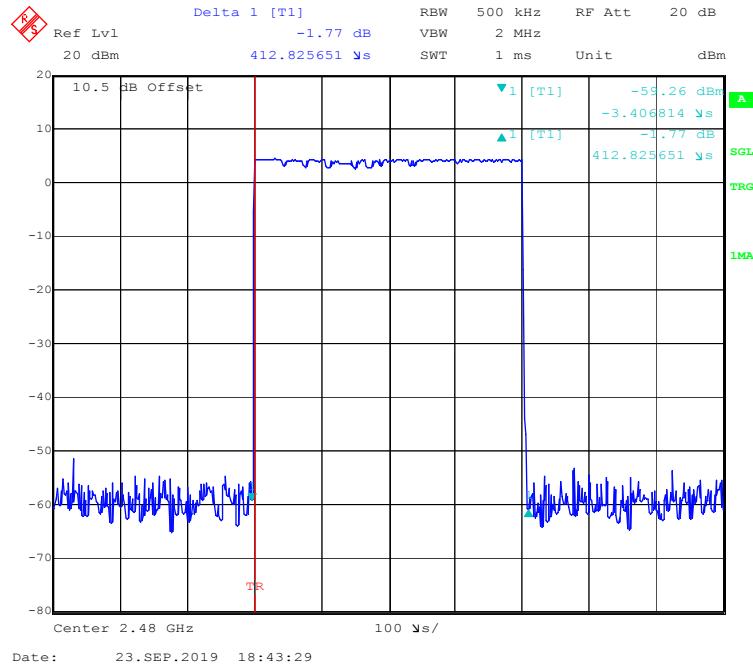
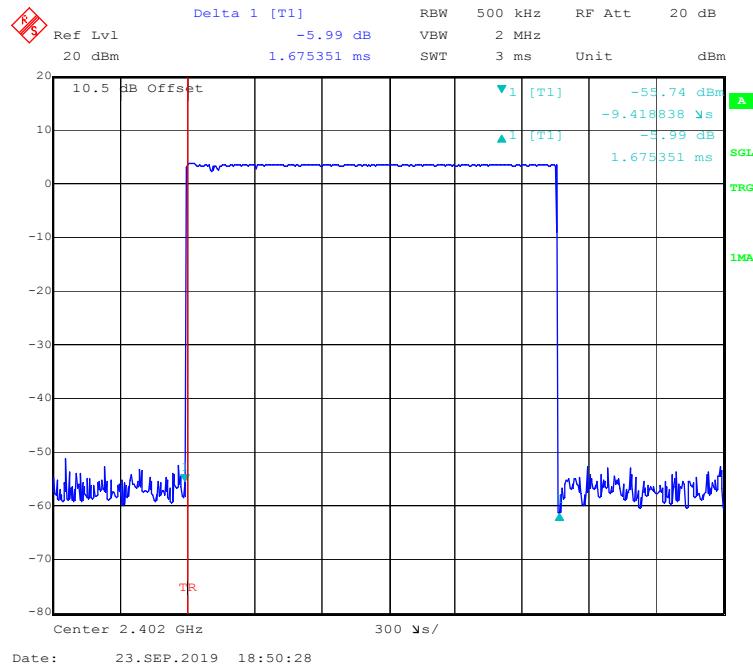
Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

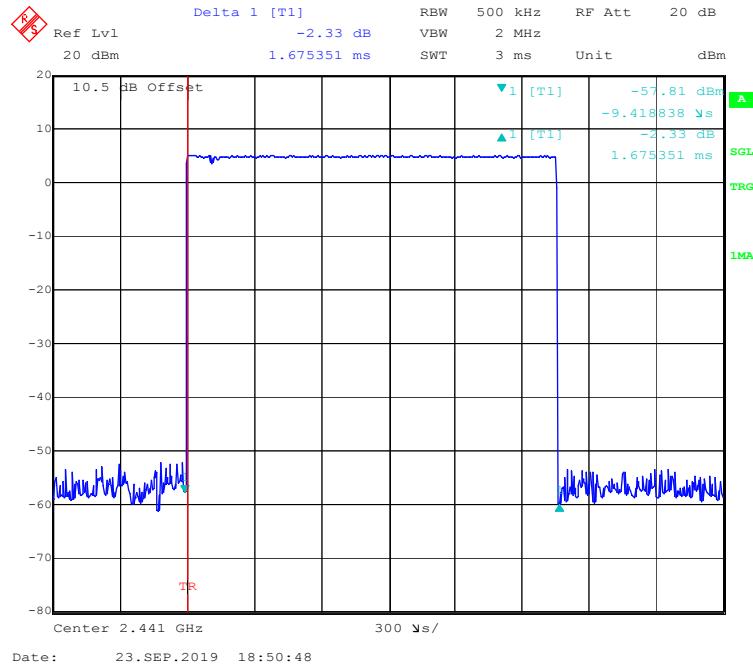
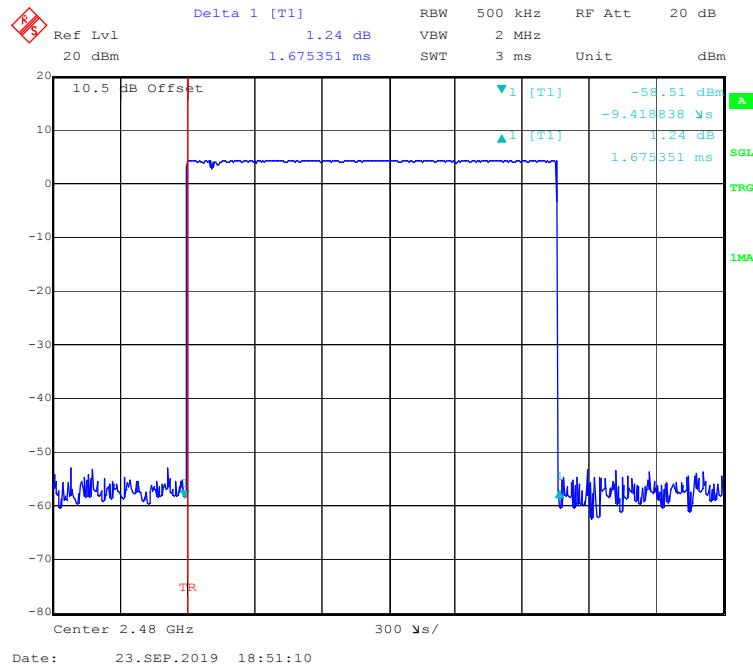
*The testing was performed by Winnie Yang on 2019-09-23.*

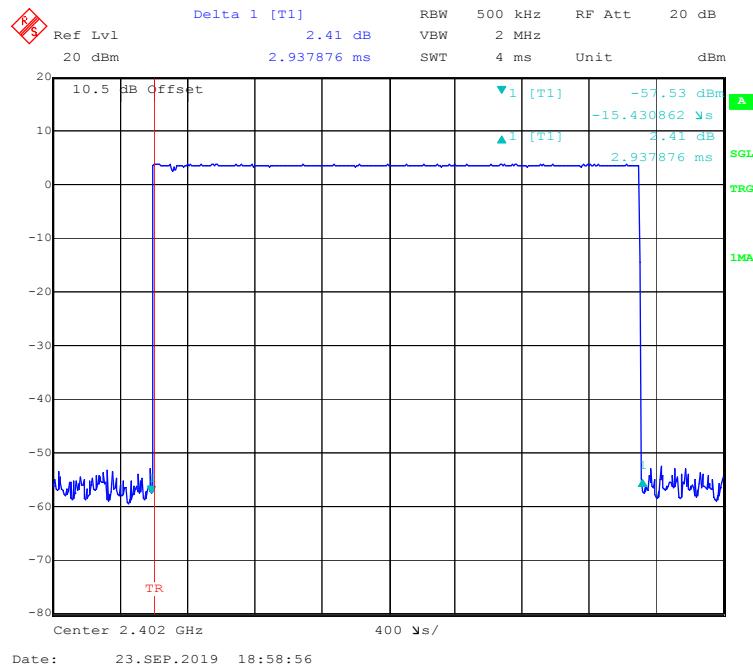
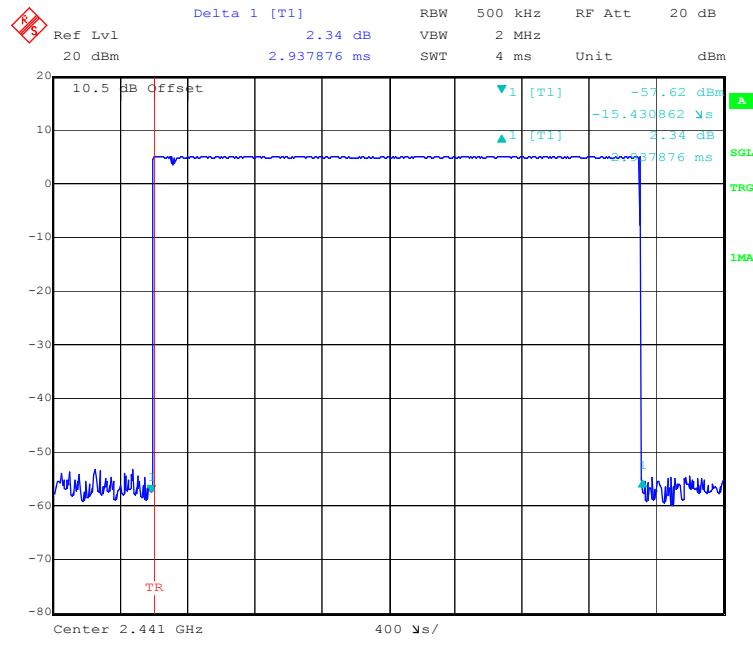
*EUT operation mode: Hopping*

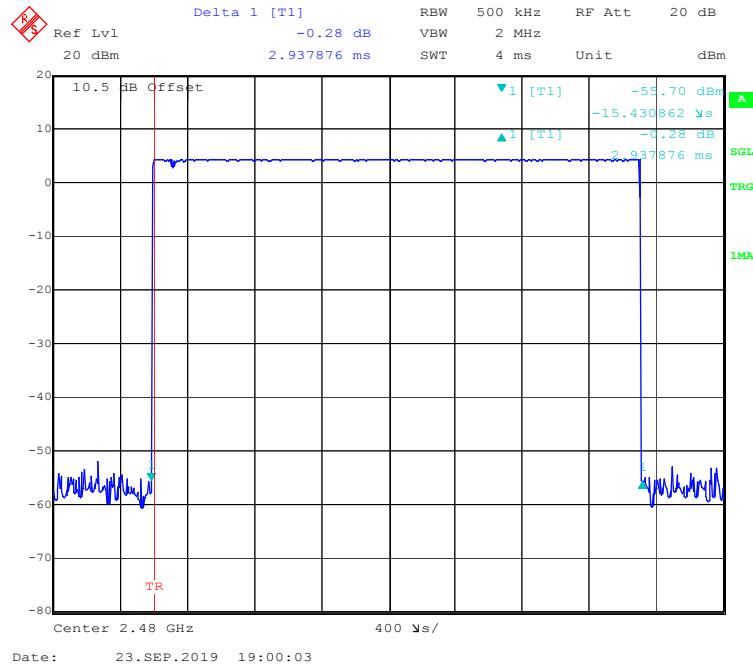
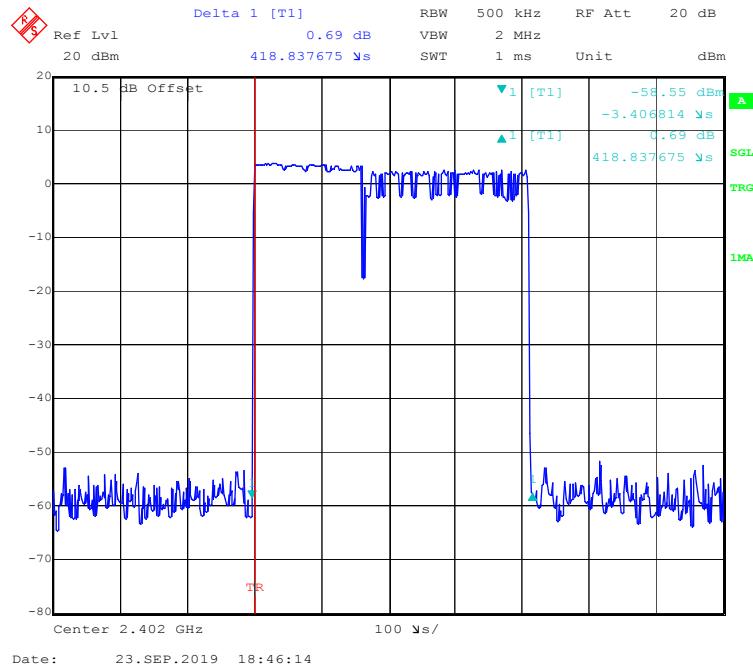
Mode		Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
BDR (GFSK)	DH1	Low	0.415	0.133	0.4	Pass
		Middle	0.415	0.133	0.4	Pass
		High	0.413	0.132	0.4	Pass
	Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S					
	DH3	Low	1.675	0.268	0.4	Pass
		Middle	1.675	0.268	0.4	Pass
		High	1.675	0.268	0.4	Pass
	Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S					
	DH5	Low	2.938	0.313	0.4	Pass
		Middle	2.938	0.313	0.4	Pass
		High	2.938	0.313	0.4	Pass
	Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S					
EDR (π/4-DQPSK)	2DH1	Low	0.419	0.134	0.4	Pass
		Middle	0.421	0.135	0.4	Pass
		High	0.425	0.136	0.4	Pass
	Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S					
	2DH3	Low	1.687	0.270	0.4	Pass
		Middle	1.681	0.269	0.4	Pass
		High	1.681	0.269	0.4	Pass
	Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S					
	2DH5	Low	2.946	0.314	0.4	Pass
		Middle	2.946	0.314	0.4	Pass
		High	2.946	0.314	0.4	Pass
	Note: 2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S					
EDR (8DPSK)	3DH1	Low	0.419	0.134	0.4	Pass
		Middle	0.419	0.134	0.4	Pass
		High	0.421	0.135	0.4	Pass
	Note: 3 DH1:Dwell time = Pulse time*(1600/2/79)*31.6S					
	3DH3	Low	1.687	0.270	0.4	Pass
		Middle	1.687	0.270	0.4	Pass
		High	1.687	0.270	0.4	Pass
	Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S					
	3DH5	Low	2.954	0.315	0.4	Pass
		Middle	2.954	0.315	0.4	Pass
		High	2.946	0.314	0.4	Pass
	Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S					

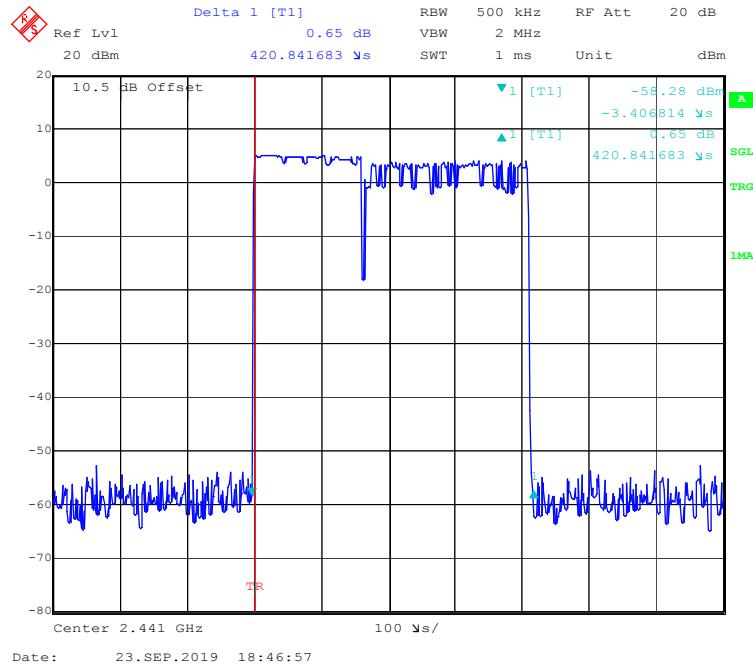
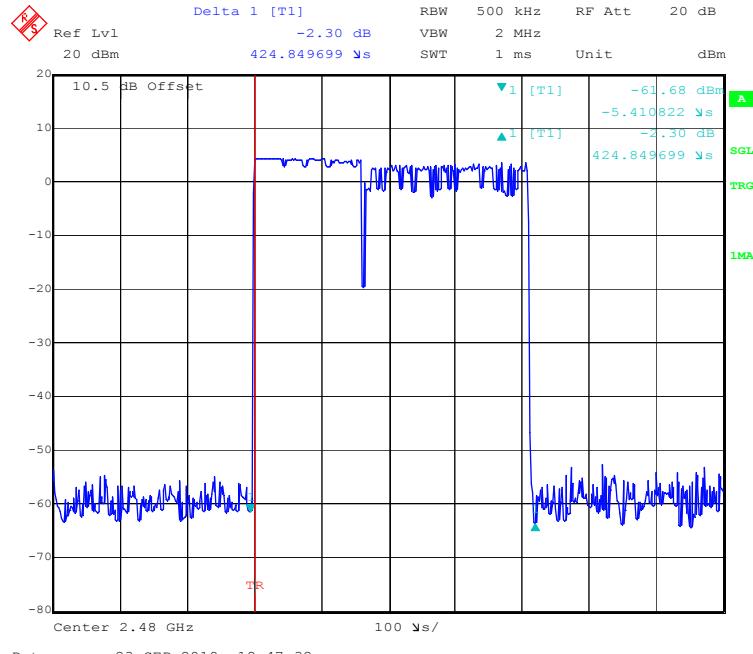
**BDR (GFSK): Pulse time, Low Channel, DH1****BDR (GFSK): Pulse time, Middle Channel, DH1**

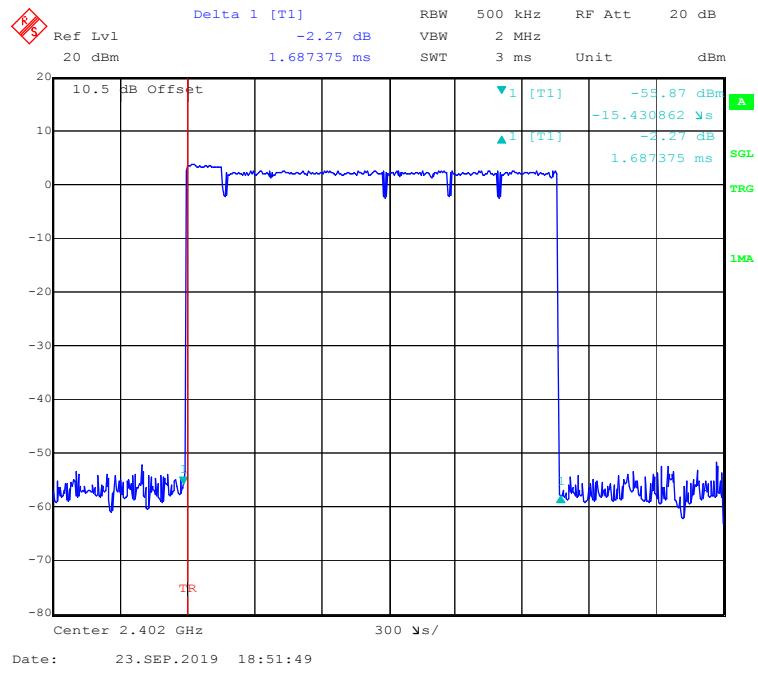
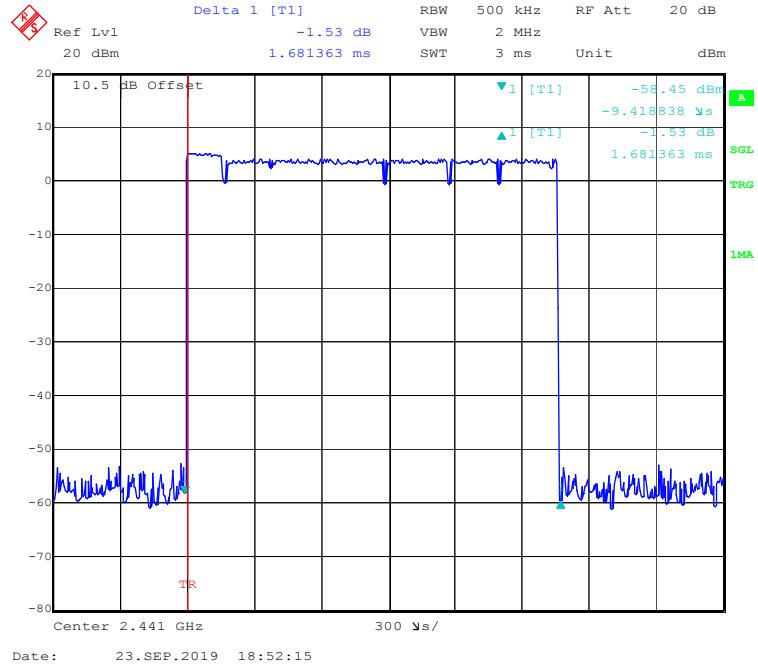
**BDR (GFSK): Pulse time, High Channel, DH1****BDR (GFSK): Pulse time, Low Channel, DH3**

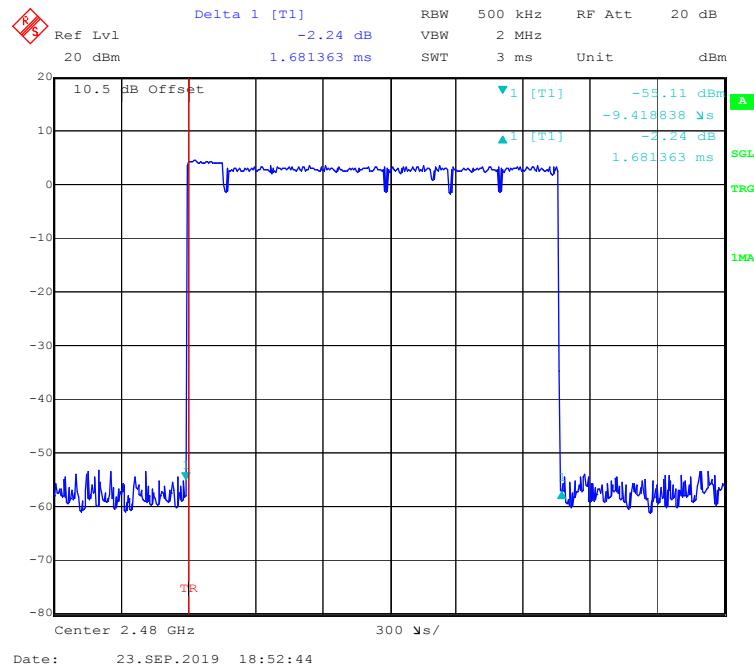
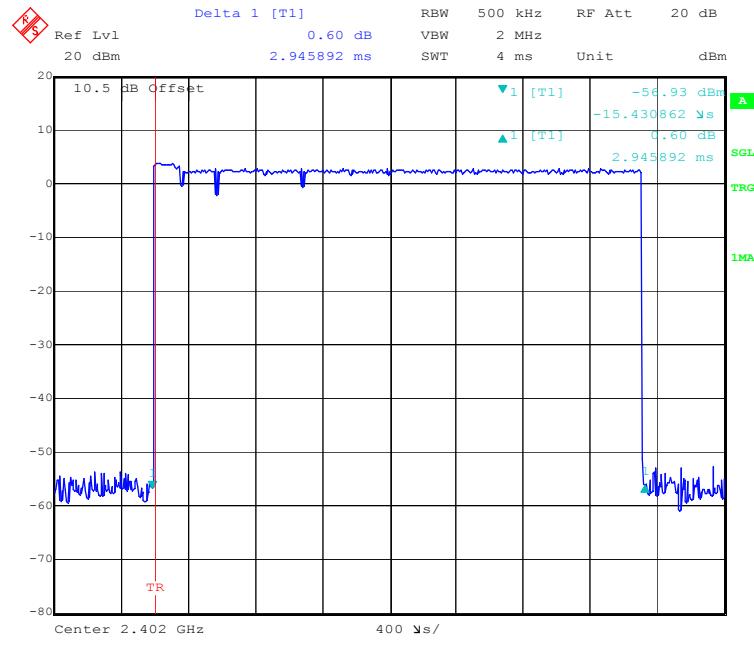
**BDR (GFSK): Pulse time, Middle Channel, DH3****BDR (GFSK): Pulse time, High Channel, DH3**

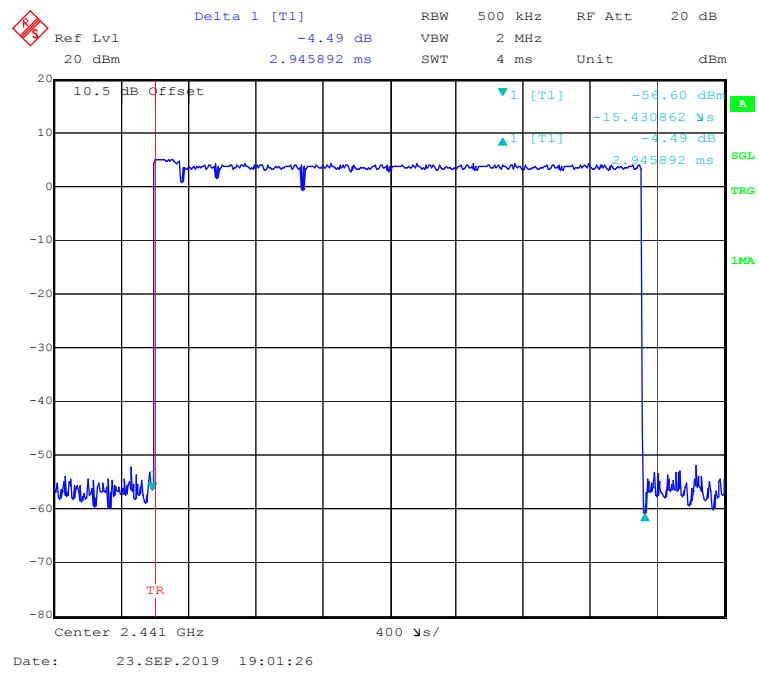
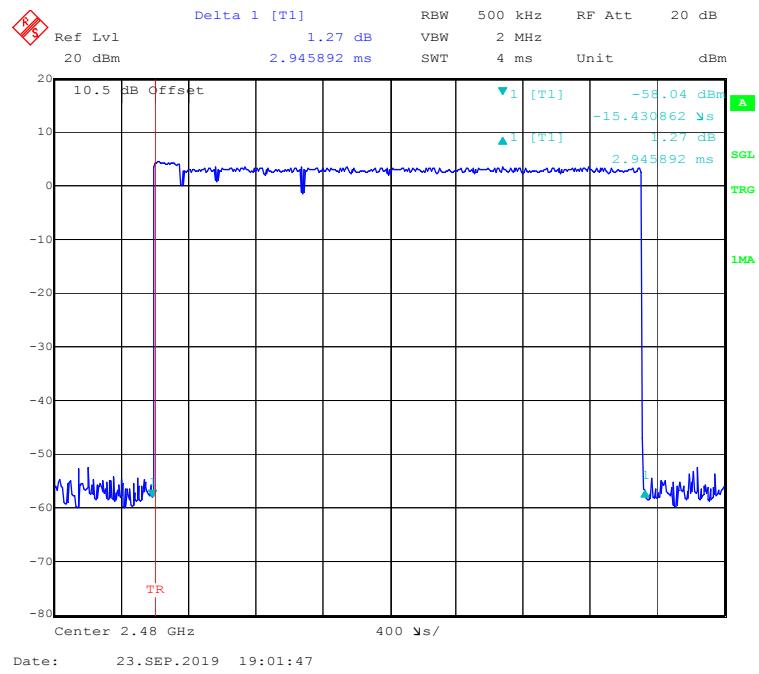
**BDR (GFSK): Pulse time, Low Channel, DH5****BDR (GFSK): Pulse time, Middle Channel, DH5**

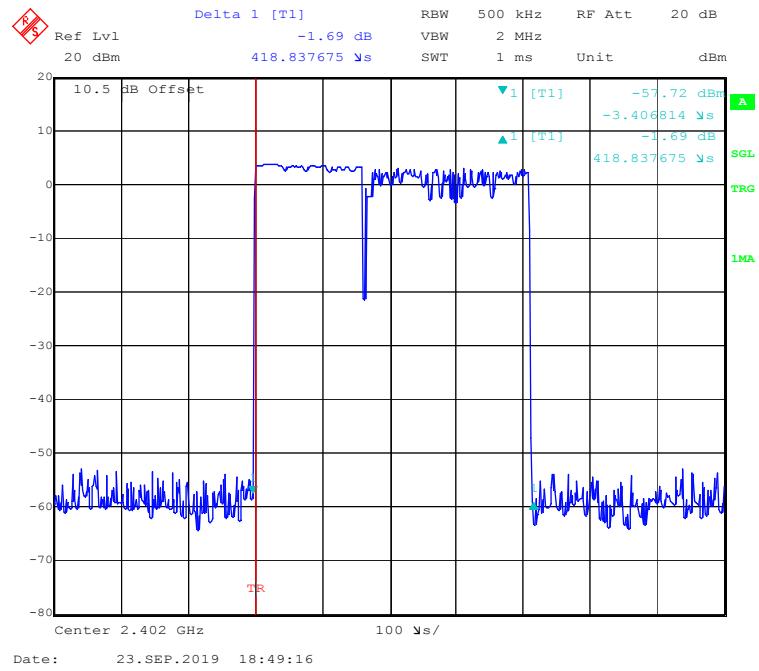
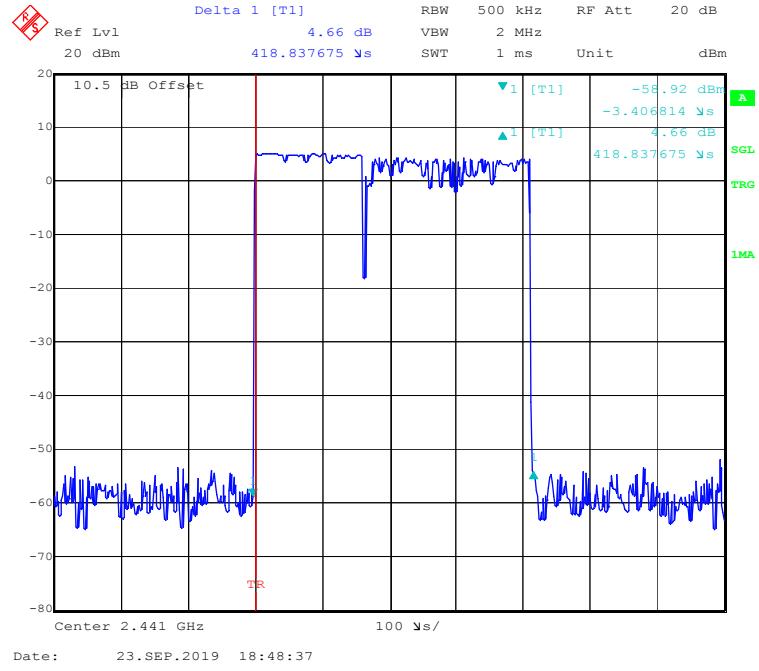
**BDR (GFSK): Pulse time, High Channel, DH5****EDR ( $\pi/4$ -DQPSK): Pulse time, Low Channel, 2DH1**

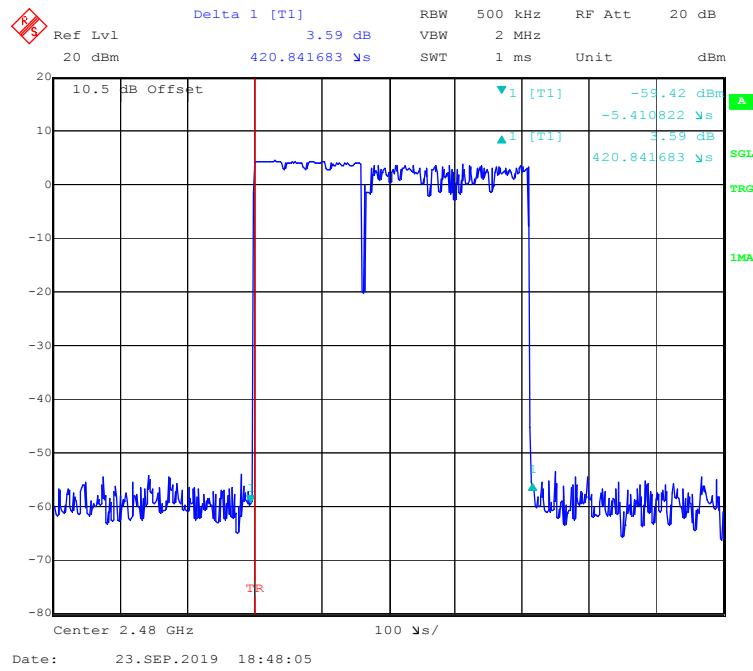
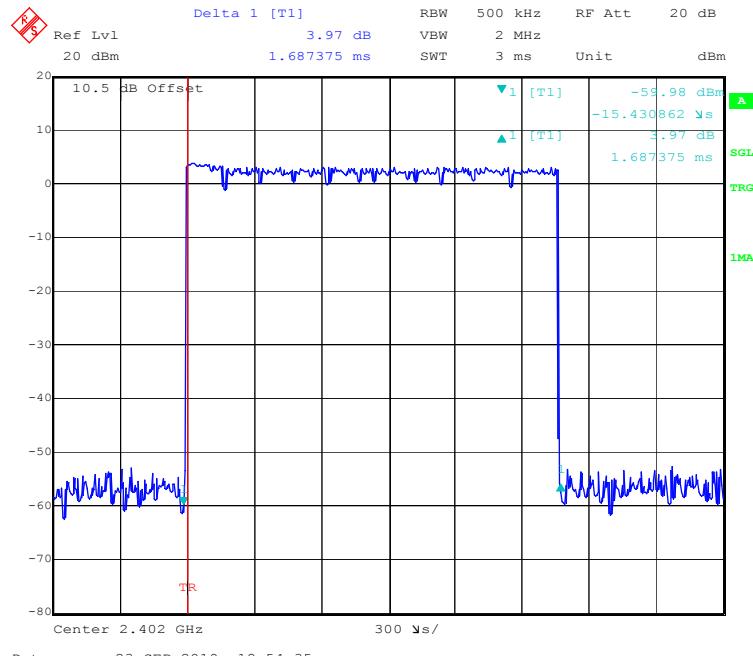
**EDR ( $\pi/4$ -DQPSK):Pulse time, Middle Channel, 2DH1****EDR ( $\pi/4$ -DQPSK):Pulse time, High Channel, 2DH1**

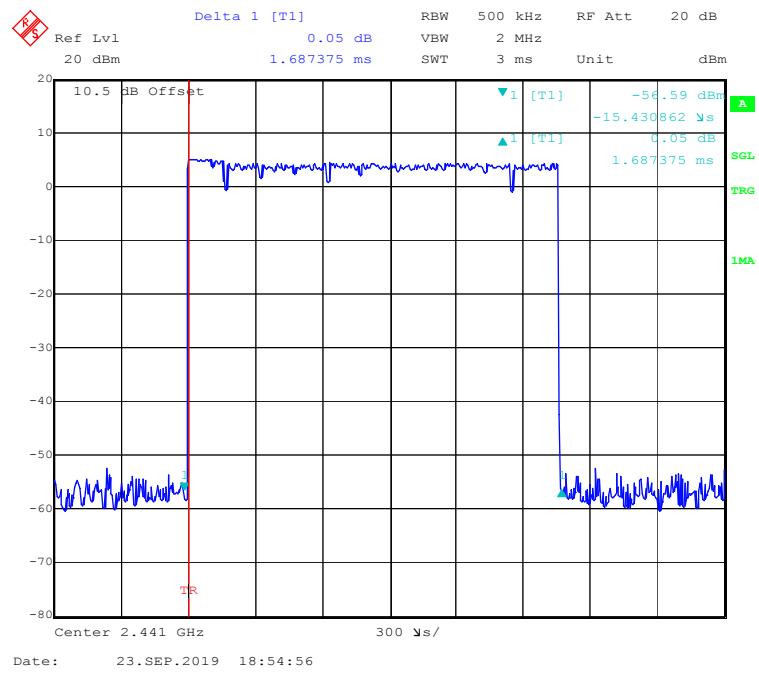
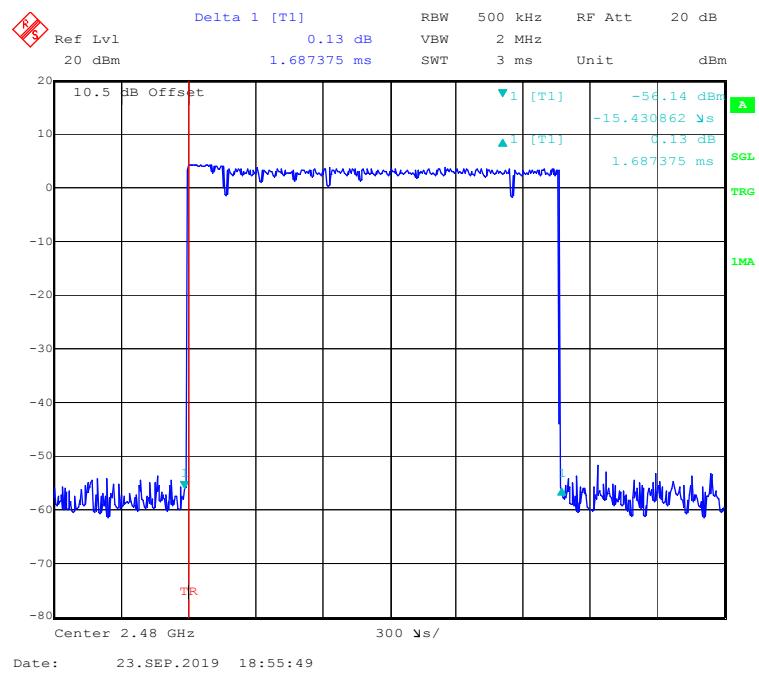
**EDR ( $\pi/4$ -DQPSK):Pulse time, Low Channel, 2DH3****EDR ( $\pi/4$ -DQPSK):Pulse time, Middle Channel, 2DH3**

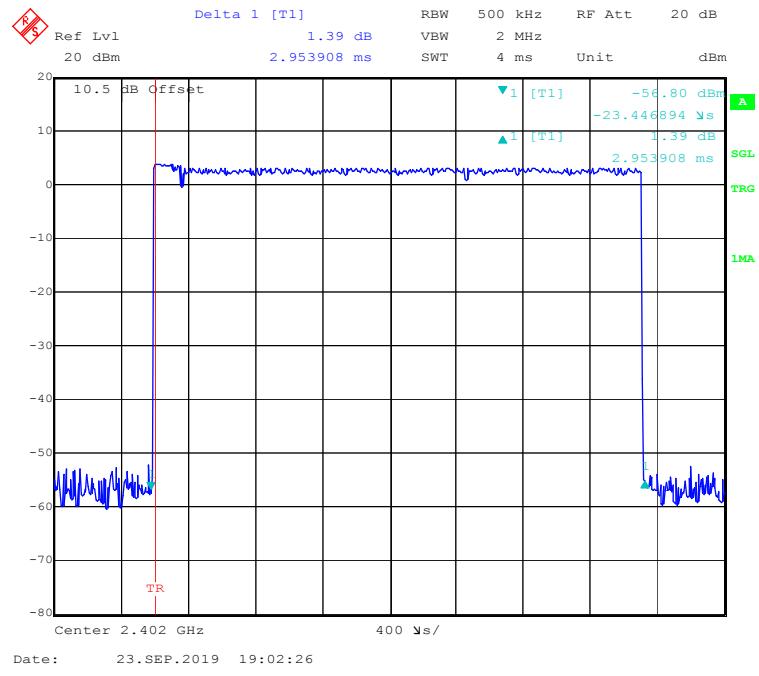
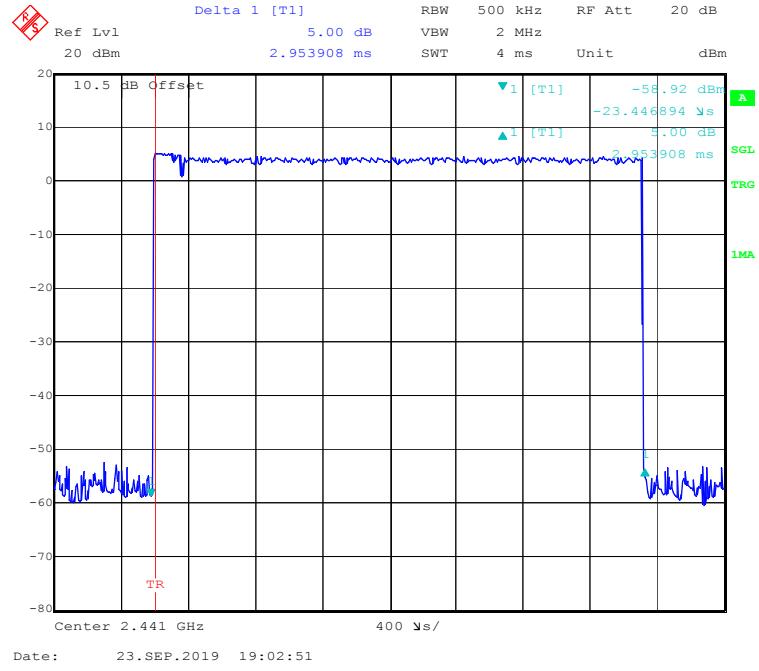
**EDR ( $\pi/4$ -DQPSK):Pulse time, High Channel, 2DH3****EDR ( $\pi/4$ -DQPSK):Pulse time, Low Channel, 2DH5**

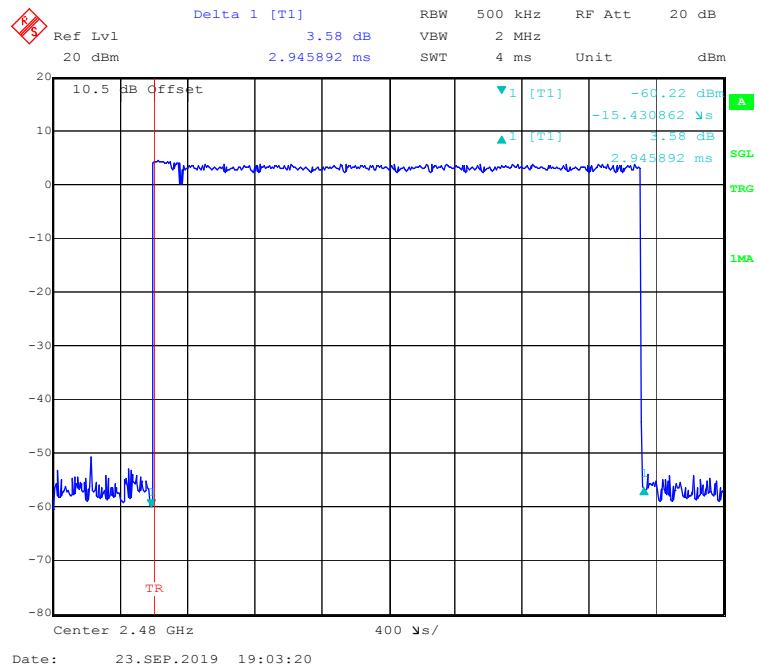
**EDR ( $\pi/4$ -DQPSK):Pulse time, Middle Channel, 2DH5****EDR ( $\pi/4$ -DQPSK):Pulse time, High Channel, 2DH5**

**EDR (8DPSK): Pulse time, Low Channel, 3DH1****EDR (8DPSK): Pulse time, Middle Channel, 3DH1**

**EDR (8DPSK): Pulse time, High Channel, 3DH1****EDR (8DPSK): Pulse time, Low Channel, 3DH3**

**EDR (8DPSK): Pulse time, Middle Channel, 3DH3****EDR (8DPSK): Pulse time, High Channel, 3DH3**

**EDR (8DPSK): Pulse time, Low Channel, 3DH5****EDR (8DPSK): Pulse time, Middle Channel, 3DH5**

**EDR (8DPSK): Pulse time, High Channel, 3DH5**

## FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

### Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### Test Procedure

a. Use the following spectrum analyzer settings:

- 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 2) RBW > 20 dB bandwidth of the emission being measured.
- 3) VBW  $\geq$  RBW.
- 4) Sweep: Auto.
- 5) Detector function: Peak.
- 6) Trace: Max hold.

b. Allow trace to stabilize.

c. Use the marker-to-peak function to set the marker to the peak of the emission.

d. The indicated level is the peak output power, after any corrections for external attenuators and cables.

e. A plot of the test results and setup description shall be included in the test report.

### Test Data

#### Environmental Conditions

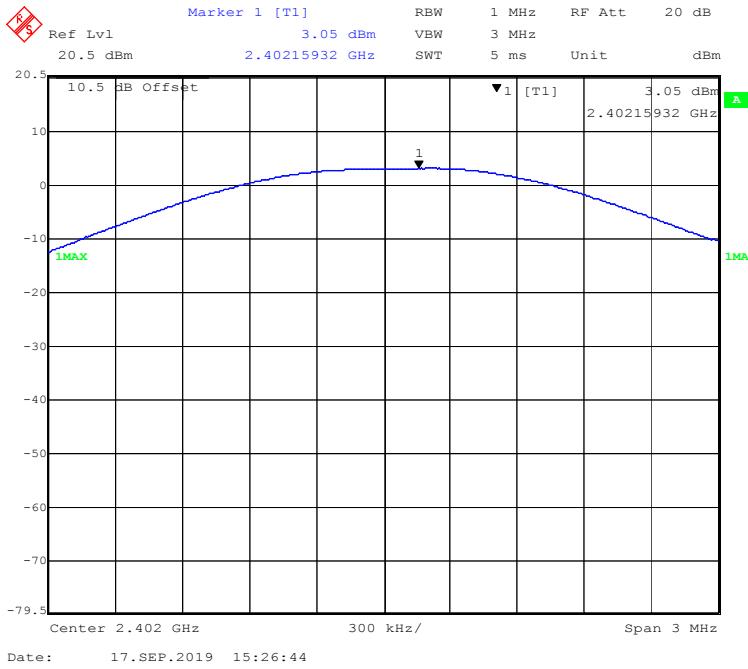
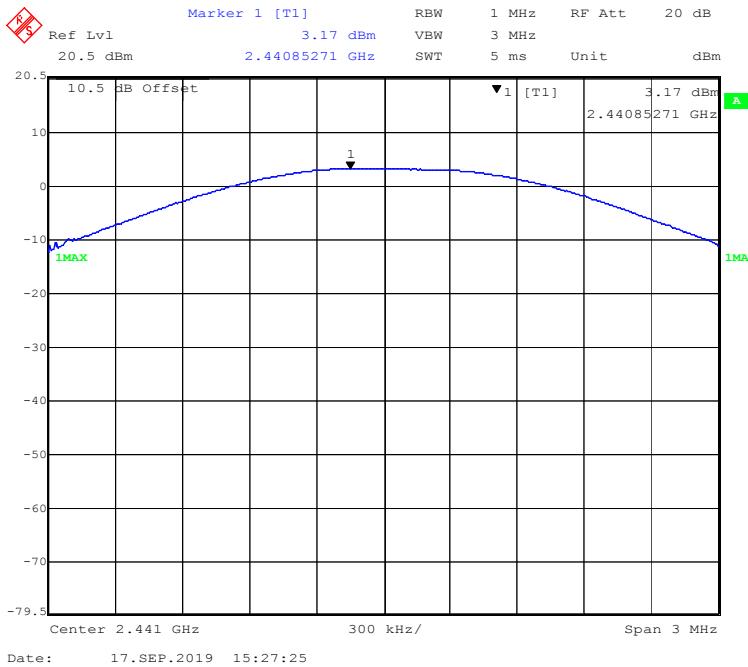
Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

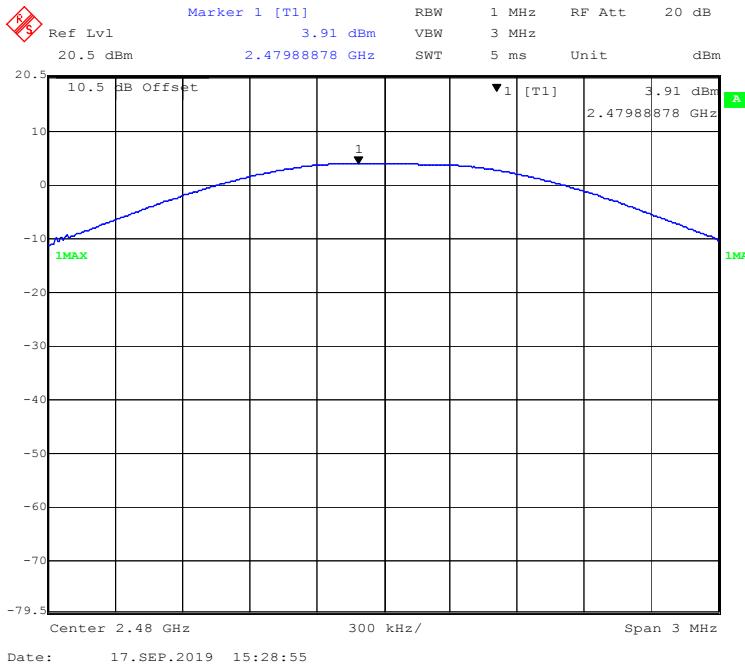
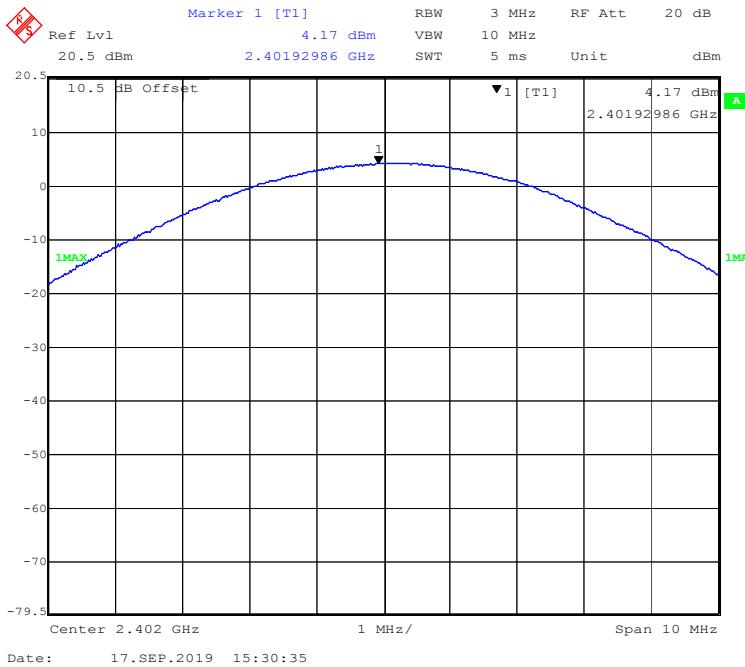
The testing was performed by Winnie Yang on 2019-09-17.

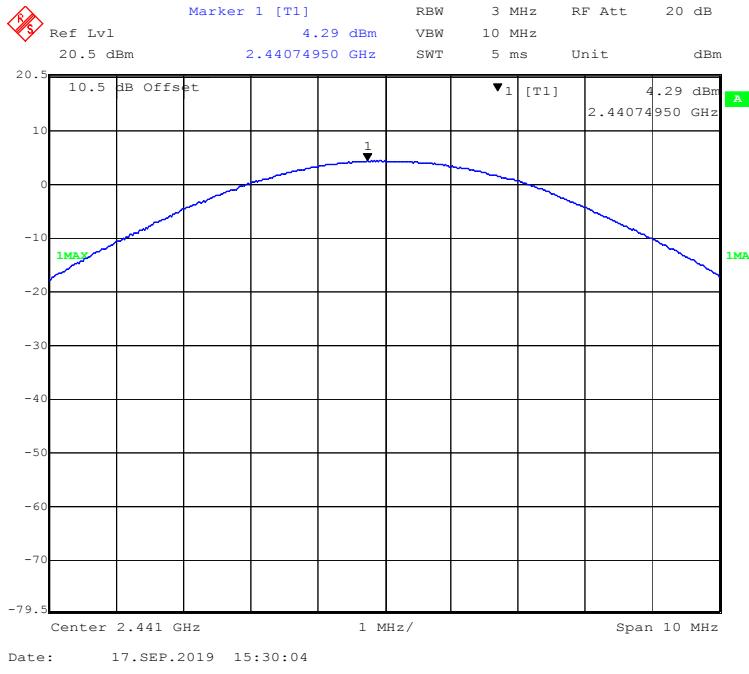
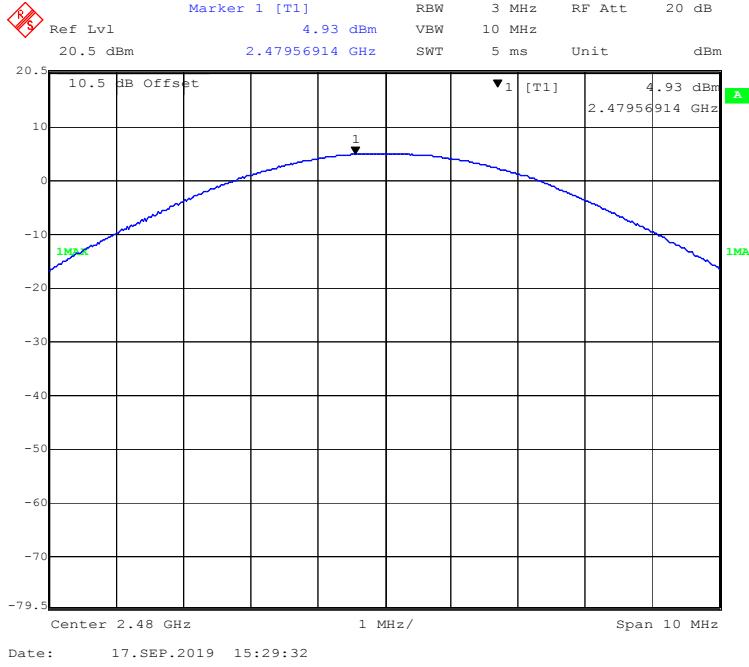
EUT operation mode: Transmitting

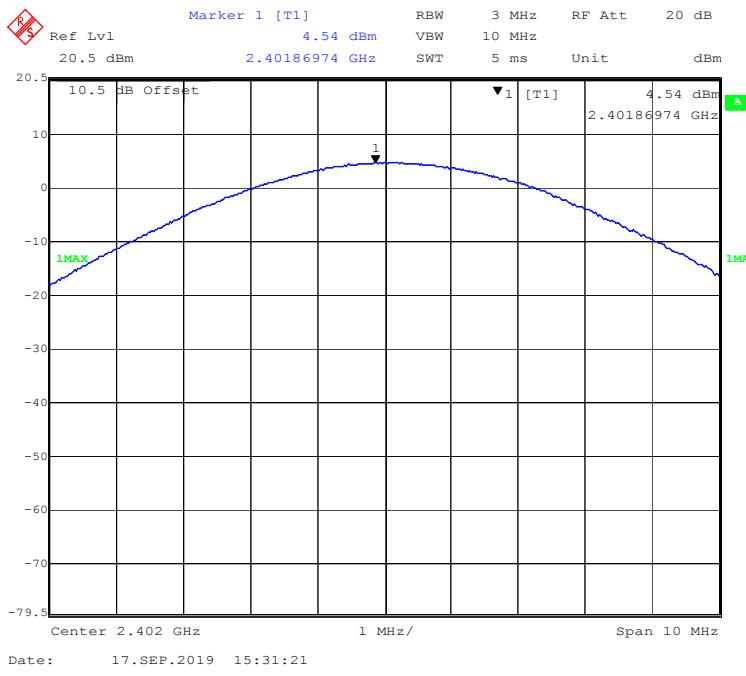
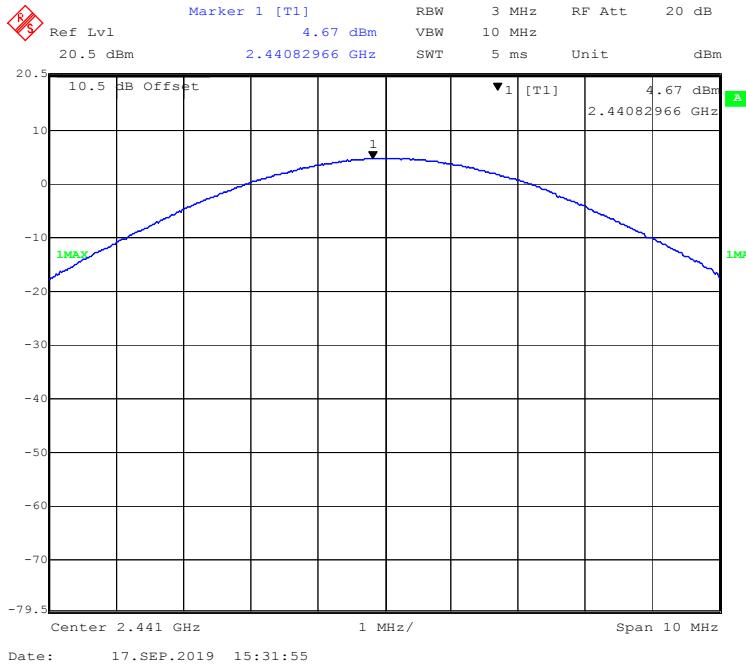
Test Result: Compliant.

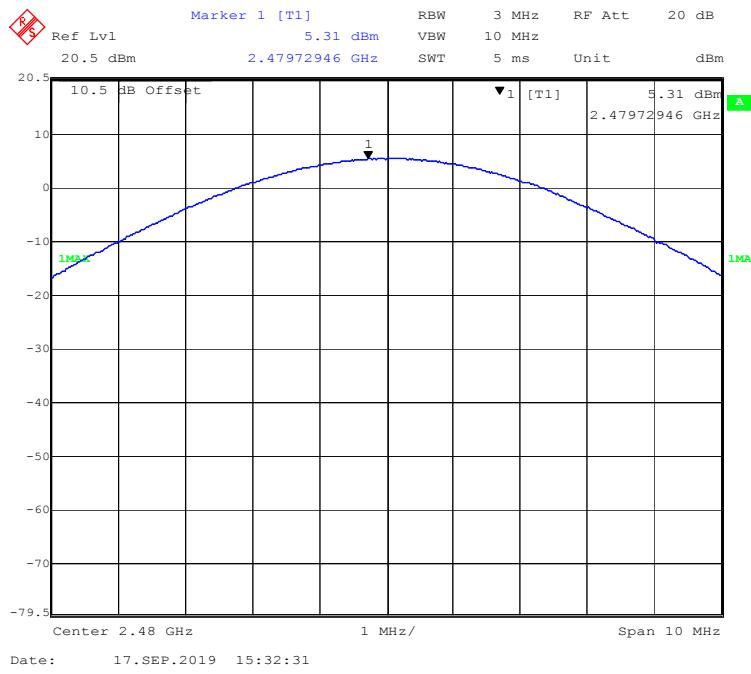
Mode	Frequency (MHz)	Output Power		Limit (mW)
		(dBm)	(mW)	
<b>BDR (GFSK)</b>	2402	3.05	2.02	125
	2441	3.17	2.07	125
	2480	3.91	2.46	125
<b>EDR (<math>\pi/4</math>-DQPSK)</b>	2402	4.17	2.61	125
	2441	4.29	2.69	125
	2480	4.93	3.11	125
<b>EDR (8DPSK)</b>	2402	4.54	2.84	125
	2441	4.67	2.93	125
	2480	5.31	3.40	125

**BDR (GFSK): 2402MHz****BDR (GFSK): 2441MHz**

**BDR (GFSK): 2480MHz****EDR( $\pi/4$ -DQPSK): 2402MHz**

**EDR( $\pi/4$ -DQPSK): 2441MHz****EDR( $\pi/4$ -DQPSK): 2480MHz**

**EDR(8DPSK): 2402MHz****EDR(8DPSK): 2441MHz**

**EDR(8DPSK): 2480MHz**

## FCC §15.247(d) - BAND EDGES TESTING

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### Test Data

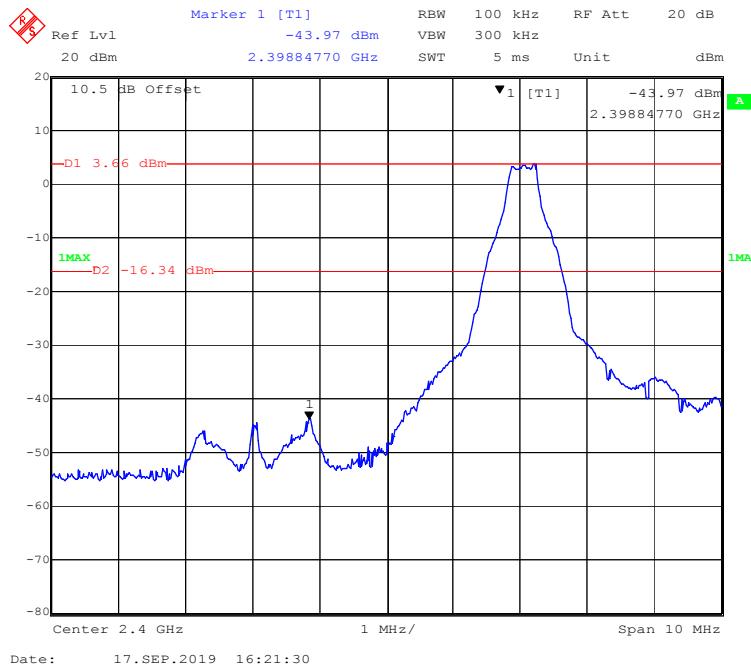
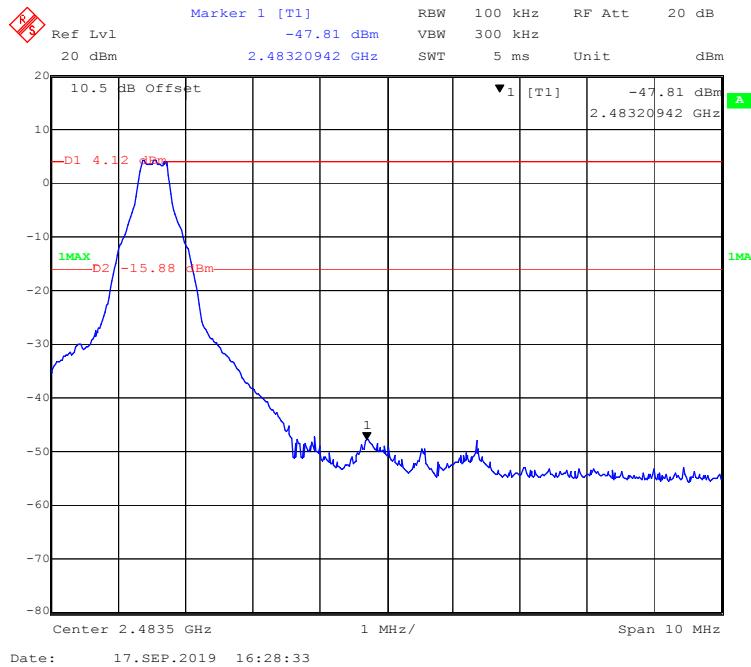
#### Environmental Conditions

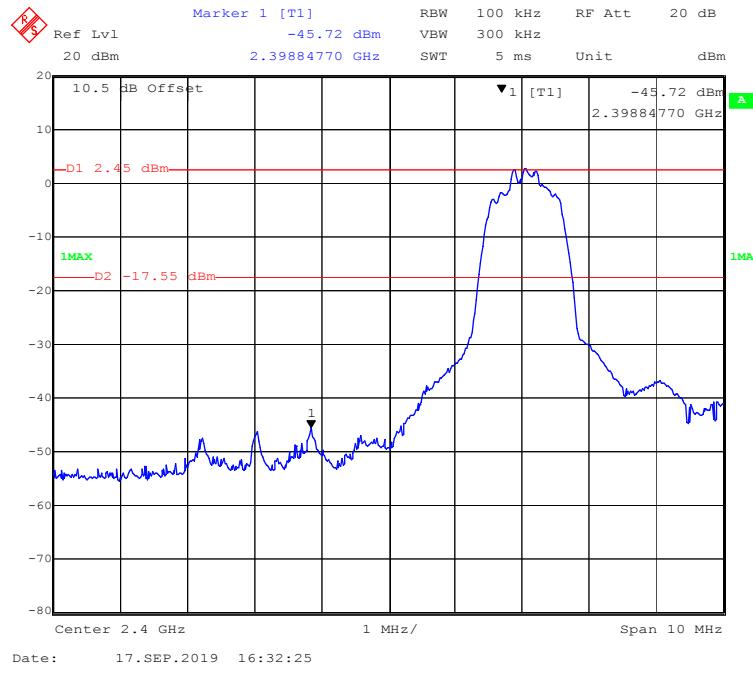
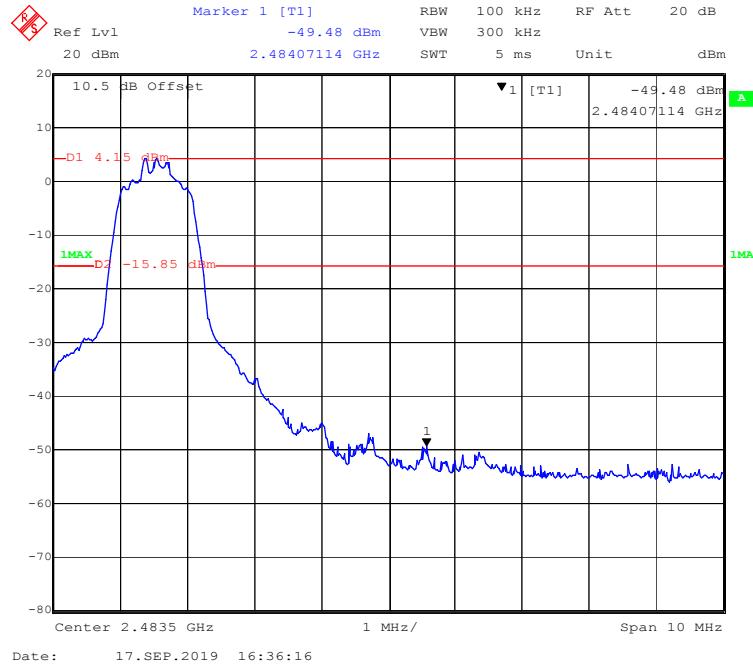
Temperature:	23.2-24.5 °C
Relative Humidity:	49-50 %
ATM Pressure:	101.3-101.6 kPa

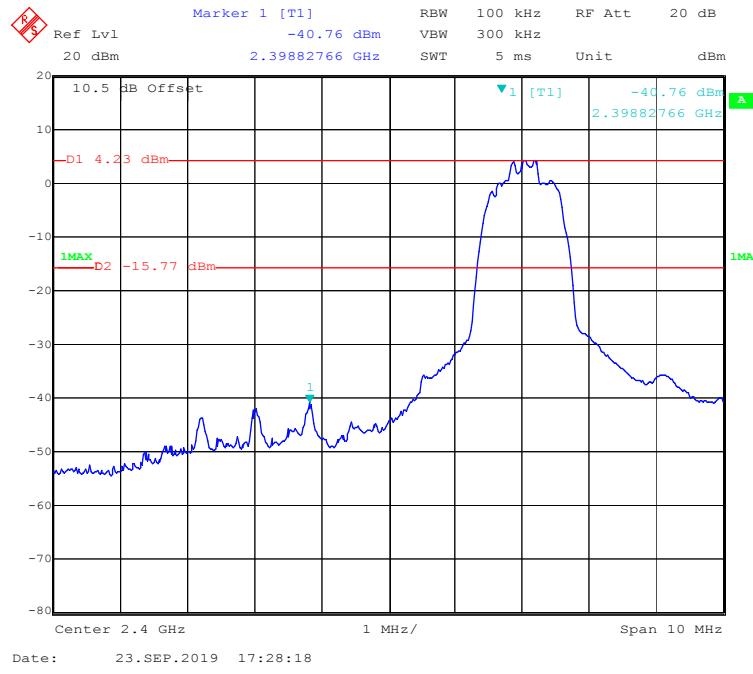
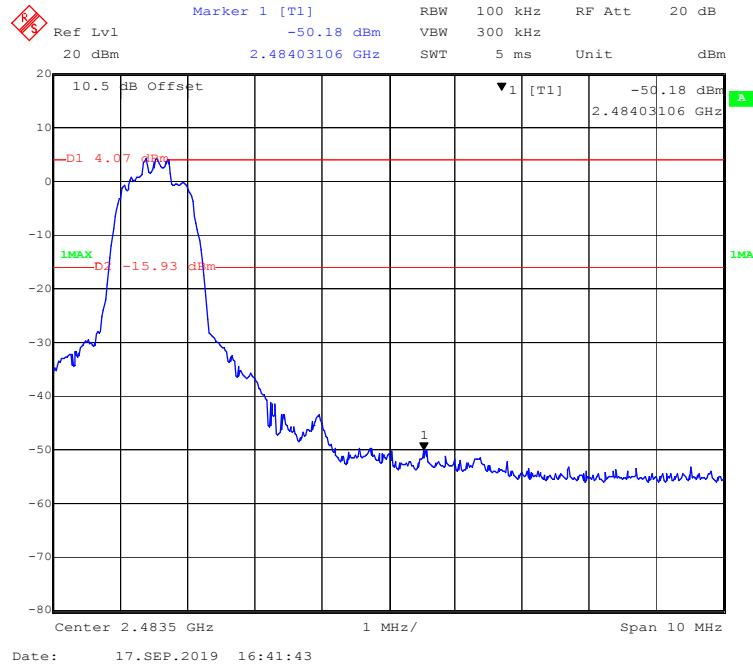
The testing was performed by Winnie Yang from 2019-09-17 to 2019-09-23.

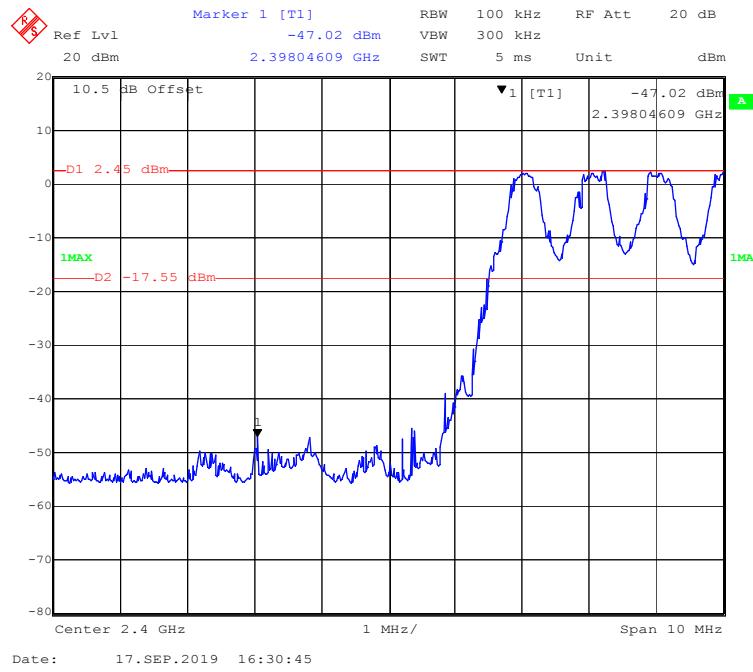
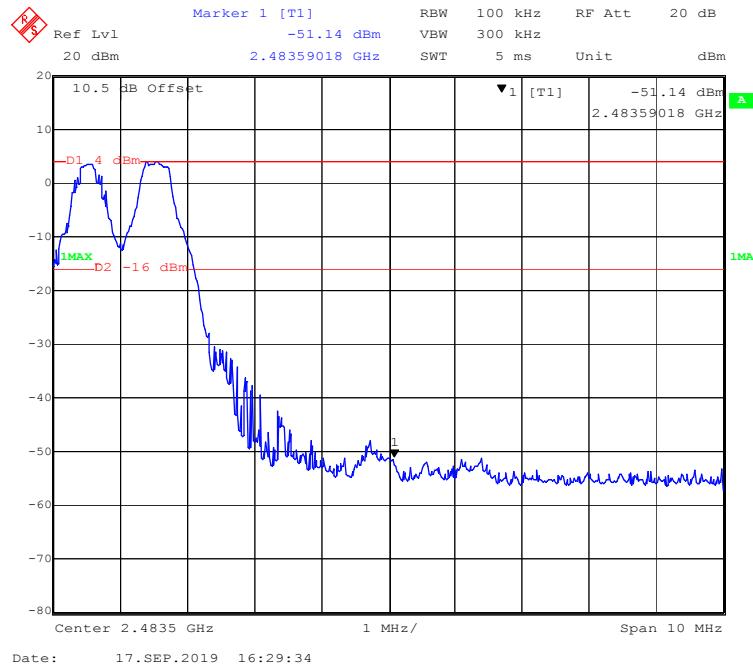
EUT operation mode: Transmitting & Hopping

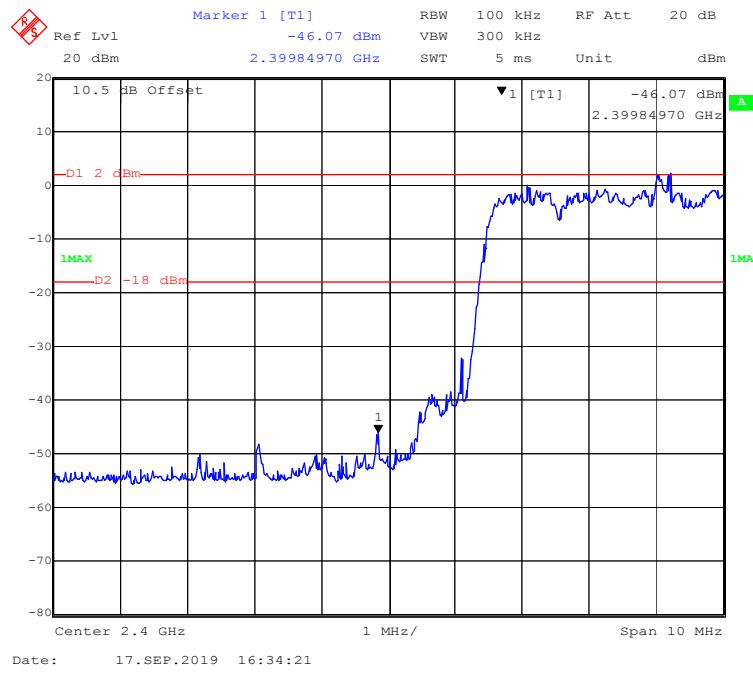
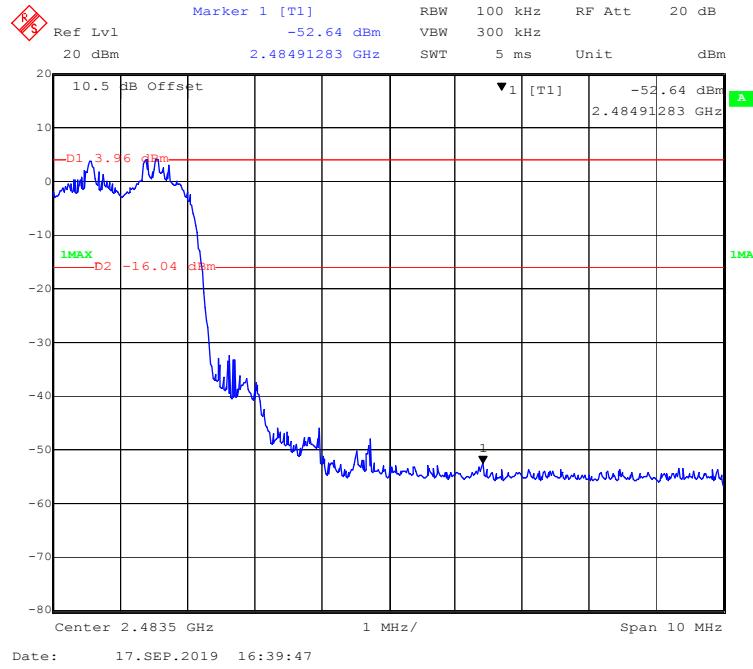
Test Result: Compliant.

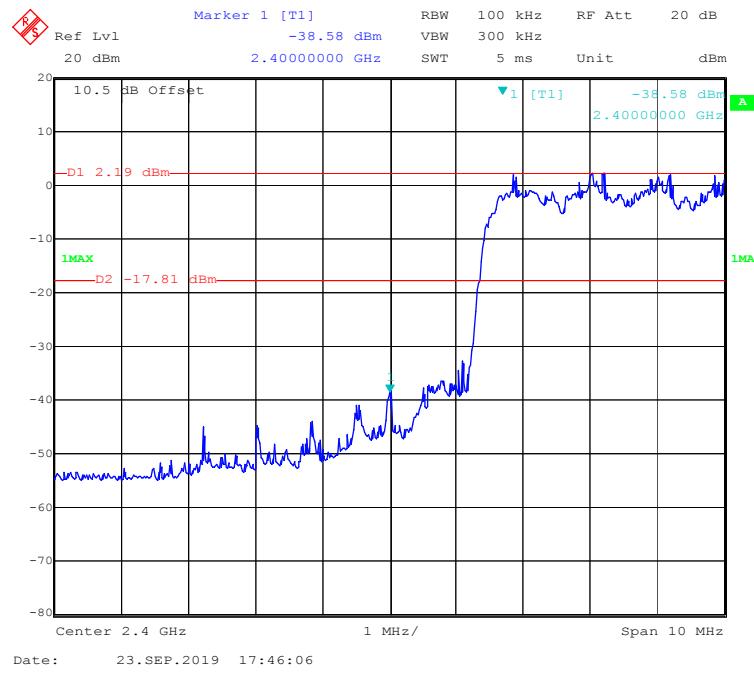
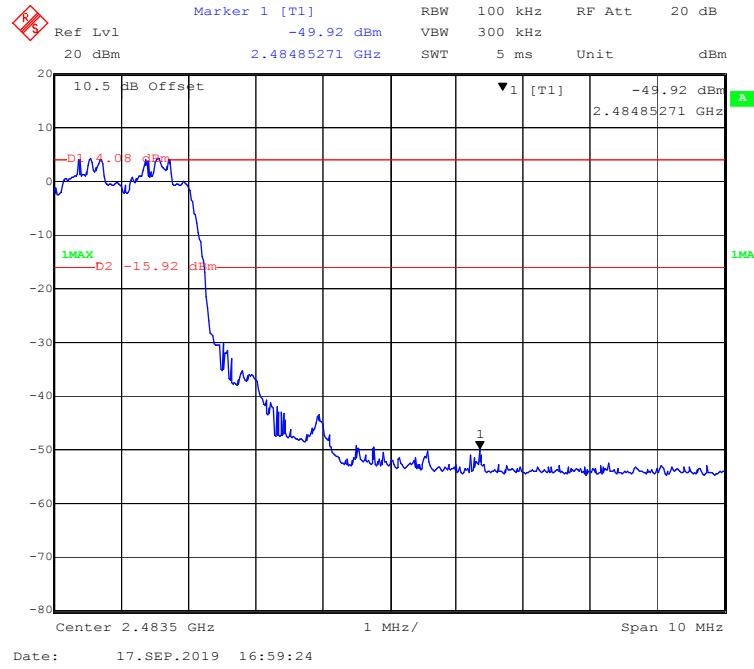
**Band Edge****BDR (GFSK): Left Side****BDR (GFSK): Right Side**

**EDR ( $\pi/4$ -DQPSK): Left Side****EDR ( $\pi/4$ -DQPSK): Right Side**

**EDR (8DPSK): Left Side****EDR (8DPSK): Right Side**

**BDR (GFSK): Left Side - Hopping****BDR (GFSK): Right Side- Hopping**

**EDR ( $\pi/4$ -DQPSK): Left Side- Hopping****EDR ( $\pi/4$ -DQPSK): Right Side- Hopping**

**EDR (8DPSK): Left Side- Hopping****EDR (8DPSK): Right Side- Hopping****\*\*\*\*\* END OF REPORT \*\*\*\*\***