

FCC Radio Test Report

FCC ID : 2AHIS-VH02R03
Equipment : Vayyar Home
Brand Name : Vayyar
Model Name : Vayyar Home
Applicant : Vayyar Imaging Ltd.
26 Shabazi St., Yehud 56230000, Israel
Manufacturer : XAVi Technologies Corporation
22F., No.69, Sec. 2, Guangfu Rd., Sanchong Dist.,
New Taipei City 241, Taiwan (R.O.C.)
Standard : 47 CFR FCC Part 15.247

The product was received on Jul. 21, 2020, and testing was started from Jul. 24, 2020 and completed on Jun. 05, 2021. We, SPORTON INTERNATIONAL INC. Hsinhua Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Hsinhua Laboratory, the test report shall not be reproduced except in full.



Approved by: Allen Lin

SPORTON INTERNATIONAL INC. Hsinhua Laboratory

No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)



Table of Contents

HISTORY OF THIS TEST REPORT3

SUMMARY OF TEST RESULT4

1 GENERAL DESCRIPTION5

1.1 Information.....5

1.2 Testing Applied Standards7

1.3 Testing Location Information7

1.4 Measurement Uncertainty7

2 TEST CONFIGURATION OF EUT.....8

2.1 Test Channel Mode8

2.2 The Worst Case Measurement Configuration9

2.3 Support Equipment.....10

2.4 Test Setup Diagram11

3 TRANSMITTER TEST RESULT12

3.1 AC Power-line Conducted Emissions12

3.2 DTS Bandwidth.....14

3.3 Maximum Conducted Output Power15

3.4 Power Spectral Density17

3.5 Emissions in Non-restricted Frequency Bands18

3.6 Emissions in Restricted Frequency Bands.....19

4 TEST EQUIPMENT AND CALIBRATION DATA.....23

APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS

APPENDIX B. TEST RESULTS OF DTS BANDWIDTH

APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER

APPENDIX D. TEST RESULTS OF POWER SPECTRAL DENSITY

APPENDIX E. TEST RESULTS OF EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

APPENDIX F. TEST RESULTS OF EMISSIONS IN RESTRICTED FREQUENCY BANDS

APPENDIX G. TEST PHOTOS

PHOTOGRAPHS OF EUT V01



History of this test report

Report No.	Version	Description	Issued Date
FR052115-05AL	01	Initial issue of report	Jul. 29, 2021



Summary of Test Result

Report Clause	Ref.Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and explanations:
None

Reviewed by: Sam Tsai

Report Producer: Amber Chiu



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number
2400-2483.5	LE	2402-2480	0-39 [40]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	BT-LE(1Mbps)	1.0	1TX

Note:

- ♦ Bluetooth LE uses a GFSK (1Mbps) modulation.
- ♦ BWch is the nominal channel bandwidth.

1.1.2 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector
1	Chilisin Electronics Corp.	BTCA0032160 9002G4F	Chip antenna	N/A
2	Walsin (Inpaq)	ACM0-3216-A1-CC-S-P1	Chip antenna	N/A

Ant.	Gain (dBi)	
	2.4G	BT
1	3.32	3.32
2	1.54	1.54

Note 1: EUT can match with above antennas for using. Higher gain of antenna was used to perform the worst configuration and result of that was recorded as the final test result.

For 2.4GHz function:

For IEEE 802.11 b/g/n mode (1TX/1RX)

Ant. 1 and Ant. 2 could be used as transmitting/receiving antenna.

For BT function:

For IEEE 802.15.1 Bluetooth mode (1TX/1RX)

Ant. 1 and Ant. 2 could be used as transmitting/receiving antenna.



1.1.3 EUT Information

Operational Condition	
EUT Power Type	From AC Adapter
EUT Function	<input checked="" type="checkbox"/> Point-to-multipoint <input type="checkbox"/> Point-to-point
Type of EUT	
<input checked="" type="checkbox"/> Stand-alone	
<input type="checkbox"/> Combined (EUT where the radio part is fully integrated within another device)	
Combined Equipment - Brand Name / Model No.:	...
<input type="checkbox"/> Plug-in radio (EUT intended for a variety of host systems)	
Host System - Brand Name / Model No.:	...
<input type="checkbox"/> Other:	

1.1.4 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
BT-LE(1Mbps)	0.783	1.06	2.094m	1k

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF:

- ♦ KDB 558074 D01 v05r02
- ♦ KDB 414788 D01 v01r01

1.3 Testing Location Information

Test Lab. : Sporton International Inc. Hsinhua Laboratory				
<input checked="" type="checkbox"/>	Hsinhua (TAF: 3785)	ADD: No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)		
		TEL: 886-3-327-3456	FAX: 886-3-327-0973	
Test site Designation No. TW3785 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Edward Wang	24.5~25.5°C / 58~63%	05/Jun/2021
RF Conducted	TH06-HY	Raven Chien	22.4~23.8°C / 54~60%	27/Jul/2020~ 10/Aug/2020
<input checked="" type="checkbox"/>	Wen 33rd.St. (TAF: 3785)	ADD: No.14-1, Ln. 19, Wen 33rd St., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)		
		TEL: 886-3-318-0787	FAX: 886-3-318-0287	
Test site Designation No. TW0008 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
Radiated (above 1GHz)	03CH09-HY	Daniel Hsu	20.1~26.9°C / 53~61%	24/Jul/2020~ 11/Aug/2020
Radiated (below 1GHz)	03CH09-HY	Daniel Hsu	20.3~26.5°C / 51~60%	04/Jun/2021

Laboratory number TAF 3785 is a spin-off from the original Laboratory number TAF 1190.

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	0.9 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.0 dB	Confidence levels of 95%
Temperature	0.41 °C	Confidence levels of 95%
Humidity	3.4 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Test Software	espRFTool1.1.0
----------------------	----------------




Mode	Power Setting
BT-LE(1Mbps)	-
2402MHz	8
2440MHz	8
2480MHz	8

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	Adapter mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains

Note: From Sporton Project No.:FR052115-01AL.

The Worst Case Mode for Following Conformance Tests			
Tests Item	Emissions in Restricted Frequency Bands		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
Operating Mode < 1GHz	CTX		
1	Adapter mode		
Operating Mode > 1GHz	CTX		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT			V

Note: From Sporton Project No.:FR052115-01AL. (above 1GHz)

2.3 Support Equipment

Support Equipment – AC Conduction					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	USB Cable	Fujiei	US0090	-	Note 1
2	VTREE USB-CONSULE BOARD	Xavi	V0.1-200515	-	Note 1
3	Type C to USB	DIEN	DN-MQ38	-	Note 1
4	Adapter	RUIDIR	NB-A520A USBA-1	-	Note 1

Note 1: Provided by Customer.


Support Equipment – Conducted					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	Notebook	DELL	E5410	-	-
2	Adapter for NB	DELL	HA65NM130	-	-
3	USB Cable	Fujiei	US0090	-	Note 1
4	VTREE USB-CONSULE BOARD	Xavi	V0.1-200515	-	Note 1

Note 1: Provided by Customer.

Support Equipment – Radiated					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	USB Cable	Fujiei	US0090	-	Note 1
2	VTREE USB-CONSULE BOARD	Xavi	V0.1-200515	-	Note 1
3	Type C to USB	DIEN	DN-MQ38	-	Note 1
4	Adapter	RUIDIR	NB-A520A USBA-1	-	Note 1

Note 1: Provided by Customer.

2.4 Test Setup Diagram

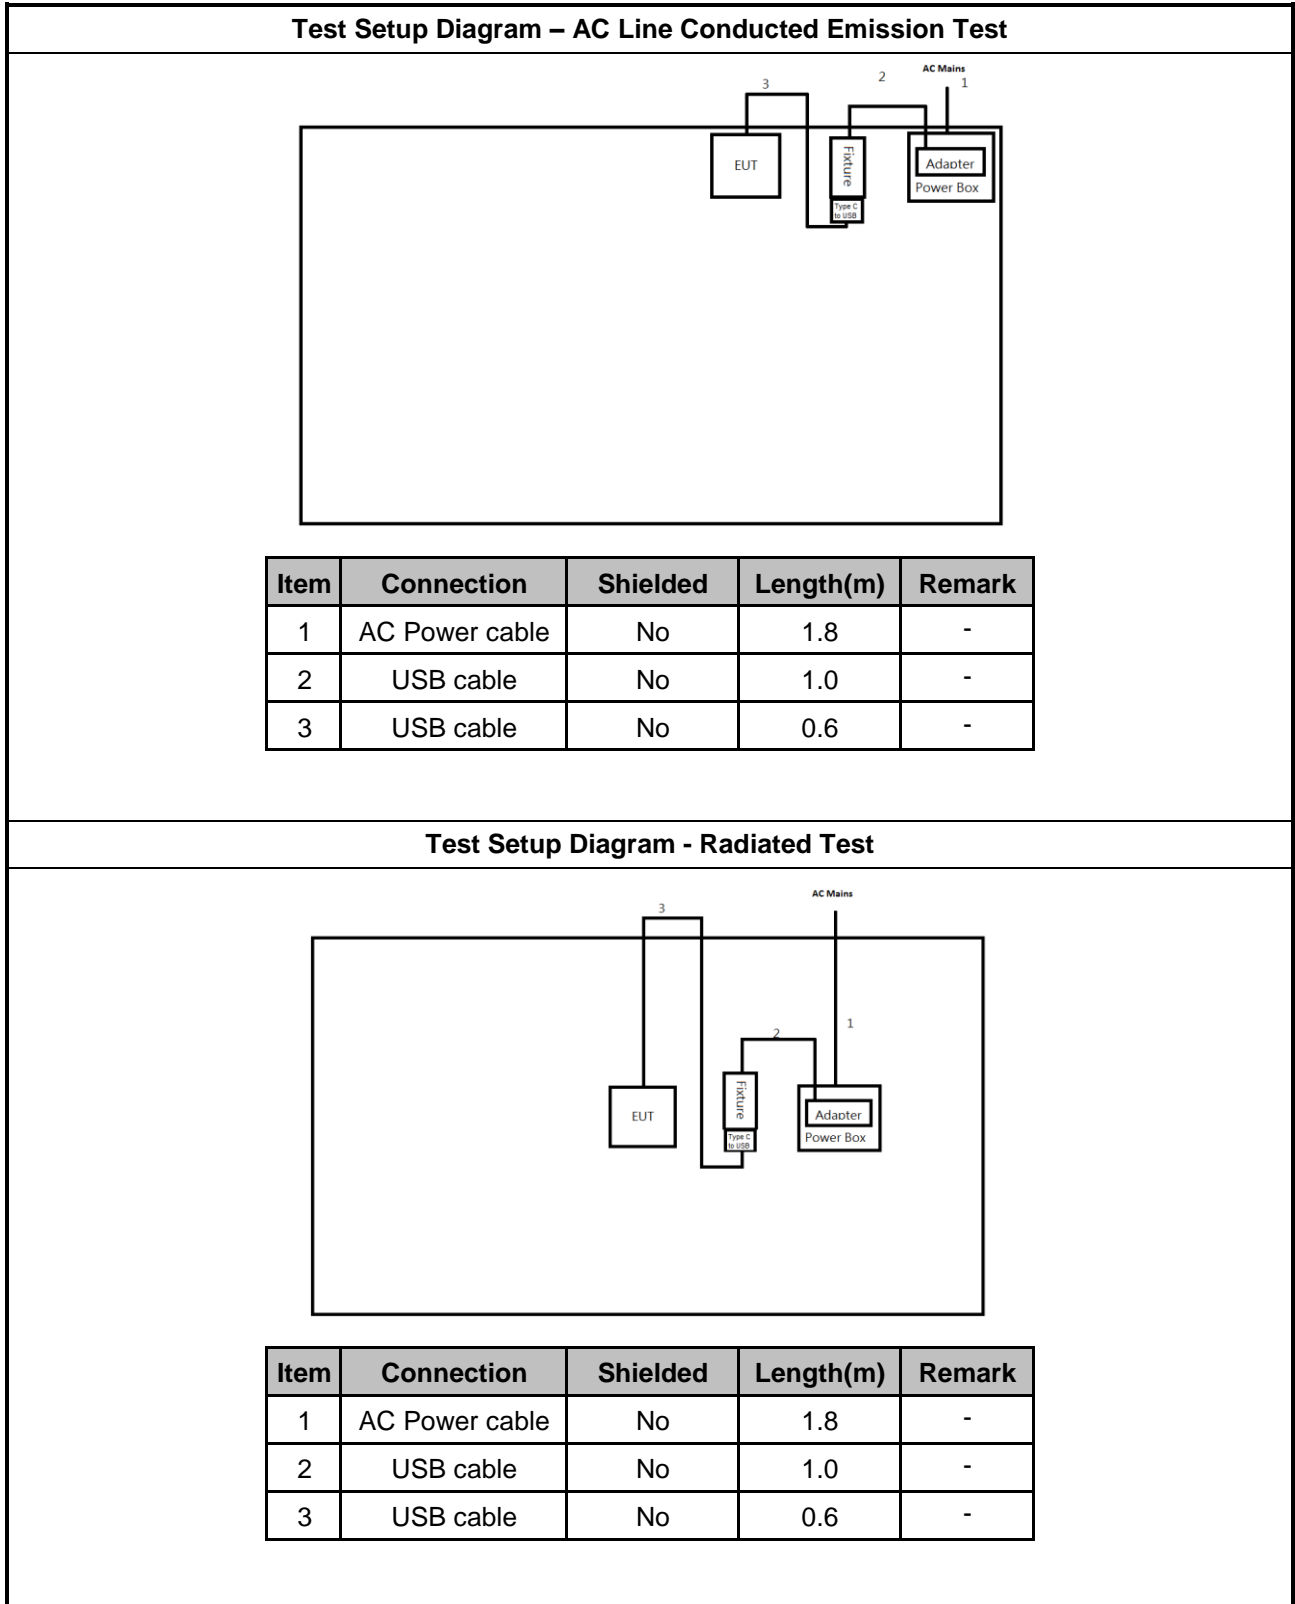



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures


Test Method
▪ Refer as ANSI C63.10-2013, clause 6.2 foray power-line conducted emissions.

3.1.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) +LISN(LISN Factor) + CL(Cable Loss) + AT(Attenuator).

3.1.5 Test Setup

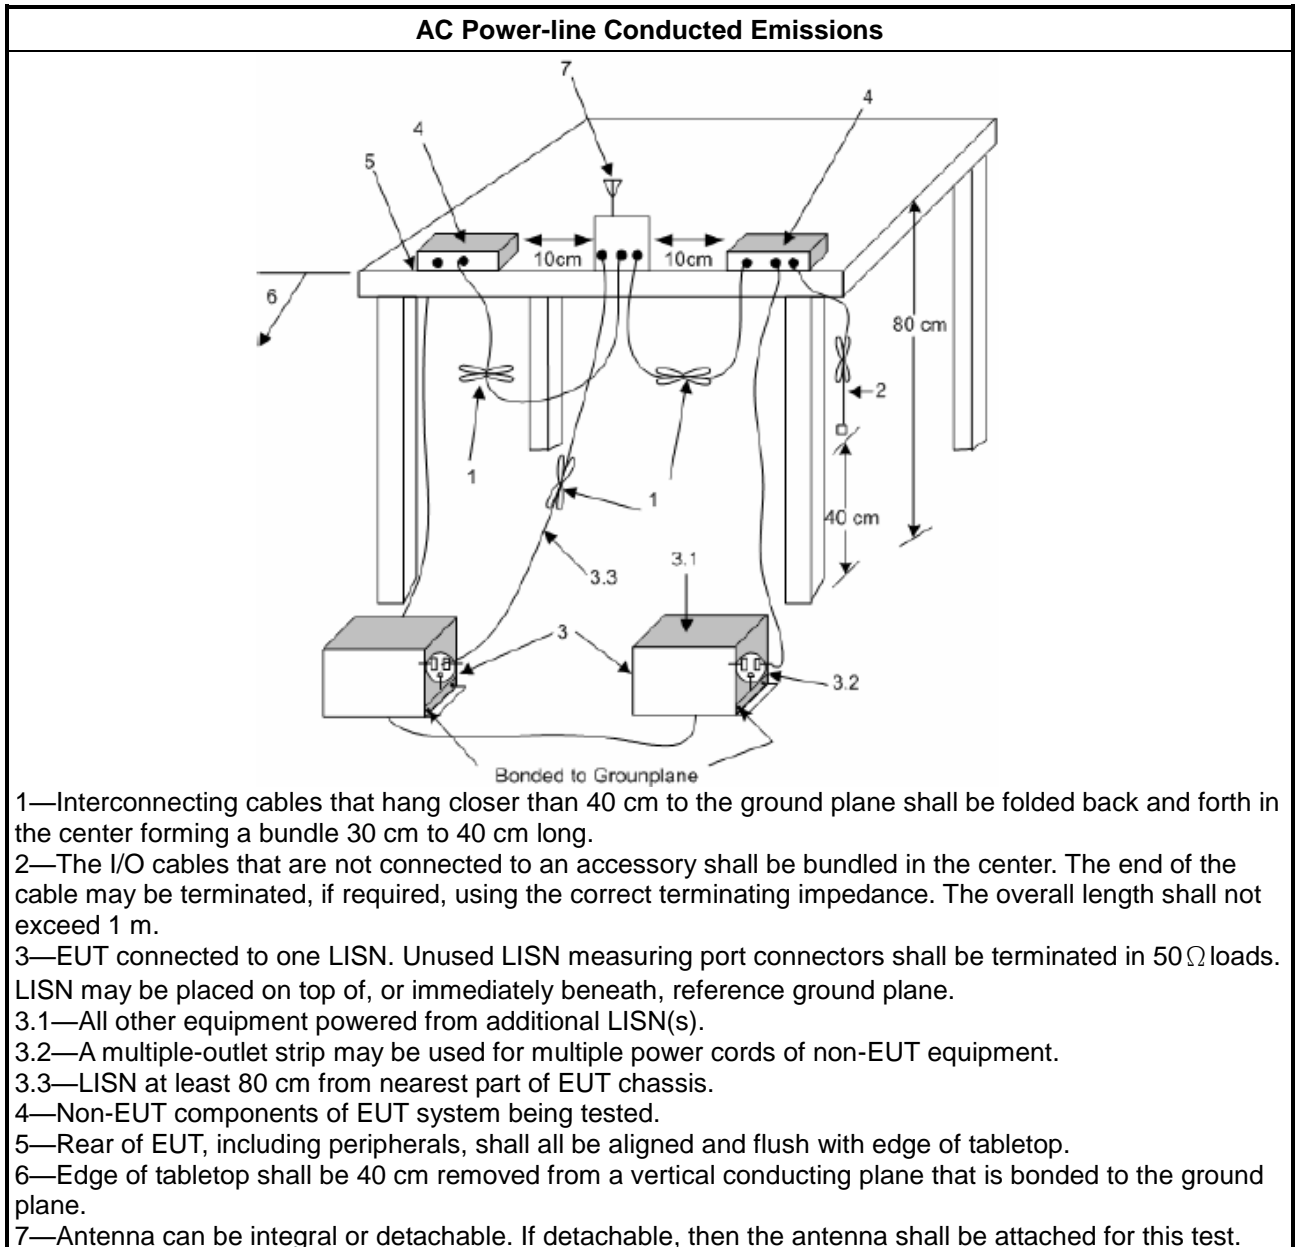

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
<ul style="list-style-type: none"> ▪ 6 dB bandwidth \geq 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
<ul style="list-style-type: none"> ▪ For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/> Refer as KDB 558074, clause 8.2 (11.8 of ANSI C63.10) DTS bandwidth measurement.
<input type="checkbox"/> Refer as RSS-Gen, clause 6.7 for occupied bandwidth testing.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.

3.2.4 Test Setup

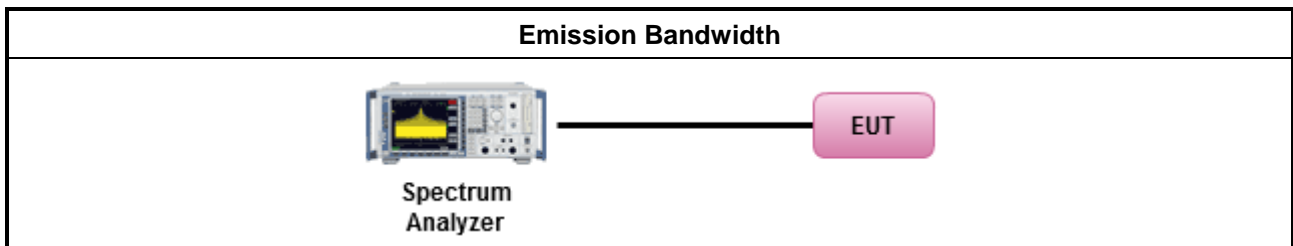

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	<ul style="list-style-type: none"> ▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	<ul style="list-style-type: none"> ▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	<ul style="list-style-type: none"> ▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<ul style="list-style-type: none"> ▪ Smart antenna system (SAS):
	<ul style="list-style-type: none"> - Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<ul style="list-style-type: none"> - Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<ul style="list-style-type: none"> - Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
e.i.r.p. Power Limit:	
	<ul style="list-style-type: none"> ▪ 2400-2483.5 MHz Band
	<ul style="list-style-type: none"> ▪ Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
	<ul style="list-style-type: none"> ▪ Point-to-point systems (P2P): $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])$ dBm
	<ul style="list-style-type: none"> ▪ Smart antenna system (SAS)
	<ul style="list-style-type: none"> - Single beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	<ul style="list-style-type: none"> - Overlap beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	<ul style="list-style-type: none"> - Aggregate power on all beams: $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])$ dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> ▪ Maximum Peak Conducted Output Power 	
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.1.1 (11.9.1.1 of ANSI C63.10) RBW ≥ EBW method.
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.1.2 (11.9.1.2 of ANSI C63.10) integrated band power method.
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.1.3 (11.9.1.3 of ANSI C63.10) peak power meter.
<ul style="list-style-type: none"> ▪ Maximum Average Conducted Output Power 	
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.2.2 (11.9.2.2 of ANSI C63.10) using a spectrum analyzer.
<input checked="" type="checkbox"/>	Refer as KDB 558074, clause 8.3.2.3 (11.9.2.3 of ANSI C63.10) using a power meter.
<ul style="list-style-type: none"> ▪ For conducted measurement. 	
<ul style="list-style-type: none"> ▪ If the EUT supports multiple transmit chains using options given below: Refer as KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. 	
<ul style="list-style-type: none"> ▪ If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$ 	

3.3.4 Test Setup

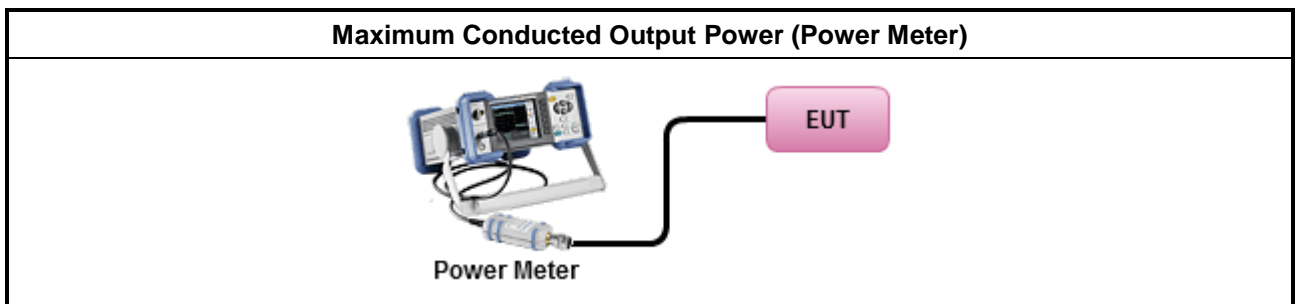

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<ul style="list-style-type: none"> Power Spectral Density (PSD) ≤ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
	<ul style="list-style-type: none"> Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
<input checked="" type="checkbox"/>	Refer as KDB 558074, clause 8.4 (11.10 of ANSI C63.10) Max. PSD.
	<ul style="list-style-type: none"> For conducted measurement.
	<ul style="list-style-type: none"> If The EUT supports multiple transmit chains using options given below:
	<ul style="list-style-type: none"> Measure and sum the spectra across the outputs. Refer as KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.

3.4.4 Test Setup

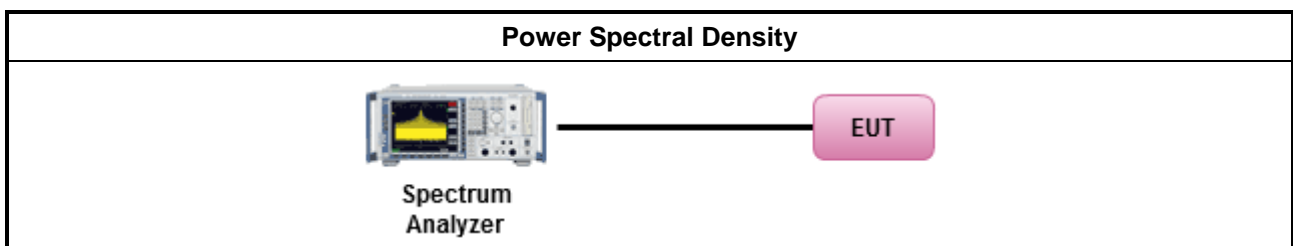

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average level.


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
<ul style="list-style-type: none"> Refer as KDB 558074, clause 8.5 (11.11 of ANSI C63.10) for non-restricted frequency bands.

3.5.4 Test Setup

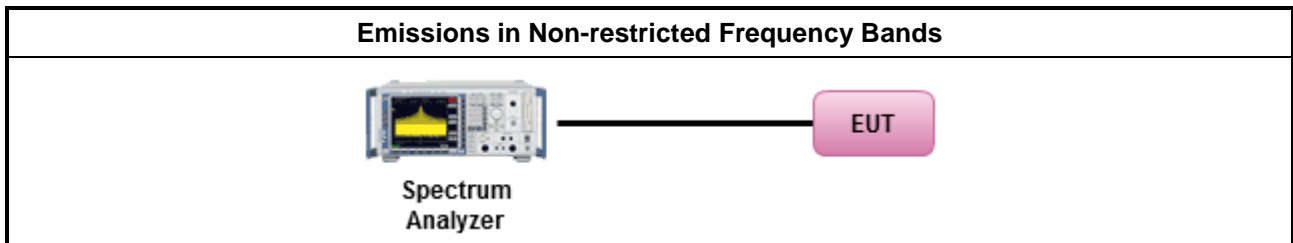

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures


Test Method	
	<ul style="list-style-type: none"> ▪ The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
	<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
	<ul style="list-style-type: none"> ▪ For the transmitter unwanted emissions shall be measured using following options below: <ul style="list-style-type: none"> ▪ Refer as KDB 558074, clause 8.6 (11.12 of ANSI C63.10) for restricted frequency bands.
	<ul style="list-style-type: none"> ▪ For the transmitter band-edge emissions shall be measured using following options below: <ul style="list-style-type: none"> ▪ Refer as KDB 558074 clause 8.7.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below. ▪ Refer as KDB 558074, clause 8.7.2 (6.10.6 of ANSI C63.10) for marker-delta method for band-edge measurements. ▪ Refer as KDB 558074, clause 8.7.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels.
	<ul style="list-style-type: none"> ▪ Use the following spectrum analyzer settings: <ul style="list-style-type: none"> ▪ Set RBW=100 kHz for $f < 1$ GHz; VBW=3 * RBW; Sweep = auto; Detector function = peak; Trace = max hold. ▪ Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement, refer as 1.1.4.
	<ul style="list-style-type: none"> ▪ KDB 414788 Open-Field Test Sites and Chamber Correlation Justification. <ul style="list-style-type: none"> ▪ Based on FCC 15.31(f)(2): measurements may be performed at a distance closer than that specified in regulations; however, an attempt should be made to avoid making measurements in the near field. ▪ Open-field site and chamber correlation testing had been performed and chamber measured test result is the worst case test result.


3.6.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + AF(Antenna Factor) + CL(Cable Loss) - PA(Preamplifier Factor)

3.6.5 Test Setup

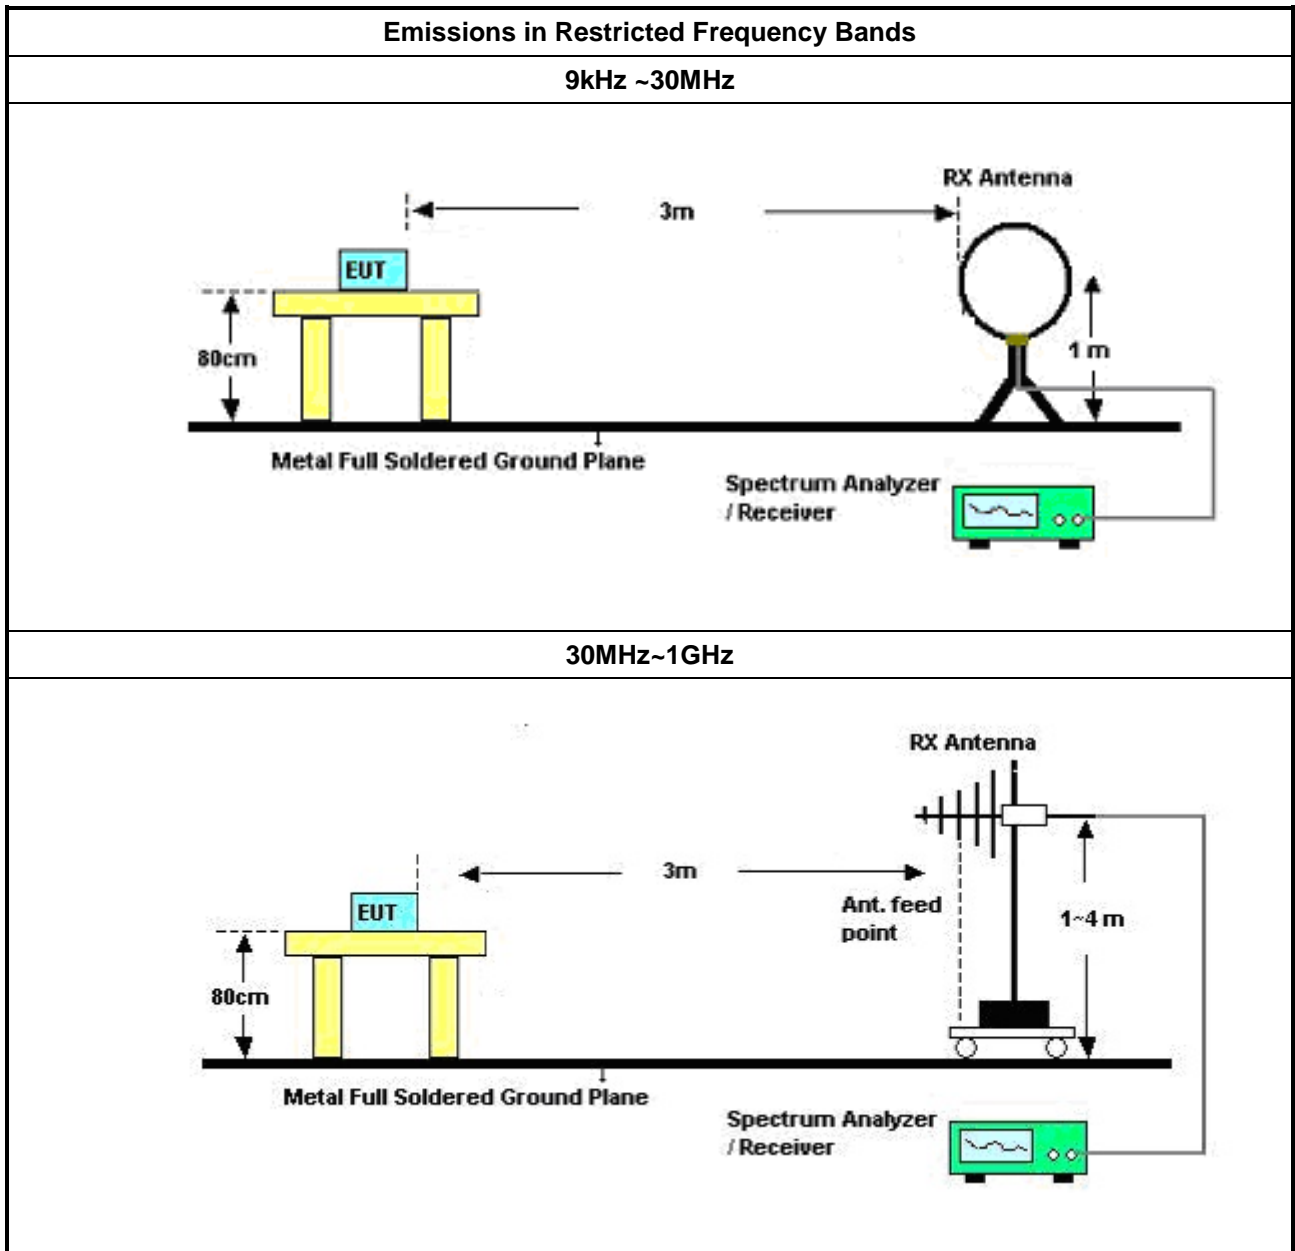

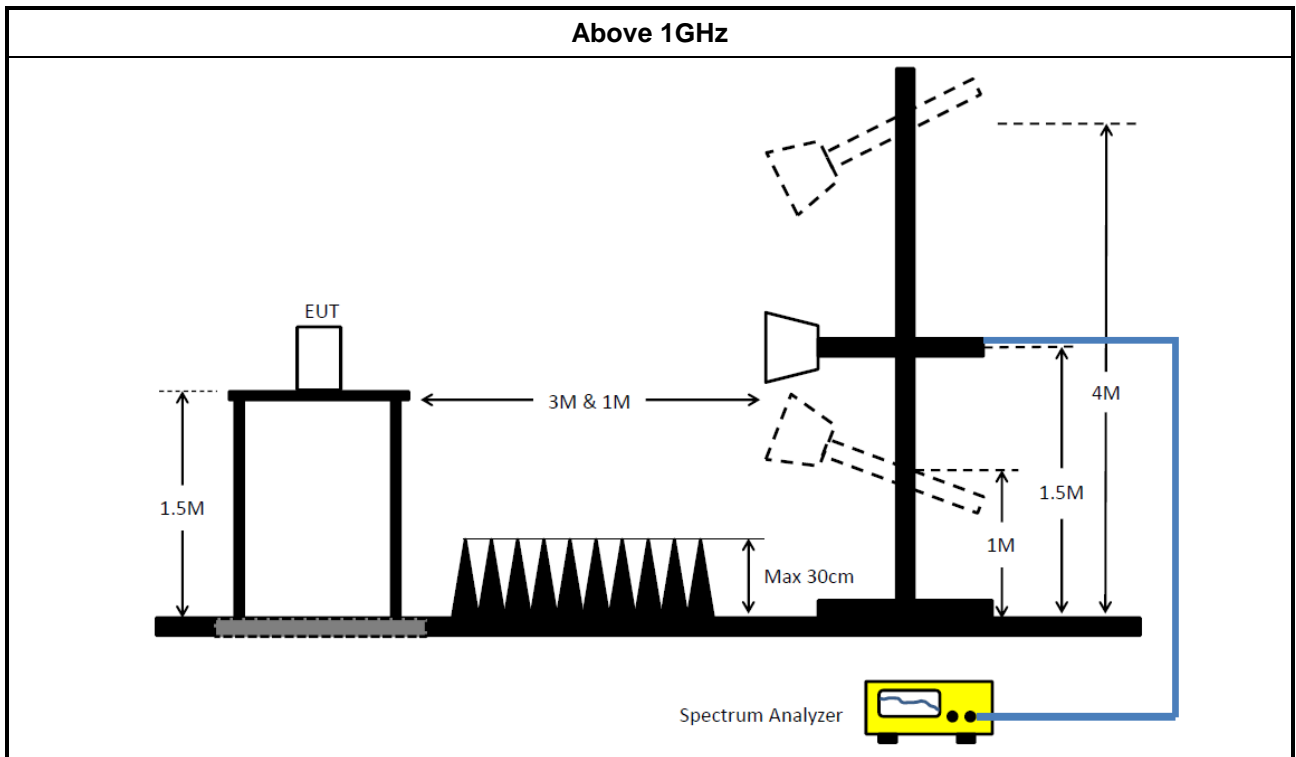

3.6.6 Test Result of Emissions in Restricted Frequency Bands (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F

4 Test Equipment and Calibration Data

Instrument for AC Conduction

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR	102052	9kHz ~ 3.6GHz	19/Apr/2021	18/Apr/2022
LISN	R&S	ENV216	101295	9kHz ~ 30MHz	11/Nov/2020	10/Nov/2021
RF Cable 5m	TITAN	TITAN	CO04-cable-01	0.1MHz~200MHz	03/Mar/2021	02/Mar/2022
Impuls Begrenzer Pulse Limiter	SCHWARZBECK	VTSD 9561-F	9561-F041	9kHz ~ 30MHz	21/Sep/2020	20/Sep/2021

Instrument for Conducted Test

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV 40	101029	10KHz ~ 40GHz	01/Oct/2019	30/Sep/2020
SMB100A Signal Generator	R&S	SMB100A03	181147	100kHz~40GHz	12/Nov/2018	11/Nov/2020
Pulse Sensor	Anritsu	MA2411B	1027452	300MHz~40GHz	18/Mar/2020	17/Mar/2021
Power Meter	Anritsu	ML2495A	1124009	300MHz~40GHz	18/Mar/2020	17/Mar/2021

Instrument for Radiated Test (below 1GHz)

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH09-HY	30MHz~1GHz 3m	26/Mar/2021	25/Mar/2022
EXA Signal Analyzer	KEYSIGHT	N9010A	MY54200885	10Hz~44GHz	11/Aug/2020	10/Aug/2021
Amplifier	EMC	EMC9135	980232	9kHz~1GHz	12/Apr/2021	11/Apr/2022
Bilog Antenna & 5dB Attenuator	TESEQ & MTJ	CBL6111D&MTJ 6102-05	35418 & 3	30MHz~1GHz	06/Sep/2020	05/Sep/2021
RF Cable-low	Jye Bao	RG142	CB031+324530/4	9kHz~30MHz	03/Sep/2020	02/Sep/2021
RF Cable-low	Jye Bao	RG142	CB031+324530/4	30MHz~1GHz	09/Feb/2021	08/Feb/2022
Loop Antenna	TESEQ	HLA 6120	31244	9kHz~30MHz	16/Mar/2021	15/Mar/2022
EMI Test Receiver	R&S	ESR3	102052	9kHz~3.6GHz	19/Apr/2021	18/Apr/2022



Instrument for Radiated Test (above 1GHz)

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH09-HY	1GHz~18GHz 3m	19/Mar/2020	18/Mar/2021
Signal Analyzer	R&S	FSV 40	101029	10Hz~40GHz	01/Oct/2019	30/Sep/2020
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA9120 D 1534	1GHz~18GHz	28/May/2020	27/May/2021
RF Cable-R03m	HUBER+SUHNER	SUCOFLEX104	324530/4+17173/4	1GHz~40GHz	12/Feb/2020	11/Feb/2021
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170221	18GHz~40GHz	13/Mar/2020	12/Mar/2021
Preamplifier	MITEQ	TTA1840-35-H G	1864481	18GHz~40GHz	10/Mar/2020	09/Mar/2021
EMI Test Receiver	R&S	ESR3	102051	9kHz~3.6GHz	29/May/2020	28/May/2021
Microwave Preamplifier	KEYSIGHT	83017A	MY53270197	1GHz~26.5GHz	27/Nov/2019	26/Nov/2020



Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	AV	435.504k	42.06	47.15	-5.09	Neutral



Result


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition	Comments
Mode 1	Pass	QP	229.932k	30.61	62.44	-31.83	Line	-
Mode 1	Pass	AV	229.932k	16.80	52.44	-35.64	Line	-
Mode 1	Pass	QP	435.504k	40.43	57.15	-16.72	Line	-
Mode 1	Pass	AV	435.504k	34.93	47.15	-12.22	Line	-
Mode 1	Pass	QP	717.31k	29.76	56.00	-26.24	Line	-
Mode 1	Pass	AV	717.31k	19.37	46.00	-26.63	Line	-
Mode 1	Pass	QP	1.311M	28.97	56.00	-27.03	Line	-
Mode 1	Pass	AV	1.311M	21.18	46.00	-24.82	Line	-
Mode 1	Pass	QP	2.878M	22.29	56.00	-33.71	Line	-
Mode 1	Pass	AV	2.878M	14.72	46.00	-31.28	Line	-
Mode 1	Pass	QP	13.489M	24.10	60.00	-35.90	Line	-
Mode 1	Pass	AV	13.489M	15.58	50.00	-34.42	Line	-
Mode 1	Pass	QP	156.734k	33.75	65.64	-31.89	Neutral	-
Mode 1	Pass	AV	156.734k	22.18	55.64	-33.46	Neutral	-
Mode 1	Pass	QP	435.504k	47.22	57.15	-9.93	Neutral	-
Mode 1	Pass	AV	435.504k	42.06	47.15	-5.09	Neutral	-
Mode 1	Pass	QP	915.089k	33.39	56.00	-22.61	Neutral	-
Mode 1	Pass	AV	915.089k	26.61	46.00	-19.39	Neutral	-
Mode 1	Pass	QP	1.332M	32.02	56.00	-23.98	Neutral	-
Mode 1	Pass	AV	1.332M	24.75	46.00	-21.25	Neutral	-
Mode 1	Pass	QP	3.929M	27.88	56.00	-28.12	Neutral	-
Mode 1	Pass	AV	3.929M	19.89	46.00	-26.11	Neutral	-
Mode 1	Pass	QP	13.761M	34.04	60.00	-25.96	Neutral	-
Mode 1	Pass	AV	13.761M	22.59	50.00	-27.41	Neutral	-

Conducted Emissions at Powerline_Mode 1

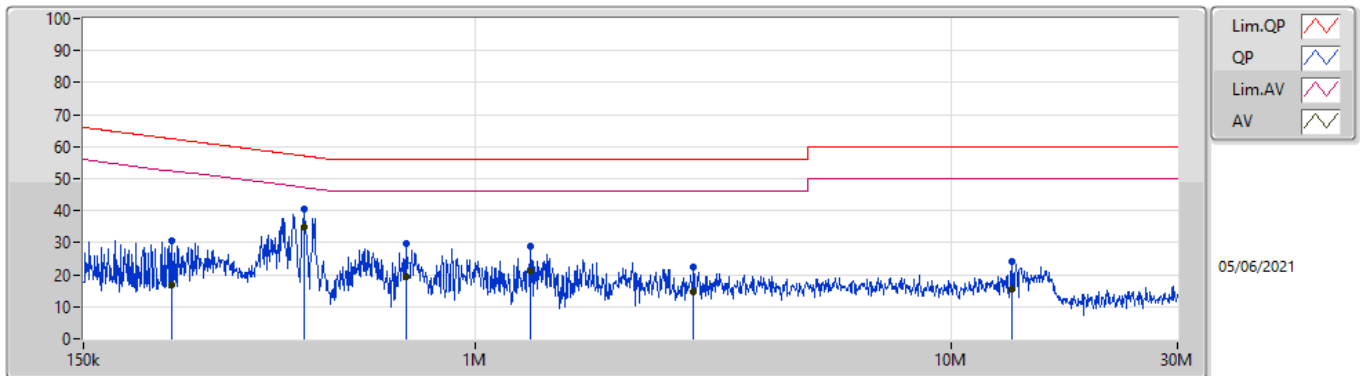

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)				
QP	229.932k	30.61	62.44	-31.83	19.62	Line	-	10.99	9.68	0.04	9.90				
AV	229.932k	16.80	52.44	-35.64	19.62	Line	-	-2.82	9.68	0.04	9.90				
QP	435.504k	40.43	57.15	-16.72	19.62	Line	-	20.81	9.67	0.06	9.89				
AV	435.504k	34.93	47.15	-12.22	19.62	Line	-	15.31	9.67	0.06	9.89				
QP	717.31k	29.76	56.00	-26.24	19.58	Line	-	10.18	9.67	0.07	9.84				
AV	717.31k	19.37	46.00	-26.63	19.58	Line	-	-0.21	9.67	0.07	9.84				
QP	1.311M	28.97	56.00	-27.03	19.56	Line	-	9.41	9.67	0.09	9.80				
AV	1.311M	21.18	46.00	-24.82	19.56	Line	-	1.62	9.67	0.09	9.80				
QP	2.878M	22.29	56.00	-33.71	19.66	Line	-	2.63	9.69	0.12	9.85				
AV	2.878M	14.72	46.00	-31.28	19.66	Line	-	-4.94	9.69	0.12	9.85				
QP	13.489M	24.10	60.00	-35.90	19.84	Line	-	4.26	9.70	0.24	9.90				
AV	13.489M	15.58	50.00	-34.42	19.84	Line	-	-4.26	9.70	0.24	9.90				

Conducted Emissions at Powerline_Mode 1

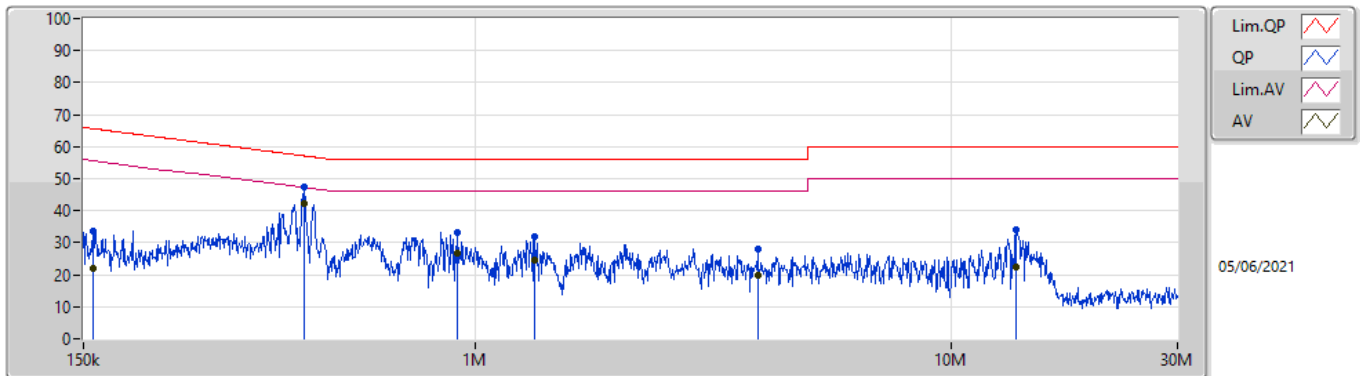

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	156.734k	33.75	65.64	-31.89	19.63	Neutral	-	14.12	9.69	0.04	9.90			
AV	156.734k	22.18	55.64	-33.46	19.63	Neutral	-	2.55	9.69	0.04	9.90			
QP	435.504k	47.22	57.15	-9.93	19.62	Neutral	-	27.60	9.67	0.06	9.89			
AV	435.504k	42.06	47.15	-5.09	19.62	Neutral	-	22.44	9.67	0.06	9.89			
QP	915.089k	33.39	56.00	-22.61	19.56	Neutral	-	13.83	9.67	0.08	9.81			
AV	915.089k	26.61	46.00	-19.39	19.56	Neutral	-	7.05	9.67	0.08	9.81			
QP	1.332M	32.02	56.00	-23.98	19.56	Neutral	-	12.46	9.67	0.09	9.80			
AV	1.332M	24.75	46.00	-21.25	19.56	Neutral	-	5.19	9.67	0.09	9.80			
QP	3.929M	27.88	56.00	-28.12	19.73	Neutral	-	8.15	9.69	0.14	9.90			
AV	3.929M	19.89	46.00	-26.11	19.73	Neutral	-	0.16	9.69	0.14	9.90			
QP	13.761M	34.04	60.00	-25.96	19.88	Neutral	-	14.16	9.74	0.24	9.90			
AV	13.761M	22.59	50.00	-27.41	19.88	Neutral	-	2.71	9.74	0.24	9.90			



Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	648.75k	1.017M	1M02F1D	643.75k	1.014M



Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;




Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	648.75k	1.014M
2440MHz	Pass	500k	646.25k	1.017M
2480MHz	Pass	500k	643.75k	1.015M

Port X-N dB = Port X 6dB down bandwidth; Port X-OBW = Port X 99% occupied bandwidth;

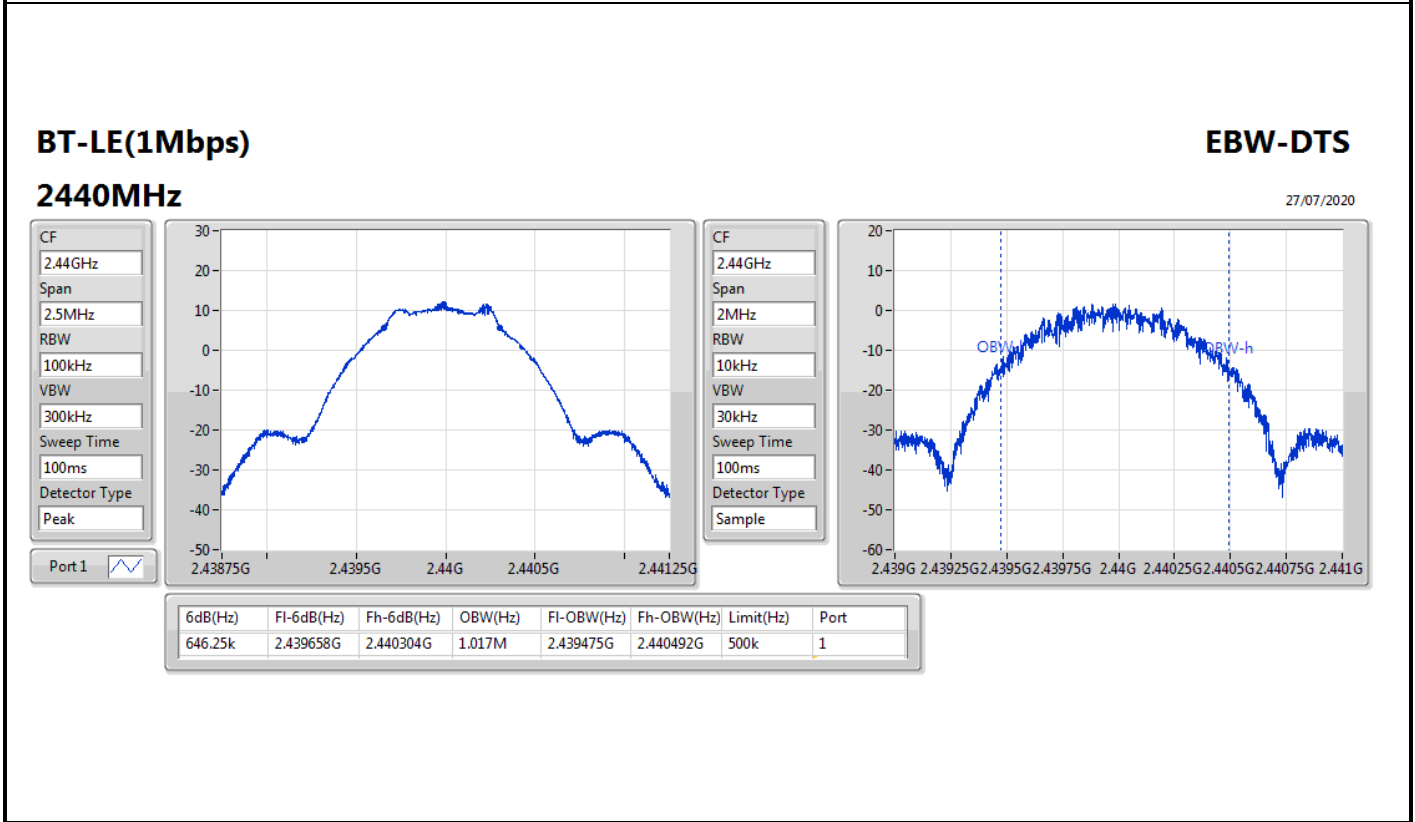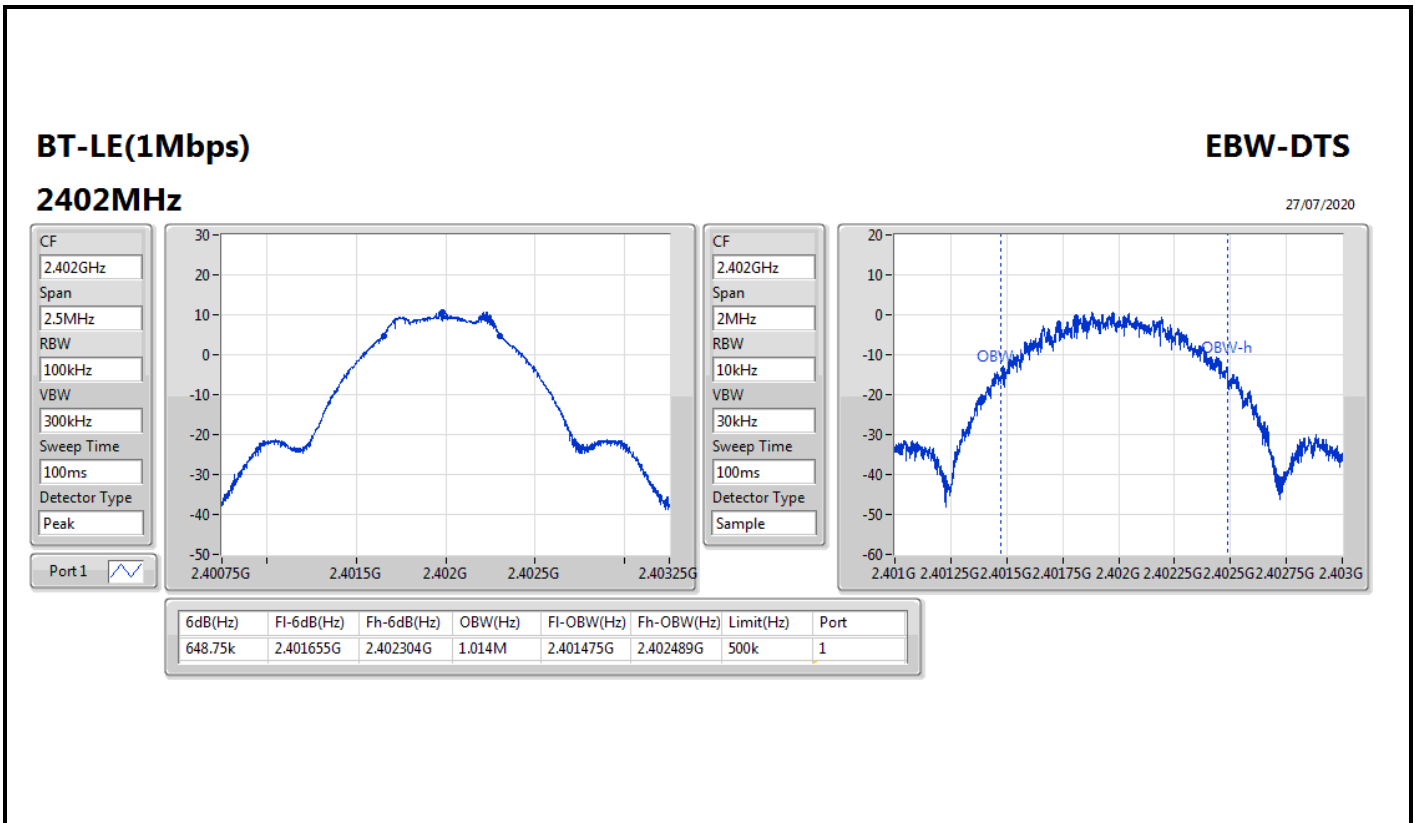

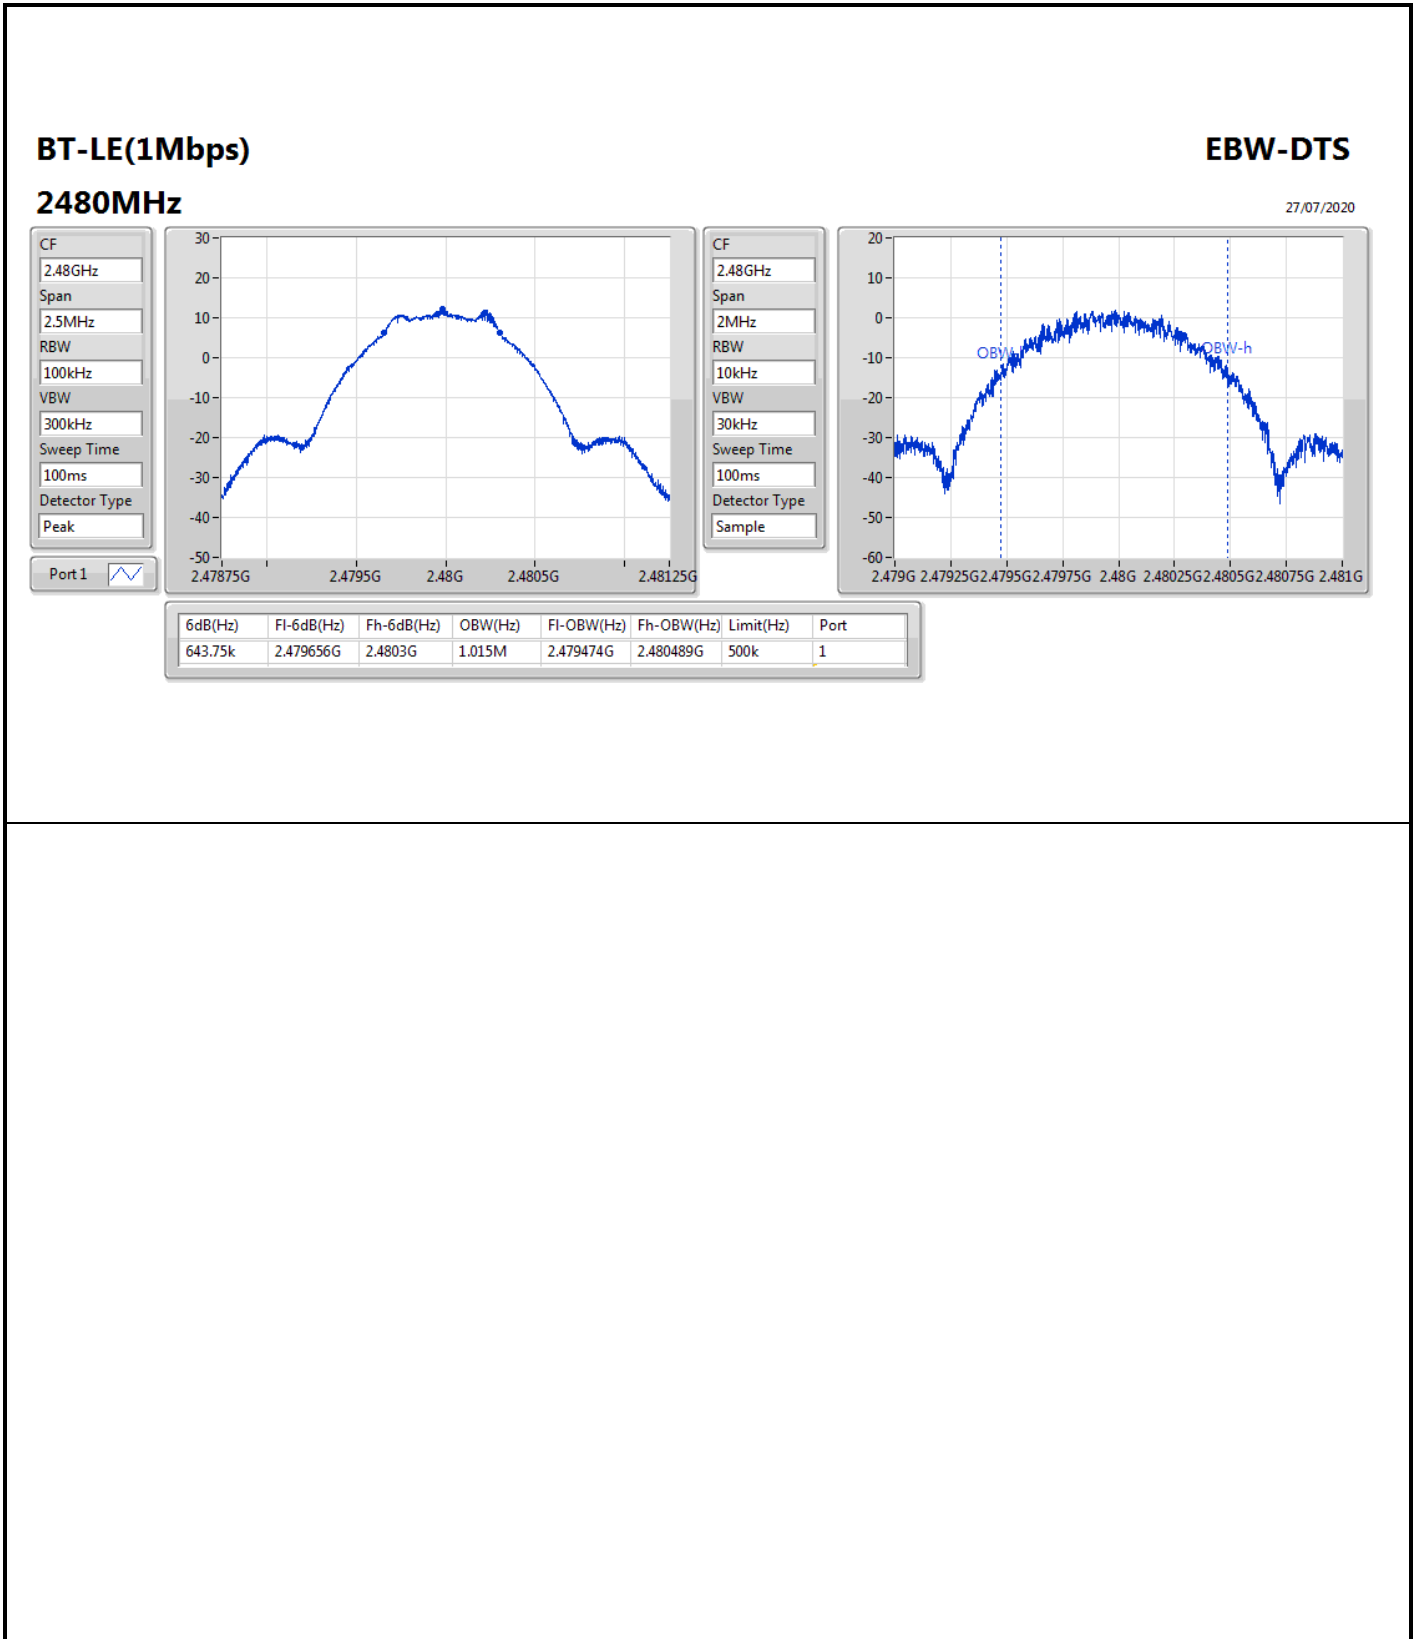



Summary

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	11.90	0.01549



Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	3.32	10.65	30.00
2440MHz	Pass	3.32	11.60	30.00
2480MHz	Pass	3.32	11.90	30.00

DG = Directional Gain; **Port X** = Port X output power



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-4.14

RBW=3 kHz.






Result

Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	3.32	-6.03	8.00
2440MHz	Pass	3.32	-4.63	8.00
2480MHz	Pass	3.32	-4.14	8.00

DG = Directional Gain; RBW=3 kHz;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

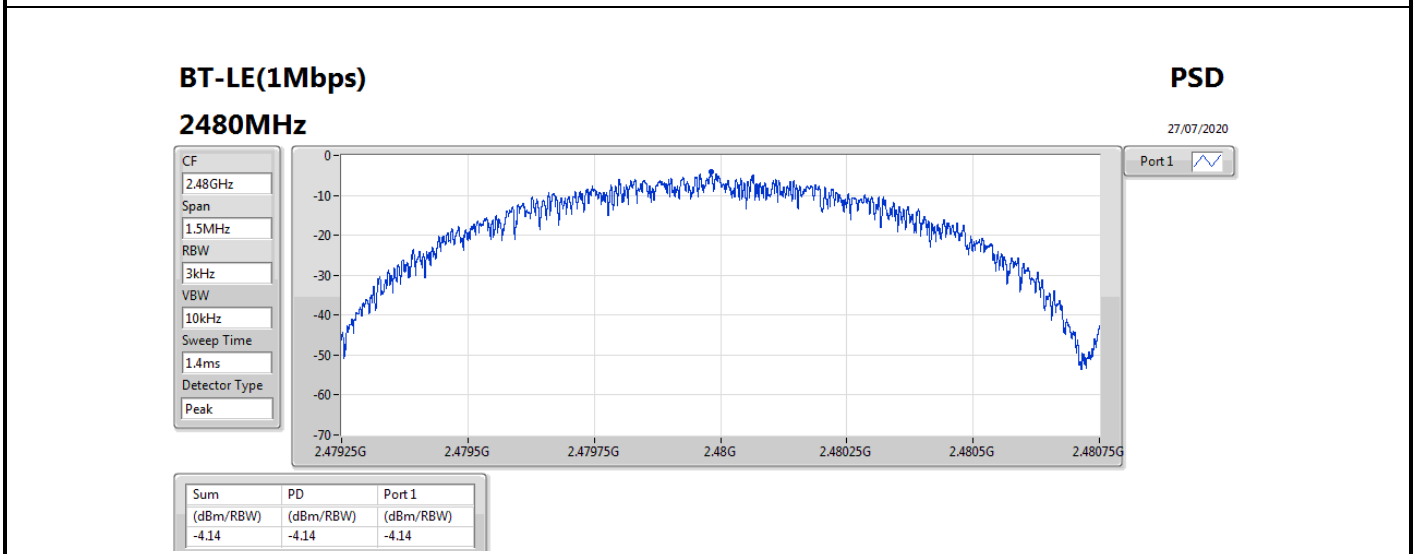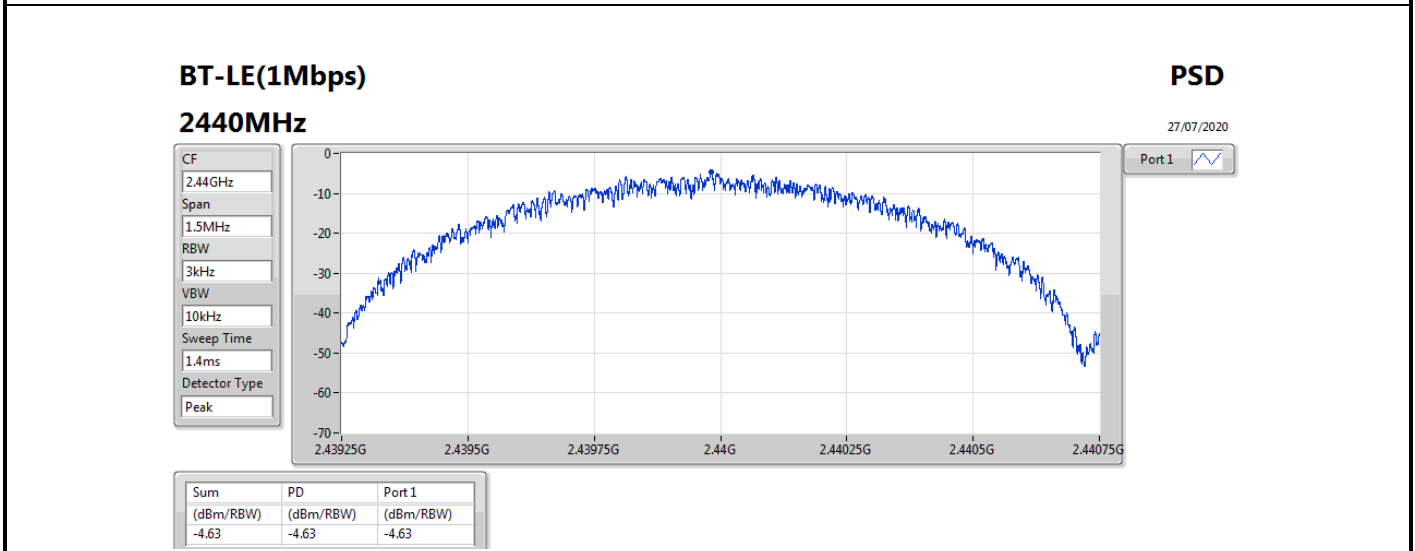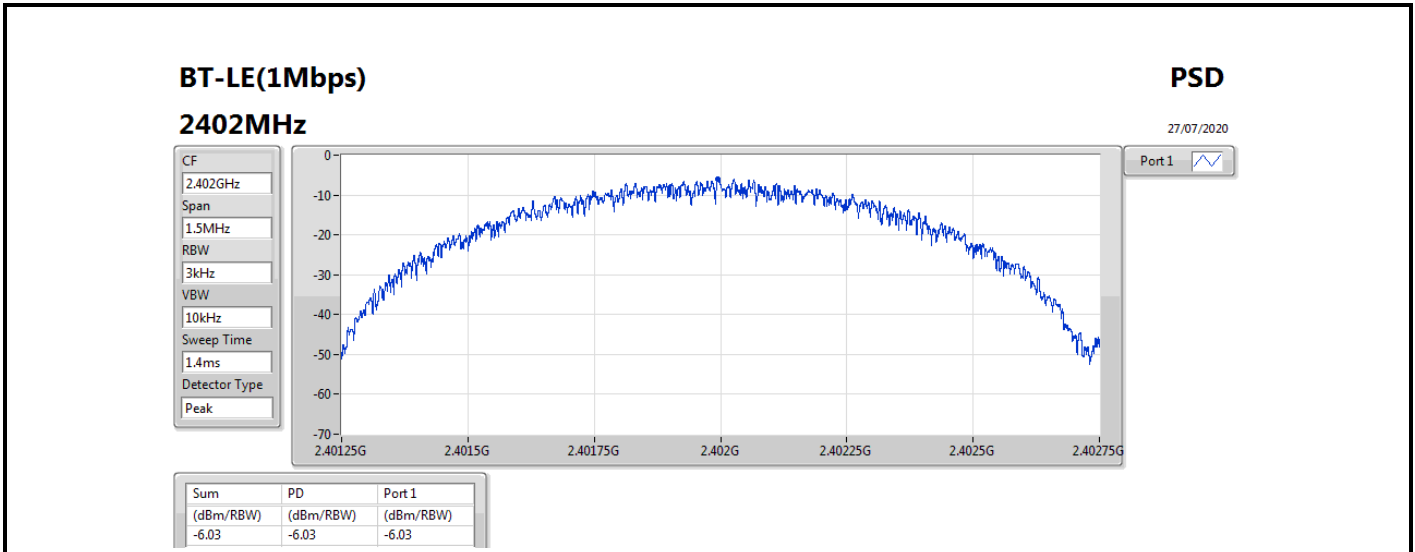





Summary


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	2.4802G	11.53	-18.47	49.98M	-47.30	2.39846G	-52.25	2.4835G	-43.26	2.48712G	-39.93	3.30494G	-36.81	1



Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.4802G	11.53	-18.47	49.98M	-45.45	2.39396G	-41.79	2.4G	-44.84	2.48943G	-50.88	3.20089G	-36.03	1
2440MHz	Pass	2.4802G	11.53	-18.47	49.98M	-45.69	2.39991G	-52.52	2.4835G	-54.02	2.48629G	-51.35	3.25151G	-36.67	1
2480MHz	Pass	2.4802G	11.53	-18.47	49.98M	-47.30	2.39846G	-52.25	2.4835G	-43.26	2.48712G	-39.93	3.30494G	-36.81	1

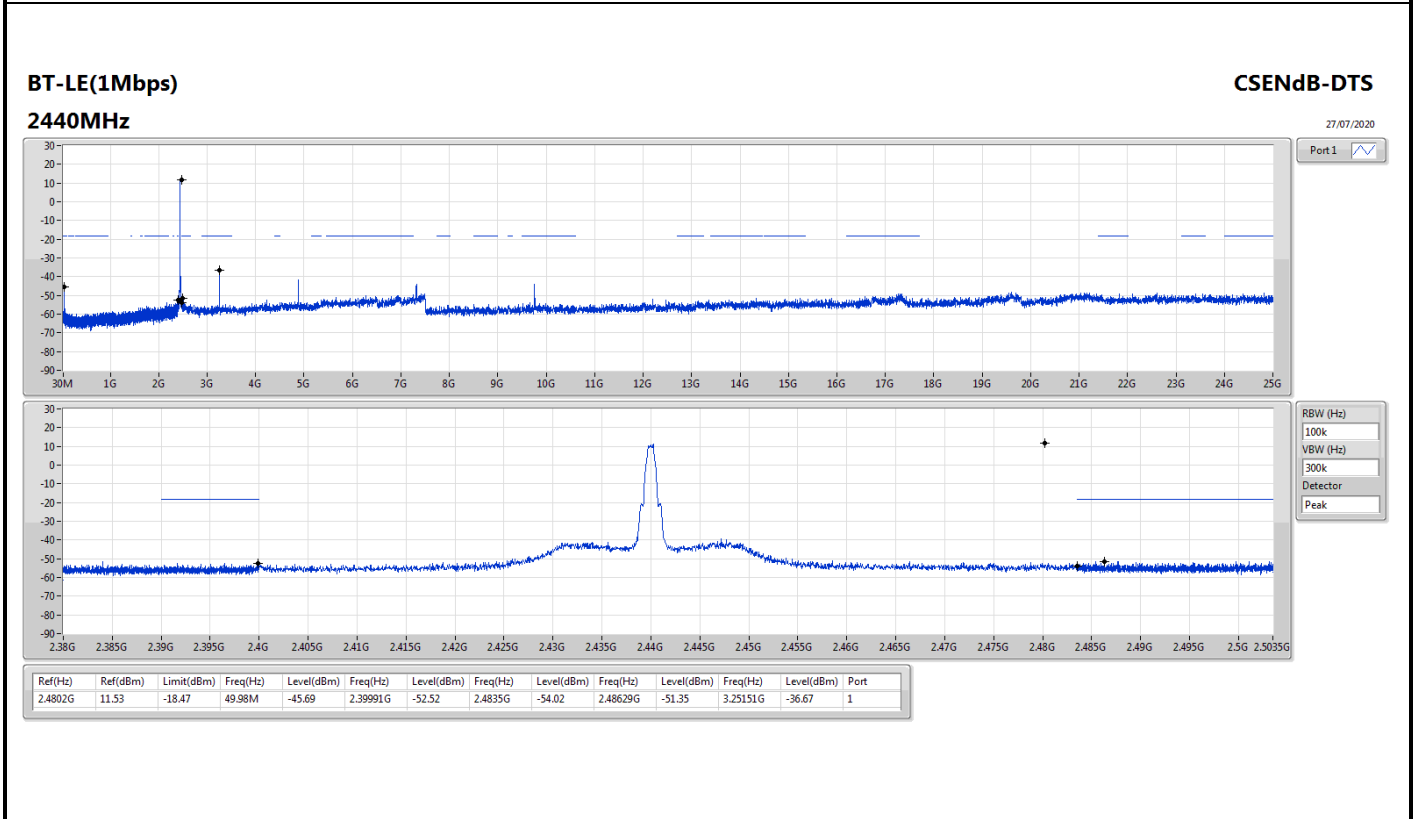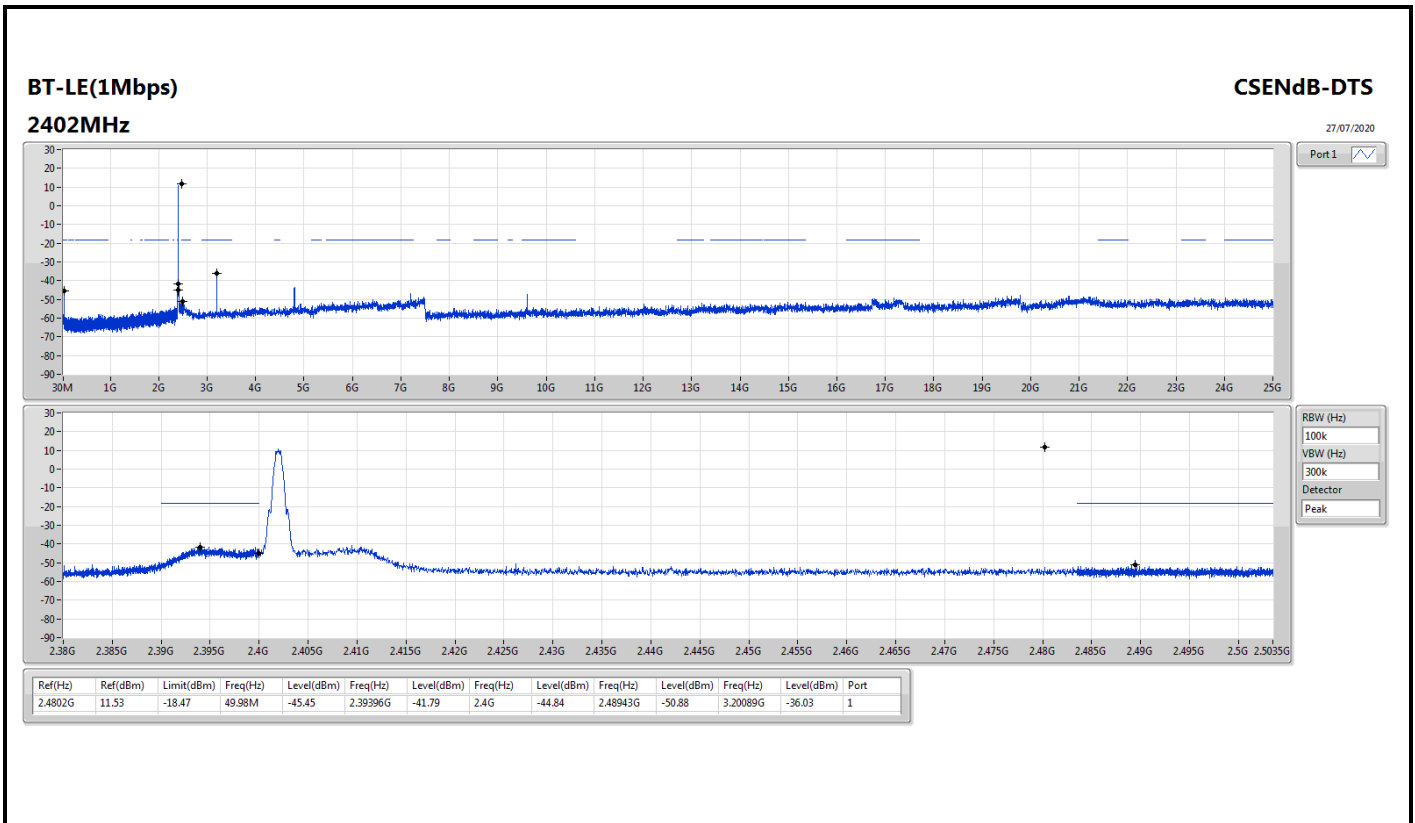

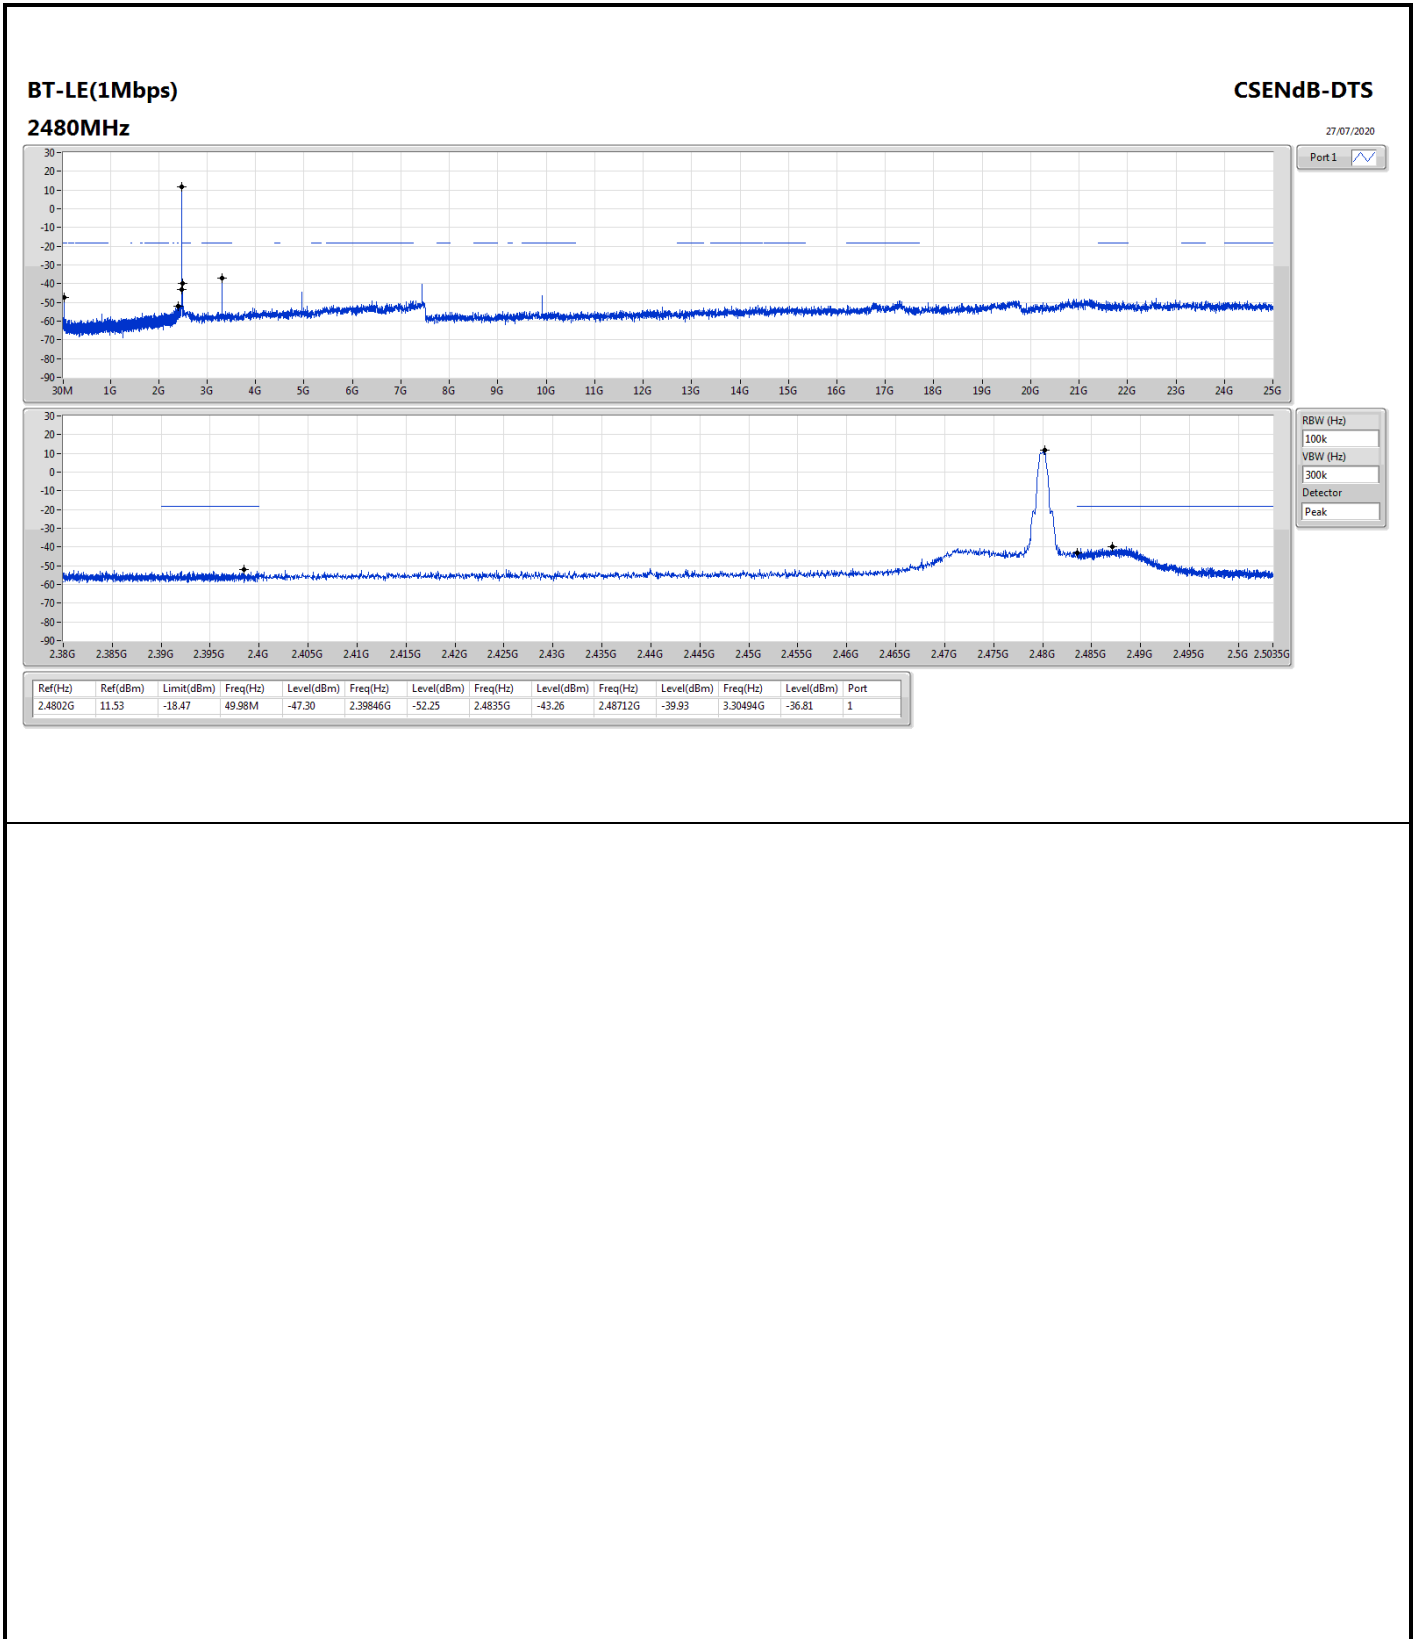



Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	PK	714.82M	38.83	46.00	-7.17	3	Horizontal	0	1.00	-



Result


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-
2440MHz	Pass	PK	64.92M	27.92	40.00	-12.08	3	Vertical	360	1.00	-
2440MHz	Pass	PK	94.02M	30.93	43.50	-12.57	3	Vertical	360	1.00	-
2440MHz	Pass	PK	319.06M	23.44	46.00	-22.56	3	Vertical	360	1.00	-
2440MHz	Pass	PK	480.08M	26.68	46.00	-19.32	3	Vertical	360	1.00	-
2440MHz	Pass	PK	639.16M	27.91	46.00	-18.09	3	Vertical	360	1.00	-
2440MHz	Pass	PK	939.86M	30.36	46.00	-15.64	3	Vertical	360	1.00	-
2440MHz	Pass	PK	35.82M	21.70	40.00	-18.30	3	Horizontal	0	1.00	-
2440MHz	Pass	PK	159.98M	28.05	43.50	-15.45	3	Horizontal	0	1.00	-
2440MHz	Pass	PK	319.06M	31.88	46.00	-14.12	3	Horizontal	0	1.00	-
2440MHz	Pass	PK	400.54M	26.61	46.00	-19.39	3	Horizontal	0	1.00	-
2440MHz	Pass	PK	714.82M	38.83	46.00	-7.17	3	Horizontal	0	1.00	-
2440MHz	Pass	PK	776.9M	36.04	46.00	-9.96	3	Horizontal	0	1.00	-

BT-LE(1Mbps)
2440MHz_Adapter

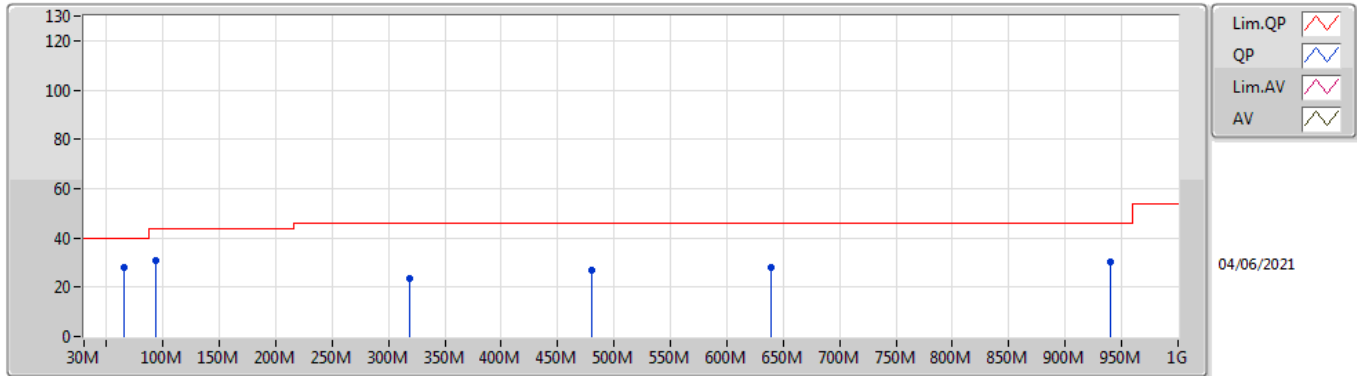

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	64.92M	27.92	40.00	-12.08	-25.30	3	Vertical	360	1.00	-	53.22	10.91	0.82	37.03
PK	94.02M	30.93	43.50	-12.57	-21.27	3	Vertical	360	1.00	-	52.20	14.47	0.96	36.70
PK	319.06M	23.44	46.00	-22.56	-16.12	3	Vertical	360	1.00	-	39.56	18.64	1.71	36.47
PK	480.08M	26.68	46.00	-19.32	-11.69	3	Vertical	360	1.00	-	38.37	22.97	2.18	36.84
PK	639.16M	27.91	46.00	-18.09	-9.09	3	Vertical	360	1.00	-	37.00	25.54	2.59	37.22
PK	939.86M	30.36	46.00	-15.64	-4.95	3	Vertical	360	1.00	-	35.31	29.54	3.08	37.57

BT-LE(1Mbps)
2440MHz_Adapter

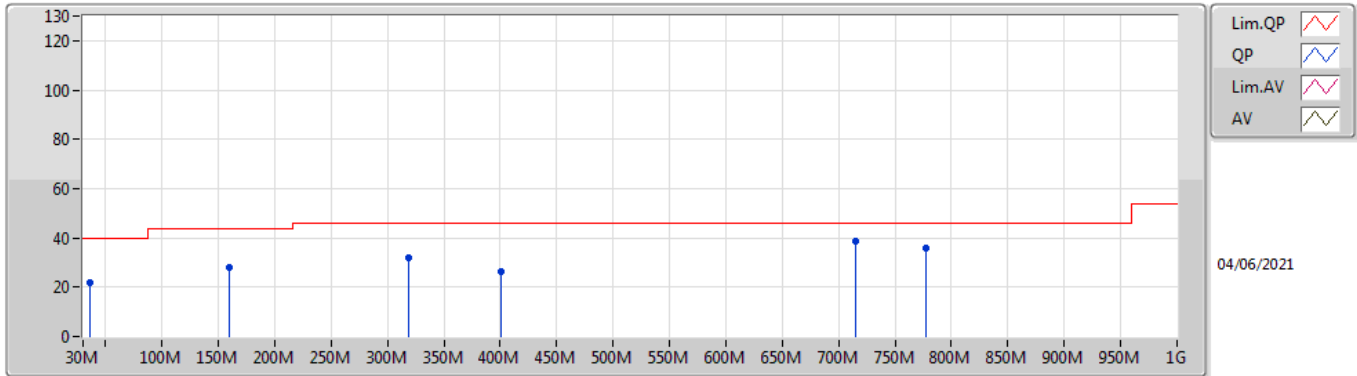

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	35.82M	21.70	40.00	-18.30	-15.77	3	Horizontal	0	1.00	-	37.47	20.63	0.67	37.07
PK	159.98M	28.05	43.50	-15.45	-19.37	3	Horizontal	0	1.00	-	47.42	15.77	1.23	36.37
PK	319.06M	31.88	46.00	-14.12	-16.12	3	Horizontal	0	1.00	-	48.00	18.64	1.71	36.47
PK	400.54M	26.61	46.00	-19.39	-13.53	3	Horizontal	0	1.00	-	40.14	21.13	1.91	36.57
PK	714.82M	38.83	46.00	-7.17	-8.60	3	Horizontal	0	1.00	-	47.43	26.07	2.71	37.38
PK	776.9M	36.04	46.00	-9.96	-7.41	3	Horizontal	0	1.00	-	43.45	27.36	2.77	37.54



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	AV	2.488G	51.16	54.00	-2.84	3	Horizontal	332	1.01	-



Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	AV	2.39G	46.67	54.00	-7.33	3	Vertical	15	2.75	-
2402MHz	Pass	AV	2.402G	97.42	Inf	-Inf	3	Vertical	15	2.75	-
2402MHz	Pass	PK	2.3588G	57.99	74.00	-16.01	3	Vertical	15	2.75	-
2402MHz	Pass	PK	2.4018G	98.55	Inf	-Inf	3	Vertical	15	2.75	-
2402MHz	Pass	AV	2.388G	46.93	54.00	-7.07	3	Horizontal	147	1.50	-
2402MHz	Pass	AV	2.402G	103.03	Inf	-Inf	3	Horizontal	147	1.50	-
2402MHz	Pass	PK	2.39G	58.76	74.00	-15.24	3	Horizontal	147	1.50	-
2402MHz	Pass	PK	2.4018G	104.17	Inf	-Inf	3	Horizontal	147	1.50	-
2402MHz	Pass	AV	4.8151G	34.53	54.00	-19.47	3	Vertical	63	2.77	-
2402MHz	Pass	PK	4.81204G	46.87	74.00	-27.13	3	Vertical	63	2.77	-
2402MHz	Pass	AV	4.81816G	34.34	54.00	-19.66	3	Horizontal	122	1.50	-
2402MHz	Pass	PK	4.80292G	46.41	74.00	-27.59	3	Horizontal	122	1.50	-
2440MHz	Pass	AV	2.3696G	46.29	54.00	-7.71	3	Vertical	154	3.00	-
2440MHz	Pass	AV	2.44G	96.73	Inf	-Inf	3	Vertical	154	3.00	-
2440MHz	Pass	AV	2.4835G	46.55	54.00	-7.45	3	Vertical	154	3.00	-
2440MHz	Pass	PK	2.35G	57.47	74.00	-16.53	3	Vertical	154	3.00	-
2440MHz	Pass	PK	2.4404G	97.91	Inf	-Inf	3	Vertical	154	3.00	-
2440MHz	Pass	PK	2.4912G	57.25	74.00	-16.75	3	Vertical	154	3.00	-
2440MHz	Pass	AV	2.3468G	46.36	54.00	-7.64	3	Horizontal	66	1.41	-
2440MHz	Pass	AV	2.44G	103.71	Inf	-Inf	3	Horizontal	66	1.41	-
2440MHz	Pass	AV	2.4936G	46.88	54.00	-7.12	3	Horizontal	66	1.41	-
2440MHz	Pass	PK	2.3536G	58.03	74.00	-15.97	3	Horizontal	66	1.41	-
2440MHz	Pass	PK	2.4404G	104.84	Inf	-Inf	3	Horizontal	66	1.41	-
2440MHz	Pass	PK	2.4872G	59.26	74.00	-14.74	3	Horizontal	66	1.41	-
2440MHz	Pass	AV	4.87658G	34.09	54.00	-19.91	3	Vertical	262	1.62	-
2440MHz	Pass	AV	7.33404G	40.01	54.00	-13.99	3	Vertical	345	1.78	-
2440MHz	Pass	PK	4.87814G	46.20	74.00	-27.80	3	Vertical	262	1.62	-
2440MHz	Pass	PK	7.317G	52.45	74.00	-21.55	3	Vertical	345	1.78	-
2440MHz	Pass	AV	4.87922G	34.33	54.00	-19.67	3	Horizontal	190	1.50	-
2440MHz	Pass	AV	7.31784G	39.94	54.00	-14.06	3	Horizontal	267	1.50	-
2440MHz	Pass	PK	4.8719G	46.10	74.00	-27.90	3	Horizontal	190	1.50	-
2440MHz	Pass	PK	7.3083G	51.81	74.00	-22.19	3	Horizontal	267	1.50	-
2480MHz	Pass	AV	2.48G	96.22	Inf	-Inf	3	Vertical	140	2.90	-
2480MHz	Pass	AV	2.4884G	47.67	54.00	-6.33	3	Vertical	147	2.90	-
2480MHz	Pass	PK	2.4802G	94.69	Inf	-Inf	3	Vertical	142	2.90	-
2480MHz	Pass	PK	2.4846G	58.96	74.00	-15.04	3	Vertical	167	2.90	-
2480MHz	Pass	AV	2.48G	104.41	Inf	-Inf	3	Horizontal	332	1.01	-
2480MHz	Pass	AV	2.488G	51.16	54.00	-2.84	3	Horizontal	332	1.01	-
2480MHz	Pass	PK	2.48G	105.59	Inf	-Inf	3	Horizontal	332	1.01	-
2480MHz	Pass	PK	2.49G	62.56	74.00	-11.44	3	Horizontal	332	1.01	-
2480MHz	Pass	AV	4.96324G	34.50	54.00	-19.50	3	Vertical	8	1.74	-
2480MHz	Pass	AV	7.44012G	40.04	54.00	-13.96	3	Vertical	302	1.50	-
2480MHz	Pass	PK	4.95046G	46.49	74.00	-27.51	3	Vertical	8	1.74	-
2480MHz	Pass	PK	7.43424G	51.91	74.00	-22.09	3	Vertical	302	1.50	-
2480MHz	Pass	AV	4.96606G	34.31	54.00	-19.69	3	Horizontal	229	1.65	-
2480MHz	Pass	AV	7.43778G	39.95	54.00	-14.05	3	Horizontal	99	1.50	-
2480MHz	Pass	PK	4.96306G	46.07	74.00	-27.93	3	Horizontal	229	1.65	-




Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2480MHz	Pass	PK	7.4526G	51.87	74.00	-22.13	3	Horizontal	99	1.50	-

BT-LE(1Mbps)

24/07/2020

2402MHz_TX

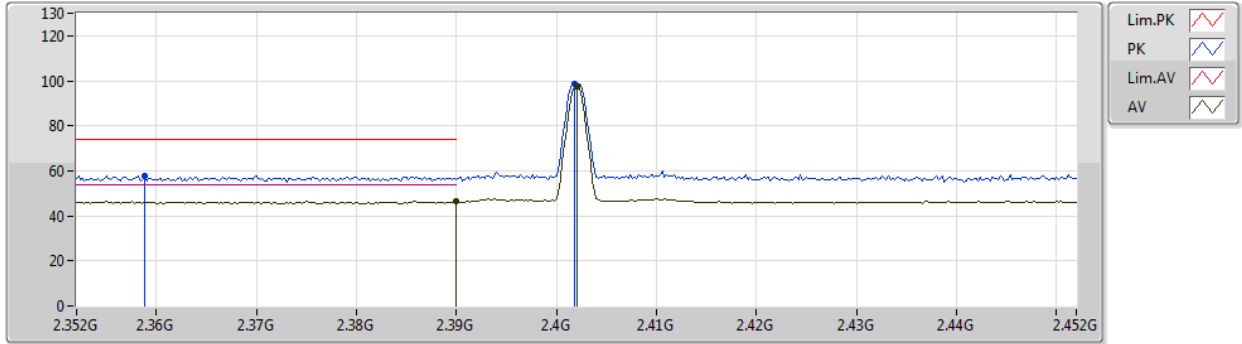


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.39G	46.67	54.00	-7.33	32.72	3	Vertical	15	2.75	-	13.95	27.64	5.08	-
AV	2.402G	97.42	Inf	-Inf	32.70	3	Vertical	15	2.75	-	64.72	27.60	5.10	-
PK	2.3588G	57.99	74.00	-16.01	32.78	3	Vertical	15	2.75	-	25.21	27.76	5.02	-
PK	2.4018G	98.55	Inf	-Inf	32.70	3	Vertical	15	2.75	-	65.85	27.60	5.10	-

BT-LE(1Mbps)

24/07/2020

2402MHz_TX

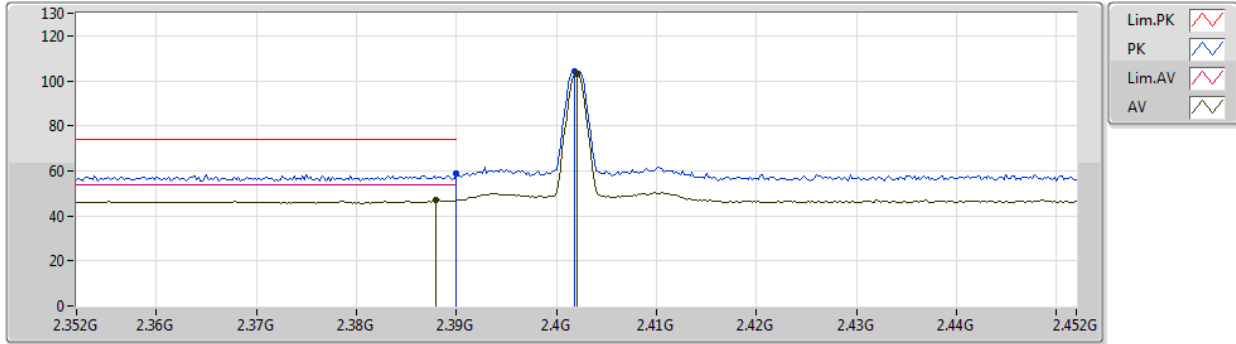


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.388G	46.93	54.00	-7.07	32.73	3	Horizontal	147	1.50	-	14.20	27.65	5.08	-
AV	2.402G	103.03	Inf	-Inf	32.70	3	Horizontal	147	1.50	-	70.33	27.60	5.10	-
PK	2.39G	58.76	74.00	-15.24	32.72	3	Horizontal	147	1.50	-	26.04	27.64	5.08	-
PK	2.4018G	104.17	Inf	-Inf	32.70	3	Horizontal	147	1.50	-	71.47	27.60	5.10	-



BT-LE(1Mbps)

24/07/2020

2402MHz_TX

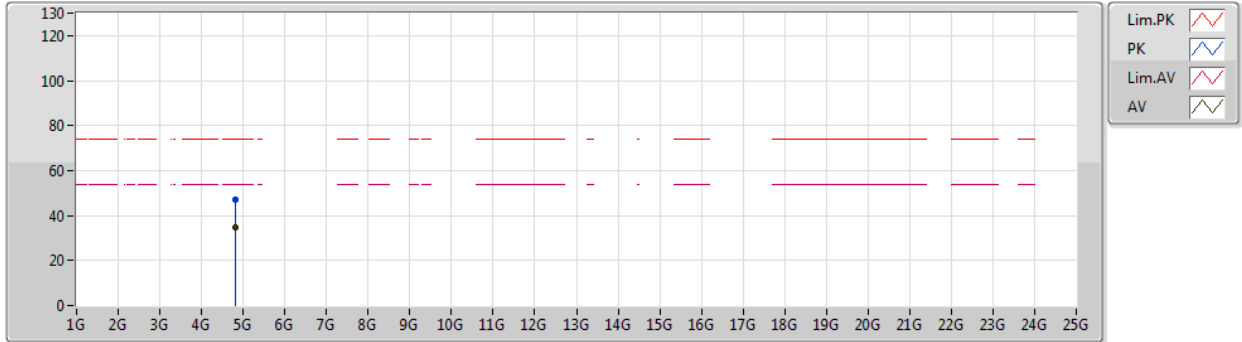


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.8151G	34.53	54.00	-19.47	7.95	3	Vertical	63	2.77	-	26.58	31.16	7.32	30.53
PK	4.81204G	46.87	74.00	-27.13	7.93	3	Vertical	63	2.77	-	38.94	31.15	7.31	30.53



BT-LE(1Mbps)

24/07/2020

2402MHz_TX

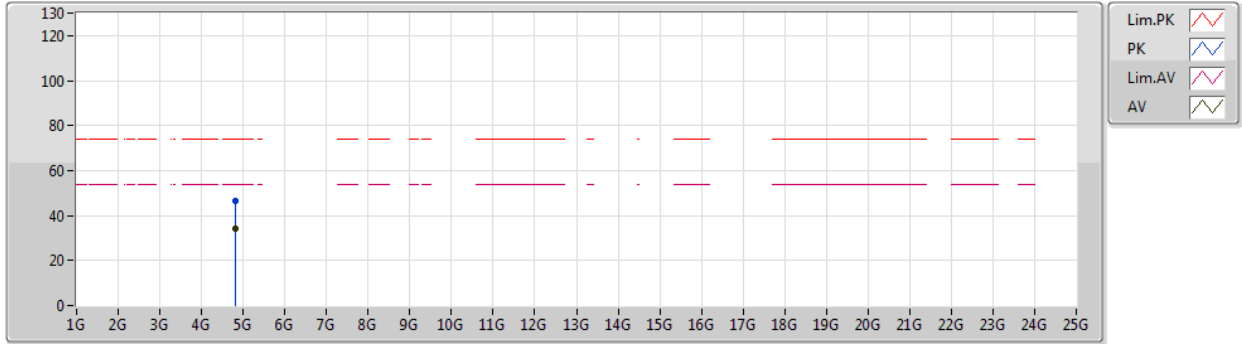


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.81816G	34.34	54.00	-19.66	7.96	3	Horizontal	122	1.50	-	26.38	31.17	7.32	30.53
PK	4.80292G	46.41	74.00	-27.59	7.88	3	Horizontal	122	1.50	-	38.53	31.11	7.30	30.53

BT-LE(1Mbps)

24/07/2020

2440MHz_TX

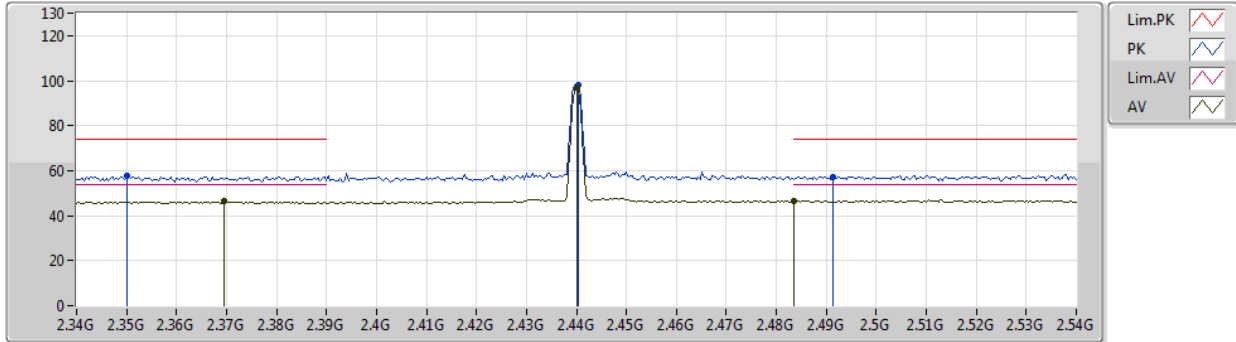


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.3696G	46.29	54.00	-7.71	32.76	3	Vertical	154	3.00	-	13.53	27.72	5.04	-
AV	2.44G	96.73	Inf	-Inf	32.76	3	Vertical	154	3.00	-	63.97	27.60	5.16	-
AV	2.4835G	46.55	54.00	-7.45	32.83	3	Vertical	154	3.00	-	13.72	27.60	5.23	-
PK	2.35G	57.47	74.00	-16.53	32.80	3	Vertical	154	3.00	-	24.67	27.80	5.00	-
PK	2.4404G	97.91	Inf	-Inf	32.76	3	Vertical	154	3.00	-	65.15	27.60	5.16	-
PK	2.4912G	57.25	74.00	-16.75	32.84	3	Vertical	154	3.00	-	24.41	27.60	5.24	-

BT-LE(1Mbps)

24/07/2020

2440MHz_TX

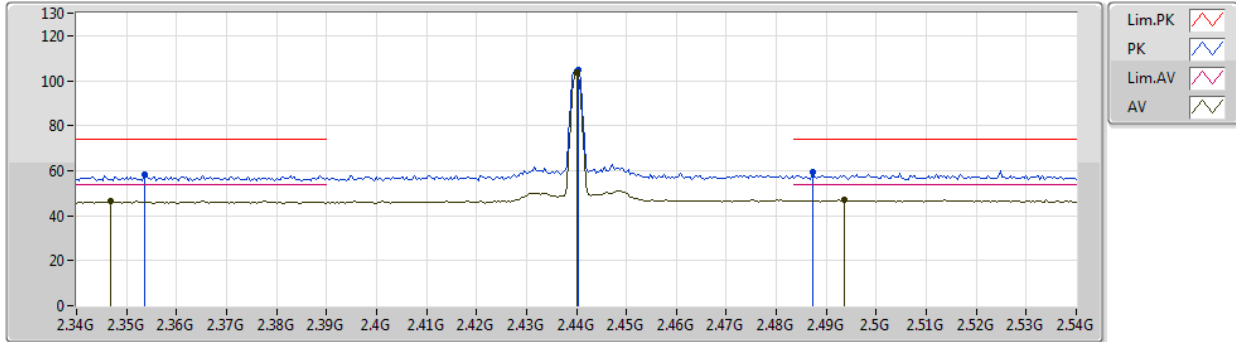


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.3468G	46.36	54.00	-7.64	32.80	3	Horizontal	66	1.41	-	13.56	27.81	4.99	-
AV	2.44G	103.71	Inf	-Inf	32.76	3	Horizontal	66	1.41	-	70.95	27.60	5.16	-
AV	2.4936G	46.88	54.00	-7.12	32.84	3	Horizontal	66	1.41	-	14.04	27.60	5.24	-
PK	2.3536G	58.03	74.00	-15.97	32.80	3	Horizontal	66	1.41	-	25.23	27.79	5.01	-
PK	2.4404G	104.84	Inf	-Inf	32.76	3	Horizontal	66	1.41	-	72.08	27.60	5.16	-
PK	2.4872G	59.26	74.00	-14.74	32.83	3	Horizontal	66	1.41	-	26.43	27.60	5.23	-

BT-LE(1Mbps)

24/07/2020

2440MHz_TX

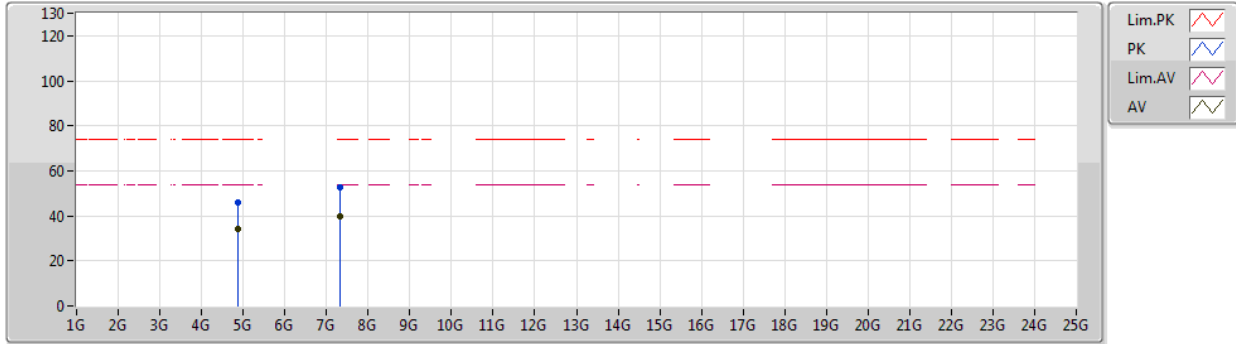


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.87658G	34.09	54.00	-19.91	8.09	3	Vertical	262	1.62	-	26.00	31.25	7.38	30.54
AV	7.33404G	40.01	54.00	-13.99	13.81	3	Vertical	345	1.78	-	26.20	36.53	8.60	31.32
PK	4.87814G	46.20	74.00	-27.80	8.08	3	Vertical	262	1.62	-	38.12	31.24	7.38	30.54
PK	7.317G	52.45	74.00	-21.55	13.85	3	Vertical	345	1.78	-	38.60	36.57	8.60	31.32

BT-LE(1Mbps)

24/07/2020

2440MHz_TX

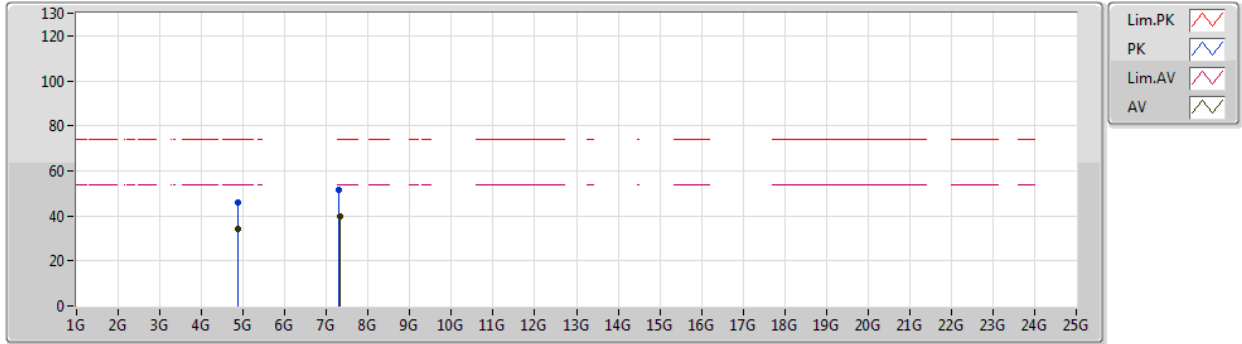


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.87922G	34.33	54.00	-19.67	8.08	3	Horizontal	190	1.50	-	26.25	31.24	7.38	30.54
AV	7.31784G	39.94	54.00	-14.06	13.84	3	Horizontal	267	1.50	-	26.10	36.56	8.60	31.32
PK	4.8719G	46.10	74.00	-27.90	8.10	3	Horizontal	190	1.50	-	38.00	31.26	7.37	30.53
PK	7.3083G	51.81	74.00	-22.19	13.86	3	Horizontal	267	1.50	-	37.95	36.58	8.60	31.32

BT-LE(1Mbps)

24/07/2020

2480MHz_TX

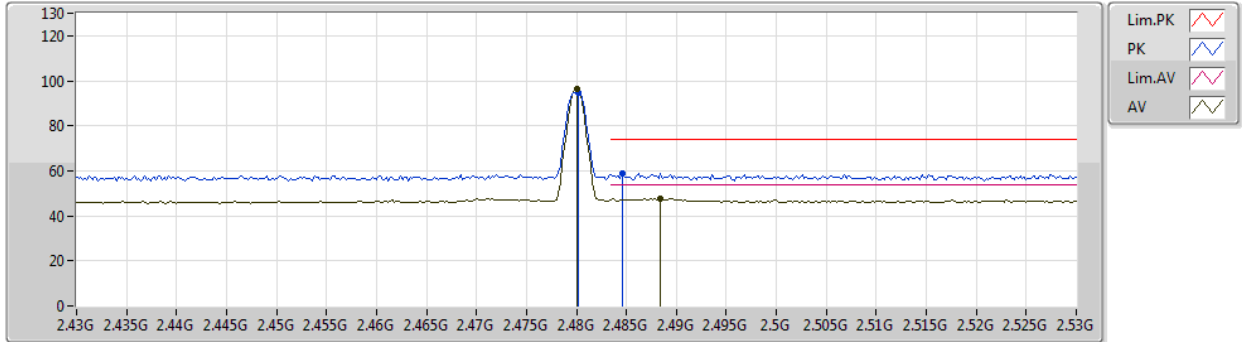


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.48G	96.22	Inf	-Inf	32.82	3	Vertical	140	2.90	-	63.40	27.60	5.22	-
AV	2.4884G	47.67	54.00	-6.33	32.83	3	Vertical	147	2.90	-	14.84	27.60	5.23	-
PK	2.4802G	94.69	Inf	-Inf	32.82	3	Vertical	142	2.90	-	61.87	27.60	5.22	-
PK	2.4846G	58.96	74.00	-15.04	32.83	3	Vertical	167	2.90	-	26.13	27.60	5.23	-

BT-LE(1Mbps)

24/07/2020

2480MHz_TX

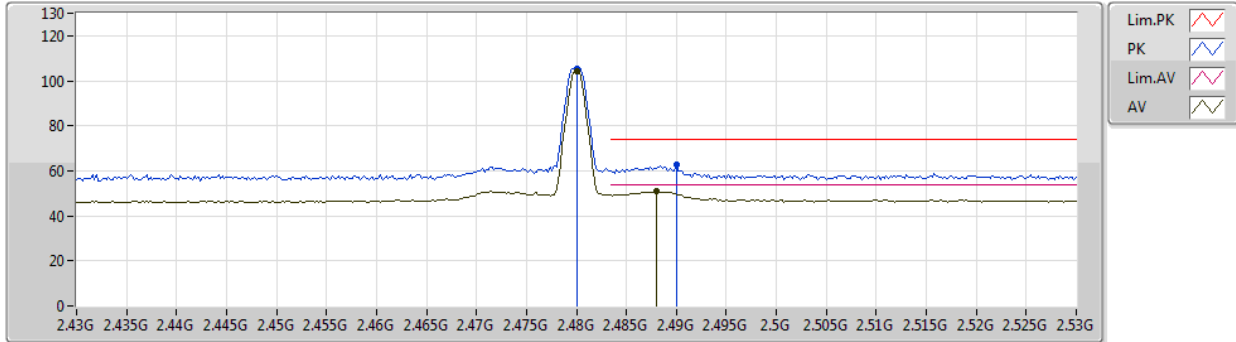


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.48G	104.41	Inf	-Inf	32.82	3	Horizontal	332	1.01	-	71.59	27.60	5.22	-
AV	2.488G	51.16	54.00	-2.84	32.83	3	Horizontal	332	1.01	-	18.33	27.60	5.23	-
PK	2.48G	105.59	Inf	-Inf	32.82	3	Horizontal	332	1.01	-	72.77	27.60	5.22	-
PK	2.49G	62.56	74.00	-11.44	32.84	3	Horizontal	332	1.01	-	29.72	27.60	5.24	-

BT-LE(1Mbps)

24/07/2020

2480MHz_TX

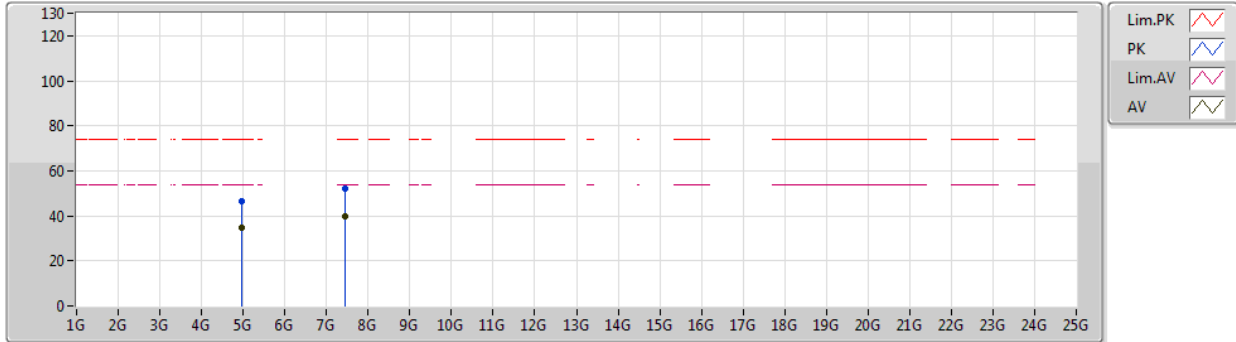


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.96324G	34.50	54.00	-19.50	8.34	3	Vertical	8	1.74	-	26.16	31.43	7.46	30.55
AV	7.44012G	40.04	54.00	-13.96	13.84	3	Vertical	302	1.50	-	26.20	36.56	8.60	31.32
PK	4.95046G	46.49	74.00	-27.51	8.31	3	Vertical	8	1.74	-	38.18	31.40	7.45	30.54
PK	7.43424G	51.91	74.00	-22.09	13.82	3	Vertical	302	1.50	-	38.09	36.54	8.60	31.32



BT-LE(1Mbps)

24/07/2020

2480MHz_TX

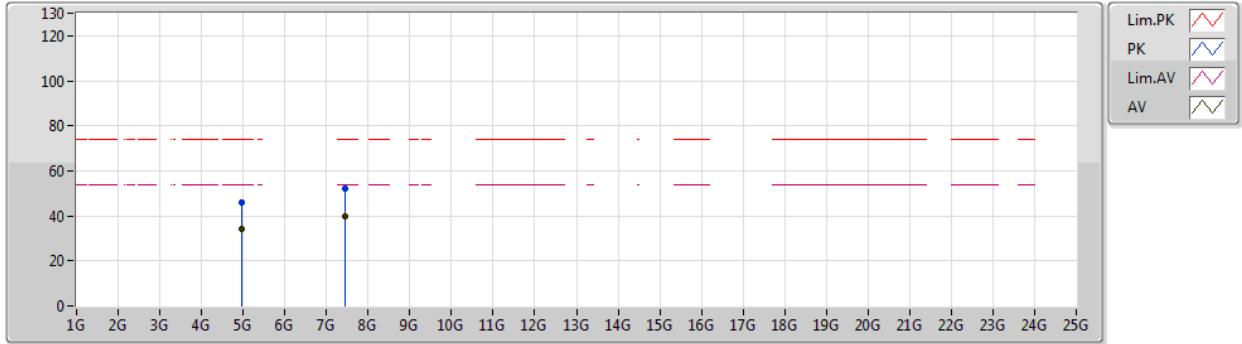

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.96606G	34.31	54.00	-19.69	8.35	3	Horizontal	229	1.65	-	25.96	31.43	7.47	30.55
AV	7.43778G	39.95	54.00	-14.05	13.83	3	Horizontal	99	1.50	-	26.12	36.55	8.60	31.32
PK	4.96306G	46.07	74.00	-27.93	8.34	3	Horizontal	229	1.65	-	37.73	31.43	7.46	30.55
PK	7.4526G	51.87	74.00	-22.13	13.88	3	Horizontal	99	1.50	-	37.99	36.60	8.60	31.32