

TEST REPORT

ACCORDING TO: FCC 47CFR part 15 subpart C §15.247 (DTS),
RSS-247 Issue 2:2017, RSS-Gen Issue 5

FOR:

Vayyar Imaging LTD.

Walabot DIY2

Models: VMPRO19EB4BAT, VMPRO19EB4WREP

FCC ID: 2AHIS-VMAKERPROW

IC: 21498-VMAKERPROW

This report is in conformity with ISO/IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Test configuration	5
6.3	Changes made in EUT	5
6.4	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-247 requirements	7
7.1	Minimum 6 dB bandwidth	7
7.2	Field strength of spurious emissions	11
7.3	Peak output power	30
7.4	Band edge radiated emissions	35
7.5	Peak spectral power density	40
8	APPENDIX A Test equipment and ancillaries used for tests	45
9	APPENDIX B Test equipment correction factors	47
10	APPENDIX C Measurement uncertainties	50
11	APPENDIX D Test laboratory description	51
12	APPENDIX E Specification references	52
13	APPENDIX F Abbreviations and acronyms	53
14	APPENDIX G Manufacturer's declaration	54



1 Applicant information

Client name: Vayyar Imaging LTD.
Address: 26 Shabazi street, Yehud, 5623000, Israel
Telephone: +972 54 333 9670
E-mail: miroslav.baryakh@vayyar.com
Contact name: Mr. Miro Baryakh

2 Equipment under test attributes

Product name: Walabot DIY2
Product type: UWB handheld device with wireless communication
Model(s): VMPRO19EB4BAT
Serial number: DCWCFE03L219000163
Hardware version: RevE
Software release: ESP_RF_test_tool_v2.5
Receipt date: 03-May-22

3 Manufacturer information

Manufacturer name: Vayyar Imaging LTD.
Address: 26 Shabazi street, Yehud, 5623000, Israel
Telephone: +972 54 333 9670
E-Mail: miroslav.baryakh@vayyar.com
Contact name: Mr. Miro Baryakh

4 Test details




Project ID: 46976
Location: Hermon Laboratories Ltd. P.O. Box 23, Binyamina 3055001, Israel
Test started: 26-May-22
Test completed: 15-Jun-22
Test specification(s): FCC 47CFR part 15 subpart C §15.247 (DTS),
RSS-247 Issue 2:2017, RSS-Gen Issue 5

5 Tests summary

Test	Status
Transmitter characteristics	
FCC Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth	Pass
FCC Section 15.247(b)3/ RSS-247 section 5.4(4), Peak output power	Pass
FCC section 15.247(i) / RSS-102 section 2.5.1, RF exposure	Pass, the exhibit to the application of certification is provided
FCC Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions	Pass
FCC Section 15.247(d)/ RSS-247 section 5.5, Emissions at band edges	Pass
FCC Section 15.247(e) / RSS-247 section 5.2(2), Peak power density	Pass
FCC section 15.203 / RSS-Gen section 8.3, Antenna requirement	Pass

The original EUT configuration was certified by FCC under FCC ID: 2AHIS-VMAKERPROW and by ISED under IC: 21498-VMAKERPROW. The new models configuration differs only by a minor layout modification in the supply network. In addition, modified USB component and updated matching network of the ESP2 IC. The models are equivalent in terms of their RF characteristics, as tuned by calibration procedure and validated by the testing, therefore the differences are minor enough to count as permissive change Class II and described in the technical description.

Testing was completed against all relevant requirements of the test standard. However, results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. H.N. Abayev, test engineer, EMC & Radio	26-May-22 – 15-Jun-22	
Reviewed by:	Mrs. S. Peysahov Sheynin, test engineer, EMC & Radio	15-Jul-22	
Approved by:	Mr. M. Nikishin, group leader, EMC & Radio	02-Aug-22	



6 EUT description

Note: The following data in this clause is provided by the customer and represents his sole responsibility


6.1 General information

The WalabotDIY2 products are using VMKAERPROUWB UWB module to characterize the environment in the vicinity of the sensor and are connected to a hosting device by WiFi/BLE communication. Utilizing the UWB module, those products are collecting and analyzing propagation information between the antennas, which is affected by the environment. The information is gathered by sequentially transmitting from the available antennas and collecting the received information at the rest of the antennas. The response information is then transmitted by WiFi to a hosting device and processed to obtain spatial information about the environment.

The acquisition is controlled by the hosting device. The hosting device may ask WalabotDIY2 to acquire multiple snapshots, so as to integrate the data into information about larger spatial extent, or to detect changes in the environment.

According to manufacturer's declaration provided in Appendix G of the test report models VMPRO19CEB4BAT and VMPRO19CEB4WREP has an identical radio frequency system and differ only in that the VMPRO19CEB4BAT has an integrated battery and can be supplied by either the battery or by external power source (through USBC port). VMPRO19EB4WREP doesn't contain battery and thus can only be powered by external power source.

6.2 Test configuration

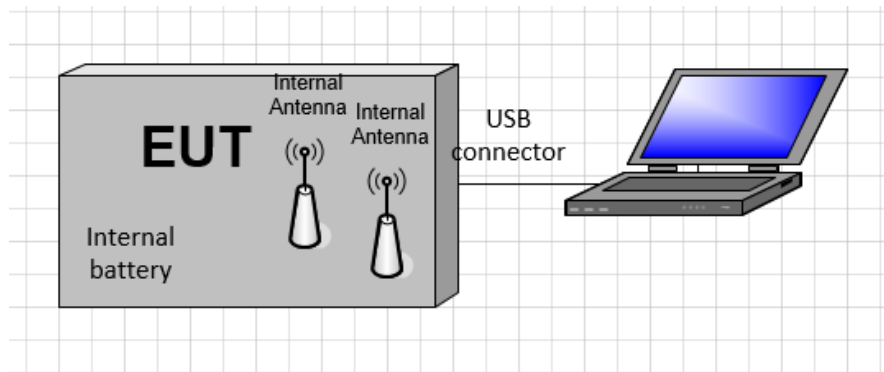

6.3 Changes made in EUT

No changes were performed in the EUT during testing.



6.4 Transmitter characteristics

Type of equipment						
V	Stand-alone (Equipment with or without its own control provisions)					
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)					
	Plug-in card (Equipment intended for a variety of host systems)					
Assigned frequency range		2400 -2483.5 MHz				
Operating frequencies		2402-2480 MHz				
Maximum rated output power		Peak output power 2.05 dBm				
Is transmitter output power variable?		V		No		
				continuous variable		
				stepped variable with stepsize		dB
				Yes		minimum RF power
				maximum RF power		dBm
Antenna connection						
unique coupling		standard connector		V	Integral	
				V	with temporary RF connector without temporary RF connector	
Antenna/s technical characteristics						
Type		Manufacturer		Model number		
integral		INPAQ		ACA-3216-A2-MC-S		
Gain		Typ peak gain: 0 dBi				
Transmitter aggregate data rate/s			1 Mbps			
Type of modulation			GFSK			
Modulating test signal (baseband)						
Transmitter power source						
V	Battery	Nominal rated voltage	3.85 V	Battery type		
V	DC	Nominal rated voltage	5.0 VDC			
	AC mains	Nominal rated voltage		Frequency	Hz	



Test specification: Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth			
Test procedure: ANSI C63.10 section 11.8.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-May-22			
Temperature: 24 °C	Relative Humidity: 60 %	Air Pressure: 1008 hPa	Power: 5 VDC
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C and RSS-247 requirements

7.1 Minimum 6 dB bandwidth

7.1.1 General

This test was performed to measure 6 dB bandwidth of the EUT carrier frequency. Specification test limits are given in Table 7.1.1.

Table 7.1.1 6 dB bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Minimum bandwidth, kHz
2400.0 – 2483.5	6.0	500.0

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

Table 7.1.2 The 99% bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points	Limit, kHz
2400.0 – 2483.5	99%	NA

7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was set to transmit modulated carrier.

7.1.2.3 The transmitter minimum 6 dB bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.3 and associated plot.

Figure 7.1.1 6 dB bandwidth test setup





Test specification: Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth			
Test procedure: ANSI C63.10 section 11.8.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-May-22			
Temperature: 24 °C	Relative Humidity: 60 %	Air Pressure: 1008 hPa	Power: 5 VDC
Remarks:			

Table 7.1.3 6 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 2400.0 – 2483.5 MHz
DETECTOR USED: Peak Maxhold
SWEEP TIME: Auto
RESOLUTION BANDWIDTH: 100 kHz
VIDEO BANDWIDTH: 300 kHz
MODULATION: GFSK
BIT RATE: 1 Mbps

Carrier frequency, MHz	6 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
Low frequency				
2402.0	646.5	500.0	146.5	Pass
Mid frequency				
2442.0	648.2	500.0	148.2	Pass
High frequency				
2480.0	646.4	500.0	146.4	Pass

Table 7.1.4 99% bandwidth test results

ASSIGNED FREQUENCY BAND: 2400.0 – 2483.5 MHz
DETECTOR USED: Peak Maxhold
SWEEP TIME: Auto
RESOLUTION BANDWIDTH: 100 kHz
VIDEO BANDWIDTH: 300 kHz
MODULATION: GFSK
BIT RATE: 1 Mbps

Carrier frequency, MHz	99% bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
Low frequency				
2402.0	1035.0	NA	NA	Pass
Mid frequency				
2442.0	1030.7	NA	NA	Pass
High frequency				
2480.0	1035.3	NA	NA	Pass

Reference numbers of test equipment used

HL 3437	HL 4136	HL 5376	HL 5644				
---------	---------	---------	---------	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth			
Test procedure: ANSI C63.10 section 11.8.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-May-22			
Temperature: 24 °C	Relative Humidity: 60 %	Air Pressure: 1008 hPa	Power: 5 VDC
Remarks:			

Plot 7.1.1 6 dB and 99% bandwidth test result at low frequency

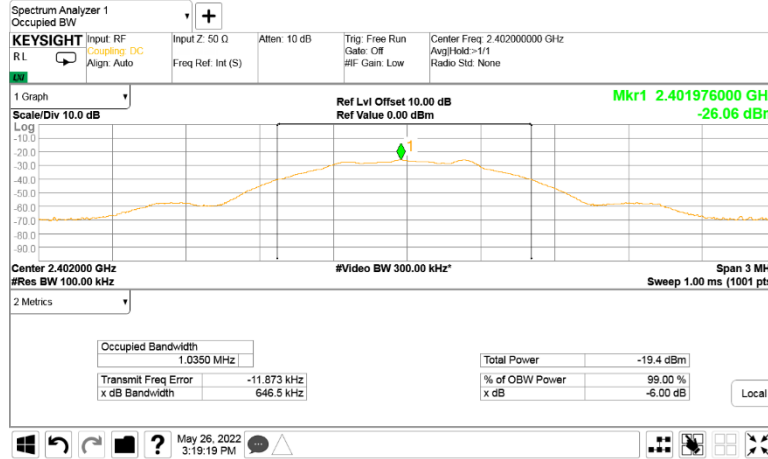

Plot 7.1.2 6 dB and 99% bandwidth test result at mid frequency

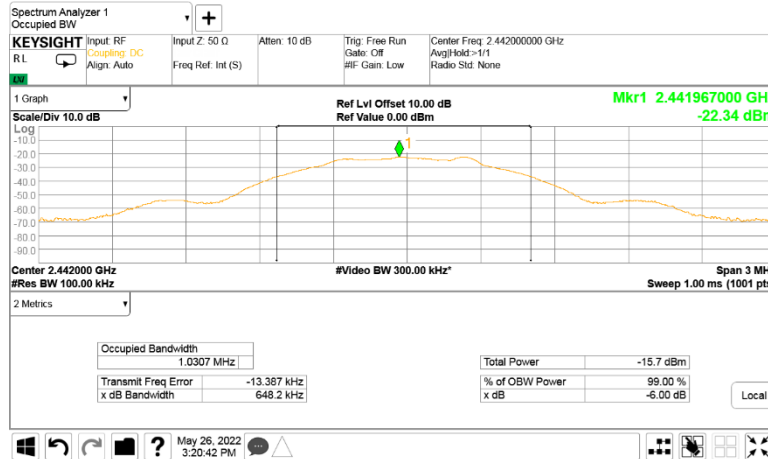




HERMON LABORATORIES

Test specification: Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth			
Test procedure: ANSI C63.10 section 11.8.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-May-22			
Temperature: 24 °C	Relative Humidity: 60 %	Air Pressure: 1008 hPa	Power: 5 VDC
Remarks:			

Plot 7.1.3 6 dB and 99% bandwidth test result at high frequency

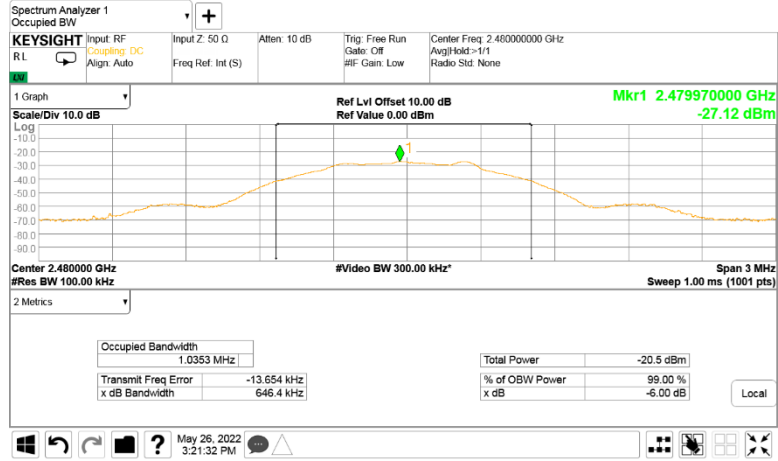



Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22 - 15-Jun-22			
Temperature: 26 °C	Relative Humidity: 26 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

7.2 Field strength of spurious emissions

7.2.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μV/m)***			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	20.0
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705	NA	73.8 – 63.0**	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
1000 – 10 th harmonic	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lims}_2 = \text{Lims}_1 + 40 \log (S_1/S_2),$$

where S₁ and S₂ – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.2.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.

7.2.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.2.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

7.2.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.2.3.1 The EUT was set up as shown in Figure 7.2.2, Figure 1.1.3, energized and the performance check was conducted.

7.2.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.2.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.



Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22 - 15-Jun-22			
Temperature: 26 °C	Relative Humidity: 26 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

Figure 7.2.1 Setup for spurious emission field strength measurements below 30 MHz


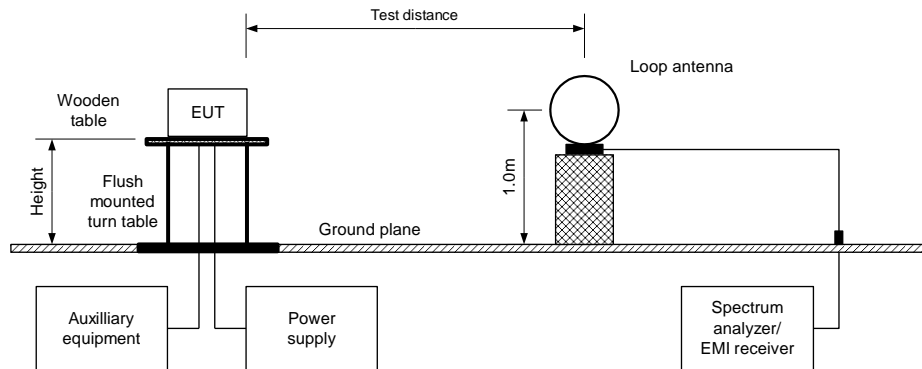



Figure 7.2.2 Setup for spurious emission field strength measurements from 30 to 1000 MHz



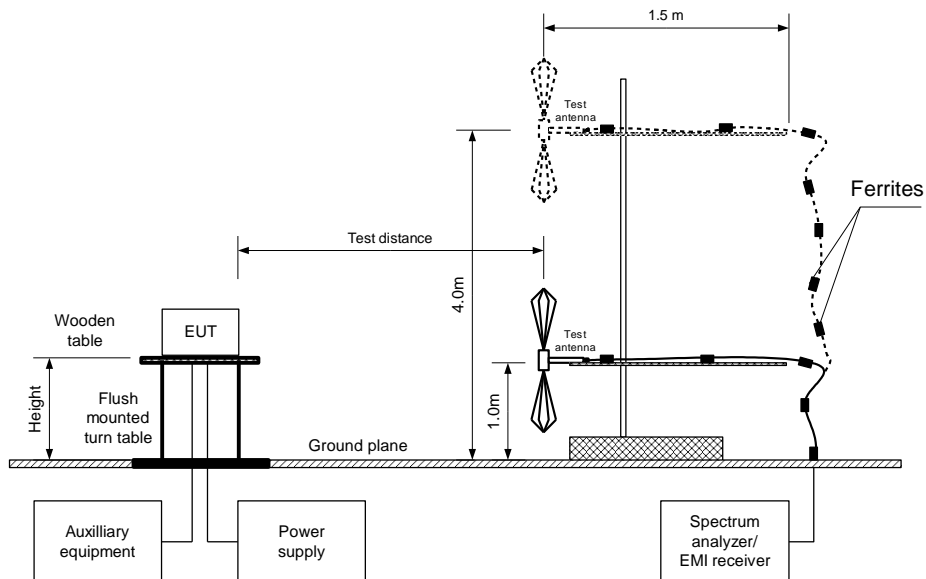

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22 - 15-Jun-22			
Temperature: 26 °C	Relative Humidity: 26 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

Figure 7.2.3 Setup for spurious emission field strength measurements above 1000 MHz

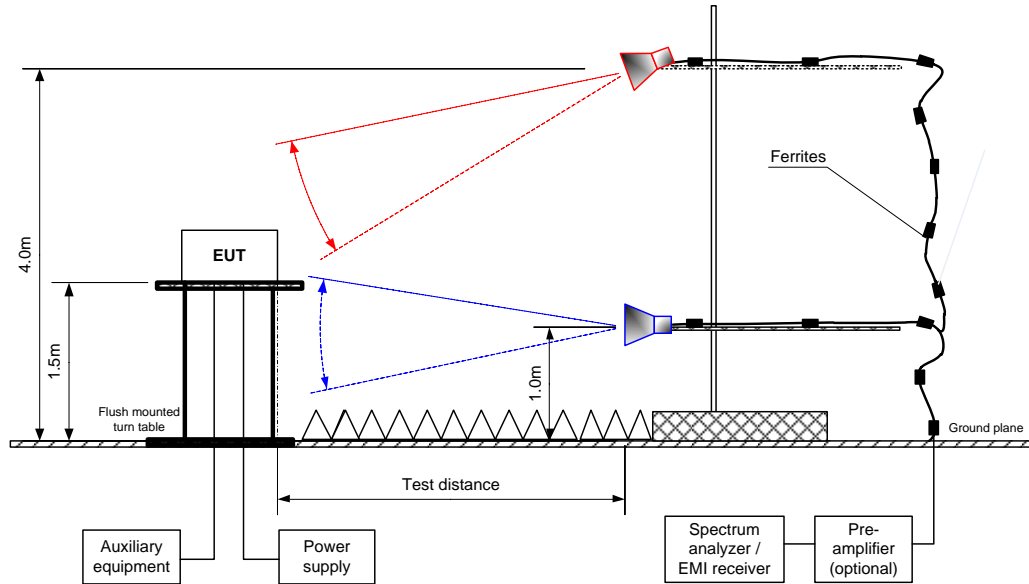



Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22 - 15-Jun-22			
Temperature: 26 °C	Relative Humidity: 26 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

Table 7.2.2 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY: 2400.0 – 2483.5 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 - 25000 MHz
 TEST DISTANCE: 3 m
 MODULATION: GFSK
 BIT RATE: 1 Mbps
 DUTY CYCLE: 100 %
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)

Frequency, MHz	Field strength of spurious, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(μV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
Low carrier frequency									
All emissions were greater than 20 dB below the limit									Pass
Mid carrier frequency									
All emissions were greater than 20 dB below the limit									Pass
High carrier frequency									
All emissions were greater than 20 dB below the limit									Pass

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Attenuation below carrier – specification limit.



Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22 - 15-Jun-22			
Temperature: 26 °C	Relative Humidity: 26 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

Table 7.2.3 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY: 2400.0 – 2483.5 MHz
 INVESTIGATED FREQUENCY RANGE: 1000 - 25000 MHz
 TEST DISTANCE: 3 m
 MODULATION: GFSK
 BIT RATE: 1 Mbps
 DUTY CYCLE: 100 %
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength(VBW=3 MHz)			Average field strength(VBW=10 Hz)				Verdict
	Polarization	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Calculated, dB(µV/m)	Limit, dB(µV/m)	Margin, dB***	
Low carrier frequency 2402 MHz											
All emissions were more than 20 dB below the limit											Pass
Mid carrier frequency 2442 MHz											
4883.253	Vertical	1.50	56	51.03	74.0	-22.97	46.79	NA	54.0	-7.21	Pass
High carrier frequency 2480 MHz											
4959.413	Vertical	1.50	61	54.39	74.0	-19.61	49.90	NA	54.0	-4.10	Pass
7439.147	Vertical	1.50	180	51.02	74.0	-22.98	43.38	NA	54.0	-10.62	

*- EUT front panel refers to 0 degrees position of turntable.
 **- Margin = Measured field strength - specification limit.
 ***- Margin = Calculated field strength - specification limit,
 where Calculated field strength = Measured field strength + average factor.

Table 7.2.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
NA	NA	NA	NA	NA	NA

*- Average factor was calculated as follows
 for pulse train shorter than 100 ms:

$$Average\ factor = 20 \times \log_{10} \left(\frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{Train\ duration} \times Number\ of\ bursts\ within\ pulse\ train \right)$$

 for pulse train longer than 100 ms:

$$Average\ factor = 20 \times \log_{10} \left(\frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{100ms} \times Number\ of\ bursts\ within\ 100ms \right)$$



Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22 - 15-Jun-22			
Temperature: 26 °C	Relative Humidity: 26 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

Table 7.2.5 Field strength of spurious emissions below 1 GHz within restricted bands

ASSIGNED FREQUENCY: 2400.0 – 2483.5 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 - 25000 MHz
 TEST DISTANCE: 3 m
 MODULATION: GFSK
 BIT RATE: 1 Mbps
 DUTY CYCLE: 100 %
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
Low carrier frequency								
120.009	30.06	28.35	43.5	-15.15	Vertical	1.02	-31	Pass
400.002	39.26	38.00	46.0	-8.00	Horizontal	1.04	-31	
Mid carrier frequency								
400.007	39.46	38.14	46.0	-7.86	Horizontal	1.02	-31	Pass
High carrier frequency								
119.994	30.03	28.42	43.5	-15.08	Vertical	1.00	-34	Pass
399.996	39.59	38.06	46.0	-7.94	Horizontal	1.04	-33	

*- Margin = Measured emission - specification limit.
 **- EUT front panel refer to 0 degrees position of turntable.



HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22 - 15-Jun-22			
Temperature: 26 °C	Relative Humidity: 26 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

Table 7.2.6 Restricted bands according to FCC section 15.205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Table 7.2.7 Restricted bands according to RSS-Gen

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.1905	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.29 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6

Reference numbers of test equipment used

HL 0446	HL 3903	HL 4360	HL 4933	HL 4956	HL 5288		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.





HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22 - 15-Jun-22			
Temperature: 26 °C	Relative Humidity: 26 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

Plot 7.2.1 Radiated emission measurements at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

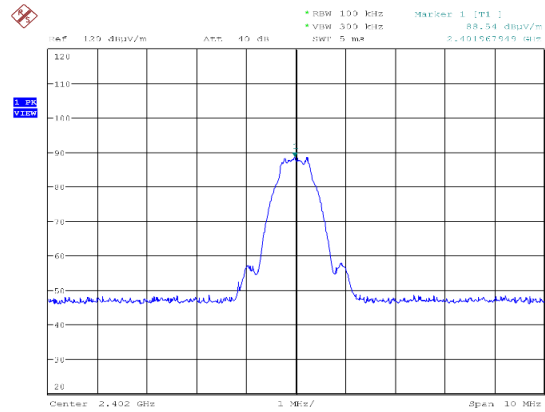
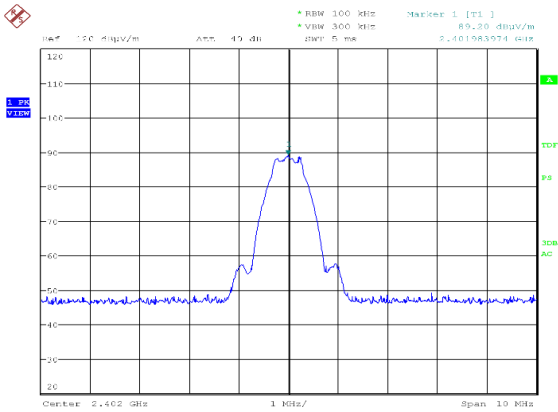


Date: 13 JUN 2022 16:20:07

Date: 13 JUN 2022 16:25:48

Plot 7.2.2 Radiated emission measurements at the mid carrier frequency

TEST SITE: anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

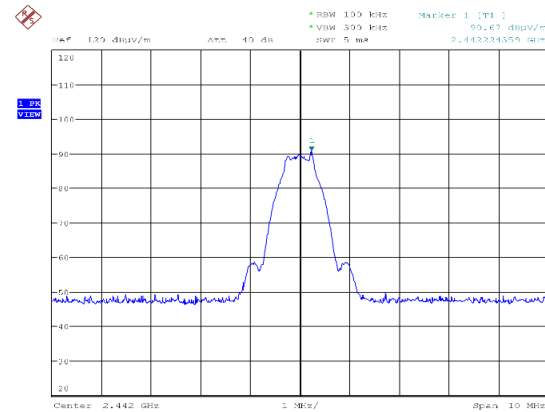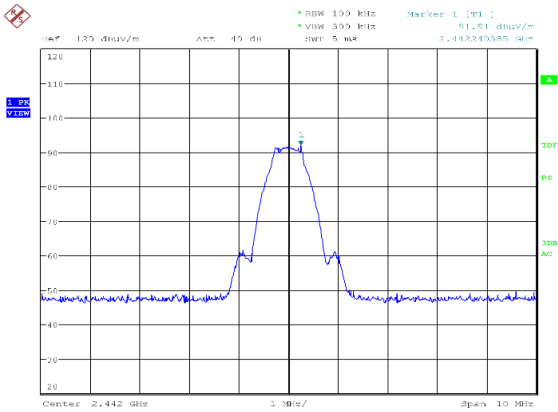

Date: 13 JUN 2022 16:31:26

Date: 13 JUN 2022 16:33:22




HERMON LABORATORIES


Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22 - 15-Jun-22			
Temperature: 26 °C	Relative Humidity: 26 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

Plot 7.2.3 Radiated emission measurements at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

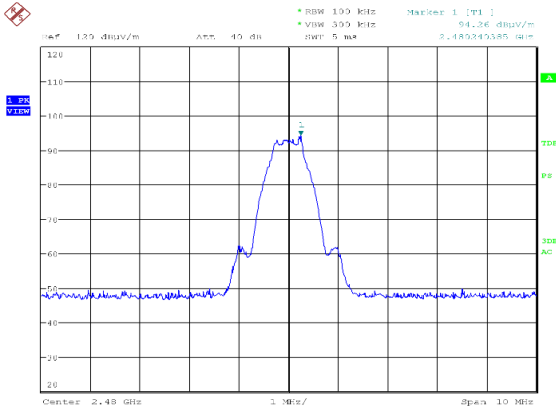

Date: 13 JUN 2022 16:41:01

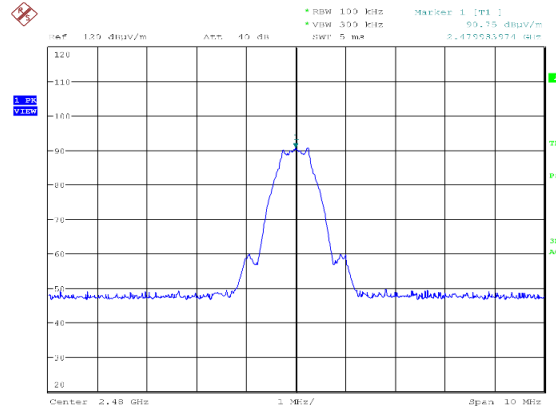

Date: 13 JUN 2022 16:57:57




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22 - 15-Jun-22			
Temperature: 26 °C	Relative Humidity: 26 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			


Plot 7.2.4 Radiated emission measurements from 9 kHz to 30 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

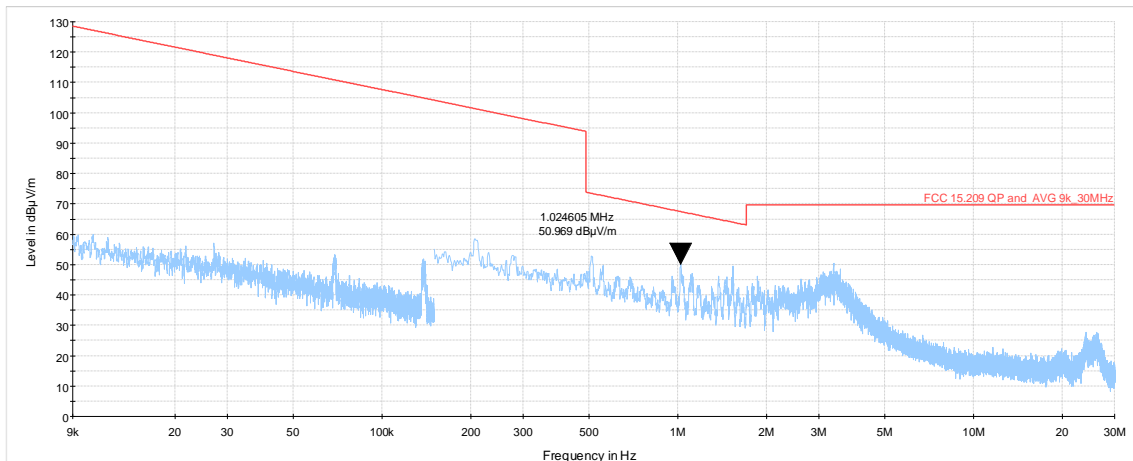

Plot 7.2.5 Radiated emission measurements from 9 kHz to 30 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

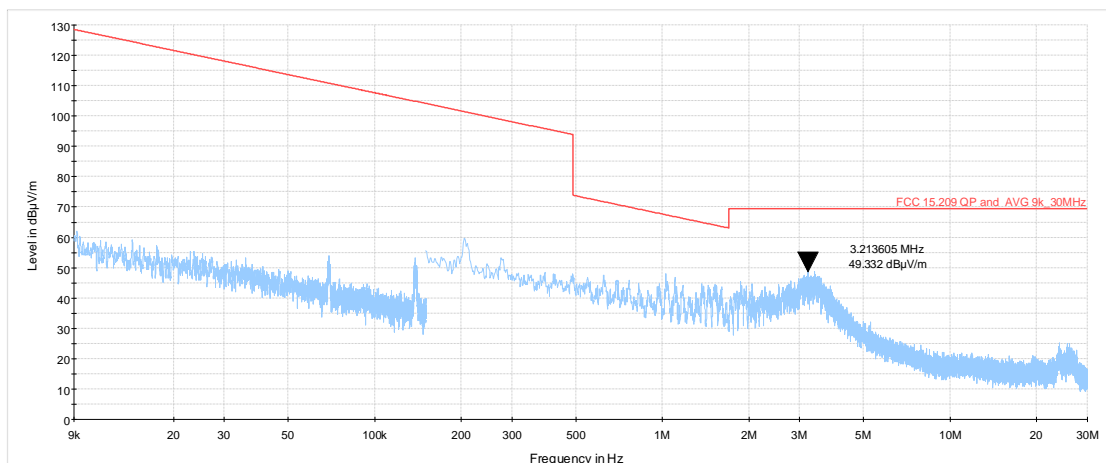




Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22 - 15-Jun-22			
Temperature: 26 °C	Relative Humidity: 26 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

Plot 7.2.6 Radiated emission measurements from 9 kHz to 30 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

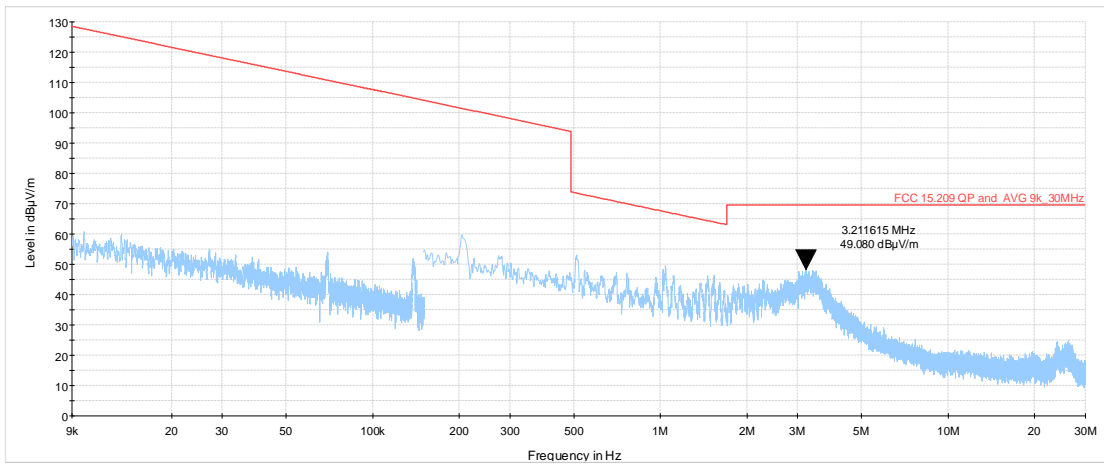




Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22 - 15-Jun-22			
Temperature: 26 °C	Relative Humidity: 26 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			


Plot 7.2.7 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

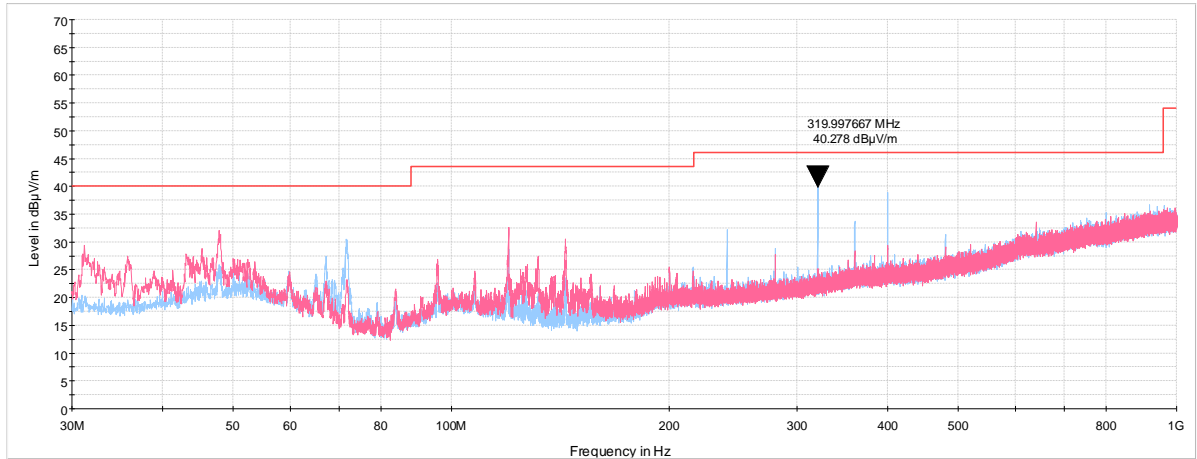

Plot 7.2.8 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

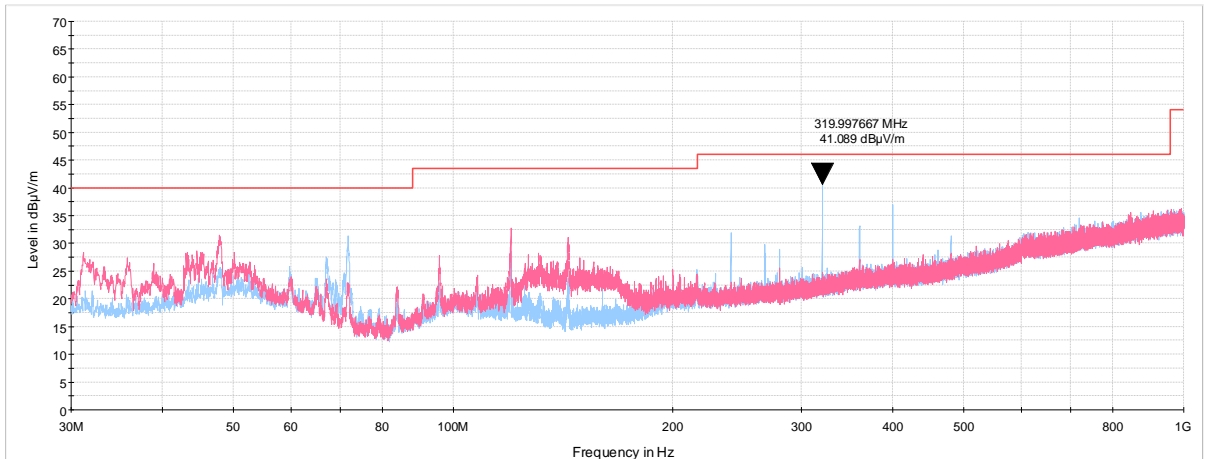




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22 - 15-Jun-22			
Temperature: 26 °C	Relative Humidity: 26 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

Plot 7.2.9 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

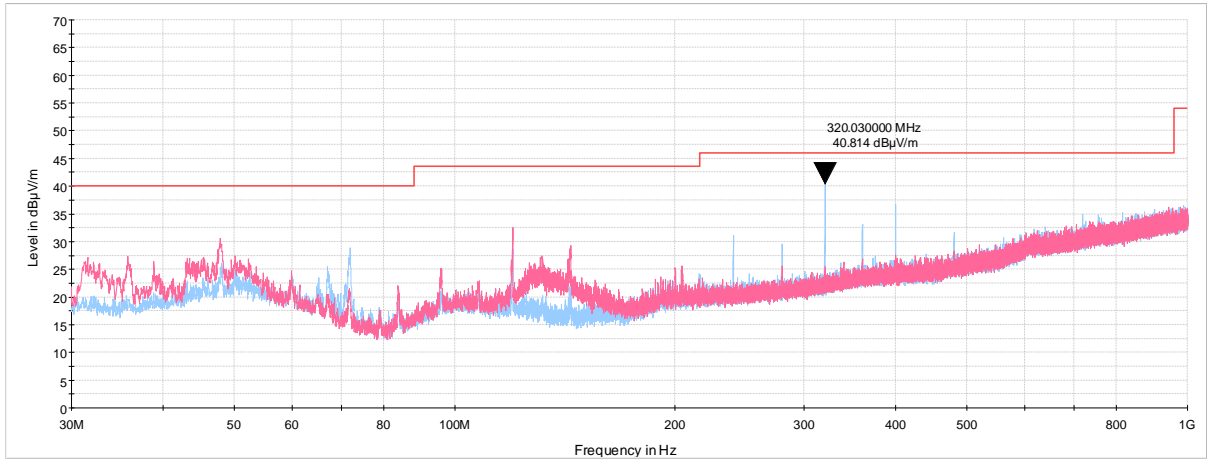




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22 - 15-Jun-22			
Temperature: 26 °C	Relative Humidity: 26 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			


Plot 7.2.10 Radiated emission measurements from 1000 to 4400 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

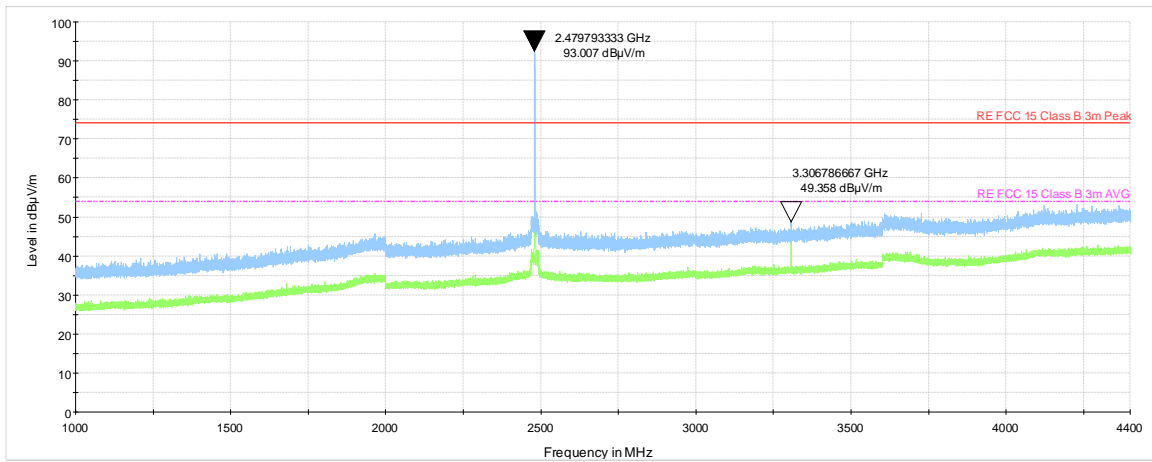

Plot 7.2.11 Radiated emission measurements from 1000 to 4400 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

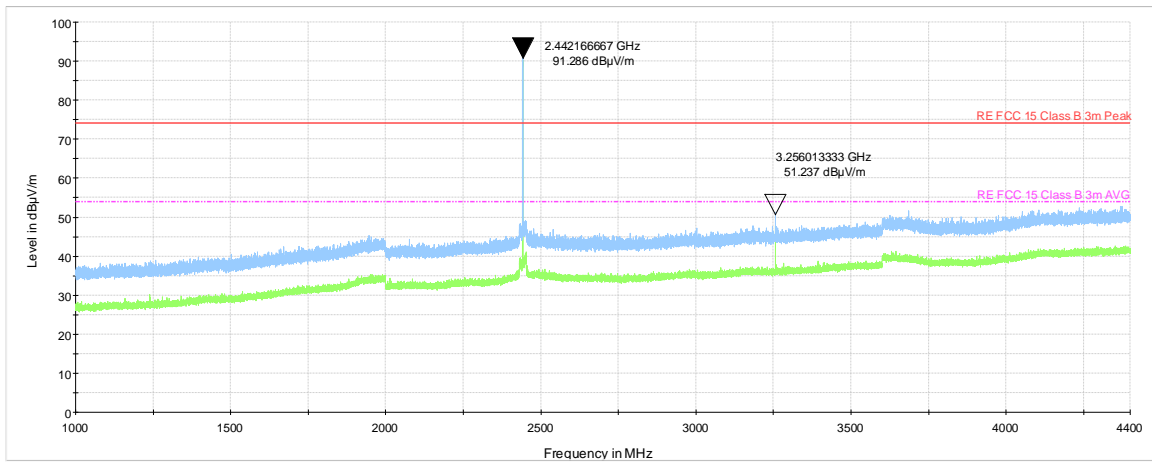




Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22 - 15-Jun-22			
Temperature: 26 °C	Relative Humidity: 26 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

Plot 7.2.12 Radiated emission measurements from 1000 to 4400 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

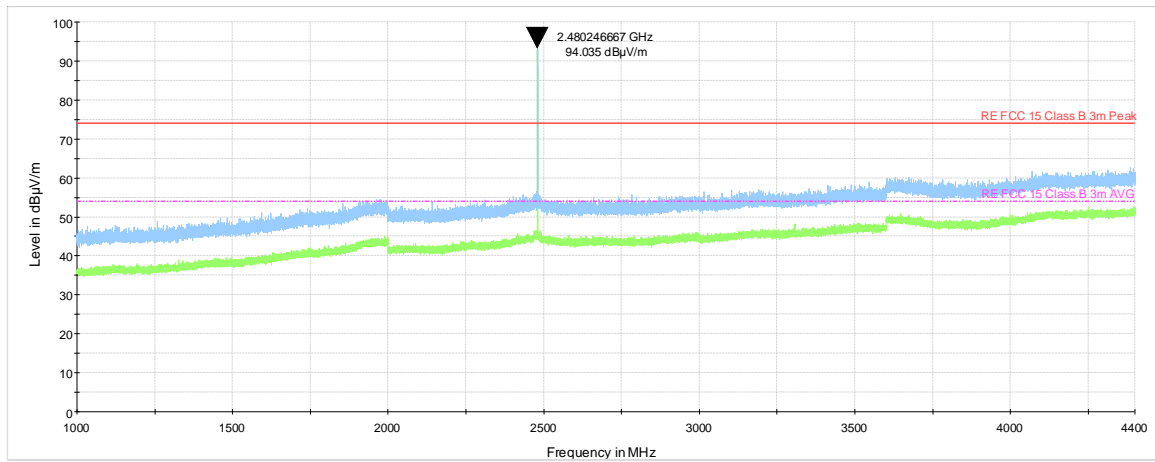




Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22 - 15-Jun-22			
Temperature: 26 °C	Relative Humidity: 26 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			


Plot 7.2.13 Radiated emission measurements from 4400 to 18000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

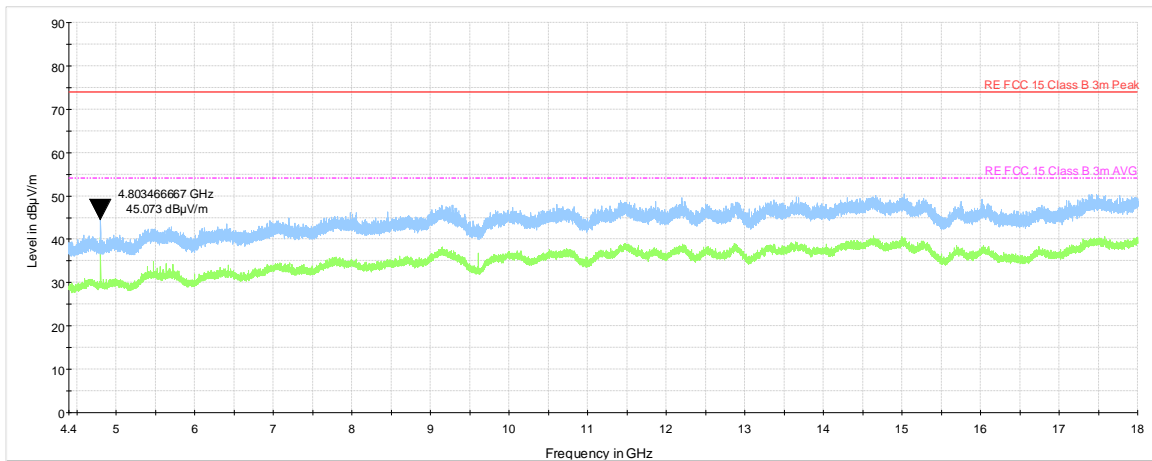

Plot 7.2.14 Radiated emission measurements from 4400 to 18000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

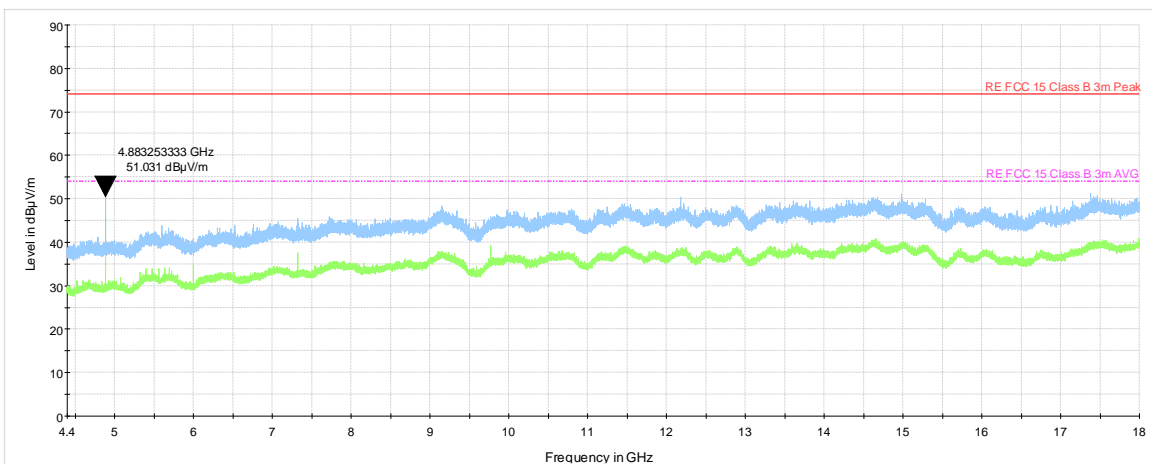




Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22 - 15-Jun-22			
Temperature: 26 °C	Relative Humidity: 26 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

Plot 7.2.15 Radiated emission measurements from 4400 to 18000MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

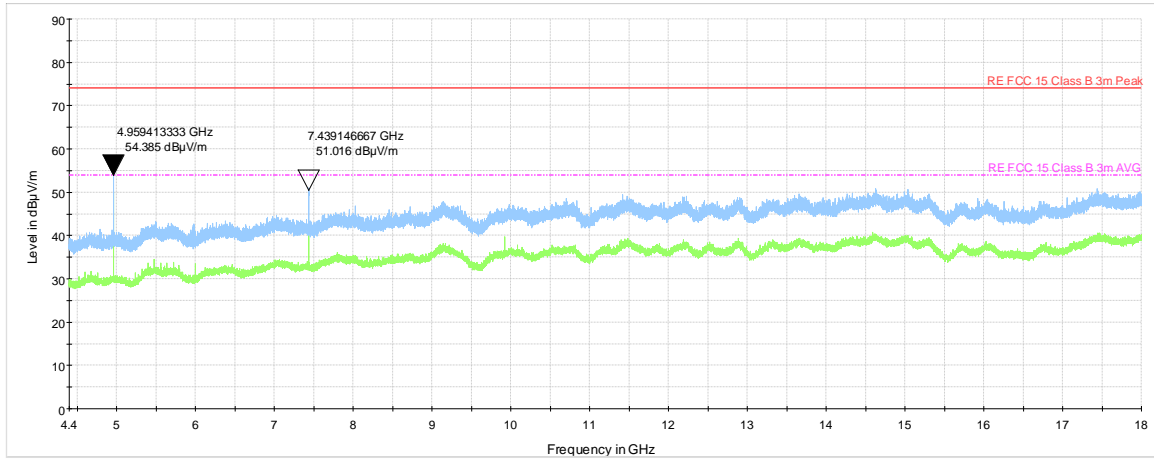




Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22 - 15-Jun-22			
Temperature: 26 °C	Relative Humidity: 26 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			


Plot 7.2.16 Radiated emission measurements from 18 to 25 GHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

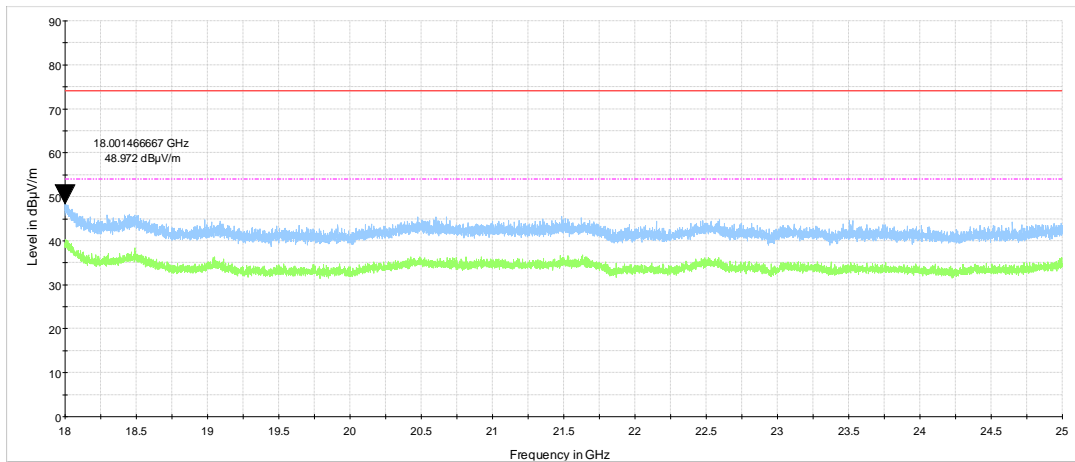

Plot 7.2.17 Radiated emission measurements from 18 to 25 GHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

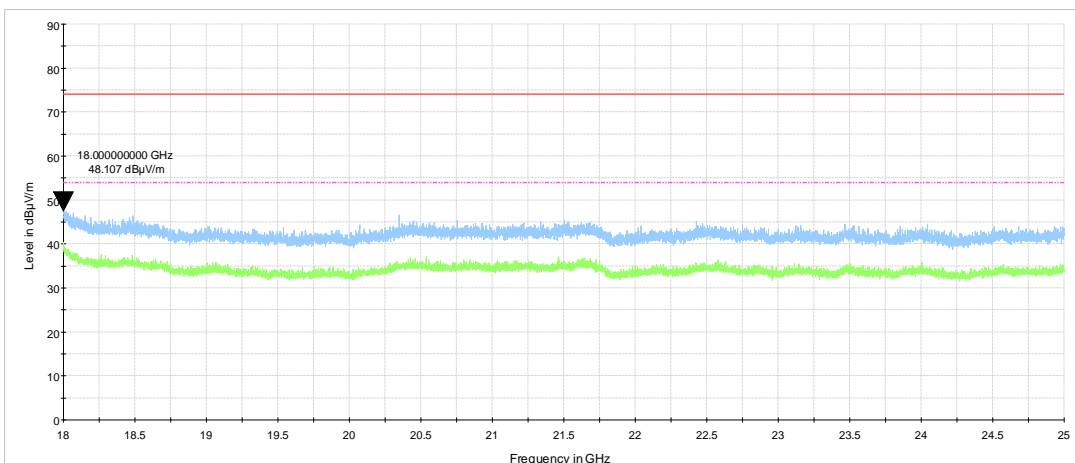




Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22 - 15-Jun-22			
Temperature: 26 °C	Relative Humidity: 26 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

Plot 7.2.18 Radiated emission measurements from 18 to 25 GHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

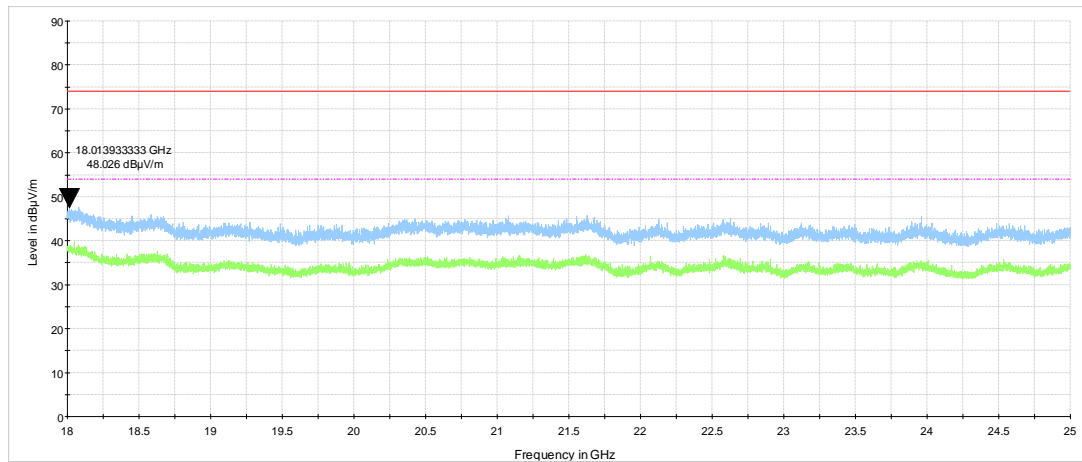



Test specification: Section 15.247(b)3 / RSS-247 section 5.4(4), Maximum output power			
Test procedure: ANSI C63.10 sections 11.9.2.2.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

7.3 Peak output power

7.3.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Peak output power limits

Assigned frequency range, MHz	Maximum antenna gain, dBi	Peak output power*		Equivalent field strength limit @ 3m, dB(μV/m)**
		W	dBm	
2400.0 – 2483.5	6.0	1.0	30.0	131.2

*- The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

- by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
- without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
- by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

** - Equivalent field strength limit was calculated from the peak output power as follows: $E = \sqrt{30 \times P \times G} / r$, where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

7.3.2 Test procedure

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.

7.3.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.3.2.3 The resolution bandwidth of spectrum analyzer was set wider than 6 dB bandwidth of the EUT and the field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 3600 and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.3.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.3.2 and associated plots.

7.3.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.

The above equation was converted in logarithmic units for 3 m test distance:


$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V/m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$

7.3.2.6 The worst test results (the lowest margins) were recorded in Table 7.3.2.



Test specification: Section 15.247(b)3 / RSS-247 section 5.4(4), Maximum output power			
Test procedure: ANSI C63.10 sections 11.9.2.2.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

Figure 7.3.1 Setup for carrier field strength measurements

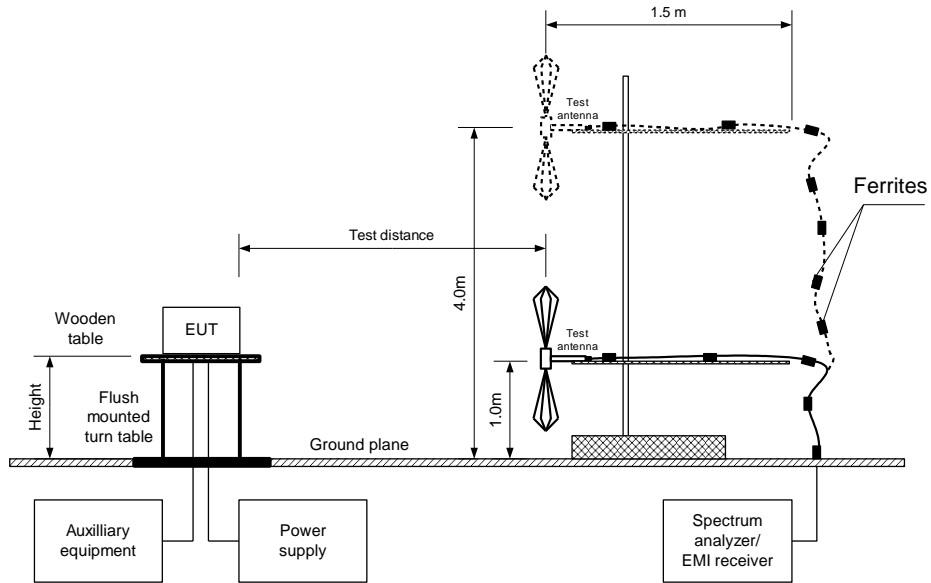



Test specification: Section 15.247(b)3 / RSS-247 section 5.4(4), Maximum output power			
Test procedure: ANSI C63.10 sections 11.9.2.2.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

Table 7.3.2 Peak output power test results

ASSIGNED FREQUENCY: 2400.0 – 2483.5 MHz
TEST DISTANCE: 3 m
TEST SITE: Semi anechoic chamber
EUT HEIGHT: 1.5 m
DETECTOR USED: Peak
TEST ANTENNA TYPE: Double ridged guide (above 1000 MHz)
TRANSMITTER OUTPUT POWER SETTINGS: Maximum
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: 3 MHz
VIDEO BANDWIDTH: 10 MHz

MODULATION: GFSK
BITRATE: 1 Mbps

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
2402.0	93.17	Vertical	1.10	110	0	-2.03	30	-32.03	Pass
2442.0	95.29	Vertical	1.50	120	0	0.09	30	-29.91	Pass
2480.0	97.25	Vertical	1.50	80	0	2.05	30	-27.95	Pass

*- EUT front panel refer to 0 degrees position of turntable.

** - Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$, where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(μV/m) - Transmitter antenna gain in dBi - 95.2 dB*

*** - Margin = Peak output power – specification limit.

Note: Maximum peak output power was obtained at Unom (115%Unom, 85%Unom) input power voltage.

Reference numbers of test equipment used

HL 4355	HL 4933	HL 5410	HL 5902				
---------	---------	---------	---------	--	--	--	--


Full description is given in Appendix A.



HERMON LABORATORIES


Test specification: Section 15.247(b)3 / RSS-247 section 5.4(4), Maximum output power			
Test procedure: ANSI C63.10 sections 11.9.2.2.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

Plot 7.3.1 Field strength of carrier at low frequency

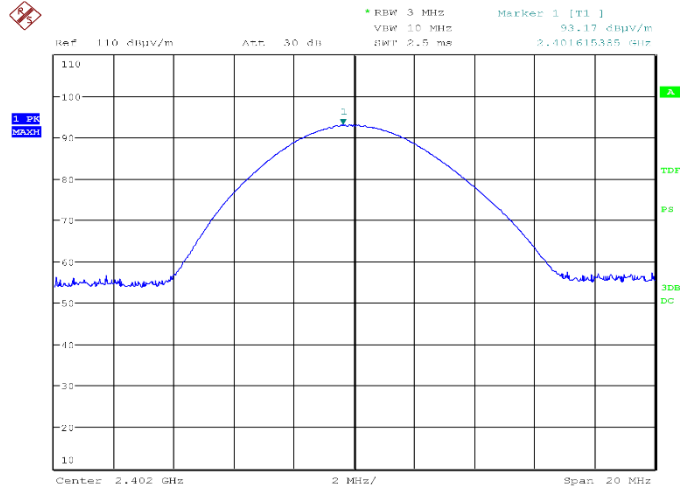

Date: 21.JUL.2022 17:27:40

Plot 7.3.2 Field strength of carrier at mid frequency

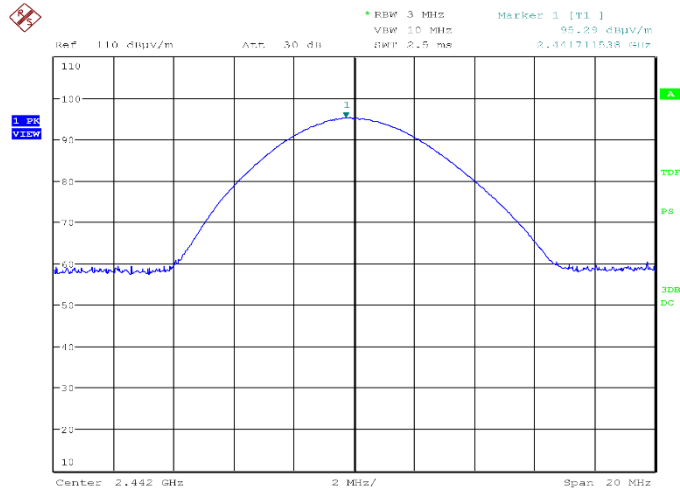


Date: 21.JUL.2022 17:21:33



HERMON LABORATORIES

Test specification: Section 15.247(b)3 / RSS-247 section 5.4(4), Maximum output power			
Test procedure: ANSI C63.10 sections 11.9.2.2.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

Plot 7.3.3 Field strength of carrier at high frequency

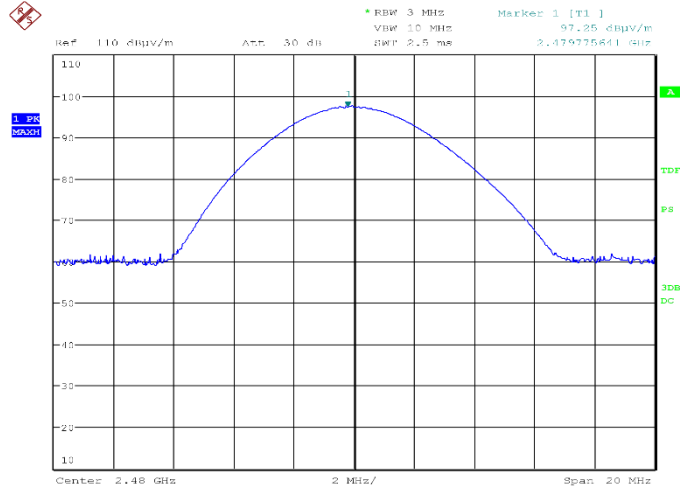

Date: 21.JUL.2022 17:24:28



Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

7.4 Band edge radiated emissions

7.4.1 General

This test was performed to measure emissions, radiated from the EUT at the assigned frequency band edges. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Band edge emission limits

Output power	Assigned frequency, MHz	Attenuation below carrier*, dBc	Field strength at 3 m within restricted bands, dB(µV/m)	
			Peak	Average
Peak	2400.0 – 2483.5	20.0	74.0	54.0

* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.


7.4.2 Test procedure

- 7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized normally modulated at the maximum data rate and its proper operation was checked.
- 7.4.2.2 The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.
- 7.4.2.3 The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.4.2.4 The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 7.4.2.5 The maximum band edge emission and modulation product outside of the band were measured as provided in Table 7.4.2 and associated plots and referenced to the highest emission level measured within the authorized band.
- 7.4.2.6 The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.
- 7.4.2.7 The above procedure was repeated with the frequency hopping function enabled.



Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

Figure 7.4.1 Band edge emission test setup

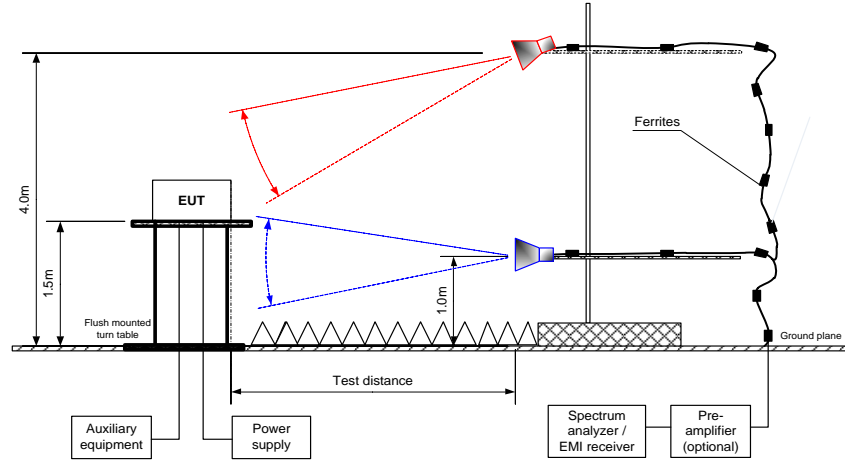



Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

Table 7.4.2 Band edge emission outside restricted bands test results

ASSIGNED FREQUENCY RANGE: 2400.0 – 2483.5 MHz
DETECTOR USED: Peak
TRANSMITTER OUTPUT POWER SETTINGS: Maximum
RESOLUTION BANDWIDTH: 100 kHz
VIDEO BANDWIDTH: ≥ RBW

MODULATION/BITRATE: GFSK / 1 Mbps

Frequency, MHz	Band edge emission, dB(μV/m)	Emission at carrier, dB(μV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
2400.000	40.97	88.36	47.39	20.0	27.39	Pass

*- Margin = Attenuation below carrier – specification limit.

Table 7.4.3 Band edge emission inside restricted bands test results

ASSIGNED FREQUENCY RANGE: 2400.0 – 2483.5 MHz
DETECTOR USED: Peak
TRANSMITTER OUTPUT POWER SETTINGS: Maximum
VIDEO BANDWIDTH: ≥ RBW

MODULATION/BITRATE: GFSK / 1 Mbps

Frequency, MHz	Peak field strength(VBW=3 MHz)			Average field strength(VBW=1 kHz)			Verdict
	Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	
2389.86	39.76	74.0	-34.24	NA	54.0	NA	Pass
2489.43	51.87	74.0	-22.13	NA	54.0	NA	Pass

Reference numbers of test equipment used


HL 4355	HL 4933	HL 5410	HL 5902				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

Plot 7.4.1 The highest emission level within restricted band at low carrier frequency

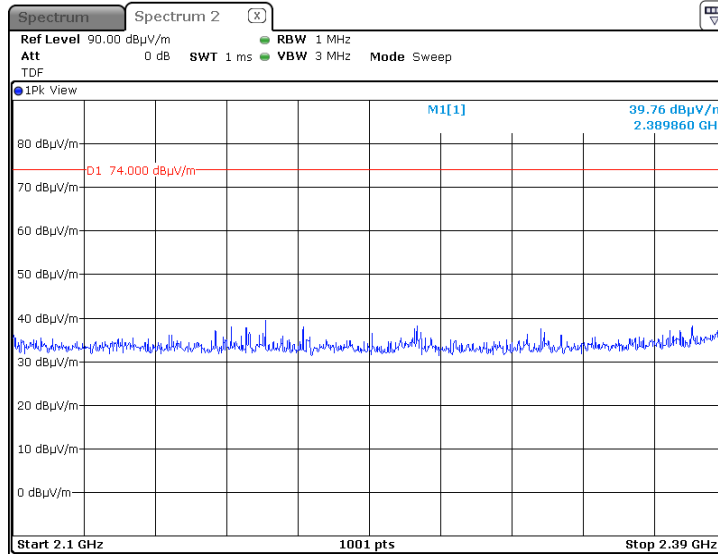

Plot 7.4.2 The highest emission level outside restricted band at low carrier frequency

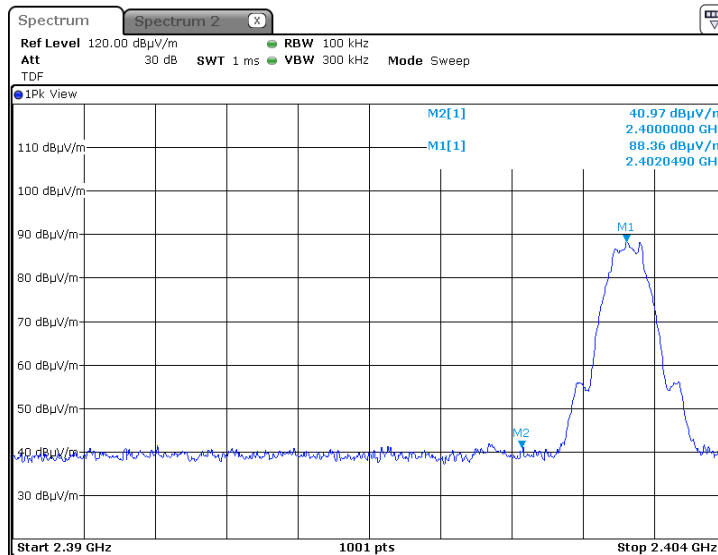




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

Plot 7.4.3 The highest emission level within restricted band at high carrier frequency

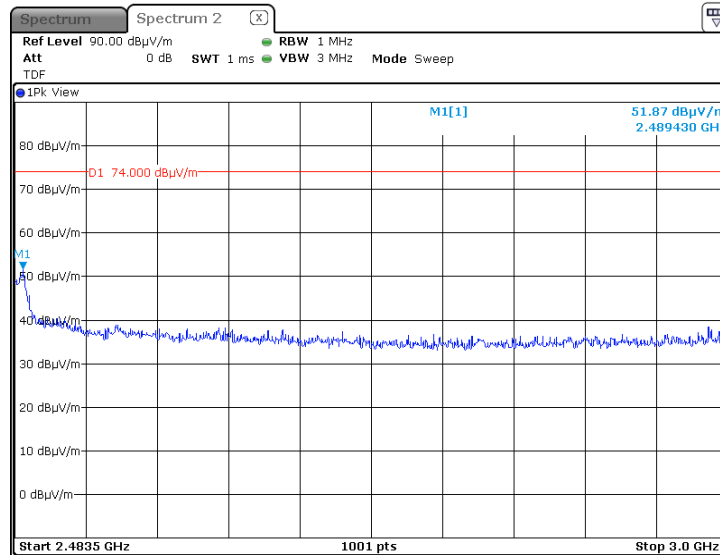



Test specification: Section 15.247(e) / RSS-247 section 5.2(2), Maximum power spectral density			
Test procedure: ANSI C63.10 section 11.10.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

7.5 Peak spectral power density

7.5.1 General

This test was performed to measure the peak spectral power density radiated by the transmitter RF antenna. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Peak spectral power density limits

Assigned frequency range, MHz	Measurement bandwidth, kHz	Peak spectral power density, dBm	Equivalent Peak spectral power density limit @ 3m, dB(µV/m)*
902.0 – 928.0	3.0	8.0	103.2
2400.0 – 2483.5			
5725.0 – 5850.0			

* - Equivalent Peak spectral power density limit was calculated from the peak spectral power density as follows: $E = \sqrt{30 \times P} / r$, where P is peak spectral power density and r is antenna to EUT distance in meters.

7.5.2 Test procedure for Peak spectral power density measurements

7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.

7.5.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.5.2.3 The Peak spectral power density of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.


7.5.2.4 The frequency span of spectrum analyzer was set to capture the entire 6 dB band of the transmitter, in peak hold mode with resolution bandwidth set to 3.0 kHz, video bandwidth wider than resolution bandwidth, auto sweep time and sufficient number of sweeps was allowed for trace stabilization. The spectrum lines spacing was verified to be wider than 3 kHz. Otherwise the resolution bandwidth was reduced until individual spectrum lines were resolved and the power of individual spectrum lines was integrated over 3 kHz band.

7.5.2.5 The peak of emission was zoomed with span set just wide enough to capture the emission peak area and sweep time was set equal to span width divided by resolution bandwidth. Spectrum analyzer was set in peak hold mode, sufficient number of sweeps was allowed for trace stabilization and peak spectral power density was measured as provided in Table 7.5.2 and associated plots.



Test specification: Section 15.247(e) / RSS-247 section 5.2(2), Maximum power spectral density			
Test procedure: ANSI C63.10 section 11.10.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

Figure 7.5.1 Setup for carrier Peak spectral power density measurements

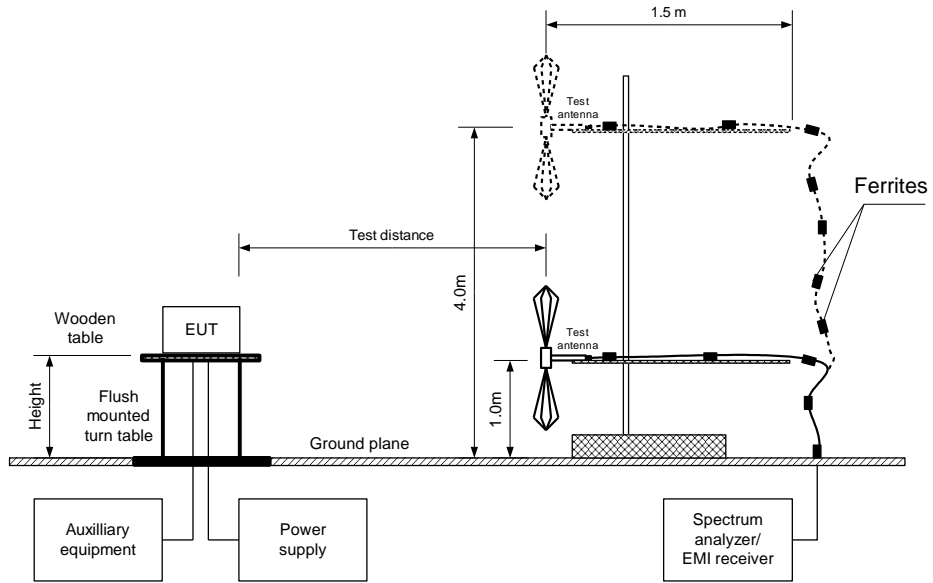



Test specification: Section 15.247(e) / RSS-247 section 5.2(2), Maximum power spectral density			
Test procedure: ANSI C63.10 section 11.10.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

Table 7.5.2 Peak spectral power density measurement of peak spectral power density

ASSIGNED FREQUENCY: 2400.0 – 2483.5 MHz
TEST DISTANCE: 3 m
TEST SITE: Semi anechoic chamber
EUT HEIGHT: 1.5 m
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: 100 kHz
VIDEO BANDWIDTH: 1 MHz
TEST ANTENNA TYPE: Double ridged guide (above 1000 MHz)
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

MODULATION/BITRATE: GFSK / 1 Mbps

Frequency, MHz	Peak spectral power density, dB(µV/m)	EUT antenna gain, dBi	Limit, dB(µV/m)	Margin, dB*	Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
2402.0	88.37	0	103.2	-14.83	Vertical	1.50	120	Pass
2442.0	91.58	0	103.2	-11.62	Vertical	1.40	115	Pass
2480.0	94.78	0	103.2	-8.42	Vertical	1.10	110	Pass

*- Margin = Peak spectral power density - EUT antenna gain - 95.2 - calculated Peak spectral power density limit.

** - EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used


HL 4355	HL 4933	HL 5410	HL 5902				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.



Test specification: Section 15.247(e) / RSS-247 section 5.2(2), Maximum power spectral density			
Test procedure: ANSI C63.10 section 11.10.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

Plot 7.5.1 Peak spectral power density of carrier at low frequency

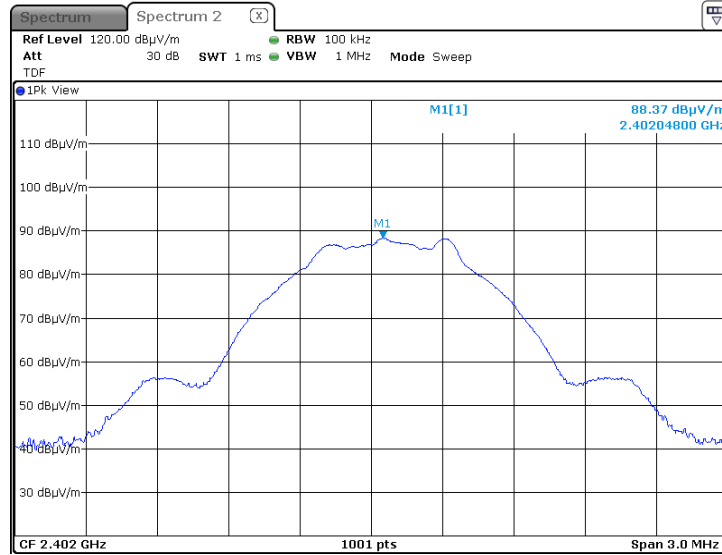

Plot 7.5.2 Peak spectral power density of carrier at mid frequency






HERMON LABORATORIES

Test specification: Section 15.247(e) / RSS-247 section 5.2(2), Maximum power spectral density			
Test procedure: ANSI C63.10 section 11.10.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jun-22			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1010 hPa	Power: 5 VDC
Remarks:			

Plot 7.5.3 Peak spectral power density of carrier at high frequency

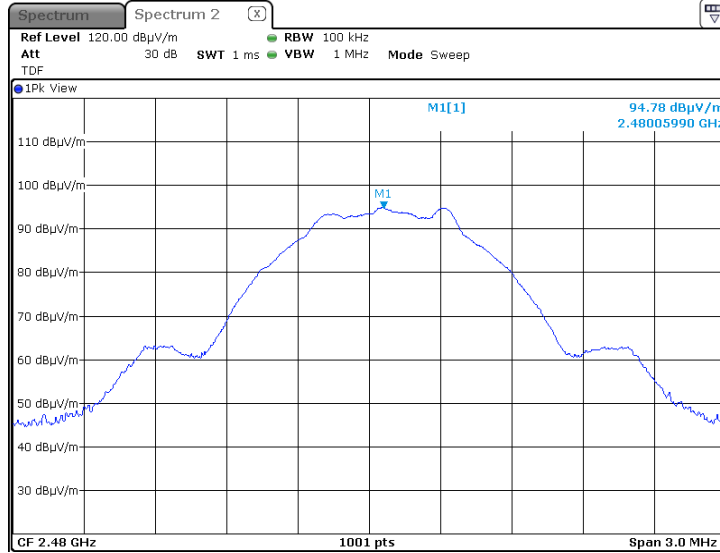

**8 APPENDIX A Test equipment and ancillaries used for tests**

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0446	Antenna, Loop, Active, 10 (9) kHz - 30 MHz	EMCO	6502	2857	28-Feb-22	28-Feb-23
3437	Precision Fixed Attenuator, 50 Ohm, 5 W, 10 dB, DC to 18 GHz	Mini-Circuits	BW-S10W5+	NA	13-Sep-21	13-Sep-22
3903	Microwave Cable Assembly, 40.0 GHz, 1.5 m, SMA/SMA	Huber-Suhner	SUCOFL EX 102A	1226/2A	07-Apr-22	07-Apr-23
4136	Shield Box	TESCOM CO., LTD	TC-5916A	5916A000 137	28-Apr-22	28-Apr-23
4355	Signal and Spectrum Analyzer, 9 kHz to 7 GHz	Rohde & Schwarz	FSV 7	101630	20-Sep-21	20-Sep-22
4360	EMI Test Receiver, 20 Hz to 40 GHz.	Rohde & Schwarz	ESU40	100322	13-Jan-22	13-Jan-23
4933	Active Horn Antenna, 1 GHz to 18 GHz	COM-POWER CORPORATION	AHA-118	701046	13-Jan-22	13-Jan-23
4956	Active horn antenna, 18 to 40 GHz	COM-POWER CORPORATION	AHA-840	105004	07-Mar-22	07-Mar-23
5288	Trilog Antenna, 25 MHz - 8 GHz, 100W	Frankonia	ALX-8000E	00809	24-Mar-22	24-Apr-25
5376	EXA Signal Analyzer, 10 Hz - 32 GHz	Keysight Technologies	N9010B	MY574704 04	01-Nov-21	01-Nov-22
5410	RF cable, 40 GHz, SMA-SMA, 5.5 m	Huber-Suhner	SF102EA/11SK/11SK/5500MM	503974/EA	10-Aug-21	10-Aug-22
5644	Cable, 50 Ohm, DC to 18 GHz, 1.8 m, SMA/SMA	Mini Circuits	CBL-6FT-SMSM+	NA	01-Nov-21	01-Nov-22
5902	RF cable, 18 GHz, 6.0m, N-type	Huber-Suhner	SF126EA/11N/11N/6000	NA	16-Jan-22	16-Jan-23



HERMON LABORATORIES



9 APPENDIX B Test equipment correction factors

HL 5288: Trilog Antenna
Frankonia, model: ALX-8000E, s/n: 00809
30-1000 MHz

Frequency, MHz	Antenna factor, dB/m
30	14.96
35	15.33
40	16.37
45	17.56
50	17.95
60	16.87
70	13.22
80	10.56
90	13.61
100	15.46
120	14.03
140	12.23

Frequency, MHz	Antenna factor, dB/m
160	12.67
180	13.34
200	15.40
250	16.42
300	17.28
400	19.98
500	21.11
600	22.90
700	24.13
800	25.25
900	26.35
1000	27.18

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

above 1000 MHz

Frequency, MHz	Antenna factor, dB/m
1000	26.9
1100	28.1
1200	28.4
1300	29.6
1400	29.1
1500	30.4
1600	30.7
1700	31.5
1800	32.3
1900	32.6
2000	32.5
2100	32.9
2200	33.5
2300	33.2
2400	33.7
2500	34.6
2600	34.7
2700	34.6
2800	35.0
2900	35.5
3000	36.2
3100	36.8
3200	36.8
3300	37.0
3400	37.5
3500	38.2

Frequency, MHz	Antenna factor, dB/m
3600	38.9
3700	39.4
3800	39.4
3900	39.6
4000	39.7
4100	39.8
4200	40.5
4300	40.9
4400	41.1
4500	41.4
4600	41.3
4700	41.6
4800	41.9
4900	42.3
5000	42.7
5100	43.0
5200	42.9
5300	43.5
5400	43.6
5500	44.3
5600	44.7
5700	45.0
5800	45.0
5900	45.3
6000	45.9

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.



HL 0446: Active Loop Antenna
EMCO, model: 6502, s/n 2857

Frequency,	Measured antenna factor, dBS/m	Measurement uncertainty, dB
10	-33.4	±1.0
20	-37.8	±1.0
50	-40.5	±1.0
75	-41.0	±1.0
100	-41.2	±1.0
150	-41.2	±1.0
250	-41.1	±1.0
500	-41.2	±1.0
750	-41.3	±1.0
1000	-41.3	±1.0

Frequency,	Measured antenna factor, dBS/m	Measurement uncertainty, dB
2000	-41.4	±1.0
3000	-41.4	±1.0
4000	-41.5	±1.0
5000	-41.5	±1.0
10000	-41.7	±1.0
15000	-42.1	±1.0
20000	-42.7	±1.0
25000	-44.2	±1.0
30000	-45.8	±1.0

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ A/m.



HL 4933: Active Horn Antenna
COM-POWER CORPORATION, model: AHA-118, s/n 701046

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
1000	-16.1
1500	-15.1
2000	-10.9
2500	-11.9
3000	-11.1
3500	-10.6
4000	-8.6
4500	-8.3
5000	-5.9
5500	-5.7
6000	-3.3
6500	-4.0
7000	-2.2
7500	-1.7
8000	1.1
8500	-0.8
9000	-1.5
9500	-0.2

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
10000	1.8
10500	1.0
11000	0.3
11500	-0.5
12000	3.1
12500	1.4
13000	-0.3
13500	-0.4
14000	2.5
14500	2.2
15000	1.9
15500	0.5
16000	2.1
16500	1.2
17000	0.6
17500	3.1
18000	4.2

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

**10 APPENDIX C Measurement uncertainties****Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements**

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: ± 1.7 dB 12.4 GHz to 40 GHz: ± 2.3 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Occupied bandwidth	± 8.0 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



HERMON LABORATORIES

11 APPENDIX D Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, Radio, Safety, Environmental and Telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for relevant parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; Recognized by Innovation, Science and Economic Development Canada for wireless and terminal testing (ISED), ISED #2186A, CAB identifier is IL1001; Certified by VCCI, Japan (the registration numbers for OATS are R-10808 for RE measurements below 1 GHz, G-20112 for RE measurements above 1 GHz, R-11082 for anechoic chamber for RE measurements below 1 GHz, G-10869 for RE measurements above 1 GHz, C-10845 for conducted emissions site and T-11606 for conducted emissions at telecommunication ports).

The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing, environmental simulation and calibration (for exact scope please refer to Certificate No. 839.01, 839.03 and 839.04).

Address: P.O. Box 23, Binyamina 3055001, Israel.

Telephone: +972 4628 8001

Fax: +972 4628 8277

e-mail: mail@hermonlabs.com

website: www.hermonlabs.com

Person for contact: Mr. Michael Nikishin, EMC&Radio group manager



12 APPENDIX E

Specification references

FCC 47CFR part 15: 2020

ANSI C63.10: 2013

ANSI C63.2: 1996

RSS-247 Issue 2: 2017

RSS-Gen Issue 5

with_amendment_1_2: 2021

Radio Frequency Devices

American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence- Exempt Local Area Network (LE-LAN) Devices

General Requirements and Information for the Certification of Radiocommunication Equipment



13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband



14 APPENDIX G Manufacturer's declaration



Declaration of Identity

We, the undersigned,

Company: Vayyar Imaging Ltd.
Address: Shabazi 26, Yehud
Country: Israel
Telephone number: +972-54-42254549

declare under our sole responsibility that the following equipment:

Brand/Item	Type/Model	Short Product description
Vayyar Imaging LTD.	VMPRO19CB4BAT, VMPRO19EB4BAT	Handheld UWB device with optional WI-FI/BLE communication

Has an identical RF system as the following equipment:

Brand/Item	Type/Model	Short Product description
Vayyar Imaging LTD.	VMPRO19CB4WREP VMPRO19EB4WREP	Handheld UWB device with optional WI-FI/BLE communication

The reason for name change is: VMPRO19CB4BAT, VMPRO19EB4BAT has an integrated battery and can be supplied by either the battery or by external power source (through USB-C port). VMPRO19CB4WREP, VMPRO19EB4WREP doesn't contain battery and thus can only be powered by external power source.

21/07/2022
(date)

.....
(signature)

Naftali Chayat
(printed name)

CTO
(position)

END OF DOCUMENT