



FCC PART 95
MEASUREMENT AND TEST REPORT

For

Altis Technology (Hong Kong) Ltd.

Suite 711, Lu Plaza, 2 Wing Yip Street, Kwun Tong Hong Kong China

FCC ID: 2AHJMACXTADE

| | |
|---|---|
| Report Type: Original Report | Product Type: Walkie Talkie Two-way Radio |
| Report Number: RDG190513003-00 | |
| Report Date: 2019-08-30 | |
| Reviewed By: Jerry Zhang EMC Manager | <i>Jerry Zhang</i> |
| Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn | |

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “**”.

TABLE OF CONTENTS

GENERAL INFORMATION.....3

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)3

 OBJECTIVE3

 RELATED SUBMITTAL(S)/GRANT(S).....3

 TEST METHODOLOGY3

 MEASUREMENT UNCERTAINTY.....4

 TEST FACILITY4

SYSTEM TEST CONFIGURATION.....5

 DESCRIPTION OF TEST CONFIGURATION5

 EQUIPMENT MODIFICATIONS5

 EUT EXERCISE SOFTWARE5

 BLOCK DIAGRAM OF TEST SETUP6

SUMMARY OF TEST RESULTS7

FCC §2.1093 - RF EXPOSURE INFORMATION8

 APPLICABLE STANDARD8

 TEST RESULT8

FCC §2.1046, §95.567 - RF OUTPUT POWER.....9

 APPLICABLE STANDARD9

 TEST PROCEDURE9

 TEST EQUIPMENT LIST AND DETAILS.....9

 TEST DATA10

FCC §2.1047 & §95.575 - MODULATION CHARACTERISTIC11

 APPLICABLE STANDARD11

 TEST EQUIPMENT LIST AND DETAILS.....11

 TEST PROCEDURE11

 TEST DATA11

FCC §2.1049, §95.573, §95.579 - AUTHOURIZED BANDWIDTH AND EMISSION MASK15

 APPLICABLE STANDARD15

 TEST PROCEDURE15

 TEST EQUIPMENT LIST AND DETAILS.....15

 TEST DATA16

FCC §2.1053 & §95.579 - RADIATED SPURIOUS EMISSION19

 APPLICABLE STANDARD19

 TEST PROCEDURE19

 TEST EQUIPMENT LIST AND DETAILS.....19

 TEST DATA20

FCC§2.1055 (d), §95.565- FREQUENCY STABILITY22

 APPLICABLE STANDARD22

 TEST PROCEDURE22

 TEST EQUIPMENT LIST AND DETAILS.....22

 TEST DATA23

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

| | |
|--|--|
| EUT Name: | Walkie Talkie Two-way Radio |
| EUT Model: | ACXT145 |
| Multiple Models: | ACXT145-3, ACXT145 HD, HE145, HE145 HD, HE146, HE146 HD, CX145C+, CXT145C+, CXT145, CXT145 A, CX112, CX116A, CX131A, CXT145C, CXT195, CXT195-3, CXT195 3P, CXT145 MN, AD100, AD101, AD102, AD103, AD104, AD105, AD106, AD107, AD108, AD109, AD110, AD115 |
| Operation Frequency: | 462.5500-462.7250MHz 467.5625-467.7125MHz |
| Modulation Mode: | F3E |
| Channel Spacing: | 12.5kHz |
| Emission Designator: | 11K0F3E |
| Maximum Output Power: (ERP) | 462.5500-462.7250MHz: 19.87dBm 467.5625-467.7125MHz: 18.98 dBm |
| Rated Input Voltage: | DC3.6V from battery and DC 5V from USB port |
| Serial Number: | 190513003 |
| EUT Received Date: | 2019-08-16 |

Note: Model ACXT145 was selected for fully testing, the detailed information about the difference among ACXT145-3, ACXT145 HD, HE145, HE145 HD, HE146, HE146 HD, CX145C+, CXT145C+, CXT145, CXT145 A, CX112, CX116A, CX131A, CXT145C, CXT195, CXT195-3, CXT195 3P, CXT145 MN, AD100, AD101, AD102, AD103, AD104, AD105, AD106, AD107, AD108, AD109, AD110, AD115 and model ACXT145 can be referred to the declaration letter which was stated and guaranteed by the manufacturer.

Objective

This report is prepared on behalf of *Altis Technology (Hong Kong) Ltd.* in accordance with Part 2 and Part 95, Subpart A and B of the Federal Communication Commissions rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All tests and measurements indicated in this document were performed in accordance with Part 95 Subpart A and Subpart B of the Federal Communication Commissions rules with TIA-603-D, Land Mobile FM or PM-Communications Equipment-Measurement and Performance Standards.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

| Parameter | Measurement Uncertainty |
|-------------------------------|---|
| Occupied Channel Bandwidth | ±5 % |
| RF output power, conducted | ±0.61dB |
| Unwanted Emissions, radiated | 30MHz ~ 1GHz:5.85 dB 1G~26.5GHz: 5.23 dB |
| Unwanted Emissions, conducted | ±1.5 dB |
| Temperature | ±1 °C |
| Humidity | ±5% |
| DC and low frequency voltages | ±0.4% |
| Duty Cycle | 1% |

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier : CN0022.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

The device uses total 22 FRS channels as below:

| Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) |
|-------------|-----------------|-------------|-----------------|
| 1 | 462.5625 | 12 | 467.6625 |
| 2 | 462.5875 | 13 | 467.6875 |
| 3 | 462.6125 | 14 | 467.7125 |
| 4 | 462.6375 | 15 | 462.5500 |
| 5 | 462.6625 | 16 | 462.5750 |
| 6 | 462.6875 | 17 | 462.6000 |
| 7 | 462.7125 | 18 | 462.6250 |
| 8 | 467.5625 | 19 | 462.6500 |
| 9 | 467.5875 | 20 | 462.6750 |
| 10 | 467.6125 | 21 | 462.7000 |
| 11 | 467.6375 | 22 | 462.7250 |


Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

No software was used during test.

Block Diagram of Test Setup

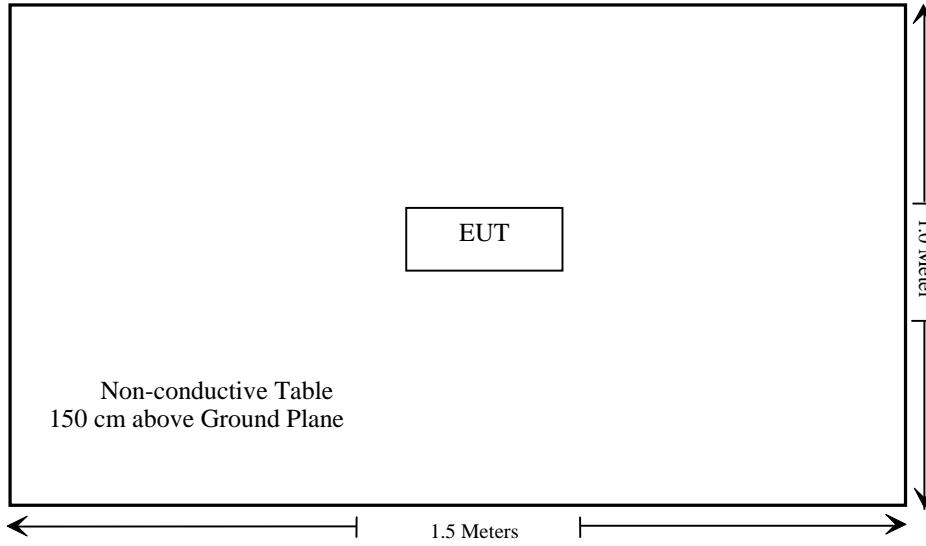

SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test | Results |
|---------------------------|--------------------------------------|----------------|
| §2.1093 | RF Exposure | Compliance |
| §2.1046, §95.567 | RF Output Power | Compliance |
| §2.1047, §95.575 | Modulation Characteristic | Compliance |
| §2.1049, §95.573, §95.579 | Authorized Bandwidth & Emission Mask | Compliance |
| §2.1053, §95.579 | Spurious Radiated Emissions | Compliance |
| §2.1055(d), §95.565 | Frequency Stability | Compliance |

FCC §2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

Test Result

Please refer to SAR Report Number: RDG190513003-20.

FCC §2.1046, §95.567 - RF OUTPUT POWER

Applicable Standard

According to FCC §95.567

Each FRS transmitter type must be designed such that the effective radiated power (ERP) on channels 8 through 14 does not exceed 0.5 Watts and the ERP on channels 1 through 7 and 15 through 22 does not exceed 2.0 Watts.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the emissions were measured by the substitution.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|----------------|---------------------------|-----------|---------------|------------------|----------------------|
| R&S | EMI Test Receiver | ESR3 | 102453 | 2019-06-26 | 2020-06-26 |
| Sunol Sciences | Antenna | JB3 | A060611-1 | 2017-11-10 | 2020-11-10 |
| EMCO | Adjustable Dipole Antenna | 3121C | 9109-753 | N/A | N/A |
| Unknown | Coaxial Cable | C-NJNJ-50 | C-0400-01 | 2018-09-05 | 2019-09-05 |
| Unknown | Coaxial Cable | C-NJNJ-50 | C-0075-01 | 2018-09-05 | 2019-09-05 |
| Unknown | Coaxial Cable | C-NJNJ-50 | C-1400-01 | 2019-05-06 | 2020-05-06 |
| Unknown | Coaxial Cable | C-NJNJ-50 | C-0200-02 | 2018-09-05 | 2019-09-05 |
| Agilent | Signal Generator | E8247C | MY43321350 | 2018-12-10 | 2019-12-10 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

| | |
|---------------------------|------------|
| Temperature: | 28°C |
| Relative Humidity: | 54 % |
| ATM Pressure: | 100.7kPa |
| Test by: | Tyler Pan |
| Test Date: | 2019-08-23 |

Test Mode: Transmitting

ERP:

FM_12.5kHz

| Frequency (MHz) | Polar (H/V) | Receiver Reading (dBµV) | Substituted Method | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|------------------------------|-------------|-------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
| | | | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) | | | |
| Frequency:462.6375MHz | | | | | | | | |
| 462.6375 | H | 82.65 | 1.32 | 0.00 | 0.67 | 0.65 | 33.00 | 32.35 |
| 462.6375 | V | 98.92 | 20.54 | 0.00 | 0.67 | 19.87 | 33.00 | 13.13 |

FM_12.5kHz

| Frequency (MHz) | Polar (H/V) | Receiver Reading (dBµV) | Substituted Method | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|------------------------------|-------------|-------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
| | | | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) | | | |
| Frequency:467.6375MHz | | | | | | | | |
| 467.6375 | H | 81.73 | 0.53 | 0.00 | 0.68 | -0.15 | 27.00 | 27.15 |
| 467.6375 | V | 97.89 | 19.66 | 0.00 | 0.68 | 18.98 | 27.00 | 8.02 |

Test Result: Compliance.

FCC §2.1047 & §95.575 - MODULATION CHARACTERISTIC

Applicable Standard

Per FCC §2.1047 and §95.575:

Each FRS transmitter type must be designed such that the peak frequency deviation does not exceed 2.5 kHz, and the highest audio frequency contributing substantially to modulation must not exceed 3.125 kHz.

Test Equipment List and Details

| Manufacturer | Description | Model No. | Serial No. | Calibration Date | Calibration Due Date |
|---------------------|----------------------------|------------------|-------------------|-------------------------|-----------------------------|
| HP | RF Communications Test Set | 8920A | 00 235 | 2019-07-11 | 2020-07-11 |
| UNI-T | Multimeter | UT39A | M130199938 | 2019-07-24 | 2020-07-24 |
| Unknown | Coaxial Cable | C-SJ00-0010 | C0010/01 | Each time | N/A |
| Weinschel | Coaxial Attenuators | 53-20-34 | LN749 | Each time | N/A |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

Test Method: TIA/EIA-603-D

Test Data

Environmental Conditions

| | |
|---------------------------|------------|
| Temperature: | 27°C |
| Relative Humidity: | 73% |
| ATM Pressure: | 100.7 kPa |
| Test by: | Blake Yang |
| Test Date: | 2019-08-21 |


Please refer to the following tables and plots.

Test Mode: Transmitting

MODULATION LIMITING

Carrier Frequency: 462.6375 MHz


| Audio Frequency (Hz) | Instantaneous | | Steady-state | | Limit [kHz] |
|----------------------|--------------------------|--------------------------|--------------------------|--------------------------|-------------|
| | Deviation (@+20dB) [kHz] | Deviation (@-20dB) [kHz] | Deviation (@+20dB) [kHz] | Deviation (@-20dB) [kHz] | |
| v | 1.894 | 0.168 | 1.803 | 0.101 | 2.5 |
| 400 | 1.936 | 0.211 | 1.853 | 0.149 | 2.5 |
| 500 | 1.997 | 0.225 | 1.910 | 0.183 | 2.5 |
| 600 | 2.025 | 0.243 | 1.923 | 0.180 | 2.5 |
| 700 | 2.008 | 0.257 | 1.943 | 0.191 | 2.5 |
| 800 | 1.975 | 0.268 | 1.893 | 0.230 | 2.5 |
| 900 | 1.969 | 0.257 | 1.862 | 0.220 | 2.5 |
| 1000 | 2.005 | 0.267 | 1.934 | 0.203 | 2.5 |
| 1200 | 2.178 | 0.302 | 2.098 | 0.259 | 2.5 |
| 1400 | 2.187 | 0.311 | 2.108 | 0.243 | 2.5 |
| 1600 | 2.152 | 0.316 | 2.056 | 0.273 | 2.5 |
| 1800 | 2.245 | 0.341 | 2.138 | 0.291 | 2.5 |
| 2000 | 2.162 | 0.352 | 2.067 | 0.296 | 2.5 |
| 2200 | 2.139 | 0.357 | 2.041 | 0.293 | 2.5 |
| 2400 | 2.174 | 0.346 | 2.109 | 0.286 | 2.5 |
| 2600 | 2.063 | 0.338 | 1.957 | 0.294 | 2.5 |
| 2800 | 2.083 | 0.343 | 1.990 | 0.283 | 2.5 |
| 3000 | 1.939 | 0.337 | 1.874 | 0.290 | 2.5 |

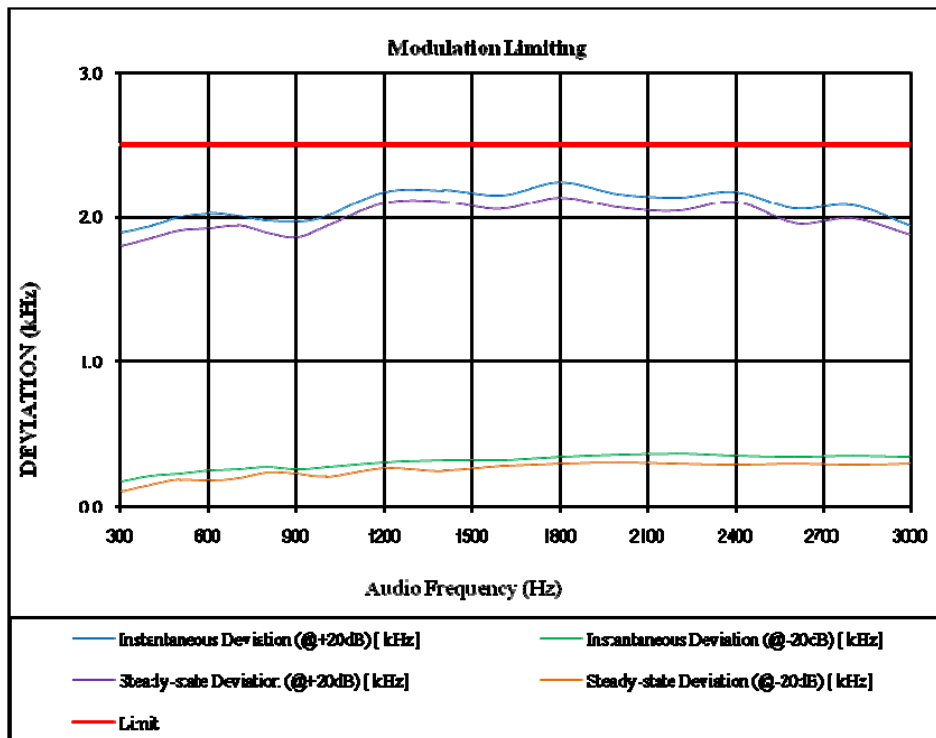

Audio Frequency Response

Carrier Frequency: 462.6375 MHz


| Audio Frequency (Hz) | Response Attenuation (dB) |
|----------------------|---------------------------|
| 300 | -10.33 |
| 400 | -7.85 |
| 500 | -5.97 |
| 600 | -4.42 |
| 700 | -3.37 |
| 800 | -2.23 |
| 900 | -1.06 |
| 1000 | 0.00 |
| 1200 | 1.09 |
| 1400 | 2.41 |
| 1600 | 3.49 |
| 1800 | 4.05 |
| 2000 | 5.16 |
| 2200 | 5.45 |
| 2400 | 6.26 |
| 2600 | 6.83 |
| 2800 | 7.15 |
| 3000 | 7.30 |
| 3125 | 4.00 |

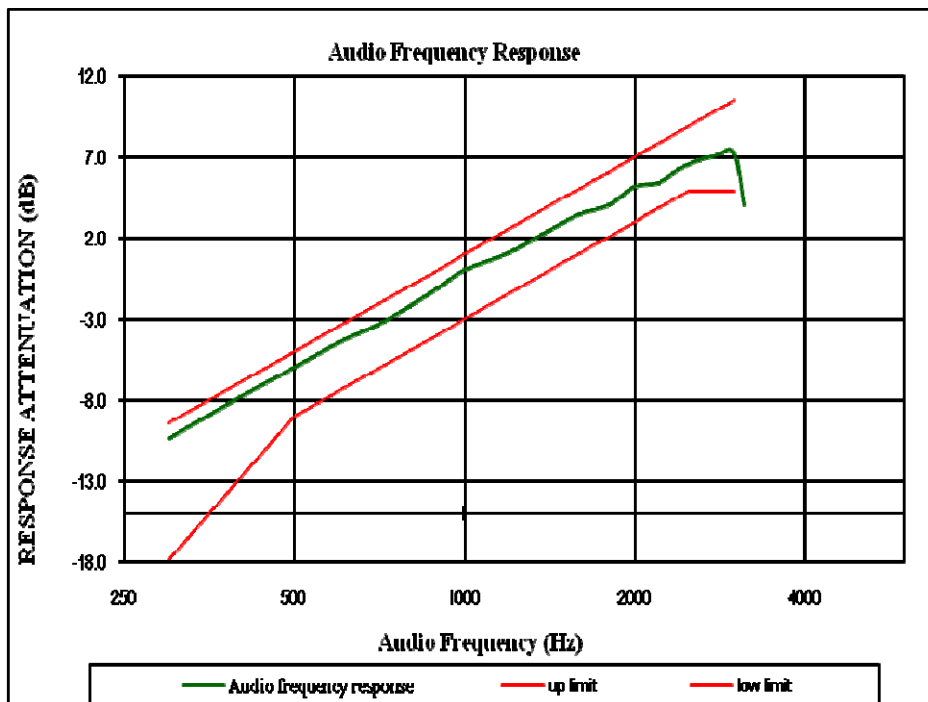

Audio Low Pass Filter Response

Carrier Frequency: 462.6375 MHz

| Audio Frequency (kHz) | Response Attenuation (dB) | Limit (dB) |
|-----------------------|---------------------------|------------|
| 3.0 | -4.6 | 0.0 |
| 3.5 | -10.8 | -6.7 |
| 4.0 | -17.2 | -12.5 |
| 5.0 | -26.8 | -22.2 |
| 7.0 | -40.7 | -36.8 |
| 10.0 | -54.8 | -52.3 |
| 15.0 | -73.1 | -69.9 |
| 20.0 | -85.4 | -82.5 |
| 30.0 | -86.1 | -82.5 |
| 50.0 | -85.7 | -82.5 |
| 70.0 | -85.5 | -82.5 |

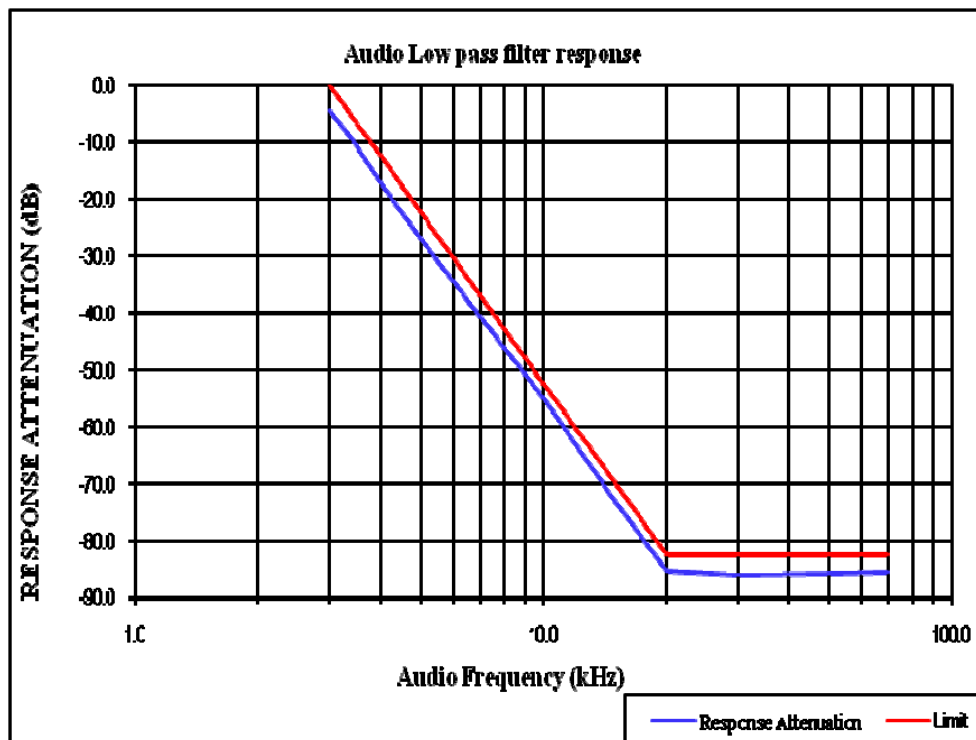

FCC §2.1049, §95.573, §95.579 - AUTHORIZED BANDWIDTH AND EMISSION MASK

Applicable Standard

According to §95.573

Each FRS transmitter type must be designed such that the occupied bandwidth does not exceed 12.5 kHz.

According to §95.579

Each FRS transmitter type must be designed to satisfy the applicable unwanted emissions limits in this paragraph.

(a) Attenuation requirements. The power of unwanted emissions must be attenuated below the carrier power output in Watts (P) by at least:

- (1) 25 dB (decibels) in the frequency band 6.25 kHz to 12.5 kHz removed from the channel center frequency.
- (2) 35 dB in the frequency band 12.5 kHz to 31.25 kHz removed from the channel center frequency.
- (3) $43 + 10 \log (P)$ dB in any frequency band removed from the channel center frequency by more than 31.25 kHz.

Test Procedure

TIA-603-D, section 2.2.11

Test Equipment List and Details

| Manufacturer | Description | Model No. | Serial No. | Calibration Date | Calibration Due Date |
|---------------------|---------------------|------------------|-------------------|-------------------------|-----------------------------|
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 831929/005 | 2019-08-03 | 2020-08-03 |
| Unknown | Coaxial Cable | C-SJ00-0010 | C0010/01 | Each time | N/A |
| Weinschel | Coaxial Attenuators | 53-20-34 | LN749 | Each time | N/A |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

| | |
|---------------------------|------------|
| Temperature: | 27°C |
| Relative Humidity: | 73% |
| ATM Pressure: | 100.7 kPa |
| Test by: | Blake Yang |
| Test Date: | 2019-08-21 |

Test Mode: Transmitting

| fc (MHz) | 99% Occupied Bandwidth (kHz) | Limit (kHz) |
|---------------------|---|------------------------|
| 462.6375 | 9.619 | 12.50 |
| 467.6375 | 9.619 | 12.50 |

Note: Emission bandwidth was based on calculation method instead of measurement.

Emission Designator

Per CFR 47 §2.201& §2.202, $BW = 2M + 2D$

For FM Mode (Channel Spacing: 12.5 kHz)

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.



$$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} = 11K0$$

F3E portion of the designator represents an FM voice transmission



Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

FM:

462.6375 MHz

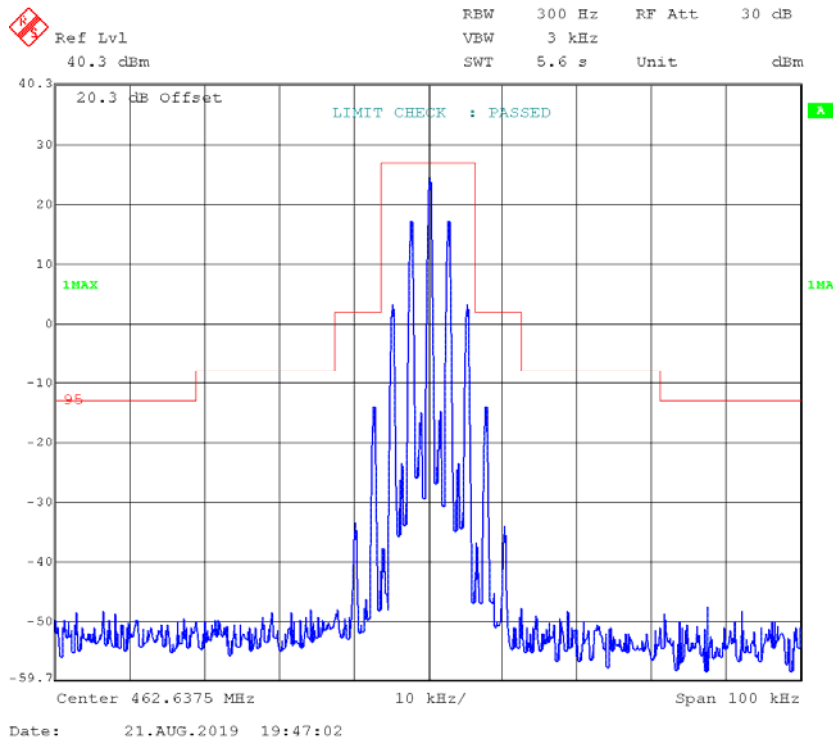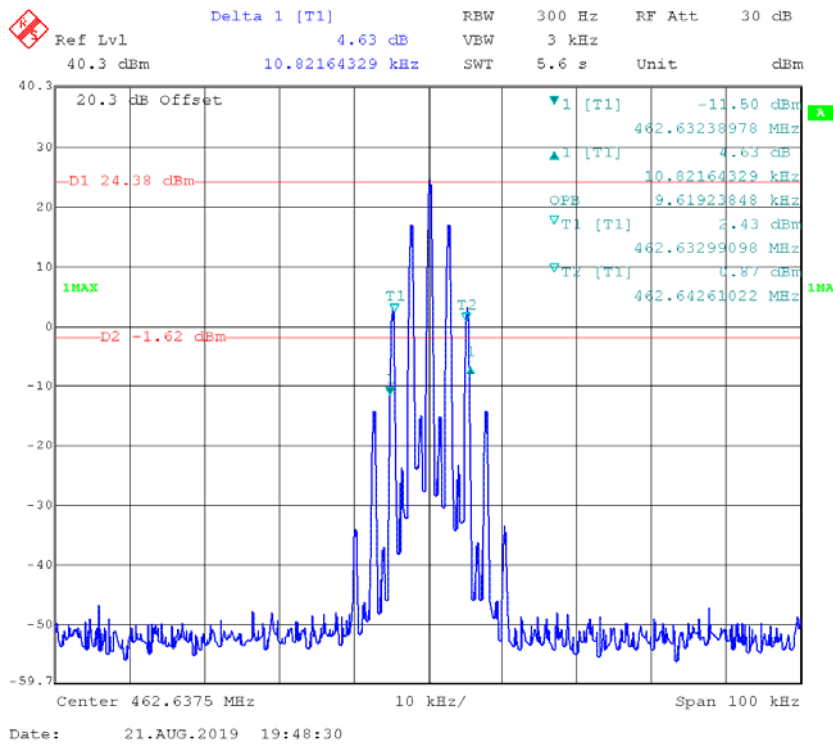

467.6375 MHz

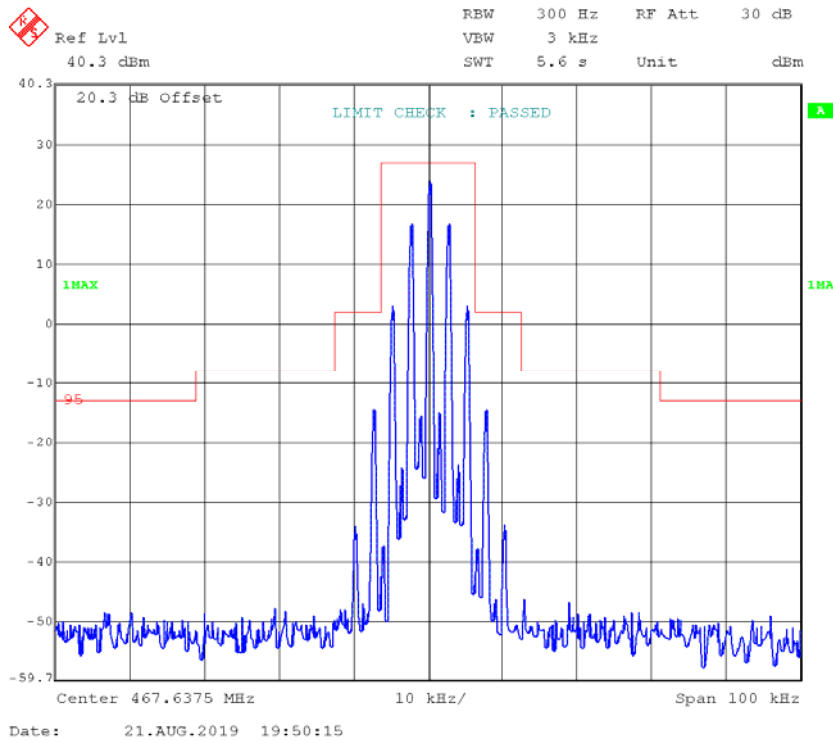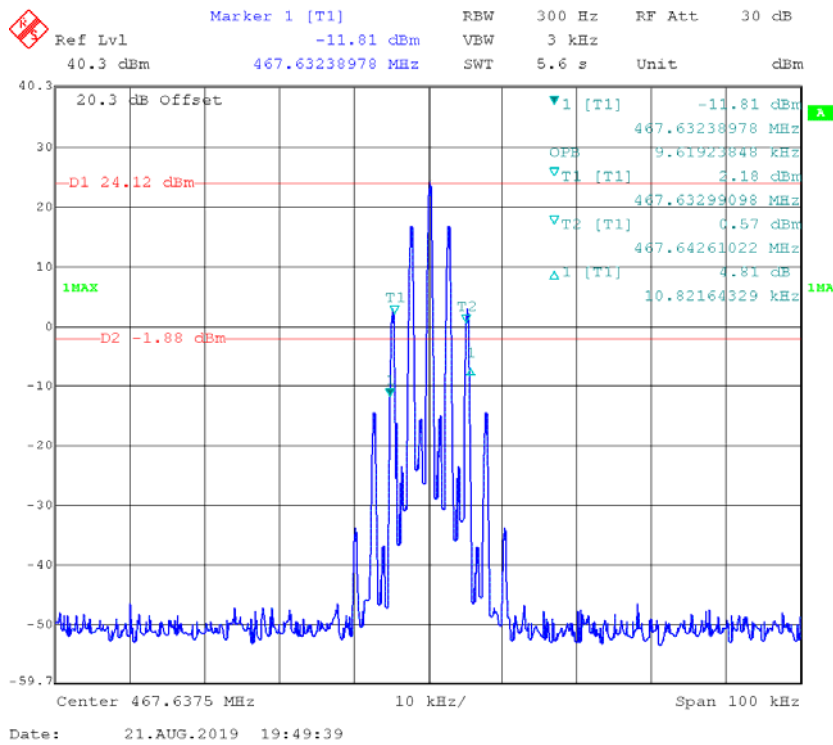

FCC §2.1053 & §95.579 - RADIATED SPURIOUS EMISSION

Applicable Standard

FCC §2.1053 and §95.579

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TXpwr in Watts/0.001)-the absolute level
Spurious attenuation limit in dB = 43+10 Log₁₀ (power out in Watts)

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|----------------|---------------------------|------------------------|---------------|------------------|----------------------|
| R&S | EMI Test Receiver | ESR3 | 102453 | 2019-06-26 | 2020-06-26 |
| Sunol Sciences | Antenna | JB3 | A060611-1 | 2017-11-10 | 2020-11-10 |
| EMCO | Adjustable Dipole Antenna | 3121C | 9109-753 | N/A | N/A |
| Unknown | Coaxial Cable | C-NJNJ-50 | C-0400-01 | 2018-09-05 | 2019-09-05 |
| Unknown | Coaxial Cable | C-NJNJ-50 | C-0075-01 | 2018-09-05 | 2019-09-05 |
| Unknown | Coaxial Cable | C-NJNJ-50 | C-1400-01 | 2018-09-05 | 2019-09-05 |
| HP | Amplifier | 8447D | 2727A05902 | 2018-09-05 | 2019-09-05 |
| Agilent | Spectrum Analyzer | E4440A | SG43360054 | 2019-01-04 | 2020-01-04 |
| TDK RF | Horn Antenna | HRN-0118 | 130 084 | 2018-10-12 | 2021-10-12 |
| ETS-Lindgren | Horn Antenna | 3115 | 000 527 35 | 2018-10-12 | 2021-10-12 |
| Unknown | Coaxial Cable | C-SJSJ-50 | C-0800-01 | 2018-09-05 | 2019-09-05 |
| Unknown | Coaxial Cable | C-NJNJ-50 | C-0200-02 | 2018-09-05 | 2019-09-05 |
| MITEQ | Amplifier | AFS42-00101800-25-S-42 | 2001271 | 2018-09-05 | 2019-09-05 |
| Agilent | Signal Generator | E8247C | MY43321350 | 2018-12-10 | 2019-12-10 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

| Test Items | Radiation Below 1GHz | Radiation Above 1GHz |
|--------------------|----------------------|----------------------|
| Temperature: | 28°C | 27.2°C |
| Relative Humidity: | 54% | 54 % |
| ATM Pressure: | 100.7 kPa | 100.7 kPa |
| Tester: | Tyler Pan | Lucy Lu |
| Test Date: | 2019-08-23 | 2019-08-23 |

Test Mode: Transmitting

FM 12.5kHz

| Frequency (MHz) | Polar (H/V) | Receiver Reading (dBμV) | Substituted Method | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|----------------------------------|-------------|-------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
| | | | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) | | | |
| FM, frequency:462.6375MHz | | | | | | | | |
| 925.28 | H | 61.68 | -34.41 | 0.00 | 0.97 | -35.38 | -13.00 | 22.38 |
| 925.28 | V | 64.83 | -33.09 | 0.00 | 0.97 | -34.06 | -13.00 | 21.06 |
| 1387.91 | H | 84.93 | -28.32 | 8.92 | 1.20 | -20.60 | -13.00 | 7.60 |
| 1387.91 | V | 87.94 | -25.94 | 8.92 | 1.20 | -18.22 | -13.00 | 5.22 |
| 1850.55 | H | 88.62 | -24.92 | 11.45 | 0.85 | -14.32 | -13.00 | 1.32 |
| 1850.55 | V | 80.89 | -33.10 | 11.45 | 0.85 | -22.50 | -13.00 | 9.50 |
| 2313.19 | H | 80.32 | -31.93 | 11.35 | 1.24 | -21.82 | -13.00 | 8.82 |
| 2313.19 | V | 85.40 | -26.79 | 11.35 | 1.24 | -16.68 | -13.00 | 3.68 |
| 2775.83 | H | 64.96 | -47.26 | 13.10 | 1.33 | -35.49 | -13.00 | 22.49 |
| 2775.83 | V | 63.91 | -48.49 | 13.10 | 1.33 | -36.72 | -13.00 | 23.72 |
| 3238.46 | H | 74.08 | -36.07 | 13.60 | 1.58 | -24.05 | -13.00 | 11.05 |
| 3238.46 | V | 64.96 | -45.23 | 13.60 | 1.58 | -33.21 | -13.00 | 20.21 |
| 3701.10 | H | 72.40 | -36.69 | 14.00 | 1.83 | -24.52 | -13.00 | 11.52 |
| 3701.10 | V | 67.06 | -42.01 | 14.00 | 1.83 | -29.84 | -13.00 | 16.84 |

FM 12.5kHz

| Frequency (MHz) | Polar (H/V) | Receiver Reading (dBµV) | Substituted Method | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|----------------------------------|-------------|-------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
| | | | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) | | | |
| FM, frequency:467.6375MHz | | | | | | | | |
| 935.28 | H | 63.37 | -32.30 | 0.00 | 0.94 | -33.24 | -13.00 | 20.24 |
| 935.28 | V | 66.58 | -30.85 | 0.00 | 0.94 | -31.79 | -13.00 | 18.79 |
| 1402.91 | H | 79.56 | -33.70 | 9.01 | 1.20 | -25.89 | -13.00 | 12.89 |
| 1402.91 | V | 82.67 | -31.17 | 9.01 | 1.20 | -23.36 | -13.00 | 10.36 |
| 1870.55 | H | 80.83 | -32.37 | 11.59 | 0.92 | -21.70 | -13.00 | 8.7 |
| 1870.55 | V | 78.23 | -35.36 | 11.59 | 0.92 | -24.69 | -13.00 | 11.69 |
| 2338.19 | H | 75.83 | -36.52 | 11.62 | 1.25 | -26.15 | -13.00 | 13.15 |
| 2338.19 | V | 77.92 | -34.45 | 11.62 | 1.25 | -24.08 | -13.00 | 11.08 |
| 2805.83 | H | 63.59 | -48.59 | 13.15 | 1.36 | -36.80 | -13.00 | 23.8 |
| 2805.83 | V | 64.73 | -47.65 | 13.15 | 1.36 | -35.86 | -13.00 | 22.86 |
| 3273.46 | H | 68.59 | -41.93 | 13.60 | 1.58 | -29.91 | -13.00 | 16.91 |
| 3273.46 | V | 65.33 | -45.21 | 13.60 | 1.58 | -33.19 | -13.00 | 20.19 |
| 3741.10 | H | 70.56 | -38.33 | 13.84 | 1.69 | -26.18 | -13.00 | 13.18 |
| 3741.10 | V | 66.82 | -41.98 | 13.84 | 1.69 | -29.83 | -13.00 | 16.83 |

Note 1: The unit of antenna gain is dBd for frequency below 1GHz and is dBi for frequency above 1GHz.

Note 2:

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

FCC§2.1055 (d), §95.565- FREQUENCY STABILITY

Applicable Standard

According to FCC §2.1055(a) (1),

The frequency stability shall be measured with variation of ambient temperature from –30 °C to +50 °C, and according to FCC 2.1055(d) (2), the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point which is specified by the manufacturer.

According to FCC §95.565

Each FRS transmitter type must be designed such that the carrier frequencies remain within ± 2.5 parts-per-million of the channel center frequencies specified in § 95.563 during normal operating conditions.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a Frequency Counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Frequency Counter.

Frequency Stability vs. Voltage:

1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

The output frequency was recorded for each voltage.

Test Equipment List and Details

| Manufacturer | Description | Model No. | Serial No. | Calibration Date | Calibration Due Date |
|---------------------|--|------------------|-------------------|-------------------------|-----------------------------|
| HP | RF Communications Test Set | 8920A | 00 235 | 2019-07-11 | 2020-07-11 |
| Unknown | Coaxial Cable | C-SJ00-0010 | C0010/01 | Each time | / |
| E-Microwave | Blocking Control | EMDCB-00036 | 0E01201047 | Each time | / |
| Weinschel | Coaxial Attenuators | 53-20-34 | LN749 | Each time | / |
| ESPEC | Constant temperature and humidity Tester | ESX-4CA | 018 463 | 2019-03-26 | 2020-03-26 |
| UNI-T | Multimeter | UT39A | M130199938 | 2019-07-24 | 2020-07-24 |
| Pro instrument | DC Power Supply | pps3300 | 3300012 | N/A | N/A |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

| | |
|---------------------------|------------|
| Temperature: | 27°C |
| Relative Humidity: | 73% |
| ATM Pressure: | 100.7 kPa |
| Test by: | Blake Yang |
| Test Date: | 2019-08-21 |

Test Mode: Transmitting

| Reference Frequency: 462.6375 MHz | | | | |
|-----------------------------------|---------|------------|-----------------|-------|
| Temperature | Voltage | Reading | Frequency Error | Limit |
| °C | Vdc | MHz | ppm | ppm |
| -30 | 3.6 | 462.637930 | 0.93 | 2.5 |
| -20 | | 462.637917 | 0.90 | |
| -10 | | 462.637889 | 0.84 | |
| 0 | | 462.637893 | 0.85 | |
| 10 | | 462.637758 | 0.56 | |
| 20 | | 462.637851 | 0.76 | |
| 30 | | 462.637830 | 0.71 | |
| 40 | | 462.637821 | 0.69 | |
| 50 | | 462.637789 | 0.62 | |
| 20 | | 3.0 | 462.637785 | |
| 20 | 4.8 | 462.637797 | 0.64 | |

| Reference Frequency: 467.6375 MHz | | | | |
|-----------------------------------|---------|------------|-----------------|-------|
| Temperature | Voltage | Reading | Frequency Error | Limit |
| °C | Vdc | MHz | ppm | ppm |
| -30 | 3.6 | 467.637894 | 0.84 | 2.5 |
| -20 | | 467.637789 | 0.62 | |
| -10 | | 467.637822 | 0.69 | |
| 0 | | 467.637779 | 0.60 | |
| 10 | | 467.637827 | 0.70 | |
| 20 | | 467.637851 | 0.75 | |
| 30 | | 467.637878 | 0.81 | |
| 40 | | 467.637867 | 0.78 | |
| 50 | | 467.637830 | 0.71 | |
| 20 | | 3.0 | 467.637915 | |
| 20 | 4.8 | 467.637753 | 0.54 | |

Note: The extreme voltage was declared by applicant.

******* END OF REPORT *******