



# TEST REPORT

**APPLICANT** : Nubia Technology Co.,Ltd.  
**PRODUCT NAME** : 5G Mobile Phone  
**MODEL NAME** : NX669J  
**BRAND NAME** : REDMAGIC  
**FCC ID** : 2AHJO-NX669J  
**STANDARD(S)** : 47 CFR Part 15 Subpart C  
**RECEIPT DATE** : 2020-12-16  
**TEST DATE** : 2021-01-10 to 2021-03-09  
**ISSUE DATE** : 2021-03-13

Edited by: Peng Mi  
Peng Mi (Rapporteur)

Approved by: Peng Huarui  
Peng Huarui (Supervisor)

**NOTE:** This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





# DIRECTORY

- 1. Technical Information ..... 3
  - 1.1. Applicant and Manufacturer Information ..... 3
  - 1.2. Equipment Under Test (EUT) Description ..... 3
  - 1.3. Modulation Type and Data Rate of EUT ..... 5
  - 1.4. The Channel Number and Frequency ..... 5
  - 1.5. Test Standards and Results ..... 6
  - 1.6. Environmental Conditions ..... 7
- 2. 47 CFR Part 15C Requirements ..... 8
  - 2.1. Antenna Requirement ..... 8
  - 2.2. Duty Cycle of Test Signal ..... 9
  - 2.3. Maximum Peak and Average Conducted Output Power ..... 13
  - 2.4. Bandwidth ..... 18
  - 2.5. Conducted Spurious Emissions and Band Edge ..... 33
  - 2.6. Power Spectral Density (PSD) ..... 55
  - 2.7. Conducted Emission ..... 84
  - 2.8. Restricted Frequency Bands ..... 88
  - 2.9. Radiated Emission ..... 110
- Annex A Test Uncertainty ..... 135
- Annex B Testing Laboratory Information ..... 136

Change History		
Version	Date	Reason for change
1.0	2021-03-13	First edition



# 1. Technical Information

Note: Provide by applicant.

## 1.1. Applicant and Manufacturer Information

<b>Applicant:</b>	Nubia Technology Co.,Ltd.
<b>Applicant Address:</b>	Room 1801, Building 2, Chongwen Park, Nanshan Zhiyuan, No.3370, Liuxian Rd, Nanshan District, Shenzhen City, Guangdong Province, P. R. China
<b>Manufacturer:</b>	Nubia Technology Co.,Ltd.
<b>Manufacturer Address:</b>	Room 1801, Building 2, Chongwen Park, Nanshan Zhiyuan, No.3370, Liuxian Rd, Nanshan District, Shenzhen City, Guangdong Province, P. R. China

## 1.2. Equipment Under Test (EUT) Description

<b>Product Name:</b>	5G Mobile Phone	
<b>Serial No:</b>	(N/A, marked #1 by test site)	
<b>Hardware Version:</b>	NX669J_V1AMB	
<b>Software Version:</b>	NX669J_EUCommon_V3.05	
<b>Modulation Technology:</b>	DSSS, OFDM	
<b>Modulation Type:</b>	Refer to section1.3	
<b>Operating Frequency Range:</b>	802.11b/g/n (HT20): 2412MHz–2462MHz 802.11ax(HEW20): 2412MHz–2462MHz	
<b>Antenna Type:</b>	PIFA Antenna	
<b>Antenna Gain:</b>	ANT 0: -1dBi; ANT 1:-1dBi	
<b>Directional Gain:</b>	2.01dBi <sub>Note 3</sub>	
<b>Accessory Information:</b>	Battery	
	<b>Brand Name:</b>	nubia
	<b>Model No.:</b>	Li3945T44P8h906455
	<b>Serial No.:</b>	(N/A, marked #1 by test site)
	<b>Capacity:</b>	4960mAh
	<b>Rated Voltage:</b>	3.87V
	<b>Charge Limit:</b>	4.45V
	<b>Manufacturer:</b>	Dongguan Amperex Technology Limited



<b>Accessory Information:</b>	AC Adapter	
	Brand Name:	nubia
	Model No.:	NB-A930A-A, NB-A930A-USBA-1
	Serial No.:	(N/A, marked #1 by test site)
	Rated Output:	5V=3A, 9V=3A, 12V=2.5A, 15V=2A,
	Rated Input:	100-240V~50/60Hz, Max 0.8A
	Manufacturer:	ShenZhen Kingfulin Technology Co., Ltd

**Note 1:** We use the dedicated software to control the EUT continuous transmission.

**Note 2:** The EUT has two antennas, only 802.11n/ax modulation mode supports a MIMO function.

**Note 3:** According to KDB 662911 D01, the directional gain =  $G_{ANT} + 10\log(N_{ANT})$  dBi, where  $G_{ANT}$  is the maximum antenna gain in dBi,  $N_{ANT}$  is the number of outputs.

**Note 4:** For conducted test item Conducted Output Power and Power Spectral Density of each modulation mode, we recorded the test result of two antennas separately, for other conducted test items both of the two antennas were tested separately, we only recorded the worst test result (ANT 0) in this report.

**Note 5:** All radiation test items for 802.11n and 802.11 ax modulation mode operate at MIMO mode during the test. Other modulation mode operate at SISO mode, both of the two antennas were tested separately, we only recorded the worst test result(ANT0) in this report.

**Note 6:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



### 1.3. Modulation Type and Data Rate of EUT

Mode	Bandwidth (MHz)	Modulation Technology	Modulation Type	Data Rate	RU Size
802.11b	20	DSSS	<b>DBPSK</b>	1/2/5.5/11Mbps	NA
			DQPSK		
			CCK		
802.11g	20	OFDM	<b>BPSK</b>	6/9/12/18/24/36/48/54Mbps	NA
			QPSK		
			16QAM		
			64QAM		
802.11n	20 (HT20)	OFDM	<b>BPSK</b>	<b>MCS0~MCS7</b>	NA
			QPSK		
			16QAM		
			64QAM		
802.11ax	20 (HEW20)	OFDMA	<b>BPSK</b>	<b>MCS0~MCS11</b>	26/52/106/242
			QPSK		
			16QAM		
			64QAM		
			256QAM		
			1024QAM		

**Note1:** The worst-case mode (bold face) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.

### 1.4. The Channel Number and Frequency

Test Mode	Channel	Frequency (MHz)	Channel	Frequency (MHz)
802.11 b/g/n(HT20)/ ax(HEW20)	<b>1</b>	<b>2412</b>	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	<b>11</b>	<b>2462</b>
	5	2432		
	<b>6</b>	<b>2437</b>		
	7	2442		

**Note 1:** The black bold channels were selected for test.



## 1.5. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle of Test Signal	Feb 02, 2021	Ouyang Feng	PASS	No deviation
3	15.247(b)	Maximum Peak and Average Conducted Output Power	Feb 02, 2021	Ouyang Feng	PASS	No deviation
4	15.247(a)	Bandwidth	Feb 02, 2021	Ouyang Feng	PASS	No deviation
5	15.247(d)	Conducted Spurious Emission and Band Edge	Feb 02, 2021	Ouyang Feng	PASS	No deviation
6	15.247(e)	Power Spectral Density (PSD)	Feb 02, 2021	Ouyang Feng	PASS	No deviation
7	15.207	Conducted Emission	Jan 10, 2021	Huang Zhiye	PASS	No deviation
8	15.247(d)	Restricted Frequency Bands	Feb 02&14&24&25, 2021 Mar 09,,2021	Gao Jianrou	PASS	No deviation
9	15.209, 15.247(d)	Radiated Emission	Feb 02&13&24, 2021	Gao Jianrou	PASS	No deviation



			Mar 09,2021			
--	--	--	----------------	--	--	--

**Note 1:** The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013, KDB558074 D01 v05r02.

**Note 2:** The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The ref offset 12dB contains two parts that cable loss 2dB and Attenuator 10dB.

**Note 3:** Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

**Note 4:** When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% risk level.

## 1.6. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



## 2. 47 CFR Part 15C Requirements

### 2.1. Antenna Requirement

#### 2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 2.1.2. Test Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.



## 2.2. Duty Cycle of Test Signal


### 2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this subclause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than  $\pm 2\%$ ; otherwise, the duty cycle is considered to be nonconstant.

### 2.2.2. Test Description

#### Test Setup:

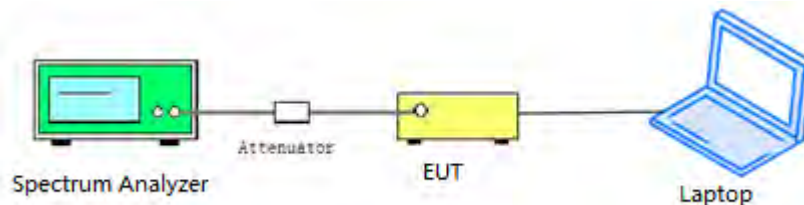

ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.




2.2.3. Test Result


A. Test Verdict:

Test Mode	Duty Cycle (%) (D)	Duty Factor (10*Ig[1/D])
802.11b	100.00	0.00
802.11g	100.00	0.00
802.11n (HT20)	100.00	0.00
802.11ax (HEW20)	100.00	0.00


B. Test Plot:

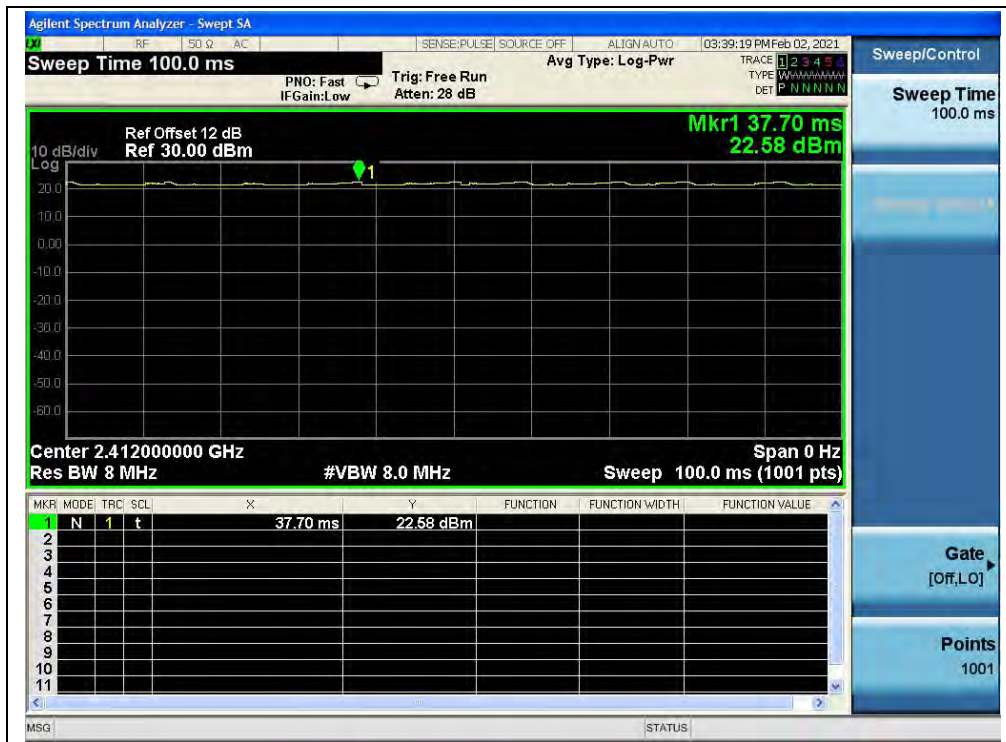

(Channel 1, 802.11b)

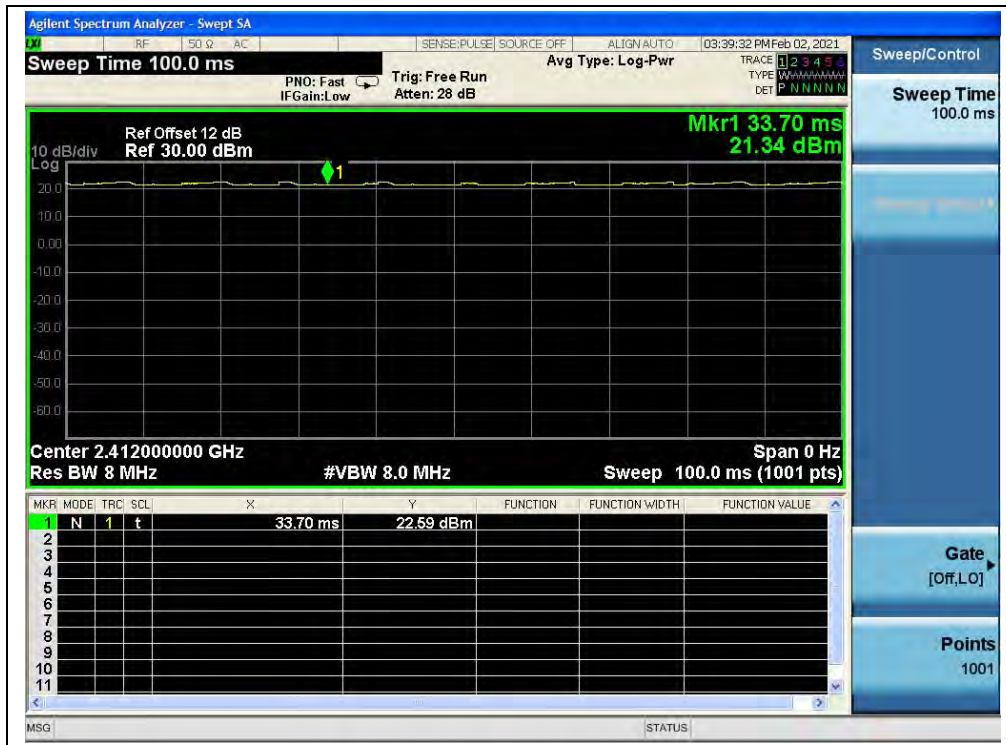

(Channel 1, 802.11g)

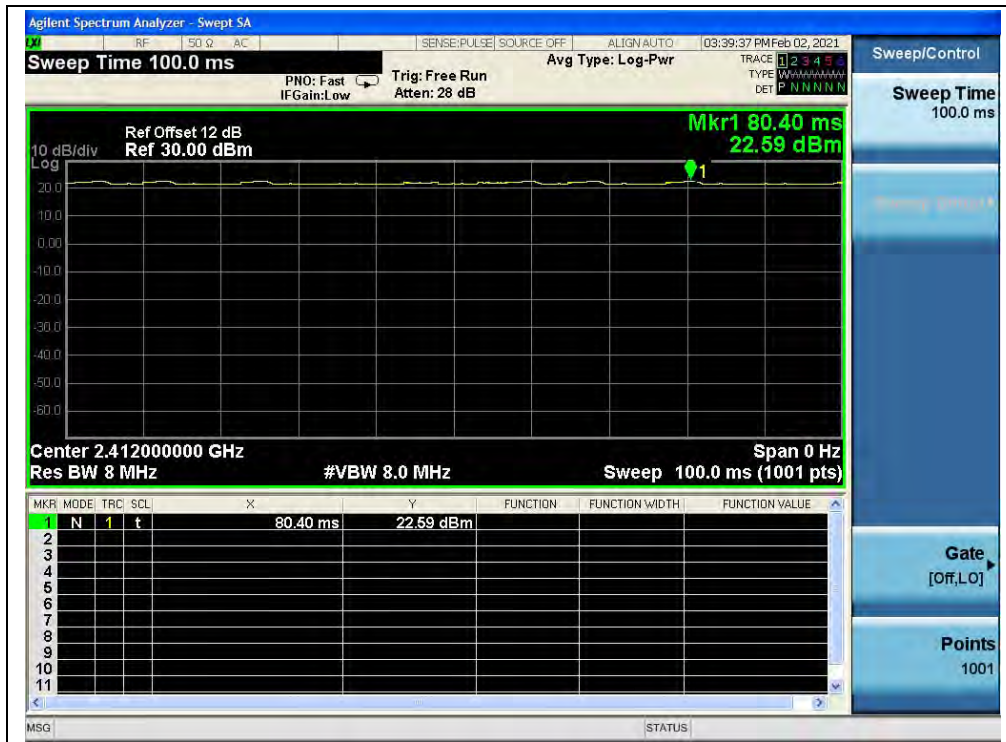

(Channel 1, 802.11n (HT20))



(Channel 1, 802.11ax (HEW20))

## 2.3. Maximum Peak and Average Conducted Output Power


### 2.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

### 2.3.2. Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

#### Test Setup:

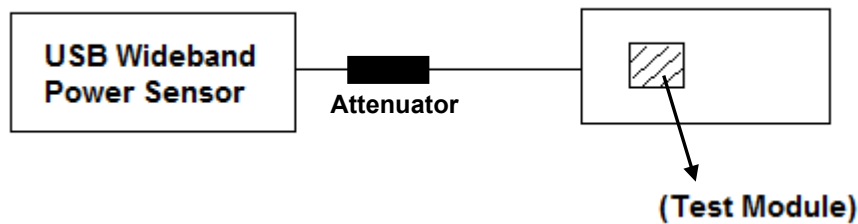

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.



2.3.3.Test Result

Maximum Peak Conducted Output Power

802.11b Mode

Channel	Frequency (MHz)	Measured Peak Power				Limit (dBm)		Verdict
		ANT 0		ANT 1		dBm	W	
		dBm	W	dBm	W			
1	2412	14.42	0.028	17.32	0.054	30	1	PASS
6	2437	14.56	0.029	17.41	0.055			PASS
11	2462	14.34	0.027	17.26	0.053			PASS

802.11g Mode

Channel	Frequency (MHz)	Measured Peak Power				Limit (dBm)		Verdict
		ANT 0		ANT 1		dBm	W	
		dBm	W	dBm	W			
1	2412	16.64	0.046	18.85	0.077	30	1	PASS
6	2437	16.85	0.048	18.64	0.073			PASS
11	2462	16.71	0.047	18.71	0.074			PASS

802.11n(HT20) Mode

Channel	Frequency (MHz)	Measured Peak Power (dBm)		Total Power (dBm)	Total Power (W)	Limit		Verdict
		ANT 0	ANT 1			dBm	W	
1	2412	16.34	18.32	20.45	0.111	30	1	PASS
6	2437	16.23	18.40	20.45	0.111			PASS
11	2462	16.30	18.26	20.41	0.110			PASS

**Note:** Directional gain =  $-1\text{dBi} + 10\log(2) = 2.01\text{dBi} < 6\text{dBi}$ , so the power limit is 1W(30dBm).

802.11ax(HEW20) Test mode

Channel	Frequency (MHz)	Measured Peak Power (dBm)		Total Power (dBm)	Total Power (W)	Limit		Verdict
		ANT 0	ANT 1			dBm	W	
1	2412	16.74	20.16	21.79	0.151	30	1	PASS
6	2437	16.80	20.21	21.85	0.153			PASS
11	2462	16.66	20.30	21.85	0.153			PASS

**Note:** Directional gain =  $-1\text{dBi} + 10\log(2) = 2.01\text{dBi} < 6\text{dBi}$ , so the power limit is 1W(30dBm).





**802.11ax(HEW20)(RU26) Mode**

Channel	Frequency (MHz)	Measured Peak Power (dBm)		Total Power (dBm)	Total Power (W)	Limit		Verdict
		ANT 0	ANT 1			dBm	W	
1	2412	16.34	19.82	21.43	0.139	30	1	PASS
6	2437	16.29	19.72	21.34	0.136			PASS
11	2462	16.41	19.43	21.17	0.131			PASS

**Note:** Directional gain =  $-1\text{dBi} + 10\log(2) = 2.01\text{dBi} < 6\text{dBi}$ , so the power limit is 1W(30dBm).

**802.11ax(HEW20)(RU52) Mode**

Channel	Frequency (MHz)	Measured Peak Power (dBm)		Total Power (dBm)	Total Power (W)	Limit		Verdict
		ANT 0	ANT 1			dBm	W	
1	2412	13.20	14.05	16.63	0.046	30	1	PASS
6	2437	13.31	14.12	16.72	0.047			PASS
11	2462	13.26	14.30	16.81	0.048			PASS

**Note:** Directional gain =  $-1\text{dBi} + 10\log(2) = 2.01\text{dBi} < 6\text{dBi}$ , so the power limit is 1W(30dBm).

**802.11ax(HEW20)(RU106) Mode**

Channel	Frequency (MHz)	Measured Peak Power (dBm)		Total Power (dBm)	Total Power (W)	Limit		Verdict
		ANT 0	ANT 1			dBm	W	
1	2412	11.26	12.34	14.91	0.031	30	1	PASS
6	2437	11.31	12.41	14.91	0.031			PASS
11	2462	11.24	12.37	14.91	0.031			PASS

**Note:** Directional gain =  $-1\text{dBi} + 10\log(2) = 2.01\text{dBi} < 6\text{dBi}$ , so the power limit is 1W(30dBm).



**Maximum Average Conducted Output Power**

**802.11b Mode**

Frequency (MHz)	Average Power						Limit		Verdict	
	Measured		Duty Factor	Duty factor Calculated						
	ANT0	ANT1		ANT0		ANT1				
	dBm	dBm		dBm	W	dBm	W	dBm		W
2412	12.31	16.69	0.00	12.31		16.69		30	1	PASS
2437	12.35	16.91		12.35		16.91				PASS
2462	11.61	16.82		11.61		16.82				PASS

**802.11g Mode**

Frequency (MHz)	Average Power						Limit		Verdict	
	Measured		Duty Factor	Duty factor Calculated						
	ANT0	ANT1		ANT0		ANT1				
	dBm	dBm		dBm	W	dBm	W	dBm		W
2412	11.20	16.31	0.00	11.20		16.31		30	1	PASS
2437	11.24	16.38		11.24		16.38				PASS
2462	11.21	16.34		11.21		16.34				PASS

**802.11n (HT20) Mode**

Frequency (MHz)	Average Power					Limit		Verdict
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1						
	dBm	dBm		dBm	W	dBm	W	
2412	9.82	15.10	0.00	16.23	0.042	30	1	PASS
2437	9.98	15.05		16.23	0.042			PASS
2462	9.76	15.33		16.43	0.044			PASS

**Note:** Directional gain =  $-1\text{dBi} + 10\log(2) = 2.01\text{dBi} < 6\text{dBi}$ , so the power limit is 1W(30dBm).

**802.11ax(HEW20) Mode**

Frequency (MHz)	Average Power					Limit		Verdict
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1						
	dBm	dBm		dBm	W	dBm	W	
2412	10.17	15.25	0.00	16.43	0.044	30	1	PASS
2437	10.28	15.34		16.53	0.045			PASS
2462	10.12	15.44		16.53	0.045			PASS

**Note:** Directional gain =  $-1\text{dBi} + 10\log(2) = 2.01\text{dBi} < 6\text{dBi}$ , so the power limit is 1W(30dBm).





**802.11ax(HEW20) (RU26) Mode**

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1		dBm	W	dBm		W
2412	9.51	13.21	0.00	14.77	0.030	30	1	PASS
2437	9.31	13.15		14.62	0.029			PASS
2462	9.42	13.26		14.77	0.030			PASS

**Note:** Directional gain =  $-1\text{dBi} + 10\log(2) = 2.01\text{dBi} < 6\text{dBi}$ , so the power limit is 1W(30dBm).

**802.11ax(HEW20) (RU52) Mode**

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1		dBm	W	dBm		W
2412	9.12	11.21	0.00	13.22	0.021	30	1	PASS
2437	9.21	11.22		13.42	0.022			PASS
2462	9.13	11.30		13.42	0.022			PASS

**Note:** Directional gain =  $-1\text{dBi} + 10\log(2) = 2.01\text{dBi} < 6\text{dBi}$ , so the power limit is 1W(30dBm).

**802.11ax(HEW20) (RU106) Mode**

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1		dBm	W	dBm		W
2412	8.79	9.74	0.00	12.30	0.017	30	1	PASS
2437	8.83	9.62		12.30	0.017			PASS
2462	8.64	9.55		12.04	0.016			PASS

**Note:** Directional gain =  $-1\text{dBi} + 10\log(2) = 2.01\text{dBi} < 6\text{dBi}$ , so the power limit is 1W(30dBm).


## 2.4. Bandwidth

### 2.4.1. Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 2.4.2. Test Description

#### Test Setup:

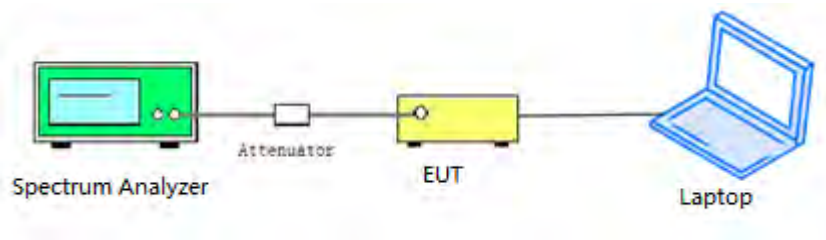

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

### 2.4.3. Test Procedure

KDB 558074 Section 8.2 was used in order to prove compliance.



2.4.4. Test Result

802.11b Mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	8.02	≥500	PASS
6	2437	8.11	≥500	PASS
11	2462	7.98	≥500	PASS

B. Test Plot:



(Channel 1, 802.11b)



(Channel 6, 802.11b)



(Channel 11, 802.11b)



802.11g Mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	15.07	≥500	PASS
6	2437	15.06	≥500	PASS
11	2462	15.11	≥500	PASS

B. Test Plot:



(Channel 1, 802.11g)





(Channel 6, 802.11g)



(Channel 11, 802.11g)




802.11n (HT20) Mode


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	15.86	≥500	PASS
6	2437	15.00	≥500	PASS
11	2462	15.31	≥500	PASS

B. Test Plot:

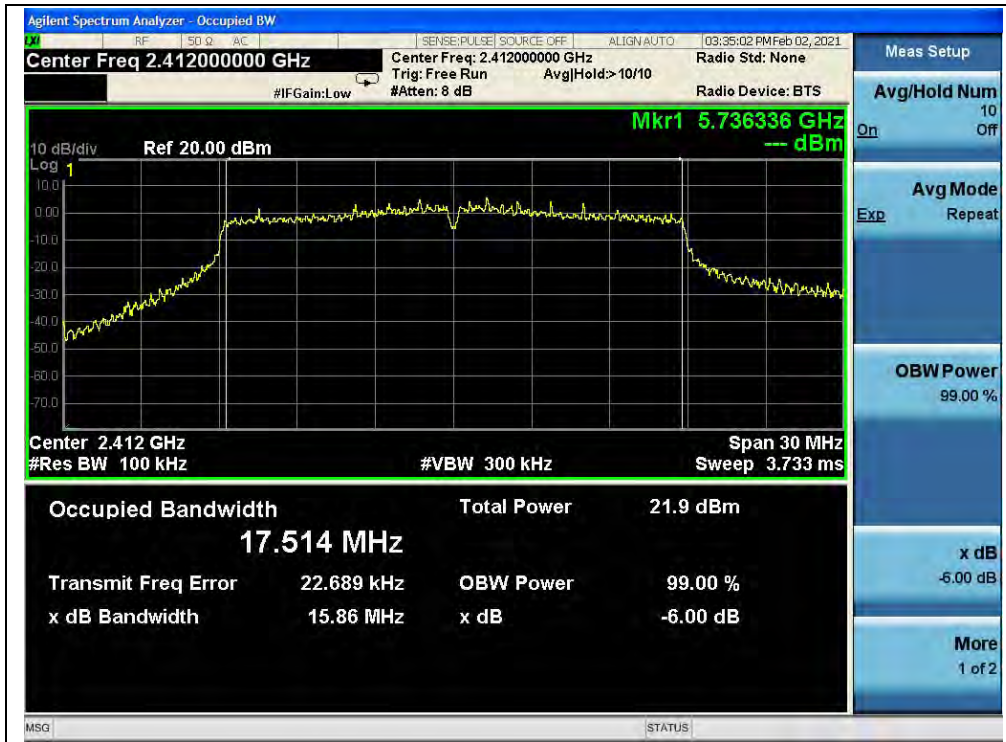

(Channel 1, 802.11n (HT20))

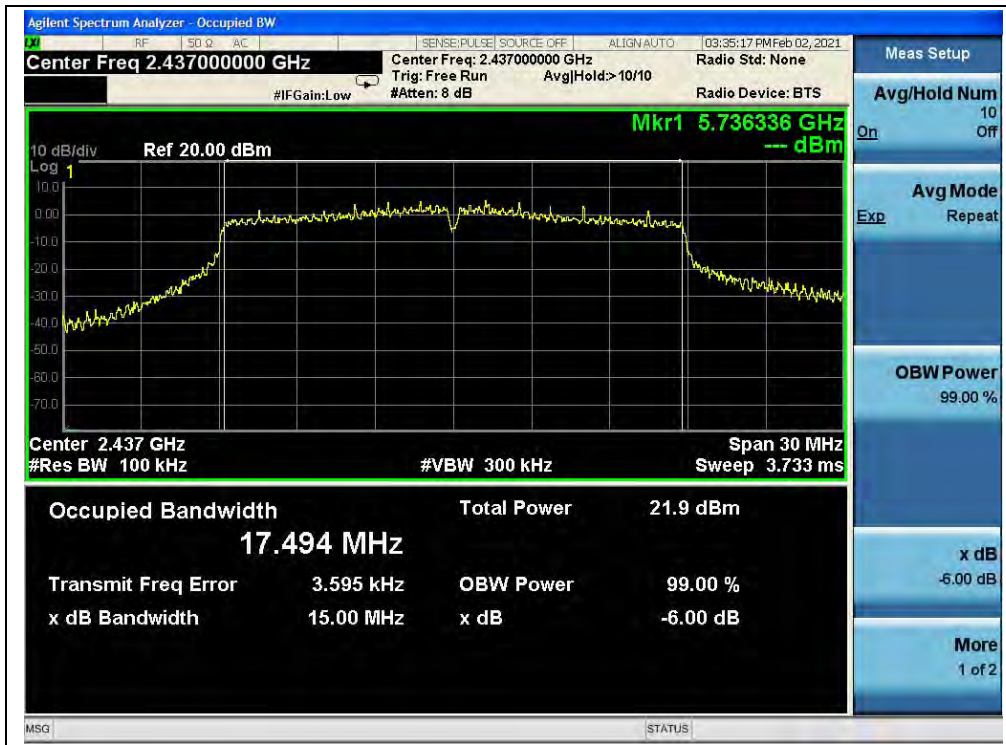

(Channel 6, 802.11n (HT20))



(Channel 11, 802.11n (HT20))






**802.11ax (HEW20) Mode**


**A.Test Verdict:**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	15.02	≥500	PASS
6	2437	14.03	≥500	PASS
11	2462	16.78	≥500	PASS

**B.Test Plot:**

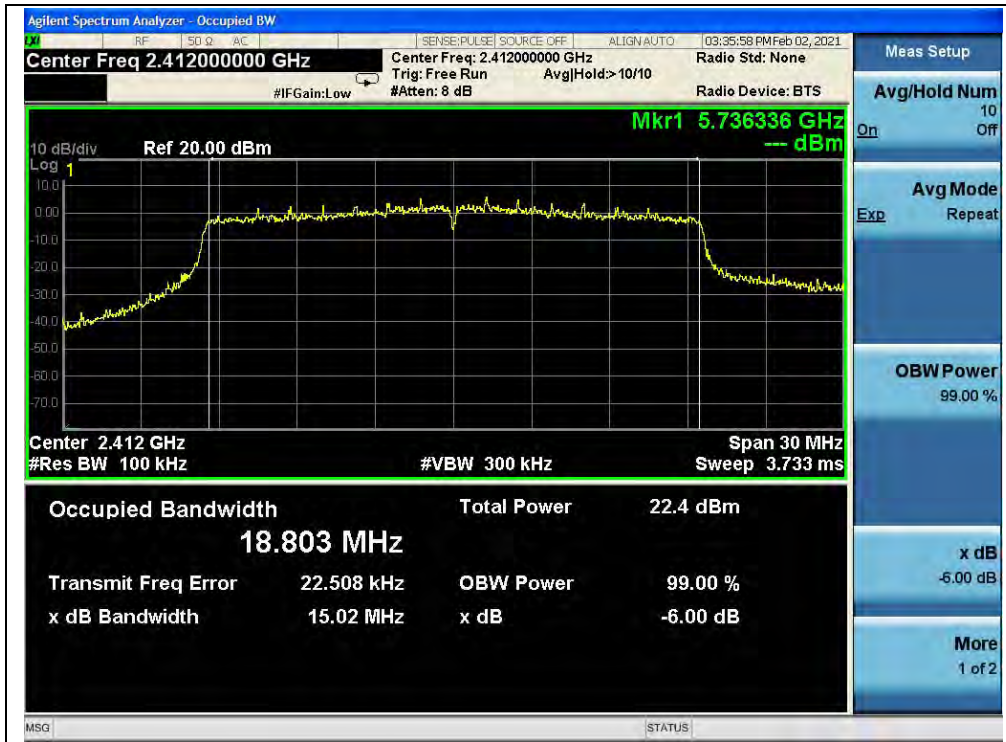

(Channel 3, 802.11ax (HEW20))

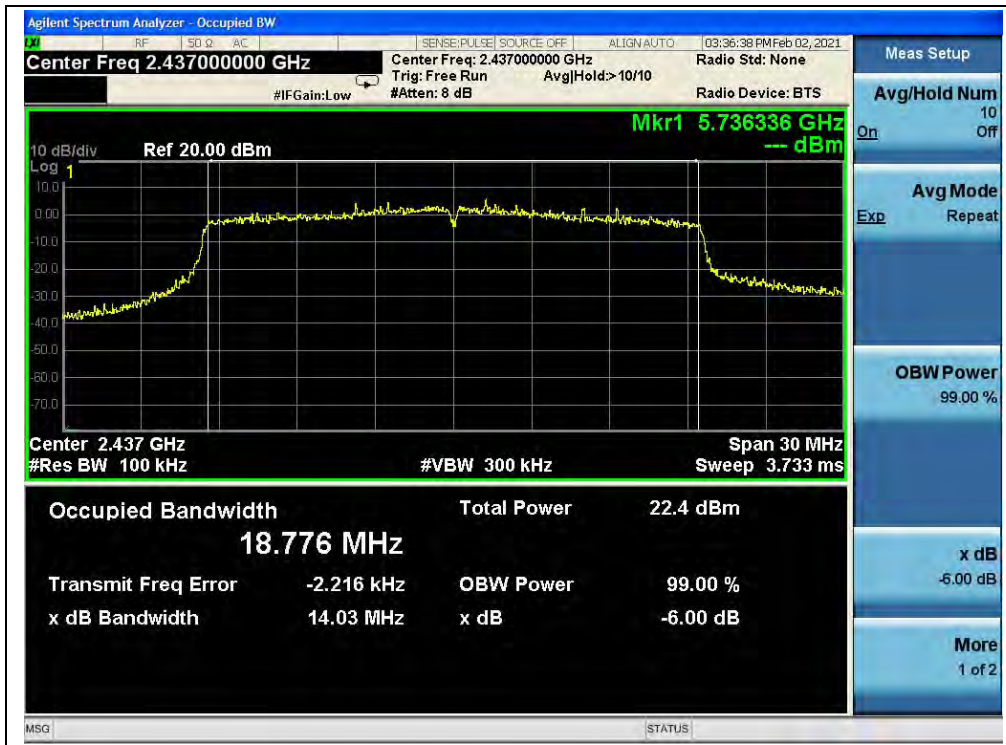

(Channel 6, 802.11ax (HEW20))



(Channel 9, 802.11ax (HEW20))




**802.11ax (HEW20)(RU26) Mode**


**A.Test Verdict:**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	2.13	≥500	PASS
6	2437	2.10	≥500	PASS
11	2462	2.11	≥500	PASS


**B.Test Plot:**

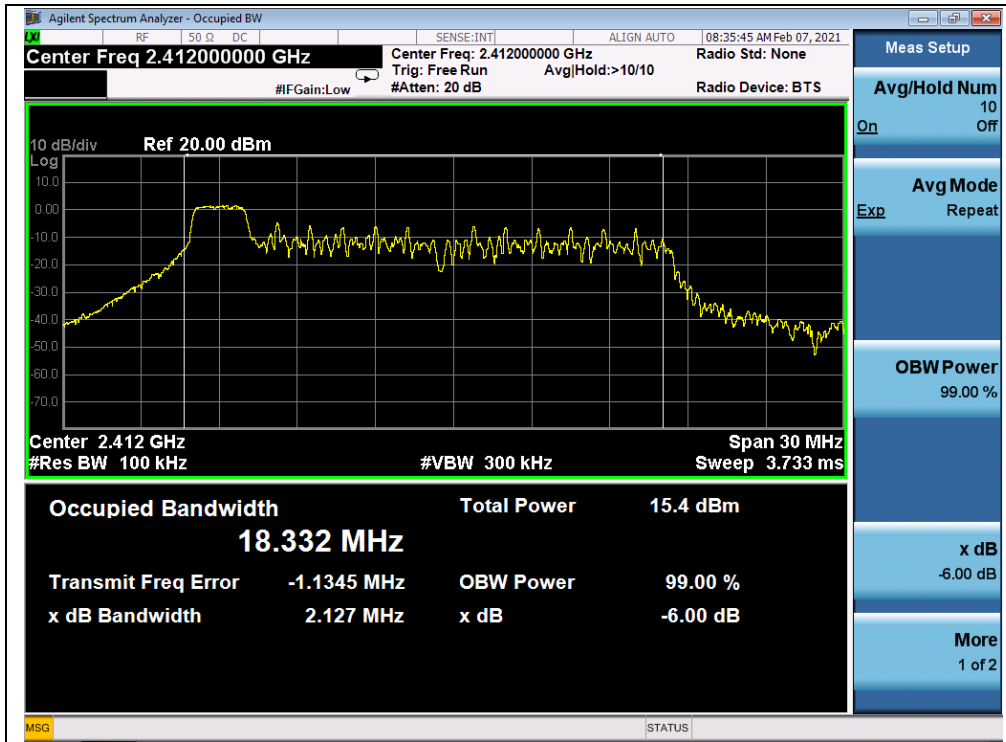

(Channel 3, 802.11ax (HEW20)(RU26))

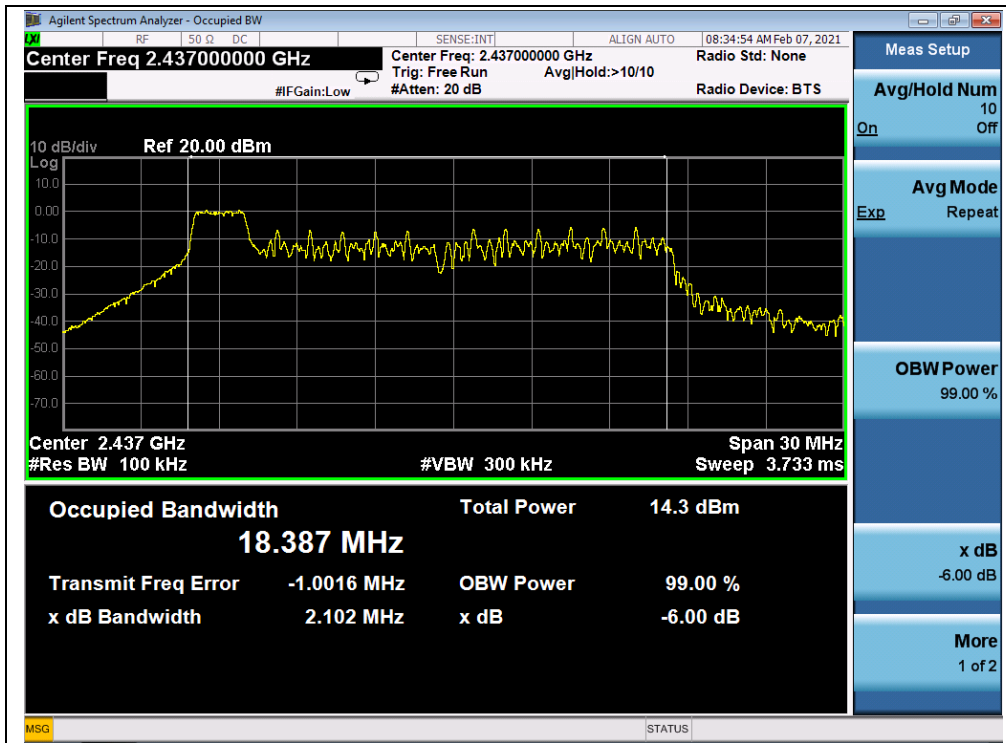

(Channel 6, 802.11ax (HEW20)(RU26))

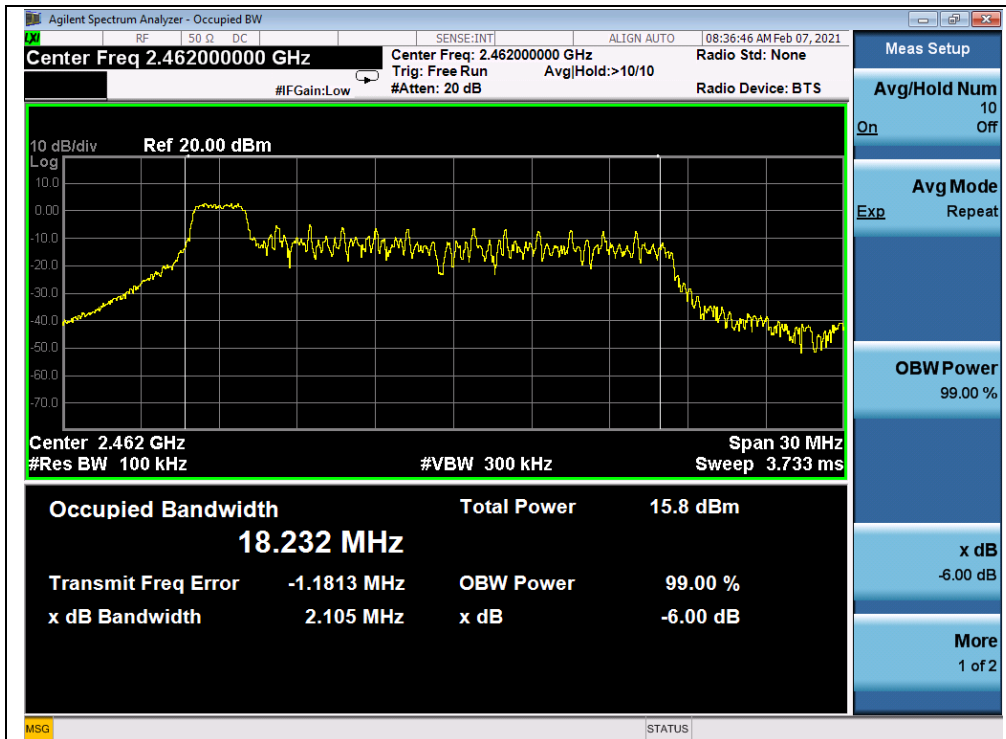

(Channel 9, 802.11ax (HEW20)(RU26))




**802.11ax (HEW20)(RU52) Mode**

**A.Test Verdict:**


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	17.09	≥500	PASS
6	2437	15.78	≥500	PASS
11	2462	17.03	≥500	PASS

**B.Test Plot:**

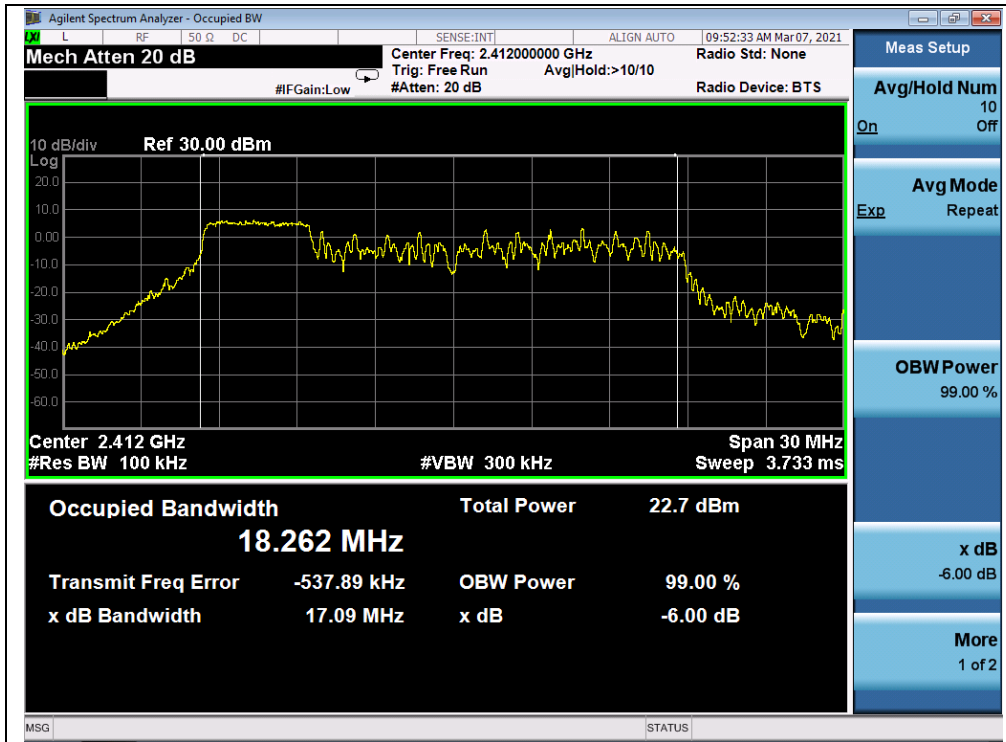


(Channel 3, 802.11ax (HEW20)(RU52))



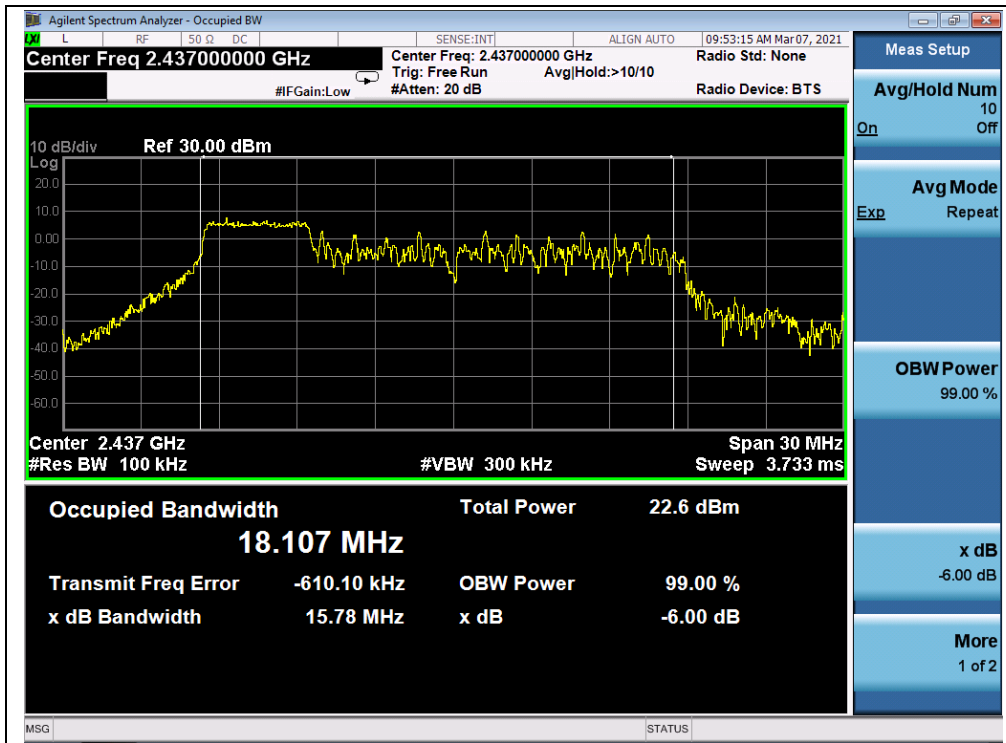


(Channel 6, 802.11ax (HEW20)(RU52))

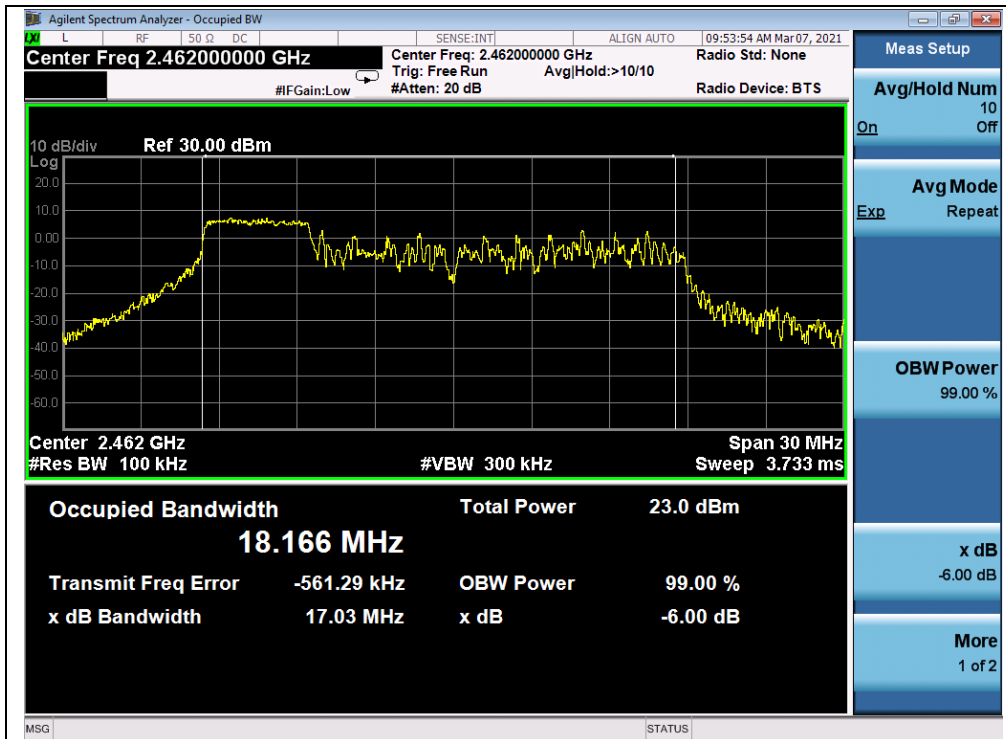


(Channel 9, 802.11ax (HEW20)(RU52))



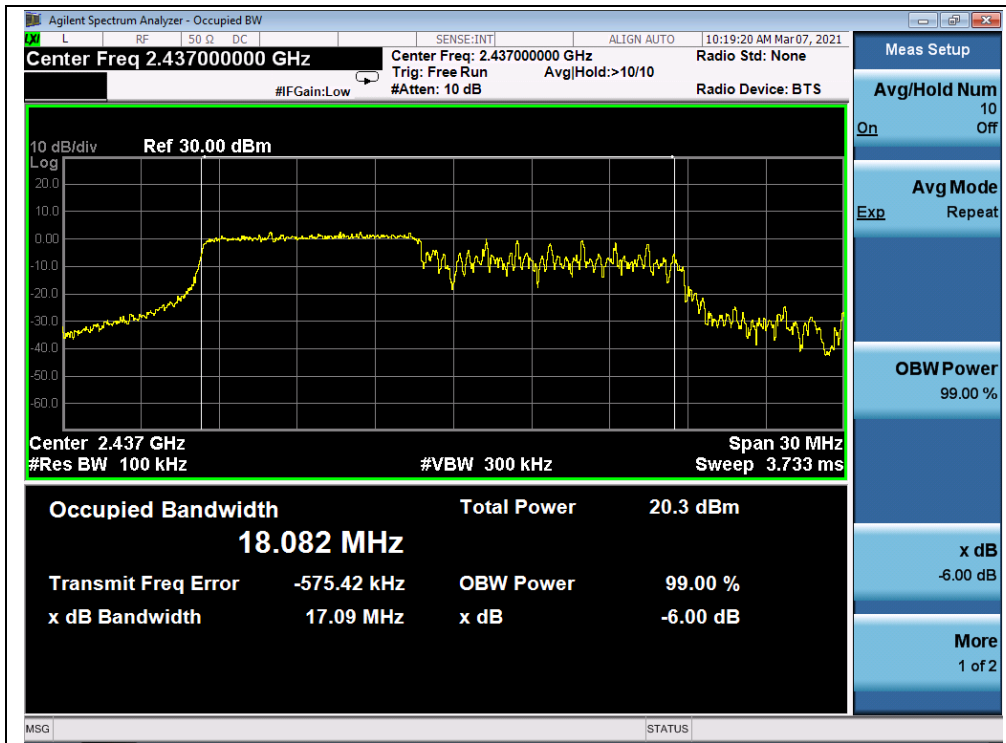

(Channel 6, 802.11ax (HEW20)(RU106))

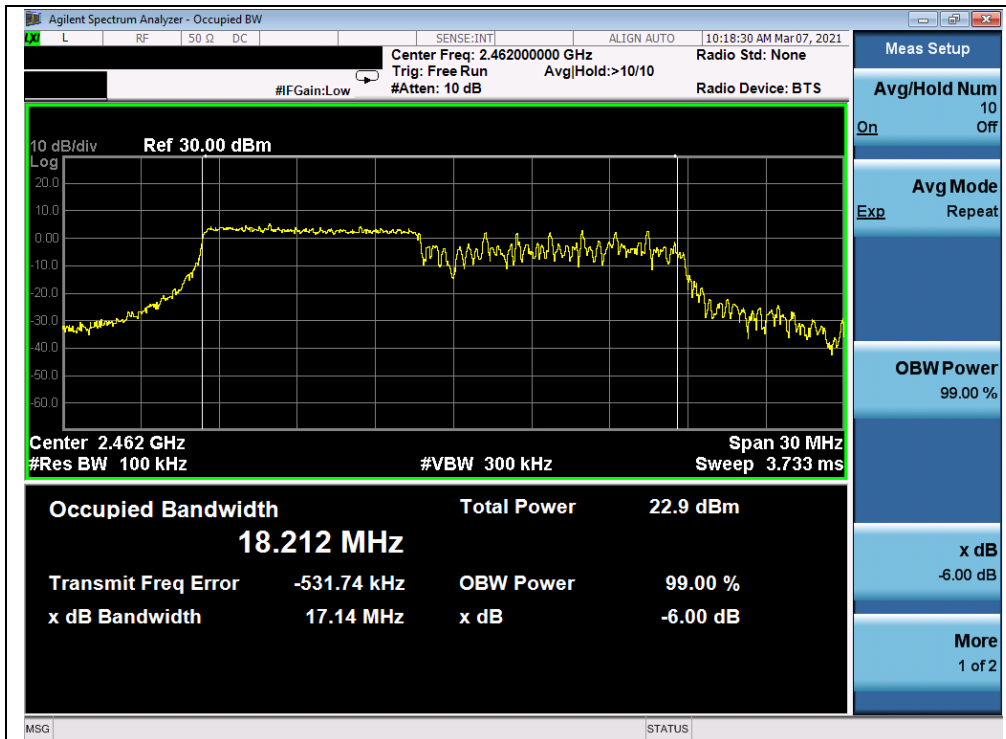

(Channel 9, 802.11ax (HEW20)(RU106))




## 2.5. Conducted Spurious Emissions and Band Edge

### 2.5.1. Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 2.5.2. Test Description

#### Test Setup:

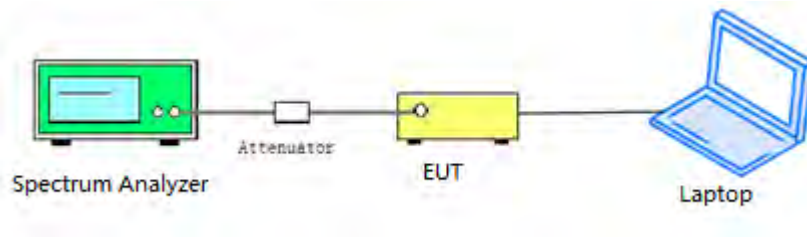

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

### 2.5.3. Test Procedure

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.



2.5.4. Test Result

802.11b Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-33.46	8.57	-11.43	PASS
6	2437	-42.58	3.70	-16.30	PASS
11	2462	-32.55	6.93	-13.07	PASS


B. Test Plot:



(30MHz to 25GHz, Channel 1, 802.11b)

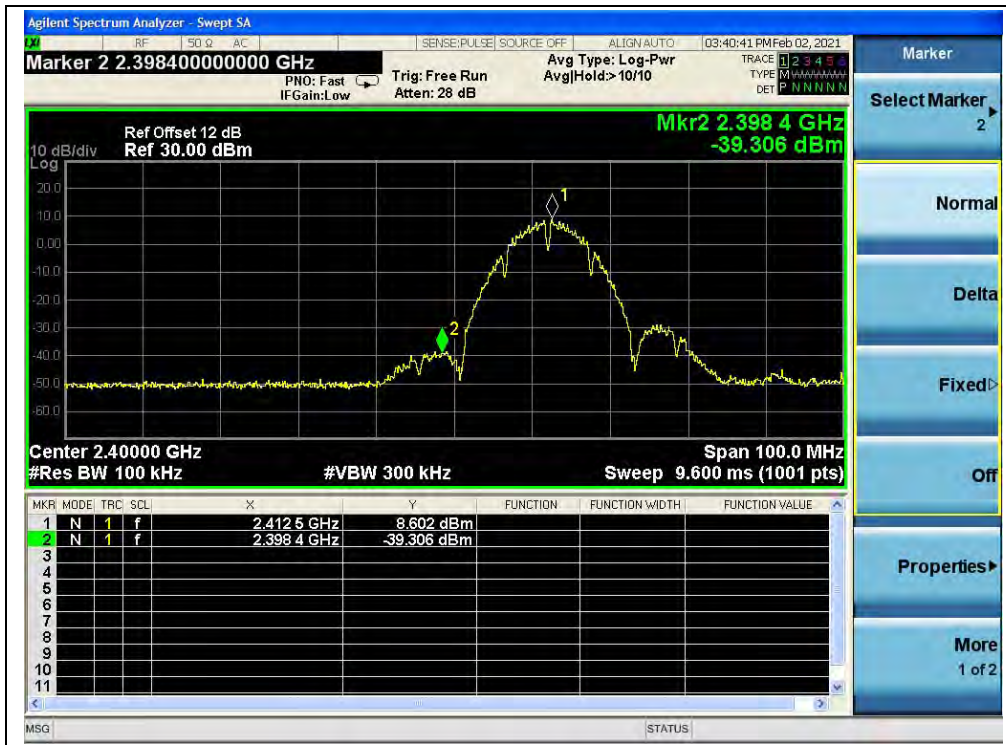


(Band Edge, Channel 1, 802.11b)

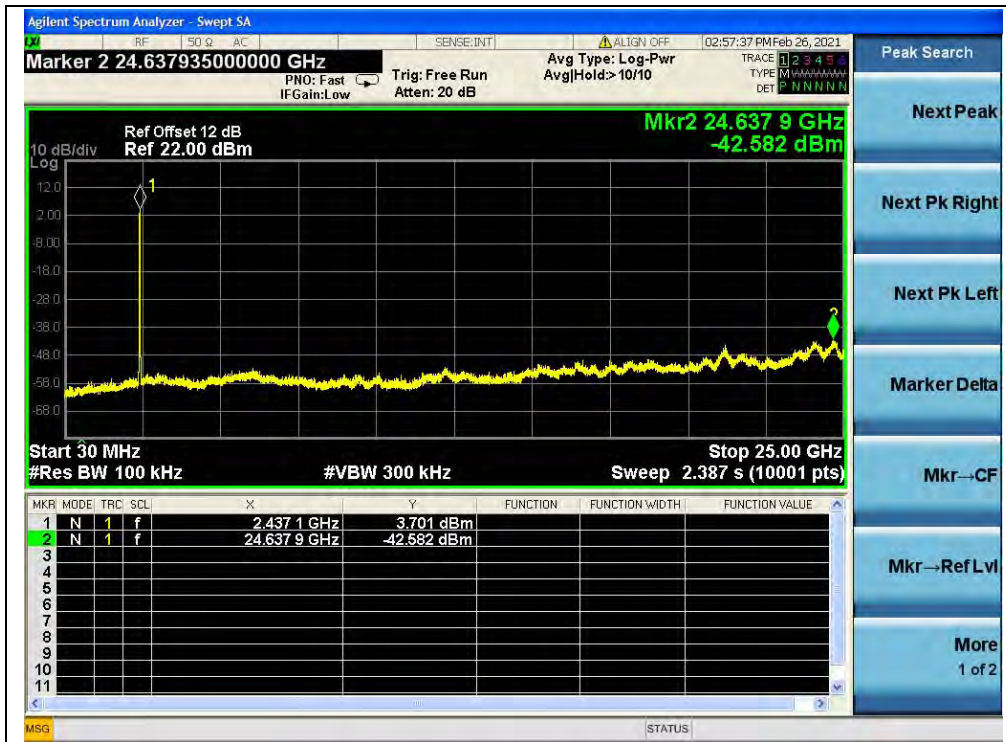


(30MHz to 25GHz, Channel 6, 802.11b)



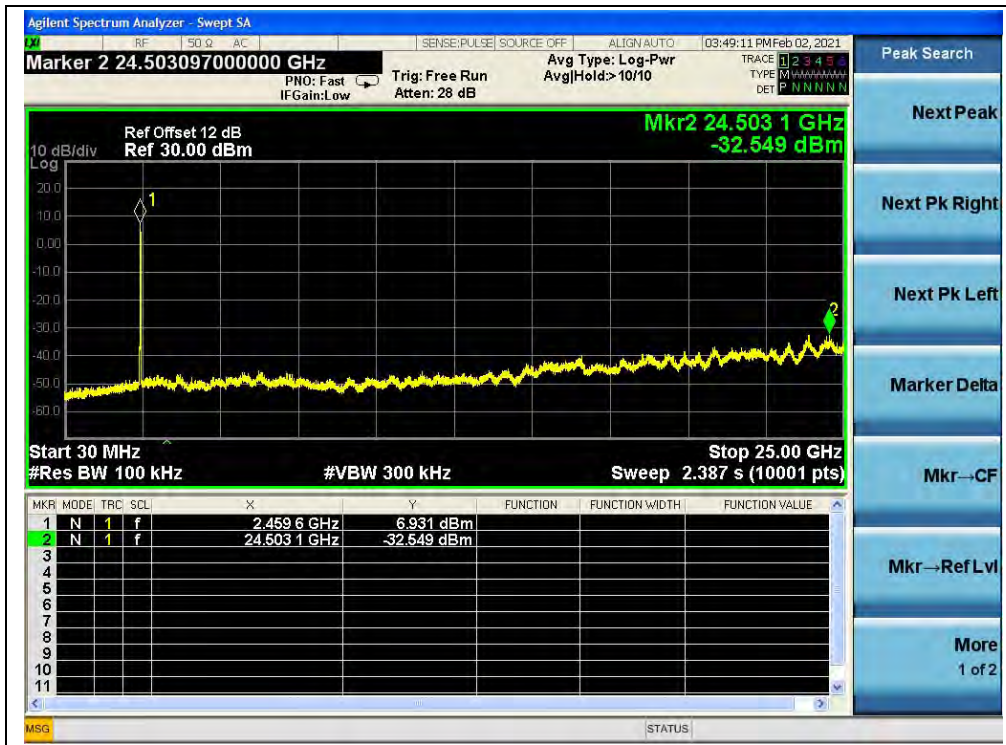

(30MHz to 25GHz, Channel 11, 802.11b)

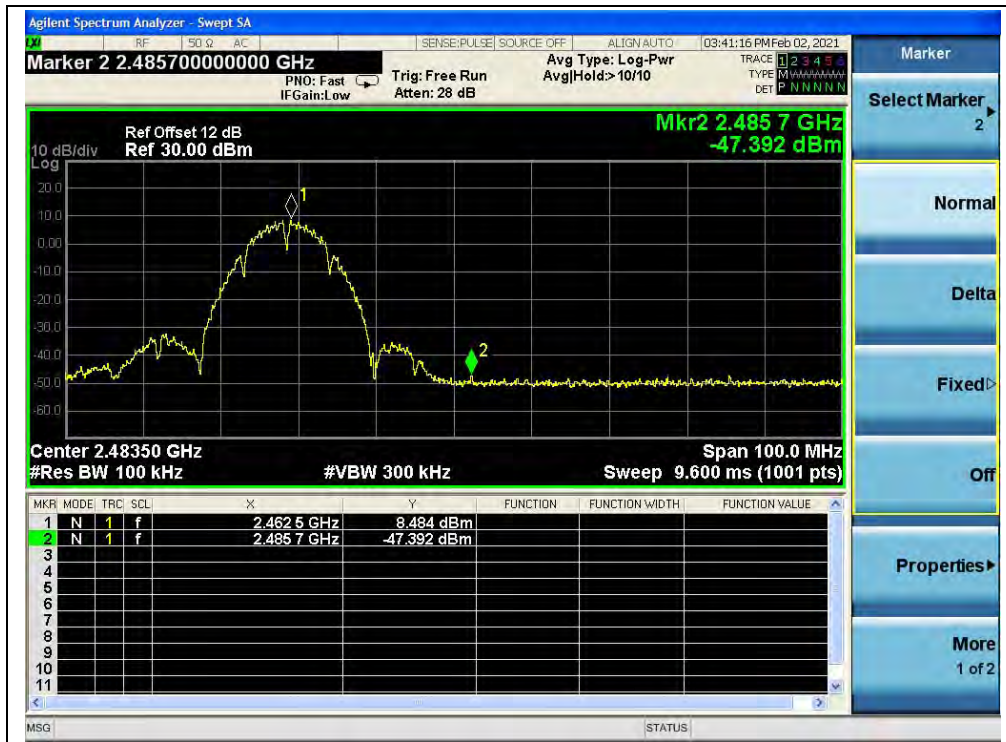

(Band Edge, Channel 11, 802.11b)




802.11g Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-34.43	4.94	-15.06	PASS
6	2437	-34.29	7.41	-12.59	PASS
11	2462	-33.97	5.79	-14.21	PASS


B. Test Plot:

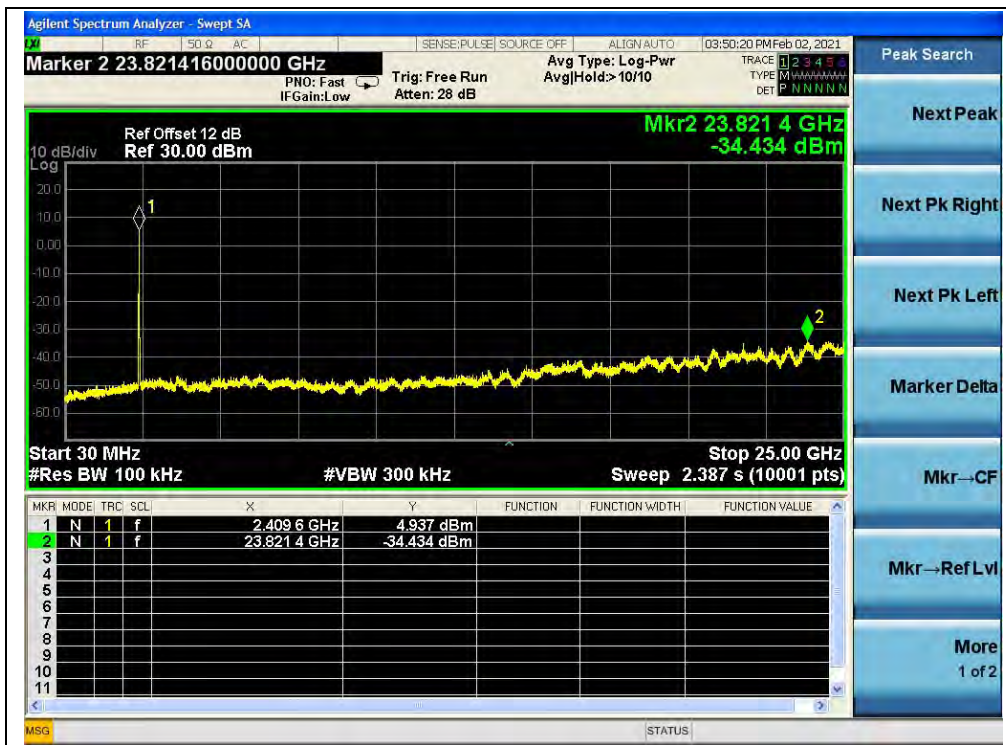

(30MHz to 25GHz, Channel 1, 802.11g)

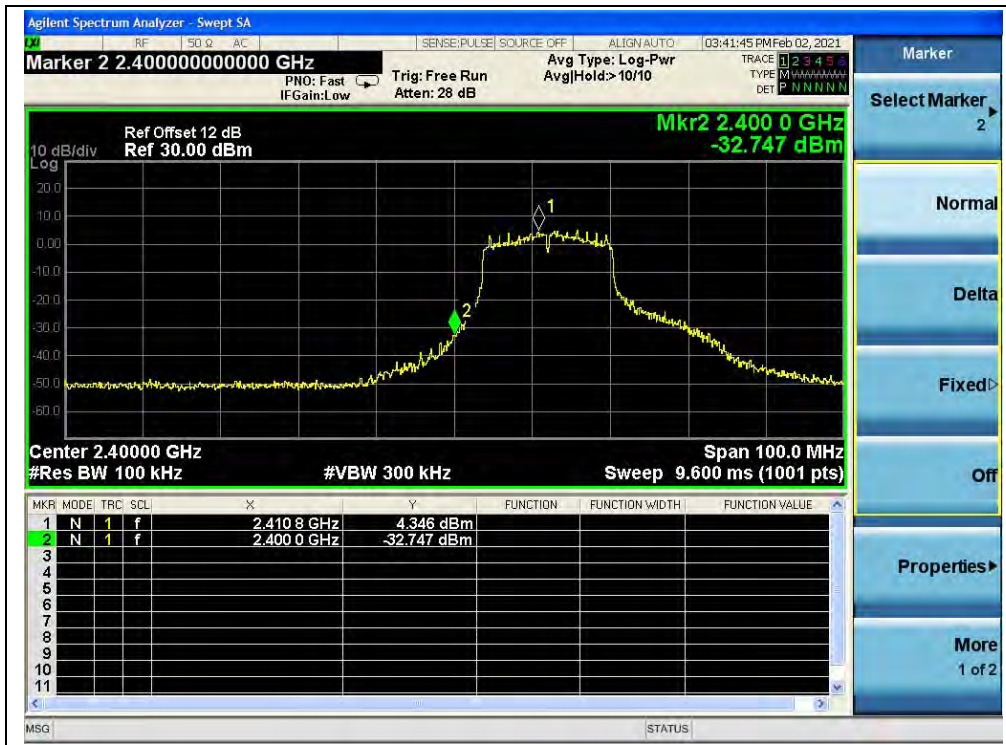

(Band Edge, Channel 1, 802.11g)

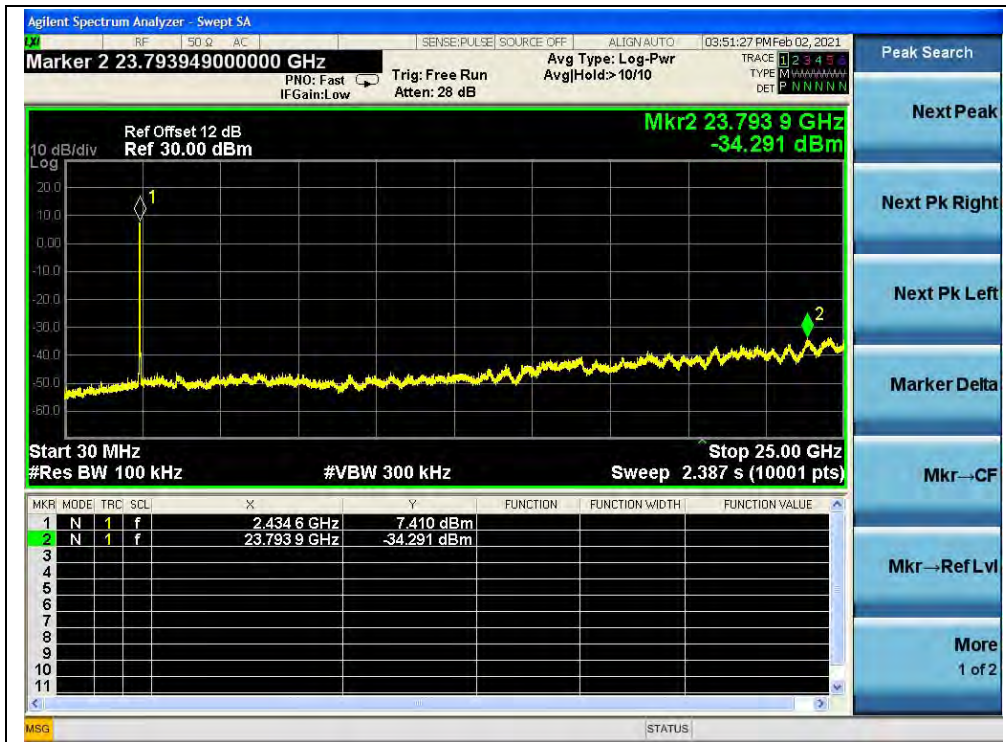


(30MHz to 25GHz, Channel 6, 802.11g)





(30MHz to 25GHz, Channel 11, 802.11g)

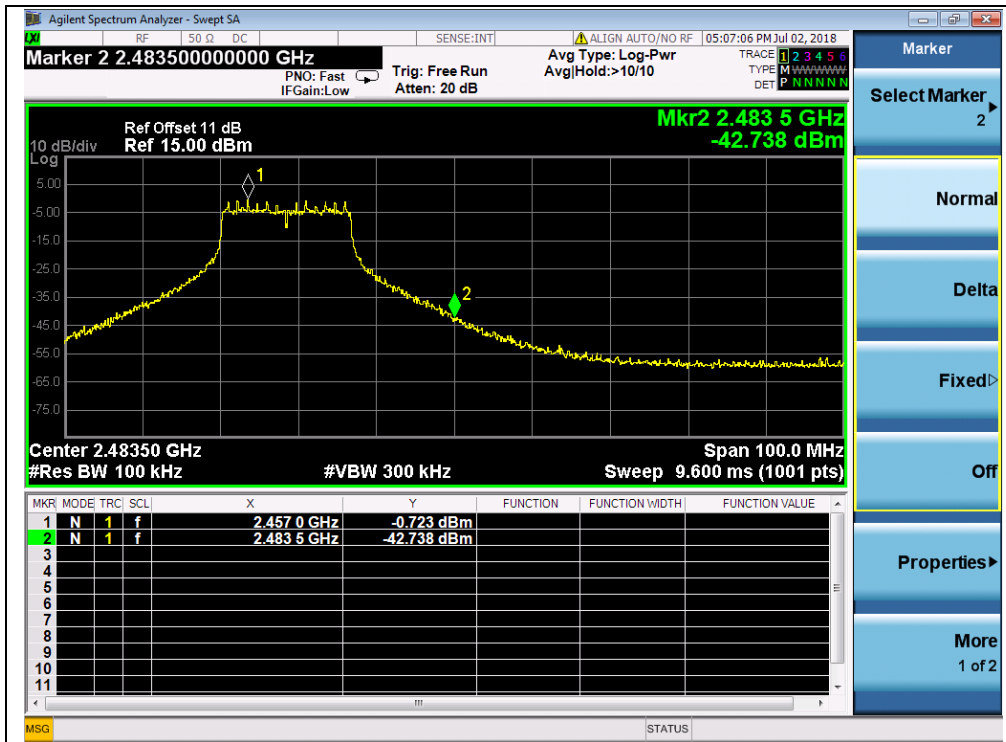

(Band Edge, Channel 11, 802.11g)




802.11n (HT20) Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-34.52	4.86	-15.14	PASS
6	2437	-34.22	5.79	-14.21	PASS
11	2462	-33.65	6.41	-13.59	PASS

B. Test Plot:

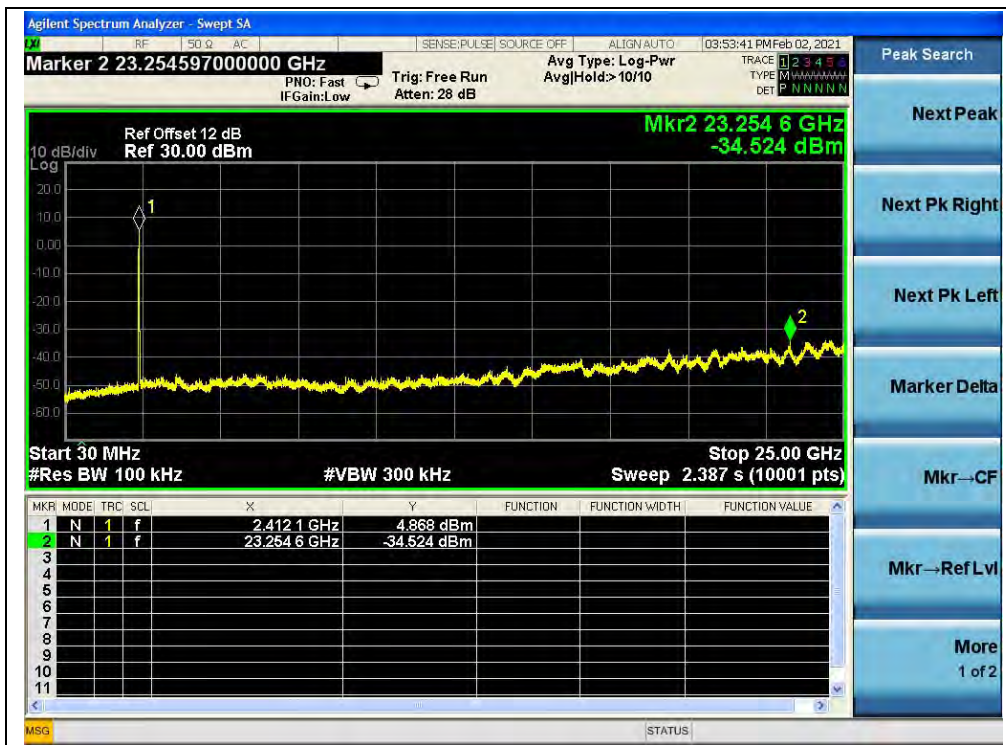


(30MHz to 25GHz, Channel 1, 802.11n (HT20))





(Band Edge, Channel 1, 802.11n (HT20))

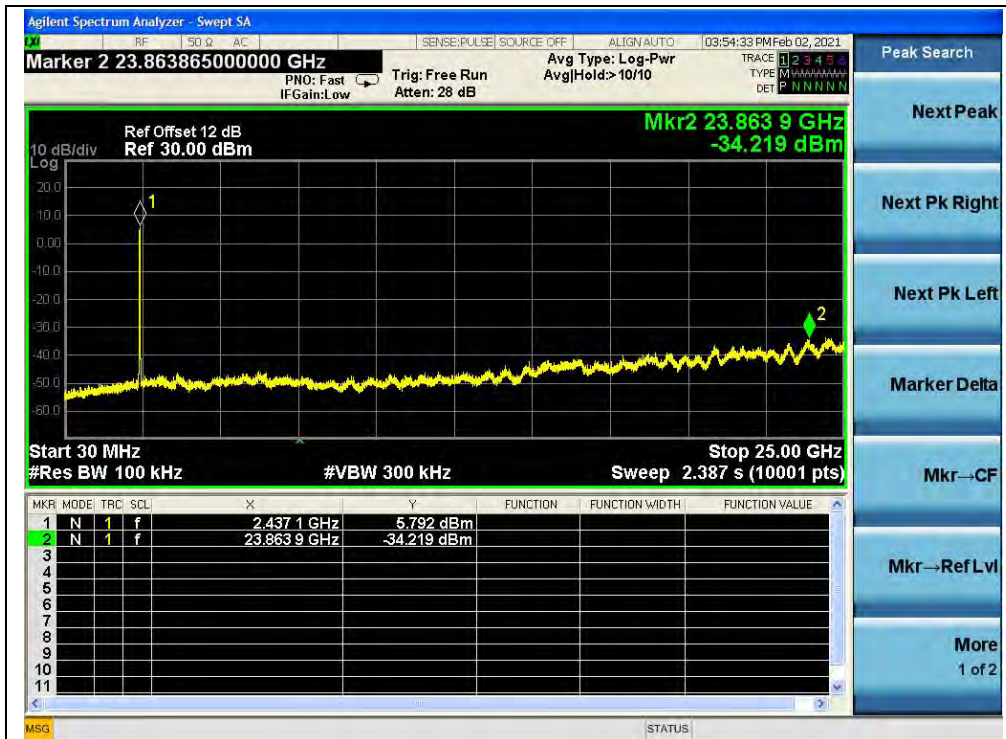

(30MHz to 25GHz, Channel 6, 802.11n (HT20))



(30MHz to 25GHz, Channel 11, 802.11n (HT20))



(Band Edge, Channel 11, 802.11n (HT20))




802.11ax (HEW20) Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-34.12	4.95	-15.05	PASS
6	2437	-34.82	4.47	-15.53	PASS
11	2462	-34.14	6.08	-13.92	PASS

B. Test Plot:

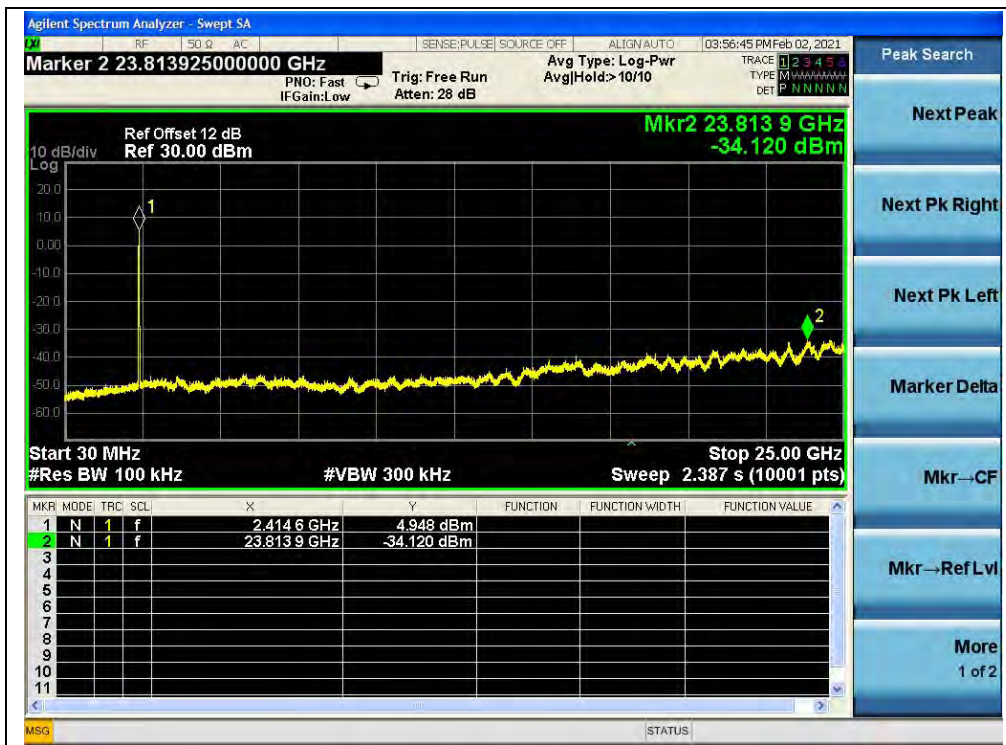


(30MHz to 25GHz, Channel 1, 802.11ax (HEW20))




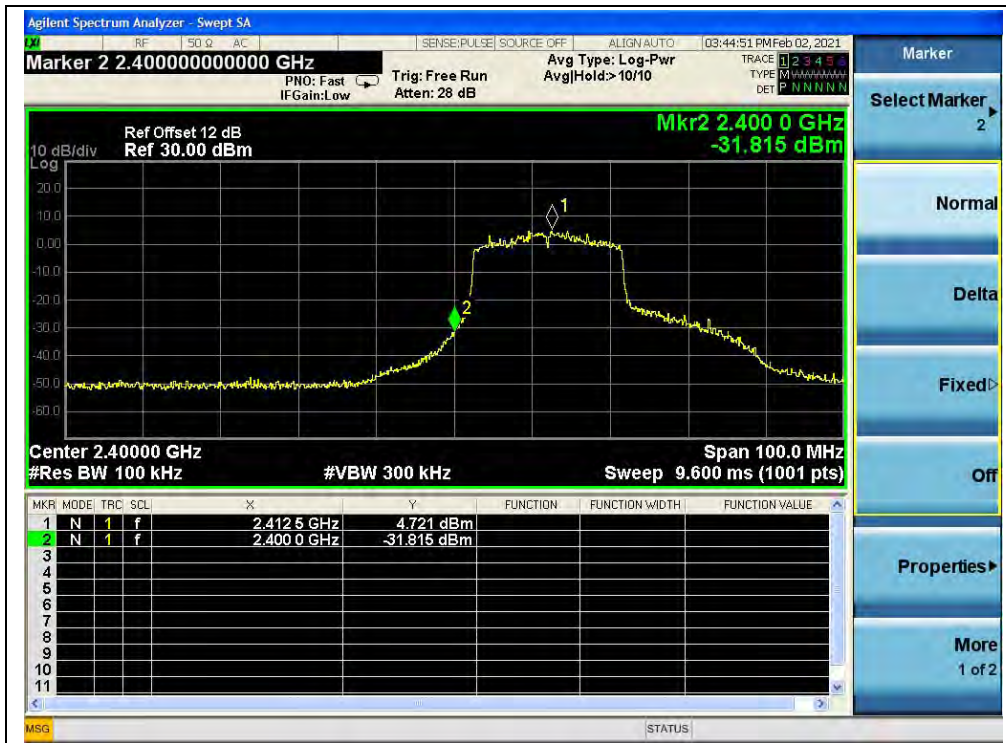


(Band Edge, Channel 1, 802.11ax (HEW20))

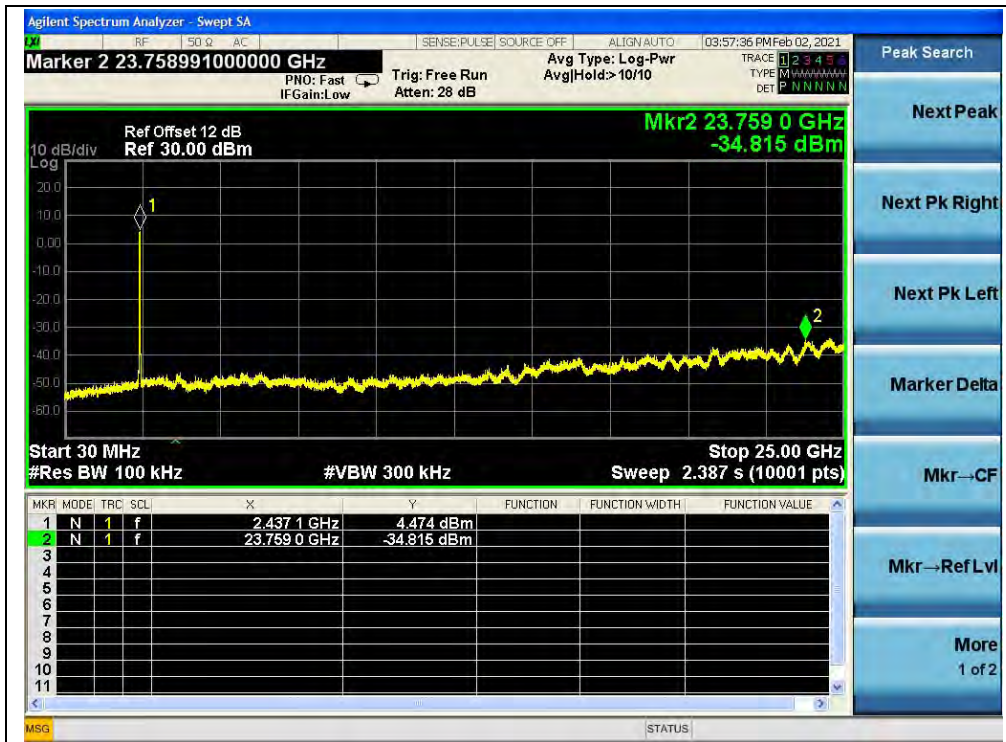

(30MHz to 25GHz, Channel 6, 802.11ax (HEW20))

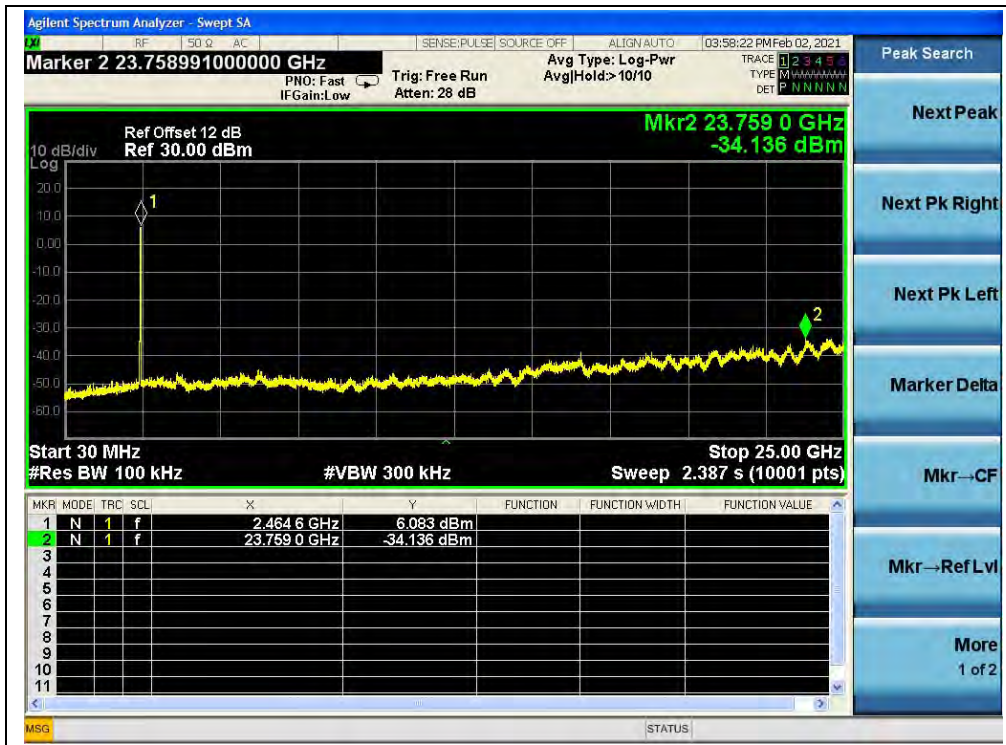

(30MHz to 25GHz, Channel 11, 802.11ax (HEW20))

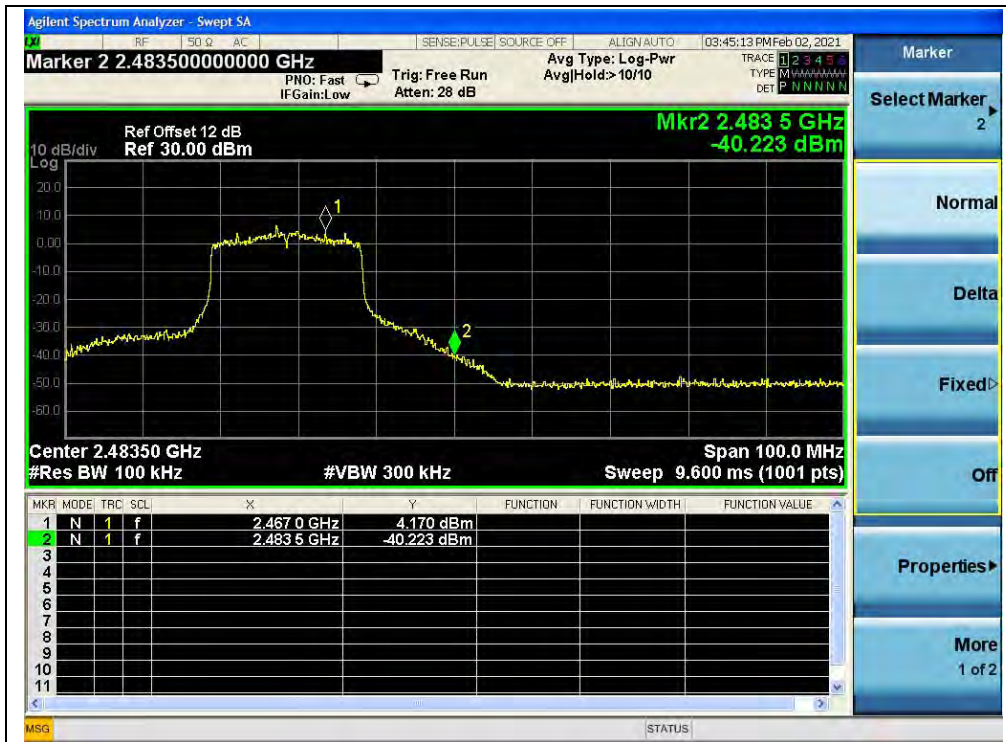

(Band Edge, Channel 11, 802.11ax (HEW20))




802.11ax (HEW20)(RU26) Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-60.71	2.09	-17.91	PASS
6	2437	-56.94	0.69	-19.31	PASS
11	2462	-60.43	1.75	-18.25	PASS


B. Test Plot:

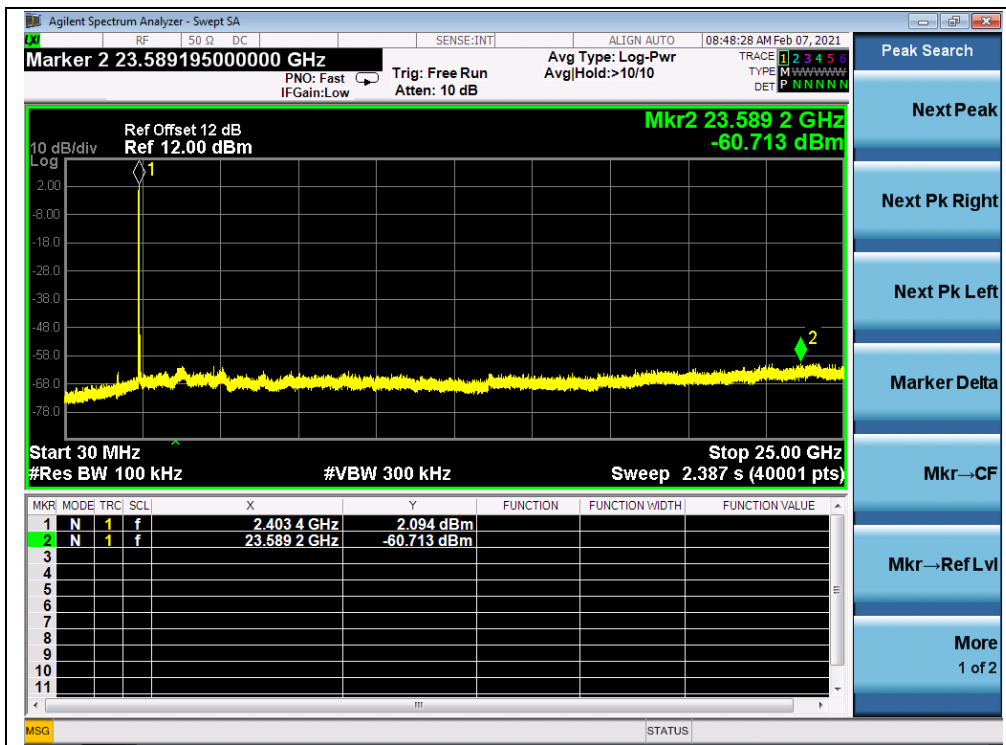

(30MHz to 25GHz, Channel 1, 802.11ax (HEW20)(RU26))




(Band Edge, Channel 1, 802.11ax (HEW20)(RU26))

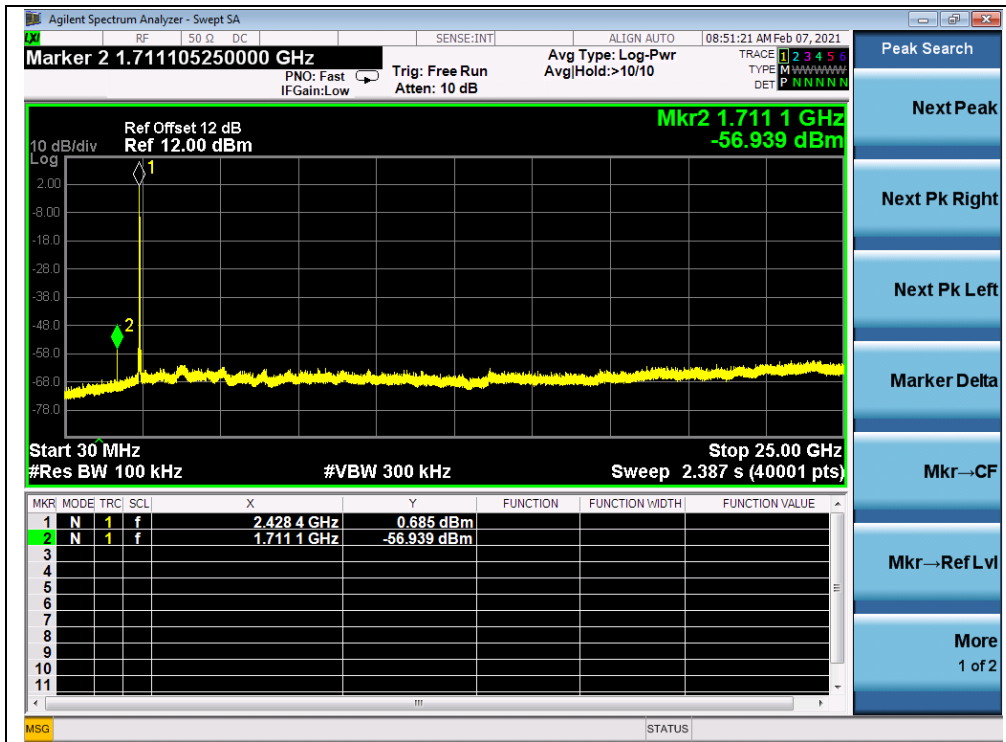

(30MHz to 25GHz, Channel 6, 802.11ax (HEW20)(RU26))



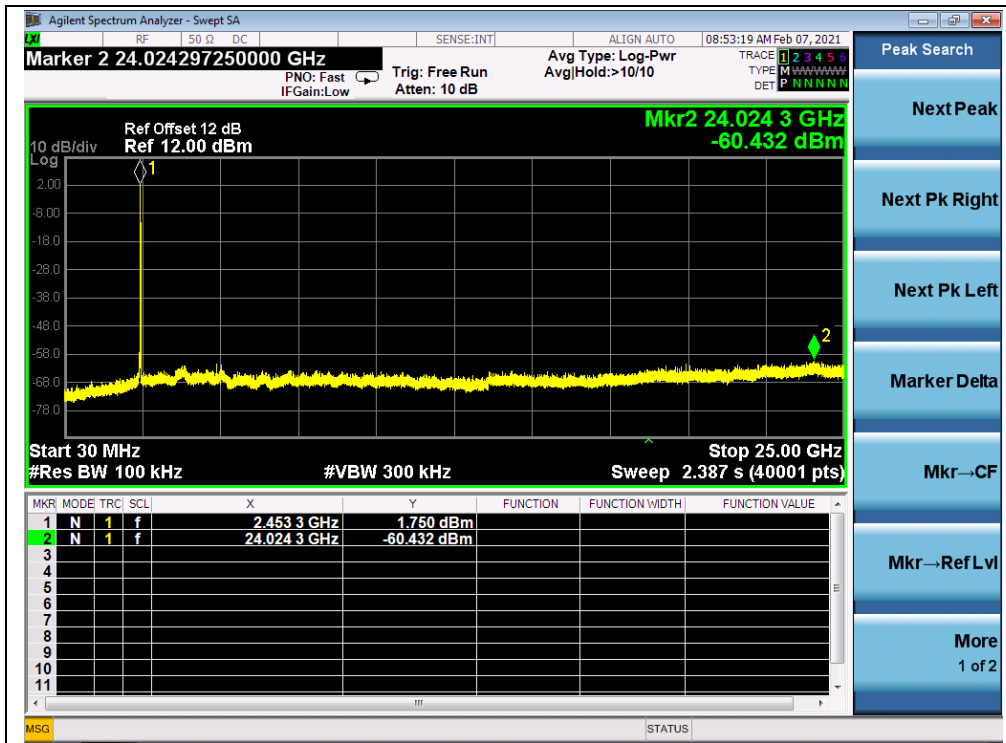

(30MHz to 25GHz, Channel 11, 802.11ax (HEW20)(RU26))



(Band Edge, Channel 11, 802.11ax (HEW20)(RU26))






802.11ax (HEW20)(RU52) Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-50.42	3.22	-16.78	PASS
6	2437	-50.88	5.79	-14.21	PASS
11	2462	50.85	6.58	-13.42	PASS

B. Test Plot:

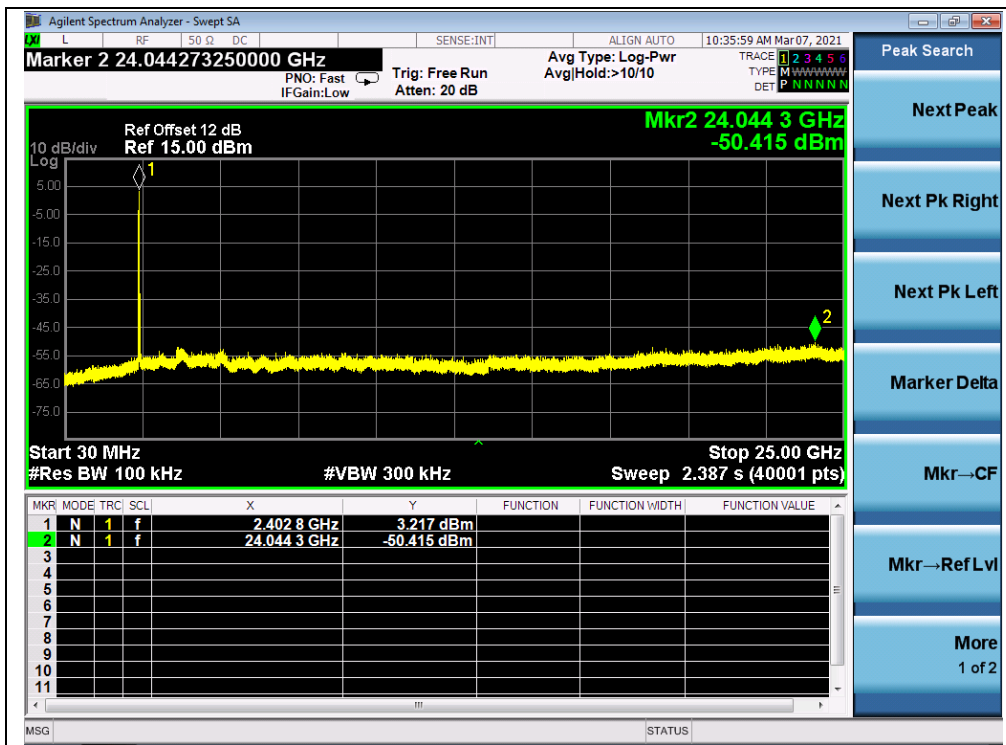


(30MHz to 25GHz, Channel 1, 802.11ax (HEW20)(RU52))



(Band Edge, Channel 1, 802.11ax (HEW20)(RU52))



(30MHz to 25GHz, Channel 6, 802.11ax (HEW20)(RU52))

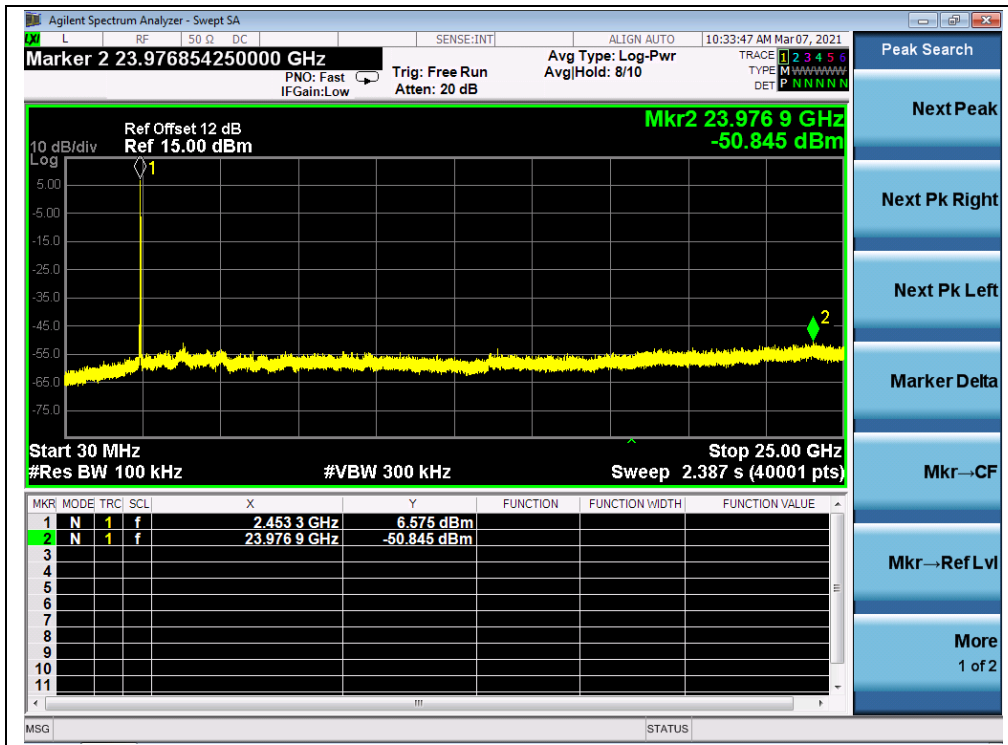

(30MHz to 25GHz, Channel 11, 802.11ax (HEW20)(RU52))



(Band Edge, Channel 11, 802.11ax (HEW20)(RU52))




802.11ax (HEW20)(RU106) Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-50.17	1.00	-19.00	PASS
6	2437	-50.90	2.63	-17.37	PASS
11	2462	-50.73	3.16	-16.84	PASS


B. Test Plot:

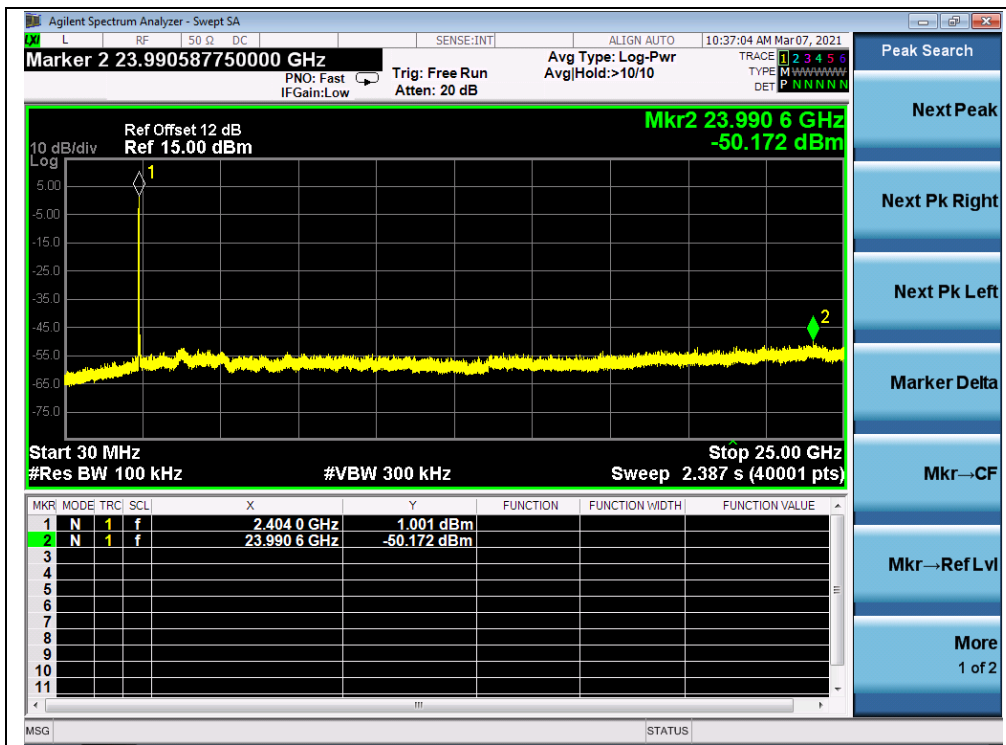


(30MHz to 25GHz, Channel 1, 802.11ax (HEW20)(RU106))



(Band Edge, Channel 1, 802.11ax (HEW20)(RU106))

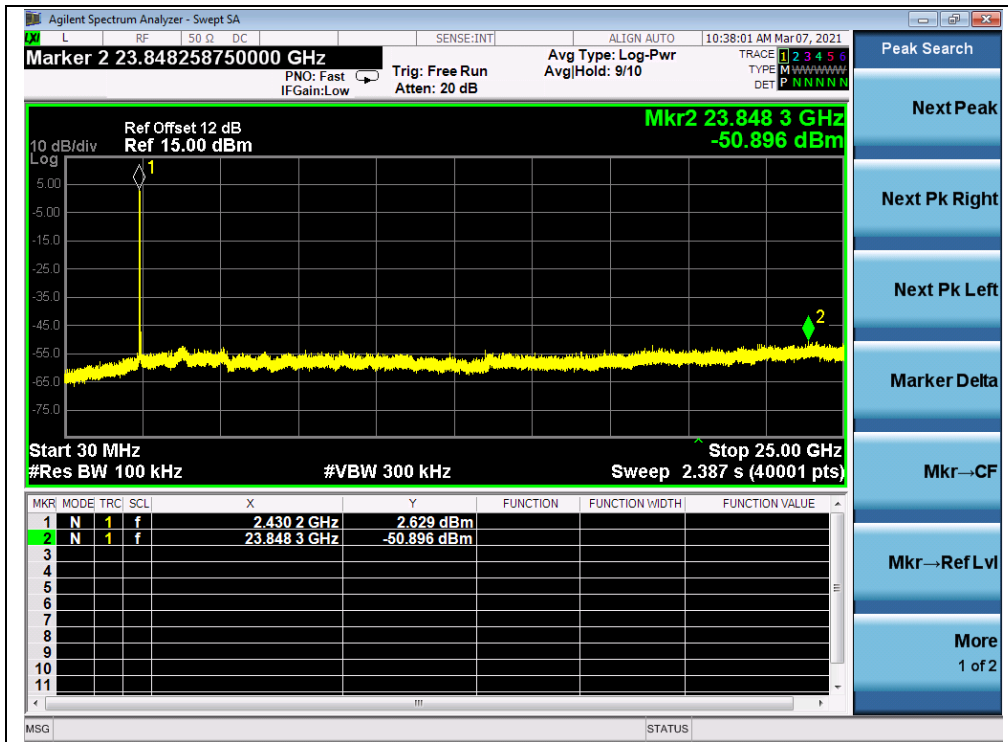

(30MHz to 25GHz, Channel 6, 802.11ax (HEW20)(RU106))

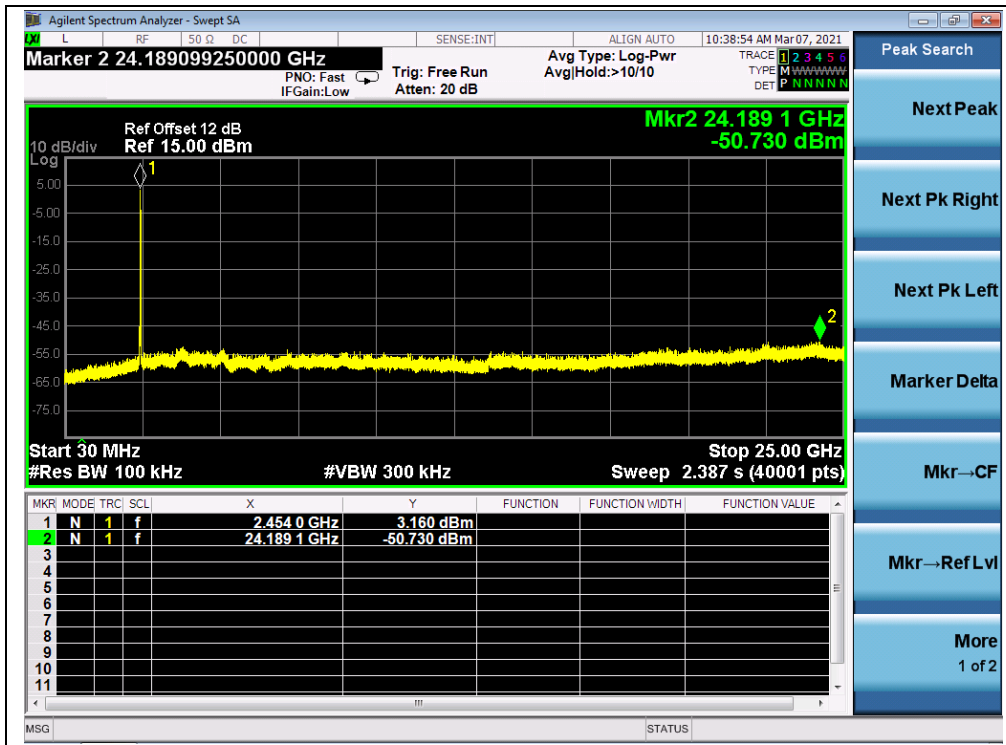

(30MHz to 25GHz, Channel 11, 802.11ax (HEW20)(RU106))



(Band Edge, Channel 11, 802.11ax (HEW20)(RU106))


## 2.6. Power Spectral Density (PSD)

### 2.6.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 2.6.2. Test Description

#### Test Setup:

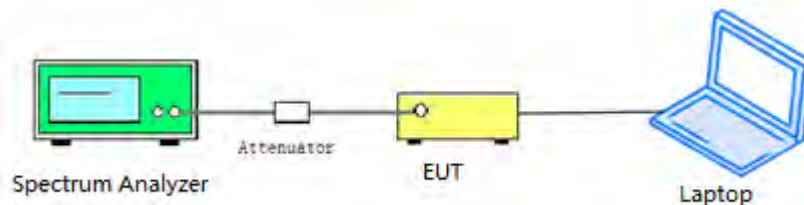

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

### 2.6.3. Test Procedure

KDB 558074 Section 8.4 was used in order to prove compliance.





2.6.4. Test Result

802.11b Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)		Limit (dBm/3kHz)	Verdict
		ANT 0	ANT 1		
1	2412	-6.41	-6.59	8	PASS
6	2437	-6.89	-5.55	8	PASS
11	2462	-5.95	-6.20	8	PASS

B. Test Plot:



(Channel 1, 802.11b, ANT0)



(Channel 6, 802.11b, ANT0)



(Channel 11, 802.11b, ANT0)



(Channel 1, 802.11b, ANT1)



(Channel 6, 802.11b, ANT1)





(Channel 11, 802.11b, ANT1)




802.11g Mode

A.Test Verdict:

Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)		Limit (dBm/3kHz)	Verdict
		ANT 0	ANT 1		
1	2412	-6.94	-7.35	8	PASS
6	2437	-5.30	-8.75	8	PASS
11	2462	-6.96	-9.23	8	PASS

B.Test Plot:

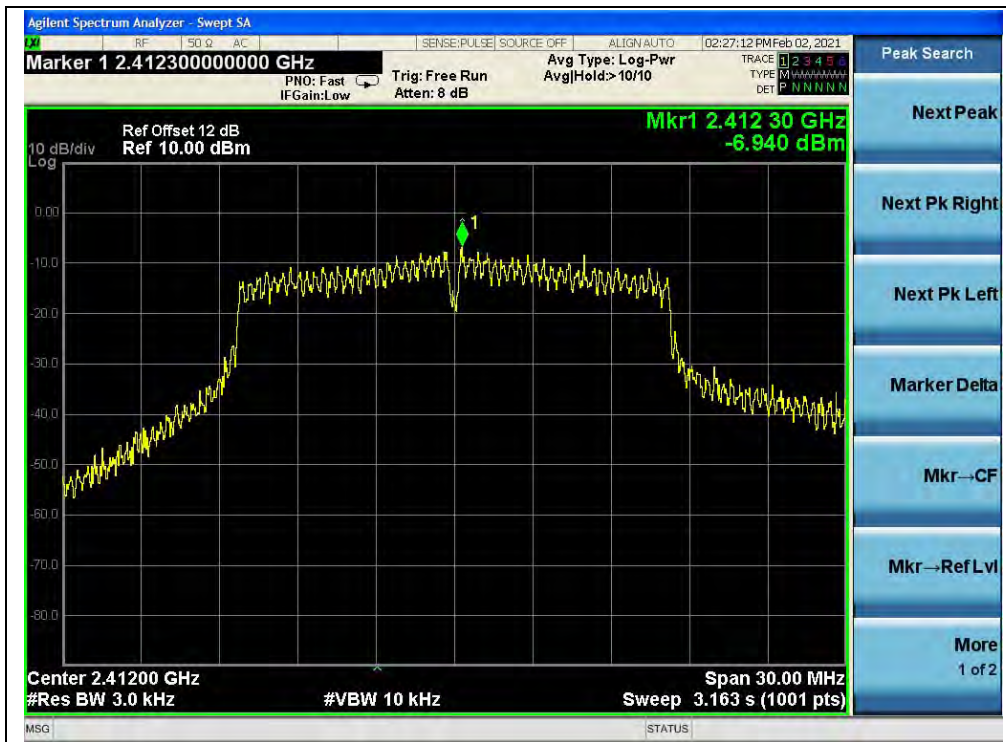

(Channel 1, 802.11g, ANT0)



(Channel 6, 802.11g, ANT0)



(Channel 11, 802.11g, ANT0)