



TEST REPORT

APPLICANT : Nubia Technology Co., Ltd.
PRODUCT NAME : 5G Mobile Phone
MODEL NAME : NX679J
BRAND NAME : REDMAGIC
FCC ID : 2AHJO-NX679J
STANDARD(S) : 47 CFR Part 15 Subpart E
RECEIPT DATE : 2021-10-22
TEST DATE : 2021-11-10 to 2021-12-15
ISSUE DATE : 2022-01-10

Edited by: Peng Mi
Peng Mi (Rapporteur)
Approved by: Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

- 1. Technical Information..... 3**
- 1.1. Applicant and Manufacturer Information 3**
- 1.2. Equipment Under Test (EUT) Description 3**
- 1.3. Modulation Type and Data Rate of EUT 6**
- 1.4. The Channel Number and Frequency..... 8**
- 1.5. Test Standards and Results..... 9**
- 1.6. Environmental Conditions.....10**
- 2. 47 CFR Part 15E Requirements..... 11**
- 2.1. Antenna Requirement 11**
- 2.2. Duty Cycle of the Test Signal 12**
- 2.3. Maximum Conducted Output Power 19**
- 2.4. Emission Bandwidth 28**
- 2.5. Peak Power Spectral Density 91**
- 2.6. Frequency Stability 158**
- 2.7. Conducted Emission 161**
- 2.8. Restricted Frequency Bands 165**
- 2.9. Radiated Emission 194**
- Annex A Test Uncertainty 249**
- Annex B Testing Laboratory Information 250**

Change History		
Version	Date	Reason for change
1.0	2022-01-10	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Nubia Technology Co., Ltd.
Applicant Address:	Room 1801, Building 2, Chongwen Park, Nanshan Zhiyuan, No.3370, Liuxian Rd, Nanshan District, Shenzhen City, Guangdong Province, P. R. China
Manufacturer:	Nubia Technology Co., Ltd.
Manufacturer Address:	Room 1801, Building 2, Chongwen Park, Nanshan Zhiyuan, No.3370, Liuxian Rd, Nanshan District, Shenzhen City, Guangdong Province, P. R. China

1.2. Equipment Under Test (EUT) Description

Product Name:	5G Mobile Phone
Sample No.:	1#
Hardware Version:	NX679J_V1AMB
Software Version:	NX679J_UNCommon_V4.01
Modulation Technology:	OFDM
Modulation Mode:	802.11a, 802.11n (HT20), 802.11n (HT40) 802.11ac (VHT20), 802.11ac (VHT40), 802.11ac (VHT80) 802.11ax (HEW20), 802.11ax (HEW40), 802.11ax (HEW80)
Operating Frequency Range:	5180MHz-5240MHz; 5260MHz-5320MHz; 5500MHz-5720MHz; 5745MHz-5825MHz
Channel Number:	Refer to 1.3
Antenna Type:	PIFA Antenna
Antenna Gain:	ANT 0: 0.50dBi; ANT 1: 0.50dBi
Directional Gain:	3.51dBi _{Note 2}

Accessory Information:	Battery	
	Brand Name:	nubia
	Model No.:	Li3945T44P8h556490
	Serial No.:	N/A
	Capacity:	2190mAh
	Rated Voltage:	7.74V
	Charge Limit:	8.9V
	Manufacturer:	Dongguan Amperex Technology Limited
	AC Adapter	
	Brand Name:	nubia
	Model No.:	STC-A59152050AC-Z
	Serial No.:	N/A
	Rated Output:	5.0V=3.0A, 9.0V=3.0A, 15V=3.0A, 20V=3.25A PPS: 5.0V-11.0V=5.0A, 5.0V-20.0V=3.25A
	Rated Input:	100-240V~50/60Hz, 1.5A
	Rated Output:	ShenZhen KunXing Technology Co.,Ltd.
	Rated Input:	nubia
	Manufacturer:	STC-A59152050AC-Z
	Manufacturer:	SHENZHEN HUNTKEY ELECTRIC CO., LTD.
	Model No.:	N52111200016D

Note 1: The EUT supports a MIMO function. Physically, the EUT provides two completed transmitters and two receivers for 802.11n, 802.11ac and 802.11ax modulation mode.

Modulation Mode:	TX Function
802.11n	2TX
802.11ac	2TX
802.11ax	2TX

Note 2: According to KDB 662911 D01, the directional gain = $G_{ANT} + 10\log(N_{ANT})$ dBi, where G_{ANT} is the maximum antenna gain in dBi, N_{ANT} is the number of outputs.

Note 3: For conducted test item Conducted Output Power and Peak Power Spectral Density of each modulation mode, we recorded the test result of two antennas separately, for other conducted test items both of the two antennas were tested separately, we only recorded the worst test result (ANT1) in this report.

Note 4: All radiation test items for 802.11n, 802.11ac and 802.11ax modulation mode operate at MIMO mode during the test. Other modulation mode operate at SISO mode, both of the two antennas were tested separately, we only recorded the worst test result(ANT1) in this report.

Note 5: WiFi hotspot only support U-NII-1 and U-NII-3 band.



REPORT No. : SZ21100183W10

Note 6: We use the dedicated software to control the EUT continuous transmission.

Note 7: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.3. Modulation Type and Data Rate of EUT

Modulation Technology	Modulation Type	Data Rate (Mbps)
OFDM (802.11a)	BPSK	6 / 9
	QPSK	12 / 18
	16QAM	24 / 36
	64QAM	48 / 54
OFDM (802.11n (HT20))	BPSK	6.5
	QPSK	13/19.5
	16QAM	26/39
	64QAM	52/58.5/65
OFDM (802.11n (HT40))	BPSK	13.5
	QPSK	27/40.5
	16QAM	54/81
	64QAM	108/121.5/135
OFDM (802.11ac (VHT20))	BPSK	6.5
	QPSK	13.0/19.5
	16QAM	26.0/39.0
	64QAM	52.0/58.5/65.0
	256QAM	78.0
OFDM (802.11ac (VHT40))	BPSK	13.5
	QPSK	27.0/40.5
	16QAM	54.0/81.0
	64QAM	108.0/121.5/135.0
	256QAM	162.0/180.0
OFDM (802.11ac (VHT80))	BPSK	29.3
	QPSK	58.5/87.8
	16QAM	117.0/175.5
	64QAM	234.0/263.3/292.5
	256QAM	351.0/390.0



Modulation Technology	Modulation Type	Data Rate (Mbps)
OFDMA (802.11ax(HEW20))	BPSK	8.6
	QPSK	17.2/25.8
	16QAM	34.4/51.6
	64QAM	68.8/77.4/86
	256QAM	103.2/114.7
	1024QAM	129/143.4
	4096QAM	154.8/172.1
OFDMA (802.11 ax(HEW40))	BPSK	17.2
	QPSK	34.4/51.6
	16QAM	68.8/103.2
	64QAM	137.6/154.9/172.1
	256QAM	206.5/229.4
	1024QAM	258.1/286.8
	4096QAM	309.7/344.2
OFDMA (802.11 ax(HEW80))	BPSK	36.0
	QPSK	72.1/108.1
	16QAM	144.1/216.2
	64QAM	288.2/324.3/360.3
	256QAM	432.4/480.4
	1024QAM	540.4/600.5
	4096QAM	648.5/720.6

Note1: The worst-case mode(black bold) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.

1.4. The Channel Number and Frequency

(U-NII-1) 5180MHz-5240MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	36	5180	40	5200
	44	5220	48	5240
40MHz	38	5190	46	5230
80MHz	42	5210		
(U-NII-2A) 5260MHz-5320MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	52	5260	56	5280
	60	5300	64	5320
40MHz	54	5270	62	5310
80MHz	58	5290		
(U-NII-2C) 5500MHz-5720MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	100	5500	105	5520
		108	112	5560
		116	120	5600
		124	128	5640
		132	136	5680
		140	144	5720
40MHz	102	5510	110	5550
		118	126	5630
		134	142	5710
80MHz	106	5530	122	5610
	138	5690		
(U-NII-3) 5745MHz-5825MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	149	5745	153	5765
	157	5785	161	5805
	165	5825		
40MHz	151	5775	159	5795
80MHz	155	5775		

Note 1: The black bold channels were selected for test.



1.5. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart E (U-NII band) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15(5-1-14 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	ANSI C63.10	Duty Cycle of the Test Signal	Nov 11, 2021	Meng Shurui	PASS	No deviation
3	15.407(a)	Maximum Conducted Output Power	Nov 15, 2021	Meng Shurui	PASS	No deviation
4	15.407(a)(e)	Emission Bandwidth	Nov 15, 2021	Meng Shurui	PASS	No deviation
5	15.407(a)	Peak Power Spectral Density	Nov 13&15, 2021	Meng Shurui	PASS	No deviation
6	15.407(g)	Frequency Stability	Nov 29, 2021	Meng Shurui	PASS	No deviation
7	15.207	Conducted Emission	Nov 10, 2021	Yang Lian	PASS	No deviation
8	15.407(b)	Restricted Frequency Bands	Dec 04&08, 2021	Su Zhan	PASS	No deviation
9	15.407(b)	Radiated Emission	Dec 08&14&15, 2021	Su Zhan	PASS	No deviation

Note 1: The DFS test report was documented in a separate report (Report No.: SZ21100183W11).

Note 2: The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.102013.

Note 3: These RF tests were performed according to the method of measurements prescribed in



KDB789033 D02 v02r01.

Note 4: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The ref offset 12.5dB contains two parts that cable loss 2.5dB and Attenuator 10dB.

Note 5: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 6: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

1.6. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



2. 47 CFR Part 15E Requirements

2.1. Antenna Requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Test Result: Compliant

Inside of the EUT has a PIFA antenna coupled with the metal shrapnel. Please refer to the EUT internal photos.

2.2. Duty Cycle of the Test Signal


2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be nonconstant.

2.2.2. Test Description

Test Setup:

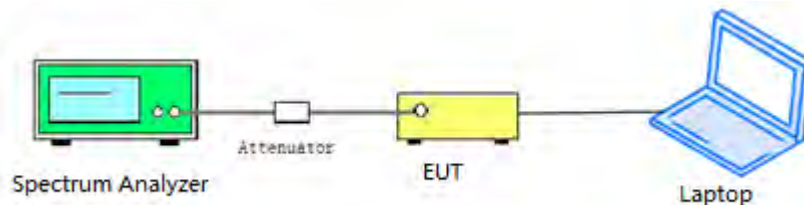

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.2.3. Test Procedure

KDB 789033 Section B was used in order to prove compliance.




2.2.4. Test Result


A. Test Verdict:

Test Mode	Duty Cycle (%) (D)	Duty Factor (10*log[1/D])
802.11a	99.06	0.04
802.11n(HT20)	99.63	0.02
802.11n(HT40)	99.63	0.02
802.11ac(VHT20)	99.63	0.02
802.11ac(VHT40)	99.63	0.02
802.11ac(VHT80)	99.63	0.02
802.11ax(HEW20)	99.63	0.02
802.11ax(HEW20) RU26	99.61	0.02
802.11ax(HEW40)	99.63	0.02
802.11ax(HEW80)	99.63	0.02


B. Test Plot:

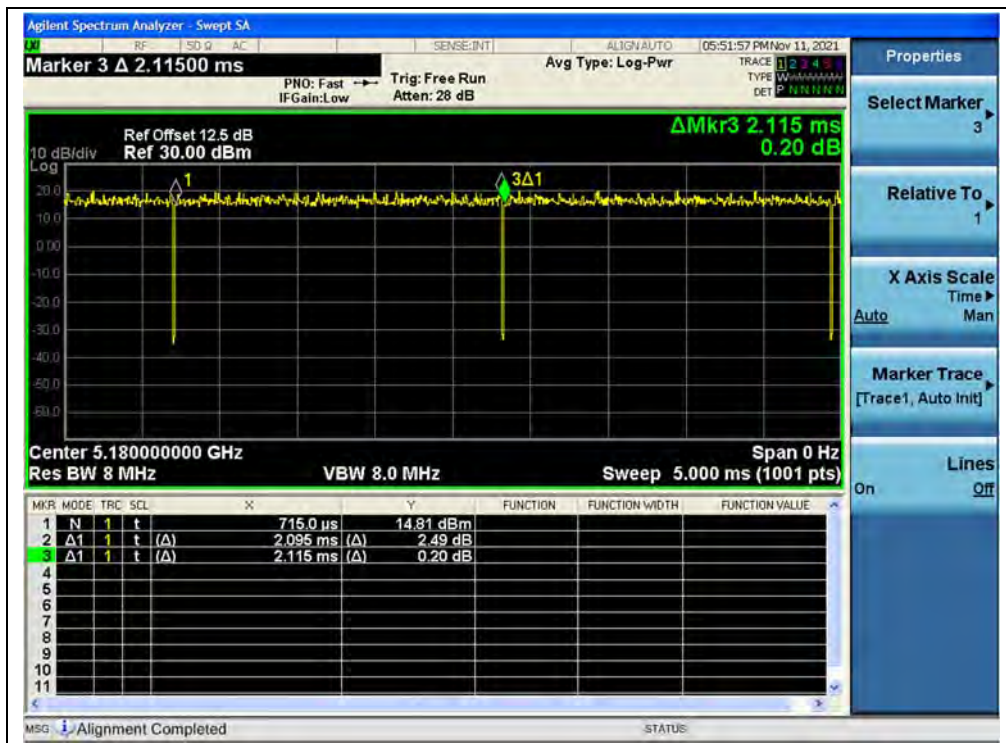


(Channel 36, 5180MHz, 802.11a)

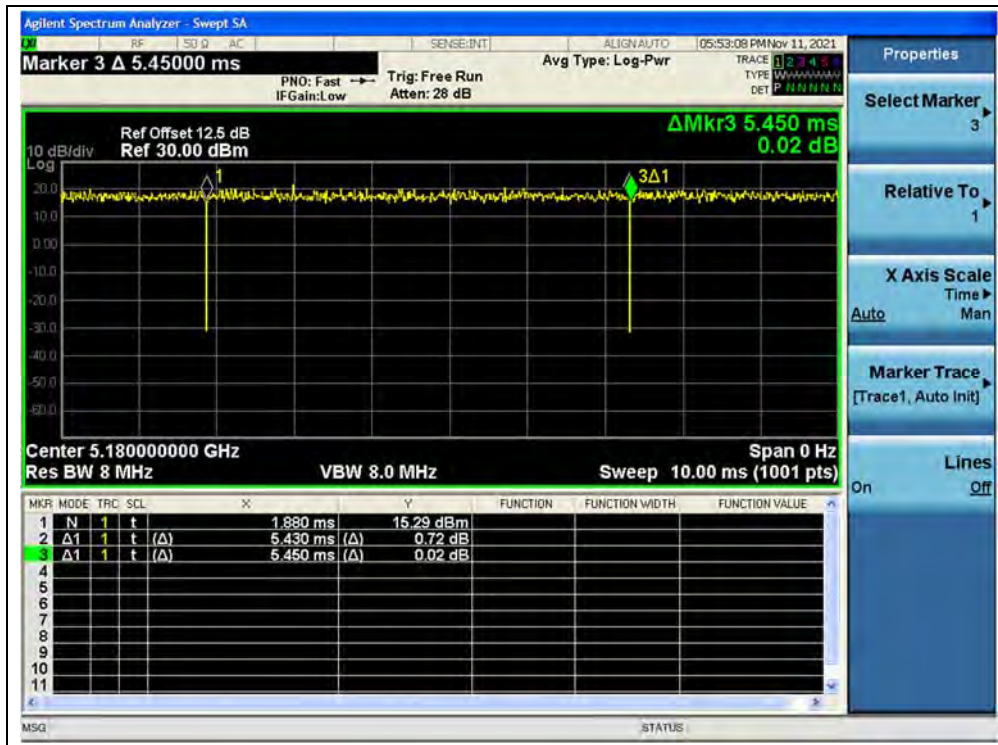


(Channel 36, 5180MHz, 802.11n (HT20))

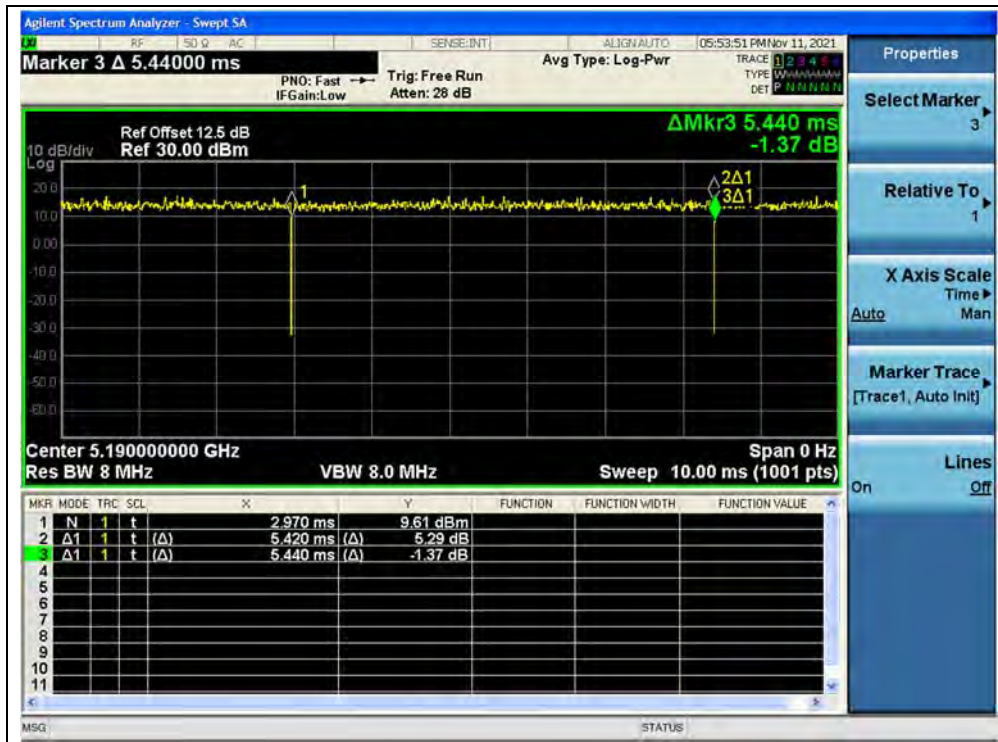


(Channel 38, 5190MHz, 802.11n (HT40))

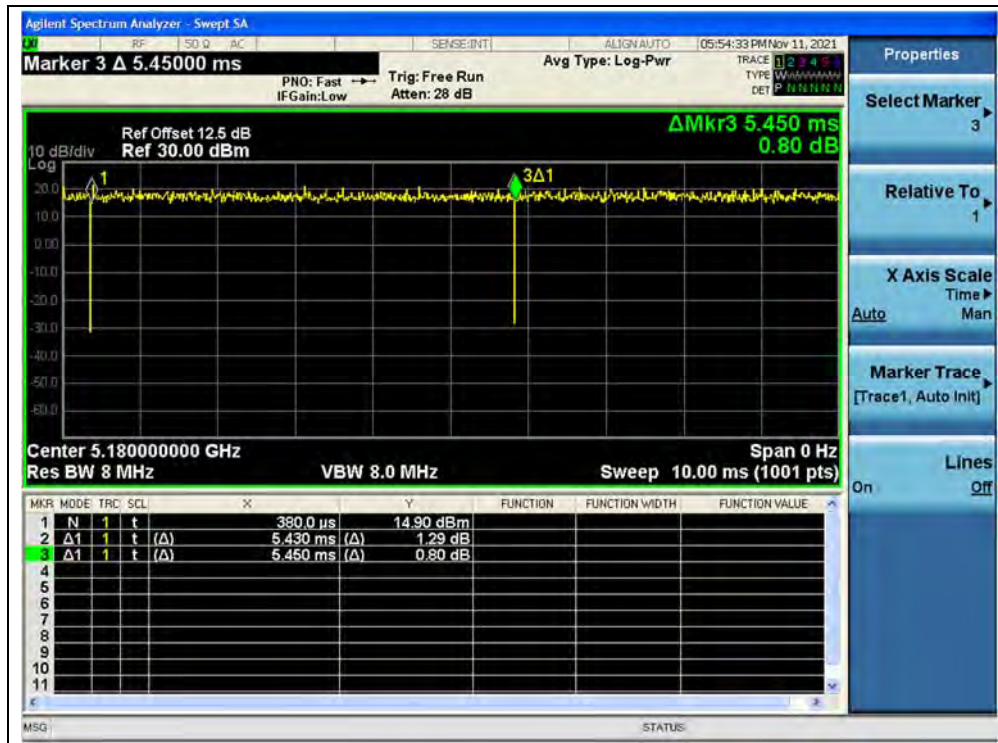


(Channel 36, 5180MHz, 802.11ac (VHT20))

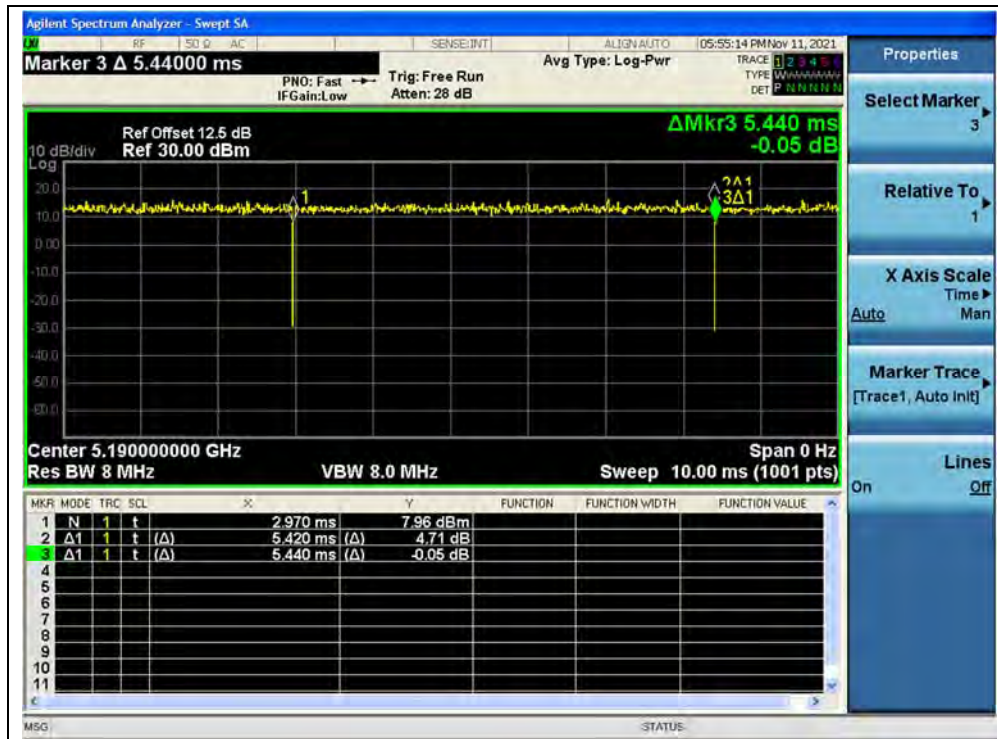


(Channel 38, 5190MHz, 802.11ac (VHT40))

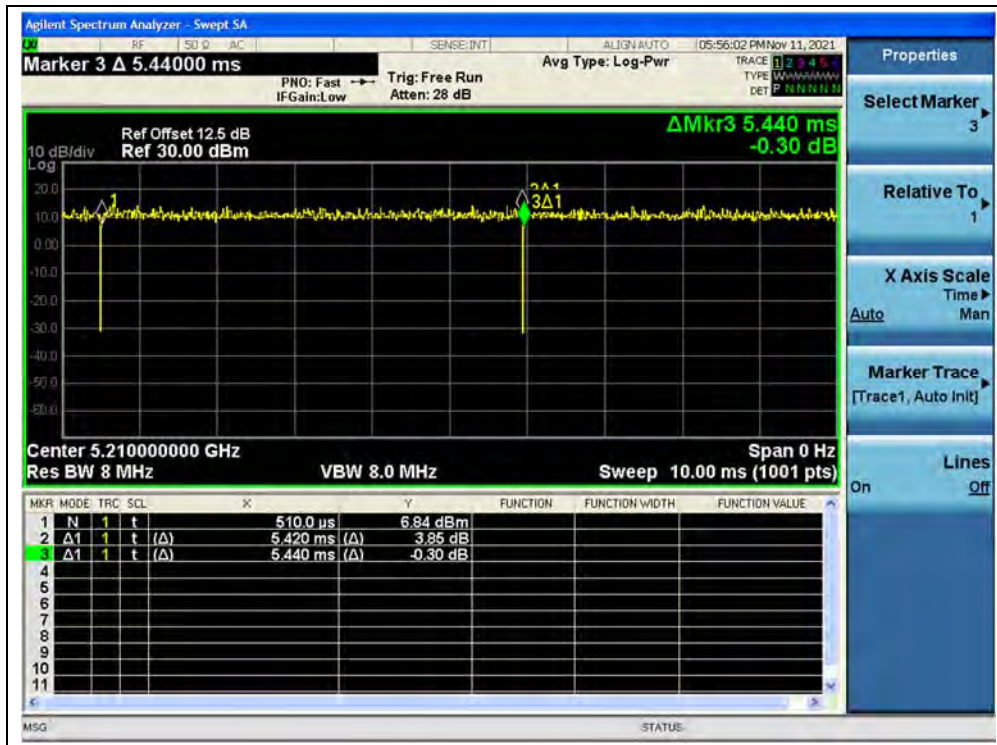


(Channel 42, 5210MHz, 802.11ac (VHT80))

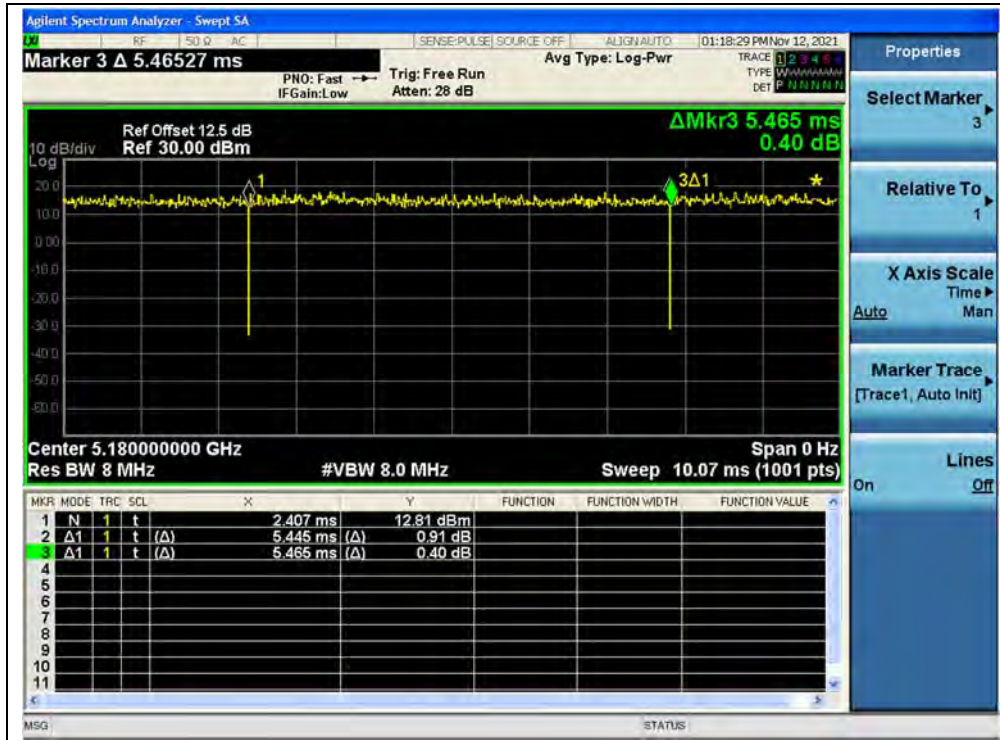


(CH36, 5180MHz, 802.11ax (HEW20))

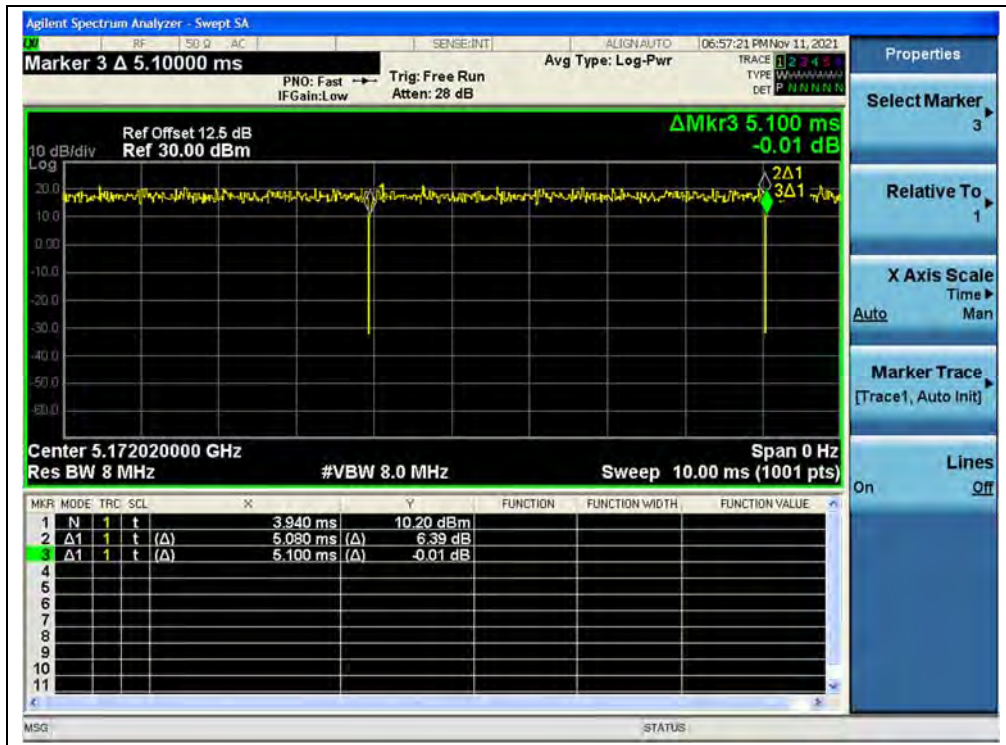

(CH36, 5180MHz, 802.11ax (HEW20) RU26)

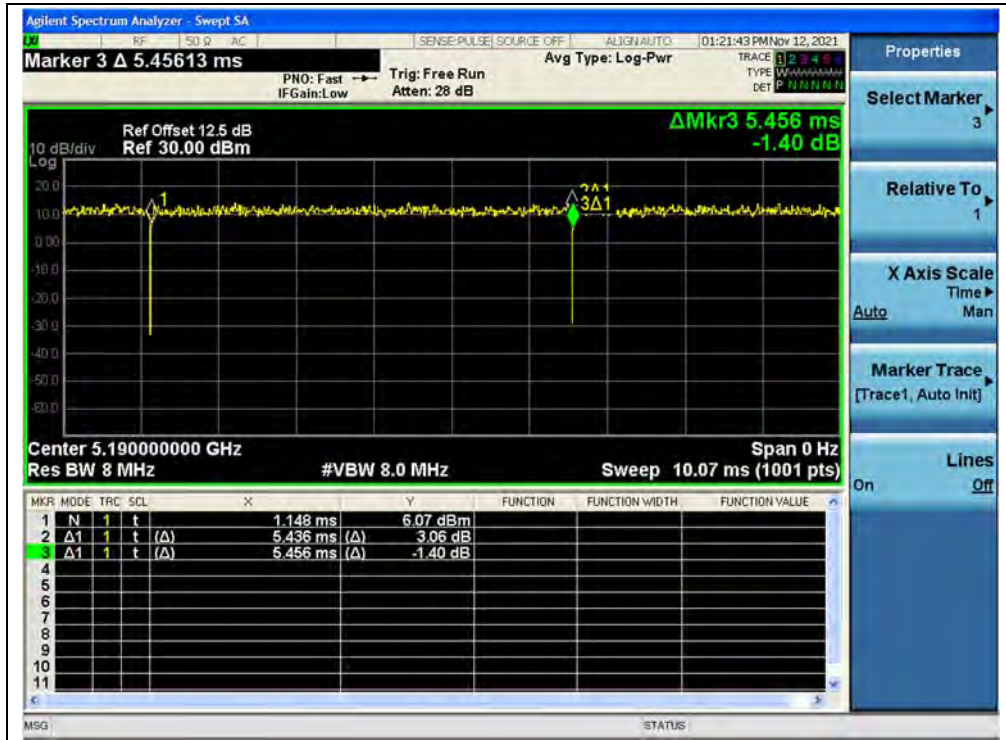

(CH38, 5190MHz, 802.11ax (HEW40))

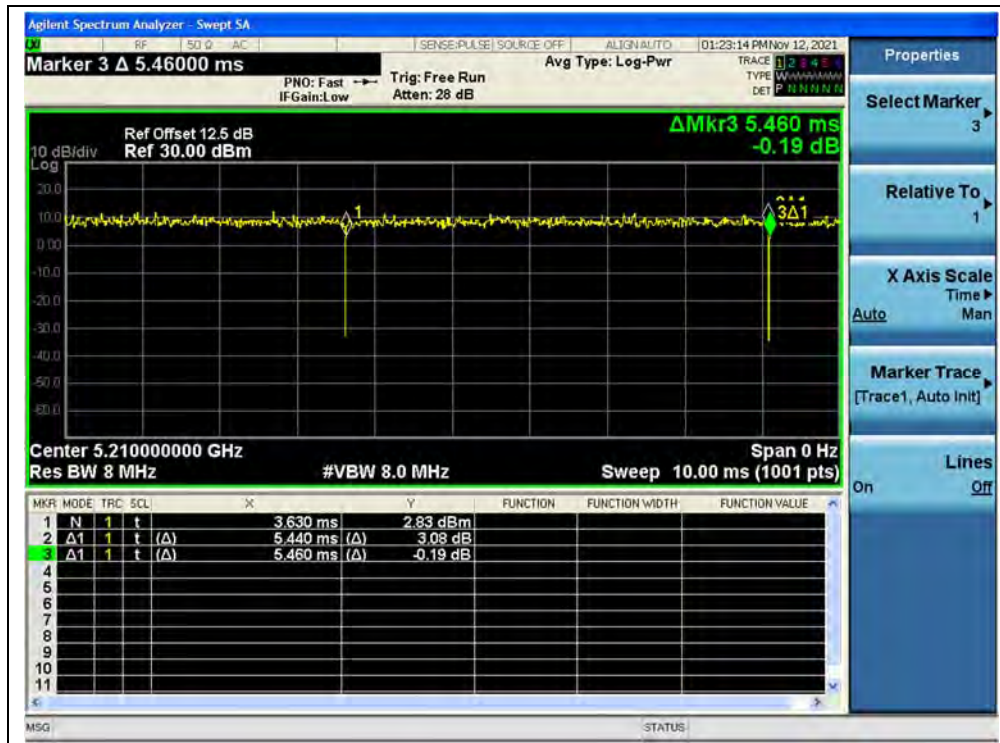

(CH42, 5210MHz, 802.11ax (HEW80))

2.3. Maximum Conducted Output Power

2.3.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{\text{ANT}} + 10\log(N_{\text{ANT}})\text{dBi}$, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

2.3.2. Test Description


Section E) 3) of KDB 789033 defines a methodology using a USB Wideband Power Sensor.

Test Setup:

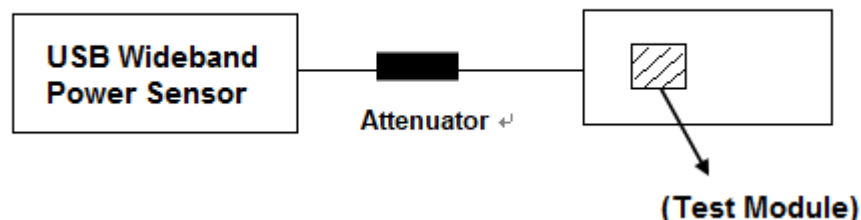

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in USB Wideband Power Sensor.

For ac (VHT80) mode power

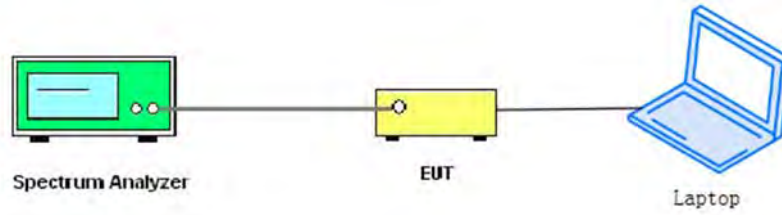

The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.



2.3.3. Limits

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz.

Mode	Band	Channel (MHz)	26dB BW (MHz)	10+10log(26dB BW)	Limits (dBm)
a	UNII-2a	5260	19.12	23.81	23.81
		5300	19.26	23.85	23.85
		5320	19.26	23.85	23.85
	UNII-2c	5500	19.34	23.86	23.86
		5600	19.40	23.88	23.88
		5720	19.26	23.85	23.85
n20	UNII-2a	5260	20.12	24.04	24.00
		5300	20.51	24.12	24.00
		5320	20.26	24.07	24.00
	UNII-2c	5500	20.70	24.16	24.00
		5600	20.52	24.12	24.00
		5720	20.58	24.13	24.00
ac20	UNII-2a	5260	20.34	24.08	24.00
		5300	20.05	24.02	24.00
		5320	19.48	23.90	23.90
	UNII-2c	5500	20.28	24.07	24.00
		5600	20.22	24.06	24.00
		5720	20.54	24.13	24.00
ax20	UNII-2a	5260	20.81	24.18	24.00
		5300	20.82	24.18	24.00
		5320	20.93	24.21	24.00
	UNII-2c	5500	20.88	24.20	24.00
		5600	20.70	24.16	24.00
		5720	20.89	24.20	24.00
ax_RU26	UNII-2a	5260	21.10	24.24	24.00
		5300	20.60	24.14	24.00
		5320	21.19	24.26	24.00
	UNII-2c	5500	21.28	24.28	24.00
		5600	21.16	24.26	24.00
		5720	21.15	24.25	24.00



2.3.4. Test Result

Maximum Average Conducted Output Power

802.11a Mode

Frequency (MHz)	Average Power						Limit		Verdict
	Measured		Duty Factor	Duty Factor Calculated					
	ANT0	ANT1		ANT0		ANT1			
	dBm	dBm		dBm	W	dBm	W	dBm	
5180	15.58	14.61	0.04	15.58	0.036	14.61	0.029	24	0.25
5220	15.97	15.37		15.97	0.040	15.37	0.034		
5240	15.36	14.63		15.36	0.034	14.63	0.029		
5260	14.64	15.04		14.64	0.029	15.04	0.032	23.81	0.24
5300	15.80	15.45		15.80	0.038	15.45	0.035	23.85	0.24
5320	14.71	15.09		14.71	0.030	15.09	0.032	23.85	0.24
5500	14.23	16.14		14.23	0.026	16.14	0.041	23.86	0.24
5600	15.68	16.64		15.68	0.037	16.64	0.046	23.88	0.24
5720	15.39	16.15		15.39	0.035	16.15	0.041	23.85	0.24
5745	15.42	16.10		15.42	0.035	16.10	0.041	30	1
5785	15.44	15.89		15.44	0.035	15.89	0.039		
5825	14.89	15.76		14.89	0.031	15.76	0.038		



802.11n (HT20) Mode

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor		dBm		W
	ANT0	ANT1		dBm	W			
5180	15.58	14.48	0.02	18.06	0.064	24	0.25	PASS
5220	15.81	15.28		18.57	0.072			
5240	15.26	14.54		17.92	0.062			
5260	14.58	14.94		17.78	0.060			
5300	15.71	15.05		18.45	0.070			
5320	14.62	15.02		17.85	0.061			
5500	14.22	16.03		18.26	0.067			
5600	15.65	16.38		19.08	0.081			
5720	15.47	16.27		18.92	0.078			
5745	15.42	16.11		18.81	0.076			
5785	15.22	15.97		18.63	0.073			
5825	14.98	15.86		18.45	0.070			

Note: Directional gain = 0.50dBi + 10log(2) = 3.51dBi < 6dBi, so the power limit shall be 24dBm for 5.18-5.24GHz and 30dBm for 5.745-5.825GHz band.

802.11n (HT40) Mode

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor		dBm		W
	ANT0	ANT1		dBm	W			
5190	13.66	13.64	0.02	16.72	0.047	24	0.25	PASS
5230	13.91	13.69		16.81	0.048			
5270	13.84	13.84		16.90	0.049			
5310	14.75	13.62		17.24	0.053			
5510	13.66	14.44		17.08	0.051			
5630	15.39	14.97		18.20	0.066			
5710	15.40	15.01		18.26	0.067			
5755	15.32	14.88		18.13	0.065	30	1	
5795	15.13	14.86		17.99	0.063			

Note: Directional gain = 0.50dBi + 10log(2) = 3.51dBi < 6dBi, so the power limit shall be 24dBm for 5.18-5.24GHz, 5.260-5.320GHz, 5.500-5.720GHz band and 30dBm for 5.745-5.825GHz band.



802.11ac (VHT20) Mode

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor		dBm		W
	ANT0	ANT1		dBm	W			
5180	13.90	12.52	0.02	16.33	0.043	24	0.25	PASS
5220	13.61	12.39		16.02	0.040			
5240	13.74	13.16		16.53	0.045			
5260	13.69	12.82		16.33	0.043			
5300	13.75	12.81		16.33	0.043			
5320	13.94	13.19		16.63	0.046			
5500	12.18	13.94		16.13	0.041			
5600	13.42	13.97		16.72	0.047			
5720	13.93	13.74		16.90	0.049			
5745	13.88	13.65		16.81	0.048			
5785	13.84	13.68		16.81	0.048			
5825	13.75	13.52		16.63	0.046			

Note: Directional gain = $0.50\text{dBi} + 10\log(2) = 3.51\text{dBi} < 6\text{dBi}$, so the power limit shall be 24dBm for 5.18-5.24GHz band and 30dBm for 5.745-5.825GHz band.

802.11ac (VHT40) Mode

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor		dBm		W
	ANT0	ANT1		dBm	W			
5190	12.08	12.04	0.02	15.05	0.032	24	0.25	PASS
5230	12.31	12.75		15.56	0.036			
5270	12.04	12.56		15.31	0.034			
5310	12.72	12.81		15.80	0.038			
5510	12.11	13.82		16.13	0.041			
5630	13.27	13.98		16.63	0.046			
5710	13.28	13.97		16.63	0.046			
5755	13.21	13.92		16.63	0.046			
5795	13.19	13.85		16.53	0.045			

Note: Directional gain = $-0.50\text{dBi} + 10\log(2) = 3.51\text{dBi} < 6\text{dBi}$, so the power limit shall be 24dBm for 5.18-5.24GHz, 5.260-5.320GHz, 5.500-5.720GHz band and 30dBm for 5.745-5.825GHz band.



802.11ac (VHT80) Mode

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1		W	dBm	dBm		W
5210	12.79	12.25	0.02	15.56	0.036	24	0.25	PASS
5290	12.73	12.13		15.44	0.035			
5530	12.06	13.31		15.80	0.038			
5610	13.51	13.47		16.53	0.045			
5690	13.44	13.54		16.53	0.045			
5775	13.36	13.45		16.43	0.044	30	1	

Note: Directional gain = 0.50dBi + 10log(2) = 3.51dBi < 6dBi, so the power limit shall be 24dBm for 5.18-5.24GHz, 5.260-5.320GHz, 5.500-5.720GHz band and 30dBm for 5.745-5.825GHz band.

802.11ax (HEW20) Mode

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1		dBm	W	dBm		W
5180	13.89	12.56	0.02	16.33	0.043	24	0.25	PASS
5220	13.64	12.47		16.13	0.041			
5240	13.65	13.23		16.43	0.044			
5260	13.72	12.82		16.33	0.043			
5300	13.63	13.09		16.43	0.044			
5320	13.97	13.13		16.63	0.046			
5500	12.17	13.95		16.23	0.042			
5600	13.88	13.92		16.90	0.049			
5720	13.90	13.86		16.90	0.049			
5745	13.88	13.84		16.90	0.049			
5785	13.79	13.91		16.90	0.049			
5825	13.75	13.82		16.81	0.048			

Note: Directional gain = 0.50dBi + 10log(2) = 3.51dBi < 6dBi, so the power limit shall be 24dBm for 5.18-5.24 GHz band and 30dBm for 5.745-5.825 GHz band.



802.11ax (HEW20) RU26 Mode

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor		dBm		W
	ANT0	ANT1		dBm	W			
5180	8.86	11.86	0.02	13.62	0.023	24	0.25	PASS
5220	9.08	12.28		13.98	0.025			
5240	9.37	12.36		14.15	0.026			
5260	9.62	12.60		14.31	0.027			
5300	9.50	12.49		14.31	0.027			
5320	9.74	12.84		14.62	0.029			
5500	9.84	12.69		14.47	0.028			
5600	9.77	12.52		14.31	0.027			
5720	9.48	12.47		14.31	0.027			
5745	9.42	12.51		14.31	0.027			
5785	9.56	12.58		14.31	0.027			
5825	9.64	12.62		14.47	0.028			

Note: Directional gain = 0.50dBi +10log(2) =3.51dBi < 6dBi, so the power limit shall be 24dBm for 5.18-5.24GHz, 5.260-5.320GHz, 5.500-5.720GHz band and 30dBm for 5.745-5.825GHz band.

802.11ax (HEW40) Mode

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor		dBm		W
	ANT0	ANT1		dBm	W			
5190	12.59	12.05	0.02	15.31	0.034	24	0.25	PASS
5230	12.84	12.03		15.44	0.035			
5270	12.97	13.12		16.13	0.041			
5310	13.75	13.33		16.53	0.045			
5510	12.21	13.37		15.91	0.039			
5630	13.22	13.64		16.43	0.044			
5710	13.31	13.69		16.53	0.045			
5755	13.23	13.56		16.43	0.044	30	1	
5795	13.19	13.54		16.43	0.044			

Note: Directional gain = 0.50dBi +10log(2) =3.51dBi < 6dBi, so the power limit shall be 24dBm for 5.18-5.24GHz, 5.260-5.320GHz, 5.500-5.720GHz band and 30dBm for 5.745-5.825GHz band.



802.11ax (HEW80) Mode

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1		W	dBm	dBm		W
	dBm	dBm						
5210	12.94	12.32	0.02	15.68	0.037	24	0.25	PASS
5290	12.82	13.28		16.13	0.041			
5530	12.17	12.11		15.19	0.033			
5610	13.53	13.43		16.53	0.045			
5690	13.46	13.59		16.53	0.045			
5775	13.41	13.52		16.53	0.045	30	1	

Note: Directional gain = $-3.5\text{dBi} + 10\log(2) = -0.49\text{dBi} < 6\text{dBi}$, so the power limit shall be 24dBm for 5.18-5.24GHz, 5.260-5.320GHz, 5.500-5.720GHz band and 30dBm for 5.745-5.825GHz band.


2.4. Emission Bandwidth

2.4.1. Requirement

For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement. Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

2.4.2. Test Description

Test Setup:

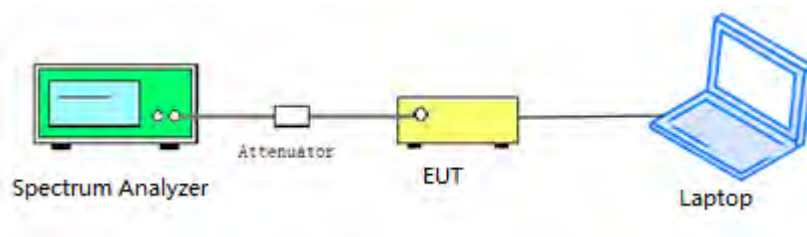

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

2.4.3. Test Procedure

1. KDB 789033 Section C) 1) Emission Bandwidth was used in order to prove compliance
 - a) Set RBW = approximately 1% of the emission bandwidth.
 - b) Set VBW > RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
2. KDB 789033 Section C) 2) minimum emission bandwidth for the band 5.725-5.85GHz was used in order to prove compliance.
Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:



- a) Set RBW = 100 kHz.
- b) Set video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

2.4.4. Test Result

802.11a Mode

A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	19.48
44	5220	19.19
48	5240	19.14
52	5260	19.12
60	5300	19.26
64	5320	19.26
100	5500	19.34
120	5600	19.40
144	5720	19.26
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
144	5720	16.35
149	5745	16.41
157	5785	16.36
165	5825	16.40



B.Test Plot:




(Channel 36, 5180MHz, 802.11a)




(Channel 44, 5220 MHz, 802.11a)



(Channel 48, 5240MHz, 802.11a)

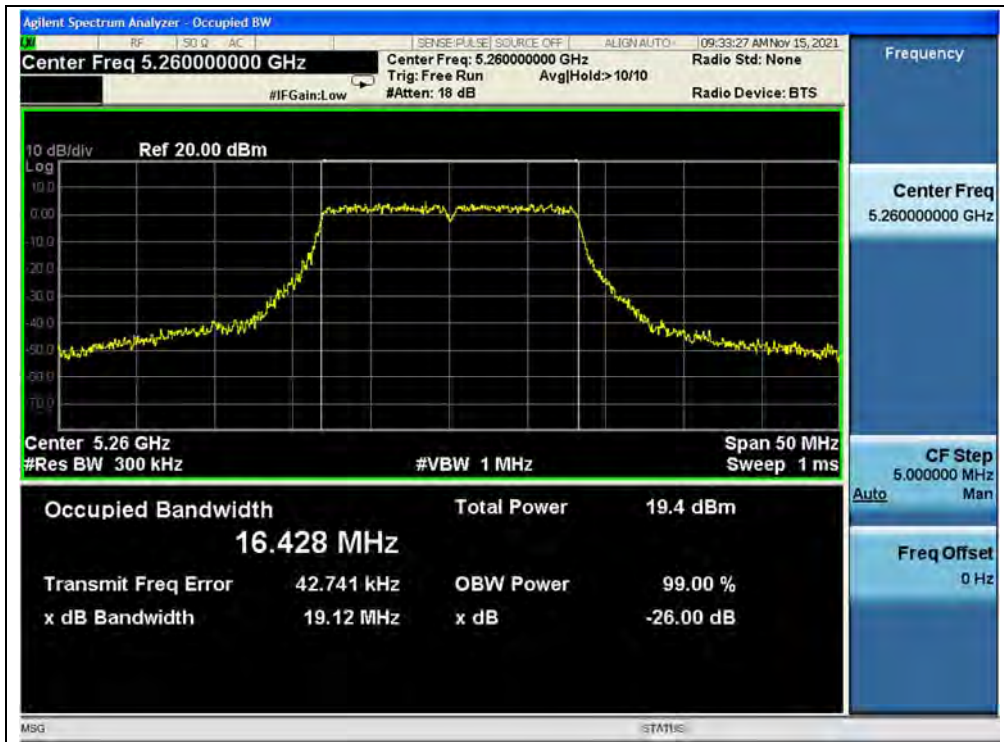

(Channel 52, 5260MHz, 802.11a)

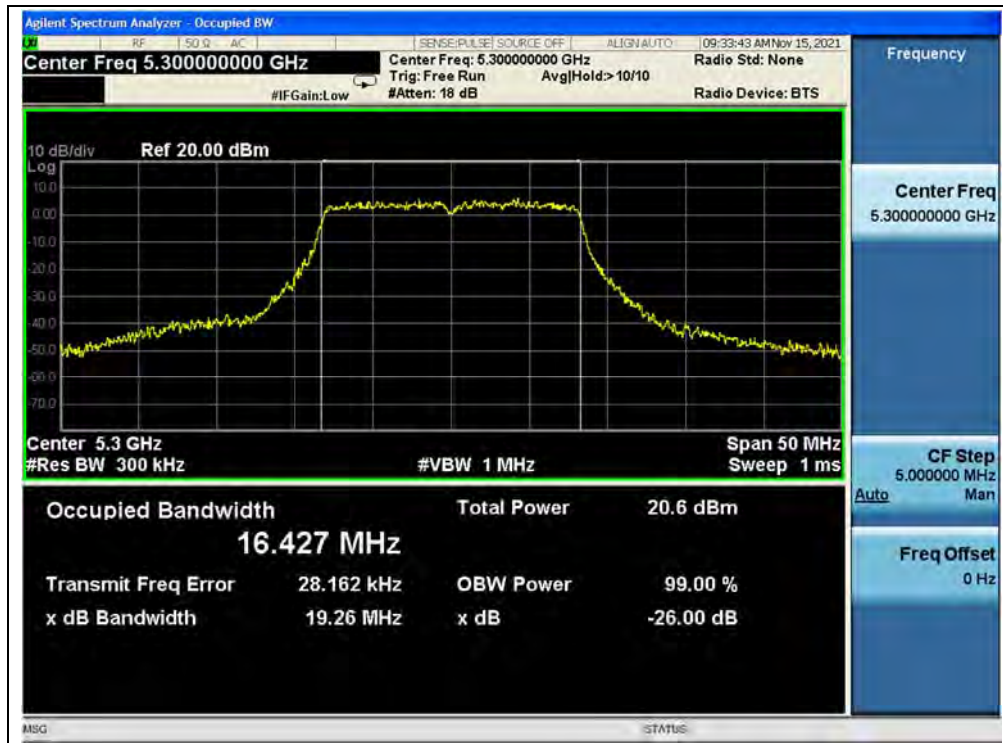


(Channel 60, 5300 MHz, 802.11a)




(Channel 64, 5320MHz, 802.11a)



(Channel 100,5500MHz, 802.11a)

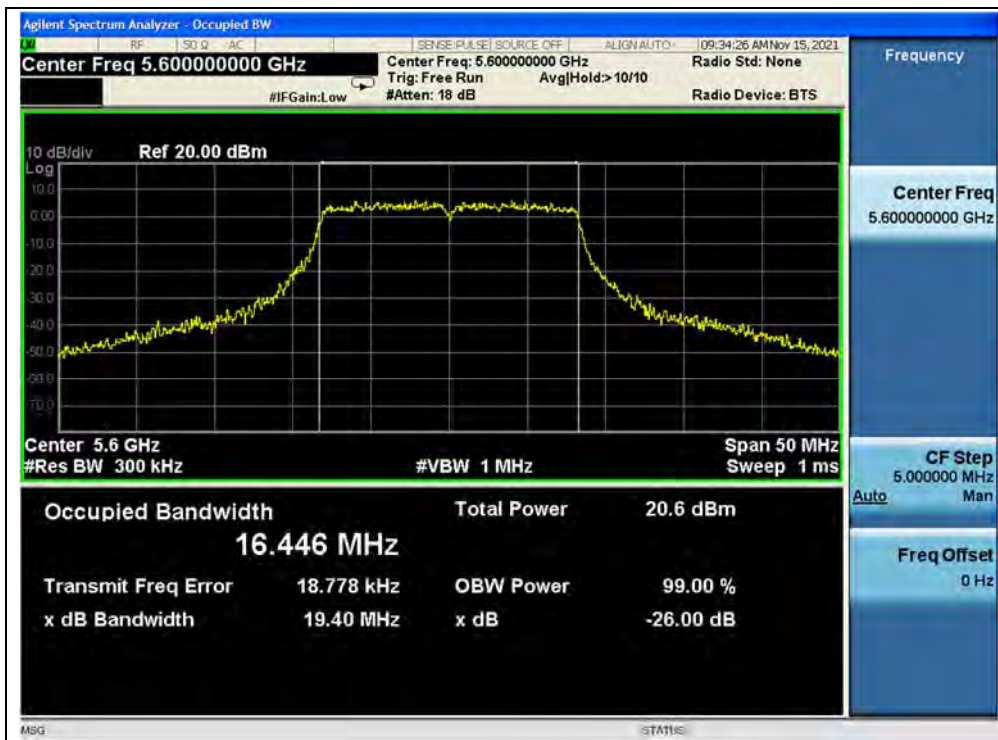


(Channel 120, 5600 MHz, 802.11a)

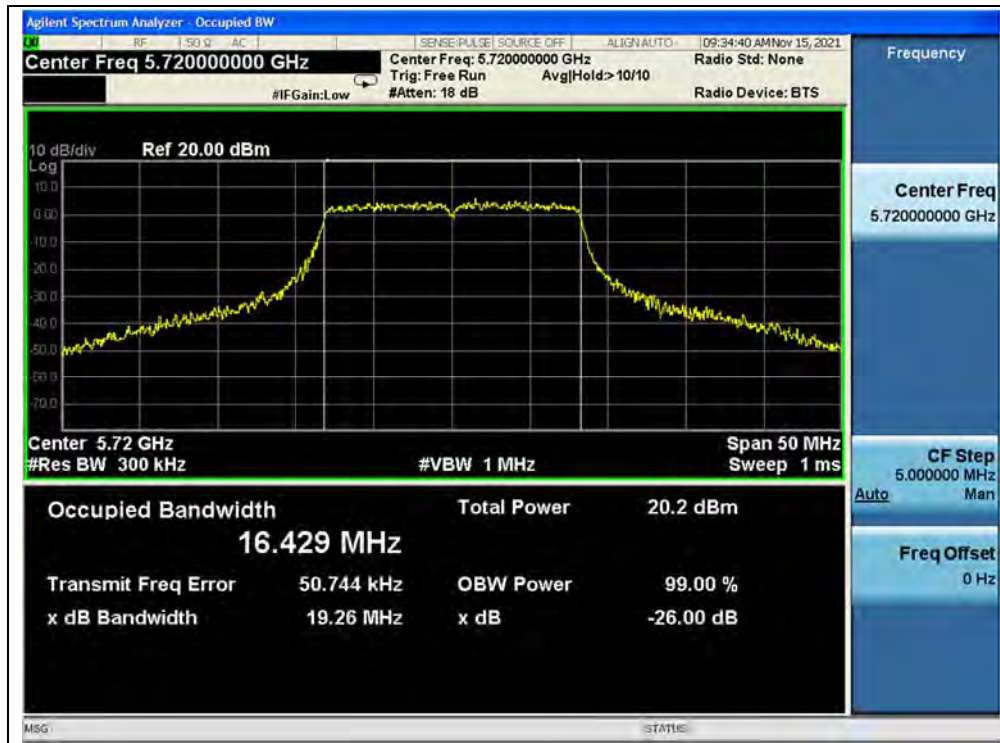


(Channel 144, 5720MHz, 802.11a)




(Channel 144, 5720MHz, 802.11a)

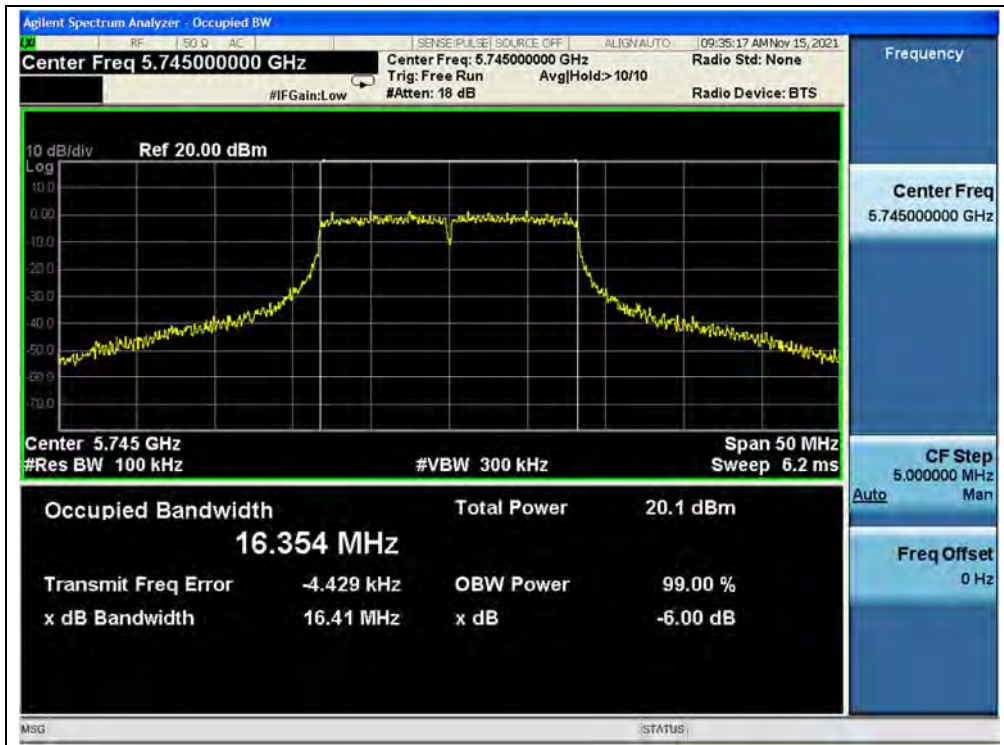

(Channel 149,5745MHz, 802.11a)

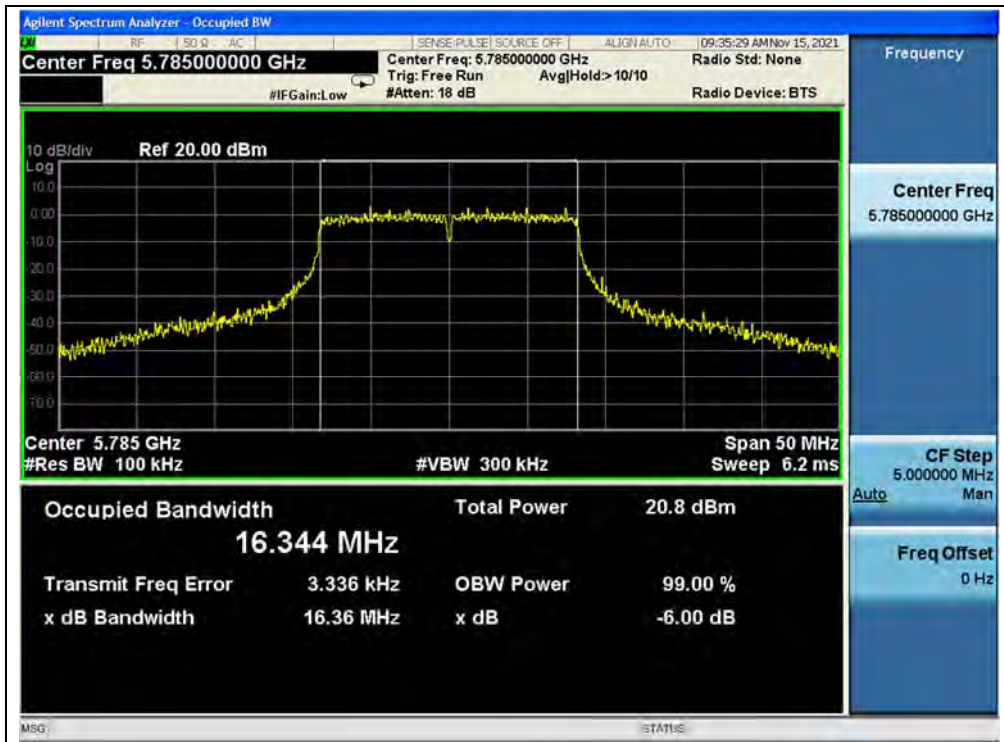

(Channel 157,5785MHz, 802.11a)

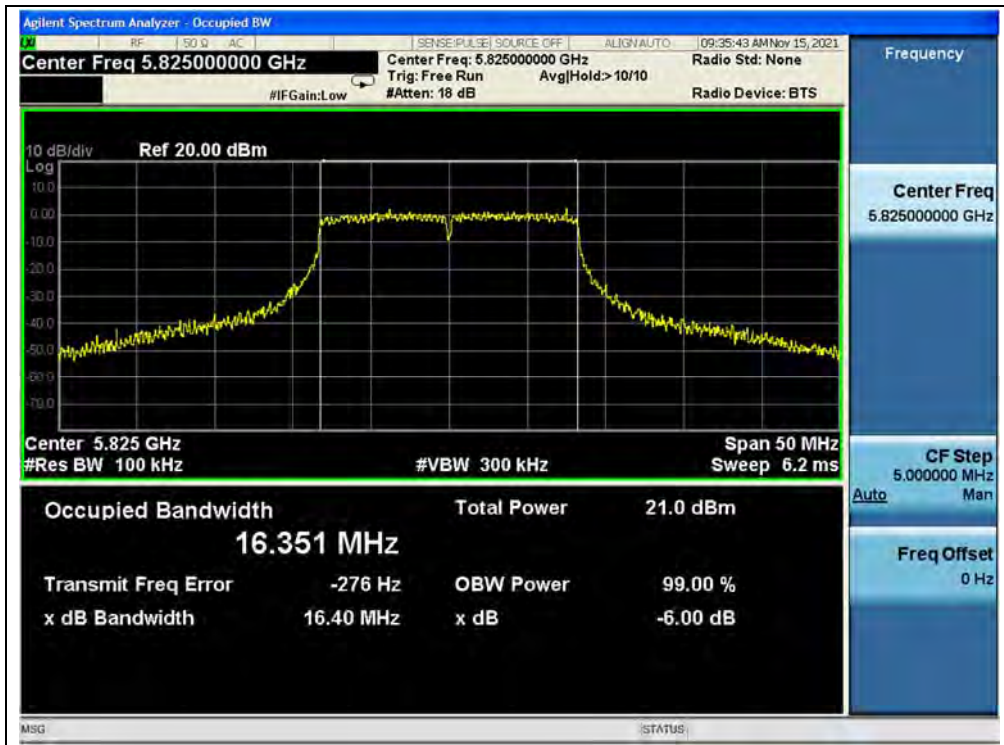

(Channel 165, 5825MHz, 802.11a)



802.11n (HT20) Mode


A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	20.51
44	5220	20.25
48	5240	20.35
52	5260	20.12
60	5300	20.51
64	5320	20.26
100	5500	20.70
120	5600	20.52
144	5720	20.58
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
144	5720	17.57
149	5745	17.61
157	5785	17.58
165	5825	17.55

B. Test Plot:




(Channel 36, 5180MHz, 802.11n (HT20))

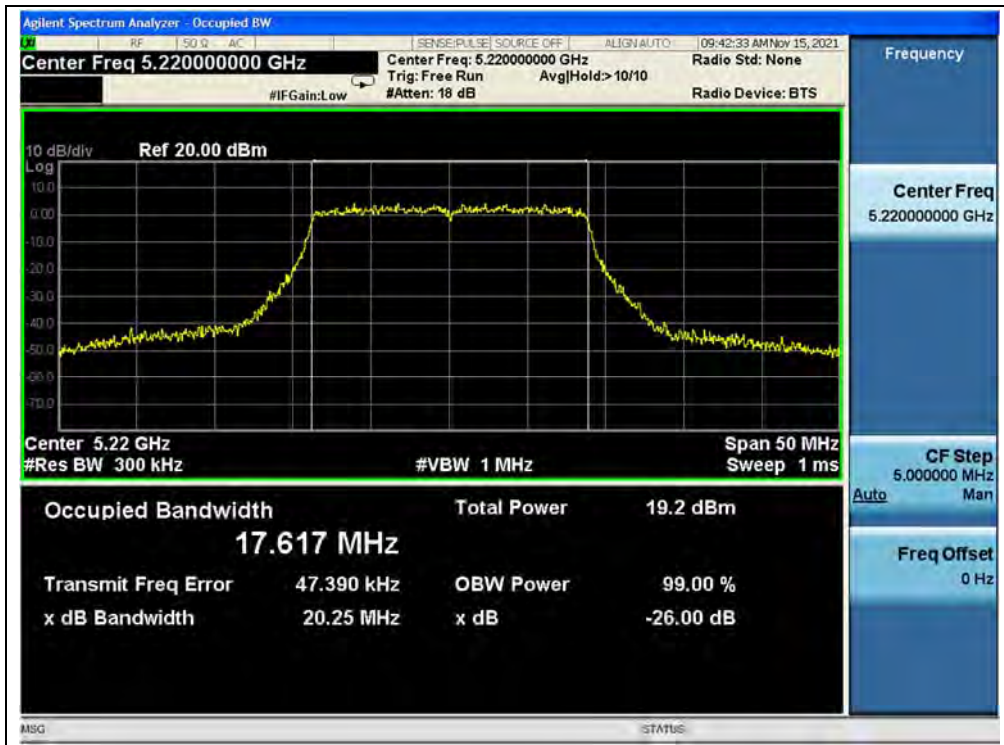

(Channel 44, 5220MHz, 802.11n (HT20))




(Channel 48, 5240MHz, 802.11n (HT20))

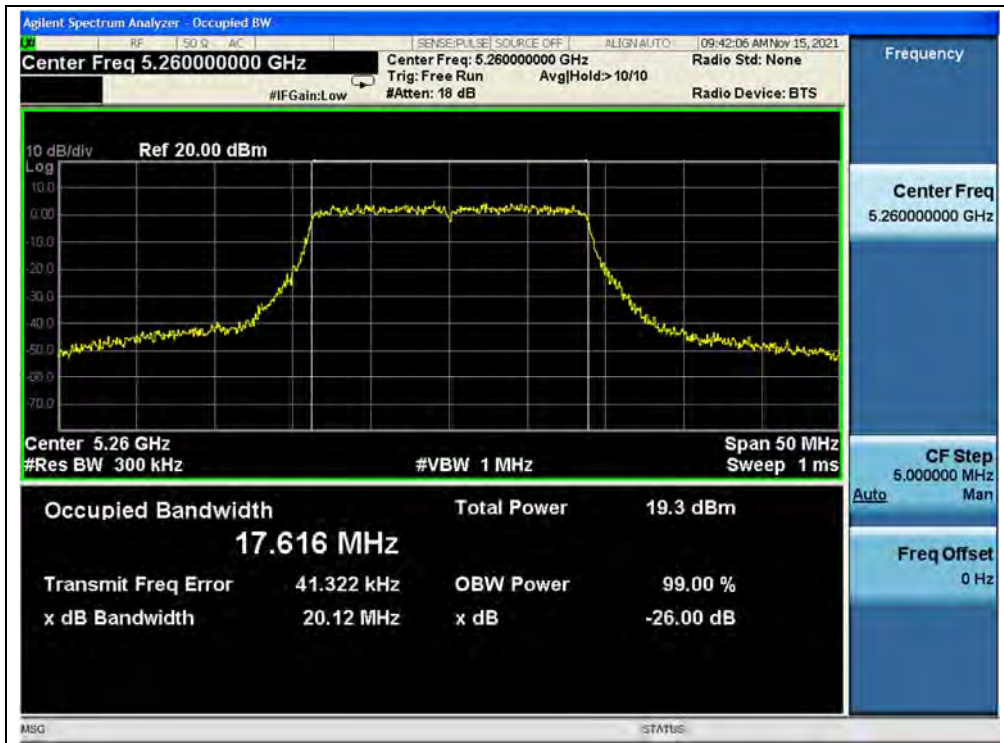


(Channel 52, 5260MHz, 802.11n (HT20))



(Channel 60, 5300MHz, 802.11n (HT20))

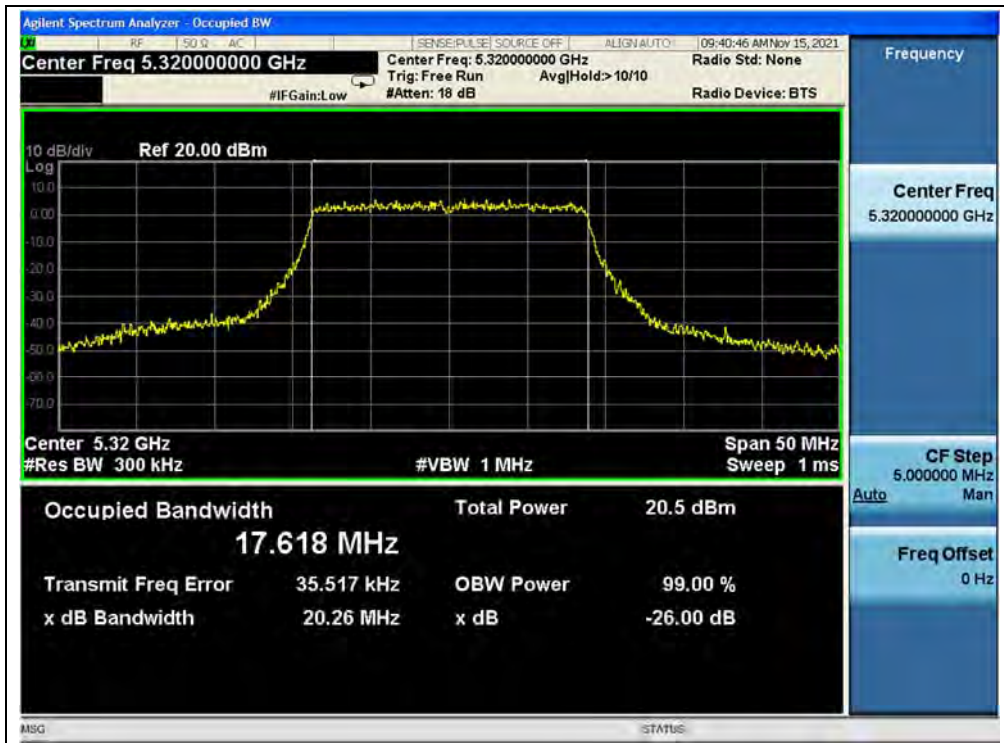


(Channel 64, 5320MHz, 802.11n (HT20))

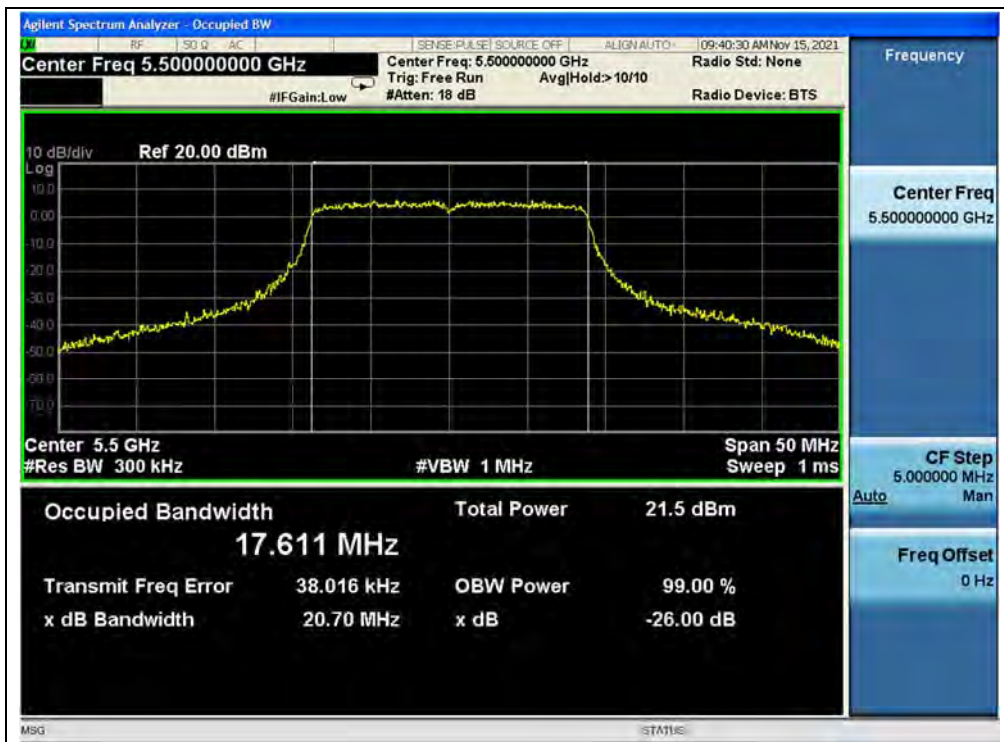

(Channel 100, 5500MHz, 802.11n (HT20))




(Channel 120, 5600MHz, 802.11n (HT20))

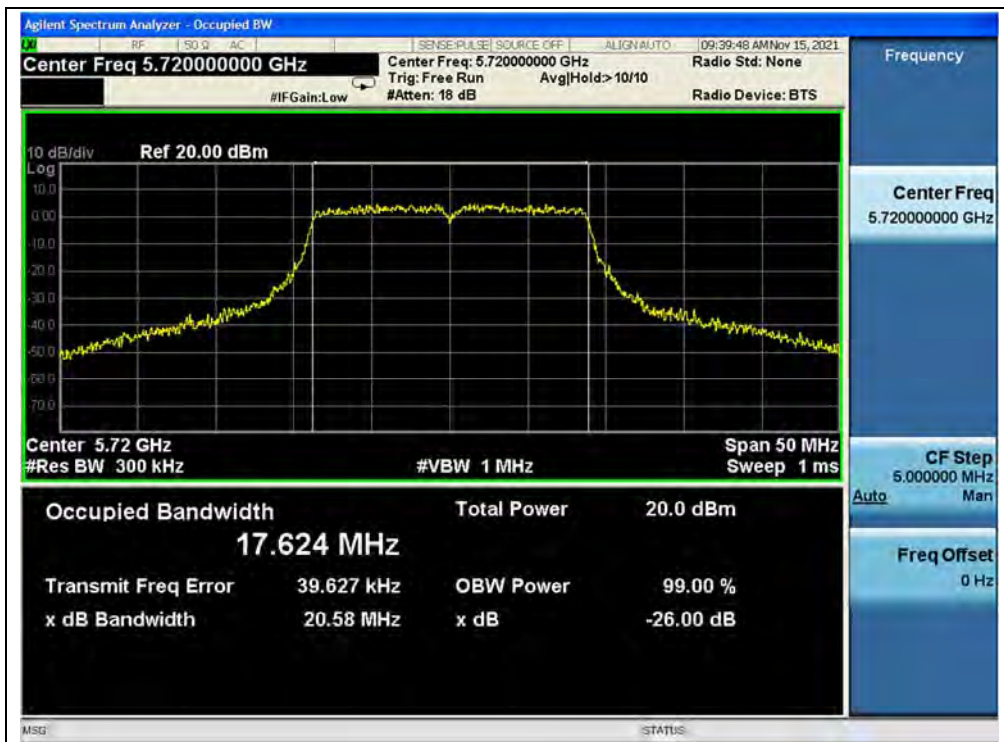


(Channel 144, 5720MHz, 802.11n (HT20))



(Channel 144, 5720MHz, 802.11 n (HT20))

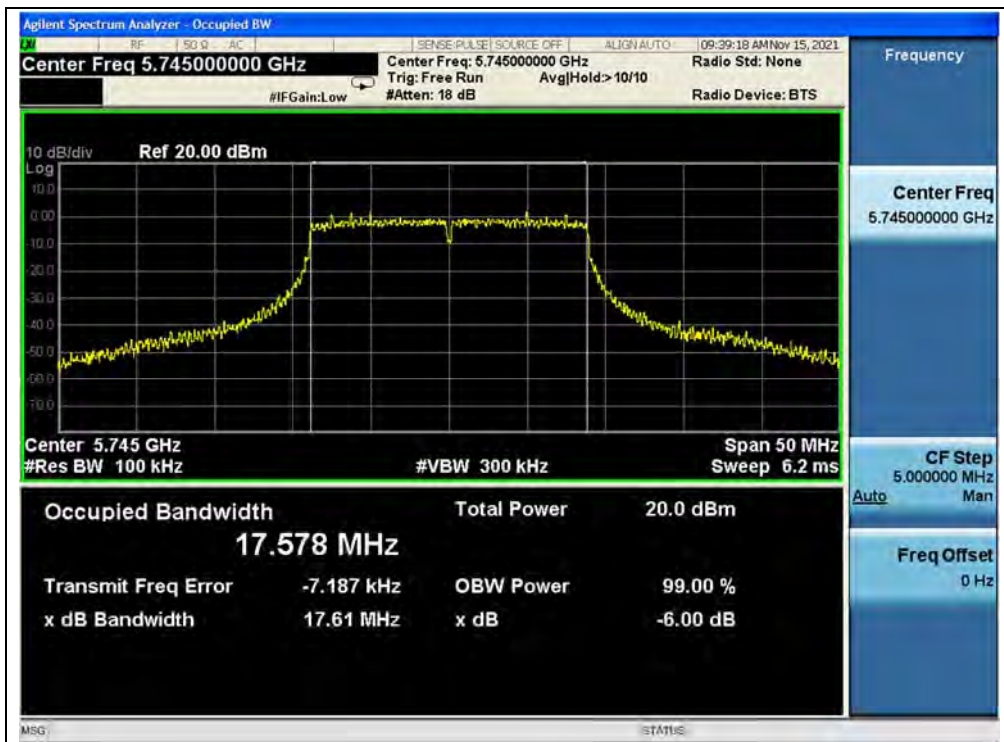

(Channel 149, 5745MHz, 802.11 n (HT20))

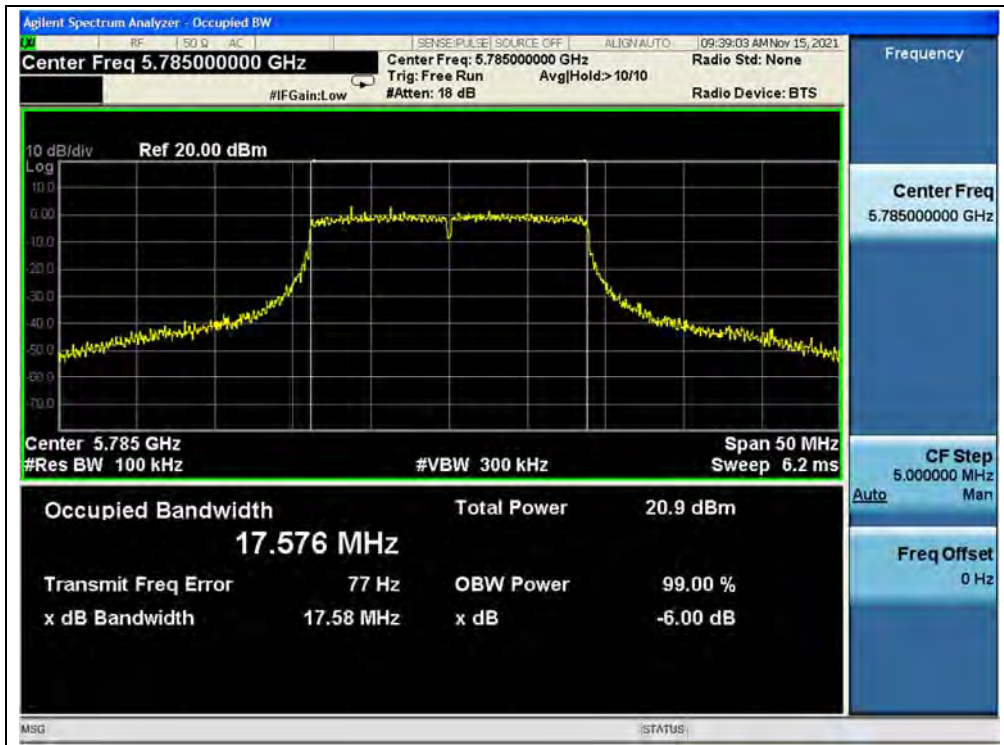

(Channel 157, 5785MHz, 802.11 n (HT20))



(Channel 165, 5825MHz, 802.11 n (HT20))




802.11n (HT40) Test mode


A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
38	5190	39.99
46	5230	39.34
54	5270	39.04
62	5310	39.12
102	5510	39.52
126	5630	39.52
142	5710	39.68
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
142	5710	36.40
151	5755	36.47
159	5795	36.48


B. Test Plot:

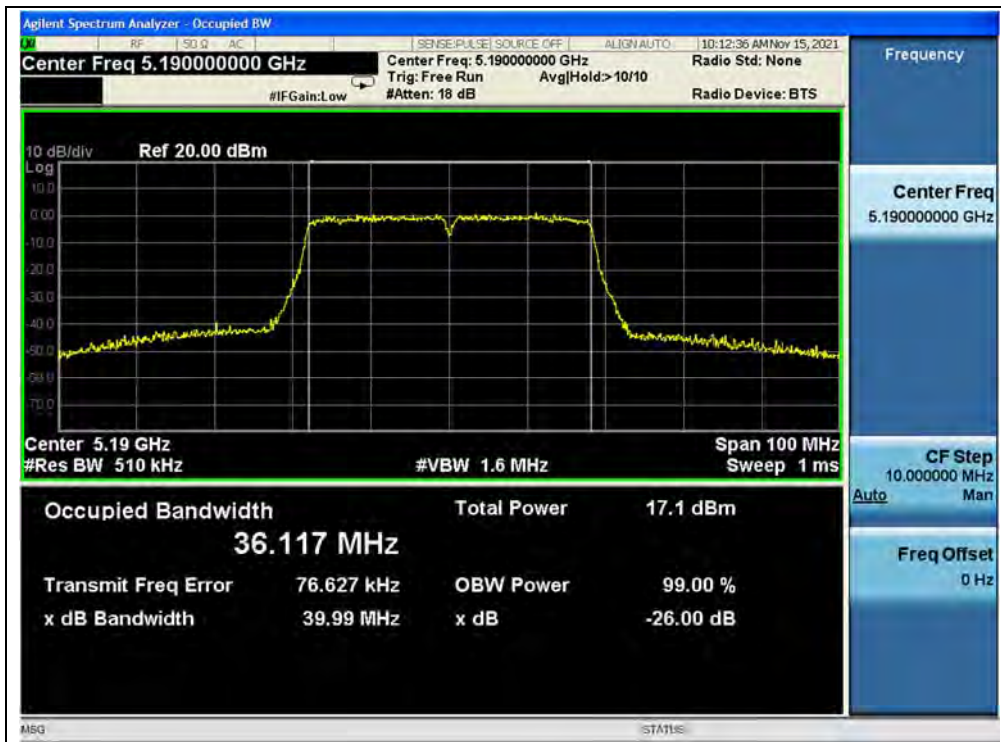

(Channel 38, 5190MHz, 802.11n (HT40))

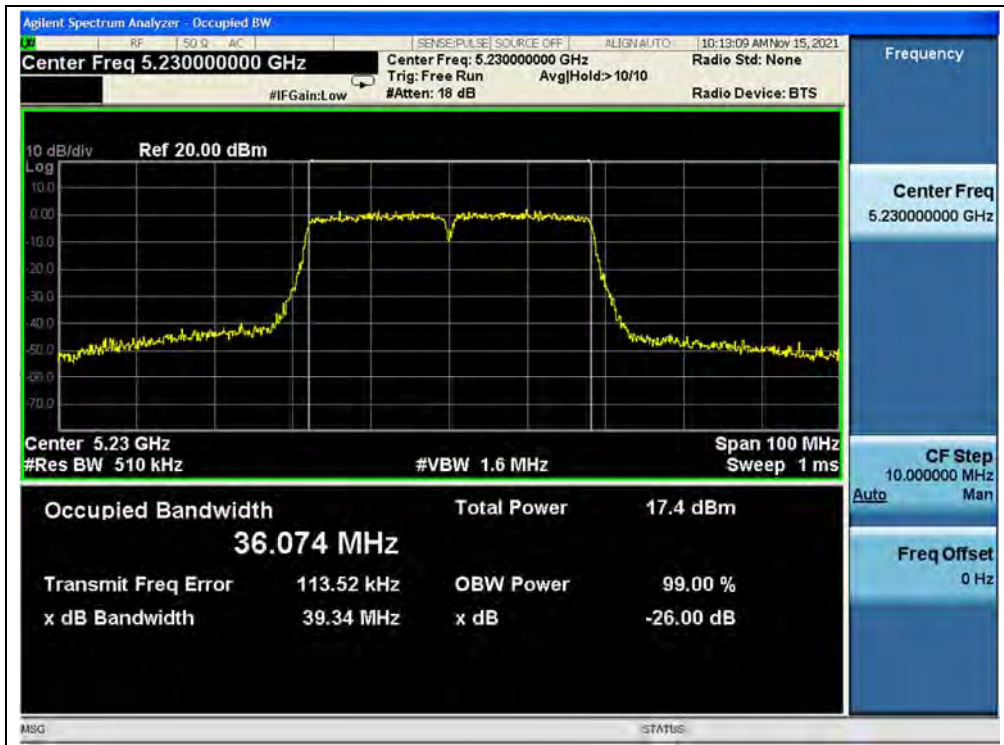


(Channel 46, 5230MHz, 802.11n (HT40))

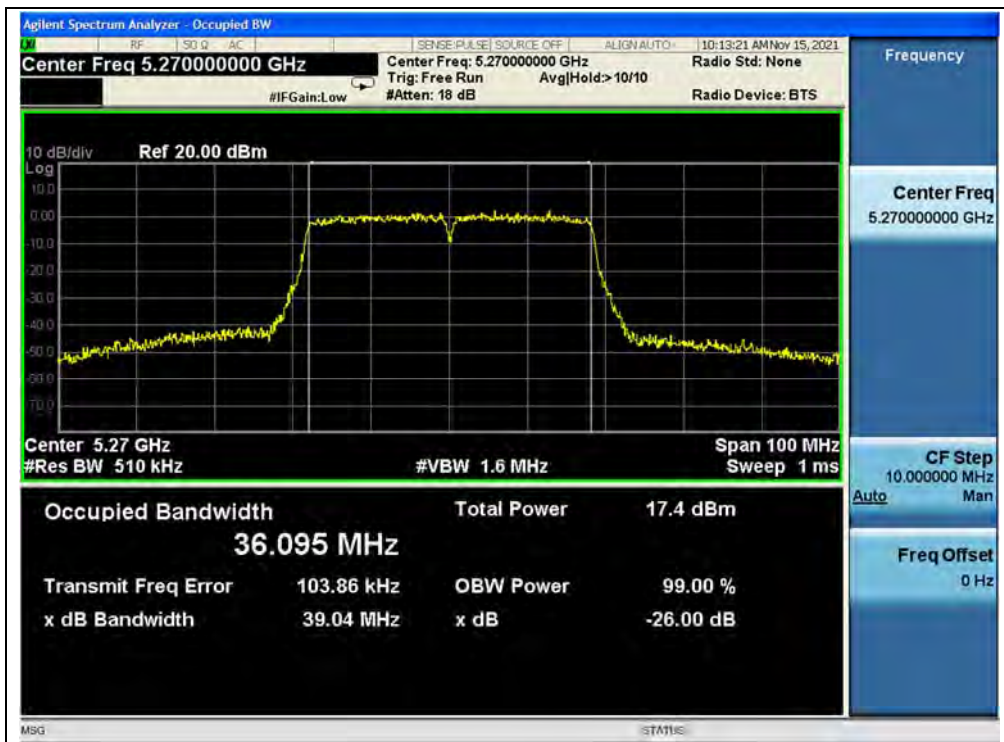


(Channel 54, 5270MHz, 802.11n (HT40))




(Channel 62, 5310MHz, 802.11n (HT40))

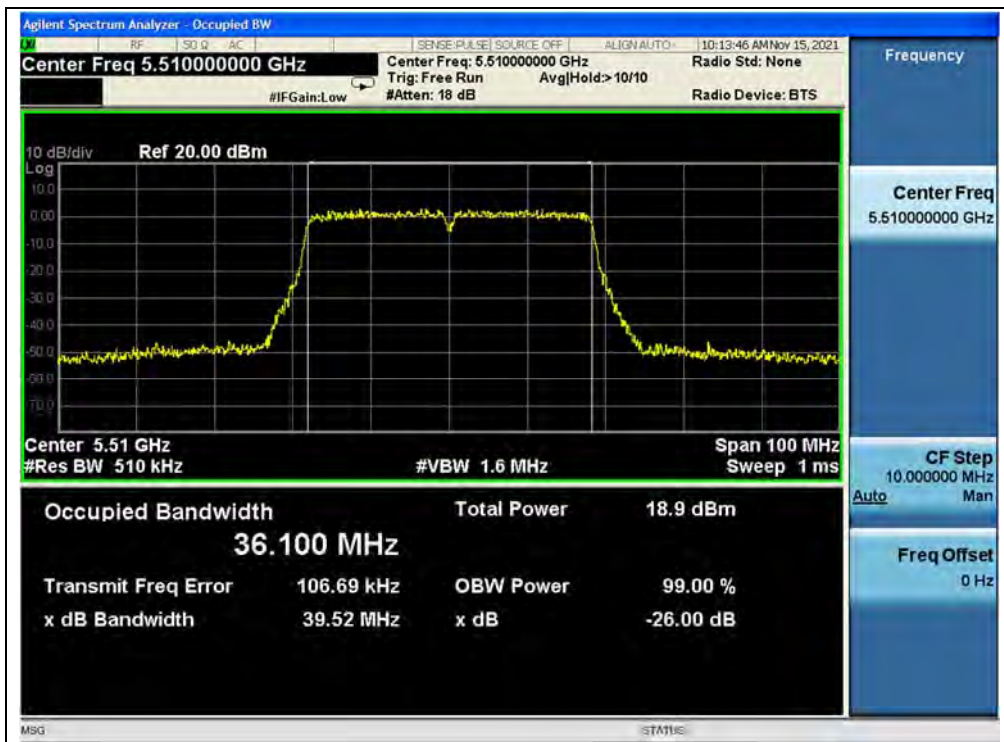


(Channel 102, 5510MHz, 802.11n (HT40))

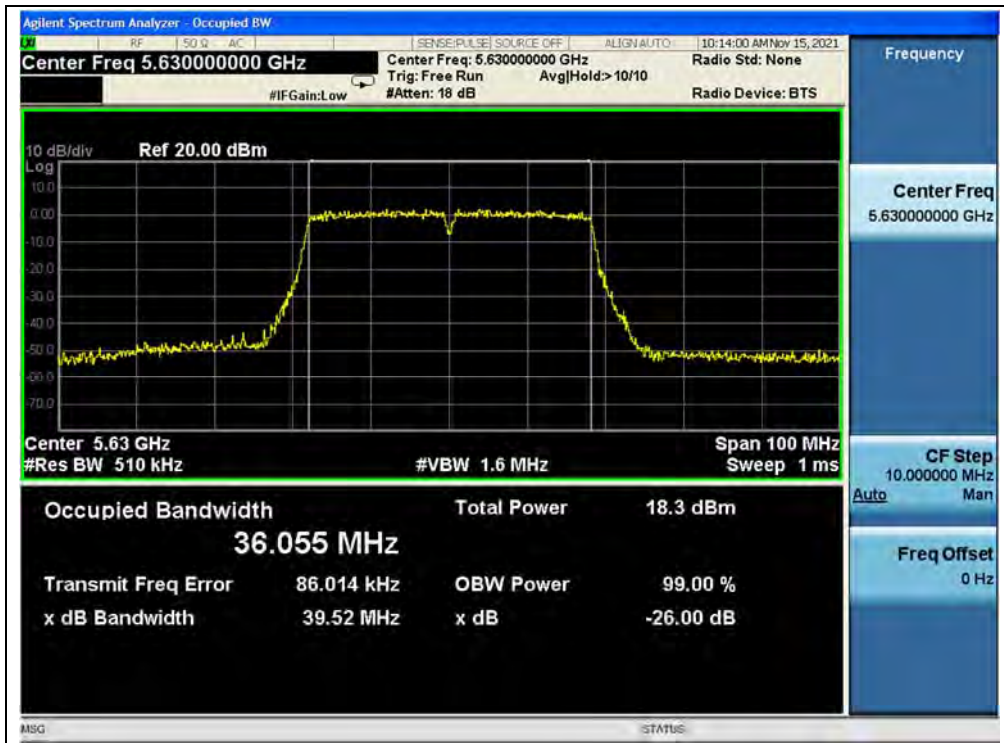


(Channel 126, 5630MHz, 802.11n (HT40))

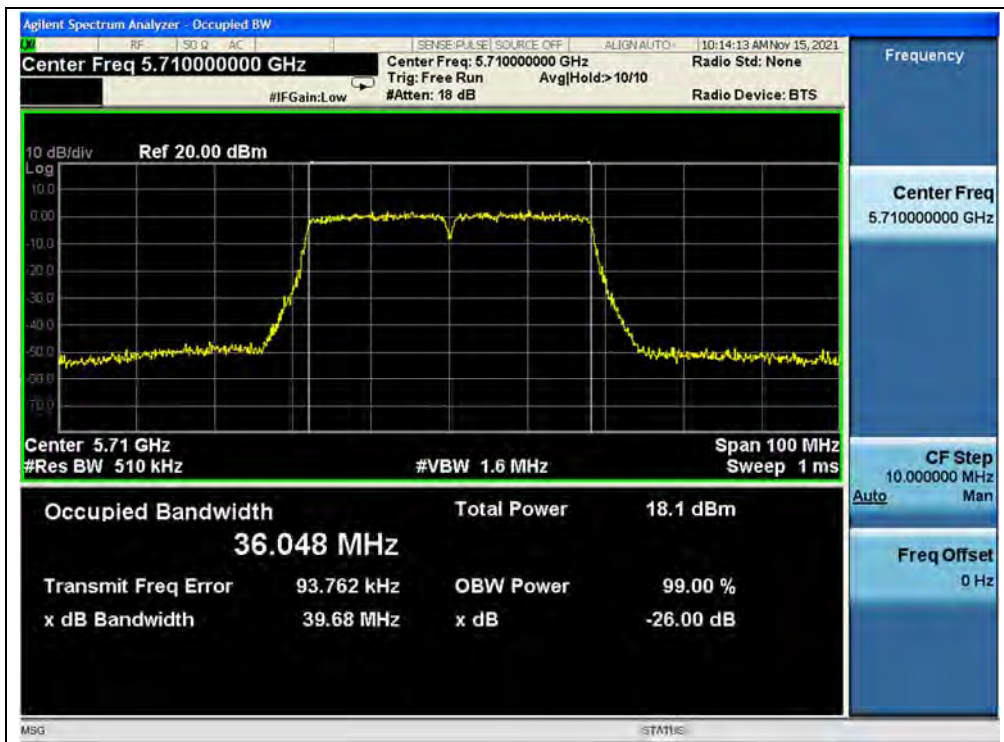


(Channel 142, 5710MHz, 802.11n (HT40))

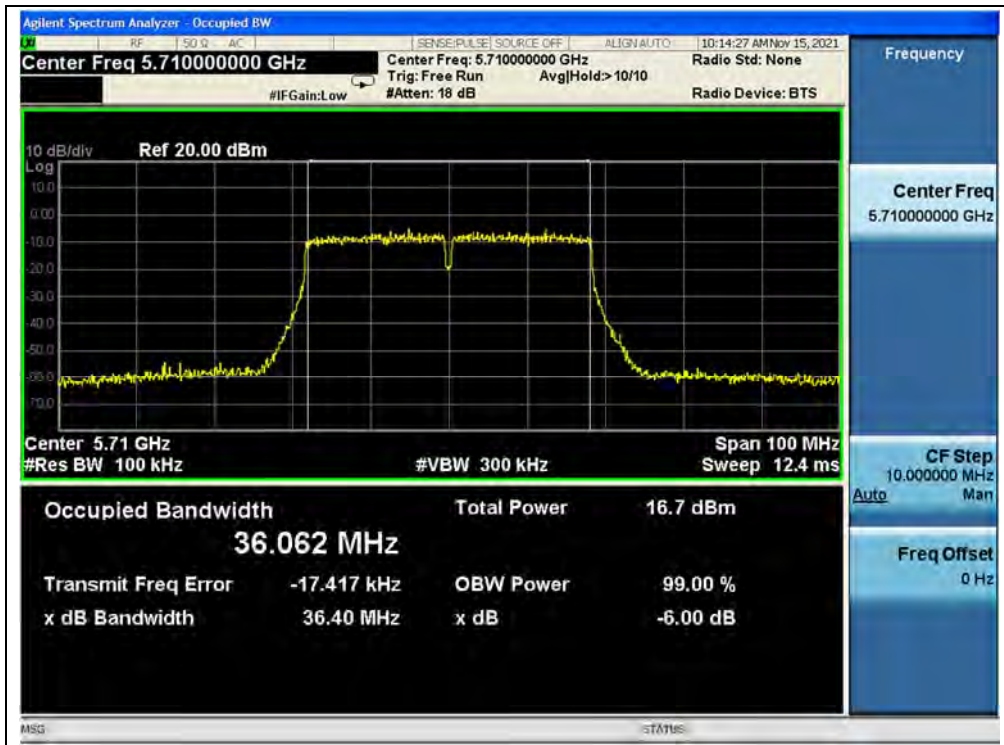

(Channel 142, 5710MHz, 802.11n (HT40))

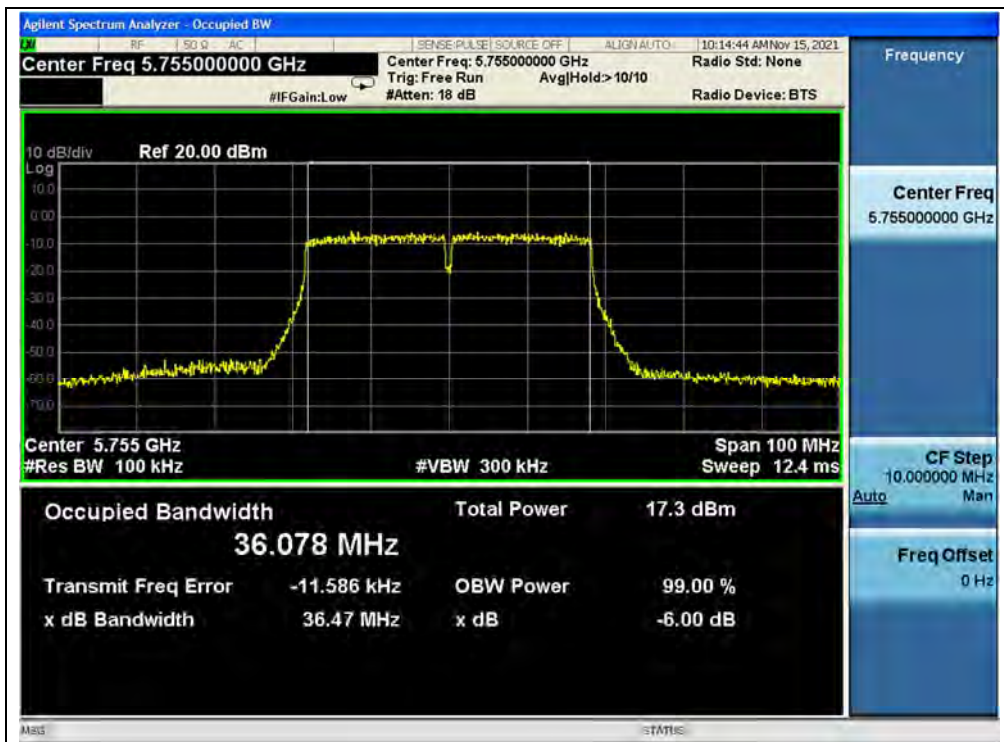

(Channel 151, 5755MHz, 802.11n (HT40))

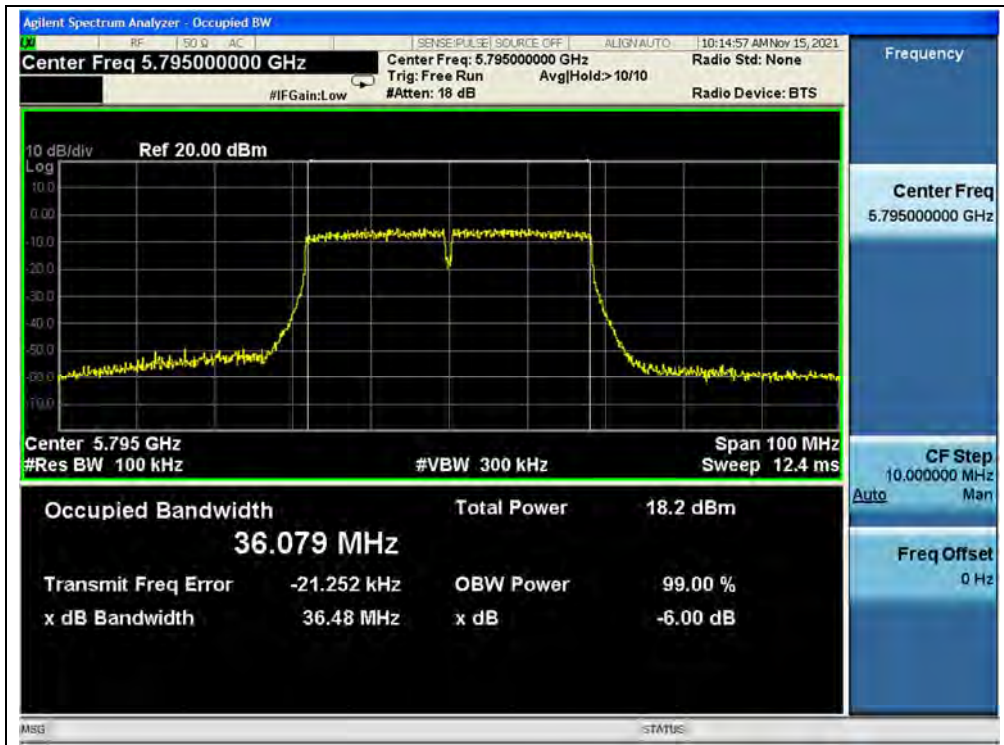

(Channel 159, 5795MHz, 802.11n (HT40))




802.11ac (VHT20) Mode


A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	20.44
44	5220	20.35
48	5240	20.31
52	5260	20.34
60	5300	20.05
64	5320	19.48
100	5500	20.28
120	5600	20.22
144	5720	20.54
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
144	5720	17.57
149	5745	17.60
157	5785	17.57
165	5825	17.62

B. Test Plot:

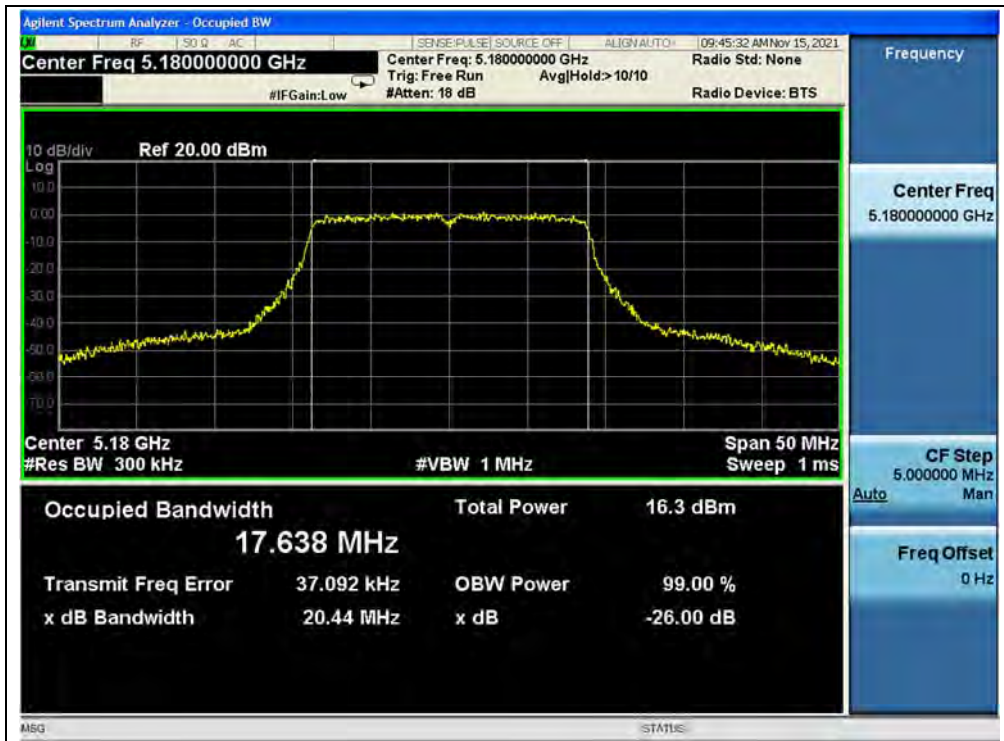


(Channel 36, 5180MHz, 802.11ac (VHT20))

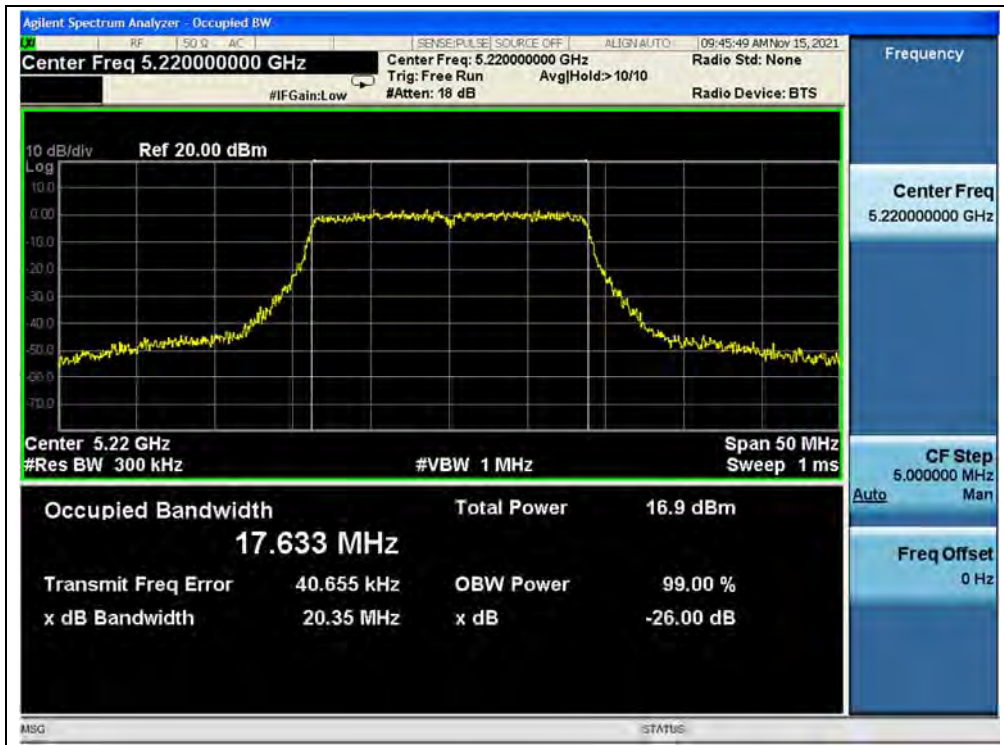


(Channel 44, 5220MHz, 802.11ac (VHT20))




(Channel 48, 5240MHz, 802.11ac (VHT20))

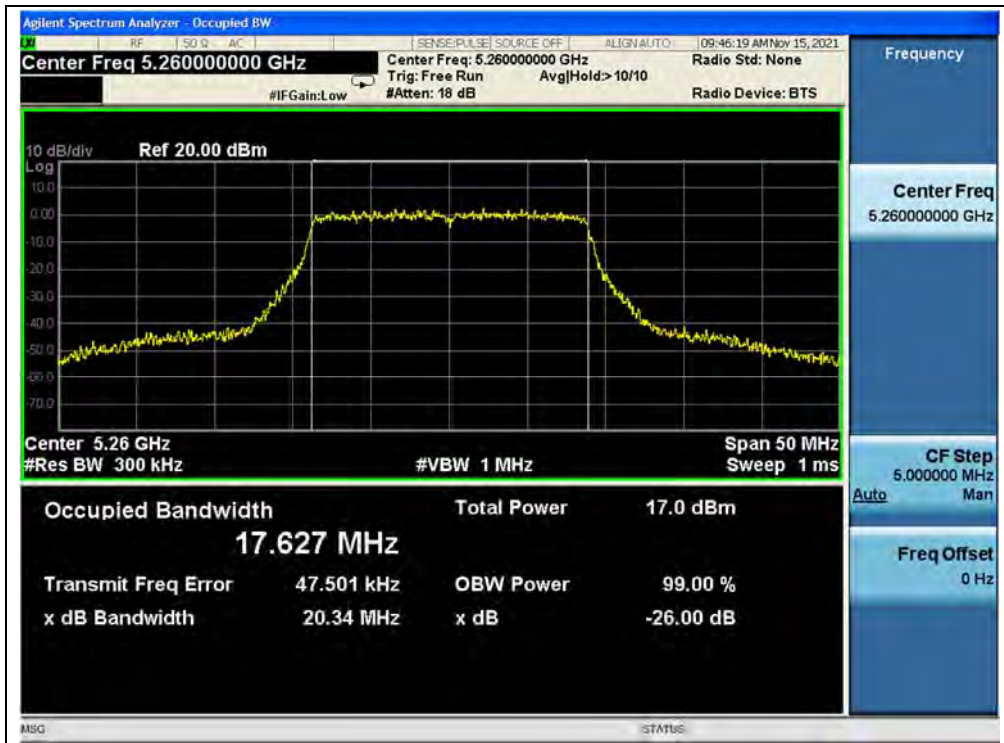

(Channel 52, 5260MHz, 802.11ac (VHT20))

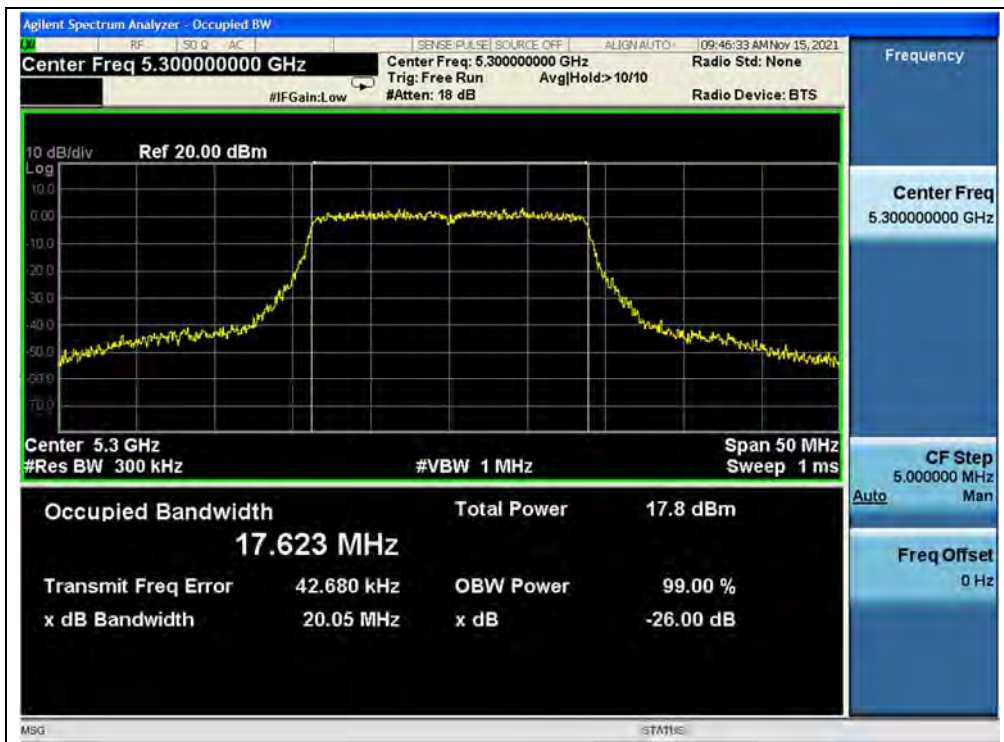


(Channel 60, 5300MHz, 802.11ac (VHT20))

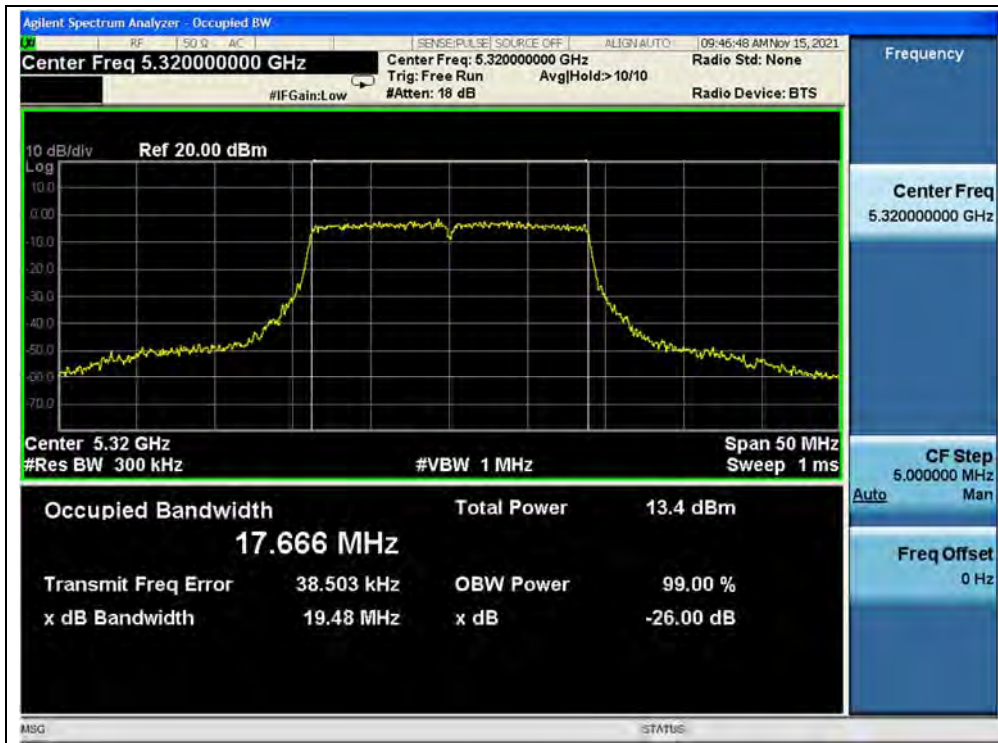

(Channel 64, 5320MHz, 802.11ac (VHT20))




(Channel 100, 5500MHz, 802.11ac (VHT20))

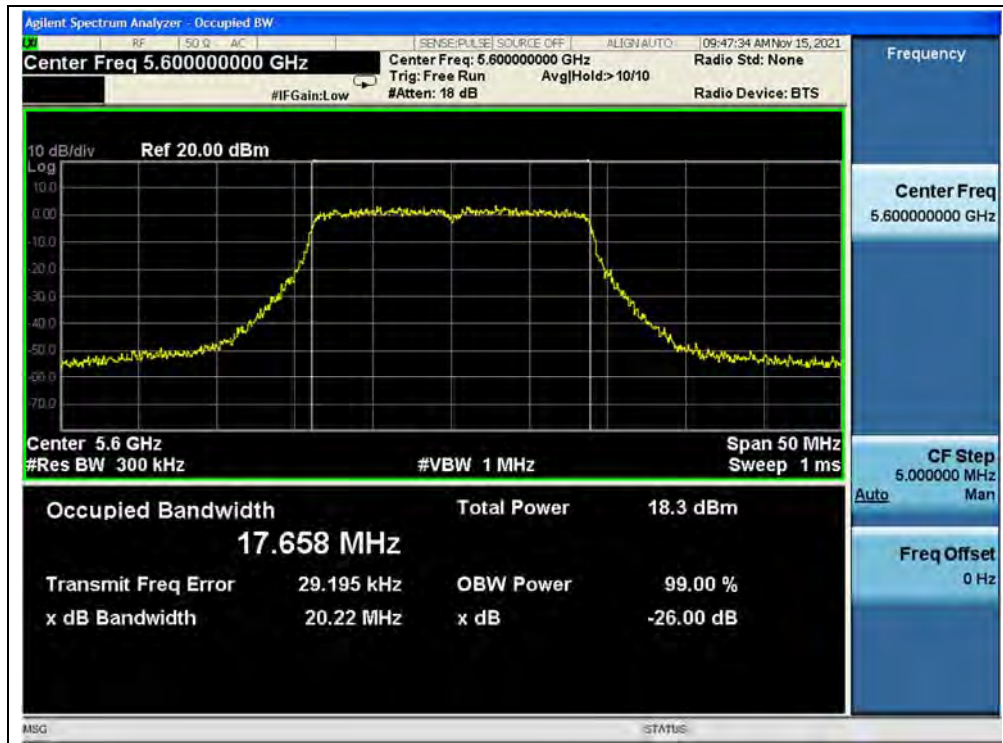

(Channel 120, 5600MHz, 802.11ac (VHT20))




(Channel 144, 5720MHz, 802.11ac (VHT20))

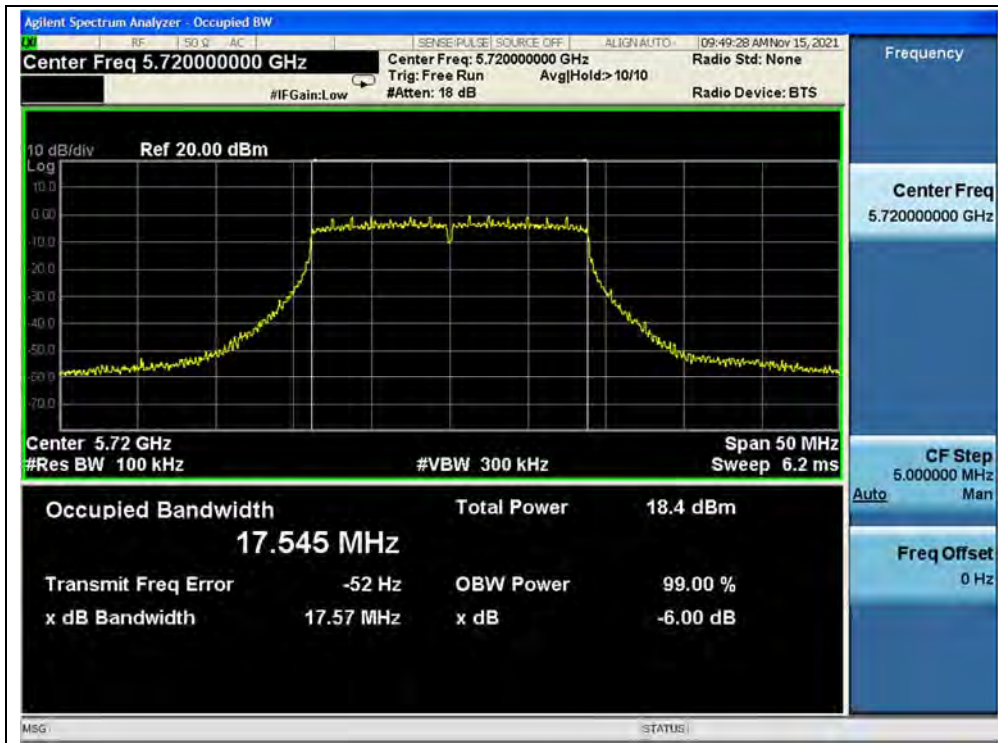


(Channel 144, 5720MHz, 802.11ac (VHT20))



(Channel 149, 5745MHz, 802.11 ac (VHT20))

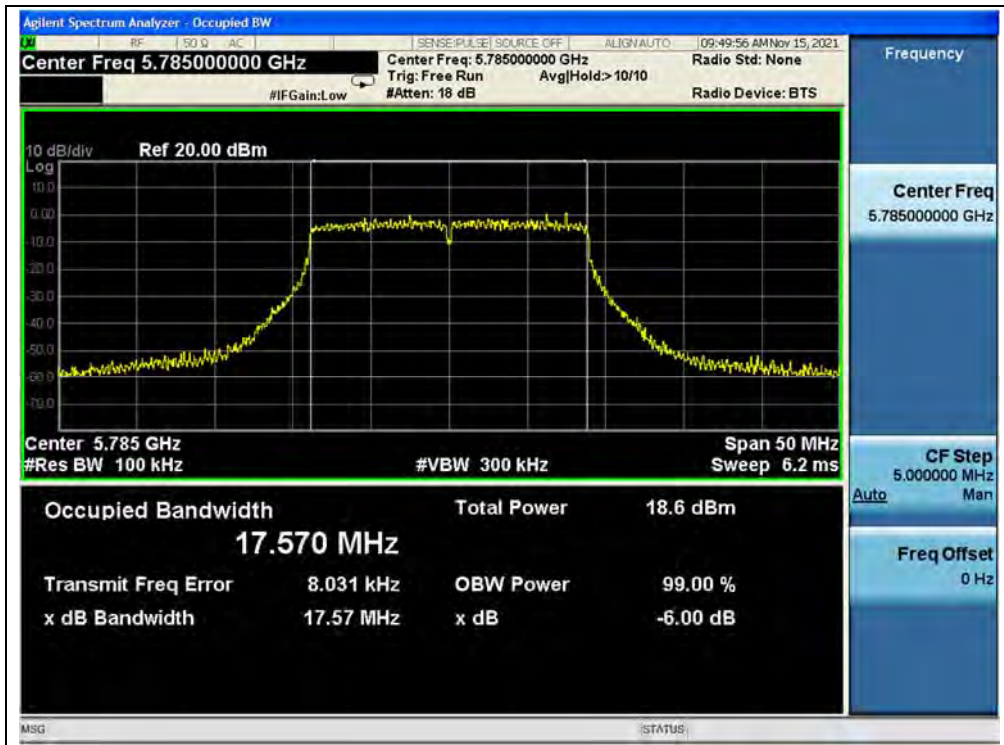

(Channel 157, 5785MHz, 802.11 ac (VHT20))

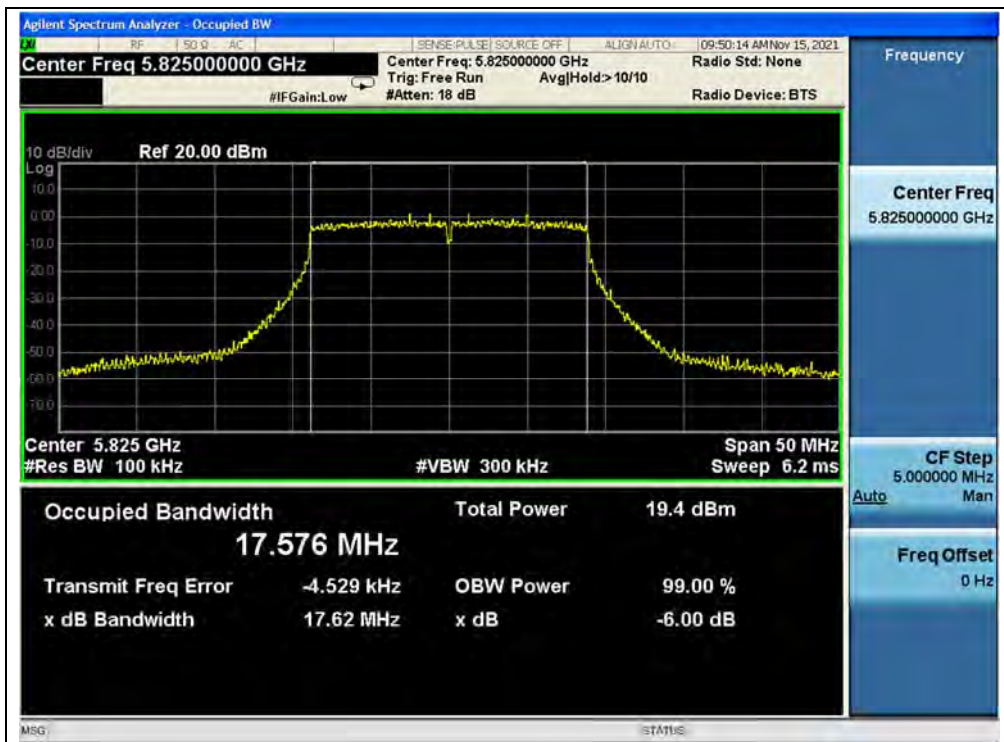

(Channel 165, 5825MHz, 802.11 ac (VHT20))




802.11ac (VHT40) Mode


A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
38	5190	39.77
46	5230	39.71
54	5270	39.09
62	5310	39.56
102	5510	39.88
126	5630	39.71
142	5710	39.74
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
142	5710	36.48
151	5755	36.37
159	5795	36.39

B. Test Plot:

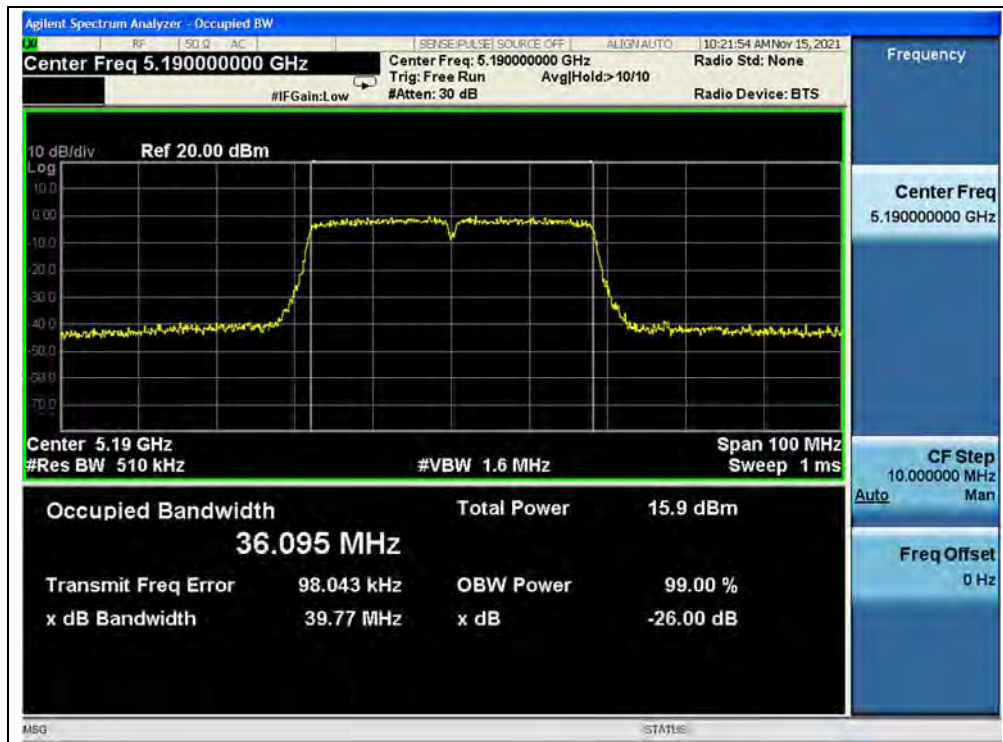


(Channel 38, 5190MHz, 802.11ac (VHT40))

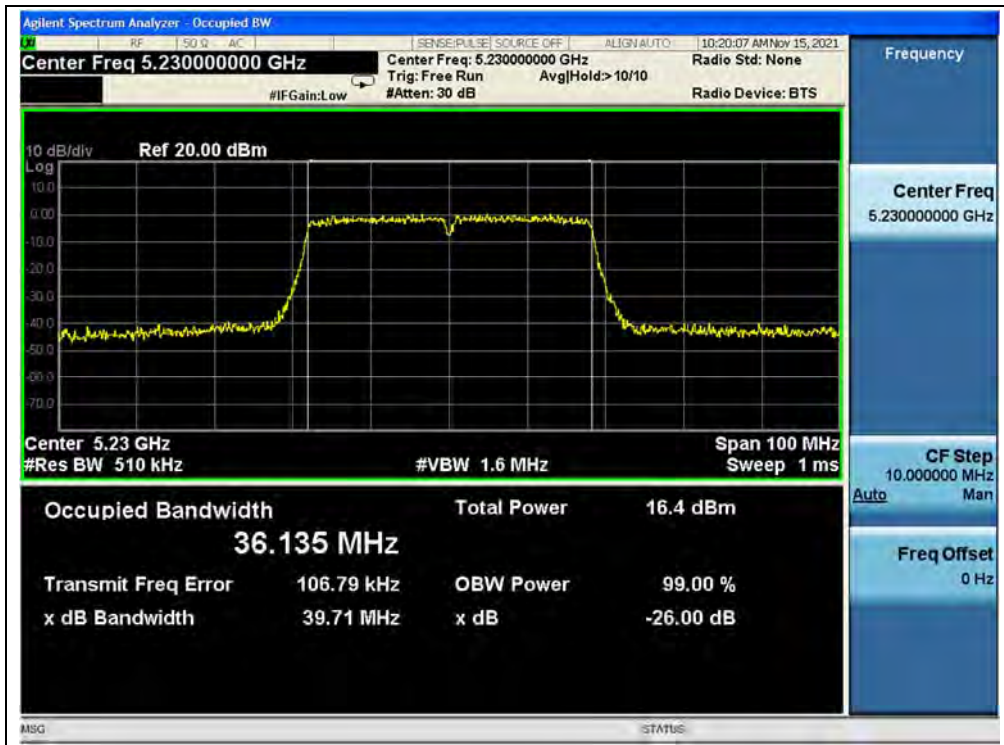


(Channel 46, 5230MHz, 802.11ac (VHT40))




(Channel 54, 5270MHz, 802.11ac (VHT40))

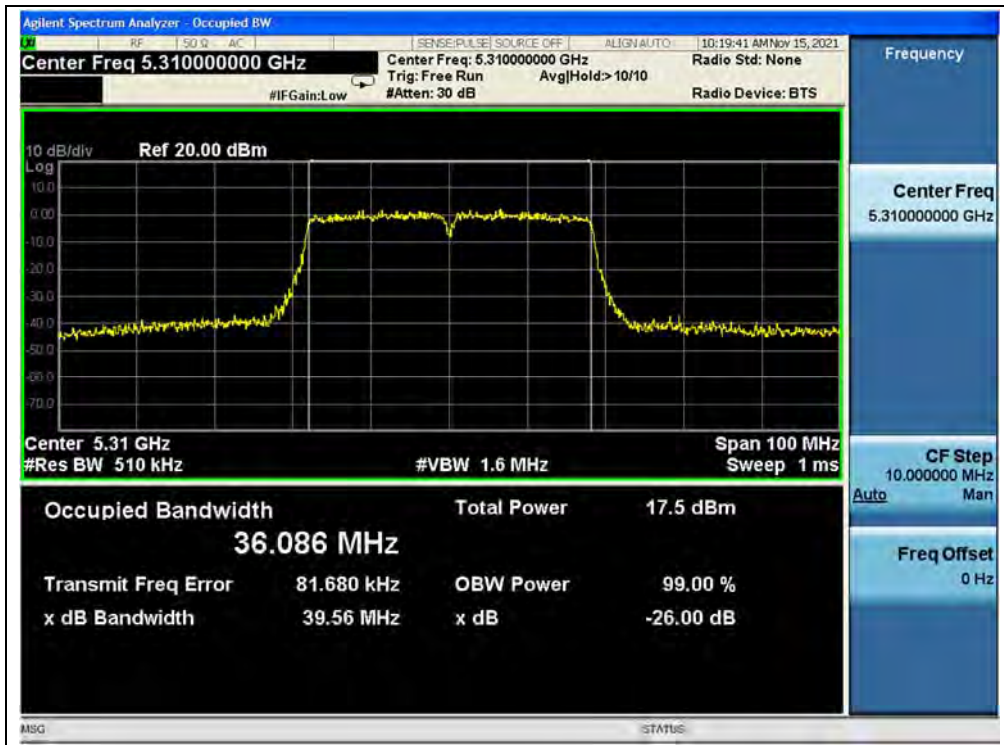


(Channel 62, 5310MHz, 802.11ac (VHT40))

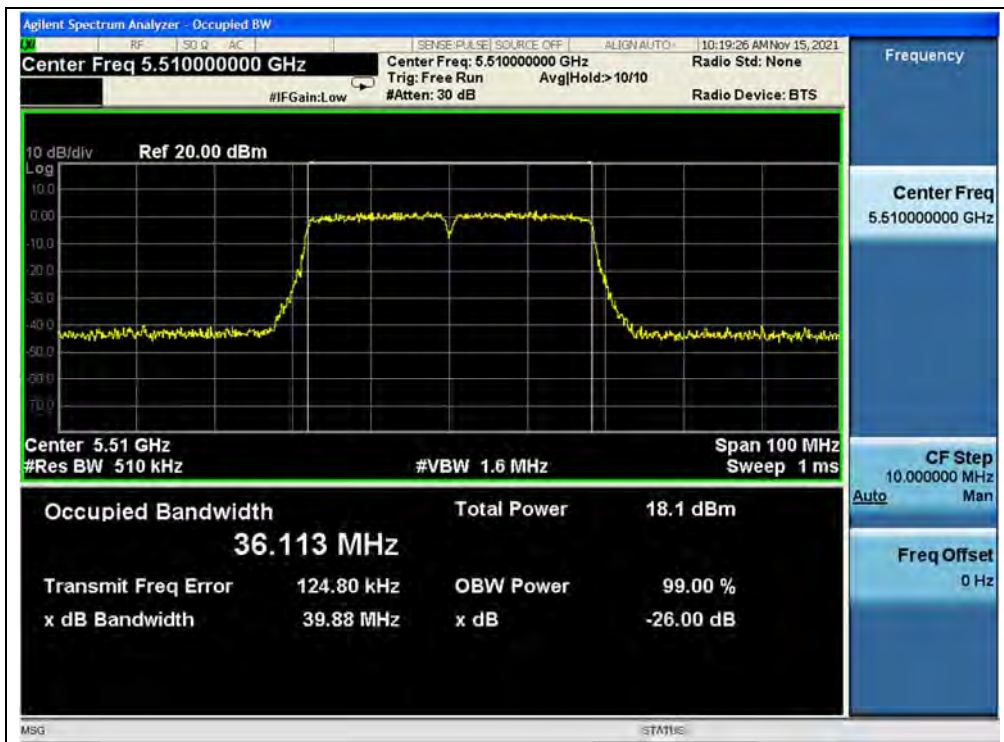


(Channel 102, 5510MHz, 802.11ac (VHT40))

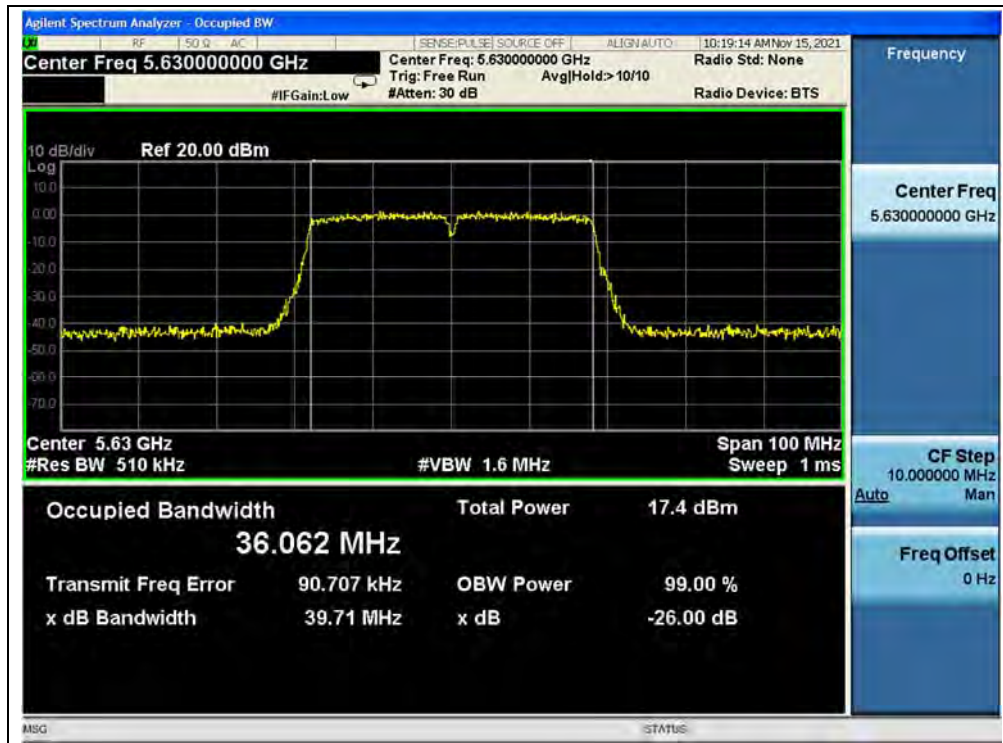


(Channel 126, 5630MHz, 802.11ac (VHT40))

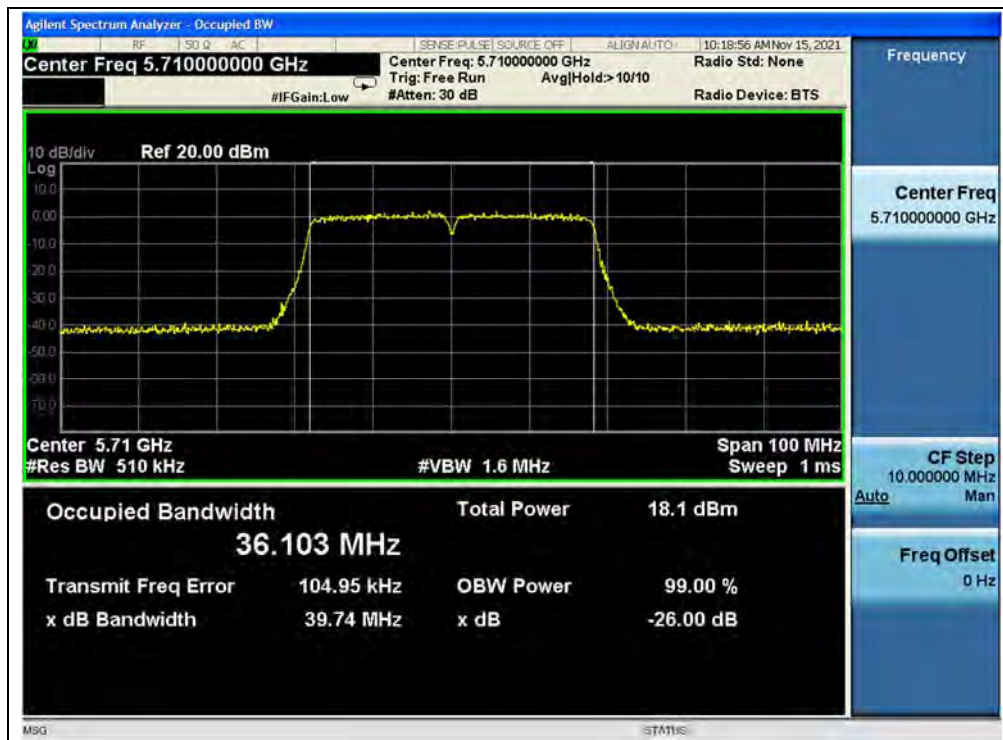


(Channel 142, 5710MHz, 802.11ac (VHT40))

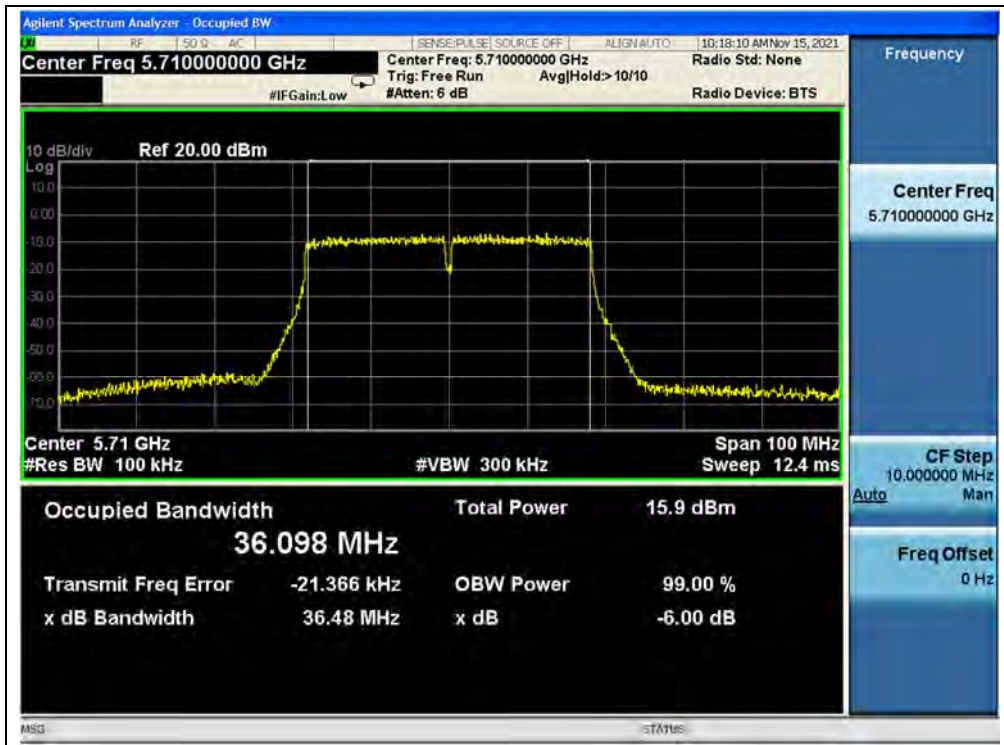

(Channel 142, 5710MHz, 802.11ac (VHT40))

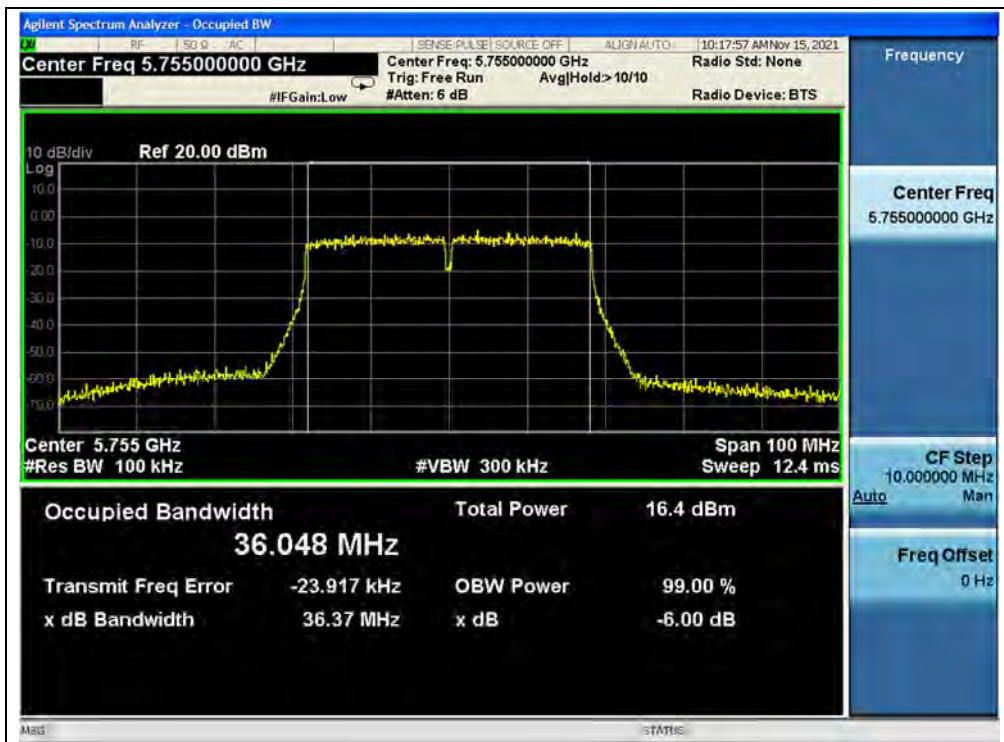

(Channel 151, 5755MHz, 802.11ac (VHT40))

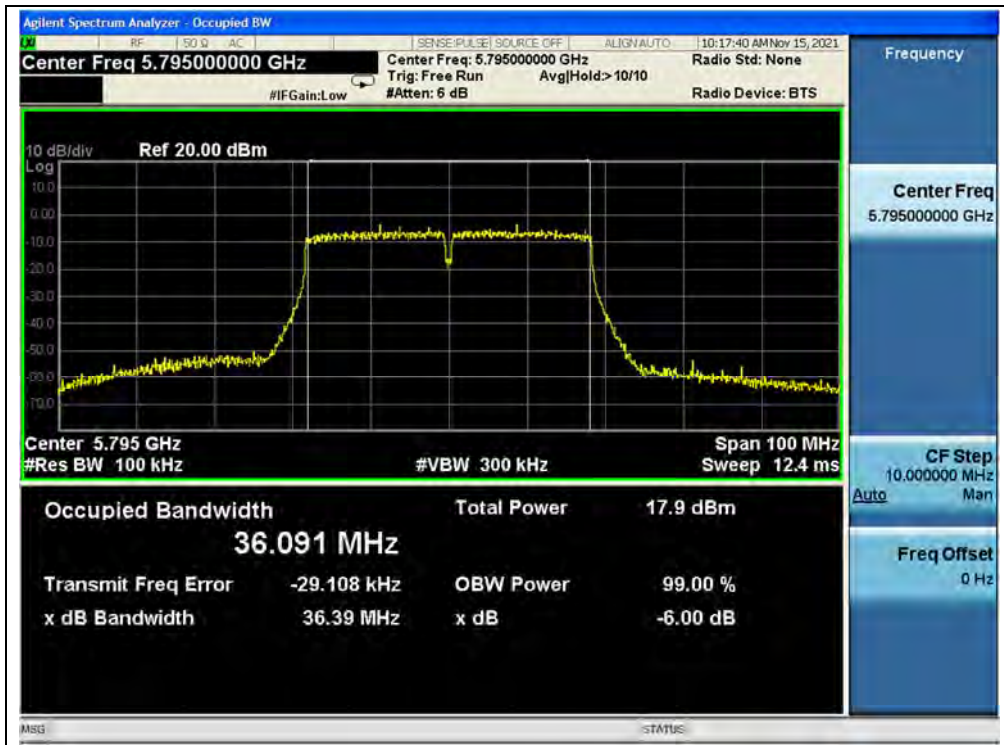

(Channel 159, 5795MHz, 802.11ac (VHT40))




802.11ac (VHT80) Mode


A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
42	5210	81.06
58	5290	81.43
106	5530	81.01
122	5610	81.66
138	5690	81.74
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
138	5690	76.37
155	5775	76.34

B. Test Plot:

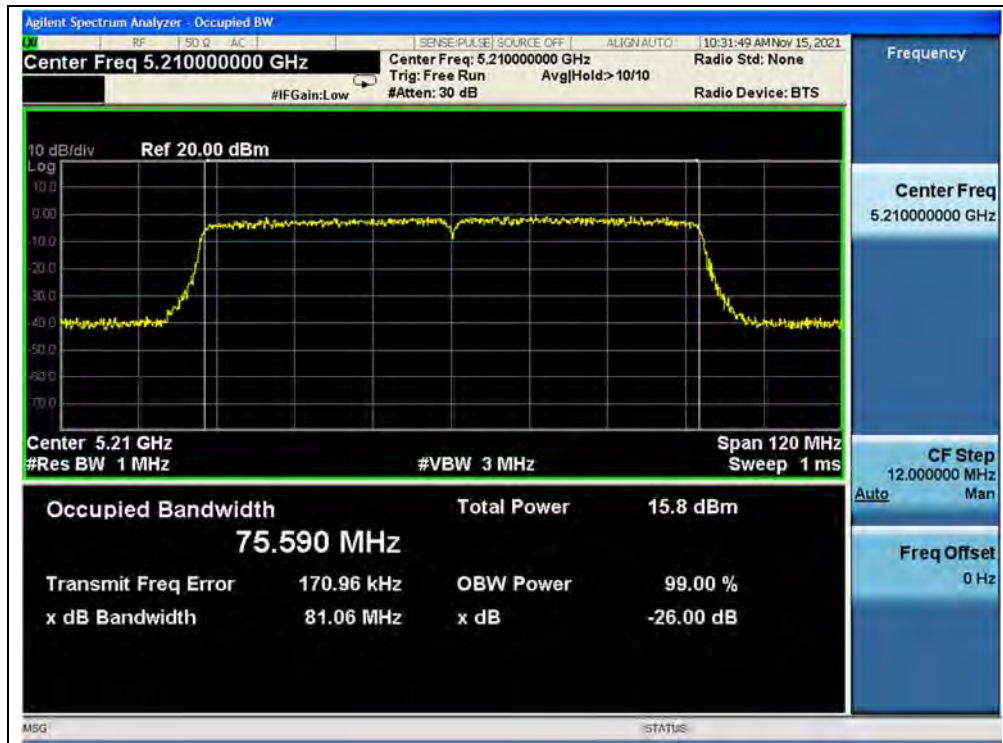


(Channel 42, 5210MHz, 802.11ac (VHT80))

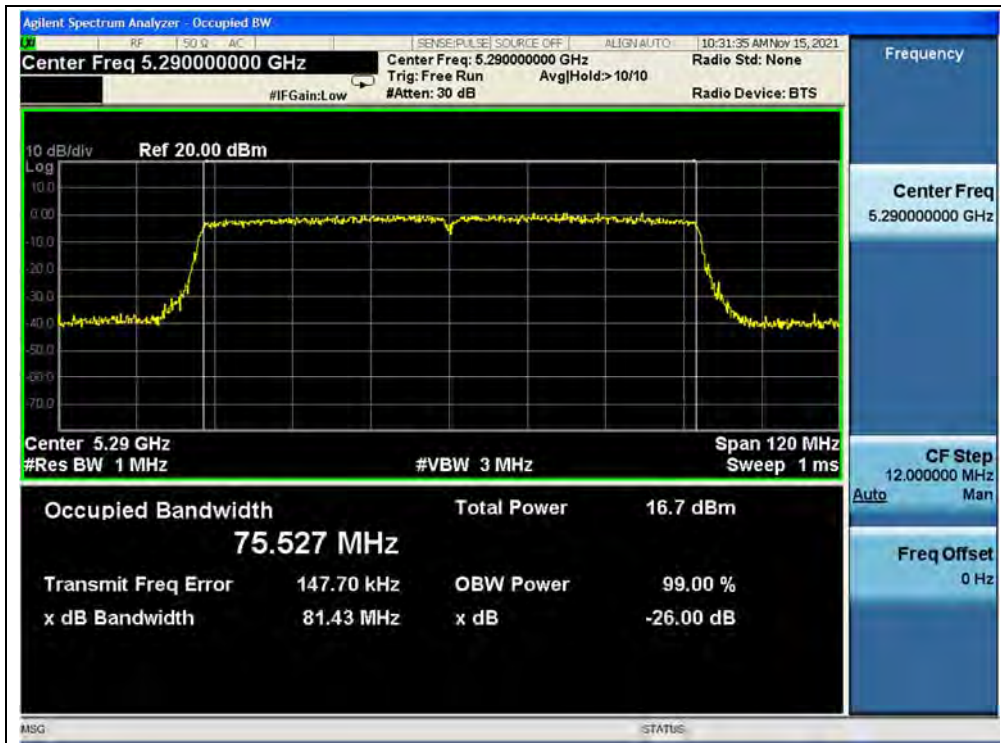

(Channel 58, 5290MHz, 802.11ac (VHT80))




(Channel 106, 5530MHz, 802.11ac (VHT80))

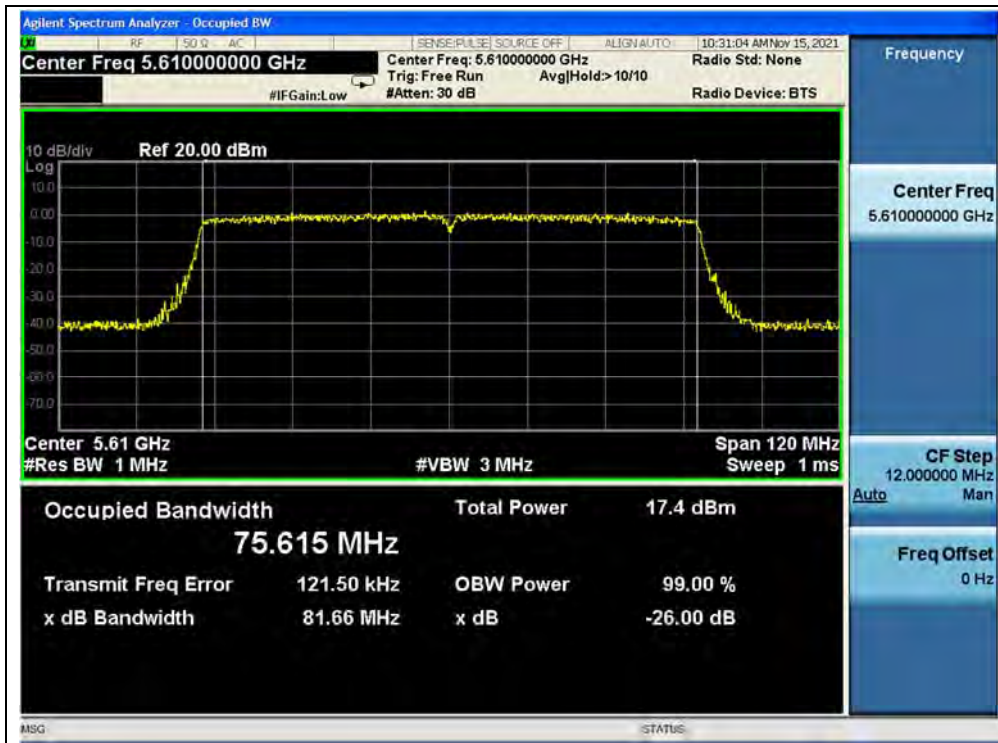


(Channel 122, 5610MHz, 802.11ac (VHT80))



(Channel 138, 5690MHz, 802.11ac (VHT80))

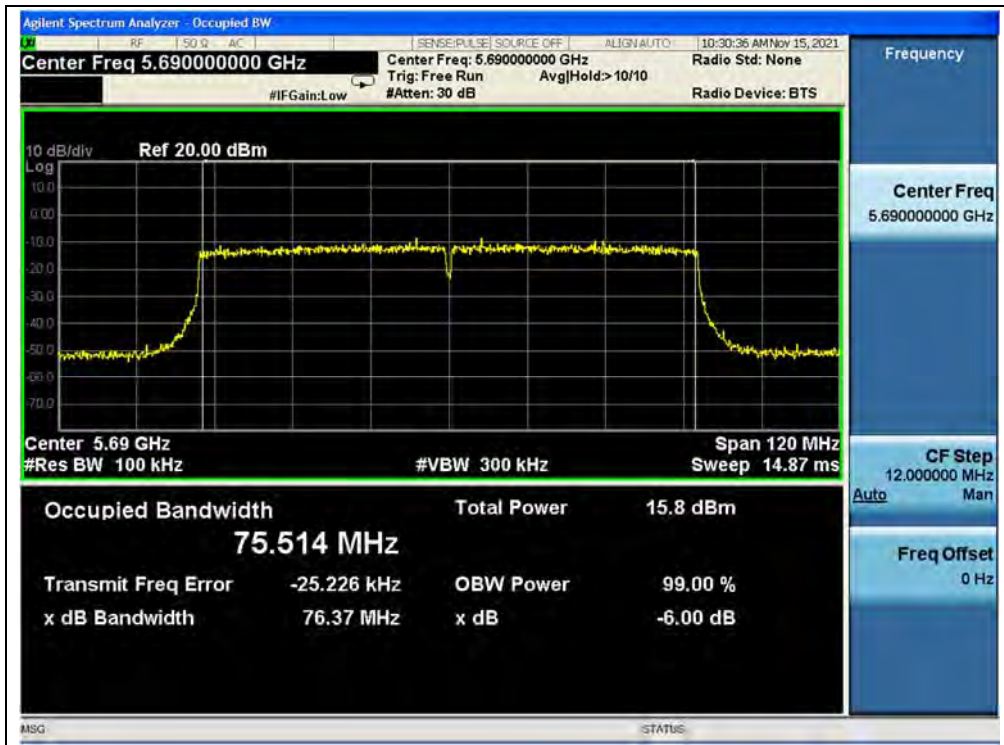

(Channel 138, 5690MHz, 802.11ac (VHT80))

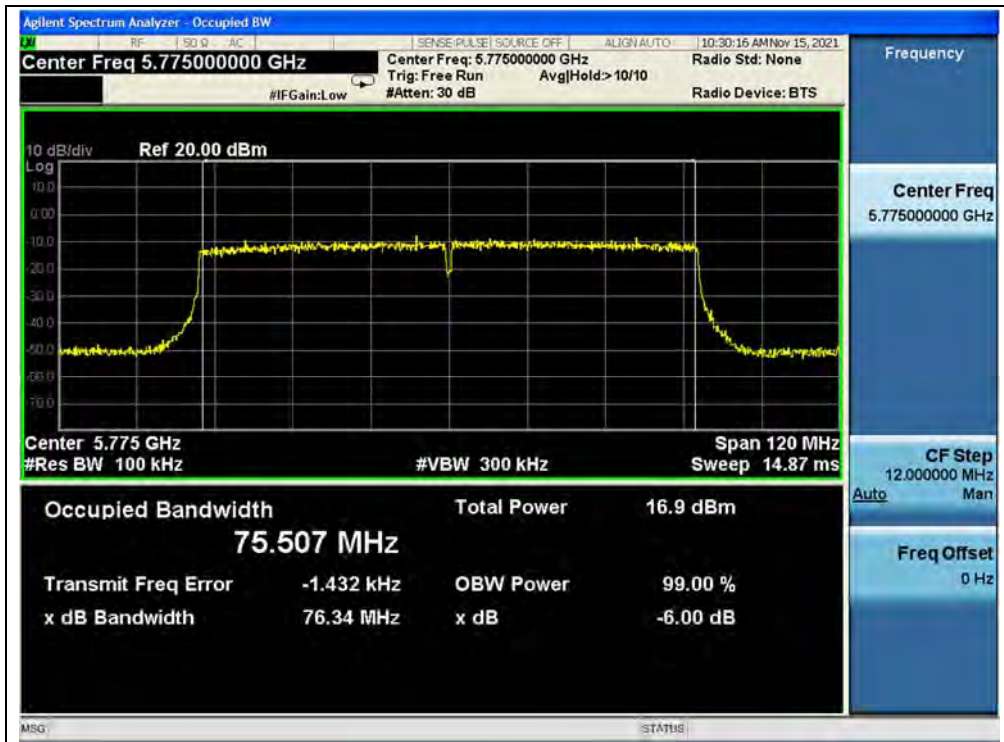

(Channel 155, 5775MHz, 802.11ac (VHT80))




802.11ax (HEW20) Mode

A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	20.82
44	5220	20.82
48	5240	20.85
52	5260	20.81
60	5300	20.82
64	5320	20.93
100	5500	20.88
120	5600	20.70
144	5720	20.89
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
144	5720	18.85
149	5745	18.94
157	5785	18.86
165	5825	18.62

B. Test Plot:

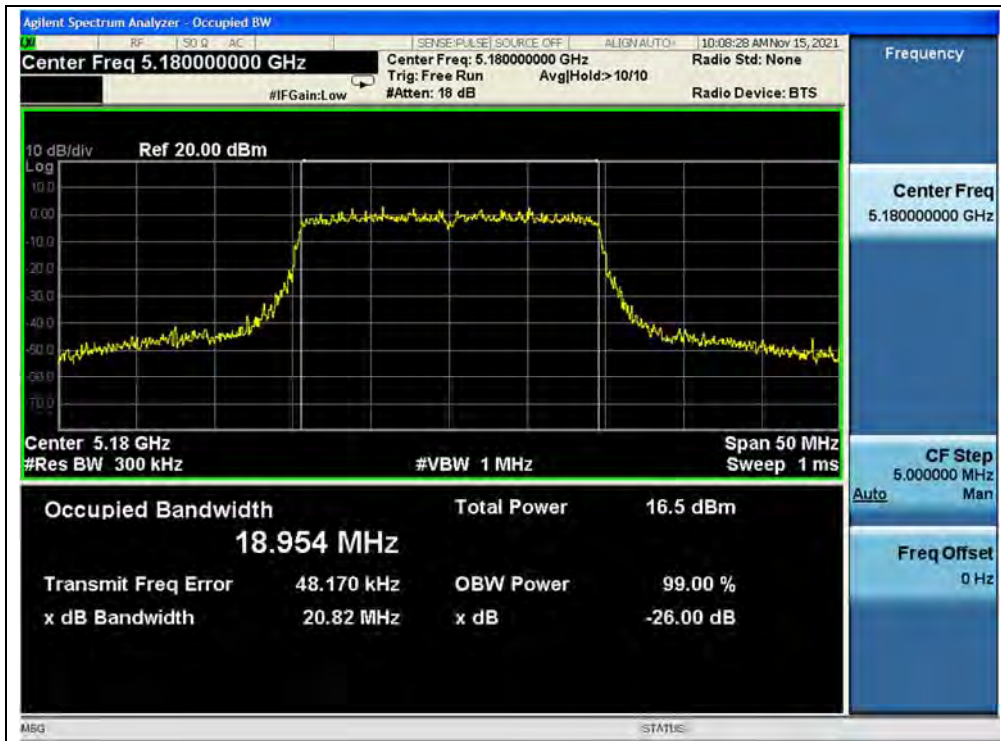


(Channel 36, 5180MHz, 802.11ax (HEW20))




(Channel 44, 5220MHz, 802.11ax (HEW20))




(Channel 48, 5240MHz, 802.11ax (HEW20))

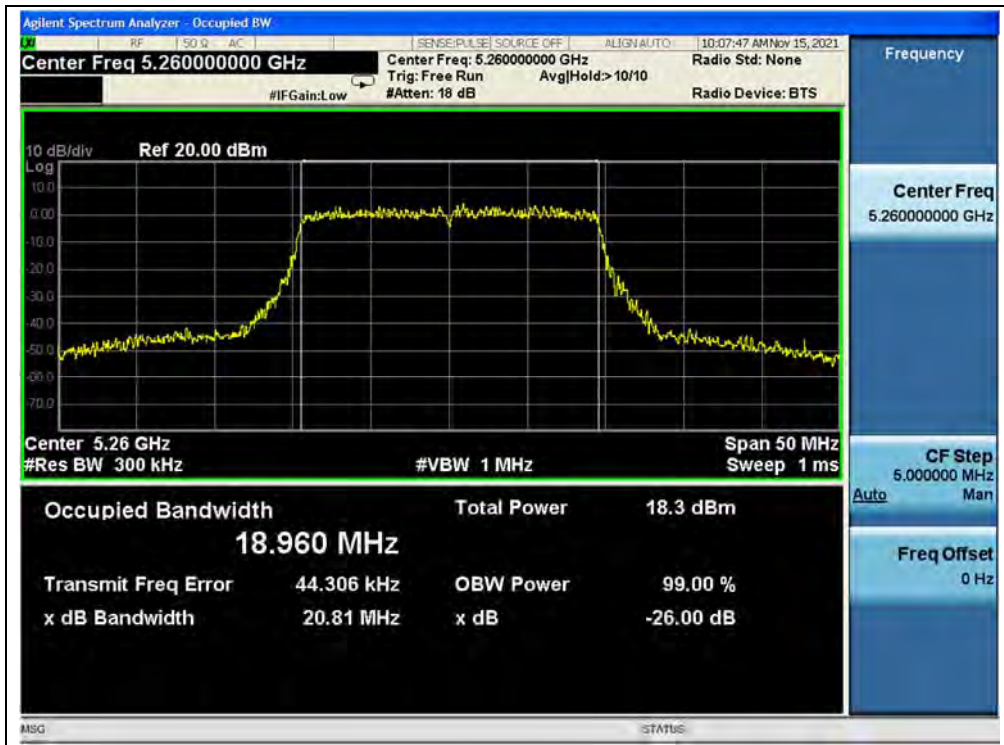

(Channel 52, 5260MHz, 802.11ax (HEW20))

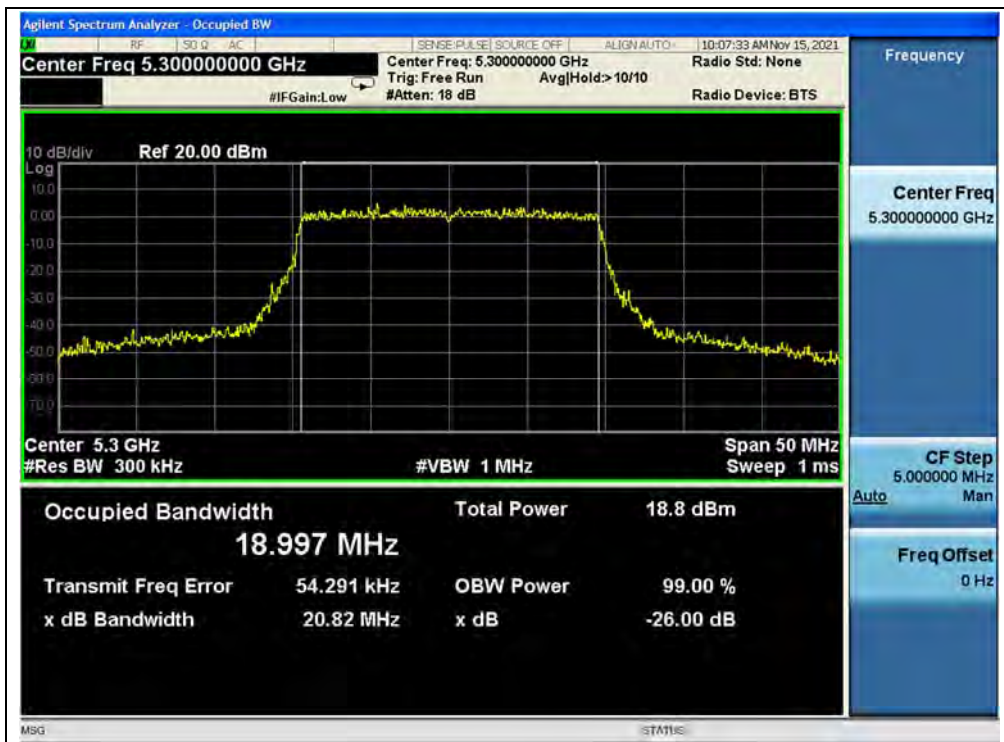


(Channel 60, 5300MHz, 802.11ax (HEW20))

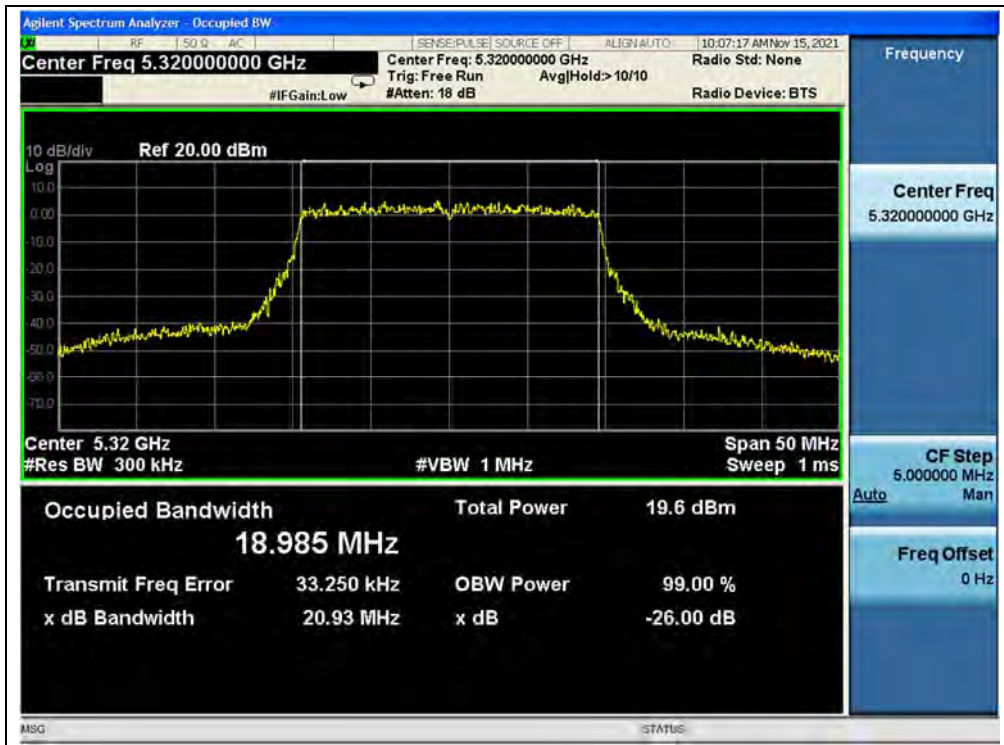

(Channel 64, 5320MHz, 802.11ax (HEW20))




(Channel 100, 5500MHz, 802.11ax (HEW20))

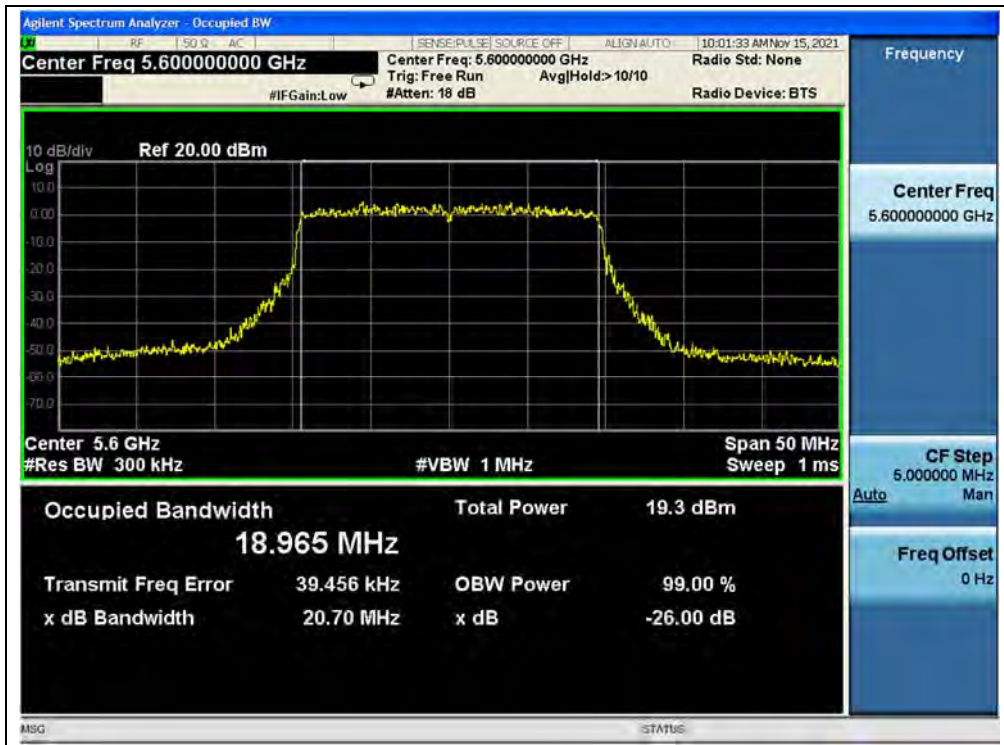

(Channel 120, 5600MHz, 802.11ax (HEW20))




(Channel 144, 5720MHz, 802.11ax (HEW20))

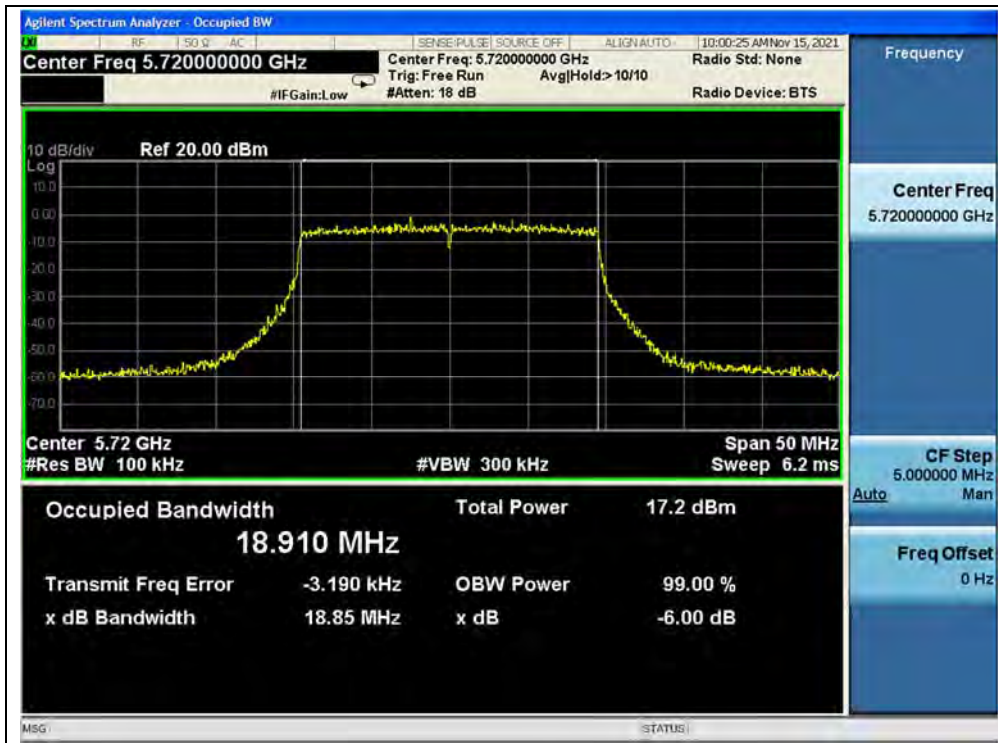


(Channel 144, 5720MHz, 802.11ax (HEW20))



(Channel 149, 5745MHz, 802.11ax (HEW20))

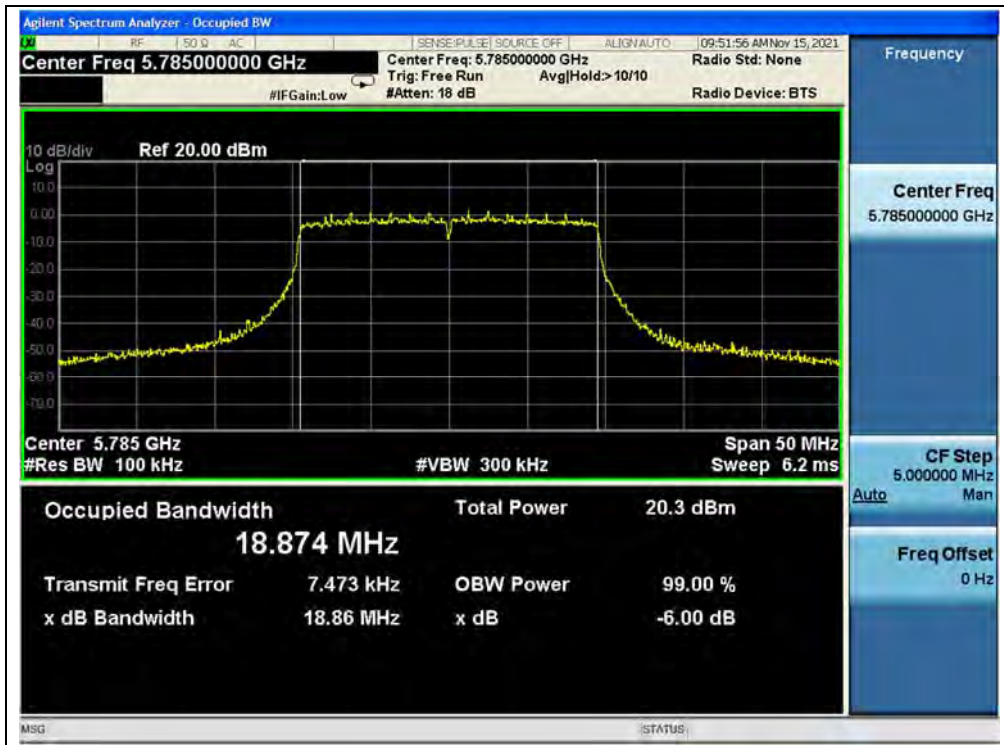

(Channel 157, 5785MHz, 802.11ax (HEW20))

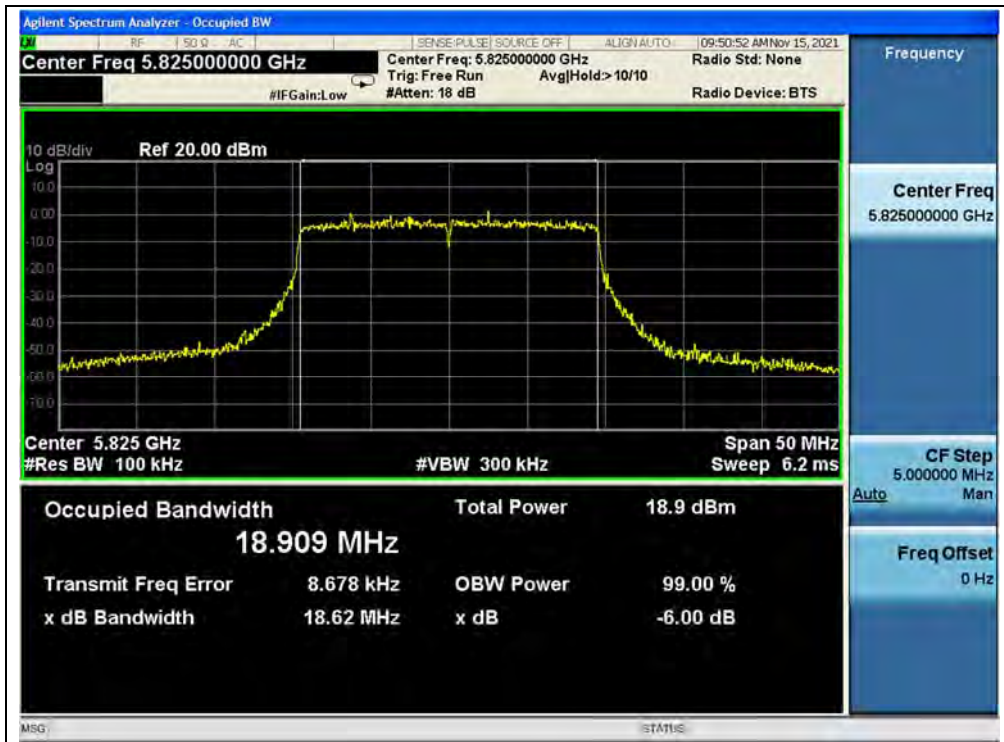

(Channel 165, 5825MHz, 802.11ax (HEW20))




802.11ax (HEW20) RU26 Mode


A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	21.06
44	5220	21.04
48	5240	21.22
52	5260	21.10
60	5300	20.60
64	5320	21.19
100	5500	21.28
120	5600	21.16
144	5720	21.15
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
144	5720	2.13
149	5745	2.10
157	5785	2.09
165	5825	2.11


B. Test Plot:

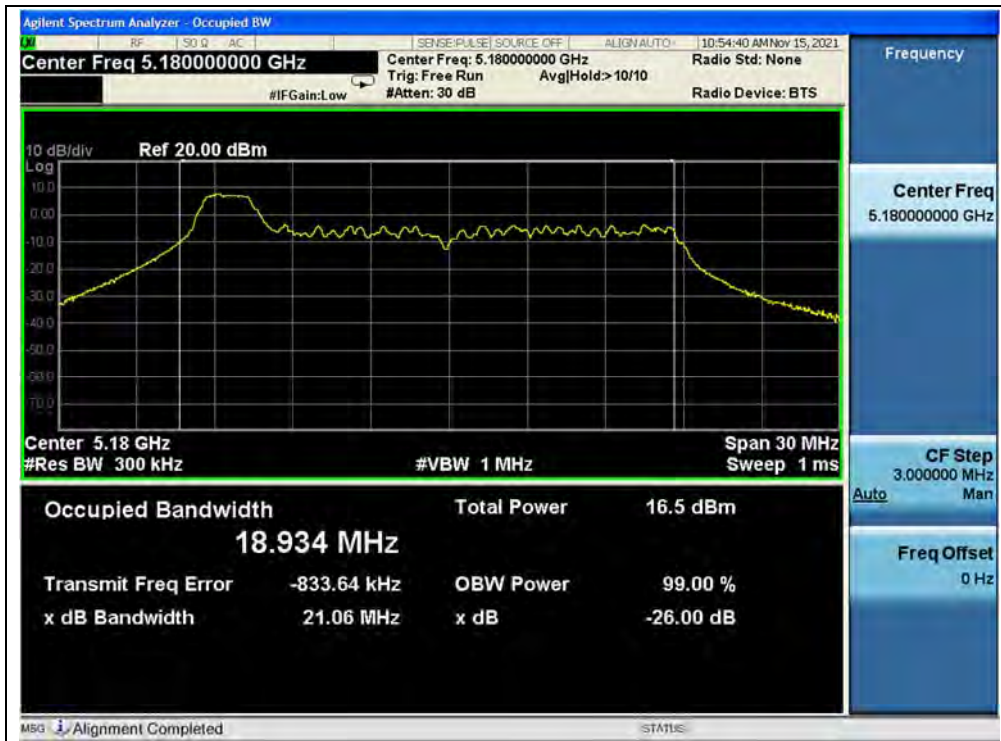


(Channel 36, 5180MHz, 802.11ax (HEW20) RU26)

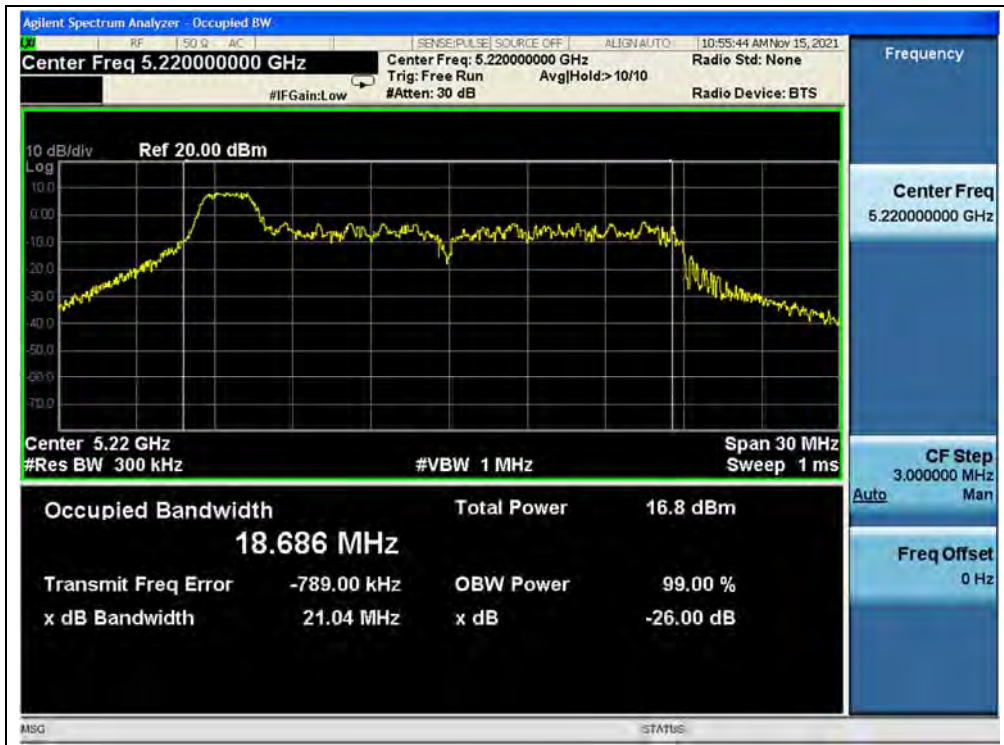


(Channel 44, 5220MHz, 802.11ax (HEW20) RU26)

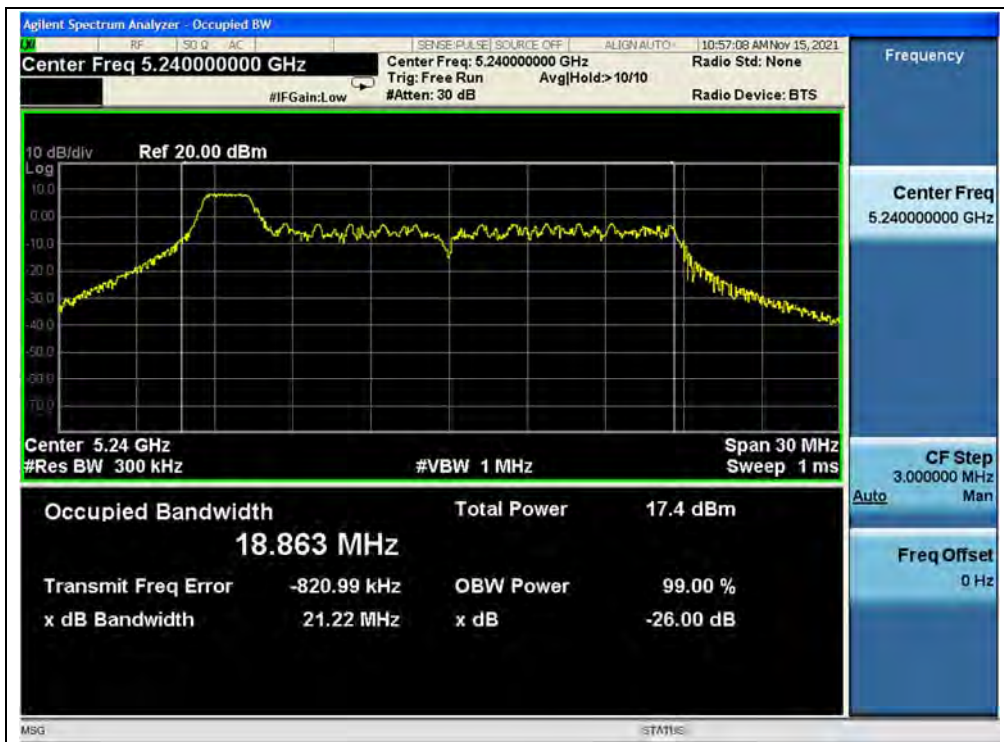

(Channel 48, 5240MHz, 802.11ax (HEW20) RU26)

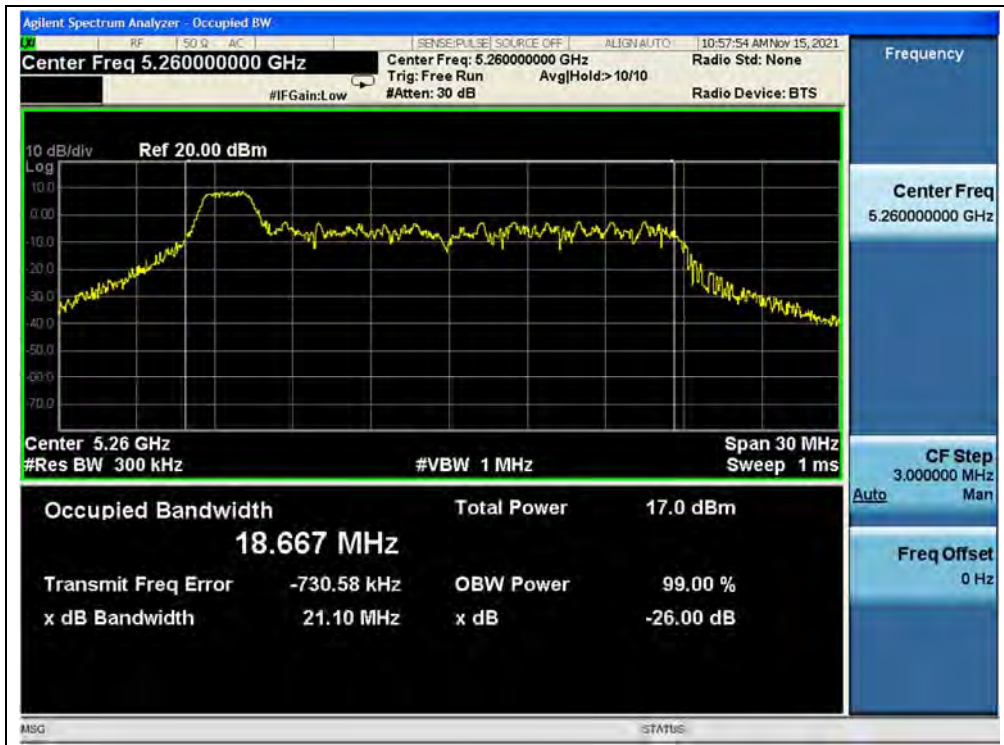

(Channel 52, 5260MHz, 802.11ax (HEW20) RU26)

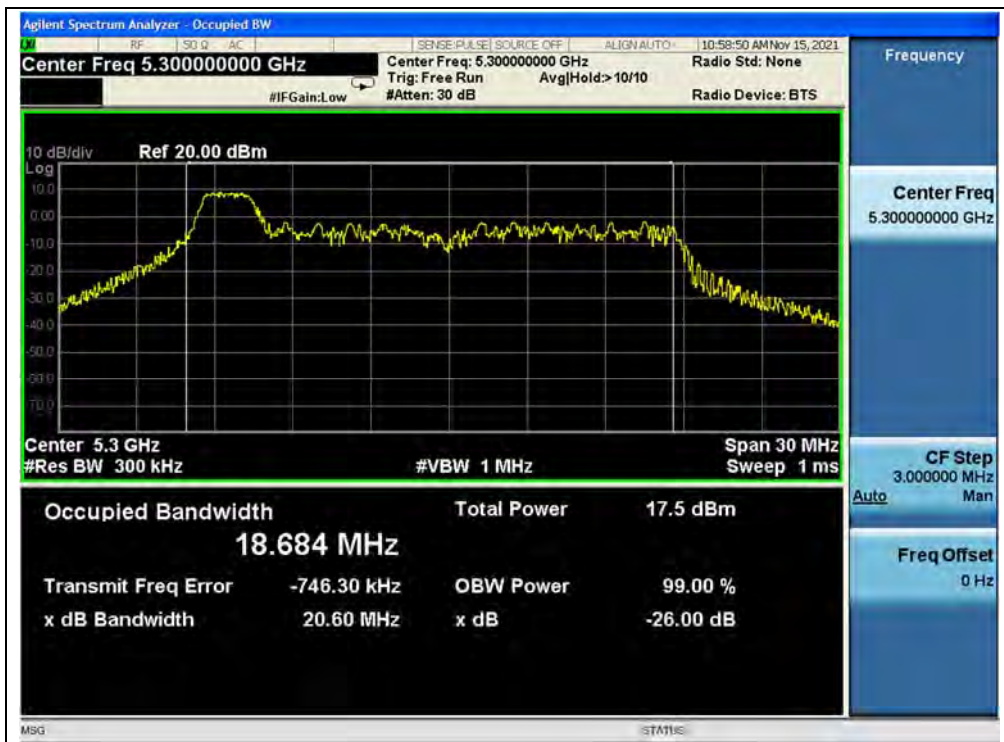

(Channel 60, 5300MHz, 802.11ax (HEW20) RU26)



(Channel 64, 5320MHz, 802.11ax (HEW20) RU26)



(Channel 100, 5500MHz, 802.11ax (HEW20) RU26)



(Channel 120, 5600MHz, 802.11ax (HEW20) RU26)




(Channel 144, 5720MHz, 802.11ax (HEW20) RU26)



(Channel 144, 5720MHz, 802.11ax (HEW20) RU26)



(Channel 149, 5745MHz, 802.11ax (HEW20) RU26)

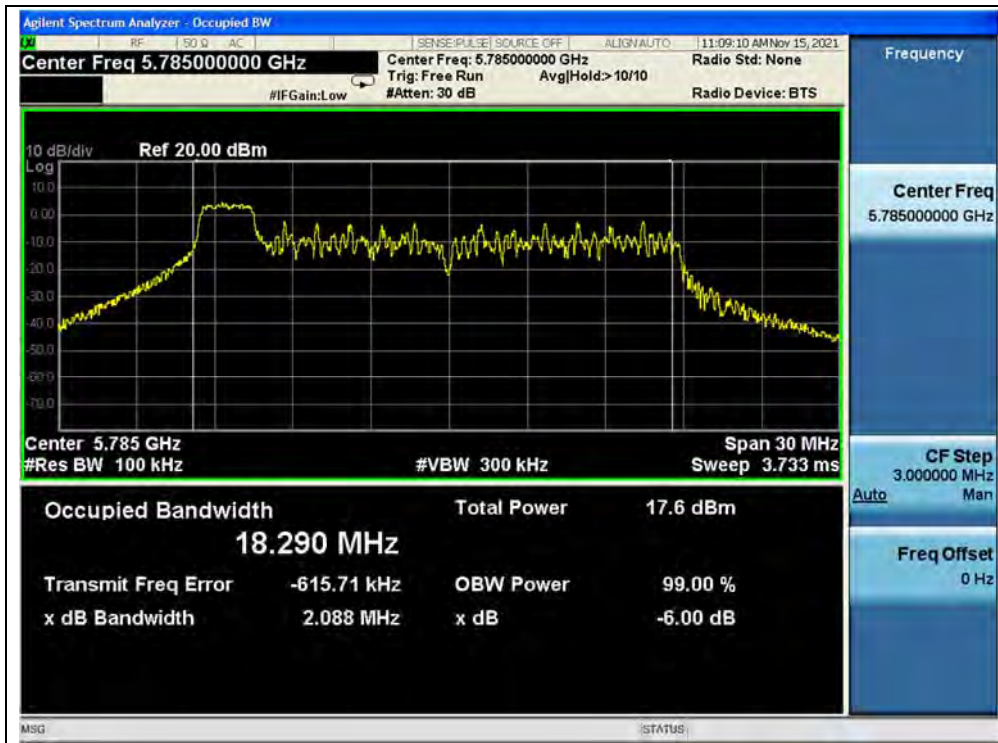

(Channel 157, 5785MHz, 802.11ax (HEW20) RU26)



(Channel 165, 5825MHz, 802.11ax (HEW20) RU26)




802.11ax (HEW40) Mode


A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
38	5190	40.71
46	5230	40.06
54	5270	40.06
62	5310	40.49
102	5510	40.15
126	5630	40.18
142	5710	39.99
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
142	5710	38.07
151	5755	38.11
159	5795	38.11


B. Test Plot:

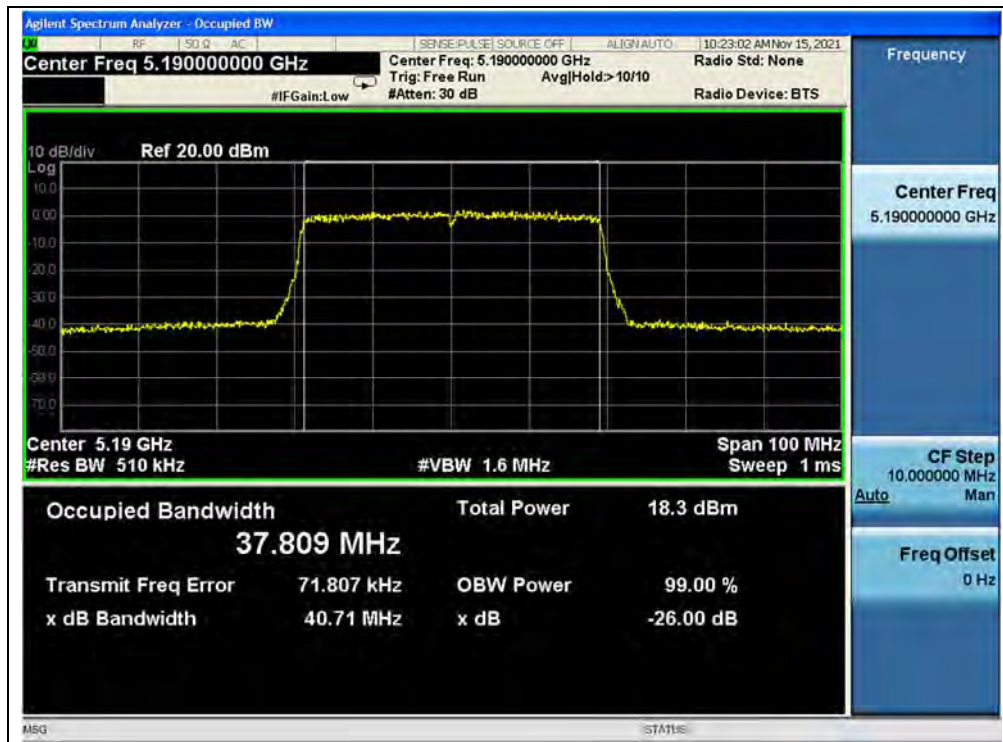


(Channel 38, 5190MHz, 802.11ax (HEW40))

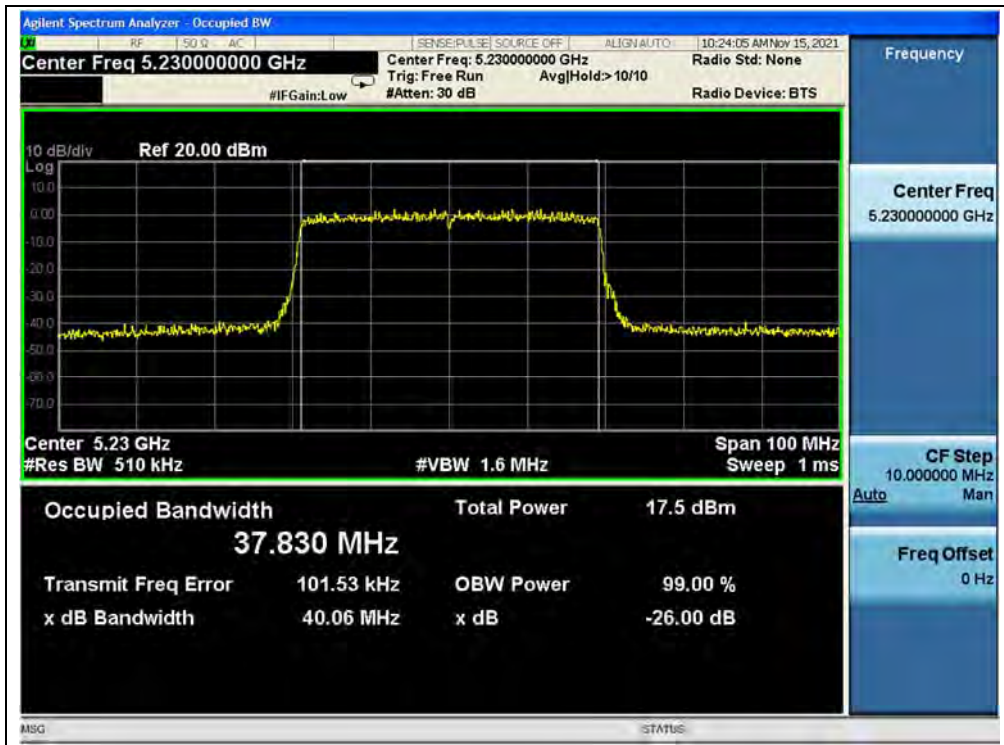


(Channel 46, 5230MHz, 802.11ax (HEW40))

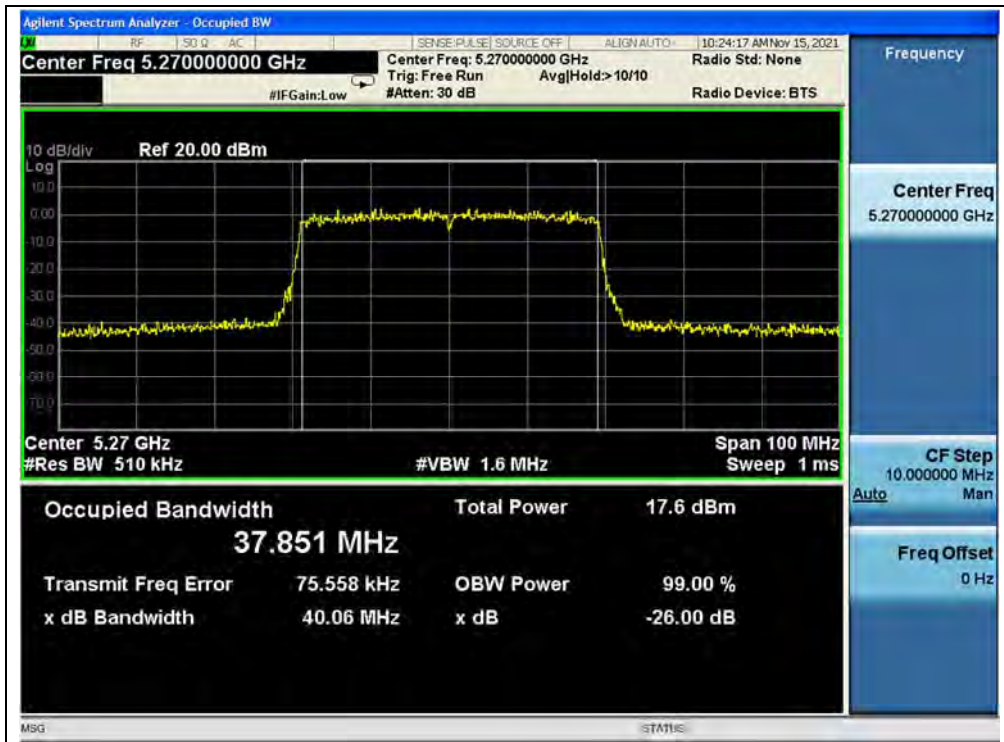


(Channel 54, 5270MHz, 802.11ax (HEW40))

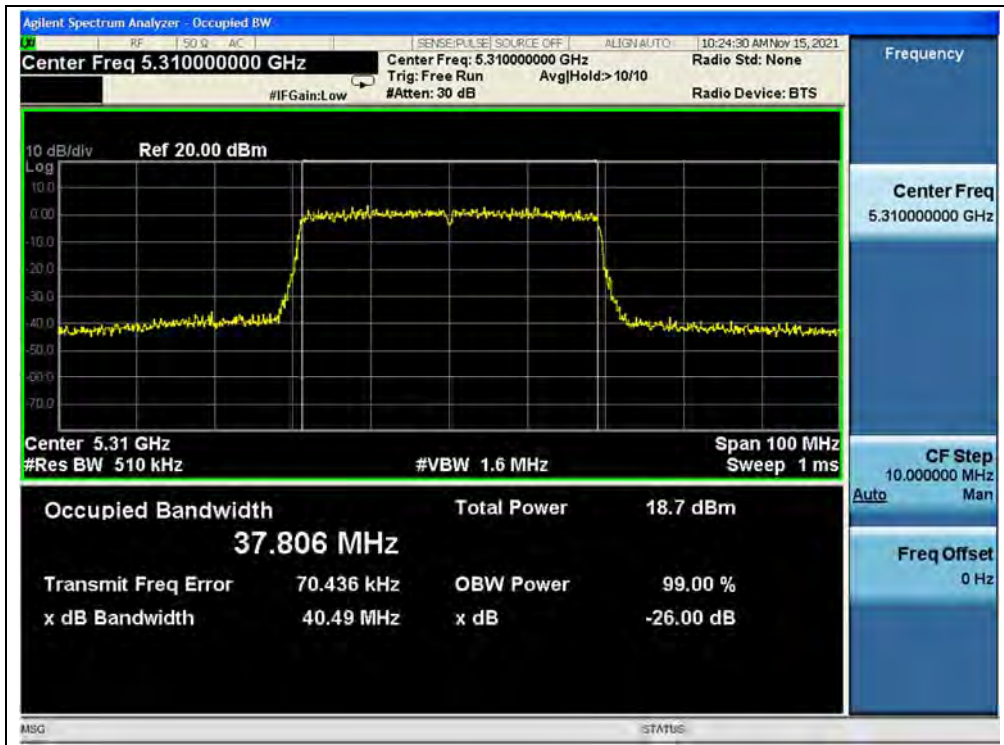


(Channel 62, 5310MHz, 802.11ax (HEW40))

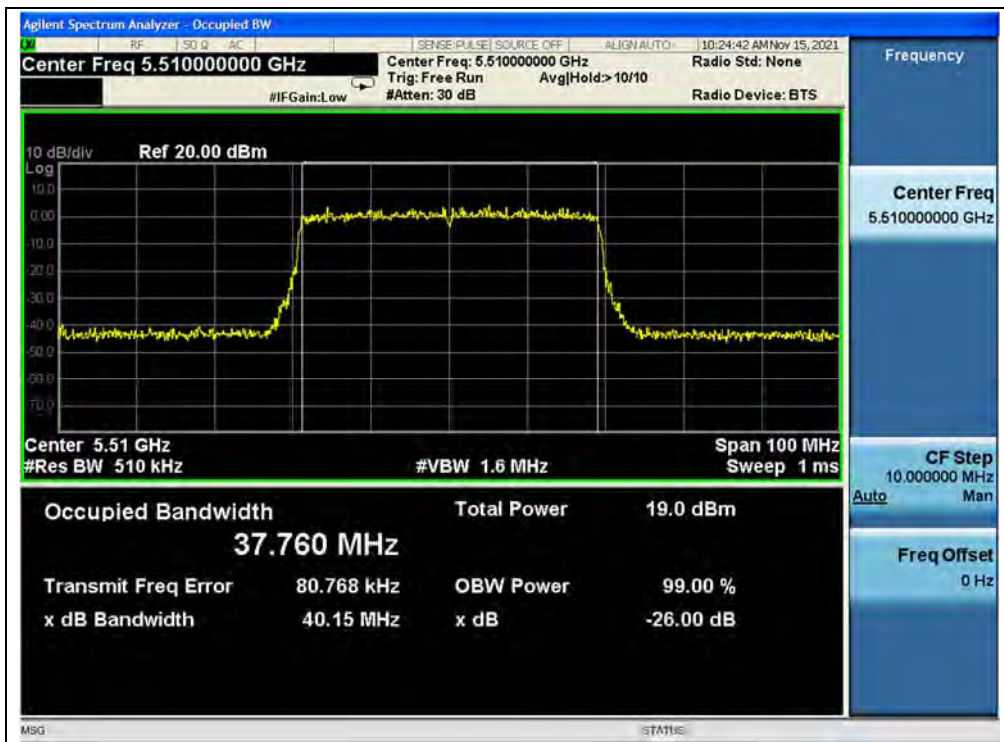


(Channel 102, 5510MHz, 802.11ax (HEW40))

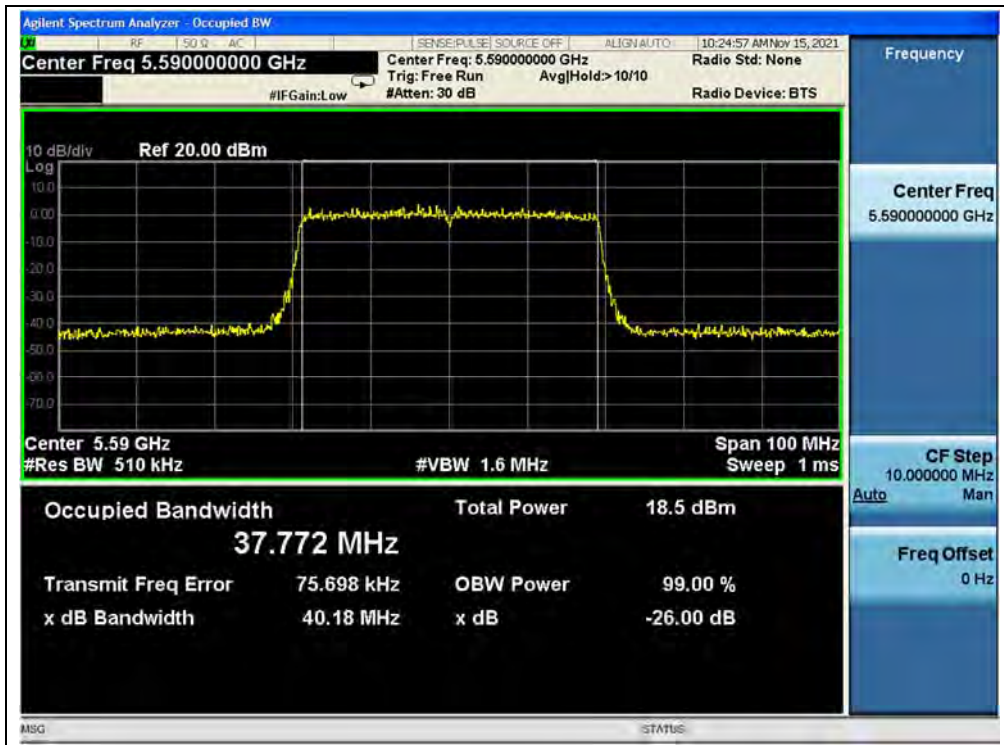


(Channel 126, 5630MHz, 802.11ax (HEW40))

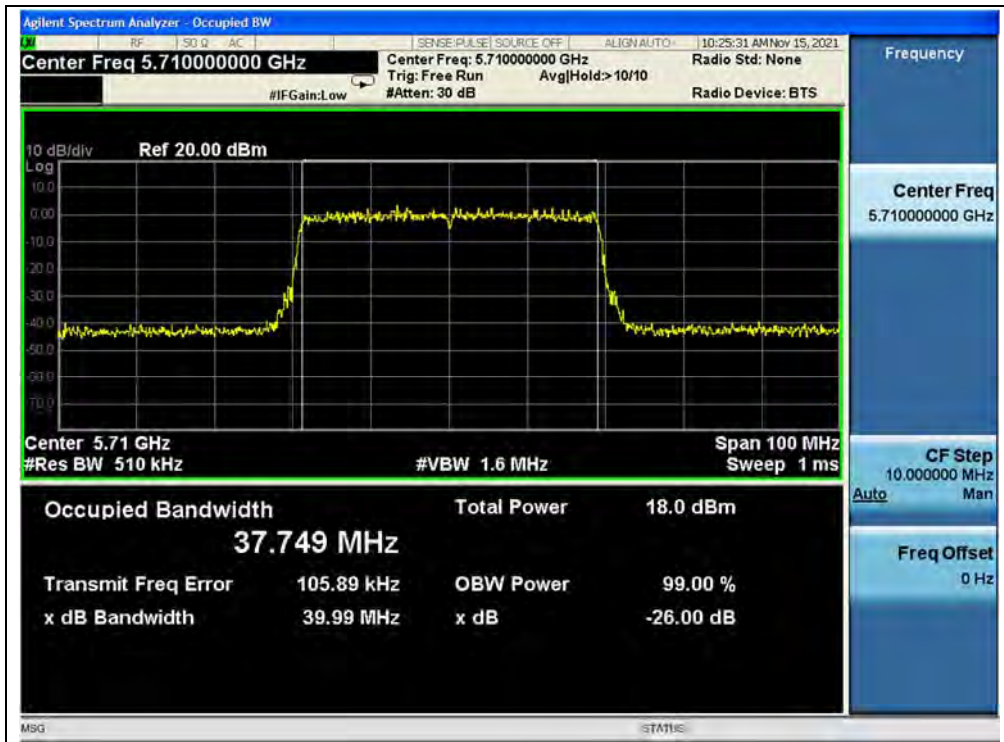


(Channel 142, 5710MHz, 802.11ax (HEW40))

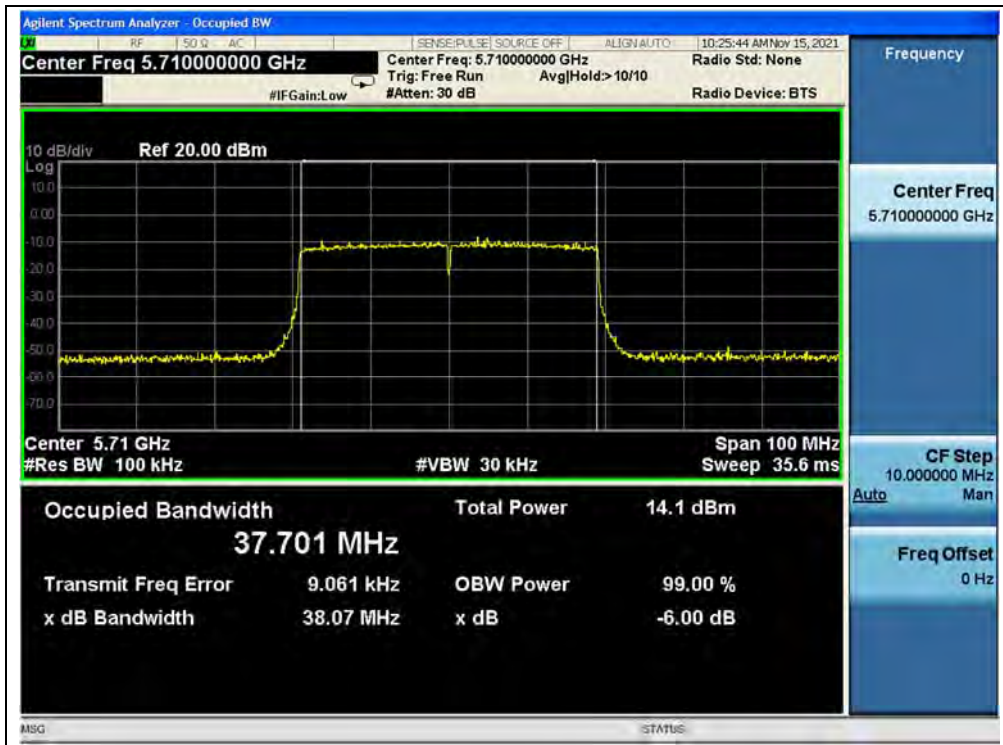

(Channel 142, 5710MHz, 802.11ax (HEW40))

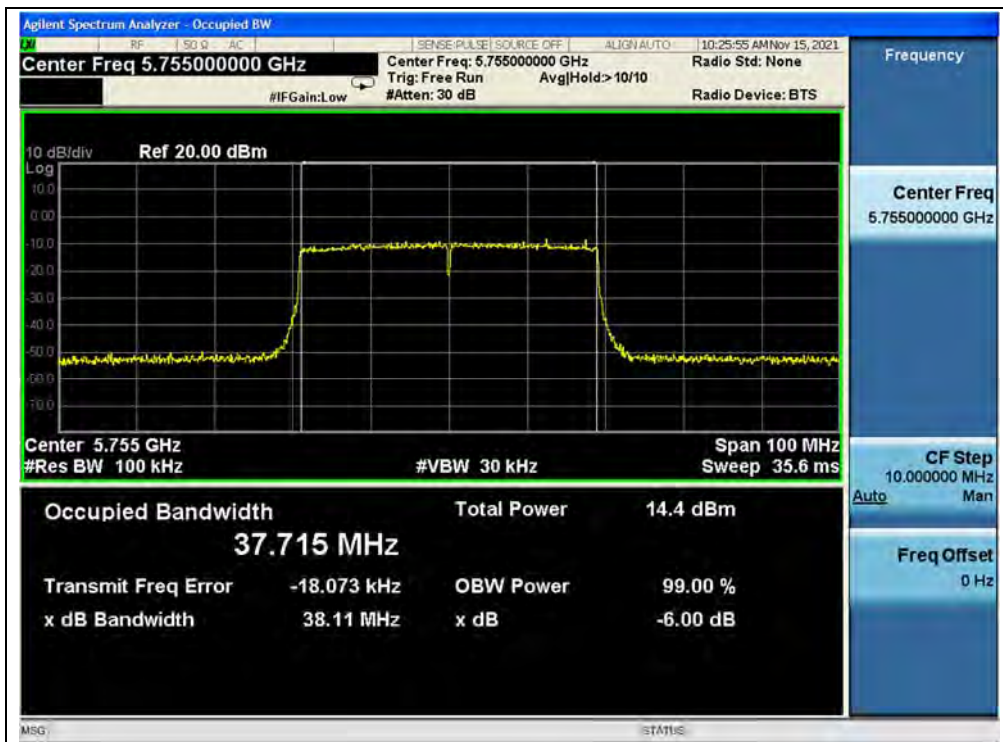

(Channel 151, 5755MHz, 802.11ax (HEW40))

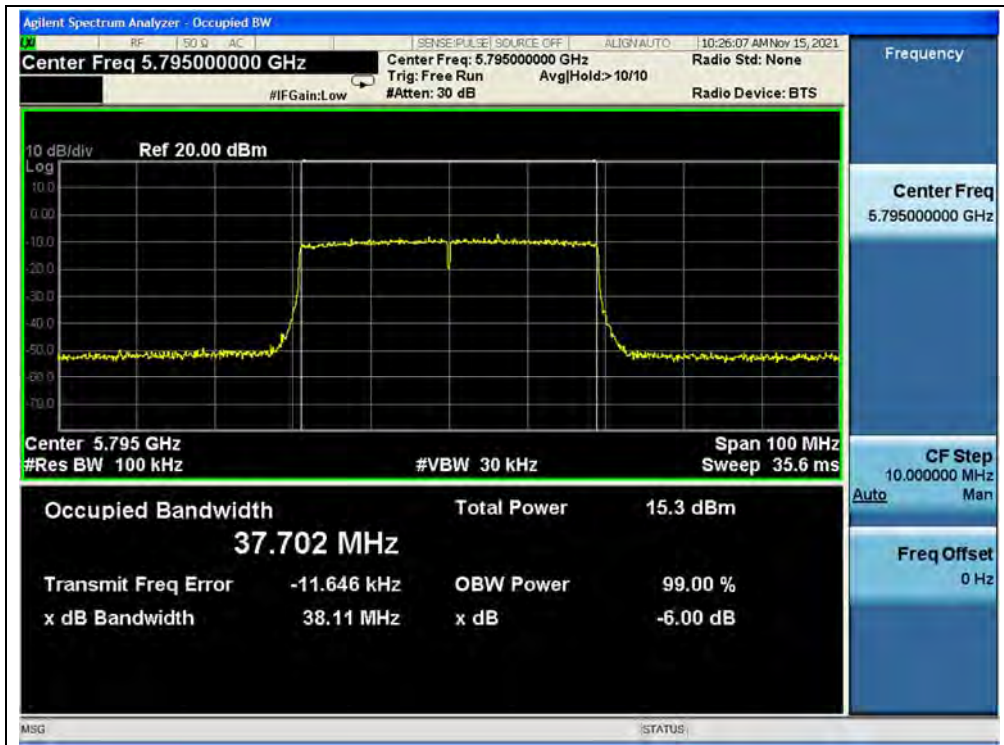

(Channel 159, 5795MHz, 802.11ax (HEW40))



802.11ax (HEW80) Mode


A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
42	5210	81.61
58	5290	80.72
106	5530	81.45
122	5610	81.15
138	5690	81.64
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
138	5690	78.03
155	5775	77.83

B. Test Plot:




(Channel 42, 5210MHz, 802.11ax (HEW80))

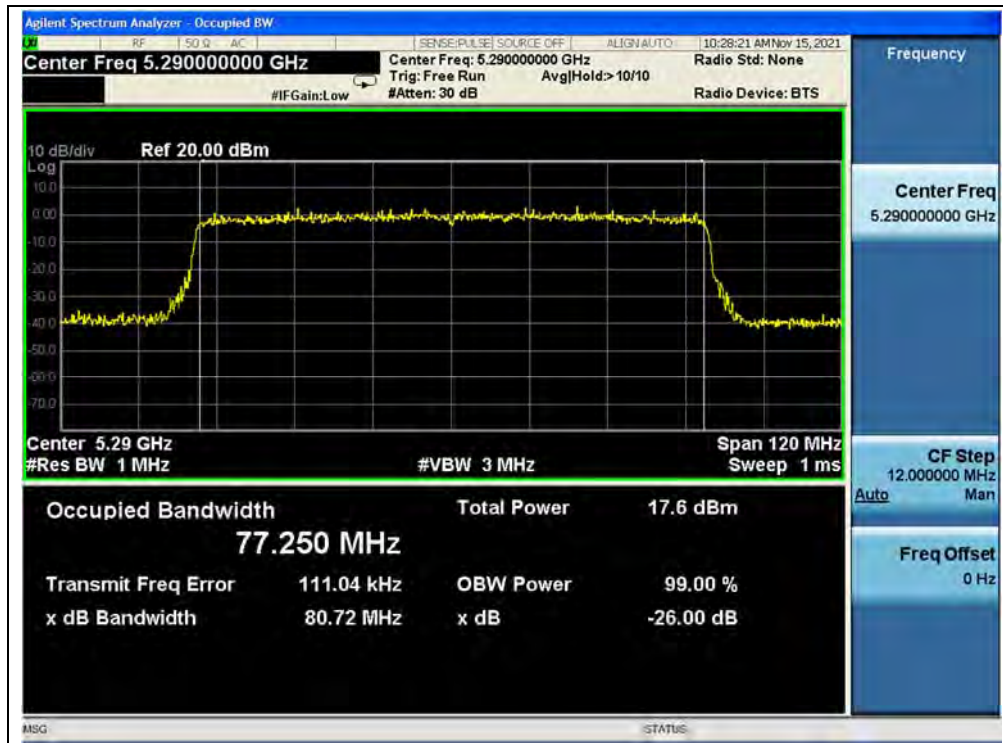

(Channel 58, 5290MHz, 802.11ax (HEW80))




(Channel 106, 5530MHz, 802.11ax (HEW80))

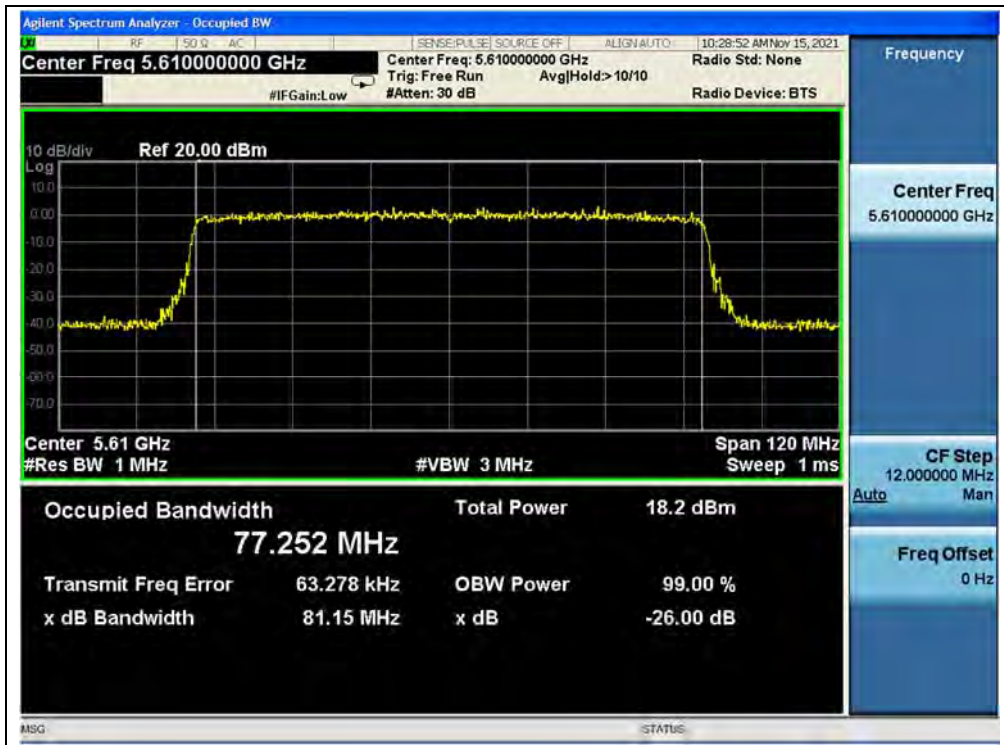


(Channel 122, 5610MHz, 802.11ax (HEW80))



(Channel 138, 5690MHz, 802.11ax (HEW80))

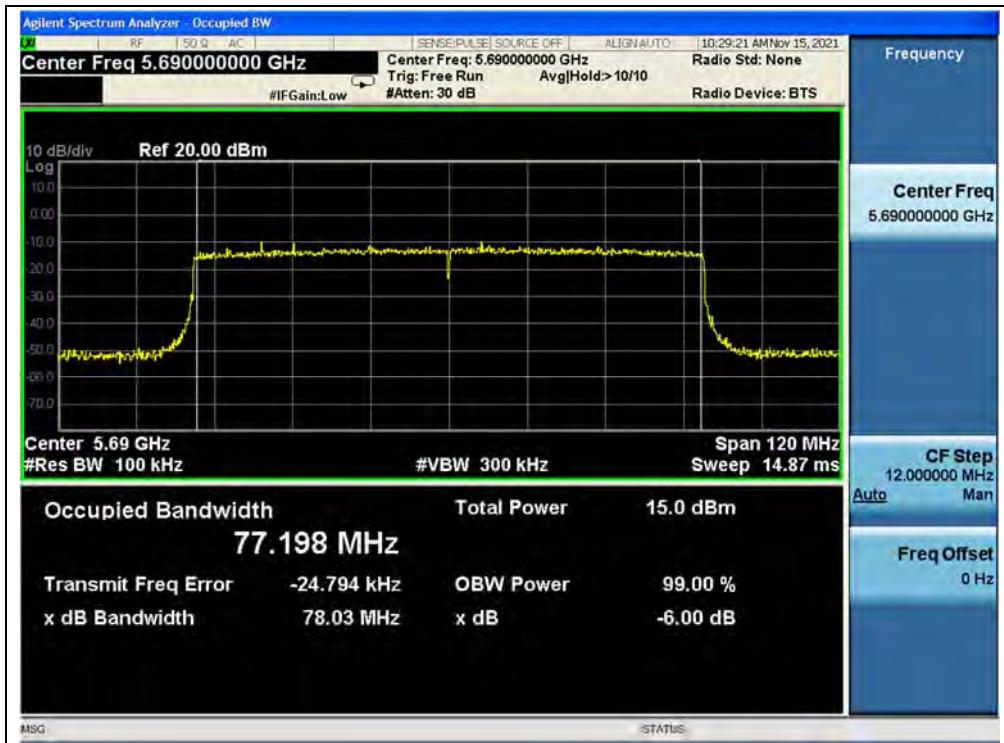

(Channel 138, 5690MHz, 802.11ax (HEW80))

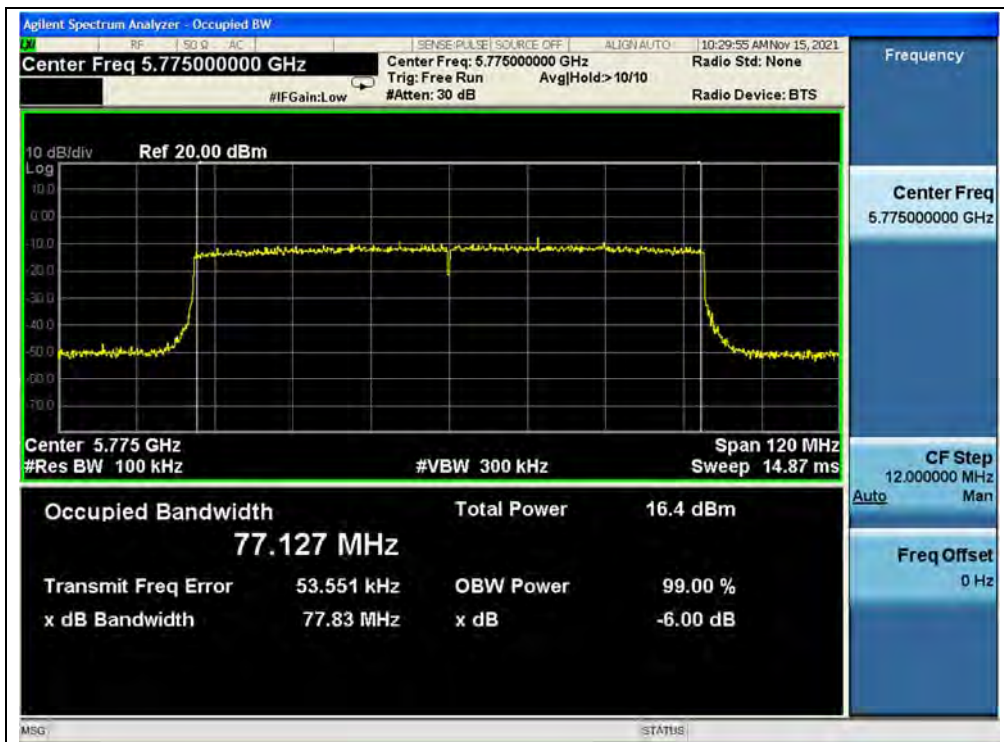

(Channel 155, 5775MHz, 802.11ax (HEW80))

2.5. Peak Power Spectral Density

2.5.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30dBm in any 500kHz band.


If transmitting antennas of directional gain greater than 6dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{ANT} + 10\log(N_{ANT})$ dBi, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

2.5.2. Test Description

Test Setup:

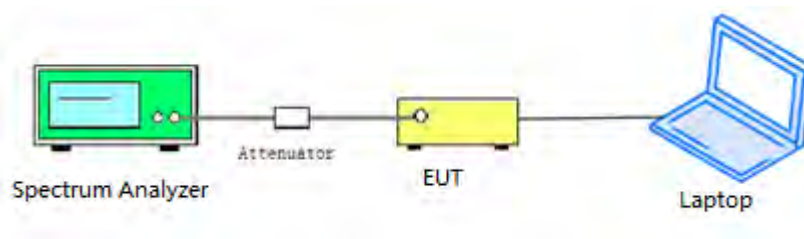

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.



2.5.3. Test Procedure

KDB 789033 Section F) Maximum Power Spectral Density (PSD) Method SA-3 was used in order to prove compliance

- 1) Set span to encompass the entire 26-dB emission bandwidth
- 2) Set RBW = 1MHz. Set VBW ≥ 3MHz
- 3) Number of points in sweep ≥ 2 Span / RBW. Sweep time = auto
- 4) Detector = Average
- 5) Trace mode=Max hold
- 6) Record the max value

2.5.4. Test Result

802.11a Mode

A.Test Verdict:

Frequency (MHz)	Measured PPSD (dBm/MHz)		Duty Factor	Corrected PPSD (dBm/MHz)		Limit (dBm/MHz)	Verdict
	ANT0	ANT1		ANT0	ANT1		
5180	4.88	3.55	0.04	4.88	3.55	11	PASS
5220	4.71	4.45		4.71	4.45		
5240	4.67	4.84		4.67	4.84		
5260	4.01	4.49		4.01	4.49		
5300	4.39	4.99		4.39	4.99		
5320	6.07	5.19		6.07	5.19		
5500	3.75	5.54		3.75	5.54		
5600	4.65	5.71		4.65	5.71		
5720	5.27	5.35		5.27	5.35		
Frequency (MHz)	Measured PPSD (dBm/500KHz)		Duty Factor	Total PPSD (dBm/500KHz)		Limit (dBm/500KHz)	Verdict
	ANT0	ANT1		ANT0	ANT1		
5720	2.38	2.54	0.04	2.38	2.54	30	PASS
5745	2.46	3.19		2.46	3.19		
5785	2.08	3.85		2.08	3.85		
5825	4.88	3.67		4.88	3.67		



B.Test Plot:



(Channel 36, 5180MHz, 802.11a, ANT0)



(Channel 44, 5220MHz, 802.11a, ANT0)




(Channel 48, 5240MHz, 802.11a, ANT0)



(Channel 52, 5260MHz, 802.11a, ANT0)



(Channel 60, 5300MHz, 802.11a, ANT0)

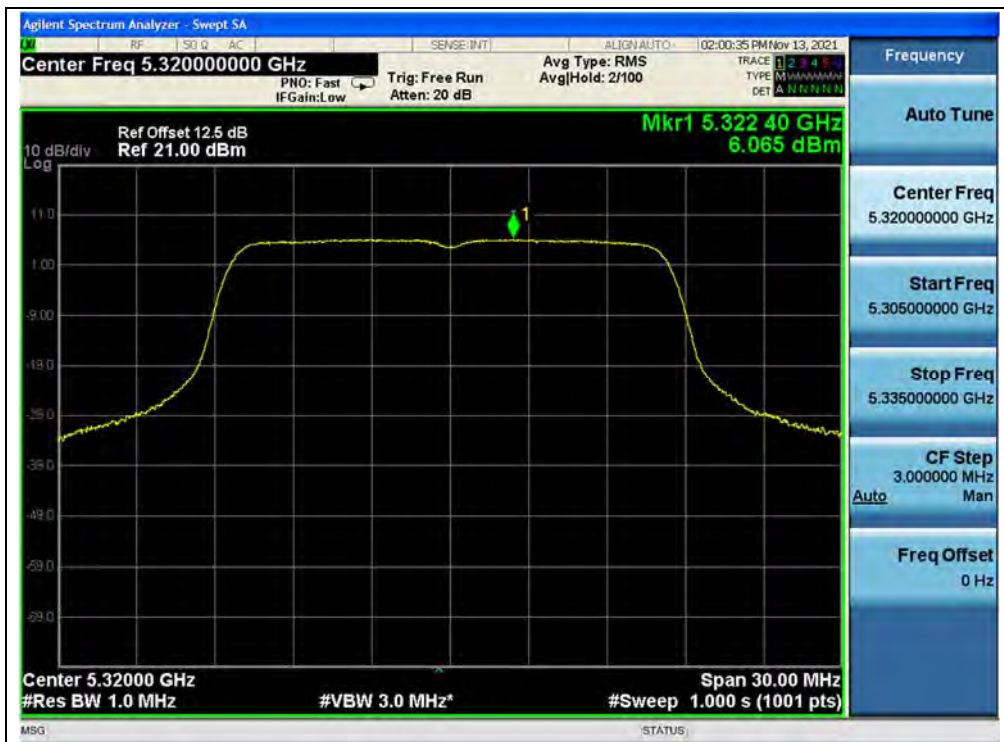

(Channel 64, 5320MHz, 802.11a, ANT0)



(Channel 100, 5500MHz, 802.11a, ANT0)



(Channel 120, 5600MHz, 802.11a, ANT0)




(Channel 144, 5720MHz, 802.11a, ANT0)



(Channel 144, 5720MHz, 802.11a, ANT0)



(Channel 149, 5745MHz, 802.11a, ANT0)

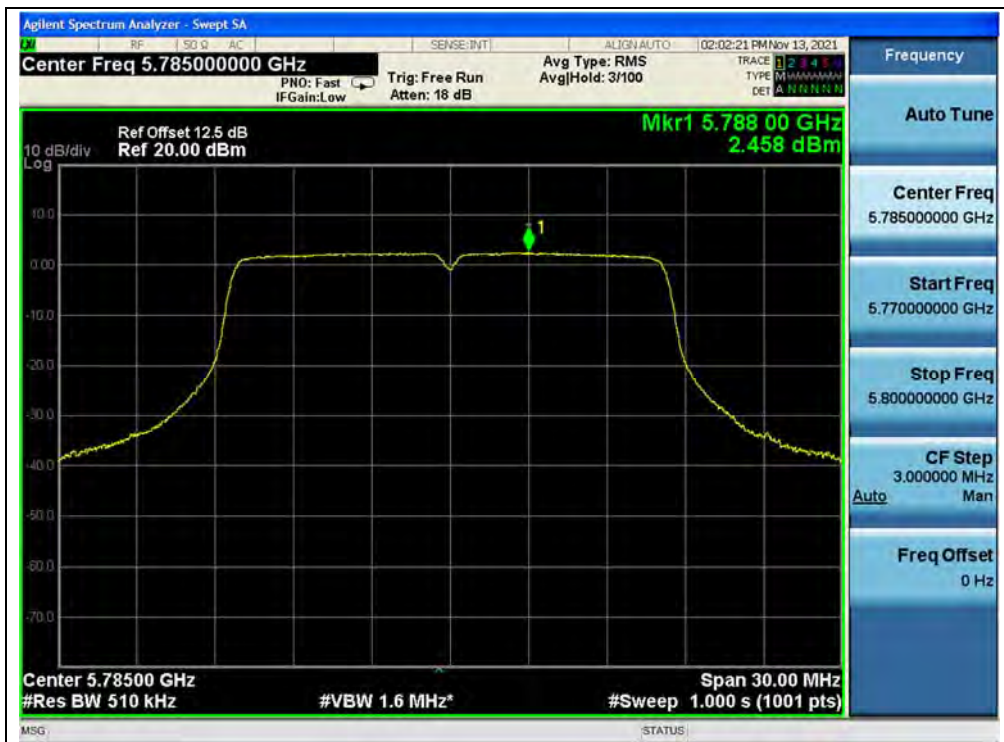

(Channel 157, 5785MHz, 802.11a, ANT0)



(Channel 165, 5825MHz, 802.11a, ANT0)



802.11n (HT20) Mode

A.Test Verdict:

Frequency (MHz)	Measured PPSD (dBm/MHz)		Duty Factor	Total PPSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
	ANT0	ANT1				
5180	4.33	3.08	0.02	6.78	11	PASS
5220	4.01	3.89		6.98		
5240	4.03	4.33		7.21		
5260	3.44	4.03		6.78		
5300	3.75	4.46		7.15		
5320	5.56	4.76		8.21		
5500	3.15	5.27		7.37		
5600	4.14	5.13		7.69		
5720	4.80	4.90		7.88		
Frequency (MHz)	Measured PPSD (dBm/500KHz)		Duty Factor	Total PPSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
	ANT0	ANT1				
5720	1.97	1.95	0.02	4.99	30	PASS
5745	1.88	2.78		5.38		
5785	2.01	3.41		5.80		
5825	1.65	3.21		5.53		
<p>Note: Directional gain = 0.50dBi + 10log(2) = 3.51dBi < 6dBi, so the limit shall be 11dBm/MHz for 5.18-5.24GHz, 5.260-5.320GHz, 5.500-5.720GHz band and 30dBm/500KHz for 5.745-5.825GHz band.</p>						



B.Test Plot:



(Channel 36, 5180MHz, 802.11n (HT20), ANT0)



(Channel 44, 5220MHz, 802.11n (HT20), ANT0)