



TEST REPORT

APPLICANT : Nubia Technology Co., Ltd.
PRODUCT NAME : 5G Mobile Phone
MODEL NAME : NX709J
BRAND NAME : REDMAGIC
FCC ID : 2AHJO-NX709J
STANDARD(S) : 47 CFR Part 15 Subpart E
RECEIPT DATE : 2022-01-25
TEST DATE : 2022-01-29 to 2022-03-18
ISSUE DATE : 2022-03-30

Edited by: Peng Mi
Peng Mi (Rapporteur)

Approved by: Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

- 1. Technical Information 3**
- 1.1. Applicant and Manufacturer Information 3**
- 1.2. Equipment Under Test (EUT) Description 3**
- 1.3. Modulation Type and Data Rate of EUT 5**
- 1.4. The Channel Number and Frequency 6**
- 1.5. Test Standards and Results 7**
- 1.6. Environmental Conditions 8**
- 2. 47 CFR Part 15E Requirements 9**
- 2.1. Antenna Requirement 9**
- 2.2. Duty Cycle of the Test Signal 10**
- 2.3. Maximum Conducted Output Power 16**
- 2.4. Emission Bandwidth 25**
- 2.5. Peak Power Spectral Density 88**
- 2.6. Frequency Stability 155**
- 2.7. Conducted Emission 158**
- 2.8. Restricted Frequency Bands 162**
- 2.9. Radiated Emission 191**
- Annex A Test Uncertainty 246**
- Annex B Testing Laboratory Information 247**

Change History		
Version	Date	Reason for change
1.0	2022-03-30	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Nubia Technology Co., Ltd.
Applicant Address:	Room 1801, Building 2, Chongwen Park, Nanshan Zhiyuan, No.3370, Liuxian Rd, Nanshan District, Shenzhen City, Guangdong Province, P. R. China
Manufacturer:	Nubia Technology Co., Ltd.
Manufacturer Address:	Room 1801, Building 2, Chongwen Park, Nanshan Zhiyuan, No.3370, Liuxian Rd, Nanshan District, Shenzhen City, Guangdong Province, P. R. China

1.2. Equipment Under Test (EUT) Description

Product Name:	5G Mobile Phone
Sample No.:	5#
Hardware Version:	NX709J_V1AMB
Software Version:	NX709J_UNCommon_V4.01
Modulation Technology:	OFDM, OFDMA
Modulation Mode:	802.11a, 802.11n (HT20), 802.11n (HT40) 802.11ac (VHT20), 802.11ac (VHT40), 802.11ac (VHT80) 802.11ax (HEW20), 802.11ax (HEW40),802.11ax (HEW80)
Operating Frequency Range:	5180MHz-5240MHz; 5260MHz-5320MHz; 5500MHz-5720MHz; 5745MHz-5825MHz
Channel Number:	Refer to 1.3
Antenna Type:	PIFA Antenna
Antenna Gain:	ANT 0: 0.50dBi; ANT 1: -0.50dBi
Directional Gain:	3.51dBi _{Note 2}



Accessory Information:	Battery	
	Brand Name:	nubia
	Model No.:	Li3923T89P8h636590
	Serial No.:	N/A
	Capacity:	2380mAh
	Rated Voltage:	7.78V
	Charge Limit:	8.96V
	Manufacturer:	Dongguan Amperex Technology Limited
	AC Adapter	
	Brand Name:	nubia
	Model No.:	STC-A59152050AC-Z
	Serial No.:	N/A
	Rated Output:	5.0V=3.0A, 9.0V=3.0A, 15.0V=3.0A, 20.0V=3.0A PPS:5.0V-11.0V=5.0A, 5.0V-20.0V=3.25A
	Rated Input:	100-240V~50/60Hz, 1.5A
	Manufacturer:	ShenZhen KunXing Technology Co., Ltd.
	USB Cable	
Model No.:	N52111200016D	

Note 1: The EUT supports a MIMO function. Physically, the EUT provides two completed transmitters and two receivers for 802.11n, 802.11ac and 802.11ax modulation mode.

Modulation Mode:	TX Function
802.11n	2TX
802.11ac	2TX
802.11ax	2TX

Note 2: According to KDB 662911 D01, the directional gain = $G_{ANT} + 10\log(N_{ANT})$ dBi, where G_{ANT} is the maximum antenna gain in dBi, N_{ANT} is the number of outputs.

Note 3: For conducted test item Conducted Output Power and Peak Power Spectral Density of each modulation mode, we recorded the test result of two antennas separately, for other conducted test items both of the two antennas were tested separately, we only recorded the worst test result (ANT0) in this report.

Note 4: All radiation test items for 802.11n, 802.11ac and 802.11ax modulation mode operate at MIMO mode during the test. Other modulation mode operate at SISO mode, both of the two antennas were tested separately, we only recorded the worst test result(ANT0) in this report.

Note 5: WIFI hotspot does not support U-NII band.

Note 6: We use the dedicated software to control the EUT continuous transmission.

Note 7: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.3. Modulation Type and Data Rate of EUT

Mode	Bandwidth (MHz)	Modulation Technology	Modulation Type	Data Rate	RU Size
802.11a	20	OFDM	DBPSK	1/2/5.5/11Mbps	NA
			DQPSK		
			CCK		
802.11n	20/40 (HT20/40)	OFDM	BPSK	MCS0~MCS7	NA
			QPSK		
			16QAM		
			64QAM		
802.11ac	20/40/80 (VHT20/40/80)	OFDM	BPSK	MSC0~MCS9	NA
			QPSK		
			16QAM		
			64QAM		
			256QAM		
802.11ax	20/40/80 (HEW20/40/80)	OFDMA	BPSK	MSC0~MCS11	26/52/106/242/484/996
			QPSK		
			16QAM		
			64QAM		
			256QAM		
			1024QAM		

Note1: The worst-case mode(black bold) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.

1.4. The Channel Number and Frequency

(U-NII-1) 5180MHz-5240MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	36	5180	40	5200
	44	5220	48	5240
40MHz	38	5190	46	5230
80MHz	42	5210		
(U-NII-2A) 5260MHz-5320MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	52	5260	56	5280
	60	5300	64	5320
40MHz	54	5270	62	5310
80MHz	58	5290		
(U-NII-2C) 5500MHz-5720MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	100	5500	105	5520
		108	112	5560
		116	120	5600
		124	128	5640
		132	136	5680
		140	144	5720
40MHz	102	5510	110	5550
		118	126	5630
		134	142	5710
80MHz	106	5530	122	5610
	138	5690		
(U-NII-3) 5745MHz-5825MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	149	5745	153	5765
	157	5785	161	5805
	165	5825		
40MHz	151	5775	159	5795
80MHz	155	5775		

Note 1: The black bold channels were selected for test.



1.5. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart E (U-NII band) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15(5-1-14 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	ANSI C63.10	Duty Cycle of the Test Signal	Feb. 14, 2022	Su Xiaoxian	PASS	No deviation
3	15.407(a)	Maximum Conducted Output Power	Mar. 05, 2022	Su Xiaoxian	PASS	No deviation
4	15.407(a)(e)	Emission Bandwidth	Feb. 15, 2022 Mar. 02, 2022	Su Xiaoxian	PASS	No deviation
5	15.407(a)	Peak Power Spectral Density	Feb. 15, 2022 Mar. 02, 2022	Su Xiaoxian	PASS	No deviation
6	15.407(g)	Frequency Stability	Mar. 05, 2022	Su Xiaoxian	PASS	No deviation
7	15.207	Conducted Emission	Feb. 14, 2022	Zhang Bangyi	PASS	No deviation
8	15.407(b)	Restricted Frequency Bands	Jan. 29, 2022 Mar. 08 to 13, 2022	Gao Jianrou	PASS	No deviation
9	15.407(b)	Radiated Emission	Mar. 18, 2022	Gao Jianrou	PASS	No deviation

Note 1: The DFS test report was documented in a separate report (Report No.: SZ21120450W05).

Note 2: The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.102013.

Note 3: These RF tests were performed according to the method of measurements prescribed in KDB789033 D02 v02r01.



Note 4: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The ref offset 12.0dB contains two parts that cable loss 2.0dB and Attenuator 10dB.

Note 5: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 6: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

1.6. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



2. 47 CFR Part 15E Requirements

2.1. Antenna Requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Test Result: Compliant

Inside of the EUT has a PIFA antenna coupled with the I-PEX connector. Please refer to the EUT internal photos.

2.2. Duty Cycle of the Test Signal


2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be nonconstant.

2.2.2. Test Description

Test Setup:

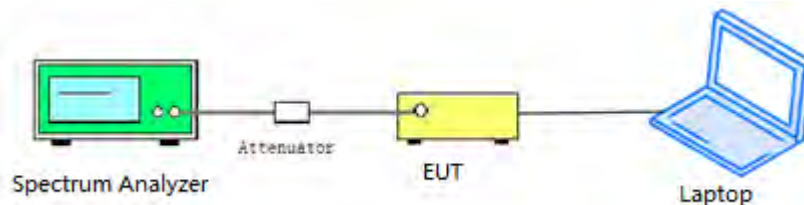

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.2.3. Test Procedure

KDB 789033 Section B was used in order to prove compliance.




2.2.4. Test Result


A. Test Verdict:

Test Mode	Duty Cycle (%) (D)	Duty Factor (10*log[1/D])
802.11a	99.12	0.04
802.11n(HT20)	98.88	0.05
802.11n(HT40)	99.02	0.04
802.11ac(VHT20)	99.16	0.04
802.11ac(VHT40)	99.16	0.04
802.11ac(VHT80)	98.88	0.05
802.11ax(HEW20)	98.94	0.05
802.11ax(HEW40)	99.09	0.04
802.11ax(HEW80)	98.94	0.05


B. Test Plot:

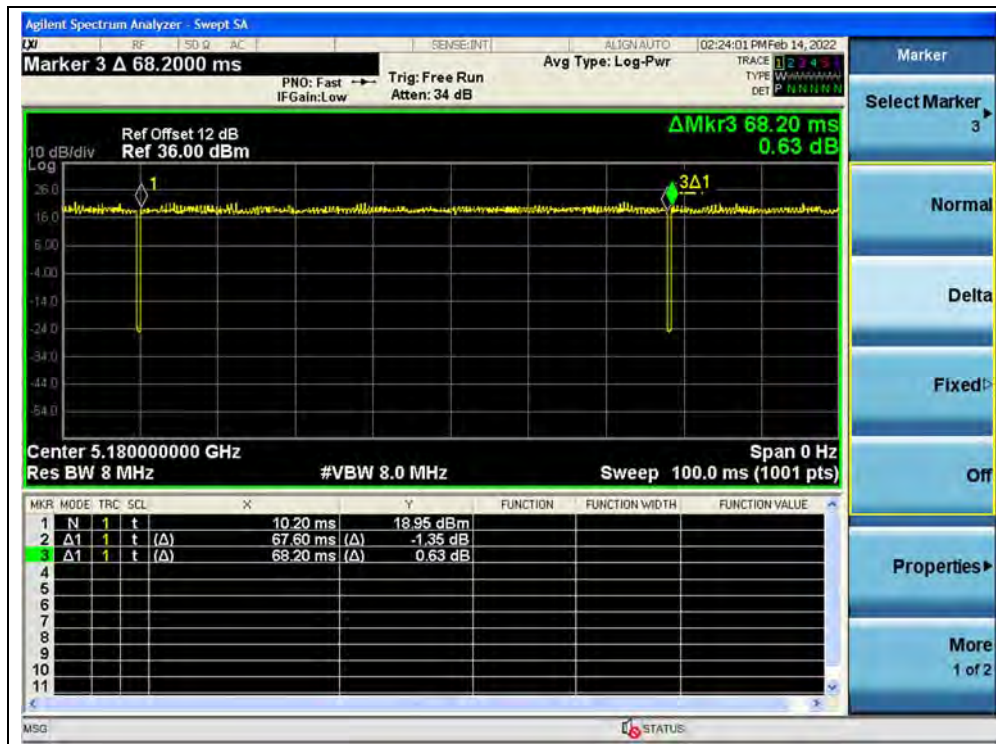


(Channel 36, 5180MHz, 802.11a)

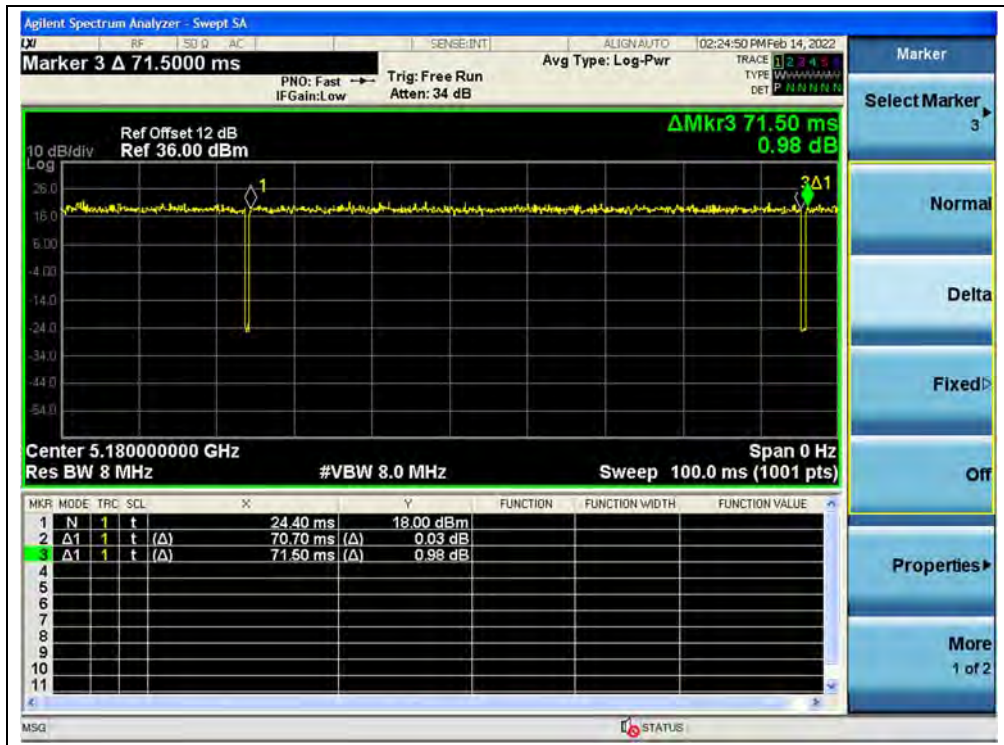


(Channel 36, 5180MHz, 802.11n (HT20))

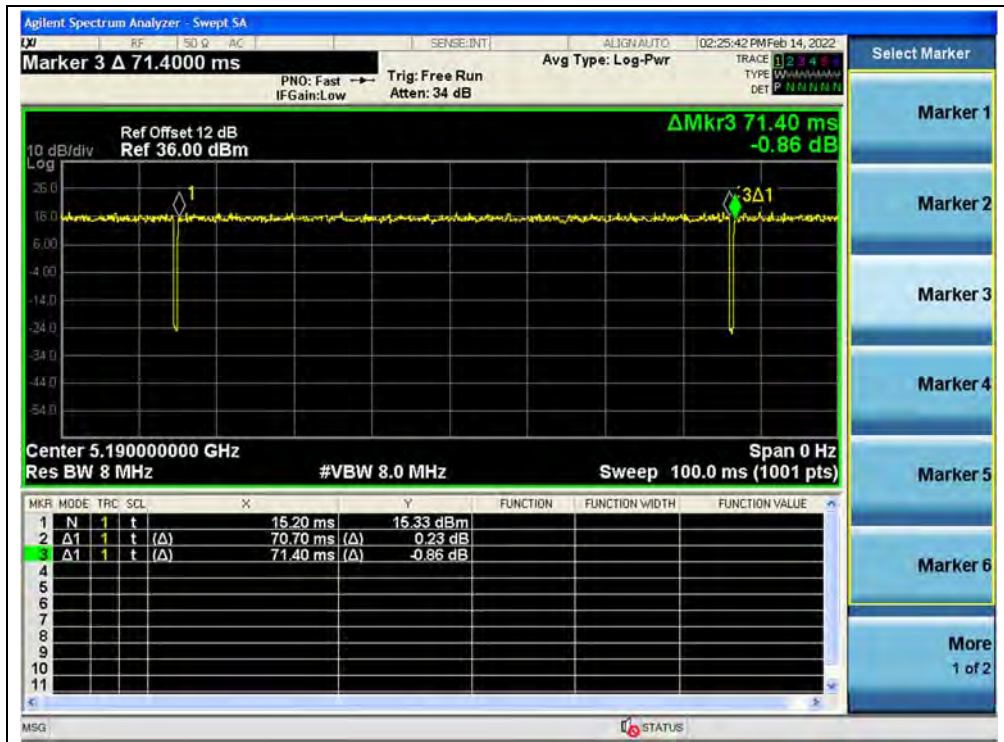


(Channel 38, 5190MHz, 802.11n (HT40))

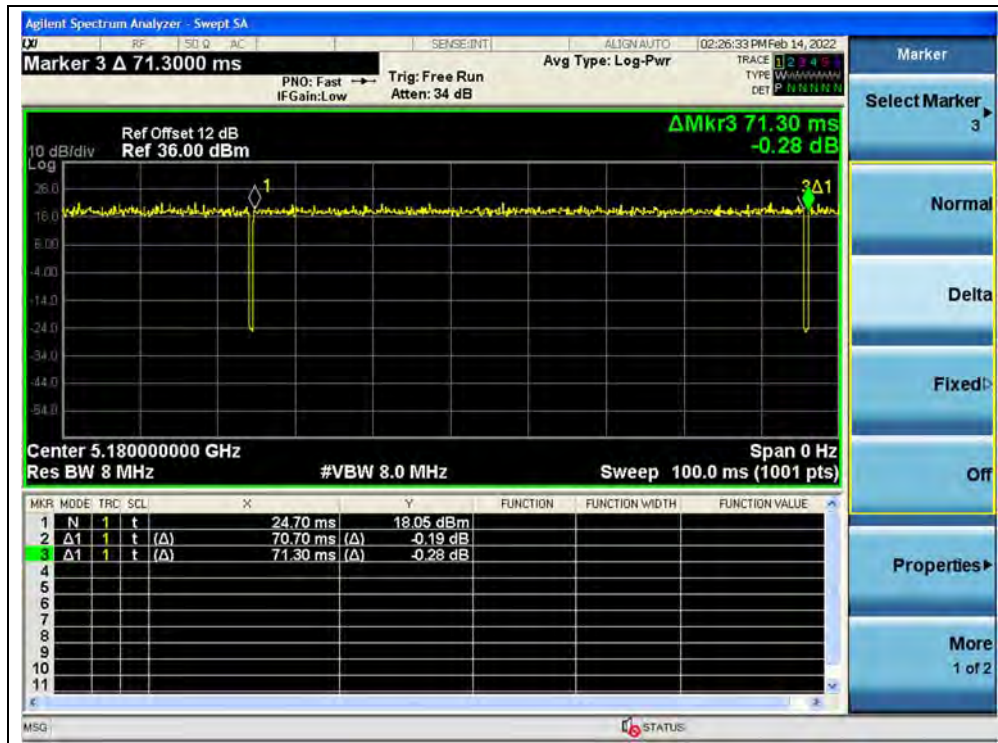


(Channel 36, 5180MHz, 802.11ac (VHT20))

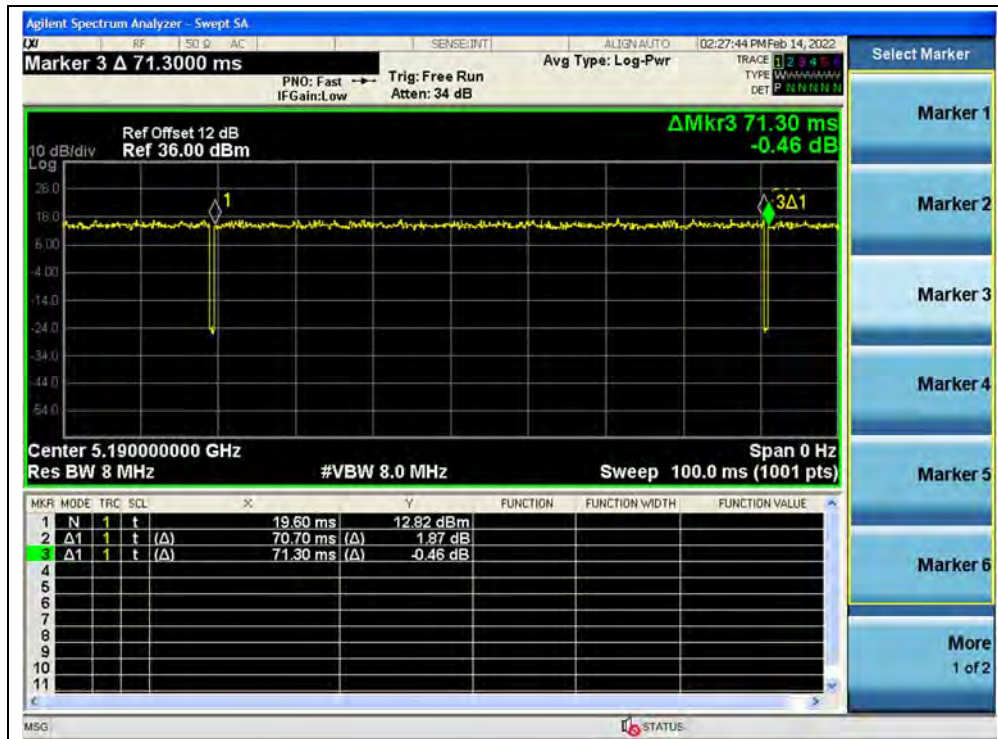


(Channel 38, 5190MHz, 802.11ac (VHT40))

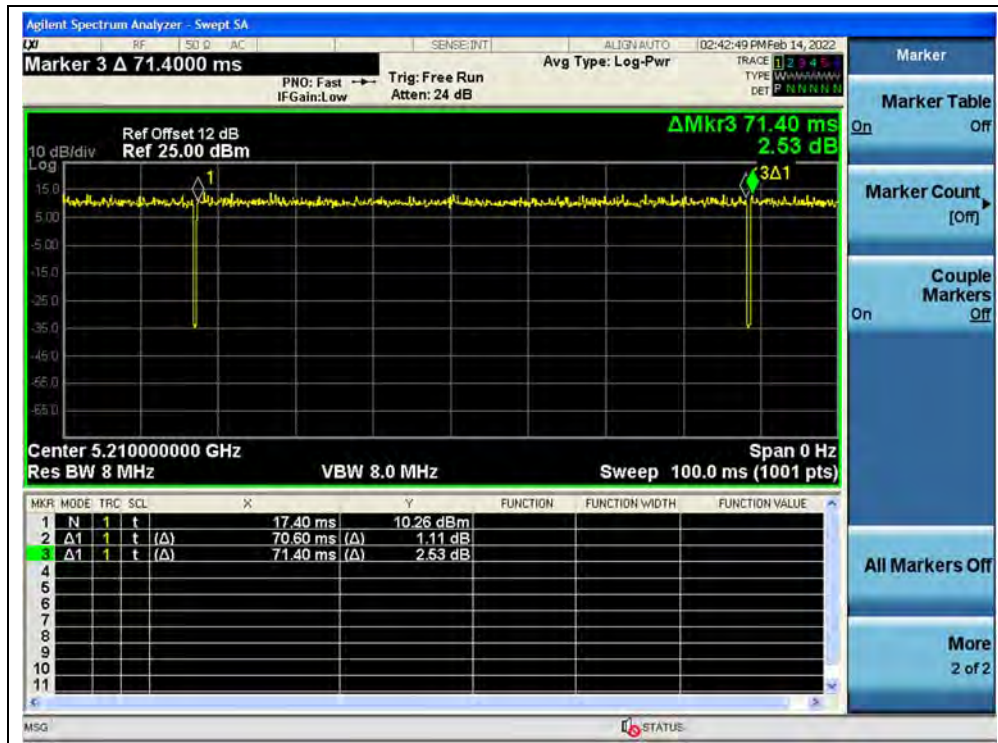


(Channel 42, 5210MHz, 802.11ac (VHT80))

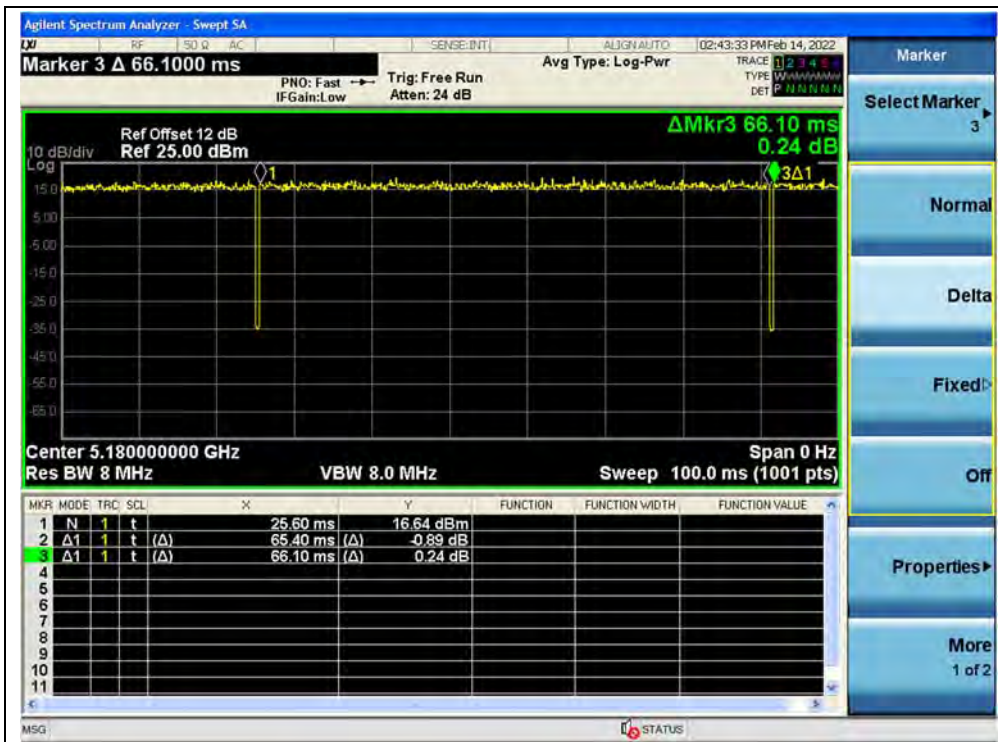

(CH36, 5180MHz, 802.11ax (HEW20))

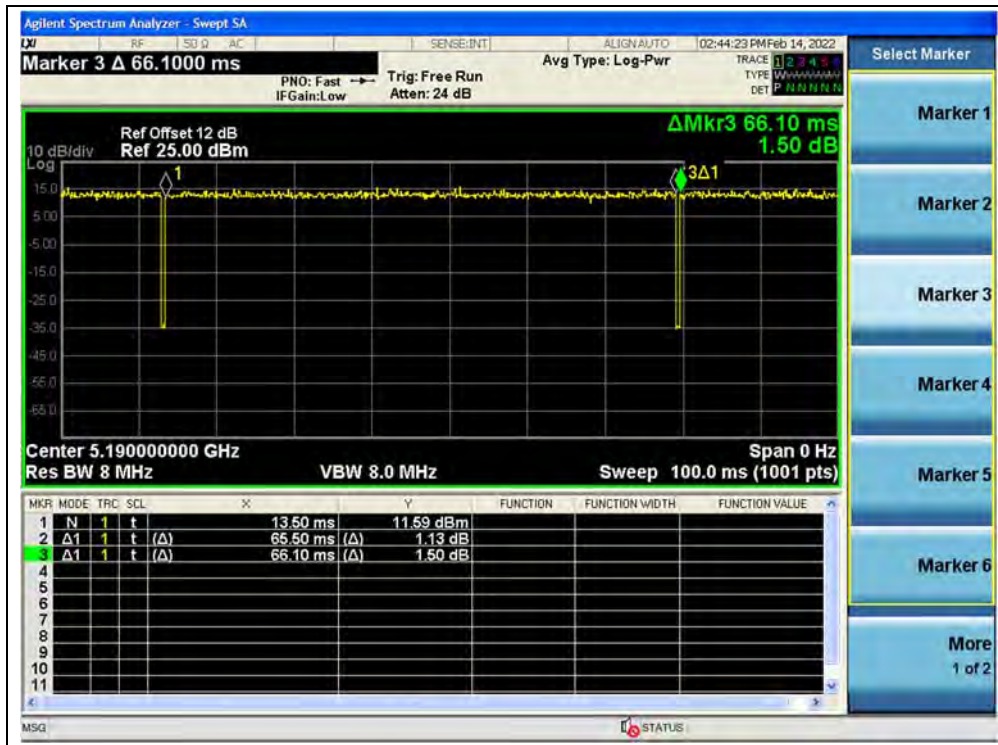

(CH38, 5190MHz, 802.11ax (HEW40))

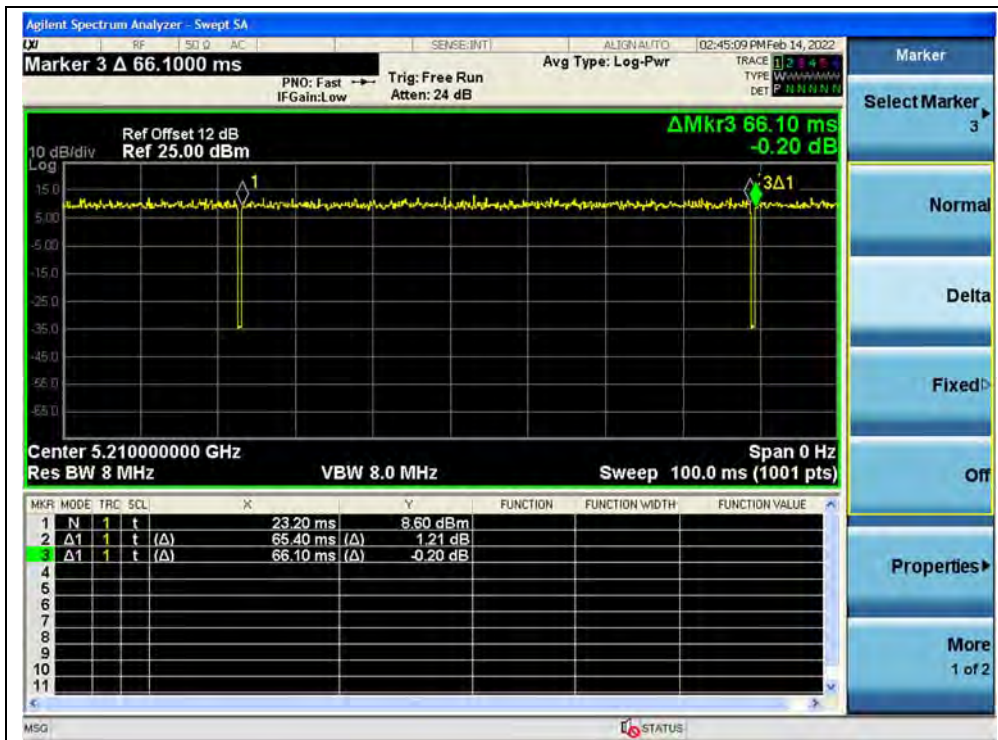

(CH42, 5210MHz, 802.11ax (HEW80))

2.3. Maximum Conducted Output Power

2.3.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{\text{ANT}} + 10\log(N_{\text{ANT}})\text{dBi}$, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.


2.3.2. Test Description

Section E) 3) of KDB 789033 defines a methodology using a USB Wideband Power Sensor.

Test Setup:

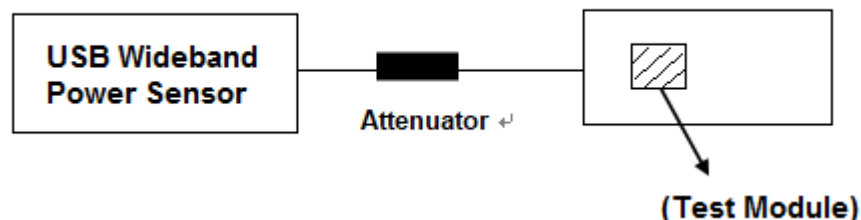

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in USB Wideband Power Sensor.

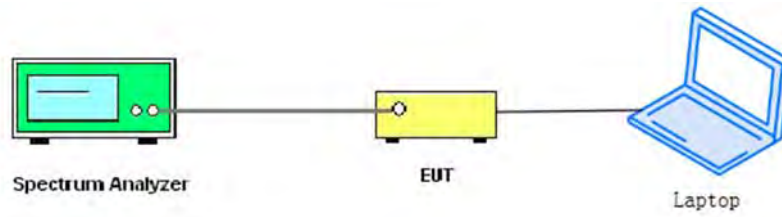For ac (VHT80) mode power

The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.



2.3.3. Limits

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz.

Mode	Band	Channel (MHz)	26dB BW (MHz)	10+10log(26dB BW)	Limits (dBm)
a	UNII-2a	5260	19.15	23.82	23.82
		5300	19.30	23.86	23.86
		5320	19.22	23.84	23.84
	UNII-2c	5500	19.11	23.81	23.81
		5600	19.20	23.83	23.83
		5720	19.32	23.86	23.86
n20	UNII-2a	5260	20.31	24.08	24.00
		5300	20.38	24.09	24.00
		5320	20.65	24.15	24.00
	UNII-2c	5500	20.29	24.07	24.00
		5600	20.58	24.13	24.00
		5720	20.62	24.14	24.00
ac20	UNII-2a	5260	20.13	24.04	24.00
		5300	20.37	24.09	24.00
		5320	20.22	24.06	24.00
	UNII-2c	5500	20.30	24.07	24.00
		5600	20.65	24.15	24.00
		5720	20.42	24.10	24.00
ax20	UNII-2a	5260	20.97	24.22	24.00
		5300	20.83	24.19	24.00
		5320	20.91	24.20	24.00
	UNII-2c	5500	20.75	24.17	24.00
		5600	20.81	24.18	24.00
		5720	20.95	24.21	24.00
ax_RU26	UNII-2a	5260	20.51	24.12	24.00
		5300	20.45	24.11	24.00
		5320	20.53	24.12	24.00
	UNII-2c	5500	20.78	24.18	24.00
		5600	21.08	24.24	24.00
		5720	21.14	24.25	24.00



2.3.4. Test Result

Maximum Average Conducted Output Power
802.11a Mode

Frequency (MHz)	Average Power							Limit		Verdict
	Measured		Duty Factor	Duty Factor Calculated						
	ANT0	ANT1		ANT0		ANT1				
	dBm	dBm		dBm	W	dBm	W	dBm	W	
5180	12.89	12.12	0.04	12.93	0.020	12.16	0.016	24	0.25	PASS
5220	12.24	11.88		12.28	0.017	11.92	0.016			
5240	12.05	12.28		12.09	0.016	12.32	0.017			
5260	12.03	12.21		12.07	0.016	12.25	0.017	23.82	0.24	PASS
5300	12.27	12.51		12.31	0.017	12.55	0.018	23.86	0.24	
5320	12.23	12.66		12.27	0.017	12.70	0.019	23.84	0.24	
5500	12.84	12.51		12.88	0.019	12.55	0.018	23.81	0.24	
5600	12.62	12.59		12.66	0.018	12.63	0.018	23.83	0.24	
5720	12.24	12.05		12.28	0.017	12.09	0.016	23.86	0.24	
5745	12.56	12.05		12.60	0.018	12.09	0.016	30	1	
5785	12.58	11.68		12.62	0.018	11.72	0.015			
5825	12.56	11.48		12.60	0.018	11.52	0.014			



802.11n (HT20) Mode

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor		dBm		W
	ANT0	ANT1		dBm	W			
5180	12.90	11.96	0.05	15.56	0.036	24	0.25	PASS
5220	12.19	12.12		15.19	0.033			
5240	12.03	12.15		15.19	0.033			
5260	12.01	12.28		15.19	0.033			
5300	12.22	12.55		15.44	0.035			
5320	12.22	12.75		15.56	0.036			
5500	12.85	12.48		15.68	0.037			
5600	12.68	12.66		15.68	0.037			
5720	12.26	12.01		15.19	0.033			
5745	12.59	11.97		15.31	0.034	30	1	
5785	12.59	11.58		15.19	0.033			
5825	12.59	11.45		15.05	0.032			

Note: Directional gain = 0.50dBi + 10log(2) = 3.51dBi < 6dBi, so the power limit shall be 24dBm for 5.18-5.24 GHz, 5.260-5.320GHz, 5.500-5.720GHz band and 30dBm for 5.745-5.825 GHz band.

802.11n (HT40) Mode

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor		dBm		W
	ANT0	ANT1		dBm	W			
5190	12.98	12.15	0.04	15.68	0.037	24	0.25	PASS
5230	12.26	12.31		15.31	0.034			
5270	12.24	12.36		15.31	0.034			
5310	12.16	12.81		15.56	0.036			
5510	13.03	12.13		15.68	0.037			
5630	12.45	12.25		15.44	0.035			
5710	12.38	12.08		15.31	0.034			
5755	13.06	11.97		15.56	0.036	30	1	
5795	13.03	11.70		15.44	0.035			

Note: Directional gain = 0.50dBi + 10log(2) = 3.51dBi < 6dBi, so the power limit shall be 24dBm for 5.18-5.24 GHz, 5.260-5.320GHz, 5.500-5.720GHz band and 30dBm for 5.745-5.825 GHz band.



802.11ac (VHT20) Mode

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor		dBm		W
	ANT0	ANT1		dBm	W			
5180	11.44	10.17	0.04	13.98	0.025	24	0.25	PASS
5220	10.97	10.96		13.98	0.025			
5240	10.84	11.08		13.98	0.025			
5260	10.81	11.18		13.98	0.025			
5300	11.18	11.52		14.47	0.028			
5320	11.02	11.72		14.47	0.028			
5500	11.71	11.25		14.47	0.028			
5600	11.58	11.44		14.62	0.029			
5720	11.17	11.06		14.15	0.026			
5745	11.49	11.15		14.31	0.027			
5785	11.54	10.78		14.15	0.026			
5825	11.62	10.84		14.31	0.027			

Note: Directional gain = 0.50dBi + 10log(2) = 3.51dBi < 6dBi, so the power limit shall be 24dBm for 5.18-5.24 GHz, 5.260-5.320GHz, 5.500-5.720GHz band and 30dBm for 5.745-5.825 GHz band.

802.11ac (VHT40) Mode

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor		dBm		W
	ANT0	ANT1		dBm	W			
5190	10.72	9.39	0.04	13.22	0.021	24	0.25	PASS
5230	10.24	9.49		13.01	0.020			
5270	10.18	10.19		13.22	0.021			
5310	10.22	10.60		13.42	0.022			
5510	10.80	9.81		13.42	0.022			
5630	10.61	9.56		13.22	0.021			
5710	10.51	9.28		13.01	0.020			
5755	10.84	9.10		13.01	0.020	30	1	
5795	10.62	9.02		13.01	0.020			

Note: Directional gain = 0.50dBi + 10log(2) = 3.51dBi < 6dBi, so the power limit shall be 24dBm for 5.18-5.24 GHz, 5.260-5.320GHz, 5.500-5.720GHz band and 30dBm for 5.745-5.825 GHz band.



802.11ac (VHT80) Mode

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1		W	dBm	dBm		W
5210	10.76	9.68	0.05	13.22	0.021	24	0.25	PASS
5290	10.66	10.46		13.62	0.023			
5530	10.86	9.77		13.42	0.022			
5610	11.04	10.57		13.80	0.024			
5690	10.85	9.28		13.22	0.021			
5775	11.20	8.99		13.22	0.021	30	1	

Note: Directional gain = 0.50dBi + 10log(2) = 3.51dBi < 6dBi, so the power limit shall be 24dBm for 5.18-5.24 GHz, 5.260-5.320GHz, 5.500-5.720GHz band and 30dBm for 5.745-5.825 GHz band.

802.11ax (HEW20) Mode

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1		dBm	W	dBm		W
5180	11.39	10.67	0.05	14.15	0.026	24	0.25	PASS
5220	10.79	11.43		14.15	0.026			
5240	10.60	11.39		14.15	0.026			
5260	10.76	11.61		14.31	0.027			
5300	11.06	11.84		14.47	0.028			
5320	11.12	11.98		14.62	0.029			
5500	11.70	11.20		14.47	0.028			
5600	11.49	10.55		14.15	0.026			
5720	11.15	10.61		13.98	0.025			
5745	11.40	10.21		13.98	0.025			
5785	11.42	10.63		14.15	0.026			
5825	11.48	10.77		14.15	0.026			

Note: Directional gain = 0.50dBi + 10log(2) = 3.51dBi < 6dBi, so the power limit shall be 24dBm for 5.18-5.24 GHz, 5.260-5.320GHz, 5.500-5.720GHz band and 30dBm for 5.745-5.825 GHz band.



802.11ax (HEW20)(RU26) Mode

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor		dBm		W
	ANT0	ANT1		dBm	W			
	dBm	dBm						
5180	9.46	8.12	0.05	11.76	0.015	24	0.25	PASS
5220	9.05	7.88		11.46	0.014			
5240	9.11	7.95		11.76	0.015			
5260	8.98	8.01		11.46	0.014			
5300	9.21	8.27		11.76	0.015			
5320	9.33	8.33		12.04	0.016			
5500	9.74	8.41		12.30	0.017			
5600	9.61	8.12		12.04	0.016			
5720	9.50	8.04		11.76	0.015			
5745	9.58	8.05		12.04	0.016			
5785	9.66	8.11		12.04	0.016			
5825	9.73	8.00		12.04	0.016			

Note: Directional gain = 0.50dBi + 10log(2) = 3.51dBi < 6dBi, so the power limit shall be 24dBm for 5.18-5.24 GHz, 5.260-5.320GHz, 5.500-5.720GHz band and 30dBm for 5.745-5.825 GHz band.



802.11ax (HEW40) Mode

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1		dBm	W	dBm		W
5190	10.56	9.65	0.04	13.22	0.021	24	0.25	PASS
5230	10.04	9.65		12.79	0.019			
5270	9.82	10.05		13.01	0.020			
5310	9.91	10.44		13.22	0.021			
5510	10.68	9.65		13.22	0.021			
5630	10.47	9.39		13.01	0.020			
5710	10.33	9.08		12.79	0.019			
5755	10.75	8.91		13.01	0.020	30	1	
5795	10.63	8.35		12.79	0.019			

Note: Directional gain = 0.50dBi + 10log(2) = 3.51dBi < 6dBi, so the power limit shall be 24dBm for 5.18-5.24 GHz, 5.260-5.320GHz, 5.500-5.720GHz band and 30dBm for 5.745-5.825 GHz band.

802.11ax (HEW80) Mode

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1		W	dBm	dBm		W
5210	10.70	9.86	0.05	13.42	0.022	24	0.25	PASS
5290	10.58	10.50		13.62	0.023			
5530	10.92	9.74		13.42	0.022			
5610	11.22	10.48		13.98	0.025			
5690	10.91	9.24		13.22	0.021			
5775	11.25	8.85		13.22	0.021	30	1	

Note: Directional gain = 0.50dBi + 10log(2) = 3.51dBi < 6dBi, so the power limit shall be 24dBm for 5.18-5.24 GHz, 5.260-5.320GHz, 5.500-5.720GHz band and 30dBm for 5.745-5.825 GHz band.


2.4. Emission Bandwidth

2.4.1. Requirement

For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement. Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

2.4.2. Test Description

Test Setup:

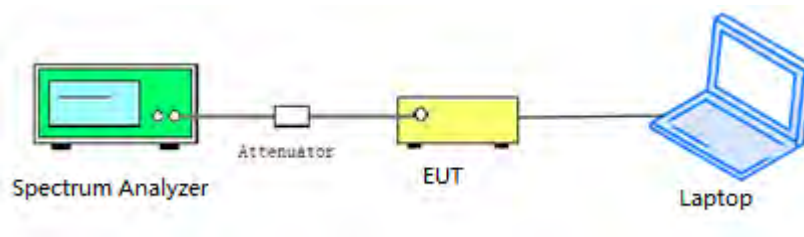

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

2.4.3. Test Procedure

1. KDB 789033 Section C) 1) Emission Bandwidth was used in order to prove compliance
 - a) Set RBW = approximately 1% of the emission bandwidth.
 - b) Set VBW > RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
2. KDB 789033 Section C) 2) minimum emission bandwidth for the band 5.725-5.85GHz was used in order to prove compliance.
Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:



- a) Set RBW = 100 kHz.
- b) Set video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

2.4.4. Test Result

802.11a Mode

A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	19.32
44	5220	19.12
48	5240	19.04
52	5260	19.15
60	5300	19.30
64	5320	19.22
100	5500	19.11
120	5600	19.20
144	5720	19.32
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
144	5720	16.33
149	5745	16.34
157	5785	16.30
165	5825	16.34



B.Test Plot:



(Channel 36, 5180MHz, 802.11a)




(Channel 44, 5220 MHz, 802.11a)



(Channel 48, 5240MHz, 802.11a)



(Channel 52, 5260MHz, 802.11a)

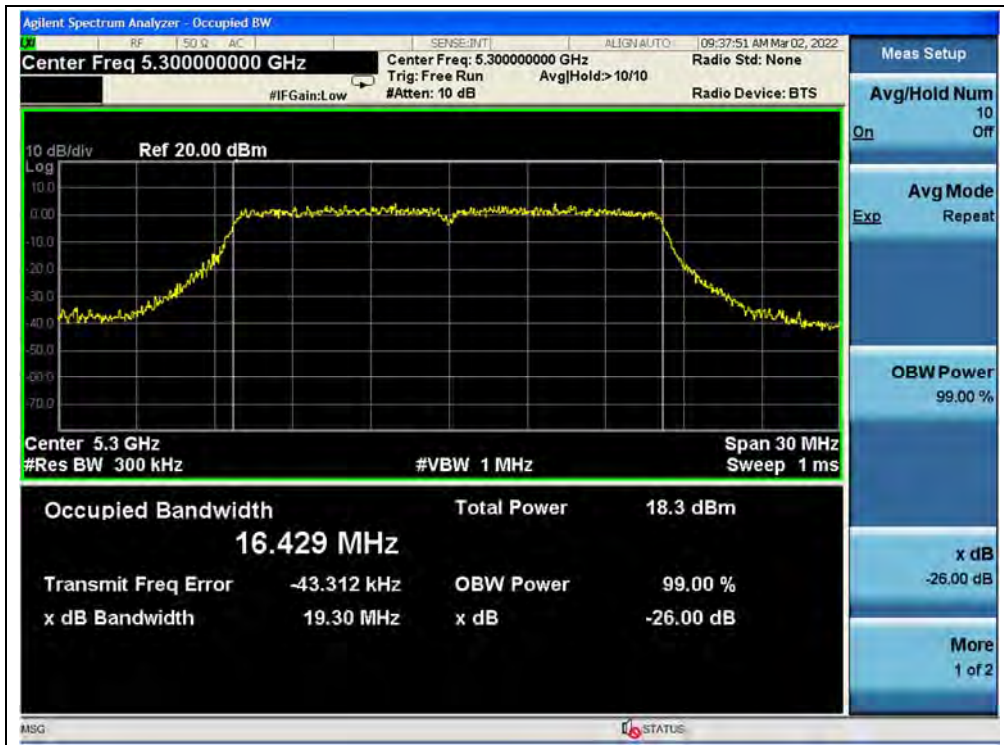

(Channel 60, 5300 MHz, 802.11a)




(Channel 64, 5320MHz, 802.11a)



(Channel 100,5500MHz, 802.11a)



(Channel 120, 5600 MHz, 802.11a)

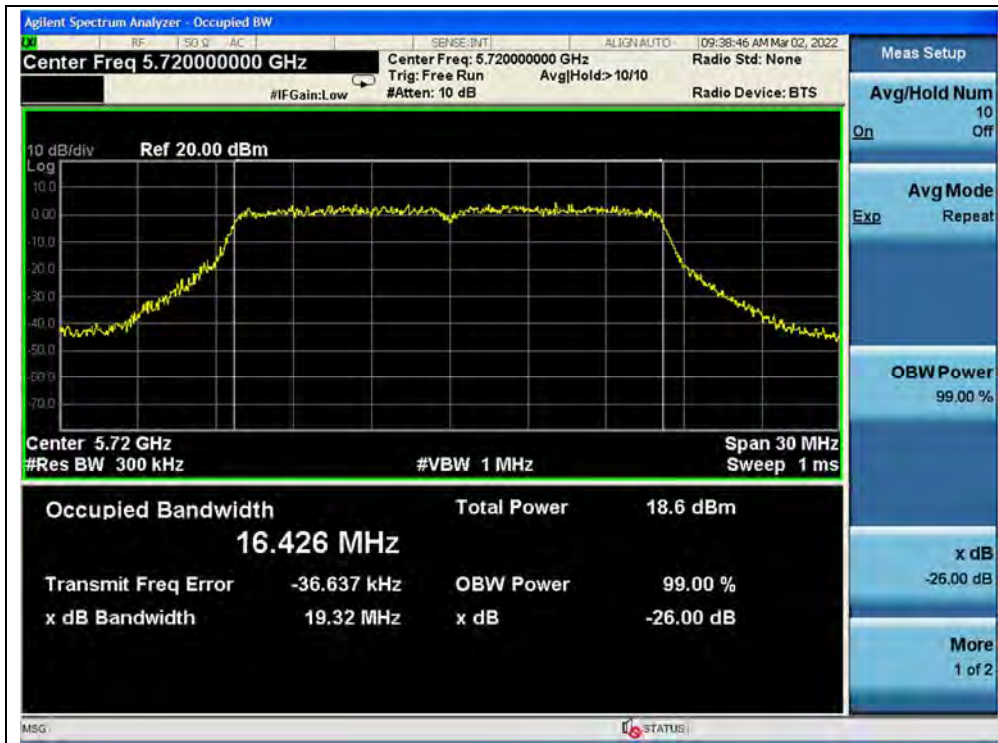


(Channel 144, 5720MHz, 802.11a)



(Channel 144, 5720MHz, 802.11a)



(Channel 149,5745MHz, 802.11a)

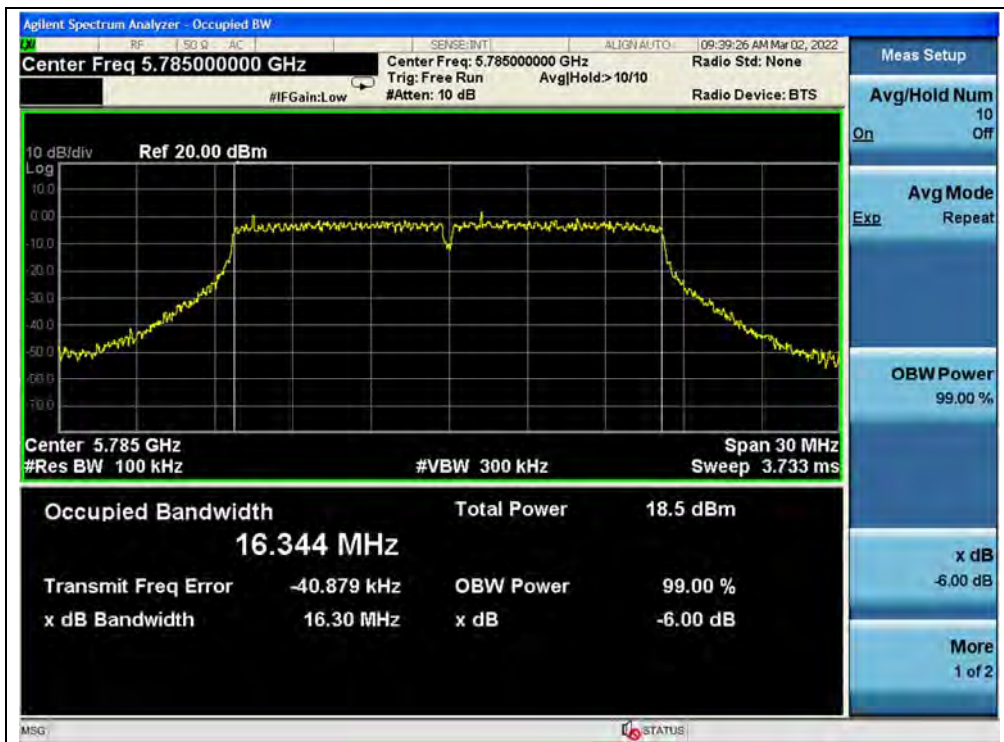

(Channel 157,5785MHz, 802.11a)



(Channel 165, 5825MHz, 802.11a)



802.11n (HT20) Mode

A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	20.39
44	5220	20.31
48	5240	20.08
52	5260	20.31
60	5300	20.38
64	5320	20.65
100	5500	20.29
120	5600	20.58
144	5720	20.62
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
144	5720	17.58
149	5745	17.61
157	5785	17.58
165	5825	17.58

B. Test Plot:




(Channel 36, 5180MHz, 802.11n (HT20))



(Channel 44, 5220MHz, 802.11n (HT20))




(Channel 48, 5240MHz, 802.11n (HT20))

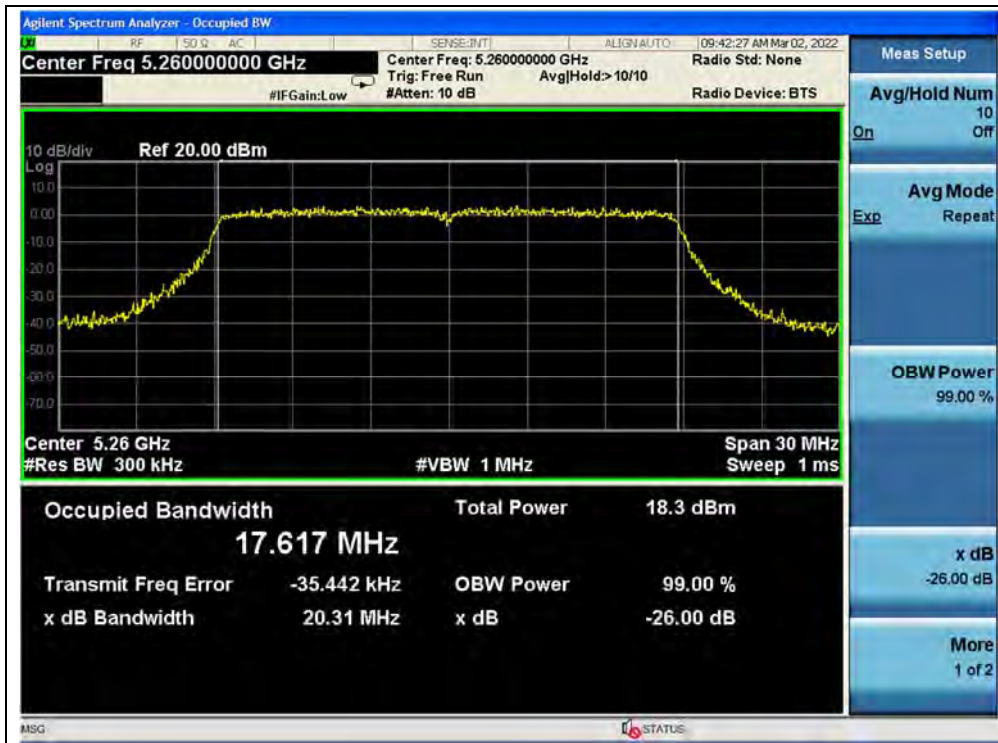

(Channel 52, 5260MHz, 802.11n (HT20))




(Channel 60, 5300MHz, 802.11n (HT20))

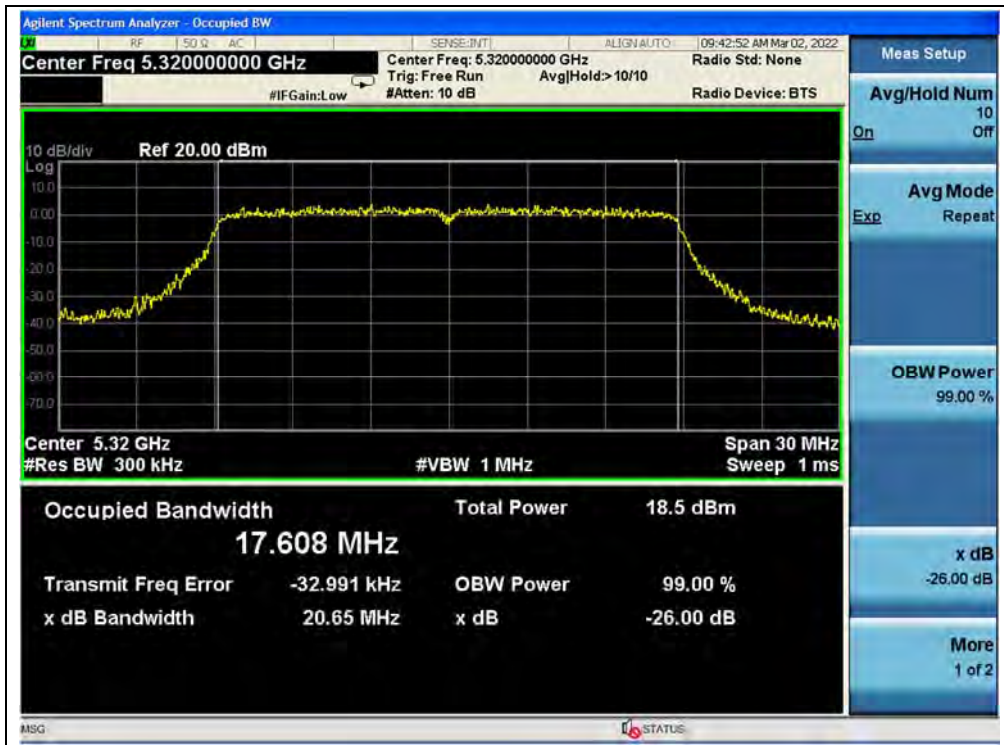

(Channel 64, 5320MHz, 802.11n (HT20))



(Channel 100, 5500MHz, 802.11n (HT20))

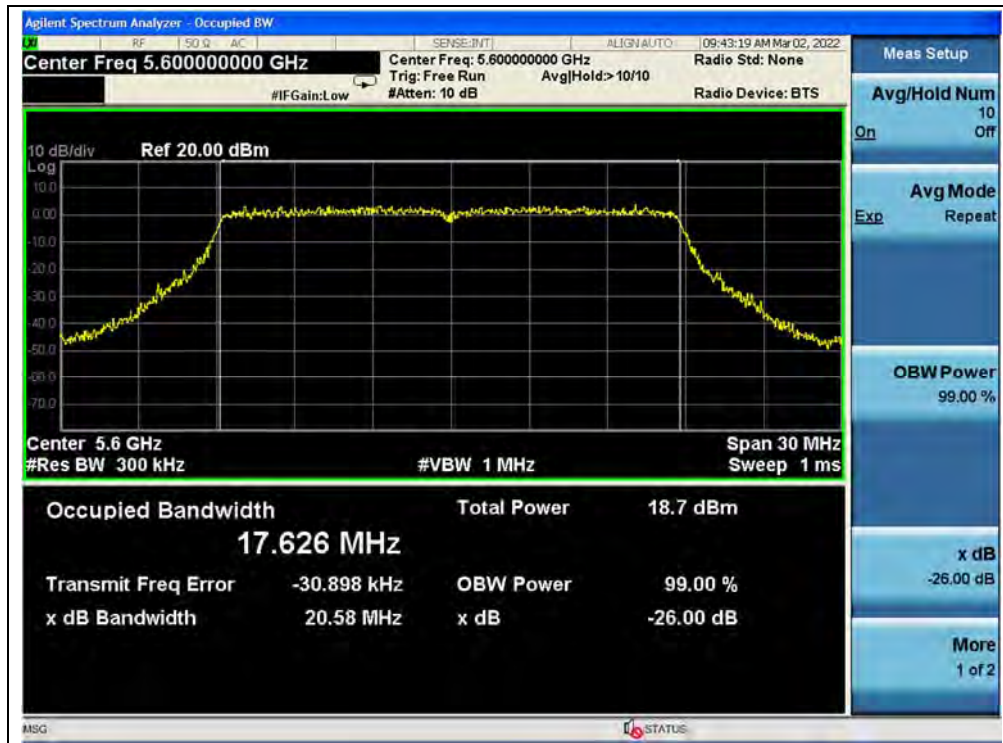

(Channel 120, 5600MHz, 802.11n (HT20))



(Channel 144, 5720MHz, 802.11n (HT20))



(Channel 144, 5720MHz, 802.11 n (HT20))



(Channel 149, 5745MHz, 802.11 n (HT20))



(Channel 157, 5785MHz, 802.11 n (HT20))



(Channel 165, 5825MHz, 802.11 n (HT20))



802.11n (HT40) Test mode

A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
38	5190	39.38
46	5230	39.27
54	5270	39.23
62	5310	39.34
102	5510	39.50
126	5630	39.29
142	5710	39.66
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
142	5710	36.33
151	5755	36.35
159	5795	36.30

B. Test Plot:




(Channel 38, 5190MHz, 802.11n (HT40))



(Channel 46, 5230MHz, 802.11n (HT40))




(Channel 54, 5270MHz, 802.11n (HT40))

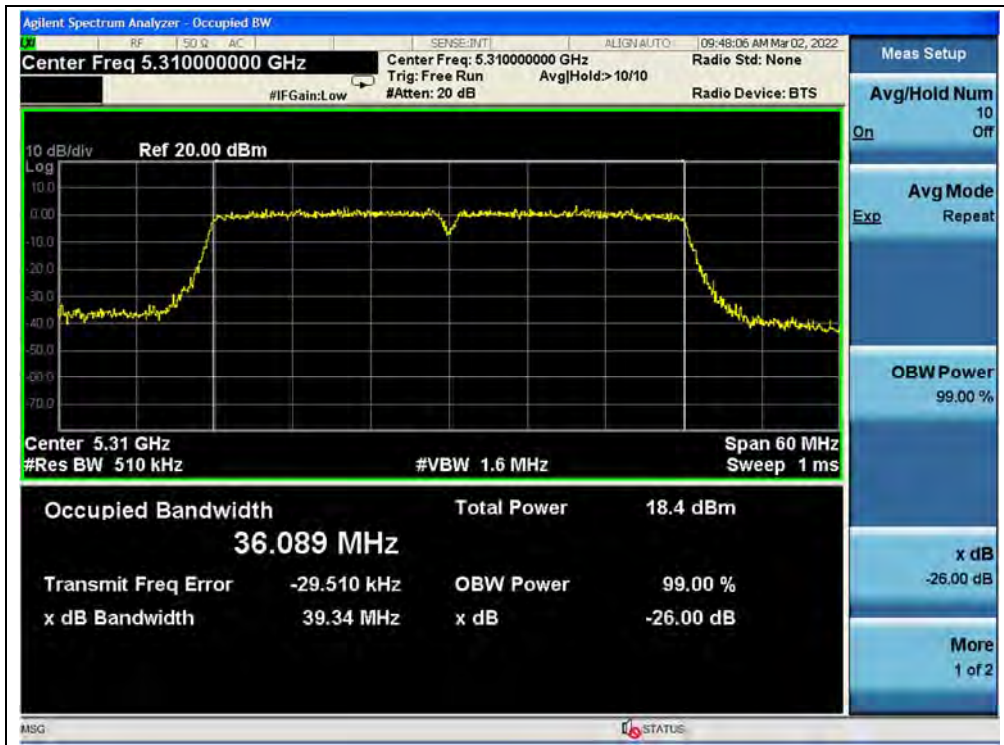

(Channel 62, 5310MHz, 802.11n (HT40))




(Channel 102, 5510MHz, 802.11n (HT40))

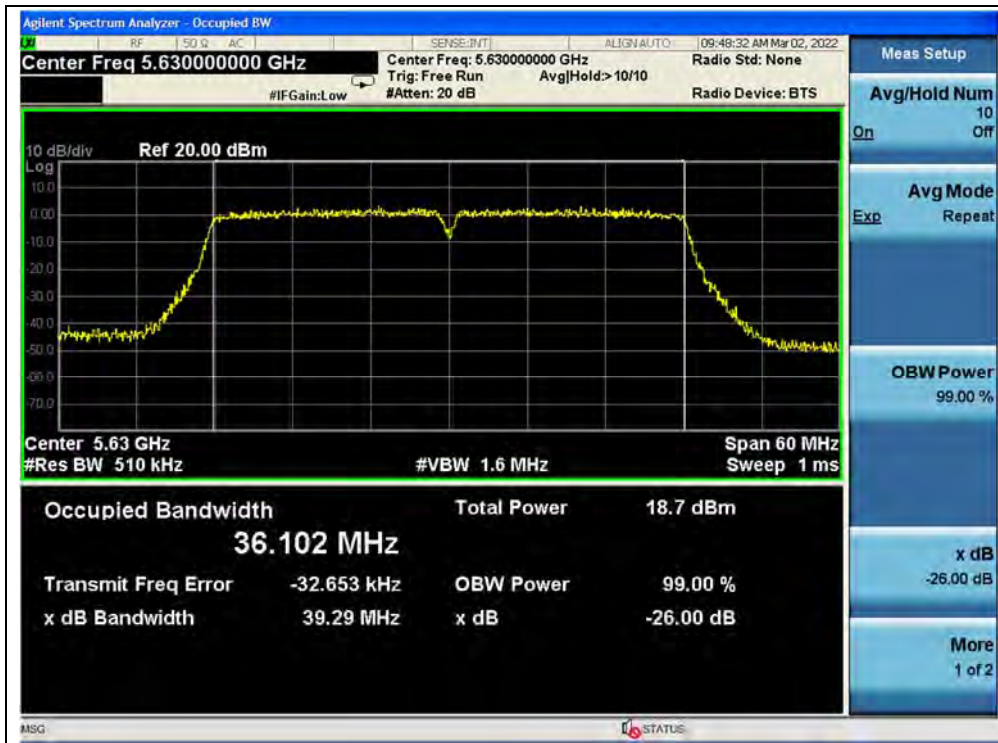

(Channel 126, 5630MHz, 802.11n (HT40))



(Channel 142, 5710MHz, 802.11n (HT40))

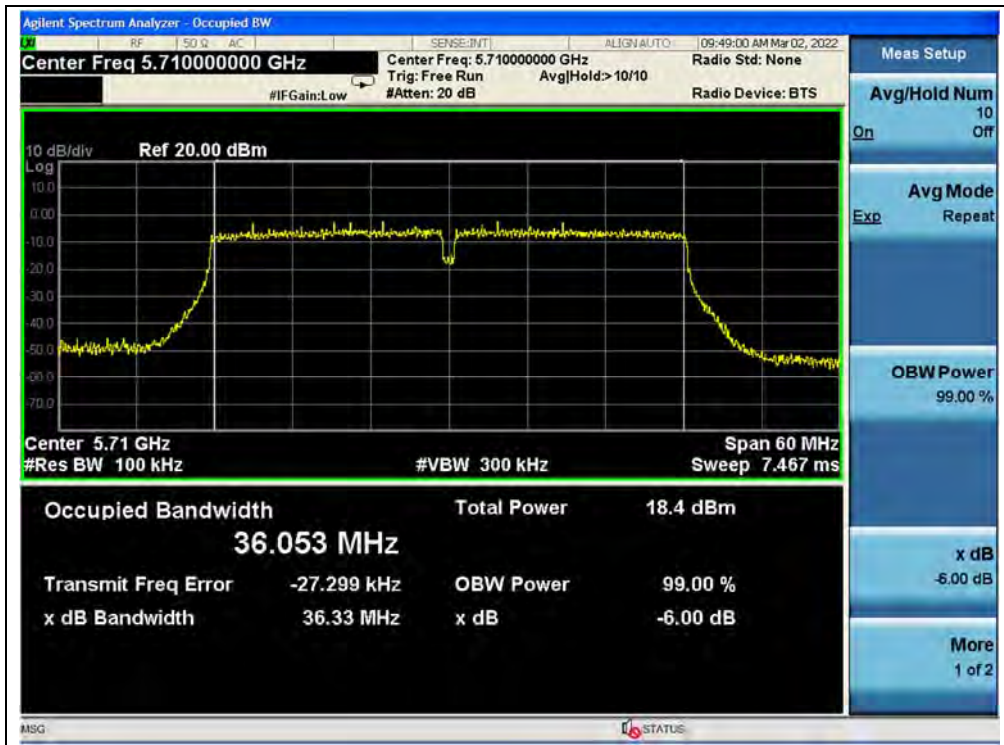

(Channel 142, 5710MHz, 802.11n (HT40))



(Channel 151, 5755MHz, 802.11n (HT40))



(Channel 159, 5795MHz, 802.11n (HT40))



802.11ac (VHT20) Mode

A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	20.13
44	5220	20.32
48	5240	20.42
52	5260	20.13
60	5300	20.37
64	5320	20.22
100	5500	20.30
120	5600	20.65
144	5720	20.42
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
144	5720	17.58
149	5745	17.57
157	5785	17.59
165	5825	17.57

B. Test Plot:




(Channel 36, 5180MHz, 802.11ac (VHT20))



(Channel 44, 5220MHz, 802.11ac (VHT20))




(Channel 48, 5240MHz, 802.11ac (VHT20))

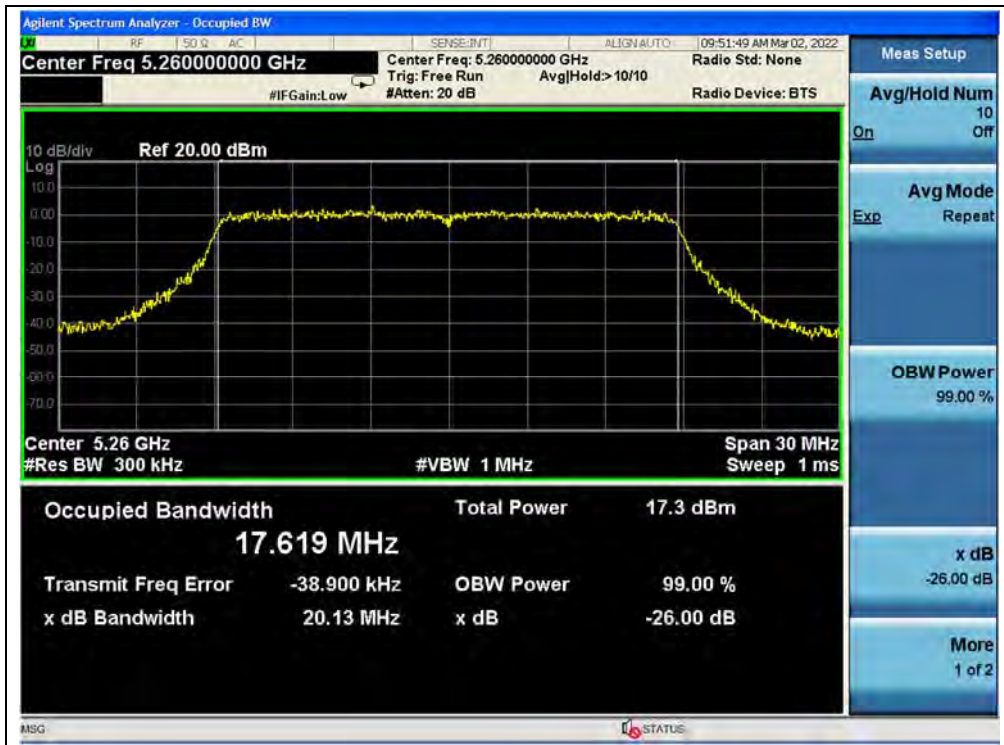

(Channel 52, 5260MHz, 802.11ac (VHT20))




(Channel 60, 5300MHz, 802.11ac (VHT20))

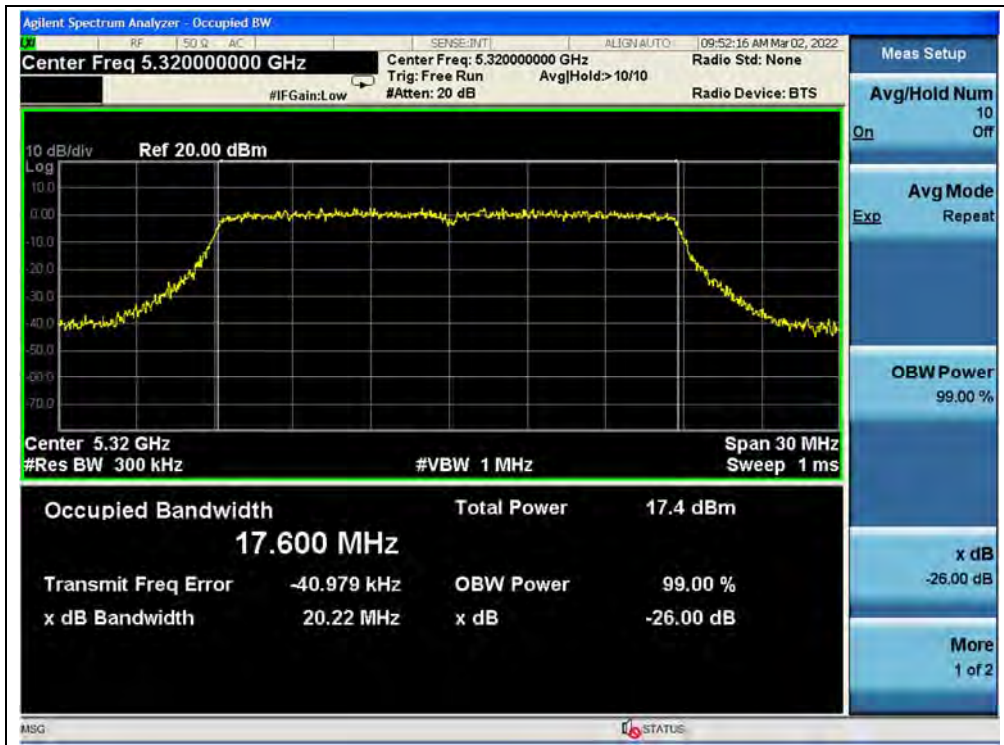

(Channel 64, 5320MHz, 802.11ac (VHT20))



(Channel 100, 5500MHz, 802.11ac (VHT20))

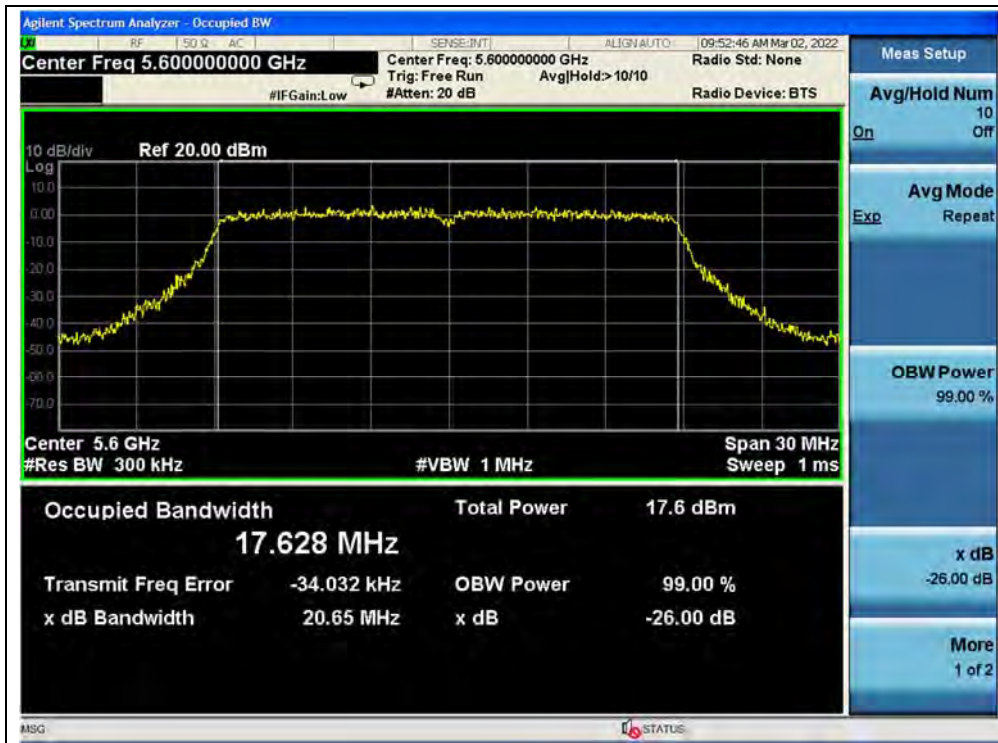

(Channel 120, 5600MHz, 802.11ac (VHT20))



(Channel 144, 5720MHz, 802.11ac (VHT20))



(Channel 144, 5720MHz, 802.11ac (VHT20))



(Channel 149, 5745MHz, 802.11 ac (VHT20))



(Channel 157, 5785MHz, 802.11 ac (VHT20))



(Channel 165, 5825MHz, 802.11 ac (VHT20))




802.11ac (VHT40) Mode

A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
38	5190	39.51
46	5230	39.54
54	5270	39.39
62	5310	39.64
102	5510	39.57
126	5630	39.54
142	5710	39.81
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
142	5710	36.35
151	5755	36.43
159	5795	36.35

B. Test Plot:

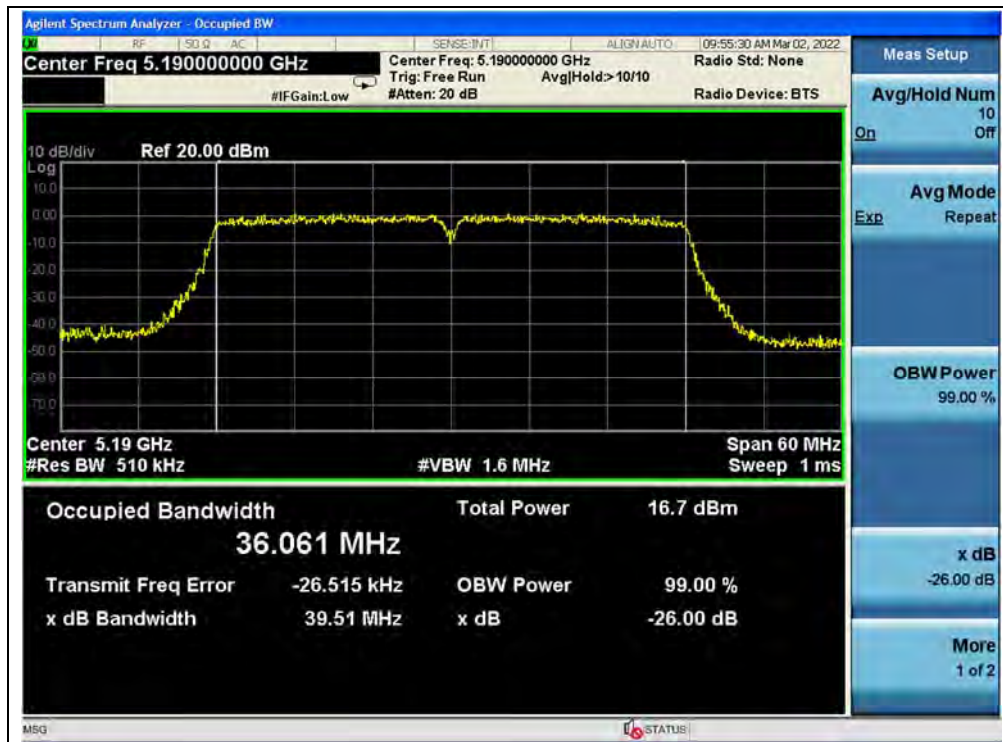


(Channel 38, 5190MHz, 802.11ac (VHT40))



(Channel 46, 5230MHz, 802.11ac (VHT40))



(Channel 54, 5270MHz, 802.11ac (VHT40))

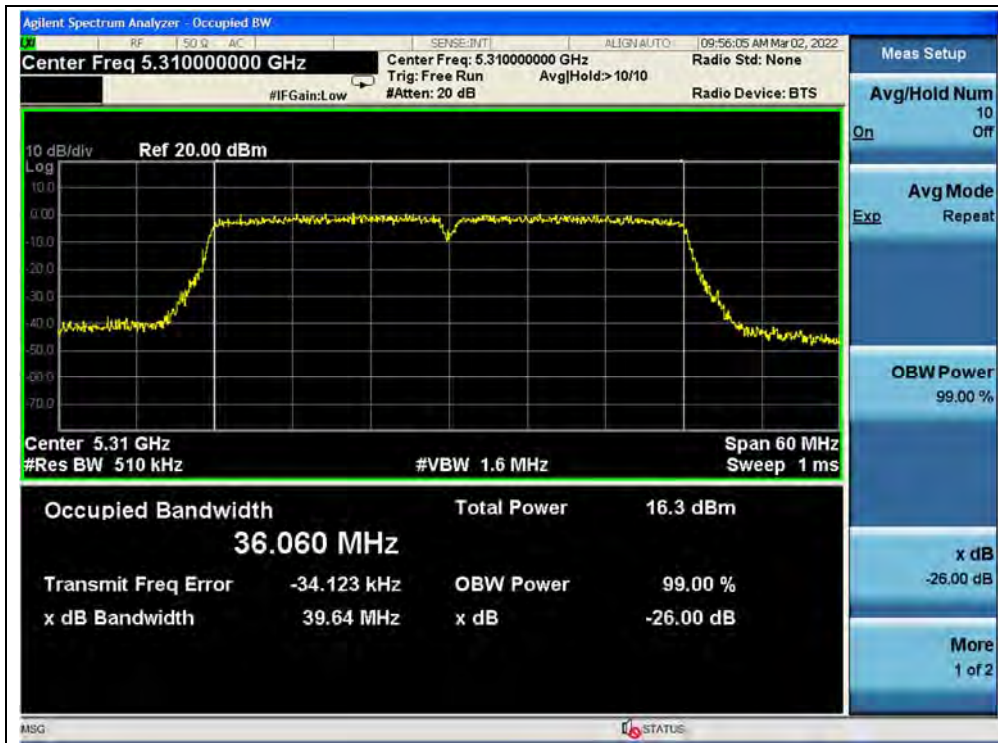


(Channel 62, 5310MHz, 802.11ac (VHT40))




(Channel 102, 5510MHz, 802.11ac (VHT40))




(Channel 126, 5630MHz, 802.11ac (VHT40))

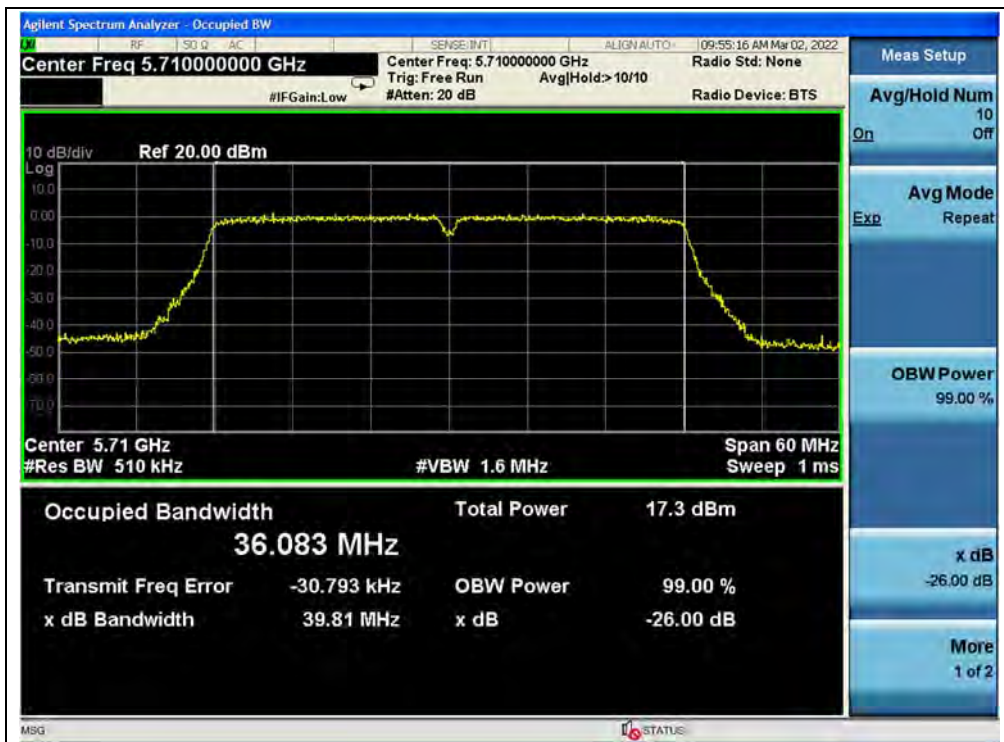


(Channel 142, 5710MHz, 802.11ac (VHT40))

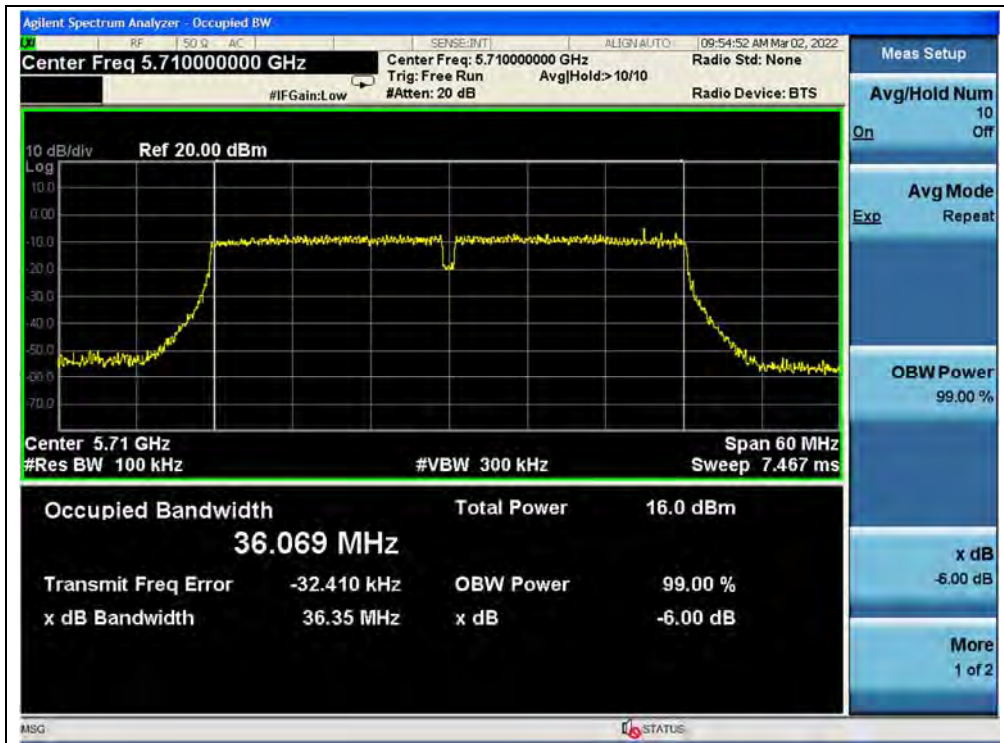

(Channel 142, 5710MHz, 802.11ac (VHT40))

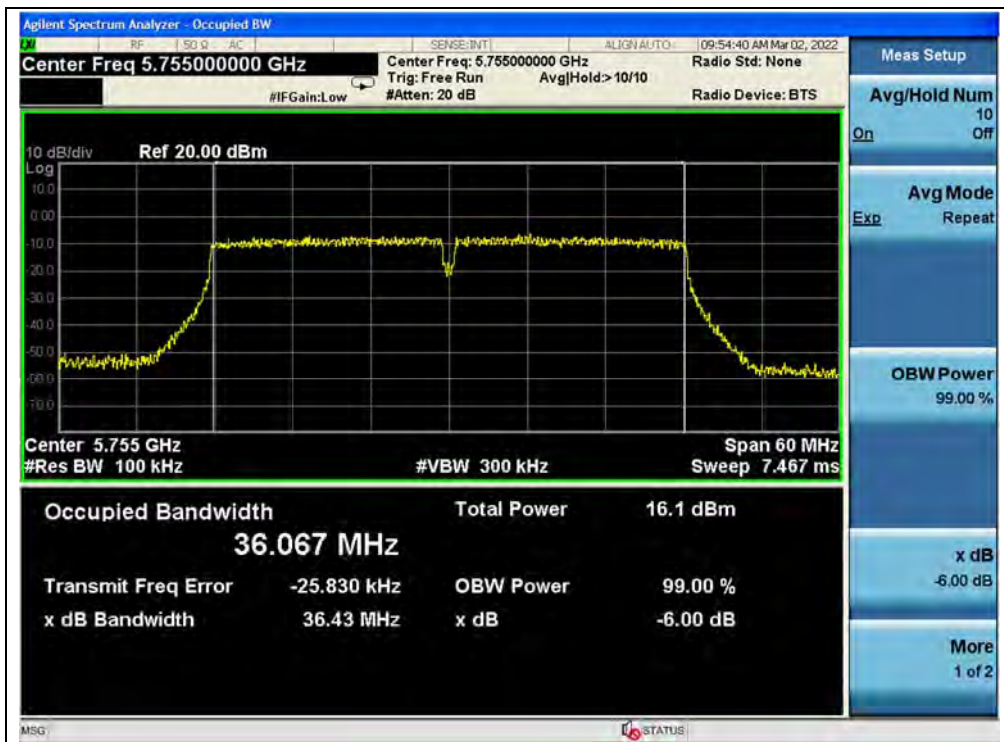

(Channel 151, 5755MHz, 802.11ac (VHT40))

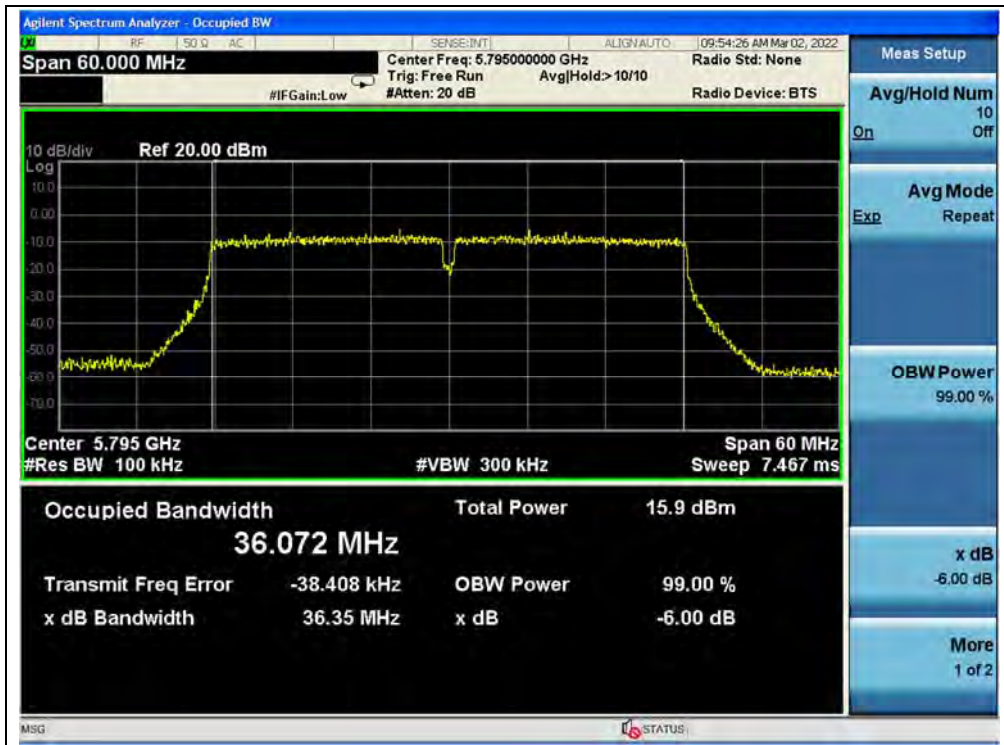

(Channel 159, 5795MHz, 802.11ac (VHT40))




802.11ac (VHT80) Mode


A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
42	5210	80.99
58	5290	81.51
106	5530	81.65
122	5610	81.39
138	5690	80.71
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
138	5690	76.32
155	5775	76.40


B. Test Plot:

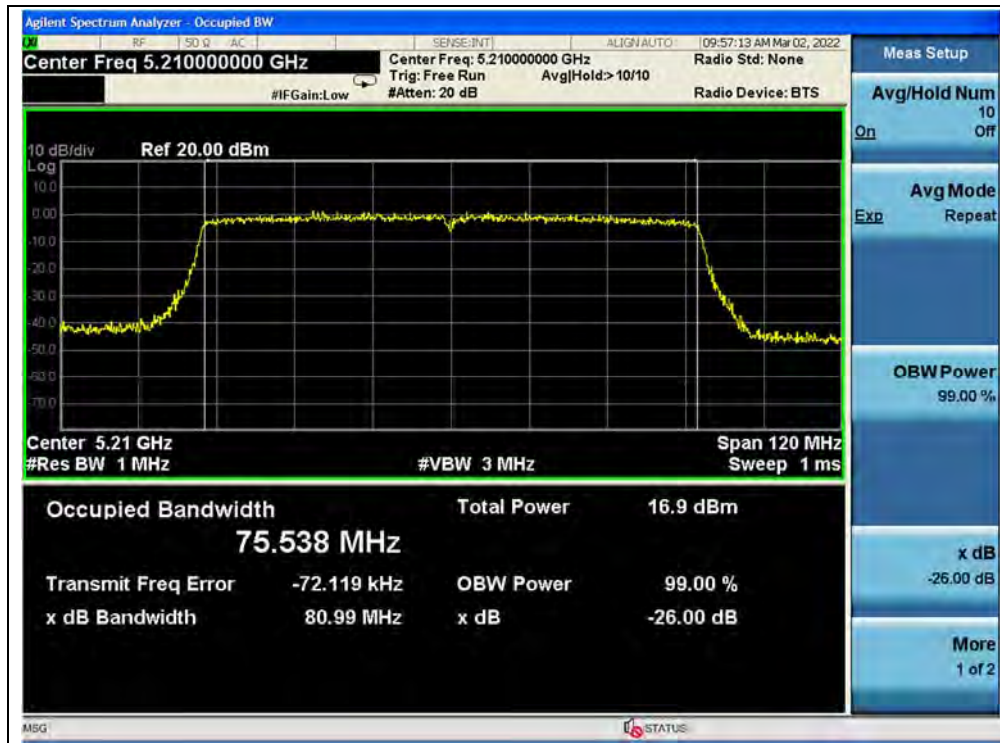


(Channel 42, 5210MHz, 802.11ac (VHT80))

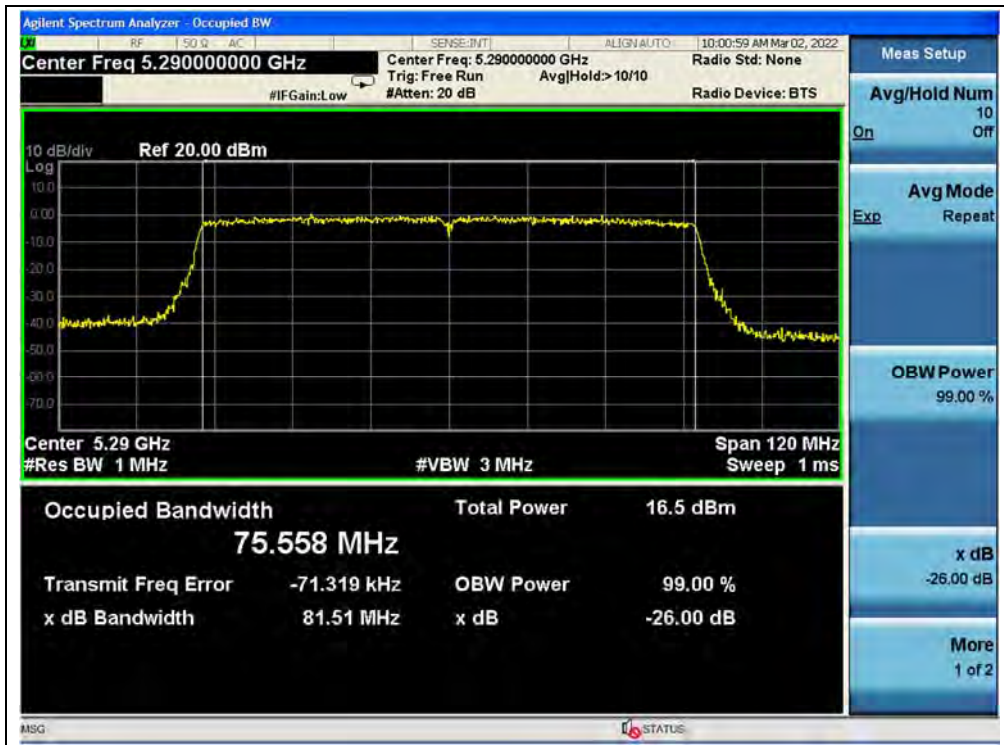

(Channel 58, 5290MHz, 802.11ac (VHT80))

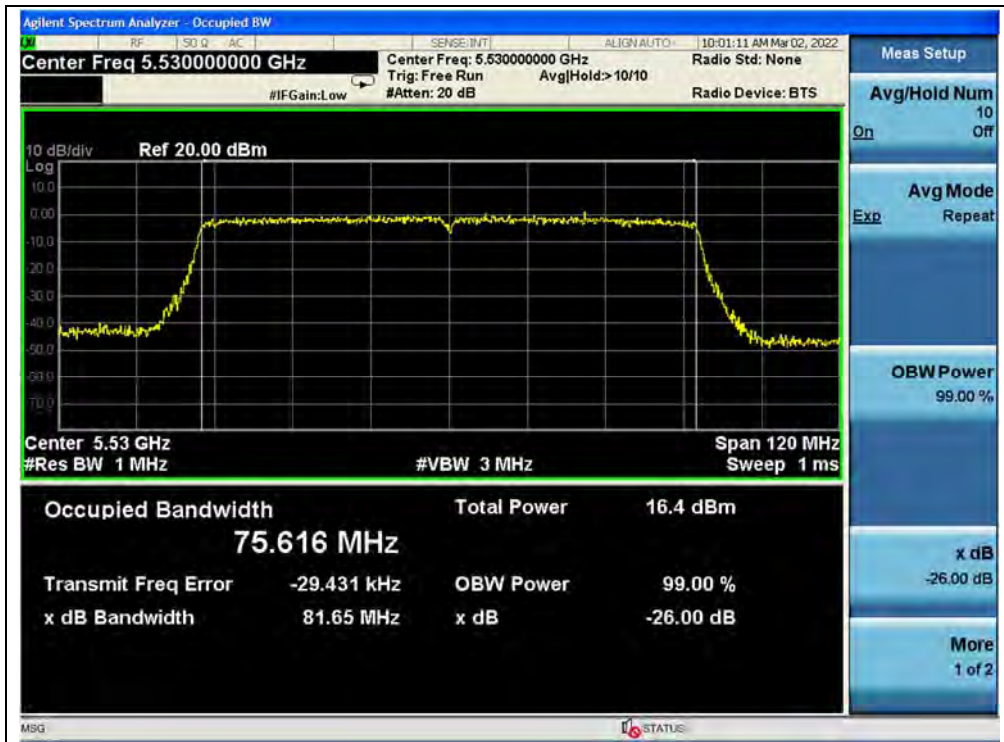


(Channel 106, 5530MHz, 802.11ac (VHT80))

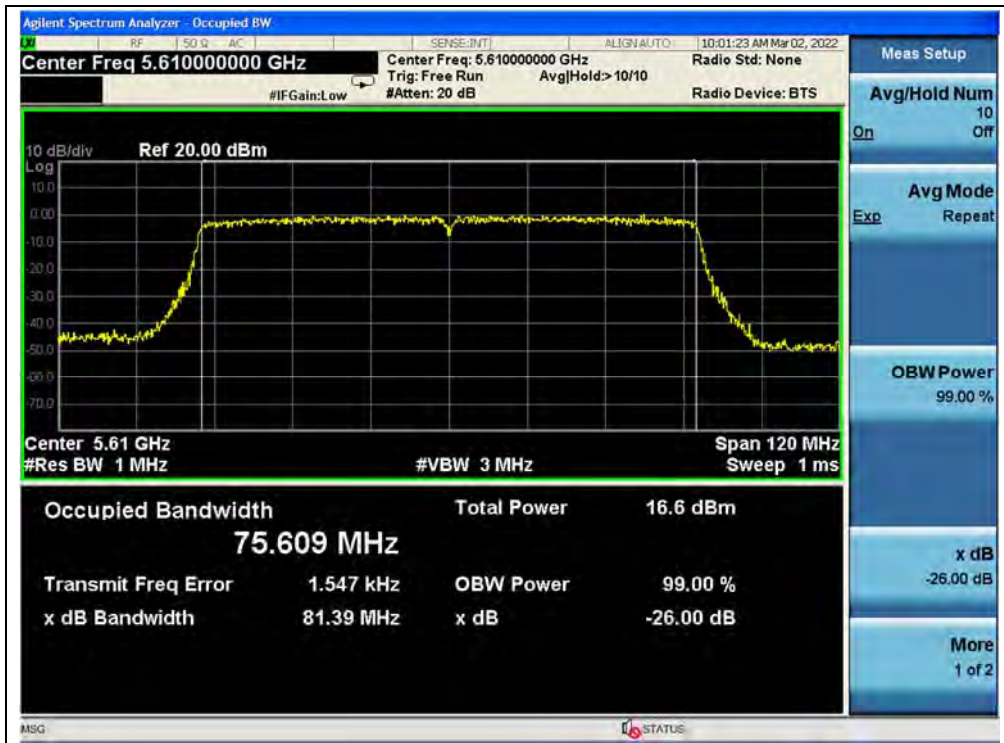


(Channel 122, 5610MHz, 802.11ac (VHT80))



(Channel 138, 5690MHz, 802.11ac (VHT80))

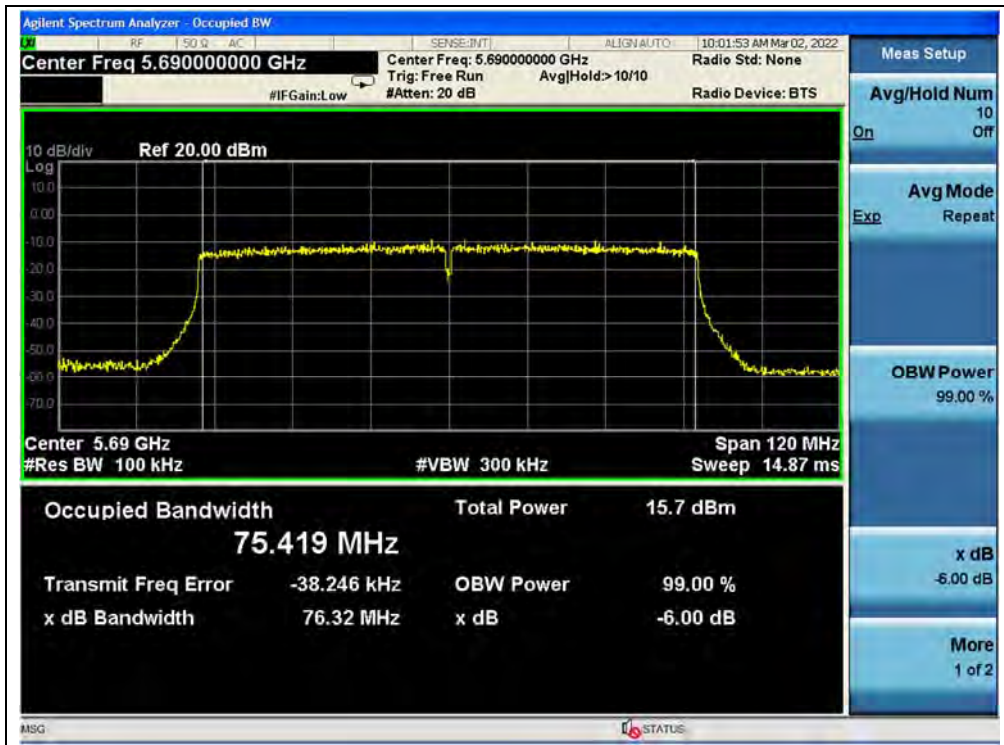

(Channel 138, 5690MHz, 802.11ac (VHT80))

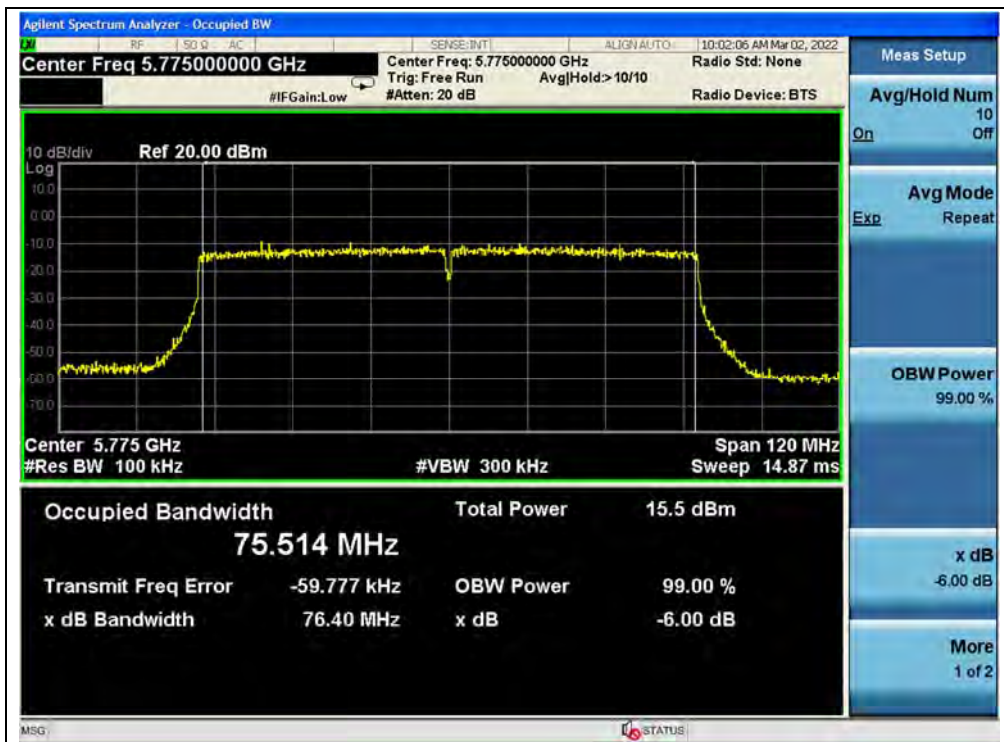

(Channel 155, 5775MHz, 802.11ac (VHT80))



802.11ax (HEW20) Mode

A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	21.12
44	5220	20.83
48	5240	20.92
52	5260	20.97
60	5300	20.83
64	5320	20.91
100	5500	20.75
120	5600	20.81
144	5720	20.95
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
144	5720	18.64
149	5745	18.88
157	5785	18.78
165	5825	18.91

B. Test Plot:




(Channel 36, 5180MHz, 802.11ax (HEW20))



(Channel 44, 5220MHz, 802.11ax (HEW20))



(Channel 48, 5240MHz, 802.11ax (HEW20))

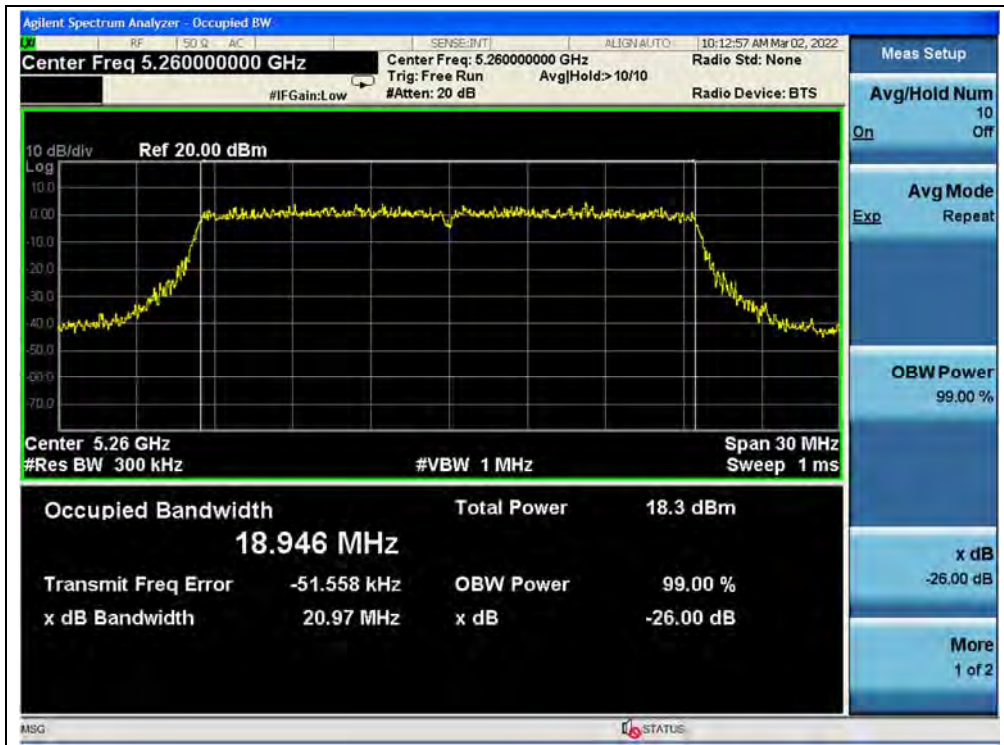

(Channel 52, 5260MHz, 802.11ax (HEW20))




(Channel 60, 5300MHz, 802.11ax (HEW20))



(Channel 64, 5320MHz, 802.11ax (HEW20))



(Channel 100, 5500MHz, 802.11ax (HEW20))

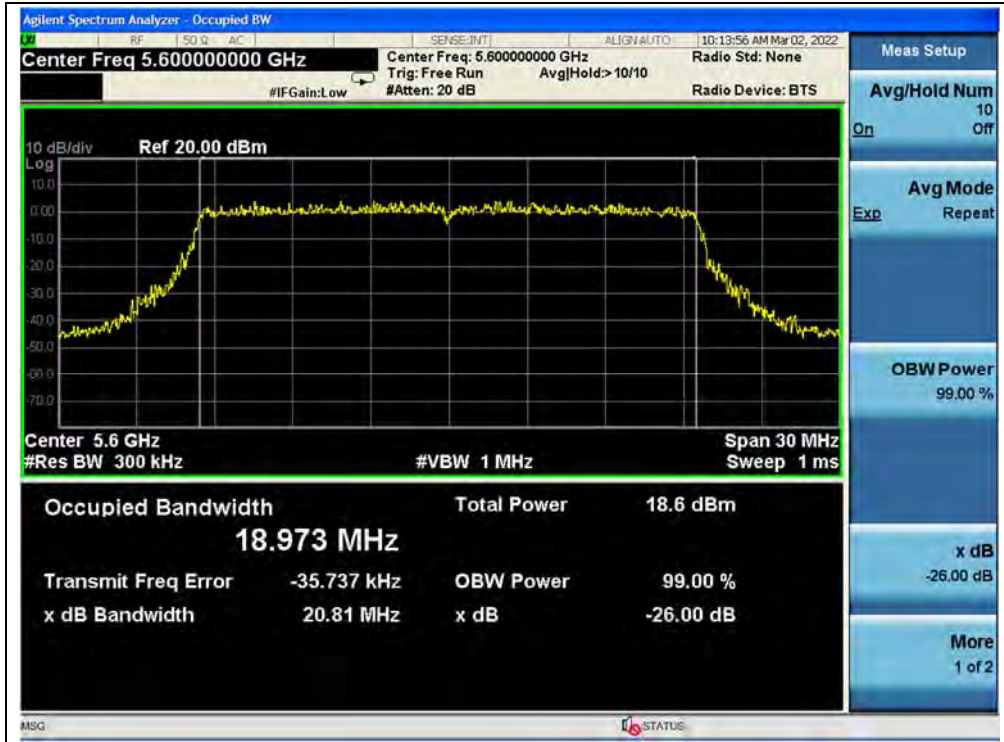

(Channel 120, 5600MHz, 802.11ax (HEW20))



(Channel 144, 5720MHz, 802.11ax (HEW20))



(Channel 144, 5720MHz, 802.11ax (HEW20))



(Channel 149, 5745MHz, 802.11ax (HEW20))



(Channel 157, 5785MHz, 802.11ax (HEW20))



(Channel 165, 5825MHz, 802.11ax (HEW20))



802.11ax (HEW20)(RU26) Mode

A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	20.70
44	5220	20.71
48	5240	21.04
52	5260	20.51
60	5300	20.45
64	5320	20.53
100	5500	20.78
120	5600	21.08
144	5720	21.14
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
144	5720	2.09
149	5745	2.09
157	5785	2.09
165	5825	2.05

B. Test Plot:



(Channel 36, 5180MHz, 802.11ax (HEW20)(RU26))



(Channel 44, 5220MHz, 802.11ax (HEW20)(RU26))



(Channel 48, 5240MHz, 802.11ax (HEW20)(RU26))



(Channel 52, 5260MHz, 802.11ax (HEW20)(RU26))



(Channel 60, 5300MHz, 802.11ax (HEW20)(RU26))



(Channel 64, 5320MHz, 802.11ax (HEW20)(RU26))



(Channel 100, 5500MHz, 802.11ax (HEW20)(RU26))



(Channel 120, 5600MHz, 802.11ax (HEW20)(RU26))



(Channel 144, 5720MHz, 802.11ax (HEW20)(RU26))



(Channel 144, 5720MHz, 802.11ax (HEW20)(RU26))



(Channel 149, 5745MHz, 802.11ax (HEW20)(RU26))



(Channel 157, 5785MHz, 802.11ax (HEW20)(RU26))



(Channel 165, 5825MHz, 802.11ax (HEW20)(RU26))