


802.11ax HEW40_Nss1,(MCS0)_4TX

02/03/2020

5755MHz_TX

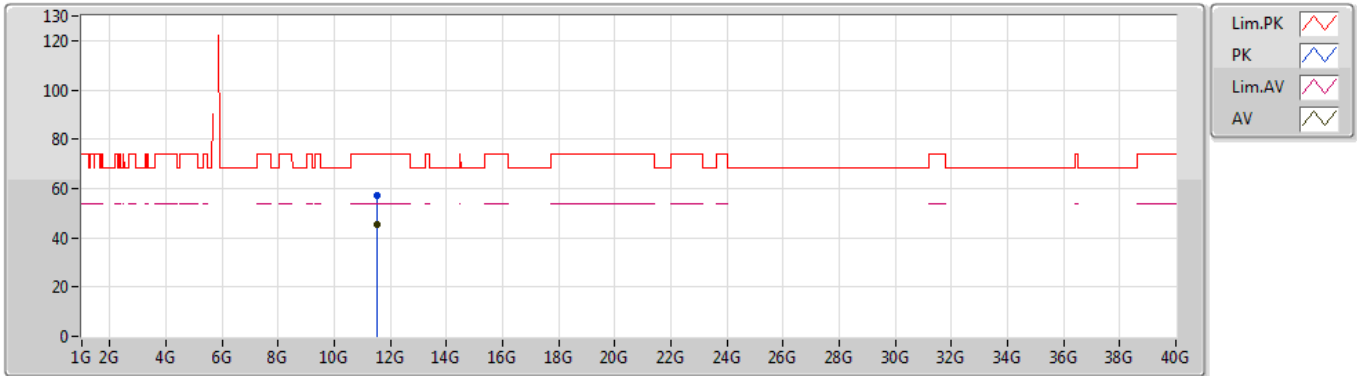


EUT Y_4TX
04-F-W-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)
PK	11.518G	57.02	74.00	-16.98	11.65	3	Horizontal	132	1.38	-	45.37
AV	11.5179G	45.61	54.00	-8.39	11.65	3	Horizontal	132	1.38	-	33.96

802.11ax HEW40_Nss1,(MCS0)_4TX

02/03/2020

5795MHz_TX

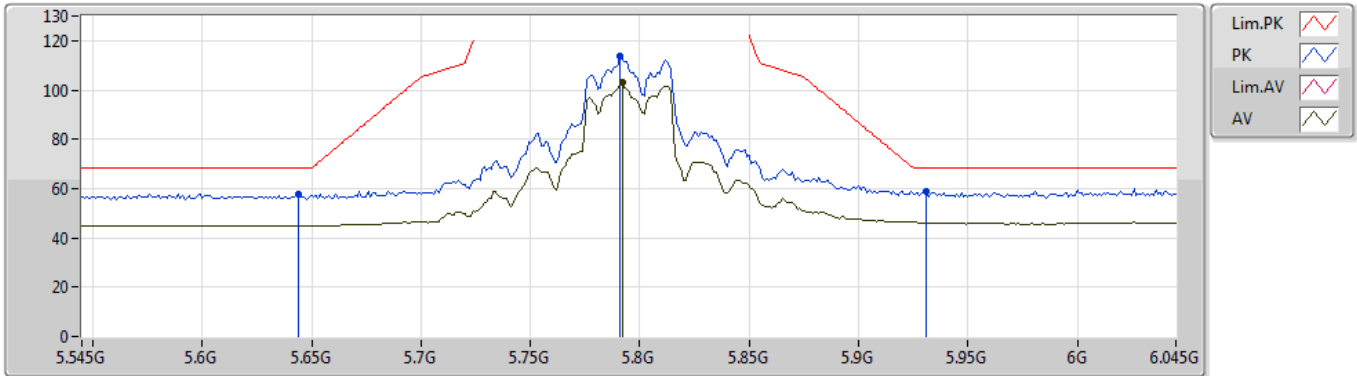


EUT_Y_4TX
04-F-W-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)
PK	5.644G	57.70	68.20	-10.50	5.60	3	Vertical	276	1.91	-	52.10
PK	5.791G	113.63	Inf	-Inf	5.72	3	Vertical	276	1.91	-	107.91
AV	5.792G	102.97	Inf	-Inf	5.72	3	Vertical	276	1.91	-	97.25
PK	5.931G	58.71	68.20	-9.49	6.43	3	Vertical	276	1.91	-	52.28

802.11ax HEW40_Nss1,(MCS0)_4TX

02/03/2020

5795MHz_TX

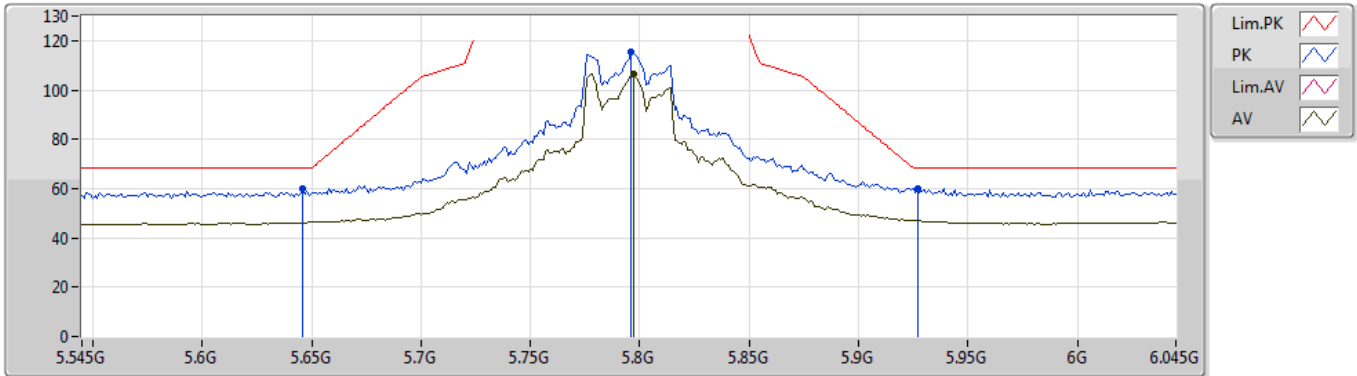


EUT Y_4TX
04-F-W-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)
PK	5.646G	60.13	68.20	-8.07	5.61	3	Horizontal	235	1.50	-	54.52
PK	5.796G	115.37	Inf	-Inf	5.73	3	Horizontal	235	1.50	-	109.64
AV	5.797G	106.36	Inf	-Inf	5.73	3	Horizontal	235	1.50	-	100.63
PK	5.927G	59.86	68.20	-8.34	6.42	3	Horizontal	235	1.50	-	53.44

802.11ax HEW40_Nss1,(MCS0)_4TX

02/03/2020

5795MHz_TX

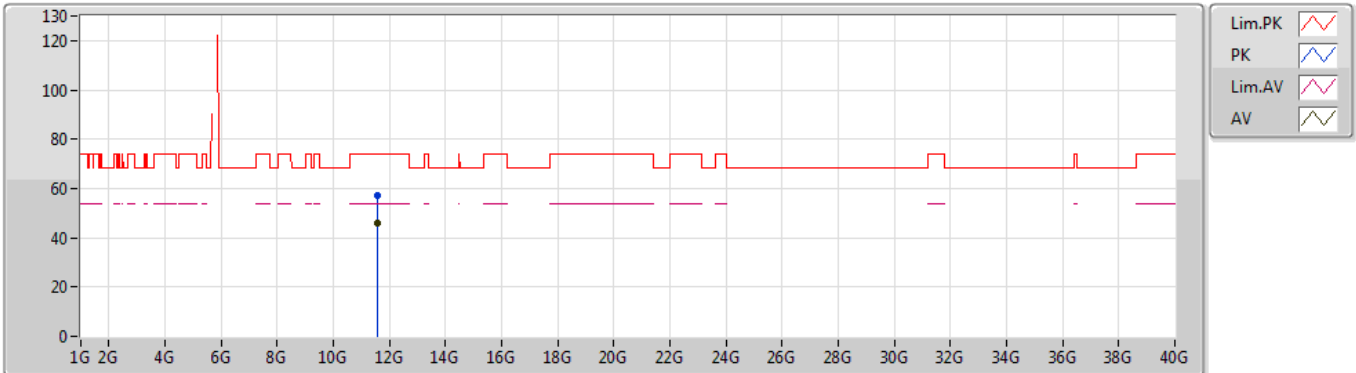


EUT Y_4TX
04-F-W-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)
PK	11.5882G	57.25	74.00	-16.75	11.56	3	Vertical	261	2.16	-	45.69
AV	11.5883G	46.02	54.00	-7.98	11.56	3	Vertical	261	2.16	-	34.46

802.11ax HEW40_Nss1,(MCS0)_4TX

02/03/2020

5795MHz_TX

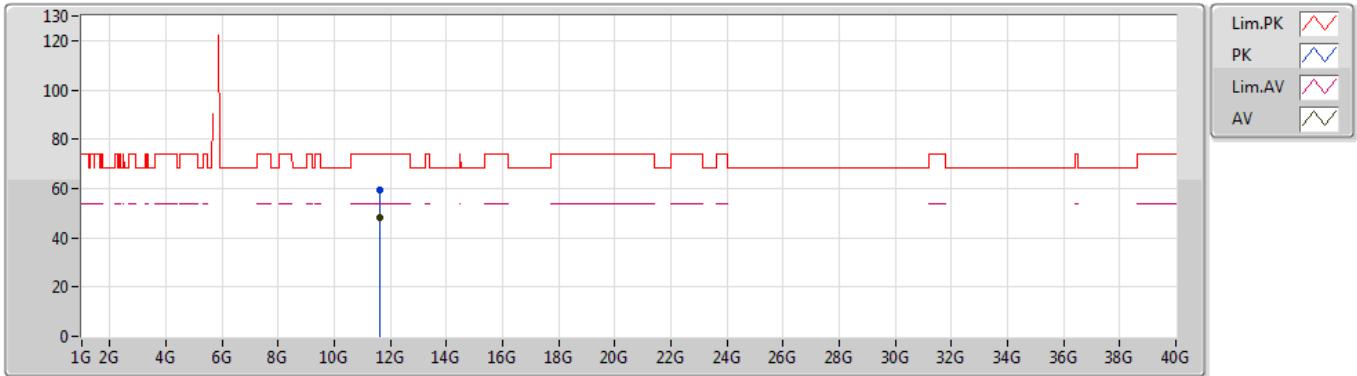


EUT Y_4TX
04-F-W-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)
PK	11.6G	59.37	74.00	-14.63	11.55	3	Horizontal	134	1.39	-	47.82
AV	11.6005G	48.32	54.00	-5.68	11.55	3	Horizontal	134	1.39	-	36.77

802.11ax HEW80_Nss1,(MCS0)_4TX

02/03/2020

5210MHz_TX

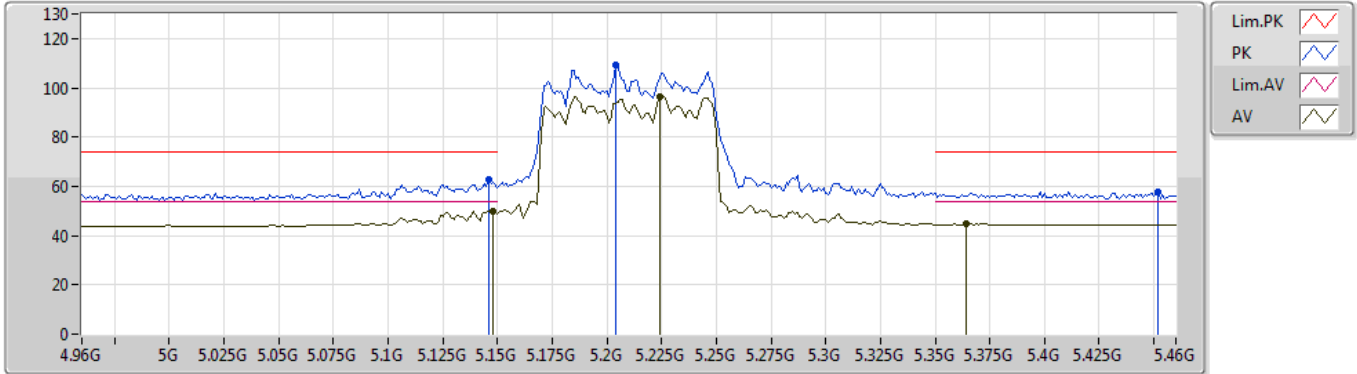


EUT_Y_4TX
04-F-W-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)
PK	5.146G	62.73	74.00	-11.27	4.16	3	Vertical	42	1.50	-	58.57
AV	5.148G	50.11	54.00	-3.89	4.16	3	Vertical	42	1.50	-	45.95
PK	5.204G	109.08	Inf	-Inf	4.24	3	Vertical	42	1.50	-	104.84
AV	5.224G	96.39	Inf	-Inf	4.27	3	Vertical	42	1.50	-	92.12
PK	5.452G	57.47	74.00	-16.53	4.99	3	Vertical	42	1.50	-	52.48
AV	5.364G	44.64	54.00	-9.36	4.60	3	Vertical	42	1.50	-	40.04

802.11ax HEW80_Nss1,(MCS0)_4TX

02/03/2020

5210MHz_TX

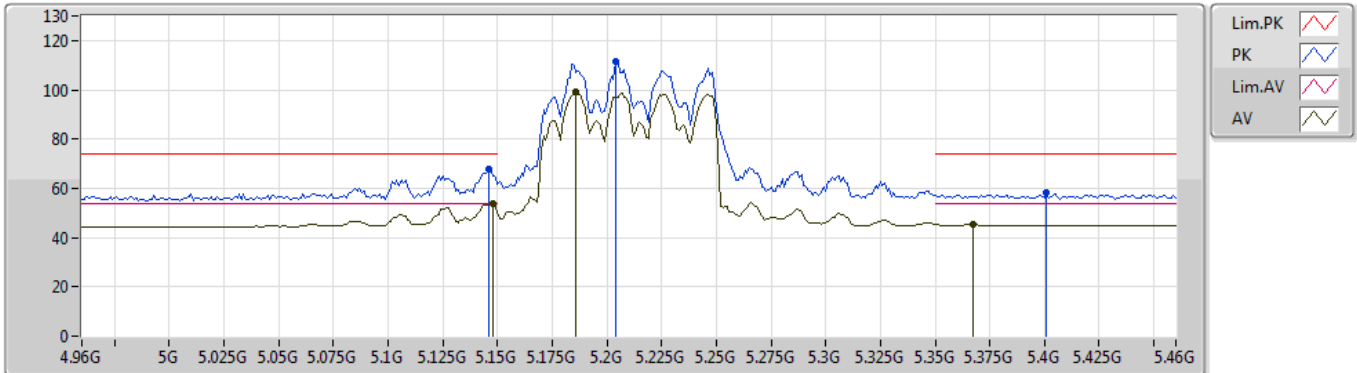


EUT Y_4TX
04-F-W-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)
PK	5.146G	68.08	74.00	-5.92	4.16	3	Horizontal	244	1.46	-	63.92
AV	5.148G	53.79	54.00	-0.21	4.16	3	Horizontal	244	1.46	-	49.63
PK	5.204G	111.49	Inf	-Inf	4.24	3	Horizontal	244	1.46	-	107.25
AV	5.186G	99.44	Inf	-Inf	4.22	3	Horizontal	244	1.46	-	95.22
PK	5.401G	58.12	74.00	-15.88	4.73	3	Horizontal	244	1.46	-	53.39
AV	5.367G	45.38	54.00	-8.62	4.61	3	Horizontal	244	1.46	-	40.77

802.11ax HEW80_Nss1,(MCS0)_4TX

02/03/2020

5210MHz_TX

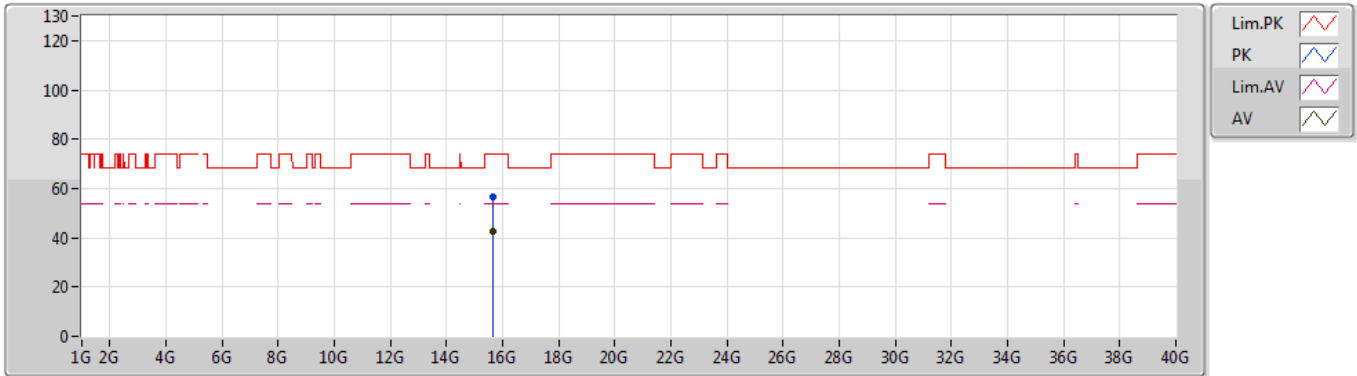


EUT Y_4TX
04-F-W-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)
PK	15.6678G	56.70	74.00	-17.30	11.24	3	Vertical	217	2.52	-	45.46
AV	15.6726G	42.85	54.00	-11.15	11.23	3	Vertical	217	2.52	-	31.62

802.11ax HEW80_Nss1,(MCS0)_4TX

02/03/2020

5210MHz_TX

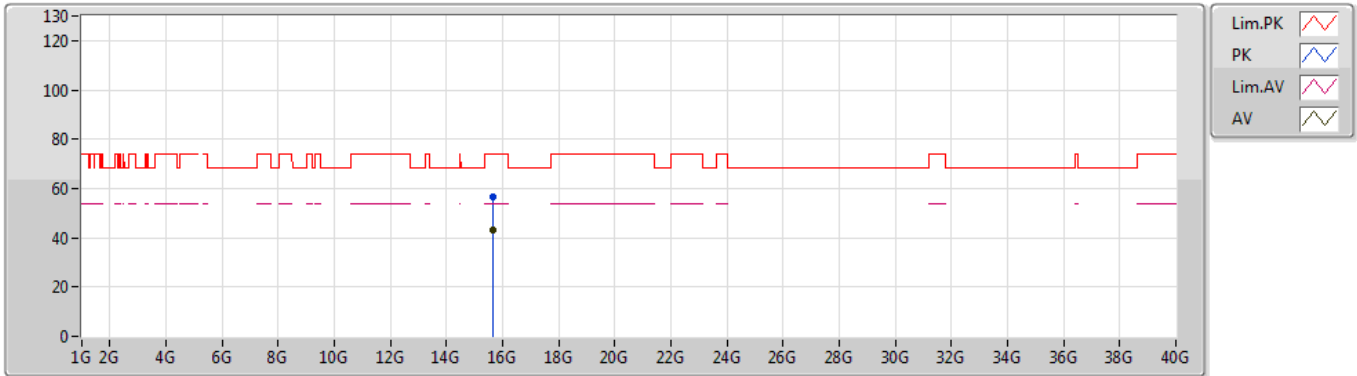


EUT Y_4TX
04-F-W-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)
PK	15.6676G	56.78	74.00	-17.22	11.24	3	Horizontal	148	1.50	-	45.54
AV	15.6774G	42.94	54.00	-11.06	11.21	3	Horizontal	148	1.50	-	31.73

802.11ax HEW80_Nss1,(MCS0)_4TX

02/03/2020

5775MHz_TX

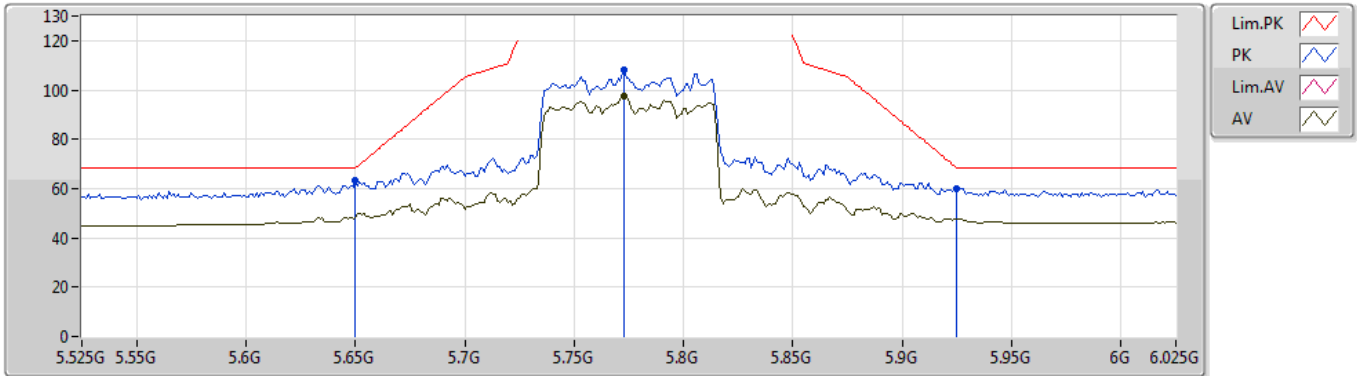


EUT Y_4TX
04-F-B-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)
PK	5.65G	63.05	68.20	-5.15	5.61	3	Vertical	58	1.53	-	57.44
PK	5.773G	108.06	Inf	-Inf	5.71	3	Vertical	58	1.53	-	102.35
AV	5.773G	97.58	Inf	-Inf	5.71	3	Vertical	58	1.53	-	91.87
PK	5.925G	60.20	68.20	-8.00	6.41	3	Vertical	58	1.53	-	53.79

802.11ax HEW80_Nss1,(MCS0)_4TX

02/03/2020

5775MHz_TX

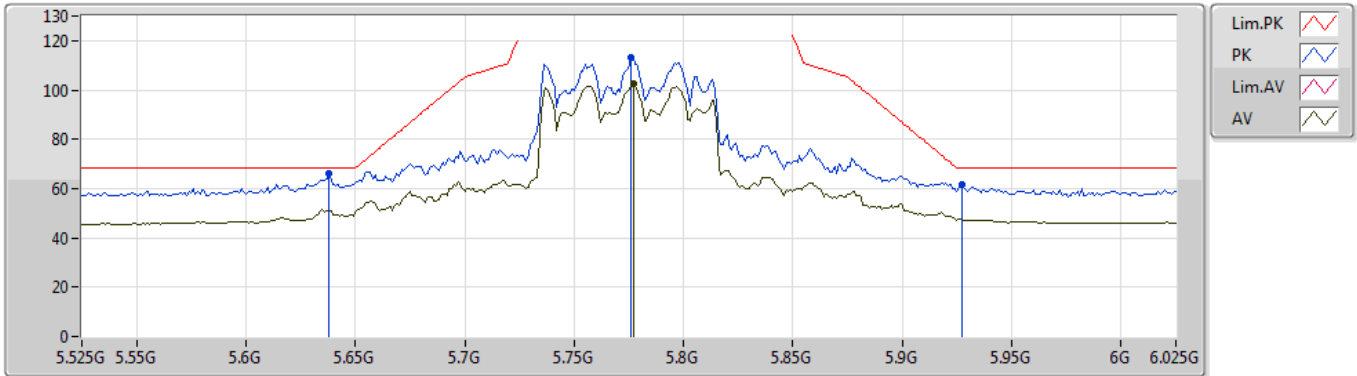


EUT Y_4TX
04-F-B-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)
PK	5.638G	65.97	68.20	-2.23	5.60	3	Horizontal	234	1.50	-	60.37
PK	5.776G	113.29	Inf	-Inf	5.71	3	Horizontal	234	1.50	-	107.58
AV	5.777G	102.54	Inf	-Inf	5.71	3	Horizontal	234	1.50	-	96.83
PK	5.927G	61.48	68.20	-6.72	6.42	3	Horizontal	234	1.50	-	55.06

802.11ax HEW80_Nss1,(MCS0)_4TX

02/03/2020

5775MHz_TX

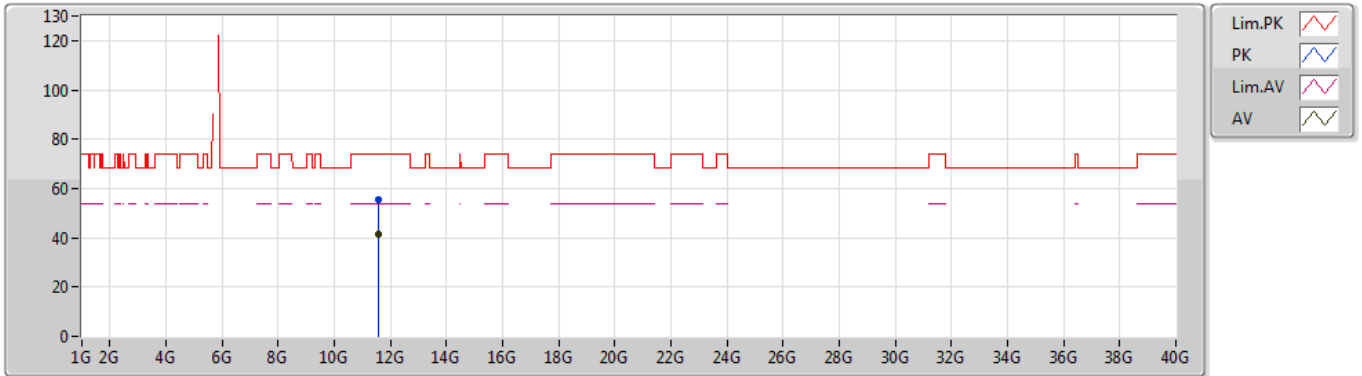


EUT Y_4TX
04-F-B-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)
PK	11.55208G	55.31	74.00	-18.69	11.60	3	Vertical	299	2.97	-	43.71
AV	11.54968G	41.54	54.00	-12.46	11.61	3	Vertical	299	2.97	-	29.93

802.11ax HEW80_Nss1,(MCS0)_4TX

02/03/2020

5775MHz_TX

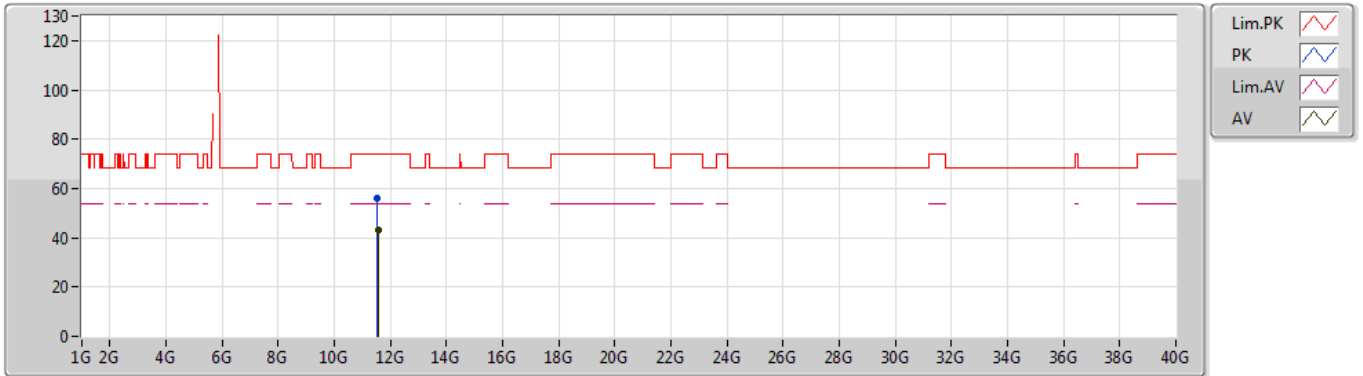

EUT Y_4TX
04-F-B-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)
PK	11.5388G	56.08	74.00	-17.92	11.62	3	Horizontal	131	1.44	-	44.46
AV	11.55976G	43.19	54.00	-10.81	11.60	3	Horizontal	131	1.44	-	31.59



For beamforming mode:


Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ac.VHT20-BF_Nss1,(MCS0)_4TX	Pass	PK	17.47436G	68.16	68.20	-0.04	3	Vertical	276	2.60	-

802.11ac VHT20-BF_Nss1,(MCS0)_4TX

17/01/2020

5180MHz_TX

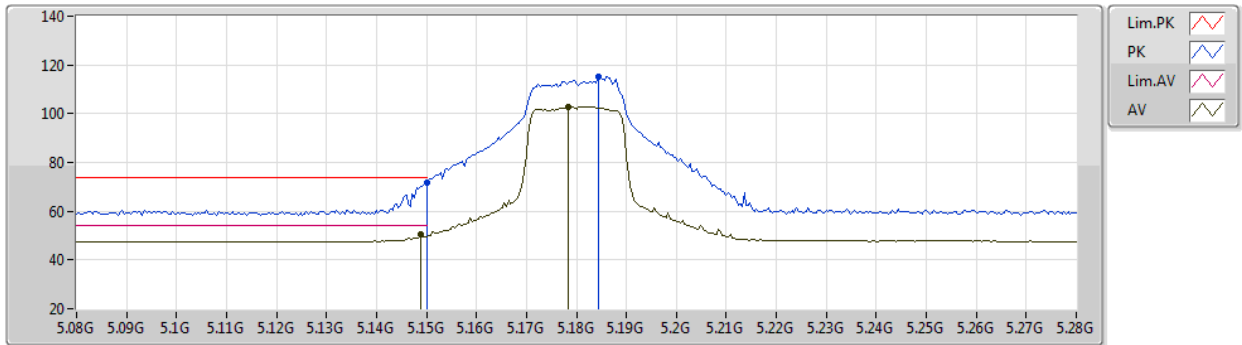


EUT Y_4TX
02-D-J-5-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.15G	71.83	74.00	-2.17	62.69	3	Vertical	19	2.05	-	33.55	5.97	30.38
AV	5.1488G	50.45	54.00	-3.55	41.31	3	Vertical	19	2.05	-	33.55	5.97	30.38
PK	5.1844G	115.09	Inf	-Inf	105.92	3	Vertical	19	2.05	-	33.58	5.99	30.40
AV	5.1784G	102.94	Inf	-Inf	93.76	3	Vertical	19	2.05	-	33.58	5.99	30.39

802.11ac VHT20-BF_Nss1,(MCS0)_4TX

17/01/2020

5180MHz_TX

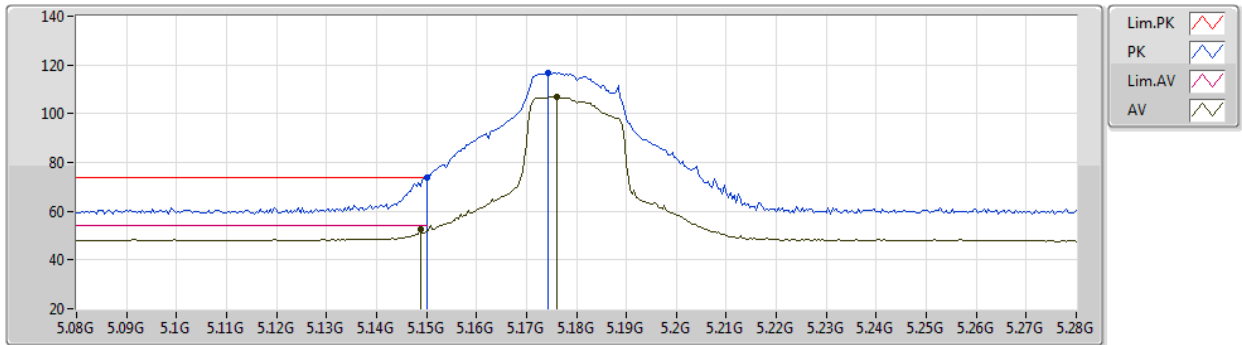


EUT Y_4TX
02-D-J-5-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.15G	73.76	74.00	-0.24	64.62	3	Horizontal	301	1.80	-	33.55	5.97	30.38
AV	5.1488G	52.52	54.00	-1.48	43.38	3	Horizontal	301	1.80	-	33.55	5.97	30.38
PK	5.1744G	116.78	Inf	-Inf	107.61	3	Horizontal	301	1.80	-	33.57	5.99	30.39
AV	5.176G	106.89	Inf	-Inf	97.71	3	Horizontal	301	1.80	-	33.58	5.99	30.39

802.11ac VHT20-BF_Nss1,(MCS0)_4TX

17/01/2020

5180MHz_TX

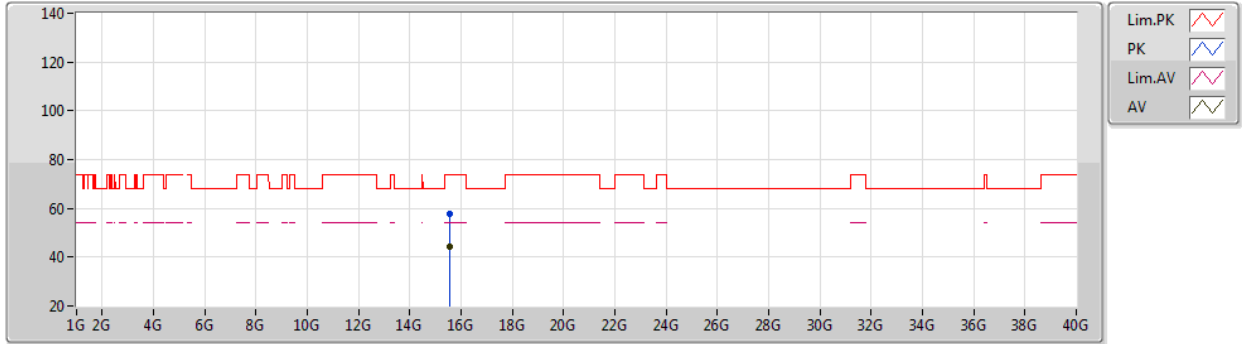


EUT Y_4TX
02-D-J-5
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.5503G	57.60	74.00	-16.40	41.63	3	Vertical	158	2.32	-	38.70	9.25	31.98
AV	15.554G	44.53	54.00	-9.47	28.57	3	Vertical	158	2.32	-	38.69	9.25	31.98

802.11ac VHT20-BF_Nss1,(MCS0)_4TX

17/01/2020

5180MHz_TX

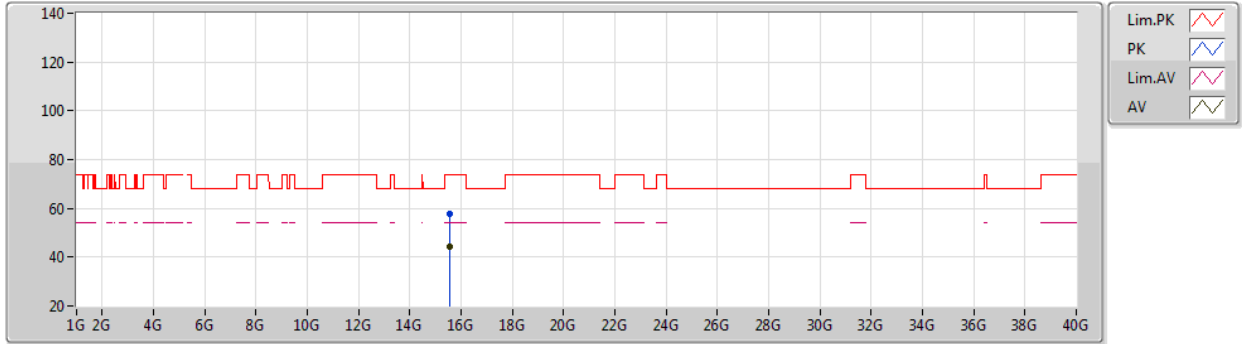


EUT Y_4TX
02-D-J-5
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.5617G	57.79	74.00	-16.21	41.84	3	Horizontal	162	1.43	-	38.67	9.26	31.98
AV	15.5556G	44.56	54.00	-9.44	28.60	3	Horizontal	162	1.43	-	38.69	9.25	31.98

802.11ac VHT20-BF_Nss1,(MCS0)_4TX

17/01/2020

5200MHz_TX

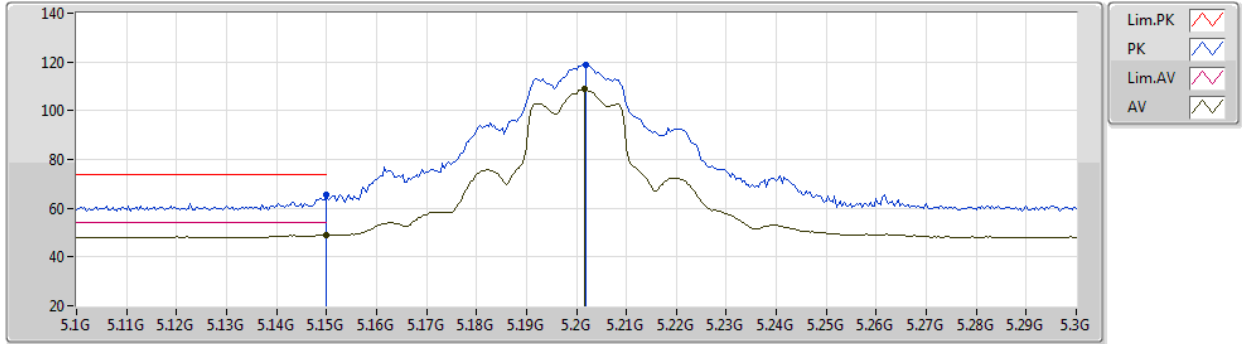


EUT Y_4TX
02-D-J-5-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.15G	65.39	74.00	-8.61	56.25	3	Vertical	66	1.67	-	33.55	5.97	30.38
AV	5.15G	48.92	54.00	-5.08	39.78	3	Vertical	66	1.67	-	33.55	5.97	30.38
PK	5.202G	118.93	Inf	-Inf	109.73	3	Vertical	66	1.67	-	33.60	6.00	30.40
AV	5.2016G	108.85	Inf	-Inf	99.65	3	Vertical	66	1.67	-	33.60	6.00	30.40

802.11ac VHT20-BF_Nss1,(MCS0)_4TX

17/01/2020

5200MHz_TX

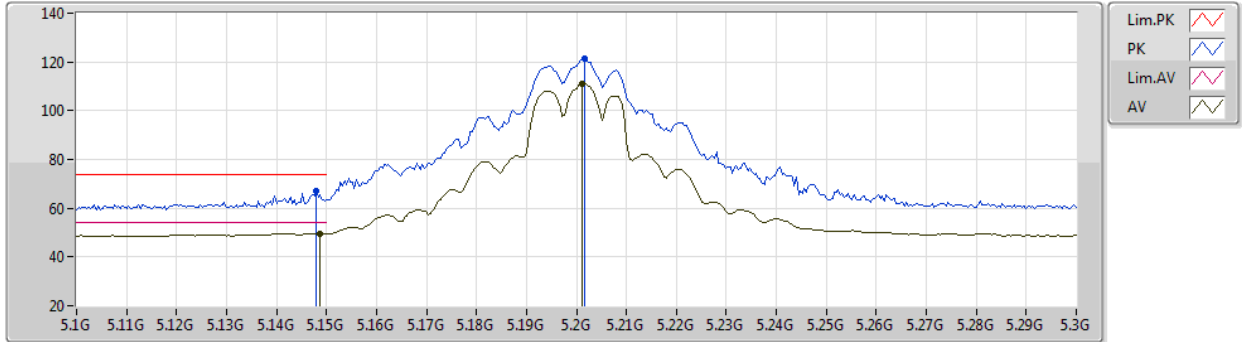


EUT Y_4TX
02-D-J-5-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.148G	66.89	74.00	-7.11	57.75	3	Horizontal	159	1.85	-	33.55	5.97	30.38
AV	5.1488G	49.69	54.00	-4.31	40.55	3	Horizontal	159	1.85	-	33.55	5.97	30.38
PK	5.2016G	121.38	Inf	-Inf	112.18	3	Horizontal	159	1.85	-	33.60	6.00	30.40
AV	5.2012G	111.15	Inf	-Inf	101.95	3	Horizontal	159	1.85	-	33.60	6.00	30.40

802.11ac VHT20-BF_Nss1,(MCS0)_4TX

17/01/2020

5200MHz_TX

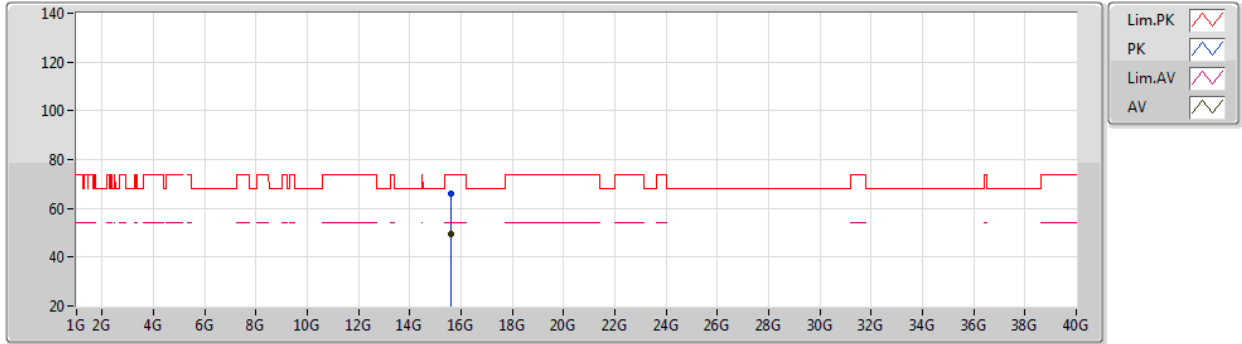


EUT Y_4TX
02-D-J-5
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.6058G	66.15	74.00	-7.85	50.33	3	Vertical	270	2.19	-	38.54	9.27	31.99
AV	15.6054G	49.70	54.00	-4.30	33.88	3	Vertical	270	2.19	-	38.54	9.27	31.99

802.11ac VHT20-BF_Nss1,(MCS0)_4TX

17/01/2020

5200MHz_TX

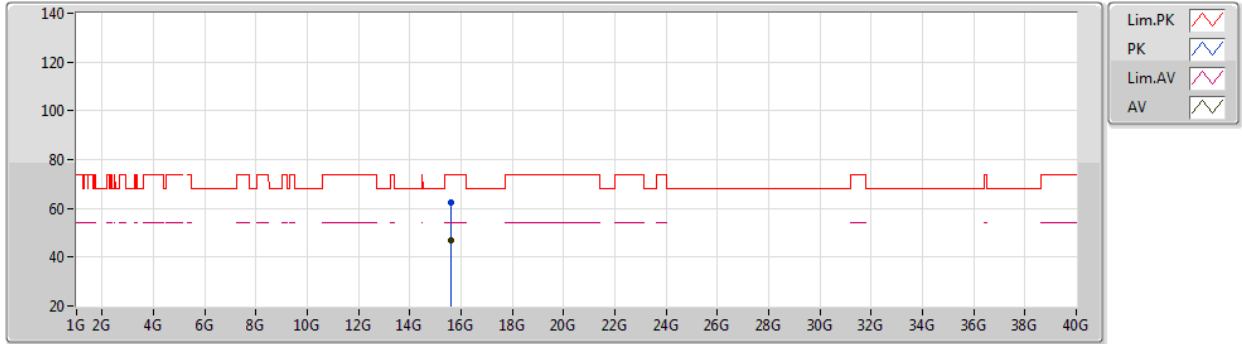


EUT Y_4TX
02-D-J-5
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.5989G	62.66	74.00	-11.34	46.82	3	Horizontal	157	1.80	-	38.56	9.27	31.99
AV	15.5977G	47.13	54.00	-6.87	31.28	3	Horizontal	157	1.80	-	38.57	9.27	31.99

802.11ac VHT20-BF_Nss1,(MCS0)_4TX

17/01/2020

5240MHz_TX

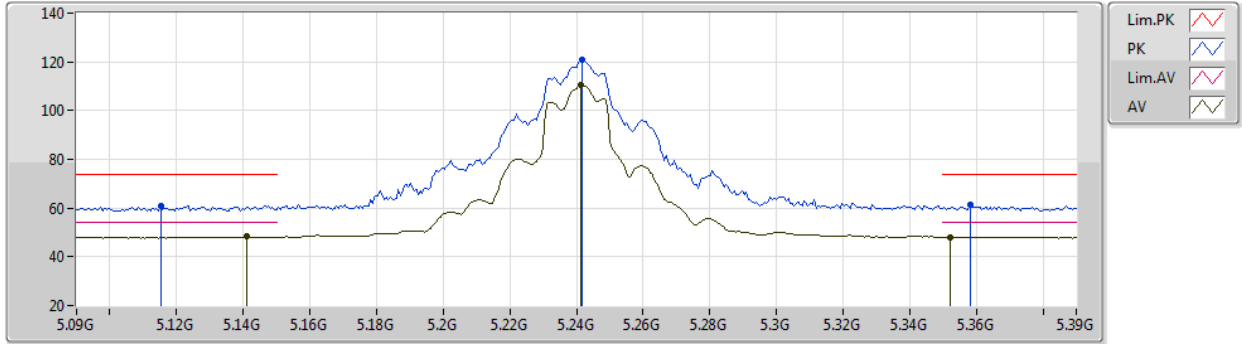


EUT Y_4TX
02-D-J-5-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1152G	60.98	74.00	-13.02	51.87	3	Vertical	66	1.59	-	33.52	5.96	30.37
AV	5.141G	48.19	54.00	-5.81	39.06	3	Vertical	66	1.59	-	33.54	5.97	30.38
PK	5.2418G	120.73	Inf	-Inf	111.45	3	Vertical	66	1.59	-	33.68	6.02	30.42
AV	5.2412G	110.53	Inf	-Inf	101.25	3	Vertical	66	1.59	-	33.68	6.02	30.42
PK	5.3582G	61.28	74.00	-12.72	51.80	3	Vertical	66	1.59	-	33.86	6.08	30.46
AV	5.3522G	48.16	54.00	-5.84	38.69	3	Vertical	66	1.59	-	33.85	6.08	30.46

802.11ac VHT20-BF_Nss1,(MCS0)_4TX

17/01/2020

5240MHz_TX

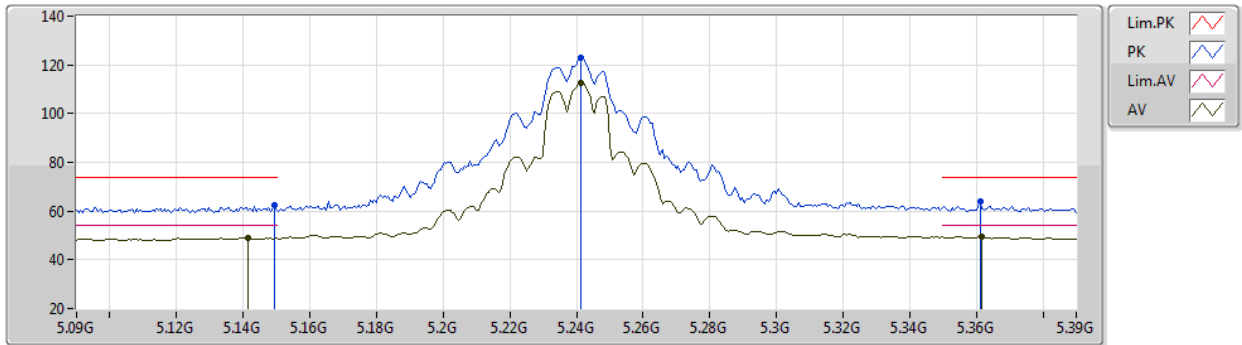


EUT Y_4TX
02-D-J-5-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1494G	62.24	74.00	-11.76	53.10	3	Horizontal	158	1.83	-	33.55	5.97	30.38
AV	5.1416G	48.91	54.00	-5.09	39.78	3	Horizontal	158	1.83	-	33.54	5.97	30.38
PK	5.2412G	123.05	Inf	-Inf	113.77	3	Horizontal	158	1.83	-	33.68	6.02	30.42
AV	5.2412G	112.81	Inf	-Inf	103.53	3	Horizontal	158	1.83	-	33.68	6.02	30.42
PK	5.3612G	63.79	74.00	-10.21	54.31	3	Horizontal	158	1.83	-	33.86	6.08	30.46
AV	5.3618G	49.42	54.00	-4.58	39.94	3	Horizontal	158	1.83	-	33.86	6.08	30.46

802.11ac VHT20-BF_Nss1,(MCS0)_4TX

17/01/2020

5240MHz_TX

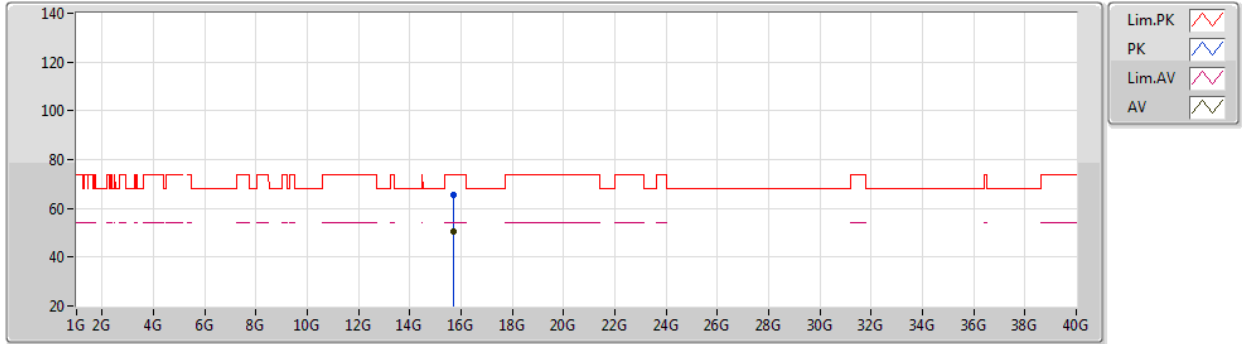


EUT Y_4TX
02-D-J-5
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.7236G	65.35	74.00	-8.65	49.86	3	Vertical	270	2.23	-	38.20	9.31	32.02
AV	15.7247G	50.30	54.00	-3.70	34.81	3	Vertical	270	2.23	-	38.20	9.31	32.02

802.11ac VHT20-BF_Nss1,(MCS0)_4TX

17/01/2020

5240MHz_TX

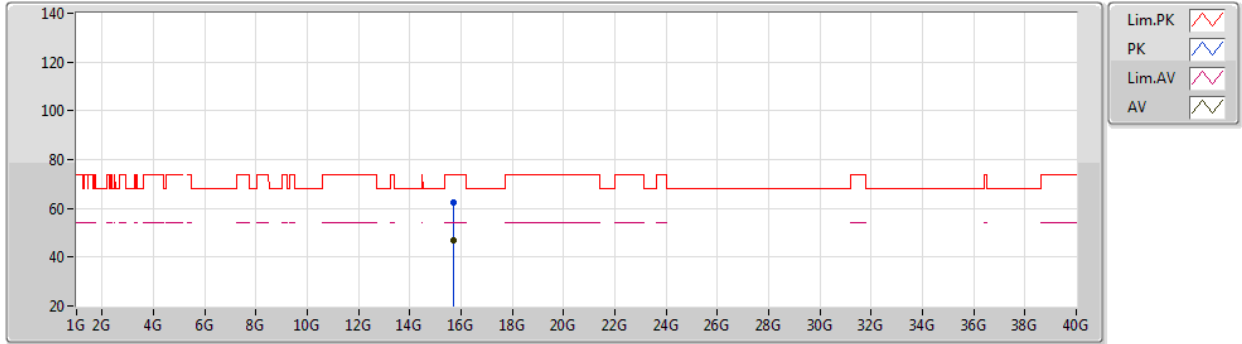


EUT Y_4TX
02-D-J-5
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.7194G	62.45	74.00	-11.55	46.95	3	Horizontal	156	1.66	-	38.21	9.31	32.02
AV	15.719G	46.98	54.00	-7.02	31.48	3	Horizontal	156	1.66	-	38.21	9.31	32.02

802.11ac VHT20-BF_Nss1,(MCS0)_4TX

17/01/2020

5745MHz_TX

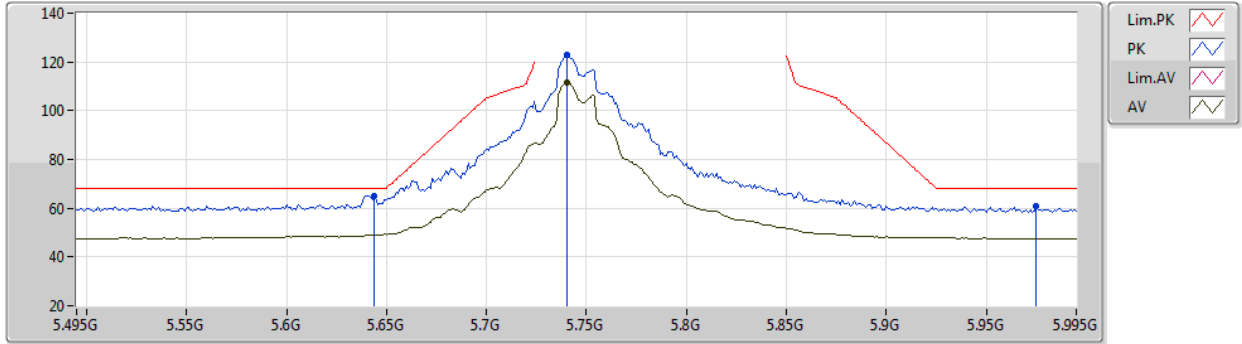


EUT Y_4TX
02-D-R-6-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.644G	64.93	68.20	-3.27	55.24	3	Vertical	317	1.71	-	33.91	6.32	30.54
PK	5.74G	122.82	Inf	-Inf	113.22	3	Vertical	317	1.71	-	33.80	6.37	30.57
AV	5.74G	111.69	Inf	-Inf	102.09	3	Vertical	317	1.71	-	33.80	6.37	30.57
PK	5.975G	60.92	68.20	-7.28	51.08	3	Vertical	317	1.71	-	34.15	6.31	30.62

802.11ac VHT20-BF_Nss1,(MCS0)_4TX

17/01/2020

5745MHz_TX

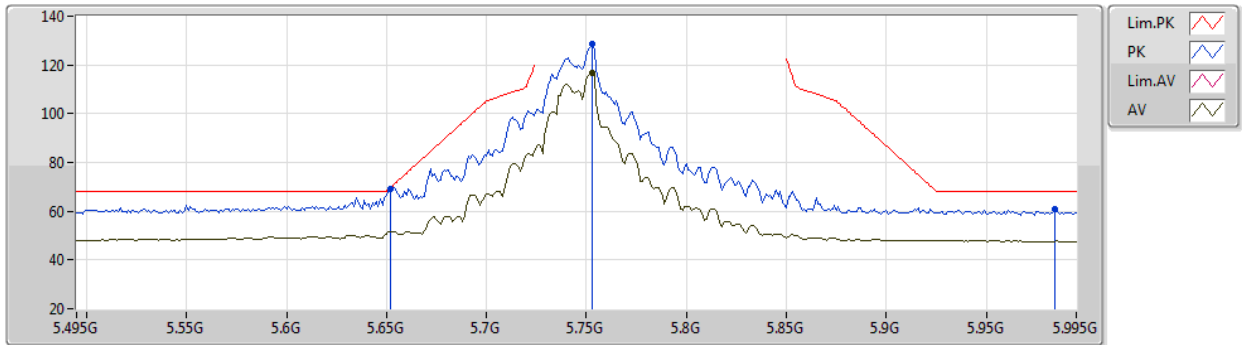


EUT Y_4TX
02-D-R-6-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.652G	69.12	69.68	-0.56	59.44	3	Horizontal	314	1.98	-	33.90	6.33	30.55
PK	5.753G	128.58	Inf	-Inf	118.97	3	Horizontal	314	1.98	-	33.80	6.38	30.57
AV	5.753G	116.82	Inf	-Inf	107.21	3	Horizontal	314	1.98	-	33.80	6.38	30.57
PK	5.984G	60.87	68.20	-7.33	51.02	3	Horizontal	314	1.98	-	34.17	6.31	30.63

802.11ac VHT20-BF_Nss1,(MCS0)_4TX

17/01/2020

5745MHz_TX

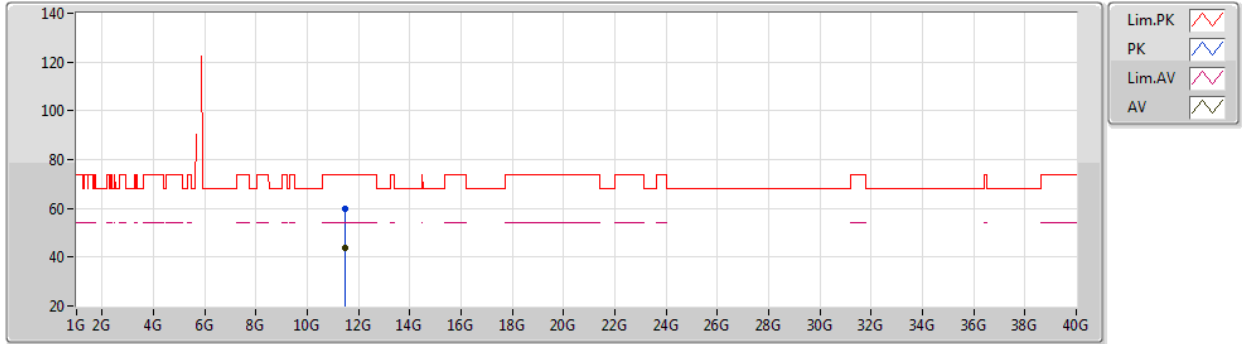


EUT Y_4TX
02-D-R-6
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.48752G	59.73	74.00	-14.27	43.69	3	Vertical	252	2.82	-	38.79	8.85	31.60
AV	11.48984G	43.54	54.00	-10.46	27.50	3	Vertical	252	2.82	-	38.79	8.85	31.60

802.11ac VHT20-BF_Nss1,(MCS0)_4TX

17/01/2020

5745MHz_TX

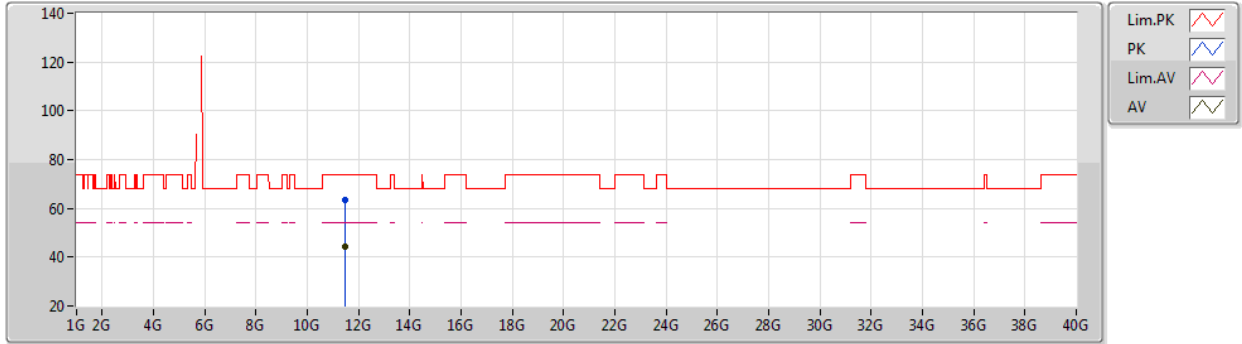


EUT Y_4TX
02-D-R-6
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.49888G	63.60	74.00	-10.40	47.55	3	Horizontal	145	1.71	-	38.80	8.85	31.60
AV	11.4972G	44.25	54.00	-9.75	28.20	3	Horizontal	145	1.71	-	38.80	8.85	31.60

802.11ac VHT20-BF_Nss1,(MCS0)_4TX

17/01/2020

5785MHz_TX

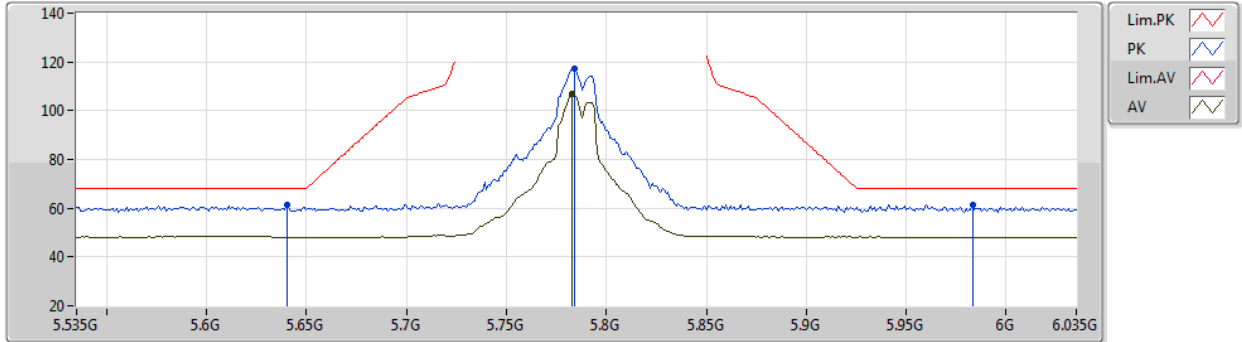


EUT Y_4TX
02-D-J-5-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.64G	61.16	68.20	-7.04	51.46	3	Vertical	26	2.79	-	33.92	6.32	30.54
PK	5.784G	117.34	Inf	-Inf	107.73	3	Vertical	26	2.79	-	33.80	6.39	30.58
AV	5.783G	106.73	Inf	-Inf	97.12	3	Vertical	26	2.79	-	33.80	6.39	30.58
PK	5.983G	61.51	68.20	-6.69	51.66	3	Vertical	26	2.79	-	34.17	6.31	30.63

802.11ac VHT20-BF_Nss1,(MCS0)_4TX

17/01/2020

5785MHz_TX

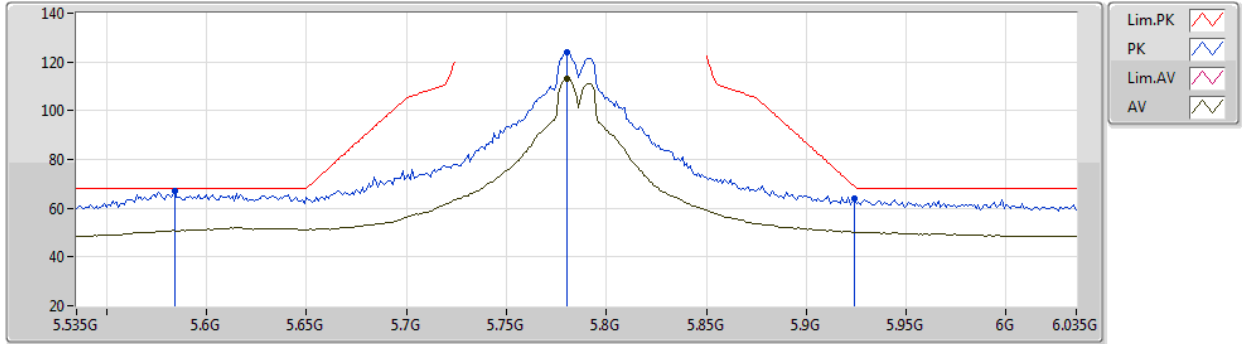


EUT Y_4TX
02-D-J-5-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.584G	66.97	68.20	-1.23	57.23	3	Horizontal	182	1.70	-	33.98	6.29	30.53
PK	5.78G	124.12	Inf	-Inf	114.51	3	Horizontal	182	1.70	-	33.80	6.39	30.58
AV	5.78G	113.31	Inf	-Inf	103.70	3	Horizontal	182	1.70	-	33.80	6.39	30.58
PK	5.924G	64.19	68.94	-4.75	54.41	3	Horizontal	182	1.70	-	34.05	6.34	30.61

802.11ac VHT20-BF_Nss1,(MCS0)_4TX

17/01/2020

5785MHz_TX

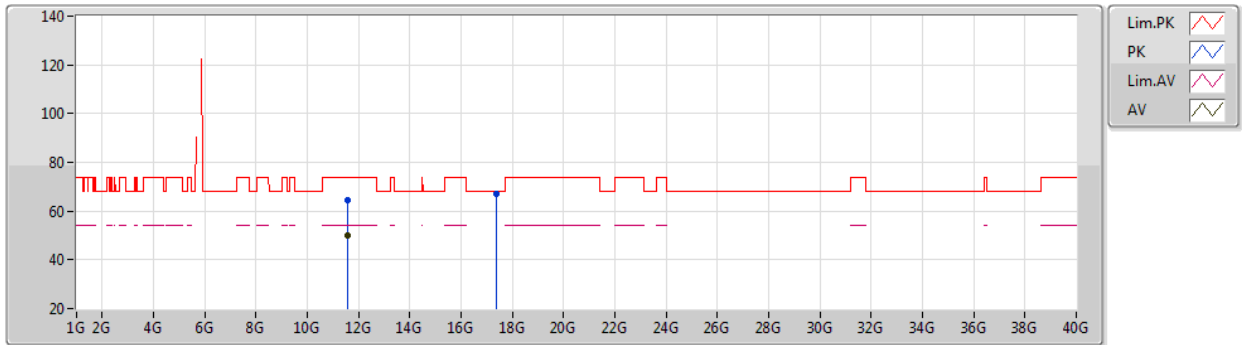


EUT Y_4TX
02-D-J-5
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.56896G	64.24	74.00	-9.76	48.14	3	Vertical	253	2.44	-	38.86	8.87	31.63
AV	11.56952G	49.78	54.00	-4.22	33.67	3	Vertical	253	2.44	-	38.86	8.88	31.63
PK	17.35396G	66.86	68.20	-1.34	45.40	3	Vertical	276	2.64	-	43.08	10.22	31.84

802.11ac VHT20-BF_Nss1,(MCS0)_4TX

17/01/2020

5785MHz_TX

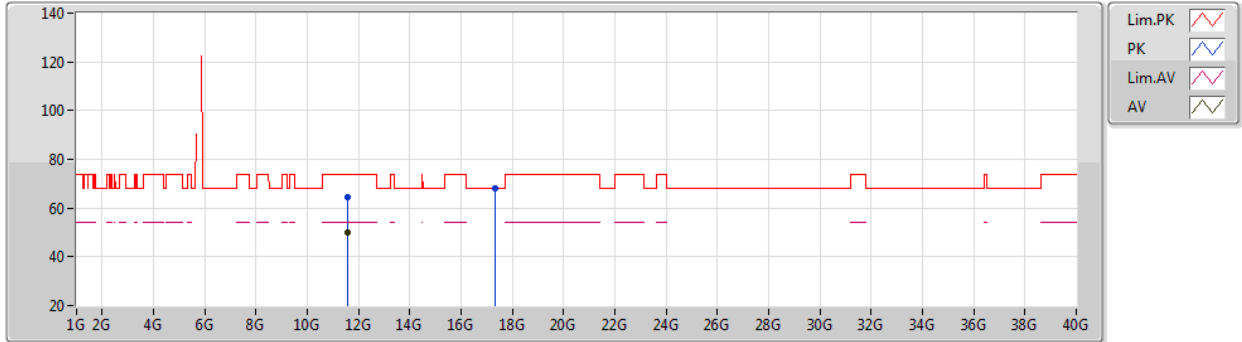


EUT Y_4TX
02-D-J-5
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.56904G	64.61	74.00	-9.39	48.50	3	Horizontal	66	1.65	-	38.86	8.88	31.63
AV	11.56944G	50.10	54.00	-3.90	33.99	3	Horizontal	66	1.65	-	38.86	8.88	31.63
PK	17.34836G	68.02	68.20	-0.18	46.59	3	Horizontal	312	2.88	-	43.05	10.22	31.84

802.11ac VHT20-BF_Nss1,(MCS0)_4TX

17/01/2020

5825MHz_TX

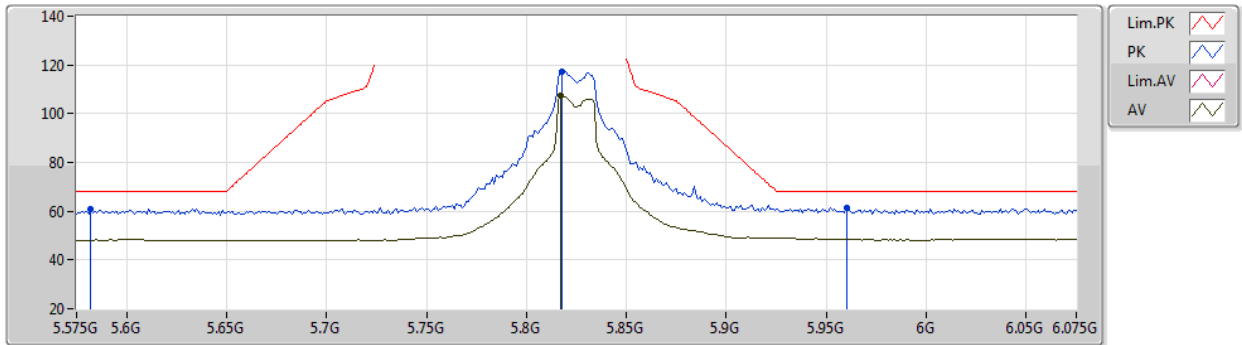


EUT Y_4TX
02-D-J-5-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.582G	60.78	68.20	-7.42	51.05	3	Vertical	293	1.80	-	33.98	6.28	30.53
PK	5.818G	117.22	Inf	-Inf	107.58	3	Vertical	293	1.80	-	33.84	6.39	30.59
AV	5.817G	107.38	Inf	-Inf	97.75	3	Vertical	293	1.80	-	33.83	6.39	30.59
PK	5.96G	61.36	68.20	-6.84	51.54	3	Vertical	293	1.80	-	34.12	6.32	30.62

802.11ac VHT20-BF_Nss1,(MCS0)_4TX

17/01/2020

5825MHz_TX

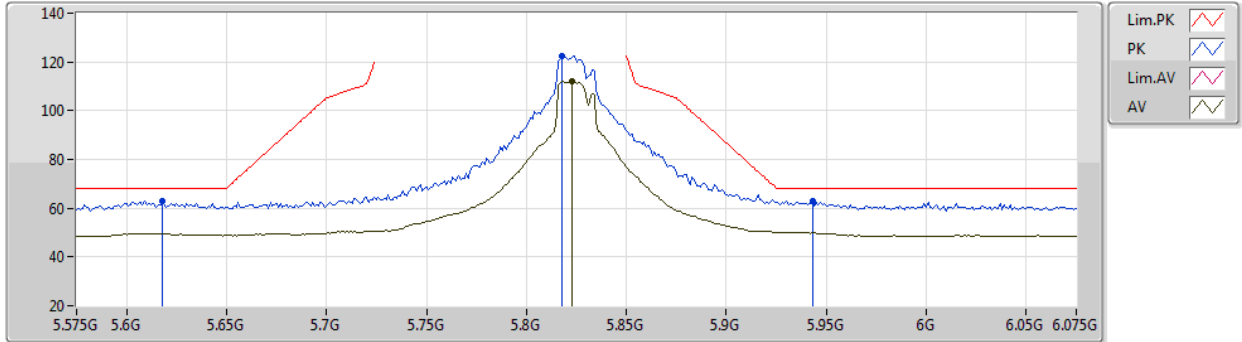


EUT Y_4TX
02-D-J-5-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.618G	62.93	68.20	-5.27	53.20	3	Horizontal	309	1.35	-	33.96	6.31	30.54
PK	5.818G	122.55	Inf	-Inf	112.91	3	Horizontal	309	1.35	-	33.84	6.39	30.59
AV	5.823G	112.06	Inf	-Inf	102.41	3	Horizontal	309	1.35	-	33.85	6.39	30.59
PK	5.943G	63.16	68.20	-5.04	53.36	3	Horizontal	309	1.35	-	34.09	6.33	30.62

802.11ac VHT20-BF_Nss1,(MCS0)_4TX

17/01/2020

5825MHz_TX

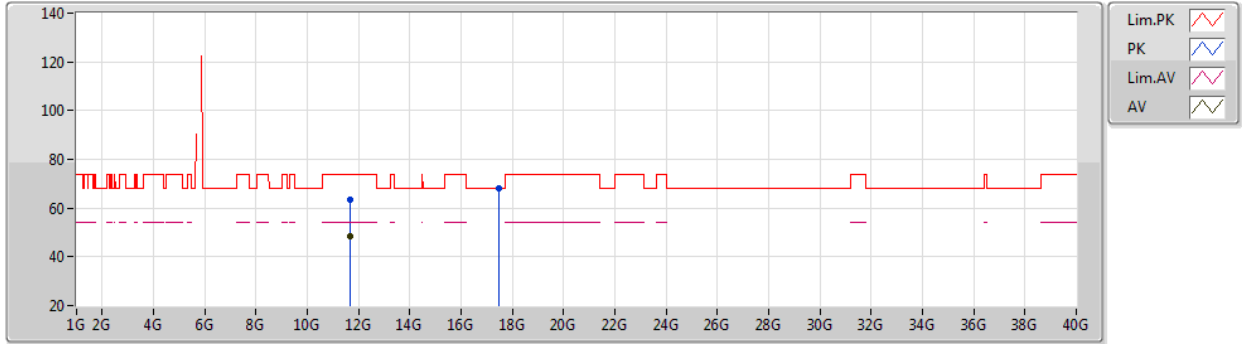


EUT Y_4TX
02-D-J-5
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.652G	63.57	74.00	-10.43	47.40	3	Vertical	256	2.49	-	38.92	8.90	31.65
AV	11.64976G	48.67	54.00	-5.33	32.50	3	Vertical	256	2.49	-	38.92	8.90	31.65
PK	17.47436G	68.16	68.20	-0.04	46.03	3	Vertical	276	2.60	-	43.71	10.29	31.87

802.11ac VHT20-BF_Nss1,(MCS0)_4TX

17/01/2020

5825MHz_TX

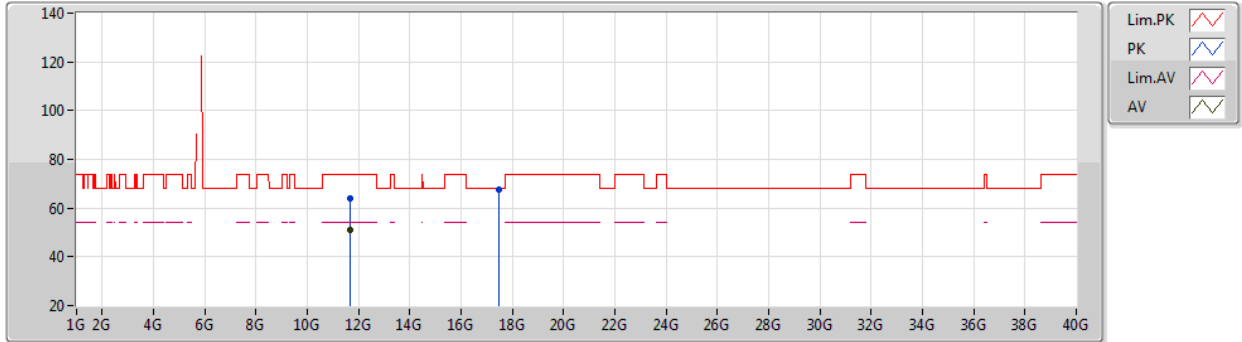


EUT Y_4TX
02-D-J-5
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.6488G	64.15	74.00	-9.85	47.98	3	Horizontal	132	1.17	-	38.92	8.90	31.65
AV	11.64992G	50.87	54.00	-3.13	34.70	3	Horizontal	132	1.17	-	38.92	8.90	31.65
PK	17.47444G	67.84	68.20	-0.36	45.71	3	Horizontal	111	1.14	-	43.71	10.29	31.87

802.11ac VHT40-BF_Nss1,(MCS0)_4TX

17/01/2020

5190MHz_TX

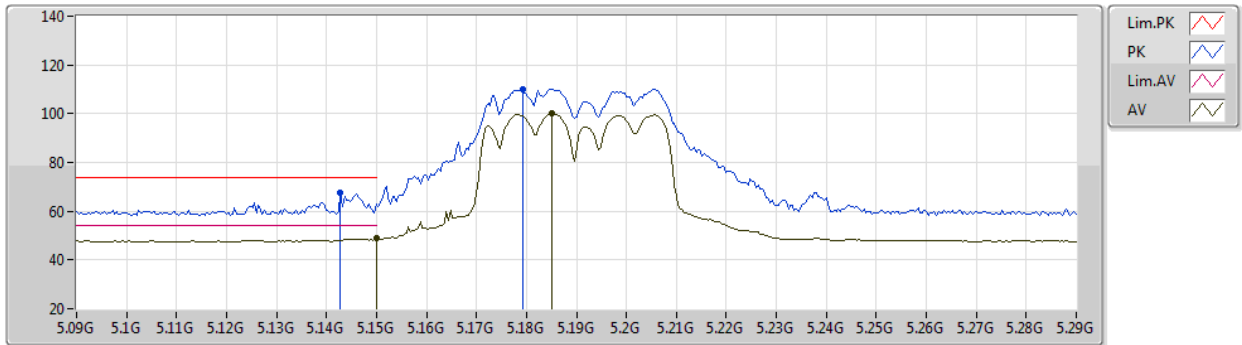


EUT Y_4TX
02-D-G-2-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1428G	67.64	74.00	-6.36	58.51	3	Vertical	247	3.00	-	33.54	5.97	30.38
AV	5.15G	48.83	54.00	-5.17	39.69	3	Vertical	247	3.00	-	33.55	5.97	30.38
PK	5.1792G	110.05	Inf	-Inf	100.87	3	Vertical	247	3.00	-	33.58	5.99	30.39
AV	5.1852G	99.99	Inf	-Inf	90.81	3	Vertical	247	3.00	-	33.59	5.99	30.40

802.11ac VHT40-BF_Nss1,(MCS0)_4TX

17/01/2020

5190MHz_TX

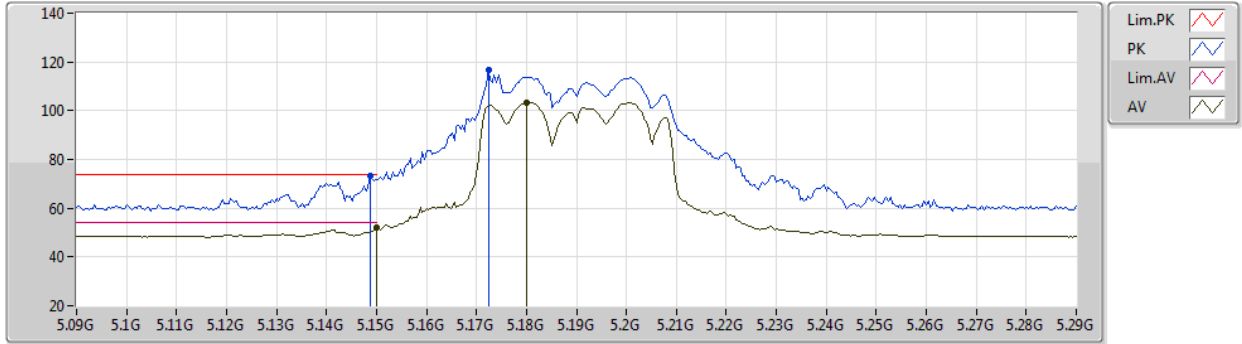


EUT Y_4TX
02-D-G-2-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1488G	73.23	74.00	-0.77	64.09	3	Horizontal	177	1.87	-	33.55	5.97	30.38
AV	5.15G	51.87	54.00	-2.13	42.73	3	Horizontal	177	1.87	-	33.55	5.97	30.38
PK	5.1724G	116.59	Inf	-Inf	107.42	3	Horizontal	177	1.87	-	33.57	5.99	30.39
AV	5.18G	103.48	Inf	-Inf	94.30	3	Horizontal	177	1.87	-	33.58	5.99	30.39

802.11ac VHT40-BF_Nss1,(MCS0)_4TX

17/01/2020

5190MHz_TX

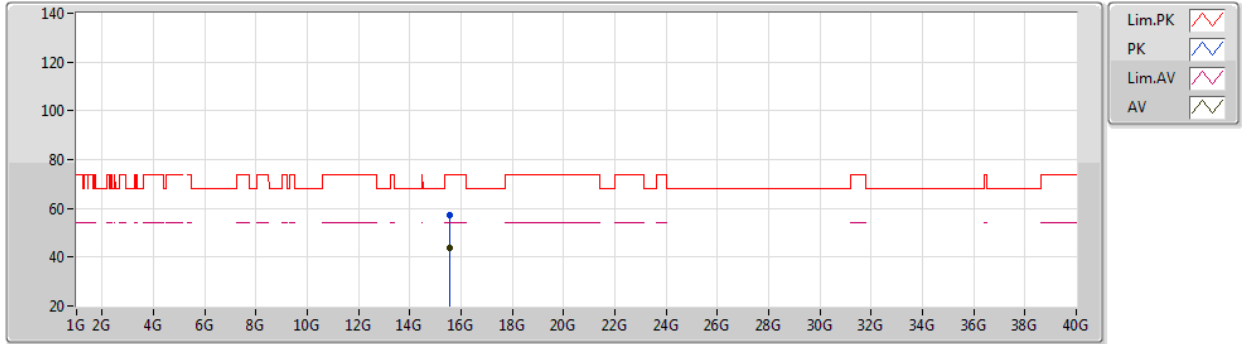


EUT Y_4TX
02-D-G-2
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.7704G	57.10	74.00	-16.90	41.20	3	Vertical	310	1.91	-	38.63	9.26	31.99
AV	15.57608G	44.00	54.00	-10.00	28.10	3	Vertical	310	1.91	-	38.63	9.26	31.99

802.11ac VHT40-BF_Nss1,(MCS0)_4TX

17/01/2020

5190MHz_TX

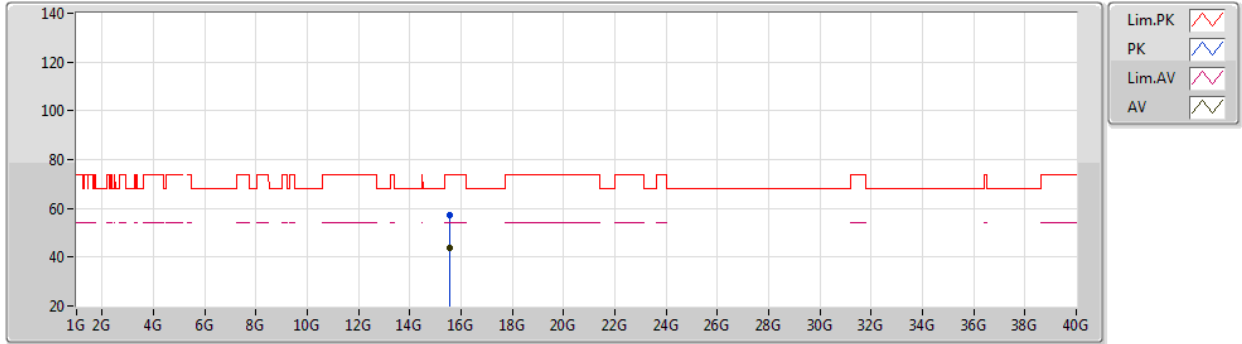


EUT Y_4TX
02-D-G-2
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.56764G	57.38	74.00	-16.62	41.45	3	Horizontal	176	1.54	-	38.65	9.26	31.98
AV	15.56468G	43.89	54.00	-10.11	27.95	3	Horizontal	176	1.54	-	38.66	9.26	31.98

802.11ac VHT40-BF_Nss1,(MCS0)_4TX

17/01/2020

5230MHz_TX

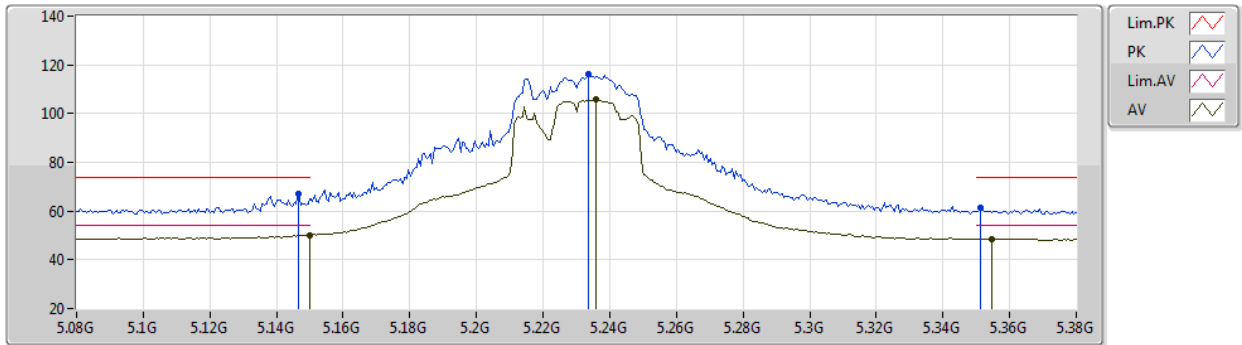


EUT Y_4TX
02-D-G-2-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1466G	67.08	74.00	-6.92	57.94	3	Vertical	258	2.24	-	33.55	5.97	30.38
AV	5.15G	50.22	54.00	-3.78	41.08	3	Vertical	258	2.24	-	33.55	5.97	30.38
PK	5.2336G	116.15	Inf	-Inf	106.87	3	Vertical	258	2.24	-	33.67	6.02	30.41
AV	5.236G	105.65	Inf	-Inf	96.37	3	Vertical	258	2.24	-	33.67	6.02	30.41
PK	5.3512G	61.41	74.00	-12.59	51.94	3	Vertical	258	2.24	-	33.85	6.08	30.46
AV	5.3548G	48.63	54.00	-5.37	39.16	3	Vertical	258	2.24	-	33.85	6.08	30.46

802.11ac VHT40-BF_Nss1,(MCS0)_4TX

17/01/2020

5230MHz_TX

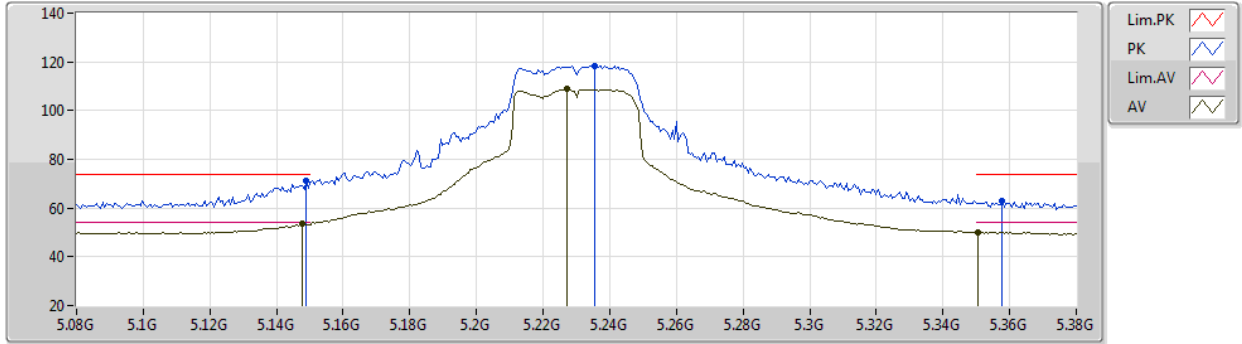


EUT Y_4TX
02-D-G-2-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.149G	70.98	74.00	-3.02	61.84	3	Horizontal	168	2.02	-	33.55	5.97	30.38
AV	5.1478G	53.53	54.00	-0.47	44.39	3	Horizontal	168	2.02	-	33.55	5.97	30.38
PK	5.2354G	118.51	Inf	-Inf	109.23	3	Horizontal	168	2.02	-	33.67	6.02	30.41
AV	5.227G	108.89	Inf	-Inf	99.64	3	Horizontal	168	2.02	-	33.65	6.01	30.41
PK	5.3578G	62.69	74.00	-11.31	53.21	3	Horizontal	168	2.02	-	33.86	6.08	30.46
AV	5.3506G	50.14	54.00	-3.86	40.67	3	Horizontal	168	2.02	-	33.85	6.08	30.46

802.11ac VHT40-BF_Nss1,(MCS0)_4TX

17/01/2020

5230MHz_TX

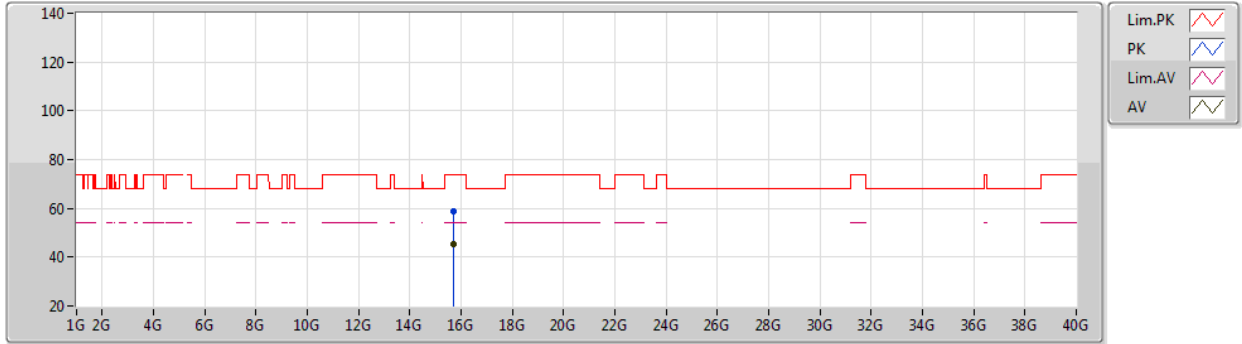


EUT Y_4TX
02-D-G-2
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.7G	58.57	74.00	-15.43	43.01	3	Vertical	286	1.00	-	38.27	9.30	32.01
AV	15.69908G	45.26	54.00	-8.74	29.70	3	Vertical	286	1.00	-	38.27	9.30	32.01

802.11ac VHT40-BF_Nss1,(MCS0)_4TX

17/01/2020

5230MHz_TX

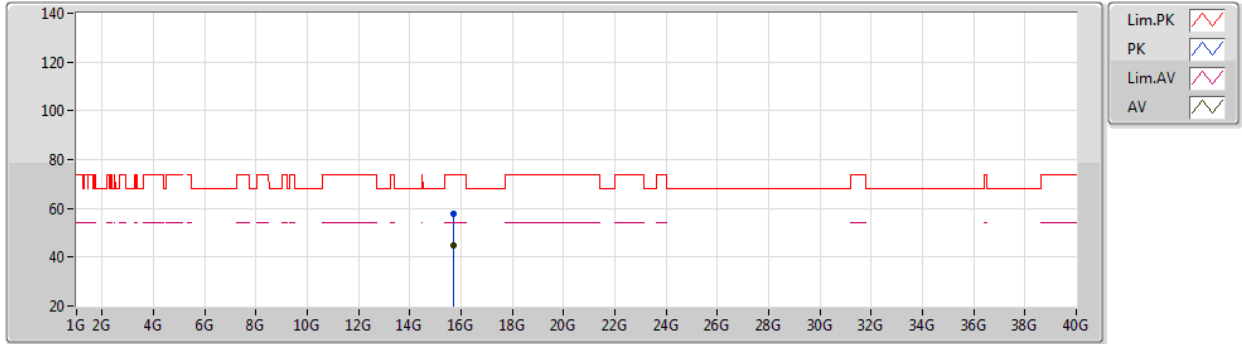


EUT Y_4TX
02-D-G-2
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.69772G	57.74	74.00	-16.26	42.17	3	Horizontal	275	1.78	-	38.28	9.30	32.01
AV	15.69936G	44.99	54.00	-9.01	29.43	3	Horizontal	275	1.78	-	38.27	9.30	32.01

802.11ac VHT40-BF_Nss1,(MCS0)_4TX

17/01/2020

5755MHz_TX

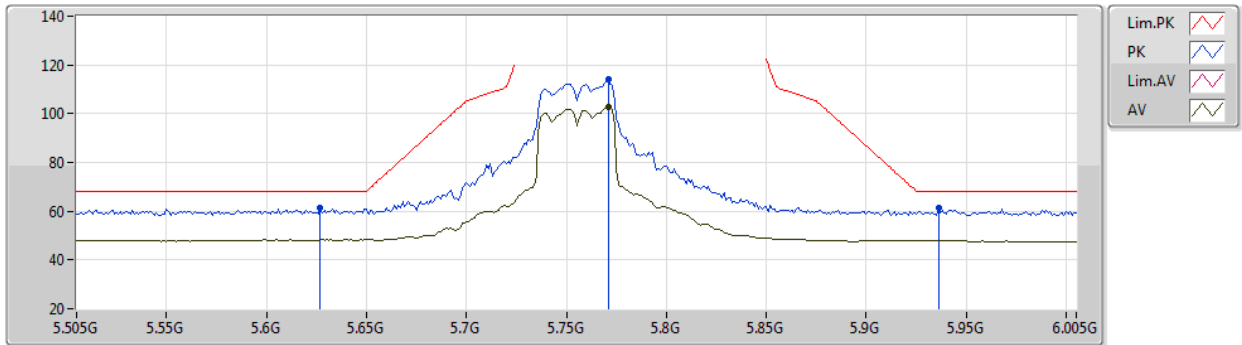


EUT Y_4TX
02-D-G-2-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.627G	61.21	68.20	-6.99	51.49	3	Vertical	24	2.19	-	33.95	6.31	30.54
PK	5.771G	113.89	Inf	-Inf	104.27	3	Vertical	24	2.19	-	33.80	6.39	30.57
AV	5.771G	103.00	Inf	-Inf	93.38	3	Vertical	24	2.19	-	33.80	6.39	30.57
PK	5.936G	61.17	68.20	-7.03	51.39	3	Vertical	24	2.19	-	34.07	6.33	30.62

802.11ac VHT40-BF_Nss1,(MCS0)_4TX

17/01/2020

5755MHz_TX

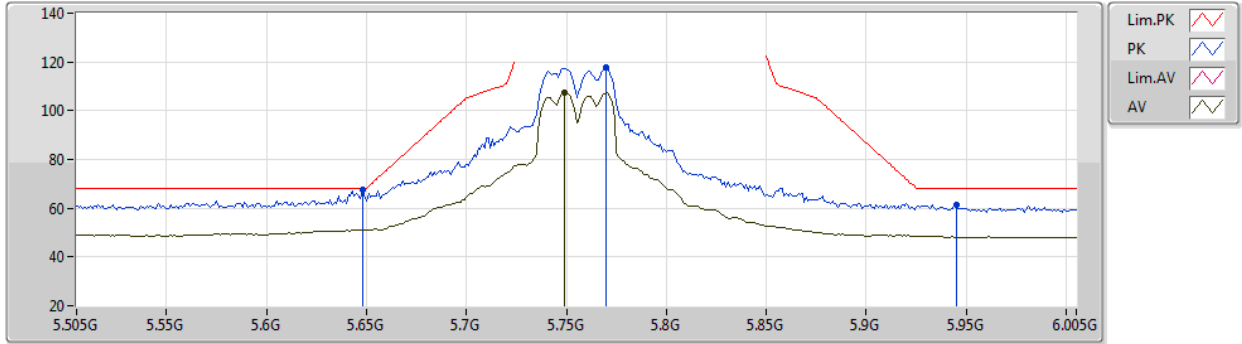


EUT Y_4TX
02-D-G-2-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.648G	67.71	68.20	-0.49	58.03	3	Horizontal	174	1.80	-	33.90	6.32	30.54
PK	5.77G	117.73	Inf	-Inf	108.11	3	Horizontal	174	1.80	-	33.80	6.39	30.57
AV	5.749G	107.57	Inf	-Inf	97.97	3	Horizontal	174	1.80	-	33.80	6.37	30.57
PK	5.945G	61.41	68.20	-6.79	51.61	3	Horizontal	174	1.80	-	34.09	6.33	30.62

802.11ac VHT40-BF_Nss1,(MCS0)_4TX

17/01/2020

5755MHz_TX

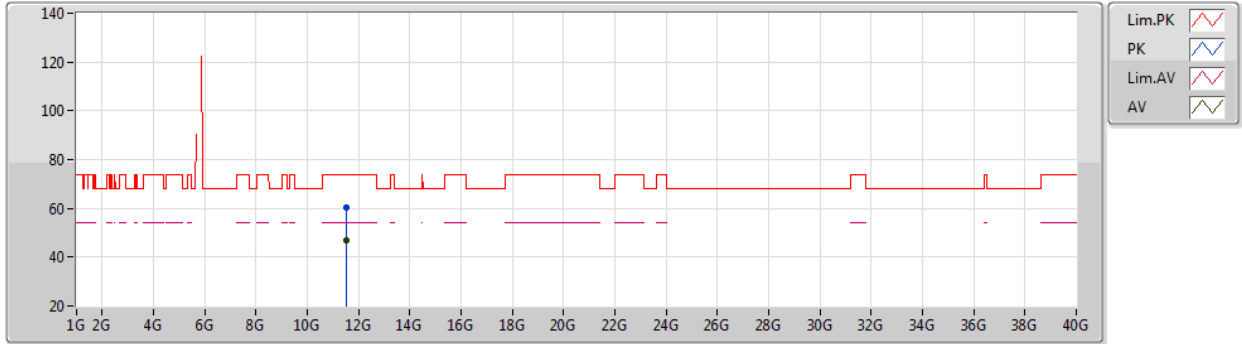


EUT Y_4TX
02-D-G-2
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.50992G	60.58	74.00	-13.42	44.52	3	Vertical	256	2.17	-	38.81	8.86	31.61
AV	11.51012G	46.76	54.00	-7.24	30.70	3	Vertical	256	2.17	-	38.81	8.86	31.61

802.11ac VHT40-BF_Nss1,(MCS0)_4TX

17/01/2020

5755MHz_TX

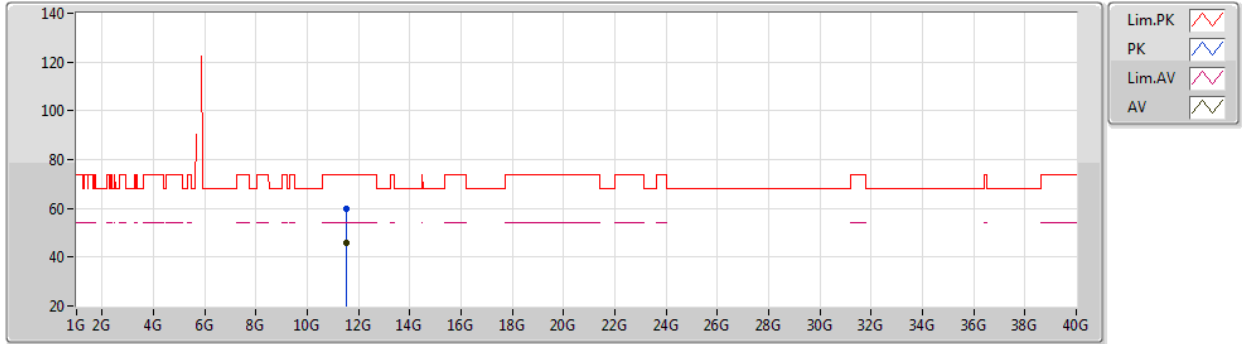


EUT Y_4TX
02-D-G-2
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.50984G	59.93	74.00	-14.07	43.87	3	Horizontal	53	1.76	-	38.81	8.86	31.61
AV	11.50896G	45.86	54.00	-8.14	29.80	3	Horizontal	53	1.76	-	38.81	8.86	31.61

802.11ac VHT40-BF_Nss1,(MCS0)_4TX

17/01/2020

5795MHz_TX

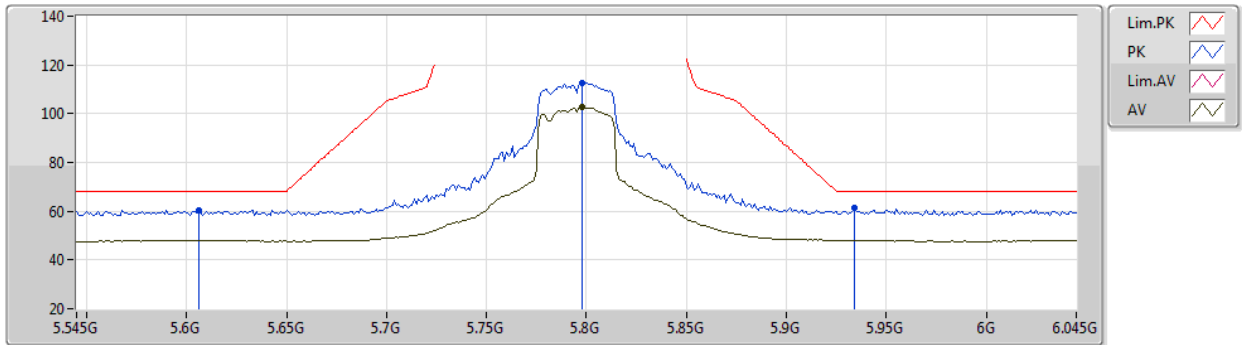


EUT Y_4TX
02-D-G-2-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.606G	60.55	68.20	-7.65	50.79	3	Vertical	351	1.79	-	33.99	6.30	30.53
PK	5.798G	112.71	Inf	-Inf	103.09	3	Vertical	351	1.79	-	33.80	6.40	30.58
AV	5.798G	102.71	Inf	-Inf	93.09	3	Vertical	351	1.79	-	33.80	6.40	30.58
PK	5.934G	61.19	68.20	-7.01	51.41	3	Vertical	351	1.79	-	34.07	6.33	30.62

802.11ac VHT40-BF_Nss1,(MCS0)_4TX

17/01/2020

5795MHz_TX

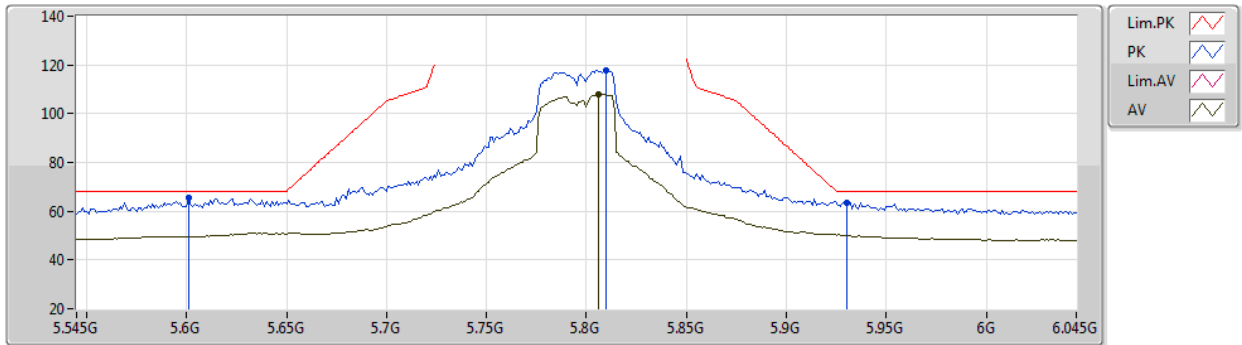


EUT Y_4TX
02-D-G-2-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.601G	65.36	68.20	-2.84	55.59	3	Horizontal	180	1.87	-	34.00	6.30	30.53
PK	5.81G	117.76	Inf	-Inf	108.12	3	Horizontal	180	1.87	-	33.82	6.40	30.58
AV	5.806G	108.10	Inf	-Inf	98.47	3	Horizontal	180	1.87	-	33.81	6.40	30.58
PK	5.93G	63.39	68.20	-4.81	53.62	3	Horizontal	180	1.87	-	34.06	6.33	30.62

802.11ac VHT40-BF_Nss1,(MCS0)_4TX

17/01/2020

5795MHz_TX

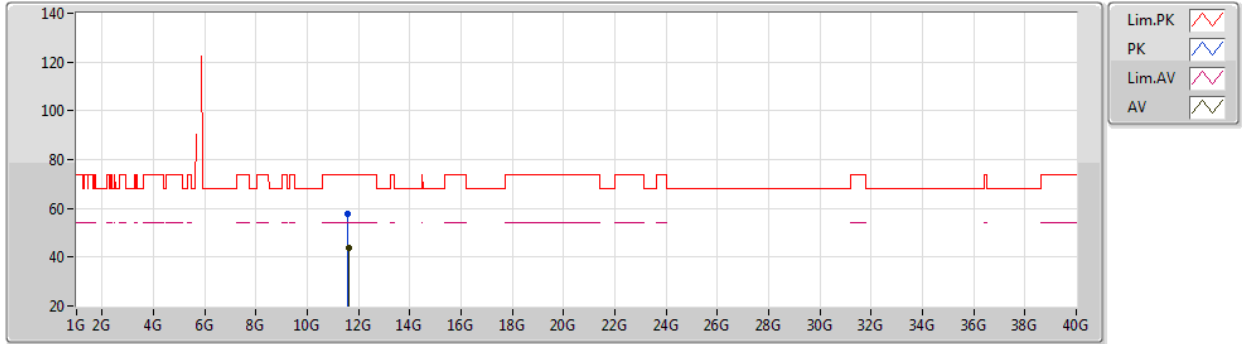


EUT Y_4TX
02-D-G-2
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.58868G	57.83	74.00	-16.17	41.71	3	Vertical	255	2.95	-	38.87	8.88	31.63
AV	11.59988G	44.00	54.00	-10.00	27.88	3	Vertical	255	2.95	-	38.88	8.88	31.64

802.11ac VHT40-BF_Nss1,(MCS0)_4TX

17/01/2020

5795MHz_TX

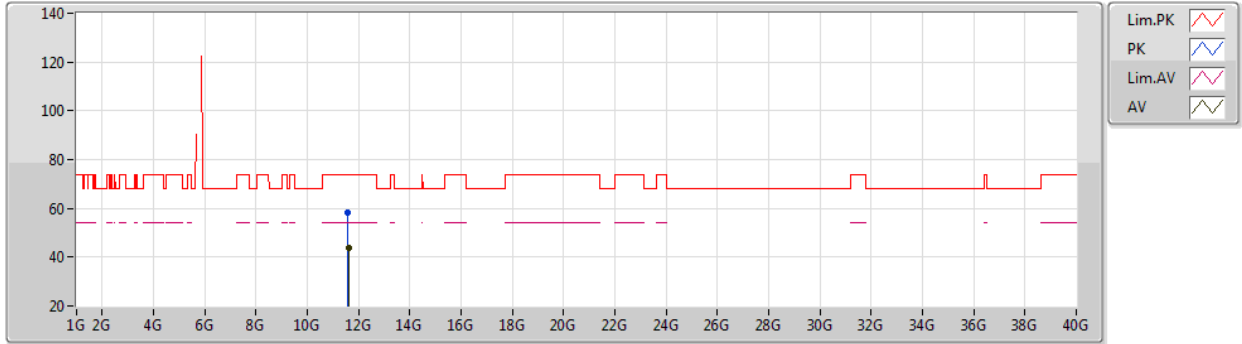


EUT Y_4TX
02-D-G-2
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.58888G	58.51	74.00	-15.49	42.39	3	Horizontal	30	1.84	-	38.87	8.88	31.63
AV	11.59928G	43.89	54.00	-10.11	27.77	3	Horizontal	30	1.84	-	38.88	8.88	31.64

802.11ac VHT80-BF_Nss1,(MCS0)_4TX

17/01/2020

5210MHz_TX

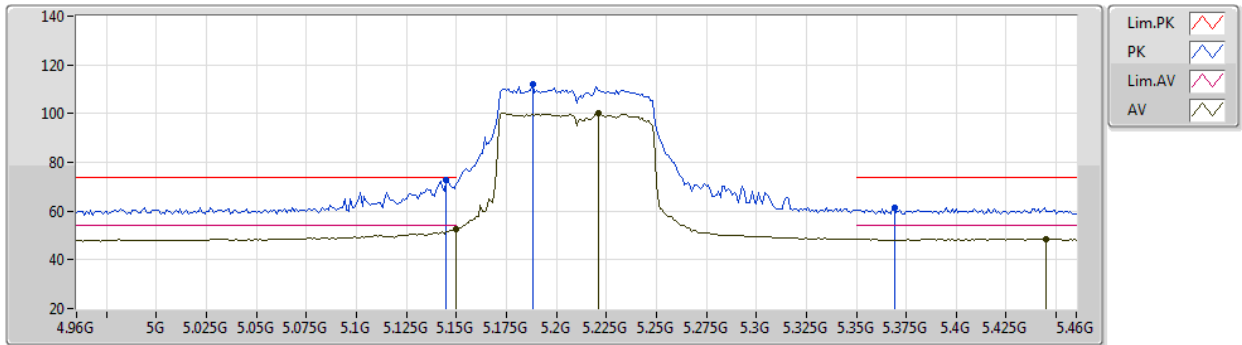


EUT Y_4TX
02-D-G-2-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.145G	72.97	74.00	-1.03	63.83	3	Vertical	136	2.48	-	33.55	5.97	30.38
AV	5.15G	52.52	54.00	-1.48	43.38	3	Vertical	136	2.48	-	33.55	5.97	30.38
PK	5.188G	112.10	Inf	-Inf	102.92	3	Vertical	136	2.48	-	33.59	5.99	30.40
AV	5.221G	100.36	Inf	-Inf	91.12	3	Vertical	136	2.48	-	33.64	6.01	30.41
PK	5.369G	61.42	74.00	-12.58	51.93	3	Vertical	136	2.48	-	33.87	6.08	30.46
AV	5.445G	48.49	54.00	-5.51	38.93	3	Vertical	136	2.48	-	33.90	6.15	30.49

802.11ac VHT80-BF_Nss1,(MCS0)_4TX

17/01/2020

5210MHz_TX

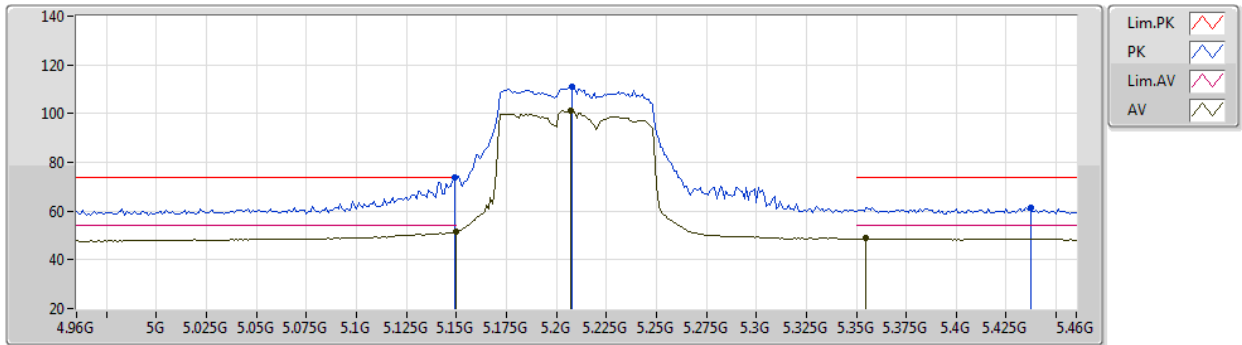


EUT Y_4TX
02-D-G-2-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.149G	73.86	74.00	-0.14	64.72	3	Horizontal	167	2.28	-	33.55	5.97	30.38
AV	5.15G	51.77	54.00	-2.23	42.63	3	Horizontal	167	2.28	-	33.55	5.97	30.38
PK	5.208G	111.17	Inf	-Inf	101.95	3	Horizontal	167	2.28	-	33.62	6.00	30.40
AV	5.207G	100.99	Inf	-Inf	91.78	3	Horizontal	167	2.28	-	33.61	6.00	30.40
PK	5.437G	61.48	74.00	-12.52	51.92	3	Horizontal	167	2.28	-	33.90	6.14	30.48
AV	5.355G	48.72	54.00	-5.28	39.25	3	Horizontal	167	2.28	-	33.85	6.08	30.46

802.11ac VHT80-BF_Nss1,(MCS0)_4TX

17/01/2020

5210MHz_TX

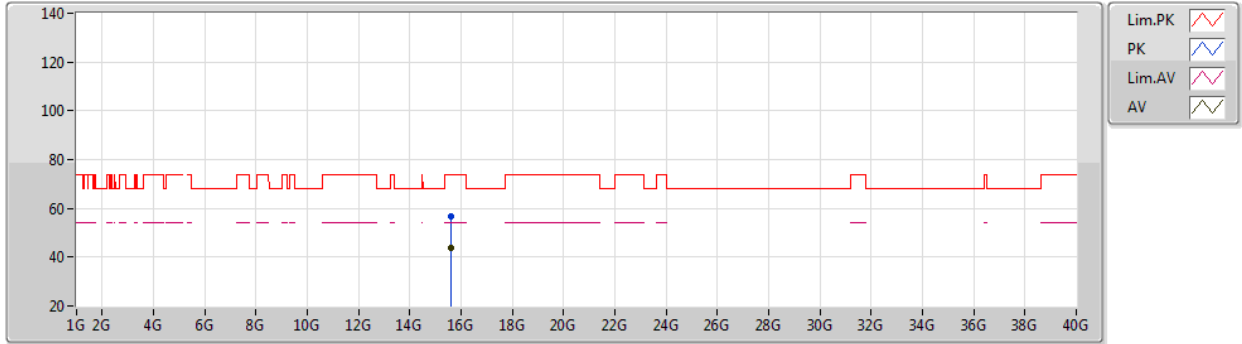


EUT Y_4TX
02-D-G-2
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.6282G	56.89	74.00	-17.11	41.13	3	Vertical	104	1.81	-	38.48	9.28	32.00
AV	15.62428G	43.84	54.00	-10.16	28.07	3	Vertical	104	1.81	-	38.49	9.28	32.00

802.11ac VHT80-BF_Nss1,(MCS0)_4TX

17/01/2020

5210MHz_TX

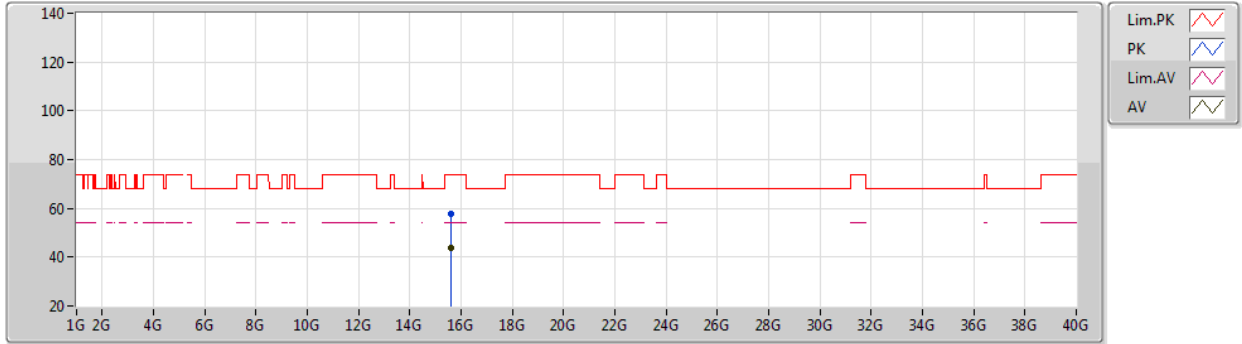


EUT Y_4TX
02-D-G-2
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.6214G	57.87	74.00	-16.13	42.09	3	Horizontal	326	2.06	-	38.50	9.28	32.00
AV	15.62244G	43.80	54.00	-10.20	28.03	3	Horizontal	326	2.06	-	38.49	9.28	32.00

802.11ac VHT80-BF_Nss1,(MCS0)_4TX

17/01/2020

5775MHz_TX

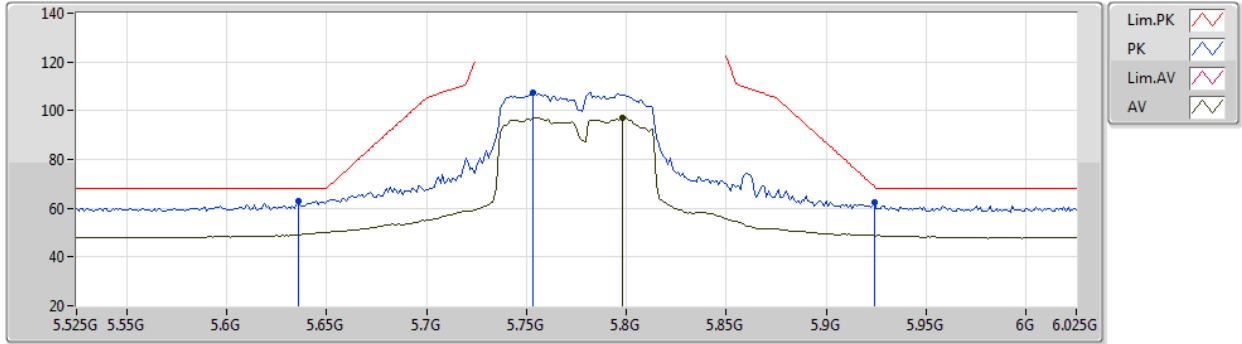


EUT Y_4TX
02-D-G-2-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.636G	63.01	68.20	-5.19	53.30	3	Vertical	345	2.16	-	33.93	6.32	30.54
PK	5.753G	107.34	Inf	-Inf	97.73	3	Vertical	345	2.16	-	33.80	6.38	30.57
AV	5.798G	97.15	Inf	-Inf	87.53	3	Vertical	345	2.16	-	33.80	6.40	30.58
PK	5.924G	62.45	68.94	-6.49	52.67	3	Vertical	345	2.16	-	34.05	6.34	30.61

802.11ac VHT80-BF_Nss1,(MCS0)_4TX

17/01/2020

5775MHz_TX

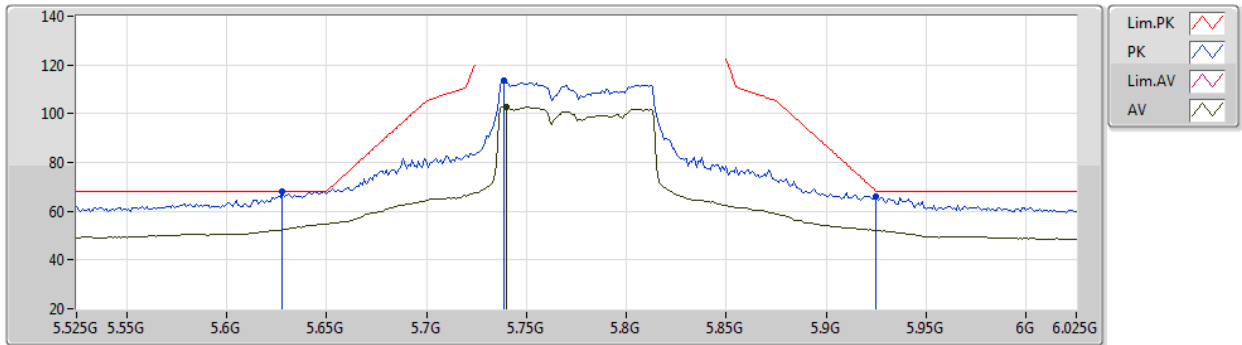


EUT Y_4TX
02-D-G-2-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.628G	68.04	68.20	-0.16	58.33	3	Horizontal	185	1.80	-	33.94	6.31	30.54
PK	5.739G	113.71	Inf	-Inf	104.11	3	Horizontal	185	1.80	-	33.80	6.37	30.57
AV	5.74G	102.90	Inf	-Inf	93.30	3	Horizontal	185	1.80	-	33.80	6.37	30.57
PK	5.925G	65.94	68.20	-2.26	56.16	3	Horizontal	185	1.80	-	34.05	6.34	30.61

802.11ac VHT80-BF_Nss1,(MCS0)_4TX

17/01/2020

5775MHz_TX

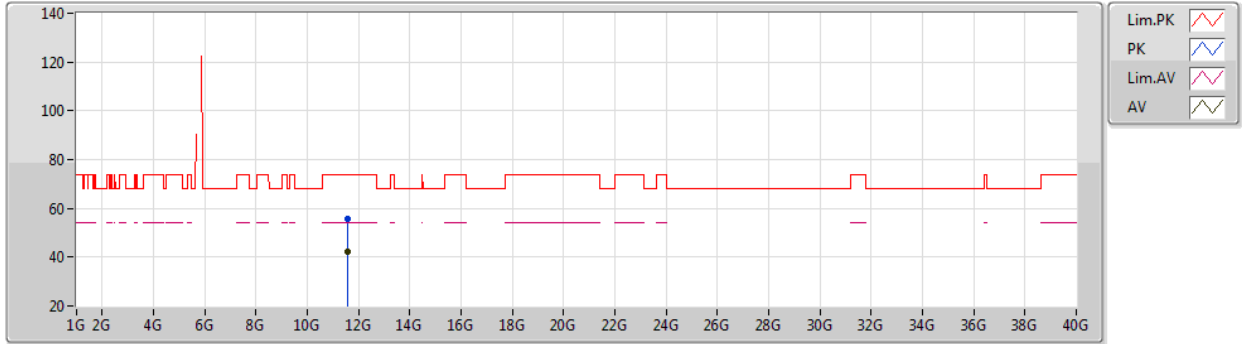


EUT Y_4TX
02-D-G-2
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.55256G	55.45	74.00	-18.55	39.36	3	Vertical	298	2.14	-	38.84	8.87	31.62
AV	11.55992G	42.04	54.00	-11.96	25.94	3	Vertical	298	2.14	-	38.85	8.87	31.62

802.11ac VHT80-BF_Nss1,(MCS0)_4TX

17/01/2020

5775MHz_TX

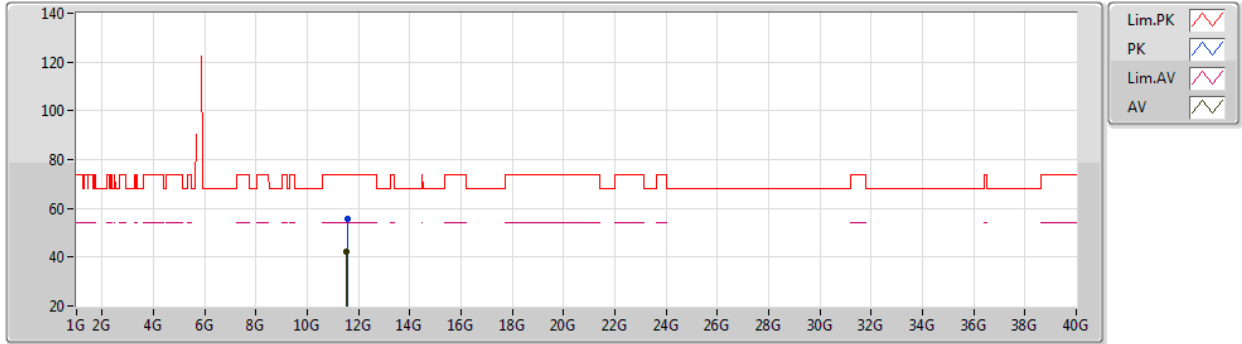


EUT Y_4TX
02-D-G-2
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.55748G	55.60	74.00	-18.40	39.50	3	Horizontal	212	2.75	-	38.85	8.87	31.62
AV	11.5484G	42.12	54.00	-11.88	26.03	3	Horizontal	212	2.75	-	38.84	8.87	31.62

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

17/01/2020

5180MHz_TX

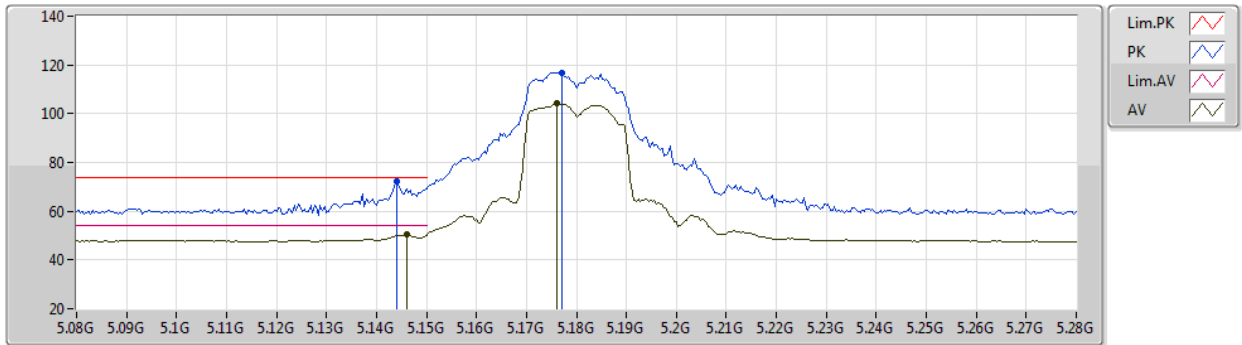


EUT Y_4TX
02-D-L-3-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.144G	72.07	74.00	-1.93	62.94	3	Vertical	360	1.80	-	33.54	5.97	30.38
AV	5.146G	50.31	54.00	-3.69	41.17	3	Vertical	360	1.80	-	33.55	5.97	30.38
PK	5.1772G	116.70	Inf	-Inf	107.52	3	Vertical	360	1.80	-	33.58	5.99	30.39
AV	5.176G	104.07	Inf	-Inf	94.89	3	Vertical	360	1.80	-	33.58	5.99	30.39

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

17/01/2020

5180MHz_TX

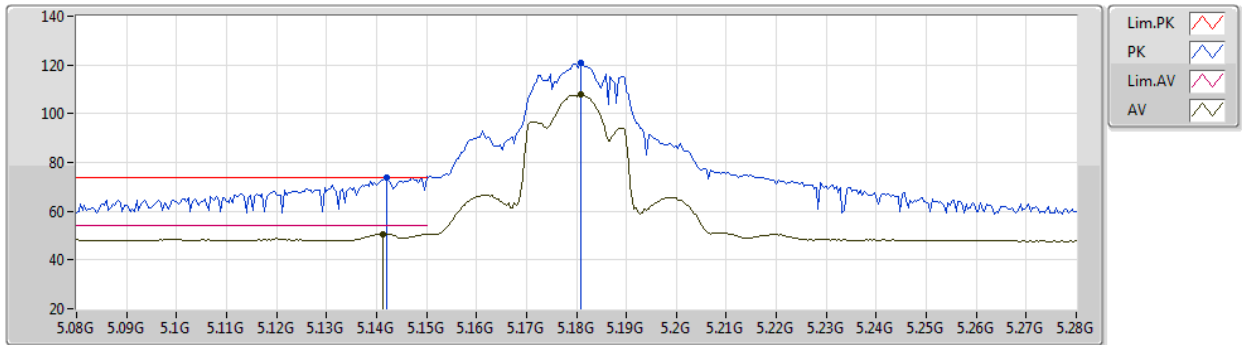


EUT Y_4TX
02-D-L-3-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
AV	5.1412G	50.54	54.00	-3.46	41.41	3	Horizontal	232	1.80	-	33.54	5.97	30.38
PK	5.1808G	121.07	Inf	-Inf	111.89	3	Horizontal	232	1.80	-	33.58	5.99	30.39
AV	5.1808G	107.82	Inf	-Inf	98.64	3	Horizontal	232	1.80	-	33.58	5.99	30.39
PK	5.142G	73.84	74.00	-0.16	64.71	3	Horizontal	232	1.80	-	33.54	5.97	30.38

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

17/01/2020

5180MHz_TX

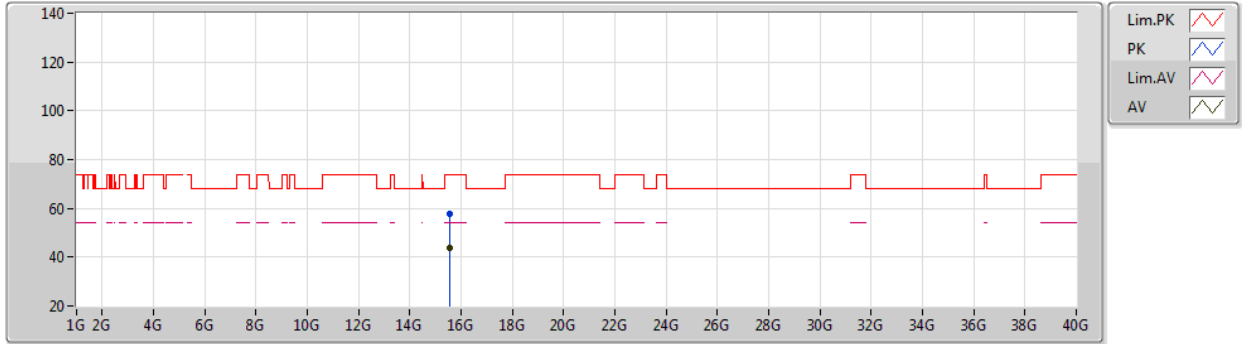


EUT Y_4TX
02-D-L-3
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.54008G	57.78	74.00	-16.22	41.78	3	Vertical	61	2.78	-	38.73	9.25	31.98
AV	15.54194G	43.74	54.00	-10.26	27.74	3	Vertical	61	2.78	-	38.73	9.25	31.98

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

17/01/2020

5180MHz_TX

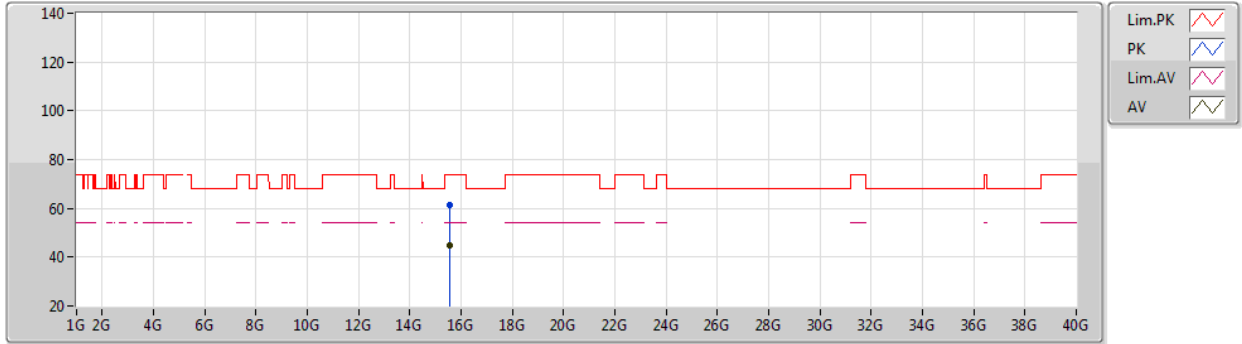


EUT Y_4TX
02-D-L-3
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.53616G	61.39	74.00	-12.61	45.37	3	Horizontal	313	2.33	-	38.75	9.25	31.98
AV	15.5366G	44.97	54.00	-9.03	28.96	3	Horizontal	313	2.33	-	38.74	9.25	31.98

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

17/01/2020

5200MHz_TX

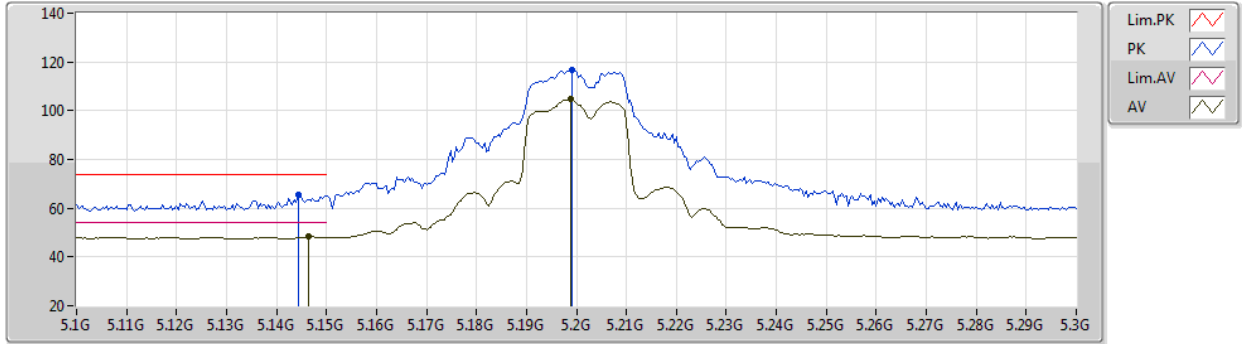


EUT Y_4TX
02-D-L-3-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1444G	65.57	74.00	-8.43	56.44	3	Vertical	0	2.64	-	33.54	5.97	30.38
AV	5.1464G	48.31	54.00	-5.69	39.17	3	Vertical	0	2.64	-	33.55	5.97	30.38
PK	5.1992G	116.69	Inf	-Inf	107.49	3	Vertical	0	2.64	-	33.60	6.00	30.40
AV	5.1988G	104.57	Inf	-Inf	95.37	3	Vertical	0	2.64	-	33.60	6.00	30.40

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

17/01/2020

5200MHz_TX

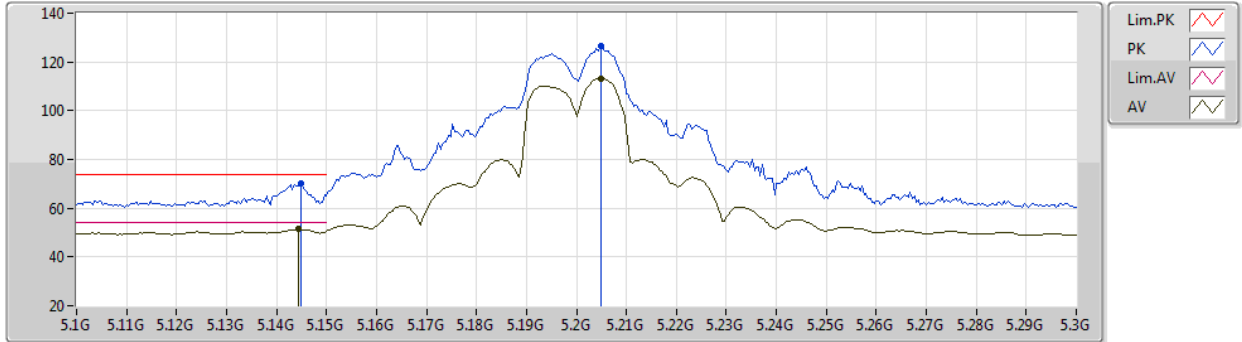


EUT Y_4TX
02-D-L-3-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1448G	70.09	74.00	-3.91	60.96	3	Horizontal	137	2.76	-	33.54	5.97	30.38
AV	5.1444G	51.41	54.00	-2.59	42.28	3	Horizontal	137	2.76	-	33.54	5.97	30.38
PK	5.2048G	126.30	Inf	-Inf	117.09	3	Horizontal	137	2.76	-	33.61	6.00	30.40
AV	5.2048G	113.28	Inf	-Inf	104.07	3	Horizontal	137	2.76	-	33.61	6.00	30.40

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

17/01/2020

5200MHz_TX

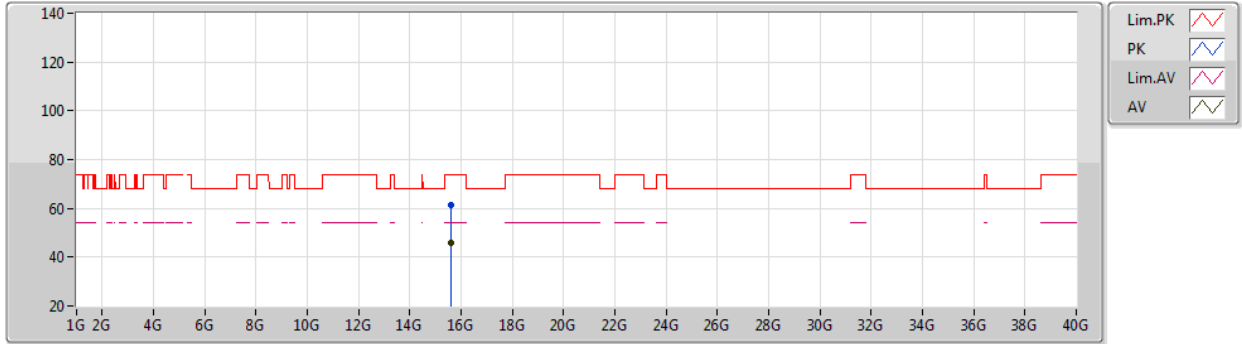


EUT Y_4TX
02-D-L-3
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.59916G	61.33	74.00	-12.67	45.49	3	Vertical	303	1.80	-	38.56	9.27	31.99
AV	15.59952G	46.08	54.00	-7.92	30.24	3	Vertical	303	1.80	-	38.56	9.27	31.99

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

17/01/2020

5200MHz_TX

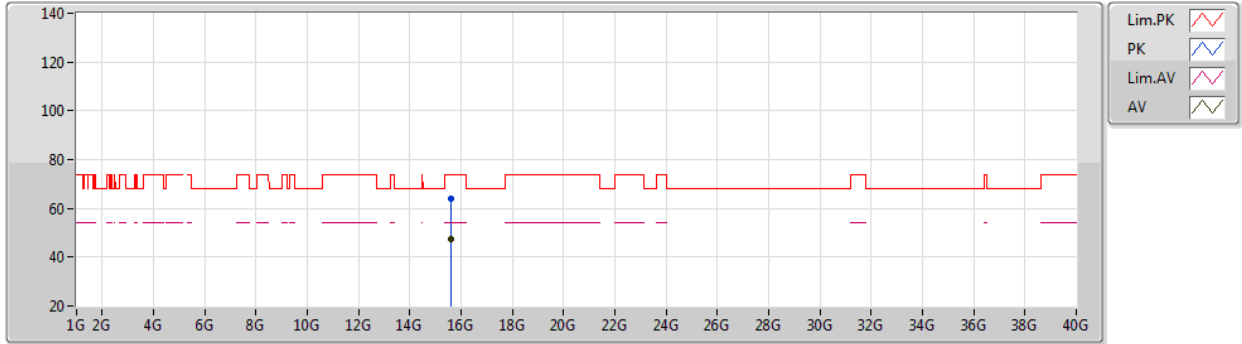


EUT Y_4TX
02-D-L-3
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.59828G	64.22	74.00	-9.78	48.38	3	Horizontal	308	2.19	-	38.56	9.27	31.99
AV	15.59636G	47.65	54.00	-6.35	31.80	3	Horizontal	308	2.19	-	38.57	9.27	31.99

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

17/01/2020

5240MHz_TX

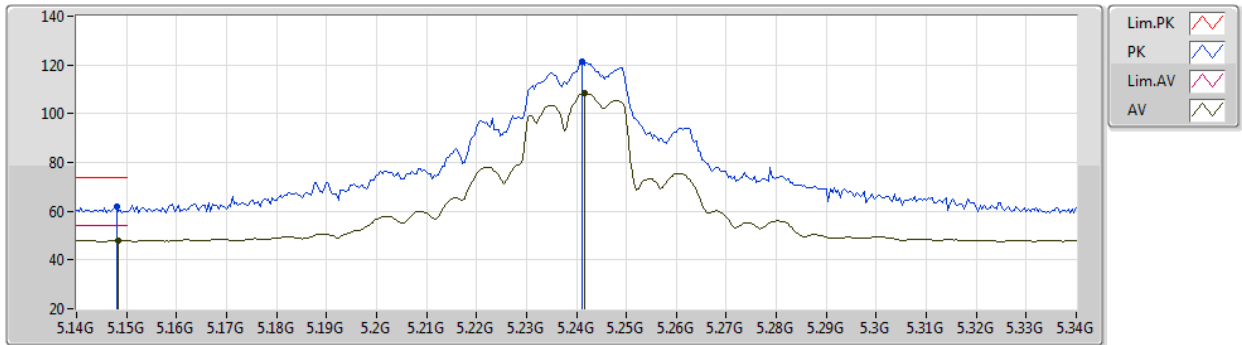


EUT Y_4TX
02-D-L-3-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.148G	61.69	74.00	-12.31	52.55	3	Vertical	65	1.73	-	33.55	5.97	30.38
AV	5.1484G	48.00	54.00	-6.00	38.86	3	Vertical	65	1.73	-	33.55	5.97	30.38
PK	5.2412G	121.34	Inf	-Inf	112.06	3	Vertical	65	1.73	-	33.68	6.02	30.42
AV	5.2416G	108.43	Inf	-Inf	99.15	3	Vertical	65	1.73	-	33.68	6.02	30.42

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

17/01/2020

5240MHz_TX

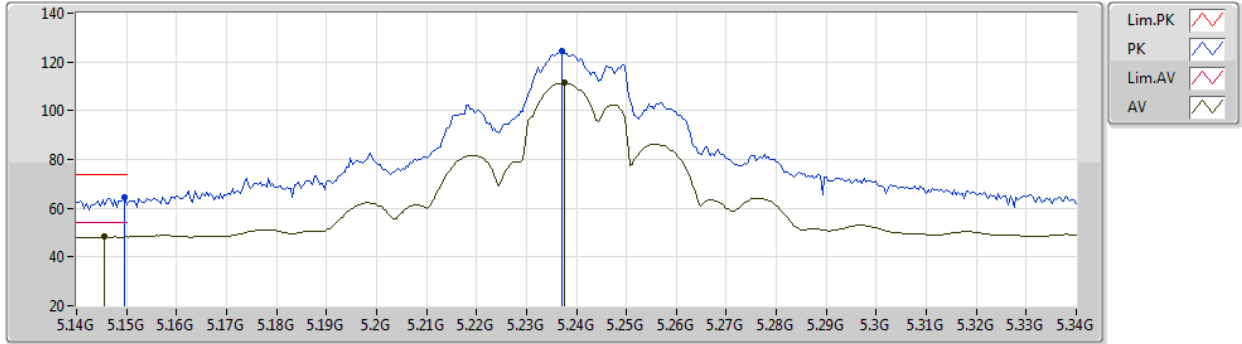


EUT Y_4TX
02-D-L-3-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1496G	64.32	74.00	-9.68	55.18	3	Horizontal	243	2.37	-	33.55	5.97	30.38
AV	5.1456G	48.27	54.00	-5.73	39.13	3	Horizontal	243	2.37	-	33.55	5.97	30.38
PK	5.2372G	124.34	Inf	-Inf	115.06	3	Horizontal	243	2.37	-	33.67	6.02	30.41
AV	5.2376G	111.45	Inf	-Inf	102.17	3	Horizontal	243	2.37	-	33.68	6.02	30.42

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

17/01/2020

5240MHz_TX

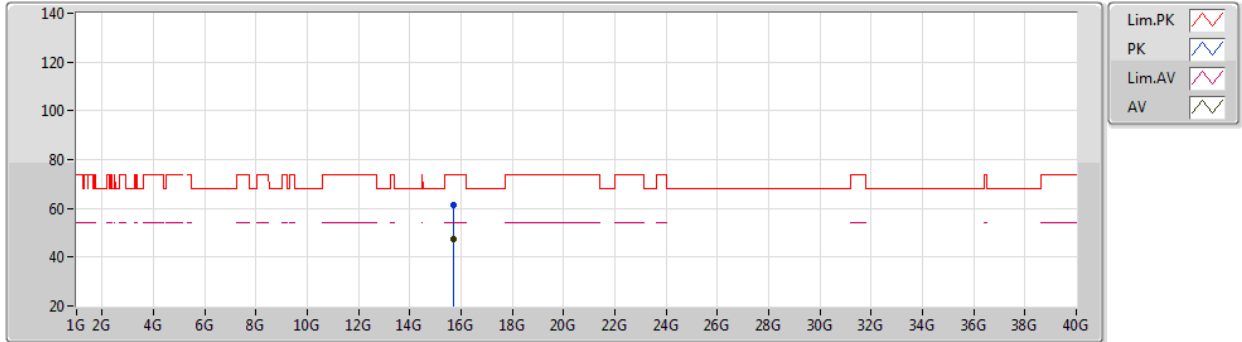


EUT Y_4TX
02-D-L-3
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.71832G	61.34	74.00	-12.66	45.83	3	Vertical	310	2.13	-	38.22	9.31	32.02
AV	15.71872G	47.48	54.00	-6.52	31.97	3	Vertical	310	2.13	-	38.22	9.31	32.02

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

17/01/2020

5240MHz_TX

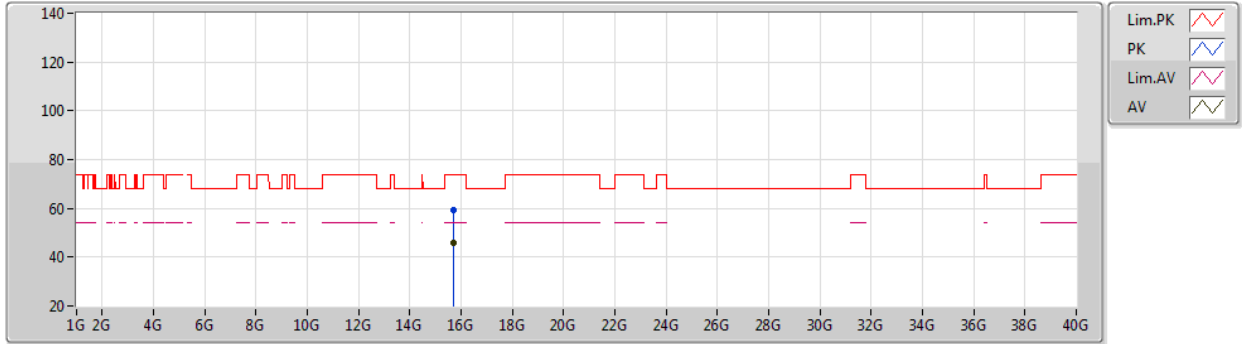


EUT Y_4TX
02-D-L-3
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.7191G	59.41	74.00	-14.59	43.91	3	Horizontal	157	2.00	-	38.21	9.31	32.02
AV	15.7187G	45.76	54.00	-8.24	30.25	3	Horizontal	157	2.00	-	38.22	9.31	32.02

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

17/01/2020

5745MHz_TX

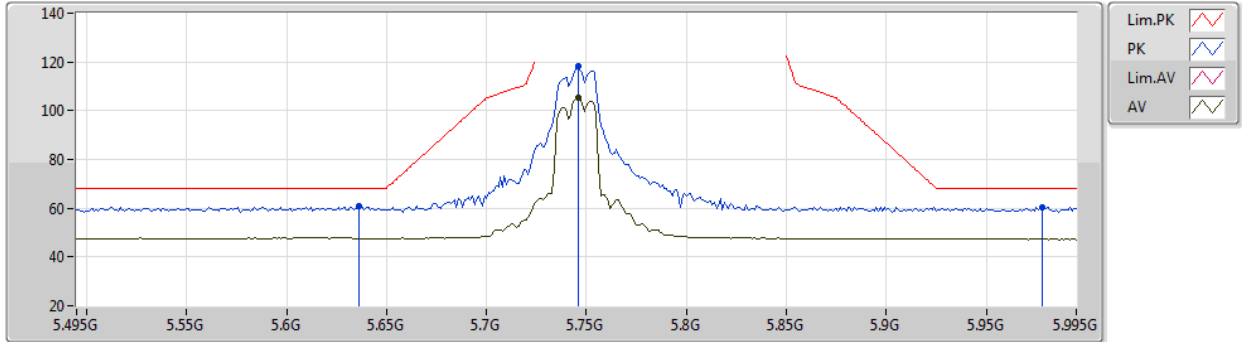


EUT Y_4TX
02-D-L-3-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.636G	60.65	68.20	-7.55	50.94	3	Vertical	60	2.41	-	33.93	6.32	30.54
PK	5.746G	118.52	Inf	-Inf	108.92	3	Vertical	60	2.41	-	33.80	6.37	30.57
AV	5.746G	105.25	Inf	-Inf	95.65	3	Vertical	60	2.41	-	33.80	6.37	30.57
PK	5.978G	60.42	68.20	-7.78	50.58	3	Vertical	60	2.41	-	34.16	6.31	30.63

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

17/01/2020

5745MHz_TX

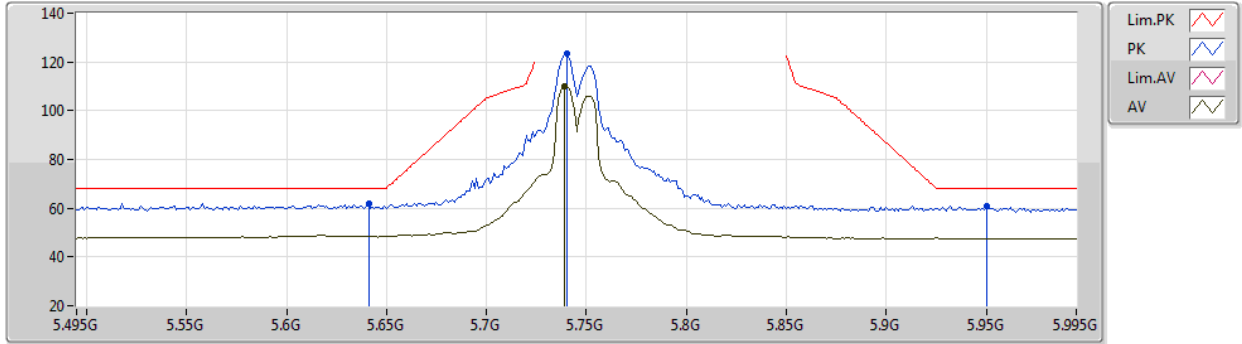


EUT Y_4TX
02-D-L-3-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.641G	62.06	68.20	-6.14	52.36	3	Horizontal	176	1.87	-	33.92	6.32	30.54
PK	5.74G	123.40	Inf	-Inf	113.80	3	Horizontal	176	1.87	-	33.80	6.37	30.57
AV	5.739G	109.99	Inf	-Inf	100.39	3	Horizontal	176	1.87	-	33.80	6.37	30.57
PK	5.95G	60.85	68.20	-7.35	51.05	3	Horizontal	176	1.87	-	34.10	6.32	30.62

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

17/01/2020

5745MHz_TX

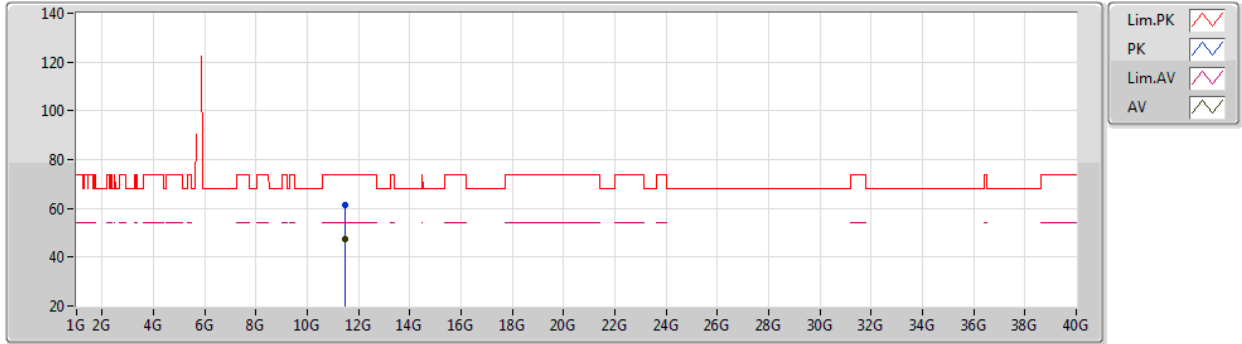


EUT Y_4TX
02-D-L-3
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.49006G	61.19	74.00	-12.81	45.15	3	Vertical	255	2.93	-	38.79	8.85	31.60
AV	11.48952G	47.31	54.00	-6.69	31.27	3	Vertical	255	2.93	-	38.79	8.85	31.60

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

17/01/2020

5745MHz_TX

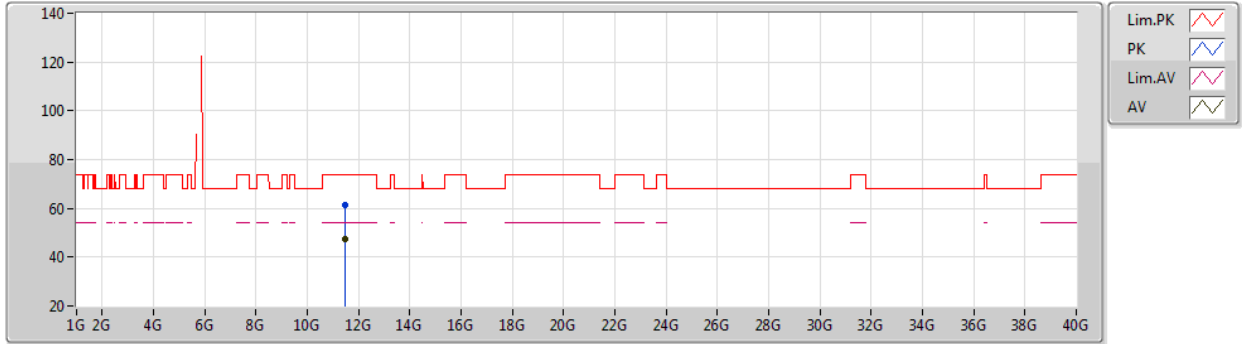


EUT Y_4TX
02-D-L-3
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.48976G	61.21	74.00	-12.79	45.17	3	Horizontal	63	3.00	-	38.79	8.85	31.60
AV	11.48912G	47.37	54.00	-6.63	31.33	3	Horizontal	63	3.00	-	38.79	8.85	31.60

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

17/01/2020

5785MHz_TX

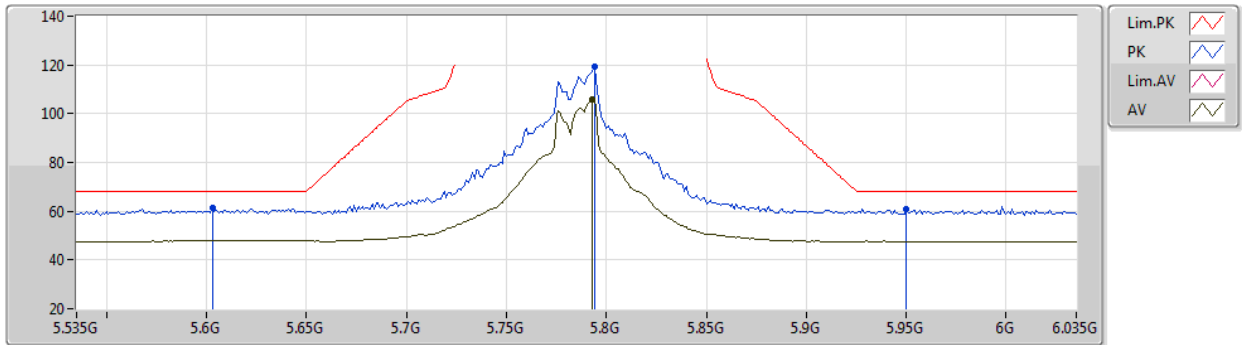


EUT Y_4TX
02-D-L-3-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.603G	61.50	68.20	-6.70	51.74	3	Vertical	104	1.82	-	33.99	6.30	30.53
PK	5.794G	119.18	Inf	-Inf	109.56	3	Vertical	104	1.82	-	33.80	6.40	30.58
AV	5.793G	105.81	Inf	-Inf	96.19	3	Vertical	104	1.82	-	33.80	6.40	30.58
PK	5.95G	61.04	68.20	-7.16	51.24	3	Vertical	104	1.82	-	34.10	6.32	30.62

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

17/01/2020

5785MHz_TX

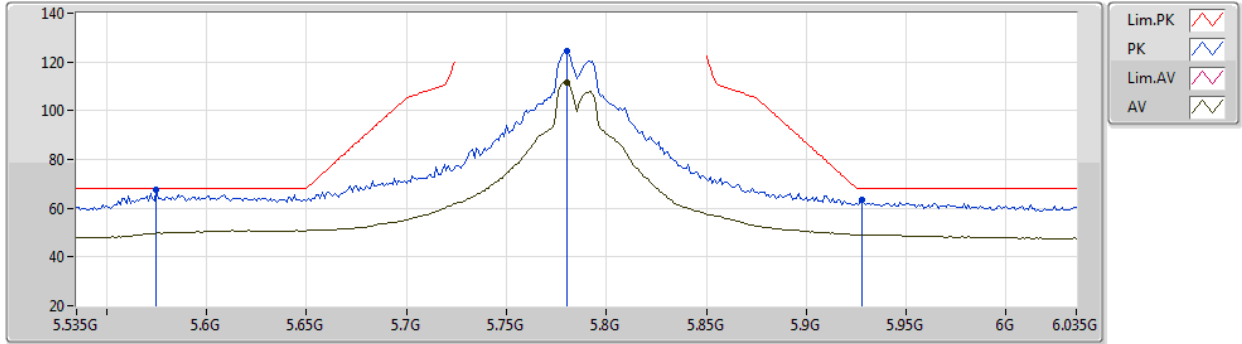


EUT Y_4TX
02-D-L-3-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.575G	67.36	68.20	-0.84	57.63	3	Horizontal	177	1.95	-	33.98	6.28	30.53
PK	5.78G	124.36	Inf	-Inf	114.75	3	Horizontal	177	1.95	-	33.80	6.39	30.58
AV	5.78G	111.59	Inf	-Inf	101.98	3	Horizontal	177	1.95	-	33.80	6.39	30.58
PK	5.928G	63.41	68.20	-4.79	53.63	3	Horizontal	177	1.95	-	34.06	6.34	30.62

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

17/01/2020

5785MHz_TX

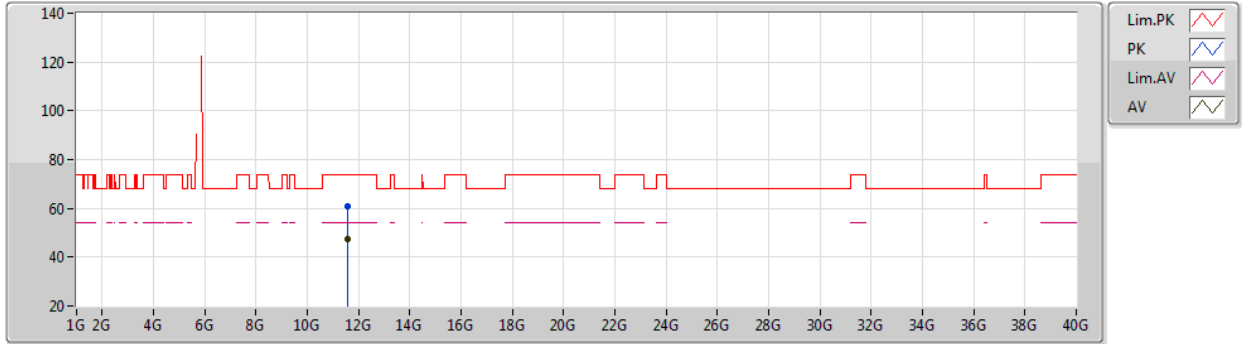


EUT Y_4TX
02-D-L-3
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.56808G	61.06	74.00	-12.94	44.97	3	Vertical	258	1.80	-	38.85	8.87	31.63
AV	11.56958G	47.50	54.00	-6.50	31.39	3	Vertical	258	1.80	-	38.86	8.88	31.63

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

17/01/2020

5785MHz_TX

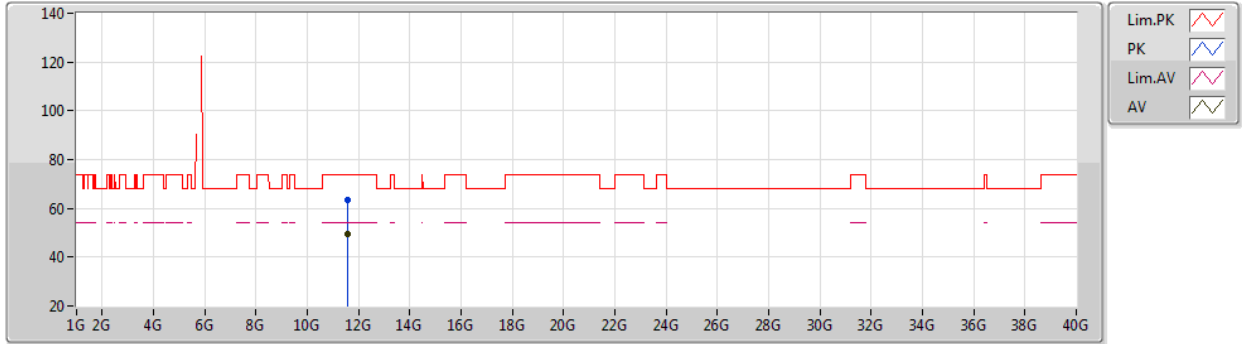


EUT Y_4TX
02-D-L-3
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.56916G	63.28	74.00	-10.72	47.17	3	Horizontal	65	3.00	-	38.86	8.88	31.63
AV	11.56964G	49.63	54.00	-4.37	33.52	3	Horizontal	65	3.00	-	38.86	8.88	31.63

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

17/01/2020

5825MHz_TX

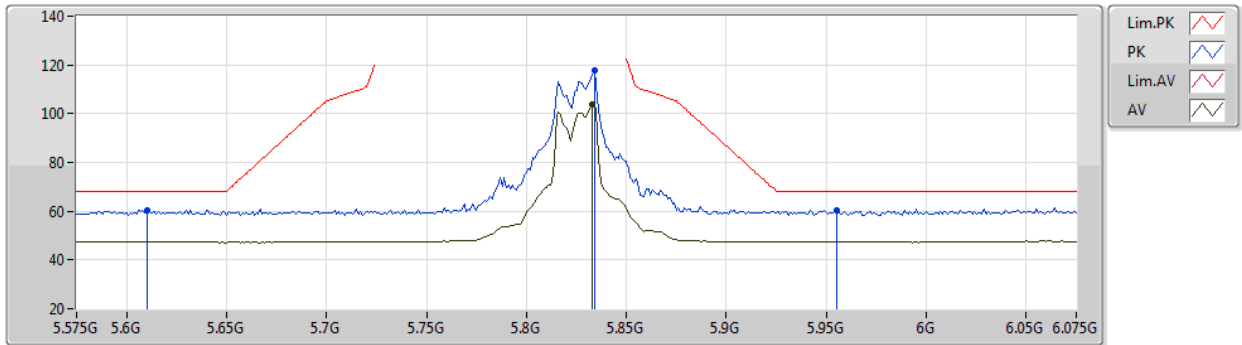


EUT Y_4TX
02-D-L-3-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.61G	60.33	68.20	-7.87	50.58	3	Vertical	106	1.80	-	33.98	6.30	30.53
PK	5.834G	117.68	Inf	-Inf	108.02	3	Vertical	106	1.80	-	33.87	6.38	30.59
AV	5.833G	103.82	Inf	-Inf	94.16	3	Vertical	106	1.80	-	33.87	6.38	30.59
PK	5.955G	60.55	68.20	-7.65	50.74	3	Vertical	106	1.80	-	34.11	6.32	30.62

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

17/01/2020

5825MHz_TX

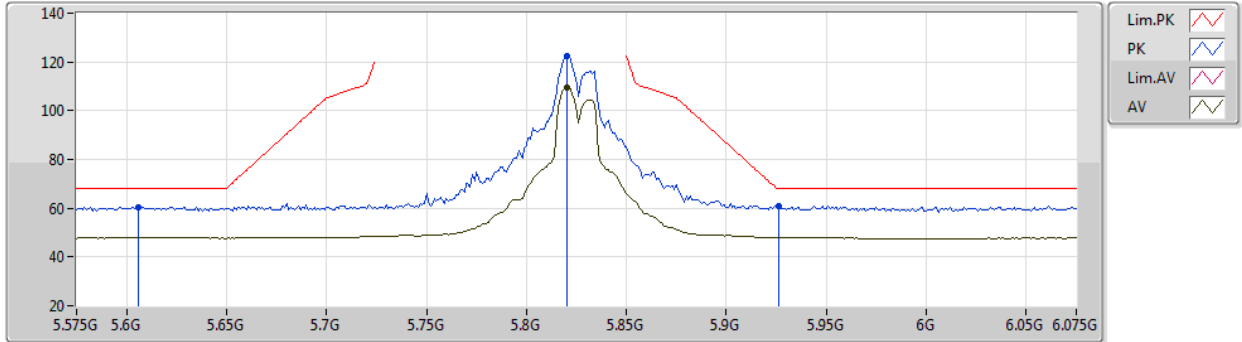


EUT Y_4TX
02-D-L-3-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.606G	60.60	68.20	-7.60	50.84	3	Horizontal	181	1.80	-	33.99	6.30	30.53
PK	5.82G	122.64	Inf	-Inf	113.00	3	Horizontal	181	1.80	-	33.84	6.39	30.59
AV	5.82G	109.44	Inf	-Inf	99.80	3	Horizontal	181	1.80	-	33.84	6.39	30.59
PK	5.926G	60.81	68.20	-7.39	51.04	3	Horizontal	181	1.80	-	34.05	6.34	30.62

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

17/01/2020

5825MHz_TX

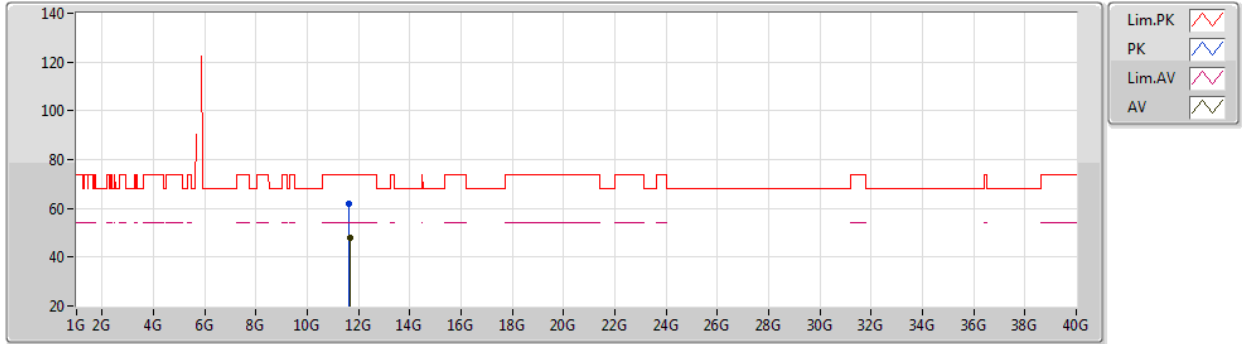


EUT Y_4TX
02-D-L-3
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.64736G	61.77	74.00	-12.23	45.60	3	Vertical	257	2.68	-	38.92	8.90	31.65
AV	11.64952G	47.85	54.00	-6.15	31.68	3	Vertical	257	2.68	-	38.92	8.90	31.65

802.11ax HEW20-BF_Nss1,(MCS0)_4TX

17/01/2020

5825MHz_TX

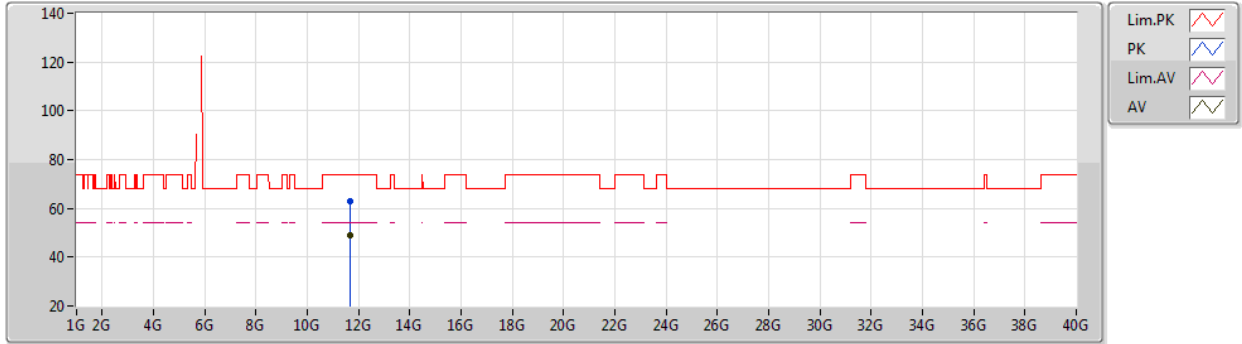


EUT Y_4TX
02-D-L-3
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.64886G	62.83	74.00	-11.17	46.66	3	Horizontal	63	1.60	-	38.92	8.90	31.65
AV	11.64946G	48.83	54.00	-5.17	32.66	3	Horizontal	63	1.60	-	38.92	8.90	31.65

802.11ax HEW40-BF_Nss1,(MCS0)_4TX

02/03/2020

5190MHz_TX

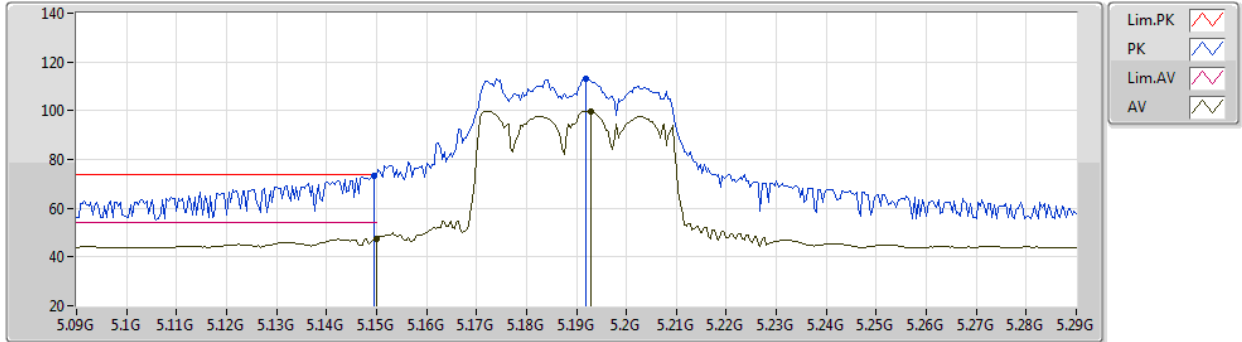


EUT Y_4TX
01-B-J-7-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1496G	73.32	74.00	-0.68	69.10	3	Vertical	125	1.50	-	32.80	5.87	34.45
AV	5.15G	47.43	54.00	-6.57	43.21	3	Vertical	125	1.50	-	32.80	5.87	34.45
PK	5.192G	113.33	Inf	-Inf	109.09	3	Vertical	125	1.50	-	32.80	5.90	34.46
AV	5.1928G	99.90	Inf	-Inf	95.66	3	Vertical	125	1.50	-	32.80	5.90	34.46

802.11ax HEW40-BF_Nss1,(MCS0)_4TX

02/03/2020

5190MHz_TX

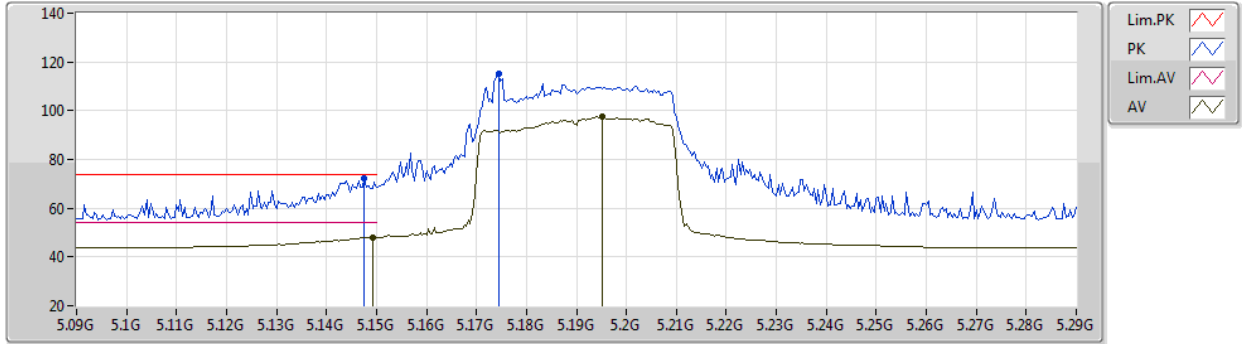


EUT Y_4TX
01-B-J-7-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1476G	72.28	74.00	-1.72	68.06	3	Horizontal	132	1.80	-	32.80	5.87	34.45
AV	5.1492G	47.87	54.00	-6.13	43.65	3	Horizontal	132	1.80	-	32.80	5.87	34.45
PK	5.1744G	115.02	Inf	-Inf	110.79	3	Horizontal	132	1.80	-	32.80	5.89	34.46
AV	5.1952G	97.48	Inf	-Inf	93.24	3	Horizontal	132	1.80	-	32.80	5.90	34.46

802.11ax HEW40-BF_Nss1,(MCS0)_4TX

02/03/2020

5190MHz_TX

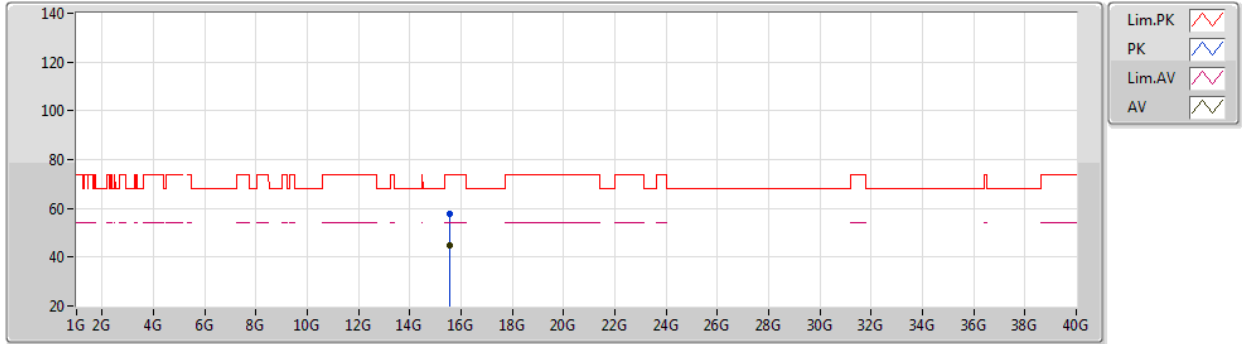


EUT Y_4TX
01-B-J-7
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.56852G	57.73	74.00	-16.27	43.89	3	Vertical	322	1.46	-	38.75	9.78	34.69
AV	15.5671G	44.91	54.00	-9.09	31.07	3	Vertical	322	1.46	-	38.75	9.78	34.69

802.11ax HEW40-BF_Nss1,(MCS0)_4TX

02/03/2020

5190MHz_TX

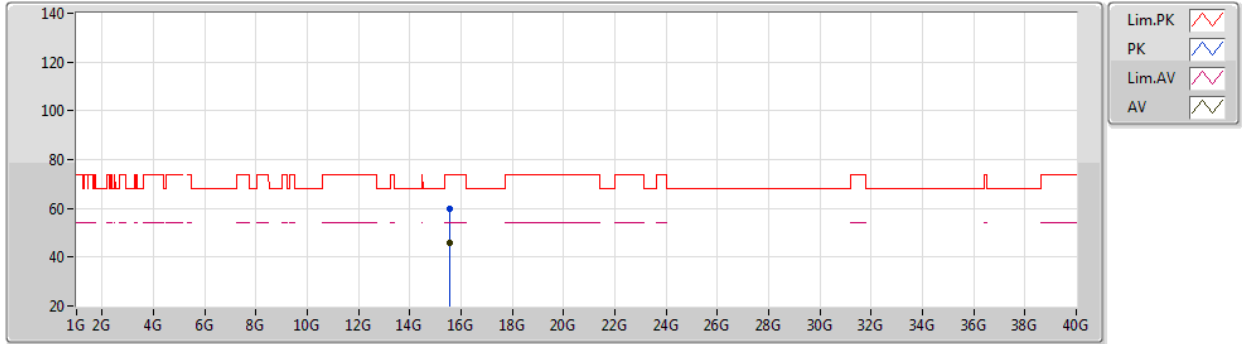


EUT Y_4TX
01-B-J-7
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.57016G	59.80	74.00	-14.20	45.97	3	Horizontal	35	2.53	-	38.74	9.78	34.69
AV	15.56736G	45.90	54.00	-8.10	32.06	3	Horizontal	35	2.53	-	38.75	9.78	34.69

802.11ax HEW40-BF_Nss1,(MCS0)_4TX

17/01/2020

5230MHz_TX

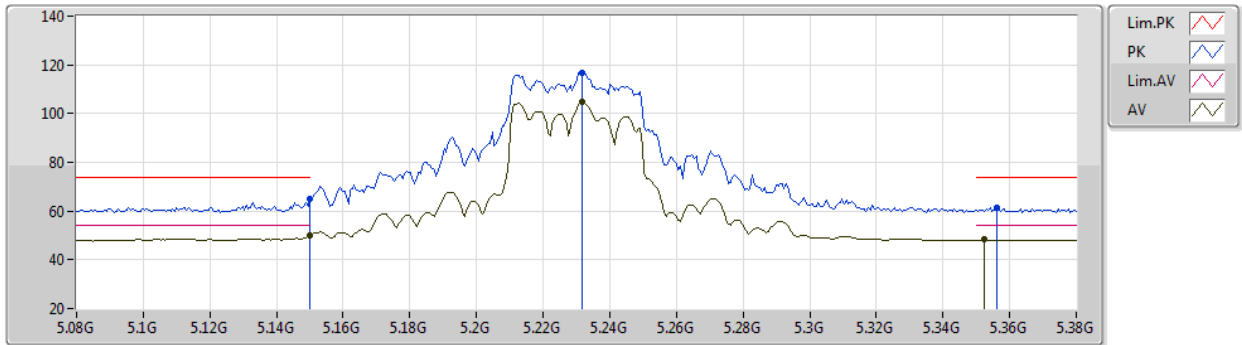


EUT Y_4TX
02-D-C-4-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.15G	65.24	74.00	-8.76	56.10	3	Vertical	67	1.80	-	33.55	5.97	30.38
AV	5.15G	50.00	54.00	-4.00	40.86	3	Vertical	67	1.80	-	33.55	5.97	30.38
PK	5.2318G	116.88	Inf	-Inf	107.61	3	Vertical	67	1.80	-	33.66	6.02	30.41
AV	5.2318G	104.60	Inf	-Inf	95.33	3	Vertical	67	1.80	-	33.66	6.02	30.41
PK	5.356G	61.47	74.00	-12.53	51.99	3	Vertical	67	1.80	-	33.86	6.08	30.46
AV	5.3524G	48.21	54.00	-5.79	38.74	3	Vertical	67	1.80	-	33.85	6.08	30.46

802.11ax HEW40-BF_Nss1,(MCS0)_4TX

17/01/2020

5230MHz_TX

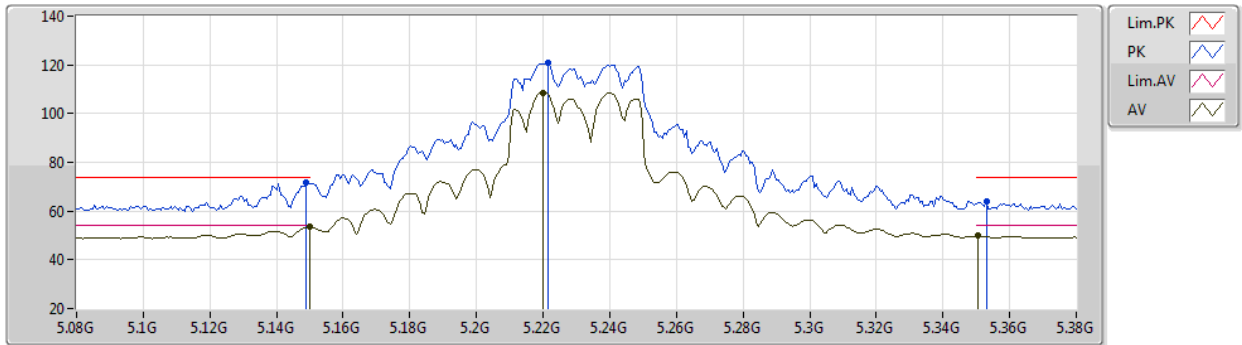


EUT Y_4TX
02-D-C-4-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.149G	71.88	74.00	-2.12	62.74	3	Horizontal	176	2.72	-	33.55	5.97	30.38
AV	5.15G	53.56	54.00	-0.44	44.42	3	Horizontal	176	2.72	-	33.55	5.97	30.38
PK	5.2216G	120.82	Inf	-Inf	111.58	3	Horizontal	176	2.72	-	33.64	6.01	30.41
AV	5.2198G	108.60	Inf	-Inf	99.36	3	Horizontal	176	2.72	-	33.64	6.01	30.41
PK	5.353G	64.02	74.00	-9.98	54.55	3	Horizontal	176	2.72	-	33.85	6.08	30.46
AV	5.3506G	49.90	54.00	-4.10	40.43	3	Horizontal	176	2.72	-	33.85	6.08	30.46

802.11ax HEW40-BF_Nss1,(MCS0)_4TX

17/01/2020

5230MHz_TX

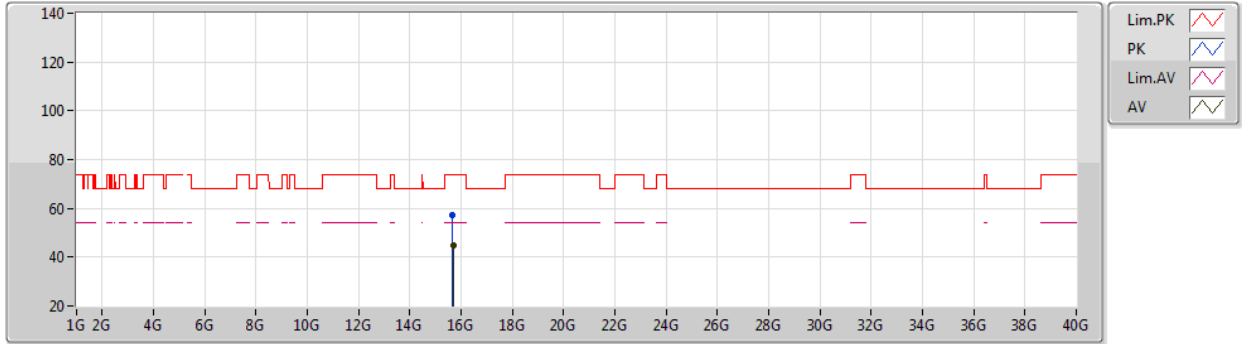


EUT Y_4TX
02-D-C-4
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.67728G	57.36	74.00	-16.64	41.74	3	Vertical	186	2.52	-	38.34	9.29	32.01
AV	15.70482G	44.62	54.00	-9.38	29.08	3	Vertical	186	2.52	-	38.26	9.30	32.02

802.11ax HEW40-BF_Nss1,(MCS0)_4TX

17/01/2020

5230MHz_TX

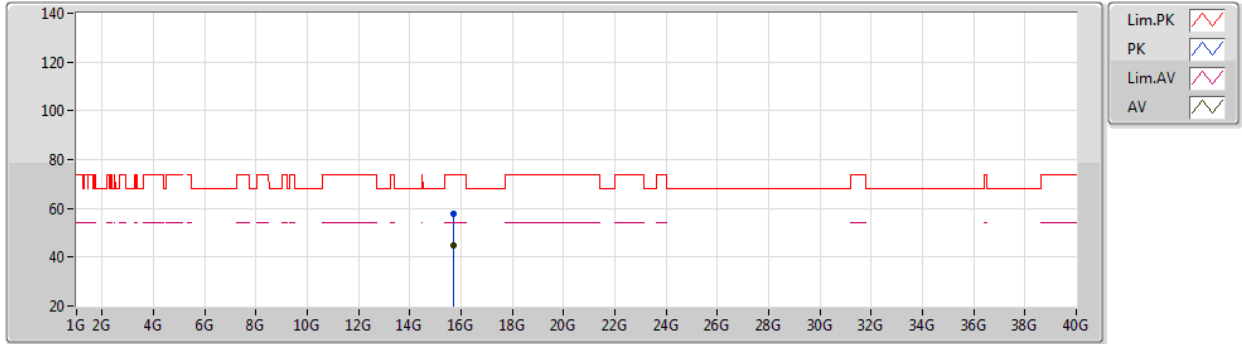


EUT Y_4TX
02-D-C-4
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.702G	57.93	74.00	-16.07	42.38	3	Horizontal	158	2.03	-	38.26	9.30	32.01
AV	15.6939G	44.64	54.00	-9.36	29.06	3	Horizontal	158	2.03	-	38.29	9.30	32.01

802.11ax HEW40-BF_Nss1,(MCS0)_4TX

17/01/2020

5755MHz_TX

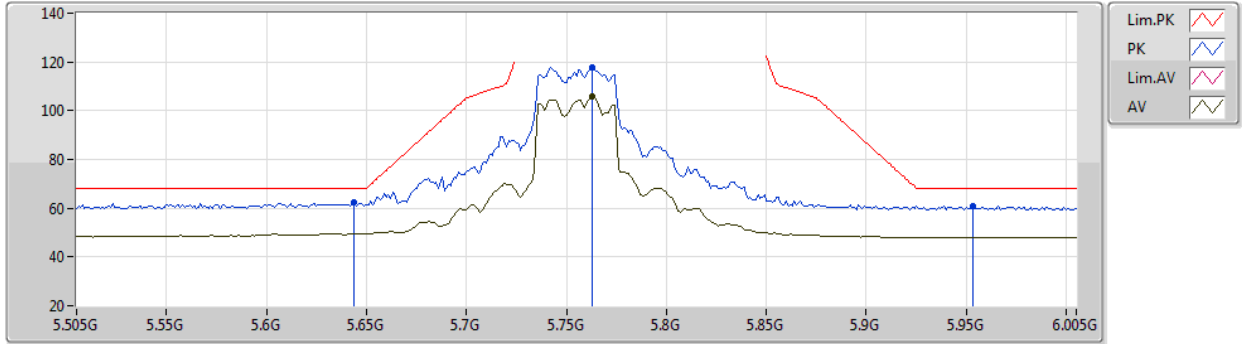


EUT Y_4TX
02-D-C-4-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.644G	62.37	68.20	-5.83	52.68	3	Vertical	30	2.97	-	33.91	6.32	30.54
PK	5.763G	117.93	Inf	-Inf	108.32	3	Vertical	30	2.97	-	33.80	6.38	30.57
AV	5.763G	105.76	Inf	-Inf	96.15	3	Vertical	30	2.97	-	33.80	6.38	30.57
PK	5.953G	60.84	68.20	-7.36	51.03	3	Vertical	30	2.97	-	34.11	6.32	30.62

802.11ax HEW40-BF_Nss1,(MCS0)_4TX

17/01/2020

5755MHz_TX

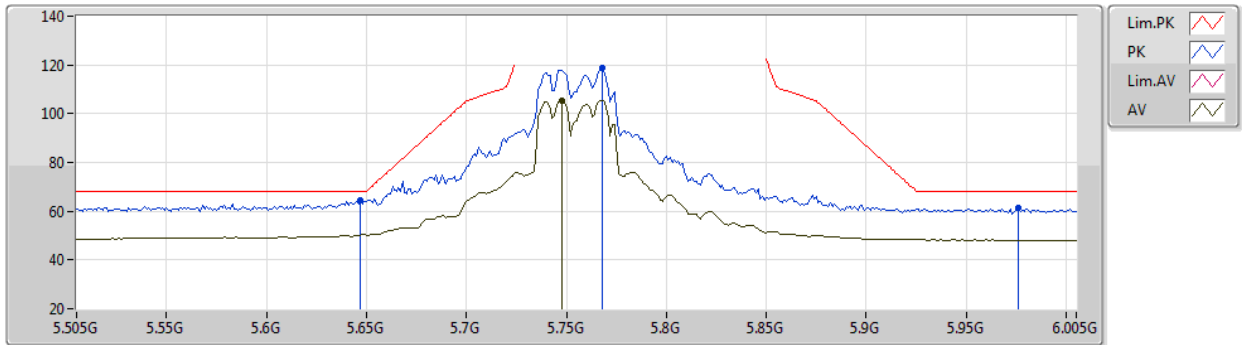


EUT Y_4TX
02-D-C-4-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.647G	64.27	68.20	-3.93	54.58	3	Horizontal	156	1.80	-	33.91	6.32	30.54
PK	5.768G	118.55	Inf	-Inf	108.94	3	Horizontal	156	1.80	-	33.80	6.38	30.57
AV	5.748G	105.53	Inf	-Inf	95.93	3	Horizontal	156	1.80	-	33.80	6.37	30.57
PK	5.976G	61.53	68.20	-6.67	51.70	3	Horizontal	156	1.80	-	34.15	6.31	30.63

802.11ax HEW40-BF_Nss1,(MCS0)_4TX

17/01/2020

5755MHz_TX

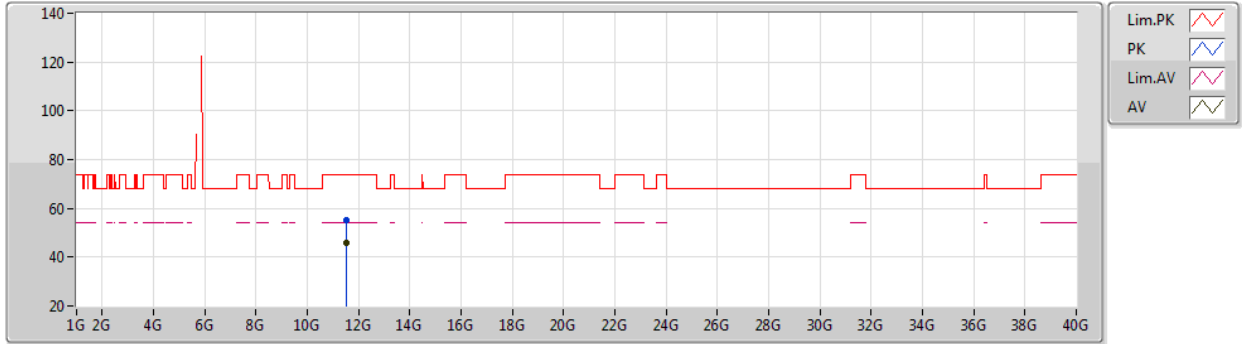


EUT Y_4TX
02-D-C-4
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.50814G	55.29	74.00	-18.71	39.23	3	Vertical	348	1.87	-	38.81	8.86	31.61
AV	11.5094G	45.72	54.00	-8.28	29.66	3	Vertical	348	1.87	-	38.81	8.86	31.61

802.11ax HEW40-BF_Nss1,(MCS0)_4TX

17/01/2020

5755MHz_TX

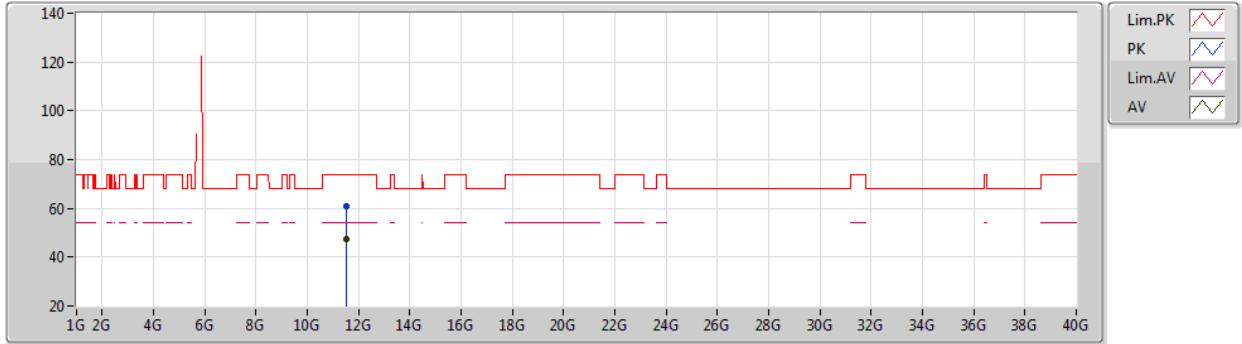


EUT Y_4TX
02-D-C-4
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.50124G	60.74	74.00	-13.26	44.69	3	Horizontal	130	1.41	-	38.80	8.86	31.61
AV	11.52044G	47.30	54.00	-6.70	31.23	3	Horizontal	130	1.41	-	38.82	8.86	31.61

802.11ax HEW40-BF_Nss1,(MCS0)_4TX

17/01/2020

5795MHz_TX

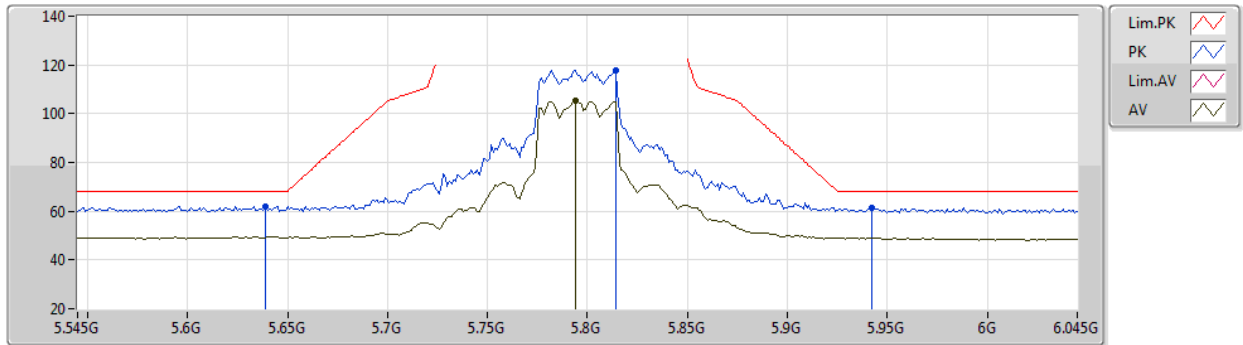


EUT Y_4TX
02-D-C-4-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.639G	62.12	68.20	-6.08	52.42	3	Vertical	38	2.39	-	33.92	6.32	30.54
PK	5.814G	117.86	Inf	-Inf	108.22	3	Vertical	38	2.39	-	33.83	6.39	30.58
AV	5.794G	105.56	Inf	-Inf	95.94	3	Vertical	38	2.39	-	33.80	6.40	30.58
PK	5.942G	61.45	68.20	-6.75	51.66	3	Vertical	38	2.39	-	34.08	6.33	30.62

802.11ax HEW40-BF_Nss1,(MCS0)_4TX

17/01/2020

5795MHz_TX

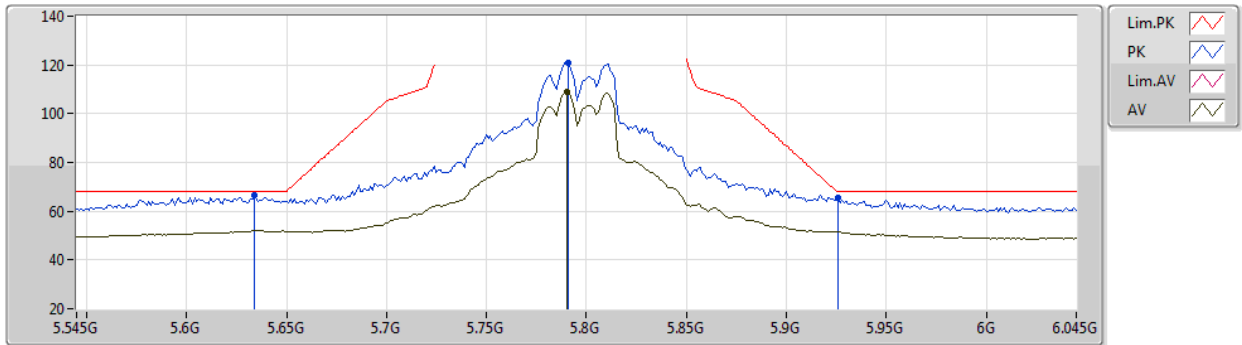


EUT Y_4TX
02-D-C-4-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.634G	66.42	68.20	-1.78	56.71	3	Horizontal	177	1.79	-	33.93	6.32	30.54
PK	5.791G	121.11	Inf	-Inf	111.49	3	Horizontal	177	1.79	-	33.80	6.40	30.58
AV	5.79G	108.83	Inf	-Inf	99.21	3	Horizontal	177	1.79	-	33.80	6.40	30.58
PK	5.926G	65.43	68.20	-2.77	55.66	3	Horizontal	177	1.79	-	34.05	6.34	30.62

802.11ax HEW40-BF_Nss1,(MCS0)_4TX

17/01/2020

5795MHz_TX

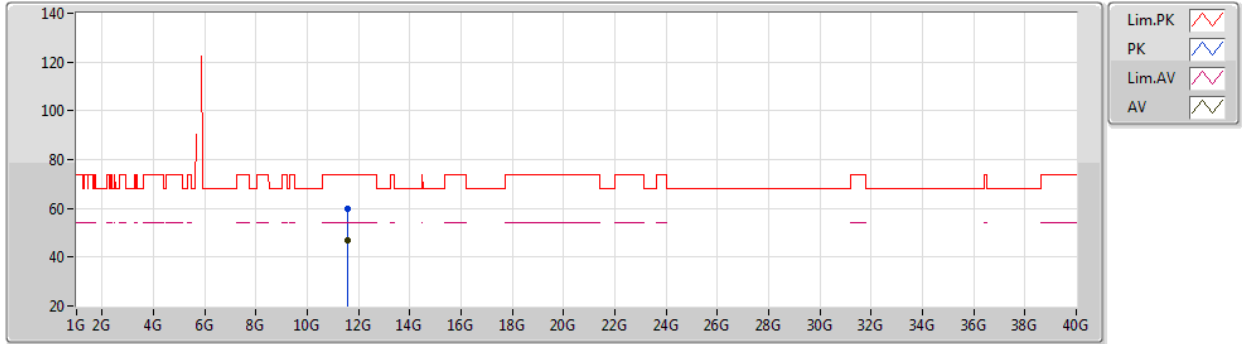


EUT Y_4TX
02-D-C-4
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.5906G	59.87	74.00	-14.13	43.75	3	Vertical	258	2.28	-	38.87	8.88	31.63
AV	11.58988G	47.13	54.00	-6.87	31.01	3	Vertical	258	2.28	-	38.87	8.88	31.63

802.11ax HEW40-BF_Nss1,(MCS0)_4TX

17/01/2020

5795MHz_TX

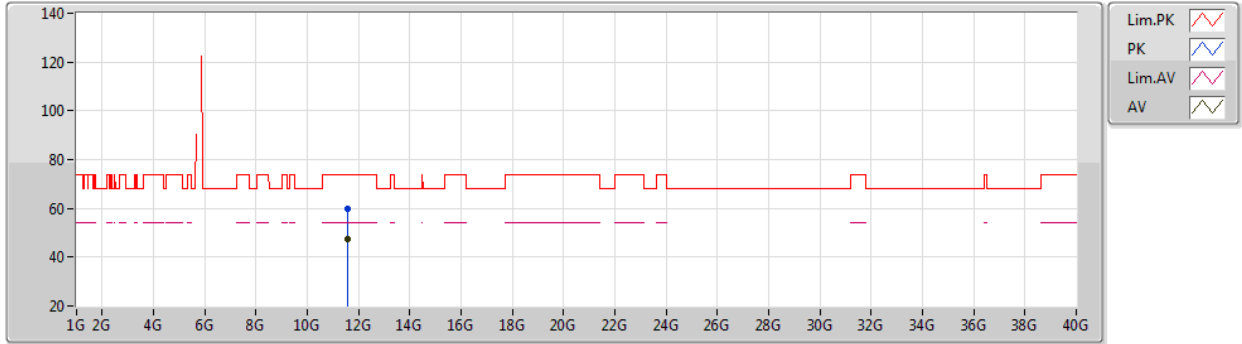


EUT Y_4TX
02-D-C-4
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.59048G	59.61	74.00	-14.39	43.49	3	Horizontal	258	2.28	-	38.87	8.88	31.63
AV	11.58976G	47.23	54.00	-6.77	31.11	3	Horizontal	258	2.28	-	38.87	8.88	31.63

802.11ax HEW80-BF_Nss1,(MCS0)_4TX

17/01/2020

5210MHz_TX

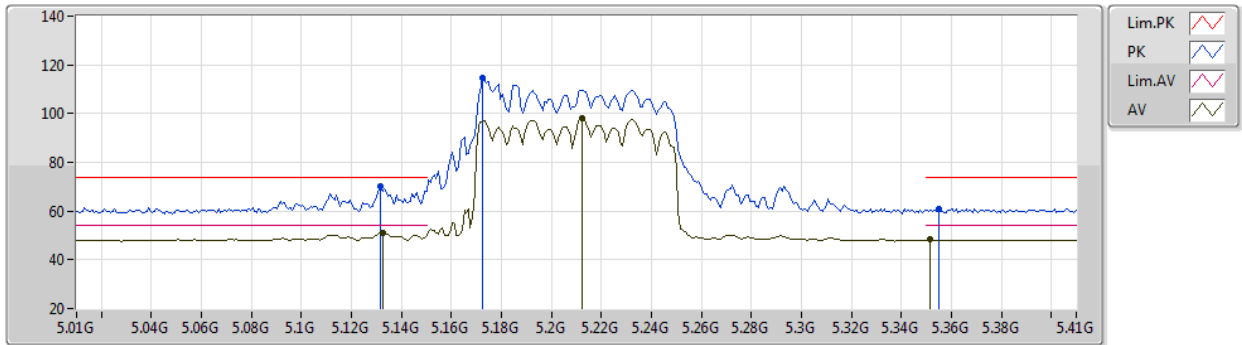


EUT Y_4TX
02-D-C-4-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1316G	70.34	74.00	-3.66	61.22	3	Vertical	68	1.77	-	33.53	5.97	30.38
AV	5.1324G	51.01	54.00	-2.99	41.89	3	Vertical	68	1.77	-	33.53	5.97	30.38
PK	5.1724G	114.52	Inf	-Inf	105.35	3	Vertical	68	1.77	-	33.57	5.99	30.39
AV	5.2124G	97.92	Inf	-Inf	88.69	3	Vertical	68	1.77	-	33.62	6.01	30.40
PK	5.3548G	60.98	74.00	-13.02	51.51	3	Vertical	68	1.77	-	33.85	6.08	30.46
AV	5.3516G	48.19	54.00	-5.81	38.72	3	Vertical	68	1.77	-	33.85	6.08	30.46

802.11ax HEW80-BF_Nss1,(MCS0)_4TX

17/01/2020

5210MHz_TX

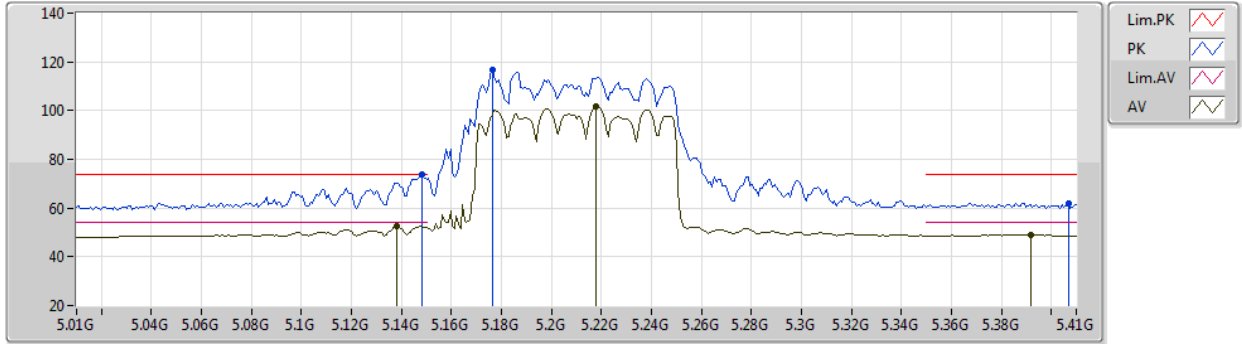


EUT Y_4TX
02-D-C-4-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1484G	73.59	74.00	-0.41	64.45	3	Horizontal	157	2.70	-	33.55	5.97	30.38
AV	5.138G	52.59	54.00	-1.41	43.46	3	Horizontal	157	2.70	-	33.54	5.97	30.38
PK	5.1764G	116.73	Inf	-Inf	107.55	3	Horizontal	157	2.70	-	33.58	5.99	30.39
AV	5.218G	101.85	Inf	-Inf	92.61	3	Horizontal	157	2.70	-	33.64	6.01	30.41
PK	5.4068G	61.79	74.00	-12.21	52.25	3	Horizontal	157	2.70	-	33.90	6.11	30.47
AV	5.3916G	48.96	54.00	-5.04	39.44	3	Horizontal	157	2.70	-	33.89	6.10	30.47

802.11ax HEW80-BF_Nss1,(MCS0)_4TX

17/01/2020

5210MHz_TX

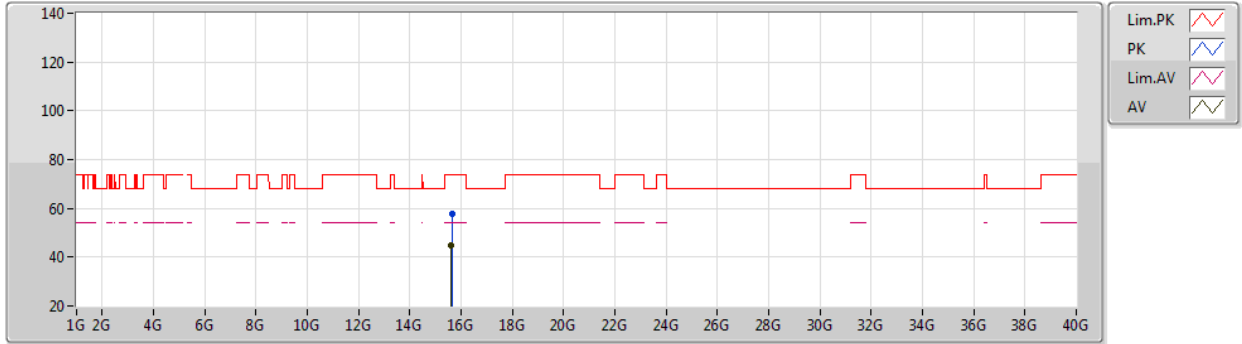


EUT Y_4TX
02-D-C-4
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.6352G	57.80	74.00	-16.20	42.06	3	Vertical	56	2.13	-	38.46	9.28	32.00
AV	15.61008G	44.60	54.00	-9.40	28.79	3	Vertical	56	2.13	-	38.53	9.27	31.99

802.11ax HEW80-BF_Nss1,(MCS0)_4TX

17/01/2020

5210MHz_TX

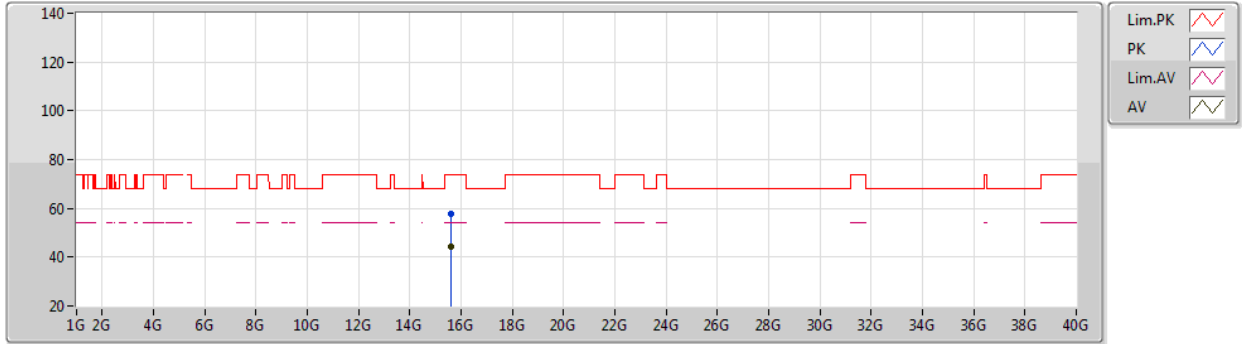


EUT Y_4TX
02-D-C-4
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.61872G	57.67	74.00	-16.33	41.89	3	Horizontal	47	1.57	-	38.51	9.27	32.00
AV	15.6148G	44.48	54.00	-9.52	28.69	3	Horizontal	47	1.57	-	38.52	9.27	32.00

802.11ax HEW80-BF_Nss1,(MCS0)_4TX

17/01/2020

5775MHz_TX

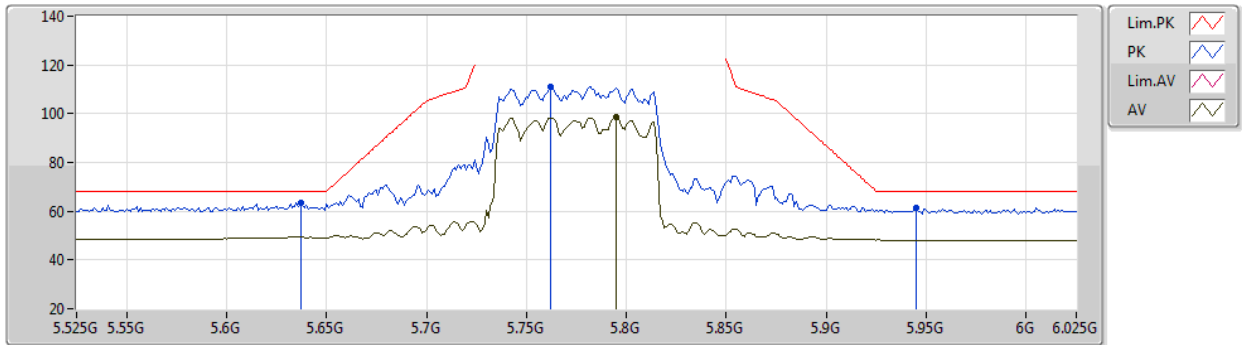


EUT Y_4TX
02-D-C-4-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.637G	63.45	68.20	-4.75	53.74	3	Vertical	25	2.84	-	33.93	6.32	30.54
PK	5.762G	111.22	Inf	-Inf	101.61	3	Vertical	25	2.84	-	33.80	6.38	30.57
AV	5.795G	98.68	Inf	-Inf	89.06	3	Vertical	25	2.84	-	33.80	6.40	30.58
PK	5.945G	61.24	68.20	-6.96	51.44	3	Vertical	25	2.84	-	34.09	6.33	30.62

802.11ax HEW80-BF_Nss1,(MCS0)_4TX

17/01/2020

5775MHz_TX

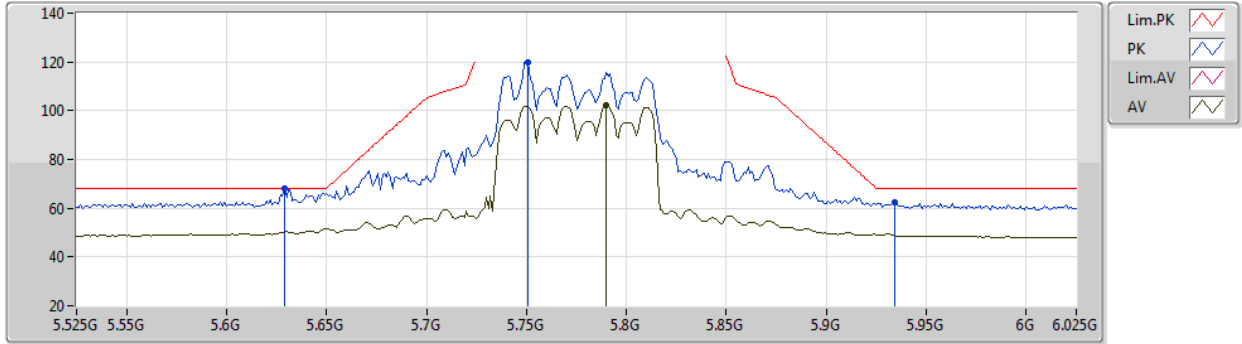


EUT Y_4TX
02-D-C-4-10
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.629G	67.98	68.20	-0.22	58.27	3	Horizontal	182	1.80	-	33.94	6.31	30.54
PK	5.751G	119.83	Inf	-Inf	110.22	3	Horizontal	182	1.80	-	33.80	6.38	30.57
AV	5.79G	102.12	Inf	-Inf	92.50	3	Horizontal	182	1.80	-	33.80	6.40	30.58
PK	5.934G	62.33	68.20	-5.87	52.55	3	Horizontal	182	1.80	-	34.07	6.33	30.62

802.11ax HEW80-BF_Nss1,(MCS0)_4TX

17/01/2020

5775MHz_TX

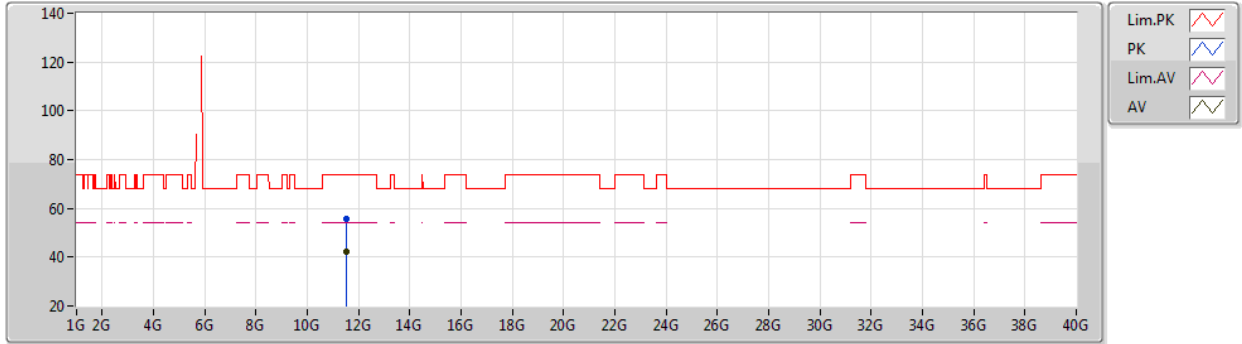


EUT Y_4TX
02-D-C-4
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.54464G	55.49	74.00	-18.51	39.40	3	Vertical	144	1.90	-	38.84	8.87	31.62
AV	11.54504G	42.40	54.00	-11.60	26.31	3	Vertical	144	1.90	-	38.84	8.87	31.62

802.11ax HEW80-BF_Nss1,(MCS0)_4TX

17/01/2020

5775MHz_TX

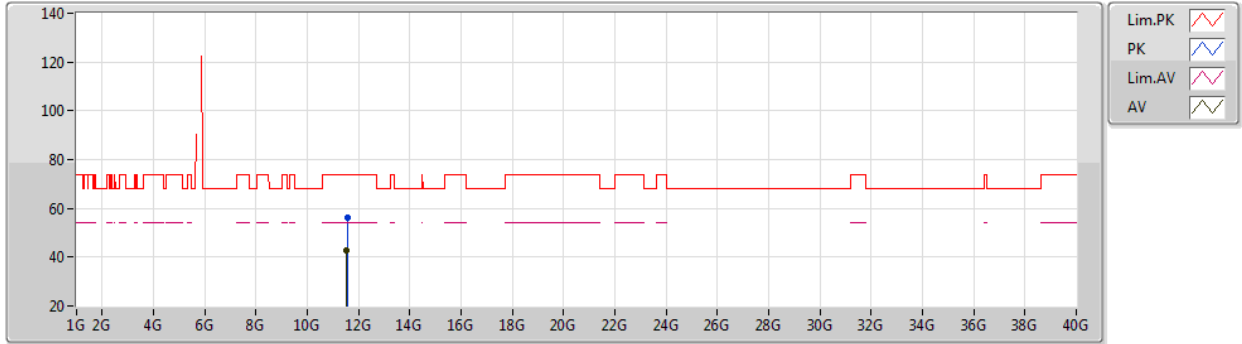

EUT Y_4TX
02-D-C-4
Client Intel AX200

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.5676G	56.14	74.00	-17.86	40.05	3	Horizontal	60	1.32	-	38.85	8.87	31.63
AV	11.54768G	42.92	54.00	-11.08	26.83	3	Horizontal	60	1.32	-	38.84	8.87	31.62

