



TEST REPORT

Report Number: 102241369MPK-013C

Project Number: G102241369

February 04, 2016

Testing performed on the

WiFi/BT Module Card

Model Number: 576253

FCC ID: 2AHLA-576253

IC: 4811A-576253

to

FCC Part 15, Subpart E

RSS-247 Issue 1

For

Bosch Automotive Service Solutions LLC

Test Performed by:

Intertek

1365 Adams Court

Menlo Park, CA 94025 USA

Test Authorized by:

Bosch Automotive Service Solutions LLC

655 Eisenhower Dr.

Owatonna, MN 55060 USA

Prepared by:

Anderson Soungpanya

Date: February 04, 2016

Reviewed by:

Krishna K Vemuri

Date: February 04, 2016

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.

VERIFICATION OF COMPLIANCE

Report No. 102241369MPK-013C


Verification is hereby issued to the named APPLICANT and is VALID ONLY for the equipment identified hereon for use under the rules and regulations listed below.

Equipment Under Test:	WiFi/BT Module Card
Trade Name:	Bosch Automotive Service Solutions LLC
Model No.:	576253
Serial No.:	MPK1511100953-001
Applicant:	Bosch Automotive Service Solutions LLC
Contact:	Eric Vande Zande
Address:	655 Eisenhower Dr. Owatonna, MN 55060
Country	USA
Tel. Number:	(507) 455-4437
Email:	eric.vandezande@us.bosch.com
Applicable Regulation:	FCC Part 15, Subpart E RSS-247 Issue 1
Date of Test:	November 03, 2015 to January 13, 2016

We attest to the accuracy of this report:



Anderson Soungpanya
EMC Project Engineer



Krishna K Vemuri
EMC Senior Staff Engineer

TABLE OF CONTENTS

1.0	Introduction.....	5
1.1	Summary of Tests.....	5
2.0	General Description	6
2.1	Product Description.....	6
2.2	Related Submittal(s) Grants	7
2.3	Test Methodology	7
2.4	Test Facility.....	7
2.5	Measurement Uncertainty	7
3.0	System Test Configuration.....	8
3.1	Support Equipment	8
3.2	Block Diagram of Test Setup	8
3.3	Justification	9
3.4	Mode of Operation During Test	9
3.5	Modifications required for Compliance	9
3.6	Additions, deviations and exclusions from standards.....	9
4.0	Measurement Results.....	10
4.1	Emission Bandwidth and 99% Occupied Bandwidth.....	10
4.1.1	Procedure	10
4.1.2	Test Result	11
4.2	Maximum Conducted Output Power.....	22
4.2.1	Requirement.....	22
4.2.2	Procedure	22
4.2.3	Test Results	23
4.3	Peak Power Spectral Density.....	34
4.3.1	Requirement.....	34
4.3.2	Procedure	34
4.3.3	Test Result	35
4.4	Frequency stability	46
4.4.1	Requirement.....	46
4.4.2	Procedure	46
4.4.3	Result	47
4.5	Transmitter Radiated Emissions.....	48
4.5.1	Requirement.....	48
4.5.2	Procedure	49
4.5.3	Field Strength Calculation.....	50
4.5.4	Antenna-port conducted measurements.....	51
4.5.6	General Procedure for conducted measurements in restricted bands.....	51
4.5.7	Test Results	51
4.5.8	Test setup photographs.....	97
4.6	Dynamic Frequency Selection (DFS).....	100
4.6.1	Requirement.....	100



4.6.2	Procedure	103
4.6.3	Test Results	108
6.0	Document History	115



1.0 Introduction

1.1 Summary of Tests

Test	Reference FCC	Reference RSS-247	Result
26 dB Emission Band width and 99% Occupied Bandwidth	15.407(a)(1)(2)(3)	RSS-247, 6.2.1	Complies
Conducted Output Power	15.407(a)(1)(2)(3)	RSS-247, 6.2.1	Complies
Peak Power Spectral Density	15.407(a)(1)(2)(3)	RSS-247, 6.2.1	Complies
Undesirable Emissions	15.407(b)(1-8)	RSS-247, 6.2.1	Complies
Transmitter Radiated Emissions	15.407(b)(1-8) 15.209, 15.205	RSS-247, 6.2.1	Complies
Frequency stability	15.407(g)	RSS-Gen	Complies
Transmit power control (TPC)	15.407(h)(1)	RSS-247, 6.2.1	NA, EUT is less 250mW EIRP
Radar Detection Function of Dynamic Frequency Selection (DFS)	15.407(h)(2)	RSS-247, 6.3	Complies
Antenna Requirement	15.203	RSS-Gen	Complies. The EUT uses internal antenna and a unique connector

EUT receive date: October 19, 2015

EUT receive condition: The pre-production version of the EUT was received in good condition with no apparent damage. As declared by the Applicant, it is identical to the production units.

Test start date: November 03, 2015

Test completion date: January 13, 2016

The test results in this report pertain only to the item tested.



2.0 General Description

2.1 Product Description

Bosch Automotive Service Solutions LLC supplied the following description of the EUT:

This WiFi/BT Card is utilized in various automotive diagnostic equipment. One main function is for WiFi connections of the diagnostic equipment to WiFi Access Points. It may also be used to connect two diagnostic devices together in WiFi Direct mode. The BT is used to pair with Multi-Media equipment in vehicles for diagnostic purposes. It may also be used to pair with other BT devices as required.

The information about the 5GHz radio, installed in the model 576253, is presented below.

Applicant	Bosch Automotive Service Solutions LLC
Model No.	576253
FCC ID	2AHLA-576253
IC	4811A-576253
Use of Product	WIFI Module (Client without radar detection)
Rated RF Output	15.95 dBm
Frequency Range	5470 – 5725 MHz
Type of modulation	OFDM
Antenna(s) & Gain	YAGEO - ANT-X150P111B24553; Internal Antenna, 3.4 dBi peak gain Taoglas Antenna Solution - FXP.840.07.0055B; Internal Antenna, 2.5 dBi peak gain
Manufacturer Name & Address	Bosch Automotive Service Solutions LLC 655 Eisenhower Dr. Owatonna, MN 55060 USA

The EUT supports the following configurations:

Number	Frequency, MHz	802.11a/n/ac 20MHz Channels		802.11n/ac 40MHz Channels		802.11ac 80MHz Channels	
100	5500	√	X				
102	5510			√	X		
104	5520	√					
106	5530					√	X
108	5540	√					
110	5550			√	X		
112	5560	√					
116	5580	√	X				
132	5660	√					
134	5670			√	X		
136	5680	√					
140	5700	√	X				

List of channels:

√ - available

X - tested



2.2 Related Submittal(s) Grants

None.

2.3 Test Methodology

Antenna conducted measurements were performed according to the FCC documents “Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E” (789033 D02 General U-NII Test Procedures New Rules v01r01).

Both AC mains line-conducted and radiated emissions measurements were performed according to the procedures in ANSI C63.4. Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Data Sheet**" of this Application.

All other measurements were made in accordance with the procedures in part 2 of CFR 47.

2.4 Test Facility

The test site used to collect the radiated data is site 1 (10-m semi-anechoic chamber). This test facility and site measurement data have been fully placed on file with the FCC, IC and A2LA accredited.

2.5 Measurement Uncertainty

Compliance with the limits was based on the results of the measurements and doesn't take into account the measurement uncertainty.

Estimated Measurement Uncertainty

Measurement	Expanded Uncertainty (k=2)		
	0.15 MHz – 1 GHz	1 GHz – 6 GHz	> 6 GHz
RF Power and Power Density – antenna conducted	1.1 dB	1.5 dB	–
Unwanted emissions - antenna conducted	1.2 dB	1.7 dB	2.0 dB
Bandwidth – antenna conducted	50 Hz	100 Hz	–
Radiated emissions	4.2 dB	5.4 dB	
AC mains conducted emissions	2.4 dB	-	-


3.0 System Test Configuration

3.1 Support Equipment

Description	Manufacturer	Model No./ Part No.
Power Adapter	I.T.E Power Supply	PW172KB1500B02
Laptop	Acer	Aspire E1-571-6811

3.2 Block Diagram of Test Setup

Antenna was removed and co-axial connector with a cable was installed for Conducted Measurements.
50Ohm Load was used for Radiated Measurements.

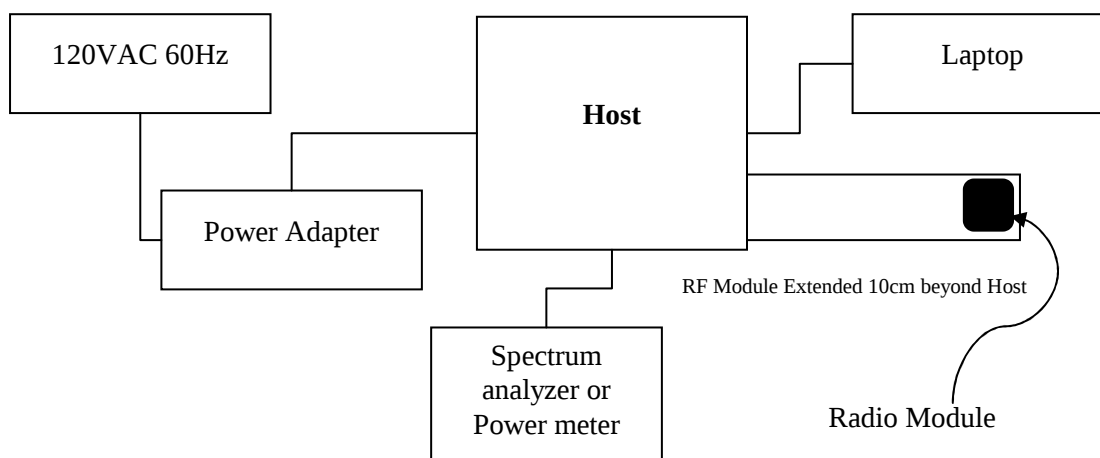

S = Shielded	F = With Ferrite
U = Unshielded	m = Meter



3.3 Justification

Preliminary testing was performed for all modulation/data rate modes. The following modes, in which the highest power was detected, were selected for final measurements:

OFDM, 6MB/s – for 802.11a

OFDM, MCS0 – for 802.11n/ac 20MHz

OFDM, MCS0 – for 802.11n/ac 40MHz

OFDM, MCS0 – for 802.11ac 80MHz

3.4 Mode of Operation During Test

During transmitter testing, the transmitter was setup to transmit continuously using the RF power setting below. Their corresponding output power in dBm can be found in section 4.2 of this report.

Ch.	Freq.	802.11a	802.11n 20	802.11n 40	802.11ac 80
	MHz	Settings	Settings	Settings	Settings
100	5500	17	16	--	---
102	5510	--	--	15	---
106	5530	---	---	---	16
110	5550	---	---	15	---
116	5580	17	17	---	---
134	5670	---	---	15	---
140	5700	16	15	---	

3.5 Modifications required for Compliance

Intertek installed no modifications during compliance testing in order to bring the product into compliance.

3.6 Additions, deviations and exclusions from standards

No additions, deviations or exclusion have been made from standard.



4.0 Measurement Results

4.1 Emission Bandwidth and 99% Occupied Bandwidth

15.407(a)(1)(2)

4.1.1 Procedure

The Procedure, described in the FCC Publication 789033 D02 General U-NII Test Procedures New Rules v01r01, was used. Specifically Section C for Emission Bandwidth and Minimum Emission Bandwidth for the band 5.725-5.850 GHz. Section D was used for 99% Occupied Bandwidth.

The antenna port of the EUT was connected to the input of a spectrum analyzer (SA). For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier.

The Occupied bandwidth was measured using the build-in spectrum analyzer facility for 99% power bandwidth measurement.

Tested By:	Anderson Soungpanya
Test Date:	November 9, 2015



4.1.2 Test Result

Refer to the following plots for the test result:

Mode	Channel	Frequency, MHz	26-dB Bandwidth, MHz	Occupied Bandwidth, MHz	Plot #
802.11a	100	5500	22.115	17.460	1.1
	116	5580	21.795	17.440	1.2
	140	5700	21.923	17.400	1.3
802.11n 20MHz	100	5500	22.491	18.520	1.4
	116	5580	21.994	18.380	1.5
	140	5700	22.115	18.420	1.6
802.11n 40MHz	102	5510	40.497	36.610	1.7
	110	5550	40.321	36.610	1.8
	134	5670	40.209	36.575	1.9
802.11ac 80MHz	106	5530	82.692	75.950	1.10

Plot 1. 1

802.11a 5500MHz



* RBW 300 kHz

Delta 2 [T1]

* VBW 1 MHz

0.01 dB


Ref 5 dBm

Att 10 dB

SWT 20 ms

22.115384615 MHz


1 PK
VIEW

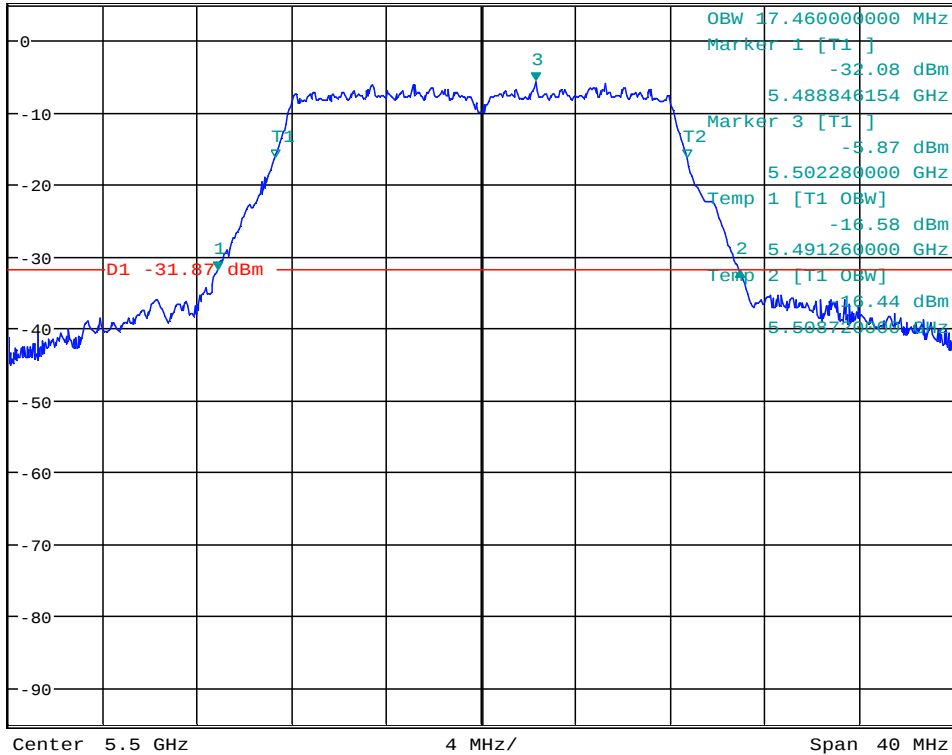

Date: 9.NOV.2015 09:03:01


Plot 1.2

802.11a 5580MHz

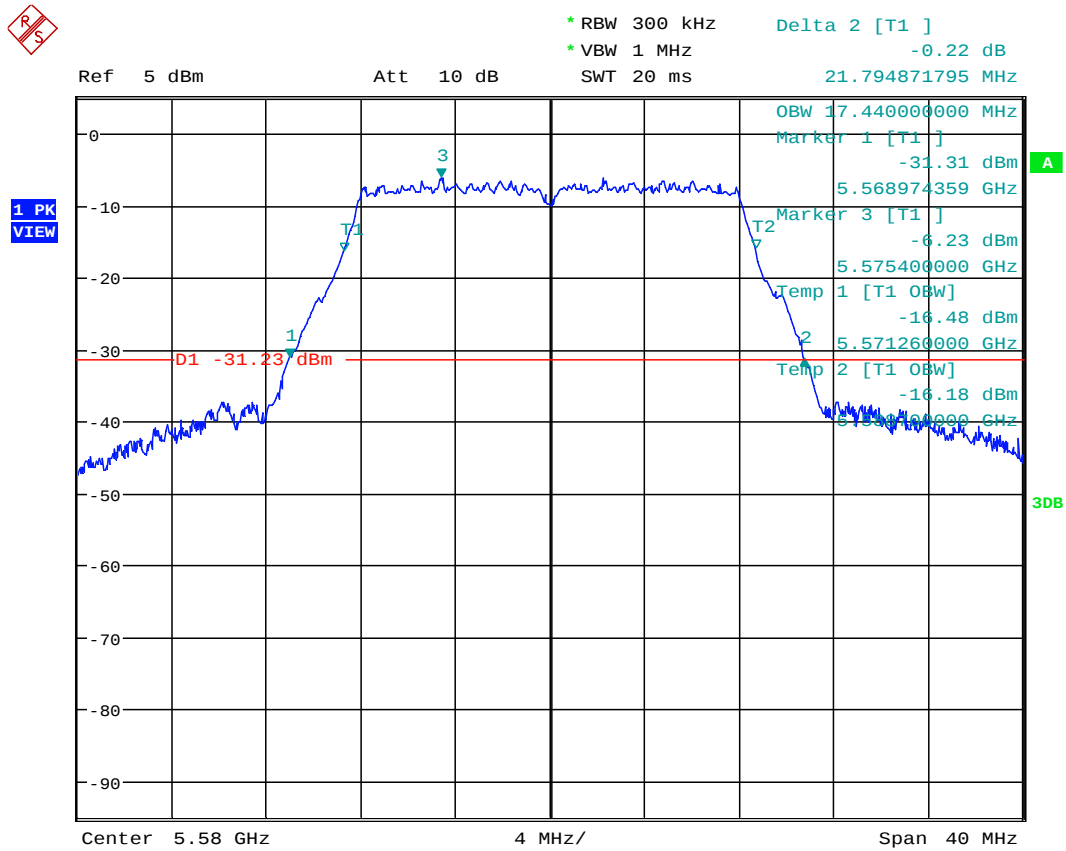

Date: 9.NOV.2015 09:06:54


Plot 1.3
802.11a 5700MHz

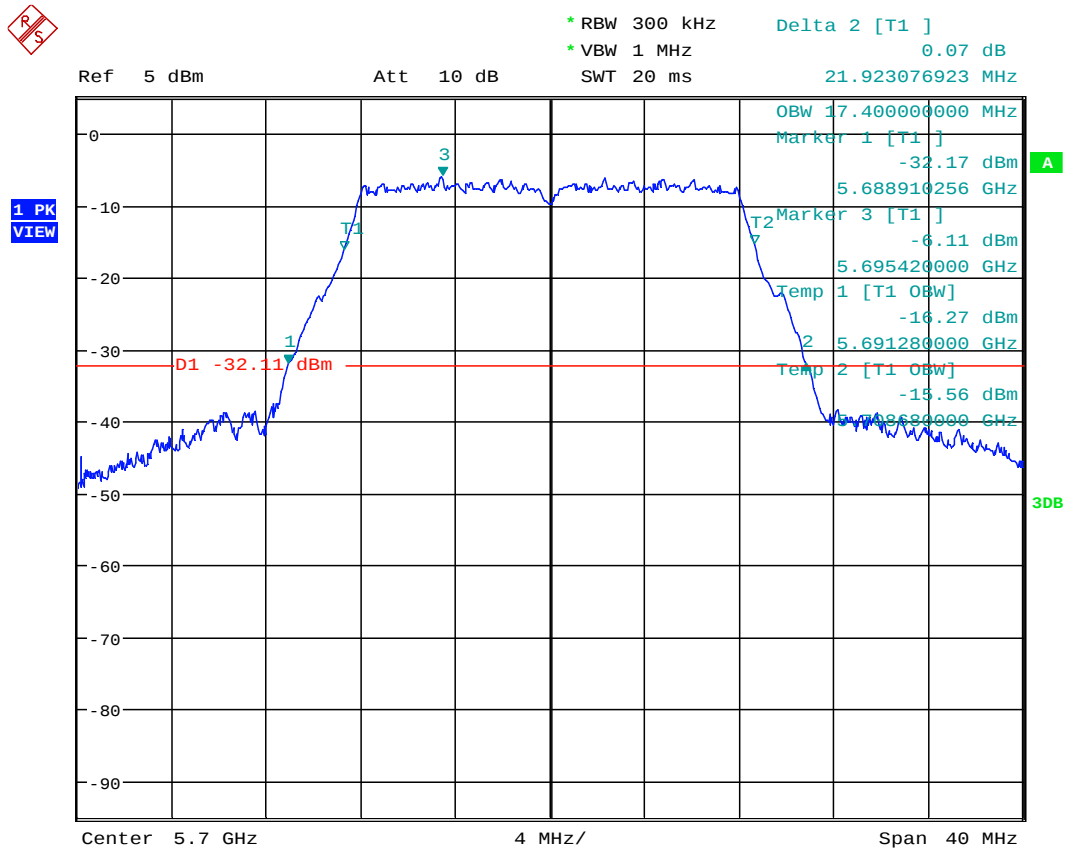

Date: 9.NOV.2015 09:21:12

Plot 1.4


802.11n 20MHz, 5500MHz

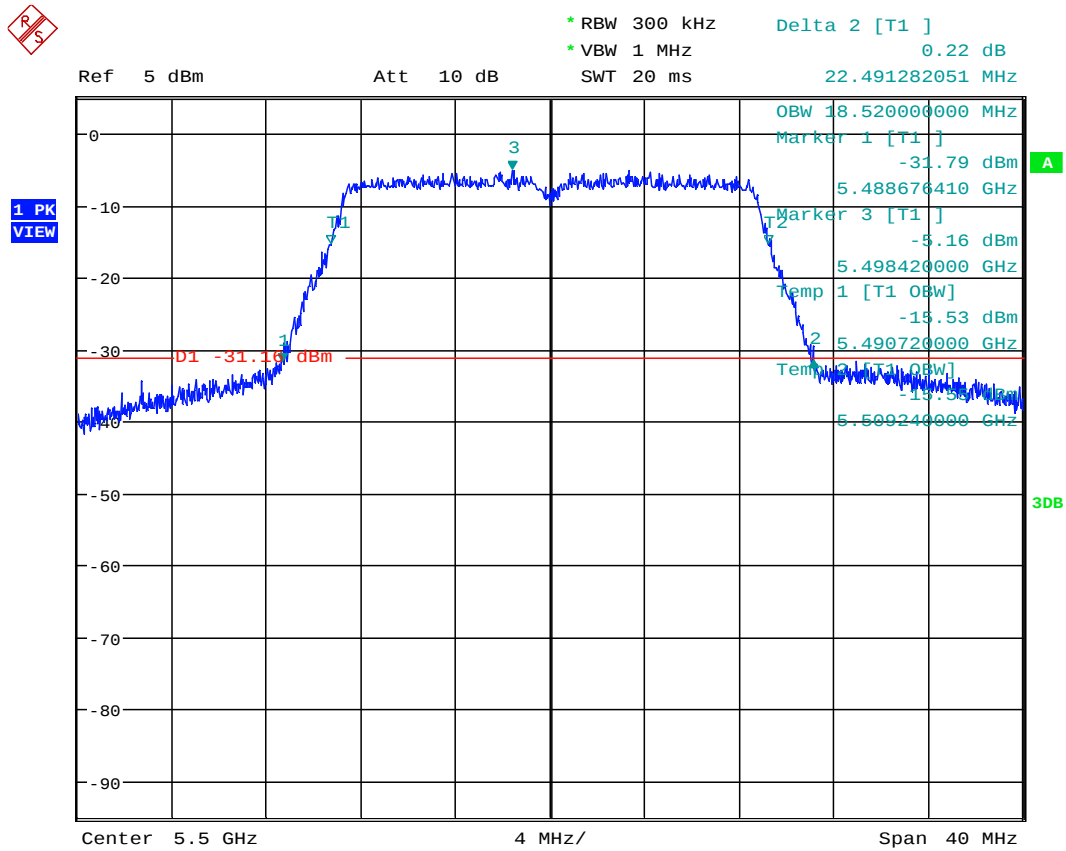

Date: 9.NOV.2015 09:59:37


Plot 1.5

802.11n 20MHz, 5580MHz

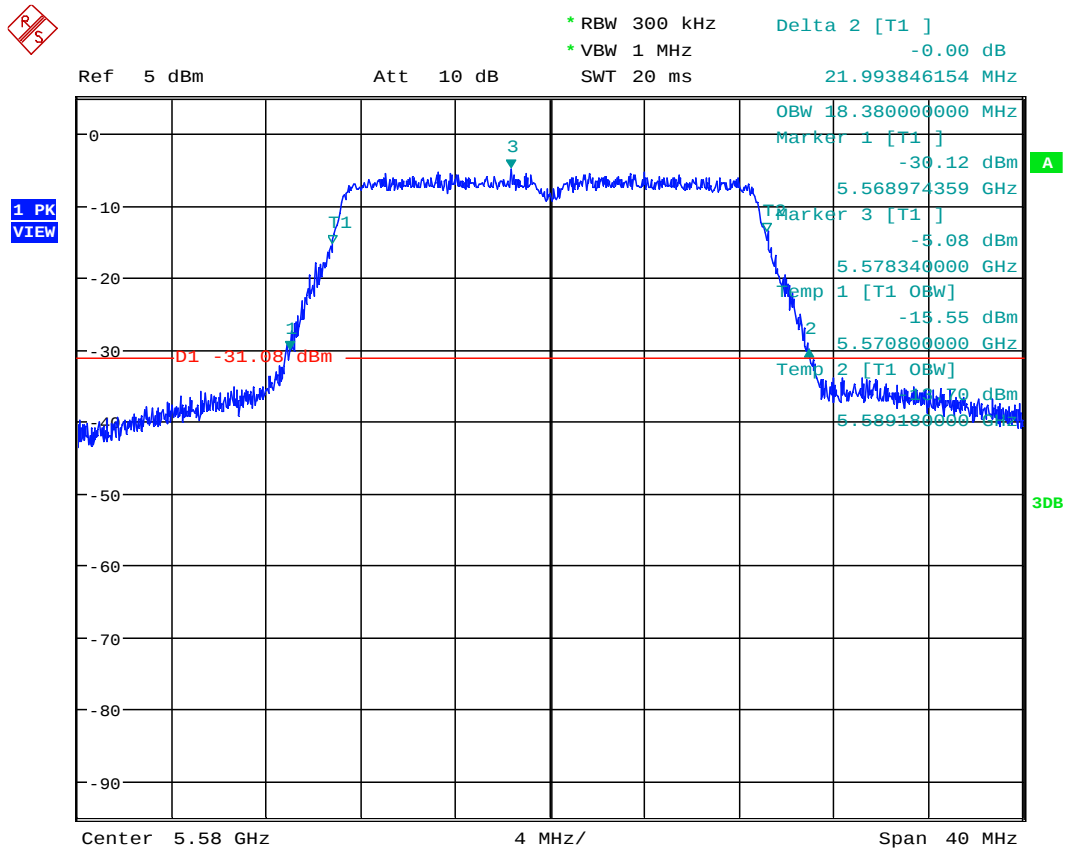

Date: 9.NOV.2015 09:58:08


Plot 1. 6 802.11n 20MHz, 5700MHz

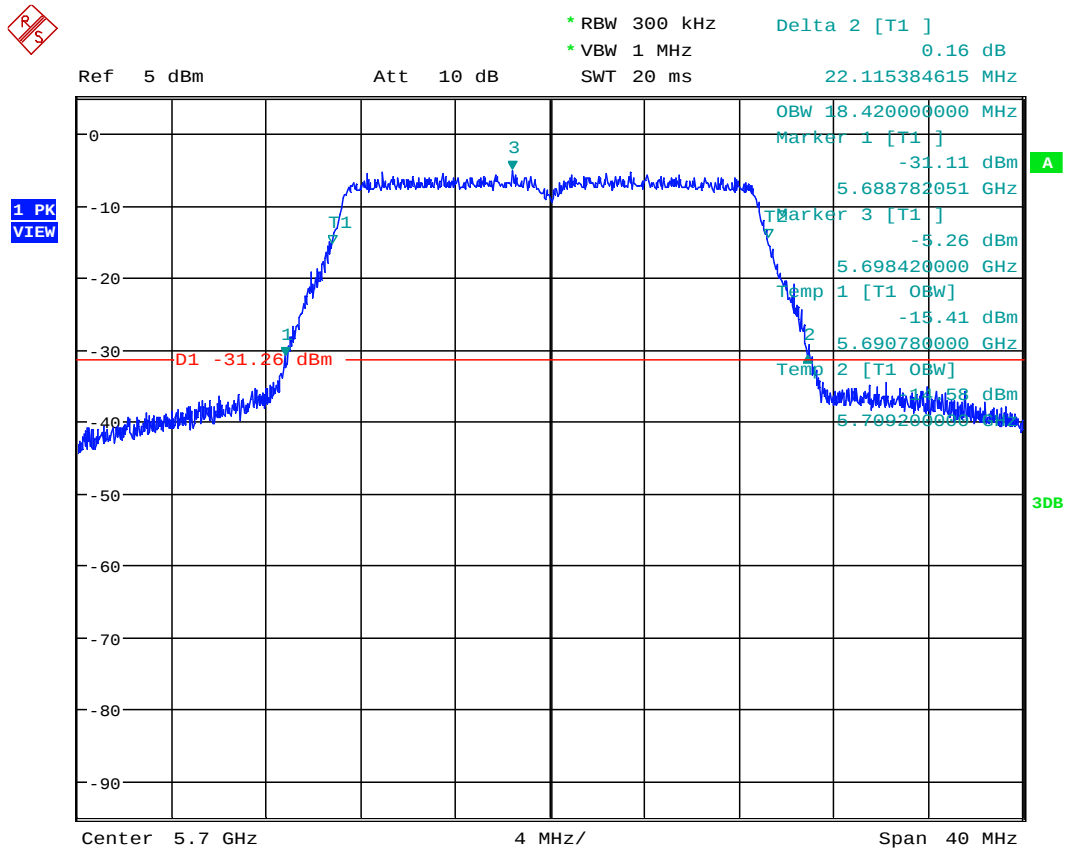

Date: 9.NOV.2015 09:56:37

Plot 1.7


802.11n 40MHz, 5510MHz

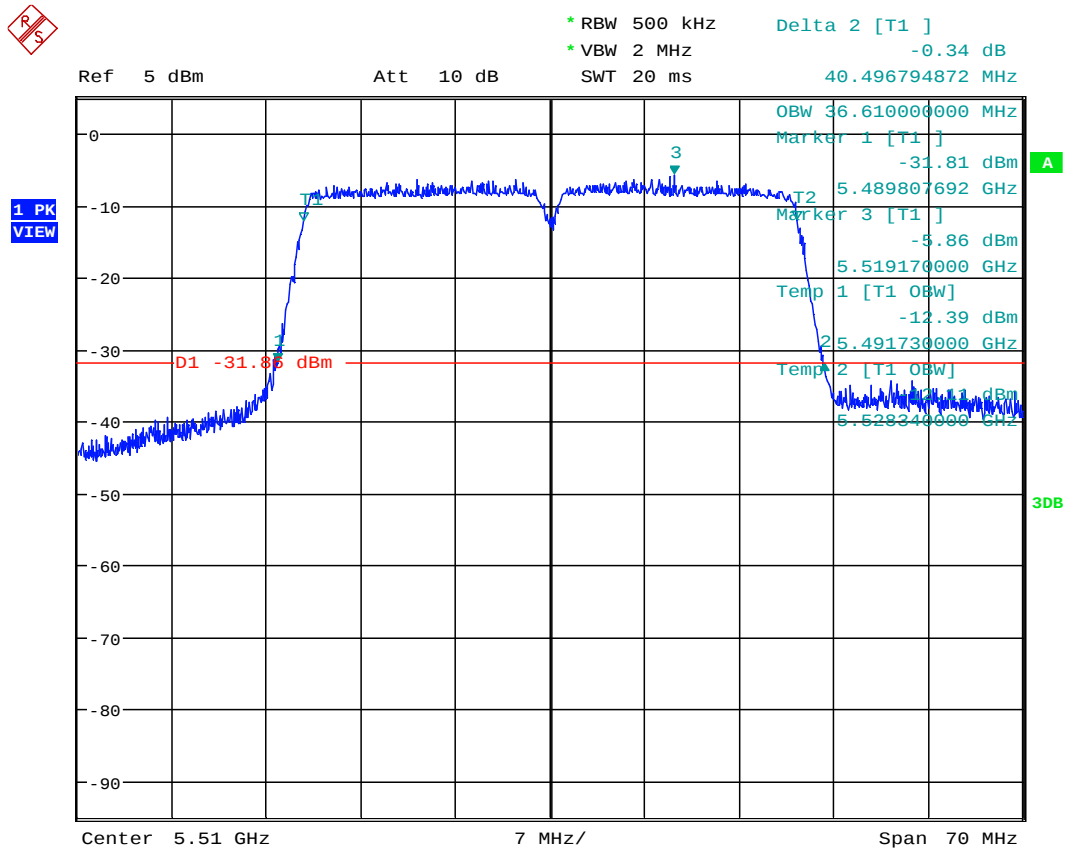

Date: 9.NOV.2015 12:52:48

Plot 1. 8


802.11n 40MHz, 5550MHz

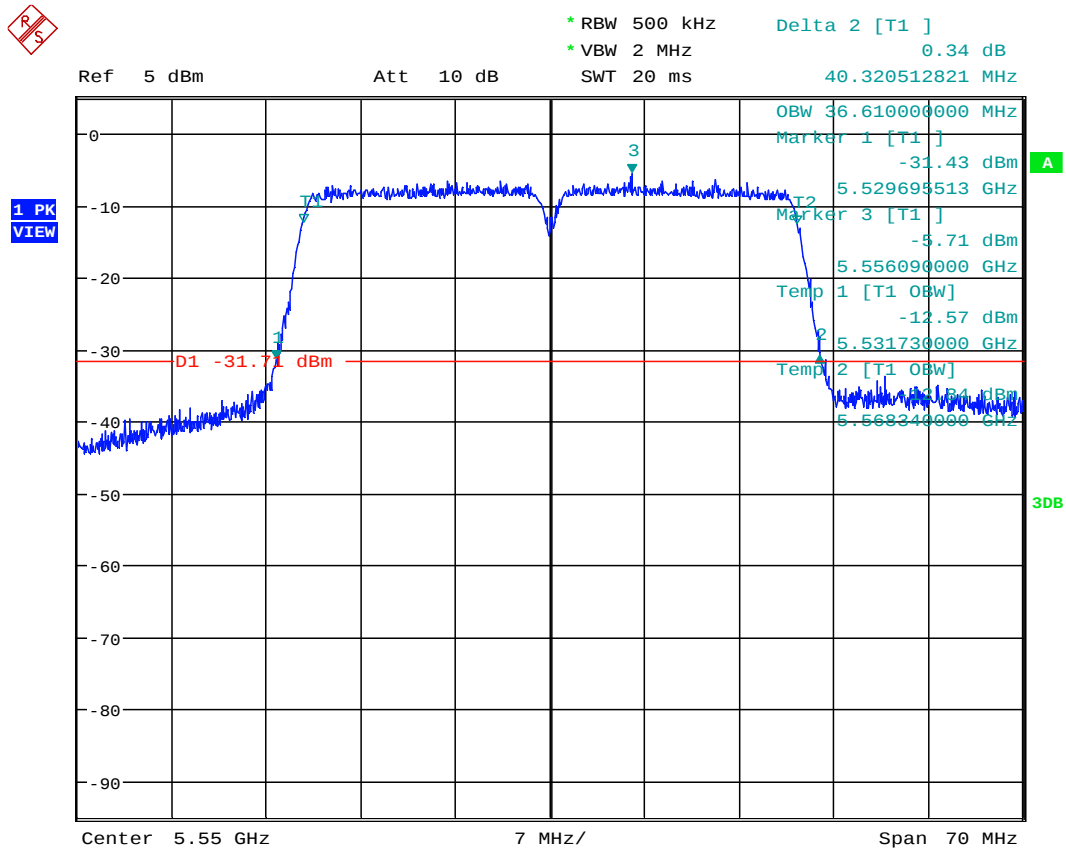

Date: 9.NOV.2015 12:57:01

Plot 1.9


802.11n 40MHz, 5670MHz

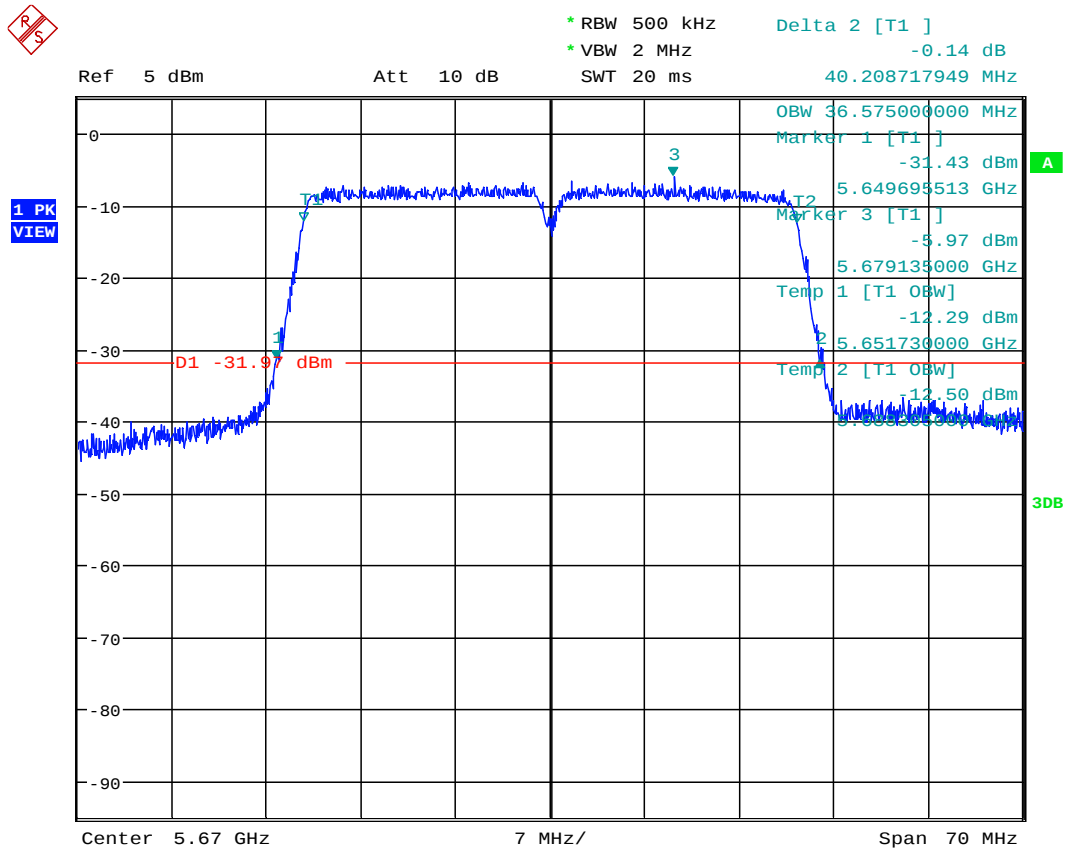

Date: 9.NOV.2015 12:58:09

Plot 1. 10

802.11ac 80MHz, 5530MHz

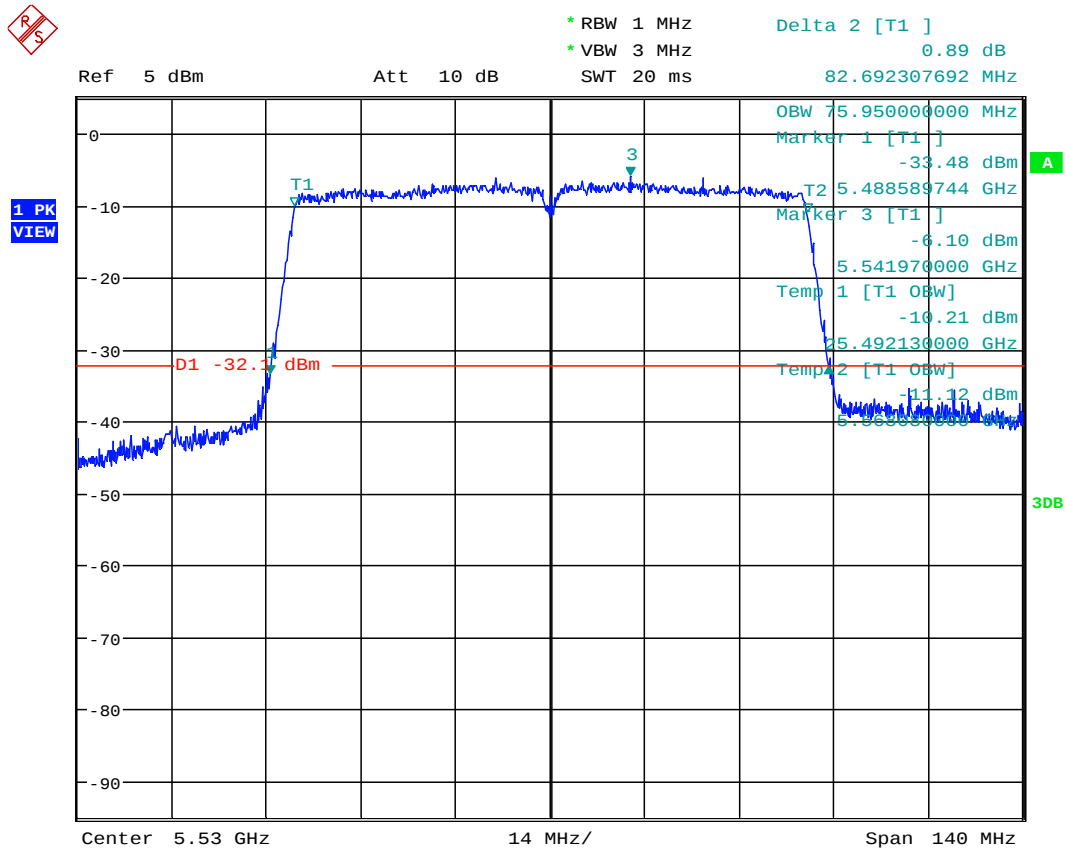

Date: 9.NOV.2015 13:10:49



4.2 Maximum Conducted Output Power FCC Rule 15.407(a)(1)(iv)

4.2.1 Requirement

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

.

4.2.2 Procedure

The Procedure, described in the FCC Publication 789033 D02 General U-NII Test Procedures New Rules v01r01, was used. Specifically Section E (2) (c) Method SA-1 Alternative for Maximum Conducted Output Power

The antenna port output of the EUT was connected to the input of a spectrum analyzer to measure the Maximum Conducted Transmitter Output Power.

Tested By:	Anderson Soungpanya
Test Date:	December 4-7, 2015




4.2.3 Test Results

Refer to the following plots for the test result:


Mode	Channel	Frequency, MHz	Conducted power (average) dBm	Conducted power Limit dBm	Plot #
802.11a	100	5500	14.85	24	2.1
	116	5580	15.12	24	2.2
	140	5700	14.48	24	2.3
802.11n 20MHz	100	5500	14.34	24	2.4
	116	5580	15.95	24	2.5
	140	5700	14.48	24	2.6
802.11n 40MHz	102	5510	13.85	24	2.7
	110	5550	14.02	24	2.8
	134	5670	13.64	24	2.9
802.11ac 80MHz	106	5530	12.75	24	2.10

Plot 2.1
802.11a, 5500MHz

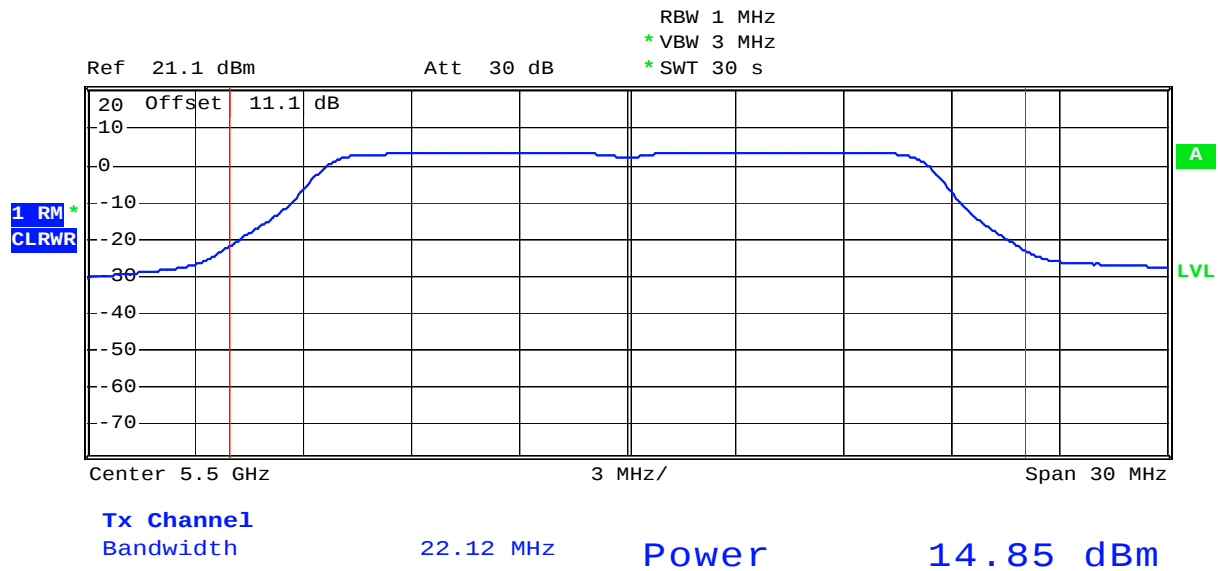


Plot 2. 2

802.11a, 5580MHz

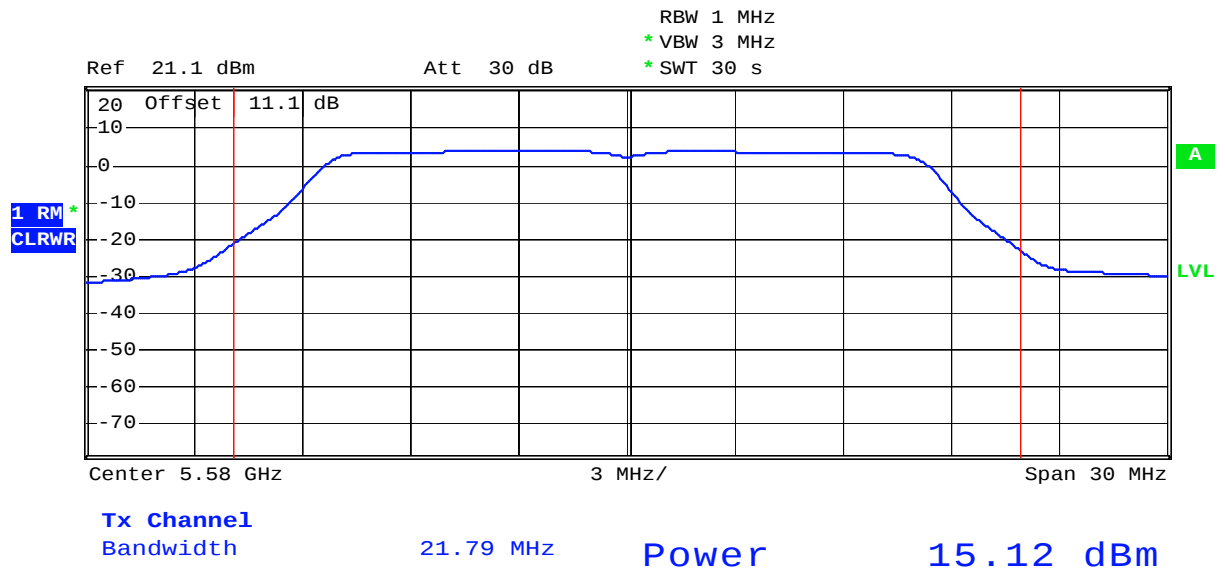


Plot 2.3

802.11a, 5700MHz

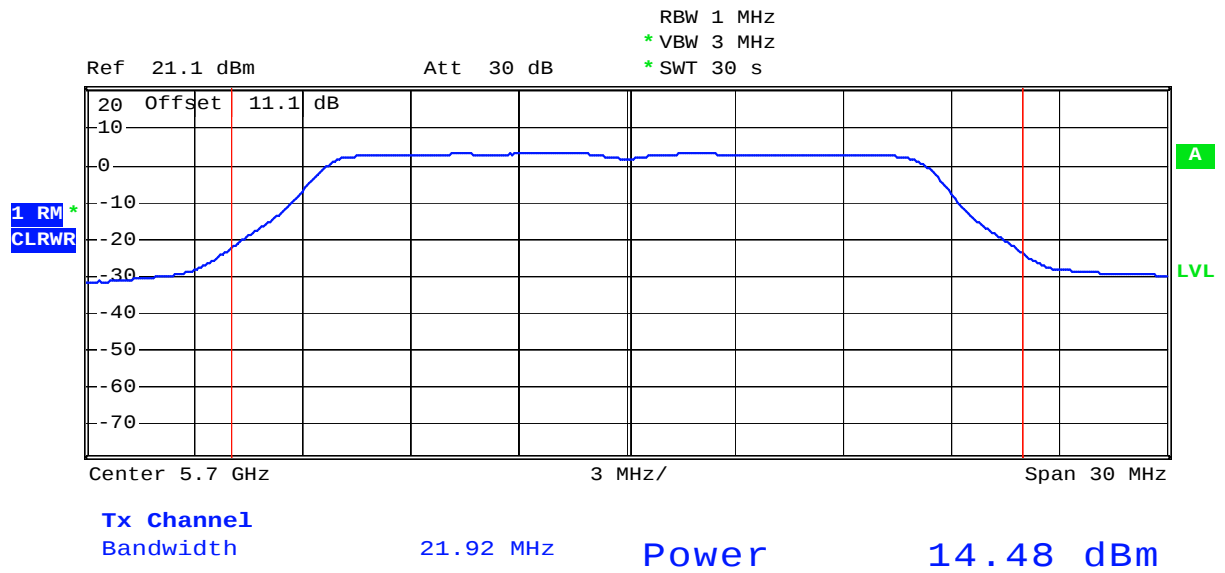


Plot 2.4

802.11n 20MHz, 5500MHz

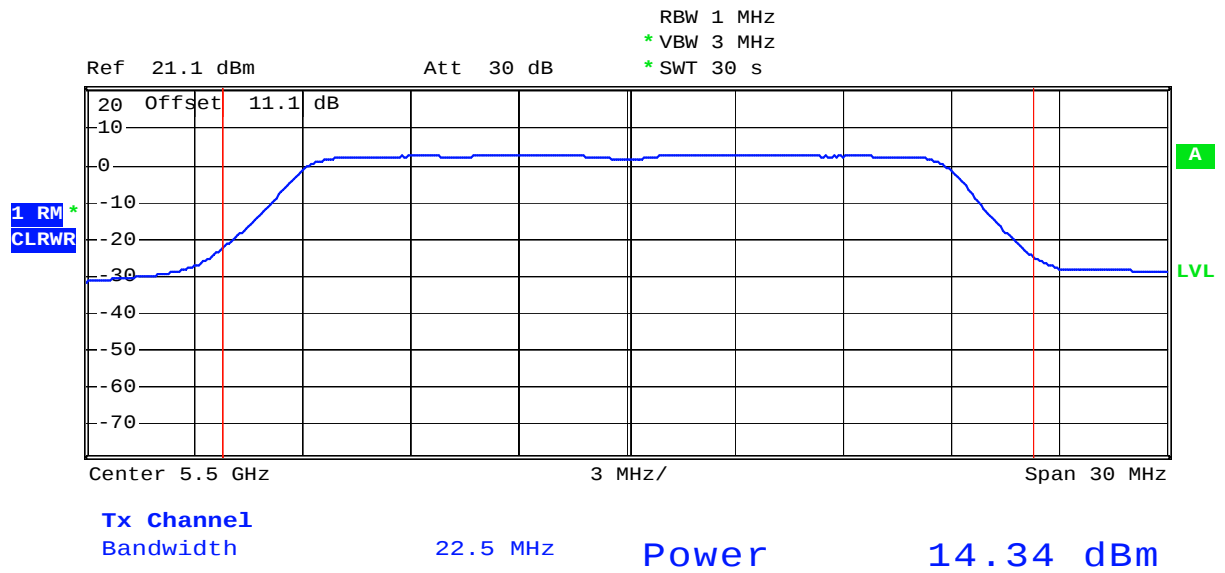


Plot 2.5

H802.11n 20MHz, 5580MHz

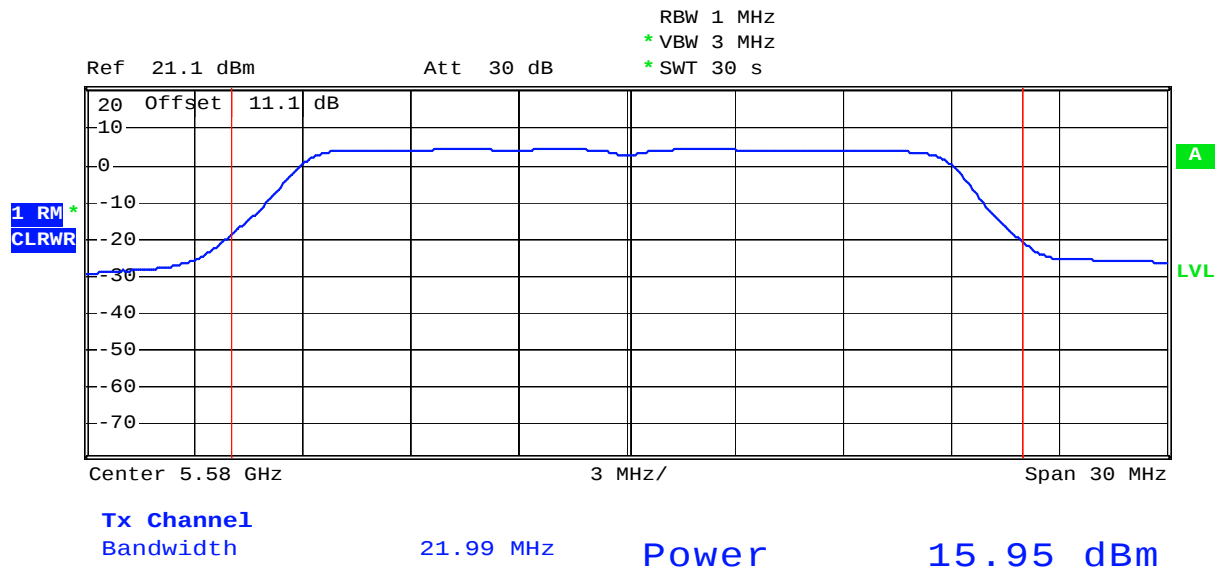


Plot 2. 6

802.11n 20MHz, 5700MHz

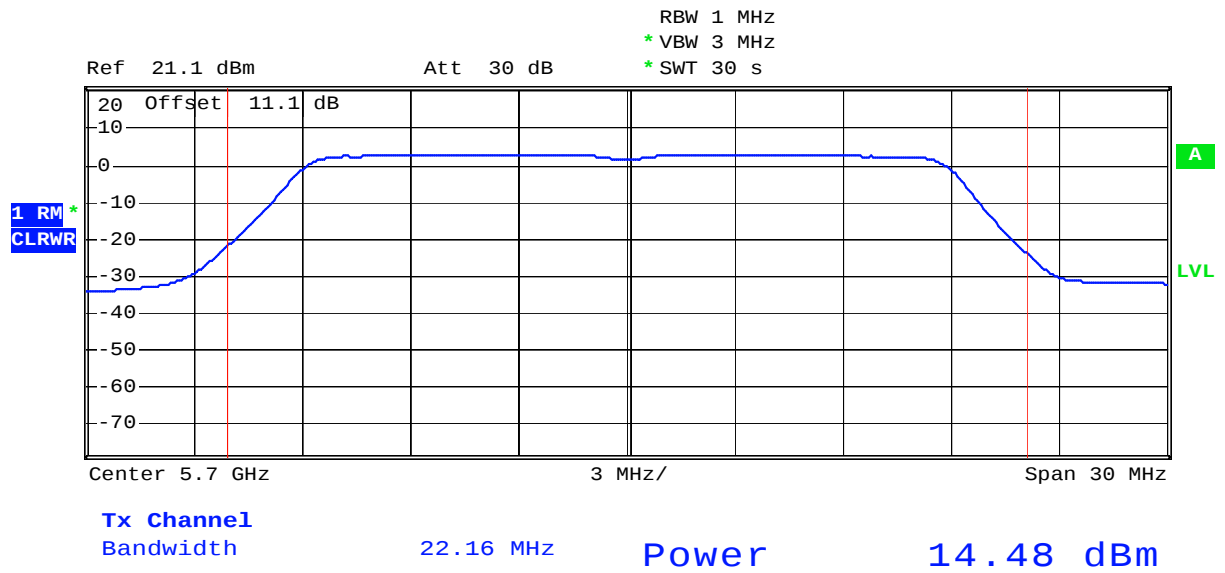


Plot 2.7

802.11n 40MHz, 5510MHz

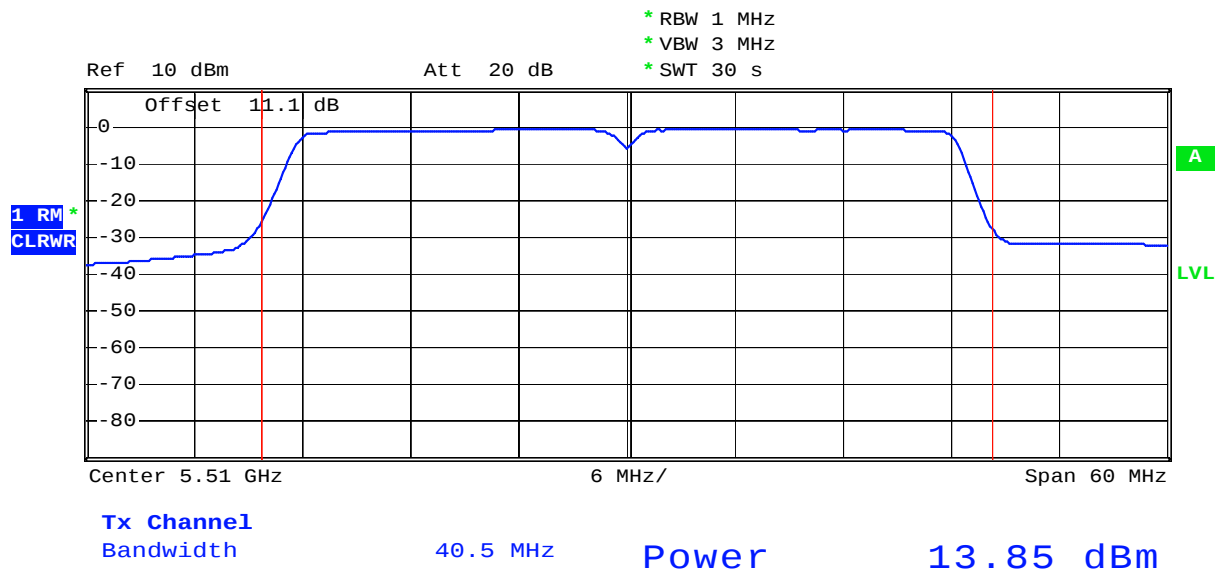


Plot 2. 8

802.11n 40MHz, 5550MHz

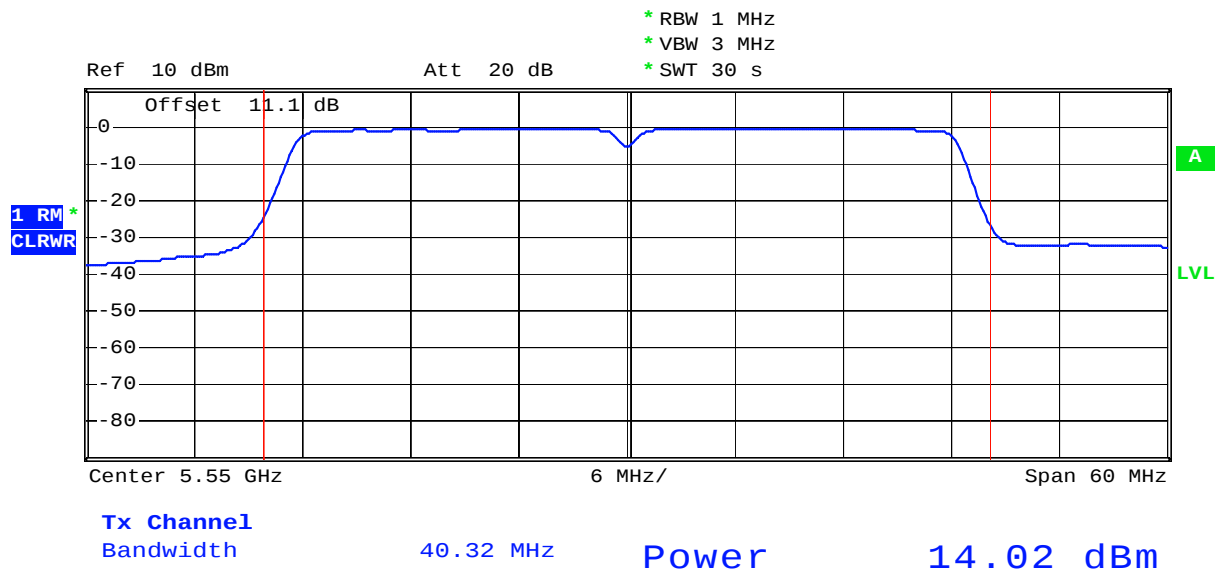


Plot 2.9

802.11n 40MHz, 5670MHz

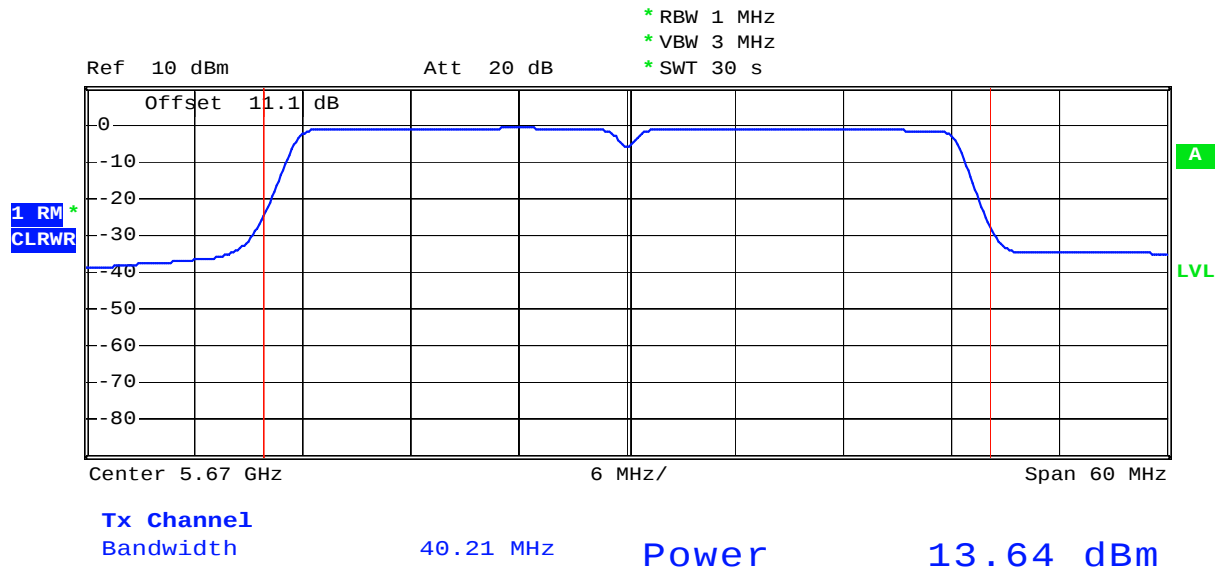

Plot 2. 10

H802.11ac 80MHz, 5530MHz

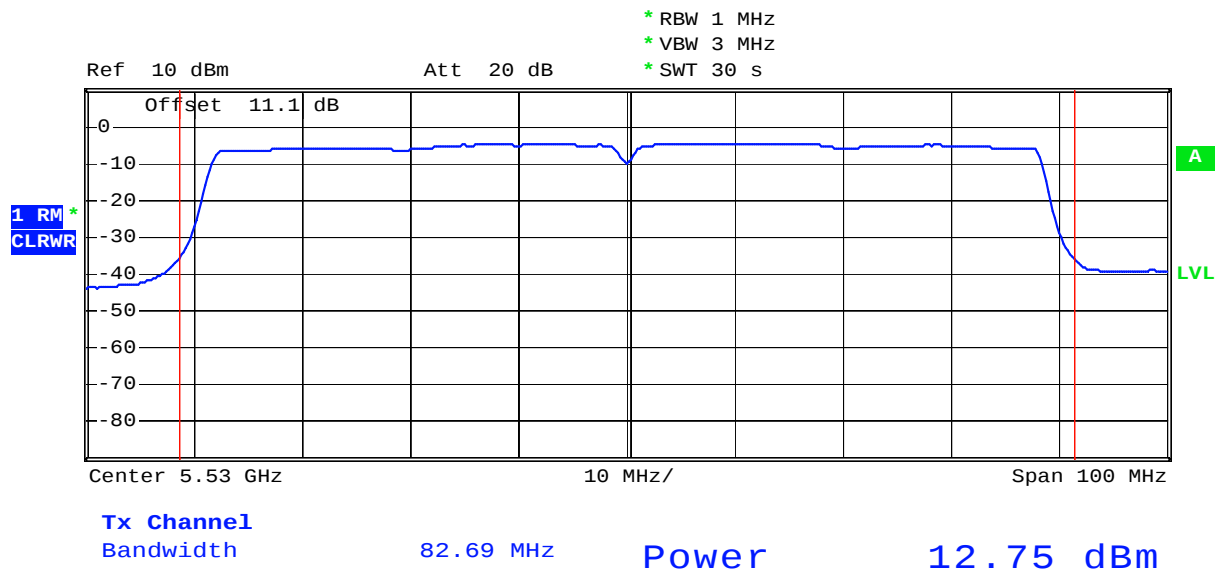



4.3 Peak Power Spectral Density FCC Rule 15.407(a)(1)(iv)

4.3.1 Requirement

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3.2 Procedure

Each antenna port of the EUT was connected to the input of a spectrum analyzer to measure the Peak Power Spectral Density (PPSD) and recorded.

The Procedure, described in the FCC Publication 789033 D02 General U-NII Test Procedures New Rules v01r01, was used. Specifically procedure from Section F was utilized for Maximum Power Spectral Density (PSD).

Tested By:	Anderson Soungpanya
Test Date:	December 7, 2015




4.3.3 Test Result

Refer to the following plots for the test result:

Mode	Channel	Frequency, MHz	PSD(Peak) dBm	PSD Limit dBm	Plot #
802.11a	100	5500	2.89	11	3.1
	116	5580	3.02	11	3.2
	140	5700	2.62	11	3.3
802.11n 20MHz	100	5500	2.79	11	3.4
	116	5580	3.07	11	3.5
	140	5700	2.56	11	3.6
802.11n 40MHz	102	5510	-1.88	11	3.7
	110	5550	-1.98	11	3.8
	134	5670	-2.27	11	3.9
802.11ac 80MHz	106	5530	-4.89	11	3.10


Plot 3.2

802.11a, 5500MHz

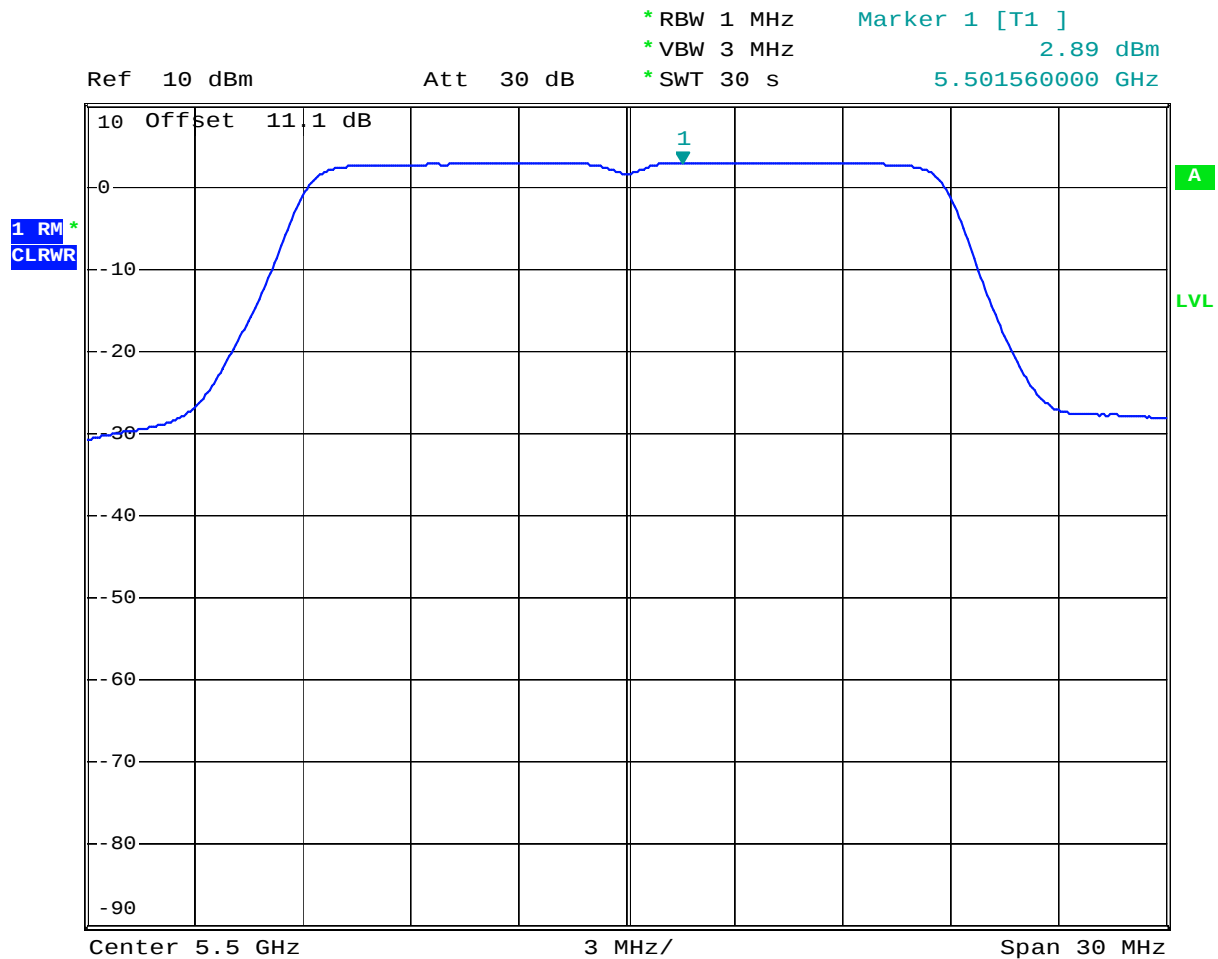


Date: 7.DEC.2015 14:36:05

Plot 3.2
802.11a, 5580MHz

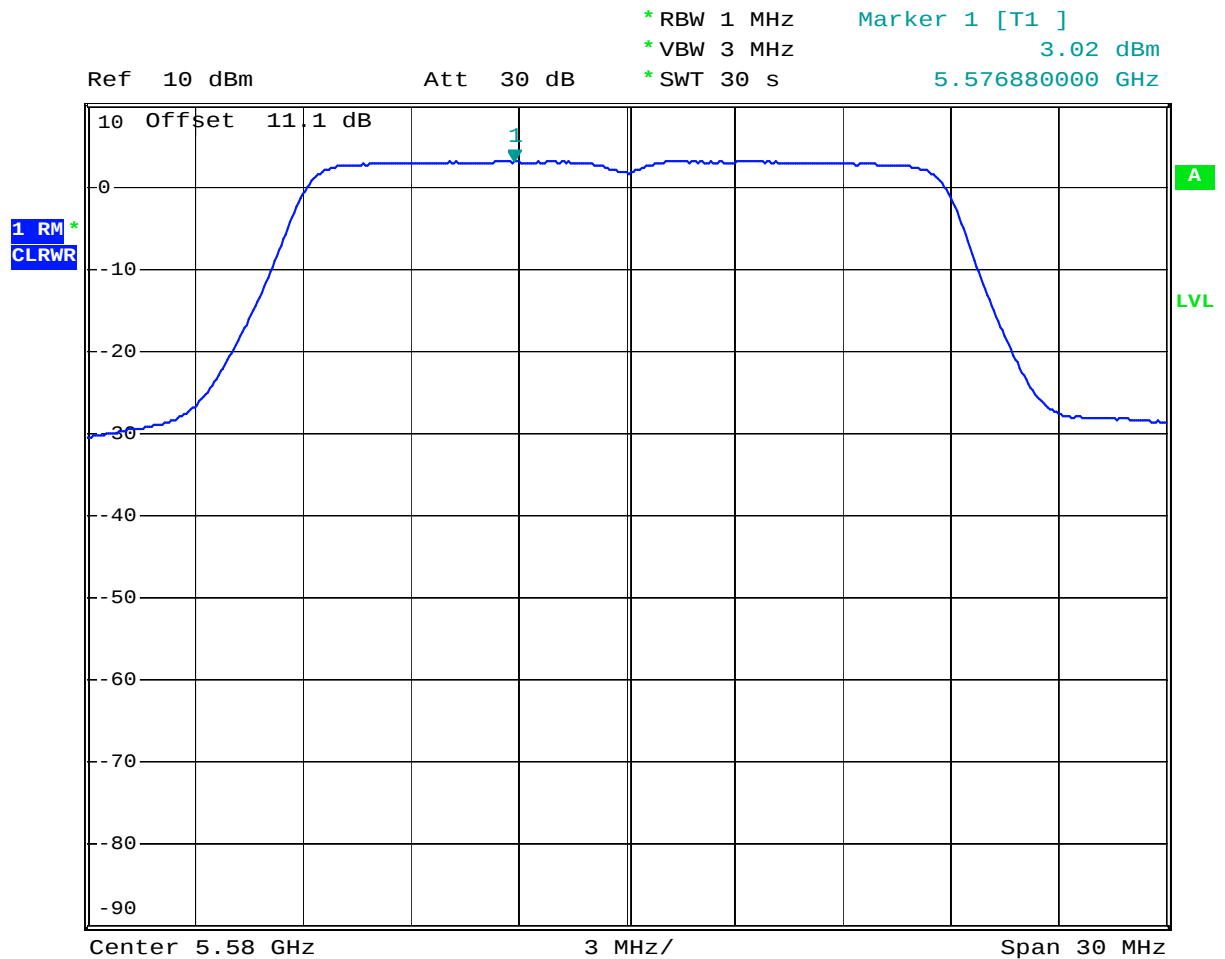

Date: 7.DEC.2015 14:37:39


Plot 3.3
802.11a, 5700MHz

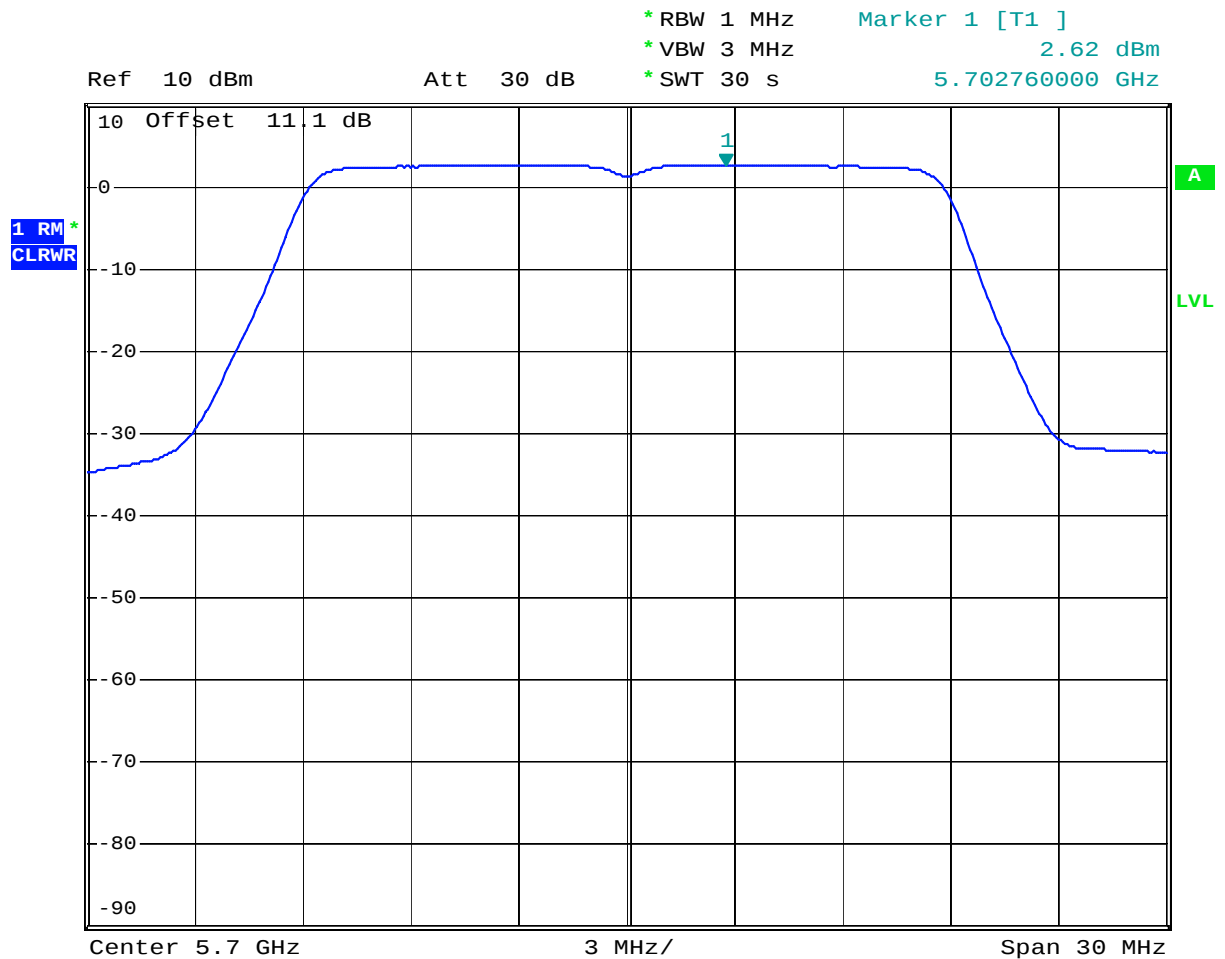

Date: 7.DEC.2015 14:39:19

Plot 3.4


802.11n 20MHz, 5500MHz

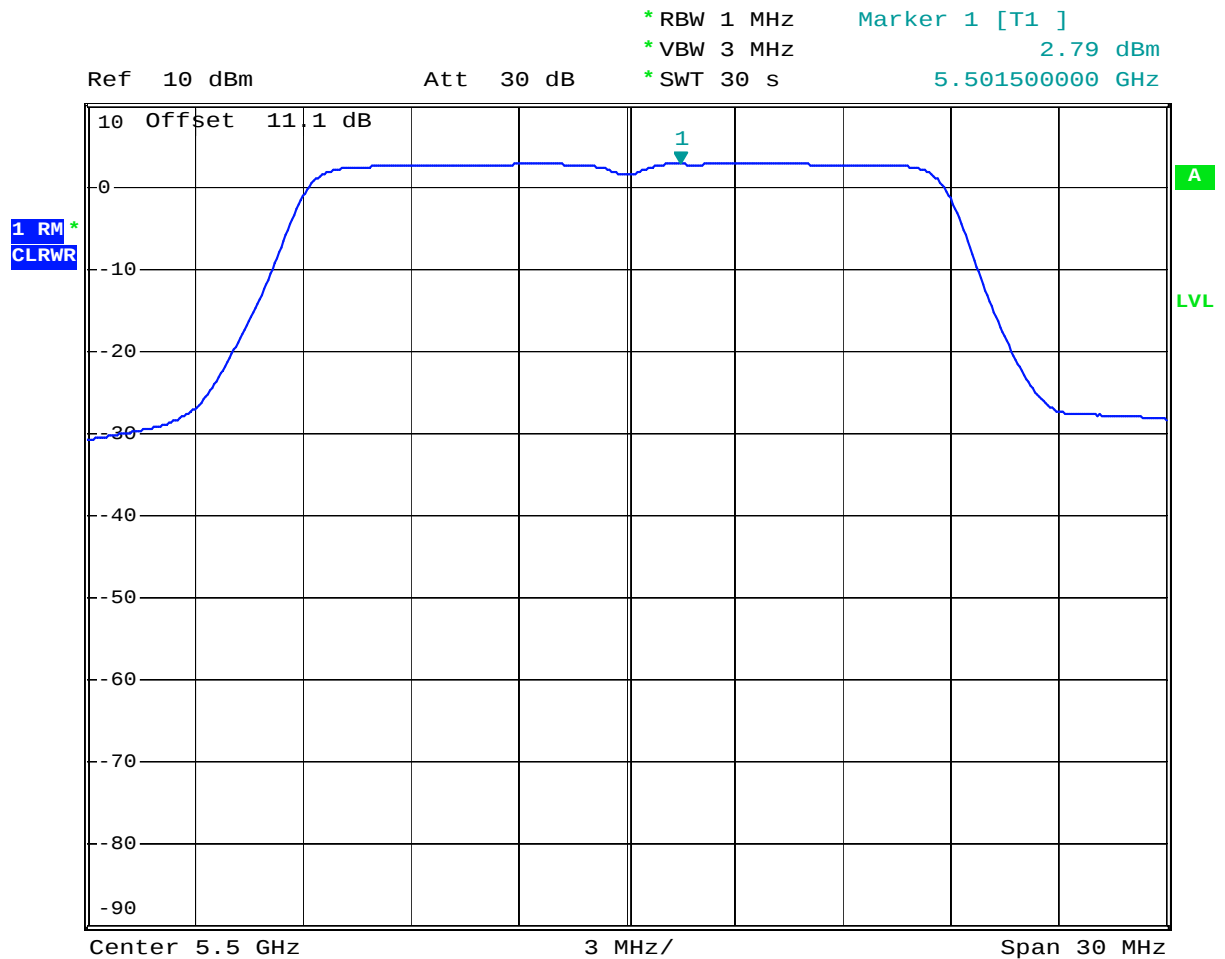

Date: 7.DEC.2015 15:01:57

Plot 3.5


H802.11n 20MHz, 5580MHz

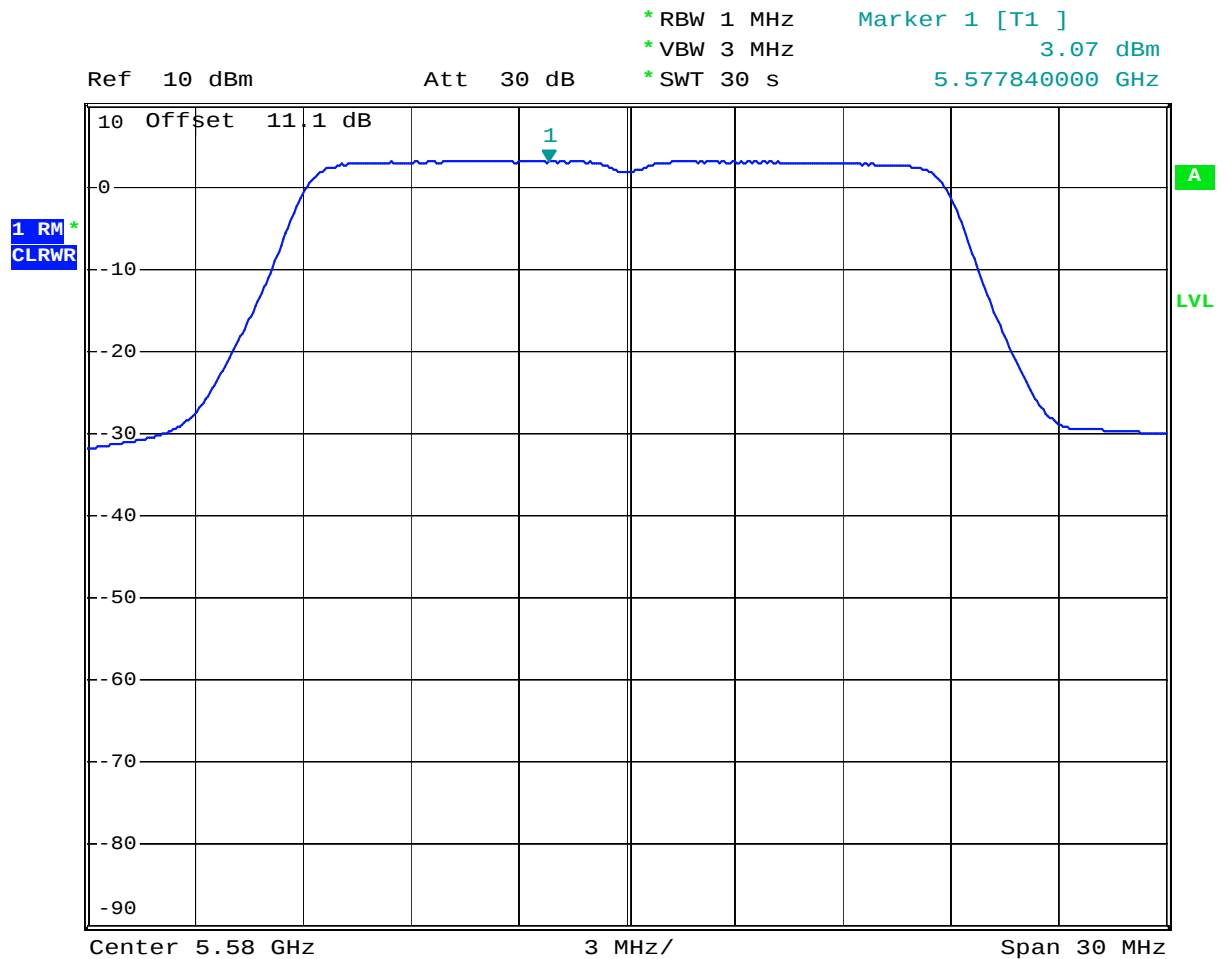

Date: 7.DEC.2015 15:03:25

Plot 3. 6


802.11n 20MHz, 5700MHz

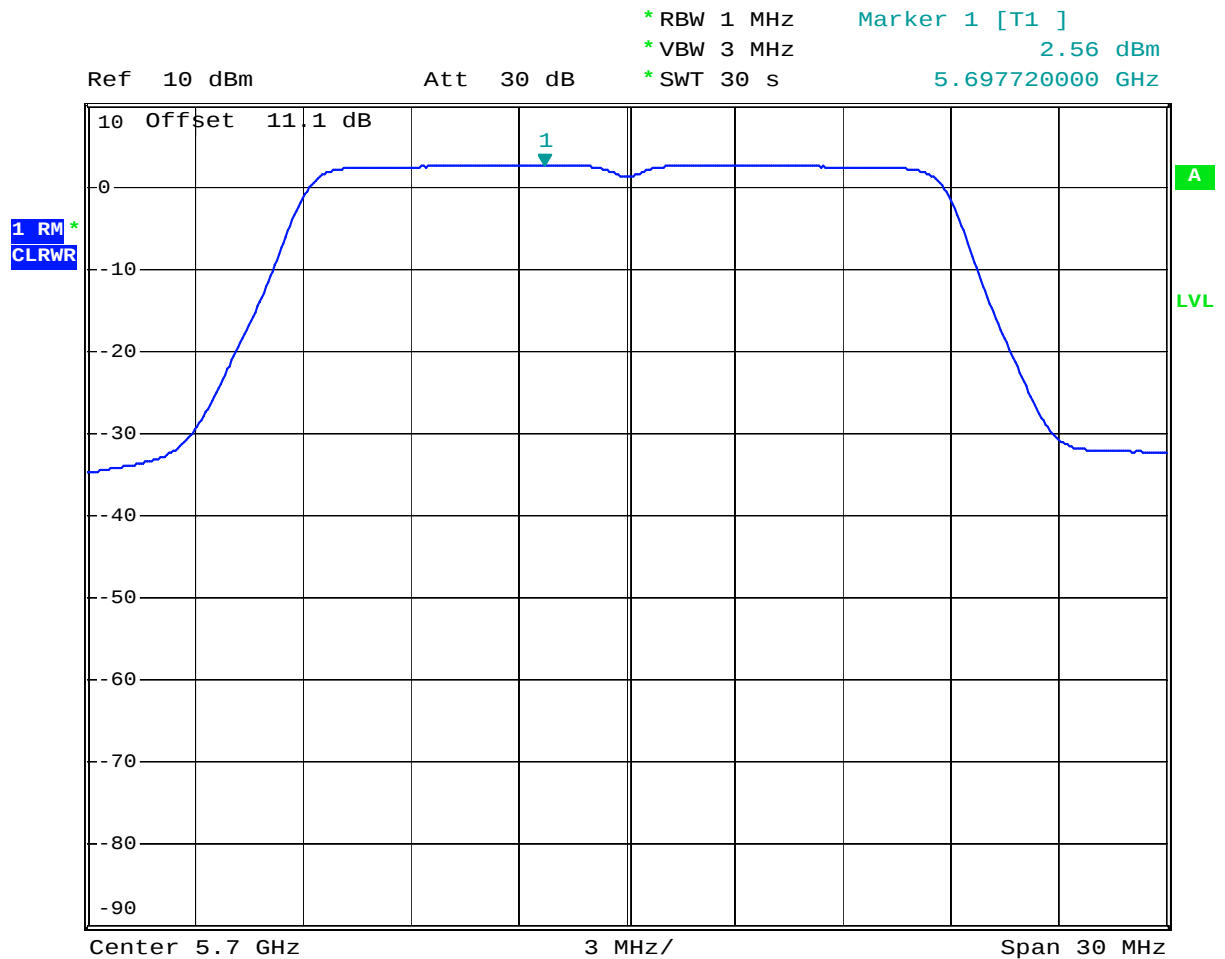

Date: 7.DEC.2015 15:05:02

Plot 3.7


802.11n 40MHz, 5510MHz

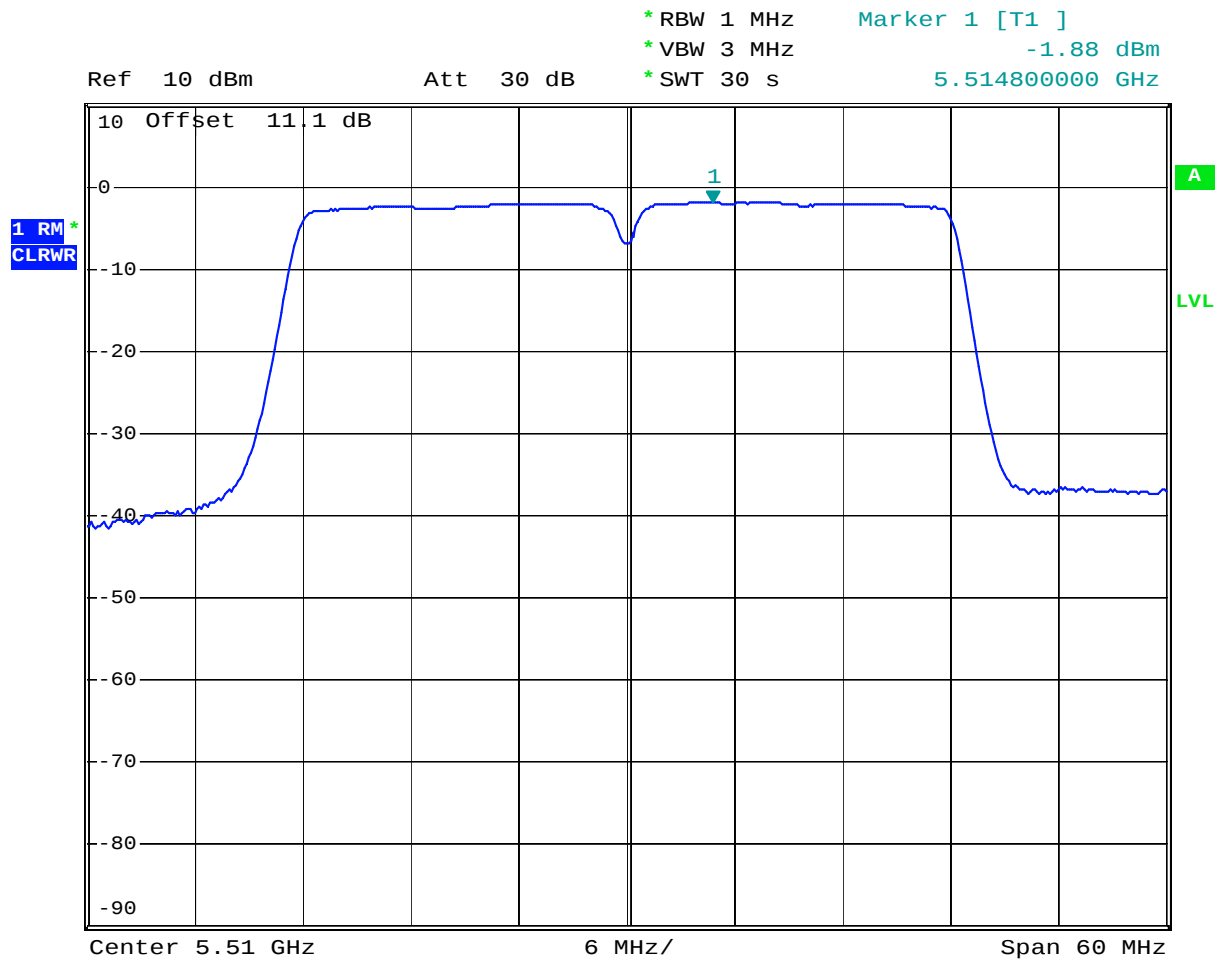

Date: 7.DEC.2015 14:00:35

Plot 3.8


802.11n 40MHz, 5550MHz

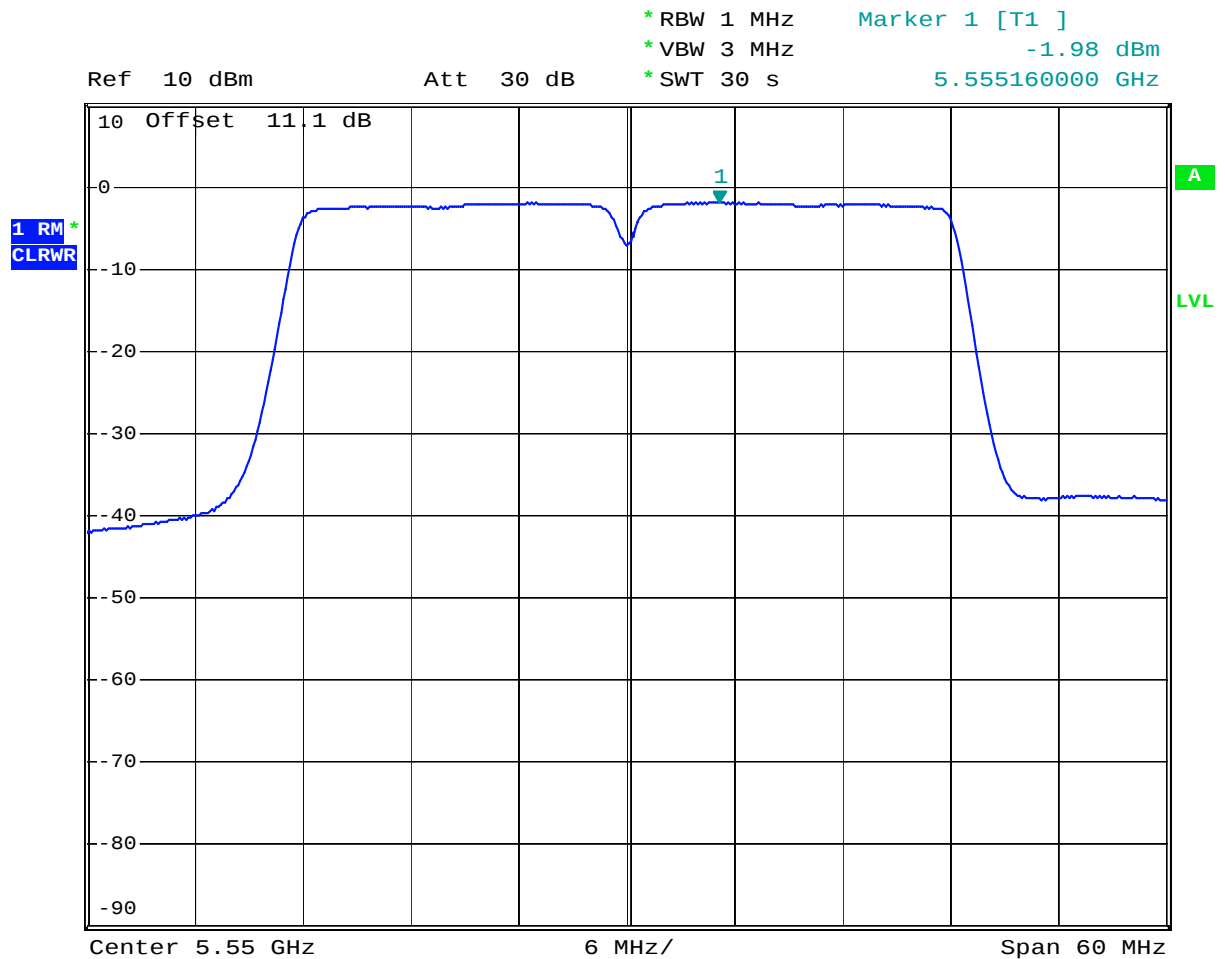

Date: 7.DEC.2015 14:03:23

Plot 3.9


802.11n 40MHz, 5670MHz

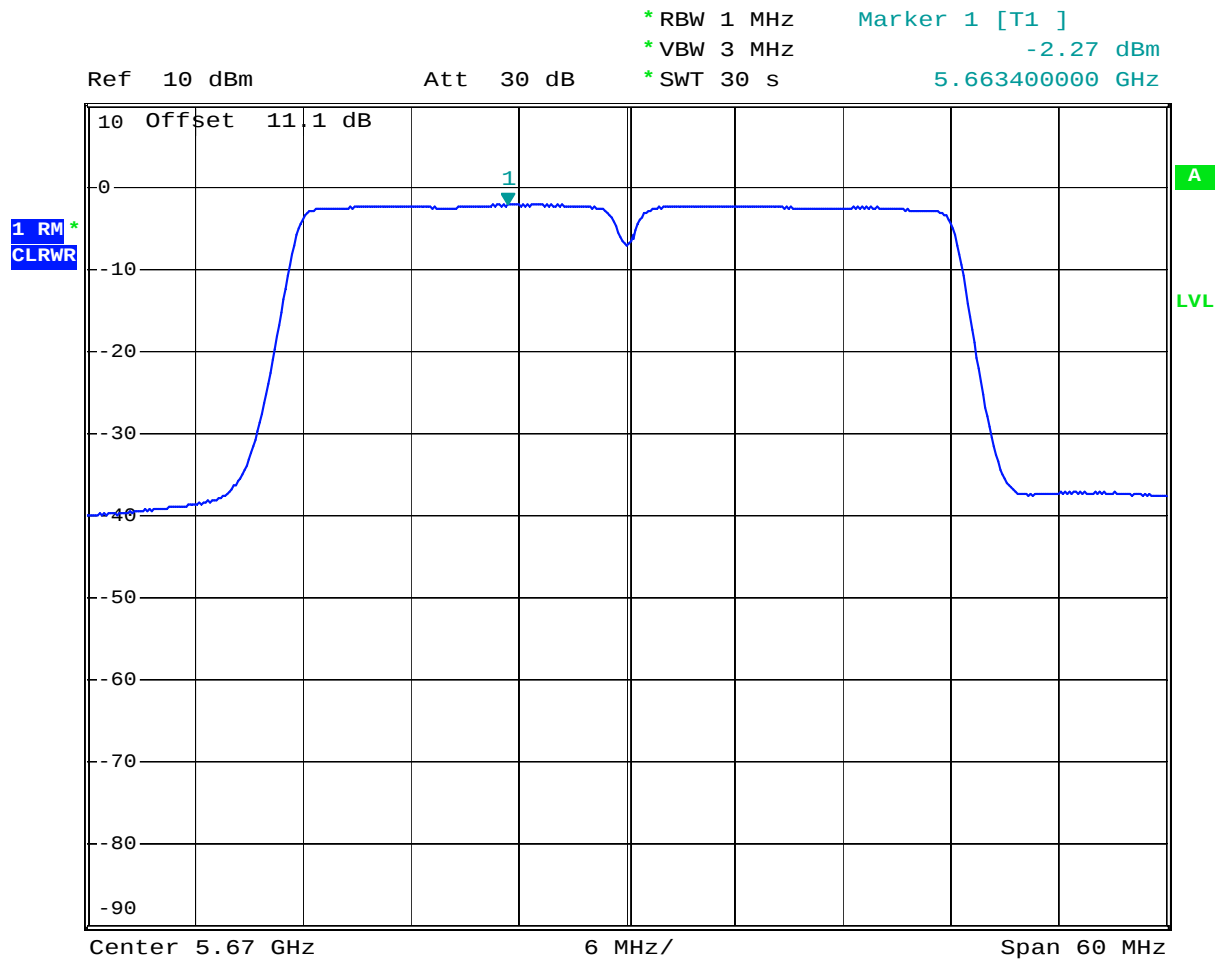

Date: 7.DEC.2015 14:07:50

Plot 3. 10

H802.11ac 80MHz, 5530MHz

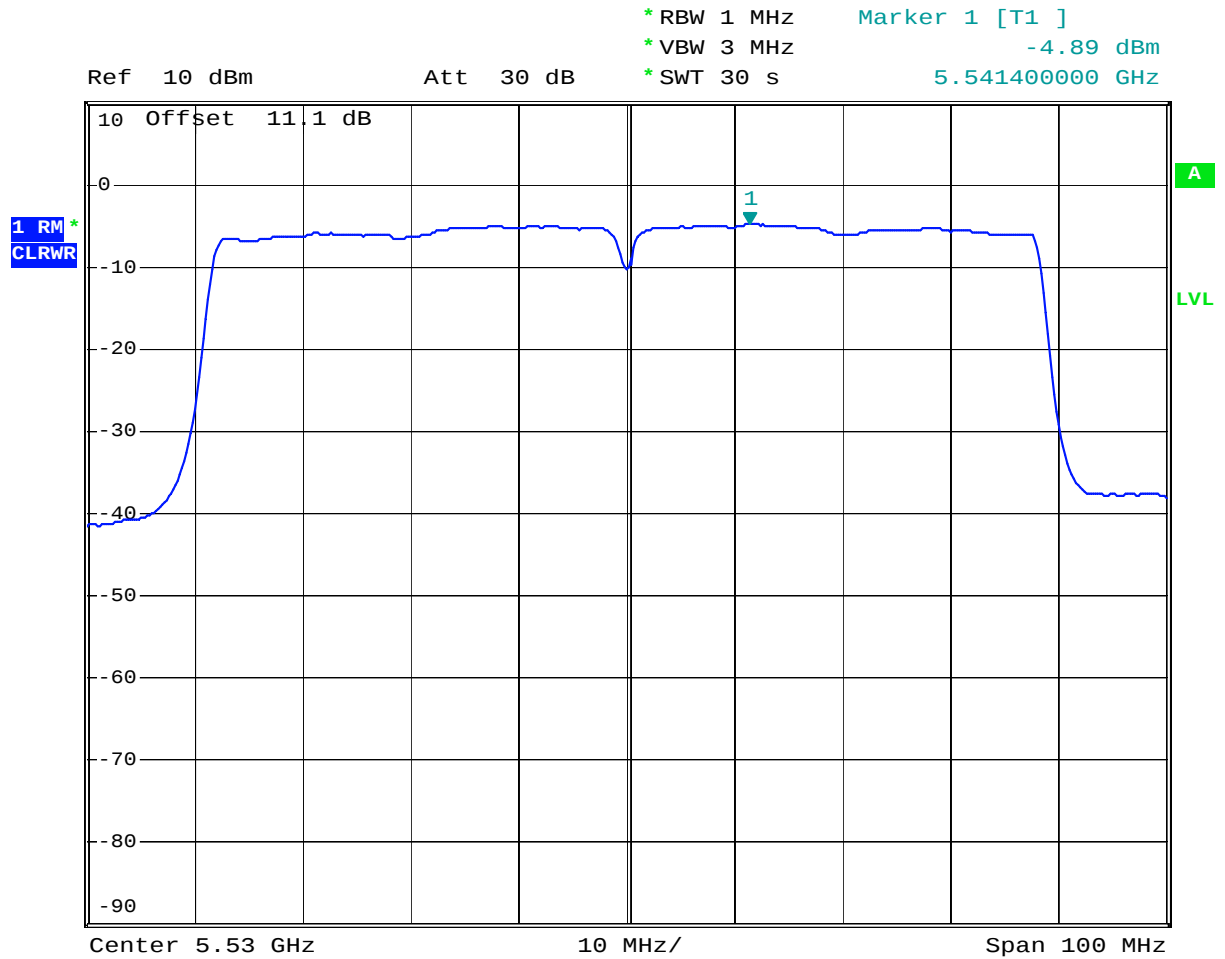

Date: 7.DEC.2015 15:30:33



4.4 Frequency stability FCC 15.407(g)

4.4.1 Requirement

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

4.4.2 Procedure

The EUT was placed in a temperature chamber and setup to transmit. Procedures for frequency stability in ANSIC63.10:2013 section 6.8 was utilized.

The carrier frequency was measured with the spectrum analyzer with resolution bandwidth of 1 kHz. The temperature was varied from 0⁰C to 50⁰C, as stated in the user manual.

The radio module in this report is powered by 5.0VDC which was varied to 85% and 115% for testing. Testing was performed at a temperature of 20⁰ C.

After the temperature stabilized for approximately 20 minutes, the transmitting frequency was measured.

Tested By:	Anderson Soungpanya
Test Date:	December 29, 2015

4.4.3 Result

Temperature, °C	Frequency at nominal voltage, (GHz)	Maximum deviation from frequency at 20°C, ppm
Nominal Frequency: 5500 MHz		
50	5500.009757	1.183
40	5500.009644	1.162
30	5500.006582	0.605
20	5500.003253	0.000
10	5500.002321	0.169
0	5500.002560	0.126
Voltage at 20°C	Frequency at nominal voltage, (GHz)	Maximum deviation from frequency at 20°C, ppm
5V – 15%	5500.005032	0.323
5V + 15%	5500.005021	0.321

Temperature, °C	Frequency at nominal voltage, (GHz)	Maximum deviation from frequency at 20°C, ppm
Nominal Frequency: 5700 MHz		
50	5700.009991	1.097
40	5700.009418	0.996
30	5700.007420	0.646
20	5700.003740	0.000
10	5700.002941	0.140
0	5700.002148	0.279
Voltage at 20°C	Frequency at nominal voltage, (GHz)	Maximum deviation from frequency at 20°C, ppm
5V – 15%	5700.004571	0.146
5V + 15%	5700.004529	0.138

4.5 Transmitter Radiated Emissions FCC Rule 15.407(b) (1-8) 15.209, 15.205

4.5.1 Requirement

(b) Undesirable emission limits. Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

Emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

Note: This corresponds to the field strength level of 68.3 dB(μ V/m) at 3 m distance when measure with 1 MHz resolution bandwidth.



4.5.2 Procedure

Radiated emission measurements were performed from 30 MHz to 40 GHz according to the procedure described in ANSI C64.10. Spectrum Analyzer Resolution Bandwidth is 100 kHz or greater for frequencies 30 MHz to 1000 MHz, 1 MHz for frequencies above 1000 MHz. Above 1000 MHz Peak and Average measurements were performed.

The EUT is placed on a plastic turntable that is 80 cm in height for below 1000MHz and 1.5m in height for above 1GHz. If the EUT attaches to peripherals, they are connected and operational (as typical as possible). During testing, all cables were manipulated to produce worst-case emissions. The signal is maximized through rotation. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters.

Radiated emissions are taken at 3 meters for frequencies above 1 GHz and at 10 meters for frequencies below 1 GHz.

Measurements made from 30 MHz to 40 GHz were measured with 50 ohm terminator on the output of the EUT RF port. A preamp was used from 30MHz to 40GHz.

All measurements were made with a Peak Detector and compared to QP limits for 30MHz – 1GHz and Average limits for 1GHz – 40 GHz.

Data is included of the worst-case configuration (the configuration which resulted in the highest emission levels).



4.5.3 Field Strength Calculation

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$FS = RA + AF + CF - AG$; if measurement is performed at a distance other than specified in the rule, a Distance Correction Factor (DCF) shall be added.

Where FS = Field Strength in $dB(\mu V/m)$

RA = Receiver Amplitude (including preamplifier) in $dB(\mu V)$; AF = Antenna Factor in $dB(1/m)$

CF = Cable Attenuation Factor in dB ; AG = Amplifier Gain in dB

Assume a receiver reading of $52.0\text{ dB}(\mu V)$ is obtained. The antennas factor of $7.4\text{ dB}(1/m)$ and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving field strength of $32\text{ dB}(\mu V/m)$. This value in $dB(\mu V/m)$ was converted to its corresponding level in $\mu V/m$.

$RA = 52.0\text{ dB}(\mu V)$

$AF = 7.4\text{ dB}(1/m)$

$CF = 1.6\text{ dB}$

$AG = 29.0\text{ dB}$

$FS = 52.0 + 7.4 + 1.6 - 29.0 = 32\text{ dB}(\mu V/m)$.

Level in $\mu V/m$ = Common Antilogarithm $[(32\text{ dB}\mu V/m)/20] = 39.8\text{ }\mu V/m$.



4.5.4 Antenna-port conducted measurements

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

4.5.6 General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified for determining quasi-peak, peak, and average conducted output power, respectively.
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (*e.g.*, Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:
$$E = \text{EIRP} - 20\log D + 104.8$$
where:
E = electric field strength in dB μ V/m,
EIRP = equivalent isotropic radiated power in dBm
D = specified measurement distance in meters.
- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test

4.5.7 Test Results

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance where emissions are within 3dB of the limit.



All conducted antenna port plots are corrected with the consideration of a 3.4 dBi Antenna Gain.

Radiated emission measurements were performed up to 40GHz. No Emissions were identified when scanned from 18-40 GHz.

15.209/15.205 Restricted Band Emissions at Antenna Port



Tested By:	Anderson Soungpanya
Test Date:	December 1-3, 2015

Out-of-Band Spurious Emissions at the Band Edge - 802.11a, 5500 MHz

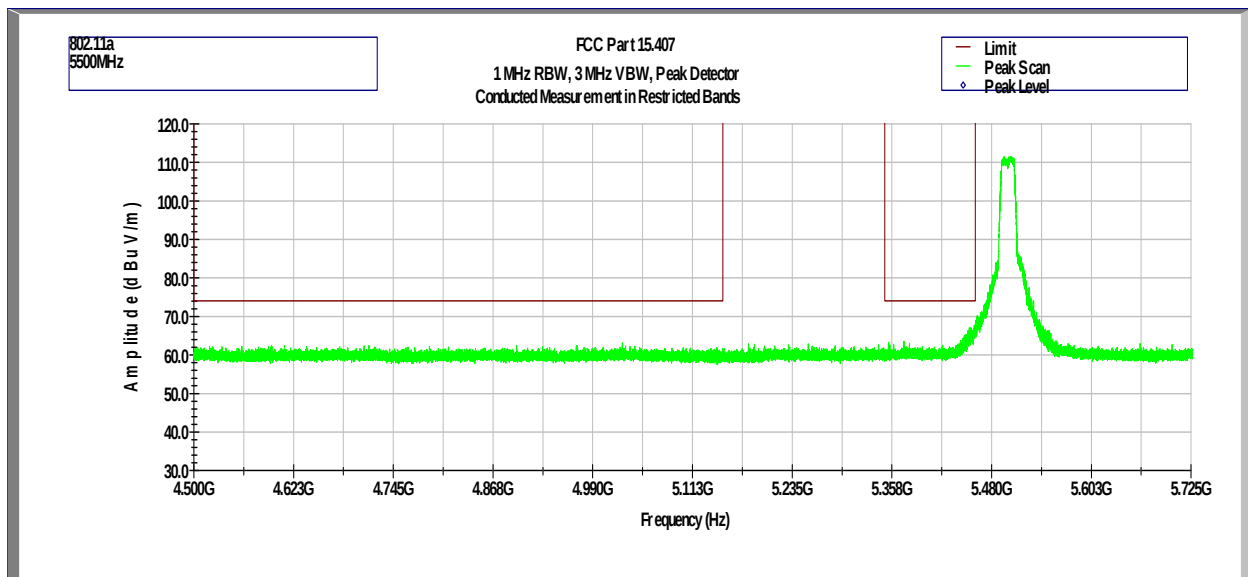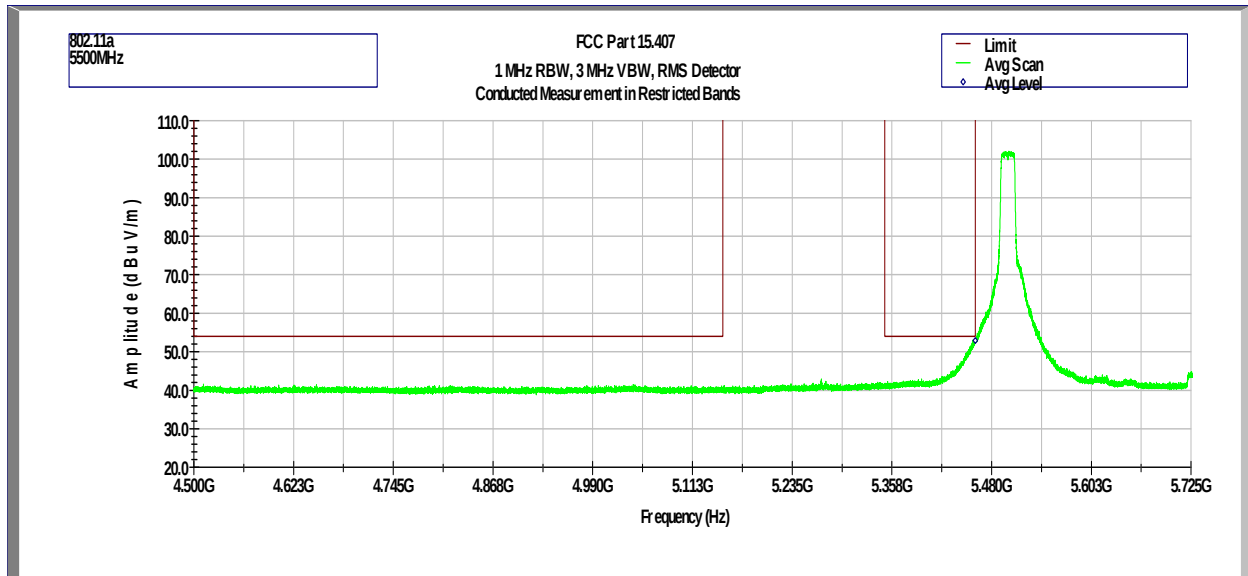



Frequency	Corrected Amplitude	Limit	Margin	Detector	Results
GHz	dBuV/m	dBuV/m	dB		
5.460	52.9	54	-1.1	Avg	Pass

Out-of-Band Spurious Emissions at the Band Edge - 802.11n 20MHz, 5500 MHz

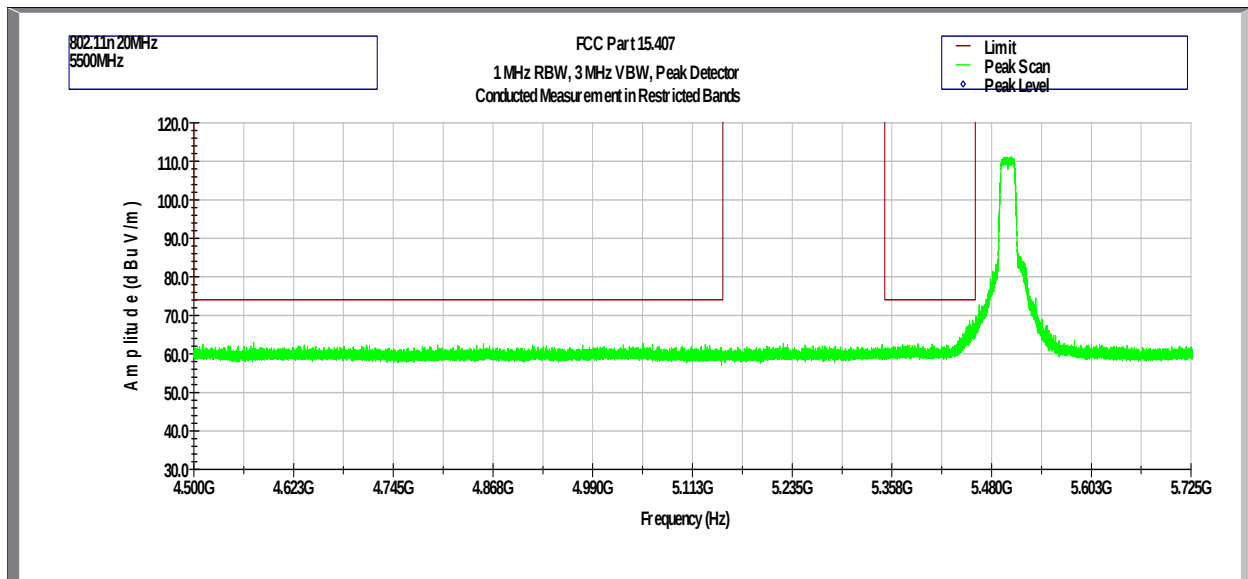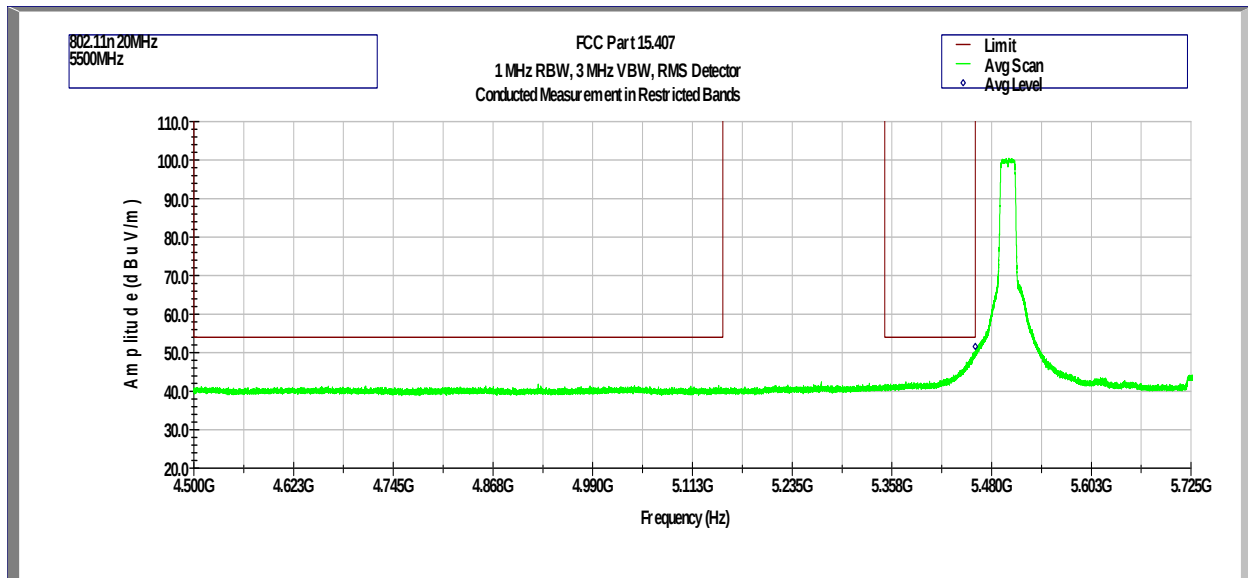



Frequency	Corrected Amplitude	Limit	Margin	Detector	Results
GHz	dBuV/m	dBuV/m	dB		
5.460	51.6	54	-2.4	Avg	Pass

Out-of-Band Spurious Emissions at the Band Edge - 802.11n 40MHz, 5510 MHz

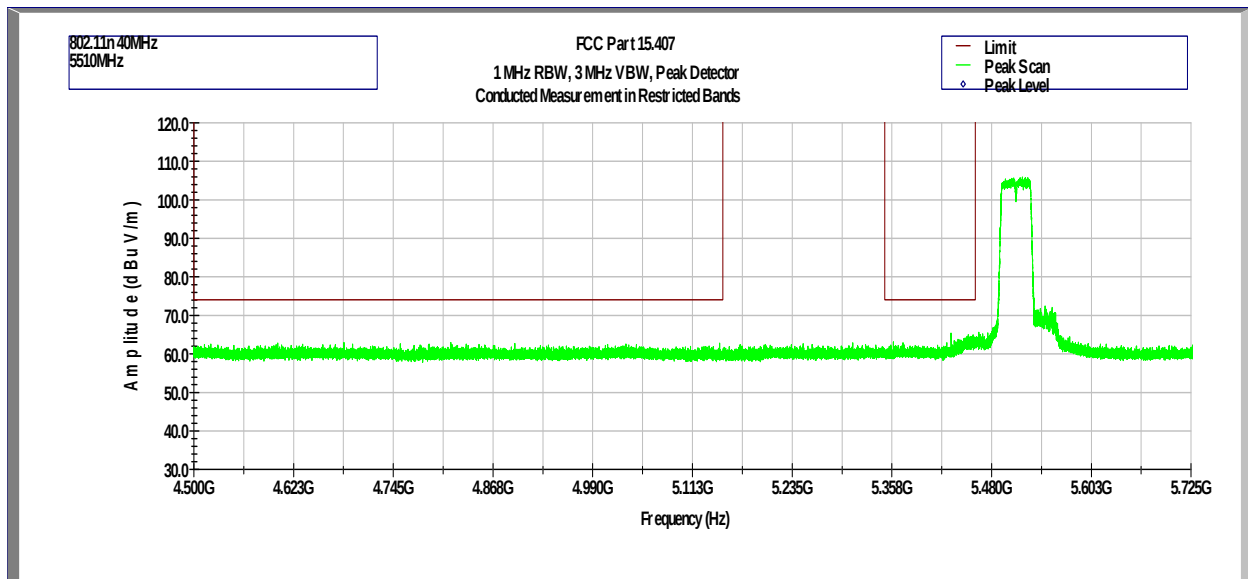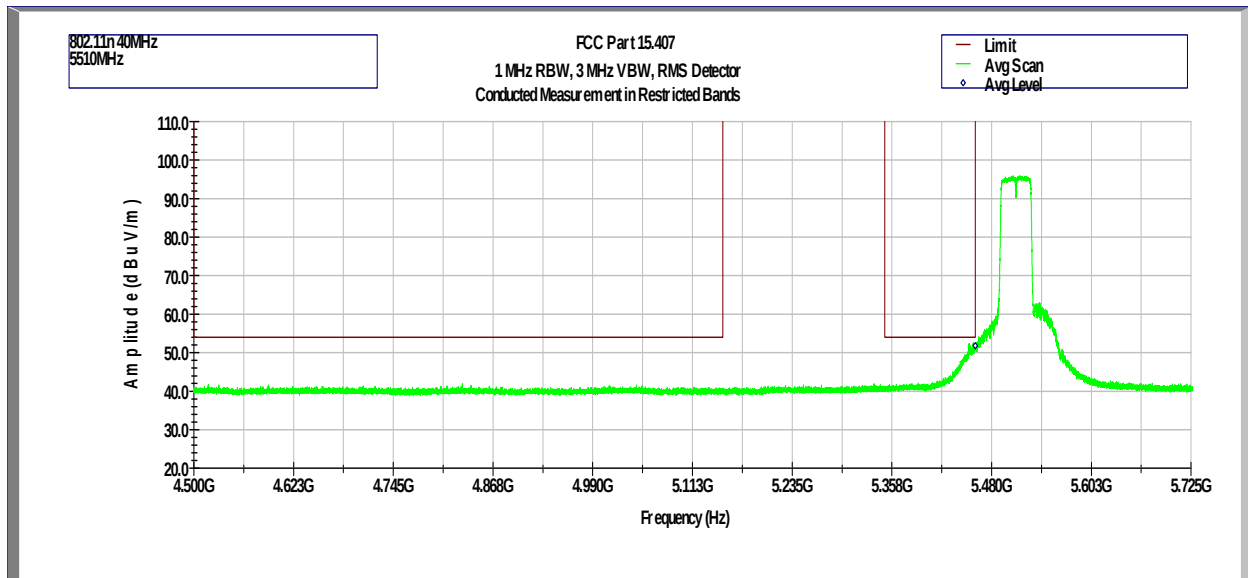

Frequency	Corrected Amplitude	Limit	Margin	Detector	Results
GHz	dBμV/m	dBμV/m	dB		
5.460	51.8	54	-2.2	Avg	Pass

Out-of-Band Spurious Emissions at the Band Edge - 802.11ac 80MHz, 5530 MHz

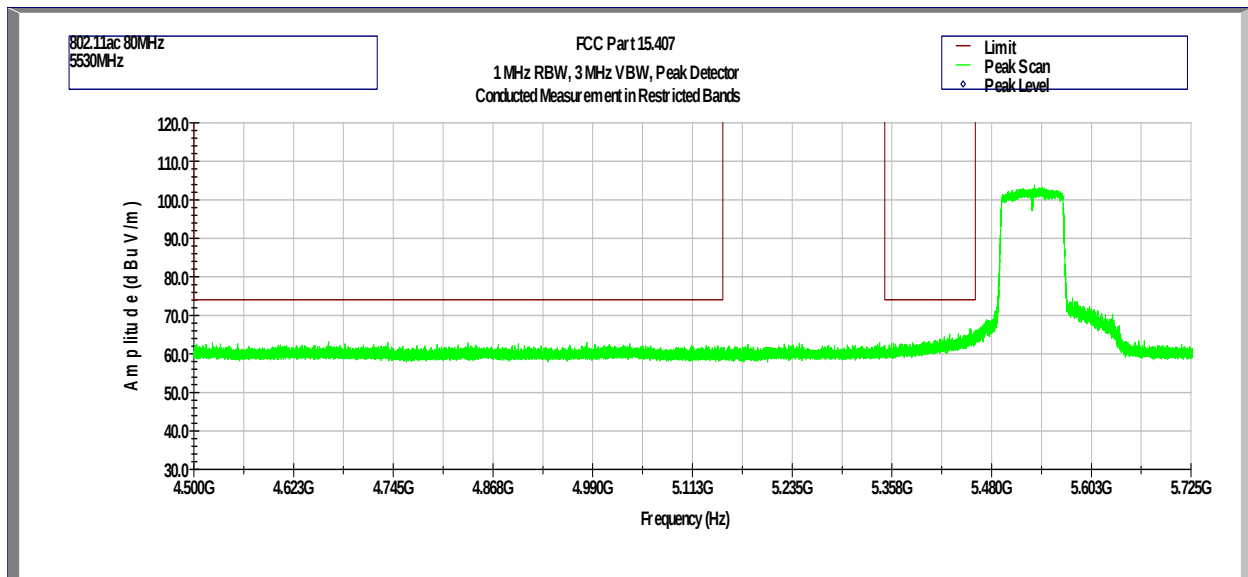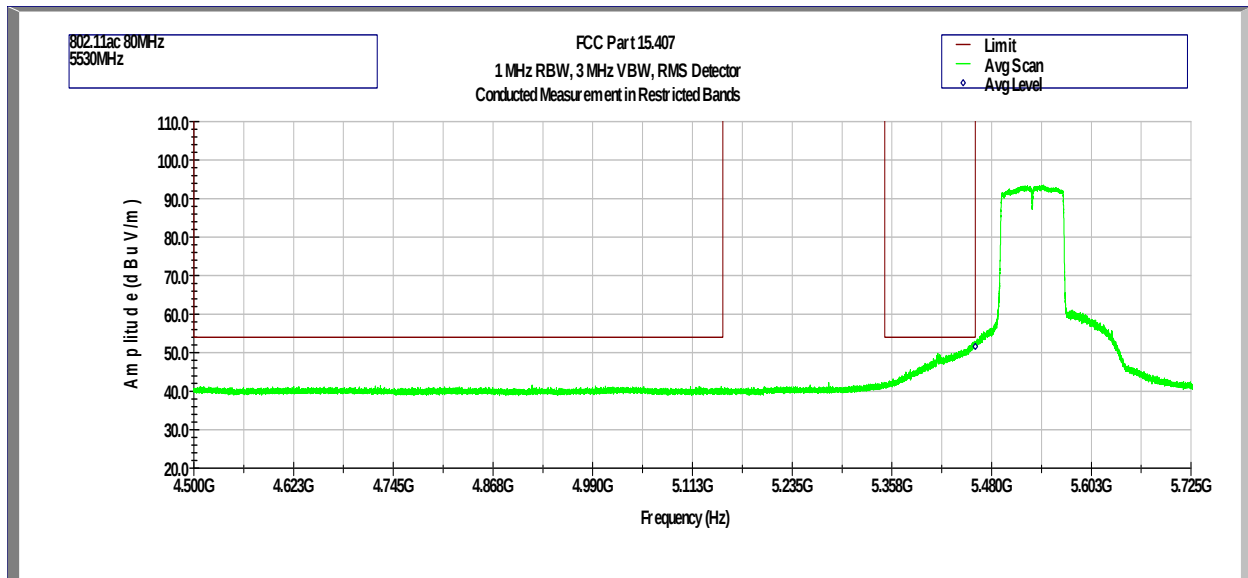


Frequency	Corrected Amplitude	Limit	Margin	Detector	Results
GHz	dBμV/m	dBμV/m	dB		
5.460	51.6	54	-2.4	Avg	Pass


Out-of-Band Conducted Spurious Emissions (at Antenna Port)

Tx @ 5500MHz 802.11a


Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz

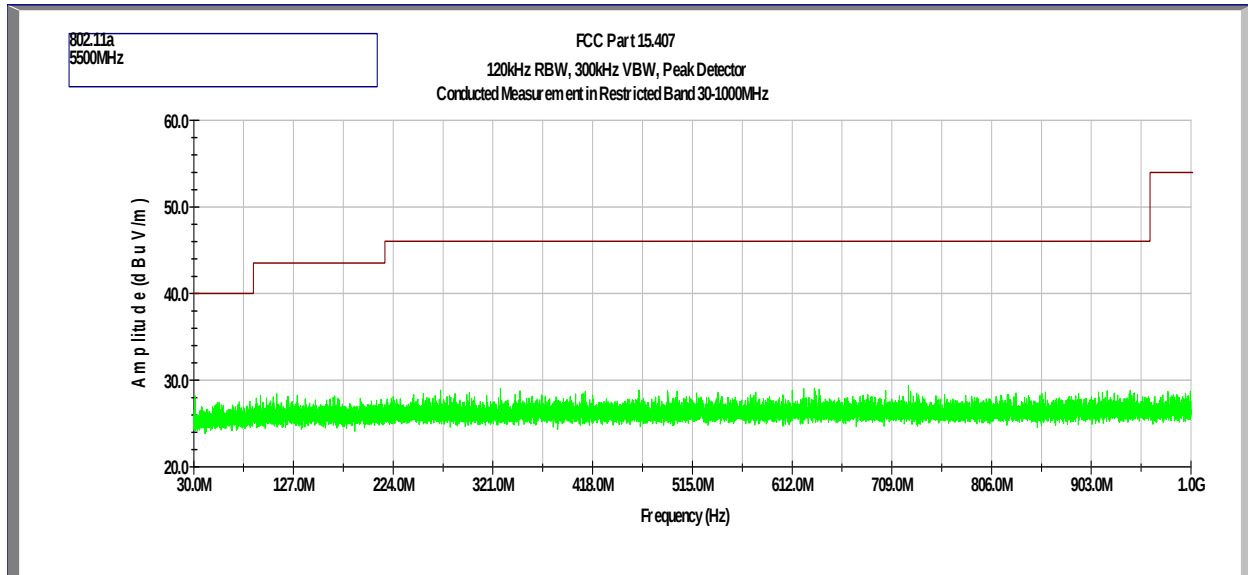


Out-of-Band Spurious Emissions at Antenna Port - 1 GHz to 40 GHz

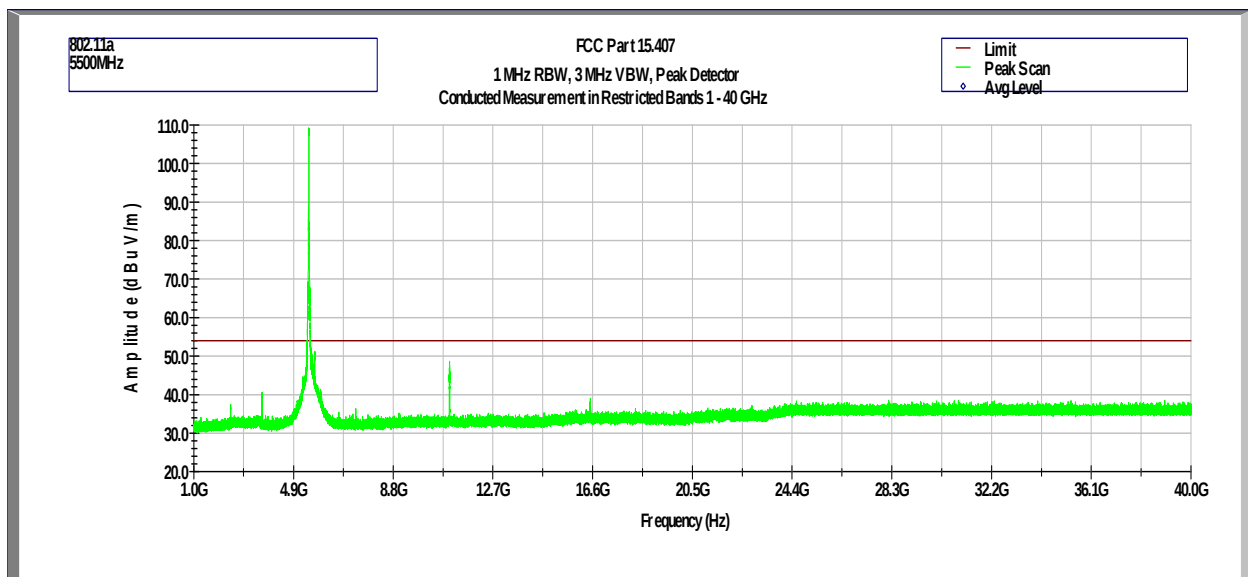


Tx @ 5580MHz 802.11a
Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz

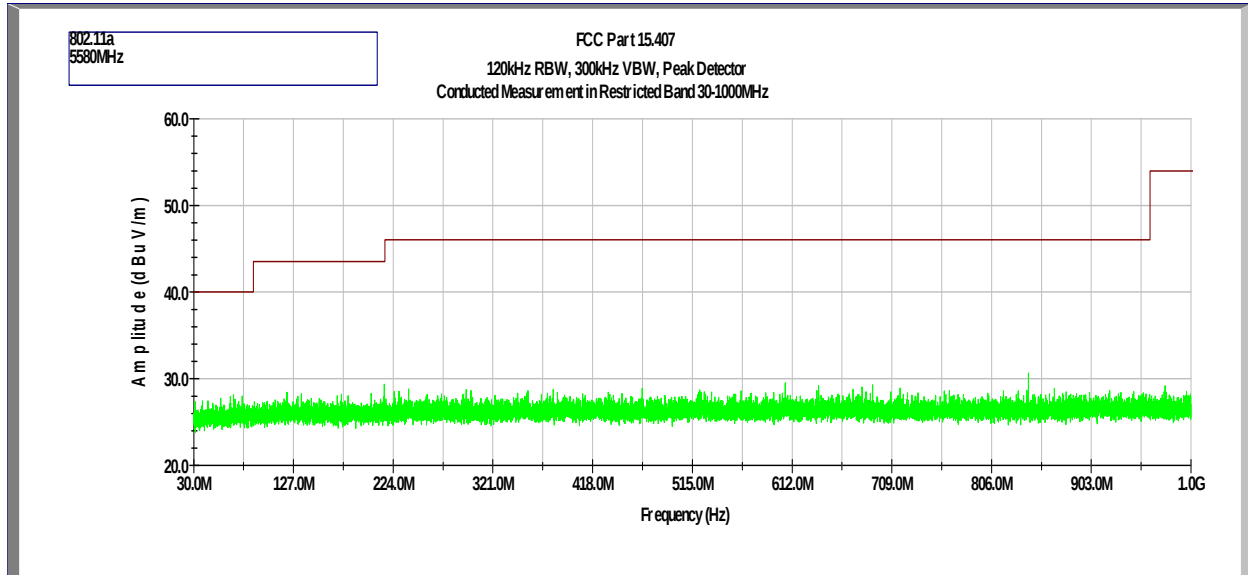


Out-of-Band Spurious Emissions at Antenna Port - 1 GHz to 40 GHz

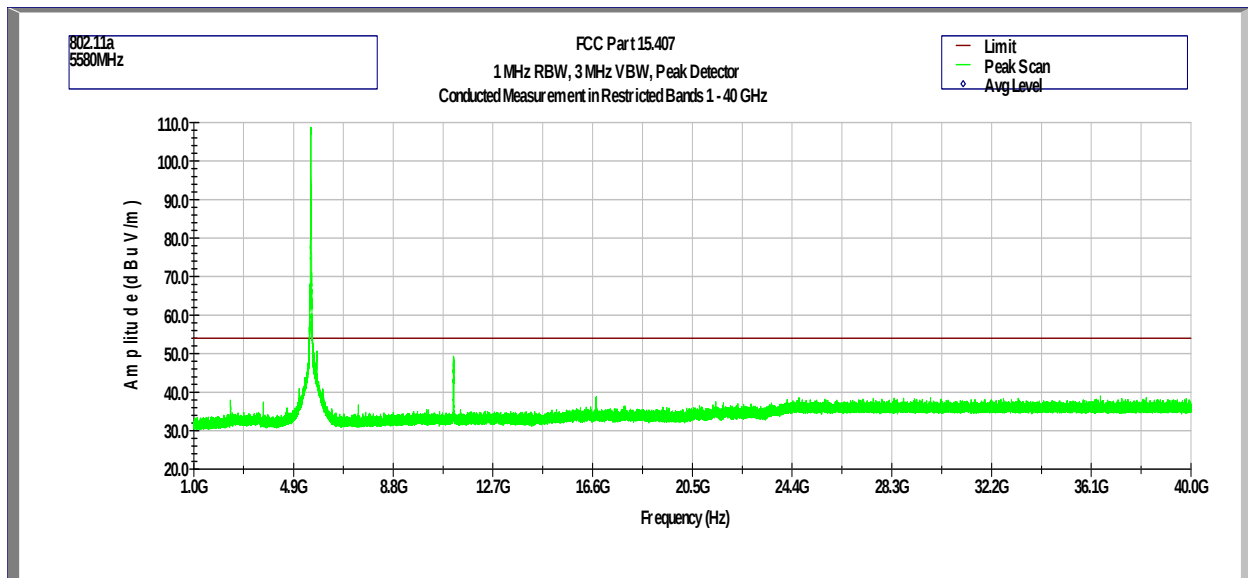


Tx @ 5700MHz 802.11a
Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz

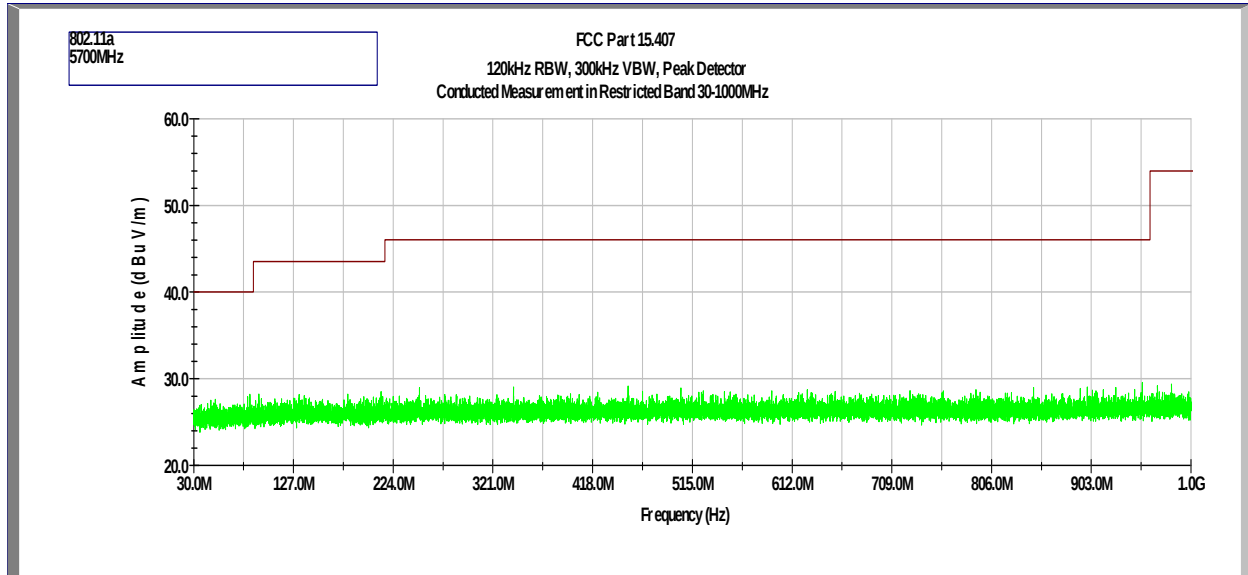


Out-of-Band Spurious Emissions at Antenna Port - 1 GHz to 40 GHz

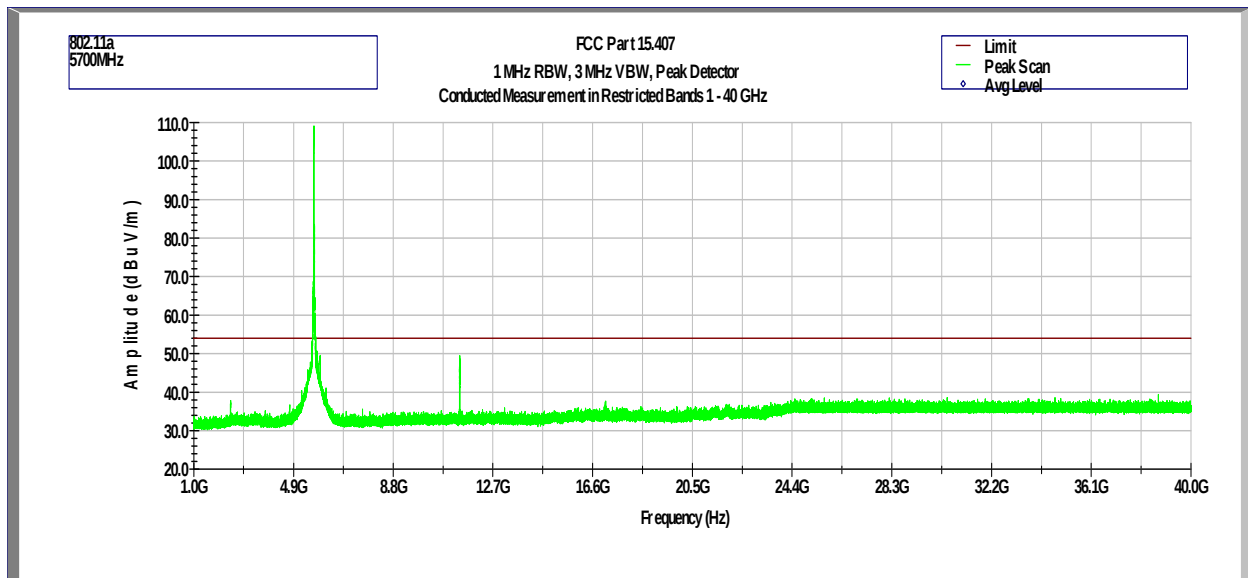


Tx @ 5500MHz 802.11n 20MHz
 Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz

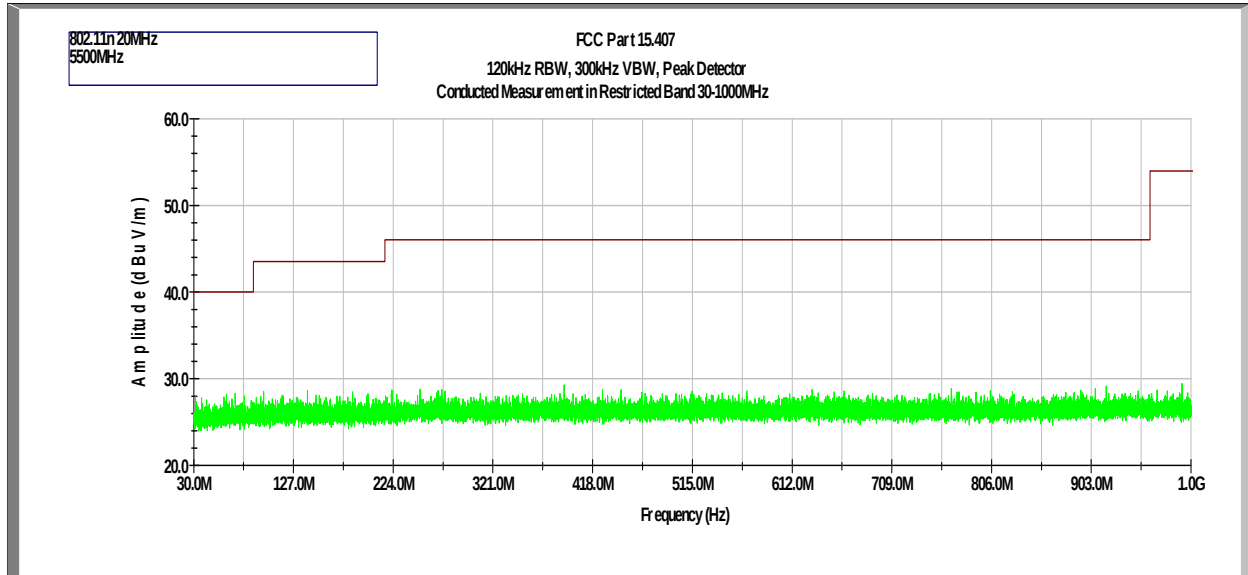


Out-of-Band Spurious Emissions at Antenna Port - 1 GHz to 40 GHz

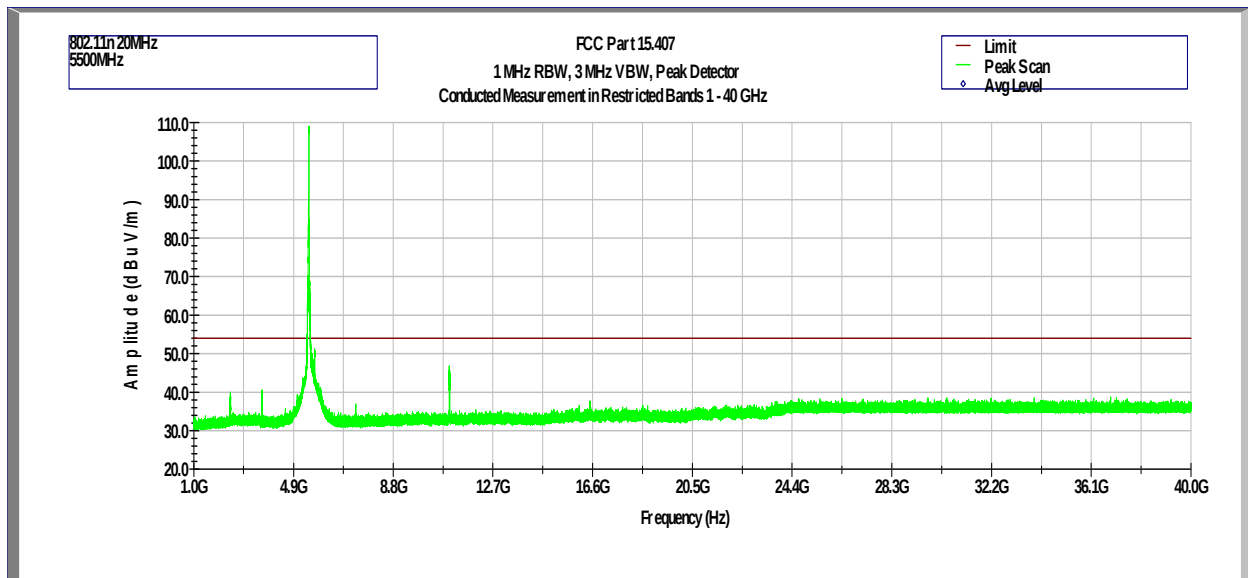


Tx @ 5580MHz 802.11n 20MHz
 Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz

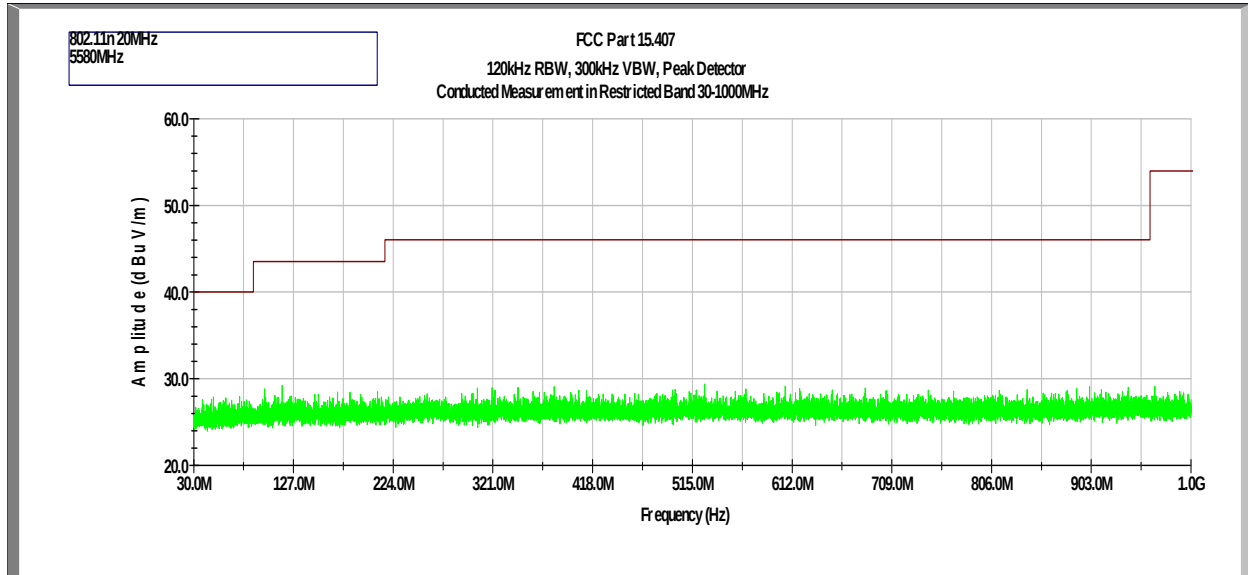


Out-of-Band Spurious Emissions at Antenna Port - 1 GHz to 40 GHz

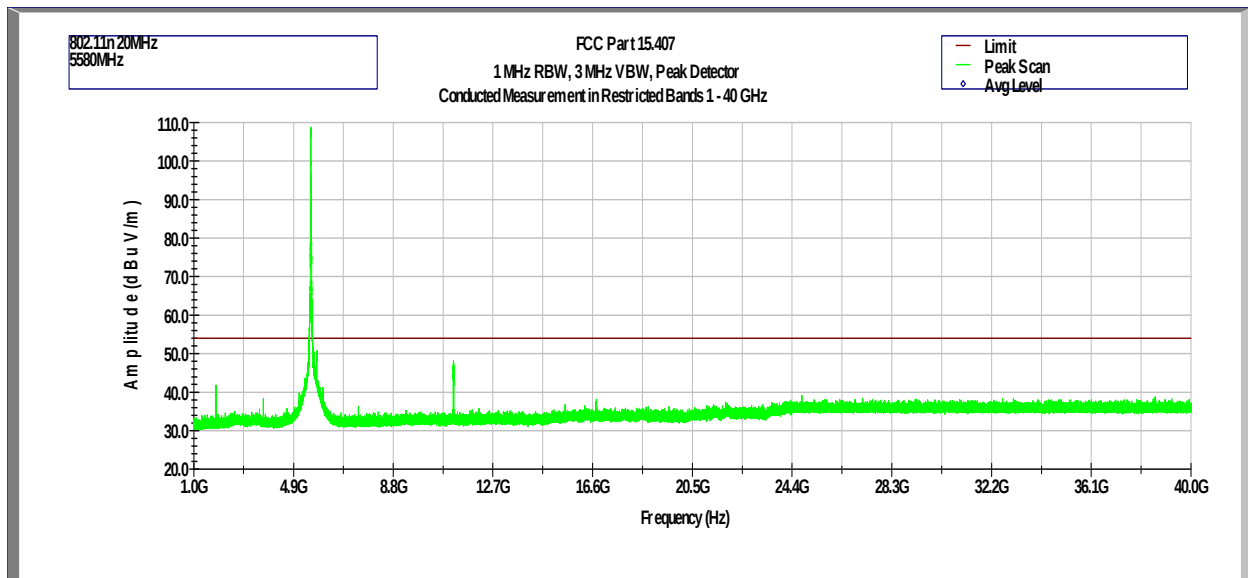


Tx @ 5700MHz 802.11n 20MHz
 Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz

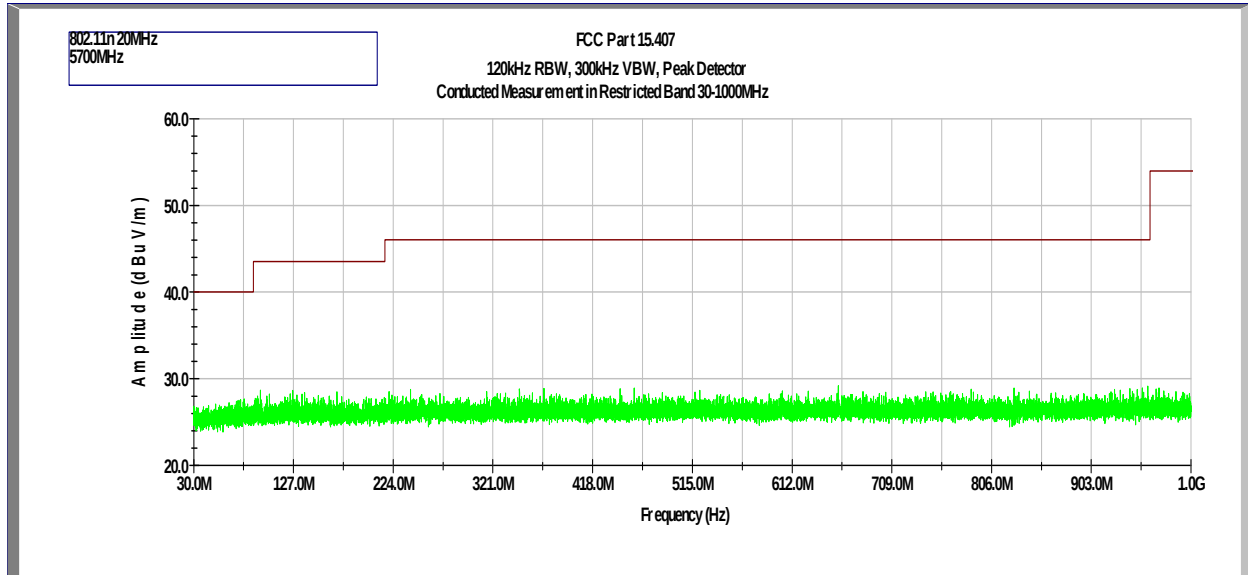


Out-of-Band Spurious Emissions at Antenna Port - 1 GHz to 40 GHz

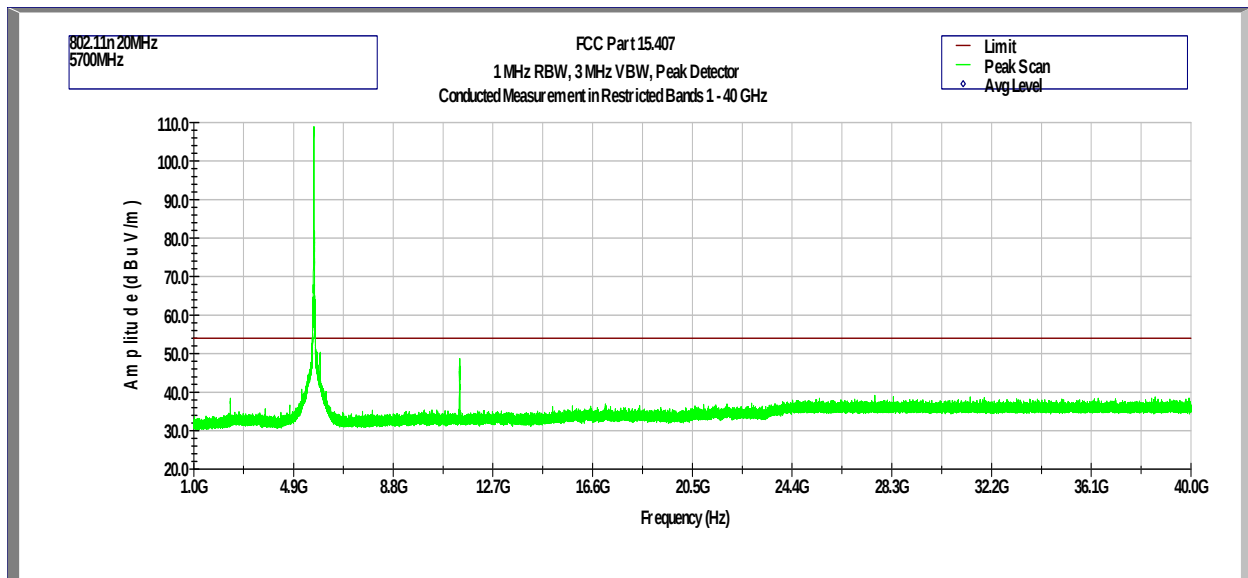


Tx @ 5510MHz 802.11n 40MHz
 Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz

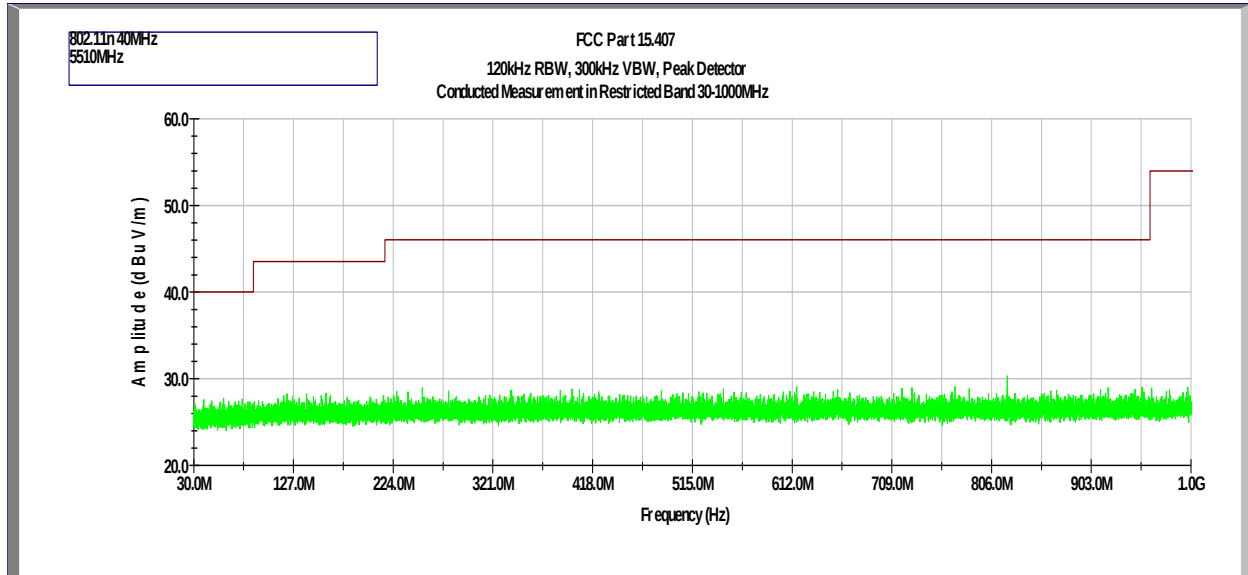


Out-of-Band Spurious Emissions at Antenna Port - 1 GHz to 40 GHz

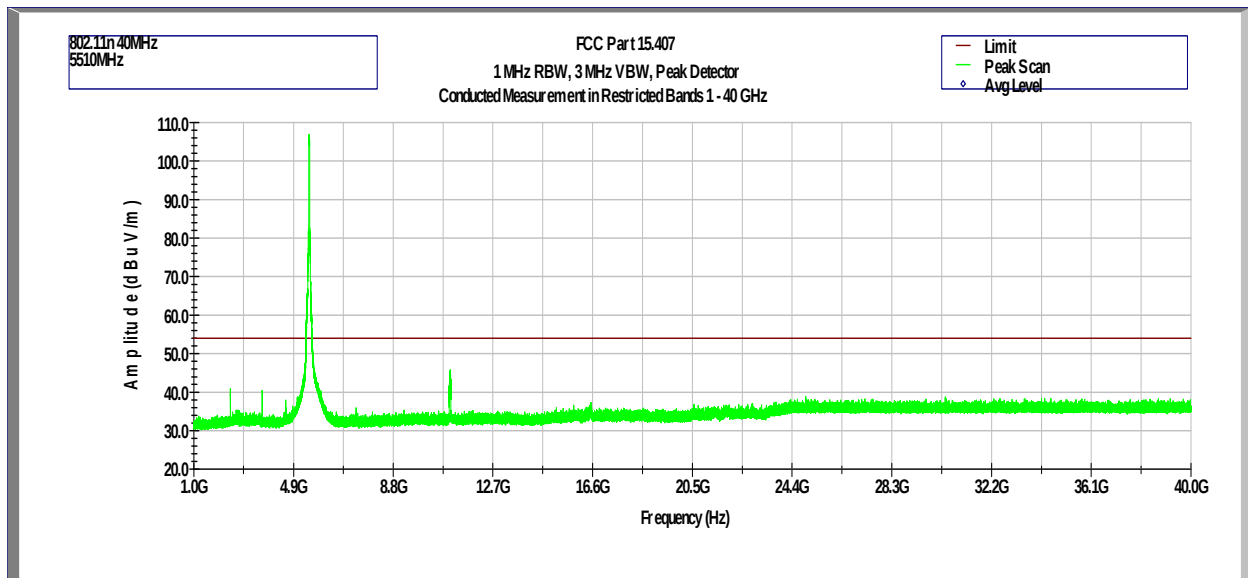


Tx @ 5550MHz 802.11n 40MHz
 Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz

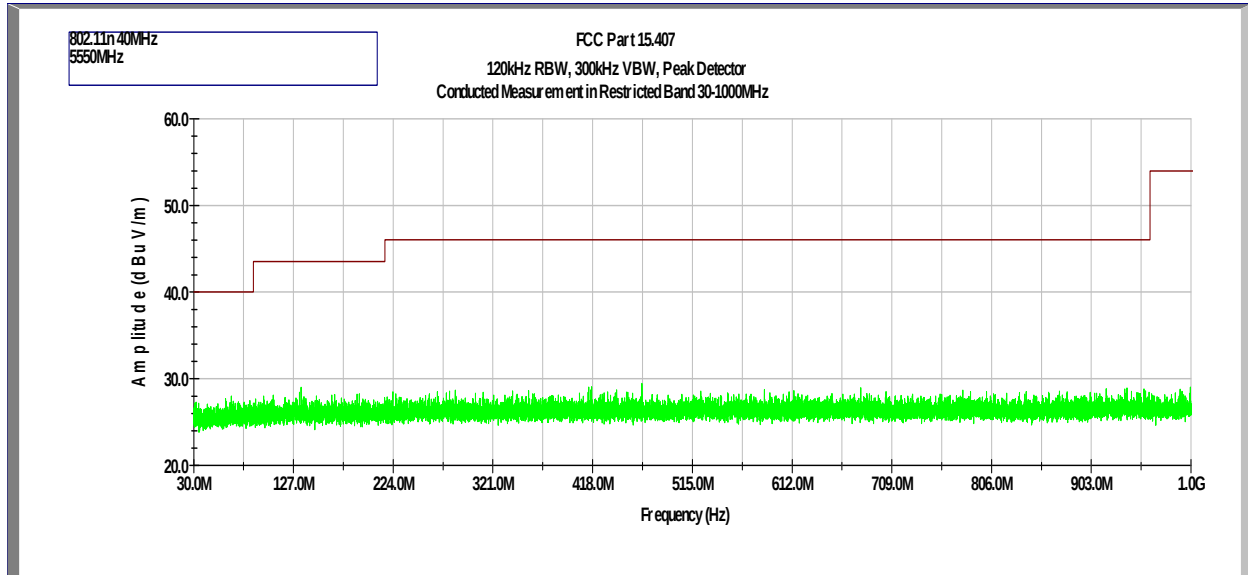


Out-of-Band Spurious Emissions at Antenna Port - 1 GHz to 40 GHz

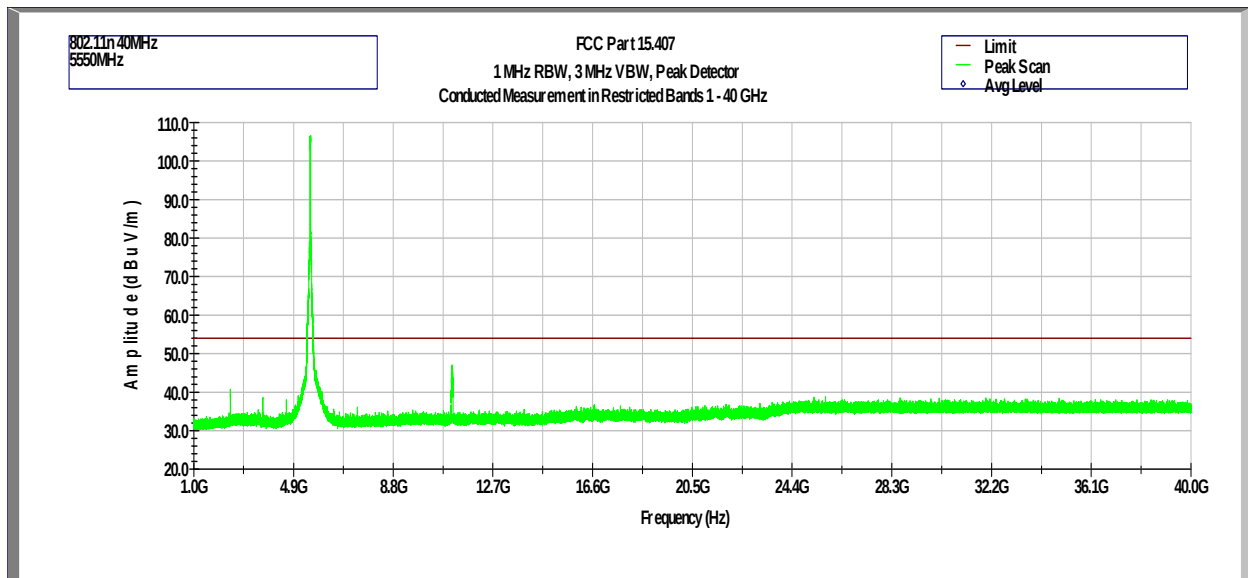


Tx @ 5670MHz 802.11n 40MHz
 Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz

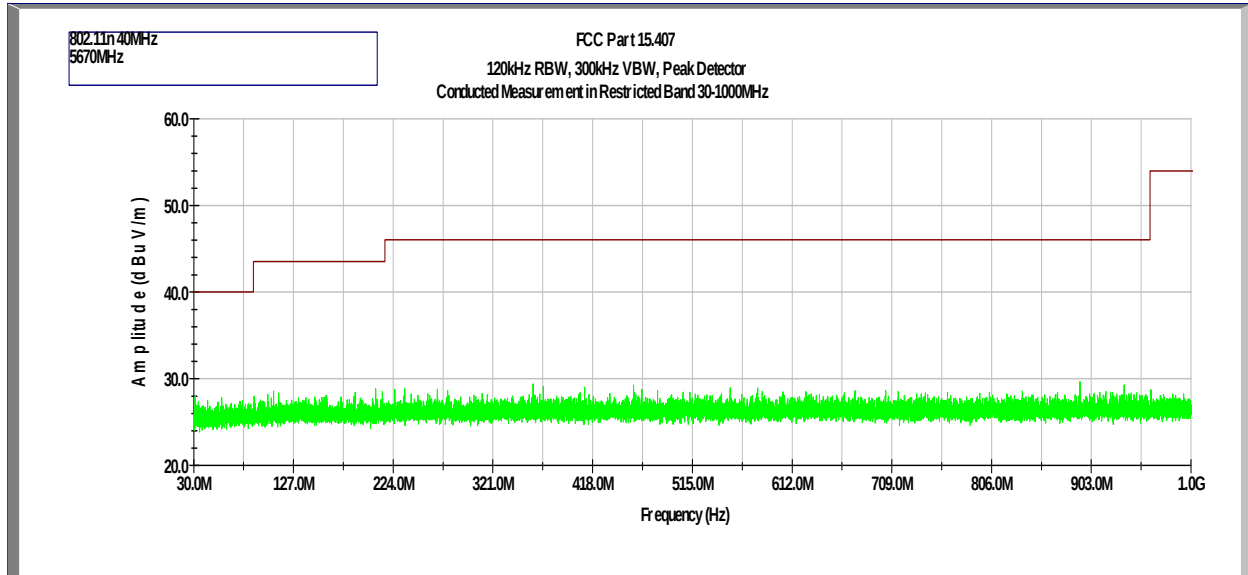


Out-of-Band Spurious Emissions at Antenna Port - 1 GHz to 40 GHz

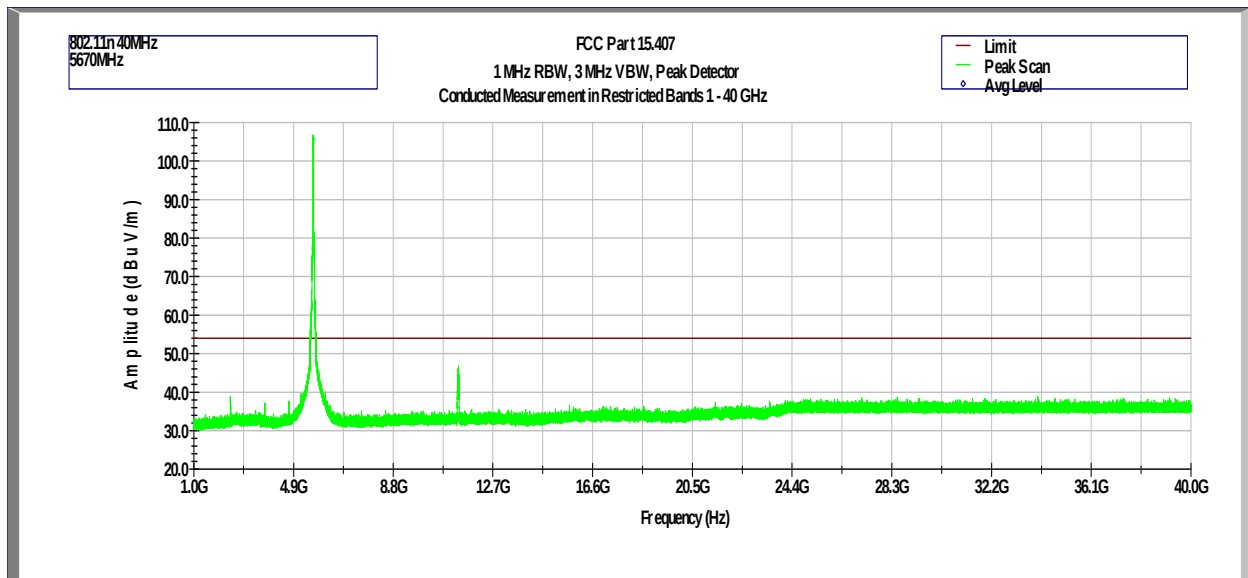

Tx @ 5530MHz 802.11ac 80MHz
 Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz

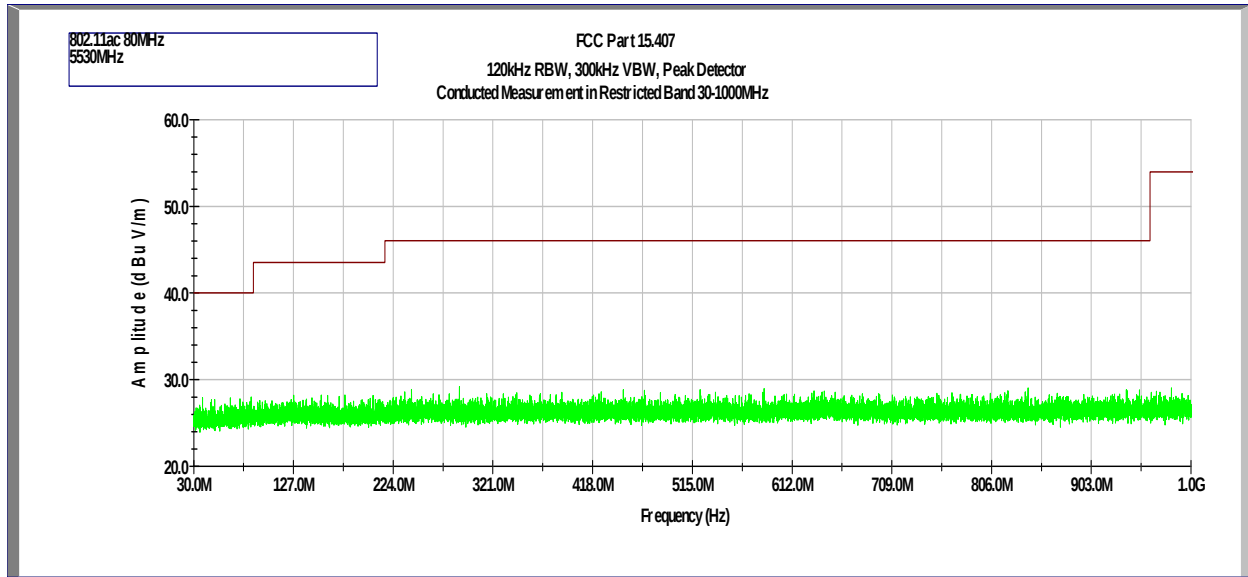

Out-of-Band Spurious Emissions at Antenna Port - 1 GHz to 40 GHz

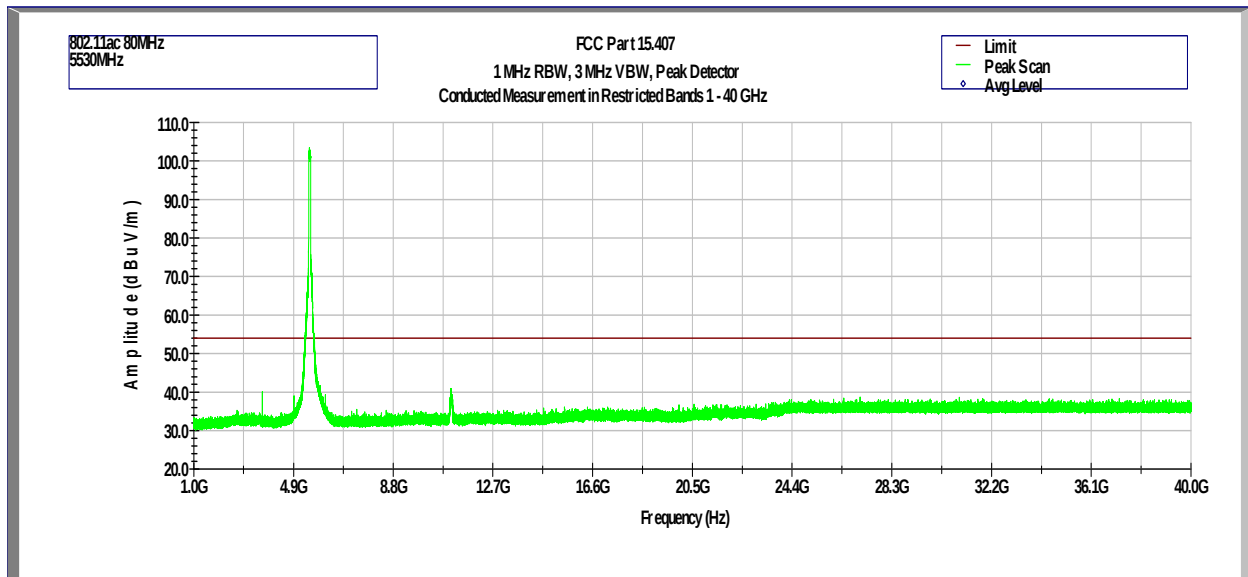

**Out-of-Band Radiated Spurious Emissions (Cabinet Radiation)**

Tested By:	Anderson Soungpanya
Test Date:	December 8-18, 2015

Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11a 5500MHz

Radiated Spurious Emissions 30 MHz - 1000 MHz (Horizontal)

Frequency	Peak FS	Limit@3m	Margin	RA	CF	AG	DCF	AF
MHz	dB(uV/m)	dB(uV/m)	dB	dB(uV)	dB	dB	dB	dB(1/m)
168.742	36.1	43.5	-7.4	47.0	1.4	32.0	10.5	9.3
170.003	36.2	43.5	-7.3	46.8	1.4	32.0	10.5	9.4
173.625	36.0	43.5	-7.5	46.8	1.4	32.0	10.5	9.3
192.022	36.0	43.5	-7.5	46.5	1.5	32.0	10.5	9.5
193.962	35.7	43.5	-7.8	46.2	1.5	32.0	10.5	9.5
216.014	39.8	46.0	-6.2	49.1	1.7	32.0	10.5	10.6
250.028	40.8	46.0	-5.2	48.5	1.9	32.0	10.5	11.8
300.016	37.2	46.0	-8.8	43.0	2.3	32.0	10.5	13.3
312.011	37.3	46.0	-8.7	42.9	2.3	32.0	10.5	13.6
323.263	36.9	46.0	-9.1	42.1	2.4	32.0	10.5	13.9
389.999	34.8	46.0	-11.2	38.3	2.5	32.0	10.5	15.5
420.005	36.5	46.0	-9.5	39.0	2.6	32.0	10.5	16.5
452.597	34.9	46.0	-11.1	36.8	2.7	32.0	10.5	17.0
479.983	36.7	46.0	-9.3	38.5	2.8	32.1	10.5	16.9
527.998	40.2	46.0	-5.8	40.9	3.0	32.1	10.5	18.0
540.026	38.6	46.0	-7.4	39.4	3.0	32.1	10.5	17.8
550.017	36.7	46.0	-9.3	37.7	3.0	32.1	10.5	17.7
600.004	39.1	46.0	-6.9	39.5	3.1	32.2	10.5	18.3
606.018	35.2	46.0	-10.8	35.4	3.1	32.2	10.5	18.4
624.028	35.4	46.0	-10.6	35.0	3.2	32.2	10.5	18.9
644.010	37.4	46.0	-8.6	36.5	3.3	32.2	10.5	19.3
648.052	35.9	46.0	-10.1	35.1	3.3	32.3	10.5	19.3
672.011	35.5	46.0	-10.5	34.7	3.4	32.3	10.5	19.2
708.030	38.4	46.0	-7.6	36.6	3.6	32.3	10.5	20.0
708.644	36.1	46.0	-9.9	34.3	3.6	32.3	10.5	20.0
708.903	37.4	46.0	-8.6	35.5	3.6	32.3	10.5	20.0
711.134	37.4	46.0	-8.6	35.5	3.6	32.3	10.5	20.1
719.961	36.3	46.0	-9.7	34.2	3.6	32.3	10.5	20.2
730.987	35.6	46.0	-10.4	33.4	3.7	32.2	10.5	20.2
768.978	36.2	46.0	-9.8	33.9	3.8	32.2	10.5	20.3
779.972	35.4	46.0	-10.6	32.8	3.8	32.1	10.5	20.5




1000.000	45.0	54.0	-9.0	38.3	4.2	30.8	10.5	22.8
----------	------	------	------	------	-----	------	------	------

Radiated Spurious Emissions 30 MHz - 1000 MHz (Vertical)

Frequency MHz	Peak FS dB(uV/m)	Limit@3m dB(uV/m)	Margin dB	RA dB(uV)	CF dB	AG dB	DCF dB	AF dB(1/m)
124.995	37.4	43.5	-6.1	45.9	1.2	32.0	10.5	11.8
164.862	36.0	43.5	-7.5	47.4	1.4	32.0	10.5	8.7
165.800	35.8	43.5	-7.7	47.0	1.4	32.0	10.5	8.9
168.839	36.7	43.5	-6.8	47.5	1.4	32.0	10.5	9.3
169.680	36.6	43.5	-6.9	47.2	1.4	32.0	10.5	9.4
170.715	36.7	43.5	-6.8	47.3	1.4	32.0	10.5	9.4
191.990	37.1	43.5	-6.4	47.6	1.5	32.0	10.5	9.5
193.995	36.7	43.5	-6.8	47.2	1.5	32.0	10.5	9.5
203.080	34.6	43.5	-8.9	44.8	1.6	32.0	10.5	9.7
204.438	34.9	43.5	-8.6	45.1	1.6	32.0	10.5	9.8
205.796	34.6	43.5	-8.9	44.6	1.6	32.0	10.5	9.9
207.025	36.2	43.5	-7.3	46.1	1.6	32.0	10.5	10.0
209.482	34.9	43.5	-8.6	44.6	1.6	32.0	10.5	10.2
210.905	35.4	43.5	-8.1	45.0	1.7	32.0	10.5	10.2
212.166	35.5	43.5	-8.0	45.0	1.7	32.0	10.5	10.3
214.623	35.4	43.5	-8.1	44.8	1.7	32.0	10.5	10.5
216.660	35.3	46.0	-10.7	44.5	1.7	32.0	10.5	10.6
217.242	35.1	46.0	-10.9	44.2	1.7	32.0	10.5	10.7
218.503	34.9	46.0	-11.1	43.9	1.7	32.0	10.5	10.7
221.187	40.4	46.0	-5.6	49.2	1.7	32.0	10.5	10.9
222.383	36.2	46.0	-9.8	44.9	1.7	32.0	10.5	11.1
225.002	34.6	46.0	-11.4	43.0	1.8	32.0	10.5	11.3
226.199	34.5	46.0	-11.5	42.7	1.8	32.0	10.5	11.4
227.492	34.8	46.0	-11.2	42.9	1.8	32.0	10.5	11.6
240.005	39.2	46.0	-6.8	46.8	1.9	32.0	10.5	12.0
242.753	34.5	46.0	-11.5	42.1	1.9	32.0	10.5	12.0
527.998	36.9	46.0	-9.1	37.5	3.0	32.1	10.5	18.0
551.989	36.0	46.0	-10.0	36.9	3.0	32.1	10.5	17.8
801.926	36.2	46.0	-9.8	32.9	3.8	32.1	10.5	21.1
975.071	37.8	54.0	-16.2	31.5	4.1	31.0	10.5	22.7
1000.000	38.3	54.0	-15.7	31.6	4.2	30.8	10.5	22.8

Out-of-Band Radiated Spurious Emissions (Cabinet Radiation) - 1 GHz to 18 GHz

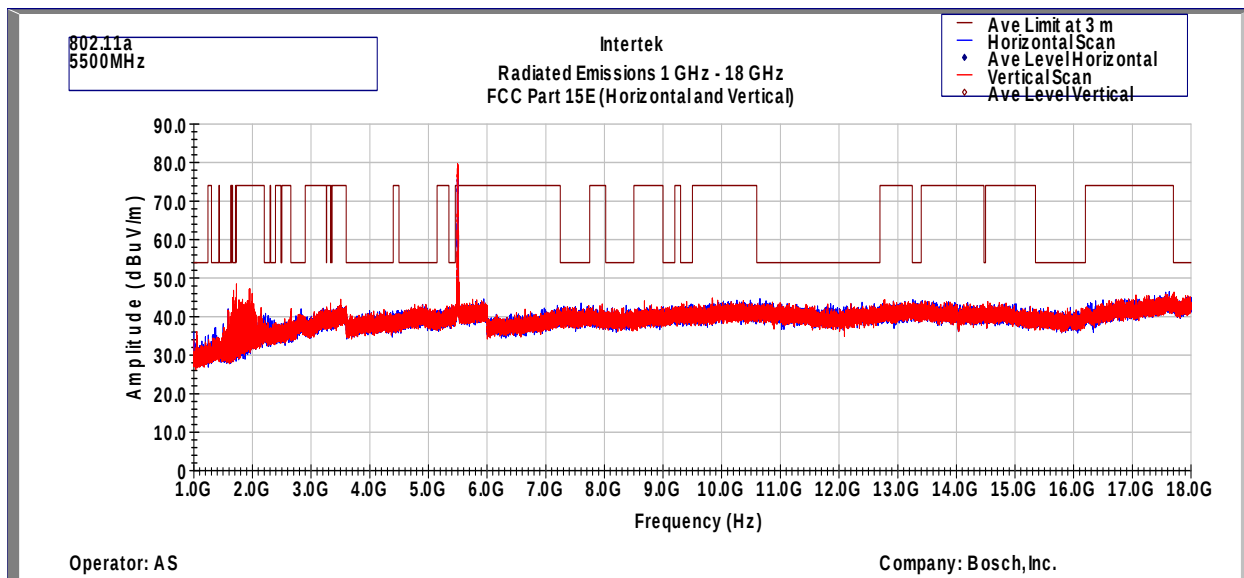

Note: Radiated emission measurements were performed up to 40GHz. No Emissions were identified when scanned from 18-40 GHz

Note: $FS@3m = RA + AF + CF - \text{Preamp, (Peak)}$

Corrected Peak Scans are under the Average Limit of 54.

**Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11a 5580MHz**

Radiated Spurious Emissions 30 MHz - 1000 MHz (Horizontal)


Frequency	Peak FS	Limit@3m	Margin	RA	CF	AG	DCF	AF
MHz	dB(uV/m)	dB(uV/m)	dB	dB(uV)	dB	dB	dB	dB(1/m)
168.678	36.9	43.5	-6.6	47.7	1.4	32.0	10.5	9.3
185.362	36.4	43.5	-7.1	47.1	1.5	32.0	10.5	9.3
191.990	35.3	43.5	-8.2	45.8	1.5	32.0	10.5	9.5
193.962	34.8	43.5	-8.7	45.3	1.5	32.0	10.5	9.5
198.133	34.5	43.5	-9.0	45.0	1.6	32.0	10.5	9.4
216.014	39.1	46.0	-6.9	48.4	1.7	32.0	10.5	10.6
249.996	40.8	46.0	-5.2	48.6	1.9	32.0	10.5	11.8
300.016	36.0	46.0	-10.0	41.9	2.3	32.0	10.5	13.3
312.011	37.0	46.0	-9.0	42.5	2.3	32.0	10.5	13.6
323.296	36.3	46.0	-9.7	41.5	2.4	32.0	10.5	13.9
387.898	34.8	46.0	-11.2	38.3	2.5	32.0	10.5	15.5
389.999	34.7	46.0	-11.3	38.1	2.5	32.0	10.5	15.5
420.005	35.7	46.0	-10.3	38.1	2.6	32.0	10.5	16.5
452.564	35.9	46.0	-10.1	37.7	2.7	32.0	10.5	17.0
480.015	36.7	46.0	-9.3	38.5	2.8	32.1	10.5	16.9
539.994	37.9	46.0	-8.1	38.7	3.0	32.1	10.5	17.9
549.985	35.5	46.0	-10.5	36.5	3.0	32.1	10.5	17.7
600.004	39.6	46.0	-6.4	39.9	3.1	32.2	10.5	18.3
606.018	35.0	46.0	-11.0	35.2	3.1	32.2	10.5	18.4
624.028	35.1	46.0	-10.9	34.7	3.2	32.2	10.5	18.9
644.010	36.0	46.0	-10.0	35.1	3.3	32.2	10.5	19.3
648.052	35.7	46.0	-10.3	34.9	3.3	32.3	10.5	19.3
672.011	35.4	46.0	-10.6	34.6	3.4	32.3	10.5	19.2
711.134	38.1	46.0	-7.9	36.2	3.6	32.3	10.5	20.1
730.987	37.5	46.0	-8.5	35.3	3.7	32.2	10.5	20.2
769.011	36.8	46.0	-9.2	34.4	3.8	32.2	10.5	20.3
779.972	35.0	46.0	-11.0	32.4	3.8	32.1	10.5	20.5
801.958	36.0	46.0	-10.0	32.6	3.8	32.1	10.5	21.1
925.827	37.7	46.0	-8.3	32.0	4.0	31.4	10.5	22.5
960.004	37.5	54.0	-16.5	31.7	4.1	31.1	10.5	22.4
1000.000	42.6	54.0	-11.4	35.9	4.2	30.8	10.5	22.8

Radiated Spurious Emissions 30 MHz - 1000 MHz (Vertical)

Frequency MHz	Peak FS dB(uV/m)	Limit@3m dB(uV/m)	Margin dB	RA dB(uV)	CF dB	AG dB	DCF dB	AF dB(1/m)
124.995	38.3	43.5	-5.2	46.8	1.2	32.0	10.5	11.8
125.771	35.1	43.5	-8.4	43.7	1.2	32.0	10.5	11.8
163.925	34.5	43.5	-9.0	46.0	1.4	32.0	10.5	8.6
164.830	34.9	43.5	-8.6	46.3	1.4	32.0	10.5	8.7
165.832	35.0	43.5	-8.5	46.2	1.4	32.0	10.5	8.9
166.770	35.5	43.5	-8.0	46.6	1.4	32.0	10.5	9.0
167.708	36.3	43.5	-7.2	47.2	1.4	32.0	10.5	9.1
171.685	36.1	43.5	-7.4	46.8	1.4	32.0	10.5	9.4
192.022	37.5	43.5	-6.0	48.0	1.5	32.0	10.5	9.5
193.995	35.9	43.5	-7.6	46.4	1.5	32.0	10.5	9.5
204.503	34.0	43.5	-9.5	44.1	1.6	32.0	10.5	9.8
207.025	34.5	43.5	-9.0	44.5	1.6	32.0	10.5	10.0
209.612	34.2	43.5	-9.3	43.9	1.6	32.0	10.5	10.2
210.873	35.6	43.5	-7.9	45.2	1.7	32.0	10.5	10.2
212.166	35.4	43.5	-8.1	44.9	1.7	32.0	10.5	10.3
213.492	34.4	43.5	-9.1	43.8	1.7	32.0	10.5	10.4
214.591	35.1	43.5	-8.4	44.5	1.7	32.0	10.5	10.5
217.242	34.7	46.0	-11.3	43.8	1.7	32.0	10.5	10.7
219.829	34.0	46.0	-12.0	43.0	1.7	32.0	10.5	10.8
222.416	34.6	46.0	-11.4	43.3	1.7	32.0	10.5	11.1
224.905	34.7	46.0	-11.3	43.1	1.8	32.0	10.5	11.3
229.982	34.6	46.0	-11.4	42.5	1.8	32.0	10.5	11.8
232.601	34.7	46.0	-11.3	42.5	1.8	32.0	10.5	11.9
237.160	35.1	46.0	-10.9	42.7	1.8	32.0	10.5	12.0
240.005	38.8	46.0	-7.2	46.3	1.9	32.0	10.5	12.0
242.883	34.6	46.0	-11.4	42.3	1.9	32.0	10.5	12.0
253.100	34.1	46.0	-11.9	41.5	2.0	32.0	10.5	12.1
499.997	36.5	46.0	-9.5	37.8	2.9	32.1	10.5	17.3
527.998	36.3	46.0	-9.7	36.9	3.0	32.1	10.5	18.0
552.022	35.6	46.0	-10.4	36.5	3.0	32.1	10.5	17.8
801.926	36.6	46.0	-9.4	33.3	3.8	32.1	10.5	21.1
995.829	37.2	54.0	-16.8	30.6	4.2	30.8	10.5	22.8



Out-of-Band Radiated Spurious Emissions (Cabinet Radiation) - 1 GHz to 18 GHz

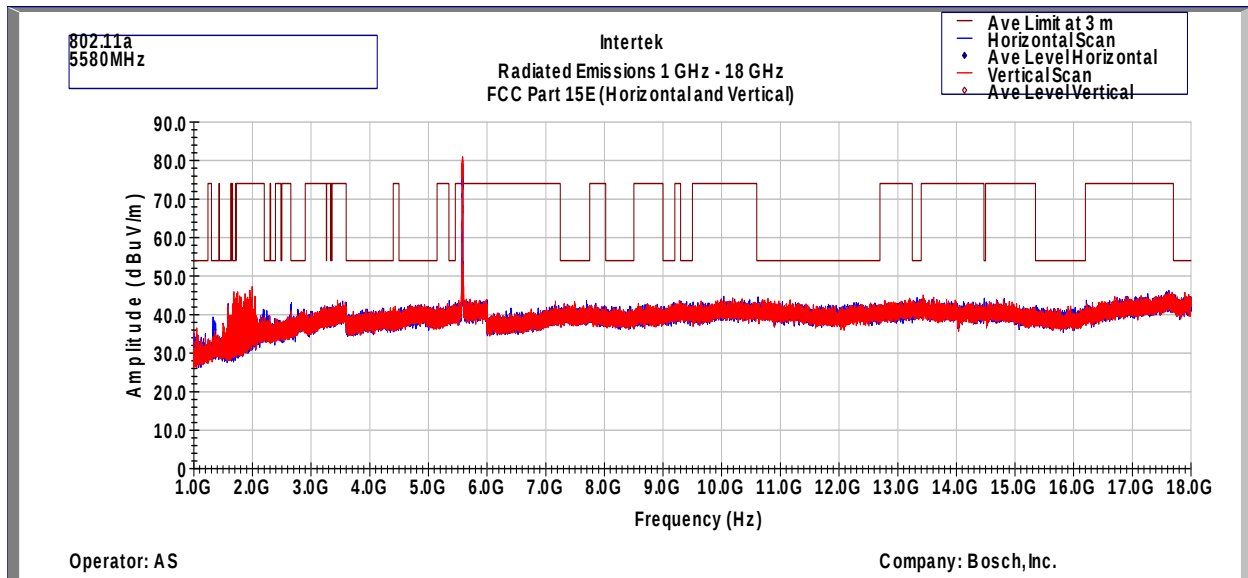

Note: Radiated emission measurements were performed up to 40GHz. No Emissions were identified when scanned from 18-40 GHz

Note: $FS@3m = RA + AF + CF - \text{Preamp, (Peak)}$

Corrected Peak Scans are under the Average Limit of 54.

**Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11a 5700MHz**


Radiated Spurious Emissions 30 MHz - 1000 MHz (Horizontal)

Frequency	Peak FS	Limit@3m	Margin	RA	CF	AG	DCF	AF
MHz	dB(uV/m)	dB(uV/m)	dB	dB(uV)	dB	dB	dB	dB(1/m)
172.655	36.1	43.5	-7.4	46.8	1.4	32.0	10.5	9.4
191.990	36.2	43.5	-7.3	46.7	1.5	32.0	10.5	9.5
193.962	35.3	43.5	-8.2	45.8	1.5	32.0	10.5	9.5
216.014	39.3	46.0	-6.7	48.5	1.7	32.0	10.5	10.6
300.016	36.0	46.0	-10.0	41.8	2.3	32.0	10.5	13.3
312.011	36.5	46.0	-9.5	42.1	2.3	32.0	10.5	13.6
323.263	38.2	46.0	-7.8	43.4	2.4	32.0	10.5	13.9
338.007	34.3	46.0	-11.7	39.0	2.4	32.0	10.5	14.4
389.999	34.3	46.0	-11.7	37.7	2.5	32.0	10.5	15.5
420.005	35.9	46.0	-10.1	38.3	2.6	32.0	10.5	16.5
452.564	35.1	46.0	-10.9	36.9	2.7	32.0	10.5	17.0
479.983	36.4	46.0	-9.6	38.2	2.8	32.1	10.5	16.9
527.998	39.6	46.0	-6.4	40.3	3.0	32.1	10.5	18.0
539.994	38.6	46.0	-7.4	39.4	3.0	32.1	10.5	17.9
550.017	34.9	46.0	-11.1	35.9	3.0	32.1	10.5	17.7
600.037	39.2	46.0	-6.8	39.5	3.1	32.2	10.5	18.3
605.986	35.2	46.0	-10.8	35.4	3.1	32.2	10.5	18.4
623.996	35.2	46.0	-10.8	34.8	3.2	32.2	10.5	18.9
644.010	36.7	46.0	-9.3	35.9	3.3	32.2	10.5	19.3
648.019	35.7	46.0	-10.3	34.9	3.3	32.3	10.5	19.3
660.015	34.2	46.0	-11.8	33.3	3.4	32.3	10.5	19.3
672.011	34.6	46.0	-11.4	33.8	3.4	32.3	10.5	19.2
696.034	34.5	46.0	-11.5	33.2	3.6	32.3	10.5	19.6
711.166	37.9	46.0	-8.1	36.0	3.6	32.3	10.5	20.1
730.987	37.7	46.0	-8.3	35.6	3.7	32.2	10.5	20.2
769.011	36.9	46.0	-9.1	34.5	3.8	32.2	10.5	20.3
775.833	38.8	46.0	-7.2	36.2	3.8	32.2	10.5	20.4
801.926	36.3	46.0	-9.7	33.0	3.8	32.1	10.5	21.1
935.980	37.6	46.0	-8.4	31.8	4.0	31.3	10.5	22.6
981.020	38.2	54.0	-15.8	31.7	4.1	31.0	10.5	22.8
1000.000	42.1	54.0	-11.9	35.4	4.2	30.8	10.5	22.8

Radiated Spurious Emissions 30 MHz - 1000 MHz (Vertical)

Frequency	Peak FS	Limit@3m	Margin	RA	CF	AG	DCF	AF
MHz	dB(uV/m)	dB(uV/m)	dB	dB(uV)	dB	dB	dB	dB(1/m)
124.995	38.1	43.5	-5.4	46.6	1.2	32.0	10.5	11.8
125.836	35.9	43.5	-7.6	44.4	1.2	32.0	10.5	11.8
170.618	36.4	43.5	-7.1	47.1	1.4	32.0	10.5	9.4
191.990	37.3	43.5	-6.2	47.8	1.5	32.0	10.5	9.5
193.962	37.4	43.5	-6.1	47.9	1.5	32.0	10.5	9.5
199.362	34.7	43.5	-8.8	45.2	1.6	32.0	10.5	9.4
204.438	37.0	43.5	-6.5	47.2	1.6	32.0	10.5	9.8
205.764	34.5	43.5	-9.0	44.5	1.6	32.0	10.5	9.9
207.057	34.6	43.5	-8.9	44.5	1.6	32.0	10.5	10.0
209.612	34.9	43.5	-8.6	44.6	1.6	32.0	10.5	10.2
210.905	35.0	43.5	-8.5	44.6	1.7	32.0	10.5	10.2
212.134	35.1	43.5	-8.4	44.6	1.7	32.0	10.5	10.3
213.459	34.5	43.5	-9.0	43.9	1.7	32.0	10.5	10.4
214.785	35.5	43.5	-8.0	44.8	1.7	32.0	10.5	10.5
217.210	36.6	46.0	-9.4	45.7	1.7	32.0	10.5	10.7
219.797	34.1	46.0	-11.9	43.1	1.7	32.0	10.5	10.8
221.155	34.2	46.0	-11.8	43.0	1.7	32.0	10.5	10.9
222.319	36.2	46.0	-9.8	44.9	1.7	32.0	10.5	11.1
224.938	35.4	46.0	-10.6	43.8	1.8	32.0	10.5	11.3
226.231	35.5	46.0	-10.5	43.7	1.8	32.0	10.5	11.5
227.492	35.0	46.0	-11.0	43.1	1.8	32.0	10.5	11.6
228.753	34.7	46.0	-11.3	42.7	1.8	32.0	10.5	11.7
237.677	34.0	46.0	-12.0	41.7	1.8	32.0	10.5	12.0
240.037	38.7	46.0	-7.3	46.3	1.9	32.0	10.5	12.0
256.883	34.7	46.0	-11.3	41.7	2.0	32.0	10.5	12.5
500.030	36.1	46.0	-9.9	37.4	2.9	32.1	10.5	17.3
527.998	36.1	46.0	-9.9	36.7	3.0	32.1	10.5	18.0
539.994	34.1	46.0	-11.9	34.9	3.0	32.1	10.5	17.9
551.989	35.6	46.0	-10.4	36.5	3.0	32.1	10.5	17.8
801.926	36.3	46.0	-9.7	32.9	3.8	32.1	10.5	21.1
873.415	35.5	46.0	-10.5	31.2	3.9	31.8	10.5	21.6
997.704	37.1	54.0	-16.9	30.4	4.2	30.8	10.5	22.8

Out-of-Band Radiated Spurious Emissions (Cabinet Radiation) - 1 GHz to 18 GHz

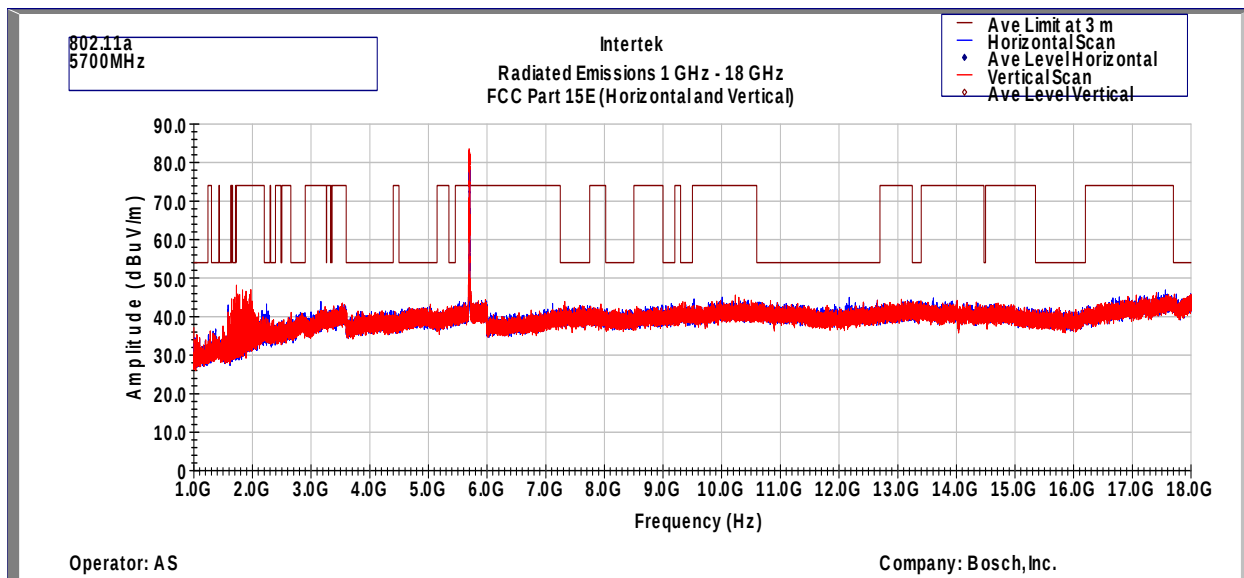

Note: Radiated emission measurements were performed up to 40GHz. No Emissions were identified when scanned from 18-40 GHz

Note: $FS@3m = RA + AF + CF - \text{Preamp, (Peak)}$

Corrected Peak Scans are under the Average Limit of 54.




Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11n 20MHz 5500MHz
Radiated Spurious Emissions 30 MHz - 1000 MHz (Horizontal)

Frequency	Peak FS	Limit@3m	Margin	RA	CF	AG	DCF	AF
MHz	dB(uV/m)	dB(uV/m)	dB	dB(uV)	dB	dB	dB	dB(1/m)
167.966	35.4	43.5	-8.1	46.4	1.4	32.0	10.5	9.2
168.710	37.9	43.5	-5.6	48.7	1.4	32.0	10.5	9.3
180.512	36.5	43.5	-7.0	47.4	1.5	32.0	10.5	9.1
191.990	35.2	43.5	-8.3	45.7	1.5	32.0	10.5	9.5
193.995	35.3	43.5	-8.2	45.8	1.5	32.0	10.5	9.5
204.503	35.3	43.5	-8.2	45.4	1.6	32.0	10.5	9.8
216.014	39.3	46.0	-6.7	48.6	1.7	32.0	10.5	10.6
300.016	35.9	46.0	-10.1	41.7	2.3	32.0	10.5	13.3
312.011	37.0	46.0	-9.0	42.5	2.3	32.0	10.5	13.6
323.296	37.1	46.0	-8.9	42.2	2.4	32.0	10.5	13.9
387.898	36.5	46.0	-9.5	39.9	2.5	32.0	10.5	15.5
420.005	35.9	46.0	-10.1	38.3	2.6	32.0	10.5	16.5
479.983	37.2	46.0	-8.8	38.9	2.8	32.1	10.5	16.9
527.998	40.1	46.0	-5.9	40.7	3.0	32.1	10.5	18.0
539.994	39.6	46.0	-6.4	40.4	3.0	32.1	10.5	17.9
550.017	35.5	46.0	-10.5	36.5	3.0	32.1	10.5	17.7
564.567	35.4	46.0	-10.6	35.8	3.0	32.2	10.5	18.3
600.004	39.0	46.0	-7.0	39.4	3.1	32.2	10.5	18.3
605.986	35.2	46.0	-10.8	35.4	3.1	32.2	10.5	18.4
623.996	35.5	46.0	-10.5	35.2	3.2	32.2	10.5	18.9
644.010	36.2	46.0	-9.8	35.3	3.3	32.2	10.5	19.3
648.019	36.7	46.0	-9.3	35.8	3.3	32.3	10.5	19.3
711.199	38.0	46.0	-8.0	36.1	3.6	32.3	10.5	20.1
730.987	35.8	46.0	-10.2	33.6	3.7	32.2	10.5	20.2
768.978	36.3	46.0	-9.7	33.9	3.8	32.2	10.5	20.3
775.865	39.4	46.0	-6.6	36.8	3.8	32.2	10.5	20.4
801.958	36.1	46.0	-9.9	32.7	3.8	32.1	10.5	21.1
823.880	35.6	46.0	-10.4	32.0	3.9	32.0	10.5	21.2
840.015	35.6	46.0	-10.4	32.1	3.9	31.9	10.5	21.0
887.997	37.9	46.0	-8.1	33.3	4.0	31.7	10.5	21.8
954.313	37.3	46.0	-8.7	31.5	4.1	31.2	10.5	22.4
1000.000	41.9	54.0	-12.1	35.2	4.2	30.8	10.5	22.8

Radiated Spurious Emissions 30 MHz - 1000 MHz (Vertical)

Frequency MHz	Peak FS dB(uV/m)	Limit@3m dB(uV/m)	Margin dB	RA dB(uV)	CF dB	AG dB	DCF dB	AF dB(1/m)
123.767	34.7	43.5	-8.8	43.1	1.2	32.0	10.5	11.9
124.995	38.3	43.5	-5.2	46.8	1.2	32.0	10.5	11.8
126.547	35.9	43.5	-7.6	44.5	1.2	32.0	10.5	11.8
129.296	34.5	43.5	-9.0	43.1	1.2	32.0	10.5	11.6
166.802	34.5	43.5	-9.0	45.6	1.4	32.0	10.5	9.0
167.837	36.4	43.5	-7.1	47.3	1.4	32.0	10.5	9.2
168.645	36.5	43.5	-7.0	47.3	1.4	32.0	10.5	9.3
184.004	38.4	43.5	-5.1	49.1	1.5	32.0	10.5	9.3
192.022	37.5	43.5	-6.0	48.0	1.5	32.0	10.5	9.5
193.995	35.6	43.5	-7.9	46.1	1.5	32.0	10.5	9.5
203.274	34.3	43.5	-9.2	44.6	1.6	32.0	10.5	9.7
204.503	35.2	43.5	-8.3	45.3	1.6	32.0	10.5	9.8
206.993	36.0	43.5	-7.5	45.9	1.6	32.0	10.5	10.0
209.612	35.0	43.5	-8.5	44.7	1.6	32.0	10.5	10.2
212.166	35.4	43.5	-8.1	44.9	1.7	32.0	10.5	10.3
213.459	35.6	43.5	-7.9	45.0	1.7	32.0	10.5	10.4
214.753	35.1	43.5	-8.4	44.5	1.7	32.0	10.5	10.5
217.275	35.7	46.0	-10.3	44.8	1.7	32.0	10.5	10.7
219.829	35.1	46.0	-10.9	44.0	1.7	32.0	10.5	10.8
222.351	35.7	46.0	-10.3	44.3	1.7	32.0	10.5	11.1
224.905	34.5	46.0	-11.5	42.9	1.8	32.0	10.5	11.3
227.427	34.2	46.0	-11.8	42.4	1.8	32.0	10.5	11.6
230.046	34.7	46.0	-11.3	42.6	1.8	32.0	10.5	11.8
240.005	39.0	46.0	-7.0	46.6	1.9	32.0	10.5	12.0
264.546	34.6	46.0	-11.4	41.2	2.0	32.0	10.5	12.8
387.898	34.6	46.0	-11.4	38.0	2.5	32.0	10.5	15.5
527.998	36.0	46.0	-10.0	36.7	3.0	32.1	10.5	18.0
551.989	36.0	46.0	-10.0	36.9	3.0	32.1	10.5	17.8
801.926	37.0	46.0	-9.0	33.7	3.8	32.1	10.5	21.1
858.283	36.6	46.0	-9.4	32.8	3.9	31.8	10.5	21.2
890.164	36.1	46.0	-9.9	31.5	4.0	31.7	10.5	21.8
984.706	37.6	54.0	-16.4	31.0	4.1	30.9	10.5	22.8

Out-of-Band Radiated Spurious Emissions (Cabinet Radiation) - 1 GHz to 18 GHz

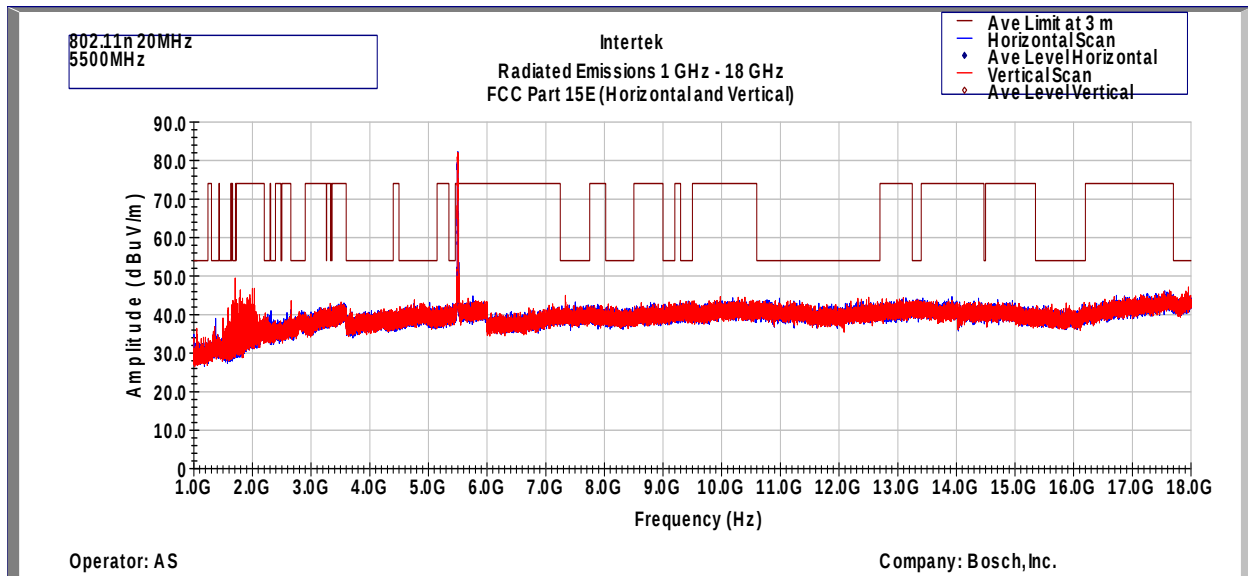

Note: Radiated emission measurements were performed up to 40GHz. No Emissions were identified when scanned from 18-40 GHz

Note: $FS@3m = RA + AF + CF - \text{Preamp, (Peak)}$

Corrected Peak Scans are under the Average Limit of 54.




Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11n 20MHz 5580MHz
Radiated Spurious Emissions 30 MHz - 1000 MHz (Horizontal)

Frequency	Peak FS	Limit@3m	Margin	RA	CF	AG	DCF	AF
MHz	dB(uV/m)	dB(uV/m)	dB	dB(uV)	dB	dB	dB	dB(1/m)
167.999	36.3	43.5	-7.2	47.2	1.4	32.0	10.5	9.2
169.712	36.1	43.5	-7.4	46.8	1.4	32.0	10.5	9.4
191.990	36.1	43.5	-7.4	46.6	1.5	32.0	10.5	9.5
193.995	35.6	43.5	-7.9	46.1	1.5	32.0	10.5	9.5
216.014	39.1	46.0	-6.9	48.3	1.7	32.0	10.5	10.6
249.996	41.0	46.0	-5.0	48.7	1.9	32.0	10.5	11.8
300.016	36.3	46.0	-9.7	42.1	2.3	32.0	10.5	13.3
312.044	36.9	46.0	-9.1	42.5	2.3	32.0	10.5	13.6
323.296	37.8	46.0	-8.2	43.0	2.4	32.0	10.5	13.9
338.040	34.9	46.0	-11.1	39.5	2.4	32.0	10.5	14.4
387.898	35.8	46.0	-10.2	39.2	2.5	32.0	10.5	15.5
389.999	34.6	46.0	-11.4	38.1	2.5	32.0	10.5	15.5
420.005	35.8	46.0	-10.2	38.2	2.6	32.0	10.5	16.5
480.015	36.5	46.0	-9.5	38.3	2.8	32.1	10.5	16.9
527.998	40.0	46.0	-6.0	40.7	3.0	32.1	10.5	18.0
539.994	38.8	46.0	-7.2	39.6	3.0	32.1	10.5	17.9
550.017	35.1	46.0	-10.9	36.1	3.0	32.1	10.5	17.7
600.037	38.5	46.0	-7.5	38.8	3.1	32.2	10.5	18.3
605.986	34.9	46.0	-11.1	35.1	3.1	32.2	10.5	18.4
624.028	35.6	46.0	-10.4	35.3	3.2	32.2	10.5	18.9
644.010	37.3	46.0	-8.7	36.4	3.3	32.2	10.5	19.3
648.052	36.8	46.0	-9.2	36.0	3.3	32.3	10.5	19.3
672.011	34.3	46.0	-11.7	33.5	3.4	32.3	10.5	19.2
695.970	34.4	46.0	-11.6	33.1	3.6	32.3	10.5	19.6
711.199	38.0	46.0	-8.0	36.1	3.6	32.3	10.5	20.1
719.993	34.5	46.0	-11.5	32.4	3.6	32.3	10.5	20.2
730.987	36.2	46.0	-9.8	34.1	3.7	32.2	10.5	20.2
768.978	36.7	46.0	-9.3	34.4	3.8	32.2	10.5	20.3
775.833	39.0	46.0	-7.0	36.5	3.8	32.2	10.5	20.4
801.926	36.5	46.0	-9.5	33.2	3.8	32.1	10.5	21.1
945.130	37.7	46.0	-8.3	32.0	4.1	31.2	10.5	22.5
984.092	39.2	54.0	-14.8	32.7	4.1	30.9	10.5	22.8
1000.000	42.4	54.0	-11.6	35.7	4.2	30.8	10.5	22.8

Radiated Spurious Emissions 30 MHz - 1000 MHz (Vertical)

Frequency MHz	Peak FS dB(uV/m)	Limit@3m dB(uV/m)	Margin dB	RA dB(uV)	CF dB	AG dB	DCF dB	AF dB(1/m)
123.864	34.7	43.5	-8.8	43.2	1.2	32.0	10.5	11.9
124.995	37.9	43.5	-5.6	46.4	1.2	32.0	10.5	11.8
125.836	35.5	43.5	-8.0	44.0	1.2	32.0	10.5	11.8
164.862	34.3	43.5	-9.2	45.7	1.4	32.0	10.5	8.7
167.805	36.4	43.5	-7.1	47.3	1.4	32.0	10.5	9.1
168.839	36.5	43.5	-7.0	47.3	1.4	32.0	10.5	9.3
192.022	37.9	43.5	-5.6	48.4	1.5	32.0	10.5	9.5
203.210	34.7	43.5	-8.8	44.9	1.6	32.0	10.5	9.7
204.471	34.9	43.5	-8.6	45.0	1.6	32.0	10.5	9.8
207.090	35.2	43.5	-8.3	45.1	1.6	32.0	10.5	10.0
208.351	34.8	43.5	-8.7	44.6	1.6	32.0	10.5	10.1
209.612	35.0	43.5	-8.5	44.7	1.6	32.0	10.5	10.2
210.905	35.1	43.5	-8.4	44.7	1.7	32.0	10.5	10.2
212.134	35.0	43.5	-8.5	44.5	1.7	32.0	10.5	10.3
213.427	34.7	43.5	-8.8	44.2	1.7	32.0	10.5	10.4
214.720	35.6	43.5	-7.9	44.9	1.7	32.0	10.5	10.5
217.307	34.6	46.0	-11.4	43.7	1.7	32.0	10.5	10.7
219.861	34.8	46.0	-11.2	43.8	1.7	32.0	10.5	10.8
222.383	36.0	46.0	-10.0	44.7	1.7	32.0	10.5	11.1
224.970	34.3	46.0	-11.7	42.7	1.8	32.0	10.5	11.3
226.263	35.6	46.0	-10.4	43.9	1.8	32.0	10.5	11.5
227.557	35.3	46.0	-10.7	43.5	1.8	32.0	10.5	11.6
228.818	34.1	46.0	-11.9	42.1	1.8	32.0	10.5	11.7
230.046	34.1	46.0	-11.9	42.0	1.8	32.0	10.5	11.8
240.037	38.9	46.0	-7.1	46.4	1.9	32.0	10.5	12.0
499.997	36.8	46.0	-9.2	38.1	2.9	32.1	10.5	17.3
527.998	36.0	46.0	-10.0	36.7	3.0	32.1	10.5	18.0
539.994	34.9	46.0	-11.1	35.7	3.0	32.1	10.5	17.9
552.022	36.2	46.0	-9.8	37.1	3.0	32.1	10.5	17.8
801.926	38.1	46.0	-7.9	34.8	3.8	32.1	10.5	21.1
917.162	37.1	46.0	-8.9	31.7	4.0	31.5	10.5	22.3

Out-of-Band Radiated Spurious Emissions (Cabinet Radiation) - 1 GHz to 18 GHz

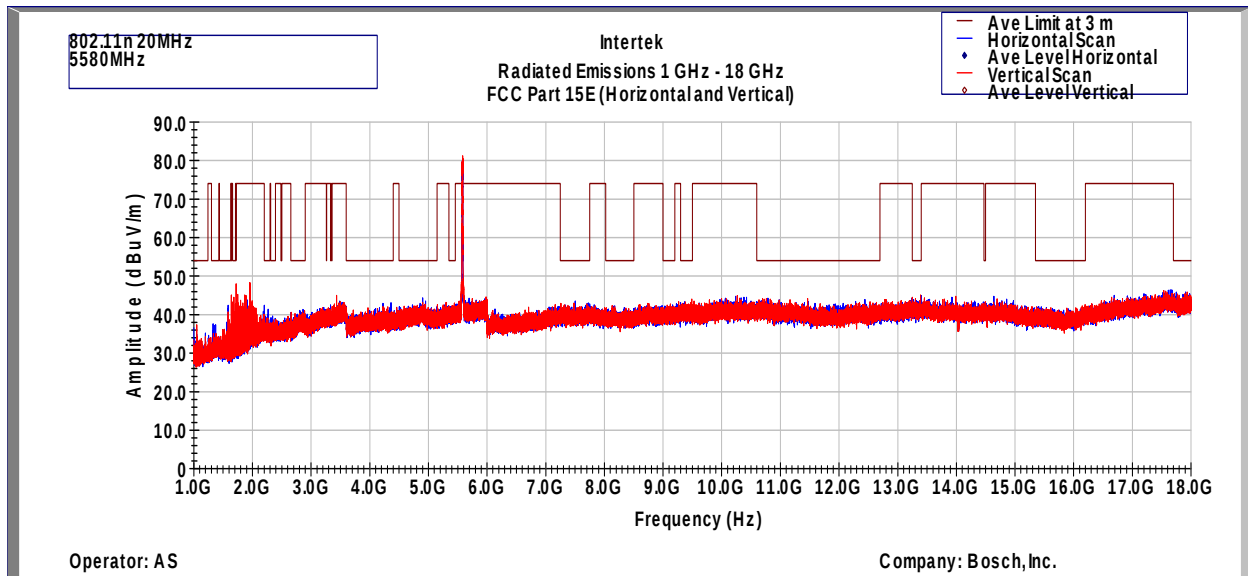

Note: Radiated emission measurements were performed up to 40GHz. No Emissions were identified when scanned from 18-40 GHz

Note: $FS@3m = RA + AF + CF - \text{Preamp, (Peak)}$

Corrected Peak Scans are under the Average Limit of 54.




Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11n 20MHz 5700MHz
Radiated Spurious Emissions 30 MHz - 1000 MHz (Horizontal)

Frequency	Peak FS	Limit@3m	Margin	RA	CF	AG	DCF	AF
MHz	dB(uV/m)	dB(uV/m)	dB	dB(uV)	dB	dB	dB	dB(1/m)
167.999	37.4	43.5	-6.1	48.3	1.4	32.0	10.5	9.2
191.990	35.4	43.5	-8.1	45.9	1.5	32.0	10.5	9.5
193.995	34.8	43.5	-8.7	45.3	1.5	32.0	10.5	9.5
204.471	34.6	43.5	-8.9	44.7	1.6	32.0	10.5	9.8
249.996	40.9	46.0	-5.1	48.6	1.9	32.0	10.5	11.8
300.016	35.3	46.0	-10.7	41.1	2.3	32.0	10.5	13.3
312.011	37.6	46.0	-8.4	43.1	2.3	32.0	10.5	13.6
323.296	37.1	46.0	-8.9	42.3	2.4	32.0	10.5	13.9
387.898	35.0	46.0	-11.0	38.5	2.5	32.0	10.5	15.5
389.999	35.1	46.0	-10.9	38.5	2.5	32.0	10.5	15.5
394.009	35.4	46.0	-10.6	38.6	2.6	32.0	10.5	15.7
420.005	36.8	46.0	-9.2	39.2	2.6	32.0	10.5	16.5
452.564	33.9	46.0	-12.1	35.7	2.7	32.0	10.5	17.0
479.983	37.3	46.0	-8.7	39.1	2.8	32.1	10.5	16.9
527.998	40.2	46.0	-5.8	40.9	3.0	32.1	10.5	18.0
539.994	37.8	46.0	-8.2	38.6	3.0	32.1	10.5	17.9
550.017	35.7	46.0	-10.3	36.6	3.0	32.1	10.5	17.7
600.004	39.6	46.0	-6.4	39.9	3.1	32.2	10.5	18.3
606.018	34.7	46.0	-11.3	34.9	3.1	32.2	10.5	18.4
624.028	35.2	46.0	-10.8	34.9	3.2	32.2	10.5	18.9
644.010	36.5	46.0	-9.5	35.6	3.3	32.2	10.5	19.3
648.019	36.9	46.0	-9.1	36.0	3.3	32.3	10.5	19.3
660.015	34.9	46.0	-11.1	34.0	3.4	32.3	10.5	19.3
672.011	36.4	46.0	-9.6	35.5	3.4	32.3	10.5	19.2
695.970	34.0	46.0	-12.0	32.6	3.6	32.3	10.5	19.6
711.199	37.4	46.0	-8.6	35.5	3.6	32.3	10.5	20.1
719.993	34.3	46.0	-11.7	32.1	3.6	32.3	10.5	20.2
730.987	35.8	46.0	-10.2	33.6	3.7	32.2	10.5	20.2
769.011	36.8	46.0	-9.2	34.4	3.8	32.2	10.5	20.3
801.958	35.8	46.0	-10.2	32.5	3.8	32.1	10.5	21.1
1000.000	44.7	54.0	-9.3	38.1	4.2	30.8	10.5	22.8

Radiated Spurious Emissions 30 MHz - 1000 MHz (Vertical)

Frequency MHz	Peak FS dB(uV/m)	Limit@3m dB(uV/m)	Margin dB	RA dB(uV)	CF dB	AG dB	DCF dB	AF dB(1/m)
123.896	35.5	43.5	-8.0	43.9	1.2	32.0	10.5	11.9
124.995	38.2	43.5	-5.3	46.7	1.2	32.0	10.5	11.8
165.929	35.2	43.5	-8.3	46.4	1.4	32.0	10.5	8.9
166.835	35.5	43.5	-8.0	46.6	1.4	32.0	10.5	9.0
170.003	36.8	43.5	-6.7	47.4	1.4	32.0	10.5	9.4
170.715	36.3	43.5	-7.2	46.9	1.4	32.0	10.5	9.4
184.068	38.2	43.5	-5.3	49.0	1.5	32.0	10.5	9.3
193.962	36.1	43.5	-7.4	46.6	1.5	32.0	10.5	9.5
207.122	36.3	43.5	-7.2	46.2	1.6	32.0	10.5	10.0
209.612	35.4	43.5	-8.1	45.1	1.6	32.0	10.5	10.2
210.905	35.0	43.5	-8.5	44.6	1.7	32.0	10.5	10.2
212.134	35.4	43.5	-8.1	44.9	1.7	32.0	10.5	10.3
213.427	35.4	43.5	-8.1	44.8	1.7	32.0	10.5	10.4
217.339	35.2	46.0	-10.8	44.3	1.7	32.0	10.5	10.7
222.351	36.2	46.0	-9.8	44.9	1.7	32.0	10.5	11.1
224.970	35.0	46.0	-11.0	43.4	1.8	32.0	10.5	11.3
240.005	39.2	46.0	-6.8	46.7	1.9	32.0	10.5	12.0
499.997	35.9	46.0	-10.1	37.2	2.9	32.1	10.5	17.3
527.998	35.7	46.0	-10.3	36.3	3.0	32.1	10.5	18.0
551.989	35.3	46.0	-10.7	36.2	3.0	32.1	10.5	17.8
624.998	37.7	46.0	-8.3	37.4	3.2	32.2	10.5	18.9
704.732	38.1	46.0	-7.9	36.4	3.6	32.3	10.5	19.9
712.848	39.4	46.0	-6.6	37.5	3.6	32.3	10.5	20.1
750.031	38.3	46.0	-7.7	36.5	3.7	32.2	10.5	19.8
801.958	37.3	46.0	-8.7	34.0	3.8	32.1	10.5	21.1
931.938	37.6	46.0	-8.4	31.8	4.0	31.4	10.5	22.6
984.545	37.9	54.0	-16.1	31.4	4.1	30.9	10.5	22.8

Out-of-Band Radiated Spurious Emissions (Cabinet Radiation) - 1 GHz to 18 GHz

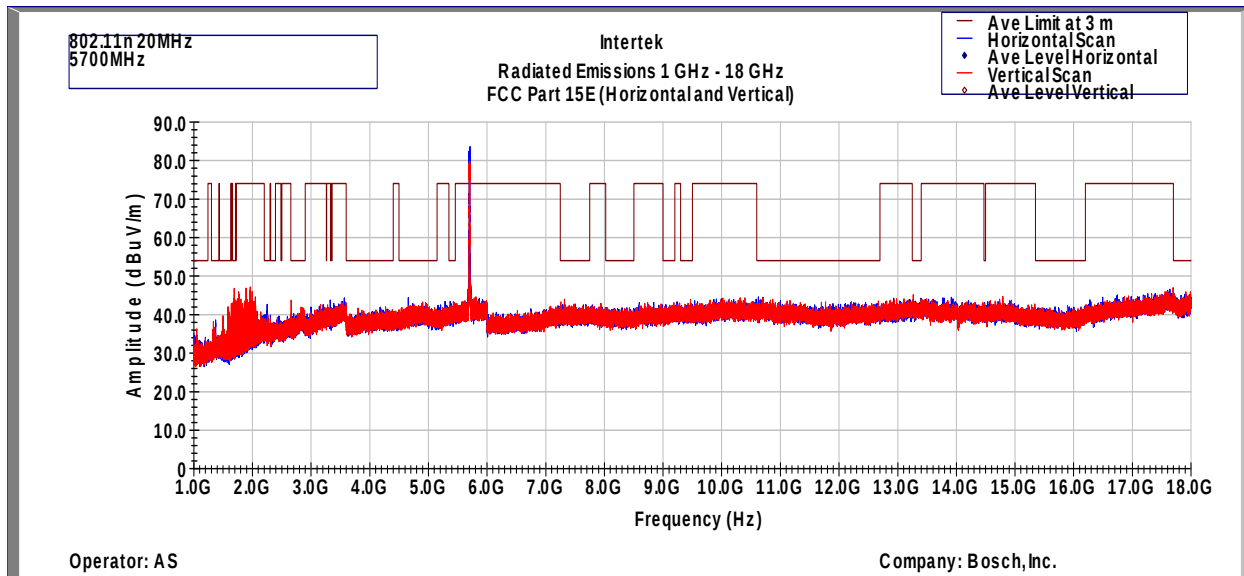

Note: Radiated emission measurements were performed up to 40GHz. No Emissions were identified when scanned from 18-40 GHz

Note: $FS@3m = RA + AF + CF - \text{Preamp, (Peak)}$

Corrected Peak Scans are under the Average Limit of 54.




Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11n 40MHz 5510MHz
Radiated Spurious Emissions 30 MHz - 1000 MHz (Horizontal)

Frequency	Peak FS	Limit@3m	Margin	RA	CF	AG	DCF	AF
MHz	dB(uV/m)	dB(uV/m)	dB	dB(uV)	dB	dB	dB	dB(1/m)
169.680	36.1	43.5	-7.4	46.7	1.4	32.0	10.5	9.4
191.990	34.9	43.5	-8.6	45.5	1.5	32.0	10.5	9.5
193.930	34.4	43.5	-9.1	44.9	1.5	32.0	10.5	9.5
201.981	32.8	43.5	-10.7	43.1	1.6	32.0	10.5	9.6
263.964	33.5	46.0	-12.5	40.1	2.0	32.0	10.5	12.8
299.951	36.1	46.0	-9.9	41.9	2.3	32.0	10.5	13.3
311.979	37.3	46.0	-8.7	42.8	2.3	32.0	10.5	13.6
323.231	36.5	46.0	-9.5	41.7	2.4	32.0	10.5	13.9
337.975	33.5	46.0	-12.5	38.2	2.4	32.0	10.5	14.4
383.953	33.3	46.0	-12.7	36.8	2.5	32.0	10.5	15.5
387.930	34.6	46.0	-11.4	38.0	2.5	32.0	10.5	15.5
389.967	34.2	46.0	-11.8	37.6	2.5	32.0	10.5	15.5
420.037	36.0	46.0	-10.0	38.4	2.6	32.0	10.5	16.5
452.629	34.8	46.0	-11.2	36.6	2.7	32.0	10.5	17.0
479.983	35.0	46.0	-11.0	36.8	2.8	32.1	10.5	16.9
527.998	38.9	46.0	-7.1	39.5	3.0	32.1	10.5	18.0
540.026	38.3	46.0	-7.7	39.1	3.0	32.1	10.5	17.8
550.017	36.1	46.0	-9.9	37.1	3.0	32.1	10.5	17.7
558.262	33.2	46.0	-12.8	33.9	3.0	32.2	10.5	18.0
599.972	38.9	46.0	-7.1	39.3	3.1	32.2	10.5	18.3
605.986	34.0	46.0	-12.0	34.2	3.1	32.2	10.5	18.4
624.028	33.9	46.0	-12.1	33.5	3.2	32.2	10.5	18.9
644.010	35.6	46.0	-10.4	34.7	3.3	32.2	10.5	19.3
647.987	36.4	46.0	-9.6	35.6	3.3	32.3	10.5	19.3
672.043	35.4	46.0	-10.6	34.6	3.4	32.3	10.5	19.2
711.231	36.8	46.0	-9.2	34.9	3.6	32.3	10.5	20.1
731.019	35.8	46.0	-10.2	33.6	3.7	32.2	10.5	20.2
769.043	36.1	46.0	-9.9	33.7	3.8	32.2	10.5	20.3
775.833	38.2	46.0	-7.8	35.6	3.8	32.2	10.5	20.4
802.023	36.0	46.0	-10.0	32.7	3.8	32.1	10.5	21.1
1000.000	40.6	54.0	-13.4	34.0	4.2	30.8	10.5	22.8

Radiated Spurious Emissions 30 MHz - 1000 MHz (Vertical)

Frequency MHz	Peak FS dB(uV/m)	Limit@3m dB(uV/m)	Margin dB	RA dB(uV)	CF dB	AG dB	DCF dB	AF dB(1/m)
124.963	38.3	43.5	-5.2	46.8	1.2	32.0	10.5	11.8
164.830	34.8	43.5	-8.7	46.2	1.4	32.0	10.5	8.7
168.807	36.7	43.5	-6.8	47.5	1.4	32.0	10.5	9.3
185.103	38.0	43.5	-5.5	48.7	1.5	32.0	10.5	9.3
191.990	37.1	43.5	-6.4	47.6	1.5	32.0	10.5	9.5
203.145	34.5	43.5	-9.0	44.8	1.6	32.0	10.5	9.7
204.503	34.3	43.5	-9.2	44.5	1.6	32.0	10.5	9.8
207.025	36.1	43.5	-7.4	46.0	1.6	32.0	10.5	10.0
209.644	34.8	43.5	-8.7	44.5	1.6	32.0	10.5	10.2
210.808	34.8	43.5	-8.7	44.4	1.7	32.0	10.5	10.2
212.166	34.8	43.5	-8.7	44.3	1.7	32.0	10.5	10.3
213.427	34.9	43.5	-8.6	44.3	1.7	32.0	10.5	10.4
214.591	34.9	43.5	-8.6	44.2	1.7	32.0	10.5	10.5
217.307	34.9	46.0	-11.1	44.0	1.7	32.0	10.5	10.7
219.829	34.8	46.0	-11.2	43.8	1.7	32.0	10.5	10.8
222.351	35.4	46.0	-10.6	44.1	1.7	32.0	10.5	11.1
224.970	34.4	46.0	-11.6	42.8	1.8	32.0	10.5	11.3
226.134	34.2	46.0	-11.8	42.5	1.8	32.0	10.5	11.4
227.589	34.4	46.0	-11.6	42.6	1.8	32.0	10.5	11.6
230.014	33.7	46.0	-12.3	41.6	1.8	32.0	10.5	11.8
231.372	33.7	46.0	-12.3	41.5	1.8	32.0	10.5	11.9
235.155	34.3	46.0	-11.7	42.1	1.8	32.0	10.5	11.9
240.005	38.7	46.0	-7.3	46.3	1.9	32.0	10.5	12.0
256.883	33.7	46.0	-12.3	40.8	2.0	32.0	10.5	12.5
499.965	35.9	46.0	-10.1	37.2	2.9	32.1	10.5	17.3
527.998	35.5	46.0	-10.5	36.2	3.0	32.1	10.5	18.0
551.957	35.7	46.0	-10.3	36.6	3.0	32.1	10.5	17.8
705.411	37.2	46.0	-8.8	35.5	3.6	32.3	10.5	19.9
706.090	39.0	46.0	-7.0	37.3	3.6	32.3	10.5	19.9
802.023	36.6	46.0	-9.4	33.2	3.8	32.1	10.5	21.1
970.609	37.3	54.0	-16.7	31.2	4.1	31.0	10.5	22.6

Out-of-Band Radiated Spurious Emissions (Cabinet Radiation) - 1 GHz to 18 GHz

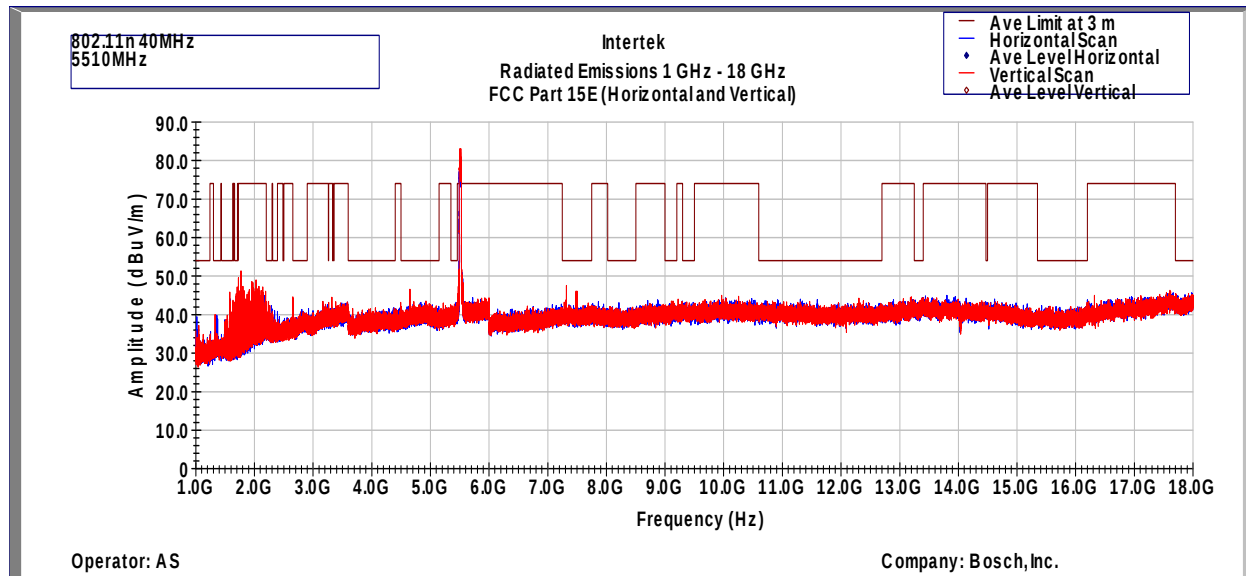

Note: Radiated emission measurements were performed up to 40GHz. No Emissions were identified when scanned from 18-40 GHz

Note: $FS@3m = RA + AF + CF - \text{Preamp, (Peak)}$

Corrected Peak Scans are under the Average Limit of 54.




Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11n 40MHz 5550MHz
Radiated Spurious Emissions 30 MHz - 1000 MHz (Horizontal)

Frequency	Peak FS	Limit@3m	Margin	RA	CF	AG	DCF	AF
MHz	dB(uV/m)	dB(uV/m)	dB	dB(uV)	dB	dB	dB	dB(1/m)
166.188	37.1	43.5	-6.4	48.3	1.4	32.0	10.5	8.9
172.687	35.7	43.5	-7.8	46.4	1.4	32.0	10.5	9.4
191.990	35.1	43.5	-8.4	45.6	1.5	32.0	10.5	9.5
193.930	35.8	43.5	-7.7	46.3	1.5	32.0	10.5	9.5
201.884	33.3	43.5	-10.2	43.6	1.6	32.0	10.5	9.6
249.996	40.8	46.0	-5.2	48.5	1.9	32.0	10.5	11.8
299.951	35.9	46.0	-10.1	41.8	2.3	32.0	10.5	13.3
311.979	36.9	46.0	-9.1	42.5	2.3	32.0	10.5	13.6
323.231	35.3	46.0	-10.7	40.5	2.4	32.0	10.5	13.9
387.930	33.9	46.0	-12.1	37.3	2.5	32.0	10.5	15.5
389.967	33.6	46.0	-12.4	37.0	2.5	32.0	10.5	15.5
420.037	35.8	46.0	-10.2	38.2	2.6	32.0	10.5	16.5
452.532	34.1	46.0	-11.9	35.9	2.7	32.0	10.5	17.0
479.983	36.3	46.0	-9.7	38.1	2.8	32.1	10.5	16.9
527.998	40.6	46.0	-5.4	41.3	3.0	32.1	10.5	18.0
540.026	38.9	46.0	-7.1	39.7	3.0	32.1	10.5	17.8
550.017	35.9	46.0	-10.1	36.8	3.0	32.1	10.5	17.7
599.972	38.6	46.0	-7.4	38.9	3.1	32.2	10.5	18.3
605.986	34.5	46.0	-11.5	34.7	3.1	32.2	10.5	18.4
624.028	34.2	46.0	-11.8	33.9	3.2	32.2	10.5	18.9
644.010	36.7	46.0	-9.3	35.8	3.3	32.2	10.5	19.3
647.987	36.2	46.0	-9.8	35.4	3.3	32.3	10.5	19.3
672.043	35.4	46.0	-10.6	34.6	3.4	32.3	10.5	19.2
706.963	36.7	46.0	-9.3	34.9	3.6	32.3	10.5	20.0
709.000	40.8	46.0	-5.2	38.9	3.6	32.3	10.5	20.0
712.589	37.9	46.0	-8.1	35.9	3.6	32.3	10.5	20.1
713.462	35.9	46.0	-10.1	33.9	3.6	32.3	10.5	20.1
731.019	36.1	46.0	-9.9	34.0	3.7	32.2	10.5	20.2
769.043	36.1	46.0	-9.9	33.8	3.8	32.2	10.5	20.3
1000.000	42.0	54.0	-12.0	35.3	4.2	30.8	10.5	22.8

Radiated Spurious Emissions 30 MHz - 1000 MHz (Vertical)

Frequency MHz	Peak FS dB(uV/m)	Limit@3m dB(uV/m)	Margin dB	RA dB(uV)	CF dB	AG dB	DCF dB	AF dB(1/m)
122.926	33.6	43.5	-9.9	42.0	1.2	32.0	10.5	11.9
124.963	37.6	43.5	-5.9	46.1	1.2	32.0	10.5	11.8
145.624	33.6	43.5	-9.9	45.4	1.3	32.0	10.5	8.4
164.830	35.5	43.5	-8.0	46.9	1.4	32.0	10.5	8.7
183.939	38.1	43.5	-5.4	48.8	1.5	32.0	10.5	9.3
191.990	37.9	43.5	-5.6	48.4	1.5	32.0	10.5	9.5
204.503	34.0	43.5	-9.5	44.1	1.6	32.0	10.5	9.8
205.667	34.5	43.5	-9.0	44.5	1.6	32.0	10.5	9.9
207.025	34.8	43.5	-8.7	44.7	1.6	32.0	10.5	10.0
208.286	34.2	43.5	-9.3	44.0	1.6	32.0	10.5	10.1
209.547	34.9	43.5	-8.6	44.6	1.6	32.0	10.5	10.2
210.808	34.0	43.5	-9.5	43.6	1.7	32.0	10.5	10.2
212.166	35.4	43.5	-8.1	44.9	1.7	32.0	10.5	10.3
213.427	35.3	43.5	-8.2	44.8	1.7	32.0	10.5	10.4
214.688	35.4	43.5	-8.1	44.7	1.7	32.0	10.5	10.5
217.210	35.1	46.0	-10.9	44.3	1.7	32.0	10.5	10.7
219.732	34.0	46.0	-12.0	43.0	1.7	32.0	10.5	10.8
220.993	35.8	46.0	-10.2	44.6	1.7	32.0	10.5	10.9
222.448	35.8	46.0	-10.2	44.4	1.7	32.0	10.5	11.1
224.970	34.9	46.0	-11.1	43.3	1.8	32.0	10.5	11.3
226.231	34.3	46.0	-11.7	42.5	1.8	32.0	10.5	11.5
227.492	34.2	46.0	-11.8	42.4	1.8	32.0	10.5	11.6
230.111	33.7	46.0	-12.3	41.6	1.8	32.0	10.5	11.8
240.005	38.5	46.0	-7.5	46.0	1.9	32.0	10.5	12.0
247.959	33.7	46.0	-12.3	41.3	1.9	32.0	10.5	11.9
255.622	33.6	46.0	-12.4	40.8	2.0	32.0	10.5	12.4
499.965	35.7	46.0	-10.3	37.0	2.9	32.1	10.5	17.3
527.998	35.7	46.0	-10.3	36.3	3.0	32.1	10.5	18.0
540.026	34.0	46.0	-12.0	34.8	3.0	32.1	10.5	17.8
552.054	35.2	46.0	-10.8	36.0	3.0	32.1	10.5	17.8
801.926	37.1	46.0	-8.9	33.8	3.8	32.1	10.5	21.1
986.614	37.4	54.0	-16.6	30.9	4.1	30.9	10.5	22.8

Out-of-Band Radiated Spurious Emissions (Cabinet Radiation) - 1 GHz to 18 GHz

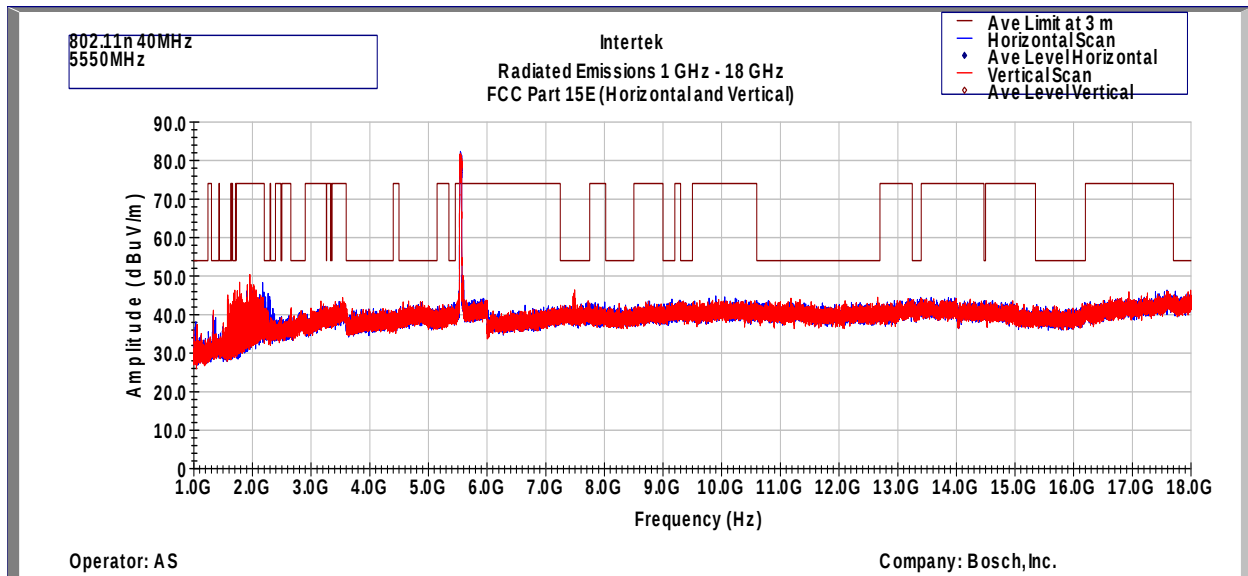

Note: Radiated emission measurements were performed up to 40GHz. No Emissions were identified when scanned from 18-40 GHz

Note: $FS@3m = RA + AF + CF - \text{Preamp, (Peak)}$

Corrected Peak Scans are under the Average Limit of 54.




Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11n 40MHz 5670MHz
Radiated Spurious Emissions 30 MHz - 1000 MHz (Horizontal)

Frequency	Peak FS	Limit@3m	Margin	RA	CF	AG	DCF	AF
MHz	dB(uV/m)	dB(uV/m)	dB	dB(uV)	dB	dB	dB	dB(1/m)
173.754	36.2	43.5	-7.3	46.9	1.4	32.0	10.5	9.3
191.990	34.6	43.5	-8.9	45.2	1.5	32.0	10.5	9.5
193.930	34.8	43.5	-8.7	45.3	1.5	32.0	10.5	9.5
201.884	33.9	43.5	-9.6	44.2	1.6	32.0	10.5	9.6
263.964	33.5	46.0	-12.5	40.1	2.0	32.0	10.5	12.8
299.951	35.5	46.0	-10.5	41.3	2.3	32.0	10.5	13.3
311.979	36.5	46.0	-9.5	42.0	2.3	32.0	10.5	13.6
323.231	36.5	46.0	-9.5	41.7	2.4	32.0	10.5	13.9
387.930	33.9	46.0	-12.1	37.4	2.5	32.0	10.5	15.5
389.967	33.6	46.0	-12.4	37.0	2.5	32.0	10.5	15.5
394.041	33.7	46.0	-12.3	37.0	2.6	32.0	10.5	15.7
420.037	36.3	46.0	-9.7	38.7	2.6	32.0	10.5	16.5
452.532	34.8	46.0	-11.2	36.6	2.7	32.0	10.5	17.0
479.983	35.4	46.0	-10.6	37.2	2.8	32.1	10.5	16.9
527.998	39.4	46.0	-6.6	40.0	3.0	32.1	10.5	18.0
540.026	38.4	46.0	-7.6	39.2	3.0	32.1	10.5	17.8
550.017	35.6	46.0	-10.4	36.5	3.0	32.1	10.5	17.7
600.069	39.0	46.0	-7.0	39.3	3.1	32.2	10.5	18.3
606.083	34.5	46.0	-11.5	34.7	3.1	32.2	10.5	18.4
624.028	34.9	46.0	-11.1	34.6	3.2	32.2	10.5	18.9
644.010	36.7	46.0	-9.3	35.8	3.3	32.2	10.5	19.3
648.084	35.8	46.0	-10.2	34.9	3.3	32.3	10.5	19.3
660.015	33.6	46.0	-12.4	32.6	3.4	32.3	10.5	19.3
672.043	35.3	46.0	-10.7	34.4	3.4	32.3	10.5	19.2
704.829	36.2	46.0	-9.8	34.5	3.6	32.3	10.5	19.9
712.880	40.9	46.0	-5.1	39.0	3.6	32.3	10.5	20.1
731.019	37.4	46.0	-8.6	35.2	3.7	32.2	10.5	20.2
769.043	37.0	46.0	-9.0	34.6	3.8	32.2	10.5	20.3
775.833	37.8	46.0	-8.2	35.3	3.8	32.2	10.5	20.4
981.085	38.4	54.0	-15.6	31.9	4.1	31.0	10.5	22.8
1000.000	41.9	54.0	-12.1	35.3	4.2	30.8	10.5	22.8

Radiated Spurious Emissions 30 MHz - 1000 MHz (Vertical)

Frequency	Peak FS	Limit@3m	Margin	RA	CF	AG	DCF	AF
MHz	dB(uV/m)	dB(uV/m)	dB	dB(uV)	dB	dB	dB	dB(1/m)
124.963	37.4	43.5	-6.1	45.9	1.2	32.0	10.5	11.8
166.770	35.9	43.5	-7.6	47.0	1.4	32.0	10.5	9.0
167.837	36.6	43.5	-6.9	47.5	1.4	32.0	10.5	9.2
169.680	37.3	43.5	-6.2	48.0	1.4	32.0	10.5	9.4
191.990	37.8	43.5	-5.7	48.3	1.5	32.0	10.5	9.5
201.981	33.7	43.5	-9.8	44.1	1.6	32.0	10.5	9.6
204.406	34.8	43.5	-8.7	44.9	1.6	32.0	10.5	9.8
205.764	33.8	43.5	-9.7	43.8	1.6	32.0	10.5	9.9
207.025	34.7	43.5	-8.8	44.6	1.6	32.0	10.5	10.0
208.383	34.3	43.5	-9.2	44.1	1.6	32.0	10.5	10.1
209.547	35.9	43.5	-7.6	m	1.6	32.0	10.5	10.2
210.808	33.2	43.5	-10.3	42.8	1.7	32.0	10.5	10.2
212.069	35.7	43.5	-7.8	45.2	1.7	32.0	10.5	10.3
213.427	36.5	43.5	-7.0	45.9	1.7	32.0	10.5	10.4
214.688	35.3	43.5	-8.2	44.6	1.7	32.0	10.5	10.5
217.210	34.6	46.0	-11.4	43.7	1.7	32.0	10.5	10.7
219.829	33.8	46.0	-12.2	42.7	1.7	32.0	10.5	10.8
222.448	34.8	46.0	-11.2	43.5	1.7	32.0	10.5	11.1
226.231	33.6	46.0	-12.4	41.9	1.8	32.0	10.5	11.5
227.492	33.7	46.0	-12.3	41.8	1.8	32.0	10.5	11.6
230.014	33.4	46.0	-12.6	41.3	1.8	32.0	10.5	11.8
231.275	33.8	46.0	-12.2	41.6	1.8	32.0	10.5	11.9
232.633	33.4	46.0	-12.6	41.2	1.8	32.0	10.5	11.9
240.005	38.7	46.0	-7.3	46.3	1.9	32.0	10.5	12.0
253.100	33.7	46.0	-12.3	41.1	2.0	32.0	10.5	12.1
255.622	33.3	46.0	-12.7	40.4	2.0	32.0	10.5	12.4
256.883	33.5	46.0	-12.5	40.6	2.0	32.0	10.5	12.5
499.965	35.7	46.0	-10.3	37.1	2.9	32.1	10.5	17.3
527.998	35.4	46.0	-10.6	36.1	3.0	32.1	10.5	18.0
551.957	34.6	46.0	-11.4	35.5	3.0	32.1	10.5	17.8
624.998	37.6	46.0	-8.4	37.2	3.2	32.2	10.5	18.9
802.023	36.4	46.0	-9.6	33.1	3.8	32.1	10.5	21.1
989.815	37.9	54.0	-16.1	31.2	4.1	30.9	10.5	22.9

Out-of-Band Radiated Spurious Emissions (Cabinet Radiation) - 1 GHz to 18 GHz

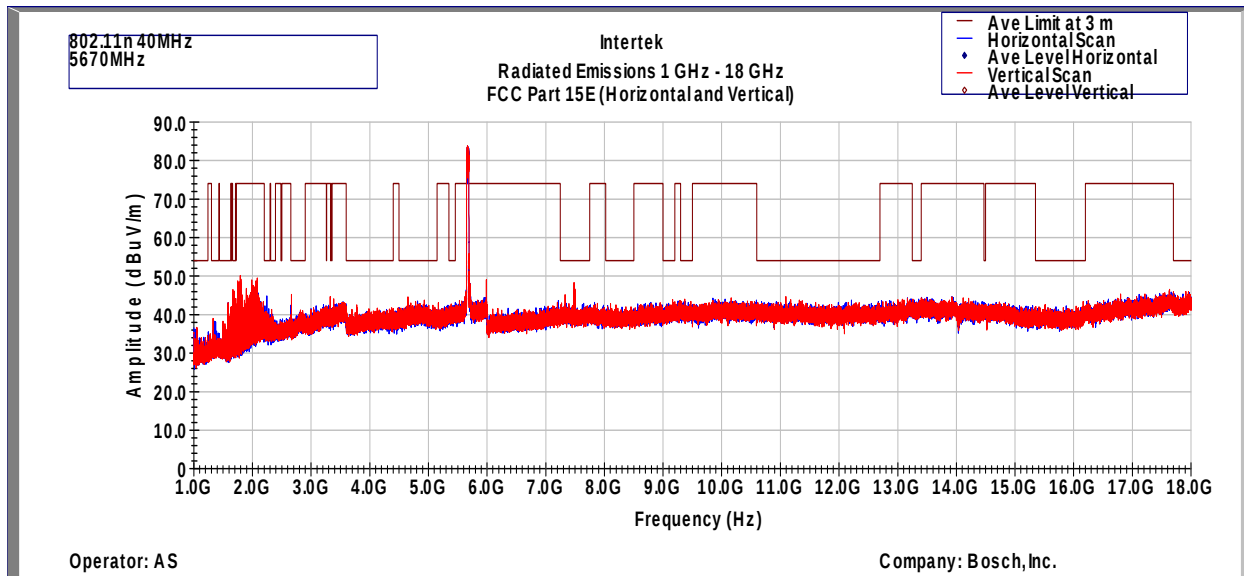

Note: Radiated emission measurements were performed up to 40GHz. No Emissions were identified when scanned from 18-40 GHz

Note: $FS@3m = RA + AF + CF - \text{Preamp, (Peak)}$

Corrected Peak Scans are under the Average Limit of 54.



Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11ac 80MHz 5530MHz

Radiated Spurious Emissions 30 MHz - 1000 MHz (Horizontal)


Frequency	Peak FS	Limit@3m	Margin	RA	CF	AG	DCF	AF
MHz	dB(uV/m)	dB(uV/m)	dB	dB(uV)	dB	dB	dB	dB(1/m)
170.747	35.8	43.5	-7.7	46.5	1.4	32.0	10.5	9.4
191.990	34.9	43.5	-8.6	45.4	1.5	32.0	10.5	9.5
193.930	35.8	43.5	-7.7	46.3	1.5	32.0	10.5	9.5
198.004	34.2	43.5	-9.3	44.7	1.6	32.0	10.5	9.4
204.406	34.1	43.5	-9.4	44.2	1.6	32.0	10.5	9.8
249.996	40.5	46.0	-5.5	48.3	1.9	32.0	10.5	11.8
299.951	35.9	46.0	-10.1	41.8	2.3	32.0	10.5	13.3
311.979	37.7	46.0	-8.3	43.3	2.3	32.0	10.5	13.6
323.231	37.1	46.0	-8.9	42.3	2.4	32.0	10.5	13.9
387.930	33.6	46.0	-12.4	37.1	2.5	32.0	10.5	15.5
389.967	35.0	46.0	-11.0	38.4	2.5	32.0	10.5	15.5
394.041	33.8	46.0	-12.2	37.1	2.6	32.0	10.5	15.7
420.037	35.3	46.0	-10.7	37.7	2.6	32.0	10.5	16.5
452.629	35.3	46.0	-10.7	37.1	2.7	32.0	10.5	17.0
479.983	34.8	46.0	-11.2	36.6	2.8	32.1	10.5	16.9
527.998	39.6	46.0	-6.4	40.3	3.0	32.1	10.5	18.0
540.026	38.5	46.0	-7.5	39.3	3.0	32.1	10.5	17.8
550.017	34.1	46.0	-11.9	35.1	3.0	32.1	10.5	17.7
554.091	33.6	46.0	-12.4	34.4	3.0	32.1	10.5	17.8
557.195	34.3	46.0	-11.7	35.0	3.0	32.2	10.5	18.0
600.069	38.9	46.0	-7.1	39.2	3.1	32.2	10.5	18.3
624.028	34.8	46.0	-11.2	34.5	3.2	32.2	10.5	18.9
644.010	36.3	46.0	-9.7	35.4	3.3	32.2	10.5	19.3
647.987	35.5	46.0	-10.5	34.6	3.3	32.3	10.5	19.3
672.043	34.4	46.0	-11.6	33.6	3.4	32.3	10.5	19.2
711.231	36.9	46.0	-9.1	35.0	3.6	32.3	10.5	20.1
720.058	34.9	46.0	-11.1	32.8	3.6	32.3	10.5	20.2
731.019	36.1	46.0	-9.9	34.0	3.7	32.2	10.5	20.2
769.043	36.3	46.0	-9.7	33.9	3.8	32.2	10.5	20.3
802.023	36.5	46.0	-9.5	33.2	3.8	32.1	10.5	21.1
1000.000	41.0	54.0	-13.0	34.3	4.2	30.8	10.5	22.8

Radiated Spurious Emissions 30 MHz - 1000 MHz (Vertical)

Frequency MHz	Peak FS dB(uV/m)	Limit@3m dB(uV/m)	Margin dB	RA dB(uV)	CF dB	AG dB	DCF dB	AF dB(1/m)
92.468	33.6	43.5	-9.9	45.3	1.0	32.1	10.5	8.7
123.896	34.4	43.5	-9.1	42.9	1.2	32.0	10.5	11.9
124.963	37.9	43.5	-5.6	46.4	1.2	32.0	10.5	11.8
141.162	33.3	43.5	-10.2	44.6	1.3	32.0	10.5	9.0
164.830	34.7	43.5	-8.8	46.1	1.4	32.0	10.5	8.7
169.680	35.6	43.5	-7.9	46.3	1.4	32.0	10.5	9.4
181.417	38.2	43.5	-5.3	49.0	1.5	32.0	10.5	9.2
204.503	33.6	43.5	-9.9	43.7	1.6	32.0	10.5	9.8
205.764	33.9	43.5	-9.6	43.9	1.6	32.0	10.5	9.9
207.025	34.6	43.5	-8.9	44.5	1.6	32.0	10.5	10.0
209.547	33.9	43.5	-9.6	43.6	1.6	32.0	10.5	10.2
210.808	35.2	43.5	-8.3	44.8	1.7	32.0	10.5	10.2
212.166	34.8	43.5	-8.7	44.3	1.7	32.0	10.5	10.3
213.330	34.2	43.5	-9.3	43.6	1.7	32.0	10.5	10.4
214.785	34.8	43.5	-8.7	44.1	1.7	32.0	10.5	10.5
217.210	34.6	46.0	-11.4	43.8	1.7	32.0	10.5	10.7
219.829	33.5	46.0	-12.5	42.4	1.7	32.0	10.5	10.8
220.993	33.2	46.0	-12.8	42.0	1.7	32.0	10.5	10.9
222.448	35.4	46.0	-10.6	44.1	1.7	32.0	10.5	11.1
223.612	33.5	46.0	-12.5	42.1	1.7	32.0	10.5	11.2
224.873	33.8	46.0	-12.2	42.3	1.8	32.0	10.5	11.3
226.134	33.3	46.0	-12.7	41.6	1.8	32.0	10.5	11.4
227.492	34.2	46.0	-11.8	42.4	1.8	32.0	10.5	11.6
228.753	34.0	46.0	-12.0	42.0	1.8	32.0	10.5	11.7
230.014	34.2	46.0	-11.8	42.1	1.8	32.0	10.5	11.8
232.536	33.9	46.0	-12.1	41.7	1.8	32.0	10.5	11.9
235.155	34.1	46.0	-11.9	41.8	1.8	32.0	10.5	11.9
240.005	38.4	46.0	-7.6	46.0	1.9	32.0	10.5	12.0
499.965	35.9	46.0	-10.1	37.2	2.9	32.1	10.5	17.3
527.998	36.6	46.0	-9.4	37.2	3.0	32.1	10.5	18.0
551.957	36.2	46.0	-9.8	37.1	3.0	32.1	10.5	17.8
801.926	36.2	46.0	-9.8	32.8	3.8	32.1	10.5	21.1
982.249	37.2	54.0	-16.8	30.7	4.1	30.9	10.5	22.8



Out-of-Band Radiated Spurious Emissions (Cabinet Radiation) - 1 GHz to 18 GHz

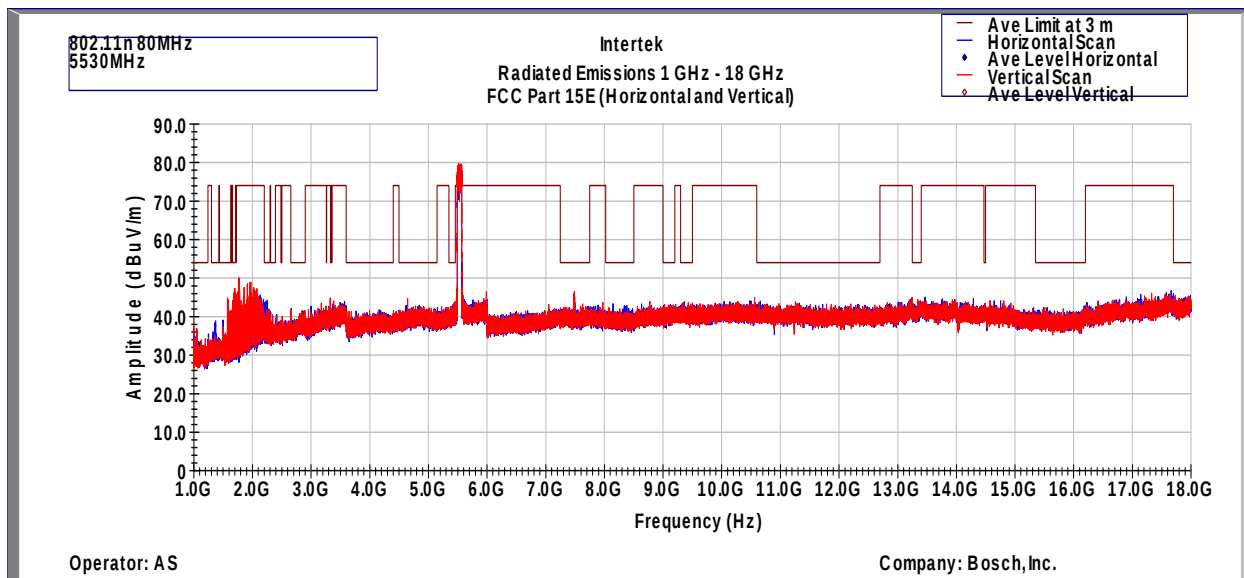


Note: Radiated emission measurements were performed up to 40GHz. No Emissions were identified when scanned from 18-40 GHz

Note: $FS@3m = RA + AF + CF - \text{Preamp, (Peak)}$

Corrected Peak Scans are under the Average Limit of 54.

4.5.8 Test setup photographs

The following photographs show the testing configurations used.

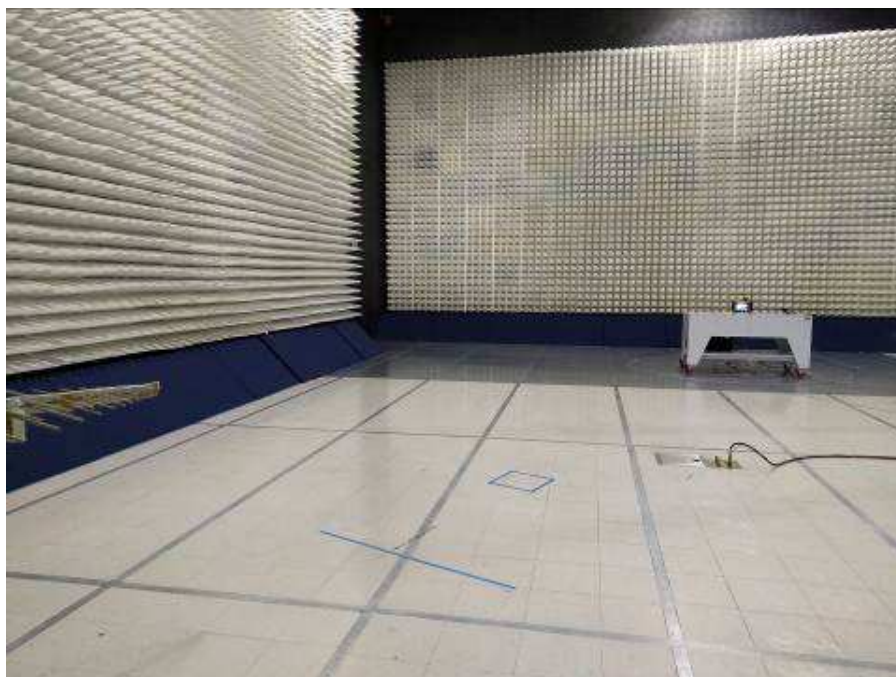

4.5.8 Test Setup Photographs



4.5.8 Test Setup Photographs





4.6 Dynamic Frequency Selection (DFS)

4.6.1 Requirement

Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
<i>Non-Occupancy Period</i>	Yes	Not Required	Yes
<i>DFS Detection Threshold</i>	Yes	Not Required	Yes
<i>Channel Availability Check Time</i>	Yes	Not Required	Not Required
<i>U-NII Detection Bandwidth</i>	Yes	Not Required	Yes

Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client With Radar Detection
<i>DFS Detection Threshold</i>	Yes	Not Required
<i>Channel Closing Transmission Time</i>	Yes	Yes
<i>Channel Move Time</i>	Yes	Yes
<i>U-NII Detection Bandwidth</i>	Yes	Not Required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
<i>U-NII Detection Bandwidth and Statistical Performance Check</i>	All BW modes must be tested	Not required
<i>Channel Move Time and Channel Closing Transmission Time</i>	Test using widest BW mode available	Test using the widest BW mode available for the link
<i>All other tests</i>	Any single BW mode	Not required
Note: Frequencies selected for statistical performance check should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		



4.6.1.1 DFS Detection Thresholds for Master or Client Devices with DFS Detection

Maximum Transmit Power	Values (See Notes 1, 2, and 3)
<i>EIRP $\geq$ 200 milliwatt</i>	-64 dBm
<i>EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz</i>	-62 dBm
<i>EIRP < 200 milliwatt that do not meet the power spectral density requirement</i>	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01	

Parameter	Value
<i>Non-Occupancy Period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 Seconds
<i>Channel Move Time</i>	10 seconds (see note 1)
<i>Channel Closing Transmission Time</i>	200 ms + an aggregate of 60 ms over remaining 10 Second period. (see note 1 and 2)
<i>U-NII Detection Bandwidth</i>	Minimum 100% of the U-NII 99% transmission power bandwidth. (see note 3)
Note 1: <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel</i> move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	



4.6.1.2 Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	$\text{Roundup} \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60.00%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Burst	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30


Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

4.6.2 Procedure

DFS Waveform Calibration

Calibration Procedure

For the DFS signal, horn antenna was attached to a signal generator (RS SMU700A). On the Receive side another horn antenna was attached to a spectrum analyzer with a preamp inline. The spectrum analyzer's resolution bandwidth was set to 3 MHz and the video bandwidth was set to 3 MHz with peak detection. The field was corrected to account for cable loss, antenna gain and preamp. The DFS signal was calibrated to a field strength of -63 dBm. Test wave form 0 was utilized. The calibration setup is diagrammed below along with a setup picture.

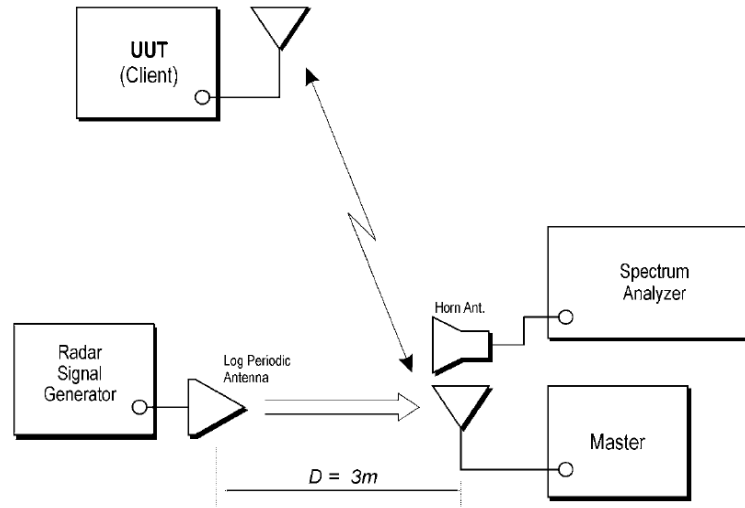


Tested By:	Anderson Soungpanya
Test Date:	January 12, 2016





Radar Type 0 Calibration 5530MHz

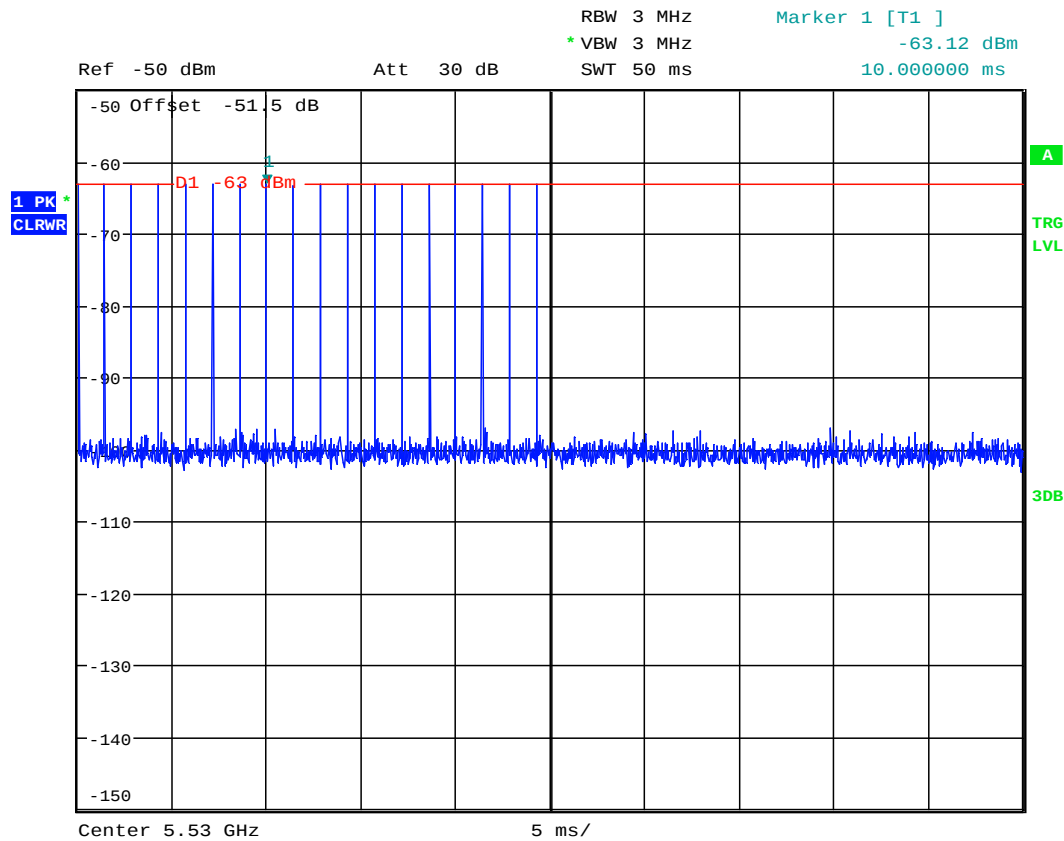

Date: 12.JAN.2016 06:48:56

The Spectrum Analyzer Reference Level Offset is System Gain + Cable Loss

Frequency	Cable loss	System Gain (Preamp and Antenna Gain)	Reference Offset
MHz	dB	dB	dB
5290	3.1	-55.5	-52.4
5530	3.7	-55.2	-51.5




DFS Setup & Procedure

Test Procedure

A radiated test method was used and the test setup was made as depicted in the diagram below. DFS testing was setup as a client with injection into the master.

The diagram below depicts the setup of the EUT along with associated support equipment.

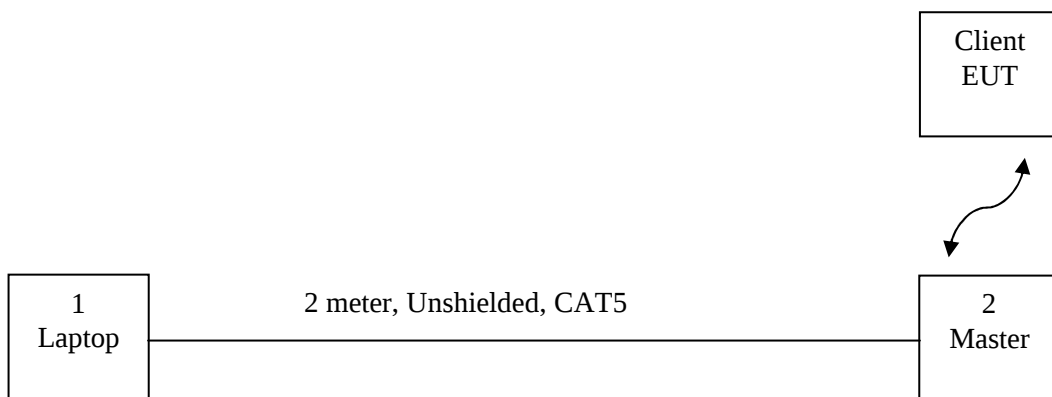

Item	Description	Model	Serial
1	HP Laptop	EliteBook 8460p	CNU14429SL
2	Ruckus Wireless, Inc.	R710 Access Point FCC ID: S9GR710	421503700725



Test Procedure Continued

The Master and Client (EUT) were placed in a semi-anechoic chamber. The simulated radar waveform was transmitted from a horn antenna towards the Master. The signal level of the simulated radar waveform was set 10 dB higher than calibrated level to -53 dBm and was applied to the Master. The horn antenna was connected to the spectrum analyzer and positioned towards the client with the level >10 dB higher than emissions from the Master.

A Rhode & Schwarz Vector Signal Generator with Pulse Sequencer Software was used to generate the DFS radar signals. A Rhode & Schwarz Spectrum Analyzer was used to monitor the transmissions of the Client. The trigger of the spectrum analyzer was aligned with the end of the radar waveform burst from the signal generator.

Channel closing transmission time and channel move time were measured by applying a radar signal to the Master device. The EUT transmissions were observed while Type 0 Radar waveforms were applied. The time between the end of the applied radar waveform and the final transmission on the channel is the channel move time. The channel closing transmission time comprises only those fragments of the channel move time during which the EUT transmits.

The EUT (client without DFS detection) was configured to communicate with a Master wirelessly. The test file/data was streamed from the Master to the Client. The channel load is recorded and presented in test results below.




4.6.3 Test Results

Channel Move Time Test Summary							
Description	Plot #	Radar Type	Frequency MHz	Measured Value	Limit Requirements	Results	
Channel Move Time	1	0	5530	300.0ms	10s	Pass	
Channel Closing Transmission Time Test Summary							
Description	Plot #	Radar Type	Frequency MHz	Aggregate Measured Value	Limit Requirements	Results	
Channel Closing Transmission Time	2	0	5530	< 260ms	260ms	Pass	
Unoccupancy Time Test Summary							
Description	Plot #	Radar Type	Frequency MHz	Number of Beacons Observed	Measured Value	Minimum Requirement	Results
Channel Move Time	3	0	5530	0	> 30 min	30 min	Pass



Plot 1


Channel Move Time (CMT), Radar Type 1 @ 5320 MHz

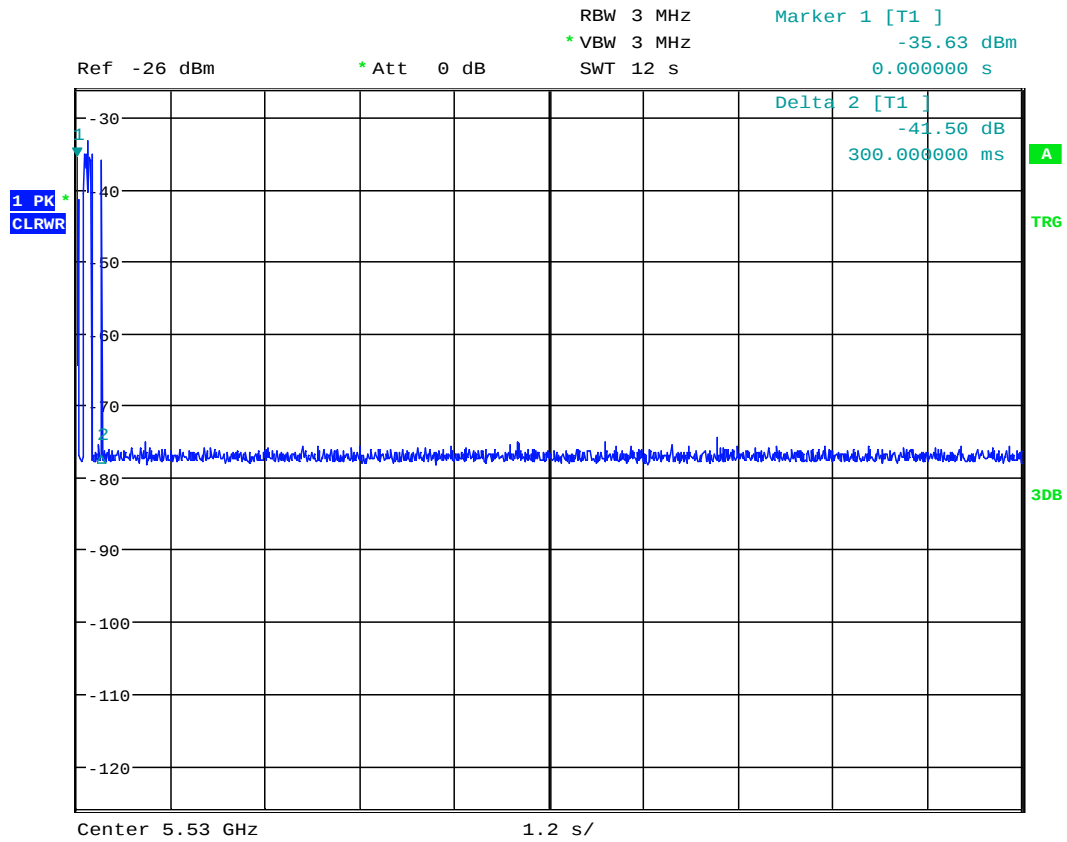

Date: 12.JAN.2016 09:20:54

Plot 2

Channel Closing Transmission Time (CCTT), Radar Type 1 @ 5530 MHz

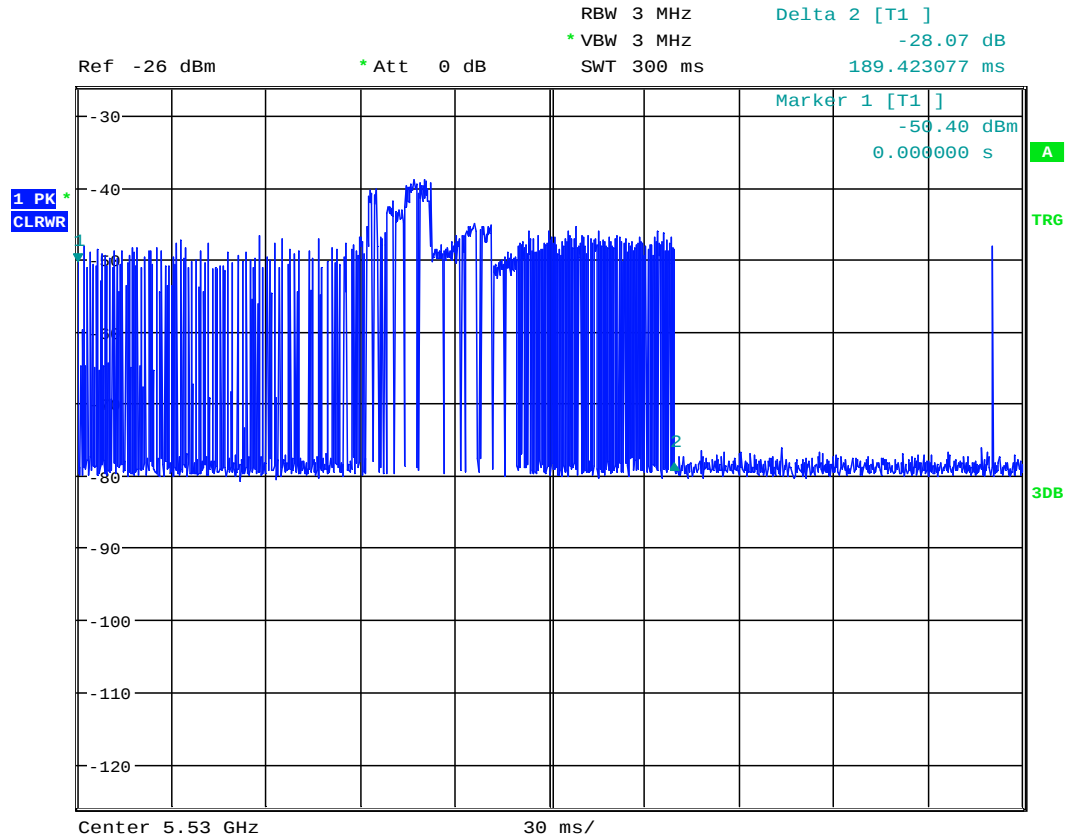


Date: 12.JAN.2016 09:24:46



Plot 3

Channel Un-occupancy Time (CCTT), Radar Type 1 @ 5530 MHz

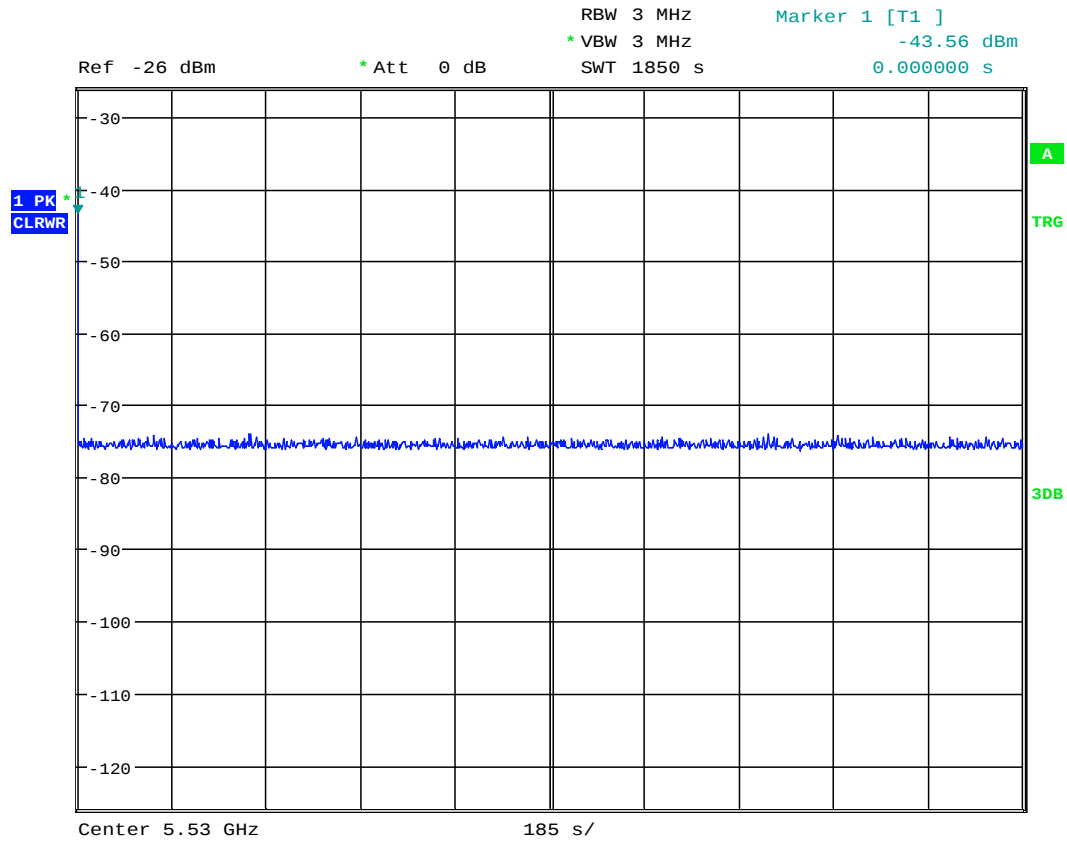


Date: 12.JAN.2016 10:13:55




Plot 4

Channel Loading 5530MHz

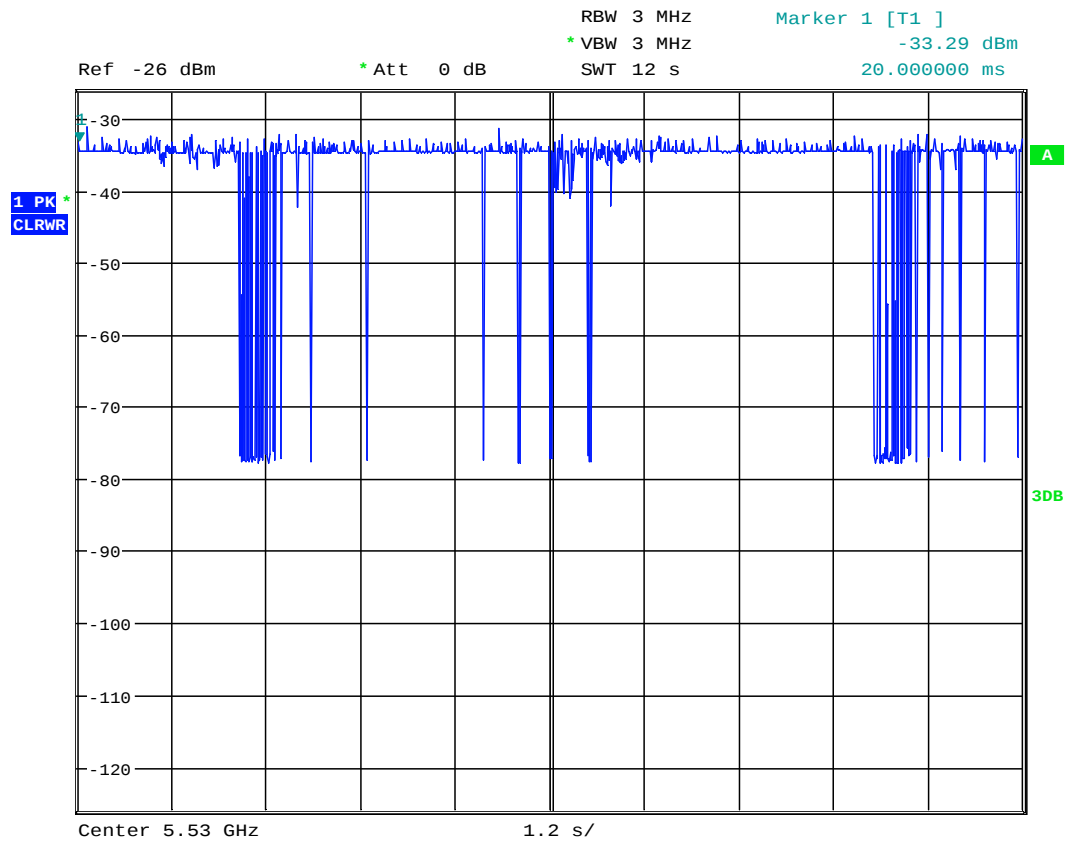

Date: 12.JAN.2016 08:17:04

4.6.4 Test Setup Picture

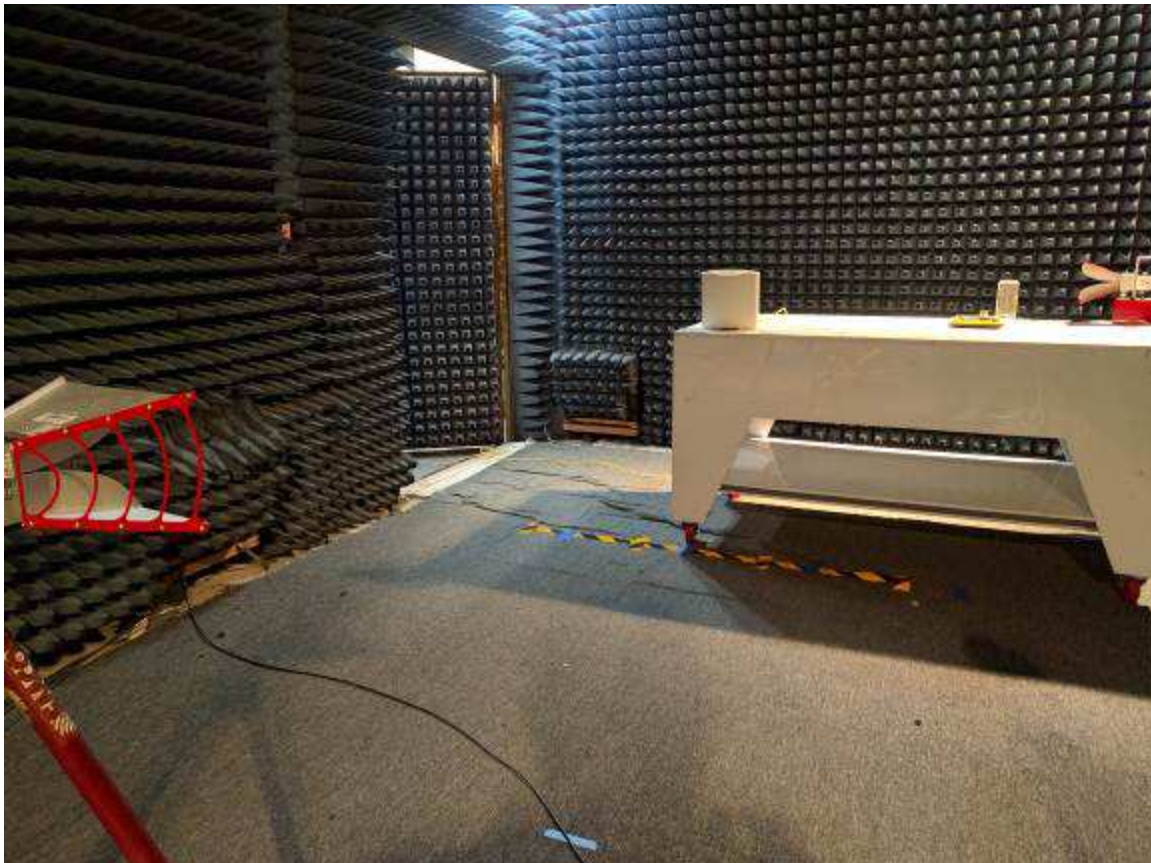



5.0 List of Test Equipment

Measurement equipment used for emission compliance testing utilized the equipment on the following list:

Equipment	Manufacturer	Model/Type	Asset #	Cal Int	Cal Due
EMI Receiver	Rohde and Schwarz	ESU	ITS 00961	12	06/02/16
Spectrum Analyzer	Rohde and Schwarz	FSP	ITS 01200	12	02/09/16
BI-Log Antenna	Antenna Research	LPB-2513	ITS 00355	12	08/11/16
Pyramidal Horn Antenna	EMCO	3160-09	ITS 00571	#	#
Pyramidal Horn Antenna	EMCO	3160-10	ITS 00572	#	#
Pre-Amplifier	Sonoma Instrument	310	ITS 00942	12	01/15/16
Pre-Amplifier (1-18GHz)	Miteq	AMF-4D-001180-24-10P	ITS 00526	12	10/06/16
Pre-Amplifier (18-40GHz)	Miteq	JSD44-18004000-305P	ITS 00921	12	06/18/16
Horn Antenna	EMCO	3115	ITS 01595	12	01/14/16
Horn Antenna	EMCO	3117-PA	ITS 01365	12	10/15/16
Horn Antenna	ETS Lindgren	3115	ITS 00982	12	12/16/16

No Calibration required



6.0 Document History

Revision/ Job Number	Writer Initials	Reviewer Initials	Date	Change
1.0 / G102241369	AS	KV	February 04, 2016	Original document