

# **FCC TEST REPORT**

## **FCC ID: 2AHMO32760**

Product : Wireless Remote Control LED Light

Model Name : 32760

Brand : N/A

Report No. : PT800024160105E-FC01

### **Prepared for**

The NCC NY LLC  
140 58th Street, Suite 6W, Brooklyn,  
NY 11220, USA

### **Prepared by**

DongGuan Precise Testing Service Co.,Ltd.  
Building D, Baoding Technology Park, Guangming Road 2, Guangming Community  
Dongcheng District, Dongguan, Guangdong, China



**TEST RESULT CERTIFICATION**

Applicant's name : The NCC NY LLC  
Address : 140 58th Street, Suite 6W, Brooklyn, NY 11220, USA  
Manufacture's name : NINGBO SHENGYE ELECTRIC APPLIANCE CO.,LTD  
Address : North Guangming Road, Simen Town, Yuyao City, Zhejiang, China  
Product name : Wireless Remote Control LED Light  
Model name : 32760  
Standards : FCC CFR47 Part 15 Section 15.231  
Test procedure : ANSI C63.10:2013  
Test Date : Jan. 31, 2016 - Mar. 21, 2016  
Date of Issue : Mar. 22, 2016  
Test Result : Pass

This device described above has been tested by PTS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTS, this document may be altered or revised by PTS, personal only, and shall be noted in the revision of the document.

Testing Engineer

August Qiu

Technical Manager

Hack Ye

Authorized Signatory

Chris Du



# Contents

	<b>Page</b>
<b>2 TEST SUMMARY.....</b>	<b>4</b>
<b>3 GENERAL INFORMATION.....</b>	<b>5</b>
3.1 GENERAL DESCRIPTION OF E.U.T.....	5
3.2 TEST MODE.....	5
<b>4 EQUIPMENT DURING TEST .....</b>	<b>6</b>
4.1 EQUIPMENTS LIST.....	6
4.2 MEASUREMENT UNCERTAINTY.....	6
<b>5 CONDUCTED EMISSION.....</b>	<b>7</b>
<b>6 PERIODIC OPERATION.....</b>	<b>8</b>
<b>7 RADIATED SPURIOUS EMISSIONS .....</b>	<b>12</b>
7.1 EUT OPERATION .....	12
7.2 TEST SETUP.....	13
7.3 SPECTRUM ANALYZER SETUP.....	14
7.4 TEST PROCEDURE.....	15
7.5 SUMMARY OF TEST RESULTS.....	16
<b>8 20DB BANDWIDTH MEASUREMENT.....</b>	<b>18</b>
8.1 TEST PROCEDURE.....	18
8.2 TEST RESULT.....	18
<b>9 ANTENNA REQUIREMENT.....</b>	<b>19</b>



## 2 Test Summary

Test Items	Test Requirement	Result
Conducted Emissions	15.207	N/A
Radiated Emission	15.231(a) 15.209 15.205(a)	PASS
Periodic Operation	15.35(c)	PASS
20dB Bandwidth	15:215(c)	PASS
Antenna Requirement	15.203	PASS

Remark:

N/A: Not Applicable



### 3 General Information

#### 3.1 General Description of E.U.T.

Product Name : Wireless Remote Control LED Light  
Model Name : 32760  
Model Description : N/A  
Operation Frequency: : 315MHz  
Antenna installation: : Integrated Antenna  
Antenna Gain: : 0dBi  
Type of Modulation : ASK  
The lowest oscillator : 315MHz  
Power supply : DC 12V power by battery

#### 3.2 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Modulation	Test mode	Low channel	Middle channel	High channel
ASK	continuously Transmitting	315MHz	\	\



## 4 Equipment During Test

### 4.1 Equipments List

Radiated Emissions							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 15, 2015	July 14, 2016	1 year
2	EMC Analyzer (9k~26.5GHz)	Agilent	E4407B	MY45109572	Aug.04, 2015	Aug.03, 2016	1 year
3	Trilog Broadband Antenna	SCHWARZECK	VULB9160	9160-3355	July 15, 2015	July 14, 2016	1 year
4	Amplifier	EM	EM-30180	060538	July 15, 2015	July 14, 2016	1 year
5	Horn Antenna	SCHWARZECK	BBHA9120D	9120D-1246	July 15, 2015	July 14, 2016	1 year
6	Coaxial Cable(below 1GHz)	LARGE	CALB1	-	July 15, 2015	July 14, 2016	1 year
7	Coaxial Cable(above 1GHz)	LARGE	CALB2	-	July 15, 2015	July 14, 2016	1 year

### 4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 <sup>-6</sup>
Bandwidth	± 1.5 x 10 <sup>-6</sup>
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB



## 5 Conducted Emission

Test Requirement:	:	FCC CFR 47 Part 15 Section 15.207
Test Method:	:	ANSI C63.10:2013
Frequency Range:	:	150kHz to 30MHz
Class/Severity:	:	Class B
Limit:	:	66-56 dB $\mu$ V between 0.15MHz & 0.5MHz
	:	56 dB $\mu$ V between 0.5MHz & 5MHz
	:	60 dB $\mu$ V between 5MHz & 30MHz
Detector:	:	Peak for pre-scan (9kHz Resolution Bandwidth)
Test Result:	:	The device is powered by battery, this test is not applicable

## 6 Periodic Operation

The duty cycle was determined by the following equation:

To calculate the actual field intensity, the duty cycle correction factor in decibel is needed for later use and can be obtained from following conversion

Duty Cycle(%)=Total On interval in a complete pulse train/ Length of a complete pulse train \* %

Duty Cycle Correction Factor (dB)=20 \* Log<sub>10</sub>(Duty Cycle(%))

Total transmission time(ms)	0.92*12+0.32*21=17.76
Length of a complete transmission period(ms)	49.6
Duty Cycle(%)	35.80
Duty Cycle Correction Factor(dB)	-8.92
Pulse Desensitization Correction Factor	
Pulse Width(PW)=17.76ms 2/PW=2/17.76ms=0.1126kHz; RBW(100kHz)>2/PW (0.1126kHz); Therefore PDCF is not needed.	


Refer to the duty cycle plot (as below),This device meets the FCC requirement.

Length of a complete pulse train:


Remark: FCC part15.35(c) required that a complete pulse train is more than 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.



Period 1

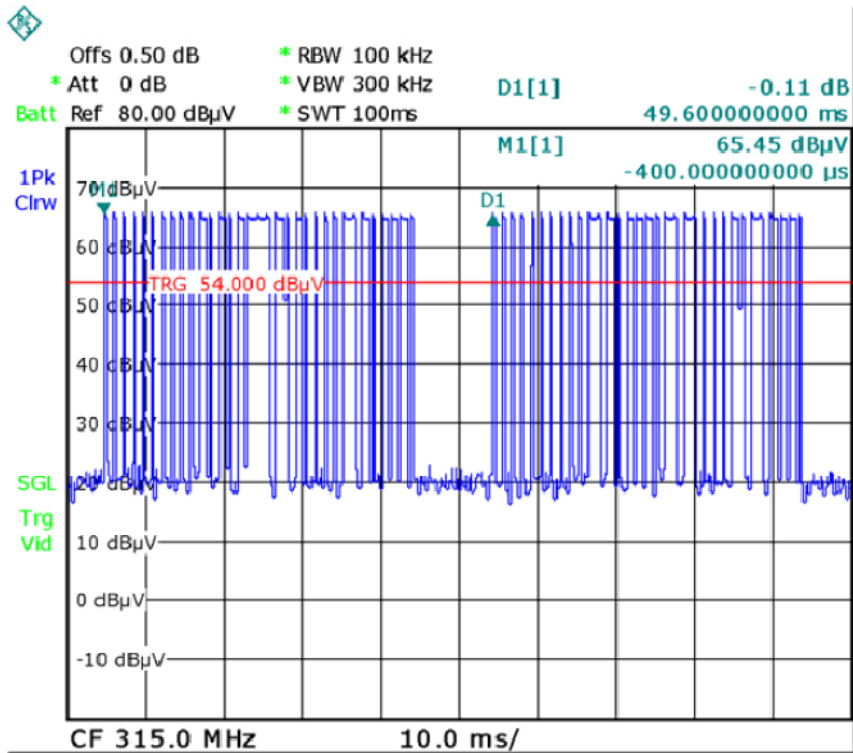


Period 2

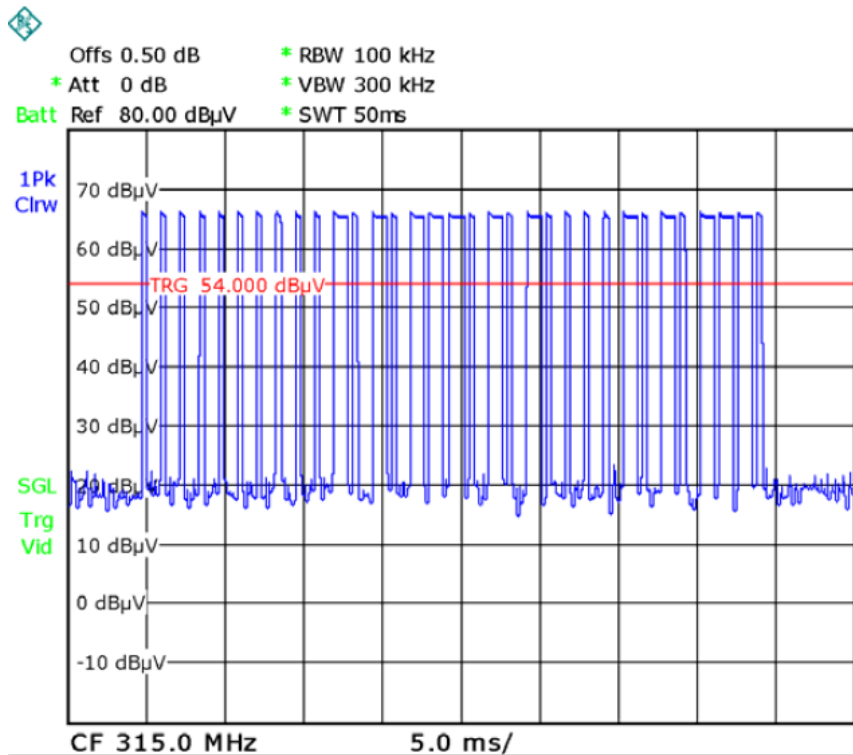




Long pulses

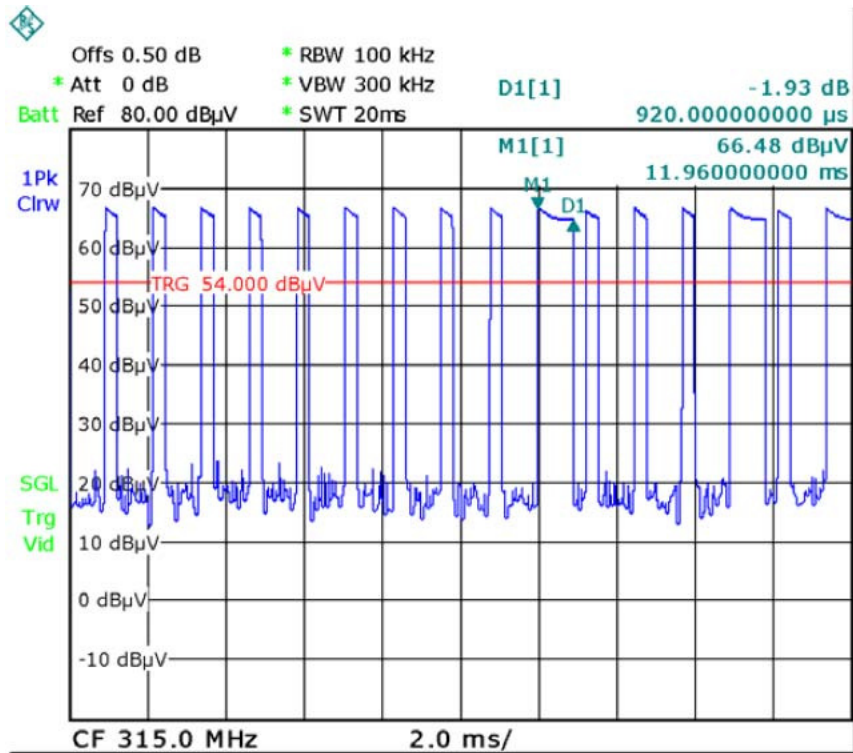


Short pulses

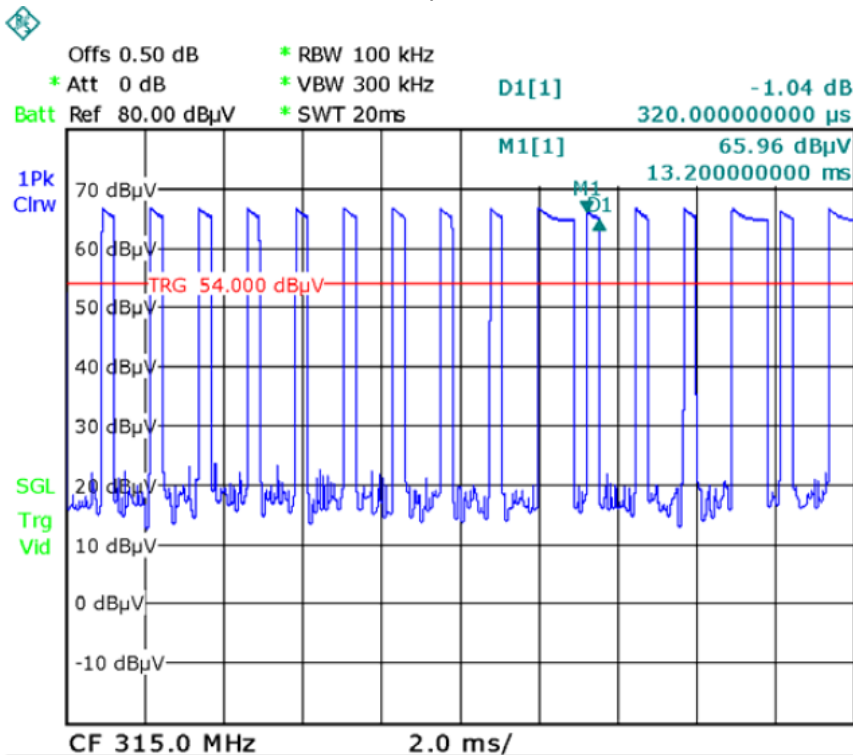

FCC Part15.231 (a) (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

(2)A transmitter activated automatically shall cease transmission within 5 seconds after activation.

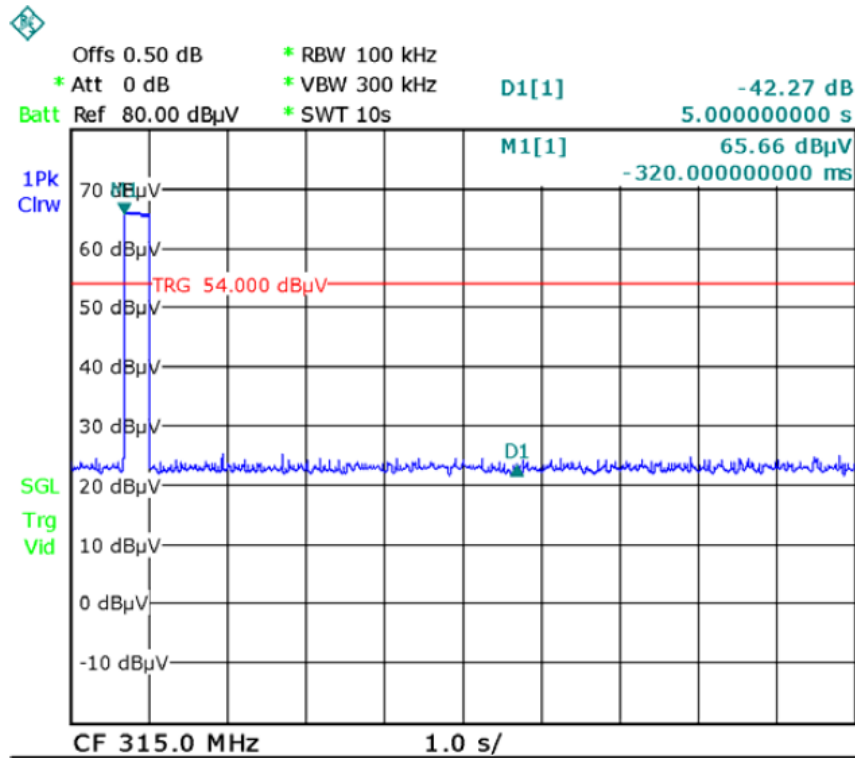



### 7 Radiated Spurious Emissions

Test Requirement: : FCC CFR47 Part 15 Section 15.231 & 15.207 & 15.205  
 Test Method: : ANSI C63.10:2013  
 Test Result: : PASS  
 Measurement Distance: : 3m  
 Limit: : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log <sup>(2400/F(kHz))</sup> + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log <sup>(24000/F(kHz))</sup> + 40
1.705 ~ 30	30	30	100 * 30	20log <sup>(30)</sup> + 40
30 ~ 88	100	3	100	20log <sup>(100)</sup>
88 ~ 216	150	3	150	20log <sup>(150)</sup>
216 ~ 960	200	3	200	20log <sup>(200)</sup>
Above 960	500	3	500	20log <sup>(500)</sup>


#### 7.1 EUT Operation

Operating Environment :  
 Temperature: : 23.5 °C  
 Humidity: : 51.1 % RH  
 Atmospheric Pressure: : 101.2kPa  
 EUT Operation : : Refer to section 3.3


### 7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz.

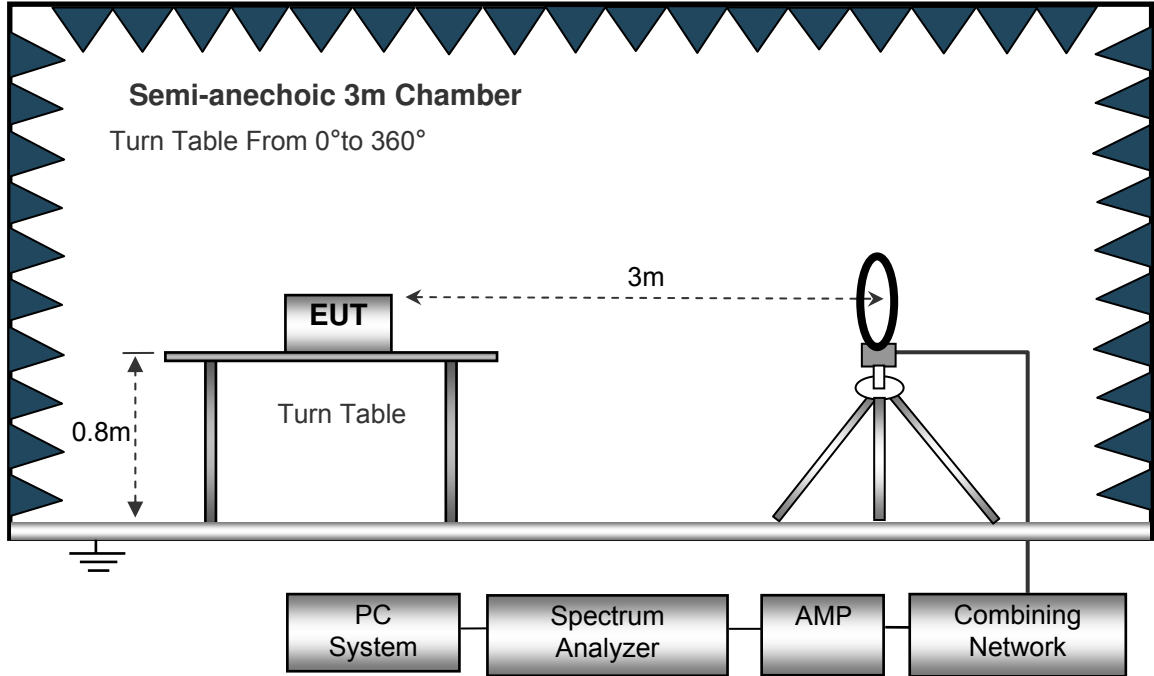

The test setup for emission measurement from 30 MHz to 1 GHz.

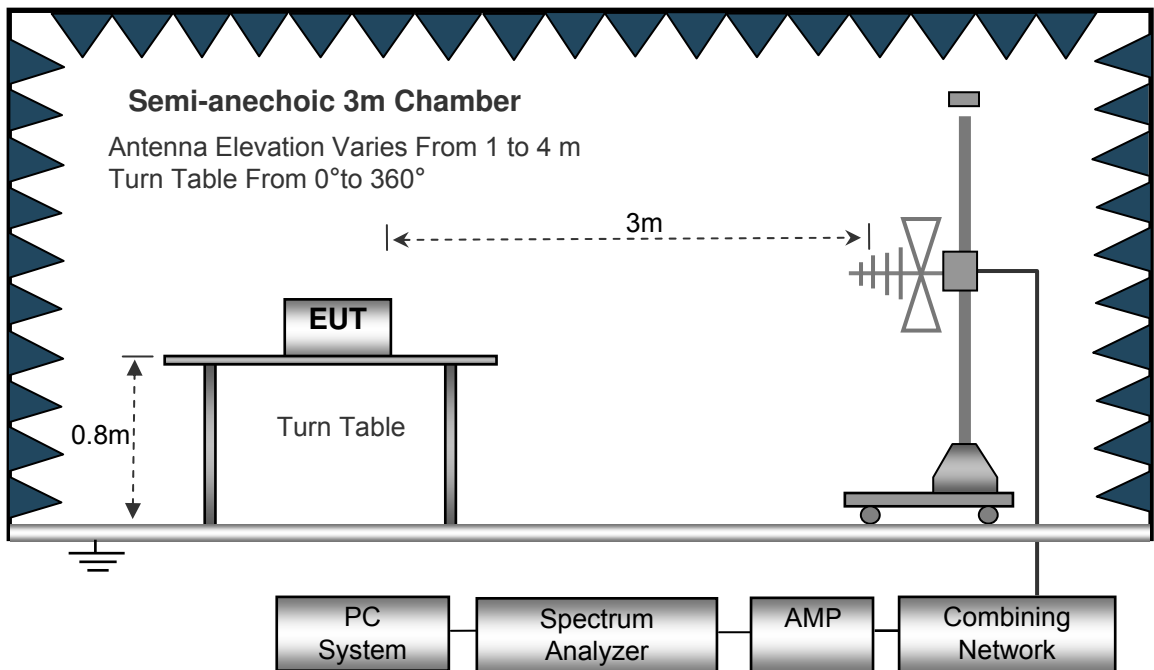

The test setup for emission measurement above 1 GHz.

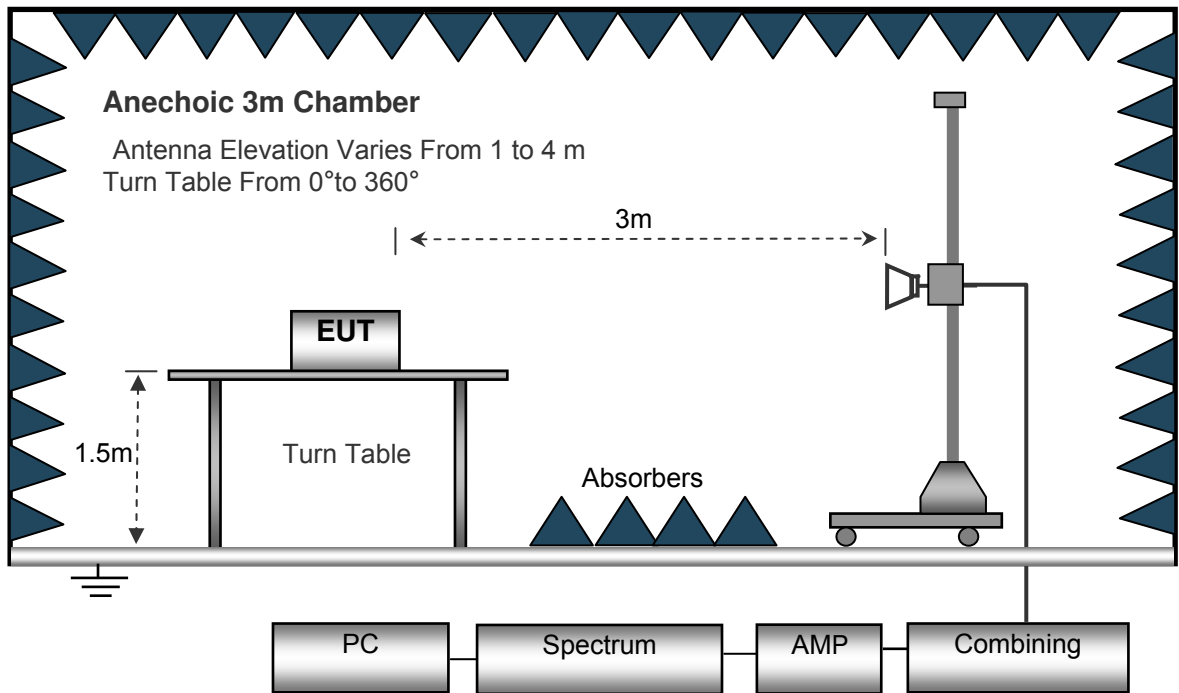

### 7.3 Spectrum Analyzer Setup

Below 30MHz

IF Bandwidth : 10kHz  
 Resolution Bandwidth : 10kHz  
 Video Bandwidth : 10kHz

30MHz ~ 1GHz

Detector : PK  
 Resolution Bandwidth : 100kHz  
 Video Bandwidth : 300kHz  
 Detector : QP  
 Resolution Bandwidth : 120kHz  
 Video Bandwidth : 300kHz

Above 1GHz

Detector : PK  
 Resolution Bandwidth : 1MHz  
 Video Bandwidth : 3MHz



## 7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m or 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.



### 7.5 Summary of Test Results

**Test Frequency: Below 30MHz**

The lowest oscillator is 315MHz, the test is not applicable

**Test Frequency: 30MHz ~ 5GHz**

Frequency	Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.231/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBµV)	(PK/QP/Av e)	Degree	(m)	(H/V)	(dB/m)	(dBµV/m)	(dBµV/m)	(dB)
188.14	46.45	QP	336	1.8	H	-16.93	29.52	43.5	-13.98
188.14	42.94	QP	146	1.7	V	-16.93	26.01	43.5	-17.49
315.00	82.15	PK	189	1.1	H	-13.56	68.59	100.83	-32.24
315.00	76.86	PK	140	1.5	V	-13.56	63.30	100.83	-37.53
630.00	66.87	PK	142	1.6	H	-6.74	60.13	80.83	-20.70
630.00	58.86	PK	123	1.7	V	-6.74	52.12	80.83	-28.71
945.00	59.92	PK	71	2.3	H	-4.99	54.93	74	-19.07
945.00	55.73	PK	66	1.7	V	-4.99	50.74	74	-23.26
1260.00	59.72	PK	31	2.4	H	-12.72	47.00	74	-27.00
1260.00	55.40	PK	23	1.4	V	-12.72	42.68	74	-31.32



Frequency	PK	Turn table Angle	RX Antenna		Duty cycle Factor	AV	FCC Part 15.231/209/205	
			Height	Polar			Limit	Margin
(MHz)	(dBμV/m)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
315.00	68.59	189	1.1	H	-8.92	59.67	80.83	-21.16
315.00	63.30	140	1.5	V	-8.92	54.38	80.83	-26.45
630.00	60.13	142	1.6	H	-8.92	51.21	60.83	-9.62
630.00	52.12	123	1.7	V	-8.92	43.20	60.83	-17.63
945.00	54.93	71	2.3	H	-8.92	46.01	54	-7.99
945.00	50.74	66	1.7	V	-8.92	41.82	54	-12.18
1260.00	47.00	31	2.4	H	-8.92	38.08	54	-15.92
1260.00	42.68	23	1.4	V	-8.92	33.76	54	-20.24



### 8 20dB Bandwidth Measurement

- Test Requirement : FCC Part15.231(c)
- Test Method : FCC Part15.231(c)
- Test Mode : Refer to section 3.3
- Limit : The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency.


#### 8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: For BLE, RBW = 3 kHz, VBW = 10kHz,

#### 8.2 Test Result

Test Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Result
315	55.09	787.5	pass

Test plots

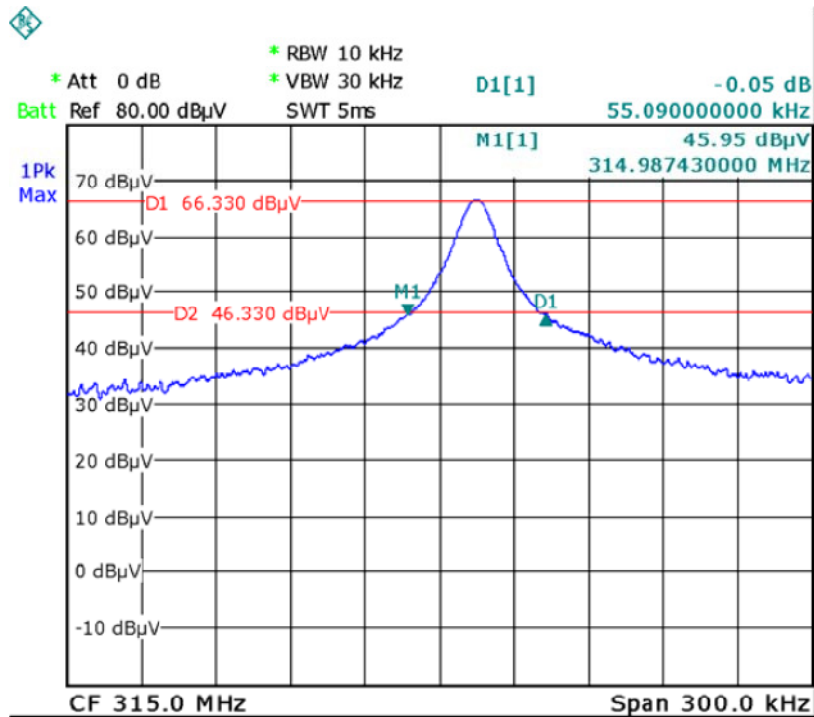



## 9 Antenna Requirement

According to the FCC part15.203, a transmitter can only be sold or operated with antennas with which it was approved. This product has an internal permanent antenna which meet the requirement of this section.

\*\*\*\*\* THE END REPORT\*\*\*\*\*