



主要技术参数 **Electrical Data:**

频率范围 **Frequency Range(MHz): 2400-2500MHz**

驻波比 **V.S.W.R: <=2**

输入阻抗 **Input Impedance(OHM): 50 Ohm**

增益 **Gain(dBi): 2dBi**

线径 (mm) : **0.6MM**

弹簧外径 **Diameter(mm): 3.5MM**


总长度 **Length(mm)包括焊接部分: 20.5MM**

接口形式 **Connector Type: Soldering**

鑫力盛五金电子有限公司
Xin Li Sheng Hardware Electronics Co., Ltd.


Frequency (MHz)	Efficiency (dB)	Efficiency (%)	Gain (dBi)
2400	-1.3	74.9	1.3
2410	-1.3	74.4	1.4
2420	-1.3	73.9	1.5
2430	-1.5	70.6	1.7
2440	-1.8	66.7	1.9
2450	-1.7	65.9	1.8
2660	-1.7	67.4	1.7
2470	-1.7	68.2	1.8
2480	-1.5	70.7	2.0
2490	-1.3	74.4	1.9
2500	-1.3	74.1	1.4

Total

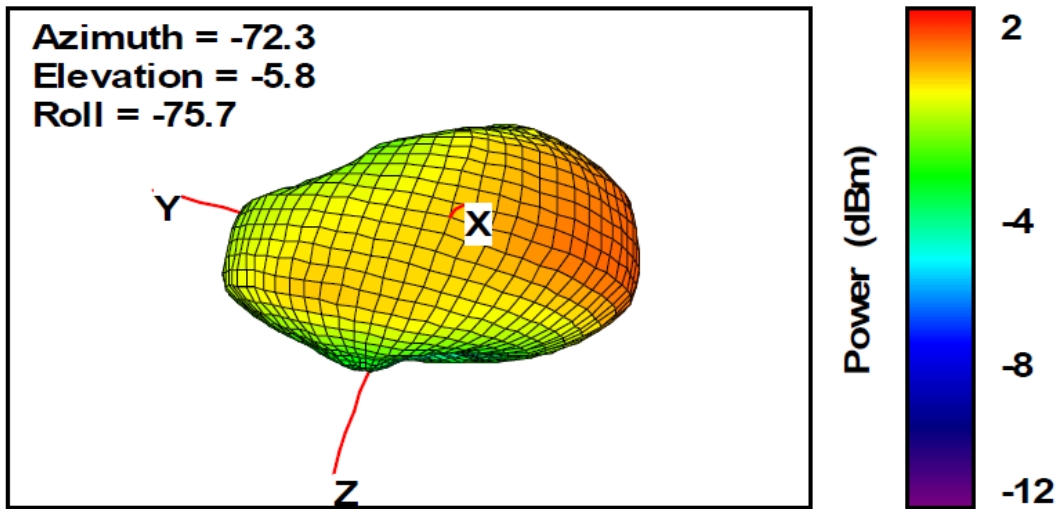


地址：深圳市龙岗区同乐社区园新路 22-5 栋
电话：0755-89565240 传真：0755-89565240
QQ：542907609 手机：15999756942 姚生

X

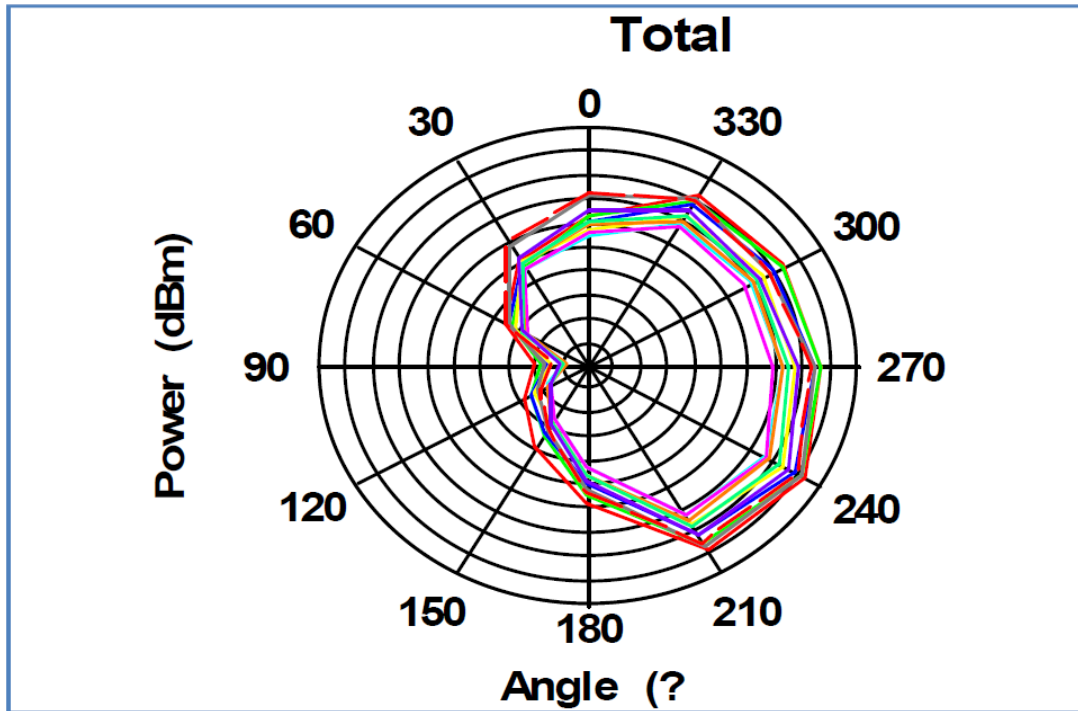

Y

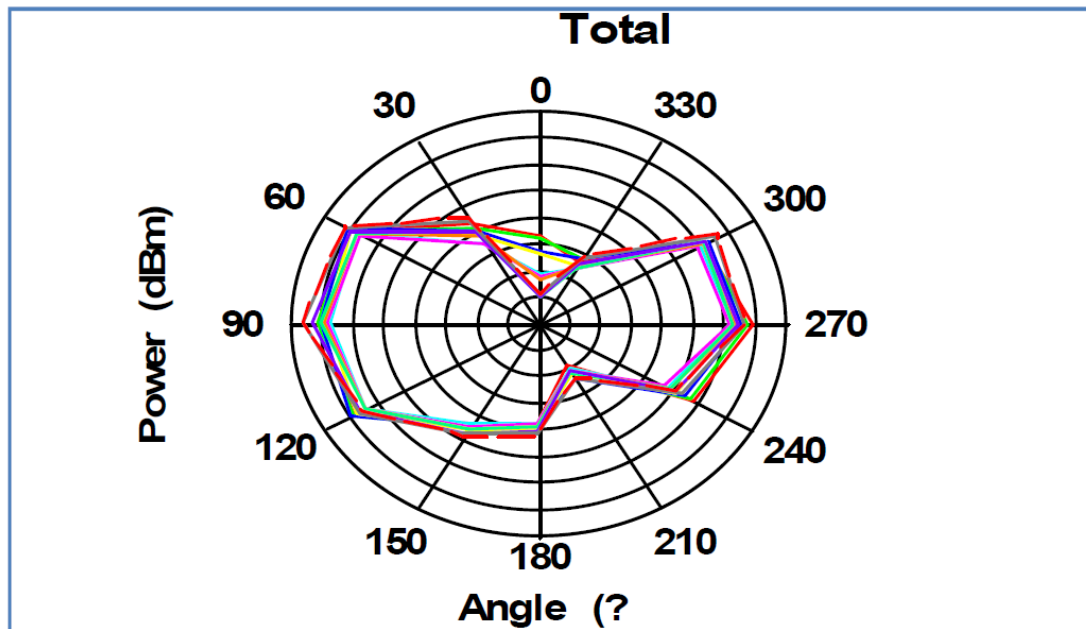

Z

