

TEST REPORT

Product : ESP-01M
Trade mark : N/A
Model/Type reference : ESP-01M
Serial Number : N/A
Report Number : EED32J00203501
FCC ID : 2AHMR-ESP01M
Date of Issue : Sep. 28, 2017
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

Shenzhen Ai-Thinker Technology Co., LTD
6/F, Block C2, Huafeng Industrial Park, Hangcheng
Road, Baoan district, Shenzhen, China

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested By:

Tom chen

Tom chen (Test Project)

Compiled by:

Kevin lan

Kevin lan (Project Engineer)

Reviewed by:

Kevin Yang

Kevin yang (Reviewer)

Approved by:

Sheek Luo

Sheek Luo (Lab supervisor)

Date:

Sep. 28, 2017

Check No.:3043801961



2 Version

Version No.	Date	Description
00	Sep. 28, 2017	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013/ KDB 558074 D01v04	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013/ KDB 558074 D01v04	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01v04	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013/ KDB 558074 D01v04	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013/ KDB 558074 D01v04	PASS
Radiated Spurious Emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013 KDB 558074 D01v04	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013 KDB 558074 D01v04	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested samples and the sample information are provided by the client.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
6 GENERAL INFORMATION	8
6.1 CLIENT INFORMATION.....	8
6.2 GENERAL DESCRIPTION OF EUT.....	8
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	8
6.4 DESCRIPTION OF SUPPORT UNITS.....	8
6.5 TEST LOCATION.....	9
6.6 DEVIATION FROM STANDARDS.....	9
6.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	9
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	9
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	9
7 EQUIPMENT LIST	10
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	13
Appendix A): Conducted Peak Output Power.....	14
Appendix B): 6dB Occupied Bandwidth.....	15
Appendix C): Band-edge for RF Conducted Emissions.....	19
Appendix D): RF Conducted Spurious Emissions.....	22
Appendix E): Power Spectral Density.....	29
Appendix F): Antenna Requirement.....	33
Appendix G): AC Power Line Conducted Emission.....	34
Appendix H): Restricted bands around fundamental frequency (Radiated).....	37
Appendix I): Radiated Spurious Emissions.....	51
PHOTOGRAPHS OF TEST SETUP	58
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	61

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

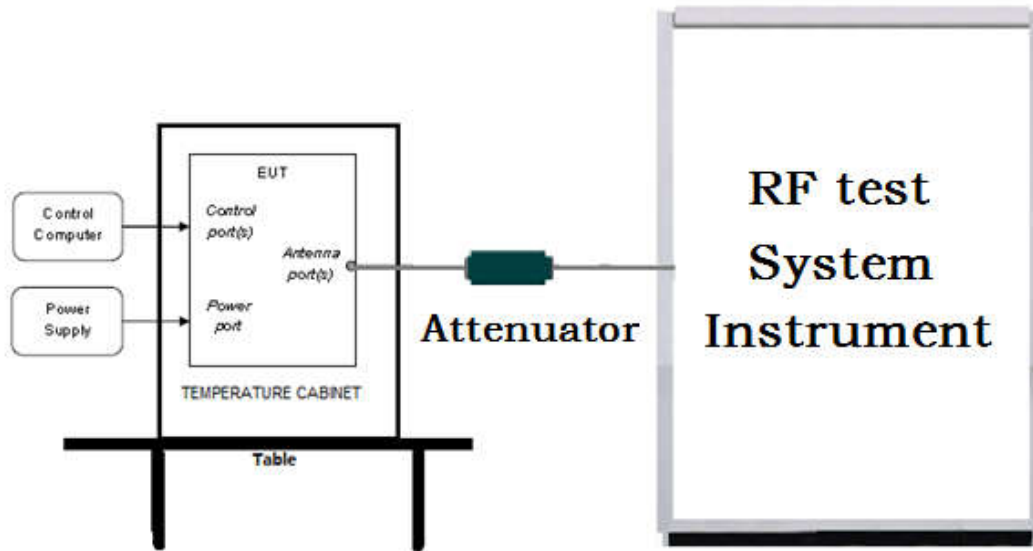

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

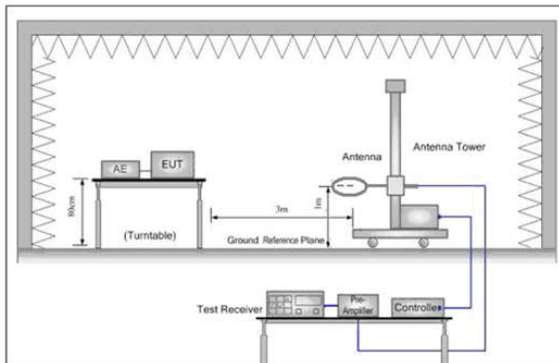


Figure 1. Below 30MHz

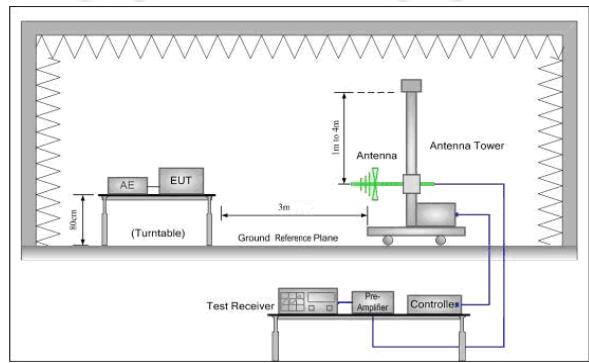


Figure 2. 30MHz to 1GHz


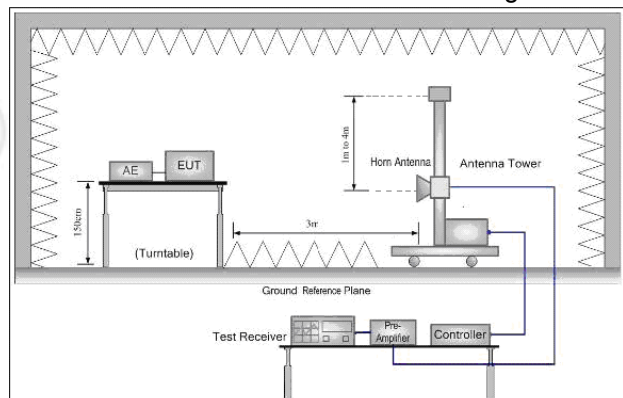


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup
Conducted Emissions setup

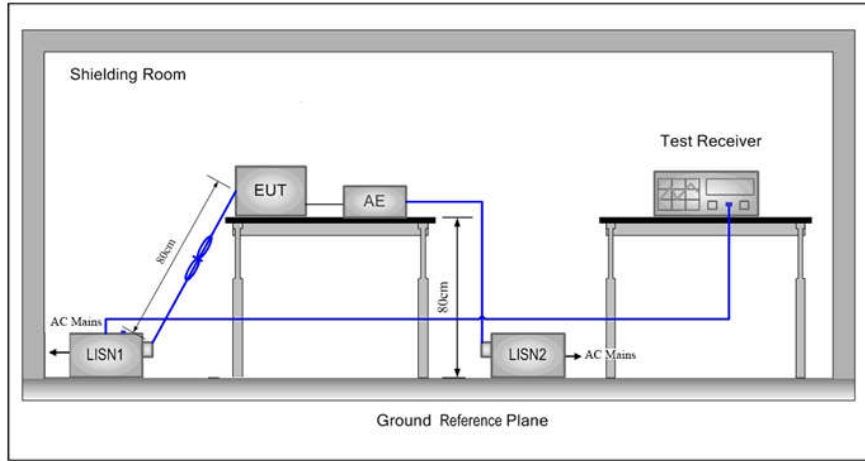

5.2 Test Environment

Operating Environment:	
Temperature:	25.1 °C
Humidity:	60 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test channel:

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11b/g/n(HT20)	2412MHz ~2462 MHz	Channel 1	Channel 6	Channel11
		2412MHz	2437MHz	2462MHz
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.			

Test mode:

Pre-scan under all rate at lowest channel 1

Mode	802.11b								
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps					
Power(dBm)	16.72	16.81	16.89	16.99					
Mode	802.11g								
Data Rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	
Power(dBm)	15.86	15.78	15.71	15.62	15.55	15.47	15.41	15.33	
Mode	802.11n (HT20)								
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps	
Power(dBm)	15.87	15.80	15.71	15.64	15.52	15.44	15.37	15.22	

Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20).

6 General Information

6.1 Client Information

Applicant:	Shenzhen Ai-Thinker Technology Co., LTD
Address of Applicant:	6/F, Block C2, Huafeng Industrial Park, Hangcheng Road, Baoan district, Shenzhen, China
Manufacturer:	Shenzhen Ai-Thinker Technology Co., LTD
Address of Manufacturer:	6/F, Block C2, Huafeng Industrial Park, Hangcheng Road, Baoan district, Shenzhen, China
Factory:	Shenzhen Ai-Thinker Technology Co., LTD
Address of Factory:	6/F, Block C2, Huafeng Industrial Park, Hangcheng Road, Baoan district, Shenzhen, China

6.2 General Description of EUT

Product Name:	ESP-01M
Model No.(EUT):	ESP-01M
Trade Mark:	N/A
EUT Supports Radios application:	Wi-Fi: 802.11 b/g/n(20M) , 2412MHz-2462MHz
Power Supply:	DC 3.3V
Sample Received Date:	Sep. 12, 2017
Sample tested Date:	Sep. 12, 2017 to Sep. 28, 2017

6.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g :OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20) : OFDM (64QAM, 16QAM, QPSK,BPSK)
Test Power Grade:	N/A
Test Software of EUT:	ESP Series Modules FCC & CE Test Tool V2.2.3.exe (manufacturer declare)
Antenna Type and Gain:	Type: PCB Antenna; Gain: 3dBi
Test Voltage:	DC 3.3V and AC 120V/60Hz

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

6.4 Description of Support Units

The EUT has been tested independently

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China 518101

Telephone: +86 (0) 755 3368 3668 Fax: +86 (0) 755 3368 3385

No tests were sub-contracted.

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	03-14-2017	03-13-2018
Communication test set test set	Agilent	N4010A	MY51400230	03-14-2017	03-13-2018
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-14-2017	03-13-2018
Signal Generator	Keysight	N5182B	MY53051549	03-14-2017	03-13-2018
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-11-2017	01-10-2018
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX01CA09C L12-0395-001	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX01CA08C L12-0393-001	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX02CA04C L12-0396-002	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX02CA03C L12-0394-001	---	01-11-2017	01-10-2018
DC Power	Keysight	E3642A	MY54436035	03-14-2017	03-13-2018
power meter & power sensor	R&S	OSP120	101374	03-14-2017	03-13-2018
RF control unit	JS Tonscend	JS0806-2	158060006	03-14-2017	03-13-2018

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06-05-2016	06-05-2019
TRILOG Broadband Antenna	SCHWARZBEC K	VULB9163	9163-484	05-23-2017	05-22-2018
Microwave Preamplifier	Agilent	8449B	3008A02425	02-16-2017	02-15-2018
Horn Antenna	ETS-LINDGREN	3117	00057407	07-20-2015	07-18-2018
Loop Antenna	ETS	6502	00071730	07-30-2016	07-28-2018
Microwave Preamplifier	A.H.SYSTEMS	PAP-1840-60	6041.6042	06-30-2015	06-28-2018
Horn Antenna	A.H.SYSTEMS	SAS-574 374	---	06-30-2015	06-28-2018
Spectrum Analyzer	R&S	FSP40	100416	06-13-2017	06-12-2018
Receiver	R&S	ESCI	100435	06-14-2017	06-13-2018
Multi device Controller	maturu	NCD/070/10711 112	---	01-11-2017	01-10-2018
LISN	schwarzbeck	NNBM8125	81251547	06-13-2017	06-12-2018
LISN	schwarzbeck	NNBM8125	81251548	06-13-2017	06-12-2018
Signal Generator	Agilent	E4438C	MY45095744	03-14-2017	03-13-2018
Signal Generator	Keysight	E8257D	MY53401106	03-14-2017	03-13-2018
Temperature/ Humidity Indicator	TAYLOR	1451	1905	05-08-2017	05-07-2018
Communication test set	Agilent	E5515C	GB47050534	03-14-2017	03-13-2018
Cable line	Fulai(7M)	SF106	5219/6A	01-11-2017	01-10-2018
Cable line	Fulai(6M)	SF106	5220/6A	01-11-2017	01-10-2018
Cable line	Fulai(3M)	SF106	5216/6A	01-11-2017	01-10-2018
Cable line	Fulai(3M)	SF106	5217/6A	01-11-2017	01-10-2018
Communication test set	R&S	CMW500	152394	03-14-2017	03-13-2018
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-11-2017	01-10-2018
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX01CA09 CL12-0395-001	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX01CA08 CL12-0393-001	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX02CA04 CL12-0396-002	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX02CA03 CL12-0394-001	---	01-11-2017	01-10-2018

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100009	06-14-2017	06-13-2018
Temperature/ Humidity Indicator	TAYLOR	1451	1905	05-08-2017	05-07-2018
Communication test set	Agilent	E5515C	GB47050534	03-14-2017	03-13-2018
Communication test set	R&S	CMW500	152394	03-14-2017	03-13-2018
LISN	R&S	ENV216	100098	06-13-2017	06-12-2018
LISN	schwarzbeck	NNLK8121	8121-529	06-13-2017	06-12-2018
Current Probe	R&S	EZ17	100106	06-13-2017	06-12-2018
ISN	TESEQ GmbH	ISN T800	30297	02-23-2017	02-22-2018

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test Requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (b)(3)	ANSI C63.10/ KDB 558074	Conducted Peak Output Power	PASS	Appendix A)
Part15C Section 15.247 (a)(2)	ANSI C63.10/ KDB 558074	6dB Occupied Bandwidth	PASS	Appendix B)
Part15C Section 15.247(d)	ANSI C63.10/ KDB 558074	Band-edge for RF Conducted Emissions	PASS	Appendix C)
Part15C Section 15.247(d)	ANSI C63.10/ KDB 558074	RF Conducted Spurious Emissions	PASS	Appendix D)
Part15C Section 15.247 (e)	ANSI C63.10/ KDB 558074	Power Spectral Density	PASS	Appendix E)
Part15C Section 15.203/15.247 (c)	ANSI C63.10	Antenna Requirement	PASS	Appendix F)
Part15C Section 15.207	ANSI C63.10	AC Power Line Conducted Emission	PASS	Appendix G)
Part15C Section 15.205/15.209	ANSI C63.10	Restricted bands around fundamental frequency (Radiated Emission)	PASS	Appendix H)
Part15C Section 15.205/15.209	ANSI C63.10	Radiated Spurious Emissions	PASS	Appendix I)

Appendix A): Conducted Peak Output Power

Test Procedure

1. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Measure the conducted output power and record the results in the test report.


Result Table

Mode	Channel	Conducted Peak Output Power [dBm]	Verdict
11B	LCH	16.99	PASS
11B	MCH	15.95	PASS
11B	HCH	14.92	PASS
11G	LCH	15.86	PASS
11G	MCH	15.00	PASS
11G	HCH	13.99	PASS
11N20SISO	LCH	15.87	PASS
11N20SISO	MCH	14.99	PASS
11N20SISO	HCH	13.99	PASS

**Appendix B): 6dB Occupied Bandwidth
Result Table**

Mode	Channel	6dB Bandwidth [MHz]	99% OBW [MHz]	Verdict	Remark
11B	LCH	8.076	10.447	PASS	Peak detector
11B	MCH	8.543	10.474	PASS	
11B	HCH	8.090	10.432	PASS	
11G	LCH	16.35	16.595	PASS	
11G	MCH	16.35	16.599	PASS	
11G	HCH	16.35	16.604	PASS	
11N20SISO	LCH	17.58	17.791	PASS	
11N20SISO	MCH	17.59	17.811	PASS	
11N20SISO	HCH	17.59	17.807	PASS	

Test Graph

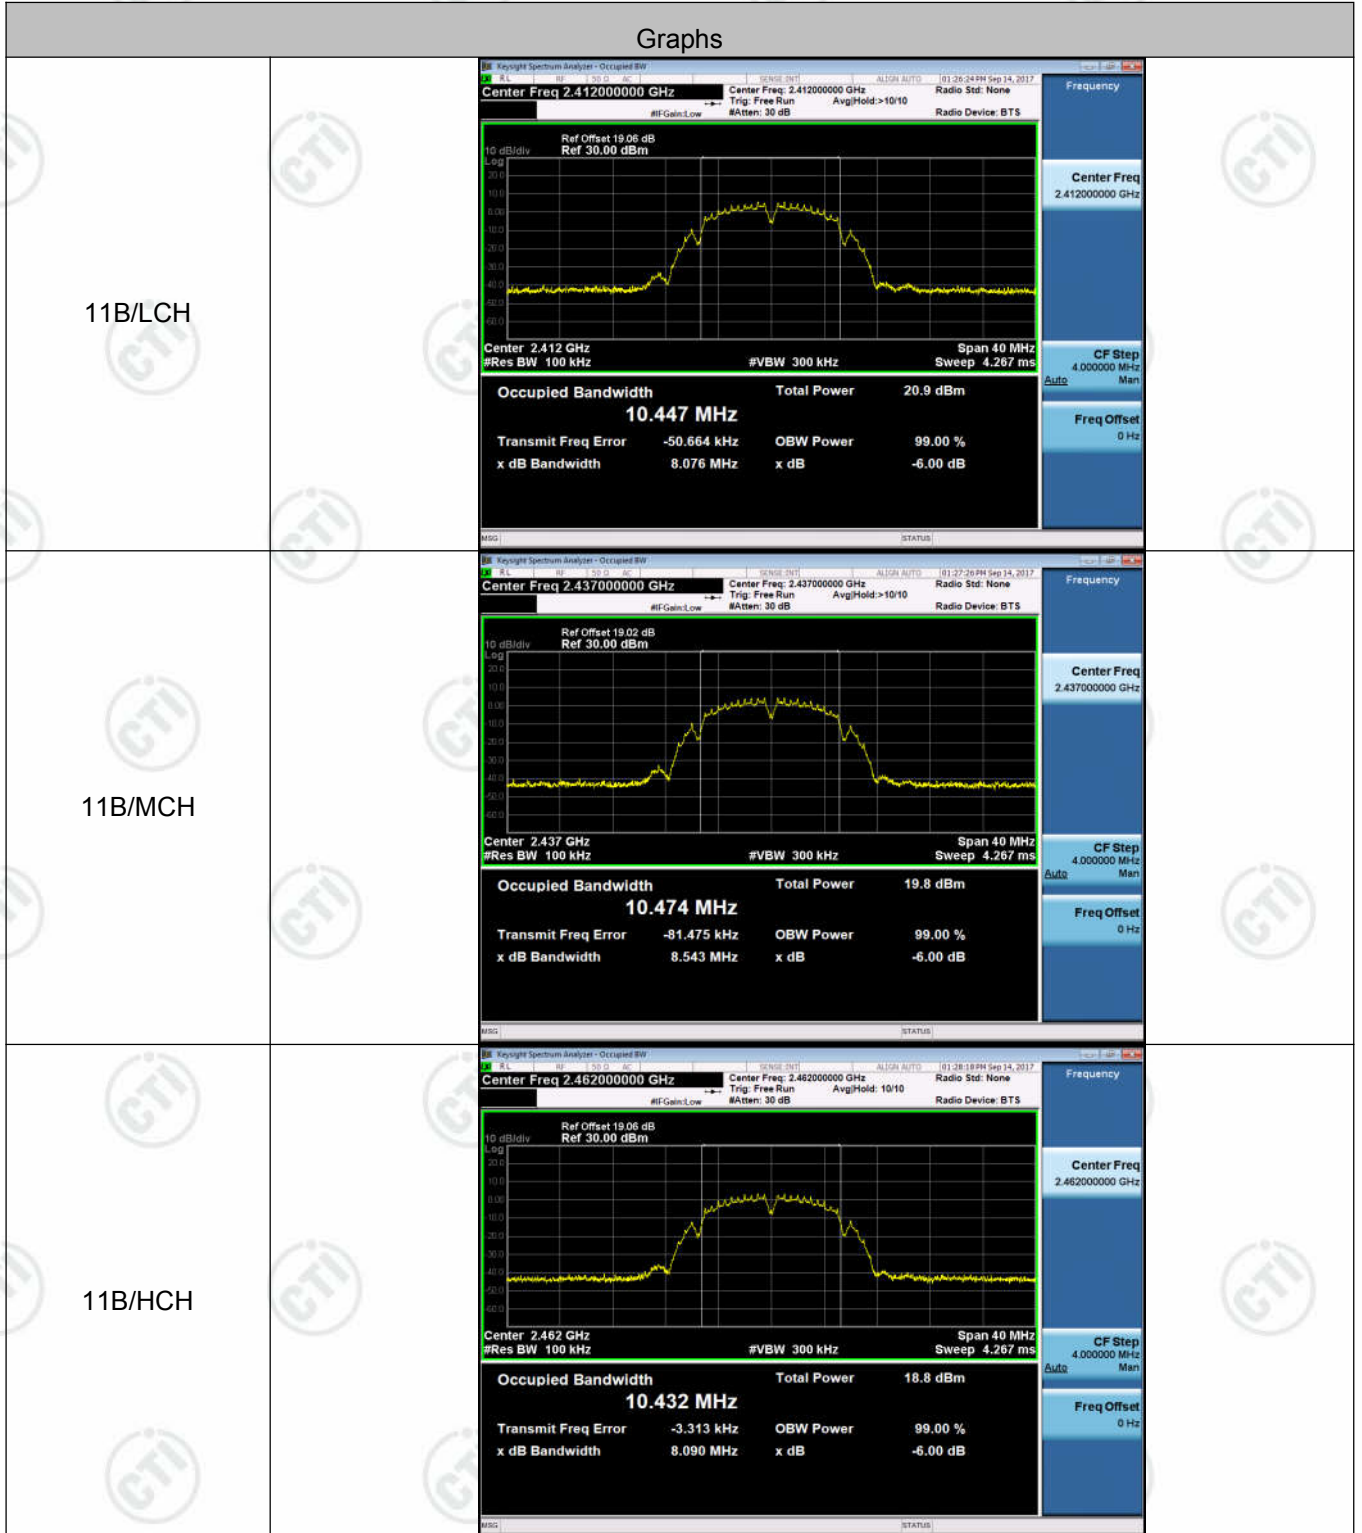


<p>11G/LCH</p>	<p>Center Freq: 2.412000000 GHz</p> <p>Occupied Bandwidth: 16.595 MHz</p> <p>Total Power: 14.4 dBm</p> <p>Transmit Freq Error: -36.203 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 16.35 MHz, -6.00 dB</p>
<p>11G/MCH</p>	<p>Center Freq: 2.437000000 GHz</p> <p>Occupied Bandwidth: 16.599 MHz</p> <p>Total Power: 13.6 dBm</p> <p>Transmit Freq Error: -44.260 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 16.35 MHz, -6.00 dB</p>
<p>11G/HCH</p>	<p>Center Freq: 2.462000000 GHz</p> <p>Occupied Bandwidth: 16.604 MHz</p> <p>Total Power: 12.5 dBm</p> <p>Transmit Freq Error: -4.285 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 16.35 MHz, -6.00 dB</p>

<p>11N20SISO/LCH</p>	<p>Center Freq 2.412000000 GHz</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset 19.06 dB Ref 30.00 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>Span 40 MHz Sweep 4.267 ms</p> <p>Occupied Bandwidth 17.791 MHz Total Power 14.6 dBm</p> <p>Transmit Freq Error -18.856 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 17.58 MHz x dB -6.00 dB</p>
<p>11N20SISO/MCH</p>	<p>Center Freq 2.437000000 GHz</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 19.02 dB Ref 30.00 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>Span 40 MHz Sweep 4.267 ms</p> <p>Occupied Bandwidth 17.811 MHz Total Power 13.6 dBm</p> <p>Transmit Freq Error -35.375 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 17.59 MHz x dB -6.00 dB</p>
<p>11N20SISO/HCH</p>	<p>Center Freq 2.462000000 GHz</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 19.06 dB Ref 30.00 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>Span 40 MHz Sweep 4.267 ms</p> <p>Occupied Bandwidth 17.807 MHz Total Power 12.4 dBm</p> <p>Transmit Freq Error -10.904 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 17.59 MHz x dB -6.00 dB</p>

Appendix C): Band-edge for RF Conducted Emissions
Result Table

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
11B	LCH	1.511	-50.809	-18.49	PASS
11B	HCH	-0.858	-49.898	-20.86	PASS
11G	LCH	-2.578	-48.622	-22.58	PASS
11G	HCH	-4.378	-48.722	-24.38	PASS
11N20SISO	LCH	-3.416	-48.462	-23.42	PASS
11N20SISO	HCH	-5.641	-48.628	-25.64	PASS

Test Graph

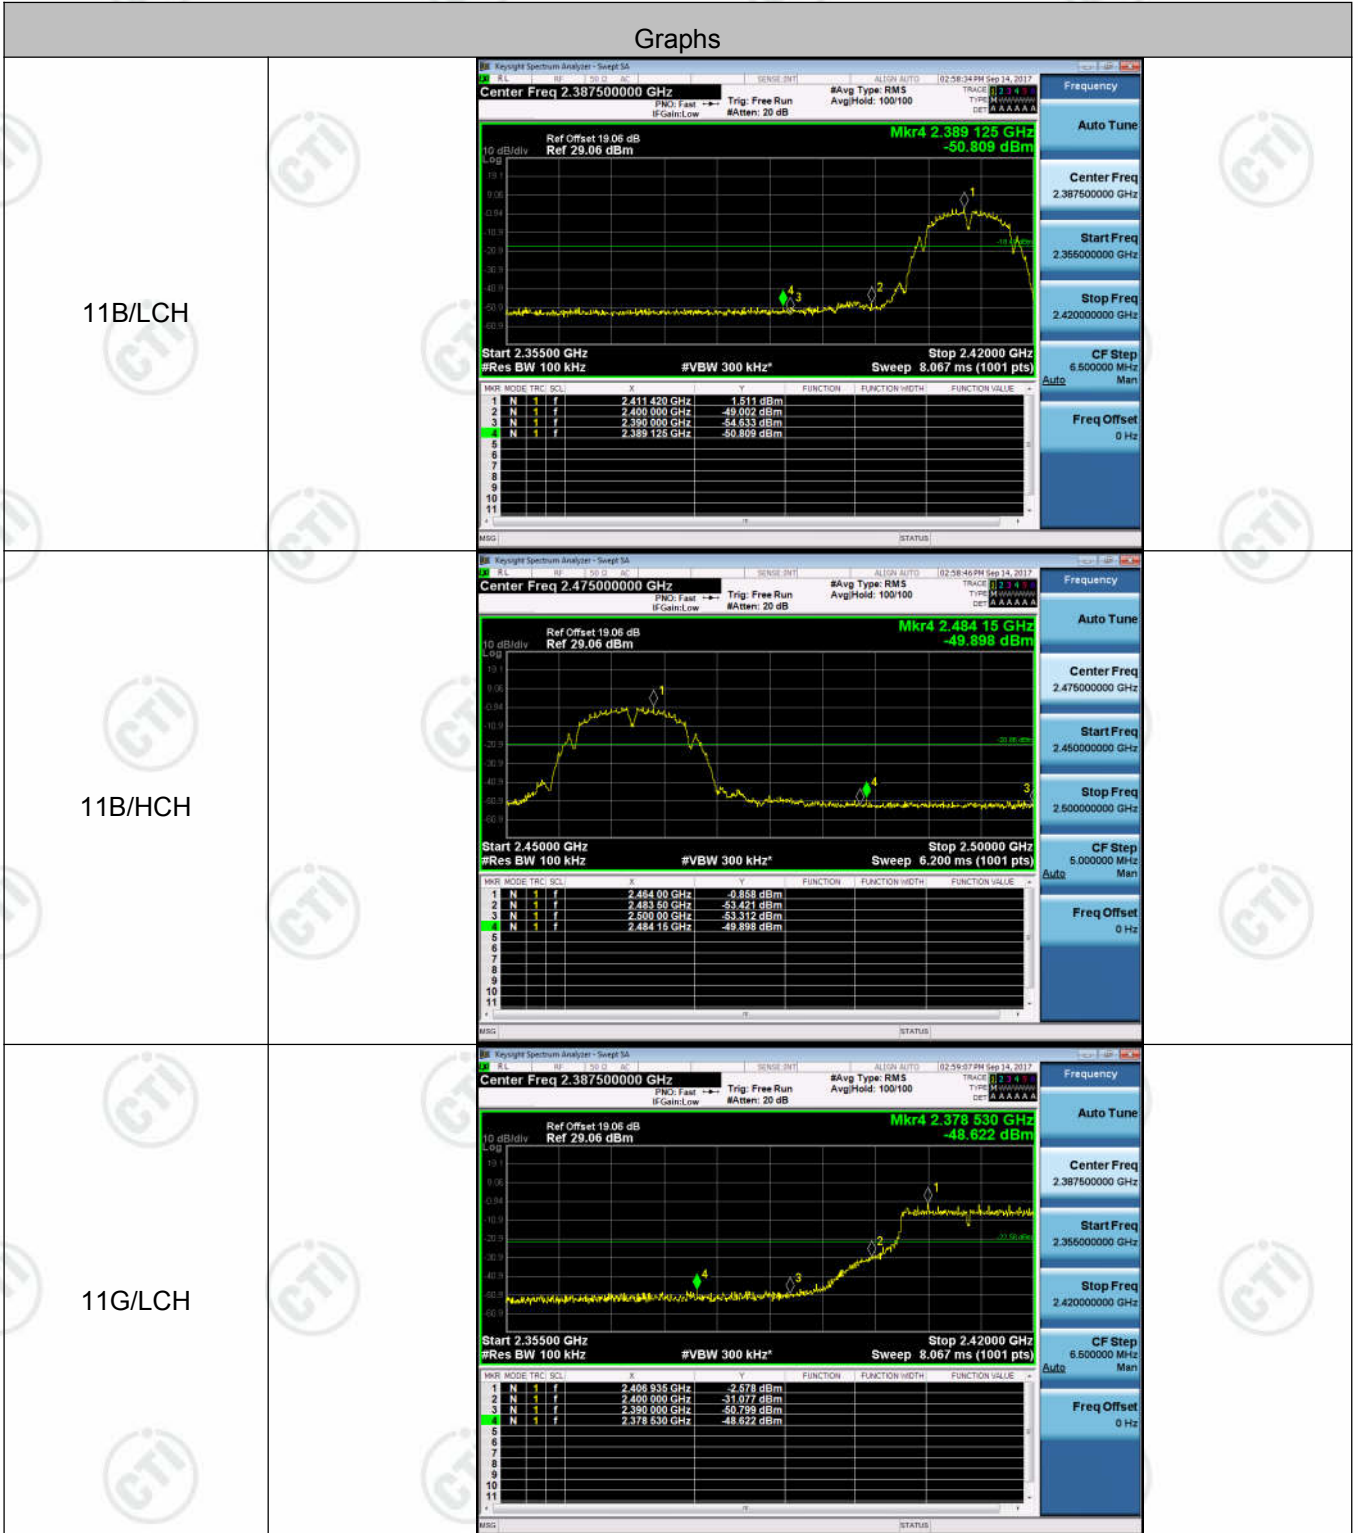



<p>11G/HCH</p>	<p>Center Freq 2.47500000 GHz</p> <p>Mkr4 2.486 05 GHz -48.722 dBm</p> <p>Start 2.45000 GHz Stop 2.50000 GHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 6.200 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>f</td> <td>f</td> <td>2.463 25 GHz</td> <td>-4.378 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>f</td> <td>f</td> <td>2.480 50 GHz</td> <td>-50.443 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>f</td> <td>f</td> <td>2.500 00 GHz</td> <td>-53.465 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>f</td> <td>f</td> <td>2.486 05 GHz</td> <td>-48.722 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f	f	2.463 25 GHz	-4.378 dBm				2	N	f	f	2.480 50 GHz	-50.443 dBm				3	N	f	f	2.500 00 GHz	-53.465 dBm				4	N	f	f	2.486 05 GHz	-48.722 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	f	f	2.463 25 GHz	-4.378 dBm																																									
2	N	f	f	2.480 50 GHz	-50.443 dBm																																									
3	N	f	f	2.500 00 GHz	-53.465 dBm																																									
4	N	f	f	2.486 05 GHz	-48.722 dBm																																									
<p>11N20SISO/LCH</p>	<p>Center Freq 2.38750000 GHz</p> <p>Mkr4 2.368 715 GHz -48.462 dBm</p> <p>Start 2.35500 GHz Stop 2.42000 GHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 8.067 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>f</td> <td>f</td> <td>2.413 240 GHz</td> <td>-3.416 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>f</td> <td>f</td> <td>2.400 000 GHz</td> <td>-31.719 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>f</td> <td>f</td> <td>2.390 000 GHz</td> <td>-52.281 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>f</td> <td>f</td> <td>2.368 715 GHz</td> <td>-48.462 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f	f	2.413 240 GHz	-3.416 dBm				2	N	f	f	2.400 000 GHz	-31.719 dBm				3	N	f	f	2.390 000 GHz	-52.281 dBm				4	N	f	f	2.368 715 GHz	-48.462 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	f	f	2.413 240 GHz	-3.416 dBm																																									
2	N	f	f	2.400 000 GHz	-31.719 dBm																																									
3	N	f	f	2.390 000 GHz	-52.281 dBm																																									
4	N	f	f	2.368 715 GHz	-48.462 dBm																																									
<p>11N20SISO/HCH</p>	<p>Center Freq 2.47500000 GHz</p> <p>Mkr4 2.484 55 GHz -48.628 dBm</p> <p>Start 2.45000 GHz Stop 2.50000 GHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 6.200 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>f</td> <td>f</td> <td>2.454 50 GHz</td> <td>-5.641 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>f</td> <td>f</td> <td>2.483 50 GHz</td> <td>-51.523 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>f</td> <td>f</td> <td>2.500 00 GHz</td> <td>-53.945 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>f</td> <td>f</td> <td>2.484 55 GHz</td> <td>-48.628 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f	f	2.454 50 GHz	-5.641 dBm				2	N	f	f	2.483 50 GHz	-51.523 dBm				3	N	f	f	2.500 00 GHz	-53.945 dBm				4	N	f	f	2.484 55 GHz	-48.628 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	f	f	2.454 50 GHz	-5.641 dBm																																									
2	N	f	f	2.483 50 GHz	-51.523 dBm																																									
3	N	f	f	2.500 00 GHz	-53.945 dBm																																									
4	N	f	f	2.484 55 GHz	-48.628 dBm																																									



Appendix D): RF Conducted Spurious Emissions



Result Table



Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
11B	LCH	5.491	<Limit	PASS
11B	MCH	4.397	<Limit	PASS
11B	HCH	3.479	<Limit	PASS
11G	LCH	-2.965	<Limit	PASS
11G	MCH	-3.667	<Limit	PASS
11G	HCH	-5.123	<Limit	PASS
11N20SISO	LCH	-2.875	<Limit	PASS
11N20SISO	MCH	-3.737	<Limit	PASS
11N20SISO	HCH	-5.083	<Limit	PASS



Test Graph

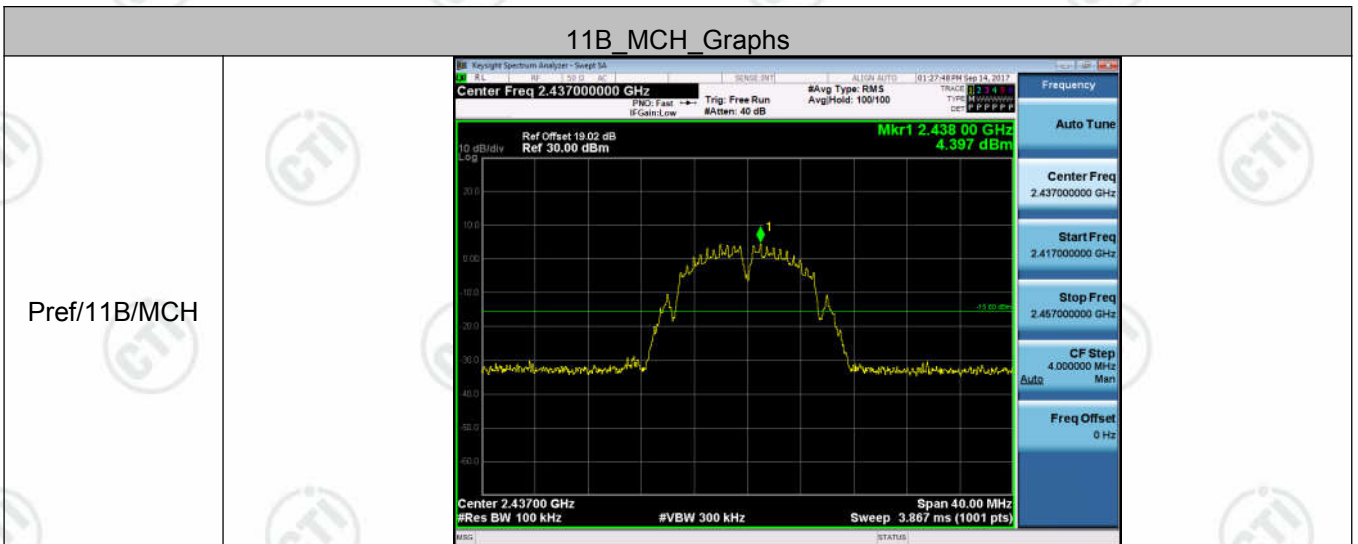
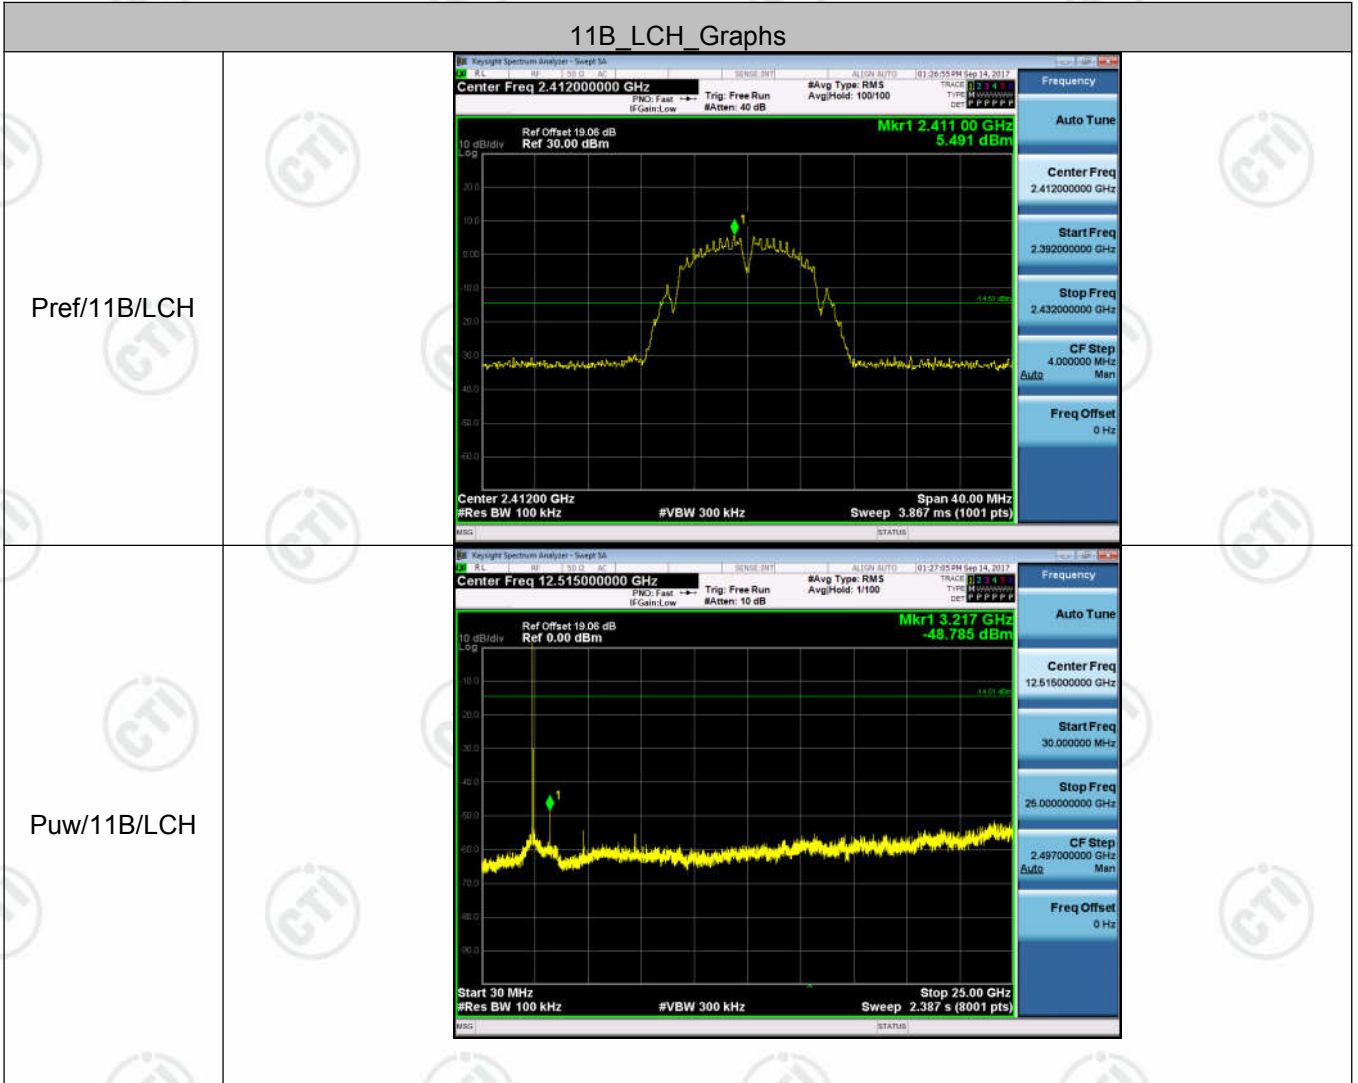


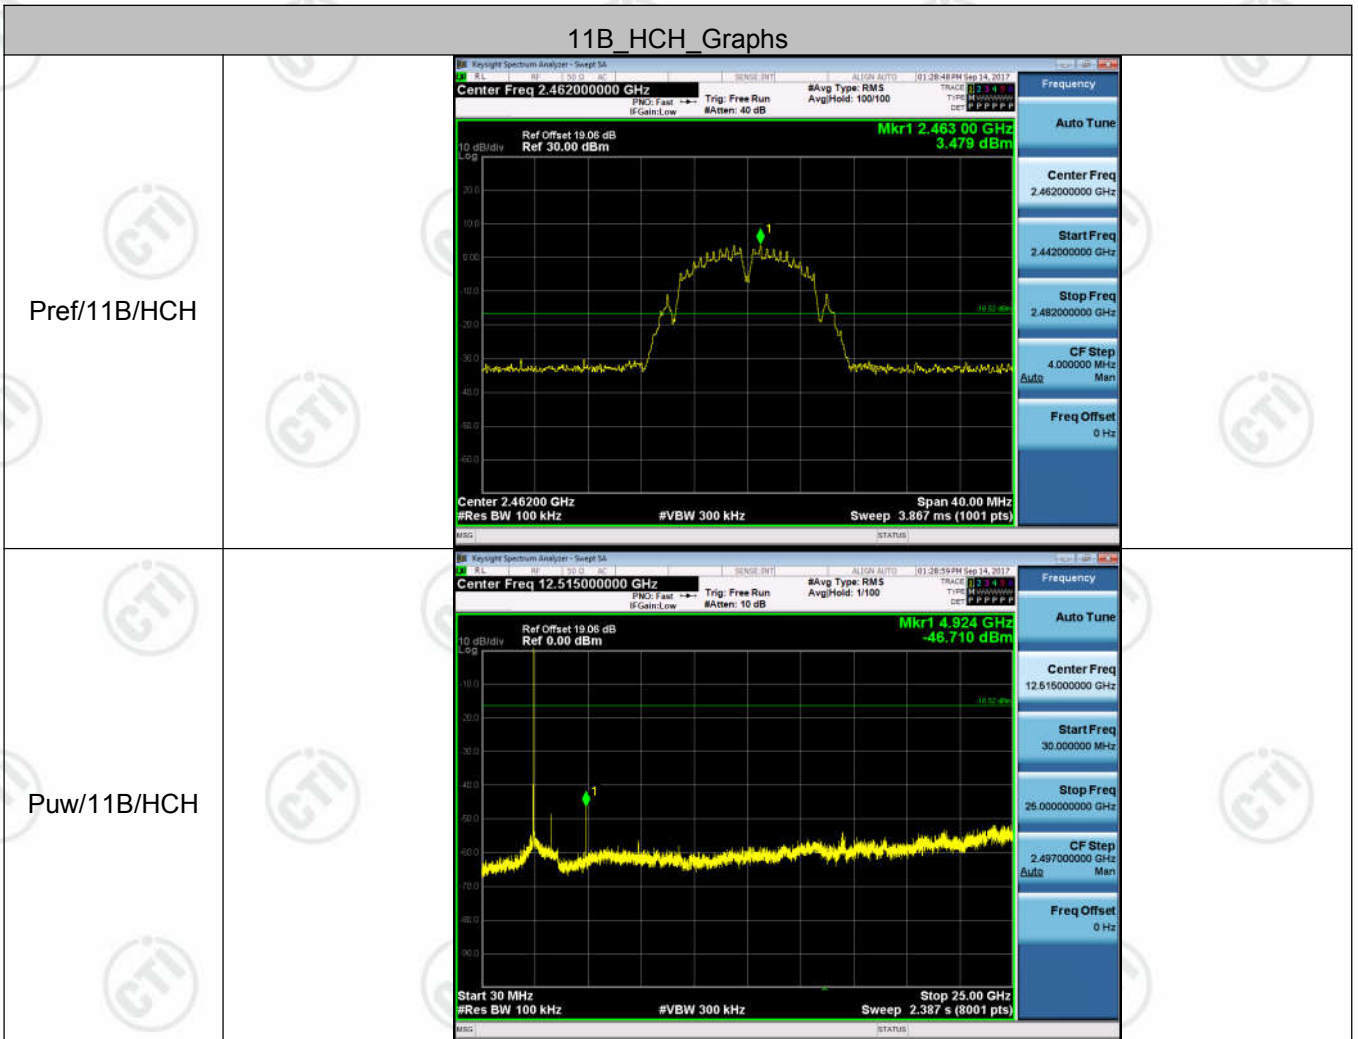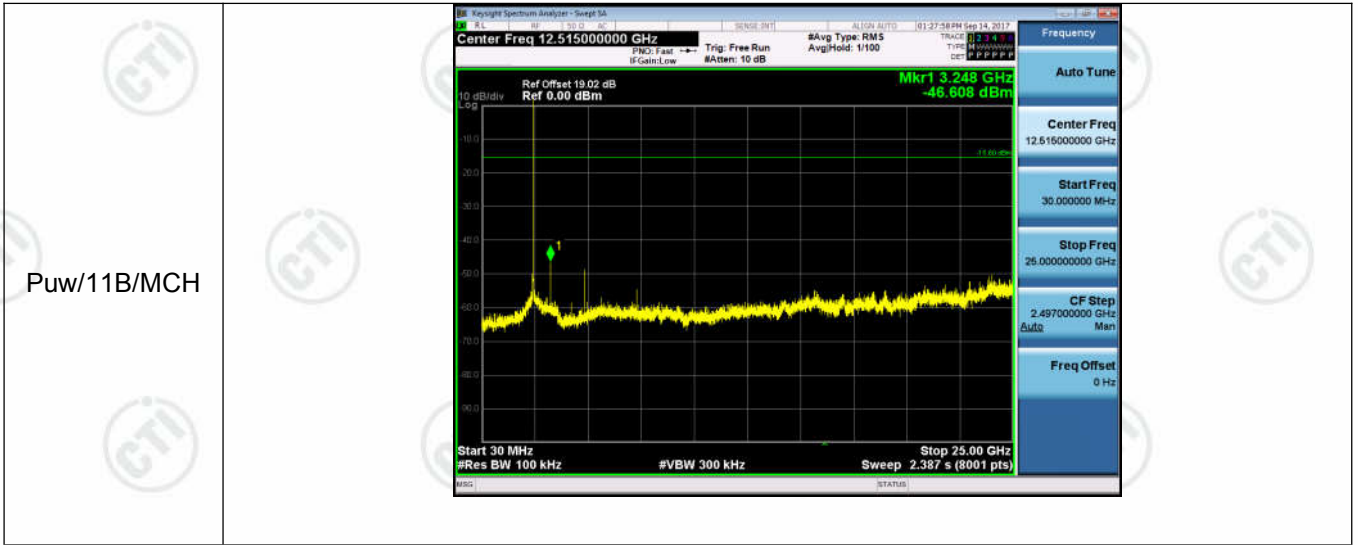

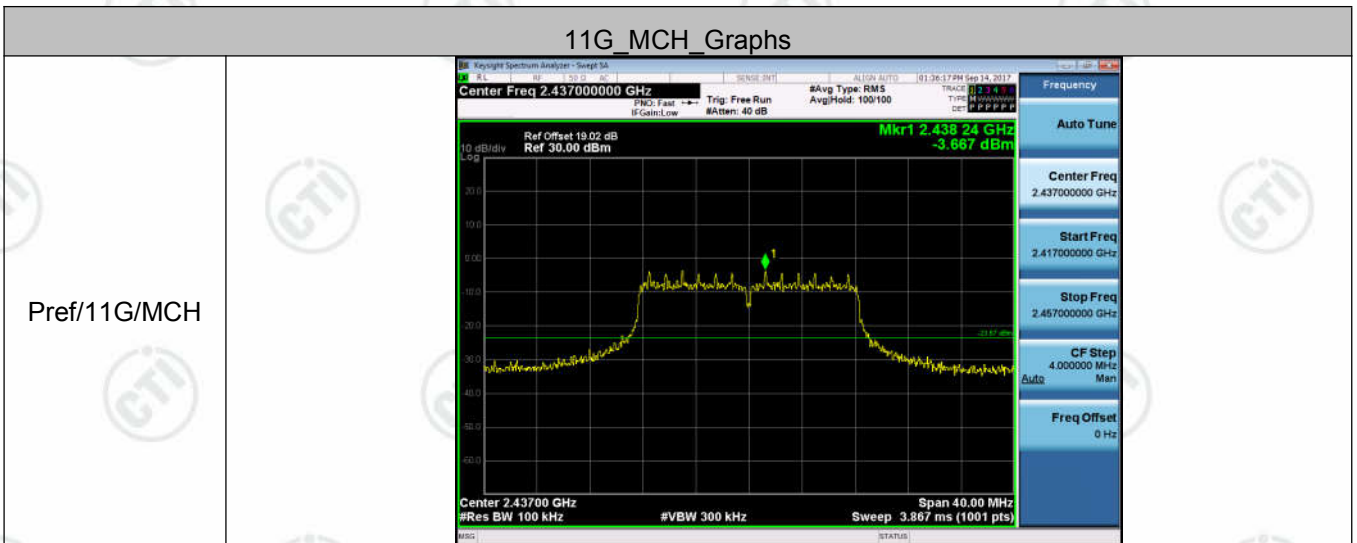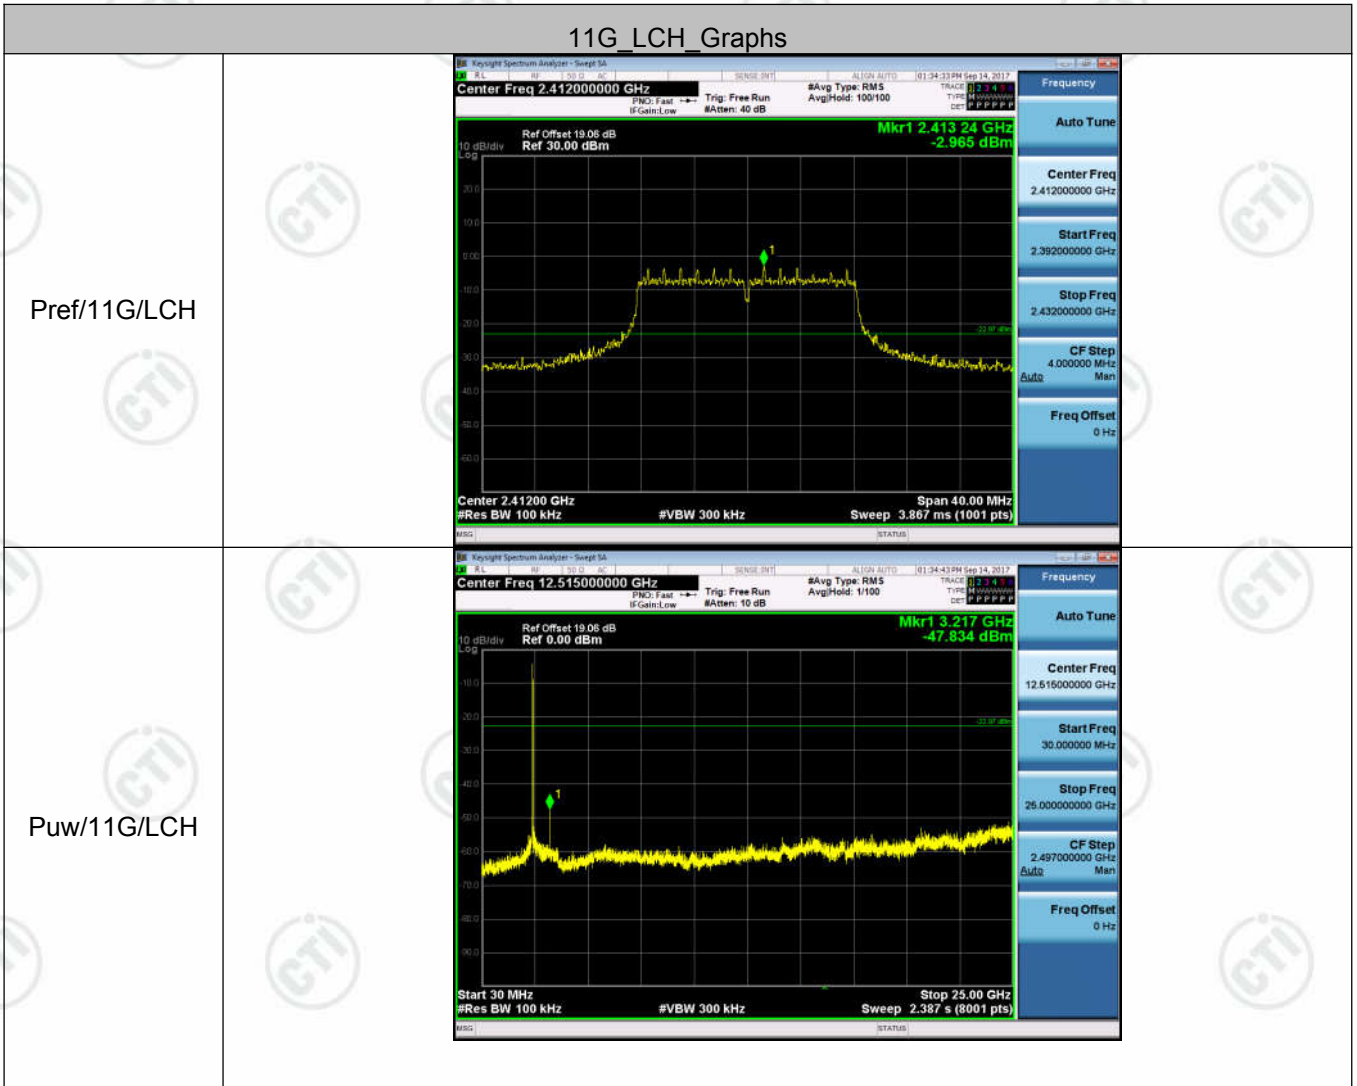

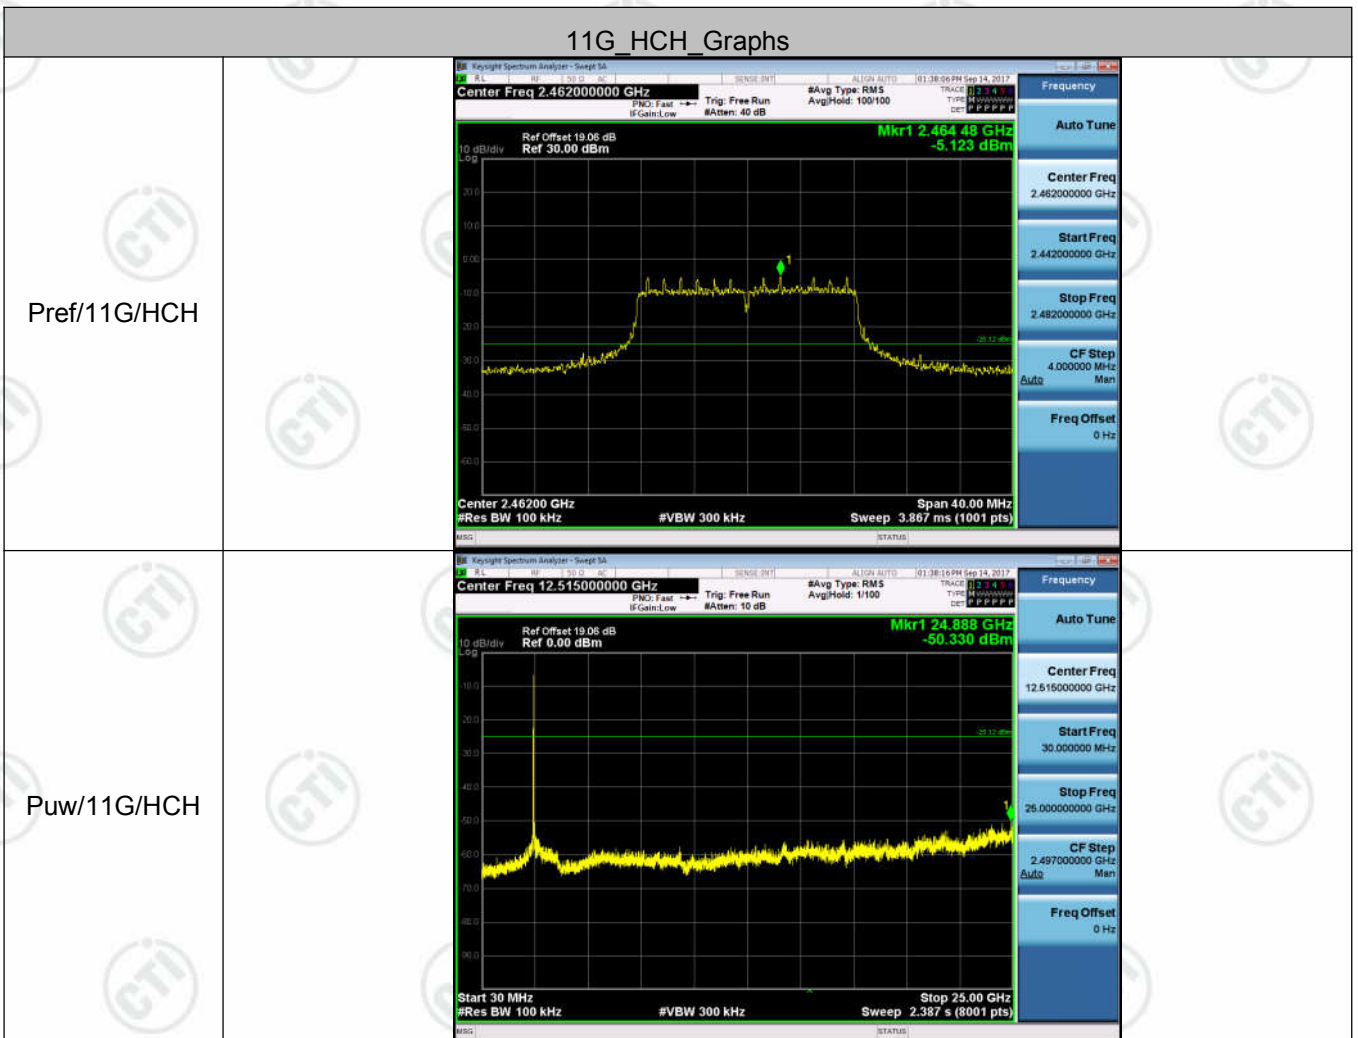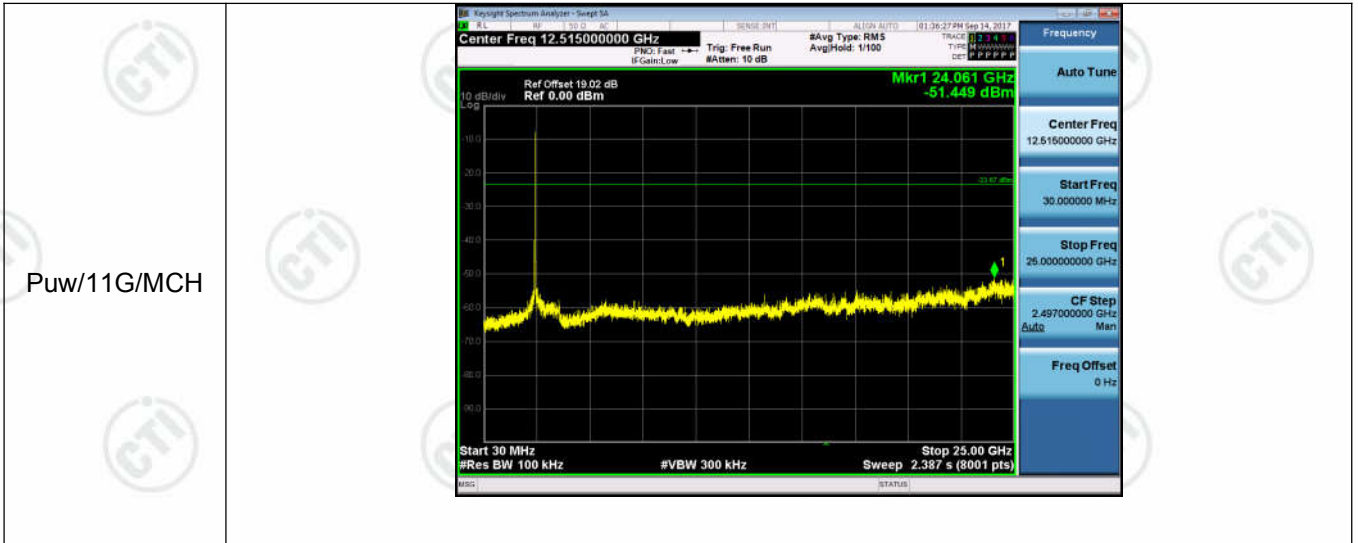

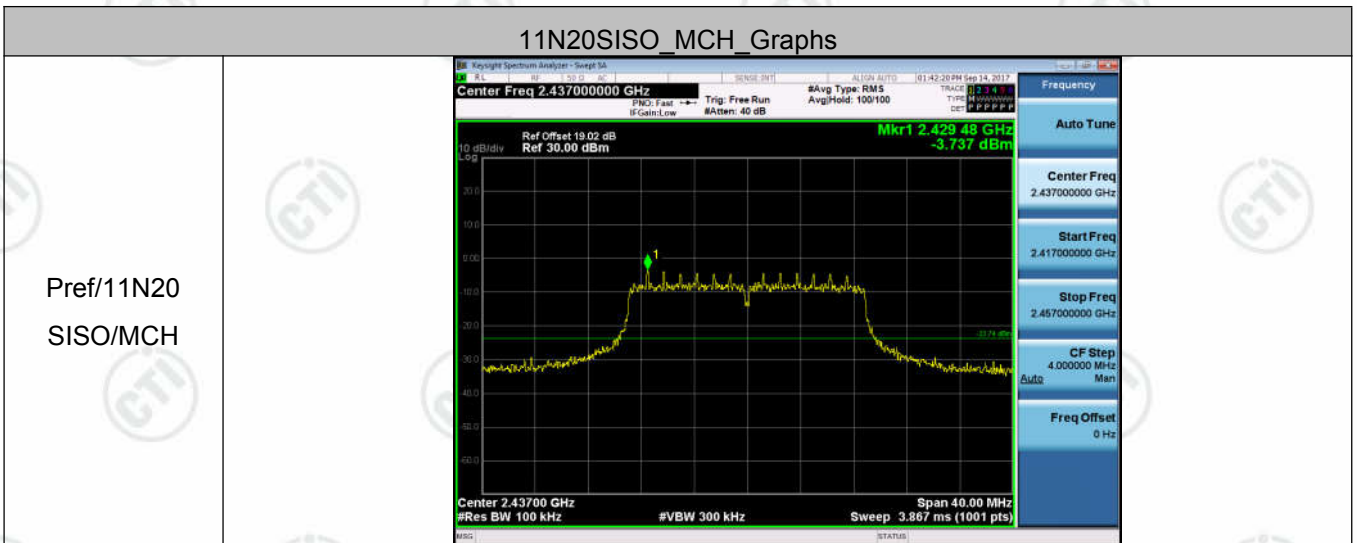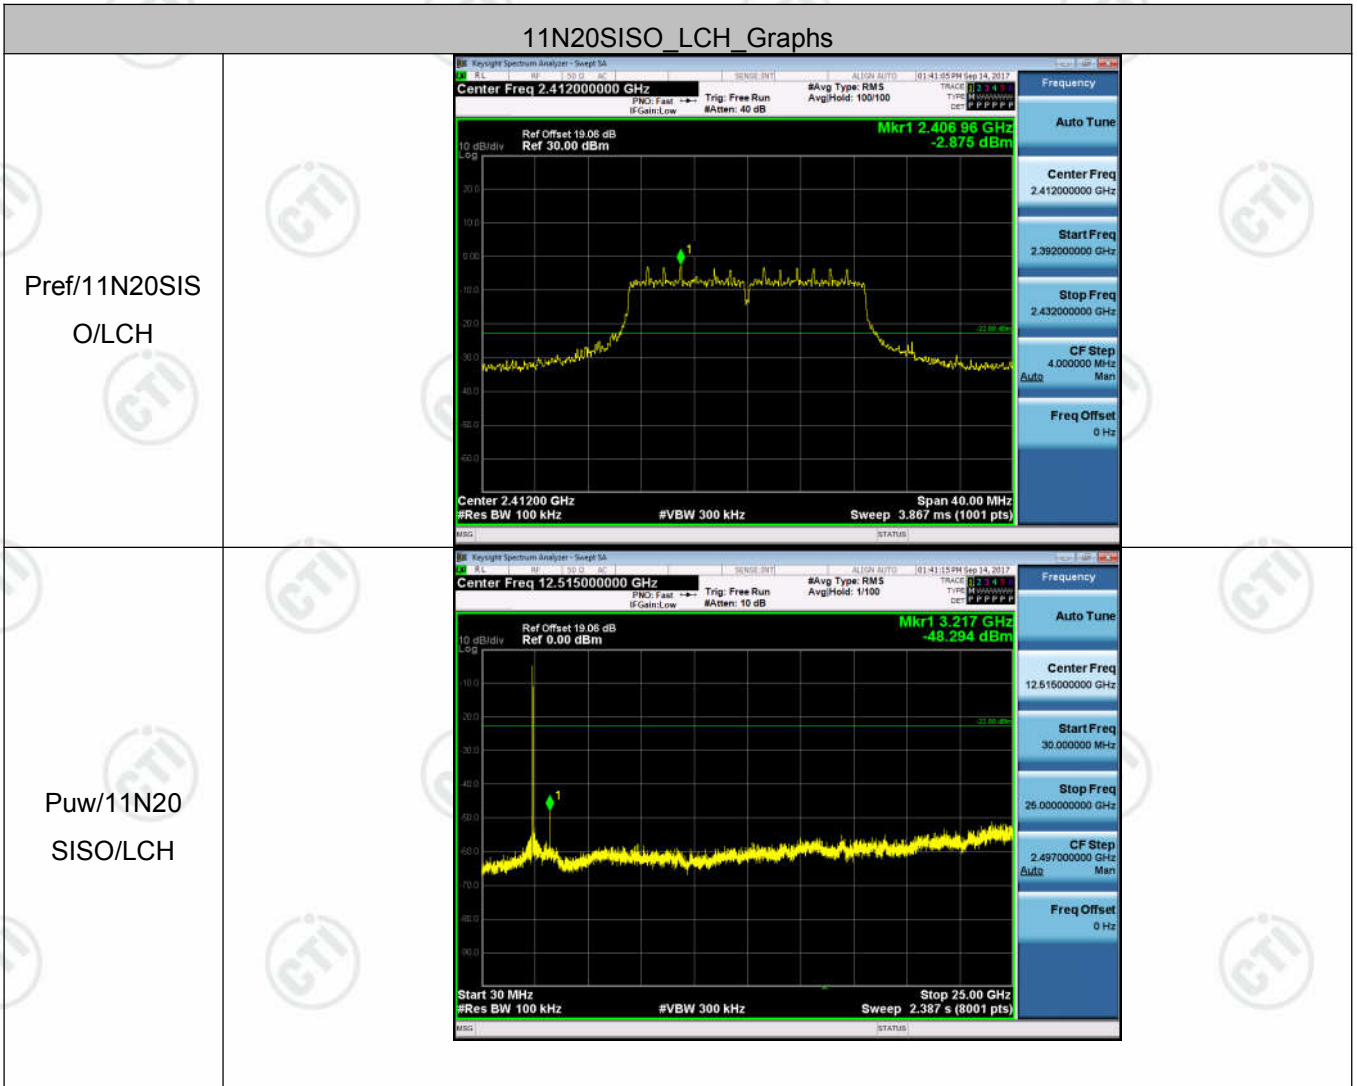



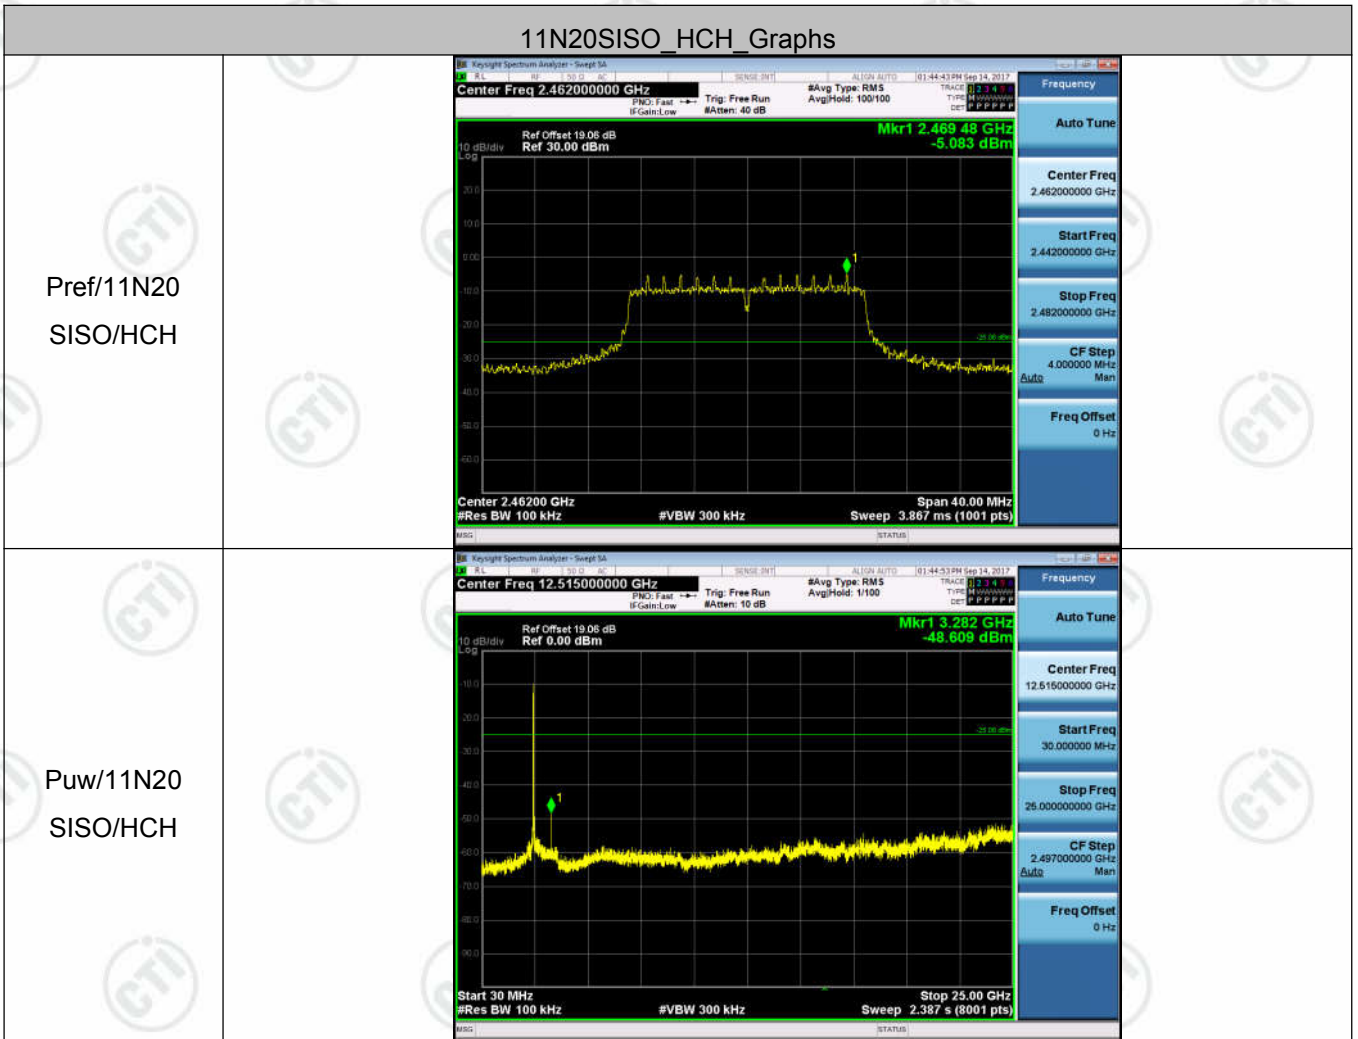
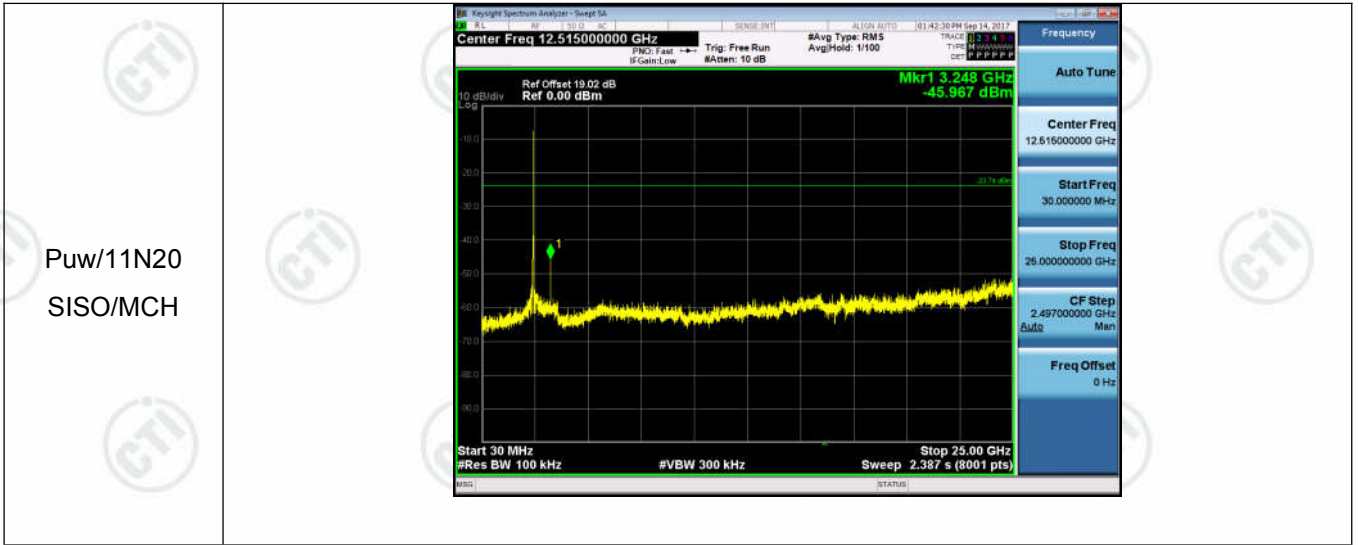




**Appendix E): Power Spectral Density
Result Table**

Mode	Channel	Power Spectral Density [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11B	LCH	-8.435	8	PASS
11B	MCH	-7.844	8	PASS
11B	HCH	-9.056	8	PASS
11G	LCH	-17.602	8	PASS
11G	MCH	-18.206	8	PASS
11G	HCH	-19.109	8	PASS
11N20SISO	LCH	-17.062	8	PASS
11N20SISO	MCH	-17.462	8	PASS
11N20SISO	HCH	-20.106	8	PASS

Test Graph

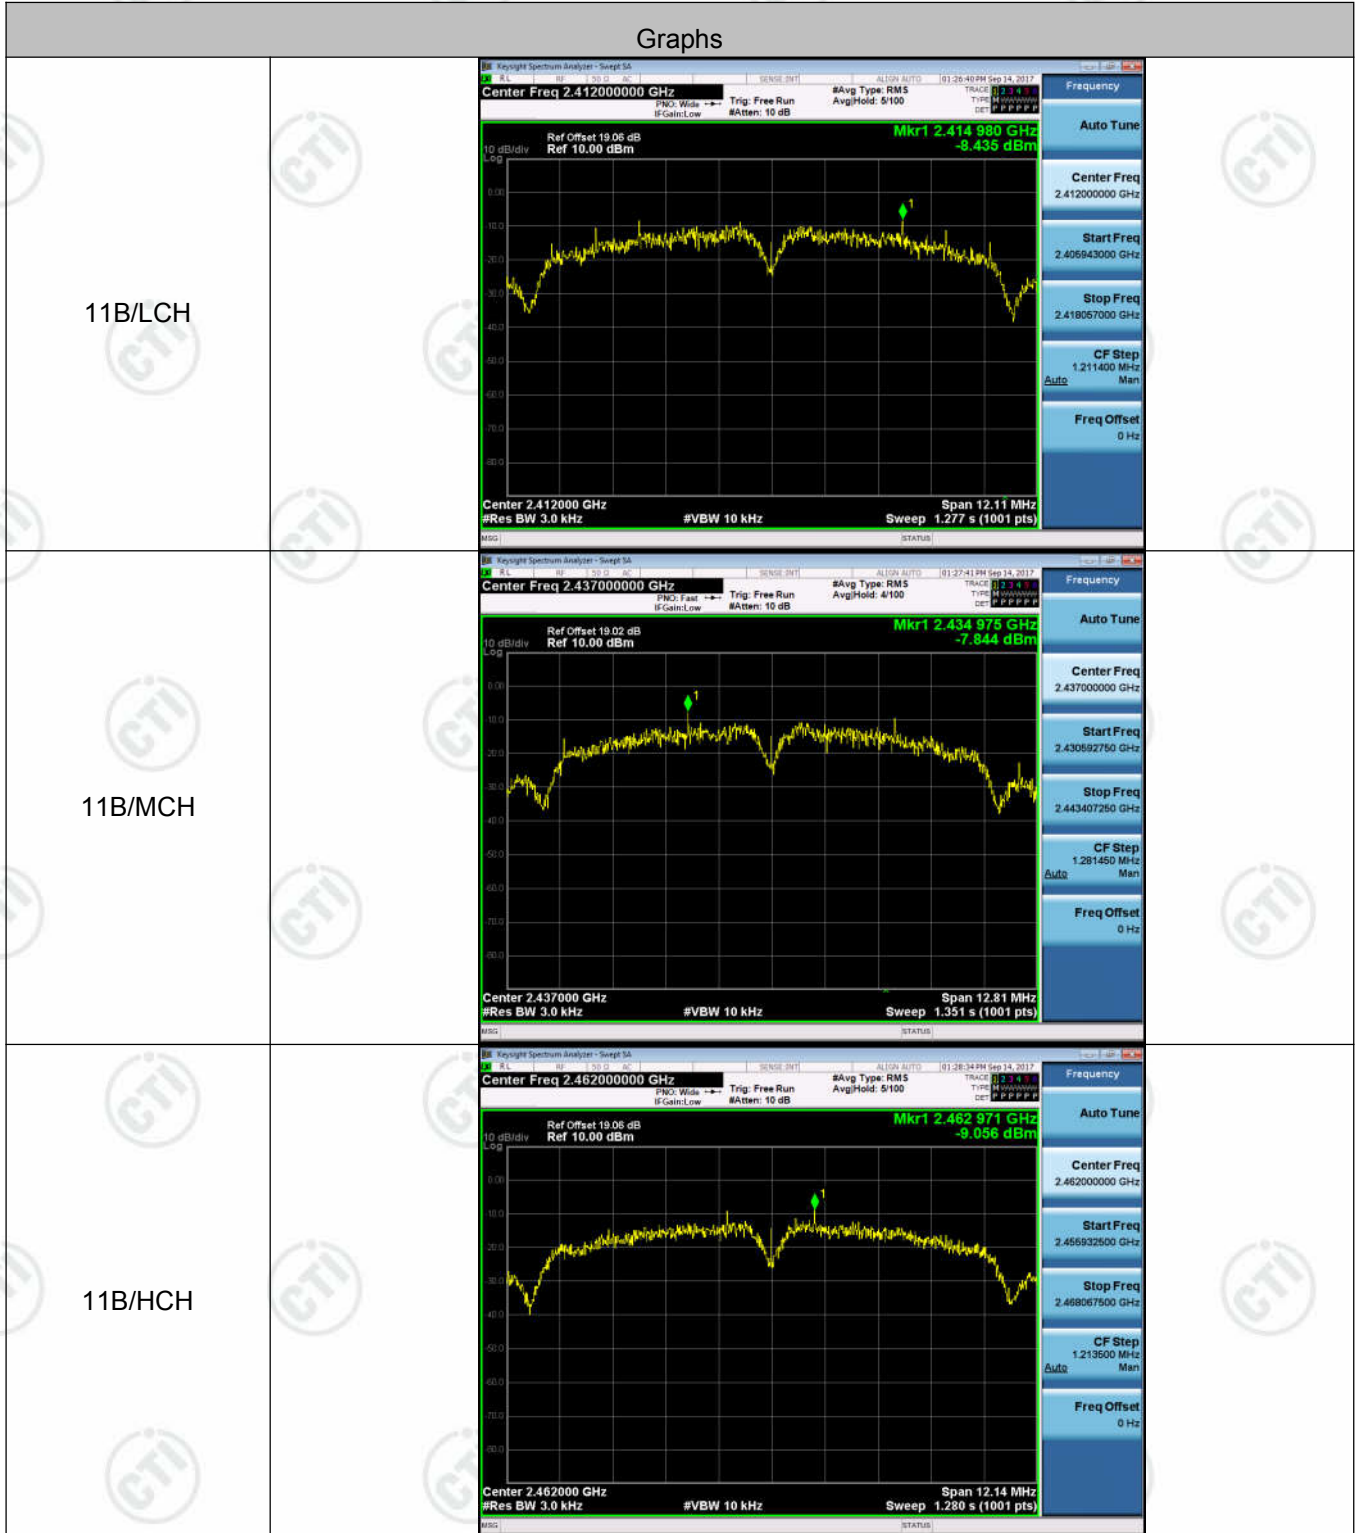
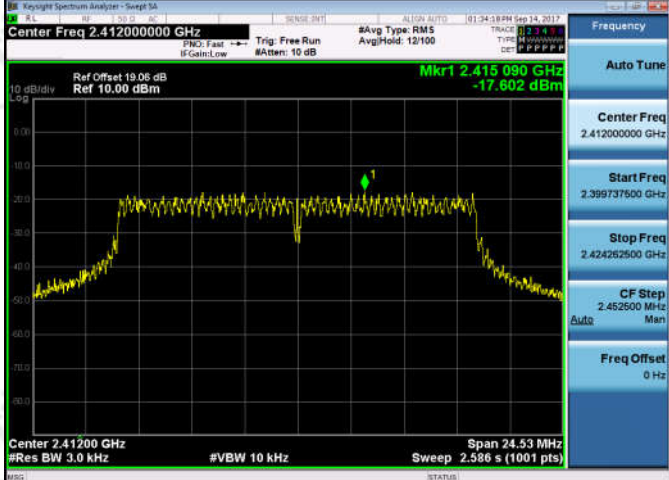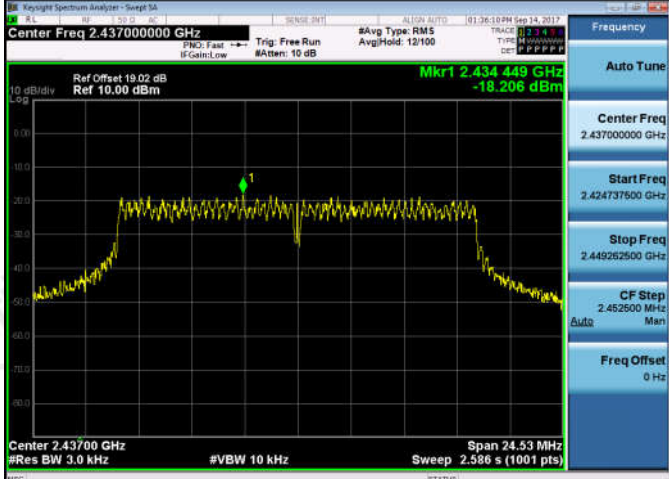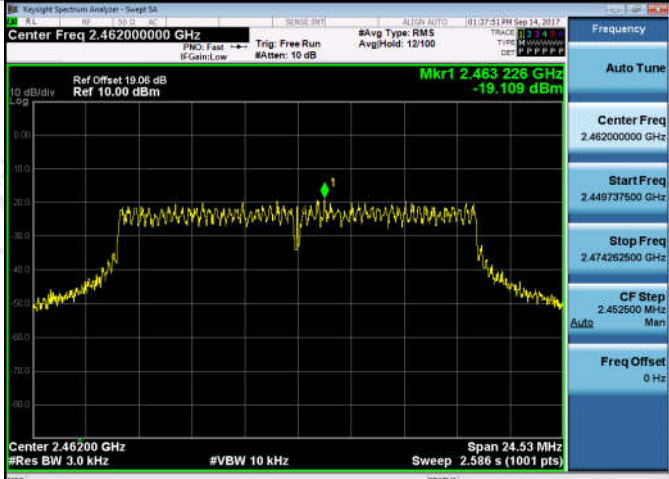
<p>11G/LCH</p>	
<p>11G/MCH</p>	
<p>11G/HCH</p>	
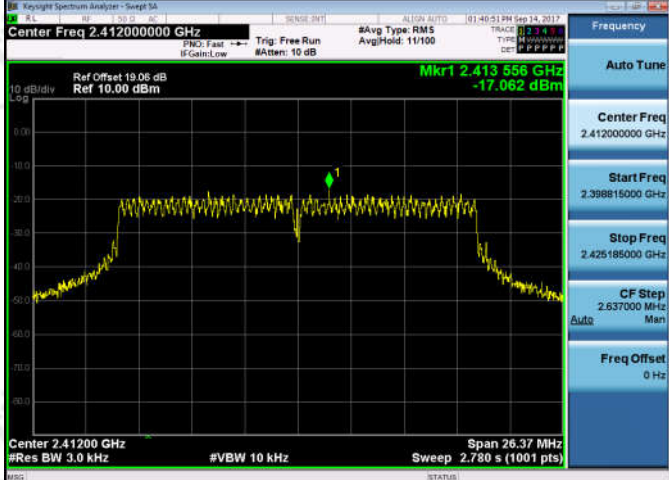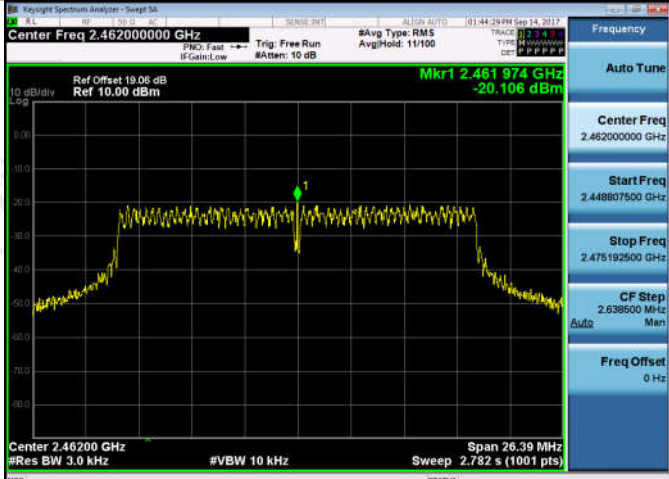
<p>11N20SISO/LCH</p>	
<p>11N20SISO/MCH</p>	
<p>11N20SISO/HCH</p>	

Appendix F): Antenna Requirement

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 3dBi.

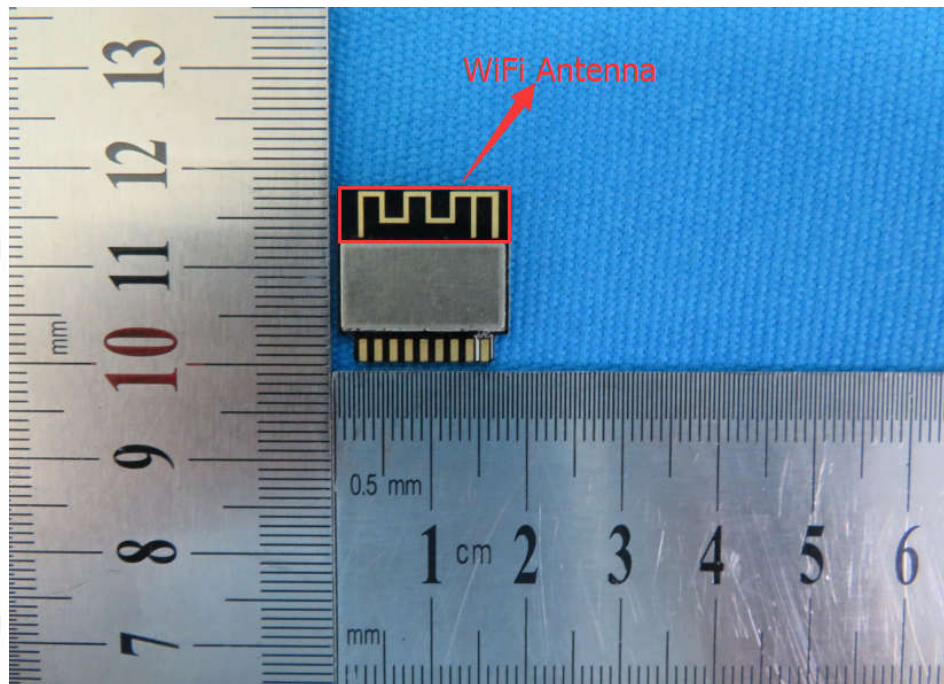

Appendix G): AC Power Line Conducted Emission

<p>Test Procedure:</p>	<p>Test frequency range :150KHz-30MHz</p> <ol style="list-style-type: none"> 1)The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement. 														
<p>Limit:</p>	<table border="1" data-bbox="464 1155 1331 1375"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency</p>	Frequency range (MHz)	Limit (dB μ V)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dB μ V)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													


Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


Live line:

80.0 dBuV

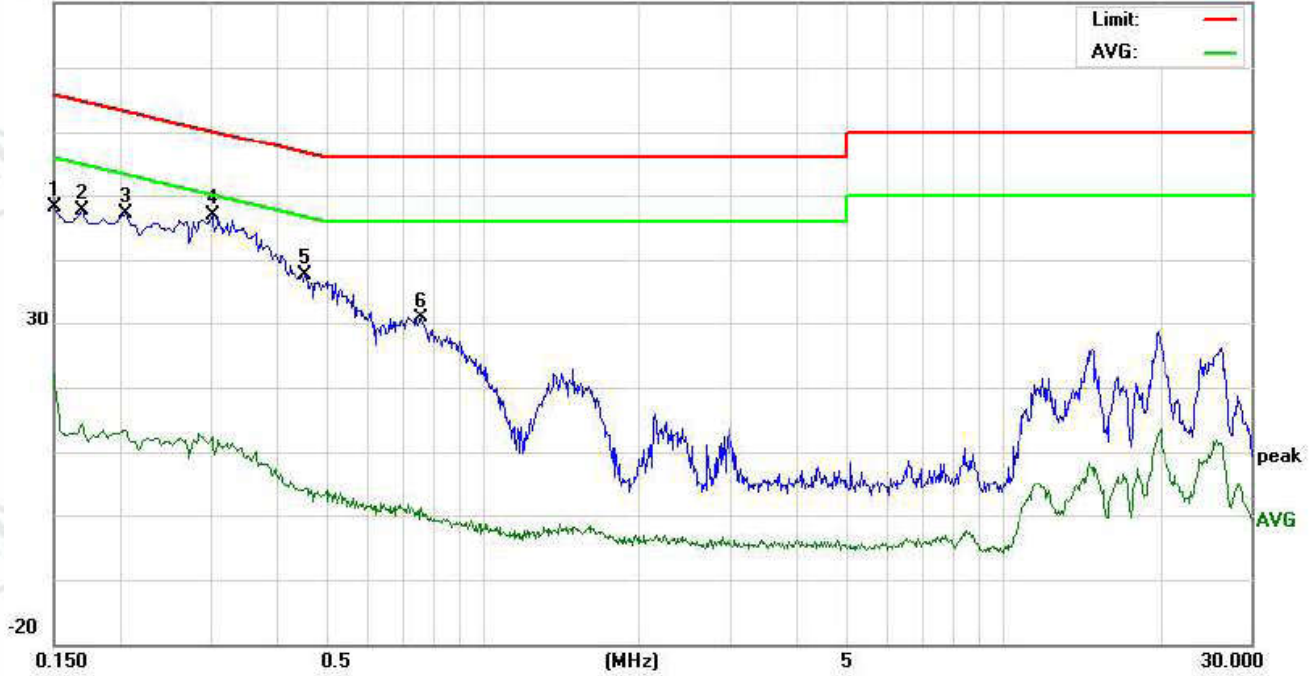

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1499	38.33	36.78	12.31	9.77	48.10	46.55	22.08	66.00	56.00	-19.45	-33.92	P	
2	0.1693	37.77	35.87	4.52	9.74	47.51	45.61	14.26	64.99	54.99	-19.38	-40.73	P	
3	0.2048	37.34	35.14	3.79	9.71	47.05	44.85	13.50	63.41	53.41	-18.56	-39.91	P	
4	0.3017	37.08	35.42	2.51	9.78	46.86	45.20	12.29	60.19	50.19	-14.99	-37.90	P	
5	0.4561	27.89	25.91	-5.59	9.73	37.62	35.64	4.14	56.76	46.76	-21.12	-42.62	P	
6	0.7586	21.23	19.37	-8.59	9.74	30.97	29.11	1.15	56.00	46.00	-26.89	-44.85	P	

Neutral line:
80.0 dBuV

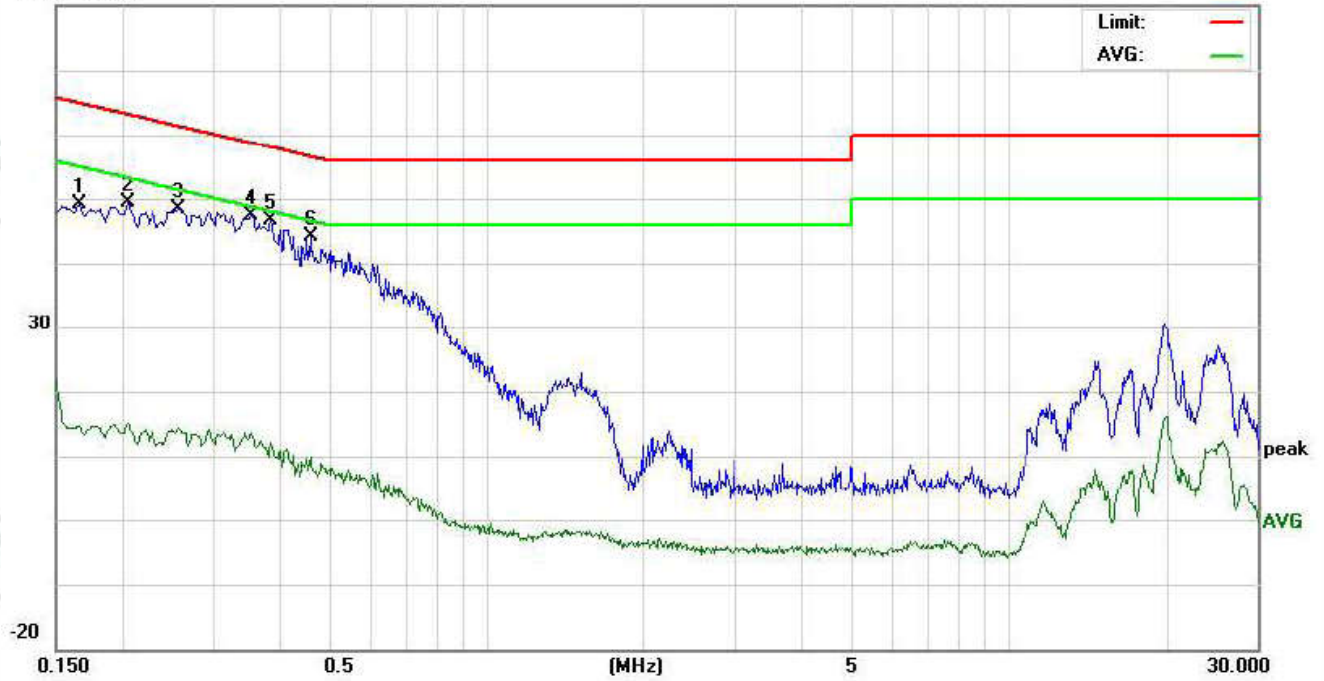

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1658	39.30	37.91	4.95	9.75	49.05	47.66	14.70	65.16	55.16	-17.50	-40.46	P	
2	0.2048	39.55	37.15	5.45	9.71	49.26	46.86	15.16	63.41	53.41	-16.55	-38.25	P	
3	0.2574	38.54	36.34	4.56	9.75	48.29	46.09	14.31	61.51	51.51	-15.42	-37.20	P	
4	0.3537	37.72	35.61	3.86	9.76	47.48	45.37	13.62	58.87	48.87	-13.50	-35.25	P	
5	0.3850	36.88	35.25	2.37	9.75	46.63	45.00	12.12	58.17	48.17	-13.17	-36.05	P	
6	0.4610	34.41	32.54	0.18	9.73	44.14	42.27	9.91	56.67	46.67	-14.40	-36.76	P	

Notes:


1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.

Appendix H): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120kHz</td> <td>300kHz</td> <td>Quasi-peak</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average</td> </tr> </tbody> </table>	Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak	Above 1GHz	Peak	1MHz	3MHz	Peak	Peak	1MHz	10Hz	Average	
Frequency	Detector	RBW	VBW	Remark																	
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak																	
Above 1GHz	Peak	1MHz	3MHz	Peak																	
	Peak	1MHz	10Hz	Average																	
Test Procedure:	<p>Below 1GHz test procedure as below:</p> <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel <p>Above 1GHz test procedure as below:</p> <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. 																				
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBμV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>40.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>43.5</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>46.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>54.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>54.0</td> <td>Average Value</td> </tr> <tr> <td>74.0</td> <td>Peak Value</td> </tr> </tbody> </table>	Frequency	Limit (dB μ V/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	74.0	Peak Value
Frequency	Limit (dB μ V/m @3m)	Remark																			
30MHz-88MHz	40.0	Quasi-peak Value																			
88MHz-216MHz	43.5	Quasi-peak Value																			
216MHz-960MHz	46.0	Quasi-peak Value																			
960MHz-1GHz	54.0	Quasi-peak Value																			
Above 1GHz	54.0	Average Value																			
	74.0	Peak Value																			


Test plot as follows:

Worse case mode:	802.11b (11Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

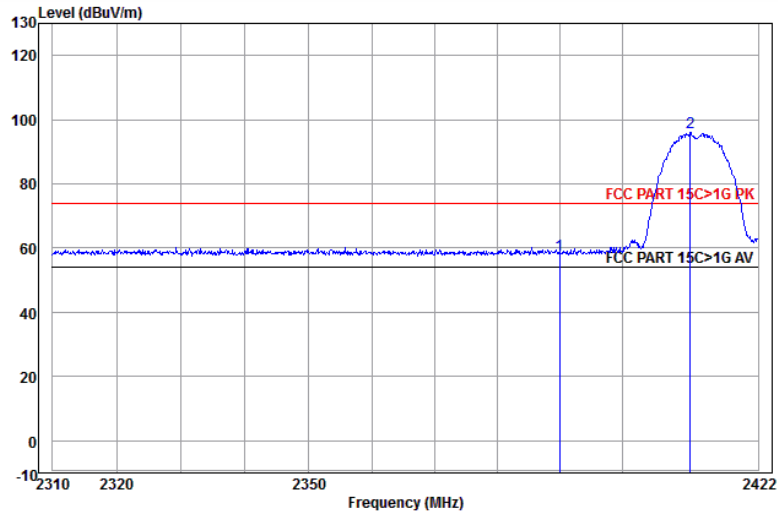


	Ant Freq	Cable Factor	Cable Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	22.45	58.05	74.00	-15.95	Horizontal	
2 pp	2411.016	32.58	3.08	60.33	95.99	74.00	21.99	Horizontal	

Worse case mode:	802.11b (11Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Average

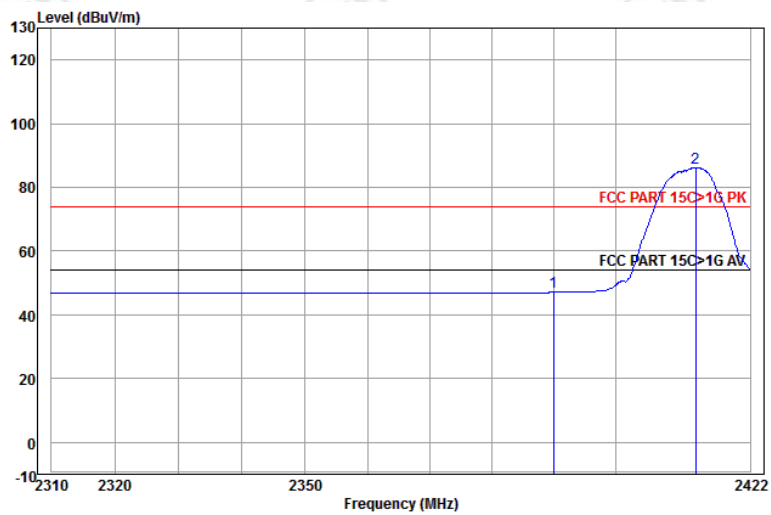


	Ant Freq	Cable Factor	Cable Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	11.47	47.07	54.00	-6.93	Horizontal	Average
2 pp	2413.072	32.58	3.08	50.51	86.17	54.00	32.17	Horizontal	Average

Worse case mode:	802.11b (11Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

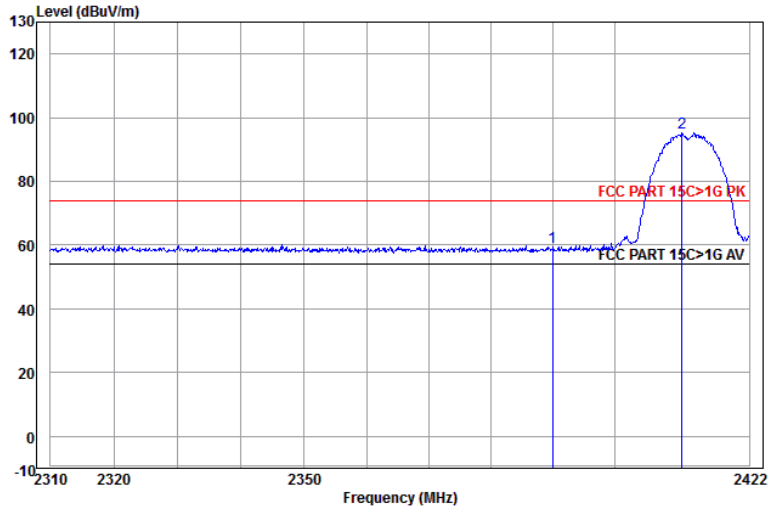


	Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit	Over	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	23.89	59.49	74.00	-14.51	Vertical	
2 pp	2411.016	32.58	3.08	59.48	95.14	74.00	21.14	Vertical	

Worse case mode:	802.11b (11Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Average

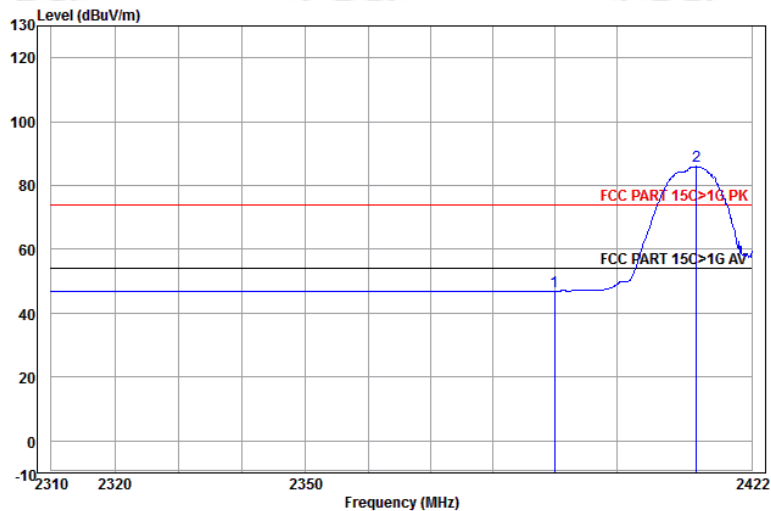


	Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit	Over	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	11.41	47.01	54.00	-6.99	Vertical	Average
2 pp	2412.958	32.58	3.08	50.28	85.94	54.00	31.94	Vertical	Average

Worse case mode:	802.11b (11Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

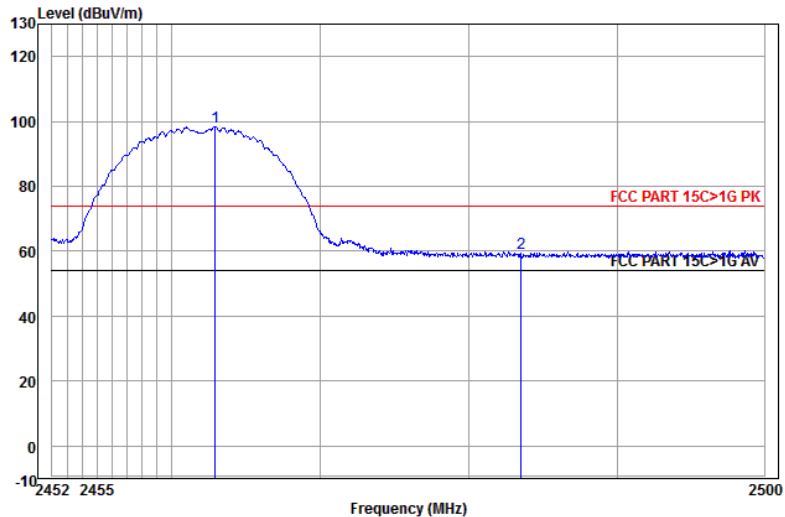


	Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2462.910	32.68	3.11	62.62	98.41	74.00	24.41	Horizontal	
2	2483.500	32.71	3.12	23.64	59.47	74.00	-14.53	Horizontal	

Worse case mode:	802.11b (11Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Average

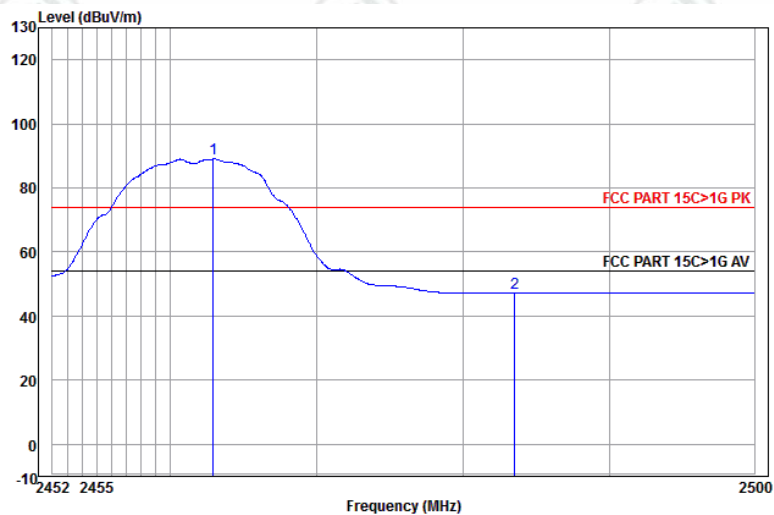


	Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2462.910	32.68	3.11	53.21	89.00	54.00	35.00	Horizontal	Average
2	2483.500	32.71	3.12	11.39	47.22	54.00	-6.78	Horizontal	Average

Worse case mode:	802.11b (11Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

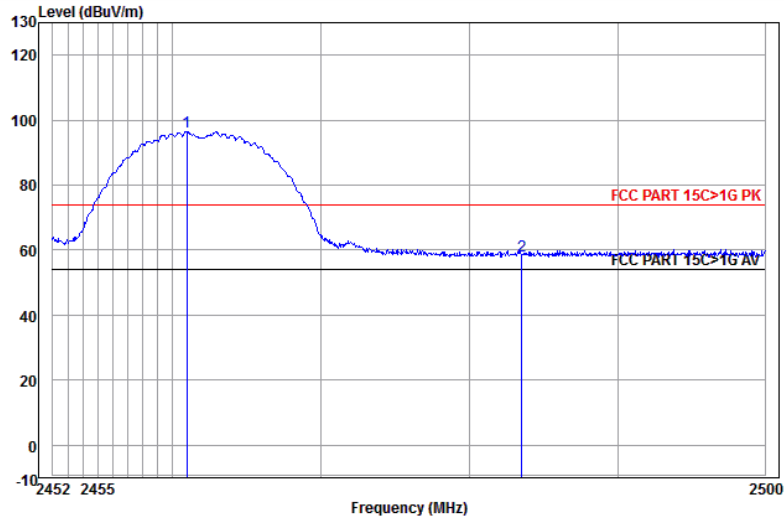


	Ant Freq	Cable Factor	Cable Loss	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2460.953	32.67	3.11	60.72	96.50	74.00	22.50	Vertical
2	2483.500	32.71	3.12	22.59	58.42	74.00	-15.58	Vertical

Worse case mode:	802.11b (11Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Average

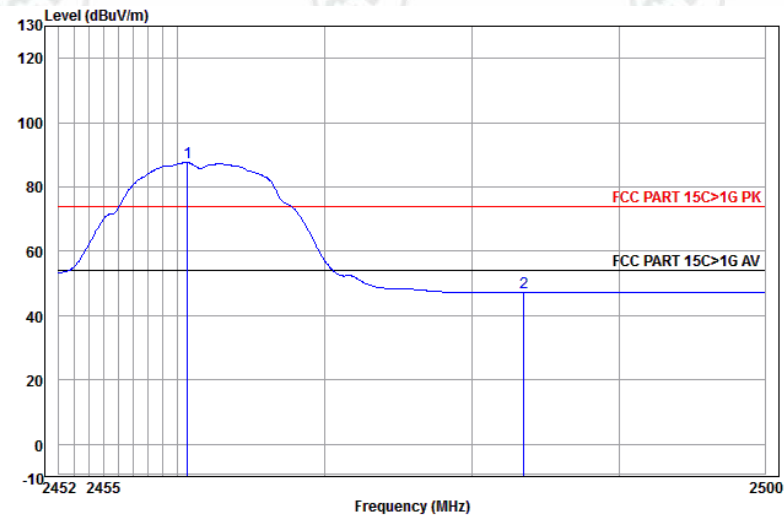


	Ant Freq	Cable Factor	Cable Loss	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2460.667	32.67	3.11	52.01	87.79	54.00	33.79	Vertical Average
2	2483.500	32.71	3.12	11.41	47.24	54.00	-6.76	Vertical Average

Worse case mode:	802.11g (6Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

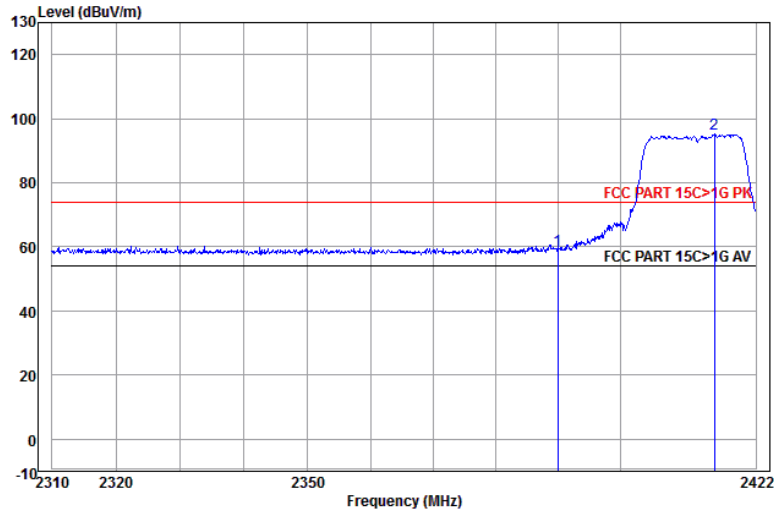


	Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit	Over	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	23.61	59.21	74.00	-14.79	Horizontal	
2 pp	2415.244	32.58	3.08	59.47	95.13	74.00	21.13	Horizontal	

Worse case mode:	802.11g (6Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Average

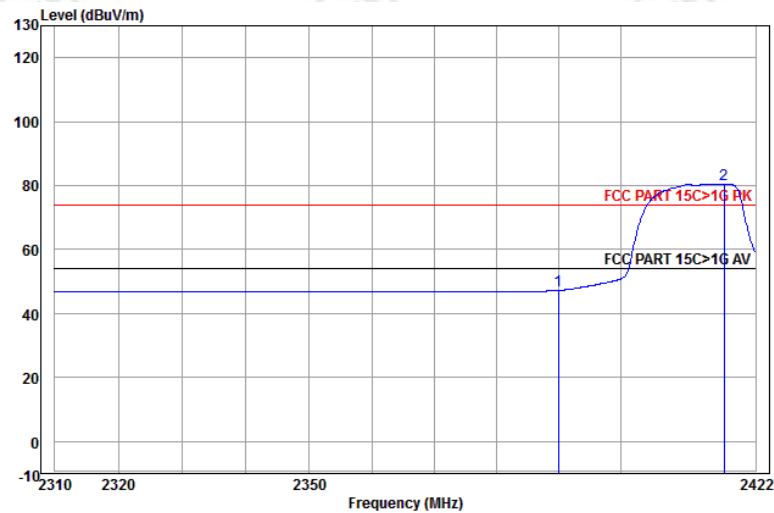


	Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit	Over	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	11.67	47.27	54.00	-6.73	Horizontal	Average
2 pp	2416.845	32.59	3.08	44.79	80.46	54.00	26.46	Horizontal	Average

Worse case mode:	802.11g (6Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

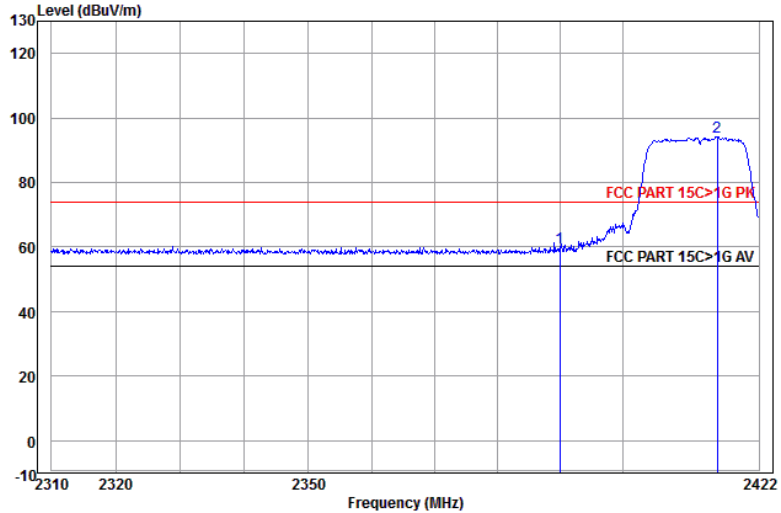


	Ant Freq	Factor	Cable Loss	Read Level	Level	Limit	Over	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	24.11	59.71	74.00	-14.29	Vertical	
2 pp	2415.244	32.58	3.08	58.62	94.28	74.00	20.28	Vertical	

Worse case mode:	802.11g (6Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Average

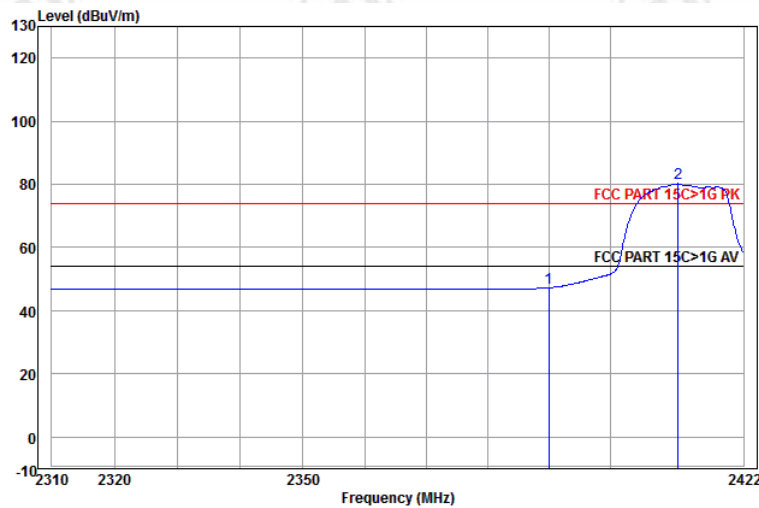


	Ant Freq	Factor	Cable Loss	Read Level	Level	Limit	Over	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	11.67	47.27	54.00	-6.73	Vertical	Average
2 pp	2411.245	32.58	3.08	44.57	80.23	54.00	26.23	Vertical	Average

Worse case mode:	802.11g (6Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

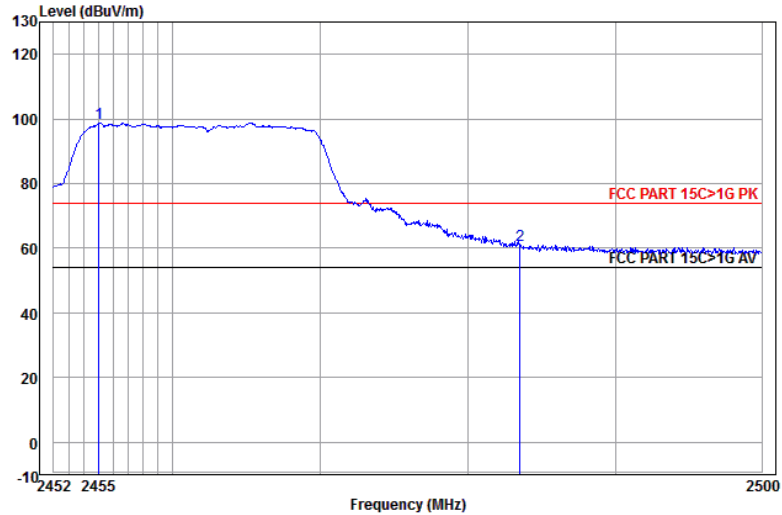


	Ant Freq	Cable Factor	Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2455.044	32.66	3.10	62.97	98.73	74.00	24.73	Horizontal	
2	2483.500	32.71	3.12	25.22	61.05	74.00	-12.95	Horizontal	

Worse case mode:	802.11g (6Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Average

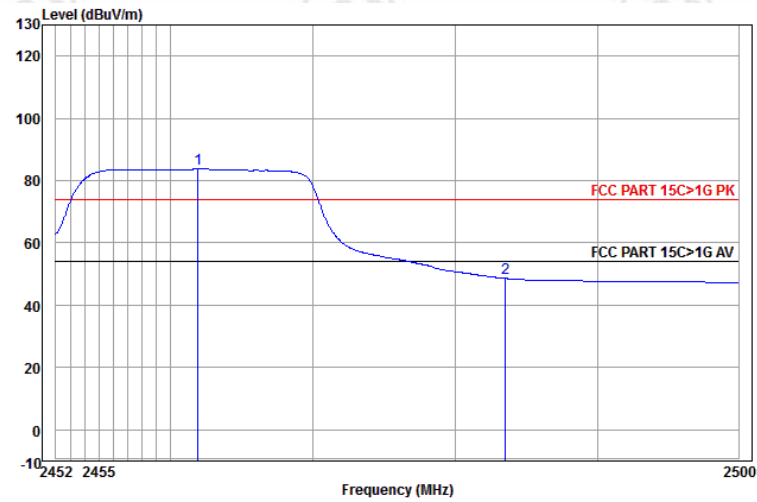


	Ant Freq	Cable Factor	Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2461.907	32.67	3.11	48.14	83.92	54.00	29.92	Horizontal	Average
2	2483.500	32.71	3.12	12.74	48.57	54.00	-5.43	Horizontal	Average

Worse case mode:	802.11g (6Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

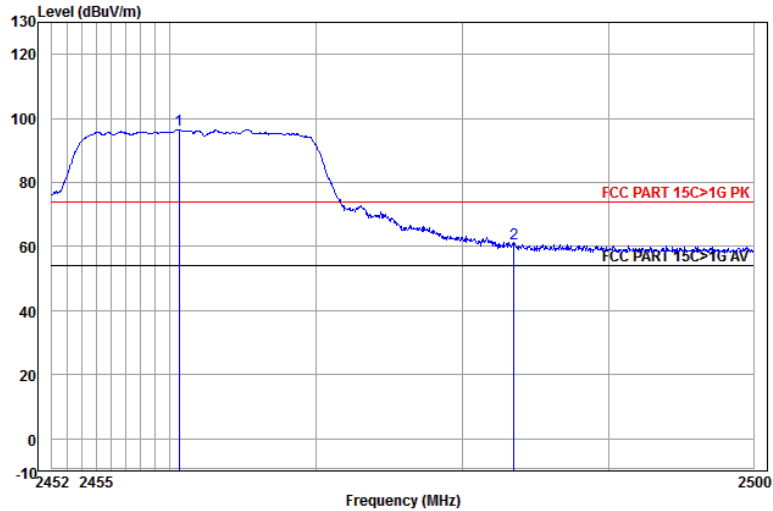


	Ant Freq	Cable Factor	Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	pp 2460.619	32.67	3.11	60.69	96.47	74.00	22.47	Vertical	
2	2483.500	32.71	3.12	25.08	60.91	74.00	-13.09	Vertical	

Worse case mode:	802.11g (6Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Average

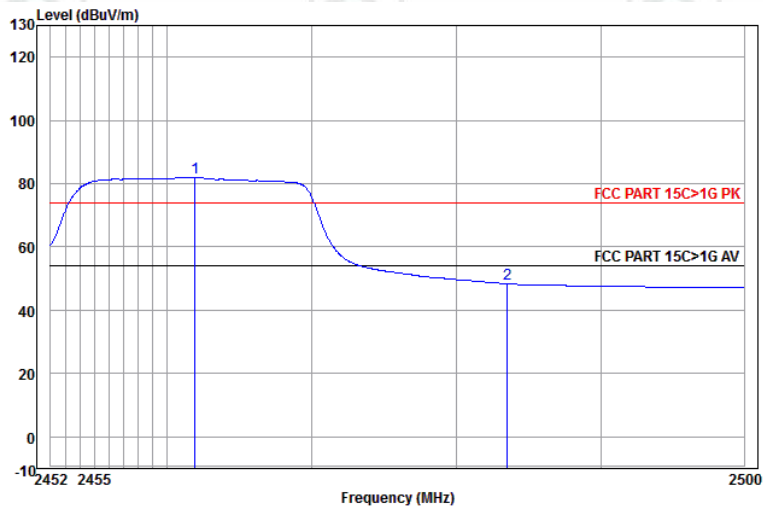


	Ant Freq	Cable Factor	Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	pp 2461.907	32.67	3.11	46.27	82.05	54.00	28.05	Vertical	Average
2	2483.500	32.71	3.12	12.53	48.36	54.00	-5.64	Vertical	Average

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

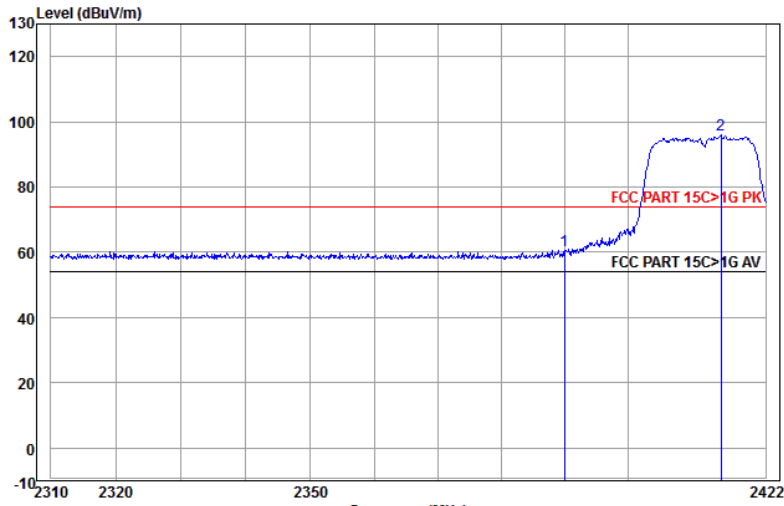


	Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	24.81	60.41	74.00	-13.59	Horizontal	
2 pp	2414.901	32.58	3.08	60.26	95.92	74.00	21.92	Horizontal	

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Average

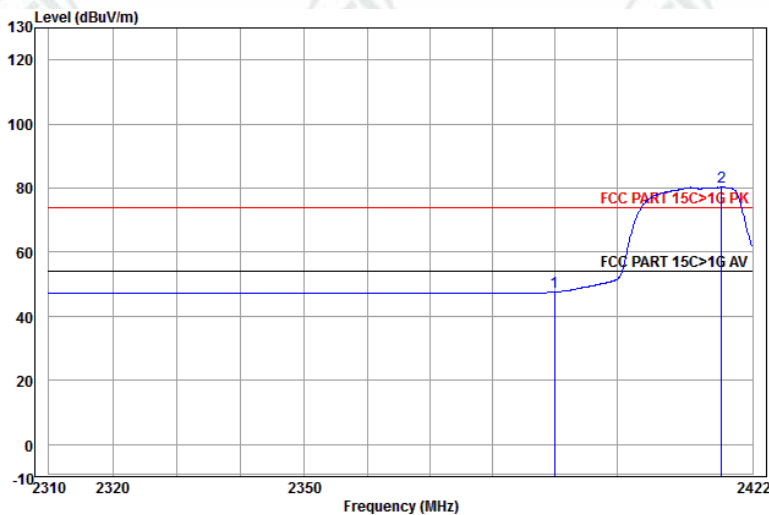


	Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	12.01	47.61	54.00	-6.39	Horizontal	Average
2 pp	2416.960	32.59	3.08	44.61	80.28	54.00	26.28	Horizontal	Average

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

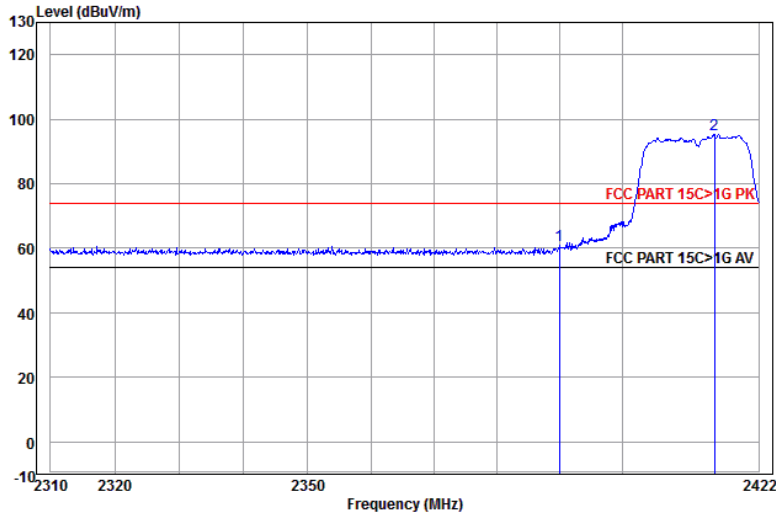


	Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	25.35	60.95	74.00	-13.05	Vertical	
2 pp	2414.901	32.58	3.08	59.63	95.29	74.00	21.29	Vertical	

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Average

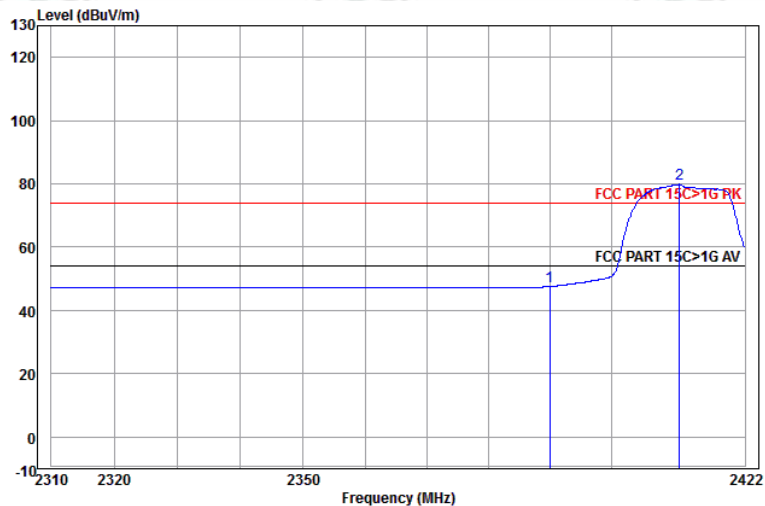


	Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	11.99	47.59	54.00	-6.41	Vertical	Average
2 pp	2411.245	32.58	3.08	44.22	79.88	54.00	25.88	Vertical	Average

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

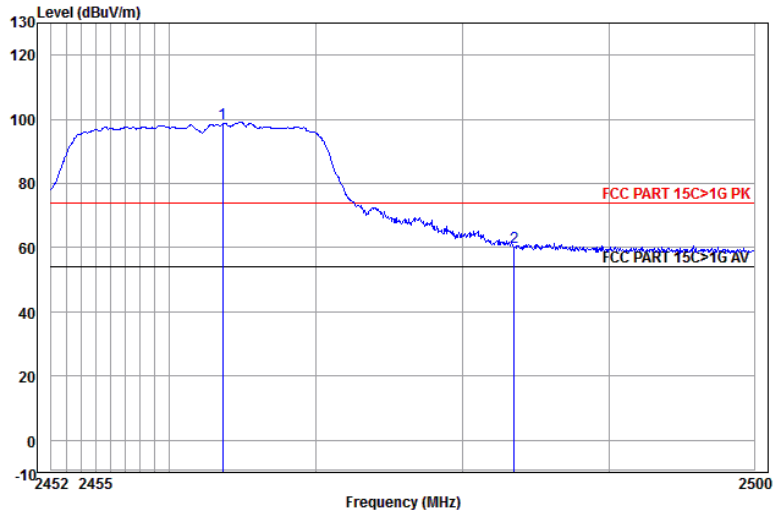


	Ant Freq	Cable Factor	Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2463.626	32.68	3.11	63.00	98.79	74.00	24.79	Horizontal	
2	2483.500	32.71	3.12	24.50	60.33	74.00	-13.67	Horizontal	

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Average

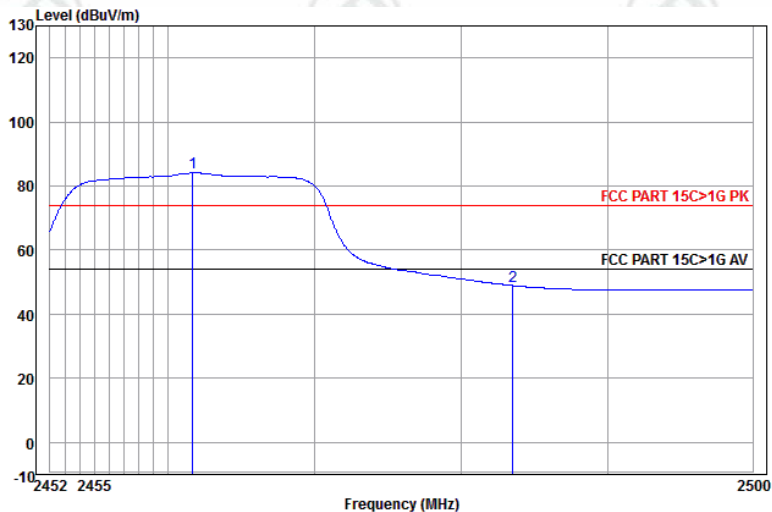


	Ant Freq	Cable Factor	Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2461.669	32.67	3.11	48.48	84.26	54.00	30.26	Horizontal	Average
2	2483.500	32.71	3.12	13.08	48.91	54.00	-5.09	Horizontal	Average

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

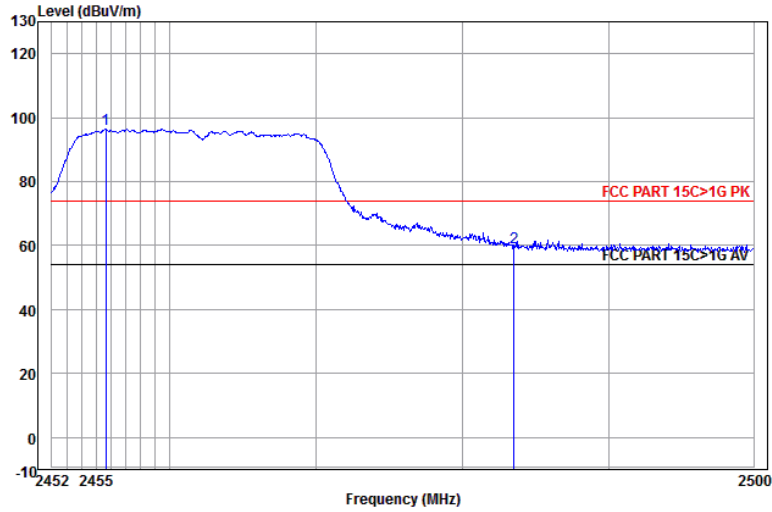

	Ant Freq	Cable Factor	Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2455.663	32.66	3.10	60.74	96.50	74.00	22.50	Vertical	
2	2483.500	32.71	3.12	23.47	59.30	74.00	-14.70	Vertical	

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Average

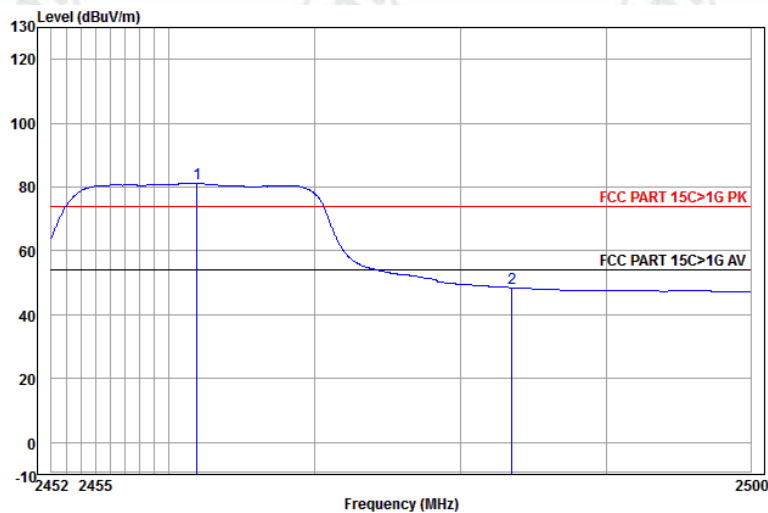

	Ant Freq	Cable Factor	Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2461.907	32.67	3.11	45.53	81.31	54.00	27.31	Vertical	Average
2	2483.500	32.71	3.12	12.65	48.48	54.00	-5.52	Vertical	Average

Note:

1) Through Pre-scan transmitting mode and charge-transmitter mode with all kind of modulation and data rate, found the 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20), and then Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor


Appendix I): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Test Procedure:					
Below 1GHz test procedure as below:					
<p>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>					
Above 1GHz test procedure as below:					
<p>g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter)..</p> <p>h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p>					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
<p>Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.</p>					

Radiated Spurious Emissions test Data:
Radiated Emission below 1GHz


30MHz~1GHz (QP)

Test mode:	Transmitting	Vertical
------------	--------------	----------

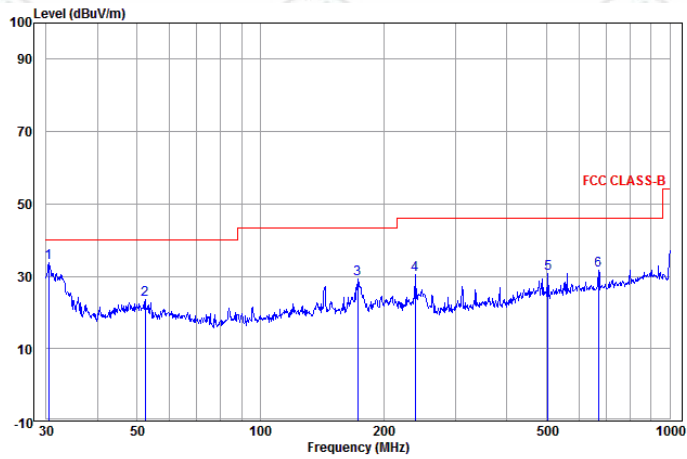

	Ant Freq	Cable Factor	Loss	Read Level	Level	Limit	Over	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	pp 30.424	11.99	0.09	21.61	33.69	40.00	-6.31	Vertical	QP
2	52.391	14.22	0.14	9.34	23.70	40.00	-16.30	Vertical	QP
3	173.205	10.15	0.86	18.14	29.15	43.50	-14.35	Vertical	QP
4	239.147	12.38	1.29	16.65	30.32	46.00	-15.68	Vertical	QP
5	504.706	16.99	1.52	12.37	30.88	46.00	-15.12	Vertical	QP
6	670.489	18.98	1.91	10.86	31.75	46.00	-14.25	Vertical	QP

Test mode:	Transmitting	Horizontal
------------	--------------	------------

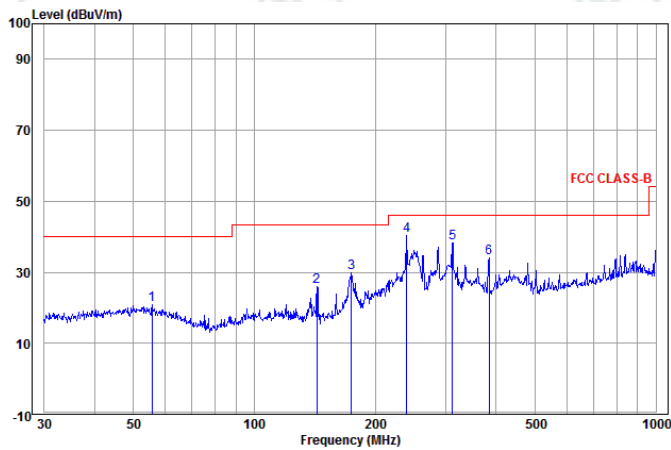

	Ant Freq	Cable Factor	Loss	Read Level	Level	Limit	Over	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	55.609	13.73	0.17	6.85	20.75	40.00	-19.25	Horizontal	QP
2	143.326	9.22	0.61	15.99	25.82	43.50	-17.68	Horizontal	QP
3	174.424	10.22	0.87	18.88	29.97	43.50	-13.53	Horizontal	QP
4	pp 239.987	12.40	1.30	26.77	40.47	46.00	-5.53	Horizontal	QP
5	311.087	13.64	1.13	23.54	38.31	46.00	-7.69	Horizontal	QP
6	383.932	14.95	1.32	17.90	34.17	46.00	-11.83	Horizontal	QP

Transmitter Emission above 1GHz

Test mode: 802.11b(11Mbps)			Test Frequency: 2412MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Final test level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1346.929	30.56	2.08	44.18	47.23	35.69	74.00	-38.31	Pass	Horizontal
1823.477	31.43	2.66	43.66	47.22	37.65	74.00	-36.35	Pass	Horizontal
4824.000	34.73	6.02	44.60	48.15	44.30	74.00	-29.70	Pass	Horizontal
5940.967	35.86	7.38	44.51	45.72	44.45	74.00	-29.55	Pass	Horizontal
7236.000	36.42	6.94	44.80	43.01	41.57	74.00	-32.43	Pass	Horizontal
9648.000	37.93	7.01	45.57	42.09	41.46	74.00	-32.54	Pass	Horizontal
1182.943	30.18	1.83	44.41	47.47	35.07	74.00	-38.93	Pass	Vertical
1533.648	30.93	2.33	43.96	47.69	36.99	74.00	-37.01	Pass	Vertical
4824.000	34.73	6.02	44.60	46.62	42.77	74.00	-31.23	Pass	Vertical
5940.967	35.86	7.38	44.51	46.12	44.85	74.00	-29.15	Pass	Vertical
7236.000	36.42	6.94	44.80	43.41	41.97	74.00	-32.03	Pass	Vertical
9648.000	37.93	7.01	45.57	41.13	40.50	74.00	-33.50	Pass	Vertical

Test mode: 802.11b(11Mbps)			Test Frequency: 2437MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Final test level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1306.407	30.47	2.02	44.24	47.15	35.40	74.00	-38.60	Pass	Horizontal
1809.605	31.41	2.65	43.67	47.11	37.50	74.00	-36.50	Pass	Horizontal
4874.000	34.84	6.12	44.60	48.98	45.34	74.00	-28.66	Pass	Horizontal
6363.645	36.09	7.34	44.54	46.66	45.55	74.00	-28.45	Pass	Horizontal
7311.000	36.43	6.86	44.86	43.58	42.01	74.00	-31.99	Pass	Horizontal
9748.000	38.03	7.10	45.55	42.54	42.12	74.00	-31.88	Pass	Horizontal
1222.743	30.28	1.90	44.35	46.95	34.78	74.00	-39.22	Pass	Vertical
1795.839	31.39	2.63	43.69	46.42	36.75	74.00	-37.25	Pass	Vertical
4874.000	34.84	6.12	44.60	50.58	46.94	74.00	-27.06	Pass	Vertical
6412.427	36.12	7.33	44.54	45.19	44.10	74.00	-29.90	Pass	Vertical
7311.000	36.43	6.86	44.86	43.07	41.50	74.00	-32.50	Pass	Vertical
9748.000	38.03	7.10	45.55	42.06	41.64	74.00	-32.36	Pass	Vertical

Test mode: 802.11b(11Mbps)			Test Frequency: 2462MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Final test level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1280.072	30.41	1.98	44.27	47.47	35.59	74.00	-38.41	Pass	Horizontal
1786.719	31.37	2.62	43.70	46.94	37.23	74.00	-36.77	Pass	Horizontal
4924.000	34.94	6.22	44.60	53.31	49.87	74.00	-24.13	Pass	Horizontal
6396.125	36.11	7.34	44.54	45.54	44.45	74.00	-29.55	Pass	Horizontal
7386.000	36.44	6.78	44.92	43.81	42.11	74.00	-31.89	Pass	Horizontal
9848.000	38.14	7.19	45.53	41.81	41.61	74.00	-32.39	Pass	Horizontal
1329.894	30.52	2.06	44.21	46.68	35.05	74.00	-38.95	Pass	Vertical
1958.189	31.64	2.80	43.54	46.09	36.99	74.00	-37.01	Pass	Vertical
4924.000	34.94	6.22	44.60	51.85	48.41	74.00	-25.59	Pass	Vertical
6428.771	36.12	7.33	44.54	45.50	44.41	74.00	-29.59	Pass	Vertical
7386.000	36.44	6.78	44.92	44.22	42.52	74.00	-31.48	Pass	Vertical
9848.000	38.14	7.19	45.53	42.17	41.97	74.00	-32.03	Pass	Vertical

Test mode: 802.11g(6Mbps)			Test Frequency: 2412MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Final test level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1247.899	30.34	1.93	44.32	47.15	35.10	74.00	-38.90	Pass	Horizontal
1764.123	31.34	2.60	43.72	47.24	37.46	74.00	-36.54	Pass	Horizontal
4824.000	34.73	6.02	44.60	43.67	39.82	74.00	-34.18	Pass	Horizontal
6412.427	36.12	7.33	44.54	45.68	44.59	74.00	-29.41	Pass	Horizontal
7236.000	36.42	6.94	44.80	42.77	41.33	74.00	-32.67	Pass	Horizontal
9648.000	37.93	7.01	45.57	41.44	40.81	74.00	-33.19	Pass	Horizontal
1303.086	30.46	2.02	44.24	45.76	34.00	74.00	-40.00	Pass	Vertical
1791.273	31.38	2.63	43.69	45.76	36.08	74.00	-37.92	Pass	Vertical
4824.000	34.73	6.02	44.60	40.26	36.41	74.00	-37.59	Pass	Vertical
6396.125	36.11	7.34	44.54	45.73	44.64	74.00	-29.36	Pass	Vertical
7236.000	36.42	6.94	44.80	42.45	41.01	74.00	-32.99	Pass	Vertical
9648.000	37.93	7.01	45.57	40.70	40.07	74.00	-33.93	Pass	Vertical

Test mode: 802.11g(6Mbps)			Test Frequency: 2437MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Final test level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1303.086	30.46	2.02	44.24	47.19	35.43	74.00	-38.57	Pass	Horizontal
1805.005	31.40	2.64	43.68	46.78	37.14	74.00	-36.86	Pass	Horizontal
4874.000	34.84	6.12	44.60	43.38	39.74	74.00	-34.26	Pass	Horizontal
6379.864	36.10	7.34	44.54	45.99	44.89	74.00	-29.11	Pass	Horizontal
7319.964	36.43	6.85	44.87	44.15	42.56	74.00	-31.44	Pass	Horizontal
9748.000	38.03	7.10	45.55	41.41	40.99	74.00	-33.01	Pass	Horizontal
1216.534	30.27	1.89	44.36	46.53	34.33	74.00	-39.67	Pass	Vertical
1818.842	31.43	2.66	43.66	46.70	37.13	74.00	-36.87	Pass	Vertical
4874.000	34.84	6.12	44.60	43.91	40.27	74.00	-33.73	Pass	Vertical
6396.125	36.11	7.34	44.54	45.51	44.42	74.00	-29.58	Pass	Vertical
7311.000	36.43	6.86	44.86	44.23	42.66	74.00	-31.34	Pass	Vertical
9748.000	38.03	7.10	45.55	42.22	41.80	74.00	-32.20	Pass	Vertical

Test mode: 802.11g(6Mbps)			Test Frequency: 2462MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Final test level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1254.268	30.35	1.94	44.31	46.81	34.79	74.00	-39.21	Pass	Horizontal
1795.839	31.39	2.63	43.69	47.05	37.38	74.00	-36.62	Pass	Horizontal
4924.000	34.94	6.22	44.60	43.28	39.84	74.00	-34.16	Pass	Horizontal
5791.646	35.74	7.23	44.52	45.49	43.94	74.00	-30.06	Pass	Horizontal
7386.000	36.44	6.78	44.92	43.14	41.44	74.00	-32.56	Pass	Horizontal
9848.000	38.14	7.19	45.53	41.93	41.73	74.00	-32.27	Pass	Horizontal
1329.894	30.52	2.06	44.21	47.07	35.44	74.00	-38.56	Pass	Vertical
1809.605	31.41	2.65	43.67	46.62	37.01	74.00	-36.99	Pass	Vertical
4924.000	34.94	6.22	44.60	42.61	39.17	74.00	-34.83	Pass	Vertical
6412.427	36.12	7.33	44.54	45.19	44.10	74.00	-29.90	Pass	Vertical
7386.000	36.44	6.78	44.92	43.57	41.87	74.00	-32.13	Pass	Vertical
9848.000	38.14	7.19	45.53	41.21	41.01	74.00	-32.99	Pass	Vertical

Test mode: 802.11n(HT20)(6.5Mbps)			Test Frequency: 2412MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Final test level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1286.606	30.43	1.99	44.26	46.70	34.86	74.00	-39.14	Pass	Horizontal
1786.719	31.37	2.62	43.70	46.76	37.05	74.00	-36.95	Pass	Horizontal
4824.000	34.73	6.02	44.60	44.41	40.56	74.00	-33.44	Pass	Horizontal
5986.509	35.89	7.43	44.50	45.28	44.10	74.00	-29.90	Pass	Horizontal
7236.000	36.42	6.94	44.80	43.48	42.04	74.00	-31.96	Pass	Horizontal
9648.000	37.93	7.01	45.57	42.00	41.37	74.00	-32.63	Pass	Horizontal
1353.804	30.57	2.09	44.18	46.68	35.16	74.00	-38.84	Pass	Vertical
1782.177	31.37	2.62	43.70	47.16	37.45	74.00	-36.55	Pass	Vertical
4824.000	34.73	6.02	44.60	43.68	39.83	74.00	-34.17	Pass	Vertical
6363.645	36.09	7.34	44.54	44.72	43.61	74.00	-30.39	Pass	Vertical
7236.000	36.42	6.94	44.80	43.10	41.66	74.00	-32.34	Pass	Vertical
9648.000	37.93	7.01	45.57	42.05	41.42	74.00	-32.58	Pass	Vertical

Test mode: 802.11n(HT20)(6.5Mbps)			Test Frequency: 2437MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Final test level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1251.079	30.35	1.94	44.31	46.63	34.61	74.00	-39.39	Pass	Horizontal
1809.605	31.41	2.65	43.67	46.78	37.17	74.00	-36.83	Pass	Horizontal
4874.000	34.84	6.12	44.60	44.42	40.78	74.00	-33.22	Pass	Horizontal
5806.408	35.76	7.25	44.52	45.62	44.11	74.00	-29.89	Pass	Horizontal
7311.000	36.43	6.86	44.86	43.14	41.57	74.00	-32.43	Pass	Horizontal
9748.000	38.03	7.10	45.55	41.72	41.30	74.00	-32.70	Pass	Horizontal
1346.929	30.56	2.08	44.18	47.63	36.09	74.00	-37.91	Pass	Vertical
1791.273	31.38	2.63	43.69	47.67	37.99	74.00	-36.01	Pass	Vertical
4874.000	34.84	6.12	44.60	43.75	40.11	74.00	-33.89	Pass	Vertical
6412.427	36.12	7.33	44.54	46.43	45.34	74.00	-28.66	Pass	Vertical
7311.000	36.43	6.86	44.86	43.34	41.77	74.00	-32.23	Pass	Vertical
9748.000	38.03	7.10	45.55	41.75	41.33	74.00	-32.67	Pass	Vertical

Test mode: 802.11n(HT20)(6.5Mbps)			Test Frequency: 2462MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Final test level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1329.894	30.52	2.06	44.21	46.81	35.18	74.00	-38.82	Pass	Horizontal
1795.839	31.39	2.63	43.69	46.64	36.97	74.00	-37.03	Pass	Horizontal
4924.000	34.94	6.22	44.60	43.65	40.21	74.00	-33.79	Pass	Horizontal
6396.125	36.11	7.34	44.54	45.52	44.43	74.00	-29.57	Pass	Horizontal
7386.000	36.44	6.78	44.92	44.86	43.16	74.00	-30.84	Pass	Horizontal
9848.000	38.14	7.19	45.53	43.21	43.01	74.00	-30.99	Pass	Horizontal
1251.079	30.35	1.94	44.31	47.16	35.14	74.00	-38.86	Pass	Vertical
1875.258	31.51	2.72	43.61	46.83	37.45	74.00	-36.55	Pass	Vertical
4924.000	34.94	6.22	44.60	42.80	39.36	74.00	-34.64	Pass	Vertical
6594.518	36.21	7.29	44.56	45.16	44.10	74.00	-29.90	Pass	Vertical
7386.000	36.44	6.78	44.92	44.36	42.66	74.00	-31.34	Pass	Vertical
9848.000	38.14	7.19	45.53	42.65	42.45	74.00	-31.55	Pass	Vertical

Note:

- 1) Through Pre-scan transmitting mode with all kind of modulation and data rate, found the 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20), and then Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 Final Test Level =Receiver Reading - Correct Factor
 Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

PHOTOGRAPHS OF TEST SETUP


Test Model No.: ESP-01M



Radiated spurious emission Test Setup-1(30MHz-1GHz)




Radiated spurious emission Test Setup-2(Above 1GHz)

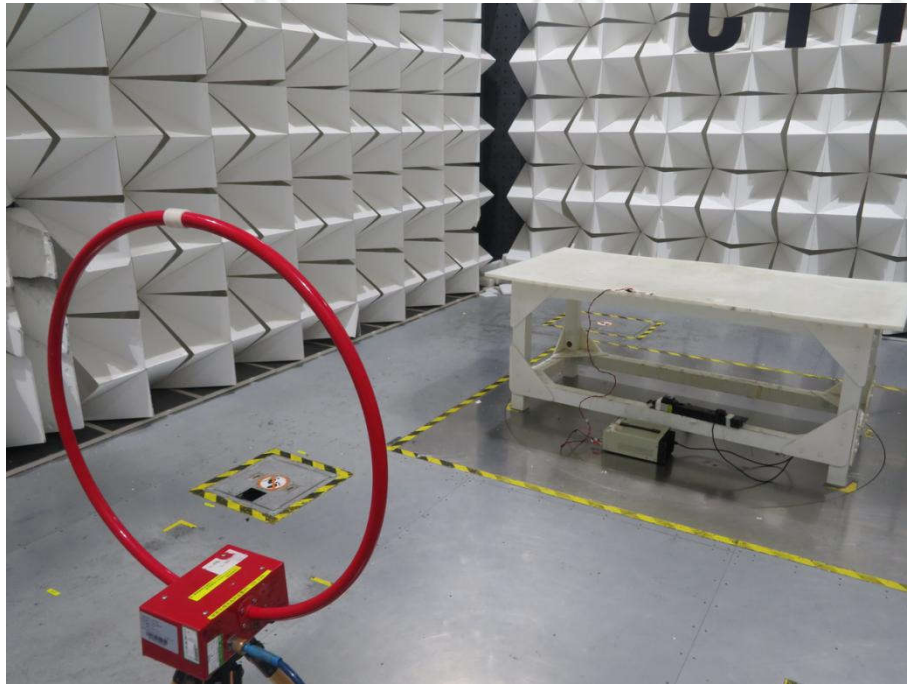

Radiated spurious emission Test Setup-2(Below 30MHz)




Radiated spurious emission Test Setup for close-up

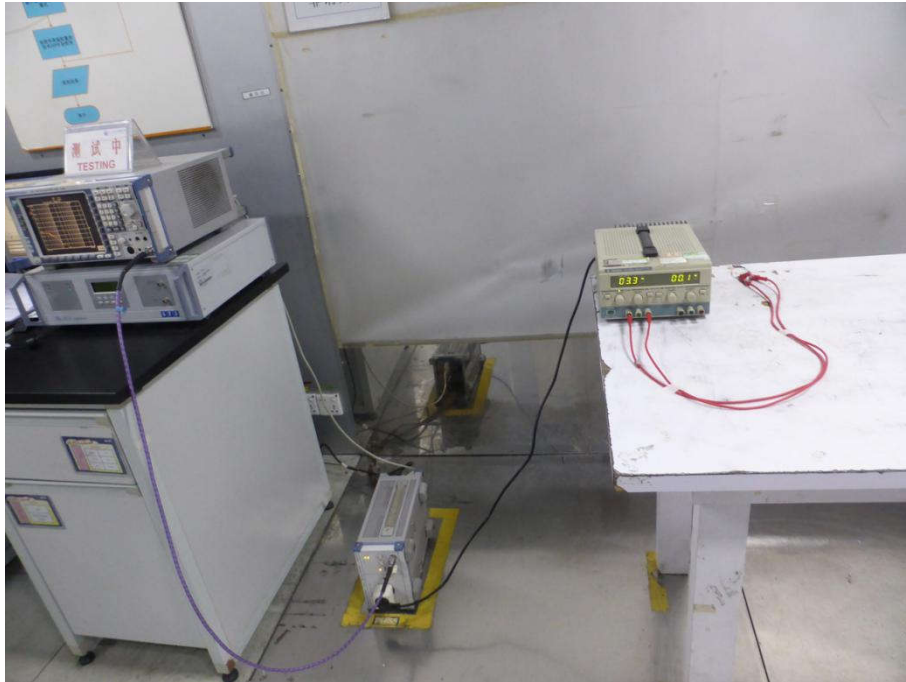


Conducted Emissions Test Setup

PHOTOGRAPHS OF EUT Constructional Details


Test model No.: ESP-01M

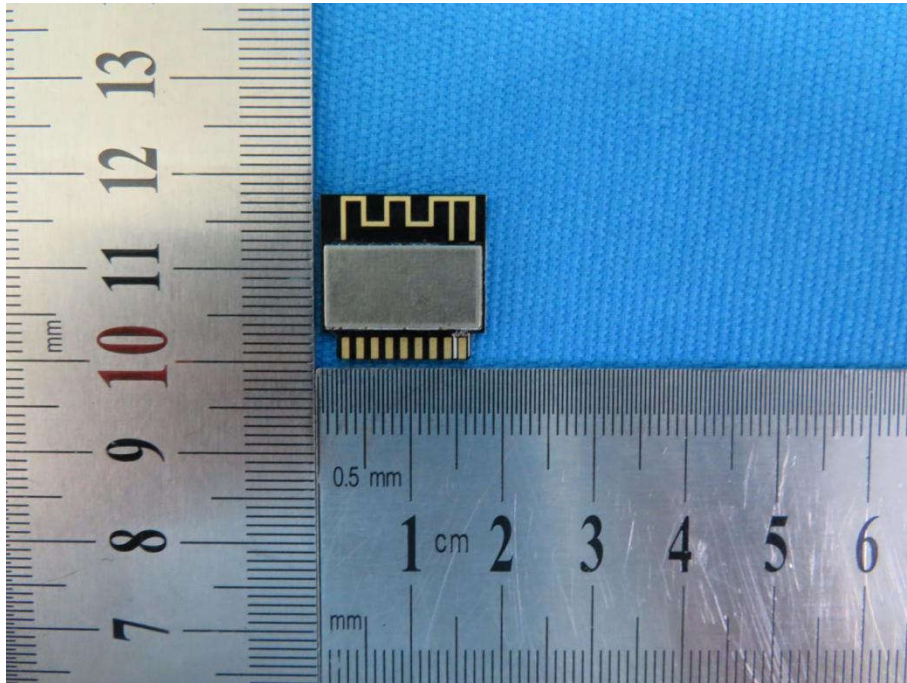


View of Product-1

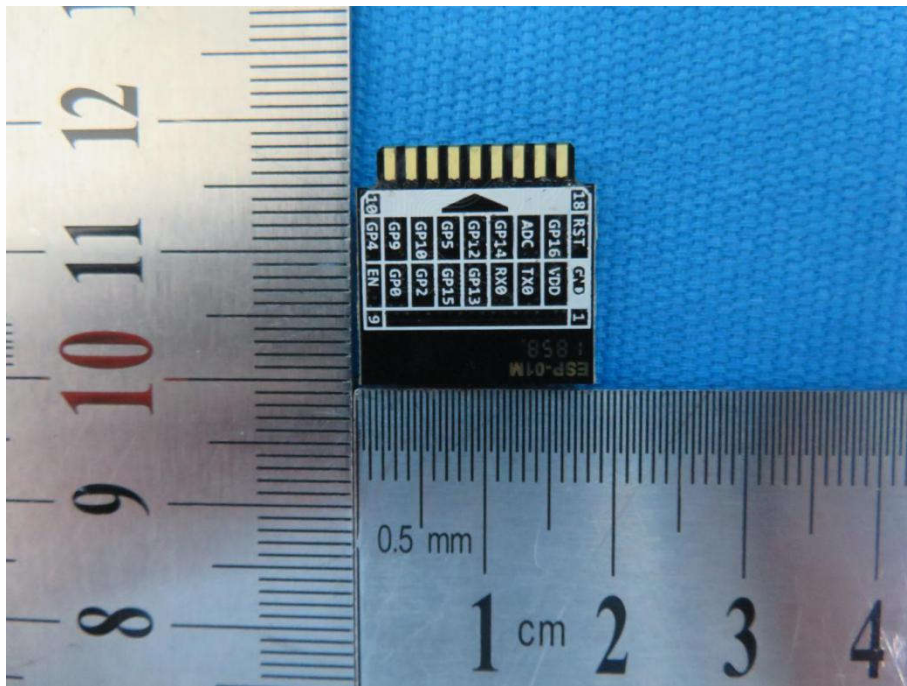


View of Product-2

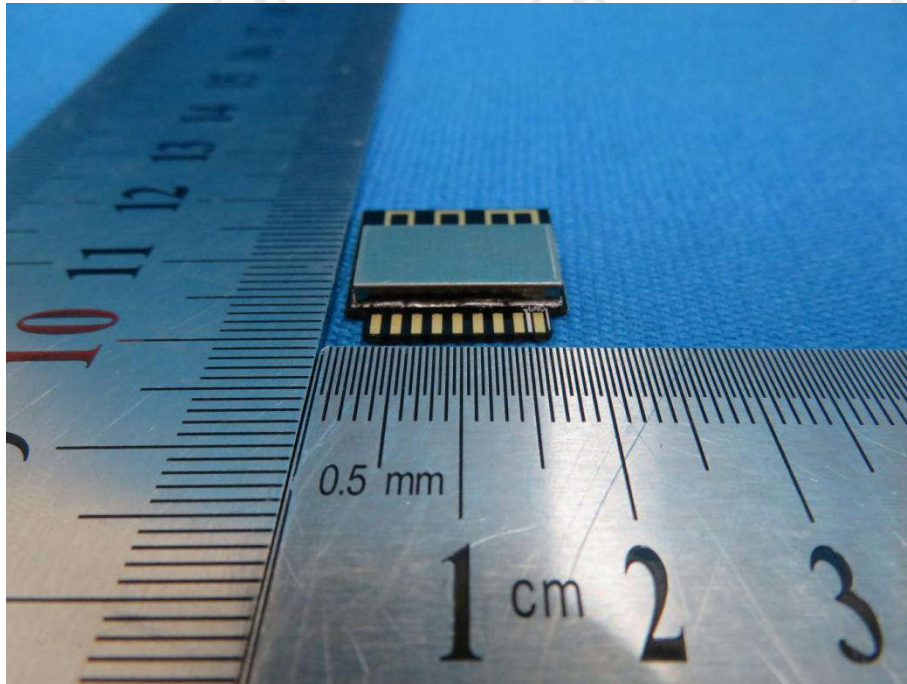


View of Product-3

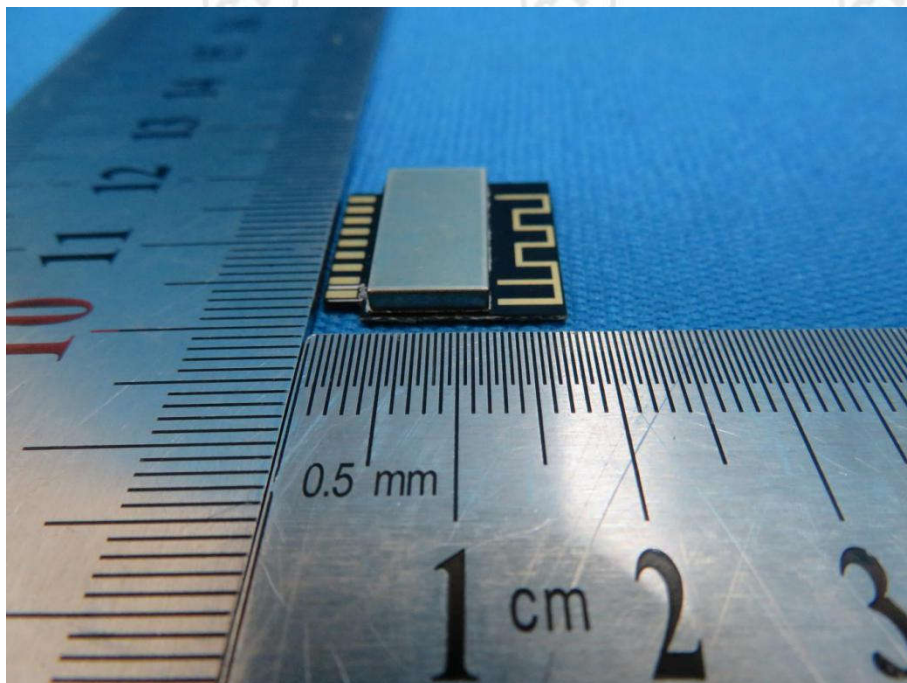


View of Product-4

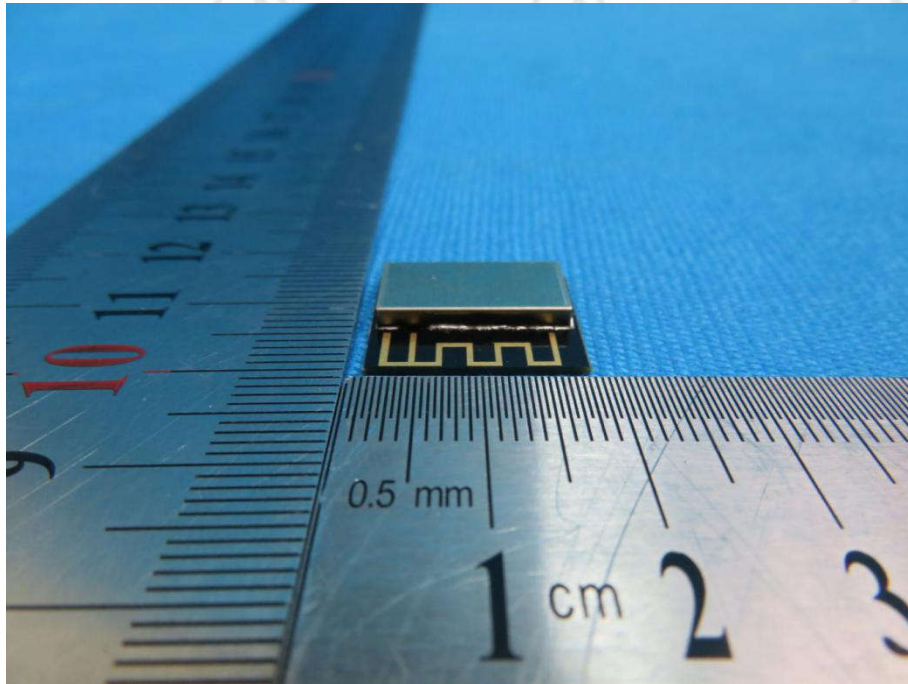


View of Product-5

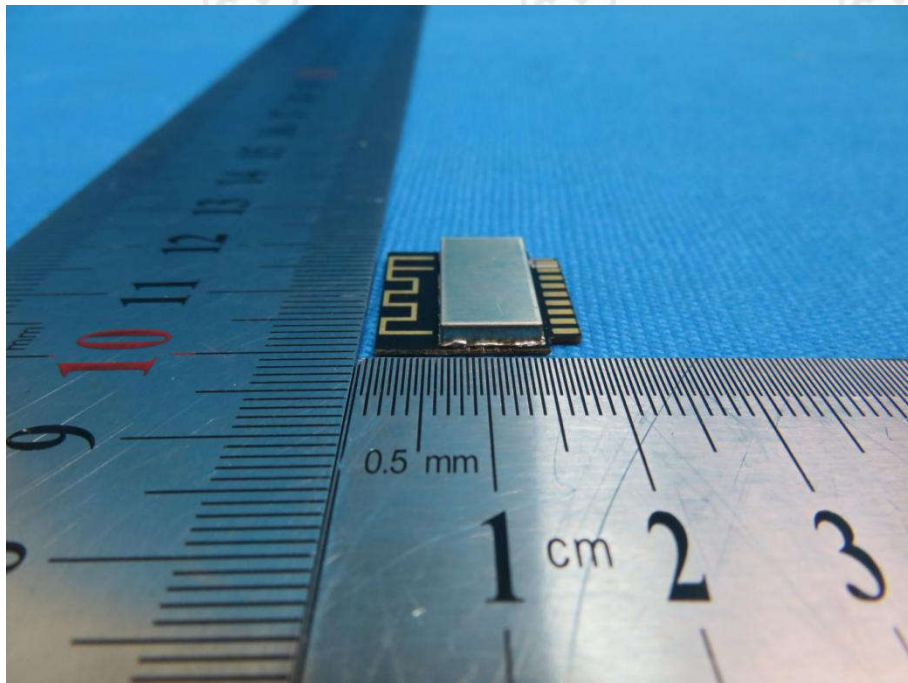

View of Product-6

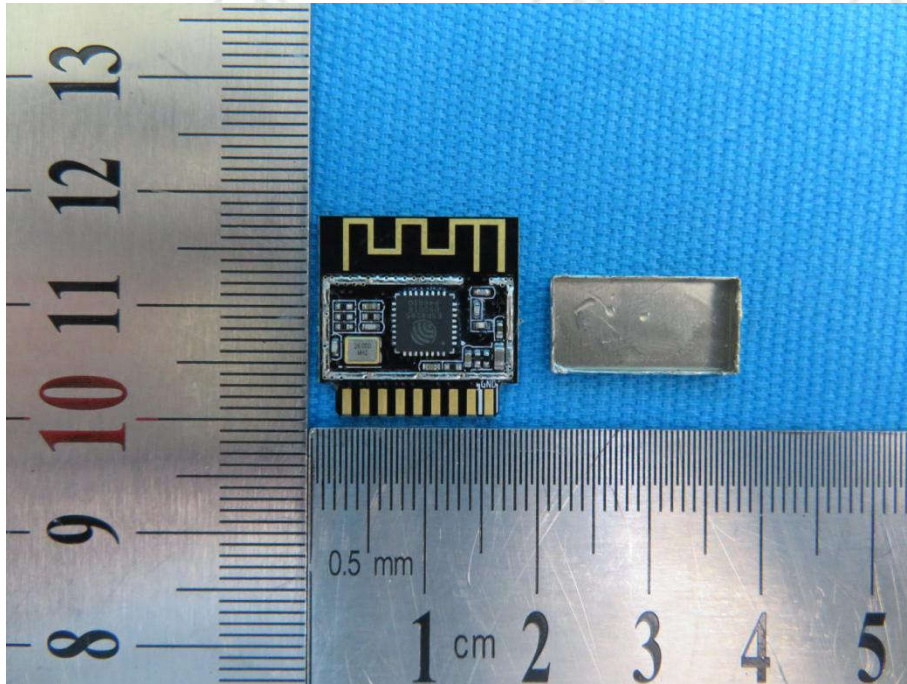

View of Product-7

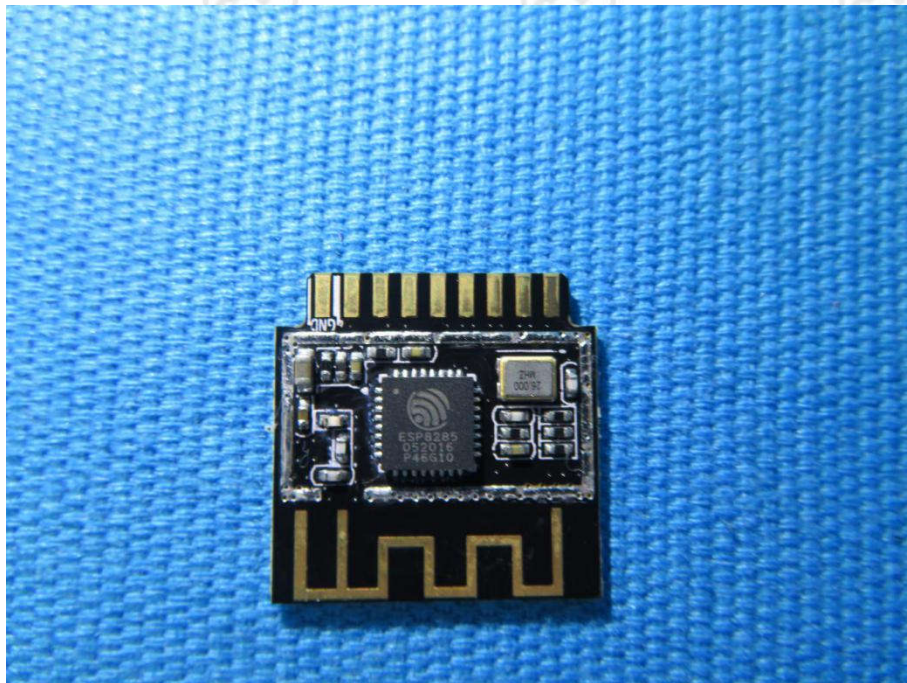

View of Product-8

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.