# SGS

# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

 Telephone:
 +86 (0) 755 2601 2053

 Fax:
 +86 (0) 755 2671 0594

 Email:
 ee.shenzhen@sgs.com

Report No.: SZEM160300123401 Page: 1 of 95

#### **FCC REPORT**

Application No:	SZEM1603001234CR
Applicant:	Shenzhen Ai-Thinker Technology Co., Ltd
Manufacturer:	Shenzhen Ai-Thinker Technology Co., Ltd
Factory:	Shenzhen Ai-Thinker Technology Co., Ltd
Product Name:	WIFI Module
Model No.(EUT):	ESO-12S
FCC ID:	2AHMR-ESP12S
Standards:	47 CFR Part 15, Subpart C (2015)
Date of Receipt:	2016-03-09
Date of Test:	2016-06-24 to 2016-07-01
Date of Issue:	2016-07-08
Test Result:	PASS *

.\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM160300123401 Page: 2 of 95

#### 2 Version

Revision Record							
Version	VersionChapterDateModifierRemark						
00		2016-07-08		Original			

Authorized for issue by:		
Tested By	feter Gene	2016-07-01
	(Peter Geng) /Project Engineer	Date
Prepared By	Joyce Shi	2016-06-02
	(Joyce Shi) /Clerk	Date
Checked By	Eric Fu	2016-06-02
	(Eric Fu) /Reviewer	Date

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160300123401 Page: 3 of 95

#### 3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2013	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	ound fundamental quency (Radiated47 CFR Part 15, Subpart C Section15.205/15.209		PASS



Report No.: SZEM160300123401 Page: 4 of 95

#### 4 Contents

			Page
1	CO/	/ER PAGE	1
2	VEP	SION	2
3	TES	T SUMMARY	
4		ITENTS	4
4			
5	GEN		
	5.1	CLIENT INFORMATION	
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST ENVIRONMENT AND MODE	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5		
	5.6		
	5.7 5.8	DEVIATION FROM STANDARDS	
	5.6 5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	5.9 5.10	EQUIPMENT LIST	
6		T RESULTS AND MEASUREMENT DATA	
0	-		
	6.1		
	6.2		
	6.3	CONDUCTED PEAK OUTPUT POWER	
	6.4 6.5	6DB OCCUPY BANDWIDTH Power Spectral Density	
	6.6	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	6.7	RF Conducted Spurious Emissions	
	6.8	RADIATED SPURIOUS EMISSIONS	
	6.8.		
	6.8.2		
	6.9	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	
7	PHC	TOGRAPHS - EUT TEST SETUP	
	7.1	CONDUCTED EMISSION	
	7.2	RADIATED EMISSION	
	7.3	RADIATED SPURIOUS EMISSION	
8	PHC	TOGRAPHS - EUT CONSTRUCTIONAL DETAILS	



Report No.: SZEM160300123401 Page: 5 of 95

#### 5 General Information

#### 5.1 Client Information

Applicant:	Shenzhen Ai-Thinker Technology Co., Ltd						
Address of Applicant:	6/F,Block C2,Huafeng Industrial Park, Hangcheng Road,Baoar district ,Shenzhen ,China						
Manufacturer:	Shenzhen Ai-Thinker Technology Co., Ltd						
Address of Manufacturer:	6/F,Block C2,Huafeng Industrial Park, Hangcheng Road,Baoan district ,Shenzhen ,China						
Factory:	Shenzhen Ai-Thinker Technology Co., Ltd						
Address of Factory:	6/F,Block C2,Huafeng Industrial Park, Hangcheng Road,Baoan district ,Shenzhen ,China						

#### 5.2 General Description of EUT

Product Name:	WIFI Module
Model No.:	ESO-12S
Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK)
	IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK)
	IEEE for 802.11n(HT20) : OFDM (64QAM, 16QAM,QPSK,BPSK)
Antenna Type:	omni antenna
Antenna Gain:	3dBi
AC adapter	DC 5V from USB port
Battery	DC 5V from USB port

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160300123401 Page: 6 of 95

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel Frequency Channel Frequency Channel Frequency Channel Frequency							Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160300123401 Page: 7 of 95

#### 5.3 Test Environment and Mode

Operating Environment:				
Temperature:	25.0 °C			
Humidity:	55 % RH			
Atmospheric Pressure: 1015 mbar				
Test mode:				
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all			
	kind of data rate.			

#### 5.4 Description of Support Units

The EUT has been tested with following associated Units.

Description	Manufacture	S/N
	Manufacture	serial number
Laptop	Lenovo	T430u

#### 5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM160300123401 Page: 8 of 95

#### 5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

#### • VCCI

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

#### FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### Industry Canada (IC)

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

#### 5.7 Deviation from Standards

None.

#### 5.8 Abnormalities from Standard Conditions

None.

#### 5.9 Other Information Requested by the Customer

None.



Report No.: SZEM160300123401 Page: 9 of 95

#### 5.10Equipment List

	Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)	
1	Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2016-05-13	2017-05-13	
2	LISN	Rohde & Schwarz	ENV216	SEM007-01	2015-10-09	2016-10-09	
3	LISN	ETS- LINDGREN	3816/2	SEM007-02	2016-04-25	2017-04-25	
4	8 Line ISN	Fischer Custom Communication s Inc.	FCC- TLISN-T8- 02	EMC0120	2015-08-30	2016-08-30	
5	4 Line ISN	Fischer Custom Communication s Inc.	FCC- TLISN-T4- 02	EMC0121	2015-08-30	2016-08-30	
6	2 Line ISN	Fischer Custom Communication s Inc.	FCC- TLISN-T2- 02	EMC0122	2015-08-30	2016-08-30	
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2016-04-25	2017-04-25	
8	DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2015-10-09	2016-10-09	

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160300123401 Page: 10 of 95

	RE in Chamber							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)		
1	10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2015-08-01	2016-08-01		
2	EMI Test Receiver (9k-3GHz)	Rohde & Schwarz	ESCI	SEM004-01	2016-04-25	2017-04-25		
3	Trilog-Broadband Antenna(30M-1GHz)	Schwarzbeck	VULB9168	SEM003-17	2016-01-26	2017-01-26		
4	Pre-amplifier	Sonoma Instrument Co	310N	SEM005-03	2016-04-25	2017-04-25		
5	Loop Antenna	ETS-Lindgren	6502	SEM003-08	2015-08-14	2016-08-14		

	RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)	
1	3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2016-05-13	2017-05-13	
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEM004-04	2016-04-25	2017-04-25	
3	BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-02	2014-11-15	2017-11-15	
4	Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2015-10-09	2016-10-09	
5	Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-14	
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2014-11-24	2017-11-24	
7	Low Noise Amplifier	Black Diamond Series	BDLNA- 0118- 352810	SEM005-05	2015-10-09	2016-10-09	
8	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A	



Report No.: SZEM160300123401 Page: 11 of 95

	RF connected test								
Item	Test Equipment	ipment Manufacturer Model No	Model No.	Inventory No.	Cal. date	Cal.Due date			
					(yyyy-mm-dd)	(yyyy-mm-dd)			
1	DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2015-10-09	2016-10-09			
2	Spectrum Analyzer	Rohde &	FSP SEM004-0		2015-10-17	2016-10-17			
2	Spectrum Analyzer	Schwarz		3210004-00					
3	Signal Constator	Rohde & OMLOG	CMI 02	SEM006-02	2016 04 25	2017 04 25			
3	Signal Generator	Schwarz	SML03		2016-04-25	2017-04-25			
	Dower Motor	Rohde &	& ND\(0			2015 10 00	2016 10 00		
4	Power Meter	Schwarz	NRVS	SEM014-02	2015-10-09	2016-10-09			



Report No.: SZEM160300123401 Page: 12 of 95

#### 6 Test results and Measurement Data

#### 6.1 Antenna Requirement

**Standard requirement:** 47 CFR Part 15C Section 15.203 /247(c)


#### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



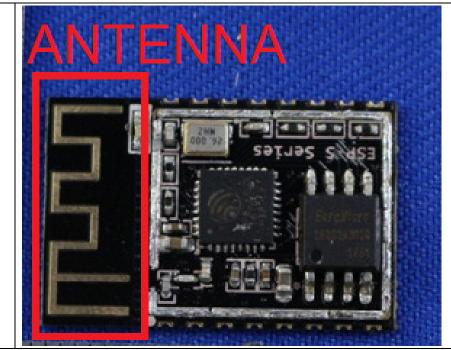

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 3dBi.



Report No.: SZEM160300123401 Page: 13 of 95

Т	est Requirement:	47 CFR Part 15C Section 15.207					
Т	est Method:	ANSI C63.10: 2013					
Т	est Frequency Range:	15	150kHz to 30MHz				
L	.imit:			Limit (dBuV)			
			Frequency range (MHz)	Quasi-peak	Average		
			0.15-0.5	66 to 56*	56 to 46*		
			0.5-5	56	46		
			5-30	60	50		
		* [	Decreases with the logarithn	n of the frequency.			
	est Procedure:	2) 3) 4)	The mains terminal disturb room. The EUT was connected to Impedance Stabilization linear impedance. The power call connected to a second reference plane in the same way as to multiple socket outlet strip a single LISN provided the ra The tabletop EUT was place ground reference plane. Was placed on the horizontal gr The test was performed wi of the EUT shall be 0.4 m vertical ground reference p reference plane. The LISN unit under test and bonded mounted on top of the grou between the closest points the EUT and associated ed In order to find the maximu equipment and all of the in ANSI C63.10: 2013 on cor	AC power source thro Network) which provi oles of all other units of LISN 2, which was the LISN 1 for the unit was used to connect ating of the LISN was r ced upon a non-metalli And for floor-standing round reference plane, th a vertical ground ref from the vertical ground plane was bonded to the 1 was placed 0.8 m fr to a ground reference und reference plane. T of the LISN 1 and the quipment was at least ( um emission, the relativi-	bugh a LISN 1 (Line des a 50Ω/50µH + f the EUT were bonded to the grou being measured. A multiple power cables not exceeded. c table 0.8m above the arrangement, the E ference plane. The re- id reference plane. The e horizontal ground om the boundary of the plane for LISNs his distance was EUT. All other units of 0.8 m from the LISN 2 we positions of	5Ω und s to ne EUT ar ne he bf 2.	

#### 6.2 Conducted Emissions



Report No.: SZEM160300123401 Page: 14 of 95

Test Setup:	Shielding Room Test Receiver Test				
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.				
	Transmitting mode.				
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate of 802.11b at lowest channel is the worst case.				
	Transmitting mode.				
	Only the worst case is recorded in the report.				
Instruments Used:	Refer to section 5.10 for details				
Test Results:	Pass				




Report No.: SZEM160300123401 Page: 15 of 95

#### **Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


Live Line:

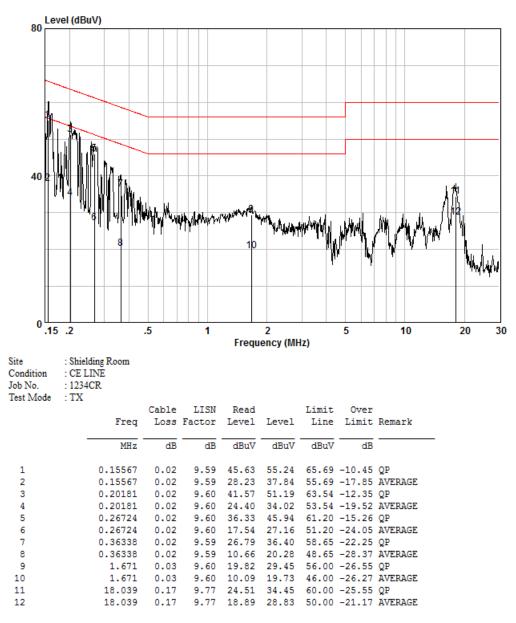



Report No.: SZEM160300123401 Page: 16 of 95

Neutral Line:

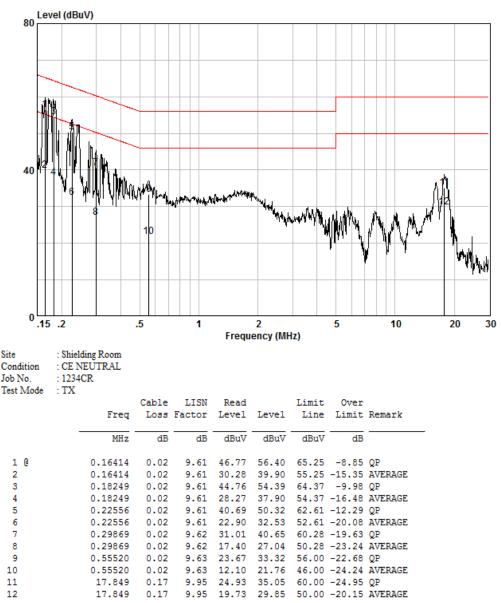

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:

2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM160300123401 Page: 17 of 95

#### 6.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)			
Test Method:	ANSI C63.10 :2013 Section 11.9.1			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark:			
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.			
Test Instruments:	Refer to section 5.10 for details			
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates			
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;			
	6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20).			
Limit:	30dBm			
Test Results:	Pass			



Report No.: SZEM160300123401 Page: 18 of 95

Pre-scan under all rate at lowest channel 1								
Mode		802	.11b					
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps				
Power (dBm)	5.88	5.86	5.84	5.81				
Mode				80	2.11g			
Data Rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
Power (dBm)	10.18	10.16	10.12	10.11	10.08	10.07	10.01	9.99
Mode				802.11	n(HT20)			
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps
Power (dBm)	11.55	11.51	11.47	11.46	11.43	11.38	11.33	11.32
Mode				802.11	n(HT40)			
Data Rate	13.5Mbps	27Mbps	40.5Mbps	54Mbps	81Mbps	108Mbps	121.5Mbps	135Mbps
Power (dBm)								
Through Pre-scan, 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20);								

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM160300123401 Page: 19 of 95

	802.11b mode						
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result				
Lowest	5.88	30.00	Pass				
Middle	5.57	30.00	Pass				
Highest	4.98	30.00	Pass				
	802.11g mo	de					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result				
Lowest	10.18	30.00	Pass				
Middle	9.89	30.00	Pass				
Highest	10.20	30.00	Pass				
	802.11n(HT20)	mode					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result				
Lowest	11.55	30.00	Pass				
Middle	11.04	30.00	Pass				
Highest	10.37	30.00	Pass				

#### **Measurement Data**





Report No.: SZEM160300123401 Page: 20 of 95

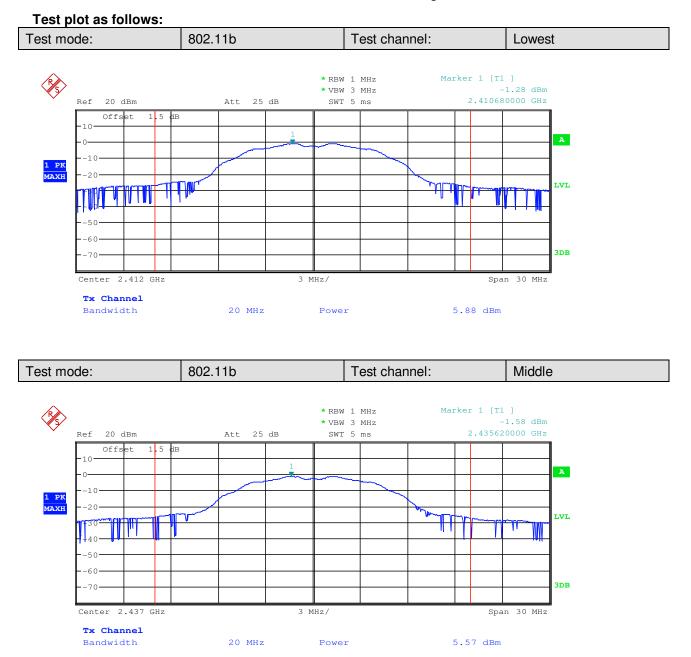




Report No.: SZEM160300123401 Page: 21 of 95

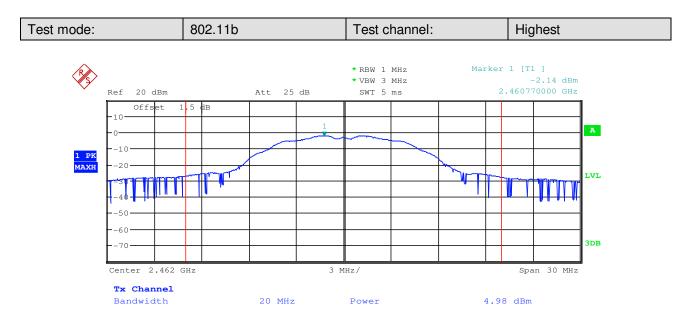

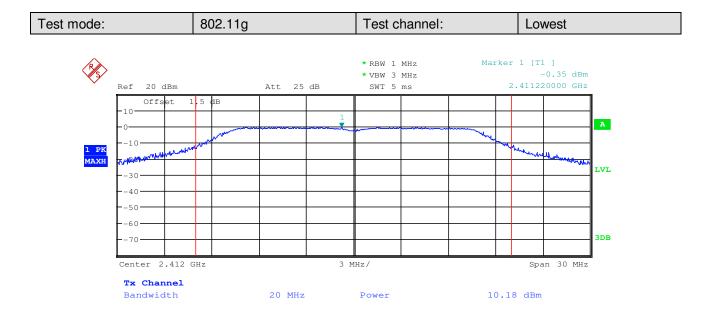





Report No.: SZEM160300123401 Page: 22 of 95

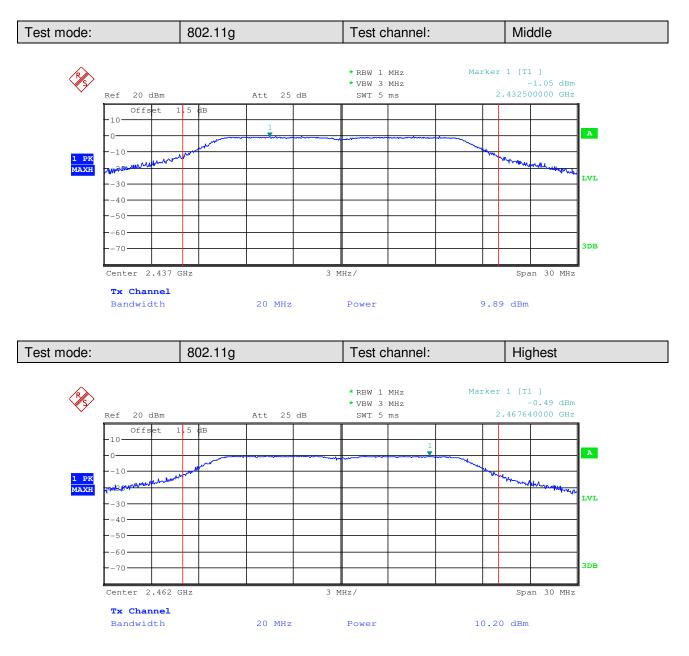




Report No.: SZEM160300123401 Page: 23 of 95

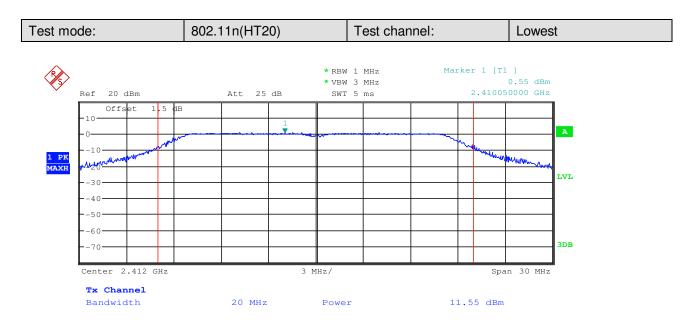

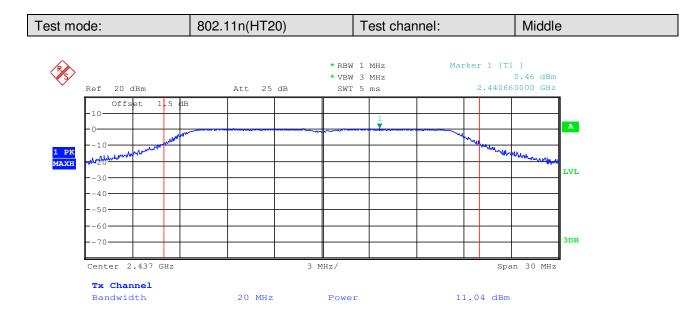



Report No.: SZEM160300123401 Page: 24 of 95

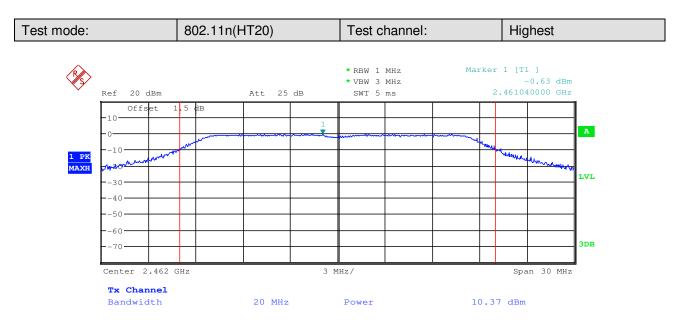



Report No.: SZEM160300123401 Page: 25 of 95

#### 6.4 6dB Occupy Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)		
Test Method:	ANSI C63.10: 2013 Section 11.8		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
Instruments Used:	Refer to section 5.10 for details		
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates		
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;		
	6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20).		
Limit:	≥ 500 kHz		
Test Results:	Pass		

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM160300123401 Page: 26 of 95

	802.11b mode						
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result				
Lowest	8.58	≥500	Pass				
Middle	8.61	≥500	Pass				
Highest	8.10	≥500	Pass				
	802.11g mode						
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result				
Lowest	16.41	≥500	Pass				
Middle	16.41	≥500	Pass				
Highest	16.41	≥500	Pass				
	802.11n(HT20) mode						
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result				
Lowest	17.67	≥500	Pass				
Middle	17.64	≥500	Pass				
Highest	17.67	≥500	Pass				

#### Measurement Data





Report No.: SZEM160300123401 Page: 27 of 95

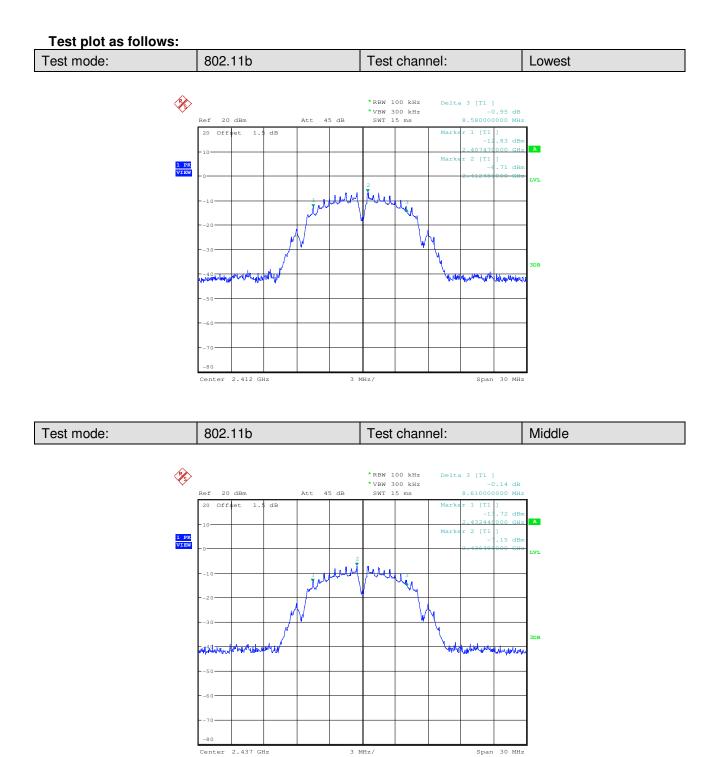




Report No.: SZEM160300123401 Page: 28 of 95

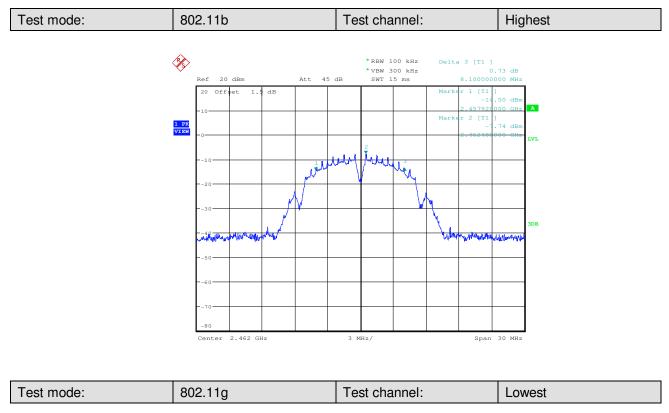


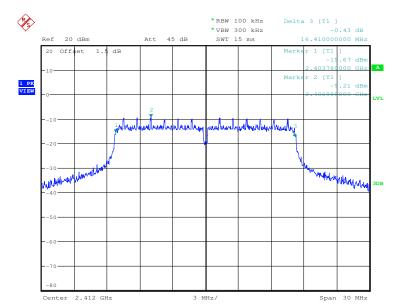




Report No.: SZEM160300123401

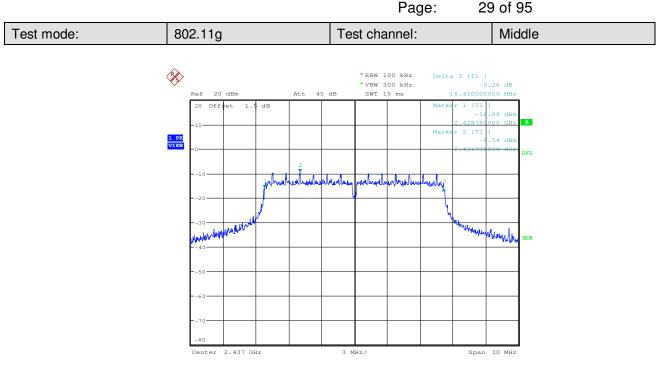


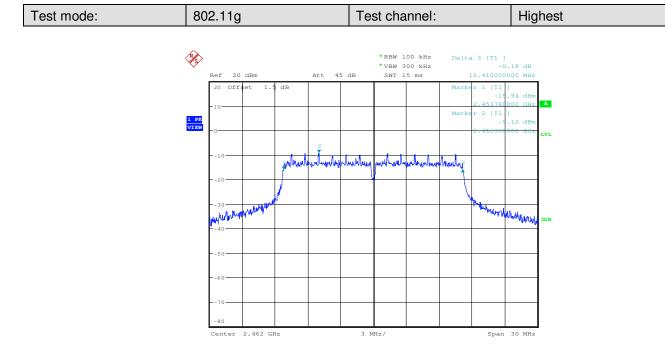




Report No.: SZEM160300123401

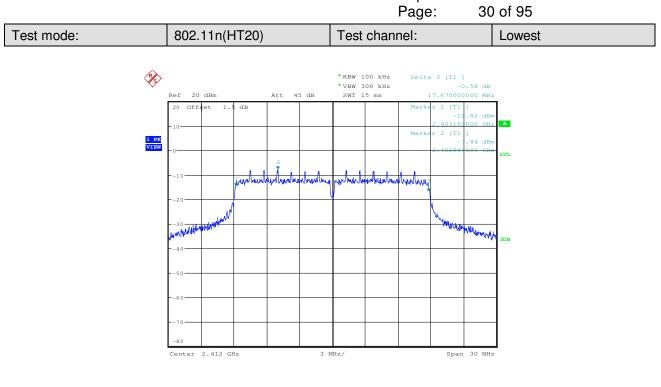

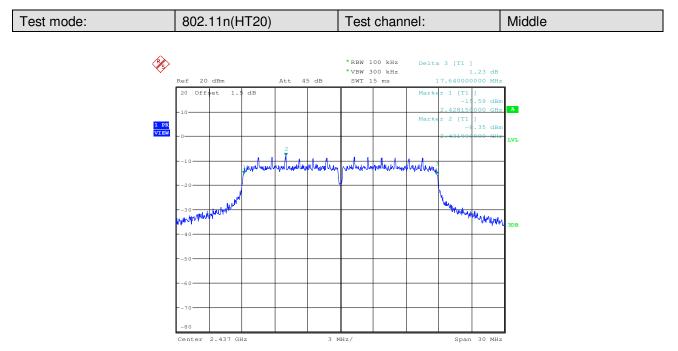



Report No.: SZEM160300123401

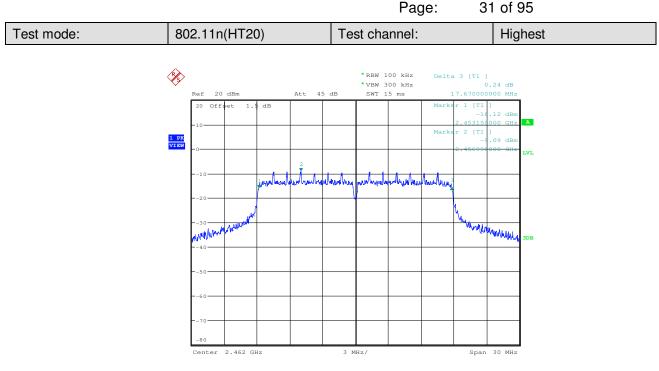



Report No.: SZEM160300123401 Page: 32 of 95

#### 47 CFR Part 15C Section 15.247 (e) **Test Requirement:** Test Method: ANSI C63.10 :2013 Section 11.10.2 Test Setup: Spectrum Analyzer E.U.T G Non-Conducted Table **Ground Reference Plane** Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer. **Test Instruments:** Refer to section 5.10 for details Exploratory Test Mode: Transmitting with all kind of modulations, data rates Final Test Mode: Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20). Limit: ≤8.00dBm/3kHz **Test Results:** Pass

#### 6.5 Power Spectral Density




Report No.: SZEM160300123401 Page: 33 of 95

	802.11b mode						
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result				
Lowest	-20.89	≤8.00	Pass				
Middle	-21.75	≤8.00	Pass				
Highest	-22.01	≤8.00	Pass				
	802.11g mode						
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result				
Lowest	-23.54	≤8.00	Pass				
Middle	-24.52	≤8.00	Pass				
Highest	-23.64	≤8.00	Pass				
	802.11n(HT20) mode						
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result				
Lowest	-22.98	≤8.00	Pass				
Middle	-23.46	≤8.00	Pass				
Highest	-23.59	≤8.00	Pass				

#### Measurement Data




Report No.: SZEM160300123401 Page: 34 of 95

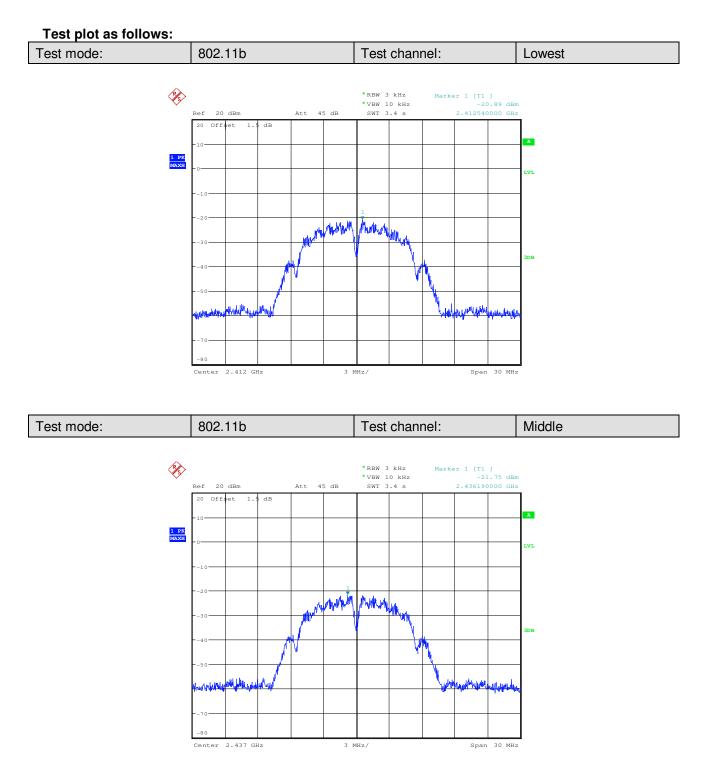



Report No.: SZEM160300123401 Page: 35 of 95

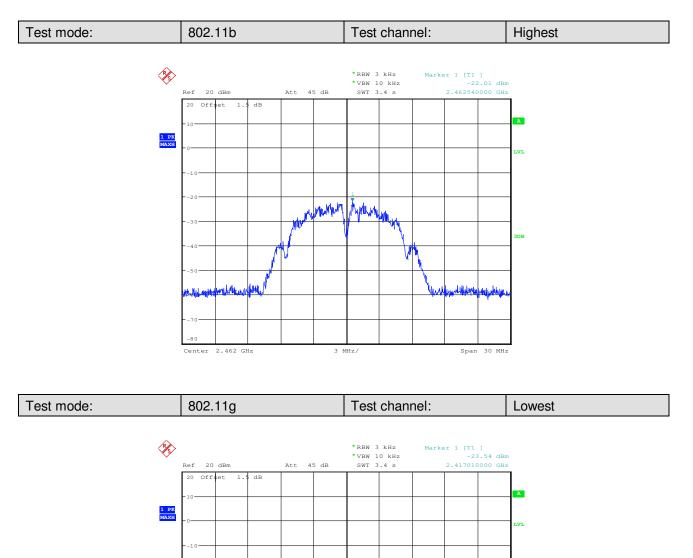

MANANANANANA MANANANANANANANANANANANA

3 MHz/

MANA

Center


2.412 GHz


Mulumpuna

Span 30 MHz




Report No.: SZEM160300123401 Page: 36 of 95

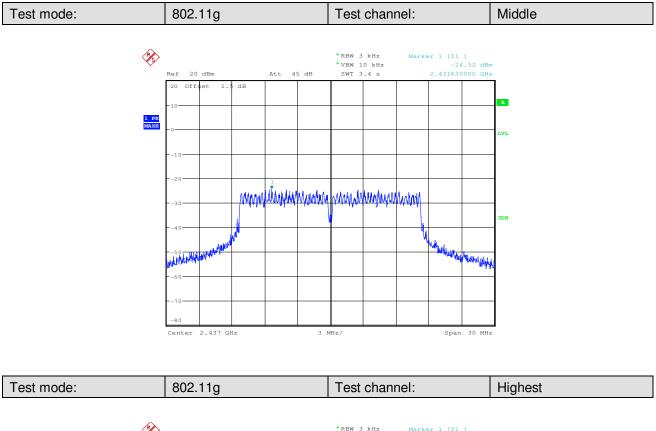


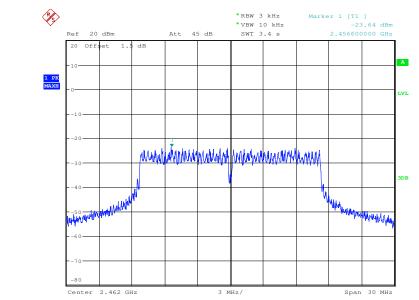




Report No.: SZEM160300123401

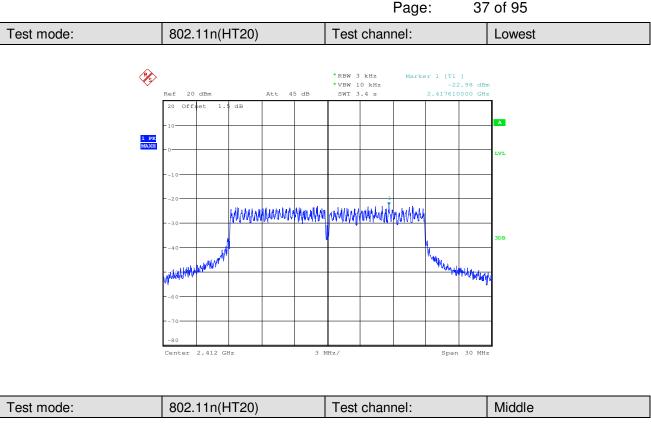

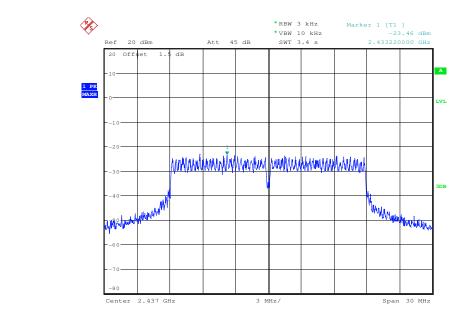



Report No.: SZEM160300123401

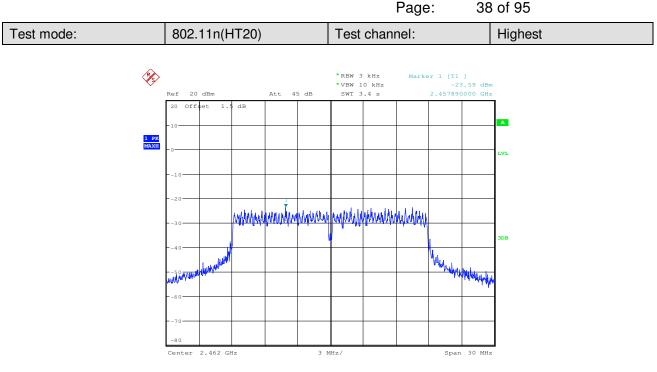



Report No.: SZEM160300123401 Page: 39 of 95


#### **Test Requirement:** 47 CFR Part 15C Section 15.247 (d) Test Method: ANSI C63.10: 2013 Section 11.13 Test Setup: Spectrum Analyzer E.U.T 6 Non-Conducted Table **Ground Reference Plane** Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer. Exploratory Test Mode: Transmitting with all kind of modulations, data rates Final Test Mode: Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20). Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Instruments Used: Refer to section 5.10 for details **Test Results:** Pass

#### 6.6 Band-edge for RF Conducted Emissions

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM160300123401 Page: 40 of 95

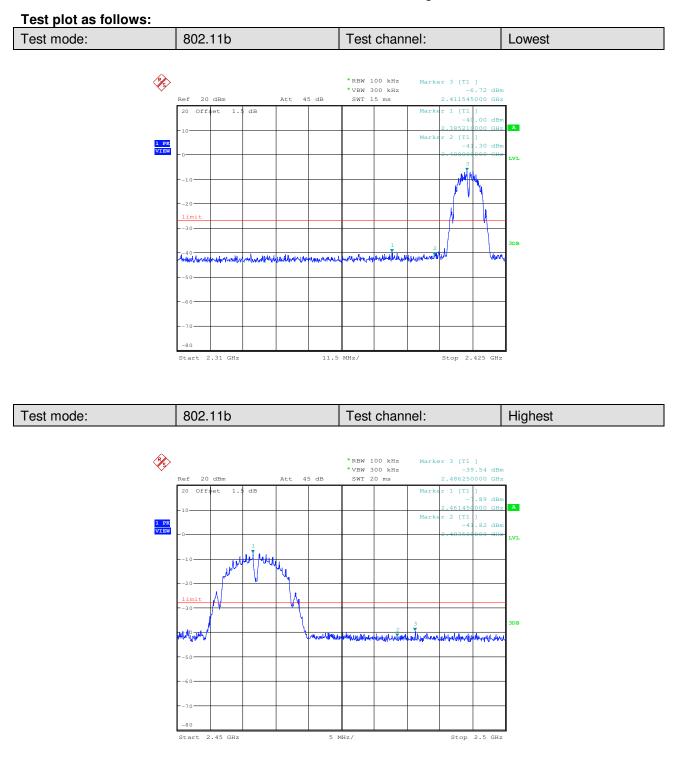




Report No.: SZEM160300123401 Page: 41 of 95

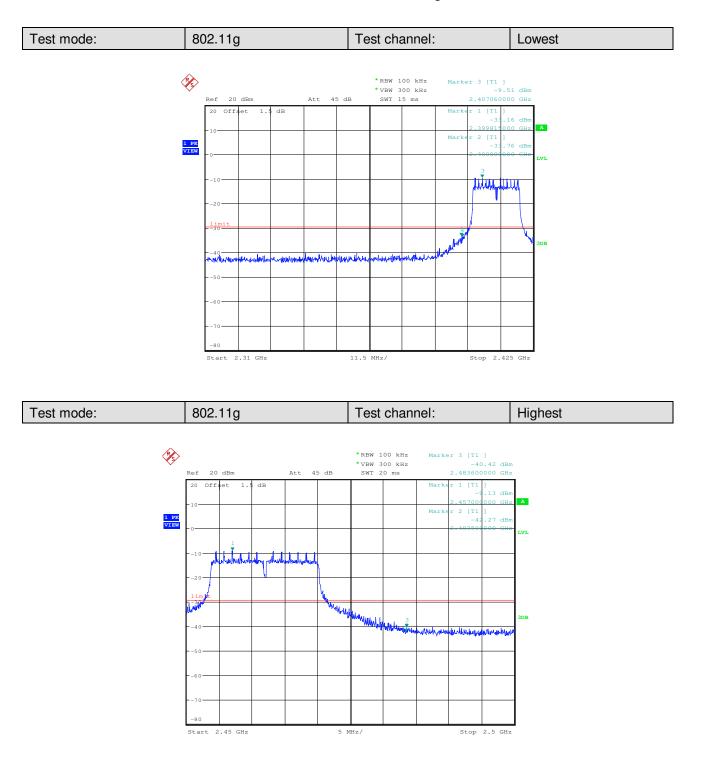




Report No.: SZEM160300123401 Page: 42 of 95

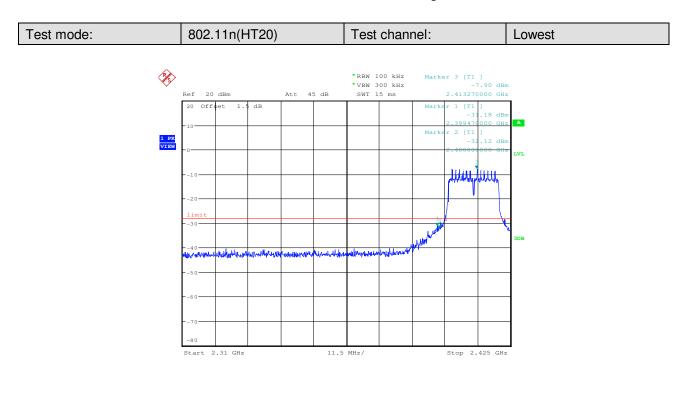

Test mode:802.11n(HT20)Test channel:Highest
---

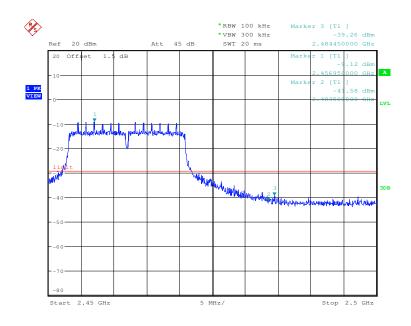



Report No.: SZEM160300123401 Page: 43 of 95


#### 6.7 RF Conducted Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013 Section 11.11
Test Setup:	Spectrum Analyzer F.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;
	6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20).
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM160300123401 Page: 44 of 95

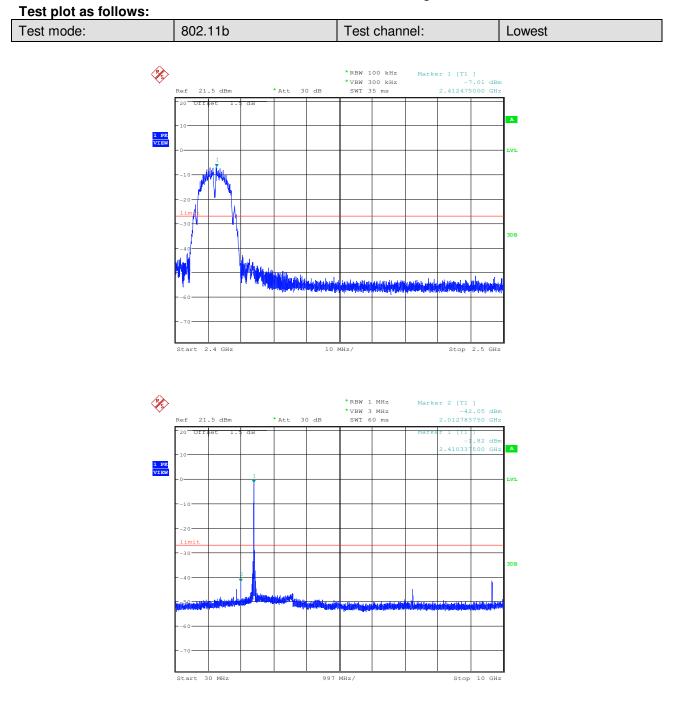




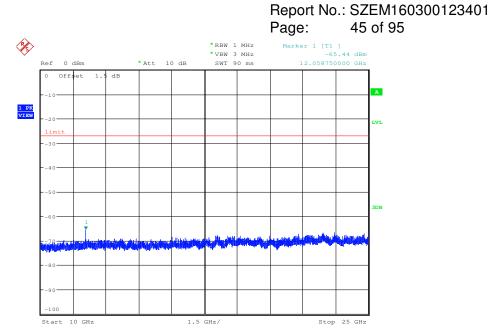

Test mode:	802.11b	Test channel:	Middle
------------	---------	---------------	--------

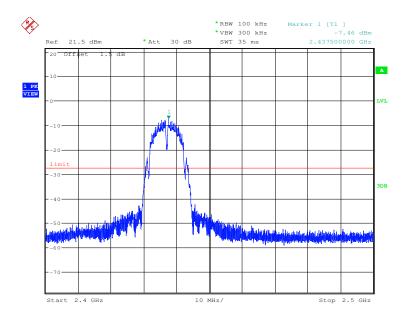




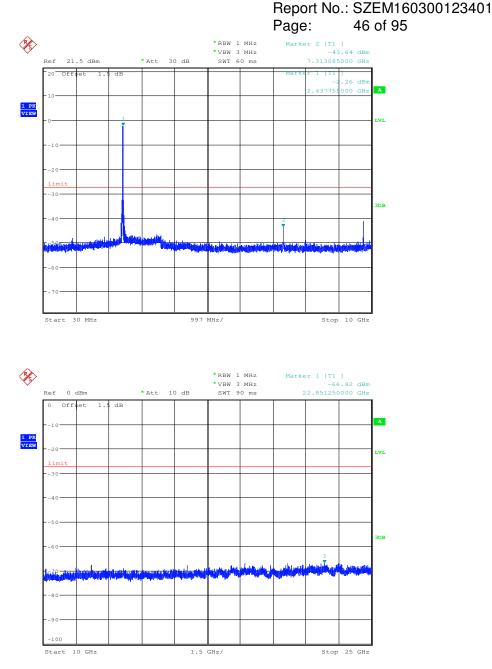





Report No.: SZEM160300123401 Page: 47 of 95

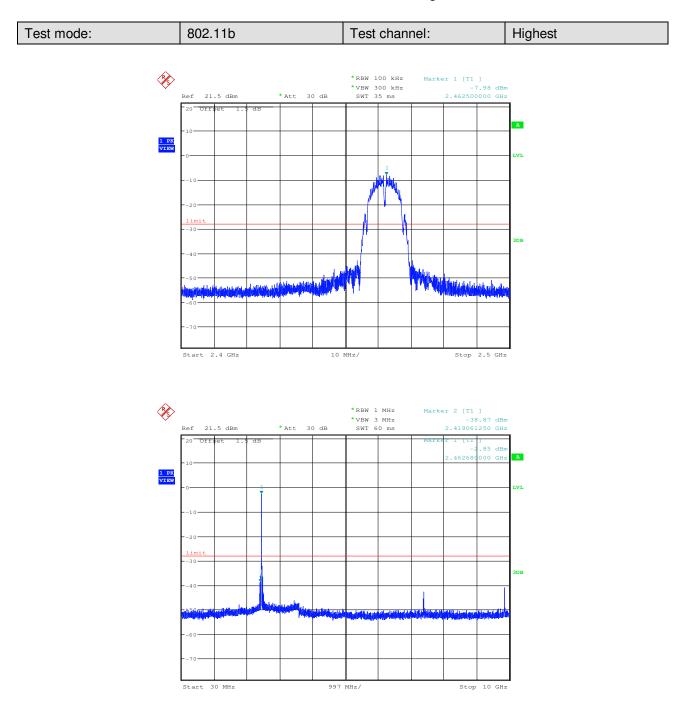




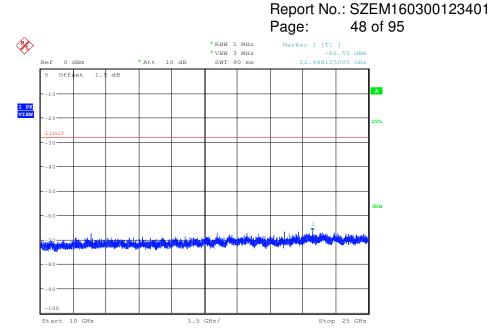

Test mode:	802.11g	Test channel:	Lowest

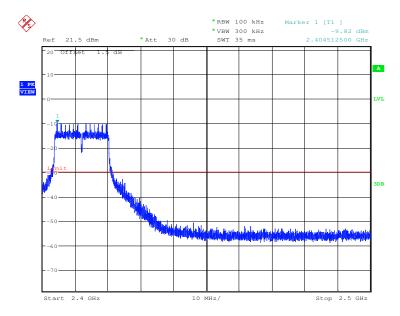




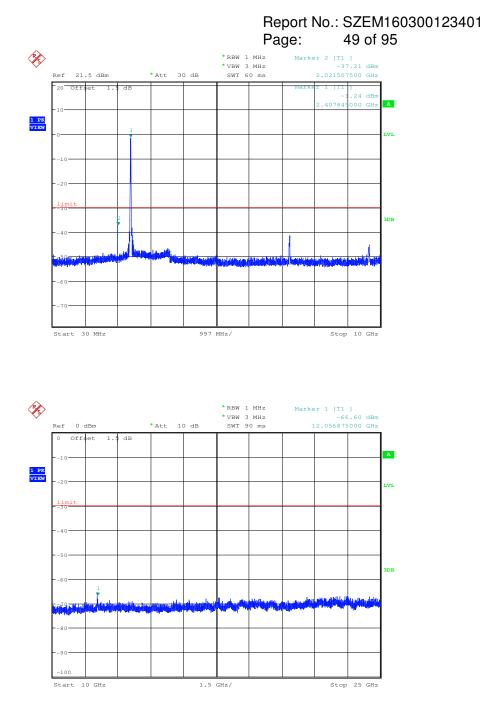





Report No.: SZEM160300123401 Page: 50 of 95

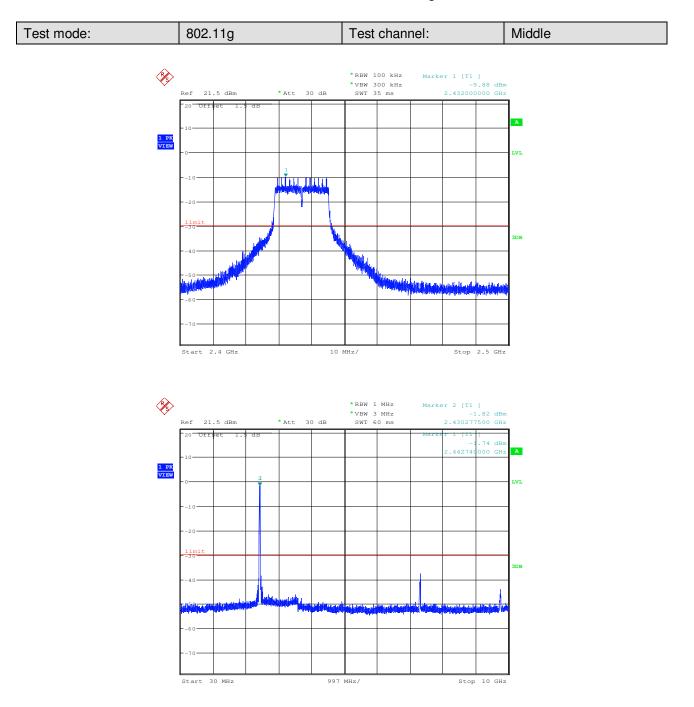




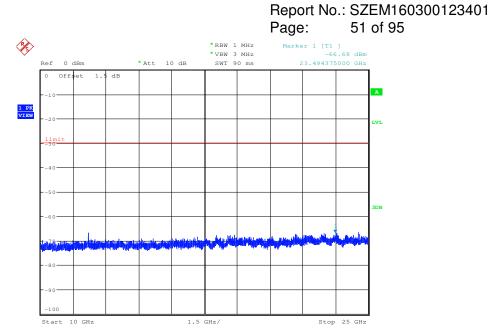

Test mode: 802.11g	Test channel:	Highest
--------------------	---------------	---------

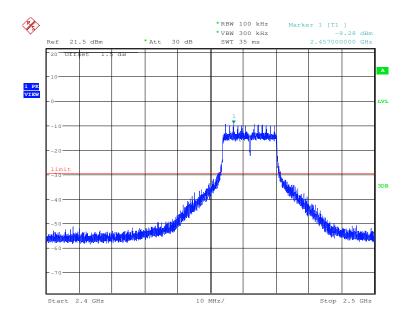




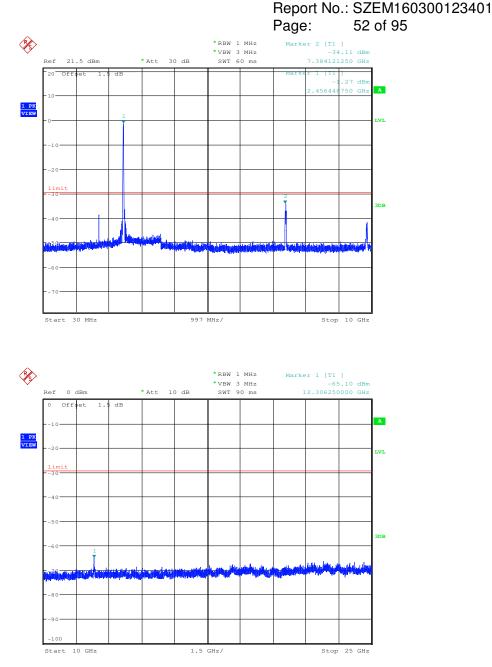




Report No.: SZEM160300123401 Page: 53 of 95

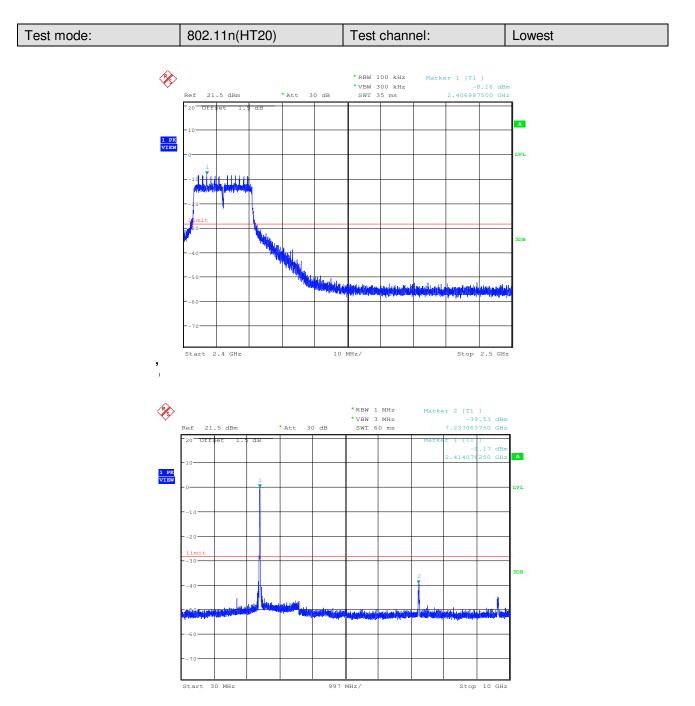




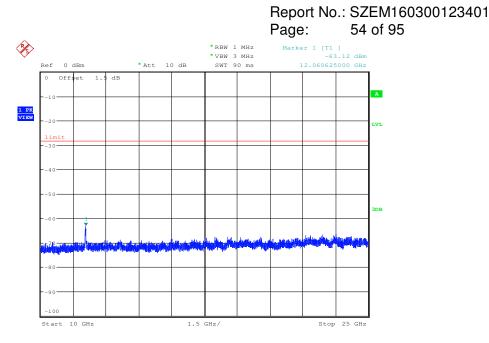


Test mode:	802.11n(HT20)	Test channel:	Middle
×.	Ref 21.5 dBm * Att 30 dB	*RBW 100 kHz Marker 1 [T1 ] *VBW 300 kHz -8.67 dBm SWT 35 ms 2.43200000 GHz	
<u>1 PK</u> VISW	-10		A LVL
	10		
	11mit -30 -40		3DB
	58		
	Start 2.4 GHz 10 1	MHz/ Stop 2.5 GHz	J



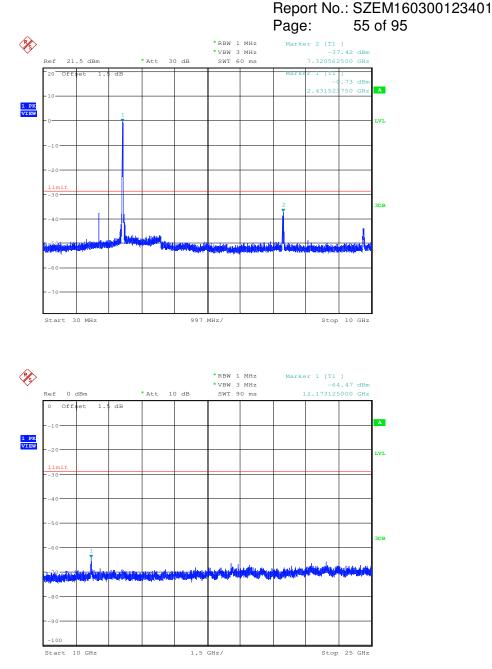




Report No.: SZEM160300123401 Page: 56 of 95

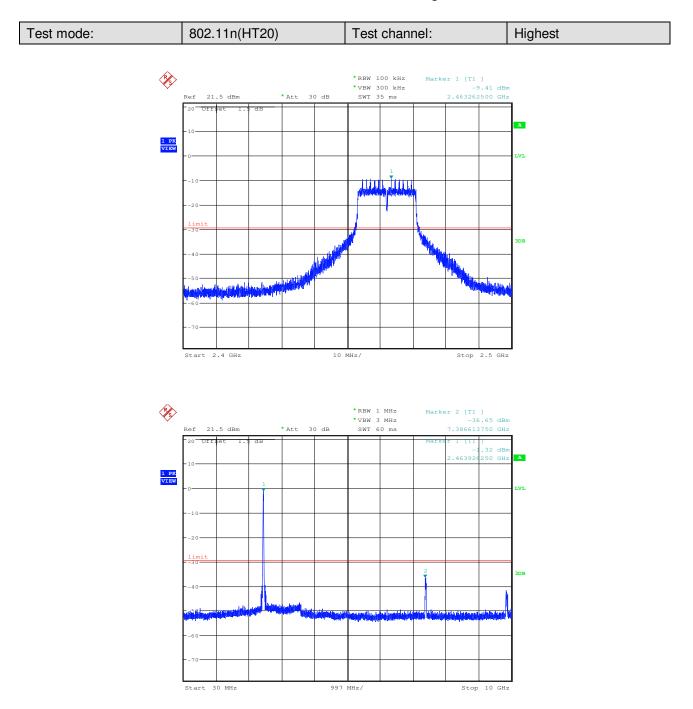



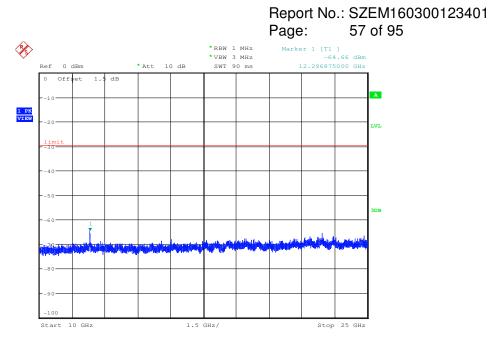

Remark:

Use 100kHz RBW to determine the relative limit in the band 2.4GHz to 2.5GHz, and Use 1MHz RBW to measure spurious emissions in the band 30MHz to 10GHz and 10GHz to 25GHz. The sweep points set to 30001.




Report No.: SZEM160300123401 Page: 58 of 95

#### 6.8 Radiated Spurious Emissions

Test Requirement:	7 CFR Part 15C Section 15.209 and 15.205						
Test Method:	ANSI C63.10 :2013 Sect	ion 11.12					
Test Site:	Measurement Distance:	3m (Semi-Anechoi	ic Chamber)				
	Measurement Distance:	10m (Semi-Aneche	oic Chamber	<i>.</i> )			
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark		
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak		
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average		
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak		
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak		
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average		
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak		
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak		
	Above 1GHz	Peak	1MHz	3MHz	Peak		
	Above IGH2	Peak	1MHz	10Hz	Average		
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)		
Limit:	Frequency 0.009MHz-0.490MHz			Remark -			
Limit:		(microvolt/meter)		Remark - -	distance (m)		
Limit:	0.009MHz-0.490MHz	(microvolt/meter) 2400/F(kHz)		Remark - -	distance (m) 300		
Limit:	0.009MHz-0.490MHz 0.490MHz-1.705MHz	(microvolt/meter) 2400/F(kHz) 24000/F(kHz)		Remark - - - Quasi-peak	distance (m) 300 30		
Limit:	0.009MHz-0.490MHz 0.490MHz-1.705MHz 1.705MHz-30MHz	(microvolt/meter) 2400/F(kHz) 24000/F(kHz) 30	(dBuV/m) - - -	-	distance (m) 300 30 30		
Limit:	0.009MHz-0.490MHz 0.490MHz-1.705MHz 1.705MHz-30MHz 30MHz-88MHz	(microvolt/meter) 2400/F(kHz) 24000/F(kHz) 30 29.9	(dBuV/m) - - 40.0	- - - Quasi-peak	distance (m) 300 30 30 10 10		
Limit:	0.009MHz-0.490MHz 0.490MHz-1.705MHz 1.705MHz-30MHz 30MHz-88MHz 88MHz-216MHz	(microvolt/meter) 2400/F(kHz) 24000/F(kHz) 30 29.9 44.7	(dBuV/m) - - 40.0 43.5	- - Quasi-peak Quasi-peak	distance (m) 300 30 30 10 10 10 10		
Limit:	0.009MHz-0.490MHz 0.490MHz-1.705MHz 1.705MHz-30MHz 30MHz-88MHz 88MHz-216MHz 216MHz-960MHz	(microvolt/meter) 2400/F(kHz) 24000/F(kHz) 30 29.9 44.7 60.3	(dBuV/m) - - 40.0 43.5 46.0	- - Quasi-peak Quasi-peak Quasi-peak	distance (m) 300 30 30 10 10 10 10		
Limit:	0.009MHz-0.490MHz 0.490MHz-1.705MHz 1.705MHz-30MHz 30MHz-88MHz 216MHz-216MHz 216MHz-960MHz 960MHz-1GHz Above 1GHz Note: 15.35(b), Unless of	(microvolt/meter) 2400/F(kHz) 24000/F(kHz) 30 29.9 44.7 60.3 100 500 therwise specified,	(dBuV/m) - - 40.0 43.5 46.0 54.0 54.0 the limit on	- - Quasi-peak Quasi-peak Quasi-peak Quasi-peak Average peak radio fre	distance (m) 300 30 10 10 10 10 3 equency		
Limit:	0.009MHz-0.490MHz         0.490MHz-1.705MHz         1.705MHz-30MHz         30MHz-88MHz         88MHz-216MHz         216MHz-960MHz         960MHz-1GHz         Above 1GHz	(microvolt/meter) 2400/F(kHz) 24000/F(kHz) 30 29.9 44.7 60.3 100 500 therwise specified, above the maximu equipment under	(dBuV/m) - - 40.0 43.5 46.0 54.0 54.0 the limit on um permitted test. This p	- - Quasi-peak Quasi-peak Quasi-peak Quasi-peak Average peak radio fre	distance (m) 300 30 10 10 10 10 3 equency ission limit		



Report No.: SZEM160300123401 Page: 59 of 95

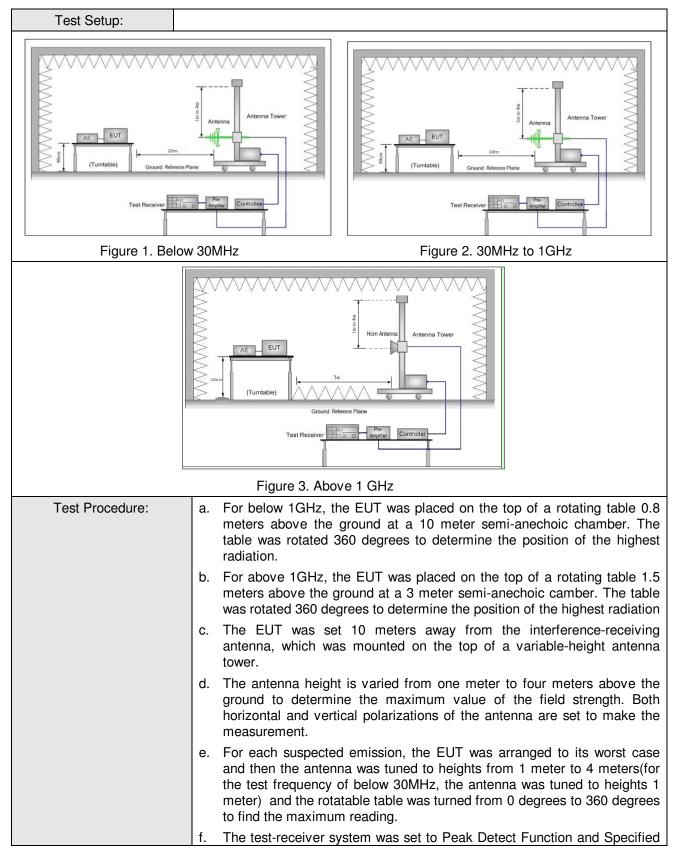

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160300123401 Page: 60 of 95

	Bandwidth with Maximum Hold Mode.		
	g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.		
	h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel		
	i. Repeat above procedures until all frequencies measured was complete.		
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.		
	Transmitting mode		
Final Test Mode:	Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case		
	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;		
	6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case		
	of 802.11n(HT20)		
	For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11b at lowest channel is the worst case.		
	Only the worst case is recorded in the report.		
Instruments Used:	Refer to section 5.10 for details		
Test Results:	Pass		


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160300123401 Page: 61 of 95

#### 6.8.1 Radiated emission below 1GHz



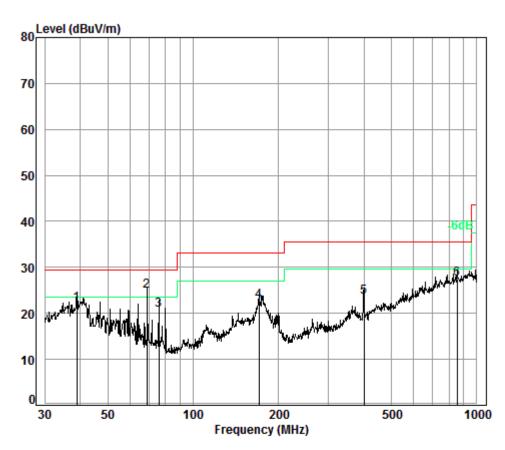


Condition: 10m Vertical Job No. : 1234CR Test Mode: TX

	-			Preamp				0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
_	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	38.89	6.78	13.18	32.98	34.94	21.92	29.50	-7.58
2 pp	68.87	6.92	10.27	32.91	40.53	24.81	29.50	-4.69
3	75.71	7.02	9.17	32.88	37.51	20.82	29.50	-8.68
4	170.79	7.50	12.30	32.72	35.57	22.65	33.10	-10.45
5	400.43	8.30	14.87	32.60	32.95	23.52	35.60	-12.08
6	851.04	9.36	21.61	32.55	28.96	27.38	35.60	-8.22



Report No.: SZEM160300123401 Page: 62 of 95



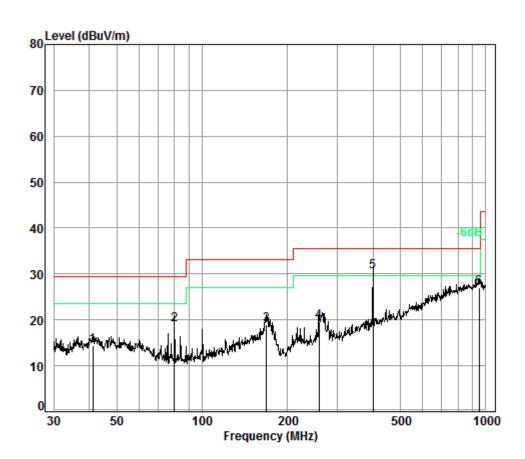

Condition: 10m HORIZONTAL Job No. : 1234CR Test Mode: TX

		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	41.28	6.80	13.21	32.99	27.38	14.40	29.50	-15.10
2	79.80	7.10	8.57	32.87	36.21	19.01	29.50	-10.49
3	169.01	7.50	12.51	32.72	31.77	19.06	33.10	-14.04
4	258.33	7.90	11.44	32.64	32.85	19.55	35.60	-16.05
5 pp	400.43	8.30	14.87	32.60	39.96	30.53	35.60	-5.07
6	948.76	9.57	22.72	32.50	27.16	26.95	35.60	-8.65



Report No.: SZEM160300123401 Page: 63 of 95

#### 6.8.2 Transmitter emission above 1GHz

Test mode:	802.1	1b	Test ch	Test channel:		Lowest Remark:		Peak
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3589.562	32.08	7.66	38.40	48.02	49.36	74	-24.64	Vertical
4824.000	34.12	8.90	38.75	48.15	52.42	74	-21.58	Vertical
5999.562	34.70	10.56	38.96	46.12	52.42	74	-21.58	Vertical
7236.000	35.58	10.69	37.63	43.47	52.11	74	-21.89	Vertical
9648.000	37.10	12.52	36.29	37.86	51.19	74	-22.81	Vertical
12603.270	37.90	14.44	37.75	38.15	52.74	74	-21.26	Vertical
3881.276	32.98	7.77	38.52	45.95	48.18	74	-25.82	Horizontal
4824.000	34.12	8.90	38.75	49.04	53.31	74	-20.69	Horizontal
6034.386	34.72	10.52	38.91	46.05	52.38	74	-21.62	Horizontal
7236.000	35.58	10.69	37.63	42.54	51.18	74	-22.82	Horizontal
9648.000	37.10	12.52	36.29	35.28	48.61	74	-25.39	Horizontal
12603.270	37.90	14.44	37.75	36.49	51.08	74	-22.92	Horizontal

Test mode: 802.11b	Test channel:	Middle	Remark:	Peak	
--------------------	---------------	--------	---------	------	--

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization
3579.190	32.07	7.66	38.40	48.32	49.65	74	-24.35	Vertical
4874.000	34.17	8.97	38.76	48.21	52.59	74	-21.41	Vertical
6016.949	34.71	10.54	38.94	46.49	52.80	74	-21.20	Vertical
7311.000	35.54	10.72	37.59	41.91	50.58	74	-23.42	Vertical
9748.000	37.10	12.58	36.16	38.06	51.58	74	-22.42	Vertical
12676.420	37.94	14.65	37.82	37.92	52.69	74	-21.31	Vertical
3377.918	31.80	7.60	38.31	45.88	46.97	74	-27.03	Horizontal
4874.000	34.17	8.97	38.76	48.41	52.79	74	-21.21	Horizontal
6016.949	34.71	10.54	38.94	46.36	52.67	74	-21.33	Horizontal
7311.000	35.54	10.72	37.59	41.69	50.36	74	-23.64	Horizontal
9748.000	37.10	12.58	36.16	37.54	51.06	74	-22.94	Horizontal
12603.270	37.90	14.44	37.75	37.36	51.95	74	-22.05	Horizontal



Report No.: SZEM160300123401 Page: 64 of 95

Test mode:	802.1	1b	Test ch	annel:	Highest	Remark	•	Peak	
							-		
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization	
3589.562	32.08	7.66	38.40	46.86	48.20	74	-25.80	Vertical	
4924.000	34.22	9.04	38.77	47.90	52.39	74	-21.61	Vertical	
6087.002	34.74	10.45	38.85	47.05	53.39	74	-20.61	Vertical	
7386.000	35.51	10.75	37.56	40.74	49.44	74	-24.56	Vertical	
9848.000	37.15	12.63	36.03	37.26	51.01	74	-22.99	Vertical	
12566.850	37.87	14.34	37.72	37.38	51.87	74	-22.13	Vertical	
3748.808	32.70	7.72	38.47	45.91	47.86	74	-26.14	Horizontal	
4924.000	34.22	9.04	38.77	48.56	53.05	74	-20.95	Horizontal	
6016.949	34.71	10.54	38.94	45.76	52.07	74	-21.93	Horizontal	
7386.000	35.51	10.75	37.56	40.54	49.24	74	-24.76	Horizontal	
9848.000	37.15	12.63	36.03	38.08	51.83	74	-22.17	Horizontal	
12639.790	37.92	14.55	37.79	37.76	52.44	74	-21.56	Horizontal	

 Test mode:
 802.11g
 Test channel:
 Lowest
 Remark:
 Peak

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization
3770.567	32.78	7.73	38.47	45.86	47.90	74	-26.10	Vertical
4824.000	34.12	8.90	38.75	46.06	50.33	74	-23.67	Vertical
5999.562	34.70	10.56	38.96	46.30	52.60	74	-21.40	Vertical
7236.000	35.58	10.69	37.63	44.09	52.73	74	-21.27	Vertical
9648.000	37.10	12.52	36.29	37.15	50.48	74	-23.52	Vertical
12530.530	37.83	14.24	37.68	37.67	52.06	74	-21.94	Vertical
3727.173	32.61	7.71	38.46	46.35	48.21	74	-25.79	Horizontal
4824.000	34.12	8.90	38.75	47.08	51.35	74	-22.65	Horizontal
6008.249	34.70	10.55	38.95	46.50	52.80	74	-21.20	Horizontal
7236.000	35.58	10.69	37.63	43.80	52.44	74	-21.56	Horizontal
9648.000	37.10	12.52	36.29	36.64	49.97	74	-24.03	Horizontal
12566.850	37.87	14.34	37.72	37.93	52.42	74	-21.58	Horizontal



Report No.: SZEM160300123401 Page: 65 of 95

Test mode:	802.1	1g	Test ch	annel:	Middle	Remark	:	Peak
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization
3599.965	32.10	7.67	38.41	46.39	47.75	74	-26.25	Vertical
4874.000	34.17	8.97	38.76	46.21	50.59	74	-23.41	Vertical
6025.661	34.71	10.53	38.93	46.40	52.71	74	-21.29	Vertical
7311.000	35.54	10.72	37.59	42.28	50.95	74	-23.05	Vertical
9748.000	37.10	12.58	36.16	37.28	50.80	74	-23.20	Vertical
12566.850	37.87	14.34	37.72	37.91	52.40	74	-21.60	Vertical
3705.664	32.53	7.71	38.45	46.23	48.02	74	-25.98	Horizontal
4874.000	34.17	8.97	38.76	47.56	51.94	74	-22.06	Horizontal
5999.562	34.70	10.56	38.96	47.00	53.30	74	-20.70	Horizontal
7311.000	35.54	10.72	37.59	41.25	49.92	74	-24.08	Horizontal
9748.000	37.10	12.58	36.16	37.43	50.95	74	-23.05	Horizontal
12585.040	37.89	14.39	37.73	37.43	51.98	74	-22.02	Horizontal

 Test mode:
 802.11g
 Test channel:
 Highest
 Remark:
 Peak

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization
3759.672	32.74	7.73	38.47	45.75	47.75	74	-26.25	Vertical
4924.000	34.22	9.04	38.77	47.60	52.09	74	-21.91	Vertical
6016.949	34.71	10.54	38.94	46.40	52.71	74	-21.29	Vertical
7386.000	35.51	10.75	37.56	40.69	49.39	74	-24.61	Vertical
9848.000	37.15	12.63	36.03	37.49	51.24	74	-22.76	Vertical
12530.530	37.83	14.24	37.68	37.32	51.71	74	-22.29	Vertical
3641.878	32.27	7.68	38.42	46.07	47.60	74	-26.40	Horizontal
4924.000	34.22	9.04	38.77	48.80	53.29	74	-20.71	Horizontal
5999.562	34.70	10.56	38.96	46.41	52.71	74	-21.29	Horizontal
7386.000	35.51	10.75	37.56	42.65	51.35	74	-22.65	Horizontal
9848.000	37.15	12.63	36.03	37.37	51.12	74	-22.88	Horizontal
12494.320	37.79	14.15	37.65	38.00	52.29	74	-21.71	Horizontal



Report No.: SZEM160300123401 Page: 66 of 95

Test mode:	802.1	1n(HT20)	Test ch	annel:	Lowest	Remark	:	Peak
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization
3770.567	32.78	7.73	38.47	45.55	47.59	74	-26.41	Vertical
4824.000	34.12	8.90	38.75	45.22	49.49	74	-24.51	Vertical
6087.002	34.74	10.45	38.85	46.14	52.48	74	-21.52	Vertical
7236.000	35.58	10.69	37.63	45.06	53.70	74	-20.30	Vertical
9648.000	37.10	12.52	36.29	34.63	47.96	74	-26.04	Vertical
12566.850	37.87	14.34	37.72	38.42	52.91	74	-21.09	Vertical
3803.444	32.90	7.74	38.49	44.84	46.99	74	-27.01	Horizontal
4824.000	34.12	8.90	38.75	46.35	50.62	74	-23.38	Horizontal
5999.562	34.70	10.56	38.96	45.93	52.23	74	-21.77	Horizontal
7236.000	35.58	10.69	37.63	41.65	50.29	74	-23.71	Horizontal
9648.000	37.10	12.52	36.29	33.99	47.32	74	-26.68	Horizontal
12676.420	37.94	14.65	37.82	38.05	52.82	74	-21.18	Horizontal

Test mode:	802.11n(HT20)	Test channel:	Middle	Remark:	Peak

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization
3814.467	32.91	7.75	38.49	45.44	47.61	74	-26.39	Vertical
4874.000	34.17	8.97	38.76	45.61	49.99	74	-24.01	Vertical
6051.874	34.73	10.49	38.89	44.91	51.24	74	-22.76	Vertical
7311.000	35.54	10.72	37.59	44.56	53.23	74	-20.77	Vertical
9748.000	37.10	12.58	36.16	39.30	52.82	74	-21.18	Vertical
12603.270	37.90	14.44	37.75	38.56	53.15	74	-20.85	Vertical
3803.444	32.90	7.74	38.49	45.09	47.24	74	-26.76	Horizontal
4874.000	34.17	8.97	38.76	45.33	49.71	74	-24.29	Horizontal
6104.642	34.75	10.42	38.82	44.89	51.24	74	-22.76	Horizontal
7311.000	35.54	10.72	37.59	44.32	52.99	74	-21.01	Horizontal
9748.000	37.10	12.58	36.16	39.24	52.76	74	-21.24	Horizontal
12676.420	37.94	14.65	37.82	39.02	53.79	74	-20.21	Horizontal



Report No.: SZEM160300123401 Page: 67 of 95

Test mode:	802.1	1n(HT20)	Test ch	annel:	Highest	Remark	:	Peak
					1			
Frequency	Antenna factors	Cable loss	Preamp factor	Reading Level	Emission Level	Limit	Over Limit	Polarization
(MHz)	(dB/m)	(dB)	(dB)	(dBµV)	(dBµV/m)	(dBµV/m)	(dB)	
3803.444	32.90	7.74	38.49	44.80	46.95	74	-27.05	Vertical
4924.000	34.22	9.04	38.77	47.08	51.57	74	-22.43	Vertical
5999.562	34.70	10.56	38.96	45.67	51.97	74	-22.03	Vertical
7386.000	35.51	10.75	37.56	44.86	53.56	74	-20.44	Vertical
9848.000	37.15	12.63	36.03	39.39	53.14	74	-20.86	Vertical
12676.420	37.94	14.65	37.82	38.20	52.97	74	-21.03	Vertical
3814.467	32.91	7.75	38.49	44.51	46.68	74	-27.32	Horizontal
4924.000	34.22	9.04	38.77	46.62	51.11	74	-22.89	Horizontal
6016.949	34.71	10.54	38.94	44.75	51.06	74	-22.94	Horizontal
7386.000	35.51	10.75	37.56	41.16	49.86	74	-24.14	Horizontal
9848.000	37.15	12.63	36.03	39.21	52.96	74	-21.04	Horizontal
12603.270	37.90	14.44	37.75	38.37	52.96	74	-21.04	Horizontal

#### Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor


- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.



Report No.: SZEM160300123401 Page: 68 of 95

#### 6.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section	15.209 and 15.205						
Test Method:	ANSI C63.10: 2013 Section	n 11.12						
Test Site:	Measurement Distance: 3n	n (Semi-Anechoic Chambe	er)					
Limit:	Frequency	Limit (dBuV/m @3m)	Remark					
	30MHz-88MHz	40.0	Quasi-peak Value					
	88MHz-216MHz	88MHz-216MHz 43.5 Quasi-peak Value						
	216MHz-960MHz	46.0	Quasi-peak Value					
	960MHz-1GHz	54.0	Quasi-peak Value					
		54.0	Average Value					
	Above 1GHz 74.0 Peak Value							
Test Setup:								

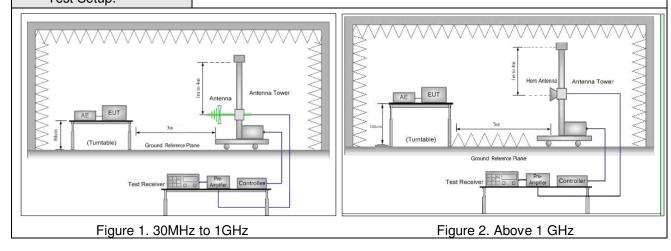



Report No.: SZEM160300123401 Page: 69 of 95

Test Procedure:       a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.         b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.         c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.         d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.         e. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.         f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.         g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel         h. Test the EUT at Transmitting mode, found the Transmitting mode.         Final Test Mode:       Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case         Final Test Mode:       Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case of 802.110; 6Mbps of rate is the worst		
1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.         c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.         d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.         e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was turned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.         f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.         g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel         h. Test the EUT in the lowest channel , the Highest channel         h. Test the EUT at Transmitting mode.         Final Test Mode:       Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case         Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11b; 0Mbps of rate is the worst case of 802.11b; 0Mbps of rate is the worst case of 802.11b; 0Mbps of rate is the worst case of 802.11b;	Test Procedure:	meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest
antenna, which was mounted on the top of a variable-height antenna tower.d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.e. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel h. Test the EUT in the lowest channel , the Highest channel h. Test the EUT in the lowest channel , the Highest channel i. Repeat above procedures until all frequencies measured was complete.Final Test Mode:Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20). Only the worst case is recorded in the report.Instruments Used:Refer to section 5.10 for details		1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest
ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.e.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.f.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.g.Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel h.h.Test the EUT in the lowest channel , the Highest channel i.h.Test the EUT in the lowest channel , the Highest channel ii.h.Test the EUT at Transmitting mode.Final Test Mode:Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20). Only the worst case is recorded in the report.Instruments Used:Refer to section 5.10 for details		antenna, which was mounted on the top of a variable-height antenna
and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.f.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.g.Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel h. Test the EUT in the lowest channel , the Highest channel i. Repeat above procedures until all frequencies measured was complete.Exploratory Test Mode:Transmitting with all kind of modulations, data rates. Transmitting mode.Final Test Mode:Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20). Only the worst case is recorded in the report.Instruments Used:Refer to section 5.10 for details		ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make
Specified Bandwidth with Maximum Hold Mode.g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel h. Test the EUT in the lowest channel , the Highest channel i. Repeat above procedures until all frequencies measured was complete.Exploratory Test Mode:Transmitting with all kind of modulations, data rates. Transmitting mode.Final Test Mode:Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20). Only the worst case is recorded in the report.Instruments Used:Refer to section 5.10 for details		and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to
Image: Construct of the systemImage: Cons		
i.Repeat above procedures until all frequencies measured was complete.Exploratory Test Mode:Transmitting with all kind of modulations, data rates. Transmitting mode.Final Test Mode:Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case 		transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for
complete.Exploratory Test Mode:Transmitting with all kind of modulations, data rates. Transmitting mode.Final Test Mode:Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20). Only the worst case is recorded in the report.Instruments Used:Refer to section 5.10 for details		h. Test the EUT in the lowest channel, the Highest channel
Transmitting mode.Final Test Mode:Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20). Only the worst case is recorded in the report.Instruments Used:Refer to section 5.10 for details		
Final Test Mode:       Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case         Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;         6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20).         Only the worst case is recorded in the report.         Instruments Used:       Refer to section 5.10 for details	Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.
which it is worse case         Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;         6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20).         Only the worst case is recorded in the report.         Instruments Used:       Refer to section 5.10 for details		Transmitting mode.
6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n (HT20).         Only the worst case is recorded in the report.         Instruments Used:       Refer to section 5.10 for details	Final Test Mode:	• •
case of 802.11n(HT20).         Only the worst case is recorded in the report.         Instruments Used:       Refer to section 5.10 for details		Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;
Instruments Used: Refer to section 5.10 for details		
		Only the worst case is recorded in the report.
Test Results: Pass	Instruments Used:	Refer to section 5.10 for details
	Test Results:	Pass




-

#### SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM160300123401 Page: 70 of 95


lest plot as follows:							
Worse case mode:	802.11b	Test channel:	Lowest	Remark:	Peak	Vertical	

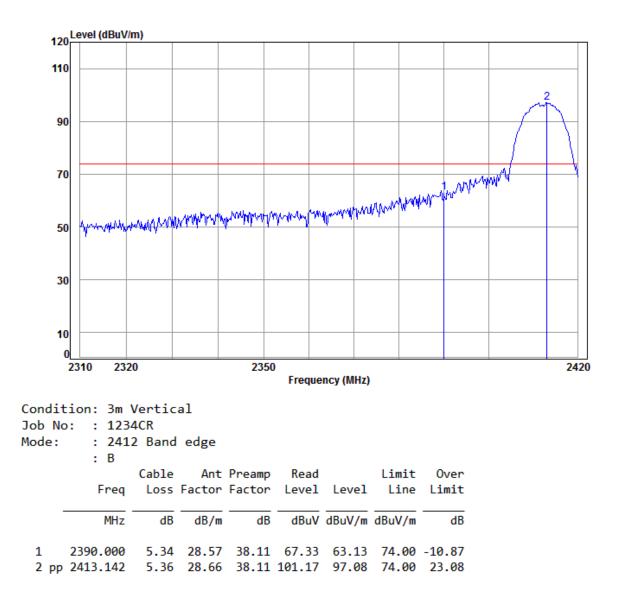



Report No.: SZEM160300123401 Page: 71 of 95


Worse case mode: 802.11b	Test channel:	Lowest	Remark:	Peak	Horizontal	
--------------------------	---------------	--------	---------	------	------------	--

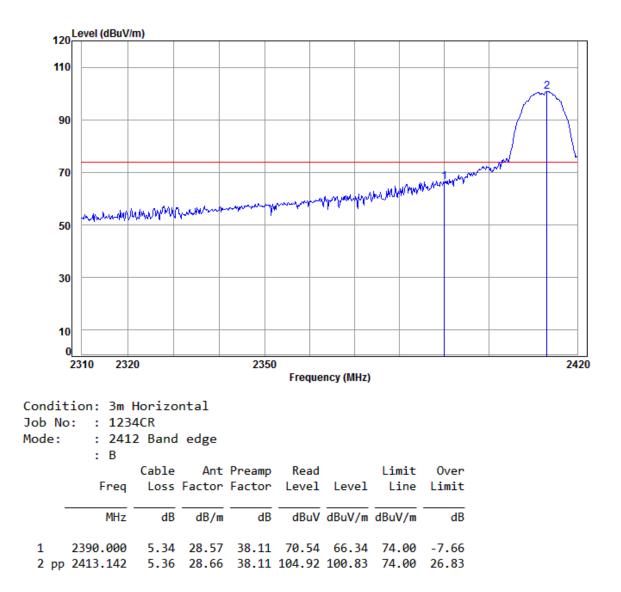



Report No.: SZEM160300123401 Page: 72 of 95

Worse case mode:	802.11b	Test channel:	Lowest	Remark:	Average	Vertical	
------------------	---------	---------------	--------	---------	---------	----------	--

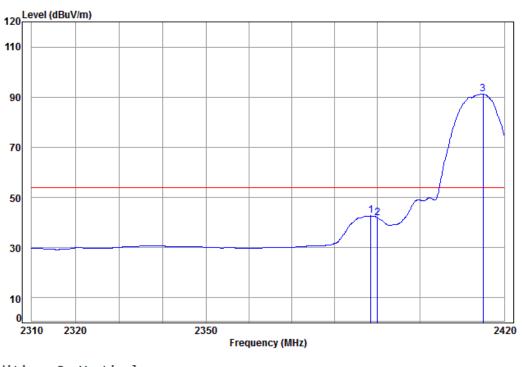

Condition:	3m Vertical				
Job No: :	1234CR				
Mode: :	2412 Band edge				


		В

		. b Freq			Preamp Factor				
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		2388.460	5.34	28.57	38.11	46.87	42.67	54.00	-11.33
2		2390.000	5.34	28.57	38.11	46.04	41.84	54.00	-12.16
3	рр	2414.939	5.36	28.67	38.11	95.23	91.15	54.00	37.15



Report No.: SZEM160300123401 Page: 73 of 95


Worse case mode: 802.11b	Test channel:	Lowest	Remark:	Average	Horizontal	
--------------------------	---------------	--------	---------	---------	------------	--

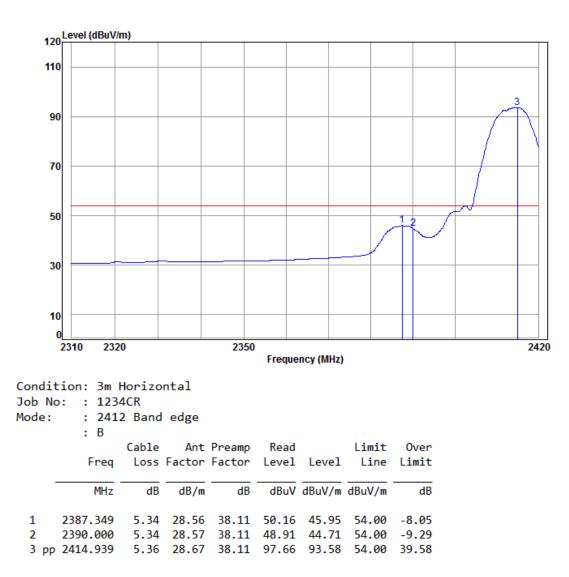



Report No.: SZEM160300123401 Page: 74 of 95


Worse case mode: 802.11b	Test channel:	Highest	Remark:	Peak	Vertical	
--------------------------	---------------	---------	---------	------	----------	--

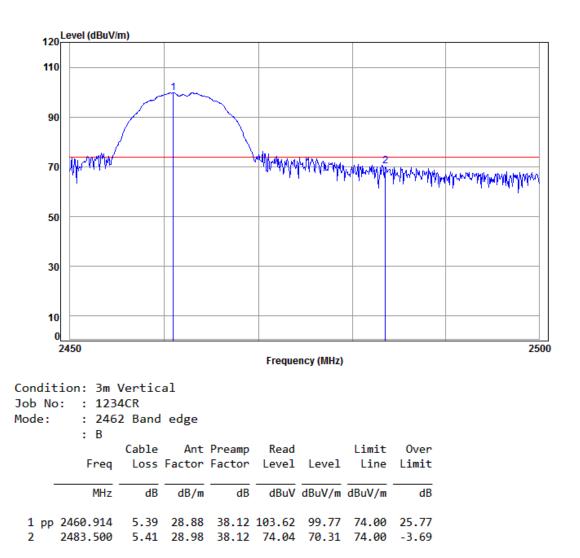



Report No.: SZEM160300123401 Page: 75 of 95


Worse case mode: 802.11b	Test channel:	Highest	Remark:	Peak	Horizontal	
--------------------------	---------------	---------	---------	------	------------	--

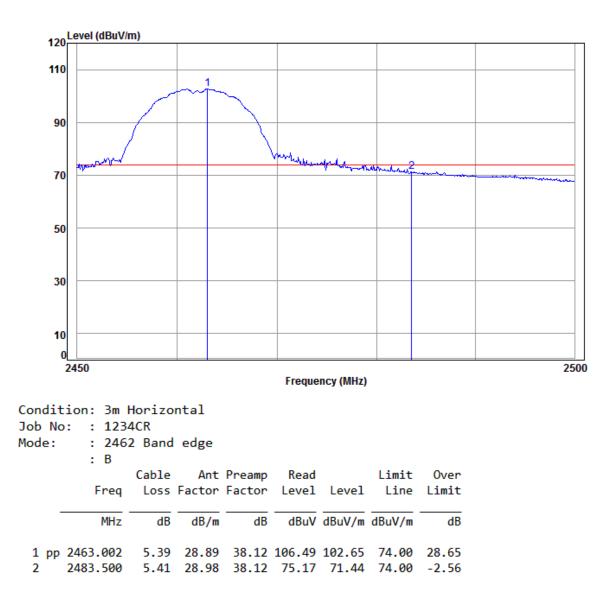



Report No.: SZEM160300123401 Page: 76 of 95


orse case mode: 802.11b	Test channel:	Highest	Remark:	Average	Vertical	
-------------------------	---------------	---------	---------	---------	----------	--

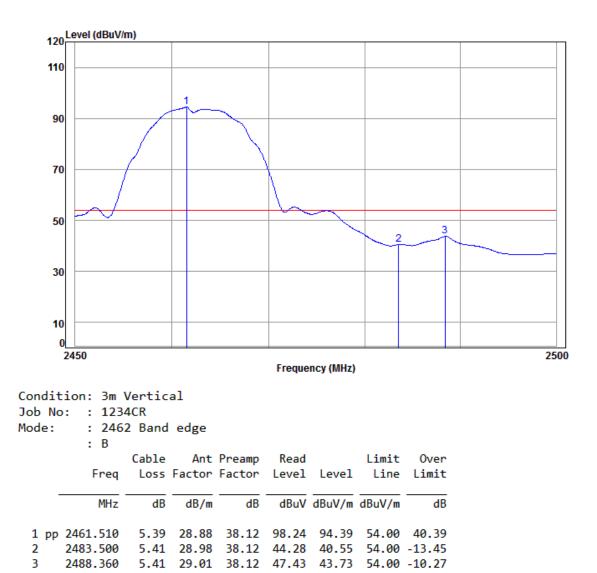



Report No.: SZEM160300123401 Page: 77 of 95


Worse case mode: 802.11b	Test channel:	Highest	Remark:	Average	Horizontal	
--------------------------	---------------	---------	---------	---------	------------	--

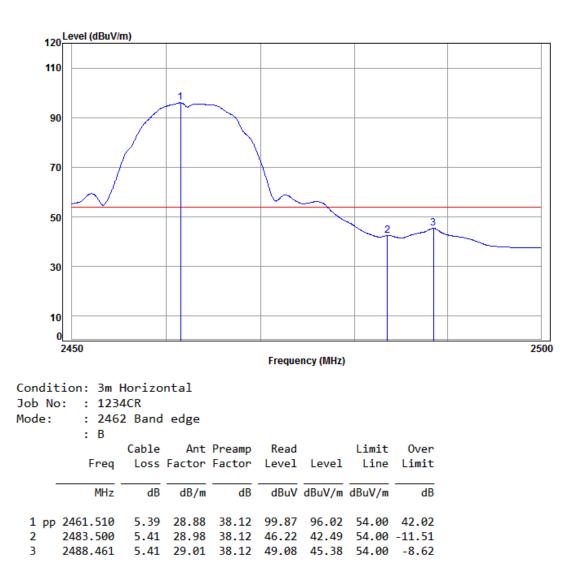



Report No.: SZEM160300123401 Page: 78 of 95


Worse case mode:	802.11g	Test channel:	Lowest	Remark:	Peak	Vertical

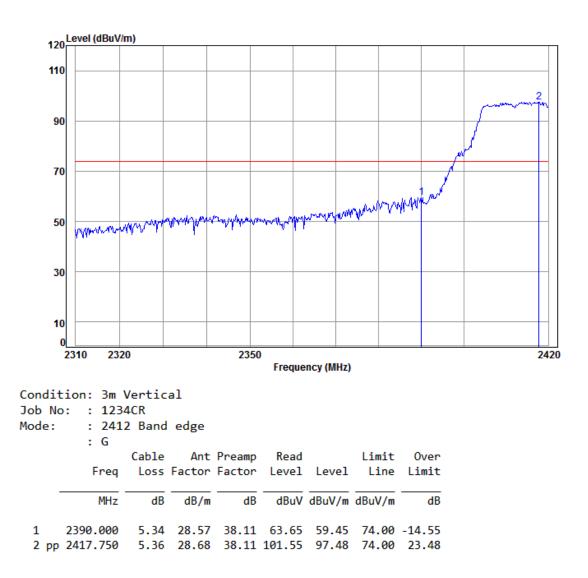



Report No.: SZEM160300123401 Page: 79 of 95


Worse case mode: 802.11g	Test channel:	Lowest	Remark:	Peak	Horizontal	
--------------------------	---------------	--------	---------	------	------------	--

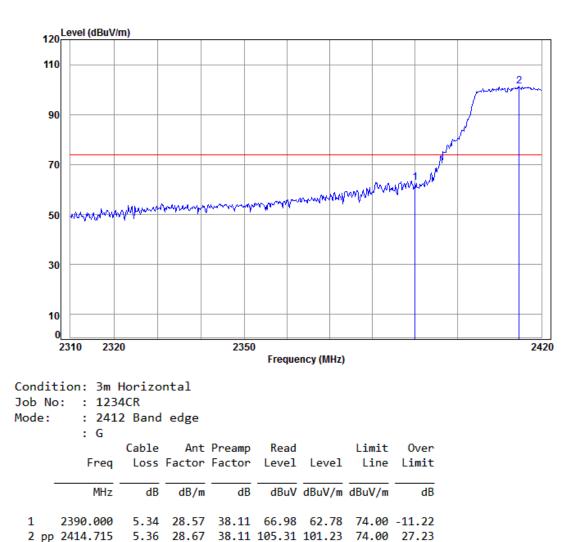



Report No.: SZEM160300123401 Page: 80 of 95


Worse case mode: 802.11g	Test channel:	Lowest	Remark:	Average	Vertical	
--------------------------	---------------	--------	---------	---------	----------	--

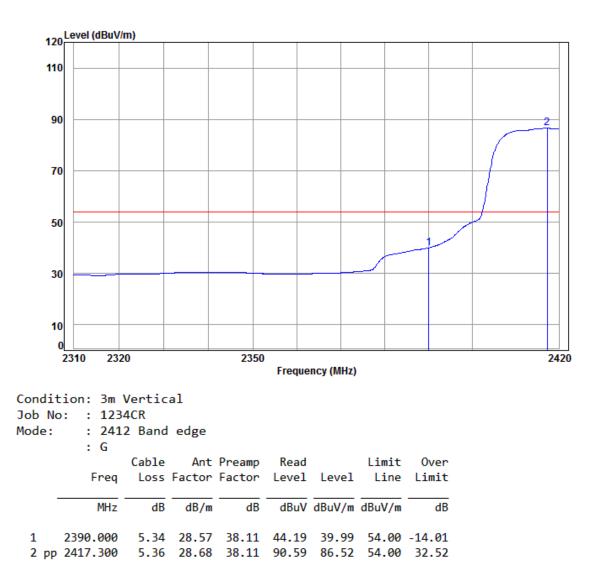



Report No.: SZEM160300123401 Page: 81 of 95

Worse case mode:	802.11g	Test channel:	Lowest	Remark:	Average	Horizontal	
------------------	---------	---------------	--------	---------	---------	------------	--

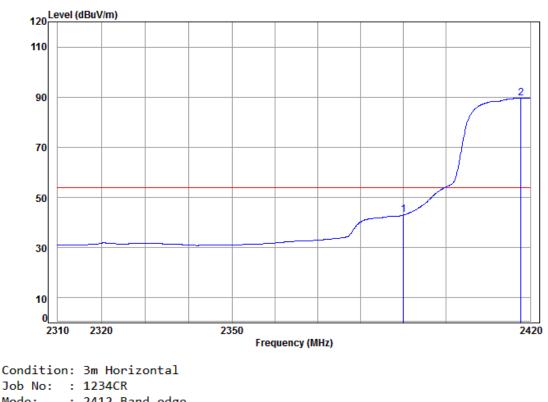

JOD NO	D: : 125	4CK						
Mode:	: 241	2 Band	edge					
	: G							
		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	5.34	28.57	38.11	47.22	43.02	54.00	-10.98


2 pp 2417.750

5.36 28.68 38.11 93.63 89.56 54.00 35.56



Report No.: SZEM160300123401 Page: 82 of 95


Worse case mode:	802.11g	Test channel:	Highest	Remark:	Peak	Vertical	
------------------	---------	---------------	---------	---------	------	----------	--

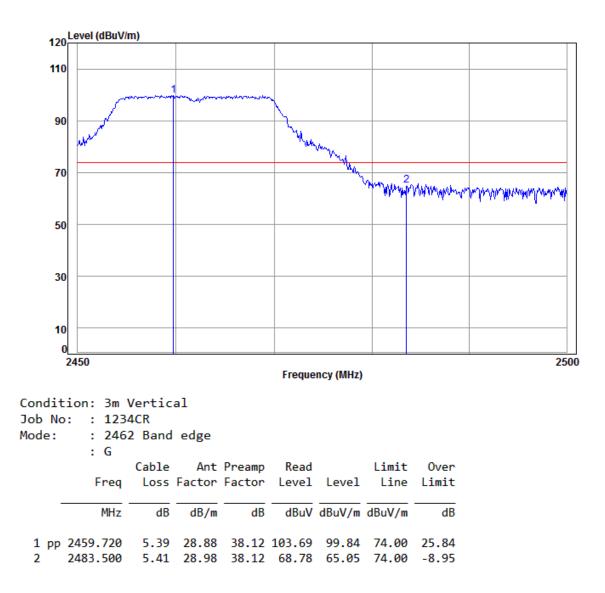



Report No.: SZEM160300123401 Page: 83 of 95


Worse case mode:	802.11g	Test channel:	Highest	Remark:	Peak	Horizontal	
------------------	---------	---------------	---------	---------	------	------------	--

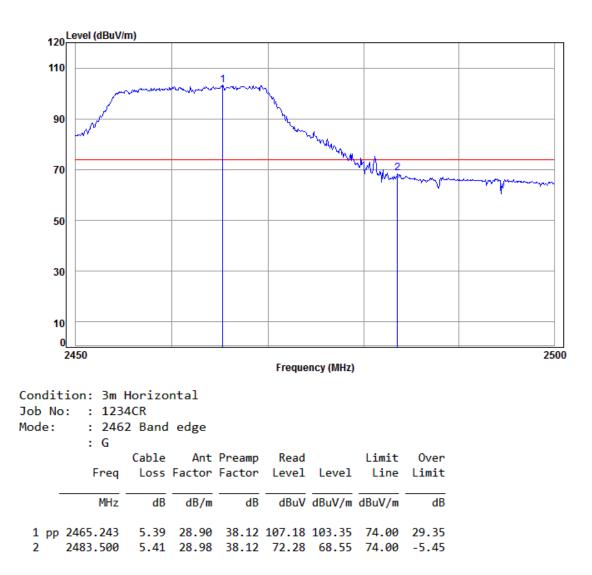



Report No.: SZEM160300123401 Page: 84 of 95


Worse case mode: 802.11g	Test channel:	Highest	Remark:	Average	Vertical
--------------------------	---------------	---------	---------	---------	----------

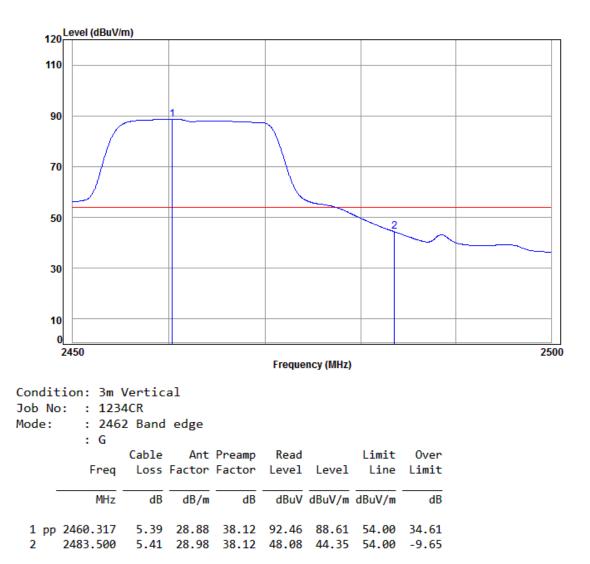



Report No.: SZEM160300123401 Page: 85 of 95


Worse case mode:   802.11g   Test channel:   Highest   Remark:   Average   Horizontal	ntal
---	------

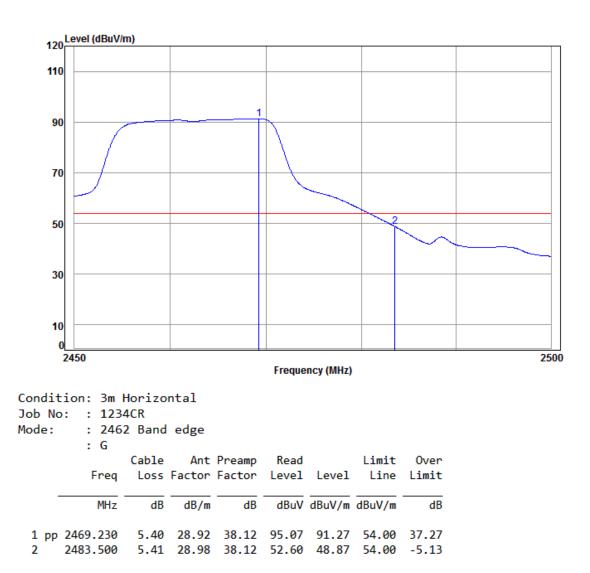



Report No.: SZEM160300123401 Page: 86 of 95


Worse case mode: 802.11n(HT20)	Test channel:	Lowest	Remark:	Peak	Vertical
--------------------------------	---------------	--------	---------	------	----------

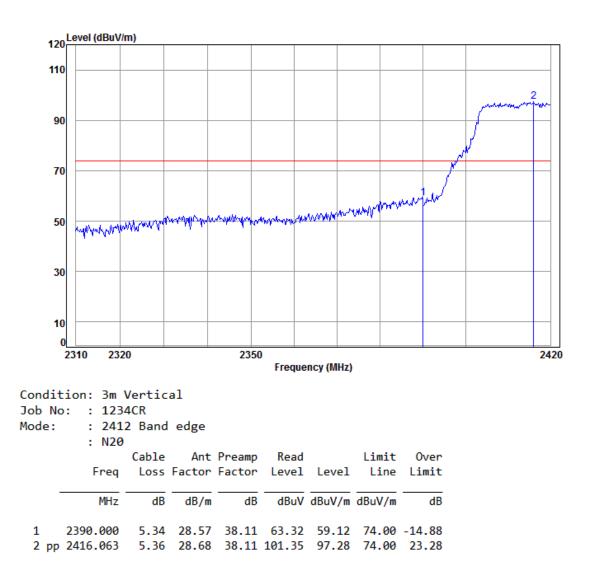



Report No.: SZEM160300123401 Page: 87 of 95


Worse	case mode:	802.11n(HT20)	Test channel:	Lowest	Remark:	Peak	Horizontal	l
-------	------------	---------------	---------------	--------	---------	------	------------	---

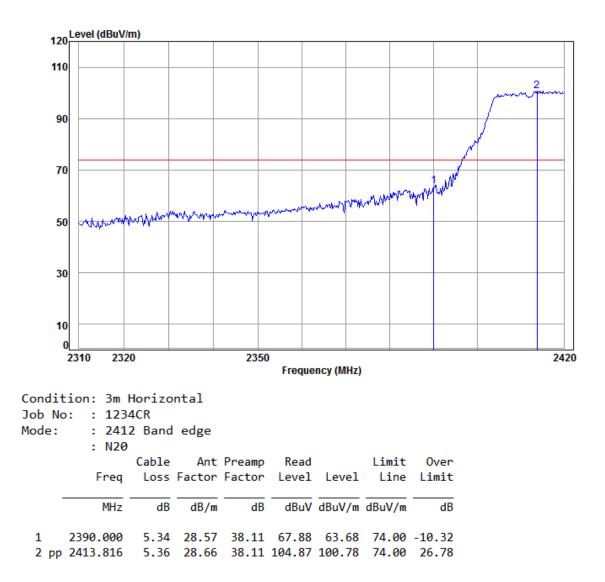



Report No.: SZEM160300123401 Page: 88 of 95


Worse case mode:	802.11n(HT20)	Test channel:	Lowest	Remark:	Average	Vertical	
------------------	---------------	---------------	--------	---------	---------	----------	--

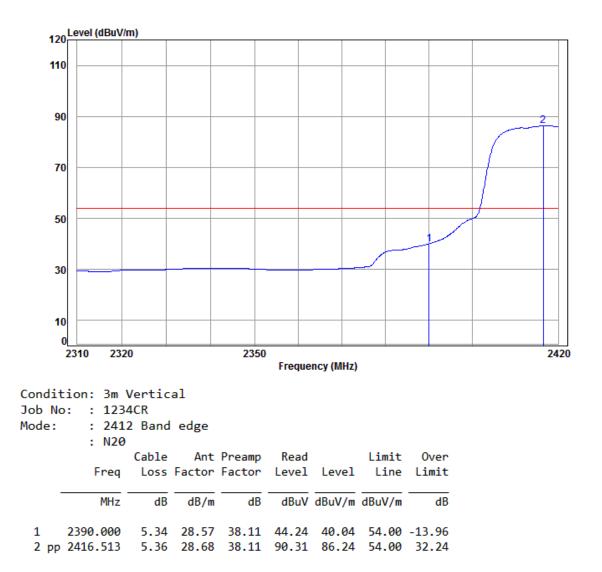



Report No.: SZEM160300123401 Page: 89 of 95

orse case mode: 802.11n(HT20	Test channel:	Lowest	Remark:	Average	Horizontal	
------------------------------	---------------	--------	---------	---------	------------	--

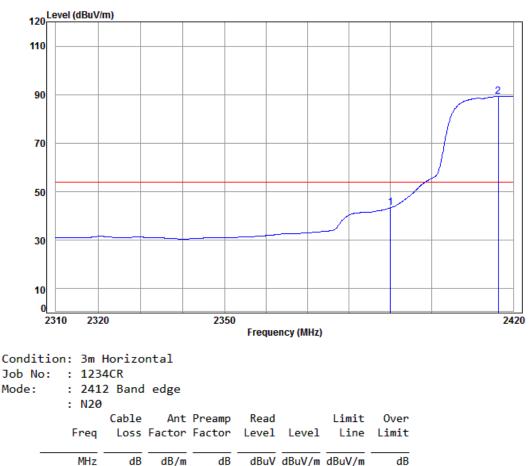


1 2390.000	5.34	28.57	38.11	47.61	43.41	54.00	-10.59
2 pp 2416.288	5 36	28 68	38 11	93 33	89 26	54 00	35 26
2 pp 2410.200	5.50	20.00	20.11		05.20	34.00	55.20



Report No.: SZEM160300123401 Page: 90 of 95


Worse case mode:	802.11n(HT20)	Test channel:	Highest	Remark:	Peak	Vertical	
------------------	---------------	---------------	---------	---------	------	----------	--

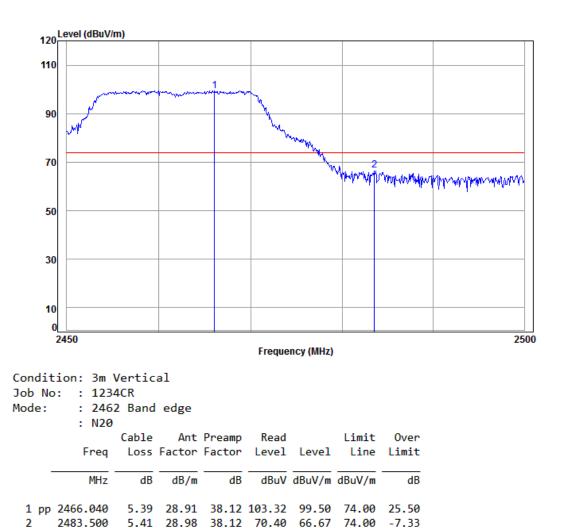



Report No.: SZEM160300123401 Page: 91 of 95

Worse case mode:	802.11n(HT20)	Test channel:	Highest	Remark:	Peak	Horizontal	
------------------	---------------	---------------	---------	---------	------	------------	--

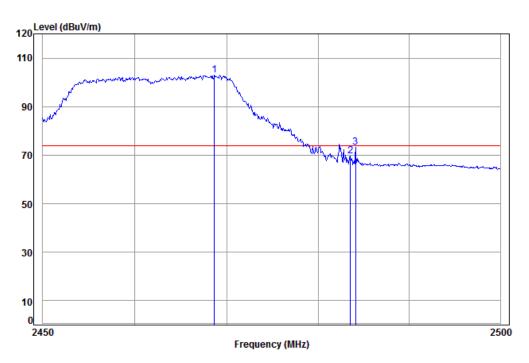


Condition:	3m Horizontal
Job No: :	1234CR
Mode: :	2462 Band edge

ode:	: 246 : N20	2 Band	edge					
		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2468.632	5.40	28.92	38.12	106.76	102.96	74.00	28.96
2	2483.500	5.41	28.98	38.12	73.44	69.71	74.00	-4.29
3	2484.091	5.41	28.99	38.12	76.88	73.16	74.00	-0.84



Report No.: SZEM160300123401 Page: 92 of 95


۷	Vorse case mode:	802.11n(HT20)	Test channel:	Highest	Remark:	Average	Vertical	
---	------------------	---------------	---------------	---------	---------	---------	----------	--

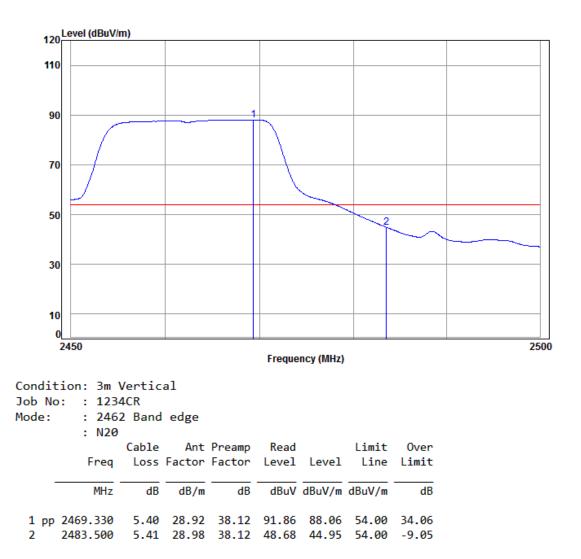



Report No.: SZEM160300123401 Page: 93 of 95

Worse case mode: 802.11	n(HT20) Test channel:	Highest R	Remark: Average	Horizontal
-------------------------	-----------------------	-----------	-----------------	------------

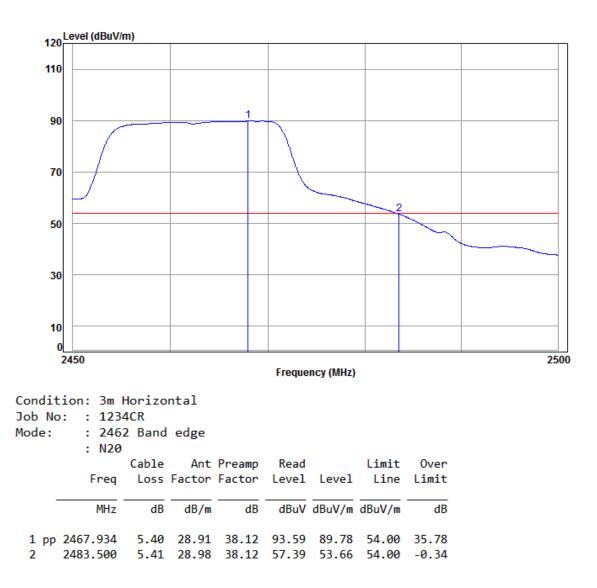

#### Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor



Report No.: SZEM160300123401 Page: 94 of 95


#### 7 Photographs - EUT Test Setup

Test model No.: ESO-12S

#### 7.1 Conducted Emission




#### 7.2 Radiated Emission

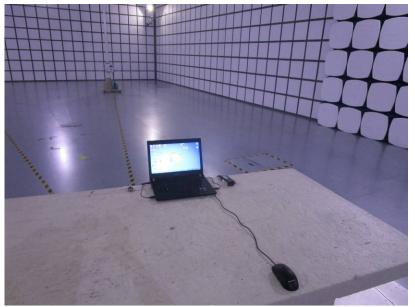



Report No.: SZEM160300123401 Page: 95 of 95

#### 7.3 Radiated Spurious Emission

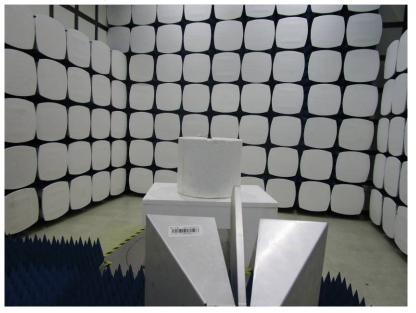

#### 8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1603001234CR.