



FCC TEST REPORT

FCC ID: 2AHN6-AUBE206

On Behalf of

Bytech NY Inc.

TWS MiniDsply Wthrpf

Model No.: iHome XT-45, HM-AU-BE-206

Prepared for : Bytech NY Inc.
Address : 2585 West 13th Street Brooklyn NY 11223 USA

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2007068-C01-R04
Date of Receipt : July 14, 2020
Date of Test : July 14, 2020 - July 16, 2020
Date of Report : July 20, 2020
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. Summary Of Standards And Results	6
1.1. Description of Standards and Results	6
2. General Information.....	7
2.1. Description of Device (EUT).....	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details	8
2.4. Block Diagram of connection between EUT and simulators	8
2.5. Test Mode Description.....	8
2.6. Test Conditions	8
2.7. Test Facility	9
2.8. Measurement Uncertainty.....	9
2.9. Test Equipment List.....	10
3. Maximum Peak Output Power	11
3.1. Limit	11
3.2. Test Procedure	11
3.3. Test Setup.....	11
3.4. Test Result	11
4. Bandwidth.....	12
4.1. Limit	12
4.2. Test Procedure	12
4.3. Test Result	12
5. Carrier Frequency Separation.....	19
5.1. Limit	19
5.2. Test Procedure	19
5.3. Test Result	19
6. Number Of Hopping Channel.....	21
6.1. Limit	21
6.2. Test Procedure	21
6.3. Test Result	21
7. Dwell Time.....	23
7.1. Test limit	23
7.2. Test Procedure	23
7.3. Test Result	23
8. Radiated Emissions.....	29
8.1. Limit	29
8.2. Block Diagram of Test setup	30
8.3. Test Procedure	31
8.4. Test Result	31
9. Band Edge Compliance	34

9.1. Block Diagram of Test Setup.....	34
9.2. Limit	34
9.3. Test Procedure	34
9.4. Test Result	34
10. Power Line Conducted Emissions	51
10.1. Block Diagram of Test Setup.....	51
10.2. Limit	51
10.3. Test Procedure	51
10.4. Test Result	51
11. Antenna Requirements	53
11.1. Limit	53
11.2. Result	53
12. Test Setup Photo	54
12.1. Photos of Radiated emission.....	54
13. Photos Of EUT	56

TEST REPORT DECLARATION

Applicant : Bytech NY Inc.
 Address : 2585 West 13th Street Brooklyn NY 11223 USA
 Manufacturer : Bytech NY Inc.
 Address : 2585 West 13th Street Brooklyn NY 11223 USA
 EUT Description : TWS MiniDsply Wthrf
 (A) Model No. : T1iHome XT-45, HM-AU-BE-206
 (B) Trademark : N/A

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.10:2013

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Lucas Pang
 Project Engineer



Approved by (name + signature).....: Simple Guan
 Project Manager



Date of issue..... : July 20, 2020

Revision History

Revision	Issue Date	Revisions	Revised By
V0	July 20, 2020	Initial released Issue	Lucas Pang

1. Summary Of Standards And Results

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.10 :2013	P
Bandwidth	FCC Part 15: 15.215 ANSI C63.10 :2013	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.10 :2013	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013	P
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013	P
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10 :2013	P
Antenna requirement	FCC Part 15: 15.203	P
Note:	<ol style="list-style-type: none"> 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable. 	

2. General Information

2.1. Description of Device (EUT)

Description	: TWS MiniDsply Wthrf
Trademark	: N/A
Model Number	: iHome XT-45, HM-AU-BE-206
DIFF.	: There is no difference except the name of the model. All tests are made with the iHome XT-45model.
Test Voltage	: DC 3.7V, DC 5V From Adapter
Radio Technology	: Bluetooth
Operation frequency	: 2402-2480MHz
Channel No.	: 79 Channels
Modulation type	: GFSK, $\pi/4$ DQPSK
Antenna Type	: Chip antenna, Maximum Gain is 1.75dBi
Software version	: V1.0
Hardware version	: V1.2

Note: 1. The product contains two earbuds with identical functions, which can be used in pairs.
2. Both modules have been tested, and this report only shows the worst data.


2.2. Accessories of Device (EUT)

Accessories1 : /
 Manufacturer : /
 Model : /
 Ratings : /

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification
1.	Notebook	N/A	N/A	N/A	N/A

2.4. Block Diagram of connection between EUT and simulators



2.5. Test Mode Description

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
GFSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
π /4 DQPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

July 15, 2019 Certificated by IC

Registration Number: CN0085

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.74dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB(Polarize: V)
	2.57dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.13dB(Polarize: H)
	4.16dB(Polarize: V)
Uncertainty for radio frequency	5.4×10^{-8}
Uncertainty for conducted RF Power	0.37dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	N/A	2019.09.06	1Year
Spectrum analyzer	ROHDE&SCHWARZ	FSU	1166.1660.26	2019.09.06	1Year
Spectrum analyzer	Agilent	N9020A	MY499100060	2019.09.05	1Year
Receiver	ROHDE&SCHWARZ	ESR	1316.3003K03-10208 2-Wa	2019.09.06	1Year
Receiver	R&S	ESCI	101165	2019.09.05	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	2019.09.07	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D(1201)	2020.04.12	2Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	00059	2019.09.07	2Year
Cable	Resenberger	N/A	No.1	2019.09.05	1Year
Cable	SCHWARZBECK	N/A	No.2	2019.09.05	1Year
Cable	SCHWARZBECK	N/A	No.3	2019.09.05	1Year
Pre-amplifier	HP	HP8347A	2834A00455	2019.09.05	1Year
Pre-amplifier	Agilent	8449B	3008A02664	2019.09.05	1Year
Temperature controller	Terchy	MHQ	120	2019.09.20	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126-466	2019.09.05	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	101043	2019.09.05	1 Year
20db Attenuator	ICPROBING	IATS1	82347	2019.09.20	1 Year
Power meter	Agilent	E4419B	GB40202122	2019.09.06	1 Year

3. Maximum Peak Output Power

3.1.Limit


Please refer section 15.247.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2.Test Procedure

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the average power detection.

3.3.Test Setup



3.4.Test Result

Mode	Freq (MHz)	Average Output Power (dBm)	Limit (dBm)	Result
GFSK	2402	-6.285	21	Pass
	2441	-5.812	21	Pass
	2480	-6.472	21	Pass
π /4 DQPSK	2402	-5.147	21	Pass
	2441	-5.339	21	Pass
	2480	-5.8	21	Pass
Conclusion: PASS				

4. Bandwidth

4.1.Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


4.2.Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


4.3.Test Result

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant 1	0.8135	0.7818	N/A	Pass
NVNT	1-DH1	2441	Ant 1	0.7891	0.7862	N/A	Pass
NVNT	1-DH1	2480	Ant 1	0.8067	0.7896	N/A	Pass
NVNT	2-DH1	2402	Ant 1	1.1581	1.1846	N/A	Pass
NVNT	2-DH1	2441	Ant 1	1.1215	1.18	N/A	Pass
NVNT	2-DH1	2480	Ant 1	1.1495	1.1834	N/A	Pass


OBW NVNT 1-DH1 2402MHz Ant1

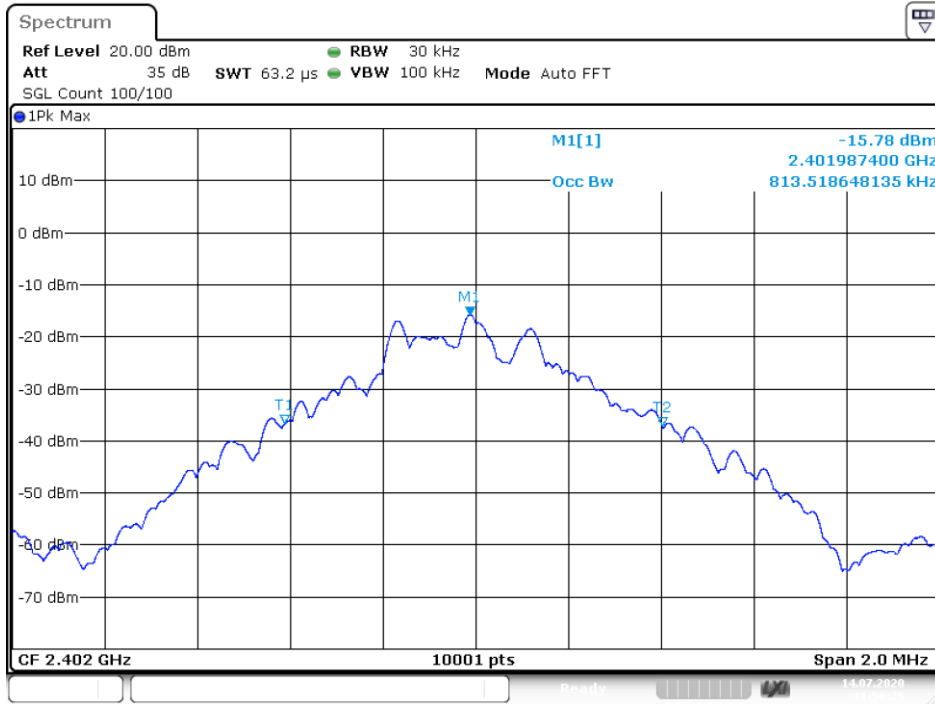


-20 dB BW NVNT 1-DH1 2402MHz Ant1

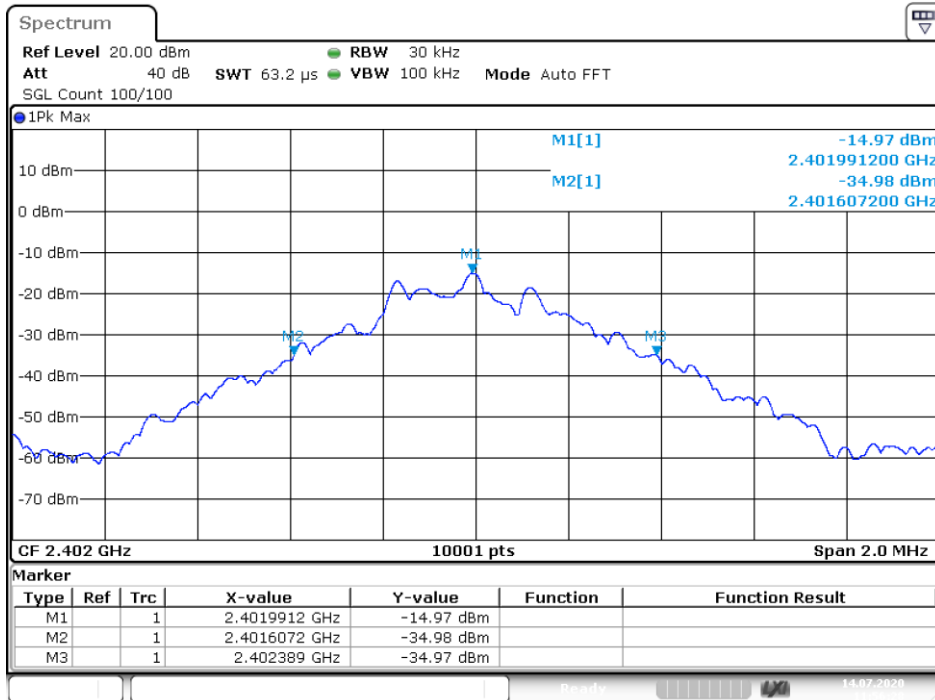


OBW NVNT 1-DH1 2441MHz Ant1

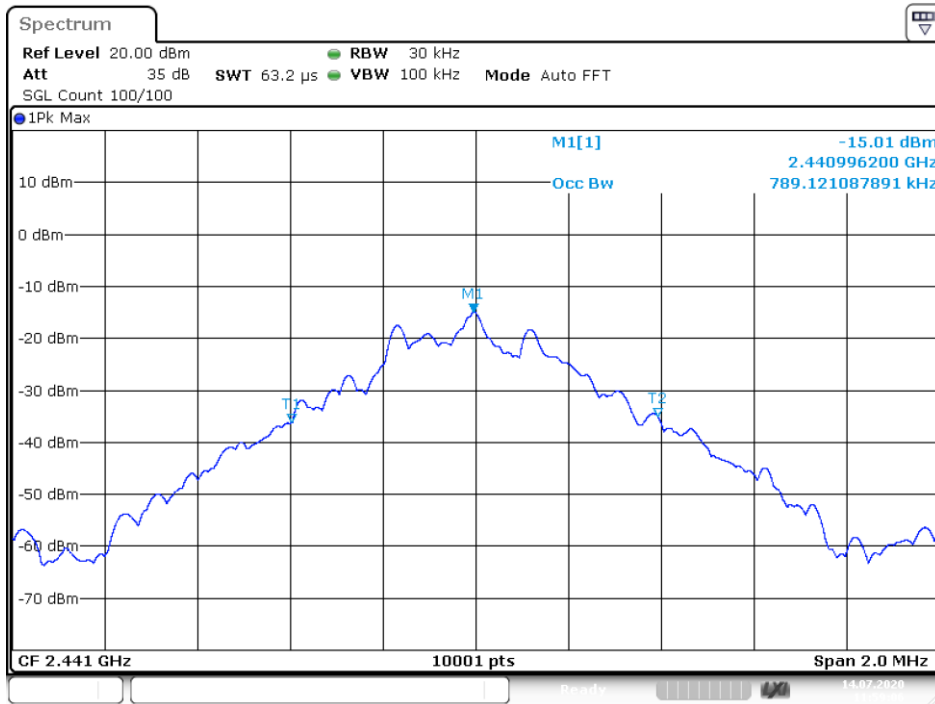

-20 dB BW NVNT 1-DH1 2441MHz Ant1

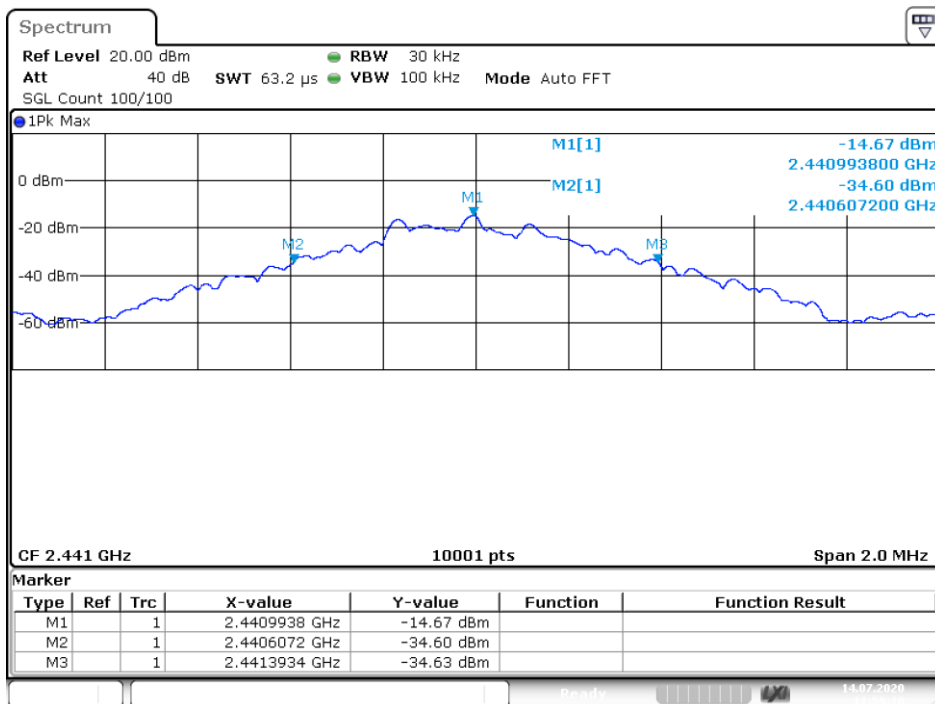


OBW NVNT 1-DH1 2480MHz Ant1

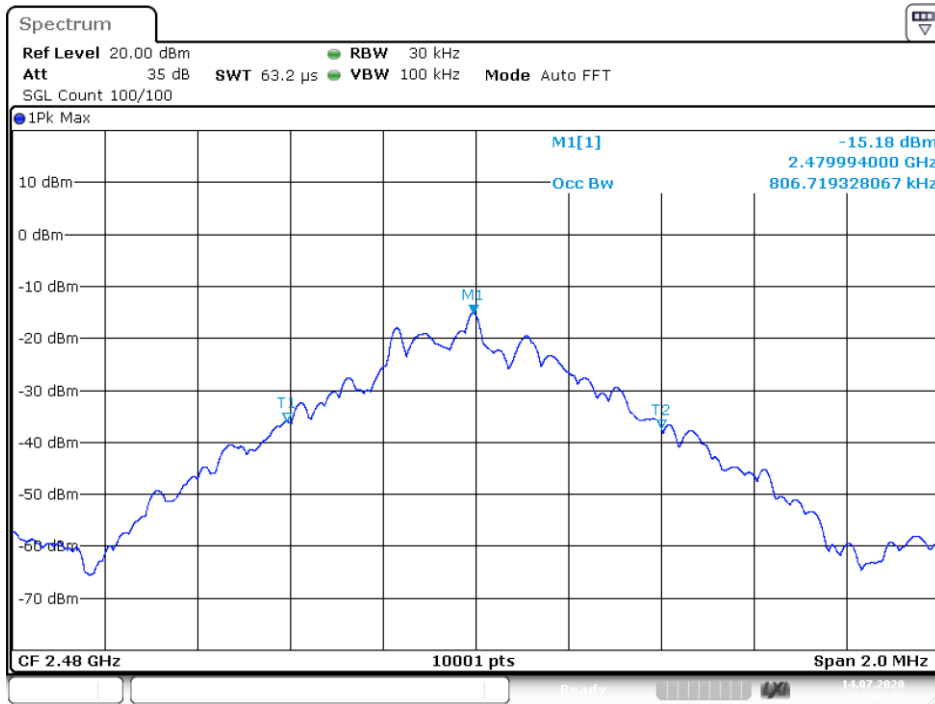


Date: 14.JUL.2020 12:00:05

-20 dB BW NVNT 1-DH1 2480MHz Ant1

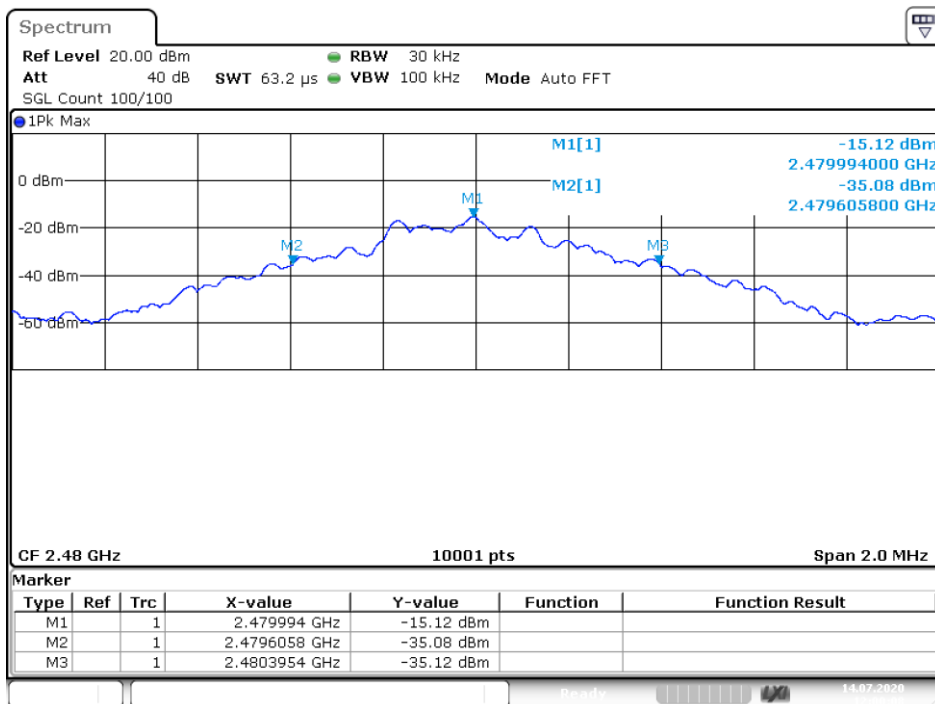


Date: 14.JUL.2020 12:00:08

OBW NVNT 2-DH1 2402MHz Ant1

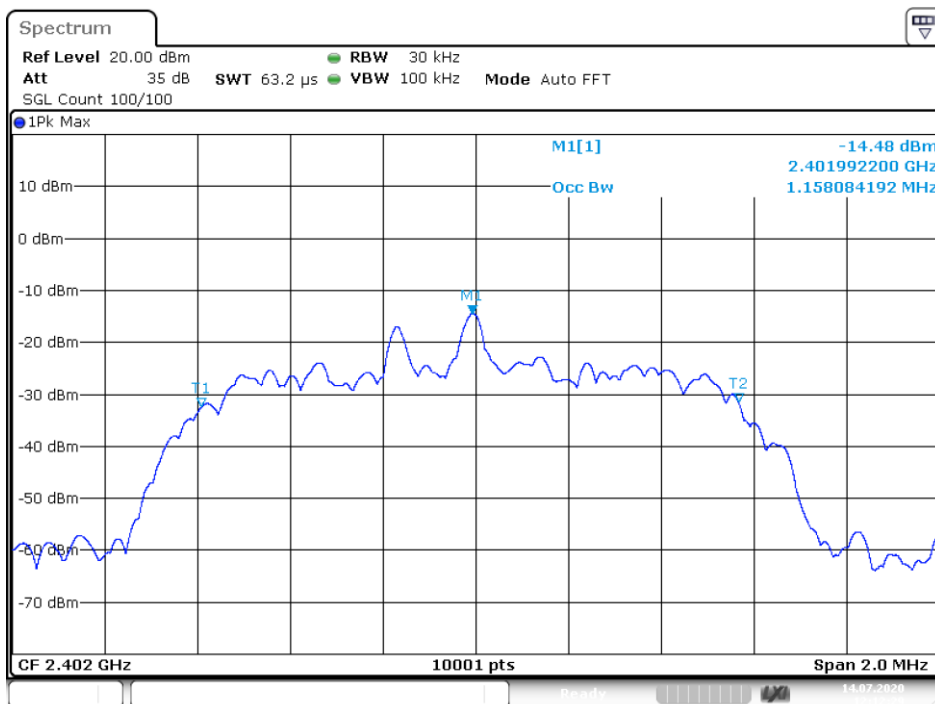


Date: 14.JUL.2020 12:12:28

-20 dB BW NVNT 2-DH1 2402MHz Ant1

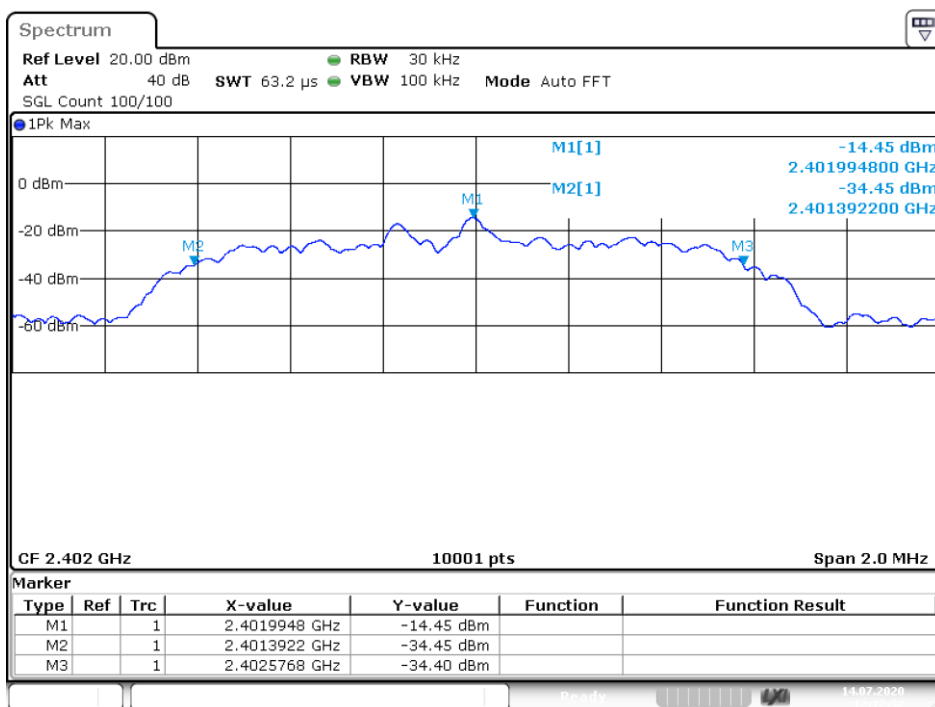


Date: 14.JUL.2020 12:12:31


OBW NVNT 2-DH1 2441MHz Ant1

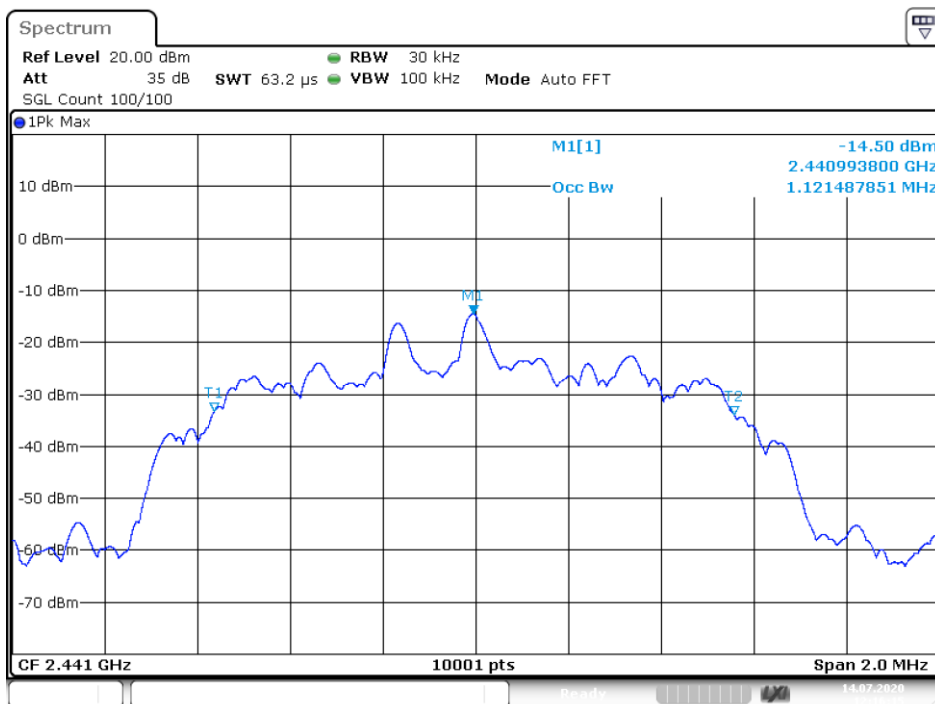

-20 dB BW NVNT 2-DH1 2441MHz Ant1

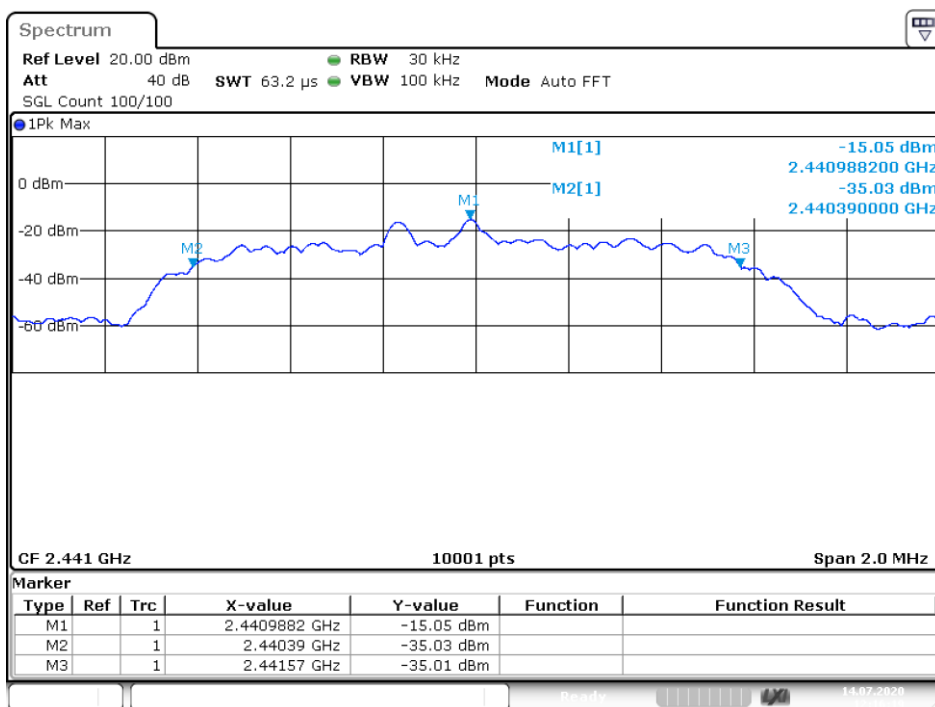


OBW NVNT 2-DH1 2480MHz Ant1

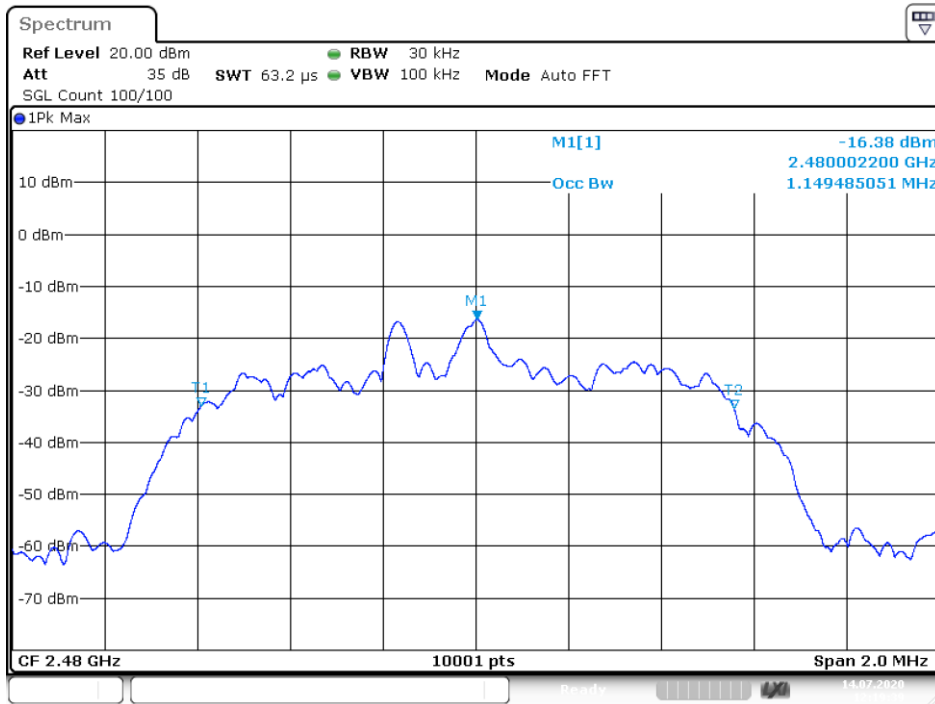

Date: 14.JUL.2020 12:19:39

-20 dB BW NVNT 2-DH1 2480MHz Ant1

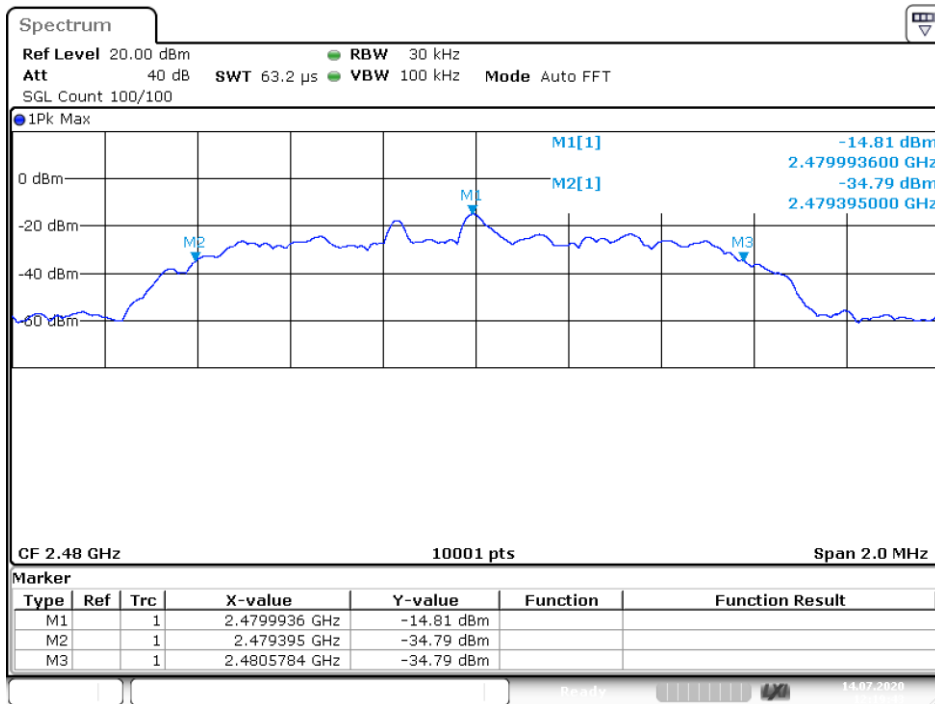

Date: 14.JUL.2020 12:19:43

5. Carrier Frequency Separation

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


5.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 20kHz RBW and 62kHz VBW.


5.3. Test Result

Condition	Mode	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH1	2440.854	2441.854	1	0.526	Pass
NVNT	2-DH1	2441.014	2442.014	1	0.789	Pass

CFS NVNT 1-DH1 2441MHz

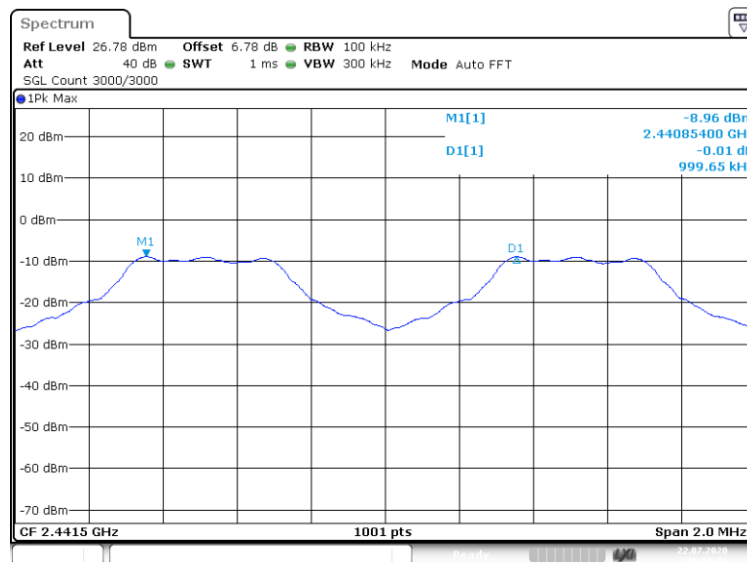

CFS NVNT 2-DH1 2441MHz

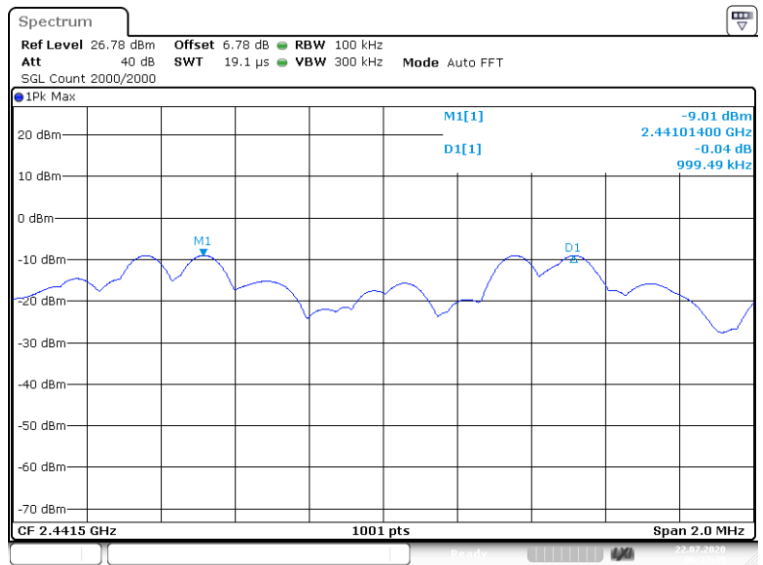

6. Number Of Hopping Channel

6.1.Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels


6.2.Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.

6.3.Test Result


Condition	Mode	Hopping Number	Limit	Verdict
NVNT	1-DH1	79	15	Pass
NVNT	2-DH1	79	15	Pass

Hopping No. NVNT 1-DH1 2441MHz

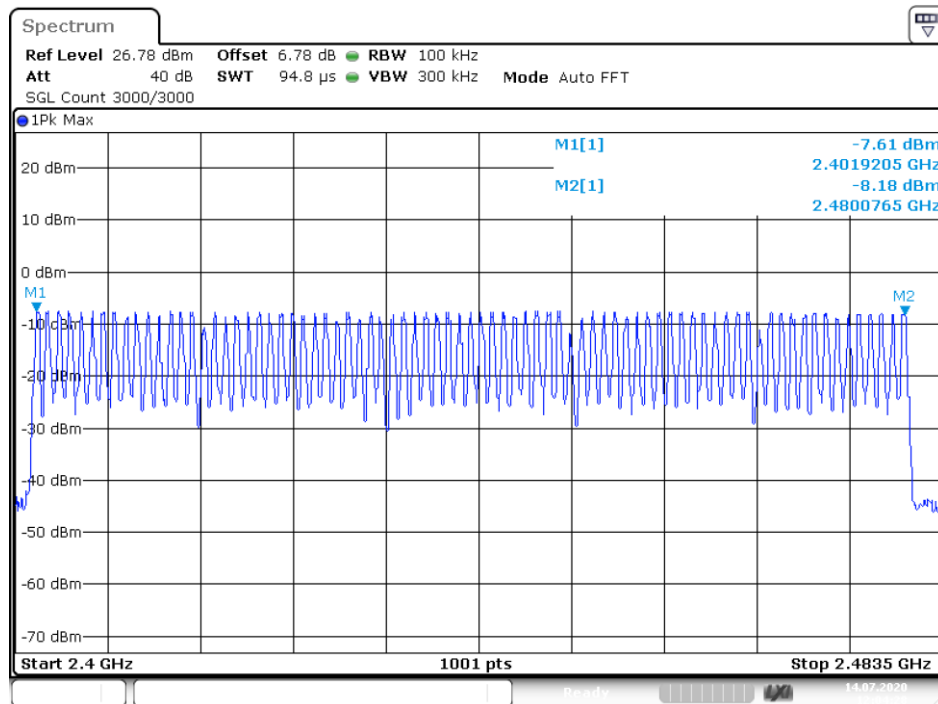

Date: 14.JUL.2020 12:04:28

Hopping No. NVNT 2-DH1 2441MHz

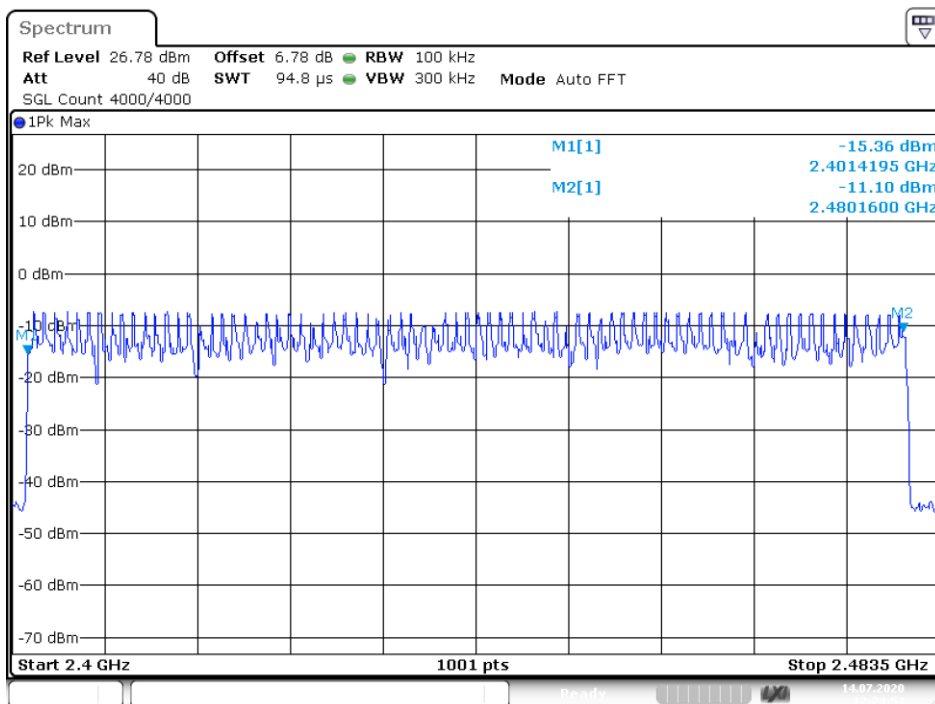

Date: 14.JUL.2020 12:24:54

7. Dwell Time

7.1. Test limit

Please refer section 15.247

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channels employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW=1MHz, VBW=1MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequencies measured were complete.

7.3. Test Result

PASS.

Condition	Mode	Frequency (MHz)	Pulse Time (ms)	Total Dwell Time (ms)	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2402	0.421	134.72	31600	400	Pass
NVNT	1-DH1	2441	0.421	134.72	31600	400	Pass
NVNT	1-DH1	2480	0.421	134.72	31600	400	Pass
NVNT	1-DH3	2441	1.677	268.32	31600	400	Pass
NVNT	1-DH5	2441	2.925	312.00	31600	400	Pass
NVNT	2-DH1	2402	0.431	137.92	31600	400	Pass
NVNT	2-DH1	2441	0.431	137.92	31600	400	Pass
NVNT	2-DH1	2460	0.431	137.92	31600	400	Pass
NVNT	2-DH3	2441	1.683	269.28	31600	400	Pass
NVNT	2-DH5	2441	2.931	312.64	31600	400	Pass


Note: 1 A period time = 0.4 (s) * 79 = 31.6(s)

2 DH1 Dwell Time = Pulse Time * (1600/(2*79)) * A period time

DH3 Dwell Time = Pulse Time * (1600/(4*79)) * A period time


DH5 Dwell Time = Pulse Time * (1600/(6*79)) * A period time

Dwell NVNT 1-DH1 2402MHz

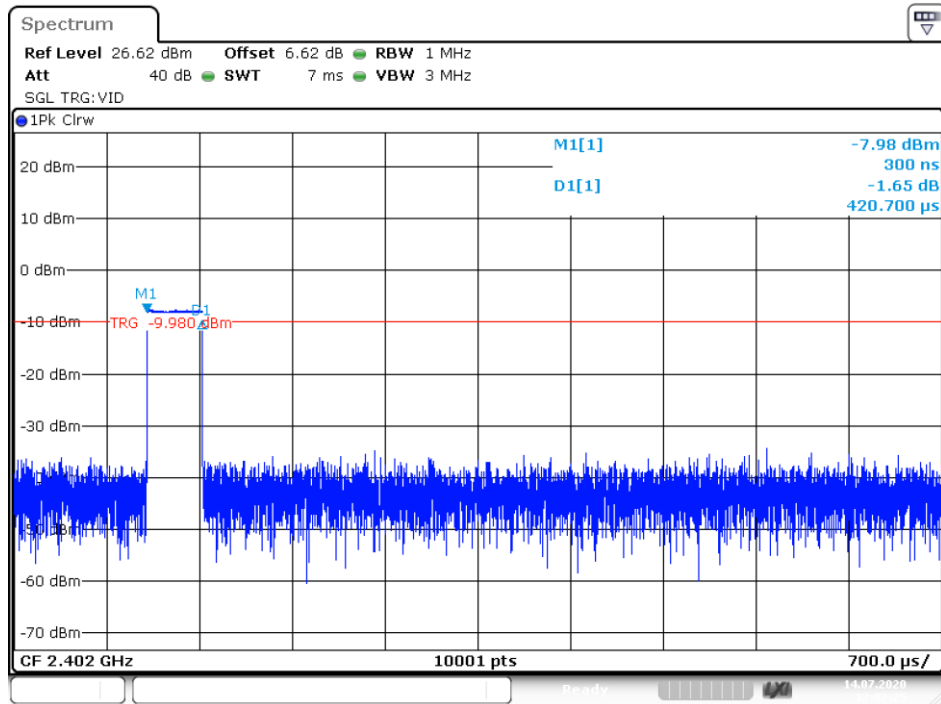


Date: 14.JUL.2020 12:02:25

Dwell NVNT 1-DH1 2441MHz

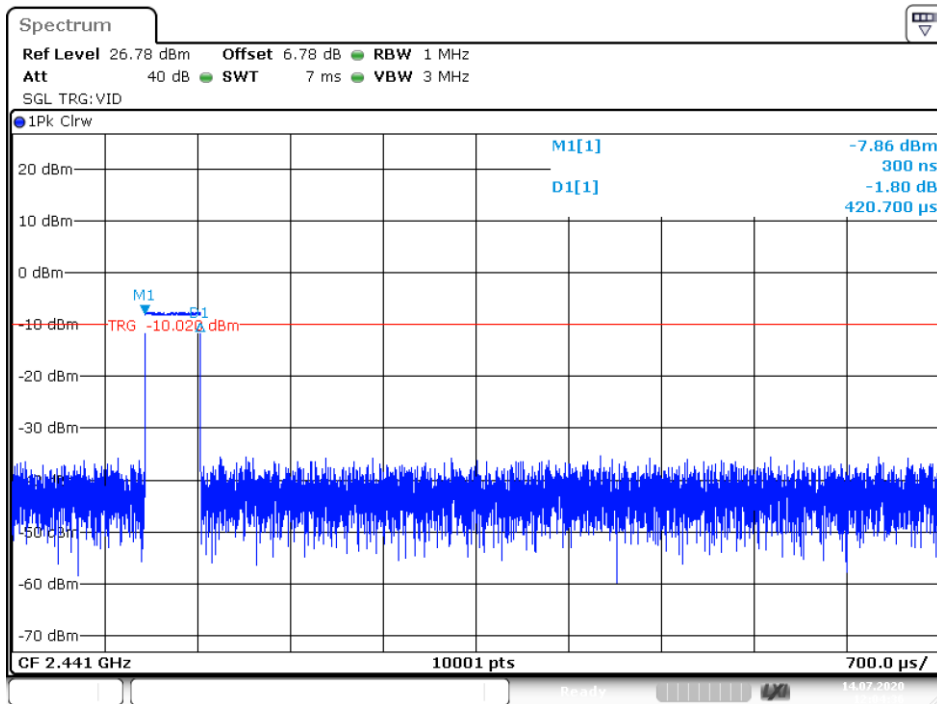


Date: 14.JUL.2020 12:04:37

Dwell NVNT 1-DH1 2480MHz

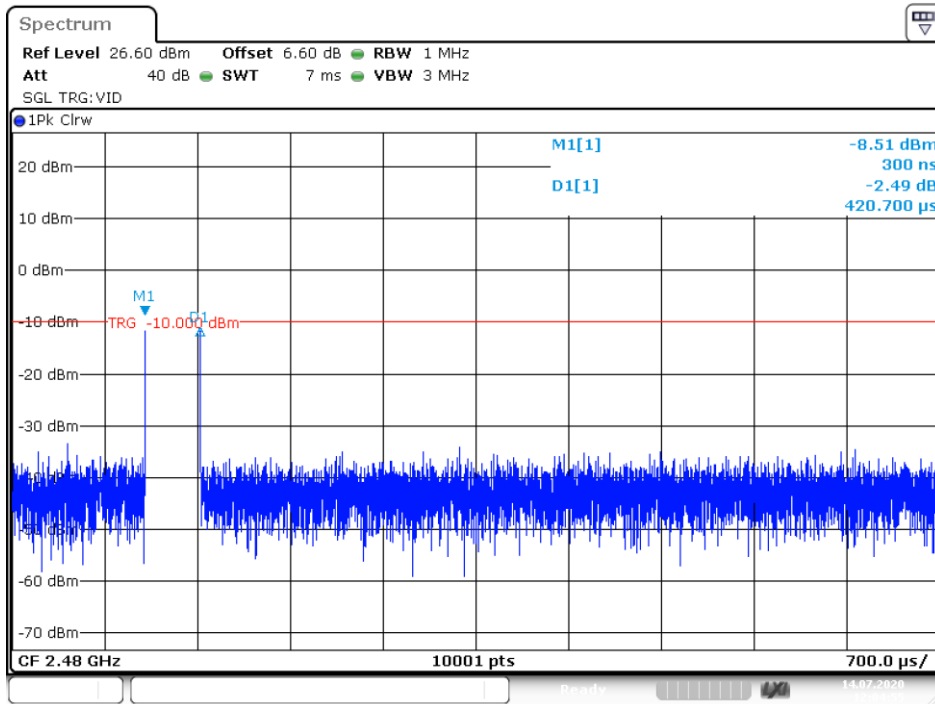


Date: 14.JUL.2020 12:04:56

Dwell NVNT 1-DH3 2441MHz

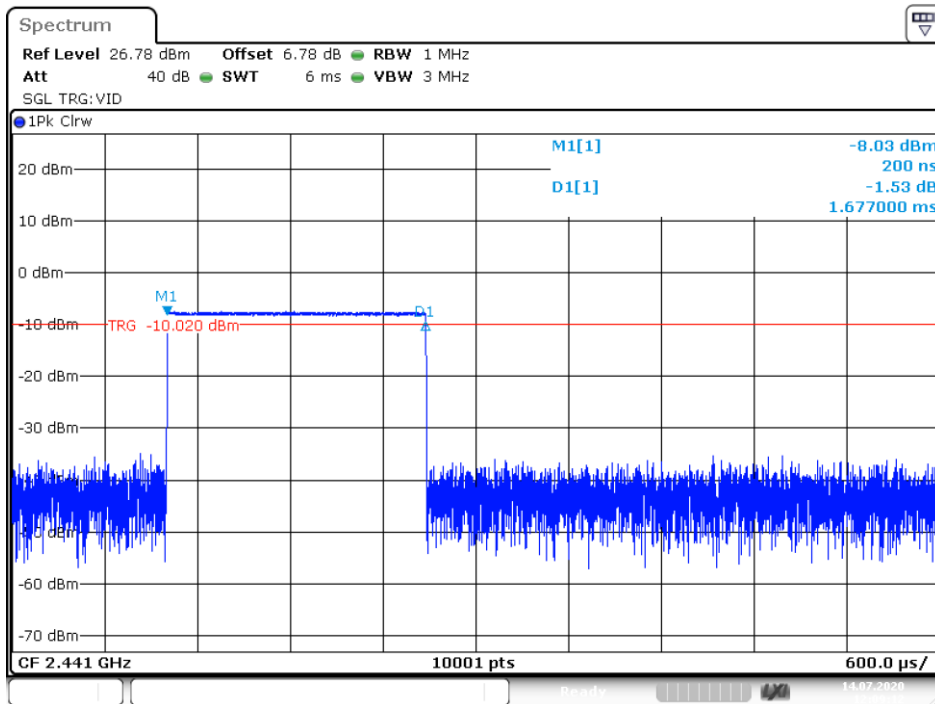


Date: 14.JUL.2020 12:09:11

Dwell NVNT 1-DH5 2441MHz

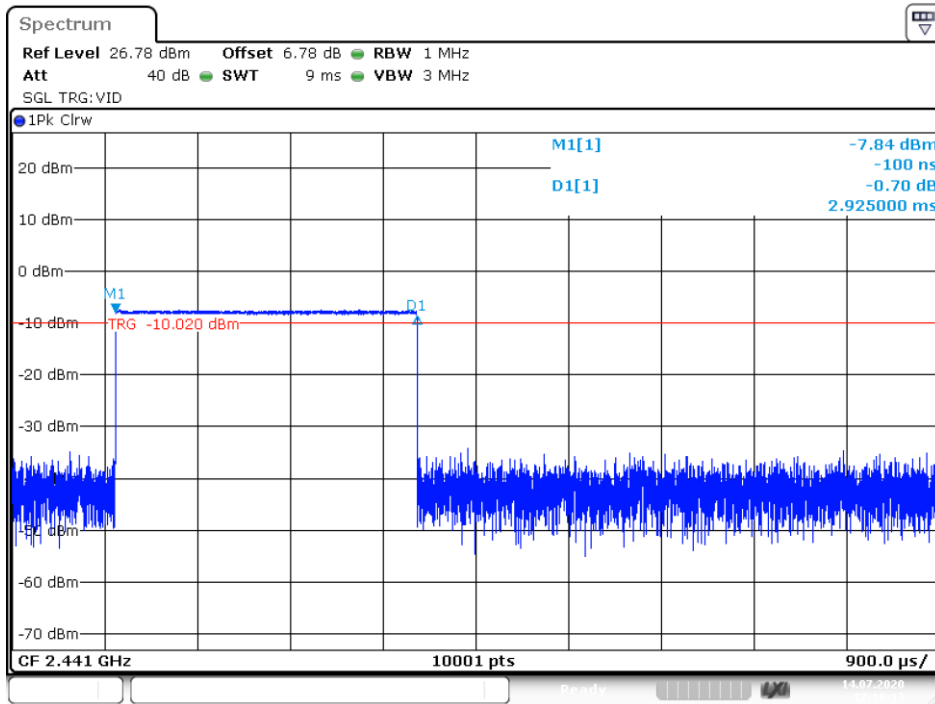


Date: 14.JUL.2020 12:10:12

Dwell NVNT 2-DH1 2402MHz

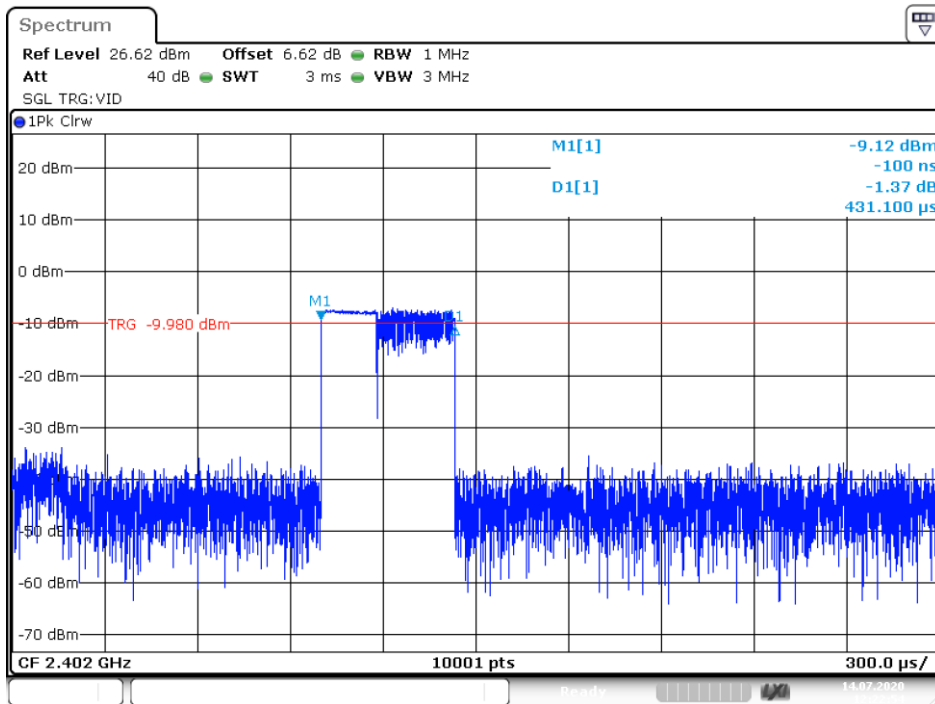


Date: 14.JUL.2020 12:22:54

Dwell NVNT 2-DH1 2441MHz

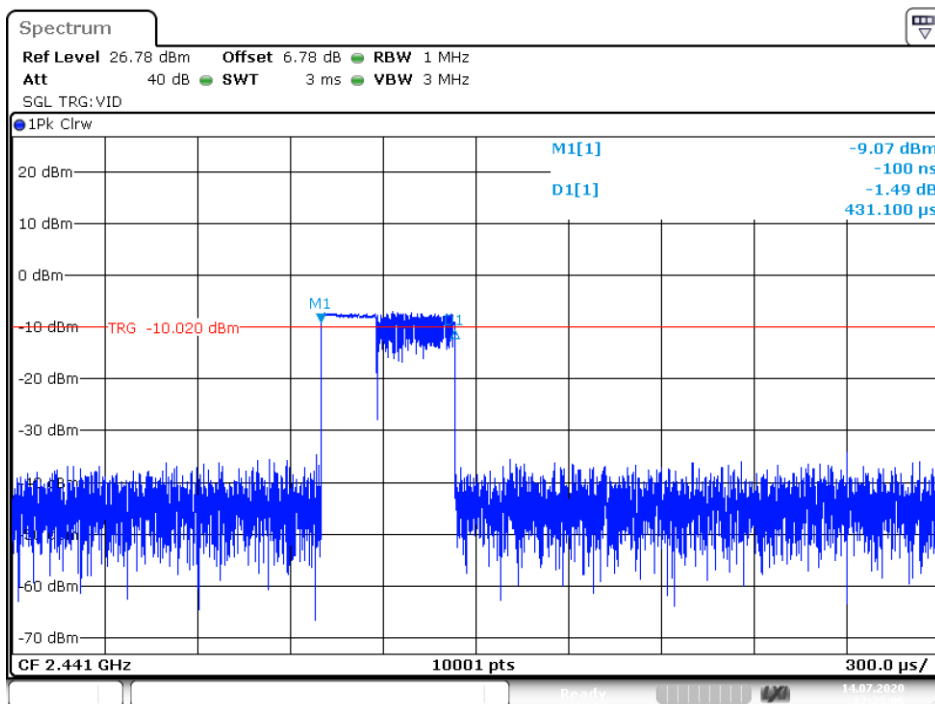


Date: 14.JUL.2020 12:25:07

Dwell NVNT 2-DH1 2460MHz

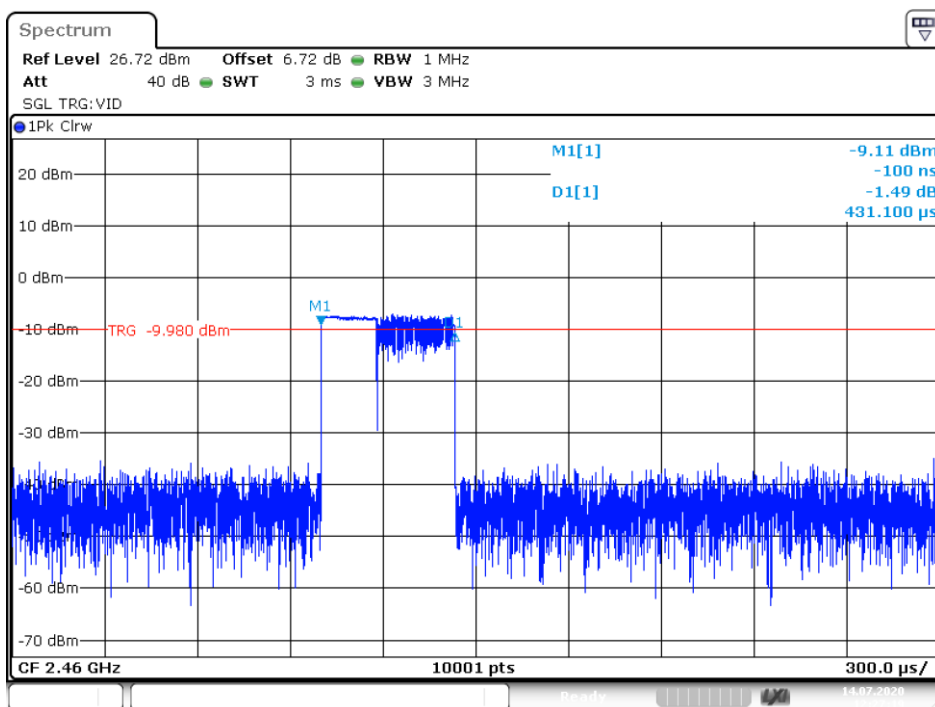


Date: 14.JUL.2020 12:27:19

Dwell NVNT 2-DH3 2441MHz

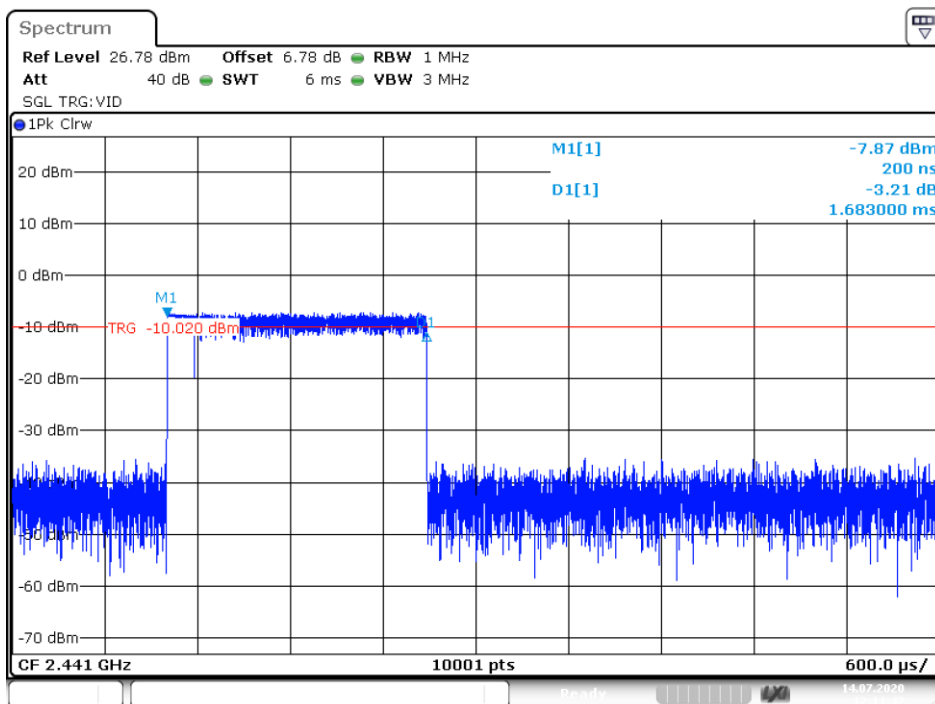

Dwell NVNT 2-DH5 2441MHz

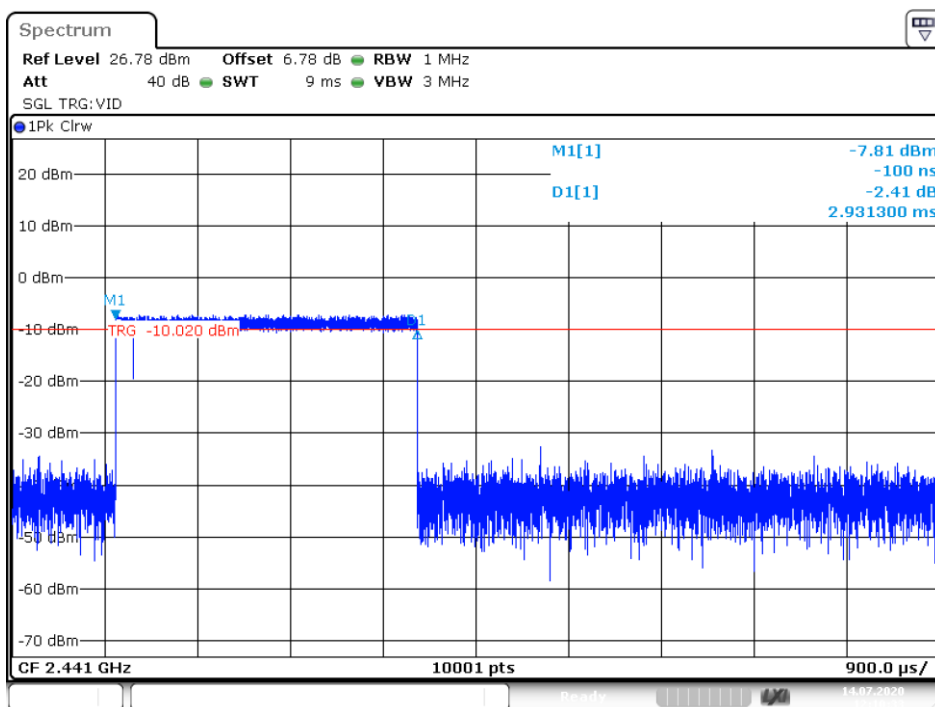

8. Radiated Emissions

8.1.Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit


FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

8.2. Block Diagram of Test setup


8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

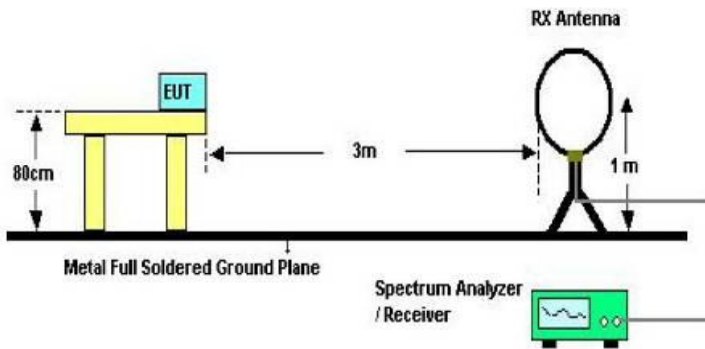

8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

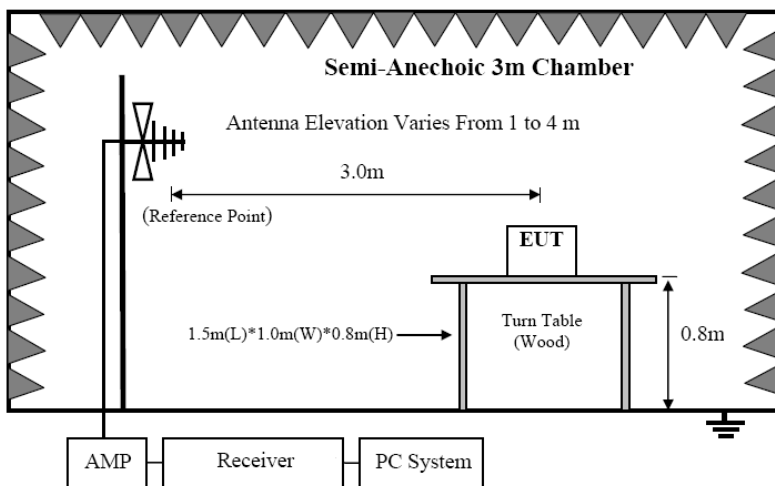

8.2.2 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

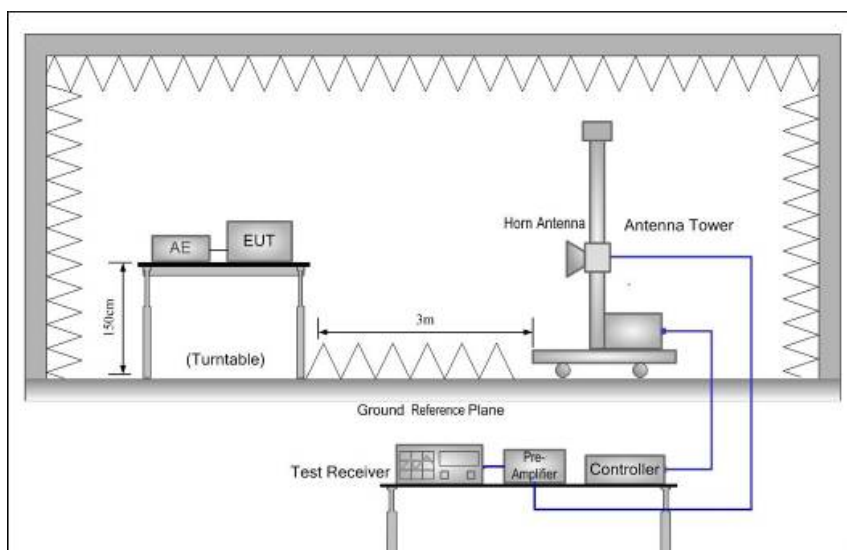

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator as shown in section 1.4 and 6.1
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

8.4. Test Result


We have scanned the 10th harmonic from 9KHz to the EUT's highest frequency.. Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


From 30MHz to 1000MHz: Conclusion: PASS

Pol Vertical

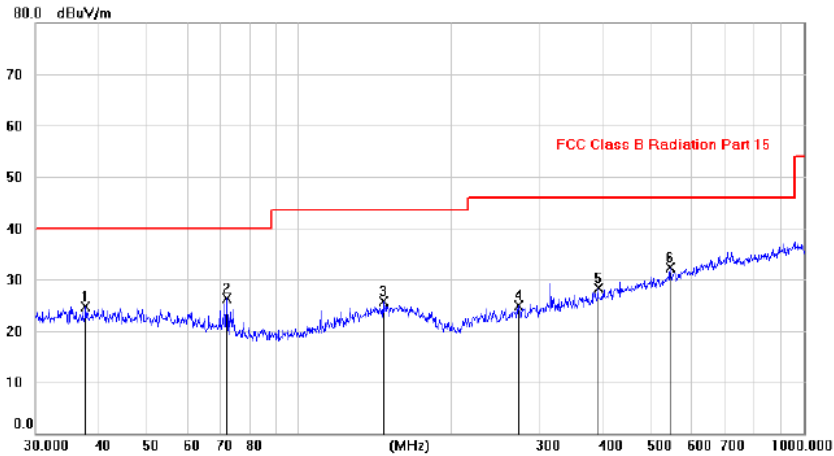

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		37.7856	10.01	14.70	24.71	40.00	-15.29	peak	
2	*	71.9075	14.61	11.77	26.38	40.00	-13.62	peak	
3		146.7332	9.99	15.79	25.78	43.50	-17.72	peak	
4		272.2776	10.42	14.51	24.93	46.00	-21.07	peak	
5		391.4082	11.08	17.29	28.37	46.00	-17.63	peak	
6		543.4648	11.91	20.43	32.34	46.00	-13.66	peak	

Pol Horizontal

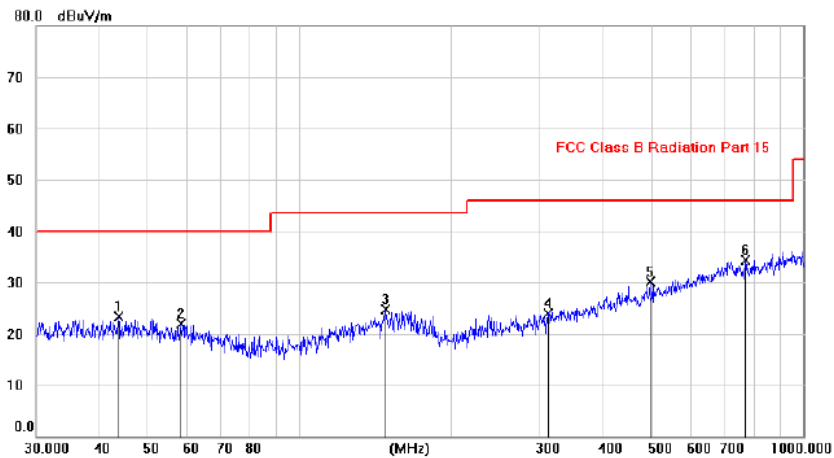

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		43.7505	8.48	14.79	23.27	40.00	-16.73	peak	
2		58.3051	7.82	14.03	21.85	40.00	-18.15	peak	
3		148.3890	8.76	15.90	24.66	43.50	-18.84	peak	
4		311.1958	8.48	15.52	24.00	46.00	-22.00	peak	
5		495.9344	10.68	19.51	30.19	46.00	-15.81	peak	
6	*	769.8272	10.26	24.05	34.31	46.00	-11.69	peak	

*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Remark: All modes have been tested, and only worst data of (GFSK) was listed in this report.


From 1G-25GHz

Test Mode: GFSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	45.54	V	33.95	10.18	34.26	55.41	74	18.59	PK
4804	38.78	V	33.95	10.18	34.26	48.65	54	5.35	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4824	44.26	H	33.95	10.18	34.26	54.13	74	19.87	PK
4824	37.24	H	33.95	10.18	34.26	47.11	54	6.89	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX Mid									
4882	42.21	V	33.93	10.2	34.29	52.05	74	21.95	PK
4882	35.77	V	33.93	10.2	34.29	45.61	54	8.39	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	42.71	H	33.93	10.2	34.29	52.55	74	21.45	PK
4882	35.55	H	33.93	10.2	34.29	45.39	54	8.61	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX High									
4960	46.03	V	33.98	10.22	34.25	55.98	74	18.02	PK
4960	34.64	V	33.98	10.22	34.25	44.59	54	9.41	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	42.22	H	33.98	10.22	34.25	52.17	74	21.83	PK
4960	31.54	H	33.98	10.22	34.25	41.49	54	12.51	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

Remark: All modes have been tested, and only worst data of (GFSK) was listed in this report.

9. Band Edge Compliance

9.1. Block Diagram of Test Setup

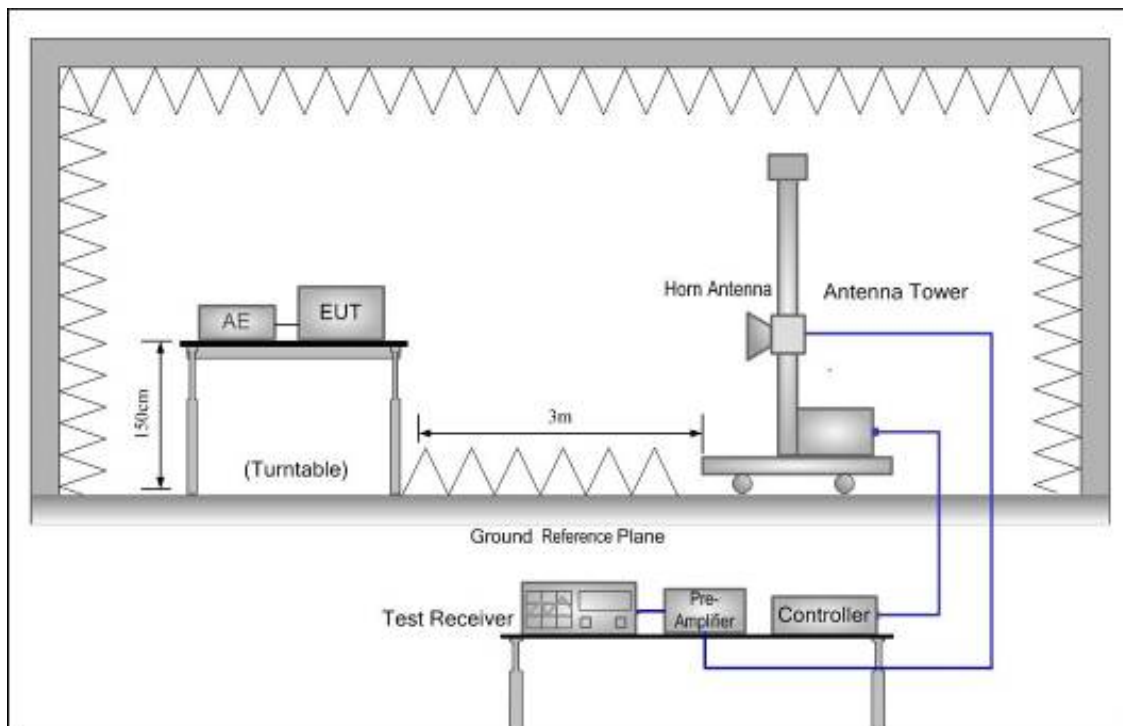

9.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

9.3. Test Procedure

All restriction band and non- restriction band have been tested, only worse case is reported.

9.4. Test Result

PASS. (See below detailed test data)


Radiated Method:

Hopping-off

Polarization: Vertical


Test Mode:

GFSK-Low

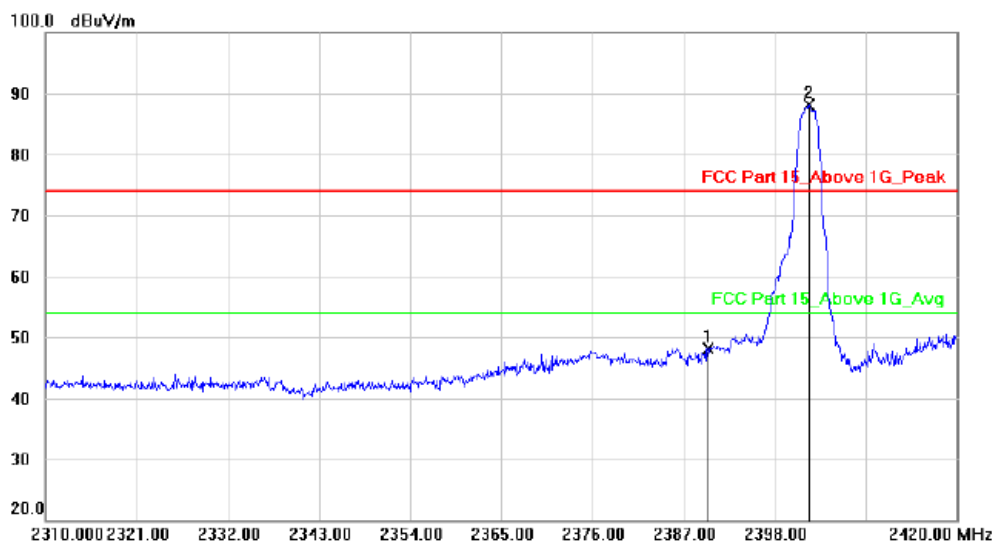

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	51.51	-3.40	48.11	74.00	-25.89			peak
2	*	2402.180	91.51	-3.41	88.10	74.00	14.10			peak

Polarization: Horizontal

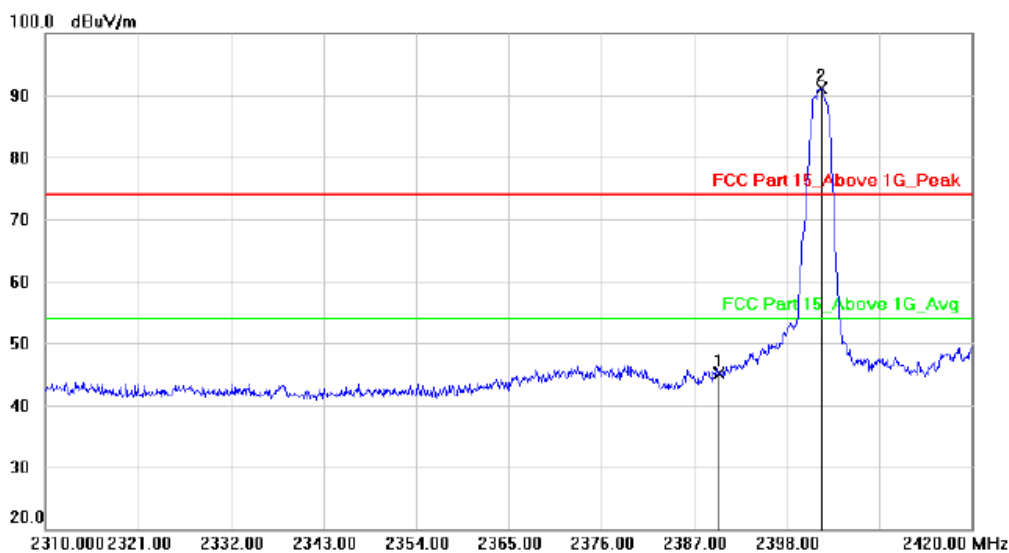


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	48.45	-3.40	45.05	74.00	-28.95			peak
2	*	2402.180	94.43	-3.41	91.02	74.00	17.02			peak

Hopping-on


Polarization: Vertical

Test Mode: GFSK-Low

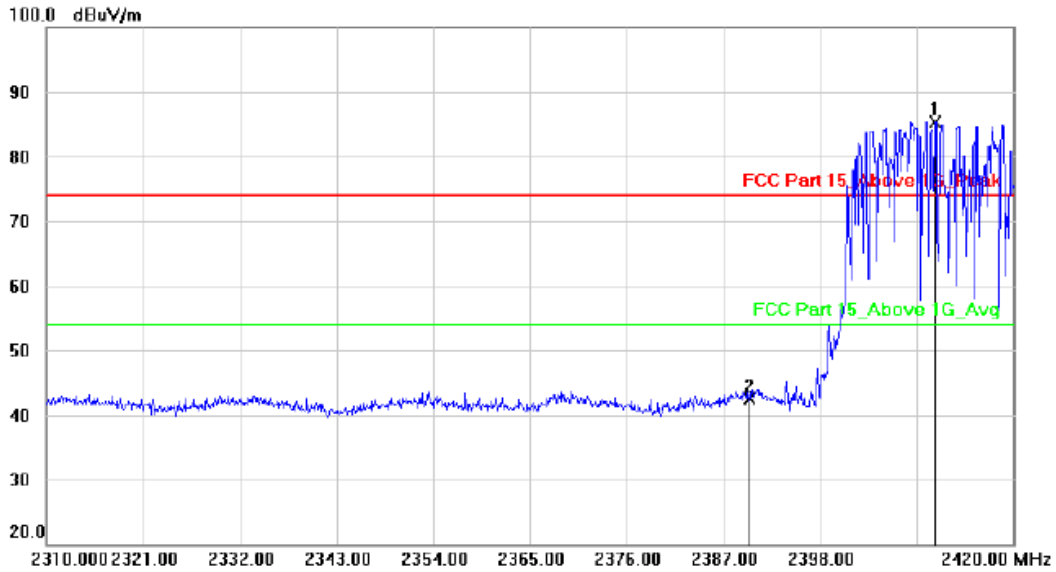

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2411.090	88.74	-3.40	85.34	74.00	11.34			peak
2		2390.000	45.97	-3.40	42.57	74.00	-31.43			peak

Polarization: Horizontal

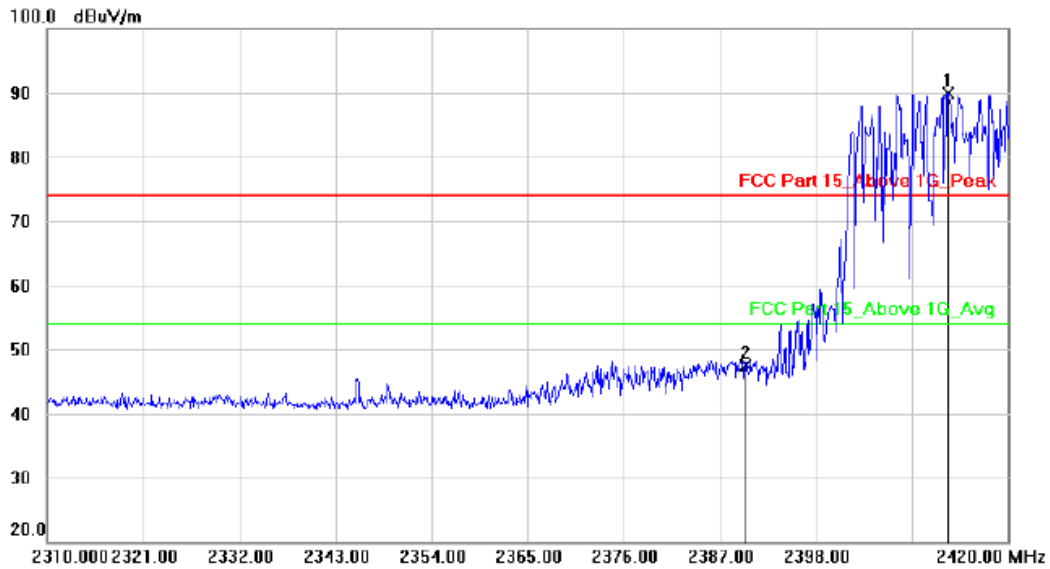


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2413.180	93.32	-3.41	89.91	74.00	15.91			peak
2		2390.000	50.96	-3.40	47.56	74.00	-26.44			peak

Hopping-off


Polarization: Vertical

Test Mode: GFSK-High

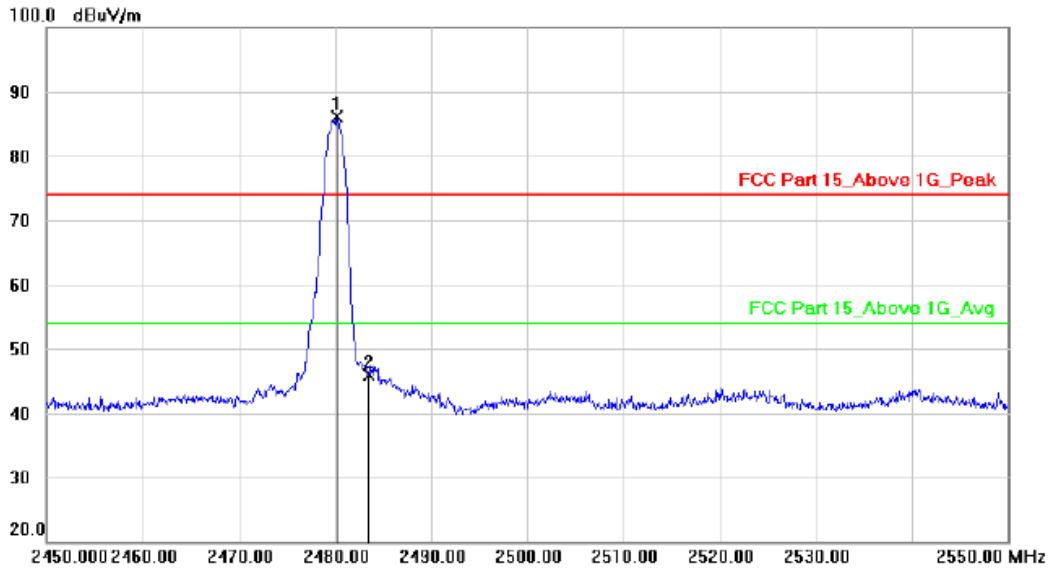

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	2480.200	89.40	-3.38	86.02	74.00	12.02		peak
2		2483.500	49.36	-3.38	45.98	74.00	-28.02		peak

Polarization: Horizontal

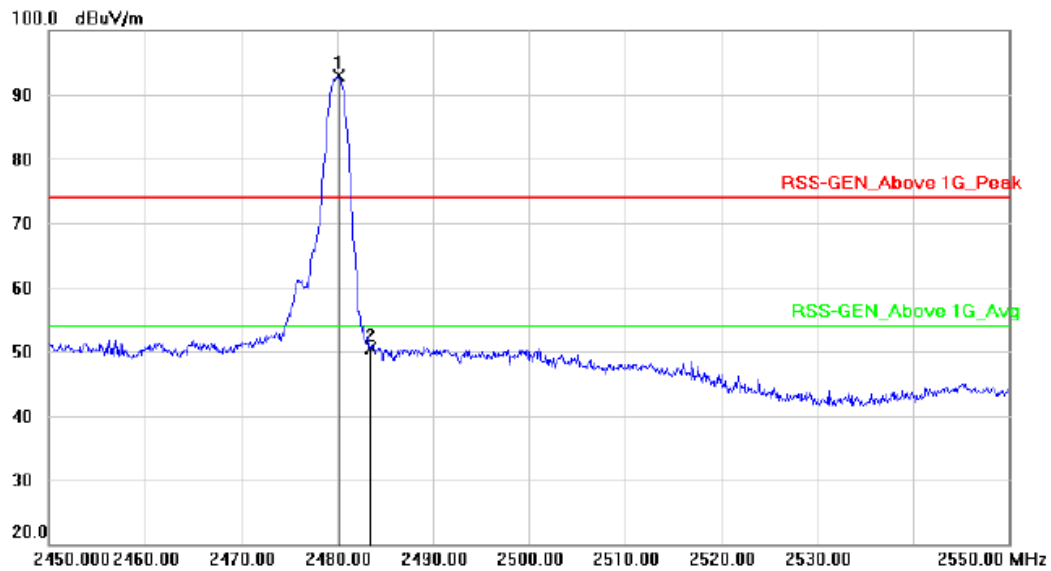


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	2480.200	96.25	-3.38	92.87	74.00	18.87		peak
2		2483.500	53.82	-3.38	50.44	74.00	-23.56		peak

Hopping-on


Polarization: Vertical

Test Mode: GFSK-High

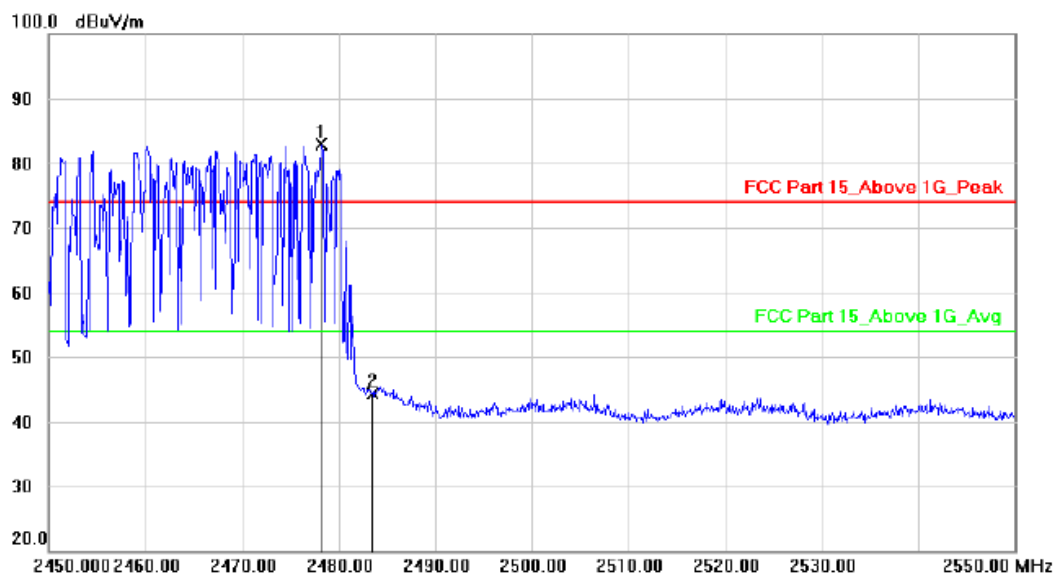

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2478.200	86.22	-3.39	82.83	74.00	8.83			peak
2		2483.500	47.76	-3.38	44.38	74.00	-29.62			peak

Polarization: Horizontal

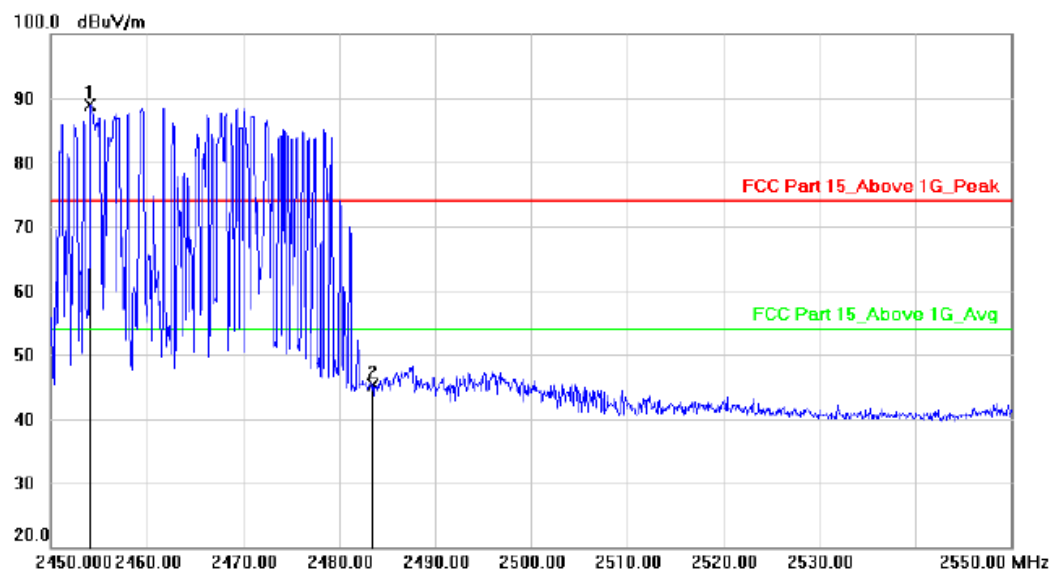


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2454.100	92.28	-3.39	88.89	74.00	14.89			peak
2		2483.500	48.67	-3.38	45.29	74.00	-28.71			peak

hopping-on

Hopping-off


Polarization: Vertical

Test Mode: π /4-DQPSK-Low

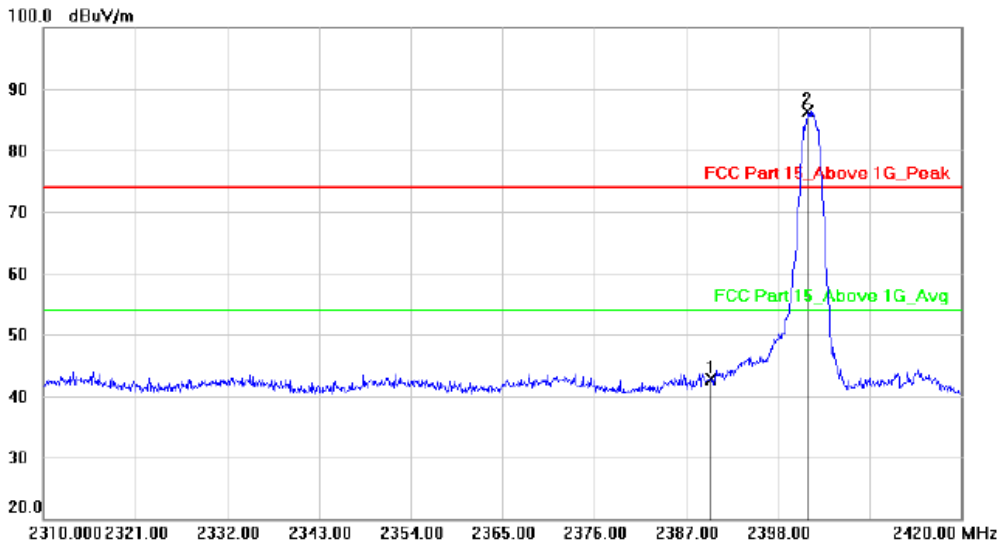

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	46.11	-3.40	42.71	74.00	-31.29			peak
2	*	2401.630	89.74	-3.41	86.33	74.00	12.33			peak

Polarization: Horizontal

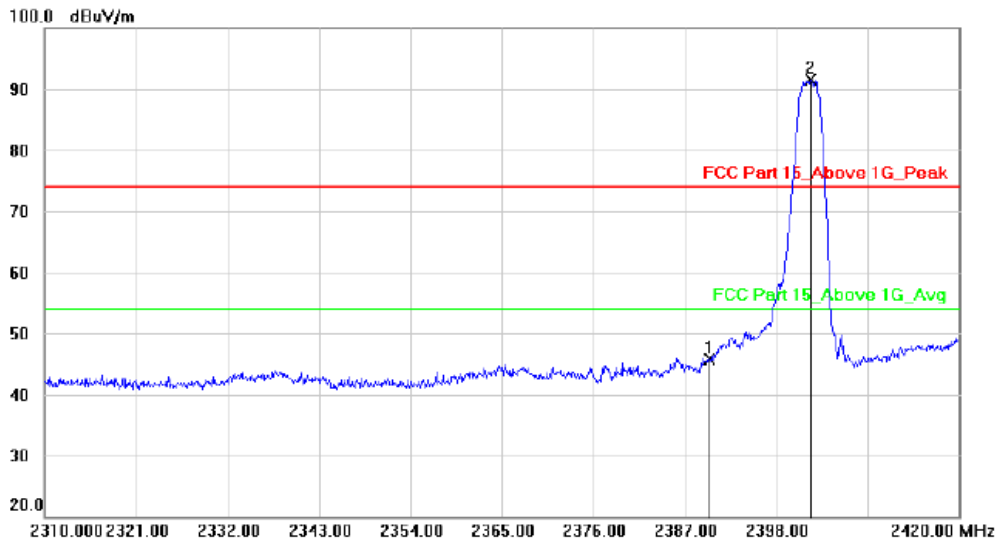


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	49.18	-3.40	45.78	74.00	-28.22			peak
2	*	2402.180	94.92	-3.41	91.51	74.00	17.51			peak

Hopping-on


Polarization: Vertical

Test Mode: π /4-DQPSK-Low

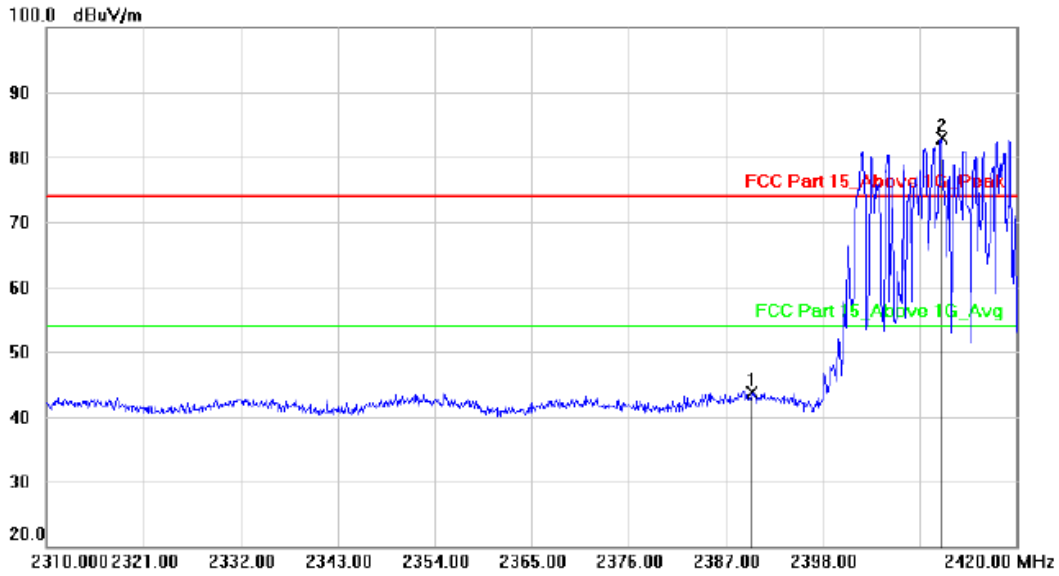

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1		2390.000	47.07	-3.40	43.67	74.00	-30.33			peak
2	*	2411.530	86.29	-3.40	82.89	74.00	8.89			peak

Polarization: Horizontal

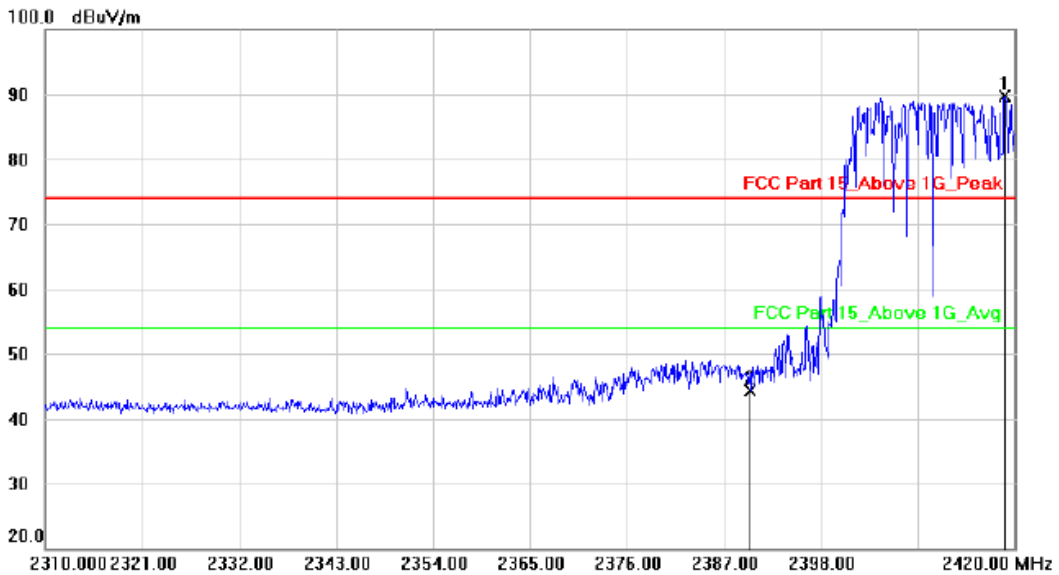


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1	*	2418.900	93.09	-3.41	89.68	74.00	15.68			peak
2		2390.000	47.79	-3.40	44.39	74.00	-29.61			peak

Hopping-off


Polarization: Vertical

Test Mode: $\pi/4$ -DQPSK-High

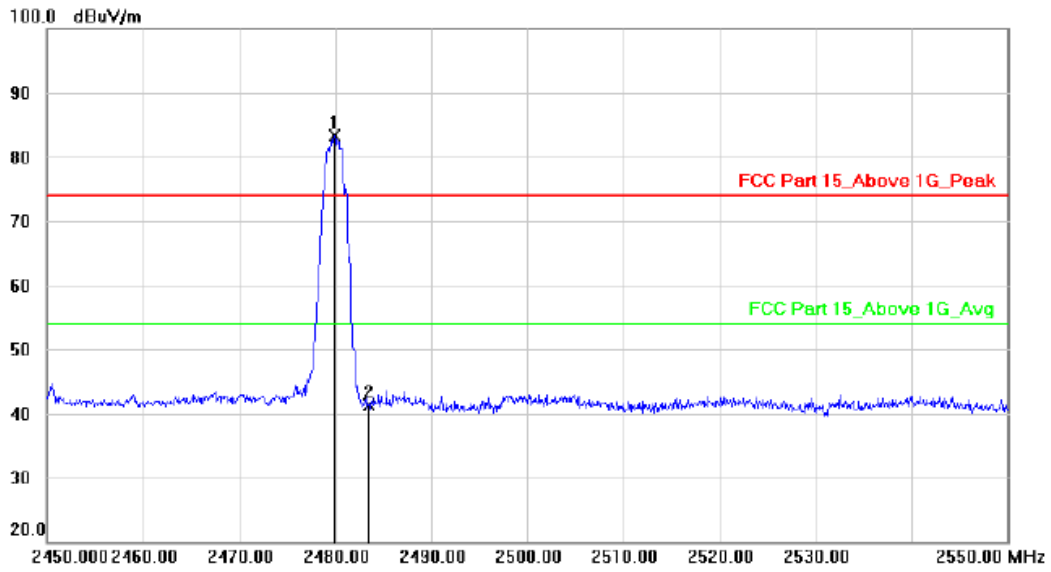

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2479.900	86.69	-3.38	83.31	74.00	9.31			peak
2		2483.500	44.71	-3.38	41.33	74.00	-32.67			peak

Polarization: Horizontal

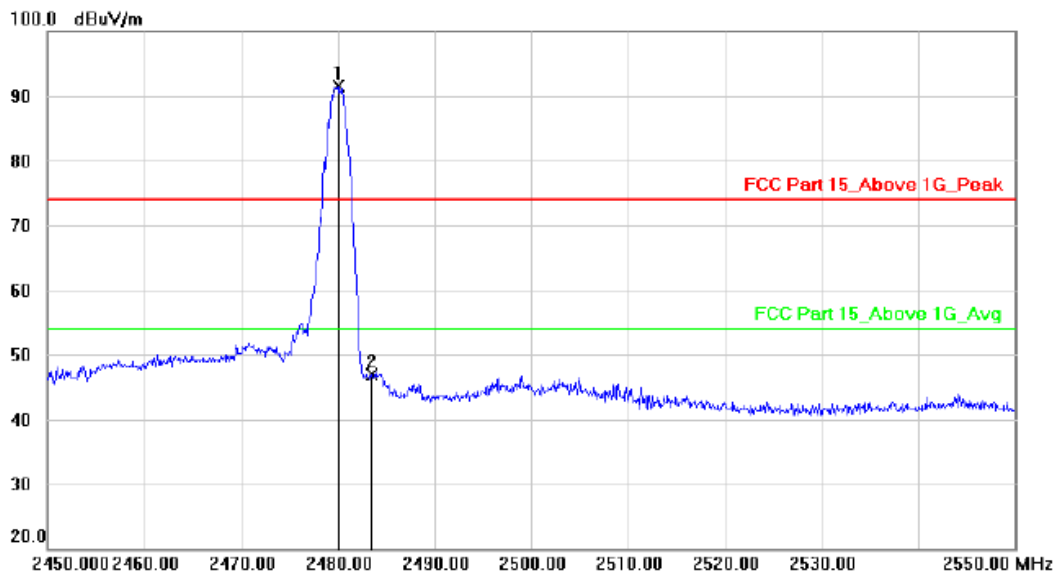


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2480.000	94.82	-3.38	91.44	74.00	17.44			peak
2		2483.500	50.36	-3.38	46.98	74.00	-27.02			peak

Hopping-on

Polarization: Vertical


Test Mode: $\pi/4$ -DQPSK-High

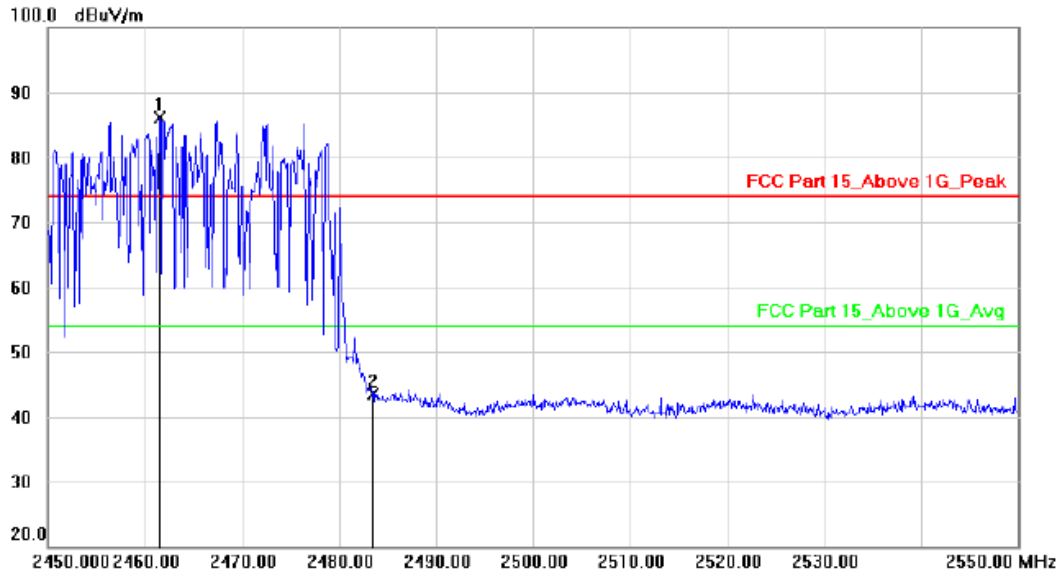

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	2461.500	89.48	-3.39	86.09	74.00	12.09	peak	
2		2483.500	46.92	-3.38	43.54	74.00	-30.46	peak	

Polarization: Horizontal

Test Mode:

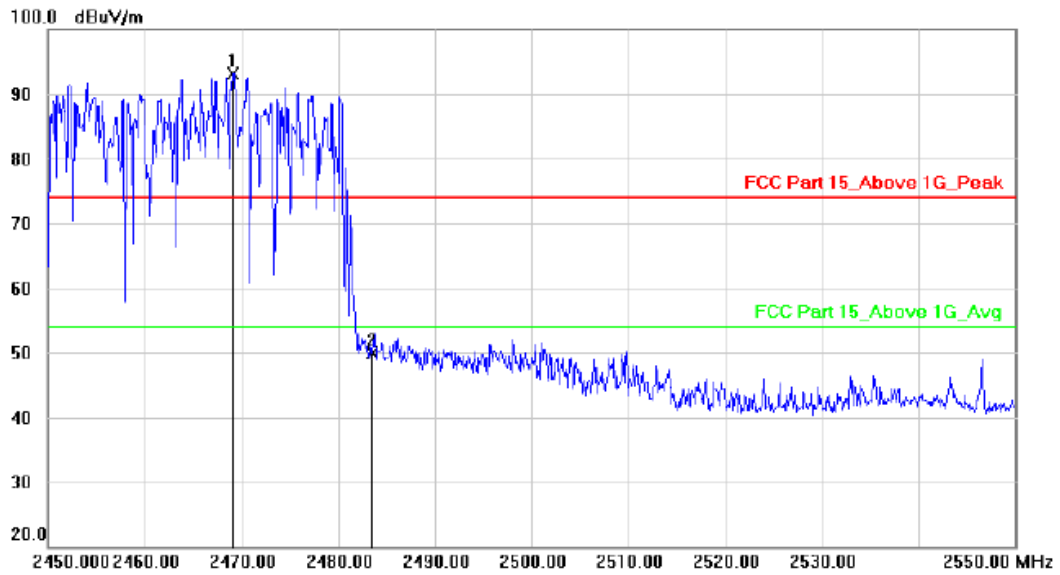


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	2469.100	96.45	-3.39	93.06	74.00	19.06	peak	
2		2483.500	53.24	-3.38	49.86	74.00	-24.14	peak	

hopping-on


Conducted Method

Band Edge NVNT 1-DH1 2402MHz Ant1 Hopping Ref

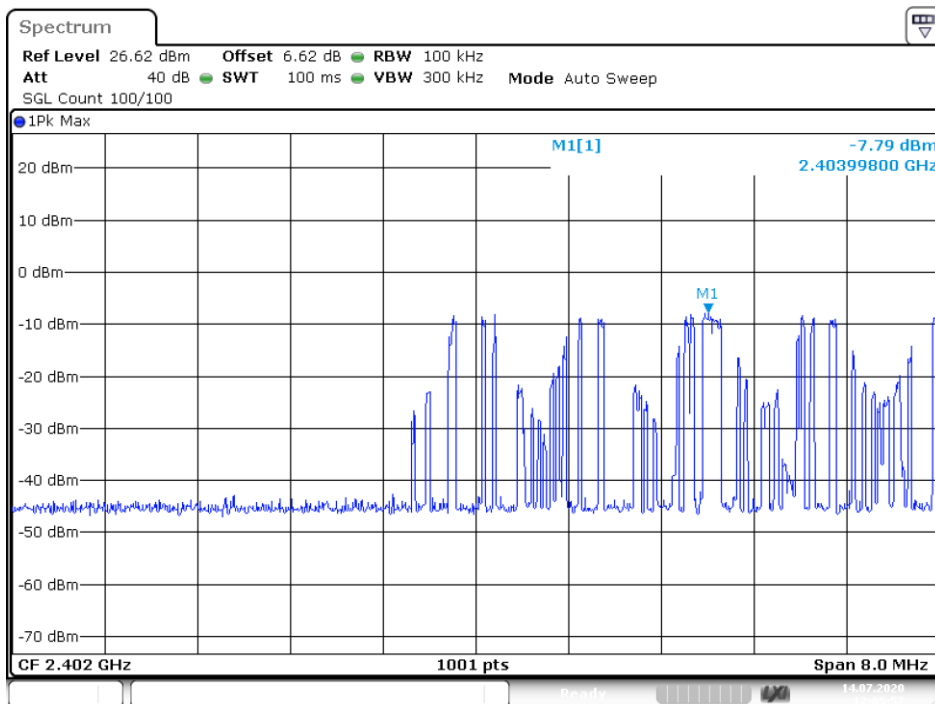


Date: 14.JUL.2020 12:05:57

Band Edge NVNT 1-DH1 2402MHz Ant1 Hopping Emission

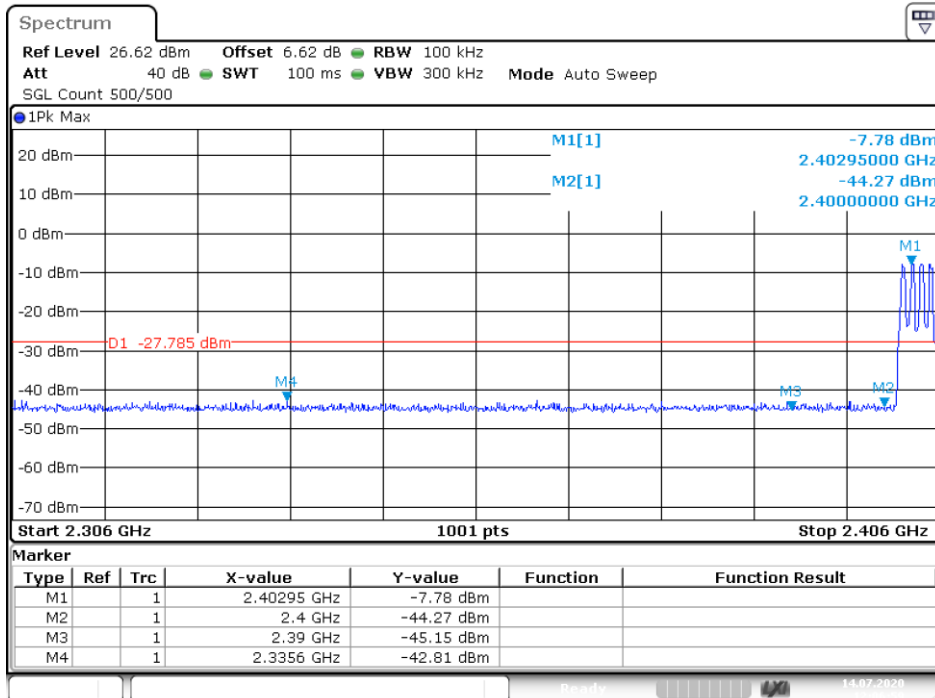


Date: 14.JUL.2020 12:06:59

Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Ref

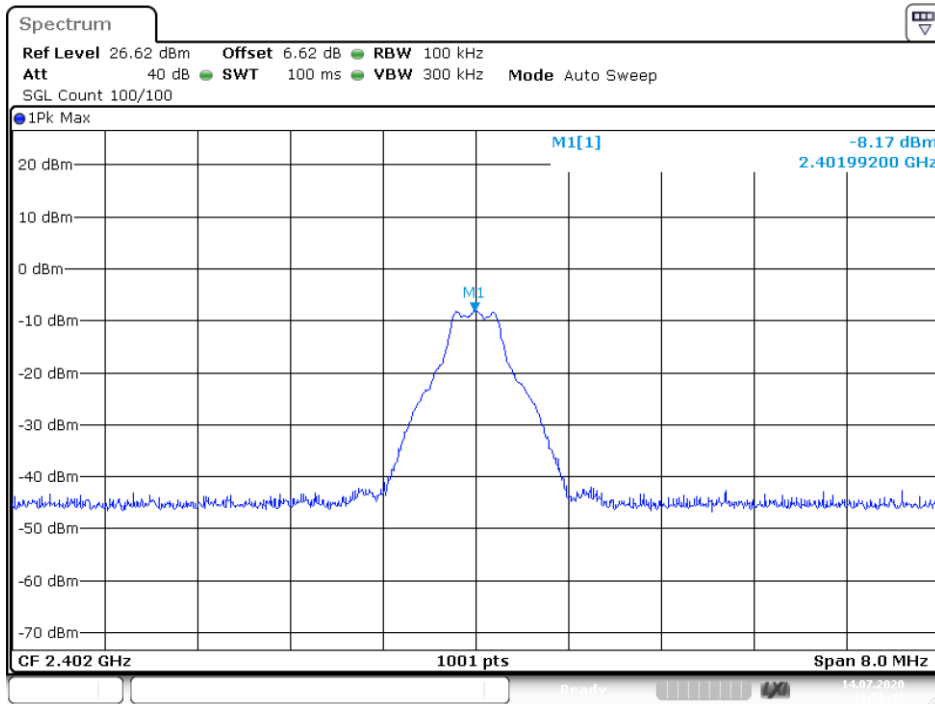


Date: 14.JUL.2020 11:56:44

Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Emission

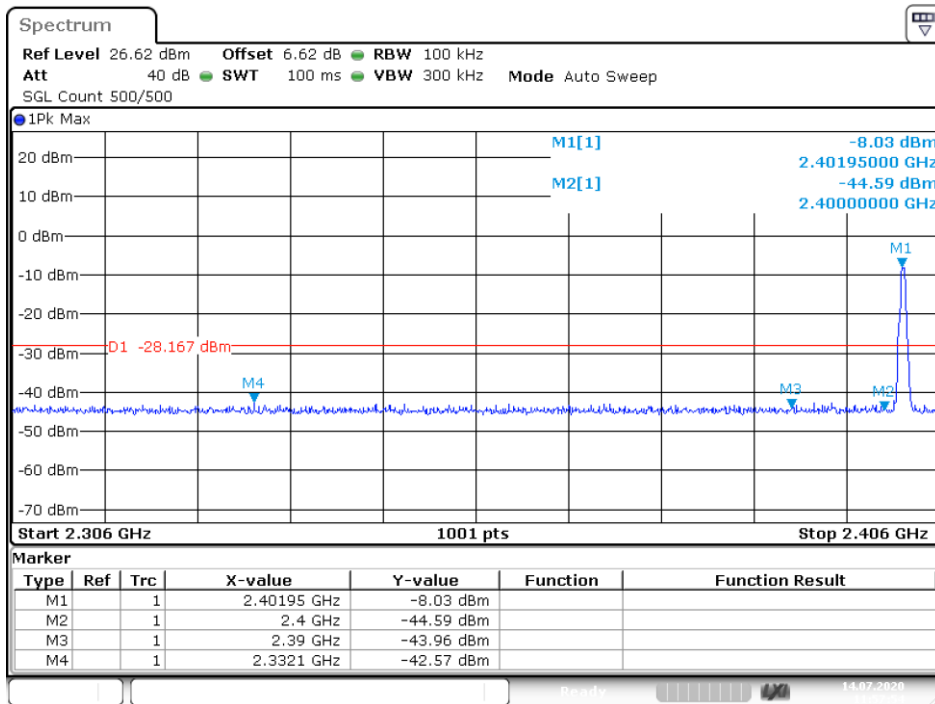


Date: 14.JUL.2020 11:57:53


Band Edge NVNT 1-DH1 2480MHz Ant1 Hopping Ref

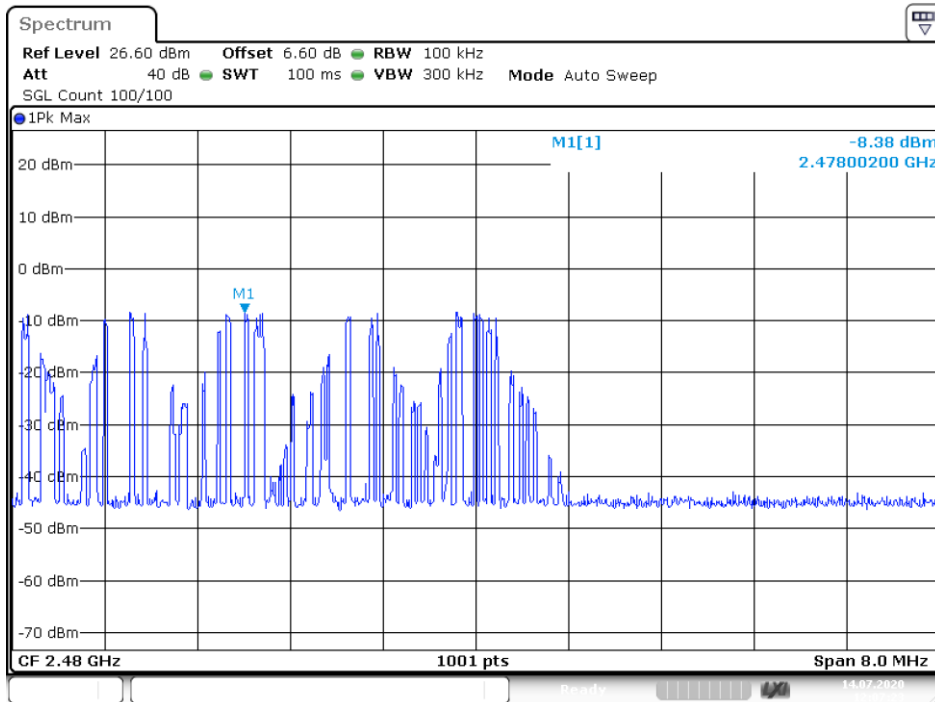


Band Edge NVNT 1-DH1 2480MHz Ant1 Hopping Emission

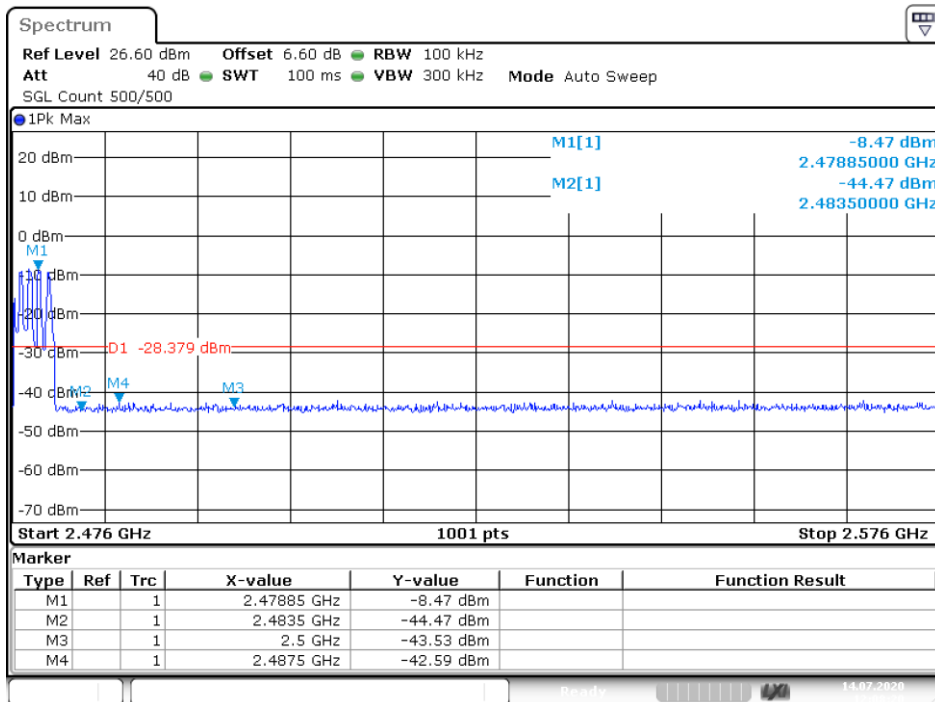


Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Ref

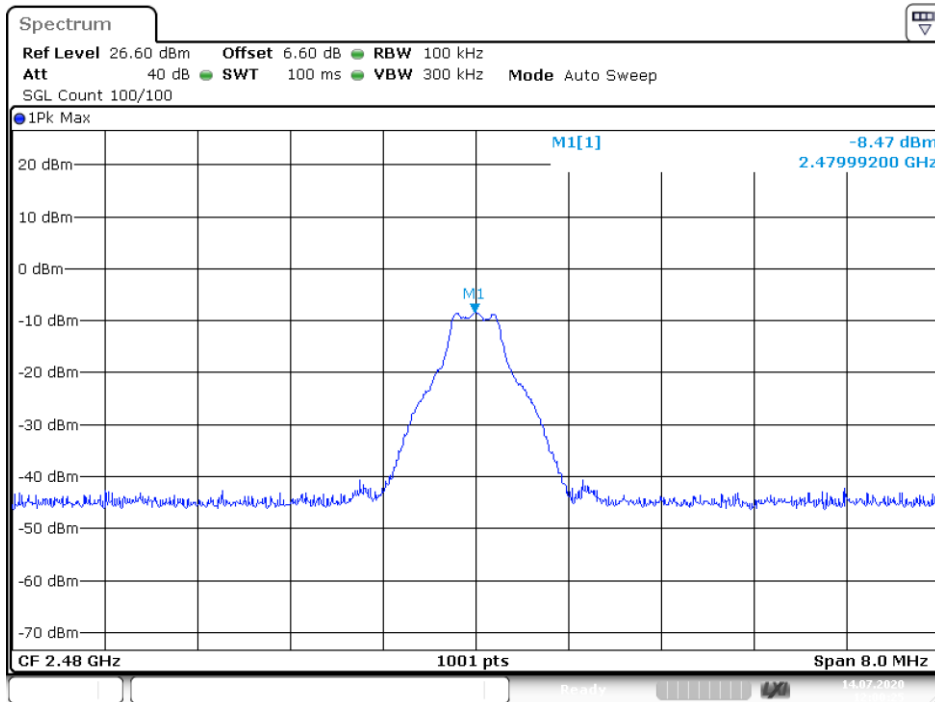


Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Emission

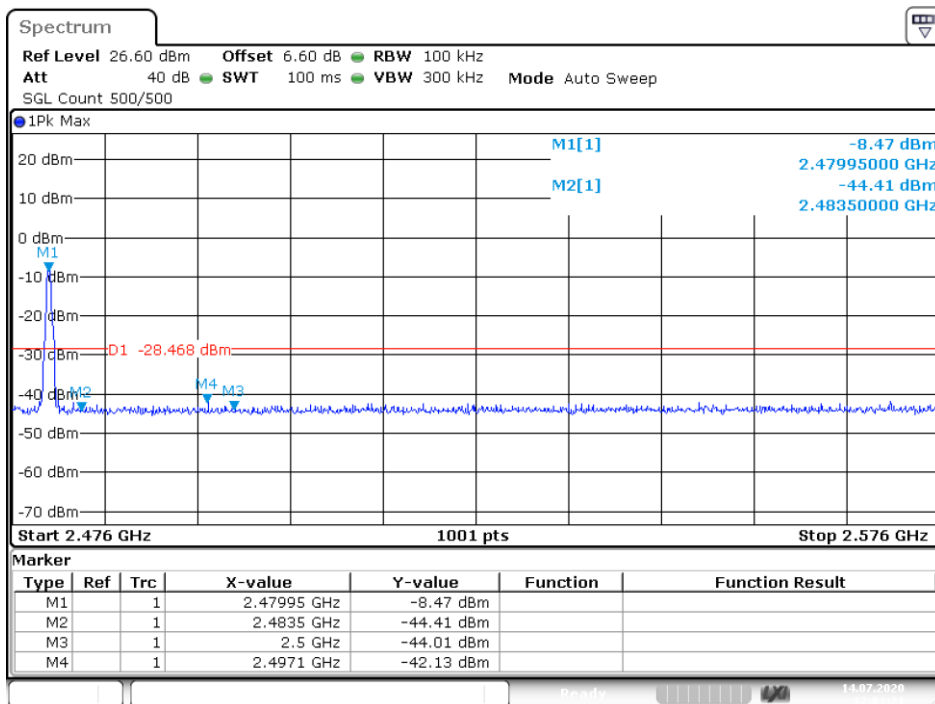


Band Edge NVNT 2-DH1 2402MHz Ant1 Hopping Ref

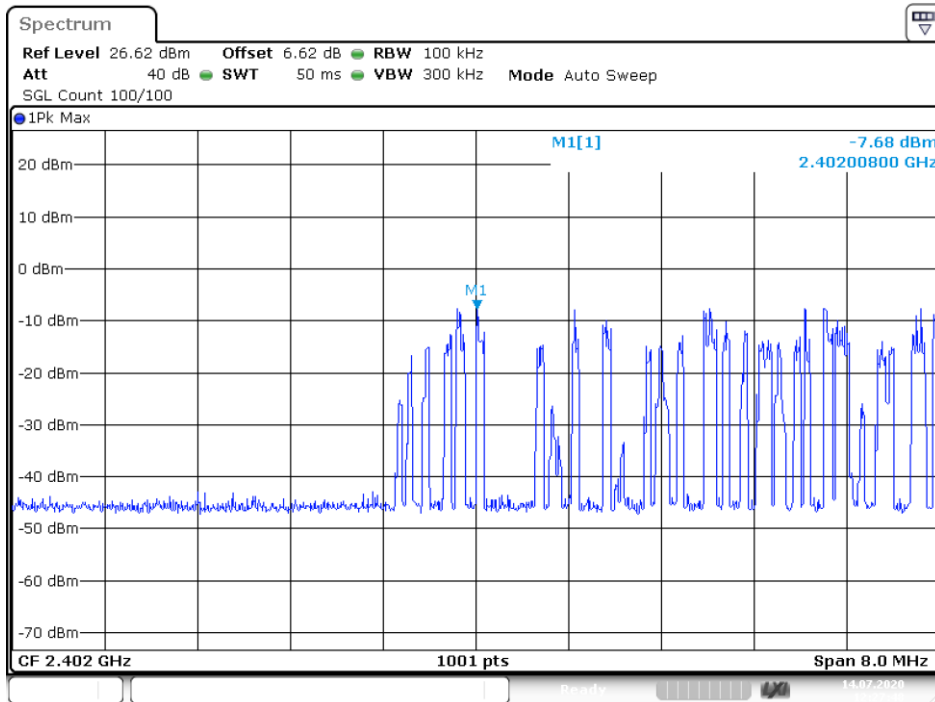

Band Edge NVNT 2-DH1 2402MHz Ant1 Hopping Emission

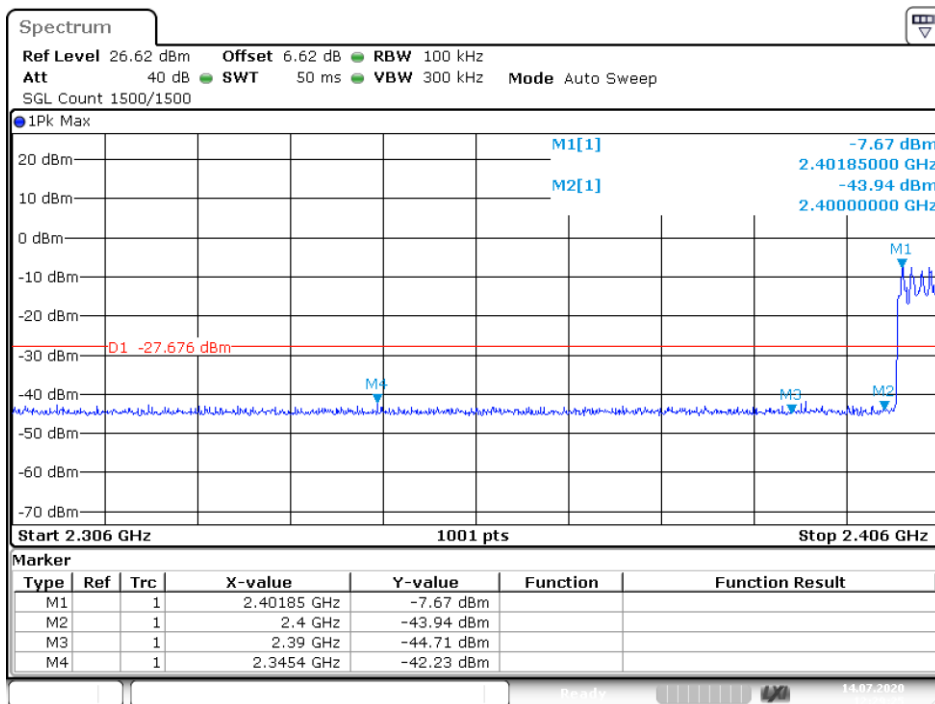


Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Ref

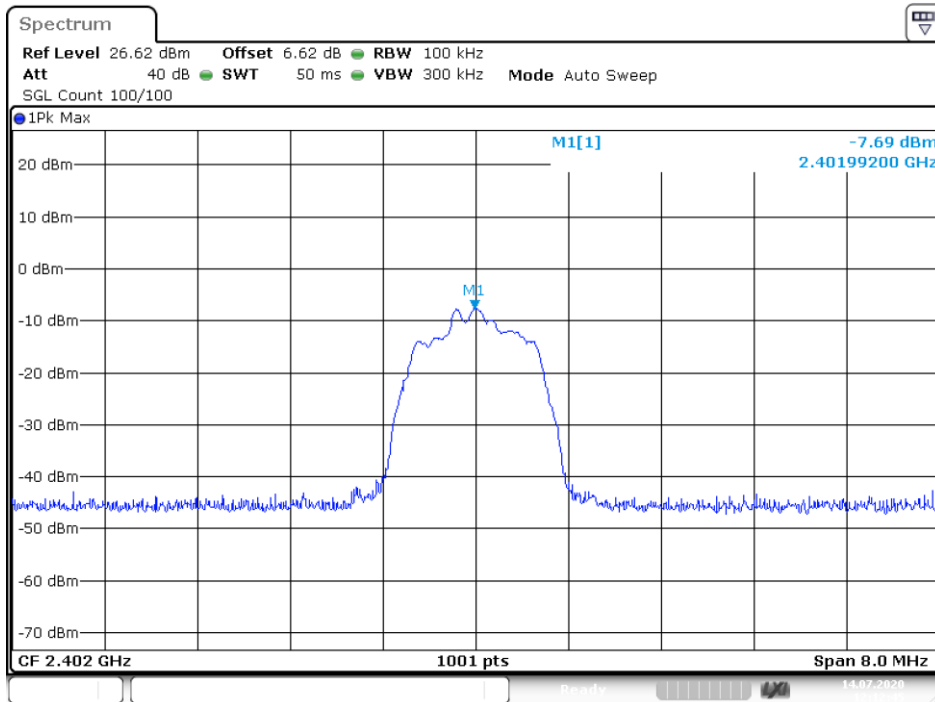


Date: 14.JUL.2020 12:12:44

Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Emission

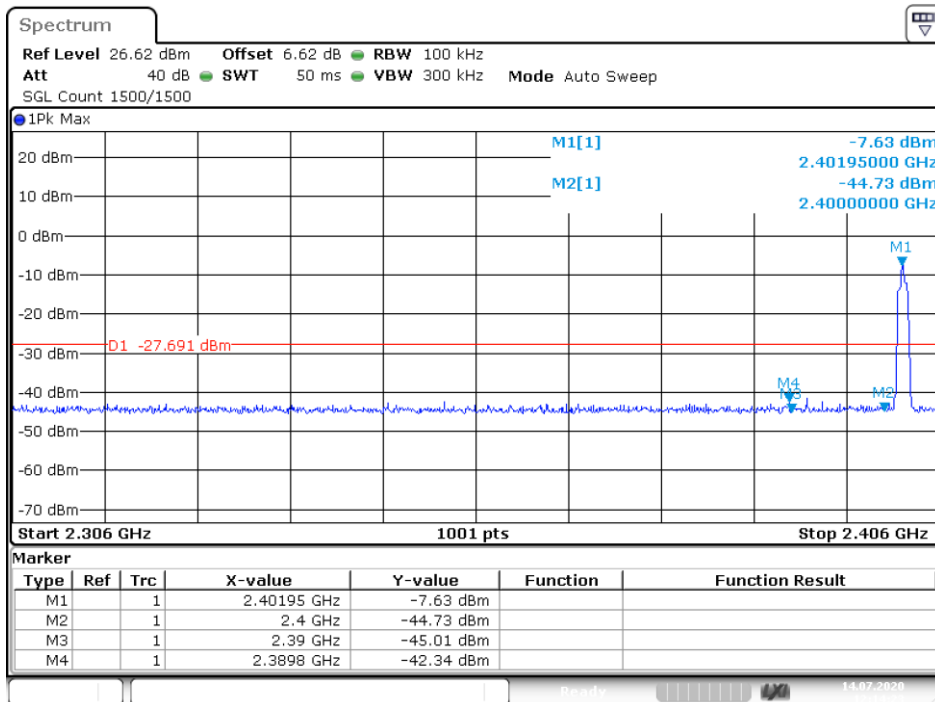


Date: 14.JUL.2020 12:14:23


Band Edge NVNT 2-DH1 2480MHz Ant1 Hopping Ref

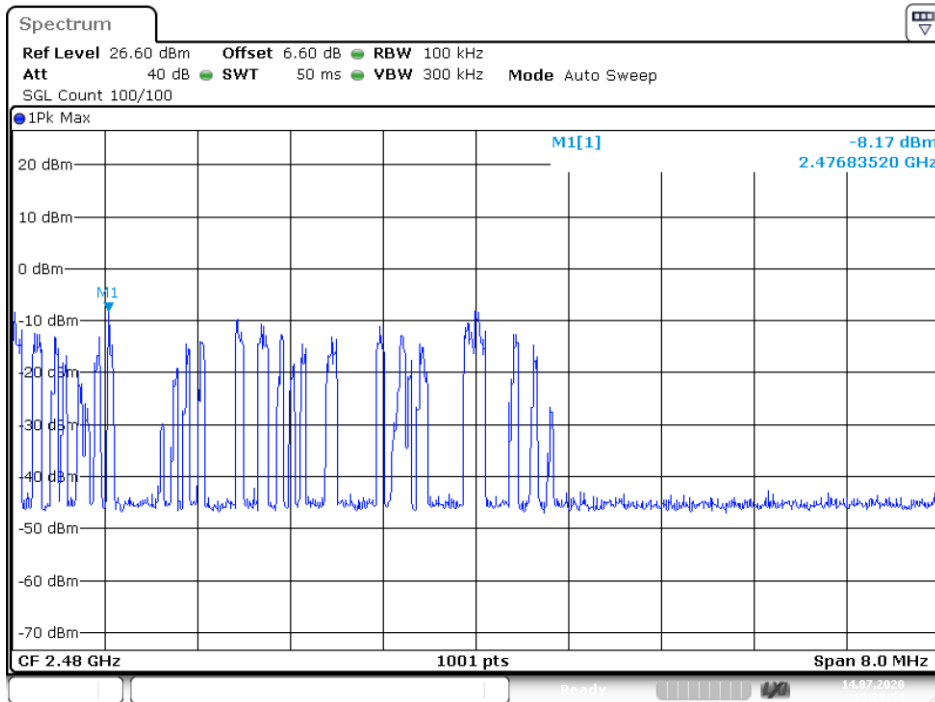

Band Edge NVNT 2-DH1 2480MHz Ant1 Hopping Emission

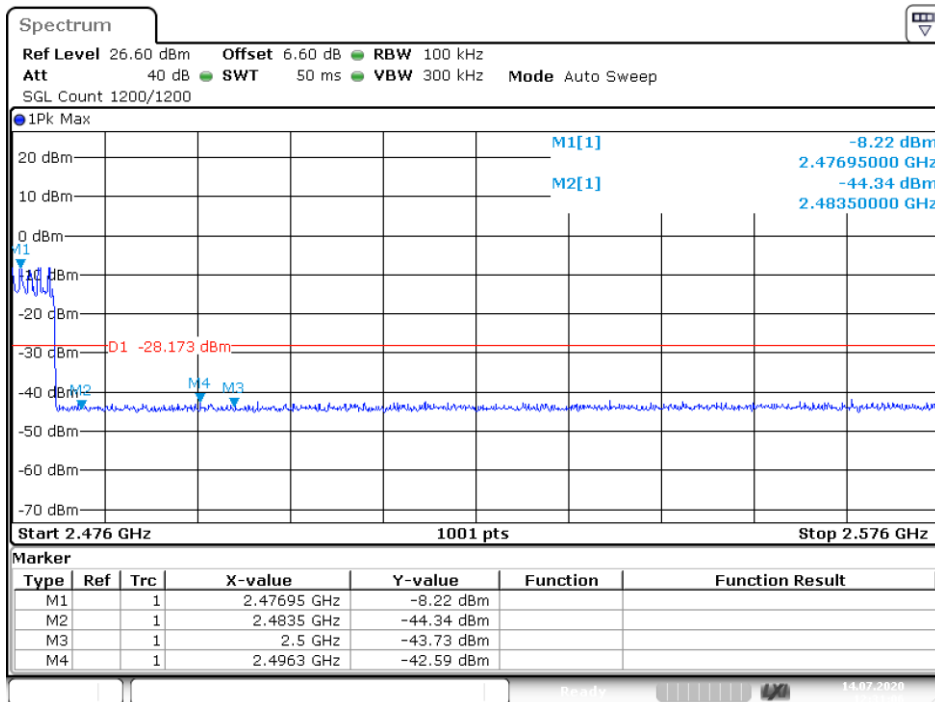


Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Ref

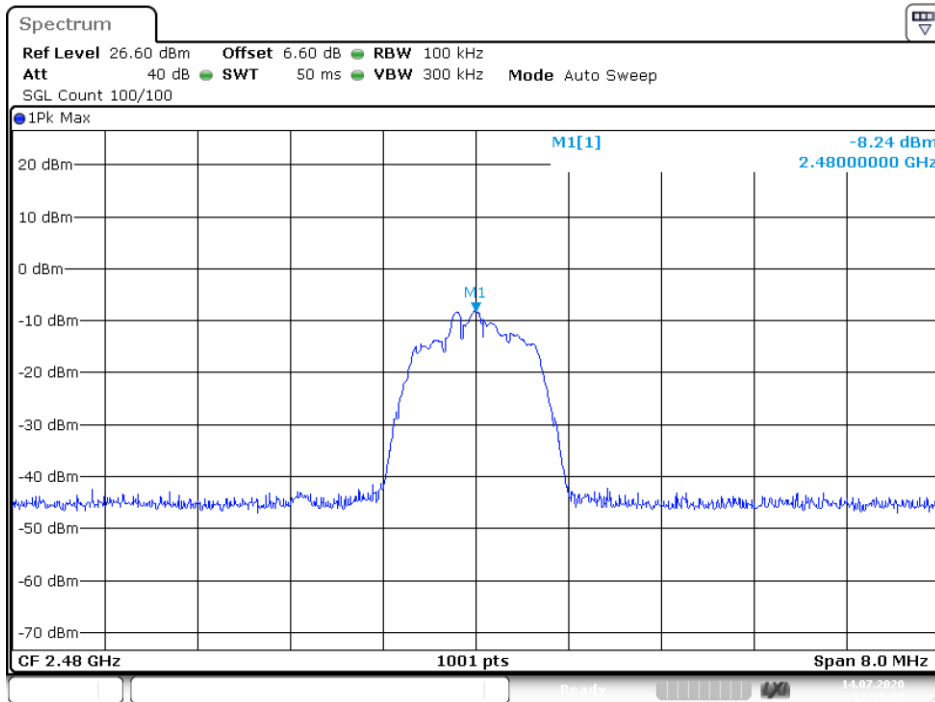

Date: 14.JUL.2020 12:19:57


Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Emission

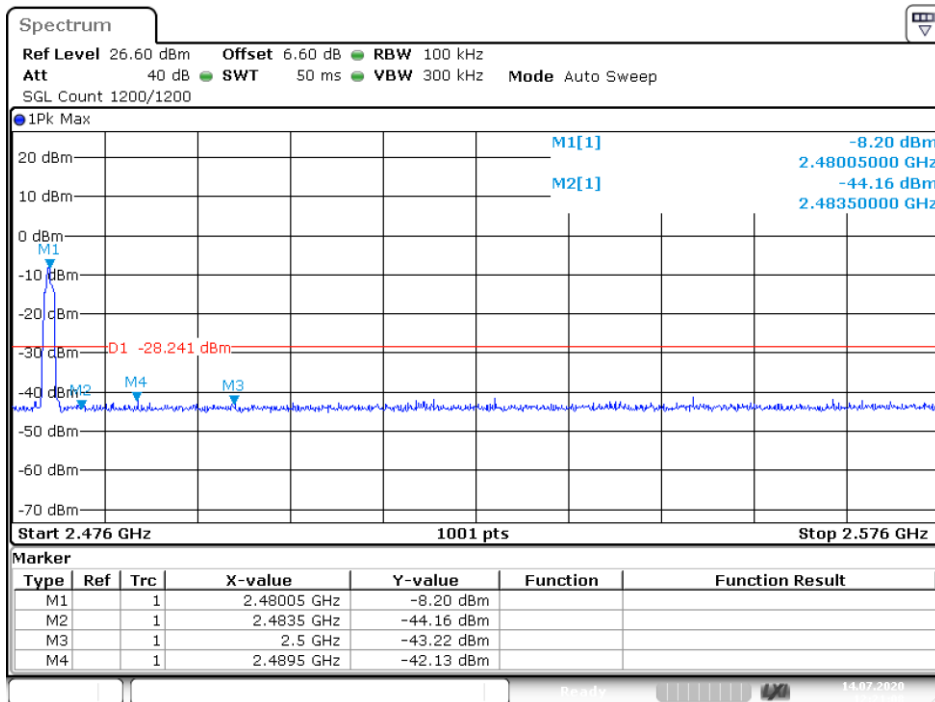

Date: 14.JUL.2020 12:21:08

10. Power Line Conducted Emissions

10.1. Block Diagram of Test Setup

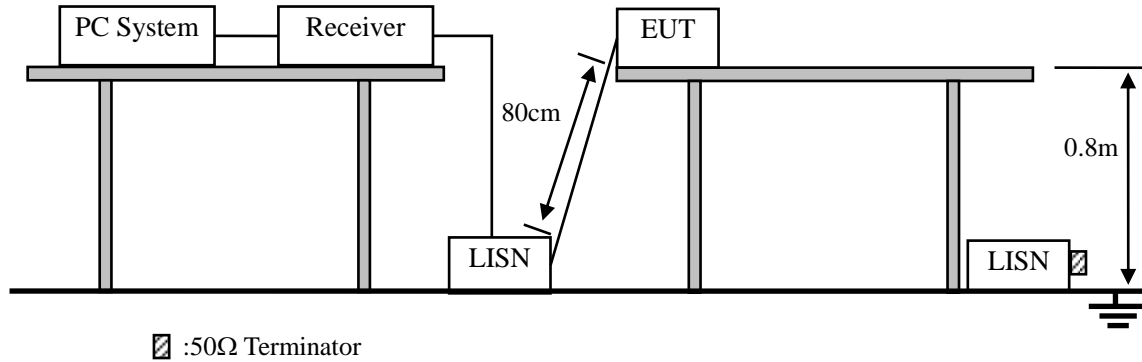

10.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

10.3. Test Procedure


- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

10.4. Test Result

PASS. (See below detailed test data)


Note: If peak Result comply with AV limit, QP and AV Result is deemed to comply with AV limit

Pol | **Line**

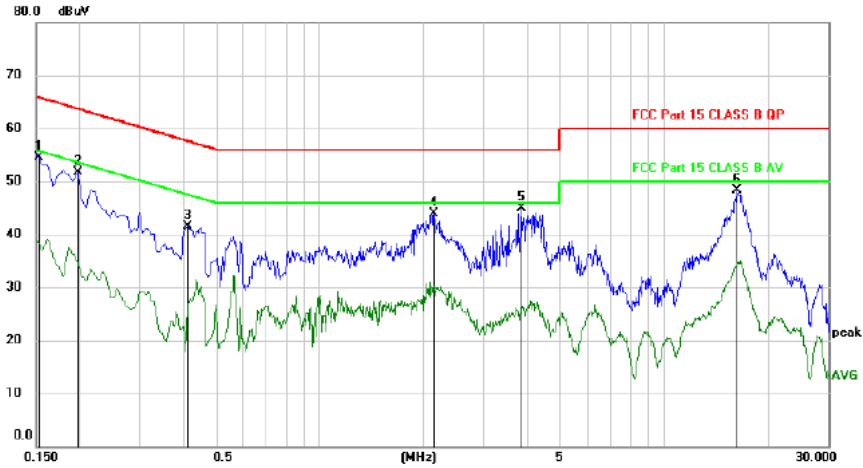

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1524	44.52	9.94	54.46	65.87	-11.41	peak	
2		0.1980	41.82	9.92	51.74	63.69	-11.95	peak	
3		0.4140	31.64	9.94	41.58	57.57	-15.99	peak	
4		2.1540	34.03	9.88	43.91	56.00	-12.09	peak	
5	*	3.8400	34.97	9.96	44.93	56.00	-11.07	peak	
6		16.2780	37.89	10.37	48.26	60.00	-11.74	peak	

Pol | **Neutral**

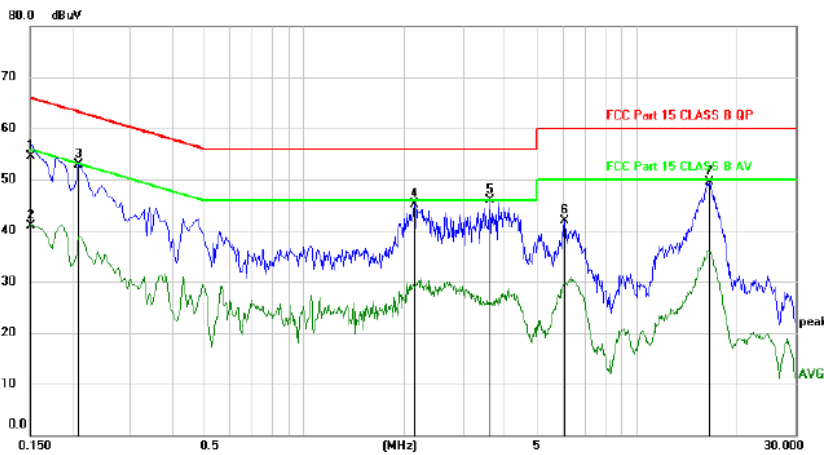

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	44.49	9.94	54.43	66.00	-11.57	QP	
2		0.1500	30.93	9.94	40.87	56.00	-15.13	AVG	
3		0.2100	43.02	9.93	52.95	63.21	-10.26	peak	
4		2.1540	35.12	9.89	45.01	56.00	-10.99	peak	
5	*	3.6360	36.03	9.96	45.99	56.00	-10.01	peak	
6		6.0720	31.81	10.08	41.89	60.00	-18.11	peak	
7		16.5540	39.08	10.37	49.45	60.00	-10.55	peak	

*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Remark: All modes have been tested, and only worst data of Charging was listed in this report.

11. Antenna Requirements

11.1. Limit



For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. Result

The EUT antenna is chip antenna. It complies with the standard requirement.

12. Test Setup Photo

12.1. Photos of Radiated emission

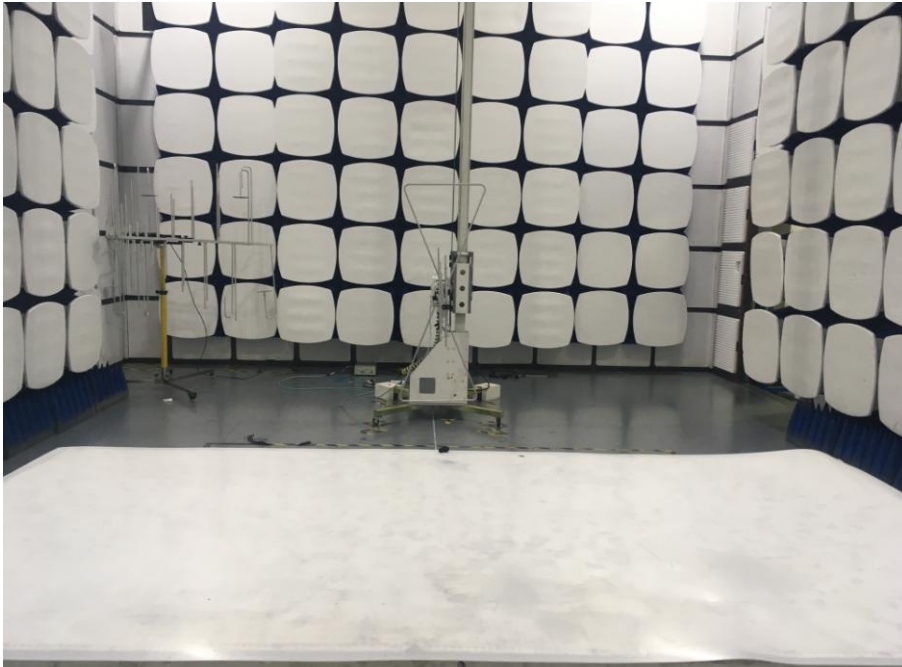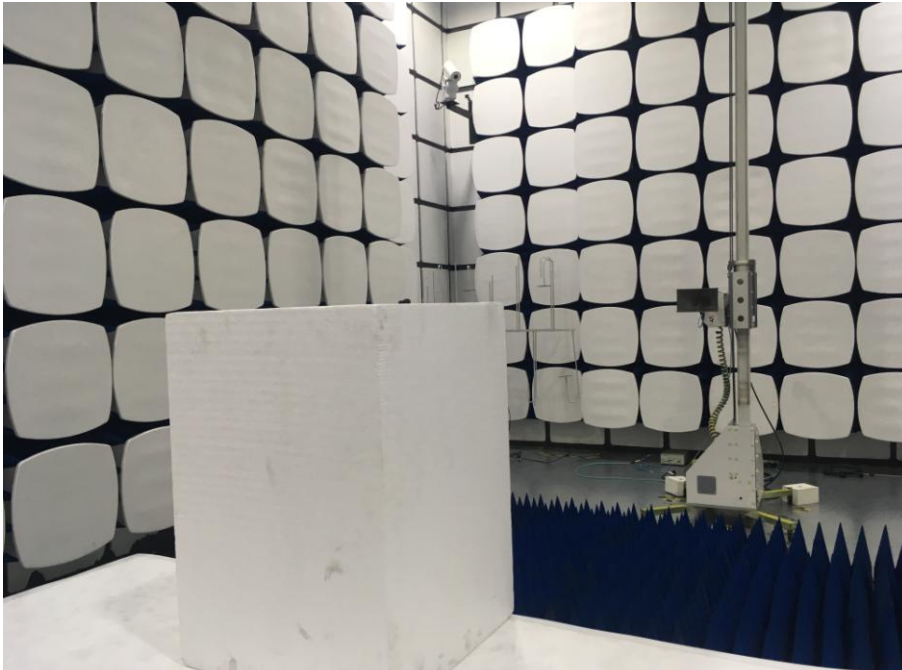




13.Photos Of EUT







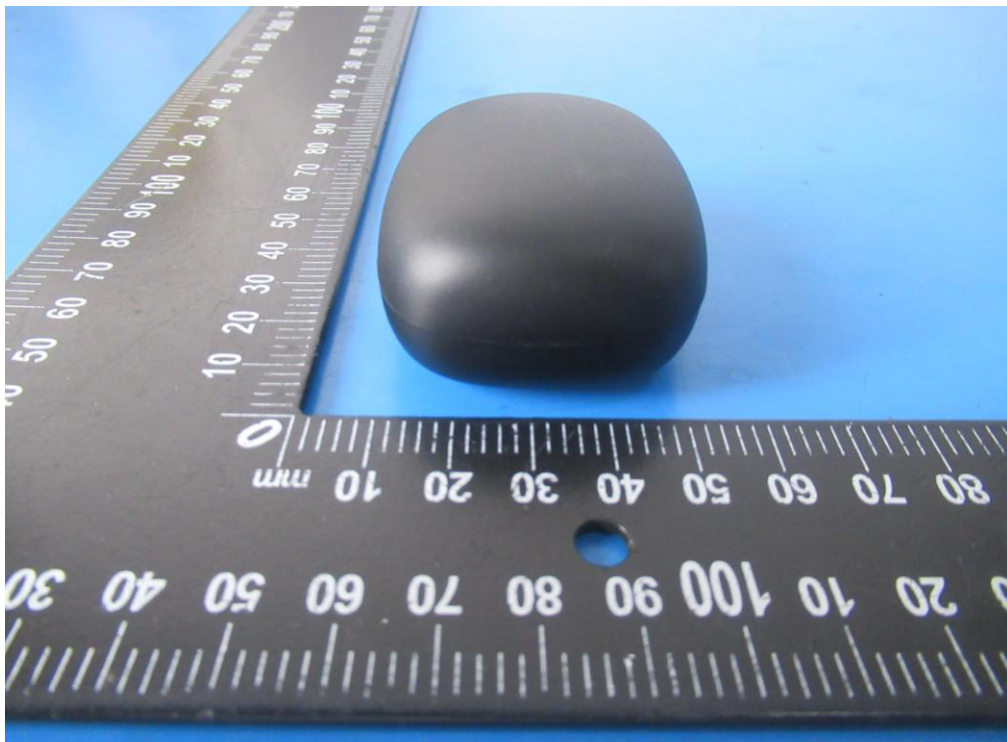










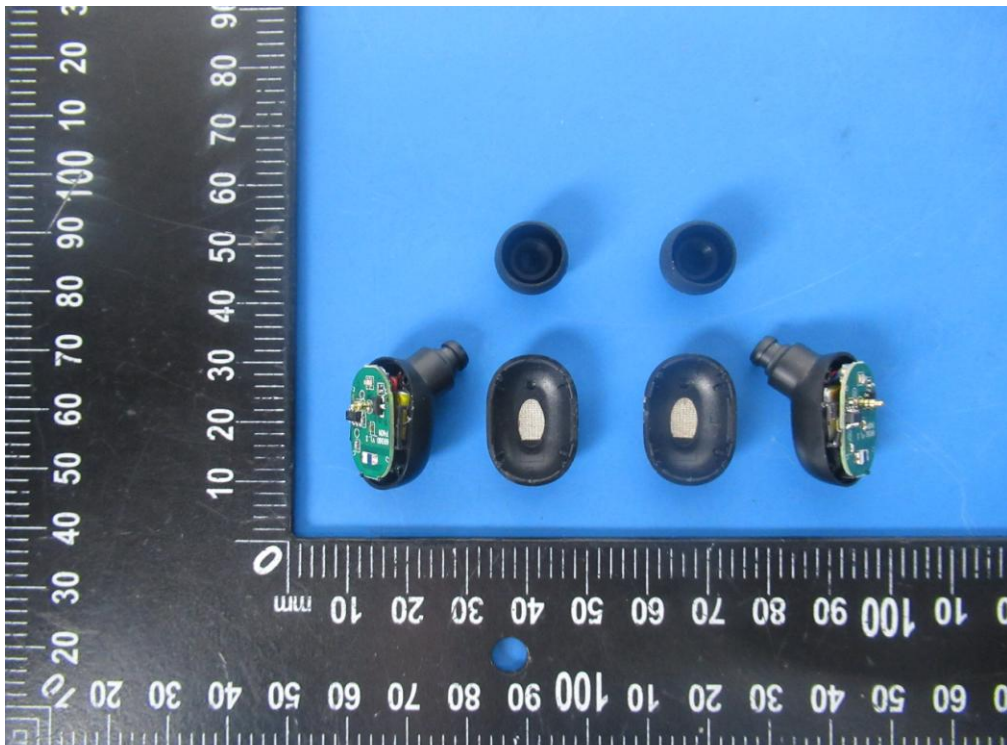

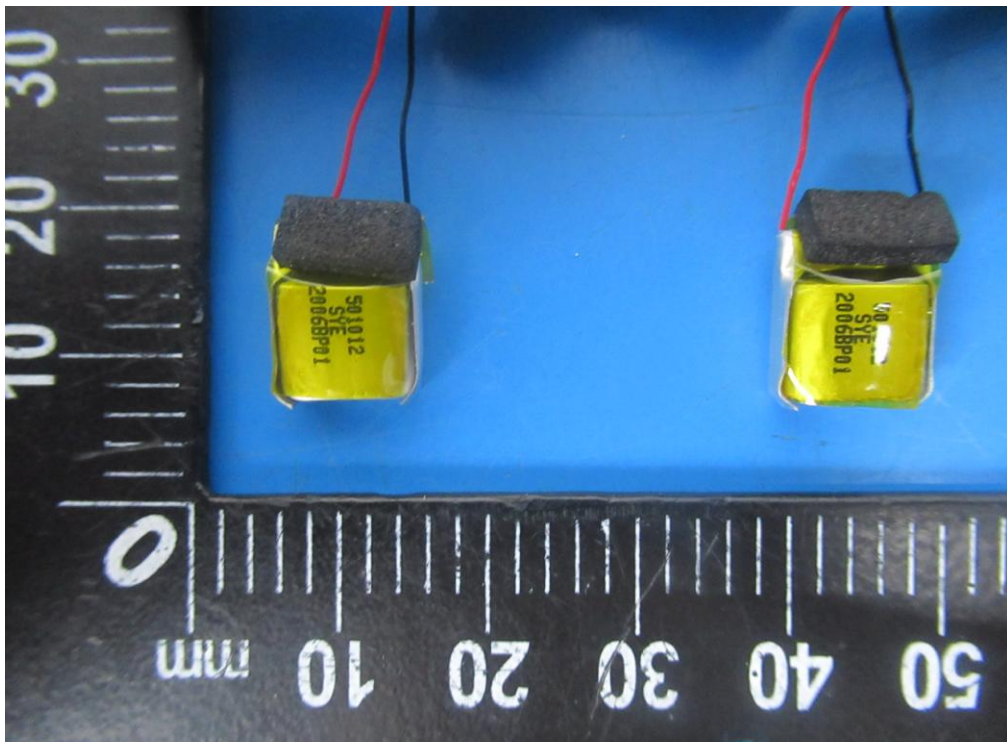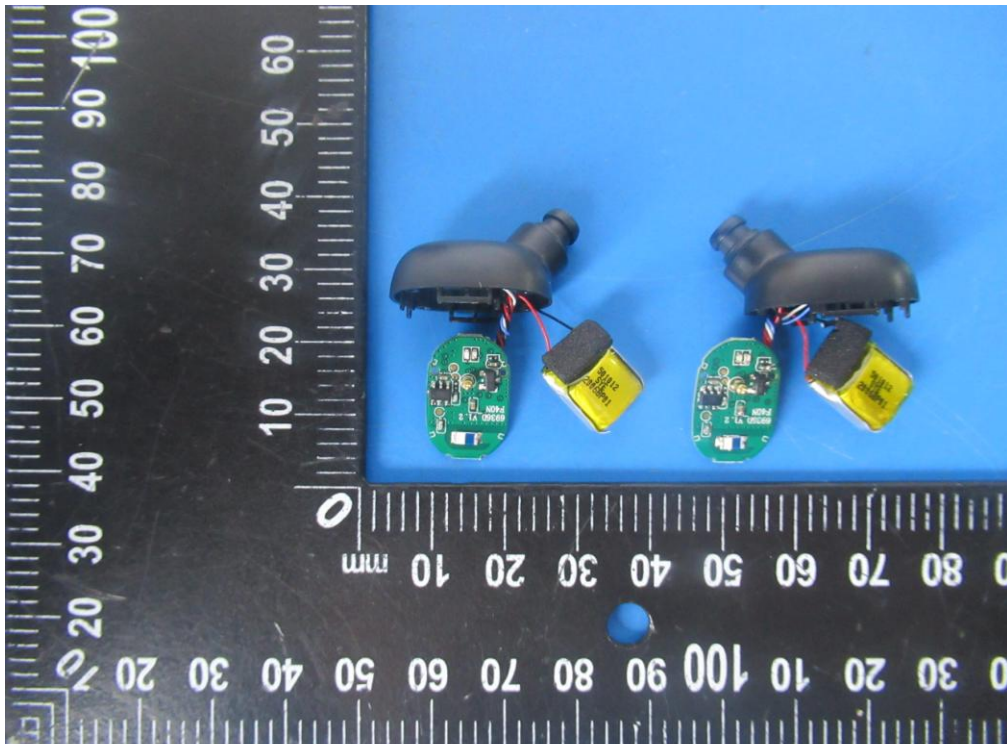

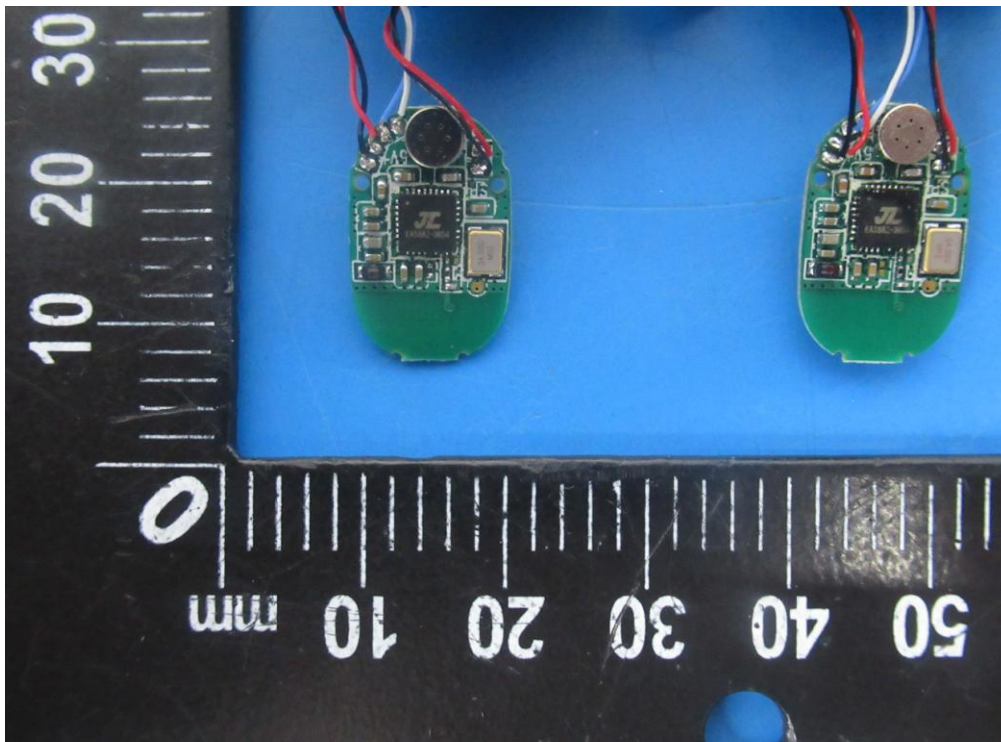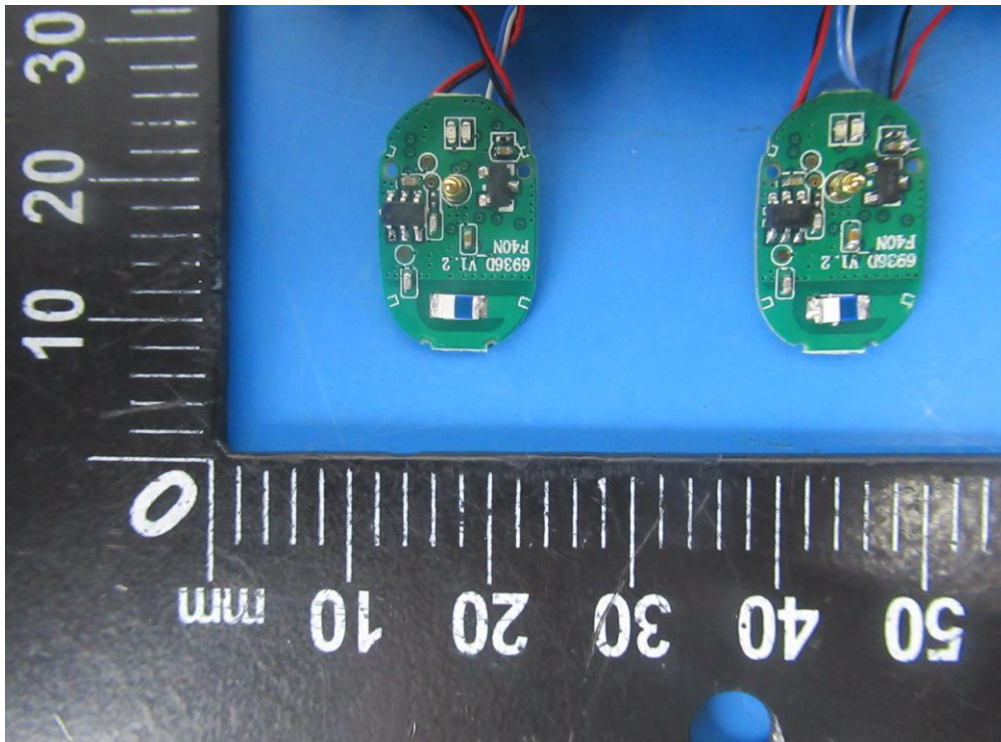

-----THE END OF REPORT-----